


Site: WZ-AC2	Test Date: 2024-03-06
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

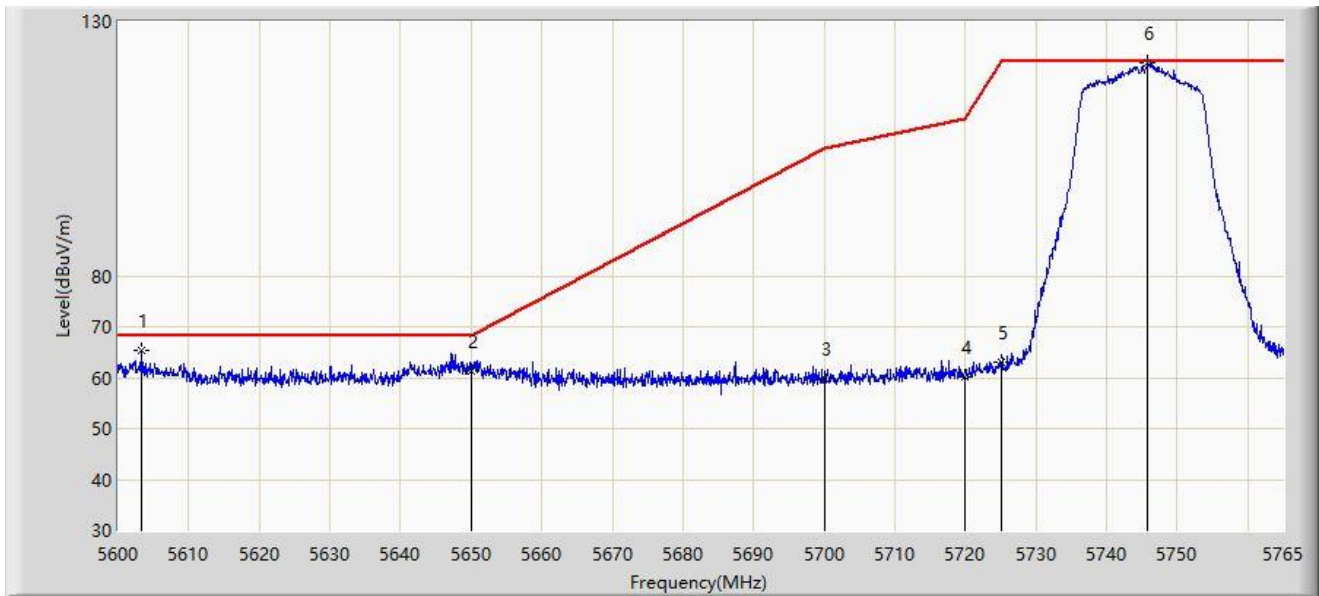


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5603.382	65.272	61.743	-2.928	68.200	3.529	PK
2		5650.000	61.376	57.253	-6.824	68.200	4.122	PK
3		5700.000	59.837	55.400	-45.363	105.200	4.437	PK
4		5720.000	60.201	55.537	-50.599	110.800	4.663	PK
5		5725.000	62.956	58.253	-59.244	122.200	4.703	PK
6		5745.860	121.852	117.479	N/A	N/A	4.372	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-06
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

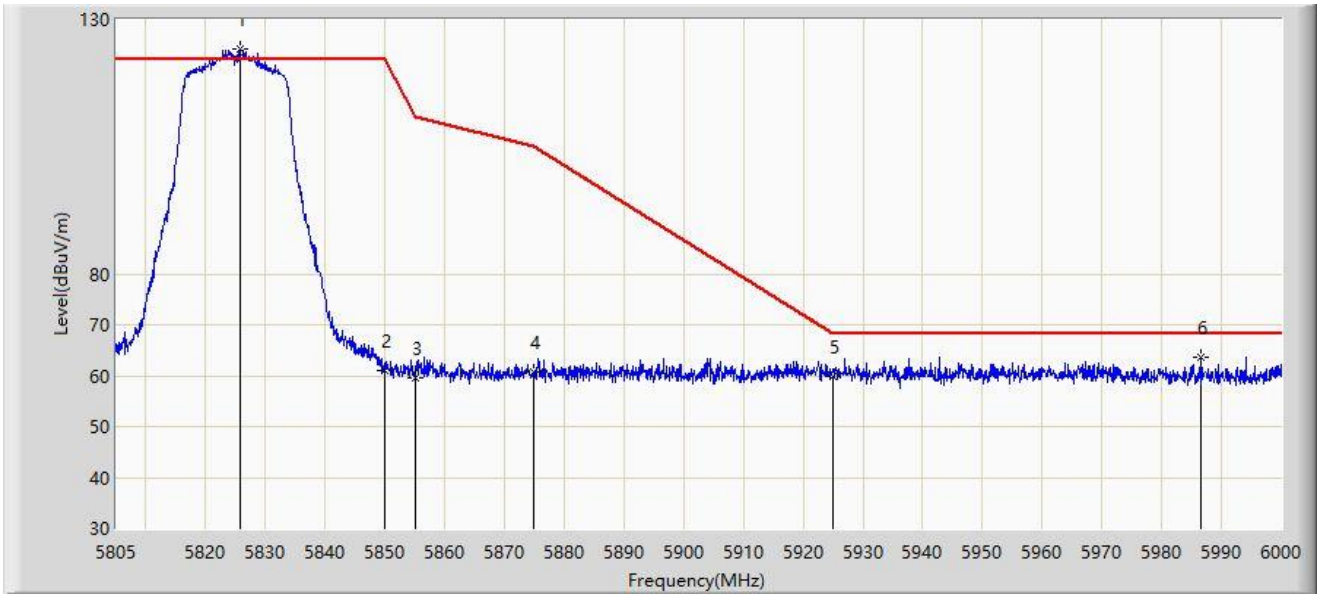


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5825.768	124.281	119.424	N/A	N/A	4.857	PK
2		5850.000	61.145	56.162	-61.055	122.200	4.984	PK
3		5855.000	59.683	54.645	-51.117	110.800	5.038	PK
4		5875.000	60.660	55.529	-44.540	105.200	5.131	PK
5		5925.000	59.817	54.582	-8.383	68.200	5.236	PK
6	*	5986.447	63.520	58.236	-4.680	68.200	5.285	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-06
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

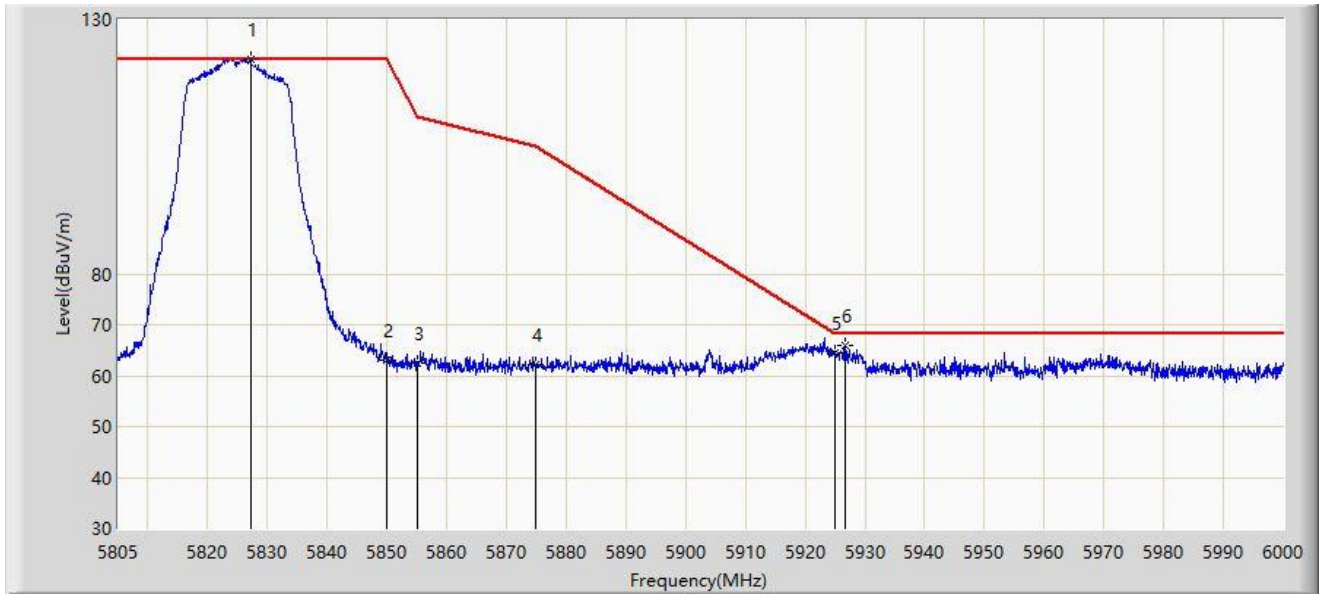


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5827.230	122.166	117.326	N/A	N/A	4.840	PK
2		5850.000	63.184	58.201	-59.016	122.200	4.984	PK
3		5855.000	62.329	57.291	-48.471	110.800	5.038	PK
4		5875.000	62.223	57.092	-42.977	105.200	5.131	PK
5		5925.000	64.452	59.217	-3.748	68.200	5.236	PK
6	*	5926.583	65.802	60.557	-2.398	68.200	5.246	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

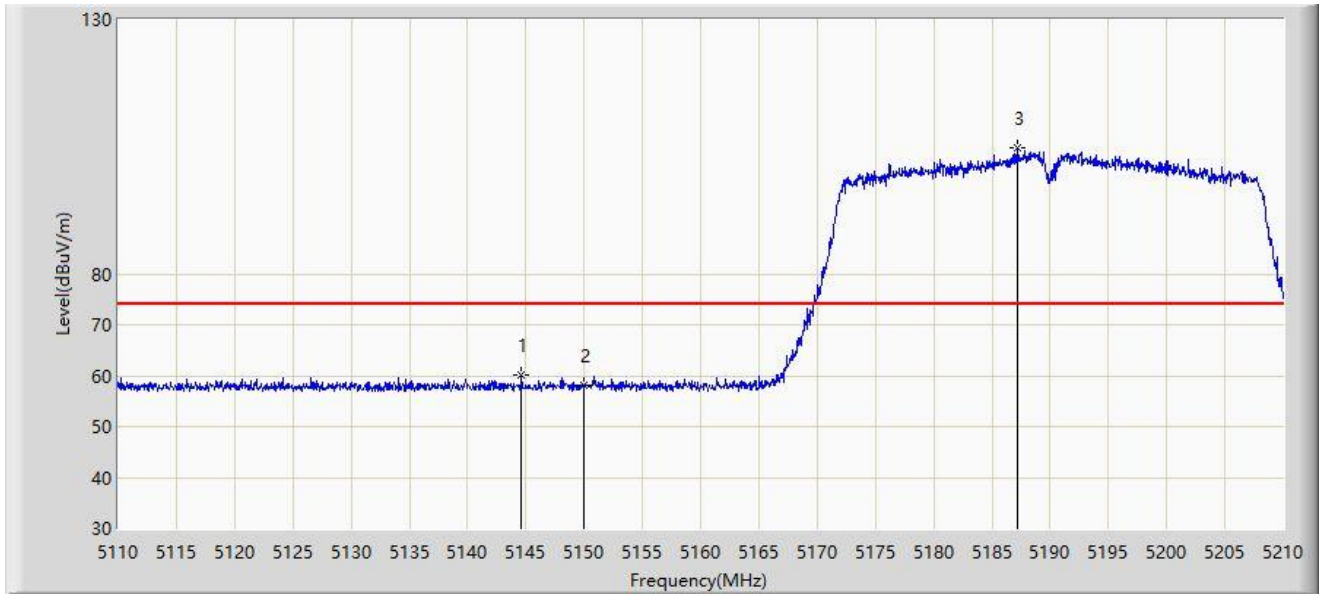


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5144.600	60.116	56.683	-13.884	74.000	3.433	PK
2		5150.000	58.228	54.746	-15.772	74.000	3.482	PK
3		5187.150	104.727	101.616	N/A	N/A	3.111	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

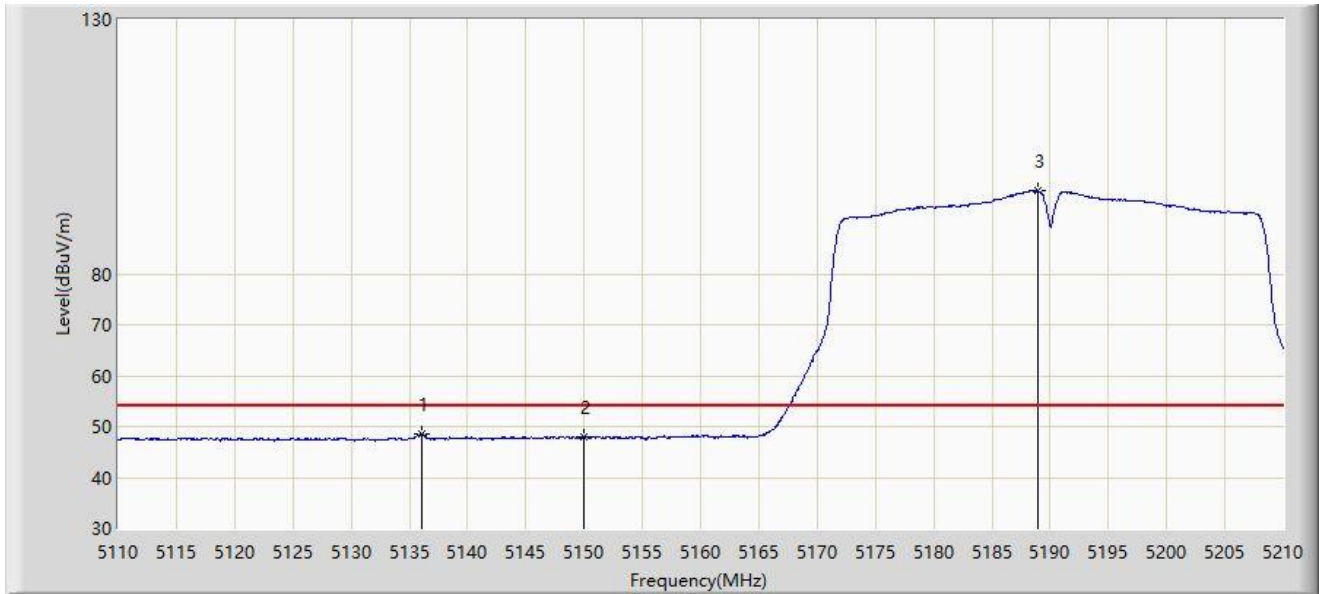


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5136.100	48.487	45.162	-5.513	54.000	3.325	AV
2		5150.000	47.906	44.424	-6.094	54.000	3.482	AV
3		5188.950	96.305	93.233	N/A	N/A	3.072	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

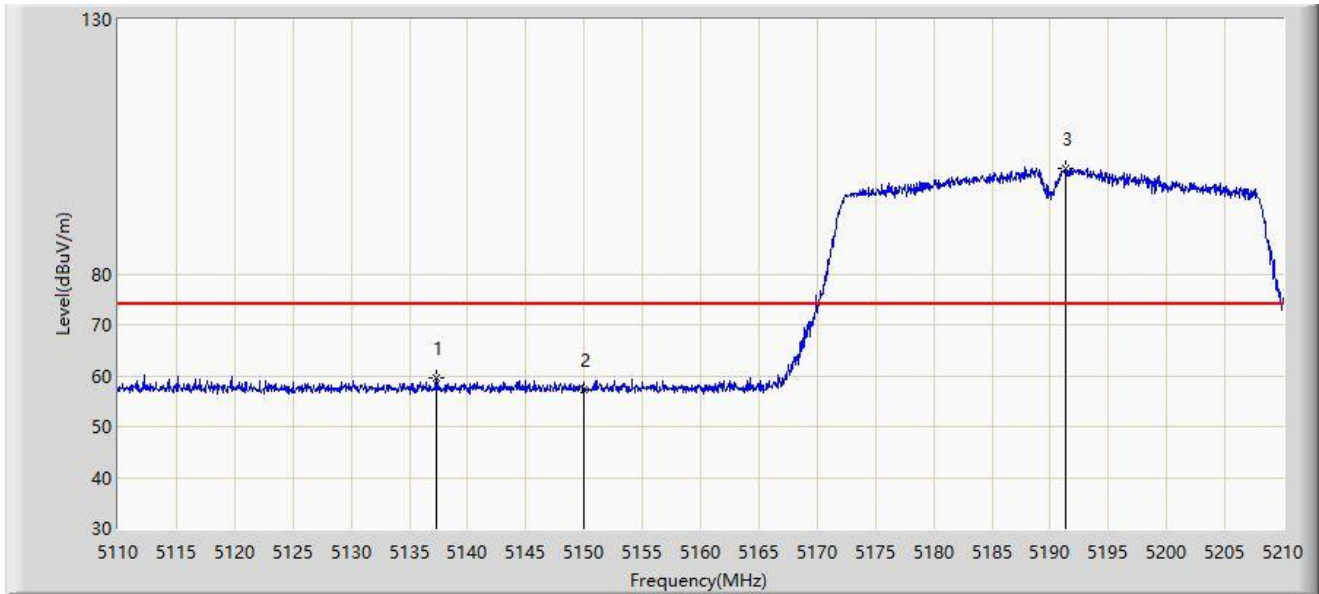


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5137.350	59.563	56.222	-14.437	74.000	3.341	PK
2		5150.000	57.206	53.724	-16.794	74.000	3.482	PK
3		5191.300	100.733	97.712	N/A	N/A	3.021	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

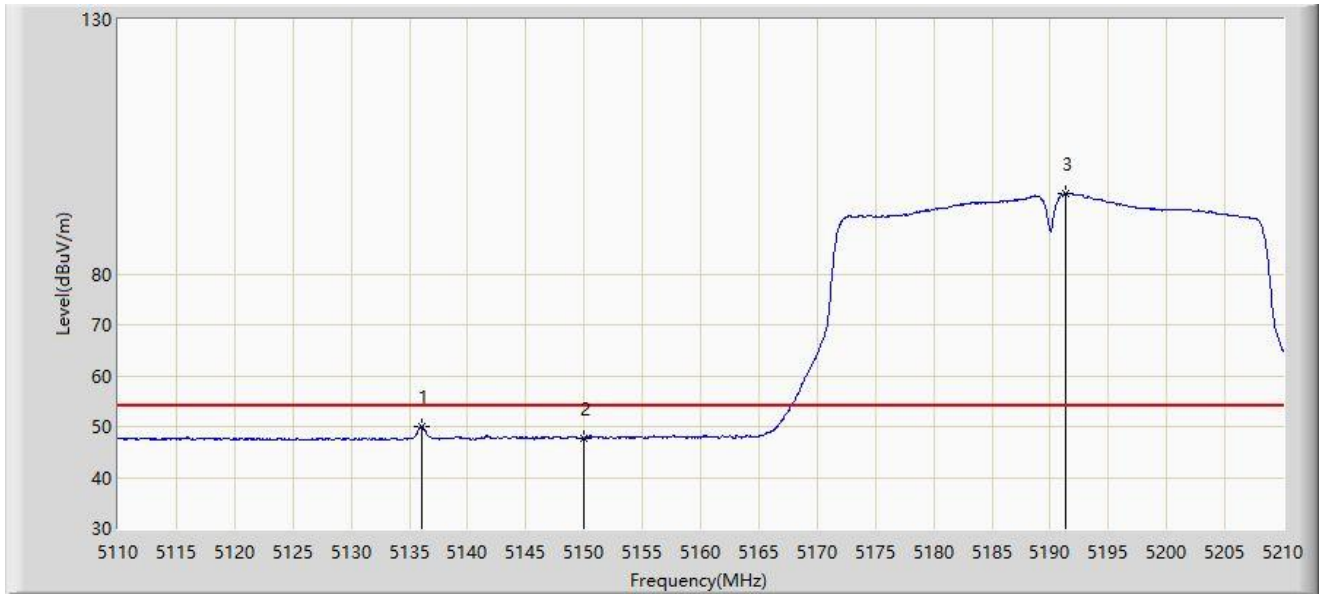


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5136.100	50.053	46.728	-3.947	54.000	3.325	AV
2		5150.000	47.809	44.327	-6.191	54.000	3.482	AV
3		5191.300	95.849	92.828	N/A	N/A	3.021	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-06
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

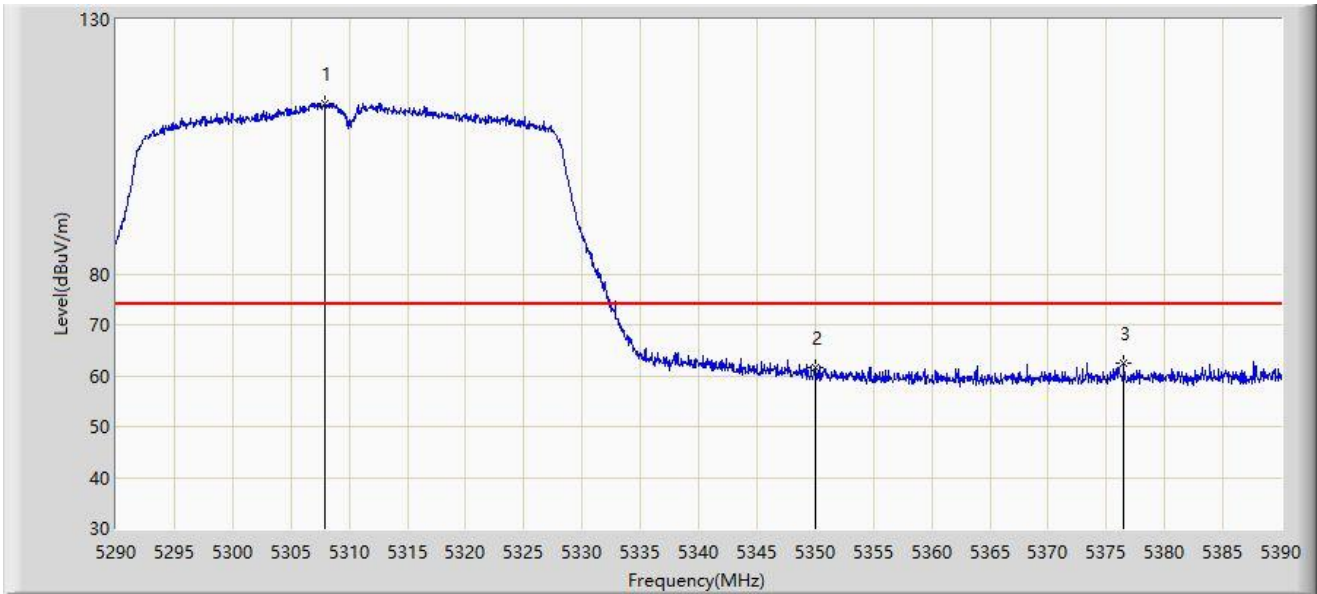


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5307.900	113.425	110.581	N/A	N/A	2.844	PK
2		5350.000	61.466	58.646	-12.534	74.000	2.820	PK
3	*	5376.500	62.324	59.317	-11.676	74.000	3.007	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-06
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

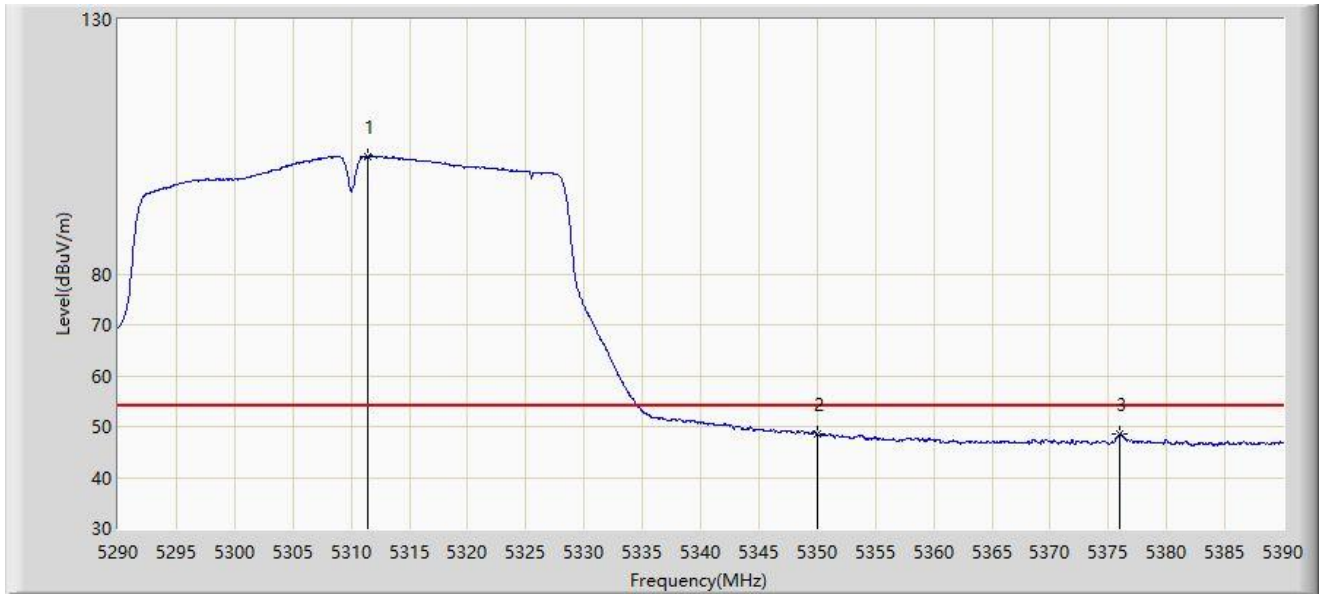


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.450	103.170	100.271	N/A	N/A	2.899	AV
2		5350.000	48.516	45.696	-5.484	54.000	2.820	AV
3	*	5376.000	48.541	45.544	-5.459	54.000	2.997	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

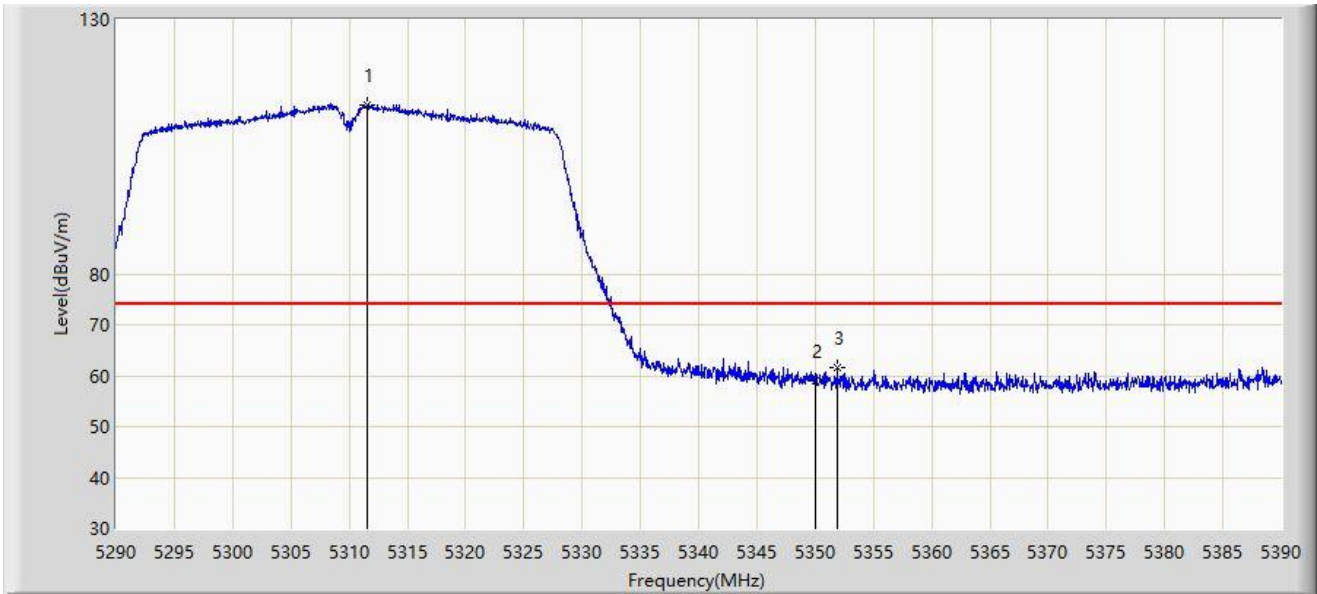


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.550	113.135	110.235	N/A	N/A	2.901	PK
2		5350.000	59.125	56.305	-14.875	74.000	2.820	PK
3	*	5351.850	61.549	58.760	-12.451	74.000	2.789	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

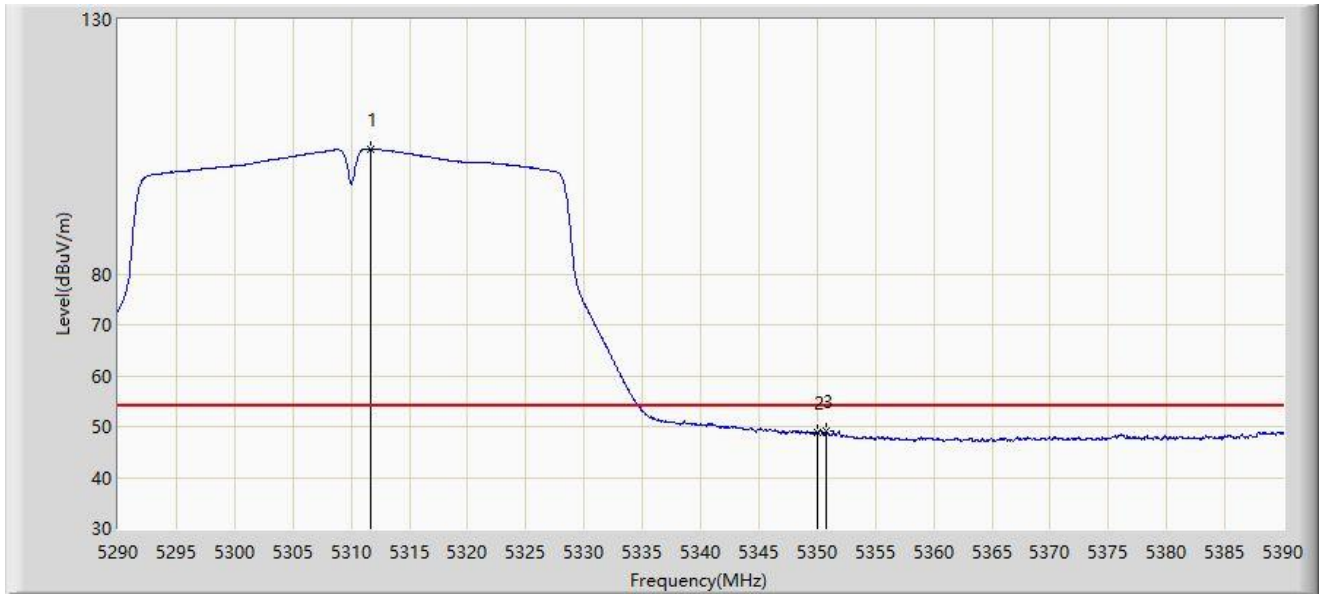


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.700	104.609	101.706	N/A	N/A	2.903	AV
2		5350.000	48.734	45.914	-5.266	54.000	2.820	AV
3	*	5350.750	49.120	46.313	-4.880	54.000	2.807	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-20
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

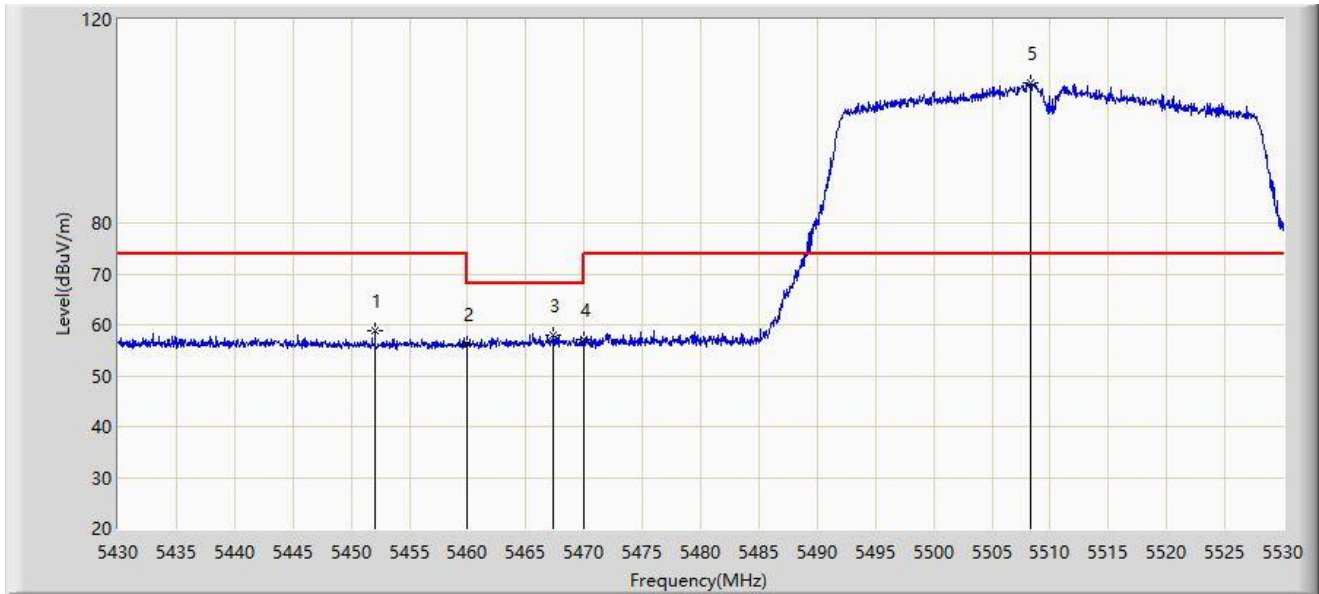


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5452.050	58.789	55.730	-15.211	74.000	3.059	PK
2		5460.000	56.140	52.991	-17.860	74.000	3.149	PK
3	*	5467.400	57.872	54.580	-10.328	68.200	3.292	PK
4		5470.000	57.101	53.759	-11.099	68.200	3.341	PK
5		5508.300	107.443	104.327	N/A	N/A	3.117	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-20
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

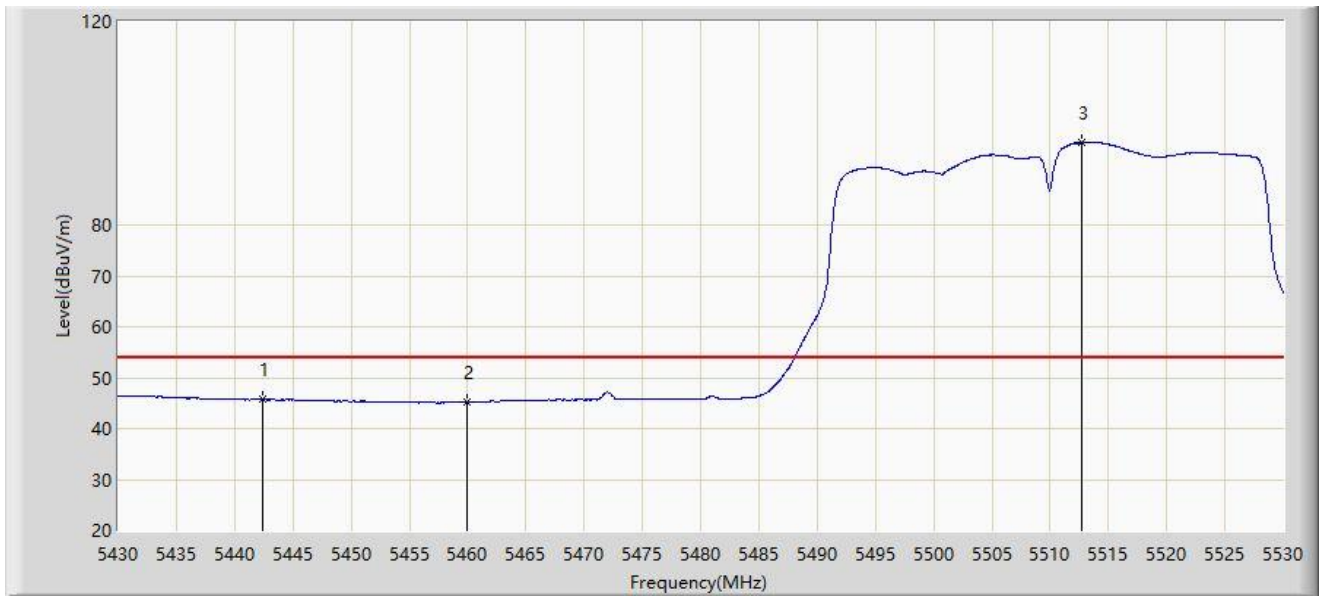


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5442.400	45.655	42.522	-8.345	54.000	3.133	AV
2		5460.000	45.157	42.008	-8.843	54.000	3.149	AV
3		5512.700	96.259	93.177	N/A	N/A	3.082	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-20
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

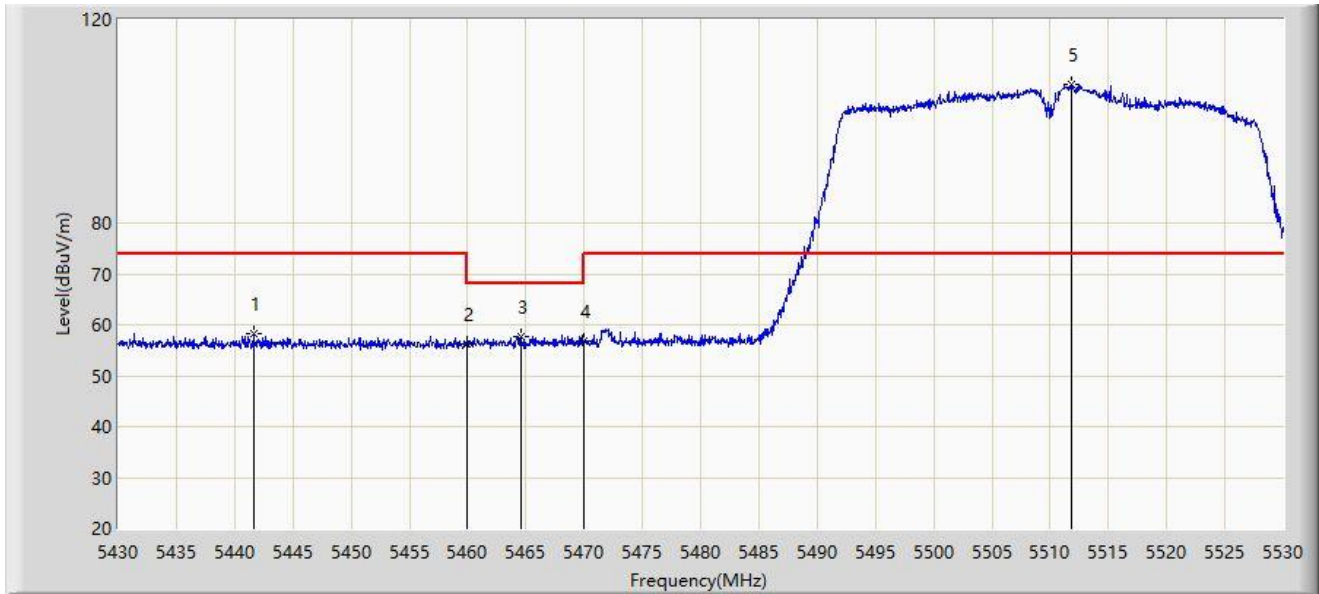


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5441.600	58.252	55.113	-15.748	74.000	3.139	PK
2		5460.000	56.115	52.966	-17.885	74.000	3.149	PK
3	*	5464.550	57.618	54.381	-10.582	68.200	3.237	PK
4		5470.000	56.699	53.357	-11.501	68.200	3.341	PK
5		5511.800	107.388	104.302	N/A	N/A	3.085	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-20
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

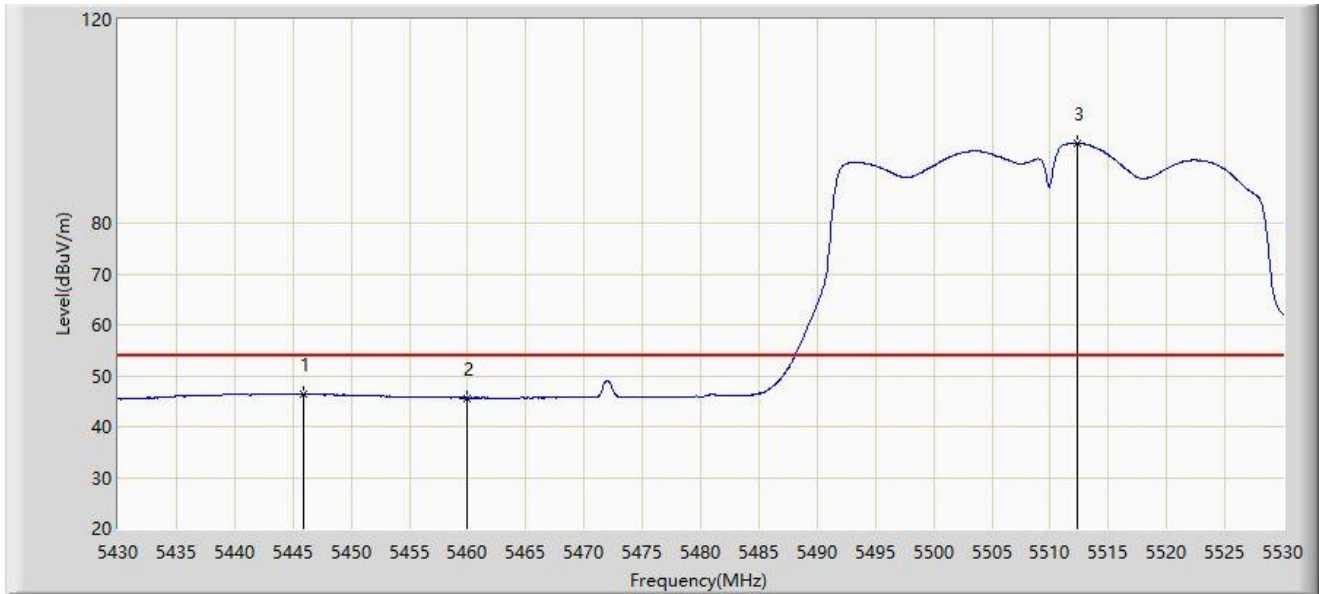


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5445.950	46.374	43.268	-7.626	54.000	3.106	AV
2		5460.000	45.632	42.483	-8.368	54.000	3.149	AV
3		5512.350	95.700	92.617	N/A	N/A	3.083	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-20
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

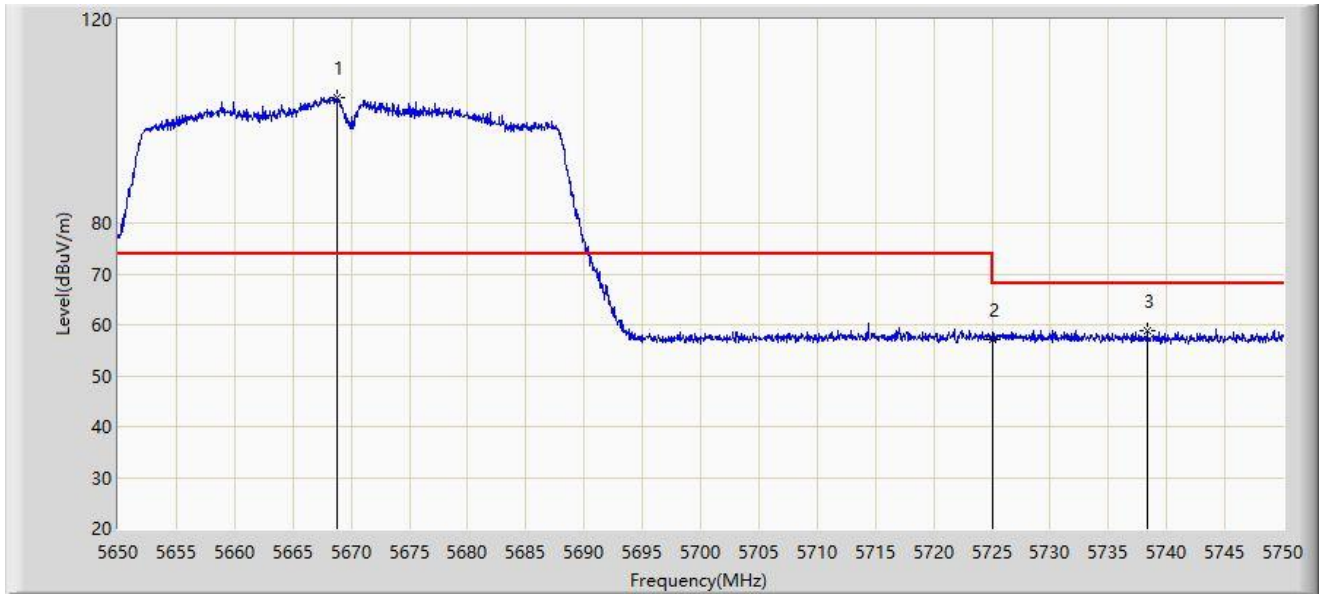


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5668.750	104.682	100.656	N/A	N/A	4.026	PK
2		5725.000	57.166	52.463	-11.034	68.200	4.703	PK
3	*	5738.350	58.846	54.350	-9.354	68.200	4.497	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-20
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

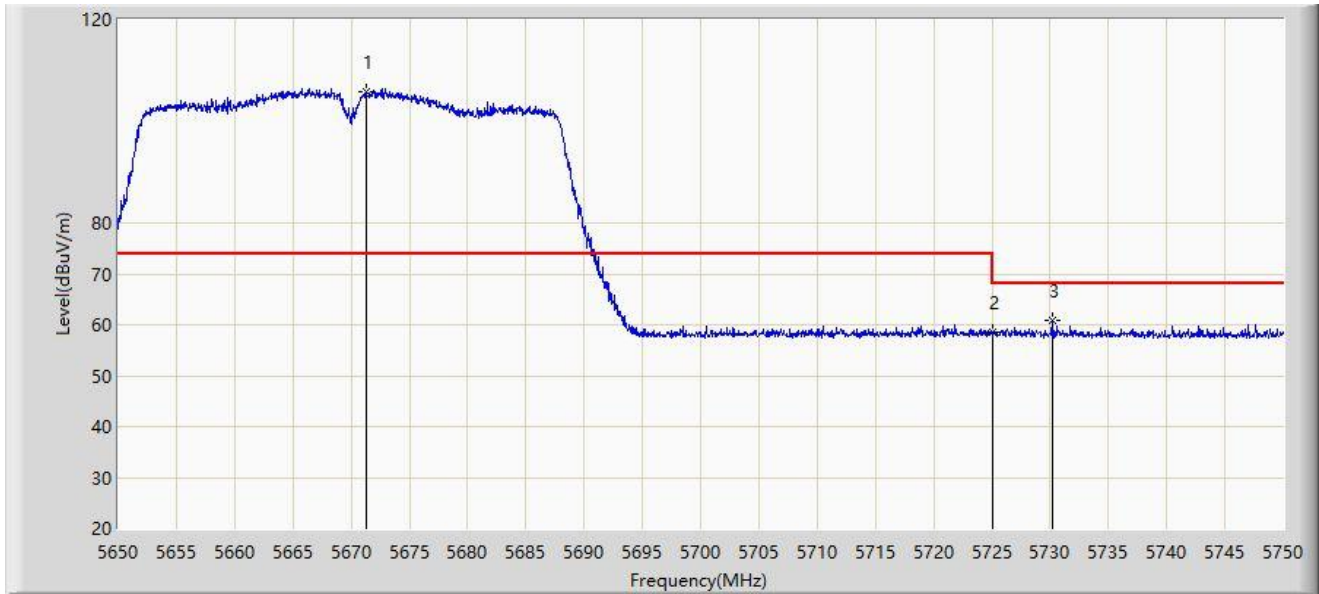


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5671.300	105.909	101.890	N/A	N/A	4.020	PK
2		5725.000	58.510	53.807	-9.690	68.200	4.703	PK
3	*	5730.150	60.765	56.123	-7.435	68.200	4.641	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

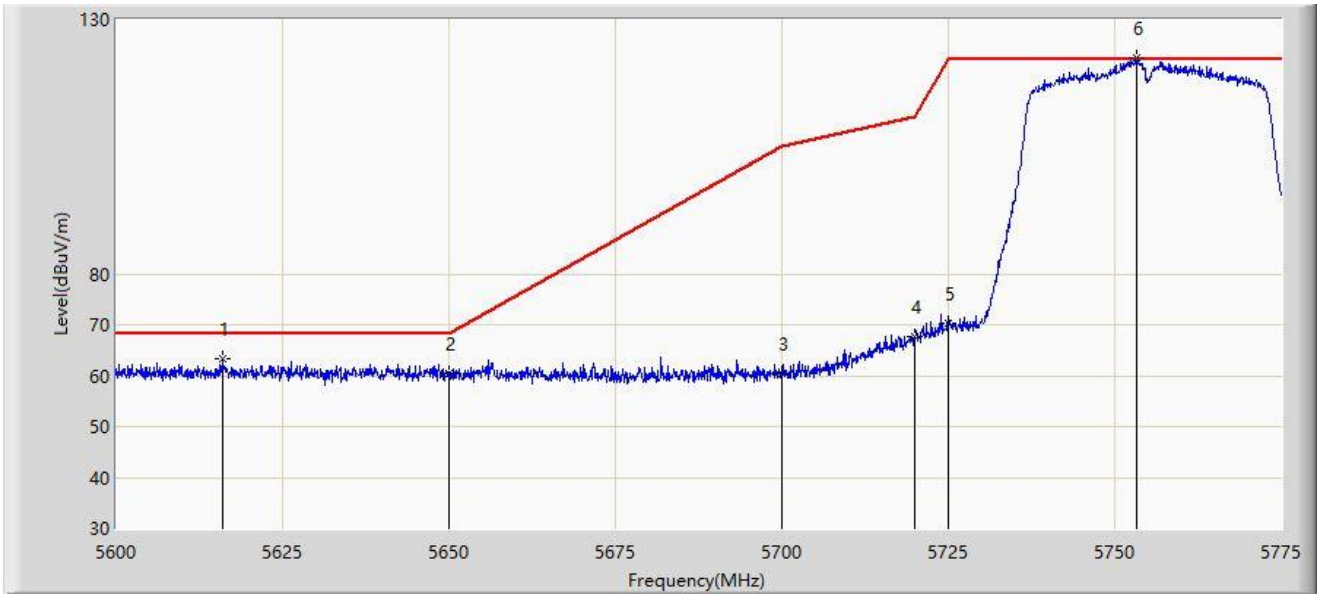


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5615.925	63.213	59.465	-4.987	68.200	3.747	PK
2		5650.000	60.561	56.438	-7.639	68.200	4.122	PK
3		5700.000	60.335	55.898	-44.865	105.200	4.437	PK
4		5720.000	67.727	63.063	-43.073	110.800	4.663	PK
5		5725.000	70.378	65.675	-51.822	122.200	4.703	PK
6		5753.212	122.557	118.039	N/A	N/A	4.518	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

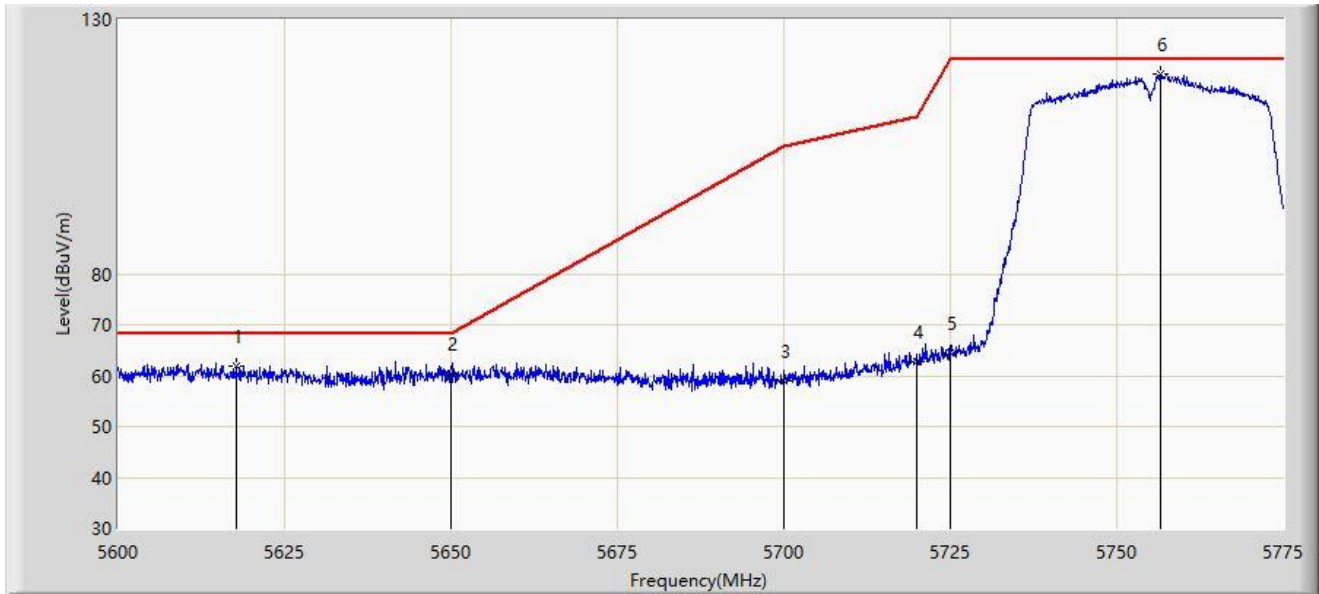


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5617.675	61.910	58.124	-6.290	68.200	3.786	PK
2		5650.000	60.382	56.259	-7.818	68.200	4.122	PK
3		5700.000	59.040	54.603	-46.160	105.200	4.437	PK
4		5720.000	62.832	58.168	-47.968	110.800	4.663	PK
5		5725.000	64.627	59.924	-57.573	122.200	4.703	PK
6		5756.538	119.228	114.670	N/A	N/A	4.558	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

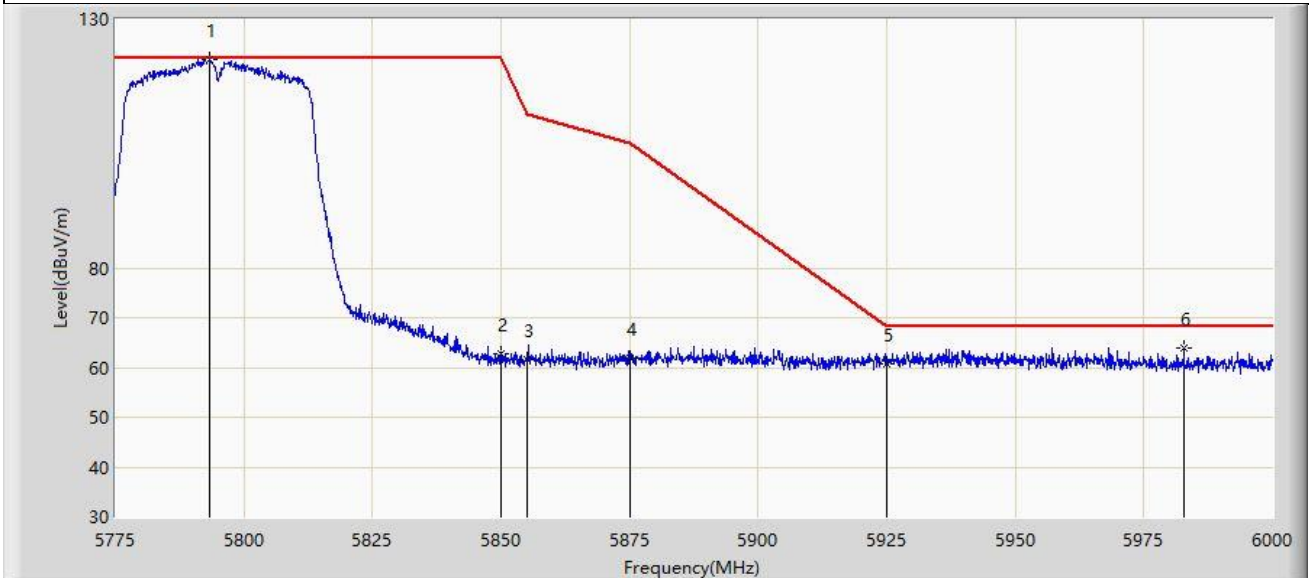


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5793.225	121.872	116.806	N/A	N/A	5.065	PK
2		5850.000	62.662	57.679	-59.538	122.200	4.984	PK
3		5855.000	61.695	56.657	-49.105	110.800	5.038	PK
4		5875.000	61.928	56.797	-43.272	105.200	5.131	PK
5		5925.000	60.722	55.487	-7.478	68.200	5.236	PK
6	*	5982.788	63.903	58.654	-4.297	68.200	5.248	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

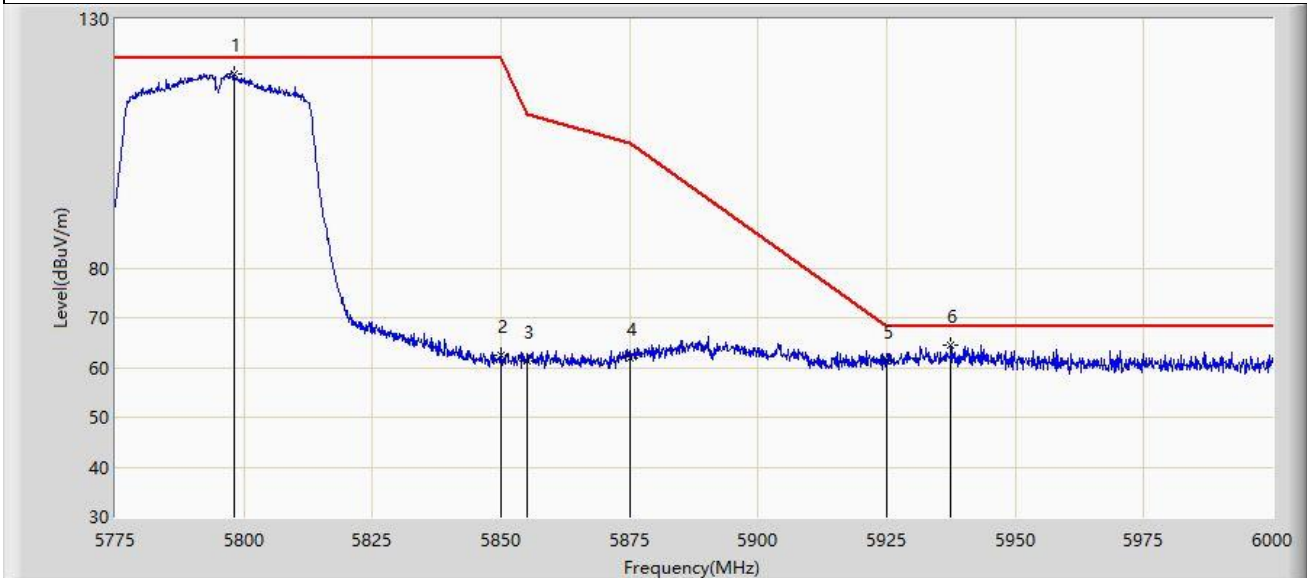


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5798.062	119.081	114.007	N/A	N/A	5.074	PK
2		5850.000	62.493	57.510	-59.707	122.200	4.984	PK
3		5855.000	61.211	56.173	-49.589	110.800	5.038	PK
4		5875.000	61.880	56.749	-43.320	105.200	5.131	PK
5		5925.000	61.319	56.084	-6.881	68.200	5.236	PK
6	*	5937.450	64.382	59.100	-3.818	68.200	5.282	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

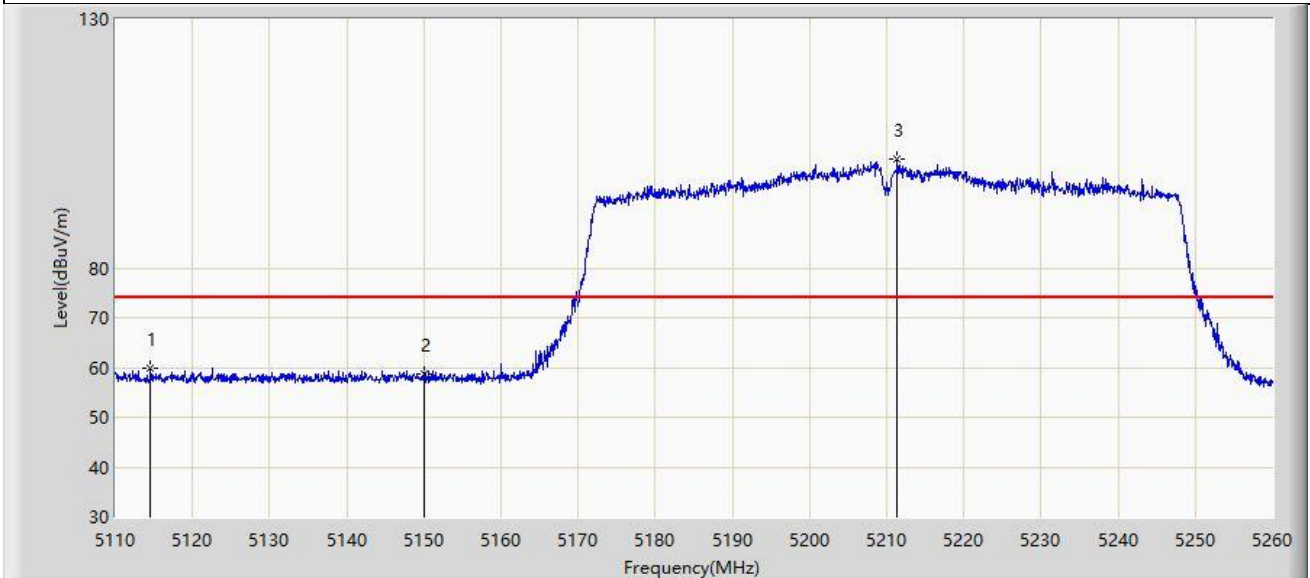


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5114.575	59.949	56.680	-14.051	74.000	3.269	PK
2		5150.000	58.630	55.148	-15.370	74.000	3.482	PK
3		5211.400	101.792	98.890	N/A	N/A	2.902	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

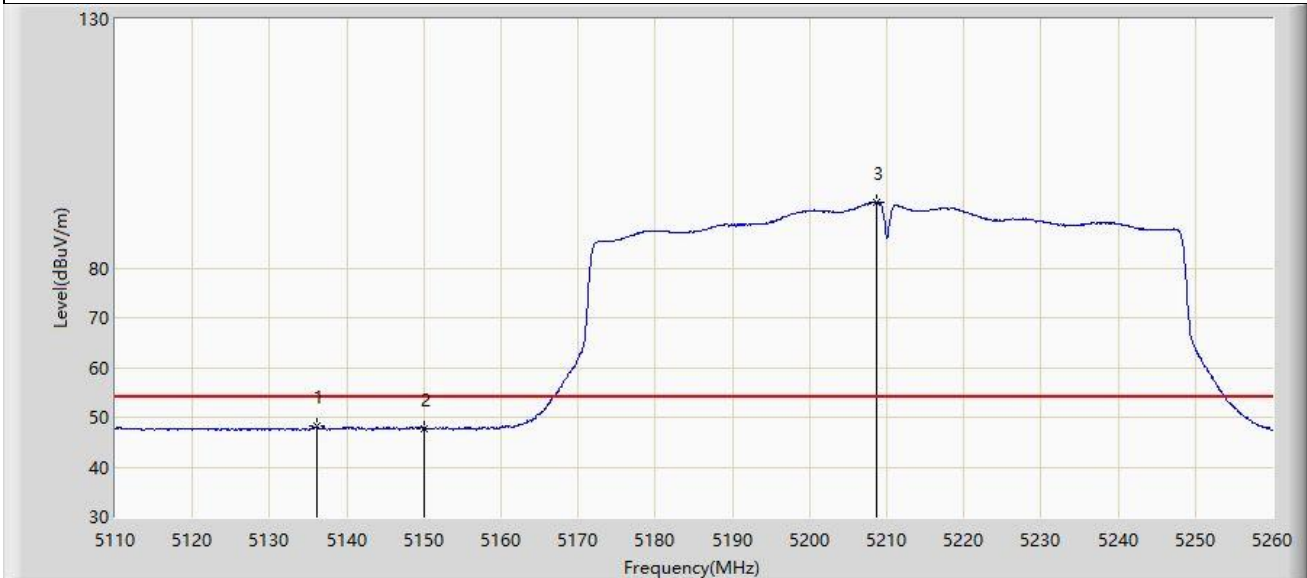


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5136.175	48.177	44.851	-5.823	54.000	3.326	AV
2		5150.000	47.755	44.273	-6.245	54.000	3.482	AV
3		5208.700	93.217	90.325	N/A	N/A	2.892	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

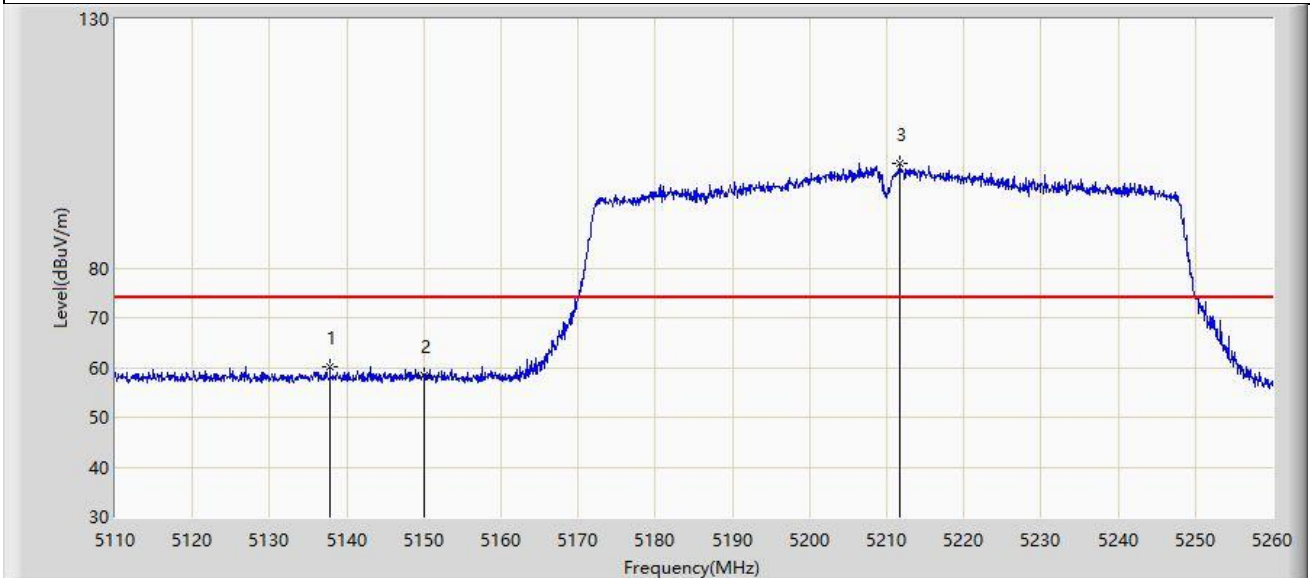


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5137.825	60.008	56.661	-13.992	74.000	3.347	PK
2		5150.000	58.403	54.921	-15.597	74.000	3.482	PK
3		5211.775	101.019	98.115	N/A	N/A	2.904	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

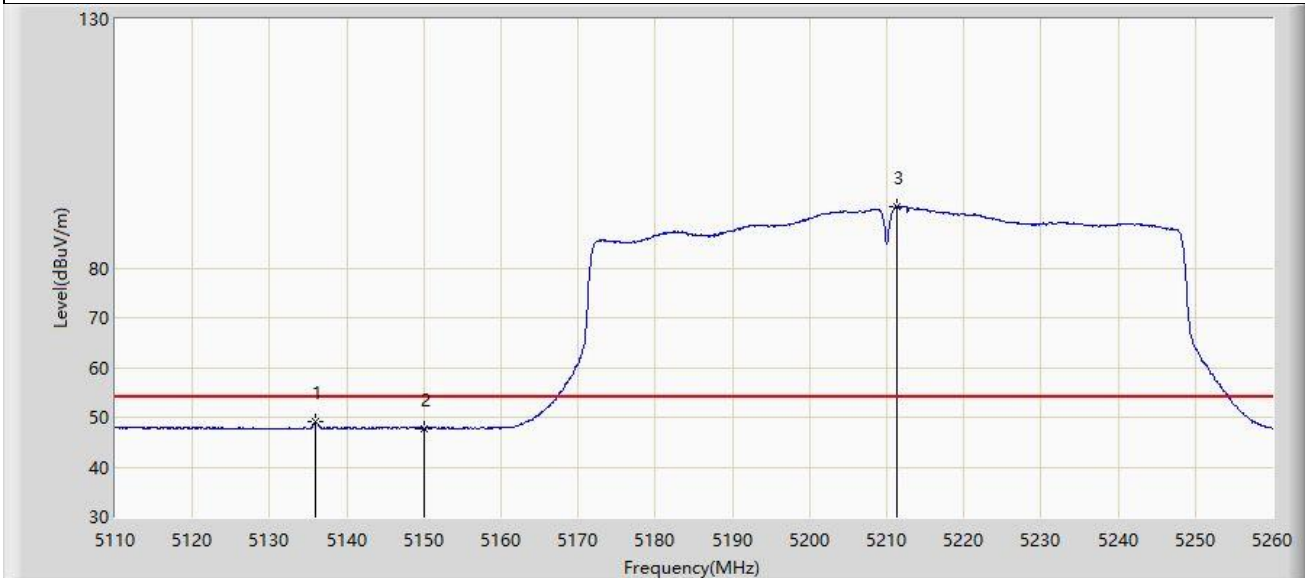


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5135.950	49.186	45.863	-4.814	54.000	3.323	AV
2		5150.000	47.763	44.281	-6.237	54.000	3.482	AV
3		5211.250	92.350	89.448	N/A	N/A	2.901	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

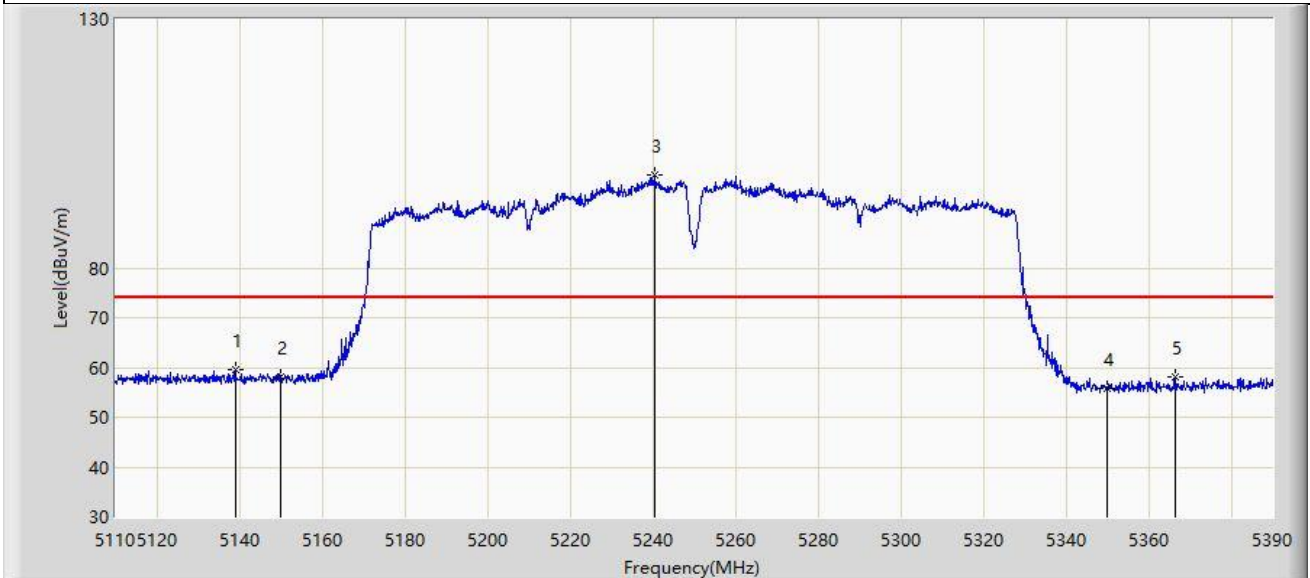


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5138.980	59.509	56.147	-14.491	74.000	3.361	PK
2		5150.000	58.203	54.721	-15.797	74.000	3.482	PK
3		5240.480	98.664	95.451	N/A	N/A	3.213	PK
4		5350.000	55.869	53.049	-18.131	74.000	2.820	PK
5		5366.340	58.005	55.155	-15.995	74.000	2.850	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

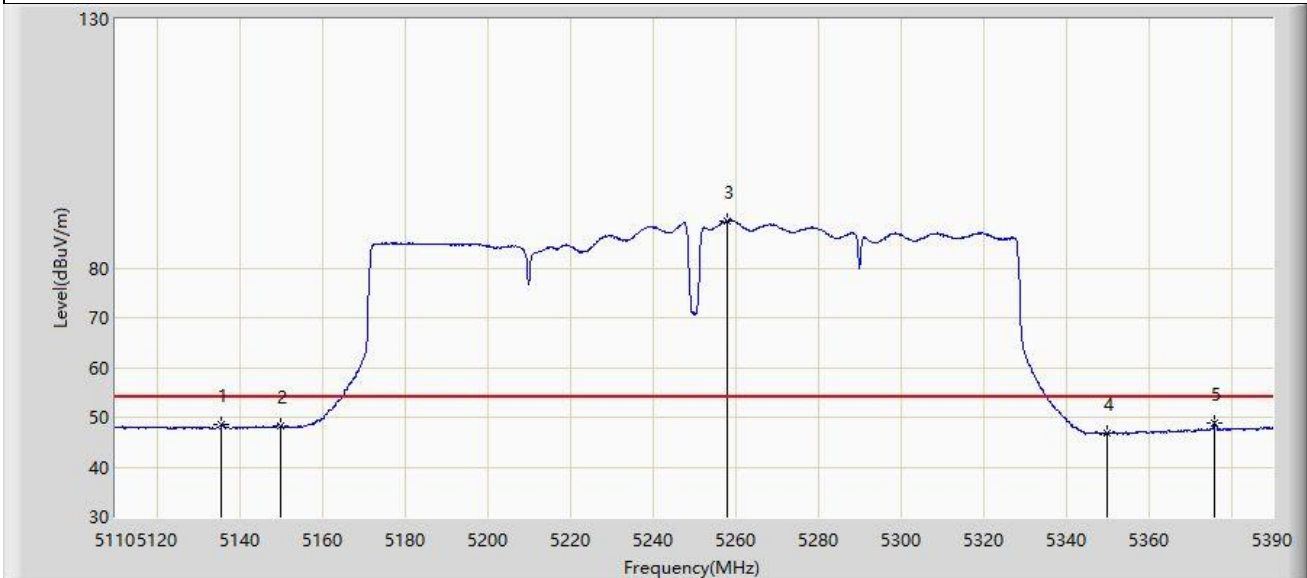


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5135.760	48.540	45.219	-5.460	54.000	3.322	AV
2		5150.000	48.194	44.712	-5.806	54.000	3.482	AV
3		5258.120	89.545	86.528	N/A	N/A	3.016	AV
4		5350.000	46.825	44.005	-7.175	54.000	2.820	AV
5	*	5375.860	48.793	45.799	-5.207	54.000	2.994	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

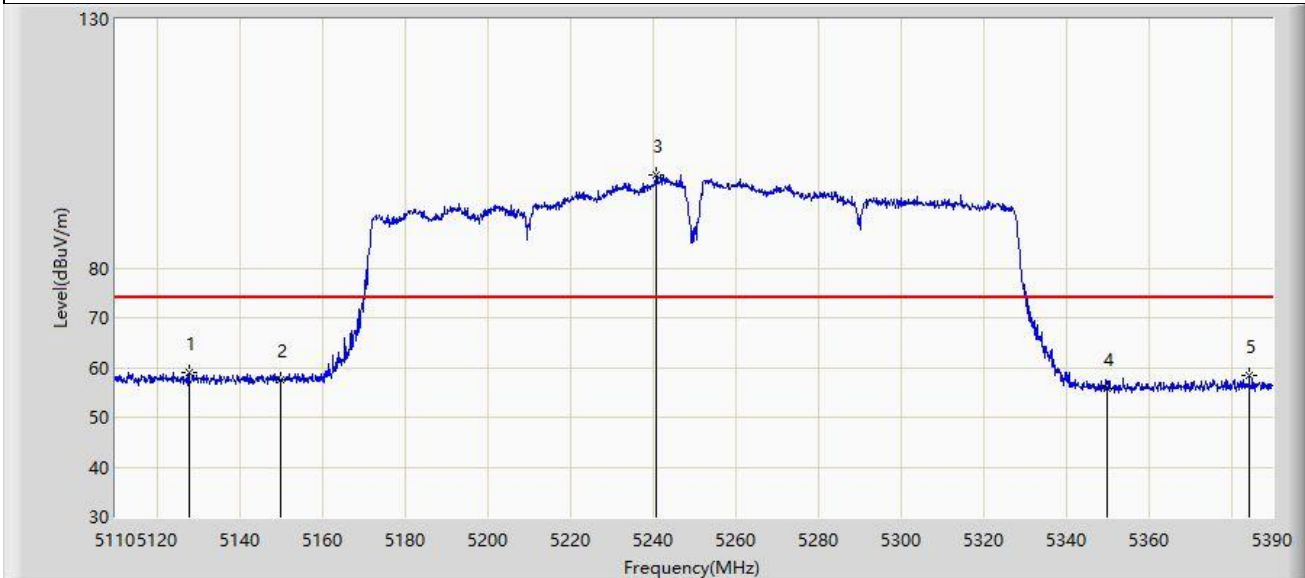


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5127.780	58.981	55.716	-15.019	74.000	3.265	PK
2		5150.000	57.454	53.972	-16.546	74.000	3.482	PK
3		5240.760	98.776	95.563	N/A	N/A	3.212	PK
4		5350.000	55.832	53.012	-18.168	74.000	2.820	PK
5		5384.400	58.505	55.344	-15.495	74.000	3.161	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

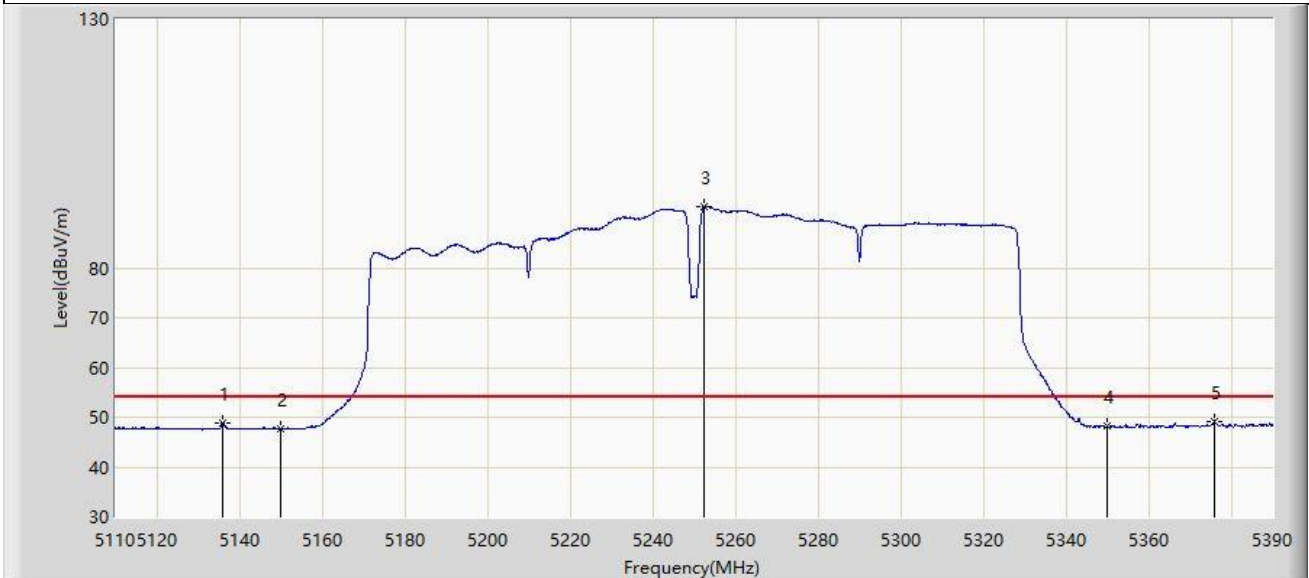


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5136.040	48.904	45.580	-5.096	54.000	3.324	AV
2		5150.000	47.654	44.172	-6.346	54.000	3.482	AV
3		5252.380	92.282	89.151	N/A	N/A	3.131	AV
4		5350.000	48.178	45.358	-5.822	54.000	2.820	AV
5	*	5375.860	49.160	46.166	-4.840	54.000	2.994	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

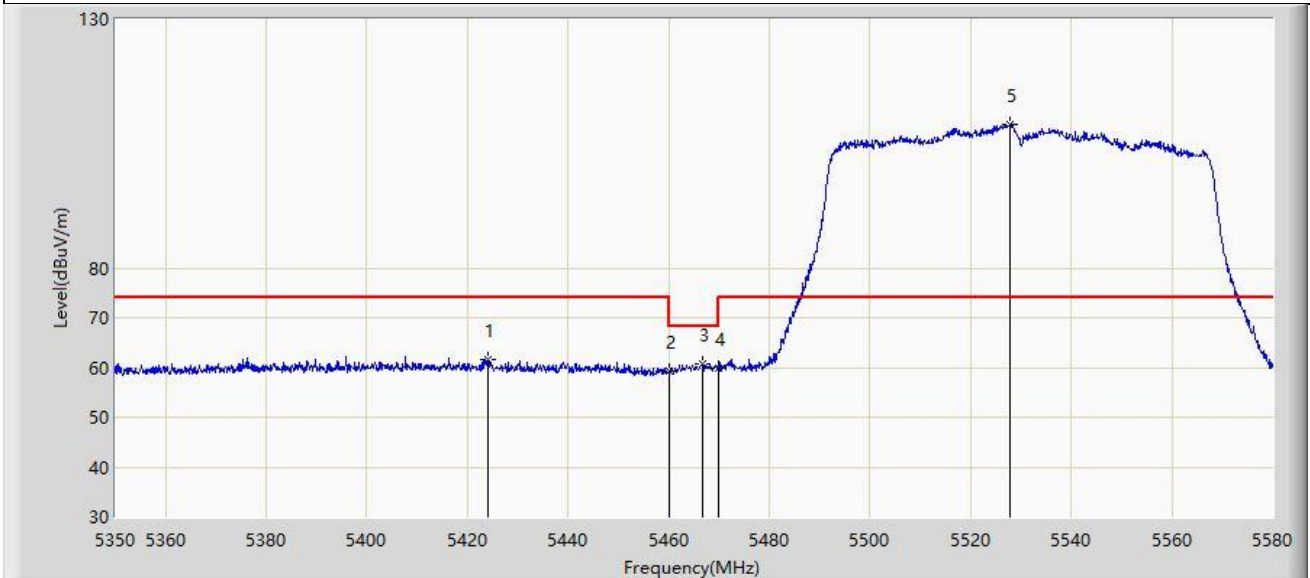


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5424.175	61.578	58.260	-12.422	74.000	3.318	PK
2		5460.000	59.397	56.248	-14.603	74.000	3.149	PK
3	*	5466.840	60.623	57.342	-7.577	68.200	3.281	PK
4		5470.000	59.834	56.492	-8.366	68.200	3.341	PK
5		5527.905	108.867	105.699	N/A	N/A	3.168	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

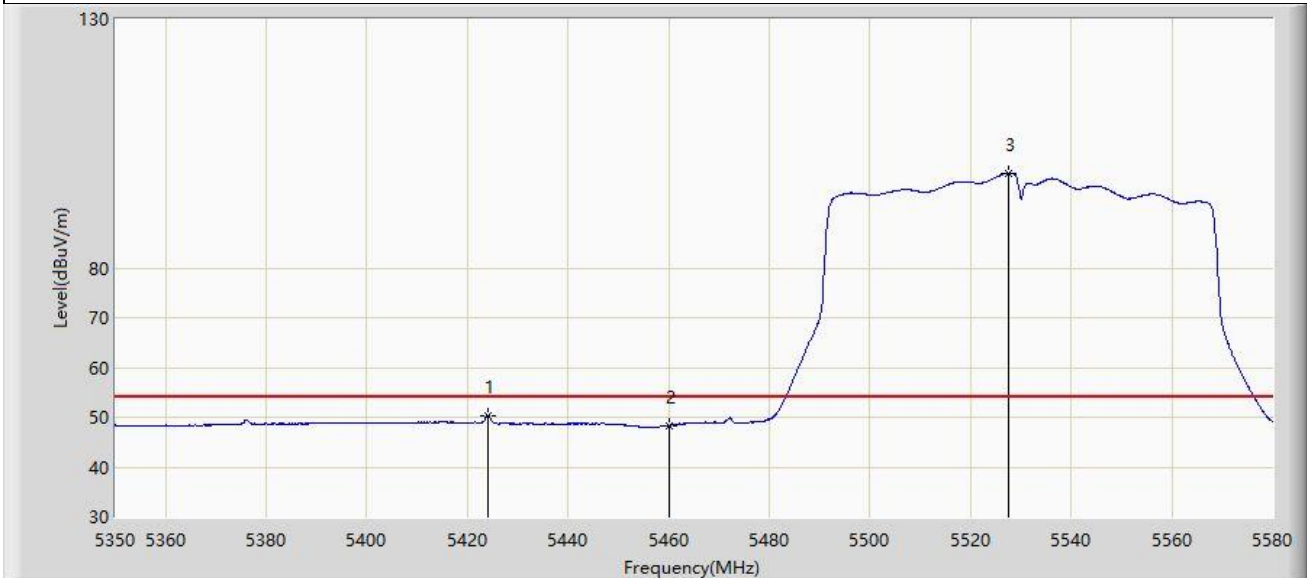


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5423.945	50.381	47.060	-3.619	54.000	3.321	AV
2		5460.000	48.359	45.210	-5.641	54.000	3.149	AV
3		5527.675	99.051	95.888	N/A	N/A	3.163	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

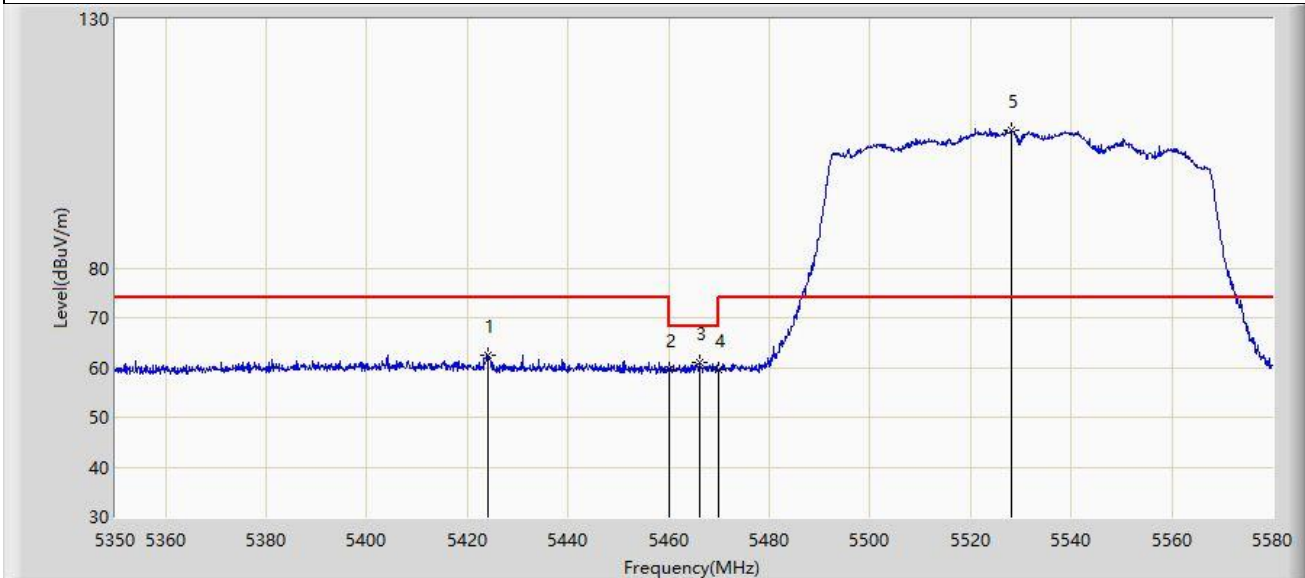


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5423.945	62.565	59.244	-11.435	74.000	3.321	PK
2		5460.000	59.514	56.365	-14.486	74.000	3.149	PK
3	*	5466.035	61.080	57.815	-7.120	68.200	3.266	PK
4		5470.000	59.494	56.152	-8.706	68.200	3.341	PK
5		5528.135	107.817	104.644	N/A	N/A	3.173	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

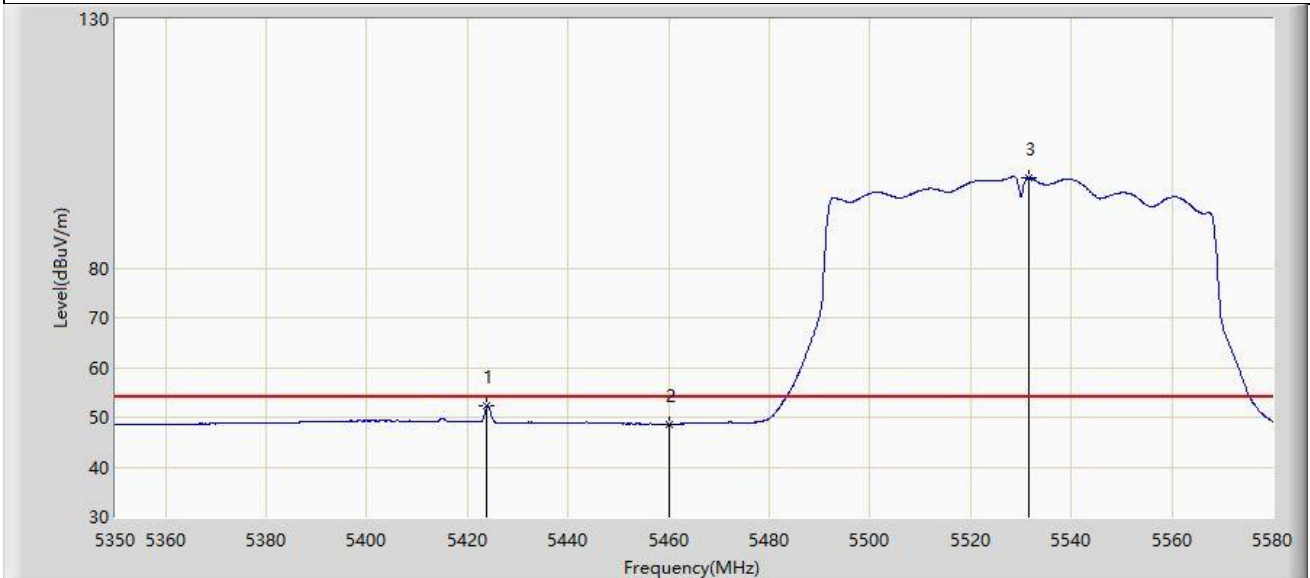


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5423.830	52.231	48.909	-1.769	54.000	3.322	AV
2		5460.000	48.562	45.413	-5.438	54.000	3.149	AV
3		5531.470	98.168	94.947	N/A	N/A	3.222	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

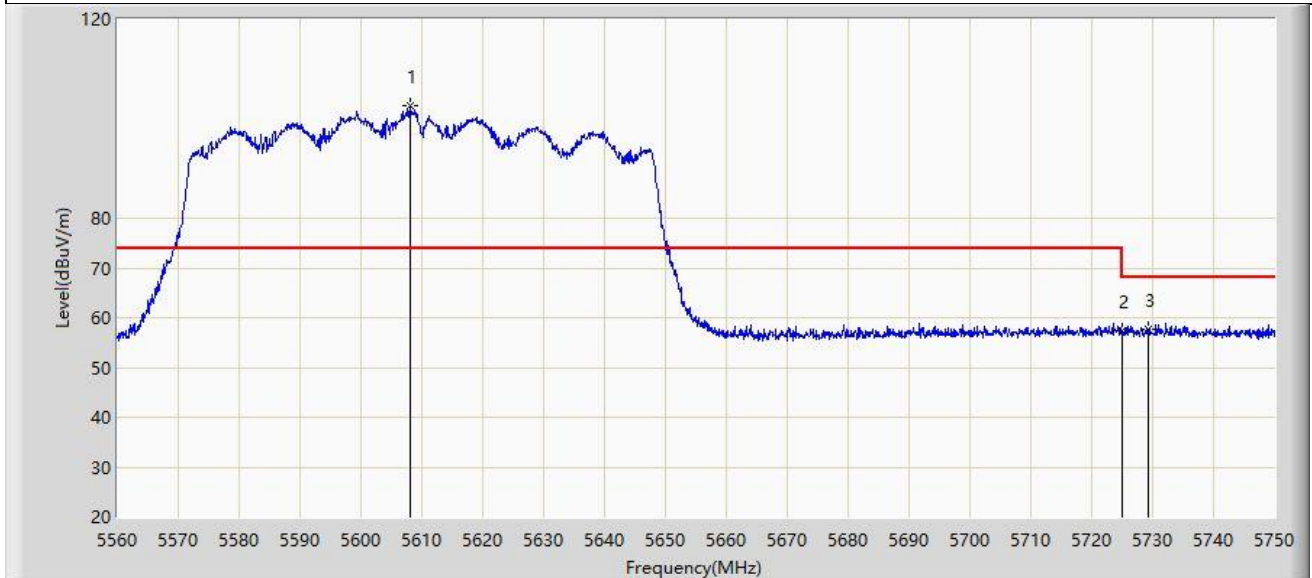

No	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	5608.070	102.612	99.037	N/A	N/A	N/A	PK
2	5725.000	57.336	52.633	-10.864	68.200	4.703	PK
3	*	57.741	53.082	-10.459	68.200	4.658	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).ote 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m) (dB/m).

Note 3: Factor (dB/m) (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

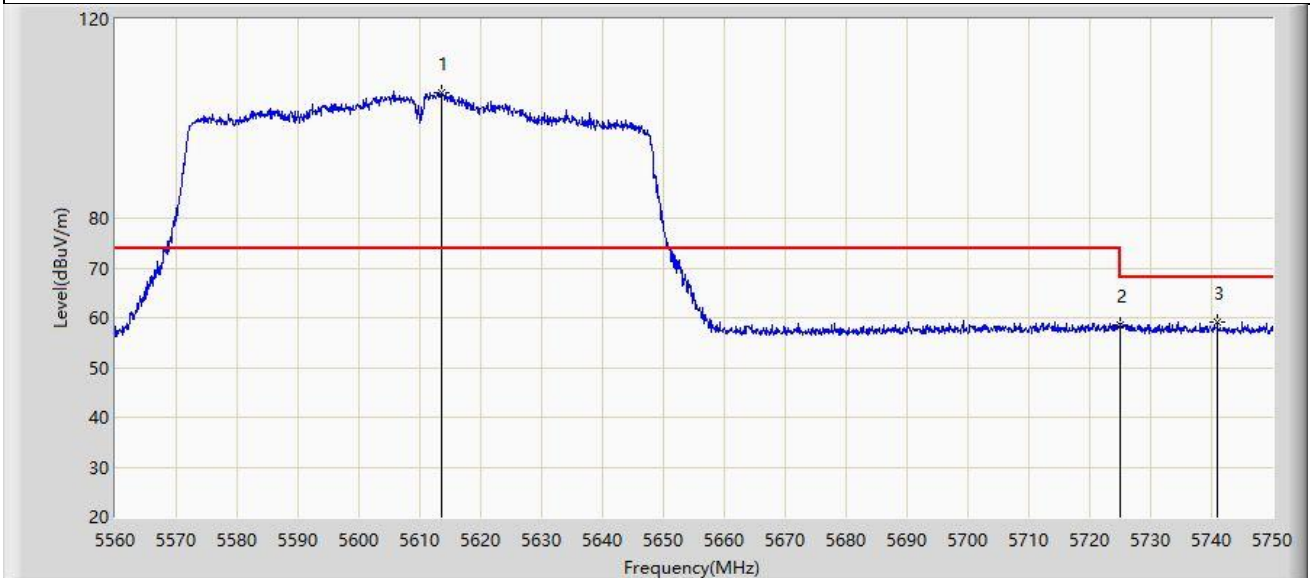

No	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	5613.580	105.261	101.565	N/A	N/A	N/A	PK
2	5725.000	58.642	53.939	-9.558	68.200	4.703	PK
3	*	59.100	54.650	-9.100	68.200	4.450	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).ote 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m) (dB/m).

Note 3: Factor (dB/m) (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

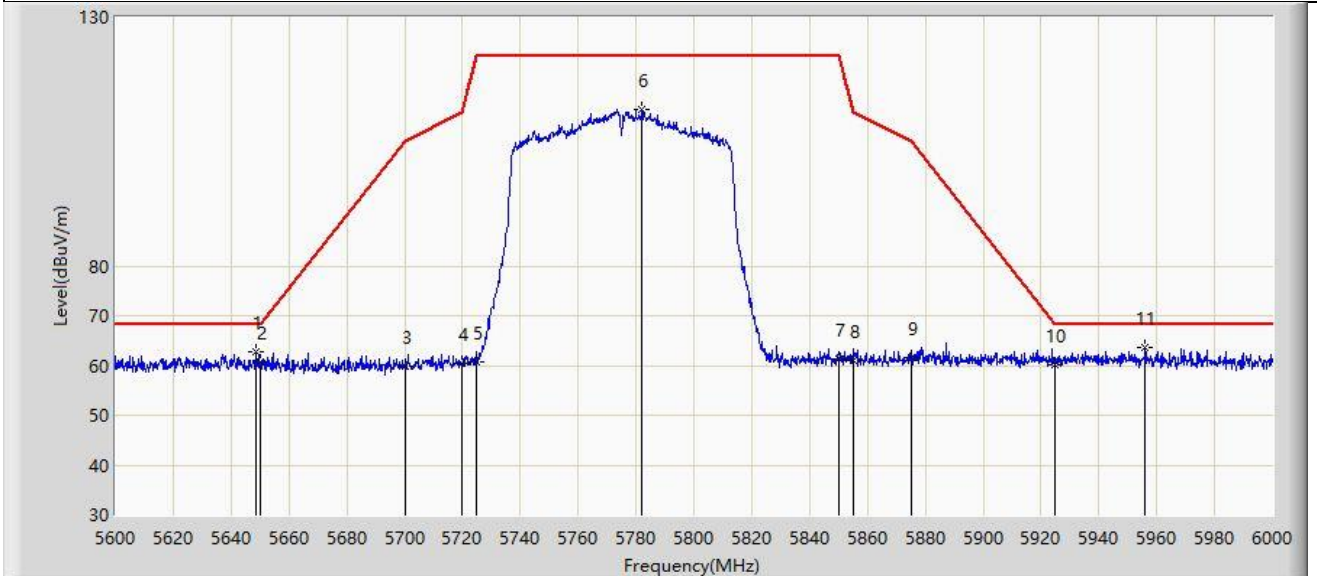


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5648.400	62.800	58.670	-5.400	68.200	4.130	PK
2		5650.000	60.581	56.458	-7.619	68.200	4.122	PK
3		5700.000	59.824	55.387	-45.376	105.200	4.437	PK
4		5720.000	60.566	55.902	-50.234	110.800	4.663	PK
5		5725.000	60.605	55.902	-61.595	122.200	4.703	PK
6		5782.000	111.322	106.389	N/A	N/A	4.933	PK
7		5850.000	61.381	56.398	-60.819	122.200	4.984	PK
8		5855.000	61.149	56.111	-49.651	110.800	5.038	PK
9		5875.000	61.458	56.327	-43.742	105.200	5.131	PK
10		5925.000	60.195	54.960	-8.005	68.200	5.236	PK
11	*	5956.000	63.654	58.275	-4.546	68.200	5.379	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

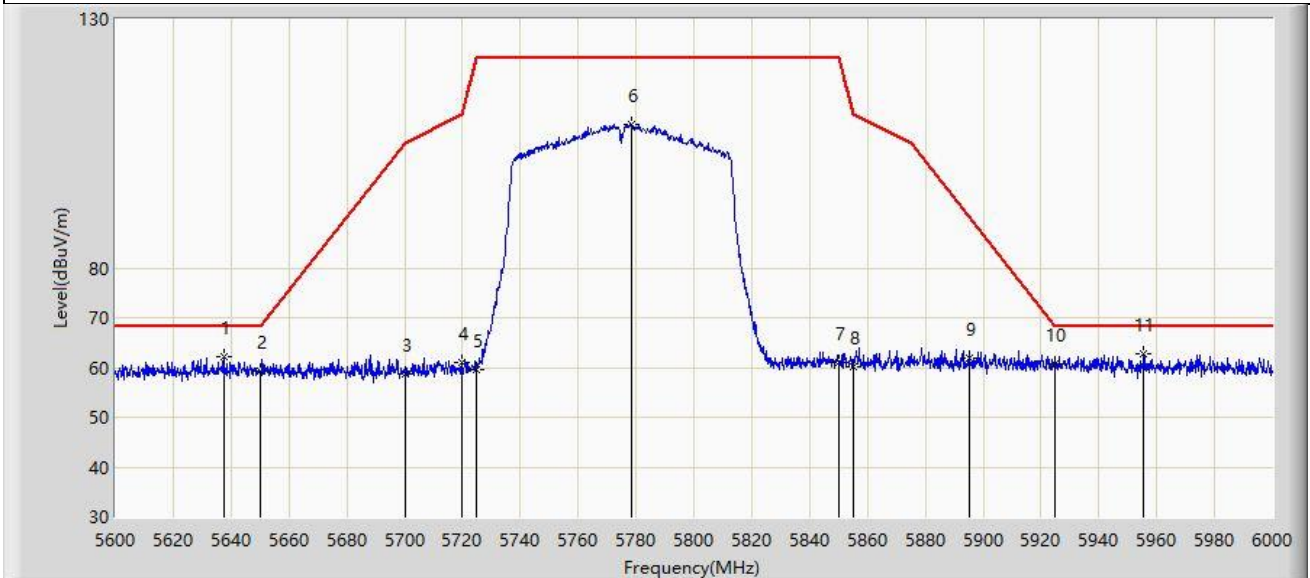


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5637.400	62.029	57.910	-6.171	68.200	4.119	PK
2		5650.000	59.334	55.211	-8.866	68.200	4.122	PK
3		5700.000	58.804	54.367	-46.396	105.200	4.437	PK
4		5720.000	60.963	56.299	-49.837	110.800	4.663	PK
5		5725.000	59.630	54.927	-62.570	122.200	4.703	PK
6		5778.400	108.897	104.001	N/A	N/A	4.896	PK
7		5850.000	60.909	55.926	-61.291	122.200	4.984	PK
8		5855.000	60.228	55.190	-50.572	110.800	5.038	PK
9		5895.000	61.748	56.633	-28.652	90.400	5.116	PK
10		5925.000	60.648	55.413	-7.552	68.200	5.236	PK
11	*	5955.600	62.717	57.340	-5.483	68.200	5.377	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23 ANT3	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

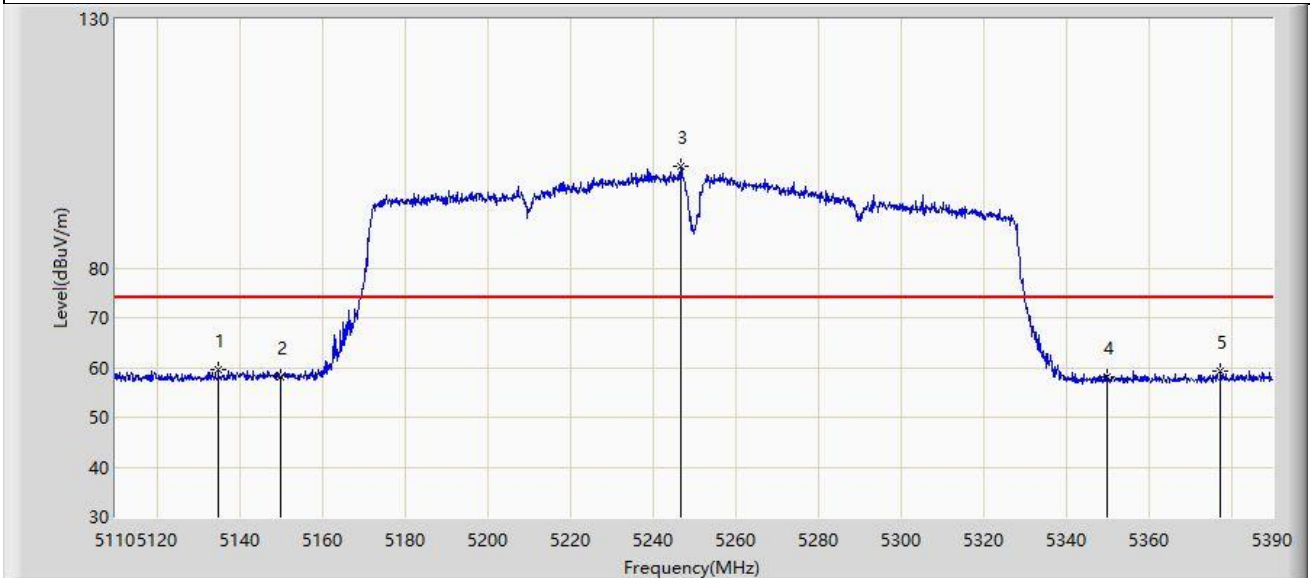


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5134.920	59.679	56.369	-14.321	74.000	3.310	PK
2		5150.000	58.211	54.729	-15.789	74.000	3.482	PK
3		5246.780	100.321	97.130	N/A	N/A	3.191	PK
4		5350.000	58.151	55.331	-15.849	74.000	2.820	PK
5		5377.540	59.162	56.135	-14.838	74.000	3.027	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

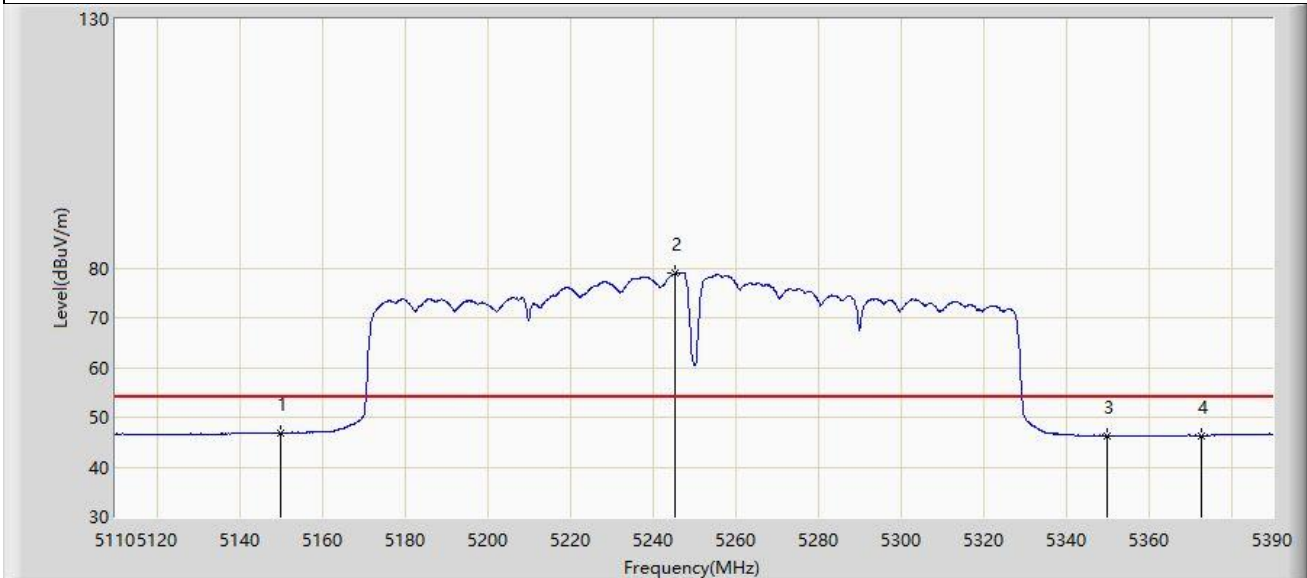


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	46.894	43.412	-7.106	54.000	3.482	AV
2		5245.520	78.970	75.774	N/A	N/A	3.196	AV
3		5350.000	46.331	43.511	-7.669	54.000	2.820	AV
4		5372.920	46.333	43.396	-7.667	54.000	2.936	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

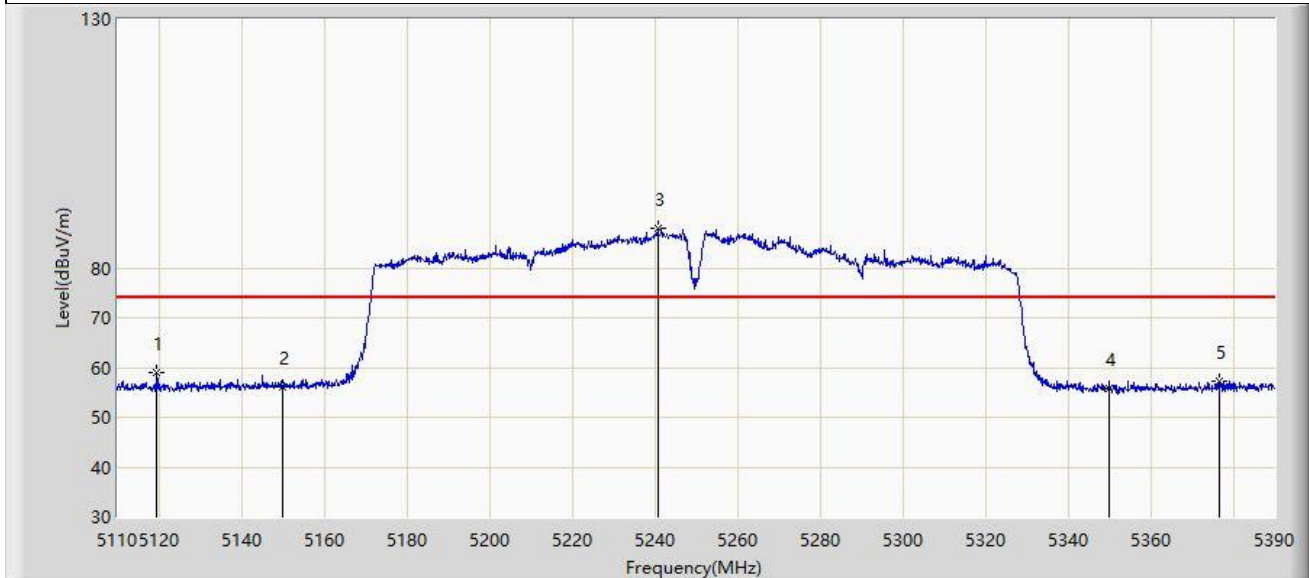


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5119.520	59.099	55.830	-14.901	74.000	3.269	PK
2		5150.000	56.157	52.675	-17.843	74.000	3.482	PK
3		5240.900	87.885	84.673	N/A	N/A	3.213	PK
4		5350.000	55.829	53.009	-18.171	74.000	2.820	PK
5		5376.700	57.208	54.197	-16.792	74.000	3.010	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

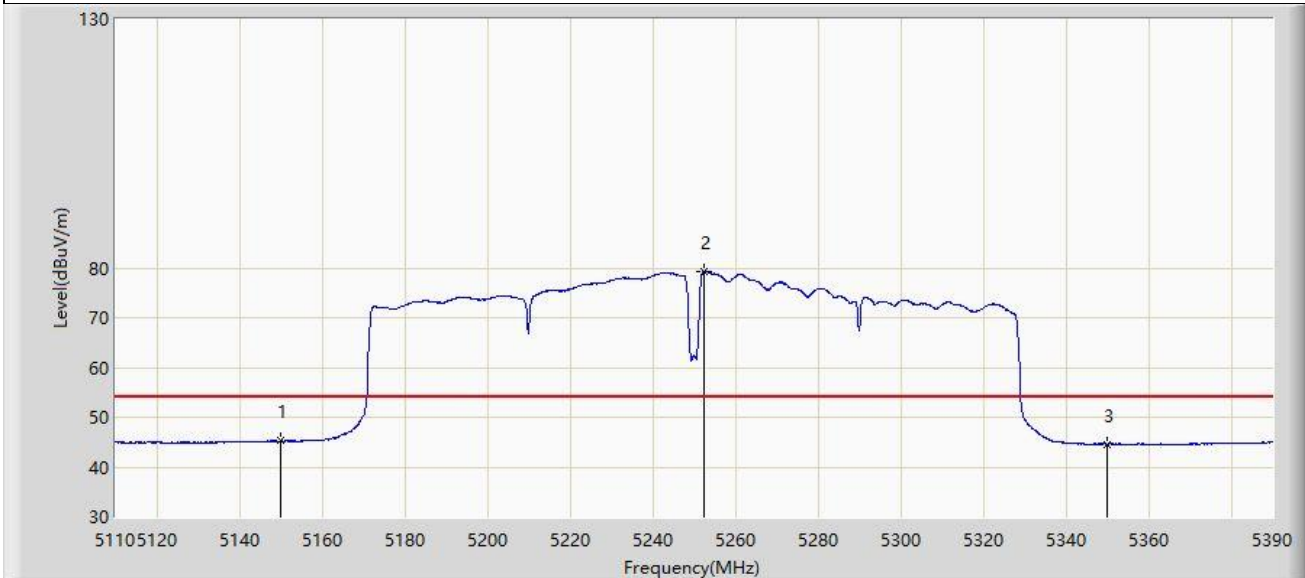


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	45.326	41.844	-8.674	54.000	3.482	AV
2		5252.520	79.258	76.129	N/A	N/A	3.128	AV
3		5350.000	44.616	41.796	-9.384	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

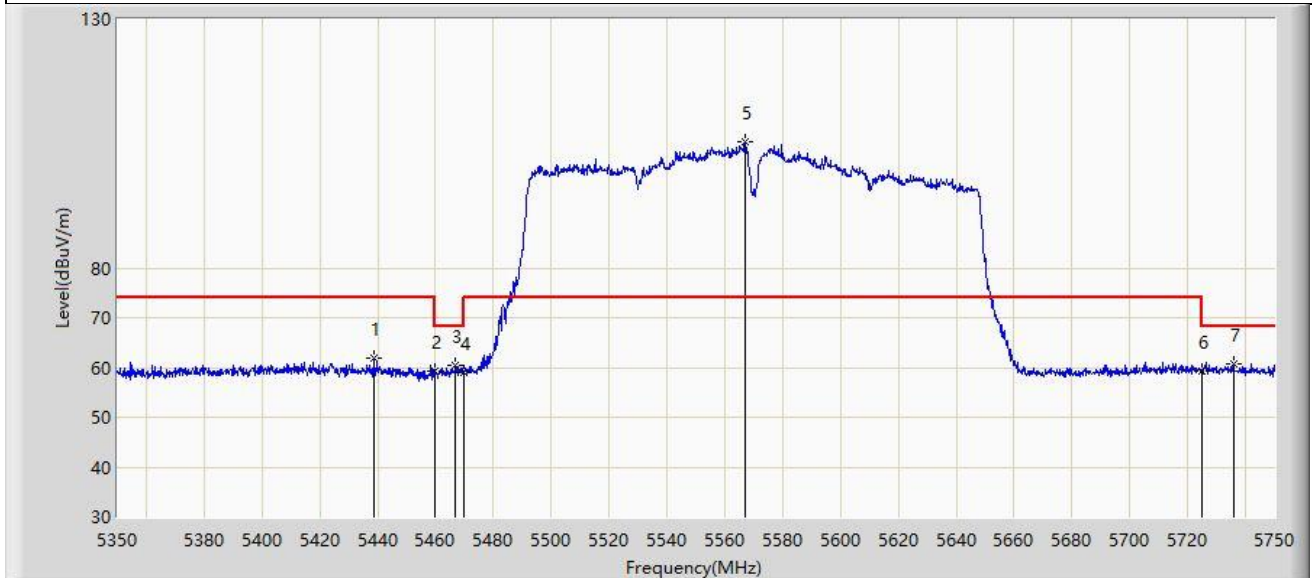


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5438.600	61.881	58.720	-12.119	74.000	3.161	PK
2		5460.000	59.142	55.993	-14.858	74.000	3.149	PK
3		5467.000	60.469	57.185	-7.731	68.200	3.284	PK
4		5470.000	58.943	55.601	-9.257	68.200	3.341	PK
5		5567.000	105.345	101.910	N/A	N/A	3.436	PK
6		5725.000	59.259	54.556	-8.941	68.200	4.703	PK
7	*	5735.800	60.698	56.156	-7.502	68.200	4.542	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

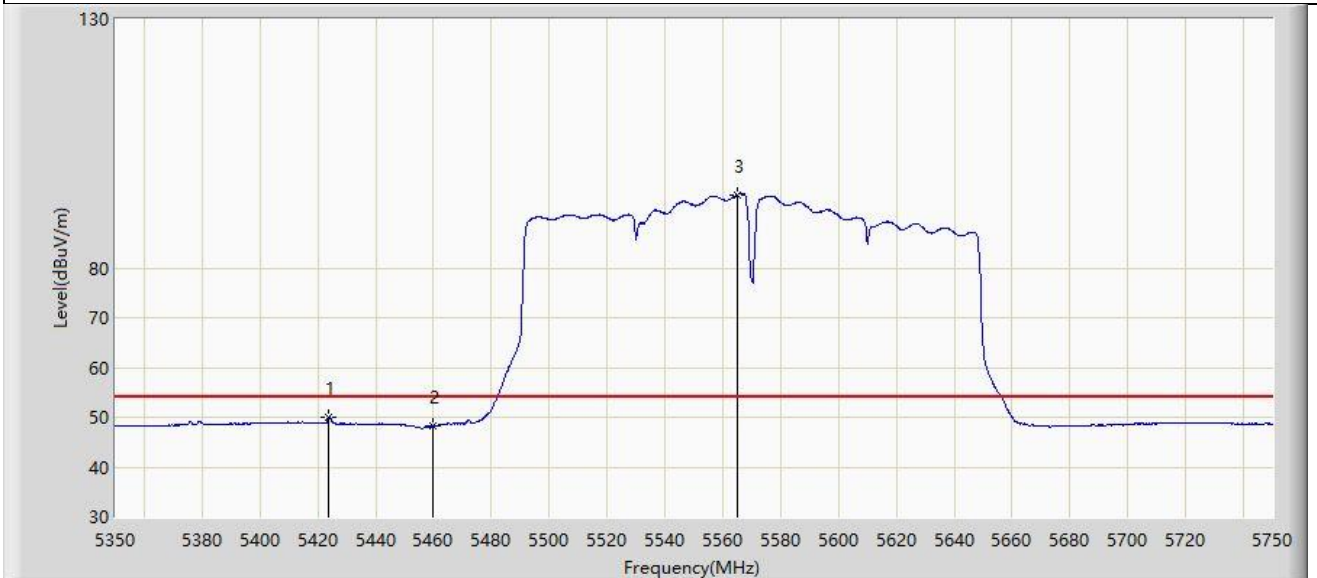


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5423.800	50.112	46.789	-3.888	54.000	3.323	AV
2		5460.000	48.198	45.049	-5.802	54.000	3.149	AV
3		5565.200	94.753	91.319	N/A	N/A	3.434	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

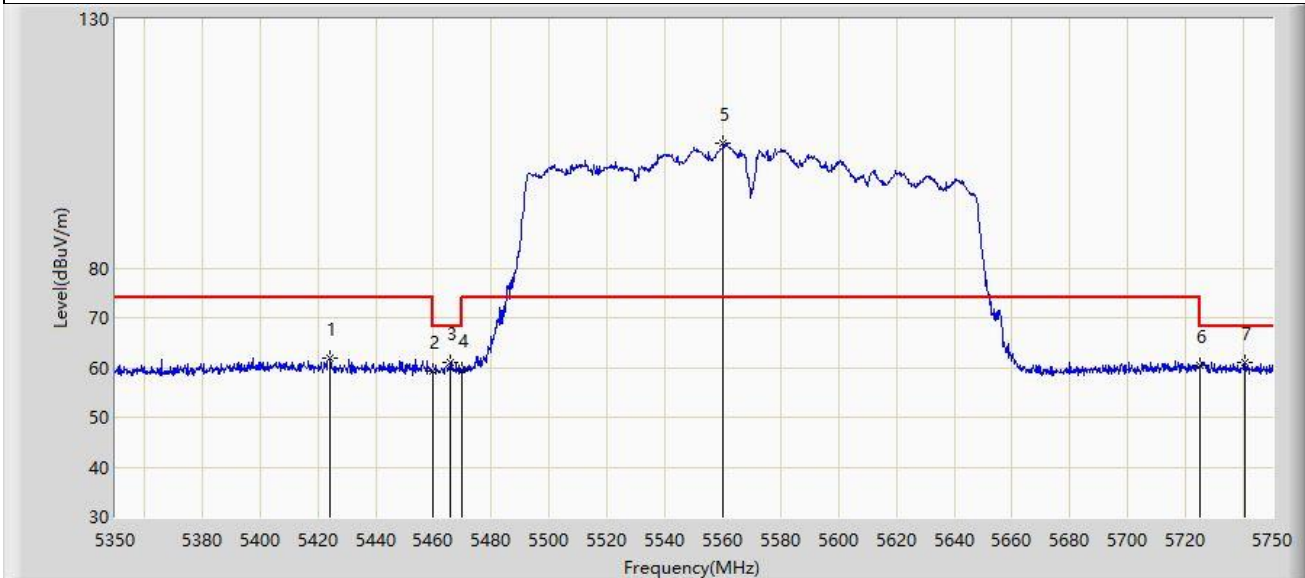


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5424.200	61.886	58.568	-12.114	74.000	3.318	PK
2		5460.000	59.171	56.022	-14.829	74.000	3.149	PK
3		5466.000	60.902	57.637	-7.298	68.200	3.265	PK
4		5470.000	59.440	56.098	-8.760	68.200	3.341	PK
5		5560.000	105.007	101.542	N/A	N/A	3.465	PK
6		5725.000	60.494	55.791	-7.706	68.200	4.703	PK
7	*	5740.400	61.104	56.644	-7.096	68.200	4.461	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

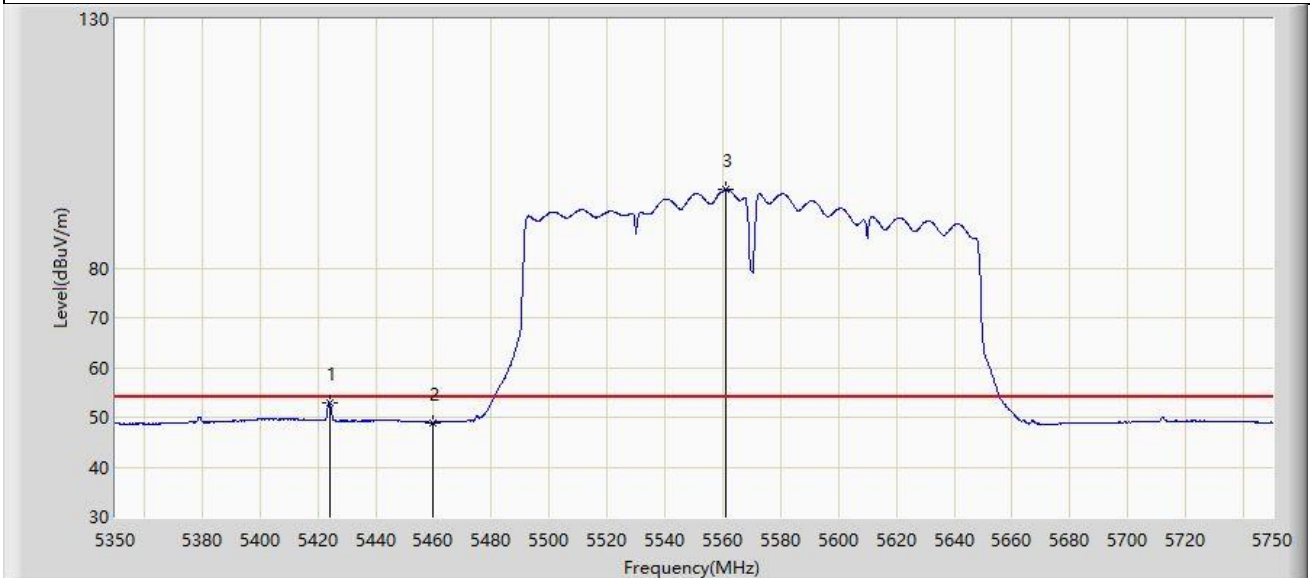


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5424.000	52.885	49.565	-1.115	54.000	3.321	AV
2		5460.000	48.945	45.796	-5.055	54.000	3.149	AV
3		5560.800	95.713	92.253	N/A	N/A	3.460	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

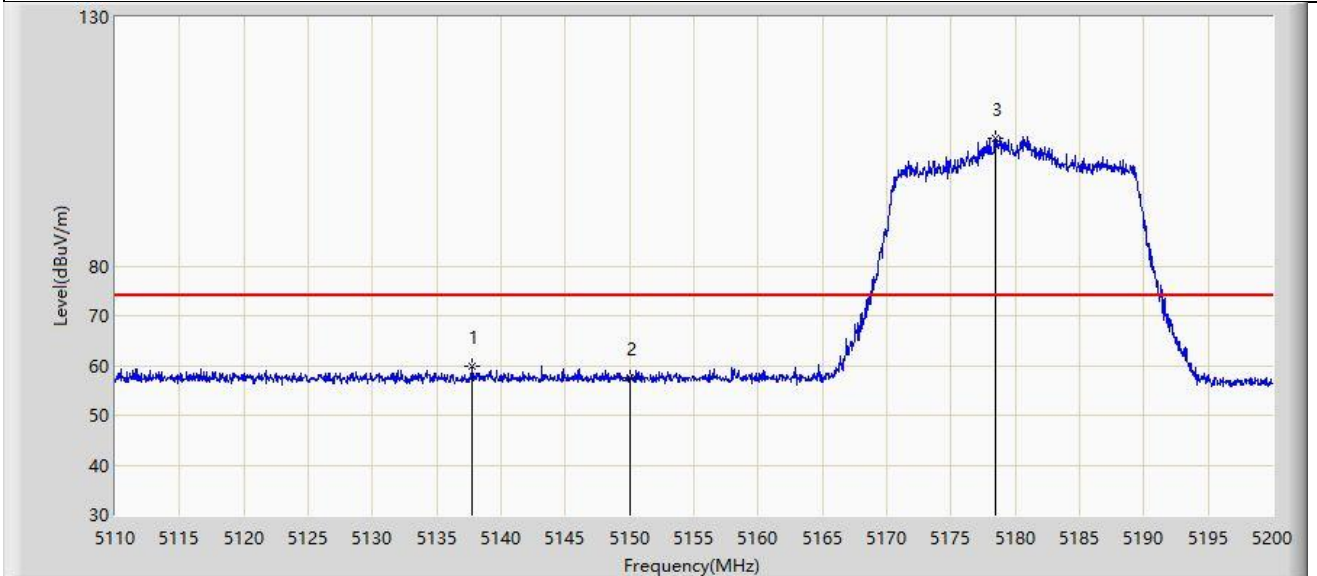


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5137.765	59.860	56.514	-14.140	74.000	3.346	PK
2		5150.000	57.641	54.159	-16.359	74.000	3.482	PK
3		5178.445	105.789	102.488	N/A	N/A	3.300	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

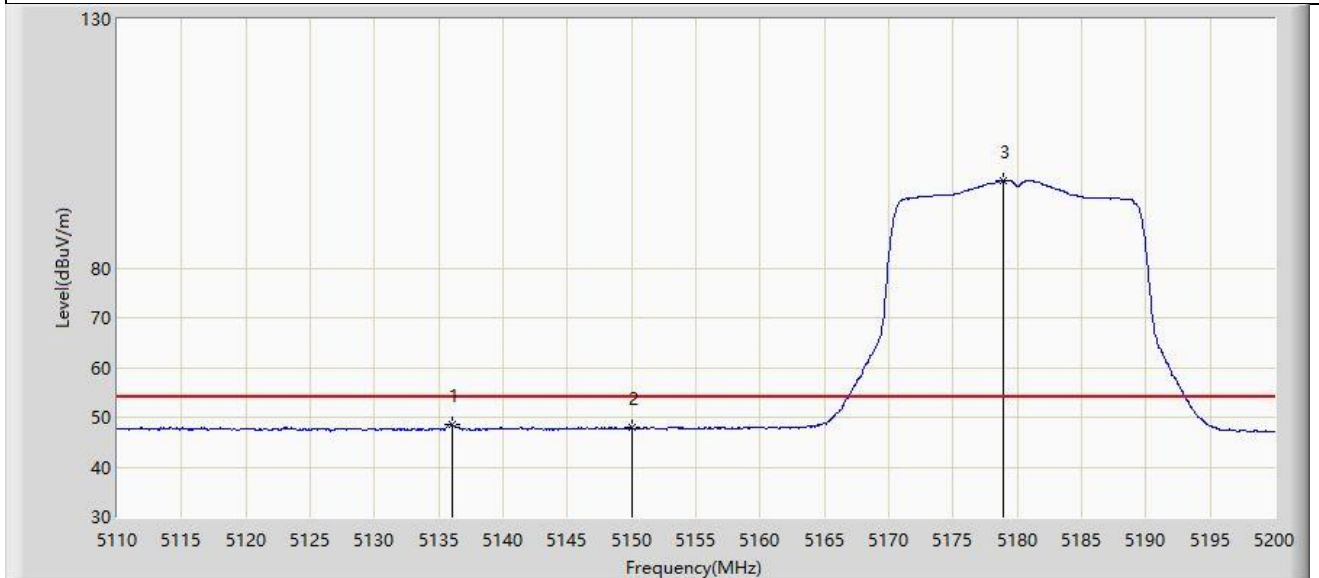


No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1	*	5136.010	48.519	45.195	-5.481	54.000	3.324	AV
2		5150.000	47.869	44.387	-6.131	54.000	3.482	AV
3		5178.940	97.600	94.309	N/A	N/A	3.291	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

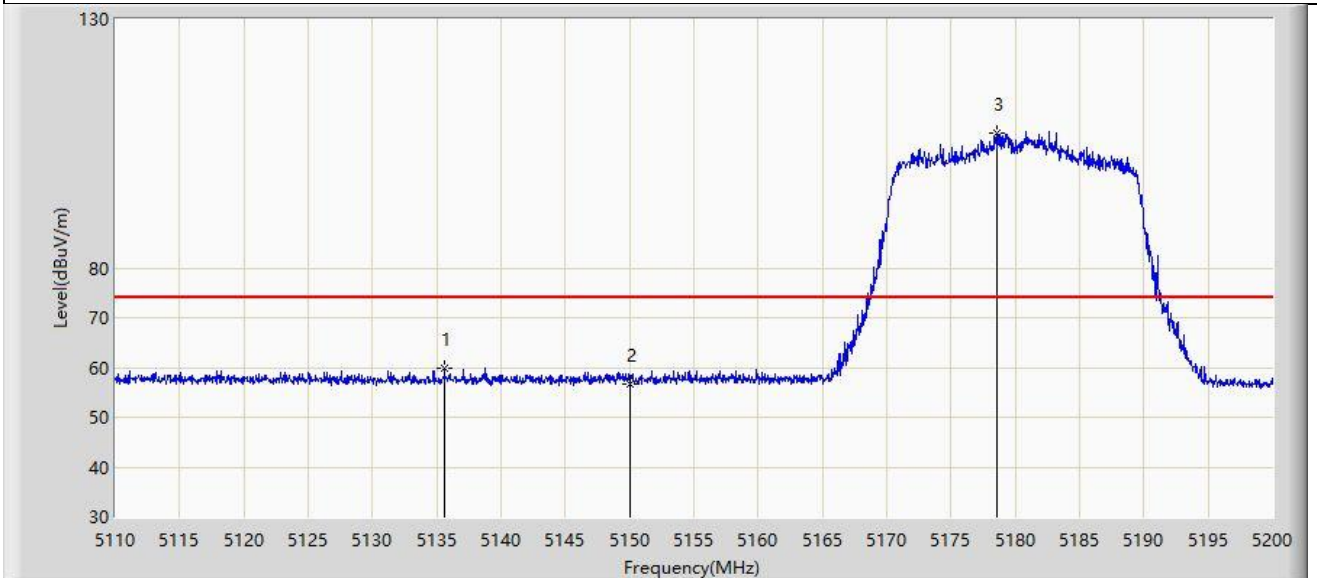


No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1	*	5135.605	59.770	56.451	-14.230	74.000	3.319	PK
2		5150.000	56.682	53.200	-17.318	74.000	3.482	PK
3		5178.625	107.219	103.922	N/A	N/A	3.298	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

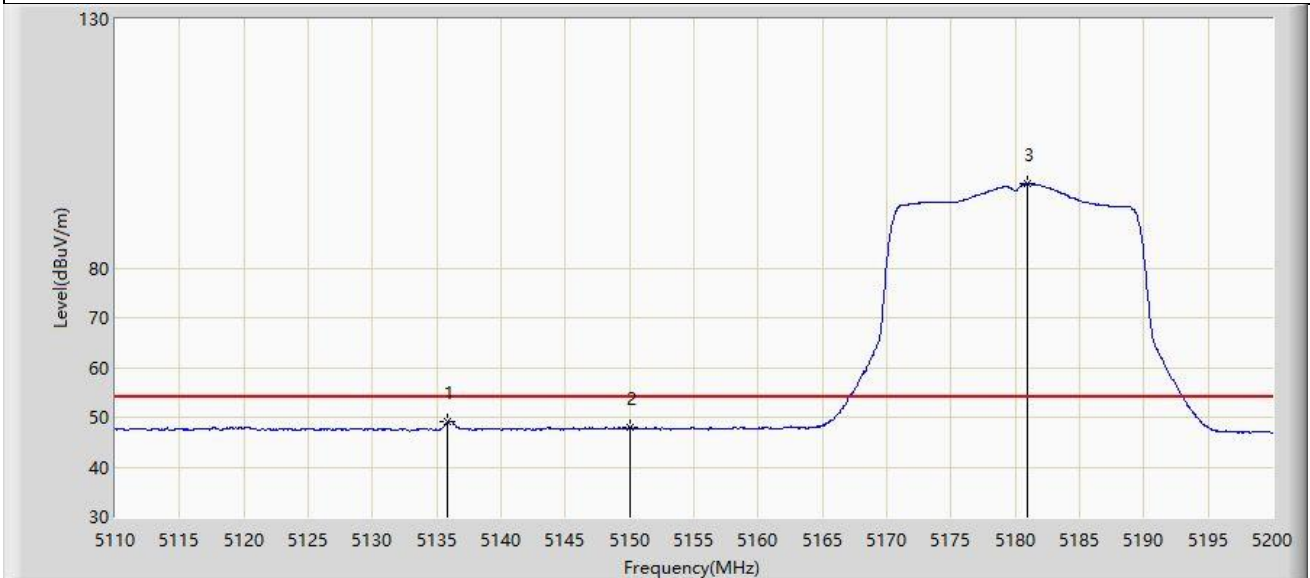


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5135.830	49.142	45.820	-4.858	54.000	3.322	AV
2		5150.000	47.908	44.426	-6.092	54.000	3.482	AV
3		5180.920	96.979	93.728	N/A	N/A	3.252	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

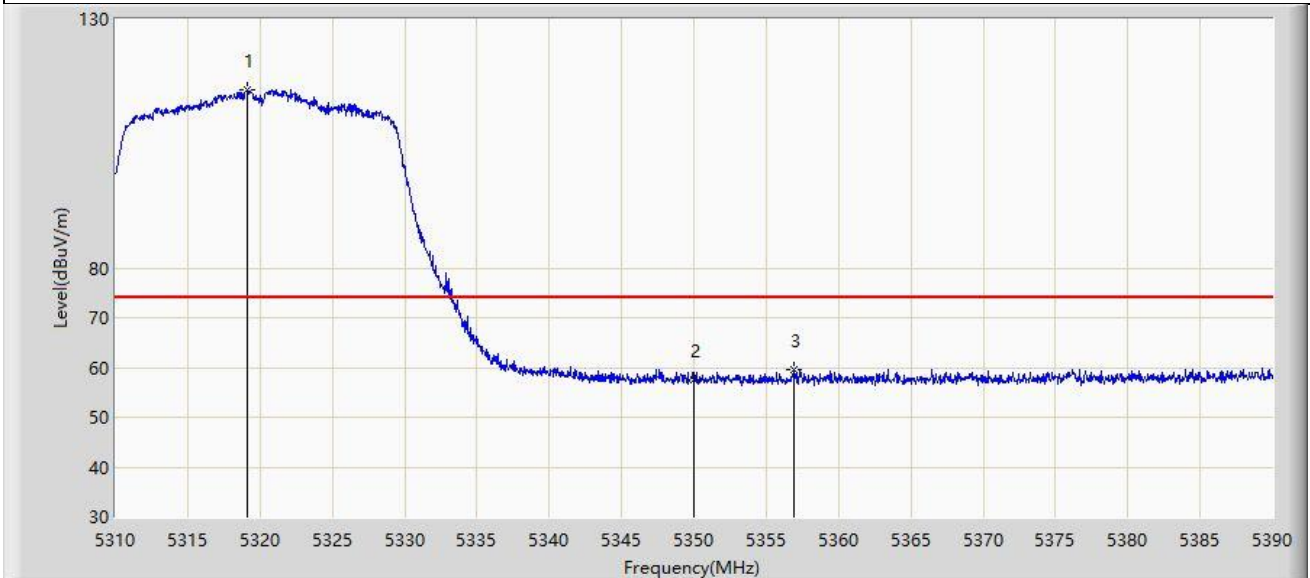


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5319.080	115.767	112.758	N/A	N/A	3.009	PK
2		5350.000	57.582	54.762	-16.418	74.000	2.820	PK
3	*	5356.960	59.561	56.753	-14.439	74.000	2.808	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

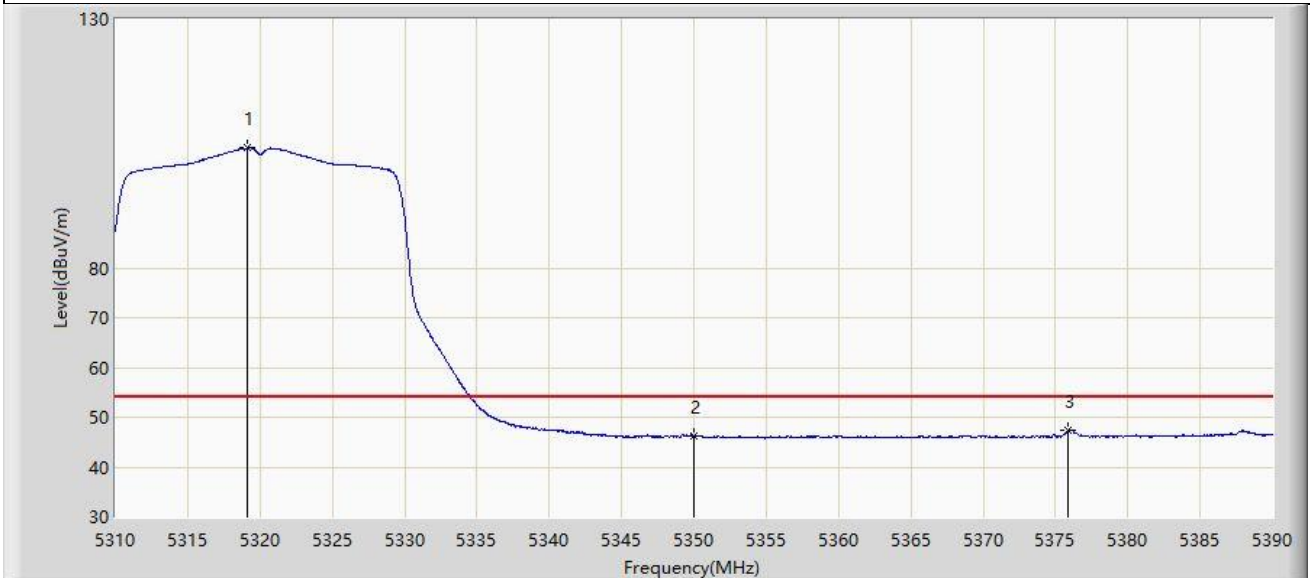


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5319.160	104.088	101.080	N/A	N/A	3.009	AV
2		5350.000	46.177	43.357	-7.823	54.000	2.820	AV
3	*	5375.880	47.317	44.322	-6.683	54.000	2.994	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

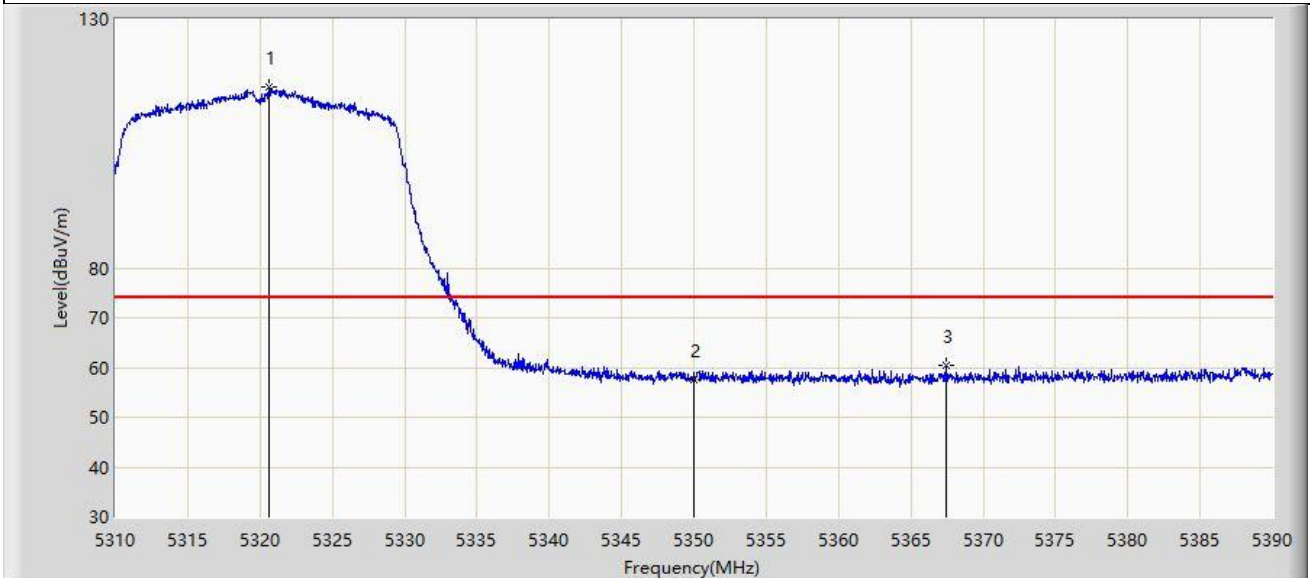


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5320.600	116.339	113.333	N/A	N/A	3.006	PK
2		5350.000	57.400	54.580	-16.600	74.000	2.820	PK
3	*	5367.480	60.406	57.551	-13.594	74.000	2.855	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

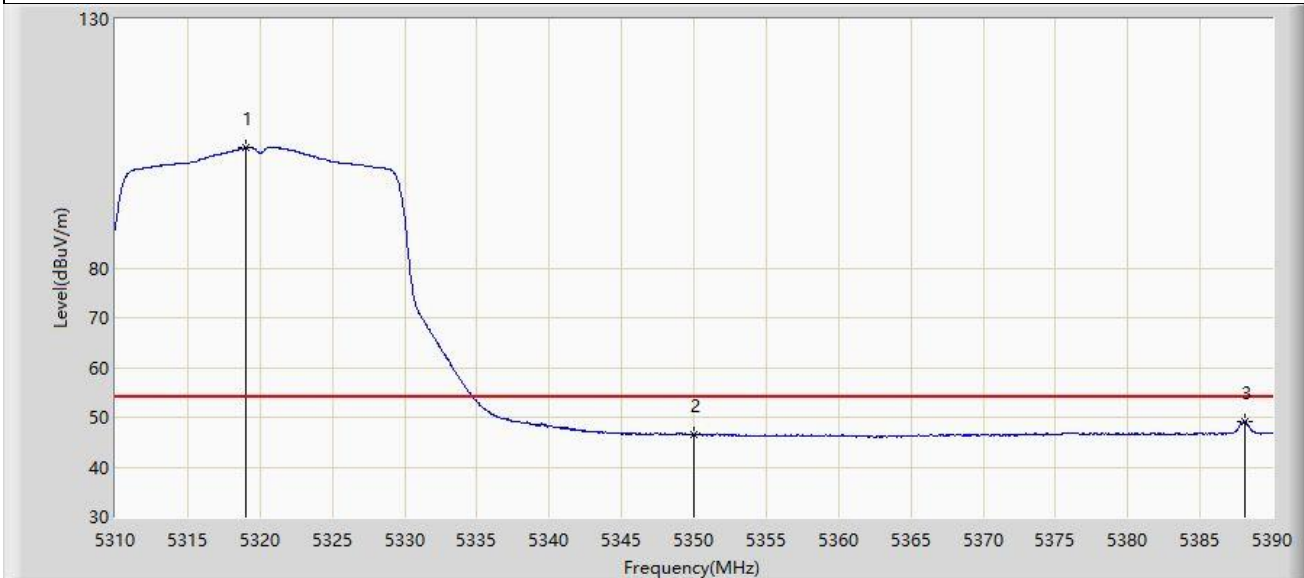


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5319.040	104.185	101.176	N/A	N/A	3.008	AV
2		5350.000	46.549	43.729	-7.451	54.000	2.820	AV
3	*	5388.080	49.127	45.894	-4.873	54.000	3.233	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

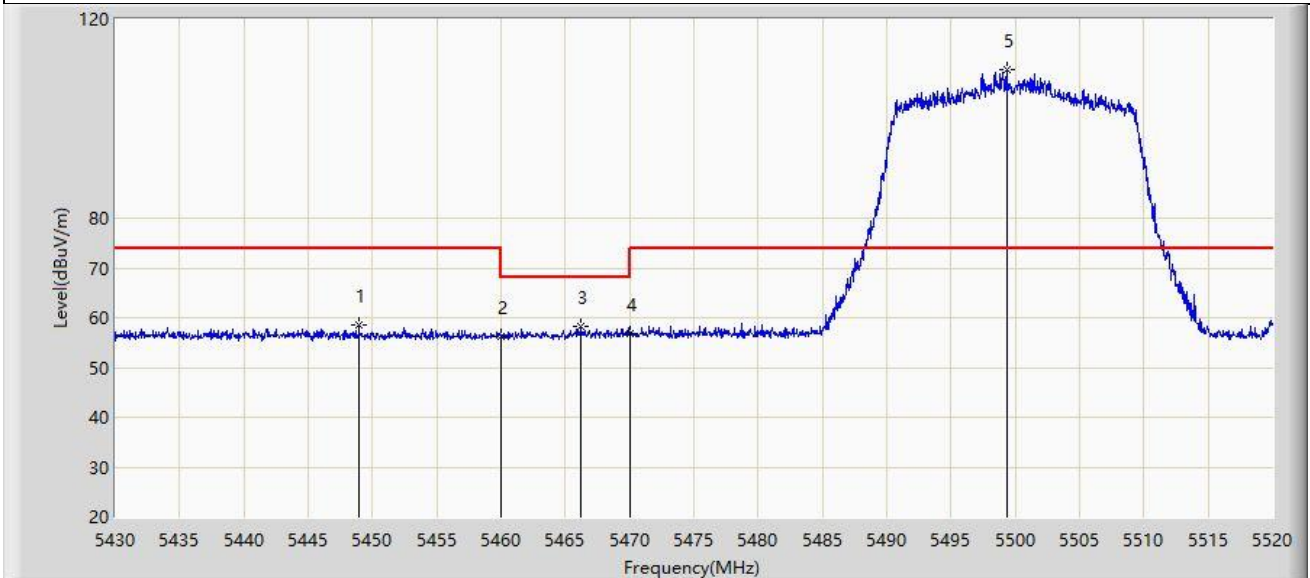


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5448.945	58.635	55.552	-15.365	74.000	3.083	PK
2		5460.000	56.172	53.023	-17.828	74.000	3.149	PK
3	*	5466.225	58.340	55.071	-9.860	68.200	3.269	PK
4		5470.000	56.878	53.536	-11.322	68.200	3.341	PK
5		5499.345	109.857	106.667	N/A	N/A	3.190	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

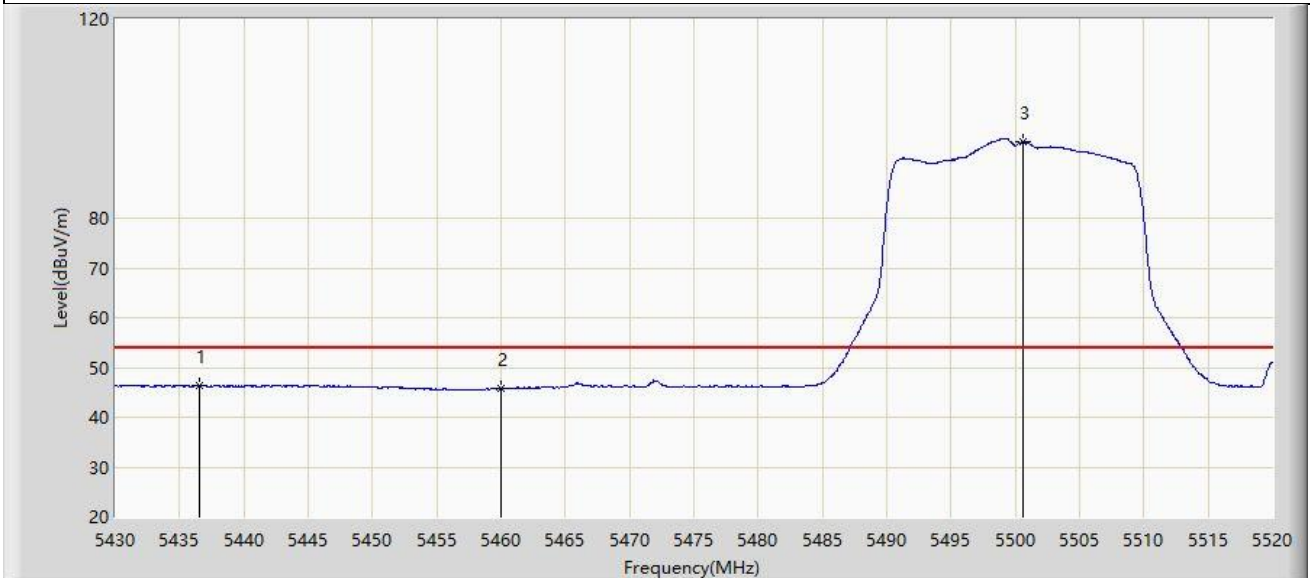


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5436.525	46.274	43.099	-7.726	54.000	3.175	AV
2		5460.000	45.707	42.558	-8.293	54.000	3.149	AV
3		5500.650	95.314	92.133	N/A	N/A	3.181	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

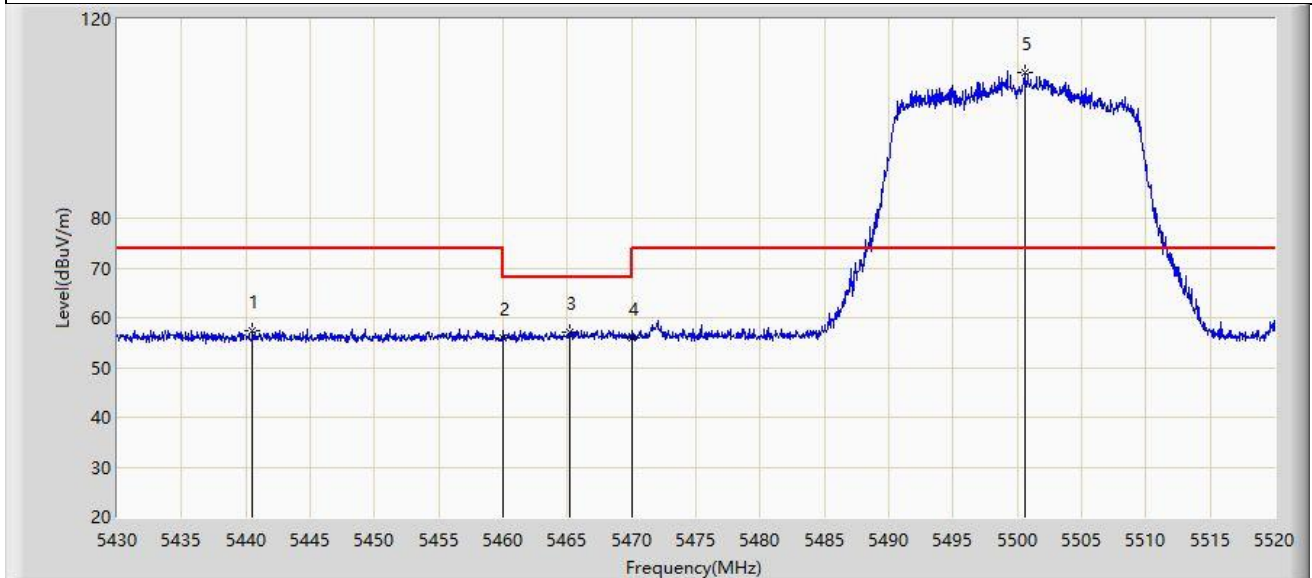


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5440.530	57.363	54.216	-16.637	74.000	3.147	PK
2		5460.000	56.023	52.874	-17.977	74.000	3.149	PK
3	*	5465.145	57.246	53.998	-10.954	68.200	3.248	PK
4		5470.000	56.053	52.711	-12.147	68.200	3.341	PK
5		5500.560	109.356	106.174	N/A	N/A	3.182	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

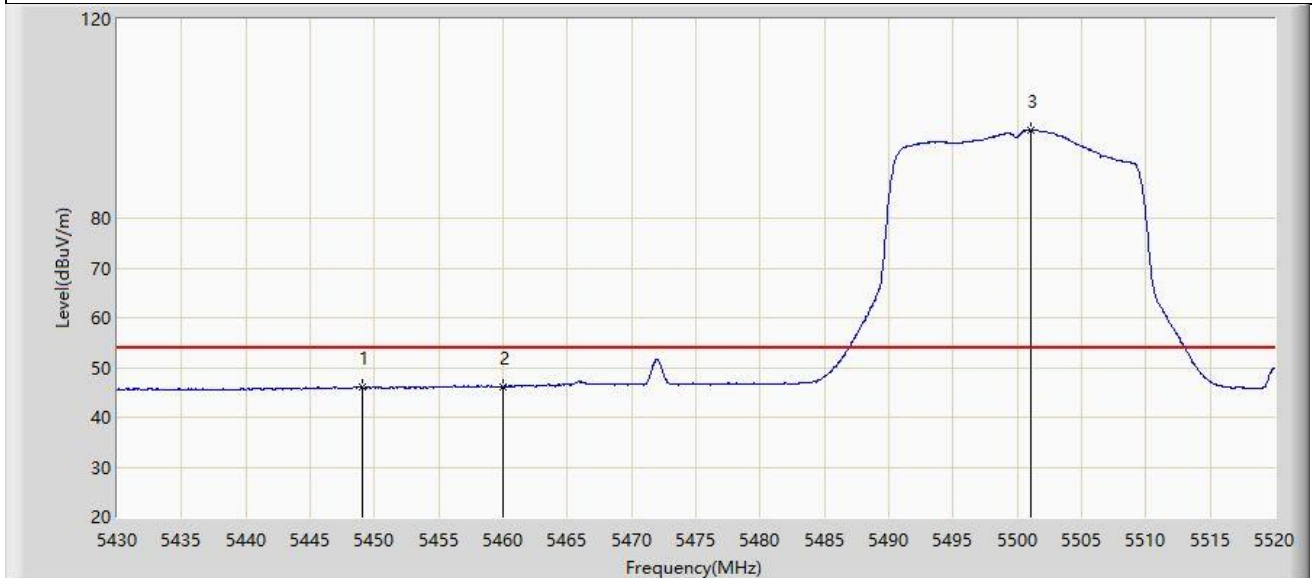


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5449.035	45.954	42.872	-8.046	54.000	3.082	AV
2	*	5460.000	46.067	42.918	-7.933	54.000	3.149	AV
3		5501.100	97.812	94.634	N/A	N/A	3.177	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

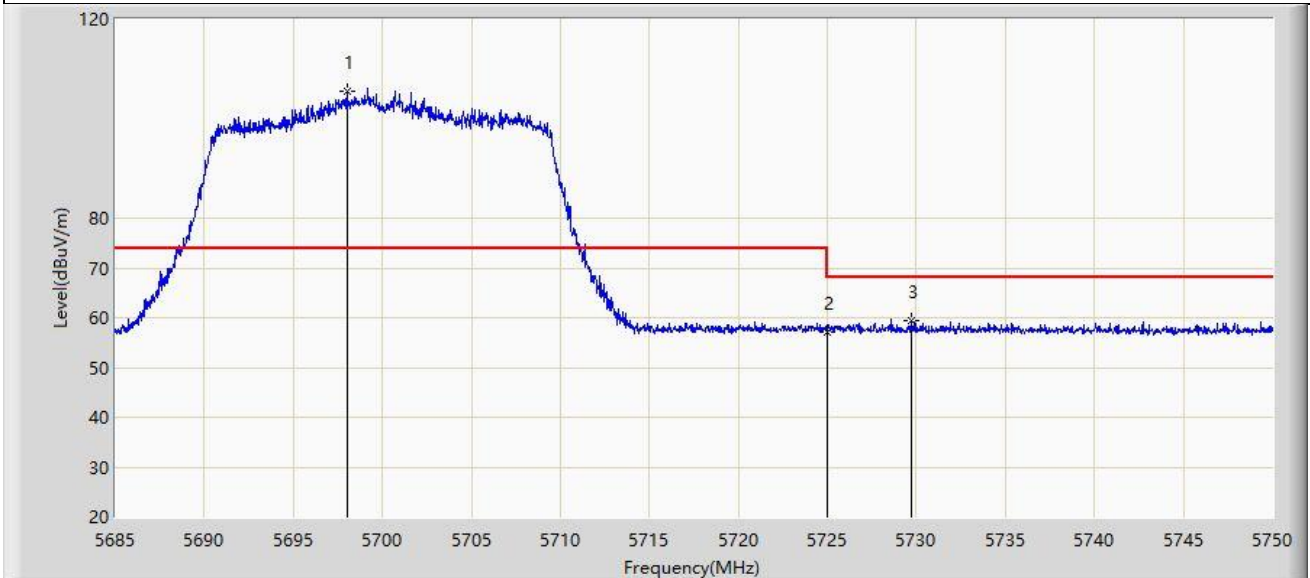


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5698.000	105.600	101.194	N/A	N/A	4.406	PK
2		5725.000	57.091	52.388	-11.109	68.200	4.703	PK
3	*	5729.687	59.528	54.878	-8.672	68.200	4.649	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

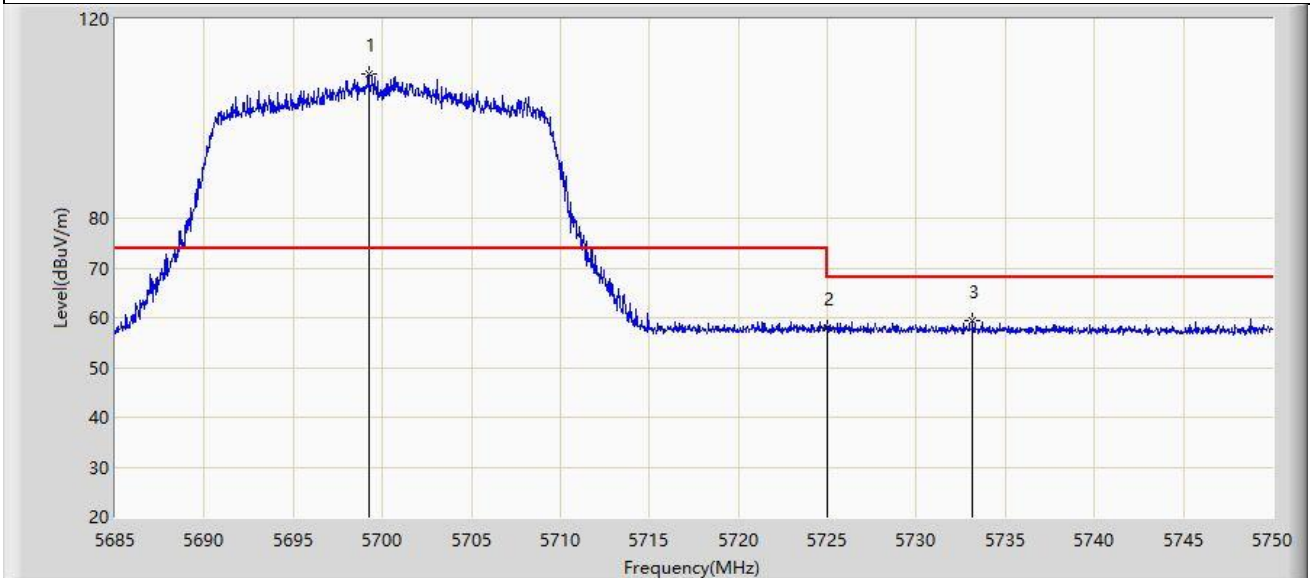


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5699.235	109.004	104.579	N/A	N/A	4.425	PK
2		5725.000	57.924	53.221	-10.276	68.200	4.703	PK
3	*	5733.165	59.338	54.750	-8.862	68.200	4.587	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

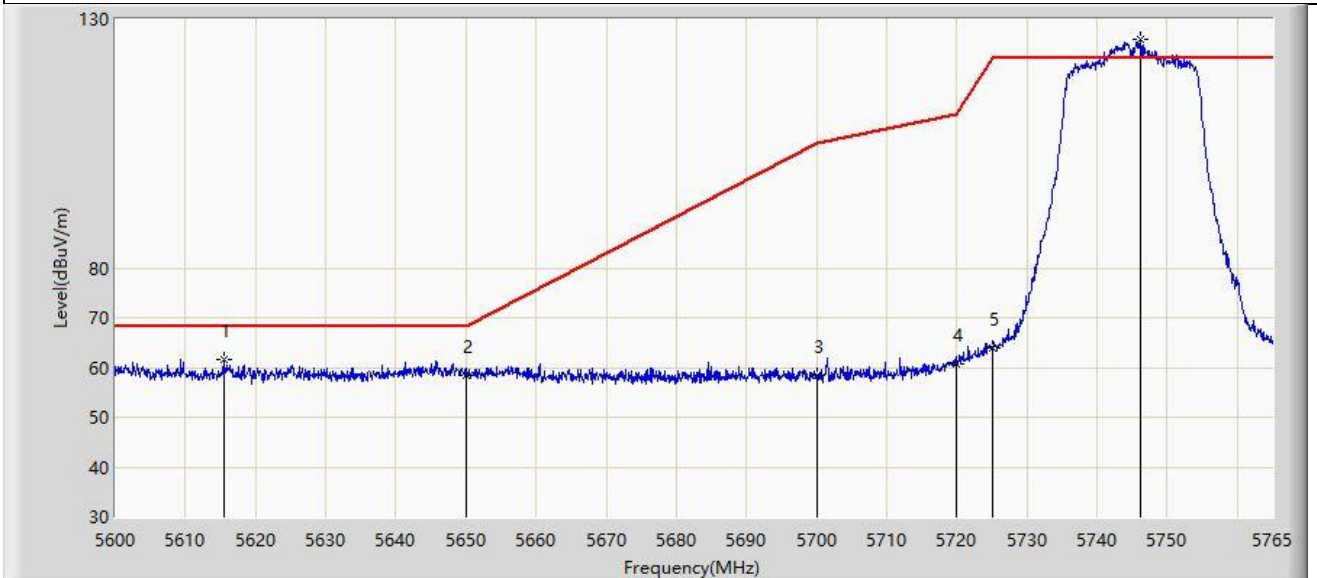


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5615.428	61.665	57.928	-6.535	68.200	3.736	PK
2		5650.000	58.469	54.346	-9.731	68.200	4.122	PK
3		5700.000	58.336	53.899	-46.864	105.200	4.437	PK
4		5720.000	60.675	56.011	-50.125	110.800	4.663	PK
5		5725.000	63.869	59.166	-58.331	122.200	4.703	PK
6		5746.272	125.856	121.420	N/A	N/A	4.436	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

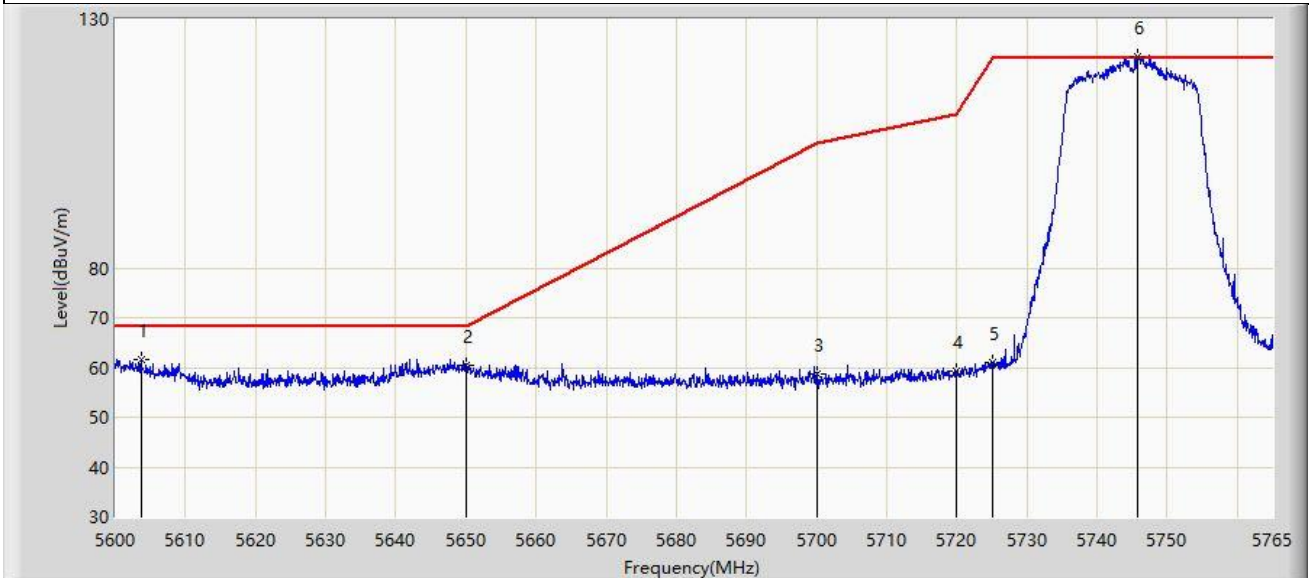


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5603.630	61.731	58.200	-6.469	68.200	3.531	PK
2		5650.000	60.405	56.282	-7.795	68.200	4.122	PK
3		5700.000	58.683	54.246	-46.517	105.200	4.437	PK
4		5720.000	59.240	54.576	-51.560	110.800	4.663	PK
5		5725.000	60.986	56.283	-61.214	122.200	4.703	PK
6		5745.777	122.462	118.032	N/A	N/A	4.430	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

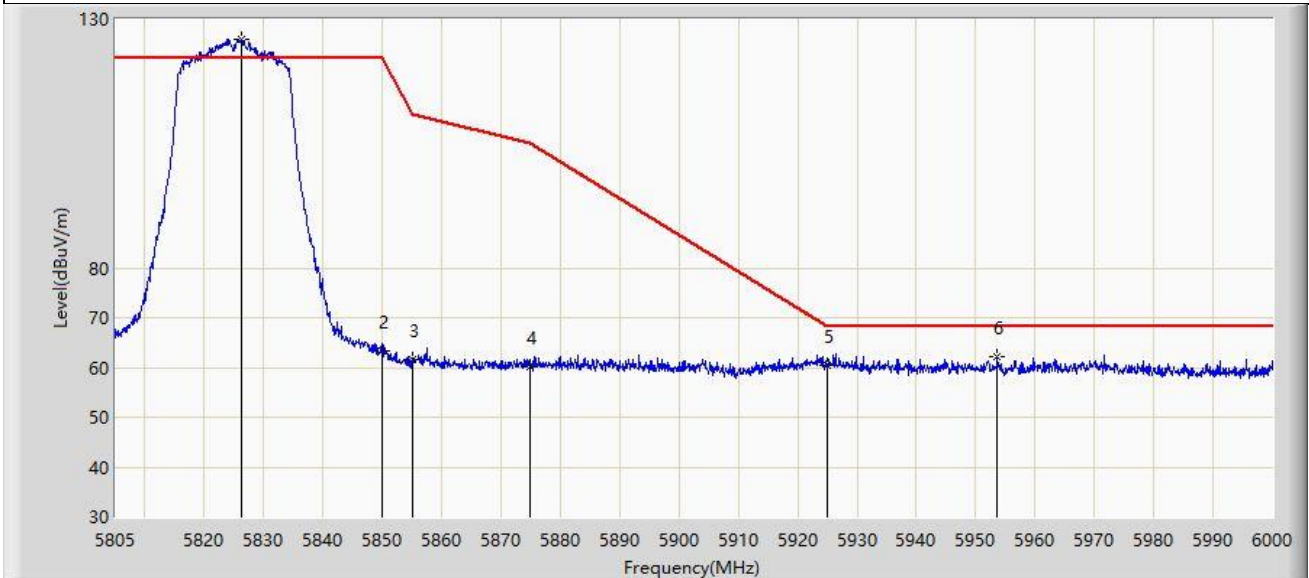


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5826.158	125.900	121.048	N/A	N/A	4.852	PK
2		5850.000	63.469	58.486	-58.731	122.200	4.984	PK
3		5855.000	61.681	56.643	-49.119	110.800	5.038	PK
4		5875.000	60.015	54.884	-45.185	105.200	5.131	PK
5		5925.000	60.449	55.214	-7.751	68.200	5.236	PK
6	*	5953.687	62.112	56.742	-6.088	68.200	5.371	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

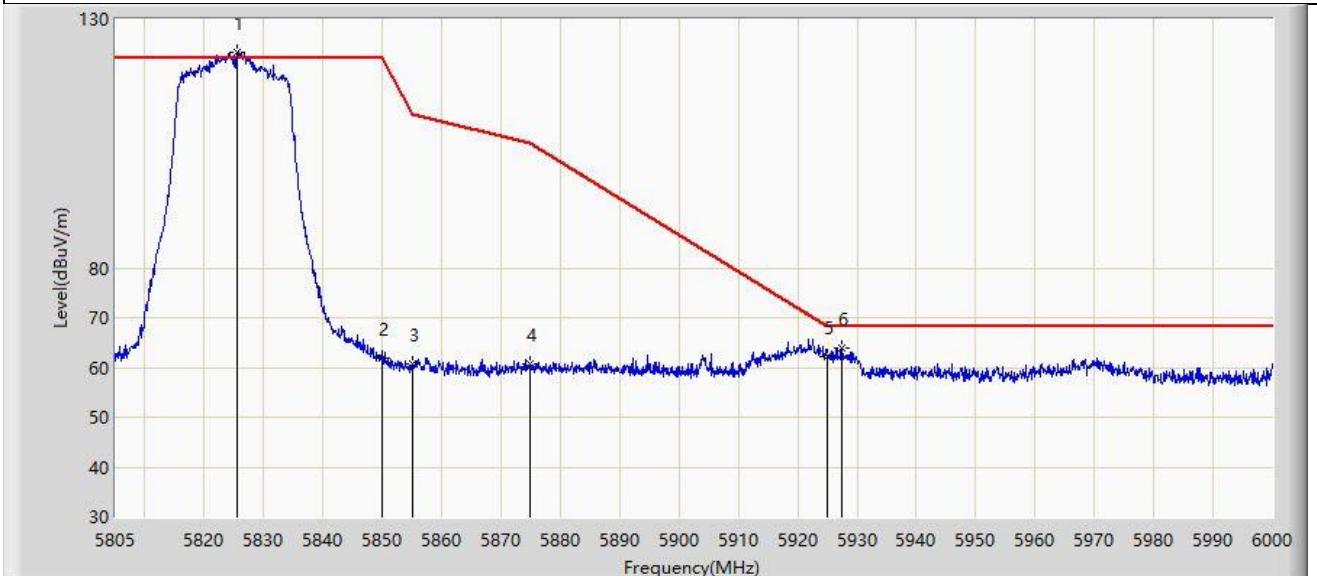


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5825.572	123.386	118.527	N/A	N/A	4.858	PK
2		5850.000	61.969	56.986	-60.231	122.200	4.984	PK
3		5855.000	60.718	55.680	-50.082	110.800	5.038	PK
4		5875.000	60.756	55.625	-44.444	105.200	5.131	PK
5		5925.000	62.089	56.854	-6.111	68.200	5.236	PK
6	*	5927.362	63.909	58.660	-4.291	68.200	5.248	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

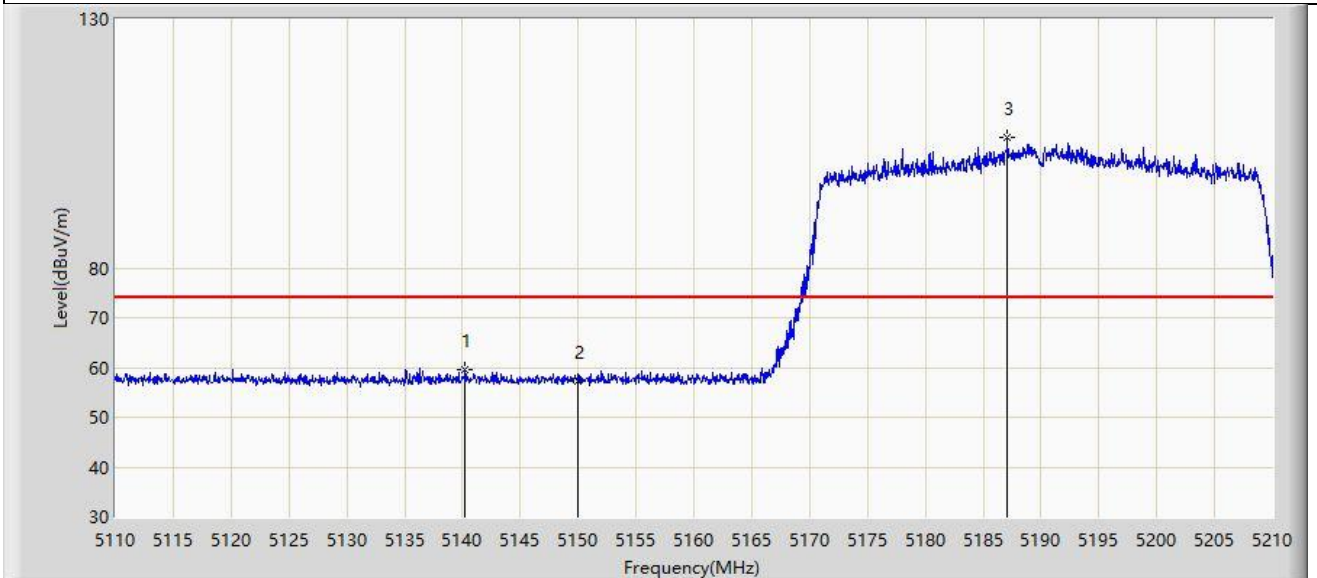


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5140.250	59.641	56.263	-14.359	74.000	3.378	PK
2		5150.000	57.239	53.757	-16.761	74.000	3.482	PK
3		5187.100	106.322	103.210	N/A	N/A	3.113	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

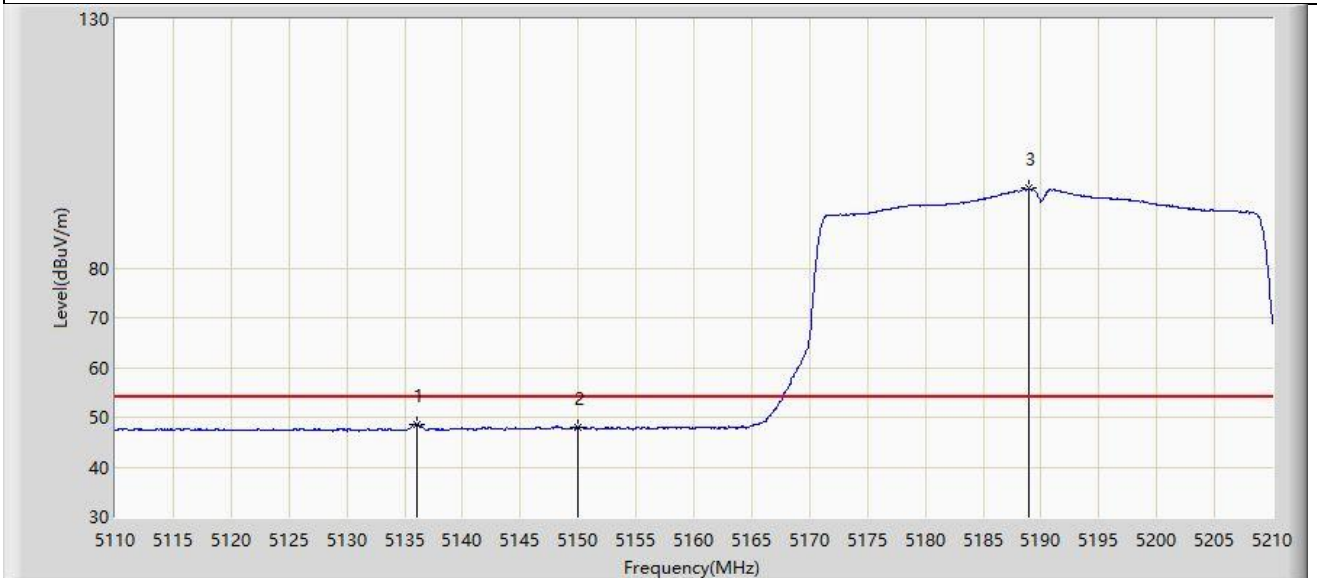


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5136.050	48.571	45.246	-5.429	54.000	3.325	AV
2		5150.000	47.934	44.452	-6.066	54.000	3.482	AV
3		5188.950	95.950	92.878	N/A	N/A	3.072	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

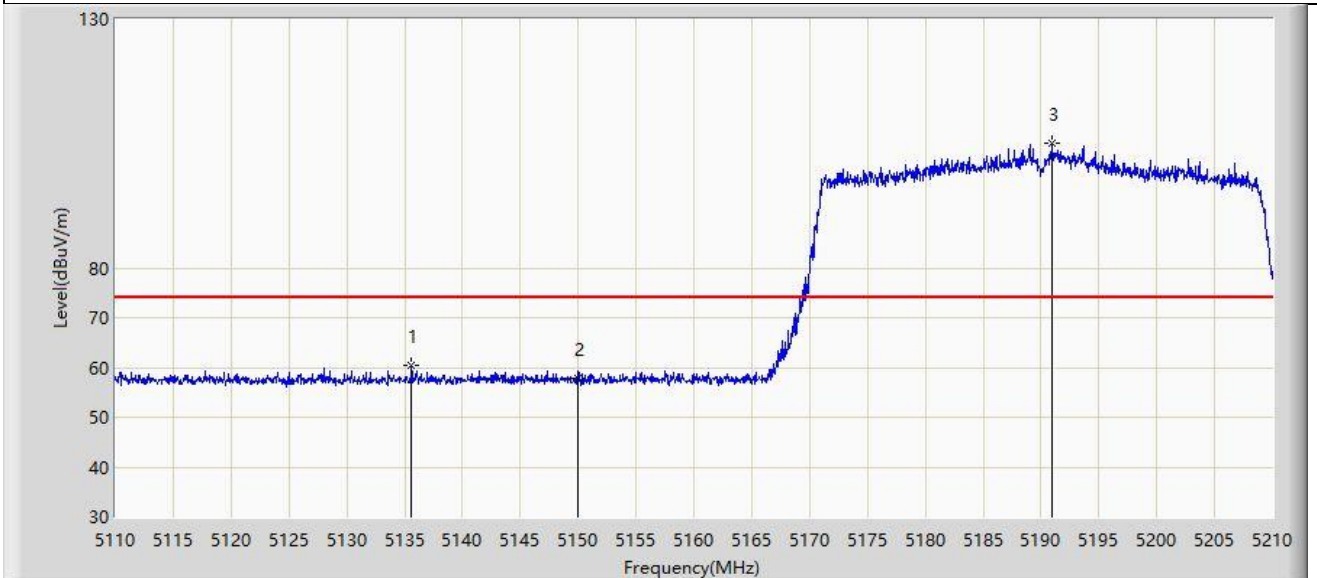


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5135.600	60.479	57.160	-13.521	74.000	3.319	PK
2		5150.000	57.904	54.422	-16.096	74.000	3.482	PK
3		5191.000	105.091	102.064	N/A	N/A	3.027	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

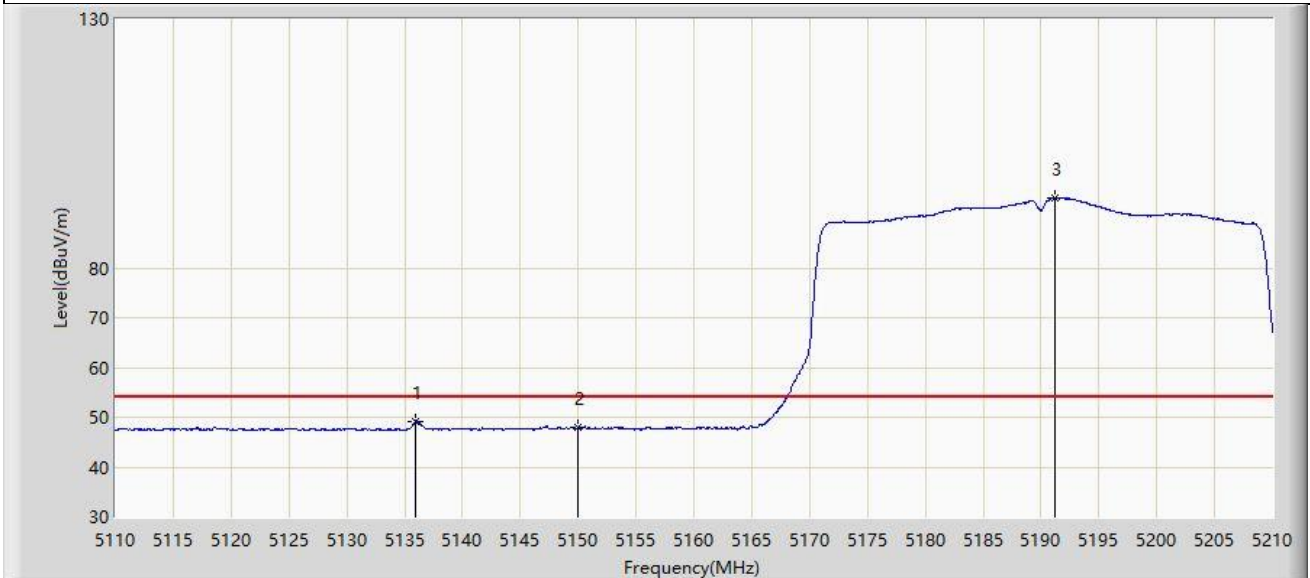


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5135.900	49.167	45.844	-4.833	54.000	3.322	AV
2		5150.000	47.848	44.366	-6.152	54.000	3.482	AV
3		5191.200	94.144	91.121	N/A	N/A	3.024	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

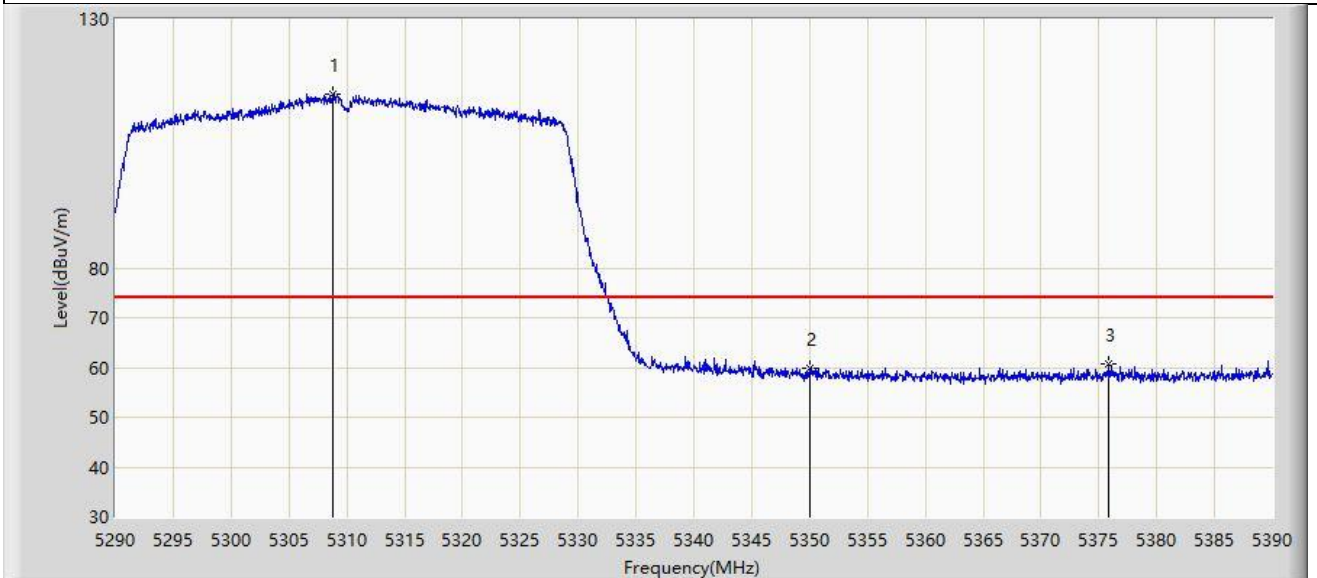


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5308.850	115.002	112.144	N/A	N/A	2.858	PK
2		5350.000	59.776	56.956	-14.224	74.000	2.820	PK
3	*	5375.900	60.631	57.636	-13.369	74.000	2.995	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

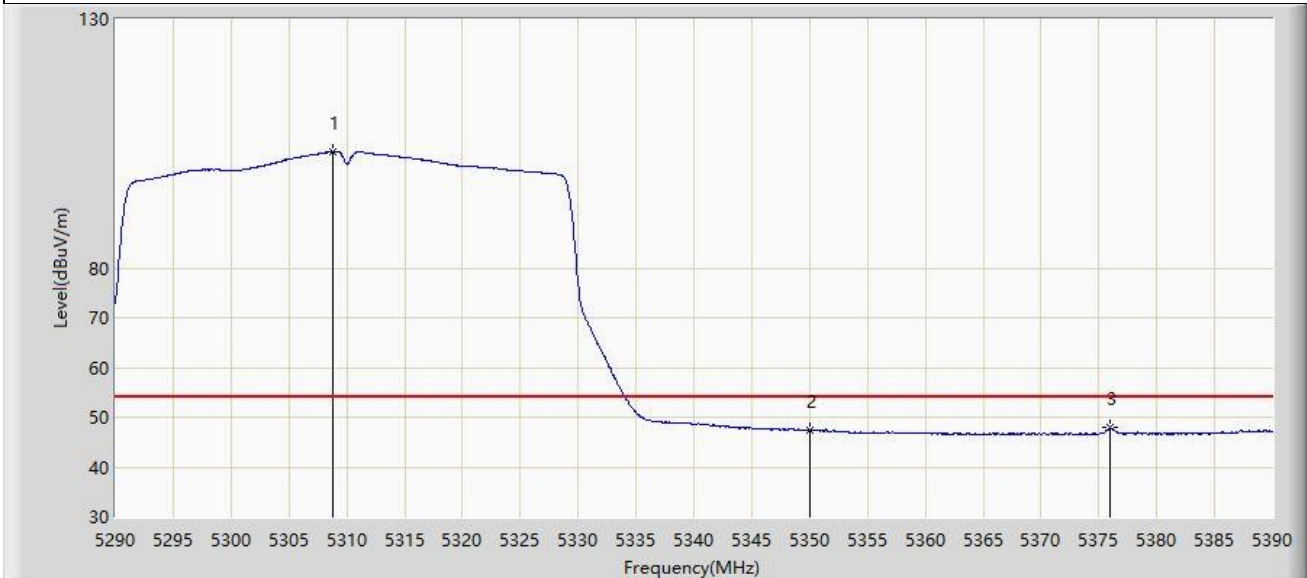


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5308.750	103.306	100.449	N/A	N/A	2.857	AV
2		5350.000	47.455	44.635	-6.545	54.000	2.820	AV
3	*	5376.000	47.911	44.914	-6.089	54.000	2.997	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

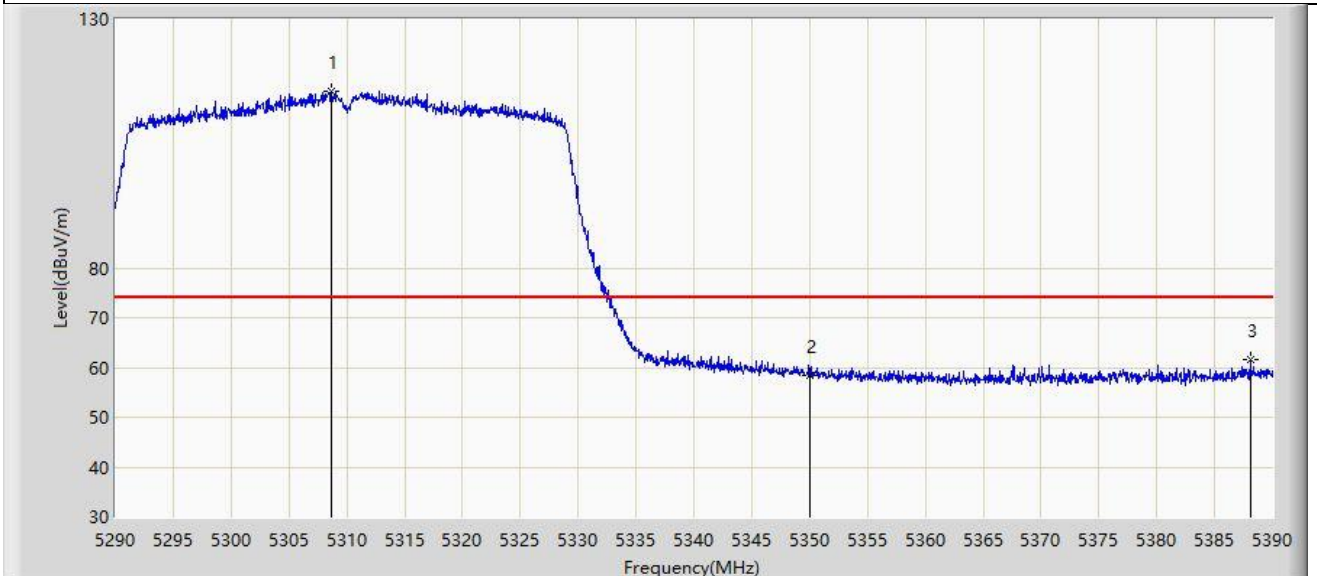


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5308.650	115.604	112.749	N/A	N/A	2.855	PK
2		5350.000	58.440	55.620	-15.560	74.000	2.820	PK
3	*	5388.100	61.626	58.393	-12.374	74.000	3.233	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

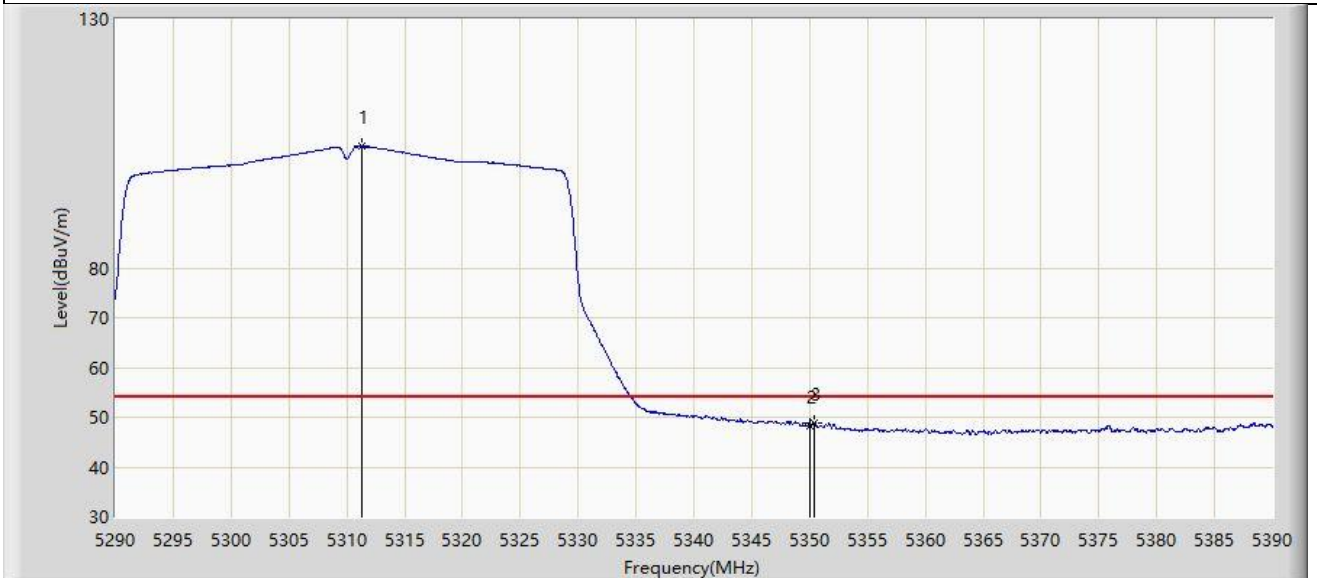


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.250	104.381	101.485	N/A	N/A	2.895	AV
2		5350.000	48.171	45.351	-5.829	54.000	2.820	AV
3	*	5350.450	48.973	46.161	-5.027	54.000	2.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

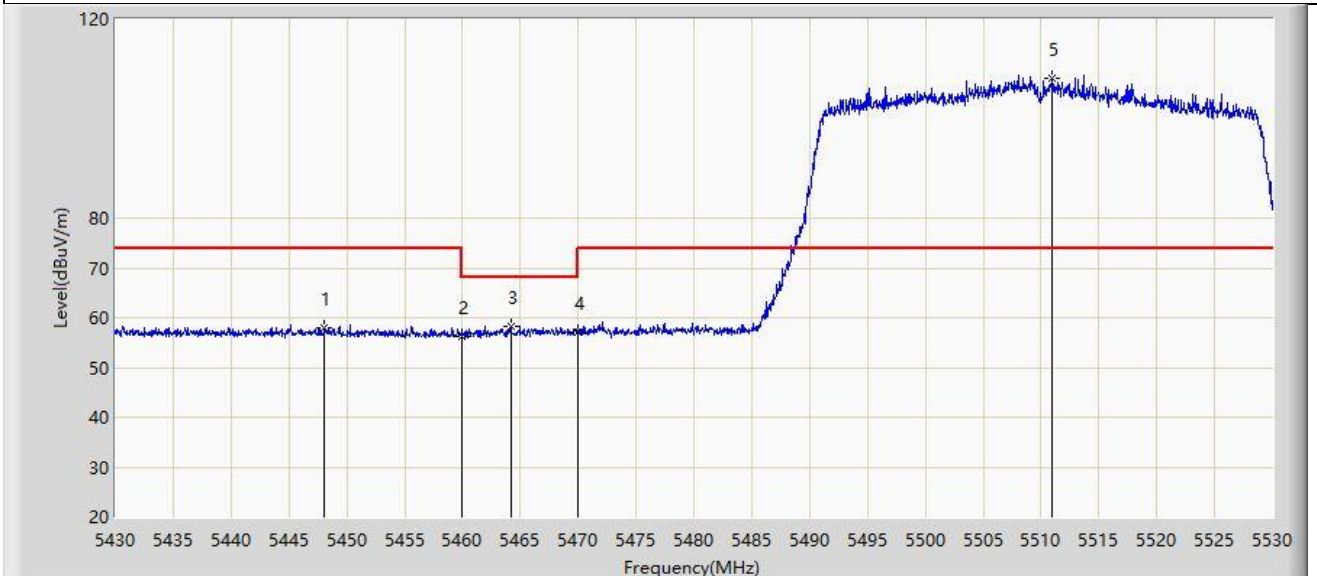


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5448.100	58.102	55.013	-15.898	74.000	3.089	PK
2		5460.000	56.204	53.055	-17.796	74.000	3.149	PK
3	*	5464.150	58.146	54.917	-10.054	68.200	3.229	PK
4		5470.000	57.099	53.757	-11.101	68.200	3.341	PK
5		5511.000	108.073	104.984	N/A	N/A	3.089	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

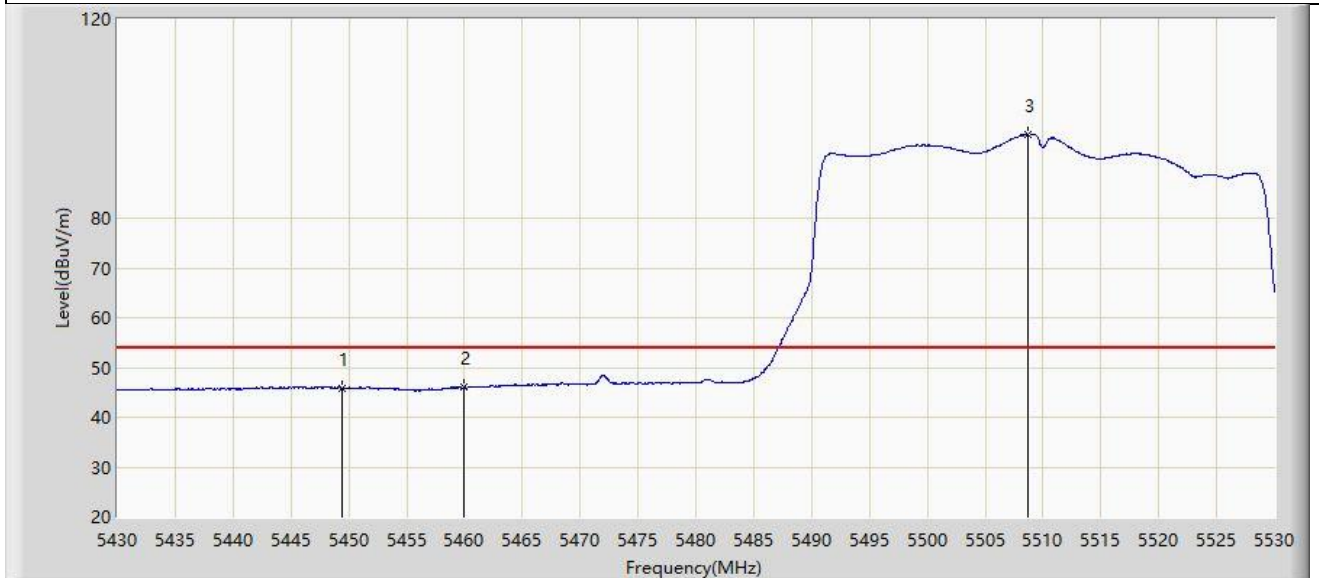


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5449.400	45.936	42.857	-8.064	54.000	3.079	AV
2	*	5460.000	46.016	42.867	-7.984	54.000	3.149	AV
3		5508.650	96.869	93.756	N/A	N/A	3.113	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

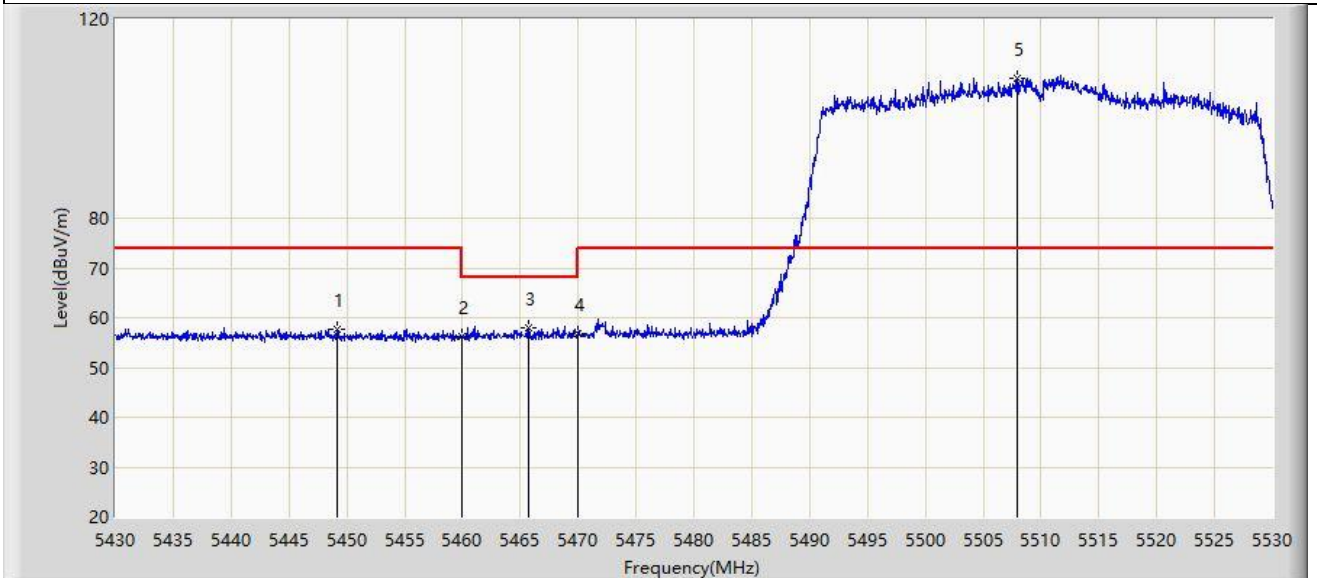


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5449.200	57.645	54.564	-16.355	74.000	3.081	PK
2		5460.000	56.251	53.102	-17.749	74.000	3.149	PK
3	*	5465.700	57.880	54.621	-10.320	68.200	3.259	PK
4		5470.000	56.747	53.405	-11.453	68.200	3.341	PK
5		5508.000	108.089	104.969	N/A	N/A	3.120	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

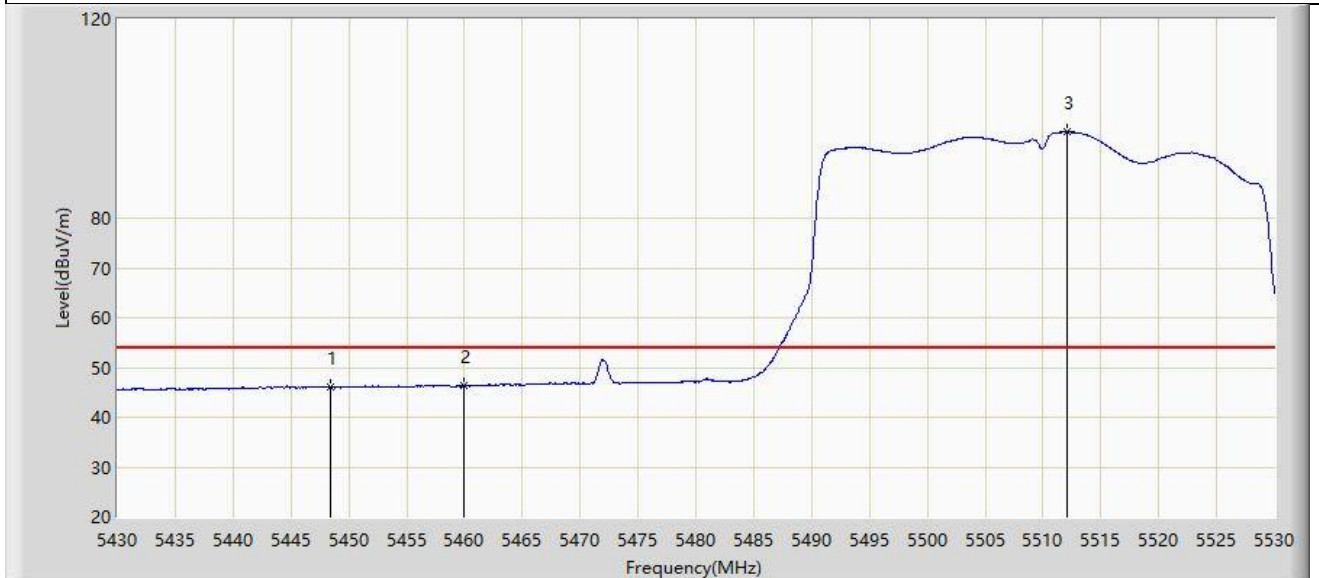


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5448.450	46.161	43.074	-7.839	54.000	3.087	AV
2	*	5460.000	46.295	43.146	-7.705	54.000	3.149	AV
3		5512.050	97.260	94.175	N/A	N/A	3.085	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

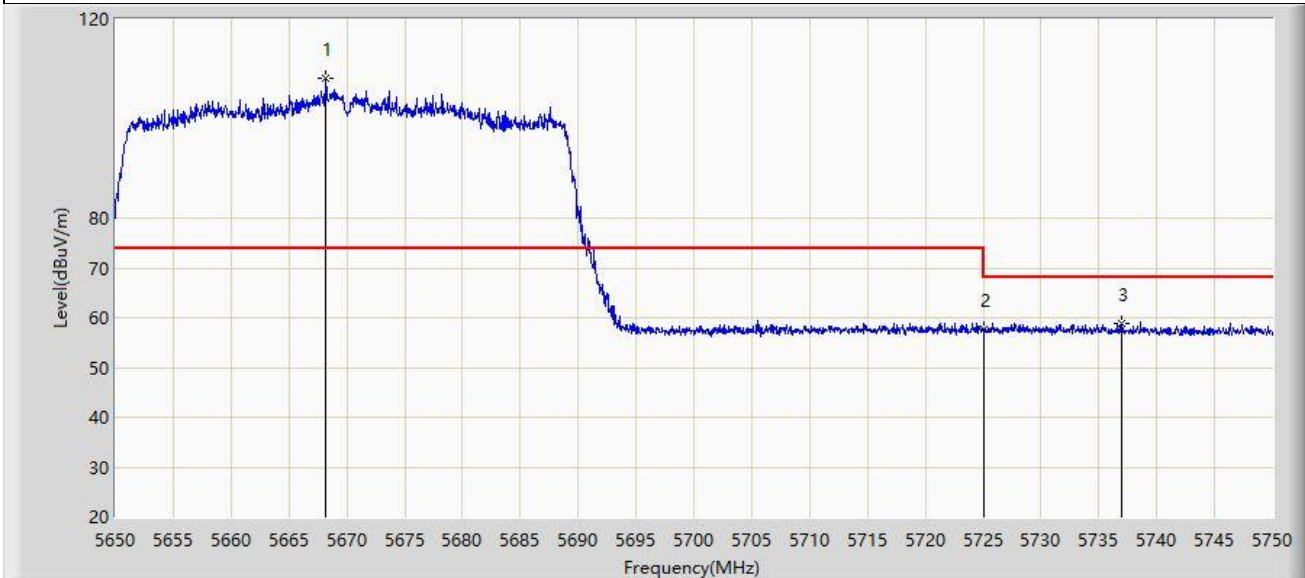


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5668.200	108.257	104.229	N/A	N/A	4.028	PK
2		5725.000	57.539	52.836	-10.661	68.200	4.703	PK
3	*	5737.000	58.941	54.421	-9.259	68.200	4.520	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

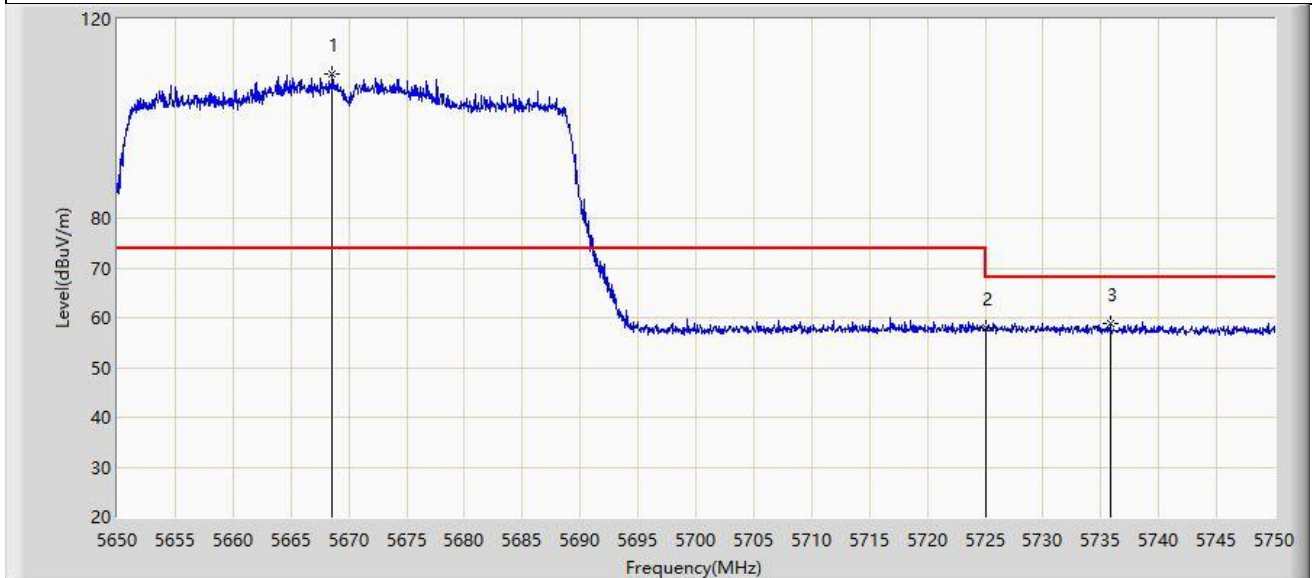


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5668.600	109.012	104.985	N/A	N/A	4.027	PK
2		5725.000	57.946	53.243	-10.254	68.200	4.703	PK
3	*	5735.850	58.799	54.258	-9.401	68.200	4.541	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

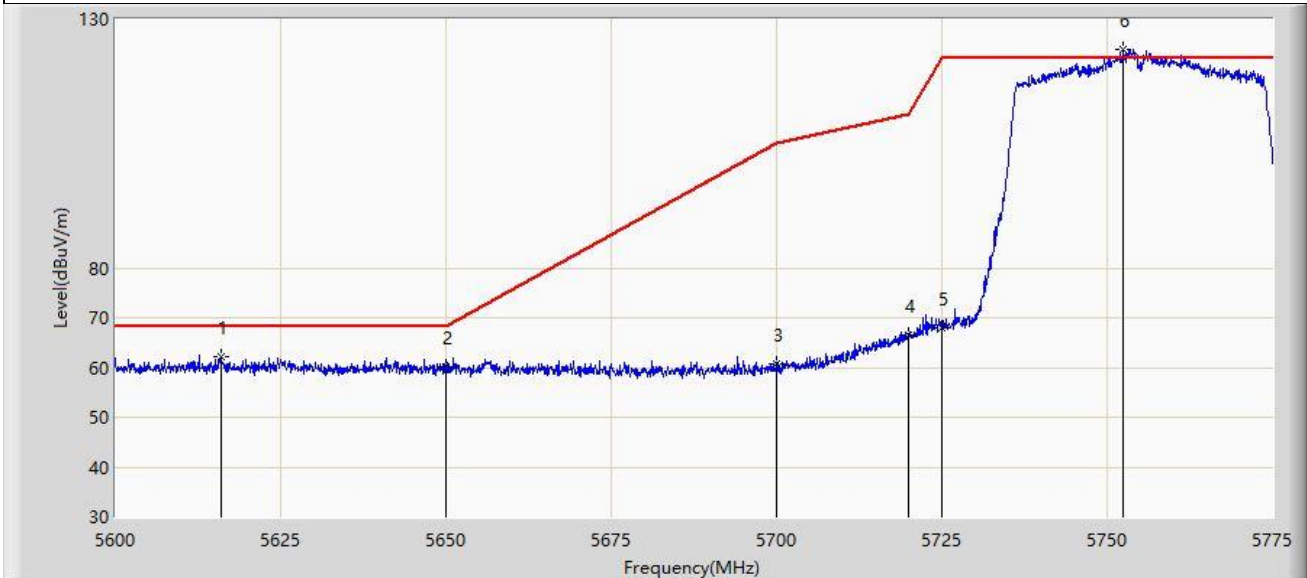


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5616.013	62.149	58.399	-6.051	68.200	3.749	PK
2		5650.000	60.165	56.042	-8.035	68.200	4.122	PK
3		5700.000	60.764	56.327	-44.436	105.200	4.437	PK
4		5720.000	66.530	61.866	-44.270	110.800	4.663	PK
5		5725.000	67.969	63.266	-54.231	122.200	4.703	PK
6		5752.425	124.048	119.539	N/A	N/A	4.509	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

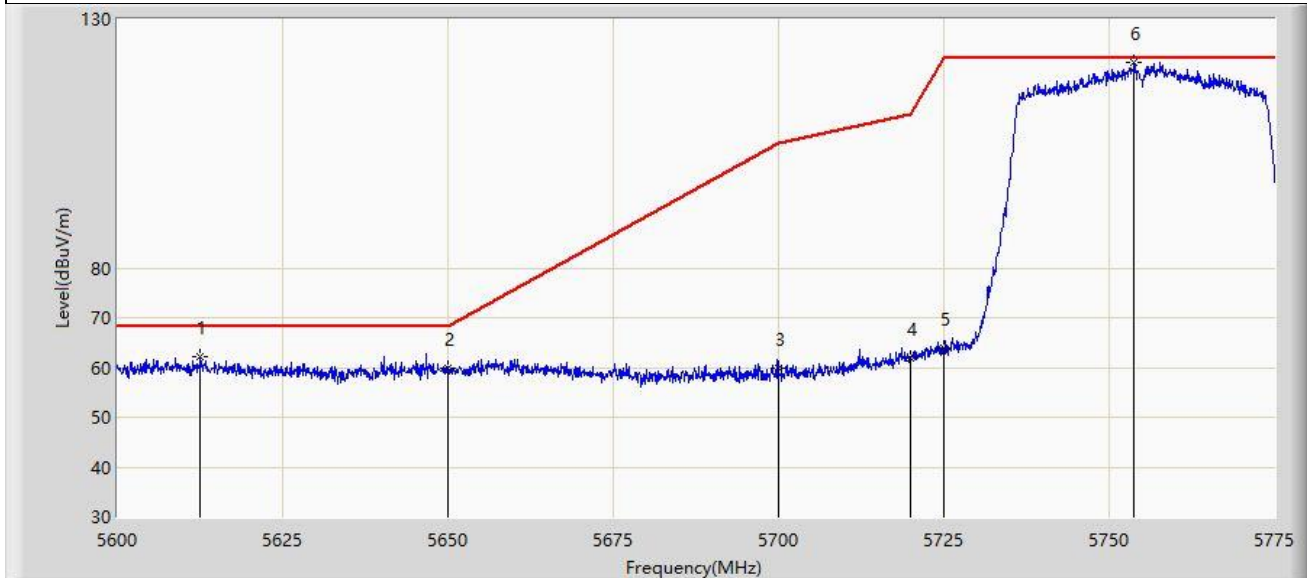


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5612.600	62.261	58.587	-5.939	68.200	3.674	PK
2		5650.000	59.717	55.594	-8.483	68.200	4.122	PK
3		5700.000	59.969	55.532	-45.231	105.200	4.437	PK
4		5720.000	61.863	57.199	-48.937	110.800	4.663	PK
5		5725.000	63.900	59.197	-58.300	122.200	4.703	PK
6		5753.825	121.358	116.832	N/A	N/A	4.526	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

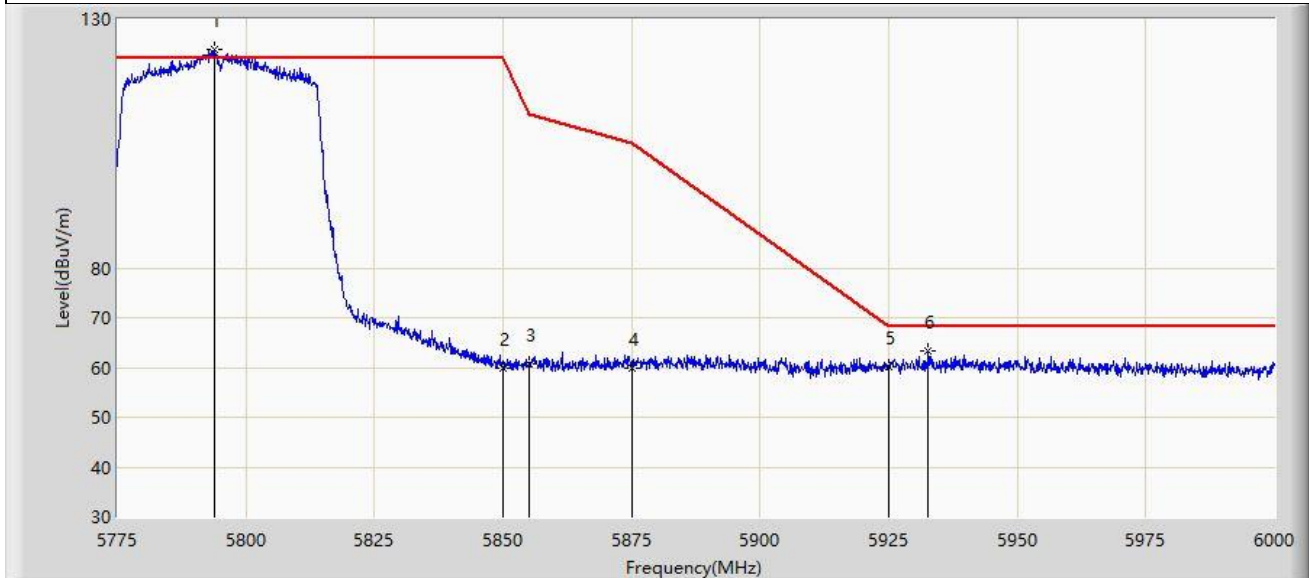


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5793.788	123.779	118.706	N/A	N/A	5.073	PK
2		5850.000	59.948	54.965	-62.252	122.200	4.984	PK
3		5855.000	60.641	55.603	-50.159	110.800	5.038	PK
4		5875.000	59.992	54.861	-45.208	105.200	5.131	PK
5		5925.000	60.253	55.018	-7.947	68.200	5.236	PK
6	*	5932.725	63.199	57.928	-5.001	68.200	5.271	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

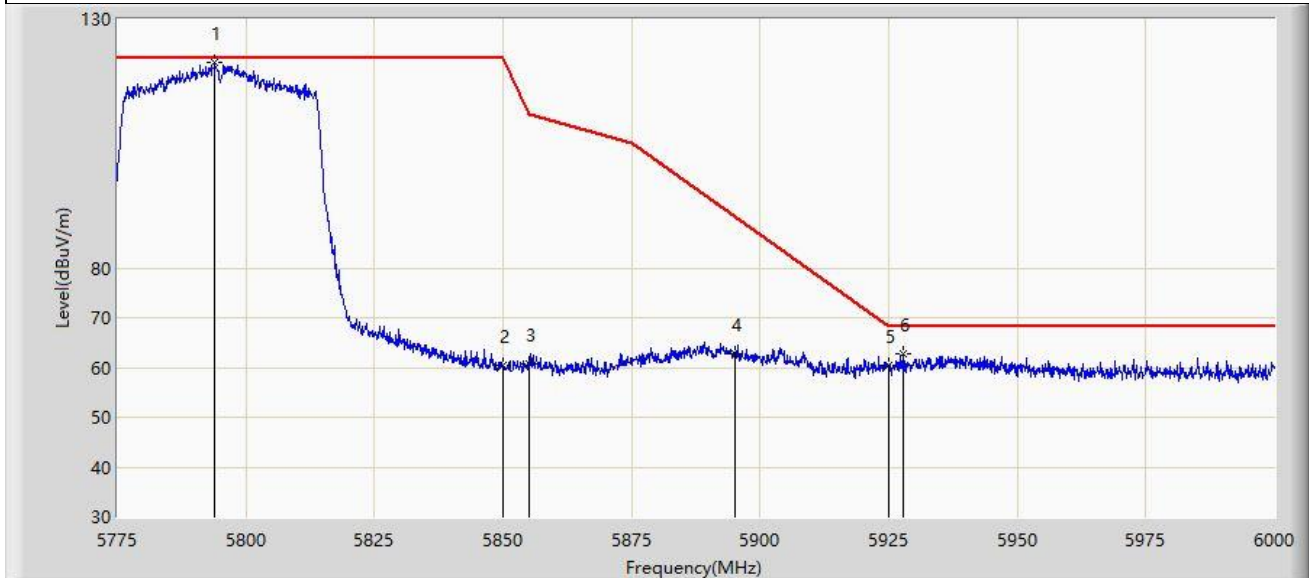


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5794.013	121.334	116.259	N/A	N/A	5.075	PK
2		5850.000	60.330	55.347	-61.870	122.200	4.984	PK
3		5855.000	60.783	55.745	-50.017	110.800	5.038	PK
4		5895.000	62.844	57.729	-27.556	90.400	5.116	PK
5		5925.000	60.299	55.064	-7.901	68.200	5.236	PK
6	*	5927.888	62.779	57.527	-5.421	68.200	5.253	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

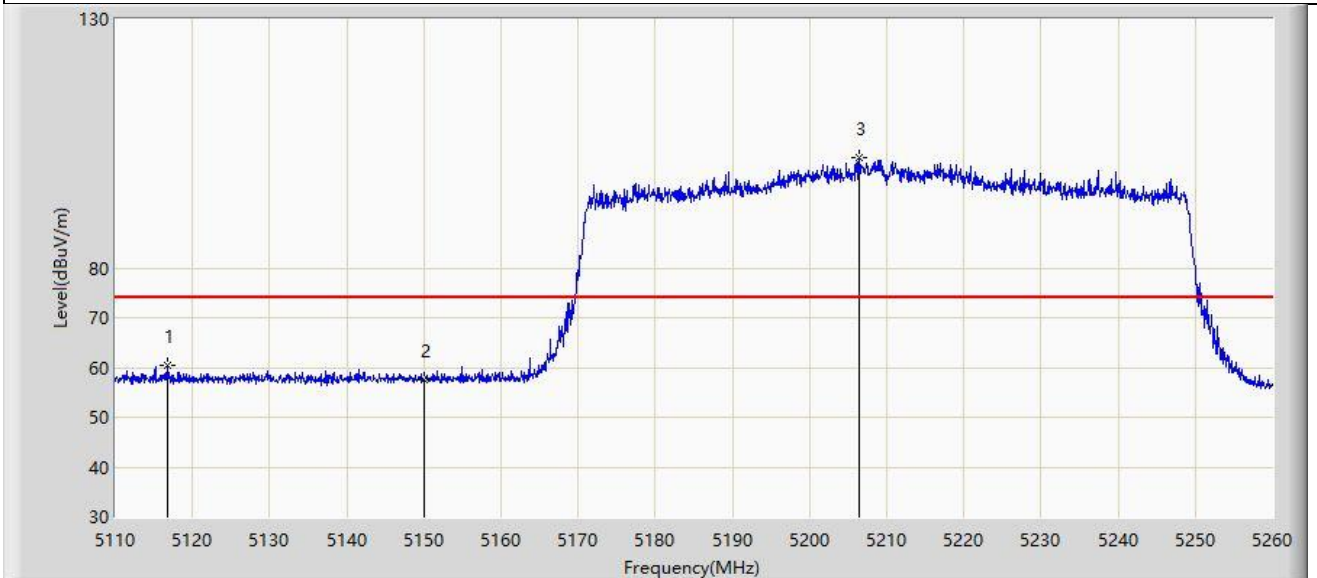


No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1	*	5116.825	60.455	57.184	-13.545	74.000	3.271	PK
2		5150.000	57.539	54.057	-16.461	74.000	3.482	PK
3		5206.375	102.219	99.336	N/A	N/A	2.883	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

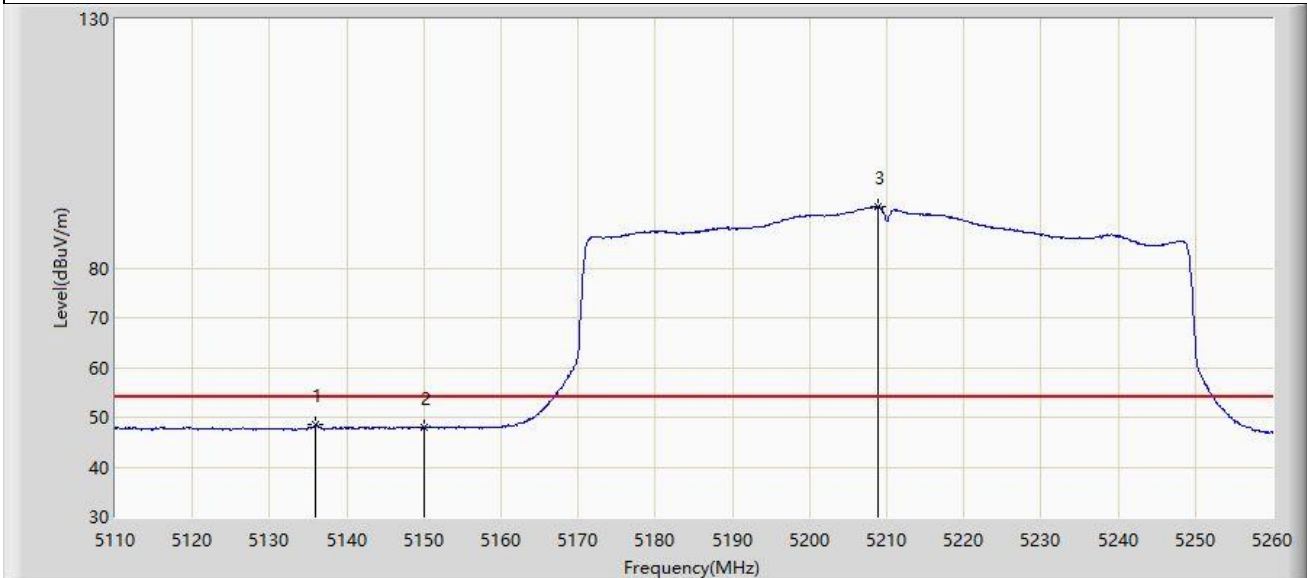


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5135.950	48.502	45.179	-5.498	54.000	3.323	AV
2		5150.000	48.004	44.522	-5.996	54.000	3.482	AV
3		5208.850	92.306	89.414	N/A	N/A	2.892	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

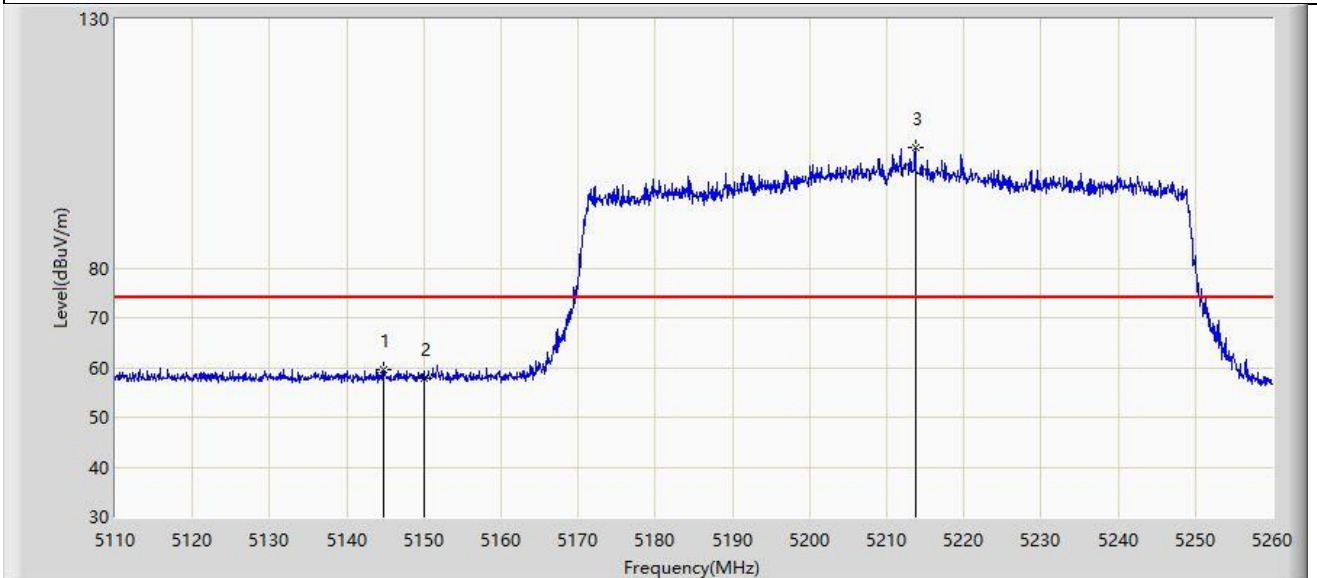


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5144.725	59.662	56.228	-14.338	74.000	3.435	PK
2		5150.000	57.913	54.431	-16.087	74.000	3.482	PK
3		5213.725	104.174	101.263	N/A	N/A	2.910	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

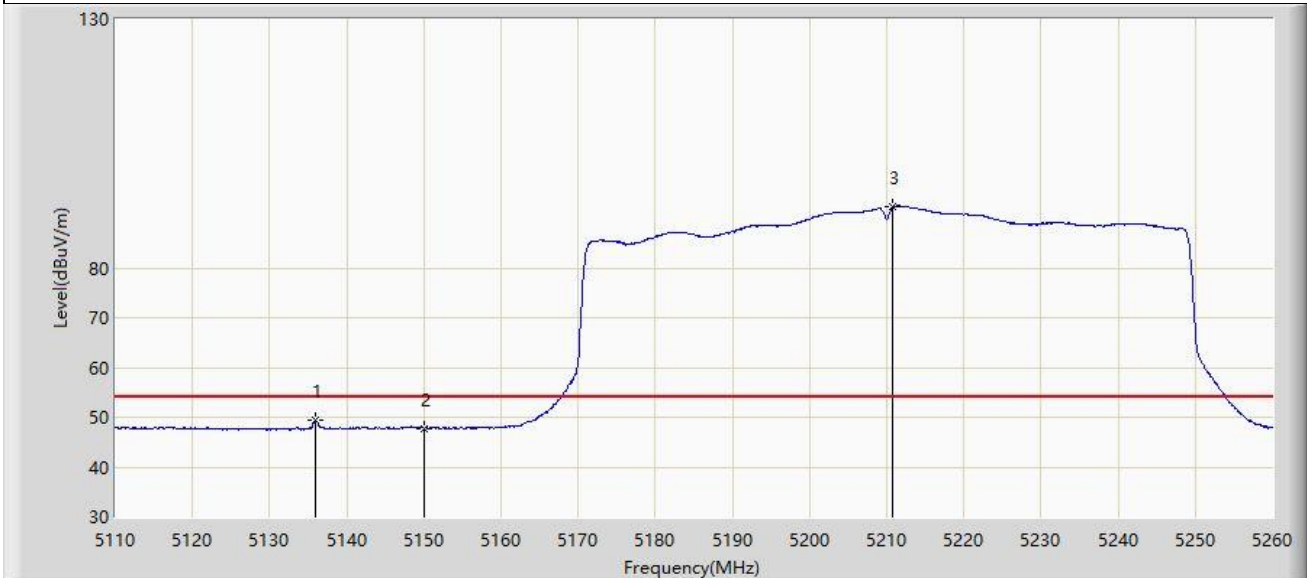


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5135.950	49.278	45.955	-4.722	54.000	3.323	AV
2		5150.000	47.667	44.185	-6.333	54.000	3.482	AV
3		5210.800	92.293	89.393	N/A	N/A	2.900	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

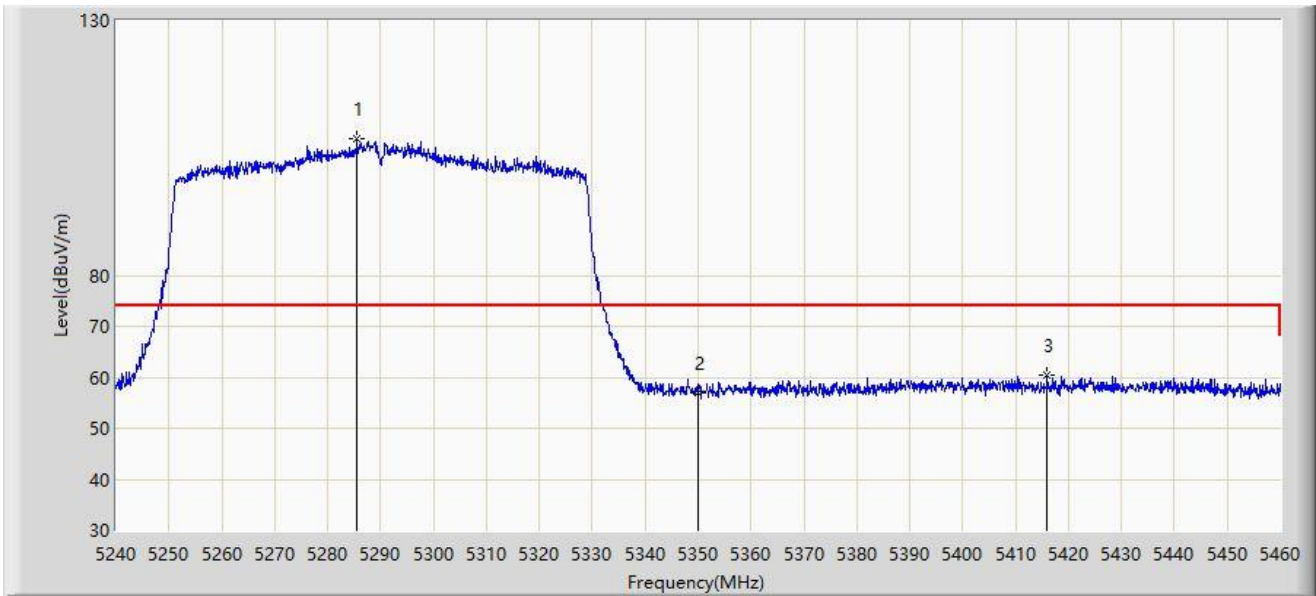


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5285.540	106.886	104.347	N/A	N/A	2.538	PK
2		5350.000	57.073	54.253	-16.927	74.000	2.820	PK
3	*	5416.000	60.307	56.907	-13.693	74.000	3.399	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

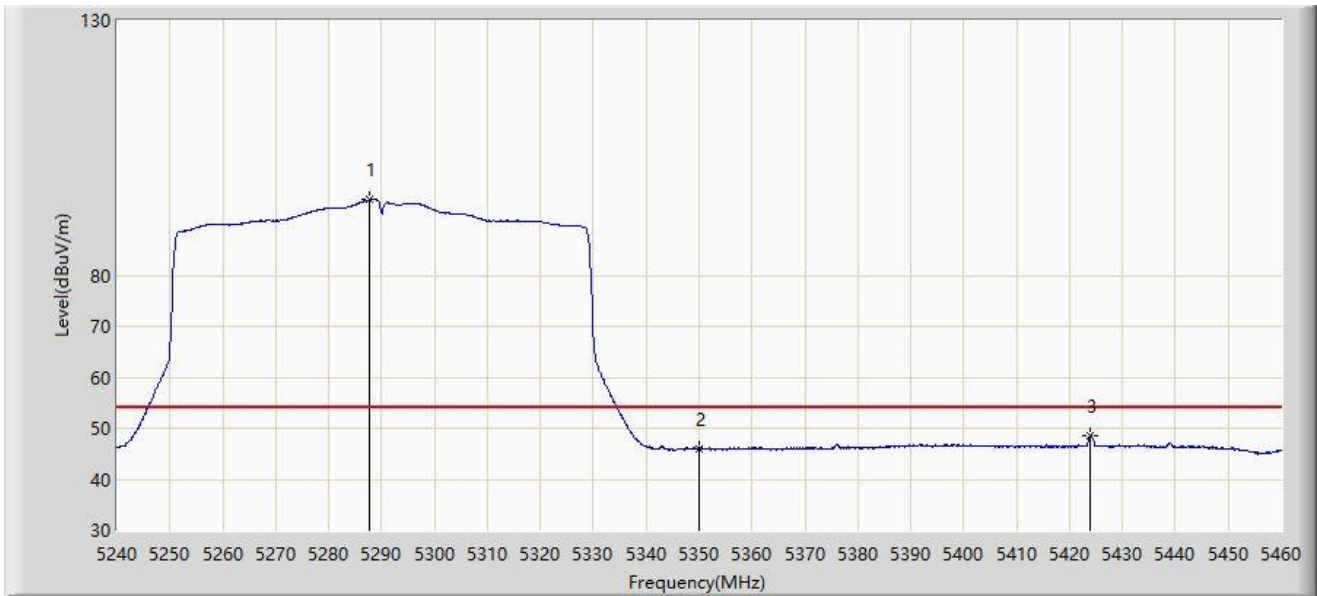


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5287.740	94.852	92.283	N/A	N/A	2.569	AV
2		5350.000	46.003	43.183	-7.997	54.000	2.820	AV
3	*	5423.920	48.589	45.268	-5.411	54.000	3.321	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

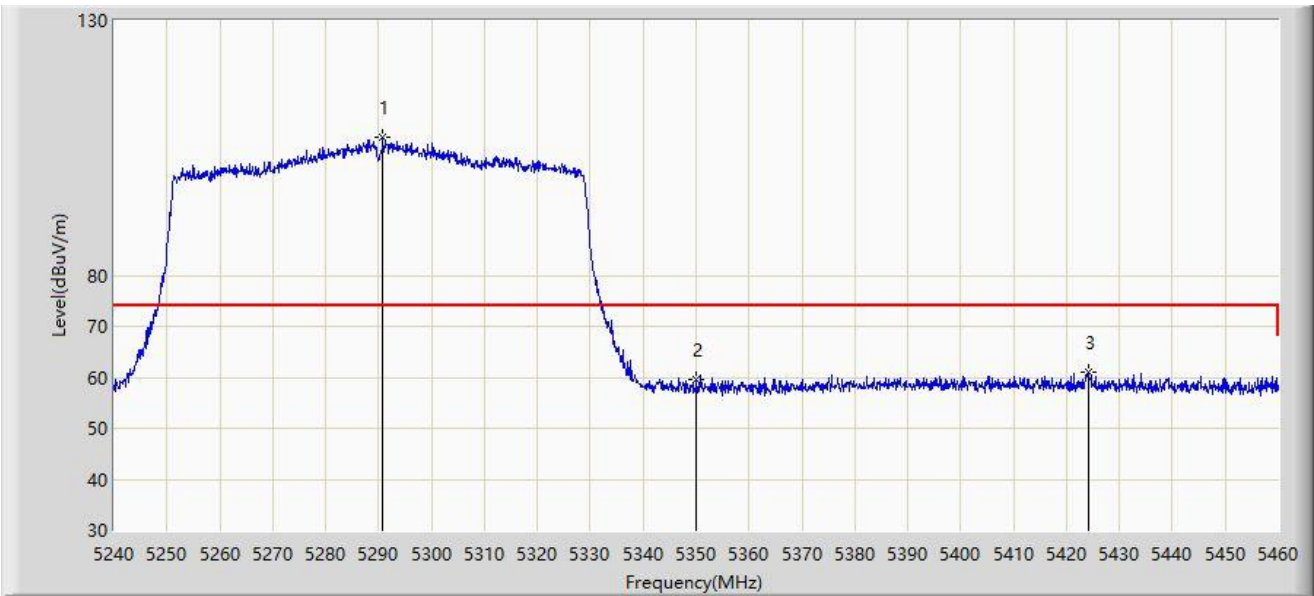


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5290.820	107.032	104.420	N/A	N/A	2.612	PK
2		5350.000	59.548	56.728	-14.452	74.000	2.820	PK
3	*	5424.030	60.920	57.600	-13.080	74.000	3.320	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

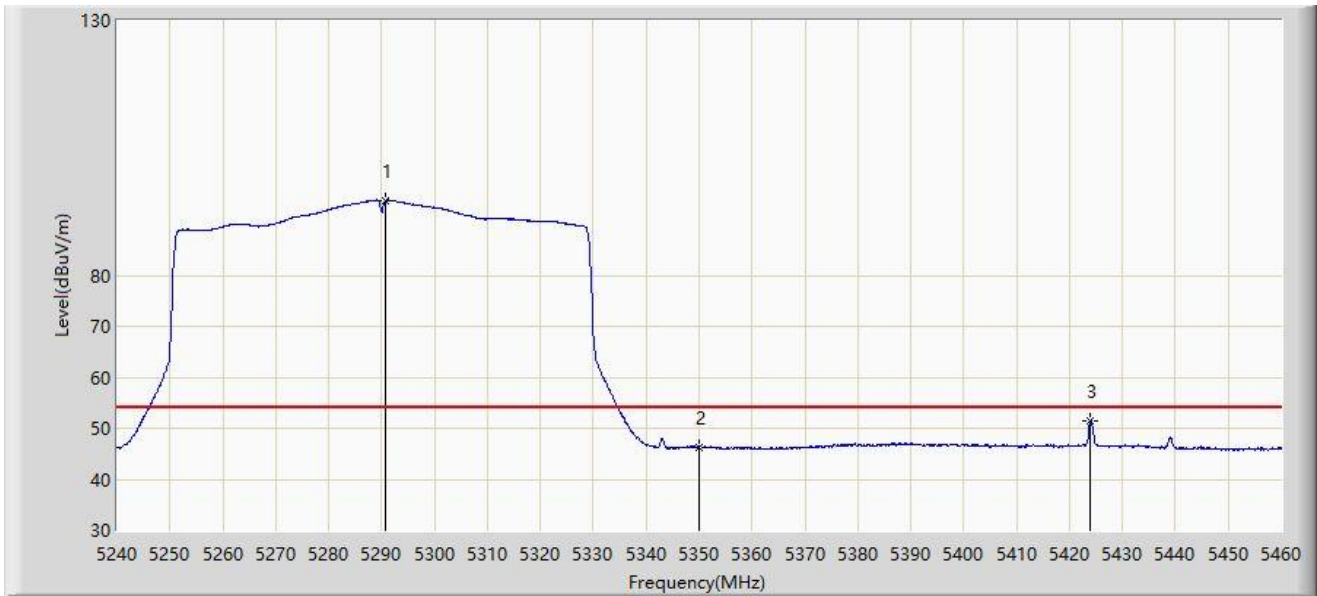


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5290.820	94.743	92.131	N/A	N/A	2.612	AV
2		5350.000	46.247	43.427	-7.753	54.000	2.820	AV
3	*	5423.920	51.467	48.146	-2.533	54.000	3.321	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

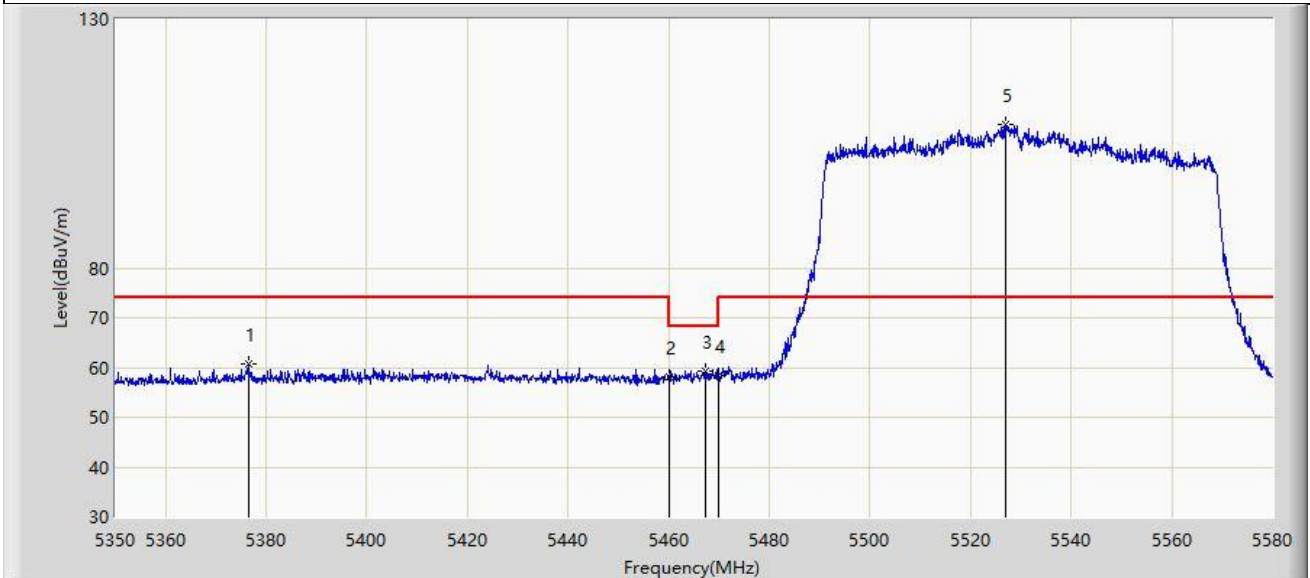


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5376.450	60.821	57.815	-13.179	74.000	3.007	PK
2		5460.000	58.103	54.954	-15.897	74.000	3.149	PK
3	*	5467.185	59.300	56.012	-8.900	68.200	3.288	PK
4		5470.000	58.410	55.068	-9.790	68.200	3.341	PK
5		5527.100	108.940	105.790	N/A	N/A	3.150	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

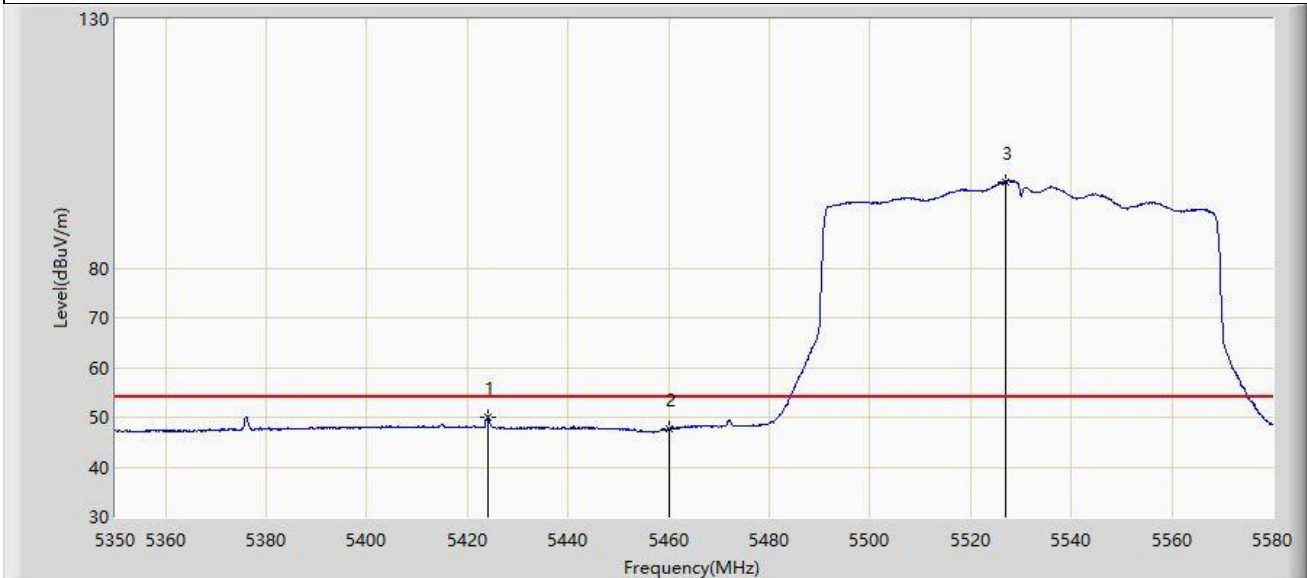


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5423.945	50.109	46.788	-3.891	54.000	3.321	AV
2		5460.000	47.579	44.430	-6.421	54.000	3.149	AV
3		5526.870	97.329	94.184	N/A	N/A	3.145	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

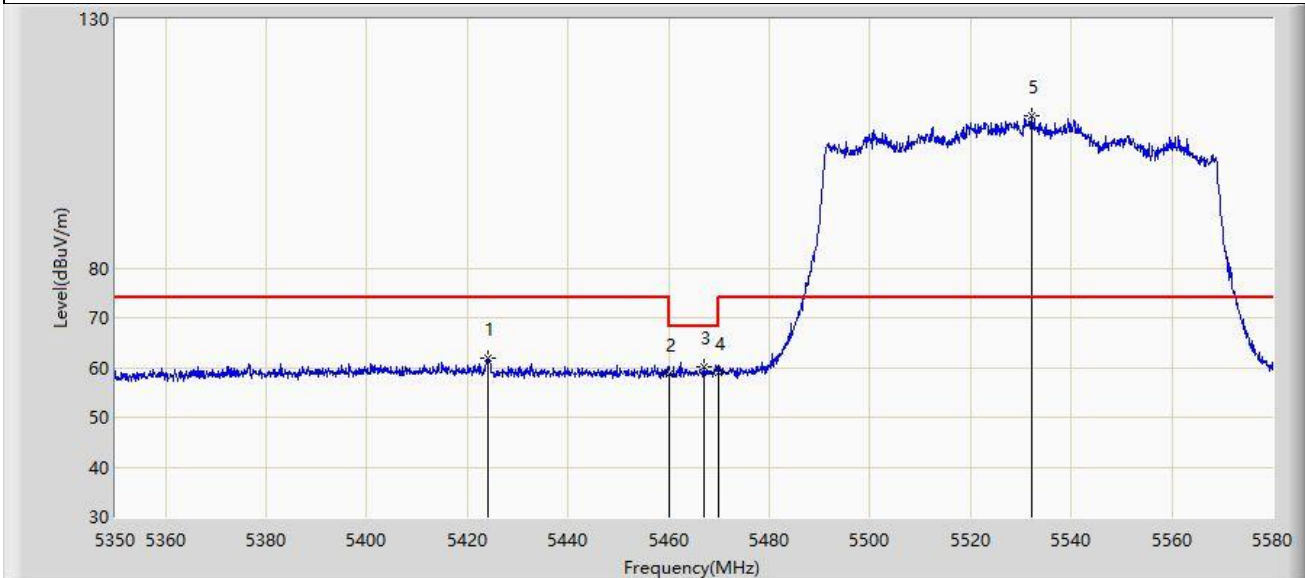


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5424.060	62.012	58.692	-11.988	74.000	3.320	PK
2		5460.000	58.802	55.653	-15.198	74.000	3.149	PK
3	*	5467.070	60.165	56.880	-8.035	68.200	3.286	PK
4		5470.000	59.094	55.752	-9.106	68.200	3.341	PK
5		5532.045	110.675	107.446	N/A	N/A	3.229	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

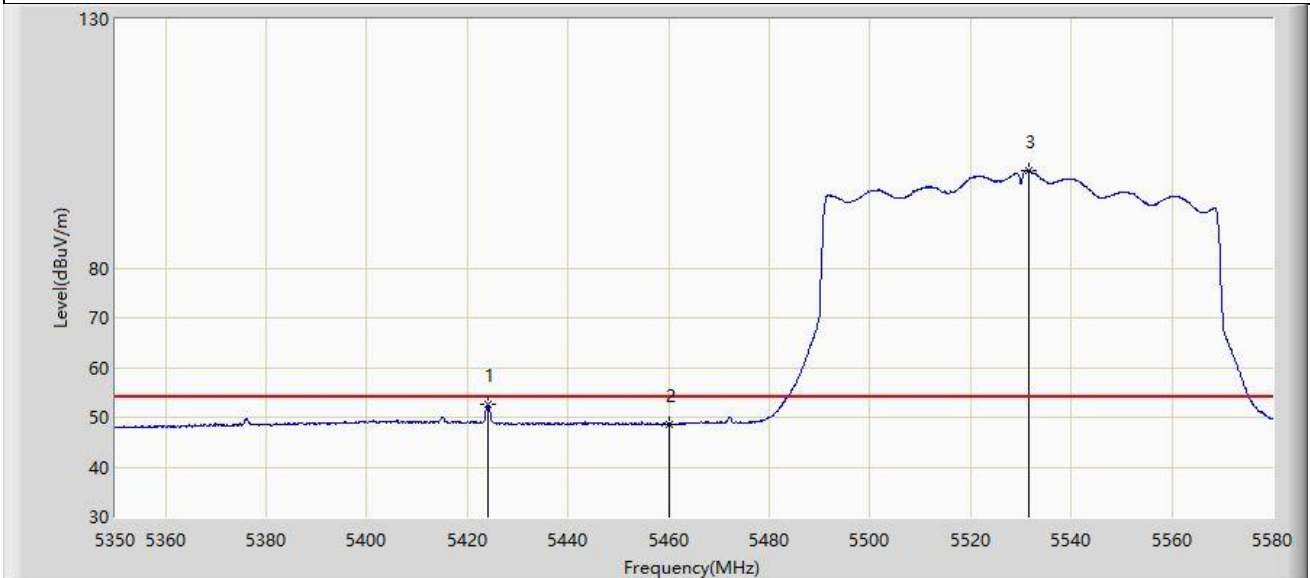


No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1	*	5424.060	52.582	49.262	-1.418	54.000	3.320	AV
2		5460.000	48.605	45.461	-5.395	54.000	3.143	AV
3		5531.585	99.571	96.348	N/A	N/A	3.222	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-04
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

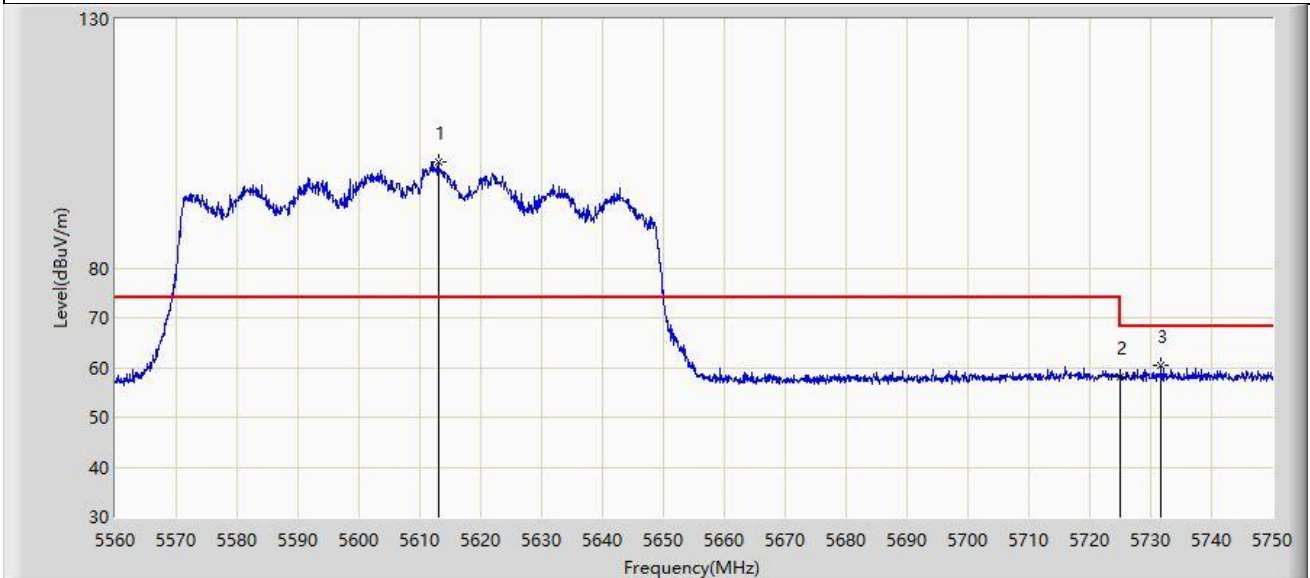


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5613.010	101.267	97.584	N/A	N/A	3.683	PK
2		5725.000	58.011	53.308	-10.189	68.200	4.703	PK
3	*	5731.760	60.402	55.789	-7.798	68.200	4.613	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-04
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

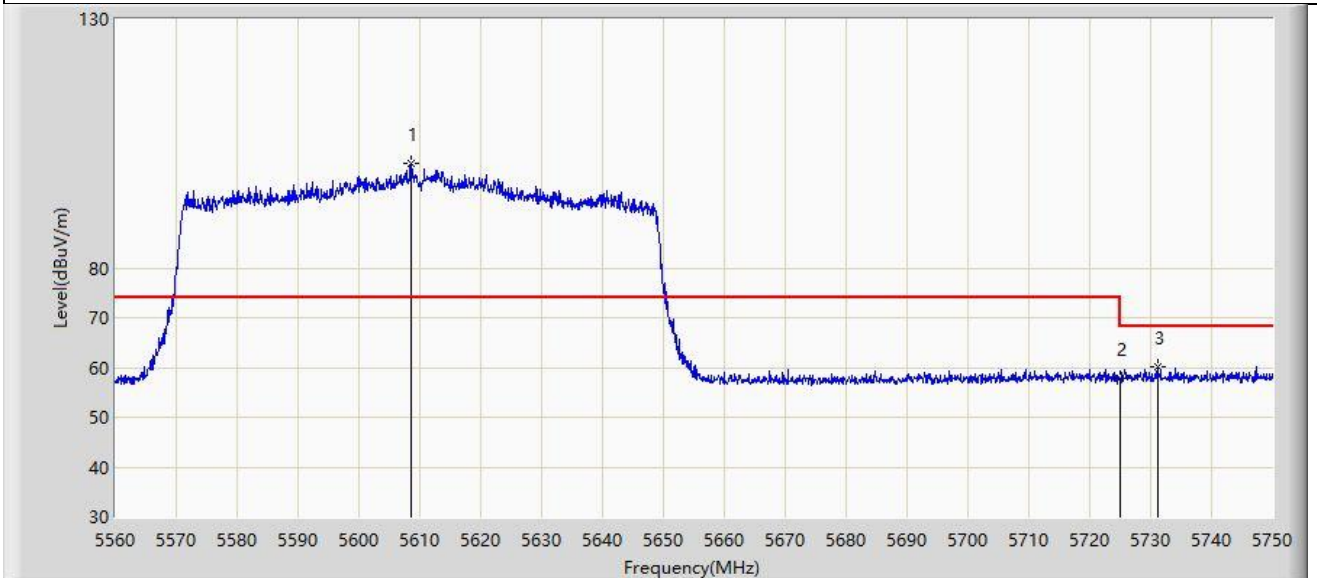


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5608.640	100.883	97.296	N/A	N/A	3.587	PK
2		5725.000	57.800	53.097	-10.400	68.200	4.703	PK
3	*	5731.095	60.104	55.479	-8.096	68.200	4.625	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

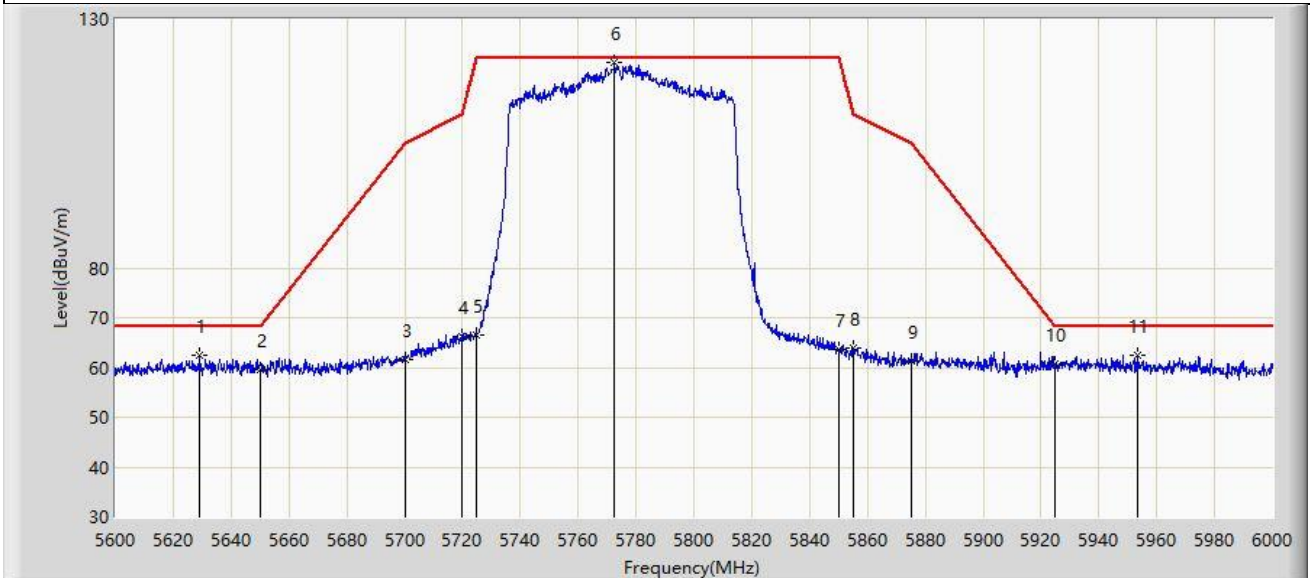


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5629.200	62.386	58.367	-5.814	68.200	4.019	PK
2		5650.000	59.699	55.576	-8.501	68.200	4.122	PK
3		5700.000	61.590	57.153	-43.610	105.200	4.437	PK
4		5720.000	66.123	61.459	-44.677	110.800	4.663	PK
5		5725.000	66.555	61.852	-55.645	122.200	4.703	PK
6		5772.600	121.386	116.570	N/A	N/A	4.815	PK
7		5850.000	63.765	58.782	-58.435	122.200	4.984	PK
8		5855.000	63.880	58.842	-46.920	110.800	5.038	PK
9		5875.000	61.395	56.264	-43.805	105.200	5.131	PK
10		5925.000	60.772	55.537	-7.428	68.200	5.236	PK
11	*	5953.600	62.466	57.096	-5.734	68.200	5.370	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-03-07
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

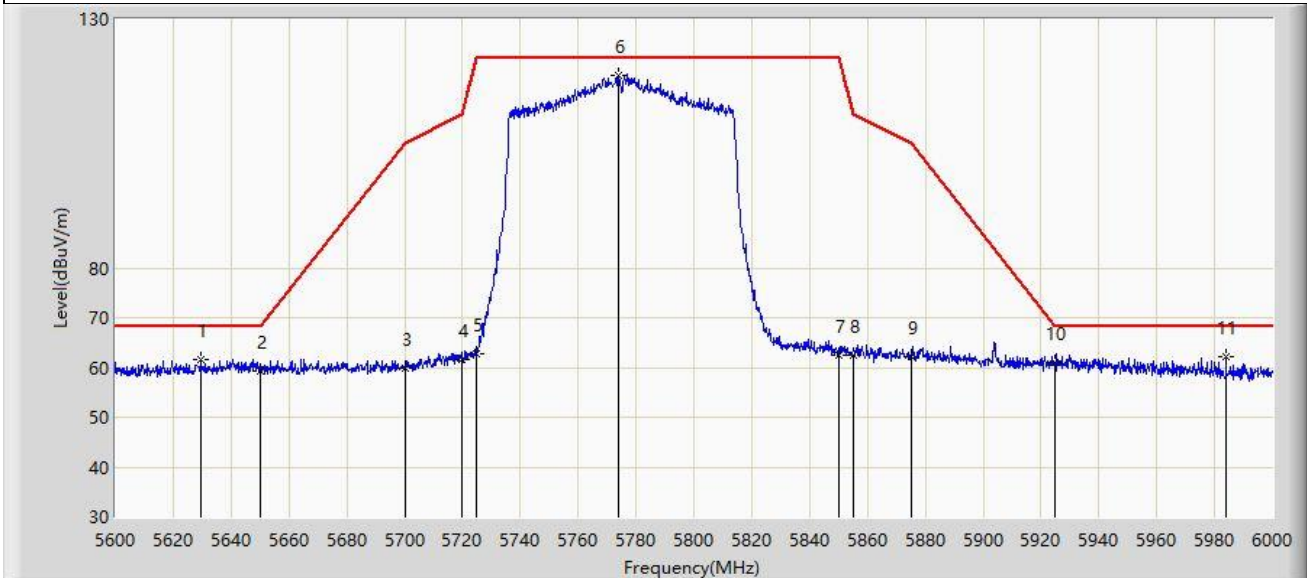


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5629.600	61.533	57.509	-6.667	68.200	4.024	PK
2		5650.000	59.143	55.020	-9.057	68.200	4.122	PK
3		5700.000	59.717	55.280	-45.483	105.200	4.437	PK
4		5720.000	61.732	57.068	-49.068	110.800	4.663	PK
5		5725.000	62.827	58.124	-59.373	122.200	4.703	PK
6		5773.800	118.666	113.832	N/A	N/A	4.835	PK
7		5850.000	62.591	57.608	-59.609	122.200	4.984	PK
8		5855.000	62.459	57.421	-48.341	110.800	5.038	PK
9		5875.000	62.250	57.119	-42.950	105.200	5.131	PK
10		5925.000	60.929	55.694	-7.271	68.200	5.236	PK
11	*	5984.000	62.073	56.812	-6.127	68.200	5.261	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

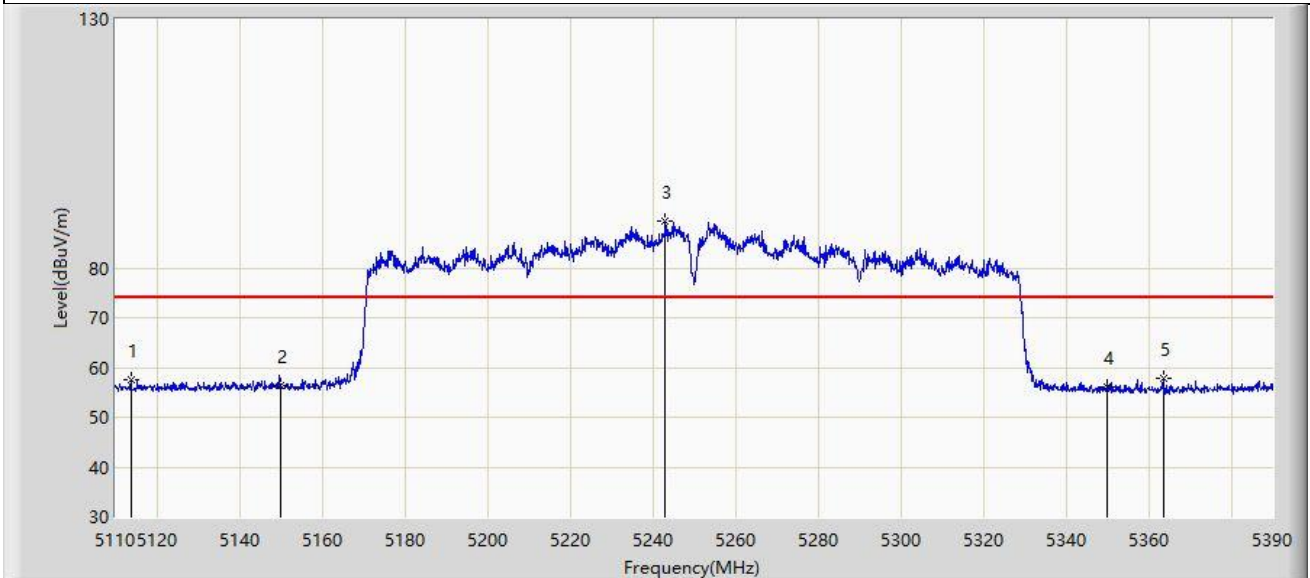


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5113.780	57.565	54.295	-16.435	74.000	3.270	PK
2		5150.000	56.455	52.973	-17.545	74.000	3.482	PK
3		5243.140	89.372	86.168	N/A	N/A	3.204	PK
4		5350.000	55.961	53.141	-18.039	74.000	2.820	PK
5	*	5363.540	57.750	54.912	-16.250	74.000	2.838	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

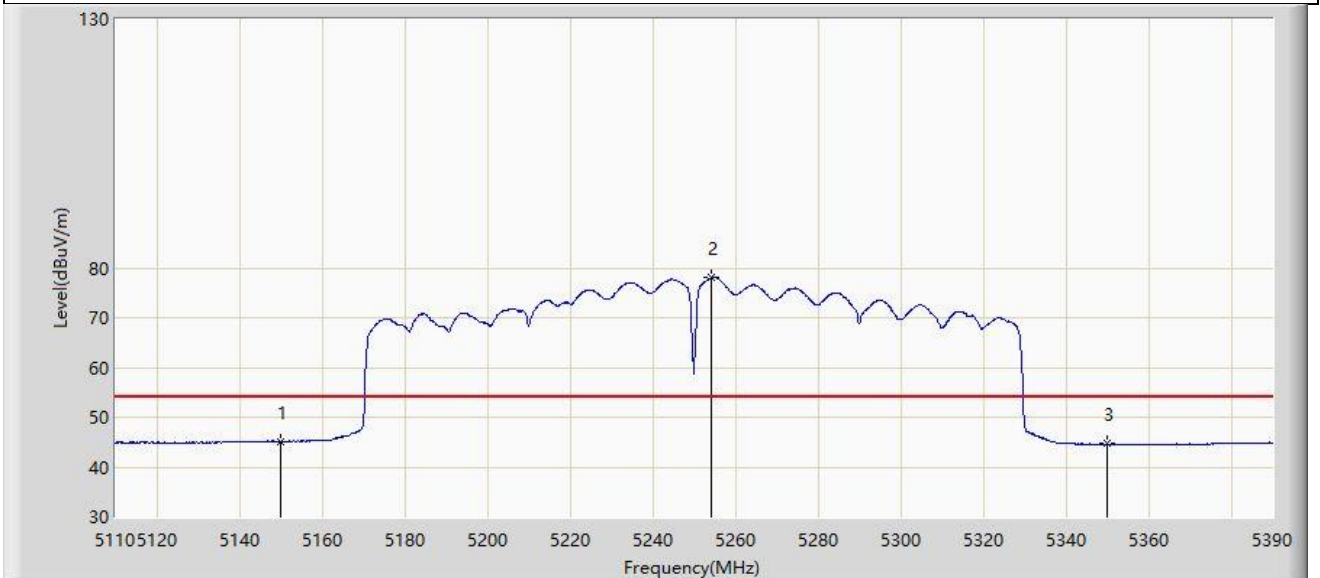


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	45.197	41.715	-8.803	54.000	3.482	AV
2		5254.200	78.019	74.924	N/A	N/A	3.095	AV
3		5350.000	44.641	41.821	-9.359	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

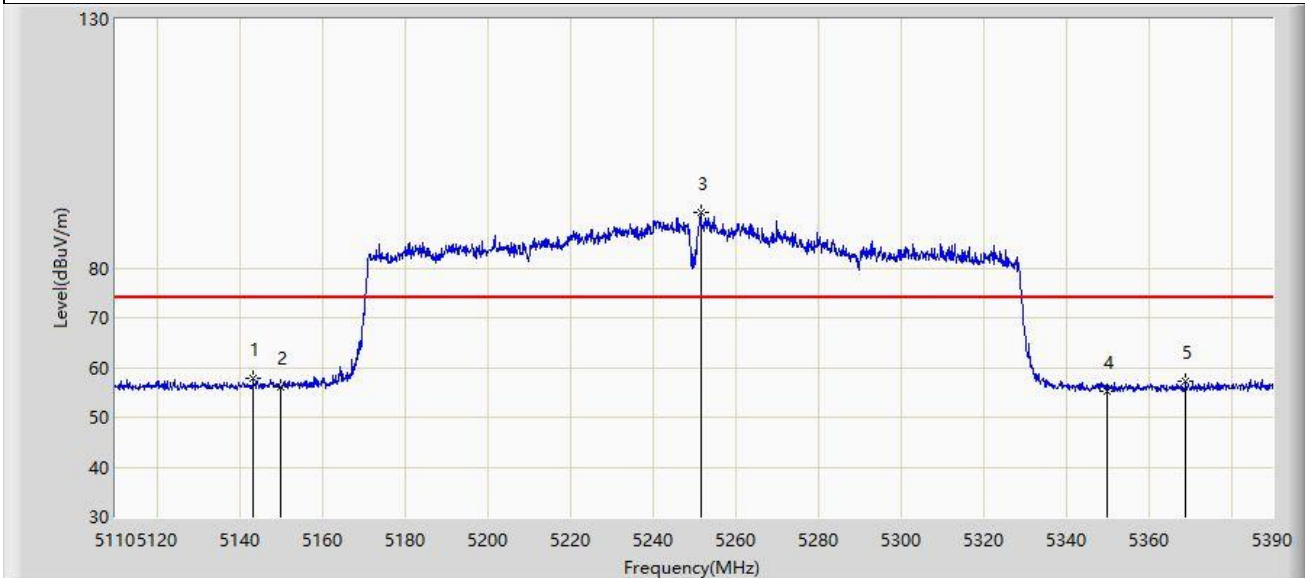


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5143.320	57.812	54.396	-16.188	74.000	3.417	PK
2		5150.000	56.037	52.555	-17.963	74.000	3.482	PK
3		5251.680	91.143	87.998	N/A	N/A	3.145	PK
4		5350.000	55.331	52.511	-18.669	74.000	2.820	PK
5		5369.000	57.296	54.435	-16.704	74.000	2.861	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

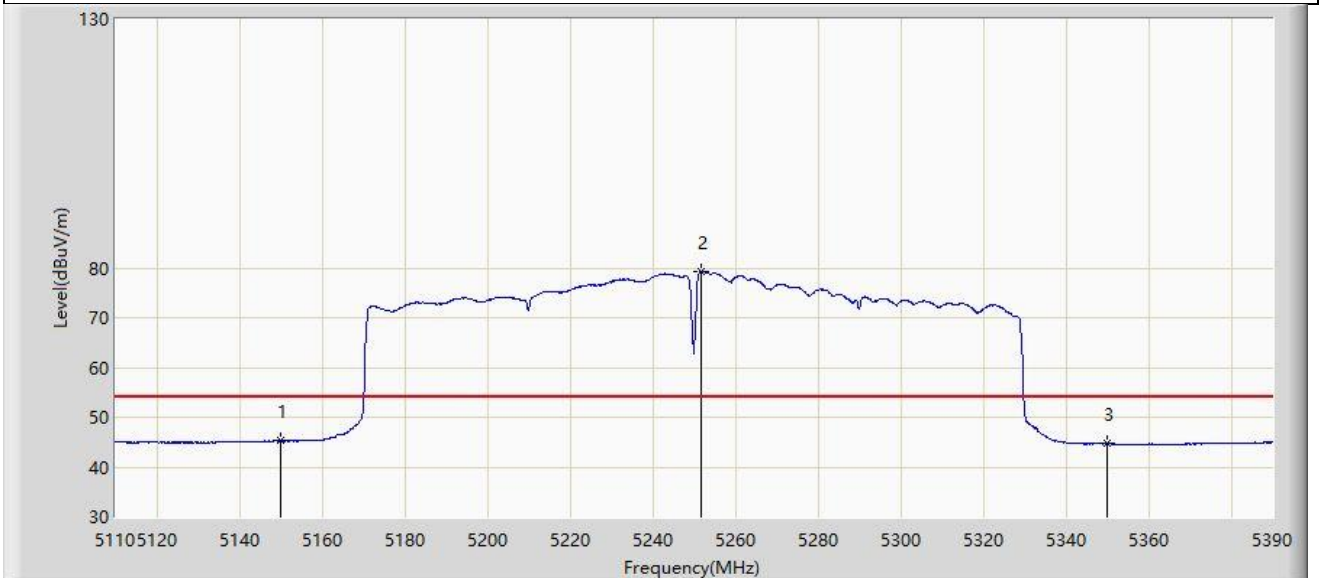


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	45.268	41.786	-8.732	54.000	3.482	AV
2		5251.820	79.264	76.121	N/A	N/A	3.142	AV
3		5350.000	44.657	41.837	-9.343	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

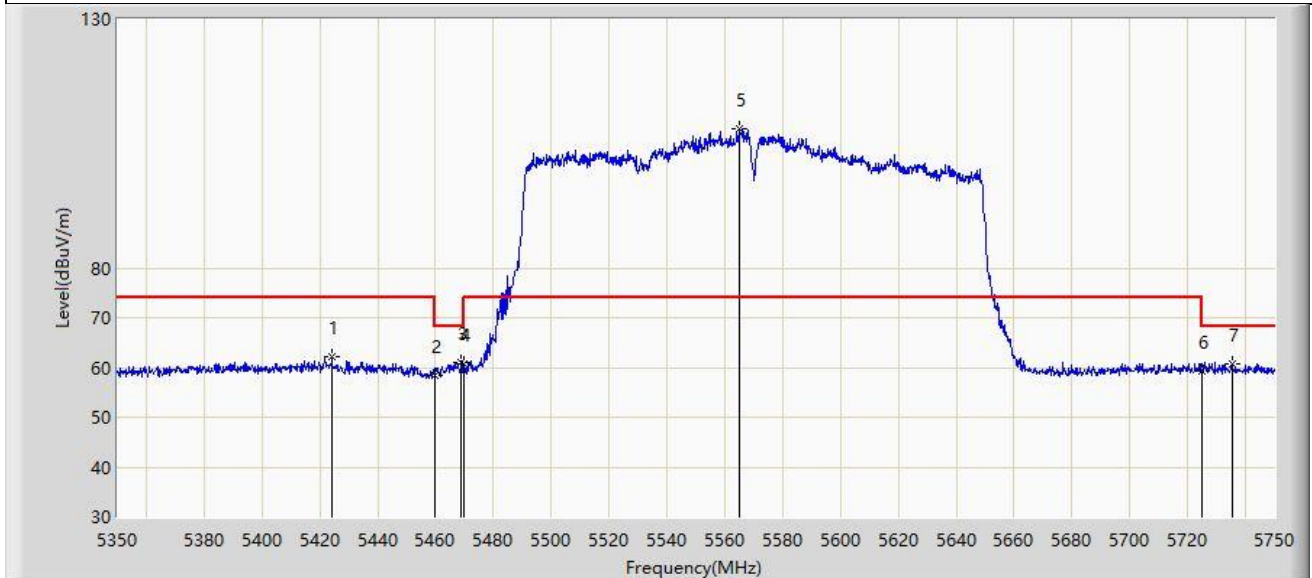


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5424.200	62.049	58.731	-11.951	74.000	3.318	PK
2		5460.000	58.266	55.117	-15.734	74.000	3.149	PK
3	*	5469.000	60.881	57.558	-7.319	68.200	3.323	PK
4		5470.000	60.616	57.274	-7.584	68.200	3.341	PK
5		5564.800	108.114	104.681	N/A	N/A	3.433	PK
6		5725.000	59.190	54.487	-9.010	68.200	4.703	PK
7		5735.400	60.662	56.113	-7.538	68.200	4.549	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

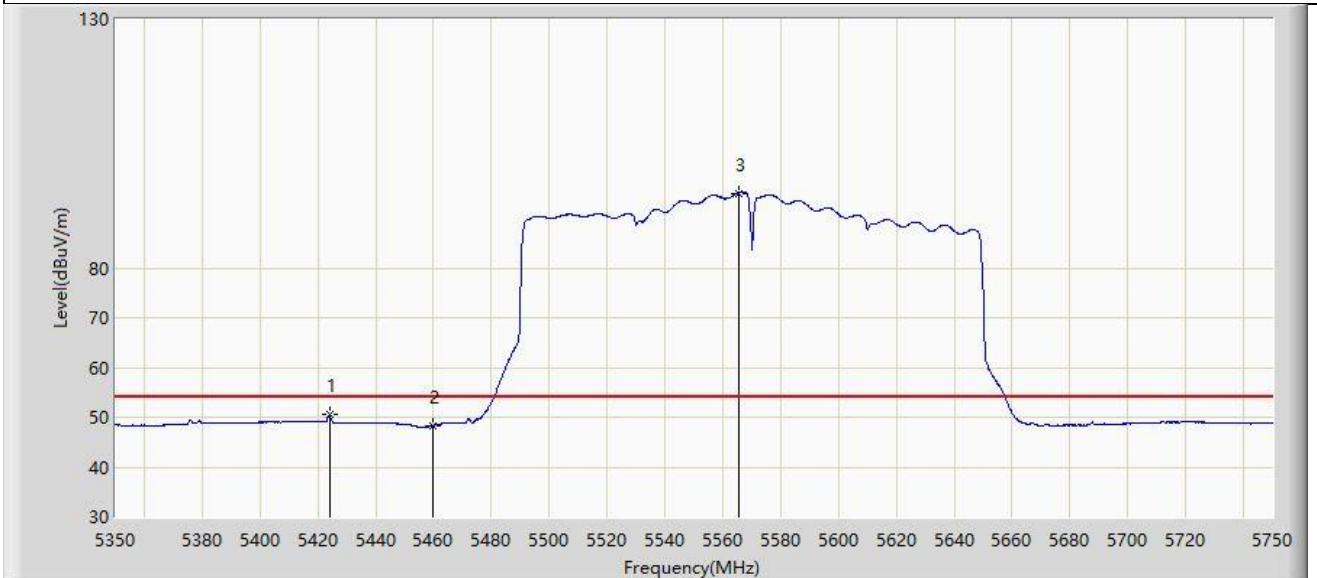


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5424.000	50.469	47.149	-3.531	54.000	3.321	AV
2		5460.000	48.356	45.207	-5.644	54.000	3.149	AV
3		5565.400	95.068	91.634	N/A	N/A	3.434	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

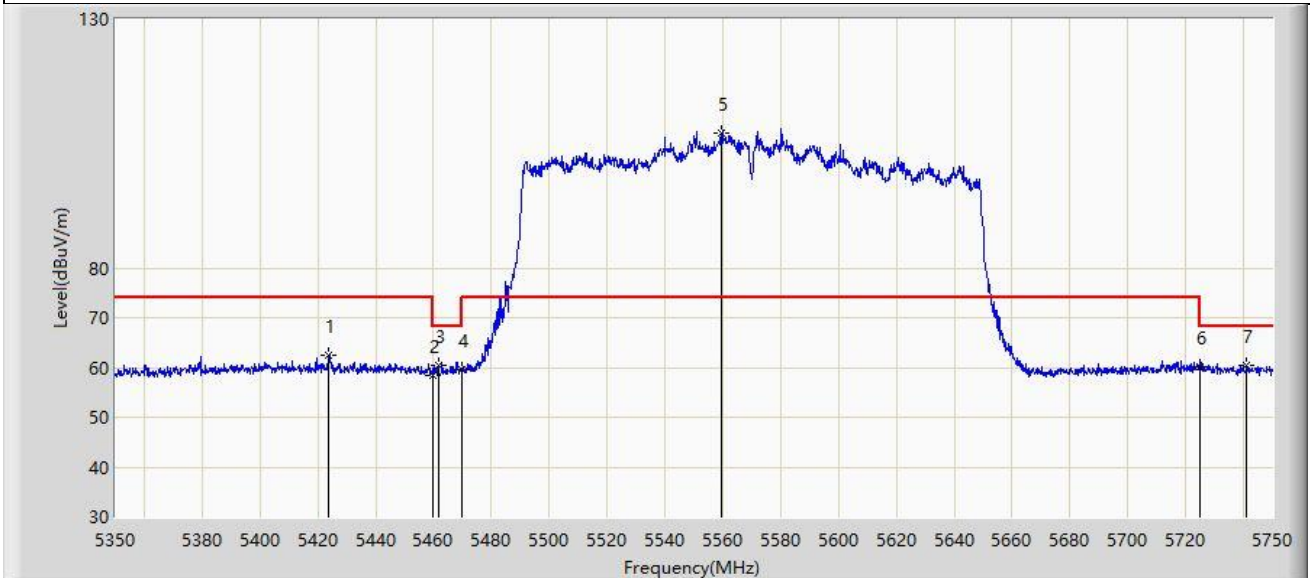


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5423.800	62.576	59.253	-11.424	74.000	3.323	PK
2		5460.000	58.423	55.274	-15.577	74.000	3.149	PK
3	*	5461.800	60.543	57.359	-7.657	68.200	3.184	PK
4		5470.000	59.544	56.202	-8.656	68.200	3.341	PK
5		5559.400	107.085	103.616	N/A	N/A	3.469	PK
6		5725.000	60.210	55.507	-7.990	68.200	4.703	PK
7		5741.200	60.507	56.061	-7.693	68.200	4.446	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

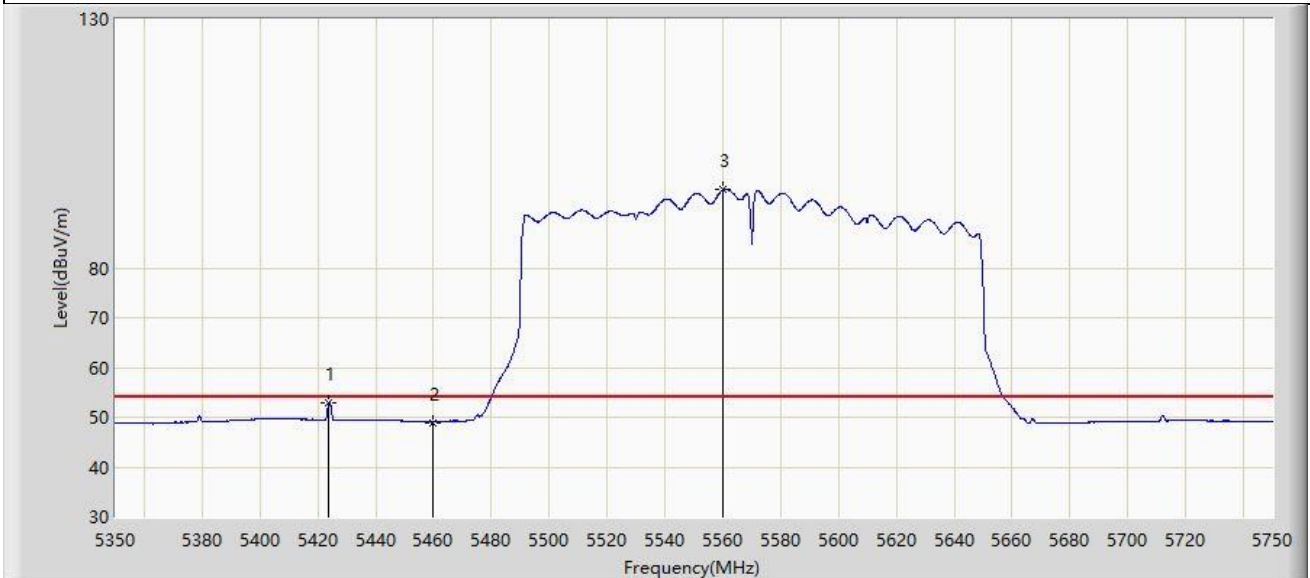

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5423.800	52.847	49.524	-1.153	54.000	3.323	AV
2		5460.000	48.979	45.830	-5.021	54.000	3.149	AV
3		5560.200	95.685	92.221	N/A	N/A	3.464	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Appendix B – Test Setup Photograph

Refer to “2308RSU088-UT” file.

Appendix C – EUT Photograph

Refer to “2308RSU088-UE” file.

————— The End —————