

Class 2 Permissive Change Engineering Test Report

FOR

Model: RBLDF-2nD

2412-2462 MHz

47CFR 15.247 and Industry Canada RSS-247

License Exempt Intentional Radiator

Broadband Digital Transmission System

FCC ID: TV7LDF2ND

IC: 7442A-LDF2ND

FOR

Mikrotikls SIA


Brivibas gatve 214i


Riga Latvia LV-1039

Test Report Number: 180702

FCC Designation: US5305

IC Test Site Registration: 3041A-1

Authorized Signatory: 
Scot D. Rogers



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Class 2 Permissive Change Engineering Test Report For

FOR
47 CFR, PART 15C - Intentional Radiators Paragraph 15.247
License Exempt Intentional Radiator

For
Mikrotiks SIA

Brivibas gatve 214i
Riga Latvia LV-1039

Model: RBLDF-2nD

Digital Transmission System

Frequency Range 2412-2462 MHz
FCC ID: TV7LDF2ND
IC: 7442A-LDF2ND

Test Date: July 2, 2018

Certifying Engineer: *Scot D. Rogers*
Scot D. Rogers
Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.
This report must not be used by the client to claim product certification, approval, or
endorsement by NVLAP, NIST, or any agency of the Federal Government.

Rogers Labs, Inc.	Mikrotiks SIA	S/N: 8D30082D7F29, 8D3008BD1801
4405 W. 259th Terrace	Model: RBLDF-2nD	FCC ID: TV7LDF2ND
Louisburg, KS 66053	Test #: 180702	IC: 7442A-LDF2ND
Phone/Fax: (913) 837-3214	Test to: CFR47 15C	Date: July 17, 2018
Revision 1	File: Mikrotik RBLDF2 C2PC TstRpt 180702	Page 2 of 21

Table Of Contents

TABLE OF CONTENTS.....	3
REVISIONS.....	4
FORWARD	5
OPINION / INTERPRETATION OF RESULTS	5
CHANGE TO EQUIPMENT FROM ORIGINAL DESIGN.....	5
EQUIPMENT TESTED.....	6
EQUIPMENT FUNCTION AND CONFIGURATION.....	6
Equipment Configuration.....	7
APPLICATION FOR CERTIFICATION.....	8
APPLICABLE STANDARDS & TEST PROCEDURES	9
EQUIPMENT TESTING PROCEDURES	9
Radiated Emission Test Procedure.....	9
Diagram 1 Test arrangement for radiated emissions	10
Diagram 2 Test arrangement for radiated emissions tested on Open Area Test Site (OATS).....	11
TEST SITE LOCATIONS	11
LIST OF TEST EQUIPMENT	12
UNITS OF MEASUREMENTS	13
ENVIRONMENTAL CONDITIONS.....	13
STATEMENT OF MODIFICATIONS AND DEVIATIONS	13
INTENTIONAL RADIATORS.....	13
Antenna Requirements	13
Operation in the 2400-2483.5 MHz Frequency Band.....	14

Transmitter Emissions Data.....15

 Table 1 Transmitter Radiated Emissions (Worst-case).....15

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator.....16

STATEMENT OF MODIFICATIONS AND DEVIATIONS 16

ANNEX..... 17

 Annex A Measurement Uncertainty Calculations.....18

 Annex B Rogers Labs Test Equipment List.....19

 Annex C Rogers Qualifications20

 Annex D Rogers Labs Certificate of Accreditation.....21

Revisions

Revision 1 Issued July 17, 2018

Forward

The following information is submitted as documentation of compliance with regulations supporting Class 2 Permissible Change of Authorized Equipment. This product was authorized under Digital transmission system equipment per 47 CFR Paragraph 15.247, Industry Canada RSS-247 Issue 2 and RSS-GEN, operating in the 2412 – 2462 MHz frequency band. The design was originally Granted as a stand-alone product which contains an integral antenna. The product authorization remains intact and this report documents using the product with an external reflective dish antenna with increased gain. This Class 2 Permissible Change request documents and supports demonstration of compliance when using the higher gain antenna system. The product remains electrically identical as no modifications to the product were performed or required.

Name of Applicant: Mikrotiks SIA
 Brivibas gatve 214i
 Riga Latvia LV-1039

Model: RBLDF-2nD

FCC ID: TV7LDF2ND

IC: 7442A-LDF2ND

Opinion / Interpretation of Results

Tests Performed	Results
Radiated Emissions	Complies

Change to Equipment from Original Design

This request addresses use with a high gain dish style antenna. The information contained in this report addresses radiated emissions measured when using the RBLDF-2nD mounted to a parabolic dish antenna providing gain of 25 dBi. No modification in the transmitter circuitry was required or performed. The transmitter remains electrically identical and functionally equivalent to the original equipment authorization.

Equipment Tested


<u>Equipment</u>	<u>Model</u>	<u>Serial Number</u>	<u>FCC I.D.</u>
EUT	RBLDF-2nD	8D30082D7F29	TV7LDF2ND
Dish Antenna	DS2076	DS10760219181246560029	N/A
AC Adapter	MLF-A001224003380FE0141	N/A	N/A
Power Adapter	POE	N/A	N/A
Dell Studio XPS	921LBN1	N/A	N/A

Test results in this report relate only to the items tested.

Equipment Function and Configuration

The EUT is a 2412-2462 MHz (Dual Chain (2 Tx chains) Multiple Input Multiple Out (MIMO) Digital Transmission System. The design provides operational capabilities across the 2412-2462 MHz Digital Transmissions System. The EUT offers broadband wireless connectivity to transmit and receive data. The design utilizes integral antenna system which was attached to the external Parabolic Dish Antenna. The EUT provides single communication interface port and requires power provided from Power Over Ethernet (POE) adapter. The design requires power provided using the included POE (Power Over Ethernet) adapter and AC/DC power supply. For testing purposes, the EUT was mounted on the Dish antenna and the transceiver was communicating to the laptop computer through the Ethernet network interface. The system was connected to and powered from the manufacturer supplied POE and AC/DC power supply. This configuration provided operational control of the EUT and communications over the network interface between the EUT and supporting computer system. The design provides no other interfacing options than those presented in this report. As requested by the manufacturer the equipment was tested for emissions compliance using the available configuration with the worst-case data presented. Test results in this report relate only to the products described in this report.

Equipment Configuration

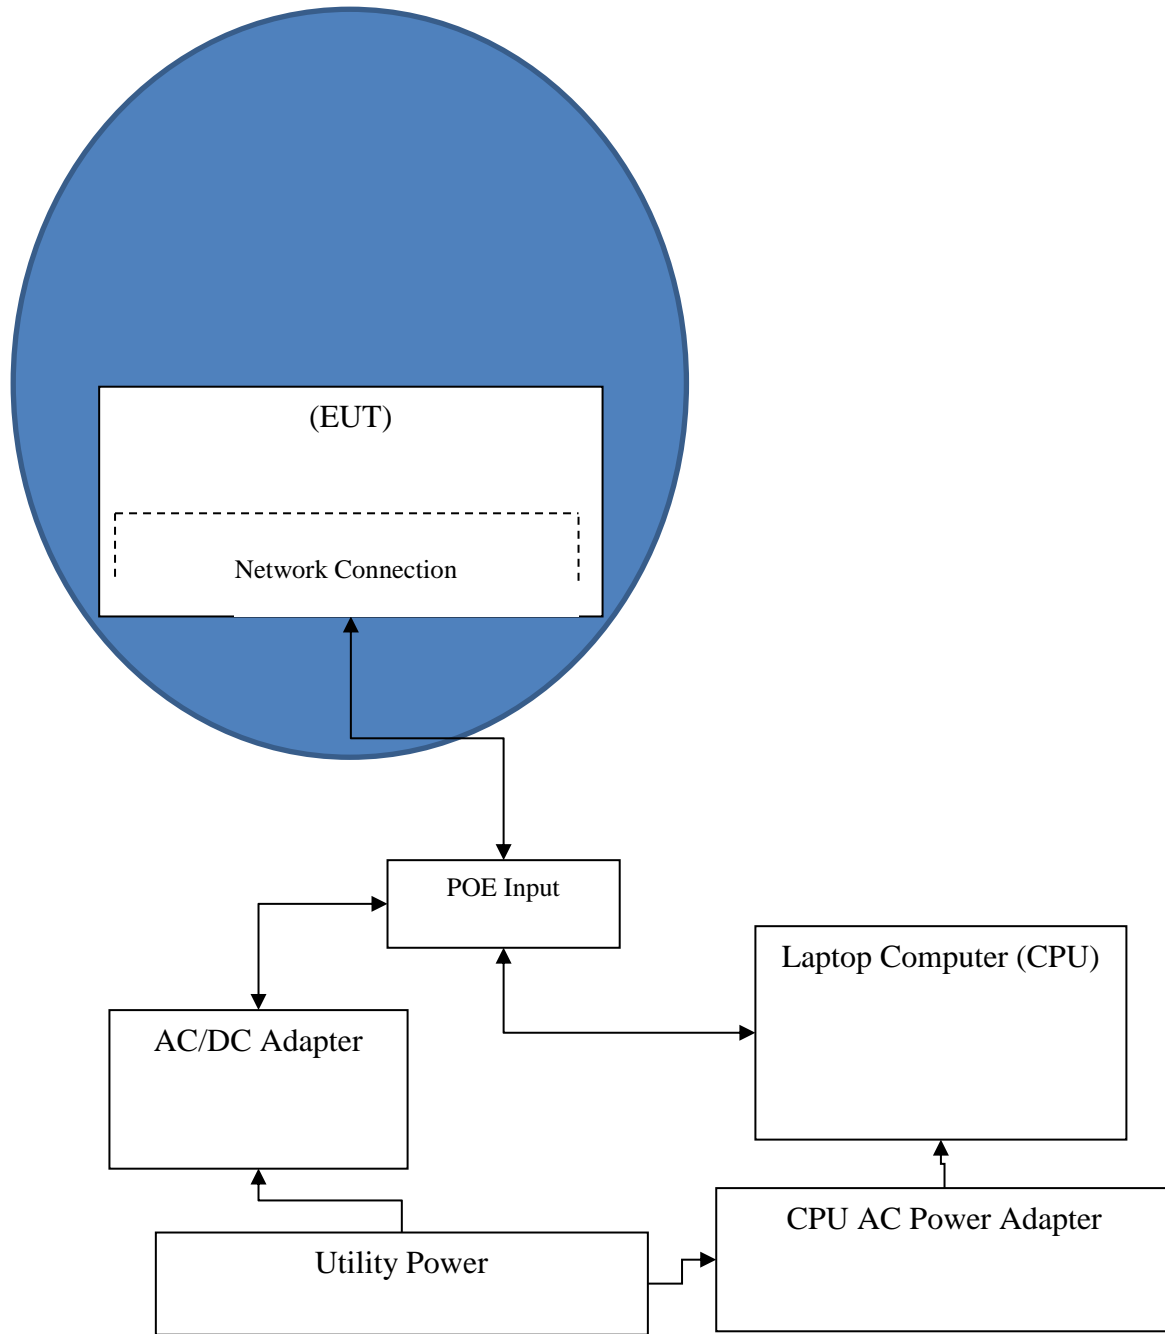

Application for Certification

- (1) Manufacturer: Mikrotikls SIA
Brivibas gatve 214i
Riga Latvia LV-1039
- (2) Identification: Model: RBLDF-2nD
FCC I.D.: TV7LDF2ND IC: 7442A-LDF2ND
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from power received from authorized AC/DC power adapter and POE. The EUT provides single Ethernet port for communications and power. During testing, the EUT was powered from the POE and AC/DC power supply and connected to CPU through a network cable.
- (9) Transition Provisions of 47CFR 15.37 are not requested
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. Not applicable to this filing.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.


Applicable Standards & Test Procedures

In accordance with the Federal Communications Code of Federal Regulations, Title 47 (47CFR) dated July 2, 2018: Part 2, Subpart J, Paragraphs 2.1043, applicable parts of paragraph 15C, KDB 178919 D01 Permissive Change Policy v06, Industry Canada RSP-100 Issue 11, RSS-247 Issue 2, and RSS-GEN Issue 5 operation in the 2400 – 2483.5 MHz Frequency band. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013.

Equipment Testing Procedures

Radiated Emission Test Procedure

The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. Radiated emissions testing was performed as required in the regulations and specified in ANSI C63.10-2013. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. The frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions during preliminary investigation. Refer to diagrams one and two showing typical test setup. Refer to photographs in the test setup exhibits for specific EUT placement during testing.

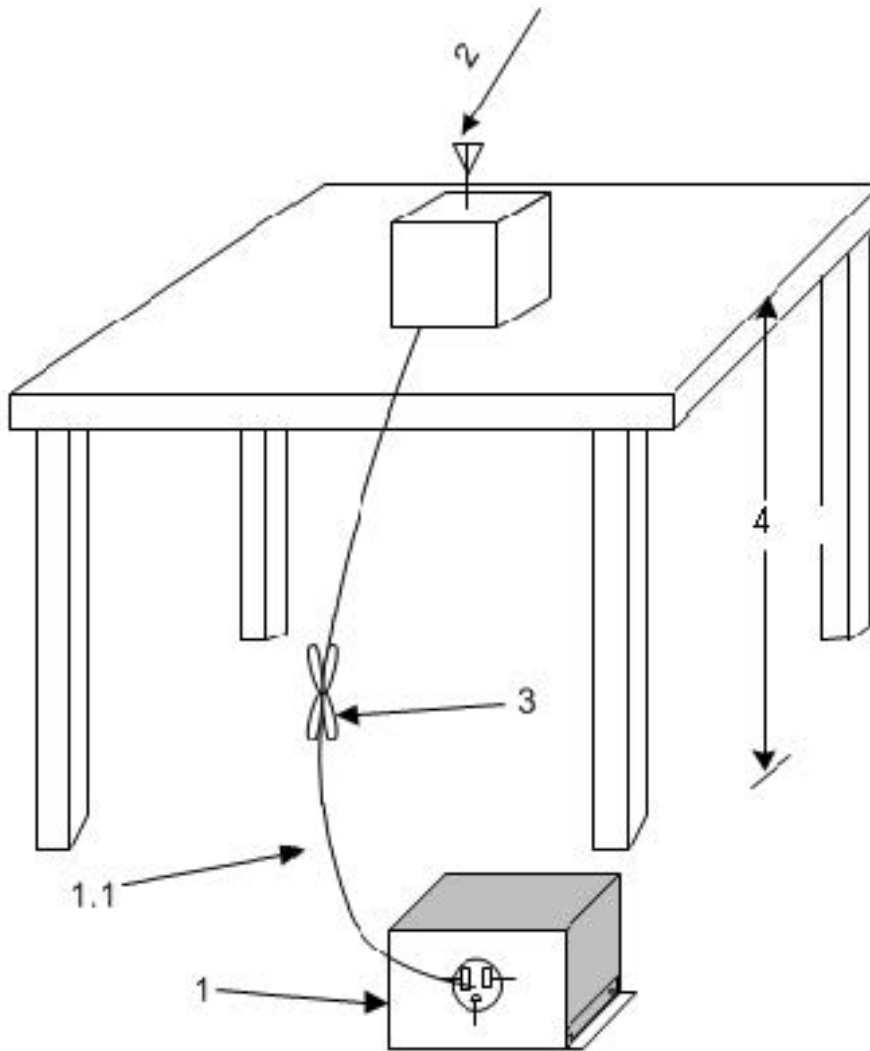

1—A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).


1.1—LISN spaced at least 80 cm from the nearest part of the EUT chassis.

2—Antenna can be integral or detachable, depending on the EUT (see 6.3.1).

3—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).

4—For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

Diagram 1 Test arrangement for radiated emissions

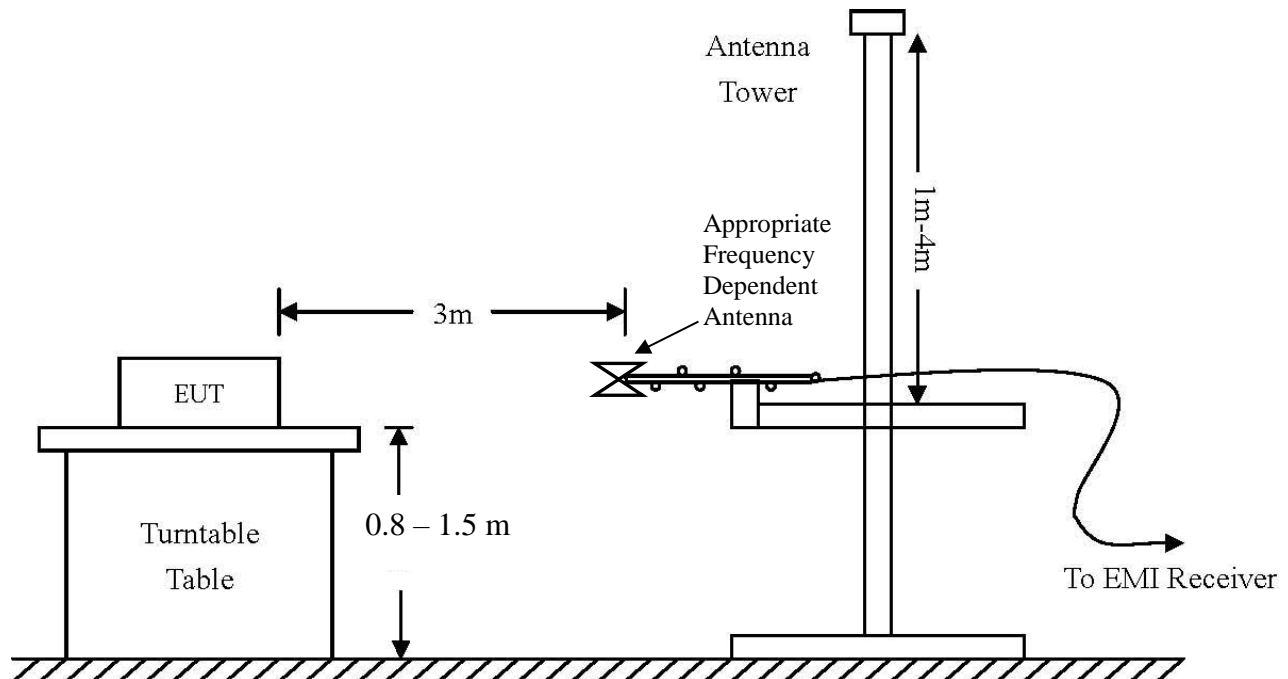

Radiated Emissions (9 kHz-30 MHz)		
RBW	Video. BW	Detector Function
9 kHz	30 kHz	Peak / Average
Radiated Emissions (30-1000 MHz)		
RBW	Video. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Radiated Emissions (Above 1000 MHz)		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

Diagram 2 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)

Test Site Locations

Antenna Port Conducted Antenna Port conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 West 259th Terrace, Louisburg, KS

Radiated EMI The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 West 259th Terrace, Louisburg, KS

Site Registration FCC Site Designation US5305, Industry Canada Registration: 3041A-1

NVLAP Accreditation Lab code 200087-0

Rogers Labs, Inc. Mikrotiks SIA S/N: 8D30082D7F29, 8D3008BD1801
 4405 W. 259th Terrace Model: RBLDF-2nD FCC ID: TV7LDF2ND
 Louisburg, KS 66053 Test #: 180702 IC: 7442A-LDF2ND
 Phone/Fax: (913) 837-3214 Test to: CFR47 15C Date: July 17, 2018
 Revision 1 File: Mikrotik RBLDF2 C2PC TstRpt 180702 Page 11 of 21

Units of Measurements

Conducted EMI Data is in dB μ V; dB referenced to one microvolt

Radiated EMI Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses

RFS (dB μ V/m @ 3m) = FSM (dB μ V) + A.F. (dB) - Gain (dB)

Environmental Conditions

Ambient Temperature 23.3° C

Relative Humidity 38%

Atmospheric Pressure 1015.6 mb

Statement of Modifications and Deviations

No modifications to the EUT were required during investigation for the equipment to demonstrate compliance with the 47CFR, Part 2.1043, Part 15C, Industry Canada RSS-247 Issue 2, and RSS-GEN Issue 5 emission requirements. There were no deviations to the specifications.

Intentional Radiators

The following information is submitted in support of demonstration of compliance with the requirements of 47CFR Parts 2 and 15C, Class 2 permissible change, Industry Canada RSP-100 Issue 11, RSS-247 Issue 2 and RSS-GEN Issue 5.

Antenna Requirements

The EUT incorporates integral antenna system. The design may optionally be placed on the external Parabolic Dish documented in this report which provides higher gain and directivity. The antenna connection point complies with the unique antenna connection requirements. The unique antenna connection requirements are fulfilled. There are no deviations or exceptions to the specification.

Operation in the 2400-2483.5 MHz Frequency Band

Radiated emissions were measured on the Open Area Test Site (OATS) at a three-meter distance. The production design RBLDF-2nD was mounted to the dish antenna during testing. Radiated emissions measurements were performed on the described configuration. Testing procedures defined in publication ANSI C63.10-2013 was used during compliance testing. The EUT was placed on a turntable elevated as required above the ground plane at a distance of 3 meters from the FSM antenna located on the OATS. The peak and quasi-peak amplitude of the frequencies below 1000 MHz were measured using a spectrum analyzer / EMC receiver. The peak and average amplitude of emissions above 1000 MHz were measured using a spectrum analyzer / EMC receiver. Emissions data was recorded from the measurement results. Data presented reflects measurement result corrected to account for measurement system gains and losses.

Transmitter Emissions Data

Table 1 Transmitter Radiated Emissions (Worst-case)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2412.0	106.1	102.6	105.1	101.9	-
4824.0	51.4	44.2	49.5	39.7	54.0
7236.0	50.7	38.0	51.0	38.0	54.0
9648.0	53.2	40.9	53.3	40.5	54.0
12060.0	56.2	43.4	56.1	43.2	54.0
14472.0	57.9	45.3	58.8	45.1	54.0
16884.0	60.0	47.6	60.4	47.0	54.0
2437.0	106.0	102.8	105.2	102.0	-
4874.0	50.2	40.9	48.1	36.5	54.0
7311.0	51.1	38.4	51.2	38.4	54.0
9748.0	52.7	40.1	53.3	40.0	54.0
12185.0	57.6	44.9	57.9	44.8	54.0
14622.0	59.7	46.5	59.2	46.3	54.0
17059.0	61.2	48.6	61.4	48.6	54.0
2462.0	107.1	103.9	105.6	102.3	-
4924.0	49.1	38.9	47.1	34.5	54.0
7386.0	51.7	38.4	51.2	38.4	54.0
9848.0	52.7	40.3	53.1	40.4	54.0
12310.0	57.9	45.0	57.8	44.9	54.0
14772.0	58.1	45.7	58.3	45.6	54.0
17234.0	61.4	48.4	61.1	48.3	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15.247 and Industry Canada RSS-247. The minimum radiated harmonic emission provided -5.4 dB margin below requirements. There were no other significantly measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. There were no other deviations or exceptions to the requirements.

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with the 47CFR Part 15C paragraph 15.247 and Industry Canada RSS-247 emissions requirements. There were no deviations or modifications to the specifications.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.14
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Rogers Labs Test Equipment List

List of Test Equipment	Calibration	Date (m/d/y)	Due
Antenna: Schwarzbeck Model: BBA 9106/VHBB 9124 (9124-627)		5/2/2018	5/2/2019
Antenna: Schwarzbeck Model: VULP 9118 A (VULP 9118 A-534)		5/2/2018	5/2/2019
Antenna: EMCO 6509		10/24/2016	10/24/2018
Antenna: EMCO 3143 (9607-1277) 20-1200 MHz		5/2/2018	5/2/2019
Antenna: EMCO Dipole Set 3121C		2/23/2018	2/23/2019
Antenna: C.D. B-101		2/23/2018	2/23/2019
Antenna: Solar 9229-1 & 9230-1		2/23/2018	2/23/2019
Cable: Belden 8268 (L3)		10/24/2017	10/24/2018
Cable: Time Microwave: 4M-750HF290-750		10/24/2017	10/24/2018
Frequency Counter: Leader LDC-825 (8060153)		5/2/2018	5/2/2019
Oscilloscope Scope: Tektronix 2230		2/23/2018	2/23/2019
Wattmeter: Bird 43 with Load Bird 8085		2/23/2018	2/23/2019
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140		2/23/2018	2/23/2019
R.F. Generator: SMB100A6 s/n 100623		5/2/2018	5/2/2019
R.F. Generator: SBMBV100A s/n: 260771		5/2/2018	5/2/2019
R.F. Generators: HP 606A, HP 8614A, HP 8640B		2/23/2018	2/23/2019
R.F. Power Amp 65W Model: 470-A-1010		2/23/2018	2/23/2019
R.F. Power Amp 50W M185- 10-501		2/23/2018	2/23/2019
R.F. Power Amp A.R. Model: 10W 1010M7		2/23/2018	2/23/2019
R.F. Power Amp EIN Model: A301		2/23/2018	2/23/2019
LISN: Compliance Eng. Model 240/20		5/2/2018	15/50/19
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08		5/2/2018	5/2/2019
Audio Oscillator: H.P. 201CD		2/23/2018	2/23/2019
ESD Test Set 2010i		2/23/2018	2/23/2019
Oscilloscope Scope: Tektronix MDO 4104		2/23/2018	2/23/2019
EMC Transient Generator HVT TR 3000		2/23/2018	2/23/2019
AC Power Source (Ametech, California Instruments)		2/23/2018	2/23/2019
Fast Transient Burst Generator Model: EFT/B-101		2/23/2018	2/23/2019
Field Intensity Meter: EFM-018		2/23/2018	2/23/2019
KEYTEK Ecat Surge Generator		2/23/2018	2/23/2019
ESD Simulator: MZ-15		2/23/2018	2/23/2019
Shielded Room not required			

Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 27 years' experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

Scot D. Rogers

Scot D. Rogers

Annex D Rogers Labs Certificate of Accreditation

<p>United States Department of Commerce National Institute of Standards and Technology</p> <p>NVLAP®</p> <hr/> <p>Certificate of Accreditation to ISO/IEC 17025:2005</p> <hr/> <p>NVLAP LAB CODE: 200087-0</p> <p>Rogers Labs, Inc. Louisburg, KS</p> <p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p> <p>Electromagnetic Compatibility & Telecommunications</p> <p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).</i></p> <hr/> <p>2018-02-21 through 2019-03-31 <i>Effective Dates</i></p> <p style="text-align: center;"></p> <p style="text-align: right;"> <i>For the National Voluntary Laboratory Accreditation Program</i></p>		
--	--	--

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Mikrotiks SIA
Model: RBLDF-2nD
Test #: 180702
Test to: CFR47 15C
File: Mikrotik RBLDF2 C2PC TstRpt 180702

S/N: 8D30082D7F29, 8D3008BD1801
FCC ID: TV7LDF2ND
IC: 7442A-LDF2ND
Date: July 17, 2018
Page 21 of 21