

**TEST REPORT ADDENDUM - CONDUCTED**

FROM



Test of: MikroTik RBLHGG-5aCD Wireless Module

To: FCC CFR 47 Part 15 Subpart E 15.407

Test Report Serial No.: MIKO60-U2\_Conducted Addendum Rev A

Issue Date: 23<sup>rd</sup> October 2017

Master Document Number	Addendum Reports
MIKO60-U2_Master	MIKO60-U2_Conducted
	MIKO60-U2_Radiated
	MIKO60-U2 (FCC Part 15B & ICES_003)



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 2 of 159

---

## Table of Contents

<b>1. TEST RESULTS .....</b>	<b>3</b>
1.1. Peak Transmit Power .....	3
1.2. 26 dB & 99% Bandwidth .....	13
1.3. 6 dB & 99% Bandwidth .....	18
1.4. Power Spectral Density .....	23
<b>A. APPENDIX - GRAPHICAL IMAGES .....</b>	<b>33</b>
A.1. 26 dB & 99% Bandwidth .....	34
A.2. 6 dB & 99% Bandwidth .....	52
A.3. Power Spectral Density .....	72

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



## 1. TEST RESULTS

### 1.1. Peak Transmit Power

Conducted Test Conditions for Maximum Conducted Output Power			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Maximum Conducted Output Power	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Maximum Conducted Output Power Measurement

Method PM (Measurement using an RF average power meter). KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate center frequency. All operational modes and frequency bands were measured independently and the resultant calculated. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported separately. A summation ( $\Sigma$ ) of each antenna port output power is provided which includes any offset due to Duty Cycle Correction Factor (DCCF). Testing was performed under ambient conditions at nominal voltage.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Supporting Information

Calculated Power =  $A + G + Y + 10 \log (1/x)$  dBm

A = Total Power [ $10 \cdot \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$ ]

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

#### Limits Maximum Conducted Output Power

##### Operating Frequency Band 5150-5250 MHz

15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 4 of 159

---

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Operating Frequency Band 5250-5350 and 5470 – 5725 MHz**

15. 407 (a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Operating Frequency Band 5725 – 5850 MHz**

15. 407 (a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 5 of 159

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5180.0	15.87	-3.24			15.93	--	27.00	-11.07	20.00
5200.0	16.88	-3.95			16.92	--	27.00	-10.08	21.00
5240.0	16.98	--3.95			17.02	--	27.00	-9.98	21.00

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 6 of 159

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	90.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5210.0	13.12	-6.89			13.16	--	27.00	-13.84	18.00

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 7 of 159

**Equipment Configuration for Peak Transmit Power**

<b>Variants:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5180.0	15.84	-3.28			15.88	--	27.00	-11.12	20.00
5200.0	16.81	-3.96			16.84	--	27.00	-11.16	21.00
5240.0	16.94	-3.43			16.98	--	27.00	-11.02	21.00

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 8 of 159

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5190.0	14.02	-5.78			14.07	--	27.00	-12.93	19.00
5230.0	16.19	-3.36			16.24	--	27.00	-10.76	21.00

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 9 of 159

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5745.0	18.11	2.60			18.23	--	27.00	-8.77	23.00
5785.0	17.76	1.79			17.87	--	27.00	-9.13	23.00
5825.0	16.78	0.08			16.87	--	27.00	-10.13	22.00

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 10 of 159

<b>Equipment Configuration for Peak Transmit Power</b>
--

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	90.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5775.0	16.45	0.10			16.55	--	27.00	-10.45	22.00

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 11 of 159

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5745.0	18.15	2.60			18.27	--	27.00	-8.73	23.00
5785.0	17.75	1.72			17.87	--	27.00	-9.13	23.00
5825.0	16.75	0.1			16.86	--	27.00	-10.14	22.00

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 12 of 159

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5755.0	16.19	3.36			16.24	--	27.00	-10.72	23.00
5795.0	16.16	-0.22			16.26	--	27.00	-10.74	22.00

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 13 of 159

## 1.2. 26 dB & 99% Bandwidth

Conducted Test Conditions for 26 dB and 99% Bandwidth			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	26 dB and 99 % Bandwidth	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		
<b>Test Procedure for 26 dB and 99% Bandwidth Measurement</b> The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.  Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 14 of 159

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5180.0	<a href="#">35.271</a>	<a href="#">42.806</a>			42.806	35.271		
5200.0	<a href="#">38.156</a>	<a href="#">41.683</a>			41.683	38.156		
5240.0	<a href="#">37.515</a>	<a href="#">43.447</a>			43.447	37.515		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5180.0	<a href="#">19.238</a>	<a href="#">28.537</a>			28.537	19.238		
5200.0	<a href="#">22.445</a>	<a href="#">27.415</a>			27.415	22.445		
5240.0	<a href="#">22.445</a>	<a href="#">29.659</a>			29.659	22.445		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 15 of 159

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	76.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5210.0	<a href="#">86.573</a>	<a href="#">89.579</a>			89.579	86.573		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5210.0	<a href="#">76.553</a>	<a href="#">76.553</a>			76.553	76.553		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 16 of 159

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5180.0	<a href="#">40.401</a>	<a href="#">46.974</a>			46.974	40.401		
5200.0	<a href="#">40.882</a>	<a href="#">44.409</a>			44.409	40.882		
5240.0	<a href="#">41.042</a>	<a href="#">47.615</a>			47.615	41.042		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5180.0	<a href="#">23.888</a>	<a href="#">31.904</a>			31.904	23.888		
5200.0	<a href="#">25.331</a>	<a href="#">30.140</a>			30.140	25.331		
5240.0	<a href="#">24.529</a>	<a href="#">32.866</a>			32.866	24.529		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 17 of 159

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	87.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5190.0	<a href="#">88.737</a>	<a href="#">108.216</a>			108.216	88.737		
5230.0	<a href="#">87.054</a>	<a href="#">101.723</a>			101.723	87.054		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5190.0	<a href="#">44.008</a>	<a href="#">62.525</a>			62.525	44.008		
5230.0	<a href="#">41.122</a>	<a href="#">57.475</a>			57.475	41.122		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 18 of 159

### 1.3. 6 dB & 99% Bandwidth

Conducted Test Conditions for 6 dB and 99% Bandwidth			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	6 dB and 99 % Bandwidth	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		
<b>Test Procedure for 6 dB and 99% Bandwidth Measurement</b> The bandwidth at 6 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. The Resolution Bandwidth was set to 100 kHz. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.  Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 19 of 159

**Equipment Configuration for 6 dB & 99% Bandwidth**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5745.0	<a href="#">16.270</a>	<a href="#">16.270</a>			16.270	16.270		
5785.0	<a href="#">16.270</a>	<a href="#">16.270</a>			16.270	16.270		
5825.0	<a href="#">16.270</a>	<a href="#">16.270</a>			16.270	16.270		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5745.0	<a href="#">32.562</a>	<a href="#">31.545</a>			32.562	31.545		
5785.0	<a href="#">32.157</a>	<a href="#">31.880</a>			32.157	31.880		
5825.0	<a href="#">32.588</a>	<a href="#">32.625</a>			32.625	32.588		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 20 of 159

**Equipment Configuration for 6 dB & 99% Bandwidth**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	90.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5775.0	<a href="#">73.600</a>	<a href="#">74.930</a>			74.930	73.600		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5775.0	<a href="#">137.504</a>	<a href="#">133.645</a>			137.504	133.645		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 21 of 159

**Equipment Configuration for 6 dB & 99% Bandwidth**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5745.0	<a href="#">17.530</a>	<a href="#">17.470</a>			17.530	17.470		
5785.0	<a href="#">17.470</a>	<a href="#">17.530</a>			17.530	17.470		
5825.0	<a href="#">17.470</a>	<a href="#">17.470</a>			17.470	17.470		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5745.0	<a href="#">33.076</a>	<a href="#">31.711</a>			33.076	31.711		
5785.0	<a href="#">32.721</a>	<a href="#">32.397</a>			32.721	32.397		
5825.0	<a href="#">33.339</a>	<a href="#">32.912</a>			33.339	32.912		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 22 of 159

**Equipment Configuration for 6 dB & 99% Bandwidth**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5755.0	<a href="#">35.070</a>	<a href="#">35.470</a>			35.470	35.070		
5795.0	<a href="#">35.470</a>	<a href="#">35.470</a>			35.470	35.470		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5755.0	<a href="#">63.479</a>	<a href="#">61.202</a>			63.479	61.202		
5795.0	<a href="#">62.305</a>	<a href="#">60.087</a>			62.305	60.087		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



## 1.4. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Power Spectral Density	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

### Test Procedure for Power Spectral Density

The in-band power spectral density was measured using the test technique specified in KDB 789033. A 1 MHz measurement bandwidth was implemented for the analyzer sweep. Once the sweep is complete the analyzer trace data is downloaded and used for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed ( $\hat{a}$ ) and a link to this additional graphic is provided.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

NOTE: It may be observed that spectrum in some plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

### Supporting Information

Calculated Power =  $A + 10 \log(1/x)$  dBm

$A$  = Total Power Spectral Density [ $10^{\log_{10}}(10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$ ]

$x$  = Duty Cycle

### Limits Power Spectral Density

#### Operating Frequency Band 5150-5250 MHz

15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 24 of 159

---

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Operating Frequency Band 5250-5350 and 5470 – 5725 MHz**

##### **15.407 (a)(2)**

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Operating Frequency Band 5725 – 5850 MHz**

##### **15.407 (a)(3)**

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 25 of 159

**Equipment Configuration for Power Spectral Density**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5180.0	<a href="#">6.686</a>	<a href="#">-18.658</a>			<a href="#">6.741</a>	14.0	-7.3
5200.0	<a href="#">8.251</a>	<a href="#">-18.005</a>			<a href="#">8.303</a>	14.0	-5.7
5240.0	<a href="#">9.319</a>	<a href="#">-16.880</a>			<a href="#">9.372</a>	14.0	-4.6

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 26 of 159

**Equipment Configuration for Power Spectral Density**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	90.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.46 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5210.0	<a href="#">2.370</a>	<a href="#">-23.709</a>			<a href="#">2.836</a>	14.0	-11.2

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 27 of 159

**Equipment Configuration for Power Spectral Density**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5180.0	<a href="#">8.568</a>	<a href="#">-19.179</a>			<a href="#">8.619</a>	14.0	-5.4
5200.0	<a href="#">8.346</a>	<a href="#">-18.405</a>			<a href="#">8.398</a>	14.0	-5.6
5240.0	<a href="#">9.033</a>	<a href="#">-17.121</a>			<a href="#">9.087</a>	14.0	-4.9

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 28 of 159

**Equipment Configuration for Power Spectral Density**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5190.0	<a href="#">4.705</a>	<a href="#">-22.110</a>			<a href="#">4.756</a>	14.0	-9.3
5230.0	<a href="#">5.071</a>	<a href="#">-21.072</a>			<a href="#">5.125</a>	14.0	-8.9

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 29 of 159

**Equipment Configuration for Power Spectral Density**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/500 KHz)						
MHz	a	b	c	d	dBm/500 KHz	dBm/500 KHz	dB
5745.0	<a href="#">6.673</a>	<a href="#">-12.784</a>			<a href="#">9.711</a>	27.0	-17.3
5785.0	<a href="#">6.844</a>	<a href="#">-11.471</a>			<a href="#">9.862</a>	27.0	-17.1
5825.0	<a href="#">6.599</a>	<a href="#">-11.555</a>			<a href="#">9.427</a>	27.0	-17.6

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 30 of 159

**Equipment Configuration for Power Spectral Density**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	90.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.46 dB)	Limit	Margin
	Port(s) (dBm/500 KHz)						
MHz	a	b	c	d	dBm/500 KHz	dBm/500 KHz	dB
5775.0	<a href="#">0.338</a>	<a href="#">-18.238</a>			<a href="#">6.853</a>	27.0	-20.2

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 31 of 159

**Equipment Configuration for Power Spectral Density**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/500 KHz)						
MHz	a	b	c	d	dBm/500 KHz	dBm/500 KHz	dB
5745.0	<a href="#">6.069</a>	<a href="#">-13.314</a>			<a href="#">9.102</a>	27.0	-17.9
5785.0	<a href="#">6.389</a>	<a href="#">-12.045</a>			<a href="#">9.412</a>	27.0	-17.6
5825.0	<a href="#">5.970</a>	<a href="#">-11.841</a>			<a href="#">8.795</a>	27.0	-18.2

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 32 of 159

**Equipment Configuration for Power Spectral Density**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/500 KHz)						
MHz	a	b	c	d	dBm/500 KHz	dBm/500 KHz	dB
5755.0	<a href="#">2.193</a>	<a href="#">-17.031</a>			<a href="#">5.322</a>	27.0	-21.7
5795.0	<a href="#">2.739</a>	<a href="#">-15.677</a>			<a href="#">5.752</a>	27.0	-21.3

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 33 of 159

---


## **A. APPENDIX - GRAPHICAL IMAGES**

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### A.1. 26 dB & 99% Bandwidth

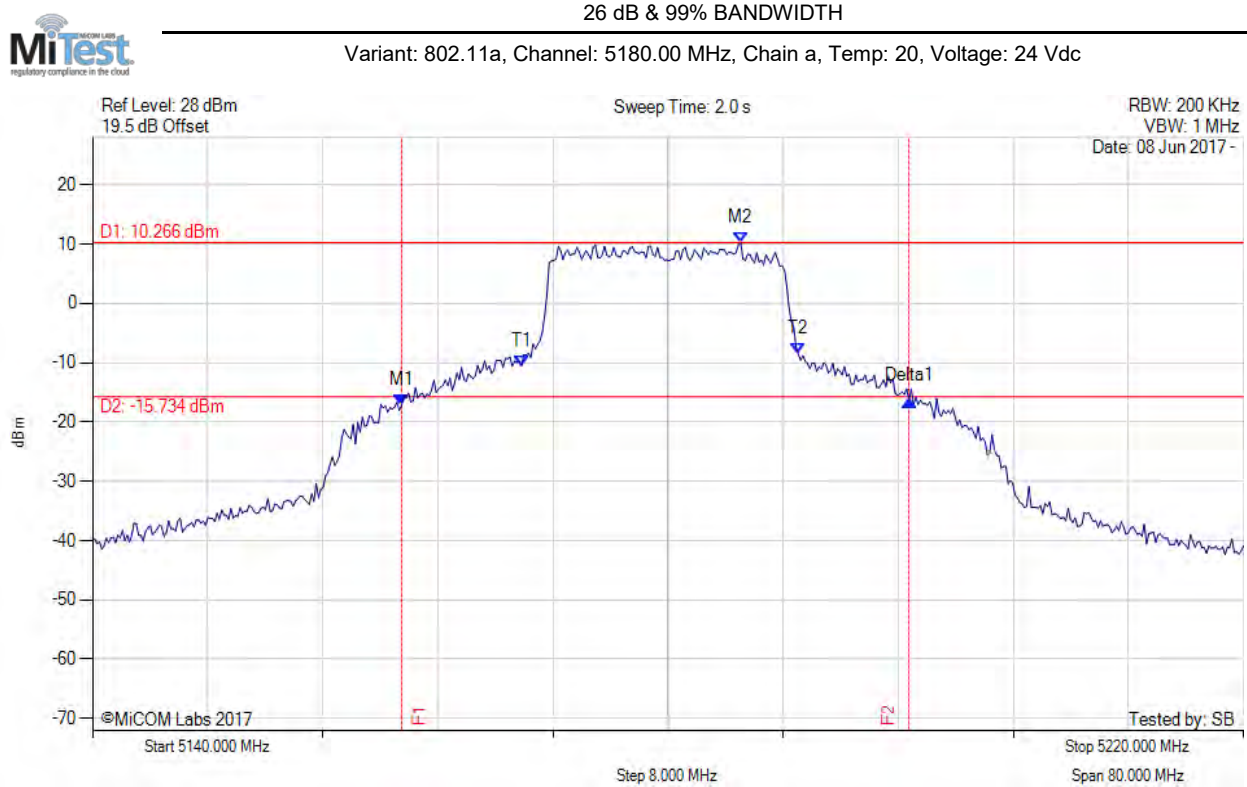

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5161.483 MHz : -17.200 dBm M2 : 5185.050 MHz : 10.266 dBm Delta1 : 35.271 MHz : 0.807 dB T1 : 5169.820 MHz : -10.521 dBm T2 : 5189.058 MHz : -8.585 dBm OBW : 19.238 MHz	Measured 26 dB Bandwidth: 35.271 MHz Measured 99% Bandwidth: 19.238 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variat: 802.11a, Channel: 5180.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

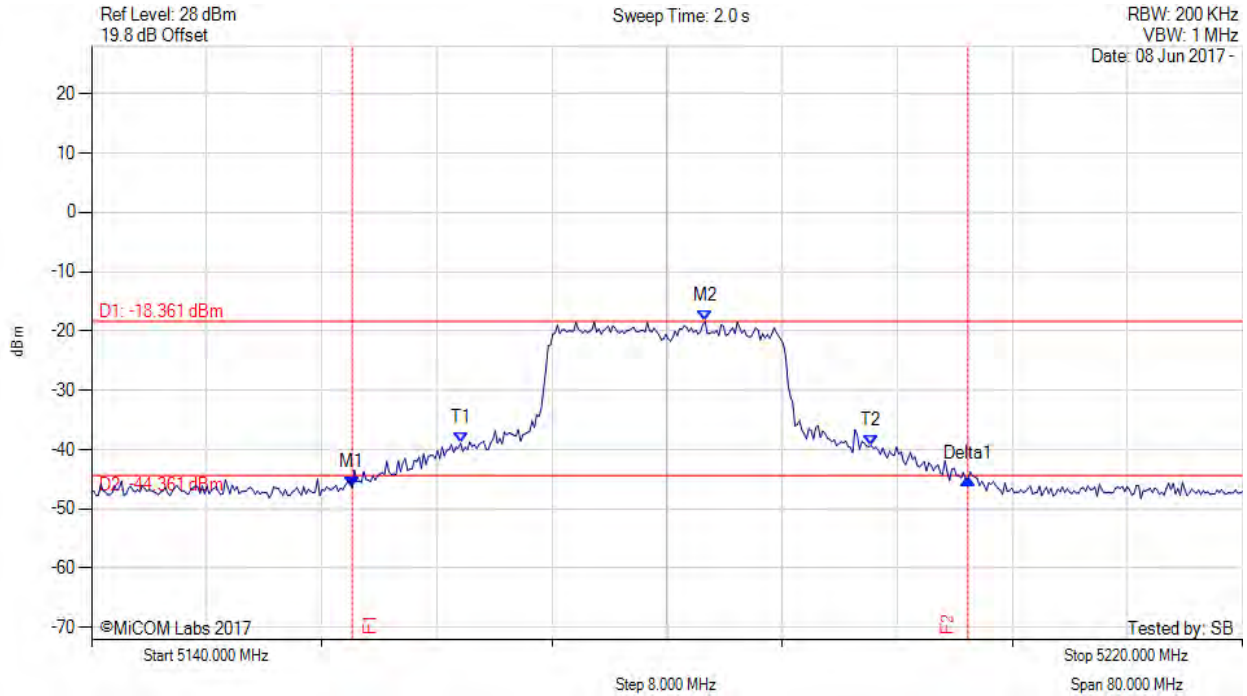

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5158.116 MHz : -46.437 dBm M2 : 5182.645 MHz : -18.361 dBm Delta1 : 42.806 MHz : 1.481 dB T1 : 5165.651 MHz : -38.918 dBm T2 : 5194.188 MHz : -39.313 dBm OBW : 28.537 MHz	Measured 26 dB Bandwidth: 42.806 MHz Measured 99% Bandwidth: 28.537 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variat: 802.11a, Channel: 5200.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

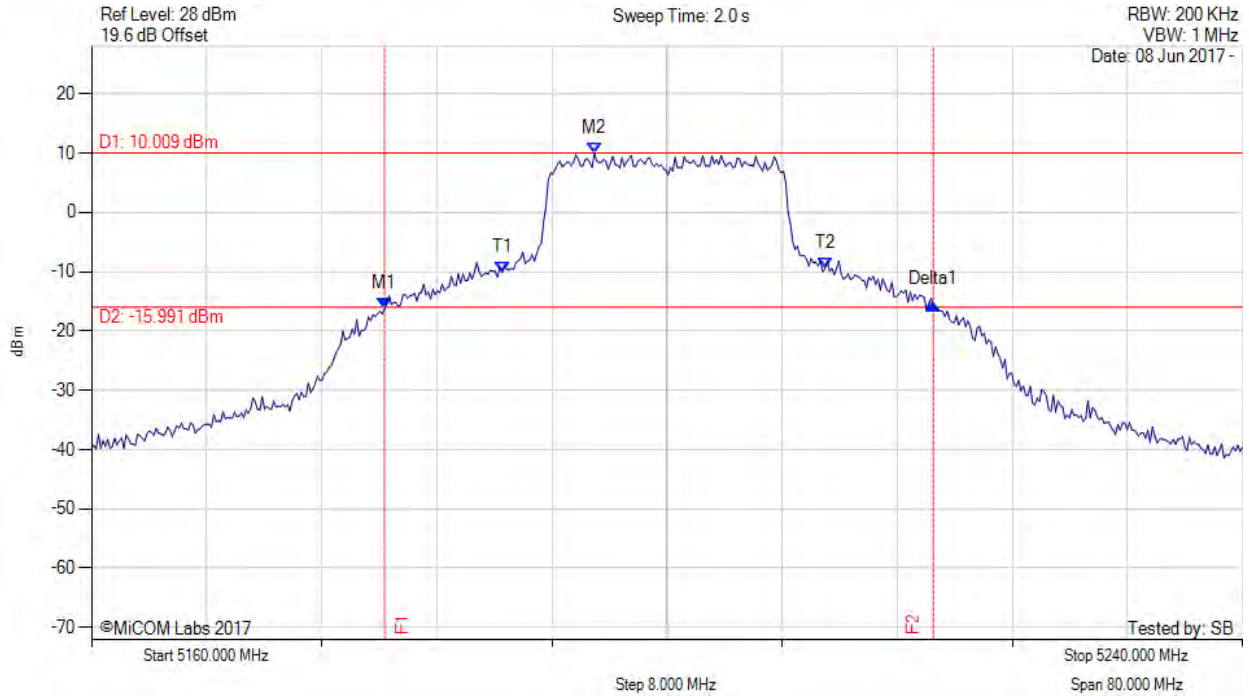

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5180.361 MHz : -16.291 dBm M2 : 5194.950 MHz : 10.009 dBm Delta1 : 38.156 MHz : 0.700 dB T1 : 5188.537 MHz : -10.147 dBm T2 : 5210.982 MHz : -9.486 dBm OBW : 22.445 MHz	Measured 26 dB Bandwidth: 38.156 MHz Measured 99% Bandwidth: 22.445 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 37 of 159



26 dB & 99% BANDWIDTH

Variants: 802.11a, Channel: 5200.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

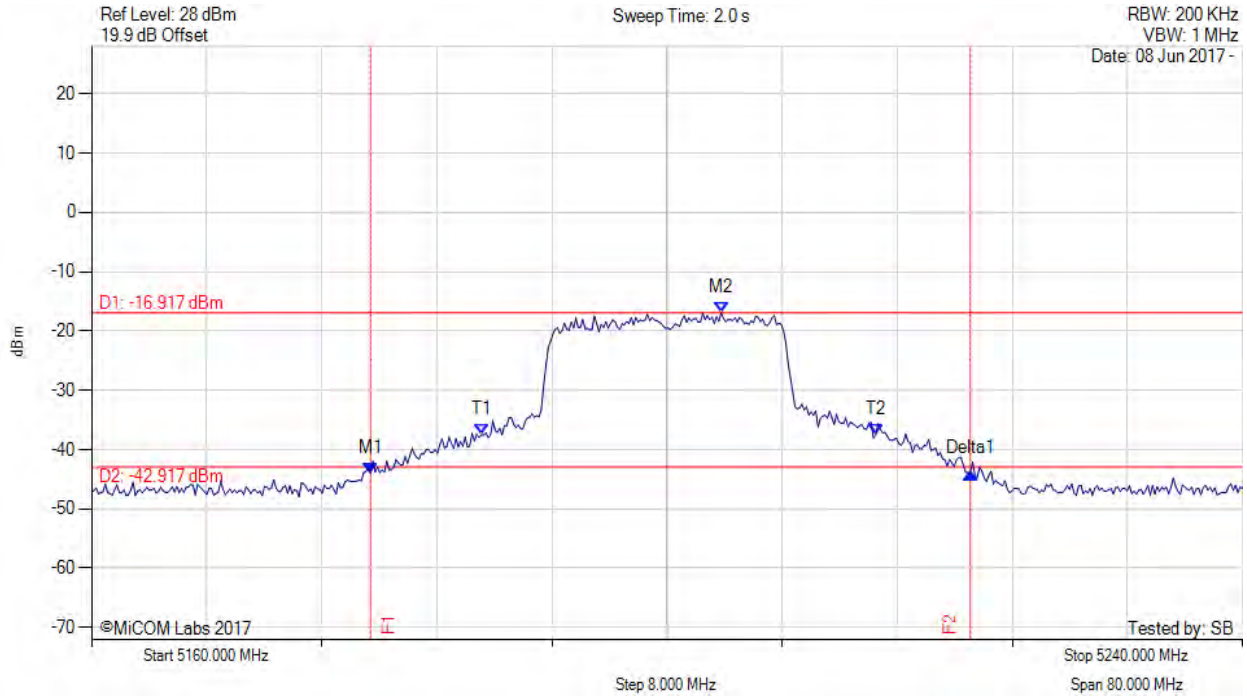

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5179.399 MHz : -44.019 dBm M2 : 5203.768 MHz : -16.917 dBm Delta1 : 41.683 MHz : 0.108 dB T1 : 5187.094 MHz : -37.539 dBm T2 : 5214.509 MHz : -37.515 dBm OBW : 27.415 MHz	Measured 26 dB Bandwidth: 41.683 MHz Measured 99% Bandwidth: 27.415 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5240.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

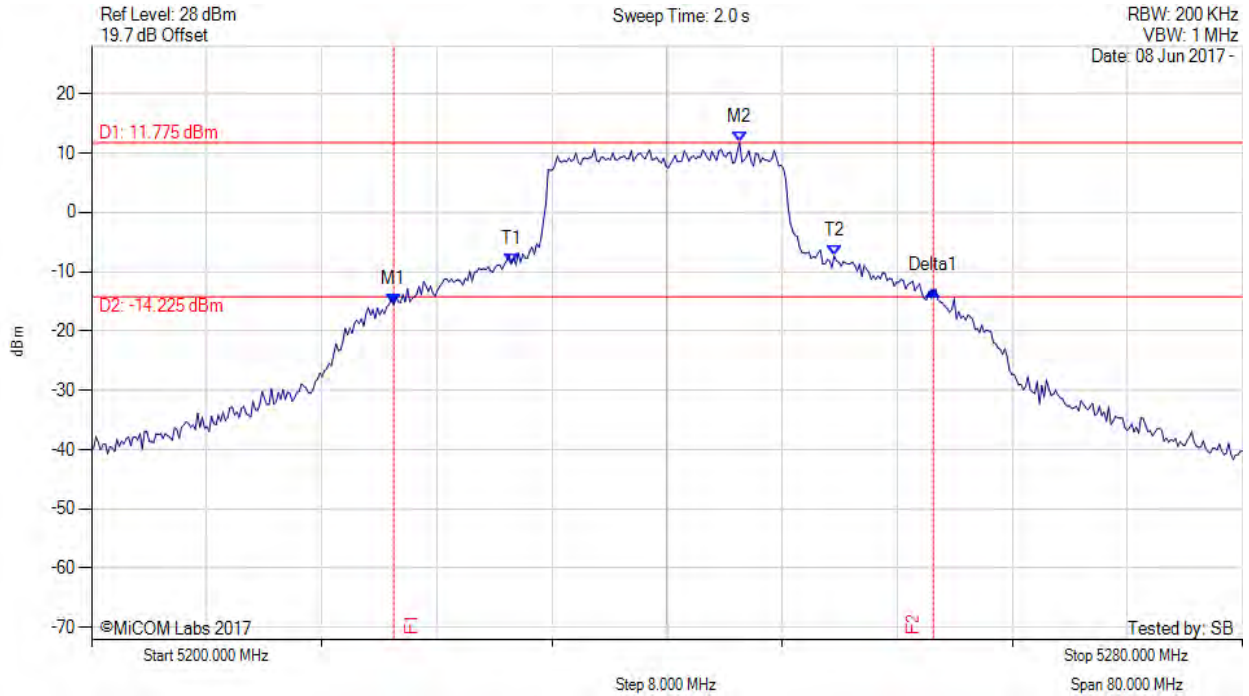

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5221.002 MHz : -15.595 dBm M2 : 5245.050 MHz : 11.775 dBm Delta1 : 37.515 MHz : 2.392 dB T1 : 5229.178 MHz : -8.750 dBm T2 : 5251.623 MHz : -7.351 dBm OBW : 22.445 MHz	Measured 26 dB Bandwidth: 37.515 MHz Measured 99% Bandwidth: 22.445 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variat: 802.11a, Channel: 5240.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

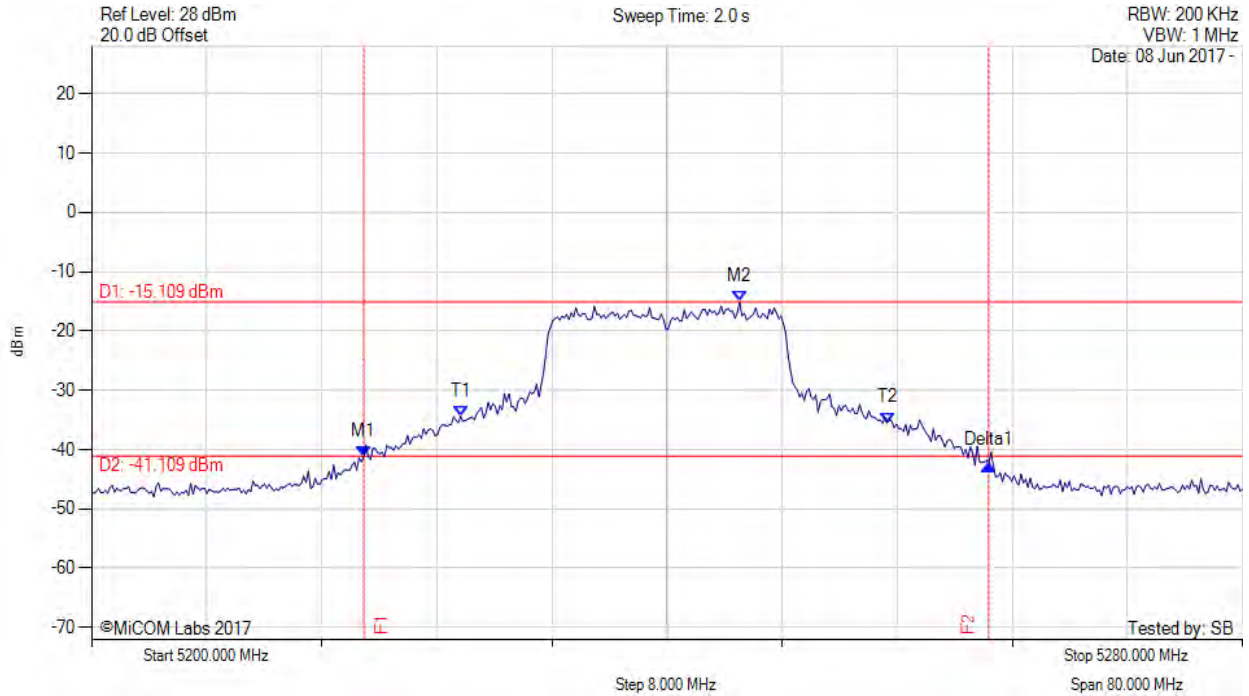

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5218.918 MHz : -41.151 dBm M2 : 5245.050 MHz : -15.109 dBm Delta1 : 43.447 MHz : -1.401 dB T1 : 5225.651 MHz : -34.395 dBm T2 : 5255.311 MHz : -35.473 dBm OBW : 29.659 MHz	Measured 26 dB Bandwidth: 43.447 MHz Measured 99% Bandwidth: 29.659 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





26 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

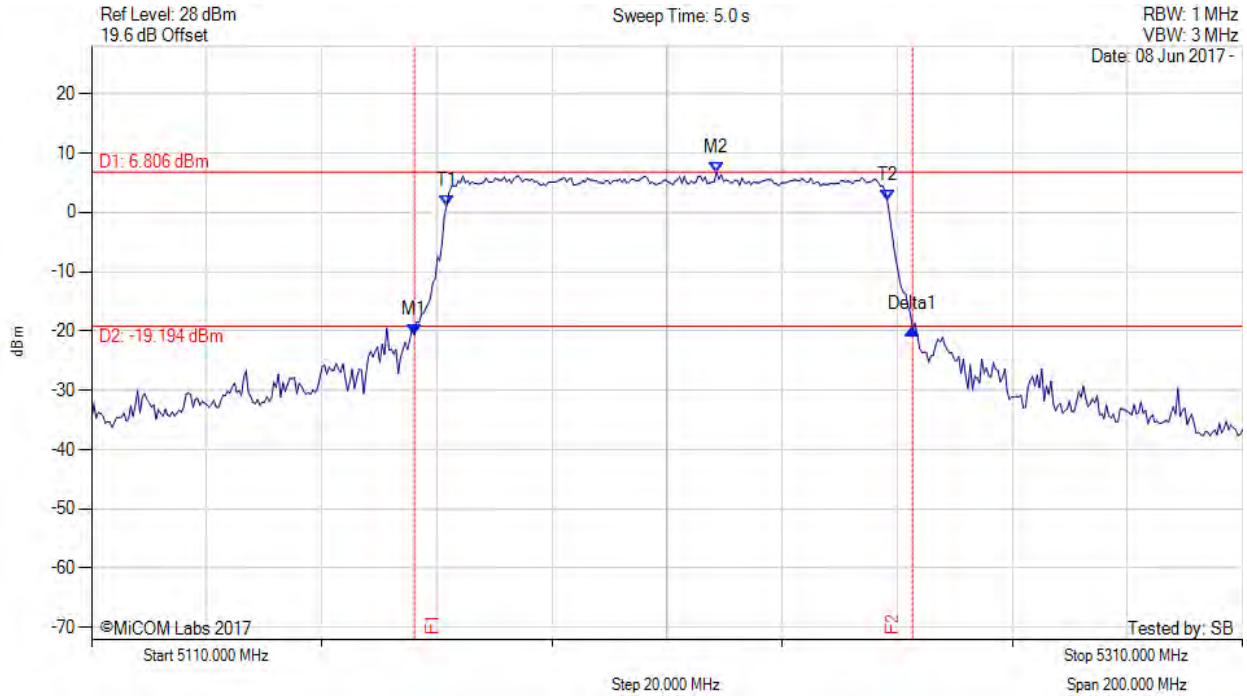

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5166.112 MHz : -20.635 dBm M2 : 5218.617 MHz : 6.806 dBm Delta1 : 86.573 MHz : 0.889 dB T1 : 5171.723 MHz : 1.108 dBm T2 : 5248.277 MHz : 2.068 dBm OBW : 76.553 MHz	Measured 26 dB Bandwidth: 86.573 MHz Measured 99% Bandwidth: 76.553 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





26 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

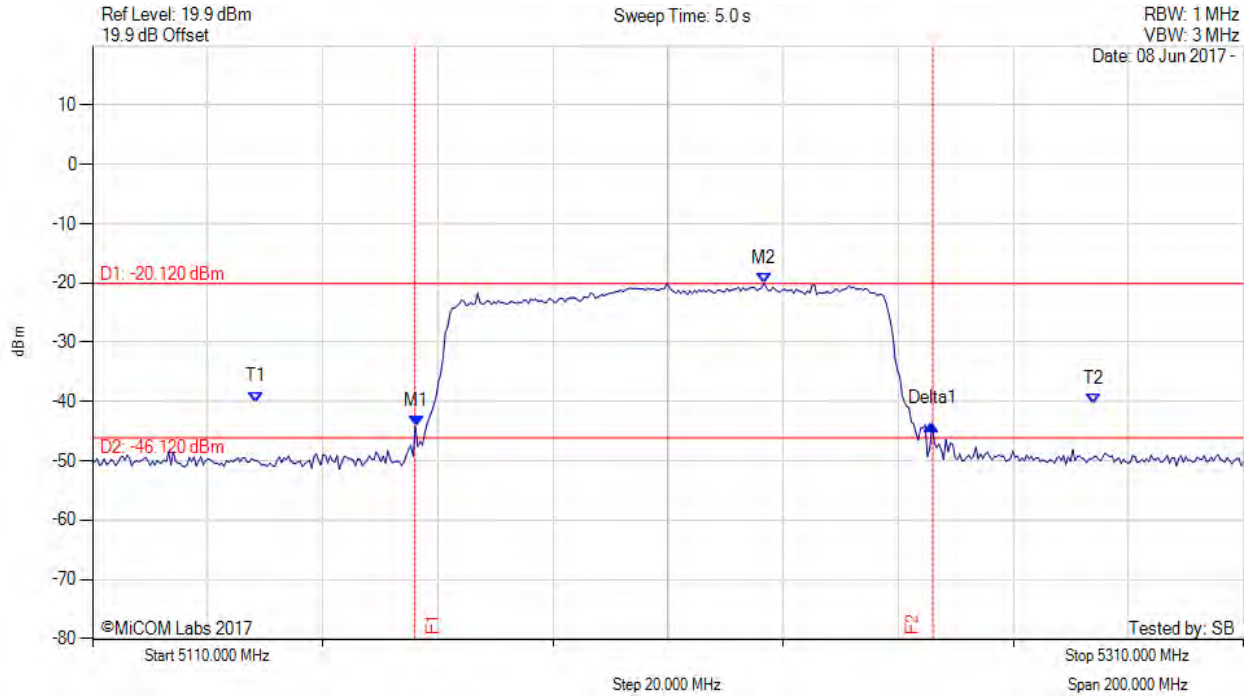

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = MAX HOLD	M1 : 5166.313 MHz : -44.246 dBm M2 : 5226.633 MHz : -20.120 dBm Delta1 : 89.579 MHz : 0.421 dB T1 : 5138.457 MHz : -40.067 dBm T2 : 5283.948 MHz : -40.352 dBm OBW : 76.553 MHz	Measured 26 dB Bandwidth: 89.579 MHz Measured 99% Bandwidth: 76.553 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

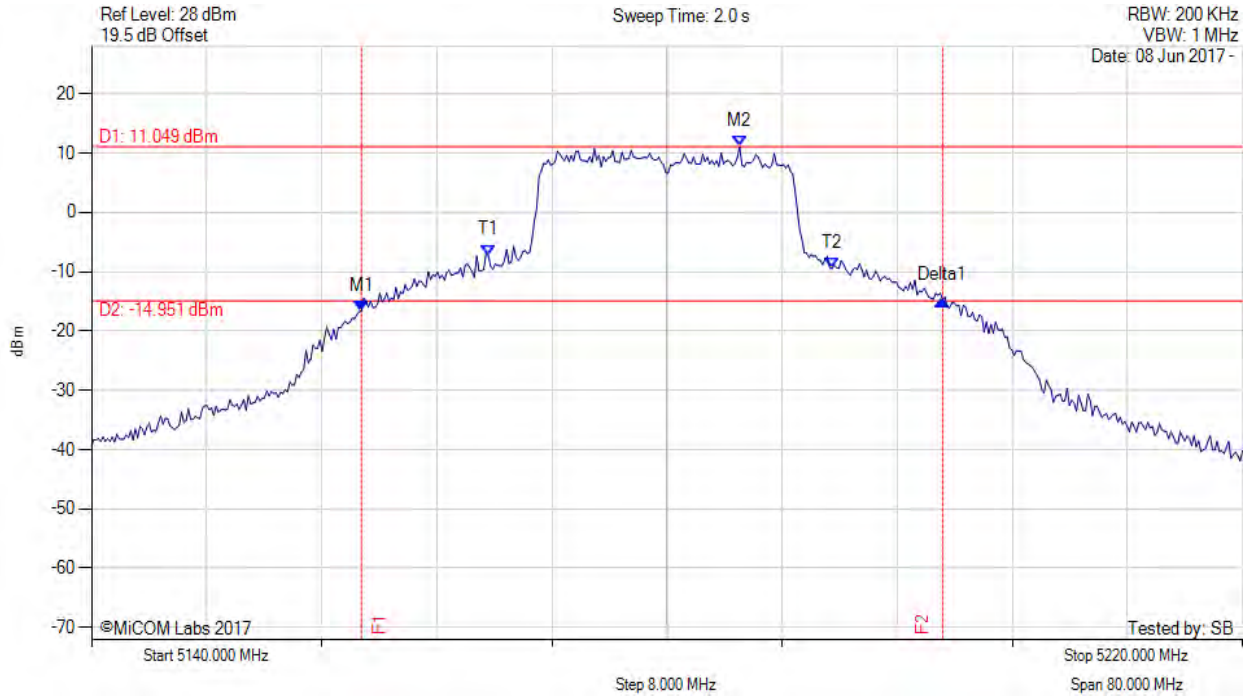

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5158.758 MHz : -16.635 dBm M2 : 5185.050 MHz : 11.049 dBm Delta1 : 40.401 MHz : 1.893 dB T1 : 5167.575 MHz : -7.212 dBm T2 : 5191.463 MHz : -9.496 dBm OBW : 23.888 MHz	Measured 26 dB Bandwidth: 40.401 MHz Measured 99% Bandwidth: 23.888 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

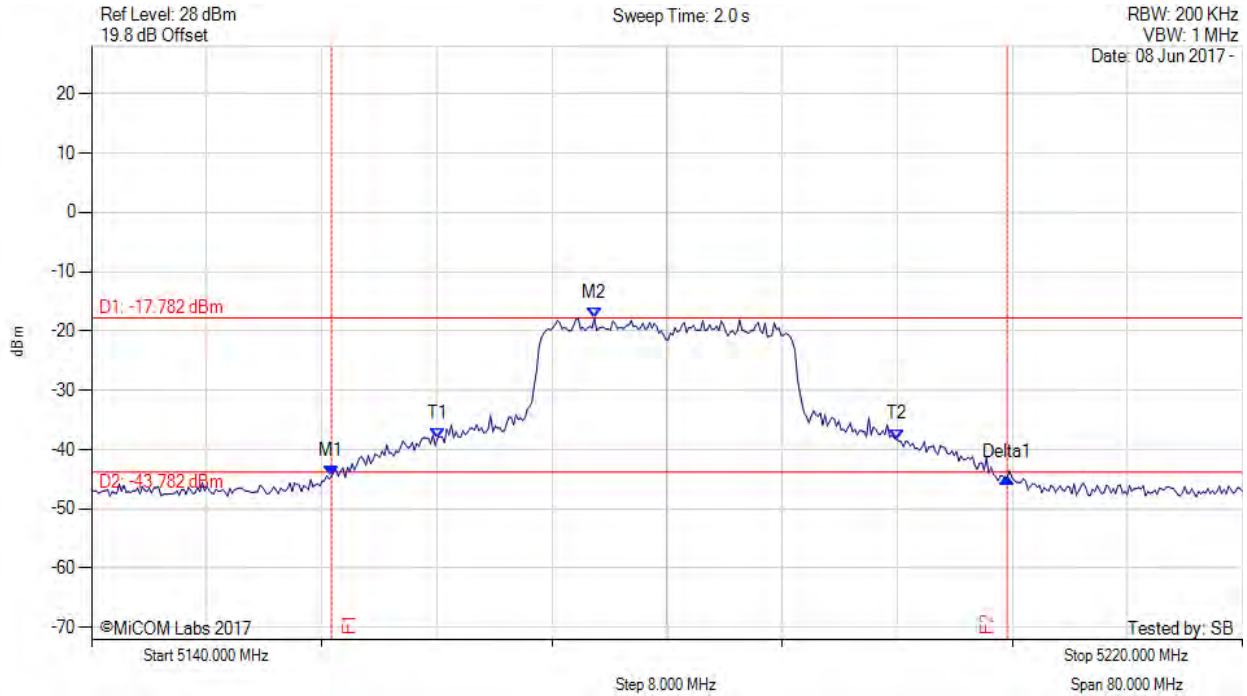

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5156.673 MHz : -44.493 dBm M2 : 5174.950 MHz : -17.782 dBm Delta1 : 46.974 MHz : -0.179 dB T1 : 5164.048 MHz : -38.085 dBm T2 : 5195.952 MHz : -38.296 dBm OBW : 31.904 MHz	Measured 26 dB Bandwidth: 46.974 MHz Measured 99% Bandwidth: 31.904 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

26 dB & 99% BANDWIDTH



Variants: 802.11n HT-20, Channel: 5200.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

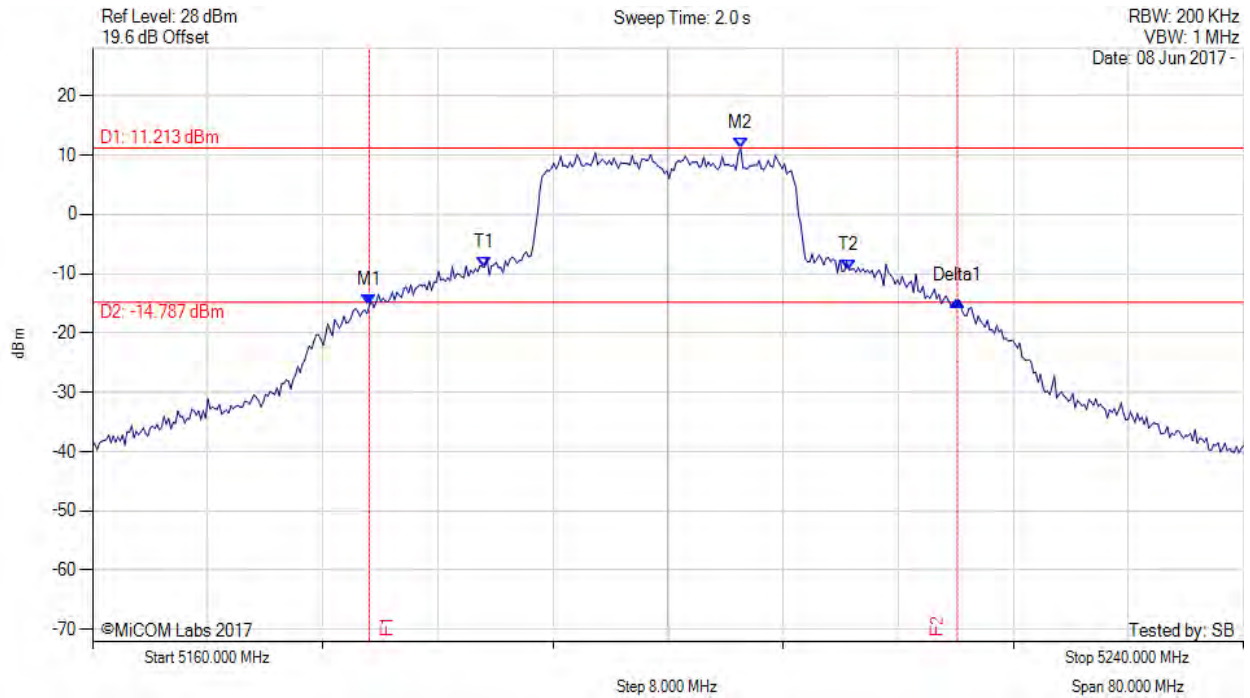

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5179.238 MHz : -15.361 dBm M2 : 5205.050 MHz : 11.213 dBm Delta1 : 40.882 MHz : 0.698 dB T1 : 5187.255 MHz : -8.876 dBm T2 : 5212.585 MHz : -9.370 dBm OBW : 25.331 MHz	Measured 26 dB Bandwidth: 40.882 MHz Measured 99% Bandwidth: 25.331 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 45 of 159



26 dB & 99% BANDWIDTH

Variante: 802.11n HT-20, Channel: 5200.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

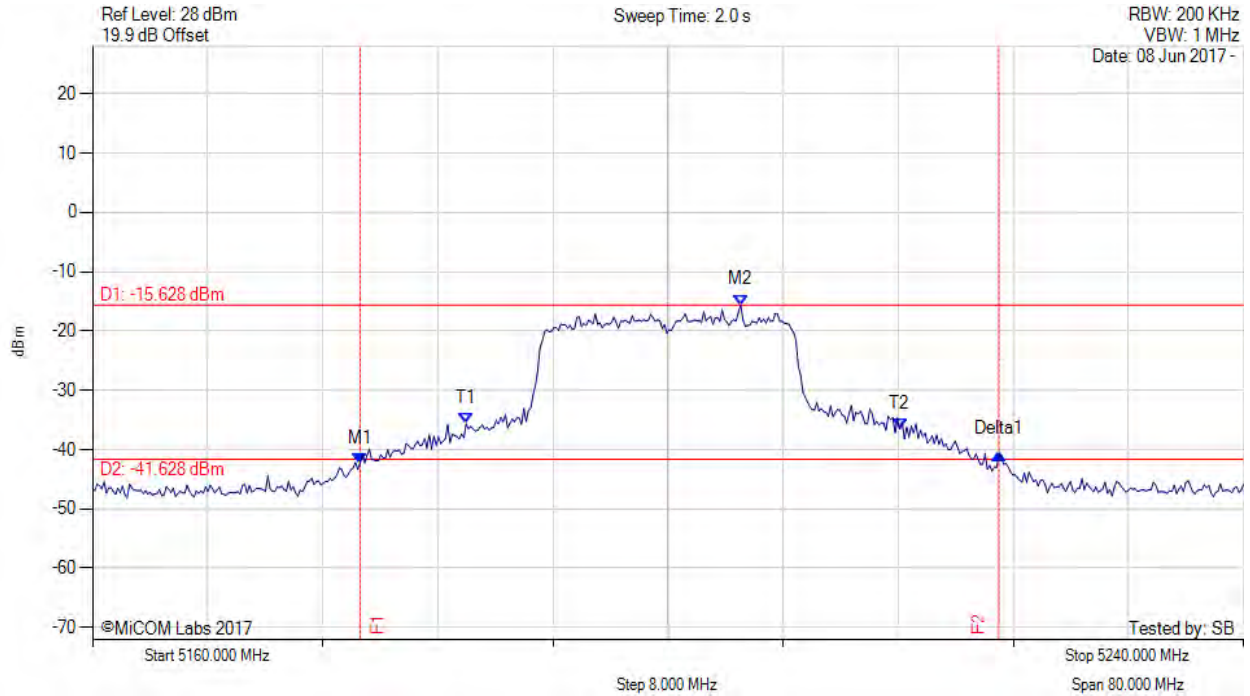

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5178.597 MHz : -42.284 dBm M2 : 5205.050 MHz : -15.628 dBm Delta1 : 44.409 MHz : 1.444 dB T1 : 5185.972 MHz : -35.668 dBm T2 : 5216.112 MHz : -36.527 dBm OBW : 30.140 MHz	Measured 26 dB Bandwidth: 44.409 MHz Measured 99% Bandwidth: 30.140 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

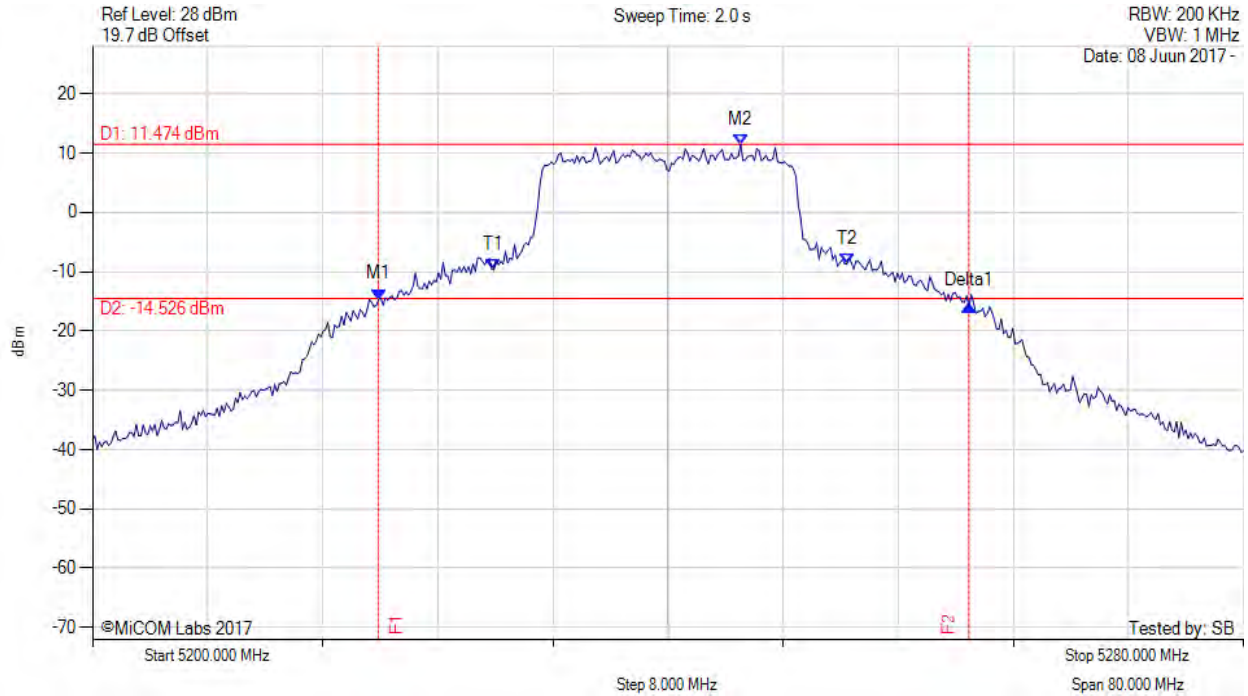

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5219.880 MHz : -14.688 dBm M2 : 5245.050 MHz : 11.474 dBm Delta1 : 41.042 MHz : -1.127 dB T1 : 5227.896 MHz : -9.689 dBm T2 : 5252.425 MHz : -8.715 dBm OBW : 24.529 MHz	Measured 26 dB Bandwidth: 41.042 MHz Measured 99% Bandwidth: 24.529 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





26 dB & 99% BANDWIDTH

Variante: 802.11n HT-20, Channel: 5240.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

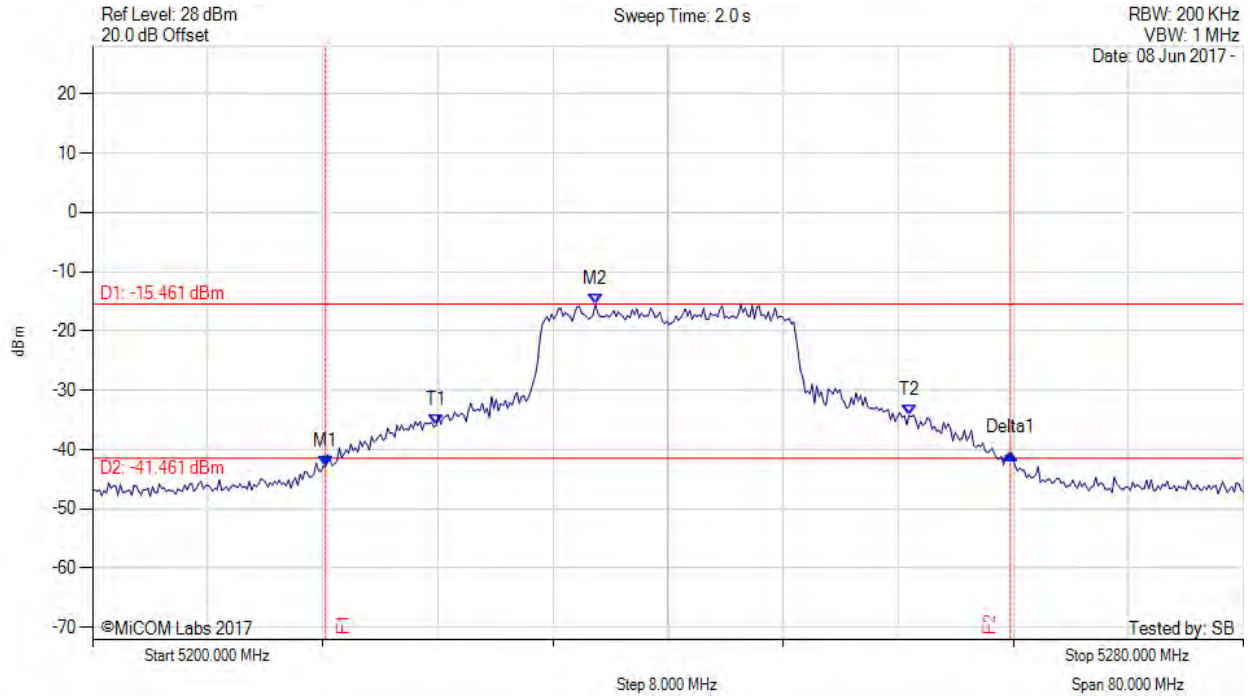

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5216.192 MHz : -42.907 dBm M2 : 5234.950 MHz : -15.461 dBm Delta1 : 47.615 MHz : 2.298 dB T1 : 5223.888 MHz : -35.886 dBm T2 : 5256.754 MHz : -34.253 dBm OBW : 32.866 MHz	Measured 26 dB Bandwidth: 47.615 MHz Measured 99% Bandwidth: 32.866 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 48 of 159

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

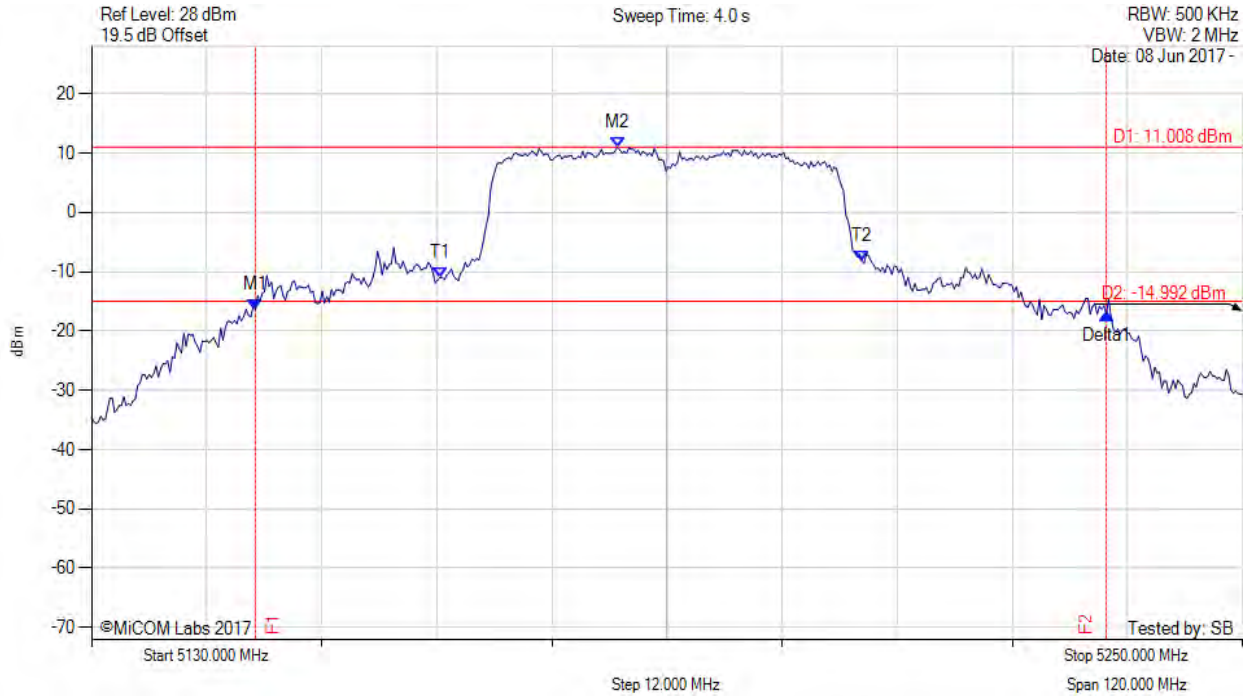

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5147.074 MHz : -16.454 dBm M2 : 5184.830 MHz : 11.008 dBm Delta1 : 88.737 MHz : -0.687 dB T1 : 5166.313 MHz : -11.009 dBm T2 : 5210.321 MHz : -8.184 dBm OBW : 44.008 MHz	Measured 26 dB Bandwidth: 88.737 MHz Measured 99% Bandwidth: 44.008 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 49 of 159

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

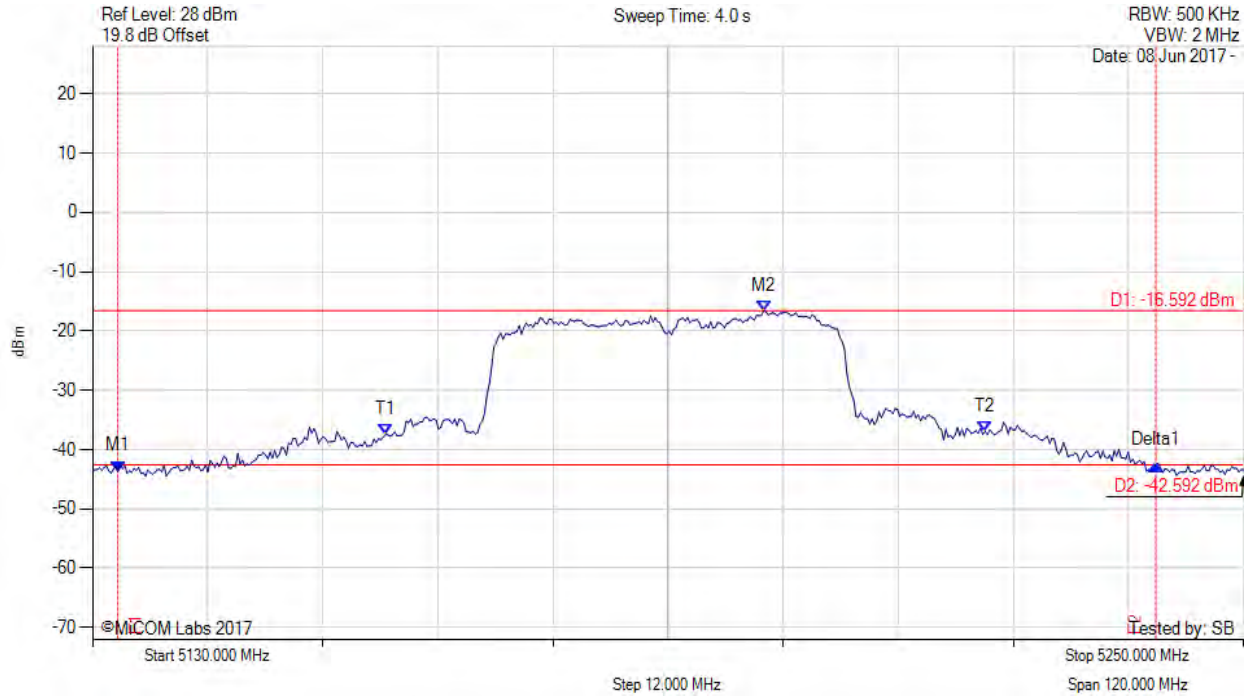

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5132.645 MHz : -43.653 dBm M2 : 5199.980 MHz : -16.592 dBm Delta1 : 108.216 MHz : 1.098 dB T1 : 5160.541 MHz : -37.460 dBm T2 : 5223.066 MHz : -36.954 dBm OBW : 62.525 MHz	Measured 26 dB Bandwidth: 108.216 MHz Measured 99% Bandwidth: 62.525 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 50 of 159

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

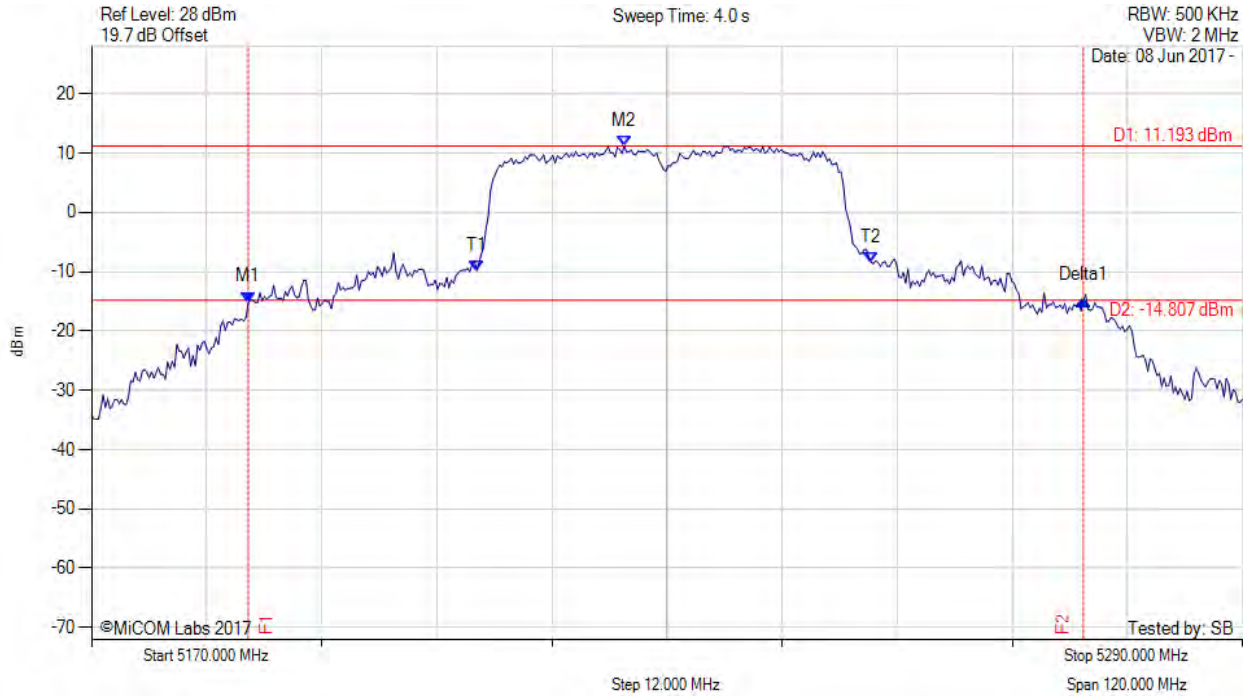

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5186.353 MHz : -15.140 dBm M2 : 5225.551 MHz : 11.193 dBm Delta1 : 87.054 MHz : 0.386 dB T1 : 5210.160 MHz : -9.789 dBm T2 : 5251.283 MHz : -8.410 dBm OBW : 41.122 MHz	Measured 26 dB Bandwidth: 87.054 MHz Measured 99% Bandwidth: 41.122 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 51 of 159

26 dB & 99% BANDWIDTH



Variante: 802.11n HT-40, Channel: 5230.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

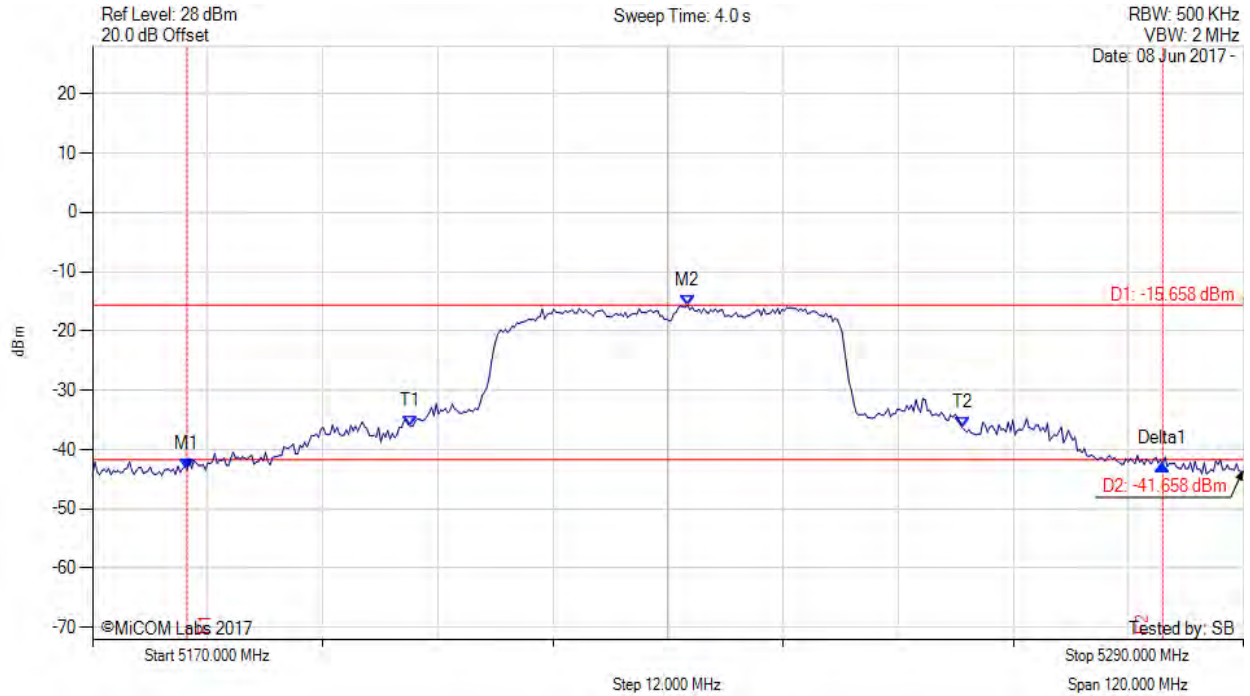


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5179.860 MHz : -43.399 dBm M2 : 5232.044 MHz : -15.658 dBm Delta1 : 101.723 MHz : 0.915 dB T1 : 5203.186 MHz : -36.079 dBm T2 : 5260.661 MHz : -36.277 dBm OBW : 57.475 MHz	Measured 26 dB Bandwidth: 101.723 MHz Measured 99% Bandwidth: 57.475 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## A.2. 6 dB & 99% Bandwidth

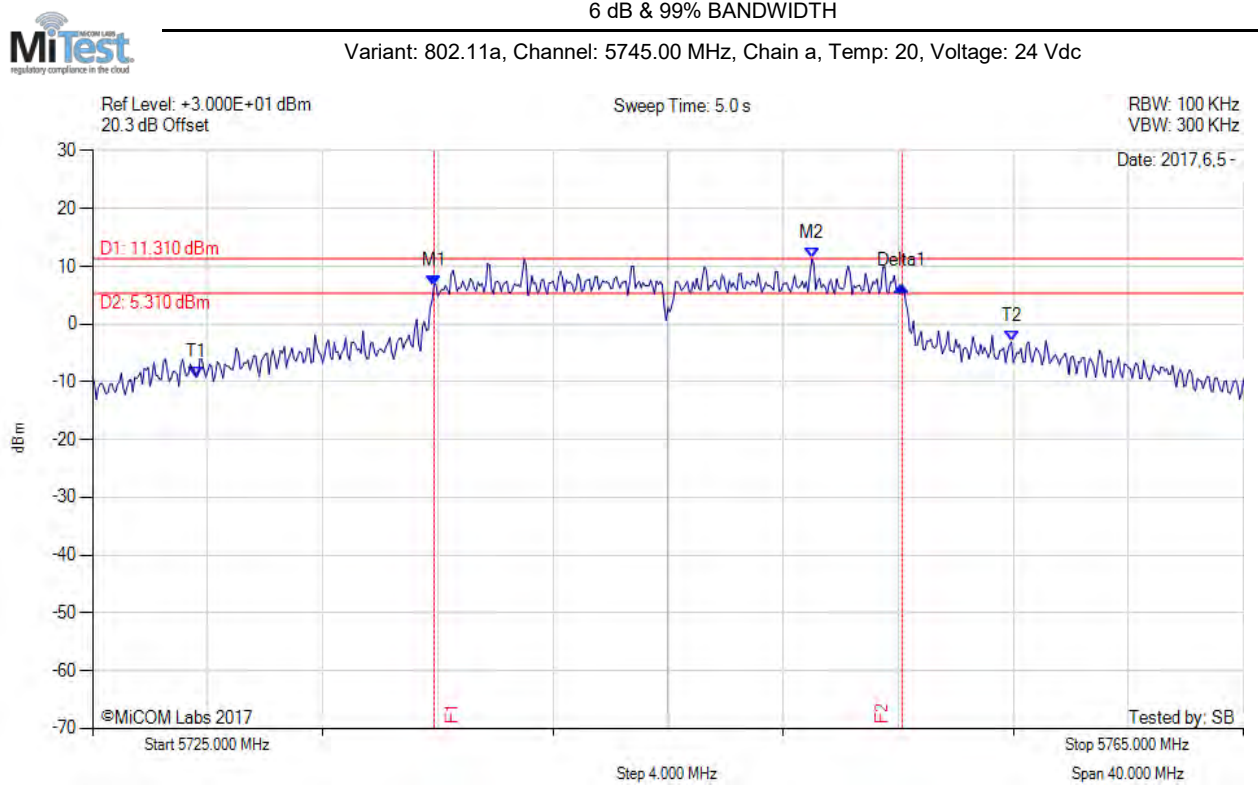

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5736.870 MHz : 6.684 dBm M2 : 5750.000 MHz : 11.310 dBm Delta1 : 16.270 MHz : -0.068 dB T1 : 5728.600 MHz : -9.228 dBm T2 : 5756.933 MHz : -3.068 dBm OBW : 32.562 MHz	Measured 6 dB Bandwidth: 16.270 MHz Measured 99% Bandwidth: 32.562 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variat: 802.11a, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

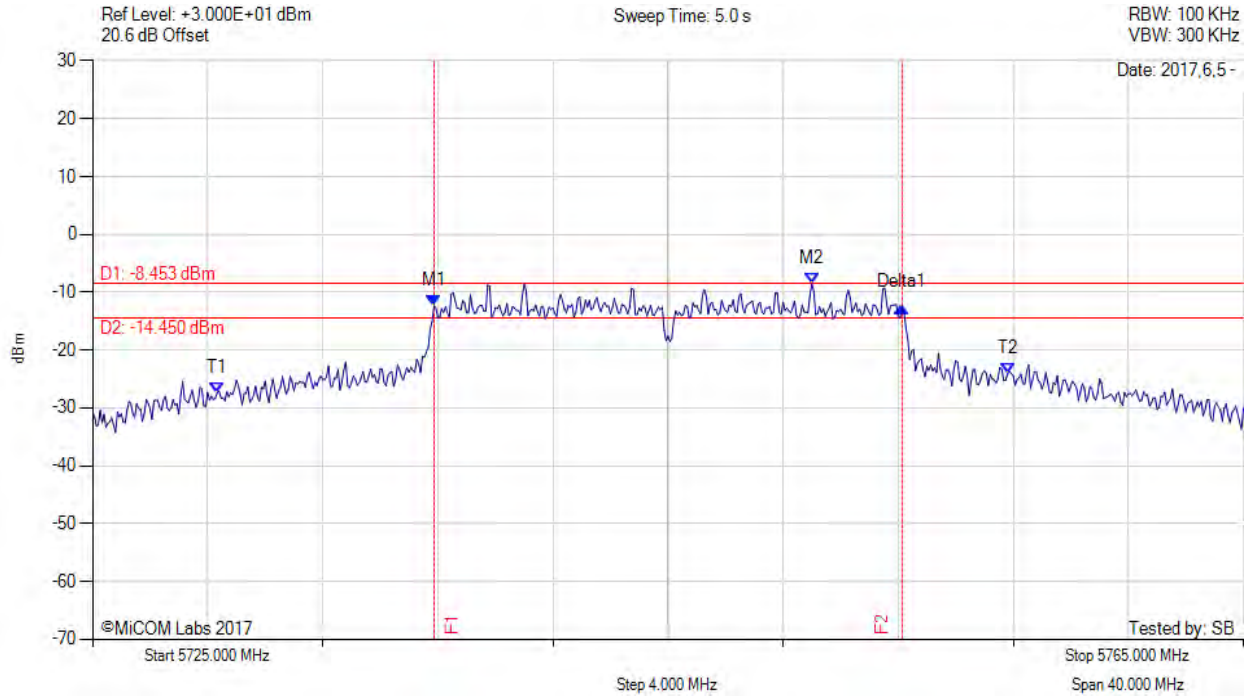

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5736.870 MHz : -12.367 dBm M2 : 5750.000 MHz : -8.453 dBm Delta1 : 16.270 MHz : -0.294 dB T1 : 5729.333 MHz : -27.326 dBm T2 : 5756.800 MHz : -24.081 dBm OBW : 31.545 MHz	Measured 6 dB Bandwidth: 16.270 MHz Measured 99% Bandwidth: 31.545 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variat: 802.11a, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

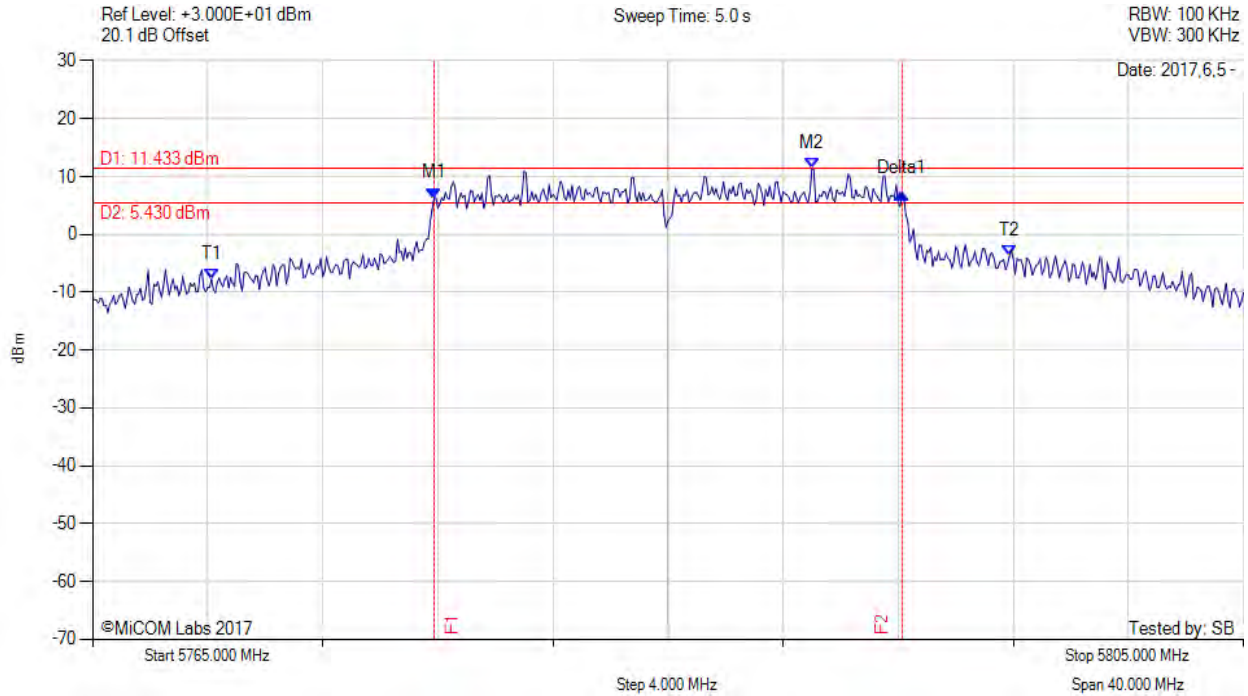

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5776.870 MHz : 6.257 dBm M2 : 5790.000 MHz : 11.433 dBm Delta1 : 16.270 MHz : 0.759 dB T1 : 5769.133 MHz : -7.753 dBm T2 : 5796.867 MHz : -3.791 dBm OBW : 32.157 MHz	Measured 6 dB Bandwidth: 16.270 MHz Measured 99% Bandwidth: 32.157 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





6 dB & 99% BANDWIDTH

Variante: 802.11a, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

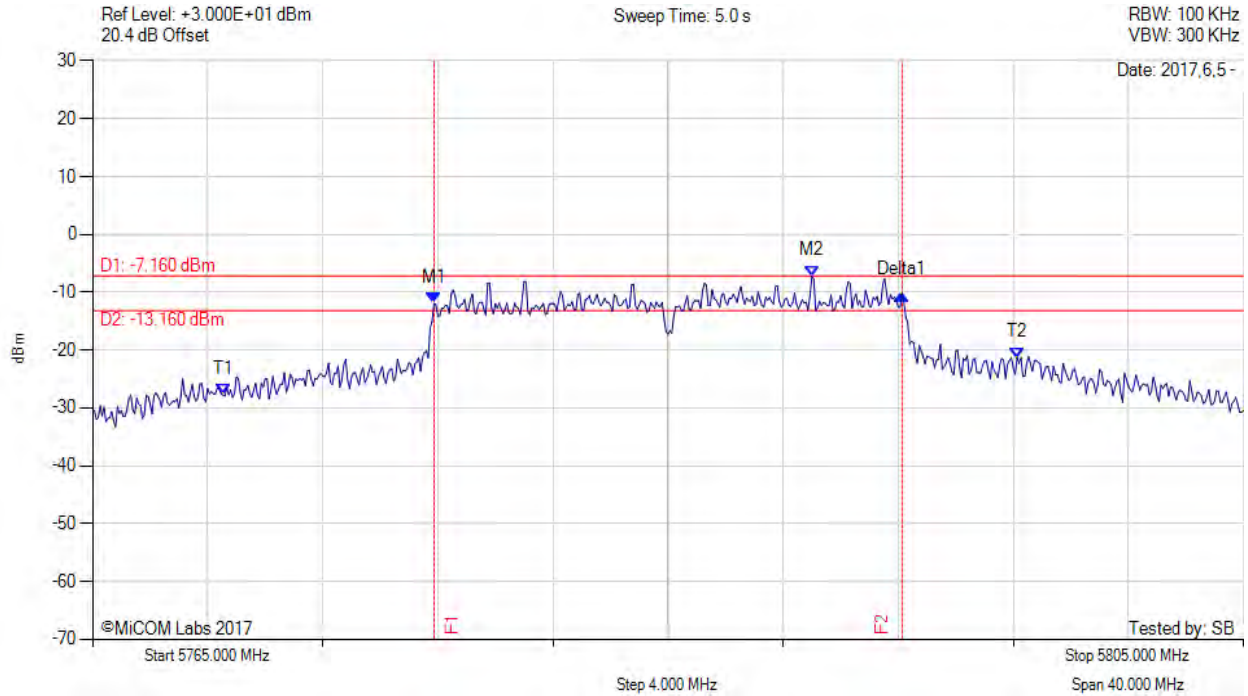

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5776.870 MHz : -11.932 dBm M2 : 5790.000 MHz : -7.160 dBm Delta1 : 16.270 MHz : 1.604 dB T1 : 5769.533 MHz : -27.754 dBm T2 : 5797.133 MHz : -21.302 dBm OBW : 31.880 MHz	Measured 6 dB Bandwidth: 16.270 MHz Measured 99% Bandwidth: 31.880 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 56 of 159



6 dB & 99% BANDWIDTH

Variat: 802.11a, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

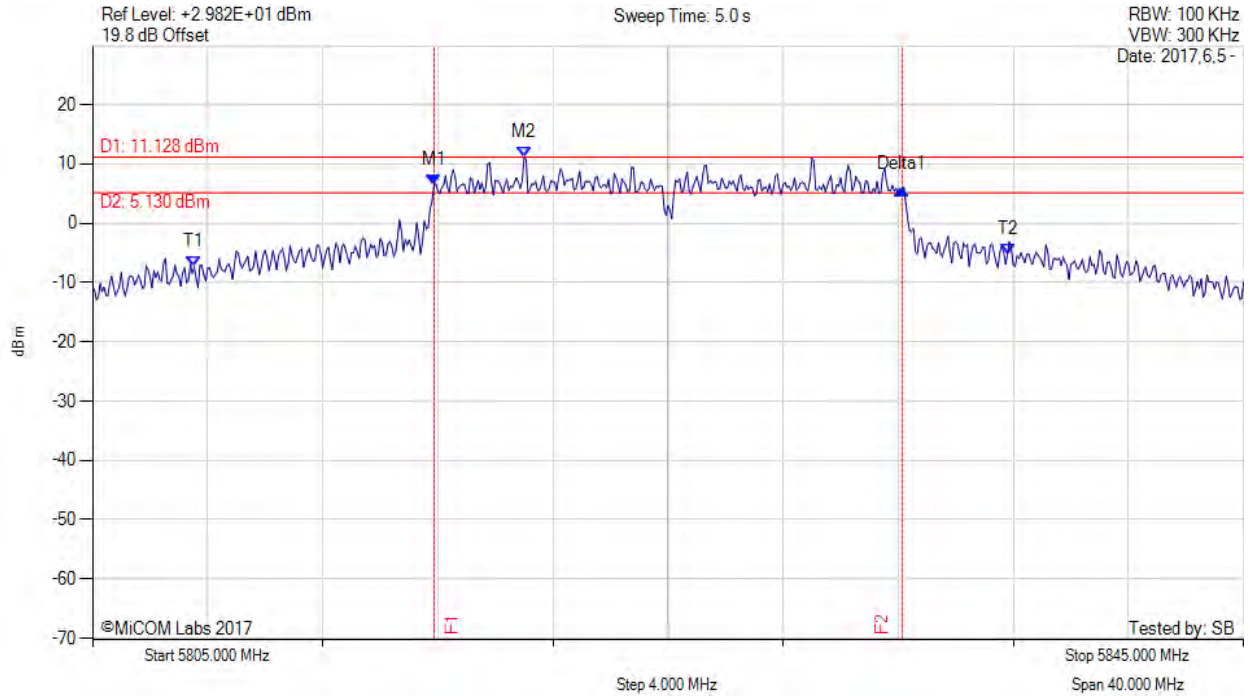

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5816.870 MHz : 6.504 dBm M2 : 5820.000 MHz : 11.128 dBm Delta1 : 16.270 MHz : -0.802 dB T1 : 5808.533 MHz : -7.401 dBm T2 : 5836.800 MHz : -5.174 dBm OBW : 32.588 MHz	Measured 6 dB Bandwidth: 16.270 MHz Measured 99% Bandwidth: 32.588 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 57 of 159



6 dB & 99% BANDWIDTH

Variat: 802.11a, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

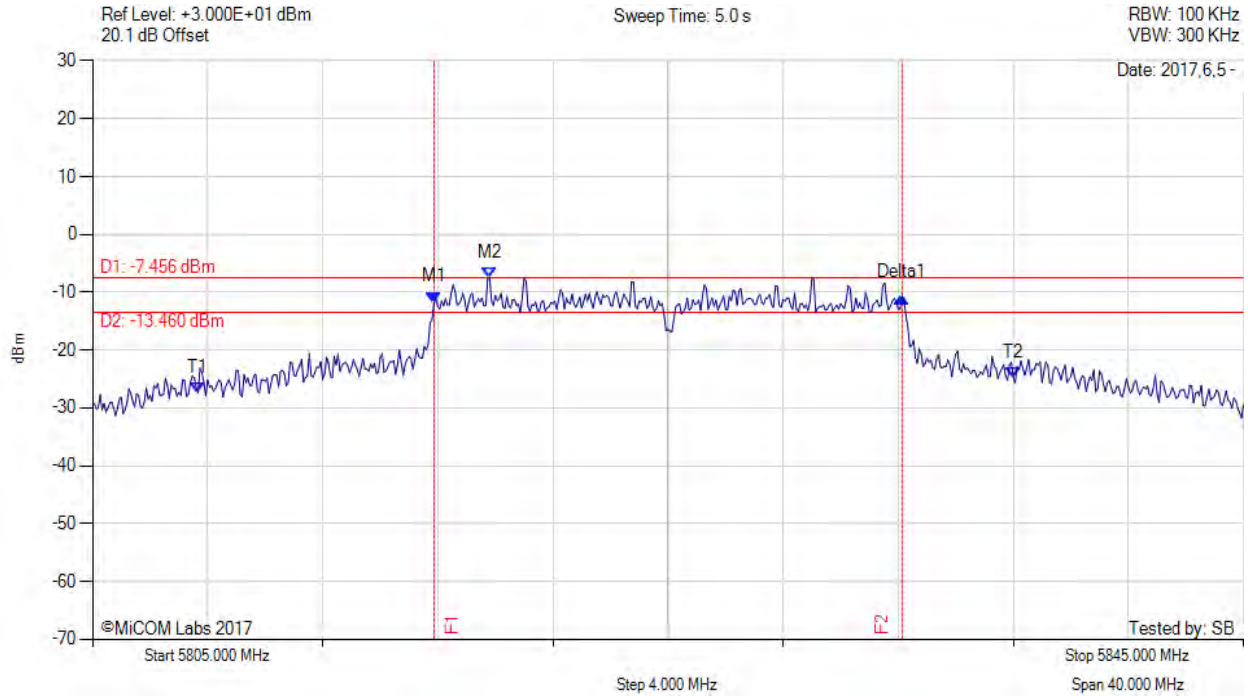

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5816.870 MHz : -11.727 dBm M2 : 5818.800 MHz : -7.456 dBm Delta1 : 16.270 MHz : 0.784 dB T1 : 5808.667 MHz : -27.369 dBm T2 : 5837.000 MHz : -24.792 dBm OBW : 32.625 MHz	Measured 6 dB Bandwidth: 16.270 MHz Measured 99% Bandwidth: 32.625 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 58 of 159



6 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

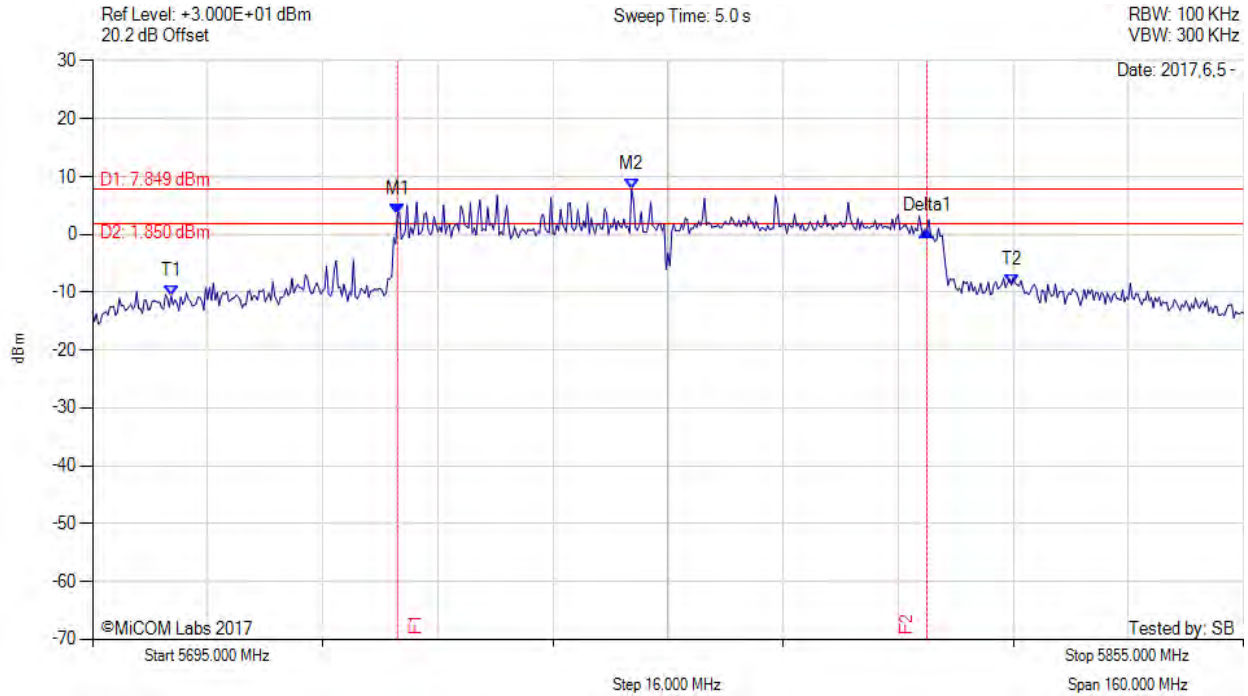

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5737.400 MHz : 3.594 dBm M2 : 5769.930 MHz : 7.849 dBm Delta1 : 73.600 MHz : -3.035 dB T1 : 5705.933 MHz : -10.598 dBm T2 : 5822.733 MHz : -8.757 dBm OBW : 137.504 MHz	Measured 6 dB Bandwidth: 73.600 MHz Measured 99% Bandwidth: 137.504 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 59 of 159



6 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

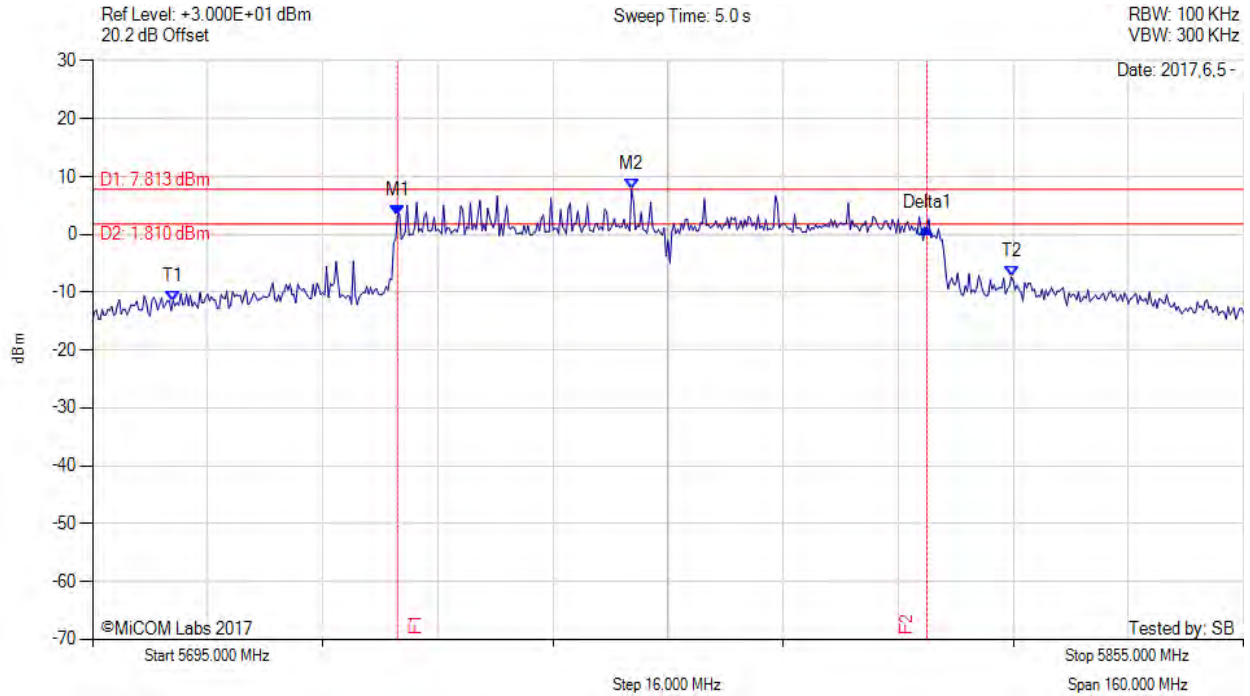

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5737.400 MHz : 3.153 dBm M2 : 5769.930 MHz : 7.813 dBm Delta1 : 73.600 MHz : -2.030 dB T1 : 5706.200 MHz : -11.497 dBm T2 : 5822.733 MHz : -7.329 dBm OBW : 136.952 MHz	Channel Frequency: 5775.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

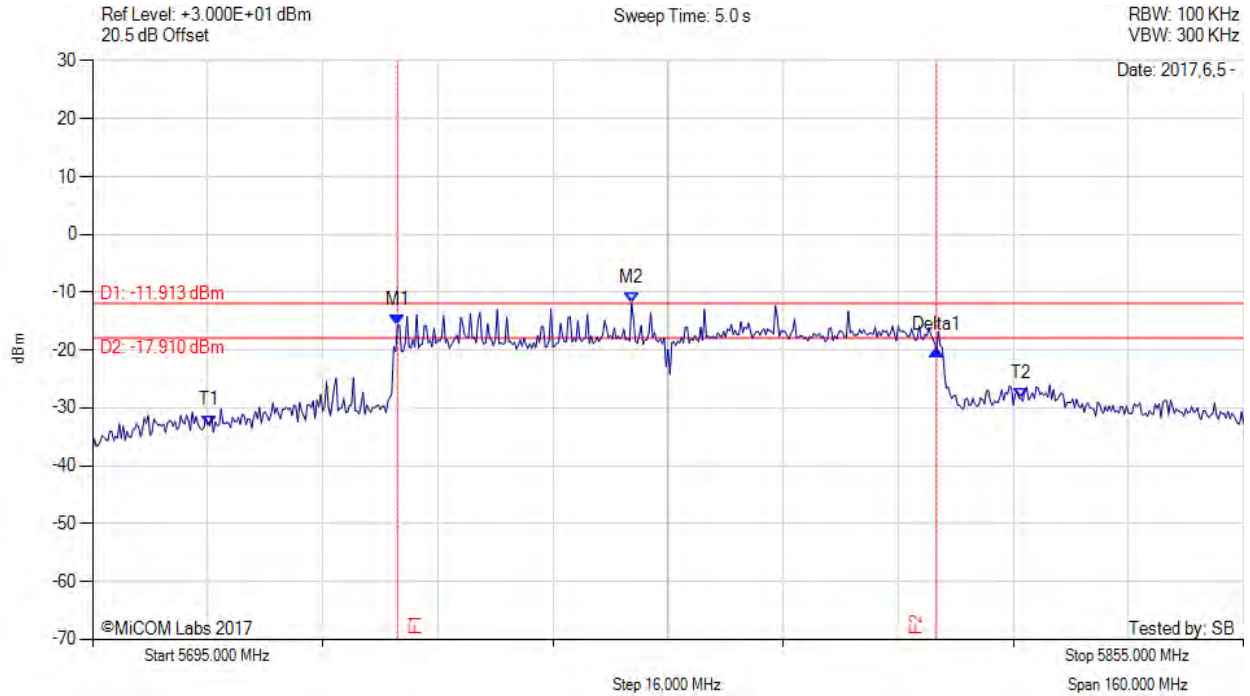

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5737.400 MHz : -15.741 dBm M2 : 5769.930 MHz : -11.913 dBm Delta1 : 74.930 MHz : -4.176 dB T1 : 5711.267 MHz : -33.045 dBm T2 : 5824.067 MHz : -28.389 dBm OBW : 133.645 MHz	Measured 6 dB Bandwidth: 74.930 MHz Measured 99% Bandwidth: 133.645 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 61 of 159

6 dB & 99% BANDWIDTH



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

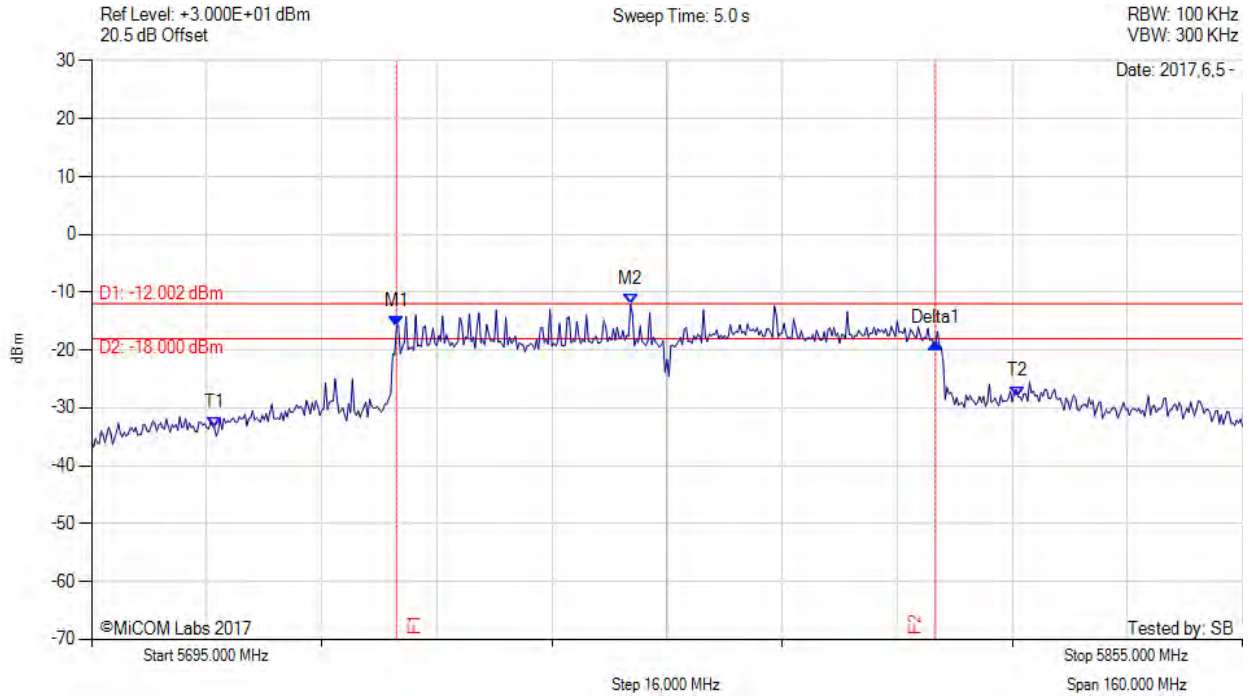

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5737.400 MHz : -15.939 dBm M2 : 5769.930 MHz : -12.002 dBm Delta1 : 74.930 MHz : -2.834 dB T1 : 5712.067 MHz : -33.361 dBm T2 : 5823.800 MHz : -28.019 dBm OBW : 133.198 MHz	Channel Frequency: 5775.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variante: 802.11n HT-20, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

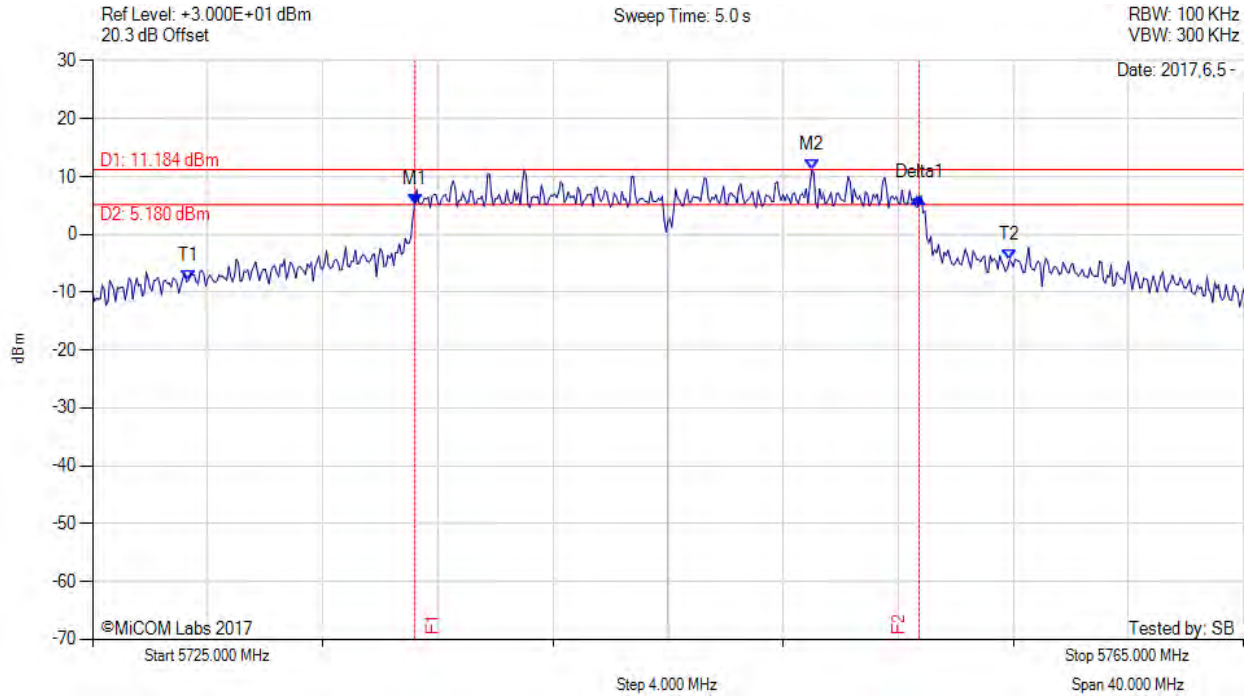

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5736.200 MHz : 5.266 dBm M2 : 5750.000 MHz : 11.184 dBm Delta1 : 17.530 MHz : 1.097 dB T1 : 5728.333 MHz : -7.936 dBm T2 : 5756.867 MHz : -4.415 dBm OBW : 33.076 MHz	Measured 6 dB Bandwidth: 17.530 MHz Measured 99% Bandwidth: 33.076 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

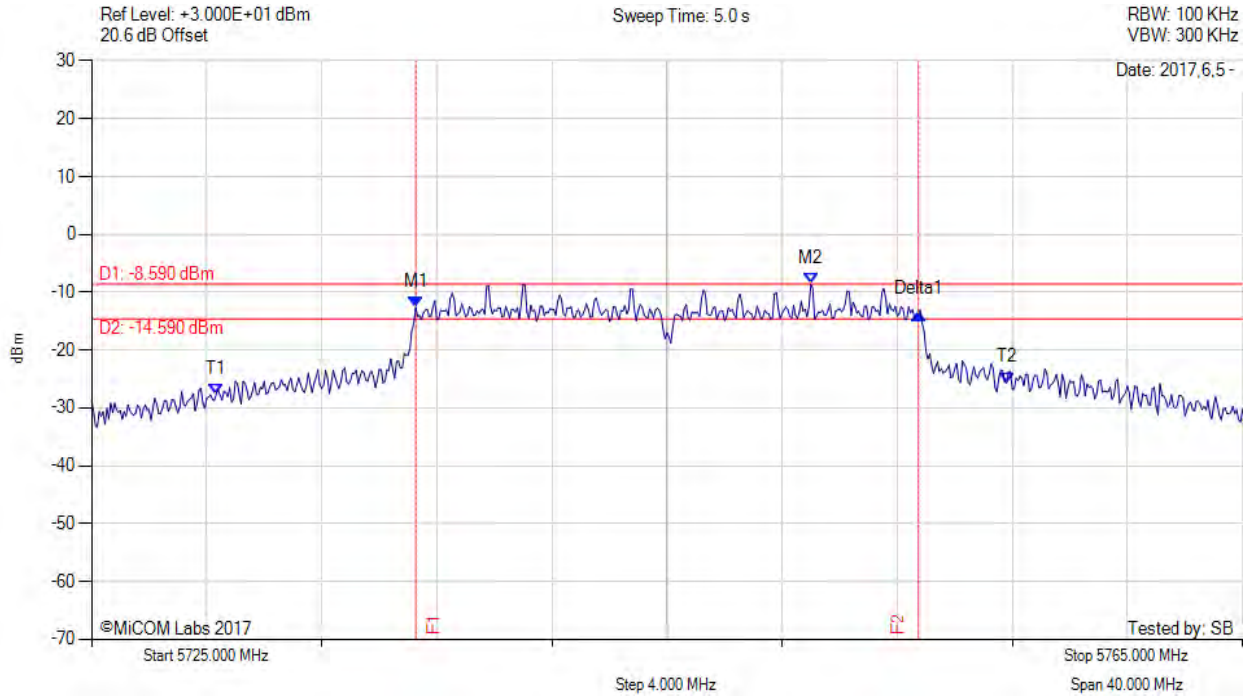

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5736.270 MHz : -12.621 dBm M2 : 5750.000 MHz : -8.590 dBm Delta1 : 17.470 MHz : -1.124 dB T1 : 5729.333 MHz : -27.549 dBm T2 : 5756.800 MHz : -25.629 dBm OBW : 31.711 MHz	Measured 6 dB Bandwidth: 17.470 MHz Measured 99% Bandwidth: 31.711 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

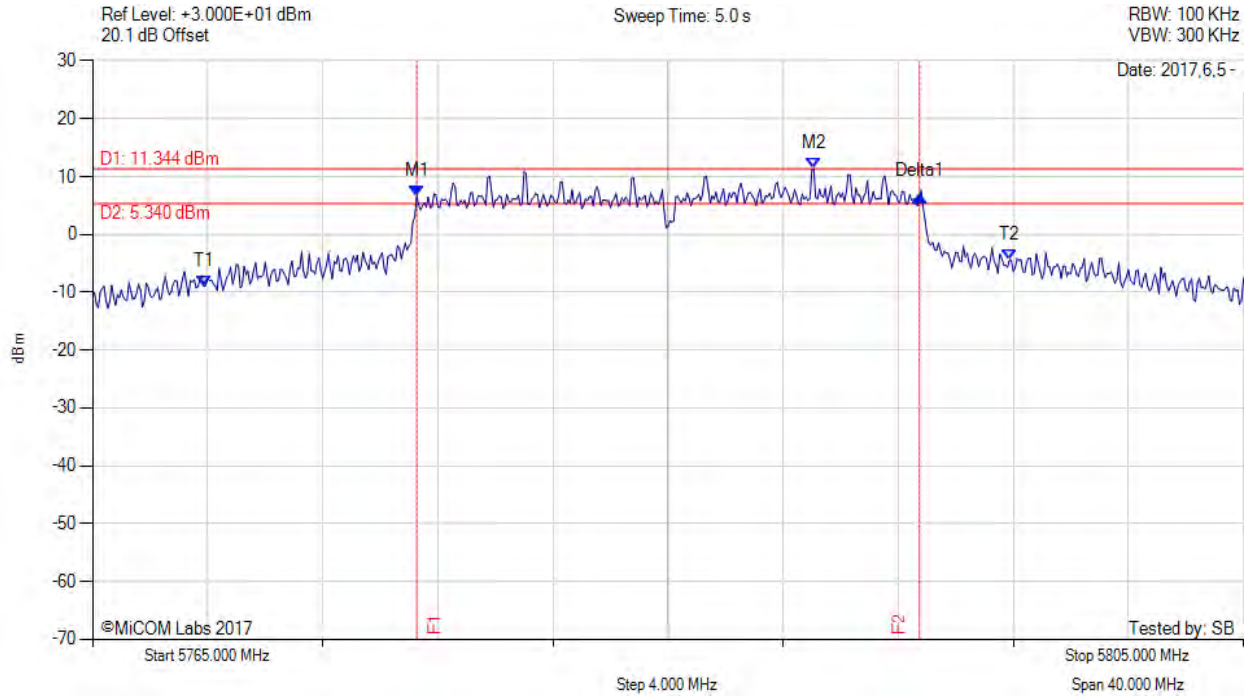

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5776.270 MHz : 6.659 dBm M2 : 5790.070 MHz : 11.344 dBm Delta1 : 17.470 MHz : -0.097 dB T1 : 5768.867 MHz : -8.991 dBm T2 : 5796.867 MHz : -4.486 dBm OBW : 32.721 MHz	Measured 6 dB Bandwidth: 17.470 MHz Measured 99% Bandwidth: 32.721 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 65 of 159

6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

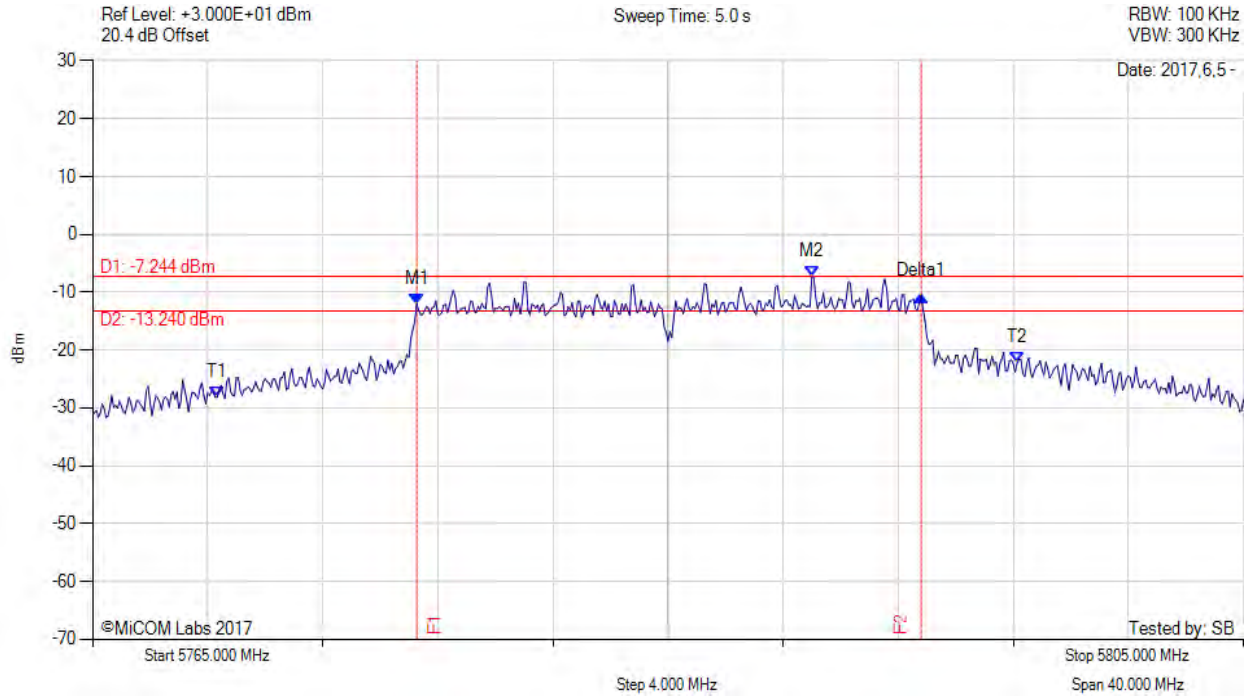

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5776.270 MHz : -12.020 dBm M2 : 5790.000 MHz : -7.244 dBm Delta1 : 17.530 MHz : 1.413 dB T1 : 5769.333 MHz : -28.130 dBm T2 : 5797.133 MHz : -22.203 dBm OBW : 32.397 MHz	Measured 6 dB Bandwidth: 17.530 MHz Measured 99% Bandwidth: 32.397 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 66 of 159

6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

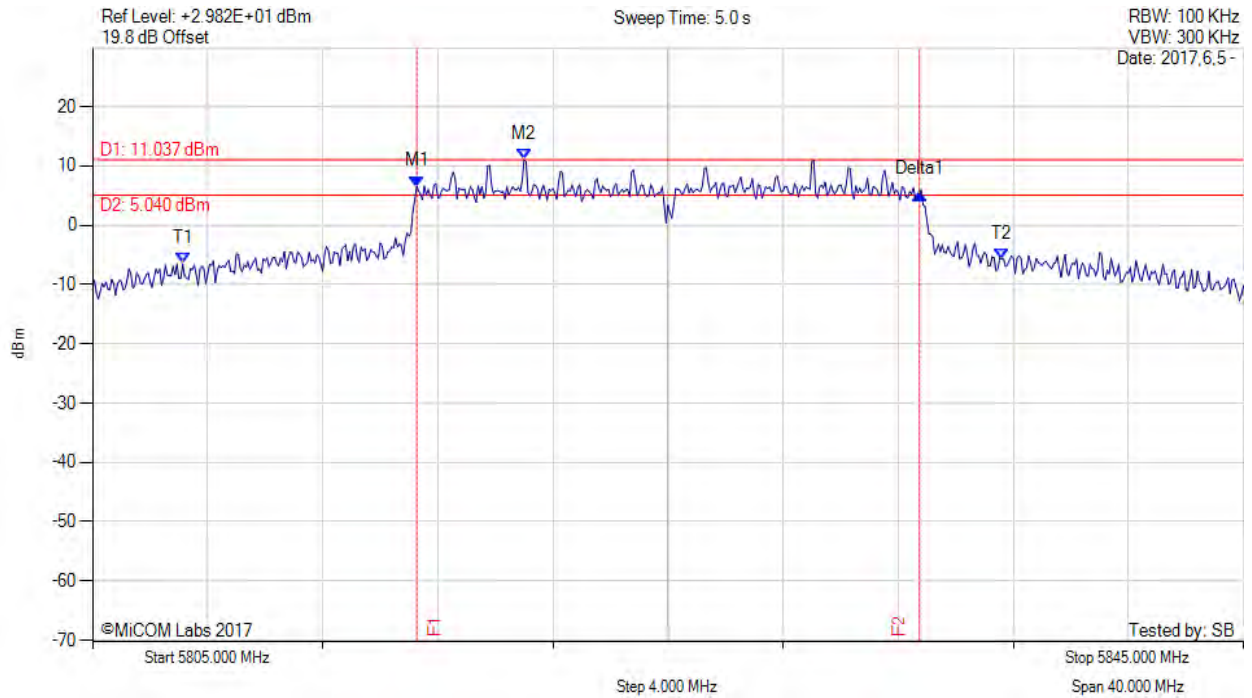

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5816.270 MHz : 6.551 dBm M2 : 5820.000 MHz : 11.037 dBm Delta1 : 17.470 MHz : -1.218 dB T1 : 5808.133 MHz : -6.529 dBm T2 : 5836.600 MHz : -5.700 dBm OBW : 33.339 MHz	Measured 6 dB Bandwidth: 17.470 MHz Measured 99% Bandwidth: 33.339 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 67 of 159



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

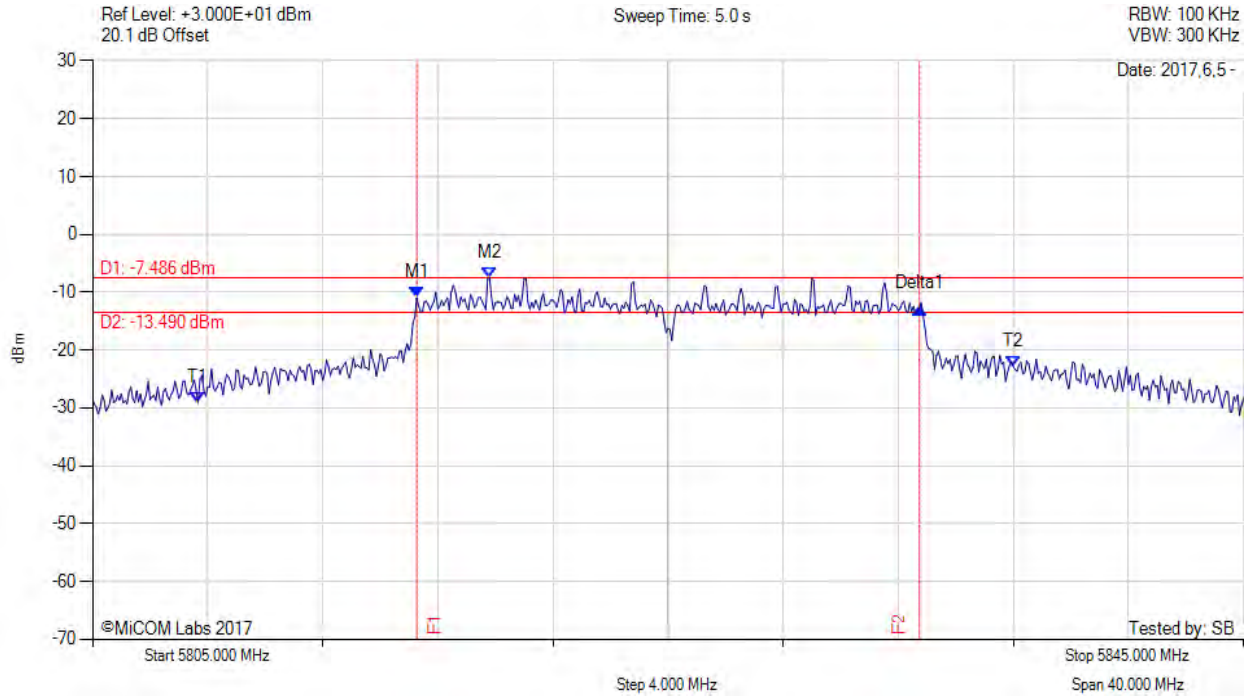

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5816.270 MHz : -10.966 dBm M2 : 5818.800 MHz : -7.486 dBm Delta1 : 17.470 MHz : -1.868 dB T1 : 5808.667 MHz : -29.149 dBm T2 : 5837.000 MHz : -22.853 dBm OBW : 32.912 MHz	Measured 6 dB Bandwidth: 17.470 MHz Measured 99% Bandwidth: 32.912 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 68 of 159



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

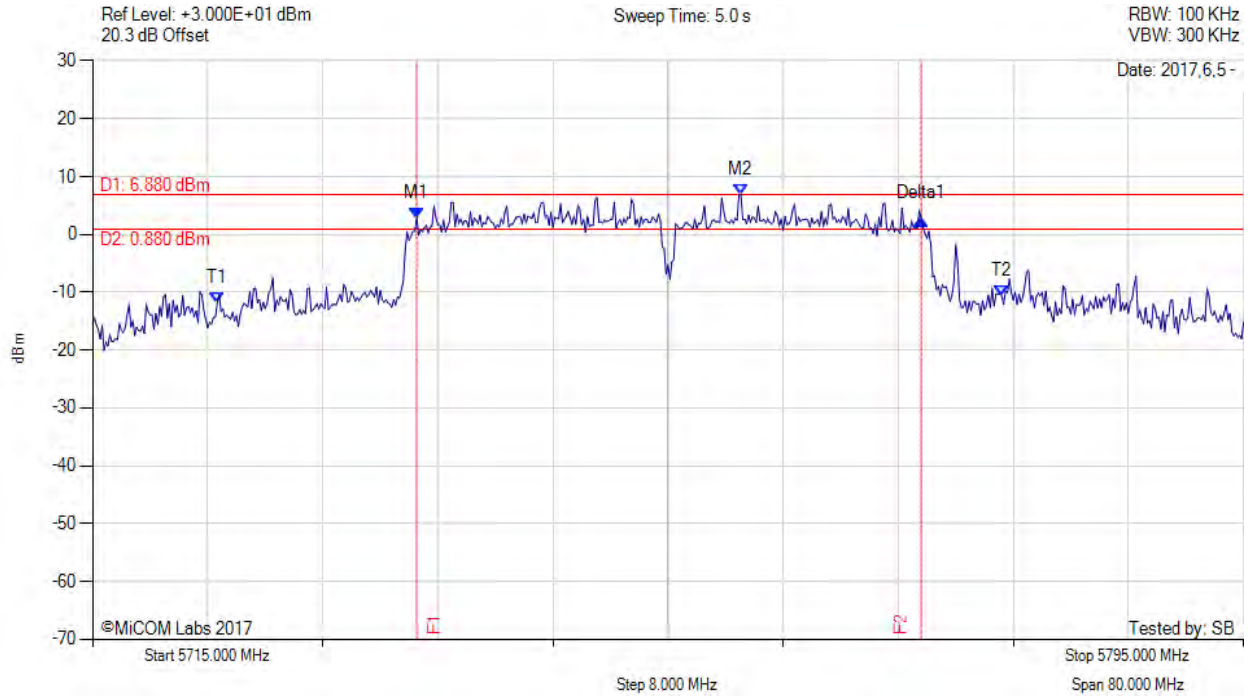

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5737.530 MHz : 2.804 dBm M2 : 5760.070 MHz : 6.880 dBm Delta1 : 35.070 MHz : -0.159 dB T1 : 5723.667 MHz : -11.855 dBm T2 : 5778.200 MHz : -10.653 dBm OBW : 63.479 MHz	Measured 6 dB Bandwidth: 35.070 MHz Measured 99% Bandwidth: 63.479 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 69 of 159



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

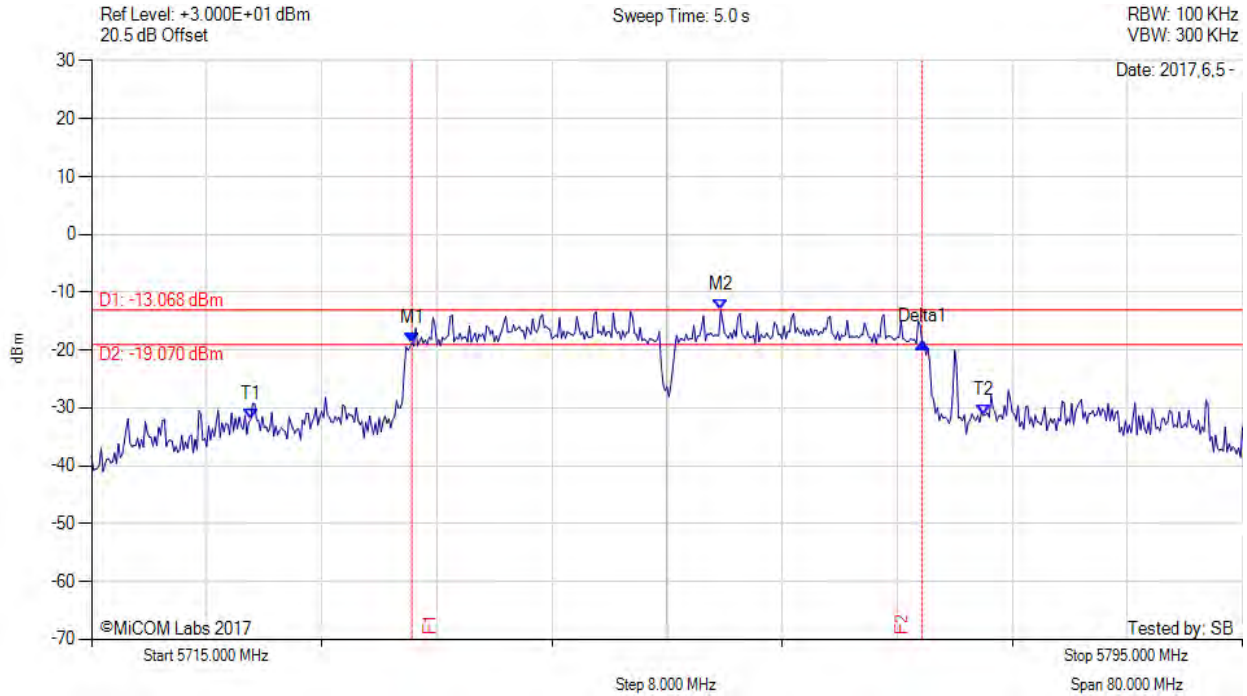

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5737.270 MHz : -18.840 dBm M2 : 5758.730 MHz : -13.068 dBm Delta1 : 35.470 MHz : 0.185 dB T1 : 5726.067 MHz : -32.017 dBm T2 : 5777.000 MHz : -31.293 dBm OBW : 61.202 MHz	Measured 6 dB Bandwidth: 35.470 MHz Measured 99% Bandwidth: 61.202 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 70 of 159



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

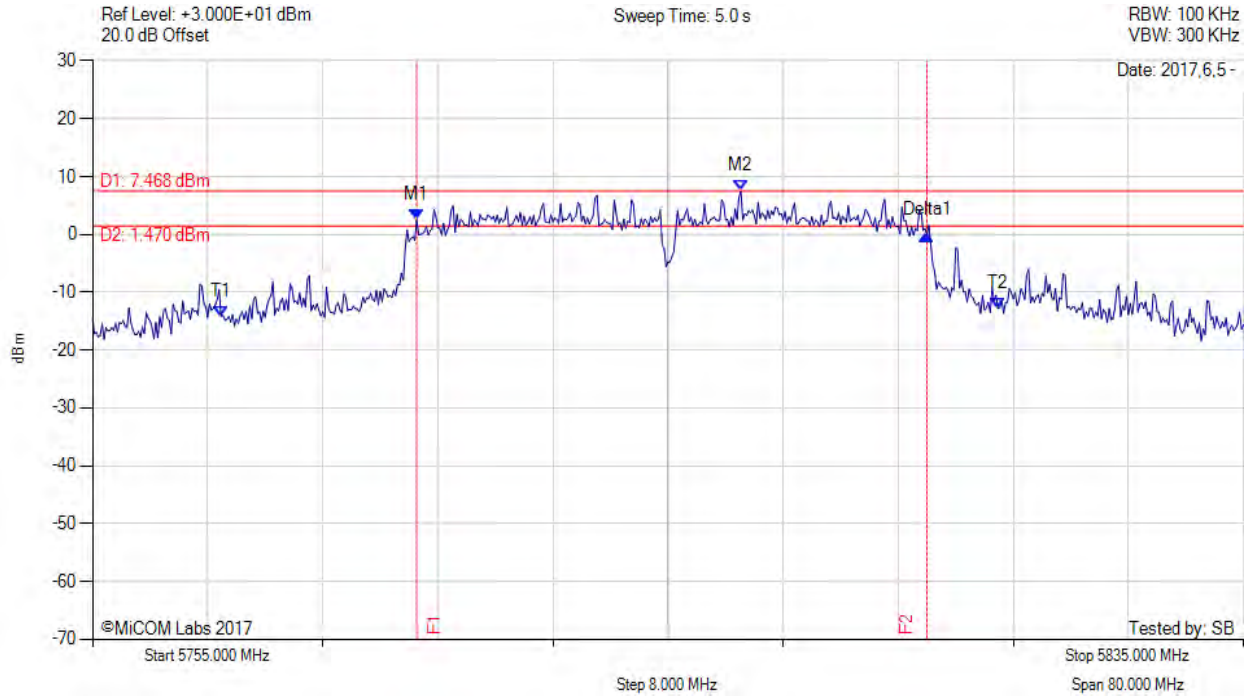

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5777.530 MHz : 2.463 dBm M2 : 5800.070 MHz : 7.468 dBm Delta1 : 35.470 MHz : -2.601 dB T1 : 5763.933 MHz : -14.163 dBm T2 : 5817.933 MHz : -12.787 dBm OBW : 62.305 MHz	Measured 6 dB Bandwidth: 35.470 MHz Measured 99% Bandwidth: 62.305 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 71 of 159



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

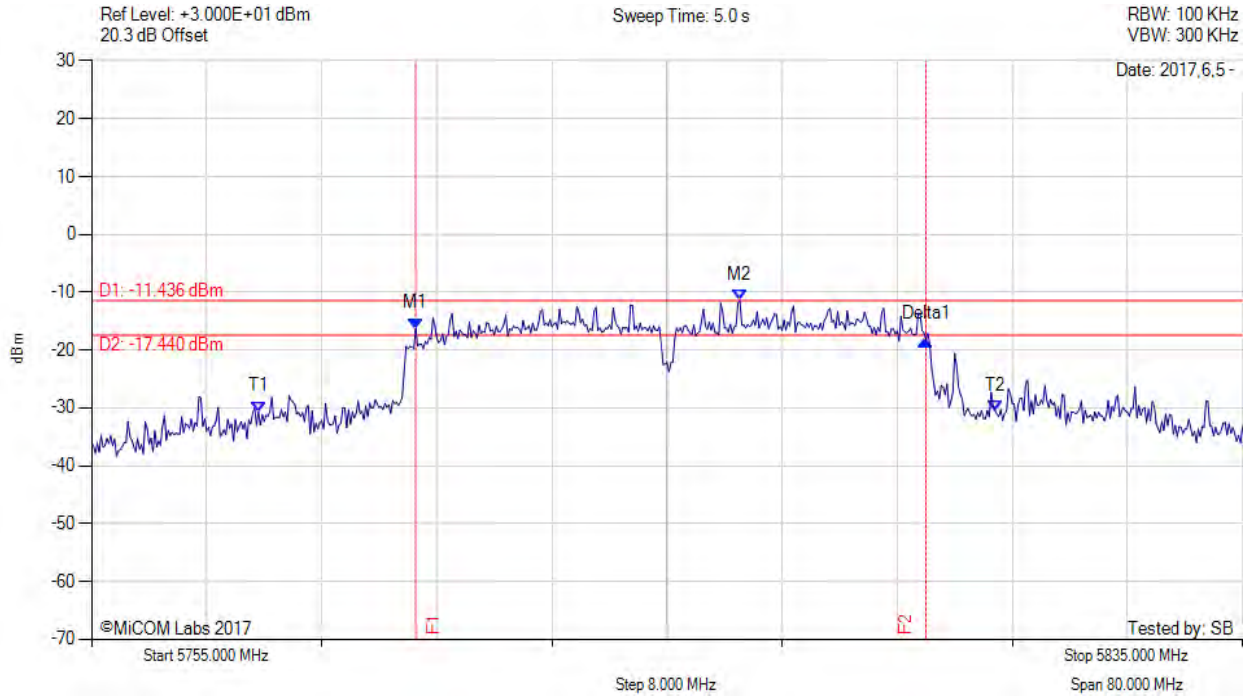


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5777.530 MHz : -16.272 dBm M2 : 5800.070 MHz : -11.436 dBm Delta1 : 35.470 MHz : -1.931 dB T1 : 5766.600 MHz : -30.660 dBm T2 : 5817.800 MHz : -30.428 dBm OBW : 60.087 MHz	Measured 6 dB Bandwidth: 35.470 MHz Measured 99% Bandwidth: 60.087 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### A.3. Power Spectral Density

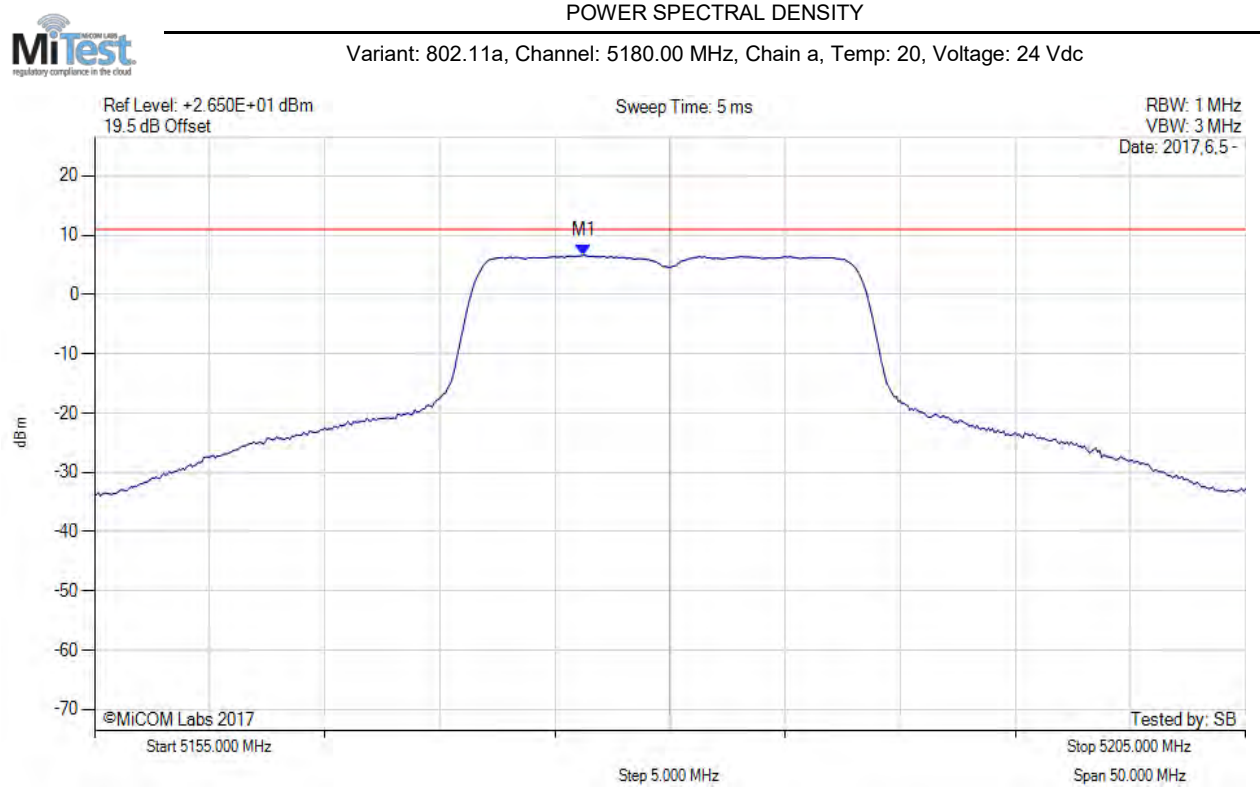

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5176.250 MHz : 6.686 dBm	Limit: $\leq 10.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 73 of 159



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5180.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

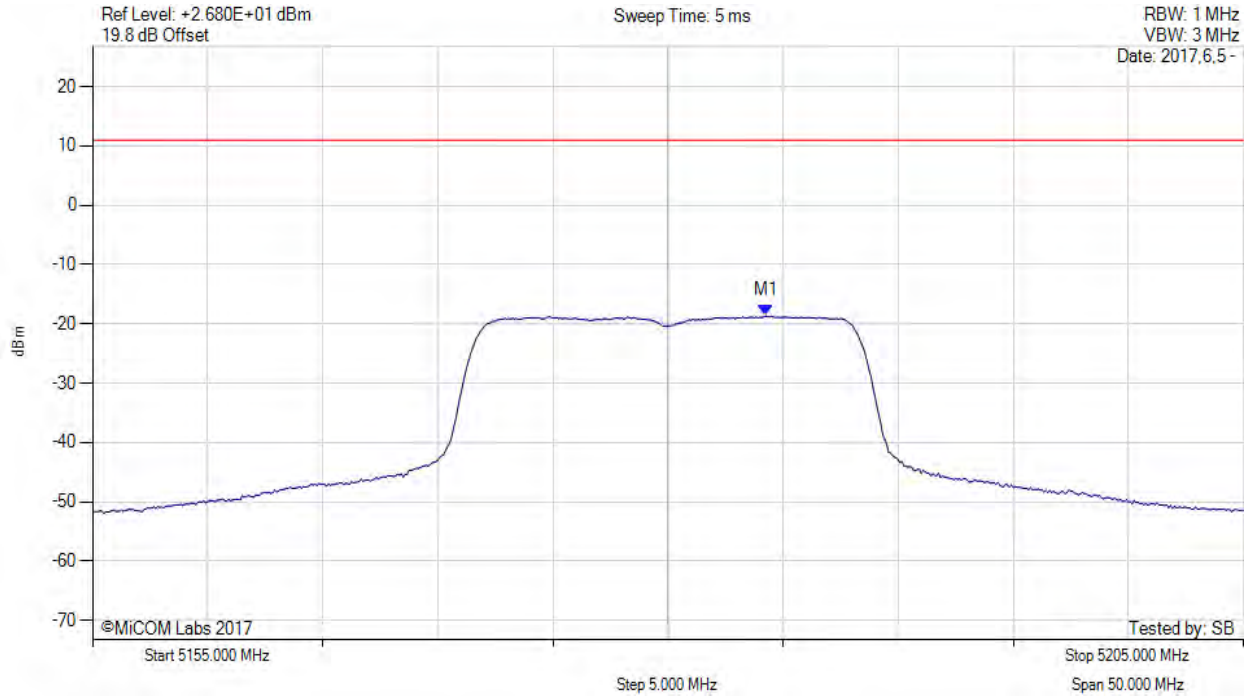

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5184.250 MHz : -18.658 dBm	Limit: ≤ 10.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 74 of 159



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5180.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

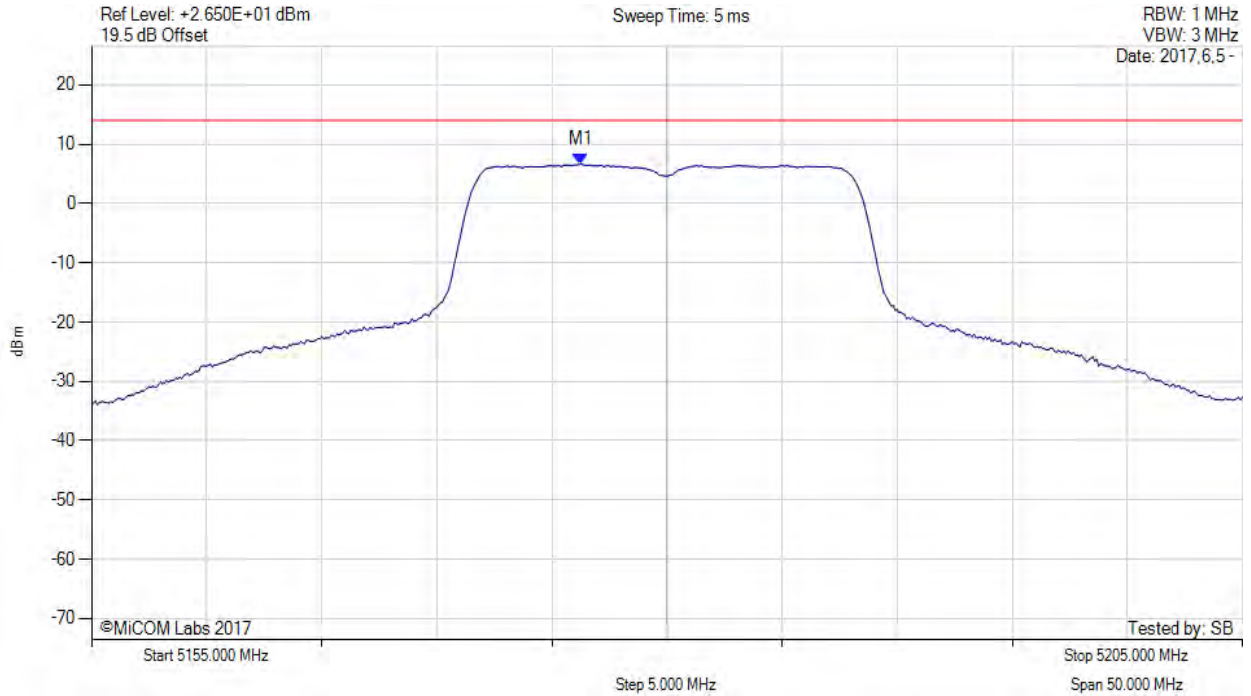

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5176.300 MHz : 6.697 dBm M1 + DCCF : 5176.300 MHz : 6.741 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 14.0$ dBm Margin: -7.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 75 of 159



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5200.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

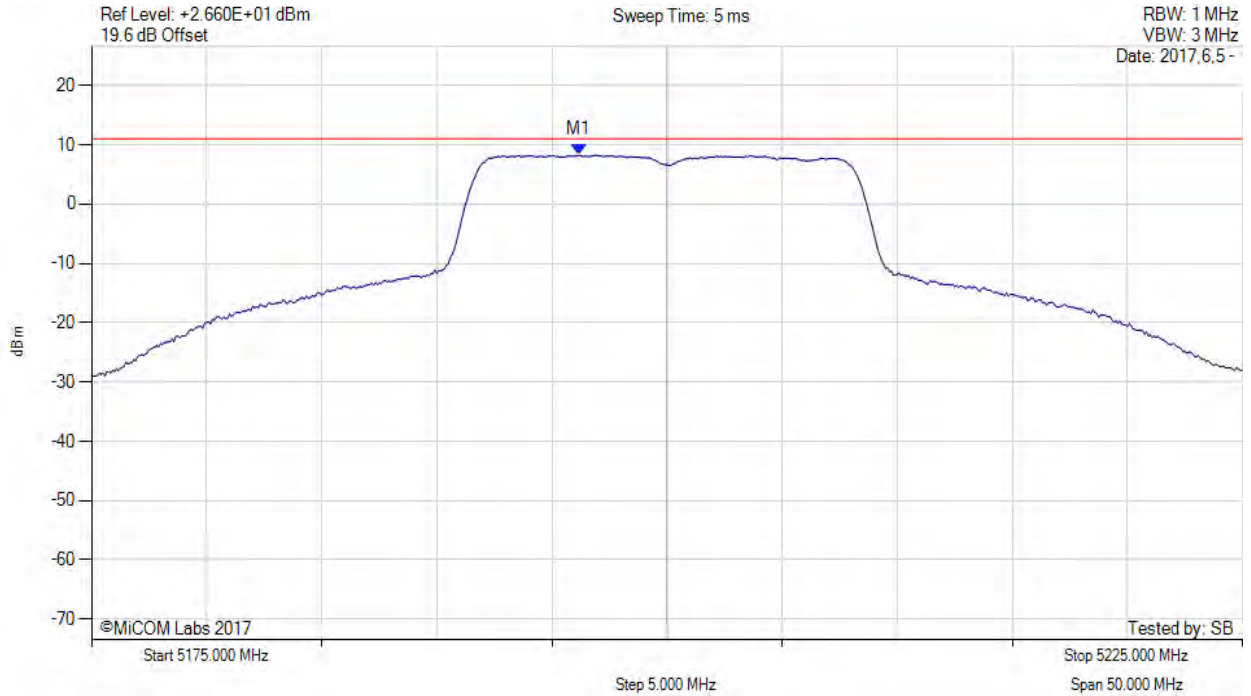

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5196.170 MHz : 8.251 dBm	Limit: ≤ 10.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 76 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5200.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

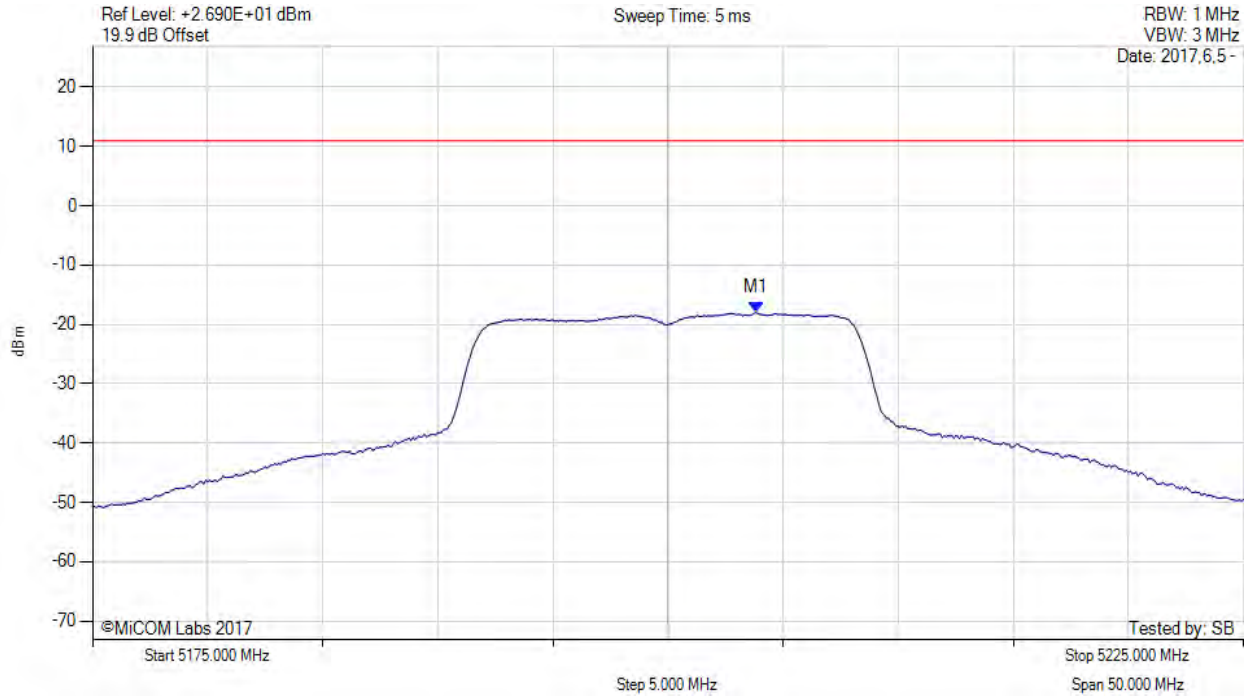

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5203.830 MHz : -18.005 dBm	Channel Frequency: 5200.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 77 of 159



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5200.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

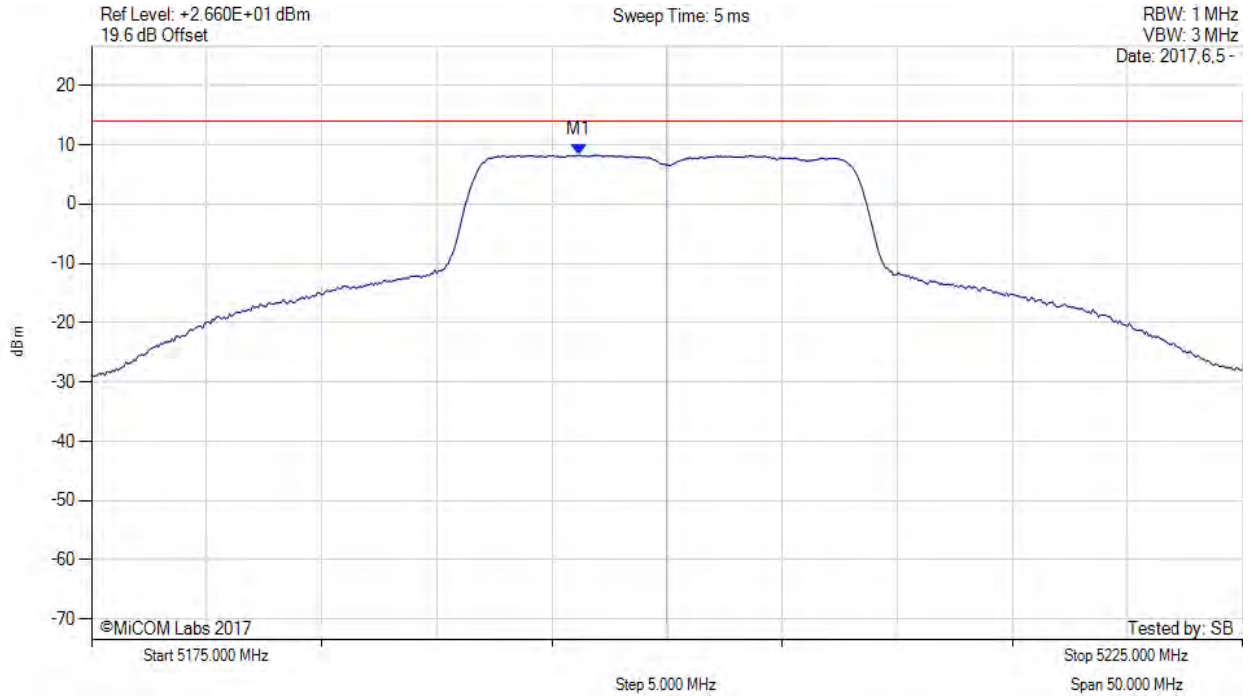

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5196.200 MHz : 8.259 dBm M1 + DCCF : 5196.200 MHz : 8.303 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 14.0$ dBm Margin: -5.7 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 78 of 159



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5240.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

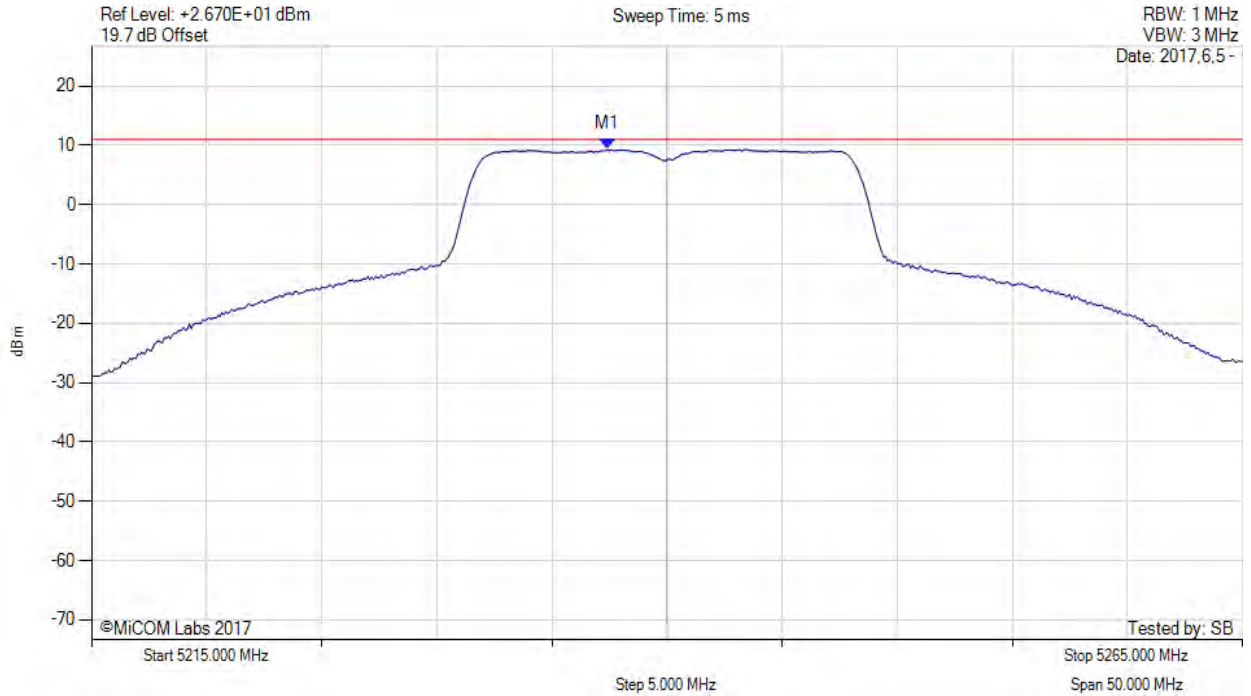

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5237.420 MHz : 9.319 dBm	Limit: $\leq 10.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 79 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5240.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

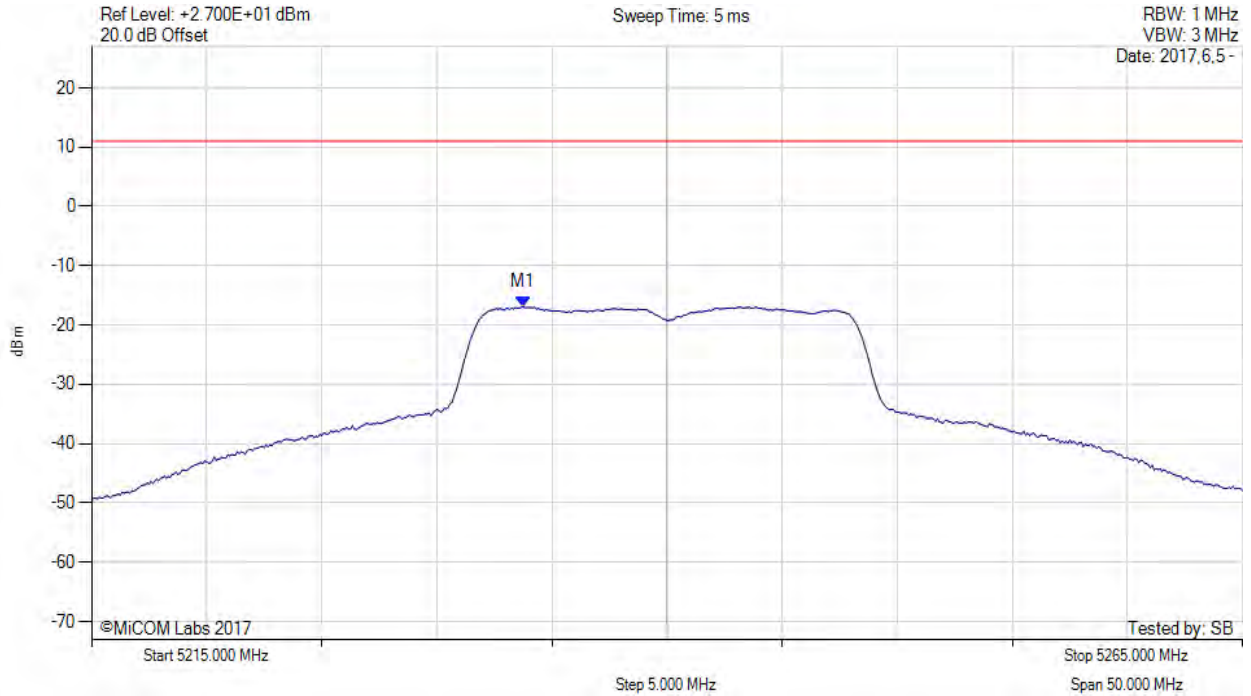

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5233.750 MHz : -16.880 dBm	Limit: $\leq 10.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 80 of 159



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5240.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

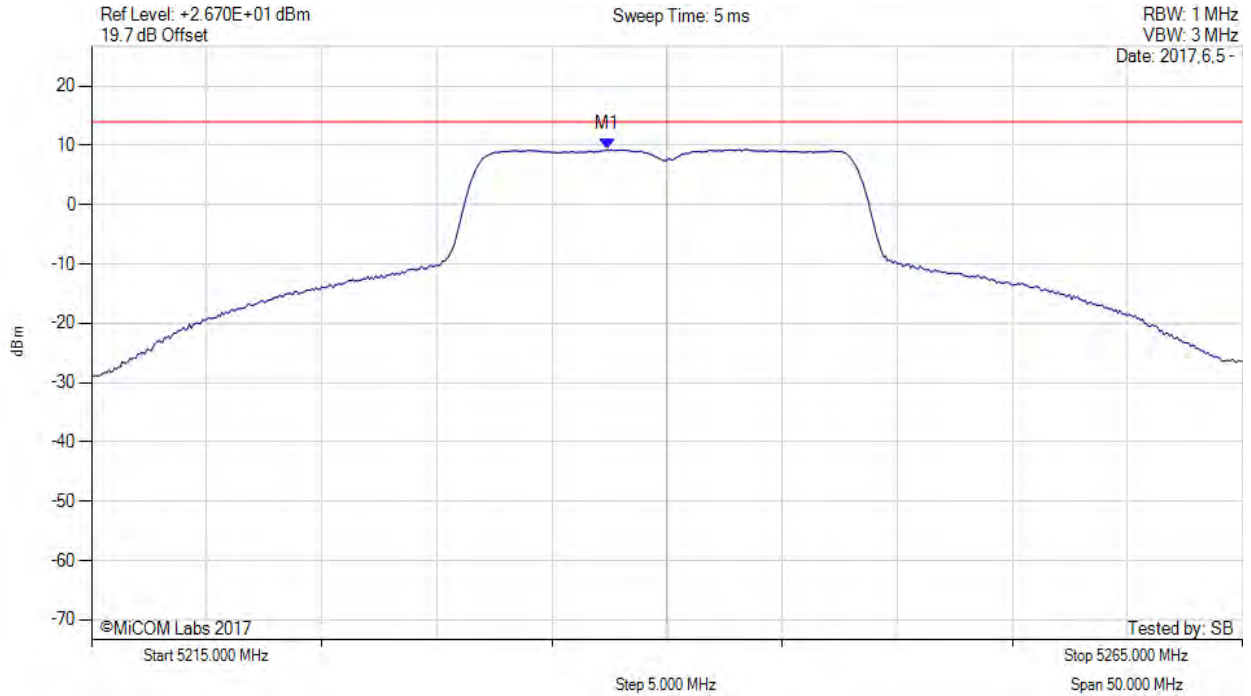

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5237.400 MHz : 9.328 dBm M1 + DCCF : 5237.400 MHz : 9.372 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 14.0$ dBm Margin: -4.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 81 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

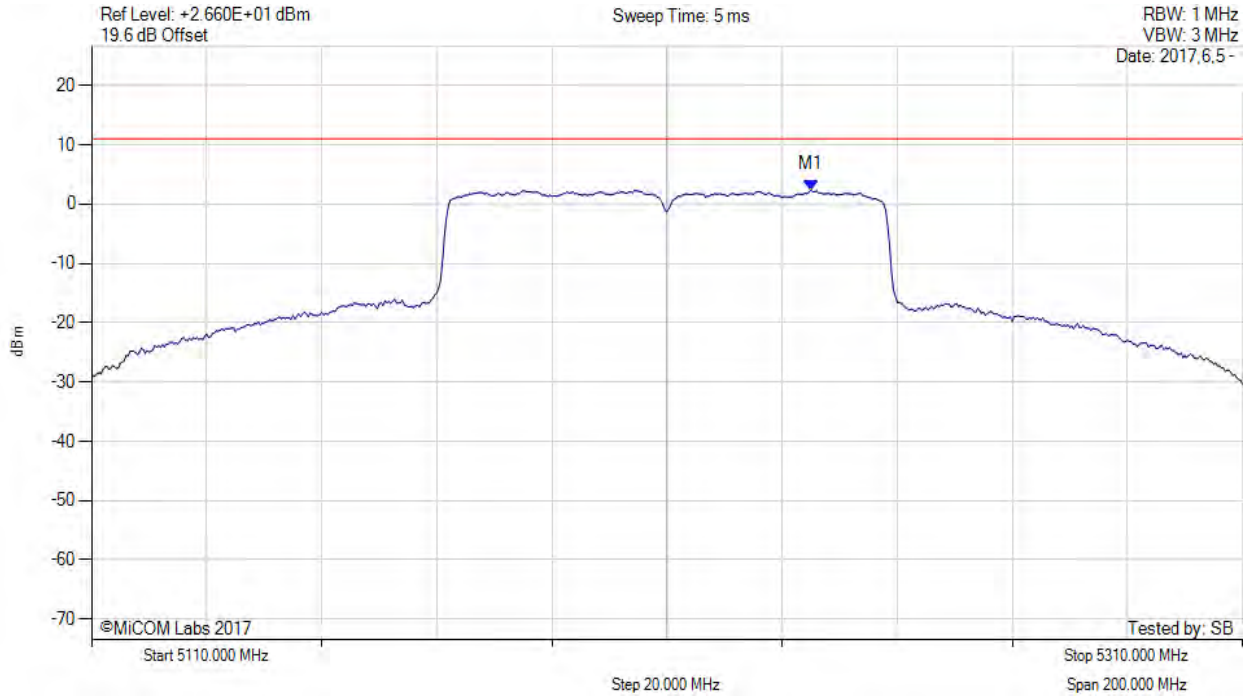

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5235.000 MHz : 2.370 dBm	Limit: $\leq 10.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 82 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

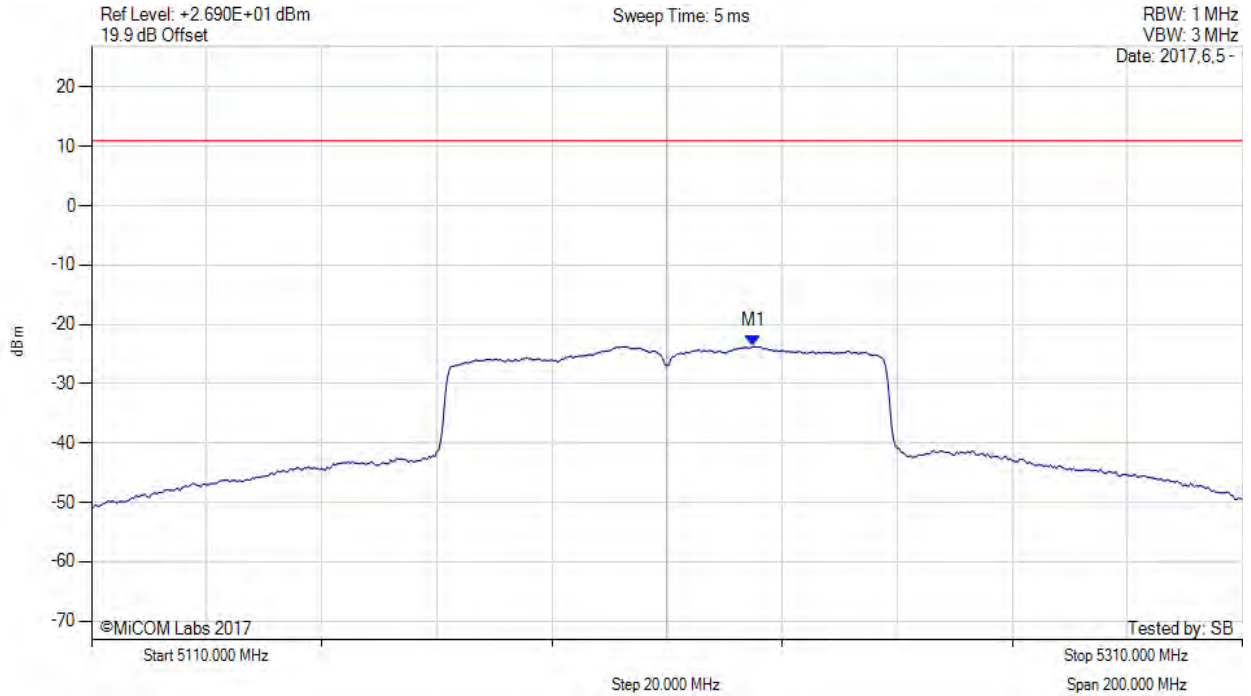

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5225.000 MHz : -23.709 dBm	Limit: $\leq 10.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 83 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5210.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

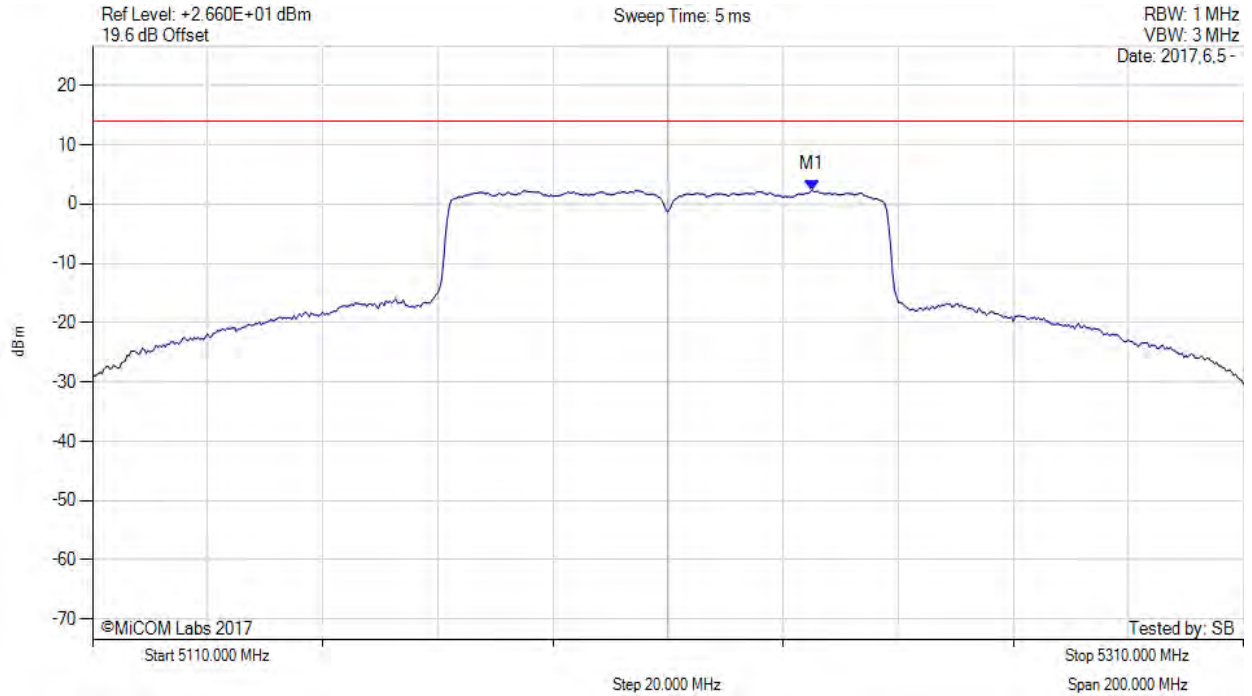

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5235.000 MHz : 2.378 dBm M1 + DCCF : 5235.000 MHz : 2.836 dBm Duty Cycle Correction Factor : +0.46 dB	Limit: $\leq 14.0$ dBm Margin: -11.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 84 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

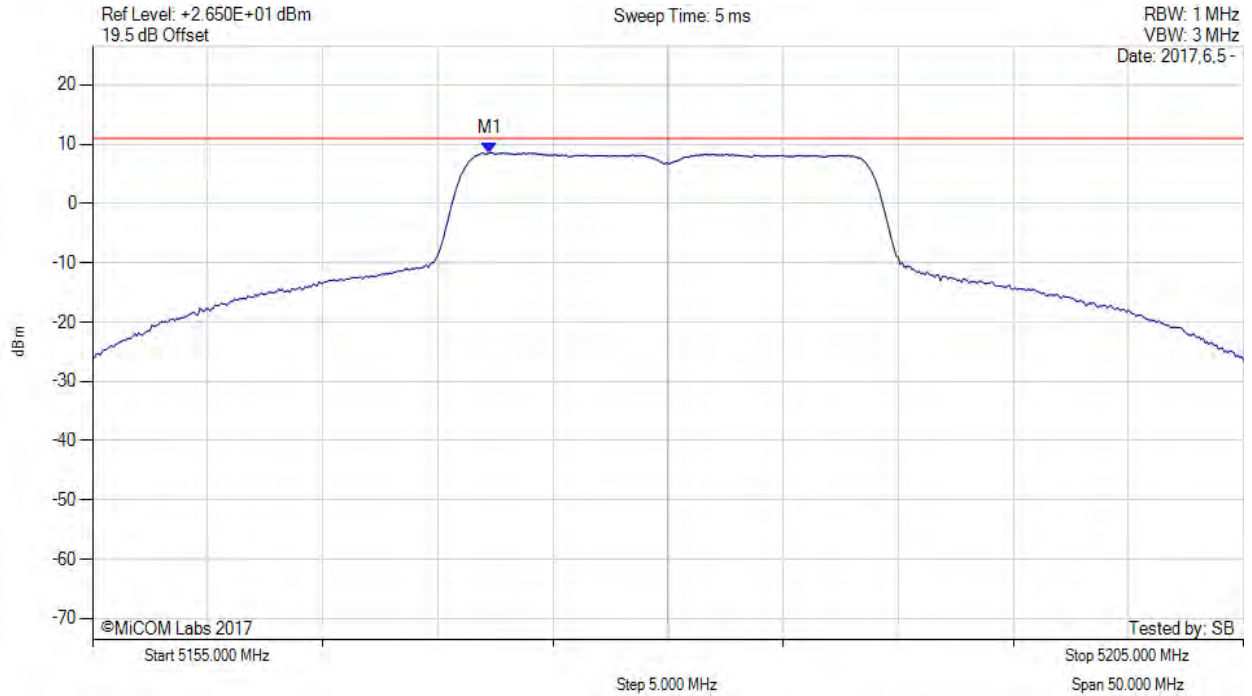

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5172.250 MHz : 8.568 dBm	Limit: $\leq 10.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 85 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

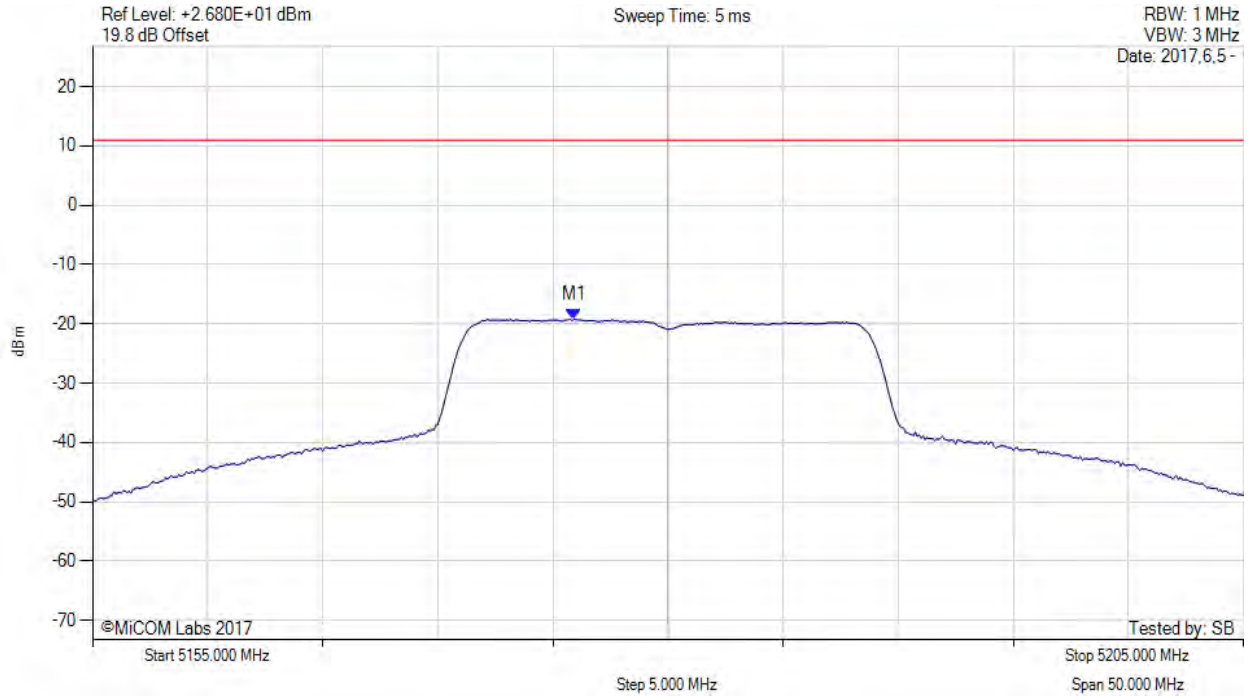

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5175.920 MHz : -19.179 dBm	Limit: ≤ 10.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 86 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5180.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

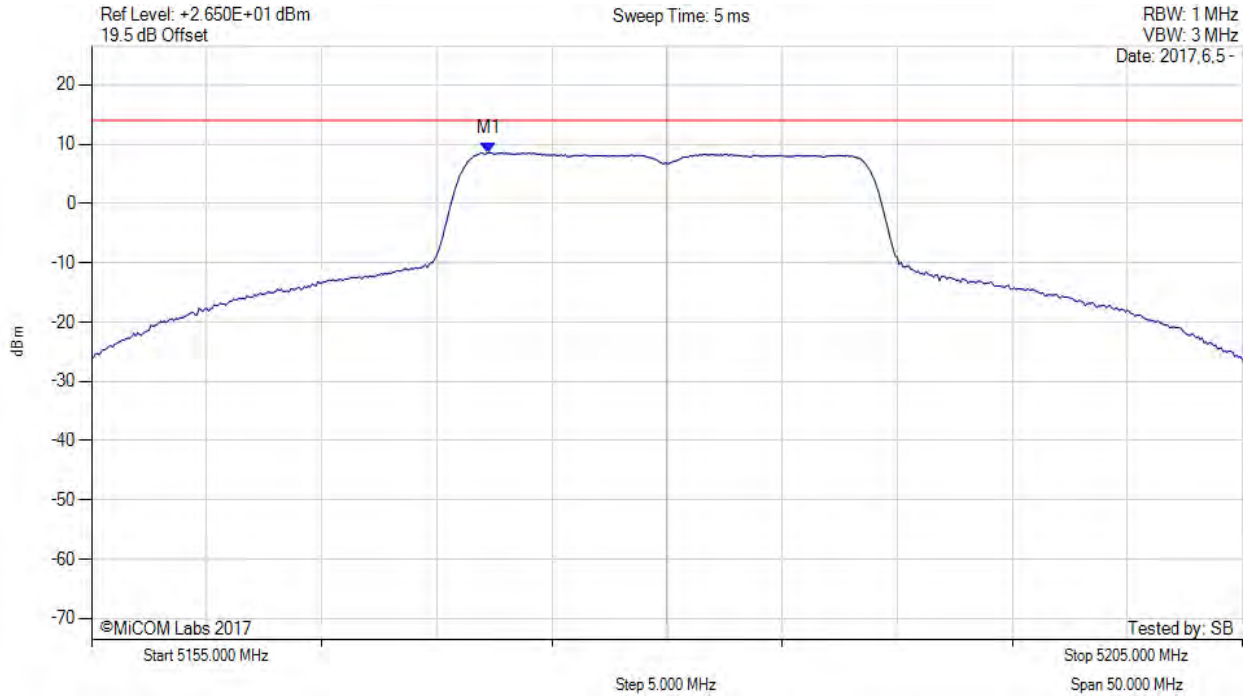

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5172.300 MHz : 8.575 dBm M1 + DCCF : 5172.300 MHz : 8.619 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 14.0$ dBm Margin: -5.4 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 87 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

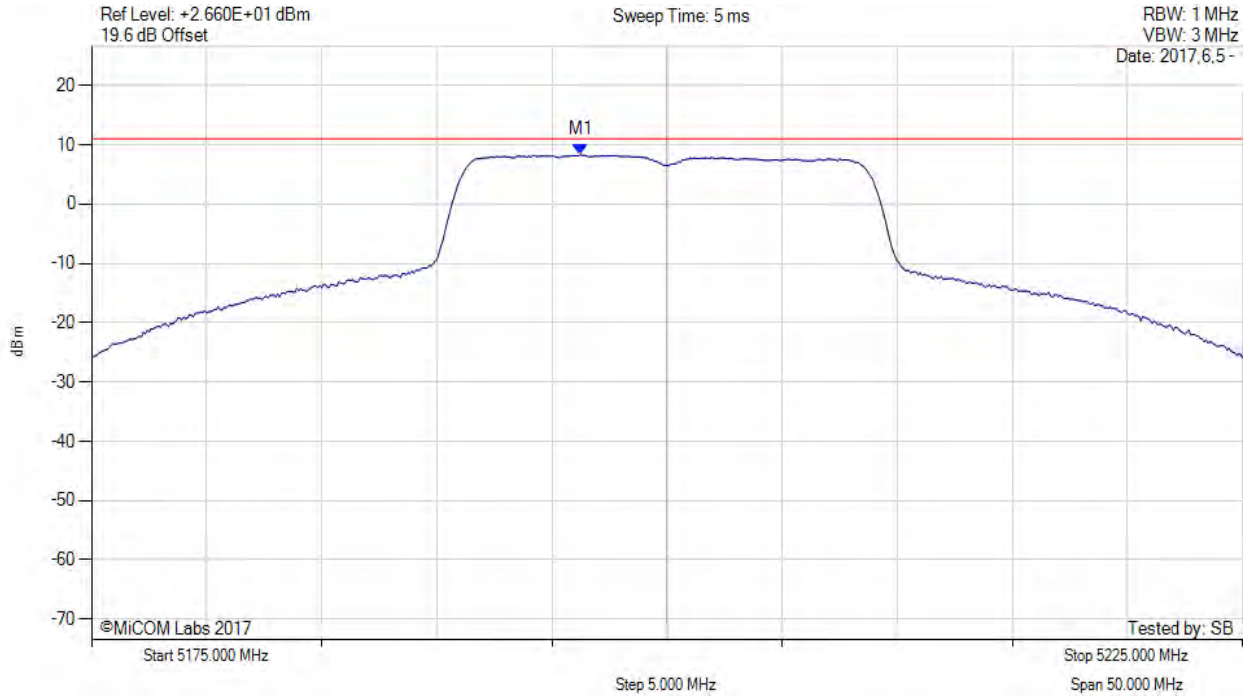

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5196.250 MHz : 8.346 dBm	Limit: ≤ 10.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 88 of 159



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

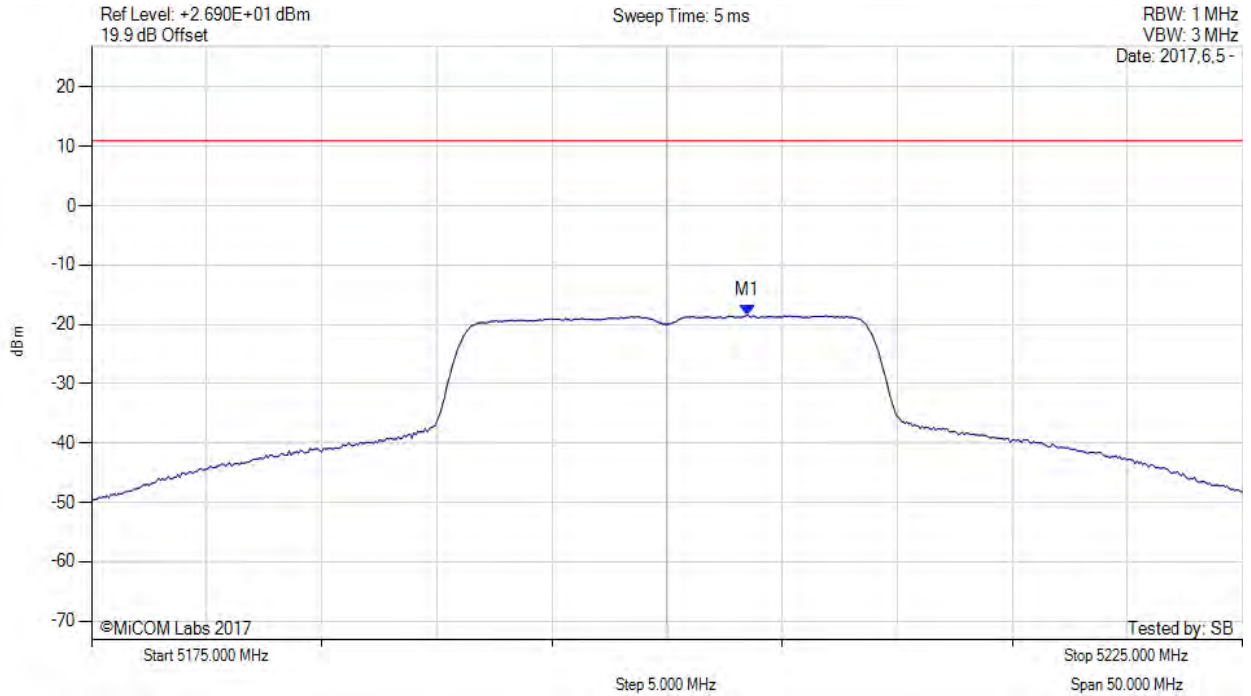

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5203.500 MHz : -18.405 dBm	Channel Frequency: 5200.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 89 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5200.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

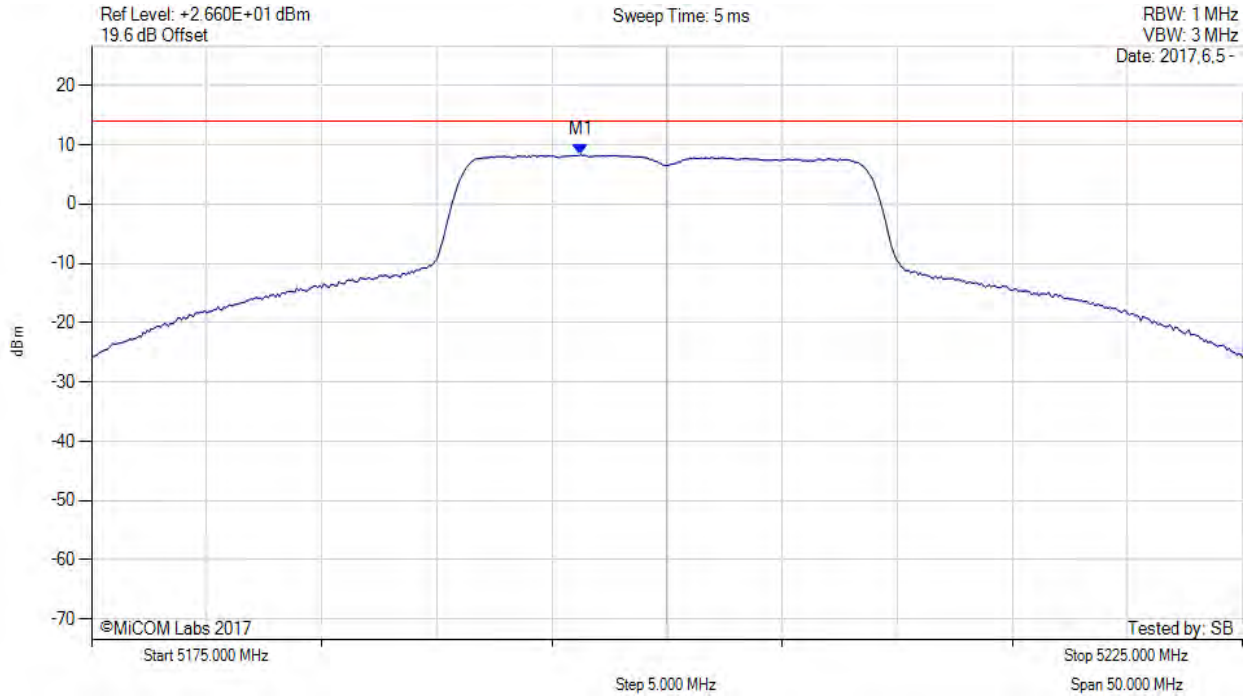

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5196.300 MHz : 8.354 dBm M1 + DCCF : 5196.300 MHz : 8.398 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 14.0$ dBm Margin: -5.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 90 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

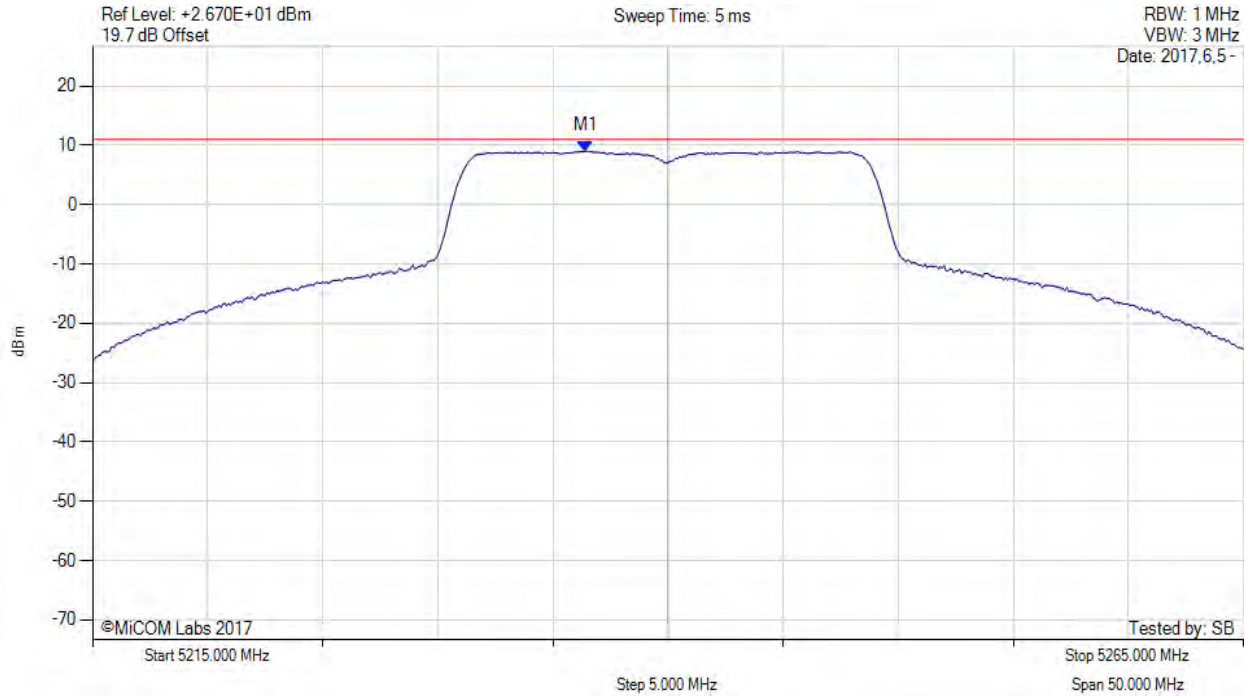

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5236.420 MHz : 9.033 dBm	Limit: $\leq 10.990$ dBm


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

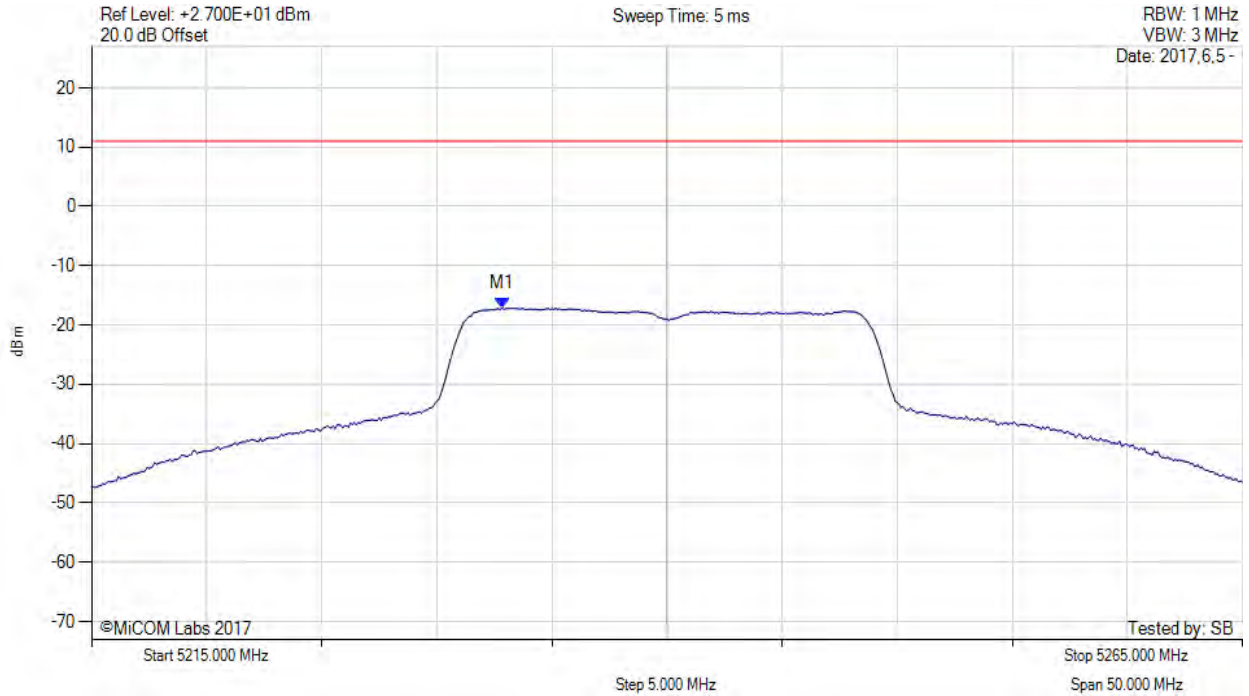

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5232.830 MHz : -17.121 dBm	Limit: ≤ 10.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 92 of 159



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5240.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

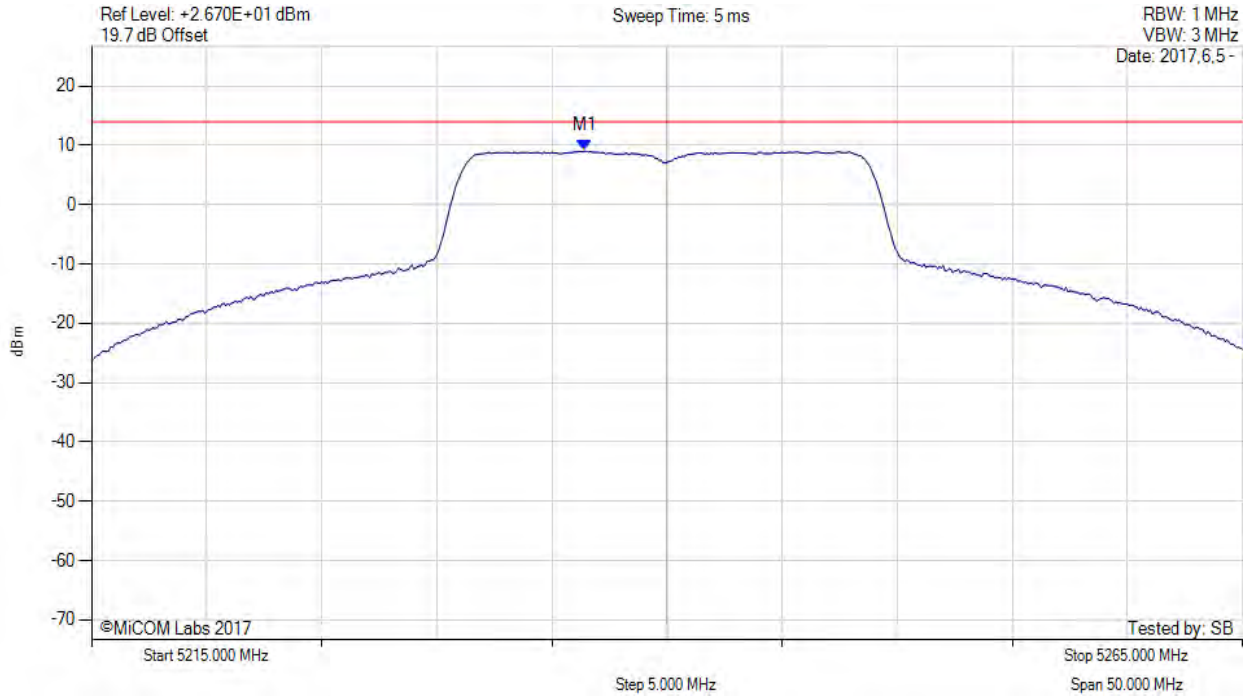

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5236.400 MHz : 9.043 dBm M1 + DCCF : 5236.400 MHz : 9.087 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 14.0$ dBm Margin: -4.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 93 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

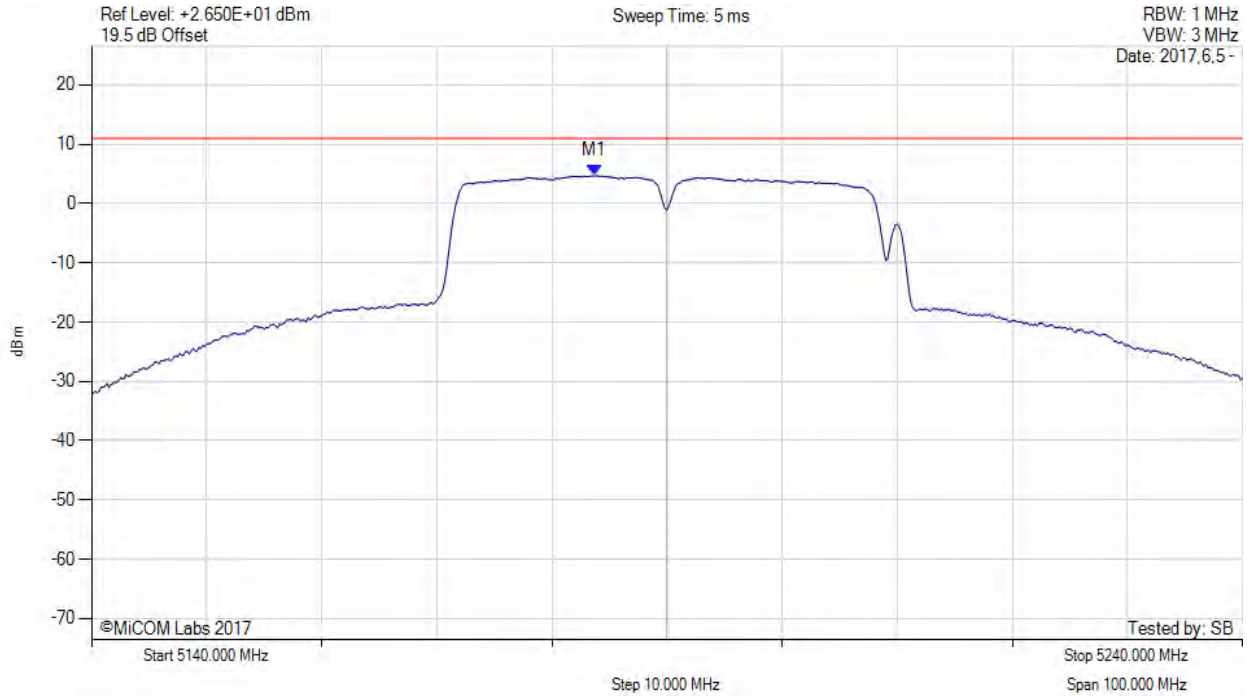

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5183.670 MHz : 4.705 dBm	Limit: $\leq 10.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 94 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

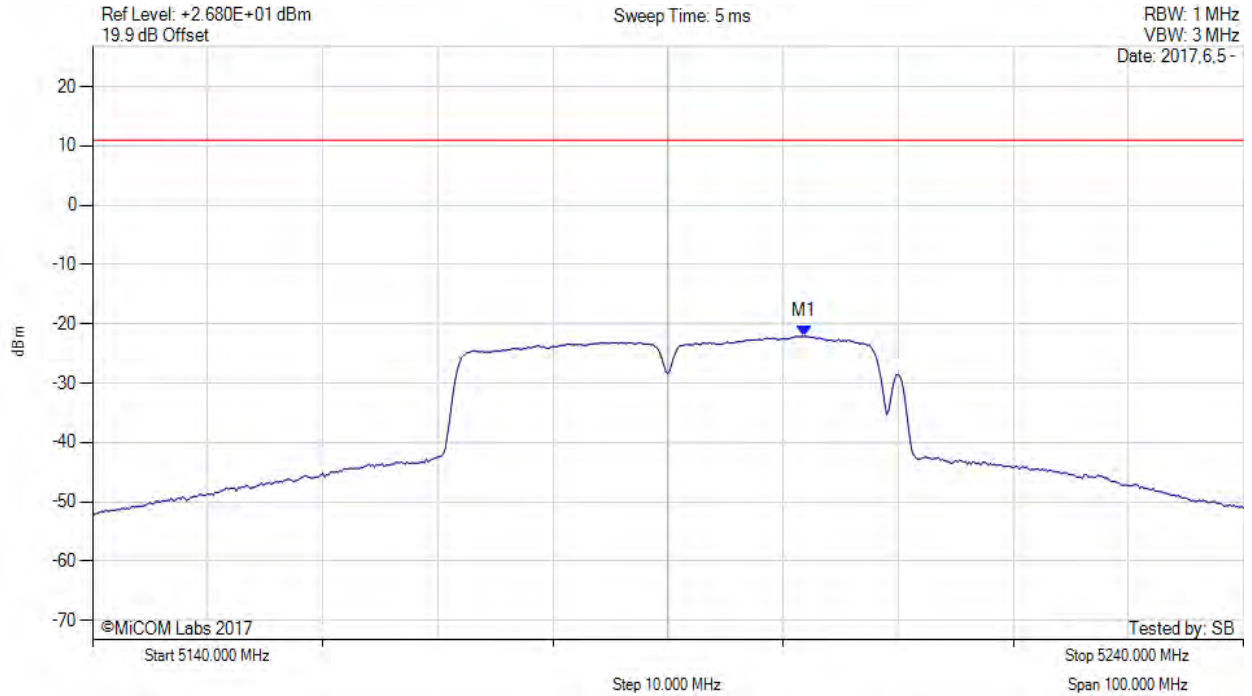

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5201.830 MHz : -22.110 dBm	Limit: $\leq 10.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 95 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5190.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

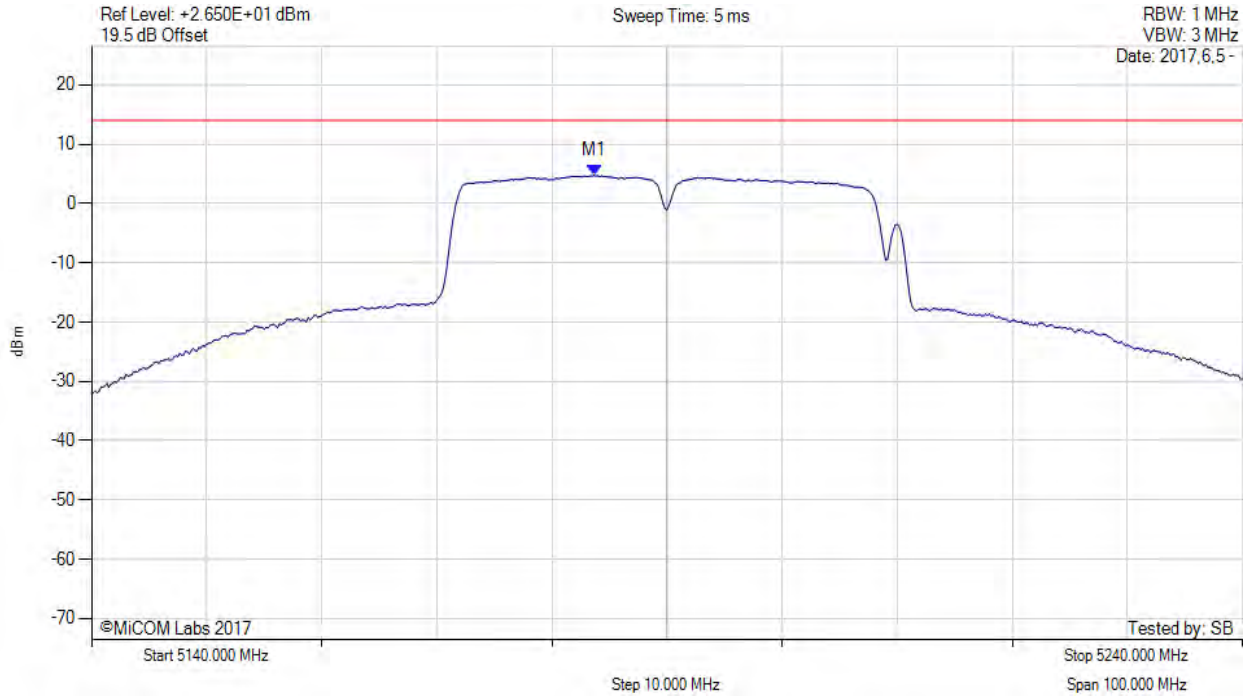

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5183.700 MHz : 4.712 dBm M1 + DCCF : 5183.700 MHz : 4.756 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 14.0$ dBm Margin: -9.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 96 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

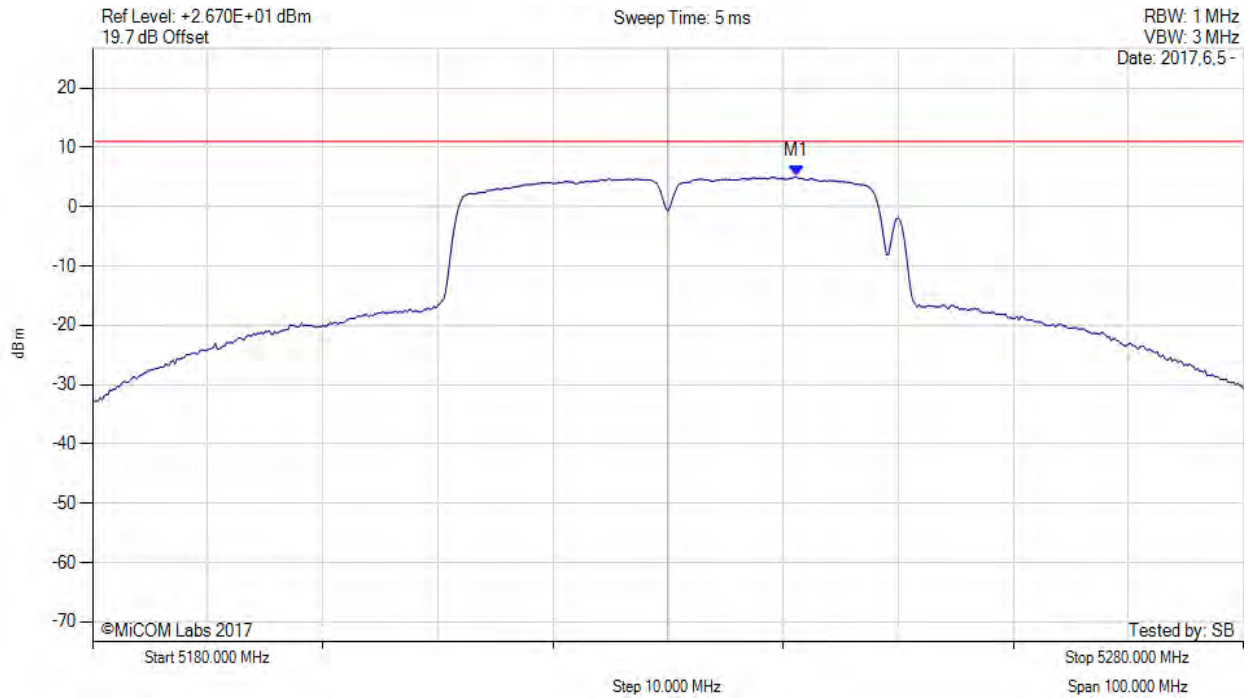

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5241.170 MHz : 5.071 dBm	Limit: $\leq 10.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 97 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

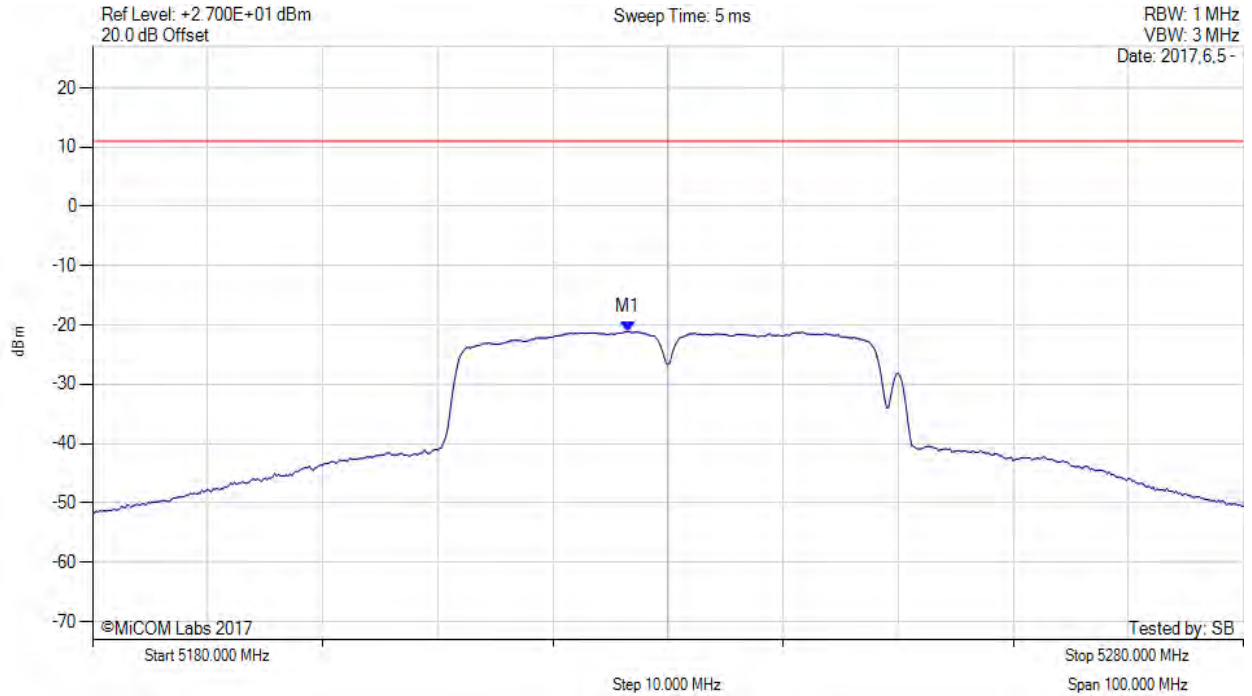

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5226.500 MHz : -21.072 dBm	Limit: $\leq 10.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 98 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5230.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

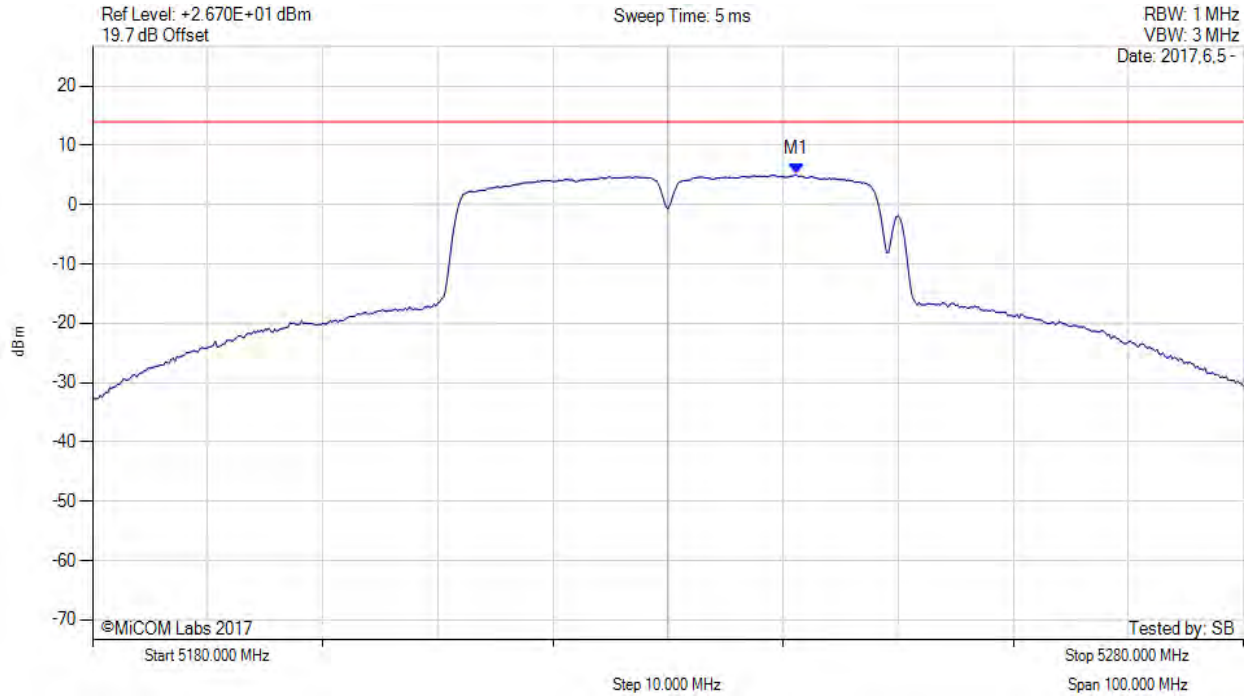

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5241.200 MHz : 5.081 dBm M1 + DCCF : 5241.200 MHz : 5.125 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 14.0$ dBm Margin: -8.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 99 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

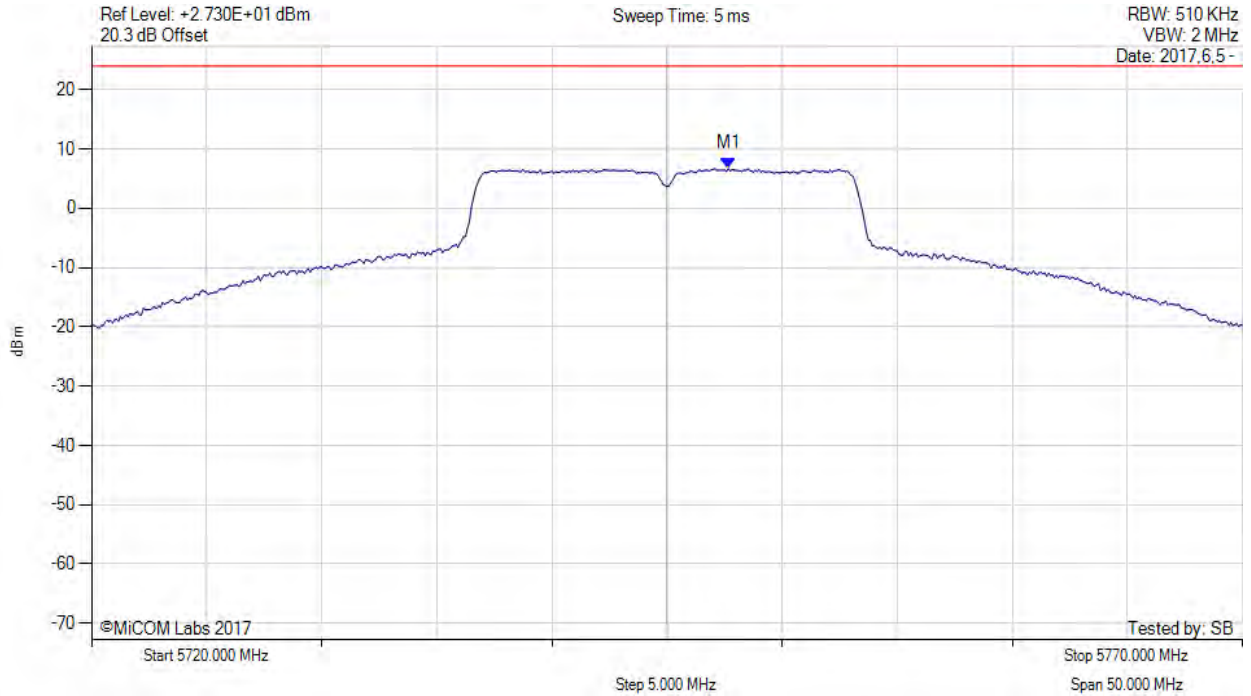

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5747.670 MHz : 6.673 dBm	Limit: ≤ 23.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 100 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

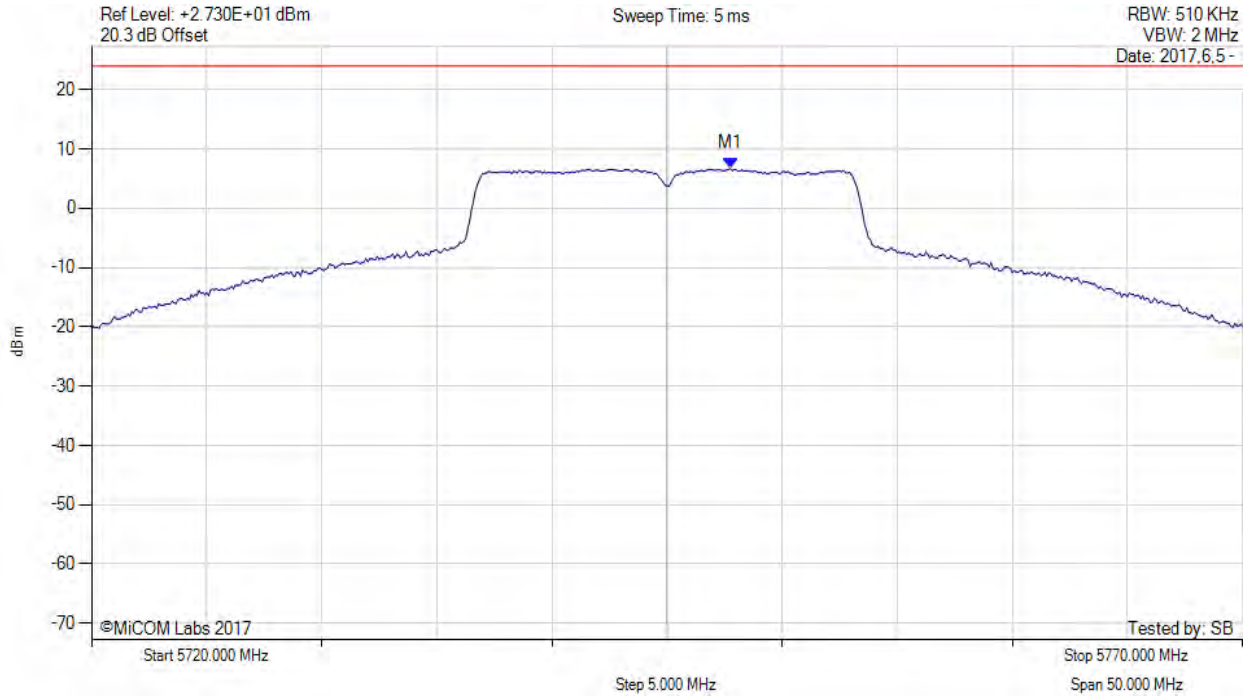

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5747.750 MHz : 6.706 dBm	Channel Frequency: 5745.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 101 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

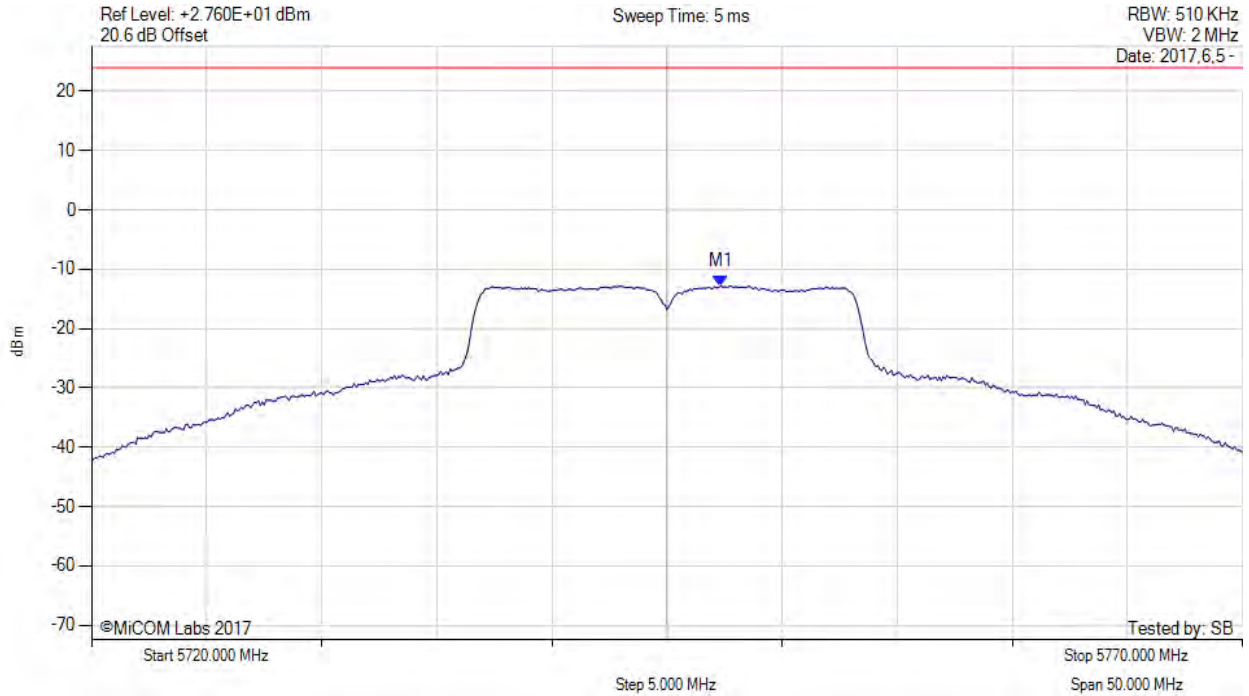

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5747.330 MHz : -12.784 dBm	Limit: $\leq 23.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 102 of 159

POWER SPECTRAL DENSITY



Variants: 802.11a, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

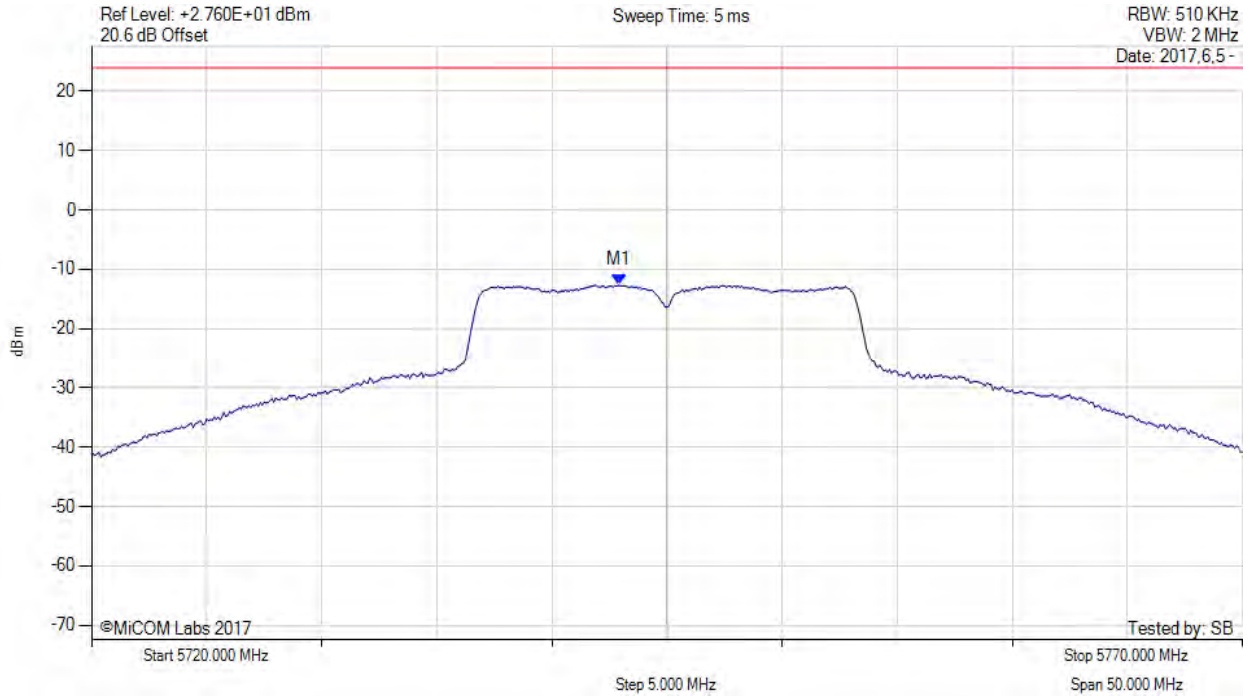

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5742.920 MHz : -12.687 dBm	Channel Frequency: 5745.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 103 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5745.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

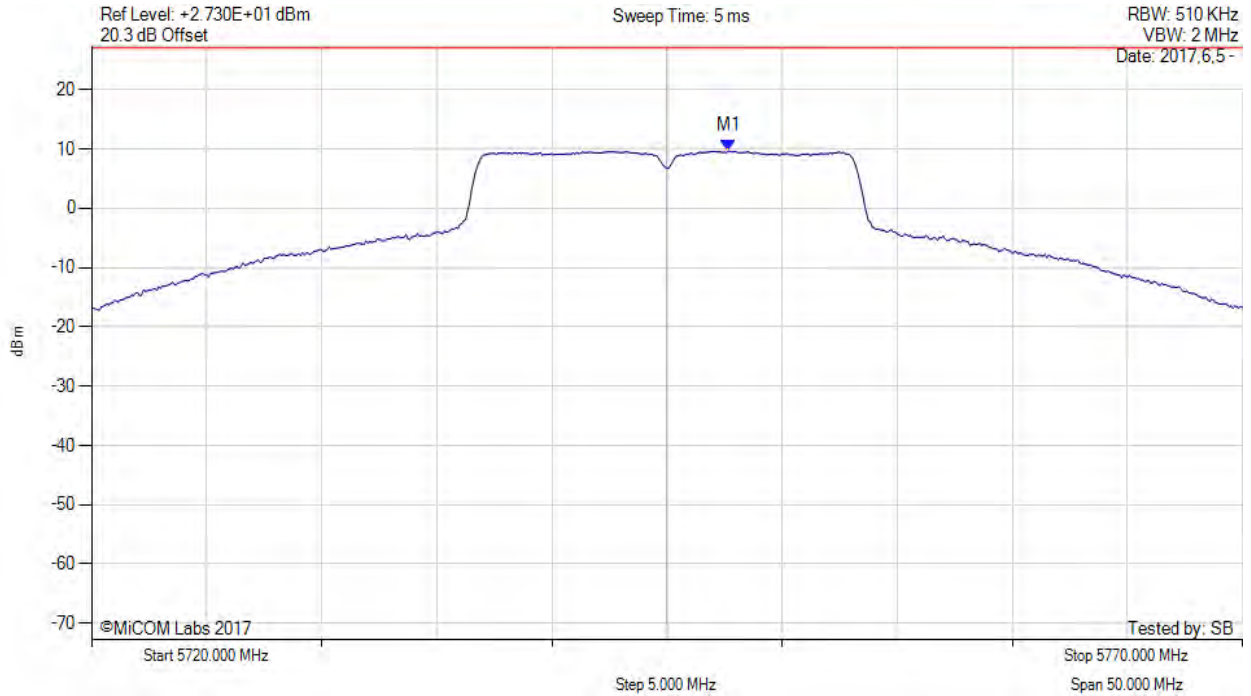

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5747.700 MHz : 9.667 dBm M1 + DCCF : 5747.700 MHz : 9.711 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -17.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 104 of 159



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5745.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

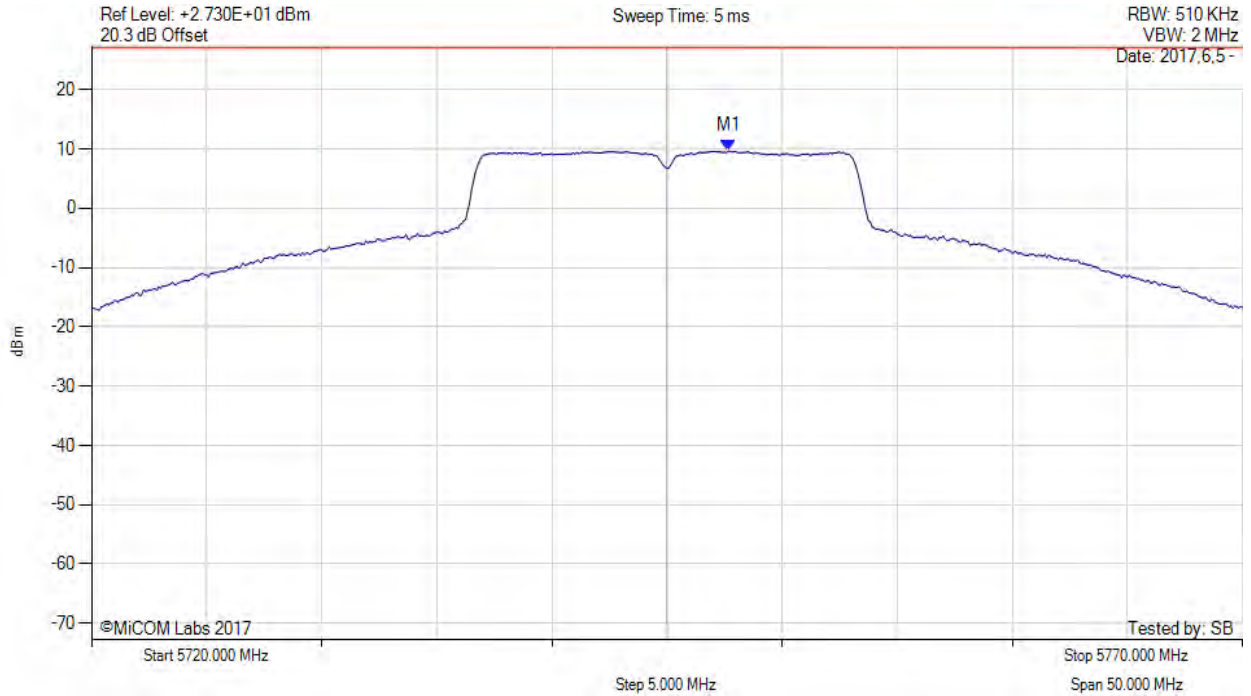

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5747.700 MHz : 9.667 dBm M1 + DCCF : 5747.700 MHz : 9.711 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -17.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 105 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

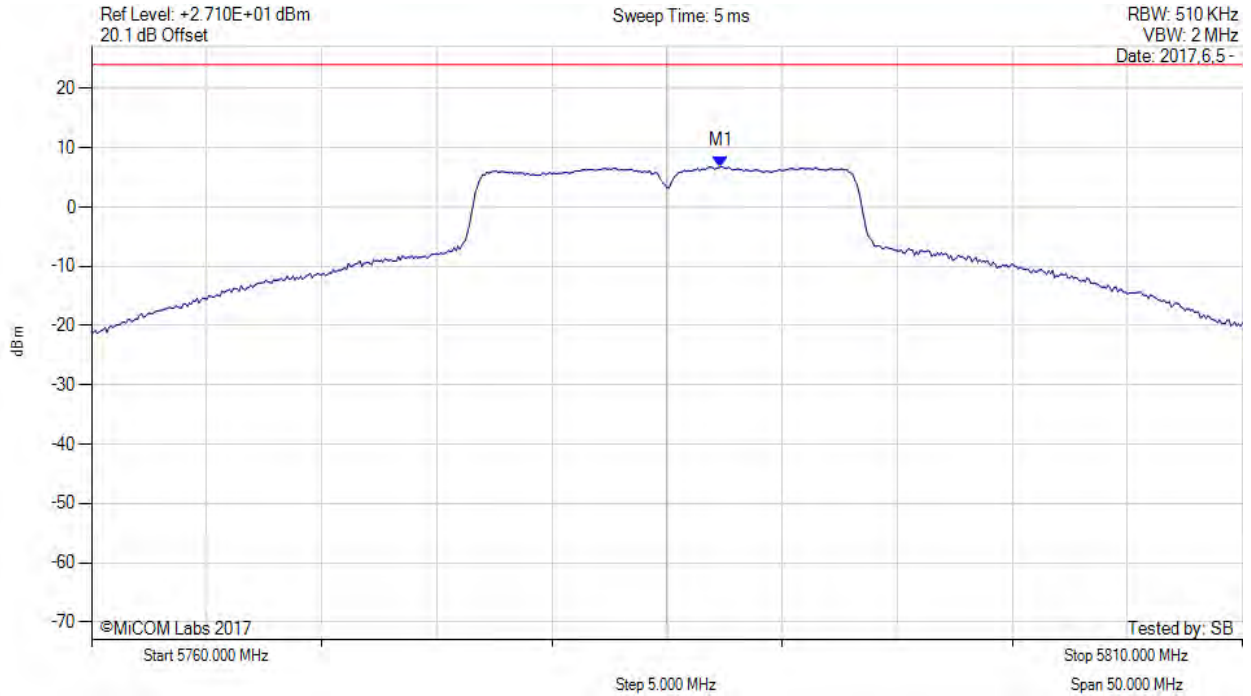

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5787.330 MHz : 6.844 dBm	Limit: $\leq 23.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 106 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

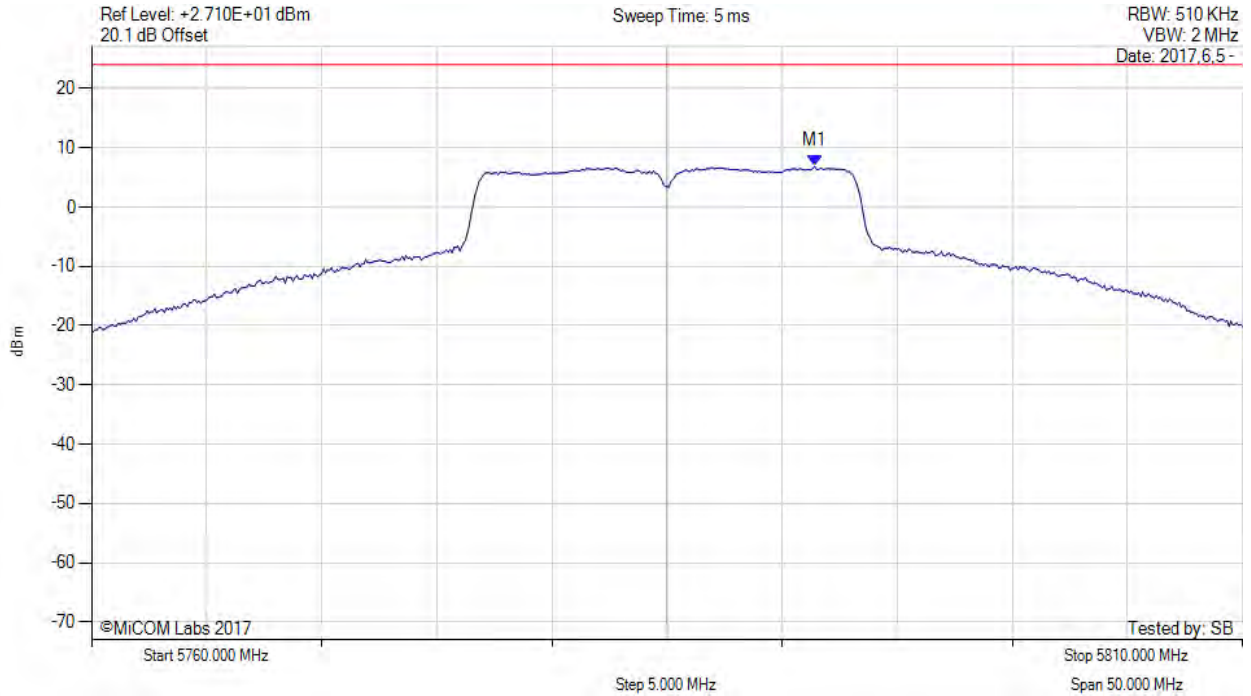

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5791.420 MHz : 6.872 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 107 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

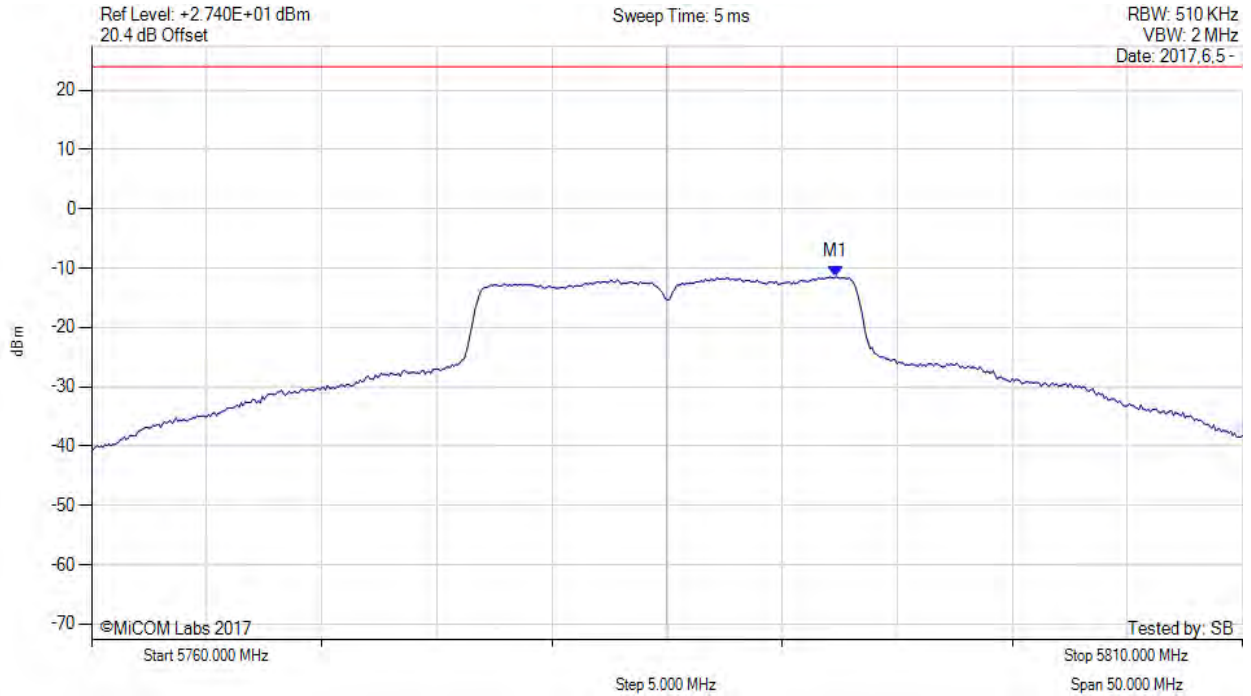

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5792.330 MHz : -11.471 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 108 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

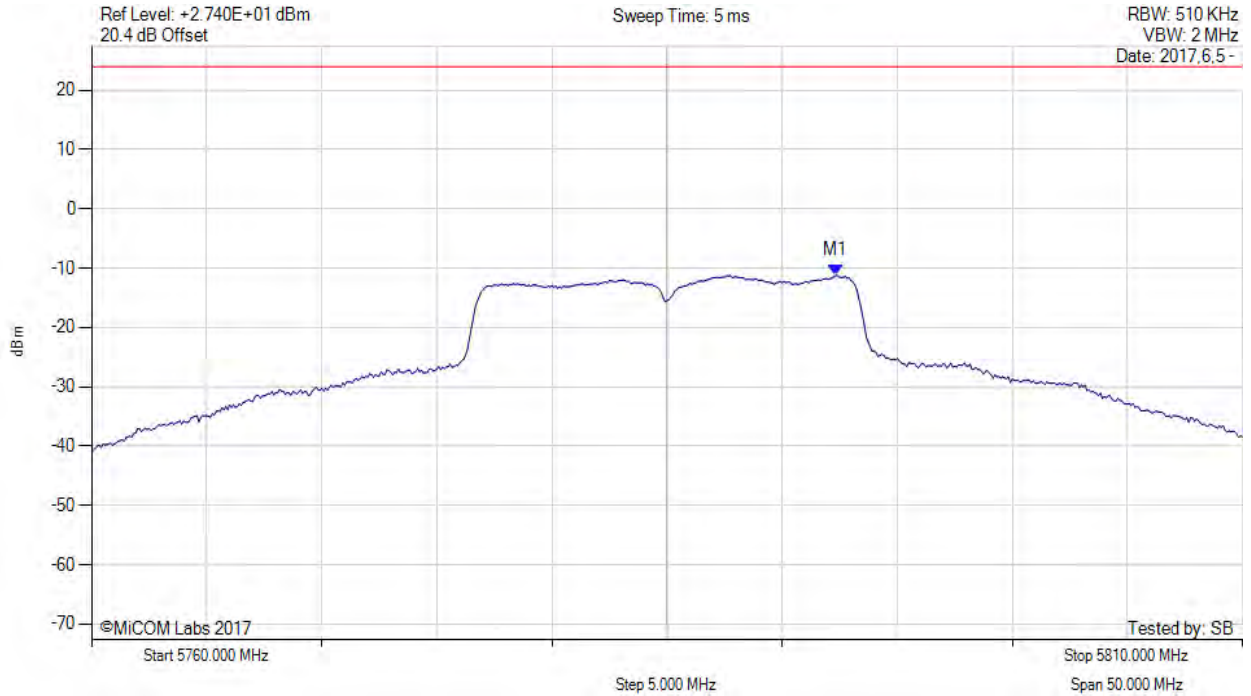

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5792.330 MHz : -11.225 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 109 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

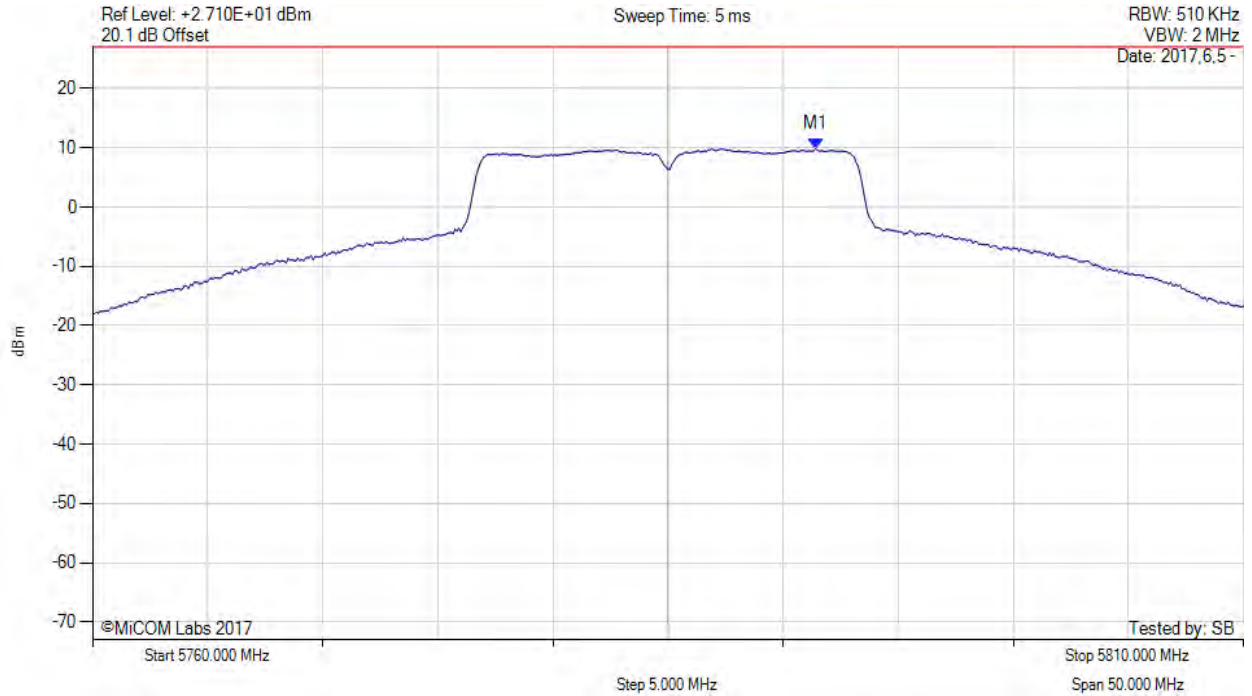

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5791.400 MHz : 9.818 dBm M1 + DCCF : 5791.400 MHz : 9.862 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -17.1 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 110 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

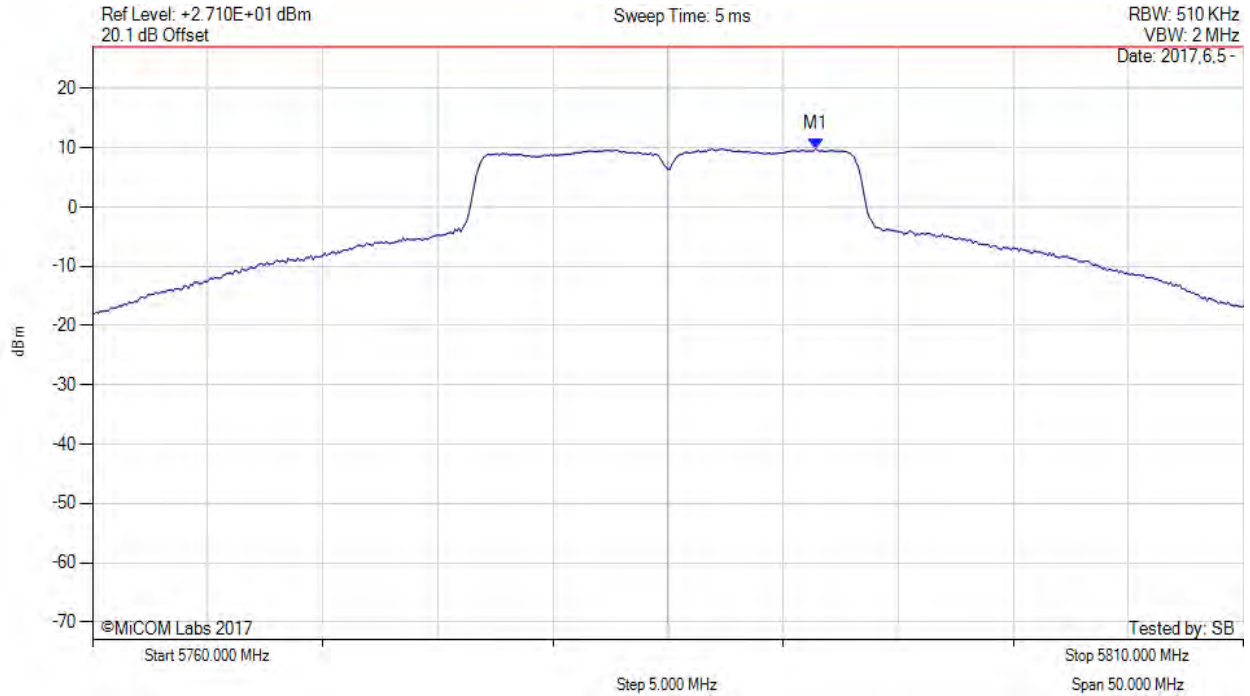

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5791.400 MHz : 9.818 dBm M1 + DCCF : 5791.400 MHz : 9.862 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -17.1 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 111 of 159



POWER SPECTRAL DENSITY

Variants: 802.11a, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

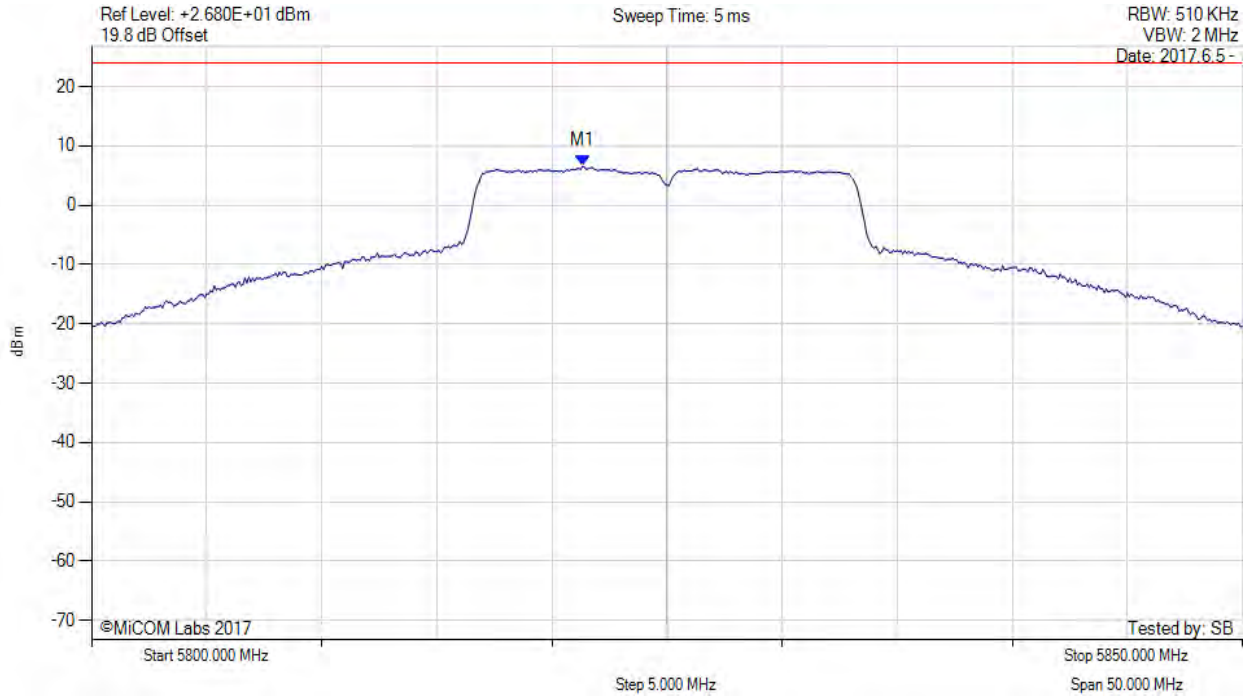

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5821.330 MHz : 6.599 dBm	Limit: $\leq 23.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 112 of 159



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

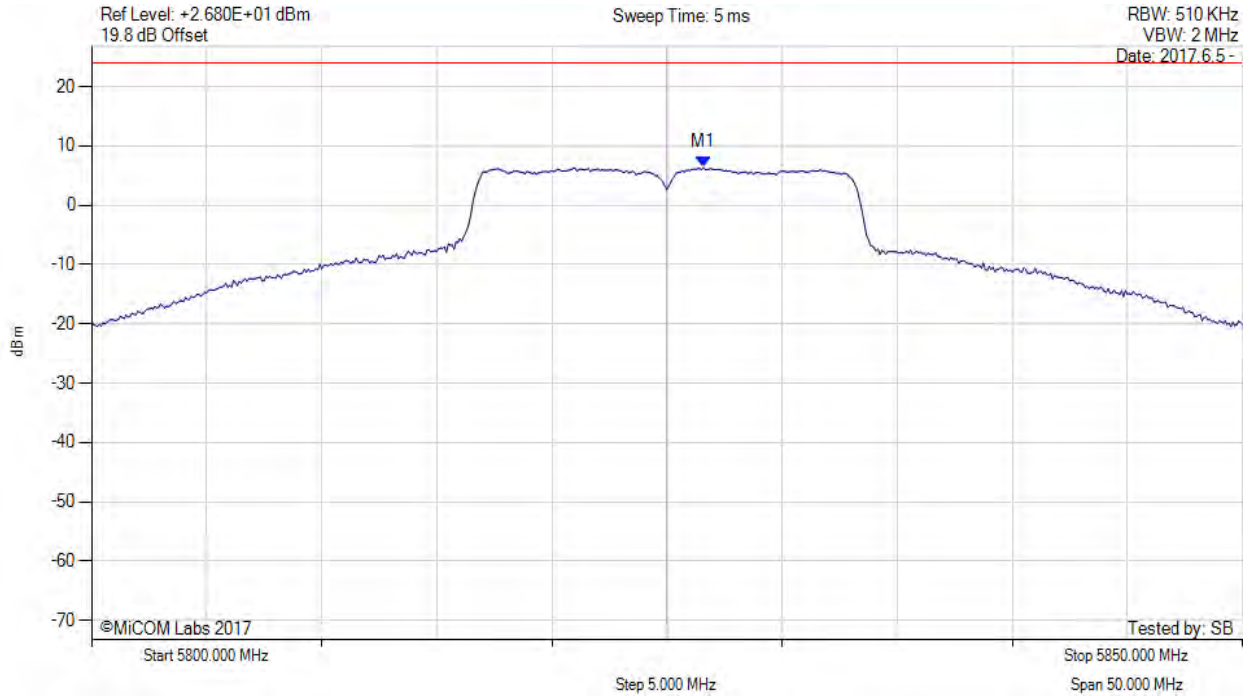

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5826.580 MHz : 6.375 dBm	Channel Frequency: 5825.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 113 of 159



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

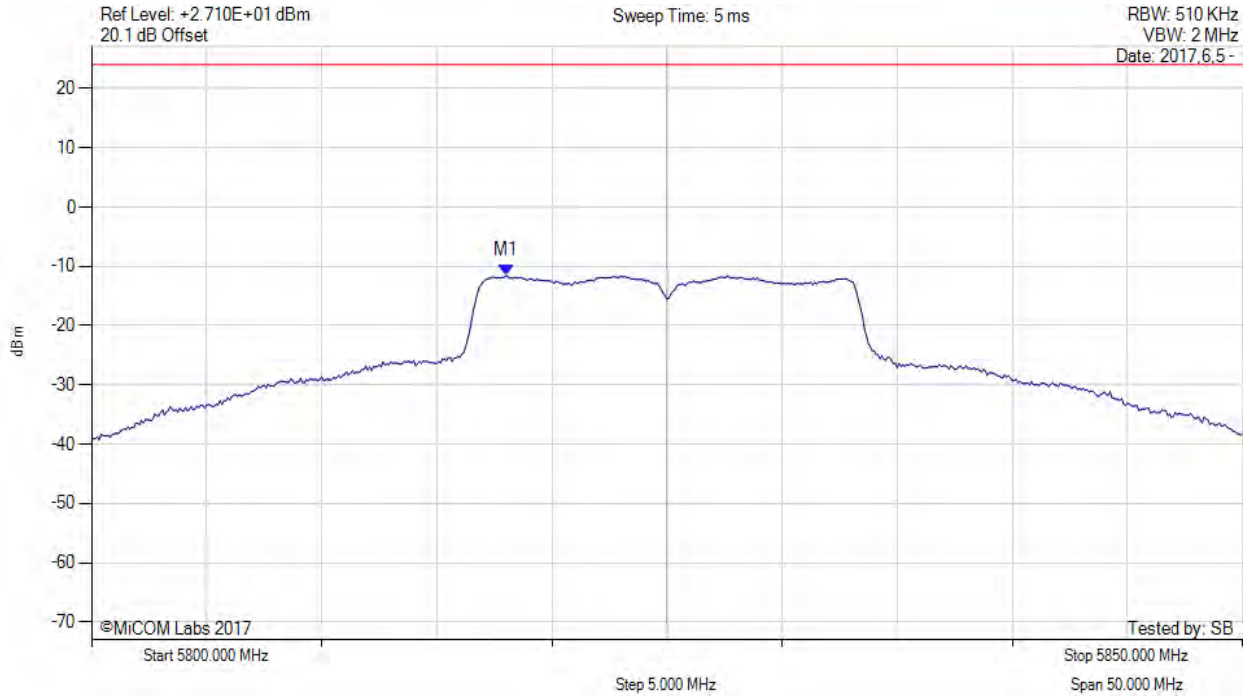

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5818.000 MHz : -11.555 dBm	Limit: $\leq 23.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 114 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

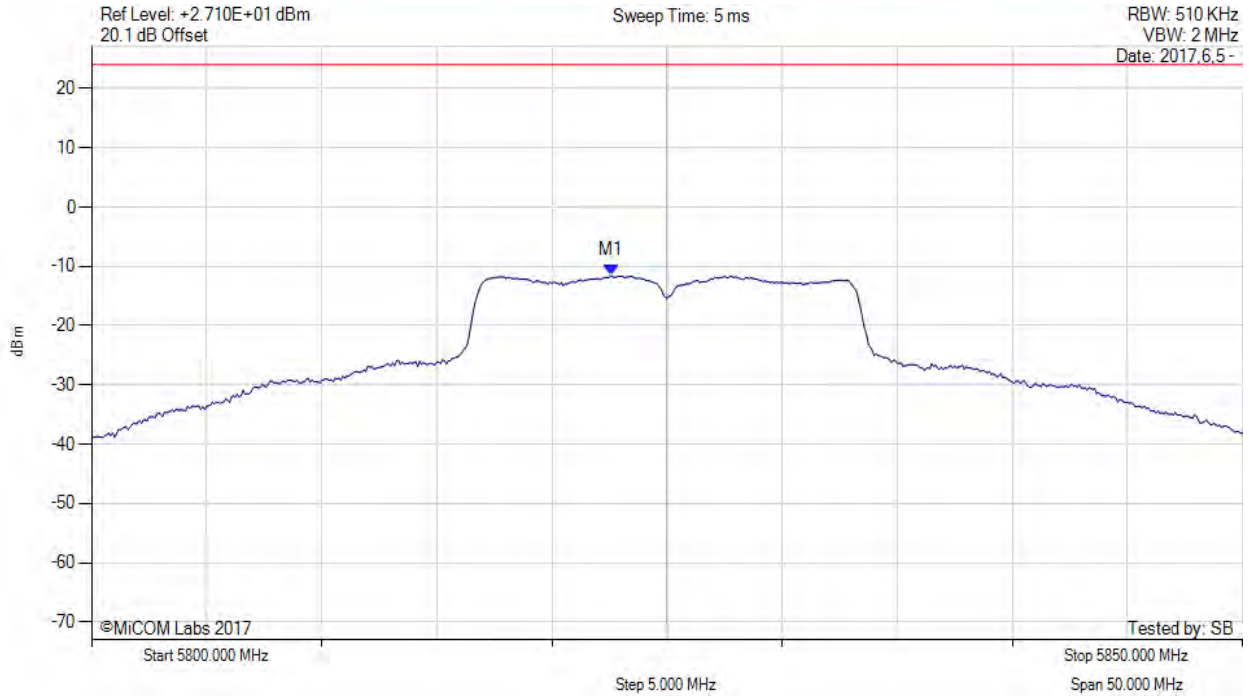

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5822.580 MHz : -11.562 dBm	Channel Frequency: 5825.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 115 of 159



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5825.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

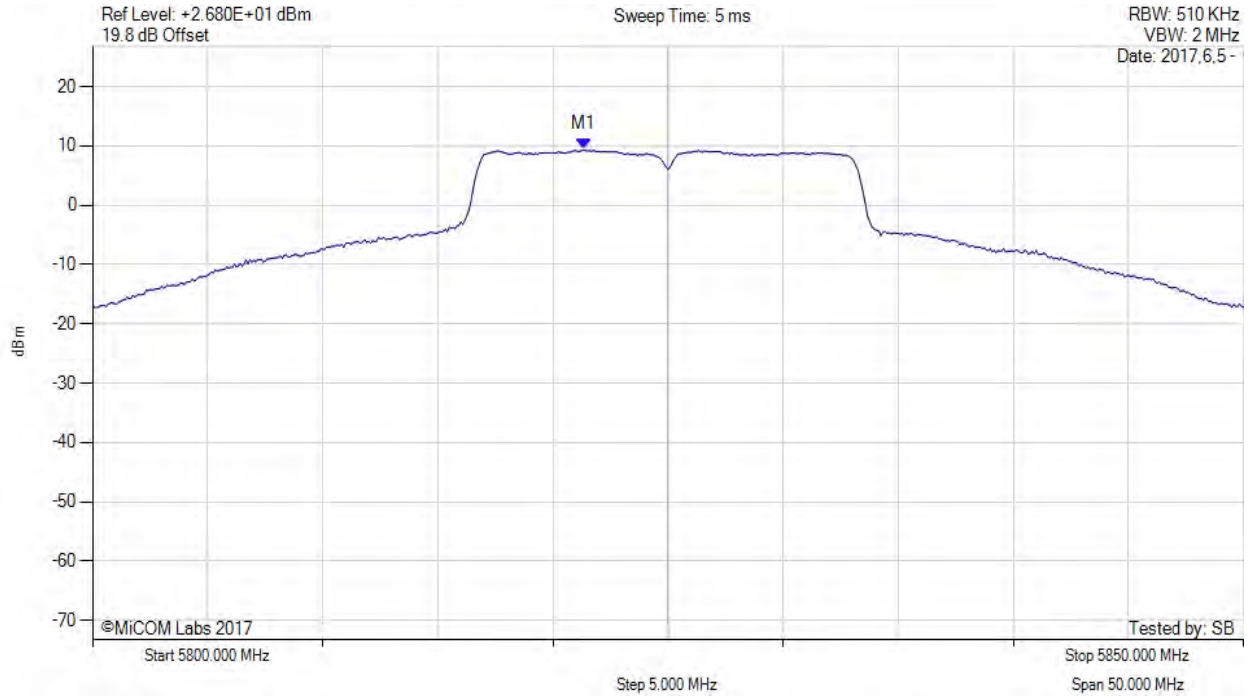

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5821.300 MHz : 9.383 dBm M1 + DCCF : 5821.300 MHz : 9.427 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -17.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 116 of 159

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5825.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

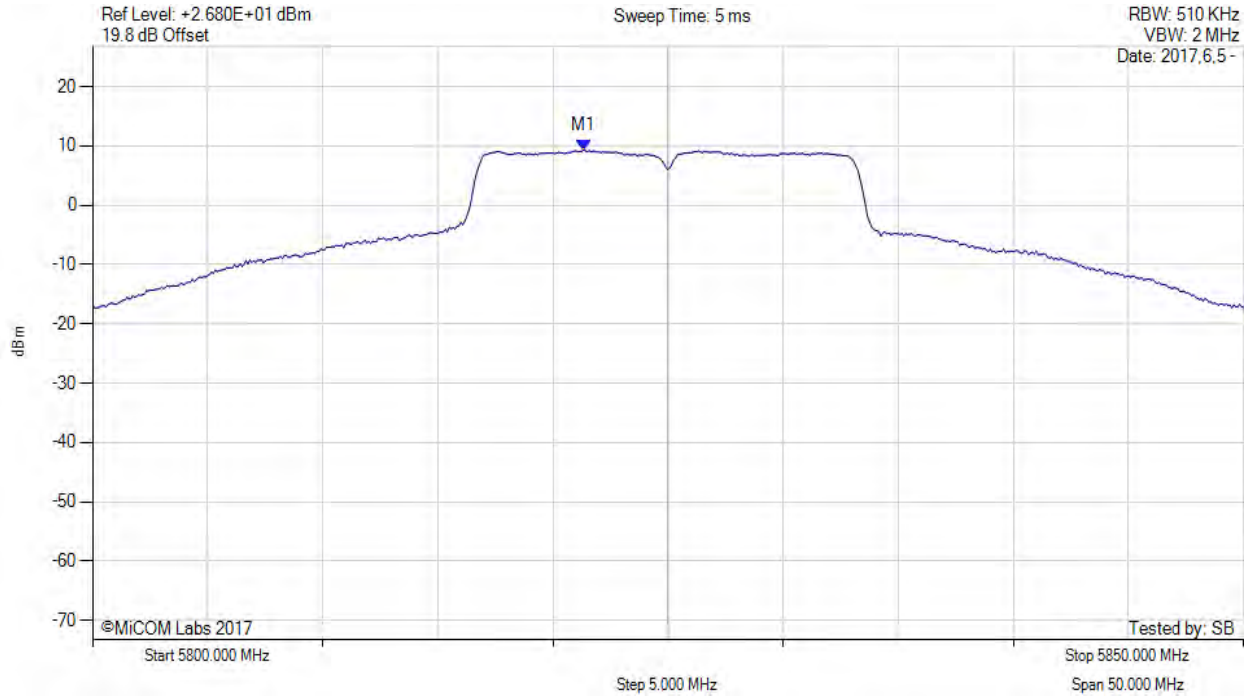

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5821.300 MHz : 9.328 dBm M1 + DCCF : 5821.300 MHz : 9.372 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -17.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 117 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

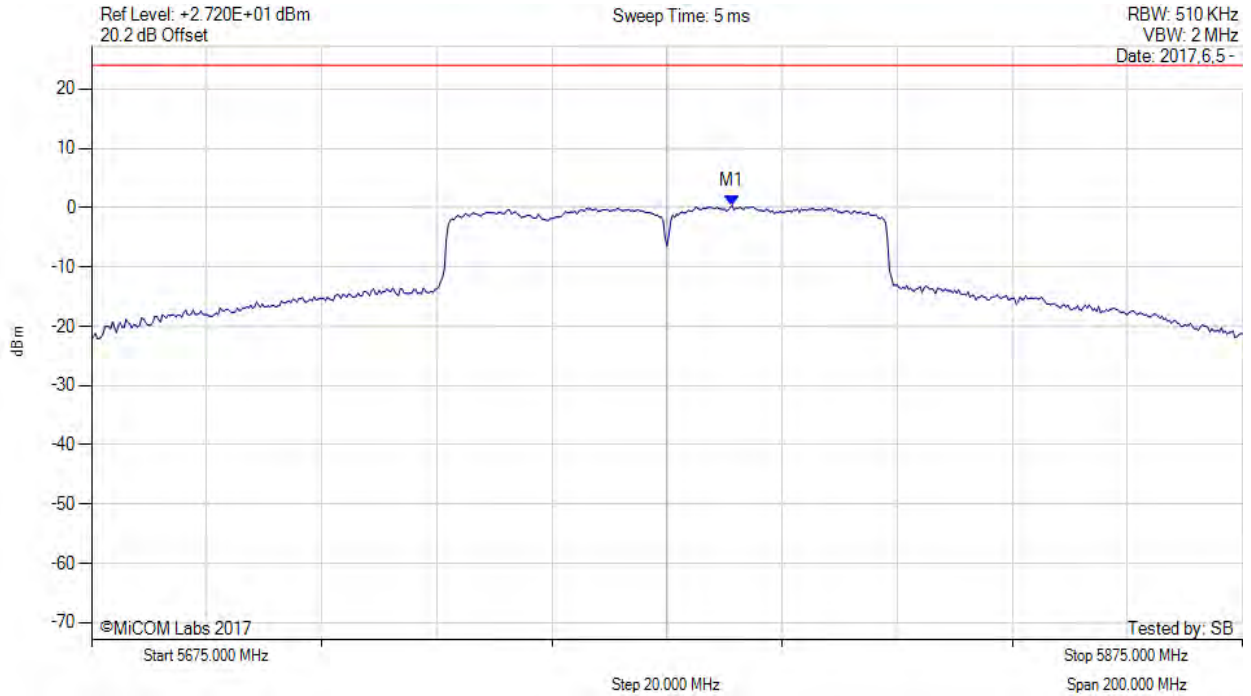

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5786.300 MHz : 0.338 dBm	Limit: ≤ 23.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 118 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

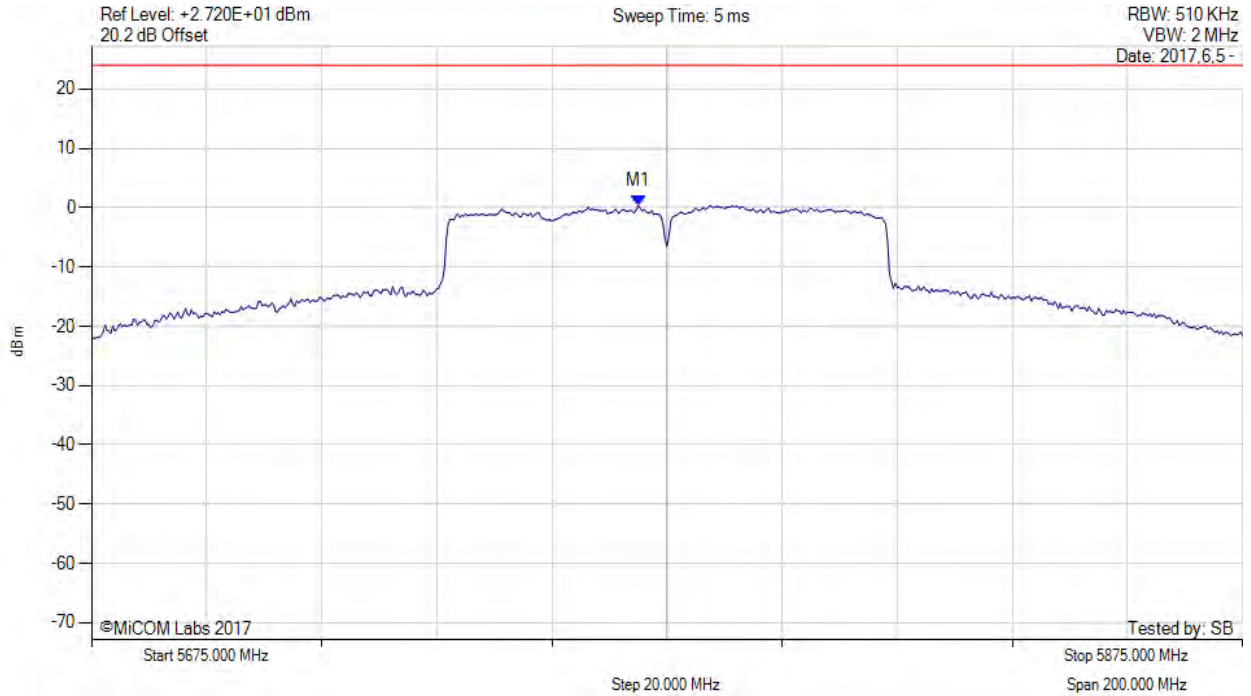

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5770.000 MHz : 0.380 dBm	Channel Frequency: 5775.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 119 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

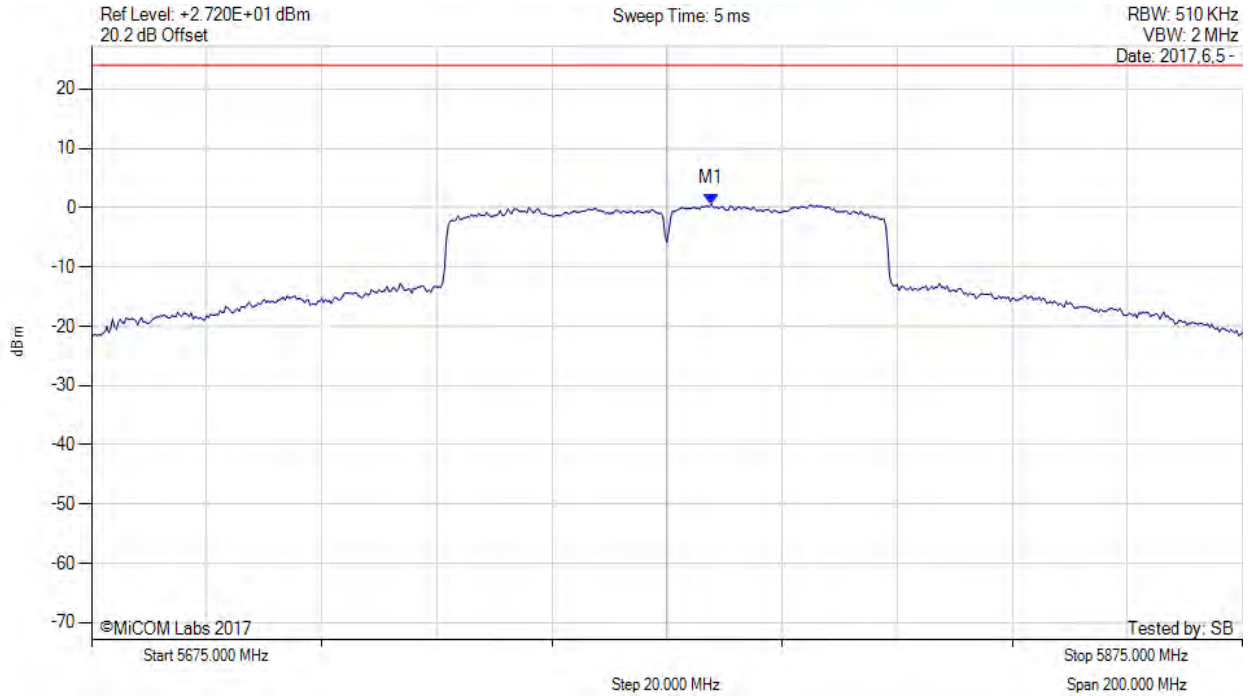

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5782.700 MHz : 0.649 dBm	Channel Frequency: 5775.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 120 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

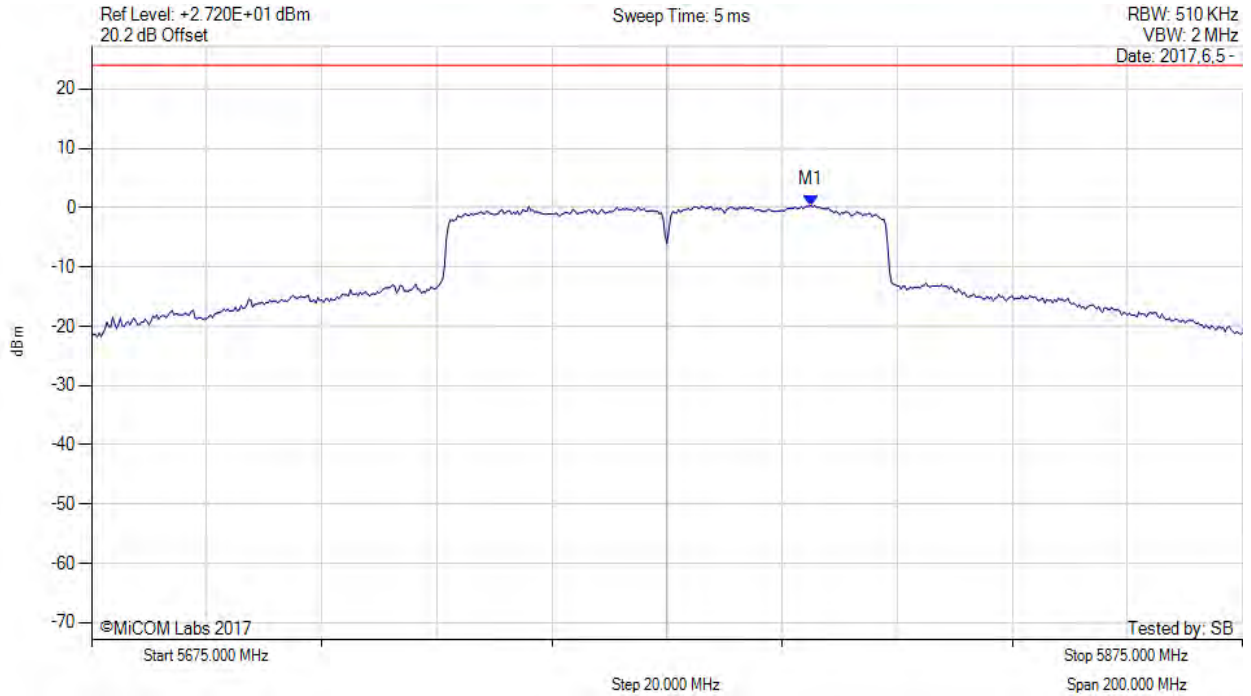

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5800.000 MHz : 0.405 dBm	Channel Frequency: 5775.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 121 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

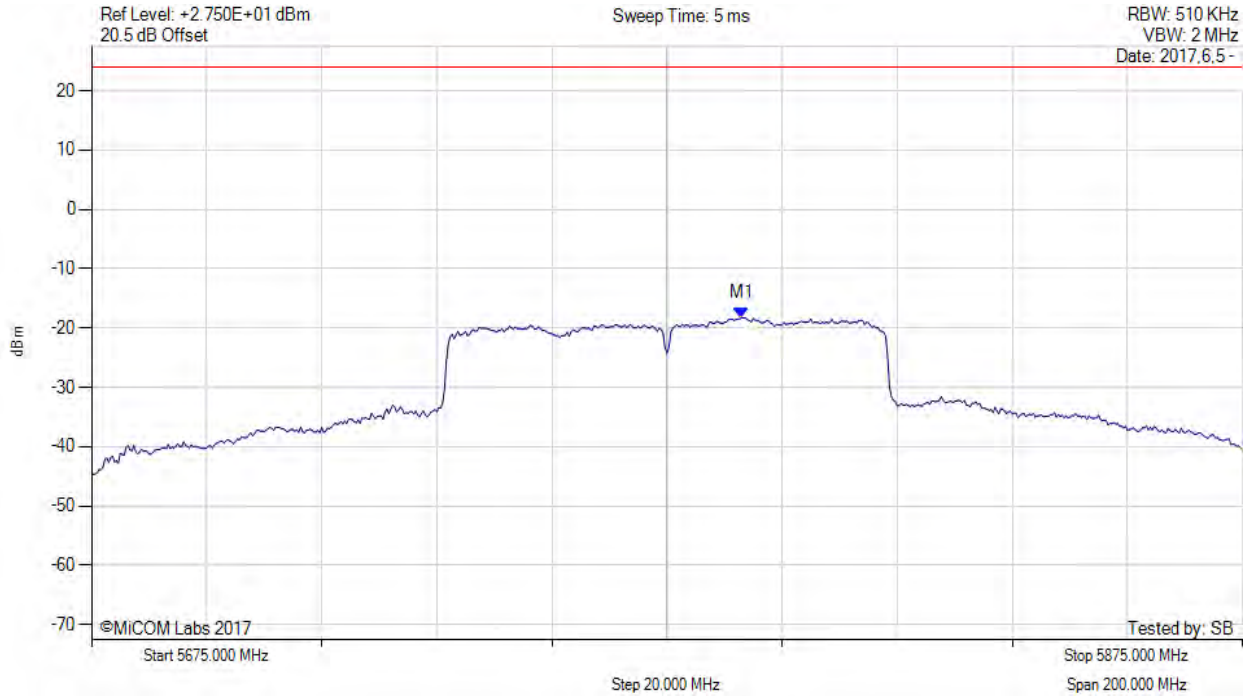

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5788.000 MHz : -18.238 dBm	Limit: ≤ 23.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 122 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

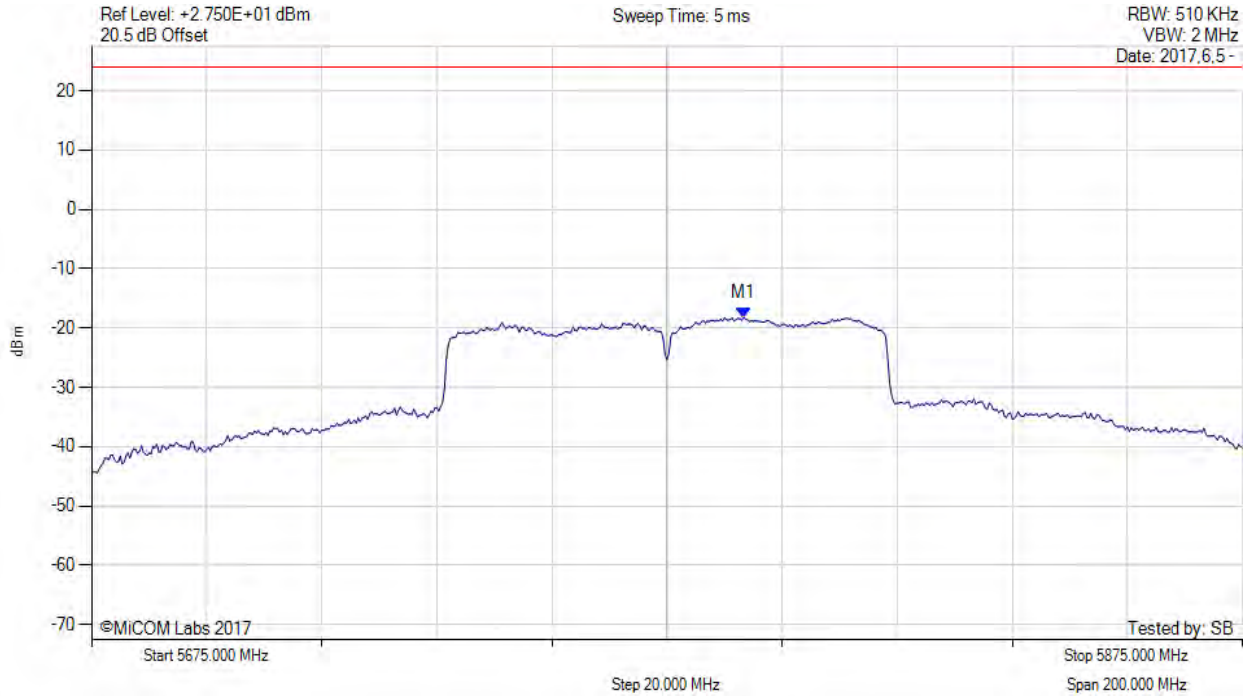

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5788.300 MHz : -18.259 dBm	Channel Frequency: 5775.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 123 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

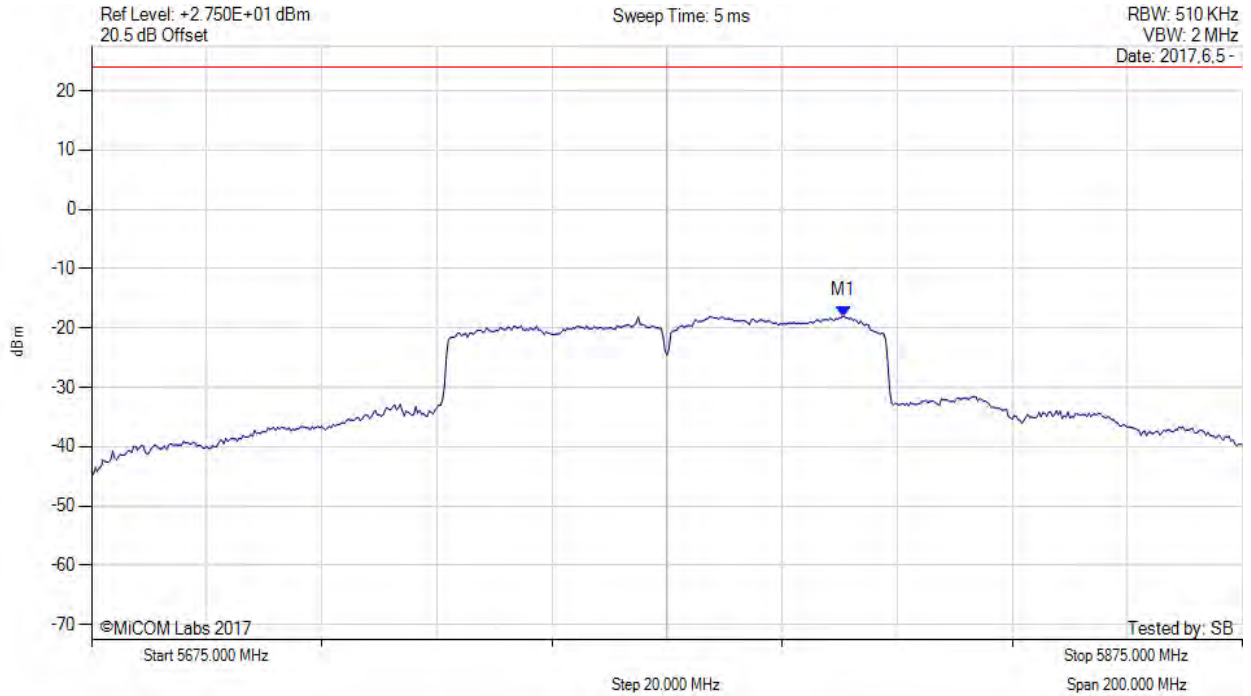

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5805.700 MHz : -17.990 dBm	Channel Frequency: 5775.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 124 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

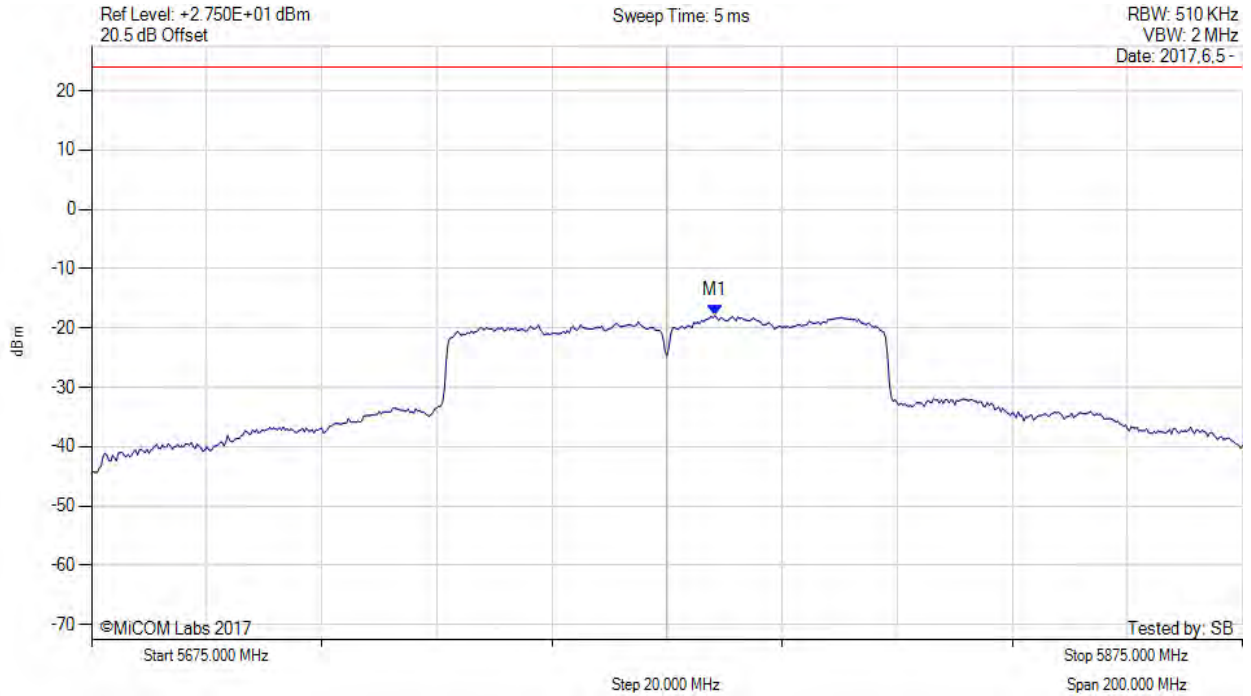

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5783.300 MHz : -17.898 dBm	Channel Frequency: 5775.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 125 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

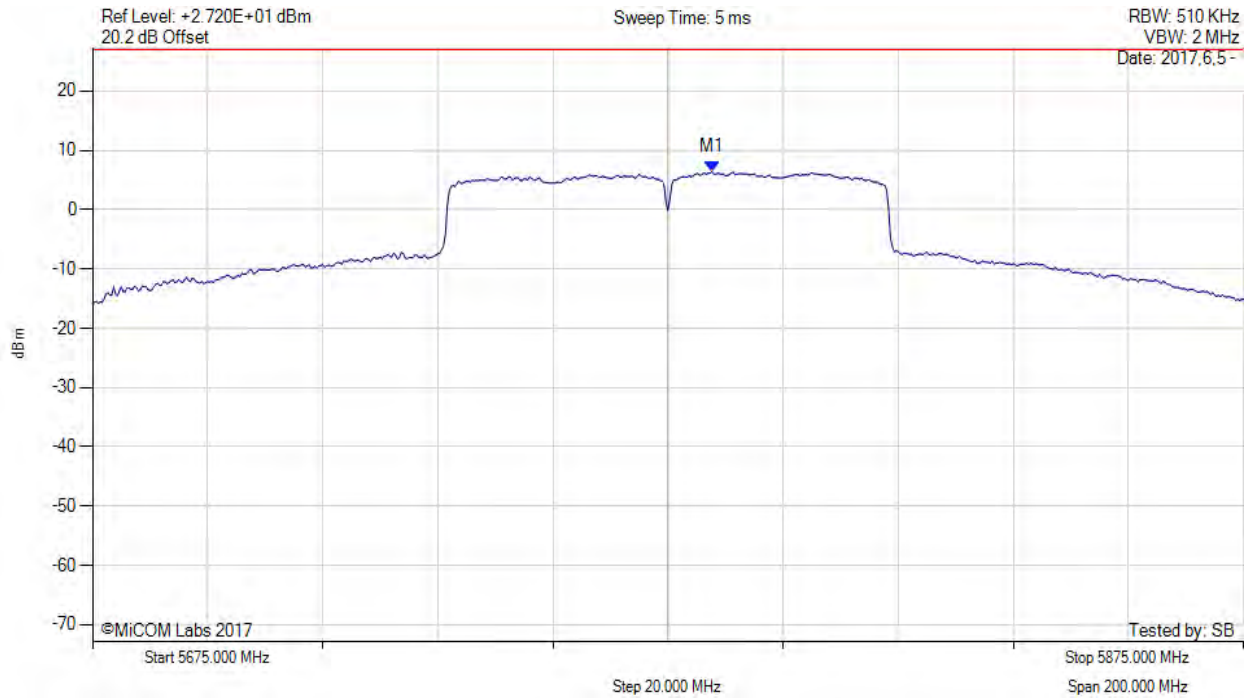

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5782.700 MHz : 6.395 dBm M1 + DCCF : 5782.700 MHz : 6.853 dBm Duty Cycle Correction Factor : +0.46 dB	Limit: $\leq 27.0$ dBm Margin: -20.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 126 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

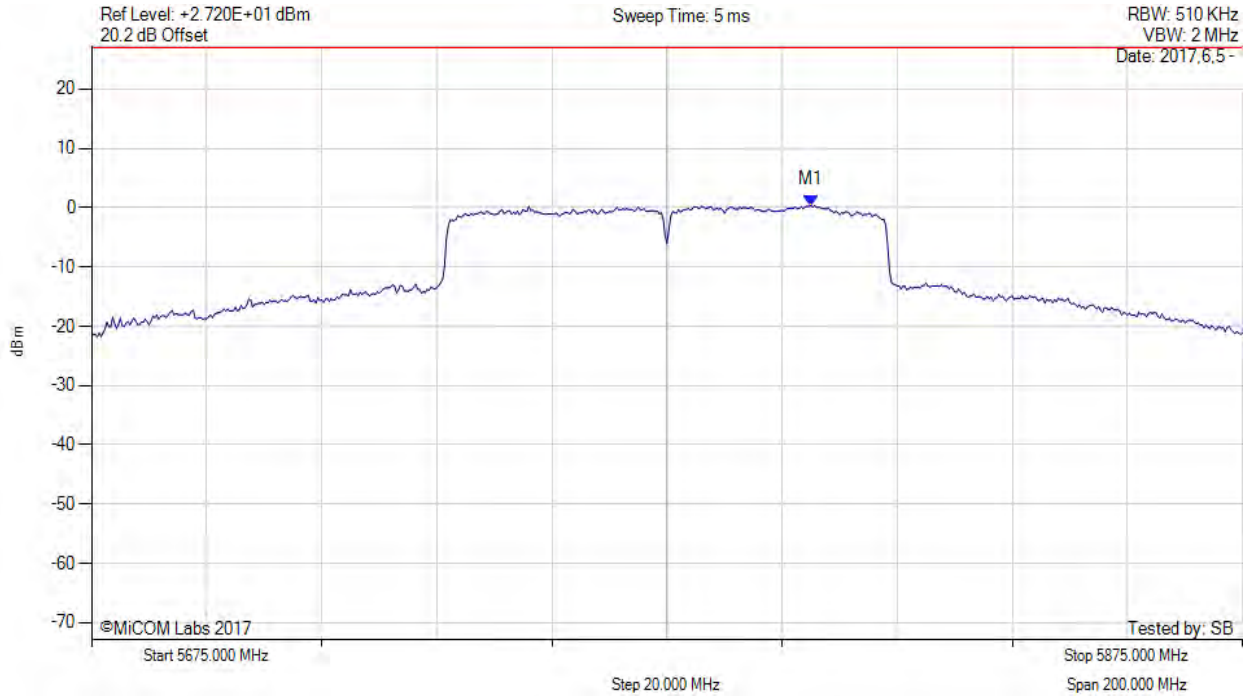

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5800.000 MHz : 0.405 dBm M1 + DCCF : 5800.000 MHz : 0.863 dBm Duty Cycle Correction Factor : +0.46 dB	Limit: $\leq 27.0$ dBm Margin: -26.1 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 127 of 159

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

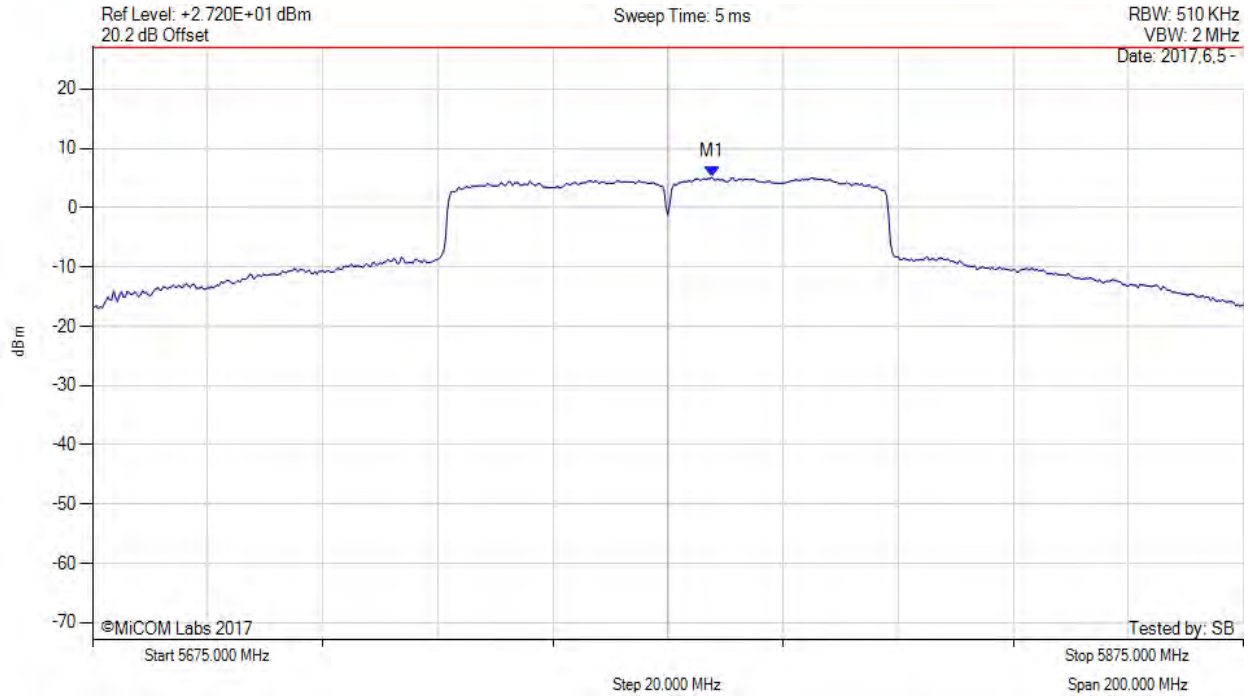

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5782.700 MHz : 5.137 dBm M1 + DCCF : 5782.700 MHz : 5.595 dBm Duty Cycle Correction Factor : +0.46 dB	Limit: $\leq 27.0$ dBm Margin: -21.4 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 128 of 159



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5775.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

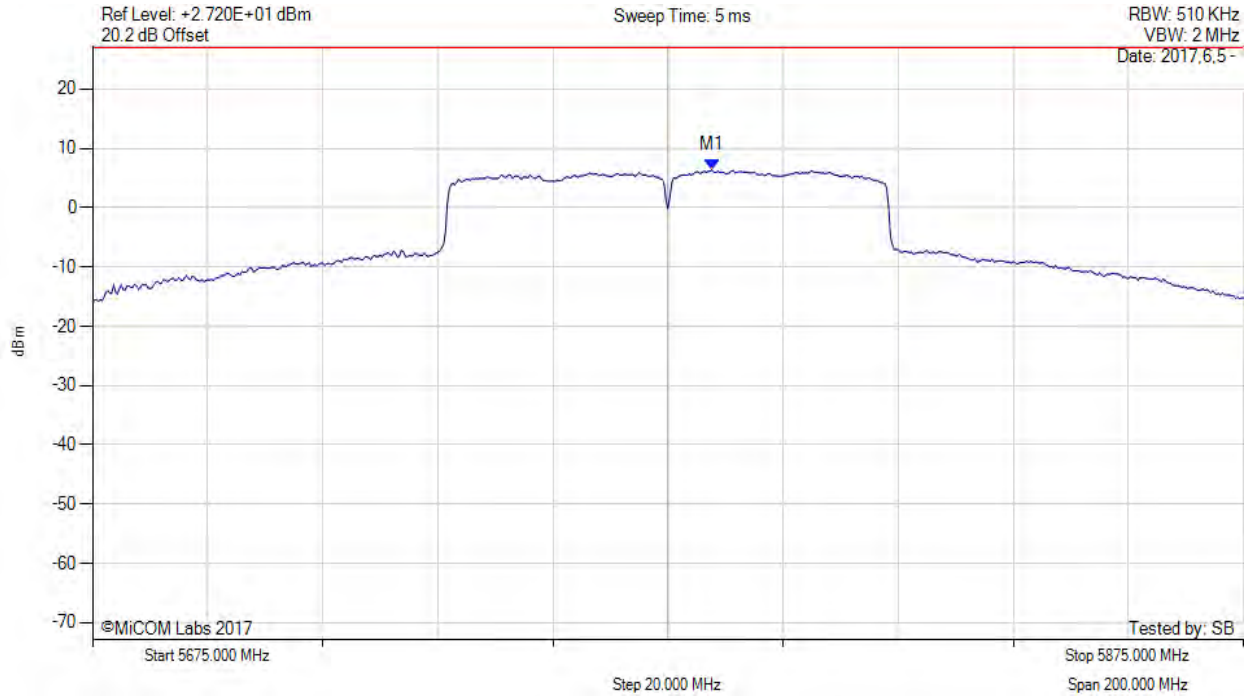

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5782.700 MHz : 6.369 dBm M1 + DCCF : 5782.700 MHz : 6.827 dBm Duty Cycle Correction Factor : +0.46 dB	Limit: $\leq 27.0$ dBm Margin: -20.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 129 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

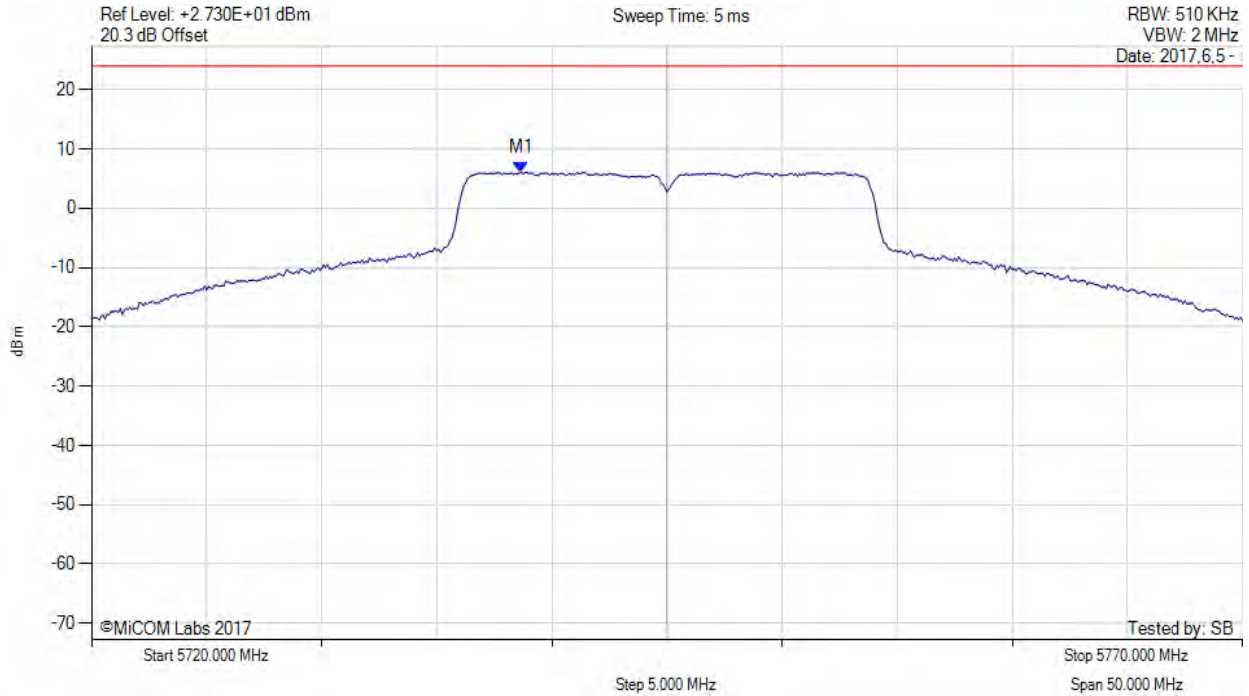

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5738.670 MHz : 6.069 dBm	Limit: $\leq 23.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 130 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

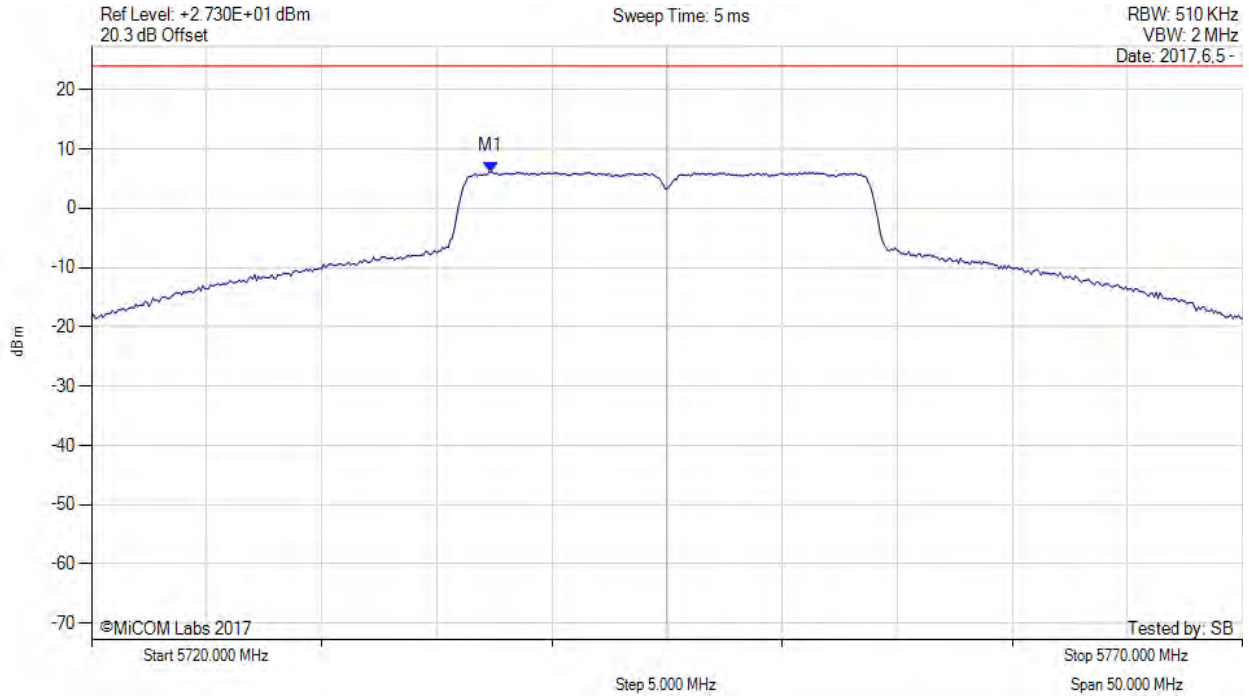

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5737.330 MHz : 6.114 dBm	Channel Frequency: 5745.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 131 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

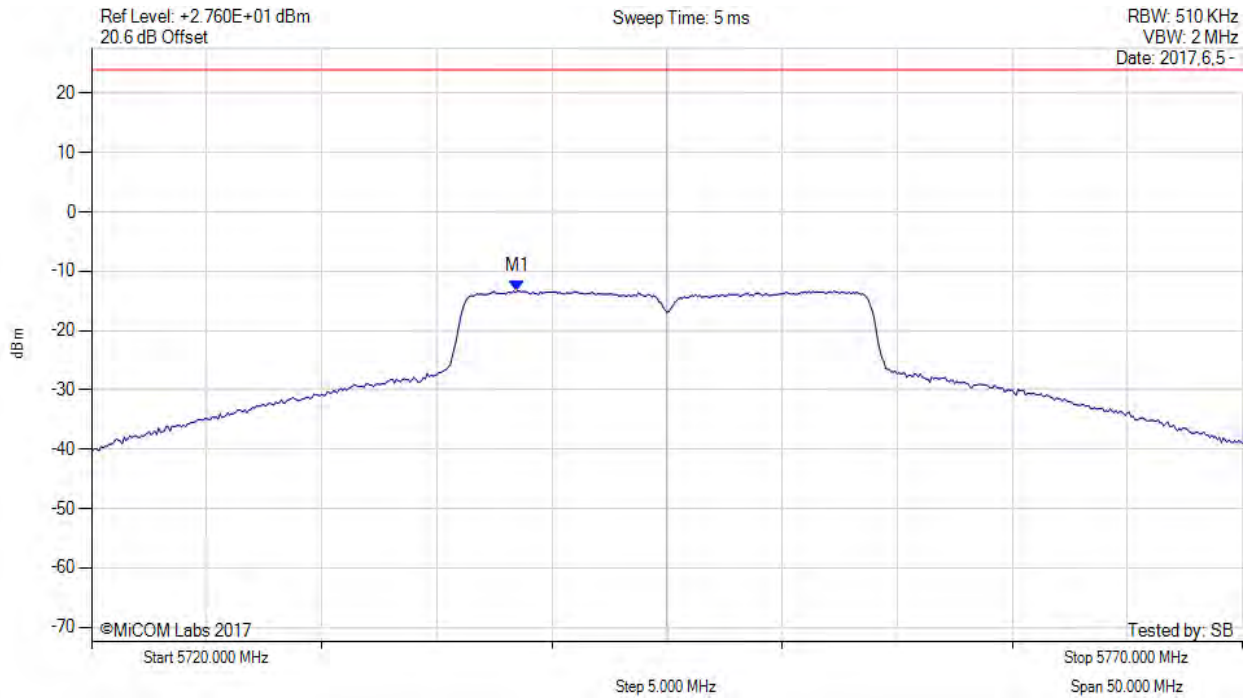

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5738.500 MHz : -13.314 dBm	Limit: ≤ 23.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 132 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

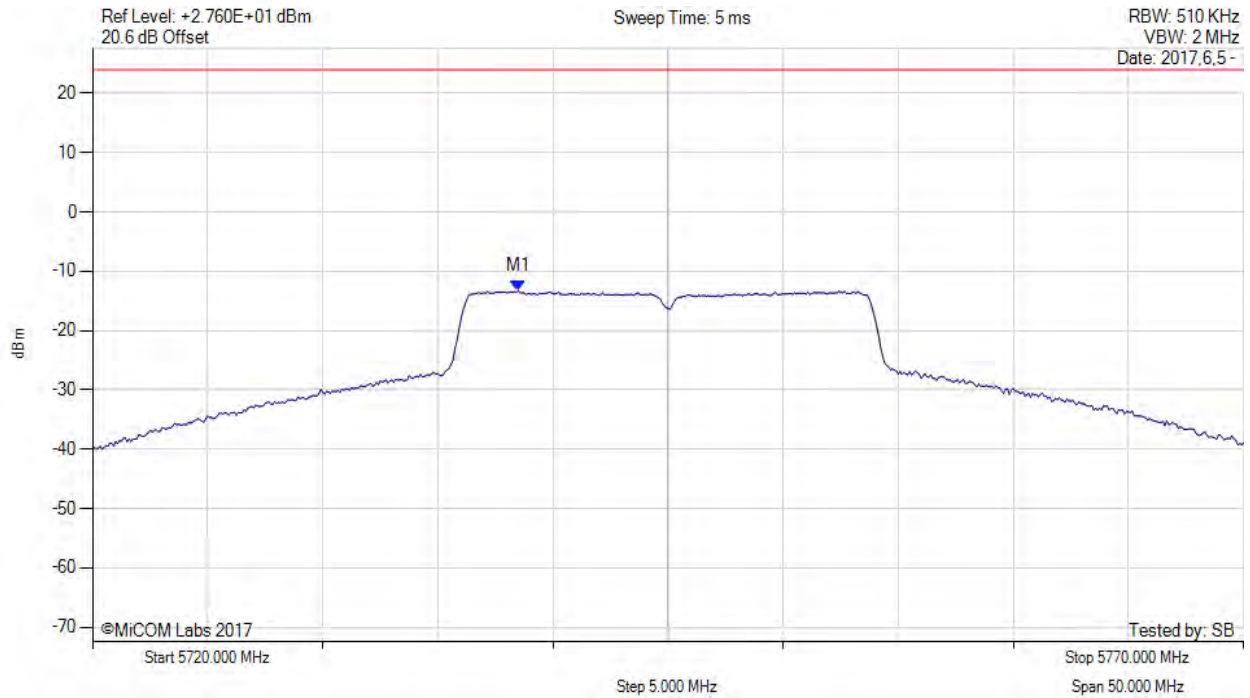

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5738.500 MHz : -13.297 dBm	Channel Frequency: 5745.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 133 of 159



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5745.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

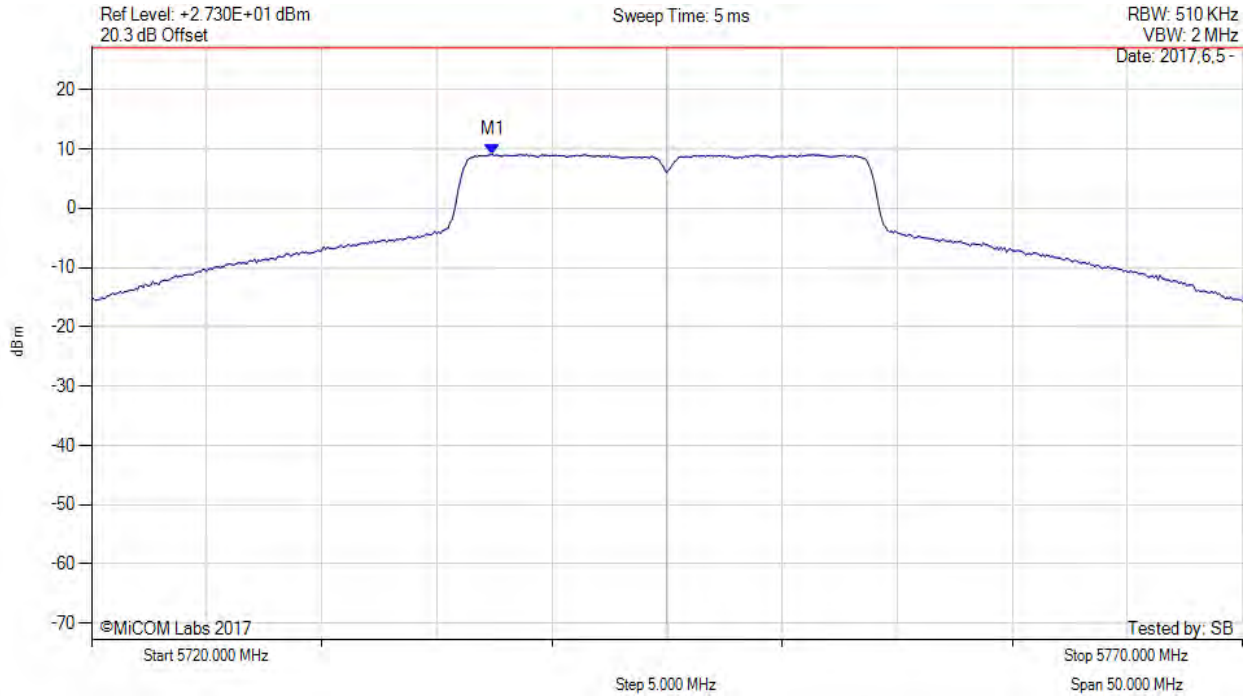

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5737.400 MHz : 9.058 dBm M1 + DCCF : 5737.400 MHz : 9.102 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: $-17.9$ dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 134 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5745.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

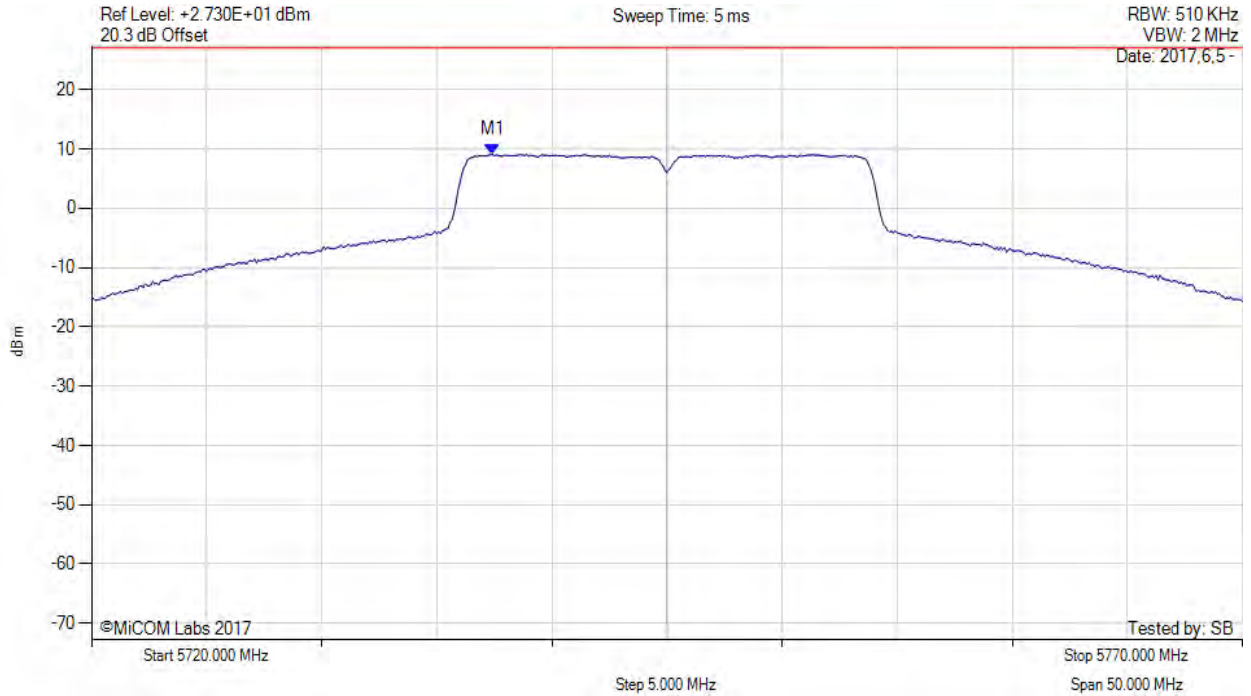

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5737.400 MHz : 9.058 dBm M1 + DCCF : 5737.400 MHz : 9.102 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -17.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 135 of 159



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

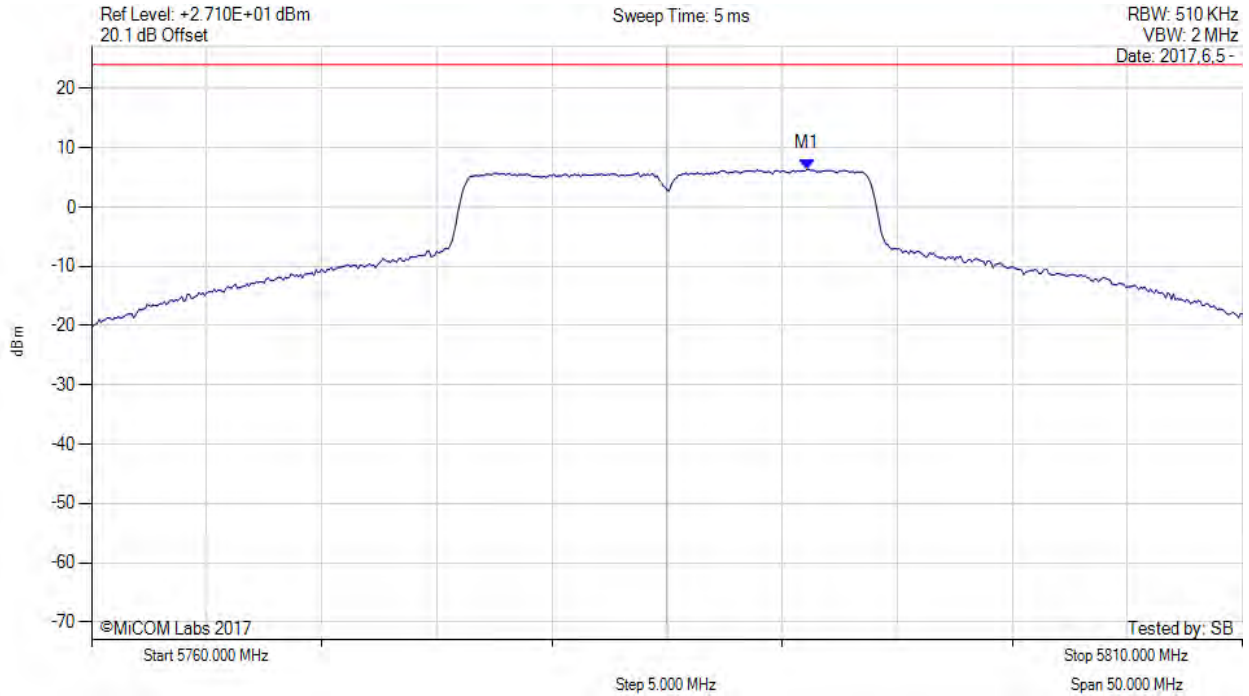

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5791.080 MHz : 6.389 dBm	Limit: $\leq 23.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 136 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

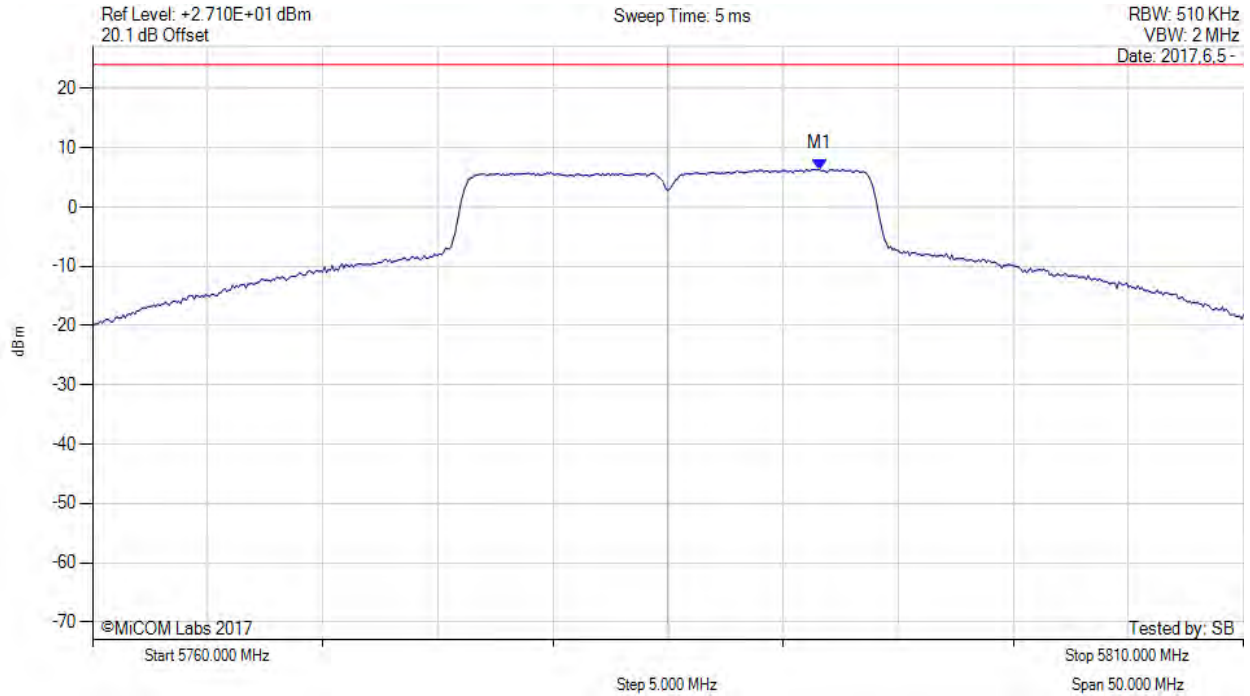

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5791.580 MHz : 6.386 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 137 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

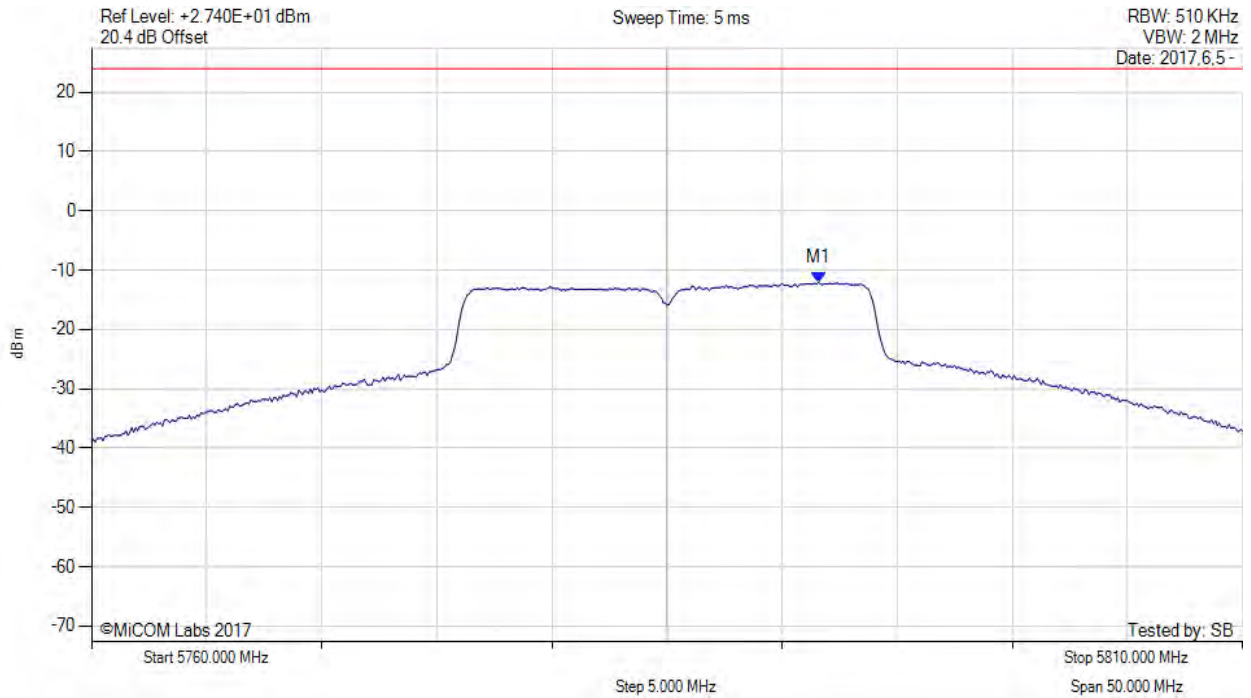

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5791.580 MHz : -12.045 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 138 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

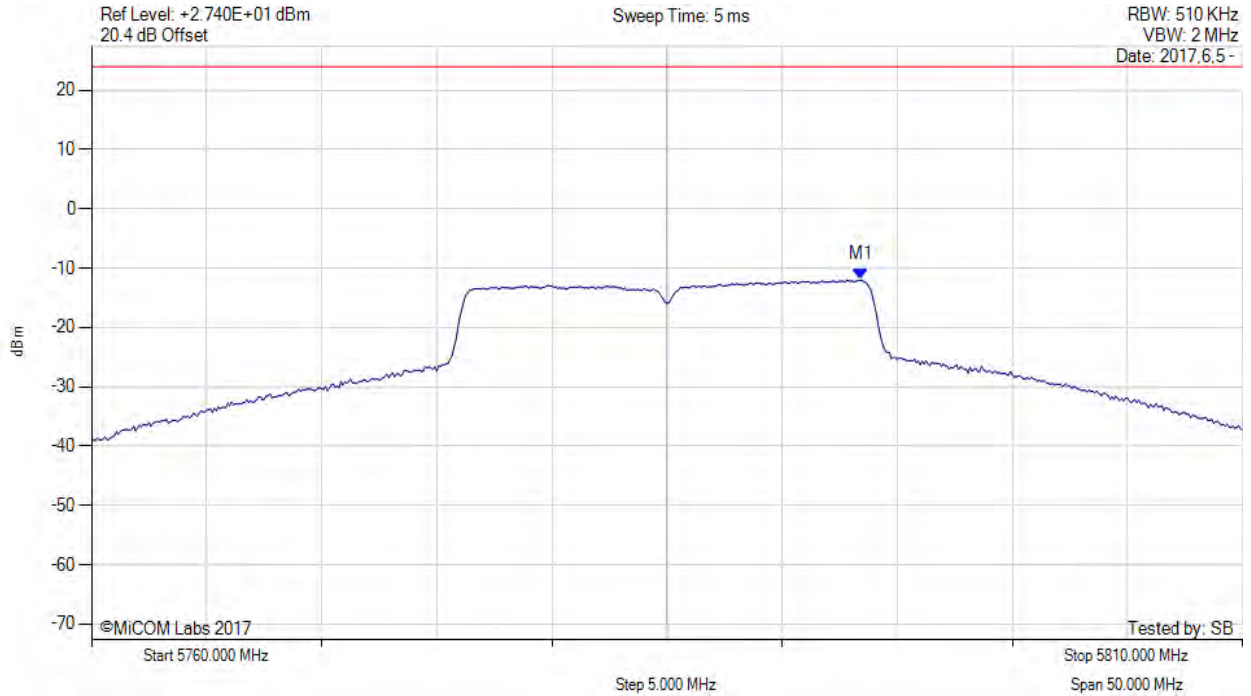

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5793.420 MHz : -11.992 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 139 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5785.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

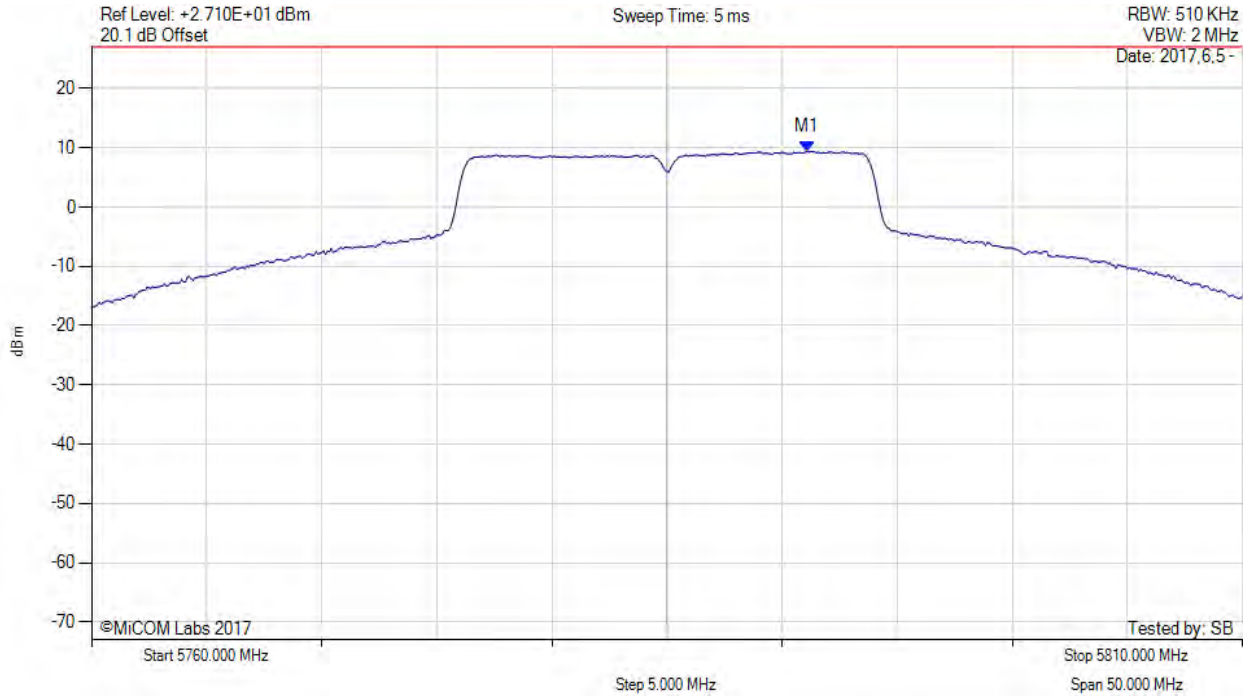

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5791.100 MHz : 9.368 dBm M1 + DCCF : 5791.100 MHz : 9.412 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -17.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 140 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5785.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

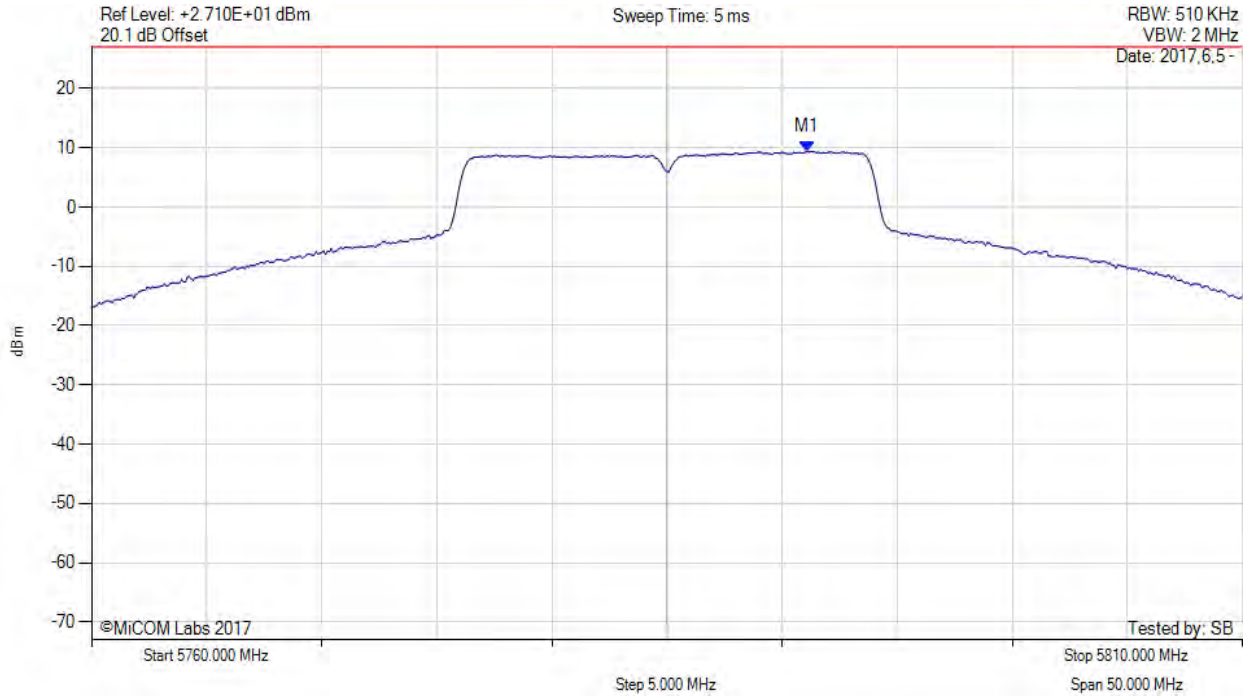

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5791.100 MHz : 9.368 dBm M1 + DCCF : 5791.100 MHz : 9.412 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -17.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 141 of 159



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

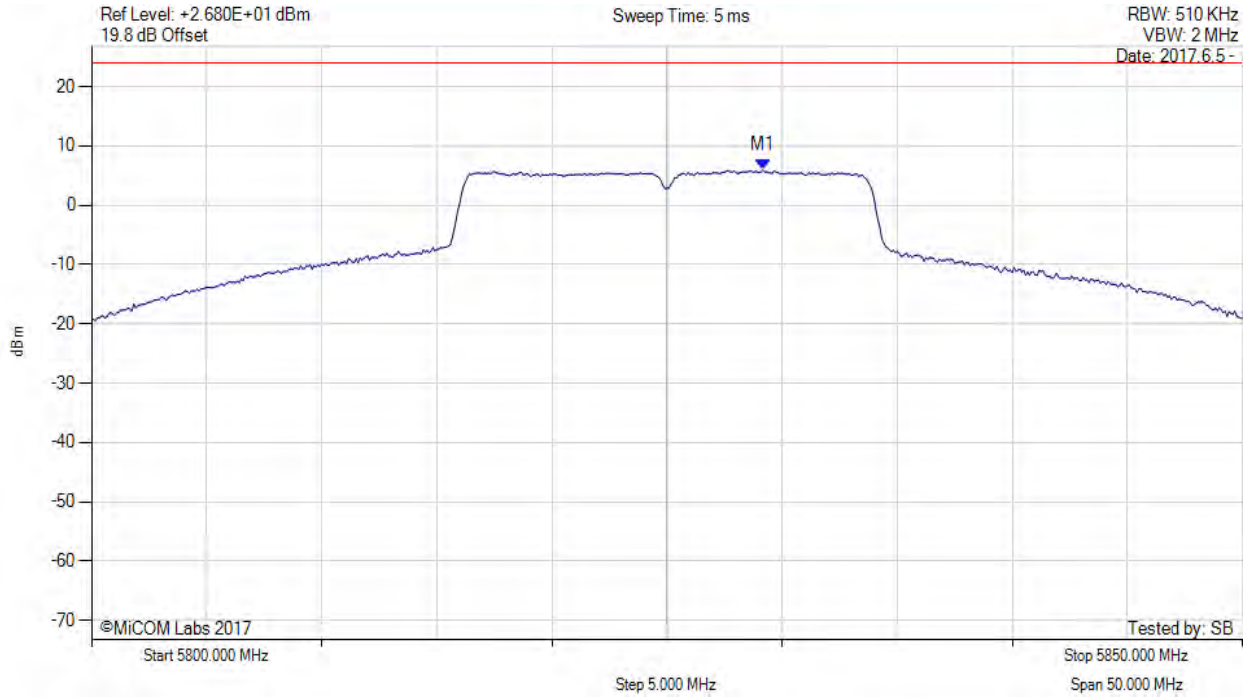

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5829.170 MHz : 5.970 dBm	Limit: $\leq 23.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 142 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

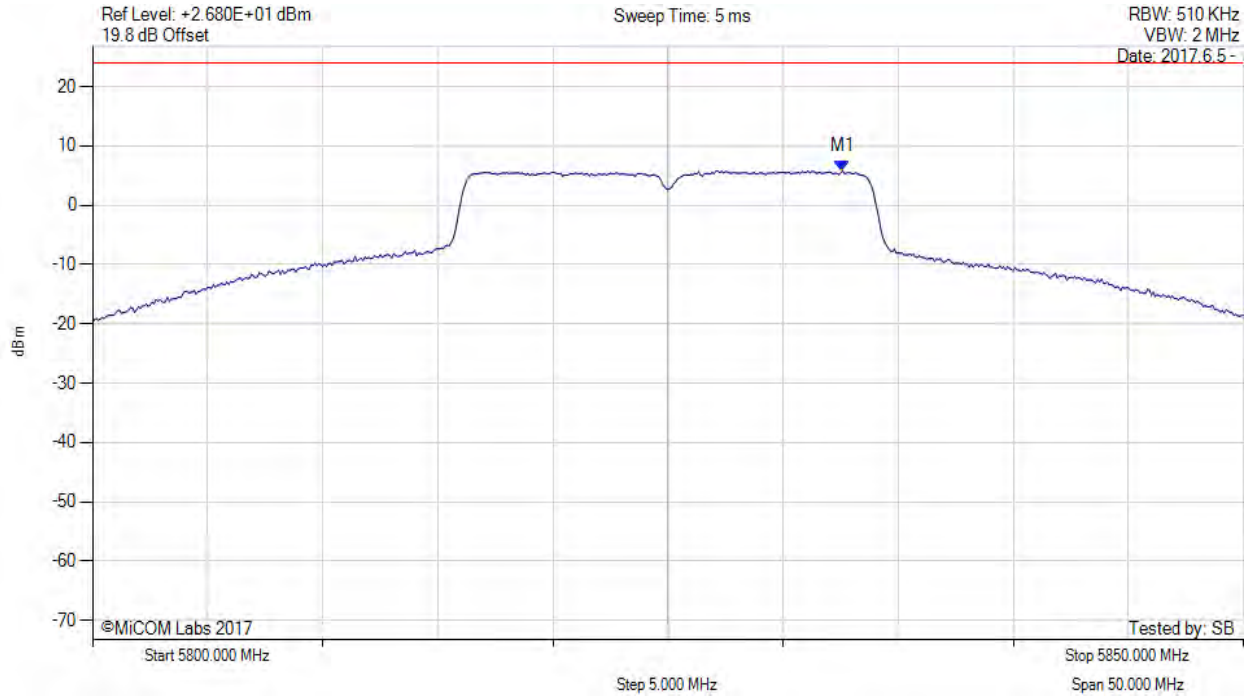

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5832.580 MHz : 5.793 dBm	Channel Frequency: 5825.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 143 of 159



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

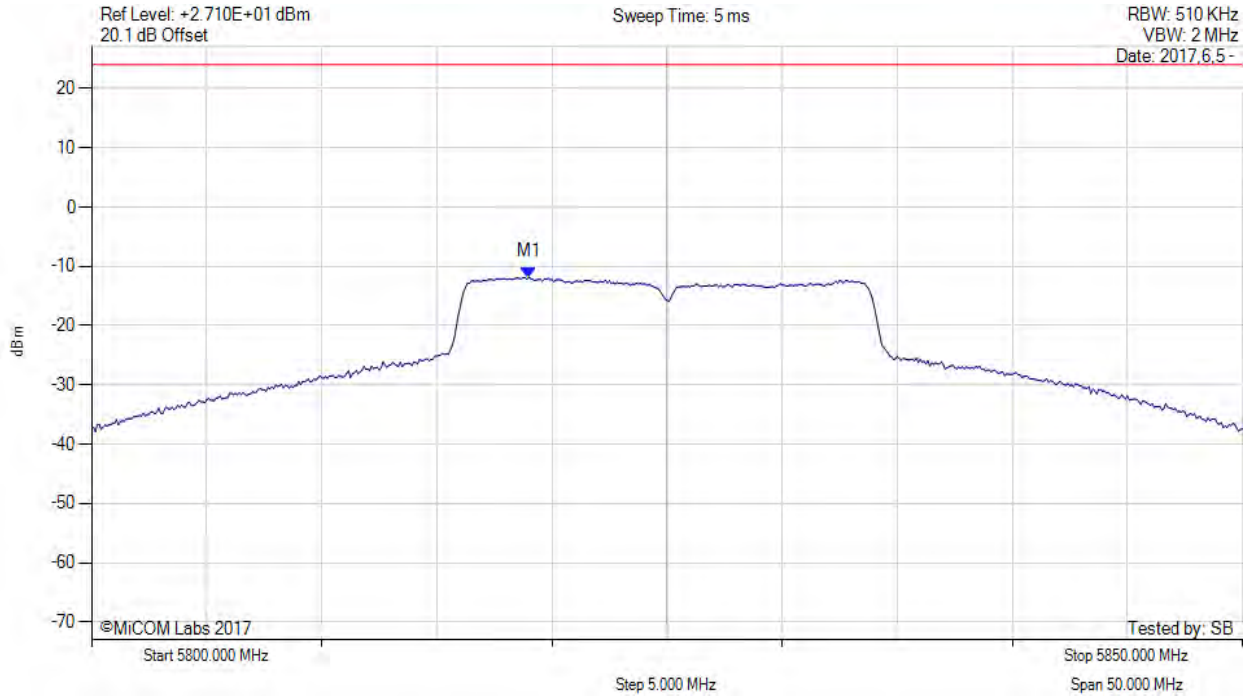

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5819.000 MHz : -11.841 dBm	Limit: ≤ 23.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 144 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

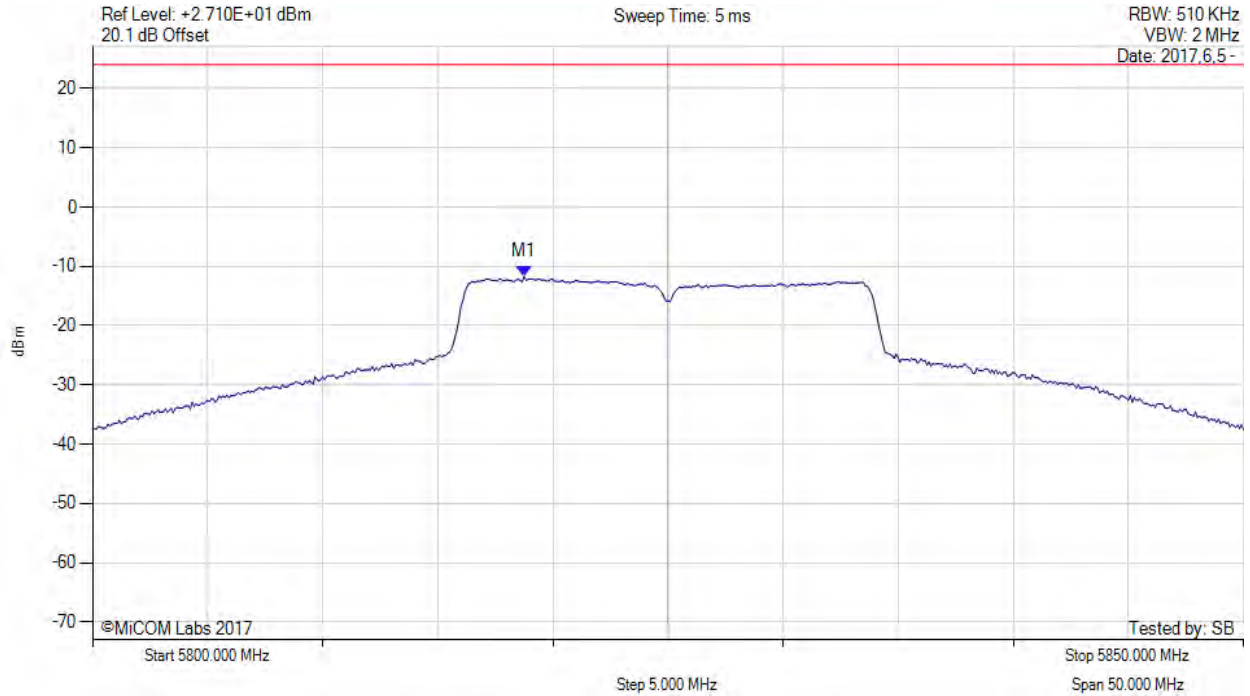

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5818.750 MHz : -11.704 dBm	Channel Frequency: 5825.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 145 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5825.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

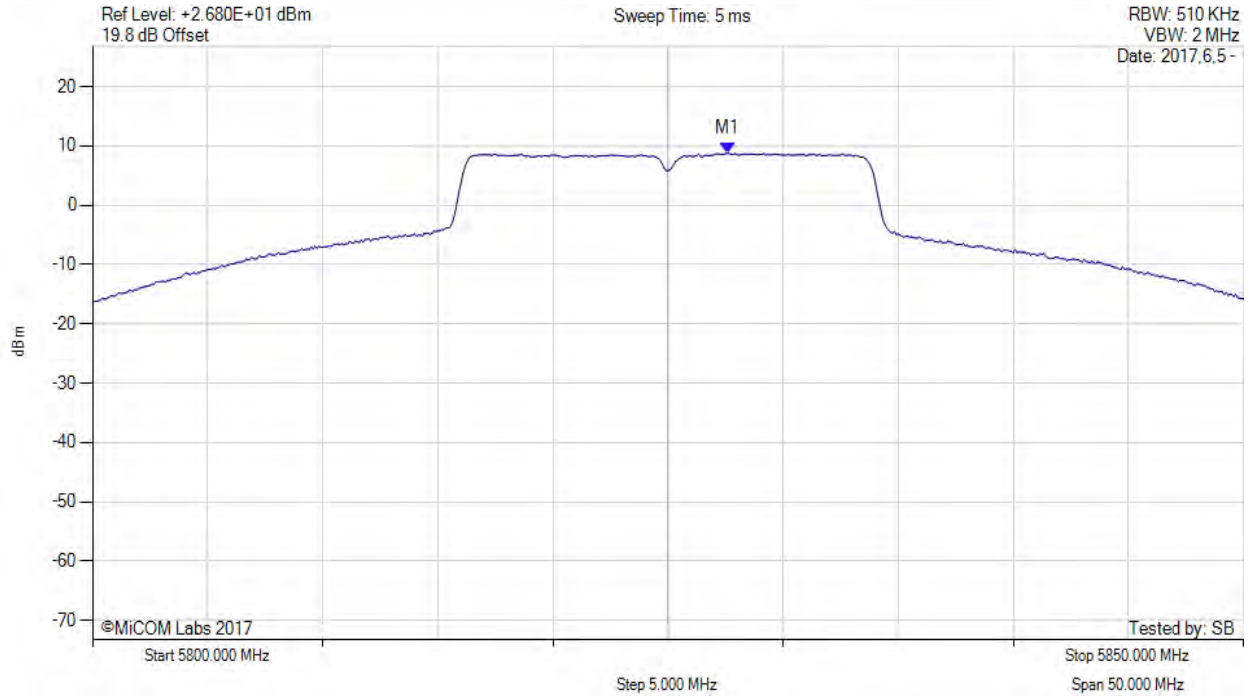

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5827.600 MHz : 8.751 dBm M1 + DCCF : 5827.600 MHz : 8.795 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -18.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 146 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5825.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

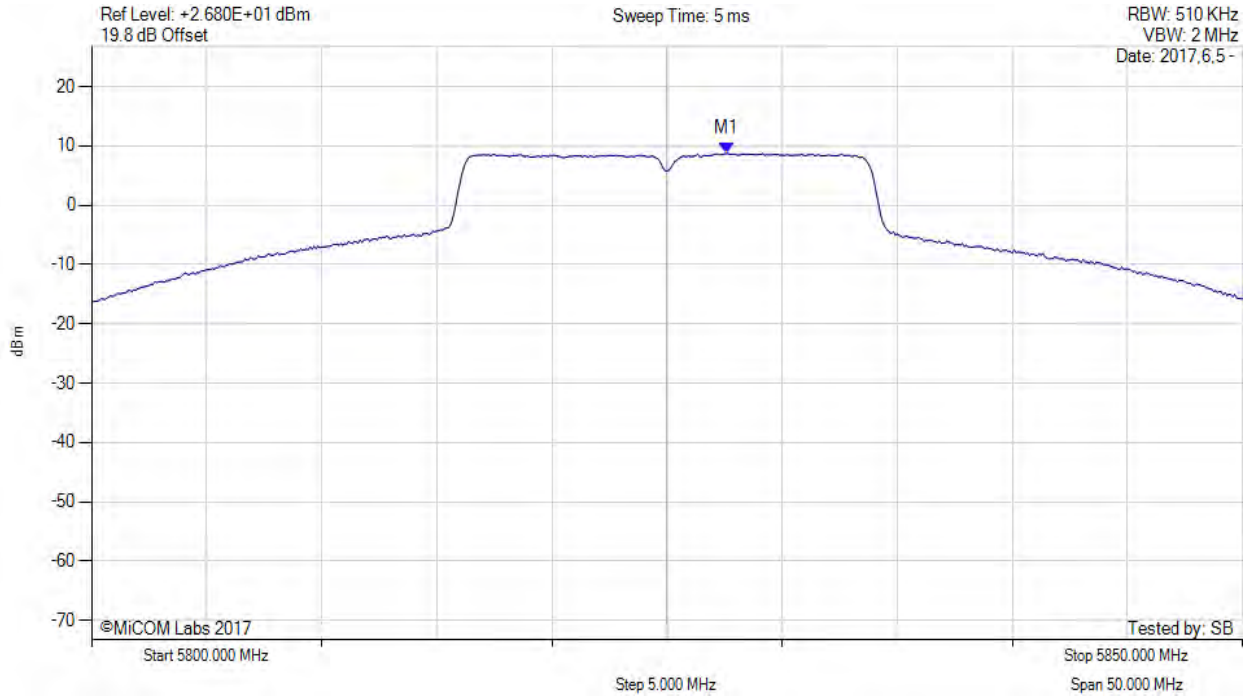

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5827.600 MHz : 8.724 dBm M1 + DCCF : 5827.600 MHz : 8.768 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -18.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 147 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

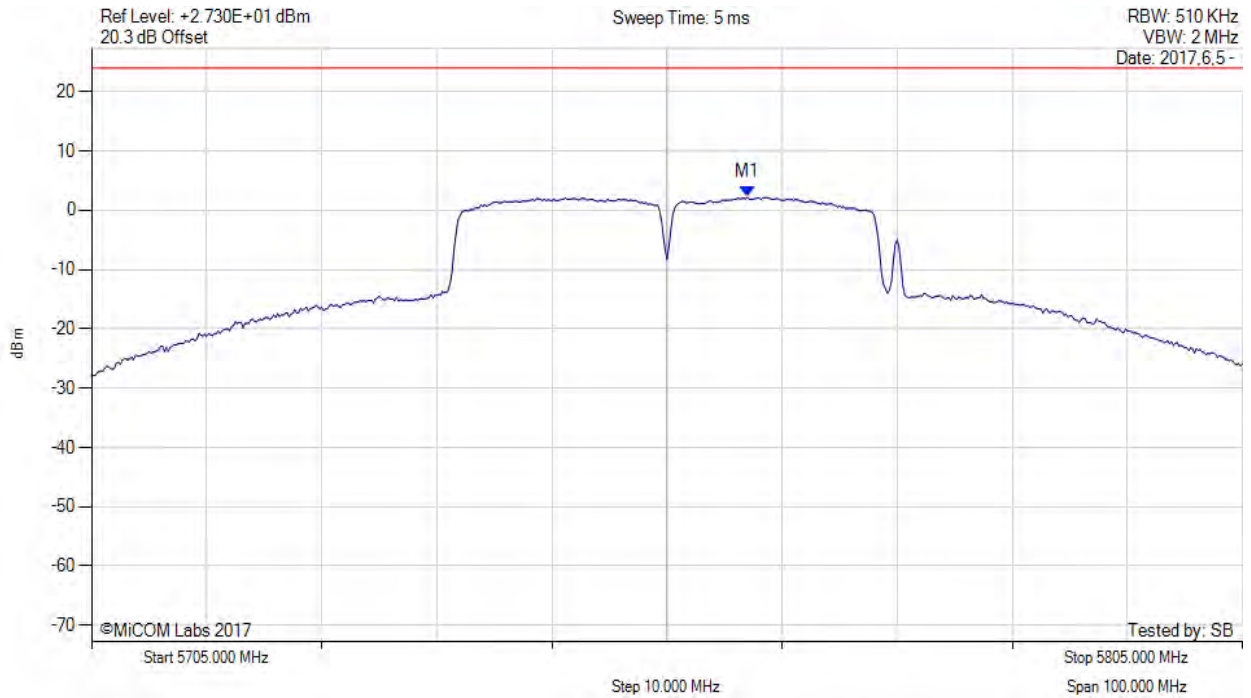

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5762.000 MHz : 2.193 dBm	Limit: ≤ 23.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 148 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

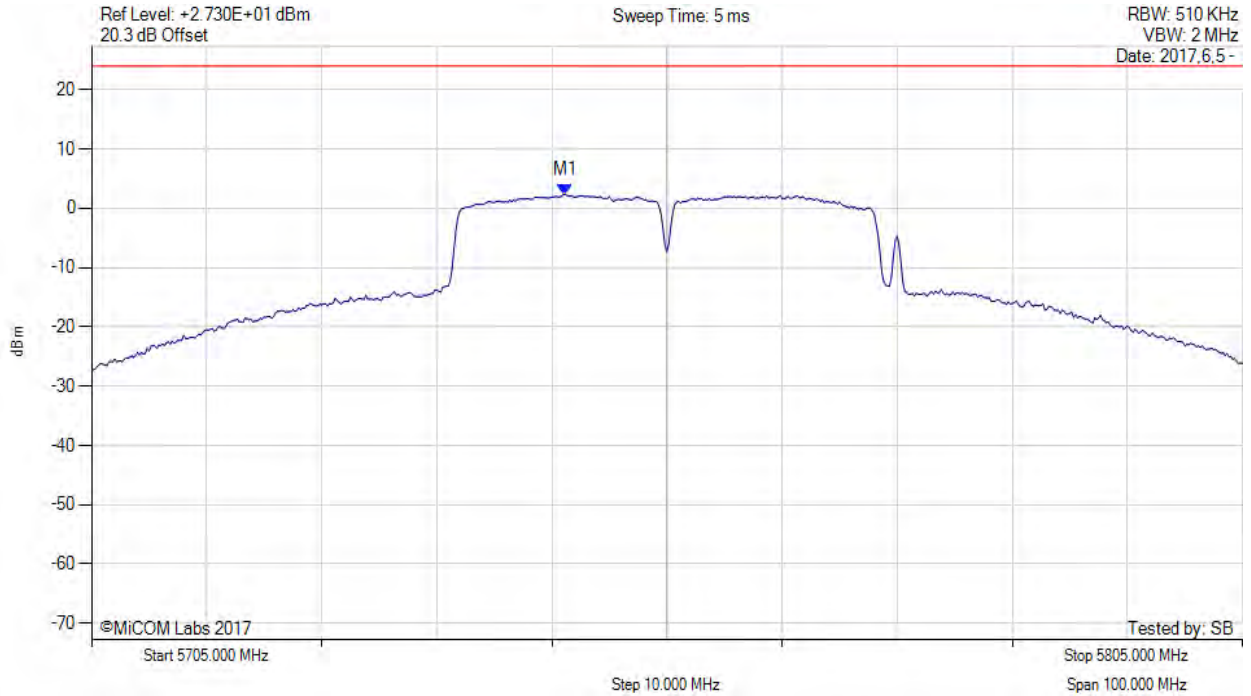

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5746.170 MHz : 2.320 dBm	Channel Frequency: 5755.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 149 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

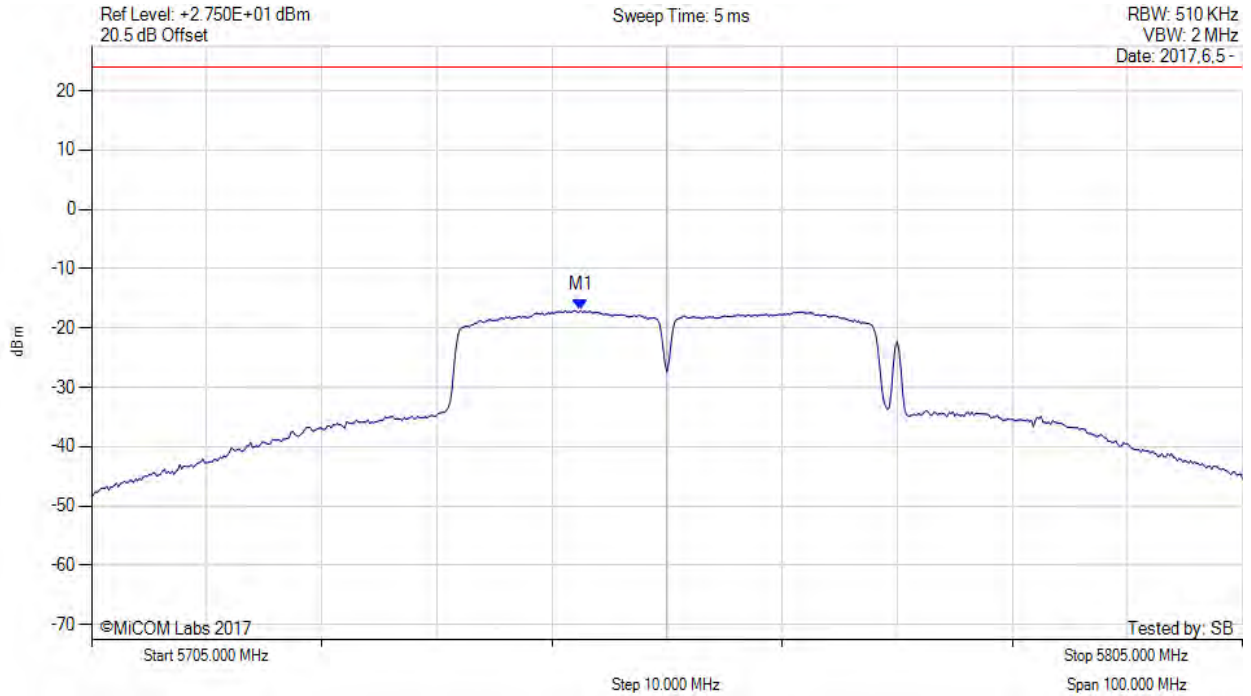

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5747.500 MHz : -17.031 dBm	Limit: $\leq 23.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 150 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

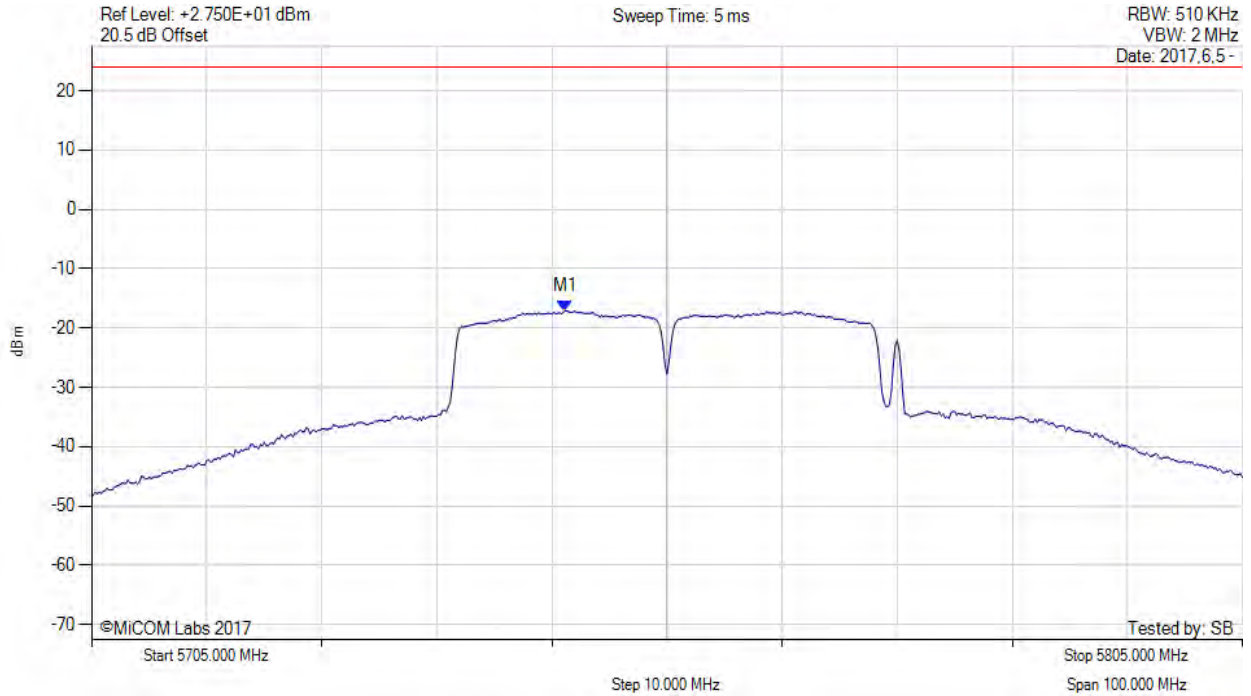

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5746.170 MHz : -17.080 dBm	Channel Frequency: 5755.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 151 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5755.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

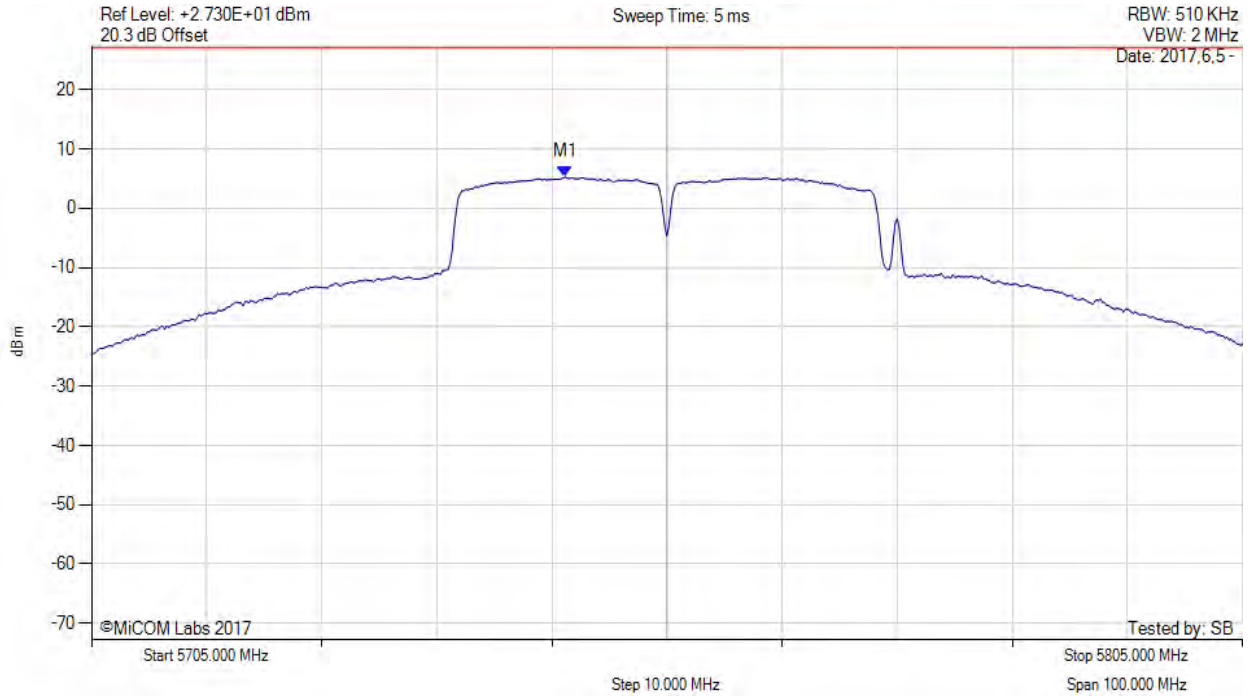

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5746.200 MHz : 5.278 dBm M1 + DCCF : 5746.200 MHz : 5.322 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -21.7 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 152 of 159



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5755.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

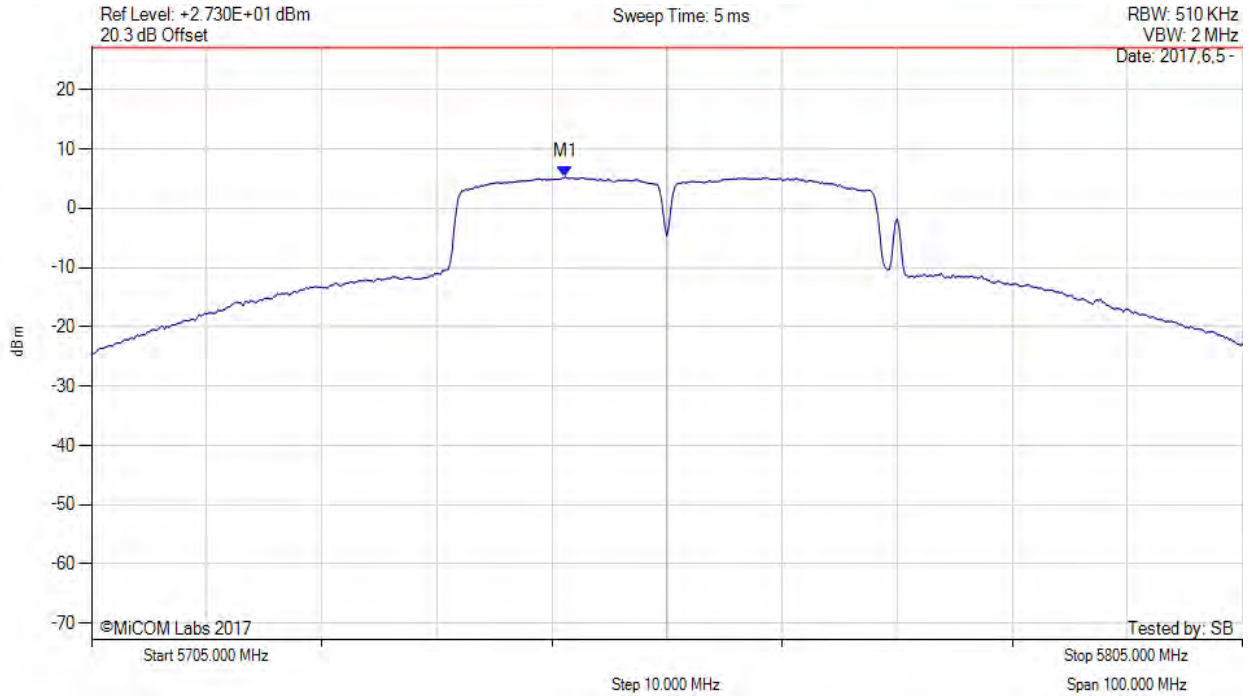

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5746.200 MHz : 5.278 dBm M1 + DCCF : 5746.200 MHz : 5.322 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -21.7 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 153 of 159



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

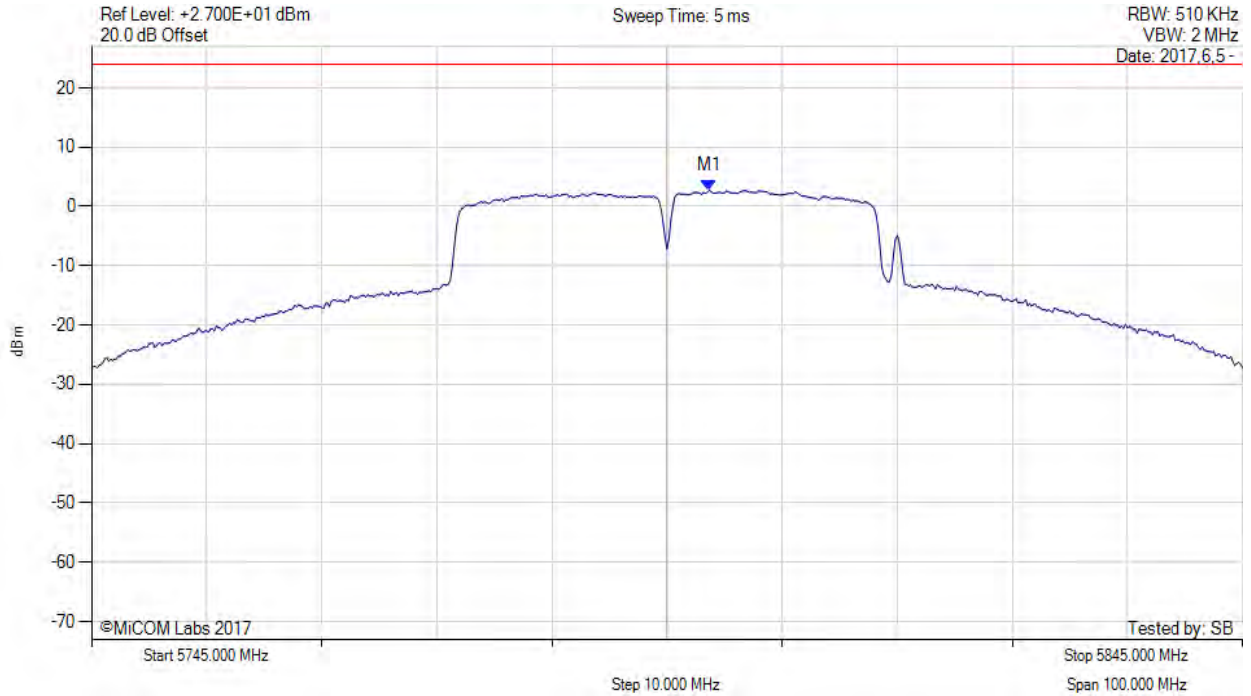

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5798.670 MHz : 2.739 dBm	Limit: $\leq 23.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 154 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

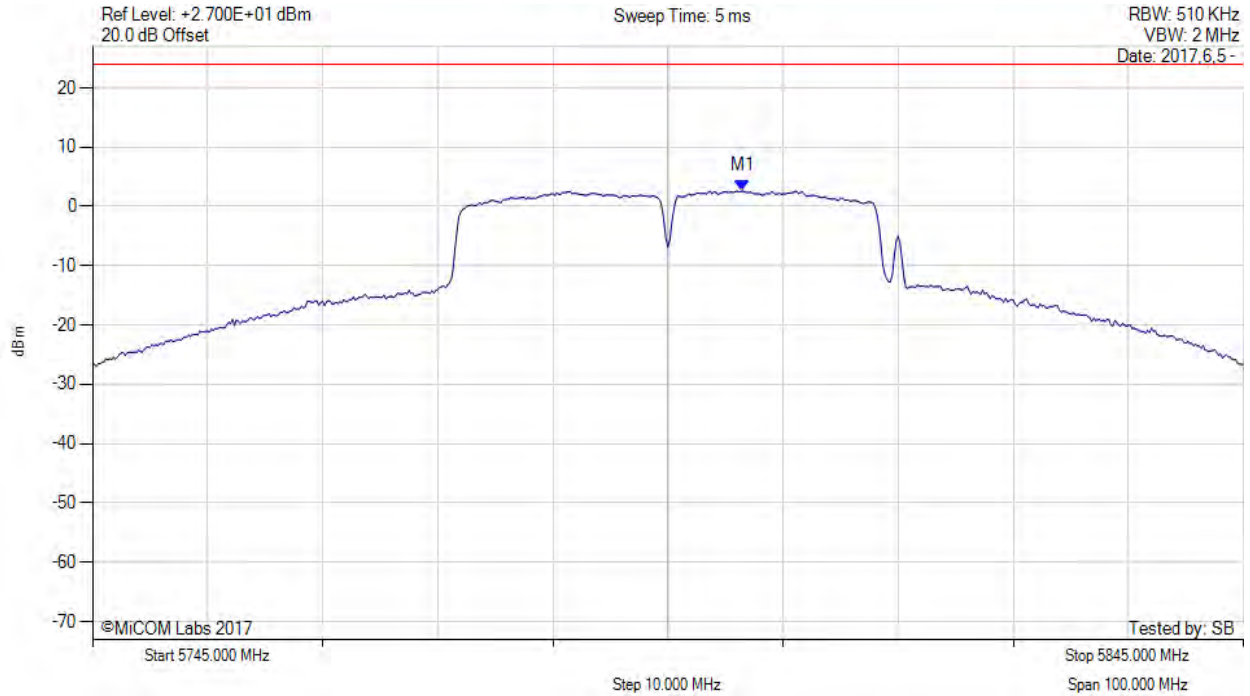

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5801.500 MHz : 2.619 dBm	Channel Frequency: 5795.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 155 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

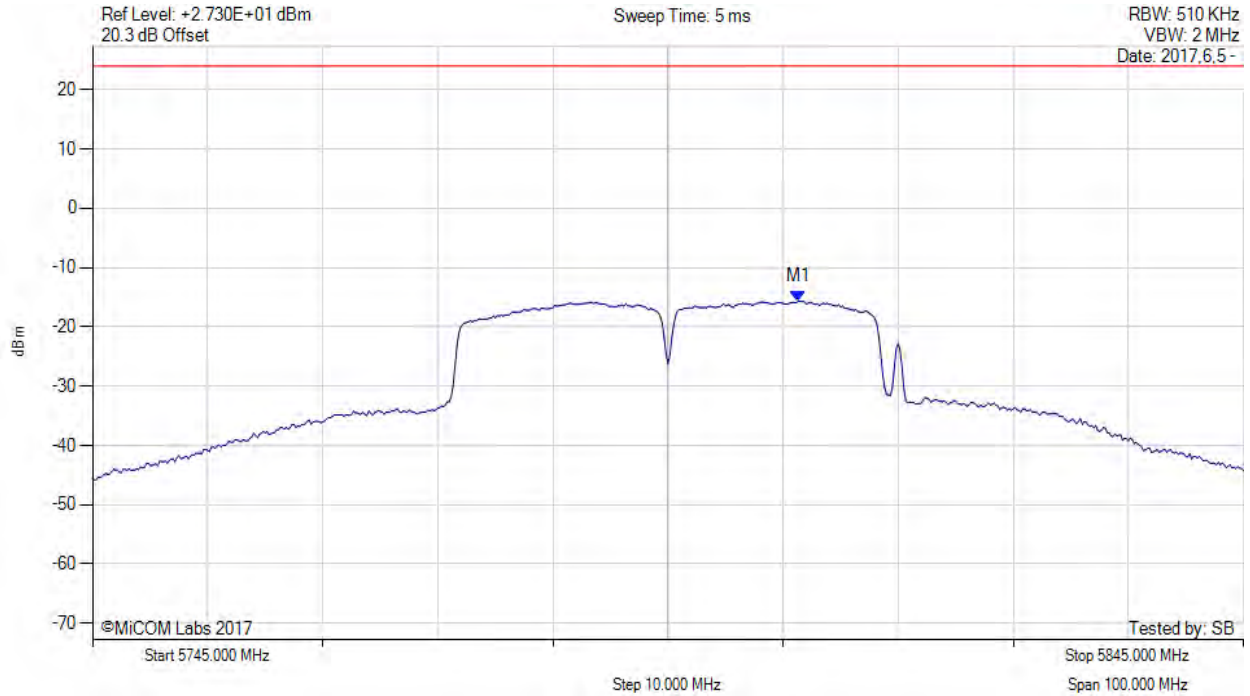

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5806.330 MHz : -15.677 dBm	Limit: $\leq 23.990$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 156 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

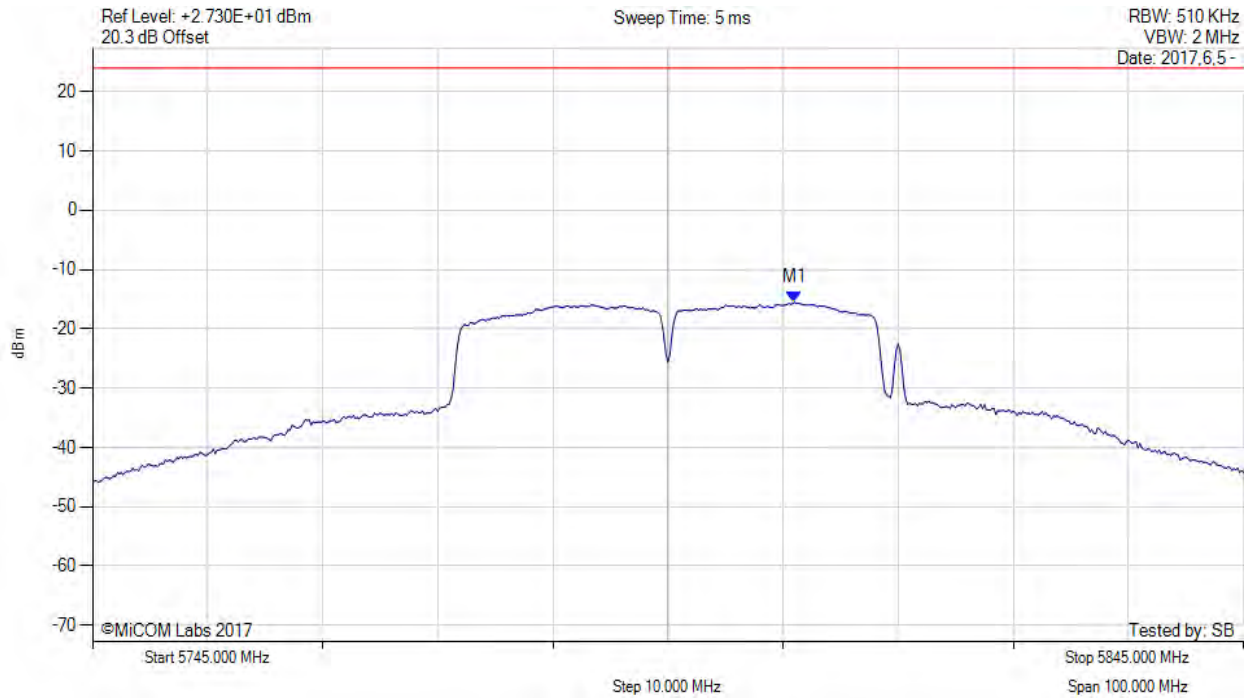

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5806.000 MHz : -15.528 dBm	Channel Frequency: 5795.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 157 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5795.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

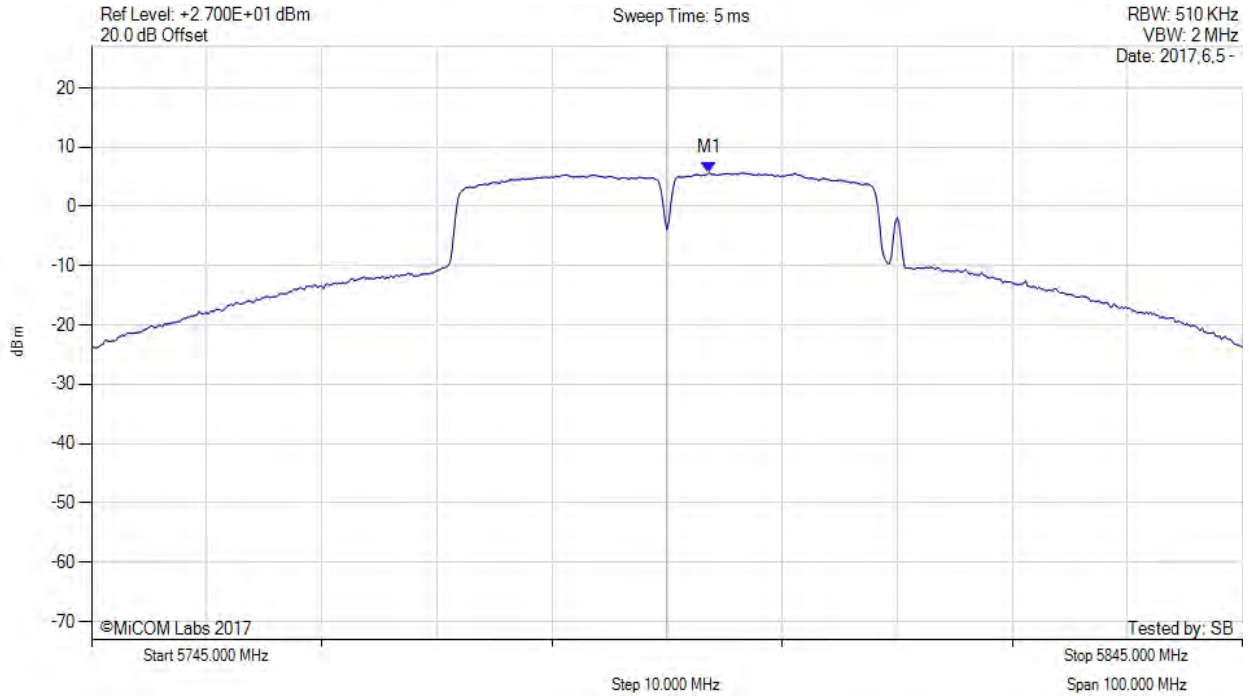

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5798.700 MHz : 5.708 dBm M1 + DCCF : 5798.700 MHz : 5.752 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -21.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** MikroTik RBLHGG-5aCD Wireless Module  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** MIKO60-U2\_Conducted Rev A  
**Issue Date:** 23<sup>rd</sup> October 2017  
**Page:** 158 of 159

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5795.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

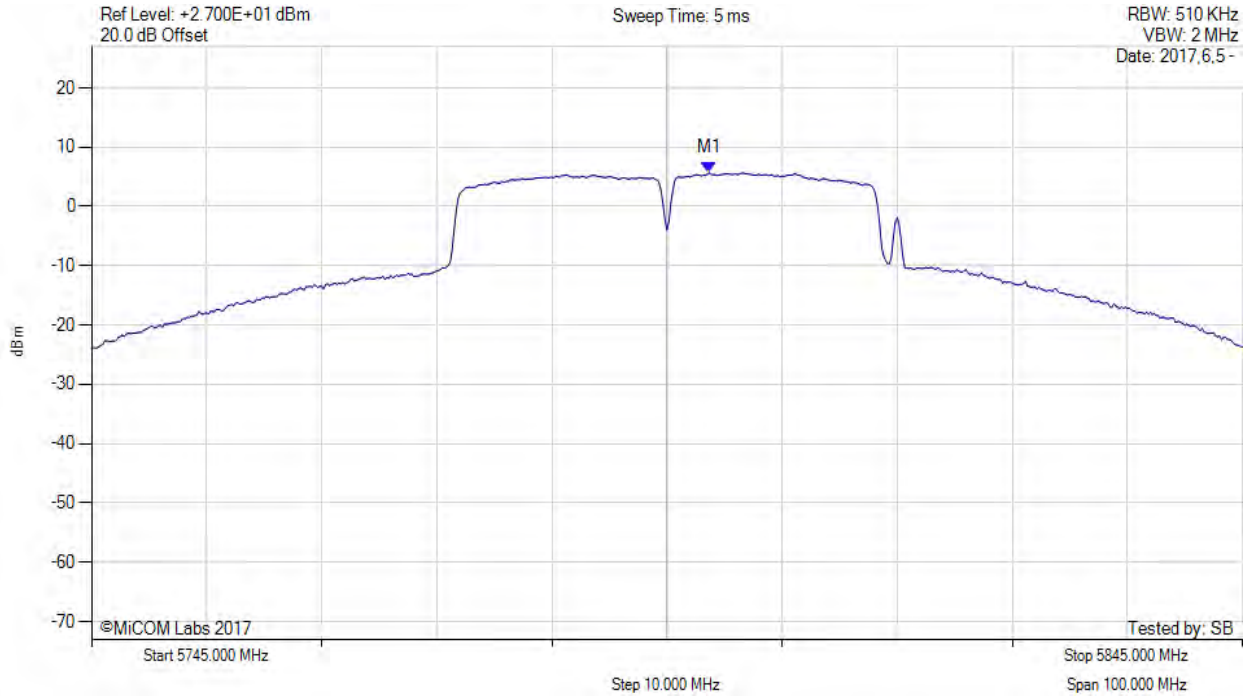

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5798.700 MHz : 5.682 dBm M1 + DCCF : 5798.700 MHz : 5.726 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 27.0$ dBm Margin: -21.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)