

**SUBMITTAL
APPLICATION
REPORT**

**FOR
GRANT OF CERTIFICATION**

FOR


**Model: Metal 2SHPn
2412-2462 MHz
Broadband Digital Transmission System
FCC ID: TV7METL2SHPN**

FOR

MIKROTIKLS SIA
Pernavas 46
Riga, Latvia LV-1009

Test Report Number: 120424

Authorized Signatory: *Scot D Rogers*
Scot D. Rogers



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Engineering Test Report For Application of Grant of Certification

FOR
CFR 47, PART 15C - Intentional Radiators
CFR 47 Paragraph 15.247
License Exempt Intentional Radiator

For

MIKROTIKLS SIA

Pernavas 46
Riga, Latvia LV-1009

Broadband Digital Transmission System
Model: Metal 2SHPn
Frequency Range 2412-2462 MHz
FCC ID#: TV7METL2SHPN

Test Date: April 24, 2012

Certifying Engineer: *Scot D. Rogers*
Scot D. Rogers
Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product endorsement by NVLAP, NIST, or any agency of the U.S. Government.



Table Of Contents

TABLE OF CONTENTS..... 3

FORWARD 6

OPINION / INTERPRETATION OF RESULTS 6

ENVIRONMENTAL CONDITIONS..... 6

EQUIPMENT TESTED..... 6

APPLICATION FOR CERTIFICATION..... 7

APPLICABLE STANDARDS & TEST PROCEDURES 8

EQUIPMENT FUNCTION AND CONFIGURATION..... 8

Equipment Configuration.....9

TEST SITE LOCATIONS 9

UNITS OF MEASUREMENTS 9

TEST PROCEDURES..... 10

AC Line Conducted Emission Test Procedure10

Radiated Emission Test Procedure.....10

LIST OF TEST EQUIPMENT 11

INTENTIONAL RADIATORS..... 12

Antenna Requirements12

Restricted Bands of Operation.....12

 General Radiated Emissions in Restricted Bands Data (worst-case)..... 12

 Harmonic Radiated Emissions in Restricted Bands Data (15 dBi Omni, WLO-2450-15) 13

 Harmonic Radiated Emissions in Restricted Bands Data (13 dBi Omni, HP, ODH 24-13)..... 14

 Harmonic Radiated Emissions in Restricted Bands Data (20 dBi Panel, WLP-2450-20) 15

 Harmonic Radiated Emissions in Restricted Bands Data (17 dBi Sector, SA 24-90-17-WB) 16

 Harmonic Radiated Emissions in Restricted Bands Data (24 dBi Dish, DC 24-HD-PFIP)..... 17



Summary of Results for Radiated Emissions in Restricted Bands17

AC Line Conducted Emissions Procedure18

Figure 1 AC Line Conducted Emissions Line 119

Figure 2 AC Line Conducted Emissions Line 219

AC Line Conducted Emissions Data (Highest Emissions)20

Summary of Results for AC Line Conducted Emissions20

General Radiated Emissions Procedure21

General Radiated Emissions from EUT Data (Highest Emissions)22

Summary of Results for General Radiated Emissions22

Operation in the Band 2400 – 2483.5 MHz23

Figure 3 Plot of Output Across Operational Band (5 MHz Mode)23

Figure 4 Plot of Output Across Operational Band (10 MHz Mode)24

Figure 5 Plot of Output Across Operational Band (20 MHz Mode)24

Figure 6 Plot of Output Across Operational Band (20 MHz, B/G/N Mode)25

Figure 7 Plot of Output Across Operational Band (40 MHz Mode)25

Figure 8 Plot of 6dB Band width (5 MHz Mode, 2412 MHz)26

Figure 9 Plot of 6dB Band width (5 MHz Mode, 2437 MHz)26

Figure 10 Plot of 6dB Band width (5 MHz Mode, 2457 MHz)27

Figure 11 Plot of 6dB Band width (5 MHz Mode, 2462 MHz)27

Figure 12 Plot of 6dB Band width (10 MHz Mode, 2412 MHz)28

Figure 13 Plot of 6dB Band width (10 MHz Mode, 2437 MHz)28

Figure 14 Plot of 6dB Band width (10 MHz Mode, 2457 MHz)29

Figure 15 Plot of 6dB Band width (10 MHz Mode, 2462 MHz)29

Figure 16 Plot of 6dB Band width (20 MHz Mode, 2412 MHz)30

Figure 17 Plot of 6dB Band width (20 MHz Mode, 2437 MHz)30

Figure 18 Plot of 6dB Band width (20 MHz Mode, 2457 MHz)31

Figure 19 Plot of 6dB Band width (20 MHz Mode, 2462 MHz)31

Figure 20 Plot of 6dB Band width (40 MHz Mode, 2422 MHz)32

Figure 21 Plot of 6dB Band width (40 MHz Mode, 2447 MHz)32

Figure 22 Plot of 6dB Band width (40 MHz Mode, 2452 MHz)33

Figure 23 Plot of Power Spectral Density (5 MHz Mode, 2412 MHz)33

Figure 24 Plot Power Spectral Density (5 MHz Mode, 2437 MHz)34

Figure 25 Plot Power Spectral Density (5 MHz Mode, 2457 MHz)34



Figure 26 Plot of Power Spectral Density (5 MHz Mode, 2462 MHz)35

Figure 27 Plot of Power Spectral Density (10 MHz Mode, 2412 MHz)35

Figure 28 Plot of Power Spectral Density (10 MHz Mode, 2437 MHz)36

Figure 29 Plot of Power Spectral Density (10 MHz Mode, 2457 MHz)36

Figure 30 Plot of Power Spectral Density (10 MHz Mode, 2462 MHz)37

Figure 31 Plot of Power Spectral Density (20 MHz Mode, 2412 MHz)37

Figure 32 Plot of Power Spectral Density (20 MHz Mode, 2437 MHz)38

Figure 33 Plot of Power Spectral Density (20 MHz Mode, 2457 MHz)38

Figure 34 Plot of Power Spectral Density (20 MHz Mode, 2462 MHz)39

Figure 35 Plot of Power Spectral Density (40 MHz Mode, 2422 MHz)39

Figure 36 Plot of Power Spectral Density (40 MHz Mode, 2447 MHz)40

Figure 37 Plot of Power Spectral Density (40 MHz Mode, 2452 MHz)40

Figure 38 Plot of Lower Band Edge41

Figure 39 Plot of Upper Band Edge.....41

Transmitter Antenna Conducted Emissions Data.....42

Transmitter Radiated Emissions Data43

Transmitter Radiated Emission (15 dBi Omni WLO-2450-15).....43

Transmitter Radiated Emission (13 dBi Omni HP, ODH 24-13)44

Transmitter Radiated Emission (20 dBi Panel, WLP-2450-20).....45

Transmitter Radiated Emission (17 dBi Sector, SA 24-90-17-WB).....46

Transmitter Radiated Emission (24 dBi Dish, DC 24-HD-PFIP).....47

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator48

STATEMENT OF MODIFICATIONS AND DEVIATIONS 48

ANNEX..... 49

Annex A Measurement Uncertainty Calculations.....50

Annex B Rogers Labs Test Equipment List.....52

Annex C Rogers Qualifications53

Annex D FCC Site Registration Letter.....54

Annex E Industry Canada Site Registration Letter55



Forward

The following information is submitted for consideration in obtaining Grant of Certification for License Exempt Digital Transmission System Intentional Radiator operating under CFR 47 Paragraph 15.247.

Name of Applicant:
Mikrotiks SIA
Pernavas 46
Riga, Latvia LV-1009

Model: Metal 2SHPn
FCC I.D.: TV7METL2SHPN FRN: 0014 43 1100
Frequency Range: 2412-2462 MHz
Operating Power: 30.00 dBm, (1000 mW) antenna port conducted

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Emissions as per CFR 47 paragraphs 2 and 15.205	-0.2	Complies
Emissions as per CFR 47 paragraphs 2 and 15.207	-7.6	Complies
Emissions as per CFR 47 paragraphs 2 and 15.209	-0.7	Complies
Emissions as per CFR 47 paragraphs 2 and 15.247	-9.0	Complies

Environmental Conditions

Ambient Temperature 19.3° C
Relative Humidity 38%
Atmospheric Pressure 1010.8 mb

Equipment Tested

<u>Equipment</u>	<u>Model</u>	<u>FCC I.D.</u>
EUT	Metal 2SHPn	TV7METL2SHPN
Power Over Ethernet (POE)	N/A	N/A
AC Adapter	KSAS0242400080HU	N/A
Dell Studio XPS	921LBN1	N/A
Omni Directional Antenna	WLO-2450-15	N/A
Omni Directional Antenna	HP, ODH 24-13	N/A
Panel Antenna	WLP-2450-20	N/A
Sector Antenna	SA 24-90-17-WB	N/A
Dish Antenna	DC 24-HD-PFIP	N/A

Application for Certification

- (1) Manufacturer: Mikrotiks SIA
Pernavas 46
Riga, Latvia LV-1009
- (2) Identification: Model: Metal 2SHPn
FCC ID.: TV7METL2SHPN
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from power received through POE (Power Over Ethernet) with authorized AC power adapter. The design offers connection ports for network and external antenna only and was interfaced through network cable to laptop computer during testing.
- (9) Transition Provisions of 15.37 are not being requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.



Applicable Standards & Test Procedures


In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2011, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.247 the following information is submitted.

Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI C63.4-2009 Document, FCC document KDB 558074. Testing for the AC line-conducted emissions were performed as defined in sections 7 and 13.1.3, testing of the radiated emissions was performed as defined in sections 8 and 13.1.4 of ANSI C63.4-2009. Testing of the intentional radiated emissions was performed as defined in section 13 of ANSI C63.4-2009.

Equipment Function and Configuration

The EUT is a 2412-2462 MHz Digital Transmission System transmitter used to transmit data in applications offering broadband wireless connectivity. The equipment is marketed for use to incorporate a wireless link to exchange data information from one point to another. For testing purposes the Metal 2SHPn transceiver was connected to the manufacturer supplied POE/AC power adapter and communicating to the laptop computer. The network interface offered operational control of the transmitter and communications over the network interface between the EUT and supporting computer system. The EUT offers connection ports for authorized external antennas and network only and requires power supplied from POE, no other interfacing options are provided on the design. For testing purposes the Metal 2SHPn was powered from the POE/AC power adapter and set to transmit in available data modes. The device is marketed for professionally installed use and complies with the unique antenna connection requirements.

Equipment Configuration

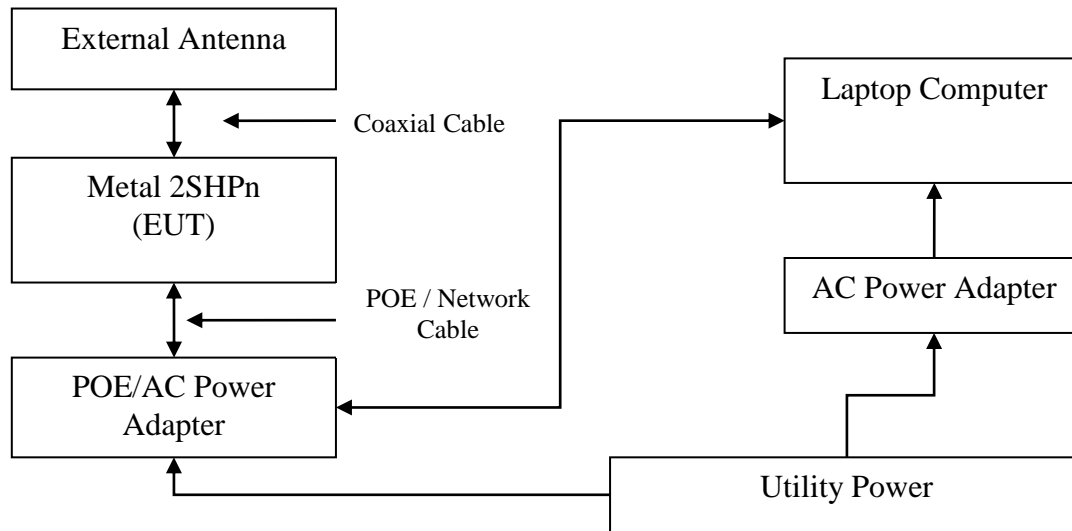

Test Site Locations

Conducted EMI The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS

Radiated EMI The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS

Site Registration Refer to Annex for Site Registration Letters

NVLAP Accreditation Lab code 200087-0

Units of Measurements

Conducted EMI Data is in dB μ V; dB referenced to one microvolt

Radiated EMI Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses

$RFS (dB\mu V/m @ 3m) = FSM (dB\mu V) + A.F. (dB) - Gain (dB)$

Test Procedures

AC Line Conducted Emission Test Procedure

The EUT operates from DC power only and must be connected to an approved POE/AC adapter for operation. For testing purposes, the manufacturer supplied POE/AC power adapter was used to power the EUT and system. Testing for the AC line-conducted emissions testing was performed as defined in sections 7 and 13.1.3 of ANSI C63.4-2009. The test setup including the EUT was arranged in typical equipment configurations and placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50 μ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table.

Radiated Emission Test Procedure

The EUT was placed on a rotating 1 x 1.5-meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. Testing for the radiated emissions was performed as defined in sections 8 and 13.1.4 of ANSI C63.4-2009. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. Refer to photographs in the test setup exhibits for EUT placement during testing.

List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

HP 8591 EM Analyzer Settings		
Conducted Emissions		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Radiated Emissions		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
HP 8562A Analyzer Settings		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Calibration Date</u>	<u>Due</u>
LISN	Comp. Design	FCC-LISN-2-MOD.CD	10/11	10/12
Antenna	ARA	BCD-235-B	10/11	10/12
Antenna	EMCO	3147	10/11	10/12
Antenna	EMCO	3143	5/11	5/12
Analyzer	HP	8591EM	5/11	5/12
Analyzer	HP	8562A	5/11	5/12
Analyzer	Rohde & Schwarz	ESU40	5/11	5/12

Intentional Radiators

As per CFR47, Subpart C, paragraph 15.247 the following information is submitted.

Antenna Requirements

The EUT is produced with N-connector for connection to authorized external antenna systems. The design is marketed for professional installation and use as described in accompanying documentation. The antenna connection point complies with the unique antenna connection requirements. The requirements of 15.203 are fulfilled and there are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at a distance of three meters at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were measured at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. No other significant emission was observed which fell into the restricted bands of operation.

General Radiated Emissions in Restricted Bands Data (worst-case)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Quasi-Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Quasi-Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
73.2	32.6	28.3	N/A	42.9	39.2	N/A	40.0
73.9	32.1	28.3	N/A	43.8	39.3	N/A	40.0
74.6	34.4	31.9	N/A	42.0	39.2	N/A	40.0
75.2	31.9	28.7	N/A	40.6	39.0	N/A	40.0
1600.0	46.8	N/A	39.4	44.8	N/A	34.1	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.



Harmonic Radiated Emissions in Restricted Bands Data (15 dBi Omni, WLO-2450-15)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	43.4	N/A	31.2	58.5	N/A	46.6	54.0
2483.5	44.4	N/A	31.7	50.6	N/A	37.5	54.0
4824.0	48.7	N/A	36.0	49.3	N/A	37.4	54.0
4874.0	48.2	N/A	35.6	48.6	N/A	35.6	54.0
4924.0	54.0	N/A	16.6	16.1	N/A	34.7	54.0
7236.0	45.7	N/A	31.8	44.4	N/A	31.7	54.0
7311.0	41.8	N/A	29.0	41.3	N/A	28.9	54.0
7386.0	54.0	N/A	16.6	16.1	N/A	31.3	54.0
12060.0	47.6	N/A	34.8	47.9	N/A	34.9	54.0
12185.0	45.9	N/A	33.6	46.6	N/A	34.1	54.0
12310.0	46.5	N/A	33.9	47.2	N/A	34.4	54.0
14472.0	49.8	N/A	37.5	49.4	N/A	37.2	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.



Harmonic Radiated Emissions in Restricted Bands Data (13 dBi Omni, HP, ODH 24-13)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Quasi-Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Quasi-Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
2390.0	62.7	N/A	51.8	43.0	N/A	30.4	54.0
2483.5	51.3	N/A	39.1	43.7	N/A	30.9	54.0
4824.0	46.6	N/A	33.9	45.4	N/A	33.2	54.0
4874.0	45.6	N/A	33.0	45.8	N/A	33.1	54.0
4924.0	54.0	N/A	16.6	16.1	N/A	32.6	54.0
7236.0	46.1	N/A	32.4	44.6	N/A	32.4	54.0
7311.0	43.6	N/A	31.0	43.2	N/A	30.9	54.0
7386.0	54.0	N/A	16.6	16.1	N/A	30.9	54.0
12060.0	46.0	N/A	33.4	46.3	N/A	33.3	54.0
12185.0	45.6	N/A	32.9	45.8	N/A	33.3	54.0
12310.0	46.3	N/A	33.6	45.7	N/A	32.9	54.0
14472.0	49.6	N/A	37.2	50.2	N/A	36.9	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.



Harmonic Radiated Emissions in Restricted Bands Data (20 dBi Panel, WLP-2450-20)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	44.4	N/A	30.7	65.2	N/A	53.6	54.0
2483.5	43.8	N/A	30.9	57.2	N/A	44.8	54.0
4824.0	47.8	N/A	35.4	48.1	N/A	35.5	54.0
4874.0	48.2	N/A	35.1	48.0	N/A	35.1	54.0
4924.0	54.0	N/A	16.6	16.1	N/A	32.6	54.0
7236.0	47.8	N/A	34.9	47.9	N/A	34.9	54.0
7311.0	45.2	N/A	33.0	45.3	N/A	32.9	54.0
7386.0	54.0	N/A	16.6	16.1	N/A	30.9	54.0
12060.0	47.4	N/A	34.3	46.5	N/A	34.3	54.0
12185.0	45.5	N/A	33.5	46.3	N/A	34.0	54.0
12310.0	45.3	N/A	32.9	46.3	N/A	33.7	54.0
14472.0	50.0	N/A	37.0	49.4	N/A	36.8	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.



Harmonic Radiated Emissions in Restricted Bands Data (17 dBi Sector, SA 24-90-17-WB)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	42.8	N/A	30.1	65.2	N/A	53.1	54.0
2483.5	43.7	N/A	30.9	53.9	N/A	41.8	54.0
4824.0	48.5	N/A	35.9	49.5	N/A	38.2	54.0
4874.0	48.6	N/A	35.4	47.6	N/A	35.5	54.0
4924.0	54.0	N/A	16.6	16.1	N/A	34.7	54.0
7236.0	46.9	N/A	34.4	47.4	N/A	34.4	54.0
7311.0	44.6	N/A	32.2	45.1	N/A	32.3	54.0
7386.0	54.0	N/A	16.6	16.1	N/A	28.7	54.0
12060.0	47.1	N/A	34.5	47.5	N/A	34.6	54.0
12185.0	47.0	N/A	34.2	45.8	N/A	33.6	54.0
12310.0	48.1	N/A	34.6	47.1	N/A	33.9	54.0
14472.0	47.9	N/A	35.6	48.3	N/A	36.0	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Harmonic Radiated Emissions in Restricted Bands Data (24 dBi Dish, DC 24-HD-PFIP)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Quasi-Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Quasi-Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
2390.0	44.0	N/A	30.3	64.5	N/A	53.8	54.0
2483.5	43.7	N/A	30.9	64.2	N/A	51.3	54.0
4824.0	45.6	N/A	33.1	54.3	N/A	45.0	54.0
4874.0	46.7	N/A	33.1	46.0	N/A	33.3	54.0
4924.0	54.0	N/A	16.6	16.1	N/A	31.8	54.0
7236.0	45.5	N/A	32.3	44.3	N/A	32.1	54.0
7311.0	43.6	N/A	31.4	43.9	N/A	31.5	54.0
7386.0	54.0	N/A	16.6	16.1	N/A	30.5	54.0
12060.0	44.5	N/A	32.1	44.9	N/A	32.5	54.0
12185.0	45.6	N/A	33.2	45.6	N/A	32.8	54.0
12310.0	46.4	N/A	33.5	45.6	N/A	33.3	54.0
14472.0	49.9	N/A	37.1	49.8	N/A	37.3	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements of CFR 47 Part 15C Intentional Radiators. The EUT demonstrated a minimum margin of -0.2 dB below the requirements. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

AC Line Conducted Emissions Procedure

The EUT was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. The manufacturer supplied POE/AC power adapter for the EUT was connected to the LISN. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor, internal to the LISN. Power line conducted emissions testing were carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequency of each radio frequency emission displaying the highest amplitude. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then the data was recorded with maximum conducted emissions levels. Refer to figures one and two for plots of the EUT POE/AC Power Line conducted emissions.

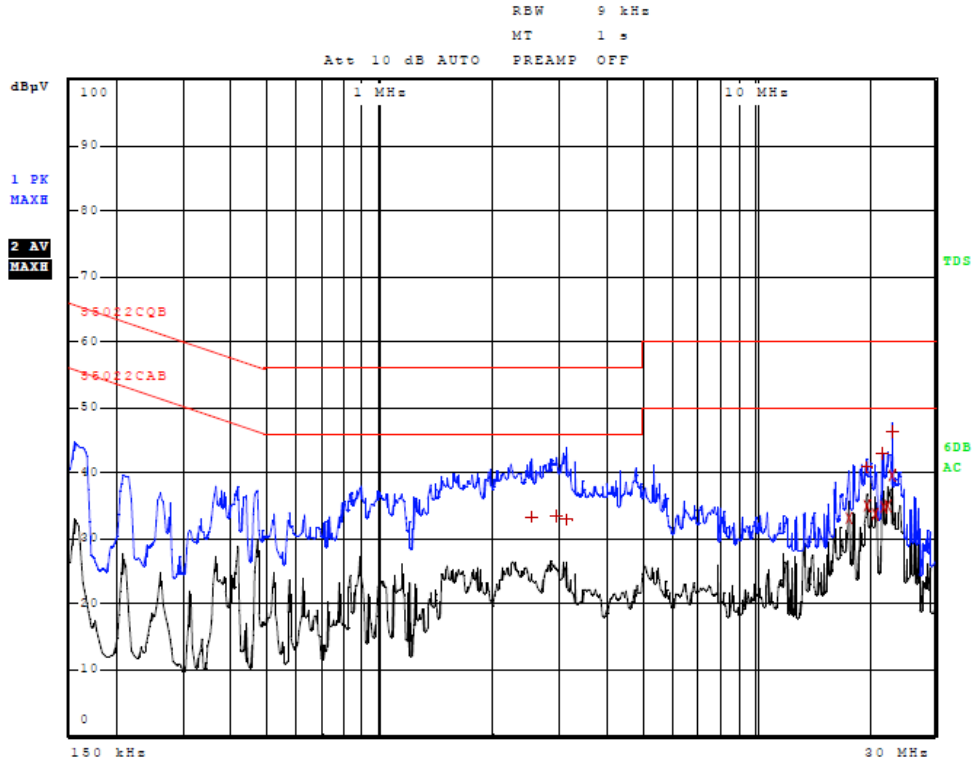


Figure 1 AC Line Conducted Emissions Line 1

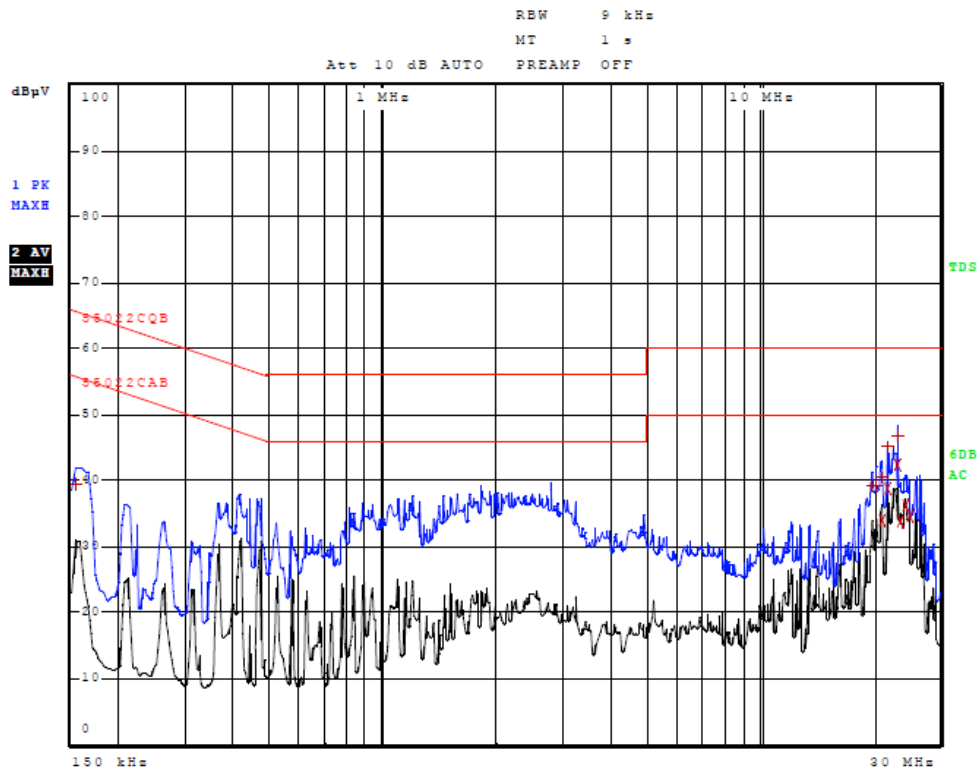


Figure 2 AC Line Conducted Emissions Line 2



AC Line Conducted Emissions Data (Highest Emissions)

Line 1

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	2.526000000 MHz	33.38	Quasi Peak	-22.62
1	2.962000000 MHz	33.43	Quasi Peak	-22.57
1	3.118000000 MHz	32.96	Quasi Peak	-23.04
2	17.692000000 MHz	33.14	Average	-16.86
2	19.708000000 MHz	34.88	Average	-15.12
1	19.708000000 MHz	40.97	Quasi Peak	-19.03
2	20.808000000 MHz	33.71	Average	-16.29
1	21.664000000 MHz	43.02	Quasi Peak	-16.98
2	21.908000000 MHz	34.68	Average	-15.32
2	22.456000000 MHz	35.05	Average	-14.95
2	23.128000000 MHz	39.68	Average	-10.32
1	23.128000000 MHz	46.31	Quasi Peak	-13.69

Line 2

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	154.000000000 kHz	39.38	Quasi Peak	-26.40
1	19.708000000 MHz	39.15	Quasi Peak	-20.85
1	20.380000000 MHz	39.20	Quasi Peak	-20.80
2	21.052000000 MHz	33.95	Average	-16.05
1	21.052000000 MHz	40.47	Quasi Peak	-19.53
2	21.664000000 MHz	38.73	Average	-11.27
1	21.664000000 MHz	45.05	Quasi Peak	-14.95
2	23.128000000 MHz	42.34	Average	-7.66
1	23.128000000 MHz	46.78	Quasi Peak	-13.22
2	23.372000000 MHz	33.62	Average	-16.38
2	24.348000000 MHz	36.32	Average	-13.68
2	24.900000000 MHz	34.54	Average	-15.46

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for AC Line Conducted Emissions

The EUT demonstrated compliance with the conducted emissions requirements of CFR47 Part 15C equipment. The EUT demonstrated minimum margin of -7.6 dB below the limit.

Measurements were taken using the peak, quasi peak, and average, measurement function for each emissions amplitude and were below the limits stated in the specification. Other emissions were present with recorded data representing worst-case amplitudes.



General Radiated Emissions Procedure

The EUT was arranged in a typical equipment configuration and operated through all available modes with worst-case data recorded. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 30 MHz to 25,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or double Ridge or pyramidal horns and mixers from 1 GHz to 25 GHz, notch filters and appropriate amplifiers and external mixers were utilized.

General Radiated Emissions from EUT Data (Highest Emissions)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
73.2	32.6	28.3	N/A	42.9	39.2	N/A	40.0
73.9	32.1	28.3	N/A	43.8	39.3	N/A	40.0
74.6	34.4	31.9	N/A	42.0	39.2	N/A	40.0
75.2	31.9	28.7	N/A	40.6	39.0	N/A	40.0
76.6	36.4	32.2	N/A	41.3	38.3	N/A	40.0
77.2	38.2	35.6	N/A	41.3	39.2	N/A	40.0
81.2	39.5	35.2	N/A	42.7	39.2	N/A	40.0
103.4	33.4	29.4	N/A	35.0	31.7	N/A	43.5
104.7	38.3	33.2	N/A	43.6	41.0	N/A	43.5
212.3	25.9	20.7	N/A	22.3	16.1	N/A	43.5
229.3	30.4	25.3	N/A	22.9	18.7	N/A	46.0
237.5	30.8	25.7	N/A	25.3	21.3	N/A	46.0
268.3	34.4	30.6	N/A	25.4	20.2	N/A	46.0
800.0	34.4	32.3	N/A	30.7	27.7	N/A	46.0
875.0	28.4	24.1	N/A	33.7	31.7	N/A	46.0
1600.0	46.8	N/A	39.4	44.8	N/A	34.1	54.0
2150.0	48.1	N/A	43.7	48.1	N/A	44.5	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15C paragraph 15.209 Intentional Radiators. The EUT demonstrated a minimum margin of -0.7 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the Band 2400 – 2483.5 MHz

EUT emissions were measured at the antenna port and also the open area test site at a three-meter distance. The EUT was placed on a wooden turntable 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. The peak and quasi-peak amplitude of the frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of emissions above 1000 MHz were measured using a spectrum analyzer and data recorded from the analyzer measurement result. Plots were made of transmitter performance taken at the antenna port connector. Refer to figures three through thirty-nine showing plots taken of the EUT performance displaying compliance with the specifications.

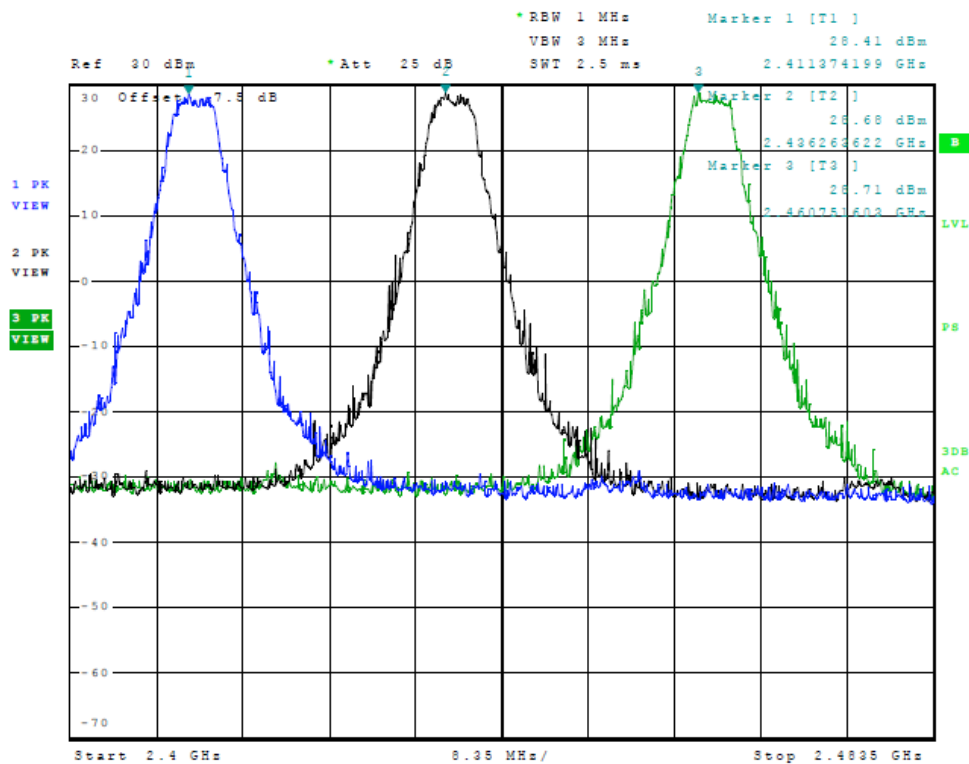


Figure 3 Plot of Output Across Operational Band (5 MHz Mode)

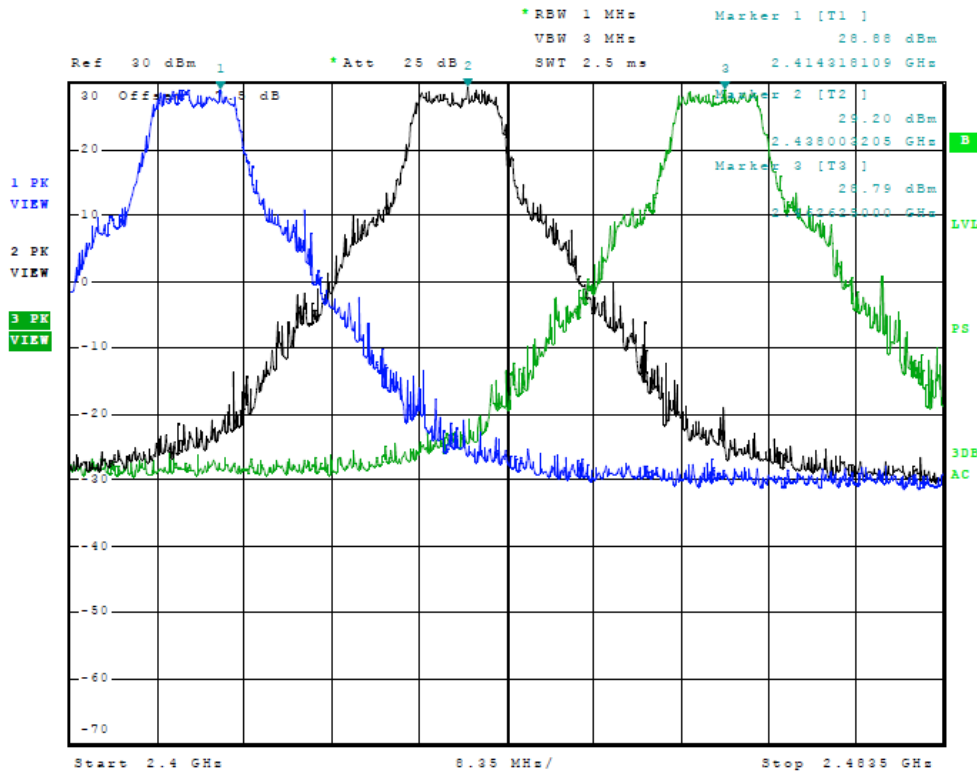


Figure 4 Plot of Output Across Operational Band (10 MHz Mode)

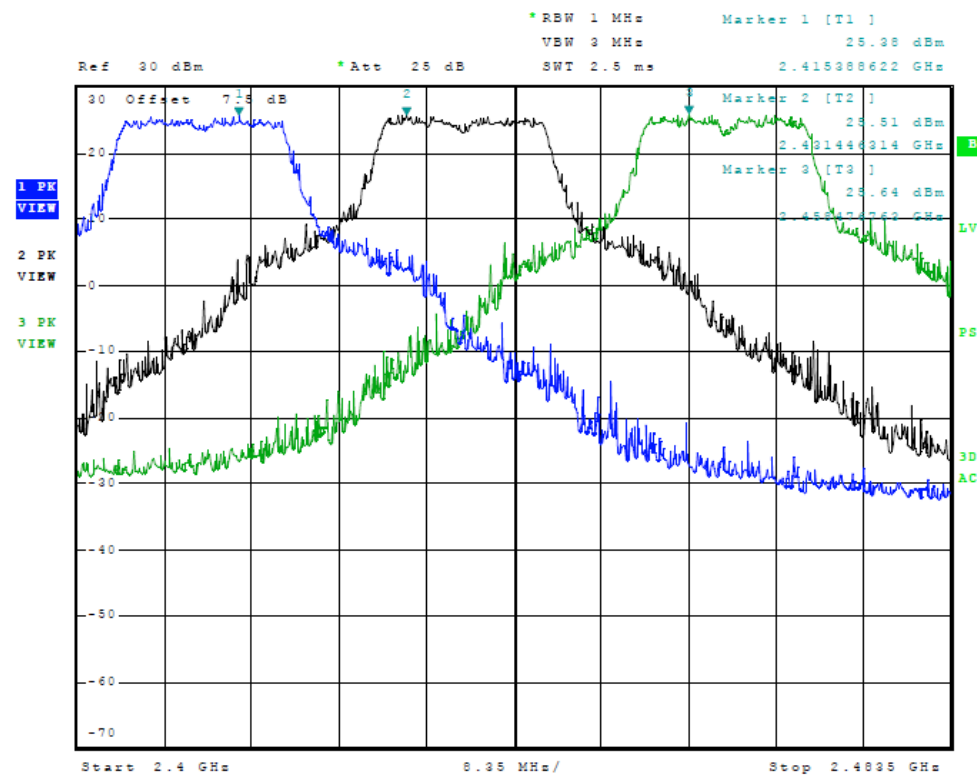


Figure 5 Plot of Output Across Operational Band (20 MHz Mode)

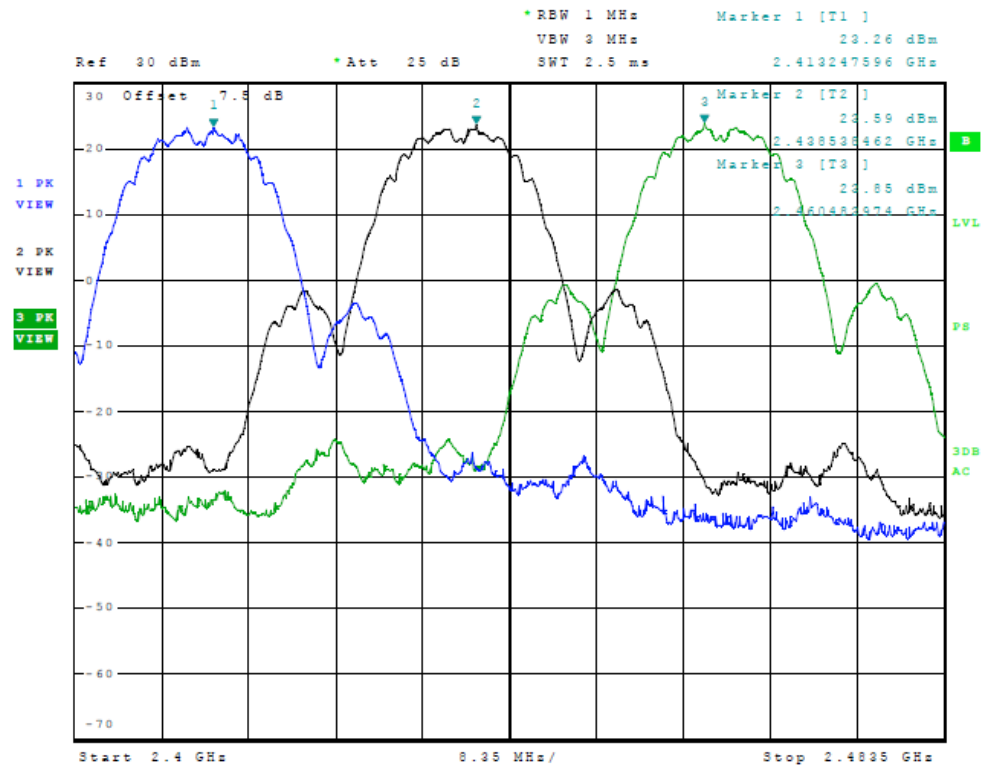


Figure 6 Plot of Output Across Operational Band (20 MHz, B/G/N Mode)

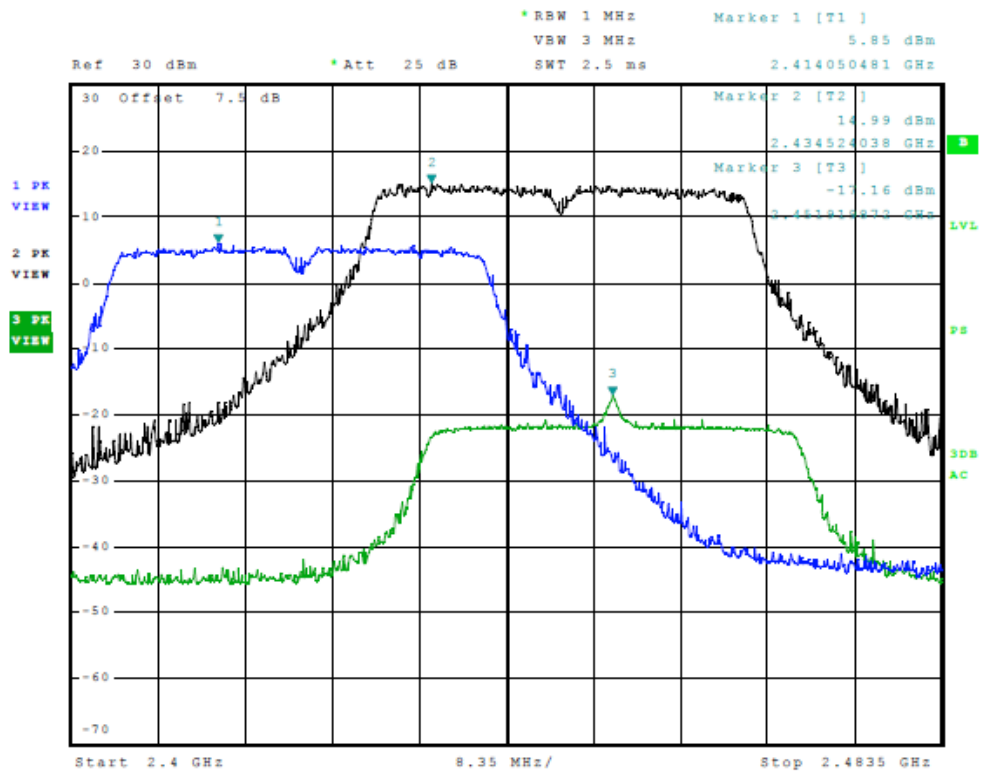


Figure 7 Plot of Output Across Operational Band (40 MHz Mode)

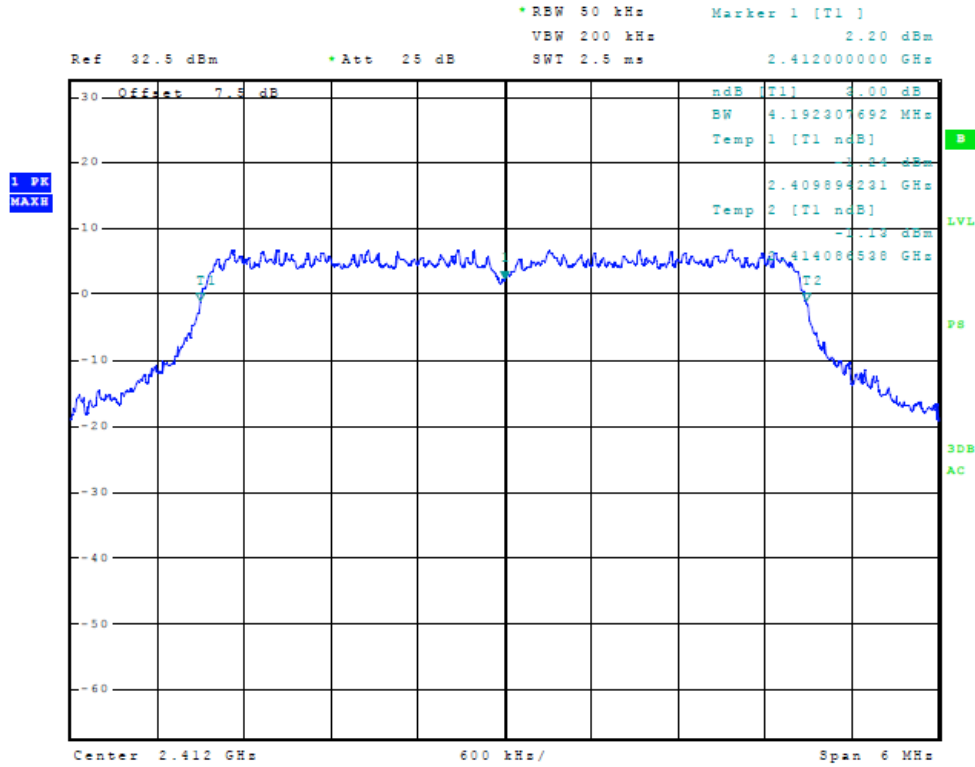


Figure 8 Plot of 6dB Band width (5 MHz Mode, 2412 MHz)

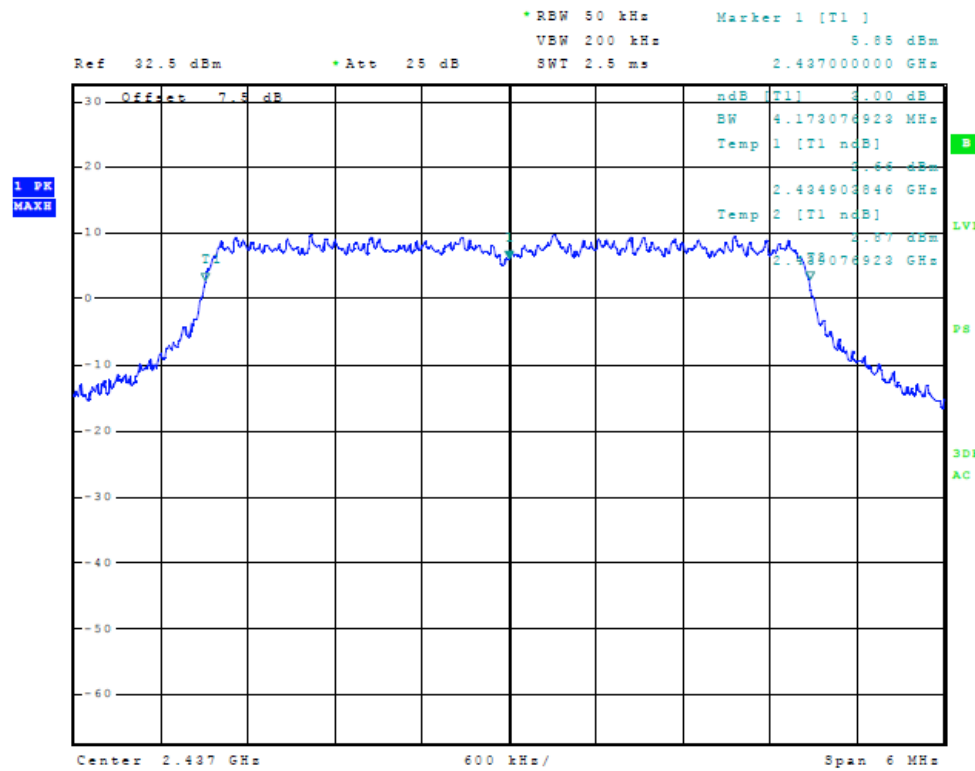


Figure 9 Plot of 6dB Band width (5 MHz Mode, 2437 MHz)

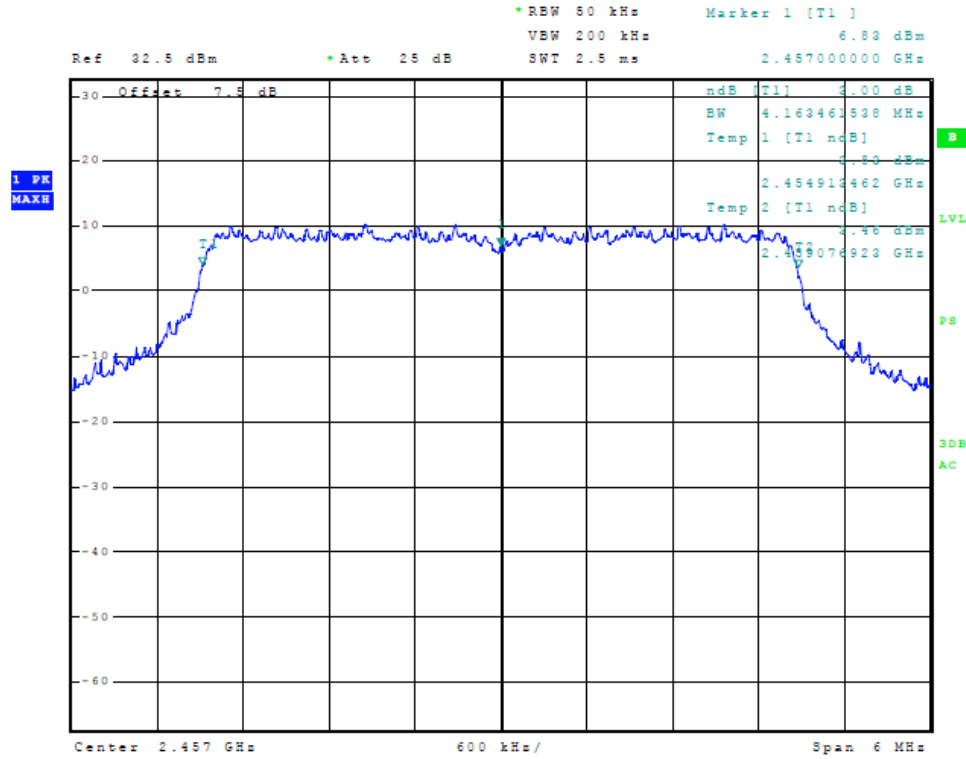


Figure 10 Plot of 6dB Band width (5 MHz Mode, 2457 MHz)

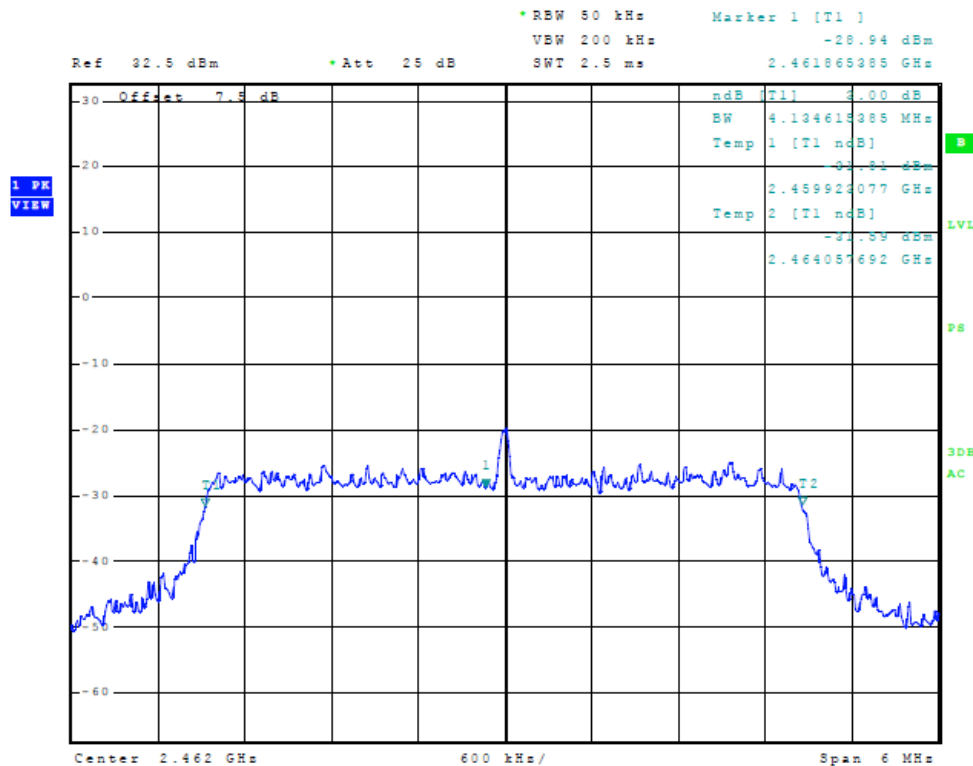


Figure 11 Plot of 6dB Band width (5 MHz Mode, 2462 MHz)

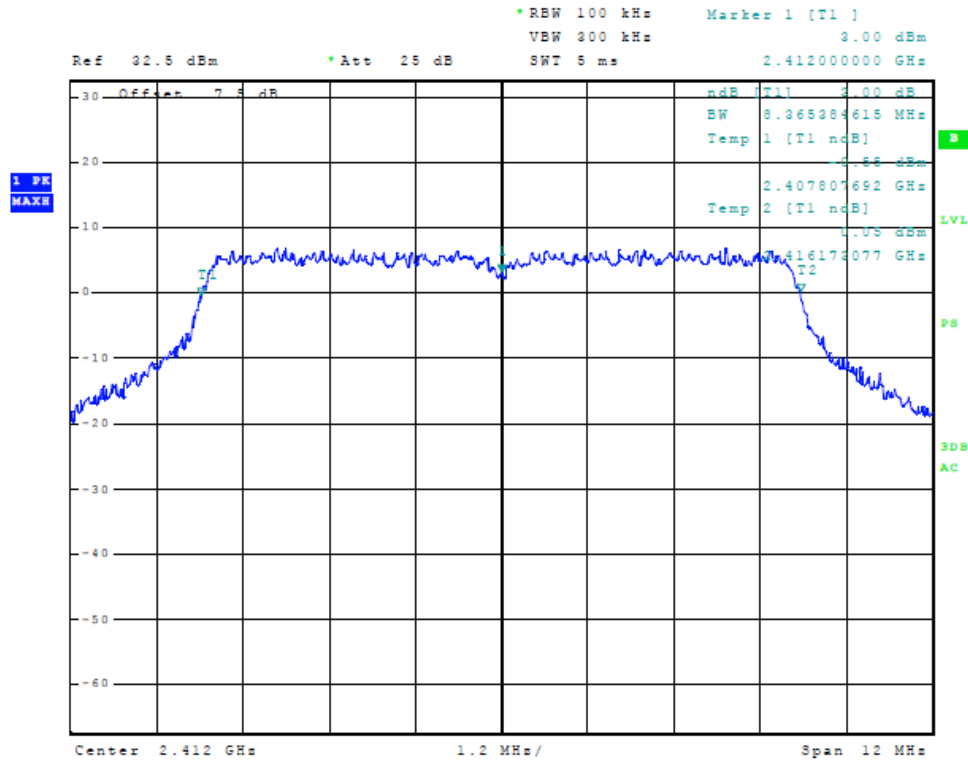


Figure 12 Plot of 6dB Band width (10 MHz Mode, 2412 MHz)

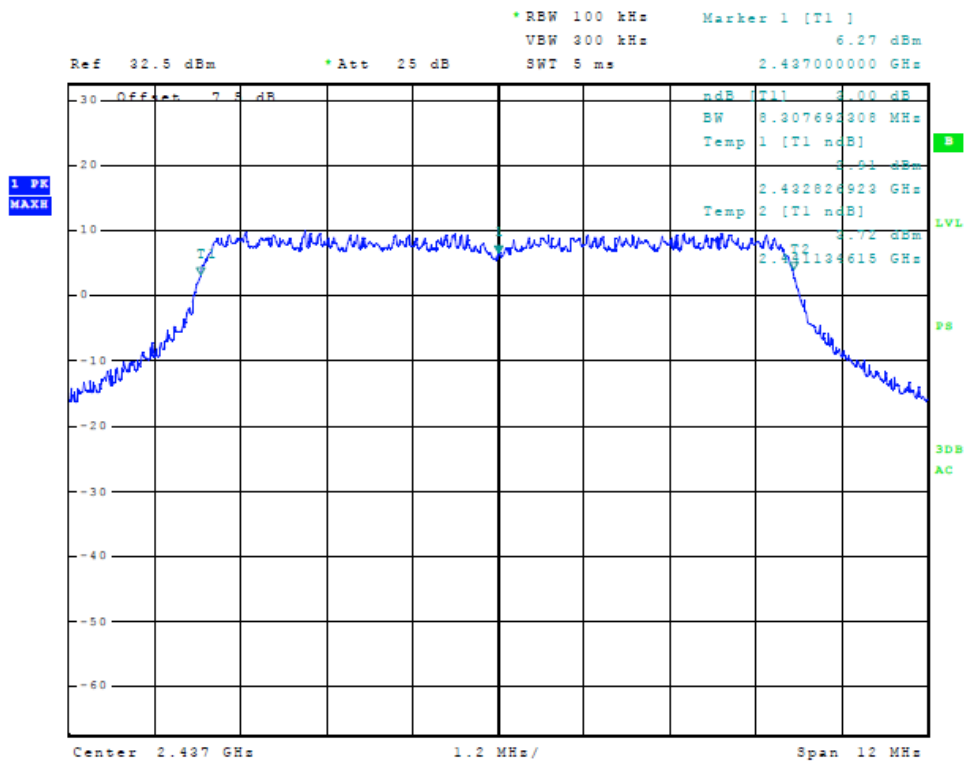


Figure 13 Plot of 6dB Band width (10 MHz Mode, 2437 MHz)

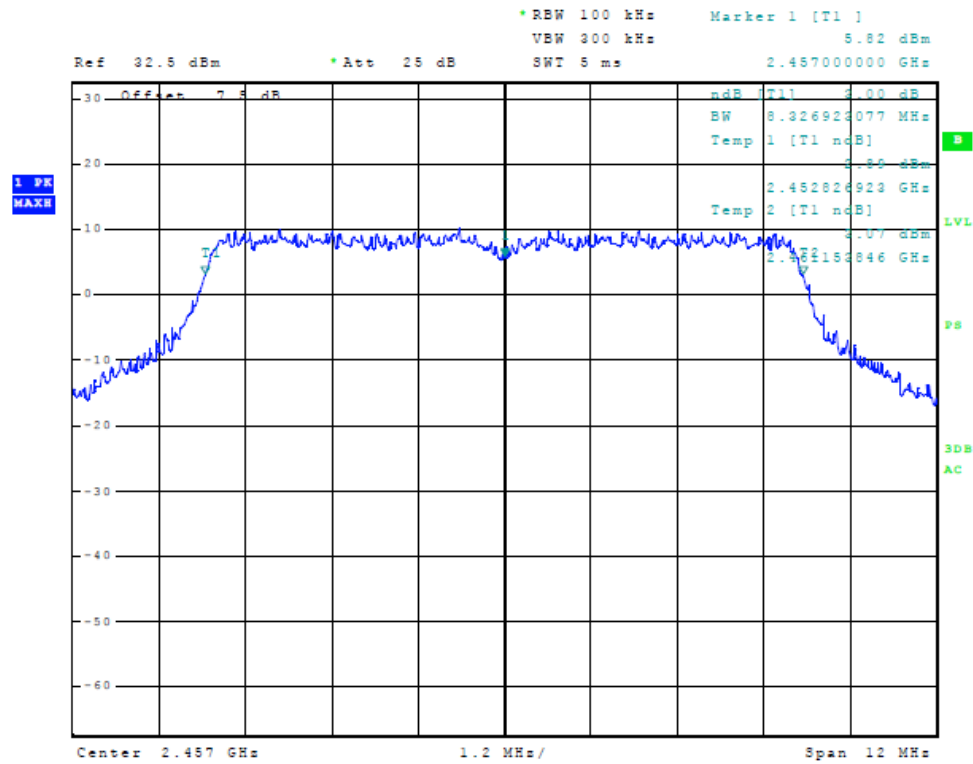


Figure 14 Plot of 6dB Band width (10 MHz Mode, 2457 MHz)

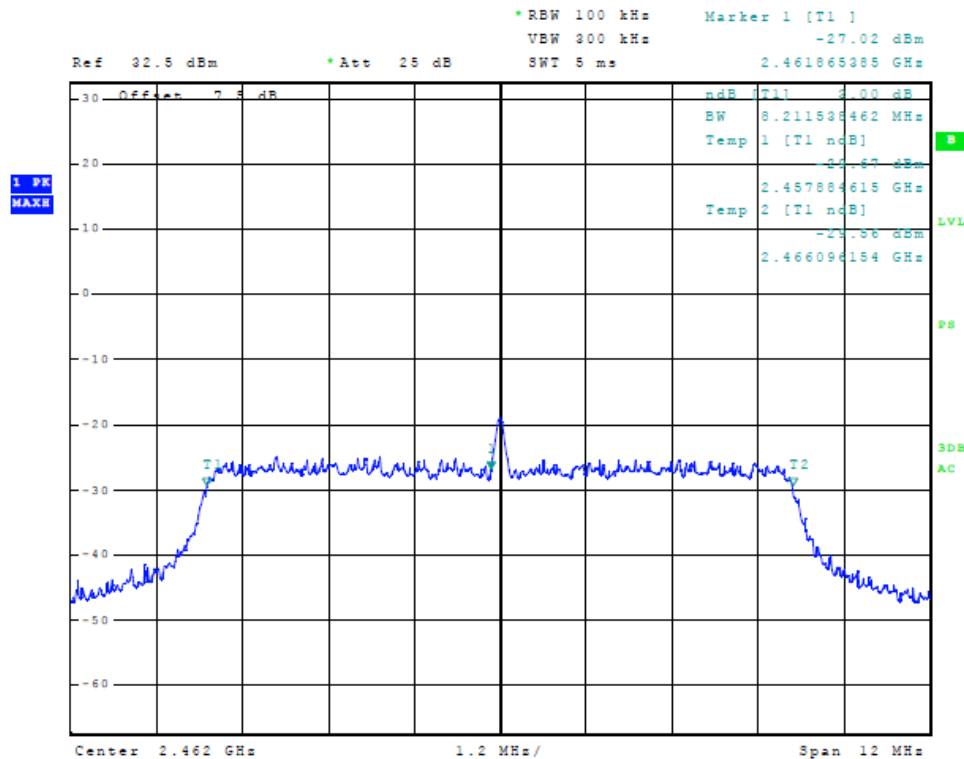


Figure 15 Plot of 6dB Band width (10 MHz Mode, 2462 MHz)

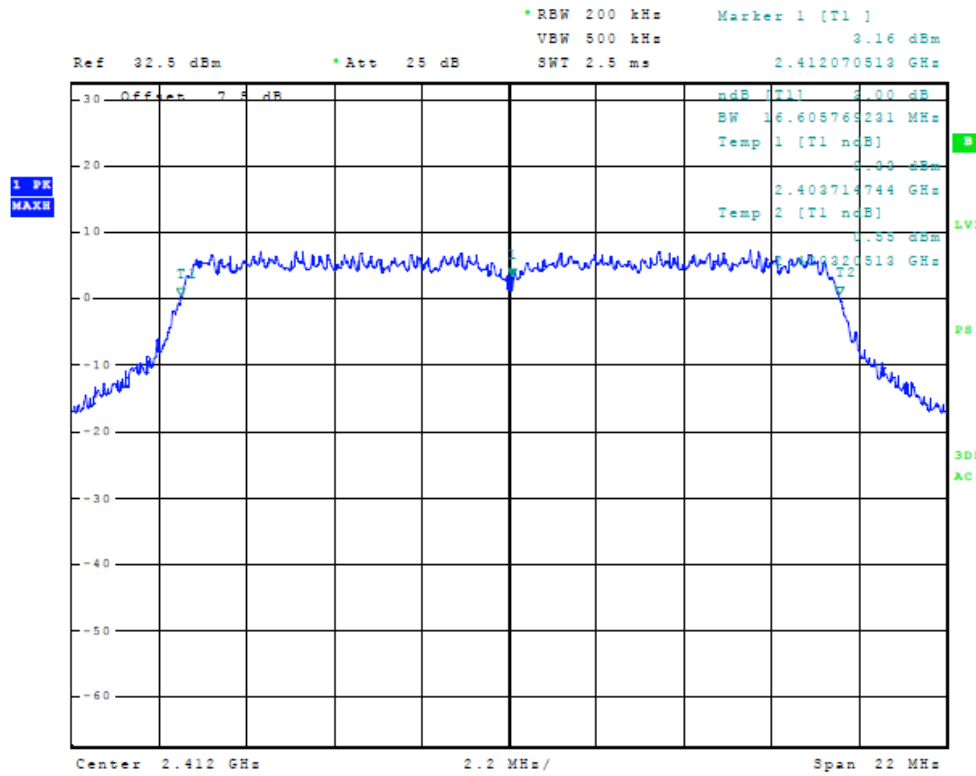


Figure 16 Plot of 6dB Band width (20 MHz Mode, 2412 MHz)

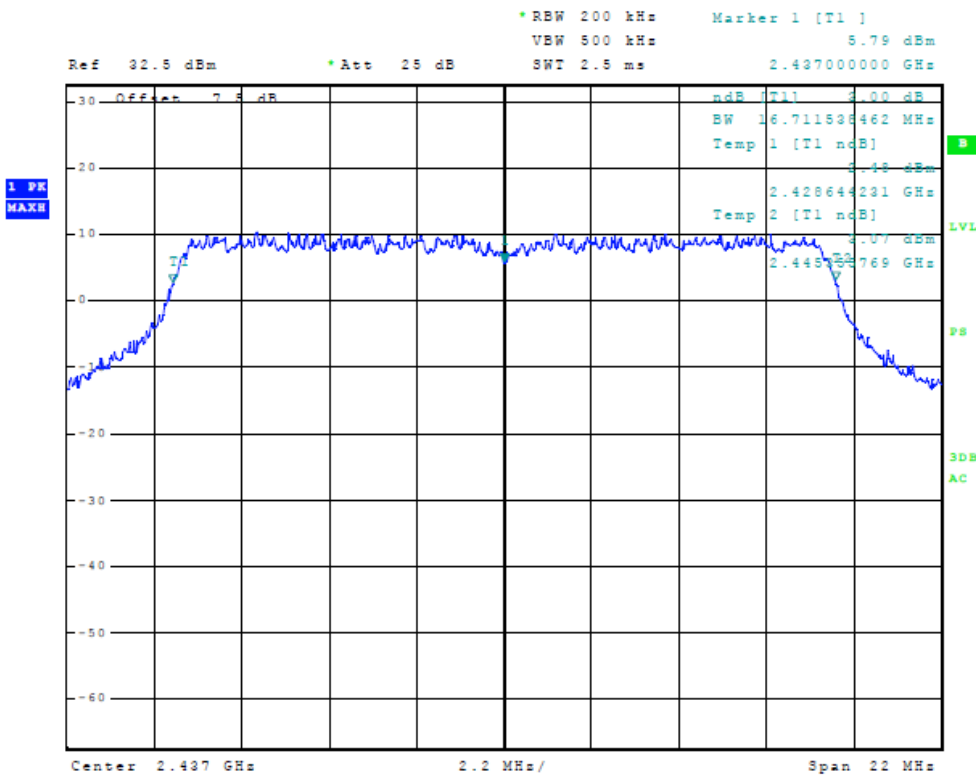


Figure 17 Plot of 6dB Band width (20 MHz Mode, 2437 MHz)

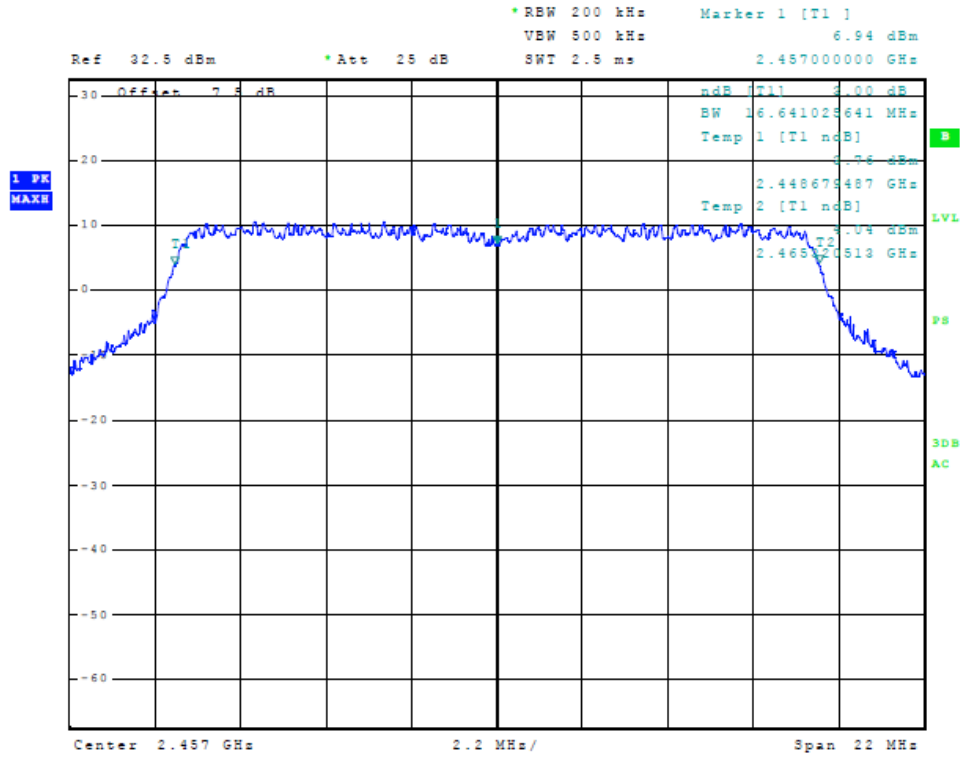


Figure 18 Plot of 6dB Band width (20 MHz Mode, 2457 MHz)

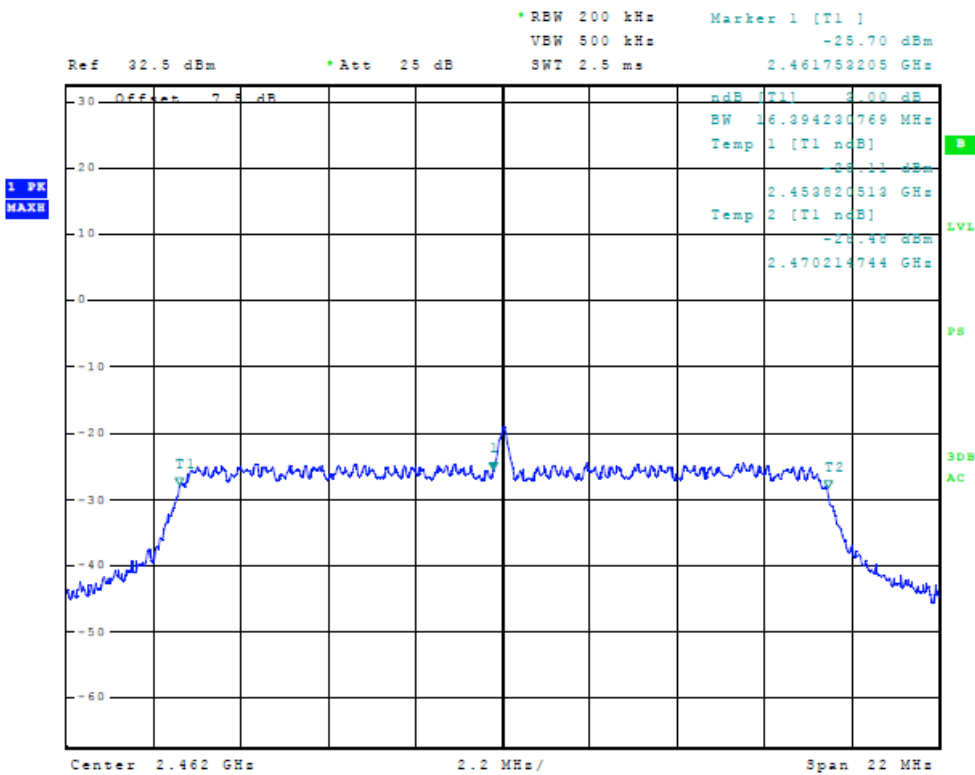


Figure 19 Plot of 6dB Band width (20 MHz Mode, 2462 MHz)

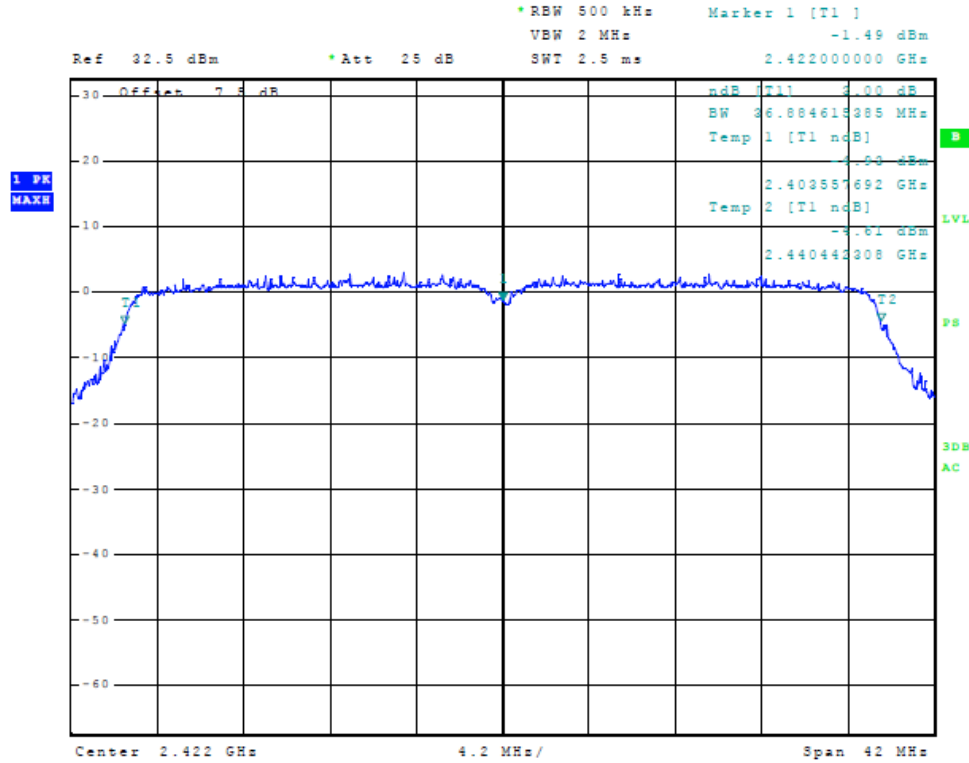


Figure 20 Plot of 6dB Band width (40 MHz Mode, 2422 MHz)

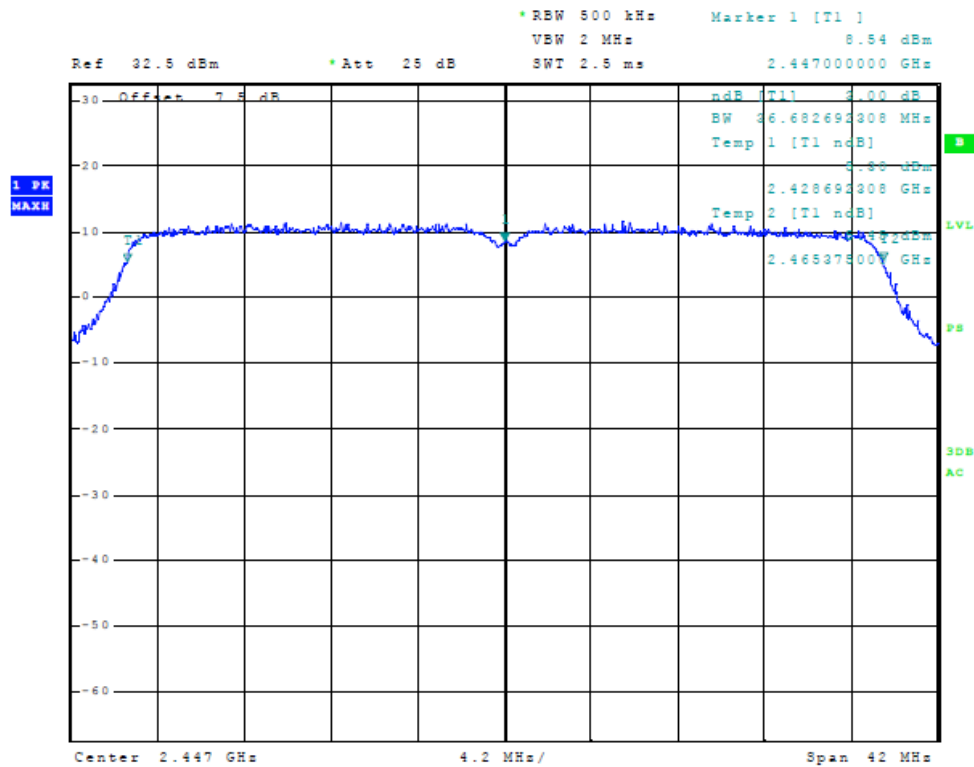


Figure 21 Plot of 6dB Band width (40 MHz Mode, 2447 MHz)

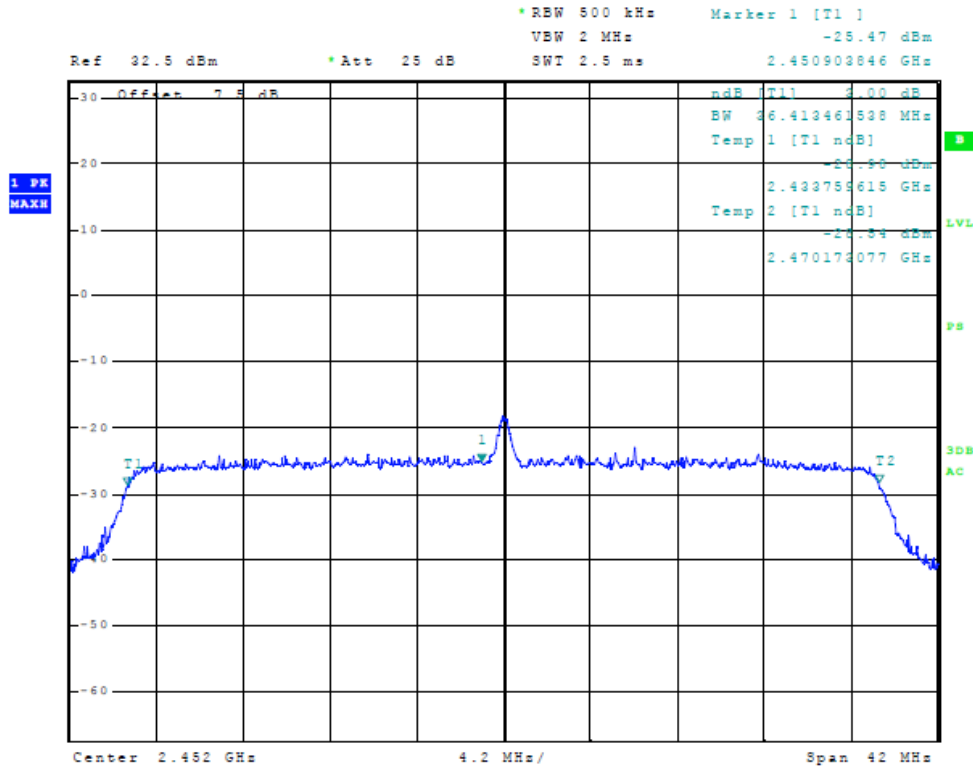


Figure 22 Plot of 6dB Band width (40 MHz Mode, 2452 MHz)

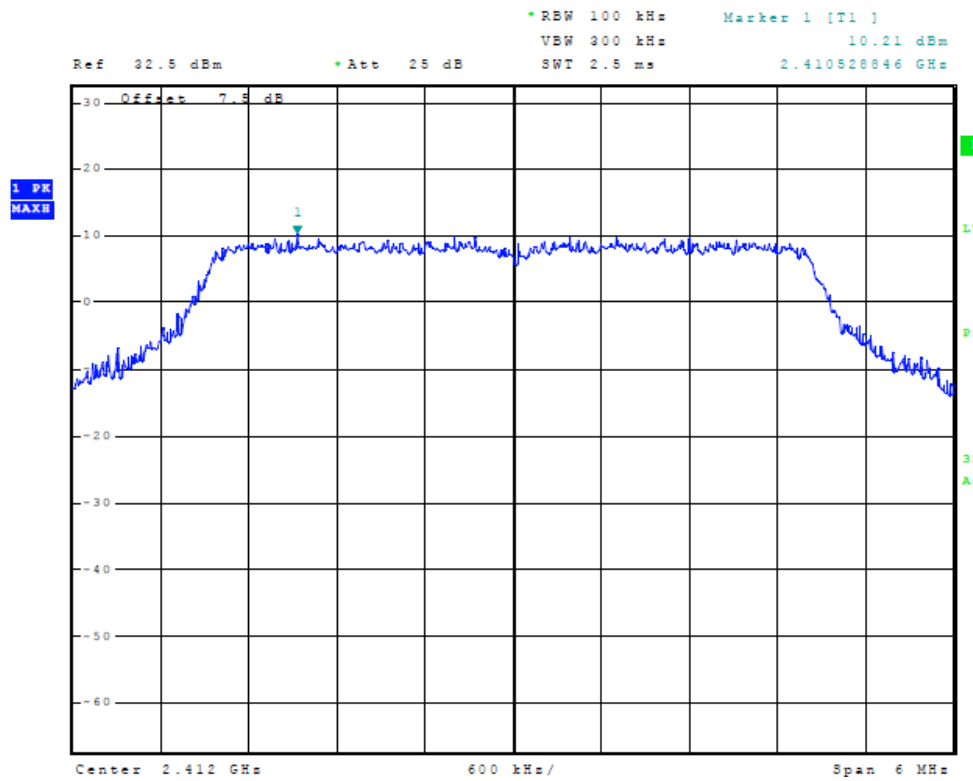


Figure 23 Plot of Power Spectral Density (5 MHz Mode, 2412 MHz)

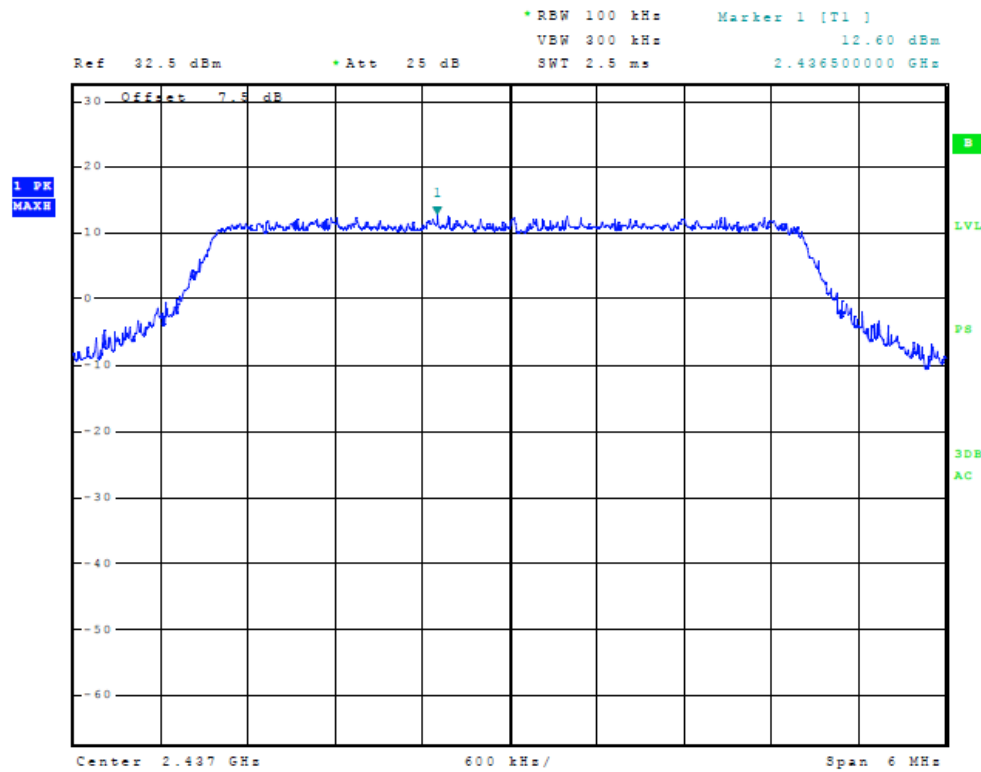


Figure 24 Plot Power Spectral Density (5 MHz Mode, 2437 MHz)

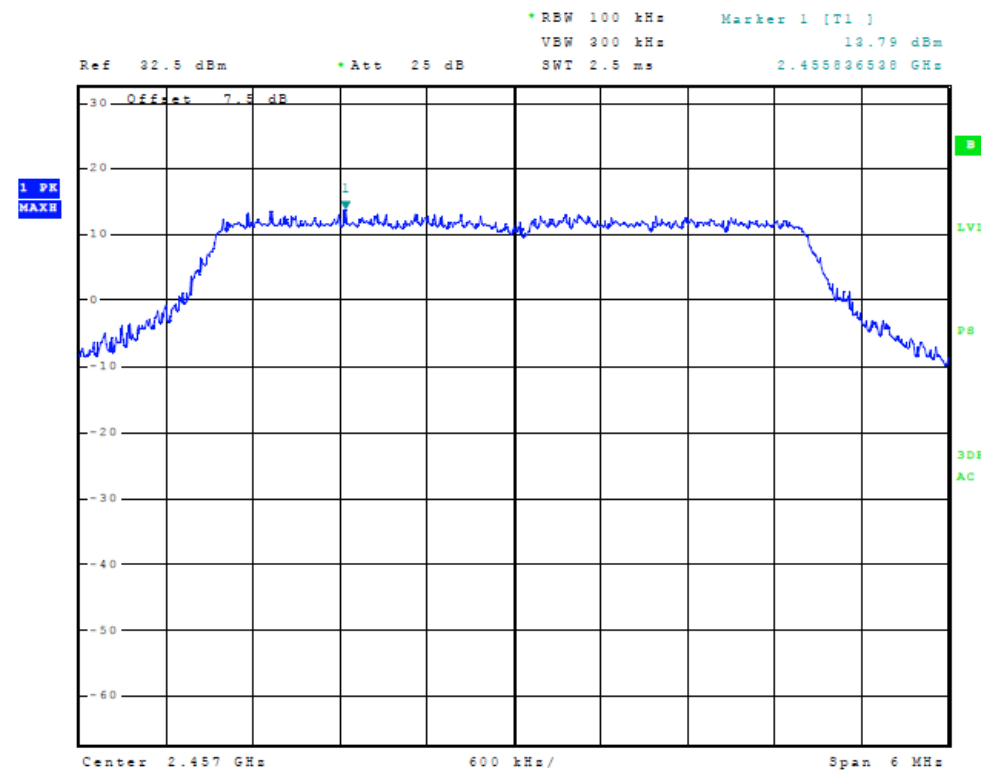


Figure 25 Plot Power Spectral Density (5 MHz Mode, 2457 MHz)

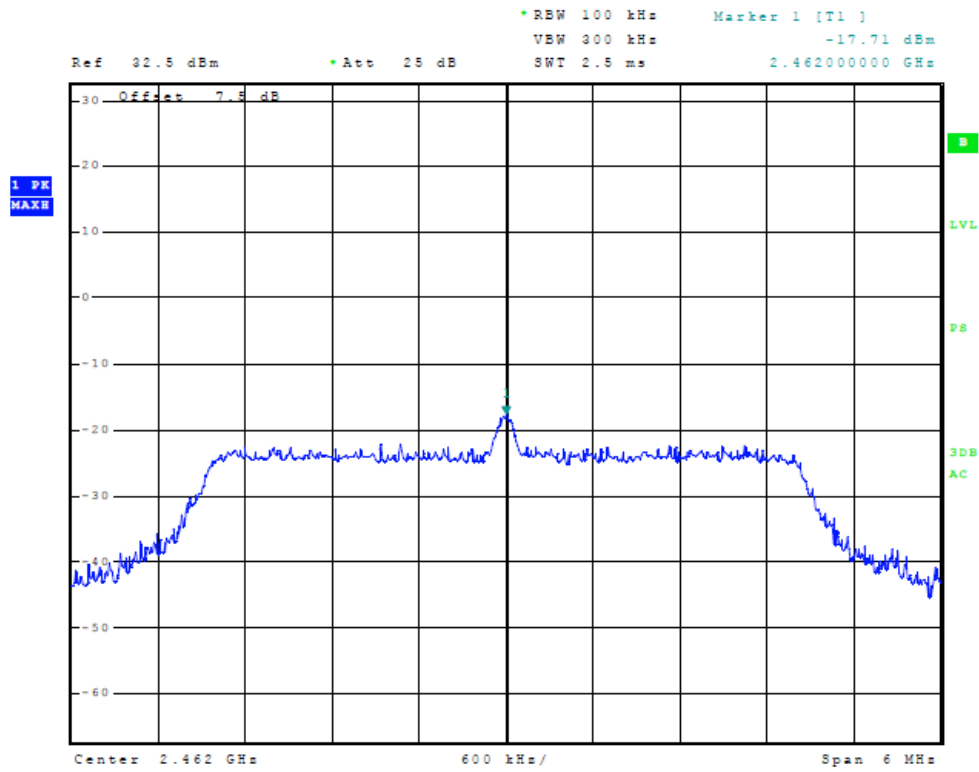


Figure 26 Plot of Power Spectral Density (5 MHz Mode, 2462 MHz)

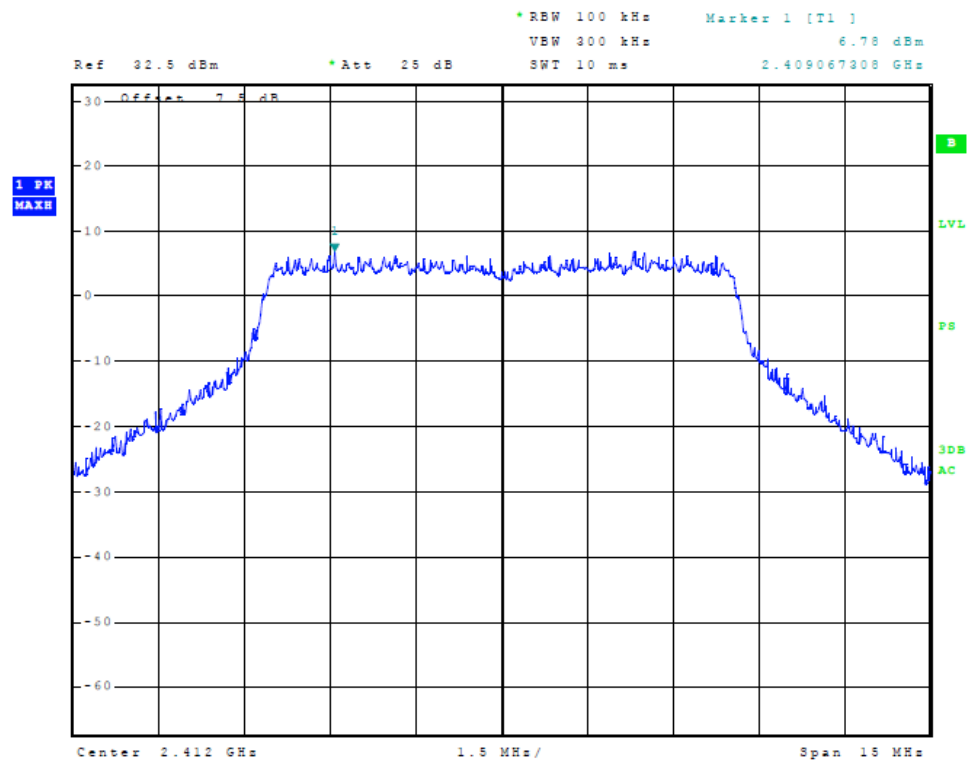


Figure 27 Plot of Power Spectral Density (10 MHz Mode, 2412 MHz)

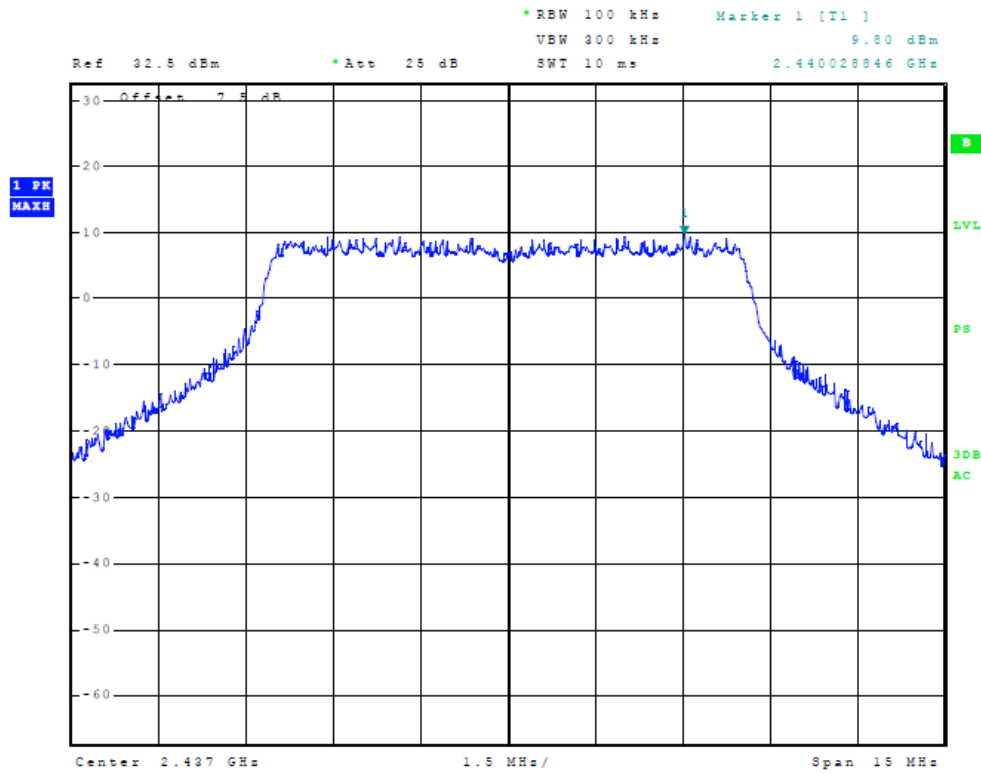


Figure 28 Plot of Power Spectral Density (10 MHz Mode, 2437 MHz)

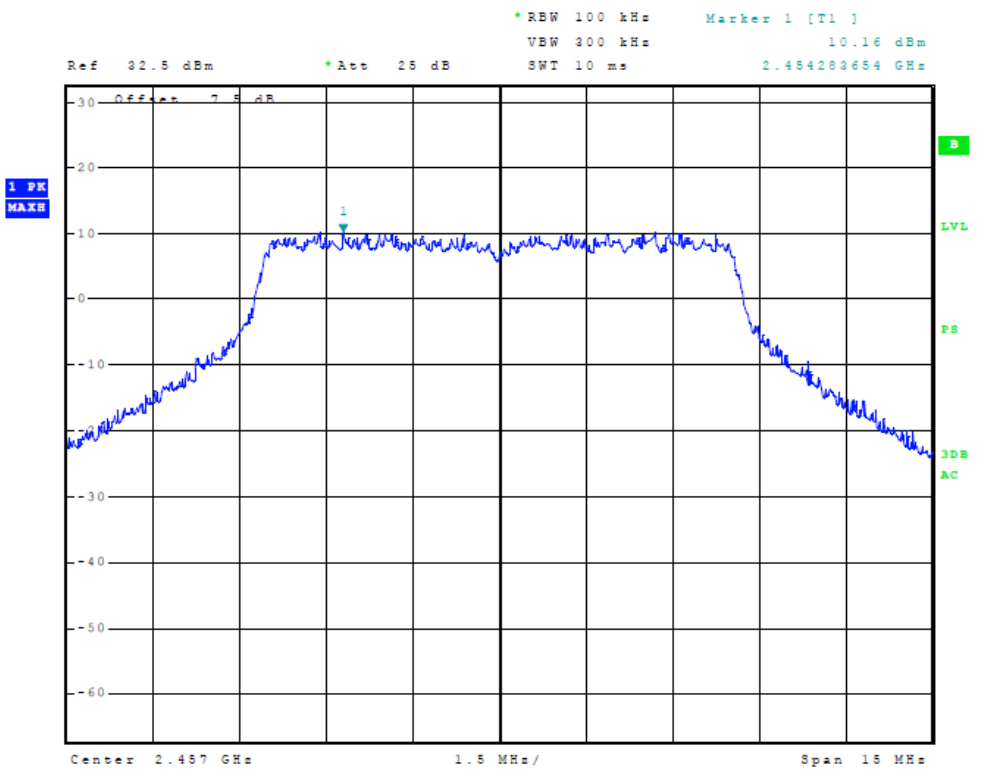


Figure 29 Plot of Power Spectral Density (10 MHz Mode, 2457 MHz)

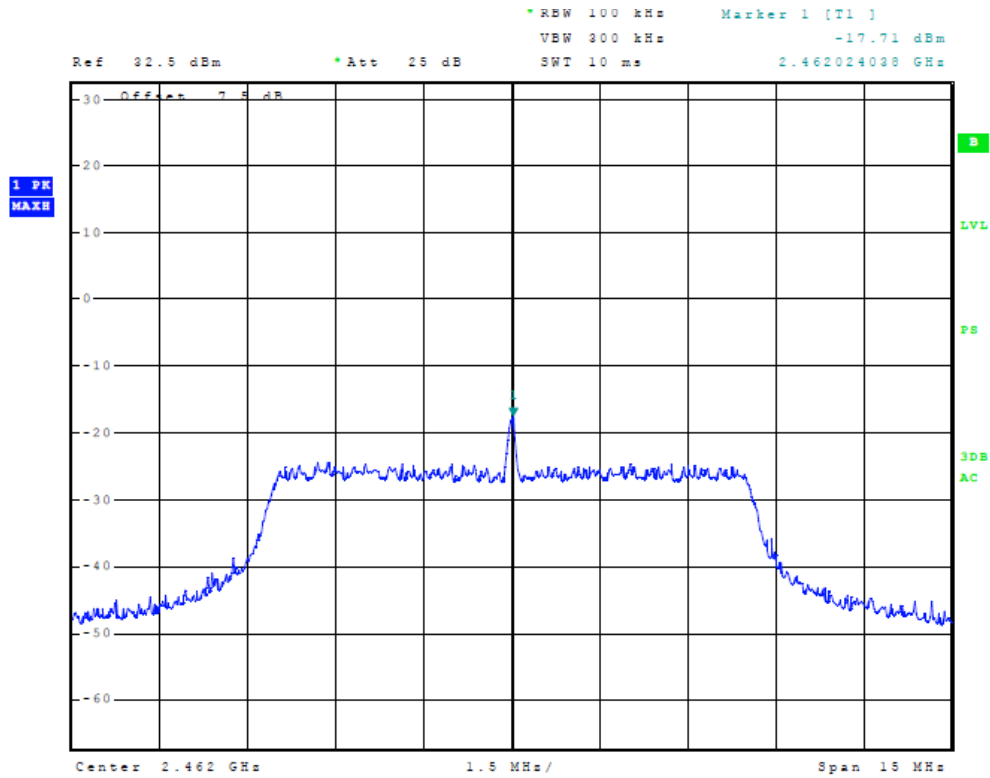


Figure 30 Plot of Power Spectral Density (10 MHz Mode, 2462 MHz)

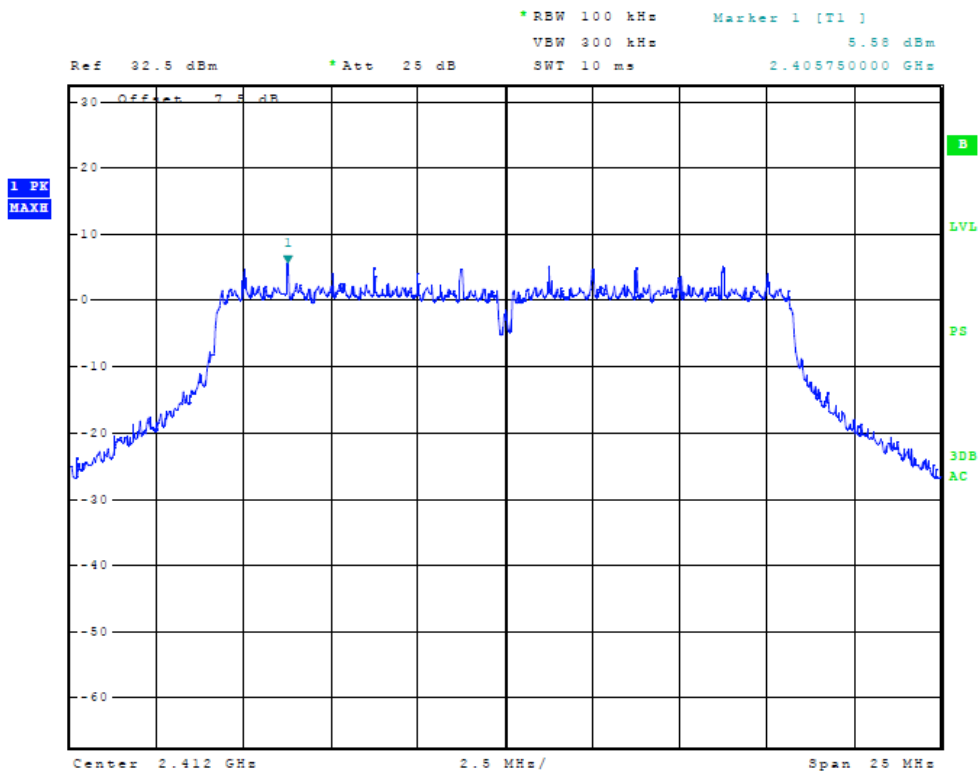


Figure 31 Plot of Power Spectral Density (20 MHz Mode, 2412 MHz)

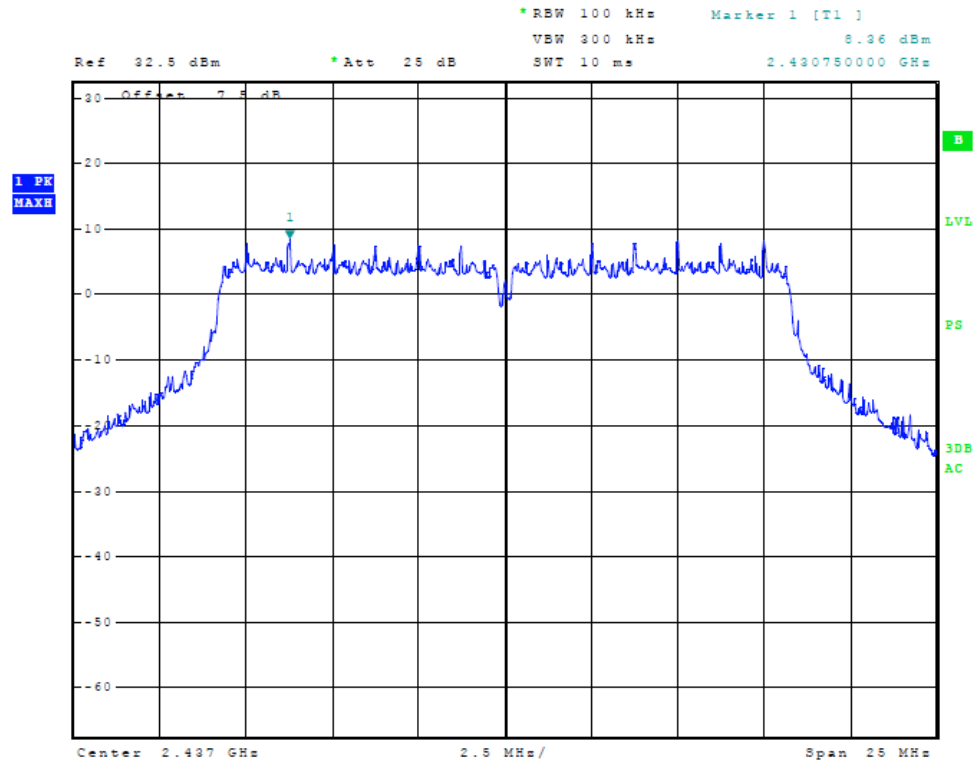


Figure 32 Plot of Power Spectral Density (20 MHz Mode, 2437 MHz)

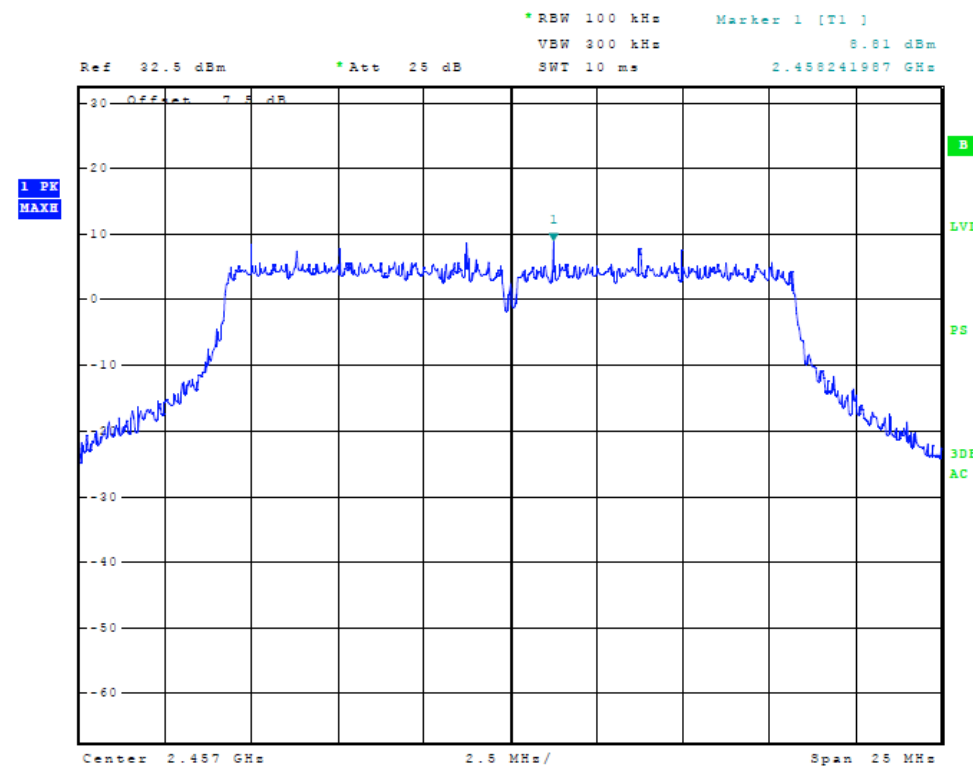


Figure 33 Plot of Power Spectral Density (20 MHz Mode, 2457 MHz)

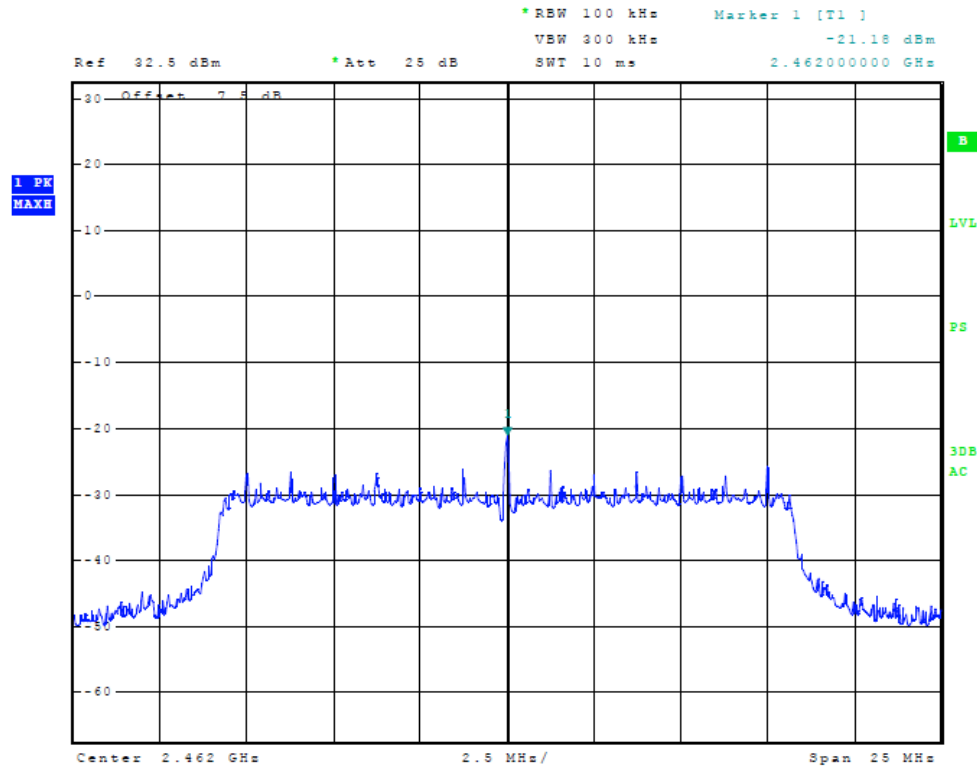


Figure 34 Plot of Power Spectral Density (20 MHz Mode, 2462 MHz)

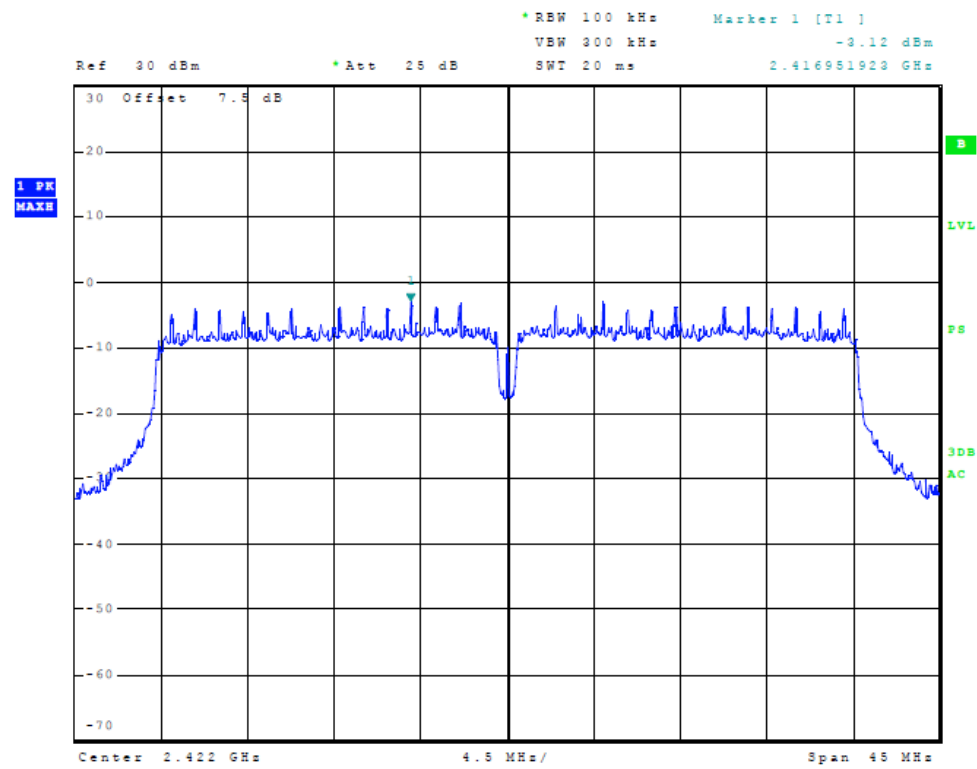


Figure 35 Plot of Power Spectral Density (40 MHz Mode, 2422 MHz)

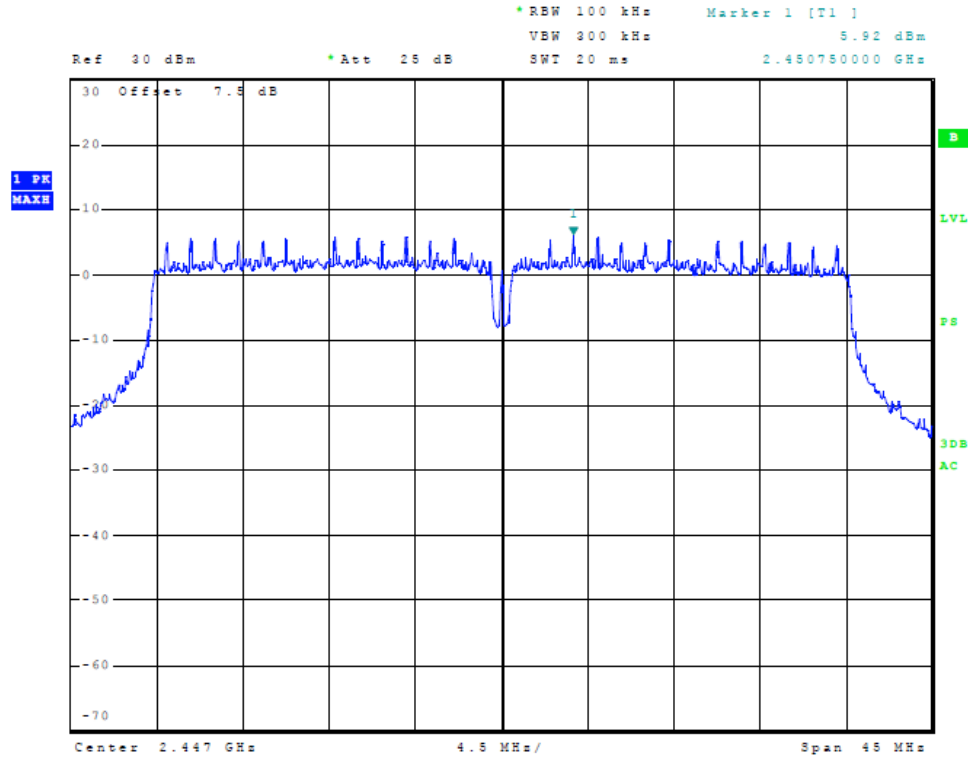


Figure 36 Plot of Power Spectral Density (40 MHz Mode, 2447 MHz)

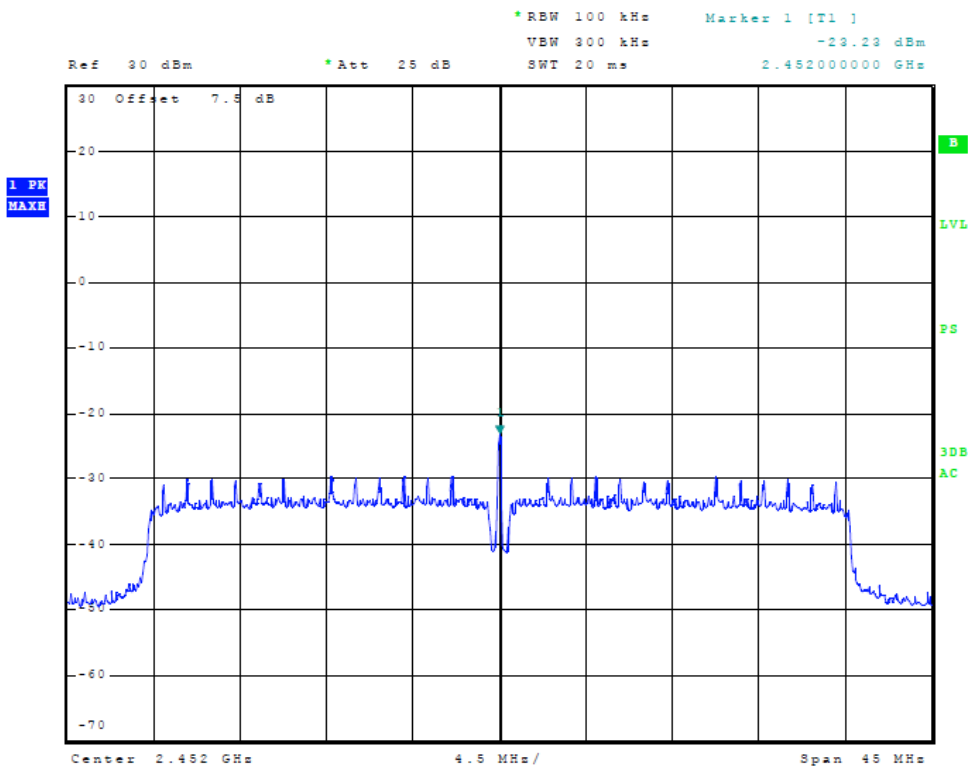


Figure 37 Plot of Power Spectral Density (40 MHz Mode, 2452 MHz)

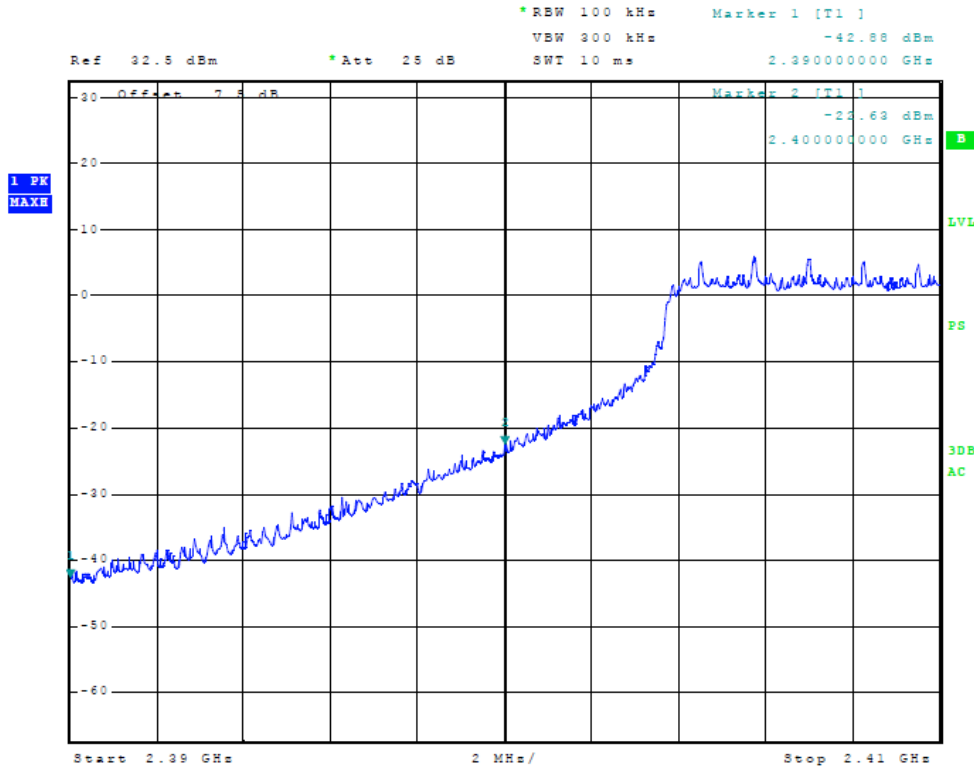


Figure 38 Plot of Lower Band Edge

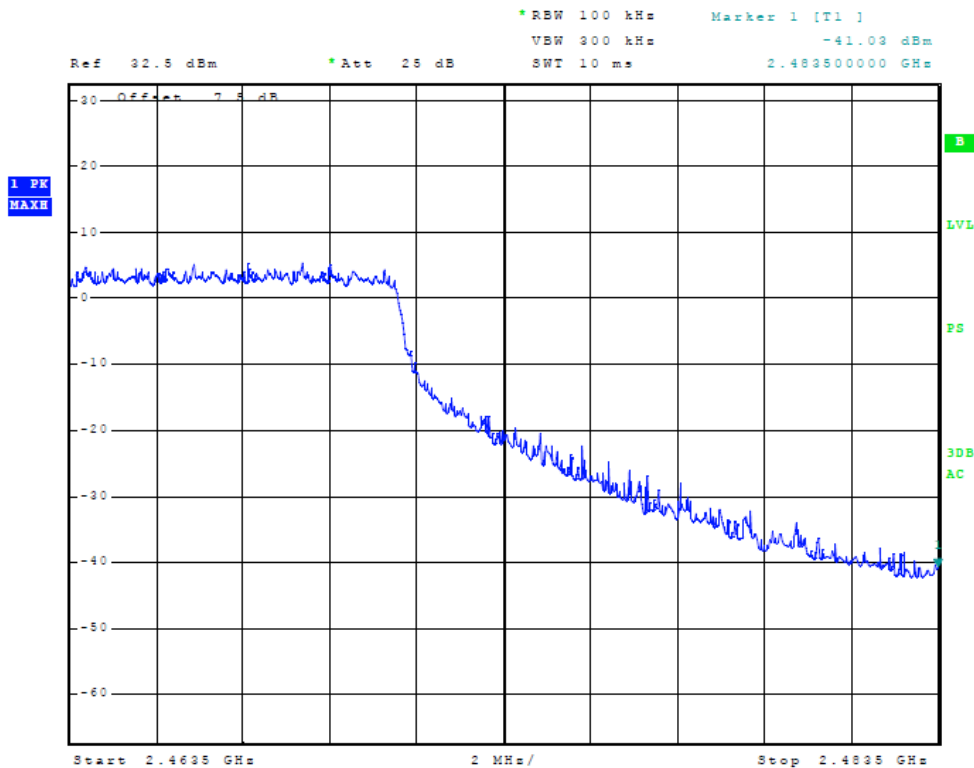


Figure 39 Plot of Upper Band Edge

Transmitter Antenna Conducted Emissions Data

The antenna conducted output power, power spectral density, and 6-dB bandwidth were measured while operating in lowest, middle and highest available channel width modes. The data reported below represents the worst-case operational conditions.

Frequency MHz	Antenna Conducted Output Power dBm	Occupied Bandwidth kHz	Power Spectral Density dBm
5MHz Mode			
2412.0	28.42	4,192.3	-8.45
2437.0	29.96	4,173.1	-5.43
2457.0	29.97	4,163.4	-1.44
2462.0	23.55	4,134.6	-5.07
10 MHz Mode			
2412.0	28.00	8,365.4	-5.02
2437.0	30.00	8,326.9	-2.63
2457.0	29.99	8,326.9	-1.44
2462.0	19.53	8,211.5	-17.61
20 MHz Mode			
2412.0	25.80	16,605.8	-9.65
2437.0	29.16	16,711.5	-6.68
2457.0	29.45	16,641.0	-6.36
2462.0	23.55	16,394.2	-21.28
40 MHz Mode			
2422.0	20.71	36,884.6	-18.36
2437.0	29.33	36,750.0	-9.31
2452.0	-5.51	36,413.5	-37.46

Transmitter Radiated Emissions Data

Transmitter Radiated Emission (15 dBi Omni WLO-2450-15)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2412.0	--	--	--	--	--
4824.0	48.7	36.0	49.3	37.4	54.0
7236.0	45.7	31.8	44.4	31.7	54.0
9648.0	51.0	37.5	51.2	37.5	54.0
12060.0	47.6	34.8	47.9	34.9	54.0
14472.0	49.8	37.5	49.4	37.2	54.0
16884.0	48.7	36.3	48.7	36.4	54.0
2437.0	--	--	--	--	--
4874.0	48.2	35.6	48.6	35.6	54.0
7311.0	41.8	29.0	41.3	28.9	54.0
9748.0	48.8	36.1	48.8	36.2	54.0
12185.0	45.9	33.6	46.6	34.1	54.0
14622.0	48.8	36.5	49.4	36.8	54.0
17059.0	49.5	37.3	49.4	37.3	54.0
2462.0	--	--	--	--	--
4924.0	47.0	34.7	47.5	34.7	54.0
7386.0	41.5	29.0	44.2	31.3	54.0
9848.0	49.2	35.9	48.2	36.1	54.0
12310.0	46.5	33.9	47.2	34.4	54.0
14772.0	50.4	38.2	51.0	38.4	54.0
17234.0	51.2	38.5	50.7	38.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Transmitter Radiated Emission (13 dBi Omni HP, ODH 24-13)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2412.0	--	--	--	--	--
4824.0	46.6	33.9	45.4	33.2	54.0
7236.0	46.1	32.4	44.6	32.4	54.0
9648.0	47.7	35.1	47.1	35.1	54.0
12060.0	46.0	33.4	46.3	33.3	54.0
14472.0	49.6	37.2	50.2	36.9	54.0
16884.0	47.6	35.3	47.6	35.3	54.0
2437.0	--	--	--	--	--
4874.0	45.6	33.0	45.8	33.1	54.0
7311.0	43.6	31.0	43.2	30.9	54.0
9748.0	47.2	34.4	47.1	34.4	54.0
12185.0	45.6	32.9	45.8	33.3	54.0
14622.0	49.9	37.0	49.5	37.4	54.0
17059.0	50.0	37.4	50.1	37.4	54.0
2462.0	--	--	--	--	--
4924.0	45.0	32.6	45.2	32.6	54.0
7386.0	43.0	30.9	43.1	30.9	54.0
9848.0	47.5	34.8	47.3	34.6	54.0
12310.0	46.3	33.6	45.7	32.9	54.0
14772.0	51.4	38.4	51.0	38.3	54.0
17234.0	50.8	38.6	51.1	38.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Transmitter Radiated Emission (20 dBi Panel, WLP-2450-20)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2412.0	--	--	--	--	--
4824.0	47.8	35.4	48.1	35.5	54.0
7236.0	47.8	34.9	47.9	34.9	54.0
9648.0	48.8	36.3	49.0	36.4	54.0
12060.0	47.4	34.3	46.5	34.3	54.0
14472.0	50.0	37.0	49.4	36.8	54.0
16884.0	47.9	36.0	48.2	36.0	54.0
2437.0	--	--	--	--	--
4874.0	48.2	35.1	48.0	35.1	54.0
7311.0	45.2	33.0	45.3	32.9	54.0
9748.0	47.9	35.7	48.5	35.9	54.0
12185.0	45.5	33.5	46.3	34.0	54.0
14622.0	48.7	36.5	49.4	36.9	54.0
17059.0	49.0	37.1	49.7	37.0	54.0
2462.0	--	--	--	--	--
4924.0	45.0	32.6	45.0	32.6	54.0
7386.0	43.3	31.0	43.5	30.9	54.0
9848.0	47.0	34.6	47.6	34.8	54.0
12310.0	45.3	32.9	46.3	33.7	54.0
14772.0	51.1	37.7	51.3	38.5	54.0
17234.0	51.2	38.6	51.1	38.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Transmitter Radiated Emission (17 dBi Sector, SA 24-90-17-WB)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2412.0	--	--	--	--	--
4824.0	48.5	35.9	49.5	38.2	54.0
7236.0	46.9	34.4	47.4	34.4	54.0
9648.0	49.9	37.5	50.1	37.5	54.0
12060.0	47.1	34.5	47.5	34.6	54.0
14472.0	47.9	35.6	48.3	36.0	54.0
16884.0	47.7	35.8	47.9	35.7	54.0
2437.0	--	--	--	--	--
4874.0	48.6	35.4	47.6	35.5	54.0
7311.0	44.6	32.2	45.1	32.3	54.0
9748.0	49.1	36.1	48.0	35.9	54.0
12185.0	47.0	34.2	45.8	33.6	54.0
14622.0	49.5	36.9	49.4	36.6	54.0
17059.0	49.4	36.9	49.9	36.9	54.0
2462.0	--	--	--	--	--
4924.0	48.0	34.7	47.2	34.7	54.0
7386.0	41.6	28.7	41.5	28.7	54.0
9848.0	48.5	36.0	49.9	35.9	54.0
12310.0	48.1	34.6	47.1	33.9	54.0
14772.0	50.8	38.3	50.5	38.3	54.0
17234.0	51.0	38.7	51.4	38.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Transmitter Radiated Emission (24 dBi Dish, DC 24-HD-PFIP)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2412.0	--	--	--	--	--
4824.0	45.6	33.1	54.3	45.0	54.0
7236.0	45.5	32.3	44.3	32.1	54.0
9648.0	47.6	34.5	48.1	34.6	54.0
12060.0	44.5	32.1	44.9	32.5	54.0
14472.0	49.9	37.1	49.8	37.3	54.0
16884.0	49.6	36.8	49.0	36.8	54.0
2437.0	--	--	--	--	--
4874.0	46.7	33.1	46.0	33.3	54.0
7311.0	43.6	31.4	43.9	31.5	54.0
9748.0	46.8	34.3	46.5	34.1	54.0
12185.0	45.6	33.2	45.6	32.8	54.0
14622.0	49.8	37.3	49.8	37.0	54.0
17059.0	49.8	37.5	50.4	37.6	54.0
2462.0	--	--	--	--	--
4924.0	45.2	31.9	644.5	31.8	54.0
7386.0	43.2	30.4	43.1	30.5	54.0
9848.0	47.1	34.5	46.9	34.4	54.0
12310.0	46.4	33.5	45.6	33.3	54.0
14772.0	50.8	38.5	50.7	38.4	54.0
17234.0	50.8	38.6	50.9	38.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.



Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated antenna conducted output power of 1000 milliwatt. The EUT demonstrated a minimum margin of -9.0 dB below the harmonic emissions requirements. The EUT demonstrated compliance with the emissions requirements for CFR47 Part 15.247 Intentional Radiators. There were no other significantly measurable emissions in restricted bands than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. The EUT demonstrated compliance with specifications of 15.247. There are no deviations or exceptions to the requirements.

Statement of Modifications and Deviations

No modifications to the EUT were required for the design to demonstrate compliance with the CFR47 Part 15C emissions requirements. There were no deviations to the specifications.



NVLAP Lab Code 200087-0

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

Annex A Measurement Uncertainty Calculations

Radiated Emissions Measurement Uncertainty Calculation

Measurement of vertically polarized radiated field strength over the frequency range 30 MHz to 1 GHz on an open area test site at 3m and 10m includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Antenna factor calibration	normal (k = 2)	±0.58
Cable loss calibration	normal (k = 2)	±0.2
Receiver specification	rectangular	±1.0
Antenna directivity	rectangular	±0.1
Antenna factor variation with height	rectangular	±2.0
Antenna factor frequency interpolation	rectangular	±0.1
Measurement distance variation	rectangular	±0.2
Site Imperfections	rectangular	±1.5
Combined standard uncertainty $u_c(y)$ is		

$$U_c(y) = \pm \sqrt{\left[\frac{1.0}{2}\right]^2 + \left[\frac{0.2}{2}\right]^2 + \left[\frac{1.0^2 + 0.1^2 + 2.0^2 + 0.1^2 + 0.2^2 + 1.5^2}{3}\right]}$$

$$U_c(y) = \pm 1.6 \text{ dB}$$

It is probable that $u_c(y) / s(q_k) > 3$, where $s(q_k)$ is estimated standard deviation from a sample of n readings unless the repeatability of the EUT is particularly poor, and a coverage factor of $k = 2$ will ensure that the level of confidence will be approximately 95%, therefore:

$$s(q_k) = \sqrt{\frac{1}{(n-1)} \sum_{k=1}^n (q_k - \bar{q})^2}$$

$$U = 2 U_c(y) = 2 \times \pm 1.6 \text{ dB} = \pm 3.2 \text{ dB}$$

Notes:

- 1.1 Uncertainties for the antenna and cable were estimated, based on a normal probability distribution with $k = 2$.
- 1.2 The receiver uncertainty was obtained from the manufacturer's specification for which a rectangular distribution was assumed.
- 1.3 The antenna factor uncertainty does not take account of antenna directivity.
- 1.4 The antenna factor varies with height and since the height was not always the same in use as when the antenna was calibrated an additional uncertainty is added.
- 1.5 The uncertainty in the measurement distance is relatively small but has some effect on the received signal strength. The increase in measurement distance as the antenna height is increased is an inevitable consequence of the test method and is therefore not considered a contribution to uncertainty.
- 1.6 Site imperfections are difficult to quantify but may include the following contributions:
 - Unwanted reflections from adjacent objects.
 - Ground plane imperfections: reflection coefficient, flatness, and edge effects.
 - Losses or reflections from "transparent" cabins for the EUT or site coverings.
 - Earth currents in antenna cable (mainly effect Biconical antennas).

The specified limits for the difference between measured site attenuation and the theoretical value (± 4 dB) were not included in total since the measurement of site attenuation includes uncertainty contributions already allowed for in this budget, such as antenna factor.

Conducted Measurements Uncertainty Calculation

Measurement of conducted emissions over the frequency range 9 kHz to 30 MHz includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Receiver specification	rectangular	± 1.5
LISN coupling specification	rectangular	± 1.5
Cable and input attenuator calibration	normal (k=2)	± 0.5
Combined standard uncertainty $u_c(y)$ is		

$$U_c(y) = \pm \sqrt{\left[\frac{0.5}{2}\right]^2 + \frac{1.5^2 + 1.5^2}{3}}$$

$$U_c(y) = \pm 1.2 \text{ dB}$$

As with radiated field strength uncertainty, it is probable that $u_c(y) / s(q_k) > 3$ and a coverage factor of $k = 2$ will suffice, therefore:

$$U = 2 U_c(y) = 2 \times \pm 1.2 \text{ dB} = \pm 2.4 \text{ dB}$$



Annex B Rogers Labs Test Equipment List

The test equipment used is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

List of Test Equipment	Calibration Date
Oscilloscope Scope: Tektronix 2230	2/12
Wattmeter: Bird 43 with Load Bird 8085	2/12
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/12
H/V Power Supply: Fluke Model: 408B (SN: 573)	2/12
R.F. Generator: HP 606A	2/12
R.F. Generator: HP 8614A	2/12
R.F. Generator: HP 8640B	2/12
Spectrum Analyzer: Rohde & Schwarz ESU40	2/12
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, 11520 Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	5/11
Spectrum Analyzer: HP 8591EM	5/11
Frequency Counter: Leader LDC825	2/12
Antenna: Sunol Biconilog Model: JB6	5/11
Antenna: EMCO Biconilog Model: 3143	5/11
Antenna: EMCO Log Periodic Model: 3147	10/11
Antenna: Antenna Research Biconical Model: BCD 235	10/11
Antenna: EMCO Dipole Set 3121C	2/12
Antenna: C.D. B-101	2/12
Antenna: Solar 9229-1 & 9230-1	2/12
Antenna: EMCO 6509	2/12
Antenna: Large Loop Antenna	2/12
Audio Oscillator: H.P. 201CD	2/12
R.F. Power Amp 65W Model: 470-A-1010	2/12
R.F. Power Amp 50W M185- 10-501	2/12
R.F. Preamp CPPA-102	2/12
LISN 50 μ Hy/50 ohm/0.1 μ f	10/11
LISN Compliance Eng. 240/20	2/12
LISN Fischer Custom Communications FCC-LISN-50-16-2-08	2/12
Peavey Power Amp Model: IPS 801	2/12
Power Amp A.R. Model: 10W 1010M7	2/12
Power Amp EIN Model: A301	2/12
ELGAR Model: 1751	2/12
ELGAR Model: TG 704A-3D	2/12
ESD Test Set 2010i	2/12
Fast Transient Burst Generator Model: EFT/B-101	2/12
Current Probe: Singer CP-105	2/12
Current Probe: Solar 9108-1N	2/12
Field Intensity Meter: EFM-018	2/12
KEYTEK Ecat Surge Generator	2/12
Shielded Room 5 M x 3 M x 3.0 M	



Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years' experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

Scot D. Rogers



NVLAP Lab Code 200087-0

Annex D FCC Site Registration Letter

FEDERAL COMMUNICATIONS COMMISSION

**Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046**

November 01, 2011

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace,
Louisburg, KS 66053

Attention: Scot Rogers,

Re: Measurement facility located at Louisburg
3 & 10 meter site
Date of Renewal: November 01, 2011

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Phyllis Parrish
Industry Analyst

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Mikrotikls SIA
Model: Metal 2SHPn
Test #: 120424
Test to: CFR47 (15.247)
File: Mikrotikls METL2SHPn TstRpt 120424

SN: 370A01DD0CE1
FCC ID#: TV7METL2SHPN
Date: May 30, 2012
Page 54 of 55



NVLAP Lab Code 200087-0

Annex E Industry Canada Site Registration Letter



December 28, 2011

OUR FILE: 46405-3041
Submission No: 152685

Rogers Labs Inc.
4405 West 259th Terrance
Louisburg, KS, 66053
USA

Attention: Mr. Scot D. Rogers

Dear Sir/Madame:

The Bureau has received your application for the renewal of 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (**Site# 3041A-1**). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to **exceed three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;

http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html.

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca Please reference our file and submission number above for all correspondence.

Yours sincerely,

Dalwinder Gill
For: Wireless Laboratory Manager
Certification and Engineering Bureau
3701 Carling Ave., Building 94
P.O. Box 11490, Station "H"
Ottawa, Ontario K2H 8S2
Email: dalwinder.gill@ic.gc.ca
Tel. No. (613) 998-8363
Fax. No. (613) 990-4752

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Mikrotikls SIA
Model: Metal 2SHPn
Test #: 120424
Test to: CFR47 (15.247)
File: Mikrotikls METL2SHPn TstRpt 120424

SN: 370A01DD0CE1
FCC ID#: TV7METL2SHPN
Date: May 30, 2012
Page 55 of 55