




SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Mikrotiks SIA
Applicant Address	Pernavas 46, Riga LV-1009, LATVIA
FCC ID	TV7R52HN
Manufacturer's company	Mikrotiks SIA
Manufacturer Address	Pernavas 46, Riga LV-1009, LATVIA

Product Name	WLAN 802.11a/b/g/n MiniPCI module
Brand Name	RouterBOARD
Model Name	R52Hn
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Nov. 20, 2009
Final Test Date	Dec. 07, 2009
Submission Type	Original Equipment

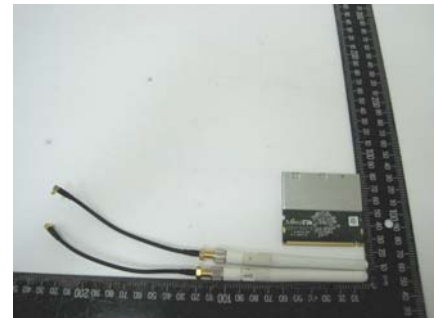

Statement

Test result included is for the 802.11n and 802.11a (5150 ~ 5350MHz / 5470 ~ 5725MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.4-2003 and 47 CFR FCC Part 15 Subpart E.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes.....	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units	8
3.8. Table for Parameters of Test Software Setting	9
3.9. Test Configurations	10
4. TEST RESULT	13
4.1. AC Power Line Conducted Emissions Measurement.....	13
4.2. 99% Occupied Bandwidth Measurement	17
4.3. Maximum Conducted Output Power Measurement.....	33
4.4. Power Spectral Density Measurement	65
4.5. Peak Excursion Measurement.....	81
4.6. Radiated Emissions Measurement	97
4.7. Band Edge Emissions Measurement	153
4.8. Frequency Stability Measurement	163
4.9. Antenna Requirements	165
5. LIST OF MEASURING EQUIPMENTS	166
6. TEST LOCATION.....	167
7. TAF CERTIFICATE OF ACCREDITATION	168
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A6
APPENDIX B. TEST PHOTOS.....	B1 ~ B6
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~ C3



History of This Test Report

Original Issue Date: Dec. 14, 2009

Report No.: FR9N1919AA

- No additional attachment.
- Additional attachment were issued as following record:


Attachment No.	Issue Date	Description



1. CERTIFICATE OF COMPLIANCE

Product Name : WLAN 802.11a/b/g/n MiniPCI module
Brand Name : RouterBOARD
Model Name : R52Hn
Applicant : Mikrotiks SIA
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 20, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Jordan Hsiao 2009.12.14' with a horizontal line underneath.

Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	12.30 dB
4.2	15.407(a)	99% Occupied Bandwidth Measurement	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.04 dB
4.4	15.407(a)	Power Spectral Density	Complies	7.80 dB
4.5	15.407(a)	Peak Excursion	Complies	6.41 dB
4.6	15.407(b)	Radiated Emissions	Complies	0.03 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.03 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	16 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (20MHz): 18.56 MHz ; MCS0 (40MHz): 36.64 MHz
Conducted Output Power	Band 1: MCS0 (20MHz): 16.03 dBm ; MCS0 (40MHz): 16.91 dBm Band 2: MCS0 (20MHz): 23.93 dBm ; MCS0 (40MHz): 23.83 dBm Band 3: MCS0 (20MHz): 23.87 dBm ; MCS0 (40MHz): 23.90 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	16
Channel Band Width (99%)	Band 1: 16.96 MHz ; Band 2: 17.12 MHz ; Band 3: 17.12 MHz
Conducted Output Power	Band 1: 16.96 dBm ; Band 2: 23.94 dBm ; Band 3: 23.87 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
IEEE 802.11a	X	X	V	X
IEEE 802.11n	X	X	V	V

IEEE 802.11n spec

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

N/A


3.3. Table for Filed Antenna

<For 5GHz Band>:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
A (J4)	LCU	F1B-204406-52	Dipole Antenna	Reversed-SMA	2.50	TX/RX
B (J5)	LCU	F1B-204406-52	Dipole Antenna	Reversed-SMA	2.50	TX/RX

Note: The EUT has two Antennas.

Both Antenna A and B can be used as transmitting/receiving antenna.

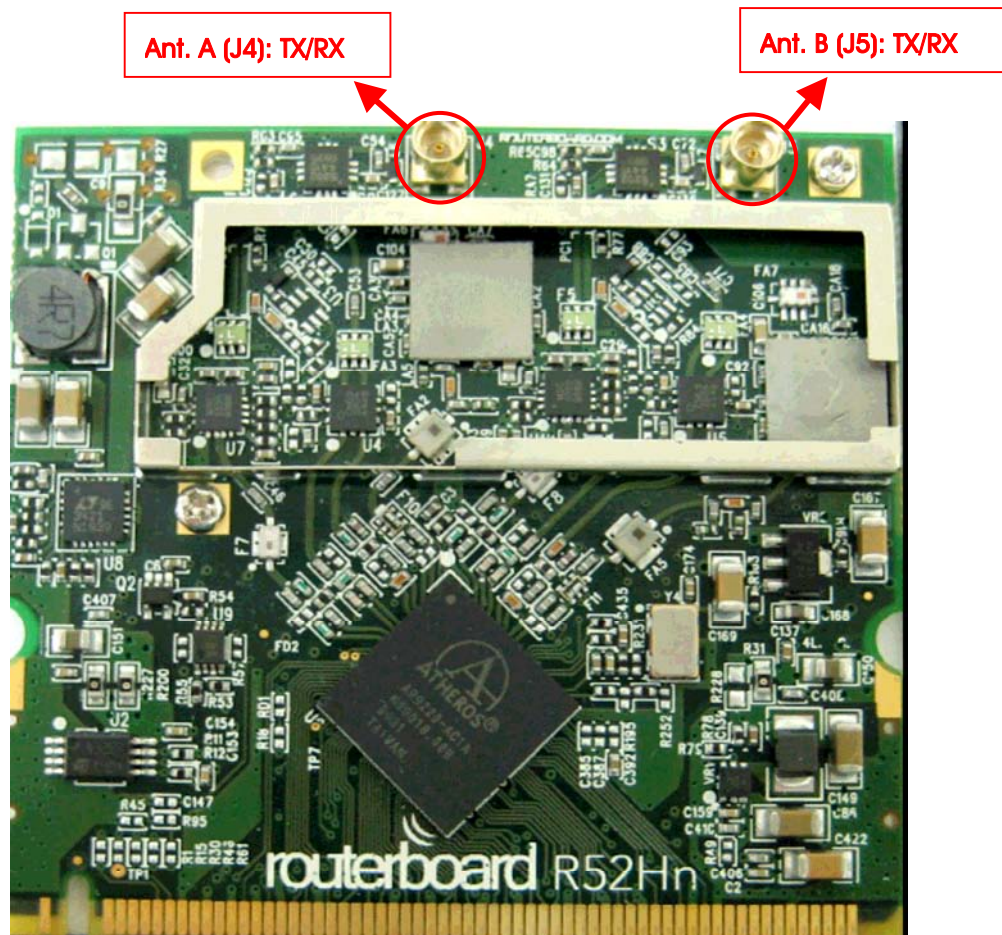

3.4. Table for Carrier Frequencies

Frequency Allocation for 802.11a

There are two bandwidth systems for 802.11n.

For both 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140.

For both 40MHz bandwidth systems, use Channel 38, 46, 54, 62, 102, 110, 134.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
5470~5725 MHz Band 3	100	5500 MHz	116	5580 MHz
	102	5510MHz	132	5660 MHz
	104	5520 MHz	134	5670 MHz
	108	5540 MHz	136	5680 MHz
	110	5550 MHz	140	5700 MHz
	112	5560 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		Auto	-	A+B
Max. Conducted Output Power	MCS0/20MHz	Band 1~2	13Mbps	36/40/48/52/60/64	A / B / A+B
		Band 3	13Mbps	100/116/140	A / B / A+B
	MCS0/40MHz	Band 1~2	27Mbps	38/46/54/62	A / B / A+B
		Band 3	27Mbps	102/110/134	A / B / A+B
	11a/BPSK	Band 1~2	13Mbps	36/40/48/52/60/64	A / B / A+B
		Band 3	13Mbps	100/116/140	A / B / A+B
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Power Spectral Density Peak Excursion	MCS0/20MHz	Band 1~2	13Mbps	36/40/48/52/60/64	A+B
		Band 3	13Mbps	100/116/140	A+B
	MCS0/40MHz	Band 1~2	27Mbps	38/46/54/62	A+B
		Band 3	27Mbps	102/110/134	A+B
	11a/BPSK	Band 1~2	13Mbps	36/40/48/52/60/64	A+B
		Band 3	13Mbps	100/116/140	A+B
Radiated Emission Below 1GHz	Normal Link		Auto	-	A+B
Radiated Emission Above 1GHz	MCS0/20MHz	Band 1~2	13Mbps	36/40/48/52/60/64	A+B
		Band 3	13Mbps	100/116/140	A+B
	MCS0/40MHz	Band 1~2	27Mbps	38/46/54/62	A+B
		Band 3	27Mbps	102/110/134	A+B
	11a/BPSK	Band 1~2	13Mbps	36/40/48/52/60/64	A+B
		Band 3	13Mbps	100/116/140	A+B
Band Edge Emission	MCS0/20MHz	Band 1~2	13Mbps	36/40/60/64	A+B
		Band 3	13Mbps	100/140	A+B
	MCS0/40MHz	Band 1~2	27Mbps	38/46/54/62	A+B
		Band 3	27Mbps	102/110/134	A+B
	11a/BPSK	Band 1~2	13Mbps	36/40/60/64	A+B
		Band 3	13Mbps	100/140	A+B
Frequency Stability	Un-modulation		-	60	N/A

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	480872	IC 4086	-
CO04-HY	Conduction	Hwa Ya	480872	IC 4086	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D400	E2K24GBRL
Mouse	iCooky	AMS0706W	DoC
Wireless AP	Planex	GW-AP54SGX	N/A
Modem	ACEEX	DM1414	IFAXDM1414
Printer	EPSON	LQ-300+	DoC
POWER SUPPLY	GW	GPC-6030D	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	ART Revision 0.9 BUILD #7								
Frequency	5180 MHz	5200 MHz	5240 MHz	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
IEEE 802.11n MCS0 20MHz	6	6.5	6.5	10.5	11.5	11.5	13	11.5	11.5

Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	ART Revision 0.9 BUILD #7								
Frequency	5190 MHz	5230 MHz	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz		
IEEE 802.11n MCS0 40MHz	6	6	11.5	10	9.5	11	11.5		

Power Parameters of IEEE 802.11a

Test Software Version	ART Revision 0.9 BUILD #7								
Frequency	5180 MHz	5200 MHz	5240 MHz	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
IEEE 802.11a	6.5	7	6.5	11	12	11.5	11	11.5	11.5



During the test, the following programs under WIN XP were executed:

Executed "ART Revision 0.9 BUILD #7" to control the EUT continuously transmit RF signal.


3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration


Test Configuration: 9kHz~1GHz

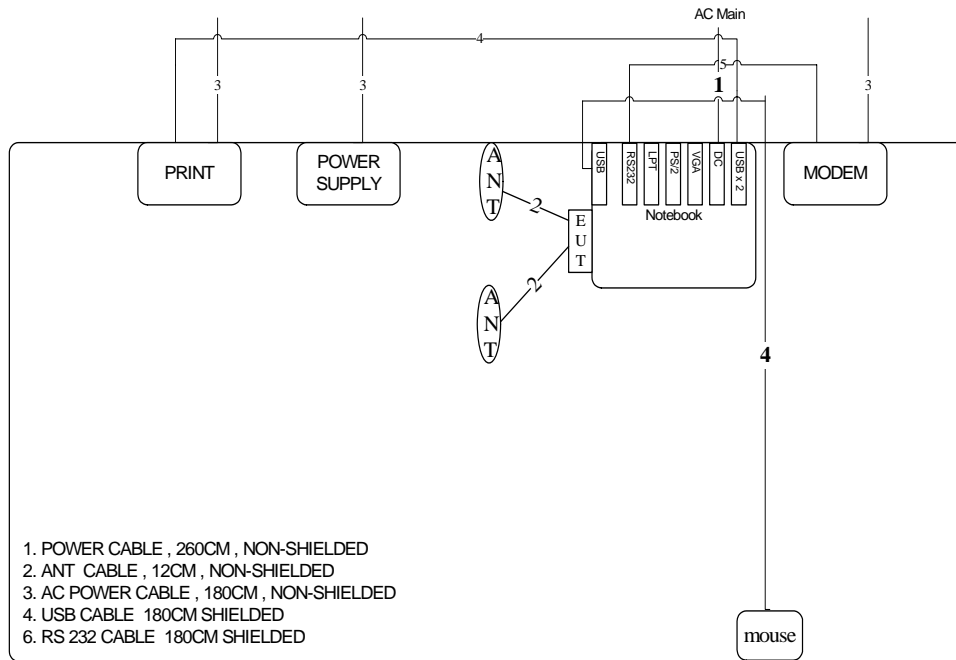

Test Configuration: above 1GHz

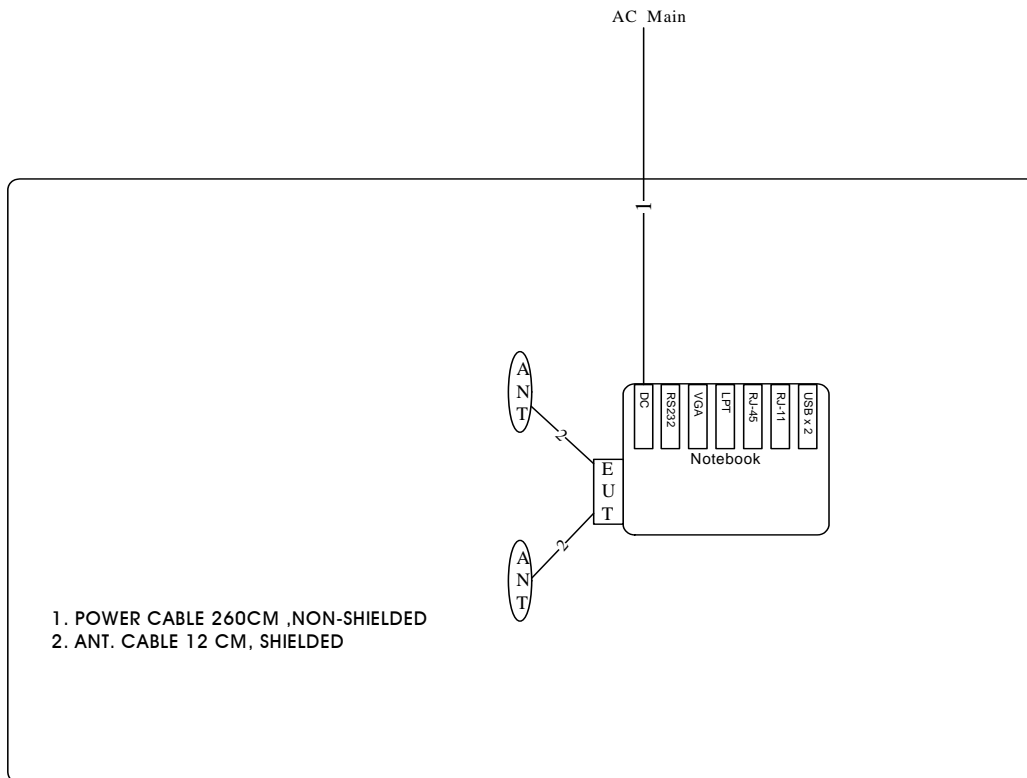

3.9.2. AC Power Line Conduction Emissions Test Configuration

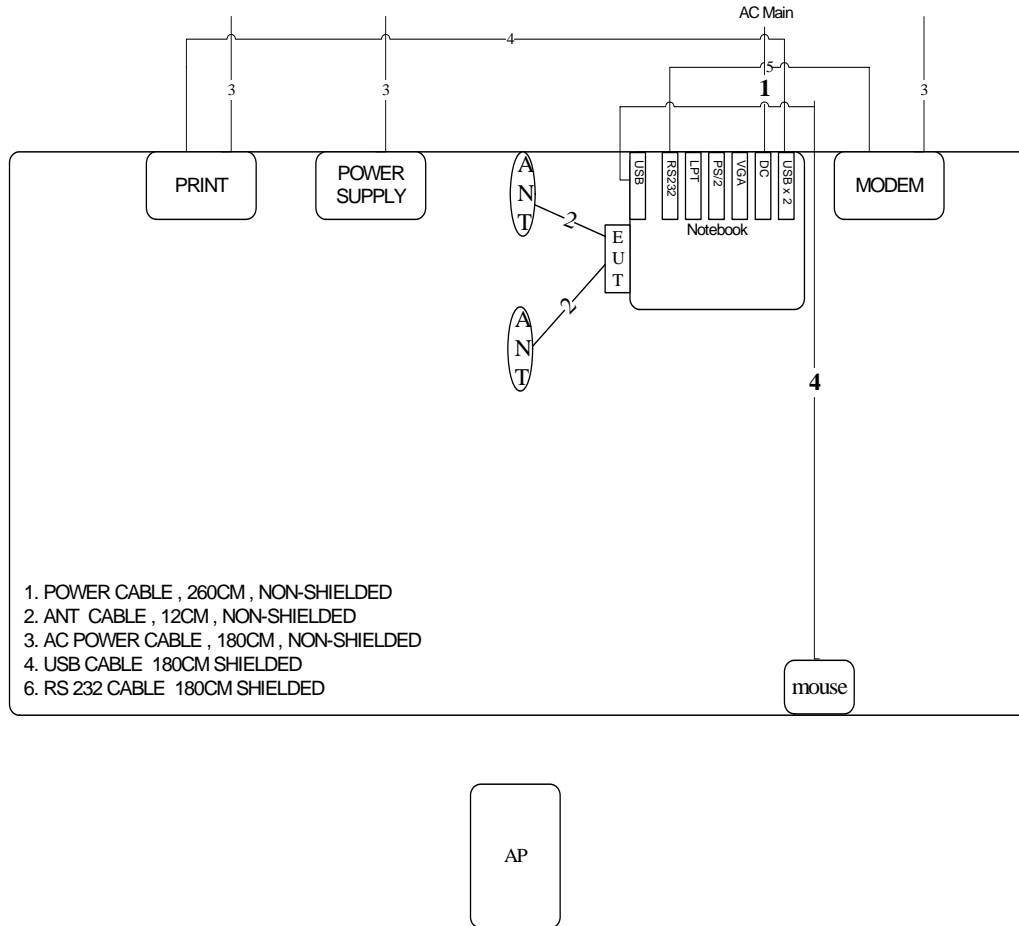

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

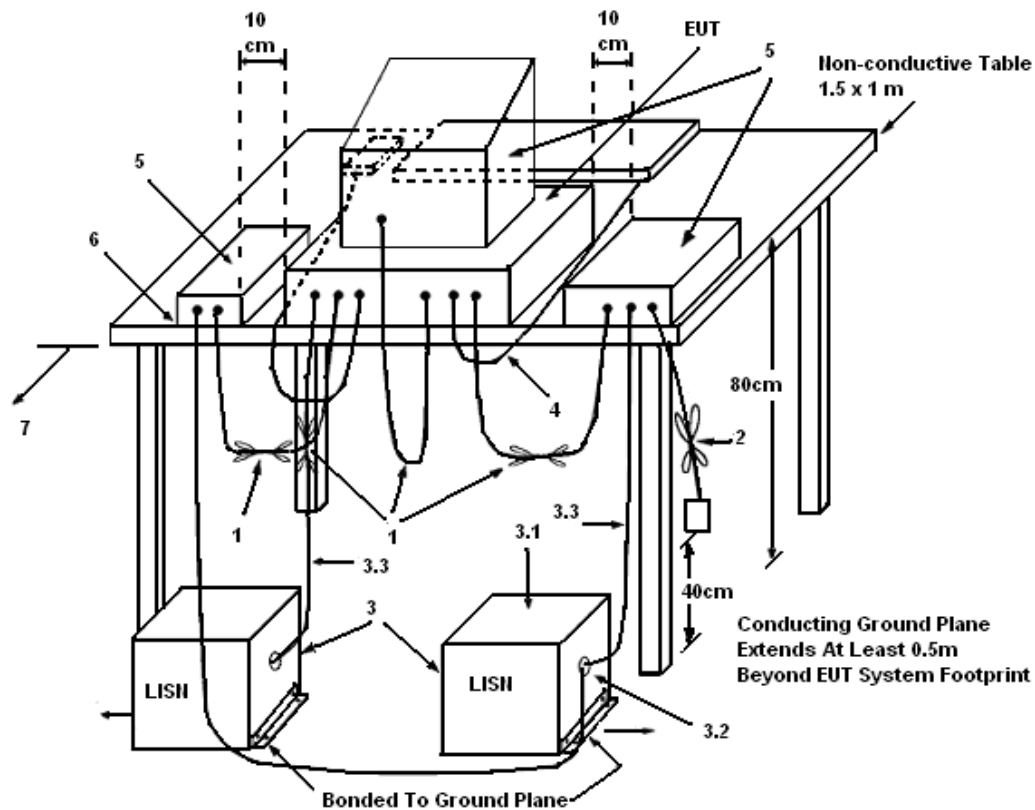

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	54%
Test Engineer	Rex Chiu	Phase	Line
Configuration	Normal Link		

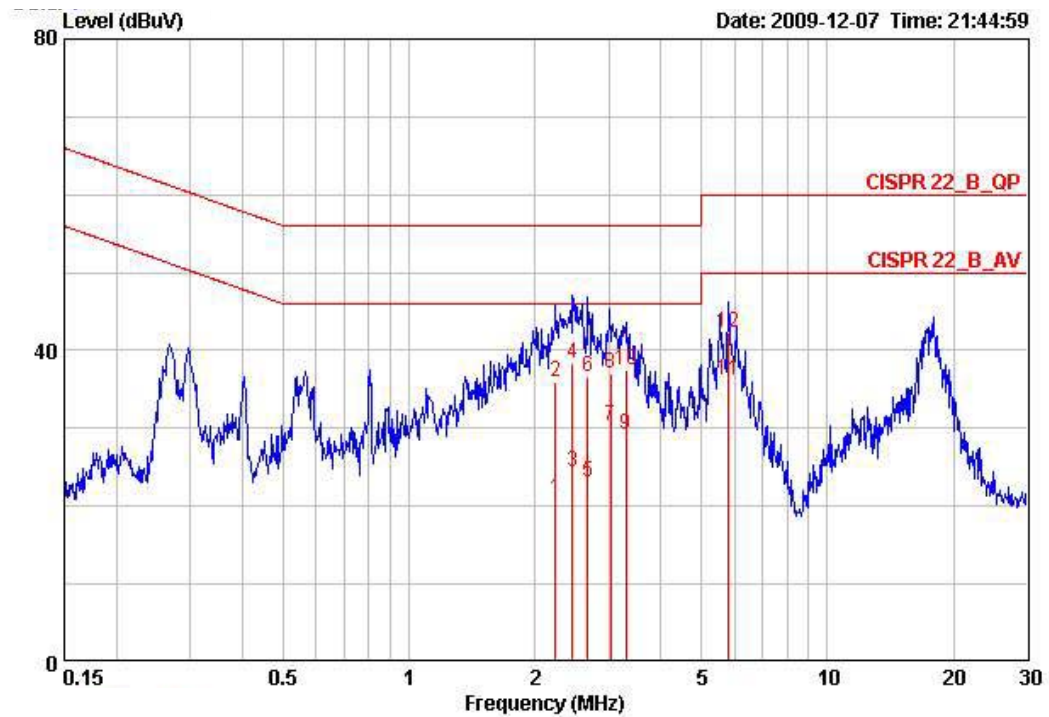

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	2.237	20.96	-25.04	46.00	20.70	0.06	0.20	AVERAGE
2	2.237	35.93	-20.07	56.00	35.67	0.06	0.20	QP
3	2.461	24.33	-21.67	46.00	24.06	0.07	0.20	AVERAGE
4	2.461	38.45	-17.55	56.00	38.18	0.07	0.20	QP
5	2.678	23.18	-22.82	46.00	22.91	0.07	0.20	AVERAGE
6	2.678	36.67	-19.33	56.00	36.40	0.07	0.20	QP
7	3.031	30.30	-15.70	46.00	30.01	0.08	0.21	AVERAGE
8	3.031	37.14	-18.86	56.00	36.85	0.08	0.21	QP
9	3.293	29.24	-16.76	46.00	28.89	0.09	0.26	AVERAGE
10	3.293	37.45	-18.55	56.00	37.10	0.09	0.26	QP
11	5.787	36.11	-13.89	50.00	35.61	0.20	0.30	AVERAGE
12	5.787	42.38	-17.62	60.00	41.88	0.20	0.30	QP

Temperature	23°C	Humidity	54%
Test Engineer	Rex Chiu	Phase	Neutral
Configuration	Normal Link		

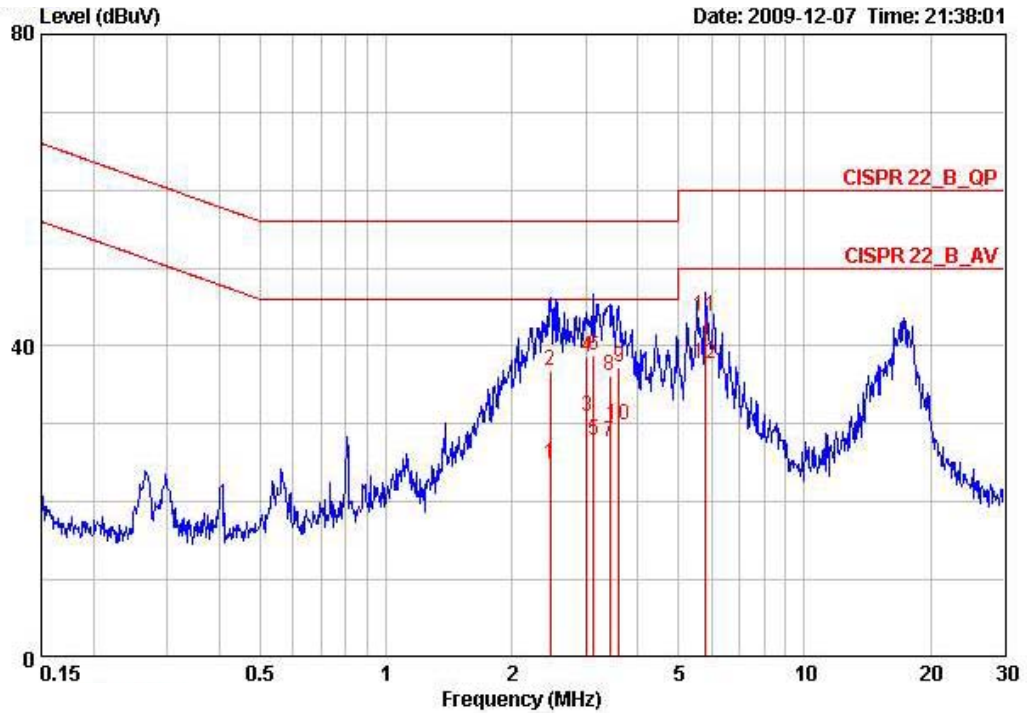

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	2.474	24.79	-21.21	46.00	24.48	0.11	0.20	AVERAGE
2	2.474	36.83	-19.17	56.00	36.52	0.11	0.20	QP
3	3.025	30.99	-15.01	46.00	30.66	0.12	0.21	AVERAGE
4	3.025	38.69	-17.31	56.00	38.36	0.12	0.21	QP
5	3.140	27.86	-18.14	46.00	27.50	0.12	0.23	AVERAGE
6	3.140	38.71	-17.29	56.00	38.35	0.12	0.23	QP
7	3.417	27.59	-18.41	46.00	27.18	0.13	0.28	AVERAGE
8	3.417	36.23	-19.77	56.00	35.82	0.13	0.28	QP
9	3.603	37.37	-18.63	56.00	36.94	0.13	0.30	QP
10	3.603	29.88	-16.12	46.00	29.45	0.13	0.30	AVERAGE
11	5.795	43.84	-16.16	60.00	43.30	0.24	0.30	QP
12	5.795	37.70	-12.30	50.00	37.16	0.24	0.30	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.
4. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.2.4. Test Setup Layout

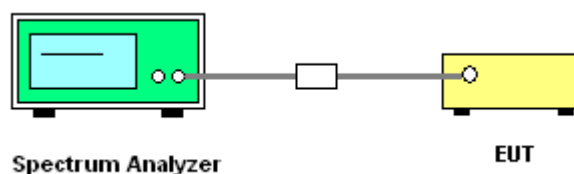

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 99% Occupied Bandwidth

Temperature	23°C	Humidity	56%
Test Engineer	Beck Wu	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	23.04	16.96
40	5200 MHz	23.36	16.96
48	5240 MHz	23.20	16.96
52	5260 MHz	24.00	16.96
60	5300 MHz	23.68	16.96
64	5320 MHz	22.88	16.96
100	5500 MHz	23.52	17.12
116	5580 MHz	25.60	18.56
140	5700 MHz	24.16	17.12

Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	46.40	36.48
46	5230 MHz	47.52	36.64
54	5270 MHz	47.36	36.48
62	5310 MHz	47.52	36.64
102	5510MHz	46.08	36.64
110	5550 MHz	46.72	36.64
134	5670 MHz	46.72	36.48

Temperature	23°C	Humidity	56%
Test Engineer	Beck Wu	Configurations	IEEE 802.11a

Configuration IEEE 802.11a Ant. A + Ant. B


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	23.36	16.96
40	5200 MHz	23.36	16.96
48	5240 MHz	23.20	16.96
52	5260 MHz	23.20	17.12
60	5300 MHz	23.68	16.96
64	5320 MHz	23.20	16.96
100	5500 MHz	23.68	17.12
116	5580 MHz	22.72	17.12
140	5700 MHz	23.68	16.96

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5180 MHz

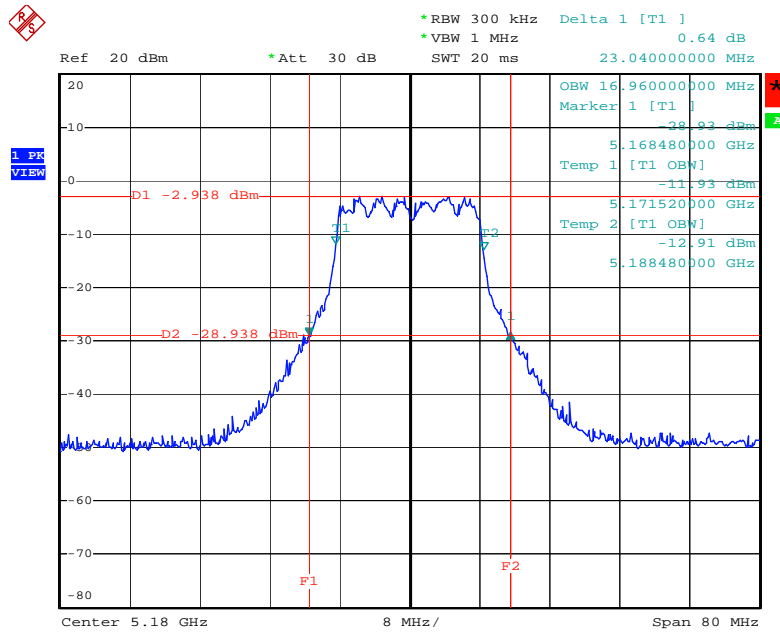


Date: 25.NOV.2009 14:54:02

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5200 MHz

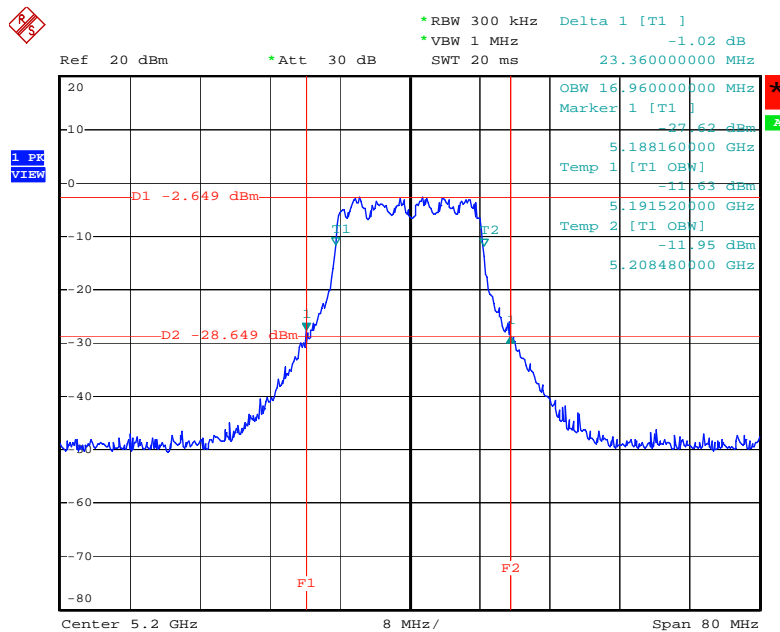


Date: 25.NOV.2009 14:55:12

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5240 MHz

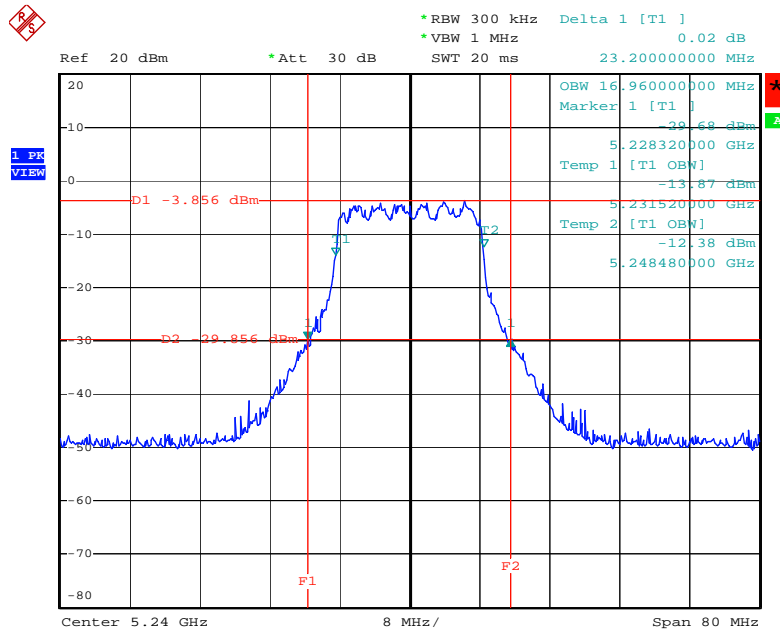


Date: 25.NOV.2009 14:56:07

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5260 MHz

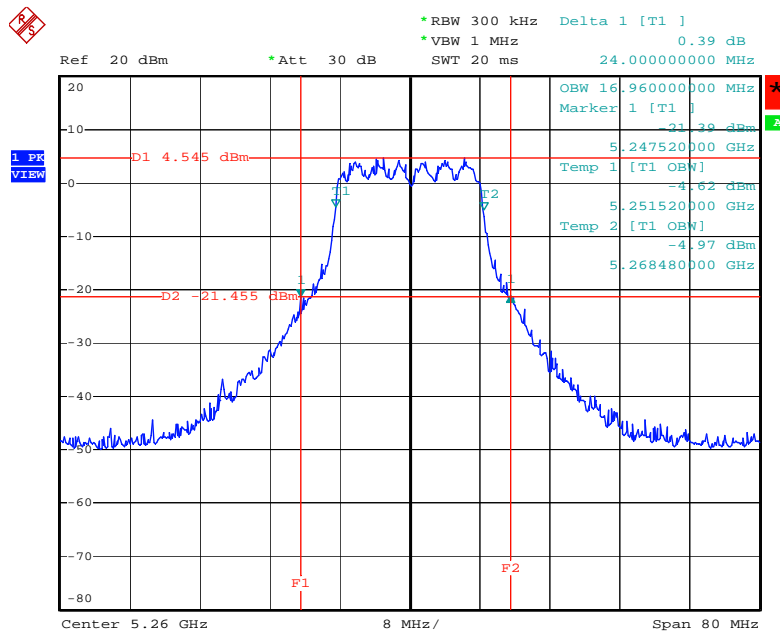


Date: 25.NOV.2009 14:57:11

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5300 MHz

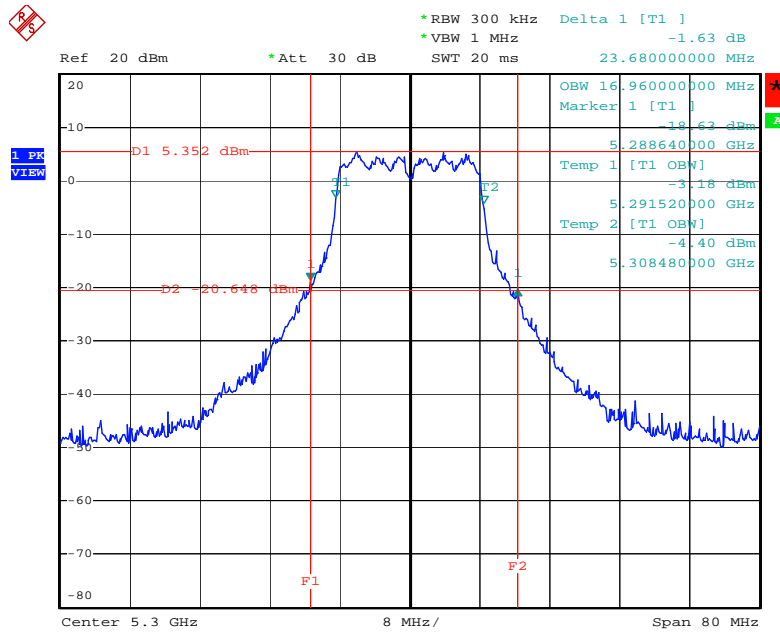


Date: 25.NOV.2009 14:58:08

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5320 MHz

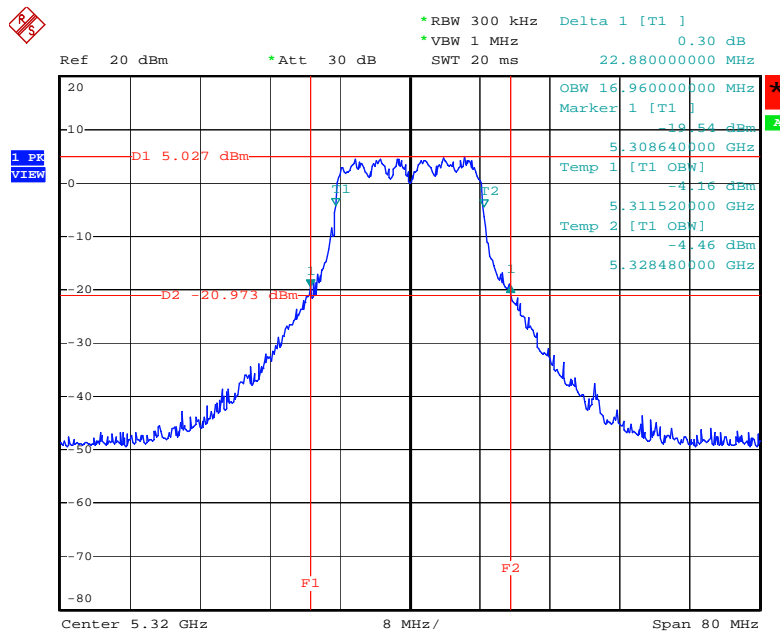


Date: 25.NOV.2009 14:58:58

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5500 MHz

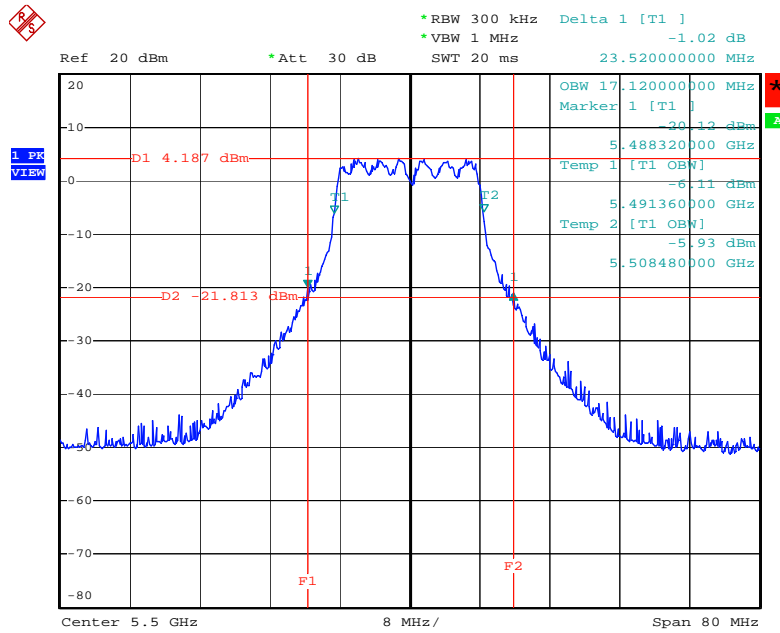


Date: 25.NOV.2009 14:59:59

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5580 MHz

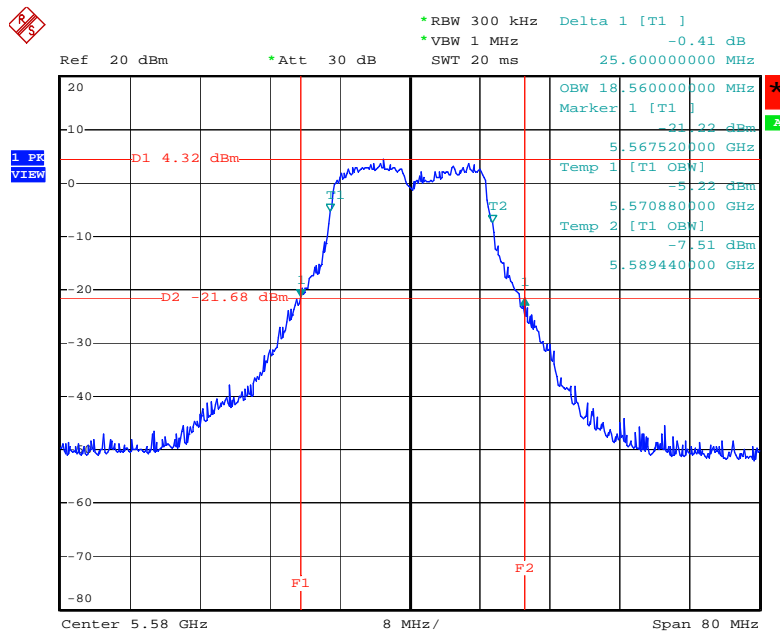


Date: 25.NOV.2009 15:02:43

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5700 MHz

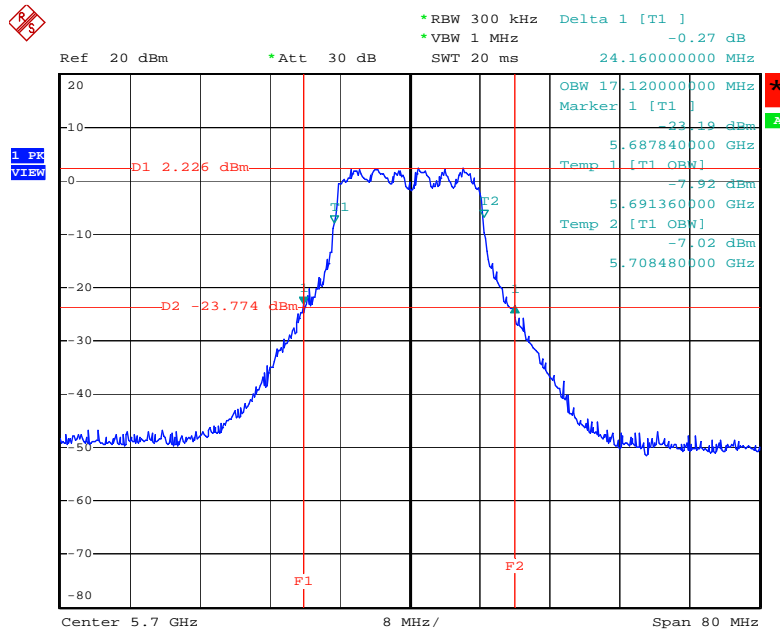


Date: 25.NOV.2009 15:01:19

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5190 MHz

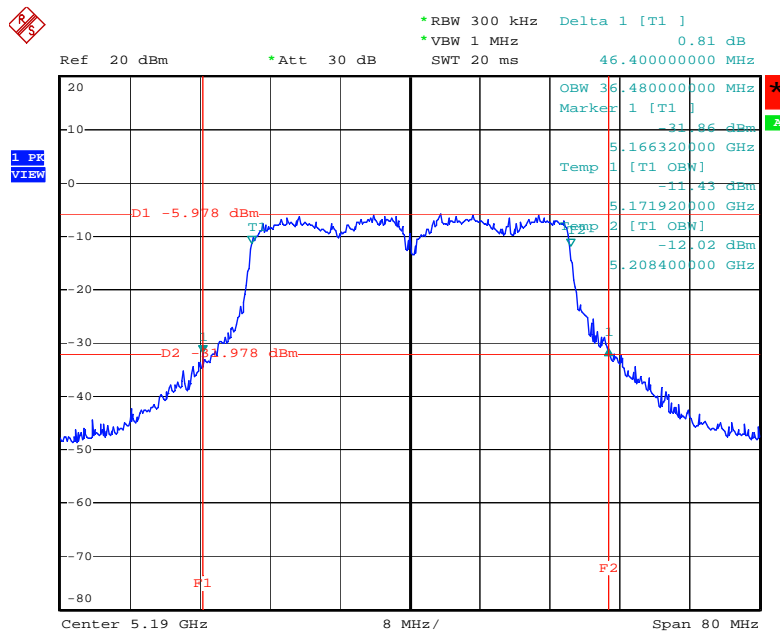


Date: 25.NOV.2009 15:36:34

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5230 MHz

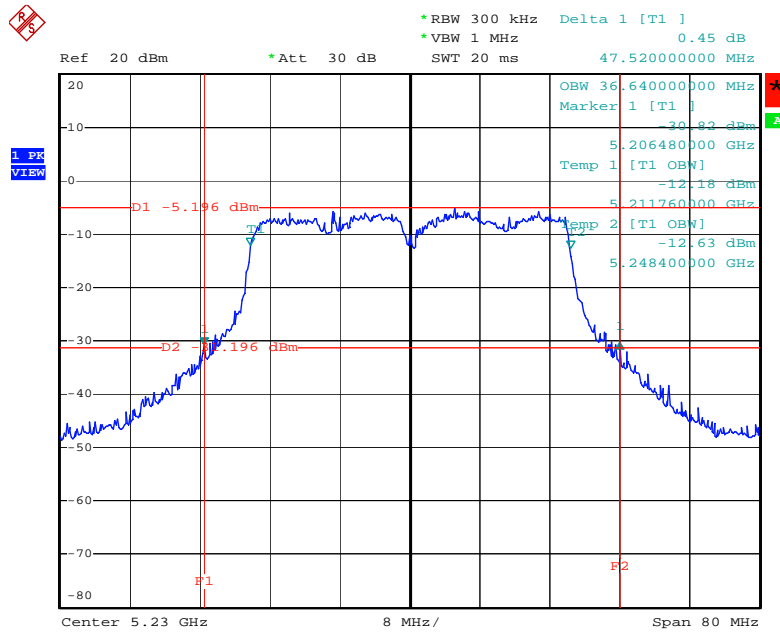


Date: 25.NOV.2009 15:37:57

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5270 MHz

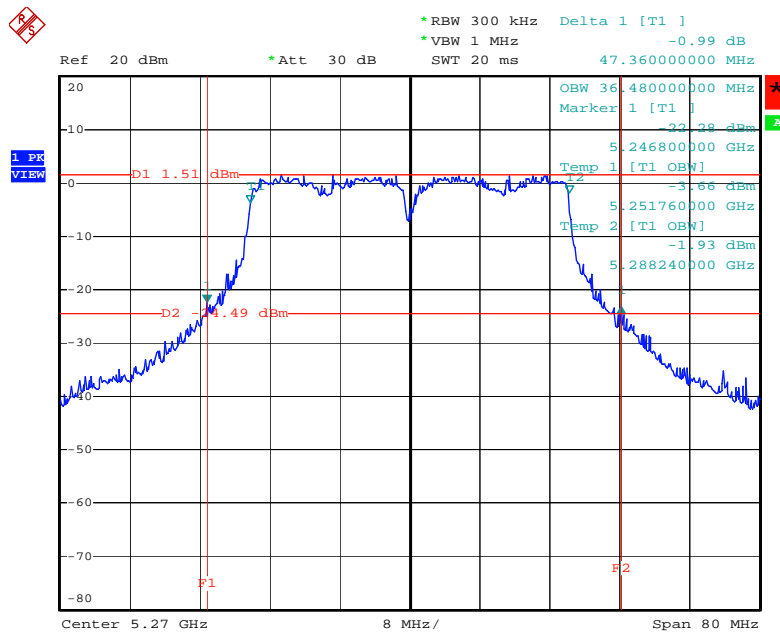


Date: 25.NOV.2009 15:39:13

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5310 MHz

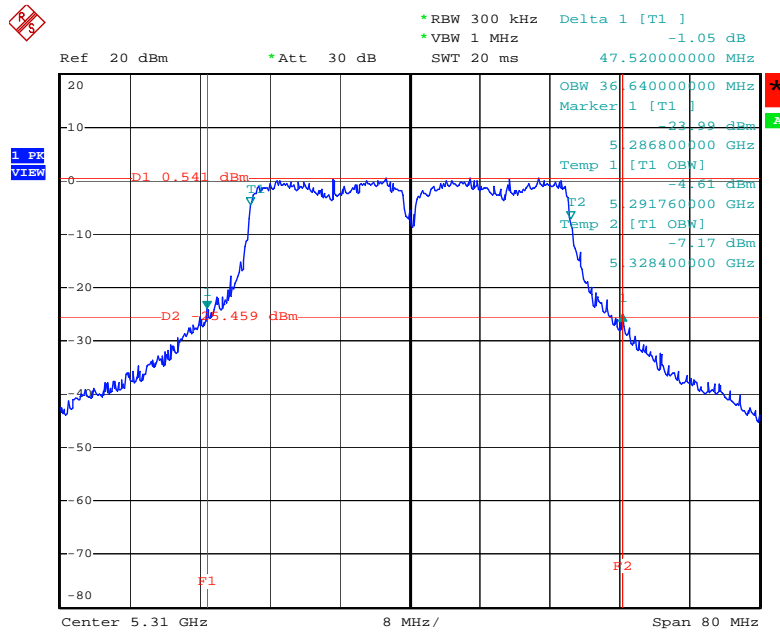


Date: 25.NOV.2009 15:41:59

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5510MHz

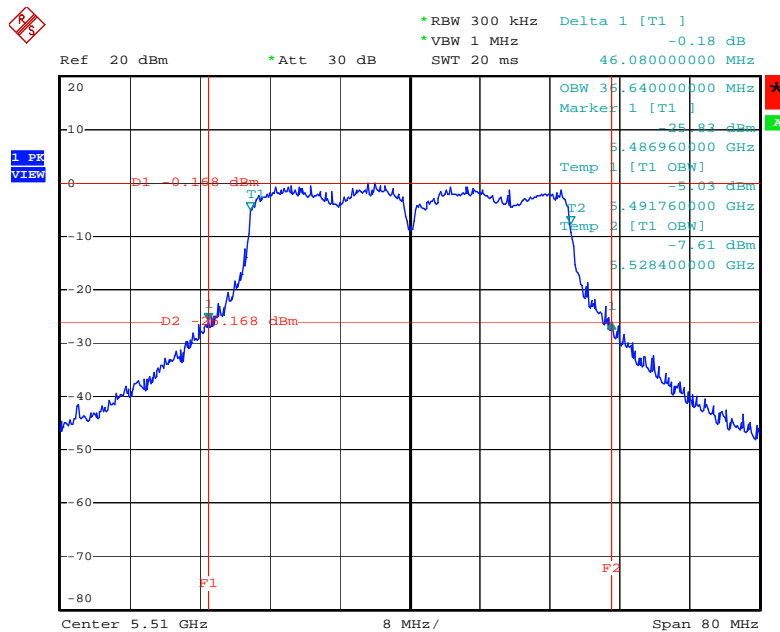


Date: 25.NOV.2009 15:43:26

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5550 MHz

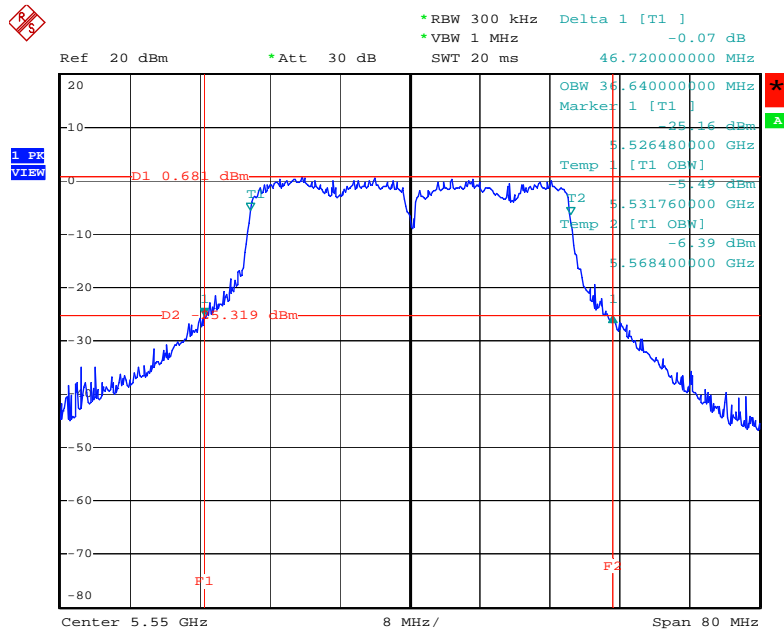


Date: 25.NOV.2009 15:44:46

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5670 MHz

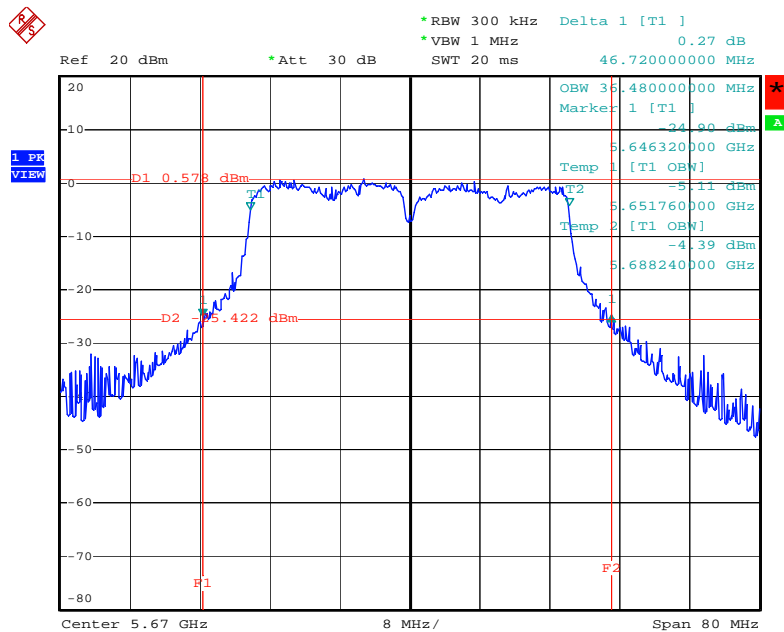


Date: 25.NOV.2009 15:45:53

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5180 MHz

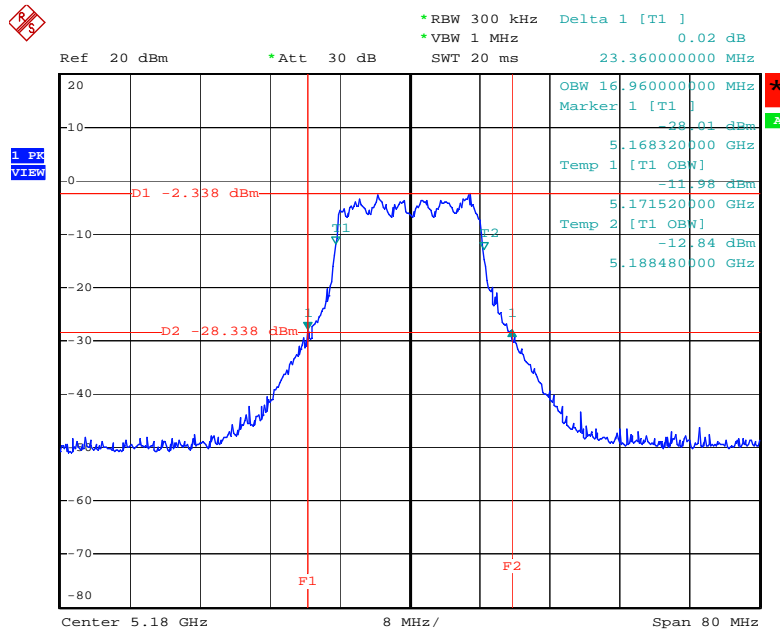


Date: 25.NOV.2009 15:26:56

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5200 MHz

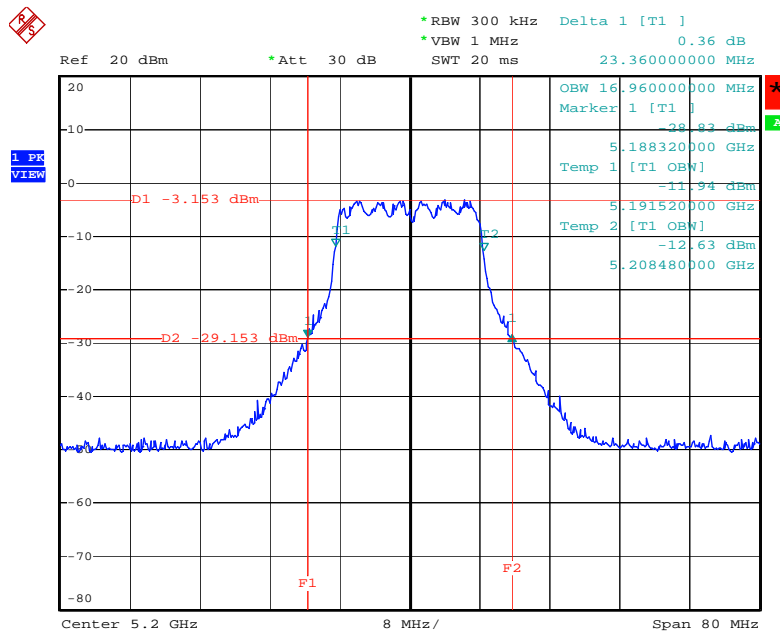


Date: 25.NOV.2009 15:25:57

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5240 MHz

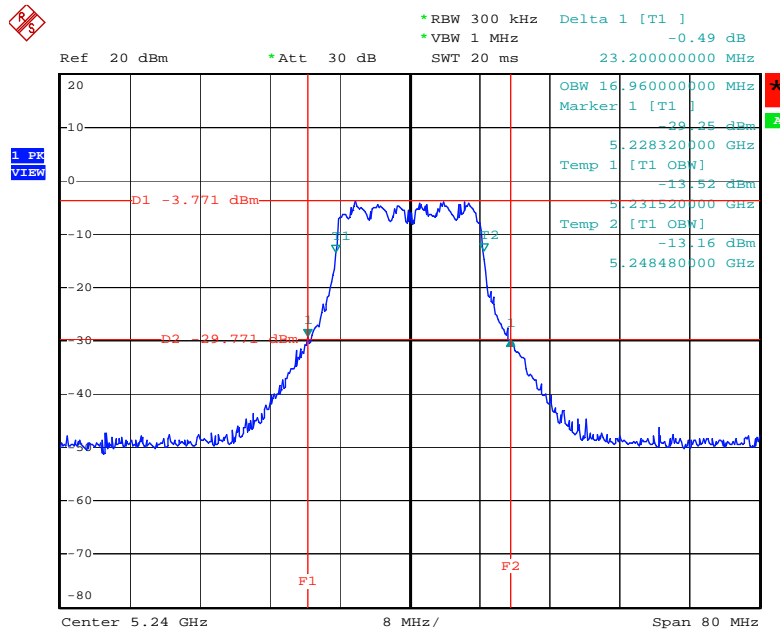


Date: 25.NOV.2009 15:25:06

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5260 MHz

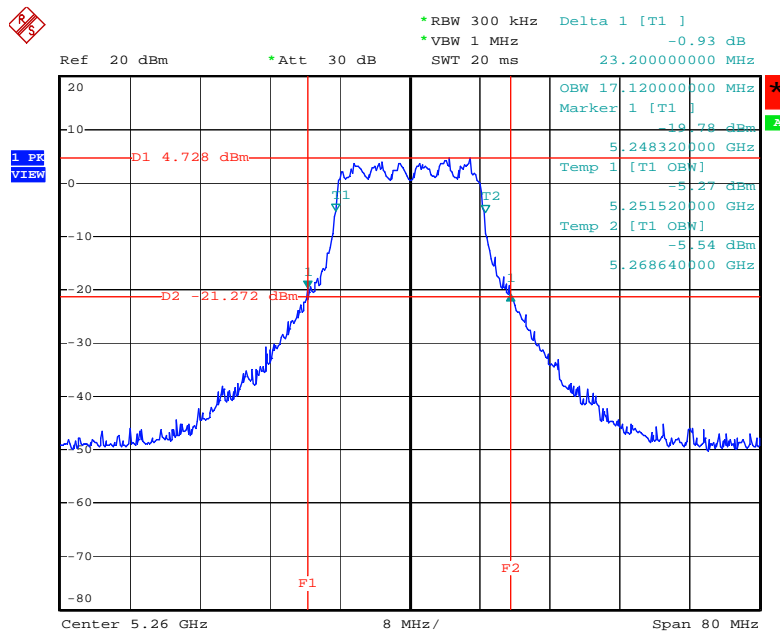


Date: 25.NOV.2009 15:24:01

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5300 MHz

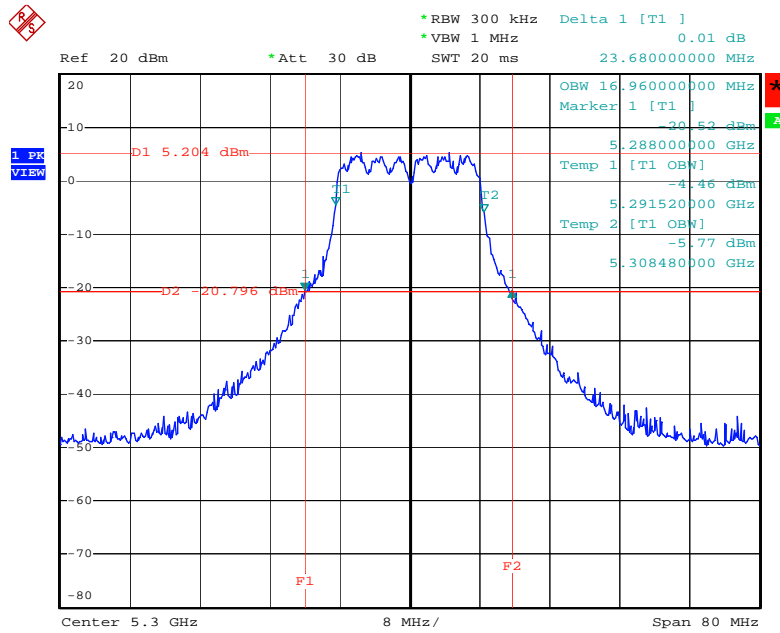


Date: 25.NOV.2009 15:22:45

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5320 MHz

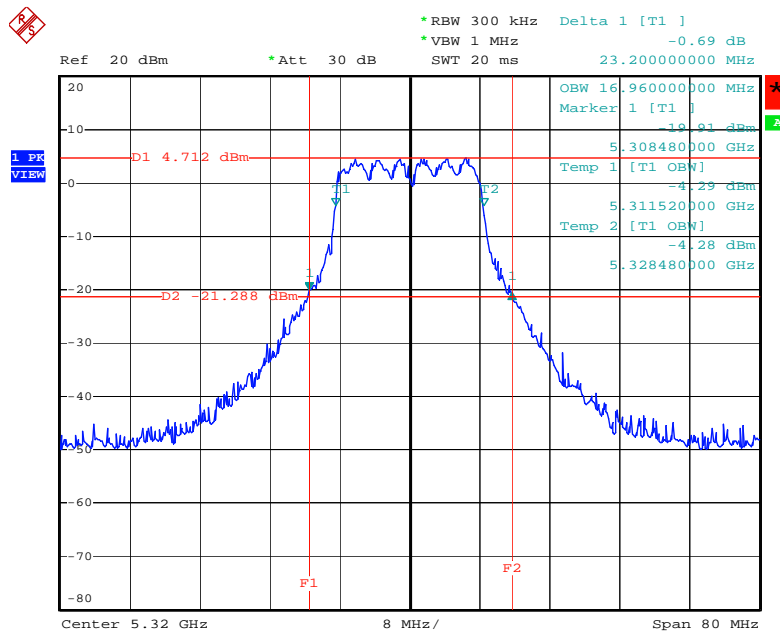


Date: 25.NOV.2009 15:21:47

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5500 MHz

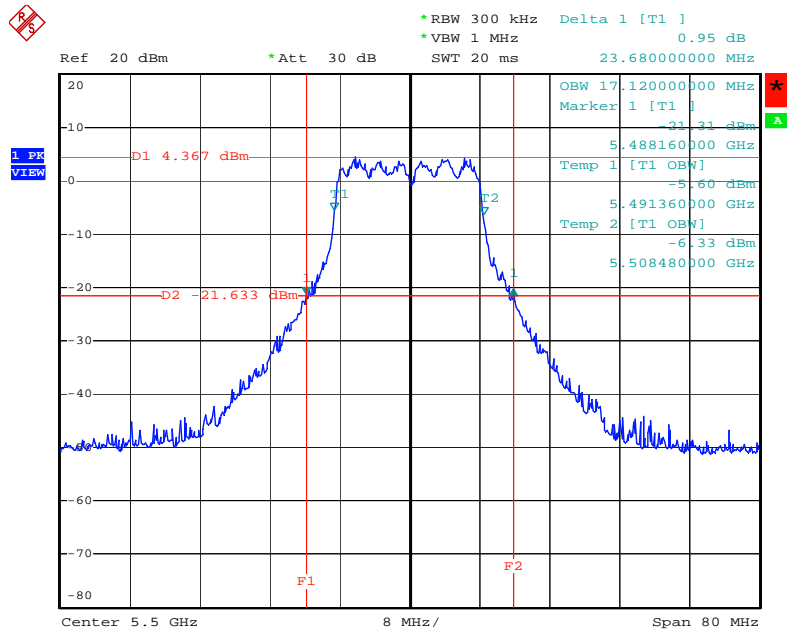


Date: 25.NOV.2009 15:20:46

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5580 MHz

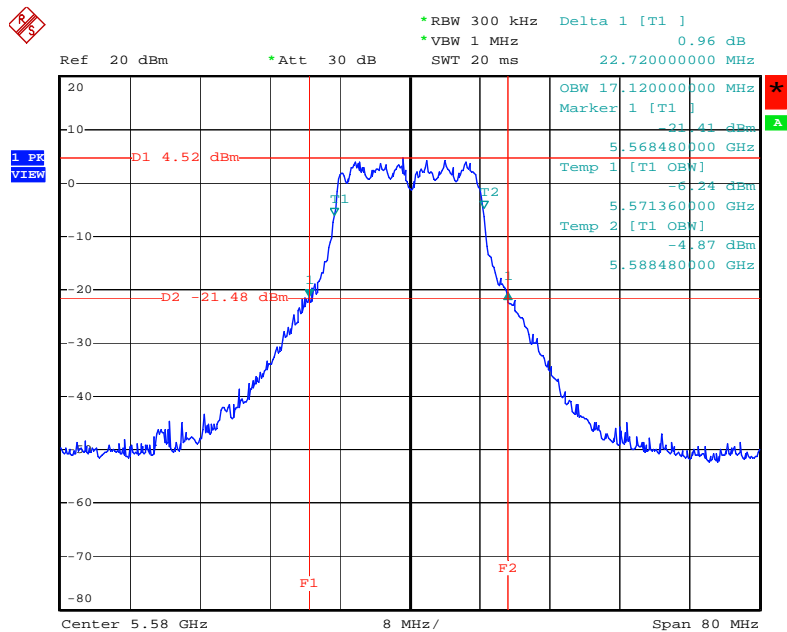

Date: 25.NOV.2009 15:15:21

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5700 MHz

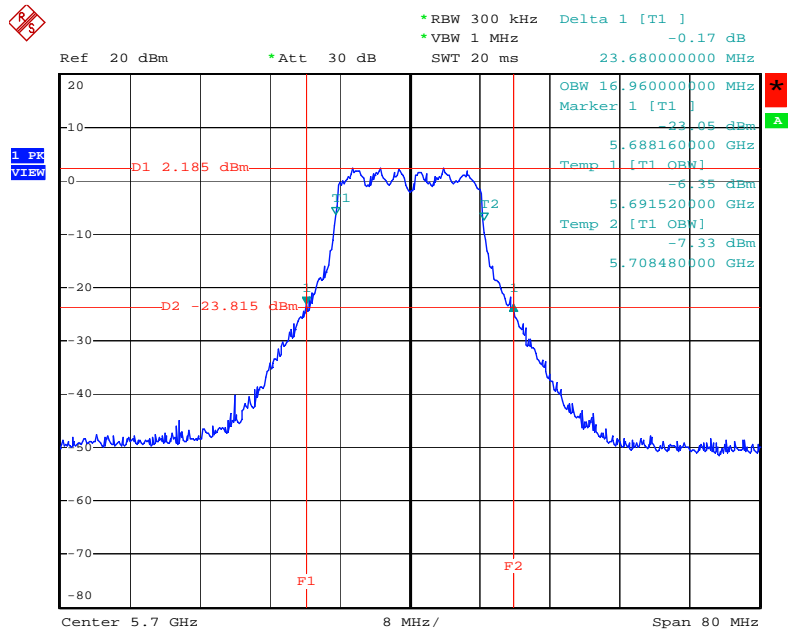

Date: 25.NOV.2009 15:18:31

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.470-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or $11 \text{ dBm} + 10\log B$. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W (30dBm) or $17 \text{ dBm} + 10\log B$. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power and peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	PEAK
Trace	MAX HOLD
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout

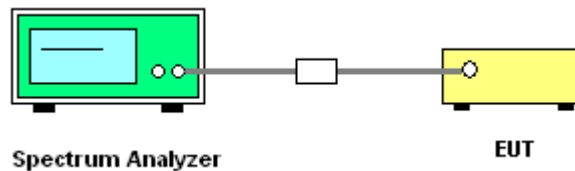

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	23°C	Humidity	56%
Test Engineer	Beck Wu	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 20MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	12.68	17.00	Complies
40	5200 MHz	12.59	17.00	Complies
48	5240 MHz	12.80	17.00	Complies
52	5260 MHz	20.53	24.00	Complies
60	5300 MHz	20.90	24.00	Complies
64	5320 MHz	20.91	24.00	Complies
100	5500 MHz	20.03	24.00	Complies
116	5580 MHz	20.12	24.00	Complies
140	5700 MHz	20.77	24.00	Complies

Configuration IEEE 802.11n MCS0 20MHz Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	13.06	17.00	Complies
40	5200 MHz	13.32	17.00	Complies
48	5240 MHz	13.23	17.00	Complies
52	5260 MHz	20.57	24.00	Complies
60	5300 MHz	20.94	24.00	Complies
64	5320 MHz	20.87	24.00	Complies
100	5500 MHz	21.56	24.00	Complies
116	5580 MHz	20.69	24.00	Complies
140	5700 MHz	20.55	24.00	Complies

Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	15.88	17.00	Complies
40	5200 MHz	15.98	17.00	Complies
48	5240 MHz	16.03	17.00	Complies
52	5260 MHz	23.56	24.00	Complies
60	5300 MHz	23.93	24.00	Complies
64	5320 MHz	23.90	24.00	Complies
100	5500 MHz	23.87	24.00	Complies
116	5580 MHz	23.42	24.00	Complies
140	5700 MHz	23.67	24.00	Complies

Configuration IEEE 802.11n MCS0 40MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	13.37	17.00	Complies
46	5230 MHz	13.45	17.00	Complies
54	5270 MHz	20.74	24.00	Complies
62	5310 MHz	19.46	24.00	Complies
102	5510MHz	19.49	24.00	Complies
110	5550 MHz	20.65	24.00	Complies
134	5670 MHz	20.89	24.00	Complies

Configuration IEEE 802.11n MCS0 40MHz Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	14.38	17.00	Complies
46	5230 MHz	14.31	17.00	Complies
54	5270 MHz	20.89	24.00	Complies
62	5310 MHz	19.66	24.00	Complies
102	5510MHz	20.13	24.00	Complies
110	5550 MHz	21.05	24.00	Complies
134	5670 MHz	20.88	24.00	Complies

Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	16.91	17.00	Complies
46	5230 MHz	16.91	17.00	Complies
54	5270 MHz	23.83	24.00	Complies
62	5310 MHz	22.57	24.00	Complies
102	5510MHz	22.83	24.00	Complies
110	5550 MHz	23.86	24.00	Complies
134	5670 MHz	23.90	24.00	Complies

Temperature	23°C	Humidity	56%
Test Engineer	Beck Wu	Configurations	IEEE 802.11a

Configuration IEEE 802.11a Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	13.06	17.00	Complies
40	5200 MHz	13.49	17.00	Complies
48	5240 MHz	12.66	17.00	Complies
52	5260 MHz	20.20	24.00	Complies
60	5300 MHz	20.62	24.00	Complies
64	5320 MHz	20.32	24.00	Complies
100	5500 MHz	19.85	24.00	Complies
116	5580 MHz	20.84	24.00	Complies
140	5700 MHz	20.50	24.00	Complies


Configuration IEEE 802.11a Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	14.46	17.00	Complies
40	5200 MHz	14.37	17.00	Complies
48	5240 MHz	13.55	17.00	Complies
52	5260 MHz	20.85	24.00	Complies
60	5300 MHz	21.21	24.00	Complies
64	5320 MHz	20.71	24.00	Complies
100	5500 MHz	21.48	24.00	Complies
116	5580 MHz	20.88	24.00	Complies
140	5700 MHz	21.06	24.00	Complies

Configuration IEEE 802.11a Ant. A + Ant. B


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	16.83	17.00	Complies
40	5200 MHz	16.96	17.00	Complies
48	5240 MHz	16.14	17.00	Complies
52	5260 MHz	23.55	24.00	Complies
60	5300 MHz	23.94	24.00	Complies
64	5320 MHz	23.53	24.00	Complies
100	5500 MHz	23.75	24.00	Complies
116	5580 MHz	23.87	24.00	Complies
140	5700 MHz	23.80	24.00	Complies

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 5180 MHz

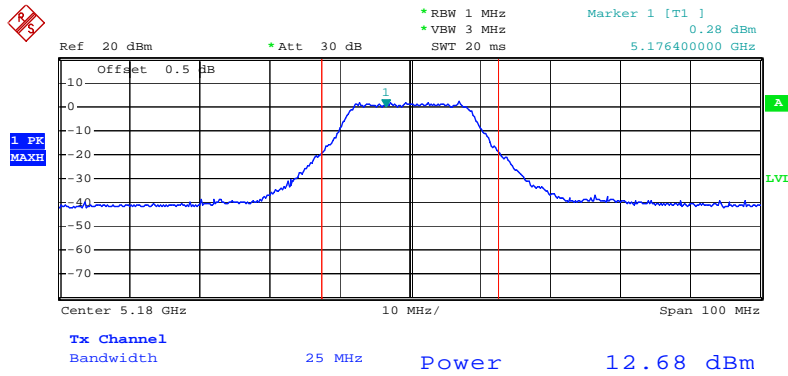


Date: 25.NOV.2009 16:26:45

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 5200 MHz

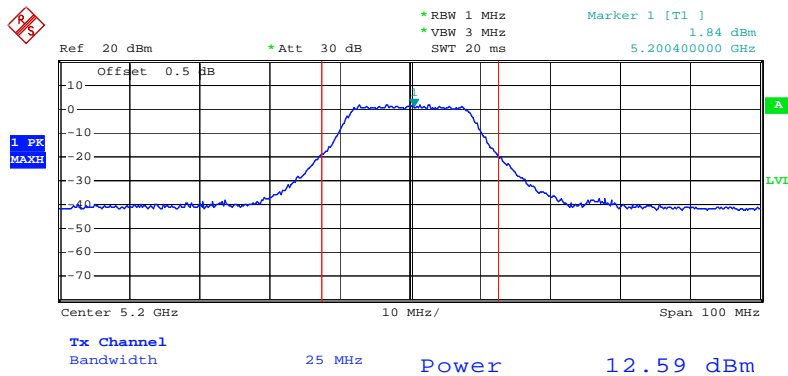


Date: 25.NOV.2009 16:28:02

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 5240 MHz

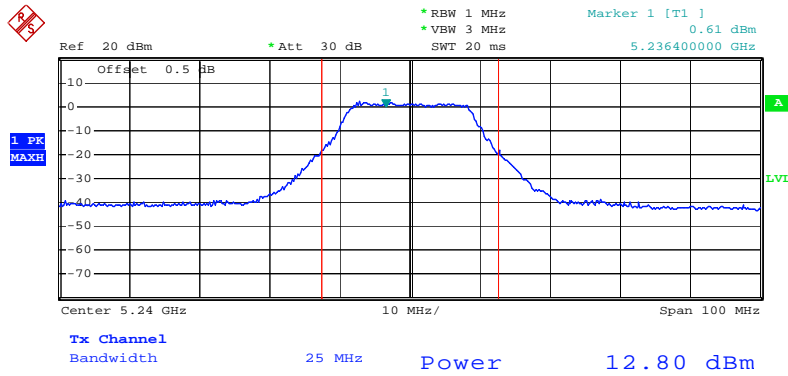


Date: 25.NOV.2009 16:31:26

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 5260 MHz

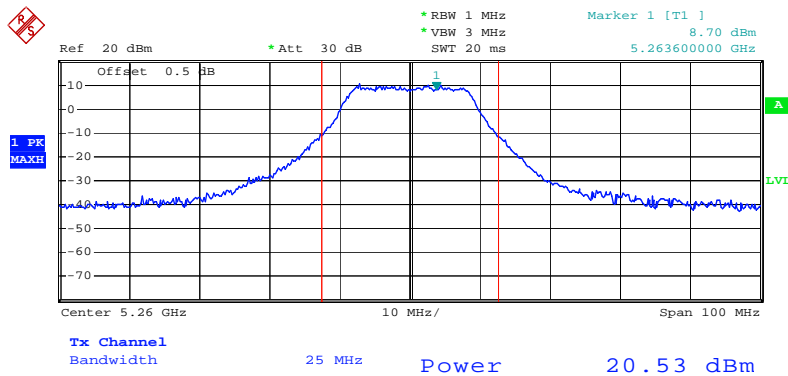


Date: 25.NOV.2009 16:33:20

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 5300 MHz

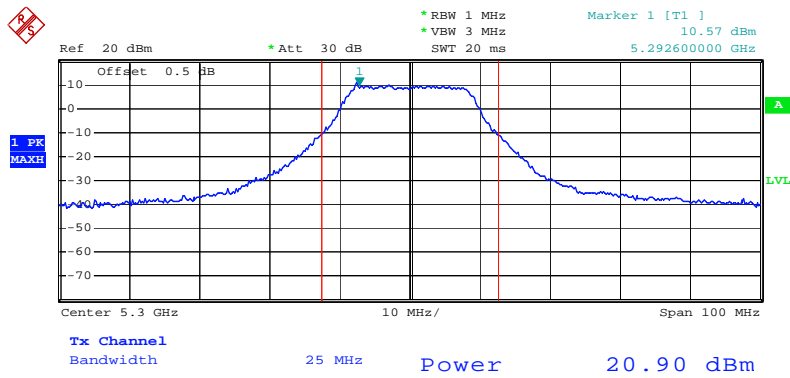


Date: 25.NOV.2009 16:36:53

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 5320 MHz

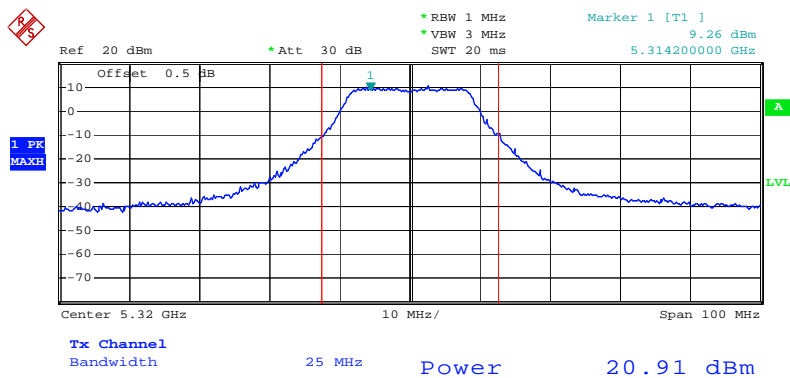


Date: 25.NOV.2009 16:37:52

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 5500 MHz

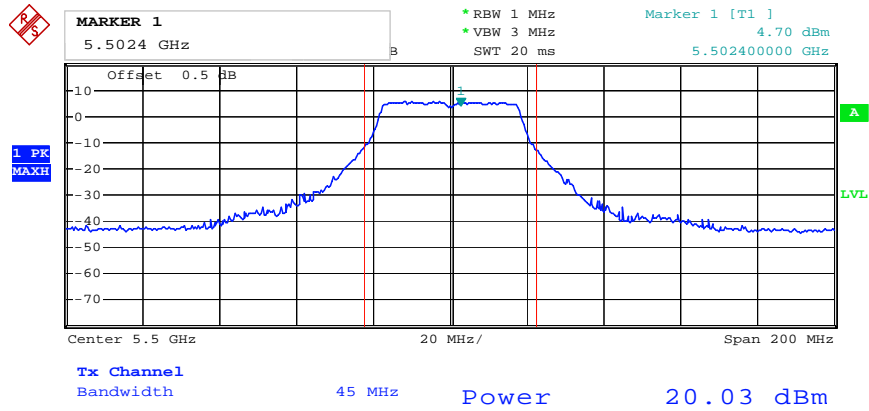


Date: 25.NOV.2009 11:33:09

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 5580 MHz

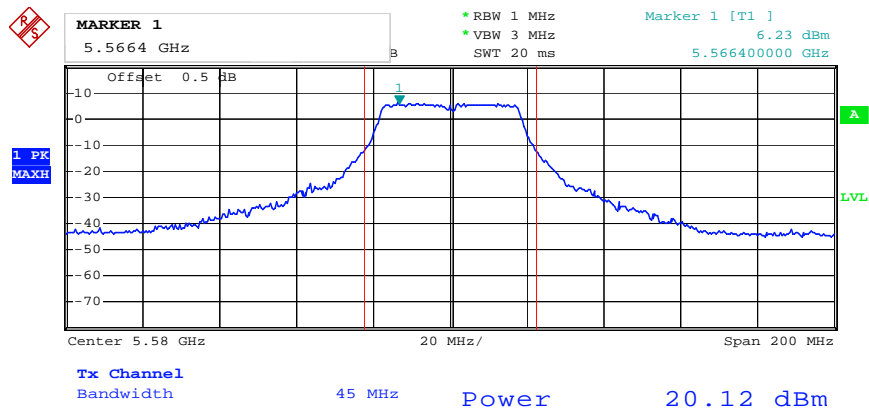


Date: 25.NOV.2009 11:24:54

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 5700 MHz

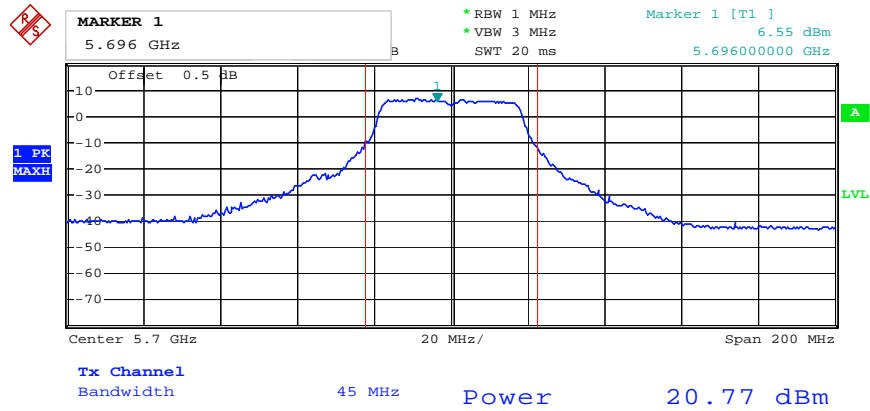


Date: 25.NOV.2009 11:21:41

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 5180 MHz

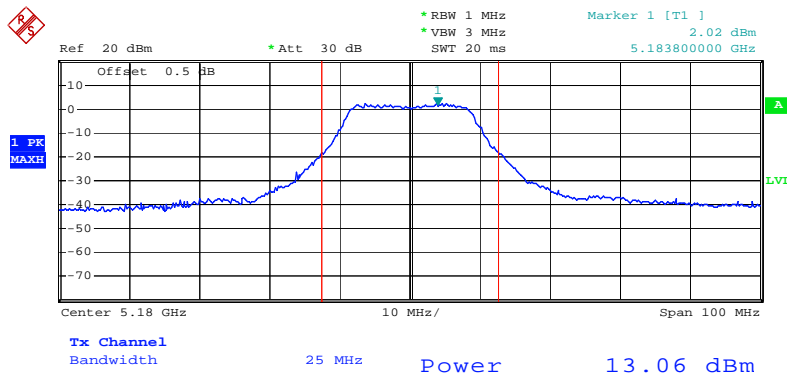


Date: 25.NOV.2009 16:25:16

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 5200 MHz

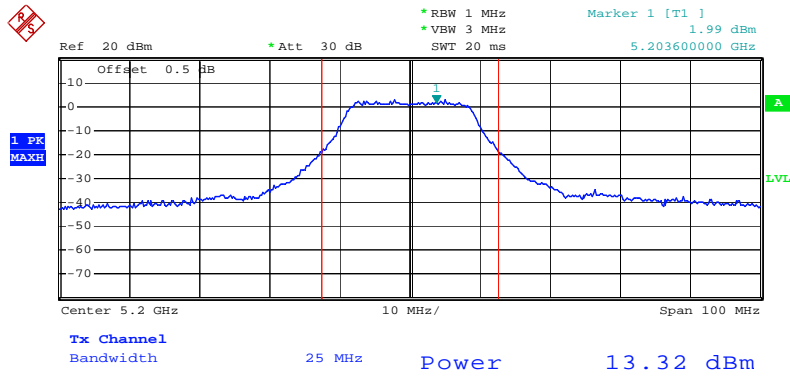


Date: 25.NOV.2009 16:29:28

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 5240 MHz

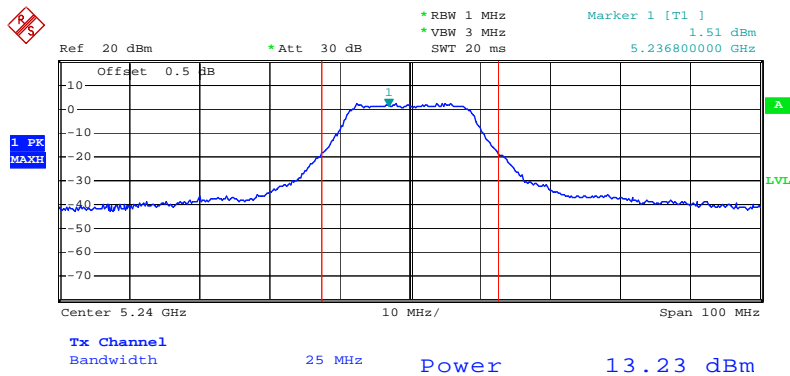


Date: 25.NOV.2009 16:30:29

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 5260 MHz

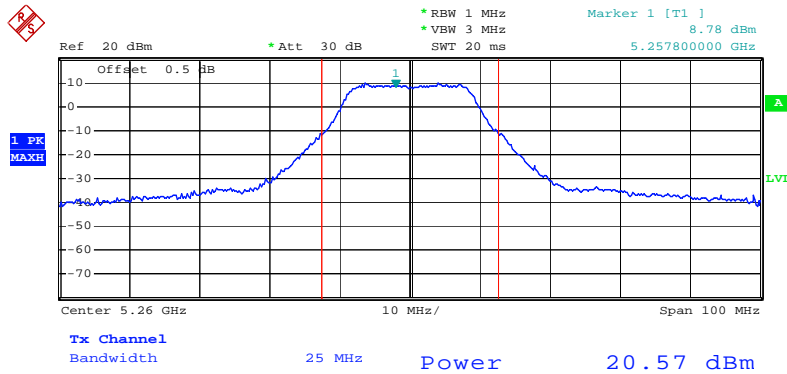


Date: 25.NOV.2009 16:34:28

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 5300 MHz

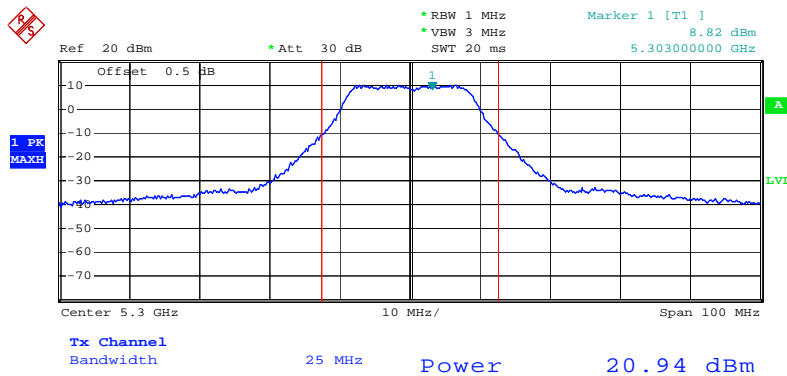


Date: 25.NOV.2009 16:35:55

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 5320 MHz

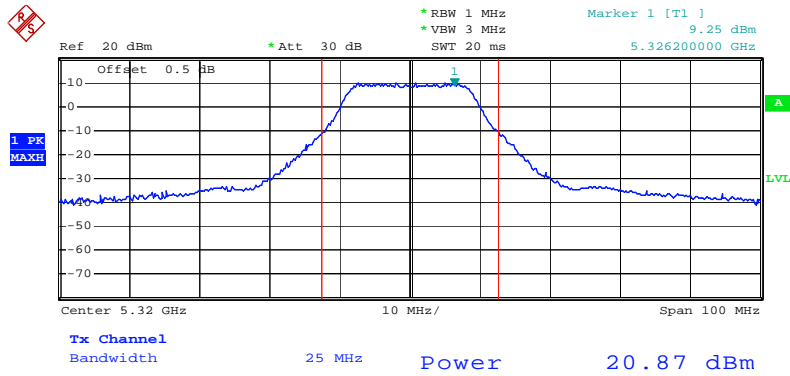


Date: 25.NOV.2009 16:38:37

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 5500 MHz

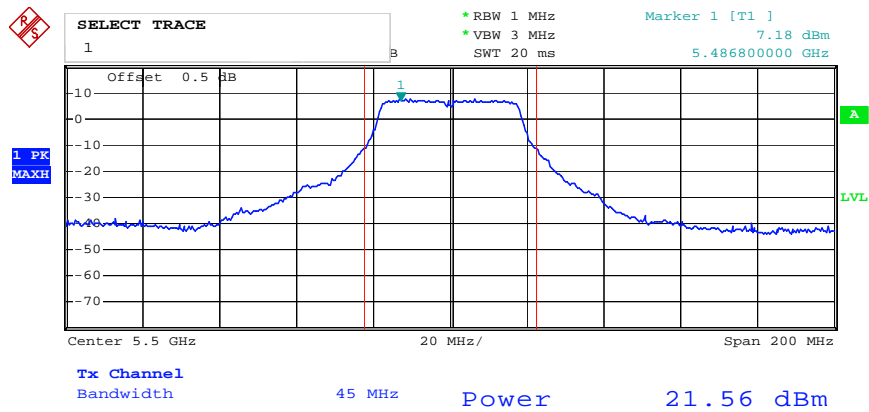


Date: 25.NOV.2009 11:30:58

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 5580 MHz

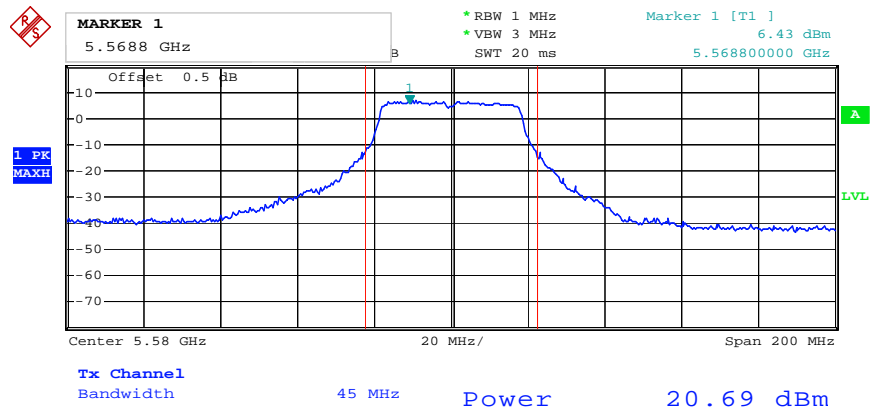


Date: 25.NOV.2009 11:23:42

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 5700 MHz

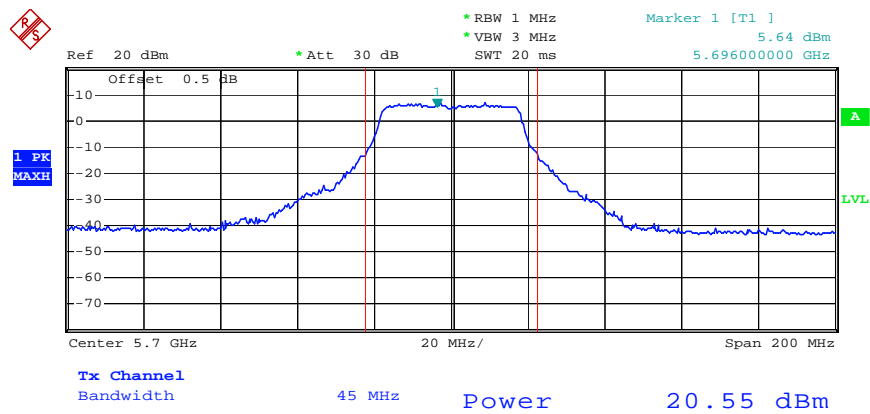


Date: 25.NOV.2009 11:22:52

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 5190 MHz

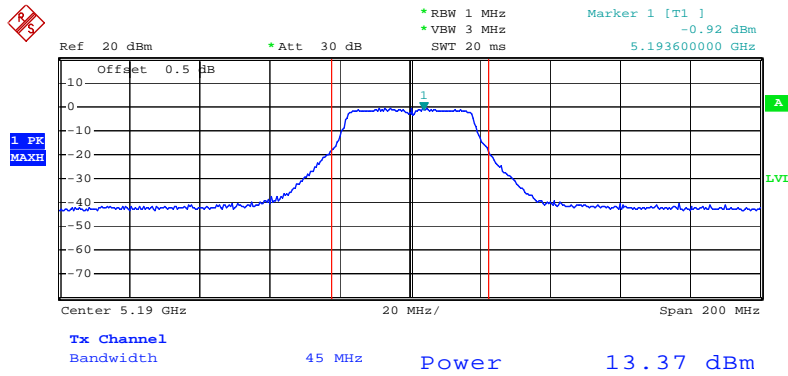


Date: 25.NOV.2009 16:00:52

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 5230 MHz

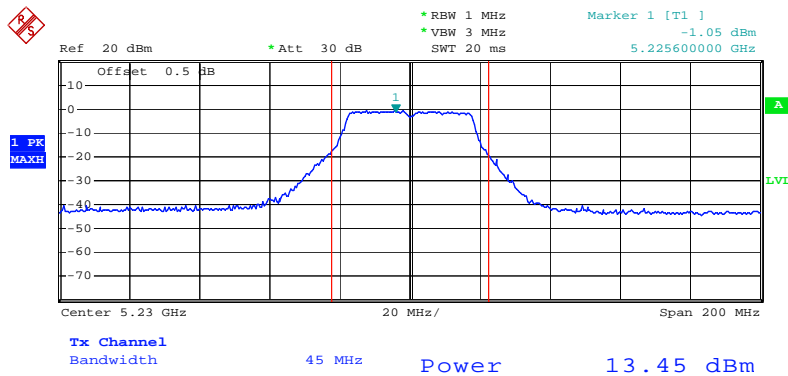


Date: 25.NOV.2009 16:05:50

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 5270 MHz

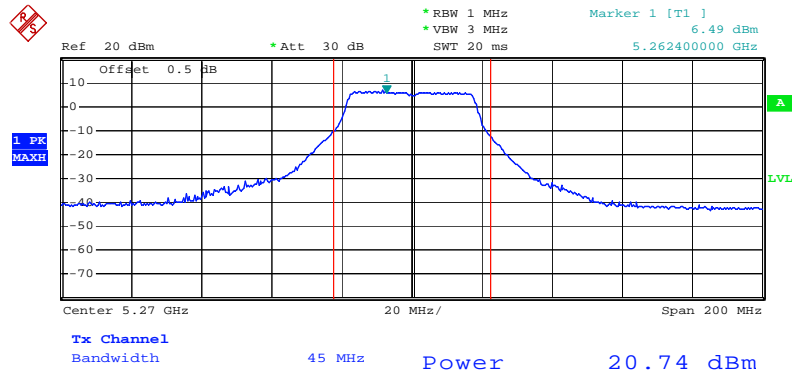


Date: 25.NOV.2009 16:10:41

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 5310 MHz

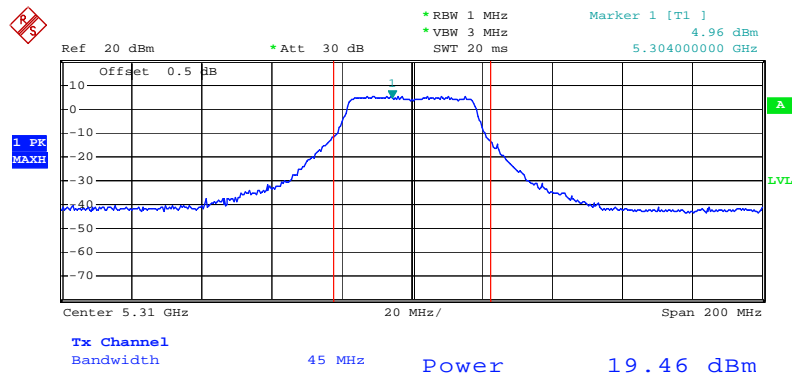


Date: 25.NOV.2009 16:12:14

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 5510MHz

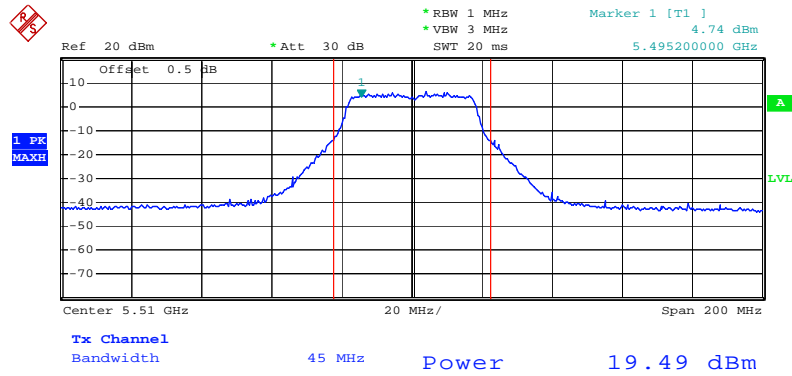


Date: 25.NOV.2009 16:15:58

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 5550 MHz

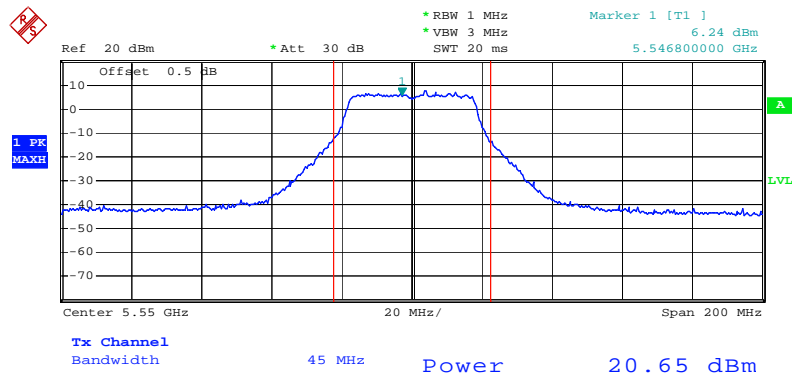


Date: 25.NOV.2009 16:17:46

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 5670 MHz

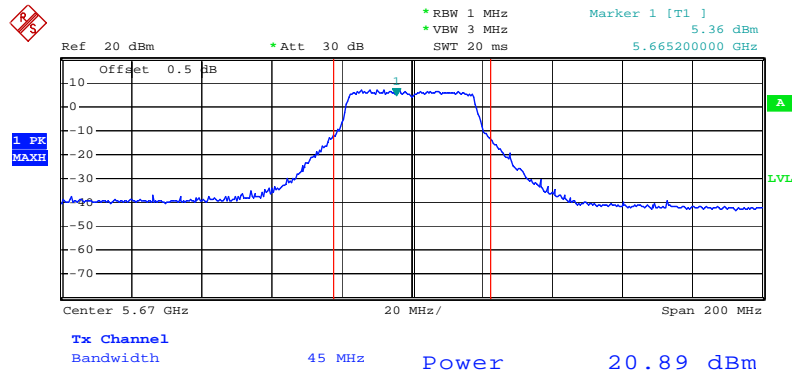


Date: 25.NOV.2009 16:20:57

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 5190 MHz

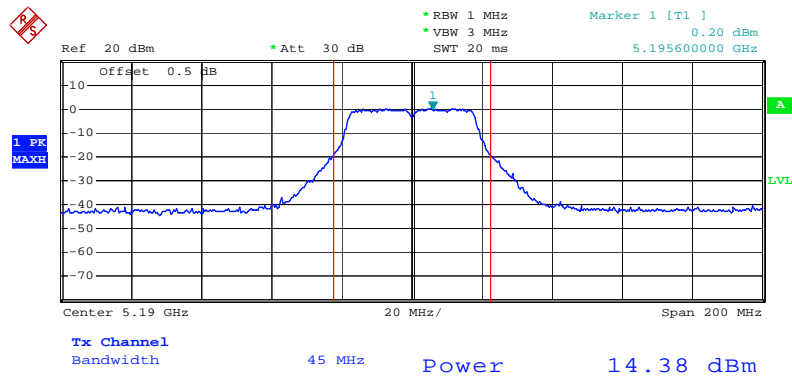


Date: 25.NOV.2009 16:03:37

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 5230 MHz

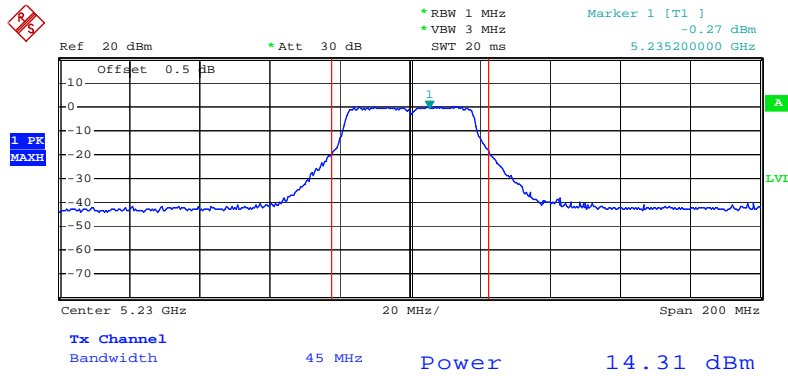


Date: 25.NOV.2009 16:04:53

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 5270 MHz

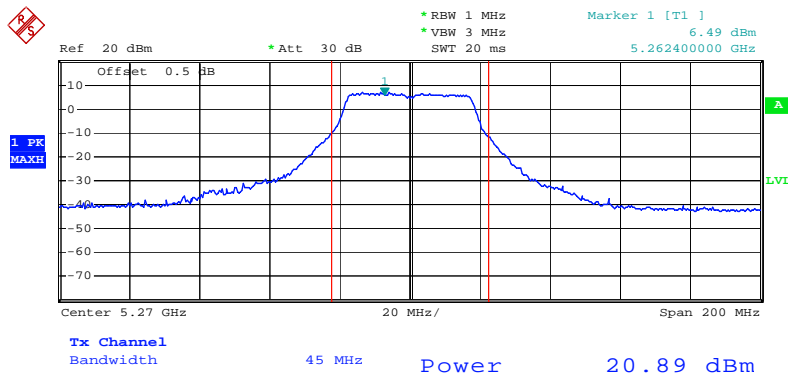


Date: 25.NOV.2009 16:11:04

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 5310 MHz

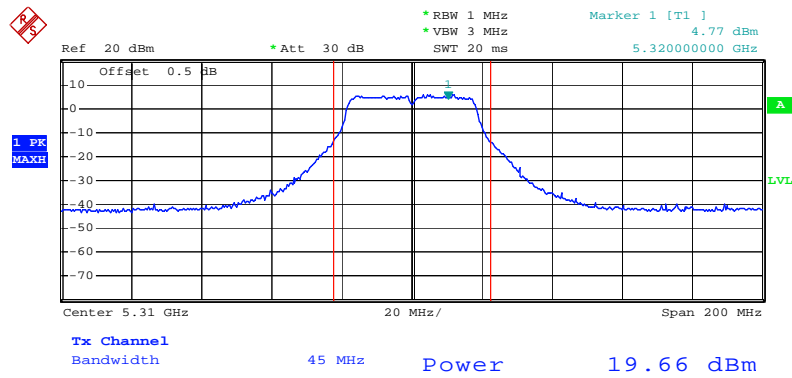


Date: 25.NOV.2009 16:13:11

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 5510MHz

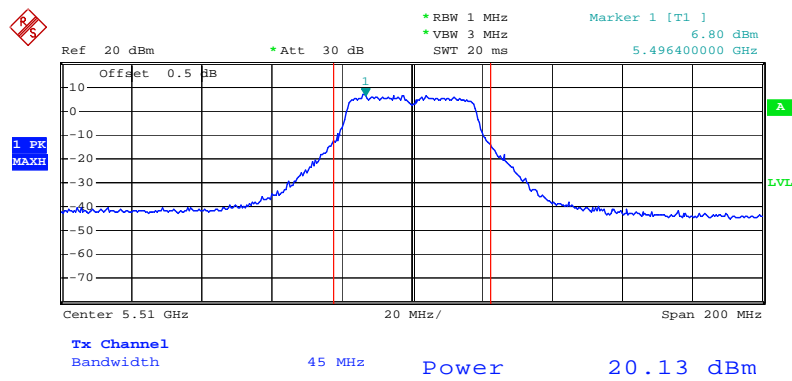


Date: 25.NOV.2009 16:15:09

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 5550 MHz

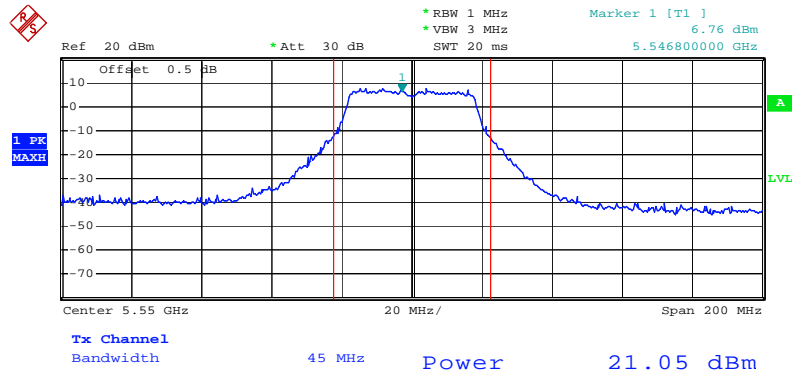


Date: 25.NOV.2009 16:18:26

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 5670 MHz

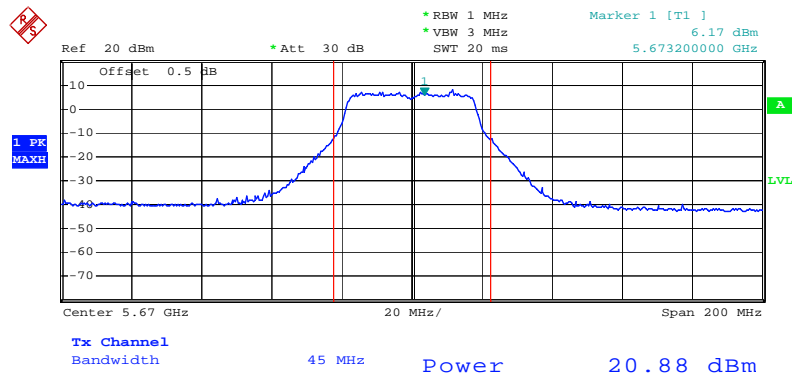


Date: 25.NOV.2009 16:20:08

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5180 MHz

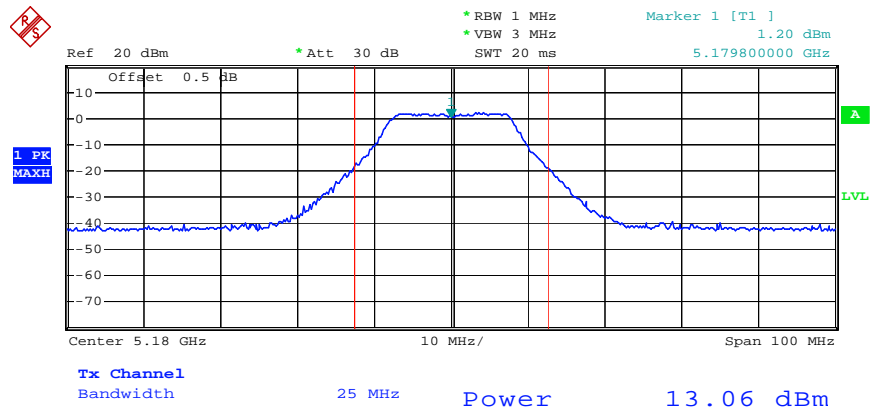


Date: 25.NOV.2009 10:27:09

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5200 MHz

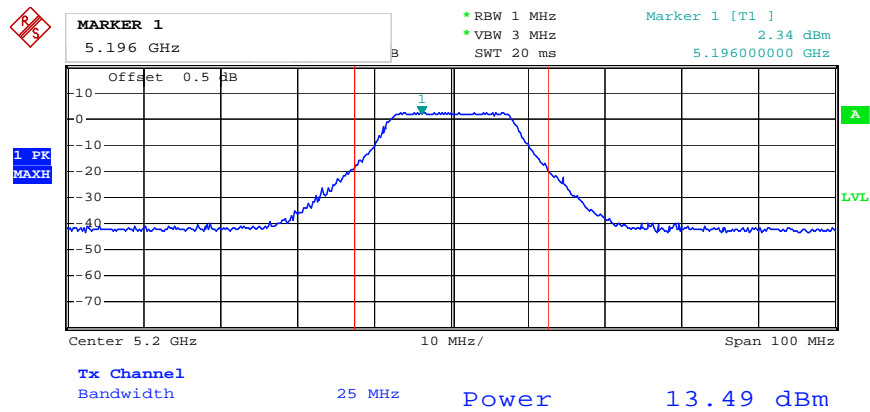


Date: 25.NOV.2009 10:29:30

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5240 MHz

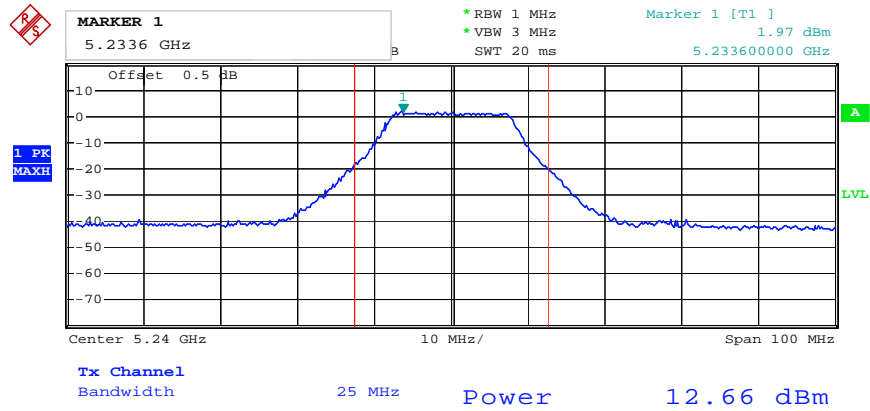


Date: 25.NOV.2009 10:35:25

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5260 MHz

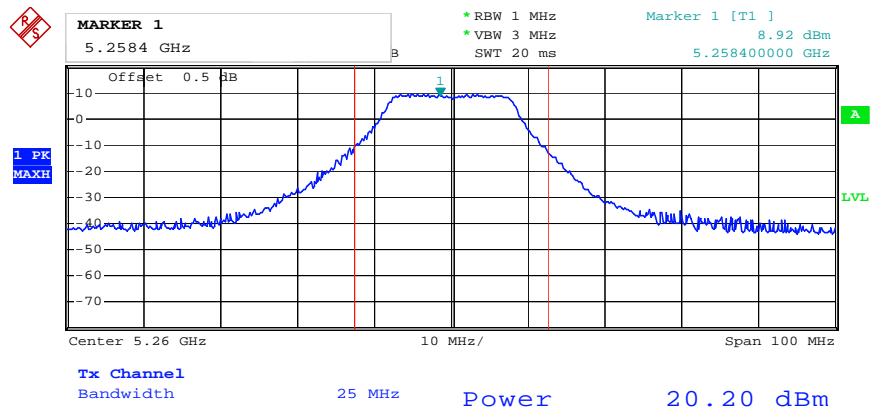


Date: 25.NOV.2009 10:36:14

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5300 MHz

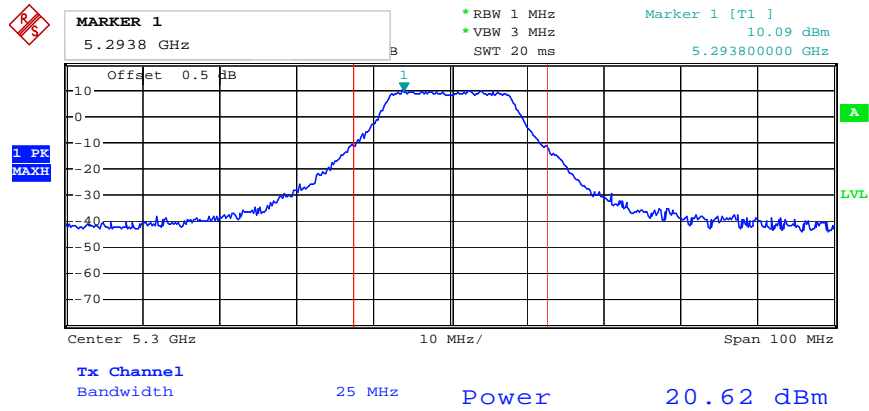


Date: 25.NOV.2009 10:38:27

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5320 MHz

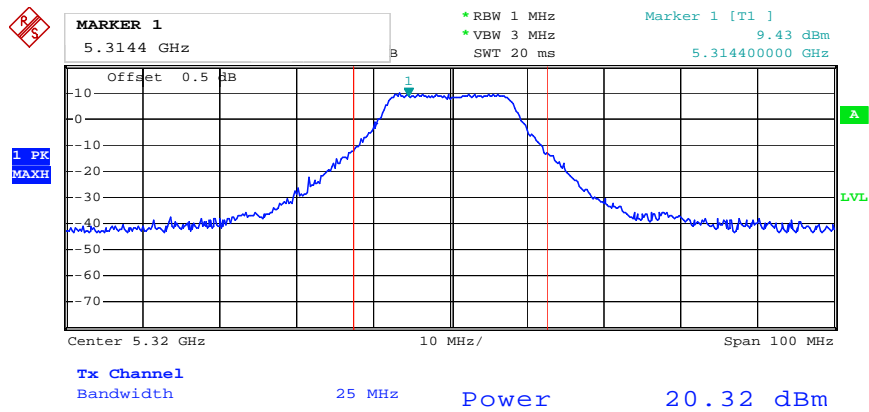


Date: 25.NOV.2009 10:39:25

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5500 MHz

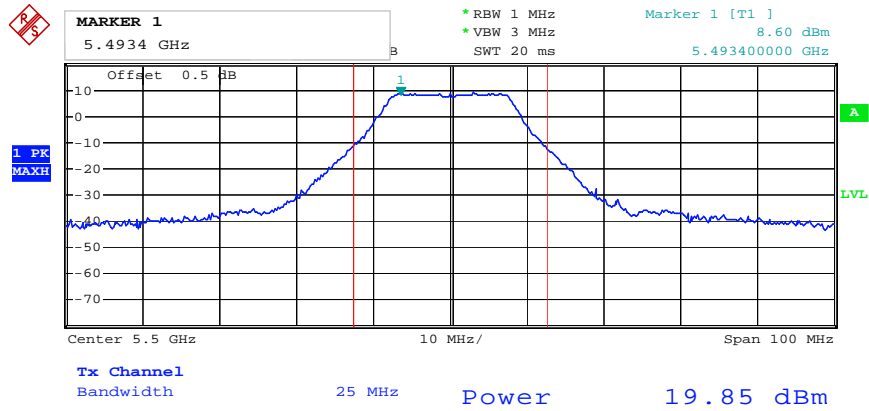


Date: 25.NOV.2009 10:43:00

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5580 MHz

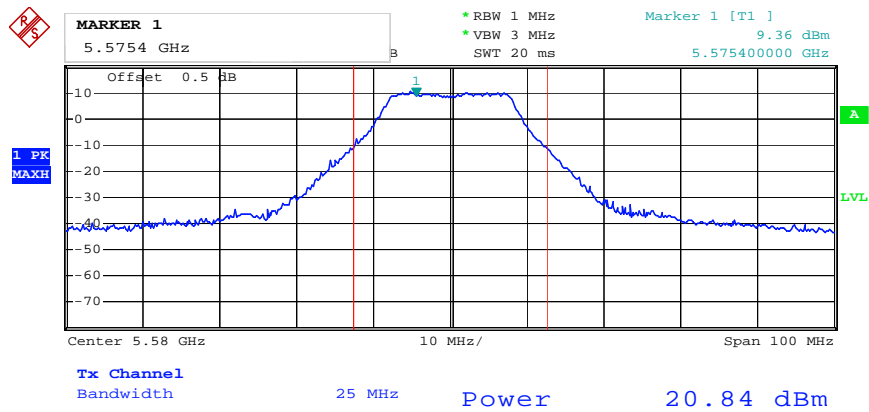


Date: 25.NOV.2009 10:46:30

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5700 MHz

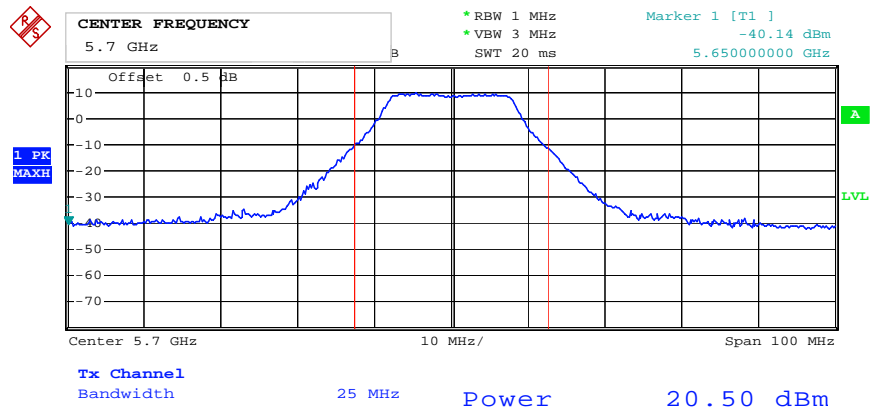


Date: 25.NOV.2009 10:47:21

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. B / 5180 MHz

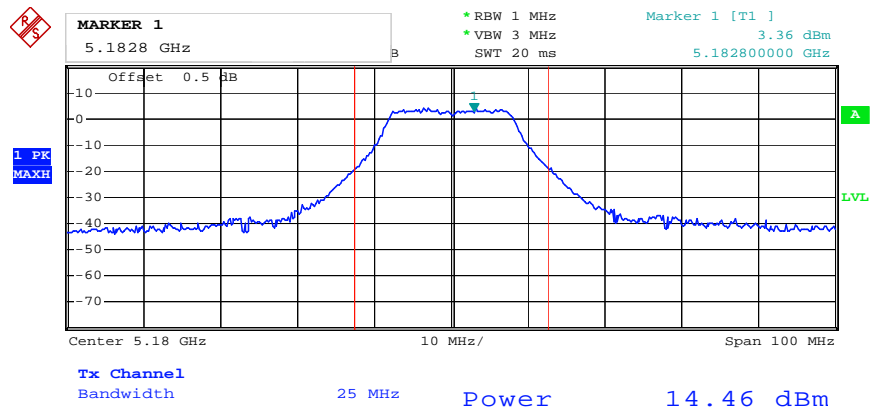


Date: 25.NOV.2009 10:27:42

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. B / 5200 MHz

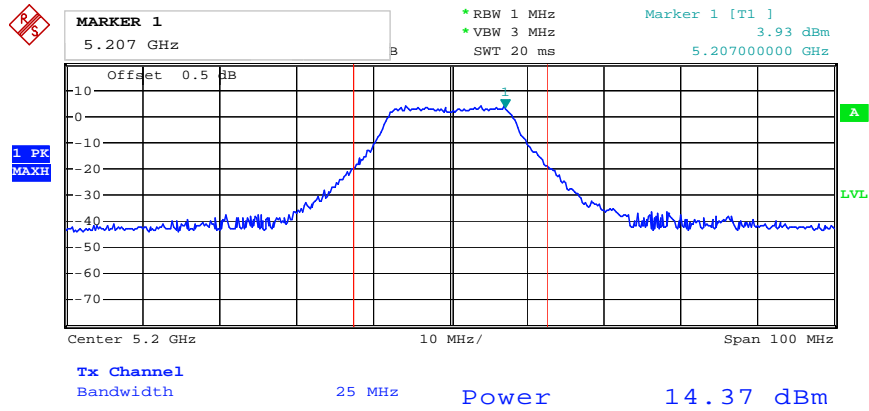


Date: 25.NOV.2009 10:28:48

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. B / 5240 MHz

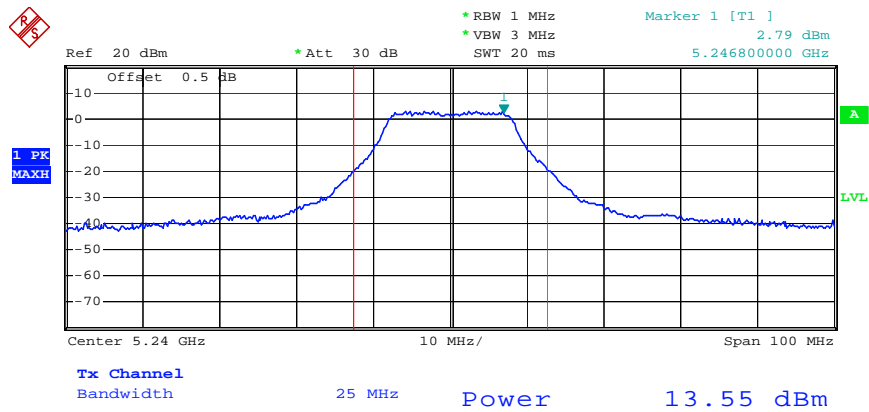


Date: 25.NOV.2009 10:33:35

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. B / 5260 MHz

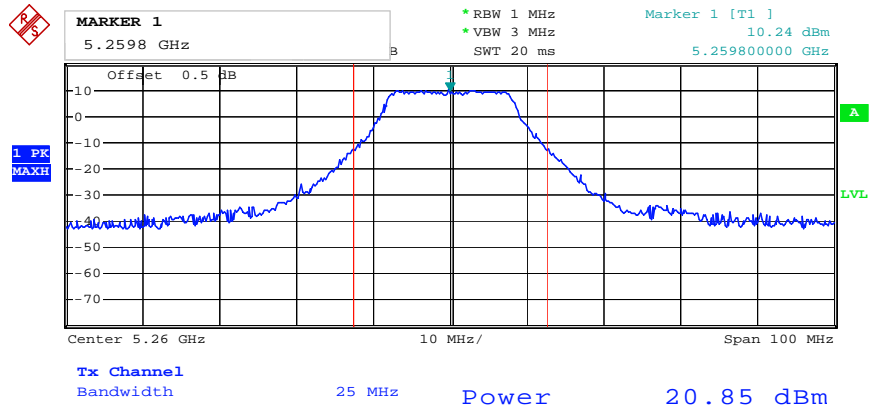


Date: 25.NOV.2009 10:36:59

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. B / 5300 MHz

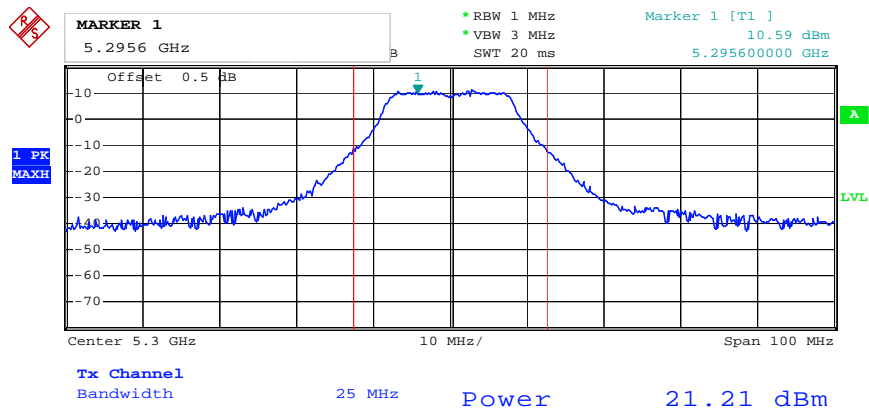


Date: 25.NOV.2009 10:37:49

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. B / 5320 MHz

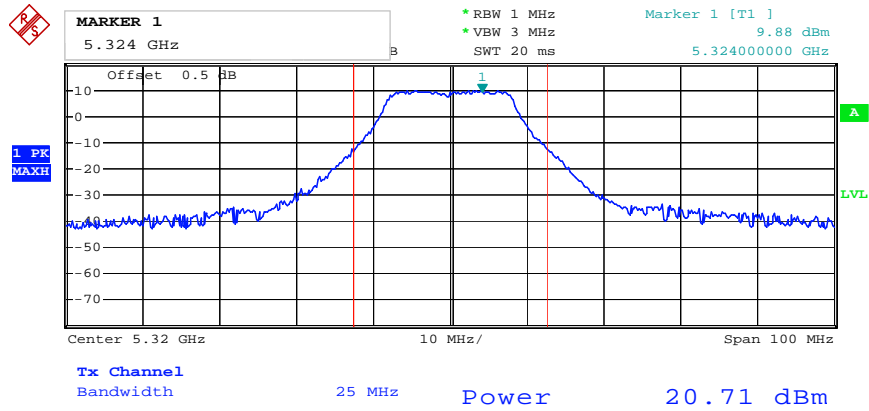


Date: 25.NOV.2009 10:40:15

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. B / 5500 MHz

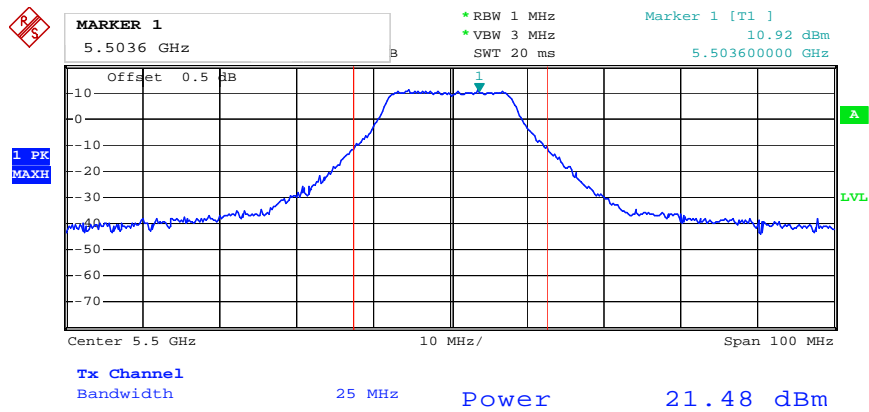


Date: 25.NOV.2009 10:43:40

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. B / 5580 MHz

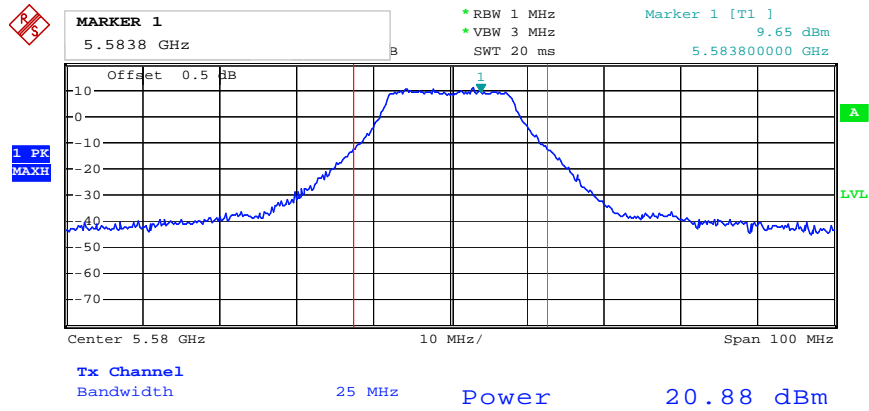

Date: 25.NOV.2009 10:45:04

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. B / 5700 MHz

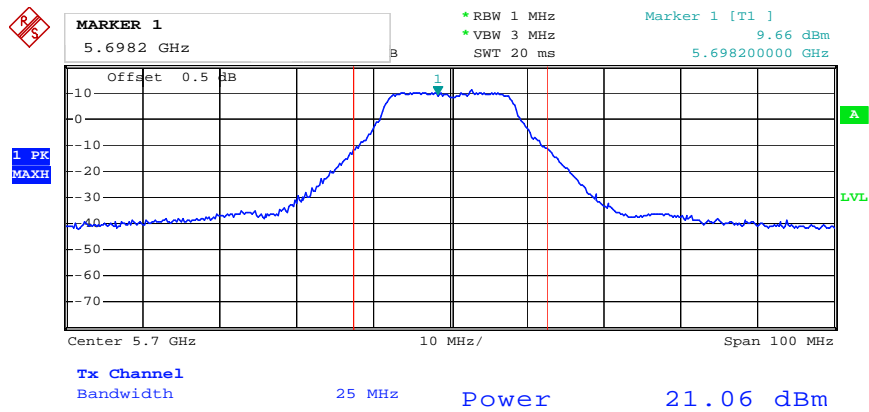

Date: 25.NOV.2009 10:48:37

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4
5.25-5.35 GHz	11
5470-5725	11

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.
3. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.4.4. Test Setup Layout

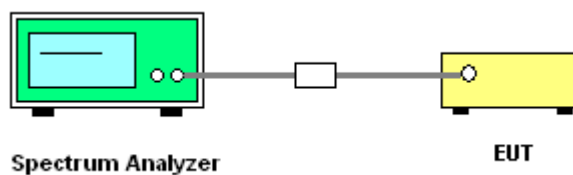

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	23°C	Humidity	56%
Test Engineer	Beck Wu	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	-4.46	4.00	Complies
40	5200 MHz	-4.65	4.00	Complies
48	5240 MHz	-5.23	4.00	Complies
52	5260 MHz	2.22	11.00	Complies
60	5300 MHz	3.20	11.00	Complies
64	5320 MHz	3.04	11.00	Complies
100	5500 MHz	2.63	11.00	Complies
116	5580 MHz	1.34	11.00	Complies
140	5700 MHz	0.77	11.00	Complies

Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	-8.37	4.00	Complies
46	5230 MHz	-8.28	4.00	Complies
54	5270 MHz	-0.60	11.00	Complies
62	5310 MHz	-2.01	11.00	Complies
102	5510MHz	-2.93	11.00	Complies
110	5550 MHz	-2.12	11.00	Complies
134	5670 MHz	-1.45	11.00	Complies

Temperature	23°C	Humidity	56%
Test Engineer	Beck Wu	Configurations	IEEE 802.11a

Configuration IEEE 802.11a Ant. A + Ant. B


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	-5.30	4.00	Complies
40	5200 MHz	-4.42	4.00	Complies
48	5240 MHz	-6.16	4.00	Complies
52	5260 MHz	2.24	11.00	Complies
60	5300 MHz	3.02	11.00	Complies
64	5320 MHz	2.98	11.00	Complies
100	5500 MHz	1.98	11.00	Complies
116	5580 MHz	1.43	11.00	Complies
140	5700 MHz	0.54	11.00	Complies

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5180 MHz

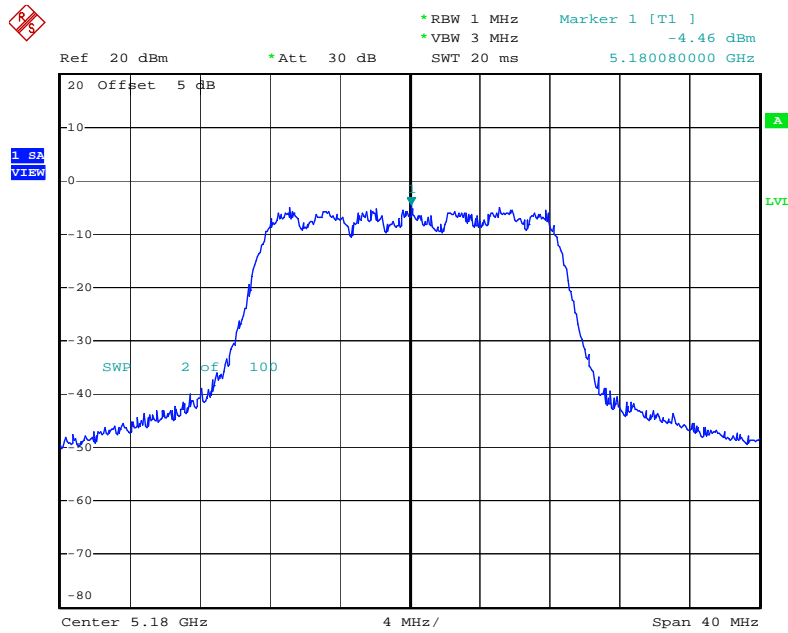


Date: 25.NOV.2009 14:54:08

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5200 MHz

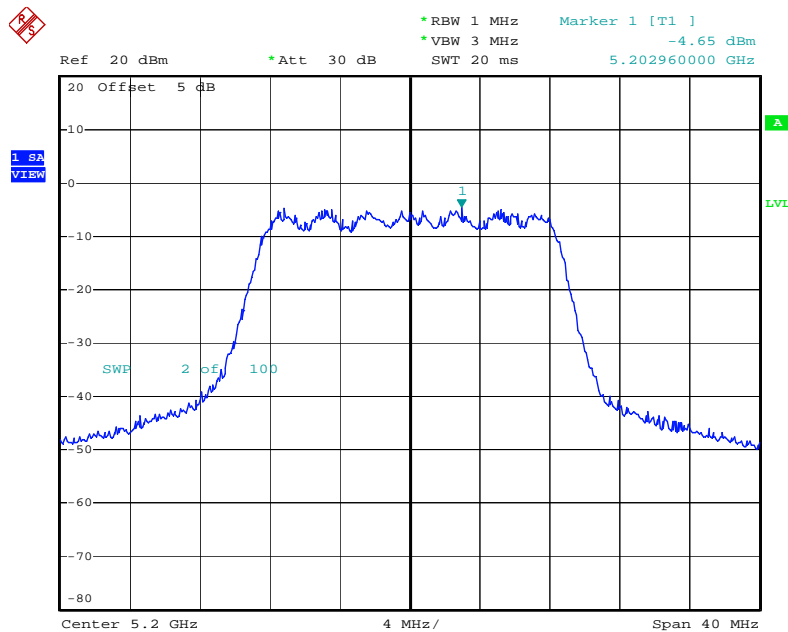


Date: 25.NOV.2009 14:55:19

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5240 MHz

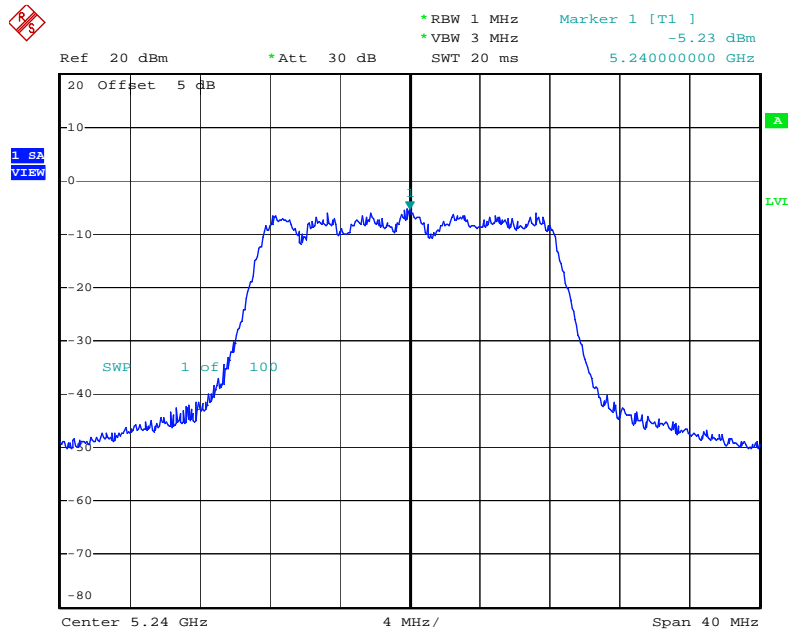


Date: 25.NOV.2009 14:56:14

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5260 MHz

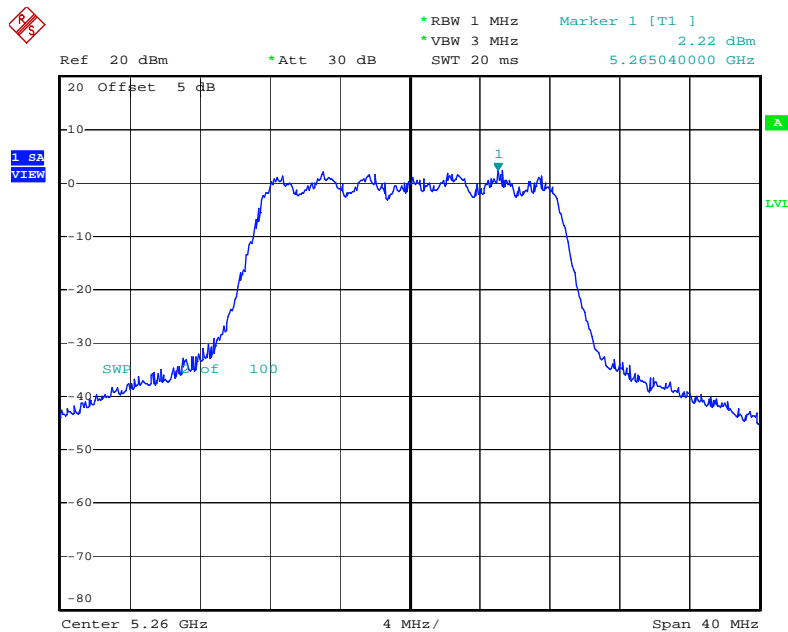


Date: 25.NOV.2009 14:57:18

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5300 MHz

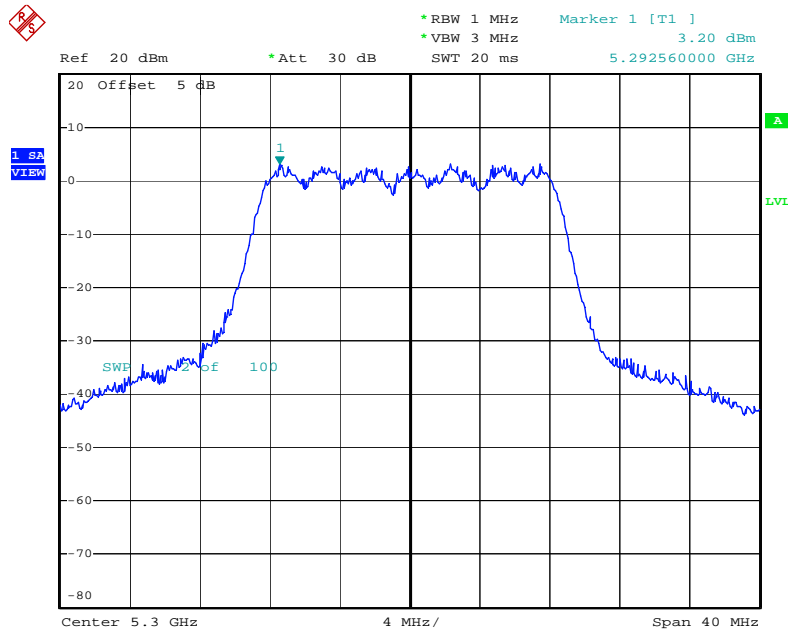


Date: 25.NOV.2009 14:58:15

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5320 MHz

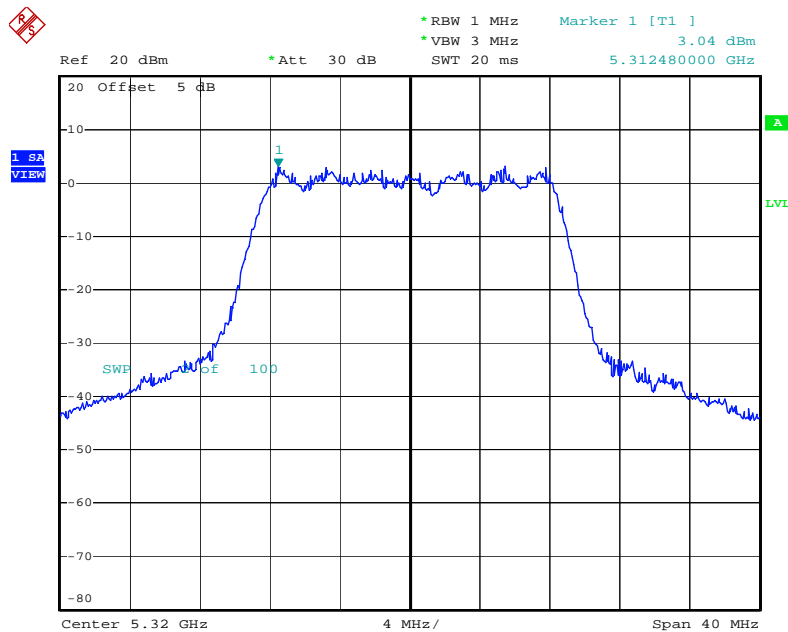


Date: 25.NOV.2009 14:59:05

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5500 MHz

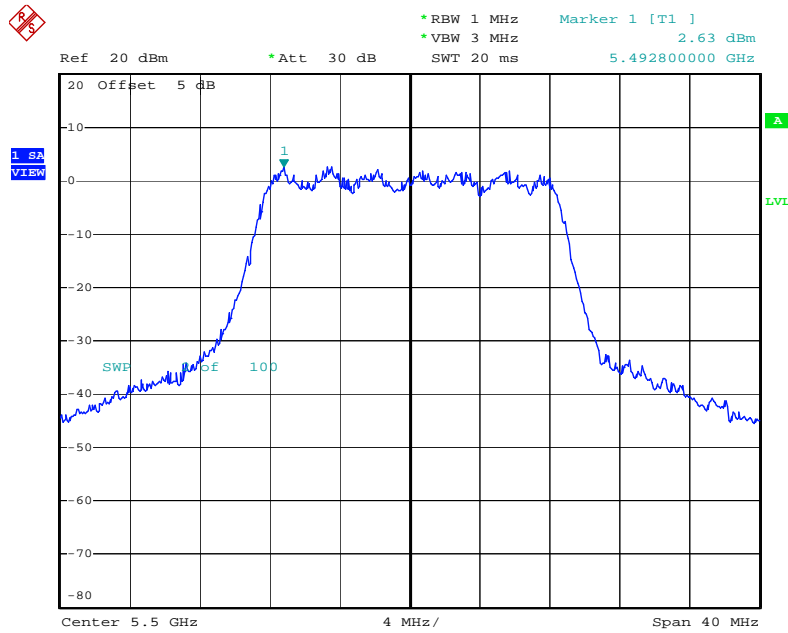


Date: 25.NOV.2009 15:00:07

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5580 MHz

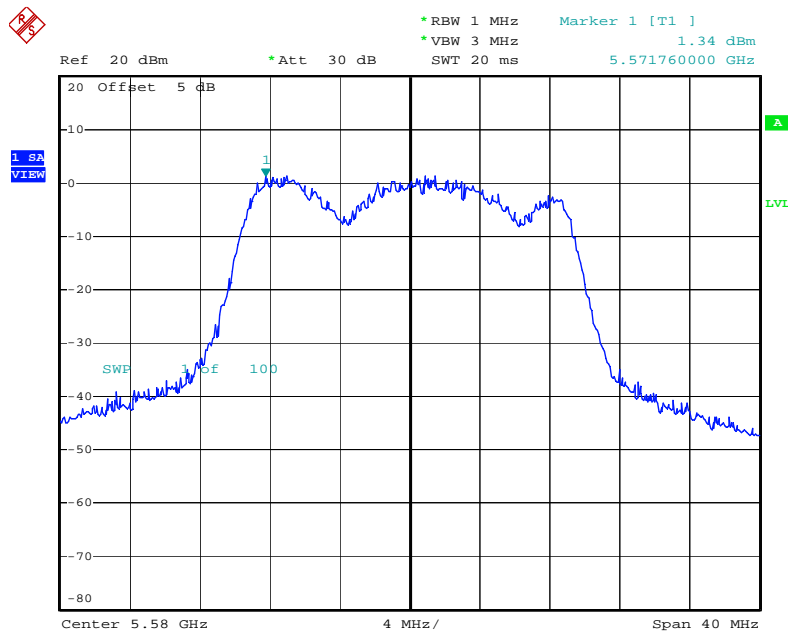


Date: 25.NOV.2009 15:02:50

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5700 MHz

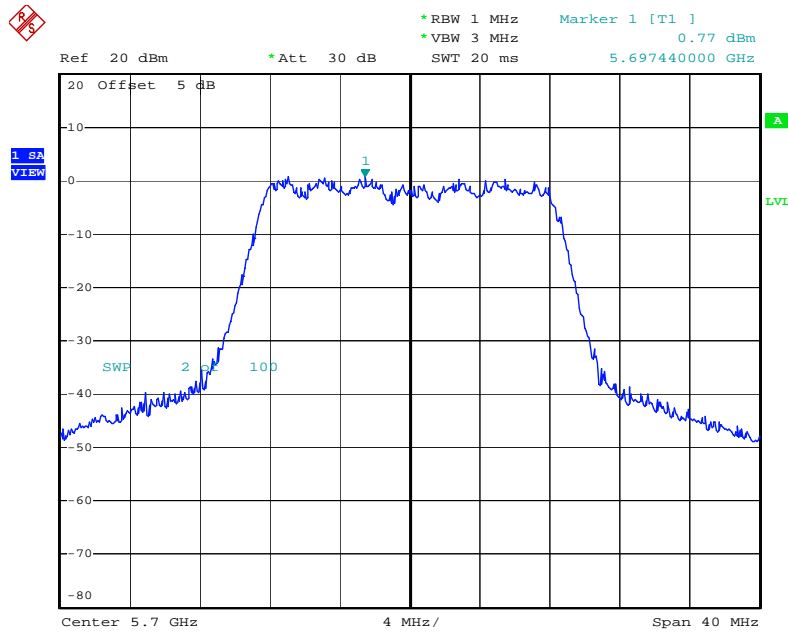


Date: 25.NOV.2009 15:01:26

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5190 MHz

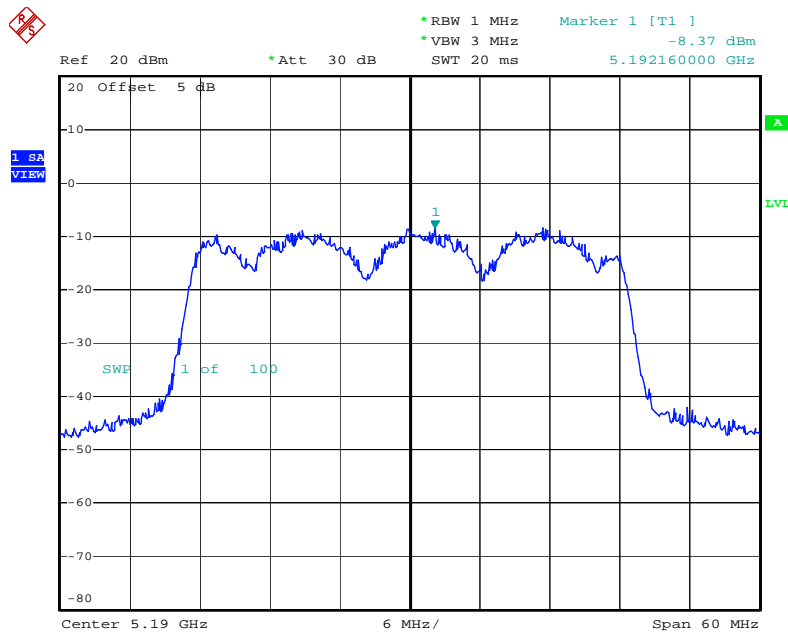


Date: 25.NOV.2009 15:36:41

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5230 MHz

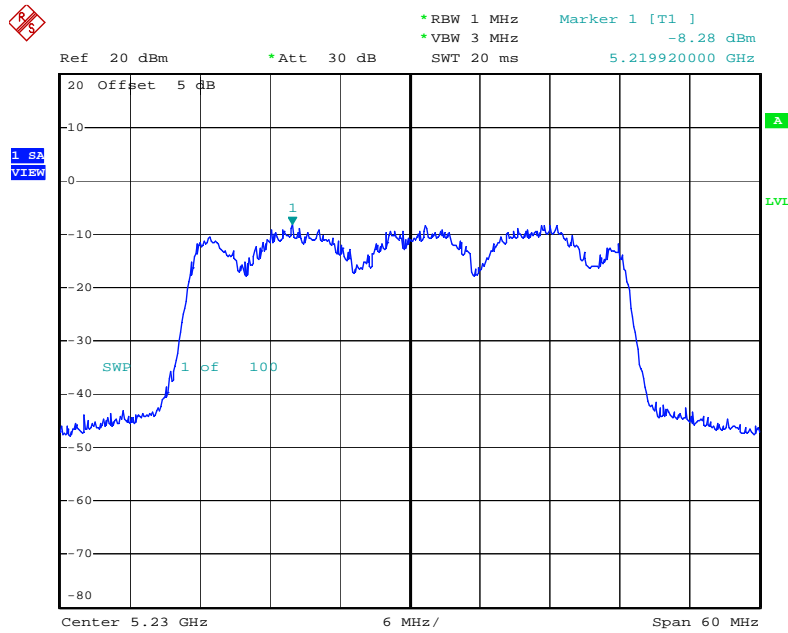


Date: 25.NOV.2009 15:38:04

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5270 MHz

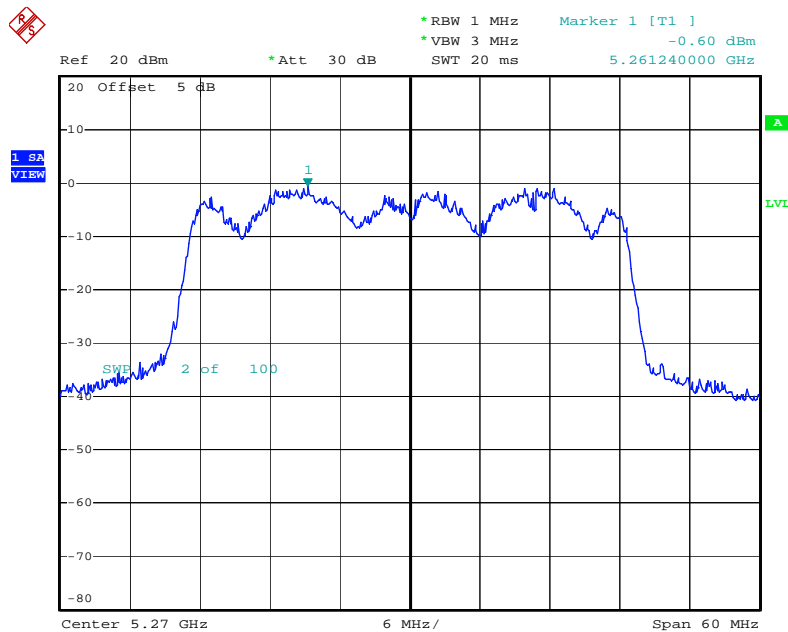


Date: 25.NOV.2009 15:39:20

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5310 MHz

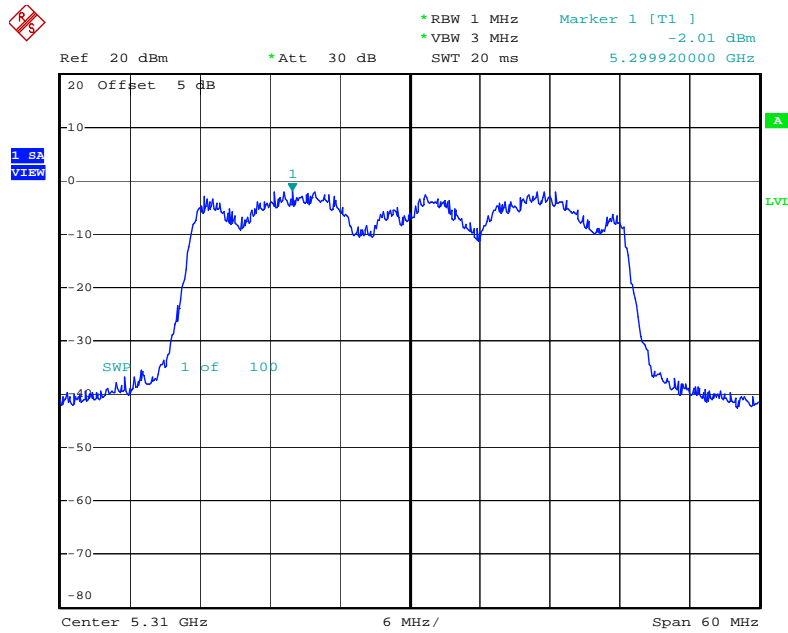


Date: 25.NOV.2009 15:42:05

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5510MHz

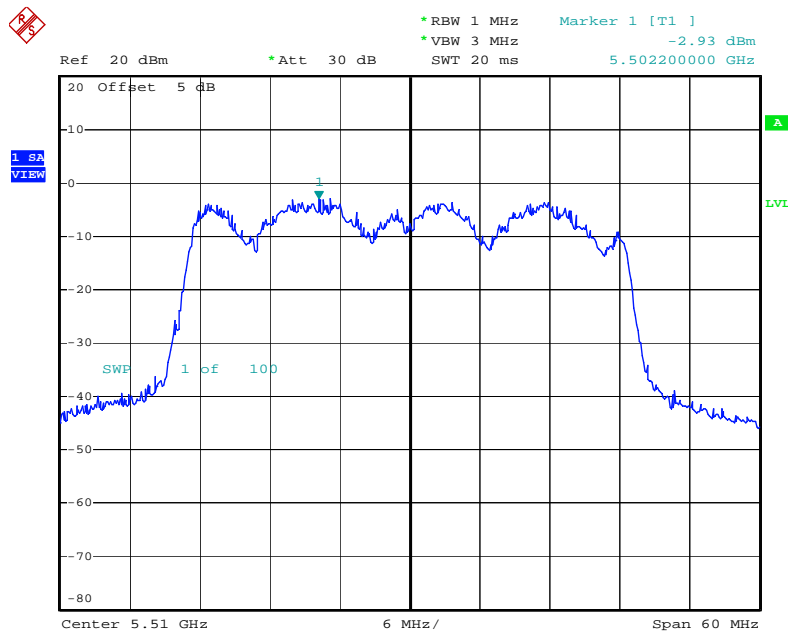


Date: 25.NOV.2009 15:43:33

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5550 MHz

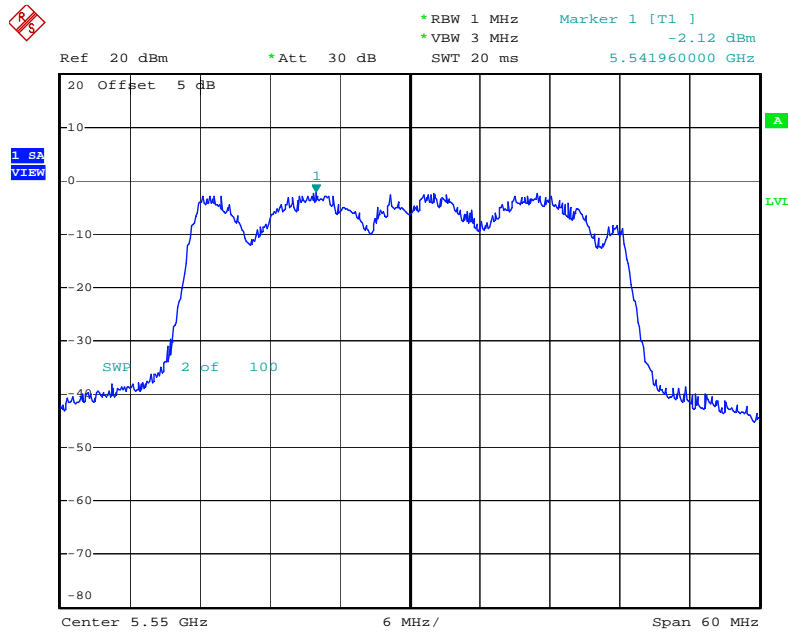


Date: 25.NOV.2009 15:44:53

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5670 MHz

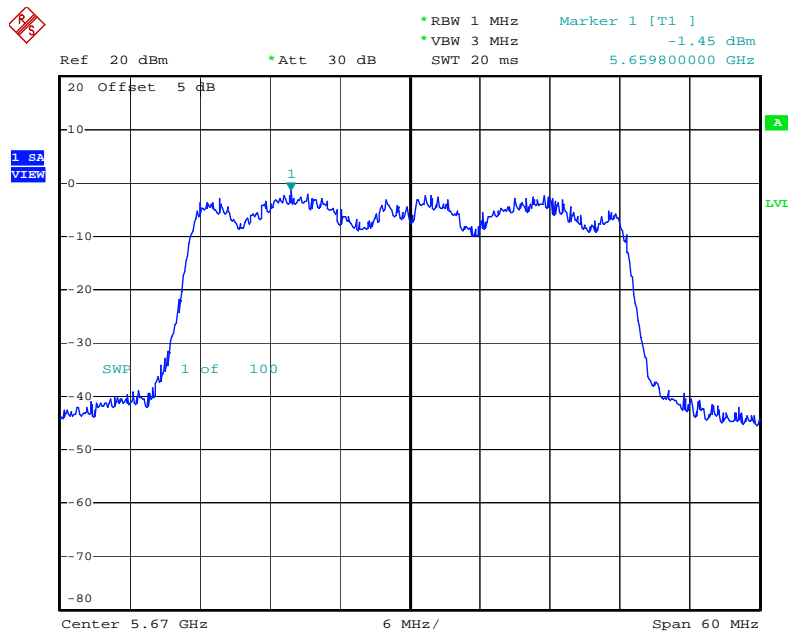


Date: 25.NOV.2009 15:46:00

Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5180 MHz

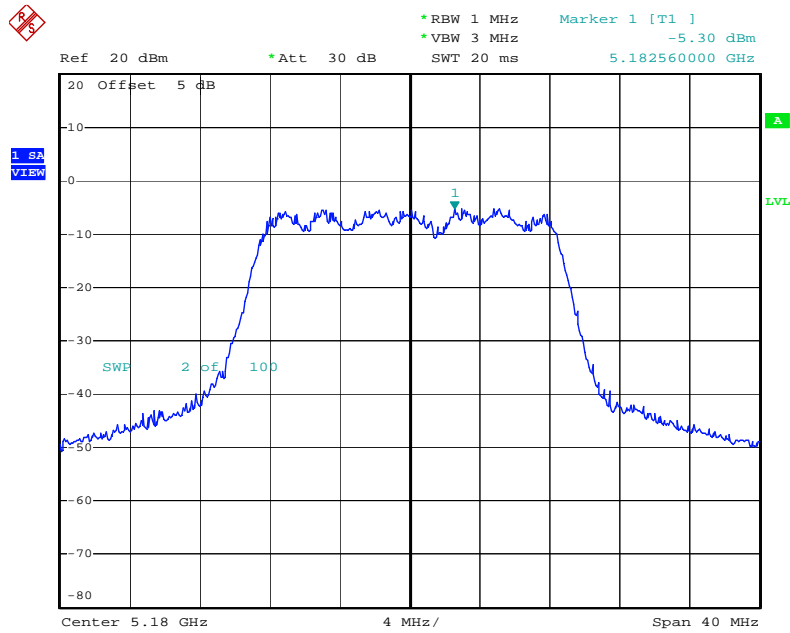


Date: 25.NOV.2009 15:27:03

Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5200 MHz

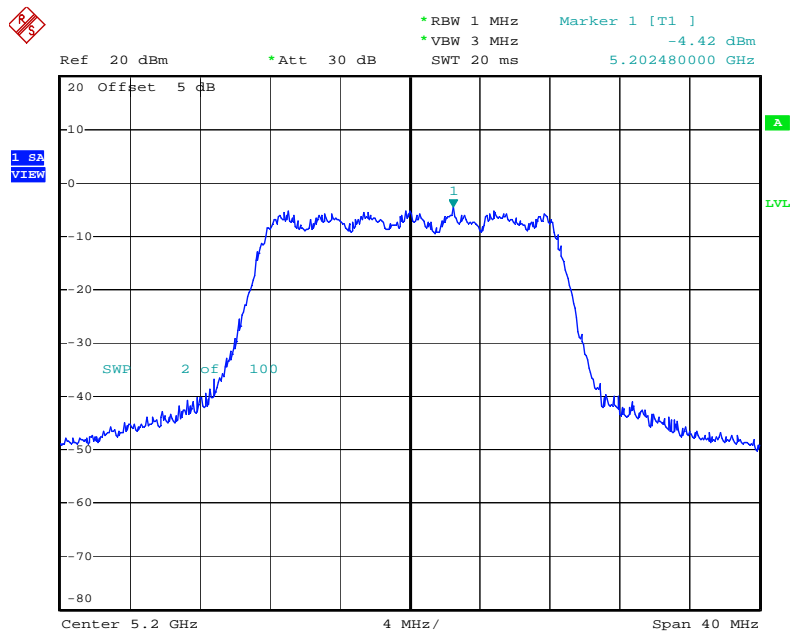


Date: 25.NOV.2009 15:26:04

Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5240 MHz

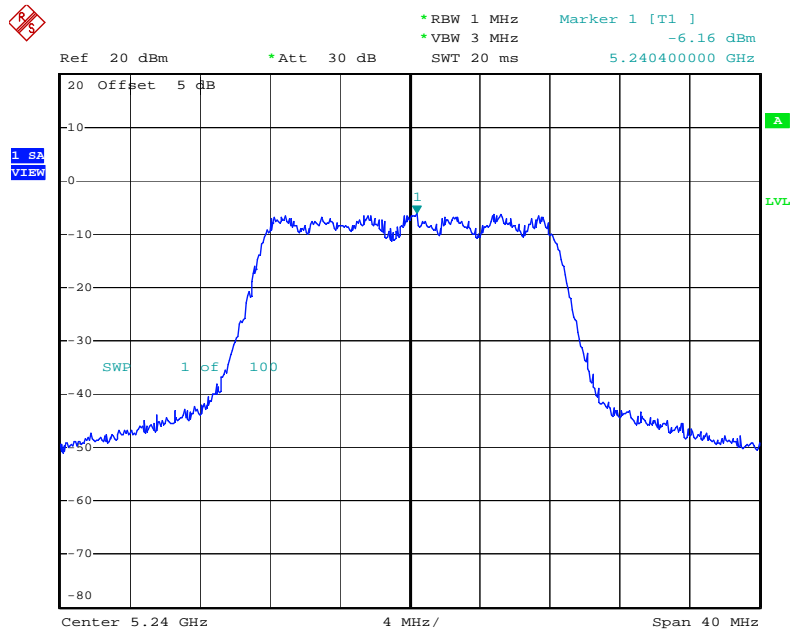


Date: 25.NOV.2009 15:25:12

Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5260 MHz

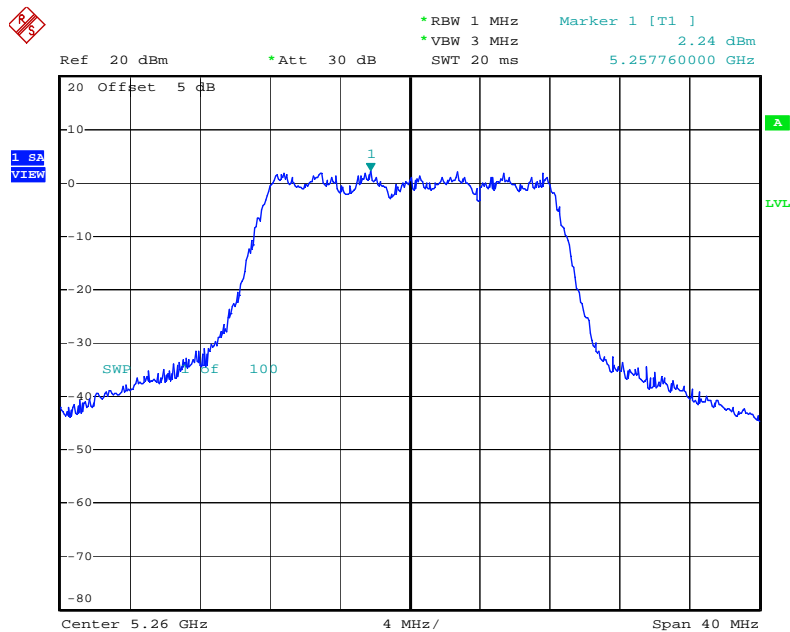


Date: 25.NOV.2009 15:24:07

Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5300 MHz

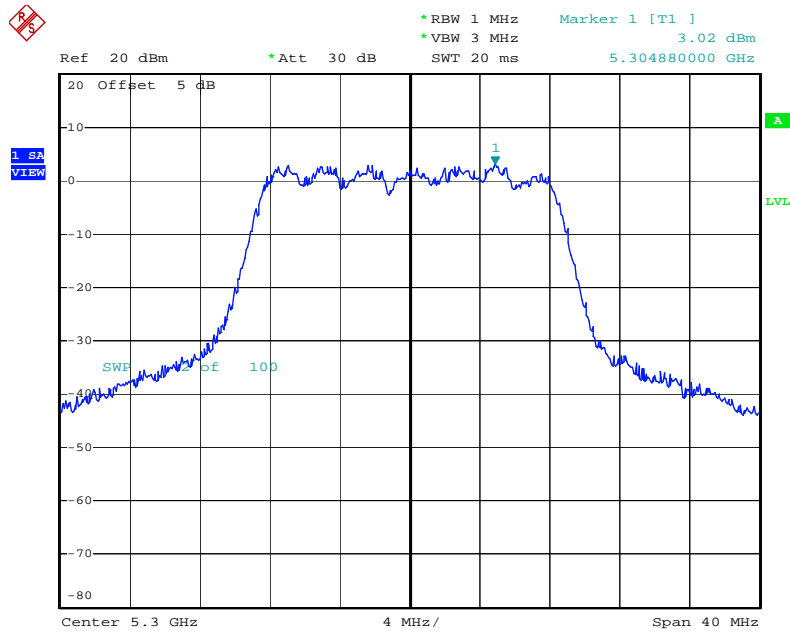


Date: 25.NOV.2009 15:22:51

Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5320 MHz

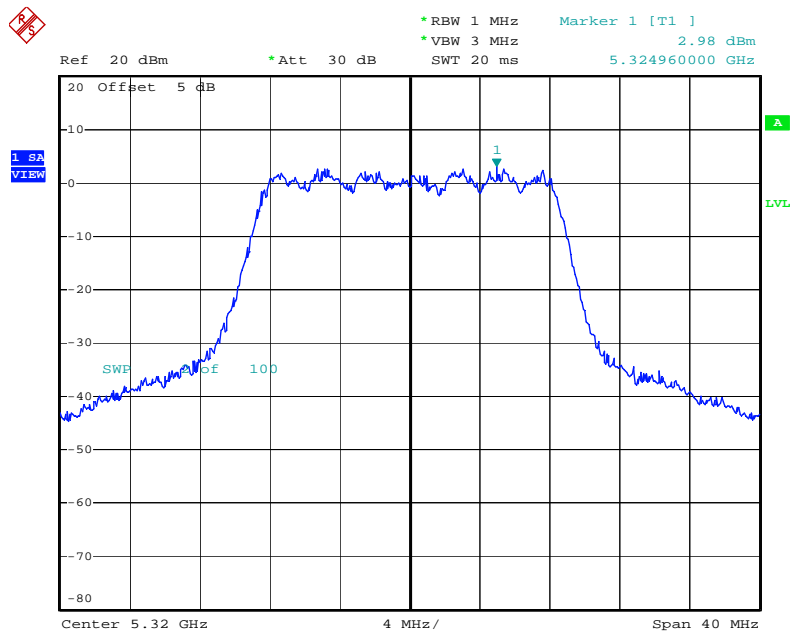


Date: 25.NOV.2009 15:21:54

Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5500 MHz

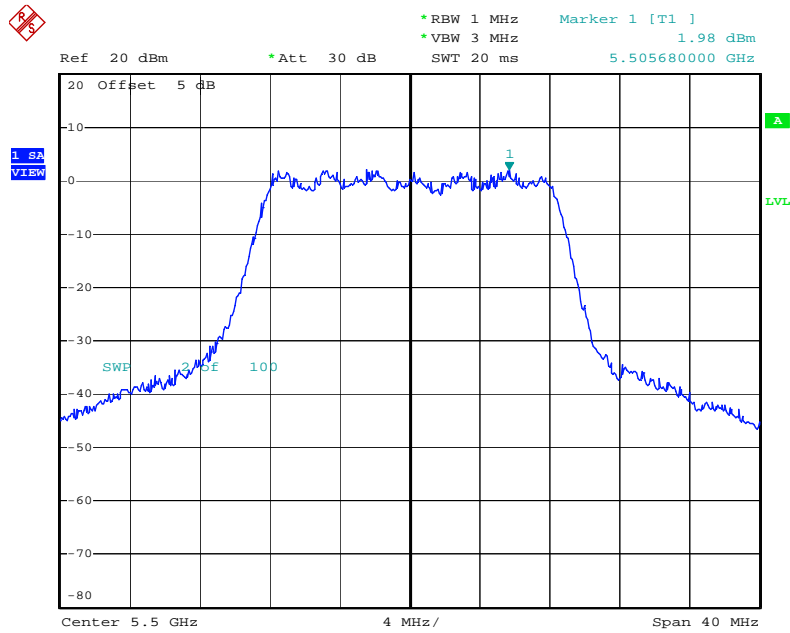


Date: 25.NOV.2009 15:20:53

Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5580 MHz

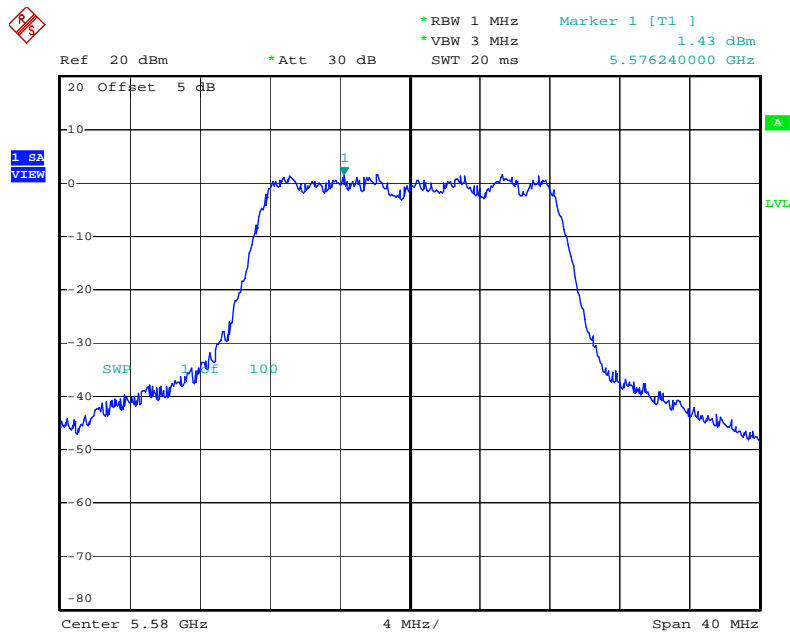

Date: 25.NOV.2009 15:15:29

Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5700 MHz

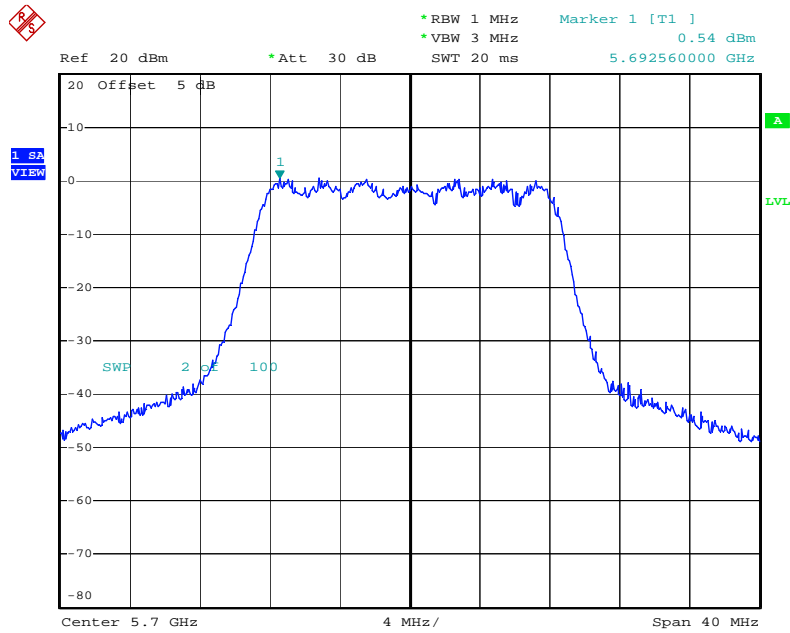

Date: 25.NOV.2009 15:18:38

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be ≤ 13 dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold--and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to "free run". Set RBW = 1 MHz. Set VBW $\geq 1/T$ (IEEE 802.11n VBW = 300kHz $\geq 1/4\mu$ s). Use sample detector mode if bin width (i.e., span/number of points in spectrum) < 0.5 RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.
5. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

4.5.4. Test Setup Layout

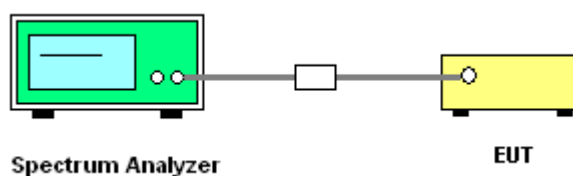

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	23°C	Humidity	56%
Test Engineer	Beck Wu	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	4.43	13	Complies
40	5200 MHz	5.02	13	Complies
48	5240 MHz	4.52	13	Complies
52	5260 MHz	5.40	13	Complies
60	5300 MHz	5.30	13	Complies
64	5320 MHz	4.94	13	Complies
100	5500 MHz	4.74	13	Complies
116	5580 MHz	5.15	13	Complies
140	5700 MHz	4.97	13	Complies

Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B


Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
38	5190 MHz	4.93	13	Complies
46	5230 MHz	5.49	13	Complies
54	5270 MHz	5.60	13	Complies
62	5310 MHz	5.74	13	Complies
102	5510MHz	5.15	13	Complies
110	5550 MHz	5.05	13	Complies
134	5670 MHz	6.59	13	Complies

Temperature	23°C	Humidity	56%
Test Engineer	Beck Wu	Configurations	IEEE 802.11a

Configuration IEEE 802.11a Ant. A + Ant. B


Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	5.12	13	Complies
40	5200 MHz	4.04	13	Complies
48	5240 MHz	5.59	13	Complies
52	5260 MHz	4.69	13	Complies
60	5300 MHz	5.37	13	Complies
64	5320 MHz	4.87	13	Complies
100	5500 MHz	5.17	13	Complies
116	5580 MHz	5.64	13	Complies
140	5700 MHz	5.00	13	Complies

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5180 MHz

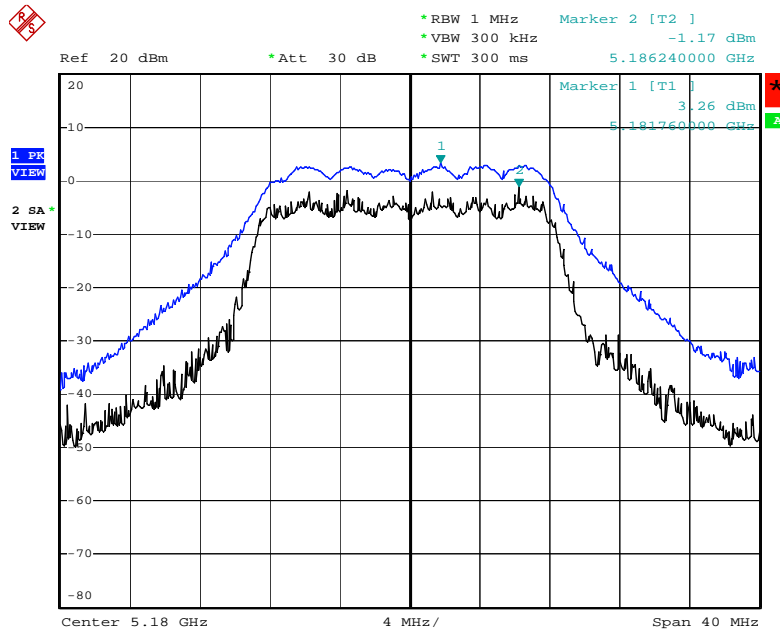


Date: 25.NOV.2009 14:54:29

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5200 MHz

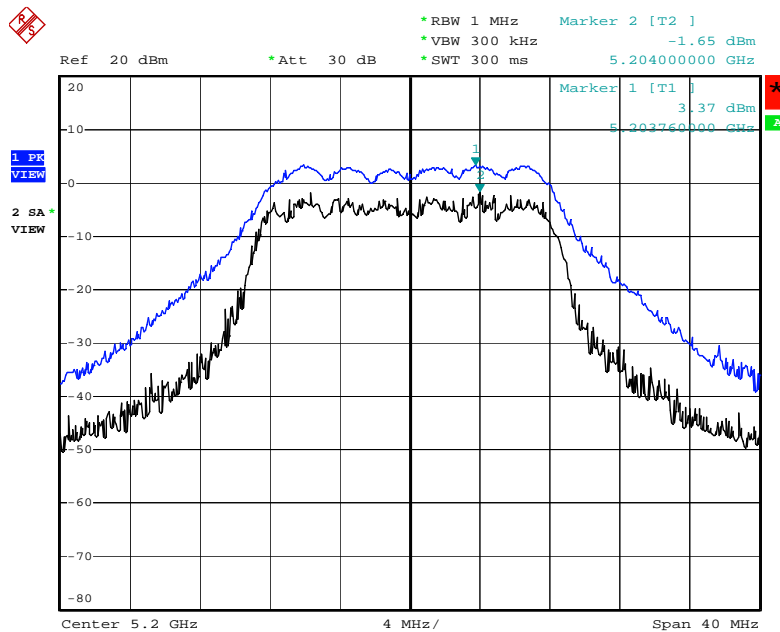


Date: 25.NOV.2009 14:55:39

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5240 MHz

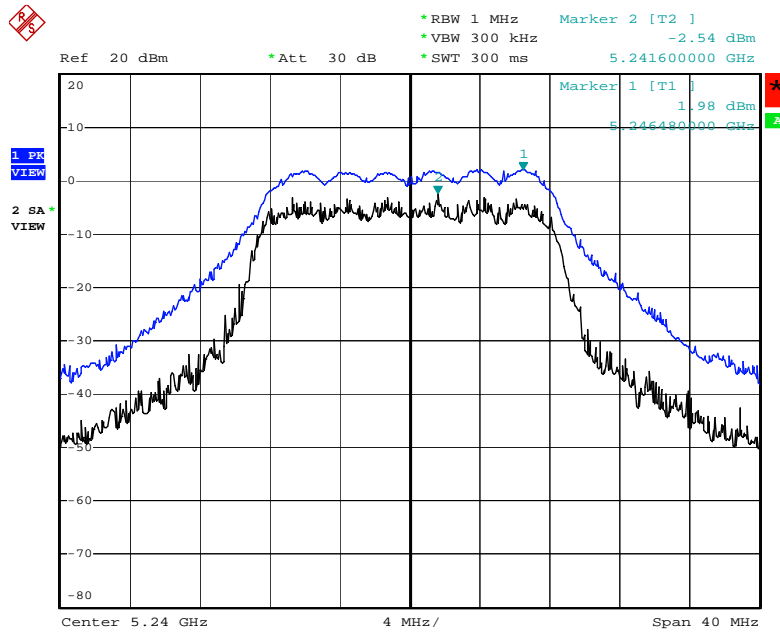


Date: 25.NOV.2009 14:56:35

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5260 MHz

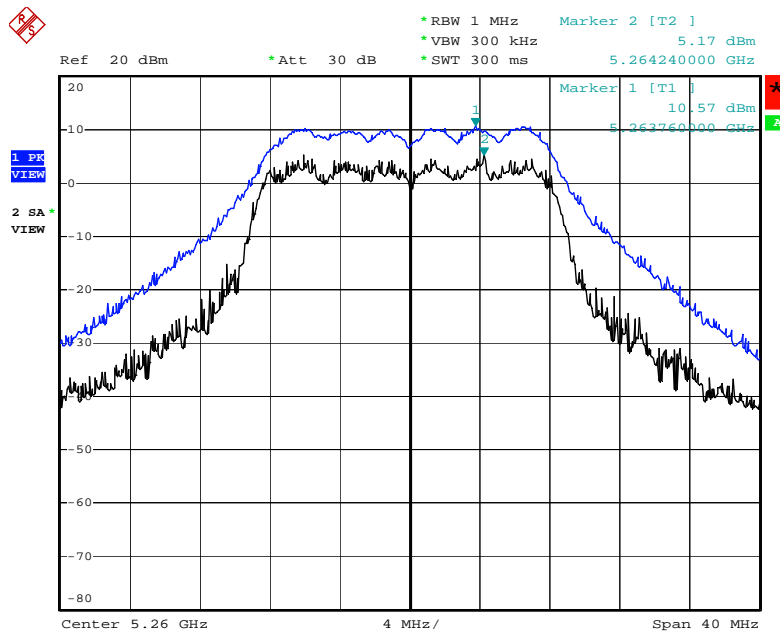


Date: 25.NOV.2009 14:57:39

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5300 MHz

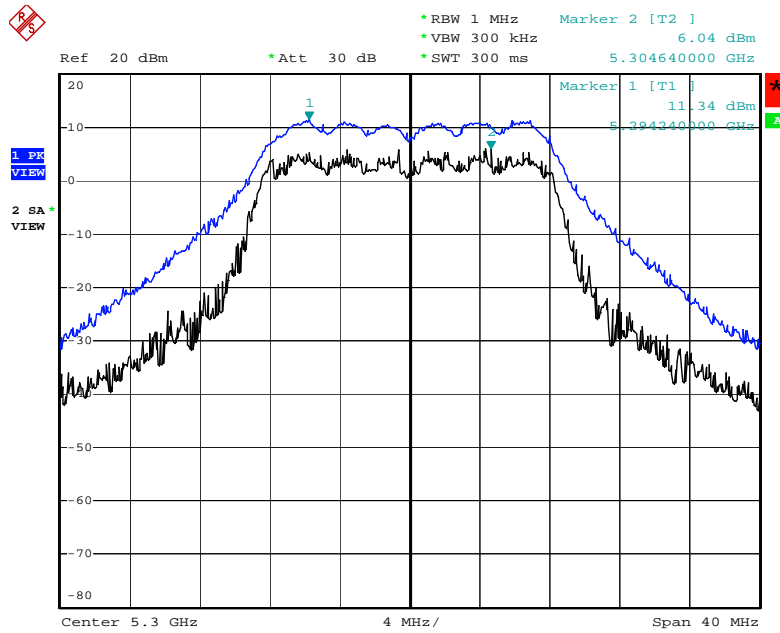


Date: 25.NOV.2009 14:58:36

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5320 MHz

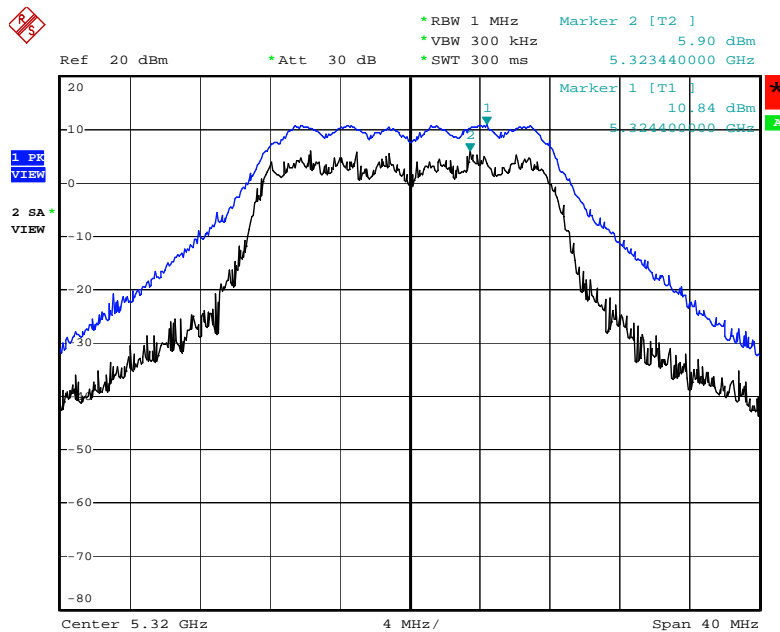


Date: 25.NOV.2009 14:59:26

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5500 MHz

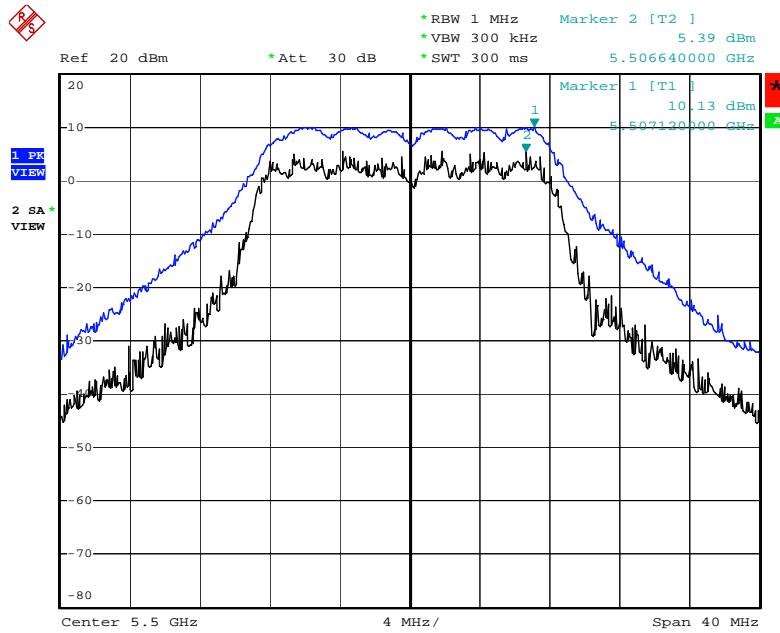


Date: 25.NOV.2009 15:00:29

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5580 MHz

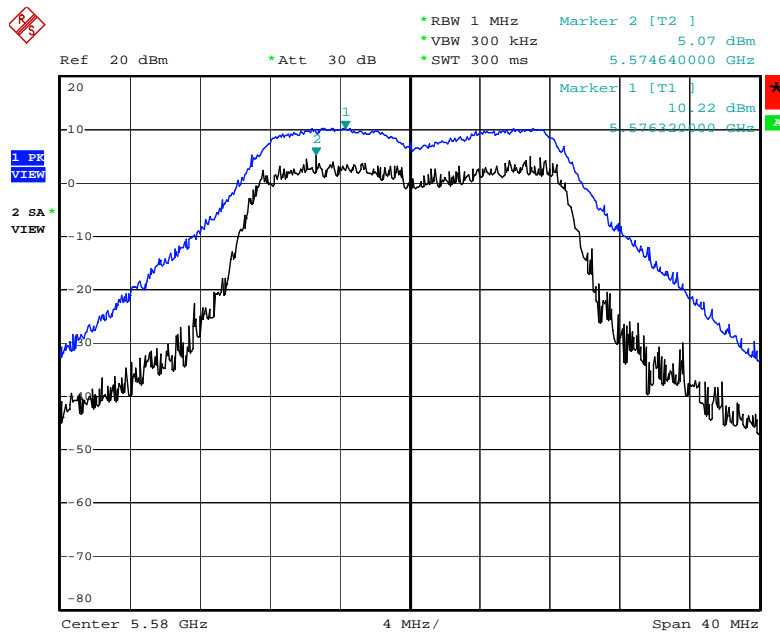


Date: 25.NOV.2009 15:03:12

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A + Ant. B / 5700 MHz

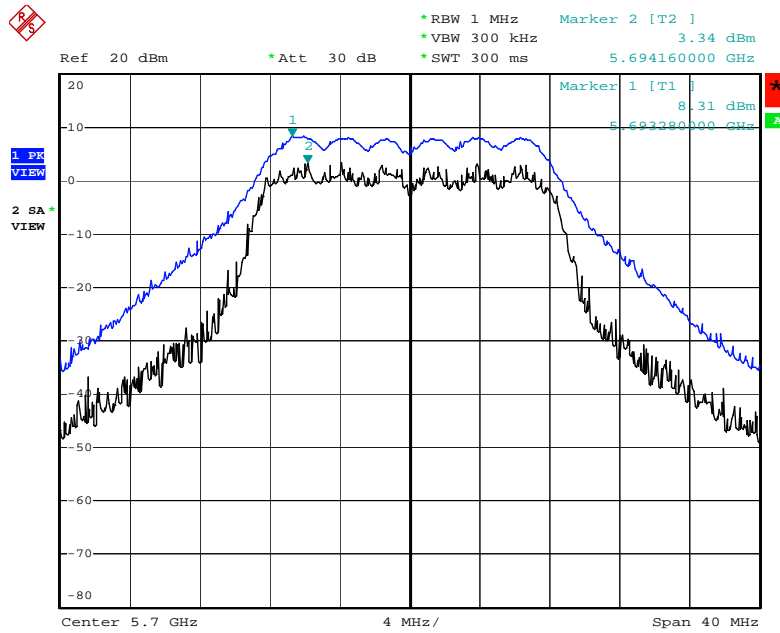


Date: 25.NOV.2009 15:01:48

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5190 MHz

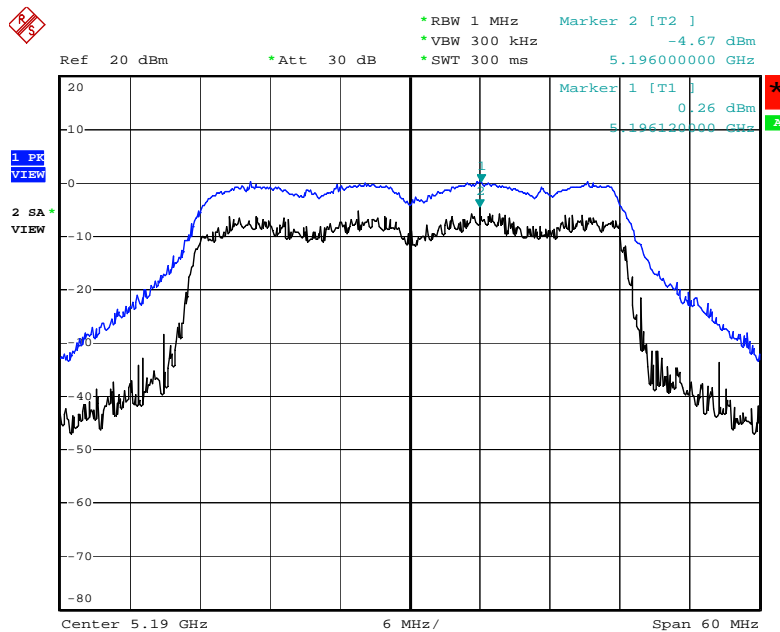


Date: 25.NOV.2009 15:37:02

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5230 MHz

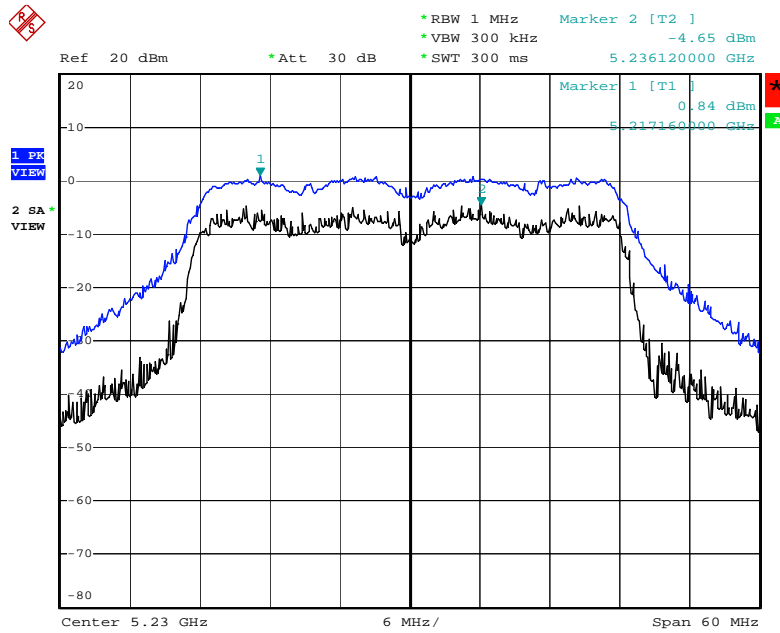


Date: 25.NOV.2009 15:38:24

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5270 MHz

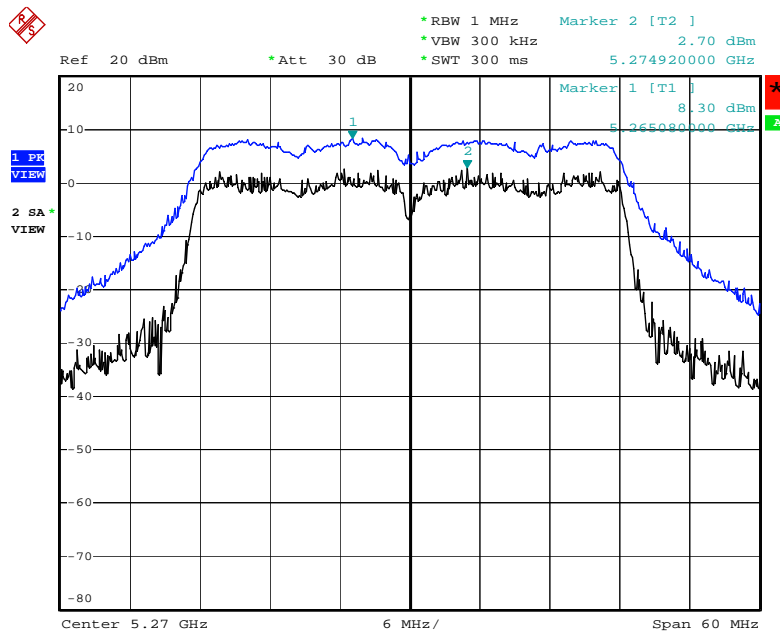


Date: 25.NOV.2009 15:39:41

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5310 MHz

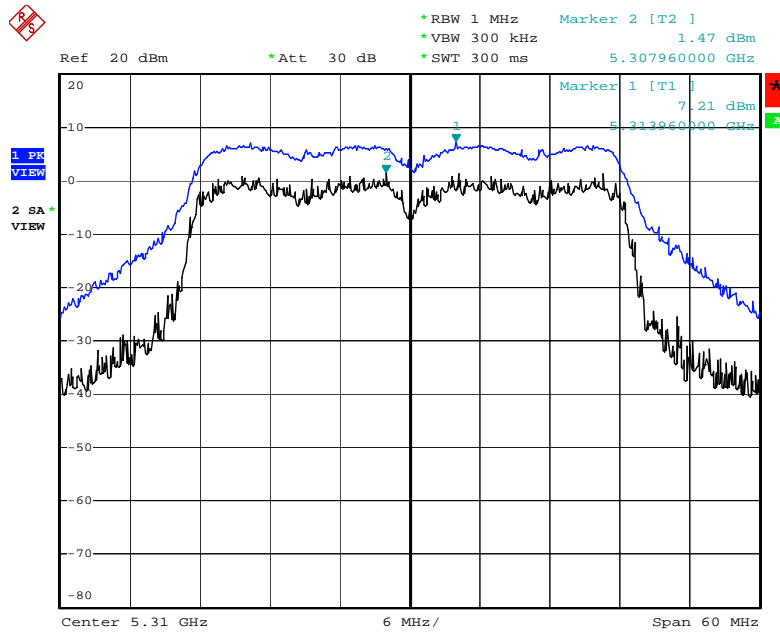


Date: 25.NOV.2009 15:42:26

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5510MHz

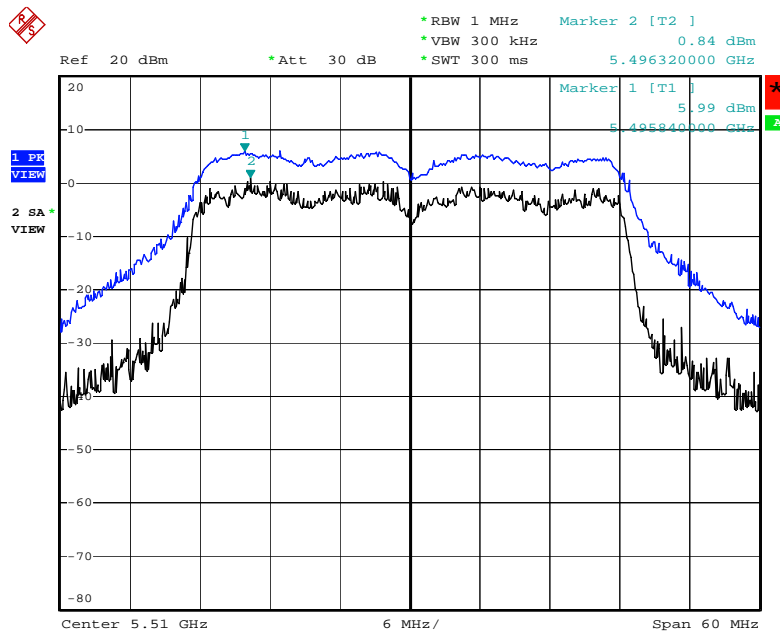


Date: 25.NOV.2009 15:43:54

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5550 MHz

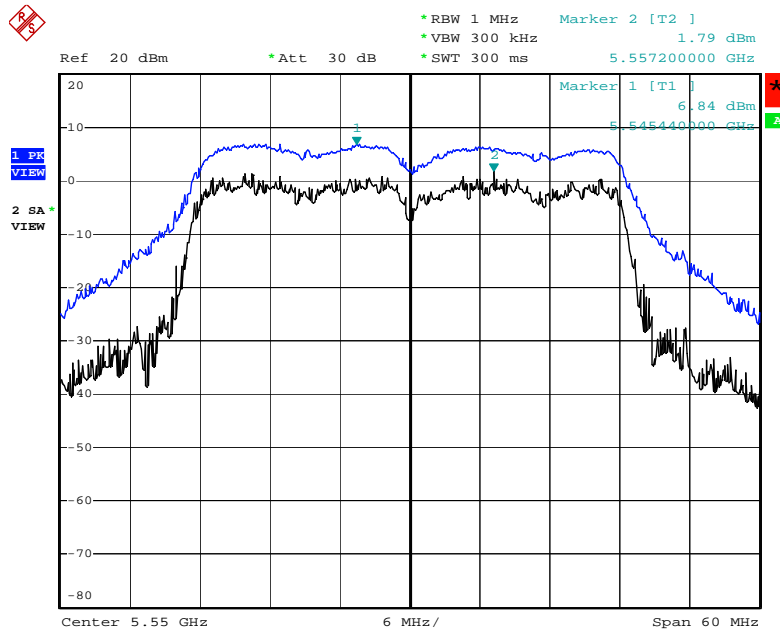


Date: 25.NOV.2009 15:45:14

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A + Ant. B / 5670 MHz

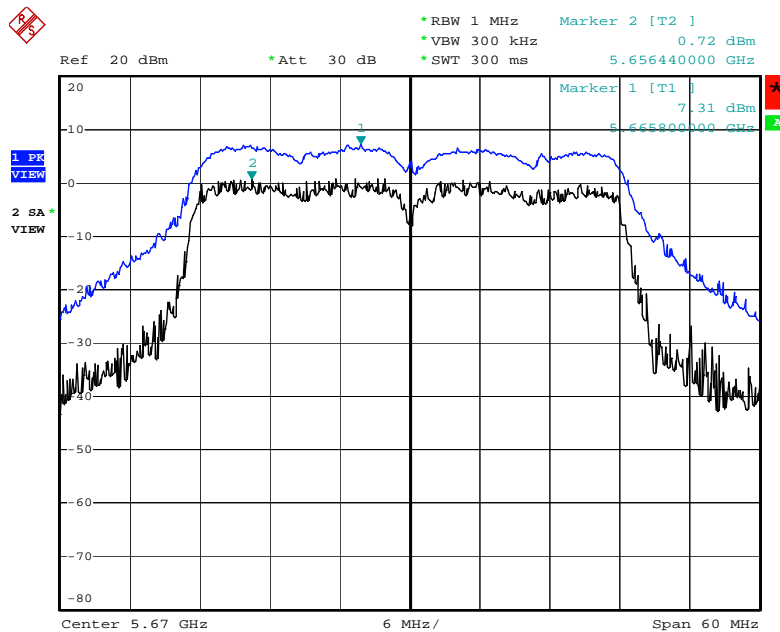


Date: 25.NOV.2009 15:46:21

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5180 MHz

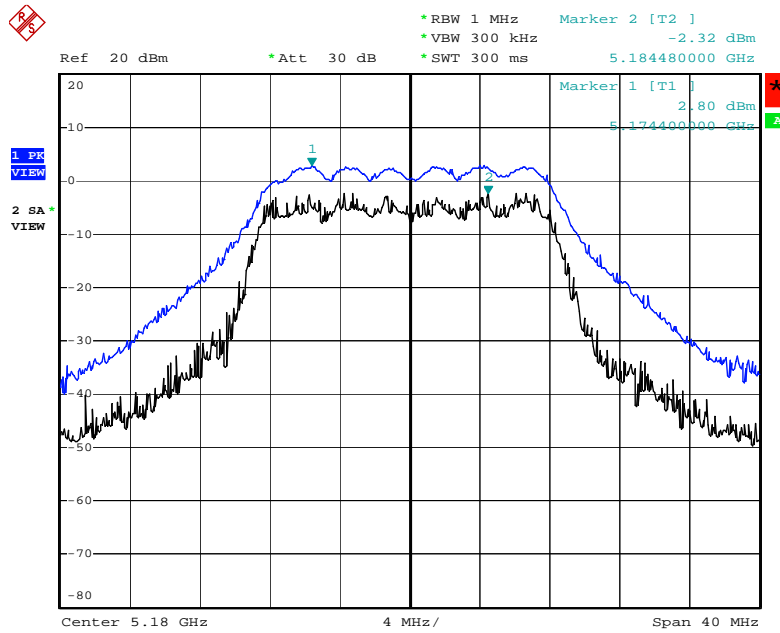


Date: 25.NOV.2009 15:27:24

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5200 MHz

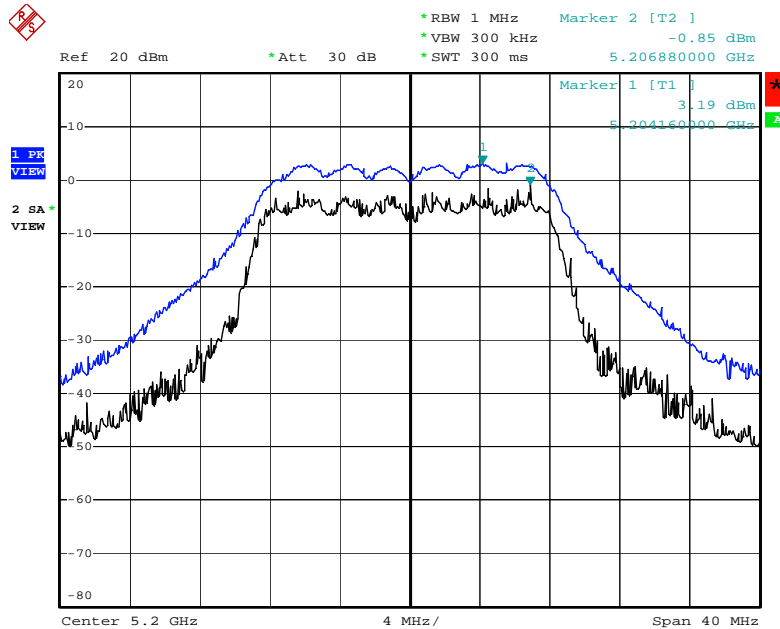


Date: 25.NOV.2009 15:26:25

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5240 MHz

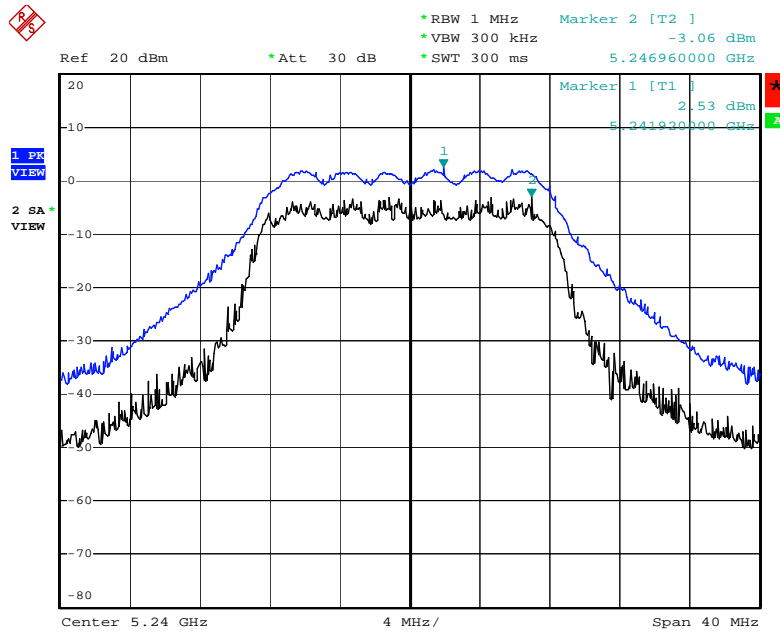


Date: 25.NOV.2009 15:25:33

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5260 MHz

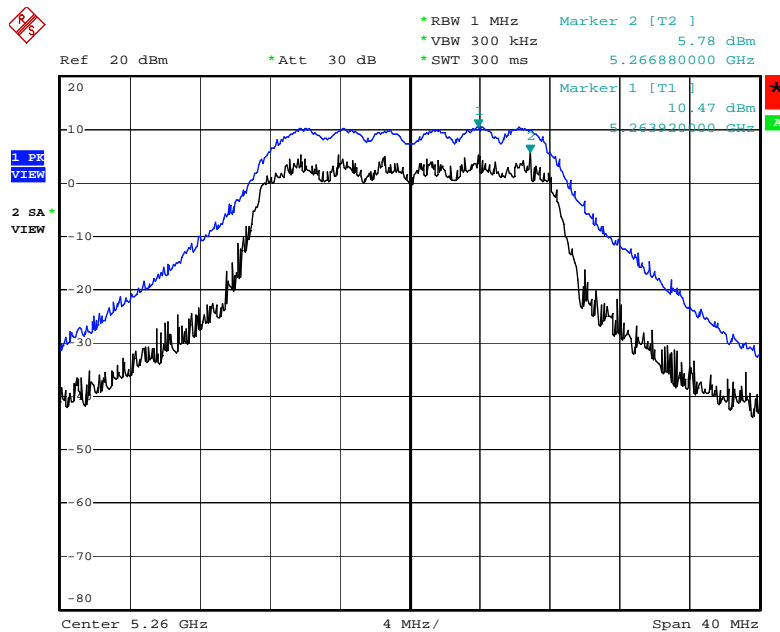


Date: 25.NOV.2009 15:24:28

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5300 MHz

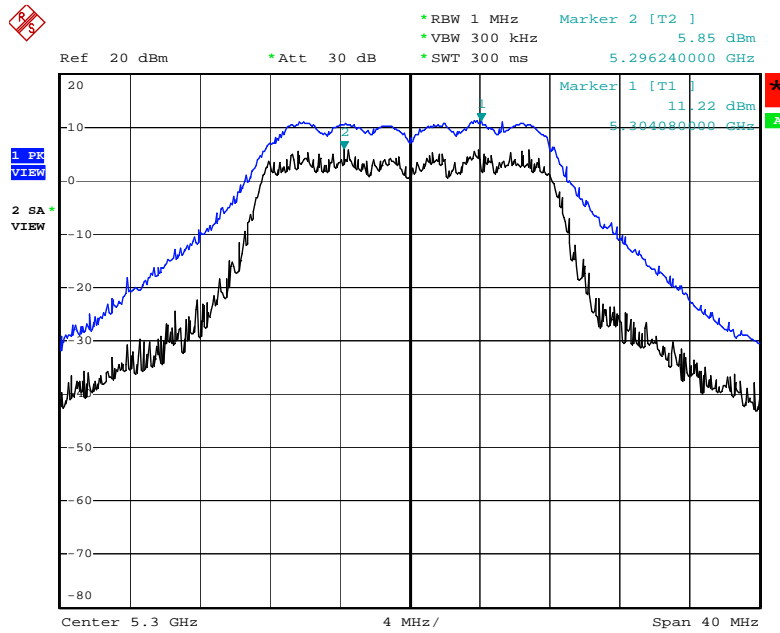


Date: 25.NOV.2009 15:23:12

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5320 MHz

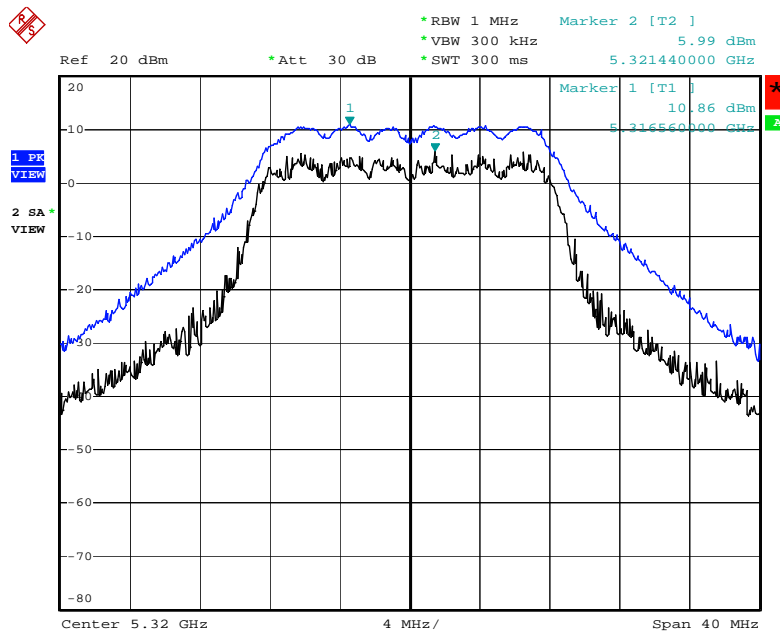


Date: 25.NOV.2009 15:22:15

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5500 MHz

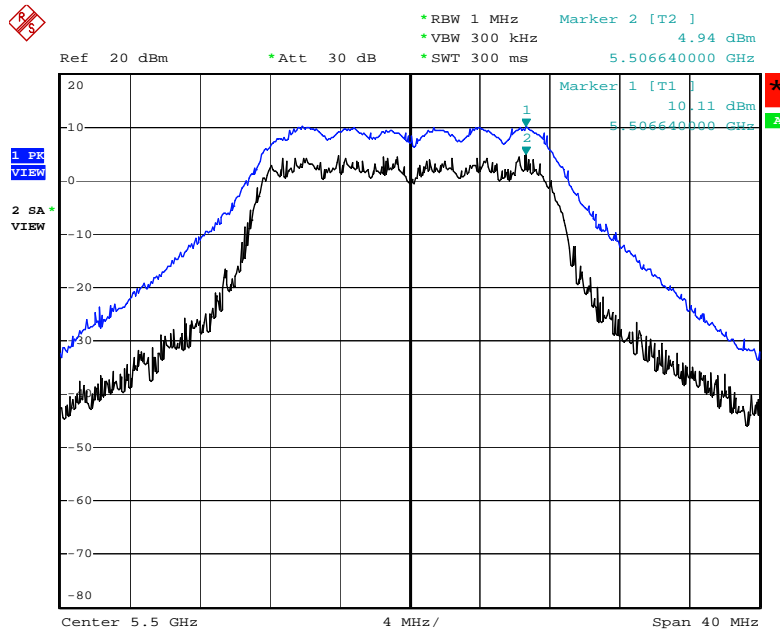


Date: 25.NOV.2009 15:21:15

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5580 MHz

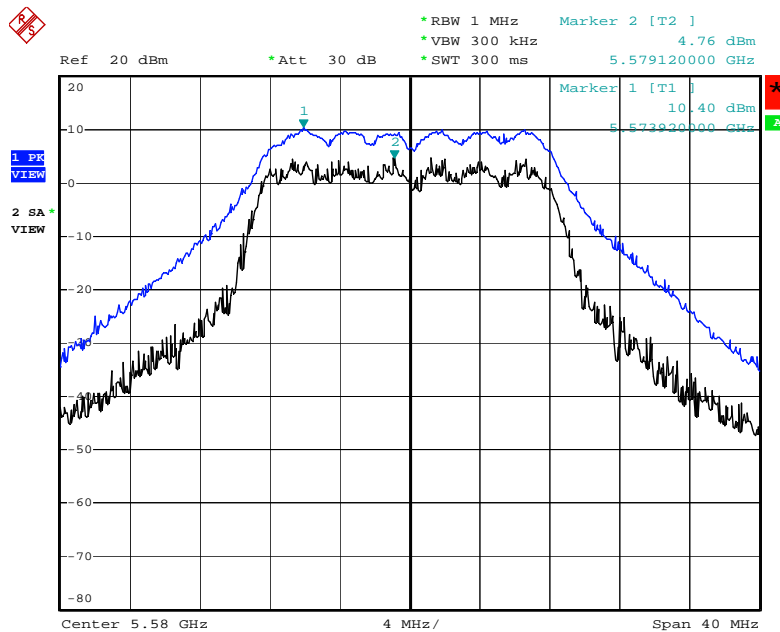

Date: 25.NOV.2009 15:15:51

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5700 MHz

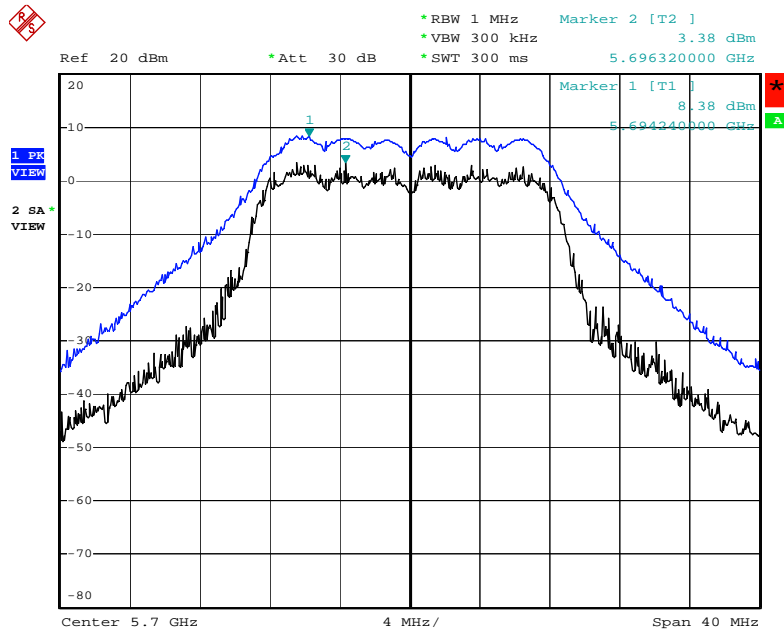

Date: 25.NOV.2009 15:19:00

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, in case the emission falls within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 30MHz

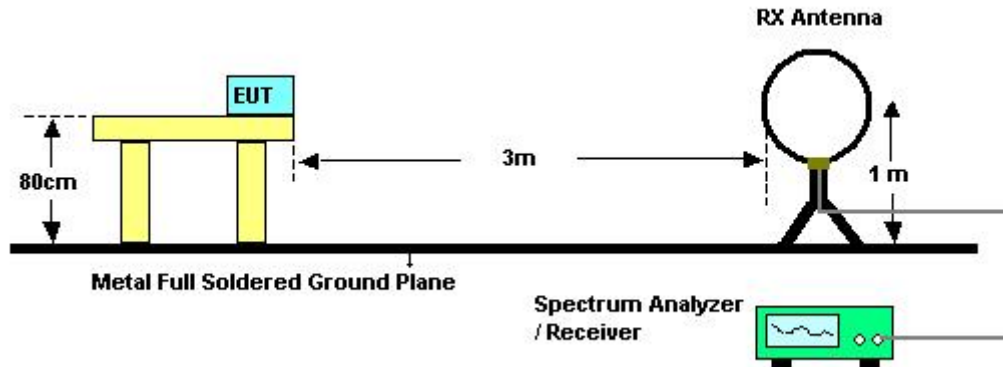

For radiated emissions above 30MHz

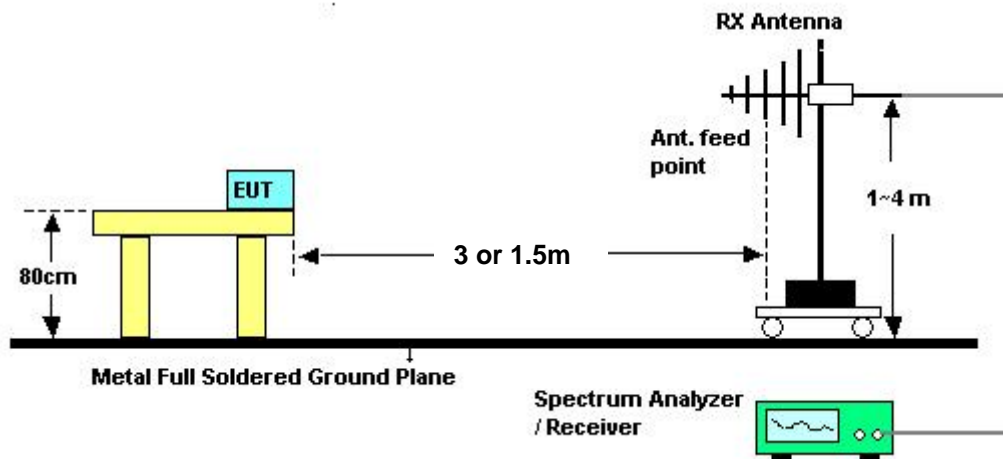

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang		
Evaluating Date	Nov. 24, 2009		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	Normal Link

Horizontal

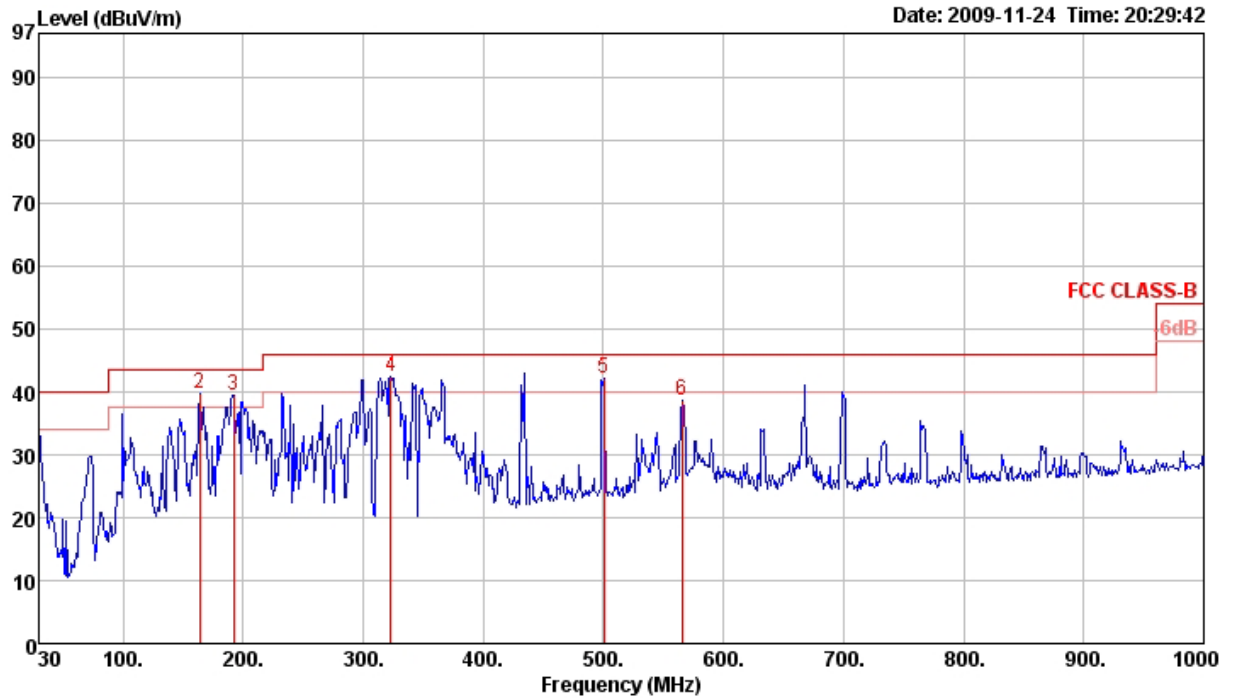

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	30.00	33.75	40.00	-6.25	42.29	0.50	27.80	18.76	0	100	Peak	HORIZONTAL
2 !	163.86	39.62	43.50	-3.88	53.06	1.52	27.28	12.32	0	100	Peak	HORIZONTAL
3 !	191.99	39.41	43.50	-4.09	54.20	1.66	27.14	10.69	0	100	Peak	HORIZONTAL
4 p	322.94	42.53	46.00	-3.47	53.45	2.15	27.06	13.99	0	100	Peak	HORIZONTAL
5 !	500.45	42.17	46.00	-3.83	49.94	2.70	28.10	17.63	0	100	Peak	HORIZONTAL
6	565.44	38.74	46.00	-7.26	45.64	2.83	28.10	18.37	0	100	Peak	HORIZONTAL

Vertical

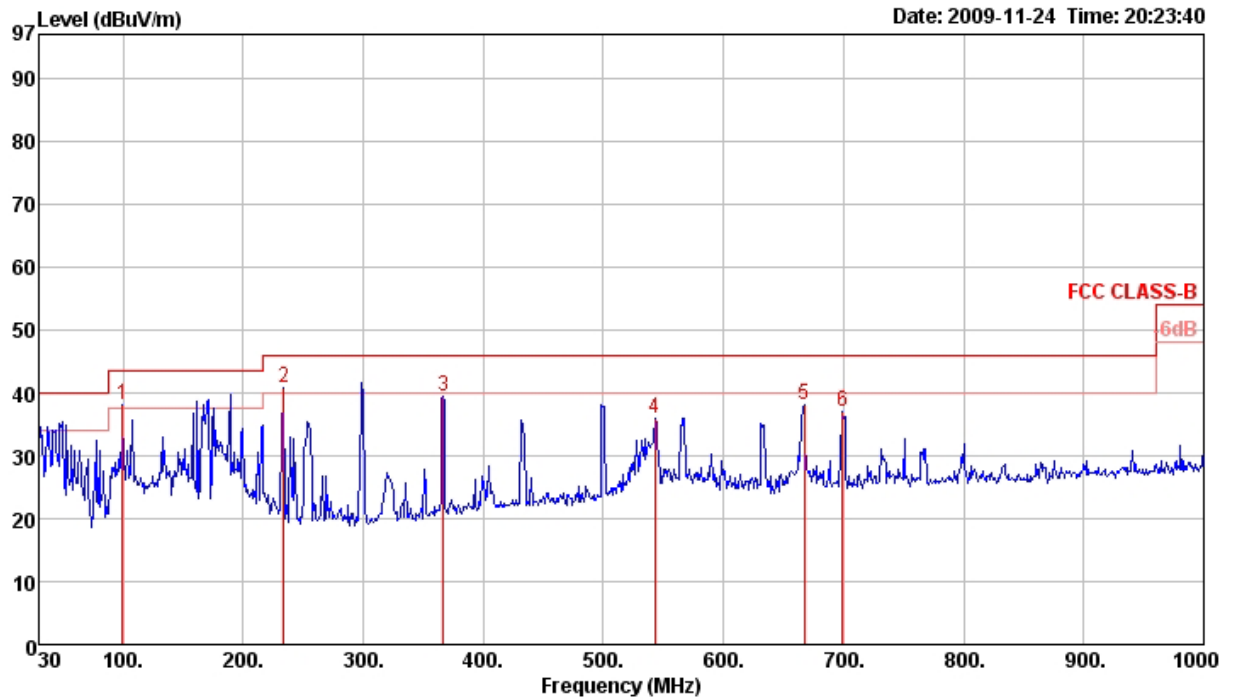

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	99.84	38.12	43.50	-5.38	53.53	1.20	27.60	10.99	0	400	Peak	VERTICAL
2 p	233.70	40.89	46.00	-5.11	54.54	1.83	27.03	11.55	0	400	Peak	VERTICAL
3	366.59	39.34	46.00	-6.66	49.31	2.23	27.37	15.17	0	400	Peak	VERTICAL
4	543.13	35.99	46.00	-10.01	43.18	2.79	28.10	18.12	0	400	Peak	VERTICAL
5	667.29	38.08	46.00	-7.92	43.70	3.43	28.03	18.98	0	400	Peak	VERTICAL
6	699.30	36.90	46.00	-9.10	42.51	3.30	28.00	19.09	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 20MHz Ch 36, Ant. A + Ant. B

Horizontal

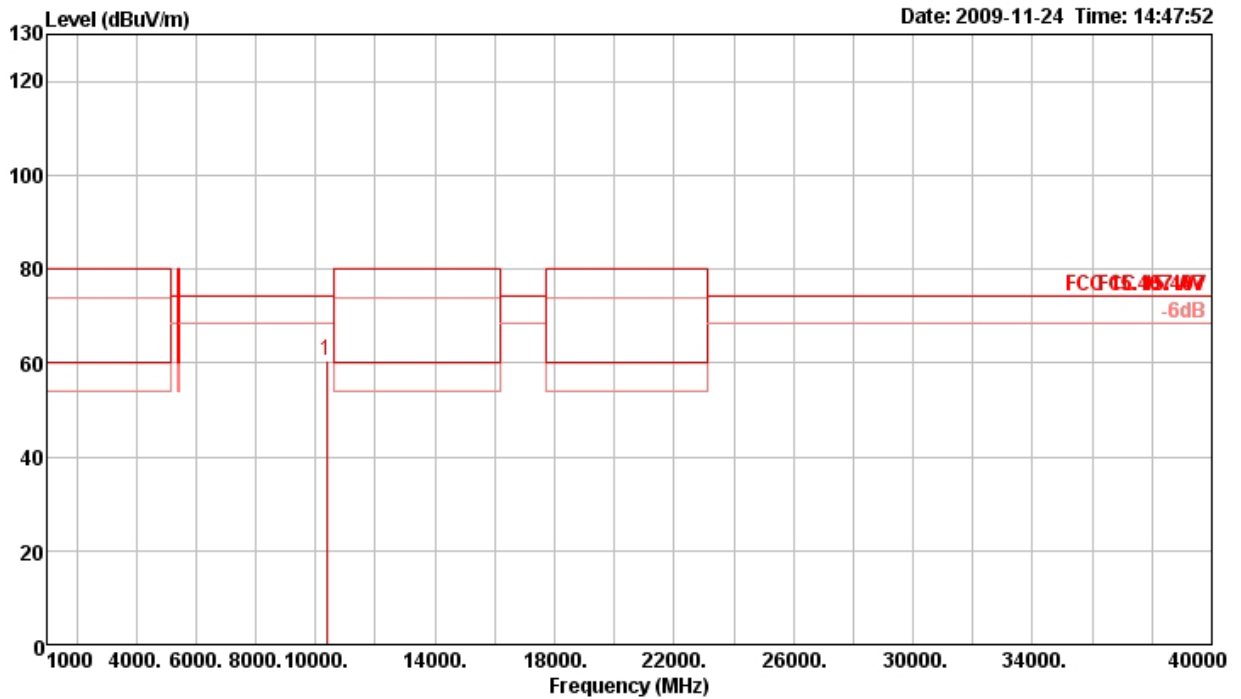

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10366.30	60.32	74.30	-13.98	52.51	4.65	35.36	38.52	342	104	Peak	HORIZONTAL


Vertical

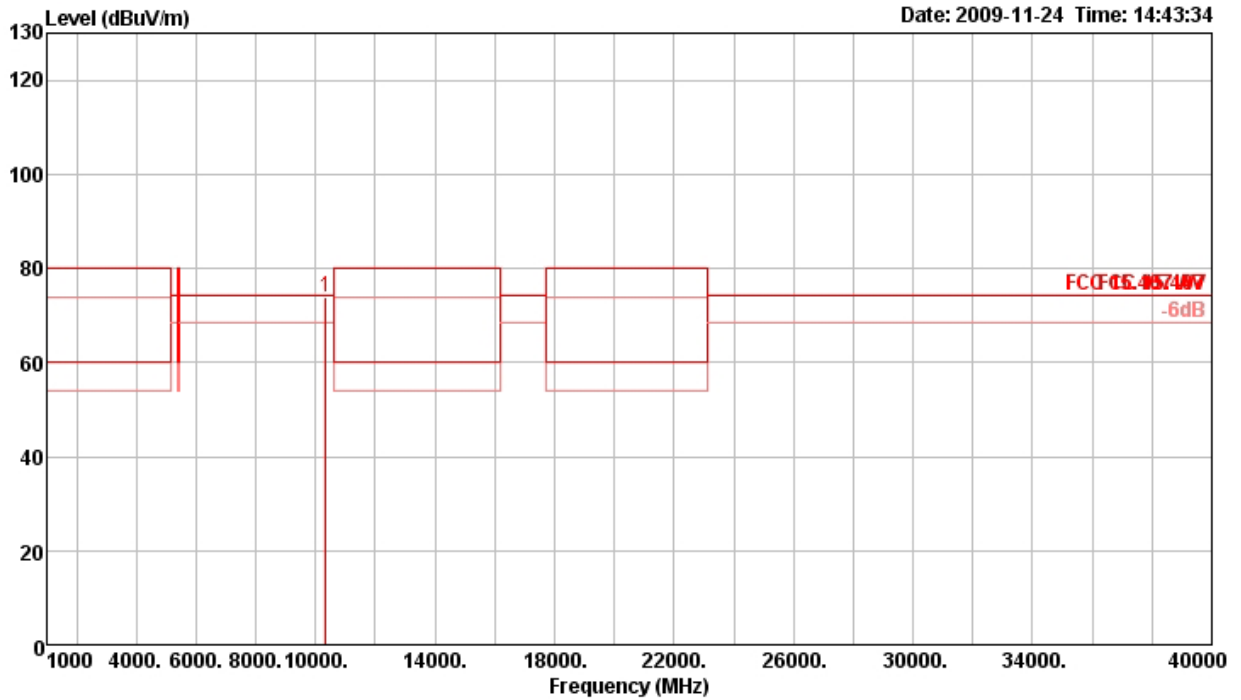

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10350.80	73.93	74.30	-0.37	66.13	4.65	35.36	38.51	274	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 20MHz Ch 40, Ant. A + Ant. B

Horizontal

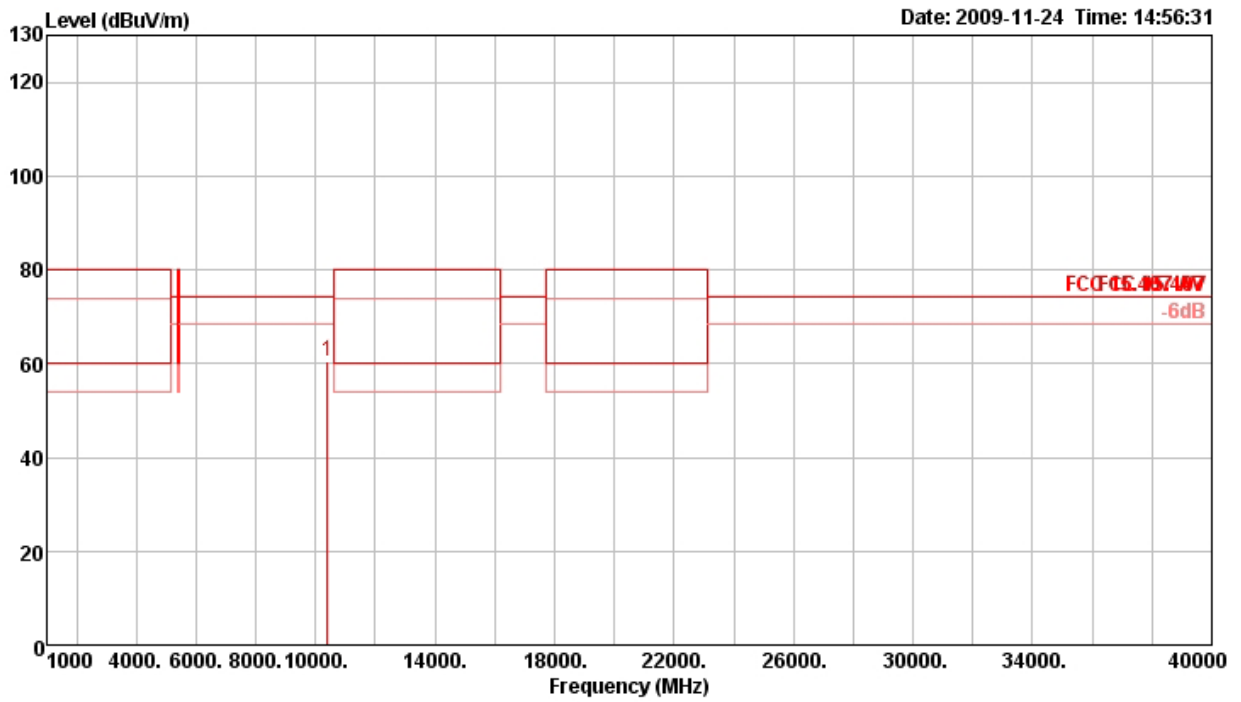

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10393.60	60.36	74.30	-13.94	52.47	4.68	35.33	38.54	195	121	Peak	HORIZONTAL


Vertical

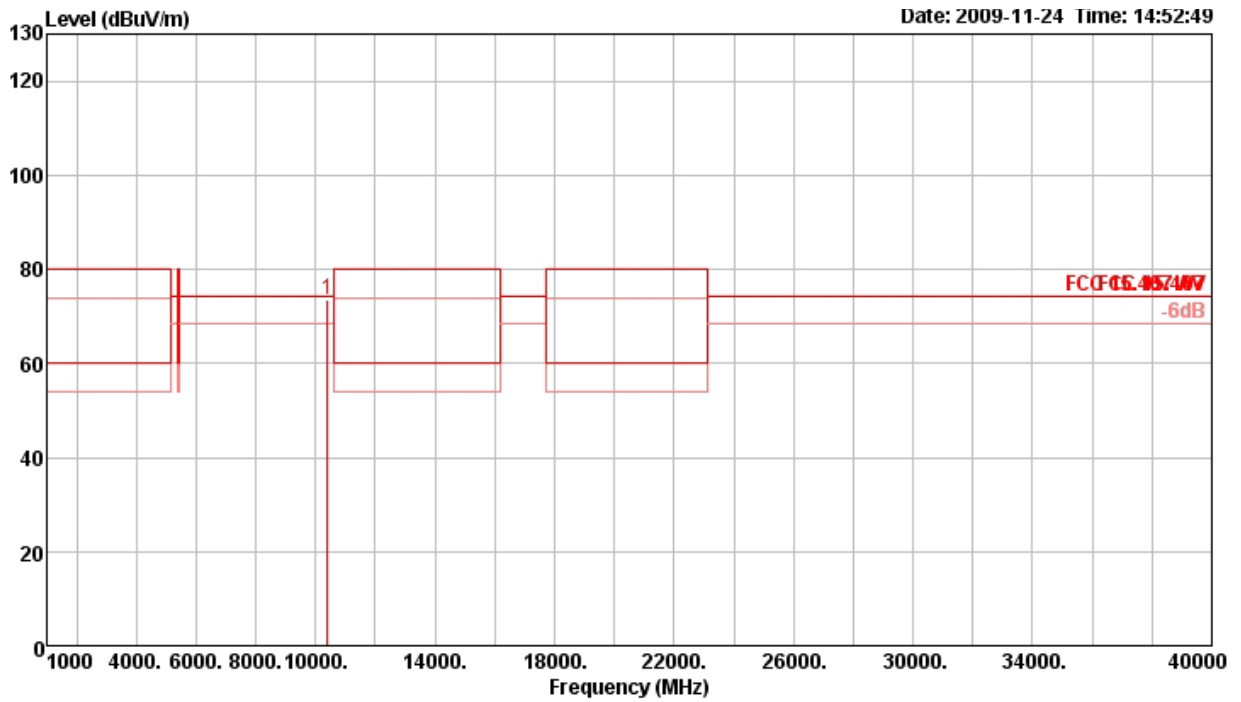

Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p 10392.50	73.49	74.30	-0.81	65.61	4.68	35.33	38.53	276	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 20MHz Ch 48, Ant. A + Ant. B

Horizontal

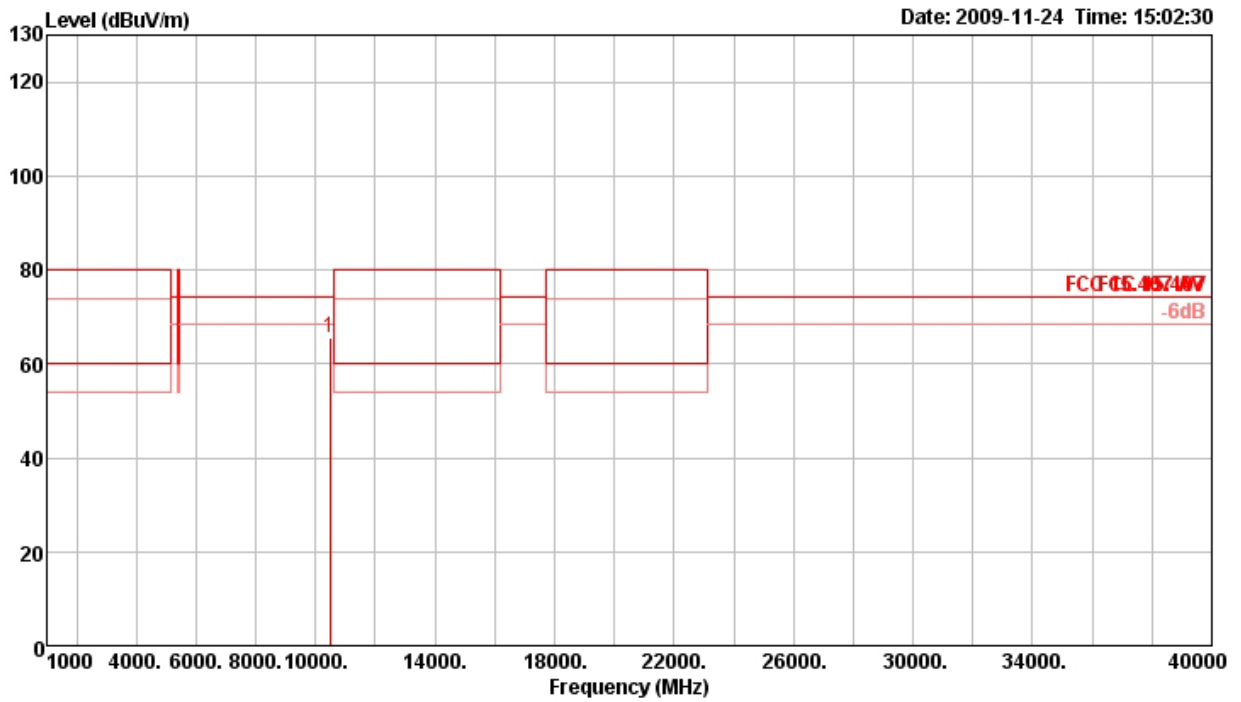

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10485.70	65.71	74.30	-8.59	57.57	4.76	35.21	38.59	36	128	Peak	HORIZONTAL


Vertical

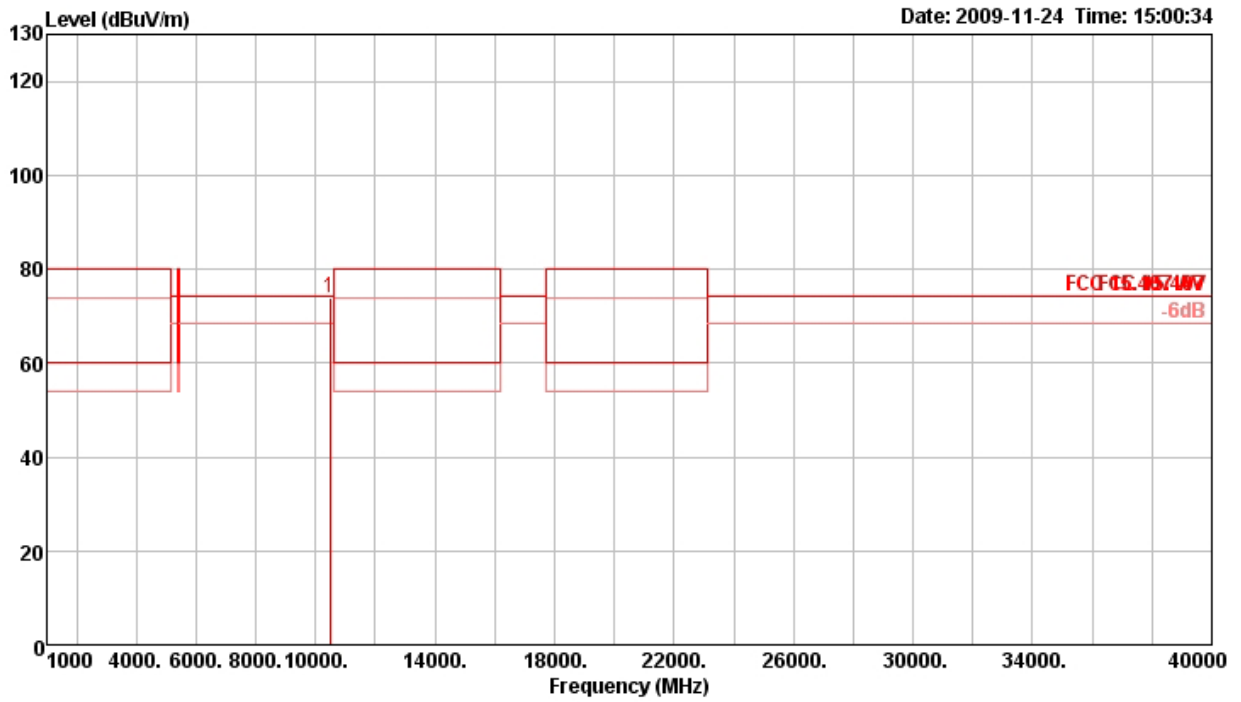

Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p 10485.20	73.71	74.30	-0.59	65.57	4.76	35.21	38.59	274	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 20MHz Ch 52, Ant. A + Ant. B

Horizontal

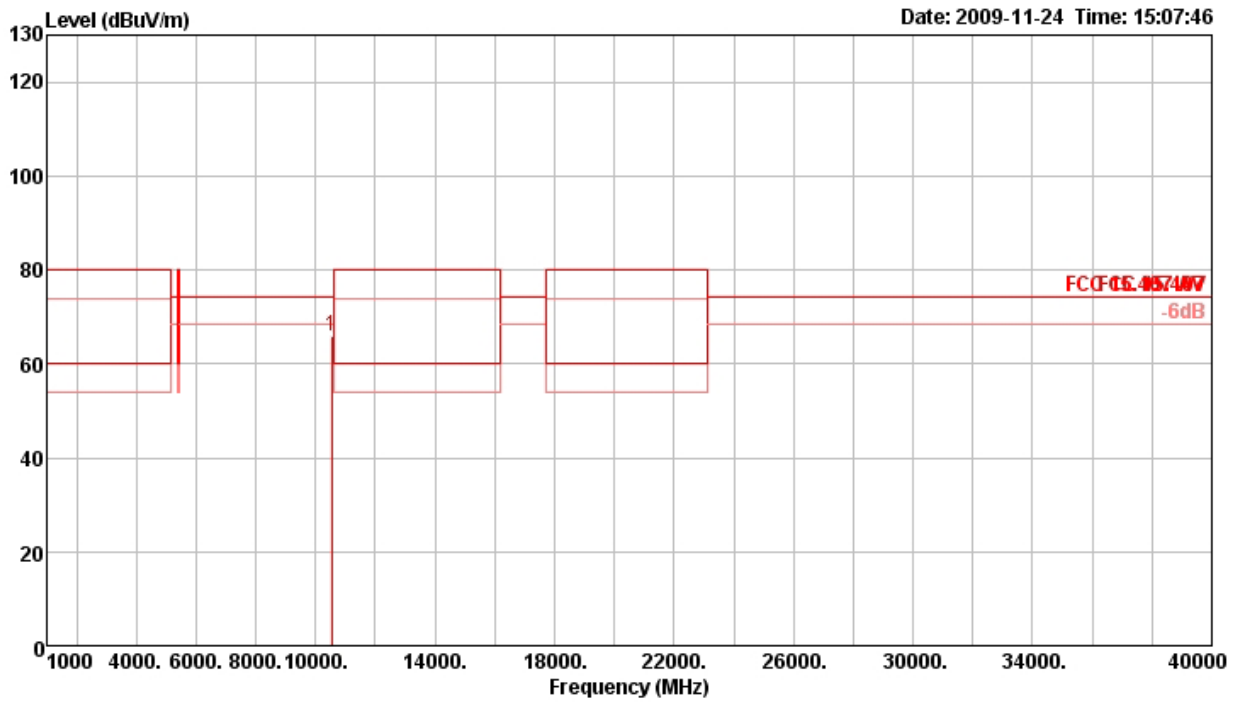

Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p 10528.20	65.74	74.30	-8.56	57.54	4.76	35.15	38.59	173	110	Peak	HORIZONTAL


Vertical

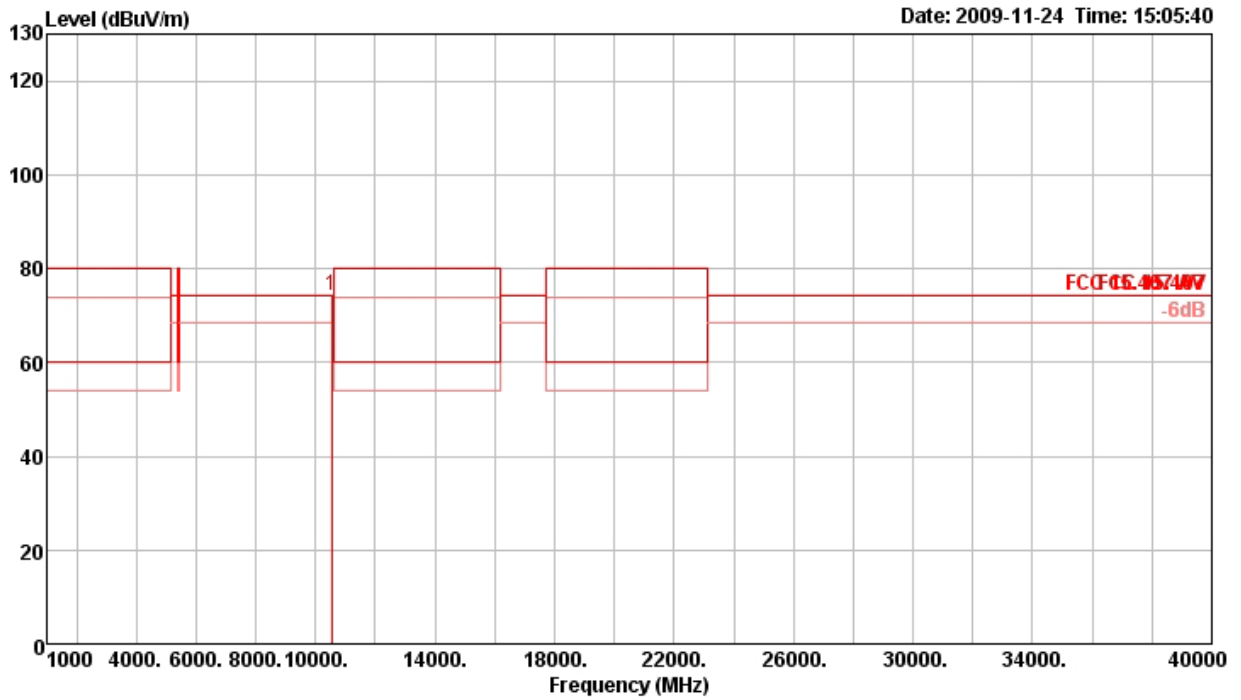

Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p 10524.60	74.07	74.30	-0.23	65.87	4.76	35.15	38.59	275	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 20MHz Ch 60, Ant. A + Ant. B

Horizontal

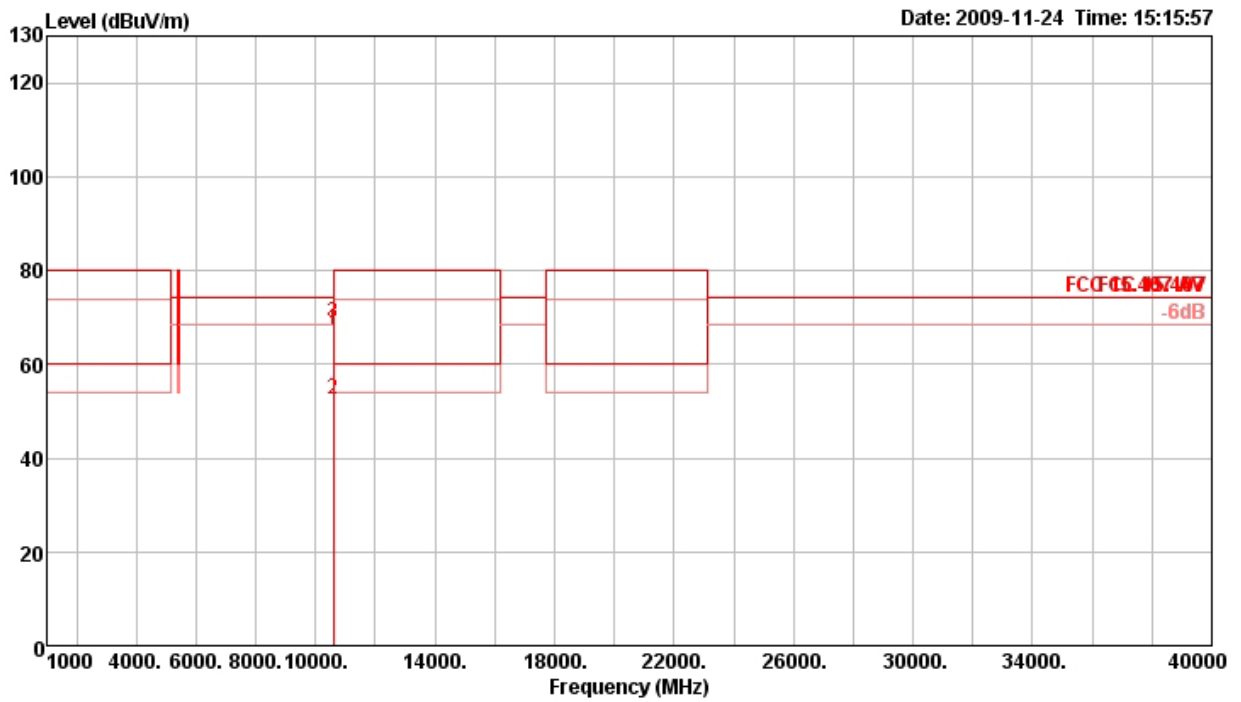

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	p 10590.10	67.47	74.30	-6.83	59.27	4.73	35.10	38.57	37	128	Peak	HORIZONTAL
2	a 10606.30	52.64	60.00	-7.36	44.45	4.71	35.08	38.56	37	128	Average	HORIZONTAL
3	10606.80	68.71	80.00	-11.29	60.52	4.71	35.08	38.56	37	128	Peak	HORIZONTAL


Vertical

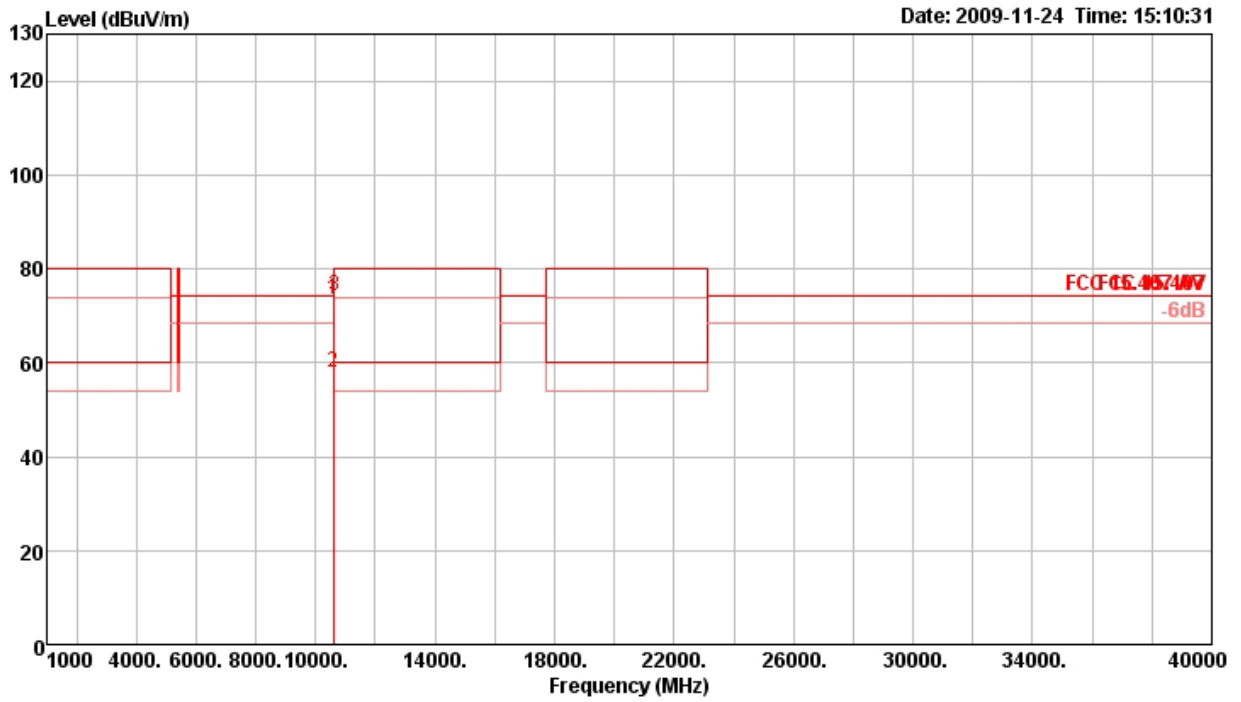

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10590.70	73.49	74.30	-0.81	65.29	4.73	35.10	38.57	276	100	Peak	VERTICAL
2 a	10605.10	57.80	60.00	-2.20	49.61	4.71	35.08	38.56	276	100	Average	VERTICAL
3 !	10608.10	74.16	80.00	-5.84	65.97	4.71	35.08	38.56	276	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 20MHz Ch 64, Ant. A + Ant. B

Horizontal

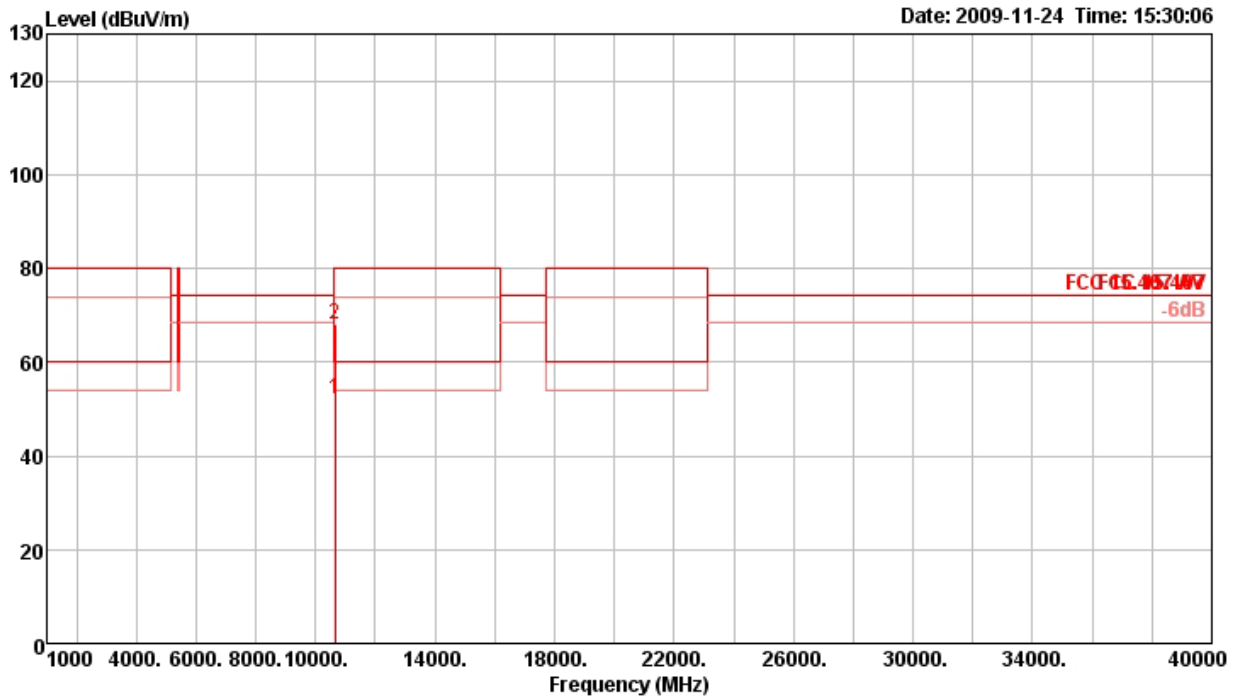

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	10646.70	52.23	60.00	-7.77	44.04	4.70	35.05	38.54	37	131	Average	HORIZONTAL
2 p	10648.00	68.15	80.00	-11.85	59.96	4.70	35.05	38.54	37	131	Peak	HORIZONTAL


Vertical

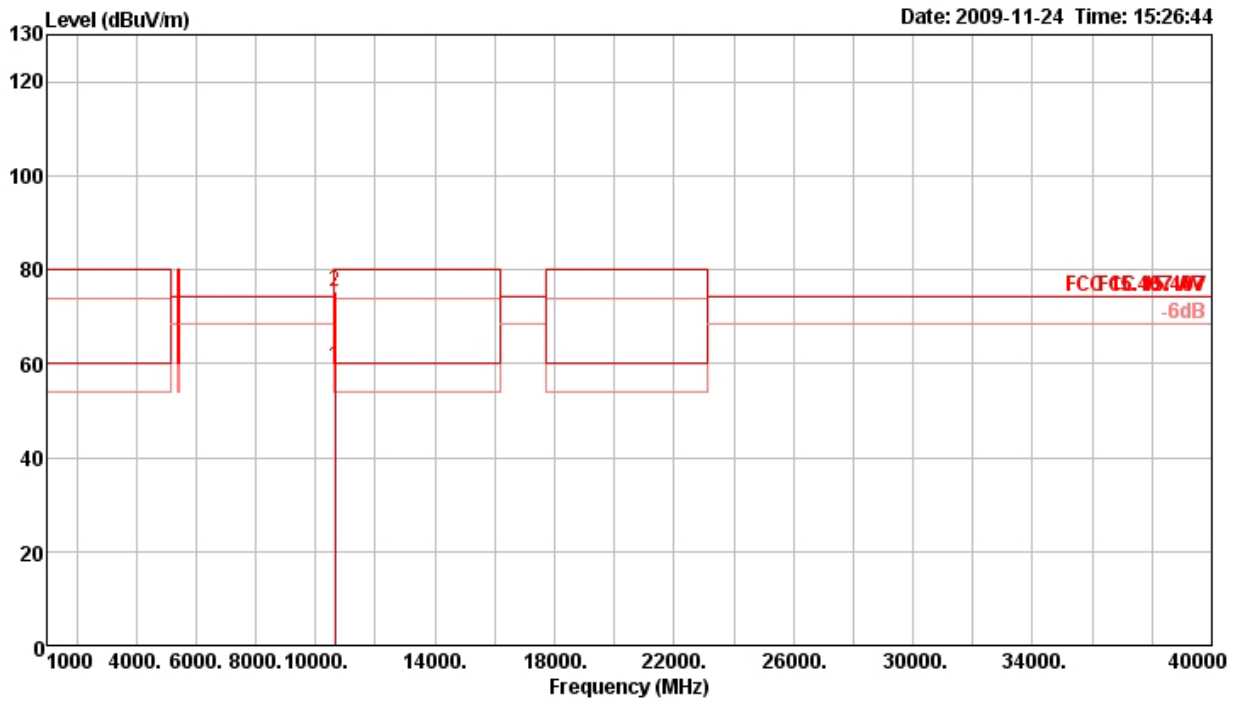

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	10644.90	59.23	60.00	-0.77	51.04	4.70	35.05	38.54	274	100	Average	VERTICAL
2 p	10645.70	75.19	80.00	-4.81	67.00	4.70	35.05	38.54	274	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 20MHz Ch 100, Ant. A + Ant. B

Horizontal

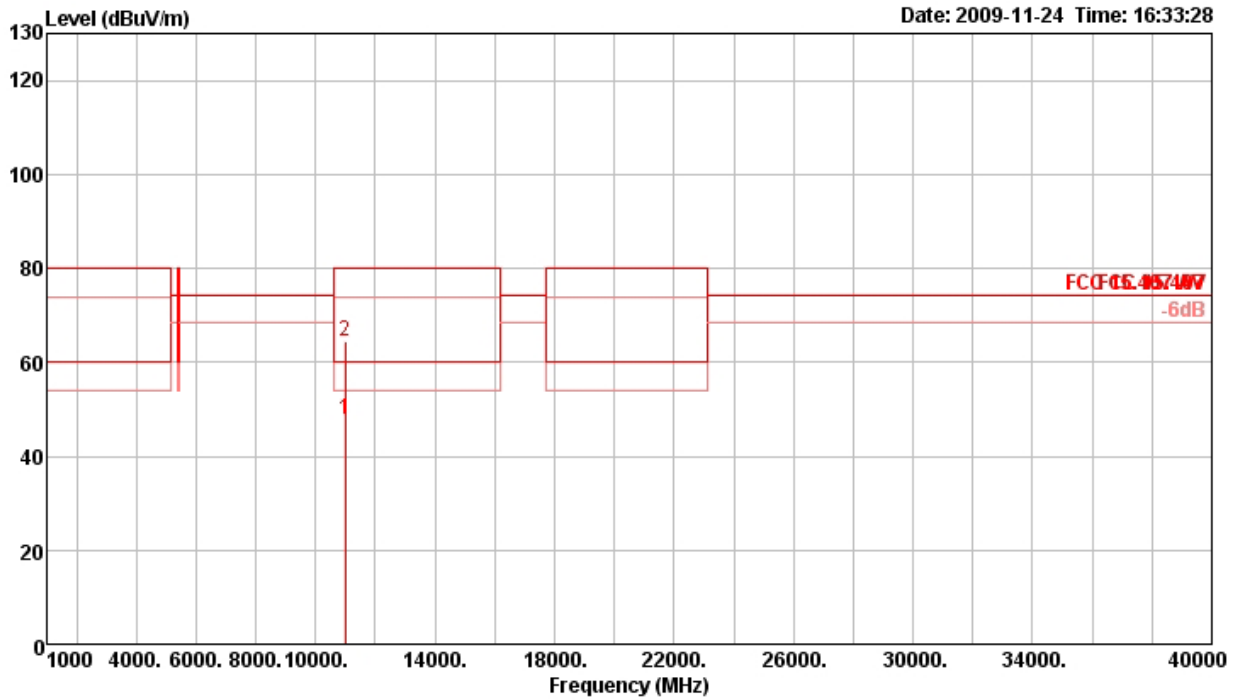

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11004.20	47.76	60.00	-12.24	39.58	4.47	34.69	38.40	209	114	Average	HORIZONTAL
2 p	11004.20	64.44	80.00	-15.56	56.26	4.47	34.69	38.40	209	114	Peak	HORIZONTAL


Vertical

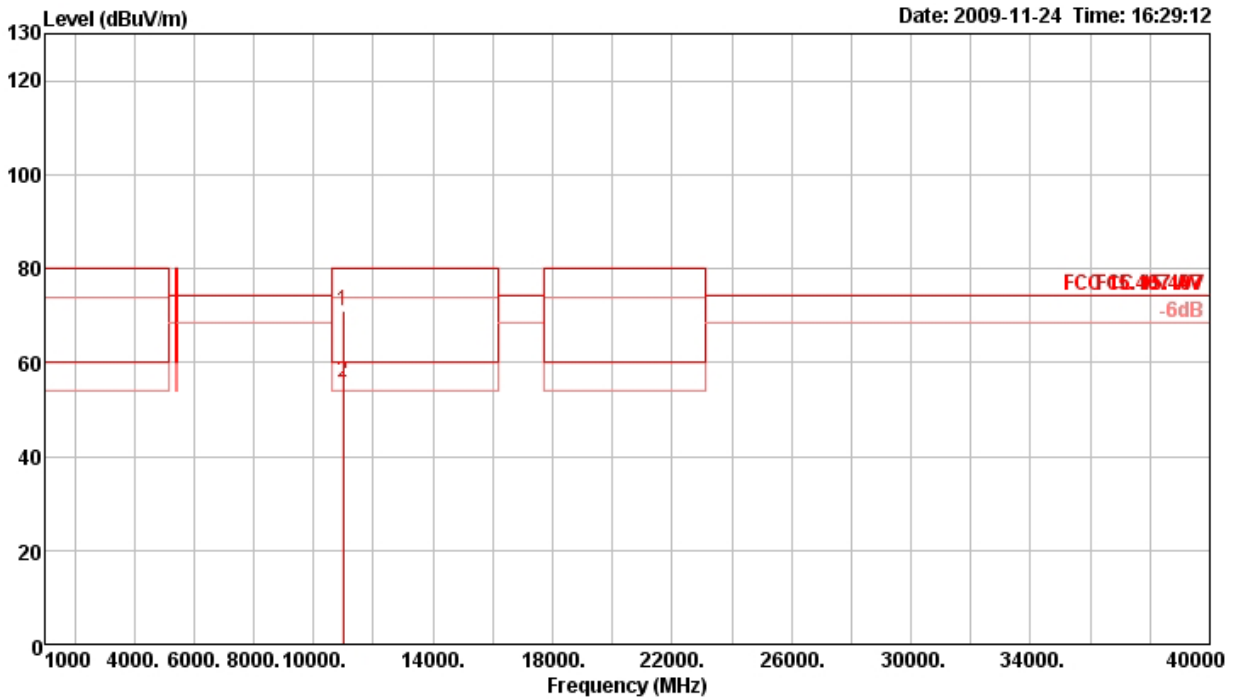

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11000.10	70.81	80.00	-9.19	62.63	4.47	34.69	38.40	91	104	Peak	VERTICAL
2 a	11000.40	55.71	60.00	-4.29	47.53	4.47	34.69	38.40	91	104	Average	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 20MHz Ch 116, Ant. A + Ant. B

Horizontal

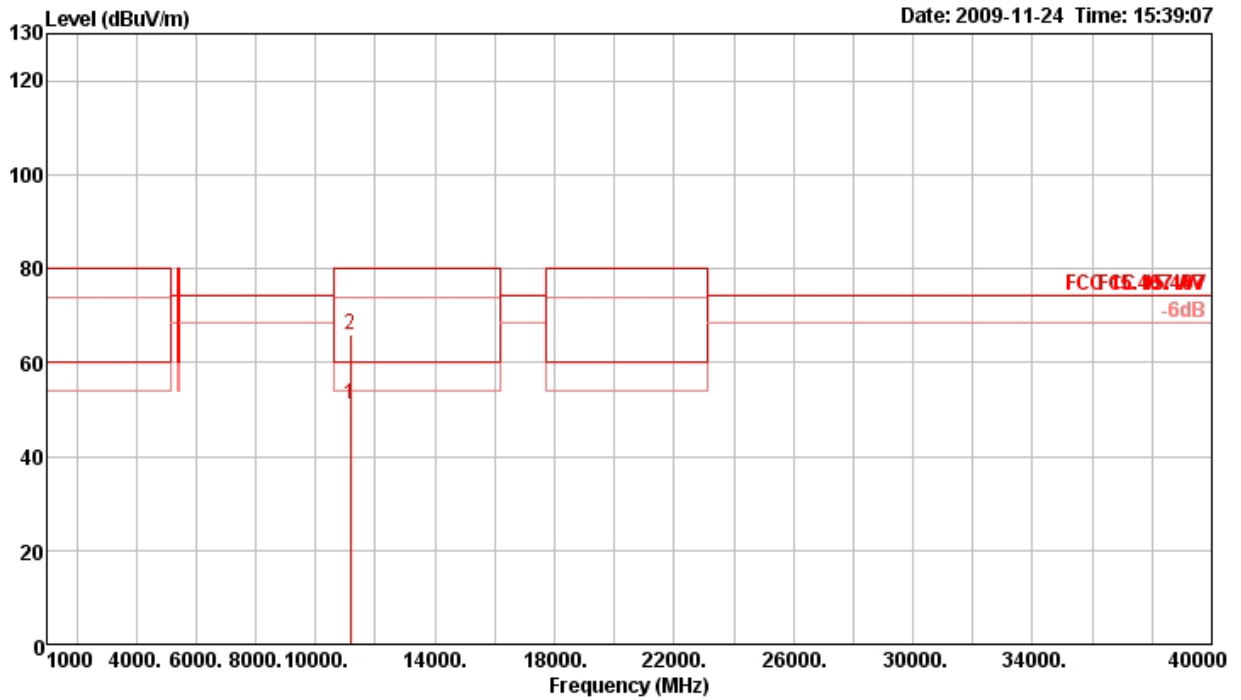

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11160.80	51.14	60.00	-8.86	42.86	4.56	34.71	38.43	290	141	Average	HORIZONTAL
2 p	11162.10	65.75	80.00	-14.25	57.45	4.58	34.71	38.43	290	141	Peak	HORIZONTAL


Vertical

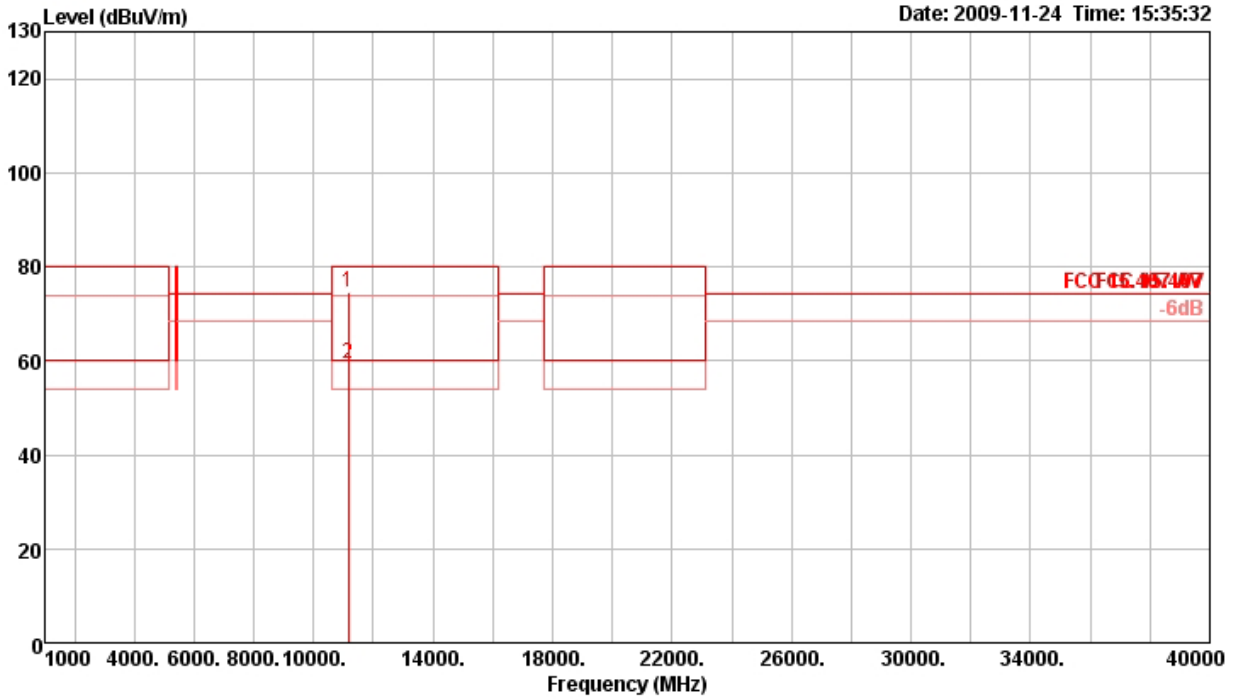

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11158.80	74.46	80.00	-5.54	66.18	4.56	34.71	38.43	90	114	Peak	VERTICAL
2 a	11159.30	59.52	60.00	-0.48	51.24	4.56	34.71	38.43	90	114	Average	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 20MHz Ch 140, Ant. A + Ant. B

Horizontal

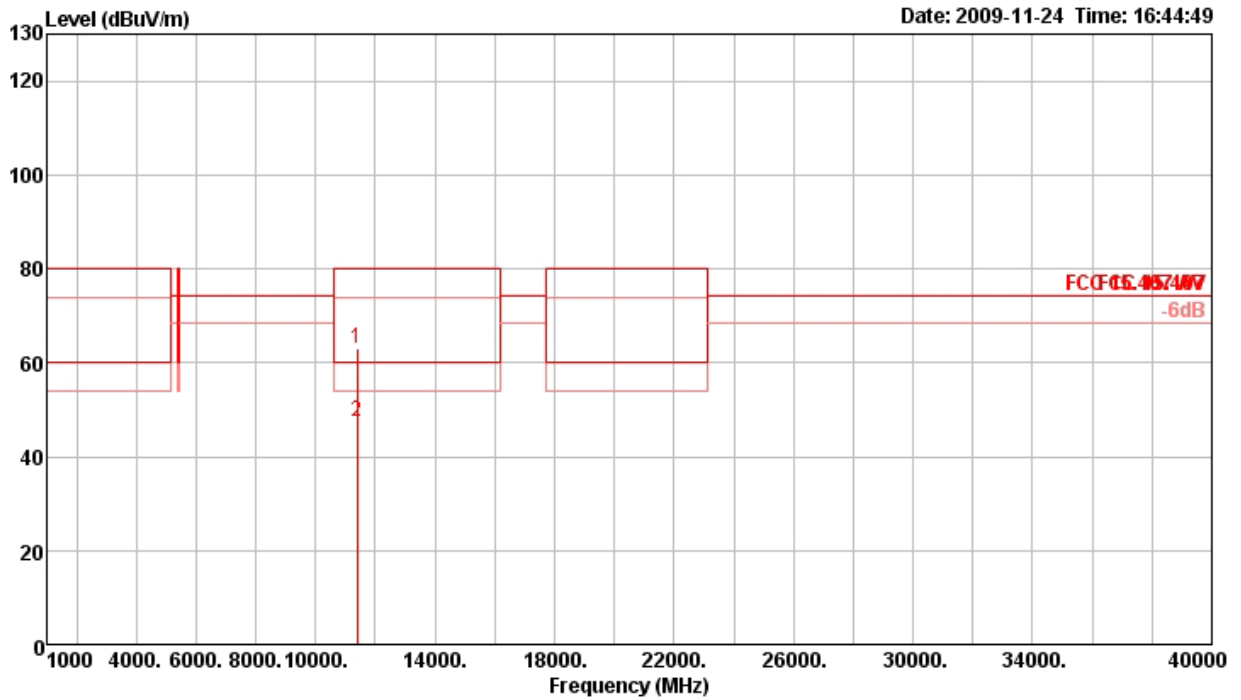

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11396.70	63.13	80.00	-16.87	54.67	4.72	34.74	38.48	179	109	Peak	HORIZONTAL
2 a	11399.30	47.50	60.00	-12.50	39.04	4.72	34.74	38.48	179	109	Average	HORIZONTAL


Vertical

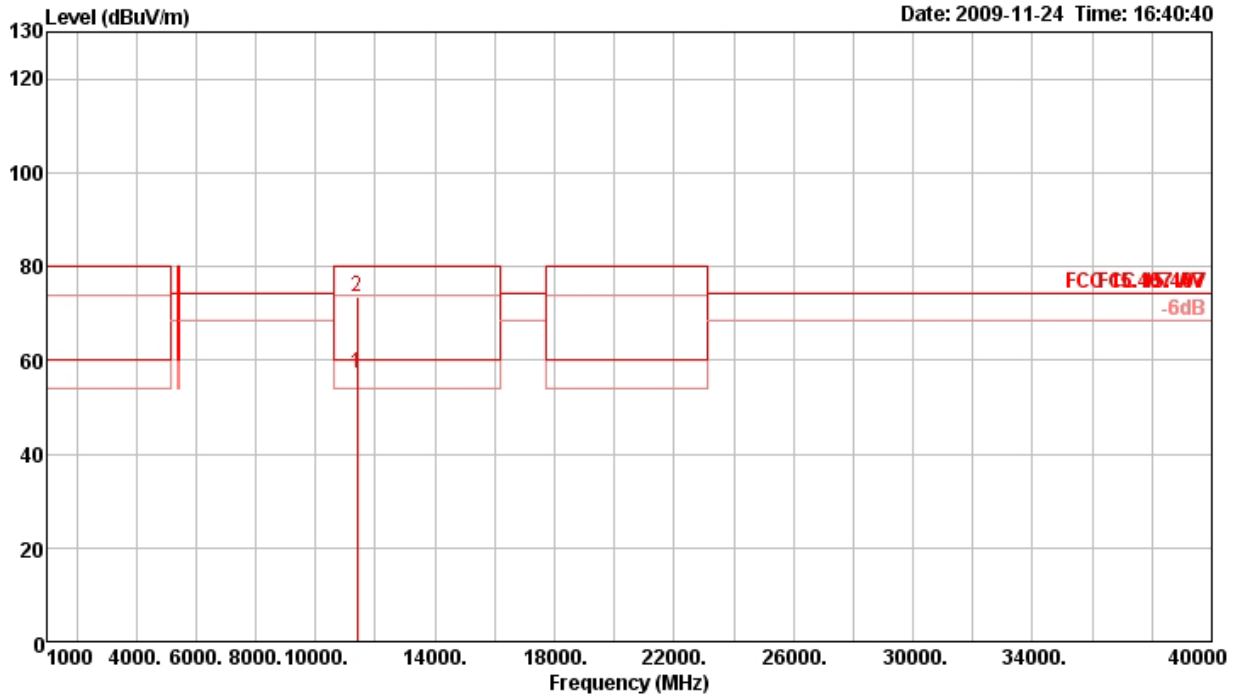

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11399.00	57.19	60.00	-2.81	48.73	4.72	34.74	38.48	94	105	Average	VERTICAL
2 p	11400.30	73.34	80.00	-6.66	64.88	4.72	34.74	38.48	94	105	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 40MHz Ch 38, Ant. A + Ant. B

Horizontal

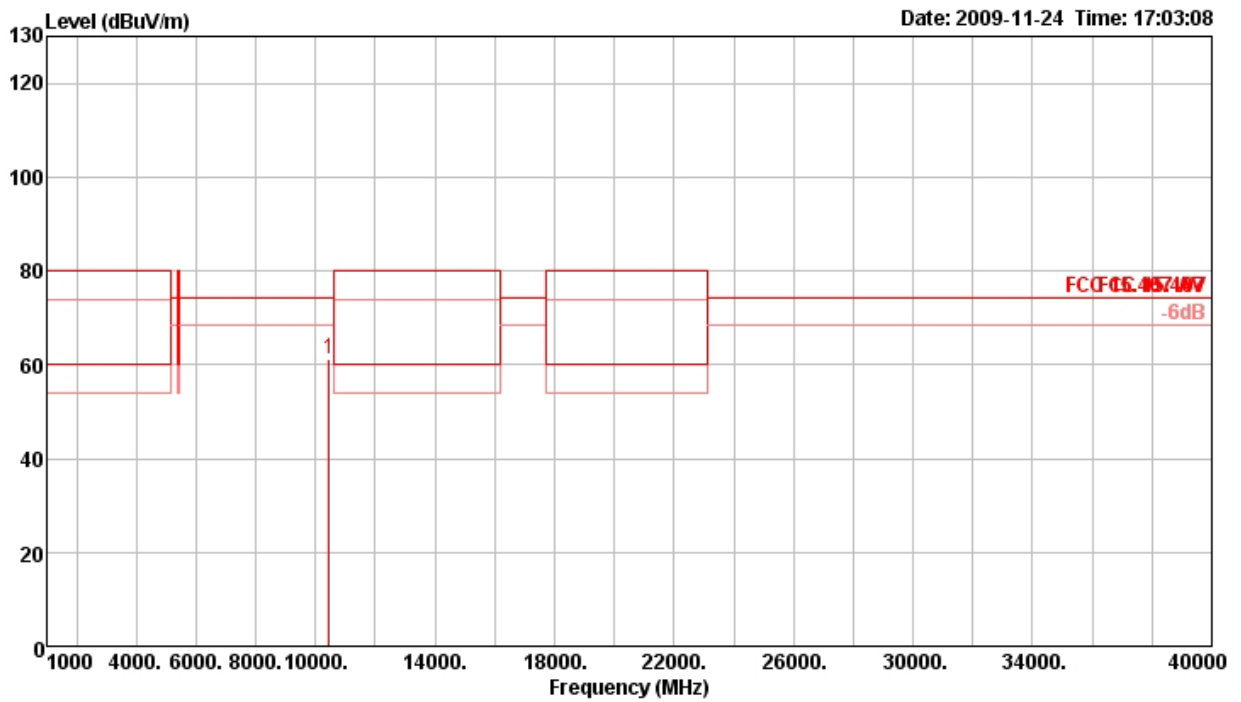

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10457.40	61.03	74.30	-13.27	52.96	4.74	35.24	38.57	205	113	Peak	HORIZONTAL

Vertical

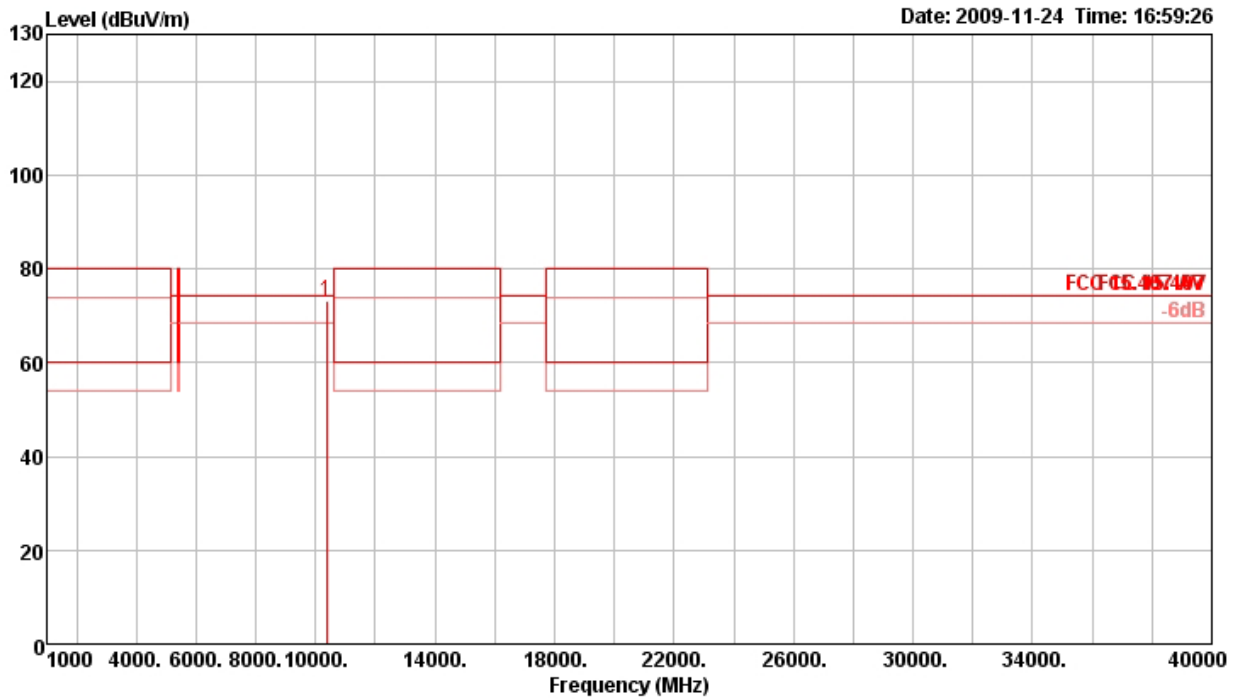


Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p 10377.40	73.11	74.30	-1.19	65.23	4.68	35.33	38.53	276	100	Peak	VERTICAL




Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 40MHz Ch 46, Ant. A + Ant. B

Horizontal

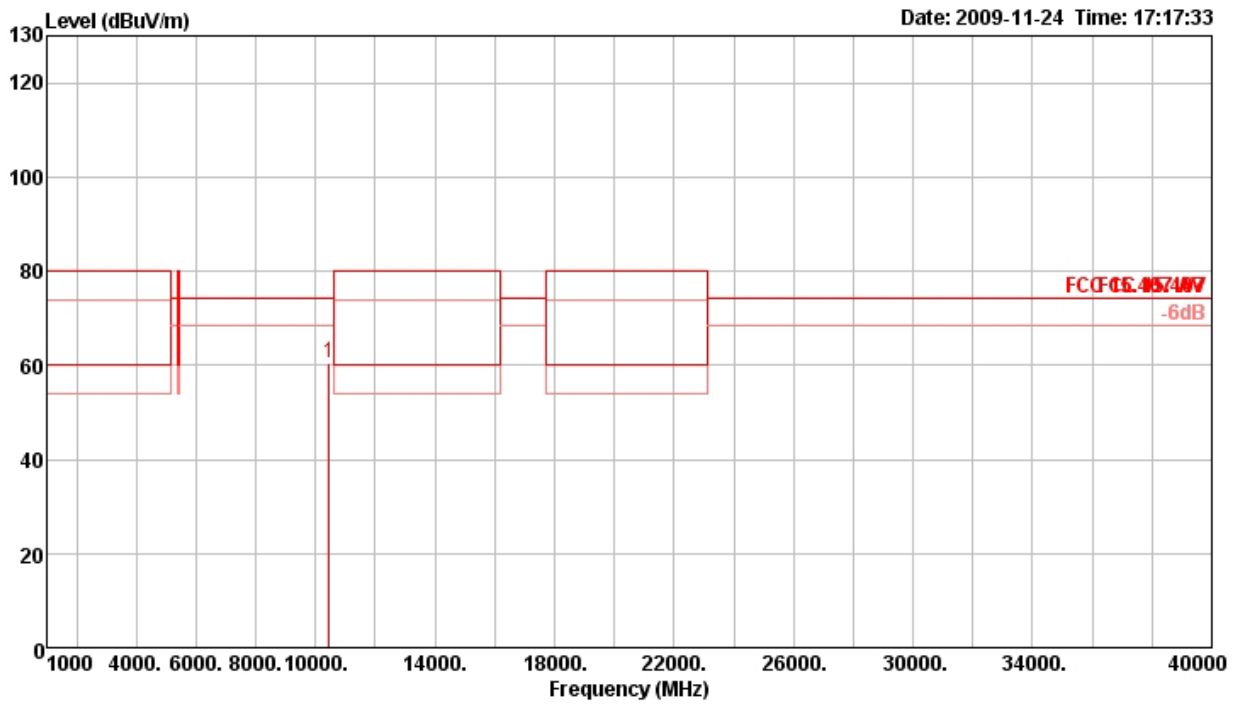

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10457.60	60.49	74.30	-13.81	52.42	4.74	35.24	38.57	245	120	Peak	HORIZONTAL


Vertical

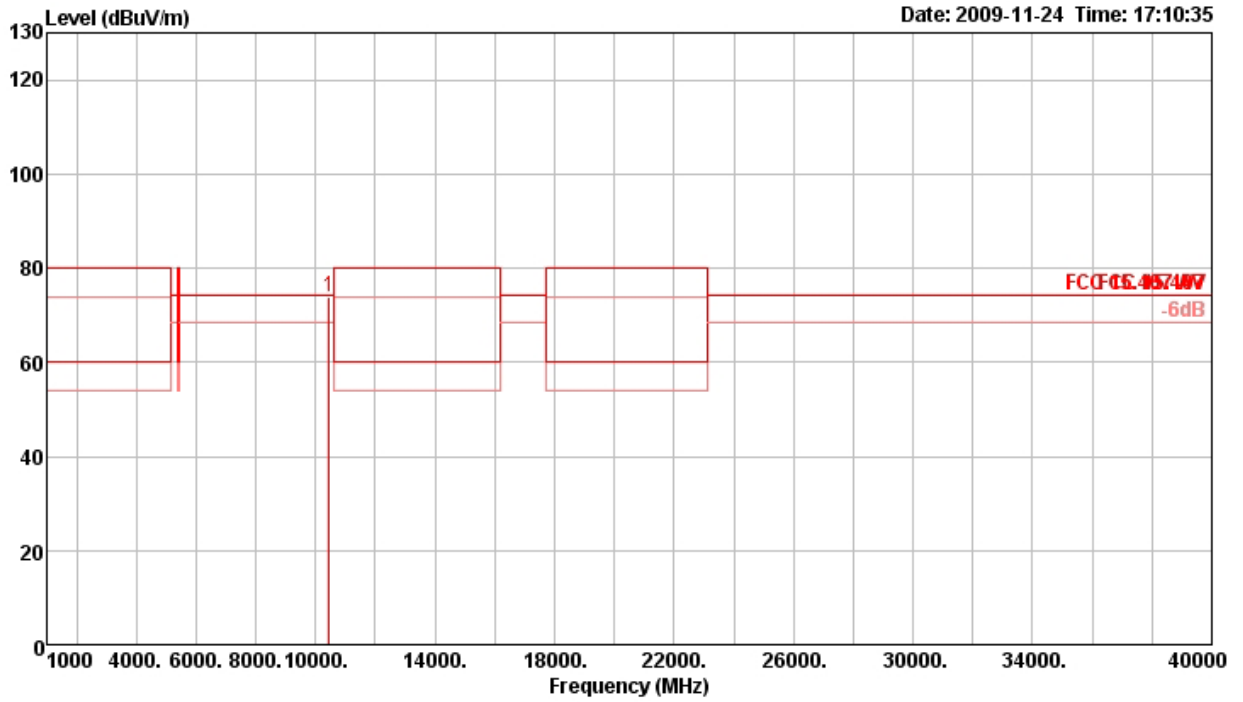

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1 p	10457.60	73.95	74.30	-0.35	65.88	4.74	35.24	38.57	275	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 40MHz Ch 54, Ant. A + Ant. B

Horizontal

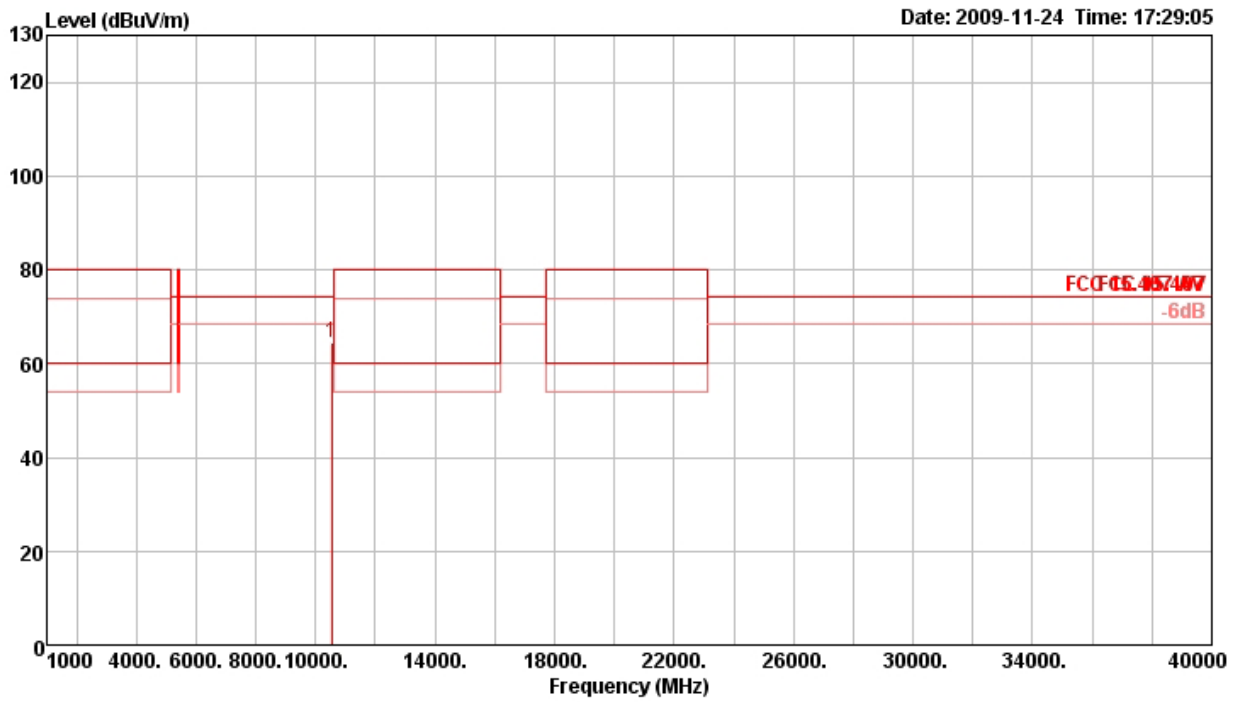

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10537.40	64.59	74.30	-9.71	56.39	4.76	35.15	38.59	163	124	Peak	HORIZONTAL


Vertical

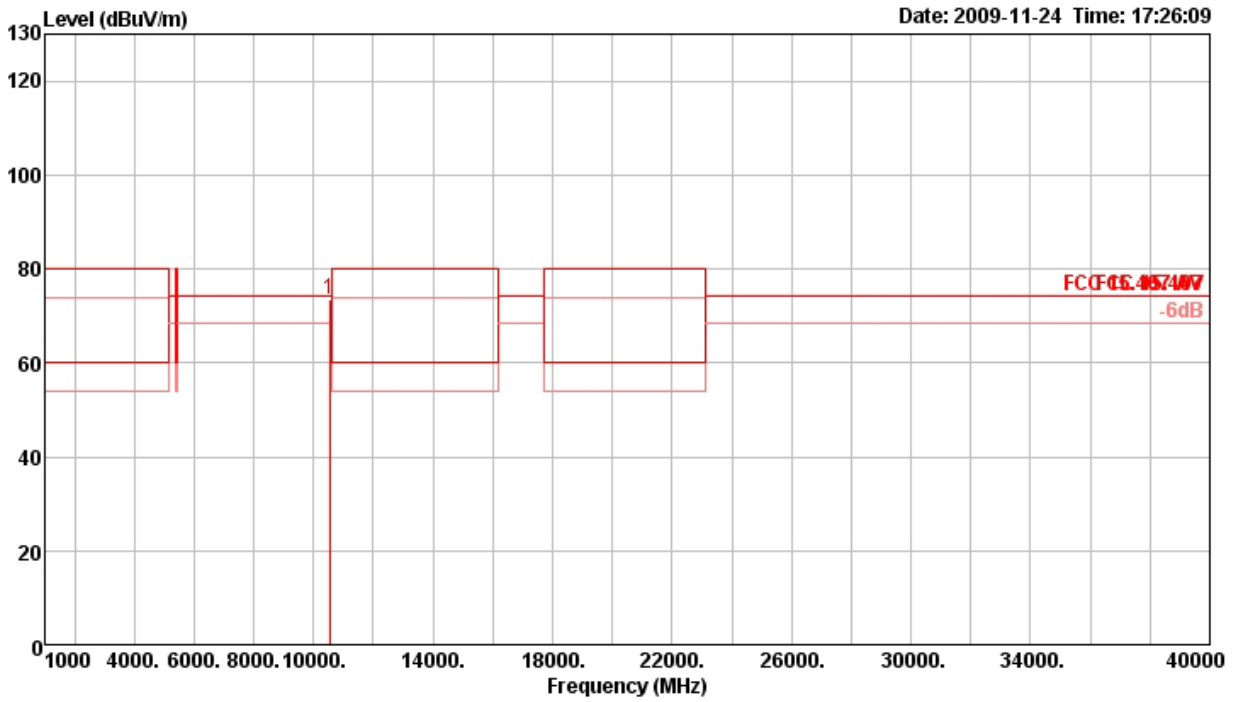

Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p 10537.70	73.60	74.30	-0.70	65.40	4.76	35.15	38.59	274	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 40MHz Ch 62, Ant. A + Ant. B

Horizontal

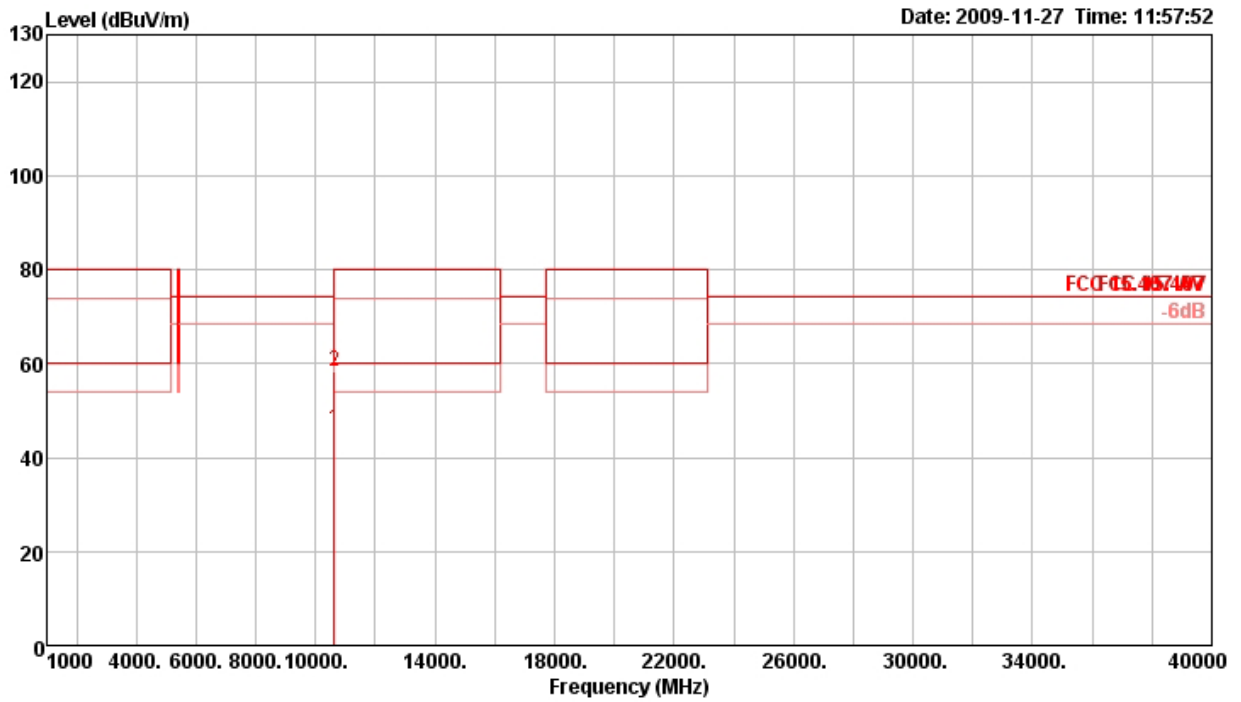

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	10624.20	45.83	60.00	-14.17	37.65	4.71	35.08	38.55	85	100	Average	HORIZONTAL
2 p	10624.80	58.46	80.00	-21.54	50.28	4.71	35.08	38.55	85	100	Peak	HORIZONTAL

Vertical

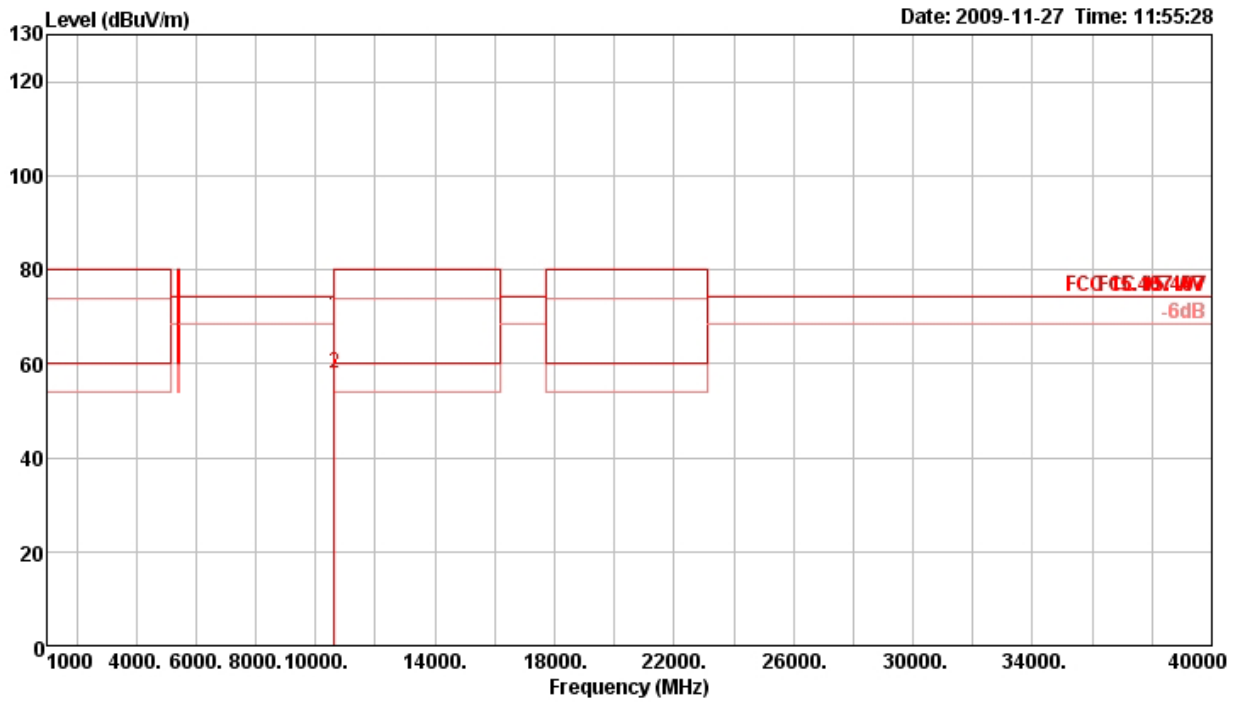


	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	p 10617.40	70.27	80.00	-9.73	62.09	4.71	35.08	38.55	94	100	Peak	VERTICAL
2	a 10626.60	58.08	60.00	-1.92	49.88	4.70	35.05	38.55	94	100	Average	VERTICAL




Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 40MHz Ch 102, Ant. A + Ant. B

Horizontal

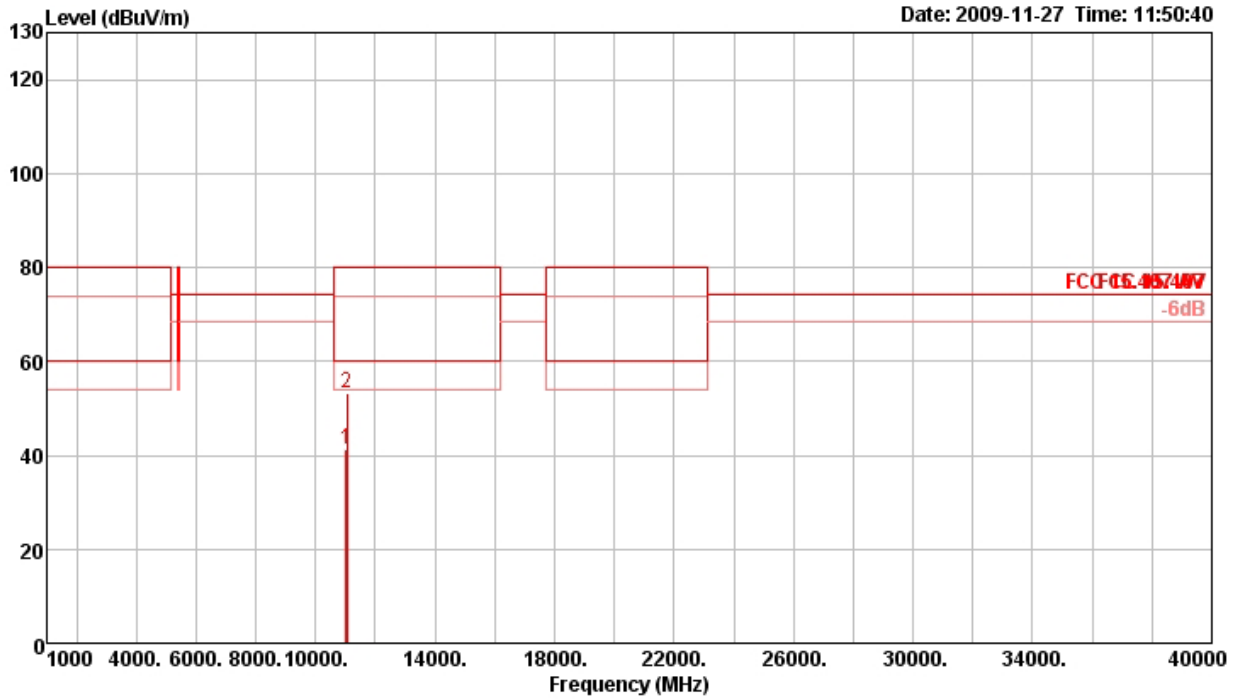

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1 a	11021.00	41.15	60.00	-18.85	32.95	4.49	34.69	38.40	294	113	Average	HORIZONTAL
2 p	11038.40	53.22	80.00	-26.78	45.01	4.50	34.70	38.41	294	113	Peak	HORIZONTAL


Vertical

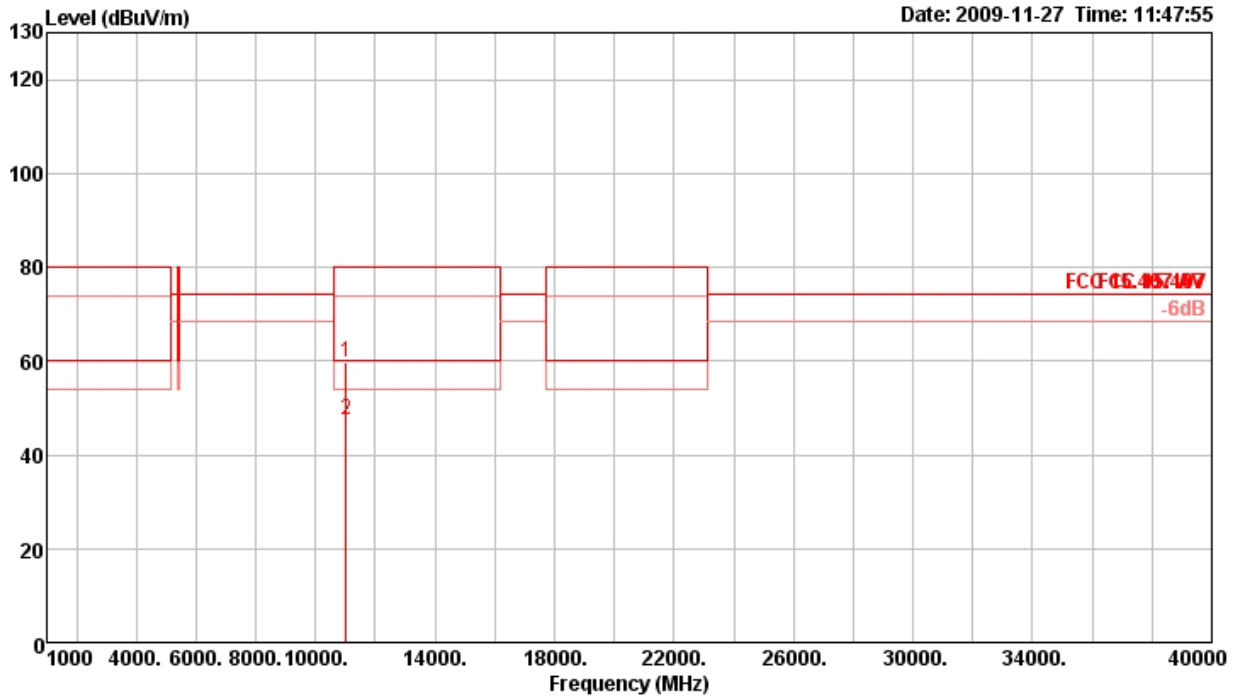

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11020.00	59.79	80.00	-20.21	51.59	4.49	34.69	38.40	91	100	Peak	VERTICAL
2 a	11021.40	47.35	60.00	-12.65	39.15	4.49	34.69	38.40	91	100	Average	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 40MHz Ch 110, Ant. A + Ant. B

Horizontal

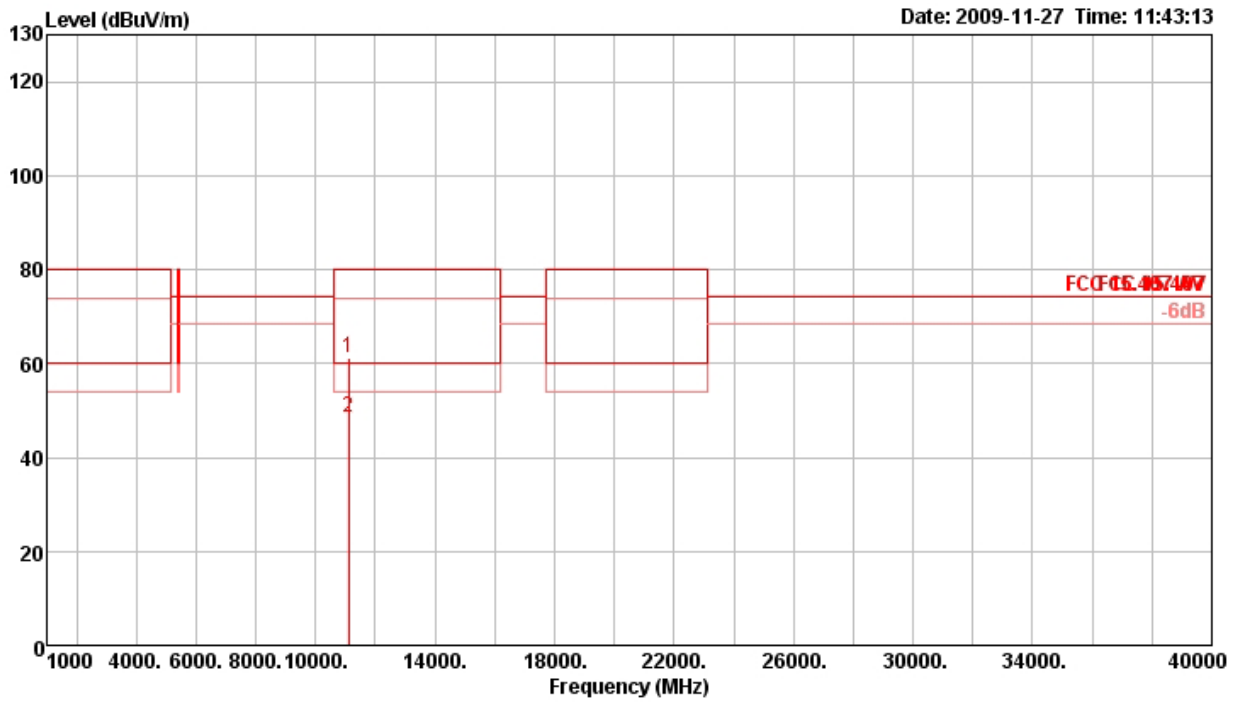

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11099.40	61.11	80.00	-18.89	52.86	4.53	34.70	38.42	84	100	Peak	HORIZONTAL
2 a	11101.00	48.56	60.00	-11.44	40.31	4.53	34.70	38.42	84	100	Average	HORIZONTAL


Vertical

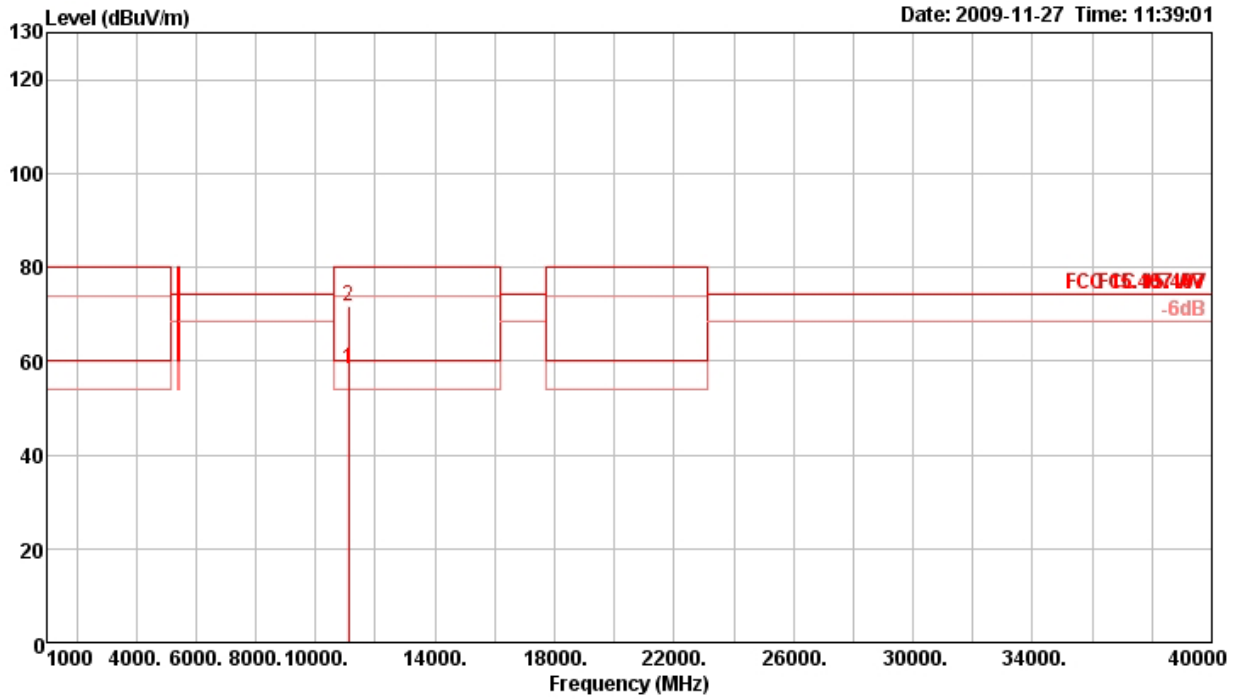

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11100.00	58.19	60.00	-1.81	49.94	4.53	34.70	38.42	96	100	Average	VERTICAL
2 p	11118.40	71.82	80.00	-8.18	63.55	4.55	34.70	38.42	96	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 40MHz Ch 134, Ant. A + Ant. B

Horizontal

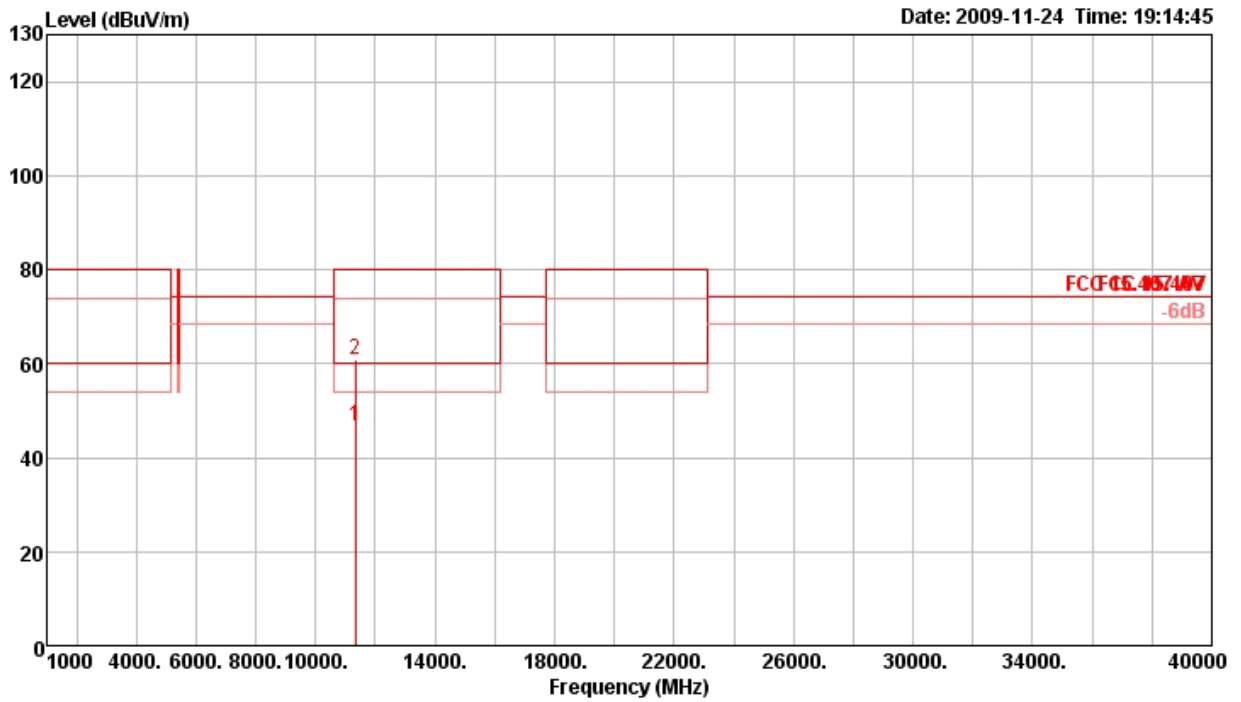

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11337.49	46.56	60.00	-13.44	38.15	4.67	34.73	38.47	271	100	Average	HORIZONTAL
2 p	11338.07	60.78	80.00	-19.22	52.37	4.67	34.73	38.47	271	100	Peak	HORIZONTAL

Vertical

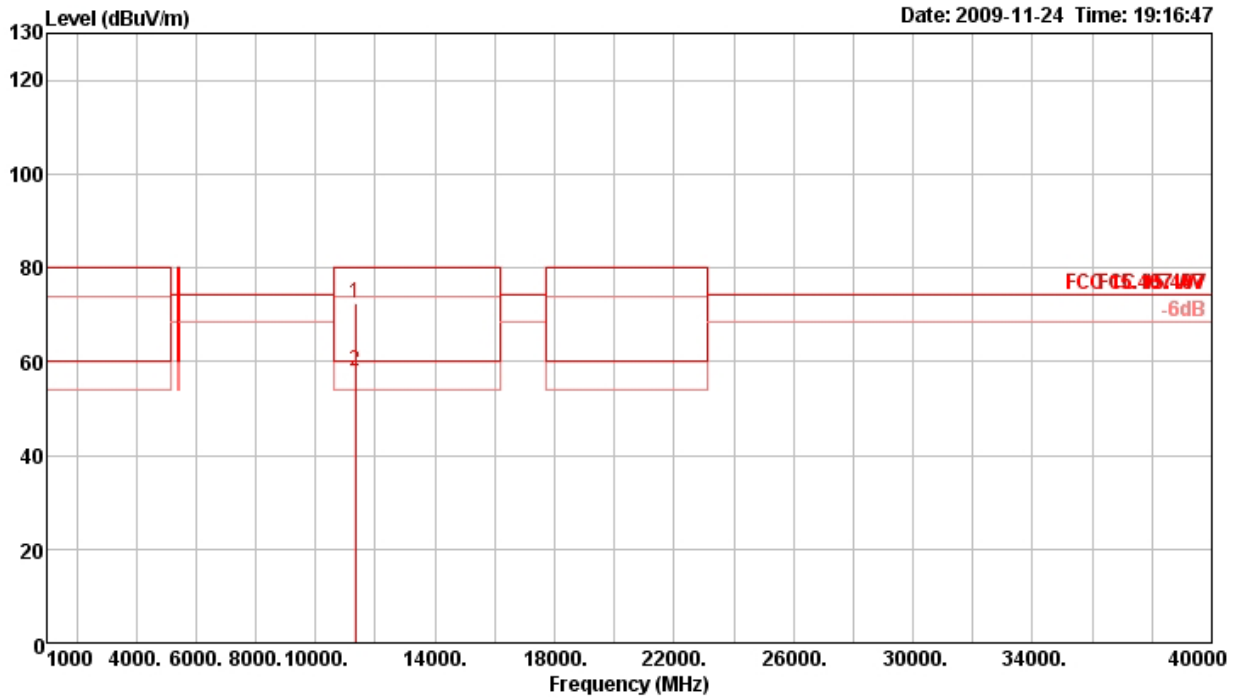

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	p 11337.18	72.38	80.00	-7.62	63.97	4.67	34.73	38.47	94	118	Peak	VERTICAL
2	a 11337.69	58.10	60.00	-1.90	49.69	4.67	34.73	38.47	94	118	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a Ch 36, Ant. A + Ant. B

Horizontal

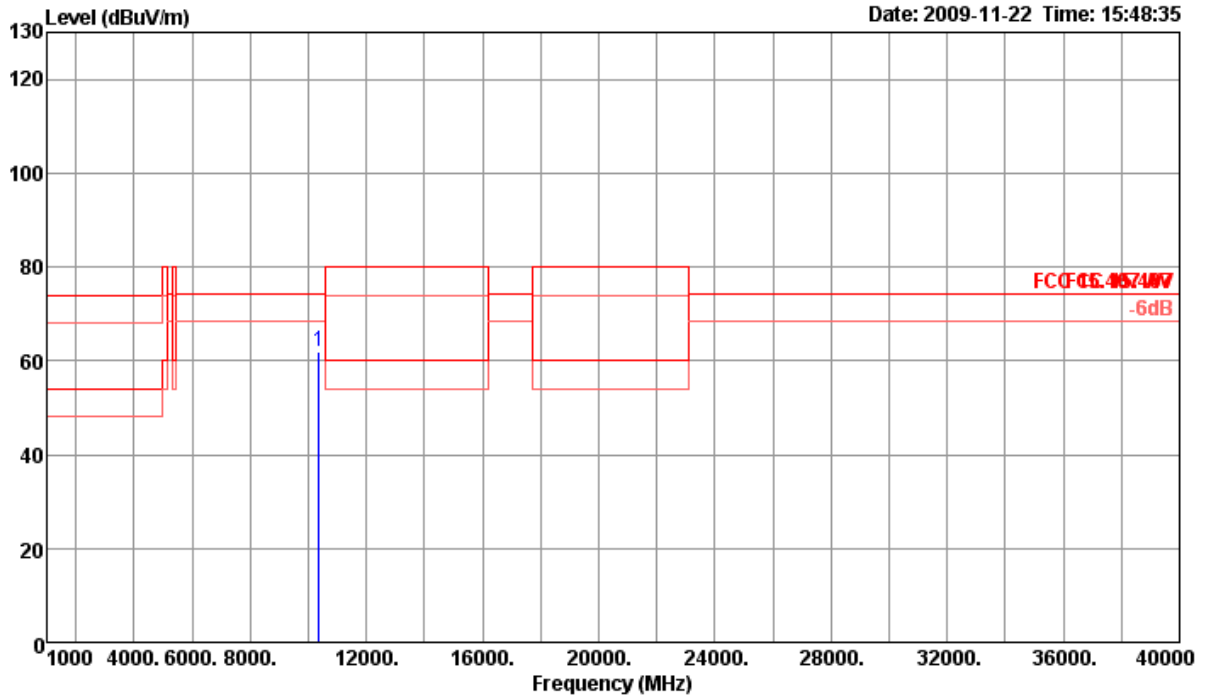

Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p 10358.20	61.98	74.30	-12.32	52.74	6.49	38.37	35.62	87	119	Peak	HORIZONTAL

Vertical

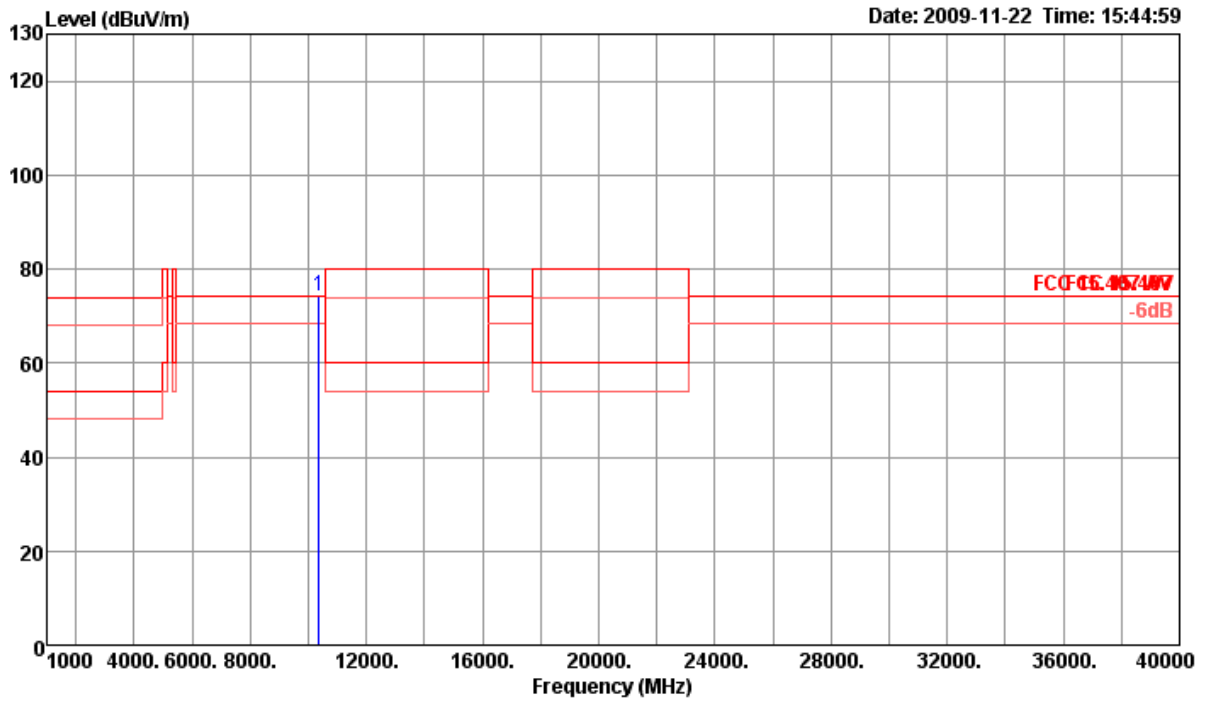


Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	PoI/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p 10358.00	74.22	74.30	-0.08	64.98	6.49	38.37	35.62	276	100	Peak	VERTICAL




Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a Ch 40, Ant. A + Ant. B

Horizontal

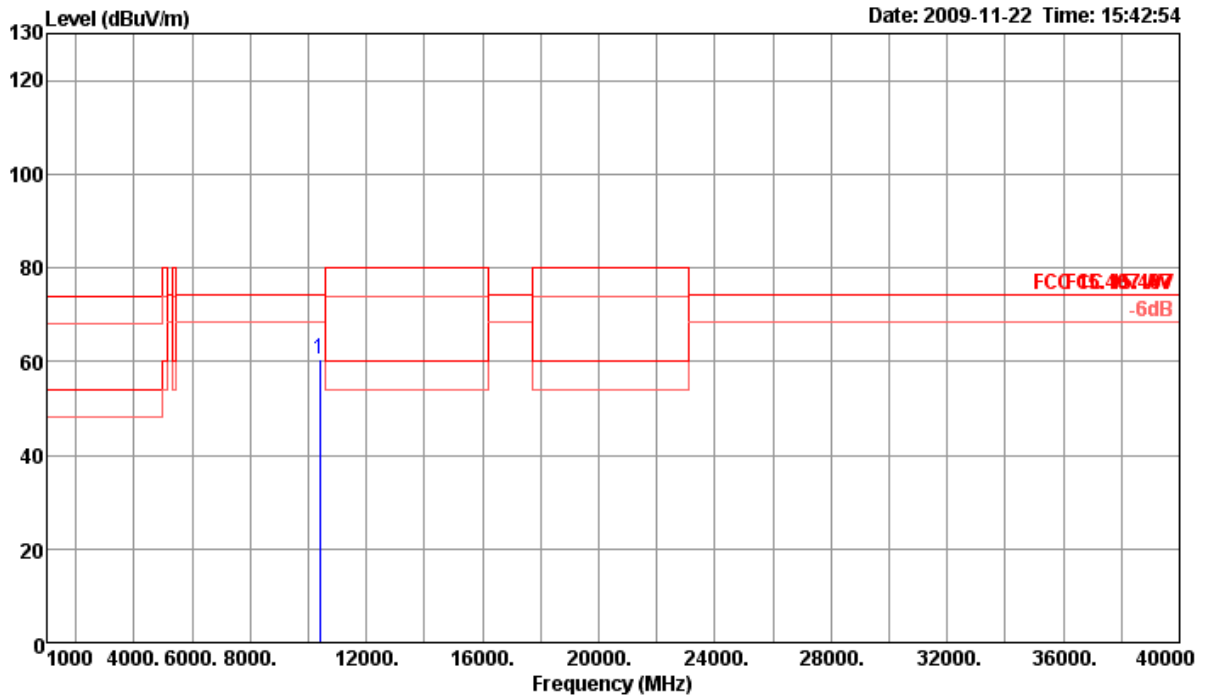

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	10402.60	60.39	74.30	-13.91	51.07	6.52	38.38	35.58	87	118	Peak	HORIZONTAL


Vertical

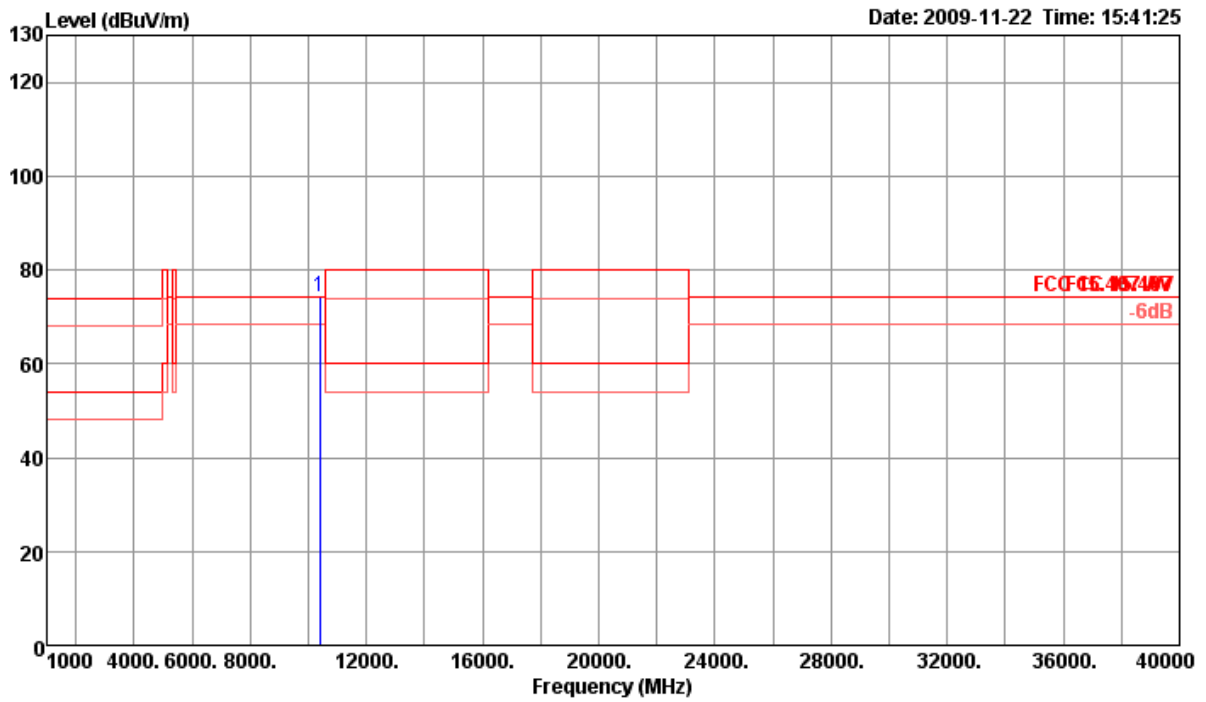

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p 10407.70	74.27	74.30	-0.03	64.95	6.52	38.38	35.58	276	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a Ch 48, Ant. A + Ant. B

Horizontal

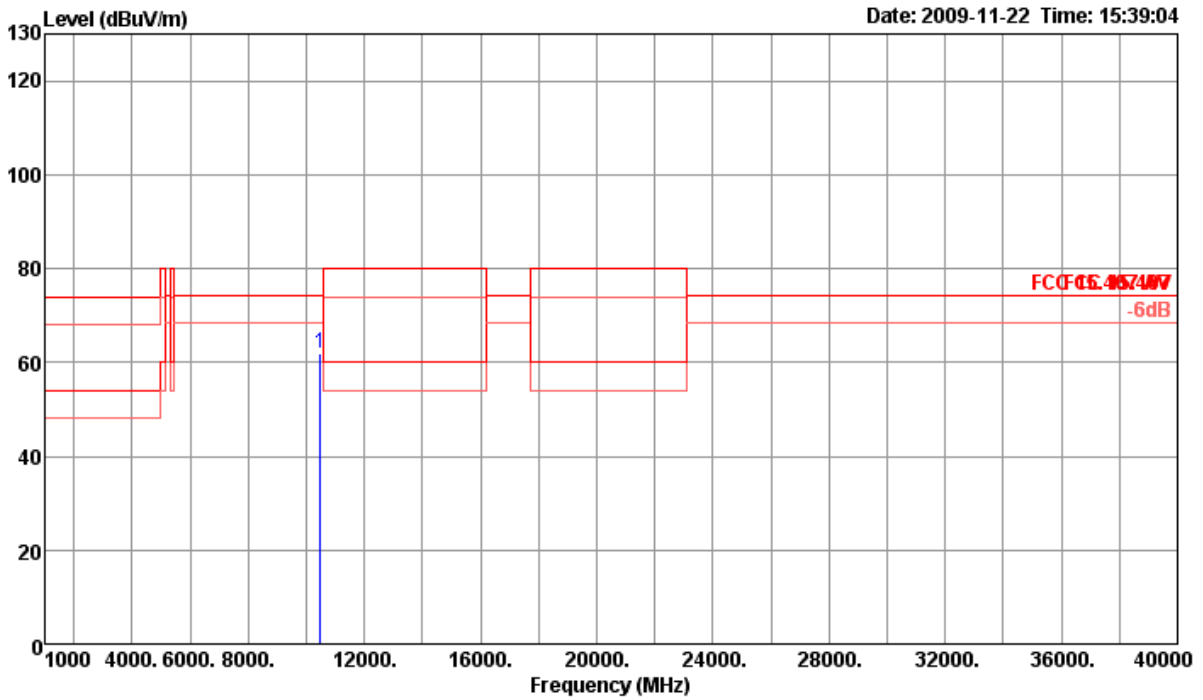

Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	PoI/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p 10477.90	61.89	74.30	-12.41	52.45	6.57	38.39	35.52	278	133	Peak	HORIZONTAL


Vertical

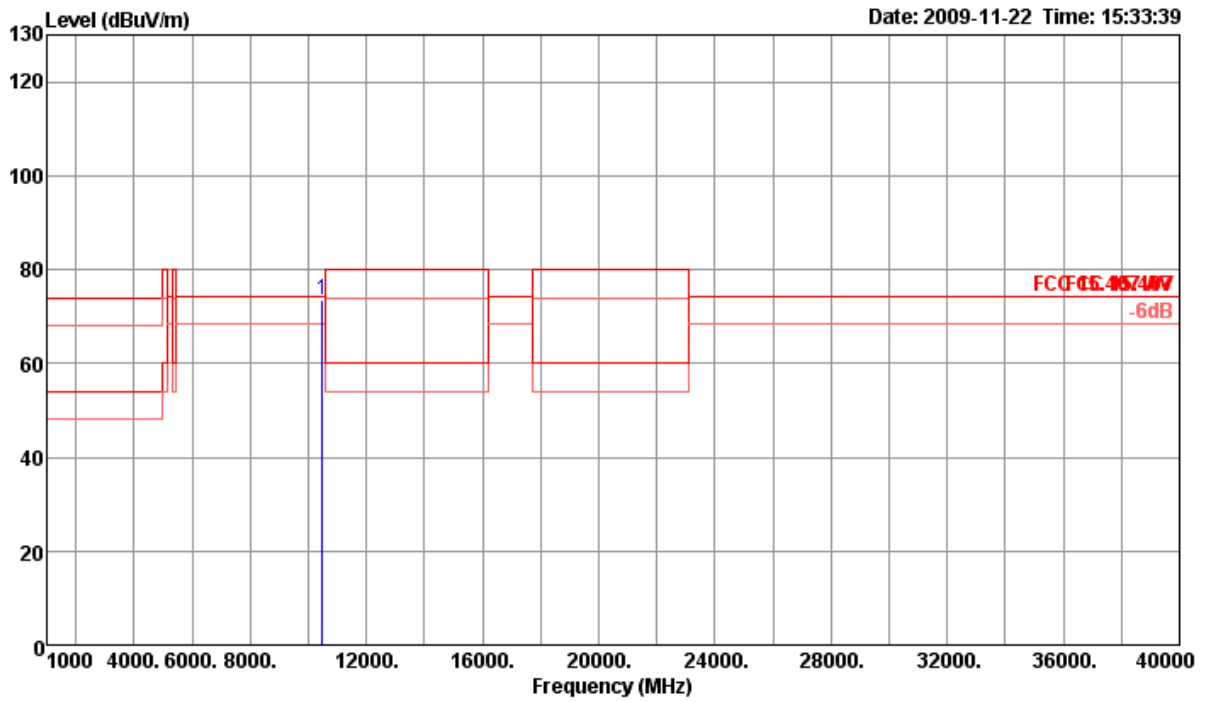

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	10482.50	73.39	74.30	-0.91	63.94	6.57	38.40	35.52	277	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a Ch 52, Ant. A + Ant. B

Horizontal

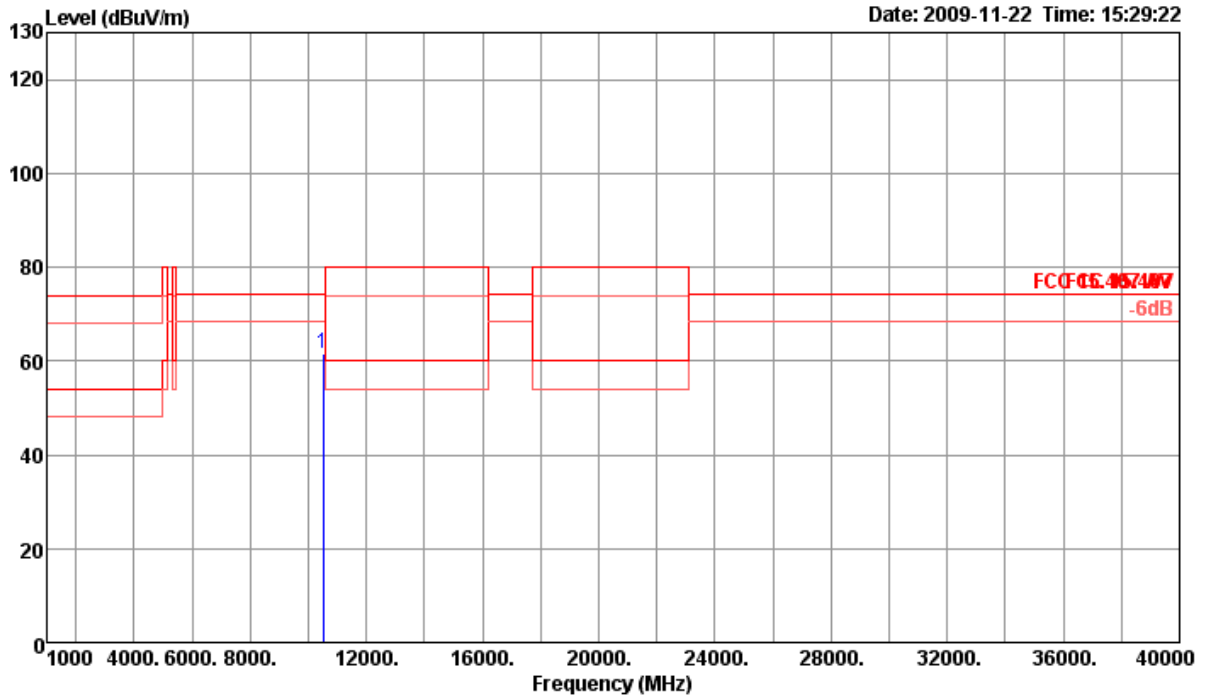

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	10517.40	61.64	74.30	-12.66	52.16	6.58	38.40	35.50	139	115	Peak	HORIZONTAL


Vertical

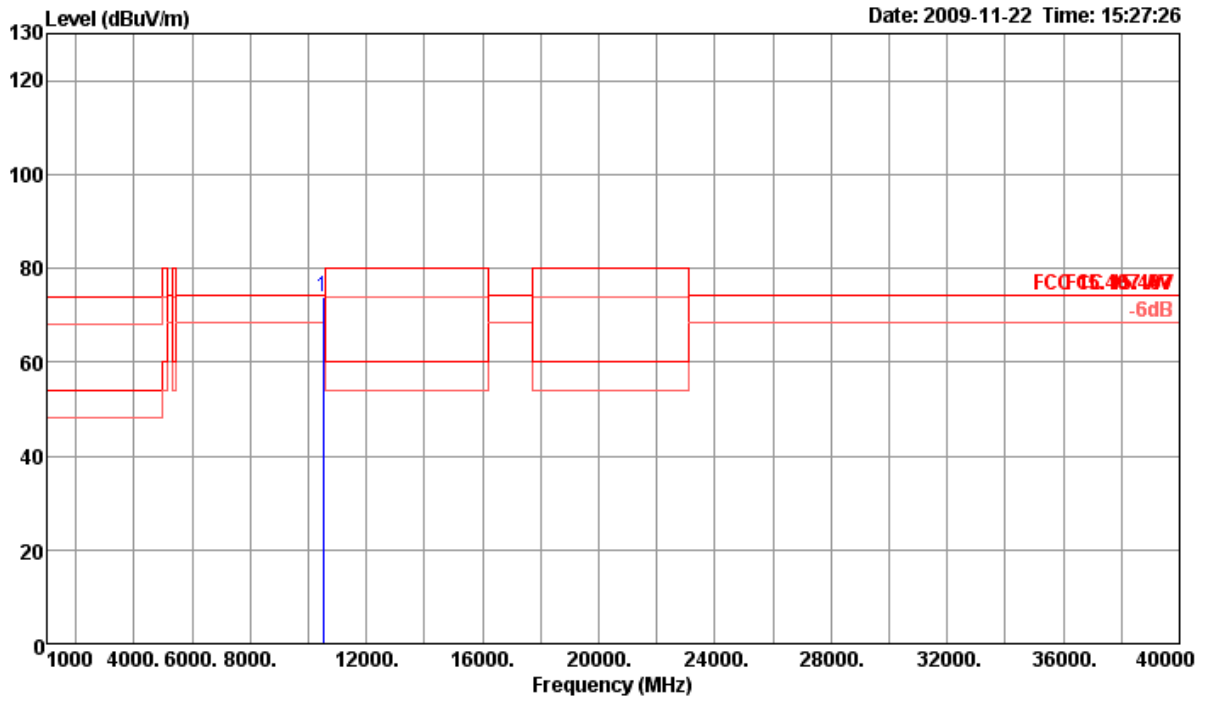

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	10517.20	73.84	74.30	-0.46	64.37	6.58	38.39	35.50	276	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a Ch 60, Ant. A + Ant. B

Horizontal

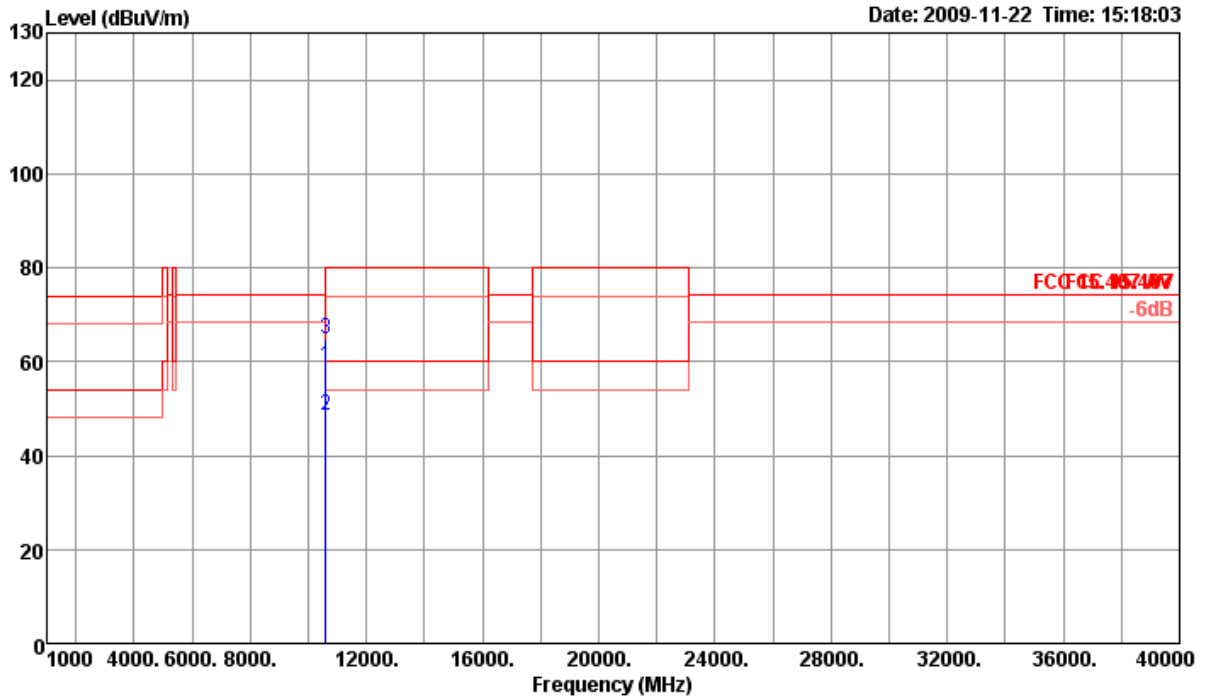

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10596.30	58.98	74.30	-15.32	49.43	6.61	38.38	35.44	291	118	Peak	HORIZONTAL
2 a	10601.70	48.59	60.00	-11.41	39.02	6.61	38.38	35.42	291	118	Average	HORIZONTAL
3 p	10602.50	64.89	80.00	-15.11	55.32	6.61	38.38	35.42	291	118	Peak	HORIZONTAL


Vertical

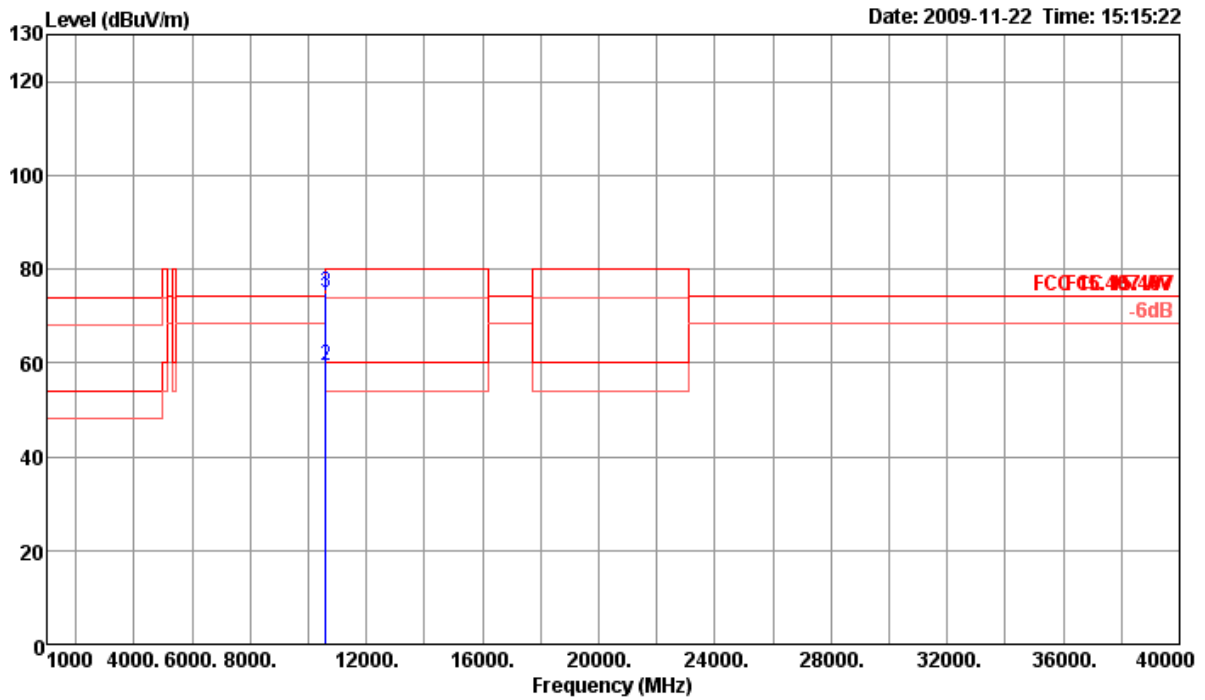

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	10597.70	74.27	74.30	-0.03	64.72	6.61	38.38	35.44	277	100	Peak	VERTICAL
2 a	10601.70	59.38	60.00	-0.62	49.81	6.61	38.38	35.42	277	100	Average	VERTICAL
3 !	10602.10	74.84	80.00	-5.16	65.27	6.61	38.38	35.42	277	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a Ch 64, Ant. A + Ant. B

Horizontal

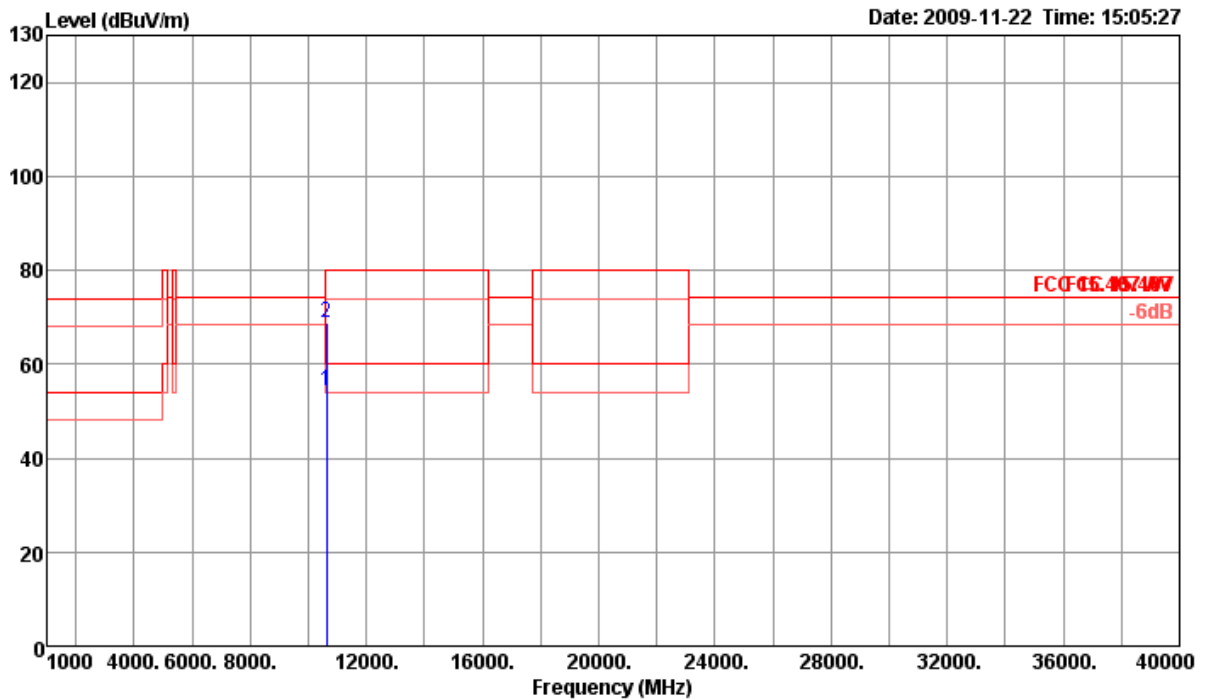

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	10636.80	54.48	60.00	-5.52	44.88	6.62	38.37	35.39	31	136	Average	HORIZONTAL
2 p	10637.60	68.96	80.00	-11.04	59.36	6.62	38.37	35.39	31	136	Peak	HORIZONTAL


Vertical

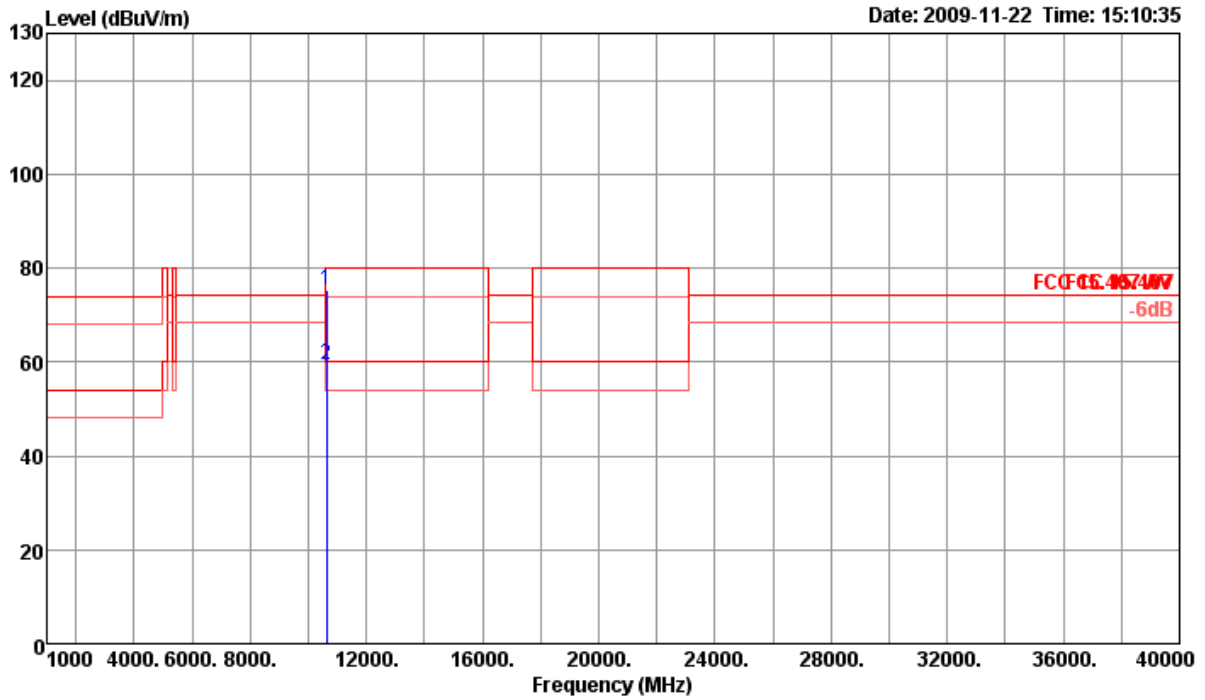

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	10641.80	75.46	80.00	-4.54	65.86	6.62	38.37	35.39	277	100	Peak	VERTICAL
2 a	10641.90	59.41	60.00	-0.59	49.81	6.62	38.37	35.39	277	100	Average	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a Ch 100, Ant. A + Ant. B

Horizontal

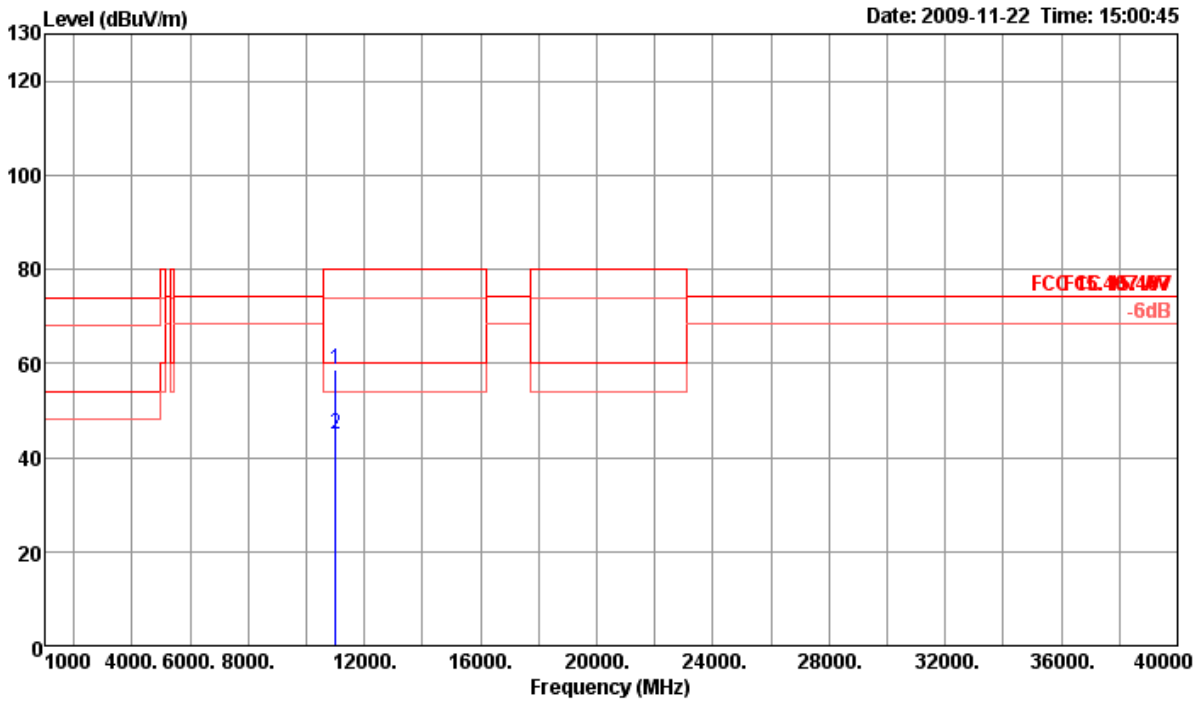

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	11000.30	58.55	80.00	-21.45	48.59	6.74	38.32	35.10	166	123	Peak	HORIZONTAL
2 a	11001.00	45.02	60.00	-14.98	35.06	6.74	38.32	35.10	166	123	Average	HORIZONTAL


Vertical

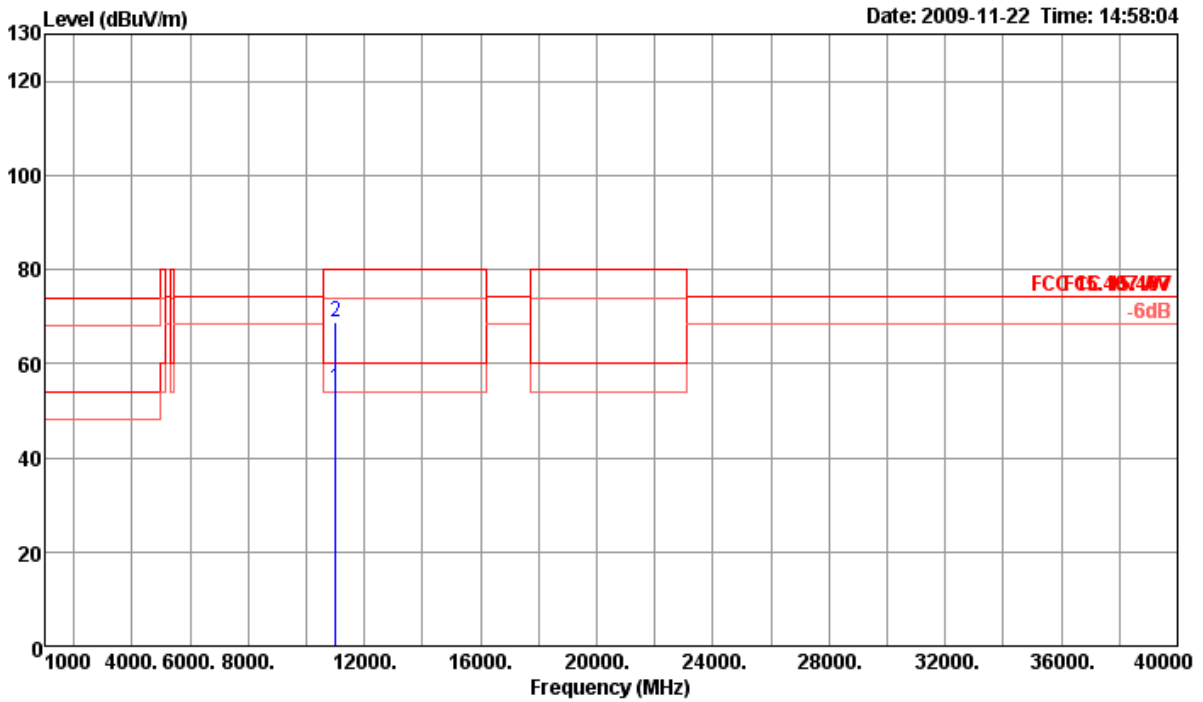

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	11000.30	54.81	60.00	-5.19	44.87	6.74	38.30	35.10	276	100	Average	VERTICAL
2 p	11010.00	68.67	80.00	-11.33	58.72	6.74	38.32	35.11	276	100	Peak	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a Ch 116, Ant. A + Ant. B

Horizontal

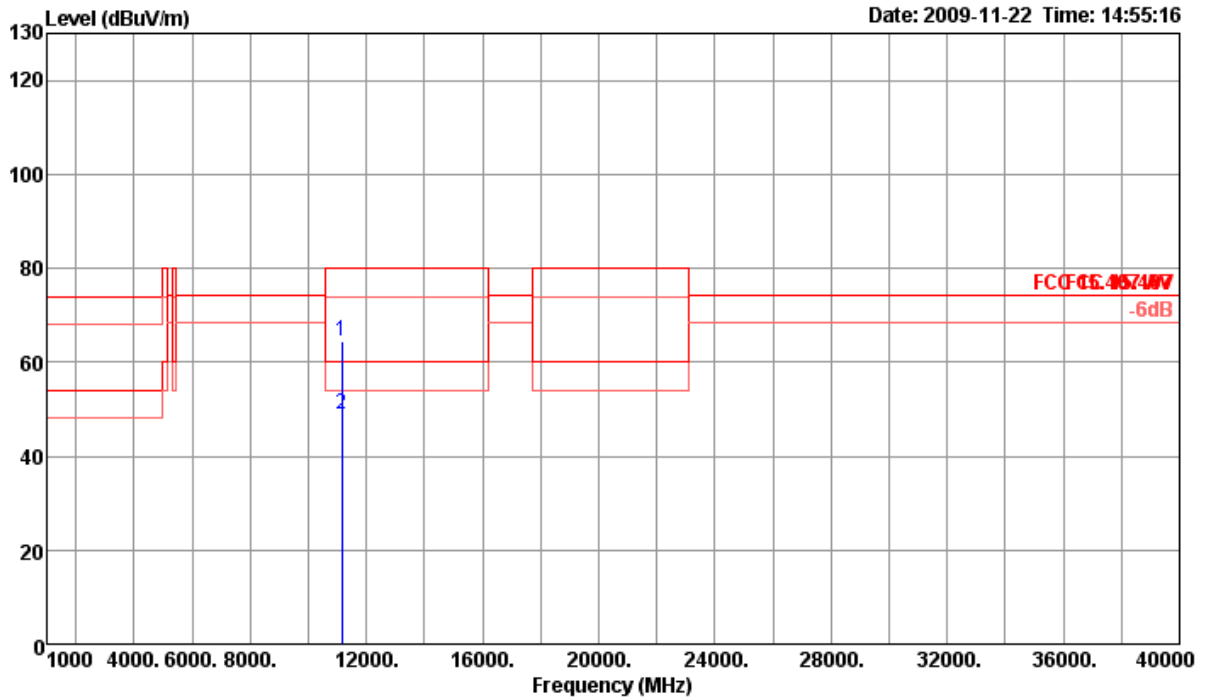

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	11155.40	64.59	80.00	-15.41	54.56	6.74	38.45	35.16	83	116	Peak	HORIZONTAL
2 a	11156.20	48.91	60.00	-11.09	38.88	6.74	38.45	35.16	83	116	Average	HORIZONTAL


Vertical

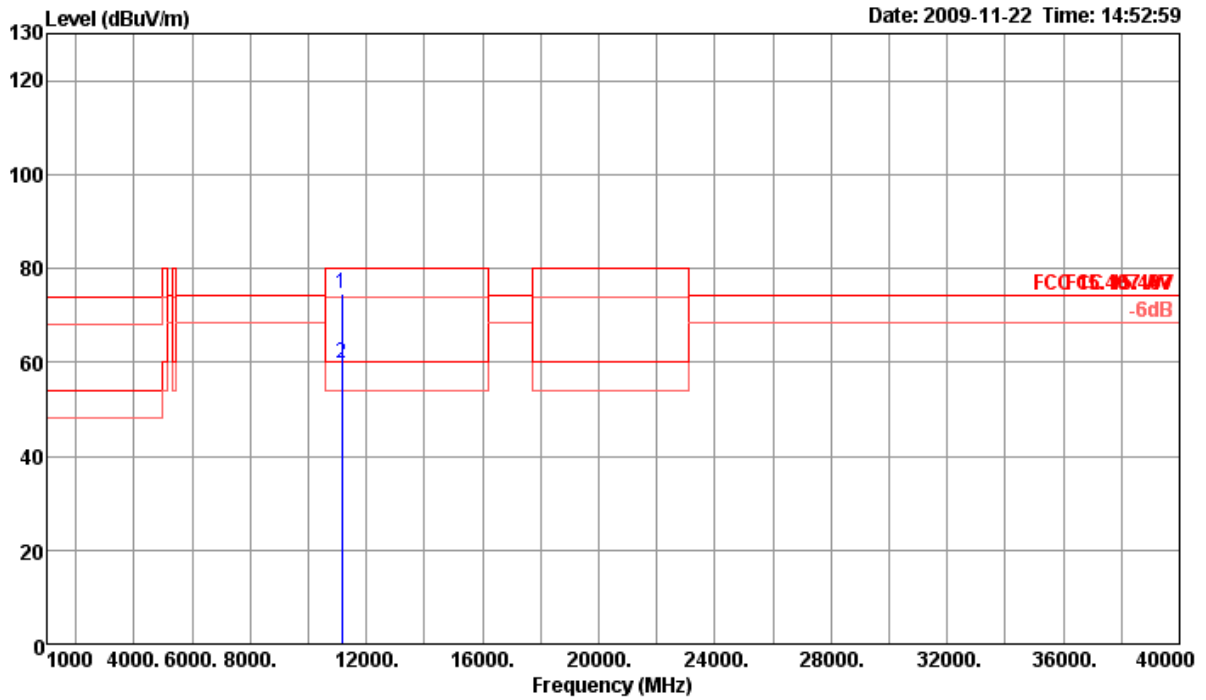

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	11159.50	74.62	80.00	-5.38	64.58	6.74	38.47	35.17	279	100	Peak	VERTICAL
2 a	11160.40	59.70	60.00	-0.30	49.66	6.74	38.47	35.17	279	100	Average	VERTICAL


Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a Ch 140, Ant. A + Ant. B

Horizontal

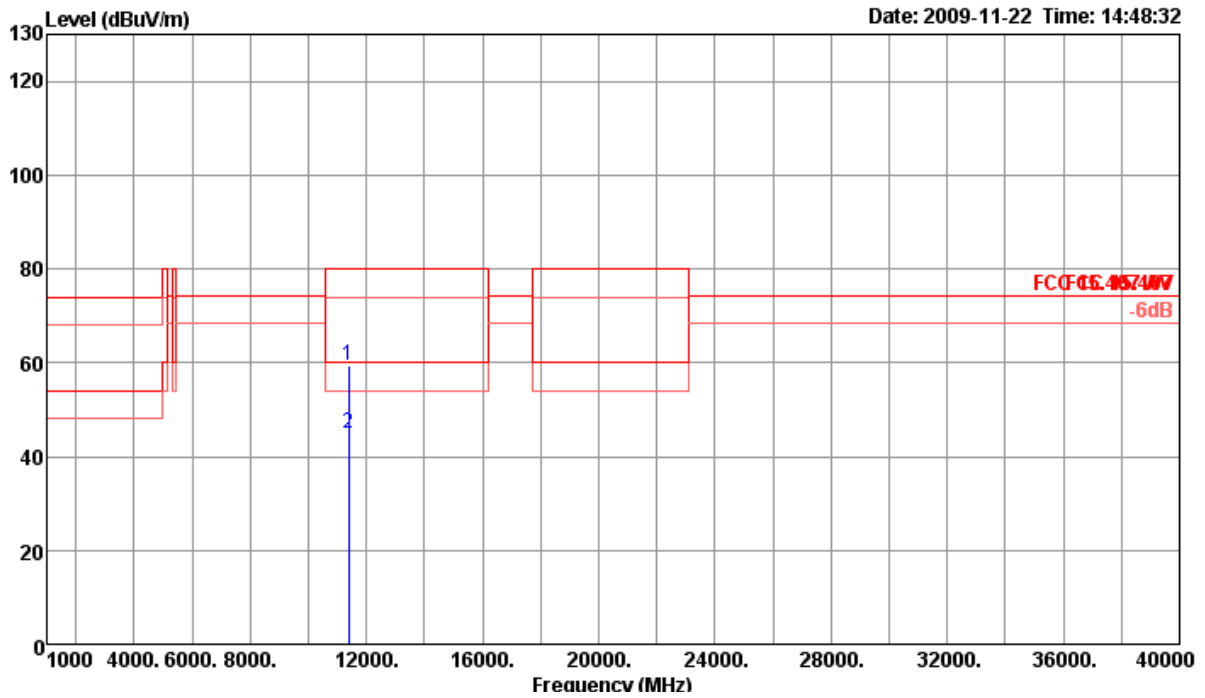

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	11395.20	59.48	80.00	-20.52	49.31	6.74	38.68	35.25	84	118	Peak	HORIZONTAL
2 a	11400.70	44.77	60.00	-15.23	34.58	6.74	38.70	35.25	84	118	Average	HORIZONTAL

Vertical

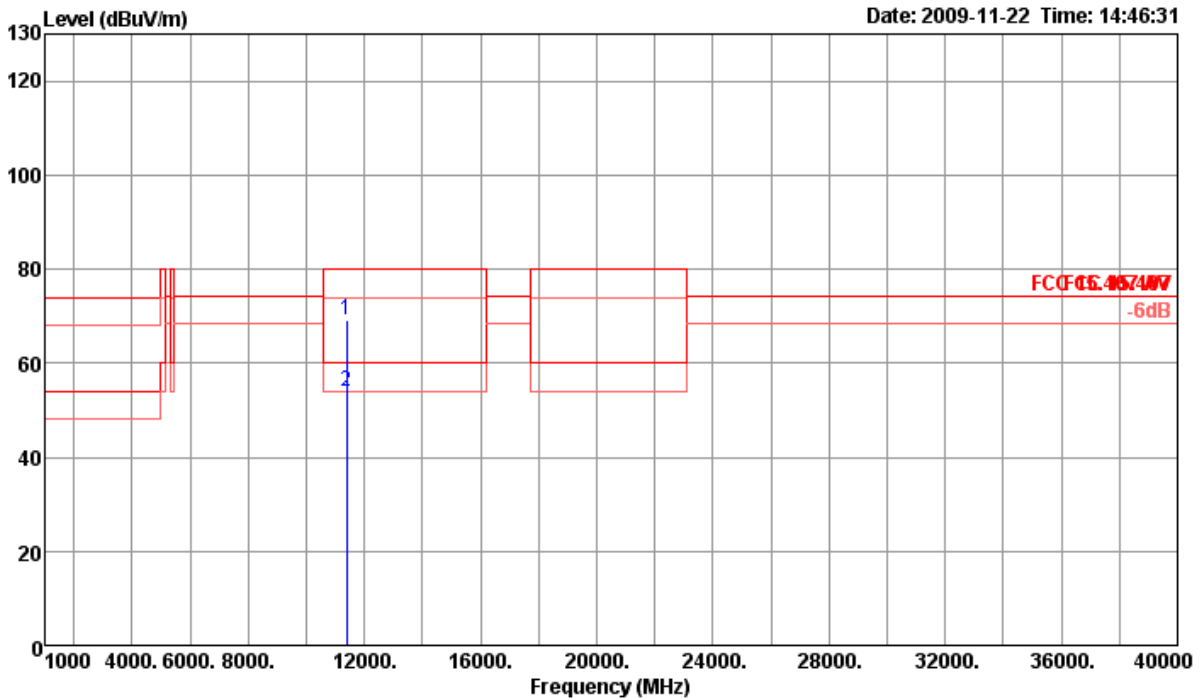

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	11395.80	69.27	80.00	-10.73	59.10	6.74	38.68	35.25	96	100	Peak	VERTICAL
2 a	11399.80	53.88	60.00	-6.12	43.69	6.74	38.70	35.25	96	100	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, in case the emission falls within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz / 1 MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 20MHz Ch 36, 40, Ant. A + Ant. B
Test Date	Nov. 24, 2009		

Channel 36

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	5149.00	68.42	80.00	-11.58	32.26	3.09	0.00	33.07	91	120	Peak	VERTICAL
2 !	5150.00	55.39	60.00	-4.61	19.23	3.09	0.00	33.07	91	120	Average	VERTICAL
3 a	5185.20	103.41	74.30			3.10	0.00	33.13	91	120	Average	VERTICAL
4 p	5187.80	114.69	74.30			3.10	0.00	33.13	91	120	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	5146.80	67.45	80.00	-12.55	31.29	3.09	0.00	33.07	89	110	Peak	VERTICAL
2 !	5150.00	55.03	60.00	-4.97	18.87	3.09	0.00	33.07	89	110	Average	VERTICAL
3 a	5193.60	104.12	74.30			3.10	0.00	33.16	89	110	Average	VERTICAL
4 p	5194.80	114.50	74.30			3.11	0.00	33.16	89	110	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.



Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 20MHz Ch 60, 64, Ant. A + Ant. B
Test Date	Nov. 24, 2009		

Channel 60

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	5300.80	106.15	74.30			3.14	0.00	33.34	99	109	Average	VERTICAL
2 p	5305.20	118.01	74.30			3.14	0.00	33.34	99	109	Peak	VERTICAL
3 !	5350.00	55.74	60.00	-4.26	19.15	3.16	0.00	33.43	99	109	Average	VERTICAL
4	5352.80	68.50	80.00	-11.50	31.91	3.16	0.00	33.43	99	109	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	5323.20	107.07	74.30			3.15	0.00	33.37	253	110	Average	VERTICAL
2 p	5325.60	118.95	74.30			3.15	0.00	33.37	253	110	Peak	VERTICAL
3 !	5350.40	56.97	60.00	-3.03	20.38	3.16	0.00	33.43	253	110	Average	VERTICAL
4	5351.40	72.46	80.00	-7.54	35.87	3.16	0.00	33.43	253	110	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.



Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 20MHz Ch 100, 140, Ant. A + Ant. B
Test Date	Nov. 24, 2009		

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	5459.80	70.89	80.00	-9.11	34.09	3.19	0.00	33.61	100	112	Peak	VERTICAL
2 !	5460.00	58.16	60.00	-1.84	21.36	3.19	0.00	33.61	100	112	Average	VERTICAL
3 !	5468.60	74.18	74.30	-0.12	37.35	3.19	0.00	33.64	100	112	Peak	VERTICAL
4 a	5492.20	107.84	74.30			3.20	0.00	33.67	100	112	Average	VERTICAL
5 p	5495.00	119.84	74.30			3.20	0.00	33.67	100	112	Peak	VERTICAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	5692.40	108.47	74.30			3.22	0.00	34.27	98	106	Average	VERTICAL
2 p	5703.60	120.85	74.30			3.22	0.00	34.32	98	106	Peak	VERTICAL
3 !	5725.20	74.12	74.30	-0.18	36.52	3.23	0.00	34.37	98	106	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 40MHz Ch 38, 46, Ant. A + Ant. B
Test Date	Nov. 24, 2009		

Channel 38

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5150.00	59.81	60.00	-0.19	23.65	3.09	0.00	33.07	100	112	Average	VERTICAL
2	5150.00	73.44	80.00	-6.56	37.28	3.09	0.00	33.07	100	112	Peak	VERTICAL
3 a	5173.60	100.66	74.30			3.10	0.00	33.13	100	112	Average	VERTICAL
4 p	5192.80	113.03	74.30			3.10	0.00	33.16	100	112	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	5137.20	68.23	80.00	-11.77	32.11	3.08	0.00	33.04	100	114	Peak	VERTICAL
2 !	5150.00	55.28	60.00	-4.72	19.12	3.09	0.00	33.07	100	114	Average	VERTICAL
3 a	5241.60	101.40	74.30			3.12	0.00	33.25	100	114	Average	VERTICAL
4 p	5244.40	113.64	74.30			3.12	0.00	33.25	100	114	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.



Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 40MHz Ch 54, 62, Ant. A + Ant. B
Test Date	Nov. 24, 2009		

Channel 54

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	5256.80	101.62	74.30			3.12	0.00	33.25	98	118	Average	VERTICAL
2 p	5274.00	114.63	74.30			3.13	0.00	33.28	98	118	Peak	VERTICAL
3 !	5350.00	55.54	60.00	-4.46	18.95	3.16	0.00	33.43	98	118	Average	VERTICAL
4	5358.40	68.31	80.00	-11.69	31.72	3.16	0.00	33.43	98	118	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	5296.80	100.68	74.30			3.14	0.00	33.34	92	116	Average	VERTICAL
2 p	5300.40	112.92	74.30			3.14	0.00	33.34	92	116	Peak	VERTICAL
3 !	5350.04	59.09	60.00	-0.91	22.50	3.16	0.00	33.43	92	116	Average	VERTICAL
4	5351.20	73.62	80.00	-6.38	37.03	3.16	0.00	33.43	92	116	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n MCS0 40MHz Ch 102, 110, 134 , Ant. A + Ant. B
Test Date	Nov. 24, 2009		

Channel 102

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	5458.80	71.78	80.00	-8.22	34.98	3.19	0.00	33.61	98	119	Peak	VERTICAL
2 !	5460.00	56.34	60.00	-3.66	19.54	3.19	0.00	33.61	98	119	Average	VERTICAL
3 !	5469.60	73.46	74.30	-0.84	36.63	3.19	0.00	33.64	98	119	Peak	VERTICAL
4 p	5512.80	114.77	74.30			3.20	0.00	33.70	98	119	Peak	VERTICAL
5 a	5516.40	101.15	74.30			3.20	0.00	33.75	98	119	Average	VERTICAL

Item 4, 5 are the fundamental frequency at 5510MHz.

Channel 110

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	5457.60	73.87	80.00	-6.13	37.07	3.19	0.00	33.61	92	112	Peak	VERTICAL
2 !	5460.00	58.37	60.00	-1.63	21.57	3.19	0.00	33.61	92	112	Average	VERTICAL
3 !	5466.80	73.55	74.30	-0.75	36.72	3.19	0.00	33.64	92	112	Peak	VERTICAL
4 a	5535.60	107.54	74.30			3.21	0.00	33.80	92	112	Average	VERTICAL
5 p	5541.20	121.30	74.30			3.21	0.00	33.80	92	112	Peak	VERTICAL

Item 4, 5 are the fundamental frequency at 5550 MHz.

Channel 134

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	5655.20	118.66	74.30			3.22	0.00	34.17	251	110	Peak	VERTICAL
2 a	5678.00	105.66	74.30			3.22	0.00	34.22	251	110	Average	VERTICAL
3 !	5728.60	74.27	74.30	-0.03	36.67	3.23	0.00	34.37	251	110	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5670 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].



Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a Ch 36, 40, Ant. A + Ant. B
Test Date	Nov. 22, 2009		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5148.60	68.75	80.00	-11.25	31.02	4.06	33.67	0.00	173	99	Peak	VERTICAL
2 !	5150.00	55.75	60.00	-4.25	18.02	4.06	33.67	0.00	173	99	Average	VERTICAL
3 p	5183.20	114.09	74.30			4.08	33.73	0.00	173	99	Peak	VERTICAL
4 a	5183.80	103.06	74.30			4.08	33.73	0.00	173	99	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5146.40	68.03	80.00	-11.97	30.30	4.06	33.67	0.00	267	111	Peak	VERTICAL
2 !	5146.80	55.79	60.00	-4.21	18.06	4.06	33.67	0.00	267	111	Average	VERTICAL
3 a	5194.00	105.83	74.30			4.09	33.73	0.00	267	111	Average	VERTICAL
4 p	5196.00	115.63	74.30			4.09	33.76	0.00	267	111	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.



Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a Ch 60, 64, Ant. A + Ant. B
Test Date	Nov. 22, 2009		

Channel 60

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 a	5293.20	103.35	74.30			4.14	33.91	0.00	183	104 Average	VERTICAL
2 p	5297.60	114.97	74.30			4.14	33.94	0.00	183	104 Peak	VERTICAL
3 !	5350.00	55.68	60.00	-4.32	17.48	4.17	34.03	0.00	183	104 Average	VERTICAL
4	5351.20	68.60	80.00	-11.40	30.40	4.17	34.03	0.00	183	104 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 a	5324.20	103.64	74.30			4.16	33.97	0.00	225	103 Average	VERTICAL
2 p	5327.20	115.26	74.30			4.16	33.97	0.00	225	103 Peak	VERTICAL
3 !	5350.00	56.00	60.00	-4.00	17.80	4.17	34.03	0.00	225	103 Average	VERTICAL
4	5353.00	71.84	80.00	-8.16	33.64	4.17	34.03	0.00	225	103 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.



Temperature	24°C	Humidity	52%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a Ch 100, 140, Ant. A + Ant. B
Test Date	Nov. 22, 2009		

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 !	5459.40	58.75	60.00	-1.25	20.31	4.23	34.21	0.00	89	108	Average	VERTICAL
2	5459.40	72.97	80.00	-7.03	34.53	4.23	34.21	0.00	89	108	Peak	VERTICAL
3 !	5469.80	73.44	74.30	-0.86	34.96	4.24	34.24	0.00	89	108	Peak	VERTICAL
4 p	5492.60	120.07	74.30			4.24	34.26	0.00	89	108	Peak	VERTICAL
5 a	5495.40	109.21	74.30			4.26	34.26	0.00	89	108	Average	VERTICAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	5692.60	120.21	74.30			4.36	34.34	0.00	89	115	Peak	VERTICAL
2 a	5694.80	108.45	74.30			4.36	34.34	0.00	89	115	Average	VERTICAL
3 !	5725.40	74.11	74.30	-0.19	35.38	4.39	34.34	0.00	89	115	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.8. Frequency Stability Measurement

4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or $\pm 20\text{ppm}$ (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than $\pm 20\text{ppm}$ (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.
8. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

4.8.4. Test Setup Layout

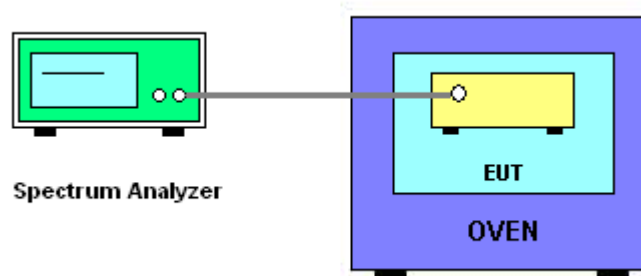

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)	
	5200	5300
(V)		
126.50	5199.986800	5299.998000
110.00	5200.008700	5300.010000
93.50	5200.038600	5300.045000
Max. Deviation (MHz)	0.038600	0.045000
Max. Deviation (ppm)	7.42	8.49

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)	
	5200	5300
(°C)		
-30	5200.032900	5300.035800
-20	5200.028700	5300.033000
-10	5200.019900	5300.024600
0	5200.015800	5300.021600
10	5200.004600	5300.001200
20	5199.998700	5299.999800
30	5199.994500	5299.996800
40	5199.991300	5299.994600
50	5199.991200	5299.993300
Max. Deviation (MHz)	0.032900	0.035800
Max. Deviation (ppm)	6.33	6.7547

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2009	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2009	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2009	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Jun. 11, 2009	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 07, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 23, 2009	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2009	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2009*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100305	9 kHz - 40 GHz	Feb. 03, 2009	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Sep. 26, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2009	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.16, 2009	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2009	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Feb. 13, 2009	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 25, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: *Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection : Accreditation Program for Telecommunication Equipment Testing Laboratory


Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.