

Company: MikroTik

Test of: RBD52G-5HacD2HnD-TC

To: FCC Part 15 Subpart E 15.407 & RSS-247

Report No.: MIKO65-U6 Rev A

COMPLETE TEST REPORT





Test of: MikroTik RBD52G-5HacD2HnD-TC

To: FCC Part 15 Subpart E 15.407 & RSS-247

Test Report Serial No.: MIKO65-U6 Rev A

This report supersedes: NONE

Applicant: MikroTik
Aizkraukles iela 23
Riga, LV-1006
Latvia

Product function: 802.11b/g/n/ac wireless router

Issue Date: 22nd December 2017

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Table of Contents

| | |
|---|-----------|
| 1. ACCREDITATION, LISTINGS & RECOGNITION..... | 5 |
| 1.1. TESTING ACCREDITATION..... | 5 |
| 1.2. RECOGNITION | 6 |
| 1.3. PRODUCT CERTIFICATION | 7 |
| 2. DOCUMENT HISTORY | 8 |
| 3. TEST RESULT CERTIFICATE..... | 9 |
| 4. REFERENCES AND MEASUREMENT UNCERTAINTY | 10 |
| 4.1. Normative References..... | 10 |
| 4.2. Test and Uncertainty Procedure..... | 12 |
| 5. PRODUCT DETAILS AND TEST CONFIGURATIONS..... | 13 |
| 5.1. Technical Details | 13 |
| 5.2. Scope Of Test Program..... | 14 |
| 5.3. Equipment Model(s) and Serial Number(s)..... | 15 |
| 5.4. Antenna Details | 15 |
| 5.5. Cabling and I/O Ports | 15 |
| 5.6. Test Configurations..... | 16 |
| 5.7. Equipment Modifications | 16 |
| 5.8. Deviations from the Test Standard | 16 |
| 6. TEST SUMMARY | 17 |
| 7. TEST EQUIPMENT CONFIGURATION(S) | 18 |
| 7.1. Conducted | 18 |
| 7.1. Radiated Emissions - 3m Chamber..... | 20 |
| 7.2. AC Wireline Emissions | 23 |
| 8. MEASUREMENT AND PRESENTATION OF TEST DATA | 25 |
| 9. TEST RESULTS | 26 |
| 9.1. Peak Transmit Power | 26 |
| 9.2. 26 dB & 99% Bandwidth..... | 32 |
| 9.3. 6 dB & 99% Bandwidth..... | 37 |
| 9.4. Power Spectral Density | 42 |
| 9.5. Radiated | 52 |
| 9.5.1. <i>TX Spurious & Restricted Band Emissions</i> | 55 |
| 5150 - 5250 MHz..... | 55 |
| 5725 - 5850 MHz..... | 58 |
| 9.5.2. <i>Restricted Edge & Band-Edge Emissions</i> | 61 |
| 5150 - 5250 MHz..... | 62 |
| 5725 - 5850 MHz..... | 66 |
| Lower Band-Edge..... | 66 |
| Higher Band-Edge | 70 |
| 9.5.3. <i>Digital Emissions</i> | 74 |
| 9.5.4. <i>AC Wireline Emissions</i> | 78 |
| A. APPENDIX - GRAPHICAL IMAGES | 81 |
| A.1. 26 dB & 99% Bandwidth | 82 |
| A.2. 6 dB & 99% Bandwidth | 100 |
| A.3. Power Spectral Density..... | 120 |
| A.4. Radiated | 176 |
| A.4.1. <i>TX Spurious & Restricted Band Emissions</i> | 176 |
| A.4.2. <i>Restricted Edge & Band-Edge Emissions</i> | 182 |
| 5150 - 5250 MHz..... | 182 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 4 of 198

| | |
|---|-----|
| <i>5725 - 5850 MHz</i> | 186 |
| <i>Lower Band-Edge</i> | 186 |
| <i>Higher Band-Edge</i> | 190 |
| <i>A.4.3. Digital Emissions</i> | 194 |
| <i>A.4.4. AC Wireline Emissions</i> | 196 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 6 of 198

1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

| Country | Recognition Body | Status | Phase | Identification No. |
|-----------|--|--------|------------|---|
| USA | Federal Communications Commission (FCC) | TCB | - | US0159 Listing #: 102167 |
| Canada | Industry Canada (IC) | FCB | APEC MRA 2 | US0159 Listing #: 4143A-2 4143A-3 |
| Japan | MIC (Ministry of Internal Affairs and Communication) | CAB | APEC MRA 2 | RCB 210 |
| | VCCI | -- | -- | A-0012 |
| Europe | European Commission | NB | EU MRA | NB 2280 |
| Australia | Australian Communications and Media Authority (ACMA) | CAB | APEC MRA 1 | US0159 |
| Hong Kong | Office of the Telecommunication Authority (OFTA) | CAB | APEC MRA 1 | |
| Korea | Ministry of Information and Communication Radio Research Laboratory (RRL) | CAB | APEC MRA 1 | |
| Singapore | Infocomm Development Authority (IDA) | CAB | APEC MRA 1 | |
| Taiwan | National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI) | CAB | APEC MRA 1 | |
| Vietnam | Ministry of Communication (MIC) | CAB | APEC MRA 1 | |

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 7 of 198

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)

Industry Canada – Certification Body, CAB Identifier – US0159

Europe – Notified Body (NB), NB Identifier - 2280

Japan – Recognized Certification Body (RCB), RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 8 of 198

2. DOCUMENT HISTORY

| Document History | | |
|------------------|--------------------------------|--------------------------|
| Revision | Date | Comments |
| Draft | 13th December 2017 | Draft for client review. |
| Rev A | 22 nd December 2017 | Initial release. |
| . | | |
| . | | |
| . | | |
| . | | |
| . | | |

In the above table the latest report revision will replace all earlier versions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 9 of 198

3. TEST RESULT CERTIFICATE

| | |
|--|---|
| Manufacturer: MikroTik Aizkraukles iela 23 Riga LV 1006 Latvia | Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA |
| Model: MikroTik hAP ac | Telephone: +1 925 462 0304 |
| Type Of Equipment: WLAN Access Point | Fax: +1 925 462 0306 |
| S/N's: 8588078BA3C2 | |
| Test Date(s): 31 st October – 30 th November 2017 | Website: www.micomlabs.com |

| STANDARD(S) | TEST RESULTS |
|--|--------------------|
| FCC Part 15 Subpart E 15.407 & RSS-247 | EQUIPMENT COMPLIES |

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



Graeme Grieve
Quality Manager MiCOM Labs, Inc.

Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

| REF. | PUBLICATION | YEAR | TITLE |
|-------|------------------------|--------------------------------------|---|
| I | KDB 662911 D01 & D02 | Oct 31 2013 | Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band |
| II | KDB 905462 D07 v02 | 22nd August 2016 | Test guidance to demonstrate compliance for U-NII devices subject to DFS requirements. |
| III | KDB 926956 D01 v02 | 22nd August 2016 | U-NII Device Transition Plan |
| IV | KDB 789033 D02 v01r04 | 2nd May 2017 | Guidelines for compliance testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E) |
| V | A2LA | August 2017 | R105 - Requirement's When Making Reference to A2LA Accreditation Status |
| VI | ANSI C63.10 | 2013 | American National Standard for Testing Unlicensed Wireless Devices |
| VII | ANSI C63.4 | 2014 | American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| VIII | CISPR 32 | 2015 | Electromagnetic compatibility of multimedia equipment - Emission requirements |
| IX | ETSI TR 100 028 | 2001-12 | Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics |
| X | FCC 06-96 | Jun 30 2006 | Memorandum Opinion and Order |
| XI | FCC 47 CFR Part 15.407 | 2016 | Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices |
| XII | ICES-003 | Issue 6 Jan 2016; Updated April 2017 | Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement. |
| XIII | M 3003 | Edition 3 Nov.2012 | Expression of Uncertainty and Confidence in Measurements |
| XIV | RSS-247 Issue 2 | Feb 2017 | Digital Transmission Systems (DTs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices |
| XV | RSS-Gen Issue 4 | November 2014 | General Requirements and Information for the Certification of Radiocommunication Equipment |
| XVI | KDB 644545 D03 v01 | August 14th 2014 | Guidance for IEEE 802.11ac New Rules |
| XVII | FCC 47 CFR Part 2.1033 | 2016 | FCC requirements and rules regarding photographs and test setup diagrams. |
| XVIII | KDB 905462 D02 v02 | April 8 2016 | Compliance Measurement Procedures for Unlicensed National Information Infrastructure devices operating in |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 11 of 198

| | | | |
|--|--|--|--|
| | | | the 5250 to 5350 MHz and 5470 to 5725 MHz bands incorporating Dynamic Frequency Selection. |
|--|--|--|--|

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 12 of 198

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 13 of 198

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

| Details | Description |
|--------------------------------------|--|
| Purpose: | Test of the MikroTik RBD52G-5HacD2HnD-TC to FCC Part 15 Subpart E 15.407 & RSS-247. |
| Applicant: | MikroTik Aizkraukles iela 23 Riga LV 1006 Latvia |
| Manufacturer: | MikroTik |
| Laboratory performing the tests: | MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA |
| Test report reference number: | MIKO65-U6 Rev A |
| Date EUT received: | 30th October 2017 |
| Standard(s) applied: | FCC Part 15 Subpart E 15.407 & RSS-247 |
| Dates of test (from - to): | 31 st October – 30 th November 2017 |
| No of Units Tested: | 2 |
| Product Family Name: | RouterBOARD |
| Model(s): | RBD52G-5HacD2HnD-TC |
| Location for use: | Indoors |
| Declared Frequency Range(s): | 5150 - 5250 MHz; 5725 - 5850 MHz; |
| Type of Modulation: | OFDM |
| EUT Modes of Operation: | 802.11a, 802.11ac-80, 802.11n HT-20, 802.11n HT-40 |
| Declared Nominal Output Power (dBm): | 27.0 |
| Transmit/Receive Operation: | Transceiver Half Duplex |
| Rated Input Voltage and Current: | POE adaptor sold with unit 24 Vdc AC/DC adaptor sold with unit 24 Vdc |
| Operating Temperature Range: | Declared Range -20°C to 35°C |
| ITU Emission Designator: | 802.11a: 42M8D1D 802.11n HT-20: 43M6D1D 802.11n HT-40: 68M1D1D 802.11ac-80: 76M9D1D |
| Equipment Dimensions: | 34 mm x 119 mm x 99 mm |
| Weight: | 0.17 Kg |
| Hardware Rev: | r2 |
| Software Rev: | WinBox 6.40.4 on hAP ac^2(arm) |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5.2. Scope Of Test Program

MikroTik RBD52G-5HacD2HnD-TC

The scope of the test program was to test the MikroTik RBD52G-5HacD2HnD-TC configurations in the frequency ranges 5150 - 5250 MHz; 5725 - 5850 MHz; for compliance against the following specification:


FCC Part 15 Subpart E 15.407 & RSS-247

Compliance Measurement Procedures for Unlicensed National Information Infrastructure devices operating in the 5150 to 5250 MHz and 5725 to 5850 MHz bands.

Industry Canada RSS-247

This Radio Standard Specification sets out certification requirements for radio apparatus operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz employing frequency hopping, digital modulation and/or a combination (hybrid) of both techniques. It also includes licence-exempt local area network (LE-LAN) devices operating in the bands 5150-5250 MHz, 5250-5350 MHz, 5470-5725 MHz and 5725-5850 MHz as specified in SP-5150 MHz.

MikroTik RBD52G-5HacD2HnD-TC

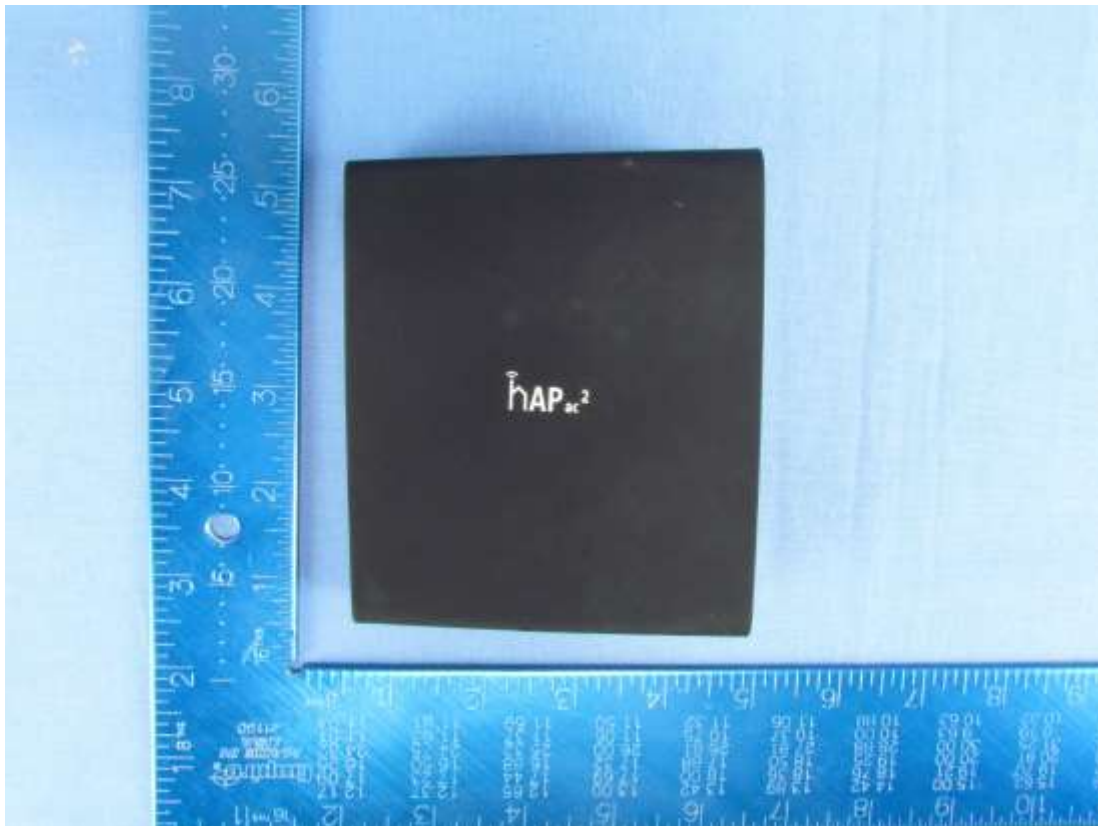

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 15 of 198

5.3. Equipment Model(s) and Serial Number(s)

| Type | Description | Manf | Model | Serial No. | Delivery Date |
|---------|--------------------------------|----------|---------------------|--------------|-------------------------------|
| EUT | 802.11b/g/n/ac wireless router | MikroTik | RBD52G-5HacD2HnD-TC | 8588078BA3C2 | 6 th November 2017 |
| Support | Laptop PC | DELL | E7450 | None | N/A |

5.4. Antenna Details

| Type | Manufacturer | Gain (dBi) | BF Gain | Dir BW | X-Pol | Frequency Band (MHz) |
|----------|--------------|------------|---------|--------|-------|----------------------|
| integral | Mikrotik | 2.5 | - | 360 | - | 5150 - 5250 |
| integral | Mikrotik | 2.5 | - | 360 | - | 5250 - 5350 |
| integral | Mikrotik | 2.5 | - | 360 | - | 5470 - 5725 |
| integral | Mikrotik | 2.5 | - | 360 | - | 5725 - 5850 |

BF Gain - Beamforming Gain
Dir BW - Directional BeamWidth
X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

| Port Type | Max Cable Length (m) | # of Ports | Screened | Conn Type | Data Type | Bit Rate |
|-----------|----------------------|------------|----------|------------|-------------|-------------|
| Ethernet | 3=<Cable<10 | 5 | -- | RJ45 | Packet Data | 10/100/1000 |
| USB | Cable <3 | 1 | -- | USB-Type A | Digital | -- |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 16 of 198

5.6. Test Configurations

Results for the following configurations are provided in this report:

| Operational Mode(s) | Data Rate with Highest Power MBit/s | Channel Frequency (MHz) | | |
|------------------------|-------------------------------------|-------------------------|---------|---------|
| | | Low | Mid | High |
| 5150 - 5250 MHz | | | | |
| 802.11a | 6.00 | 5180.00 | 5200.00 | 5240.00 |
| 802.11ac-80 | 29.30 | 5210.00 | -- | -- |
| 802.11n HT-20 | 6.50 | 5180.00 | 5200.00 | 5240.00 |
| 802.11n HT-40 | 13.50 | 5190.00 | -- | 5230.00 |
| 5725 - 5850 MHz | | | | |
| 802.11a | 6.00 | 5745.00 | 5785.00 | 5825.00 |
| 802.11ac-80 | 29.30 | 5775.00 | -- | -- |
| 802.11n HT-20 | 6.50 | 5745.00 | 5785.00 | 5825.00 |
| 802.11n HT-40 | 13.50 | 5755.00 | -- | 5795.00 |

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 17 of 198

6. TEST SUMMARY

List of Measurements

| Test Header | Result | Data Link |
|---|----------|---------------------------|
| Peak Transmit Power | Complies | View Data |
| 26 dB & 99% Bandwidth | Complies | View Data |
| 6 dB & 99% Bandwidth | Complies | View Data |
| Power Spectral Density | Complies | View Data |
| Radiated | Complies | - |
| TX Spurious & Restricted Band Emissions | Complies | View Data |
| Restricted Edge & Band-Edge Emissions | Complies | View Data |
| Digital Emissions | Complies | View Data |
| AC Wireline Emissions | Complies | View Data |


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7. TEST EQUIPMENT CONFIGURATION(S)

7.1. Conducted

Conducted RF Emission Test Set-up(s). The following tests were performed using the conducted test set-up shown in the diagram below.

1. Peak Transmit Power
2. 6 dB 99% Bandwidth
3. 26 dB 99% Bandwidth
4. Power Spectral Density

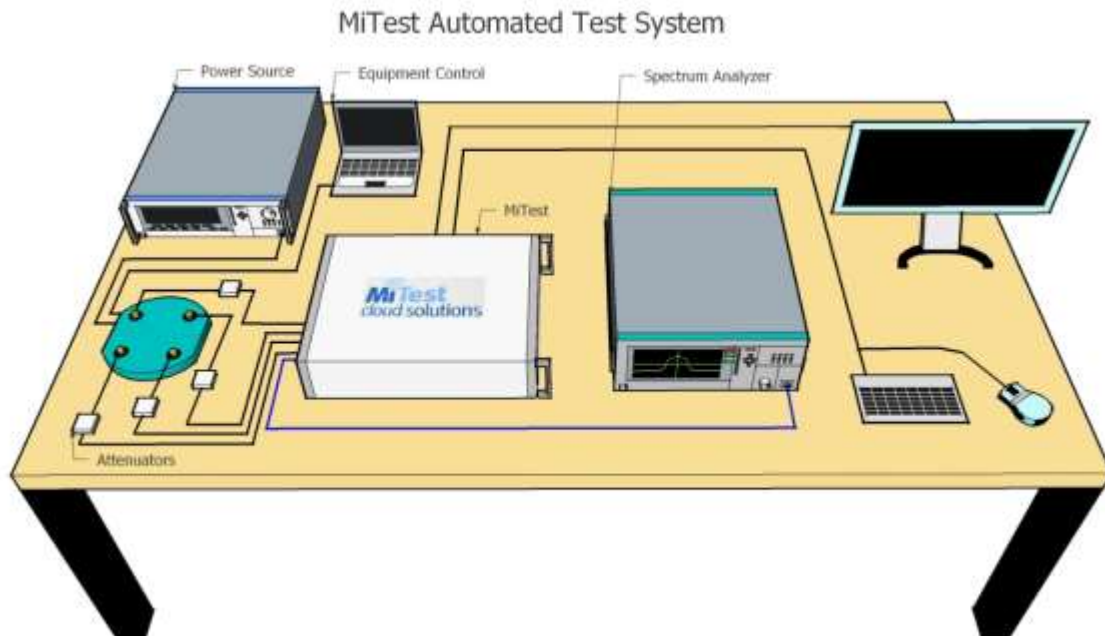

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

| Asset# | Description | Manufacturer | Model# | Serial# | Calibration Due Date |
|--------|--|-----------------|-----------|------------|----------------------|
| 127 | Power Supply | HP | 6674A | US36370530 | Cal when used |
| 158 | Barometer/Thermometer | Control Company | 4196 | E2846 | 30 Nov 2018 |
| 248 | Resistance Thermometer | Thermotronics | GR2105-02 | 9340 #1 | 30 Oct 2018 |
| 287 | Rohde & Schwarz 40 GHz Receiver | Rhode & Schwarz | ESIB40 | 100201 | 2 May 2018 |
| 376 | USB 10MHz - 18GHz Average Power Sensor | Agilent | U2000A | MY51440005 | 23 Oct 2018 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 19 of 198


| | | | | | |
|-------------|---|----------------------|----------------------|---------------|--------------|
| 381 | 4x4 RF Switch Box | MiCOM Labs | MiTest RF Switch Box | MIC002 | 8 Mar 2018 |
| 398 | MiTest RF Conducted Test Software | MiCOM | MiTest ATS | Version 4.1 | Not Required |
| 419 | Laptop with Labview Software | Lenova | W520 | TS02 | Not Required |
| 420 | USB to GPIB Interface | National Instruments | GPIB-USB HS | 1346738 | Not Required |
| 440 | USB Wideband Power Sensor | Boonton | 55006 | 9178 | 22 Sep 2018 |
| 442 | USB Wideband Power Sensor | Boonton | 55006 | 9181 | 6 Oct 2018 |
| 445 | PoE Injector | D-Link | DPE-101GL | QTAH1E2000625 | Not Required |
| 460 | Dell Computer with installation of MiTest executable. | Dell | Optiplex330 | BC944G1 | Not Required |
| 461 | Spectrum Analyzer | Agilent | E4440A | MY46185537 | 20 Sep 2018 |
| 493 | USB Wideband Power Sensor | Boonton | 55006 | 9634 | 10 Mar 2018 |
| 494 | USB Wideband Power Sensor | Boonton | 55006 | 9726 | 10 Mar 2018 |
| 74 | Environmental Chamber Chamber 3 | Tenney | TTC | 12808-1 | 28 Sep 2018 |
| RF#2 GPIB#1 | GPIB cable to Power Supply | HP | GPIB | None | Not Required |
| RF#2 SMA#1 | EUT to Mitest box port 1 | Flexco | SMA Cable port1 | None | 8 Mar 2018 |
| RF#2 SMA#2 | EUT to Mitest box port 2 | Flexco | SMA Cable port2 | None | 8 Mar 2018 |
| RF#2 SMA#3 | EUT to Mitest box port 3 | Flexco | SMA Cable port3 | None | 8 Mar 2018 |
| RF#2 SMA#4 | EUT to Mitest box port 4 | Flexco | SMA Cable port4 | None | 8 Mar 2018 |
| RF#2 SMA#SA | Mitest box to SA | Flexco | SMA Cable SA | None | 8 Mar 2018 |
| RF#2 USB#1 | USB Cable to Mitest Box | Dynex | USB Cable | None | Not Required |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


7.1. Radiated Emissions - 3m Chamber

The following tests were performed using the radiated test set-up shown in the diagram below.

Radiated Emissions Below 1GHz Test Setup

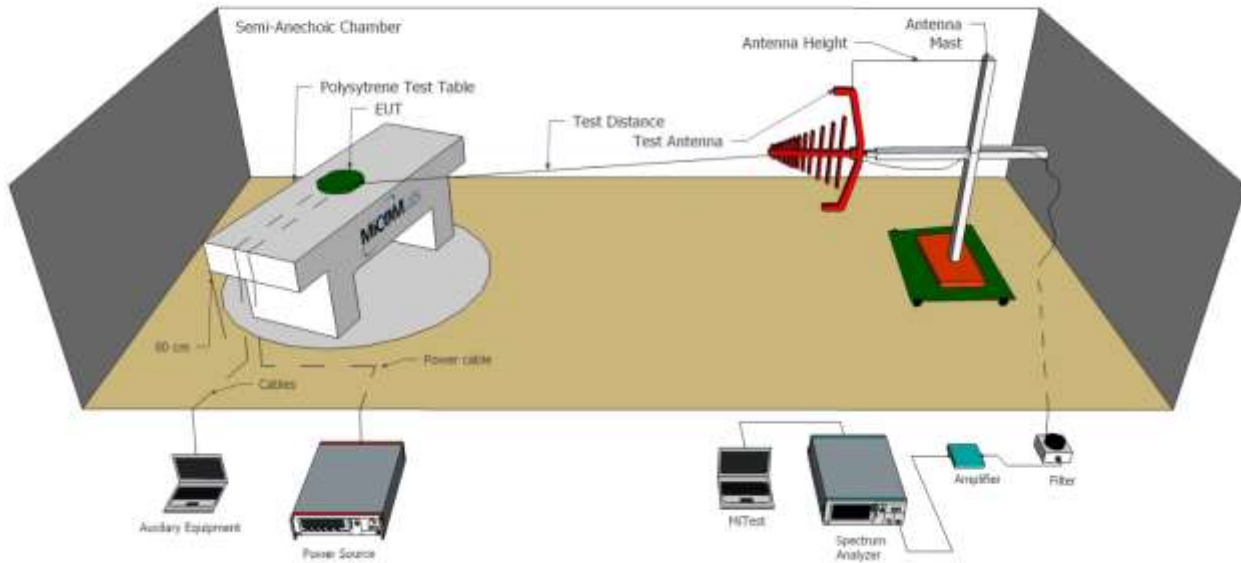

Radiated Emissions Above 1GHz Test Setup

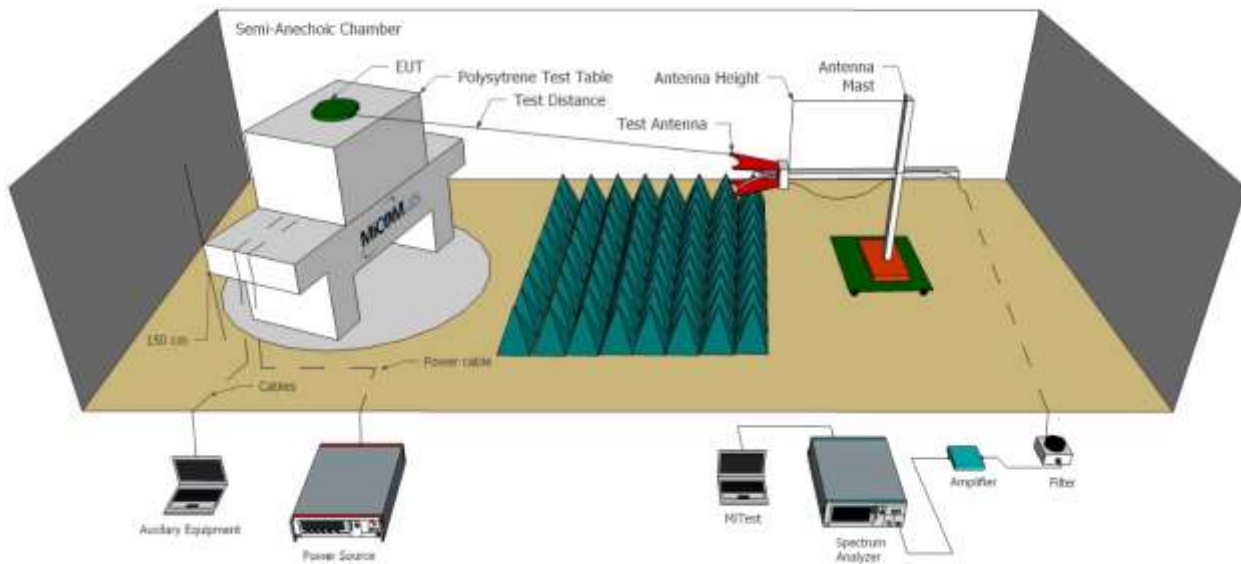

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 21 of 198

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

| Asset# | Description | Manufacturer | Model# | Serial# | Calibration Due Date |
|--------|---|----------------------|---------------------|------------|----------------------|
| 158 | Barometer/Thermometer | Control Company | 4196 | E2846 | 30 Nov 2018 |
| 170 | Video System Controller for Semi Anechoic Chamber | Panasonic | WV-CU101 | 04R08507 | Not Required |
| 287 | Rohde & Schwarz 40 GHz Receiver | Rhode & Schwarz | ESIB40 | 100201 | 2 May 2018 |
| 301 | 5470 to 5725 MHz Notch Filter | Microtronics | RBC50704 | 001 | 6 Oct 2018 |
| 302 | 5150 to 5350 MHz Notch Filter | Microtronics | BRC50703 | 002 | 6 Oct 2018 |
| 303 | 5725 to 5875 MHz Notch filter | Microtronics | BRC50705 | 003 | 6 Oct 2018 |
| 330 | Variac 0-280 Vac | Staco Energy Co | 3PN1020B | 0546 | Cal when used |
| 338 | Sunol 30 to 3000 MHz Antenna | Sunol | JB3 | A052907 | 5 Oct 2018 |
| 341 | 900MHz Notch Filter | EWT | EWT-14-0199 | H1 | 6 Oct 2018 |
| 342 | 2.4 GHz Notch Filter | EWT | EWT-14-0203 | H1 | 6 Oct 2018 |
| 343 | 5.15 GHz Notch Filter | EWT | EWT-14-0200 | H1 | 6 Oct 2018 |
| 344 | 5.35 GHz Notch Filter | EWT | EWT-14-0201 | H1 | 6 Oct 2018 |
| 345 | 5.46 GHz Notch Filter | EWT | EWT-14-0202 | H1 | 6 Oct 2018 |
| 346 | 1.6 TO 10GHz High Pass Filter | EWT | EWT-57-0112 | H1 | 6 Oct 2018 |
| 373 | 26III RMS Multimeter | Fluke | Fluke 26 series III | 76080720 | 21 Sep 2018 |
| 377 | Band Rejection Filter 5150 to 5880MHz | Microtronics | BRM50716 | 034 | 6 Oct 2018 |
| 393 | DC - 1050 MHz Low Pass Filter | Microcircuits | VLFX-1050 | N/A | 6 Oct 2018 |
| 396 | 2.4 GHz Notch Filter | Microtronics | BRM50701 | 001 | 6 Oct 2018 |
| 397 | Amp 10 - 2500MHz | MiCOM Labs | Amp 10 - 2500 MHz | NA | 12 Oct 2018 |
| 399 | ETS 1-18 GHz Horn Antenna | ETS | 3117 | 00154575 | 12 Oct 2018 |
| 406 | Amplifier for Radiated Emissions | MiCOM Labs | 40dB 1 to 18GHz Amp | 0406 | 12 Oct 2018 |
| 410 | Desktop Computer | Dell | Inspiron 620 | WS38 | Not Required |
| 411 | Mast/Turntable Controller | Sunol Sciences | SC98V | 060199-1D | Not Required |
| 412 | USB to GPIB Interface | National Instruments | GPIB-USB HS | 11B8DC2 | Not Required |
| 413 | Mast Controller | Sunol Science | TWR95-4 | 030801-3 | Not Required |
| 414 | DC Power Supply 0-60V | HP | 6274 | 1029A01285 | Cal when used |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 22 of 198

| | | | | | |
|----------|---|-----------------|---|-------------|---------------|
| 415 | Turntable Controller | Sunol Sciences | Turntable Controller | None | Not Required |
| 416 | Gigabit ethernet filter | ETS-Lingren | Gigafoil 260366 | None | Not Required |
| 447 | MiTest Rad Emissions Test Software | MiCOM | Rad Emissions Test Software Version 1.0 | 447 | Not Required |
| 462 | Schwarzbeck cable from Antenna to Amplifier. | Schwarzbeck | AK 9513 | 462 | 4 Oct 2018 |
| 463 | Schwarzbeck cable from Amplifier to Bulkhead. | Schwarzbeck | AK 9513 | 463 | 4 Oct 2018 |
| 464 | Schwarzbeck cable from Bulkhead to Receiver | Schwarzbeck | AK 9513 | 464 | 4 Oct 2018 |
| 465 | Low Pass Filter DC-1000 MHz | Mini-Circuits | NLP-1200+ | VUU01901402 | 6 Oct 2018 |
| 466 | Low Pass Filter DC-1500 MHz | Mini-Circuits | NLP-1750+ | VUU10401438 | 6 Oct 2018 |
| 467 | 2495 to 2650 MHz notch filter | MicroTronics | BRM50709 | 011 | 6 Oct 2018 |
| 468 | Low pass filter | Mini Circuits | SLP-550 | None | 6 Oct 2018 |
| 469 | Low pass filter | Mini Circuit | SLP-1000 | None | 6 Oct 2018 |
| 470 | High Pass filter | Mini Circuits | SHP-700 | None | 6 Oct 2018 |
| 476 | Low Pass dc-2200MHz filter | Mini Circuits | 15542 NLP-2400+ | VUU13801345 | 6 Oct 2018 |
| 480 | Cable - Bulkhead to Amp | SRC Haverhill | 157-3050360 | 480 | 6 Oct 2018 |
| 481 | Cable - Bulkhead to Receiver | SRC Haverhill | 151-3050787 | 481 | 6 Oct 2018 |
| 482 | Cable - Amp to Antenna | SRC Haverhill | 157-3051574 | 482 | 6 Oct 2018 |
| 87 | Uninterruptible Power Supply | Falcon Electric | ED2000-1/2LC | F3471 02/01 | Cal when used |
| CC05 | Confidence Check | MiCOM | CC05 | None | 7 Jan 2018 |
| VLF-1700 | Low pass filter DC-1700 MHz | Mini Circuits | VLF-1700 | None | 6 Oct 2018 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7.2. AC Wireline Emissions

The following tests were performed using the test set-up shown in the diagram below.

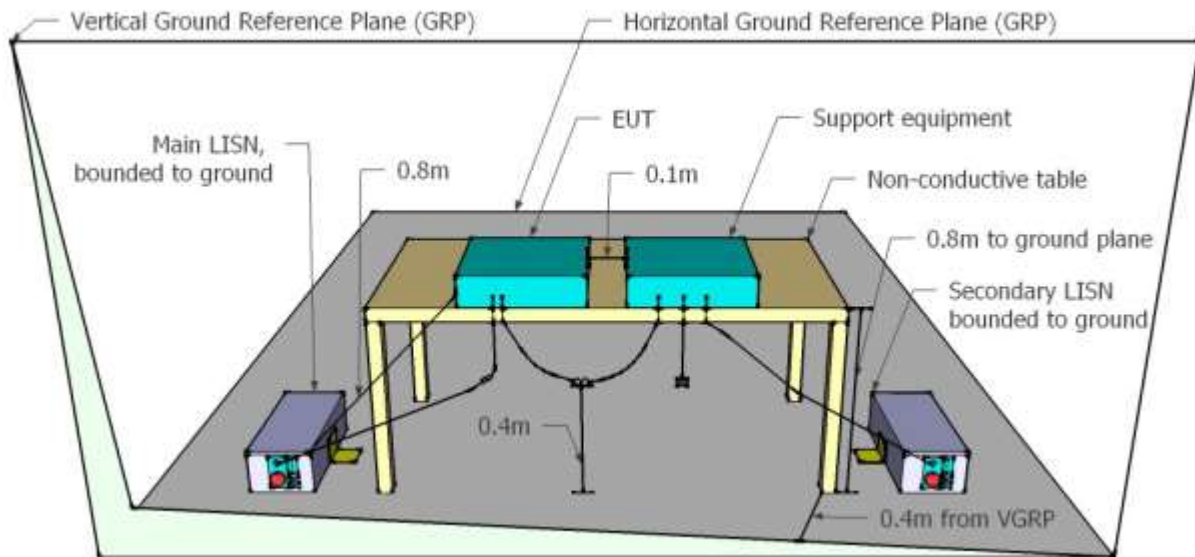

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Test Equipment Utilized

| Asset# | Description | Manufacturer | Model# | Serial# | Calibration Due Date |
|--------|--|------------------------|------------|-------------|----------------------|
| 158 | Barometer/Thermometer | Control Company | 4196 | E2846 | 30 Nov 2018 |
| 184 | Pulse Limiter | Rhode & Schwarz | ESH3Z2 | 357.8810.52 | 6 Oct 2018 |
| 190 | LISN (two-line V-network) | Rhode & Schwarz | ESH3Z5 | 836679/006 | 18 Oct 2018 |
| 287 | Rohde & Schwarz 40 GHz Receiver | Rhode & Schwarz | ESIB40 | 100201 | 2 May 2018 |
| 307 | BNC-CABLE | Megaphase | 1689 1GVT4 | 15F50B002 | 6 Oct 2018 |
| 316 | Dell desktop computer workstation | Dell | Desktop | WS04 | Not Required |
| 372 | AC Variable PS | California Instruments | 1251P | L06951 | Cal when used |
| 378 | Rohde & Schwarz 40 GHz Receiver with Generator | Rhode & Schwarz | ESIB40 | 100107/040 | 12 Oct 2018 |
| 388 | LISN (3 Phase) 9kHz - | Rohde & | ESH2-Z5 | 892107/022 | 20 Oct 2018 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 24 of 198

| | | | | | |
|---------|---|---------|---|------|--------------|
| | 30MHz | Schwarz | | | |
| 496 | MiTest Conducted Emissions test software. | MiCOM | Conducted Emissions Test Software Version 1.0 | 496 | Not Required |
| CCEMC01 | Confidence Check. | MiCOM | CCEMC01 | None | 2 Apr 2018 |


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.

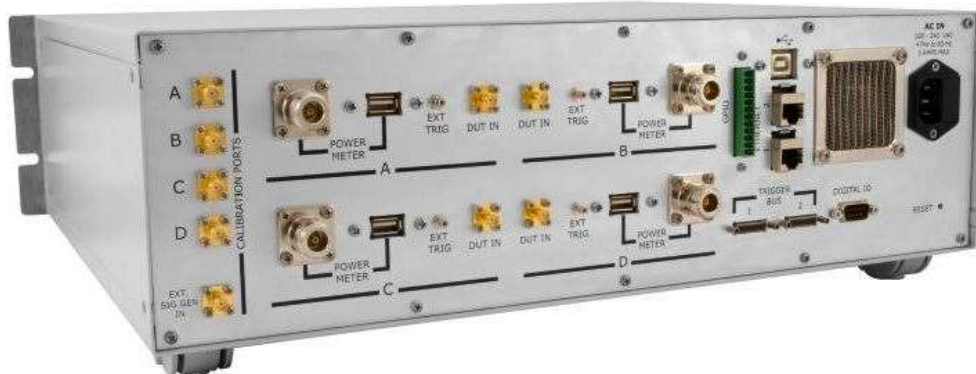

The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9. TEST RESULTS

9.1. Peak Transmit Power

| Conducted Test Conditions for Maximum Conducted Output Power | | | |
|--|--------------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.407 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Maximum Conducted Output Power | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.407 (a) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Maximum Conducted Output Power Measurement

Method PM (Measurement using an RF average power meter). KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate center frequency. All operational modes and frequency bands were measured independently and the resultant calculated. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported separately. A summation (Σ) of each antenna port output power is provided which includes any offset due to Duty Cycle Correction Factor (DCCF). Testing was performed under ambient conditions at nominal voltage.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Supporting Information

Calculated Power = $A + G + Y + 10 \log (1/x)$ dBm

A = Total Power [$10 \cdot \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$]

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

Limits Maximum Conducted Output Power

Operating Frequency Band 5150-5250 MHz

15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 27 of 198

of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5250-5350 and 5470 – 5725 MHz

15. 407 (a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5725 – 5850 MHz

15. 407 (a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 28 of 198

Equipment Configuration for Peak Transmit Power

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11a | Duty Cycle (%): | 99.0 |
| Data Rate: | 6.00 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured Conducted Output Power (dBm) | | | | Calculated Total Power | Minimum 26 dB Bandwidth | Limit | Margin | EUT Power Setting |
|----------------|---------------------------------------|-------|----|----|------------------------|-------------------------|-------|--------|-------------------|
| | Port(s) | | | | | | | | |
| MHz | a | b | c | d | Σ Port(s) dBm | MHz | dBm | dB | |
| 5180.0 | 16.66 | 18.09 | -- | -- | 20.44 | -- | 30.00 | -9.56 | 40.00 |
| 5200.0 | 16.61 | 18.47 | -- | -- | 20.65 | -- | 30.00 | -9.35 | 40.00 |
| 5240.0 | 16.86 | 18.98 | -- | -- | 21.06 | -- | 30.00 | -8.94 | 40.00 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ±1.33 dB |

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Peak Transmit Power

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11ac-80 | Duty Cycle (%): | 99.0 |
| Data Rate: | 29.30 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured Conducted Output Power (dBm) | | | | Calculated Total Power | Minimum 26 dB Bandwidth | Limit | Margin | EUT Power Setting |
|----------------|---------------------------------------|-------|----|----|------------------------|-------------------------|-------|--------|-------------------|
| | Port(s) | | | | | | | | |
| MHz | a | b | c | d | Σ Port(s) dBm | MHz | dBm | dB | |
| 5210.0 | 15.79 | 17.78 | -- | -- | 19.91 | -- | 30.00 | -10.09 | 40.00 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ±1.33 dB |

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 29 of 198

Equipment Configuration for Peak Transmit Power

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11n HT-20 | Duty Cycle (%): | 99.0 |
| Data Rate: | 6.50 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured Conducted Output Power (dBm) | | | | Calculated Total Power | Minimum 26 dB Bandwidth | Limit | Margin | EUT Power Setting |
|----------------|---------------------------------------|-------|----|----|------------------------|-------------------------|-------|--------|-------------------|
| | Port(s) | | | | | | | | |
| MHz | a | b | c | d | Σ Port(s) dBm | MHz | dBm | dB | |
| 5180.0 | 16.60 | 18.04 | -- | -- | 20.39 | -- | 30.00 | -9.61 | 40.00 |
| 5200.0 | 16.51 | 18.33 | -- | -- | 20.52 | -- | 30.00 | -9.48 | 40.00 |
| 5240.0 | 16.94 | 18.93 | -- | -- | 21.06 | -- | 30.00 | -8.94 | 40.00 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ±1.33 dB |

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Peak Transmit Power

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11n HT-40 | Duty Cycle (%): | 99.0 |
| Data Rate: | 13.50 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured Conducted Output Power (dBm) | | | | Calculated Total Power | Minimum 26 dB Bandwidth | Limit | Margin | EUT Power Setting |
|----------------|---------------------------------------|-------|----|----|------------------------|-------------------------|-------|--------|-------------------|
| | Port(s) | | | | | | | | |
| MHz | a | b | c | d | Σ Port(s) dBm | MHz | dBm | dB | |
| 5190.0 | 15.88 | 17.68 | -- | -- | 19.88 | -- | 30.00 | -10.12 | 40.00 |
| 5230.0 | 16.47 | 18.64 | -- | -- | 20.70 | -- | 30.00 | -9.30 | 40.00 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ±1.33 dB |

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 30 of 198

Equipment Configuration for Peak Transmit Power

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11a | Duty Cycle (%): | 99.0 |
| Data Rate: | 6.00 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured Conducted Output Power (dBm) | | | | Calculated Total Power | Minimum 26 dB Bandwidth | Limit | Margin | EUT Power Setting |
|----------------|---------------------------------------|-------|----|----|------------------------|-------------------------|-------|--------|-------------------|
| | Port(s) | | | | | | | | |
| MHz | a | b | c | d | Σ Port(s) dBm | MHz | dBm | dB | |
| 5745.0 | 16.43 | 18.11 | -- | -- | 20.36 | -- | 30.00 | -9.64 | 40.00 |
| 5785.0 | 14.76 | 17.00 | -- | -- | 19.03 | -- | 30.00 | -10.97 | 40.00 |
| 5825.0 | 14.65 | 16.14 | -- | -- | 18.47 | -- | 30.00 | -11.53 | 40.00 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ±1.33 dB |

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Peak Transmit Power

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11ac-80 | Duty Cycle (%): | 99.0 |
| Data Rate: | 29.30 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured Conducted Output Power (dBm) | | | | Calculated Total Power | Minimum 26 dB Bandwidth | Limit | Margin | EUT Power Setting |
|----------------|---------------------------------------|-------|----|----|------------------------|-------------------------|-------|--------|-------------------|
| | Port(s) | | | | | | | | |
| MHz | a | b | c | d | Σ Port(s) dBm | MHz | dBm | dB | |
| 5775.0 | 14.33 | 16.43 | -- | -- | 18.52 | -- | 30.00 | -11.48 | 40.00 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ±1.33 dB |

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 31 of 198

Equipment Configuration for Peak Transmit Power

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11n HT-20 | Duty Cycle (%): | 99.0 |
| Data Rate: | 6.50 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured Conducted Output Power (dBm) | | | | Calculated Total Power | Minimum 26 dB Bandwidth | Limit | Margin | EUT Power Setting |
|----------------|---------------------------------------|-------|----|----|------------------------|-------------------------|-------|--------|-------------------|
| | Port(s) | | | | | | | | |
| MHz | a | b | c | d | Σ Port(s) dBm | MHz | dBm | dB | |
| 5745.0 | 16.38 | 18.05 | -- | -- | 20.31 | -- | 30.00 | -9.69 | 40.00 |
| 5785.0 | 14.63 | 16.97 | -- | -- | 18.97 | -- | 30.00 | -11.03 | 40.00 |
| 5825.0 | 14.54 | 16.11 | -- | -- | 18.41 | -- | 30.00 | -11.59 | 40.00 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ±1.33 dB |

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Peak Transmit Power

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11n HT-40 | Duty Cycle (%): | 99.0 |
| Data Rate: | 13.50 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured Conducted Output Power (dBm) | | | | Calculated Total Power | Minimum 26 dB Bandwidth | Limit | Margin | EUT Power Setting |
|----------------|---------------------------------------|-------|----|----|------------------------|-------------------------|-------|--------|-------------------|
| | Port(s) | | | | | | | | |
| MHz | a | b | c | d | Σ Port(s) dBm | MHz | dBm | dB | |
| 5755.0 | 15.41 | 17.45 | -- | -- | 19.56 | -- | 30.00 | -10.44 | 40.00 |
| 5795.0 | 13.97 | 16.15 | -- | -- | 18.21 | -- | 30.00 | -11.79 | 40.00 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ±1.33 dB |

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 32 of 198

9.2. 26 dB & 99% Bandwidth

| Conducted Test Conditions for 26 dB and 99% Bandwidth | | | |
|---|--------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.407 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | 26 dB and 99 % Bandwidth | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.407 (a) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |
| Test Procedure for 26 dB and 99% Bandwidth Measurement The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported. Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document. | | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 33 of 198

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11a | Duty Cycle (%): | 99.0 |
| Data Rate: | 6.00 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured 26 dB Bandwidth (MHz) | | | | 26 dB Bandwidth (MHz) | | | |
|----------------|--------------------------------|------------------------|----|----|-----------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5180.0 | 23.246 | 28.056 | -- | -- | 28.056 | 23.246 | | |
| 5200.0 | 29.459 | 32.265 | -- | -- | 32.265 | 29.459 | | |
| 5240.0 | 59.319 | 38.277 | -- | -- | 59.319 | 38.277 | | |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | 99% Bandwidth (MHz) | | | |
|----------------|------------------------------|------------------------|----|----|---------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5180.0 | 16.633 | 16.633 | -- | -- | 16.633 | 16.633 | | |
| 5200.0 | 16.834 | 17.034 | -- | -- | 17.034 | 16.834 | | |
| 5240.0 | 42.886 | 21.042 | -- | -- | 42.886 | 21.042 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 34 of 198

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11ac-80 | Duty Cycle (%): | 99.0 |
| Data Rate: | 29.30 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured 26 dB Bandwidth (MHz) | | | | 26 dB Bandwidth (MHz) | | | |
|----------------|--------------------------------|-------------------------|----|----|-----------------------|---------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5210.0 | 119.439 | 107.415 | -- | -- | 119.439 | 107.415 | | |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | 99% Bandwidth (MHz) | | | |
|----------------|------------------------------|------------------------|----|----|---------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5210.0 | 76.954 | 76.954 | -- | -- | 76.954 | 76.954 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 35 of 198

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11n HT-20 | Duty Cycle (%): | 99.0 |
| Data Rate: | 6.50 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured 26 dB Bandwidth (MHz) | | | | 26 dB Bandwidth (MHz) | | | |
|----------------|--------------------------------|------------------------|----|----|-----------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5180.0 | 24.649 | 26.653 | -- | -- | 26.653 | 24.649 | | |
| 5200.0 | 28.257 | 31.663 | -- | -- | 31.663 | 28.257 | | |
| 5240.0 | 60.120 | 38.878 | -- | -- | 60.120 | 38.878 | | |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | 99% Bandwidth (MHz) | | | |
|----------------|------------------------------|------------------------|----|----|---------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5180.0 | 17.836 | 17.836 | -- | -- | 17.836 | 17.836 | | |
| 5200.0 | 18.036 | 18.036 | -- | -- | 18.036 | 18.036 | | |
| 5240.0 | 43.687 | 21.643 | -- | -- | 43.687 | 21.643 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 36 of 198

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11n HT-40 | Duty Cycle (%): | 99.0 |
| Data Rate: | 13.50 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured 26 dB Bandwidth (MHz) | | | | 26 dB Bandwidth (MHz) | | | |
|----------------|--------------------------------|------------------------|----|----|-----------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5190.0 | 48.096 | 65.331 | -- | -- | 65.331 | 48.096 | | |
| 5230.0 | 94.990 | 80.561 | -- | -- | 94.990 | 80.561 | | |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | 99% Bandwidth (MHz) | | | |
|----------------|------------------------------|------------------------|----|----|---------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5190.0 | 36.473 | 36.874 | -- | -- | 36.874 | 36.473 | | |
| 5230.0 | 68.136 | 41.683 | -- | -- | 68.136 | 41.683 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 37 of 198

9.3. 6 dB & 99% Bandwidth

| Conducted Test Conditions for 6 dB and 99% Bandwidth | | | |
|---|--------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.407 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | 6 dB and 99 % Bandwidth | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.407 (a) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |
| Test Procedure for 6 dB and 99% Bandwidth Measurement The bandwidth at 6 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. The Resolution Bandwidth was set to 100 kHz. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported. Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document. | | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 38 of 198

Equipment Configuration for 6 dB & 99% Bandwidth

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11a | Duty Cycle (%): | 99.0 |
| Data Rate: | 6.00 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured 6 dB Bandwidth (MHz) | | | | 6 dB Bandwidth (MHz) | | | |
|----------------|-------------------------------|------------------------|----|----|----------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5745.0 | 16.433 | 16.433 | -- | -- | 16.433 | 16.433 | | |
| 5785.0 | 16.433 | 16.433 | -- | -- | 16.433 | 16.433 | | |
| 5825.0 | 16.433 | 16.433 | -- | -- | 16.433 | 16.433 | | |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | 99% Bandwidth (MHz) | | | |
|----------------|------------------------------|------------------------|----|----|---------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5745.0 | 16.633 | 17.635 | -- | -- | 17.635 | 16.633 | | |
| 5785.0 | 16.433 | 16.633 | -- | -- | 16.633 | 16.433 | | |
| 5825.0 | 16.433 | 16.633 | -- | -- | 16.633 | 16.433 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 39 of 198

Equipment Configuration for 6 dB & 99% Bandwidth

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11ac-80 | Duty Cycle (%): | 99.0 |
| Data Rate: | 29.30 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured 6 dB Bandwidth (MHz) | | | | 6 dB Bandwidth (MHz) | | | |
|----------------|-------------------------------|------------------------|----|----|----------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5775.0 | 75.351 | 75.351 | -- | -- | 75.351 | 75.351 | | |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | 99% Bandwidth (MHz) | | | |
|----------------|------------------------------|------------------------|----|----|---------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5775.0 | 76.152 | 76.152 | -- | -- | 76.152 | 76.152 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 40 of 198

Equipment Configuration for 6 dB & 99% Bandwidth

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11n HT-20 | Duty Cycle (%): | 99.0 |
| Data Rate: | 6.50 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured 6 dB Bandwidth (MHz) | | | | 6 dB Bandwidth (MHz) | | | |
|----------------|-------------------------------|------------------------|----|----|----------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5745.0 | 17.635 | 17.635 | -- | -- | 17.635 | 17.635 | | |
| 5785.0 | 17.635 | 17.635 | -- | -- | 17.635 | 17.635 | | |
| 5825.0 | 17.635 | 17.635 | -- | -- | 17.635 | 17.635 | | |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | 99% Bandwidth (MHz) | | | |
|----------------|------------------------------|------------------------|----|----|---------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5745.0 | 17.836 | 18.437 | -- | -- | 18.437 | 17.836 | | |
| 5785.0 | 17.635 | 17.836 | -- | -- | 17.836 | 17.635 | | |
| 5825.0 | 17.635 | 17.635 | -- | -- | 17.635 | 17.635 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 41 of 198

Equipment Configuration for 6 dB & 99% Bandwidth

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11n HT-40 | Duty Cycle (%): | 99.0 |
| Data Rate: | 13.50 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured 6 dB Bandwidth (MHz) | | | | 6 dB Bandwidth (MHz) | | | |
|----------------|-------------------------------|------------------------|----|----|----------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5755.0 | 35.271 | 35.271 | -- | -- | 35.271 | 35.271 | | |
| 5795.0 | 35.271 | 35.271 | -- | -- | 35.271 | 35.271 | | |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | 99% Bandwidth (MHz) | | | |
|----------------|------------------------------|------------------------|----|----|---------------------|--------|--|--|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | | |
| 5755.0 | 36.473 | 36.473 | -- | -- | 36.473 | 36.473 | | |
| 5795.0 | 36.072 | 36.473 | -- | -- | 36.473 | 36.072 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.4. Power Spectral Density

| Conducted Test Conditions for Power Spectral Density | | | |
|--|--------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.407 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Power Spectral Density | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.407 (a) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Power Spectral Density

The in-band power spectral density was measured using the test technique specified in KDB 789033. A 1 MHz measurement bandwidth was implemented for the analyzer sweep. Once the sweep is complete the analyzer trace data is downloaded and used for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed (\hat{a}) and a link to this additional graphic is provided.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

NOTE: It may be observed that spectrum in some plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

Supporting Information

Calculated Power = $A + 10 \log(1/x)$ dBm

$A = \text{Total Power Spectral Density } [10 \cdot \text{Log}_{10}(10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

$x = \text{Duty Cycle}$

Limits Power Spectral Density

Operating Frequency Band 5150-5250 MHz

15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 43 of 198

frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5250-5350 and 5470 – 5725 MHz

15. 407 (a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5725 – 5850 MHz

15. 407 (a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 44 of 198

| |
|---|
| Equipment Configuration for Power Spectral Density |
|---|

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11a | Duty Cycle (%): | 99.0 |
| Data Rate: | 6.00 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

| |
|---------------------------------|
| Test Measurement Results |
|---------------------------------|

| Test Frequency | Measured Power Spectral Density | | | | Summation Peak Marker + DCCF (+0.04 dB) | Limit | Margin |
|----------------|---------------------------------|-----------------------|----|----|---|---------|--------|
| | Port(s) (dBm/MHz) | | | | | | |
| MHz | a | b | c | d | dBm/MHz | dBm/MHz | dB |
| 5180.0 | 5.467 | 7.736 | -- | -- | 9.098 | 17.0 | -7.9 |
| 5200.0 | 5.071 | 6.661 | -- | -- | 8.819 | 17.0 | -8.2 |
| 5240.0 | 4.896 | 8.103 | -- | -- | 9.615 | 17.0 | -7.4 |

| |
|---|
| Traceability to Industry Recognized Test Methodologies |
|---|

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 45 of 198

Equipment Configuration for Power Spectral Density

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11ac-80 | Duty Cycle (%): | 99.0 |
| Data Rate: | 29.30 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured Power Spectral Density | | | | Summation Peak Marker + DCCF (+0.04 dB) | Limit | Margin |
|----------------|---------------------------------|------------------------|----|----|---|---------|--------|
| | Port(s) (dBm/MHz) | | | | | | |
| MHz | a | b | c | d | dBm/MHz | dBm/MHz | dB |
| 5210.0 | -5.526 | -3.641 | -- | -- | -2.412 | 17.0 | -19.4 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 46 of 198

| |
|---|
| Equipment Configuration for Power Spectral Density |
|---|

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11n HT-20 | Duty Cycle (%): | 99.0 |
| Data Rate: | 6.50 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

| |
|---------------------------------|
| Test Measurement Results |
|---------------------------------|

| Test Frequency | Measured Power Spectral Density | | | | Summation Peak Marker + DCCF (+0.04 dB) | Limit | Margin |
|----------------|---------------------------------|-----------------------|----|----|---|---------|--------|
| | Port(s) (dBm/MHz) | | | | | | |
| MHz | a | b | c | d | dBm/MHz | dBm/MHz | dB |
| 5180.0 | 4.407 | 7.258 | -- | -- | 8.710 | 17.0 | -8.3 |
| 5200.0 | 4.716 | 7.642 | -- | -- | 8.920 | 17.0 | -8.1 |
| 5240.0 | 4.636 | 6.803 | -- | -- | 8.352 | 17.0 | -8.7 |

| |
|---|
| Traceability to Industry Recognized Test Methodologies |
|---|

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 47 of 198

Equipment Configuration for Power Spectral Density

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11n HT-40 | Duty Cycle (%): | 99.0 |
| Data Rate: | 13.50 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured Power Spectral Density | | | | Summation Peak Marker + DCCF (+0.04 dB) | Limit | Margin |
|----------------|---------------------------------|-----------------------|----|----|---|---------|--------|
| | Port(s) (dBm/MHz) | | | | | | |
| MHz | a | b | c | d | dBm/MHz | dBm/MHz | dB |
| 5190.0 | 0.344 | 1.868 | -- | -- | 4.215 | 17.0 | -12.8 |
| 5230.0 | -0.078 | 4.046 | -- | -- | 4.606 | 17.0 | -12.4 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 48 of 198

Equipment Configuration for Power Spectral Density

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11a | Duty Cycle (%): | 99.0 |
| Data Rate: | 6.00 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured Power Spectral Density | | | | Summation Peak Marker + DCCF (+0.04 dB) | Limit | Margin |
|----------------|---------------------------------|-----------------------|----|----|---|-------------|--------|
| | Port(s) (dBm/500 KHz) | | | | | | |
| MHz | a | b | c | d | dBm/500 KHz | dBm/500 KHz | dB |
| 5745.0 | 1.828 | 3.379 | -- | -- | 5.595 | 30.0 | -24.4 |
| 5785.0 | 0.226 | 2.756 | -- | -- | 4.417 | 30.0 | -25.6 |
| 5825.0 | 0.223 | 2.729 | -- | -- | 4.080 | 30.0 | -25.9 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 49 of 198

Equipment Configuration for Power Spectral Density

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11ac-80 | Duty Cycle (%): | 99.0 |
| Data Rate: | 29.30 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured Power Spectral Density | | | | Summation Peak Marker + DCCF (+0.04 dB) | Limit | Margin |
|----------------|---------------------------------|------------------------|----|----|---|-------------|--------|
| | Port(s) (dBm/500 KHz) | | | | | | |
| MHz | a | b | c | d | dBm/500 KHz | dBm/500 KHz | dB |
| 5775.0 | -10.146 | -6.505 | -- | -- | -3.428 | 30.0 | -33.4 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 50 of 198

Equipment Configuration for Power Spectral Density

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11n HT-20 | Duty Cycle (%): | 99.0 |
| Data Rate: | 6.50 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency MHz | Measured Power Spectral Density Port(s) (dBm/500 KHz) | | | | Summation Peak Marker + DCCF (+0.04 dB) dBm/500 KHz | Limit dBm/500 KHz | Margin dB |
|-----------------------|--|-----------------------|----|----|---|----------------------|--------------|
| | a | b | c | d | | | |
| 5745.0 | 0.926 | 3.349 | -- | -- | 4.974 | 30.0 | -25.0 |
| 5785.0 | -2.056 | 2.145 | -- | -- | 3.019 | 30.0 | -27.0 |
| 5825.0 | -0.440 | 1.798 | -- | -- | 3.597 | 30.0 | -26.4 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 51 of 198

Equipment Configuration for Power Spectral Density

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 802.11n HT-40 | Duty Cycle (%): | 99.0 |
| Data Rate: | 13.50 MBit/s | Antenna Gain (dBi): | 2.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | None | | |

Test Measurement Results

| Test Frequency | Measured Power Spectral Density | | | | Summation Peak Marker + DCCF (+0.04 dB) | Limit | Margin |
|----------------|---------------------------------|------------------------|----|----|---|-------------|--------|
| | Port(s) (dBm/500 KHz) | | | | | | |
| MHz | a | b | c | d | dBm/500 KHz | dBm/500 KHz | dB |
| 5755.0 | -3.763 | -1.577 | -- | -- | 0.284 | 30.0 | -29.7 |
| 5795.0 | -3.410 | -2.297 | -- | -- | -0.336 | 30.0 | -30.3 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.5. Radiated

| Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions | | | |
|--|---|----------------------------|-------------|
| Standard: | FCC CFR 47:15.407 | Ambient Temp. (°C): | 20.0 - 24.5 |
| Test Heading: | Radiated Spurious and Band-Edge Emissions | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.407 (b), 15.205, 15.209 | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Limits for Restricted Bands (15.205, 15.209)

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



FS = Field Strength
R = Measured Spectrum analyzer Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss

Example:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dBµV/m);

$$E = 1000000 \times \sqrt[3]{30P} / 3 \text{ } \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dBuV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:
 Level (dBmV/m) = 20 * Log (level (mV/m))

40 dBmV/m = 100 mV/m
 48 dBmV/m = 250 mV/m

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| Frequency Band | | | |
|-------------------|---------------------|---------------|-------------|
| MHz | MHz | MHz | GHz |
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | Above 38.6 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 54 of 198

| | | | |
|--|--|--|--|
| 13.36-13.41 | | | |
| <p>(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.</p> <p>(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.</p> <p>(d) The following devices are exempt from the requirements of this section:</p> <ul style="list-style-type: none">(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.(3) Cable locating equipment operated pursuant to §15.213.(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.(6) Transmitters operating under the provisions of subparts D or F of this part.(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a). <p>(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).</p> | | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 55 of 198

9.5.1. TX Spurious & Restricted Band Emissions

5150 - 5250 MHz

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|----------------|------------------------|-------------|
| Antenna: | MikroTik | Variant: | 802.11a |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5180.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 20 | Tested By: | OC |

Test Measurement Results

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| #1 | 5183.81 | 71.76 | 3.13 | -12.02 | 62.87 | Fundamental | Horizontal | 100 | 0 | -- | -- | |
| #2 | 6906.74 | 65.05 | 3.19 | -8.05 | 60.19 | Max Peak (NRB) | Horizontal | 174 | 337 | 68.2 | -8.0 | Pass |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 56 of 198

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|----------------|------------------------|-------------|
| Antenna: | MikroTik | Variant: | 802.11a |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5200.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 40 | Tested By: | OC |

Test Measurement Results

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| #1 | 5198.48 | 83.05 | 3.10 | -11.98 | 74.17 | Fundamental | Horizontal | 100 | 0 | -- | -- | |
| #2 | 6933.42 | 69.93 | 3.19 | -7.96 | 65.16 | Max Peak (NRB) | Horizontal | 190 | 40 | 68.2 | -3.1 | Pass |
| #3 | 10398.01 | 60.62 | 4.41 | -5.77 | 59.26 | Max Peak (NRB) | Horizontal | 175 | 219 | 68.2 | -9.0 | Pass |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 57 of 198

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|----------------|------------------------|-------------|
| Antenna: | MikroTik | Variant: | 802.11a |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5240.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 40 | Tested By: | OC |

Test Measurement Results

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBμV | Cable Loss dB | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
| #1 | 5237.95 | 85.96 | 3.12 | -12.27 | 76.81 | Fundamental | Horizontal | 100 | 0 | -- | -- | |
| #2 | 6988.99 | 57.86 | 3.26 | -7.69 | 53.43 | Max Peak (NRB) | Horizontal | 98 | 48 | 68.2 | -14.8 | Pass |
| #3 | 10477.83 | 64.97 | 4.49 | -6.28 | 63.18 | Max Peak (NRB) | Horizontal | 178 | 221 | 68.2 | -5.1 | Pass |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 58 of 198

5725 - 5850 MHz

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|----------------|------------------------|-------------|
| Antenna: | MikroTik | Variant: | 802.11a |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5745.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 40 | Tested By: | OC |

Test Measurement Results

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| #1 | 5745.01 | 60.63 | 3.18 | -11.06 | 52.75 | Fundamental | Horizontal | 100 | 97 | -- | -- | |
| #2 | 7660.02 | 56.64 | 3.83 | -7.19 | 53.28 | Max Peak | Horizontal | 180 | 330 | 68.2 | -15.0 | Pass |
| #3 | 7660.02 | 52.22 | 3.83 | -7.19 | 48.86 | Max Avg | Horizontal | 180 | 330 | 54.0 | -5.1 | Pass |
| #4 | 16715.50 | 46.61 | 5.66 | 0.73 | 53.00 | Peak (NRB) | Vertical | 100 | 173 | -- | -- | Pass |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 59 of 198

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|----------------|------------------------|-------------|
| Antenna: | MikroTik | Variant: | 802.11a |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5785.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 40 | Tested By: | OC |

Test Measurement Results

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| #1 | 3856.93 | 57.27 | 2.74 | -11.61 | 48.40 | Max Peak | Horizontal | 98 | 195 | 68.2 | -19.8 | Pass |
| #2 | 3856.93 | 51.92 | 2.74 | -11.61 | 43.05 | Max Avg | Horizontal | 98 | 195 | 54.0 | -11.0 | Pass |
| #3 | 5790.54 | 68.16 | 3.20 | -10.80 | 60.56 | Fundamental | Vertical | 100 | 0 | -- | -- | |
| #4 | 7713.46 | 54.60 | 3.75 | -7.24 | 51.11 | Max Peak | Horizontal | 194 | 317 | 68.2 | -17.1 | Pass |
| #5 | 7713.46 | 48.10 | 3.75 | -7.24 | 44.61 | Max Avg | Horizontal | 194 | 317 | 54.0 | -9.4 | Pass |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 60 of 198

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|----------------|------------------------|-------------|
| Antenna: | MikroTik | Variant: | 802.11a |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5825.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 40 | Tested By: | OC |

Test Measurement Results

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| #1 | 5822.01 | 70.07 | 3.23 | -10.74 | 62.56 | Fundamental | Horizontal | 100 | 0 | -- | -- | |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.5.2. Restricted Edge & Band-Edge Emissions

RESULTS SUMMARY FOR RADIATED BAND-EDGE EMISSIONS

5150 - 5250 MHz

| Mikrotik | | Band-Edge Freq | Limit 68.2dBµV/m | Limit 54.0dBµV/m | Power Setting |
|------------------|---------------------------|----------------|------------------|------------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dBµV/m | dBµV/m | |
| 802.11a | 5180.00 | 5150.00 | 58.73 | 43.80 | 20 |
| 802.11ac-80 | 5210.00 | 5150.00 | 67.18 | 44.88 | 17 |
| 802.11n HT-20 | 5180.00 | 5150.00 | 67.83 | 50.91 | 21 |
| 802.11n HT-40 | 5190.00 | 5150.00 | 68.05 | 52.31 | 22 |

5725 MHz Radiated Lower Band-Edge Emissions

| Mikrotik | | Band-Edge Freq | Level dBµV/m | Level dBµV/m | Power Setting |
|------------------|---------------------------|----------------|--------------|--------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dBµV/m | dBµV/m | |
| 802.11a | 5725.00 | 5725.00 | 89.29 | 64.54 | 40 |
| 802.11ac-80 | 5725.00 | 5725.00 | 65.90 | 64.27 | 25 |
| 802.11n HT-20 | 5725.00 | 5725.00 | 64.85 | 64.64 | 40 |
| 802.11n HT-40 | 5725.00 | 5725.00 | 65.89 | 65.67 | 40 |

5850 MHz Radiated Higher Band-Edge Emissions

| Mikrotik | | Band-Edge Freq | Level dBµV/m | Level dBµV/m | Power Setting |
|------------------|---------------------------|----------------|--------------|--------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dBµV/m | dBµV/m | |
| 802.11a | 5850.00 | 5850.00 | 76.48 | 62.54 | 40 |
| 802.11ac-80 | 5850.00 | 5850.00 | 73.54 | 62.92 | 25 |
| 802.11n HT-20 | 5850.00 | 5850.00 | 65.91 | 64.11 | 40 |
| 802.11n HT-40 | 5850.00 | 5850.00 | 68.02 | 61.90 | 40 |

Click on the links to view the data.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 62 of 198

5150 - 5250 MHz

Equipment Configuration for Restricted Lower Band-Edge Emissions

| | | | |
|---------------------------------|----------------|------------------------|-------------|
| Antenna: | MikroTik | Variant: | 802.11a |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5180.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 20 | Tested By: | OC |

Test Measurement Results

| 4500.00 - 5250.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| #1 | 5125.25 | 21.49 | 3.07 | 34.17 | 58.73 | Max Peak | Horizontal | 148 | 15 | 68.2 | -9.5 | Pass |
| #2 | 5148.50 | 6.53 | 3.06 | 34.21 | 43.80 | Max Avg | Horizontal | 148 | 15 | 54.0 | -10.2 | Pass |
| #3 | 5150.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 63 of 198

Equipment Configuration for Restricted Lower Band-Edge Emissions

| | | | |
|---------------------------------|----------------|------------------------|--------------|
| Antenna: | MikroTik | Variant: | 802.11ac-80 |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5210.00 | Data Rate: | 29.30 MBit/s |
| Power Setting: | 17 | Tested By: | OC |

Test Measurement Results

4500.00 - 5350.00 MHz

| Num | Frequency MHz | Raw dBμV | Cable Loss dB | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 5136.37 | 7.63 | 3.06 | 34.19 | 44.88 | Max Avg | Horizontal | 148 | 15 | 54.0 | -9.1 | Pass |
| #2 | 5138.08 | 29.93 | 3.06 | 34.19 | 67.18 | Max Peak | Horizontal | 148 | 15 | 68.2 | -1.1 | Pass |
| #3 | 5150.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 64 of 198

Equipment Configuration for Restricted Lower Band-Edge Emissions

| | | | |
|---------------------------------|----------------|------------------------|---------------|
| Antenna: | MikroTik | Variant: | 802.11n HT-20 |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5180.00 | Data Rate: | 6.50 MBit/s |
| Power Setting: | 21 | Tested By: | OC |

Test Measurement Results

4500.00 - 5195.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 5150.00 | 13.64 | 3.06 | 34.21 | 50.91 | Max Avg | Horizontal | 148 | 15 | 54.0 | -3.1 | Pass |
| #2 | 5150.00 | 30.56 | 3.06 | 34.21 | 67.83 | Max Peak | Horizontal | 148 | 15 | 68.2 | -0.4 | Pass |
| #3 | 5150.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 65 of 198

Equipment Configuration for Restricted Lower Band-Edge Emissions

| | | | |
|---------------------------------|----------------|------------------------|---------------|
| Antenna: | MikroTik | Variant: | 802.11n HT-40 |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5190.00 | Data Rate: | 13.50 MBit/s |
| Power Setting: | 22 | Tested By: | OC |

Test Measurement Results

4500.00 - 5250.00 MHz

| Num | Frequency MHz | Raw dB μ V | Cable Loss dB | AF dB | Level dB μ V/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dB μ V/m | Margin dB | Pass /Fail |
|-----|---------------|----------------|---------------|-------|--------------------|------------------|------------|--------|---------|--------------------|-----------|------------|
| #1 | 5139.48 | 15.06 | 3.06 | 34.19 | 52.31 | Max Avg | Horizontal | 148 | 15 | 54.0 | -1.7 | Pass |
| #2 | 5148.50 | 30.78 | 3.06 | 34.21 | 68.05 | Max Peak | Horizontal | 148 | 15 | 68.2 | -0.2 | Pass |
| #3 | 5150.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 66 of 198

5725 - 5850 MHz

Lower Band-Edge

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

| | | | |
|---------------------------------|----------------|------------------------|-------------|
| Antenna: | MikroTik | Variant: | 802.11a |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5745.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 40 | Tested By: | OC |

Test Measurement Results

| 5600.00 - 5780.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| #1 | 5635.18 | 26.70 | 3.20 | 34.64 | 64.54 | Max Peak | Horizontal | 167 | 338 | 68.2 | -3.7 | Pass |
| #2 | 5724.64 | 51.40 | 3.17 | 34.72 | 89.29 | Max Peak | Horizontal | 167 | 338 | 122.2 | -32.9 | Pass |
| #3 | 5725.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 67 of 198

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

| | | | |
|---------------------------------|----------------|------------------------|--------------|
| Antenna: | MikroTik | Variant: | 802.11ac-80 |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5775.00 | Data Rate: | 29.30 MBit/s |
| Power Setting: | 25 | Tested By: | OC |

Test Measurement Results

5600.00 - 5780.00 MHz

| Num | Frequency MHz | Raw dB μ V | Cable Loss dB | AF dB | Level dB μ V/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dB μ V/m | Margin dB | Pass /Fail |
|-----|---------------|----------------|---------------|-------|--------------------|------------------|------------|--------|---------|--------------------|-----------|------------|
| #1 | 5638.43 | 26.44 | 3.19 | 34.64 | 64.27 | Max Peak | Horizontal | 164 | 338 | 68.2 | -4.0 | Pass |
| #2 | 5651.87 | 28.05 | 3.22 | 34.63 | 65.90 | Max Peak | Horizontal | 164 | 338 | 69.7 | -3.8 | Pass |
| #3 | 5725.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 68 of 198

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

| | | | |
|---------------------------------|----------------|------------------------|---------------|
| Antenna: | MikroTik | Variant: | 802.11n HT-20 |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5745.00 | Data Rate: | 6.50 MBit/s |
| Power Setting: | 40 | Tested By: | OC |

Test Measurement Results

5600.00 - 5780.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 5607.77 | 26.77 | 3.22 | 34.65 | 64.64 | Max Peak | Horizontal | 164 | 338 | 68.2 | -3.6 | Pass |
| #2 | 5635.18 | 27.01 | 3.20 | 34.64 | 64.85 | Max Peak | Horizontal | 164 | 338 | 68.2 | -3.4 | Pass |
| #3 | 5725.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 69 of 198

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

| | | | |
|---------------------------------|----------------|------------------------|---------------|
| Antenna: | MikroTik | Variant: | 802.11n HT-40 |
| Antenna Gain (dBi): | Not Applicable | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5755.00 | Data Rate: | 13.50 MBit/s |
| Power Setting: | 40 | Tested By: | OC |

Test Measurement Results

5600.00 - 5780.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 5641.67 | 27.85 | 3.18 | 34.64 | 65.67 | Max Peak | Horizontal | 164 | 338 | 68.2 | -2.6 | Pass |
| #2 | 5659.45 | 28.04 | 3.21 | 34.64 | 65.89 | Max Peak | Horizontal | 164 | 338 | 74.9 | -9.0 | Pass |
| #3 | 5725.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 70 of 198

Higher Band-Edge

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

| | | | |
|---------------------------------|----------------|------------------------|-------------|
| Antenna: | MikroTik | Variant: | 802.11a |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5825.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 40 | Tested By: | OC |

Test Measurement Results

| 5770.00 - 6000.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| #2 | 5857.11 | 38.30 | 3.20 | 34.98 | 76.48 | Max Peak | Horizontal | 167 | 338 | 110.2 | -33.7 | Pass |
| #3 | 5930.52 | 24.25 | 3.18 | 35.11 | 62.54 | Max Peak | Horizontal | 167 | 338 | 68.2 | -5.7 | Pass |
| #1 | 5850.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 71 of 198

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

| | | | |
|---------------------------------|----------------|------------------------|--------------|
| Antenna: | MikroTik | Variant: | 802.11ac-80 |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5775.00 | Data Rate: | 29.30 MBit/s |
| Power Setting: | 25 | Tested By: | OC |

Test Measurement Results

5770.00 - 6000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #2 | 5863.83 | 35.34 | 3.20 | 35.00 | 73.54 | Max Peak | Horizontal | 164 | 338 | 108.3 | -34.8 | Pass |
| #3 | 5927.76 | 24.62 | 3.19 | 35.11 | 62.92 | Max Peak | Horizontal | 164 | 338 | 68.2 | -5.3 | Pass |
| #1 | 5850.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 72 of 198

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

| | | | |
|---------------------------------|----------------|------------------------|---------------|
| Antenna: | MikroTik | Variant: | 802.11n HT-20 |
| Antenna Gain (dBi): | Not Applicable | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5825.00 | Data Rate: | 6.50 MBit/s |
| Power Setting: | 40 | Tested By: | OC |

Test Measurement Results

5770.00 - 6000.00 MHz

| Num | Frequency MHz | Raw dB μ V | Cable Loss dB | AF dB | Level dB μ V/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dB μ V/m | Margin dB | Pass /Fail |
|-----|---------------|----------------|---------------|-------|--------------------|------------------|------------|--------|---------|--------------------|-----------|------------|
| #2 | 5905.77 | 27.59 | 3.22 | 35.10 | 65.91 | Max Peak | Horizontal | 164 | 338 | 82.4 | -16.5 | Pass |
| #3 | 5931.90 | 25.81 | 3.19 | 35.11 | 64.11 | Max Peak | Horizontal | 164 | 338 | 68.2 | -4.1 | Pass |
| #1 | 5850.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 73 of 198

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

| | | | |
|---------------------------------|----------------|------------------------|---------------|
| Antenna: | MikroTik | Variant: | 802.11n HT-40 |
| Antenna Gain (dBi): | 2.50 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5795.00 | Data Rate: | 13.50 MBit/s |
| Power Setting: | 40 | Tested By: | OC |

Test Measurement Results

5770.00 - 6000.00 MHz

| Num | Frequency MHz | Raw dB μ V | Cable Loss dB | AF dB | Level dB μ V/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dB μ V/m | Margin dB | Pass /Fail |
|-----|---------------|----------------|---------------|-------|--------------------|------------------|------------|--------|---------|--------------------|-----------|------------|
| #2 | 5878.12 | 29.77 | 3.21 | 35.04 | 68.02 | Max Peak | Horizontal | 164 | 338 | 102.8 | -34.8 | Pass |
| #3 | 5939.28 | 23.57 | 3.21 | 35.12 | 61.90 | Max Peak | Horizontal | 164 | 338 | 68.2 | -6.3 | Pass |
| #1 | 5850.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 74 of 198

9.5.3. Digital Emissions

| Radiated Test Conditions for Radiated Digital Emissions (0.03 – 1 GHz) | | | |
|--|--------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 20.0 - 24.5 |
| Test Heading: | Digital Emissions | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.209 | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Radiated Digital Emissions (0.03 – 1 GHz)

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dBmV; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are done as:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100\text{mV/m}$$

$$48 \text{ dBmV/m} = 250\text{mV/m}$$

Limits for Radiated Digital Emissions (0.03 – 1 GHz)

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength | | Measurement Distance (m) |
|-----------------|-------------------------|------------------------------|--------------------------|
| | µV/m (microvolts/meter) | dBµV/m (dB microvolts/meter) | |
| | | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 75 of 198

| | | | |
|-------------|--------------|------|-----|
| 0.009-0.490 | 2400/F(kHz) | -- | 300 |
| 0.490-1.705 | 24000/F(kHz) | -- | 30 |
| 1.705-30.0 | 30 | 29.5 | 30 |
| 30-88 | 100** | 40 | 3 |
| 88-216 | 150** | 43.5 | 3 |
| 216-960 | 200** | 46.0 | 3 |
| Above 960 | 500 | 54.0 | 3 |

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241. (b) In the emission table above, the tighter limit applies at the band edges. (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. (e) The provisions in §§15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part. (f) In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device. (g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 76 of 198

Equipment Configuration for Digital Emissions

| 30.00 - 1000.00 MHz | | | | | | | | | | | | |
|---------------------|---------------|----------|---------------|--------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | PoI | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 30.66 | 37.63 | 3.41 | -10.38 | 30.66 | MaxQP | Vertical | 100 | 157 | 40.0 | -9.3 | Pass |
| 2 | 36.11 | 43.24 | 3.45 | -15.57 | 31.12 | MaxQP | Vertical | 100 | 356 | 40.0 | -8.9 | Pass |
| 3 | 50.51 | 47.10 | 3.55 | -22.95 | 27.70 | MaxQP | Vertical | 100 | 71 | 40.0 | -12.3 | Pass |
| 4 | 98.09 | 49.54 | 3.82 | -21.18 | 32.18 | MaxQP | Vertical | 100 | 88 | 43.5 | -11.3 | Pass |

Test Notes: Model: RBD52G-5HacD2HnD-TC. AC/DC + PoE configuration. Placed 80cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 77 of 198

Equipment Configuration for Digital Emissions

30.00 - 1000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-------------------|---------------|----------|---------------|--------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| 1 | 30.66 | 34.93 | 3.41 | -10.38 | 27.96 | MaxQP | Vertical | 98 | 117 | 40.0 | -12.0 | Pass |
| 2 | 148.16 | 42.18 | 4.04 | -18.76 | 27.46 | MaxQP | Vertical | 99 | 242 | 43.5 | -16.0 | Pass |

Test Notes: Model: RBD52G-5HacD2HnD-TC. AC/DC configuration. Placed 80cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.5.4. AC Wireline Emissions

| Test Conditions for AC Wireline | | | |
|---------------------------------|--------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 20.0 - 24.5 |
| Test Heading: | Digital Emissions | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.207 | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Scope

This test assesses the ability of the EUT to limit its internal noise from being present on the AC mains power input/output ports.

Test Method

The test method shall be in accordance with §15.207 and the Artificial Mains Networks (AMNs) shall be connected to the AC mains power source.

The measurement frequency range extends from 150 kHz to 30 MHz. When the EUT is a transmitter operating at frequencies below 30 MHz, then the exclusion band for transmitters applies for measurements in the transmit mode of operation.

Test Procedure

The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Limits

The equipment shall meet the class B limits given in §15.207. Alternatively, for equipment intended to be used in telecommunication centres only, the class A limits given in §15.207 may be used.

Class B Emissions

* Decreases with the logarithm of the frequency

| Frequency of Emission (MHz) | Conducted Limit (dB μ V) | |
|-----------------------------|------------------------------|------------|
| | Quasi-peak | Quasi-peak |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

Class A Emissions

| Frequency of Emission (MHz) | Conducted Limit (dB μ V) | |
|-----------------------------|------------------------------|---------|
| | Quasi-peak | Average |
| 0.15-0.5 | 79 | 66 |
| 0.5-30 | 73 | 60 |

Traceability

All conducted emission measurements are traceable to national standards. The uncertainty of measurement at a confidence level of not less than 95 %, with a coverage factor of k=2, in the range 9 kHz – 30 MHz (Average & Quasi-peak) is ± 2.64 dB.

Laboratory Measurement Uncertainty

| | |
|-------------------------|-------------------------|
| Measurement uncertainty | Measurement uncertainty |
|-------------------------|-------------------------|

Method

Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'

Equipment Configuration for AC Wireline Emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 79 of 198

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | Factor dB | Total Correction dBµV | Corrected Value dBµV | Measurement Type | Line | Limit dBµV | Margin dB | Pass /Fail |
|--------------------|---------------|----------|---------------|-----------|-----------------------|----------------------|------------------|---------|------------|-----------|------------|
| 1 | 0.460 | 15.82 | 0.07 | 9.93 | 10.00 | 25.82 | Max Avg | Live | 47.1 | -21.3 | Pass |
| 2 | 0.460 | 26.61 | 0.07 | 9.93 | 10.00 | 36.61 | Max Qp | Live | 57.1 | -20.5 | Pass |
| 3 | 0.464 | 15.38 | 0.07 | 9.93 | 10.00 | 25.38 | Max Avg | Neutral | 47.0 | -21.7 | Pass |
| 4 | 0.464 | 26.88 | 0.07 | 9.93 | 10.00 | 36.88 | Max Qp | Neutral | 57.0 | -20.2 | Pass |
| 5 | 23.129 | 28.97 | 0.64 | 10.85 | 11.49 | 40.46 | Max Avg | Neutral | 50.0 | -9.5 | Pass |
| 6 | 23.129 | 32.15 | 0.64 | 10.85 | 11.49 | 43.64 | Max Qp | Neutral | 60.0 | -16.4 | Pass |
| 7 | 26.610 | 28.29 | 0.73 | 10.88 | 11.61 | 39.90 | Max Avg | Live | 50.0 | -10.1 | Pass |
| 8 | 26.610 | 31.82 | 0.73 | 10.88 | 11.61 | 43.43 | Max Qp | Live | 60.0 | -16.6 | Pass |
| 9 | 26.488 | 25.86 | 0.72 | 10.88 | 11.60 | 37.46 | Max Avg | Neutral | 50.0 | -12.5 | Pass |
| 10 | 26.488 | 29.85 | 0.72 | 10.88 | 11.60 | 41.45 | Max Qp | Neutral | 60.0 | -18.6 | Pass |
| 11 | 0.151 | 16.43 | 0.05 | 9.92 | 9.97 | 26.40 | Max Avg | Neutral | 56.0 | -29.6 | Pass |
| 12 | 0.151 | 31.64 | 0.05 | 9.92 | 9.97 | 41.61 | Max Qp | Neutral | 66.0 | -24.4 | Pass |

Test Notes: Model hAP ac2. AC/DC + PoE configuration. 120V 60Hz. AC Mains.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 80 of 198

Equipment Configuration for AC Wireline Emissions

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | Factor dB | Total Correction dBµV | Corrected Value dBµV | Measurement Type | Line | Limit dBµV | Margin dB | Pass /Fail |
|--------------------|---------------|----------|---------------|-----------|-----------------------|----------------------|------------------|---------|------------|-----------|------------|
| 1 | 0.990 | 14.22 | 0.07 | 9.93 | 10.00 | 24.22 | Max Avg | Neutral | 46.0 | -21.8 | Pass |
| 2 | 0.990 | 21.72 | 0.07 | 9.93 | 10.00 | 31.72 | Max Qp | Neutral | 56.0 | -24.3 | Pass |
| 3 | 1.024 | 8.67 | 0.07 | 9.94 | 10.01 | 18.68 | Max Avg | Live | 46.0 | -27.3 | Pass |
| 4 | 1.024 | 18.99 | 0.07 | 9.94 | 10.01 | 29.00 | Max Qp | Live | 56.0 | -27.0 | Pass |
| 5 | 0.858 | 17.03 | 0.10 | 9.94 | 10.04 | 27.07 | Max Avg | Neutral | 46.0 | -18.9 | Pass |
| 6 | 0.858 | 24.85 | 0.10 | 9.94 | 10.04 | 34.89 | Max Qp | Neutral | 56.0 | -21.1 | Pass |
| 7 | 0.526 | 16.05 | 0.09 | 9.92 | 10.01 | 26.06 | Max Avg | Live | 46.0 | -19.9 | Pass |
| 8 | 0.526 | 23.47 | 0.09 | 9.92 | 10.01 | 33.48 | Max Qp | Live | 56.0 | -22.5 | Pass |
| 9 | 0.844 | 16.51 | 0.10 | 9.94 | 10.04 | 26.55 | Max Avg | Live | 46.0 | -19.5 | Pass |
| 10 | 0.844 | 24.89 | 0.10 | 9.94 | 10.04 | 34.93 | Max Qp | Live | 56.0 | -21.1 | Pass |
| 11 | 0.191 | 11.20 | 0.06 | 9.92 | 9.98 | 21.18 | Max Avg | Live | 54.8 | -33.7 | Pass |
| 12 | 0.191 | 27.08 | 0.06 | 9.92 | 9.98 | 37.06 | Max Qp | Live | 64.8 | -27.8 | Pass |

Test Notes: Model hAP ac2. AC/DC configuration. 120V 60Hz. AC Mains.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 81 of 198

A. APPENDIX - GRAPHICAL IMAGES

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



A.1. 26 dB & 99% Bandwidth

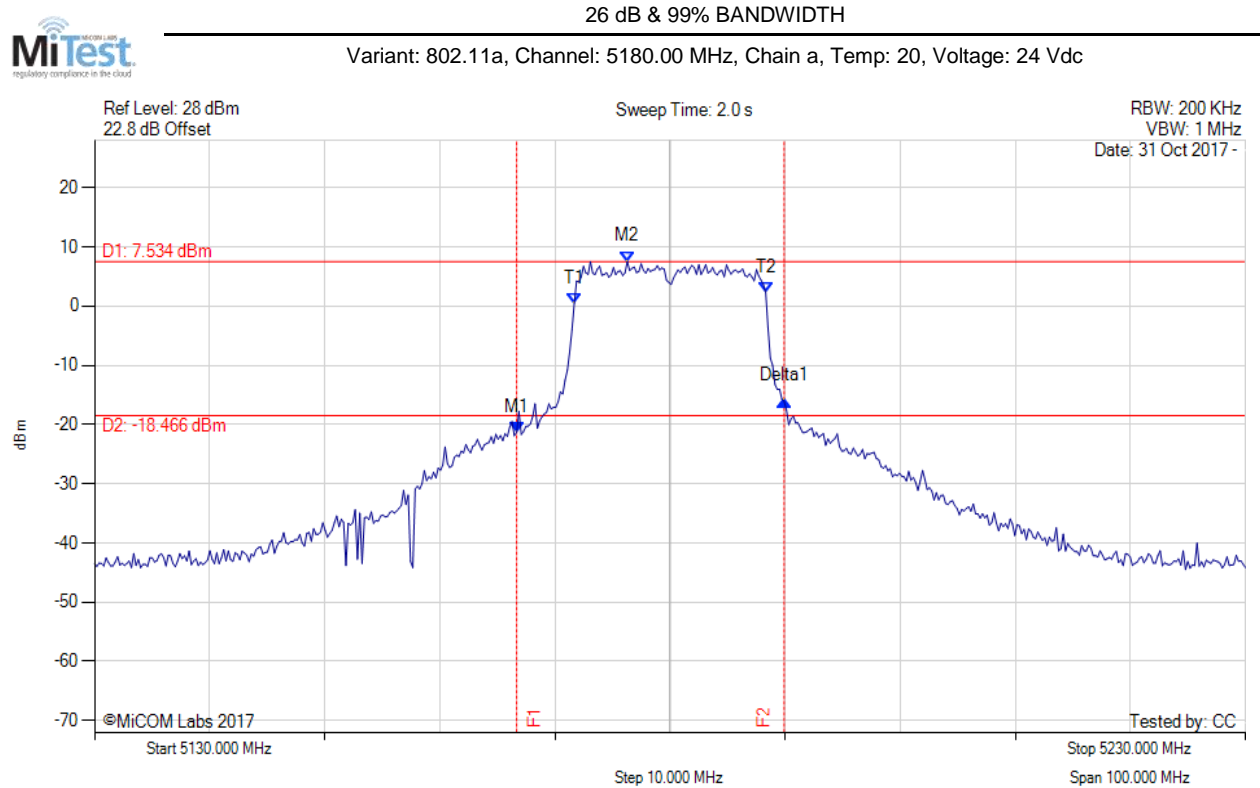

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5166.673 MHz : -21.324 dBm M2 : 5176.293 MHz : 7.534 dBm Delta1 : 23.246 MHz : 5.276 dB T1 : 5171.683 MHz : 0.457 dBm T2 : 5188.317 MHz : 2.302 dBm OBW : 16.633 MHz | Measured 26 dB Bandwidth: 23.246 MHz Measured 99% Bandwidth: 16.633 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5180.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

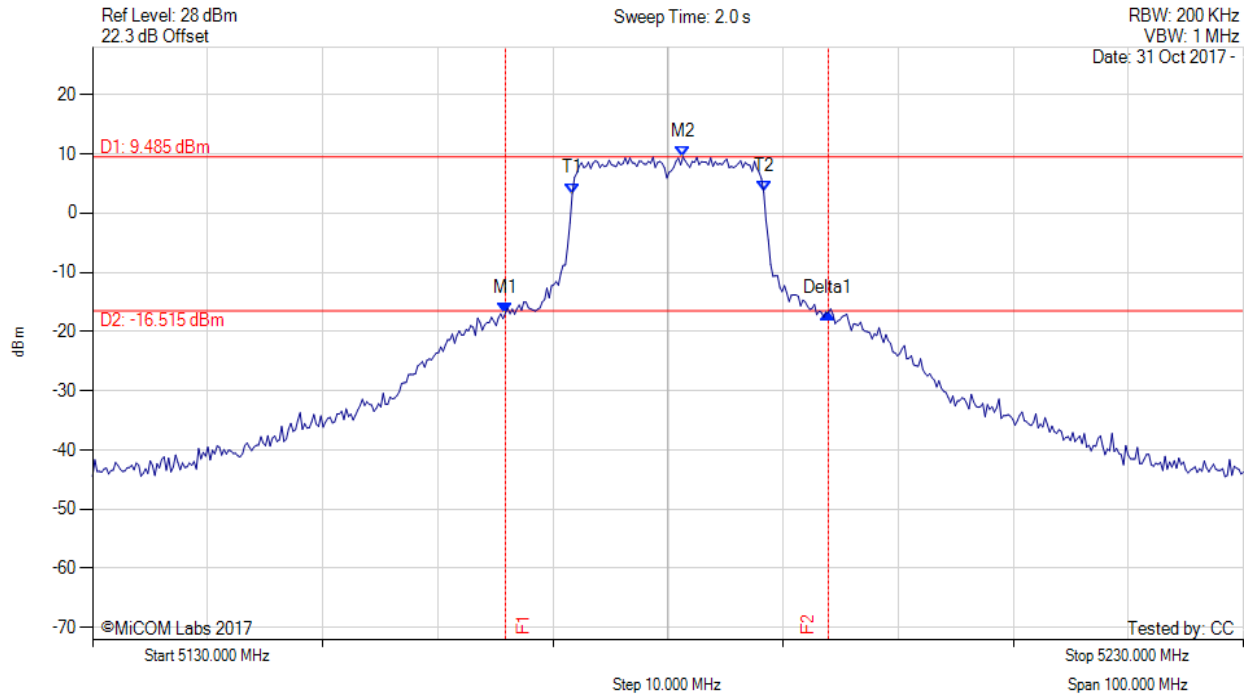

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5165.872 MHz : -16.883 dBm M2 : 5181.303 MHz : 9.485 dBm Delta1 : 28.056 MHz : 0.057 dB T1 : 5171.683 MHz : 3.304 dBm T2 : 5188.317 MHz : 3.571 dBm OBW : 16.633 MHz | Measured 26 dB Bandwidth: 28.056 MHz Measured 99% Bandwidth: 16.633 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variat: 802.11a, Channel: 5200.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

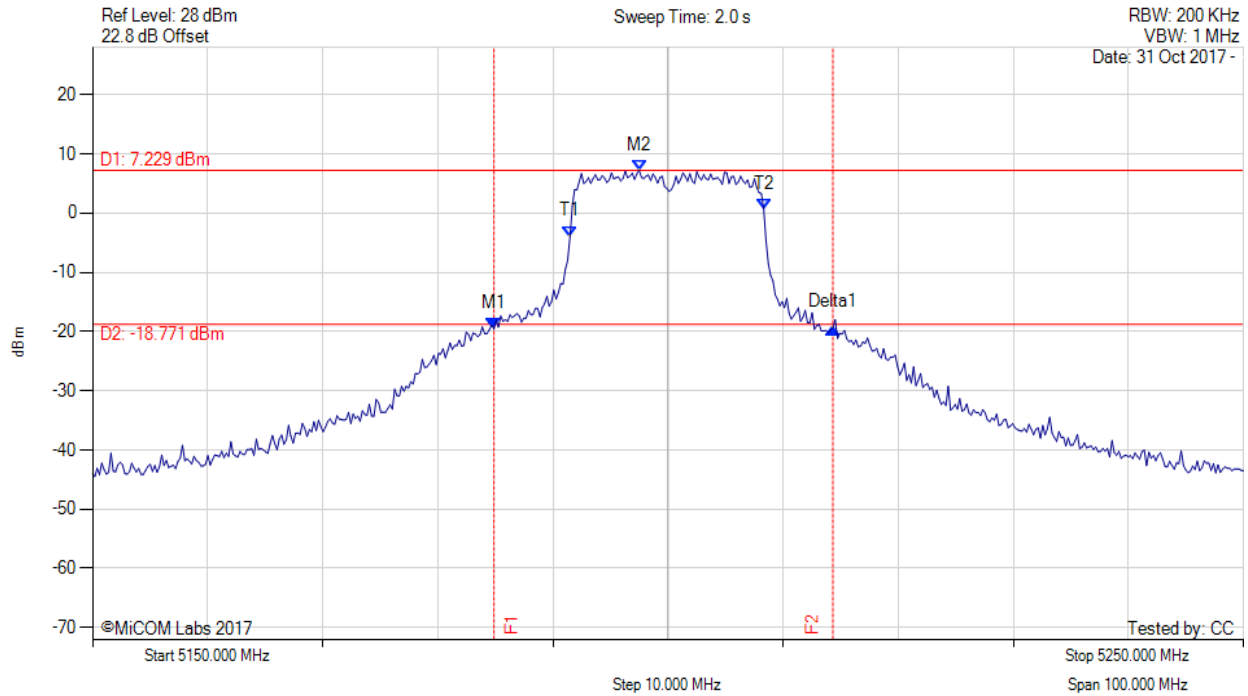

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5184.870 MHz : -19.561 dBm M2 : 5197.495 MHz : 7.229 dBm Delta1 : 29.459 MHz : 0.216 dB T1 : 5191.483 MHz : -3.940 dBm T2 : 5208.317 MHz : 0.636 dBm OBW : 16.834 MHz | Measured 26 dB Bandwidth: 29.459 MHz Measured 99% Bandwidth: 16.834 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variants: 802.11a, Channel: 5200.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

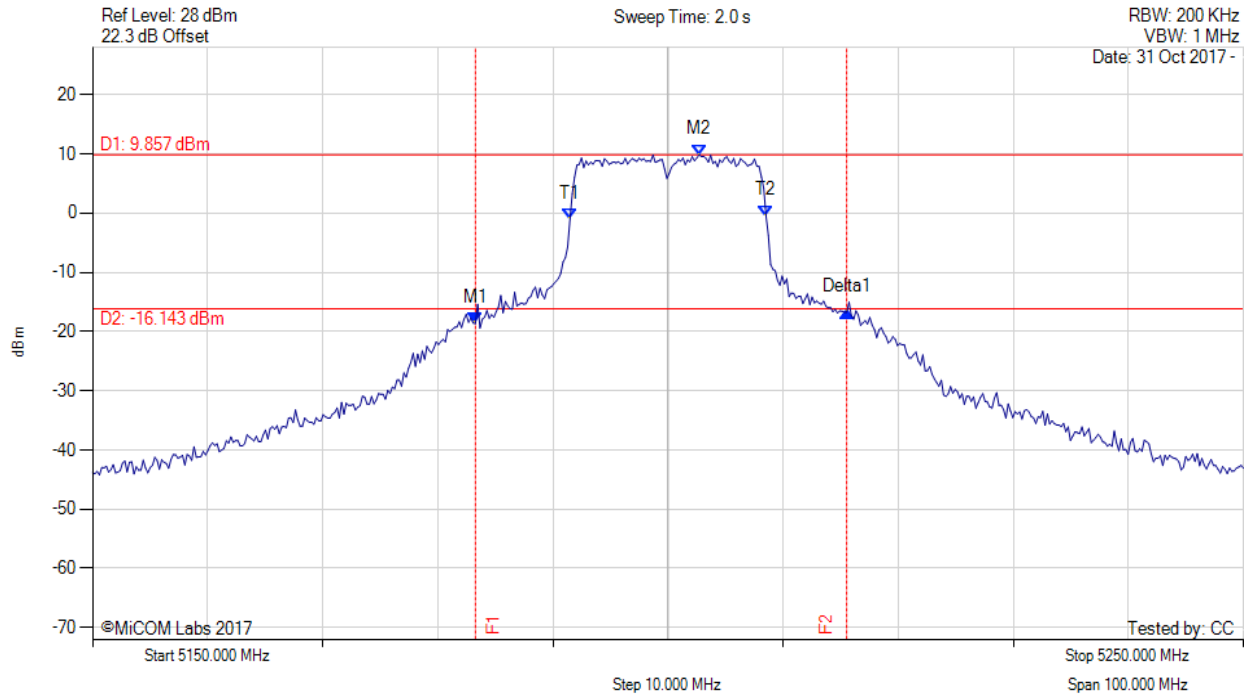

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5183.267 MHz : -18.630 dBm M2 : 5202.705 MHz : 9.857 dBm Delta1 : 32.265 MHz : 1.916 dB T1 : 5191.483 MHz : -0.965 dBm T2 : 5208.517 MHz : -0.411 dBm OBW : 17.034 MHz | Measured 26 dB Bandwidth: 32.265 MHz Measured 99% Bandwidth: 17.034 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 86 of 198



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5240.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

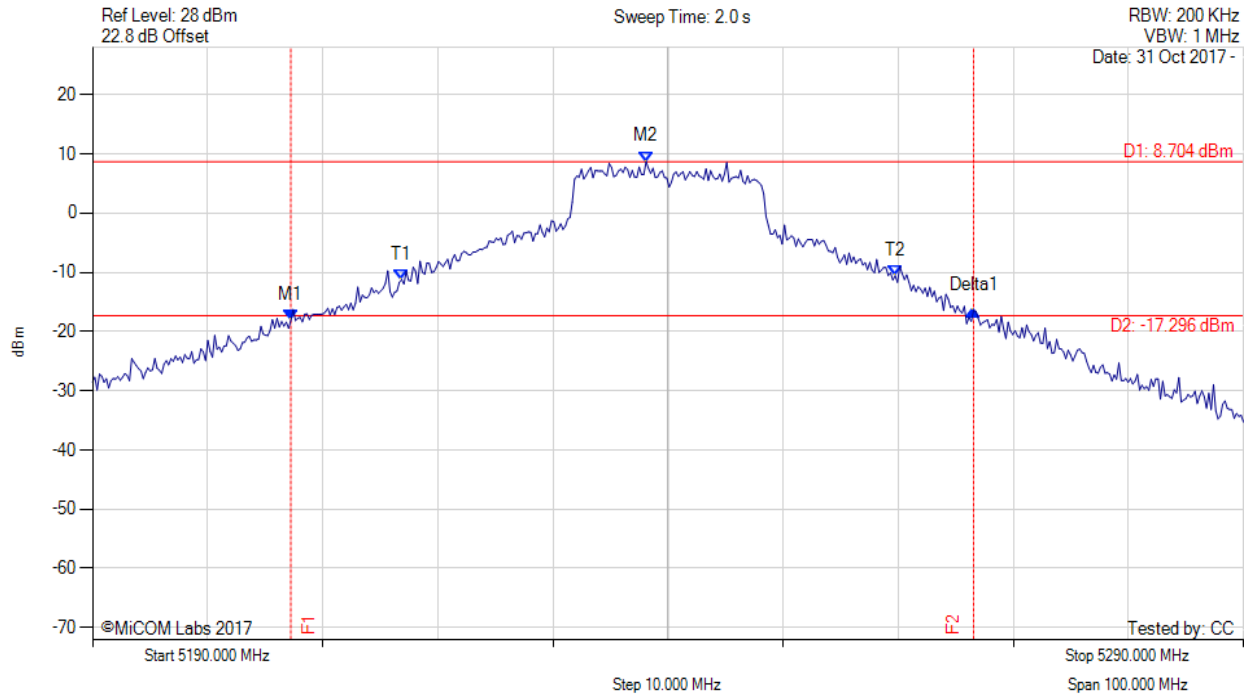

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5207.234 MHz : -18.142 dBm M2 : 5238.096 MHz : 8.704 dBm Delta1 : 59.319 MHz : 1.680 dB T1 : 5216.854 MHz : -11.231 dBm T2 : 5259.739 MHz : -10.588 dBm OBW : 42.886 MHz | Measured 26 dB Bandwidth: 59.319 MHz Measured 99% Bandwidth: 42.886 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variat: 802.11a, Channel: 5240.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

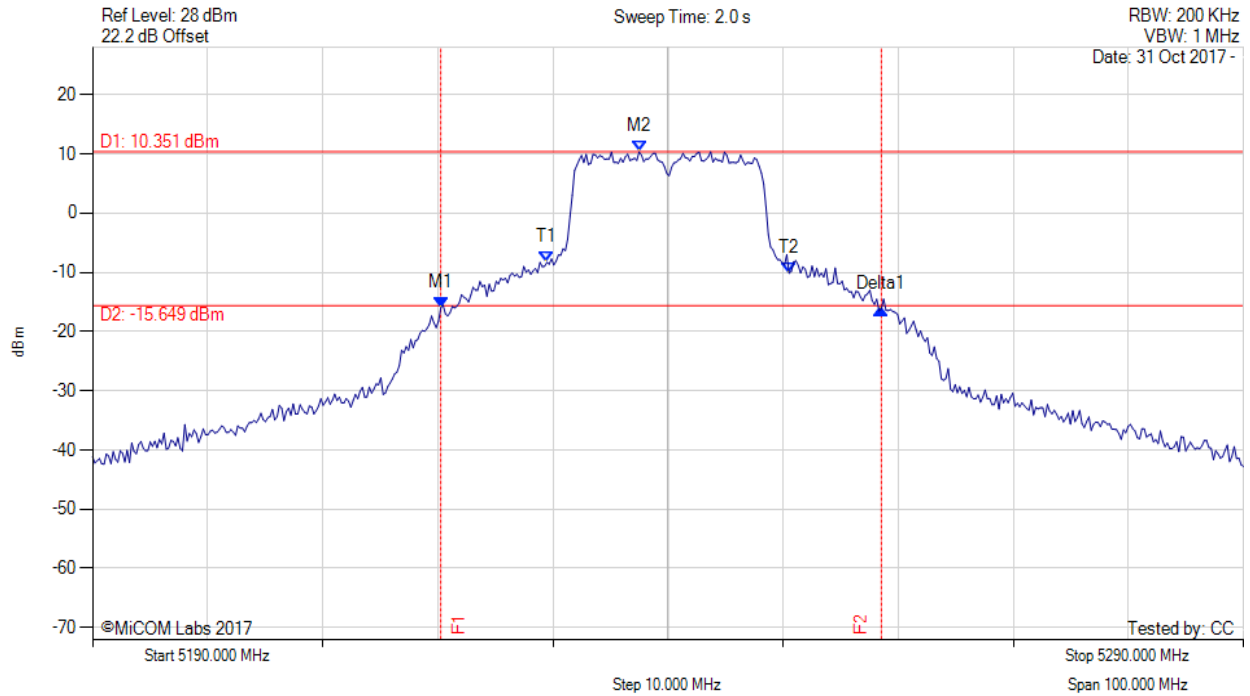

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5220.261 MHz : -15.994 dBm M2 : 5237.495 MHz : 10.351 dBm Delta1 : 38.277 MHz : -0.234 dB T1 : 5229.479 MHz : -8.319 dBm T2 : 5250.521 MHz : -10.161 dBm OBW : 21.042 MHz | Measured 26 dB Bandwidth: 38.277 MHz Measured 99% Bandwidth: 21.042 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

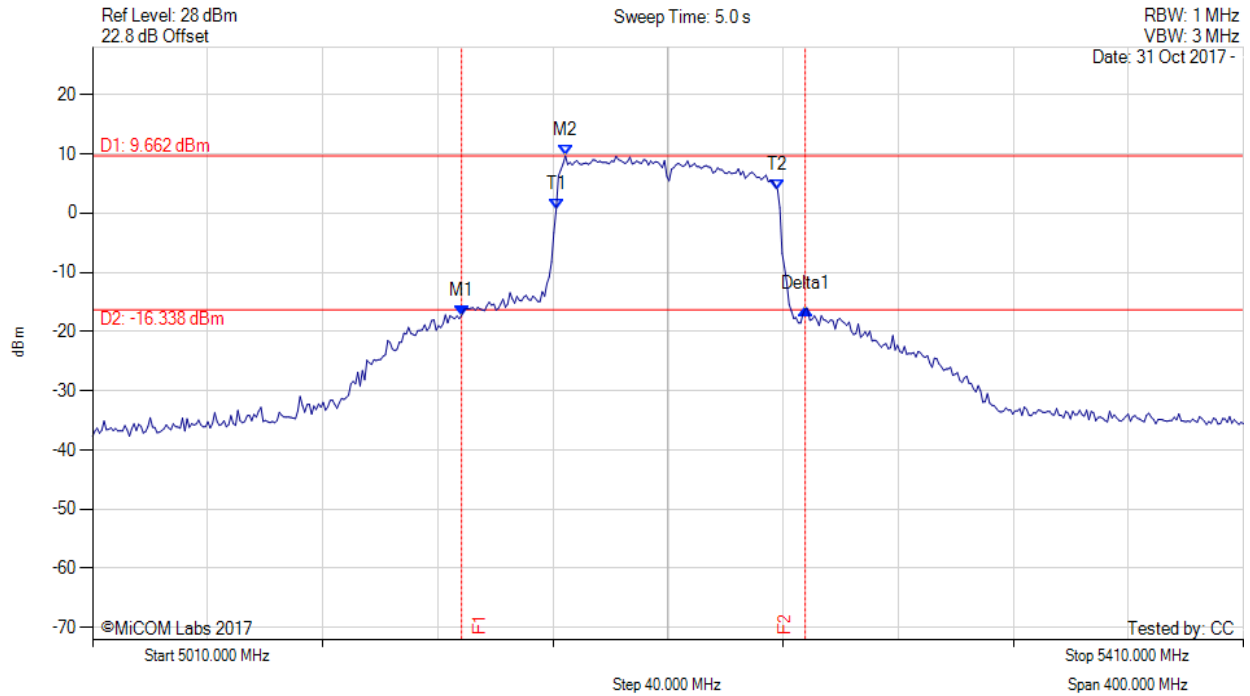

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5138.257 MHz : -17.287 dBm M2 : 5174.329 MHz : 9.662 dBm Delta1 : 119.439 MHz : 1.084 dB T1 : 5171.122 MHz : 0.540 dBm T2 : 5248.076 MHz : 3.933 dBm OBW : 76.954 MHz | Measured 26 dB Bandwidth: 119.439 MHz Measured 99% Bandwidth: 76.954 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

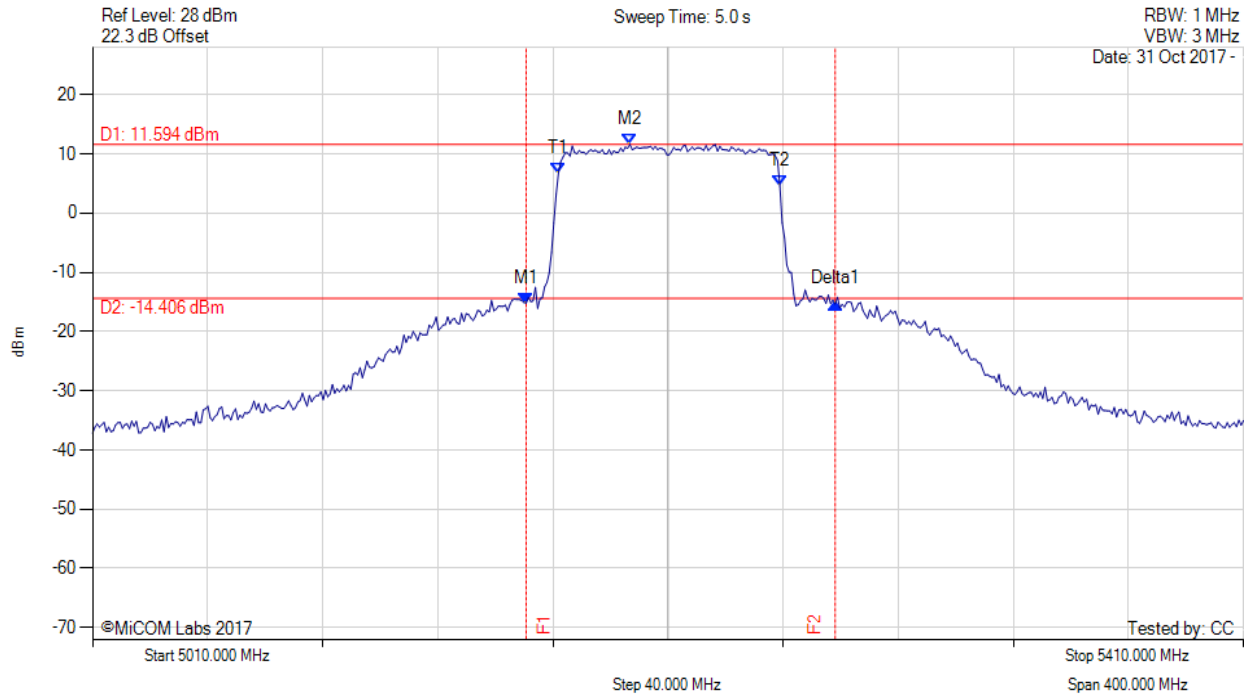

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5160.701 MHz : -15.203 dBm M2 : 5196.774 MHz : 11.594 dBm Delta1 : 107.415 MHz : -0.126 dB T1 : 5171.924 MHz : 6.719 dBm T2 : 5248.878 MHz : 4.555 dBm OBW : 76.954 MHz | Measured 26 dB Bandwidth: 107.415 MHz Measured 99% Bandwidth: 76.954 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

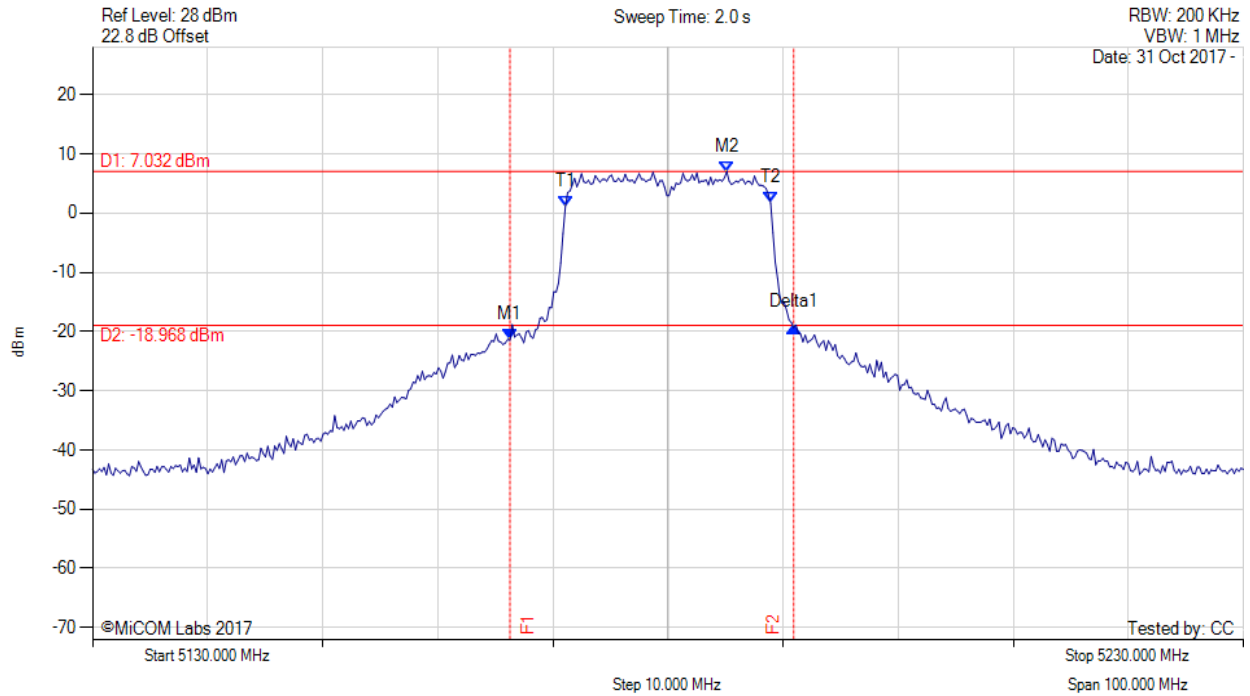

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5166.273 MHz : -21.434 dBm M2 : 5185.110 MHz : 7.032 dBm Delta1 : 24.649 MHz : 2.101 dB T1 : 5171.082 MHz : 1.150 dBm T2 : 5188.918 MHz : 1.712 dBm OBW : 17.836 MHz | Measured 26 dB Bandwidth: 24.649 MHz Measured 99% Bandwidth: 17.836 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variante: 802.11n HT-20, Channel: 5180.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

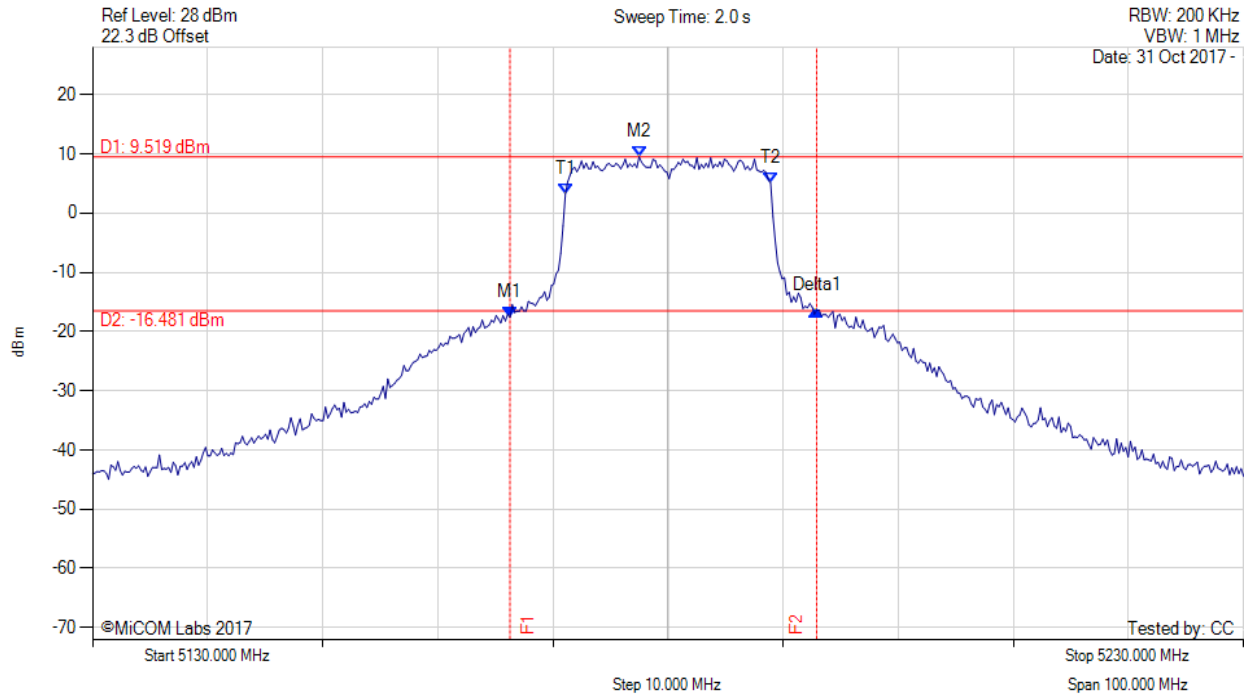

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5166.273 MHz : -17.603 dBm M2 : 5177.495 MHz : 9.519 dBm Delta1 : 26.653 MHz : 1.192 dB T1 : 5171.082 MHz : 3.235 dBm T2 : 5188.918 MHz : 5.082 dBm OBW : 17.836 MHz | Measured 26 dB Bandwidth: 26.653 MHz Measured 99% Bandwidth: 17.836 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

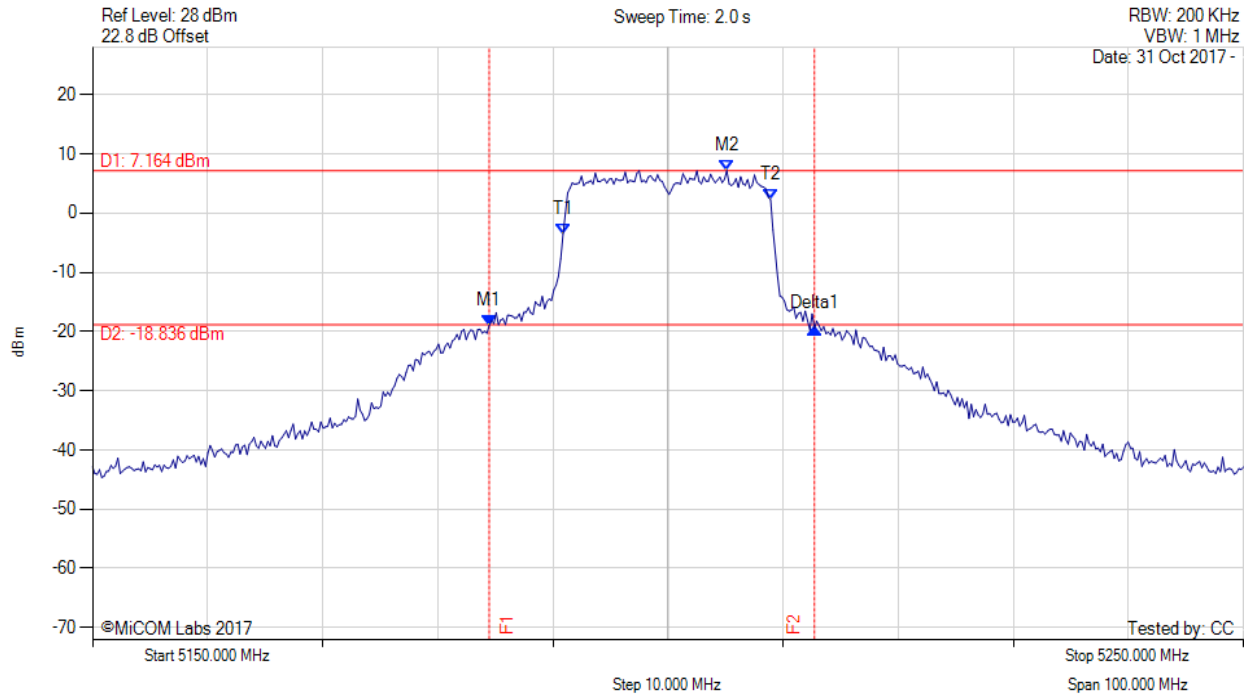

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5184.469 MHz : -18.919 dBm M2 : 5205.110 MHz : 7.164 dBm Delta1 : 28.257 MHz : -0.502 dB T1 : 5190.882 MHz : -3.588 dBm T2 : 5208.918 MHz : 2.234 dBm OBW : 18.036 MHz | Measured 26 dB Bandwidth: 28.257 MHz Measured 99% Bandwidth: 18.036 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

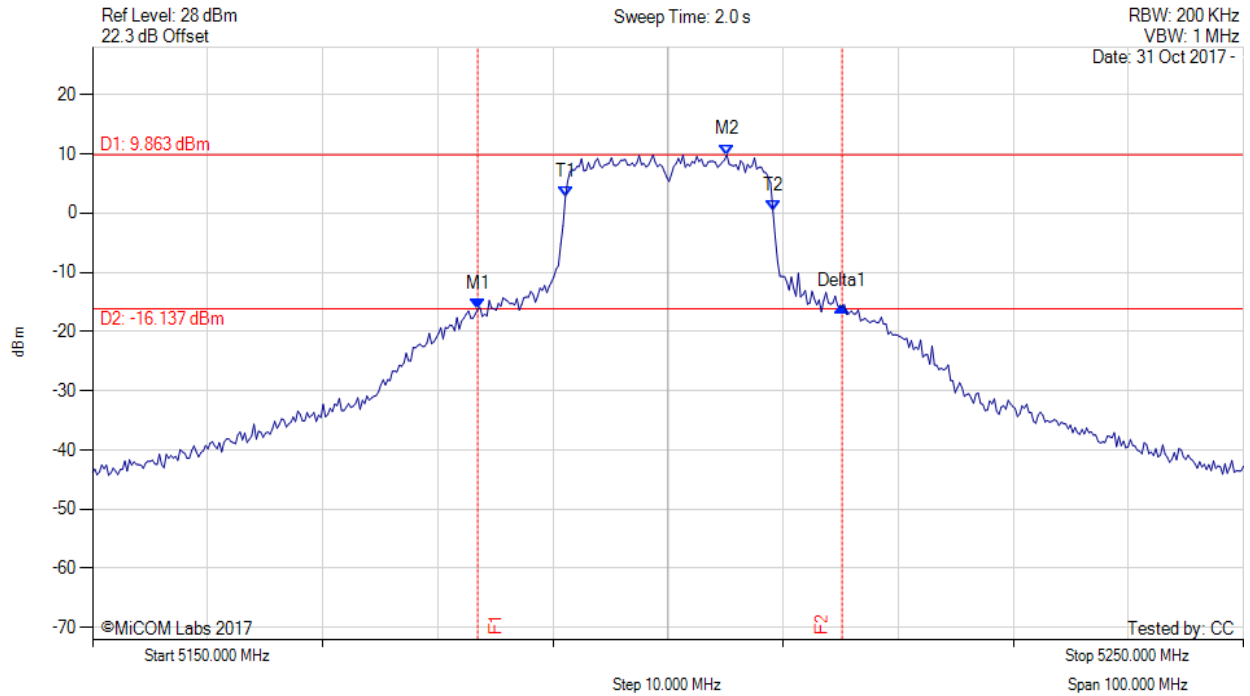

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5183.467 MHz : -16.256 dBm M2 : 5205.110 MHz : 9.863 dBm Delta1 : 31.663 MHz : 0.445 dB T1 : 5191.082 MHz : 2.731 dBm T2 : 5209.118 MHz : 0.335 dBm OBW : 18.036 MHz | Measured 26 dB Bandwidth: 31.663 MHz Measured 99% Bandwidth: 18.036 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variante: 802.11n HT-20, Channel: 5240.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

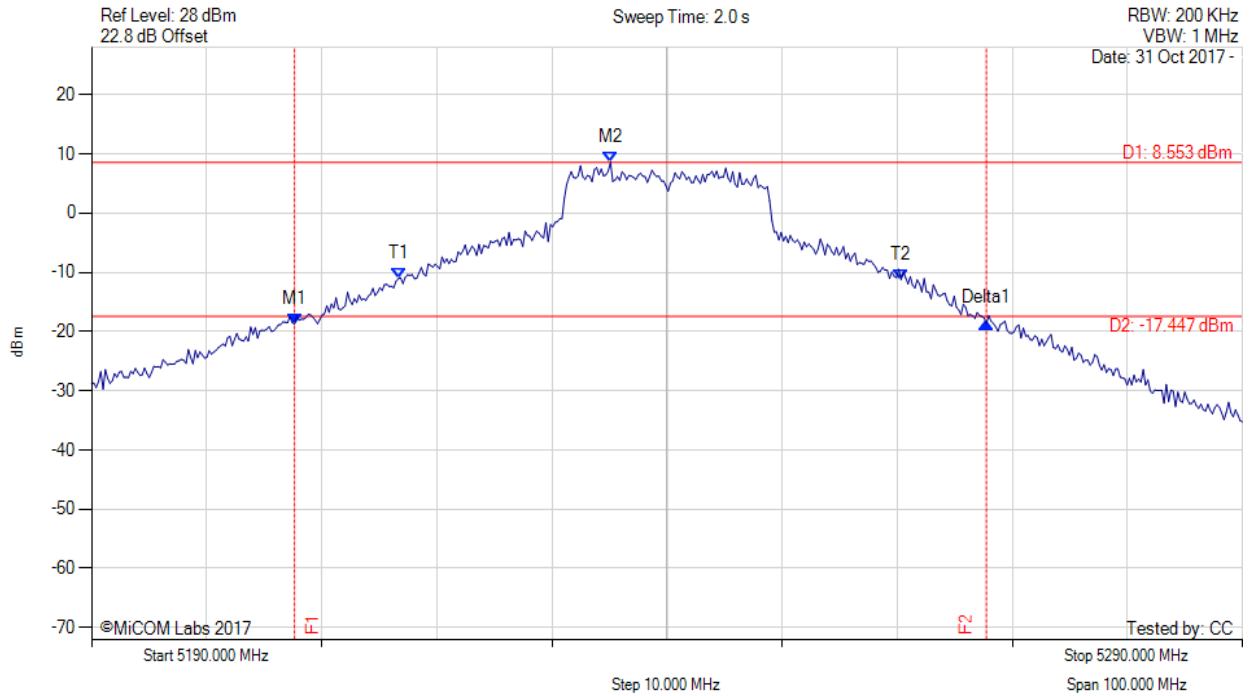

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5207.635 MHz : -18.719 dBm M2 : 5235.090 MHz : 8.553 dBm Delta1 : 60.120 MHz : 0.104 dB T1 : 5216.653 MHz : -11.074 dBm T2 : 5260.341 MHz : -11.243 dBm OBW : 43.687 MHz | Measured 26 dB Bandwidth: 60.120 MHz Measured 99% Bandwidth: 43.687 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variante: 802.11n HT-20, Channel: 5240.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

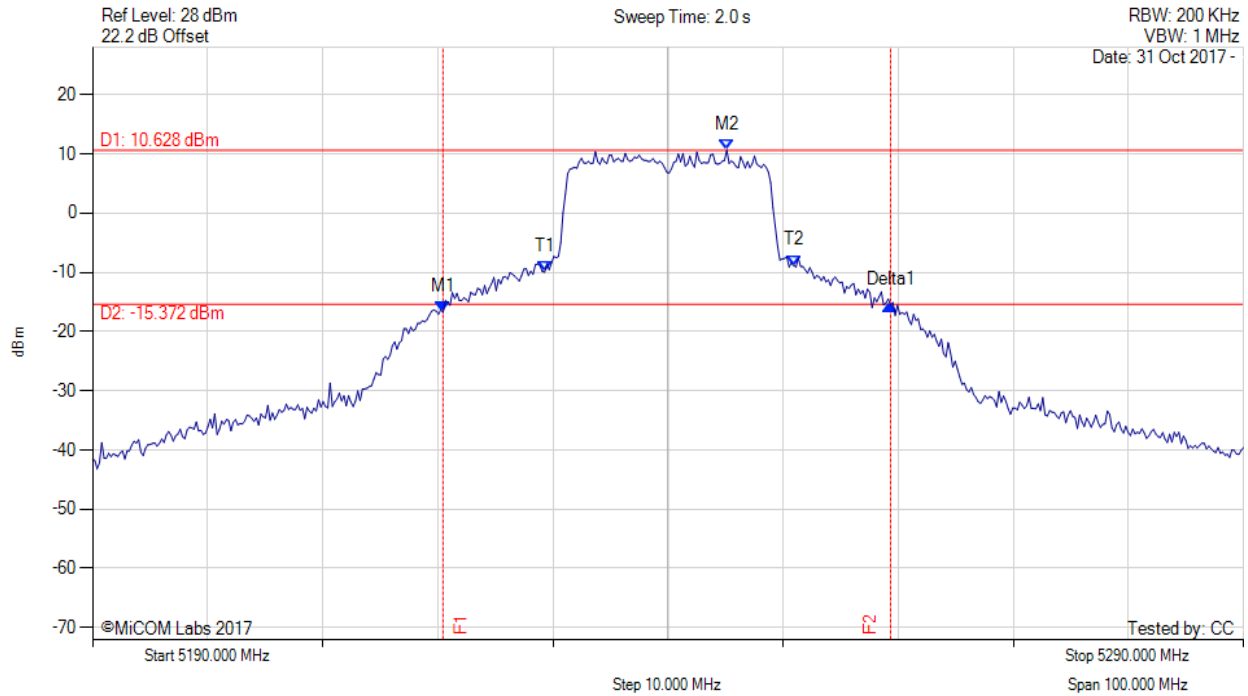

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5220.461 MHz : -16.759 dBm M2 : 5245.110 MHz : 10.628 dBm Delta1 : 38.878 MHz : 1.194 dB T1 : 5229.279 MHz : -9.956 dBm T2 : 5250.922 MHz : -8.843 dBm OBW : 21.643 MHz | Measured 26 dB Bandwidth: 38.878 MHz Measured 99% Bandwidth: 21.643 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

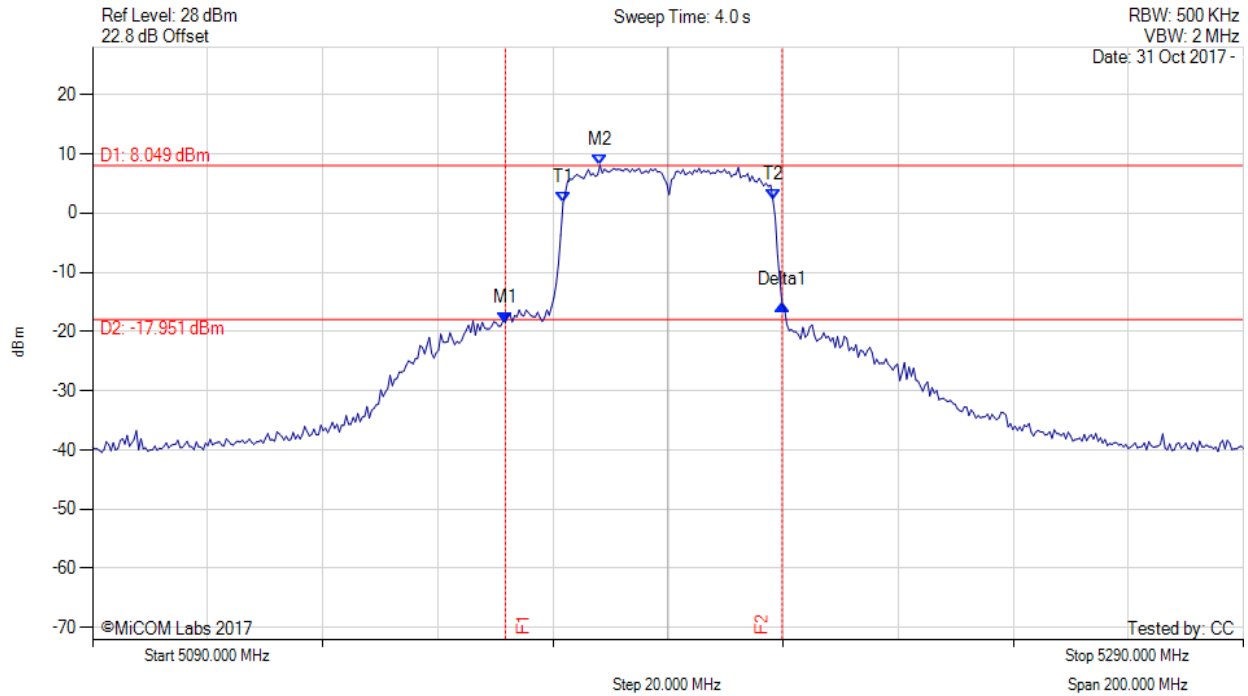

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5161.743 MHz : -18.500 dBm M2 : 5178.176 MHz : 8.049 dBm Delta1 : 48.096 MHz : 3.042 dB T1 : 5171.764 MHz : 1.710 dBm T2 : 5208.236 MHz : 2.220 dBm OBW : 36.473 MHz | Measured 26 dB Bandwidth: 48.096 MHz Measured 99% Bandwidth: 36.473 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

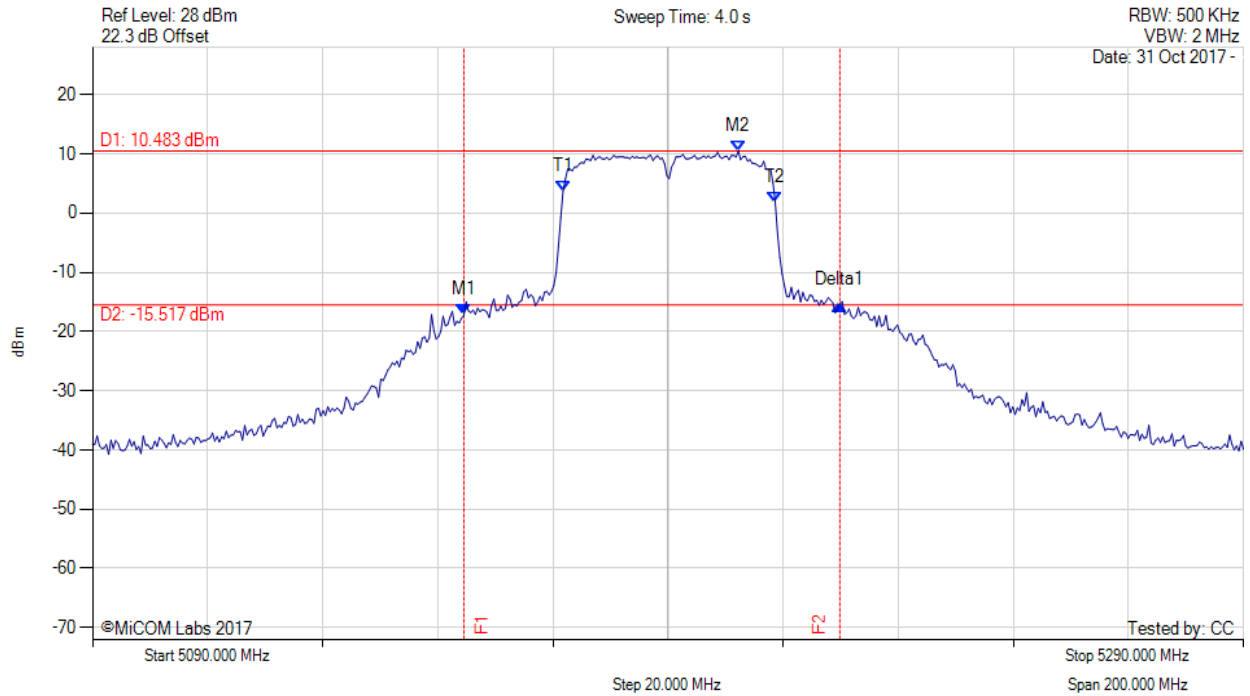

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5154.529 MHz : -17.212 dBm M2 : 5202.224 MHz : 10.483 dBm Delta1 : 65.331 MHz : 1.800 dB T1 : 5171.764 MHz : 3.676 dBm T2 : 5208.637 MHz : 1.779 dBm OBW : 36.874 MHz | Measured 26 dB Bandwidth: 65.331 MHz Measured 99% Bandwidth: 36.874 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variante: 802.11n HT-40, Channel: 5230.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

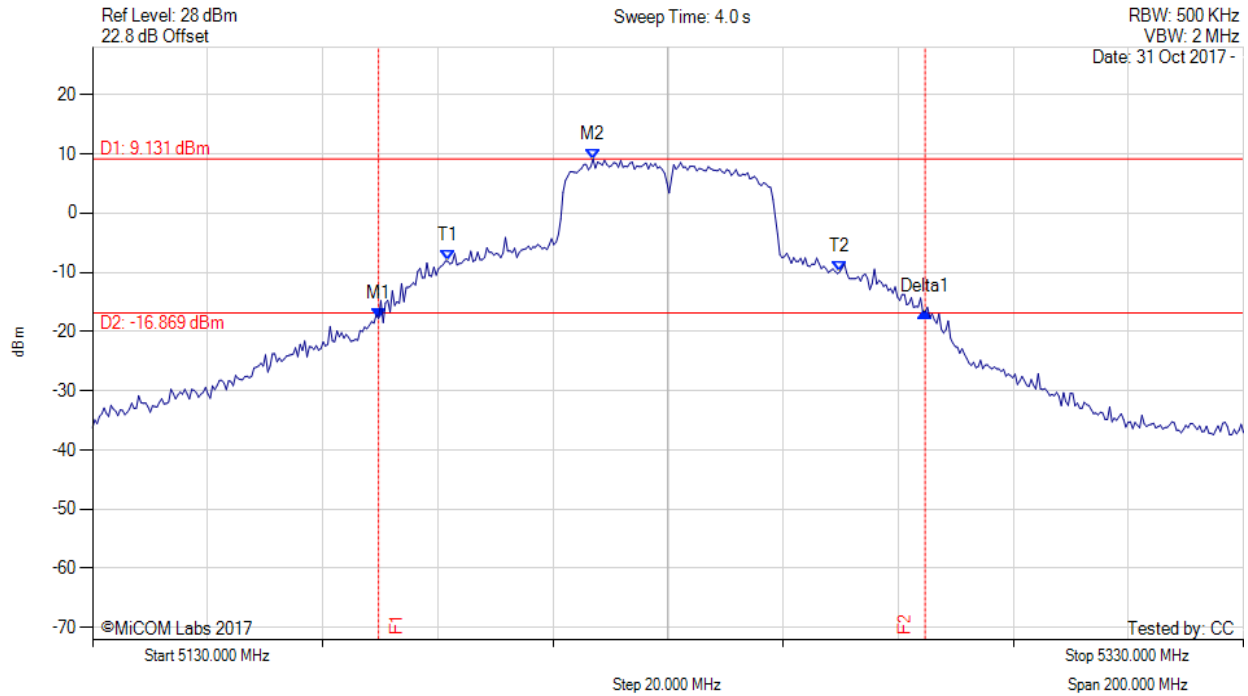

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5179.699 MHz : -17.796 dBm M2 : 5216.974 MHz : 9.131 dBm Delta1 : 94.990 MHz : 1.094 dB T1 : 5191.723 MHz : -8.097 dBm T2 : 5259.860 MHz : -9.903 dBm OBW : 68.136 MHz | Measured 26 dB Bandwidth: 94.990 MHz Measured 99% Bandwidth: 68.136 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH



Variante: 802.11n HT-40, Channel: 5230.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

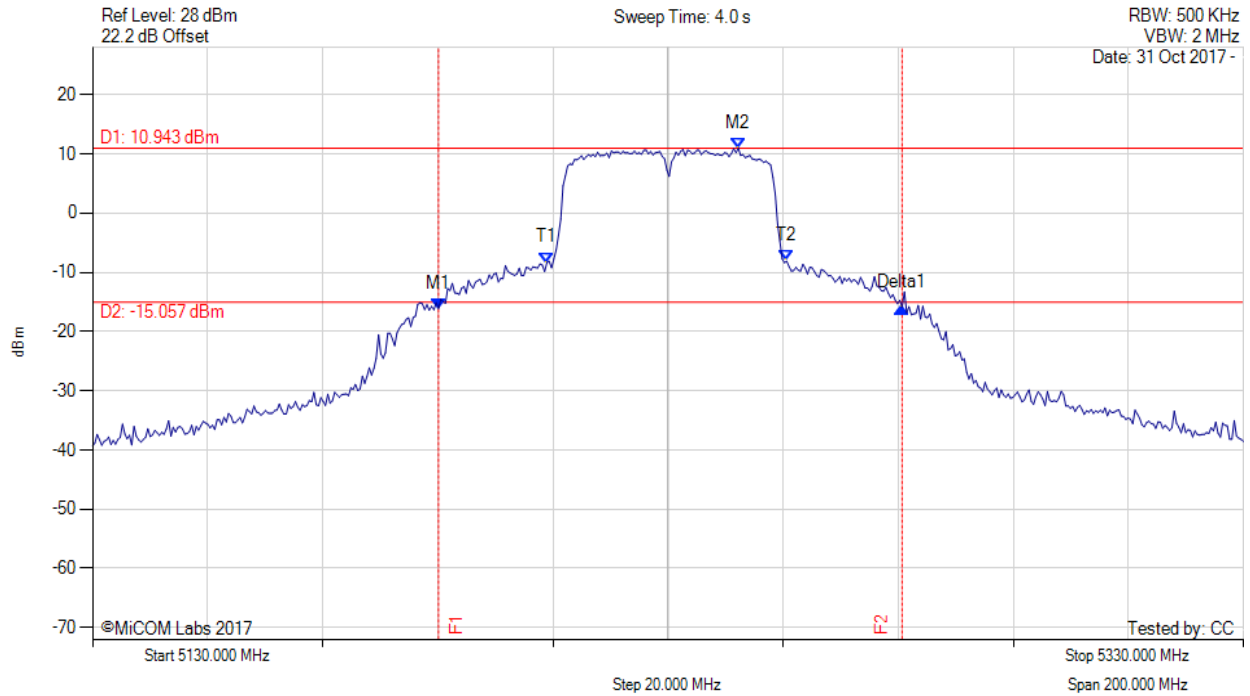

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5190.120 MHz : -16.114 dBm M2 : 5242.224 MHz : 10.943 dBm Delta1 : 80.561 MHz : 0.244 dB T1 : 5208.958 MHz : -8.361 dBm T2 : 5250.641 MHz : -8.121 dBm OBW : 41.683 MHz | Measured 26 dB Bandwidth: 80.561 MHz Measured 99% Bandwidth: 41.683 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




A.2. 6 dB & 99% Bandwidth



6 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

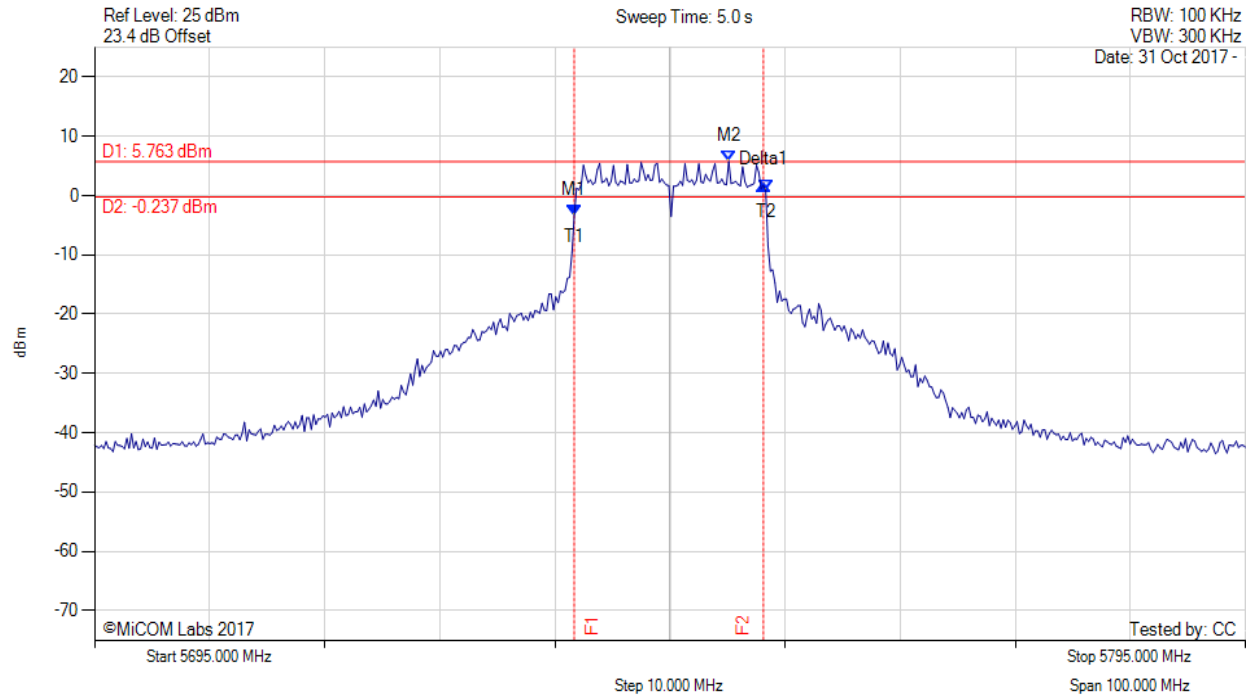

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5736.683 MHz : -3.287 dBm M2 : 5750.110 MHz : 5.763 dBm Delta1 : 16.433 MHz : 5.027 dB T1 : 5736.683 MHz : -3.287 dBm T2 : 5753.317 MHz : 0.802 dBm OBW : 16.633 MHz | Measured 6 dB Bandwidth: 16.433 MHz Measured 99% Bandwidth: 16.633 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

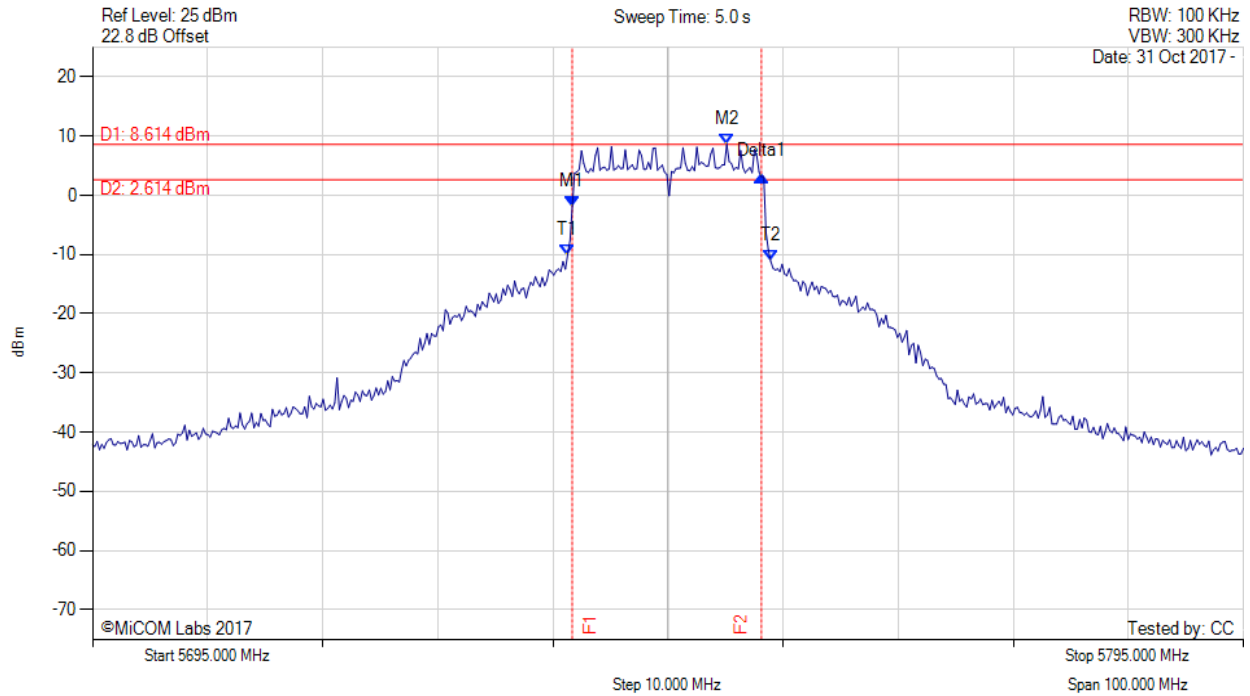

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5736.683 MHz : -1.931 dBm M2 : 5750.110 MHz : 8.614 dBm Delta1 : 16.433 MHz : 5.076 dB T1 : 5736.283 MHz : -9.999 dBm T2 : 5753.918 MHz : -11.083 dBm OBW : 17.635 MHz | Measured 6 dB Bandwidth: 16.433 MHz Measured 99% Bandwidth: 17.635 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 102 of 198



6 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

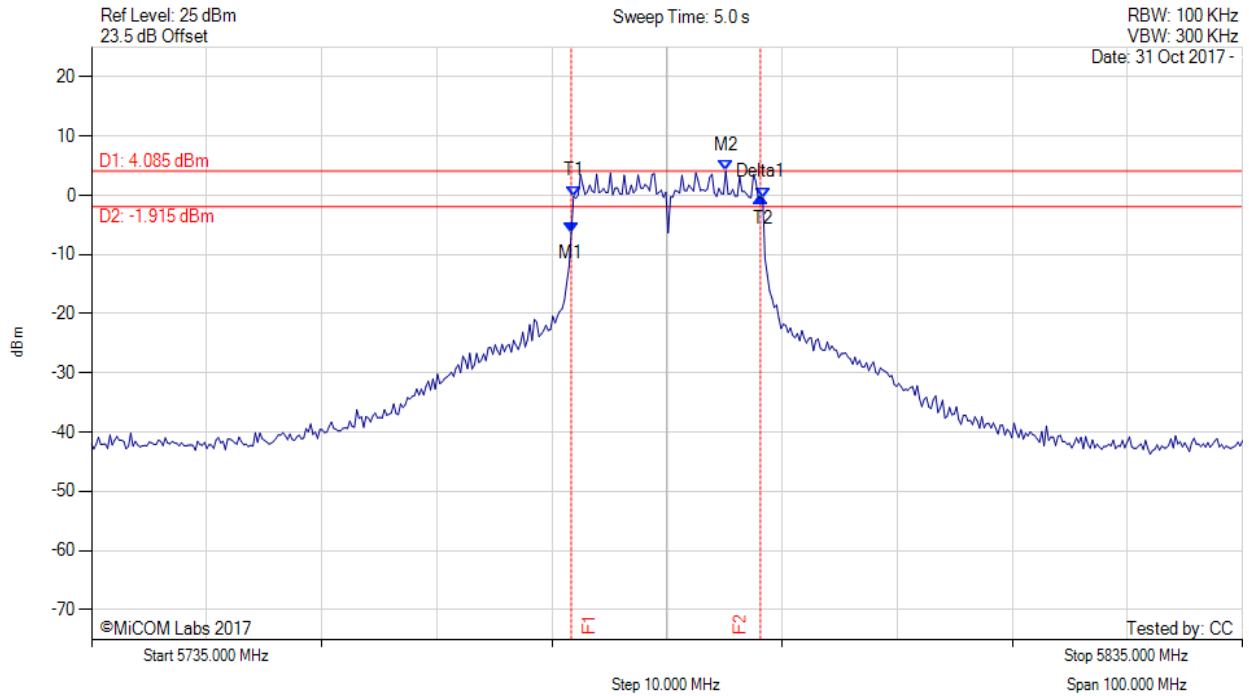

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5776.683 MHz : -6.263 dBm M2 : 5790.110 MHz : 4.085 dBm Delta1 : 16.433 MHz : 5.906 dB T1 : 5776.884 MHz : -0.149 dBm T2 : 5793.317 MHz : -0.373 dBm OBW : 16.433 MHz | Measured 6 dB Bandwidth: 16.433 MHz Measured 99% Bandwidth: 16.433 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 103 of 198



6 dB & 99% BANDWIDTH

Variat: 802.11a, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

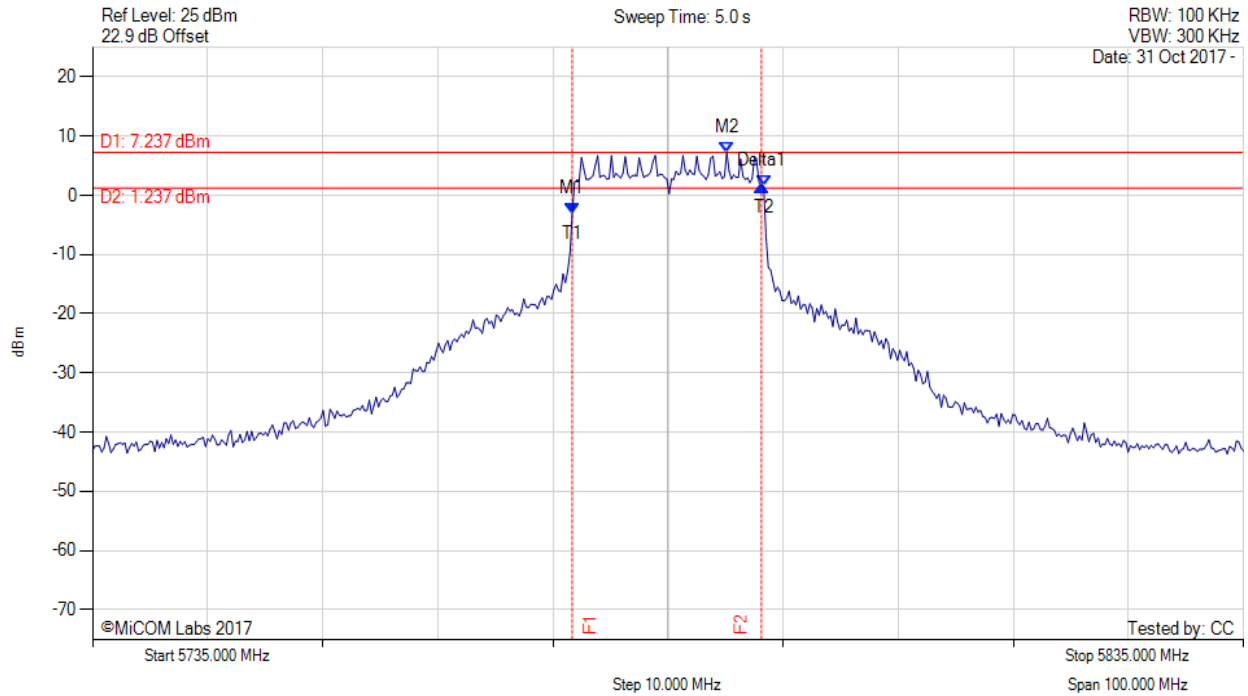

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5776.683 MHz : -2.995 dBm M2 : 5790.110 MHz : 7.237 dBm Delta1 : 16.433 MHz : 4.690 dB T1 : 5776.683 MHz : -2.995 dBm T2 : 5793.317 MHz : 1.510 dBm OBW : 16.633 MHz | Measured 6 dB Bandwidth: 16.433 MHz Measured 99% Bandwidth: 16.633 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 104 of 198



6 dB & 99% BANDWIDTH

Variat: 802.11a, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

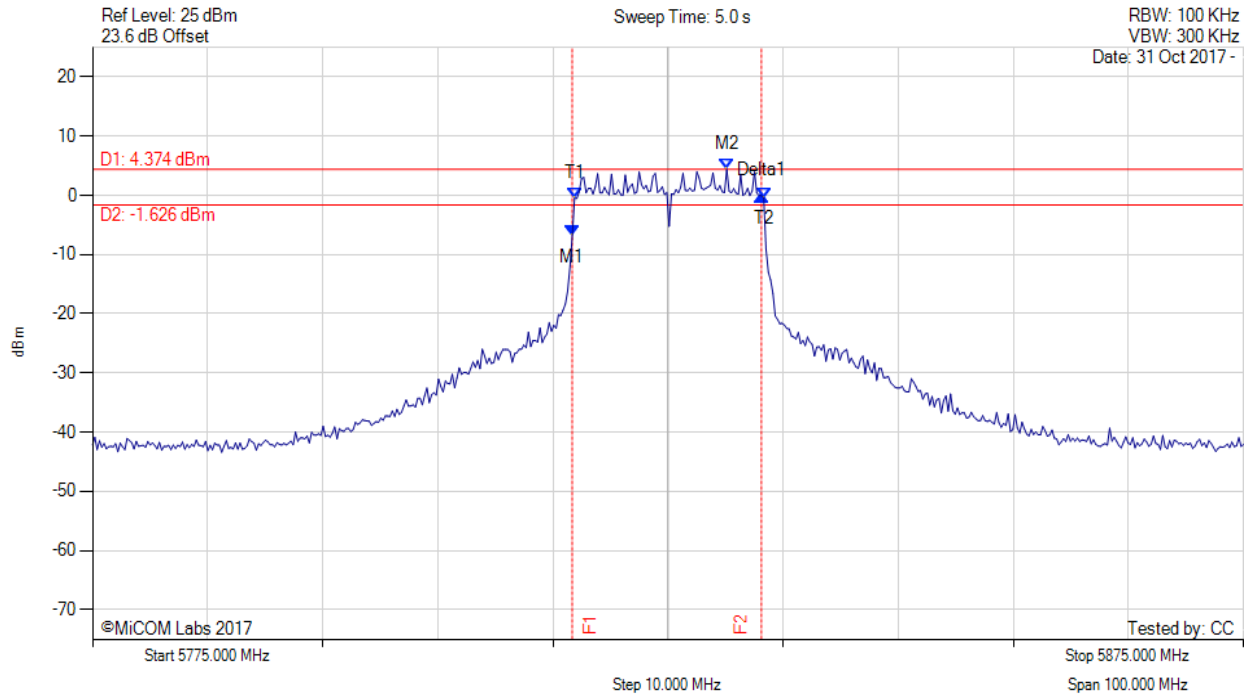

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5816.683 MHz : -6.842 dBm M2 : 5830.110 MHz : 4.374 dBm Delta1 : 16.433 MHz : 6.817 dB T1 : 5816.884 MHz : -0.485 dBm T2 : 5833.317 MHz : -0.385 dBm OBW : 16.433 MHz | Measured 6 dB Bandwidth: 16.433 MHz Measured 99% Bandwidth: 16.433 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 105 of 198



6 dB & 99% BANDWIDTH

Variants: 802.11a, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

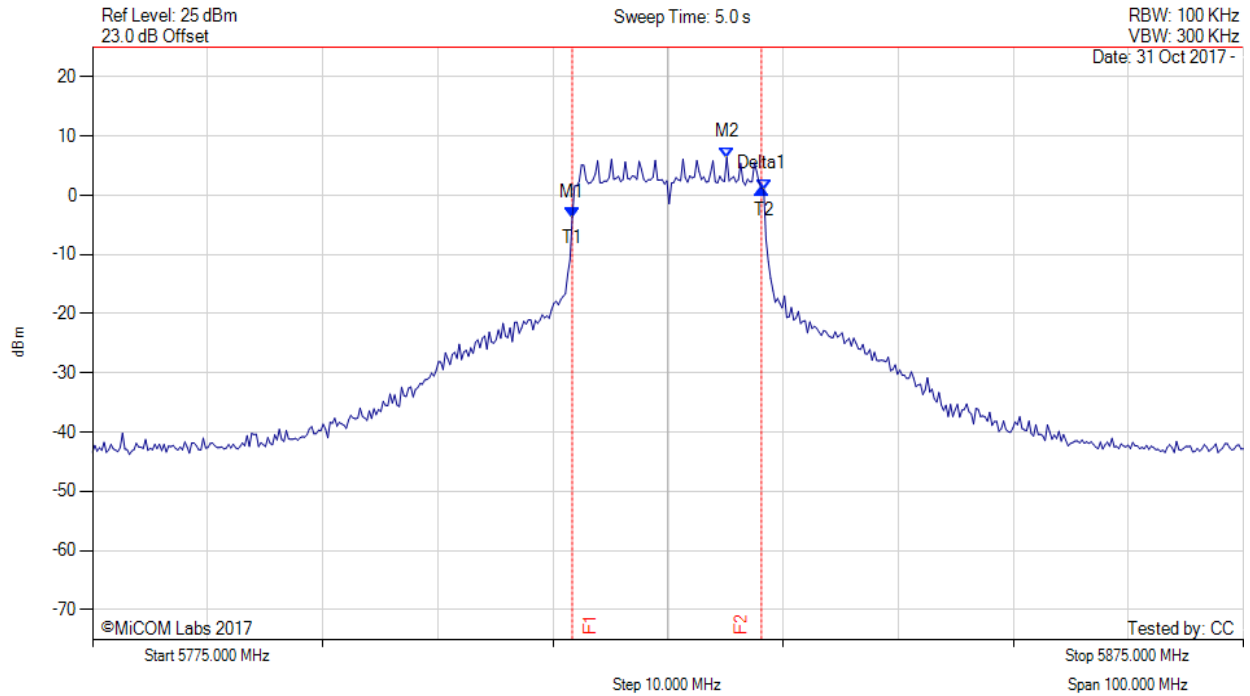

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5816.683 MHz : -3.727 dBm M2 : 5830.110 MHz : 6.403 dBm Delta1 : 16.433 MHz : 4.942 dB T1 : 5816.683 MHz : -3.727 dBm T2 : 5833.317 MHz : 1.028 dBm OBW : 16.633 MHz | Measured 6 dB Bandwidth: 16.433 MHz Measured 99% Bandwidth: 16.633 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

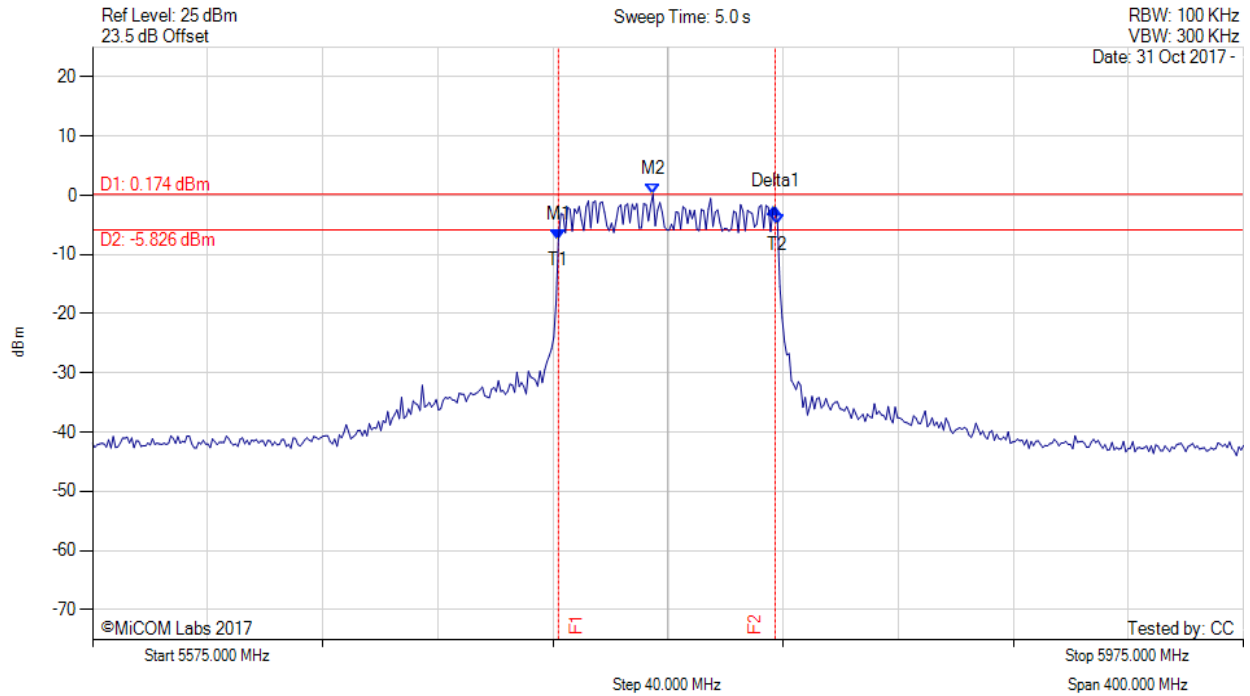

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5736.924 MHz : -7.467 dBm M2 : 5769.790 MHz : 0.174 dBm Delta1 : 75.351 MHz : 5.457 dB T1 : 5736.924 MHz : -7.467 dBm T2 : 5813.076 MHz : -4.898 dBm OBW : 76.152 MHz | Measured 6 dB Bandwidth: 75.351 MHz Measured 99% Bandwidth: 76.152 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

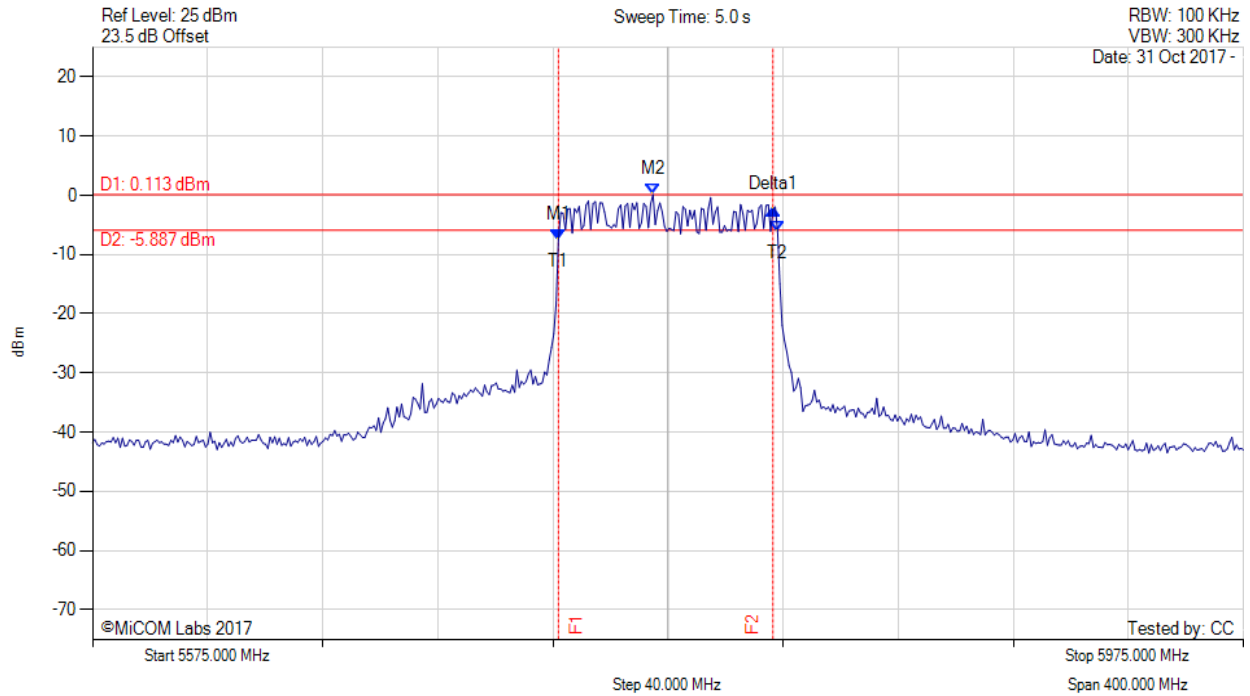

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5736.924 MHz : -7.487 dBm M2 : 5769.790 MHz : 0.113 dBm Delta1 : 74.549 MHz : 5.123 dB T1 : 5736.924 MHz : -7.487 dBm T2 : 5813.076 MHz : -6.116 dBm OBW : 76.152 MHz | Channel Frequency: 5775.00 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

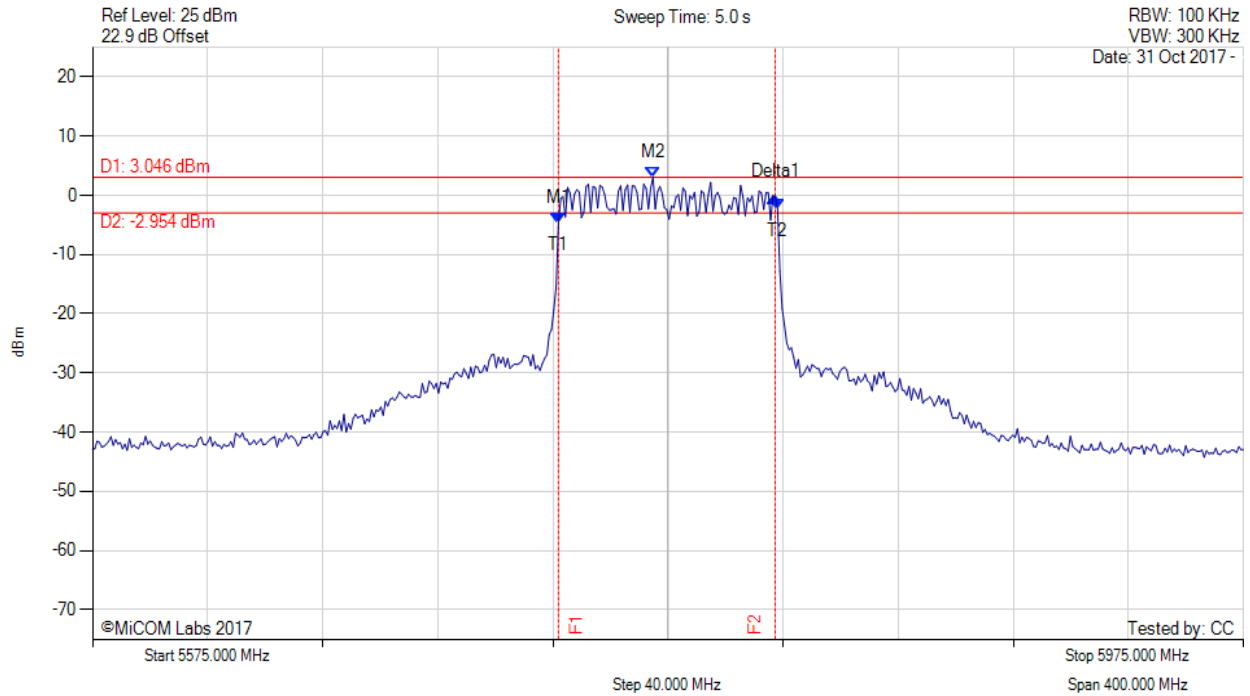

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5736.924 MHz : -4.780 dBm M2 : 5769.790 MHz : 3.046 dBm Delta1 : 75.351 MHz : 4.556 dB T1 : 5736.924 MHz : -4.780 dBm T2 : 5813.076 MHz : -2.364 dBm OBW : 76.152 MHz | Channel Frequency: 5775.00 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

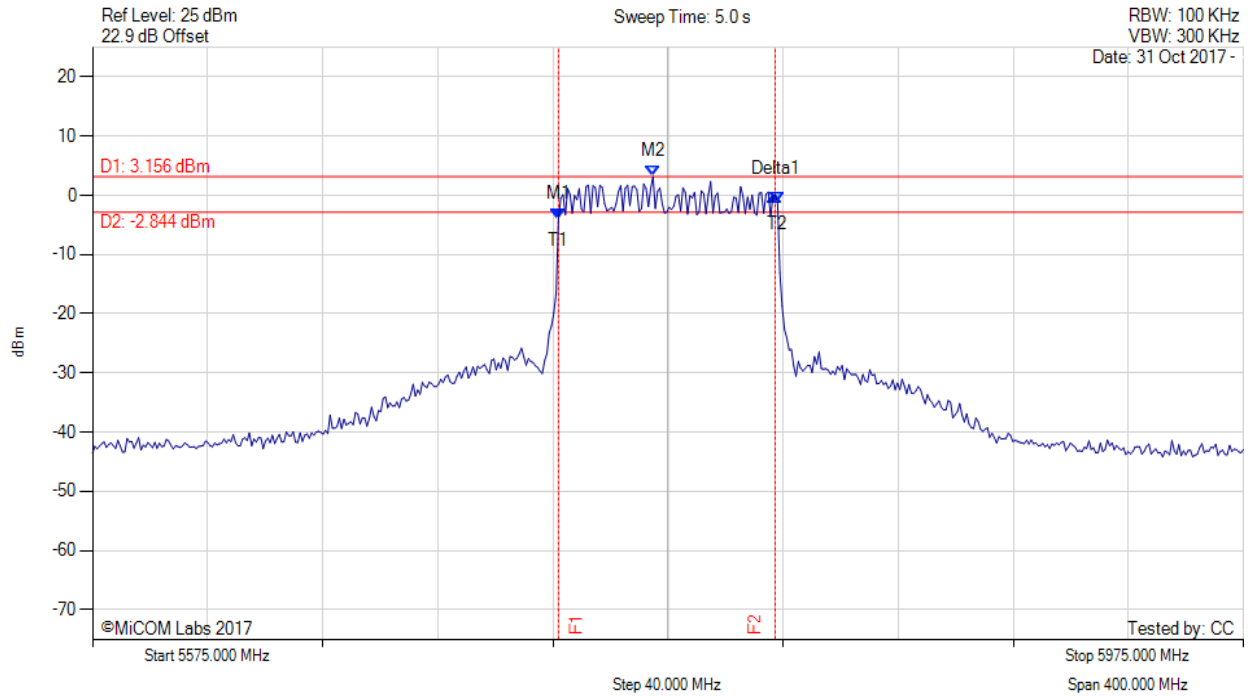

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5736.924 MHz : -4.050 dBm M2 : 5769.790 MHz : 3.156 dBm Delta1 : 75.351 MHz : 4.118 dB T1 : 5736.924 MHz : -4.050 dBm T2 : 5813.076 MHz : -1.262 dBm OBW : 76.152 MHz | Measured 6 dB Bandwidth: 75.351 MHz Measured 99% Bandwidth: 76.152 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

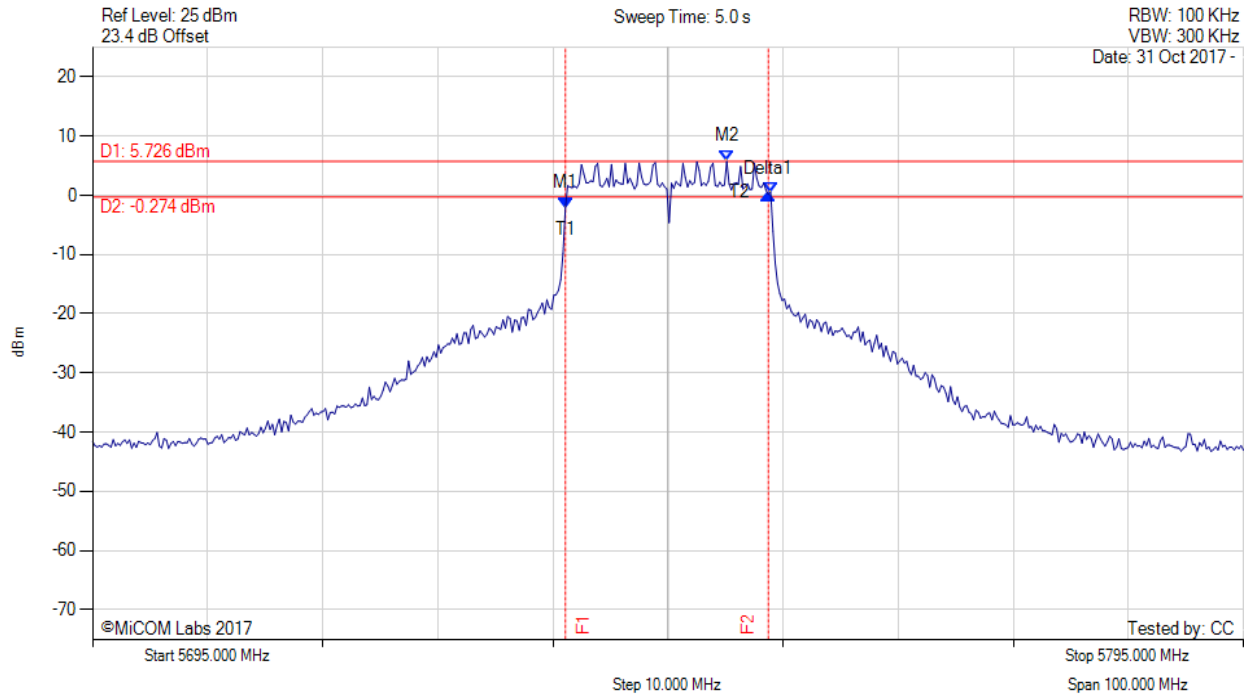

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5736.082 MHz : -2.120 dBm M2 : 5750.110 MHz : 5.726 dBm Delta1 : 17.635 MHz : 2.300 dB T1 : 5736.082 MHz : -2.120 dBm T2 : 5753.918 MHz : 0.514 dBm OBW : 17.836 MHz | Measured 6 dB Bandwidth: 17.635 MHz Measured 99% Bandwidth: 17.836 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

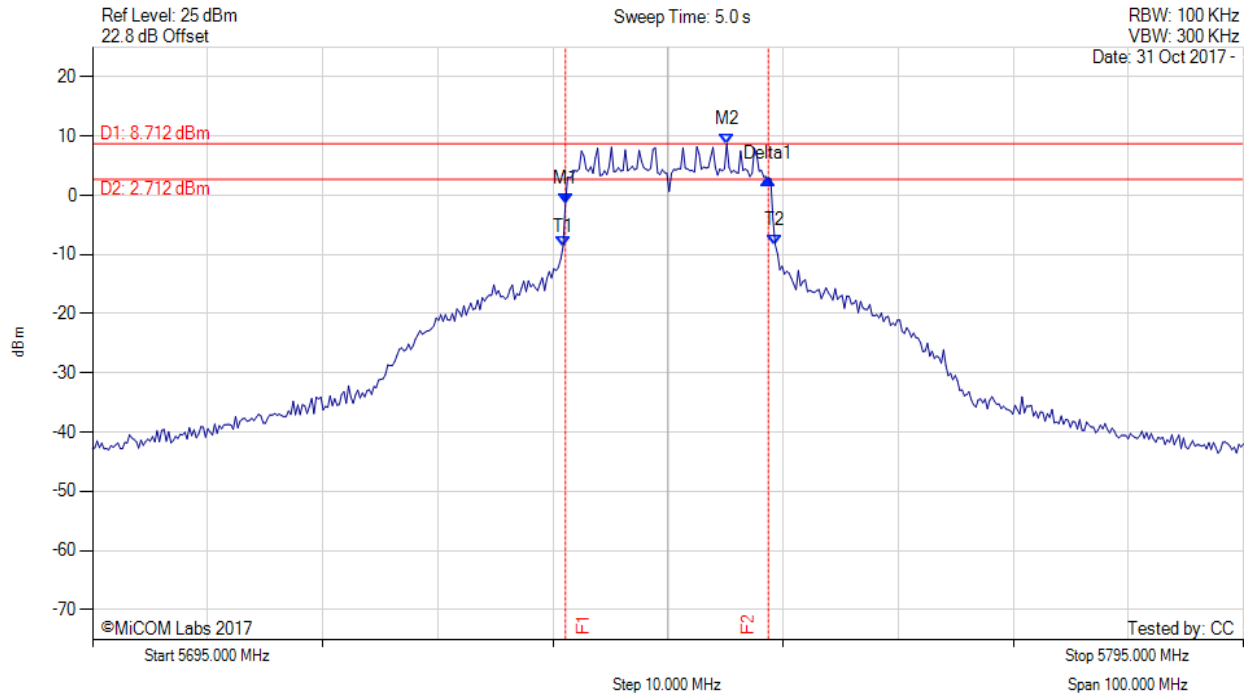

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5736.082 MHz : -1.345 dBm M2 : 5750.110 MHz : 8.712 dBm Delta1 : 17.635 MHz : 4.135 dB T1 : 5735.882 MHz : -8.705 dBm T2 : 5754.319 MHz : -8.374 dBm OBW : 18.437 MHz | Measured 6 dB Bandwidth: 17.635 MHz Measured 99% Bandwidth: 18.437 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

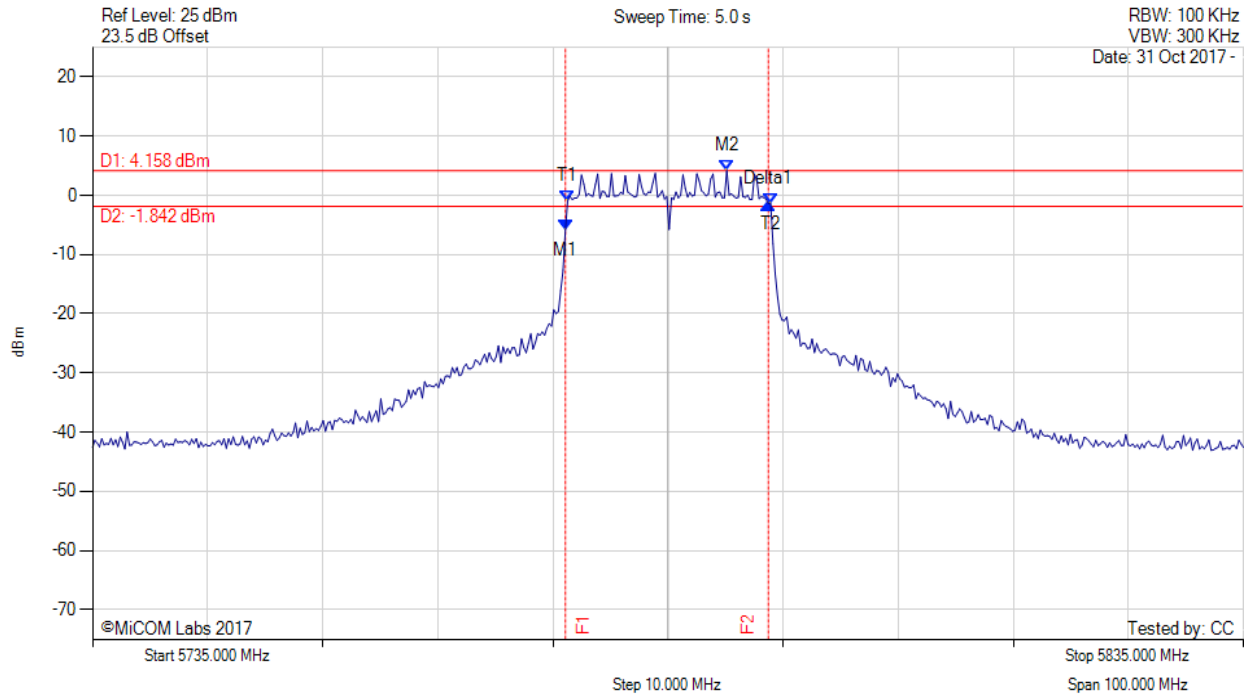

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5776.082 MHz : -5.815 dBm M2 : 5790.110 MHz : 4.158 dBm Delta1 : 17.635 MHz : 4.450 dB T1 : 5776.283 MHz : -0.922 dBm T2 : 5793.918 MHz : -1.335 dBm OBW : 17.635 MHz | Measured 6 dB Bandwidth: 17.635 MHz Measured 99% Bandwidth: 17.635 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 113 of 198



6 dB & 99% BANDWIDTH

Variante: 802.11n HT-20, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

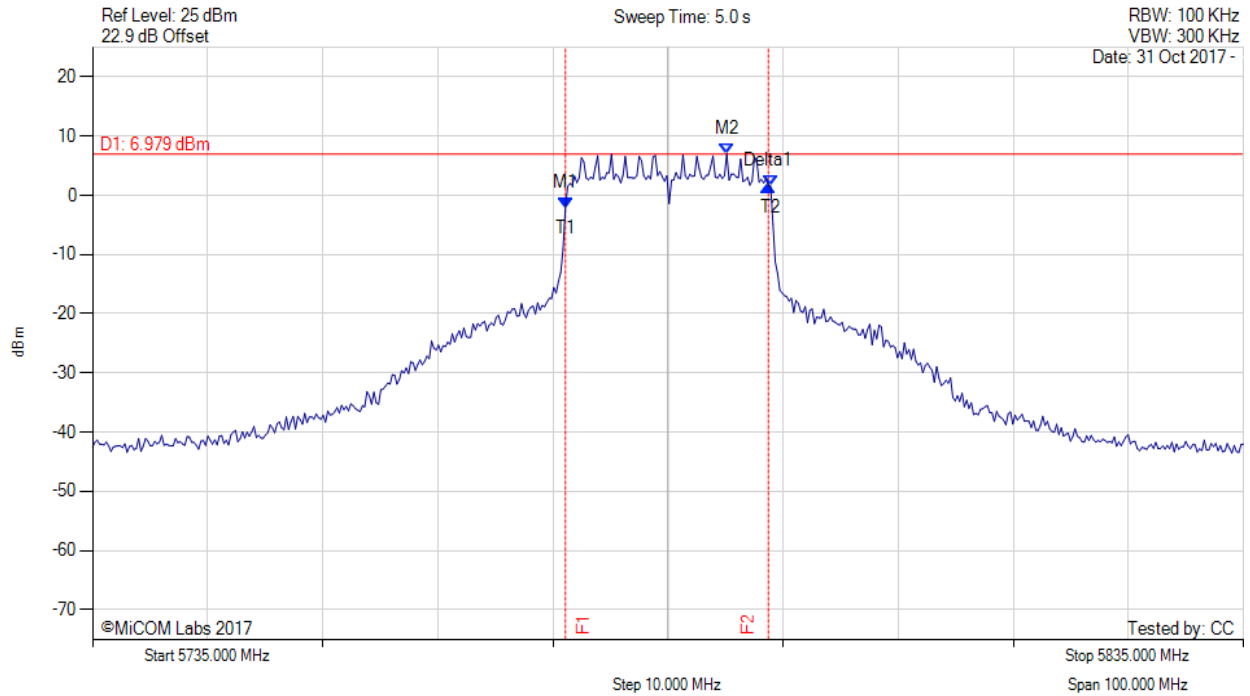

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5776.082 MHz : -2.053 dBm M2 : 5790.110 MHz : 6.979 dBm Delta1 : 17.635 MHz : 3.701 dB T1 : 5776.082 MHz : -2.053 dBm T2 : 5793.918 MHz : 1.547 dBm OBW : 17.836 MHz | Measured 6 dB Bandwidth: 17.635 MHz Measured 99% Bandwidth: 17.836 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

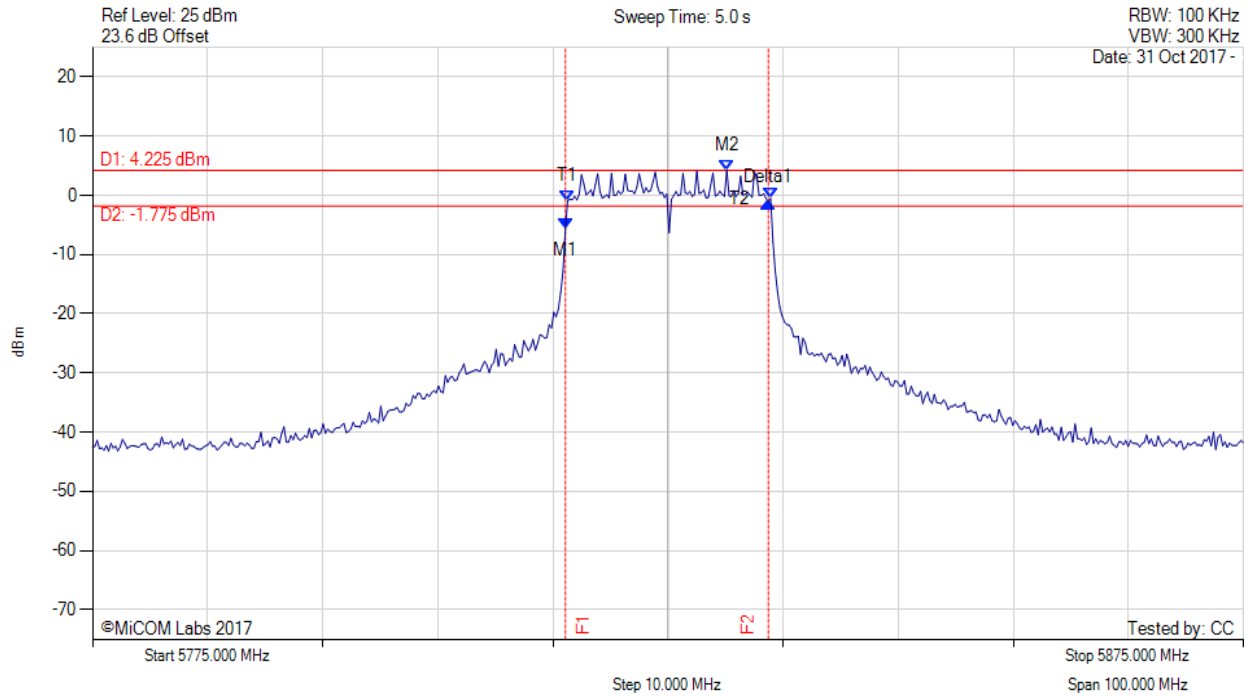

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5816.082 MHz : -5.612 dBm M2 : 5830.110 MHz : 4.225 dBm Delta1 : 17.635 MHz : 4.484 dB T1 : 5816.283 MHz : -0.892 dBm T2 : 5833.918 MHz : -0.544 dBm OBW : 17.635 MHz | Measured 6 dB Bandwidth: 17.635 MHz Measured 99% Bandwidth: 17.635 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

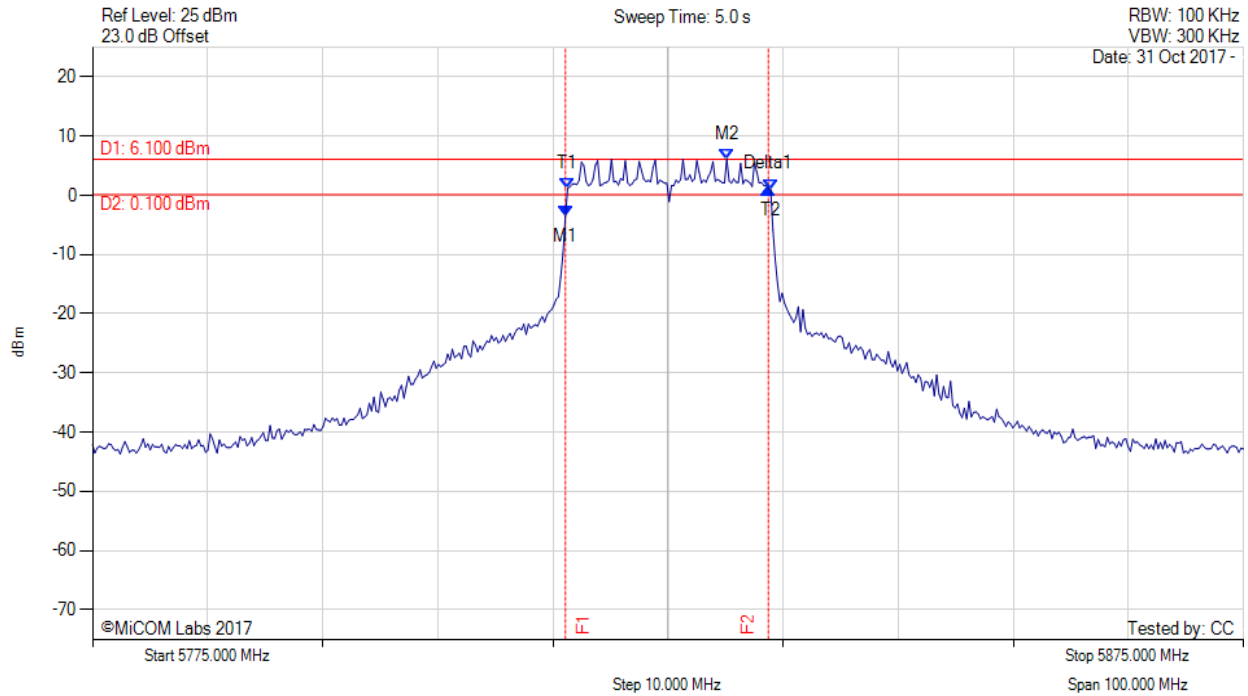

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5816.082 MHz : -3.472 dBm M2 : 5830.110 MHz : 6.100 dBm Delta1 : 17.635 MHz : 4.645 dB T1 : 5816.283 MHz : 1.134 dBm T2 : 5833.918 MHz : 1.012 dBm OBW : 17.635 MHz | Measured 6 dB Bandwidth: 17.635 MHz Measured 99% Bandwidth: 17.635 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

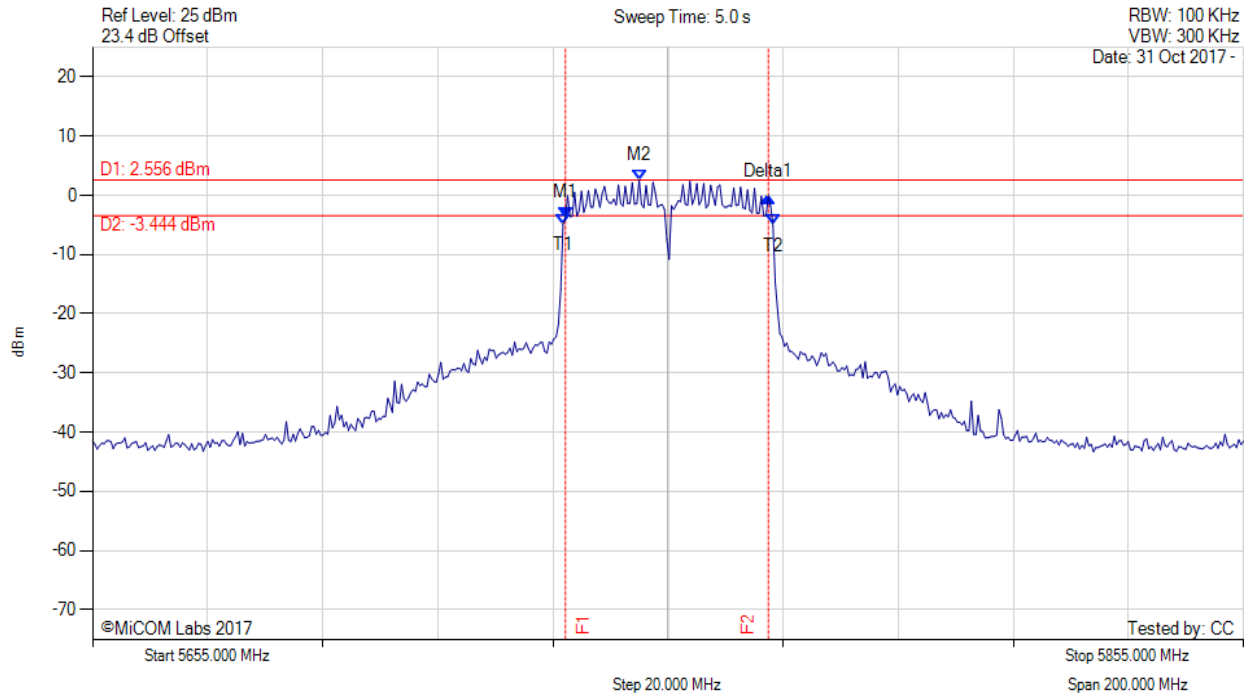

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5737.164 MHz : -3.698 dBm M2 : 5749.990 MHz : 2.556 dBm Delta1 : 35.271 MHz : 3.413 dB T1 : 5736.764 MHz : -4.831 dBm T2 : 5773.236 MHz : -5.042 dBm OBW : 36.473 MHz | Measured 6 dB Bandwidth: 35.271 MHz Measured 99% Bandwidth: 36.473 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

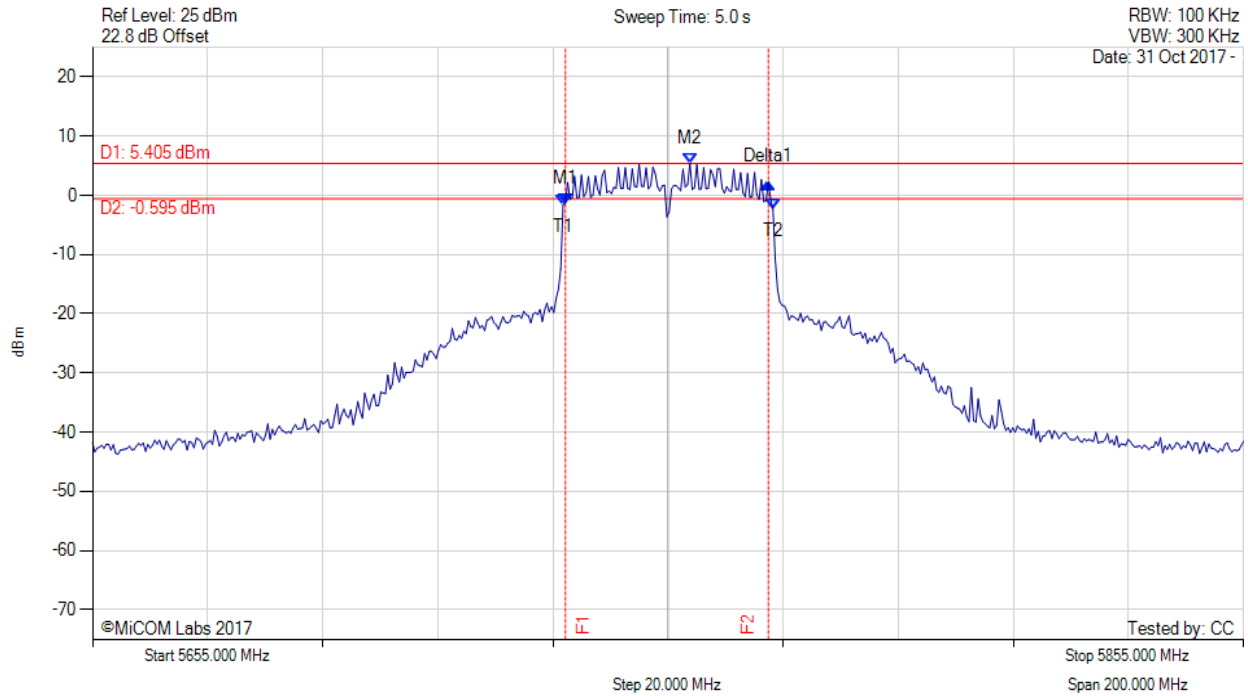

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5737.164 MHz : -1.343 dBm M2 : 5758.808 MHz : 5.405 dBm Delta1 : 35.271 MHz : 3.537 dB T1 : 5736.764 MHz : -1.650 dBm T2 : 5773.236 MHz : -2.405 dBm OBW : 36.473 MHz | Measured 6 dB Bandwidth: 35.271 MHz Measured 99% Bandwidth: 36.473 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 118 of 198



6 dB & 99% BANDWIDTH

Variants: 802.11n HT-40, Channel: 5795.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

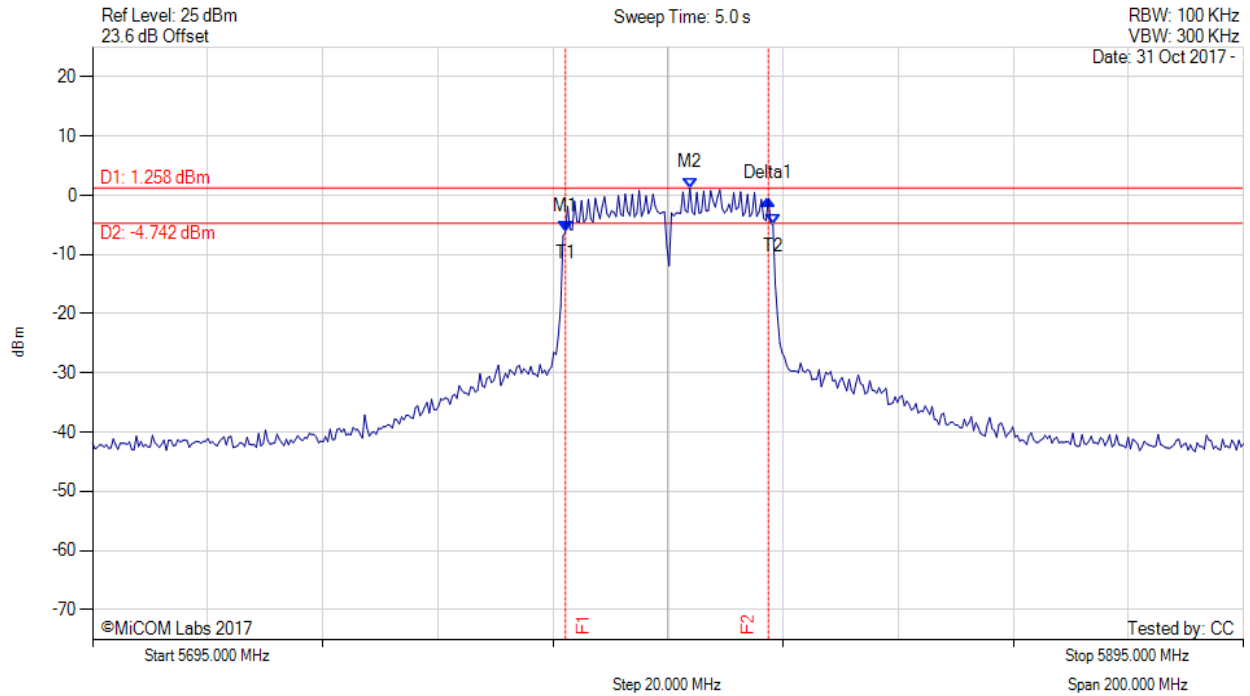

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5777.164 MHz : -6.190 dBm M2 : 5798.808 MHz : 1.258 dBm Delta1 : 35.271 MHz : 5.579 dB T1 : 5777.164 MHz : -6.190 dBm T2 : 5813.236 MHz : -4.953 dBm OBW : 36.072 MHz | Measured 6 dB Bandwidth: 35.271 MHz Measured 99% Bandwidth: 36.072 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 119 of 198



6 dB & 99% BANDWIDTH

Variat: 802.11n HT-40, Channel: 5795.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

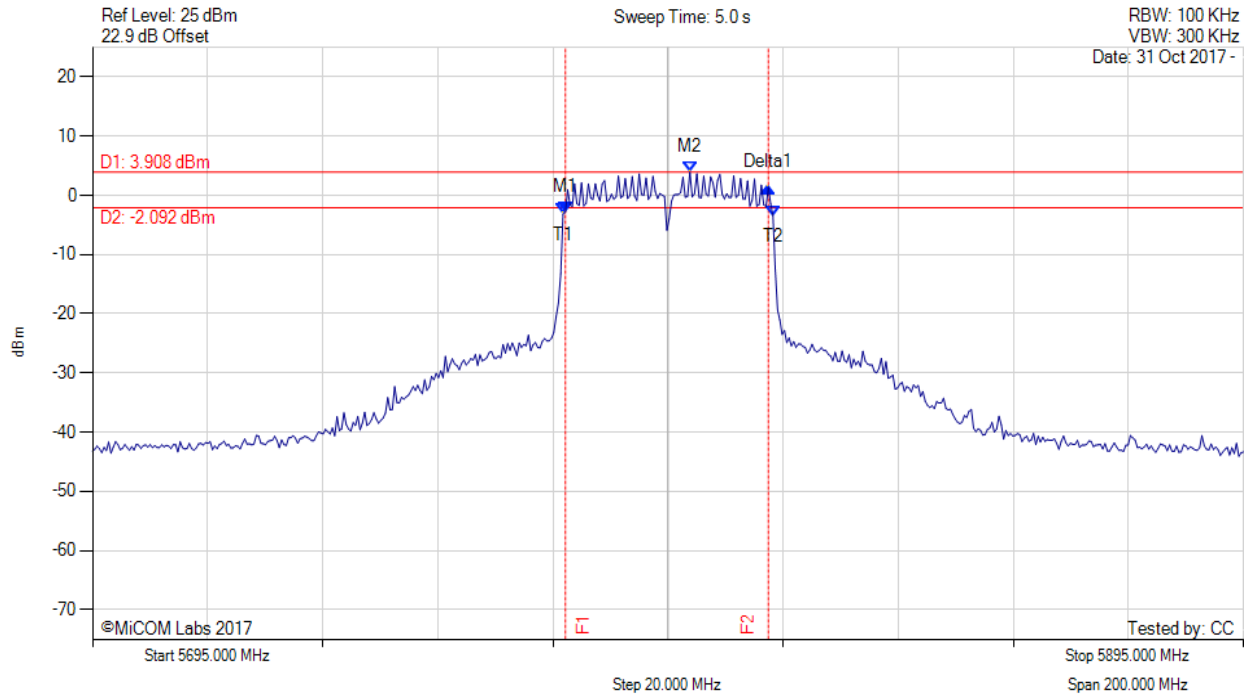

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 5777.164 MHz : -2.848 dBm M2 : 5798.808 MHz : 3.908 dBm Delta1 : 35.271 MHz : 4.185 dB T1 : 5776.764 MHz : -3.143 dBm T2 : 5813.236 MHz : -3.495 dBm OBW : 36.473 MHz | Measured 6 dB Bandwidth: 35.271 MHz Measured 99% Bandwidth: 36.473 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 120 of 198

A.3. Power Spectral Density

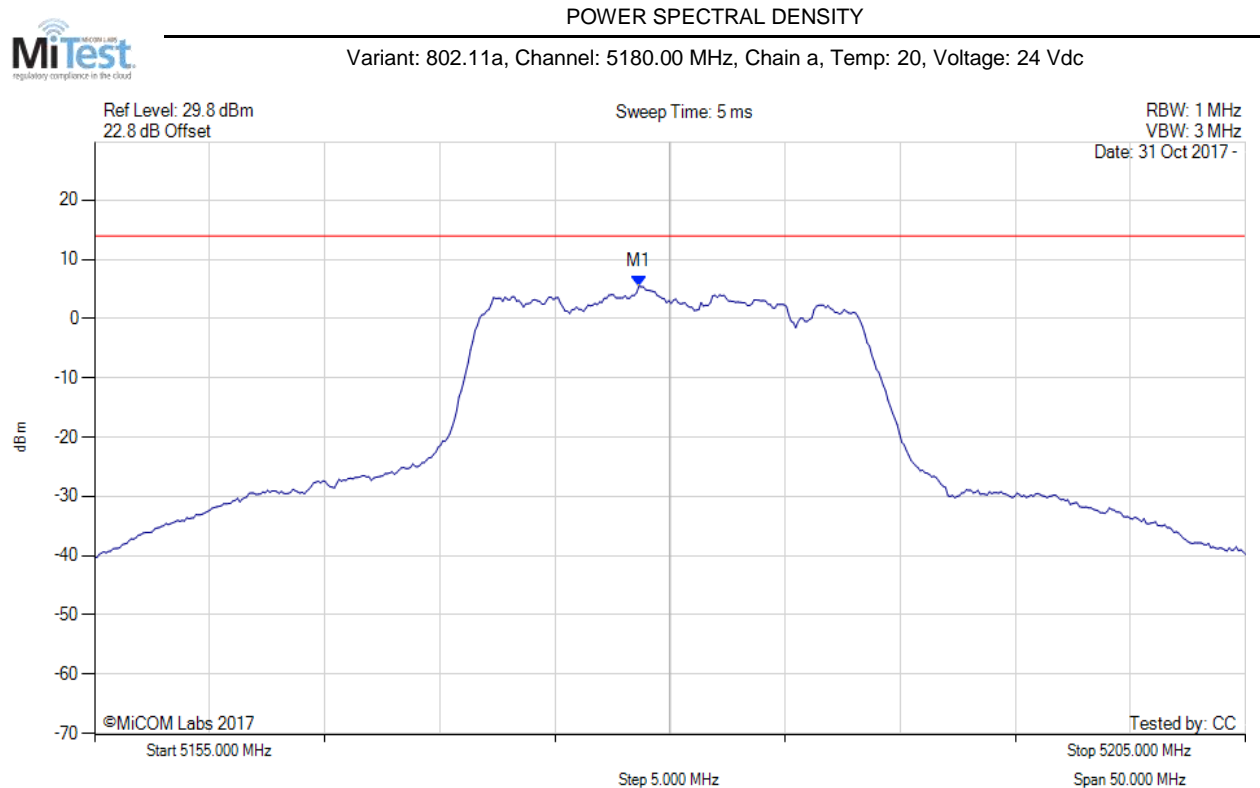

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5178.647 MHz : 5.467 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 121 of 198

POWER SPECTRAL DENSITY



Variants: 802.11a, Channel: 5180.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

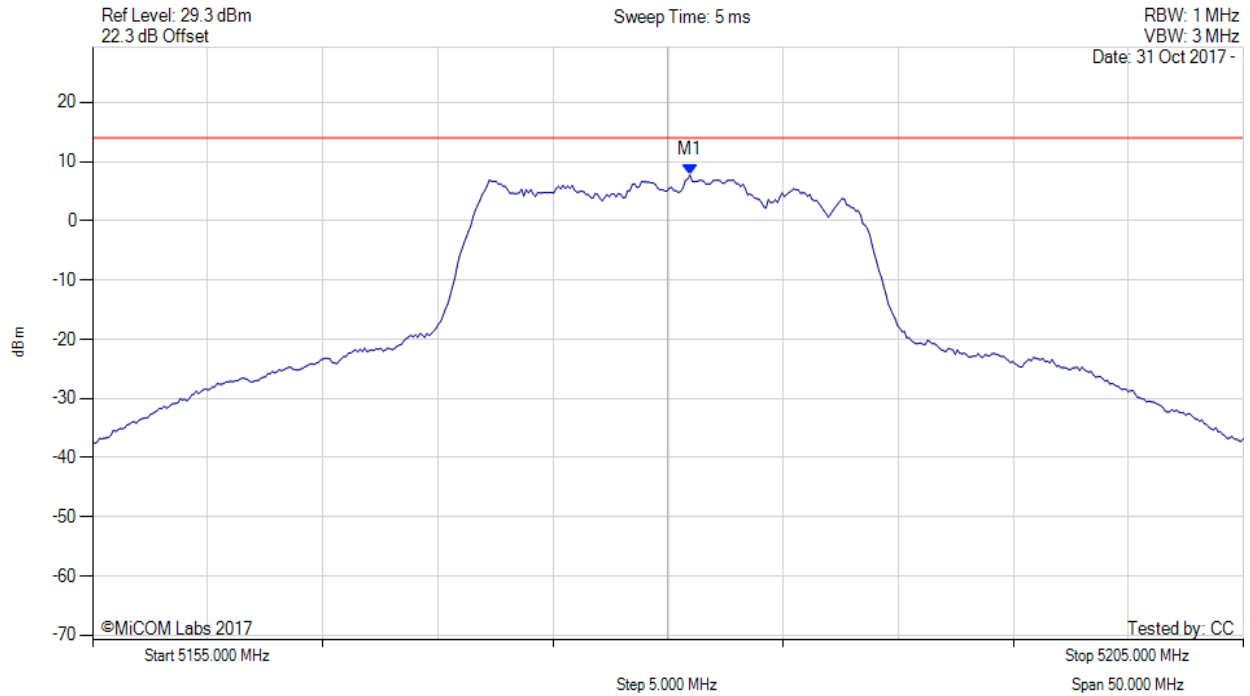

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5180.952 MHz : 7.736 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5180.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

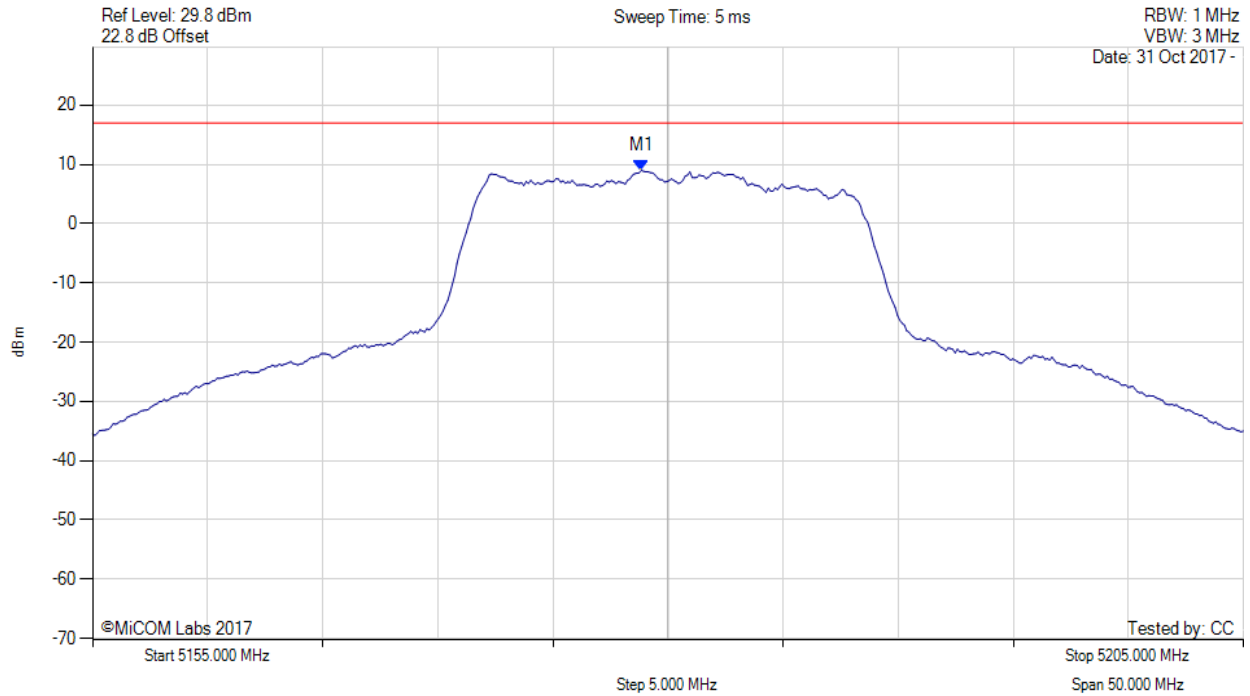

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|---|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5178.800 MHz : 9.054 dBm M1 + DCCF : 5178.800 MHz : 9.098 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 17.0 dBm Margin: -7.9 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 123 of 198

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5200.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

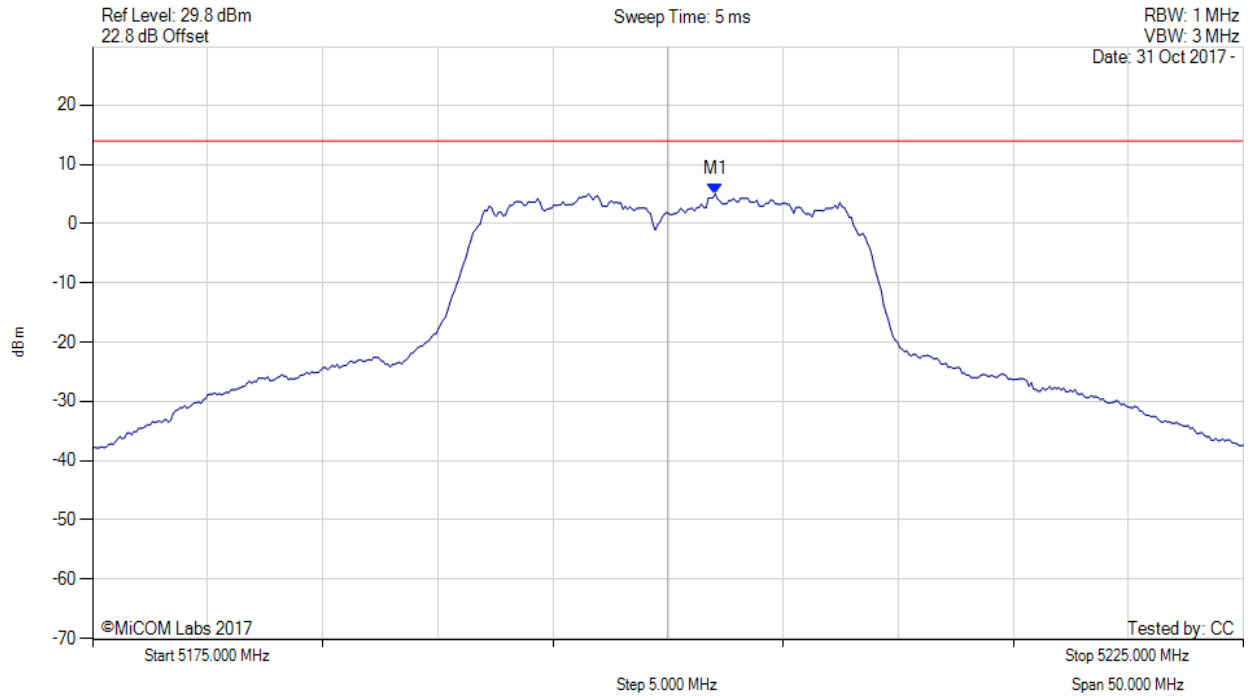

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5202.054 MHz : 5.071 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 124 of 198



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5200.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

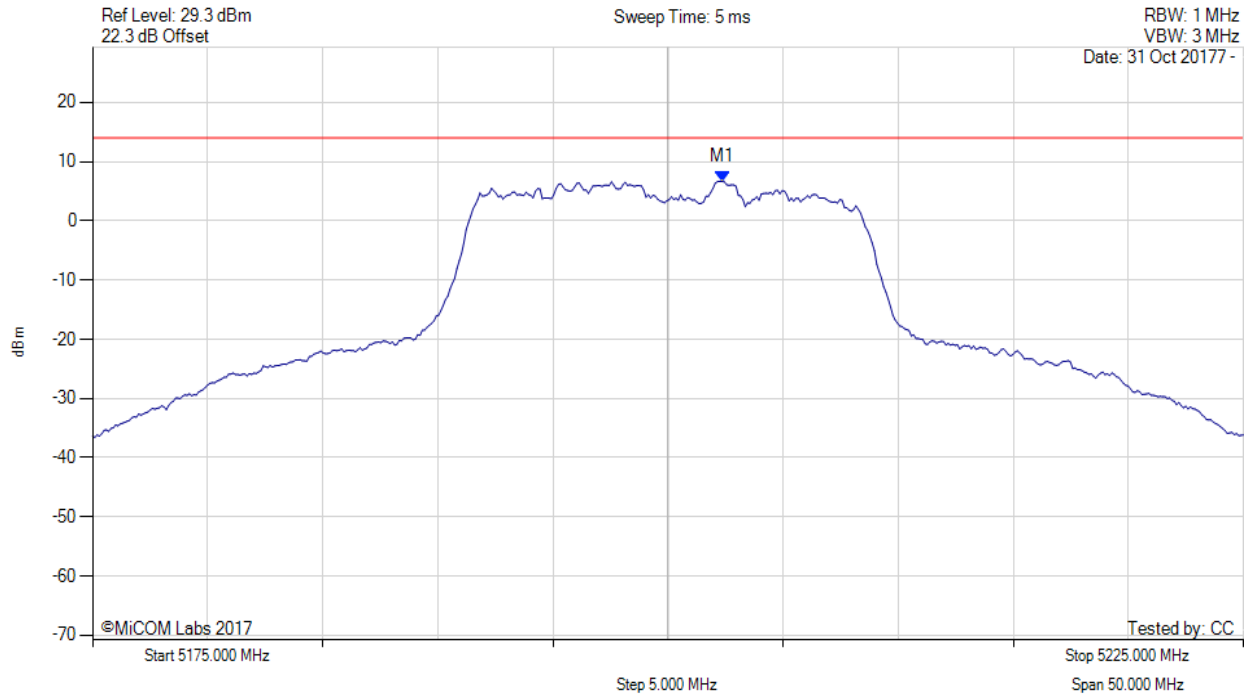

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5202.355 MHz : 6.661 dBm | Channel Frequency: 5200.00 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 125 of 198



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5200.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

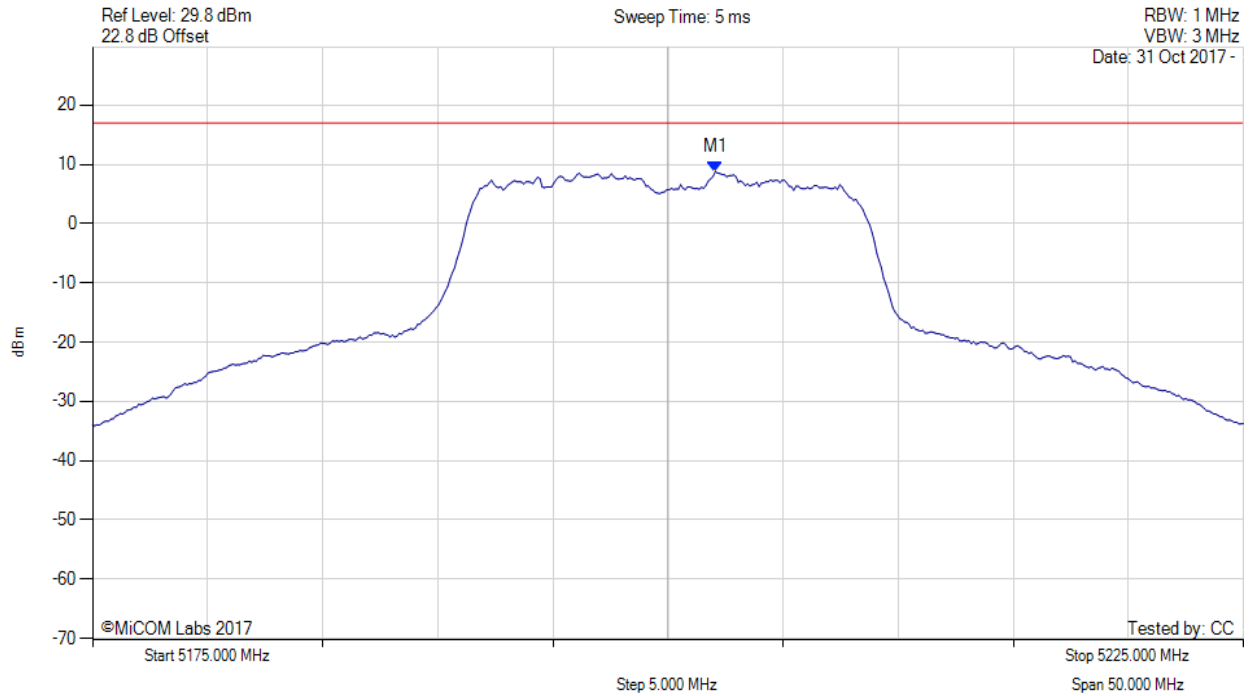

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|---|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5202.100 MHz : 8.775 dBm M1 + DCCF : 5202.100 MHz : 8.819 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 17.0 dBm Margin: -8.2 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 126 of 198



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5240.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

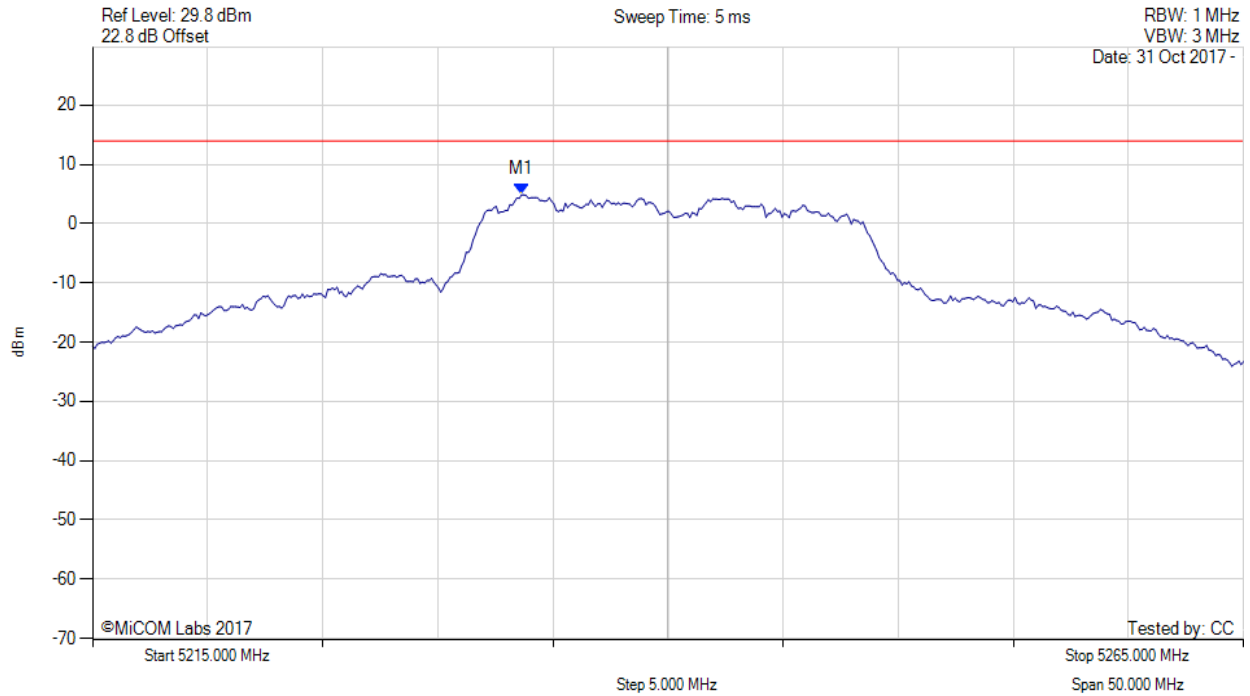

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5233.637 MHz : 4.896 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 127 of 198

POWER SPECTRAL DENSITY



Variante: 802.11a, Channel: 5240.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

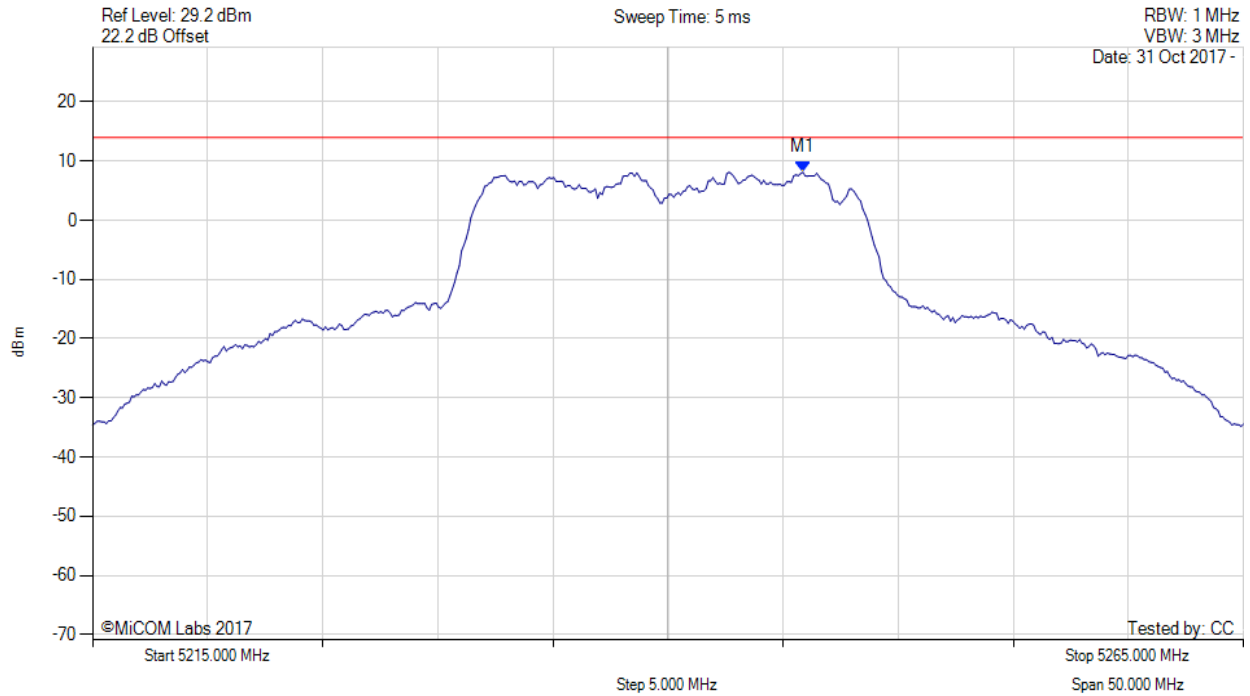

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5245.862 MHz : 8.103 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 128 of 198

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5240.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

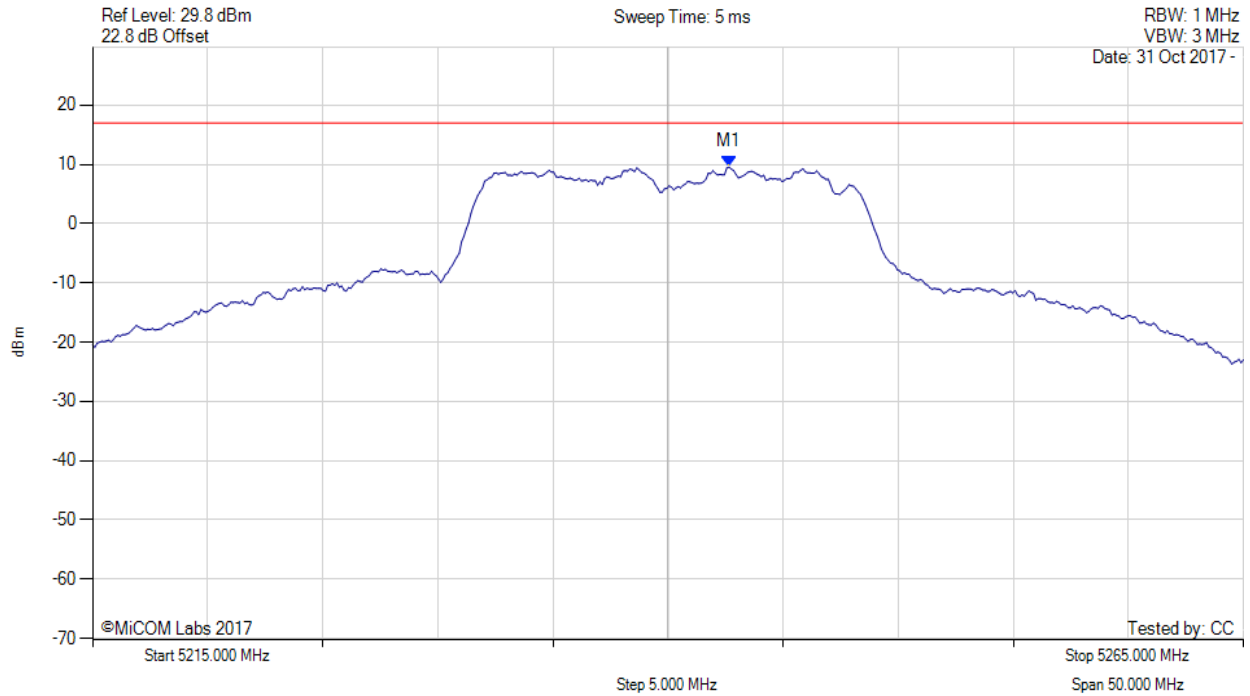

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|---|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5242.700 MHz : 9.571 dBm M1 + DCCF : 5242.700 MHz : 9.615 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 17.0 dBm Margin: -7.4 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 129 of 198

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

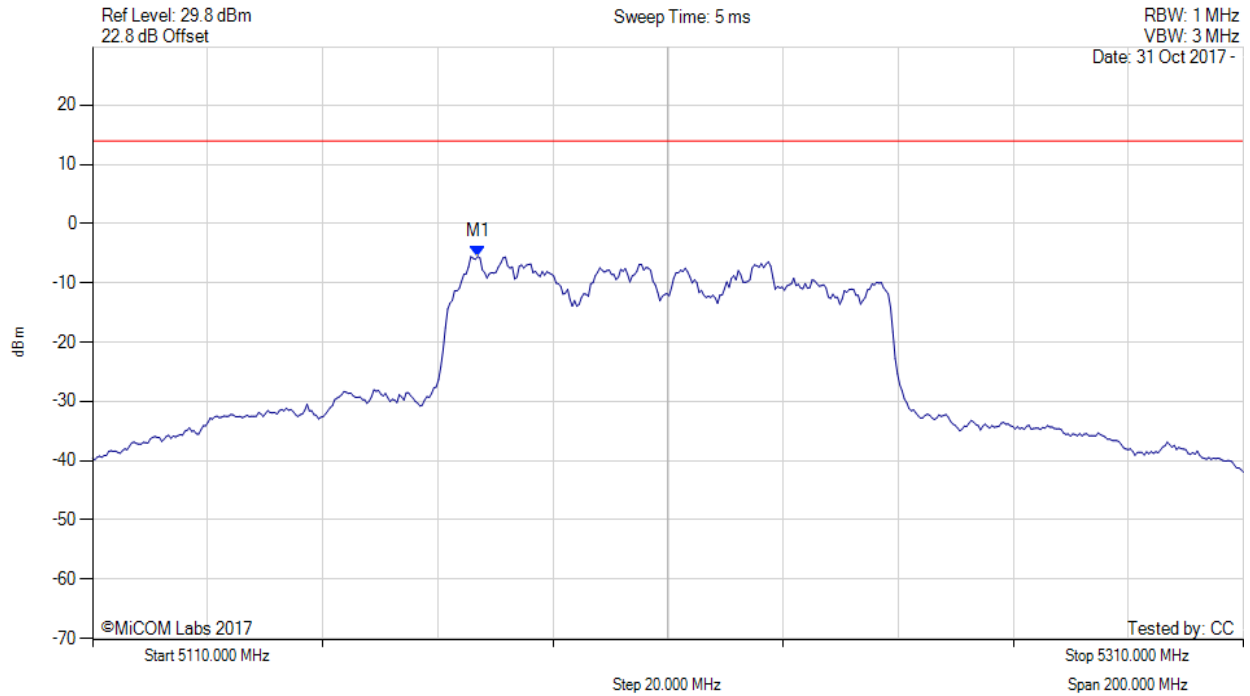

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5176.934 MHz : -5.526 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 130 of 198

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

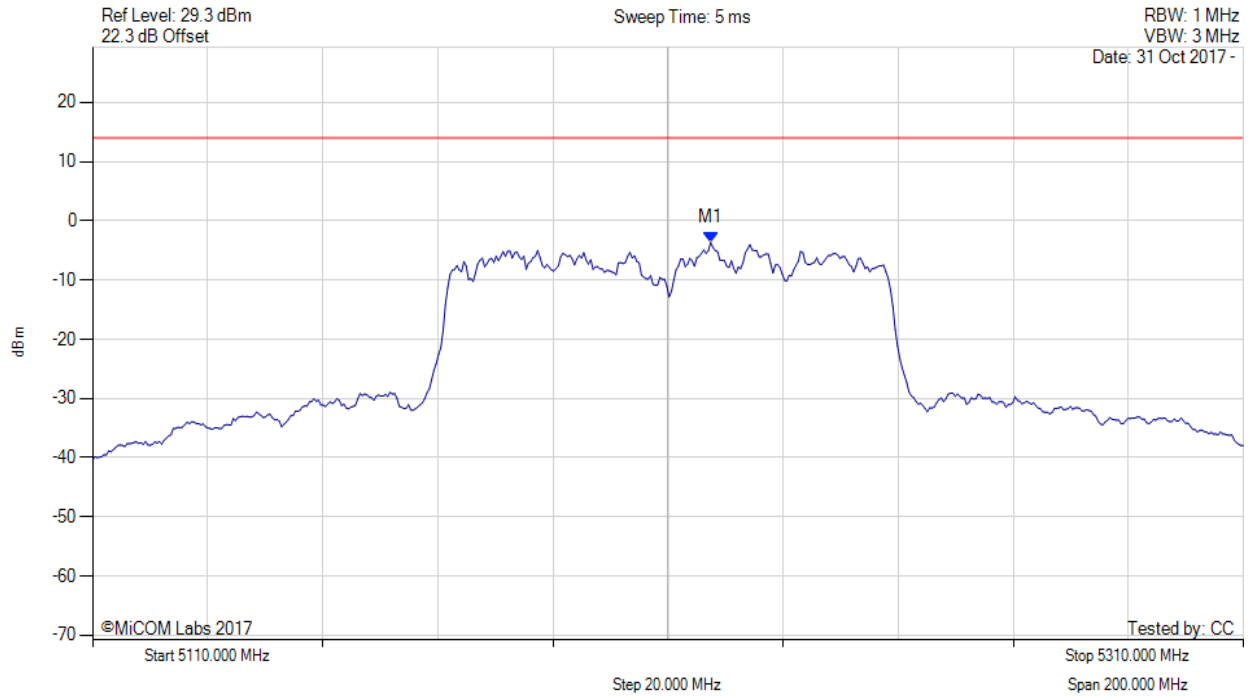

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5217.415 MHz : -3.641 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5210.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

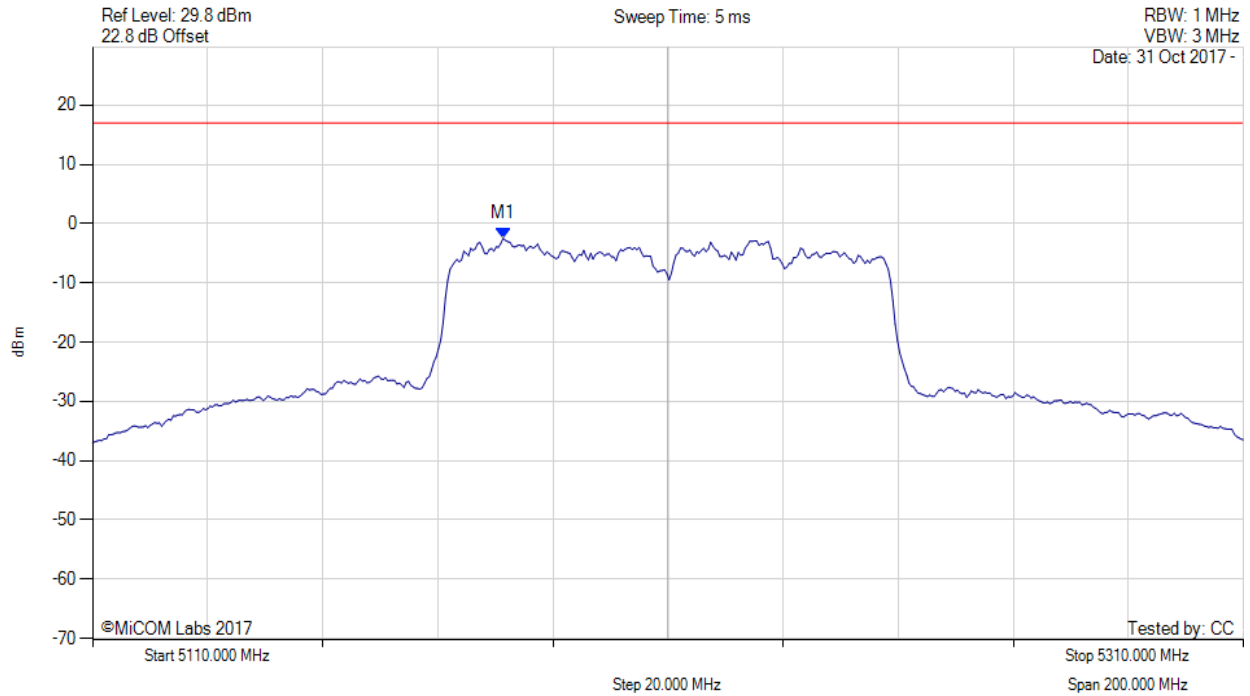

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5181.300 MHz : -2.456 dBm M1 + DCCF : 5181.300 MHz : -2.412 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 17.0 dBm Margin: -19.4 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 132 of 198



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

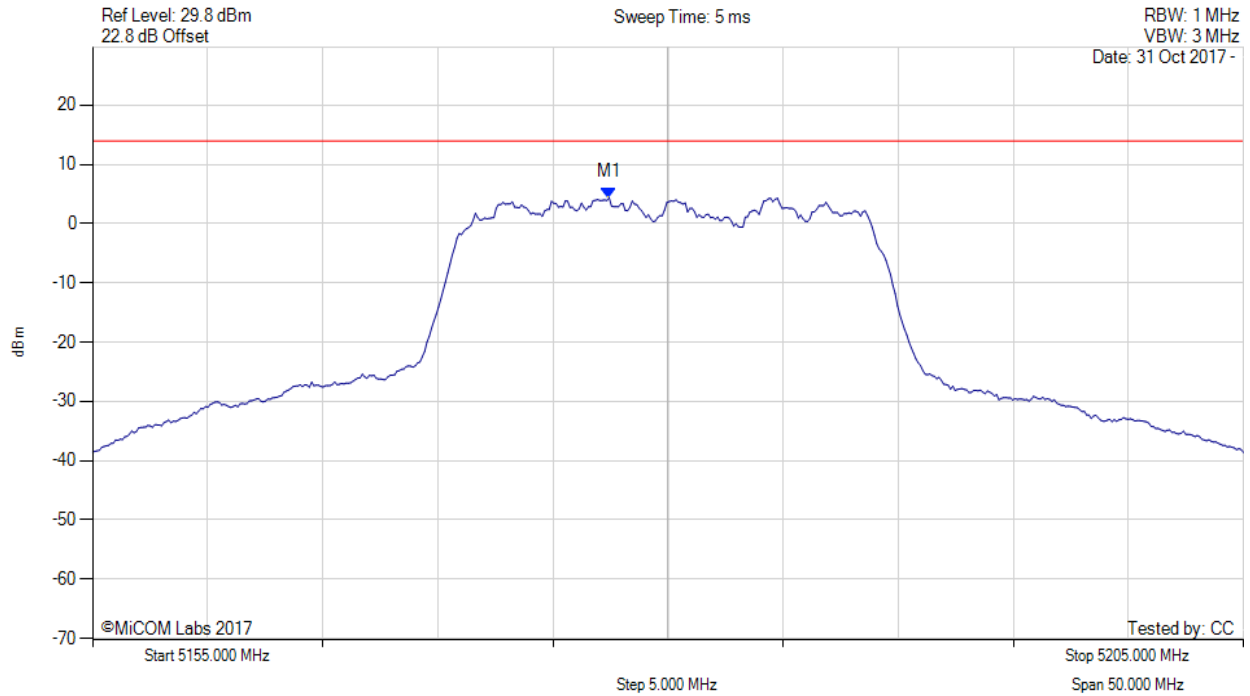

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5177.445 MHz : 4.407 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 133 of 198



POWER SPECTRAL DENSITY

Variants: 802.11n HT-20, Channel: 5180.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

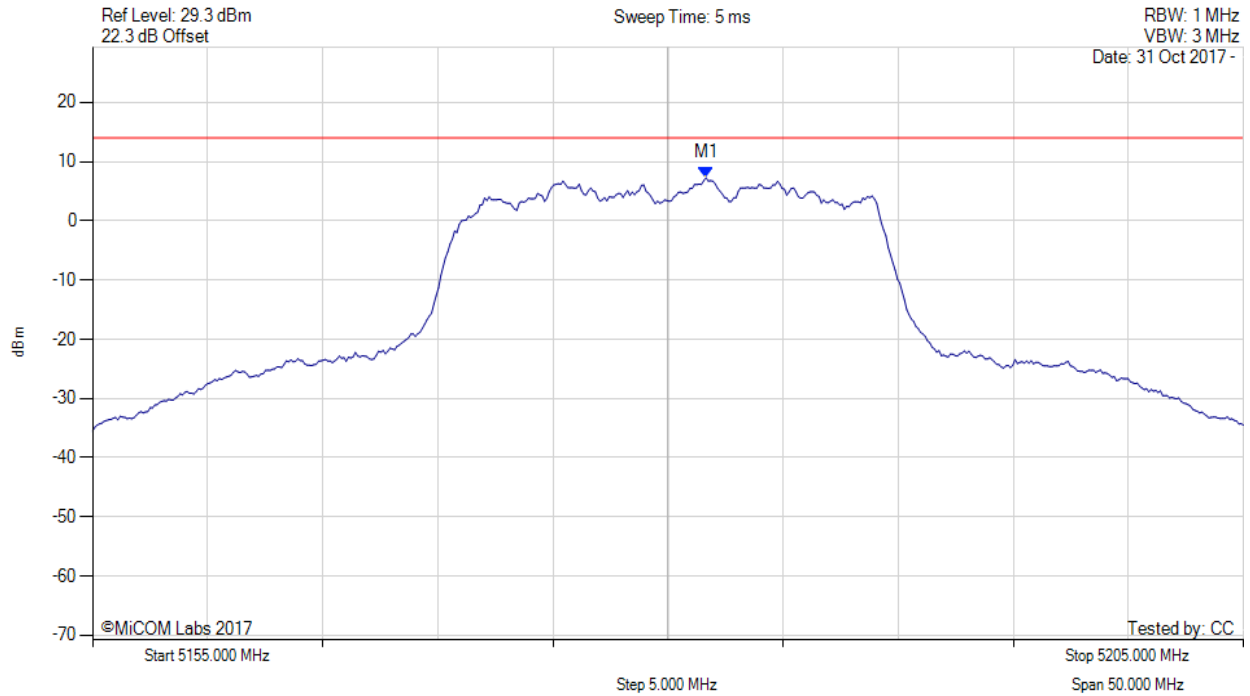

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5181.653 MHz : 7.258 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5180.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

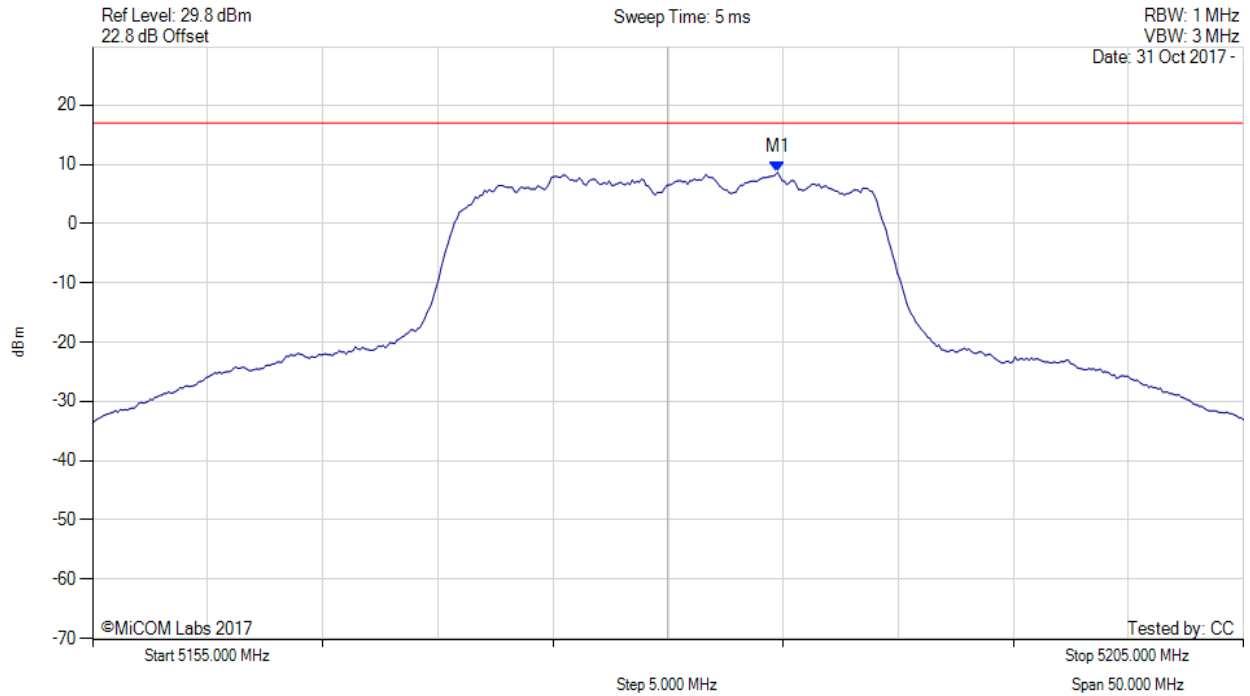

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|---|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5184.800 MHz : 8.666 dBm M1 + DCCF : 5184.800 MHz : 8.710 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 17.0 dBm Margin: -8.3 dB |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variante: 802.11n HT-20, Channel: 5200.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

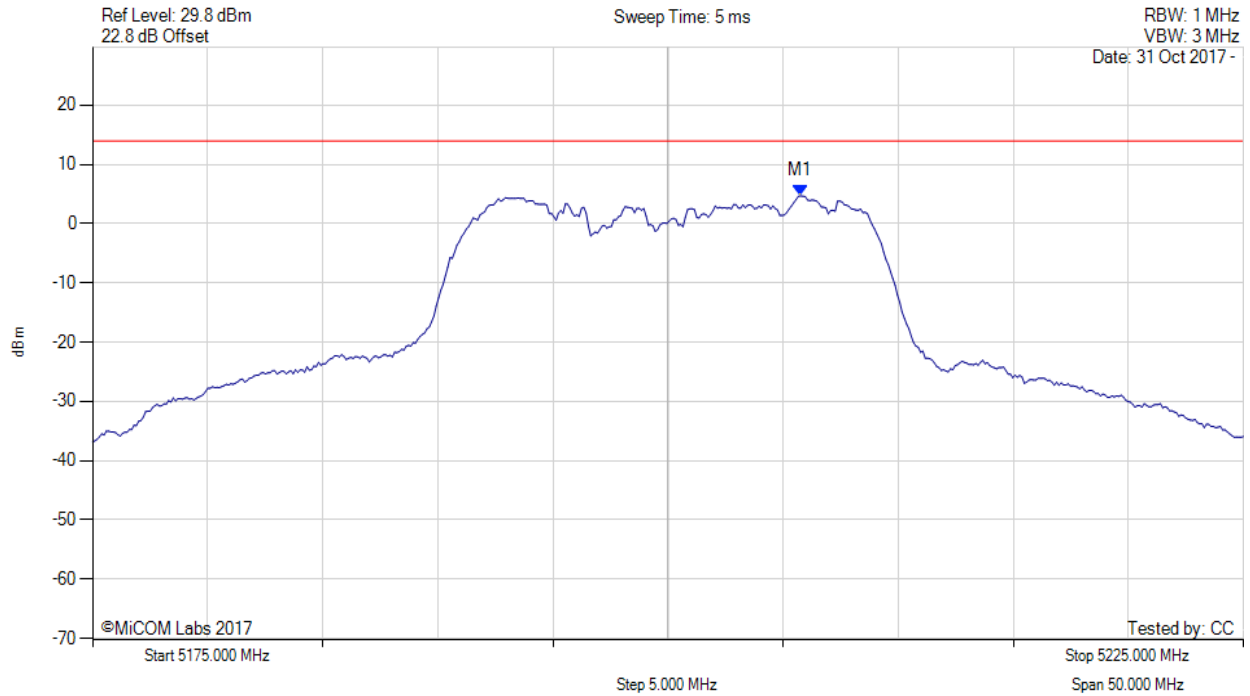

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|---------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5205.762 MHz : 4.716 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 136 of 198

POWER SPECTRAL DENSITY



Variants: 802.11n HT-20, Channel: 5200.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

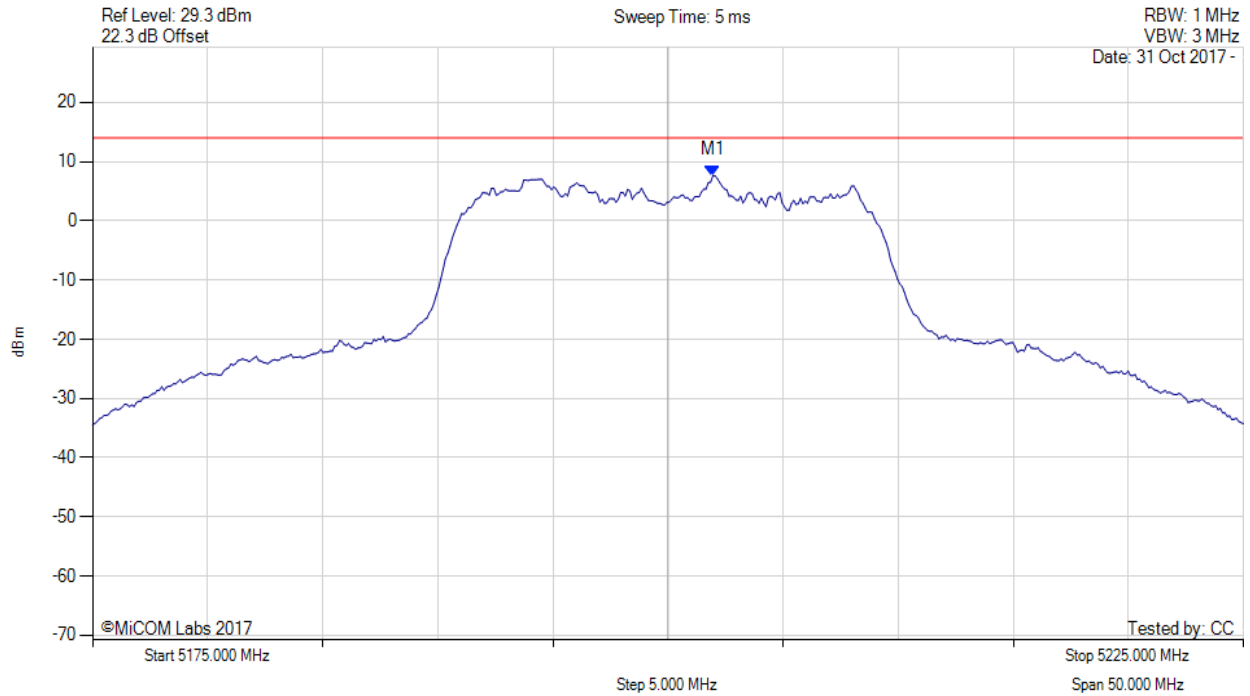

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5201.954 MHz : 7.642 dBm | Channel Frequency: 5200.00 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 137 of 198

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5200.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

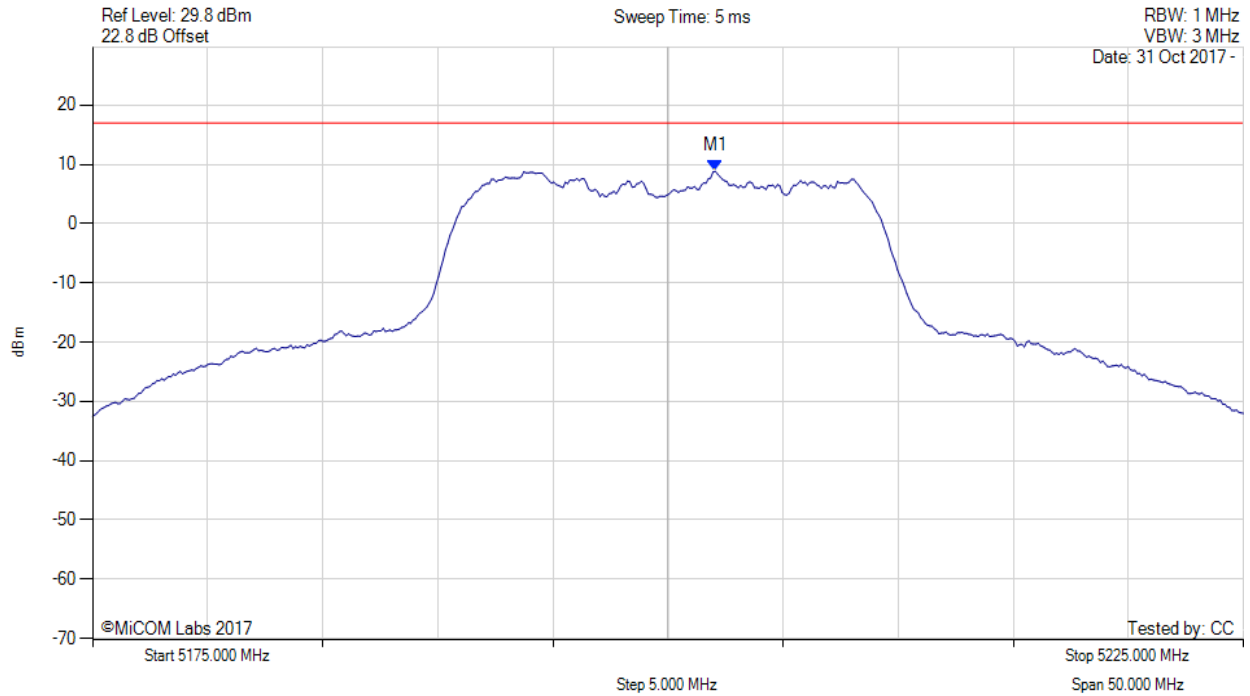

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|---|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5202.100 MHz : 8.876 dBm M1 + DCCF : 5202.100 MHz : 8.920 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 17.0 dBm Margin: -8.1 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 138 of 198



POWER SPECTRAL DENSITY

Variants: 802.11n HT-20, Channel: 5240.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

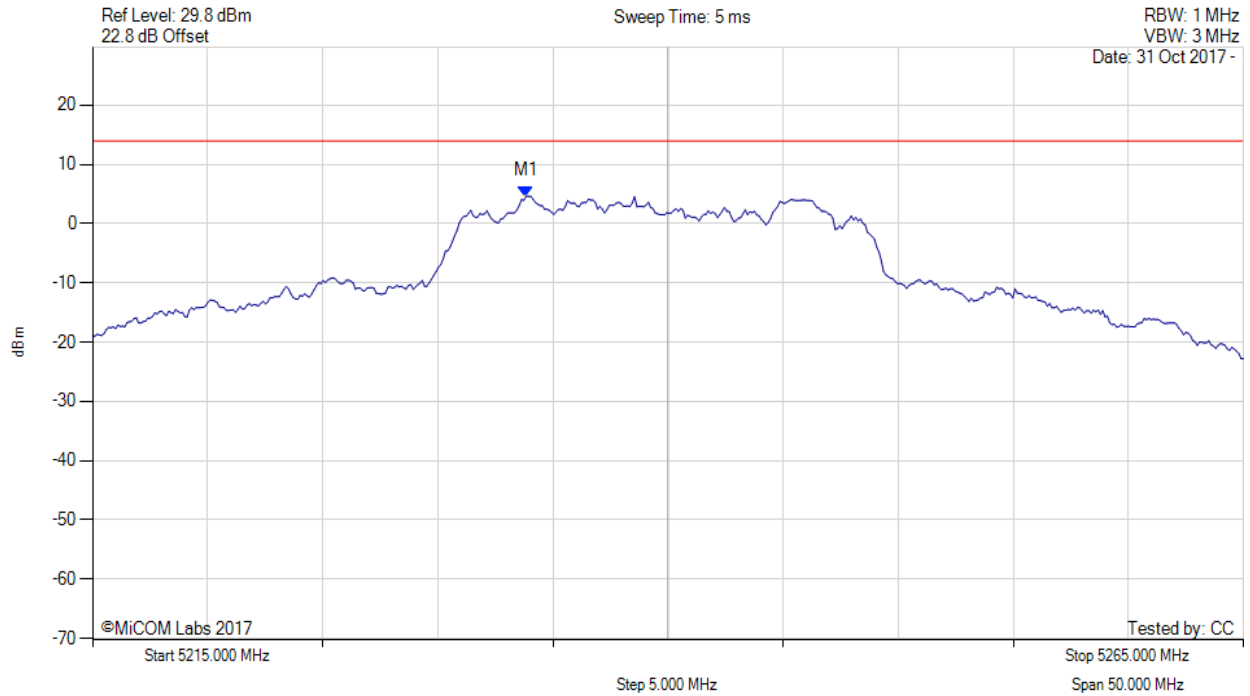

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5233.838 MHz : 4.636 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 139 of 198

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

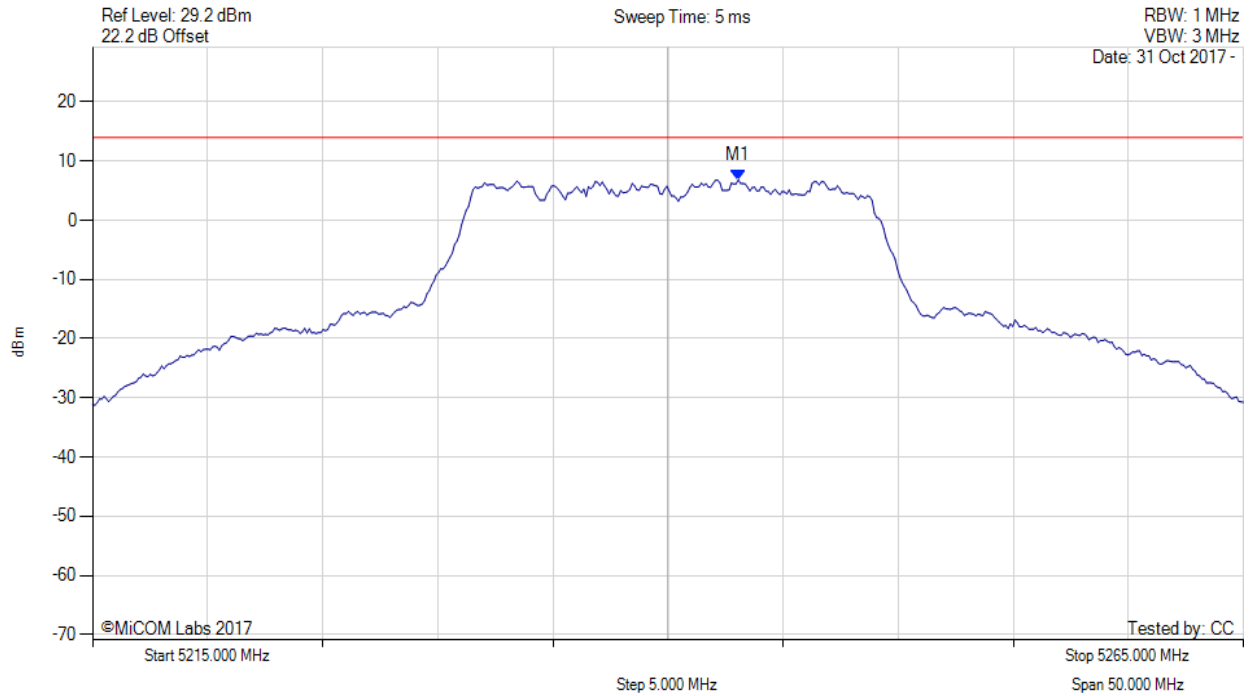

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|-------------------------------|---------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5243.056 MHz : 6.803 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5240.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

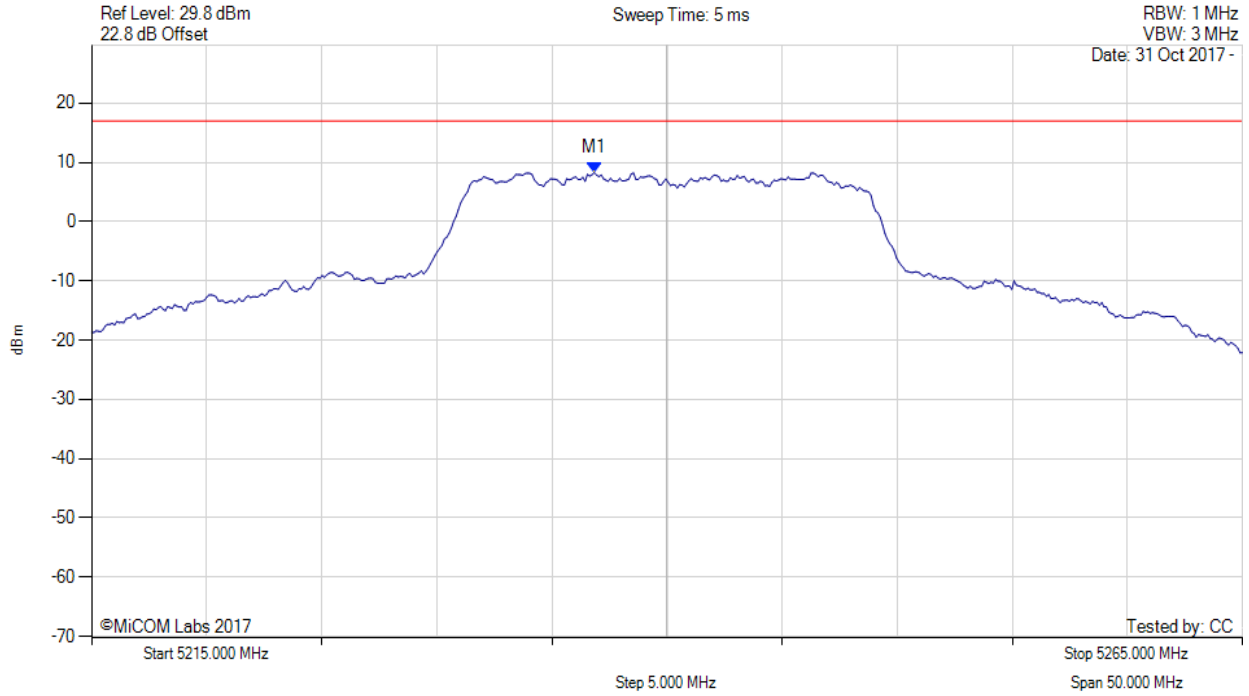

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|---|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5236.800 MHz : 8.308 dBm M1 + DCCF : 5236.800 MHz : 8.352 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 17.0 dBm Margin: -8.7 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 141 of 198

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

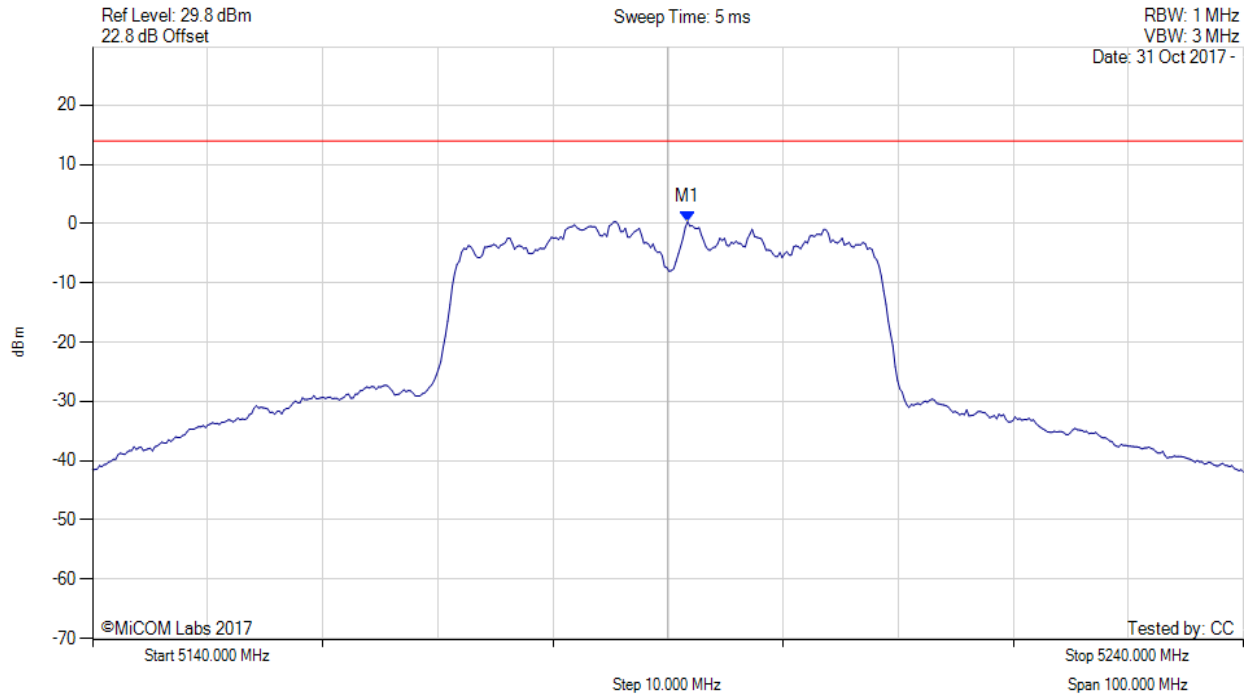

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5191.703 MHz : 0.344 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 142 of 198



POWER SPECTRAL DENSITY

Variants: 802.11n HT-40, Channel: 5190.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

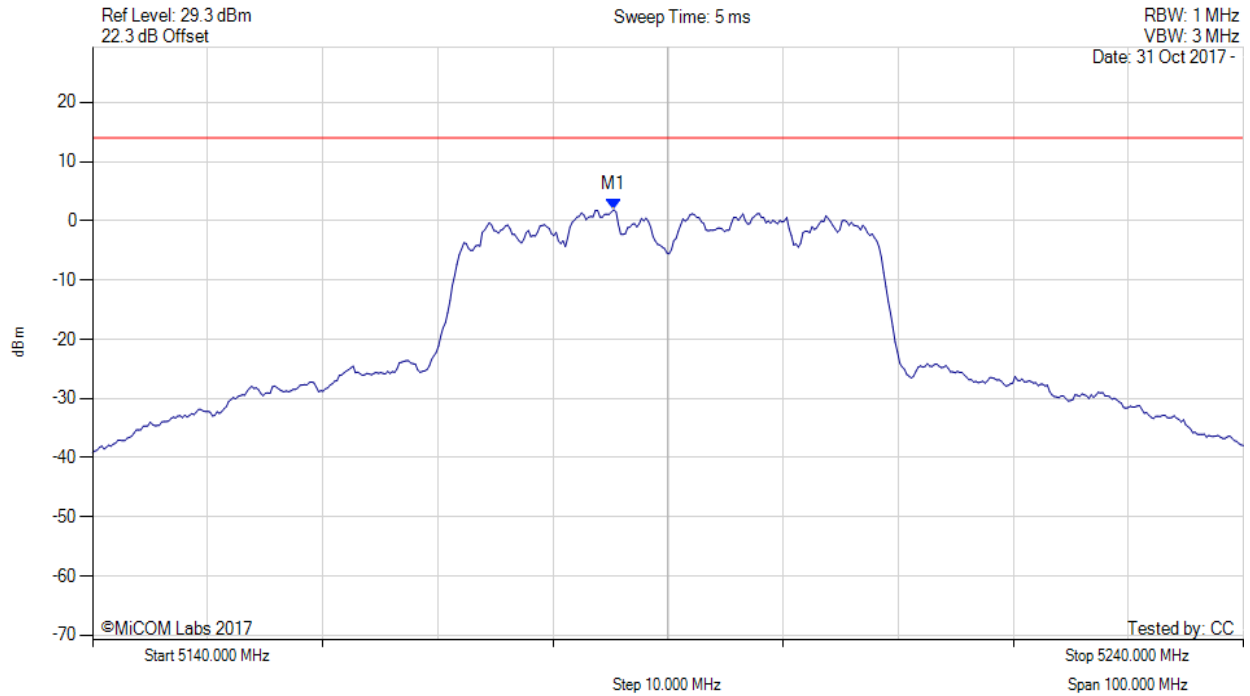

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5185.291 MHz : 1.868 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 143 of 198

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5190.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

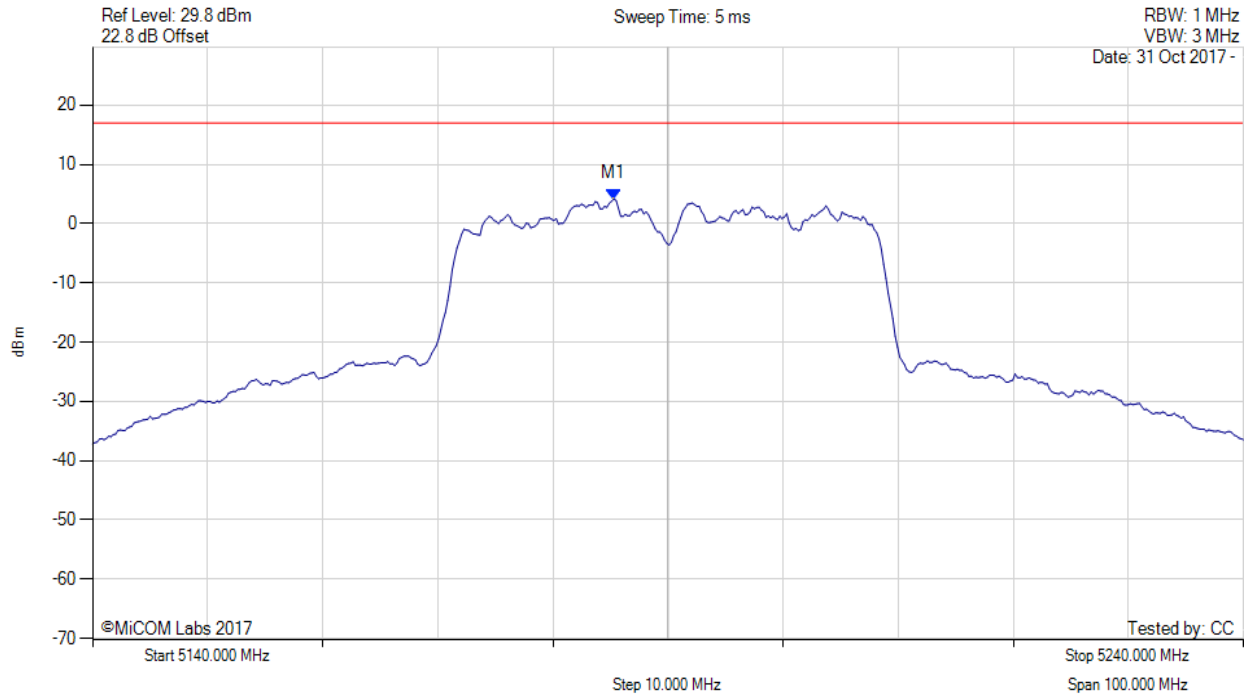

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|--|--|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5185.300 MHz : 4.171 dBm M1 + DCCF : 5185.300 MHz : 4.215 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 17.0 dBm Margin: -12.8 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 144 of 198

POWER SPECTRAL DENSITY



Variants: 802.11n HT-40, Channel: 5230.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

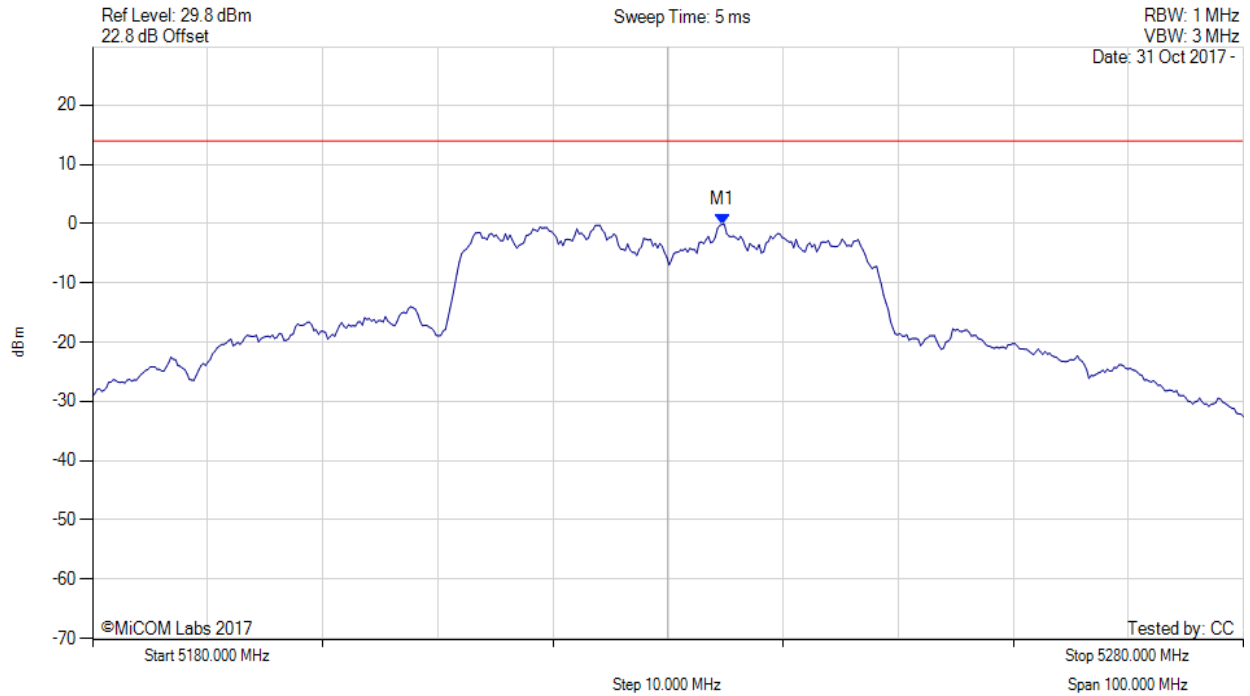

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5234.709 MHz : -0.078 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 145 of 198



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

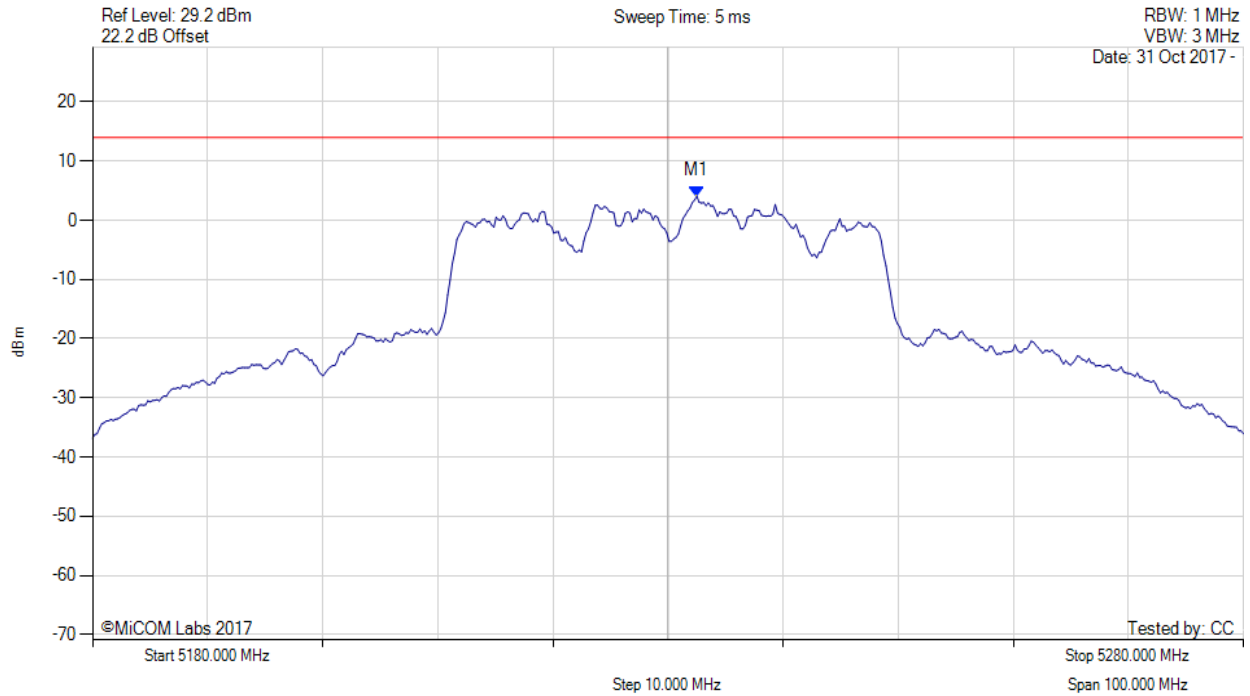

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|---------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5232.505 MHz : 4.046 dBm | Limit: ≤ 13.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 146 of 198

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5230.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

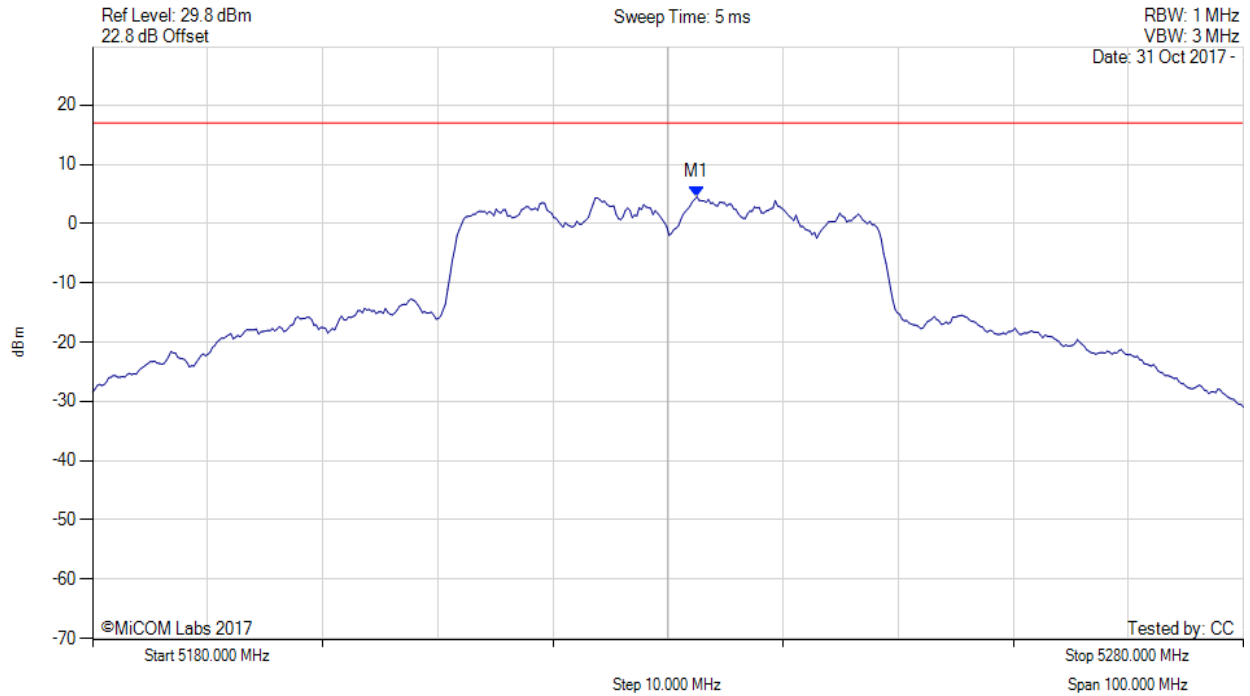

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5232.500 MHz : 4.562 dBm M1 + DCCF : 5232.500 MHz : 4.606 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 17.0 dBm Margin: -12.4 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 147 of 198

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

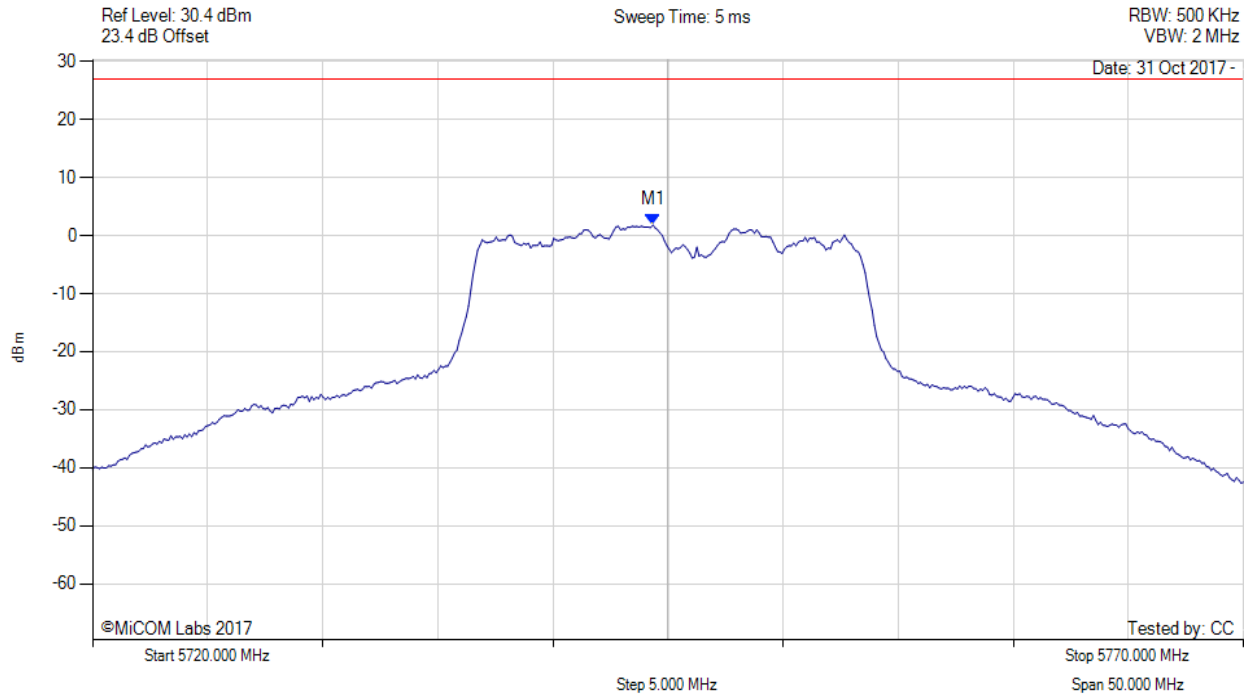

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5744.349 MHz : 1.828 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 148 of 198

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

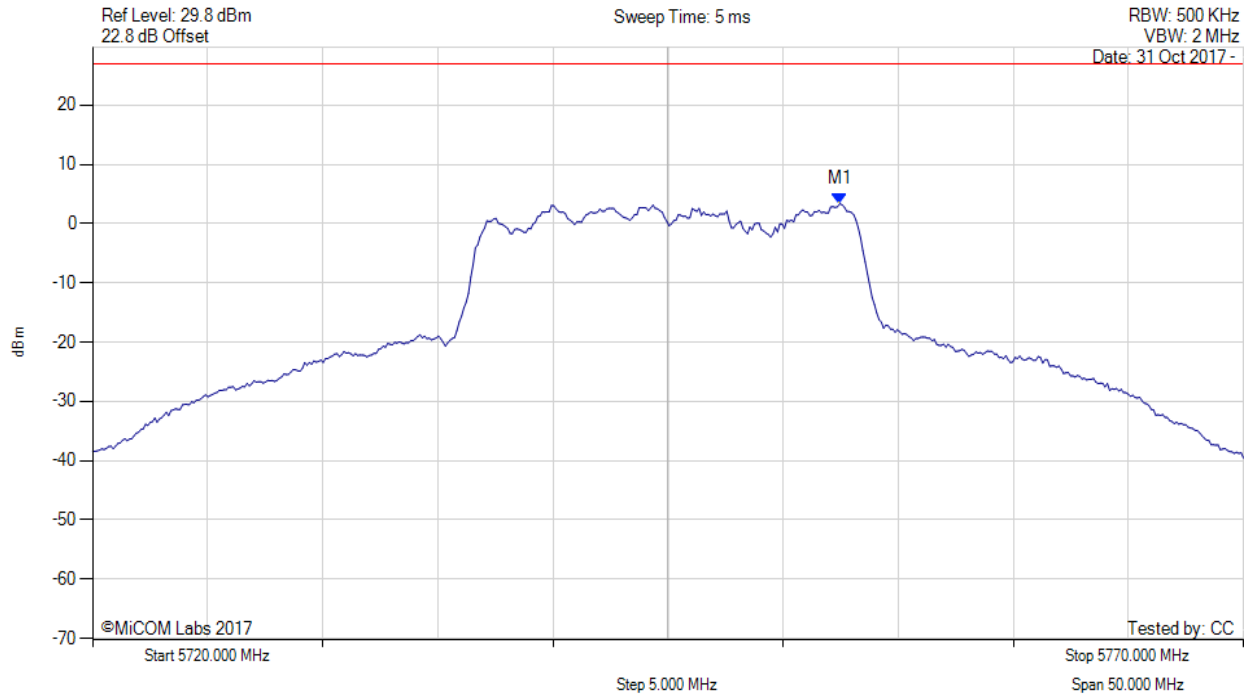

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|---------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5752.465 MHz : 3.379 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 149 of 198



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5745.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

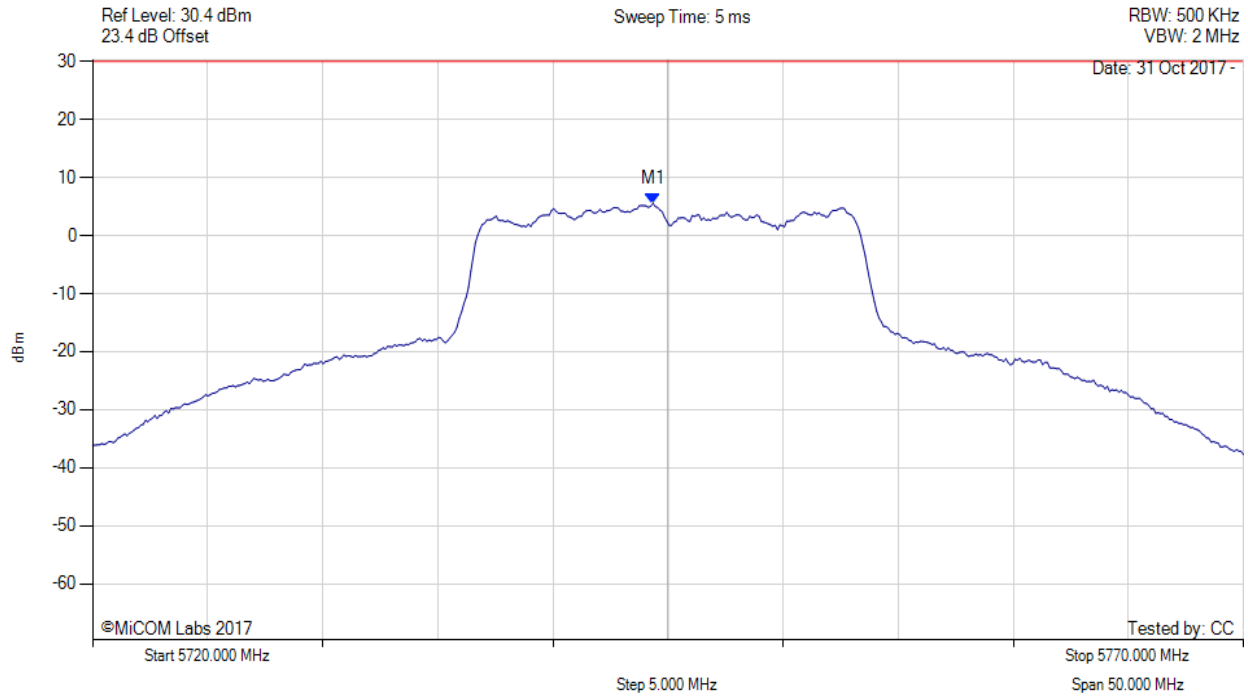

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|--|--|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5744.300 MHz : 5.551 dBm M1 + DCCF : 5744.300 MHz : 5.595 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 30.0 dBm Margin: -24.4 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 150 of 198

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

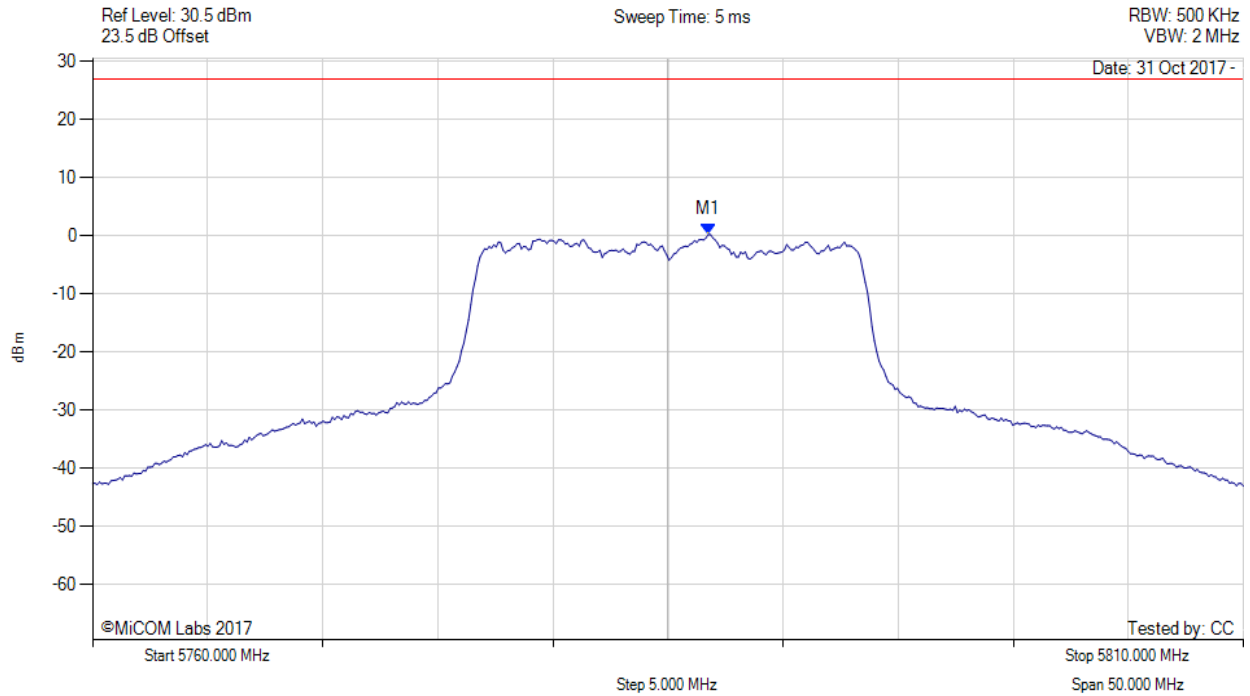

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5786.754 MHz : 0.226 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 151 of 198

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

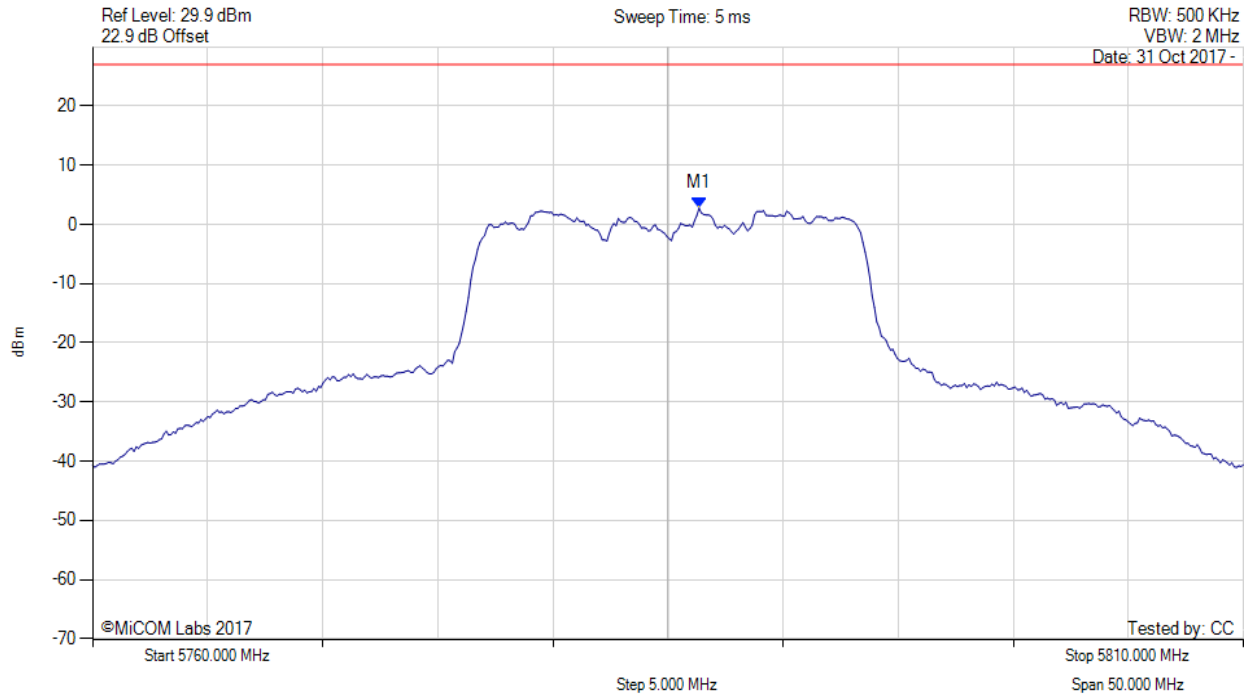

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5786.353 MHz : 2.756 dBm | Channel Frequency: 5785.00 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5785.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

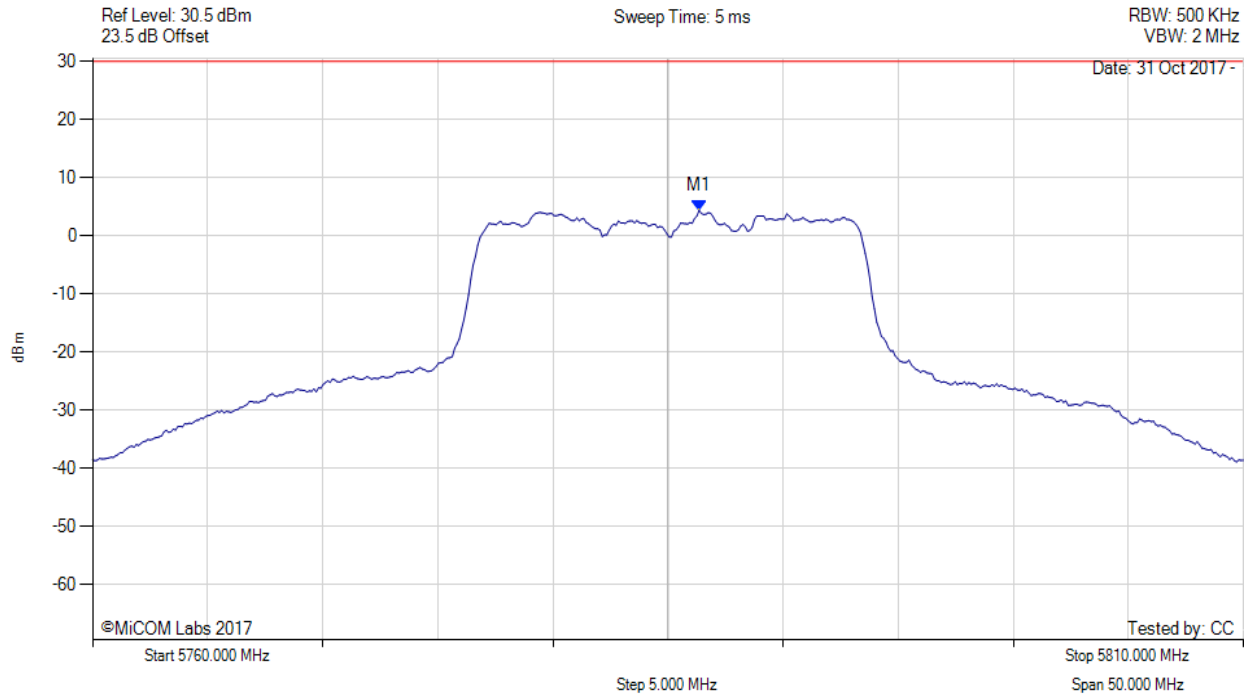

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|--|--|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5786.400 MHz : 4.373 dBm M1 + DCCF : 5786.400 MHz : 4.417 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 30.0 dBm Margin: -25.6 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 153 of 198

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

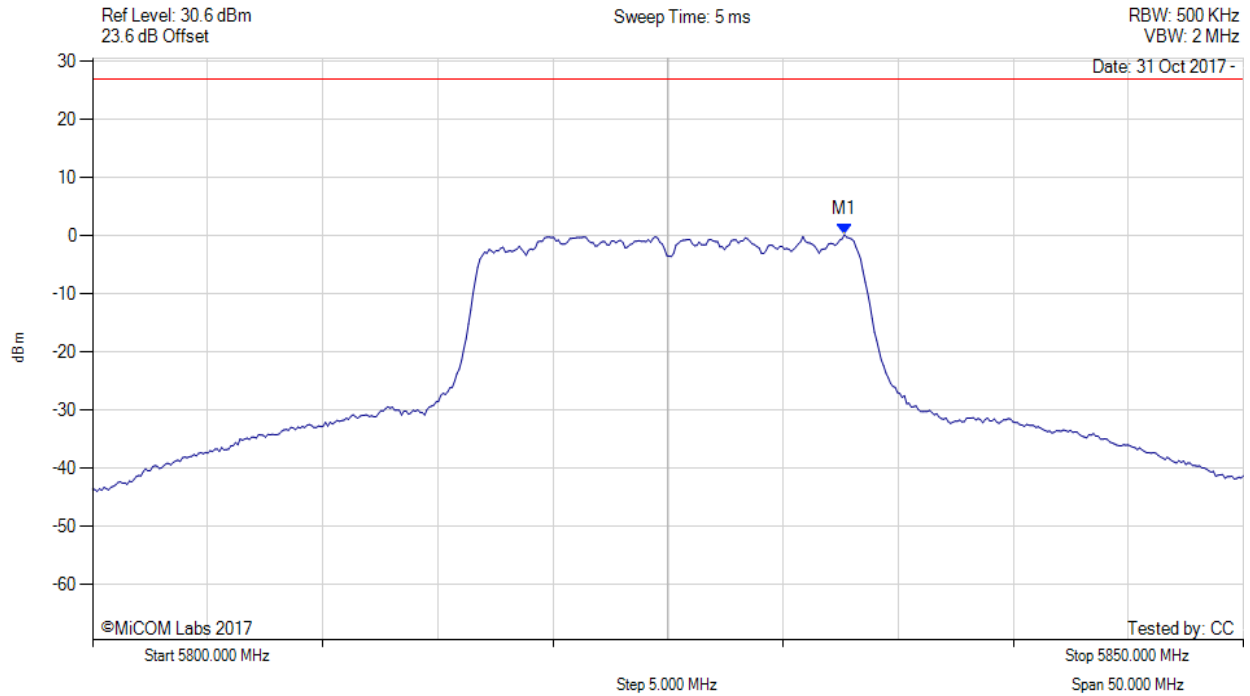

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5832.665 MHz : 0.223 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 154 of 198

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

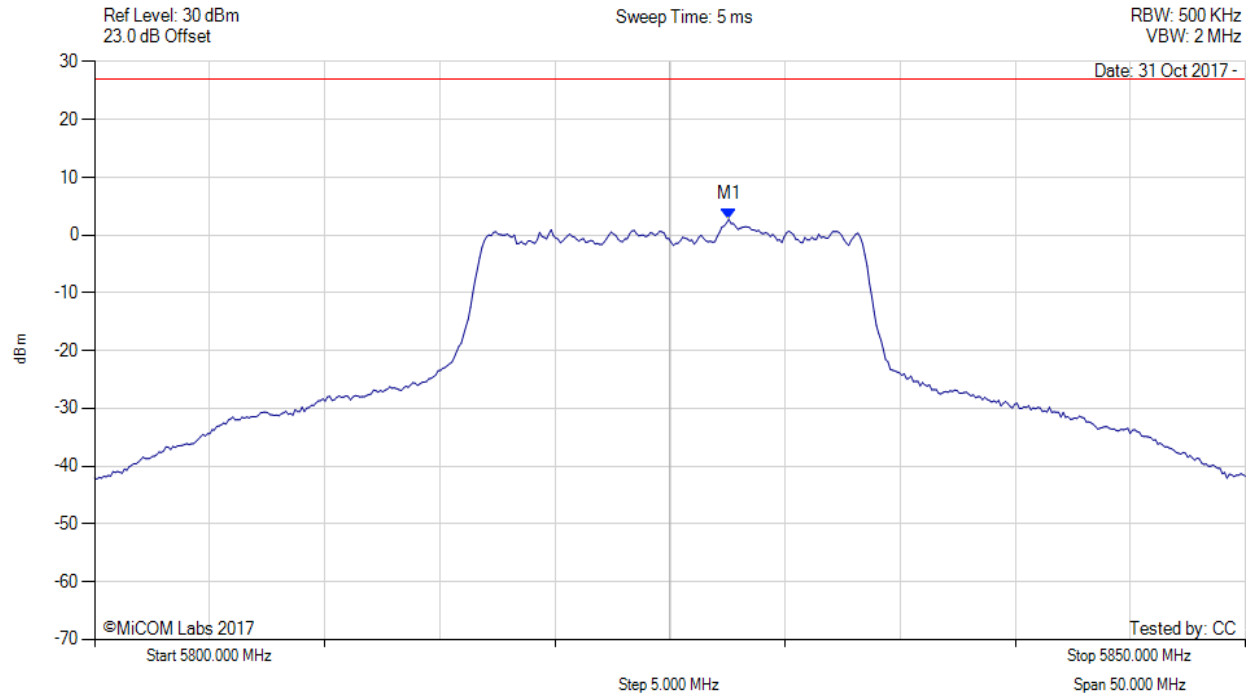

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5827.555 MHz : 2.729 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 155 of 198

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5825.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

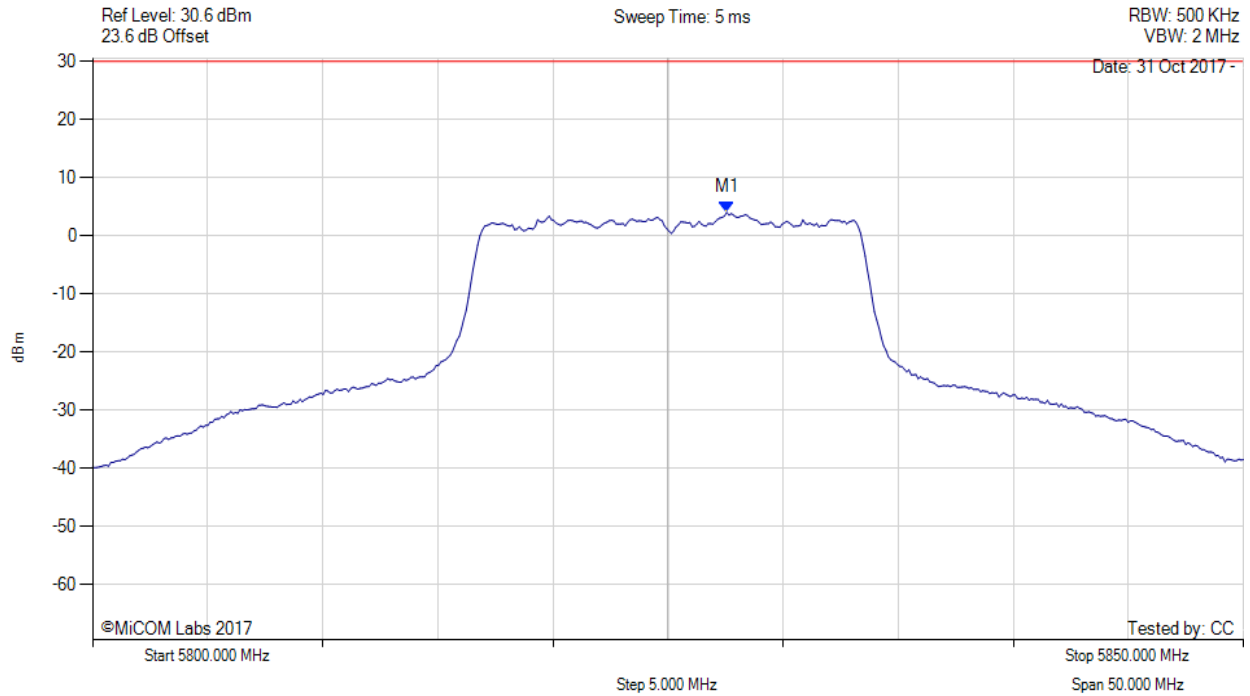

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|--|--|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5827.600 MHz : 4.036 dBm M1 + DCCF : 5827.600 MHz : 4.080 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 30.0 dBm Margin: -25.9 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 156 of 198

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

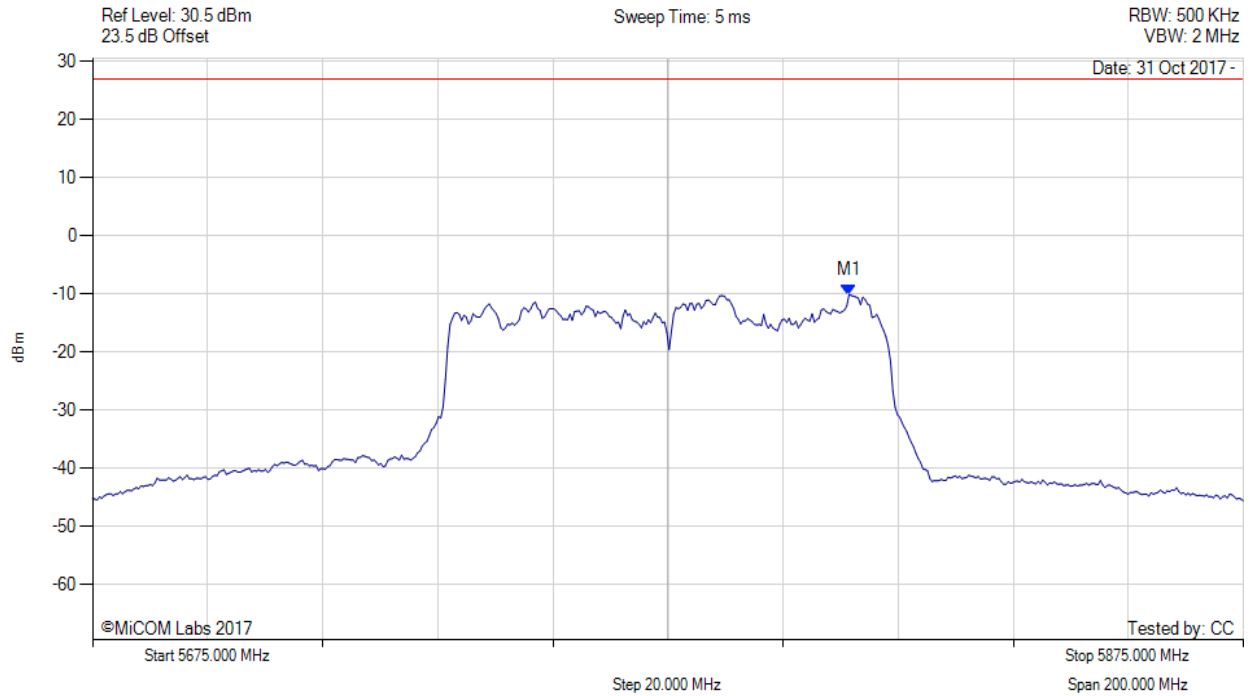

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|---------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5806.463 MHz : -10.146 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 157 of 198

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

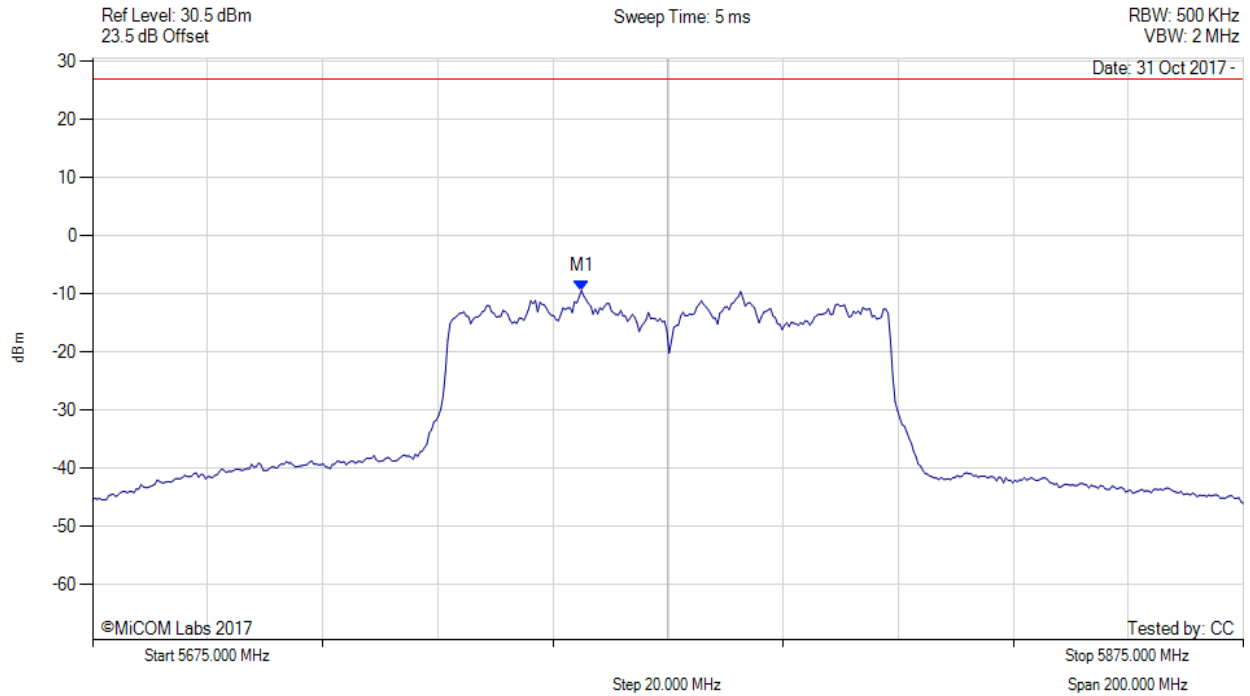

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--------------------------------|--------------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5759.970 MHz : -9.436 dBm | Channel Frequency: 5775.00 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 158 of 198

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

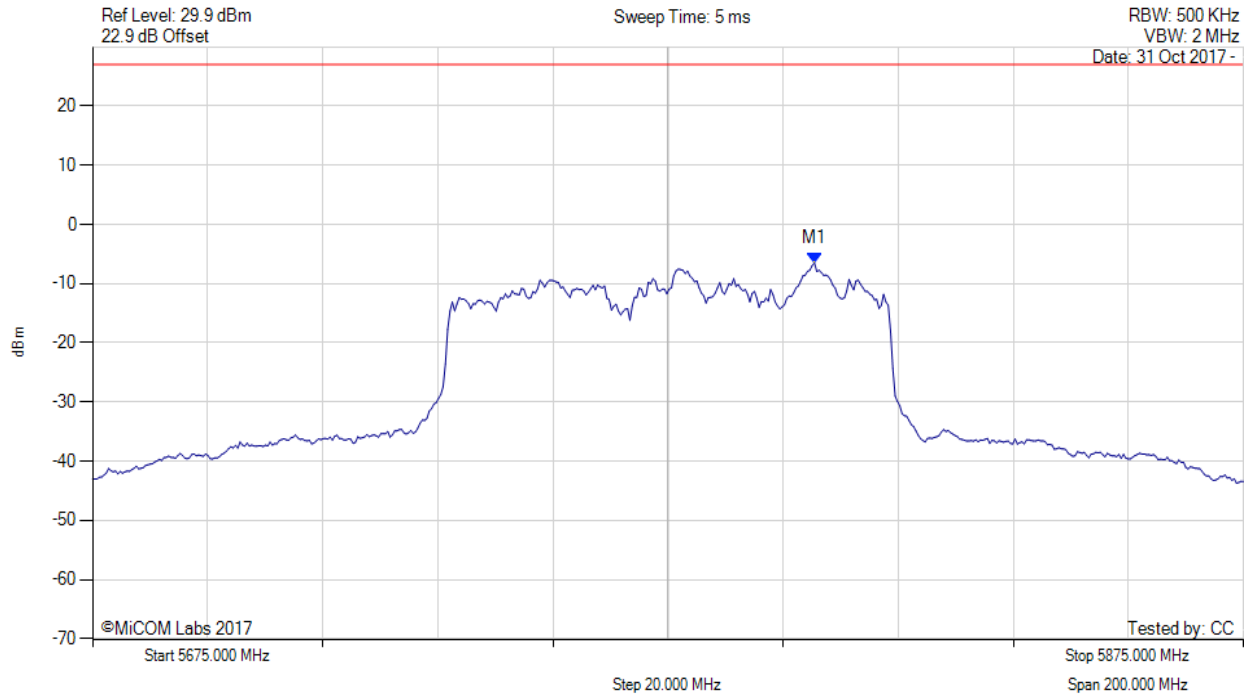

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|--------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5800.451 MHz : -6.505 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

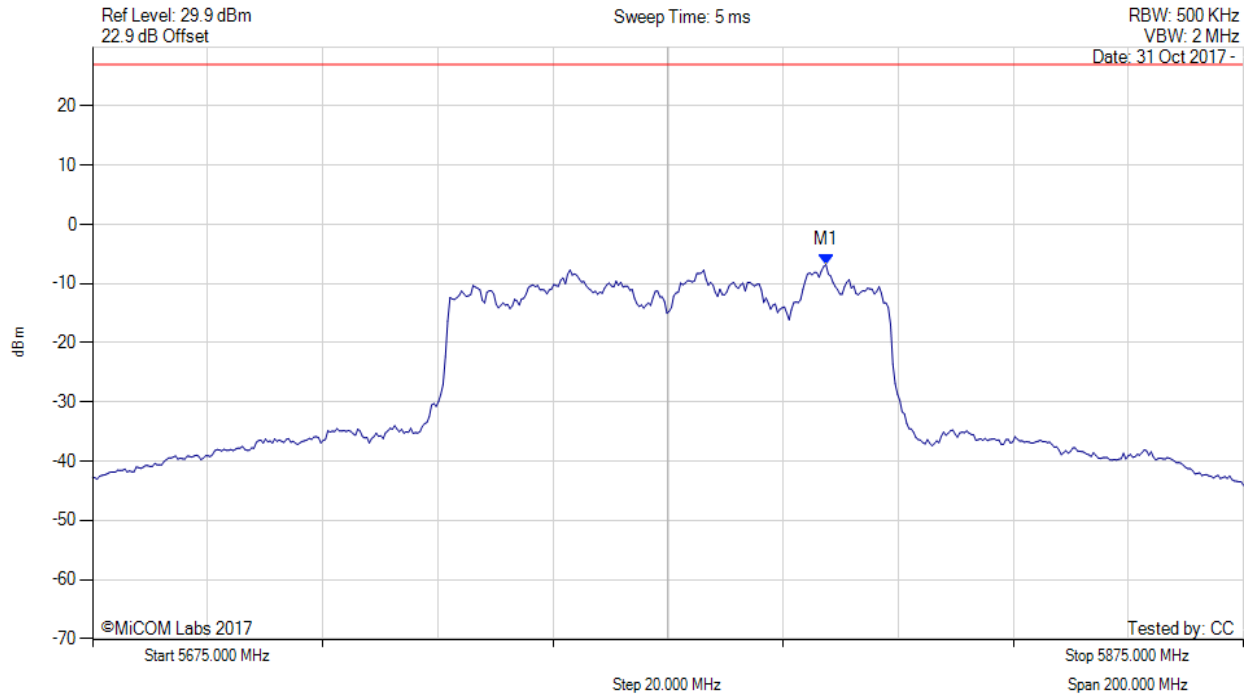

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|--------------------------------|--------------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5802.455 MHz : -6.791 dBm | Channel Frequency: 5775.00 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

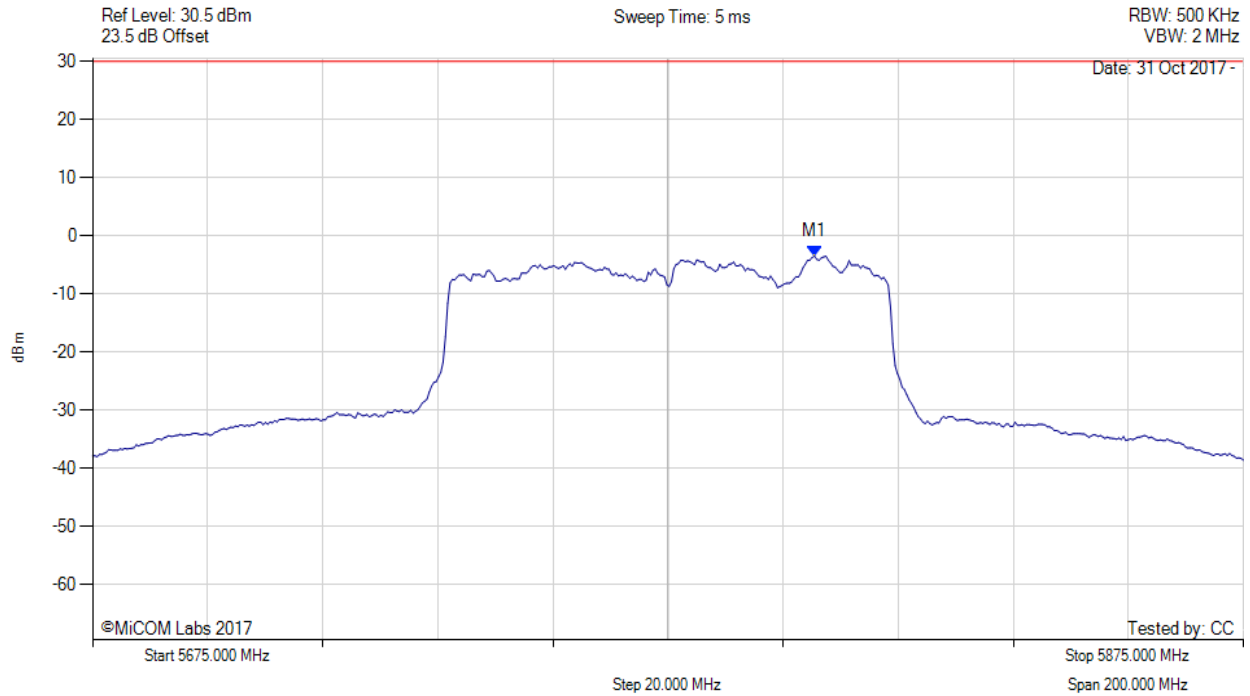

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|--|--|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5800.500 MHz : -3.472 dBm M1 + DCCF : 5800.500 MHz : -3.428 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 30.0 dBm Margin: -33.4 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 161 of 198

POWER SPECTRAL DENSITY



Variants: 802.11n HT-20, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

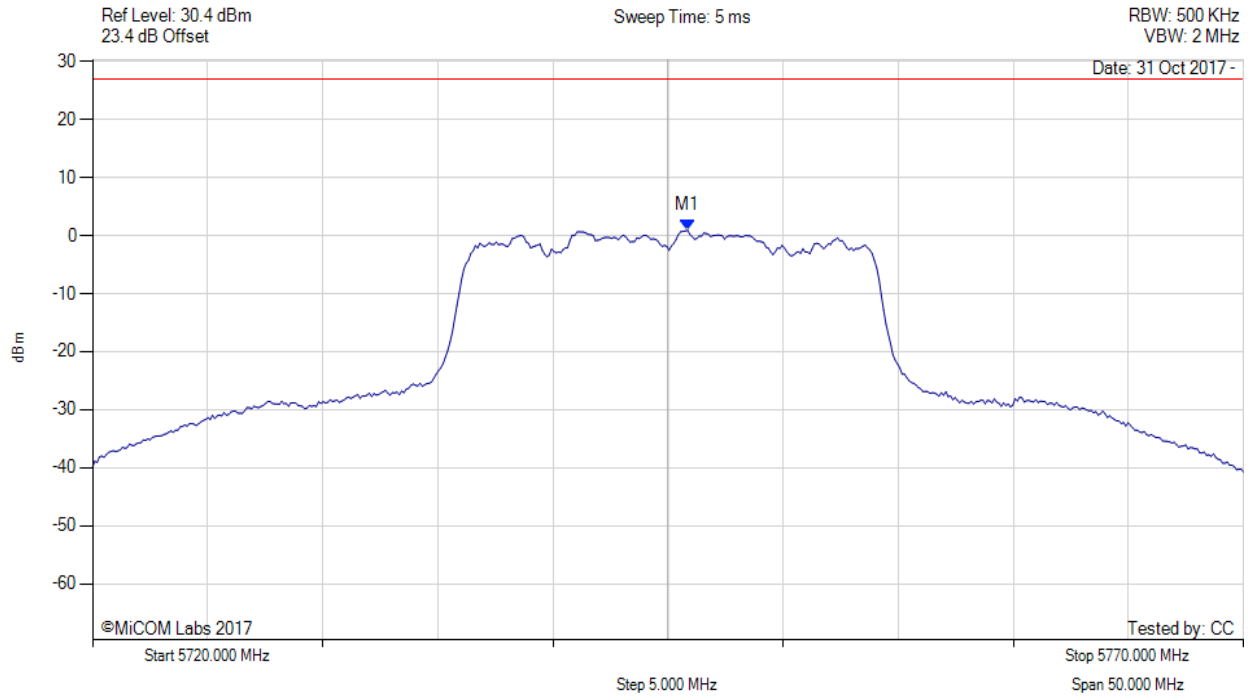

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5745.852 MHz : 0.926 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 162 of 198



POWER SPECTRAL DENSITY

Variants: 802.11n HT-20, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

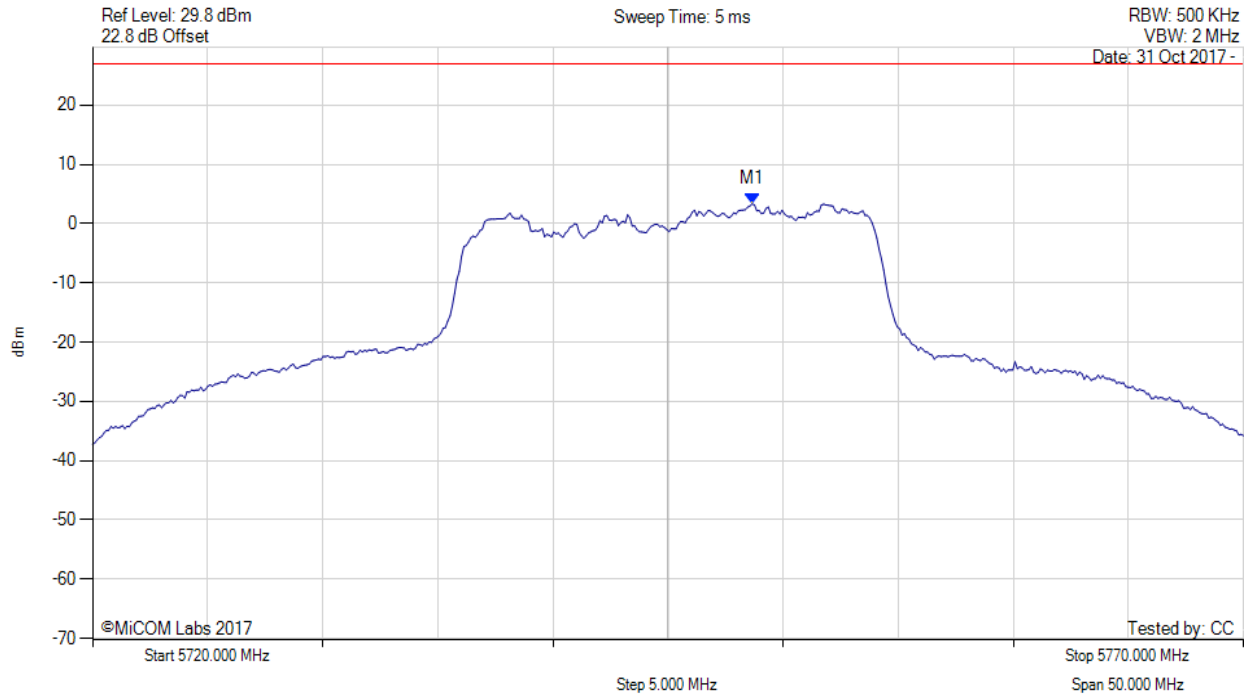

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5748.657 MHz : 3.349 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 163 of 198

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5745.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

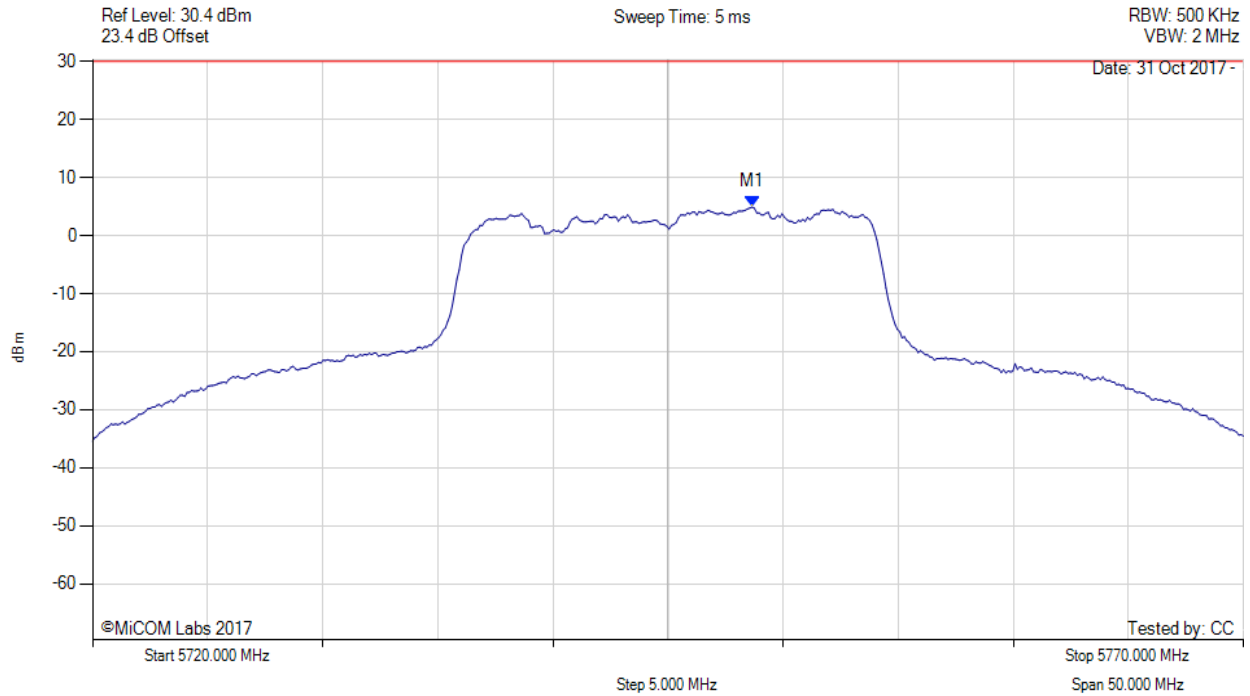

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5748.700 MHz : 4.930 dBm M1 + DCCF : 5748.700 MHz : 4.974 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 30.0 dBm Margin: -25.0 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 164 of 198

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

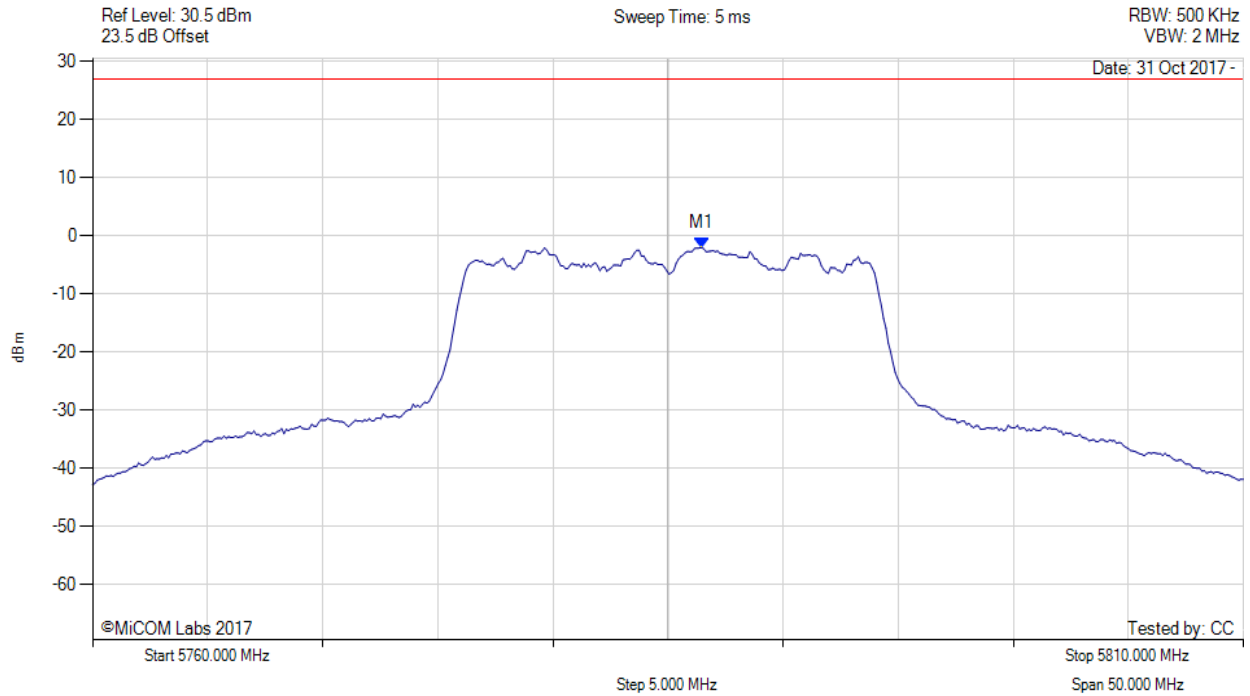

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--------------------------------|---------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5786.453 MHz : -2.056 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 165 of 198

POWER SPECTRAL DENSITY



Variants: 802.11n HT-20, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

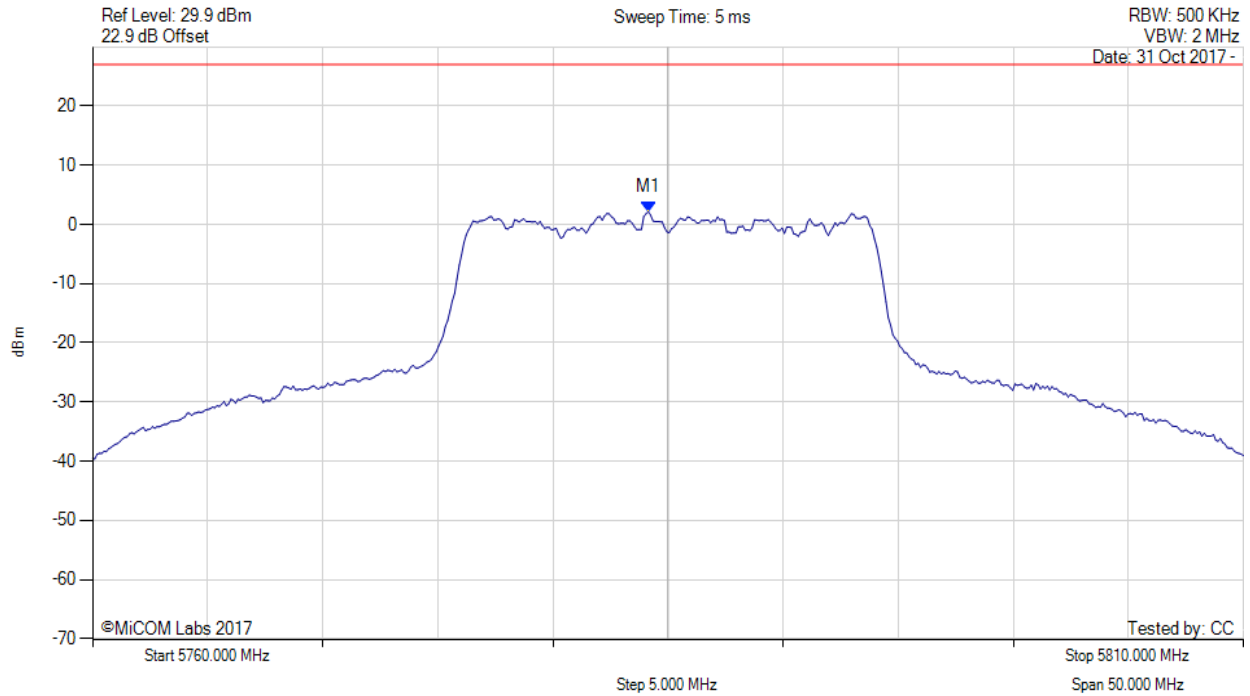

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|-------------------------------|--------------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5784.148 MHz : 2.145 dBm | Channel Frequency: 5785.00 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 166 of 198



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5785.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

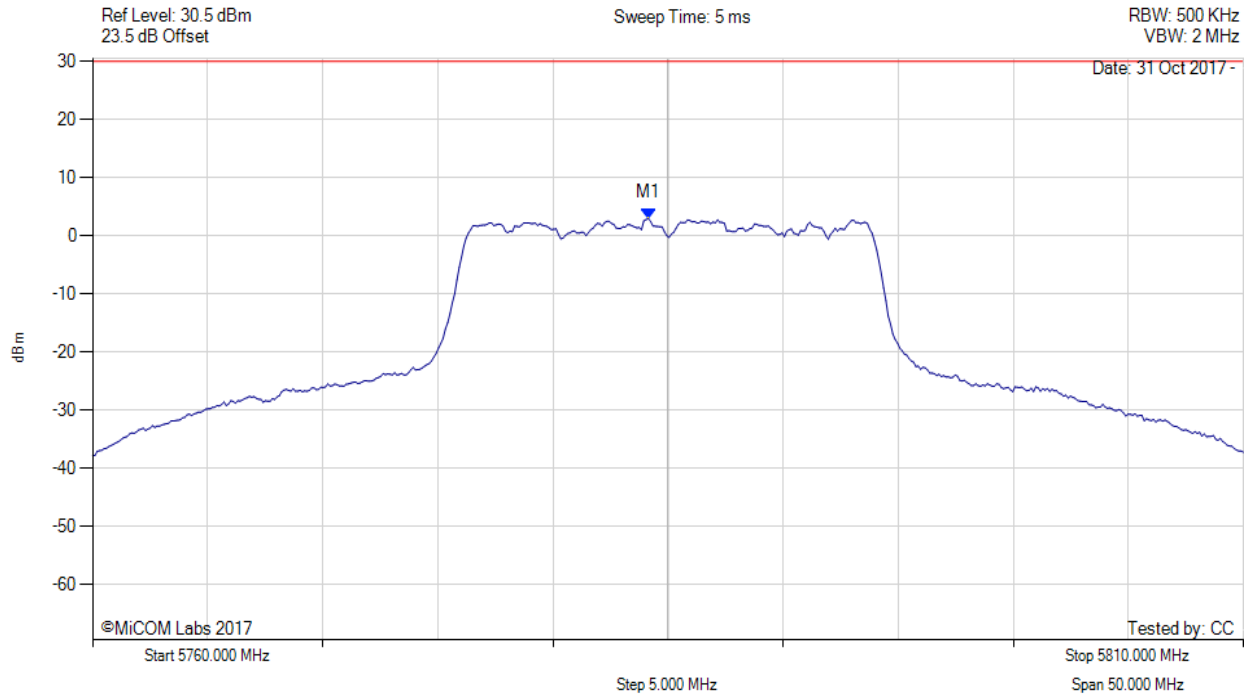

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5784.100 MHz : 2.975 dBm M1 + DCCF : 5784.100 MHz : 3.019 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 30.0 dBm Margin: -27.0 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 167 of 198

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

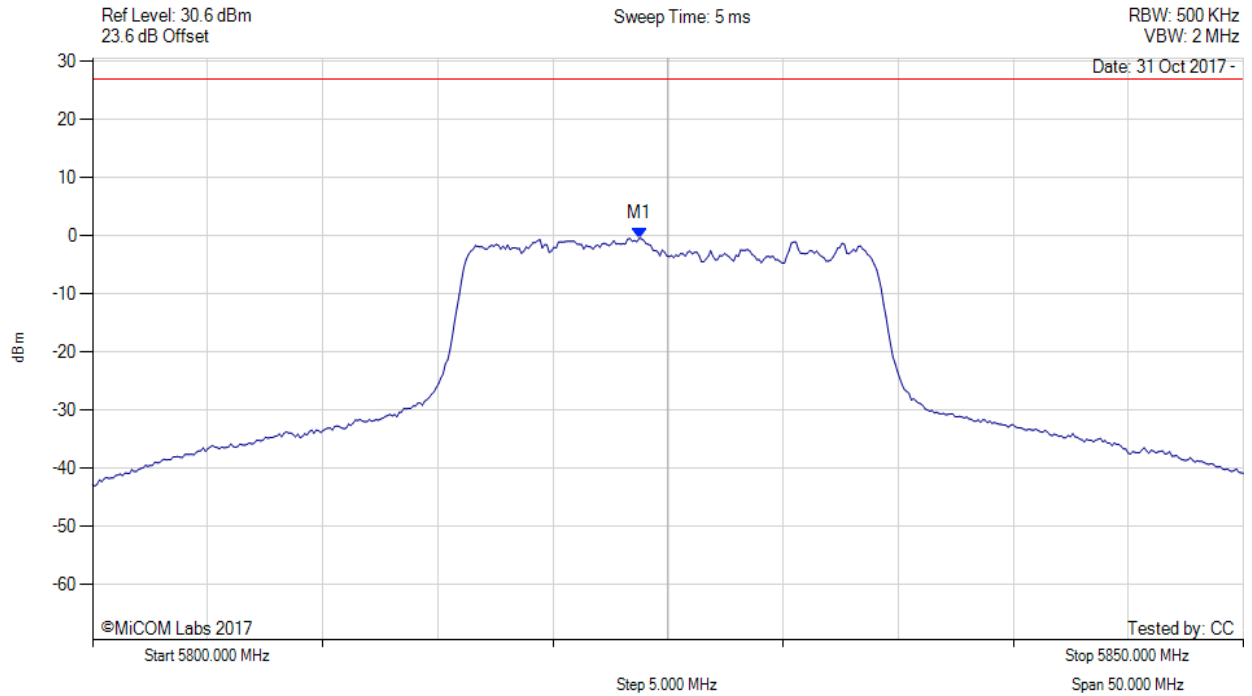

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--------------------------------|---------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5823.747 MHz : -0.440 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 168 of 198

POWER SPECTRAL DENSITY



Variants: 802.11n HT-20, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

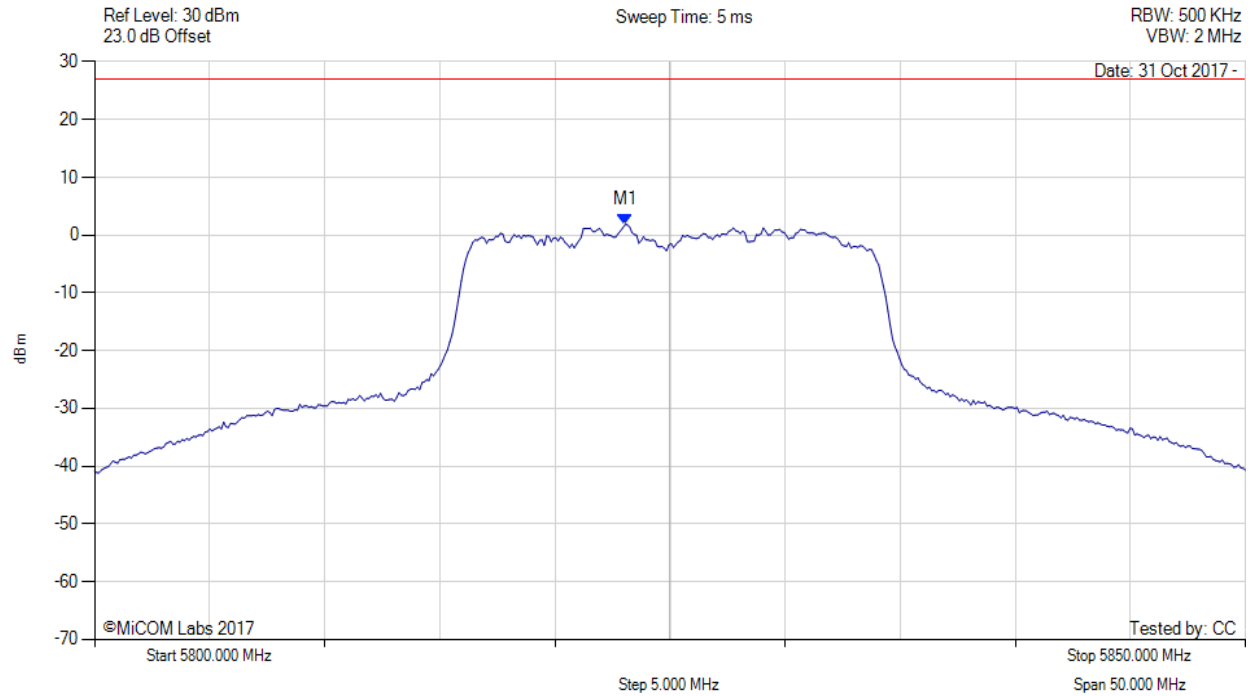

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|-------------------------------|---------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5823.046 MHz : 1.798 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 169 of 198

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5825.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

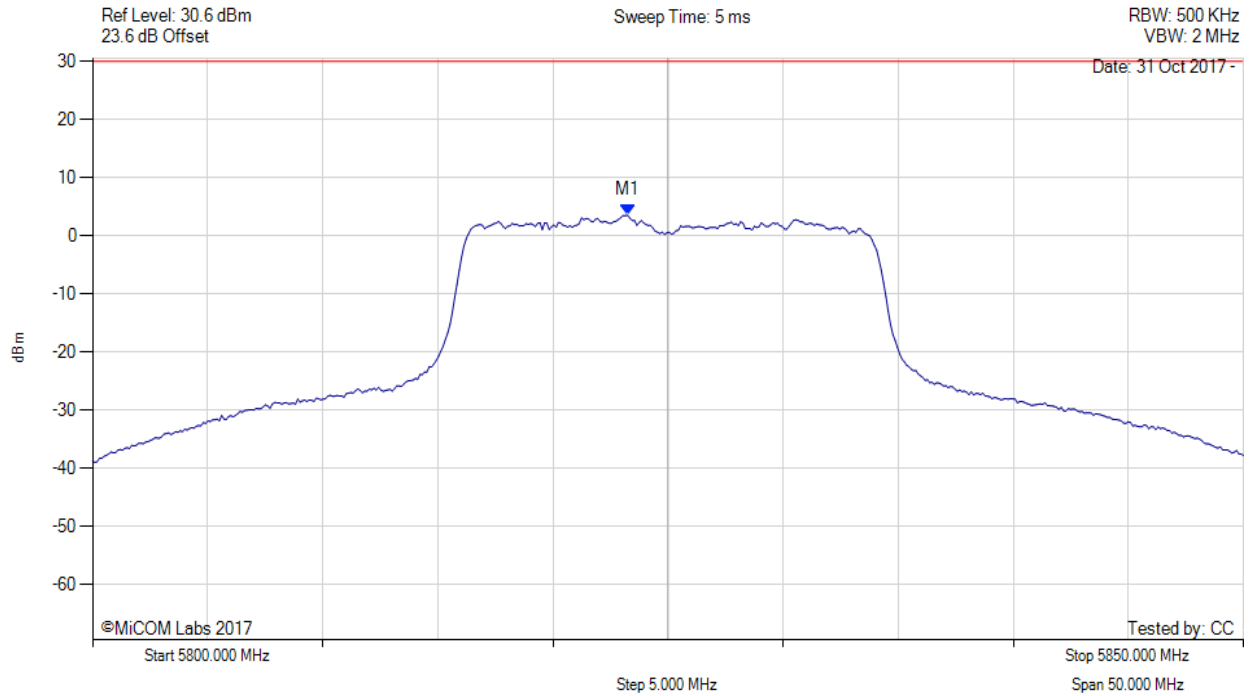

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5823.200 MHz : 3.553 dBm M1 + DCCF : 5823.200 MHz : 3.597 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 30.0 dBm Margin: -26.4 dB |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

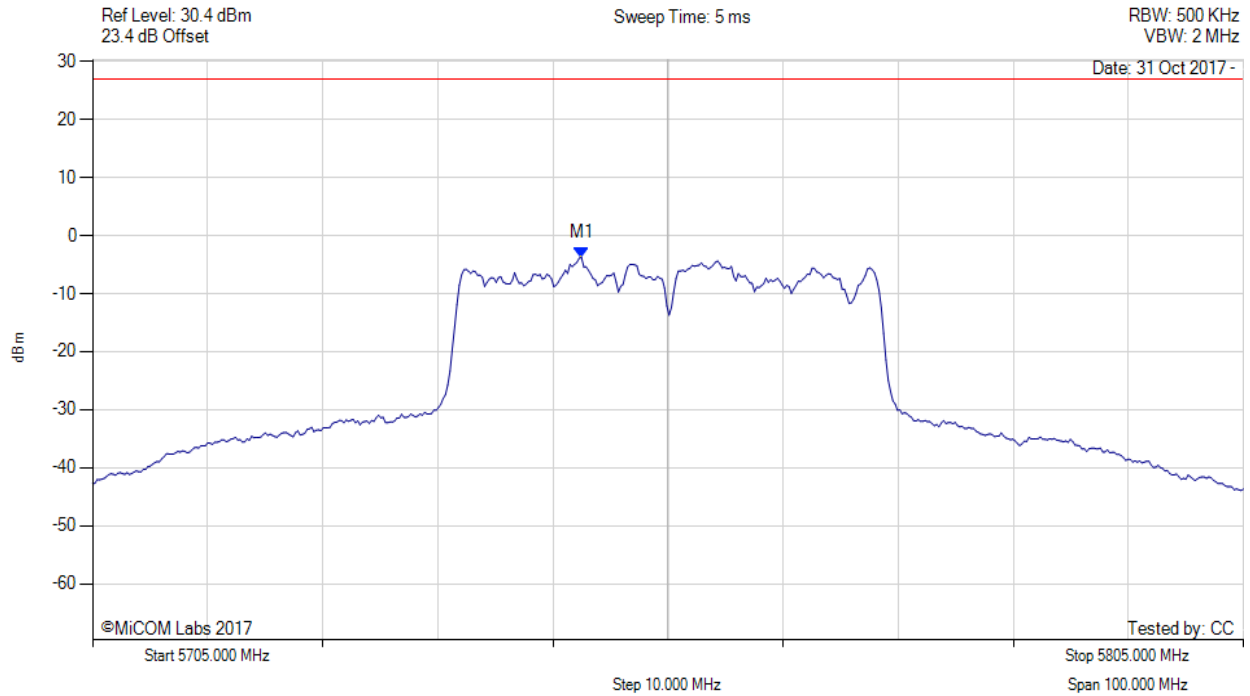

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--------------------------------|---------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5747.485 MHz : -3.763 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 171 of 198



POWER SPECTRAL DENSITY

Variants: 802.11n HT-40, Channel: 5755.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

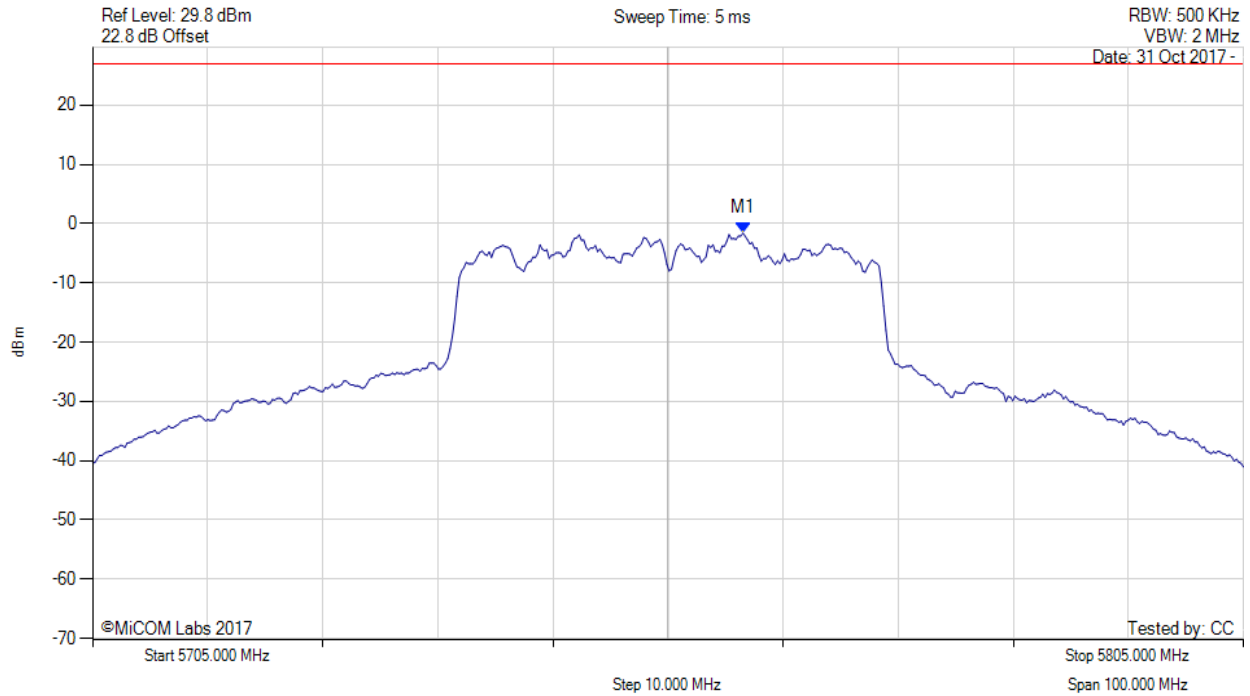

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|--------------------------------|---------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5761.513 MHz : -1.577 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 172 of 198



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5755.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

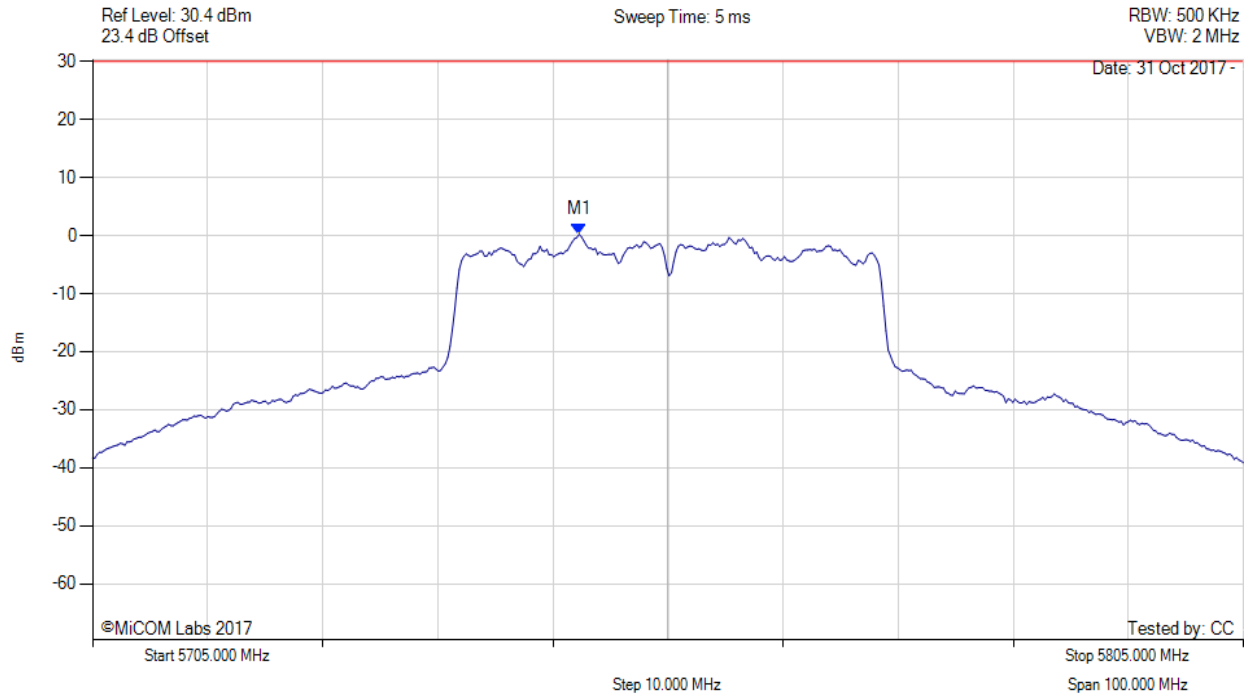

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|--|--|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5747.300 MHz : 0.240 dBm M1 + DCCF : 5747.300 MHz : 0.284 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 30.0 dBm Margin: -29.7 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 173 of 198

POWER SPECTRAL DENSITY



Variants: 802.11n HT-40, Channel: 5795.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

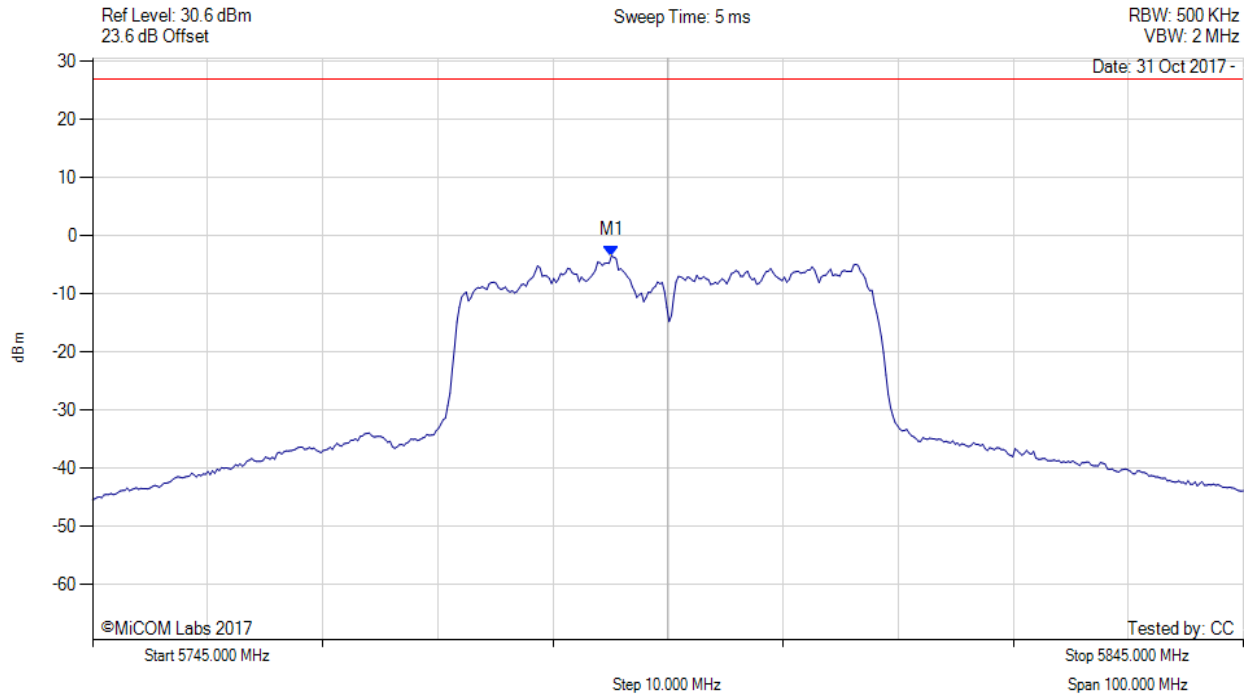

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|--|--------------------------------|---------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5790.090 MHz : -3.410 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 174 of 198



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

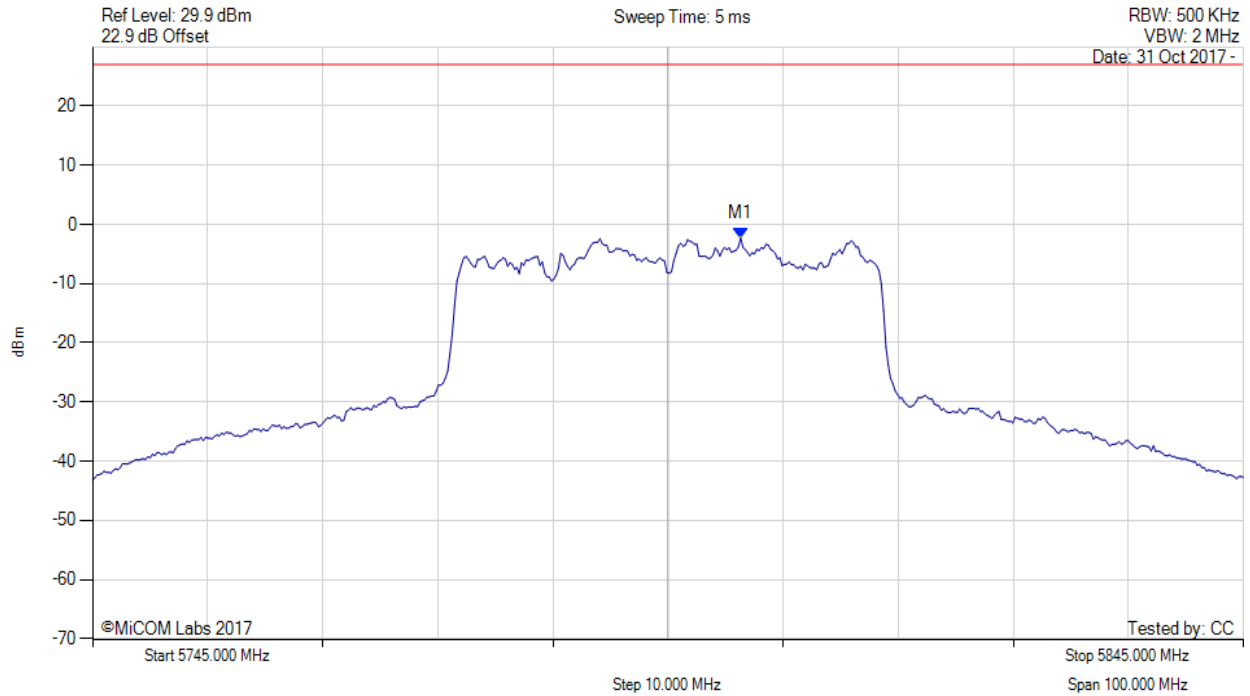

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--------------------------------|--------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5801.313 MHz : -2.297 dBm | Limit: ≤ 26.990 dBm |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 175 of 198



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5795.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

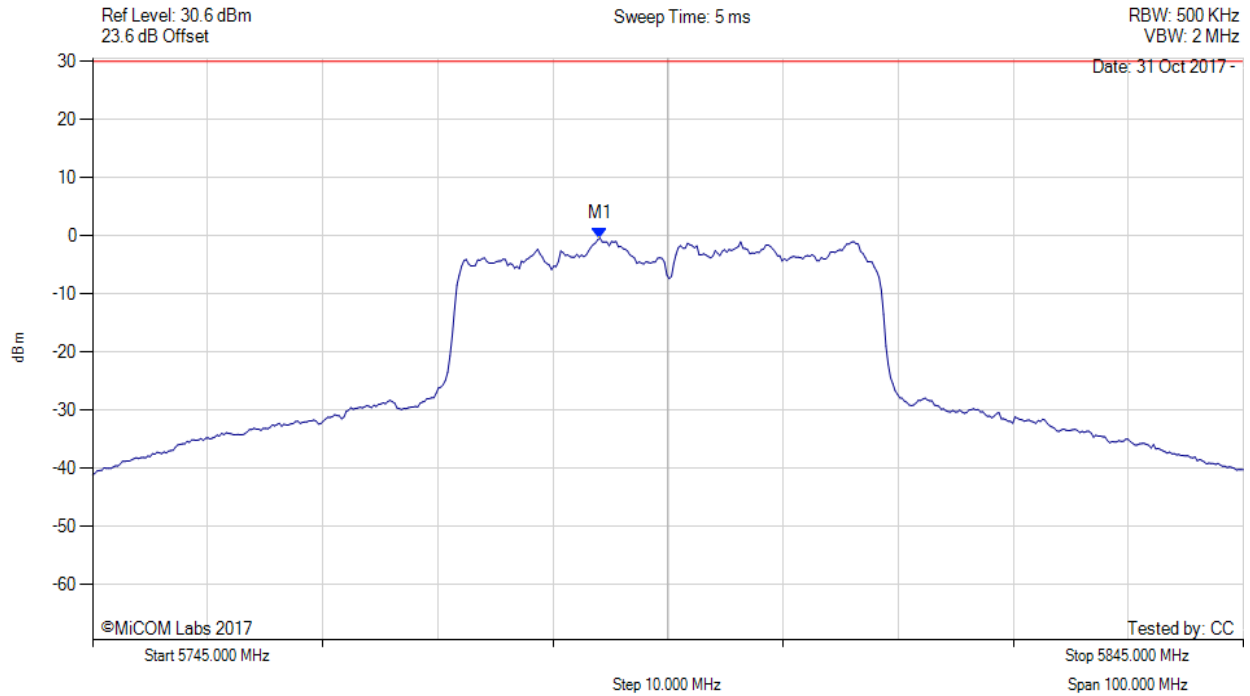

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS | M1 : 5789.100 MHz : -0.380 dBm M1 + DCCF : 5789.100 MHz : -0.336 dBm Duty Cycle Correction Factor : +0.04 dB | Limit: ≤ 30.0 dBm Margin: -30.3 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




A.4. Radiated

A.4.1. TX Spurious & Restricted Band Emissions



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5180.00 MHz, Power Setting: 20, Duty Cycle (%): 99

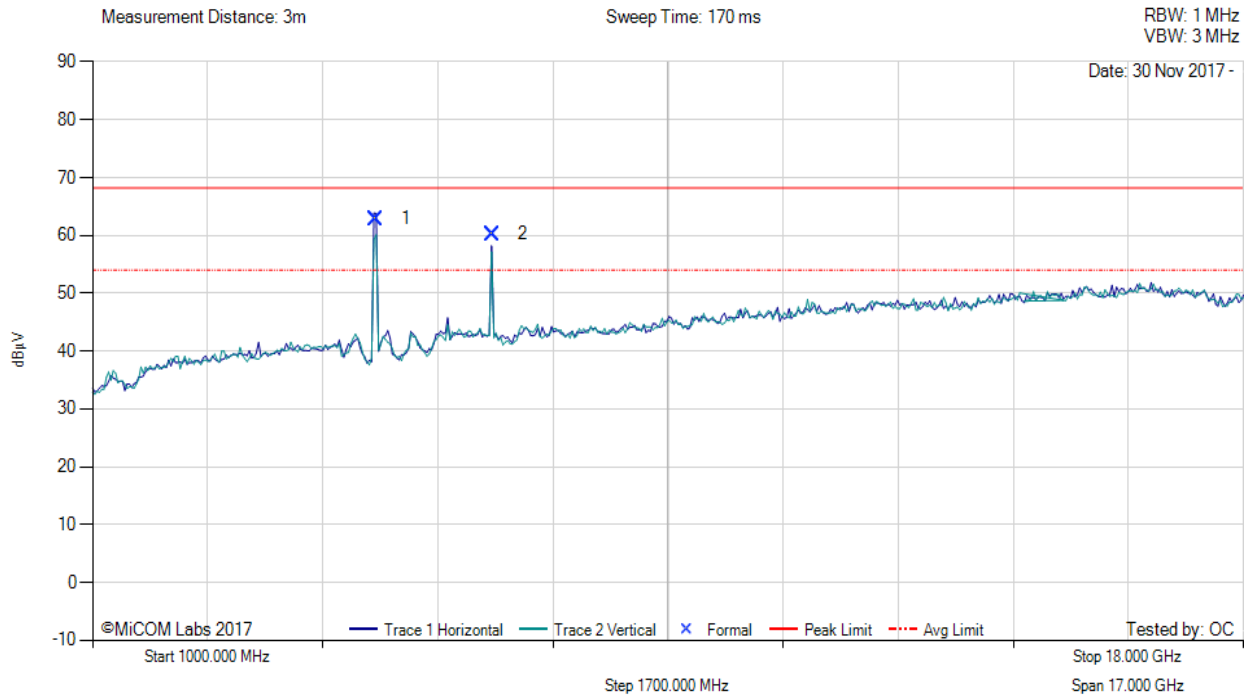

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5183.81 | 71.76 | 3.13 | -12.02 | 62.87 | Fundamental | Horizontal | 100 | 0 | -- | -- | |
| 2 | 6906.74 | 65.05 | 3.19 | -8.05 | 60.19 | Max Peak (NRB) | Horizontal | 174 | 337 | 68.2 | -8.0 | Pass |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 177 of 198



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5200.00 MHz, Power Setting: 40, Duty Cycle (%): 99

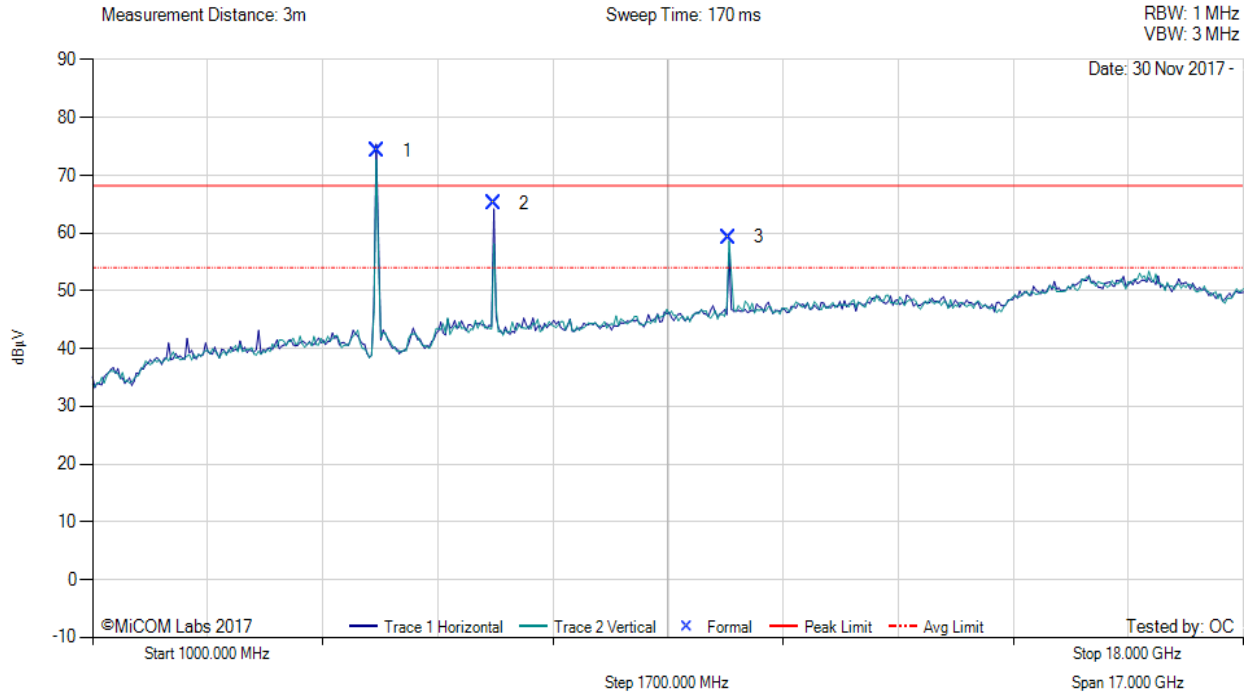

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5198.48 | 83.05 | 3.10 | -11.98 | 74.17 | Fundamental | Horizontal | 100 | 0 | -- | -- | |
| 2 | 6933.42 | 69.93 | 3.19 | -7.96 | 65.16 | Max Peak (NRB) | Horizontal | 190 | 40 | 68.2 | -3.1 | Pass |
| 3 | 10398.01 | 60.62 | 4.41 | -5.77 | 59.26 | Max Peak (NRB) | Horizontal | 175 | 219 | 68.2 | -9.0 | Pass |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 178 of 198



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5240.00 MHz, Power Setting: 40, Duty Cycle (%): 99

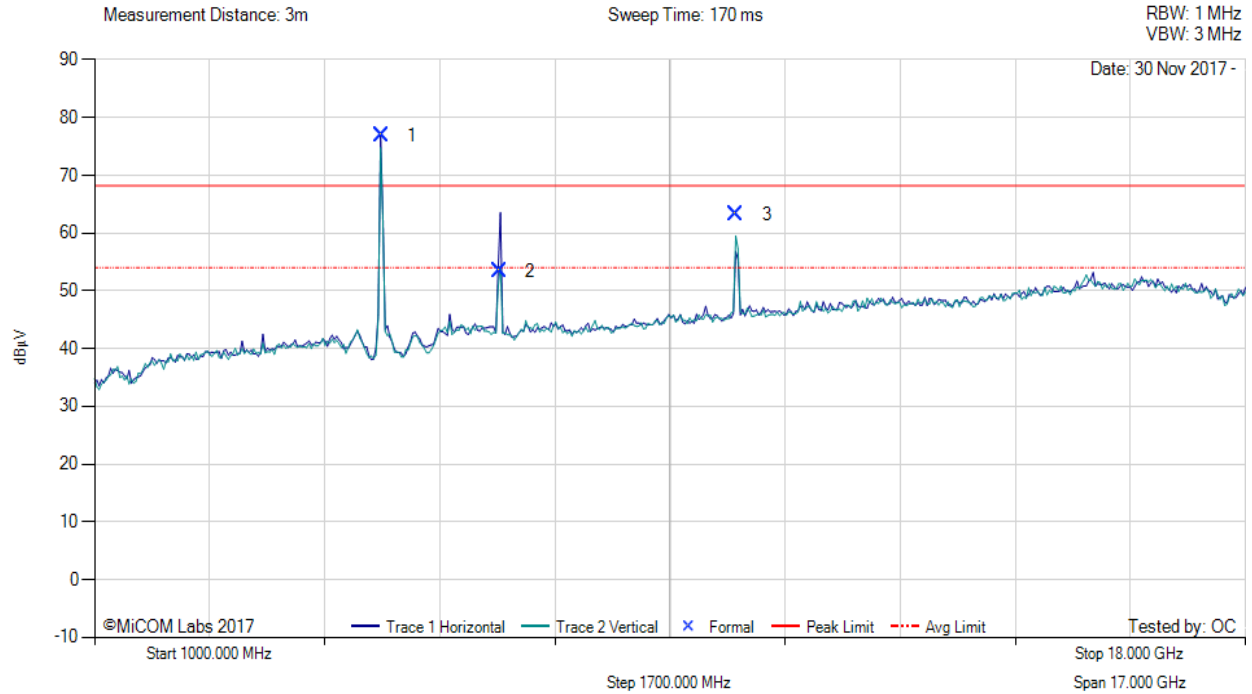

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5237.95 | 85.96 | 3.12 | -12.27 | 76.81 | Fundamental | Horizontal | 100 | 0 | -- | -- | |
| 2 | 6988.99 | 57.86 | 3.26 | -7.69 | 53.43 | Max Peak (NRB) | Horizontal | 98 | 48 | 68.2 | -14.8 | Pass |
| 3 | 10477.83 | 64.97 | 4.49 | -6.28 | 63.18 | Max Peak (NRB) | Horizontal | 178 | 221 | 68.2 | -5.1 | Pass |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 179 of 198



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5745.00 MHz, Power Setting: 40, Duty Cycle (%): 99

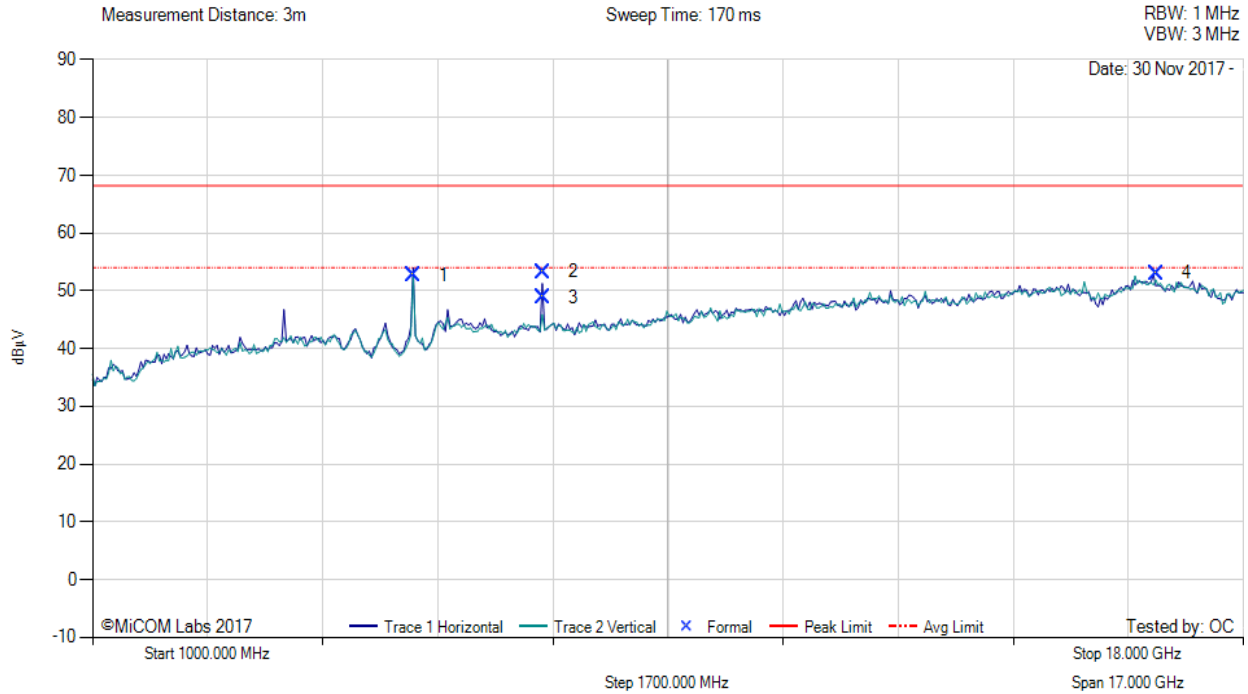

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5745.01 | 60.63 | 3.18 | -11.06 | 52.75 | Fundamental | Horizontal | 100 | 97 | -- | -- | |
| 2 | 7660.02 | 56.64 | 3.83 | -7.19 | 53.28 | Max Peak | Horizontal | 180 | 330 | 68.2 | -15.0 | Pass |
| 3 | 7660.02 | 52.22 | 3.83 | -7.19 | 48.86 | Max Avg | Horizontal | 180 | 330 | 54.0 | -5.1 | Pass |
| 4 | 16715.50 | 46.61 | 5.66 | 0.73 | 53.00 | Peak (NRB) | Vertical | 100 | 173 | -- | -- | Pass |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 180 of 198



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5785.00 MHz, Power Setting: 40, Duty Cycle (%): 99

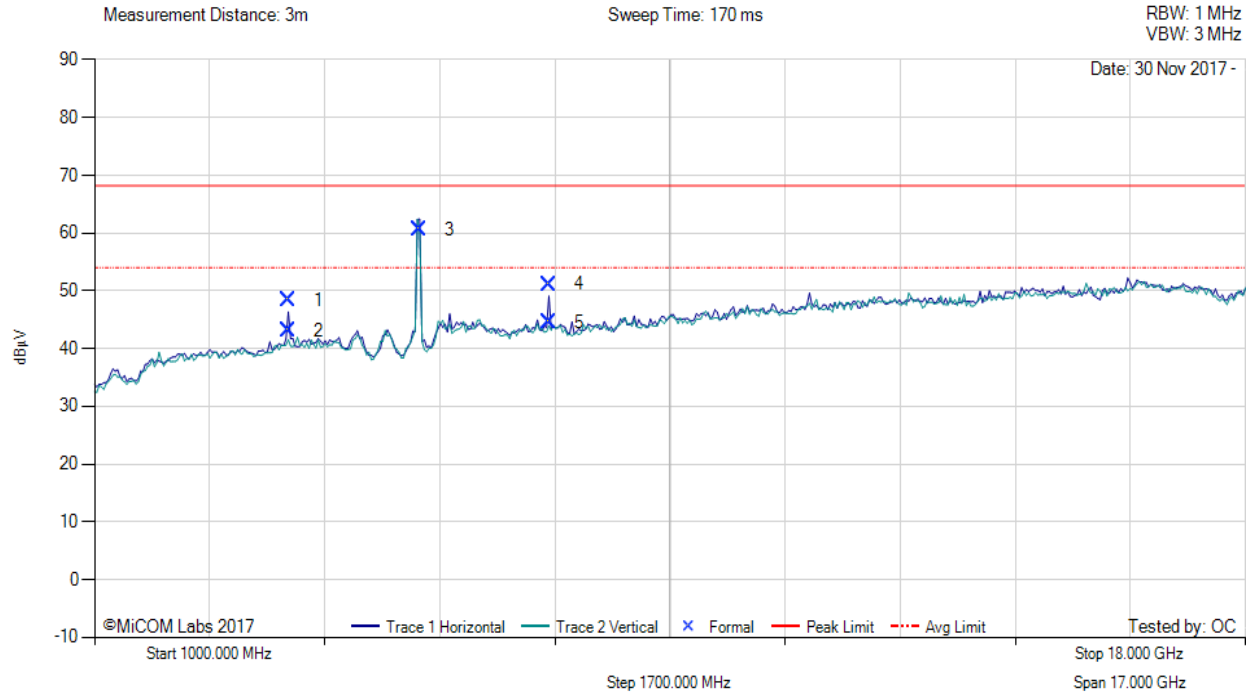

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 3856.93 | 57.27 | 2.74 | -11.61 | 48.40 | Max Peak | Horizontal | 98 | 195 | 68.2 | -19.8 | Pass |
| 2 | 3856.93 | 51.92 | 2.74 | -11.61 | 43.05 | Max Avg | Horizontal | 98 | 195 | 54.0 | -11.0 | Pass |
| 3 | 5790.54 | 68.16 | 3.20 | -10.80 | 60.56 | Fundamental | Vertical | 100 | 0 | -- | -- | |
| 4 | 7713.46 | 54.60 | 3.75 | -7.24 | 51.11 | Max Peak | Horizontal | 194 | 317 | 68.2 | -17.1 | Pass |
| 5 | 7713.46 | 48.10 | 3.75 | -7.24 | 44.61 | Max Avg | Horizontal | 194 | 317 | 54.0 | -9.4 | Pass |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 181 of 198



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5825.00 MHz, Power Setting: 40, Duty Cycle (%): 99

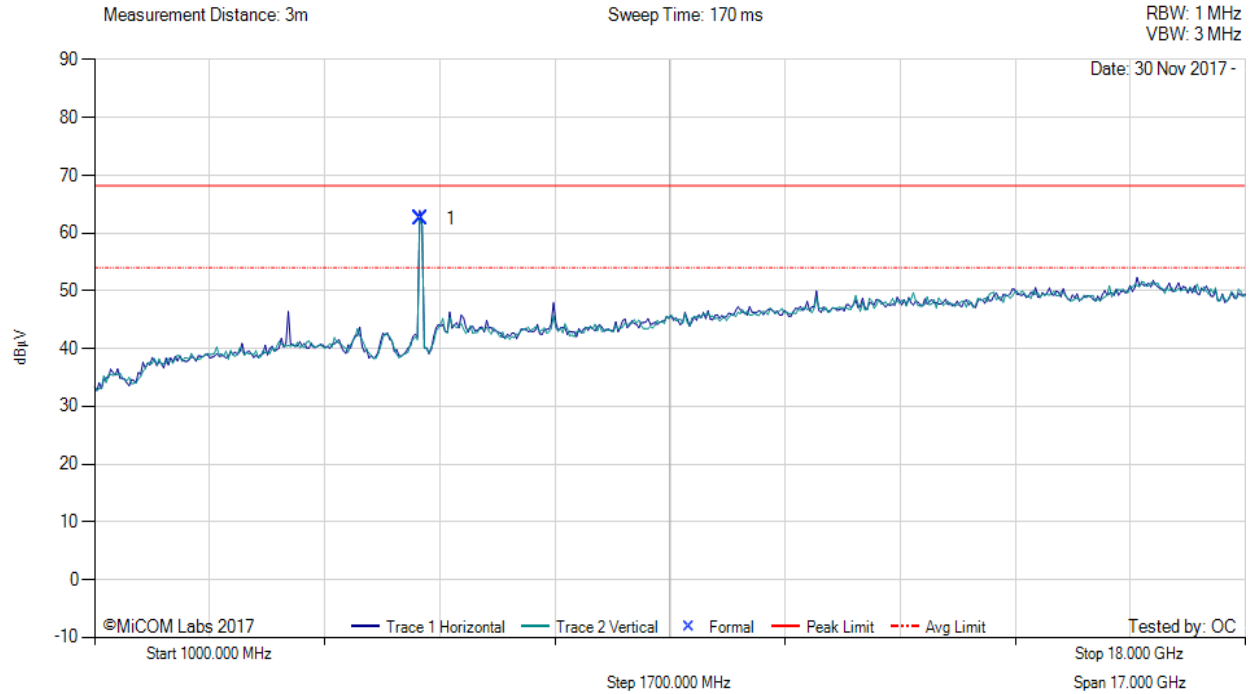

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5822.01 | 70.07 | 3.23 | -10.74 | 62.56 | Fundamental | Horizontal | 100 | 0 | -- | -- | |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 182 of 198


A.4.2. Restricted Edge & Band-Edge Emissions

5150 - 5250 MHz



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 802.11a, Test Freq: 5180.00 MHz, Power Setting: 20, Duty Cycle (%): 99

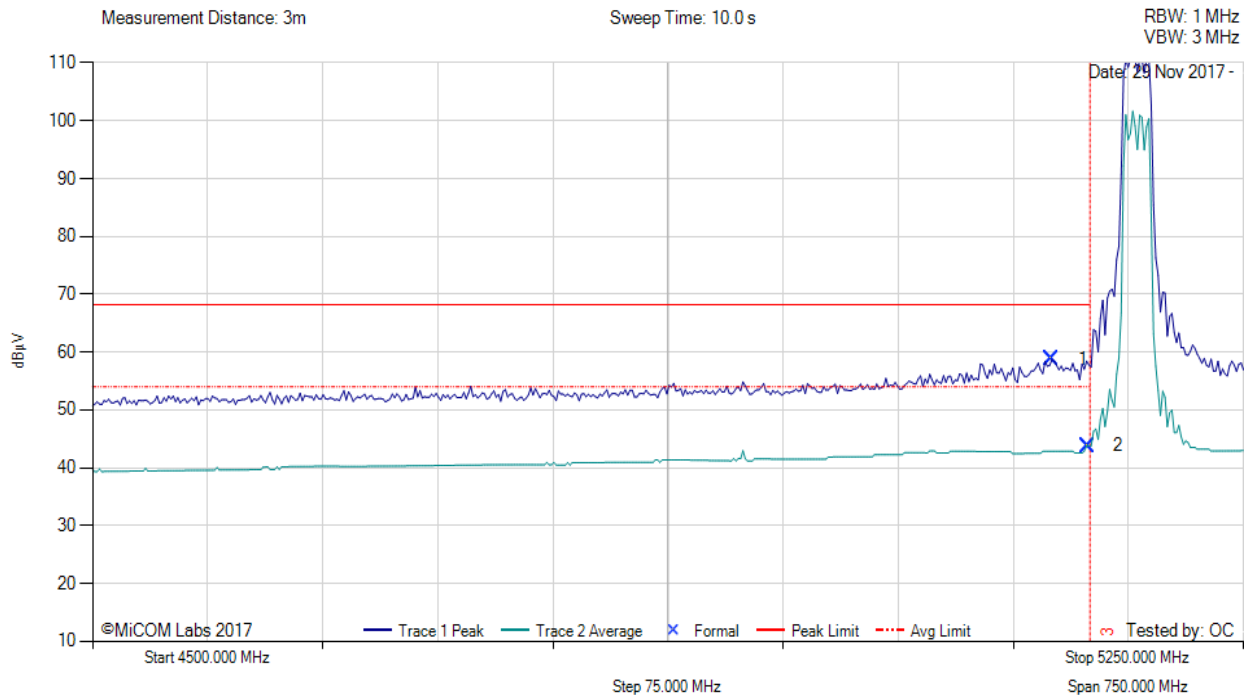

| 4500.00 - 5250.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5125.25 | 21.49 | 3.07 | 34.17 | 58.73 | Max Peak | Horizontal | 148 | 15 | 68.2 | -9.5 | Pass |
| 2 | 5148.50 | 6.53 | 3.06 | 34.21 | 43.80 | Max Avg | Horizontal | 148 | 15 | 54.0 | -10.2 | Pass |
| 3 | 5150.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 183 of 198



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 802.11ac-80, Test Freq: 5210.00 MHz, Power Setting: 17, Duty Cycle (%): 99

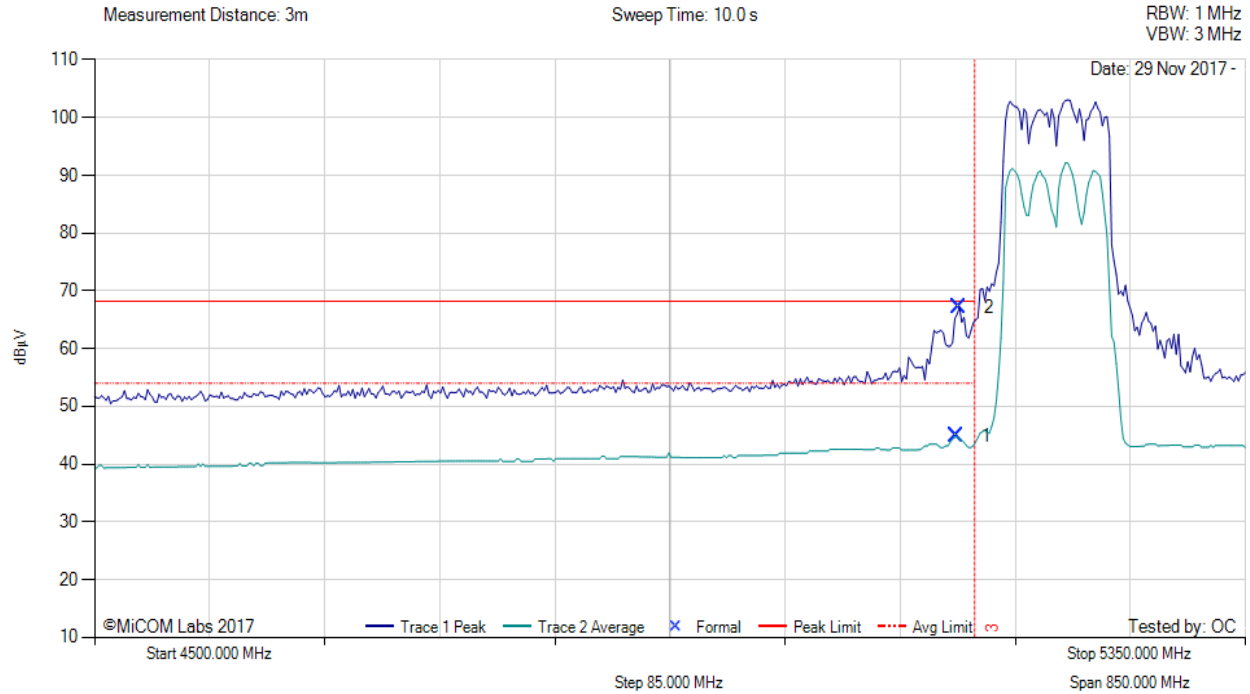

| 4500.00 - 5350.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5136.37 | 7.63 | 3.06 | 34.19 | 44.88 | Max Avg | Horizontal | 148 | 15 | 54.0 | -9.1 | Pass |
| 2 | 5138.08 | 29.93 | 3.06 | 34.19 | 67.18 | Max Peak | Horizontal | 148 | 15 | 68.2 | -1.1 | Pass |
| 3 | 5150.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 184 of 198



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 802.11n HT-20, Test Freq: 5180.00 MHz, Power Setting: 21, Duty Cycle (%): 99

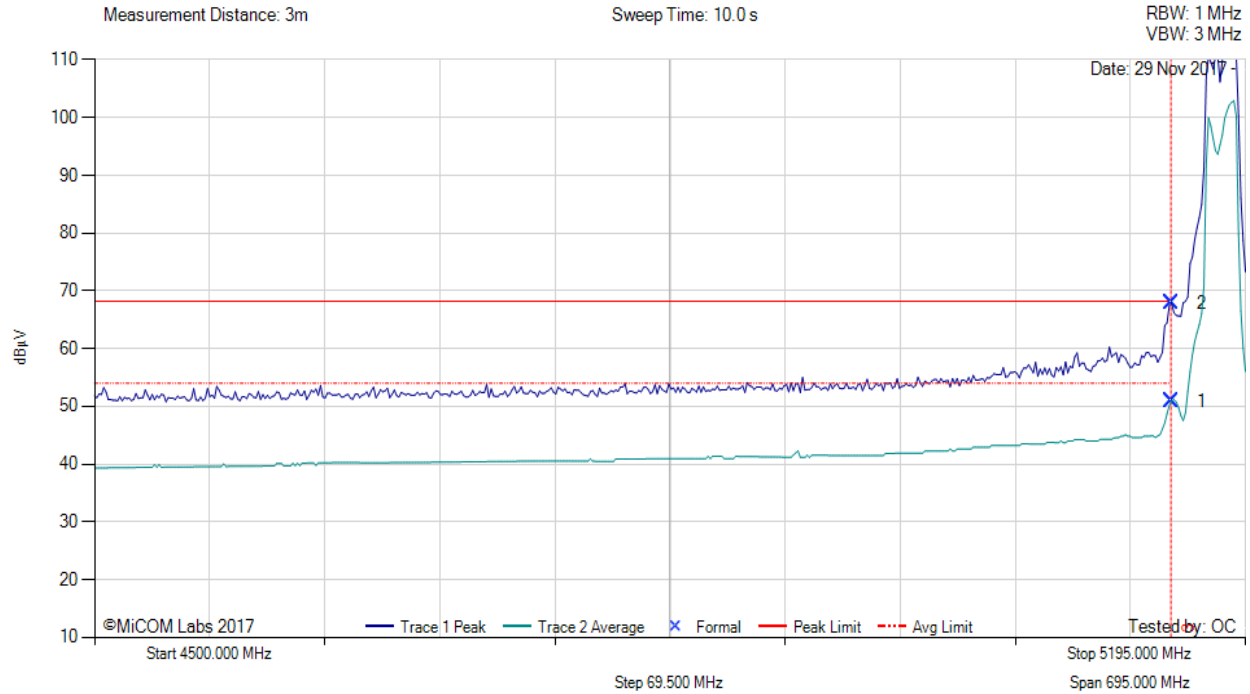

| 4500.00 - 5195.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5150.00 | 13.64 | 3.06 | 34.21 | 50.91 | Max Avg | Horizontal | 148 | 15 | 54.0 | -3.1 | Pass |
| 2 | 5150.00 | 30.56 | 3.06 | 34.21 | 67.83 | Max Peak | Horizontal | 148 | 15 | 68.2 | -0.4 | Pass |
| 3 | 5150.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 185 of 198



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 802.11n HT-40, Test Freq: 5190.00 MHz, Power Setting: 22, Duty Cycle (%): 99

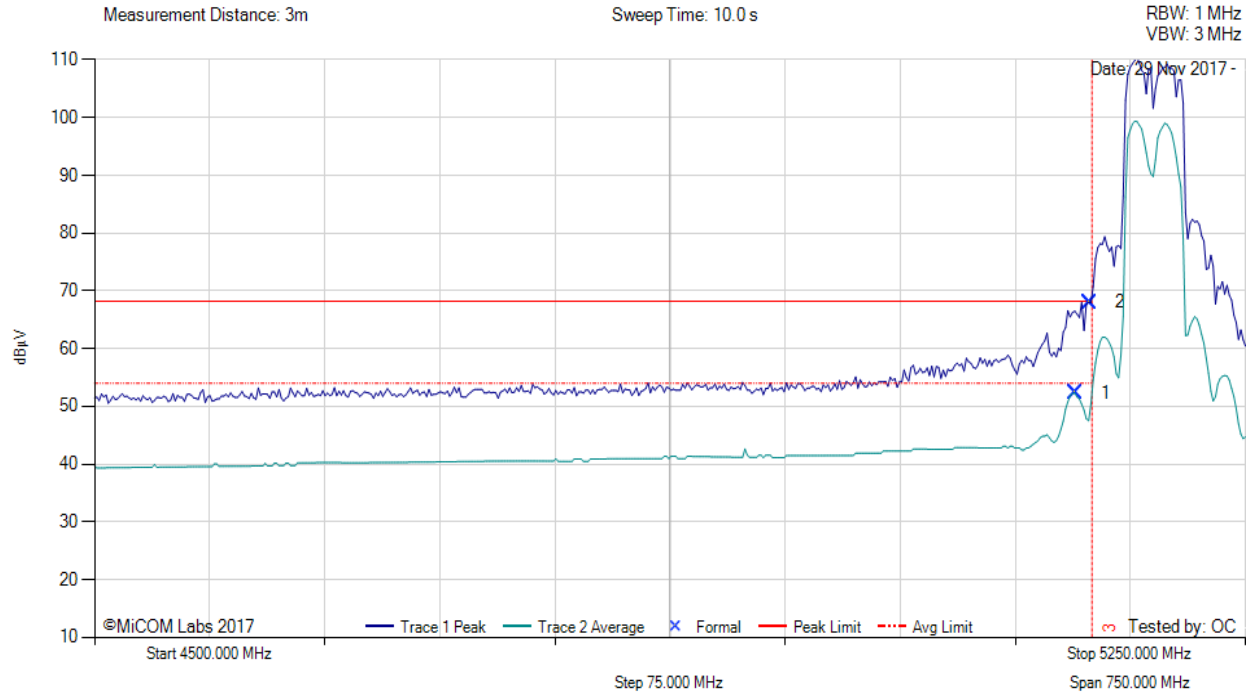

| 4500.00 - 5250.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5139.48 | 15.06 | 3.06 | 34.19 | 52.31 | Max Avg | Horizontal | 148 | 15 | 54.0 | -1.7 | Pass |
| 2 | 5148.50 | 30.78 | 3.06 | 34.21 | 68.05 | Max Peak | Horizontal | 148 | 15 | 68.2 | -0.2 | Pass |
| 3 | 5150.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 186 of 198


5725 - 5850 MHz

Lower Band-Edge



5725 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 802.11a, Test Freq: 5745.00 MHz, Power Setting: 40, Duty Cycle (%): 99

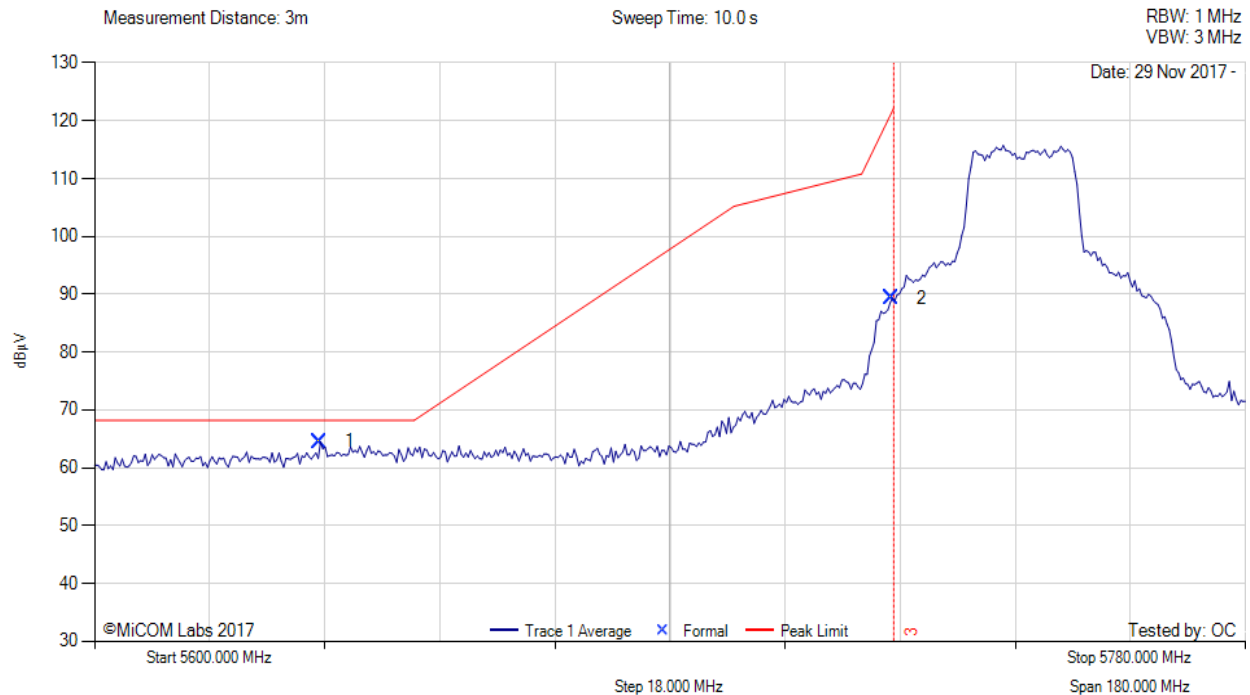

| 5600.00 - 5780.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5635.18 | 26.70 | 3.20 | 34.64 | 64.54 | Max Peak | Horizontal | 167 | 338 | 68.2 | -3.7 | Pass |
| 2 | 5724.64 | 51.40 | 3.17 | 34.72 | 89.29 | Max Peak | Horizontal | 167 | 338 | 122.2 | -32.9 | Pass |
| 3 | 5725.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 187 of 198



5725 MHz RADIATED BAND-EDGE EMISSIONS

Variat: 802.11ac-80, Test Freq: 5775.00 MHz, Power Setting: 25, Duty Cycle (%): 99

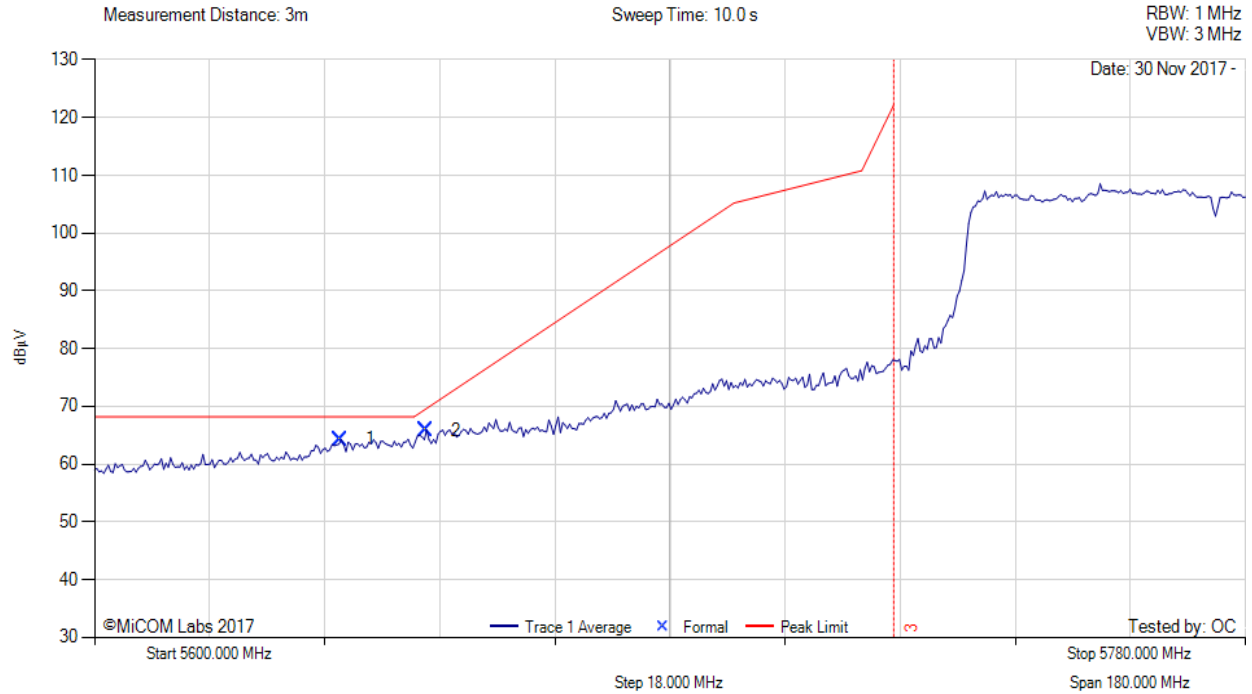

| 5600.00 - 5780.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5638.43 | 26.44 | 3.19 | 34.64 | 64.27 | Max Peak | Horizontal | 164 | 338 | 68.2 | -4.0 | Pass |
| 2 | 5651.87 | 28.05 | 3.22 | 34.63 | 65.90 | Max Peak | Horizontal | 164 | 338 | 69.7 | -3.8 | Pass |
| 3 | 5725.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 188 of 198



5725 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 802.11n HT-20, Test Freq: 5745.00 MHz, Power Setting: 40, Duty Cycle (%): 99

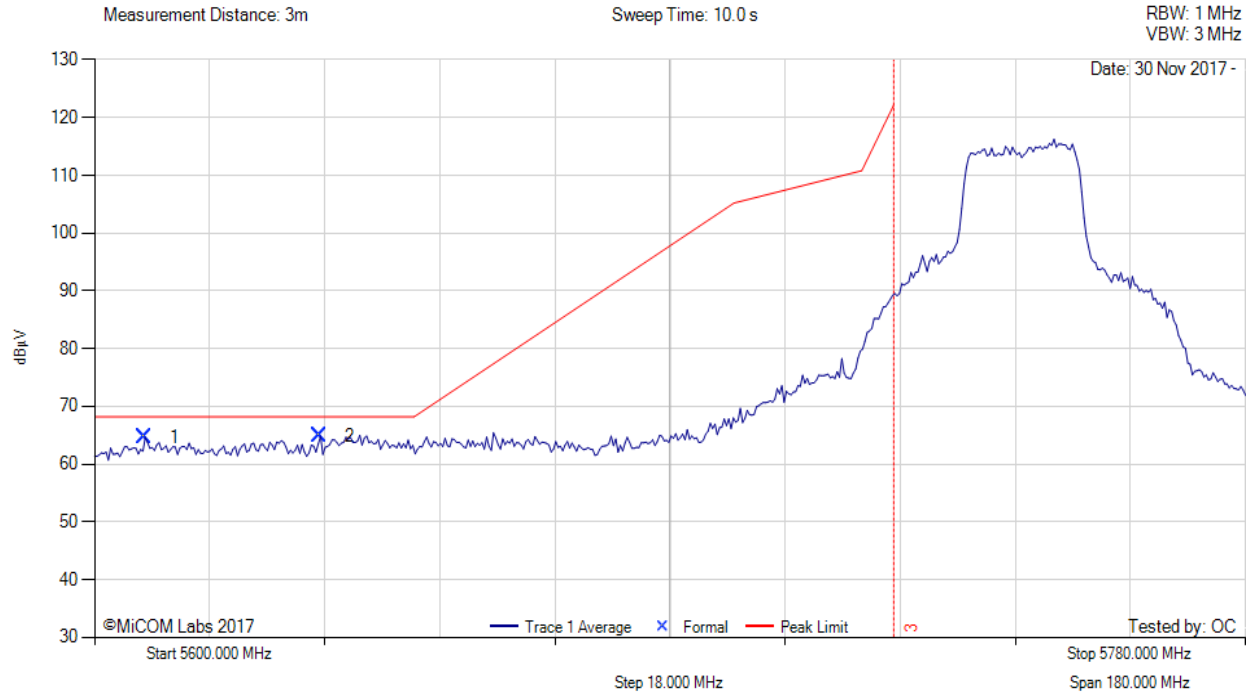

| 5600.00 - 5780.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5607.77 | 26.77 | 3.22 | 34.65 | 64.64 | Max Peak | Horizontal | 164 | 338 | 68.2 | -3.6 | Pass |
| 2 | 5635.18 | 27.01 | 3.20 | 34.64 | 64.85 | Max Peak | Horizontal | 164 | 338 | 68.2 | -3.4 | Pass |
| 3 | 5725.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 189 of 198



5725 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 802.11n HT-40, Test Freq: 5755.00 MHz, Power Setting: 40, Duty Cycle (%): 99

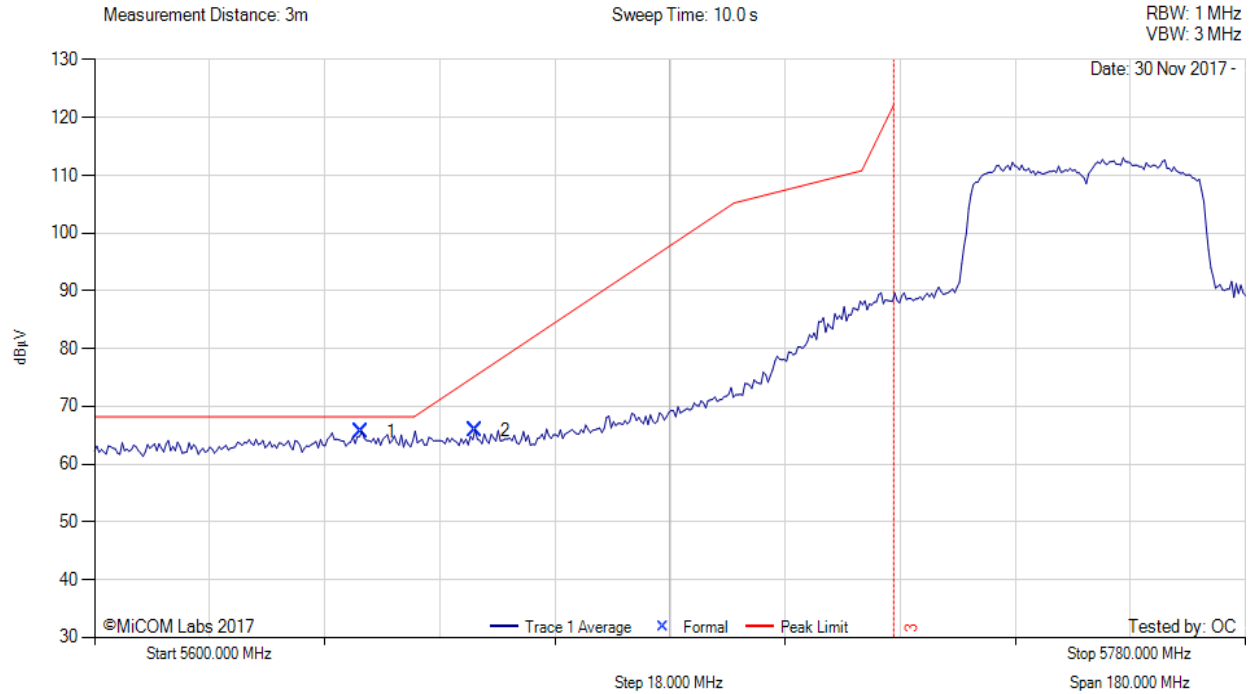

| 5600.00 - 5780.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5641.67 | 27.85 | 3.18 | 34.64 | 65.67 | Max Peak | Horizontal | 164 | 338 | 68.2 | -2.6 | Pass |
| 2 | 5659.45 | 28.04 | 3.21 | 34.64 | 65.89 | Max Peak | Horizontal | 164 | 338 | 74.9 | -9.0 | Pass |
| 3 | 5725.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Higher Band-Edge



5850 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 802.11a, Test Freq: 5825.00 MHz, Power Setting: 40, Duty Cycle (%): 99

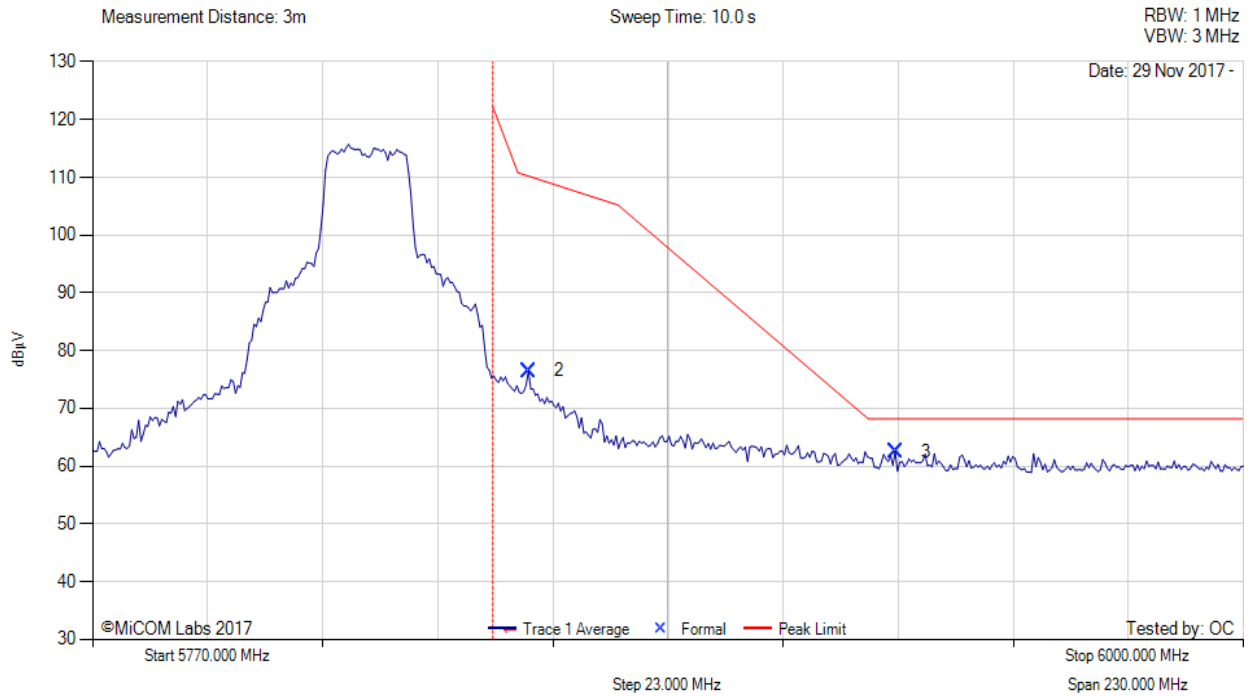

| 5770.00 - 6000.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 2 | 5857.11 | 38.30 | 3.20 | 34.98 | 76.48 | Max Peak | Horizontal | 167 | 338 | 110.2 | -33.7 | Pass |
| 3 | 5930.52 | 24.25 | 3.18 | 35.11 | 62.54 | Max Peak | Horizontal | 167 | 338 | 68.2 | -5.7 | Pass |
| 1 | 5850.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 191 of 198



5850 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 802.11ac-80, Test Freq: 5775.00 MHz, Power Setting: 25, Duty Cycle (%): 99

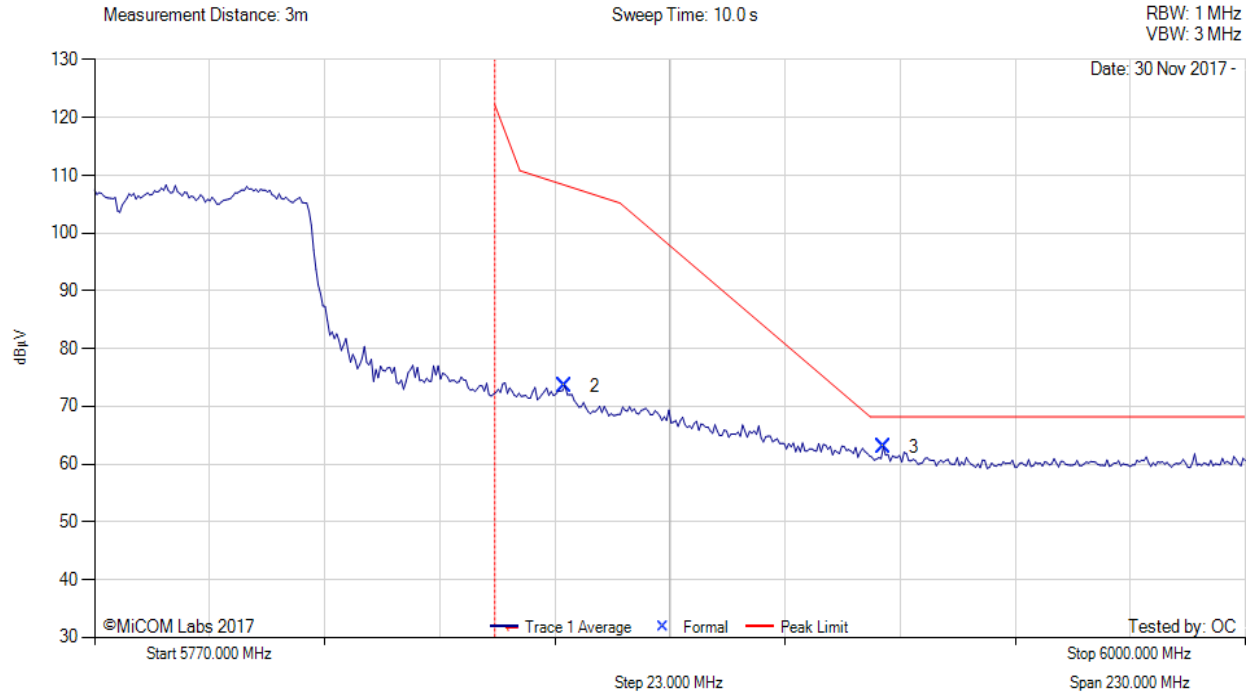

| 5770.00 - 6000.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 2 | 5863.83 | 35.34 | 3.20 | 35.00 | 73.54 | Max Peak | Horizontal | 164 | 338 | 108.3 | -34.8 | Pass |
| 3 | 5927.76 | 24.62 | 3.19 | 35.11 | 62.92 | Max Peak | Horizontal | 164 | 338 | 68.2 | -5.3 | Pass |
| 1 | 5850.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 192 of 198



5850 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 802.11n HT-20, Test Freq: 5825.00 MHz, Power Setting: 40, Duty Cycle (%): 99

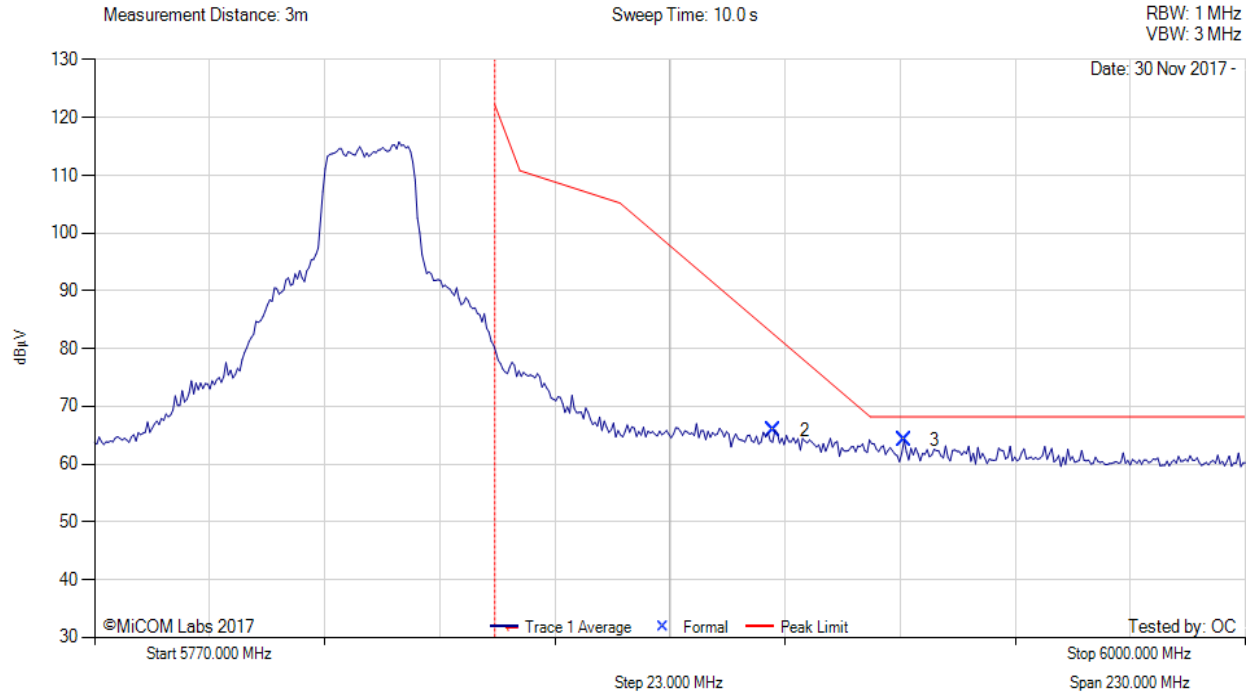

| 5770.00 - 6000.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 2 | 5905.77 | 27.59 | 3.22 | 35.10 | 65.91 | Max Peak | Horizontal | 164 | 338 | 82.4 | -16.5 | Pass |
| 3 | 5931.90 | 25.81 | 3.19 | 35.11 | 64.11 | Max Peak | Horizontal | 164 | 338 | 68.2 | -4.1 | Pass |
| 1 | 5850.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 193 of 198



5850 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 802.11n HT-40, Test Freq: 5795.00 MHz, Power Setting: 40, Duty Cycle (%): 99

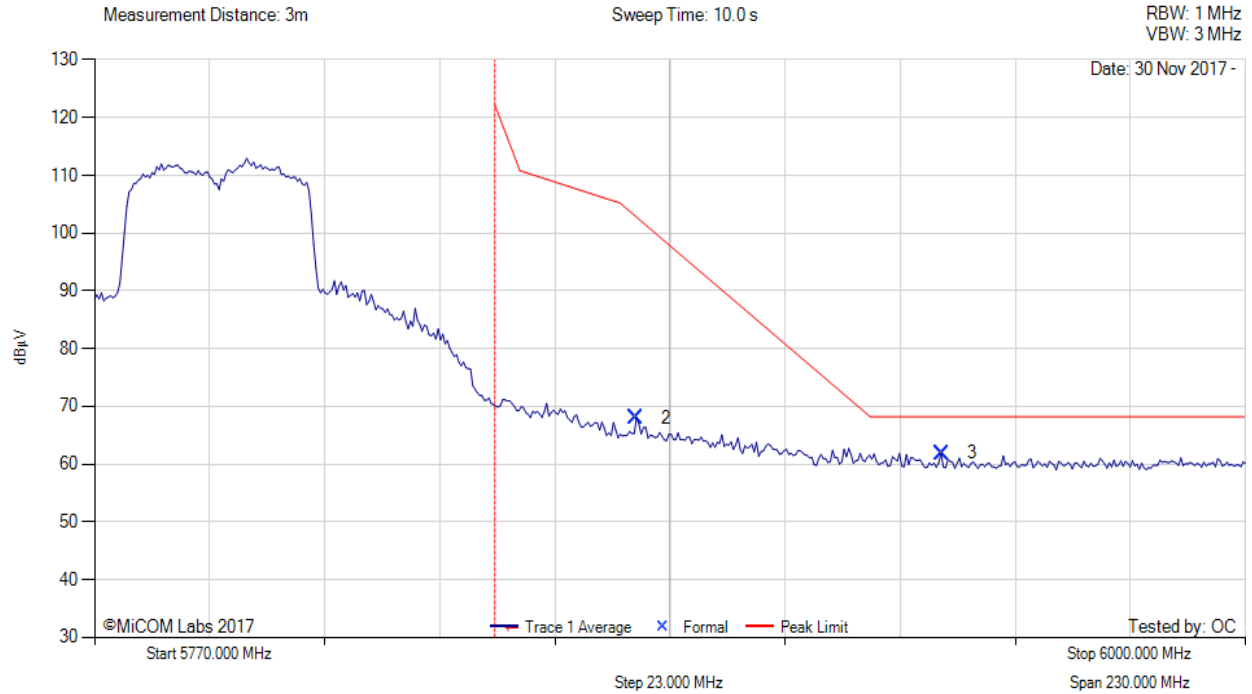

| 5770.00 - 6000.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 2 | 5878.12 | 29.77 | 3.21 | 35.04 | 68.02 | Max Peak | Horizontal | 164 | 338 | 102.8 | -34.8 | Pass |
| 3 | 5939.28 | 23.57 | 3.21 | 35.12 | 61.90 | Max Peak | Horizontal | 164 | 338 | 68.2 | -6.3 | Pass |
| 1 | 5850.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



A.4.3. Digital Emissions



Variant: Digital Emissions, Test Freq: 30 - 1000 MHz

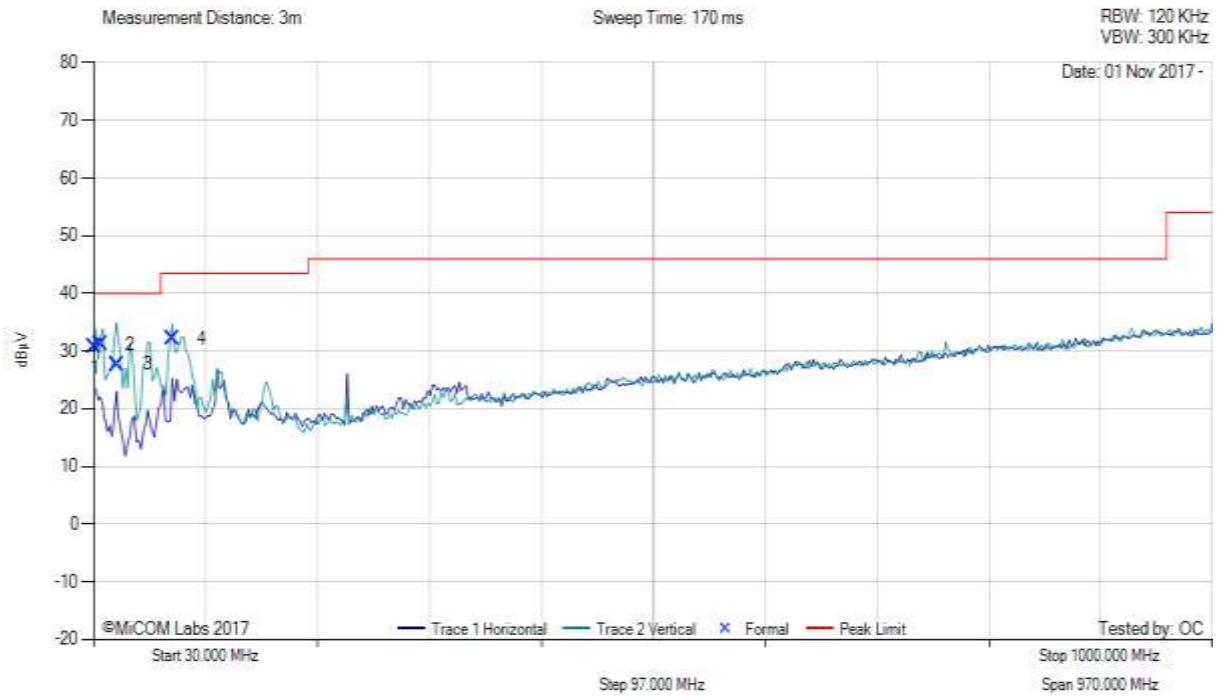

| 30.00 - 1000.00 MHz | | | | | | | | | | | | |
|---------------------|---------------|----------|---------------|--------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | PoI | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 30.66 | 37.63 | 3.41 | -10.38 | 30.66 | MaxQP | Vertical | 100 | 157 | 40.0 | -9.3 | Pass |
| 2 | 36.11 | 43.24 | 3.45 | -15.57 | 31.12 | MaxQP | Vertical | 100 | 356 | 40.0 | -8.9 | Pass |
| 3 | 50.51 | 47.10 | 3.55 | -22.95 | 27.70 | MaxQP | Vertical | 100 | 71 | 40.0 | -12.3 | Pass |
| 4 | 98.09 | 49.54 | 3.82 | -21.18 | 32.18 | MaxQP | Vertical | 100 | 88 | 43.5 | -11.3 | Pass |

Test Notes: Model: RBD52G-5HacD2HnD-TC. AC/DC + PoE configuration. Placed 80cm non-conductive table.

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 195 of 198



Variant: Digital Emissions, Test Freq: 30 - 1000 MHz

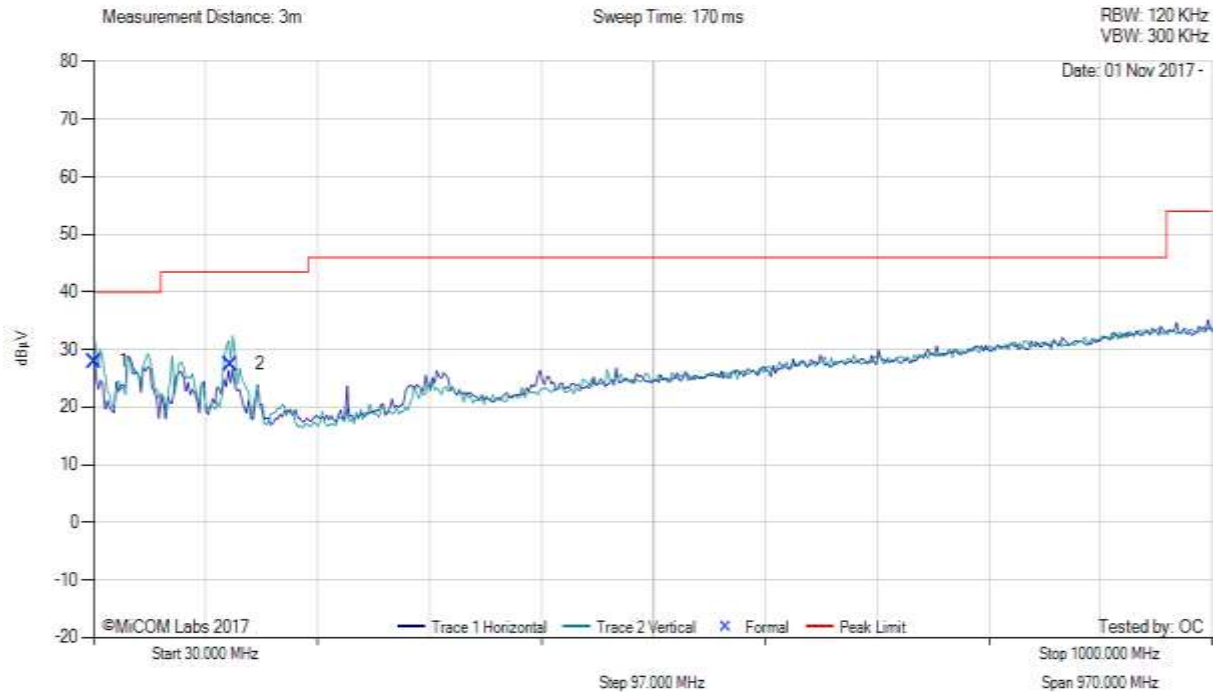

| 30.00 - 1000.00 MHz | | | | | | | | | | | | |
|---------------------|---------------|----------|---------------|--------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 30.66 | 34.93 | 3.41 | -10.38 | 27.96 | MaxQP | Vertical | 98 | 117 | 40.0 | -12.0 | Pass |
| 2 | 148.16 | 42.18 | 4.04 | -18.76 | 27.46 | MaxQP | Vertical | 99 | 242 | 43.5 | -16.0 | Pass |

Test Notes: Model: RBD52G-5HacD2HnD-TC. AC/DC configuration. Placed 80cm non-conductive table.

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



A.4.4. AC Wireline Emissions



Variant: AC Wireline, Test Freq: 0.15 - 30 MHz

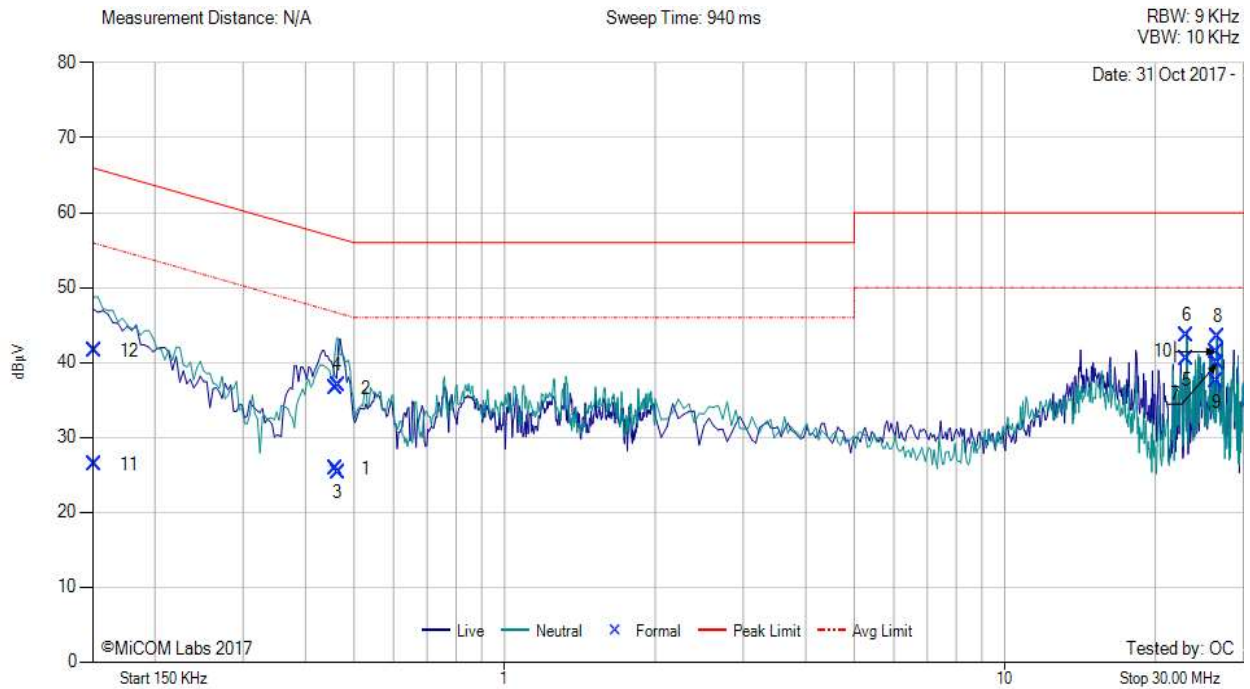

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | Factor dB | Total Correction dBµV | Corrected Value dBµV | Measurement Type | Line | Limit dBµV | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|-----------|-----------------------|----------------------|------------------|---------|------------|-----------|------------|
| 1 | 0.460 | 15.82 | 0.07 | 9.93 | 10.00 | 25.82 | Max Avg | Live | 47.1 | -21.3 | Pass |
| 2 | 0.460 | 26.61 | 0.07 | 9.93 | 10.00 | 36.61 | Max Qp | Live | 57.1 | -20.5 | Pass |
| 3 | 0.464 | 15.38 | 0.07 | 9.93 | 10.00 | 25.38 | Max Avg | Neutral | 47.0 | -21.7 | Pass |
| 4 | 0.464 | 26.88 | 0.07 | 9.93 | 10.00 | 36.88 | Max Qp | Neutral | 57.0 | -20.2 | Pass |
| 5 | 23.129 | 28.97 | 0.64 | 10.85 | 11.49 | 40.46 | Max Avg | Neutral | 50.0 | -9.5 | Pass |
| 6 | 23.129 | 32.15 | 0.64 | 10.85 | 11.49 | 43.64 | Max Qp | Neutral | 60.0 | -16.4 | Pass |
| 7 | 26.610 | 28.29 | 0.73 | 10.88 | 11.61 | 39.90 | Max Avg | Live | 50.0 | -10.1 | Pass |
| 8 | 26.610 | 31.82 | 0.73 | 10.88 | 11.61 | 43.43 | Max Qp | Live | 60.0 | -16.6 | Pass |
| 9 | 26.488 | 25.86 | 0.72 | 10.88 | 11.60 | 37.46 | Max Avg | Neutral | 50.0 | -12.5 | Pass |
| 10 | 26.488 | 29.85 | 0.72 | 10.88 | 11.60 | 41.45 | Max Qp | Neutral | 60.0 | -18.6 | Pass |
| 11 | 0.151 | 16.43 | 0.05 | 9.92 | 9.97 | 26.40 | Max Avg | Neutral | 56.0 | -29.6 | Pass |
| 12 | 0.151 | 31.64 | 0.05 | 9.92 | 9.97 | 41.61 | Max Qp | Neutral | 66.0 | -24.4 | Pass |

Test Notes: Model hAP ac2. AC/DC + PoE configuration. 120V 60Hz. AC Mains.

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Part 15 Subpart E 15.407 & RSS-247
Serial #: MIKO65-U6 Rev A
Issue Date: 22nd December 2017
Page: 197 of 198



Variant: AC Wireline, Test Freq: 0.15 - 30 MHz

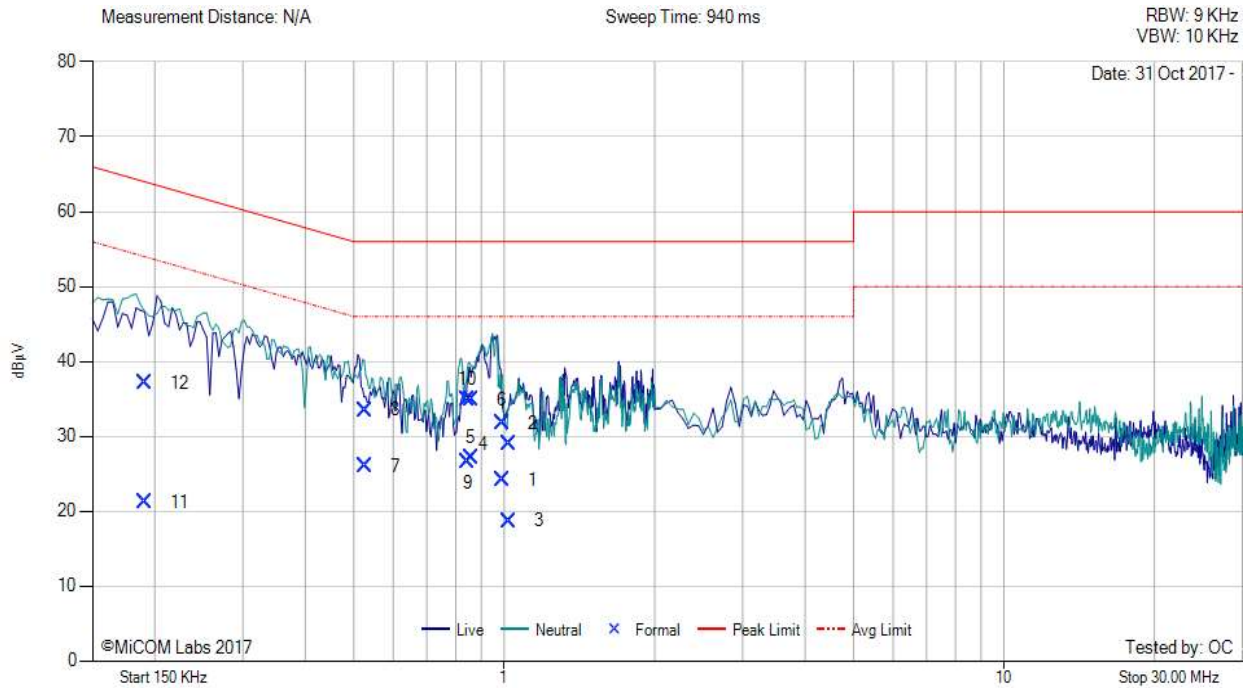

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | Factor dB | Total Correction dBµV | Corrected Value dBµV | Measurement Type | Line | Limit dBµV | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|-----------|-----------------------|----------------------|------------------|---------|------------|-----------|------------|
| 1 | 0.990 | 14.22 | 0.07 | 9.93 | 10.00 | 24.22 | Max Avg | Neutral | 46.0 | -21.8 | Pass |
| 2 | 0.990 | 21.72 | 0.07 | 9.93 | 10.00 | 31.72 | Max Qp | Neutral | 56.0 | -24.3 | Pass |
| 3 | 1.024 | 8.67 | 0.07 | 9.94 | 10.01 | 18.68 | Max Avg | Live | 46.0 | -27.3 | Pass |
| 4 | 1.024 | 18.99 | 0.07 | 9.94 | 10.01 | 29.00 | Max Qp | Live | 56.0 | -27.0 | Pass |
| 5 | 0.858 | 17.03 | 0.10 | 9.94 | 10.04 | 27.07 | Max Avg | Neutral | 46.0 | -18.9 | Pass |
| 6 | 0.858 | 24.85 | 0.10 | 9.94 | 10.04 | 34.89 | Max Qp | Neutral | 56.0 | -21.1 | Pass |
| 7 | 0.526 | 16.05 | 0.09 | 9.92 | 10.01 | 26.06 | Max Avg | Live | 46.0 | -19.9 | Pass |
| 8 | 0.526 | 23.47 | 0.09 | 9.92 | 10.01 | 33.48 | Max Qp | Live | 56.0 | -22.5 | Pass |
| 9 | 0.844 | 16.51 | 0.10 | 9.94 | 10.04 | 26.55 | Max Avg | Live | 46.0 | -19.5 | Pass |
| 10 | 0.844 | 24.89 | 0.10 | 9.94 | 10.04 | 34.93 | Max Qp | Live | 56.0 | -21.1 | Pass |
| 11 | 0.191 | 11.20 | 0.06 | 9.92 | 9.98 | 21.18 | Max Avg | Live | 54.8 | -33.7 | Pass |
| 12 | 0.191 | 27.08 | 0.06 | 9.92 | 9.98 | 37.06 | Max Qp | Live | 64.8 | -27.8 | Pass |

Test Notes: Model hAP ac2. AC/DC configuration. 120V 60Hz. AC Mains.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com