



FCC RADIO TEST REPORT

FCC ID : TV7SXTSQ60AD
Equipment : RouterBOARD SXTsq-60ad
Brand Name : MikroTik
Model Name : RBSXTsq-60ad
Applicant : Mikrotikls SIA
Brivibas gatve 214i, Riga, LV-1039 Latvia
Manufacturer : MIKROTIKLS SIA
Brivibas gatve 214i, Riga, LV-1039 Latvia
Standard : 47 CFR FCC Part 15.255

The product was received on Jul. 13, 2018, and testing was started from Jul. 28, 2018 and completed on Aug. 30, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013, 47 CFR FCC Part 15.255, Millimeter Wave Test Procedures and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.


Approved by: Sam Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 Information.....5

1.2 Additional Information Provided by the Submitter8

1.3 Accessories9

1.4 Support Equipment.....9

1.5 EUT Operation during Test9

1.6 Test Setup Diagram10

1.7 Testing Applied Standards13

1.8 Testing Location13

2 Test Configuration of Equipment under Test.....14

2.1 Test Channel Frequencies14

2.2 Conformance Tests and Related Test Frequencies.....14

2.3 Far Field Boundary Calculations14

3 Transmitter Test Result15

3.1 AC Power Conducted Emissions15

3.2 Occupied Bandwidth20

3.3 EIRP Power31

3.4 Peak Conducted Power.....34

3.5 Transmitter Spurious Emissions.....36

3.6 Frequency Stability52

3.7 Operation Restriction and Group Installation55

4 Test Equipment and Calibration Data56

5 Measurement Uncertainty58

Appendix A. Test Photos

Photographs of EUT v01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	FCC 15.207	AC Power Conducted Emissions	PASS	-
3.2	FCC 15.255(e)	Occupied Bandwidth	PASS	-
3.3	FCC 15.255(c)	EIRP Power	PASS	-
3.4	FCC 15.255(c)	Peak Conducted Power	PASS	-
3.5	FCC 15.255(d)	Transmitter Spurious Emissions	PASS	-
3.6	FCC 15.255(f)	Frequency Stability	PASS	-
3.7	FCC 15.255(a), (h)	Operation Restriction and Group Installation	PASS	-

Reviewed by: Sam Chen

Report Producer: Cindy Peng



1 General Description

1.1 Information

1.1.1 The Channel Plan(s)

Frequency Range	57-71 GHz
The Channel Plan(s)	
Channel 1: 58.32 GHz	
Channel 2: 60.48 GHz	
Channel 3: 62.64 GHz	
Channel 4: 64.80 GHz	

1.1.2 Antenna Information

Antenna Information		
<input type="checkbox"/> Equipment placed on the market without antennas		
<input checked="" type="checkbox"/> Integral antenna		
Integral antenna gain	12.13 dBi for Channel 1	13.48 dBi for Channel 2
	10.56 dBi for Channel 3	10.10 dBi for Channel 4
	<input type="checkbox"/> Temporary RF connector provided	
	<input checked="" type="checkbox"/> No temporary RF connector provided	
<input type="checkbox"/> External antenna (dedicated antennas)		
	<input type="checkbox"/> Single power level with corresponding antenna(s)	
	<input type="checkbox"/> Multiple power settings and corresponding antenna(s)	



1.1.3 Power Levels

Worst Power Levels for Channel 1			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Antenna gain	12.13 dBi		
Frequency (GHz)	Highest setting (P _{high}): (dBm)		
	Modulation	AV Power	Peak Power
58.32	MCS1	28.22	37.73

Worst Power Levels for Channel 2			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Antenna gain	13.48 dBi		
Frequency (GHz)	Highest setting (P _{high}): (dBm)		
	Modulation	AV Power	Peak Power
60.48	MCS1	27.17	37.85

Worst Power Levels for Channel 3			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Integral antenna gain	10.56 dBi		
Frequency (GHz)	Highest setting (P _{high}): (dBm)		
	Modulation	AV Power	Peak Power
62.64	MCS1	24.28	35.32

Worst Power Levels for Channel 4			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Integral antenna gain	10.10 dBi		
Frequency (GHz)	Highest setting (P _{high}): (dBm)		
	Modulation	AV Power	Peak Power
64.80	MCS1	16.61	28.97



1.1.4 Extreme Operating

The Extreme Operating Temperature Range that Apply to the Equipment	
<input checked="" type="checkbox"/> -40 °C to +50 °C	
<input type="checkbox"/> 0 °C to +40 °C	
<input type="checkbox"/> Other:	
EUT Power Type	From adapter with PoE
Supply Voltage	<input checked="" type="checkbox"/> AC State AC voltage 120 V
Supply Voltage	<input type="checkbox"/> DC State DC voltage V

1.1.5 Equipment Use Condition

Equipment Use Condition
<input type="checkbox"/> Fixed field disturbance sensors at 61-61.5GHz
<input type="checkbox"/> Except fixed field disturbance sensors at 61-61.5GHz
<input checked="" type="checkbox"/> Except fixed field disturbance sensors

1.1.6 User Condition

Intended Operation
<input checked="" type="checkbox"/> Indoor
<input checked="" type="checkbox"/> Outdoor (except outdoor fixed Point to Point)
<input type="checkbox"/> Outdoor fixed Point to Point



1.2 Additional Information Provided by the Submitter

1.2.1 Modulation

IEEE 802.11ad Modulation Scheme

MCS Index	Modulation	Code rate	Data rate (Mbit/s)
0	π /-2BPSK	1/2	27.5
1	π /-2BPSK	1/2	385
2	π /-2BPSK	1/2	770
3	π /-2BPSK	5/8	962.5
4	π /-2BPSK	3/4	1155
5	π /-2BPSK	13/16	1251.25
6	π /-2QPSK	1/2	1540
7	π /-2QPSK	5/8	1925
8	π /-2QPSK	3/4	2310
9	π /-2QPSK	13/16	2502.5
10	π /2-16QAM	1/2	3080
11	π /2-16QAM	5/8	3850
12	π /2-16QAM	3/4	4620

Channel Bandwidth is 2.16GHz

Can the transmitter operate un-modulated: Yes No

1.2.2 Duty Cycle

Duty Cycle	Duty Cycle Factor
The transmitter is intended for	100 %
	0.00



1.3 Accessories

Accessories					
No.	Equipment Name	Brand Name	Model Name	Rating	Remark
1	Adapter	MLF	MLF-A00122400380U0141	INPUT: 100-240V~50/60Hz, 0.4Amax. OUTPUT: 24V, 0.38A	-
2	PoE	MikroTik	RBGPOE	INPUT: 9-48V	Matched with adapter use

1.4 Support Equipment

For Test Site No: CO02-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB*2	DELL	E6430	N/A
2	Device	MikroTik	RBSXTsq-60ad	TV7SXTSQ60AD

For Test Site No: 03CH01-CB (below 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB*2	DELL	E4300	N/A
2	Device	MikroTik	RBSXTsq-60ad	TV7SXTSQ60AD

For Test Site No: 03CH01-CB (above 1GHz): N/A

For Test Site No: TH01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	N/A

1.5 EUT Operation during Test

For CTX Mode:

For Transmitter Spurious Emissions above 1GHz test:

Use the notebook to make EUT continuously transmit RF signal continuously and remove the notebook.


For other tests:

During the test, executed the test program to control the EUT continuously transmit RF signal.


For Normal Link:

During the test, the EUT operation to normal function.

1.6 Test Setup Diagram

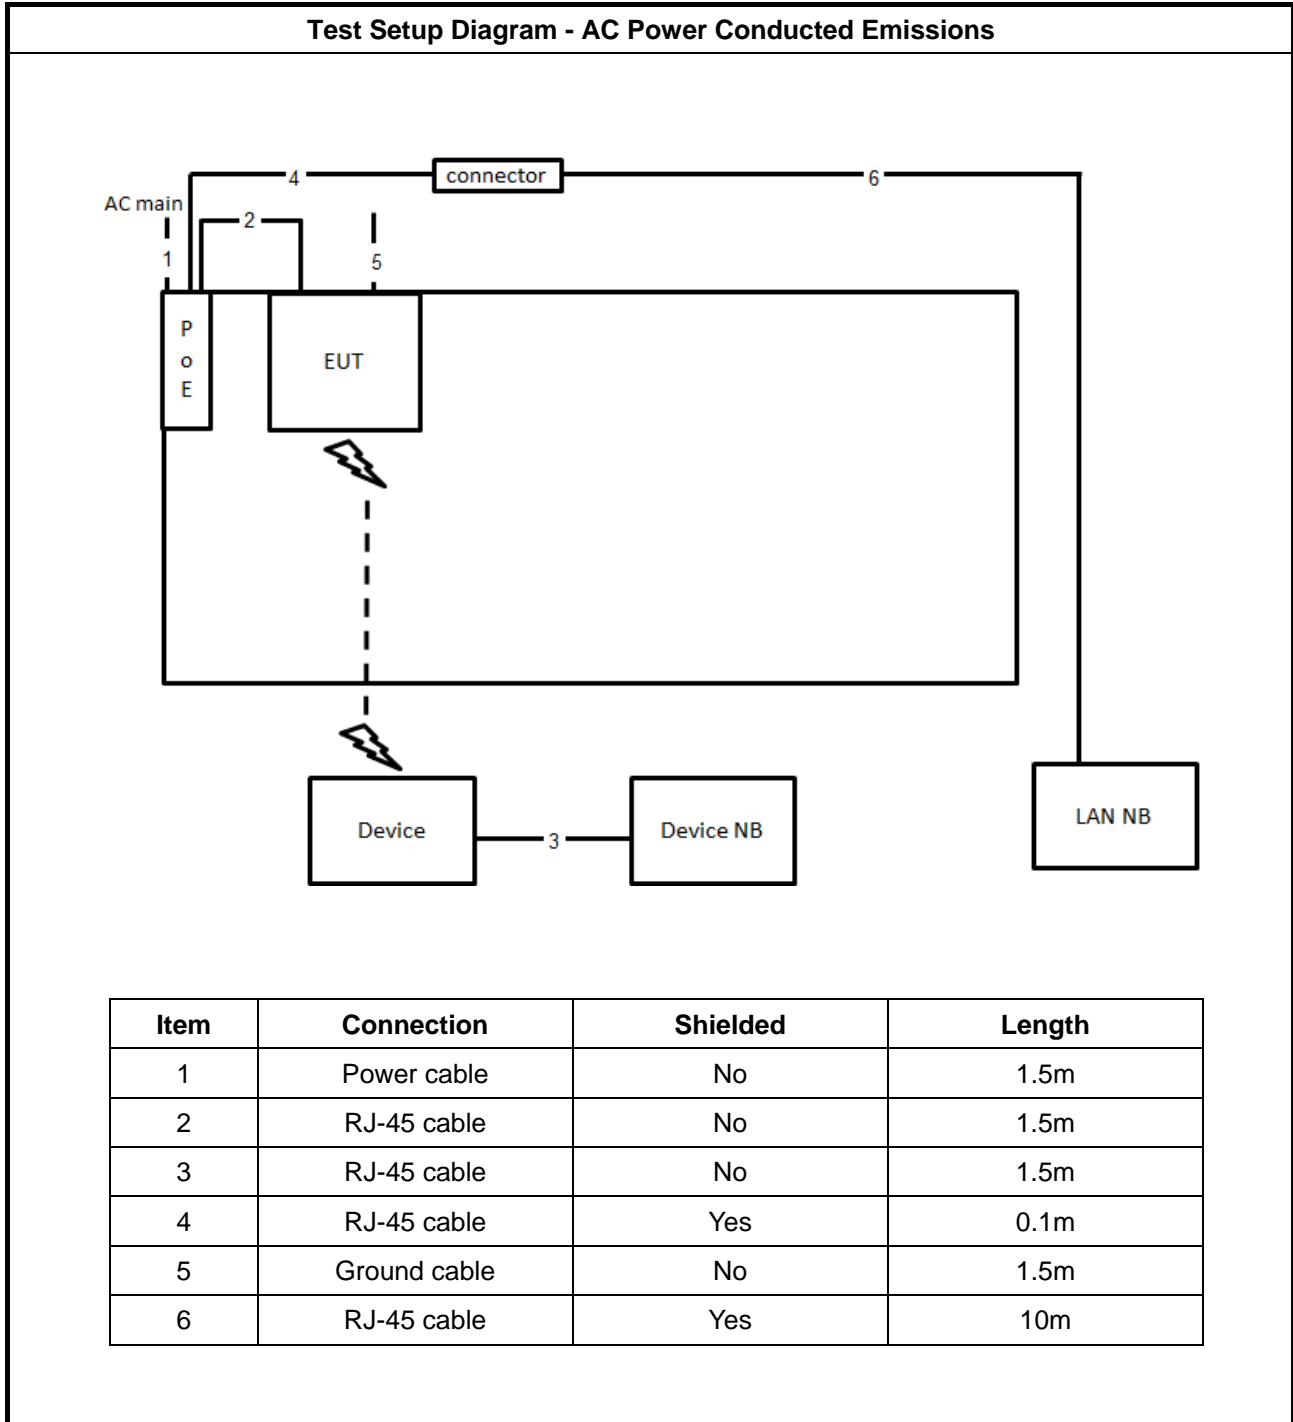


Test Setup Diagram - Transmitter Spurious Emissions below 1 GHz

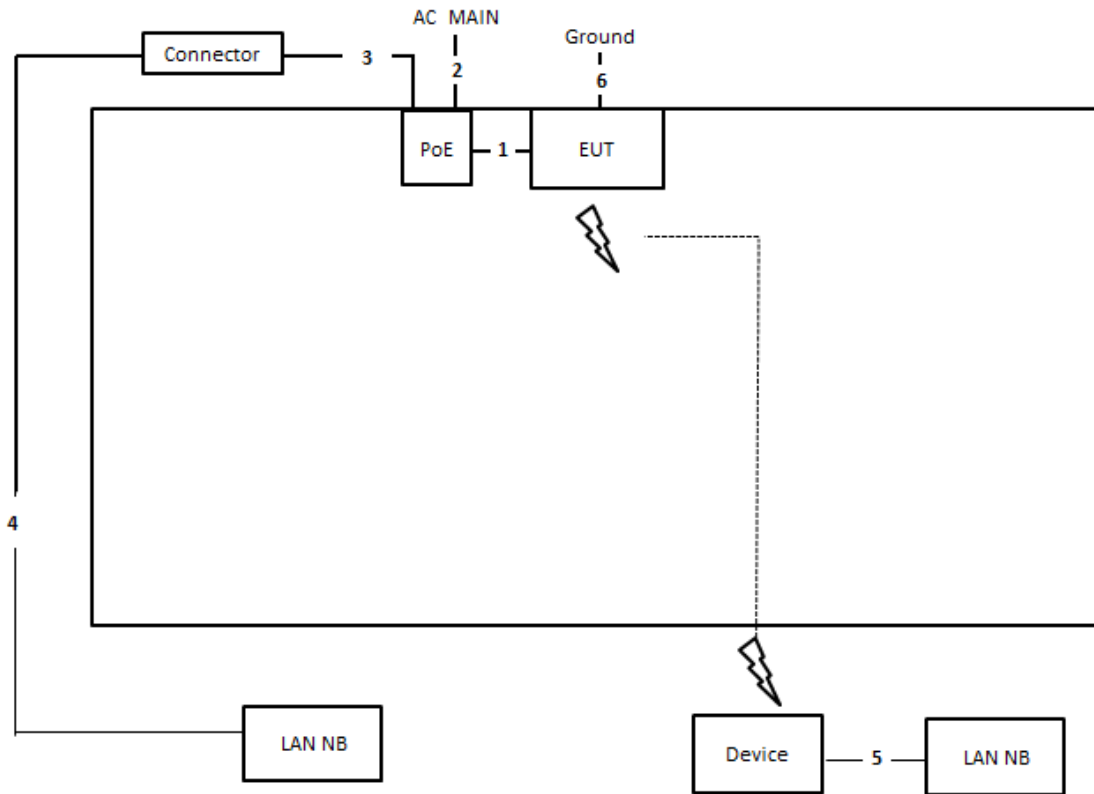

Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	Power cable	No	1.5m
3	RJ-45 cable	Yes	0.1m
4	RJ-45 cable	No	10m
5	RJ-45 cable	No	1.5m
6	Ground cable	No	1.5m



Test Setup Diagram - Transmitter Spurious Emissions above 1 GHz

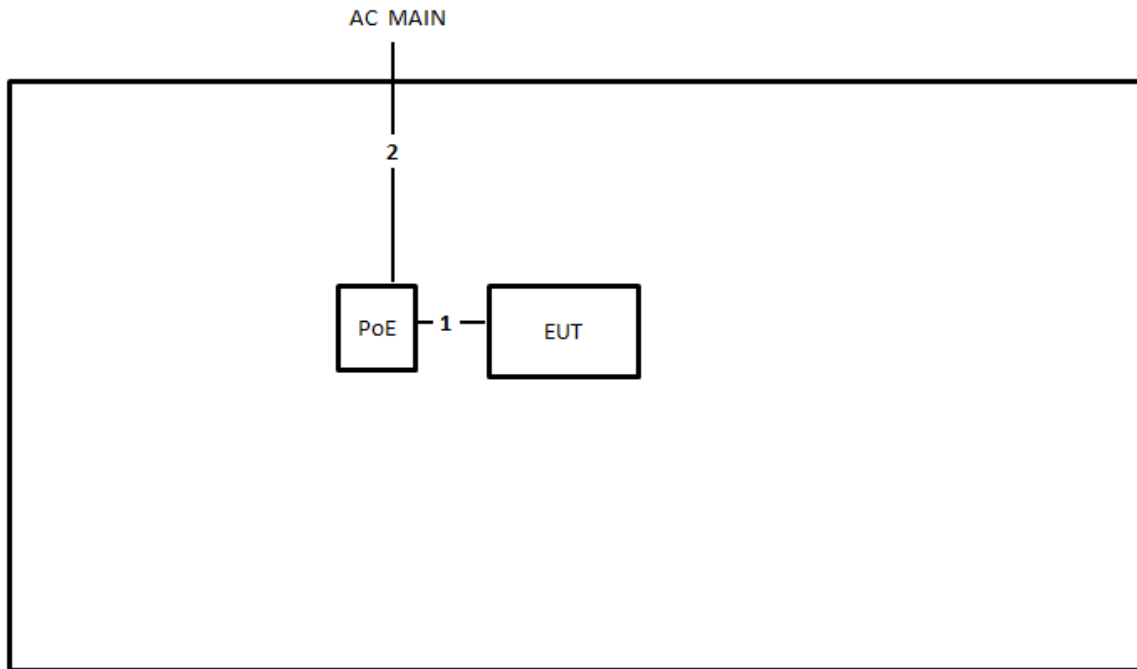

Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	Power cable	No	1.5m



1.7 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.255
- ♦ ANSI C63.10-2013 Section 9. "Procedures for testing millimeter-wave systems"

1.8 Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085
Test Site No.		
CO02-CB	03CH01-CB	TH01-CB

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.



2 Test Configuration of Equipment under Test

2.1 Test Channel Frequencies

Nominal Channel Bandwidth			
Channel 1 (GHz)	Channel 2 (GHz)	Channel 3 (GHz)	Channel 4 (GHz)
58.32	60.48	62.64	64.80

2.2 Conformance Tests and Related Test Frequencies

Test Item	Test Frequencies (GHz)
AC Power Conducted Emissions	Normal Link
Occupied Bandwidth	58.32, 60.48, 62.64, 64.80
EIRP Power	58.32, 60.48, 62.64, 64.80
Peak Conducted Power	58.32, 60.48, 62.64, 64.80
Transmitter Spurious Emissions (below 1 GHz)	Normal Link
Transmitter Spurious Emissions (1 GHz-40 GHz)	58.32, 60.48, 62.64, 64.80
Transmitter Spurious Emissions (above 40 GHz)	58.32, 60.48, 62.64, 64.80
Frequency Stability	Un-Modulation

Note: The EUT can only be used at Y axis position.

2.3 Far Field Boundary Calculations

The far-field boundary is given as:

$$\text{far field} = (2 * L^2) / \lambda$$

where:

L = Largest Antenna Dimension, including the reflector, in meters

λ = wavelength in meters

Far Field (m)				
Frequency (GHz)	L (m)	Lambda (m)	d(Far Field) (m)	d(Far Field) (cm)
58.32	0.02	0.0051440	0.156	15.55
60.48	0.02	0.0049603	0.161	16.13
62.64	0.02	0.0047893	0.167	16.70
64.80	0.02	0.0046296	0.173	17.28



3 Transmitter Test Result

3.1 AC Power Conducted Emissions

3.1.1 Limit of AC Power Conducted Emissions

AC Power Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.1.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 6.2.

3.1.4 Test Setup

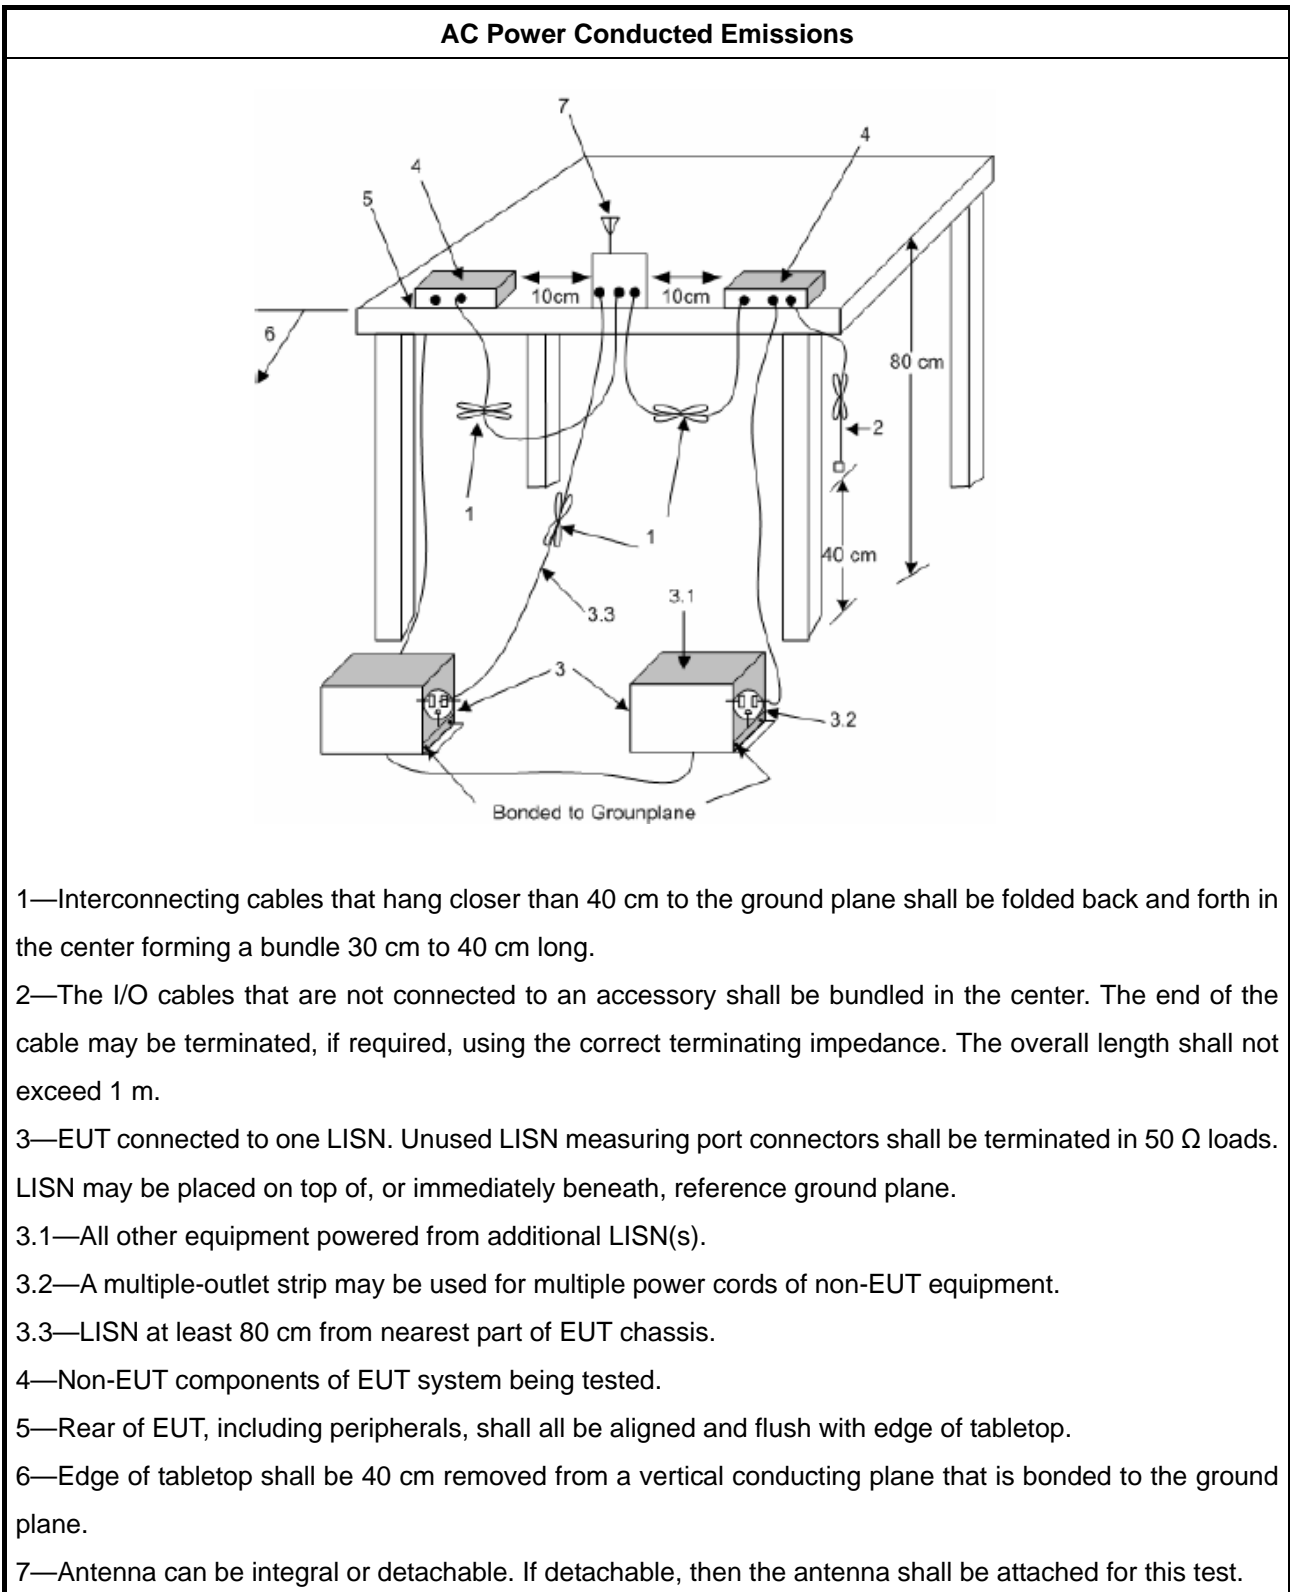




3.1.5 Test Result of AC Power Conducted Emissions

Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clause 6.2.3
<p>NOTE 1: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes. If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.12 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing.</p> <p>NOTE 2: ">20dB" means the tables in this clause should only list values of spurious emissions that exceed the level of 20 dB below the applicable limit, see ANSI C63.4, clause 10.1.8.1.</p>	




Temp	26°C	Humidity	60%
Test Engineer	Peter Wu	Phase	Line
Configuration	Normal Link		

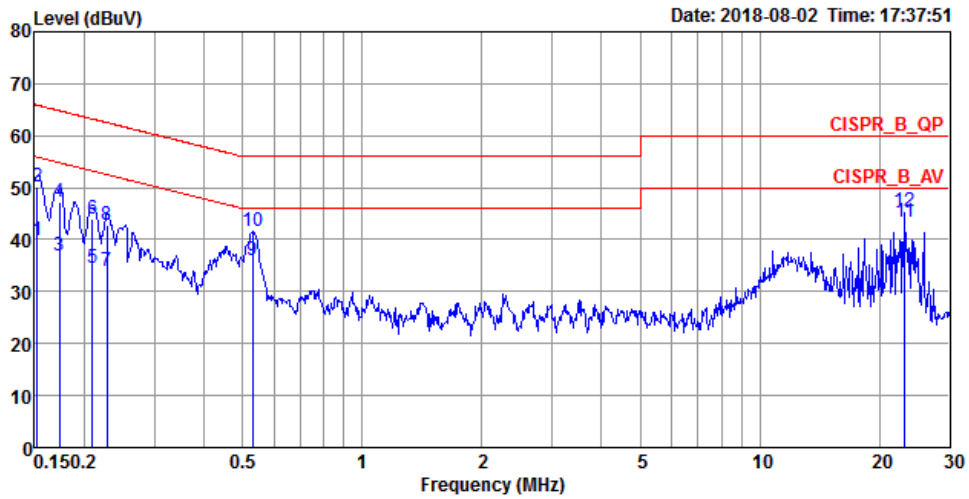

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1524	39.77	-16.10	55.87	29.60	10.16	0.01	Average	LINE
2	0.1524	50.06	-15.81	65.87	39.89	10.16	0.01	QP	LINE
3	0.1731	36.93	-17.88	54.81	26.76	10.16	0.01	Average	LINE
4	0.1731	47.11	-17.70	64.81	36.94	10.16	0.01	QP	LINE
5	0.2094	34.55	-18.68	53.23	24.38	10.16	0.01	Average	LINE
6	0.2094	43.93	-19.30	63.23	33.76	10.16	0.01	QP	LINE
7	0.2280	33.88	-18.64	52.52	23.71	10.16	0.01	Average	LINE
8	0.2280	42.85	-19.67	62.52	32.68	10.16	0.01	QP	LINE
9	0.5293	36.06	-9.94	46.00	25.87	10.16	0.03	Average	LINE
10	0.5293	41.51	-14.49	56.00	31.32	10.16	0.03	QP	LINE
11	23.1279	43.34	-6.66	50.00	32.72	10.45	0.17	Average	LINE
12	23.1279	45.41	-14.59	60.00	34.79	10.45	0.17	QP	LINE



Temp	26°C	Humidity	60%
Test Engineer	Peter Wu	Phase	Neutral
Configuration	Normal Link		

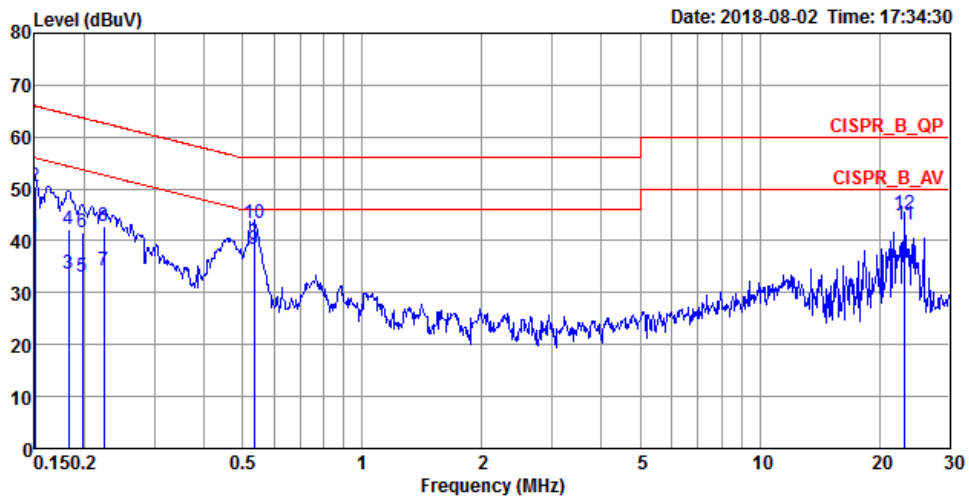

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1500	40.68	-15.32	56.00	30.50	10.17	0.01	Average	NEUTRAL
2	0.1500	50.39	-15.61	66.00	40.21	10.17	0.01	QP	NEUTRAL
3	0.1825	33.53	-20.84	54.37	23.35	10.17	0.01	Average	NEUTRAL
4	0.1825	42.24	-22.13	64.37	32.06	10.17	0.01	QP	NEUTRAL
5	0.1976	33.14	-20.57	53.71	22.96	10.17	0.01	Average	NEUTRAL
6	0.1976	41.52	-22.19	63.71	31.34	10.17	0.01	QP	NEUTRAL
7	0.2244	34.23	-18.43	52.66	24.05	10.17	0.01	Average	NEUTRAL
8	0.2244	42.76	-19.90	62.66	32.58	10.17	0.01	QP	NEUTRAL
9	0.5350	38.29	-7.71	46.00	28.09	10.17	0.03	Average	NEUTRAL
10	0.5350	43.38	-12.62	56.00	33.18	10.17	0.03	QP	NEUTRAL
11	23.1274	43.02	-6.98	50.00	32.41	10.44	0.17	Average	NEUTRAL
12	23.1274	45.26	-14.74	60.00	34.65	10.44	0.17	QP	NEUTRAL



3.2 Occupied Bandwidth

3.2.1 Limit of Occupied Bandwidth

6dBc Bandwidth (see Note 1)	None
26dBc Bandwidth	None
99% Occupied Bandwidth (see Note 2)	None

NOTE 1: The 6dBc bandwidth is the frequency bandwidth of the signal power at the -6 dBc points when measured with a 100 kHz resolution bandwidth. These measurements shall also be performed at normal test conditions.

NOTE 2: The 99% occupied bandwidth is the frequency bandwidth of the signal power at the 99% channel power of occupied bandwidth when resolution bandwidth should be approximately 1 % to 5 % of the occupied bandwidth (OBW). These measurements shall also be performed at normal test conditions.


3.2.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.2.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 6.9.2.

3.2.4 Test Setup

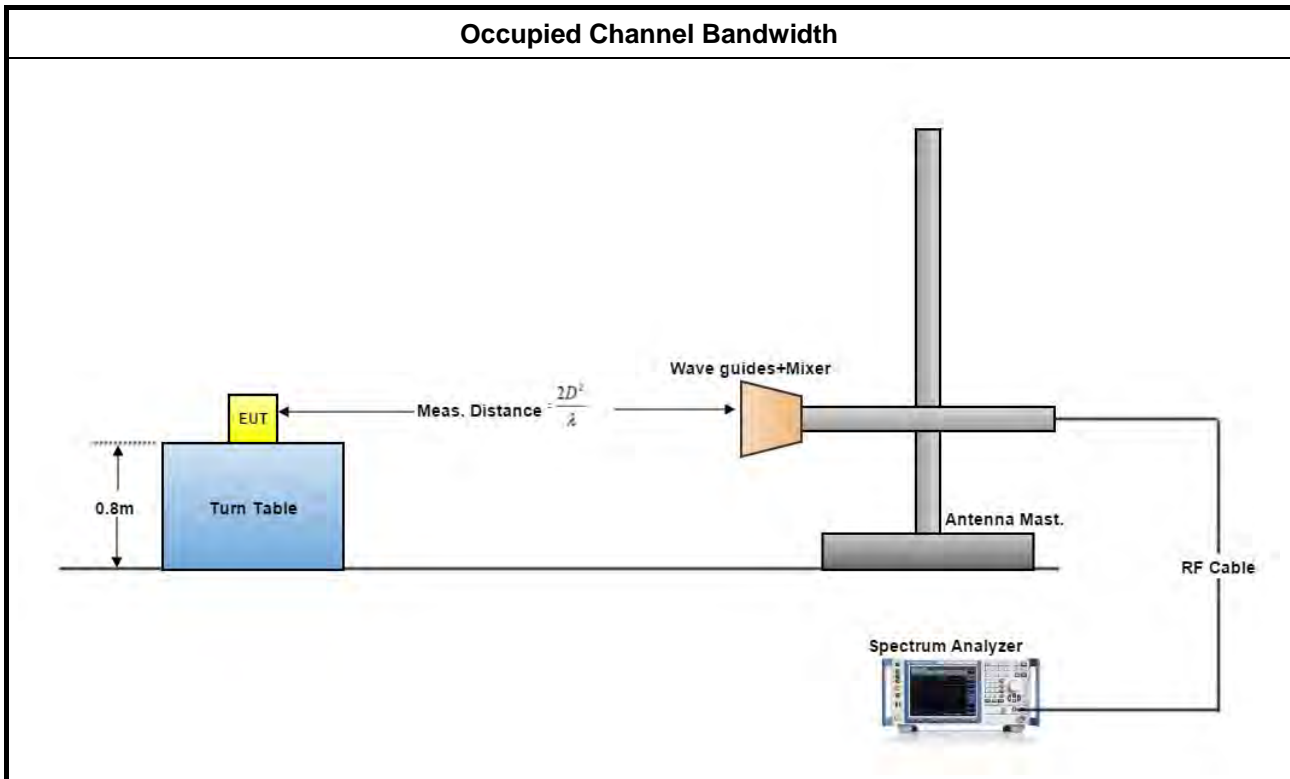





3.2.5 Test Result of Occupied Bandwidth

Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clause 6.9.2
<p>NOTE: If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing. Refer as ANSI C63.10, clause 15, observe and record with plotted graphs or photographs the worst-case (i.e., widest) occupied bandwidth produced by these different modulation sources.</p>	

Temp	22°C	Humidity	54%	
Test Engineer	Mason Chen			
Test Results				
Test Freq. (GHz)	6 dBc Bandwidth (MHz)	Occupied Bandwidth (MHz)	26 dBc Bandwidth (MHz)	Limit (MHz)
58.32	1539.80	1979.74	2246.00	N/A
60.48	1620.80	2454.41	6143.00	N/A
62.64	1250.40	2819.10	8828.00	N/A
64.80	1030.40	2691.75	11143.00	N/A




3.2.5.1 Bandwidth Plots

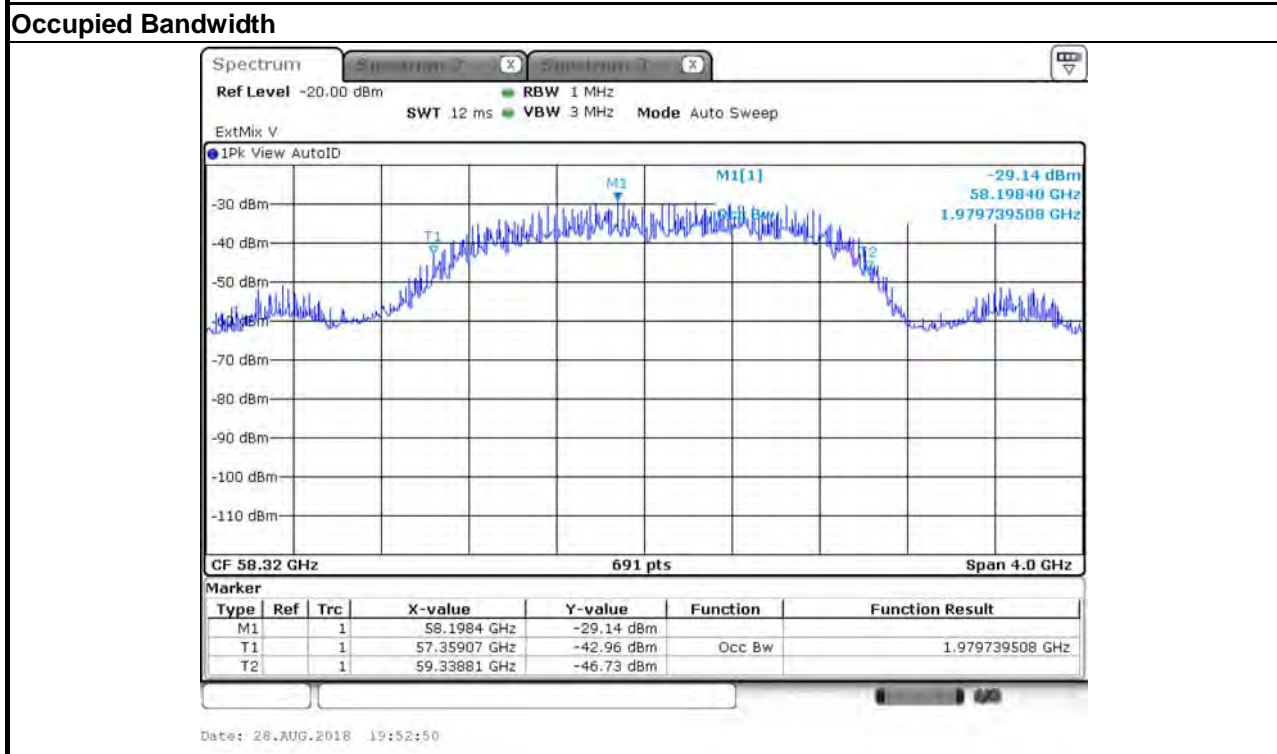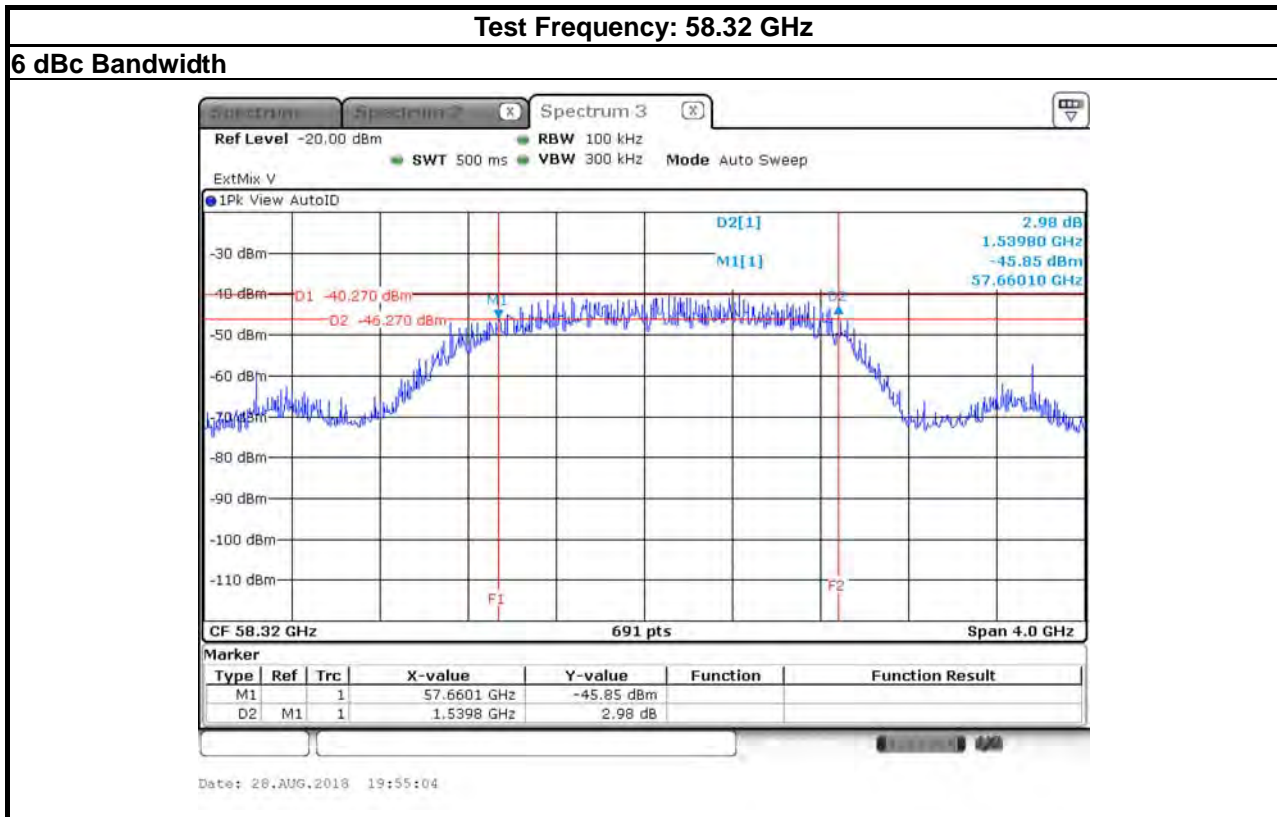



26 dBc Bandwidth

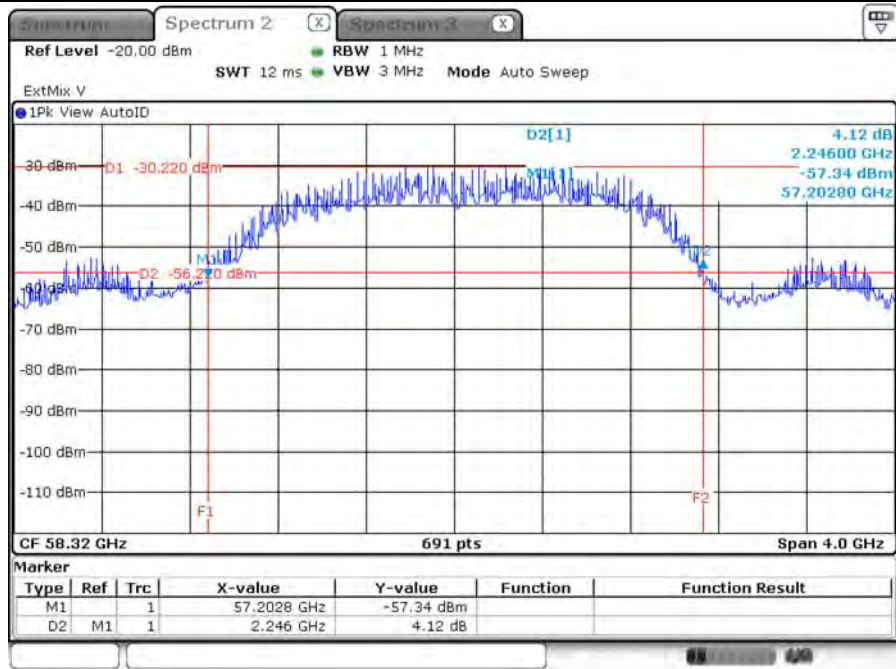


Date: 28.AUG.2018 19:54:03




Test Frequency: 60.48 GHz

6 dBc Bandwidth

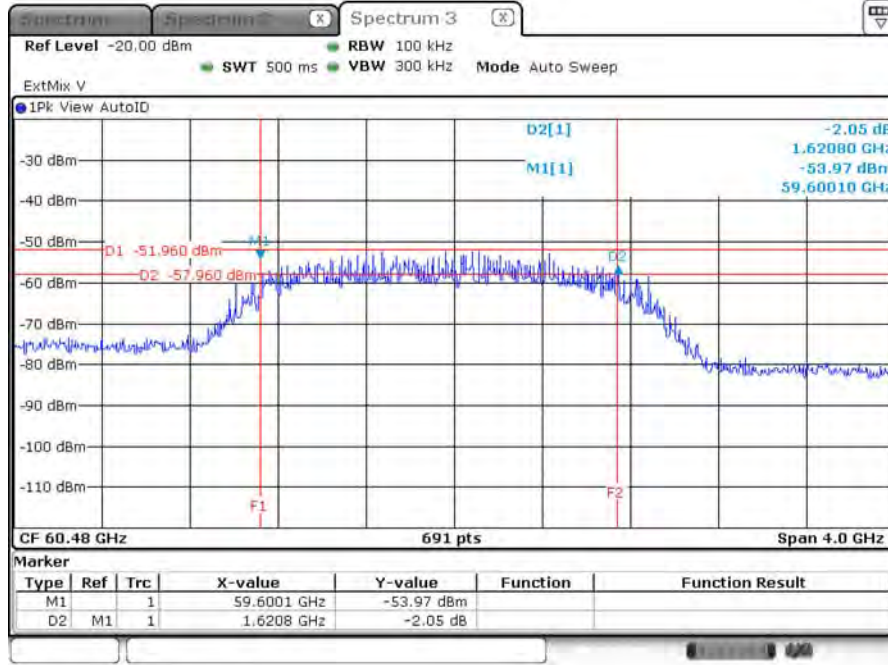

Date: 28.AUG.2018 20:02:38


Occupied Bandwidth

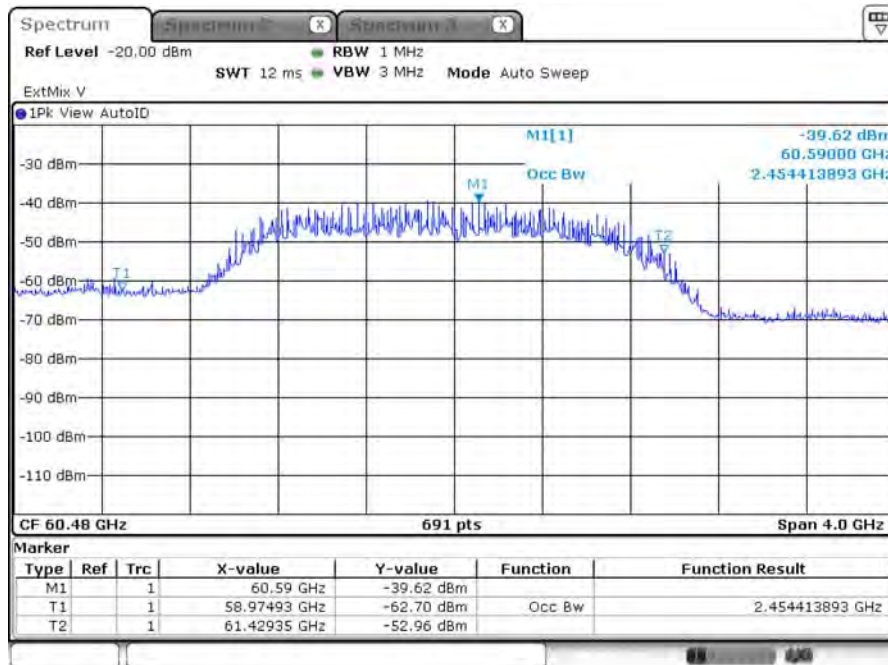

Date: 28.AUG.2018 19:59:12



26 dBc Bandwidth

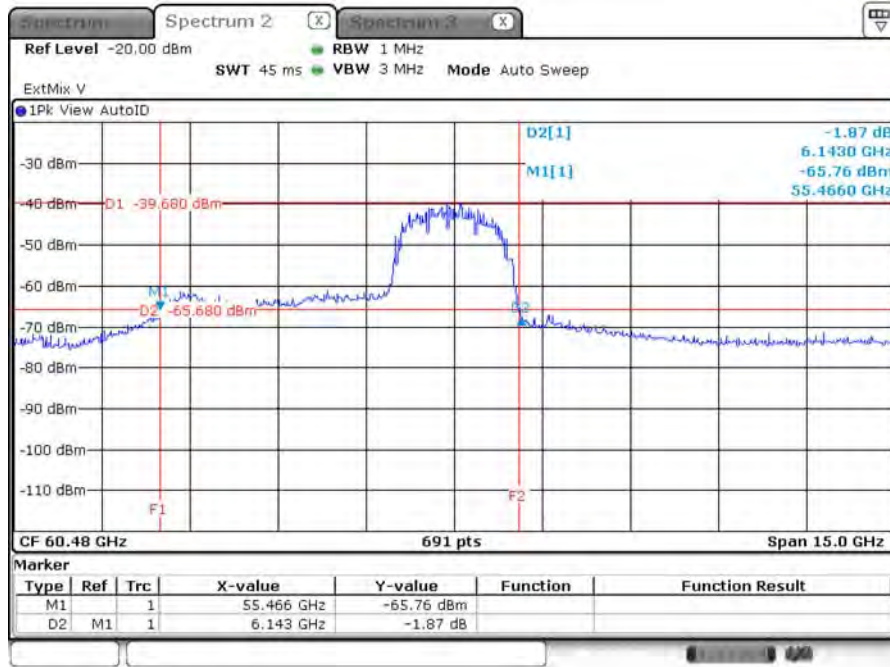


Date: 28.AUG.2018 20:01:48




Test Frequency: 62.64 GHz

6 dBc Bandwidth

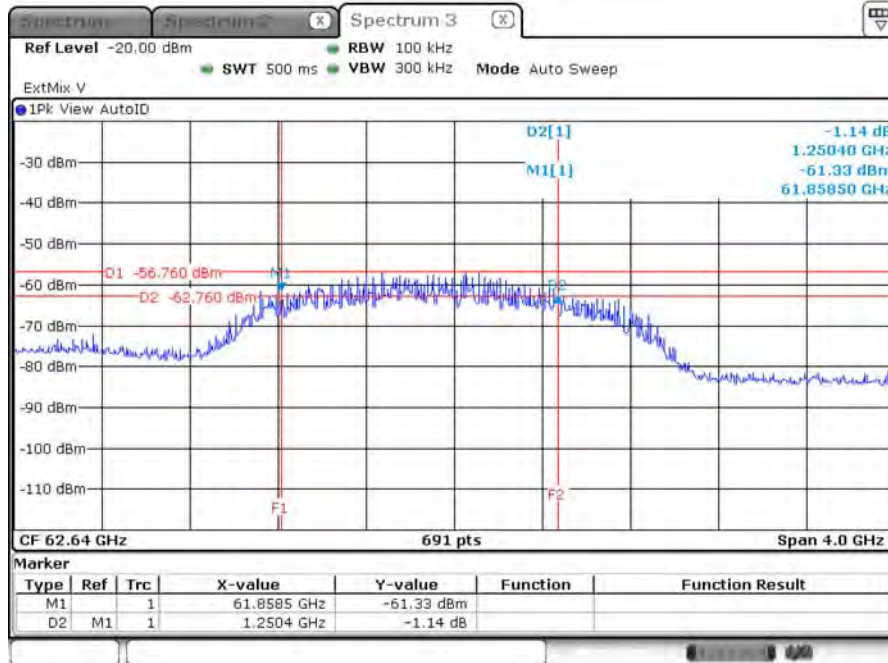

Date: 28.AUG.2018 20:09:56


Occupied Bandwidth

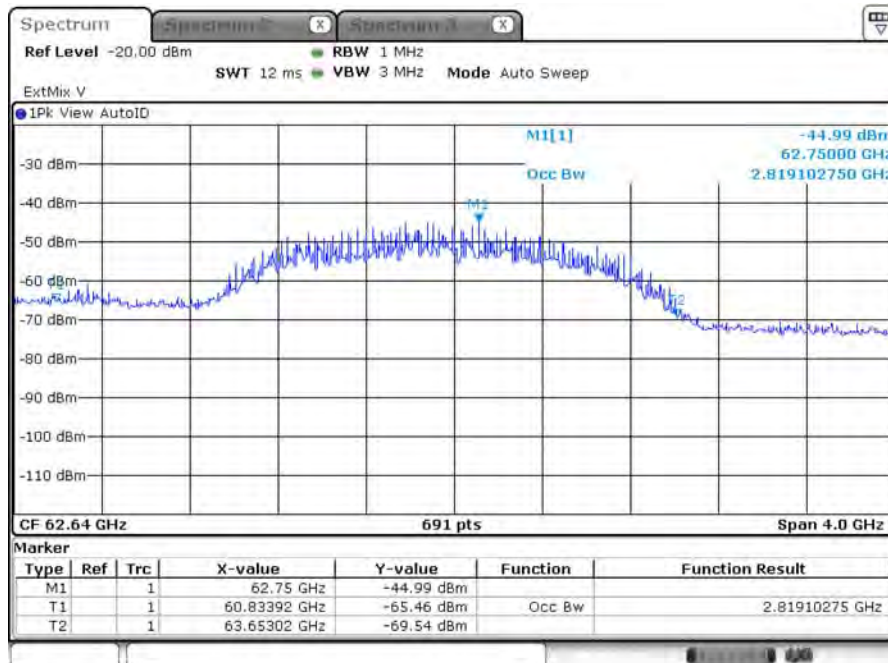

Date: 28.AUG.2018 20:12:53




26 dBc Bandwidth

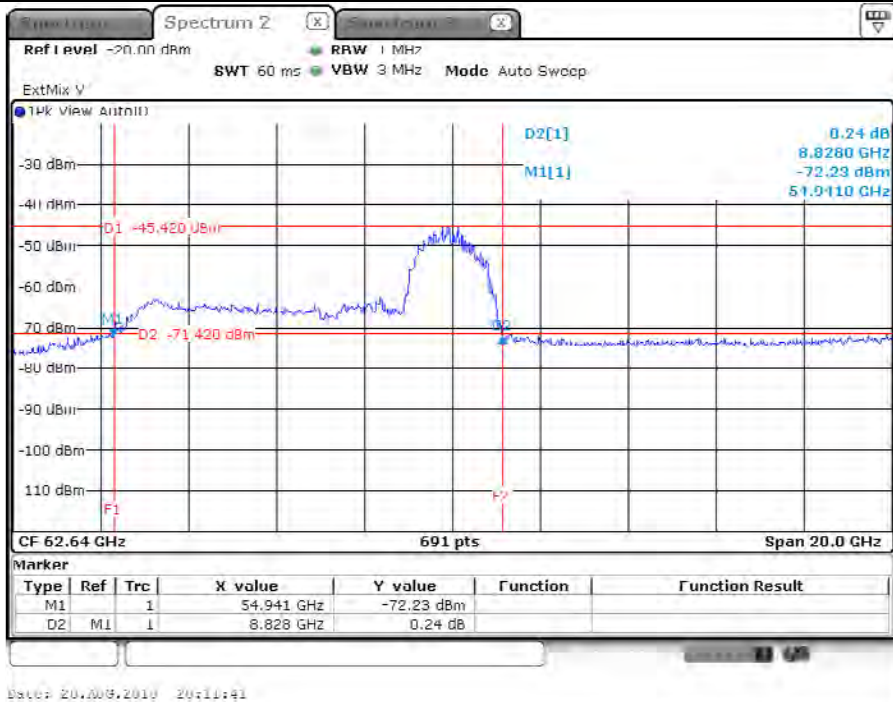




Test Frequency: 64.80 GHz

6 dBc Bandwidth

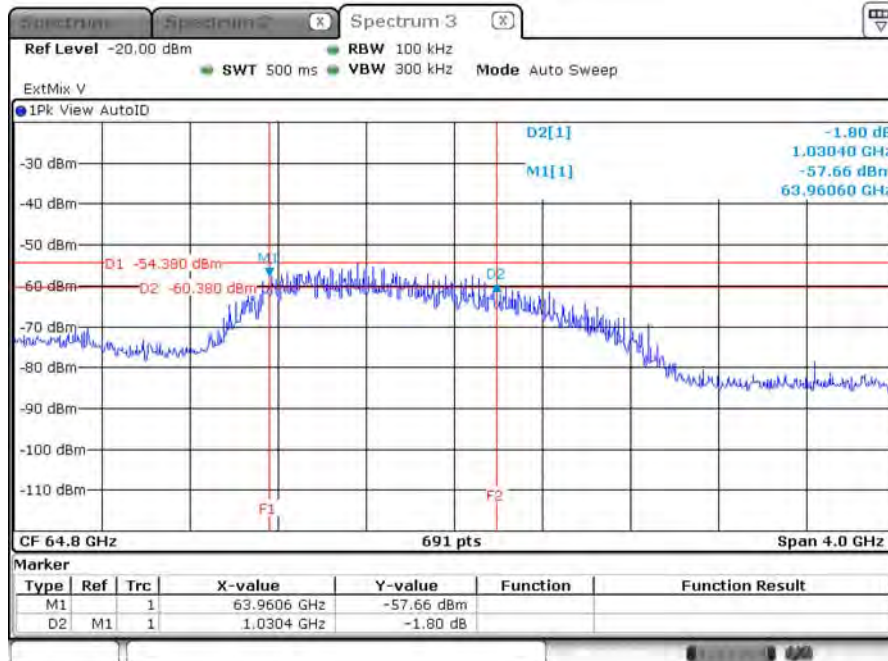

Date: 28.AUG.2018 20:19:46


Occupied Bandwidth

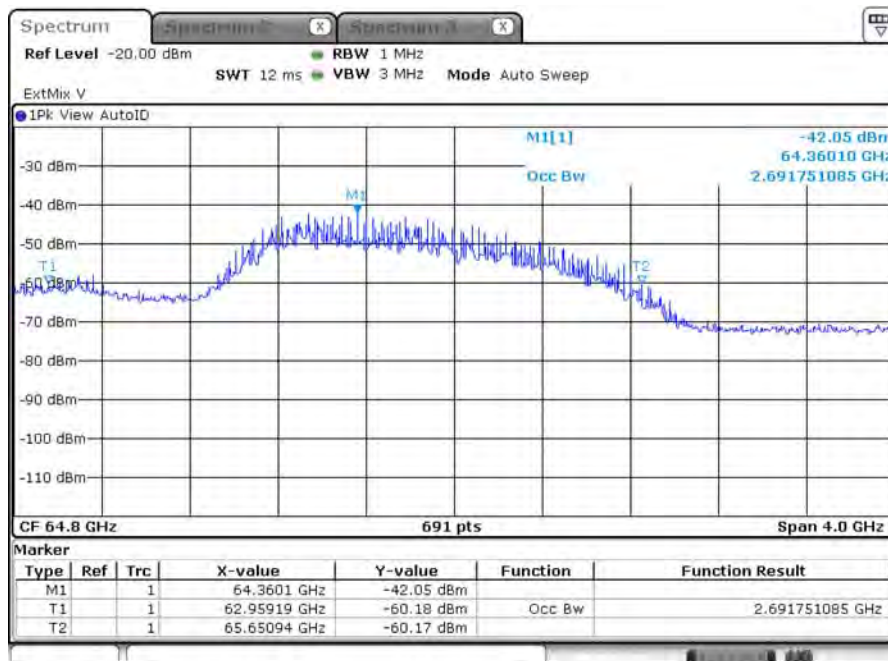

Date: 28.AUG.2018 20:15:56



26 dBc Bandwidth

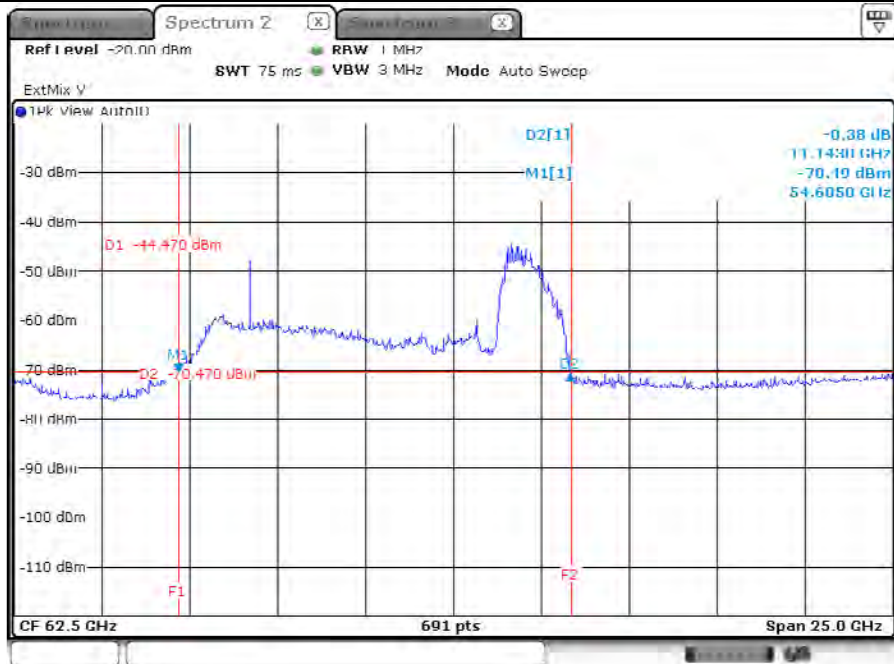



3.3 EIRP Power

3.3.1 Limit of EIRP Power

EIRP Power Limit		
Use Condition	EIRP Average Power	EIRP Peak Power
Fixed field disturbance sensors at within the frequency band 61-61.5GHz	40 dBm	43 dBm
Fixed field disturbance sensors at outside of the band 61-61.5GHz	10 dBm	13 dBm
Except fixed field disturbance sensors at 61-61.5GHz	N/A	10 dBm
Except outdoor fixed Point to Point	40 dBm	43 dBm
Outdoor fixed Point to Point	82 dBm	85 dBm

NOTE: For the applicable limit, see FCC 15.255 (c)


3.3.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.3.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013 clause 9.3 & 9.5.

3.3.4 Test Setup

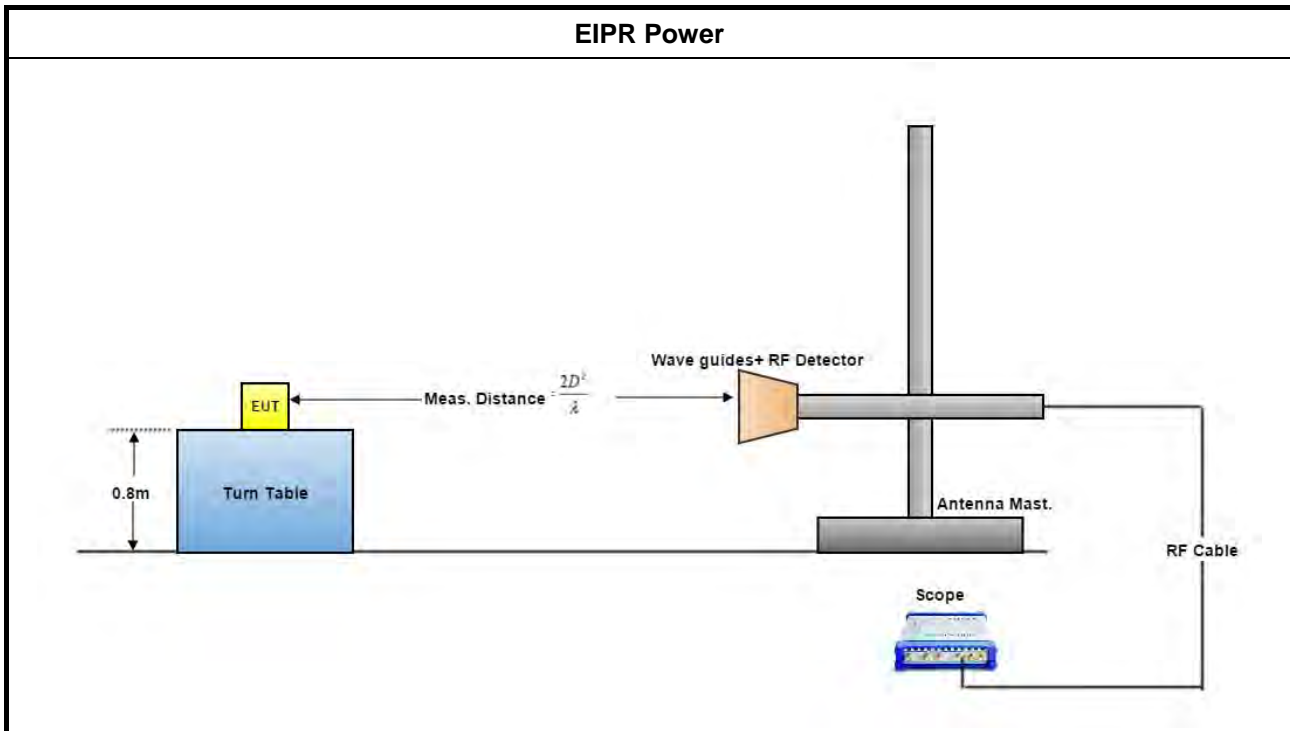

3.3.5 Test Result of EIRP Power

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.11
<p>NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.</p>	



3.3.5.1 Test Result of EIRP Power

Temp	22°C	Humidity	54%
Test Engineer	Mason Chen	Test Distance	1 m
Test Date	Jul. 28, 2018~Aug. 30, 2018		

Test Results											
Test Freq. (GHz)	Rx Gain (dBi)	DSO (mV)		Power Measured (dBm)		E _{Meas} (dBuV/m)		EIRP (dBm)		EIRP Limit (dBm) (note 1)	
		Peak	AV	Peak	AV	Peak	AV	Peak	AV	Peak	AV
58.32	23.60	146.80	36.02	-6.44	-15.95	142.53	133.02	37.73	28.22	43	40
60.48	23.60	143.60	23.30	-6.64	-17.32	142.65	131.97	37.85	27.17	43	40
62.64	23.60	98.40	12.80	-9.47	-20.51	140.12	129.08	35.32	24.28	43	40
64.80	23.60	28.10	2.20	-16.12	-28.48	133.77	121.41	28.97	16.61	43	40

The measured power level is converted to EIRP using the Friis equation:
 For radiated emissions, calculate the field strength (E) in dBμV/meter.
 $E = 126.8 - 20\log(\lambda) + P - G$
 where:
 E : is the field strength of the emission at the measurement distance, in dBμV/m
 P : is the power measured at the output of the test antenna, in dBm
 λ : is the wavelength of the emission under investigation [300/fMHz], in m
 G : is the gain of the test antenna, in dBi For radiated emissions, calculate the EIRP (dBm). If the measurement was performed in the far field, calculate the EIRP.
 $EIRP = E\text{-meas} + 20\log(d\text{-meas}) - 104.7$
 where:
 EIRP : is the equivalent isotopically radiated power, in dBm
 E-meas. : is the field strength of the emission at the measurement distance, in dBμV/m
 d-meas. : is the measurement distance, in m
 NOTE 1: For the applicable limit, see FCC 15.255 (c)
 NOTE 2: The comparison method which replaces EUT with a signal generator is used to find the correct conversion factor between “DSO(mV)” & “Power Measured(dBm)”.



3.4 Peak Conducted Power

3.4.1 Limit of Peak Conducted Power

Peak Conducted Power Limit	
6dBc Bandwidth	Peak Conducted Power (note 1)
> 100MHz	500mW
≤ 100MHz	500mW x (BW/100) (see note 2)

NOTE 1: For the applicable limit, see FCC 15.255(c)
NOTE 2: BW= 6dB bandwidth (measured at RBW 100kHz)

3.4.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.4.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.5

3.4.4 Test Result of Peak Conducted Power

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.11

NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.



3.4.4.1 Peak Conducted Power

Temp	22°C		Humidity	54%		
Test Engineer	Mason Chen					
Test Date	Jul. 28, 2018~Aug. 30, 2018					
Test Results						
Test Freq. (GHz)	EIRP (dBm)	Max. Ant. Gain (dBi)	Peak Power (dBm) (note1)	Peak Power (mW)	6dBc BW (MHz) (note2)	Peak Power Limit (mW) (note3)
58.32	37.73	12.13	25.60	363.406	1539.80	500.00
60.48	37.85	13.48	24.37	273.515	1620.80	500.00
62.64	35.32	10.56	24.76	299.544	1250.40	500.00
64.80	28.97	10.10	18.87	77.074	1030.40	500.00
<p>NOTE 1: Because EUT used for the integral antenna without temporary RF connector provided. Therefore peak conducted power is equal to EIRP power subtract the antenna gain.</p> <p>NOTE 2: For the 6dBc bandwidth, see test report clause 3.2.5.</p> <p>NOTE 3: For the applicable limit, see FCC 15.255(c)</p> <p>NOTE 4: For radiated emission measurements, calculate conducted transmitter output power P(cond)(dBm)</p> $P(\text{cond}) = \text{EIRP} - G(\text{dBi})$ <p>where:</p> <p>G(dBi) is gain of EUT antenna.</p>						



3.5 Transmitter Spurious Emissions


3.5.1 Limit of Transmitter Spurious Emissions



Frequency Range	Limit
Radiated emissions below 40 GHz	FCC 15.209
Radiated emissions above 40 GHz – 200GHz	90 pW/cm ² @ 3 m (Equivalent EIRP 102 μW, -9.91dBm)
NOTE 1: For the applicable limit, see FCC 15.255(d)	
NOTE 2: Spurious emissions shall not exceed the level of the fundamental emission.	

3.5.2 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.12

3.5.3 Test Setup

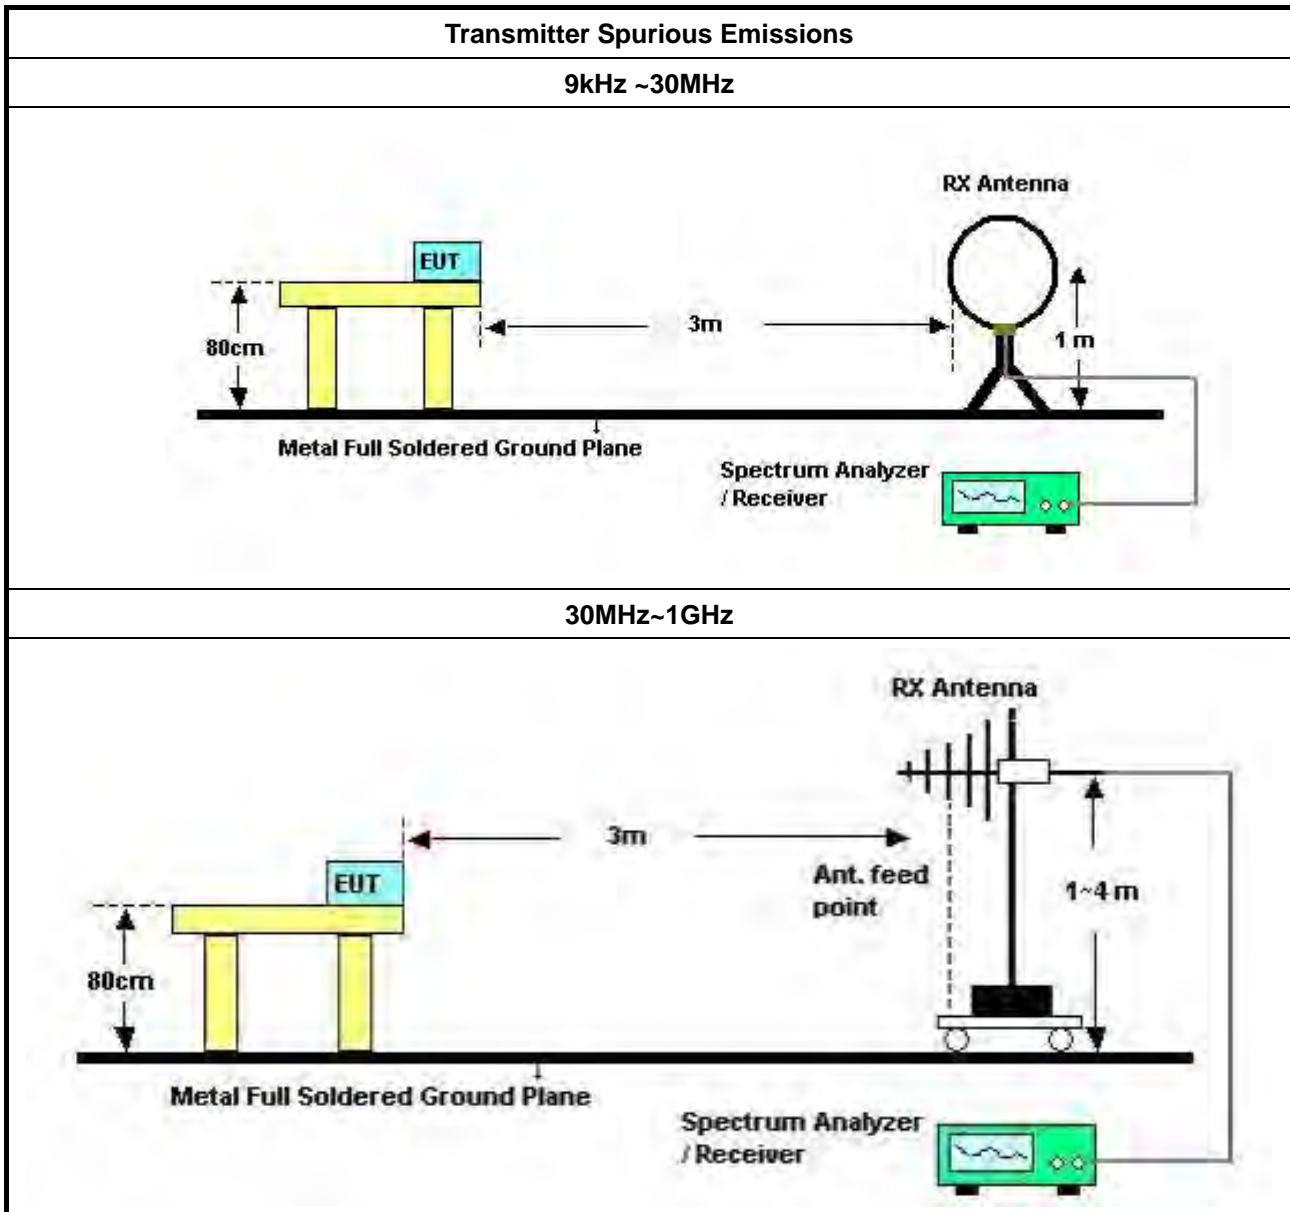

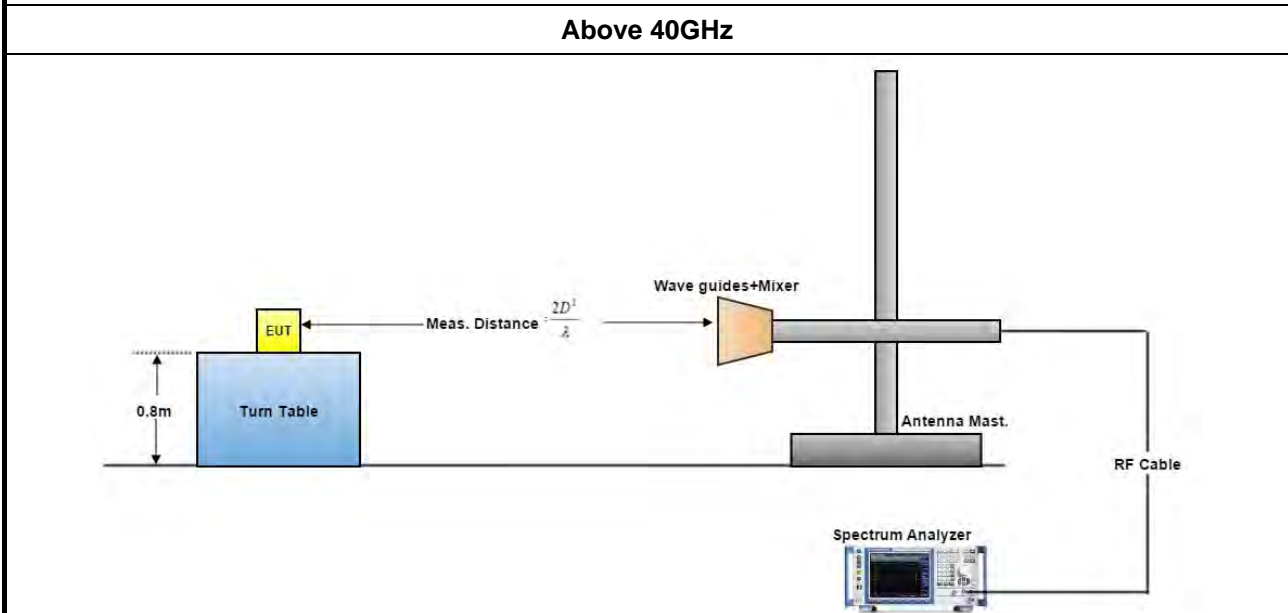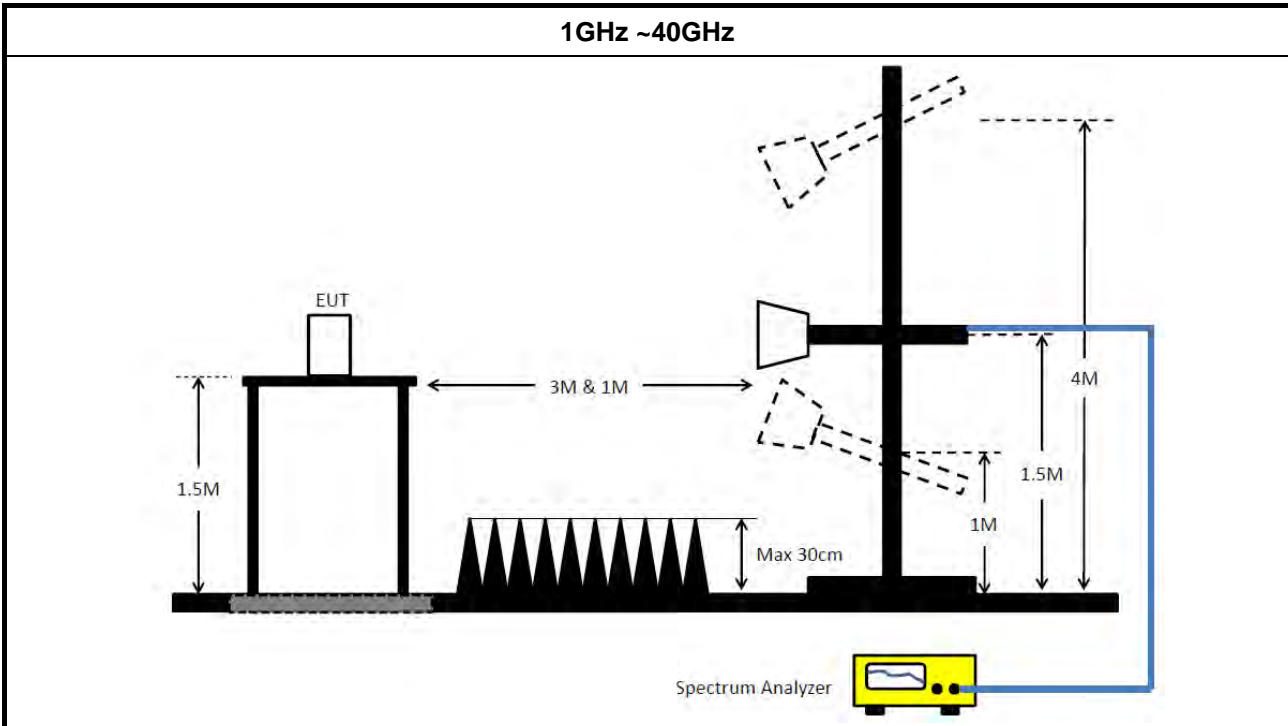

A measuring distance of at 3 m shall be used for measurements at frequencies up to 15 GHz. For frequencies above 15 GHz, any suitable measuring distance may be used. The measurement distance is chosen up to far field distance, depending on the test system noise floor for detecting spurious emission signals. Then above 15 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from spec. distance (3 m) to measurement distance. Distance extrapolation factor = 20 log (spec. distance [3 m] / measurement distance [N m]) (dB) . The measurements described in ANSI C63.10, clause 7.8.6. If the emission cannot be detected at 1 m, reduce the RBW to increase system sensitivity. Note the value. If the emission still cannot be detected, move the horn closer to the EUT, noting the distance at which a measurement is made.



3.5.4 Test Result of Transmitter Spurious Emissions

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.12 ~ 9.13
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	

3.5.4.1 Test Result of Transmitter Spurious Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.



3.5.4.2 Test Result of Transmitter Spurious Emissions

Temp	22°C	Humidity	54%
Test Engineer	Mason Chen	Test Distance	3 m
Test Range	30 MHz – 1000 MHz	Test Configuration	Normal Link


Vertical

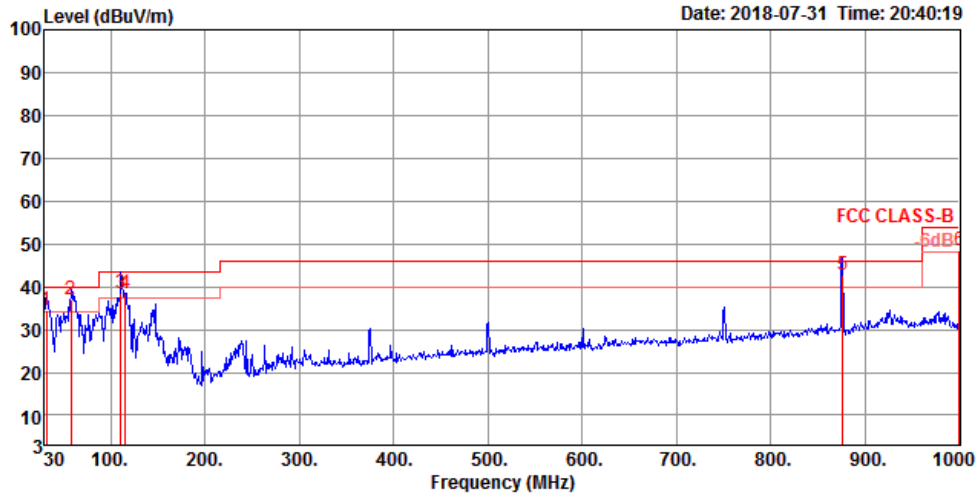

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	31.94	34.64	40.00	-5.36	40.91	0.71	24.51	31.49	100	206 QP	VERTICAL
2	58.13	36.89	40.00	-3.11	54.80	0.92	12.98	31.81	100	241 QP	VERTICAL
3	110.51	38.31	43.50	-5.19	50.69	1.27	18.22	31.87	102	151 QP	VERTICAL
4	115.36	38.58	43.50	-4.92	50.69	1.30	18.47	31.88	100	265 Peak	VERTICAL
5	875.84	42.81	46.00	-3.19	44.17	3.60	27.50	32.46	100	96 QP	VERTICAL
6	1000.00	48.31	54.00	-5.69	48.72	3.75	28.30	32.46	125	182 Peak	VERTICAL



Horizontal

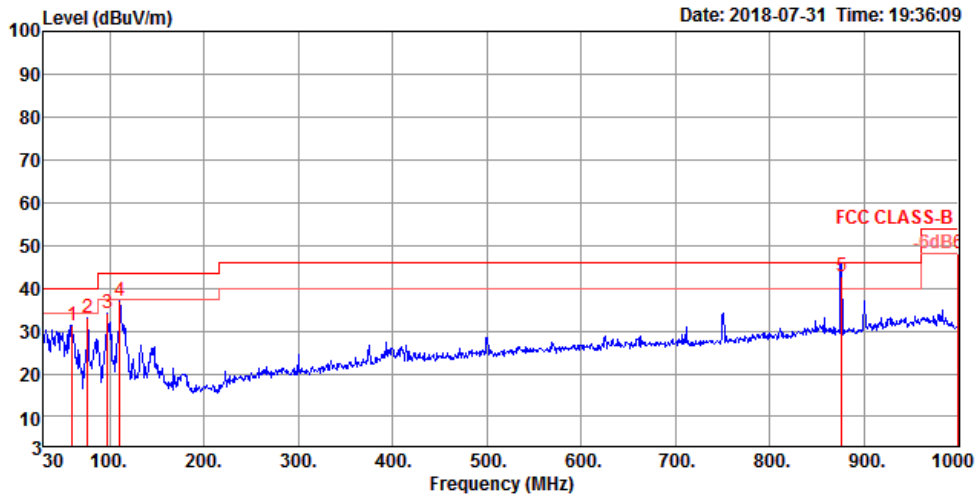

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	60.07	31.35	40.00	-8.65	49.63	0.94	12.60	31.82	100	51 Peak	HORIZONTAL
2	76.56	33.13	40.00	-6.87	50.86	1.06	13.06	31.85	200	357 Peak	HORIZONTAL
3	97.90	34.09	43.50	-9.41	48.04	1.20	16.72	31.87	150	240 Peak	HORIZONTAL
4	110.51	36.83	43.50	-6.67	49.21	1.27	18.22	31.87	125	360 Peak	HORIZONTAL
5	875.84	42.77	46.00	-3.23	44.13	3.60	27.50	32.46	100	144 QP	HORIZONTAL
6	1000.00	48.26	54.00	-5.74	48.67	3.75	28.30	32.46	100	92 Peak	HORIZONTAL



Temp	22°C	Humidity	54%
Test Engineer	Mason Chen	Test Distance	3 m
Test Range	1 GHz – 18 GHz	Test Freq. (GHz)	58.32
Test Date	Aug. 29, 2018		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7289.97	53.91	74.00	-20.09	44.18	7.42	36.95	34.64	291	49 Peak	VERTICAL
2	7290.02	48.26	54.00	-5.74	38.53	7.42	36.95	34.64	291	49 Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7289.97	50.82	54.00	-3.18	41.09	7.42	36.95	34.64	191	19 Average	HORIZONTAL
2	7290.00	56.34	74.00	-17.66	46.61	7.42	36.95	34.64	191	19 Peak	HORIZONTAL



Temp	22°C	Humidity	54%
Test Engineer	Mason Chen	Test Distance	1 m
Test Range	18 GHz – 40 GHz	Test Freq. (GHz)	58.32
Test Date	Aug. 30, 2018		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	21875.51	44.27	63.54	-19.27	40.52	15.10	38.05	49.40	132	316	Average	VERTICAL
2	21876.53	57.58	83.54	-25.96	53.83	15.10	38.05	49.40	132	316	Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	21875.34	44.25	63.54	-19.29	40.50	15.10	38.05	49.40	154	321	Average	HORIZONTAL
2	21875.81	57.50	83.54	-26.04	53.75	15.10	38.05	49.40	154	321	Peak	HORIZONTAL



Temp	22°C	Humidity	54%
Test Engineer	Mason Chen	Test Distance	3 m
Test Range	1 GHz – 18 GHz	Test Freq. (GHz)	60.48
Test Date	Aug. 29, 2018		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2399.99	41.53	54.00	-12.47	43.99	4.02	28.05	34.53	173	164	Average	VERTICAL
2	2400.00	46.11	74.00	-27.89	48.57	4.02	28.05	34.53	173	164	Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2399.99	38.85	54.00	-15.15	41.31	4.02	28.05	34.53	300	88	Average	HORIZONTAL
2	2400.10	44.66	74.00	-29.34	47.12	4.02	28.05	34.53	300	88	Peak	HORIZONTAL



Temp	22°C	Humidity	54%
Test Engineer	Mason Chen	Test Distance	1 m
Test Range	18 GHz – 40 GHz	Test Freq. (GHz)	60.48
Test Date	Aug. 30, 2018		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	26630.02	60.61	83.54	-22.93	51.36	16.68	39.42	46.85	129	138	Peak	VERTICAL
2	26630.40	47.40	63.54	-16.14	38.11	16.68	39.45	46.84	129	138	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	26625.30	60.23	83.54	-23.31	50.98	16.68	39.42	46.85	140	221	Peak	HORIZONTAL
2	26630.20	47.35	63.54	-16.19	38.06	16.68	39.45	46.84	140	221	Average	HORIZONTAL



Temp	22°C	Humidity	54%
Test Engineer	Mason Chen	Test Distance	3 m
Test Range	1 GHz – 18 GHz	Test Freq. (GHz)	62.64
Test Date	Aug. 29, 2018		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2399.96	46.04	74.00	-27.96	48.50	4.02	28.05	34.53	170	173	Peak	VERTICAL
2	2399.97	41.40	54.00	-12.60	43.86	4.02	28.05	34.53	170	173	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2399.99	39.77	54.00	-14.23	42.23	4.02	28.05	34.53	120	241	Average	HORIZONTAL
2	2400.10	45.07	74.00	-28.93	47.53	4.02	28.05	34.53	120	241	Peak	HORIZONTAL



Temp	22°C	Humidity	54%
Test Engineer	Mason Chen	Test Distance	1 m
Test Range	18 GHz – 40 GHz	Test Freq. (GHz)	62.64
Test Date	Aug. 30, 2018		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	27119.12	61.21	83.54	-22.33	51.45	16.61	39.78	46.63	137	244	Peak	VERTICAL
2	27120.93	47.76	63.54	-15.78	38.00	16.61	39.78	46.63	137	244	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	27119.49	47.79	63.54	-15.75	38.03	16.61	39.78	46.63	138	167	Average	HORIZONTAL
2	27119.95	60.59	83.54	-22.95	50.83	16.61	39.78	46.63	138	167	Peak	HORIZONTAL



Temp	22°C	Humidity	54%
Test Engineer	Mason Chen	Test Distance	3 m
Test Range	1 GHz – 18 GHz	Test Freq. (GHz)	64.80
Test Date	Aug. 29, 2018		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	8099.98	46.15	54.00	-7.85	35.82	8.09	37.10	34.86	100	334	Average	VERTICAL
2	8100.04	54.47	74.00	-19.53	44.14	8.09	37.10	34.86	100	334	Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	8099.79	54.80	74.00	-19.20	44.47	8.09	37.10	34.86	272	2	Peak	HORIZONTAL
2	8099.97	46.45	54.00	-7.55	36.12	8.09	37.10	34.86	272	2	Average	HORIZONTAL



Temp	22°C	Humidity	54%
Test Engineer	Mason Chen	Test Distance	1 m
Test Range	18 GHz – 40 GHz	Test Freq. (GHz)	64.80
Test Date	Aug. 30, 2018		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	21450.29	57.40	83.54	-26.14	54.07	15.09	37.93	49.69	136	127 Peak	VERTICAL
2	21455.49	44.04	63.54	-19.50	40.71	15.09	37.93	49.69	136	127 Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	21447.38	44.19	63.54	-19.35	40.84	15.10	37.94	49.69	146	221 Average	HORIZONTAL
2	21454.19	57.32	83.54	-26.22	53.99	15.09	37.93	49.69	146	221 Peak	HORIZONTAL



Temp	22°C	Humidity	54%
Test Engineer	Mason Chen	Test Date	Jul. 28, 2018~Aug. 30, 2018
Test Range	40GHz – 200GHz		

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
58.32	23.60	0.50	56.58	-72.72
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-34.85	3	0.29	90.00	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
60.48	23.60	0.50	55.70	-72.13
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-34.39	3	0.32	90.00	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
62.64	23.60	0.50	56.64	-73.11
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-35.23	3	0.27	90.00	PASS



Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
64.80	23.60	0.50	56.96	-48.31
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-10.38	3	81.06	90.00	PASS

Note:

$$EIRP = Prx - Grx + \text{Free Space Path Loss} = Prx - Grx + 20\text{Log}(4\pi d / \lambda)^2$$

Which

$Prx = \text{Read Level.}$

$Grx = \text{Rx Antenna Gain.}$

A distance factor is offset and the formula is $20\text{LOG}(D1/D2)$

Which

$D1 = \text{Specification Distance}$

$D2 = \text{Measurement Distance}$

3.6 Frequency Stability

3.6.1 Limit of Frequency Stability

Frequency Stability	Limit
Refer as FCC 15.255(f) and ANSI C63.10-2013, clause 9.14	within the frequency bands
Note: These measurements shall also be performed at normal and extreme test conditions.	


3.6.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.6.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 9.14.

3.6.4 Test Setup

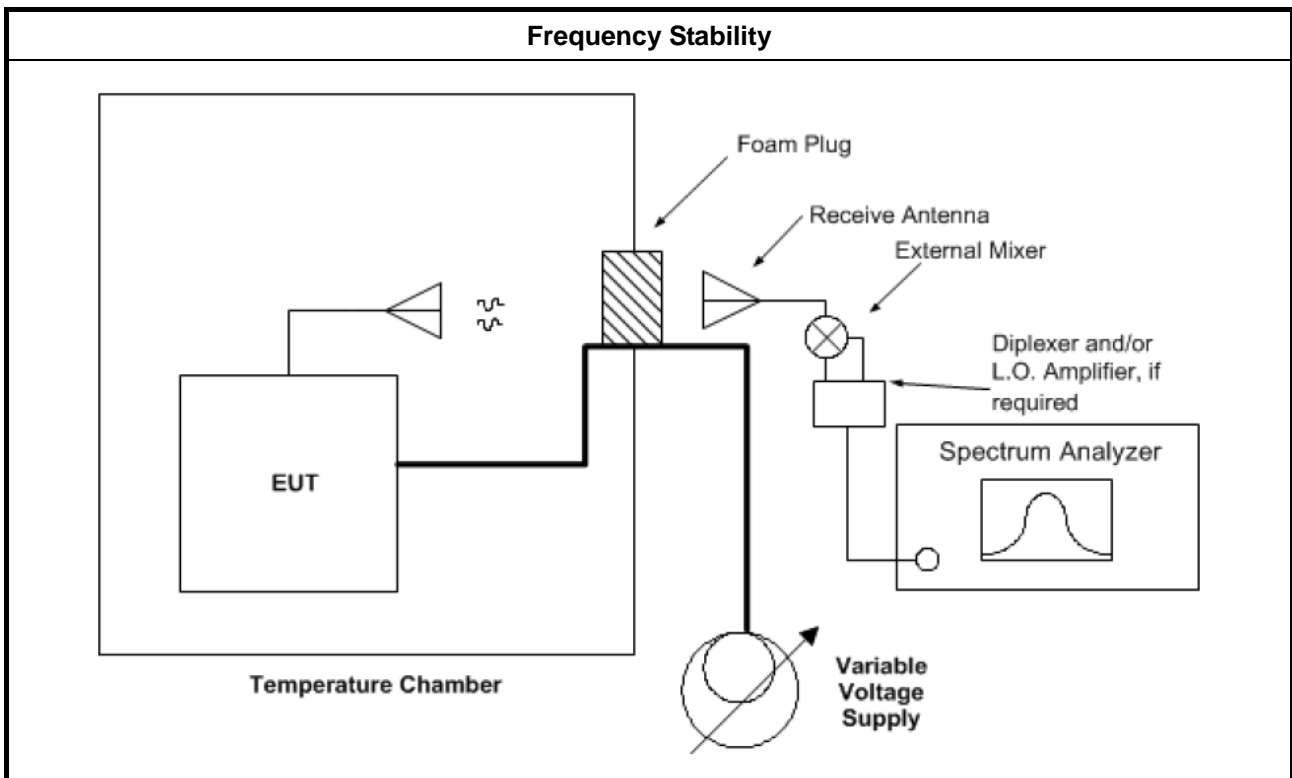



3.6.5 Test Result of Frequency Stability

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.14
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	

3.6.5.1 Frequency Stability with Respect to Ambient Temperature

Frequency Stability with Respect to Ambient Temperature			
Temp	22°C	Humidity	54%
Test Engineer	Mason Chen	Test Date	Jul. 28, 2018~Aug. 30, 2018
Test Results			
Test Temperature (°C)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
-40	60480.0087	8.70	Within band
-30	60480.0075	7.50	Within band
-20	60480.0062	6.20	Within band
-10	60480.0045	4.50	Within band
0	60480.0027	2.70	Within band
10	60480.0015	1.50	Within band
20	60480.0000	Reference	Within band
30	60480.0189	18.90	Within band
40	60480.0424	42.40	Within band
50	60480.0712	71.20	Within band
NOTE: The manufacturer's specified temperature range of -40 to 50°C.			



3.6.5.2 Frequency Stability When Varying Supply Voltage

Frequency Stability When Varying Supply Voltage			
Temp	22°C	Humidity	54%
Test Engineer	Mason Chen	Test Date	Jul. 28, 2018~Aug. 30, 2018
Test Results			
Test Voltage: (Vac)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
93.5	60480.0012	1.20	Within band
110	60480.0000	Reference	Within band
126.5	60480.0126	12.60	Within band



3.7 Operation Restriction and Group Installation

3.7.1 Limit of Operation Restriction and Group Installation

Item	Limit
Operation Restriction	Operation is not permitted for the following products: <ul style="list-style-type: none">♦ Equipment used on aircraft or satellites. (Refer as FCC 15.255 (a))♦ Field disturbance sensors, including vehicle radar systems, unless the field disturbance sensors are employed for fixed operation. (Refer as FCC 15.255 (a))
Group Installation	Operation is not permitted for the following products: <ul style="list-style-type: none">♦ External phase-locking (Refer as FCC 15.255 (h))

3.7.2 Result of Operation Restriction

Manufacturer declares that EUT will not be used on aircraft or satellites. Then user manual will include a statement to caution EUT is not permitted for use on aircraft or satellites. EUT is a wireless video area network (WVAN) for the connection of consumer electronic (CE) audio and video devices.

3.7.3 Result of Group Installation

The frequency, amplitude and phase of the transmit signal are set within the EUT. There are no external phase-locking inputs or any other means of combining two or more units together to realize a beam-forming array.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 24, 2017	Nov. 23, 2018	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 13, 2017	Nov. 12, 2018	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	Jan. 17, 2018	Jan. 16, 2019	Conduction (CO02-CB)
COND Cable	Woken	Cable	2	0.15MHz ~ 30MHz	Nov. 10, 2017	Nov. 09, 2018	Conduction (CO02-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO02-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 30, 2017	Aug. 29, 2018	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 20, 2017	Nov. 19, 2018	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 28, 2018	Jun. 27, 2019	Radiation (03CH01-CB)
Pre-Amplifier	EMCI	EMC330N	980332	20MHz ~ 3GHz	May 02, 2018	May 01, 2019	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 09, 2018	Jan. 08, 2019	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 04, 2018	Jul. 03, 2019	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 23, 2017	Nov. 22, 2018	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100354	9kHz ~ 2.75GHz	Dec. 08, 2017	Dec. 07, 2018	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 11, 2017	Oct. 10, 2018	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 11, 2017	Oct. 10, 2018	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 11, 2017	Oct. 10, 2018	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Oct. 11, 2017	Oct. 10, 2018	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Oct. 11, 2017	Oct. 10, 2018	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2018	Mar. 15, 2019	Radiation (03CH01-CB)
Mixer	OML	M19HW/A	U91113-1	40 ~ 60 GHz	Oct. 12, 2017	Oct. 11, 2018	Radiation (03CH01-CB)
Mixer	OML	M15HW/A	V91113-1	50 ~ 75 GHz	Oct. 12, 2017	Oct. 11, 2018	Radiation (03CH01-CB)
Mixer	OML	M12HW/A	E91113-1	60 ~ 90 GHz	Oct. 12, 2017	Oct. 11, 2018	Radiation (03CH01-CB)
Mixer	OML	M08HW/A	F91113-1	90 ~ 140 GHz	Oct. 12, 2017	Oct. 11, 2018	Radiation (03CH01-CB)
Mixer	OML	M05HW/A	G91113-1	140 ~ 220 GHz	Oct. 12, 2017	Oct. 11, 2018	Radiation (03CH01-CB)
*Detector	Millitech	DET-15-RPFW 0	#A18185(074)	50 ~ 75 GHz	Jan. 29, 2018	Jan. 29, 2020	Radiation (03CH01-CB)
Pico Scope	Pico	Pico Scope 6402C	CX372/002	N/A	Jul. 13, 2018	Jul. 12, 2019	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M19RH	U91113-A	40 ~ 60 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M15RH	V91113-A	50 ~ 75 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M12RH	E91113-A	60 ~ 90 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M08RH	F91113-A	90 ~ 140 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M05RH	G91113-A	140 ~ 220 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 01, 2018	May 31, 2019	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“**” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.



5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Radiated Emission (40GHz ~ 220GHz)	4.7 dB	Confidence levels of 95%
Temperature	0.7°C	Confidence levels of 95%