



# FCC RADIO TEST REPORT

**FCC ID** : TV7WAPG60ADM  
**Equipment** : wAPG60adM  
**Brand Name** : MikroTik  
**Model Name** : wAPG60adM  
**Applicant** : Mikrotikls SIA  
Brivibas gatve 214i, Riga, LV-1039 Latvia  
**Manufacturer** : MIKROTIKLS SIA  
Brivibas gatve 214i, Riga, LV-1039 Latvia  
**Standard** : 47 CFR FCC Part 15.255

The product was received on Nov. 15, 2018, and testing was started from Nov. 17, 2018 and completed on Feb. 13, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013, 47 CFR FCC Part 15.255 and Millimeter Wave Test Procedures and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

  
Approved by: Cliff Chang

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



# Table of Contents

**History of this test report.....3**

**Summary of Test Result.....4**

**1 General Description .....5**

1.1 Information.....5

1.2 Applicable Standards .....7

1.3 Testing Location .....7

**2 Test Configuration of Equipment under Test.....8**

2.1 Test Channel Frequencies .....8

2.2 Conformance Tests and Related Test Frequencies.....8

2.3 EUT Operation during Test .....9

2.4 Accessories .....10

2.5 Support Equipment.....10

2.6 Far Field Boundary Calculations .....10

2.7 Test Setup Diagram .....11

**3 Transmitter Test Result .....13**

3.1 AC Power Conducted Emissions .....13

3.2 Occupied Bandwidth .....18

3.3 EIRP Power.....24

3.4 Peak Conducted Power.....27

3.5 Transmitter Spurious Emissions.....29

3.6 Frequency Stability.....43

3.7 Operation Restriction and Group Installation .....46

**4 Test Equipment and Calibration Data .....47**

**5 Measurement Uncertainty .....49**

## Appendix A. Test Photos

### Photographs of EUT v01



## History of this test report

Report No.	Version	Description	Issued Date
FR8N1405	01	Initial issue of report	Aug. 23, 2019



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	FCC 15.207	AC Power Conducted Emissions	PASS	-
3.2	FCC 15.255(e)	Occupied Bandwidth	PASS	-
3.3	FCC 15.255(c)	EIRP Power	PASS	-
3.4	FCC 15.255(c)	Peak Conducted Power	PASS	-
3.5	FCC 15.255(d)	Transmitter Spurious Emissions	PASS	-
3.6	FCC 15.255(f)	Frequency Stability	PASS	-
3.7	FCC 15.255(a),(h)	Operation Restriction and Group Installation	PASS	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Cliff Chang**

**Report Producer: Vicky Huang**



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

RF General Information	
Frequency Range	57-71 GHz
The Channel Plan(s)	Channel 1: 58.32 GHz Channel 2: 60.48 GHz Channel 3: 62.64 GHz

### 1.1.2 Modulation

#### IEEE 802.11ad Modulation Scheme

MCS Index	Modulation	Code rate	Data rate (Mbit/s)
0	$\pi/2$ -BPSK	1/2	27.5
1	$\pi/2$ -BPSK	1/2	385
2	$\pi/2$ -BPSK	1/2	770
3	$\pi/2$ -BPSK	5/8	962.5
4	$\pi/2$ -BPSK	3/4	1155
5	$\pi/2$ -BPSK	13/16	1251.25
6	$\pi/2$ -QPSK	1/2	1540
7	$\pi/2$ -QPSK	5/8	1925
8	$\pi/2$ -QPSK	3/4	2310
9	$\pi/2$ -QPSK	13/16	2502.5
10	$\pi/2$ -16QAM	1/2	3080
11	$\pi/2$ -16QAM	5/8	3850
12	$\pi/2$ -16QAM	3/4	4620
12.1	$\pi/2$ -16QAM	13/16	5005

### 1.1.3 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		
					Channel 1	Channel 2	Channel 3
1	N/A	N/A	PCB Antenna	N/A	12.13	13.48	10.56

Note: The above information was declared by manufacturer.



### 1.1.4 Operating Conditions

Operating Conditions	
<input checked="" type="checkbox"/> -30 °C to +50 °C	
<input type="checkbox"/> 0 °C to +40 °C	
<input type="checkbox"/> Other:	
EUT Power Type	From Host System

### 1.1.5 Equipment Use Condition

Equipment Use Condition
<input type="checkbox"/> Fixed field disturbance sensors at 61-61.5GHz
<input type="checkbox"/> Except fixed field disturbance sensors at 61-61.5GHz
<input checked="" type="checkbox"/> Except fixed field disturbance sensors

### 1.1.6 User Condition

Intended Operation
<input checked="" type="checkbox"/> Indoor & Outdoor (fixed Point to Point & Point-to-multipoint)

Note: The above information was declared by manufacturer.

### 1.1.7 Duty Cycle

Duty Cycle	Duty Cycle Factor (dB)
100 %	0



### 1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.255
- ♦ ANSI C63.10-2013 Section 9. "Procedures for testing millimeter-wave systems"

### 1.3 Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO02-CB	Max Lin	23°C / 54%	Feb. 13, 2019
Radiated	03CH01-CB	Justin Lin	21~23°C / 54~57%	Nov. 17, 2018~Nov. 29, 2018
RF Conducted	TH01-CB	Gino Huang	22~23°C / 54~56%	Nov. 17, 2018~Nov. 28, 2018

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086B with Industry Canada.



## 2 Test Configuration of Equipment under Test

### 2.1 Test Channel Frequencies

Test Channel Frequencies Configuration	
Channel 1 (GHz)	58.32
Channel 2 (GHz)	60.48
Channel 3 (GHz)	62.64

### 2.2 Conformance Tests and Related Test Frequencies

Test Item	Test Frequencies (GHz)
AC Power Conducted Emissions	Normal Link-Random Frequency
Occupied Bandwidth	58.32, 60.48, 62.64
EIRP Power	58.32, 60.48, 62.64
Peak Conducted Power	58.32, 60.48, 62.64
Transmitter Spurious Emissions (below 1 GHz)	CTX-60.48
Transmitter Spurious Emissions (1 GHz-40 GHz)	58.32, 60.48, 62.64
Transmitter Spurious Emissions (above 40 GHz)	58.32, 60.48, 62.64
Frequency Stability	60.48

Note1: The EUT is a limited module which only limited to the host (Brand Name: MikroTik / Model No.: RBwAPG-60ad-SA, RBwAPG-60ad).

Note2: The EUT was installed to the host (Brand Name: MikroTik / Model No.: RBwAPG-60ad-SA) to perform all the tests.

The following test modes were performed for all tests:

For AC Power Conducted Emissions test:

Mode 1: EUT + Adapter

Mode 2: EUT + PoE

Mode 1 generated the worst test result, so it was recorded in this report.

For Transmitter Spurious Emissions (below 1 GHz) test:

The EUT was performed at Z axis and Y axis position for Transmitter Spurious Emissions (above 1GHz) test, and the worst case was found at Y axis. So the measurement will follow this same test configuration.

Mode 1: EUT Y-axis + Adapter

Mode 2: EUT Y-axis + PoE

Mode 1 generated the worst test result, so it was recorded in this report.





For Transmitter Spurious Emissions (above 1GHz) test:

The EUT was performed at Z axis and Y axis position, and the worst case was found at Y axis. So the measurement will follow this same test configuration.

Mode 1: EUT Y-axis

### **2.3 EUT Operation during Test**

For CTX:

During the test, executed the test program to control the EUT continuously transmit RF signal.

For Normal Link:

During the test, the EUT operation to normal function.



### 2.4 Accessories

N/A

### 2.5 Support Equipment

For AC Conduction test:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	RouterBOARD wAP G-60ad-SA	MikroTik	RBwAPG-60ad-SA	N/A
B	NB	DELL	E6430	N/A
C	LAN NB	DELL	E6430	N/A
D	Adapter	FULLPOWER	SAW30-240-0800U A	N/A
E	RouterBOARD wAP G-60ad-SA	MikroTik	RBwAPG-60ad-SA	N/A

For Radiated and RF Conducted tests:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Adapter	FULLPOWER	SAW30-240-0800U A	N/A
B	RouterBOARD wAP G-60ad-SA	MikroTik	RBwAPG-60ad-SA	N/A

### 2.6 Far Field Boundary Calculations

The far-field boundary is given as:

$$\text{far field} = (2 * L^2) / \lambda$$


where:

L = Largest Antenna Dimension, including the reflector, in meters

λ= wavelength in meters


Far Field (m)				
Frequency (GHz)	L (m)	Lambda (m)	d(Far Field) (m)	d(Far Field) (cm)
58.32	0.04	0.0051440	0.622	62.21
60.48	0.04	0.0049603	0.645	64.51
62.64	0.04	0.0047893	0.668	66.82

## 2.7 Test Setup Diagram

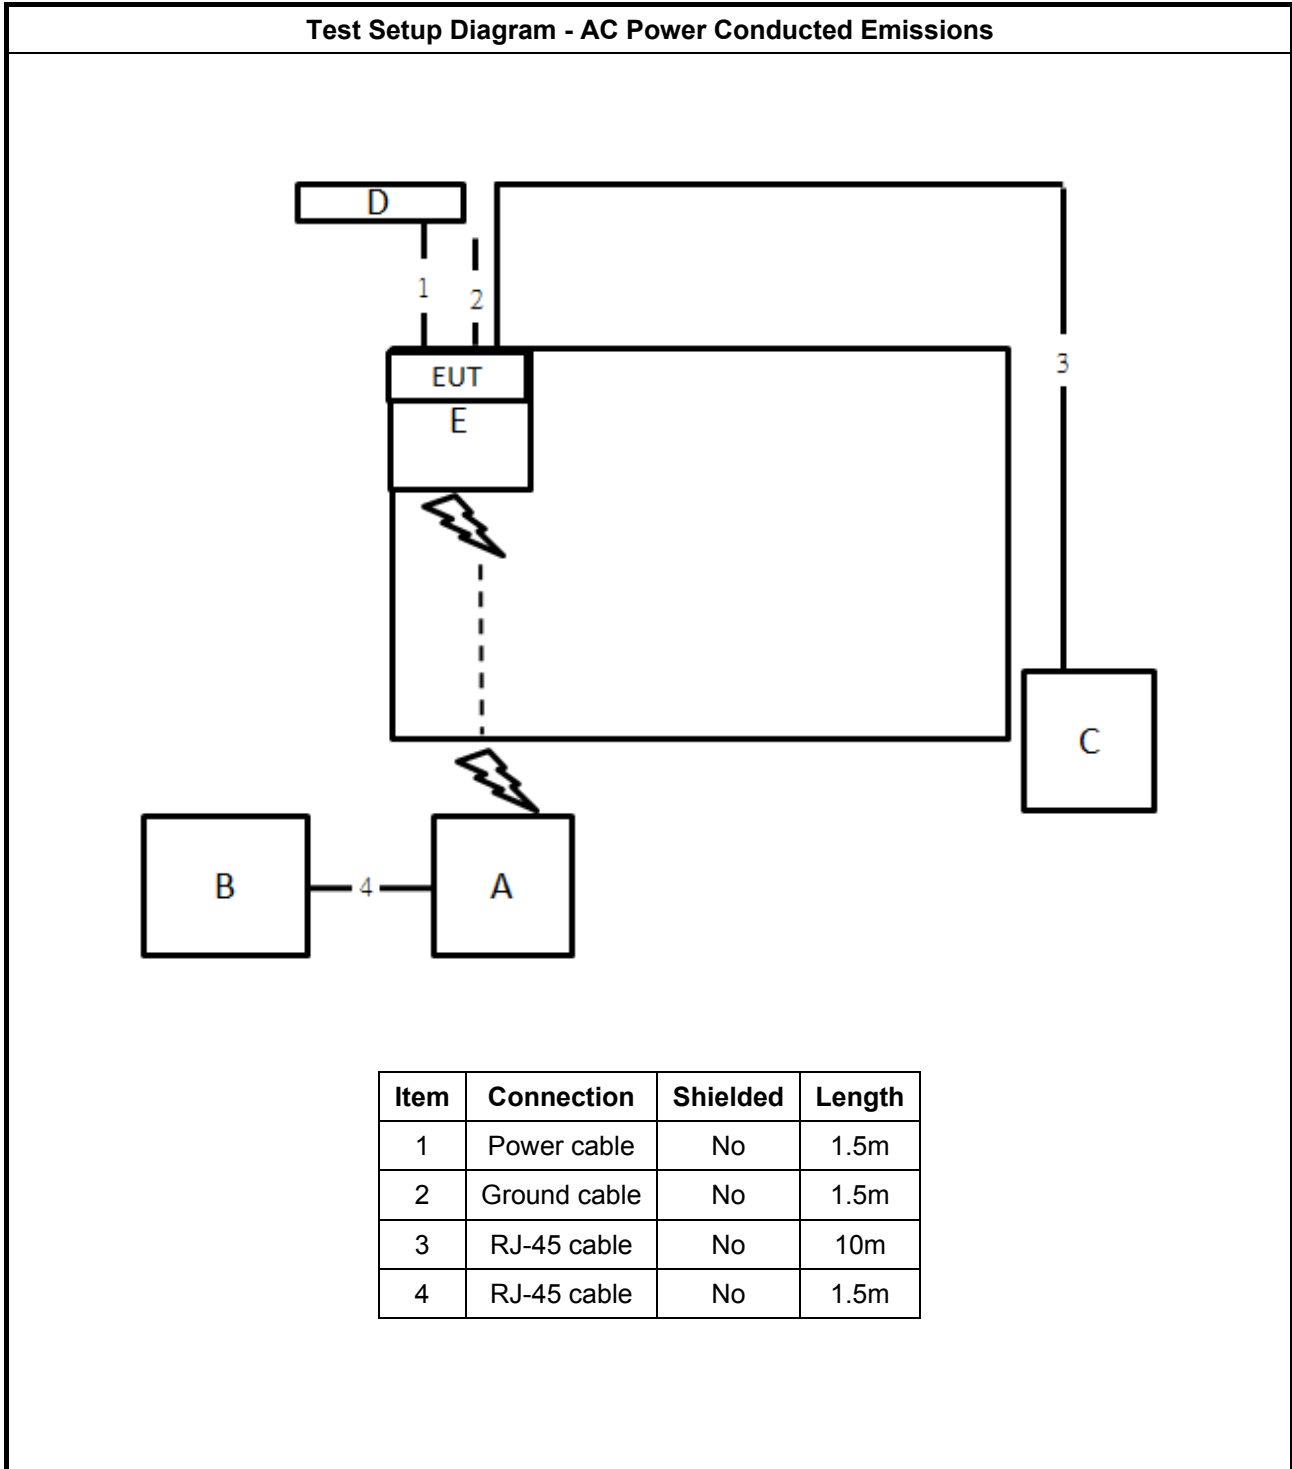



Test Setup Diagram - Transmitter Spurious Emissions

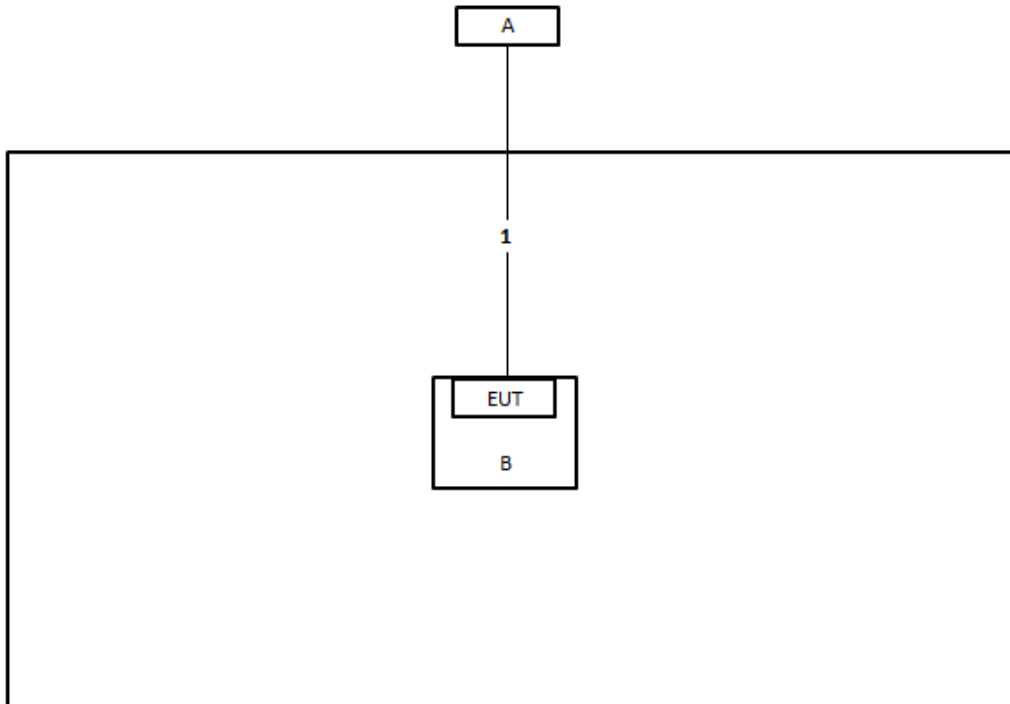

Item	Connection	Shielded	Length
1	Power cable	No	1.5m



### 3 Transmitter Test Result

#### 3.1 AC Power Conducted Emissions

##### 3.1.1 Limit of AC Power Conducted Emissions

AC Power Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a measuring instruments list in this test report.

##### 3.1.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 6.2.

### 3.1.4 Test Setup

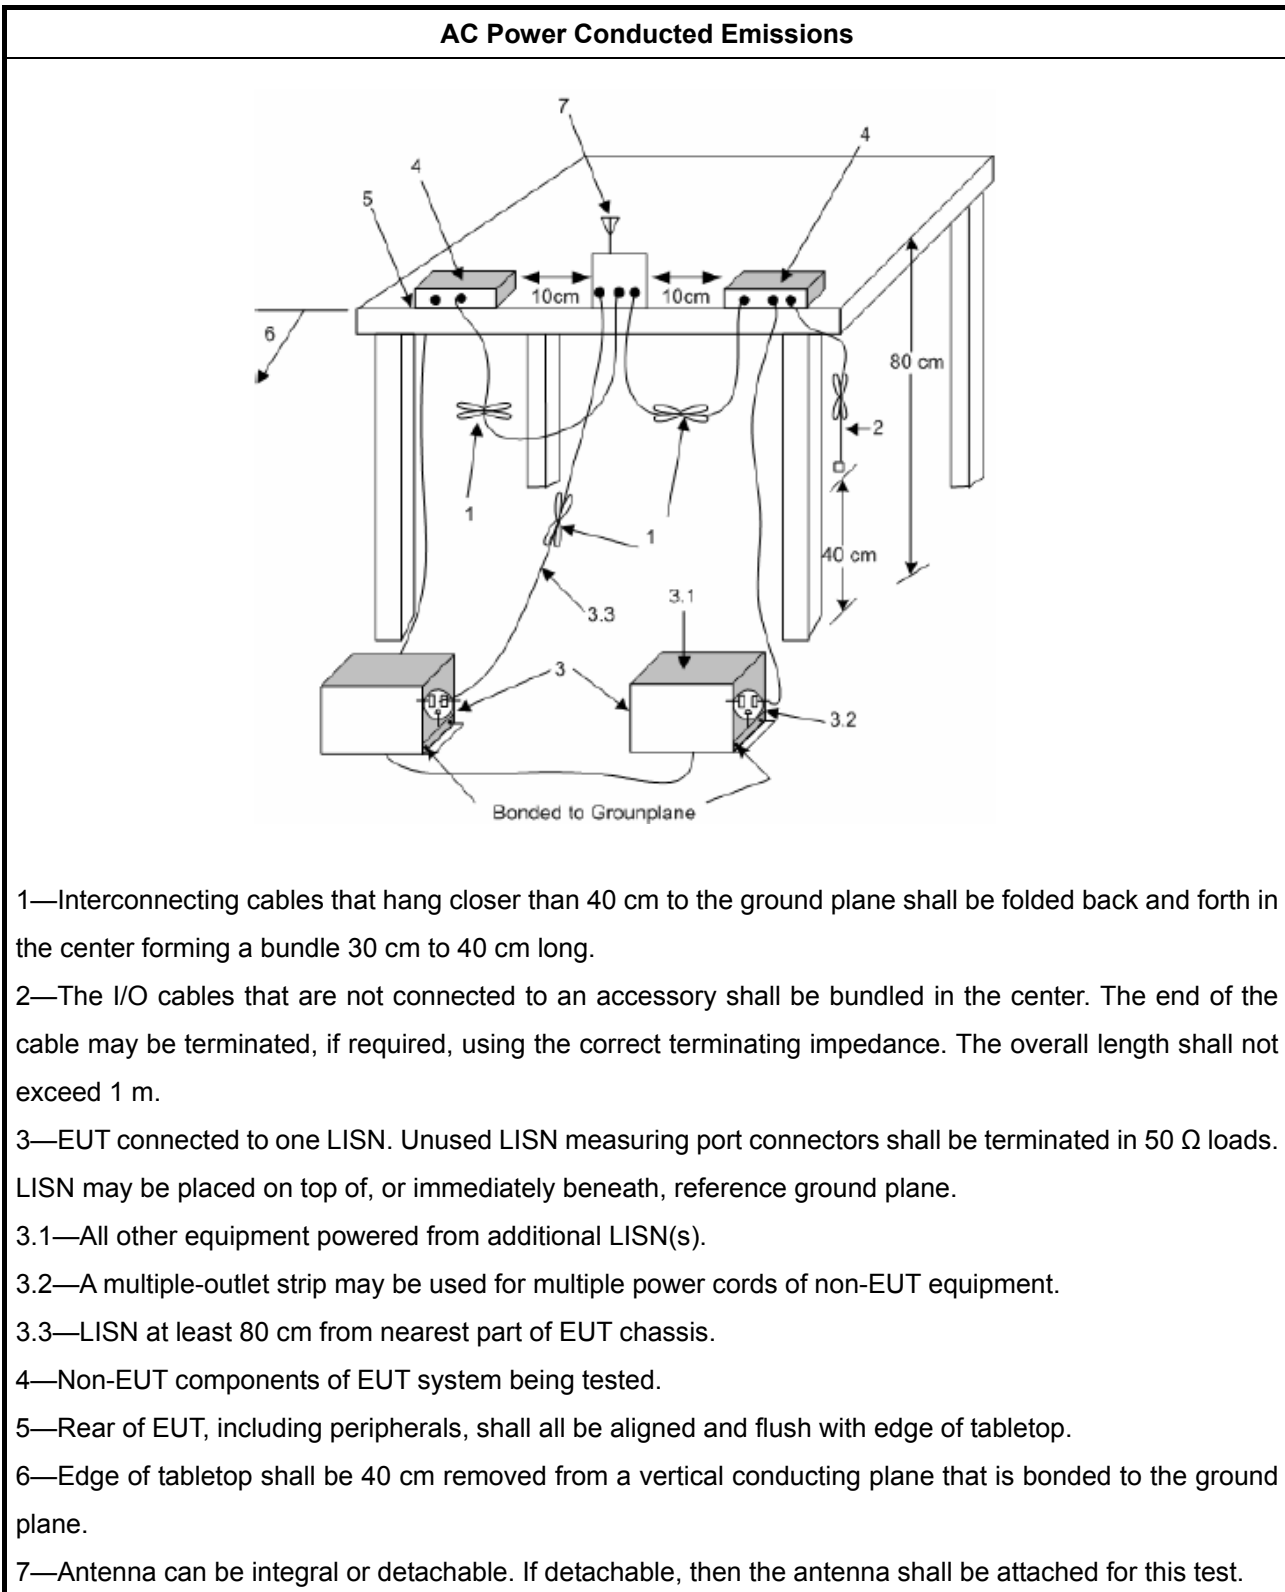




### 3.1.5 Test Result of AC Power Conducted Emissions

<b>Test Conditions</b>	see ANSI C63.10, clause 5.11
<b>Test Setup</b>	see ANSI C63.10, clause 6.2.3
<p>NOTE 1: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes. If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.12 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing.</p> <p>NOTE 2: "&gt;20dB" means the tables in this clause should only list values of spurious emissions that exceed the level of 20 dB below the applicable limit, see ANSI C63.4, clause 10.1.8.1.</p>	



Phase	Line	Configuration	Normal Link
Test Mode	Mode 1		

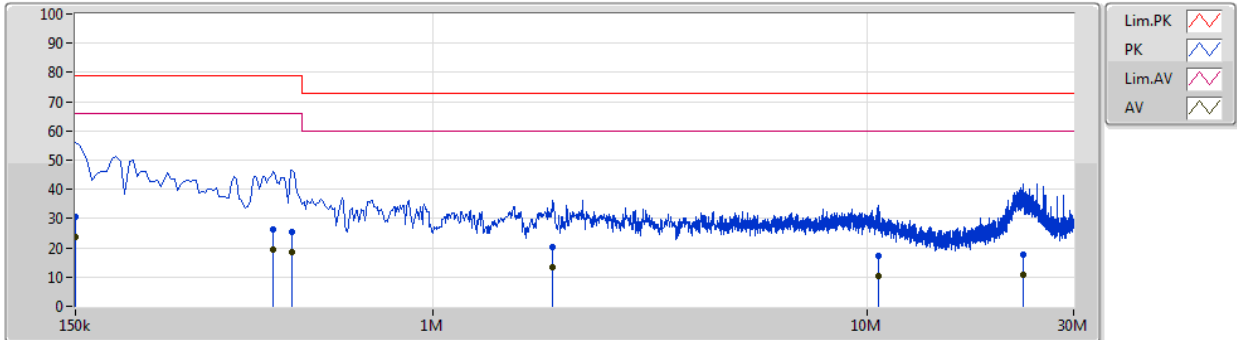


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)
QP	150k	30.52	79.00	-48.48	10.17	Line	-	20.35	0.05	0.02	10.10
AV	150k	23.87	66.00	-42.13	10.17	Line	"Worst"	13.70	0.05	0.02	10.10
QP	429k	26.17	79.00	-52.83	10.18	Line	-	15.99	0.06	0.02	10.10
AV	429k	19.41	66.00	-46.59	10.18	Line	-	9.23	0.06	0.02	10.10
QP	474k	25.45	79.00	-53.55	10.18	Line	-	15.27	0.06	0.02	10.10
AV	474k	18.65	66.00	-47.35	10.18	Line	-	8.47	0.06	0.02	10.10
QP	1.883M	20.28	73.00	-52.72	10.24	Line	-	10.04	0.09	0.05	10.10
AV	1.883M	13.45	60.00	-46.55	10.24	Line	-	3.21	0.09	0.05	10.10
QP	10.662M	17.41	73.00	-55.59	10.40	Line	-	7.01	0.21	0.08	10.11
AV	10.662M	10.56	60.00	-49.44	10.40	Line	-	0.16	0.21	0.08	10.11
QP	22.925M	17.56	73.00	-55.44	10.60	Line	-	6.96	0.31	0.17	10.12
AV	22.925M	10.64	60.00	-49.36	10.60	Line	-	0.04	0.31	0.17	10.12





Phase	Neutral	Configuration	Normal Link
Test Mode	Mode 1		

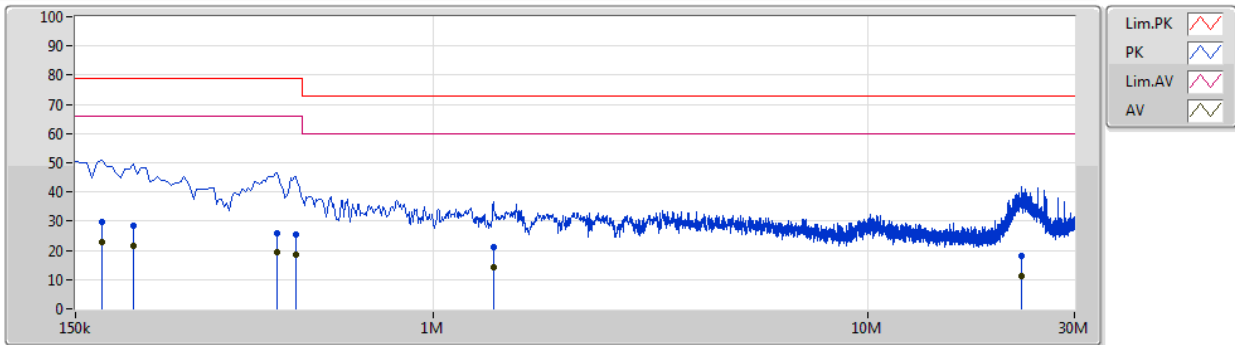

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)
QP	172.5k	29.57	79.00	-49.43	10.15	Neutral	-	19.42	0.03	0.02	10.10
AV	172.5k	22.74	66.00	-43.26	10.15	Neutral	"Worst"	12.59	0.03	0.02	10.10
QP	204k	28.31	79.00	-50.69	10.15	Neutral	-	18.16	0.03	0.02	10.10
AV	204k	21.57	66.00	-44.43	10.15	Neutral	-	11.42	0.03	0.02	10.10
QP	438k	26.06	79.00	-52.94	10.16	Neutral	-	15.90	0.04	0.02	10.10
AV	438k	19.31	66.00	-46.69	10.16	Neutral	-	9.15	0.04	0.02	10.10
QP	483k	25.33	79.00	-53.67	10.16	Neutral	-	15.17	0.04	0.02	10.10
AV	483k	18.45	66.00	-47.55	10.16	Neutral	-	8.29	0.04	0.02	10.10
QP	1.379M	21.24	73.00	-51.76	10.18	Neutral	-	11.06	0.05	0.03	10.10
AV	1.379M	14.35	60.00	-45.65	10.18	Neutral	-	4.17	0.05	0.03	10.10
QP	22.673M	18.14	73.00	-54.86	10.54	Neutral	-	7.60	0.25	0.17	10.12
AV	22.673M	11.26	60.00	-48.74	10.54	Neutral	-	0.72	0.25	0.17	10.12



### 3.2 Occupied Bandwidth

#### 3.2.1 Limit of Occupied Bandwidth

<b>6dBc Bandwidth</b> (see Note 1)	None
<b>99% Occupied Bandwidth</b> (see Note 2)	None

NOTE 1: The 6dBc bandwidth is the frequency bandwidth of the signal power at the -6 dBc points when measured with a 100 kHz resolution bandwidth. These measurements shall also be performed at normal test conditions.

NOTE 2: The 99% occupied bandwidth is the frequency bandwidth of the signal power at the 99% channel power of occupied bandwidth when resolution bandwidth should be approximately 1 % to 5 % of the occupied bandwidth (OBW). These measurements shall also be performed at normal test conditions.


#### 3.2.2 Measuring Instruments

Refer a measuring instruments list in this test report.

#### 3.2.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 6.9.2.

### 3.2.4 Test Setup

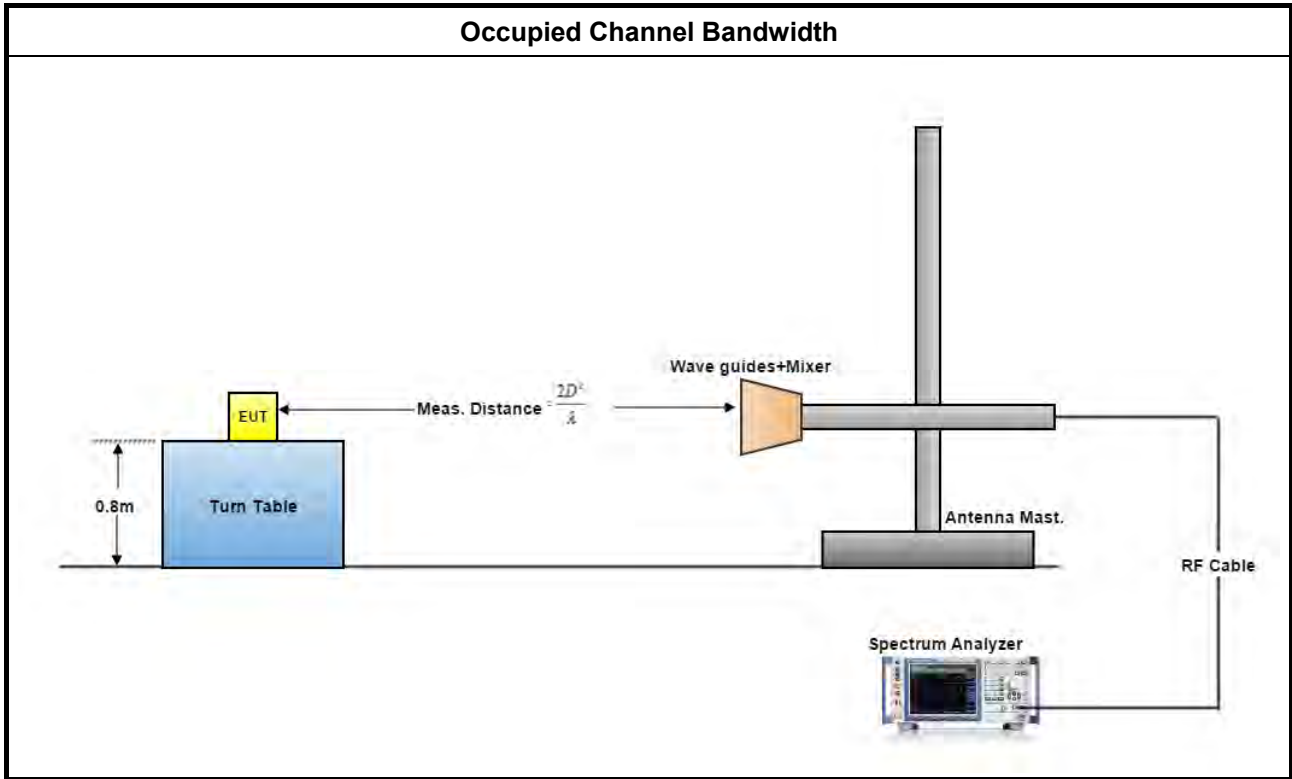




### 3.2.5 Test Result of Occupied Bandwidth

<b>Test Conditions</b>	see ANSI C63.10, clause 5.11
<b>Test Setup</b>	see ANSI C63.10, clause 6.9.2
NOTE: If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing. Refer as ANSI C63.10, clause 15, observe and record with plotted graphs or photographs the worst-case (i.e., widest) occupied bandwidth produced by these different modulation sources.	

Test Results			
Test Freq. (GHz)	6 dBc Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)
58.32	1758.30	2518.08	N/A
60.48	1693.20	2130.24	N/A
62.64	962.40	2772.79	N/A




### 3.2.5.1 Bandwidth Plots

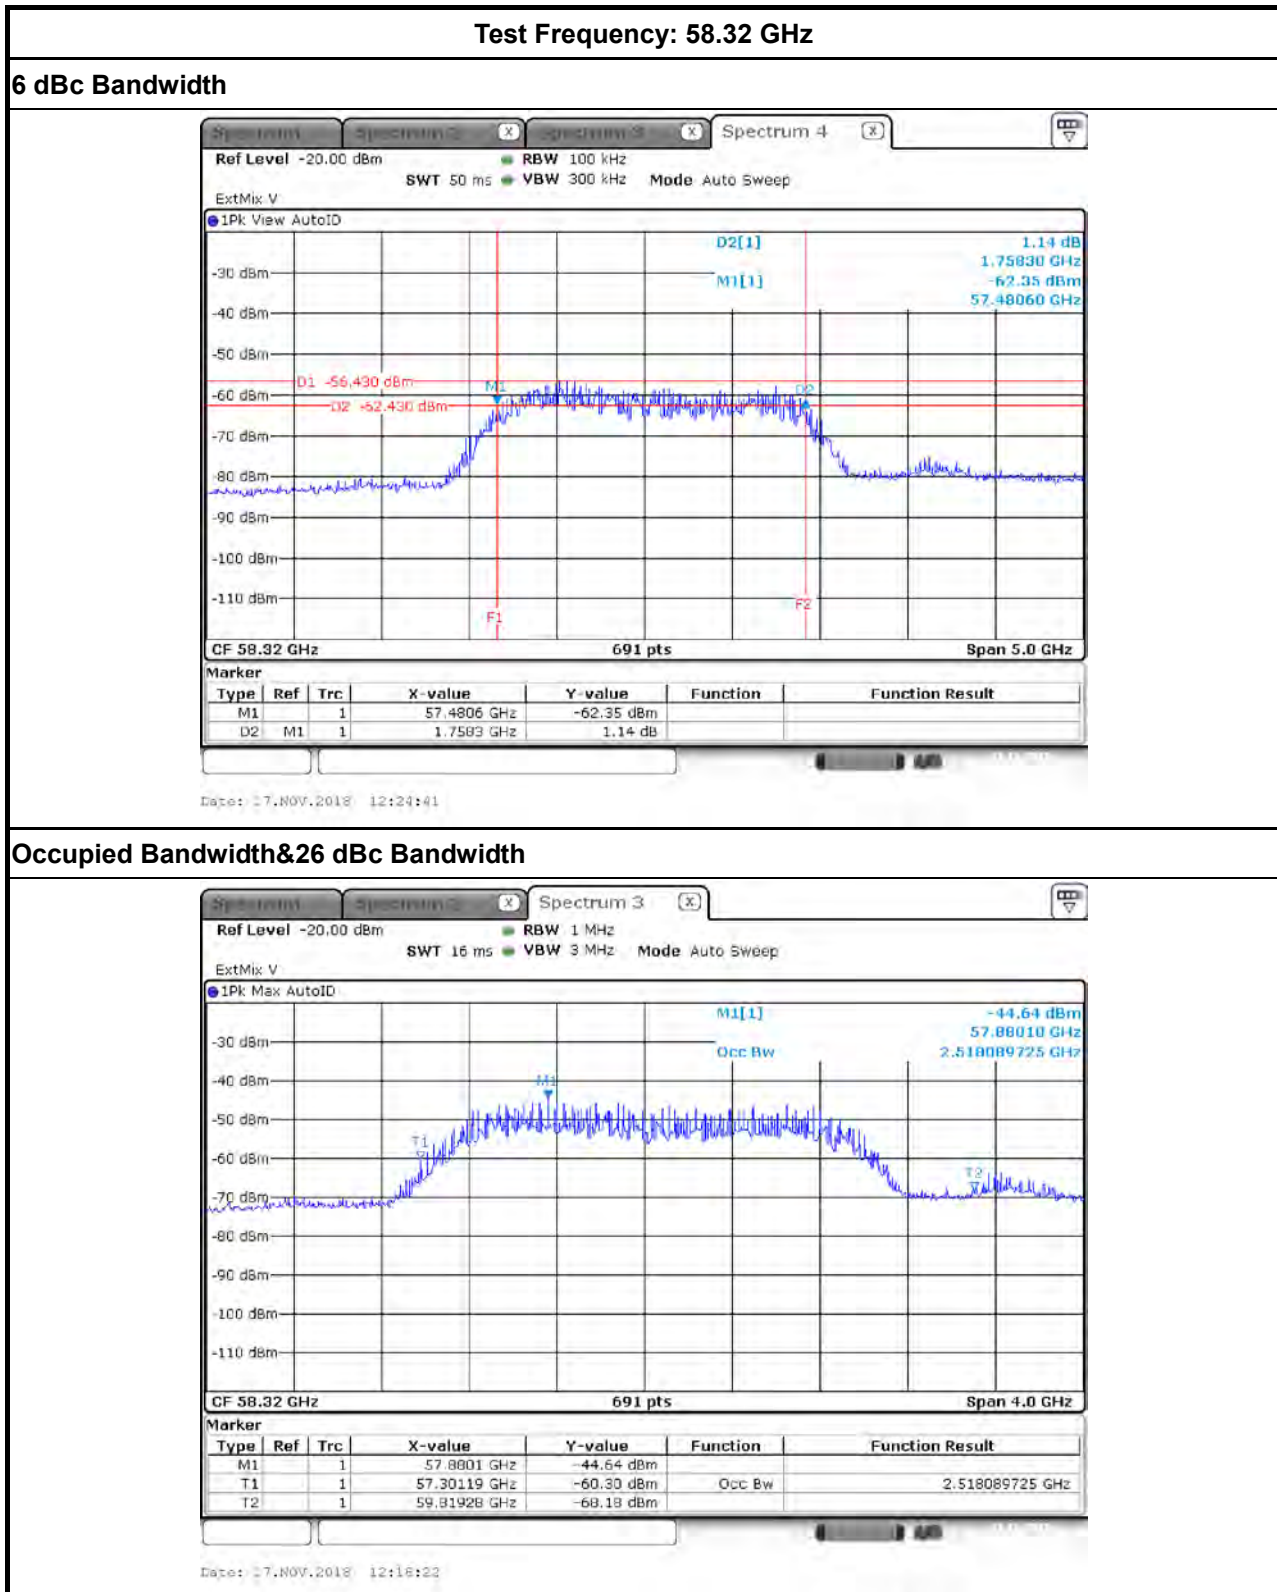




Test Frequency: 60.48 GHz

6 dBc Bandwidth

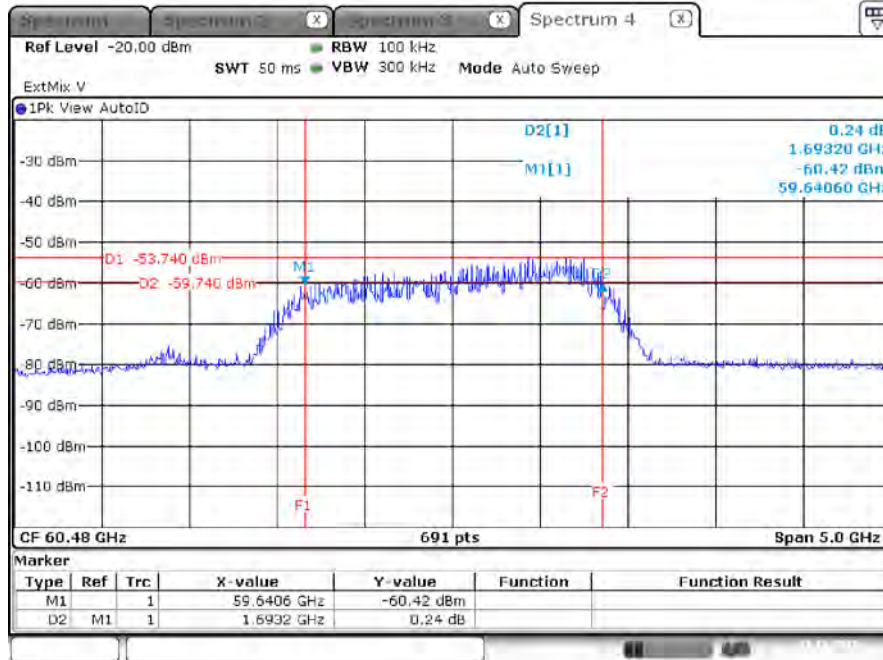

Date: 17.NOV.2018 12:32:48

Occupied Bandwidth & 26 dBc Bandwidth

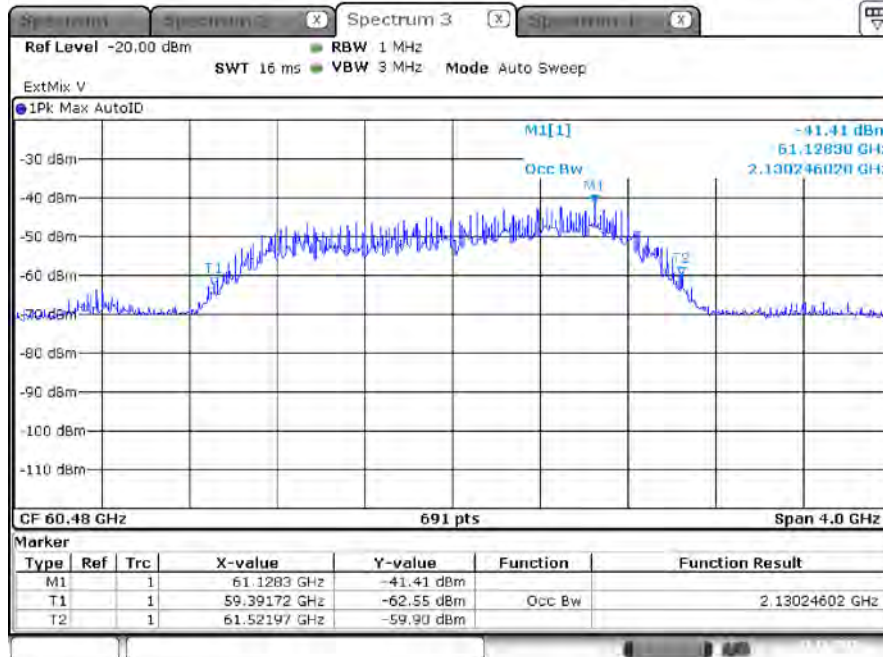


Date: 17.NOV.2018 12:30:29




Test Frequency: 62.64 GHz

6 dBc Bandwidth

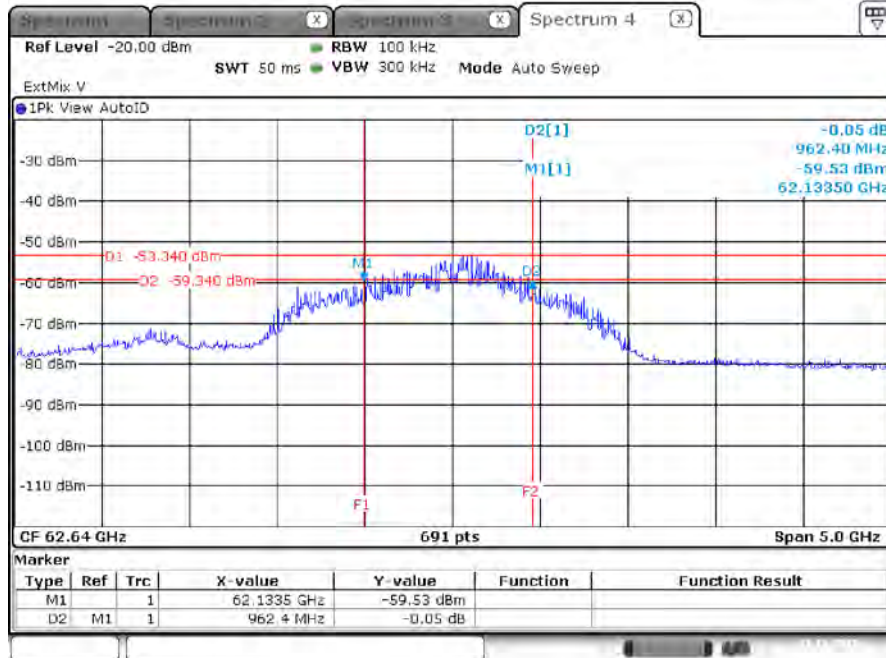

Date: 17.NOV.2018 12:48:56

Occupied Bandwidth

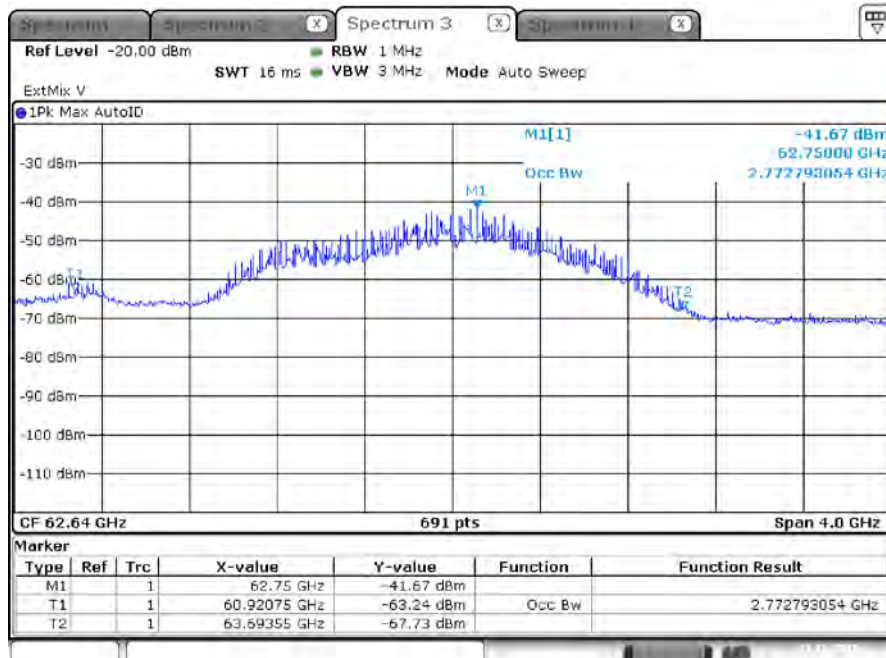

Date: 17.NOV.2018 12:48:26



### 3.3 EIRP Power

#### 3.3.1 Limit of EIRP Power

EIRP Power Limit		
Use Condition	EIRP Average Power	EIRP Peak Power
Fixed field disturbance sensors at within the frequency band 61-61.5GHz	40 dBm	43 dBm
Fixed field disturbance sensors at outside of the band 61-61.5GHz	10 dBm	13 dBm
Except fixed field disturbance sensors at 61-61.5GHz	N/A	10 dBm
Except outdoor fixed Point to Point	40 dBm	43 dBm
Outdoor fixed Point to Point	82 dBm	85 dBm

Note: For fixed point-to-point transmitters located outdoors, the average power of any emission shall not exceed 82 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi. The peak power of any emission shall not exceed 85 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.

NOTE: For the applicable limit, see FCC 15.255 (c)

#### 3.3.2 Measuring Instruments


Refer a measuring instruments list in this test report.

#### 3.3.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013 clause 9.3 & 9.5.



### 3.3.4 Test Setup

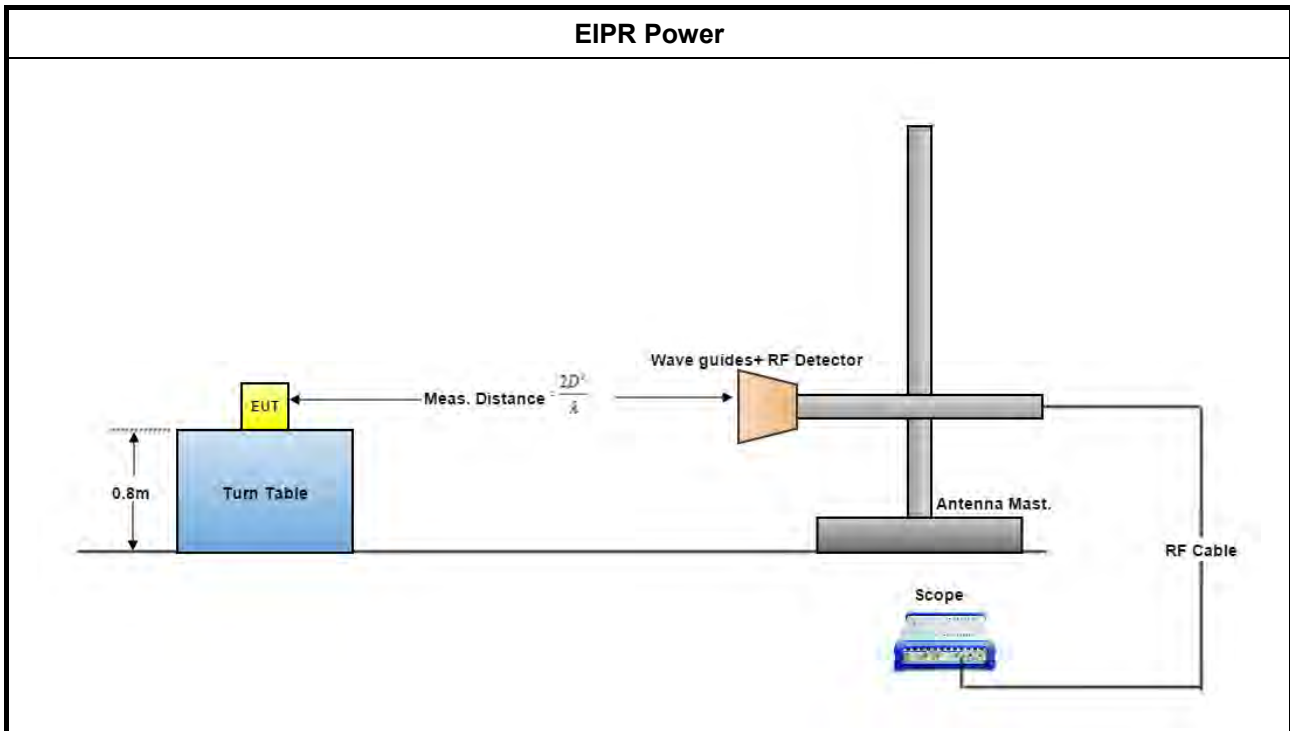

### 3.3.5 Test Result of EIRP Power

<b>Test Conditions</b>	see ANSI C63.10, clause 5.11 & clause 9
<b>Test Setup</b>	see ANSI C63.10, clause 9.11
<p>NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.</p>	



3.3.5.1 Test Result of EIRP Power

Test Distance		1 m									
Test Results											
Test Freq. (GHz)	Rx Gain (dBi)	DSO (mV)		Power Measured (dBm)		E <sub>Meas</sub> (dBuV/m)		EIRP (dBm)		EIRP Limit (dBm) (note 1)	
		Peak	AV	Peak	AV	Peak	AV	Peak	AV	Peak	AV
58.32	23.6	17.01	2.12	-19.44	-29.56	129.53	119.41	24.73	14.61	43	40
60.48	23.6	20.11	2.15	-18.49	-28.91	130.80	120.38	26.00	15.58	43	40
62.64	23.6	17.02	1.88	-19.40	-30.01	130.19	119.58	25.39	14.78	43	40

The measured power level is converted to EIRP using the Friis equation:  
 For radiated emissions, calculate the field strength (E) in dBuV/meter.  
 $E = 126.8 - 20\log(\lambda) + P - G$   
 where:  
 E : is the field strength of the emission at the measurement distance, in dBuV/m  
 P : is the power measured at the output of the test antenna, in dBm  
 λ : is the wavelength of the emission under investigation [300/fMHz], in m  
 G : is the gain of the test antenna, in dBi For radiated emissions, calculate the EIRP (dBm). If the measurement was performed in the far field, calculate the EIRP.  
 $EIRP = E\text{-meas} + 20\log(d\text{-meas}) - 104.7$   
 where:  
 EIRP : is the equivalent isotropically radiated power, in dBm  
 E-meas. : is the field strength of the emission at the measurement distance, in dBuV/m  
 d-meas. : is the measurement distance, in m  
 NOTE 1: For the applicable limit, see FCC 15.255 (c)  
 NOTE 2: The comparison method which replaces EUT with a signal generator is used to find the correct conversion factor between “DSO(mV)” & “Power Measured(dBm)”.



### 3.4 Peak Conducted Power

#### 3.4.1 Limit of Peak Conducted Power

Peak Conducted Power Limit	
6dBc Bandwidth	Peak Conducted Power (note 1)
> 100MHz	500mW
≤ 100MHz	500mW x (BW/100) (see note 2)

NOTE 1: For the applicable limit, see FCC 15.255(c)  
NOTE 2: BW= 6dB bandwidth (measured at RBW 100kHz)

#### 3.4.2 Measuring Instruments

Refer a measuring instruments list in this test report.

#### 3.4.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.5

#### 3.4.4 Test Result of Peak Conducted Power

<b>Test Conditions</b>	see ANSI C63.10, clause 5.11 & clause 9
<b>Test Setup</b>	see ANSI C63.10, clause 9.11

NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.



3.4.4.1 Peak Conducted Power

Test Results						
Test Freq. (GHz)	EIRP (dBm)	Max. Ant. Gain (dBi)	Peak Power (dBm) (note1)	Peak Power (mW)	6dBc BW (MHz) (note2)	Peak Power Limit (mW) (note3)
58.32	24.73	12.13	12.60	18.213	1758.30	500.00
60.48	26.00	13.48	12.52	17.864	1693.20	500.00
62.64	25.39	10.56	14.83	30.441	962.40	500.00

NOTE 1: Because EUT used for the integral antenna without temporary RF connector provided. Therefore peak conducted power is equal to EIRP power subtract the antenna gain.

NOTE 2: For the 6dBc bandwidth, see test report clause 3.2.5.

NOTE 3: For the applicable limit, see FCC 15.255(c)

NOTE 4: For radiated emission measurements, calculate conducted transmitter output power P(cond)(dBm)

$$P(\text{cond}) = \text{EIRP} - G(\text{dBi})$$

where:

G(dBi) is gain of EUT antenna.



### 3.5 Transmitter Spurious Emissions


#### 3.5.1 Limit of Transmitter Spurious Emissions


Frequency Range	Limit
Radiated emissions below 40 GHz	FCC 15.209
Radiated emissions above 40 GHz – 200GHz	90 pW/cm <sup>2</sup> @ 3 m (Equivalent EIRP 102 μW, -9.91dBm)
NOTE 1: For the applicable limit, see FCC 15.255(d)	
NOTE 2: Spurious emissions shall not exceed the level of the fundamental emission.	


#### 3.5.2 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.12

### 3.5.3 Test Setup

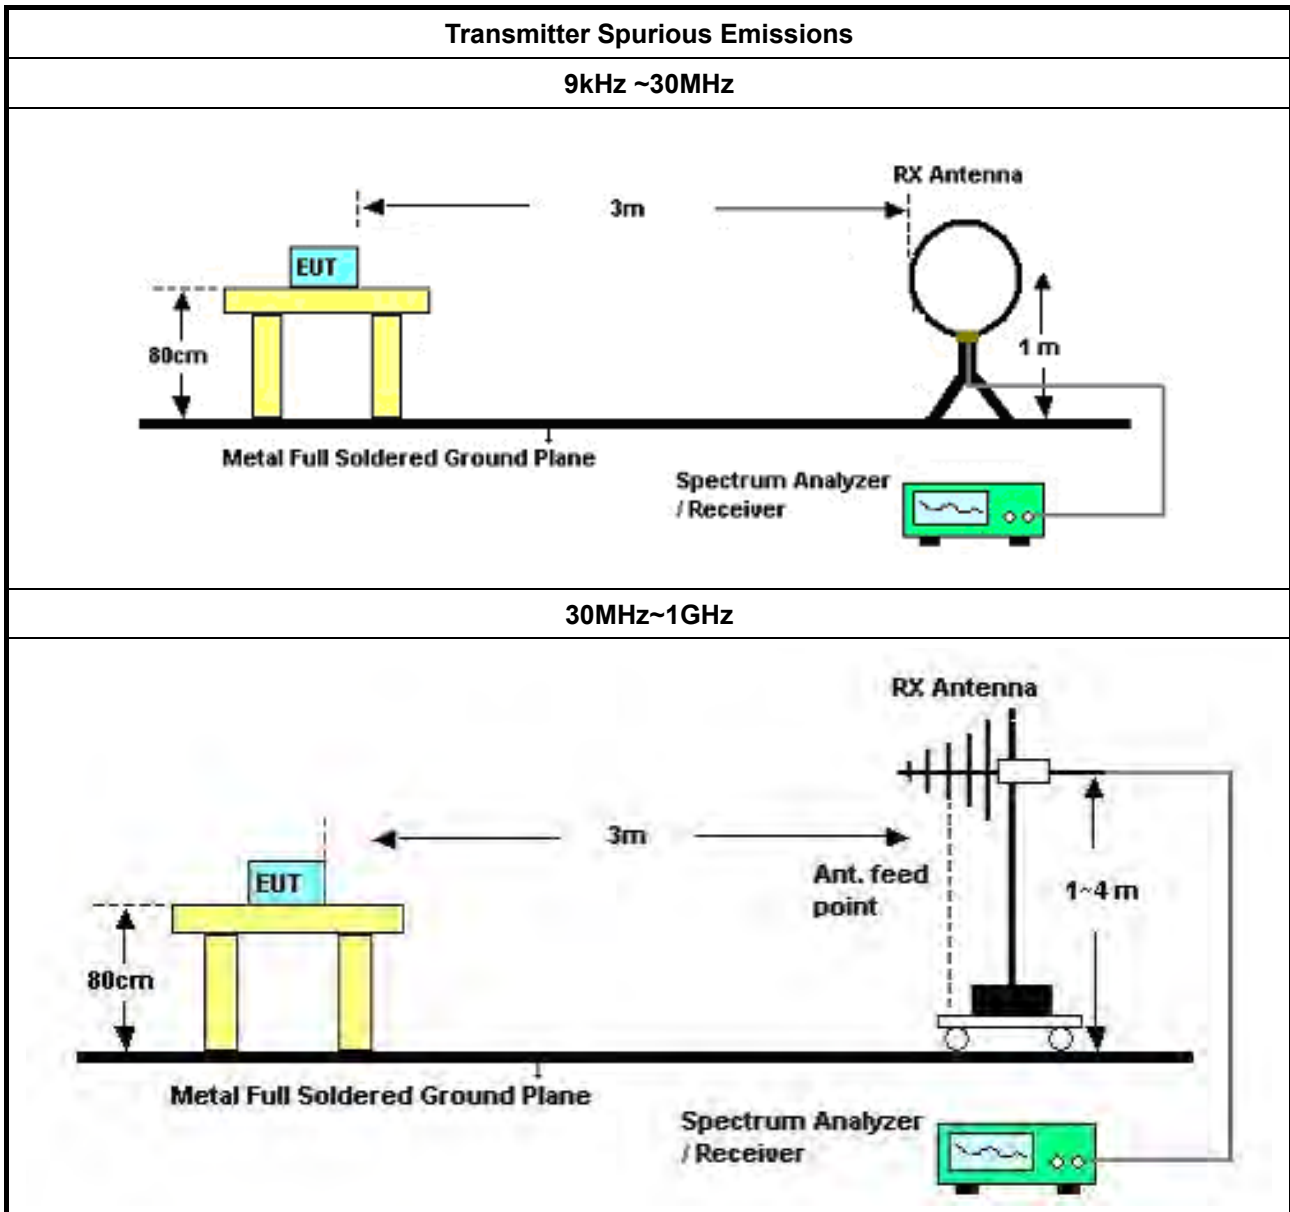

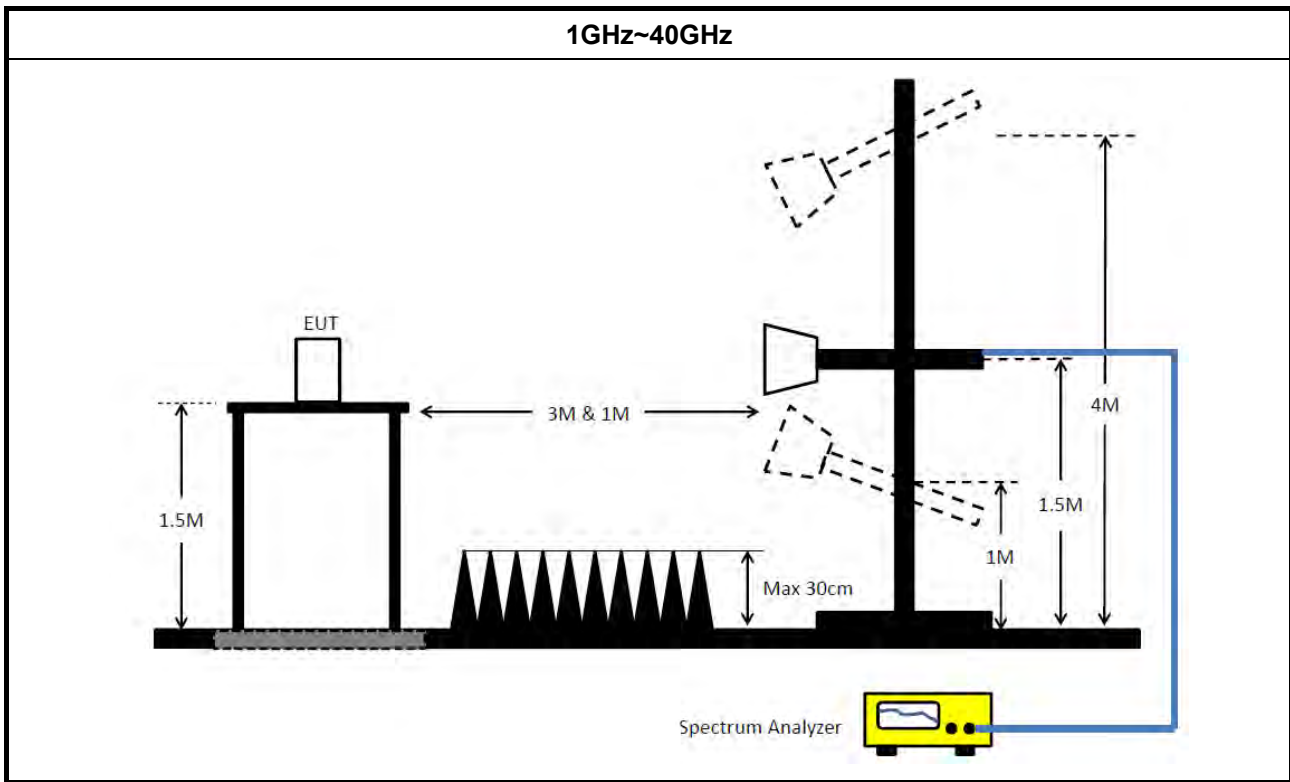

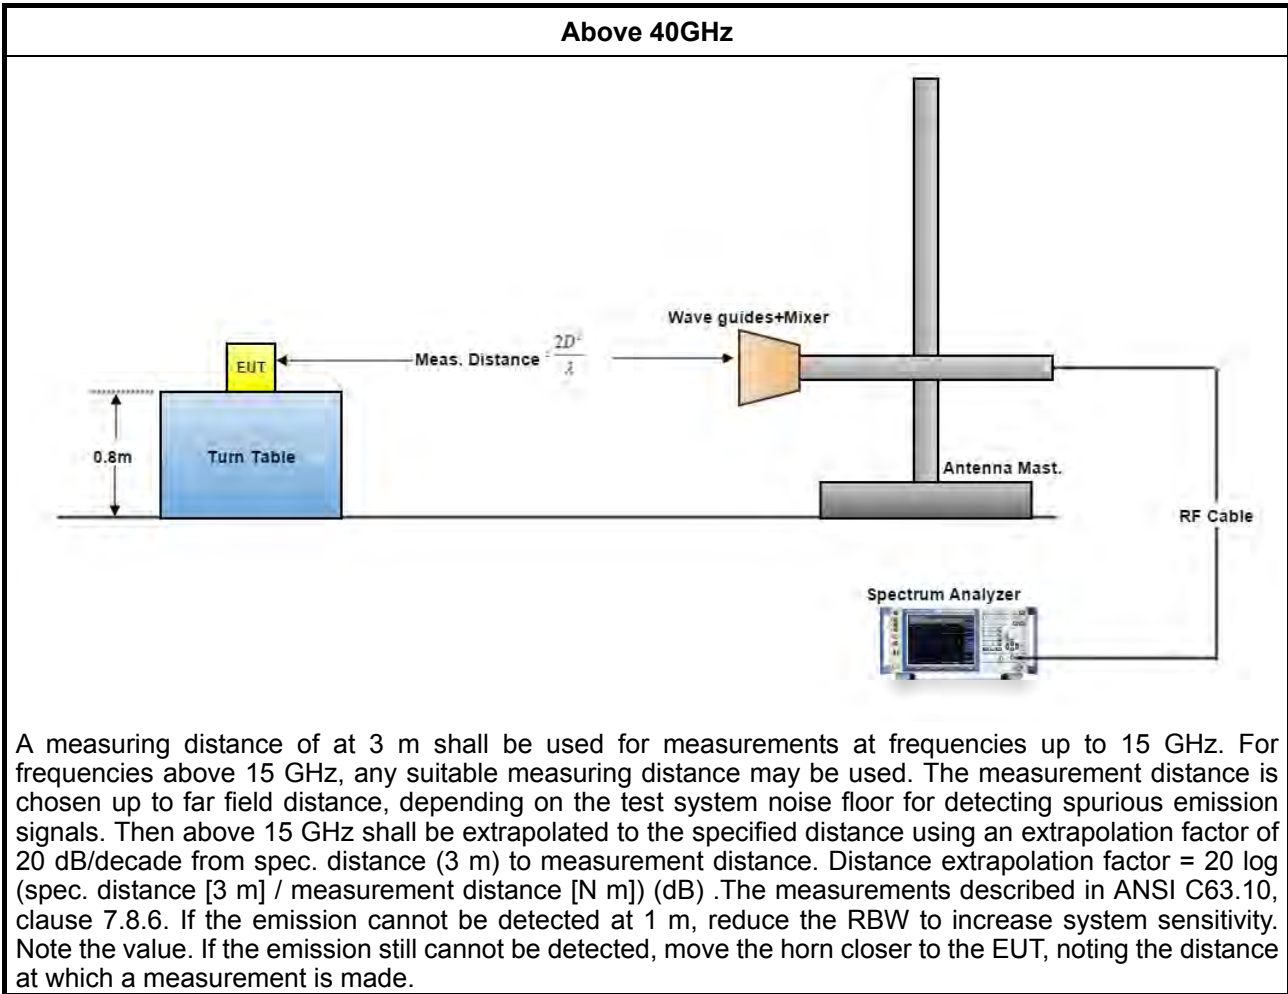

### 3.5.4 Test Result of Transmitter Spurious Emissions

<b>Test Conditions</b>	see ANSI C63.10, clause 5.11 & clause 9
<b>Test Setup</b>	see ANSI C63.10, clause 9.12 ~ 9.13
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	





### **3.5.5 Measurement Results Calculation**

The measured Level is calculated using:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### **3.5.5.1 Test Result of Transmitter Spurious Emissions (Below 30MHz)**

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.



3.5.5.2 Test Result of Transmitter Spurious Emissions

Test Range	30 MHz – 1000 MHz	Test Distance	3 m
Test Configuration	CTX	Test Mode	Mode 1


Vertical

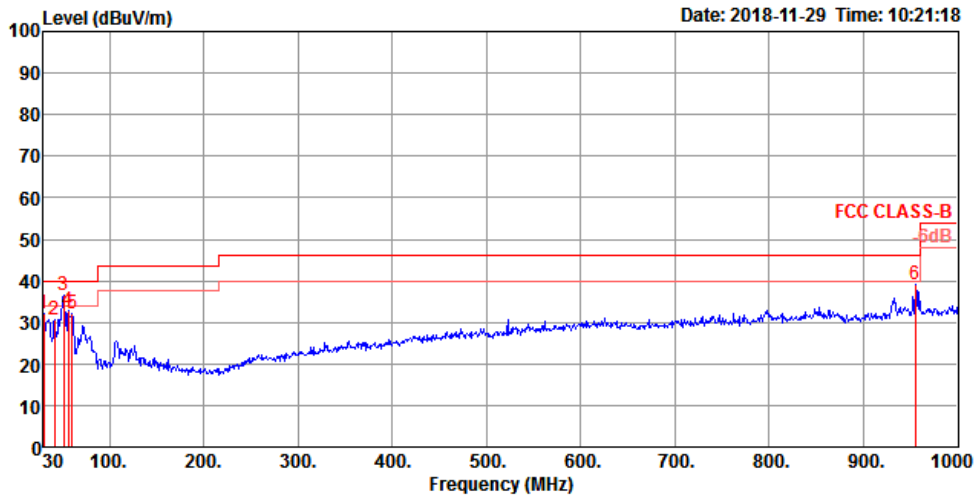

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	32.27	40.00	-7.73	40.11	0.49	24.10	32.43	125	188 Peak	VERTICAL
2	41.64	30.80	40.00	-9.20	45.18	0.63	17.41	32.42	100	360 Peak	VERTICAL
3	51.34	36.59	40.00	-3.41	54.96	0.74	13.31	32.42	100	41 Peak	VERTICAL
4	56.19	32.86	40.00	-7.14	51.99	0.77	12.51	32.41	150	187 Peak	VERTICAL
5	60.07	32.22	40.00	-7.78	51.43	0.83	12.37	32.41	125	195 Peak	VERTICAL
6	955.38	38.95	46.00	-7.05	40.11	3.29	26.69	31.14	150	81 Peak	VERTICAL



Horizontal

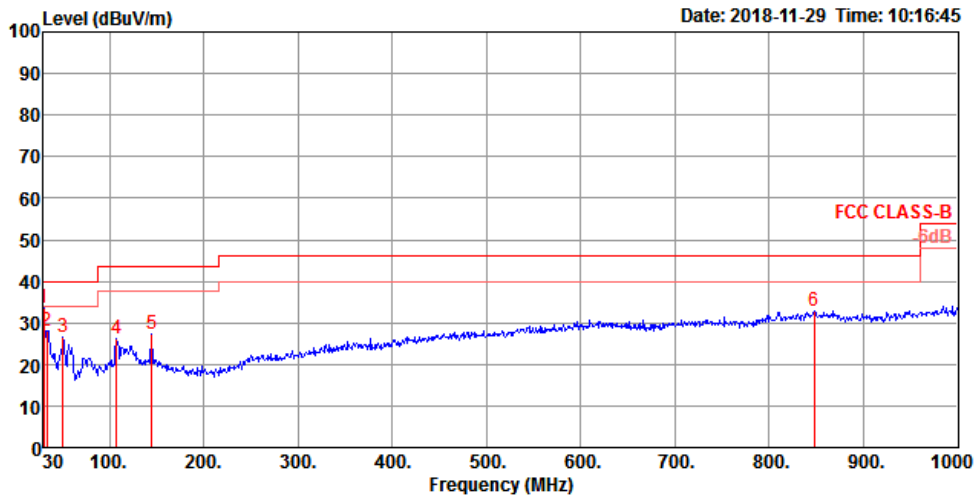

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	33.44	40.00	-6.56	41.28	0.49	24.10	32.43	150	28 Peak	HORIZONTAL
2	33.88	28.23	40.00	-11.77	38.28	0.55	21.82	32.42	300	156 Peak	HORIZONTAL
3	50.37	26.39	40.00	-13.61	44.58	0.73	13.50	32.42	300	91 Peak	HORIZONTAL
4	107.60	26.16	43.50	-17.34	39.86	1.08	17.58	32.36	300	258 Peak	HORIZONTAL
5	144.46	27.19	43.50	-16.31	41.59	1.24	16.69	32.33	125	254 Peak	HORIZONTAL
6	847.71	33.01	46.00	-12.99	35.64	3.09	26.14	31.86	200	227 Peak	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



<b>Test Range</b>	1 GHz – 18 GHz	<b>Test Distance</b>	3 m
<b>Test Freq. (MHz)</b>	58.32		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2688.69	42.88	54.00	-11.12	44.51	4.15	28.81	34.59	156	123	Average	VERTICAL
2	2688.76	47.37	74.00	-26.63	49.00	4.15	28.81	34.59	156	123	Peak	VERTICAL
3	7289.21	52.73	54.00	-1.27	43.29	6.78	37.30	34.64	136	158	Average	VERTICAL
4	7290.15	57.97	74.00	-16.03	48.53	6.78	37.30	34.64	136	158	Peak	VERTICAL
5	14580.02	52.64	54.00	-1.36	35.92	9.71	40.53	33.52	143	197	Average	VERTICAL
6	14580.85	61.74	74.00	-12.26	45.02	9.71	40.53	33.52	143	197	Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2688.06	44.92	54.00	-9.08	46.55	4.15	28.81	34.59	150	217	Average	HORIZONTAL
2	2688.26	47.96	74.00	-26.04	49.59	4.15	28.81	34.59	150	217	Peak	HORIZONTAL
3	7289.33	53.22	54.00	-0.78	43.78	6.78	37.30	34.64	165	179	Average	HORIZONTAL
4	7290.23	57.34	74.00	-16.66	47.90	6.78	37.30	34.64	165	179	Peak	HORIZONTAL
5	14579.60	61.26	74.00	-12.74	44.54	9.71	40.53	33.52	144	152	Peak	HORIZONTAL
6	14579.90	49.71	54.00	-4.29	32.99	9.71	40.53	33.52	144	152	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



<b>Test Range</b>	1 GHz – 18 GHz	<b>Test Distance</b>	3 m
<b>Test Freq. (MHz)</b>	60.12		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2687.70	42.57	54.00	-11.43	44.20	4.15	28.81	34.59	124	136	Average	VERTICAL
2	2688.35	46.69	74.00	-27.31	48.32	4.15	28.81	34.59	124	136	Peak	VERTICAL
3	7559.16	52.89	54.00	-1.11	43.04	7.13	37.40	34.68	293	174	Average	VERTICAL
4	7559.45	55.98	74.00	-18.02	46.13	7.13	37.40	34.68	293	174	Peak	VERTICAL
5	15573.48	47.54	54.00	-6.46	33.91	10.26	38.10	34.73	192	246	Average	VERTICAL
6	15573.96	60.97	74.00	-13.03	47.34	10.26	38.10	34.73	192	246	Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2687.14	45.11	54.00	-8.89	46.74	4.15	28.81	34.59	150	189	Average	HORIZONTAL
2	2688.30	47.81	74.00	-26.19	49.44	4.15	28.81	34.59	150	189	Peak	HORIZONTAL
3	7559.26	55.93	74.00	-18.07	46.08	7.13	37.40	34.68	162	239	Peak	HORIZONTAL
4	7559.52	51.42	54.00	-2.58	41.57	7.13	37.40	34.68	162	239	Average	HORIZONTAL
5	15573.26	43.74	54.00	-10.26	30.11	10.26	38.10	34.73	151	223	Average	HORIZONTAL
6	15573.56	56.67	74.00	-17.33	43.04	10.26	38.10	34.73	151	223	Peak	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



<b>Test Range</b>	1 GHz – 18 GHz	<b>Test Distance</b>	3 m
<b>Test Freq. (MHz)</b>	62.48		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2688.65	46.84	74.00	-27.16	48.47	4.15	28.81	34.59	103	165	Peak	VERTICAL
2	2689.55	42.87	54.00	-11.13	44.50	4.15	28.81	34.59	103	165	Average	VERTICAL
3	7827.51	59.03	74.00	-14.97	49.82	6.95	37.05	34.79	102	172	Peak	VERTICAL
4	7827.90	48.79	54.00	-5.21	39.58	6.95	37.05	34.79	102	172	Average	VERTICAL
5	15697.01	60.15	74.00	-13.85	46.34	10.33	38.30	34.82	189	236	Peak	VERTICAL
6	15697.58	47.38	54.00	-6.62	33.57	10.33	38.30	34.82	189	236	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2688.16	49.01	74.00	-24.99	50.64	4.15	28.81	34.59	143	217	Peak	HORIZONTAL
2	2688.56	45.61	54.00	-8.39	47.24	4.15	28.81	34.59	143	217	Average	HORIZONTAL
3	7827.37	57.33	74.00	-16.67	48.12	6.95	37.05	34.79	175	155	Peak	HORIZONTAL
4	7827.96	46.36	54.00	-7.64	37.15	6.95	37.05	34.79	175	155	Average	HORIZONTAL
5	15694.11	57.41	74.00	-16.59	43.60	10.33	38.30	34.82	144	109	Peak	HORIZONTAL
6	15695.52	44.07	54.00	-9.93	30.26	10.33	38.30	34.82	144	109	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



<b>Test Range</b>	18 GHz – 40 GHz	<b>Test Distance</b>	1 m
<b>Test Freq. (MHz)</b>	58.32		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18130.36	40.77	63.54	-22.77	40.76	12.53	37.35	49.87	151	191	Average	VERTICAL
2	18134.04	54.29	83.54	-29.25	54.28	12.53	37.35	49.87	151	191	Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18133.56	54.46	83.54	-29.08	54.45	12.53	37.35	49.87	152	235	Peak	HORIZONTAL
2	18134.65	41.16	63.54	-22.38	41.15	12.53	37.35	49.87	152	235	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



<b>Test Range</b>	18 GHz – 40 GHz	<b>Test Distance</b>	1 m
<b>Test Freq. (MHz)</b>	60.12		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18082.80	55.39	83.54	-28.15	55.38	12.52	37.37	49.88	151	176	Peak	VERTICAL
2	18085.36	42.35	63.54	-21.19	42.34	12.52	37.37	49.88	151	176	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18082.57	54.41	83.54	-29.13	54.40	12.52	37.37	49.88	150	21	Peak	HORIZONTAL
2	18084.18	41.54	63.54	-22.00	41.53	12.52	37.37	49.88	150	21	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.





<b>Test Range</b>	18 GHz – 40 GHz	<b>Test Distance</b>	1 m
<b>Test Freq. (MHz)</b>	62.48		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18177.88	42.29	63.54	-21.25	42.28	12.54	37.33	49.86	152	234	Average	VERTICAL
2	18179.32	51.42	83.54	-32.12	51.41	12.54	37.33	49.86	152	234	Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18177.14	41.12	63.54	-22.42	41.11	12.54	37.33	49.86	153	118	Average	HORIZONTAL
2	18178.85	51.56	83.54	-31.98	51.55	12.54	37.33	49.86	153	118	Peak	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



<b>Test Range</b>	40GHz – 200GHz
-------------------	----------------

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
58.32	23.6	1.0	50.28	-77.73
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )	Test Result
-34.86	3	0.2887	90.00	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
60.48	23.6	1.0	50.07	-79.11
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )	Test Result
-36.28	3	0.2084	90.00	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
62.64	23.6	1.0	50.24	-79.28
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )	Test Result
-36.42	3	0.2017	90.00	PASS

Note:  
 $EIRP = Prx - Grx + \text{Free Space Path Loss} = Prx - Grx + 20\text{Log}(4\pi d / \lambda)^2$   
 Which  
 $Prx = \text{Read Level.}$   
 $Grx = \text{Rx Antenna Gain.}$   
 A distance factor is offset and the formula is  $20\text{LOG}(D1/D2)$   
 Which  
 $D1 = \text{Specification Distance}$   
 $D2 = \text{Measurement Distance}$

### 3.6 Frequency Stability

#### 3.6.1 Limit of Frequency Stability

Frequency Stability	Limit
Refer as FCC 15.255(f) and ANSI C63.10-2013, clause 9.14	within the frequency bands
Note: These measurements shall also be performed at normal and extreme test conditions.	


#### 3.6.2 Measuring Instruments

Refer a measuring instruments list in this test report.

#### 3.6.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 9.14.

#### 3.6.4 Test Setup

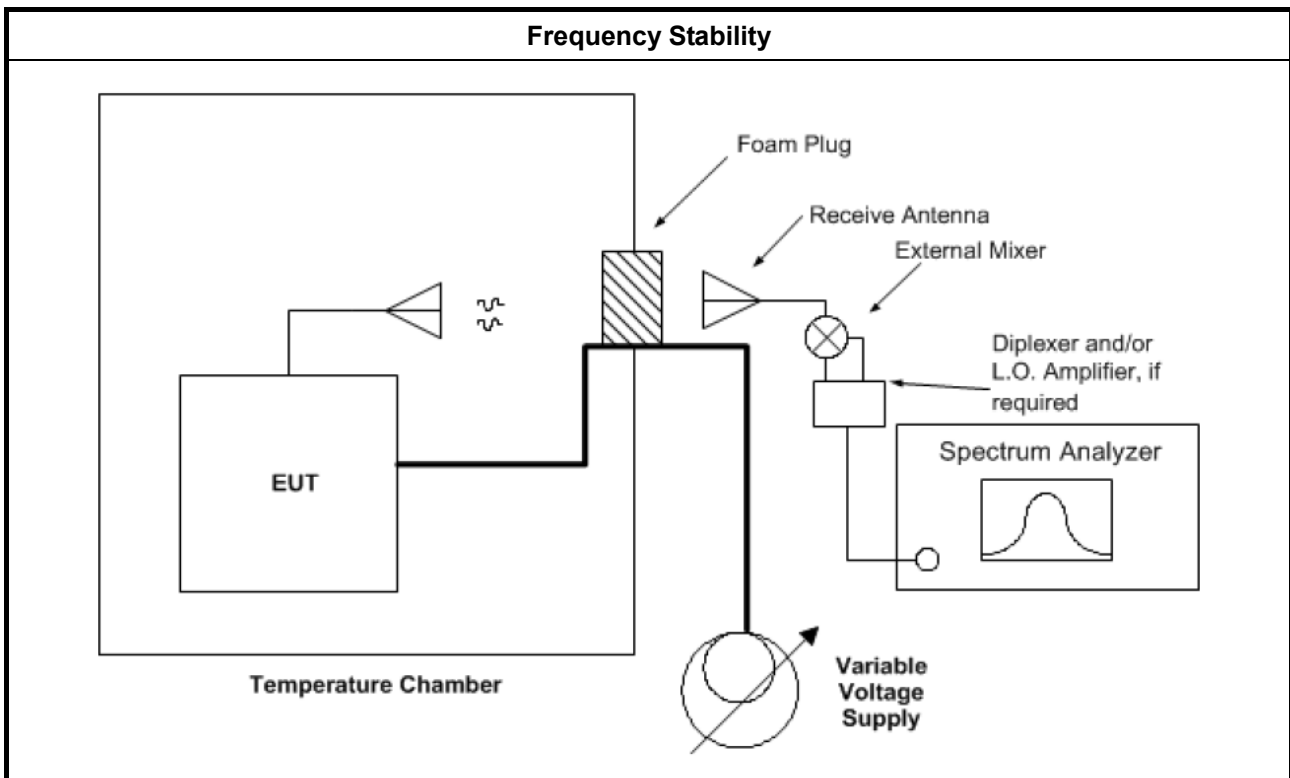



3.6.5 Test Result of Frequency Stability

<b>Test Conditions</b>	see ANSI C63.10, clause 5.11 & clause 9
<b>Test Setup</b>	see ANSI C63.10, clause 9.14
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	

3.6.5.1 Frequency Stability with Respect to Ambient Temperature

Frequency Stability with Respect to Ambient Temperature			
Test Results			
Test Temperature (°C)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
-30	60480.6802	-19.20	within band
-20	60480.6797	-19.70	within band
-10	60480.6811	-18.30	within band
0	60480.6855	-13.90	within band
10	60480.6874	-12.00	within band
20	60480.6994	Reference	within band
30	60480.6998	0.40	within band
40	60480.6999	0.50	within band
50	60480.6985	-0.90	within band

NOTE: The manufacturer's specified temperature range of -30 to 50°C.



3.6.5.2 Frequency Stability When Varying Supply Voltage

Frequency Stability When Varying Supply Voltage			
Test Results			
Test Voltage: (Vdc)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
93.5	60480.6995	0.10	within band
110	60480.6994	Reference	within band
126.5	60480.6996	0.20	within band

NOTE: For the applicable limit, see FCC 15.255(f).



### 3.7 Operation Restriction and Group Installation

#### 3.7.1 Limit of Operation Restriction and Group Installation

Item	Limit
Operation Restriction	Operation is not permitted for the following products: <ul style="list-style-type: none"><li>♦ Equipment used on aircraft or satellites. (Refer as FCC 15.255 (a))</li><li>♦ Field disturbance sensors, including vehicle radar systems, unless the field disturbance sensors are employed for fixed operation. (Refer as FCC 15.255 (a))</li></ul>
Group Installation	Operation is not permitted for the following products: <ul style="list-style-type: none"><li>♦ External phase-locking (Refer as FCC 15.255 (h))</li></ul>

#### 3.7.2 Result of Operation Restriction

Manufacturer declares that EUT will not be used on aircraft or satellites. Then user manual will include a statement to caution EUT is not permitted for use on aircraft or satellites. EUT is a wireless video area network (WVAN) for the connection of consumer electronic (CE) audio and video devices.

#### 3.7.3 Result of Group Installation

The frequency, amplitude and phase of the transmit signal are set within the EUT. There are no external phase-locking inputs or any other means of combining two or more units together to realize a beam-forming array.



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 21, 2018	Nov. 20, 2019	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 05, 2018	Nov. 04, 2019	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	Jan. 16, 2019	Jan. 15, 2020	Conduction (CO02-CB)
COND Cable	Woken	Cable	2	0.15MHz ~ 30MHz	Nov. 06, 2018	Nov. 05, 2019	Conduction (CO02-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO02-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2018	Mar. 15, 2019	Radiation (03CH01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 27, 2018	Aug. 26, 2019	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 13, 2018	Nov. 12, 2019	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 28, 2018	Jun. 27, 2019	Radiation (03CH01-CB)
Pre-Amplifier	EMCI	EMC330N	980332	20MHz ~ 3GHz	May 02, 2018	May 01, 2019	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 09, 2018	Jan. 08, 2019	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 04, 2018	Jul. 03, 2019	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100080	9kHz~40GHz	Oct. 03, 2018	Oct. 02, 2019	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS	100359	9kHz ~ 2.75GHz	Jul. 03, 2018	Jul. 02, 2019	Radiation (03CH01-CB)
RF Cable-low	Woken	RG402	Low Cable-16+17	30 MHz ~ 1 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
Mixer	OML	M19HW/A	U91113-1	40 ~ 60 GHz	Oct. 12, 2017*	Oct. 11, 2019	Radiation (03CH01-CB)
Mixer	OML	M15HW/A	V91113-1	50 ~ 75 GHz	Oct. 12, 2017*	Oct. 11, 2019	Radiation (03CH01-CB)
Mixer	OML	M12HW/A	E91113-1	60 ~ 90 GHz	Oct. 12, 2017*	Oct. 11, 2019	Radiation (03CH01-CB)
Mixer	OML	M08HW/A	F91113-1	90 ~ 140 GHz	Oct. 12, 2017*	Oct. 11, 2019	Radiation (03CH01-CB)
Mixer	OML	M05HW/A	G91113-1	140 ~ 220 GHz	Oct. 12, 2017*	Oct. 11, 2019	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M19RH	U91113-A	40 ~ 60 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M15RH	V91113-A	50 ~ 75 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M12RH	E91113-A	60 ~ 90 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M08RH	F91113-A	90 ~ 140 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M05RH	G91113-A	140 ~ 220 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Detector	Millitech	DET-15-RPF W0	#A18185(074)	50 ~ 75 GHz	Jan. 29, 2018*	Jan. 29, 2020	Radiation (03CH01-CB)
Pico Scope	Pico	Pico Scope 6402C	CX372/002	N/A	Jul. 13, 2018	Jul. 12, 2019	Radiation (03CH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 01, 2018	May 31, 2019	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

\*\*\* Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.





## 5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	5.1 dB	Confidence levels of 95%
Radiated Emission (40GHz ~ 60GHz)	4.6 dB	Confidence levels of 95%
Radiated Emission (60GHz ~ 90GHz)	5.1 dB	Confidence levels of 95%
Radiated Emission (90GHz ~ 200GHz)	5.6 dB	Confidence levels of 95%
Temperature	1°C	Confidence levels of 95%