



	72																																																																																																																																
Mode	Band Edge - L																																																																																																																																
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																
ANT	1+2																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5647.25</td> <td>55.35</td> <td>68.20</td> <td>-12.85</td> <td>43.52</td> <td>33.18</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>112</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5652.68</td> <td>55.75</td> <td>70.19</td> <td>-14.44</td> <td>43.88</td> <td>33.22</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>112</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5710.60</td> <td>65.70</td> <td>108.17</td> <td>-42.47</td> <td>53.49</td> <td>33.54</td> <td>13.68</td> <td>35.01</td> <td>0.00</td> <td>112</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.85</td> <td>63.54</td> <td>110.91</td> <td>-47.37</td> <td>51.29</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>112</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5647.25	55.35	68.20	-12.85	43.52	33.18	13.61	34.96	0.00	112	330	PEAK	2	5652.68	55.75	70.19	-14.44	43.88	33.22	13.61	34.96	0.00	112	330	PEAK	3	5710.60	65.70	108.17	-42.47	53.49	33.54	13.68	35.01	0.00	112	330	PEAK	4	5720.85	63.54	110.91	-47.37	51.29	33.58	13.69	35.02	0.00	112	330	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII)_3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>106.72</td> <td>-----</td> <td>-----</td> <td>94.33</td> <td>33.70</td> <td>13.75</td> <td>35.06</td> <td>0.00</td> <td>112</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	106.72	-----	-----	94.33	33.70	13.75	35.06	0.00	112	330	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5647.25	55.35	68.20	-12.85	43.52	33.18	13.61	34.96	0.00	112	330	PEAK																																																																																																																					
2	5652.68	55.75	70.19	-14.44	43.88	33.22	13.61	34.96	0.00	112	330	PEAK																																																																																																																					
3	5710.60	65.70	108.17	-42.47	53.49	33.54	13.68	35.01	0.00	112	330	PEAK																																																																																																																					
4	5720.85	63.54	110.91	-47.37	51.29	33.58	13.69	35.02	0.00	112	330	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5775.00	106.72	-----	-----	94.33	33.70	13.75	35.06	0.00	112	330	PEAK																																																																																																																					
Avg	Blank	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>101.03</td> <td>-----</td> <td>-----</td> <td>88.64</td> <td>33.70</td> <td>13.75</td> <td>35.06</td> <td>0.00</td> <td>112</td> <td>330</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	101.03	-----	-----	88.64	33.70	13.75	35.06	0.00	112	330	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5775.00	101.03	-----	-----	88.64	33.70	13.75	35.06	0.00	112	330	AVERAGE																																																																																																																					



Mode	72																																																																													
	Band Edge - R																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																													
ANT	1+2																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<p>Site : 03CH21-HY            Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.80</td> <td>61.76</td> <td>111.26</td> <td>-49.50</td> <td>49.34</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>112</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>2 5867.05</td> <td>66.03</td> <td>107.42</td> <td>-41.39</td> <td>53.61</td> <td>33.70</td> <td>13.87</td> <td>35.15</td> <td>0.00</td> <td>112</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>3 5924.28</td> <td>52.43</td> <td>68.73</td> <td>-16.30</td> <td>40.03</td> <td>33.65</td> <td>13.94</td> <td>35.19</td> <td>0.00</td> <td>112</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>4 5925.33</td> <td>53.30</td> <td>68.20</td> <td>-14.90</td> <td>40.91</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>112</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5854.80	61.76	111.26	-49.50	49.34	33.70	13.86	35.14	0.00	112	330	PEAK	2 5867.05	66.03	107.42	-41.39	53.61	33.70	13.87	35.15	0.00	112	330	PEAK	3 5924.28	52.43	68.73	-16.30	40.03	33.65	13.94	35.19	0.00	112	330	PEAK	4 5925.33	53.30	68.20	-14.90	40.91	33.65	13.94	35.20	0.00	112	330	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5854.80	61.76	111.26	-49.50	49.34	33.70	13.86	35.14	0.00	112	330	PEAK																																																																			
2 5867.05	66.03	107.42	-41.39	53.61	33.70	13.87	35.15	0.00	112	330	PEAK																																																																			
3 5924.28	52.43	68.73	-16.30	40.03	33.65	13.94	35.19	0.00	112	330	PEAK																																																																			
4 5925.33	53.30	68.20	-14.90	40.91	33.65	13.94	35.20	0.00	112	330	PEAK																																																																			



	72																																																																																																										
Mode	Band Edge - L																																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																										
ANT	1+2																																																																																																										
Pol.	Vertical	Fundamental																																																																																																									
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5639.20</td> <td>62.98</td> <td>68.20</td> <td>-5.22</td> <td>51.19</td> <td>33.14</td> <td>13.60</td> <td>34.95</td> <td>0.00</td> <td>106</td> <td>287</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.28</td> <td>64.02</td> <td>69.15</td> <td>-5.13</td> <td>52.16</td> <td>33.21</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>106</td> <td>287</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5707.00</td> <td>76.00</td> <td>107.39</td> <td>-31.39</td> <td>63.80</td> <td>33.53</td> <td>13.68</td> <td>35.01</td> <td>0.00</td> <td>106</td> <td>287</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.05</td> <td>73.80</td> <td>110.91</td> <td>-37.11</td> <td>61.55</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>106</td> <td>287</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1	5639.20	62.98	68.20	-5.22	51.19	33.14	13.60	34.95	0.00	106	287	PEAK	2	5651.28	64.02	69.15	-5.13	52.16	33.21	13.61	34.96	0.00	106	287	PEAK	3	5707.00	76.00	107.39	-31.39	63.80	33.53	13.68	35.01	0.00	106	287	PEAK	4	5720.05	73.80	110.91	-37.11	61.55	33.58	13.69	35.02	0.00	106	287	PEAK	<p>Site : 03CH21-HY Condition: PEAK(U11) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>115.67</td> <td>-----</td> <td>-----</td> <td>103.28</td> <td>33.70</td> <td>13.75</td> <td>35.06</td> <td>0.00</td> <td>106</td> <td>287</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1	5775.00	115.67	-----	-----	103.28	33.70	13.75	35.06	0.00	106	287	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																																		
1	5639.20	62.98	68.20	-5.22	51.19	33.14	13.60	34.95	0.00	106	287	PEAK																																																																																															
2	5651.28	64.02	69.15	-5.13	52.16	33.21	13.61	34.96	0.00	106	287	PEAK																																																																																															
3	5707.00	76.00	107.39	-31.39	63.80	33.53	13.68	35.01	0.00	106	287	PEAK																																																																																															
4	5720.05	73.80	110.91	-37.11	61.55	33.58	13.69	35.02	0.00	106	287	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																																		
1	5775.00	115.67	-----	-----	103.28	33.70	13.75	35.06	0.00	106	287	PEAK																																																																																															
Avg	Blank	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>109.83</td> <td>-----</td> <td>-----</td> <td>97.44</td> <td>33.70</td> <td>13.75</td> <td>35.06</td> <td>0.00</td> <td>106</td> <td>287</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1	5775.00	109.83	-----	-----	97.44	33.70	13.75	35.06	0.00	106	287	AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																																		
1	5775.00	109.83	-----	-----	97.44	33.70	13.75	35.06	0.00	106	287	AVERAGE																																																																																															



Mode	72																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<p>Site : 03CH21-HY            Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.45</td> <td>73.42</td> <td>112.05</td> <td>-38.63</td> <td>60.99</td> <td>33.70</td> <td>13.86</td> <td>35.13</td> <td>0.00</td> <td>106</td> <td>287</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.93</td> <td>71.10</td> <td>105.22</td> <td>-34.12</td> <td>58.67</td> <td>33.70</td> <td>13.88</td> <td>35.15</td> <td>0.00</td> <td>106</td> <td>287</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>58.55</td> <td>68.35</td> <td>-9.80</td> <td>46.16</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>106</td> <td>287</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5948.08</td> <td>59.58</td> <td>68.20</td> <td>-8.62</td> <td>47.23</td> <td>33.60</td> <td>13.97</td> <td>35.22</td> <td>0.00</td> <td>106</td> <td>287</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.45	73.42	112.05	-38.63	60.99	33.70	13.86	35.13	0.00	106	287	PEAK	2	5874.93	71.10	105.22	-34.12	58.67	33.70	13.88	35.15	0.00	106	287	PEAK	3	5924.80	58.55	68.35	-9.80	46.16	33.65	13.94	35.20	0.00	106	287	PEAK	4	5948.08	59.58	68.20	-8.62	47.23	33.60	13.97	35.22	0.00	106	287	PEAK	Blank
Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.45	73.42	112.05	-38.63	60.99	33.70	13.86	35.13	0.00	106	287	PEAK																																																																								
2	5874.93	71.10	105.22	-34.12	58.67	33.70	13.88	35.15	0.00	106	287	PEAK																																																																								
3	5924.80	58.55	68.35	-9.80	46.16	33.65	13.94	35.20	0.00	106	287	PEAK																																																																								
4	5948.08	59.58	68.20	-8.62	47.23	33.60	13.97	35.22	0.00	106	287	PEAK																																																																								



Mode	72																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>50.96</td> <td>74.00</td> <td>-23.04</td> <td>33.17</td> <td>38.50</td> <td>19.55</td> <td>40.69</td> <td>0.43</td> <td>100</td> <td>187</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11550.00</td> <td>42.47</td> <td>54.00</td> <td>-11.53</td> <td>24.68</td> <td>38.50</td> <td>19.55</td> <td>40.69</td> <td>0.43</td> <td>100</td> <td>187</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17325.00</td> <td>52.42</td> <td>68.20</td> <td>-15.78</td> <td>35.35</td> <td>39.90</td> <td>24.08</td> <td>47.37</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	50.96	74.00	-23.04	33.17	38.50	19.55	40.69	0.43	100	187	PEAK	2	11550.00	42.47	54.00	-11.53	24.68	38.50	19.55	40.69	0.43	100	187	AVERAGE	3	17325.00	52.42	68.20	-15.78	35.35	39.90	24.08	47.37	0.46	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>52.16</td> <td>74.00</td> <td>-21.84</td> <td>34.37</td> <td>38.50</td> <td>19.55</td> <td>40.69</td> <td>0.43</td> <td>100</td> <td>174</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11550.00</td> <td>42.10</td> <td>54.00</td> <td>-11.90</td> <td>24.31</td> <td>38.50</td> <td>19.55</td> <td>40.69</td> <td>0.43</td> <td>100</td> <td>174</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17325.00</td> <td>52.30</td> <td>68.20</td> <td>-15.90</td> <td>35.23</td> <td>39.90</td> <td>24.08</td> <td>47.37</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	52.16	74.00	-21.84	34.37	38.50	19.55	40.69	0.43	100	174	PEAK	2	11550.00	42.10	54.00	-11.90	24.31	38.50	19.55	40.69	0.43	100	174	AVERAGE	3	17325.00	52.30	68.20	-15.90	35.23	39.90	24.08	47.37	0.46	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11550.00	50.96	74.00	-23.04	33.17	38.50	19.55	40.69	0.43	100	187	PEAK																																																																																																																												
2	11550.00	42.47	54.00	-11.53	24.68	38.50	19.55	40.69	0.43	100	187	AVERAGE																																																																																																																												
3	17325.00	52.42	68.20	-15.78	35.35	39.90	24.08	47.37	0.46	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11550.00	52.16	74.00	-21.84	34.37	38.50	19.55	40.69	0.43	100	174	PEAK																																																																																																																												
2	11550.00	42.10	54.00	-11.90	24.31	38.50	19.55	40.69	0.43	100	174	AVERAGE																																																																																																																												
3	17325.00	52.30	68.20	-15.90	35.23	39.90	24.08	47.37	0.46	--	--	PEAK																																																																																																																												



	72	
<b>Mode</b>	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
<b>ANT</b>	1+2	
<b>Pol.</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>10.6G ~18G Avg</b>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>



<b>73</b>																																																																													
<b>Mode</b>	<b>Band Edge - L</b>																																																																												
<b>U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz</b>																																																																													
<b>ANT</b>	<b>1+2</b>																																																																												
<b>Pol.</b>	<b>Horizontal</b>																																																																												
<b>Peak</b>	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5646.73</td> <td>55.34</td> <td>68.20</td> <td>-12.86</td> <td>43.51</td> <td>33.18</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>100</td> <td>332</td> <td>PEAK</td> </tr> <tr> <td>2 5651.98</td> <td>55.85</td> <td>69.67</td> <td>-13.82</td> <td>43.99</td> <td>33.21</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>100</td> <td>332</td> <td>PEAK</td> </tr> <tr> <td>3 5710.78</td> <td>66.53</td> <td>108.22</td> <td>-41.69</td> <td>54.32</td> <td>33.54</td> <td>13.68</td> <td>35.01</td> <td>0.00</td> <td>100</td> <td>332</td> <td>PEAK</td> </tr> <tr> <td>4 5720.23</td> <td>63.94</td> <td>111.31</td> <td>-47.37</td> <td>51.69</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>332</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5646.73	55.34	68.20	-12.86	43.51	33.18	13.61	34.96	0.00	100	332	PEAK	2 5651.98	55.85	69.67	-13.82	43.99	33.21	13.61	34.96	0.00	100	332	PEAK	3 5710.78	66.53	108.22	-41.69	54.32	33.54	13.68	35.01	0.00	100	332	PEAK	4 5720.23	63.94	111.31	-47.37	51.69	33.58	13.69	35.02	0.00	100	332	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																				
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5646.73	55.34	68.20	-12.86	43.51	33.18	13.61	34.96	0.00	100	332	PEAK																																																																		
2 5651.98	55.85	69.67	-13.82	43.99	33.21	13.61	34.96	0.00	100	332	PEAK																																																																		
3 5710.78	66.53	108.22	-41.69	54.32	33.54	13.68	35.01	0.00	100	332	PEAK																																																																		
4 5720.23	63.94	111.31	-47.37	51.69	33.58	13.69	35.02	0.00	100	332	PEAK																																																																		
<b>Fundamental</b>																																																																													
<b>Avg</b>	<p>Site : 03CH21-HY Condition: PEAK(U-NII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5775.00</td> <td>106.02</td> <td>-----</td> <td>-----</td> <td>93.63</td> <td>33.70</td> <td>13.75</td> <td>35.06</td> <td>0.00</td> <td>100</td> <td>332</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5775.00	106.02	-----	-----	93.63	33.70	13.75	35.06	0.00	100	332	PEAK																																				
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																				
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5775.00	106.02	-----	-----	93.63	33.70	13.75	35.06	0.00	100	332	PEAK																																																																		
<b>Blank</b>																																																																													
<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5775.00</td> <td>100.70</td> <td>-----</td> <td>-----</td> <td>88.31</td> <td>33.70</td> <td>13.75</td> <td>35.06</td> <td>0.00</td> <td>100</td> <td>332</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5775.00	100.70	-----	-----	88.31	33.70	13.75	35.06	0.00	100	332	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																					
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5775.00	100.70	-----	-----	88.31	33.70	13.75	35.06	0.00	100	332	AVERAGE																																																																		



Mode	73																																																																	
	Band Edge - R																																																																	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz																																																																	
ANT	1+2																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	<p>Site : 03CH21-HY          Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.98</td> <td>63.67</td> <td>110.06</td> <td>-47.19</td> <td>51.25</td> <td>33.70</td> <td>13.86</td> <td>35.14</td> <td>0.00</td> <td>100</td> <td>332 PEAK</td> </tr> <tr> <td>2 5874.40</td> <td>63.42</td> <td>105.37</td> <td>-41.95</td> <td>50.99</td> <td>33.70</td> <td>13.88</td> <td>35.15</td> <td>0.00</td> <td>100</td> <td>332 PEAK</td> </tr> <tr> <td>3 5924.98</td> <td>51.95</td> <td>68.22</td> <td>-16.27</td> <td>39.56</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>100</td> <td>332 PEAK</td> </tr> <tr> <td>4 5925.68</td> <td>53.19</td> <td>68.20</td> <td>-15.01</td> <td>40.00</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>100</td> <td>332 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1 5854.98	63.67	110.06	-47.19	51.25	33.70	13.86	35.14	0.00	100	332 PEAK	2 5874.40	63.42	105.37	-41.95	50.99	33.70	13.88	35.15	0.00	100	332 PEAK	3 5924.98	51.95	68.22	-16.27	39.56	33.65	13.94	35.20	0.00	100	332 PEAK	4 5925.68	53.19	68.20	-15.01	40.00	33.65	13.94	35.20	0.00	100	332 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																								
1 5854.98	63.67	110.06	-47.19	51.25	33.70	13.86	35.14	0.00	100	332 PEAK																																																								
2 5874.40	63.42	105.37	-41.95	50.99	33.70	13.88	35.15	0.00	100	332 PEAK																																																								
3 5924.98	51.95	68.22	-16.27	39.56	33.65	13.94	35.20	0.00	100	332 PEAK																																																								
4 5925.68	53.19	68.20	-15.01	40.00	33.65	13.94	35.20	0.00	100	332 PEAK																																																								





Mode	73																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz																																																																																																																						
ANT	1+2																																																																																																																						
Pol.	Vertical	Fundamental																																																																																																																					
Peak	<p>Site : 03CH21-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5640.13</td> <td>60.87</td> <td>68.20</td> <td>-7.33</td> <td>49.03</td> <td>33.19</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>100</td> <td>280</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.23</td> <td>62.46</td> <td>68.37</td> <td>-5.91</td> <td>50.61</td> <td>33.20</td> <td>13.61</td> <td>34.96</td> <td>0.00</td> <td>100</td> <td>280</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.15</td> <td>72.53</td> <td>105.52</td> <td>-32.99</td> <td>60.36</td> <td>33.50</td> <td>13.67</td> <td>35.00</td> <td>0.00</td> <td>100</td> <td>280</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>74.47</td> <td>111.71</td> <td>-37.24</td> <td>62.22</td> <td>33.58</td> <td>13.69</td> <td>35.02</td> <td>0.00</td> <td>100</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5640.13	60.87	68.20	-7.33	49.03	33.19	13.61	34.96	0.00	100	280	PEAK	2	5650.23	62.46	68.37	-5.91	50.61	33.20	13.61	34.96	0.00	100	280	PEAK	3	5701.15	72.53	105.52	-32.99	60.36	33.50	13.67	35.00	0.00	100	280	PEAK	4	5720.40	74.47	111.71	-37.24	62.22	33.58	13.69	35.02	0.00	100	280	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>115.08</td> <td>-----</td> <td>-----</td> <td>102.69</td> <td>33.70</td> <td>13.75</td> <td>35.06</td> <td>0.00</td> <td>100</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	115.08	-----	-----	102.69	33.70	13.75	35.06	0.00	100	280	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5640.13	60.87	68.20	-7.33	49.03	33.19	13.61	34.96	0.00	100	280	PEAK																																																																																																											
2	5650.23	62.46	68.37	-5.91	50.61	33.20	13.61	34.96	0.00	100	280	PEAK																																																																																																											
3	5701.15	72.53	105.52	-32.99	60.36	33.50	13.67	35.00	0.00	100	280	PEAK																																																																																																											
4	5720.40	74.47	111.71	-37.24	62.22	33.58	13.69	35.02	0.00	100	280	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5775.00	115.08	-----	-----	102.69	33.70	13.75	35.06	0.00	100	280	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>109.21</td> <td>-----</td> <td>-----</td> <td>96.81</td> <td>33.70</td> <td>13.77</td> <td>35.07</td> <td>0.00</td> <td>100</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	109.21	-----	-----	96.81	33.70	13.77	35.07	0.00	100	280	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	Apos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5775.00	109.21	-----	-----	96.81	33.70	13.77	35.07	0.00	100	280	AVERAGE																																																																																																											



Mode	73																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz																																																																															
ANT	1+2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 03CH21-HY          Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C03A18EN_240711 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.63</td> <td>72.04</td> <td>111.65</td> <td>-39.61</td> <td>59.61</td> <td>33.70</td> <td>13.86</td> <td>35.13</td> <td>0.00</td> <td>100</td> <td>200</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.88</td> <td>68.63</td> <td>105.51</td> <td>-36.88</td> <td>56.20</td> <td>33.70</td> <td>13.88</td> <td>35.15</td> <td>0.00</td> <td>100</td> <td>200</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.28</td> <td>61.95</td> <td>68.73</td> <td>-6.78</td> <td>49.55</td> <td>33.65</td> <td>13.94</td> <td>35.19</td> <td>0.00</td> <td>100</td> <td>200</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5926.38</td> <td>57.98</td> <td>68.20</td> <td>-10.22</td> <td>45.59</td> <td>33.65</td> <td>13.94</td> <td>35.20</td> <td>0.00</td> <td>100</td> <td>200</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5854.63	72.04	111.65	-39.61	59.61	33.70	13.86	35.13	0.00	100	200	PEAK	2	5873.88	68.63	105.51	-36.88	56.20	33.70	13.88	35.15	0.00	100	200	PEAK	3	5924.28	61.95	68.73	-6.78	49.55	33.65	13.94	35.19	0.00	100	200	PEAK	4	5926.38	57.98	68.20	-10.22	45.59	33.65	13.94	35.20	0.00	100	200	PEAK	Blank
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5854.63	72.04	111.65	-39.61	59.61	33.70	13.86	35.13	0.00	100	200	PEAK																																																																				
2	5873.88	68.63	105.51	-36.88	56.20	33.70	13.88	35.15	0.00	100	200	PEAK																																																																				
3	5924.28	61.95	68.73	-6.78	49.55	33.65	13.94	35.19	0.00	100	200	PEAK																																																																				
4	5926.38	57.98	68.20	-10.22	45.59	33.65	13.94	35.20	0.00	100	200	PEAK																																																																				



Mode	73																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>51.97</td> <td>74.00</td> <td>-22.03</td> <td>34.18</td> <td>38.50</td> <td>19.55</td> <td>40.69</td> <td>0.43</td> <td>100</td> <td>187</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11550.00</td> <td>42.52</td> <td>54.00</td> <td>-11.48</td> <td>24.73</td> <td>38.50</td> <td>19.55</td> <td>40.69</td> <td>0.43</td> <td>100</td> <td>187</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17325.00</td> <td>52.49</td> <td>68.20</td> <td>-15.71</td> <td>35.42</td> <td>39.90</td> <td>24.08</td> <td>47.37</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	51.97	74.00	-22.03	34.18	38.50	19.55	40.69	0.43	100	187	PEAK	2	11550.00	42.52	54.00	-11.48	24.73	38.50	19.55	40.69	0.43	100	187	AVERAGE	3	17325.00	52.49	68.20	-15.71	35.42	39.90	24.08	47.37	0.46	--	--	PEAK	<p>Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>51.86</td> <td>74.00</td> <td>-22.14</td> <td>34.07</td> <td>38.50</td> <td>19.55</td> <td>40.69</td> <td>0.43</td> <td>100</td> <td>174</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11550.00</td> <td>42.26</td> <td>54.00</td> <td>-11.74</td> <td>24.47</td> <td>38.50</td> <td>19.55</td> <td>40.69</td> <td>0.43</td> <td>100</td> <td>174</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17325.00</td> <td>52.11</td> <td>68.20</td> <td>-16.09</td> <td>35.04</td> <td>39.90</td> <td>24.08</td> <td>47.37</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	51.86	74.00	-22.14	34.07	38.50	19.55	40.69	0.43	100	174	PEAK	2	11550.00	42.26	54.00	-11.74	24.47	38.50	19.55	40.69	0.43	100	174	AVERAGE	3	17325.00	52.11	68.20	-16.09	35.04	39.90	24.08	47.37	0.46	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11550.00	51.97	74.00	-22.03	34.18	38.50	19.55	40.69	0.43	100	187	PEAK																																																																																																																												
2	11550.00	42.52	54.00	-11.48	24.73	38.50	19.55	40.69	0.43	100	187	AVERAGE																																																																																																																												
3	17325.00	52.49	68.20	-15.71	35.42	39.90	24.08	47.37	0.46	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11550.00	51.86	74.00	-22.14	34.07	38.50	19.55	40.69	0.43	100	174	PEAK																																																																																																																												
2	11550.00	42.26	54.00	-11.74	24.47	38.50	19.55	40.69	0.43	100	174	AVERAGE																																																																																																																												
3	17325.00	52.11	68.20	-16.09	35.04	39.90	24.08	47.37	0.46	--	--	PEAK																																																																																																																												



	<b>73</b>	
<b>Mode</b>	<b>Harmonic</b>	
	<b>U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz</b>	
<b>ANT</b>	<b>1+2</b>	
<b>Pol.</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>10.6G ~18G Avg</b>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL</p>	<p>Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL</p>



Mode	74																																																																																																																																																																																							
	LF																																																																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHZ																																																																																																																																																																																							
ANT	1+2																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
QP/ Peak	<p>Site : 03CH21-HY Condition: QP 3m LF_633038001_231015 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>33.88</td><td>21.37</td><td>40.00</td><td>-18.63</td><td>30.07</td><td>22.99</td><td>0.92</td><td>32.64</td><td>0.03</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>106.63</td><td>21.82</td><td>43.50</td><td>-21.68</td><td>36.12</td><td>16.58</td><td>1.77</td><td>32.68</td><td>0.03</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>264.74</td><td>20.80</td><td>46.00</td><td>-25.20</td><td>30.54</td><td>19.90</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>418.97</td><td>28.08</td><td>46.00</td><td>-17.92</td><td>34.58</td><td>22.58</td><td>3.60</td><td>32.78</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>716.76</td><td>32.53</td><td>46.00</td><td>-13.47</td><td>33.42</td><td>27.12</td><td>4.70</td><td>32.85</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>959.26</td><td>33.91</td><td>46.00</td><td>-12.09</td><td>28.36</td><td>31.20</td><td>5.47</td><td>31.32</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	33.88	21.37	40.00	-18.63	30.07	22.99	0.92	32.64	0.03	--	--	Peak	2	106.63	21.82	43.50	-21.68	36.12	16.58	1.77	32.68	0.03	--	--	Peak	3	264.74	20.80	46.00	-25.20	30.54	19.90	2.84	32.63	0.07	--	--	Peak	4	418.97	28.08	46.00	-17.92	34.58	22.58	3.60	32.78	0.10	--	--	Peak	5	716.76	32.53	46.00	-13.47	33.42	27.12	4.70	32.85	0.14	--	--	Peak	6	959.26	33.91	46.00	-12.09	28.36	31.20	5.47	31.32	0.20	--	--	Peak	<p>Site : 03CH21-HY Condition: QP 3m LF_633038001_231015 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>32.91</td><td>29.50</td><td>40.00</td><td>-10.50</td><td>37.81</td><td>23.40</td><td>0.90</td><td>32.64</td><td>0.03</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>208.48</td><td>23.05</td><td>43.50</td><td>-20.45</td><td>37.94</td><td>15.15</td><td>2.52</td><td>32.62</td><td>0.06</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>262.80</td><td>20.75</td><td>46.00</td><td>-25.25</td><td>30.41</td><td>20.08</td><td>2.82</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>418.97</td><td>29.17</td><td>46.00</td><td>-16.83</td><td>35.67</td><td>22.58</td><td>3.60</td><td>32.78</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>718.70</td><td>39.12</td><td>46.00</td><td>-6.88</td><td>39.85</td><td>27.26</td><td>4.71</td><td>32.84</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>903.00</td><td>35.94</td><td>46.00</td><td>-10.06</td><td>33.38</td><td>29.03</td><td>5.33</td><td>31.90</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	32.91	29.50	40.00	-10.50	37.81	23.40	0.90	32.64	0.03	--	--	Peak	2	208.48	23.05	43.50	-20.45	37.94	15.15	2.52	32.62	0.06	--	--	Peak	3	262.80	20.75	46.00	-25.25	30.41	20.08	2.82	32.63	0.07	--	--	Peak	4	418.97	29.17	46.00	-16.83	35.67	22.58	3.60	32.78	0.10	--	--	Peak	5	718.70	39.12	46.00	-6.88	39.85	27.26	4.71	32.84	0.14	--	--	Peak	6	903.00	35.94	46.00	-10.06	33.38	29.03	5.33	31.90	0.10	--	--	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																											
1	33.88	21.37	40.00	-18.63	30.07	22.99	0.92	32.64	0.03	--	--	Peak																																																																																																																																																																												
2	106.63	21.82	43.50	-21.68	36.12	16.58	1.77	32.68	0.03	--	--	Peak																																																																																																																																																																												
3	264.74	20.80	46.00	-25.20	30.54	19.90	2.84	32.63	0.07	--	--	Peak																																																																																																																																																																												
4	418.97	28.08	46.00	-17.92	34.58	22.58	3.60	32.78	0.10	--	--	Peak																																																																																																																																																																												
5	716.76	32.53	46.00	-13.47	33.42	27.12	4.70	32.85	0.14	--	--	Peak																																																																																																																																																																												
6	959.26	33.91	46.00	-12.09	28.36	31.20	5.47	31.32	0.20	--	--	Peak																																																																																																																																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	32.91	29.50	40.00	-10.50	37.81	23.40	0.90	32.64	0.03	--	--	Peak																																																																																																																																																																												
2	208.48	23.05	43.50	-20.45	37.94	15.15	2.52	32.62	0.06	--	--	Peak																																																																																																																																																																												
3	262.80	20.75	46.00	-25.25	30.41	20.08	2.82	32.63	0.07	--	--	Peak																																																																																																																																																																												
4	418.97	29.17	46.00	-16.83	35.67	22.58	3.60	32.78	0.10	--	--	Peak																																																																																																																																																																												
5	718.70	39.12	46.00	-6.88	39.85	27.26	4.71	32.84	0.14	--	--	Peak																																																																																																																																																																												
6	903.00	35.94	46.00	-10.06	33.38	29.03	5.33	31.90	0.10	--	--	Peak																																																																																																																																																																												




Mode	75																																																																																																																																							
	SHF																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak	<p>Site : 03CH21-HY Condition: PEAK_74 1m 88HA9170_1223_240622 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>24611.50</td> <td>41.56</td> <td>74.00</td> <td>-32.44</td> <td>42.88</td> <td>39.35</td> <td>29.01</td> <td>60.14</td> <td>-9.54</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>38833.91</td> <td>51.47</td> <td>74.00</td> <td>-22.53</td> <td>39.92</td> <td>44.10</td> <td>37.56</td> <td>60.57</td> <td>-9.54</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>38833.91</td> <td>41.69</td> <td>54.00</td> <td>-12.31</td> <td>30.14</td> <td>44.10</td> <td>37.56</td> <td>60.57</td> <td>-9.54</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24611.50	41.56	74.00	-32.44	42.88	39.35	29.01	60.14	-9.54	--	--	PEAK	2	38833.91	51.47	74.00	-22.53	39.92	44.10	37.56	60.57	-9.54	--	--	PEAK	3	38833.91	41.69	54.00	-12.31	30.14	44.10	37.56	60.57	-9.54	--	--	AVERAGE	<p>Site : 03CH21-HY Condition: PEAK_74 1m 88HA9170_1223_240622 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>24169.90</td> <td>40.07</td> <td>74.00</td> <td>-33.93</td> <td>42.29</td> <td>38.72</td> <td>28.77</td> <td>60.17</td> <td>-9.54</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>38584.39</td> <td>50.63</td> <td>74.00</td> <td>-23.37</td> <td>39.32</td> <td>43.87</td> <td>37.35</td> <td>60.37</td> <td>-9.54</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>38584.39</td> <td>41.19</td> <td>54.00</td> <td>-12.81</td> <td>29.88</td> <td>43.87</td> <td>37.35</td> <td>60.37</td> <td>-9.54</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24169.90	40.07	74.00	-33.93	42.29	38.72	28.77	60.17	-9.54	--	--	PEAK	2	38584.39	50.63	74.00	-23.37	39.32	43.87	37.35	60.37	-9.54	--	--	PEAK	3	38584.39	41.19	54.00	-12.81	29.88	43.87	37.35	60.37	-9.54	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	24611.50	41.56	74.00	-32.44	42.88	39.35	29.01	60.14	-9.54	--	--	PEAK																																																																																																																												
2	38833.91	51.47	74.00	-22.53	39.92	44.10	37.56	60.57	-9.54	--	--	PEAK																																																																																																																												
3	38833.91	41.69	54.00	-12.31	30.14	44.10	37.56	60.57	-9.54	--	--	AVERAGE																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	24169.90	40.07	74.00	-33.93	42.29	38.72	28.77	60.17	-9.54	--	--	PEAK																																																																																																																												
2	38584.39	50.63	74.00	-23.37	39.32	43.87	37.35	60.37	-9.54	--	--	PEAK																																																																																																																												
3	38584.39	41.19	54.00	-12.81	29.88	43.87	37.35	60.37	-9.54	--	--	AVERAGE																																																																																																																												



## Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1+2	802.11a	95.88	1980	0.51	560Hz
1+2	5GHz 802.11n HT20	80.18	5420	0.18	200Hz
1+2	5GHz 802.11n HT40	80.18	5420	0.18	200Hz
1+2	5GHz 802.11ac VHT80	80.24	5440	0.18	200Hz
1+2	5GHz 802.11ax HE20 Full RU	80.00	5440	0.18	200Hz
1+2	5GHz 802.11ax HE40 Full RU	79.94	5420	0.18	200Hz
1+2	5GHz 802.11ax HE80 Full RU	80.18	5420	0.18	200Hz

### MIMO <Ant. 1+2>

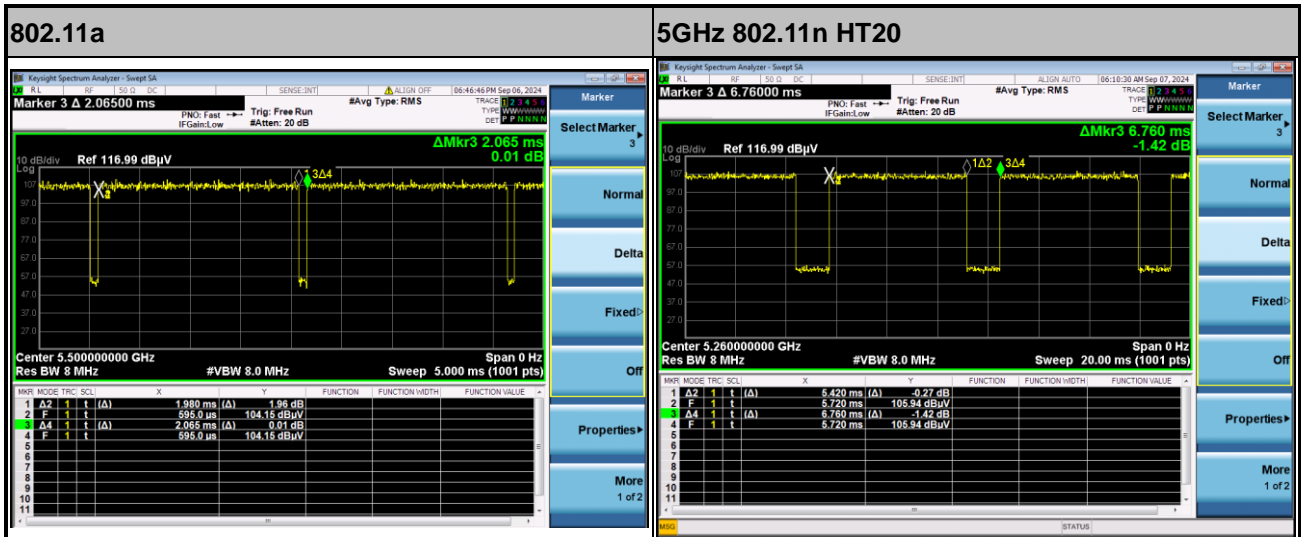





5GHz 802.11n HT40

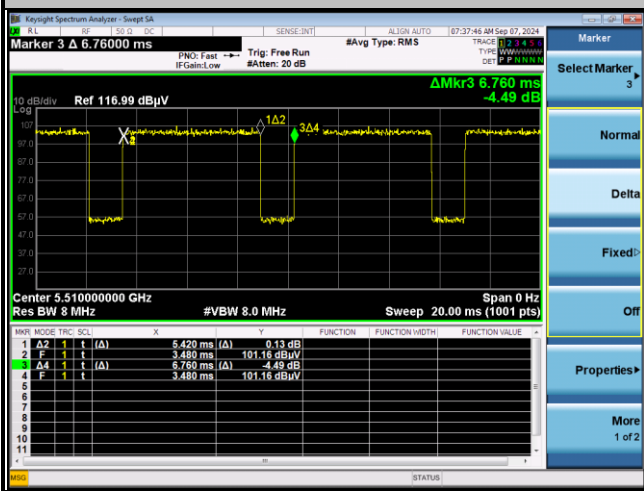


5GHz 802.11ac VHT80

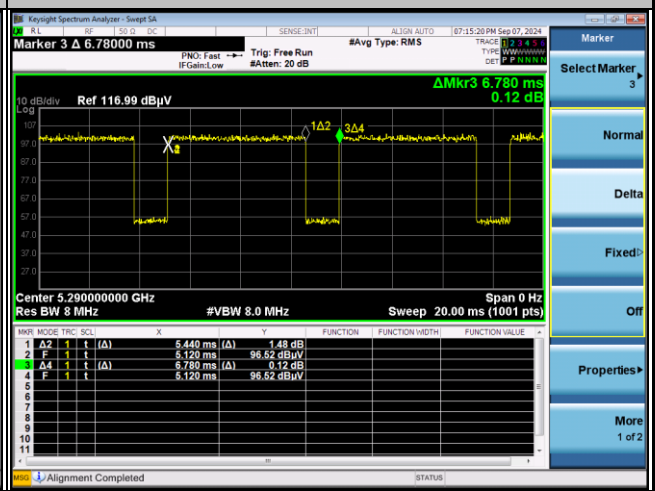


5GHz 802.11ax HE20 Full RU

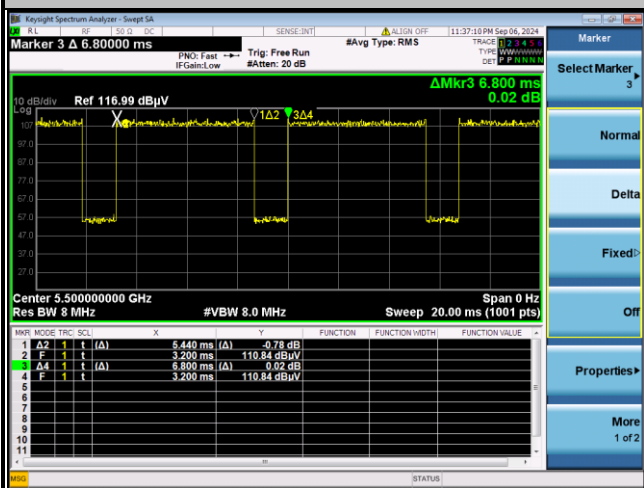

5GHz 802.11ax HE40 Full RU

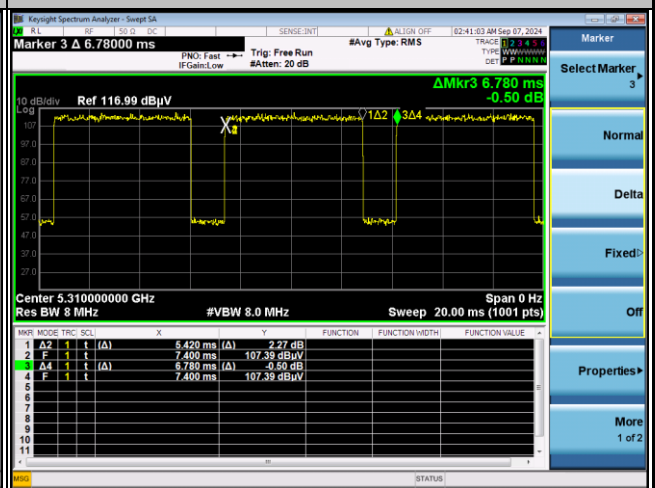

5GHz 802.11ax HE80 Full RU

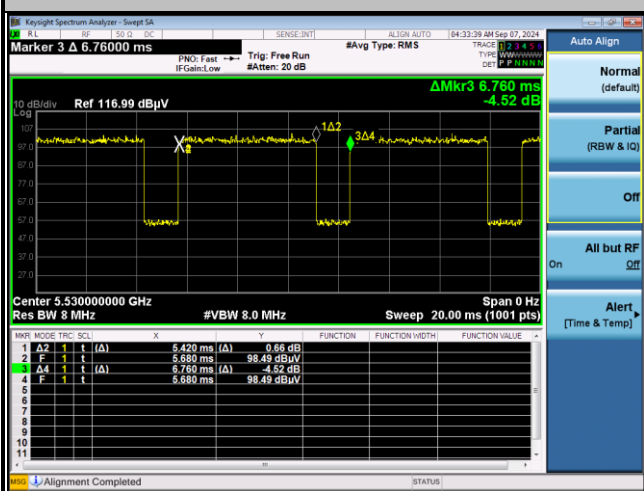




## Appendix E. Setup Photographs


### <Conducted Emission>

Remote View



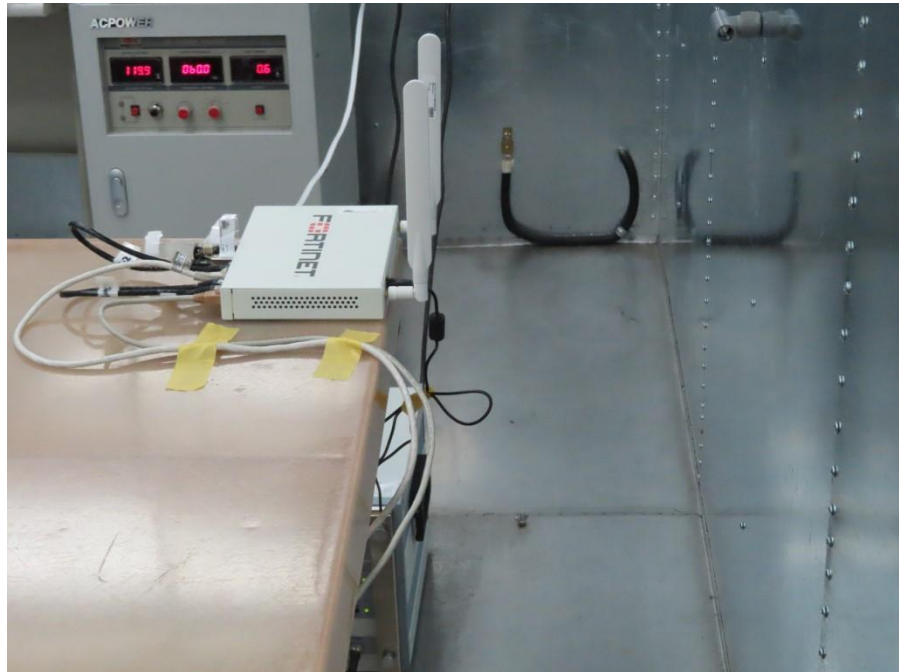


Rear View

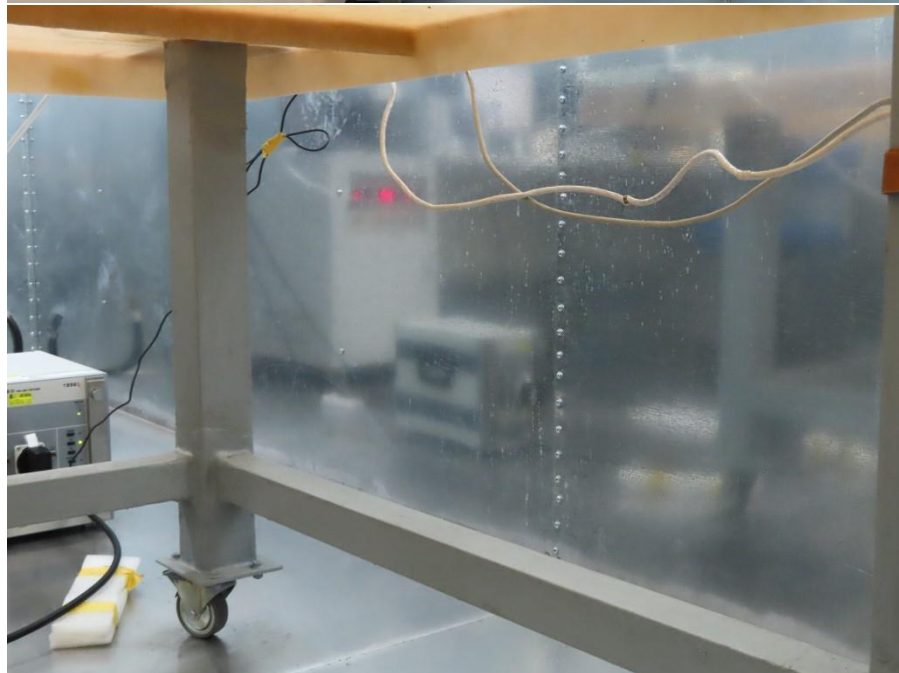

<Radiated Emission>

Ant. 90°


LF

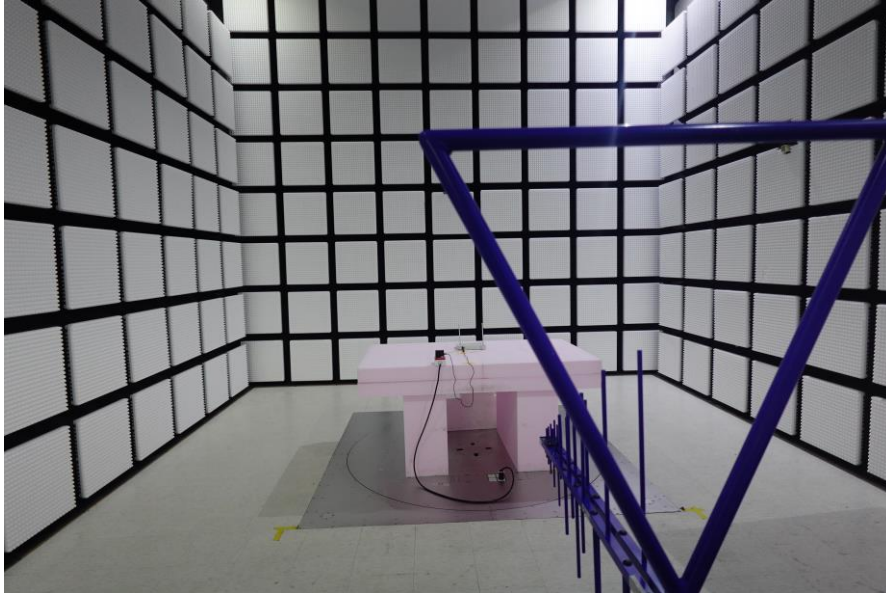

HF



SHF

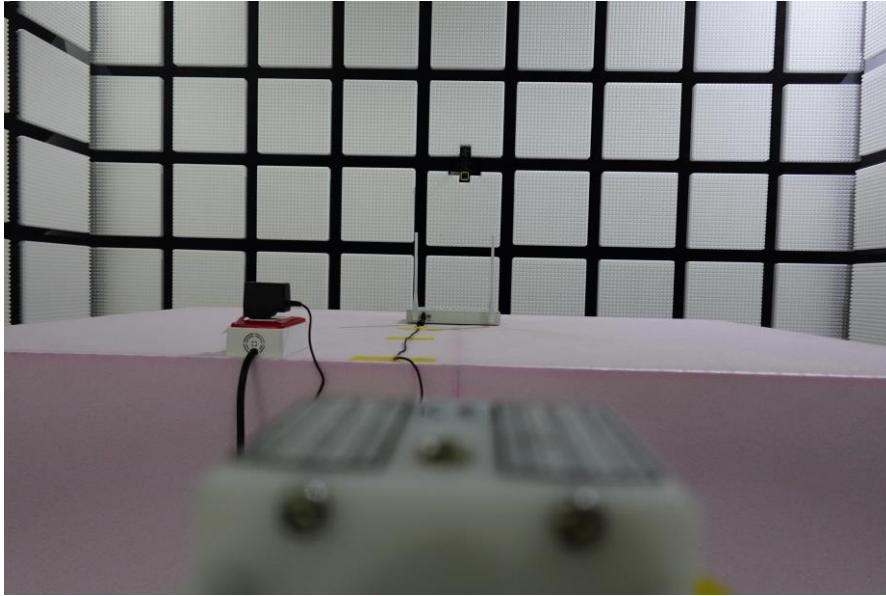

————THE END————