



# FCC RADIO TEST REPORT

FCC ID : TVE-240701  
Equipment : Network Switch  
Brand Name : FORTINET **FORTINET**  
Model Name : FortiSwitch 124Gxxxxxxxxxx,  
FORTISWITCH-124Gxxxxxxxxxx, FS-124Gxxxxxxxxxx,  
(where "x" can be used as "A-Z", or "0-9", or "-", or  
blank for software changes or marketing purposes only)  
Marketing Name : FortiSwitch 124G  
Applicant : Fortinet, Inc.  
909 Kifer Road, Sunnyvale, CA. 94086 USA  
Manufacturer : Fortinet, Inc.  
909 Kifer Road, Sunnyvale, CA. 94086 USA  
Standard : FCC Part 15 Subpart C §15.247

The product was received on May 17, 2024 and testing was performed from Jun. 15, 2024 to Nov. 12, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	5
1.4 Applicable Standards.....	5
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>6</b>
2.1 Carrier Frequency Channel .....	6
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system .....	8
2.5 EUT Operation Test Setup .....	8
2.6 Measurement Results Explanation Example.....	9
<b>3 Test Result.....</b>	<b>10</b>
3.1 6dB and 99% Bandwidth Measurement .....	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement .....	12
3.4 Conducted Band Edges and Spurious Emission Measurement .....	13
3.5 Radiated Band Edges and Spurious Emission Measurement .....	14
3.6 AC Conducted Emission Measurement.....	18
3.7 Antenna Requirements.....	20
<b>4 List of Measuring Equipment .....</b>	<b>21</b>
<b>5 Measurement Uncertainty .....</b>	<b>23</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	
<b>Appendix F. Setup Photographs</b>	



## History of this test report

Report No.	Version	Description	Issue Date
FR451712-01	01	Initial issue of report	Jan. 10, 2025
FR451712-01	02	Revise Summary of Test Result This report is an updated version, replacing the report issued on Jan. 10, 2025.	Jan. 16, 2025

## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	6.19 dB under the limit at 41.34 MHz
3.6	15.207	AC Conducted Emission	Pass	7.06 dB under the limit at 1.99 MHz
3.7	15.203	Antenna Requirement	Pass	-

**Note:** This model removes the PoE circuit, and the RF module shares the FCC ID: TVE-240701, so the FR451712-01 report reuses the test data from the FR451712 report.

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Peter Liao**

**Report Producer: Rebecca Wu**

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature		
<b>General Specs</b> Bluetooth-LE		
<b>Antenna Type</b> Bluetooth-LE: FPC Antenna		
Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	2.0

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

## 1.2 Modification of EUT

No modifications made to the EUT during the testing.

## 1.3 Testing Location

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	TH05-HY, CO07-HY, 03CH12-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

## 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	37	2402	19	2444
	0	2404	20	2446
	1	2406	21	2448
	2	2408	22	2450
	3	2410	23	2452
	4	2412	24	2454
	5	2414	25	2456
	6	2416	26	2458
	7	2418	27	2460
	8	2420	28	2462
	9	2422	29	2464
	10	2424	30	2466
	38	2426	31	2468
	11	2428	32	2470
	12	2430	33	2472
	13	2432	34	2474
	14	2434	35	2476
	15	2436	36	2478
	16	2438	39	2480
	17	2440	-	-
	18	2442	-	-


## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
<b>Conducted Test Cases</b>	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH37_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH17_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH37_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH17_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
<b>Radiated Test Cases</b>	Mode 1: Bluetooth Tx CH37_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH17_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH37_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH17_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
<b>AC Conducted Emission</b>	Mode 1: Bluetooth-LE TX + LAN Link
<b>Remark:</b> <ol style="list-style-type: none"> <li>For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.</li> <li>Bluetooth-LE 2Mbps does not support primary advertising channels; it does not support channel 00.</li> </ol>	

## 2.3 Connection Diagram of Test System

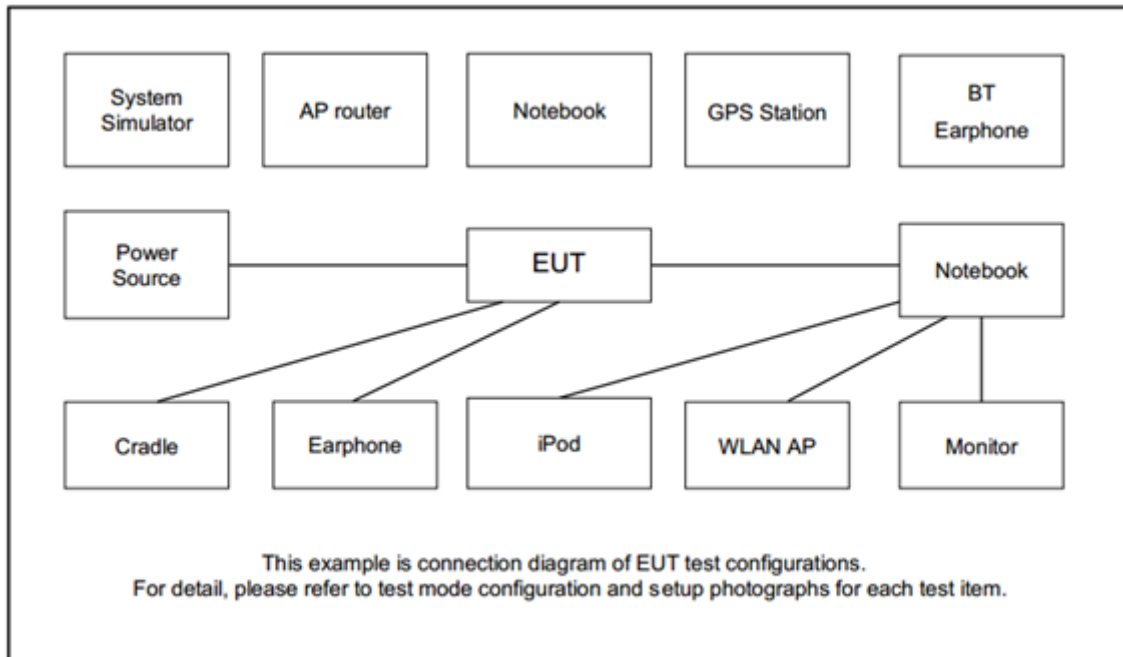

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

## 2.5 EUT Operation Test Setup

The RF test items, utility “SmartRF Studio 8” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.





## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

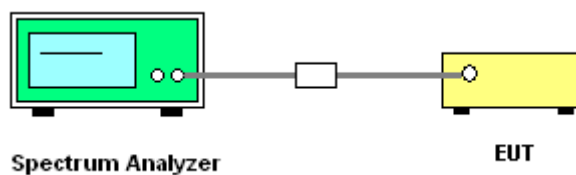

##### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

##### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

## **3.2 Output Power Measurement**

### **3.2.1 Limit of Output Power**

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


### **3.2.2 Measuring Instruments**

Please refer to the measuring equipment list in this test report.

### **3.2.3 Test Procedures**

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

### **3.2.4 Test Setup**

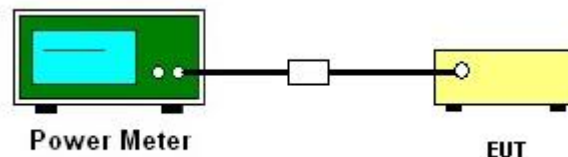

### **3.2.5 Test Result of Average Output Power**

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

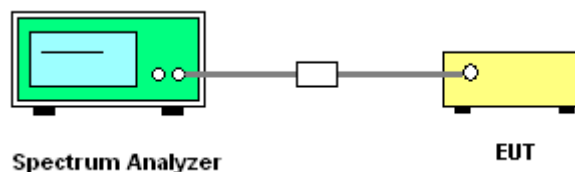

#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


#### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 3.4.4 Test Setup

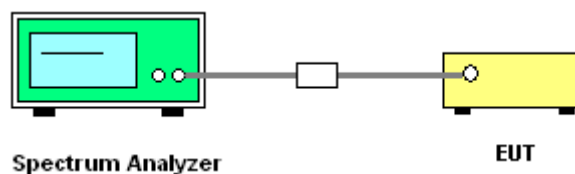

#### 3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

#### 3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

### 3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.For average measurement:
  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated test below 30MHz

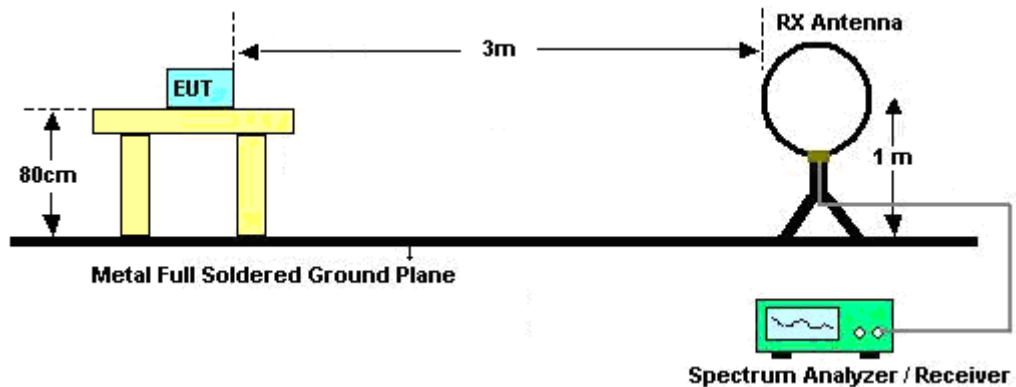

For radiated test from 30MHz to 1GHz

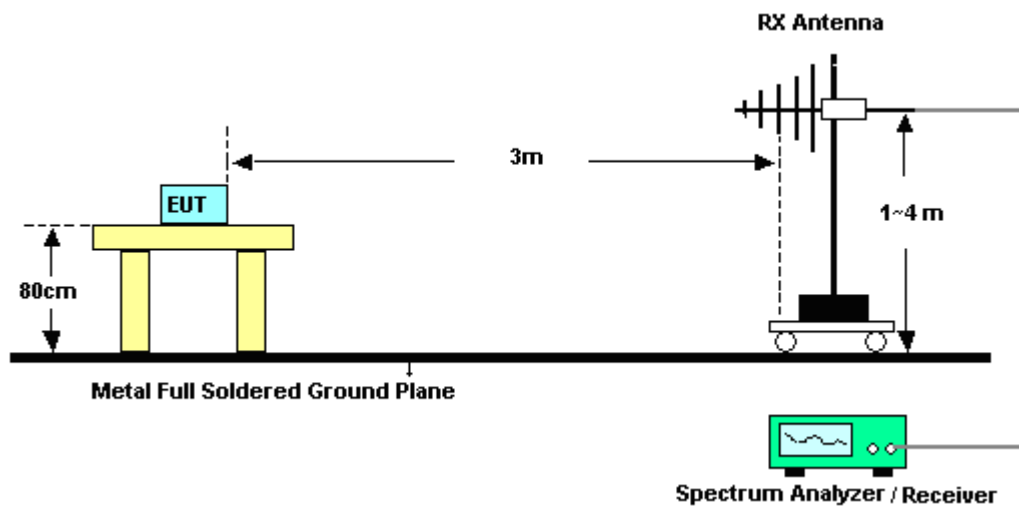


For radiated test from 1GHz to 18GHz

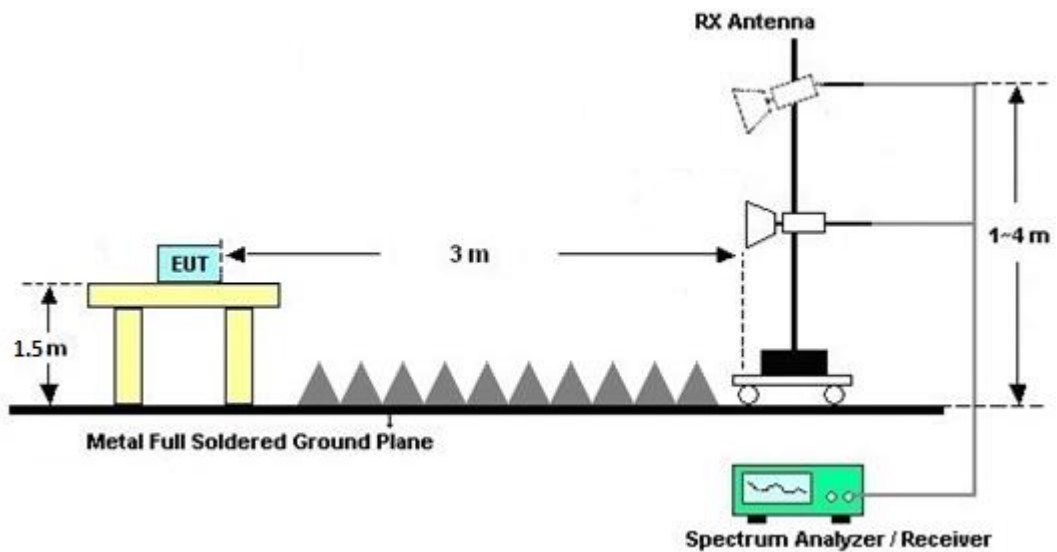



For radiated test above 18GHz

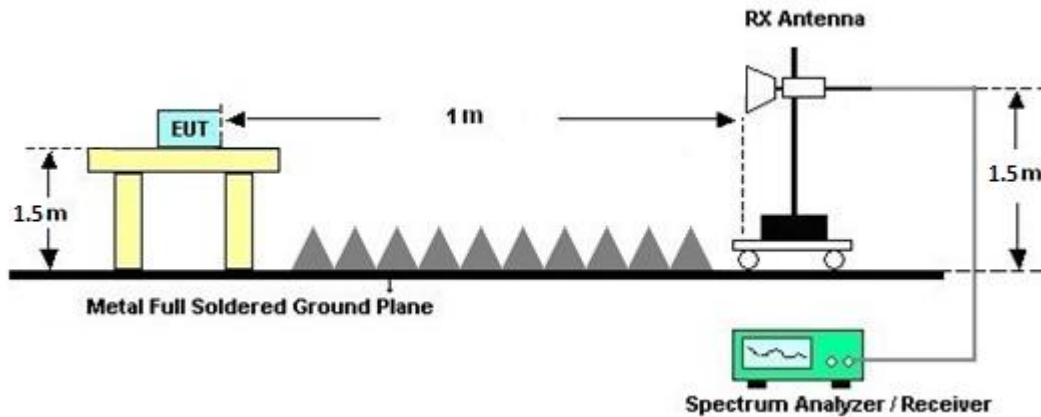

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.5.7 Duty Cycle

Please refer to Appendix E.

### 3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

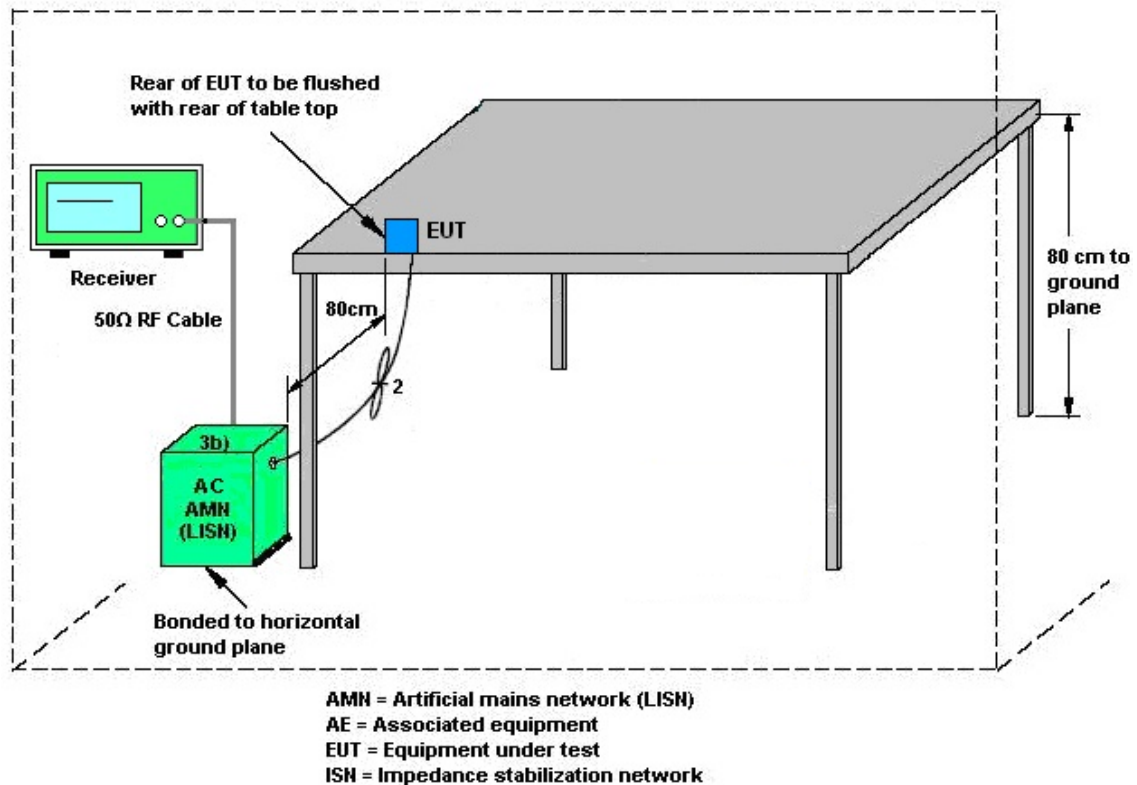

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### **3.7.2 Antenna Anti-Replacement Construction**

Antenna permanently attached.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9kHz~30MHz	Feb. 23, 2024	Jul. 30, 2024~ Sep. 02, 2024	Feb. 22, 2025	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Nov. 03, 2023	Jul. 30, 2024~ Sep. 02, 2024	Nov. 02, 2024	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02114	1GHz~18GHz	Jul. 11, 2024	Jul. 30, 2024~ Sep. 02, 2024	Jul. 10, 2025	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz~40GHz	Nov. 24, 2023	Jul. 30, 2024~ Sep. 02, 2024	Nov. 23, 2024	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 20, 2024	Jul. 30, 2024~ Sep. 02, 2024	Mar. 19, 2025	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	May 22, 2024	Jul. 30, 2024~ Sep. 02, 2024	May 21, 2025	Radiation (03CH12-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18G-5 6-01-A70	EC1900249	1GHz~18GHz	Dec. 20, 2023	Jul. 30, 2024~ Sep. 02, 2024	Dec. 19, 2024	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 07, 2023	Jul. 30, 2024~ Sep. 02, 2024	Dec. 06, 2024	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz~44GHz	May 13, 2024	Jul. 30, 2024~ Sep. 02, 2024	May 12, 2025	Radiation (03CH12-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz~26.5GHz	Aug. 29, 2023	Jul. 30, 2024~ Aug. 27, 2024	Aug. 28, 2024	Radiation (03CH12-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290045	20Hz~8.4GHz	Apr. 17, 2024	Aug. 28, 2024~ Sep. 02, 2024	Apr. 16, 2025	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700-30 00-18000-60SS	SN2	3GHz High Pass Filter	Mar. 13, 2024	Jul. 30, 2024~ Sep. 02, 2024	Mar. 12, 2025	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200-12SS	SN2	1.2GHz Low Pass Filter	Mar. 13, 2024	Jul. 30, 2024~ Sep. 02, 2024	Mar. 12, 2025	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	Jul. 30, 2024~ Sep. 02, 2024	Mar. 05, 2025	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 18, 2023	Jul. 30, 2024~ Sep. 02, 2024	Dec. 17, 2024	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Dec. 18, 2023	Jul. 30, 2024~ Sep. 02, 2024	Dec. 17, 2024	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803953/2	30MHz~40GHz	Dec. 18, 2023	Jul. 30, 2024~ Sep. 02, 2024	Dec. 17, 2024	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP210117	N/A	Oct. 19, 2023	Jul. 30, 2024~ Sep. 02, 2024	Oct. 18, 2024	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jul. 30, 2024~ Sep. 02, 2024	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Jul. 30, 2024~ Sep. 02, 2024	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jul. 30, 2024~ Sep. 02, 2024	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Jul. 30, 2024~ Sep. 02, 2024	N/A	Radiation (03CH12-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Nov. 12, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Nov. 12, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 23, 2024	Nov. 12, 2024	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Nov. 12, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Nov. 12, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Nov. 12, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Nov. 12, 2024	Sep. 22, 2025	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Jun. 15, 2024~ Jul. 30, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3008W	RPR8W-2301 0013 (NO:100)	10MHz~8GHz	Jul. 26, 2023	Jun. 15, 2024~ Jul. 24, 2024	Jul. 25, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3008W	RPR8W-2301 0011 (NO:109)	10MHz~8GHz	Jul. 04, 2024	Jul. 25, 2024~ Jul. 30, 2024	Jul. 03, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2023	Jun. 15, 2024~ Jul. 30, 2024	Aug. 22, 2024	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300485 (BOX4)	N/A	Apr. 08, 2024	Jun. 15, 2024~ Jul. 30, 2024	Apr. 07, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240411	N/A	Conducted Other Test Item	N/A	Jun. 15, 2024~ Jul. 30, 2024	N/A	Conducted (TH05-HY)



## 5 Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.7 dB
--	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.1 dB
--	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.3 dB
--	--------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.8 dB
--	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.3 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Kevin Xiao	Temperature:	21~25	°C
Test Date:	2024/06/15 ~ 2024/07/29	Relative Humidity:	51~54	%

TEST RESULTS DATA								
6dB and 99% Occupied Bandwidth								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	37	2402	1.063	0.690	0.50	Pass
BLE	1Mbps	1	17	2440	1.059	0.686	0.50	Pass
BLE	1Mbps	1	39	2480	1.075	0.704	0.50	Pass
BLE	2Mbps	1	37	2402	2.054	1.409	0.50	Pass
BLE	2Mbps	1	17	2440	2.062	1.260	0.50	Pass
BLE	2Mbps	1	39	2480	2.078	1.379	0.50	Pass

TEST RESULTS DATA										
Average Power Table										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	37	2402	7.00	30.00	2.00	9.00	36.00	Pass
BLE	1Mbps	1	17	2440	6.90	30.00	2.00	8.90	36.00	Pass
BLE	1Mbps	1	39	2480	7.00	30.00	2.00	9.00	36.00	Pass
BLE	2Mbps	1	37	2402	7.00	30.00	2.00	9.00	36.00	Pass
BLE	2Mbps	1	17	2440	6.90	30.00	2.00	8.90	36.00	Pass
BLE	2Mbps	1	39	2480	7.00	30.00	2.00	9.00	36.00	Pass




TEST RESULTS DATA									
Peak Power Density									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	37	2402	7.10	-4.55	2.00	8.00	Pass
BLE	1Mbps	1	17	2440	6.76	-4.73	2.00	8.00	Pass
BLE	1Mbps	1	39	2480	7.19	-5.41	2.00	8.00	Pass
BLE	2Mbps	1	37	2402	6.77	-7.40	2.00	8.00	Pass
BLE	2Mbps	1	17	2440	5.67	-7.84	2.00	8.00	Pass
BLE	2Mbps	1	39	2480	6.28	-7.49	2.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



**6dB Bandwidth**


&lt;1Mbps&gt;

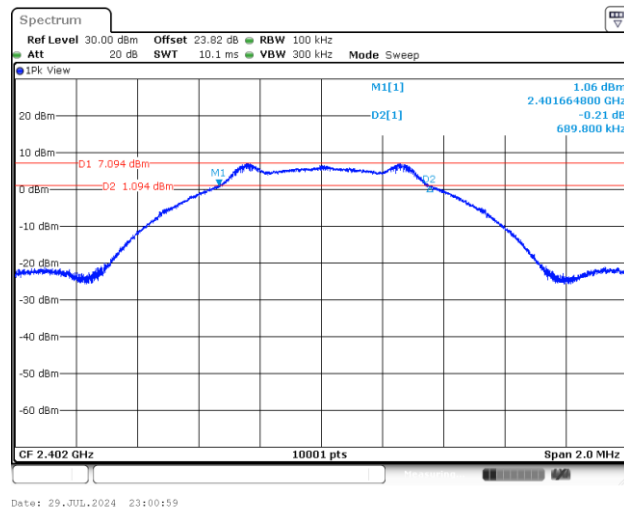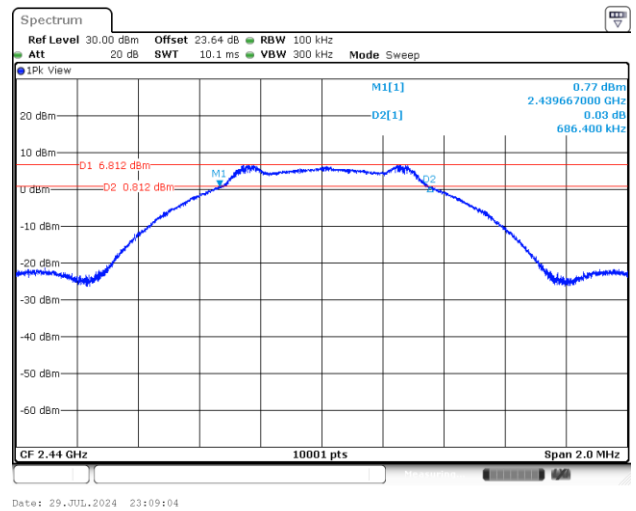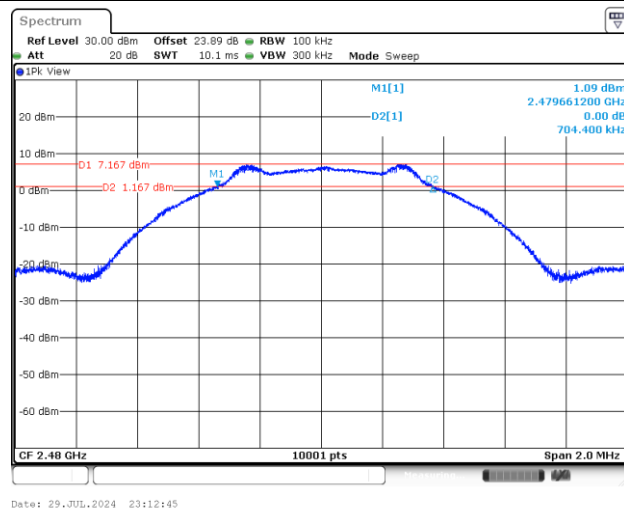**6 dB Bandwidth Plot on Channel 37****6 dB Bandwidth Plot on Channel 17****6 dB Bandwidth Plot on Channel 39**




<2Mbps>


6 dB Bandwidth Plot on Channel 37

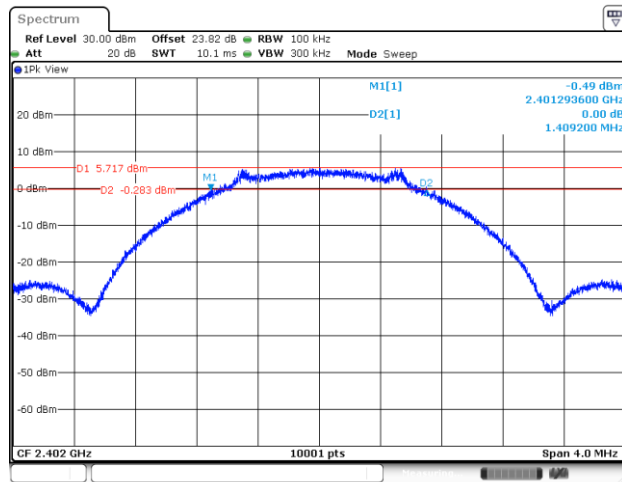

6 dB Bandwidth Plot on Channel 17



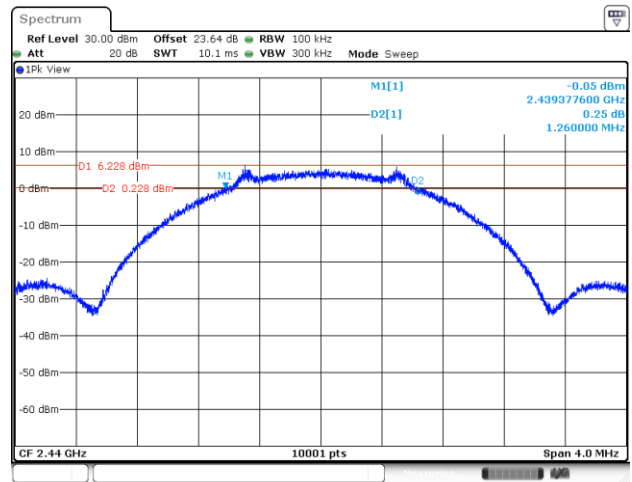


6 dB Bandwidth Plot on Channel 39

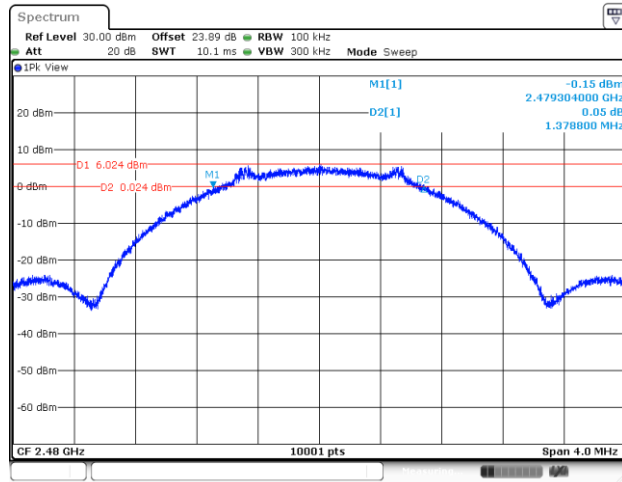

**99% Occupied Bandwidth**


&lt;1Mbps&gt;

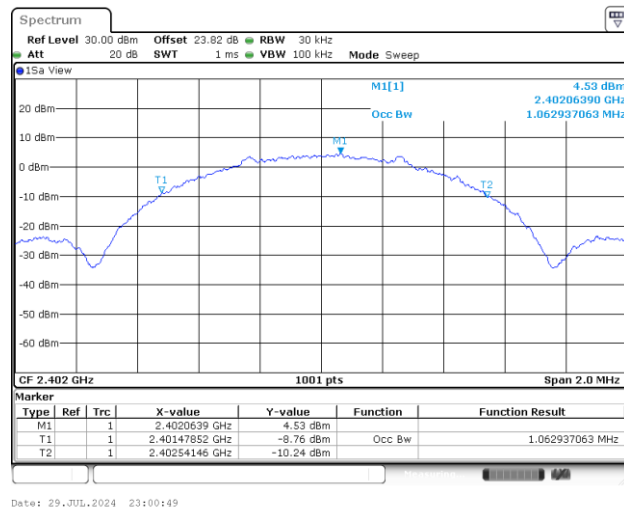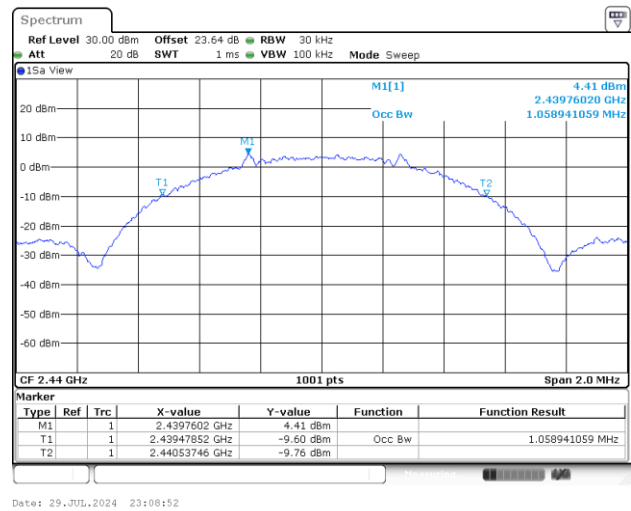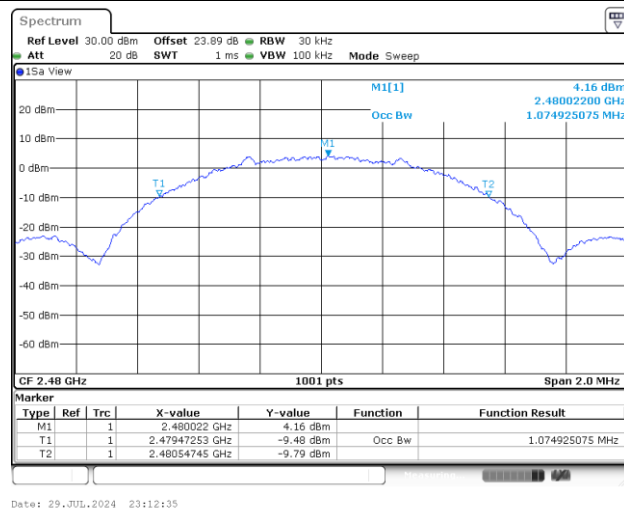**99% Occupied Bandwidth Plot on Channel 37****99% Occupied Bandwidth Plot on Channel 17****99% Occupied Bandwidth Plot on Channel 39**




&lt;2Mbps&gt;


## 99% Occupied Bandwidth Plot on Channel 37

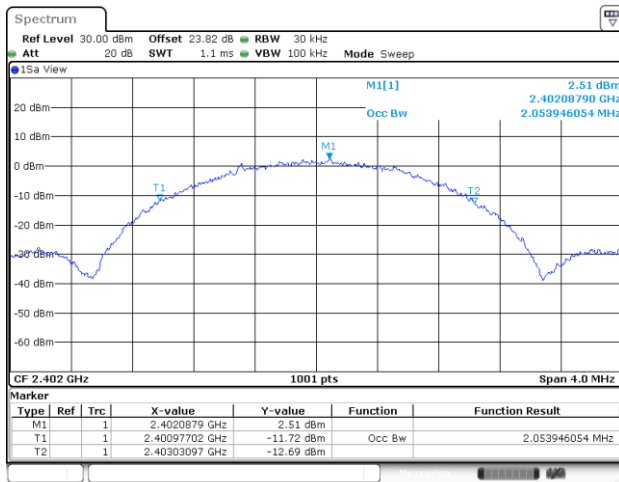

## 99% Occupied Bandwidth Plot on Channel 17



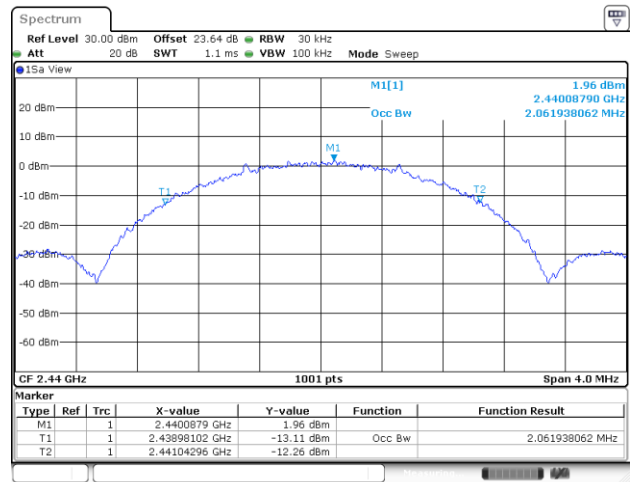


## 99% Occupied Bandwidth Plot on Channel 39

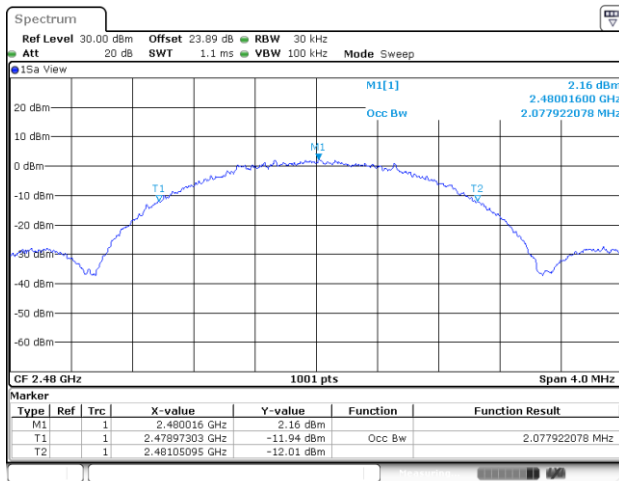

**Power Spectral Density (dBm/3kHz)**


&lt;1Mbps&gt;

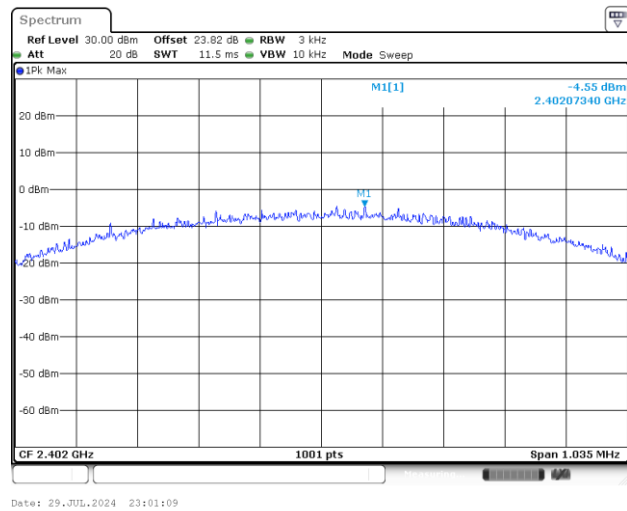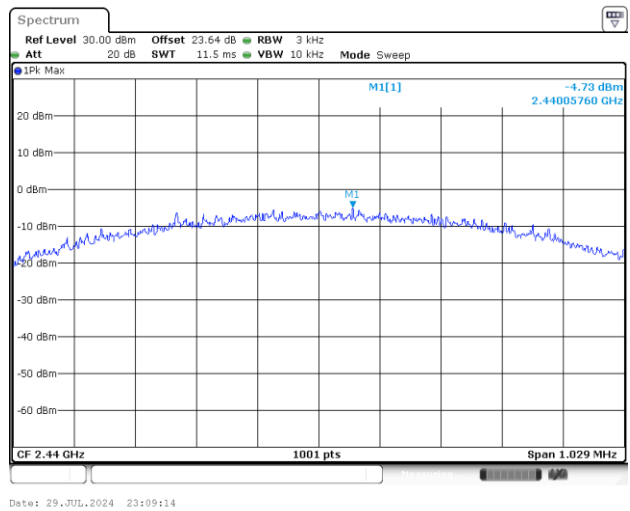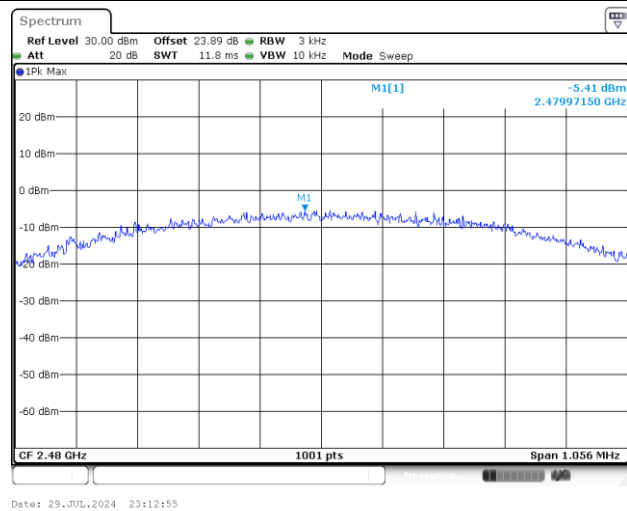**Power Density (dBm/3kHz) Plot Channel 37****Power Density (dBm/3kHz) Plot Channel 17****Power Density (dBm/3kHz) Plot Channel 39**




<2Mbps>


Power Density (dBm/3kHz) Plot Channel 37

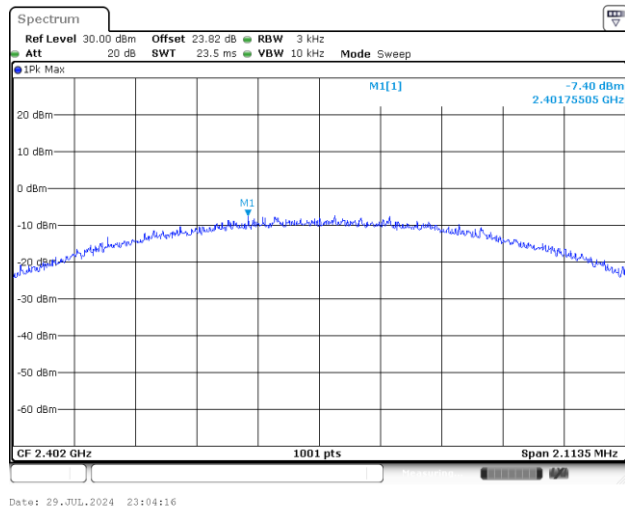

Power Density (dBm/3kHz) Plot Channel 17

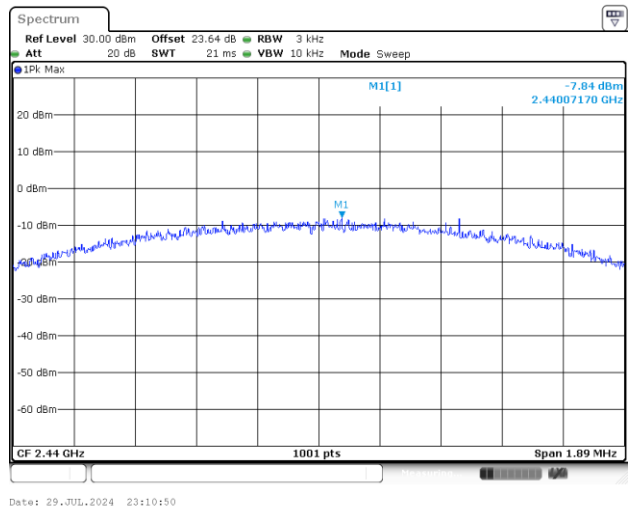


Power Density (dBm/3kHz) Plot Channel 39

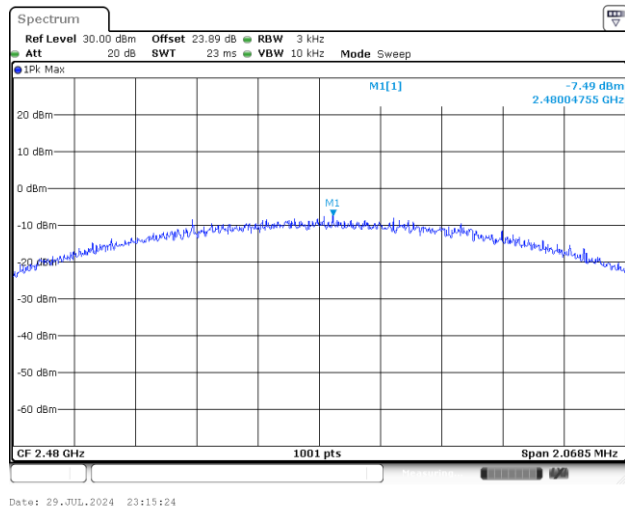



## Band Edge and Conducted Spurious Emission


&lt;1Mbps&gt;

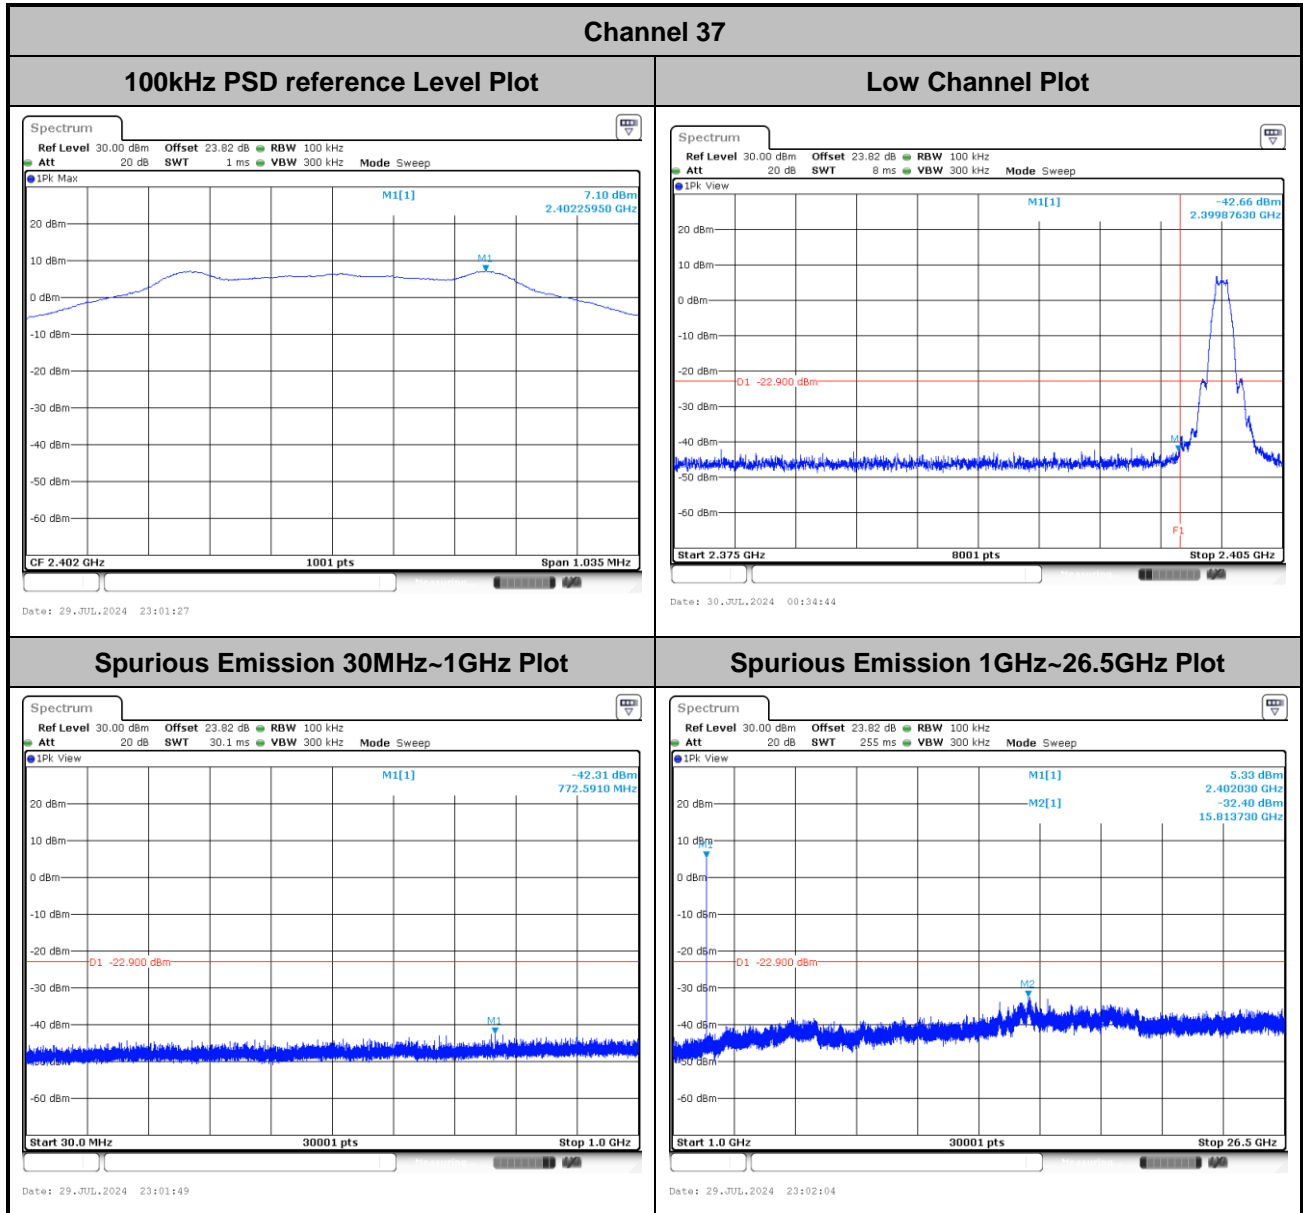




## Channel 17

## 100kHz PSD reference Level Plot

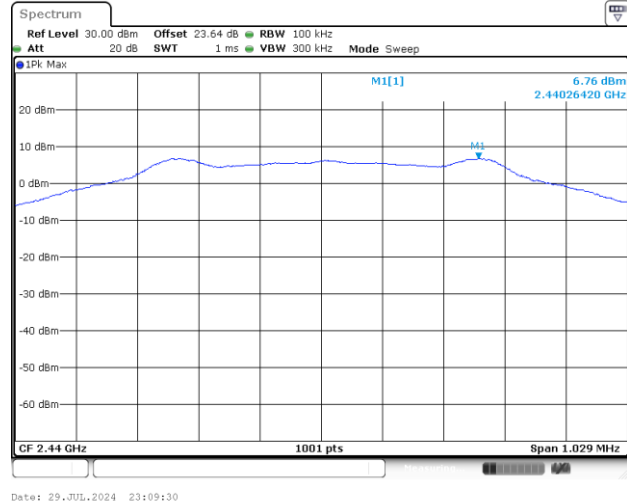


## Mid Channel Plot

## Spurious Emission 30MHz~1GHz Plot

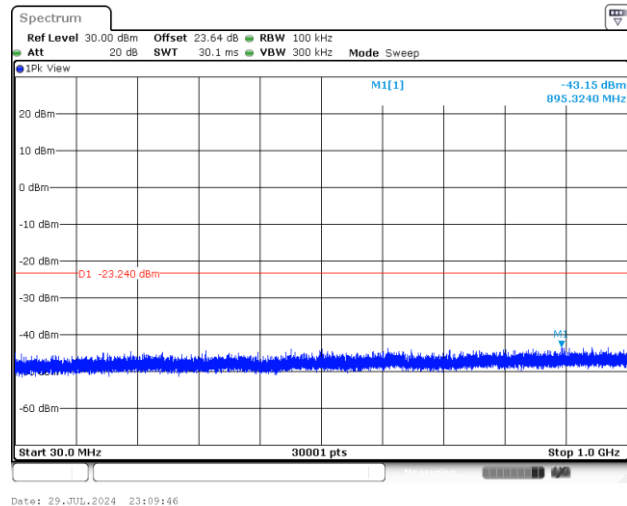

## Spurious Emission 1GHz~26.5GHz Plot

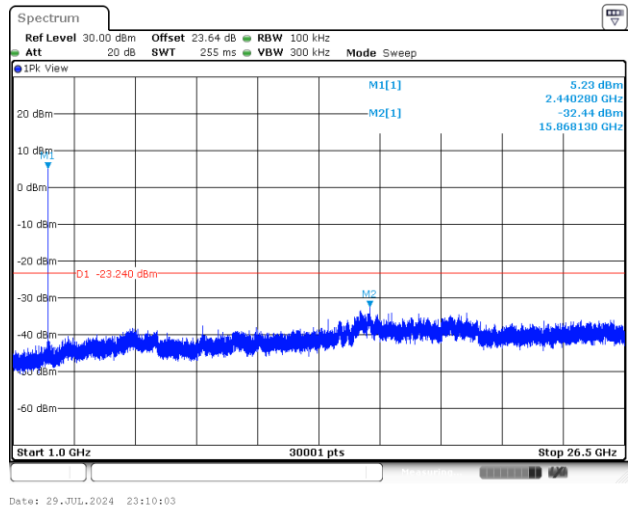







## Channel 39


## 100kHz PSD reference Level Plot

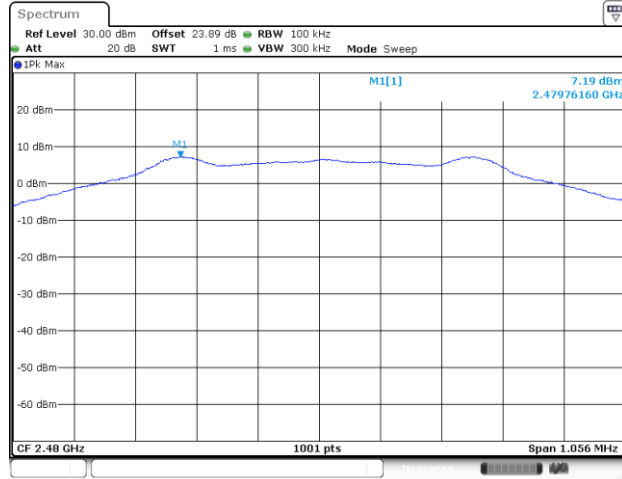


## High Channel Plot

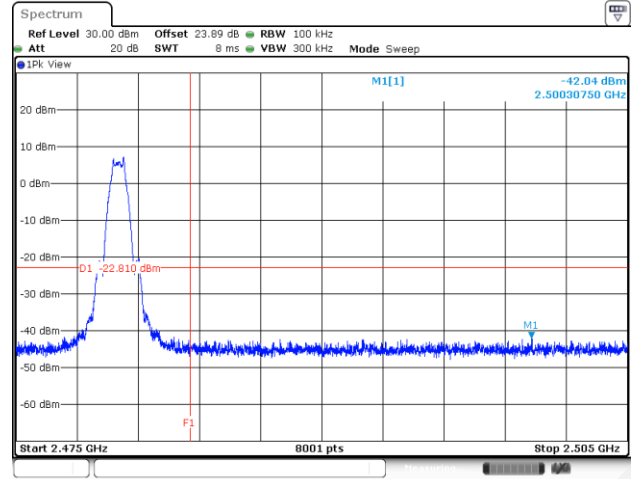

## Spurious Emission 30MHz~1GHz Plot

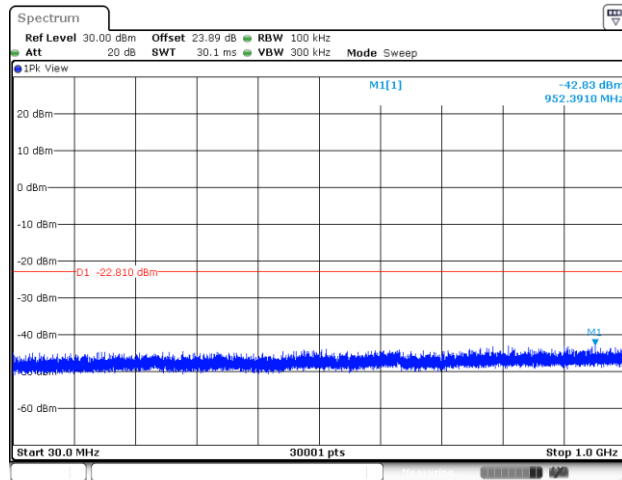

## Spurious Emission 1GHz~26.5GHz Plot

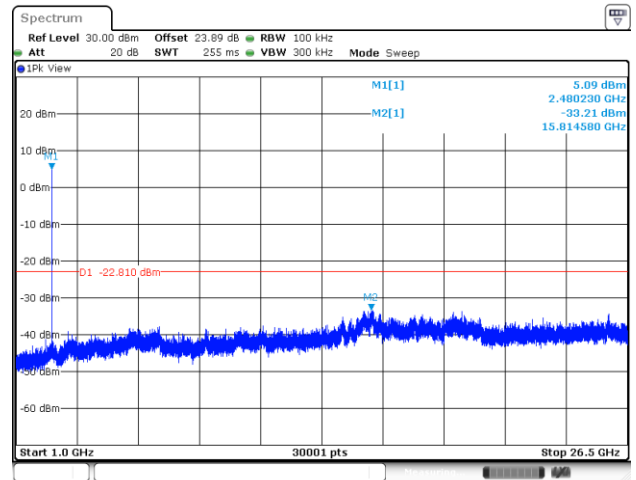





&lt;2Mbps&gt;

## Channel 37


## 100kHz PSD reference Level Plot

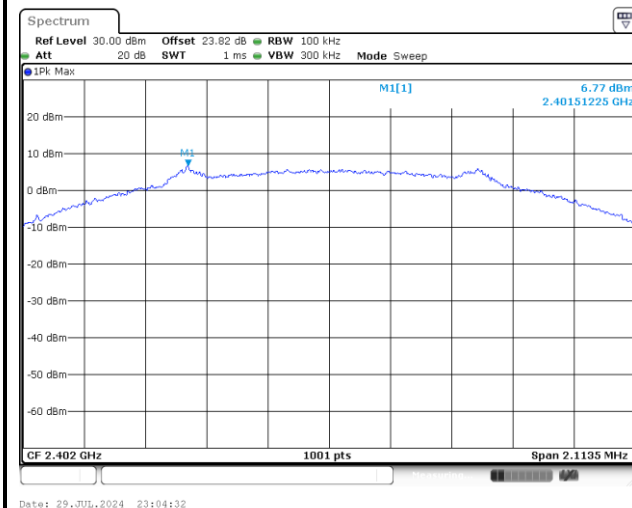


## Low Channel Plot

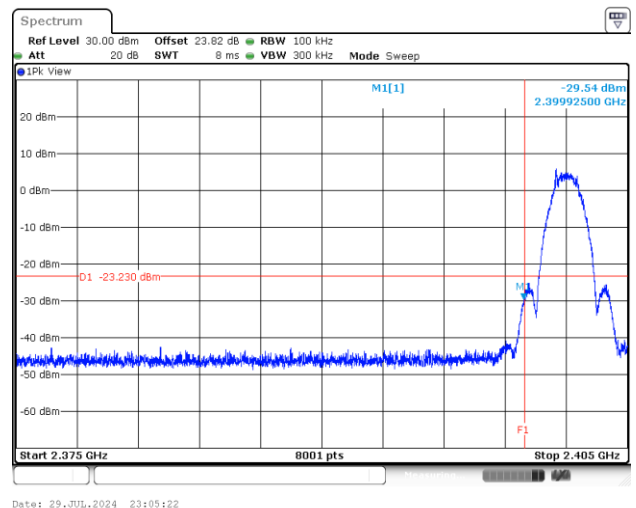

## Spurious Emission 30MHz~1GHz Plot

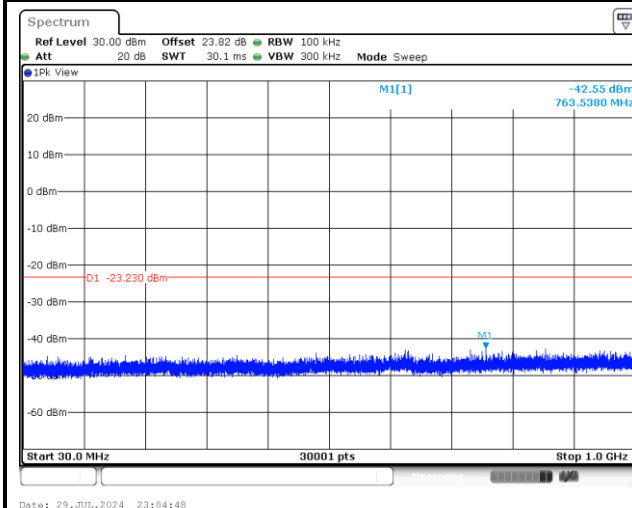


## Spurious Emission 1GHz~26.5GHz Plot

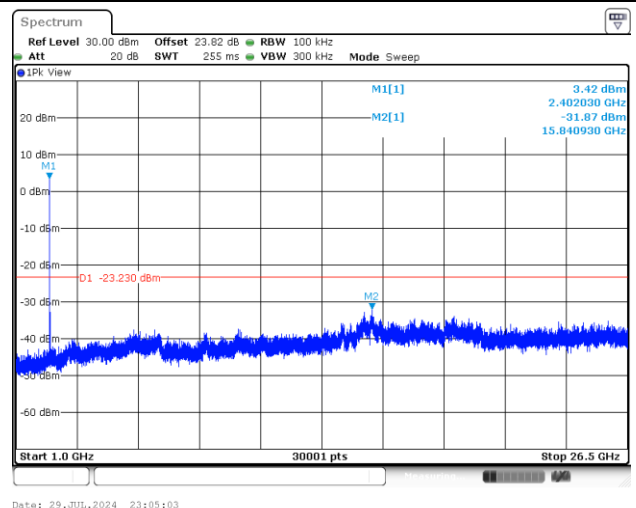




## Channel 17

## 100kHz PSD reference Level Plot

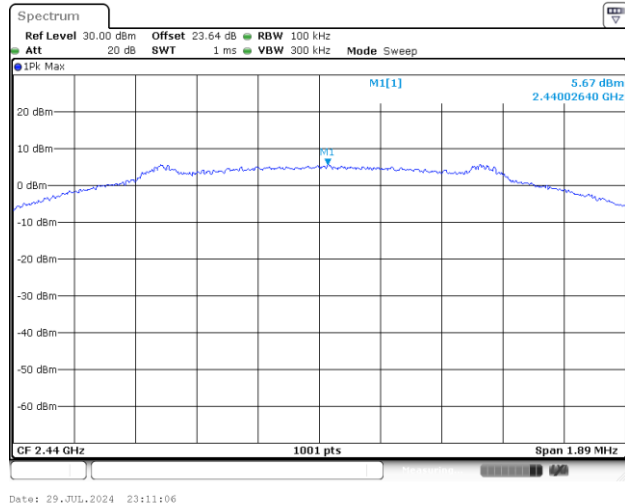


## Mid Channel Plot

## Spurious Emission 30MHz~1GHz Plot

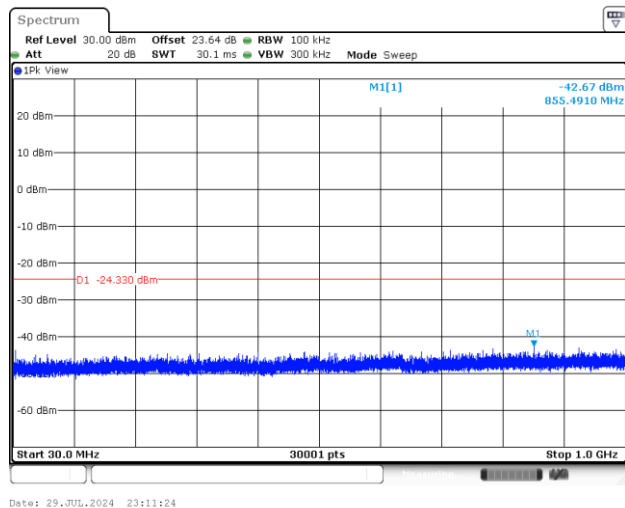


## Spurious Emission 1GHz~26.5GHz Plot

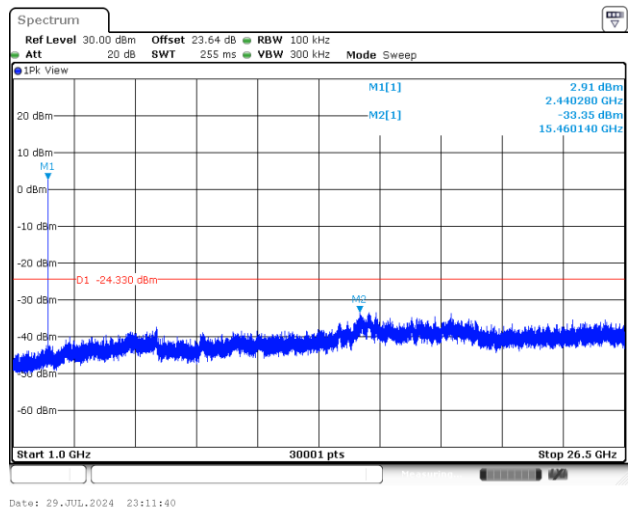




## Channel 39


## 100kHz PSD reference Level Plot

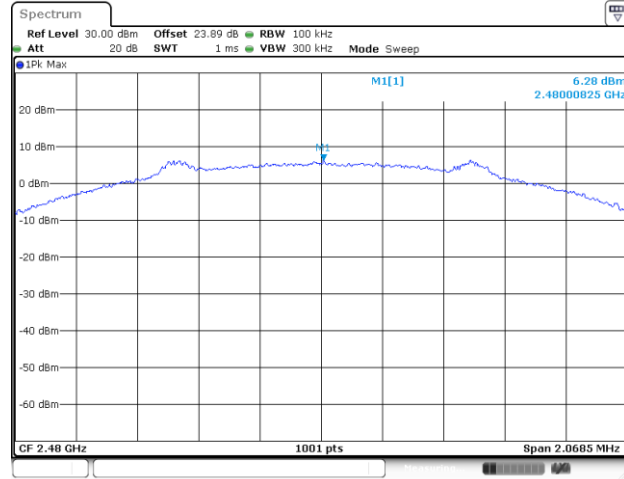


## High Channel Plot

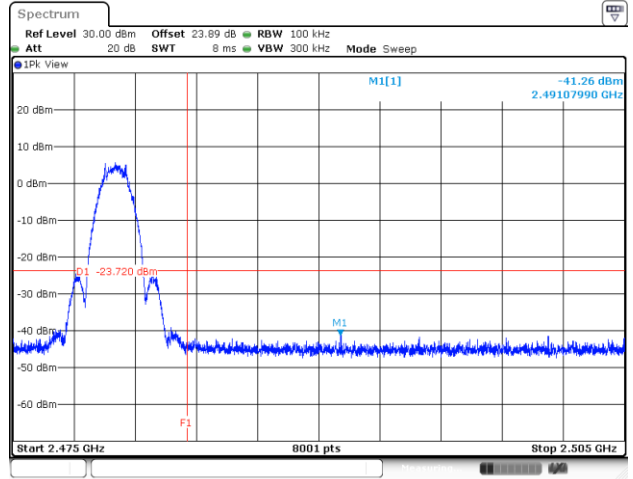

## Spurious Emission 30MHz~1GHz Plot

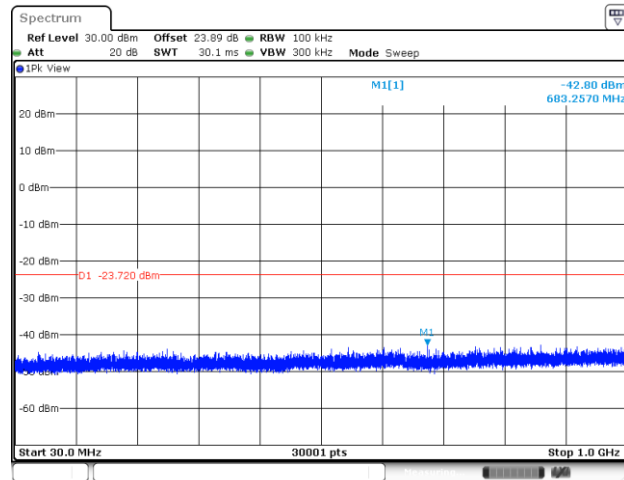

## Spurious Emission 1GHz~26.5GHz Plot

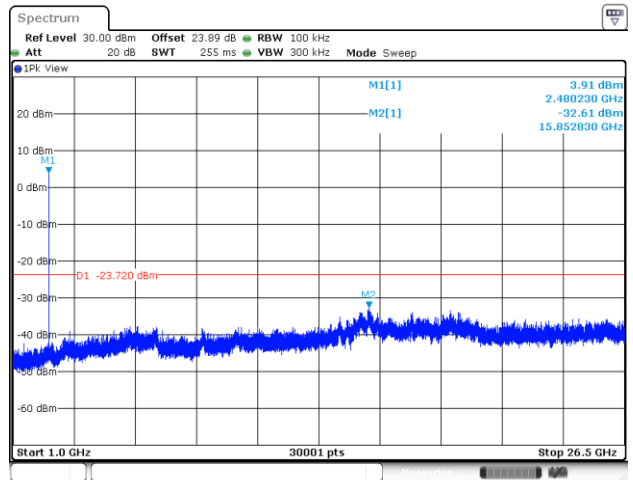




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	22.2~25.6°C
		Relative Humidity :	42.9~53.7%

## EUT Information

Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

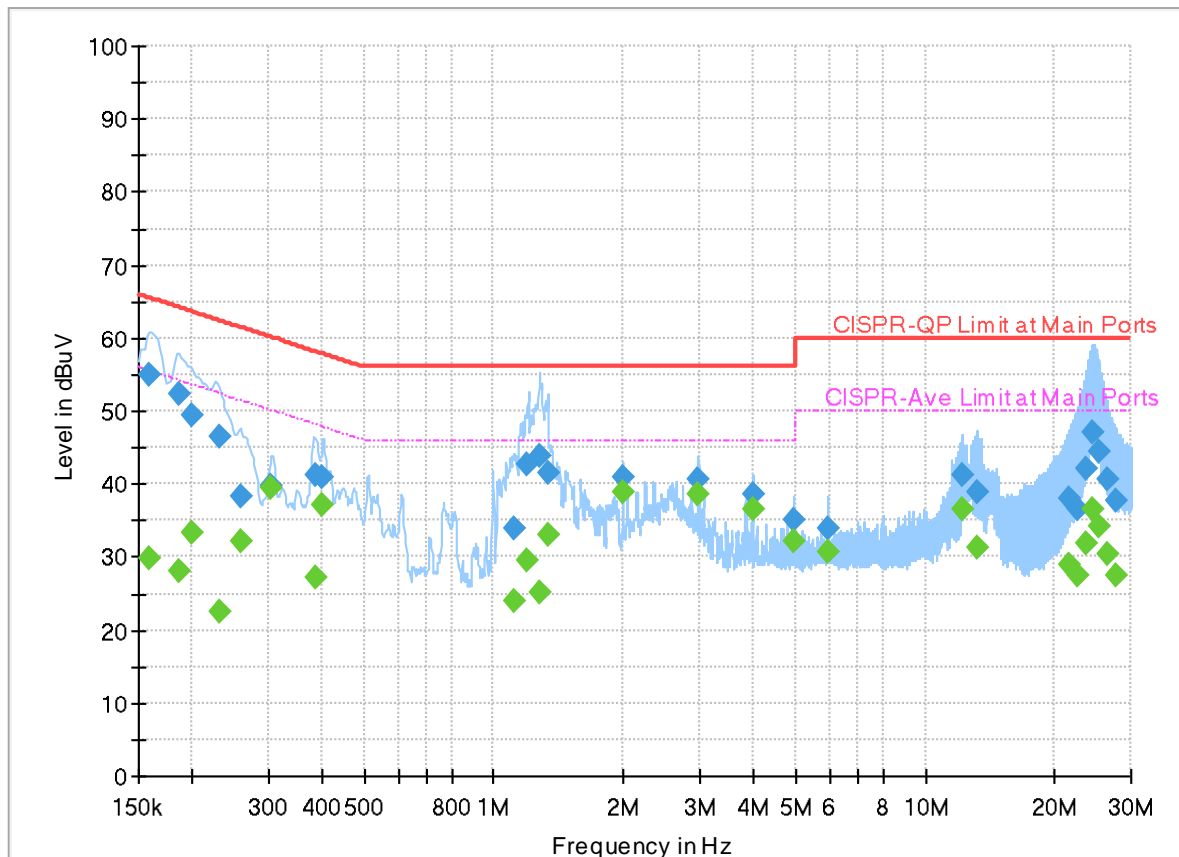

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.158280	---	29.97	55.55	25.58	L1	FLO	19.9
0.158280	54.97	---	65.55	10.58	L1	FLO	19.9
0.186360	---	28.11	54.20	26.09	L1	FLO	19.9
0.186360	52.39	---	64.20	11.81	L1	FLO	19.9
0.199500	---	33.42	53.63	20.21	L1	FLO	19.9
0.199500	49.45	---	63.63	14.18	L1	FLO	19.9
0.231000	---	22.38	52.41	30.03	L1	FLO	19.9
0.231000	46.55	---	62.41	15.86	L1	FLO	19.9
0.260070	---	32.10	51.43	19.33	L1	FLO	19.9
0.260070	38.43	---	61.43	23.00	L1	FLO	19.9
0.304890	---	39.38	50.11	10.73	L1	FLO	19.9
0.304890	39.67	---	60.11	20.44	L1	FLO	19.9
0.386250	---	27.25	48.14	20.89	L1	FLO	19.9
0.386250	41.35	---	58.14	16.79	L1	FLO	19.9
0.397590	---	37.02	47.90	10.88	L1	FLO	19.9
0.397590	40.79	---	57.90	17.11	L1	FLO	19.9
1.117500	---	23.87	46.00	22.13	L1	FLO	19.9
1.117500	33.89	---	56.00	22.11	L1	FLO	19.9
1.198500	---	29.61	46.00	16.39	L1	FLO	19.9

1.198500	42.56	---	56.00	13.44	L1	FLO	19.9
1.274460	---	25.29	46.00	20.71	L1	FLO	19.9
1.274460	43.96	---	56.00	12.04	L1	FLO	19.9
1.331250	---	33.04	46.00	12.96	L1	FLO	20.0
1.331250	41.63	---	56.00	14.37	L1	FLO	20.0
1.989600	---	38.94	46.00	7.06	L1	FLO	20.0
1.989600	41.05	---	56.00	14.95	L1	FLO	20.0
2.984730	---	38.47	46.00	7.53	L1	FLO	20.0
2.984730	40.66	---	56.00	15.34	L1	FLO	20.0
3.979860	---	36.50	46.00	9.50	L1	FLO	20.0
3.979860	38.63	---	56.00	17.37	L1	FLO	20.0
4.975260	---	32.11	46.00	13.89	L1	FLO	20.0
4.975260	35.16	---	56.00	20.84	L1	FLO	20.0
5.970210	---	30.68	50.00	19.32	L1	FLO	20.0
5.970210	33.87	---	60.00	26.13	L1	FLO	20.0
12.227190	---	36.41	50.00	13.59	L1	FLO	20.1
12.227190	41.35	---	60.00	18.65	L1	FLO	20.1
13.139250	---	31.18	50.00	18.82	L1	FLO	20.1
13.139250	38.78	---	60.00	21.22	L1	FLO	20.1
21.579450	---	28.85	50.00	21.15	L1	FLO	20.1
21.579450	38.12	---	60.00	21.88	L1	FLO	20.1
22.686000	---	27.55	50.00	22.45	L1	FLO	20.2
22.686000	36.54	---	60.00	23.46	L1	FLO	20.2
23.662500	---	31.92	50.00	18.08	L1	FLO	20.2
23.662500	42.07	---	60.00	17.93	L1	FLO	20.2
24.571500	---	36.48	50.00	13.52	L1	FLO	20.2
24.571500	47.04	---	60.00	12.96	L1	FLO	20.2
25.415250	---	34.26	50.00	15.74	L1	FLO	20.2
25.415250	44.55	---	60.00	15.45	L1	FLO	20.2
26.324970	---	30.37	50.00	19.63	L1	FLO	20.2
26.324970	40.57	---	60.00	19.43	L1	FLO	20.2
27.627000	---	27.35	50.00	22.65	L1	FLO	20.2
27.627000	37.67	---	60.00	22.33	L1	FLO	20.2

## EUT Information

Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

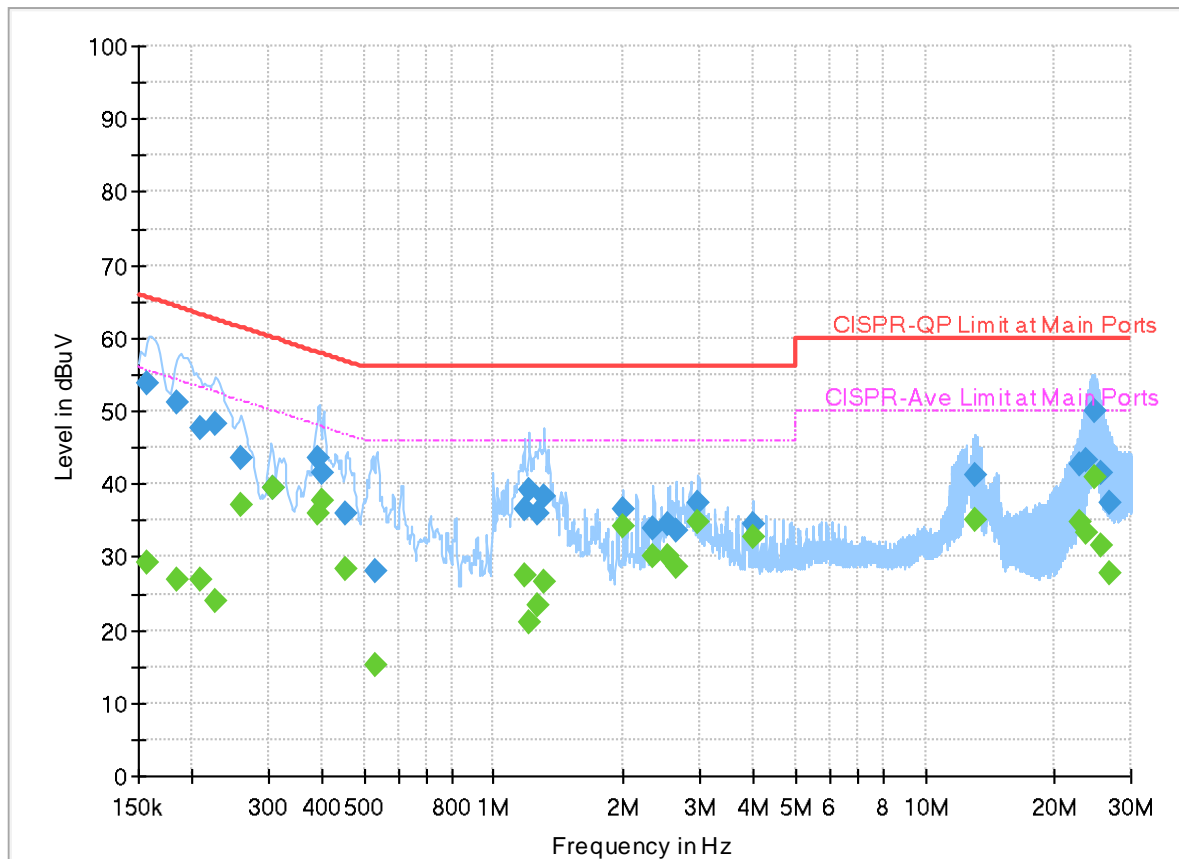

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.156750	---	29.38	55.63	26.25	N	FLO	19.9
0.156750	53.67	---	65.63	11.96	N	FLO	19.9
0.184110	---	26.88	54.30	27.42	N	FLO	19.9
0.184110	51.27	---	64.30	13.03	N	FLO	19.9
0.208500	---	26.95	53.27	26.32	N	FLO	19.9
0.208500	47.57	---	63.27	15.70	N	FLO	19.9
0.224790	---	23.95	52.64	28.69	N	FLO	19.9
0.224790	48.25	---	62.64	14.39	N	FLO	19.9
0.260340	---	37.26	51.42	14.16	N	FLO	19.9
0.260340	43.54	---	61.42	17.88	N	FLO	19.9
0.305970	---	39.37	50.08	10.71	N	FLO	19.9
0.305970	39.58	---	60.08	20.50	N	FLO	19.9
0.389400	---	36.08	48.08	12.00	N	FLO	19.9
0.389400	43.65	---	58.08	14.43	N	FLO	19.9
0.397770	---	37.66	47.90	10.24	N	FLO	19.9
0.397770	41.44	---	57.90	16.46	N	FLO	19.9
0.453300	---	28.49	46.81	18.32	N	FLO	19.9
0.453300	35.89	---	56.81	20.92	N	FLO	19.9
0.530250	---	15.19	46.00	30.81	N	FLO	19.9



0.530250	28.15	---	56.00	27.85	N	FLO	19.9
1.182750	---	27.36	46.00	18.64	N	FLO	20.0
1.182750	36.51	---	56.00	19.49	N	FLO	20.0
1.209750	---	21.16	46.00	24.84	N	FLO	20.0
1.209750	39.24	---	56.00	16.76	N	FLO	20.0
1.256820	---	23.42	46.00	22.58	N	FLO	20.0
1.256820	36.02	---	56.00	19.98	N	FLO	20.0
1.313250	---	26.71	46.00	19.29	N	FLO	20.0
1.313250	38.23	---	56.00	17.77	N	FLO	20.0
1.989870	---	34.19	46.00	11.81	N	FLO	20.0
1.989870	36.42	---	56.00	19.58	N	FLO	20.0
2.343750	---	30.11	46.00	15.89	N	FLO	20.0
2.343750	33.91	---	56.00	22.09	N	FLO	20.0
2.544000	---	30.16	46.00	15.84	N	FLO	20.0
2.544000	34.64	---	56.00	21.36	N	FLO	20.0
2.645250	---	28.63	46.00	17.37	N	FLO	20.0
2.645250	33.57	---	56.00	22.43	N	FLO	20.0
2.985720	---	34.85	46.00	11.15	N	FLO	20.0
2.985720	37.51	---	56.00	18.49	N	FLO	20.0
3.980400	---	32.84	46.00	13.16	N	FLO	20.0
3.980400	34.63	---	56.00	21.37	N	FLO	20.0
13.054110	---	35.23	50.00	14.77	N	FLO	20.1
13.054110	41.15	---	60.00	18.85	N	FLO	20.1
22.794720	---	34.71	50.00	15.29	N	FLO	20.2
22.794720	42.55	---	60.00	17.45	N	FLO	20.2
23.642250	---	33.33	50.00	16.67	N	FLO	20.2
23.642250	43.14	---	60.00	16.86	N	FLO	20.2
24.614070	---	41.07	50.00	8.93	N	FLO	20.2
24.614070	50.01	---	60.00	9.99	N	FLO	20.2
25.460520	---	31.62	50.00	18.38	N	FLO	20.2
25.460520	41.64	---	60.00	18.36	N	FLO	20.2
26.760750	---	27.78	50.00	22.22	N	FLO	20.2
26.760750	37.33	---	60.00	22.67	N	FLO	20.2



## Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Fan, Tim Lee and Wilson Wu	Temperature :	20~25°C
		Relative Humidity :	50~60%

&lt;1Mbps&gt;

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 37 2402MHz		2331.63	55.55	-18.45	74	44.74	27.22	17.21	33.62	291	89	P	H
		2389.59	44.36	-9.64	54	33.27	27.49	17.24	33.64	291	89	A	H
	*	2402	64.07	-	-	52.86	27.6	17.25	33.64	291	89	P	H
	*	2402	62.69	-	-	51.48	27.6	17.25	33.64	291	89	A	H
													H
		2365.02	55.87	-18.13	74	44.88	27.4	17.22	33.63	100	152	P	V
		2389.695	44.35	-9.65	54	33.26	27.49	17.24	33.64	100	152	A	V
	*	2402	67.64	-	-	56.43	27.6	17.25	33.64	100	152	P	V
	*	2402	66.62	-	-	55.41	27.6	17.25	33.64	100	152	A	V
													V
BLE CH 17 2440MHz		2352.3	57.03	-16.97	74	46.11	27.32	17.22	33.62	346	119	P	H
		2353.65	44.78	-9.22	54	33.84	27.34	17.22	33.62	346	119	A	H
	*	2440	65.05	-	-	53.66	27.7	17.35	33.66	346	119	P	H
	*	2440	63.51	-	-	52.12	27.7	17.35	33.66	346	119	A	H
		2498.53	56.92	-17.08	74	44.99	28.09	17.52	33.68	346	119	P	H
		2498.04	45.24	-8.76	54	33.33	28.08	17.51	33.68	346	119	A	H
		2383.2	54.77	-19.23	74	43.82	27.36	17.23	33.64	135	157	P	V
		2389.8	44.32	-9.68	54	33.22	27.5	17.24	33.64	135	157	A	V
	*	2440	66.74	-	-	55.35	27.7	17.35	33.66	135	157	P	V
	*	2440	65.68	-	-	54.29	27.7	17.35	33.66	135	157	A	V
		2489.78	55.88	-18.12	74	44.07	28	17.49	33.68	135	157	P	V
		2495.52	45.23	-8.77	54	33.34	28.06	17.51	33.68	135	157	A	V



BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 39 2480MHz	*	2480	66.43	-	-	54.74	27.9	17.46	33.67	332	86	P	H
	*	2480	64.9	-	-	53.21	27.9	17.46	33.67	332	86	A	H
		2498.12	56.84	-17.16	74	44.93	28.08	17.51	33.68	332	86	P	H
		2498.36	45.17	-8.83	54	33.25	28.08	17.52	33.68	332	86	A	H
													H
													H
	*	2480	68.62	-	-	56.93	27.9	17.46	33.67	123	192	P	V
	*	2480	67.53	-	-	55.84	27.9	17.46	33.67	123	192	A	V
		2498.04	56.23	-17.77	74	44.32	28.08	17.51	33.68	123	192	P	V
		2496.76	45.17	-8.83	54	33.27	28.07	17.51	33.68	123	192	A	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****BLE (Harmonic @ 3m)**

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 37 2402MHz		4804	43.56	-30.44	74	65.55	32.52	12.57	67.08	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	44.76	-29.24	74	66.75	32.52	12.57	67.08	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 17 2440MHz		4880	42.11	-31.89	74	64.03	32.86	12.21	66.99	-	-	P	H
		7320	47.66	-26.34	74	61.99	37.08	14.63	66.04	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4880	43.76	-30.24	74	65.68	32.86	12.21	66.99	-	-	P	V
		7320	46.77	-27.23	74	61.1	37.08	14.63	66.04	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

BLE	Note	Frequency  ( MHz )	Level  ( dBμV/m )	Margin  ( dB )	Limit Line  ( dBμV/m )	Read Level  ( dBμV )	Antenna Factor  ( dB/m )	Path Loss  ( dB )	Preamp Factor  ( dB )	Ant Pos  ( cm )	Table Pos  ( deg )	Peak Avg.  (P/A)	Pol.  (H/V)
BLE CH 39 2480MHz		4960	43.07	-30.93	74	64.82	33.32	11.83	66.9	-	-	P	H
		7440	47.56	-26.44	74	62.19	36.68	14.83	66.14	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4960	42.11	-31.89	74	63.86	33.32	11.83	66.9	-	-	P	V
		7440	47.55	-26.45	74	62.18	36.68	14.83	66.14	-	-	P	V
													V
													V
													V
													V
													V
													V
												V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



&lt;2Mbps&gt;

## 2.4GHz 2400~2483.5MHz

## BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 37 2402MHz		2353.995	57.39	-16.61	74	46.45	27.34	17.22	33.62	249	120	P	H
		2353.26	44.59	-9.41	54	33.66	27.33	17.22	33.62	249	120	A	H
	*	2402	64	-	-	52.79	27.6	17.25	33.64	249	120	P	H
	*	2402	62.73	-	-	51.52	27.6	17.25	33.64	249	120	A	H
													H
													H
		2349.06	55.51	-18.49	74	44.61	27.3	17.22	33.62	131	153	P	V
		2390	44.52	-9.48	54	33.42	27.5	17.24	33.64	131	153	A	V
	*	2402	67.76	-	-	56.55	27.6	17.25	33.64	131	153	P	V
	*	2402	66.7	-	-	55.49	27.6	17.25	33.64	131	153	A	V
													V
													V
BLE CH 17 2440MHz		2363.55	55.11	-18.89	74	44.12	27.4	17.22	33.63	282	87	P	H
		2389.65	44.31	-9.69	54	33.22	27.49	17.24	33.64	282	87	A	H
	*	2440	65.44	-	-	54.05	27.7	17.35	33.66	282	87	P	H
	*	2440	64.24	-	-	52.85	27.7	17.35	33.66	282	87	A	H
		2485.72	56.32	-17.68	74	44.55	27.96	17.48	33.67	282	87	P	H
		2497.34	45.21	-8.79	54	33.31	28.07	17.51	33.68	282	87	A	H
		2323.65	54.79	-19.21	74	43.93	27.26	17.21	33.61	100	189	P	V
		2389.95	44.33	-9.67	54	33.23	27.5	17.24	33.64	100	189	A	V
	*	2440	66.35	-	-	54.96	27.7	17.35	33.66	100	189	P	V
	*	2440	65.2	-	-	53.81	27.7	17.35	33.66	100	189	A	V
		2499.79	56.18	-17.82	74	44.24	28.1	17.52	33.68	100	189	P	V
		2499.86	45.23	-8.77	54	33.29	28.1	17.52	33.68	100	189	A	V



BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 39 2480MHz	*	2480	65.99	-	-	54.3	27.9	17.46	33.67	335	117	P	H
	*	2480	64.39	-	-	52.7	27.9	17.46	33.67	335	117	A	H
		2496.36	56.14	-17.86	74	44.25	28.06	17.51	33.68	335	117	P	H
		2494.44	45.2	-8.8	54	33.34	28.04	17.5	33.68	335	117	A	H
													H
													H
	*	2480	68.91	-	-	57.22	27.9	17.46	33.67	163	189	P	V
	*	2480	68.08	-	-	56.39	27.9	17.46	33.67	163	189	A	V
		2491.24	55.86	-18.14	74	44.03	28.01	17.5	33.68	163	189	P	V
		2493.56	45.23	-8.77	54	33.37	28.04	17.5	33.68	163	189	A	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz****BLE (Harmonic @ 3m)**

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 37 2402MHz		4804	42.87	-31.13	74	64.86	32.52	12.57	67.08	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	43.47	-30.53	74	65.46	32.52	12.57	67.08	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 17 2440MHz		4880	43.9	-30.1	74	65.82	32.86	12.21	66.99	-	-	P	H
		7320	47.67	-26.33	74	62	37.08	14.63	66.04	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4880	42.75	-31.25	74	64.67	32.86	12.21	66.99	-	-	P	V
		7320	47.84	-26.16	74	62.17	37.08	14.63	66.04	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

[illegible]

## Emission above 18GHz

## 2.4GHz BLE (SHF)

[illegible]

## Emission below 1GHz

## 2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)	
2.4GHz  BLE  LF		74.55	27.98	-12.02	40	42.83	13.43	1.62	29.9	-	-	P	H	
		137.73	23.05	-20.45	43.5	32.88	17.74	2.29	29.86	-	-	P	H	
		151.5	28.74	-14.76	43.5	39.06	17.18	2.34	29.84	-	-	P	H	
		279.75	26.58	-19.42	46	34.39	18.83	2.96	29.6	-	-	P	H	
		561.8	30.19	-15.81	46	28.87	26.45	4.02	29.15	-	-	P	H	
		783.7	36.72	-9.28	46	32.32	28.22	5.03	28.85	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
		41.34	33.81	-6.19	40	43.12	19.2	1.15	29.66	-	-	P	V	
		92.1	28.26	-15.24	43.5	41.13	15.3	1.74	29.91	-	-	P	V	
		188.22	26.69	-16.81	43.5	39.05	15.01	2.42	29.79	-	-	P	V	
		271.65	24.4	-21.6	46	32.24	18.89	2.89	29.62	-	-	P	V	
		624.8	30.47	-15.53	46	28.77	26.48	4.32	29.1	-	-	P	V	
		949.6	37.08	-8.92	46	28.96	31.01	5.41	28.3	-	-	P	V	
														V
														V
														V
														V
													V	
													V	
Remark	1. No other spurious found.													
	2. All results are PASS against limit line.													
	3. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>Margin</b> line.
P/A	<b>P</b> eak or <b>A</b> verage
H/V	<b>H</b> orizontal or <b>V</b> ertical



**A calculation example for radiated spurious emission is shown as below:**

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 37 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Margin (dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Margin (dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jesse Fan, Tim Lee and Wilson Wu	Temperature :	20~25°C
		Relative Humidity :	50~60%

### Note symbol

-L	Low channel location
-R	High channel location





&lt;1Mbps&gt;

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH37 2402MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	<p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH37 2402MHz	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>
Avg	<div><p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>

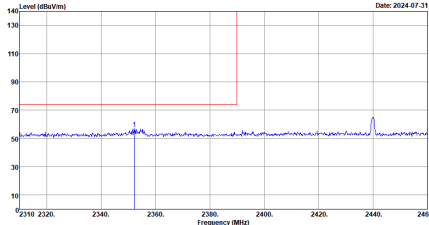
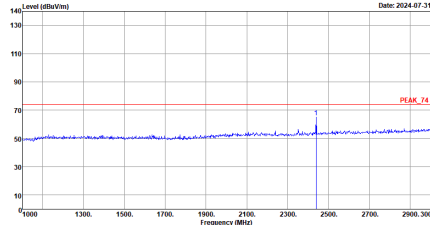
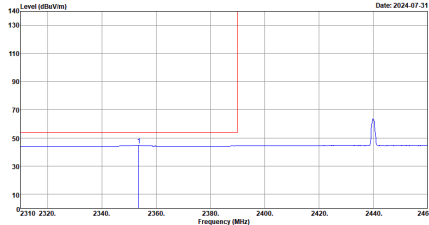
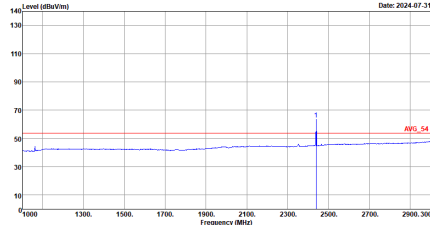


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH17 2440MHz - L	
	Horizontal	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>
Avg.	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:01010KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:01010KHz SWT:Auto</p></div>

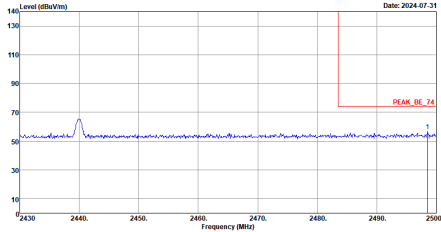
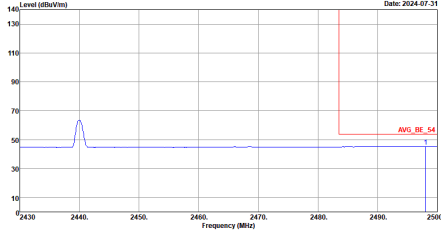


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH17 2440MHz - R	
	Horizontal	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 HORIZONTAL RBW:1000.000KHz VSW:3000.000KHz SWT:Auto</p></div>	Left blank
Avg.	<div><p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 HORIZONTAL RBW:1000.000KHz VSW:0.010KHz SWT:Auto</p></div>	Left blank

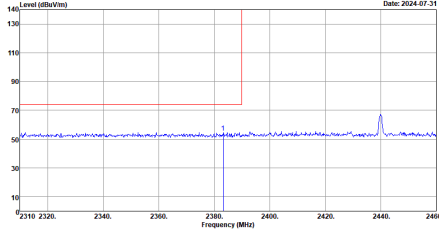
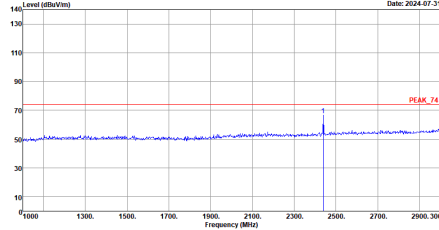
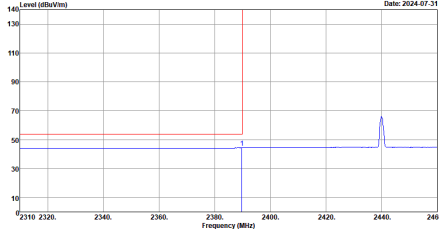
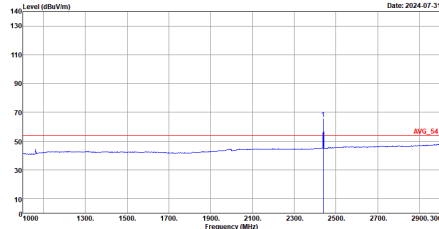


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH17 2440MHz - L	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>
Avg.	<div><p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>



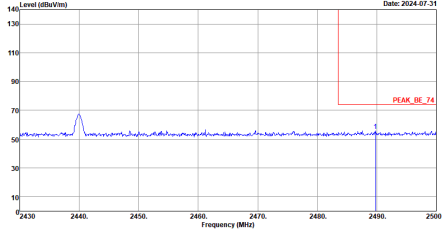
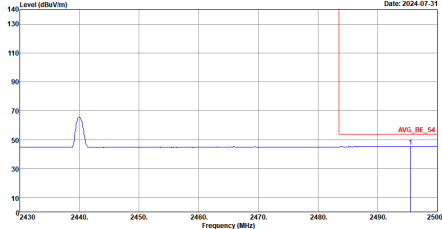


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH17 2440MHz - R	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VSW:3000.000KHz SWT:Auto</p></div>	Left blank
Avg.	<div><p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VSW:0.010KHz SWT:Auto</p></div>	Left blank

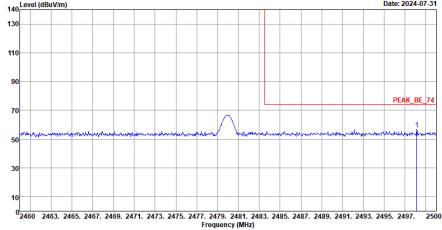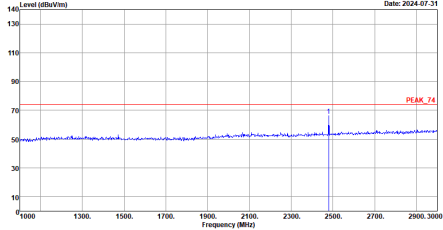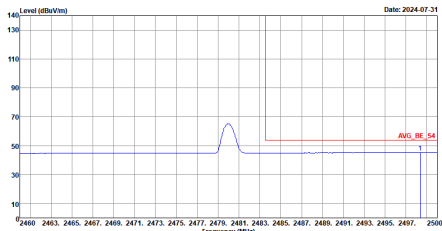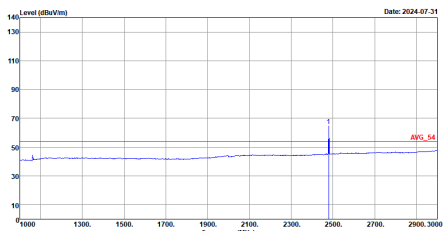

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>
Avg.	<div><p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>

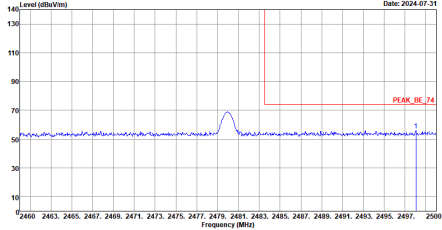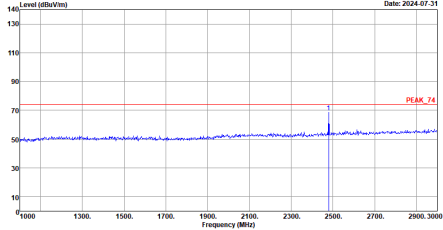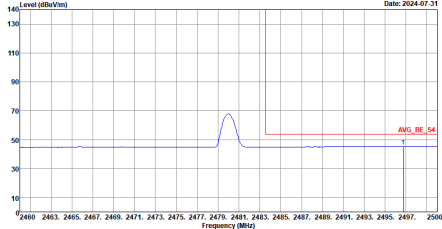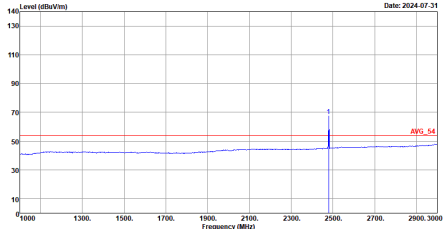

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>
Avg.	<div><p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>









2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH37 2402MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 HORIZONTAL :</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 VERTICAL :</p></div>

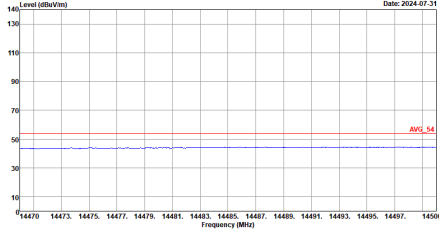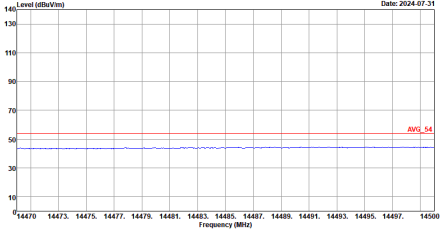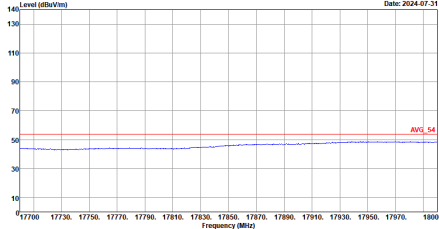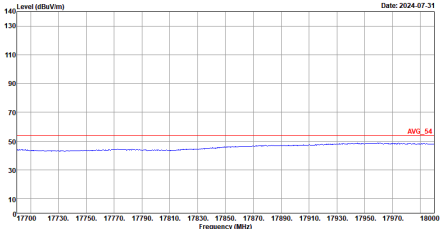

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH37 2402MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 HORIZONTAL :</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 VERTICAL :</p></div>
17.7G ~18G Avg	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 HORIZONTAL :</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 VERTICAL :</p></div>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH17 2440MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 HORIZONTAL :</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 VERTICAL :</p></div>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH17 2440MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	<div><p>Horizontal spectrum plot for 14.47G. The y-axis is Level (dBuV/m) from 10 to 140. The x-axis is Frequency (MHz) from 14470 to 14500. A red line labeled 'AVG_54' is at approximately 55 dBuV/m. A blue line is at approximately 45 dBuV/m. The plot shows a flat spectrum with minor noise. Date: 2024-07-31</p><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 HORIZONTAL :</p></div>	<div><p>Vertical spectrum plot for 14.47G. The y-axis is Level (dBuV/m) from 10 to 140. The x-axis is Frequency (MHz) from 14470 to 14500. A red line labeled 'AVG_54' is at approximately 55 dBuV/m. A blue line is at approximately 45 dBuV/m. The plot shows a flat spectrum with minor noise. Date: 2024-07-31</p><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 VERTICAL :</p></div>
17.7G ~18G Avg	<div><p>Horizontal spectrum plot for 17.7G. The y-axis is Level (dBuV/m) from 10 to 140. The x-axis is Frequency (MHz) from 17700 to 18000. A red line labeled 'AVG_54' is at approximately 55 dBuV/m. A blue line is at approximately 45 dBuV/m. The plot shows a flat spectrum with minor noise. Date: 2024-07-31</p><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 HORIZONTAL :</p></div>	<div><p>Vertical spectrum plot for 17.7G. The y-axis is Level (dBuV/m) from 10 to 140. The x-axis is Frequency (MHz) from 17700 to 18000. A red line labeled 'AVG_54' is at approximately 55 dBuV/m. A blue line is at approximately 45 dBuV/m. The plot shows a flat spectrum with minor noise. Date: 2024-07-31</p><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 VERTICAL :</p></div>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>PEAK_74</p><p>Avg_54</p><p>Site : 03CH12-HY</p><p>Condition : PEAK_74 3m 91200-02114-250710 HORIZONTAL</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>PEAK_74</p><p>Avg_54</p><p>Site : 03CH12-HY</p><p>Condition : PEAK_74 3m 91200-02114-250710 VERTICAL</p></div>







BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Frequency (MHz)</p><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 HORIZONTAL :</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Frequency (MHz)</p><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 VERTICAL :</p></div>
17.7G ~18G Avg	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Frequency (MHz)</p><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 HORIZONTAL :</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Frequency (MHz)</p><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 VERTICAL :</p></div>



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

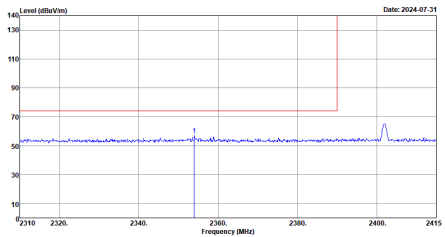
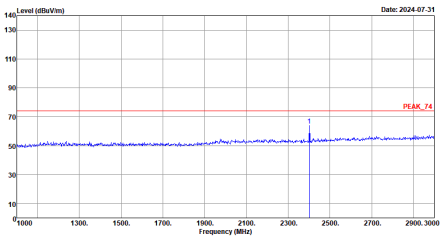
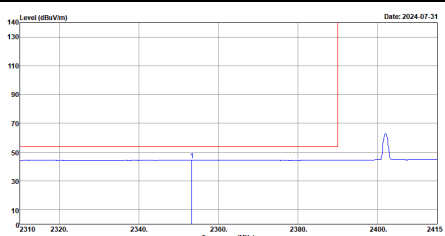
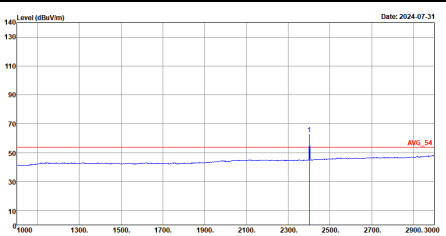
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH37 2402MHz	
	Horizontal	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>
Avg.	<div><p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH37 2402MHz	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>
Avg	<div><p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>



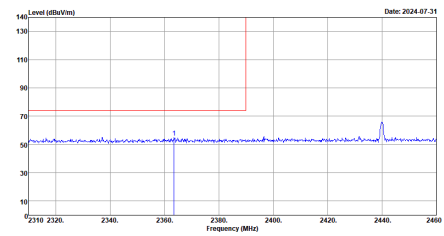
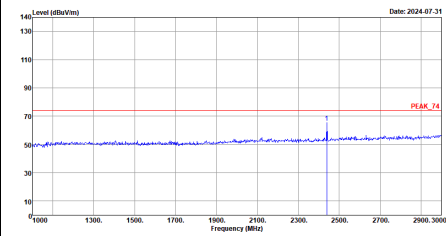
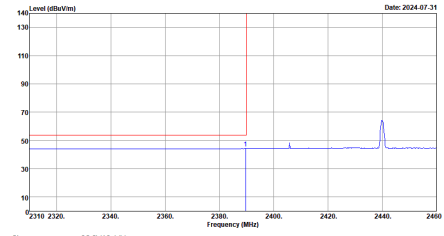
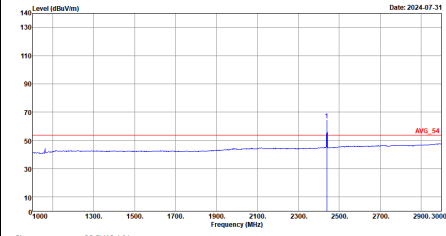


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH17 2440MHz - L	
	Horizontal	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_9C_74 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>
Avg.	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>

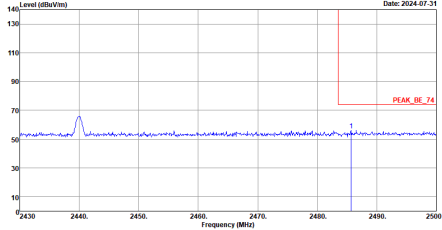
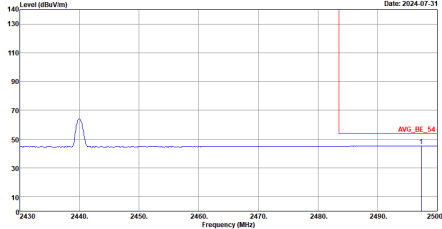


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH17 2440MHz - R	
	Horizontal	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	Left blank
Avg.	<div><p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>	Left blank

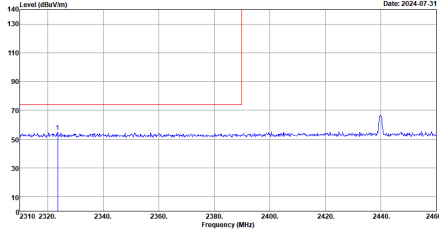
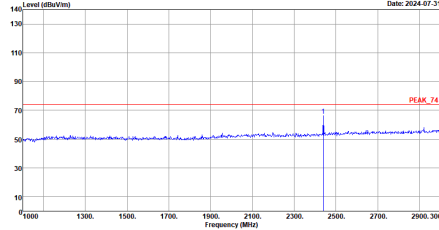
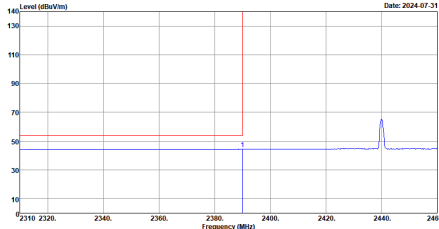
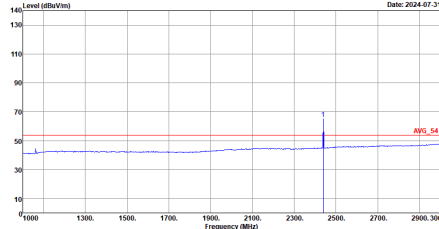


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH17 2440MHz - L	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>
Avg.	<div><p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>



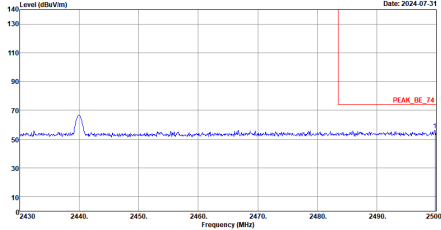
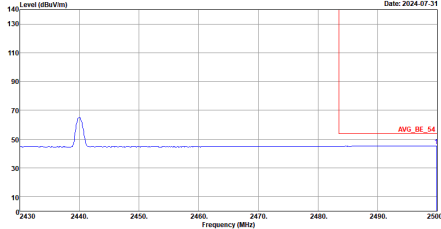


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH17 2440MHz - R	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	Left blank
Avg.	<div><p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>	Left blank

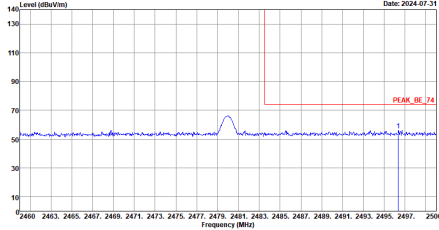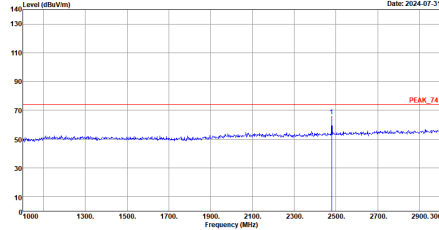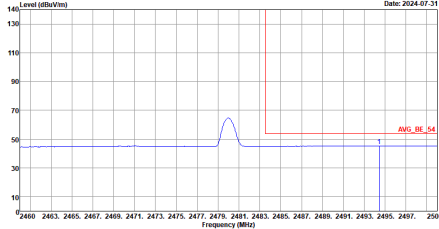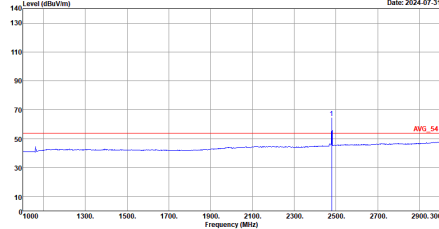

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>
Avg.	<div><p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>

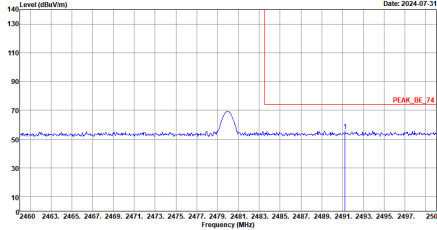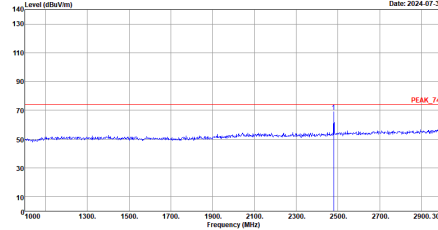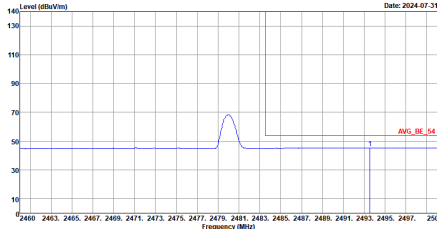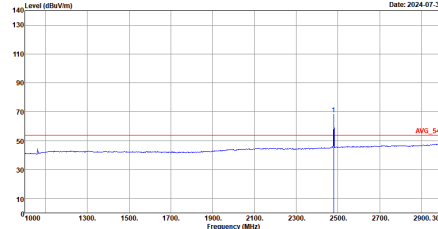

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p></div>
Avg.	<div><p>Site : 03CH12-HY Condition : AVG_BE_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 91200-02114-250710 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p></div>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH37 2402MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 HORIZONTAL :</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 VERTICAL :</p></div>







BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH37 2402MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Frequency (MHz)</p><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 HORIZONTAL :</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Frequency (MHz)</p><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 VERTICAL :</p></div>
17.7G ~18G Avg	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Frequency (MHz)</p><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 HORIZONTAL :</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Frequency (MHz)</p><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 VERTICAL :</p></div>





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH17 2440MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Level (dBuV/m)</p><p>Date: 2024-09-02</p><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 HORIZONTAL :</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2024-09-02</p><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 VERTICAL :</p></div>

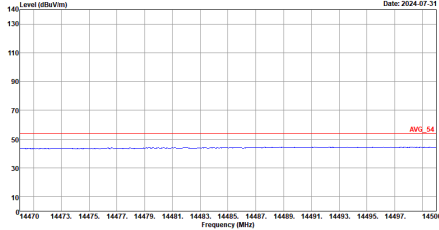
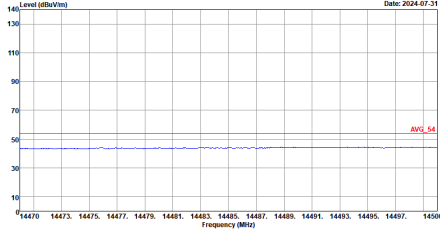
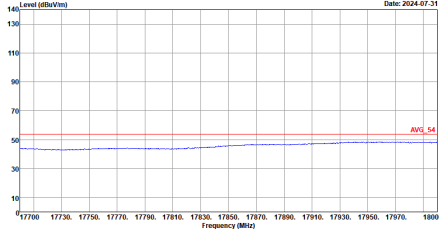
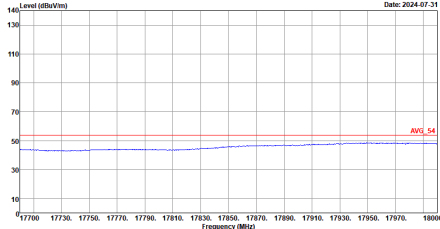


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH17 2440MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 HORIZONTAL :</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 VERTICAL :</p></div>
17.7G ~18G Avg	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 HORIZONTAL :</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 VERTICAL :</p></div>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Frequency (MHz)</p><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 HORIZONTAL :</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2024-07-31</p><p>Frequency (MHz)</p><p>Site : 03CH12-HY Condition : PEAK_74 3m 91200-02114-250710 VERTICAL :</p></div>

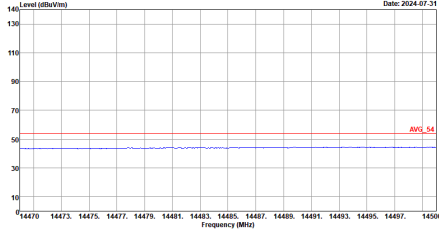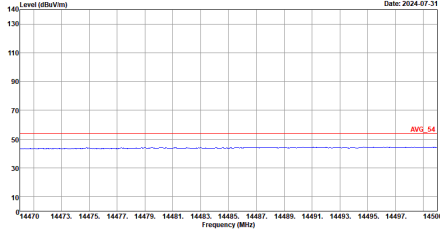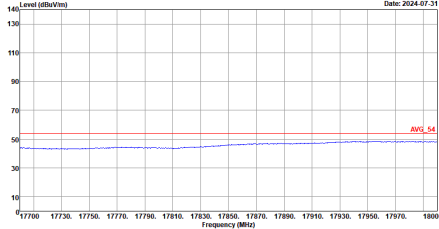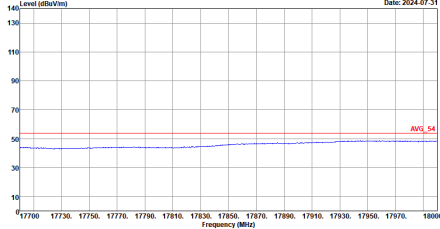

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 HORIZONTAL :</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 VERTICAL :</p></div>
17.7G ~18G Avg	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 HORIZONTAL :</p></div>	<div><p>Site : 03CH12-HY Condition : AVG_54 3m 9120D-02114-250710 VERTICAL :</p></div>



Emission above 18GHz  
2.4GHz BLE (SHF @ 1m)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
Peak Avg.	<div><p>Level (dBuV/m)</p><p>Date: 2024-08-29</p><p>PEAK_74</p><p>AVG_54</p><p>Site : 03CH12-HY Condition : PEAK_74 1m SHF HORN 88HA9170993 HORIZONTAL :</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2024-08-29</p><p>PEAK_74</p><p>AVG_54</p><p>Site : 03CH12-HY Condition : PEAK_74 1m SHF HORN 88HA9170993 VERTICAL :</p></div>



Emission below 1GHz


2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	<div><p>Level (dBuV/m)</p><p>Date: 2024-08-29</p><p>Frequency (MHz)</p><p>Site : 03CH12-HY Condition : QP 3m 81LO6_37059_231103_H HORIZONTAL :</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2024-08-29</p><p>Frequency (MHz)</p><p>Site : 03CH12-HY Condition : QP 3m 81LO6_37059_231103_H VERTICAL :</p></div>



## Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	100.00	-	-	10Hz
Bluetooth - LE for 2Mbps	100.00	-	-	10Hz

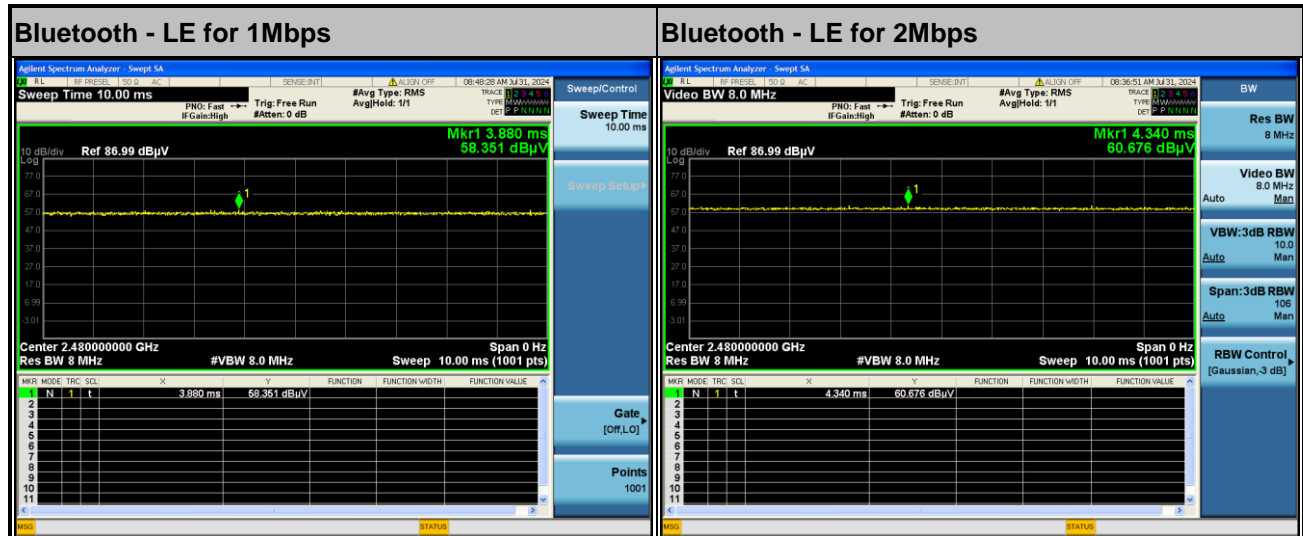

## Appendix F. Setup Photographs

### <Conducted Emission>


Remote View







Rear View

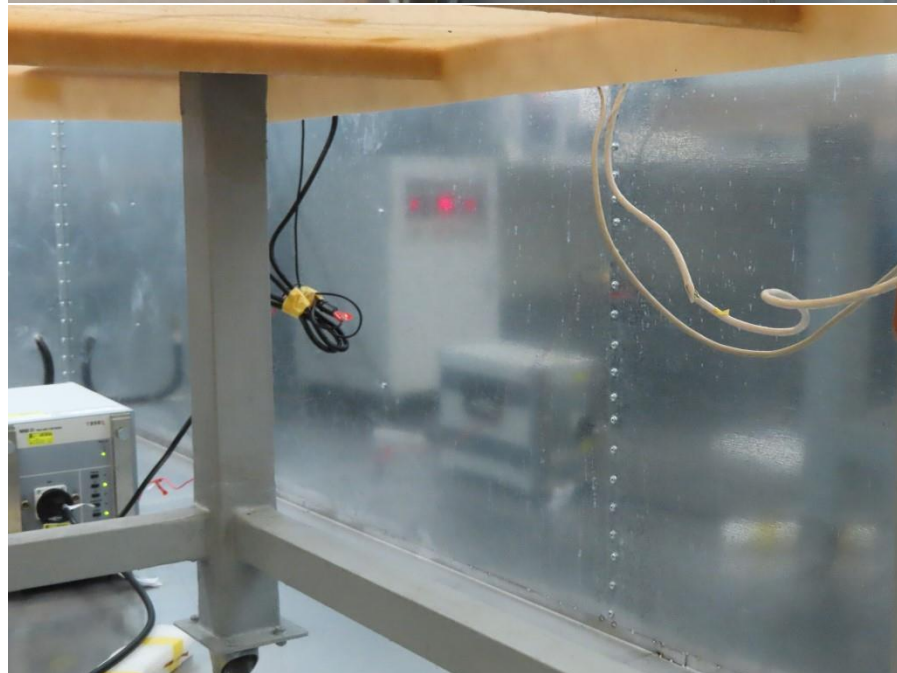


## <Radiated Emission>

**LF**



**HF**

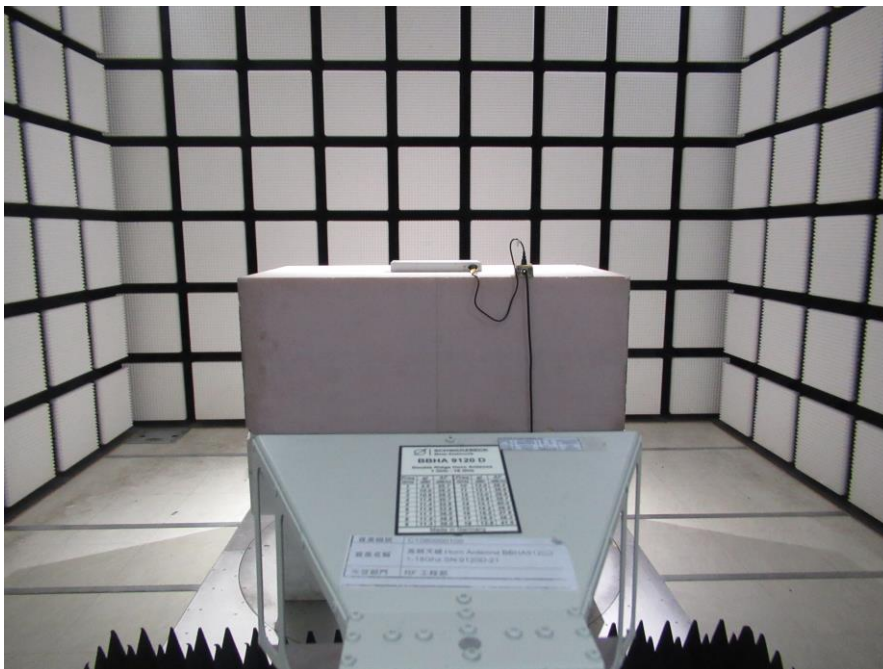

SHF



————THE END————