



# FCC TEST REPORT (15.407)

**REPORT NO.:** RF141024C24-1

**MODEL NO.:** FORTIAP-224Dxxxxxx, FortiAP-224Dxxxxxx,  
FAP-224Dxxxxxx (Refer to 3.1 for more details)

**FCC ID:** TVE-24122013

**RECEIVED:** Oct. 24, 2014

**TESTED:** Nov. 07 to 25, 2014

**ISSUED:** Dec. 15, 2014

**APPLICANT:** Fortinet Inc.

**ADDRESS:** 899 Kifer Road Sunnyvale, CA 94086, USA

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

**LAB ADDRESS :** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (1):** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

## Table of Contents

RELEASE CONTROL RECORD .....	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS .....	6
2.1 MEASUREMENT UNCERTAINTY.....	7
3. GENERAL INFORMATION .....	8
3.1 GENERAL DESCRIPTION OF EUT .....	8
3.2 DESCRIPTION OF TEST MODES .....	11
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	12
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	14
3.4 DUTY CYCLE OF TEST SIGNAL .....	15
3.5 DESCRIPTION OF SUPPORT UNITS .....	16
3.6 CONFIGURATION OF SYSTEM UNDER TEST.....	17
4. TEST TYPES AND RESULTS .....	19
4.1 CONDUCTED EMISSION MEASUREMENT.....	19
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	19
4.1.2 TEST INSTRUMENTS.....	19
4.1.3 TEST PROCEDURES .....	20
4.1.4 DEVIATION FROM TEST STANDARD.....	20
4.1.5 TEST SETUP.....	20
4.1.6 EUT OPERATING CONDITIONS .....	21
4.1.7 TEST RESULTS (MODE 1) .....	22
4.1.8 TEST RESULTS (MODE 2) .....	24
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	26
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT ...	26
4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	27
4.2.3 TEST INSTRUMENTS.....	28
4.2.4 TEST PROCEDURES .....	30
4.2.5 DEVIATION FROM TEST STANDARD.....	30
4.2.6 TEST SETUP.....	31
4.2.7 EUT OPERATING CONDITION.....	31
4.2.8 TEST RESULTS .....	32
4.3 TRANSMIT POWER MEASUREMENT .....	41
4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT .....	41
4.3.2 TEST INSTRUMENTS.....	42
4.3.3 TEST PROCEDURE.....	42
4.3.4 DEVIATION FROM TEST STANDARD.....	43
4.3.5 TEST SETUP.....	43
4.3.6 EUT OPERATING CONDITIONS .....	43
4.3.7 TEST RESULTS .....	44
4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	45
4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	45
4.4.2 TEST INSTRUMENTS.....	45
4.4.3 TEST PROCEDURES .....	46



A D T

4.4.4	DEVIATION FROM TEST STANDARD .....	46
4.4.5	TEST SETUP .....	47
4.4.6	EUT OPERATING CONDITIONS .....	47
4.4.7	TEST RESULTS .....	48
4.5	FREQUENCY STABILITY .....	50
4.5.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	50
4.5.2	TEST INSTRUMENTS .....	50
4.5.3	TEST PROCEDURE .....	50
4.5.4	DEVIATION FROM TEST STANDARD .....	51
4.5.5	TEST SETUP .....	51
4.5.6	EUT OPERATING CONDITION .....	51
4.5.7	TEST RESULTS .....	52
4.6	6DB BANDWIDTH MEASUREMENT .....	53
4.6.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT .....	53
4.6.2	TEST INSTRUMENTS .....	53
4.6.3	TEST PROCEDURE .....	53
4.6.4	DEVIATION FROM TEST STANDARD .....	53
4.6.5	TEST SETUP .....	54
4.6.6	EUT OPERATING CONDITIONS .....	54
4.6.7	TEST RESULTS .....	55
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	57
6.	INFORMATION ON THE TESTING LABORATORIES .....	58
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	59



## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF141024C24-1	Original release	Dec. 15, 2014



A D T

## 1. CERTIFICATION

**PRODUCT:** Secured Wireless Access Point

**BRAND NAME:** Fortinet

**MODEL NO.:** FORTIAP-224Dxxxxxx, FortiAP-224Dxxxxxx,  
FAP-224Dxxxxxx (Refer to 3.1 for more details)

**TEST SAMPLE:** ENGINEERING SAMPLE


**APPLICANT:** Fortinet Inc.

**TESTED:** Nov. 07 to 25, 2014

**STANDARDS:** **FCC Part 15, Subpart E (Section 15.407)**  
ANSI C63.10-2009

The above equipment (Model: FAP-224D) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Dec. 15, 2014  
( Lori Chung, Specialist )

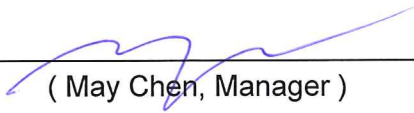**Approved by :**  , **Date:** Dec. 15, 2014  
( May Chen, Manager )

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.76dB at 0.55572MHz
15.407 (b)(1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.9dB at 5860.00MHz.
15.407(a/1/2/3)	Transmit Power	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6dB bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is R-SMA not a standard connector.

**NOTE: 1.** The EUT was operating in 2.400 ~ 2.4835GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.725~5.850GHz. For the 2.400 ~ 2.4835GHz RF parameters was recorded in another test report.

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Conducted emissions	2.86 dB
Radiated emissions (30MHz-1GHz)	5.37 dB
Radiated emissions (1GHz -6GHz)	3.65 dB
Radiated emissions (6GHz -18GHz)	3.88 dB
Radiated emissions (18GHz -40GHz)	4.11 dB



A D T

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Secured Wireless Access Point
<b>MODEL NO.</b>	FORTIAP-224Dxxxxxx, FortiAP-224Dxxxxxx, FAP-224Dxxxxxx (Refer to Note for more details)
<b>POWER SUPPLY</b>	DC 12V from power adapter or DC 48V from POE
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS,OFDM
<b>TRANSFER RATE</b>	802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 300Mbps
<b>OPERATING FREQUENCY</b>	<b>For 15.407</b> 5.745 ~ 5.825GHz
	<b>For 15.247</b> 2.412 ~ 2.462GHz
<b>NUMBER OF CHANNEL</b>	<b>For 15.407</b> 5 for 802.11a, 802.11n (HT20) 2 for 802.11n (HT40)
	<b>For 15.247</b> 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
<b>MAXIMUM OUTPUT POWER</b>	<b>For 15.407</b> 802.11a: 103.561mW 802.11n (HT20): 112.877mW 802.11n (HT40): 76.775mW
	<b>For 15.247</b> 802.11b: 59.78mW 802.11g: 589.39mW 802.11n (HT20): 651.287mW 802.11n (HT40): 366.933mW
<b>ANTENNA TYPE</b>	Please see Note
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	Refer to user's manual
<b>ASSOCIATED DEVICES</b>	POE x 1





**Note:**

- The EUT has below model names, which are identical to each other in all aspects except for the following information:

Brand Name	Model Name	Description
Fortinet	FORTIAP-224Dxxxxxx	where “x” can be used as “A-Z” , or “0-9” , or “- “ , or blank for software changes or marketing purposes only
	FortiAP-224Dxxxxxx	
	FAP-224Dxxxxxx	

From the above models, model: **FAP-224D** was selected as the representative model for the test and its data is recorded in this report.

- The EUT must be supplied with a power adapter or an POE as below table:

Adapter 1 (test only, not for sale)		
Brand	Model No.	Spec.
Powertron Electronics Corp.	PA1015-2I PA1015-2I120125	Input: 100-240V, 0.4A, 50-60Hz Output: 12V, 1.25A, 15W Max DC output cable(unshielded,1.5m)
Adapter 2 (test only, not for sale)		
Brand	Model No.	Spec.
DELTA ELECTRONICS, INC.	EADP-30HB B PA1015-2I120125	Input: 100-240V, 1A, 50-60Hz Output: 12V, 2.5A DC output cable(unshielded,1.5m)
POE*		
Brand	Model No.	Spec.
Fortinet	EPE-5818Gaf	DC48V, 0.375A

\* The POE must be supplied with the following adapter:

Brand	Model No.	Spec.
Powertron Electronics Corp.	PA1040-480IB080	Input: 100-240V, 1.5A, 50-60Hz AC input cable(unshielded, 1.55m with 1 core) Output: 48V, 0.8A, 38.4W Max

- The antennas provided to the EUT, please refer to the following table:

For 2.4GHz used						
Ant. No.	Transmitter Circuit	Model No.	Ant. Gain (dBi) Include cable loss	Frequency range (MHz to MHz)	Ant. Type	Connecter Type
1	Chain (0)	98141MRSX003	5	2400~2483.5	Dipole	R-SMA
2	Chain (1)	98141MRSX003	5	2400~2483.5	Dipole	R-SMA
For 5GHz used						
Ant. No.	Transmitter Circuit	Model No.	Ant. Gain (dBi) Include cable loss	Frequency range (MHz to MHz)	Ant. Type	Connecter Type
1	Chain (0)	98141URSX002	5	5150~5850	Dipole	R-SMA
2	Chain (1)	98141URSX002	5	5150~5850	Dipole	R-SMA



A D T

4. The EUT incorporates a MIMO function.

For 2.4G Band		
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION
802.11b	1 ~ 11Mbps	2TX / 2RX
802.11g	6 ~ 54Mbps	2TX / 2RX
802.11n (HT20) & 802.11n (HT40)	MCS 0~7	2TX / 2RX
	MCS 8~15	2TX / 2RX
For 5G Band		
802.11a	6 ~ 54Mbps	2TX / 2RX
802.11n (HT20) & 802.11n (HT40)	MCS 0~7	2TX / 2RX
	MCS 8~15	2TX / 2RX

5. EUT has been pre-tested under following pre-test modes.

Pre-test Mode	Power
A	Adapter
B	POE

From the above modes, the radiated emission worse case was found in **Mode A**. Therefore only the test data of the mode was recorded in this report.

6. The emission of the simultaneous operation (2.4GHz & 5GHz) has been evaluated and no non-compliance was found.
7. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 DESCRIPTION OF TEST MODES

#### Operated in 5725 ~ 5850MHz band:

5 channels are provided for 802.11a, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY
151	5755 MHz
159	5795 MHz

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
1	√	√	√	√	Adapter mode
2	√	-	-	-	POE mode

Where **PLC**: Power Line Conducted Emission      **RE < 1G**: Radiated Emission below 1GHz  
**RE ≥ 1G**: Radiated Emission above 1GHz      **APCM**: Antenna Port Conducted Measurement

**NOTE:** The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane** (for below 1GHz) and **Z-plane** (for above 1GHz).

#### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	149 to 165	157	OFDM	BPSK	6.5

#### **RADIATED EMISSION TEST (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	149 to 165	157	OFDM	BPSK	6.5



**RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	13.5

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	13.5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	24deg. C, 68,%RH	120Vac, 60Hz	Wythe Lin
	26deg. C, 67,%RH	120Vac, 60Hz	Wythe Lin
RE<1G	26deg. C, 68%RH	120Vac, 60Hz	Tim Ho
RE≥1G	24deg. C, 69%RH	120Vac, 60Hz	Tim Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart E (15.407)**

**789033 D02 General UNII Test Procedures New Rules v01**

**662911 D01 Multiple Transmitter Output v02r01**

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.


**Note:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

### 3.4 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is 100 %, duty factor is not required.

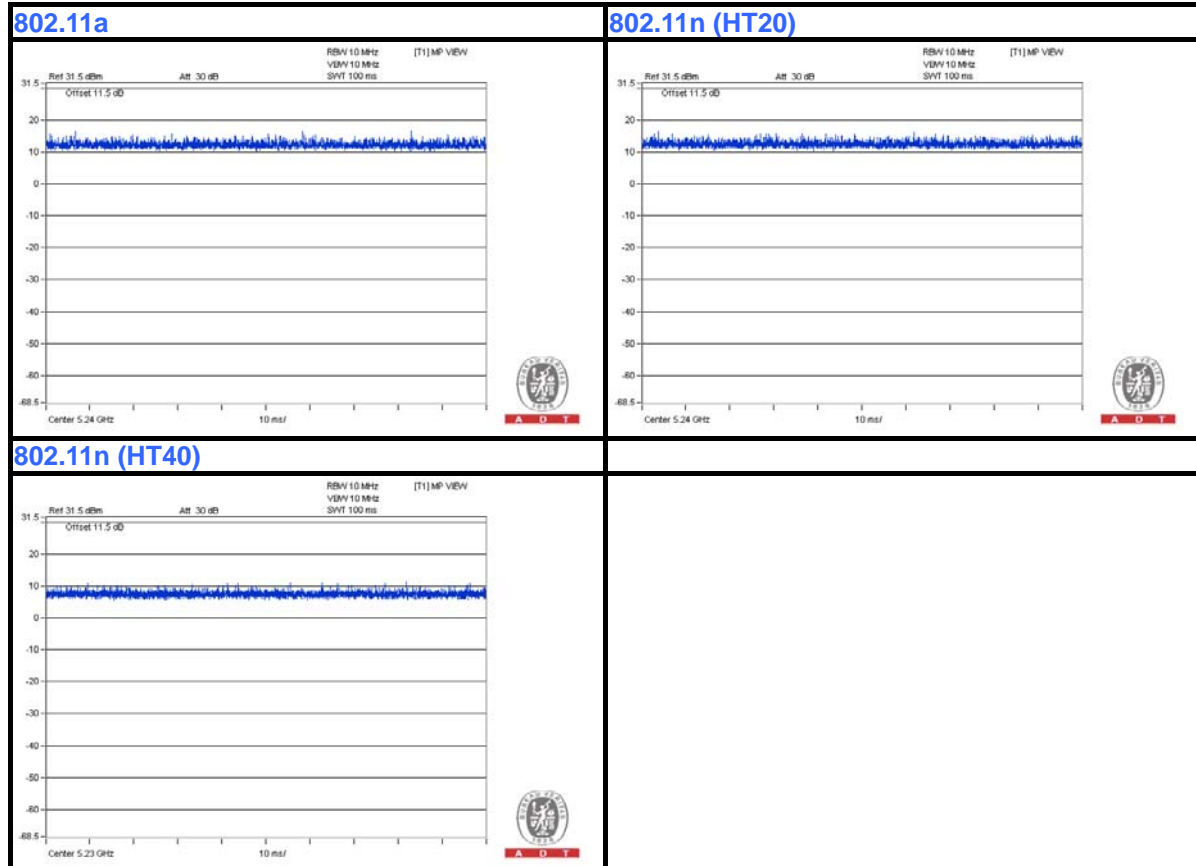

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID	Remark
A	NOTEBOOK COMPUTER	DELL	E5430	GM1SKV1	FCC DoC	Provided by Lab
B	Adapter (for conducted test)	DELTA ELECTRONICS, INC.	EADP-30HB B PA1015-2I120 125	NA	NA	Supplied by Client
	Adapter (for other test)	Powertron Electronics Corp.	PA1015-2I PA1015-2I120 125	NA	NA	Supplied by Client

**NOTE:**

1. All power cords of the above support units are non-shielded (1.8 m).

No.	Cable	Qty.	Length (m)	Shielded (Yes/ No)	Cores (Number)	Remark
1.	DC	1	1.5	No	0	Supplied by Client
2.	RJ-45	1	10	No	0	Provided by Lab
3.	DC	1	1.55	No	1	Supplied by Client
4.	GND	1	1.6	No	0	Provided by Lab
5.	RJ-45	1	3	No	0	Provided by Lab


**NOTE:**

1. The core(s) is(are) originally attached to the cable(s).



### 3.6 CONFIGURATION OF SYSTEM UNDER TEST


For Adapter Mode:

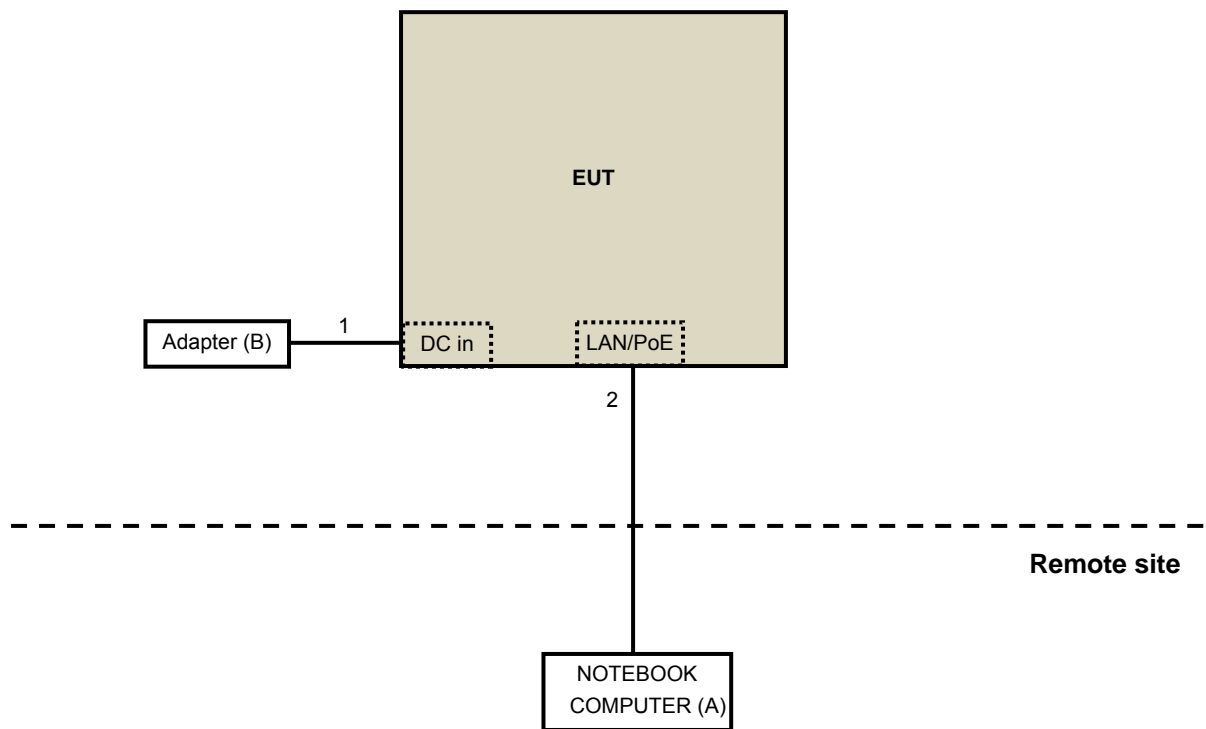



A D T

For PoE Mode:

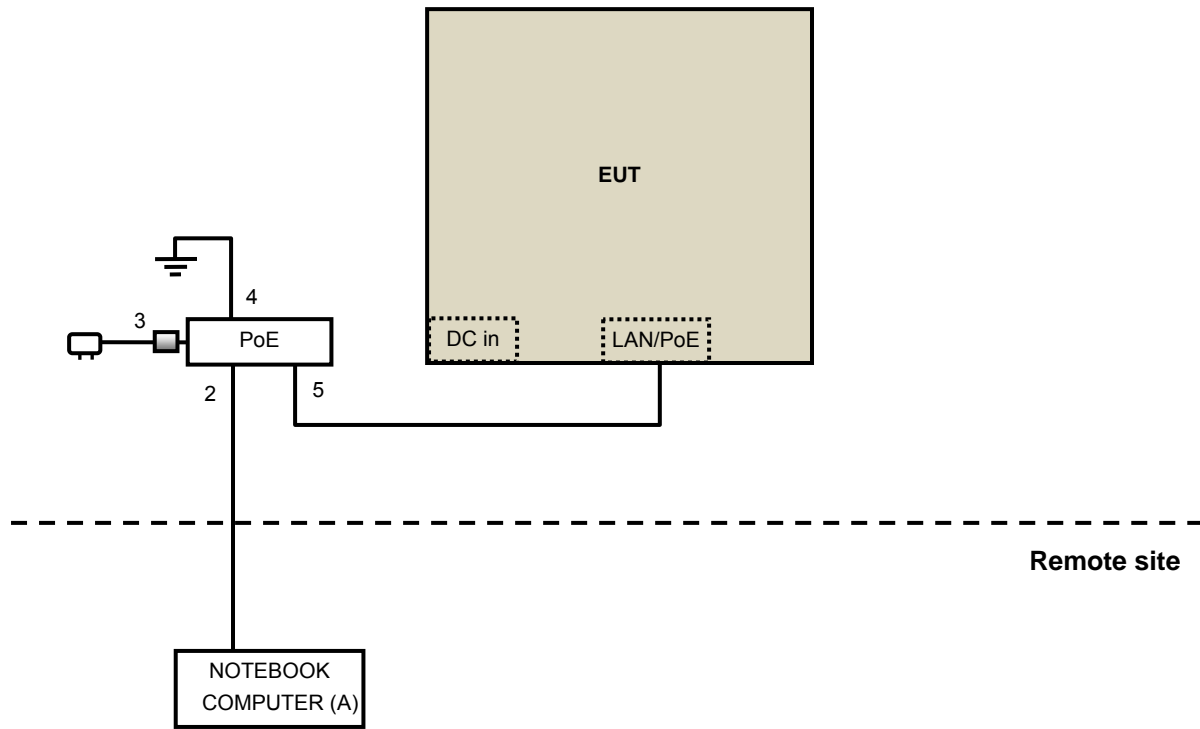



A D T

## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100287	Apr. 09, 2014	Apr. 08, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-523	Sep. 29, 2014	Sep. 28, 2015
RF Cable (JYBAO)	5D-FB	COACAB-001	May 26, 2014	May 25, 2015
50 ohms Terminator	50	3	Oct. 17, 2014	Oct. 16, 2015
50 ohms Terminator	N/A	EMC-04	Oct. 21, 2014	Oct. 20, 2015
Software ADT	BV ADT_Cond_V7.3.7 .3	NA	NA	NA
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ENV216	100072	June 10, 2014	June 09, 2015

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: Nov. 21 to 25, 2014

### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.


#### NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.1.5 TEST SETUP

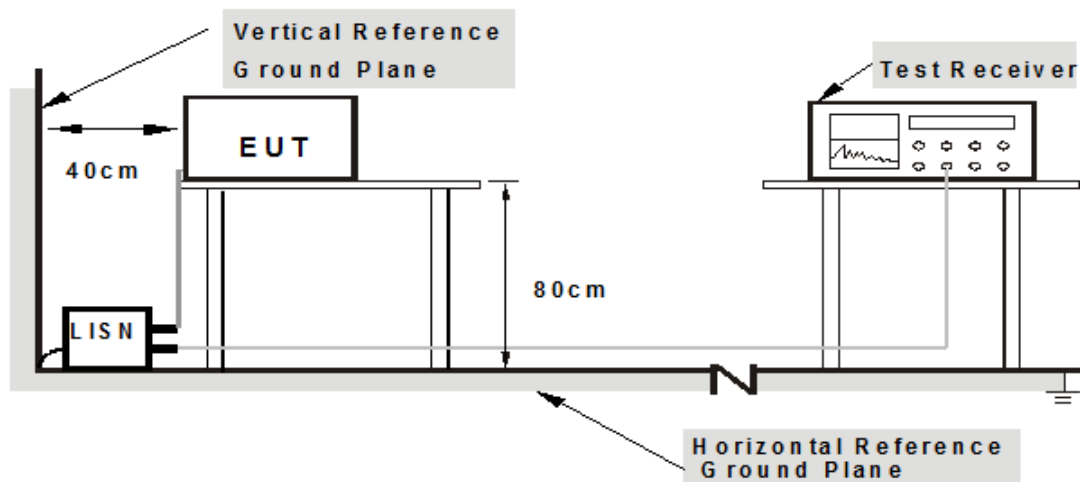

**Note: 1. Support units were connected to second LISN.**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit A (Notebook Computer) which is placed on table in remote site.
2. The communication partner run test program “artgui.exe” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


### 4.1.7 TEST RESULTS (MODE 1)

<b>PHASE</b>	Line (L)	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.07	44.39	34.06	44.46	34.13	63.74	53.74	-19.28	-19.61
2	0.39219	0.09	34.93	29.78	35.02	29.87	58.02	48.02	-23.00	-18.15
3	0.65391	0.11	30.03	28.58	30.14	28.69	56.00	46.00	-25.86	-17.31
4	1.82813	0.17	30.16	28.28	30.33	28.45	56.00	46.00	-25.67	-17.55
5	13.31250	0.54	30.57	24.79	31.11	25.33	60.00	50.00	-28.89	-24.67
6	22.47656	0.75	29.23	24.30	29.98	25.05	60.00	50.00	-30.02	-24.95

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

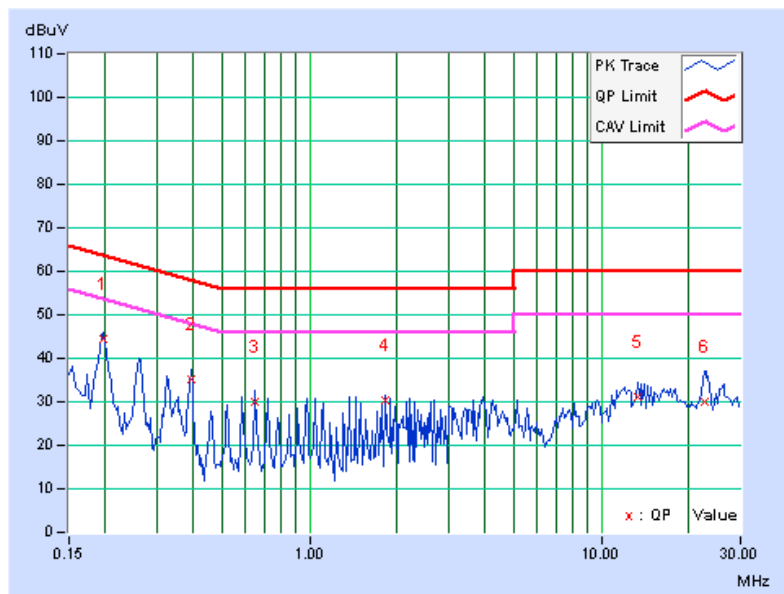


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.06	43.86	32.84	43.92	32.90	63.74	53.74	-19.82	-20.84
2	0.39219	0.09	35.05	30.12	35.14	30.21	58.02	48.02	-22.88	-17.81
3	0.65391	0.11	29.33	27.63	29.44	27.74	56.00	46.00	-26.56	-18.26
4	4.50553	0.28	27.63	22.09	27.91	22.37	56.00	46.00	-28.09	-23.63
5	13.25000	0.56	29.37	23.91	29.93	24.47	60.00	50.00	-30.07	-25.53
6	22.89063	0.80	29.61	24.64	30.41	25.44	60.00	50.00	-29.59	-24.56

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

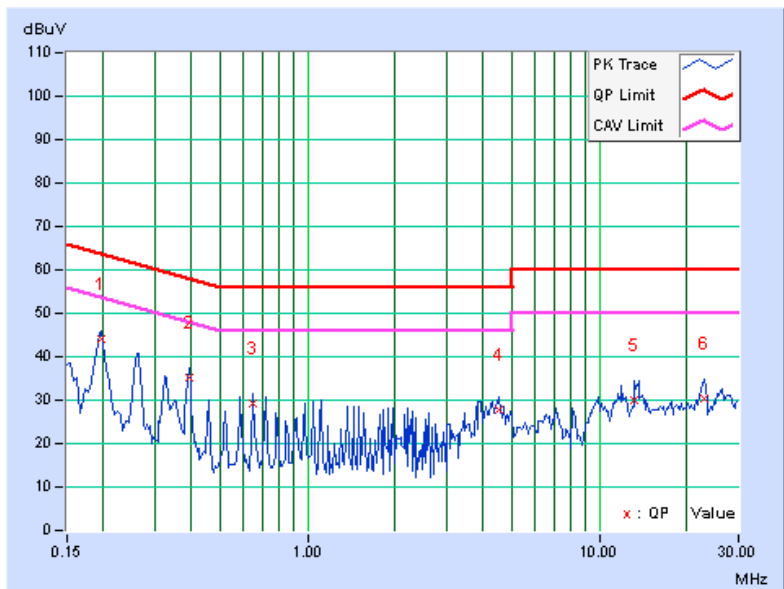


### 4.1.8 TEST RESULTS (MODE 2)

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.55572	0.10	44.43	37.14	44.53	37.24	56.00	46.00	-11.47	-8.76
2	0.70859	0.11	38.19	35.32	38.30	35.43	56.00	46.00	-17.70	-10.57
3	0.70859	0.11	38.27	35.32	38.38	35.43	56.00	46.00	-17.62	-10.57
4	0.95078	0.13	33.41	27.19	33.54	27.32	56.00	46.00	-22.46	-18.68
5	1.65387	0.16	38.66	36.65	38.82	36.81	56.00	46.00	-17.18	-9.19
6	2.12609	0.18	38.99	36.42	39.17	36.60	56.00	46.00	-16.83	-9.40
7	3.30659	0.23	36.07	33.58	36.30	33.81	56.00	46.00	-19.70	-12.19

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

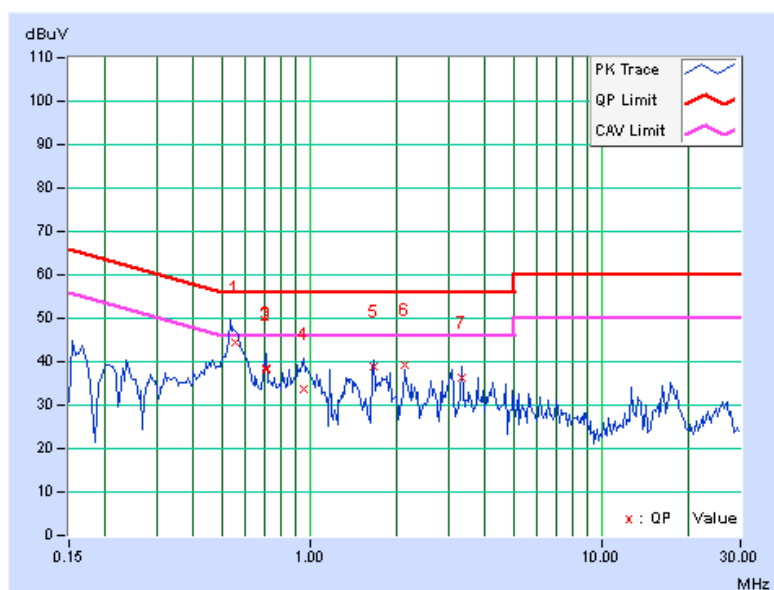




<b>PHASE</b>	Neutral (N)	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.54844	0.10	43.56	35.79	43.66	35.89	56.00	46.00	-12.34	-10.11
2	0.70859	0.11	37.20	34.57	37.31	34.68	56.00	46.00	-18.69	-11.32
3	1.18144	0.14	36.41	35.03	36.55	35.17	56.00	46.00	-19.45	-10.83
4	1.65347	0.16	38.15	36.09	38.31	36.25	56.00	46.00	-17.69	-9.75
5	2.12109	0.18	34.87	31.18	35.05	31.36	56.00	46.00	-20.95	-14.64
6	3.30469	0.23	35.02	31.68	35.25	31.91	56.00	46.00	-20.75	-14.09

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

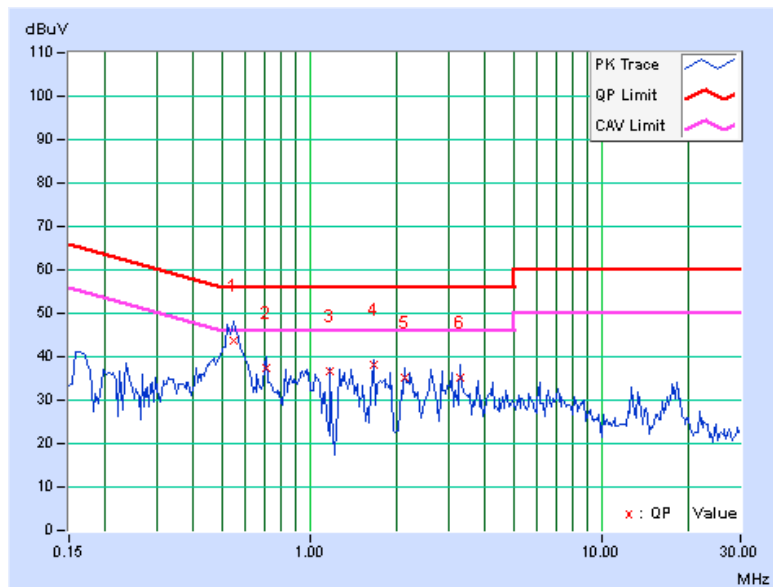

## 4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v01	FIELD STRENGTH AT 3m	
	PK:74 (dBµV/m)	AV:54 (dBµV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBµV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK:-27 (dBm/MHz) <sup>*1</sup> PK:-17 (dBm/MHz) <sup>*2</sup>	PK: 68.2(dBµV/m) <sup>*1</sup> PK:78.2 (dBµV/m) <sup>*2</sup>

**NOTE:** <sup>\*1</sup> beyond 10MHz of the band edge    <sup>\*2</sup> within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$



A D T

### 4.2.3 TEST INSTRUMENTS

For Below 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21, 2014	July 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 04, 2014	Oct. 03, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Aug. 27, 2014	Aug. 26, 2015
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	131205 131214 SNMY23684/4	Jan. 17, 2014	Jan. 16, 2015
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Pre-Amplifier EMCI	EMC184045	980143	Jan. 17, 2014	Jan. 16, 2015
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Aug. 26, 2014	Aug. 25, 2015
RF Cable	NA	RF104-121 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Antenna Tower & Turn Table CT	NA	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Nov. 07, 2014



A D T

**For Above 1GHz:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21, 2014	July 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 04, 2014	Oct. 03, 2015
Horn_Antenna AISL	AIH.8018	0000320091110	Aug. 27, 2014	Aug. 26, 2015
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	131205 131214 SNMY23684/4	Jan. 17, 2014	Jan. 16, 2015
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Pre-Amplifier EMCI	EMC184045	980143	Jan. 17, 2014	Jan. 16, 2015
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Aug. 26, 2014	Aug. 25, 2015
RF Cable	NA	RF104-121 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Antenna Tower & Turn Table CT	NA	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Nov. 24, 2014

#### 4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.5 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.6 TEST SETUP

##### <Frequency Range below 1GHz>

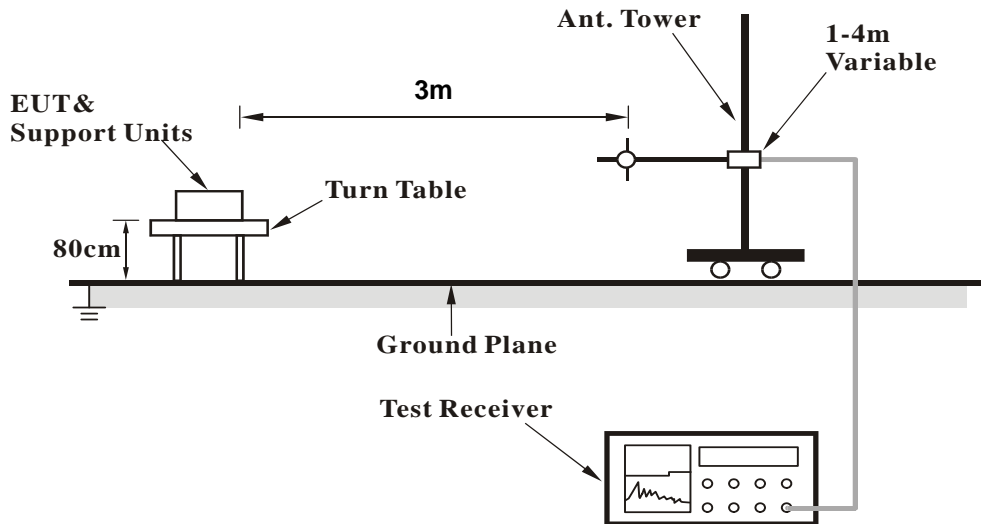

##### <Frequency Range above 1GHz>

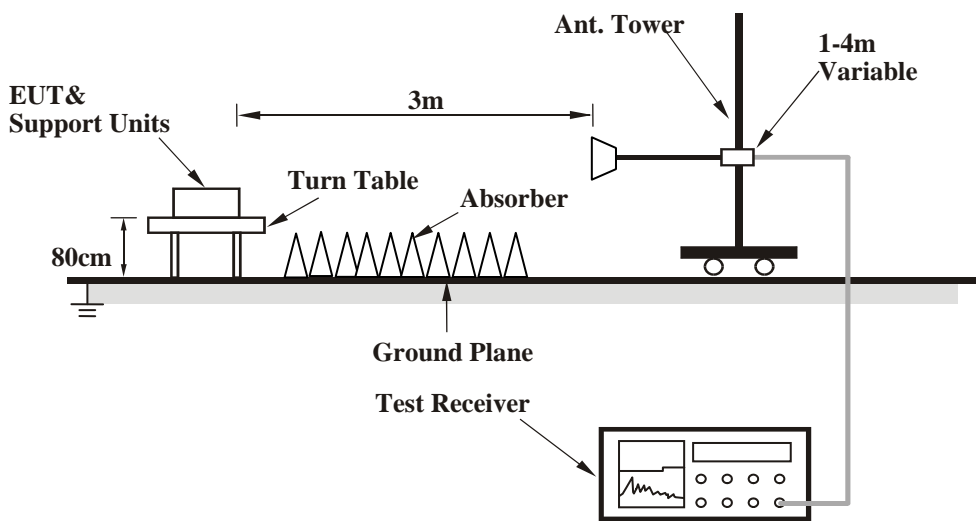

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.7 EUT OPERATING CONDITION

Same as 4.1.6

## 4.2.8 TEST RESULTS

### BELOW 1GHz WORST-CASE DATA

#### 802.11n (HT20)

<b>CHANNEL</b>	TX Channel 157	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	256.20	40.1 QP	46.0	-5.9	1.00 H	29	54.37	-14.23
2	262.95	41.4 QP	46.0	-4.6	1.00 H	360	55.33	-13.96
3	625.00	35.7 QP	46.0	-10.3	1.00 H	360	40.04	-4.31
4	750.03	32.5 QP	46.0	-13.5	1.00 H	360	34.21	-1.74
5	833.89	41.9 QP	46.0	-4.1	1.00 H	354	42.59	-0.67
6	875.02	35.4 QP	46.0	-10.6	1.00 H	360	35.64	-0.21
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.24	37.8 QP	40.0	-2.2	1.00 V	282	51.86	-14.02
2	70.84	35.4 QP	40.0	-4.6	1.00 V	81	51.31	-15.87
3	125.01	39.6 QP	43.5	-4.0	1.00 V	345	54.65	-15.10
4	261.15	42.6 QP	46.0	-3.5	1.50 V	9	56.59	-14.04
5	625.00	43.6 QP	46.0	-2.5	1.50 V	0	47.86	-4.31
6	834.08	43.9 QP	46.0	-2.1	1.50 V	1	44.53	-0.67

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value





## ABOVE 1GHz DATA

### 802.11a

<b>CHANNEL</b>	TX Channel 149	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	64.1 PK	74.0	-9.9	1.00 H	170	55.73	8.37
2	#5715.00	52.2 AV	54.0	-1.8	1.00 H	170	43.83	8.37
3	#5725.00	77.2 PK	78.2	-1.0	1.00 H	173	68.81	8.39
4	*5745.00	110.6 PK			1.00 H	173	102.18	8.42
5	*5745.00	100.8 AV			1.00 H	173	92.38	8.42
6	11490.00	60.4 PK	74.0	-13.6	1.20 H	238	46.05	14.35
7	11490.00	47.6 AV	54.0	-6.4	1.20 H	238	33.25	14.35
8	#17235.00	62.4 PK	74.0	-11.6	1.22 H	225	39.96	22.44
9	#17235.00	48.6 AV	54.0	-5.4	1.22 H	225	26.16	22.44

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	59.4 PK	74.0	-14.6	1.00 V	100	51.03	8.37
2	#5715.00	48.1 AV	54.0	-5.9	1.00 V	100	39.73	8.37
3	#5725.00	72.5 PK	78.2	-5.7	1.00 V	100	64.11	8.39
4	*5745.00	102.9 PK			1.00 V	100	94.48	8.42
5	*5745.00	92.3 AV			1.00 V	100	83.88	8.42
6	11490.00	57.1 PK	74.0	-16.9	1.10 V	327	42.75	14.35
7	11490.00	45.8 AV	54.0	-8.2	1.10 V	327	31.45	14.35
8	#17235.00	57.2 PK	74.0	-16.8	1.05 V	328	34.76	22.44
9	#17235.00	47.5 AV	54.0	-6.5	1.05 V	328	25.06	22.44

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 157	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5700.00	56.6 PK	74.0	-17.4	1.00 H	172	48.25	8.35
2	#5700.00	46.8 AV	54.0	-7.2	1.00 H	172	38.45	8.35
3	#5725.00	61.9 PK	78.2	-16.3	1.00 H	172	53.51	8.39
4	*5785.00	115.1 PK			1.00 H	172	106.61	8.49
5	*5785.00	104.2 AV			1.00 H	172	95.71	8.49
6	#5850.00	58.3 PK	78.2	-19.9	1.00 H	172	49.63	8.67
7	#5860.00	53.8 PK	74.0	-20.2	1.00 H	172	45.09	8.71
8	#5860.00	40.9 AV	54.0	-13.1	1.00 H	172	32.19	8.71
9	11570.00	61.4 PK	74.0	-12.6	1.25 H	242	47.09	14.31
10	11570.00	48.9 AV	54.0	-5.1	1.25 H	242	34.59	14.31
11	#17355.00	67.2 PK	74.0	-6.8	1.00 H	220	44.20	23.00
12	#17355.00	52.7 AV	54.0	-1.3	1.00 H	220	29.70	23.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5700.00	55.4 PK	74.0	-18.6	1.00 V	124	47.05	8.35
2	#5700.00	45.2 AV	54.0	-8.8	1.00 V	124	36.85	8.35
3	#5725.00	56.5 PK	78.2	-21.7	1.00 V	124	48.11	8.39
4	*5785.00	108.2 PK			1.00 V	124	99.71	8.49
5	*5785.00	97.1 AV			1.00 V	124	88.61	8.49
6	#5850.00	70.1 PK	78.2	-8.1	1.00 V	124	61.43	8.67
7	#5860.00	54.8 PK	74.0	-19.2	1.00 V	124	46.09	8.71
8	#5860.00	44.2 AV	54.0	-9.8	1.00 V	124	35.49	8.71
9	11570.00	59.2 PK	74.0	-14.8	1.05 V	323	44.89	14.31
10	11570.00	47.5 AV	54.0	-6.5	1.05 V	323	33.19	14.31
11	#17355.00	60.2 PK	74.0	-13.8	1.02 V	321	37.20	23.00
12	#17355.00	48.4 AV	54.0	-5.6	1.02 V	321	25.40	23.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 165	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.8 PK			1.16 H	183	105.21	8.59
2	*5825.00	102.1 AV			1.16 H	183	93.51	8.59
3	#5850.00	77.1 PK	78.2	-1.1	1.16 H	183	68.43	8.67
4	#5860.00	70.7 PK	74.0	-3.3	1.16 H	183	61.99	8.71
5	#5860.00	49.2 AV	54.0	-4.8	1.16 H	183	40.49	8.71
6	11650.00	60.0 PK	74.0	-14.0	1.23 H	253	45.62	14.38
7	11650.00	47.3 AV	54.0	-6.7	1.23 H	253	32.92	14.38
8	#17475.00	67.4 PK	74.0	-6.6	1.00 H	214	44.10	23.30
9	#17475.00	52.3 AV	54.0	-1.7	1.00 H	214	29.00	23.30

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	106.1 PK			1.00 V	114	97.51	8.59
2	*5825.00	94.3 AV			1.00 V	114	85.71	8.59
3	#5850.00	71.9 PK	78.2	-6.3	1.00 V	114	63.23	8.67
4	#5860.00	63.5 PK	74.0	-10.5	1.00 V	114	54.79	8.71
5	#5860.00	46.2 AV	54.0	-7.8	1.00 V	114	37.49	8.71
6	11650.00	58.4 PK	74.0	-15.6	1.10 V	317	44.02	14.38
7	11650.00	46.6 AV	54.0	-7.4	1.10 V	317	32.22	14.38
8	#17475.00	59.2 PK	74.0	-14.8	1.01 V	343	35.90	23.30
9	#17475.00	49.0 AV	54.0	-5.0	1.01 V	343	25.70	23.30

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

<b>CHANNEL</b>	TX Channel 149	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	61.1 PK	74.0	-12.9	1.00 H	171	52.73	8.37
2	#5715.00	50.6 AV	54.0	-3.4	1.00 H	171	42.23	8.37
3	#5725.00	77.0 PK	78.2	-1.2	1.00 H	166	68.61	8.39
4	*5745.00	111.9 PK			1.00 H	171	103.48	8.42
5	*5745.00	101.1 AV			1.00 H	171	92.68	8.42
6	11490.00	60.5 PK	74.0	-13.5	1.17 H	228	46.15	14.35
7	11490.00	47.6 AV	54.0	-6.4	1.17 H	228	33.25	14.35
8	#17235.00	67.4 PK	74.0	-6.6	1.04 H	205	44.96	22.44
9	#17235.00	53.0 AV	54.0	-1.0	1.04 H	205	30.56	22.44

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	58.7 PK	74.0	-15.3	1.03 V	97	50.33	8.37
2	#5715.00	47.6 AV	54.0	-6.4	1.03 V	97	39.23	8.37
3	#5725.00	72.1 PK	78.2	-6.1	1.03 V	97	63.71	8.39
4	*5745.00	104.3 PK			1.03 V	97	95.88	8.42
5	*5745.00	94.1 AV			1.03 V	97	85.68	8.42
6	11490.00	57.2 PK	74.0	-16.8	1.15 V	338	42.85	14.35
7	11490.00	46.1 AV	54.0	-7.9	1.15 V	338	31.75	14.35
8	#17235.00	56.7 PK	74.0	-17.3	1.09 V	333	34.26	22.44
9	#17235.00	47.2 AV	54.0	-6.8	1.09 V	333	24.76	22.44

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 157	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	57.3 PK	74.0	-16.7	1.00 H	171	48.93	8.37
2	#5715.00	46.8 AV	54.0	-7.2	1.00 H	171	38.43	8.37
3	#5725.00	67.1 PK	78.2	-11.1	1.00 H	171	58.71	8.39
4	*5785.00	114.9 PK			1.00 H	171	106.41	8.49
5	*5785.00	104.1 AV			1.00 H	171	95.61	8.49
6	#5850.00	63.1 PK	78.2	-15.1	1.00 H	171	54.43	8.67
7	#5860.00	53.9 PK	74.0	-20.1	1.00 H	171	45.19	8.71
8	#5860.00	41.6 AV	54.0	-12.4	1.00 H	171	32.89	8.71
9	11570.00	61.9 PK	74.0	-12.1	1.15 H	228	47.59	14.31
10	11570.00	48.6 AV	54.0	-5.4	1.15 H	228	34.29	14.31
11	#17355.00	67.4 PK	74.0	-6.6	1.00 H	181	44.40	23.00
12	#17355.00	52.9 AV	54.0	-1.1	1.00 H	181	29.90	23.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	60.4 PK	74.0	-13.6	1.00 V	89	52.03	8.37
2	#5715.00	44.4 AV	54.0	-9.6	1.00 V	89	36.03	8.37
3	#5725.00	65.2 PK	78.2	-13.0	1.00 V	89	56.81	8.39
4	*5785.00	107.2 PK			1.00 V	89	98.71	8.49
5	*5785.00	96.5 AV			1.00 V	89	88.01	8.49
6	#5850.00	58.4 PK	78.2	-19.8	1.00 V	89	49.73	8.67
7	#5860.00	51.4 PK	74.0	-22.6	1.00 V	89	42.69	8.71
8	#5860.00	39.8 AV	54.0	-14.2	1.00 V	89	31.09	8.71
9	11570.00	58.5 PK	74.0	-15.5	1.09 V	339	44.19	14.31
10	11570.00	46.5 AV	54.0	-7.5	1.09 V	339	32.19	14.31
11	#17355.00	58.6 PK	74.0	-15.4	1.09 V	340	35.60	23.00
12	#17355.00	48.4 AV	54.0	-5.6	1.09 V	340	25.40	23.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 165	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.2 PK			1.16 H	183	104.61	8.59
2	*5825.00	101.8 AV			1.16 H	183	93.21	8.59
3	#5850.00	77.0 PK	78.2	-1.2	1.16 H	181	68.33	8.67
4	#5860.00	68.9 PK	74.0	-5.1	1.16 H	181	60.19	8.71
5	#5860.00	49.9 AV	54.0	-4.1	1.16 H	181	41.19	8.71
6	11650.00	61.0 PK	74.0	-13.0	1.18 H	229	46.62	14.38
7	11650.00	47.9 AV	54.0	-6.1	1.18 H	229	33.52	14.38
8	#17475.00	67.1 PK	74.0	-6.9	1.26 H	210	43.80	23.30
9	#17475.00	52.6 AV	54.0	-1.4	1.26 H	210	29.30	23.30

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	105.2 PK			1.02 V	102	96.61	8.59
2	*5825.00	93.9 AV			1.02 V	102	85.31	8.59
3	#5850.00	72.0 PK	78.2	-6.2	1.02 V	102	63.33	8.67
4	#5860.00	59.6 PK	74.0	-14.4	1.02 V	102	50.89	8.71
5	#5860.00	48.5 AV	54.0	-5.5	1.02 V	102	39.79	8.71
6	11650.00	58.3 PK	74.0	-15.7	1.14 V	312	43.92	14.38
7	11650.00	46.5 AV	54.0	-7.5	1.14 V	312	32.12	14.38
8	#17475.00	59.2 PK	74.0	-14.8	1.08 V	313	35.90	23.30
9	#17475.00	48.7 AV	54.0	-5.3	1.08 V	313	25.40	23.30

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

**802.11n (HT40)**

<b>CHANNEL</b>	TX Channel 151	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	71.9 PK	74.0	-2.1	1.00 H	166	63.53	8.37
2	#5715.00	52.7 AV	54.0	-1.3	1.00 H	166	44.33	8.37
3	#5725.00	76.9 PK	78.2	-1.3	1.00 H	173	68.51	8.39
4	*5755.00	106.1 PK			1.00 H	173	97.66	8.44
5	*5755.00	95.8 AV			1.00 H	173	87.36	8.44
6	11510.00	59.4 PK	74.0	-14.6	1.16 H	253	45.06	14.34
7	11510.00	46.5 AV	54.0	-7.5	1.16 H	253	32.16	14.34
8	#17265.00	63.2 PK	74.0	-10.8	1.19 H	234	40.52	22.68
9	#17265.00	49.7 AV	54.0	-4.3	1.19 H	234	27.02	22.68

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	59.8 PK	74.0	-14.2	1.02 V	102	51.43	8.37
2	#5715.00	48.3 AV	54.0	-5.7	1.02 V	102	39.93	8.37
3	#5725.00	72.5 PK	78.2	-5.7	1.02 V	102	64.11	8.39
4	*5755.00	98.2 PK			1.02 V	102	89.76	8.44
5	*5755.00	88.1 AV			1.02 V	102	79.66	8.44
6	11510.00	58.5 PK	74.0	-15.5	1.05 V	314	44.16	14.34
7	11510.00	45.8 AV	54.0	-8.2	1.05 V	314	31.46	14.34
8	#17265.00	58.2 PK	74.0	-15.8	1.06 V	322	35.52	22.68
9	#17265.00	47.8 AV	54.0	-6.2	1.06 V	322	25.12	22.68

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 159	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	111.7 PK			1.18 H	180	103.20	8.50
2	*5795.00	100.9 AV			1.18 H	180	92.40	8.50
3	#5850.00	72.2 PK	78.2	-6.0	1.16 H	180	63.53	8.67
4	#5860.00	68.2 PK	74.0	-5.8	1.16 H	183	59.49	8.71
5	<b>#5860.00</b>	<b>53.1 AV</b>	<b>54.0</b>	<b>-0.9</b>	<b>1.16 H</b>	<b>183</b>	<b>44.39</b>	<b>8.71</b>
6	11590.00	60.1 PK	74.0	-13.9	1.18 H	234	45.80	14.30
7	11590.00	47.1 AV	54.0	-6.9	1.18 H	234	32.80	14.30
8	#17385.00	64.8 PK	74.0	-9.2	1.22 H	219	41.77	23.03
9	#17385.00	50.1 AV	54.0	-3.9	1.22 H	219	27.07	23.03

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	104.2 PK			1.03 V	104	95.70	8.50
2	*5795.00	93.1 AV			1.03 V	104	84.60	8.50
3	#5850.00	67.3 PK	78.2	-10.9	1.03 V	104	58.63	8.67
4	#5860.00	59.9 PK	74.0	-14.1	1.03 V	104	51.19	8.71
5	#5860.00	48.5 AV	54.0	-5.5	1.03 V	104	39.79	8.71
6	11590.00	58.1 PK	74.0	-15.9	1.05 V	301	43.80	14.30
7	11590.00	45.7 AV	54.0	-8.3	1.05 V	301	31.40	14.30
8	#17385.00	57.9 PK	74.0	-16.1	1.08 V	308	34.87	23.03
9	#17385.00	47.6 AV	54.0	-6.4	1.08 V	308	24.57	23.03

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



### 4.3 TRANSMIT POWER MEASUREMENT

#### 4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

**Note:** Where B is the 26dB emission bandwidth in MHz.

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT  $\leq$  4;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq$  40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT  $\geq$  5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.



A D T

### 4.3.2 TEST INSTRUMENTS

#### FOR POWER OUTPUT MEASUREMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power meter Anritsu	ML2495A	1014008	Apr. 30, 2014	Apr. 29, 2015
Power sensor Anritsu	MA2411B	0917122	Apr. 30, 2014	Apr. 29, 2015

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Nov. 25, 2014

#### FOR 26dB OCCUPIED BANDWIDTH

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2014	May 07, 2015

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Nov. 25, 2014

### 4.3.3 TEST PROCEDURE

#### FOR POWER OUTPUT MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

#### FOR 26dB OCCUPIED BANDWIDTH


1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 4.3.4 DEVIATION FROM TEST STANDARD


No deviation

#### 4.3.5 TEST SETUP

##### FOR POWER OUTPUT MEASUREMENT



##### FOR 26dB OCCUPIED BANDWIDTH



#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

### 4.3.7 TEST RESULTS

#### 802.11a

##### CONDUCTED POWER:

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	12.47	12.89	37.114	15.70	30	PASS
157	5785	17.02	17.26	103.561	20.15	30	PASS
165	5825	15.98	14.75	69.482	18.42	30	PASS

#### 802.11n (HT20)

##### CONDUCTED POWER:

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	11.85	12.37	32.569	15.13	30	PASS
157	5785	17.13	17.87	112.877	20.53	30	PASS
165	5825	14.67	15.98	68.937	18.38	30	PASS

#### 802.11n (HT40)

##### CONDUCTED POWER:

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	10.87	10.87	24.436	13.88	30	PASS
159	5795	15.59	16.08	76.775	18.85	30	PASS



A D T

#### 4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

##### 4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A	---		11dBm/ MHz
U-NII-2C	---		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

##### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2014	May 07, 2015

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Nov. 25, 2014

#### 4.4.3 TEST PROCEDURES

Using method SA-1


**For U-NII-3:**

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW  $\geq$  1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6



A D T

## 4.4.7 TEST RESULTS

### 802.11a

TX CHAIN	CHANNEL	FREQUENCY (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	TOTAL PSD (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
0	149	5745	-11.14	-8.92	3.01	-5.91	27.99	PASS
	157	5785	-7.00	-4.78	3.01	-1.77	27.99	PASS
	165	5825	-9.55	-7.33	3.01	-4.32	27.99	PASS
1	149	5745	-9.81	-7.59	3.01	-4.58	27.99	PASS
	157	5785	-6.34	-4.12	3.01	-1.11	27.99	PASS
	165	5825	-8.21	-5.99	3.01	-2.98	27.99	PASS

**NOTE:** Directional gain =  $5\text{dBi} + 10\log(2) = 8.01\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $30-(8.01-6) = 27.99\text{dBm}$ .

### 802.11n (HT20)

TX CHAIN	CHANNEL	FREQUENCY (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	TOTAL PSD (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
0	149	5745	-12.18	-9.96	3.01	-6.95	27.99	PASS
	157	5785	-7.65	-5.43	3.01	-2.42	27.99	PASS
	165	5825	-10.39	-8.17	3.01	-5.16	27.99	PASS
1	149	5745	-11.14	-8.92	3.01	-5.91	27.99	PASS
	157	5785	-6.18	-3.96	3.01	-0.95	27.99	PASS
	165	5825	-8.81	-6.59	3.01	-3.58	27.99	PASS

**NOTE:** Directional gain =  $5\text{dBi} + 10\log(2) = 8.01\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $30-(8.01-6) = 27.99\text{dBm}$ .

### 802.11n (HT40)

TX CHAIN	CHANNEL	FREQUENCY (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	TOTAL PSD (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
0	151	5755	-17.82	-15.60	3.01	-12.59	27.99	PASS
	159	5795	-12.58	-10.36	3.01	-7.35	27.99	PASS
1	151	5755	-16.53	-14.31	3.01	-11.30	27.99	PASS
	159	5795	-11.03	-8.81	3.01	-5.80	27.99	PASS

**NOTE:** Directional gain =  $5\text{dBi} + 10\log(2) = 8.01\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $30-(8.01-6) = 27.99\text{dBm}$ .







A D T

### SPECTRUM PLOT OF WORST VALUE


#### 802.11a / Chain(1) : CH157

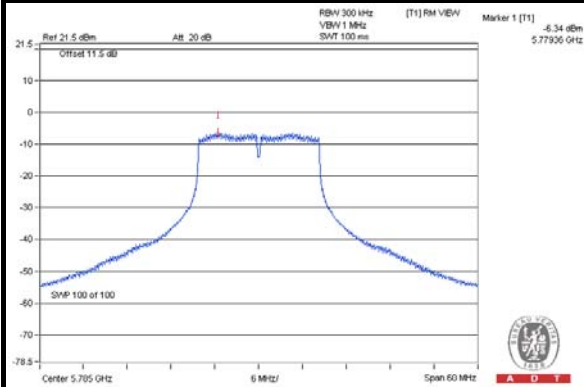

#### 802.11n (HT20) / Chain(1) : CH157

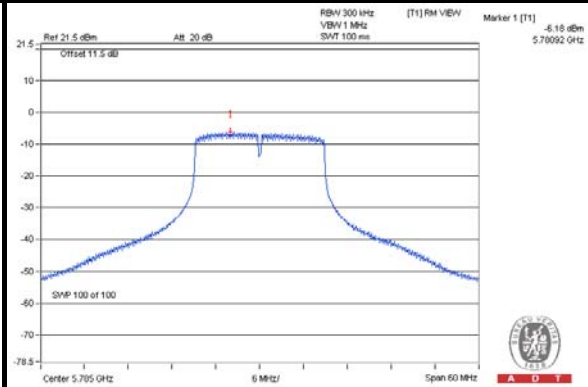

#### 802.11n (HT40) / Chain(1) : CH159

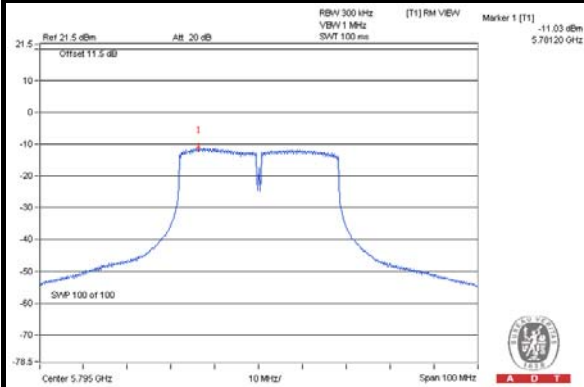

## 4.5 FREQUENCY STABILITY

### 4.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2014	May 07, 2015
Temperature Humidity Chamber GIANTFORCE &	GTH-150-40-SP -AR	MAA0812-008	Jan. 13, 2014	Jan. 12, 2015

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Nov. 25, 2014


### 4.5.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP

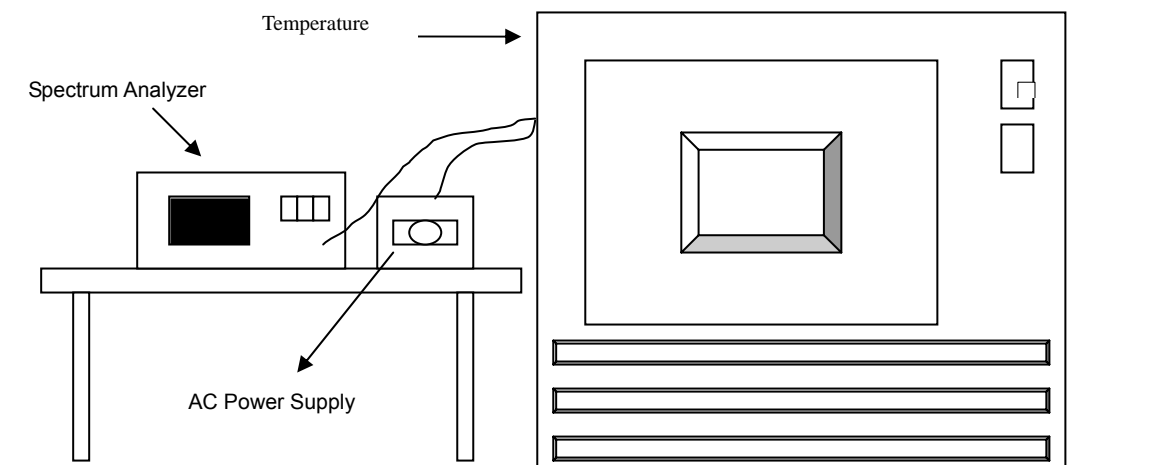

#### 4.5.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



A D T

### 4.5.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5825MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	120	5825.0194	0.00033	5825.0239	0.00041	5825.0244	0.00042	5825.0196	0.00034
40	120	5824.98	-0.00034	5824.9806	-0.00033	5824.9823	-0.00030	5824.978	-0.00038
30	120	5824.9764	-0.00041	5824.9772	-0.00039	5824.9768	-0.00040	5824.979	-0.00036
20	120	5824.9888	-0.00019	5824.9881	-0.00020	5824.9857	-0.00025	5824.9853	-0.00025
10	120	5824.9864	-0.00023	5824.9856	-0.00025	5824.9876	-0.00021	5824.9863	-0.00024
0	120	5824.9972	-0.00005	5824.999	-0.00002	5824.9993	-0.00001	5824.9981	-0.00003
-10	120	5825.0134	0.00023	5825.0096	0.00016	5825.0137	0.00024	5825.0126	0.00022
-20	120	5824.9686	-0.00054	5824.9712	-0.00049	5824.9689	-0.00053	5824.9735	-0.00045
-30	120	5824.993	-0.00012	5824.9917	-0.00014	5824.9896	-0.00018	5824.9894	-0.00018

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5825MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	138	5824.9889	-0.00019	5824.9873	-0.00022	5824.9849	-0.00026	5824.985	-0.00026
	120	5824.9888	-0.00019	5824.9881	-0.00020	5824.9857	-0.00025	5824.9853	-0.00025
	102	5824.9897	-0.00018	5824.9875	-0.00021	5824.9863	-0.00024	5824.9842	-0.00027

## 4.6 6dB BANDWIDTH MEASUREMENT

### 4.6.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2014	May 07, 2015

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Nov. 25, 2014


### 4.6.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.5 TEST SETUP



#### 4.6.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

#### 4.6.7 TEST RESULTS

##### 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	16.62	16.48	0.5	PASS
157	5785	16.61	16.51	0.5	PASS
165	5825	16.58	16.54	0.5	PASS

##### 802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	17.77	17.75	0.5	PASS
157	5785	17.87	17.76	0.5	PASS
165	5825	17.86	17.85	0.5	PASS

##### 802.11n (HT40)


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	36.63	36.59	0.5	PASS
159	5795	36.65	36.59	0.5	PASS




A D T

### SPECTRUM PLOT OF WORST VALUE


#### 802.11a / Chain(1): CH149

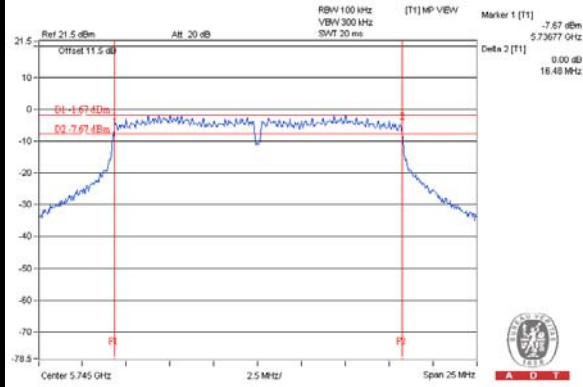

#### 802.11n (HT20) / Chain(1) : CH149

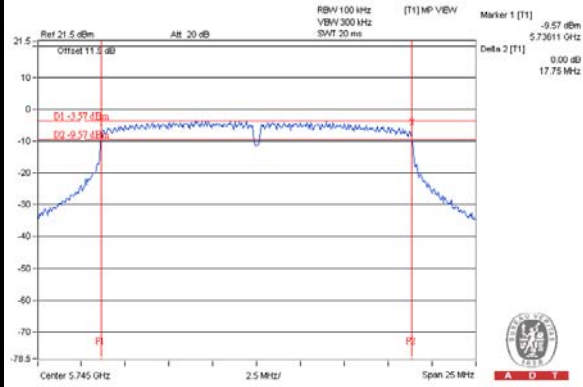

#### 802.11n (HT40) / Chain(1) : CH151

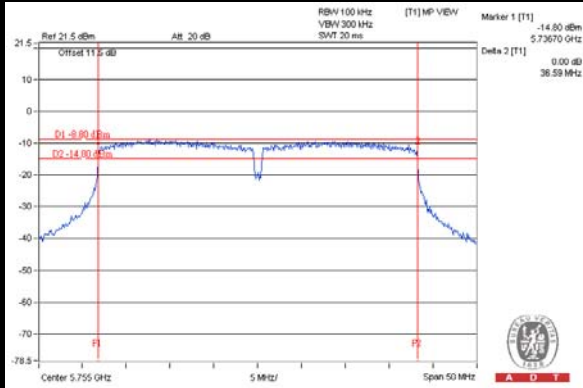



## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF/Telecom Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

## 7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---