

## FCC Test Report

**Report No.:** RF150413C26

**FCC ID:** TVE-26155055

**Test Model:** FAP-S322CR

**Series Model:** FortiAP-S322CRxxxxxx, FAP-S322CRxxxxxx, FORTIAP-S322CRxxxxxx  
(where "x" can be used as "A-Z", or "0-9", or "-", or blank for software changes or marketing purposes only) (refer to item 3.1 for more details)

**Received Date:** Apr. 13, 2015

**Test Date:** Jun. 05 ~ Jul. 17, 2015

**Issued Date:** Jul. 28, 2015

**Applicant:** Fortinet Inc.

**Address:** 899 Kifer Road Sunnyvale, CA 94086 USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

**Test Location:** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



### Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Modification Record .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes .....	8
3.2.1 Test Mode Applicability and Tested Channel Detail .....	9
3.3 Duty Cycle of Test Signal .....	11
3.4 Description of Support Units .....	12
3.4.1 Configuration of System under Test .....	12
3.5 General Description of Applied Standards .....	13
<b>4 Test Types and Results</b> .....	<b>14</b>
4.1 Radiated Emission and Bandedge Measurement.....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	14
4.1.2 Test Instruments .....	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard .....	16
4.1.5 Test Set Up .....	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results .....	19
4.2 Conducted Emission Measurement .....	32
4.2.1 Limits of Conducted Emission Measurement .....	32
4.2.2 Test Instruments .....	32
4.2.3 Test Procedures.....	33
4.2.4 Deviation from Test Standard .....	33
4.2.5 Test Setup.....	33
4.2.6 EUT Operating Conditions.....	33
4.2.7 Test Results .....	34
4.3 6dB Bandwidth Measurement.....	36
4.3.1 Limits of 6dB Bandwidth Measurement .....	36
4.3.2 Test Setup.....	36
4.3.3 Test Instruments .....	36
4.3.4 Test Procedure .....	36
4.3.5 Deviation from Test Standard .....	36
4.3.6 EUT Operating Conditions.....	36
4.3.7 Test Result.....	37
4.4 Conducted Output Power Measurement.....	39
4.4.1 Limits of Conducted Output Power Measurement .....	39
4.4.2 Test Setup.....	39
4.4.3 Test Instruments .....	39
4.4.4 Test Procedures.....	39
4.4.5 Deviation from Test Standard .....	39
4.4.6 EUT Operating Conditions.....	39
4.4.7 Test Results .....	40
4.5 Power Spectral Density Measurement.....	41
4.5.1 Limits of Power Spectral Density Measurement .....	41
4.5.2 Test Setup.....	41
4.5.3 Test Instruments .....	41
4.5.4 Test Procedure .....	41
4.5.5 Deviation from Test Standard .....	41



4.5.6 EUT Operating Condition .....	41
4.5.7 Test Results .....	42
4.6 Conducted Out of Band Emission Measurement.....	45
4.6.1 Limits of Conducted Out of Band Emission Measurement .....	45
4.6.2 Test Setup.....	45
4.6.3 Test Instruments .....	45
4.6.4 Test Procedure .....	45
4.6.5 Deviation from Test Standard .....	45
4.6.6 EUT Operating Condition .....	45
4.6.7 Test Results .....	45
<b>5 Pictures of Test Arrangements.....</b>	<b>58</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>59</b>



A D T

### Release Control Record

Issue No.	Description	Date Issued
RF150413C26	Original release.	Jul. 28, 2015

## 1 Certificate of Conformity

**Product:** Secured Wireless Access Point

**Brand:** Fortinet Inc.

**Test Model:** FAP-S322CR

**Series Model:** FortiAP-S322CRxxxxxx, FAP-S322CRxxxxxx, FORTIAP-S322CRxxxxxx (where "x" can be used as "A-Z", or "0-9", or "-", or blank for software changes or marketing purposes only) (refer to item 3.1 for more details)

**Sample Status:** Engineering sample

**Applicant:** Fortinet Inc.

**Test Date:** Jun. 05 ~ Jul. 17, 2015

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Polly Chien , **Date:** Jul. 28, 2015  
Polly Chien / Specialist

**Approved by :** Ken Liu , **Date:** Jul. 28, 2015  
Ken Liu / Senior Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.38dB at 0.52927MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 2483.50MHz & 2390.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is N-Type. (The device is professionally installed)

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.59 dB
	200MHz ~ 1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Secured Wireless Access Point
Brand	Fortinet Inc.
Test Model	FAP-S322CR
Series Model	FortiAP-S322CRxxxxxx, FAP-S322CRxxxxxx, FORTIAP-S322CRxxxxxx (where "x" can be used as "A-Z", or "0-9", or "-", or blank for software changes or marketing purposes only)
Model Difference	Refer to note for more details
Status of EUT	Engineering sample
Power Supply Rating	48Vdc (POE)
Modulation Type	CCK, DQPSK, DBPSK for DSSS; 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 450.0Mbps
Operating Frequency	2412 ~ 2462MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
Output Power	985.045mW
Antenna Type	Dipole antenna with 4.89dBi gain
Antenna Connector	N-Type (The device is professionally installed)
Accessory Device	POE, adapter (for POE used), surge protector
Cable Supplied	1.8m non-shielded grounding cable w/o core

Note:

1. All models are listed as below. Model FAP-S322CR is the representative for final test.

Brand	Model	Difference
Fortinet Inc.	FortiAP-S322CRxxxxxx	where "x" can be used as "A-Z", or "0-9", or "-", or blank for software changes or marketing purposes only
	FAP-S322CRxxxxxx	
	FORTIAP-S322CRxxxxxx	

2. The EUT incorporates a MIMO function. Physically, the EUT provides 3 completed transmitters and 3 receivers.

Modulation Mode	TX Function
802.11b	3TX
802.11g	3TX
802.11n (HT20)	3TX
802.11n (HT40)	3TX

3. The EUT uses following POE and adapter (for POE used).

POE	
Brand	EnGenius
Model	EPE-48GR
Rating	48Vdc

Adapter for POE used	
Brand	Powertron Electronics Corp.
Model	PA1040-480IB080
Input Power	100-240V~50-60Hz 1.5A
Output Power	48Vdc, 0.8A, 38.4W Max
Power Line	1.55m power cable with 1 core attached on adapter

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement  
**RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission  
**APCM**: Antenna Port Conducted Measurement

#### **Radiated Emission Test (Above 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

#### **Radiated Emission Test (Below 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	6	DSSS	DBPSK	1.0

#### **Power Line Conducted Emission Test:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	6	DSSS	DBPSK	1.0

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

**Test Condition:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (POE)	TESTED BY
RE $\geq$ 1G	27deg. C, 62%RH	48Vdc	Alan Wu
RE $<$ 1G	26deg. C, 63%RH	48Vdc	Alan Wu
PLC	25deg. C, 65%RH	48Vdc	Chris Lin
APCM	24deg. C, 64%RH	48Vdc	Antony Lee

### 3.3 Duty Cycle of Test Signal


**802.11b:** Duty cycle of test signal is 100 %, duty factor is not required.

Duty cycle of test signal is < 98%, duty factor shall be considered.

**802.11g:** Duty cycle =  $2.022/2.105 = 0.961$ , Duty factor =  $10 * \log( 1/0.961 ) = 0.17$

**802.11n (HT20):** Duty cycle =  $1.880/1.988 = 0.946$ , Duty factor =  $10 * \log( 1/0.946 ) = 0.24$

**802.11n (HT40):** Duty cycle =  $0.922/1.015 = 0.908$ , Duty factor =  $10 * \log( 1/0.908 ) = 0.42$

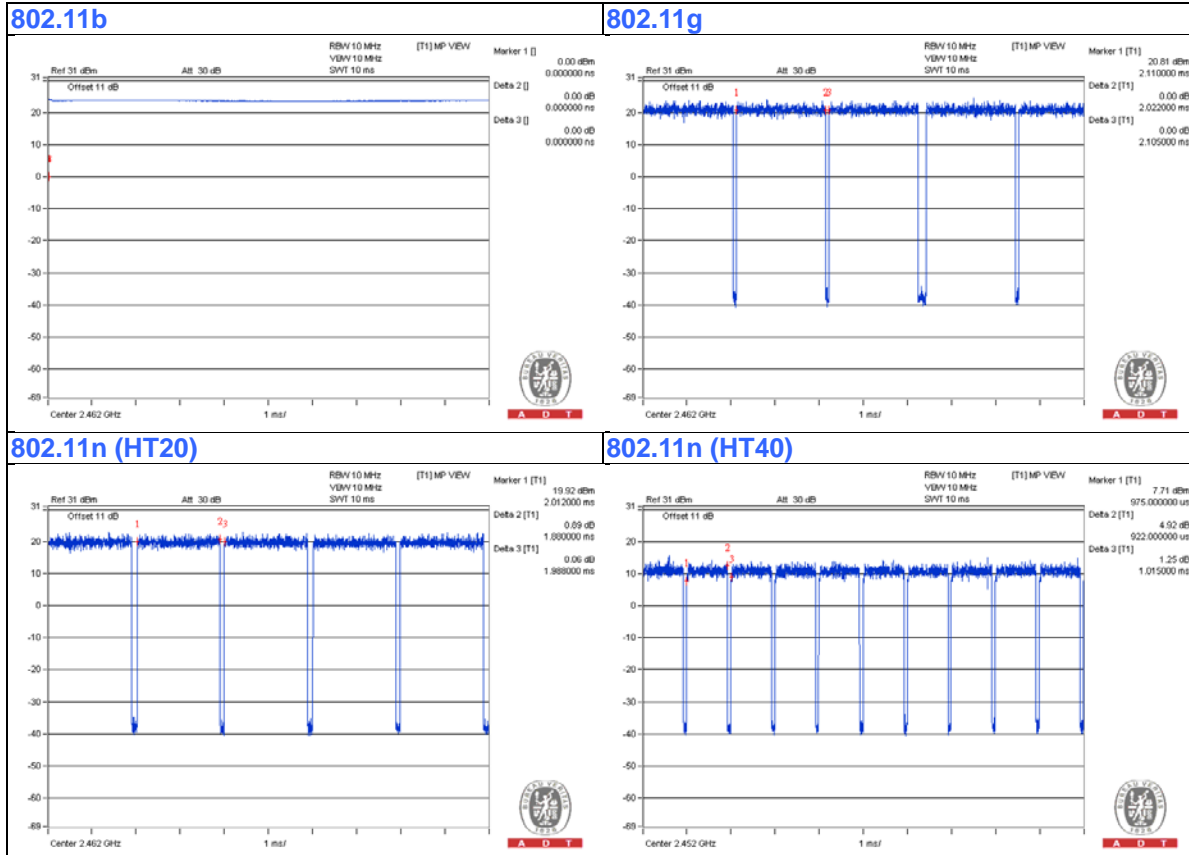

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	6RP2YM1	FCC DoC Approved	-
B.	Load	NA	NA	NA	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45 cable	1	3	N	0	-
2.	RJ45 cable	1	1.8	N	0	-
3.	RJ45 cable	1	1.8	N	0	Connected to load

#### 3.4.1 Configuration of System under Test

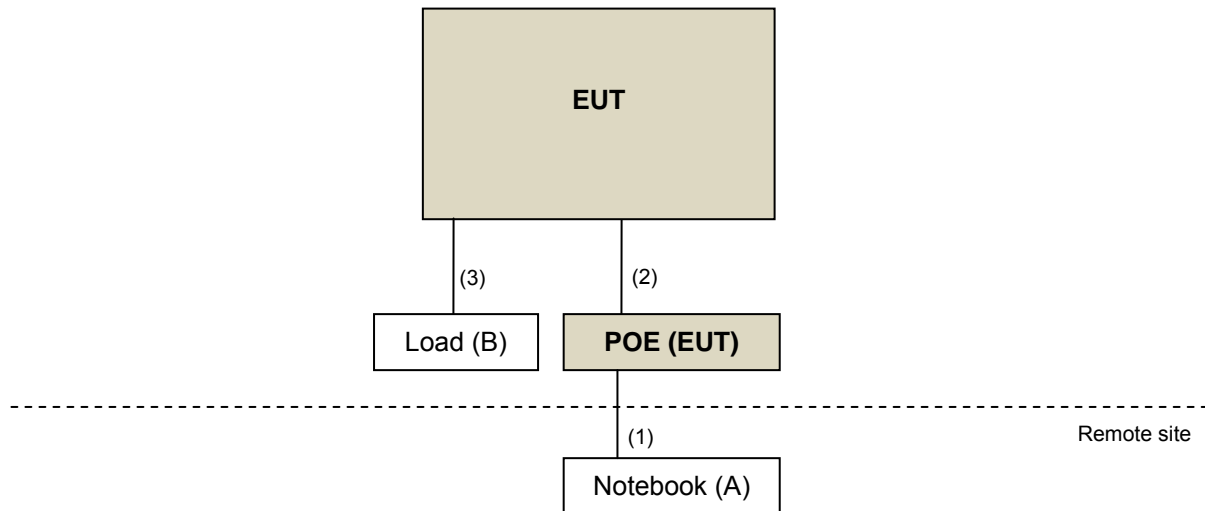

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**558074 D01 DTS Meas Guidance v03r03**

**662911 D01 Multiple Transmitter Output v02r01**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 30dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 06, 2014	Oct. 05, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Aug. 29, 2014	Aug. 28, 2015
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 06, 2015	Feb. 05, 2016
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Feb. 05, 2015	Feb. 04, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 09, 2015	Feb. 08, 2016
Loop Antenna R&S	HFH2-Z2	100070	Mar. 06, 2014	Mar. 05, 2016
Preamplifier Agilent	8449B	3008A01960	Aug. 09, 2014	Aug. 08, 2015
Preamplifier Agilent	8447D	2944A10631	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 09, 2014	Aug. 08, 2015
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100.	SC93021703	NA	NA
High Speed Peak Power Meter	ML2495A	0824011	Jul. 26, 2014	Jul. 25, 2015
Power Sensor	MA2411B	0738171	Jul. 26, 2014	Jul. 25, 2015

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. The test was performed in HwaYa Chamber 4.
  4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  5. The FCC Site Registration No. is 460141.
  6. The IC Site Registration No. is IC7450F-4.

#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


#### 4.1.4 Deviation from Test Standard

No deviation.




#### 4.1.5 Test Set Up


<Frequency Range below 30MHz>

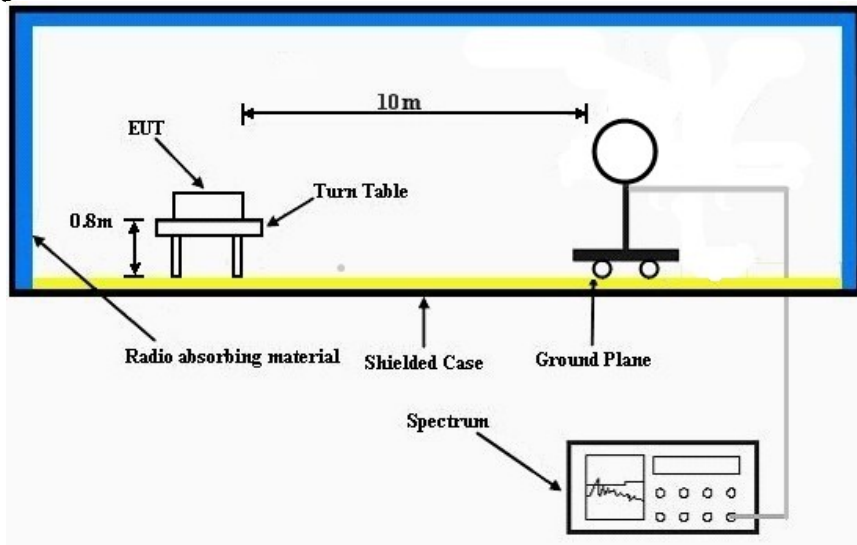

<Frequency Range below 1GHz>

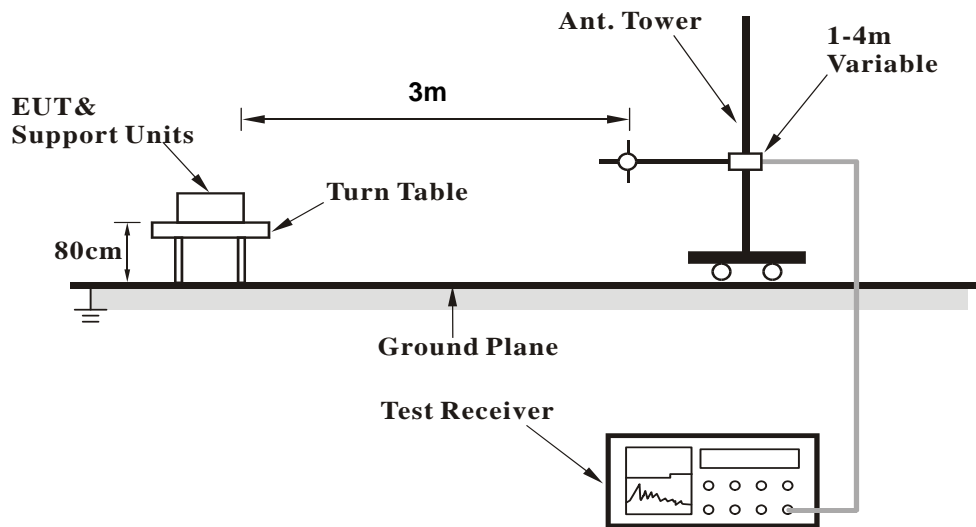

<Frequency Range above 1GHz>

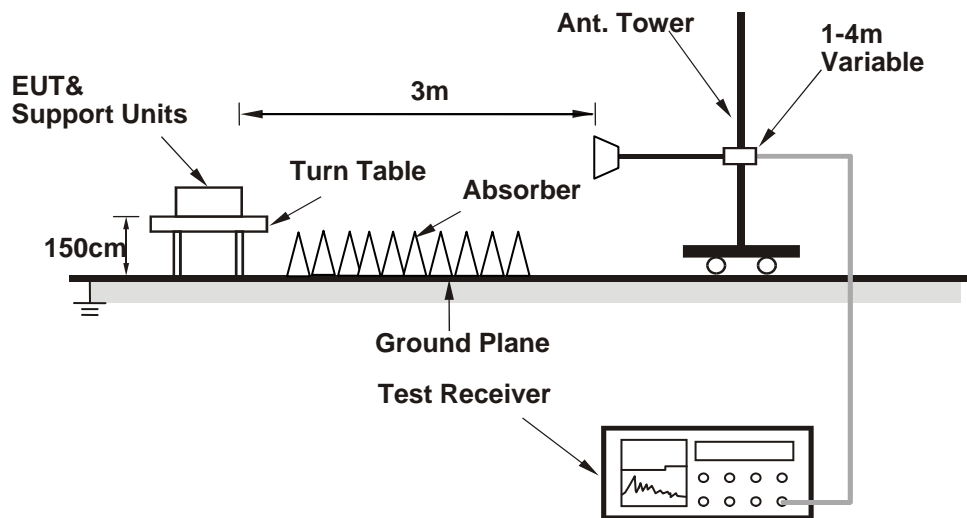

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Prepared notebook to act as a communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".

#### 4.1.7 Test Results

#### Above 1GHz Data :

#### 802.11b

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.1 PK	74.0	-12.9	1.31 H	177	29.00	32.10
2	2390.00	52.8 AV	54.0	-1.2	1.31 H	177	20.70	32.10
3	*2412.00	120.4 PK			1.02 H	182	88.20	32.20
4	*2412.00	116.6 AV			1.02 H	182	84.40	32.20
5	4824.00	49.4 PK	74.0	-24.6	2.37 H	230	44.20	5.20
6	4824.00	41.8 AV	54.0	-12.2	2.37 H	230	36.60	5.20

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.0 PK	74.0	-18.0	1.10 V	54	23.90	32.10
2	2390.00	45.8 AV	54.0	-8.2	1.10 V	54	13.70	32.10
3	*2412.00	109.5 PK			1.00 V	91	77.30	32.20
4	*2412.00	106.7 AV			1.00 V	91	74.50	32.20
5	4824.00	48.8 PK	74.0	-25.2	1.19 V	74	43.60	5.20
6	4824.00	37.1 AV	54.0	-16.9	1.19 V	74	31.90	5.20

#### REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* " : Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	124.7 PK			1.02 H	189	92.50	32.20
2	*2437.00	121.0 AV			1.02 H	189	88.80	32.20
3	2483.50	60.3 PK	74.0	-13.7	1.02 H	193	28.00	32.30
4	2483.50	52.4 AV	54.0	-1.6	1.02 H	193	20.10	32.30
5	4874.00	52.6 PK	74.0	-21.4	1.00 H	322	47.40	5.20
6	4874.00	47.9 AV	54.0	-6.1	1.00 H	322	42.70	5.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.8 PK			1.00 V	76	79.60	32.20
2	*2437.00	108.4 AV			1.00 V	76	76.20	32.20
3	2483.50	57.2 PK	74.0	-16.8	1.00 V	73	24.90	32.30
4	2483.50	44.6 AV	54.0	-9.4	1.00 V	73	12.30	32.30
5	4874.00	49.4 PK	74.0	-24.6	1.00 V	266	44.20	5.20
6	4874.00	41.0 AV	54.0	-13.0	1.00 V	266	35.80	5.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	120.6 PK			1.00 H	184	88.30	32.30
2	*2462.00	116.9 AV			1.00 H	184	84.60	32.30
3	2483.50	63.6 PK	74.0	-10.4	1.13 H	187	31.30	32.30
4	2483.50	52.9 AV	54.0	-1.1	1.13 H	187	20.60	32.30
5	4924.00	51.1 PK	74.0	-22.9	2.14 H	319	45.80	5.30
6	4924.00	44.4 AV	54.0	-9.6	2.14 H	319	39.10	5.30

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.5 PK			1.00 V	282	78.20	32.30
2	*2462.00	106.9 AV			1.00 V	282	74.60	32.30
3	2483.50	61.5 PK	74.0	-12.5	1.00 V	285	29.20	32.30
4	2483.50	46.8 AV	54.0	-7.2	1.00 V	285	14.50	32.30
5	4924.00	49.0 PK	74.0	-25.0	1.00 V	265	43.70	5.30
6	4924.00	39.5 AV	54.0	-14.5	1.00 V	265	34.20	5.30

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11g**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.1 PK	74.0	-3.9	1.04 H	175	38.00	32.10
2	2390.00	52.7 AV	54.0	-1.3	1.04 H	175	20.60	32.10
3	*2412.00	118.9 PK			1.03 H	188	86.70	32.20
4	*2412.00	109.0 AV			1.03 H	188	76.80	32.20
5	4824.00	48.3 PK	74.0	-25.7	1.00 H	320	43.10	5.20
6	4824.00	35.4 AV	54.0	-18.6	1.00 H	320	30.20	5.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.9 PK	74.0	-14.1	1.00 V	80	27.80	32.10
2	2390.00	45.0 AV	54.0	-9.0	1.00 V	80	12.90	32.10
3	*2412.00	108.9 PK			1.00 V	87	76.70	32.20
4	*2412.00	99.4 AV			1.00 V	87	67.20	32.20
5	4824.00	47.6 PK	74.0	-26.4	1.00 V	269	42.40	5.20
6	4824.00	34.6 AV	54.0	-19.4	1.00 V	269	29.40	5.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	125.5 PK			1.00 H	187	93.30	32.20
2	*2437.00	114.9 AV			1.00 H	187	82.70	32.20
3	2483.50	69.8 PK	74.0	-4.2	1.00 H	198	37.50	32.30
<b>4</b>	<b>2483.50</b>	<b>53.0 AV</b>	<b>54.0</b>	<b>-1.0</b>	<b>1.00 H</b>	<b>198</b>	<b>20.70</b>	<b>32.30</b>
5	4874.00	49.9 PK	74.0	-24.1	1.00 H	325	44.70	5.20
6	4874.00	36.7 AV	54.0	-17.3	1.00 H	325	31.50	5.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.9 PK			1.00 V	86	81.70	32.20
2	*2437.00	102.8 AV			1.00 V	86	70.60	32.20
3	2483.50	60.1 PK	74.0	-13.9	1.00 V	88	27.80	32.30
4	2483.50	45.8 AV	54.0	-8.2	1.00 V	88	13.50	32.30
5	4874.00	49.2 PK	74.0	-24.8	1.00 V	268	44.00	5.20
6	4874.00	36.0 AV	54.0	-18.0	1.00 V	268	30.80	5.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	119.6 PK			1.00 H	180	87.30	32.30
2	*2462.00	109.7 AV			1.00 H	180	77.40	32.30
3	2483.50	67.1 PK	74.0	-6.9	1.00 H	194	34.80	32.30
4	2483.50	52.8 AV	54.0	-1.2	1.00 H	194	20.50	32.30
5	4924.00	48.9 PK	74.0	-25.1	1.00 H	327	43.60	5.30
6	4924.00	36.1 AV	54.0	-17.9	1.00 H	327	30.80	5.30

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.8 PK			1.00 V	99	76.50	32.30
2	*2462.00	98.7 AV			1.00 V	99	66.40	32.30
3	2483.50	58.2 PK	74.0	-15.8	1.00 V	97	25.90	32.30
4	2483.50	44.4 AV	54.0	-9.6	1.00 V	97	12.10	32.30
5	4924.00	48.1 PK	74.0	-25.9	1.00 V	262	42.80	5.30
6	4924.00	35.5 AV	54.0	-18.5	1.00 V	262	30.20	5.30

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



**802.11n (HT20)**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	2390.00	70.2 PK	74.0	-3.8	2.52 H	196	38.10	32.10
2	<b>2390.00</b>	<b>53.0 AV</b>	<b>54.0</b>	<b>-1.0</b>	<b>2.52 H</b>	<b>196</b>	<b>20.90</b>	<b>32.10</b>
3	*2412.00	117.9 PK			2.56 H	184	85.70	32.20
4	*2412.00	108.0 AV			2.56 H	184	75.80	32.20
5	4824.00	47.6 PK	74.0	-26.4	1.00 H	321	42.40	5.20
6	4824.00	34.8 AV	54.0	-19.2	1.00 H	321	29.60	5.20

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	2390.00	58.1 PK	74.0	-15.9	2.58 V	278	26.00	32.10
2	2390.00	44.6 AV	54.0	-9.4	2.58 V	278	12.50	32.10
3	*2412.00	107.9 PK			2.58 V	278	75.70	32.20
4	*2412.00	98.2 AV			2.58 V	278	66.00	32.20
5	4824.00	47.2 PK	74.0	-26.8	1.00 V	268	42.00	5.20
6	4824.00	34.0 AV	54.0	-20.0	1.00 V	268	28.80	5.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	123.9 PK			1.01 H	191	91.70	32.20
2	*2437.00	114.1 AV			1.01 H	191	81.90	32.20
3	2483.50	67.3 PK	74.0	-6.7	1.02 H	189	35.00	32.30
4	2483.50	52.4 AV	54.0	-1.6	1.02 H	189	20.10	32.30
5	4874.00	49.8 PK	74.0	-24.2	1.00 H	323	44.60	5.20
6	4874.00	36.5 AV	54.0	-17.5	1.00 H	323	31.30	5.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	114.7 PK			1.00 V	89	82.50	32.20
2	*2437.00	103.5 AV			1.00 V	89	71.30	32.20
3	2483.50	57.8 PK	74.0	-16.2	1.00 V	86	25.50	32.30
4	2483.50	45.6 AV	54.0	-8.4	1.00 V	86	13.30	32.30
5	4874.00	49.1 PK	74.0	-24.9	1.00 V	266	43.90	5.20
6	4874.00	35.8 AV	54.0	-18.2	1.00 V	266	30.60	5.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.4 PK			1.00 H	178	86.10	32.30
2	*2462.00	108.6 AV			1.00 H	178	76.30	32.30
3	2483.50	67.2 PK	74.0	-6.8	1.00 H	180	34.90	32.30
4	2483.50	52.9 AV	54.0	-1.1	1.00 H	180	20.60	32.30
5	4924.00	48.7 PK	74.0	-25.3	1.00 H	330	43.40	5.30
6	4924.00	35.9 AV	54.0	-18.1	1.00 H	330	30.60	5.30

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.5 PK			1.00 V	99	74.20	32.30
2	*2462.00	96.5 AV			1.00 V	99	64.20	32.30
3	2483.50	58.9 PK	74.0	-15.1	1.00 V	91	26.60	32.30
4	2483.50	45.0 AV	54.0	-9.0	1.00 V	91	12.70	32.30
5	4924.00	47.7 PK	74.0	-26.3	1.00 V	260	42.40	5.30
6	4924.00	35.1 AV	54.0	-18.9	1.00 V	260	29.80	5.30

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11n (HT40)

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	2.53 H	193	35.10	32.10
2	2390.00	52.9 AV	54.0	-1.1	2.53 H	193	20.80	32.10
3	*2422.00	110.7 PK			2.52 H	201	78.50	32.20
4	*2422.00	101.0 AV			2.52 H	201	68.80	32.20
5	4844.00	47.2 PK	74.0	-26.8	1.00 H	326	42.00	5.20
6	4844.00	34.6 AV	54.0	-19.4	1.00 H	326	29.40	5.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.00 V	76	24.80	32.10
2	2390.00	44.9 AV	54.0	-9.1	1.00 V	76	12.80	32.10
3	*2422.00	98.7 PK			1.00 V	76	66.50	32.20
4	*2422.00	89.4 AV			1.00 V	76	57.20	32.20
5	4844.00	46.5 PK	74.0	-27.5	1.00 V	266	41.30	5.20
6	4844.00	33.6 AV	54.0	-20.4	1.00 V	266	28.40	5.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	119.0 PK			2.25 H	198	86.80	32.20
2	*2437.00	108.8 AV			2.25 H	198	76.60	32.20
3	2483.50	66.5 PK	74.0	-7.5	2.20 H	199	34.20	32.30
<b>4</b>	<b>2483.50</b>	<b>53.0 AV</b>	<b>54.0</b>	<b>-1.0</b>	<b>2.20 H</b>	<b>199</b>	<b>20.70</b>	<b>32.30</b>
5	4874.00	49.4 PK	74.0	-24.6	1.00 H	324	44.20	5.20
6	4874.00	36.2 AV	54.0	-17.8	1.00 H	324	31.00	5.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.7 PK			1.00 V	87	75.50	32.20
2	*2437.00	98.4 AV			1.00 V	87	66.20	32.20
3	2483.50	59.5 PK	74.0	-14.5	1.00 V	83	27.20	32.30
4	2483.50	45.2 AV	54.0	-8.8	1.00 V	83	12.90	32.30
5	4874.00	48.4 PK	74.0	-25.6	1.00 V	263	43.20	5.20
6	4874.00	35.2 AV	54.0	-18.8	1.00 V	263	30.00	5.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	110.4 PK			2.47 H	196	78.20	32.20
2	*2452.00	100.4 AV			2.47 H	196	68.20	32.20
3	2483.50	67.1 PK	74.0	-6.9	2.43 H	200	34.80	32.30
4	2483.50	52.8 AV	54.0	-1.2	2.43 H	200	20.50	32.30
5	4904.00	48.0 PK	74.0	-26.0	1.00 H	325	42.80	5.20
6	4904.00	35.0 AV	54.0	-19.0	1.00 H	325	29.80	5.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.4 PK			1.00 V	92	67.20	32.20
2	*2452.00	89.3 AV			1.00 V	92	57.10	32.20
3	2483.50	59.1 PK	74.0	-14.9	1.00 V	92	26.80	32.30
4	2483.50	44.1 AV	54.0	-9.9	1.00 V	92	11.80	32.30
5	4904.00	47.3 PK	74.0	-26.7	1.00 V	267	42.10	5.20
6	4904.00	34.2 AV	54.0	-19.8	1.00 V	267	29.00	5.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**Below 1GHz Data: 802.11b**

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.89	34.0 QP	40.0	-6.0	1.50 H	226	49.10	-15.10
2	97.81	40.7 QP	43.5	-2.8	1.99 H	233	59.90	-19.20
3	245.28	42.3 QP	46.0	-3.7	1.00 H	223	56.90	-14.60
4	305.44	41.5 QP	46.0	-4.5	1.00 H	214	54.00	-12.50
5	379.17	41.8 QP	46.0	-4.2	1.00 H	214	52.90	-11.10
6	466.49	36.8 QP	46.0	-9.2	1.49 H	195	46.30	-9.50

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.89	37.6 QP	40.0	-2.4	1.00 V	289	52.70	-15.10
2	99.75	34.1 QP	43.5	-9.4	1.25 V	97	52.70	-18.60
3	150.20	34.2 QP	43.5	-9.3	1.25 V	159	48.00	-13.80
4	251.11	37.3 QP	46.0	-8.7	1.00 V	238	51.70	-14.40
5	317.08	36.6 QP	46.0	-9.4	1.50 V	209	48.60	-12.00
6	375.29	37.1 QP	46.0	-8.9	1.00 V	166	48.30	-11.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
- Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 11, 2014	Nov. 10, 2015
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 26, 2014	Dec. 25, 2015
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 26, 2015	Feb. 25, 2016
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 21, 2014	Jul. 20, 2015
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.



#### 4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

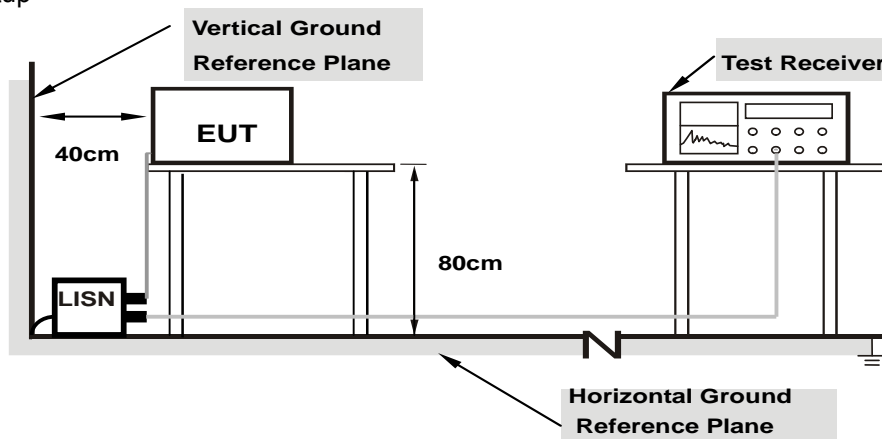

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.17328	0.11	39.37	31.79	39.48	31.90	64.80	54.80	-25.32
<b>2</b>	<b>0.52927</b>	<b>0.10</b>	<b>46.52</b>	<b>34.84</b>	<b>46.62</b>	<b>34.94</b>	<b>56.00</b>	<b>46.00</b>	<b>-9.38</b>	<b>-11.06</b>
3	1.01411	0.18	37.87	28.67	38.05	28.85	56.00	46.00	-17.95	-17.15
4	1.42257	0.20	36.02	25.96	36.22	26.16	56.00	46.00	-19.78	-19.84
5	3.95443	0.25	28.95	22.35	29.20	22.60	56.00	46.00	-26.80	-23.40
6	21.50642	1.00	25.10	18.18	26.10	19.18	60.00	50.00	-33.90	-30.82

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

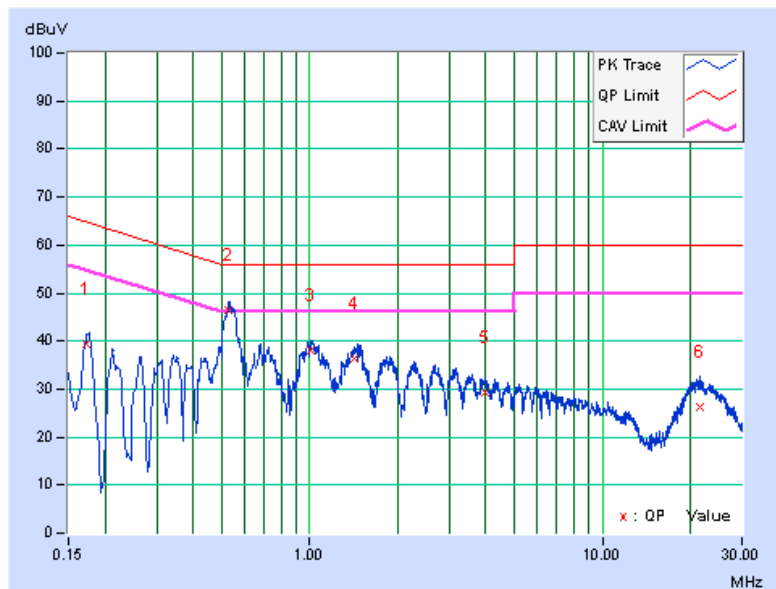


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16967	0.17	38.43	26.87	38.60	27.04	64.98	54.98	-26.38	-27.94
2	0.29662	0.21	33.56	24.88	33.77	25.09	60.34	50.34	-26.57	-25.25
3	0.53318	0.17	45.98	34.38	46.15	34.55	56.00	46.00	-9.85	-11.45
4	1.02193	0.18	36.37	27.60	36.55	27.78	56.00	46.00	-19.45	-18.22
5	1.44030	0.19	35.04	25.32	35.23	25.51	56.00	46.00	-20.77	-20.49
6	21.18580	0.88	22.82	14.87	23.70	15.75	60.00	50.00	-36.30	-34.25

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

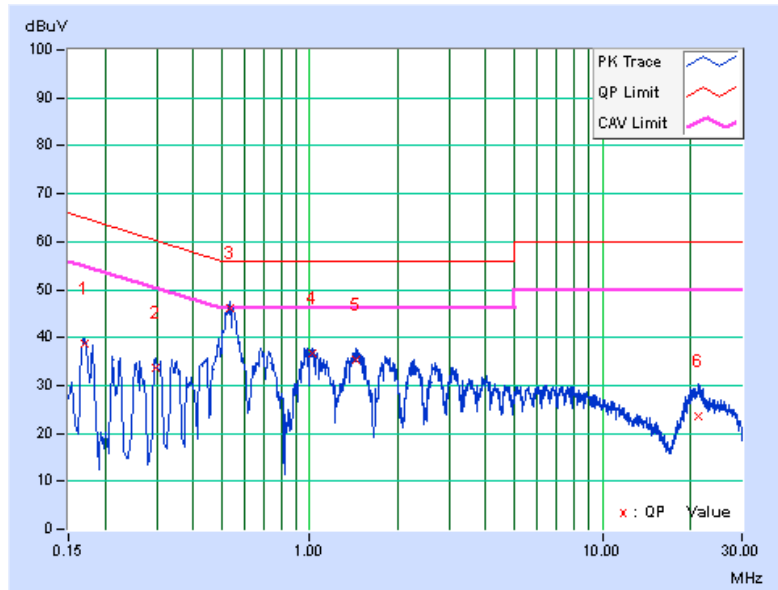


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	10.13	10.13	10.12	0.5	Pass
6	2437	10.12	10.11	10.11	0.5	Pass
11	2462	10.12	10.10	10.10	0.5	Pass

##### 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	16.37	15.80	16.09	0.5	Pass
6	2437	16.31	16.32	16.33	0.5	Pass
11	2462	16.36	16.36	16.36	0.5	Pass

##### 802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	17.21	16.96	16.90	0.5	Pass
6	2437	16.68	16.35	16.70	0.5	Pass
11	2462	17.55	17.56	17.57	0.5	Pass

##### 802.11n (HT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		CHAIN 0	CHAIN 1	CHAIN 2		
3	2422	35.29	35.80	35.55	0.5	Pass
6	2437	36.10	35.82	35.68	0.5	Pass
9	2452	35.38	35.80	35.26	0.5	Pass





A D T

### Spectrum Plot of Worst Value



#### 802.11b

#### 802.11g

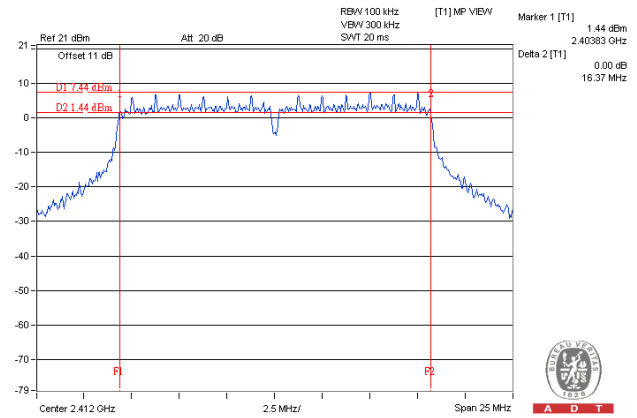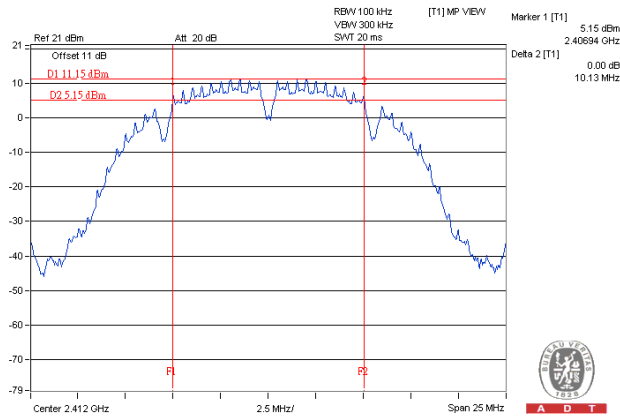

#### 802.11n (HT20)

#### 802.11n (HT40)

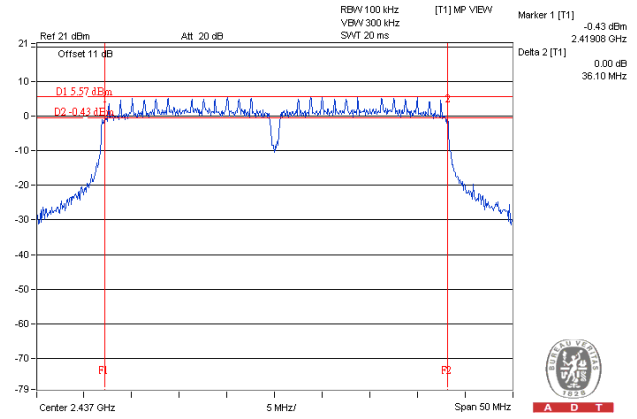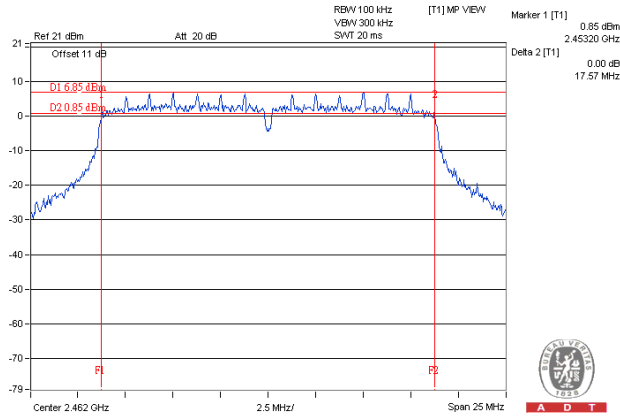

## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $NANT \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any NANT;

Array Gain =  $5 \log(NANT/NSS)$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $NANT \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(NANT/NSS)$  dB.

### 4.4.2 Test Setup



### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

#### 4.4.7 Test Results

##### 802.11b

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass/Fail
		Chain 0	Chain 1	Chain 2				
1	2412	21.43	21.38	21.41	414.756	26.18	30	Pass
6	2437	25.17	25.15	25.17	<b>985.045</b>	29.93	30	Pass
11	2462	22.55	22.43	22.31	525.088	27.20	30	Pass

##### 802.11g

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass/Fail
		Chain 0	Chain 1	Chain 2				
1	2412	18.58	18.92	18.68	223.884	23.50	30	Pass
6	2437	24.34	23.91	23.89	762.587	28.82	30	Pass
11	2462	19.64	19.65	19.39	271.198	24.33	30	Pass

##### 802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass/Fail
		Chain 0	Chain 1	Chain 2				
1	2412	17.49	17.56	17.48	169.097	22.28	30	Pass
6	2437	23.80	23.42	23.78	698.450	28.44	30	Pass
11	2462	18.64	18.55	18.50	215.523	23.33	30	Pass

##### 802.11n (HT40)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass/Fail
		Chain 0	Chain 1	Chain 2				
3	2422	12.48	12.64	12.57	54.138	17.34	30	Pass
6	2437	19.98	19.81	19.80	290.759	24.64	30	Pass
9	2452	12.71	12.76	12.77	56.467	17.52	30	Pass




## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

#### For AVG. power (duty cycle $\geq 98\%$ )

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

#### For AVG. power (duty cycle $< 98\%$ )

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to “free run”.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as Item 4.3.6

#### 4.5.7 Test Results

##### 802.11b

TX chain	Chan.	Freq. (MHz)	PSD (dBm)	10 log (N=3) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-9.04	4.77	-4.27	4.34	Pass
	6	2437	-4.76	4.77	0.01	4.34	Pass
	11	2462	-7.46	4.77	-2.69	4.34	Pass
1	1	2412	-8.01	4.77	-3.24	4.34	Pass
	6	2437	-4.78	4.77	-0.01	4.34	Pass
	11	2462	-7.37	4.77	-2.60	4.34	Pass
2	1	2412	-8.70	4.77	-3.93	4.34	Pass
	6	2437	-4.37	4.77	0.40	4.34	Pass
	11	2462	-7.99	4.77	-3.22	4.34	Pass

**NOTE:**

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $4.89\text{dBi} + 10\log(3) = 9.66\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8-(9.66-6) = 4.34\text{dBm}$ .

##### 802.11g

TX chain	Chan.	Freq. (MHz)	PSD (dBm)	10 log (N=3) dB	Total PSD w/o Duty Factor (dBm)	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-13.27	4.77	-8.50	0.17	-8.33	4.34	Pass
	6	2437	-8.18	4.77	-3.41	0.17	-3.24	4.34	Pass
	11	2462	-12.69	4.77	-7.92	0.17	-7.75	4.34	Pass
1	1	2412	-12.75	4.77	-7.98	0.17	-7.81	4.34	Pass
	6	2437	-8.20	4.77	-3.43	0.17	-3.26	4.34	Pass
	11	2462	-12.91	4.77	-8.14	0.17	-7.97	4.34	Pass
2	1	2412	-12.95	4.77	-8.18	0.17	-8.01	4.34	Pass
	6	2437	-7.73	4.77	-2.96	0.17	-2.79	4.34	Pass
	11	2462	-12.44	4.77	-7.67	0.17	-7.50	4.34	Pass

**NOTE:**

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $4.89\text{dBi} + 10\log(3) = 9.66\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8-(9.66-6) = 4.34\text{dBm}$ .
- Refer to section 3.3 for duty cycle spectrum plot.

**802.11n (HT20)**

TX chain	Chan.	Freq. (MHz)	PSD (dBm)	10 log (N=3) dB	Total PSD w/o Duty Factor (dBm)	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-15.37	4.77	-10.60	0.24	-10.36	4.34	Pass
	6	2437	-8.99	4.77	-4.22	0.24	-3.98	4.34	Pass
	11	2462	-14.31	4.77	-9.54	0.24	-9.30	4.34	Pass
1	1	2412	-15.08	4.77	-10.31	0.24	-10.07	4.34	Pass
	6	2437	-9.15	4.77	-4.38	0.24	-4.14	4.34	Pass
	11	2462	-13.93	4.77	-9.16	0.24	-8.92	4.34	Pass
2	1	2412	-14.93	4.77	-10.16	0.24	-9.92	4.34	Pass
	6	2437	-8.81	4.77	-4.04	0.24	-3.80	4.34	Pass
	11	2462	-13.95	4.77	-9.18	0.24	-8.94	4.34	Pass

**NOTE:**





- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = 4.89dBi + 10log(3) = 9.66dBi > 6dBi , so the power density limit shall be reduced to 8-(9.66-6) = 4.34dBm.
- Refer to section 3.3 for duty cycle spectrum plot.

**802.11n (HT40)**

TX chain	Chan.	Freq. (MHz)	PSD (dBm)	10 log (N=3) dB	Total PSD w/o Duty Factor (dBm)	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass /Fail
0	3	2422	-22.88	4.77	-18.11	0.42	-17.69	4.34	Pass
	6	2437	-15.64	4.77	-10.87	0.42	-10.45	4.34	Pass
	9	2452	-23.19	4.77	-18.42	0.42	-18.00	4.34	Pass
1	3	2422	-23.03	4.77	-18.26	0.42	-17.84	4.34	Pass
	6	2437	-15.82	4.77	-11.05	0.42	-10.63	4.34	Pass
	9	2452	-22.44	4.77	-17.67	0.42	-17.25	4.34	Pass
2	3	2422	-23.08	4.77	-18.31	0.42	-17.89	4.34	Pass
	6	2437	-16.28	4.77	-11.51	0.42	-11.09	4.34	Pass
	9	2452	-23.06	4.77	-18.29	0.42	-17.87	4.34	Pass

**NOTE:**

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = 4.89dBi + 10log(3) = 9.66dBi > 6dBi , so the power density limit shall be reduced to 8-(9.66-6) = 4.34dBm.
- Refer to section 3.3 for duty cycle spectrum plot.

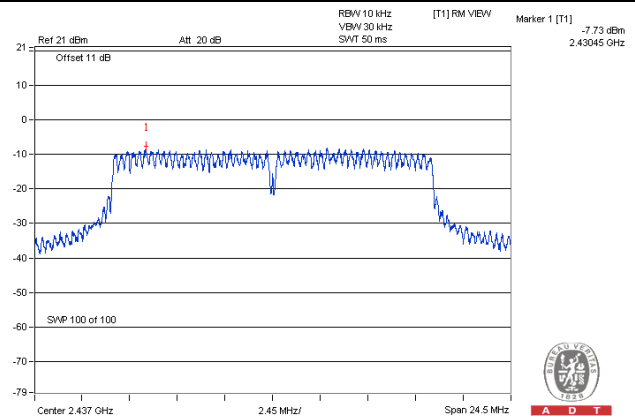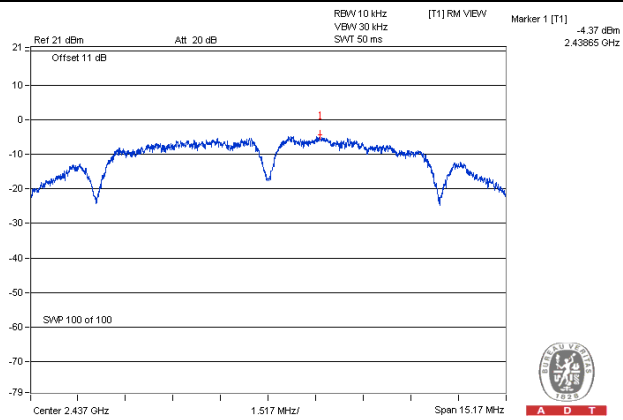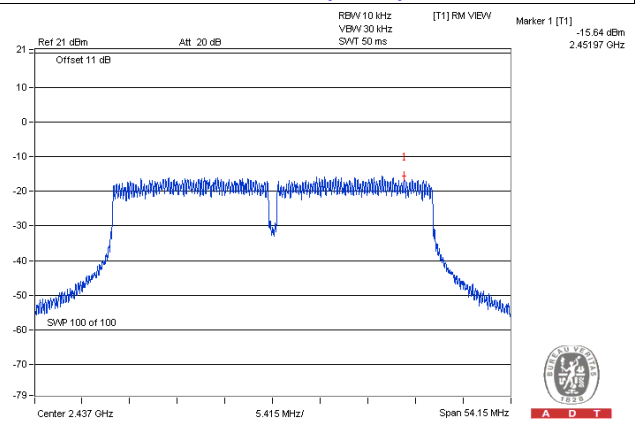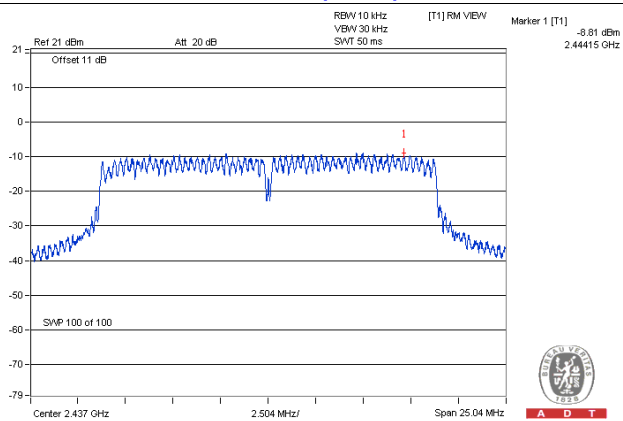
**Spectrum Plot of Worst Value****802.11b****802.11g****802.11n (HT20)****802.11n (HT40)**

## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition

Same as Item 4.3.6



### 4.6.7 Test Results

The conducted emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

### 802.11b CHAIN 0



#### CH 1

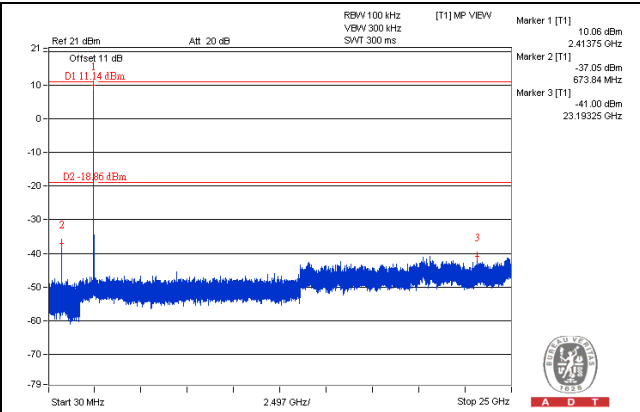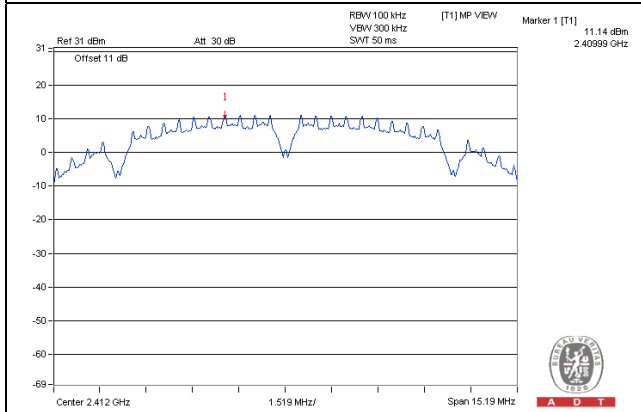


#### CH 6

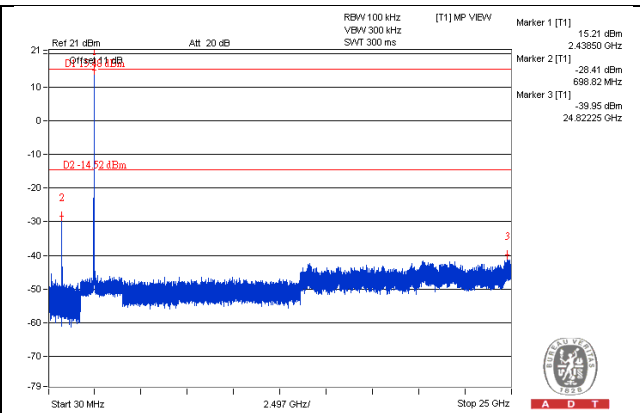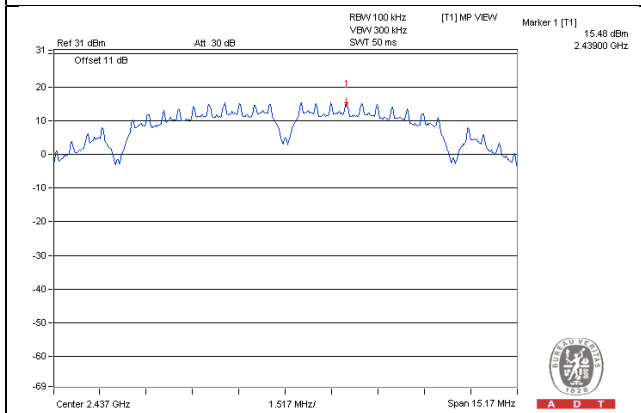


#### CH 11







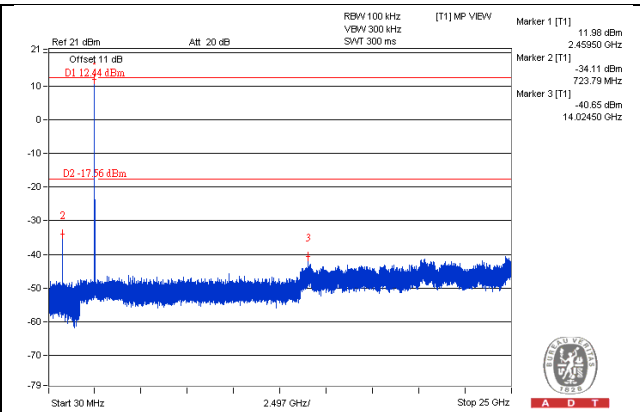
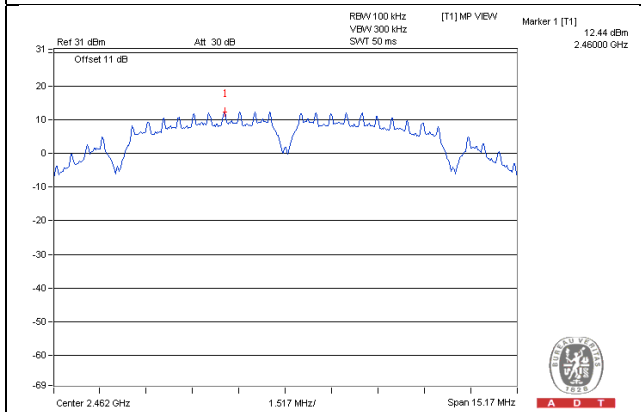


#### CH 1 Band edge

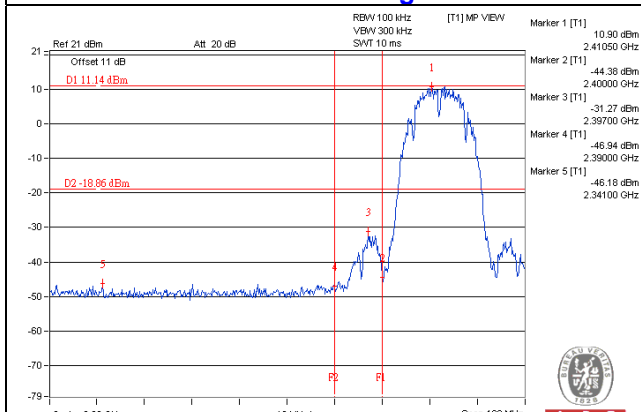



#### CH 11 Band edge

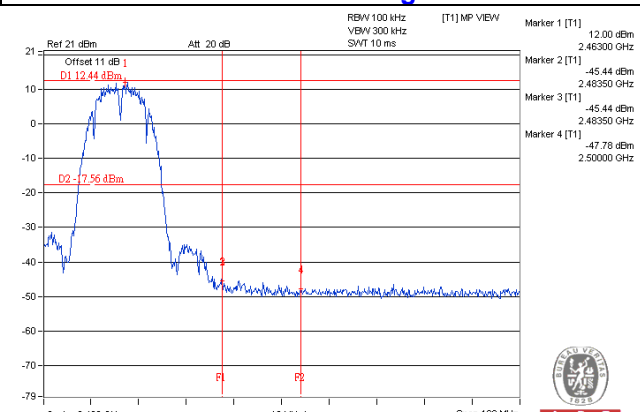

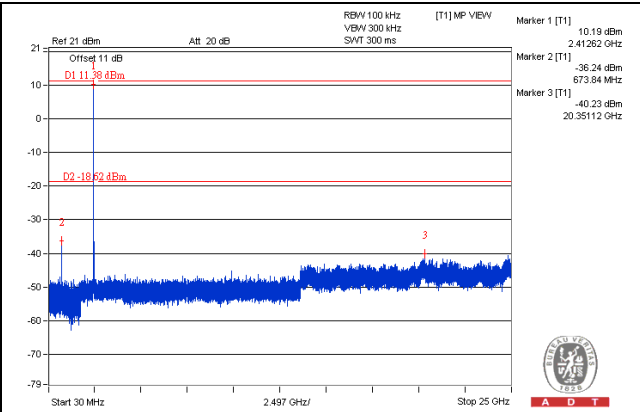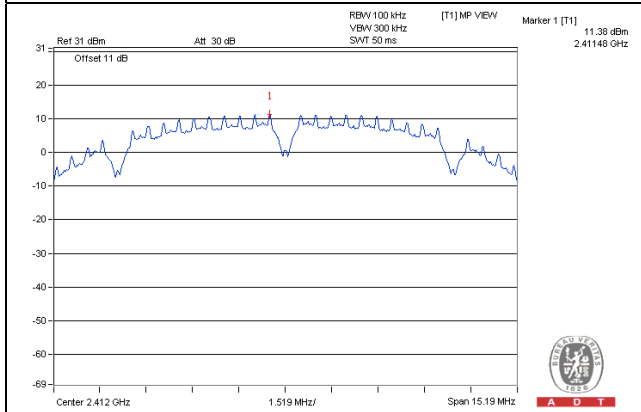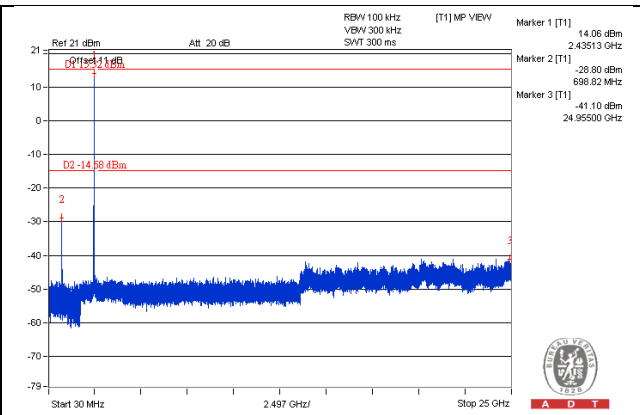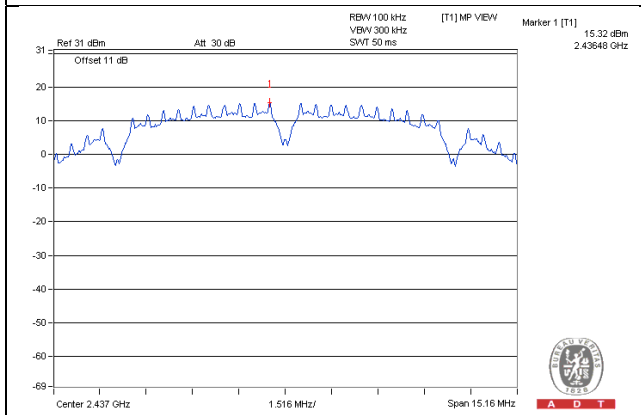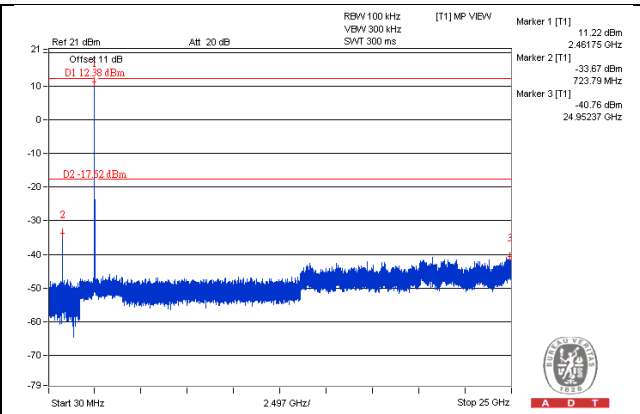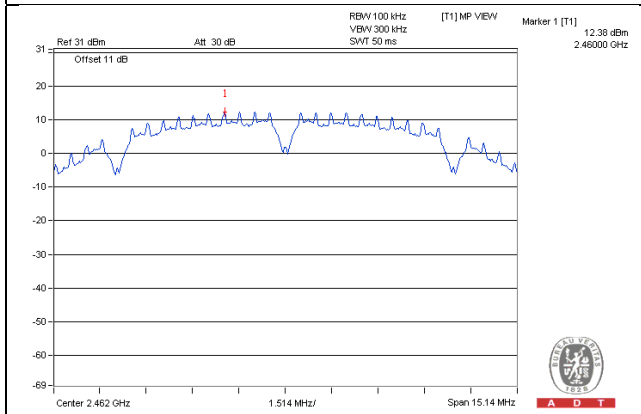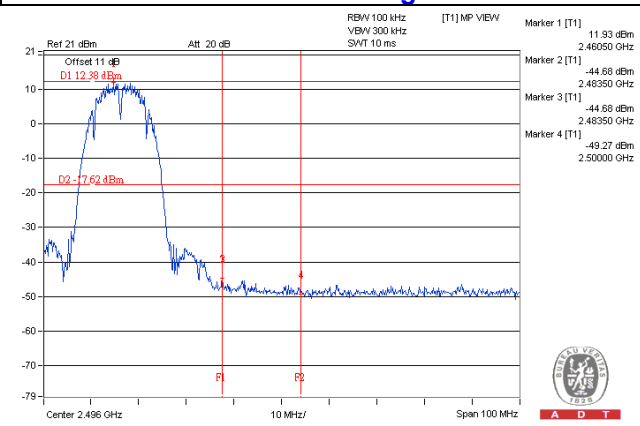
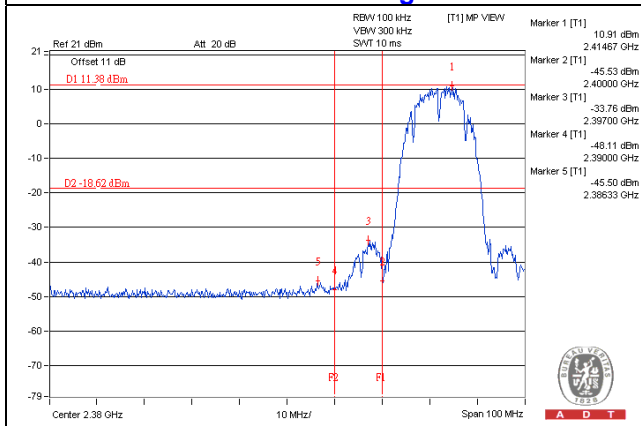
**CHAIN 1**
**CH 1**

**CH 6**

**CH 11**

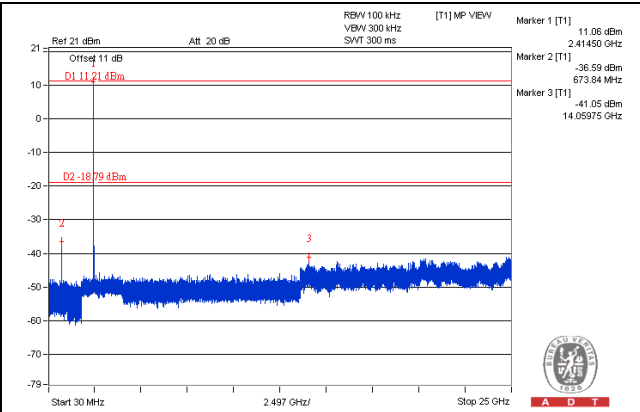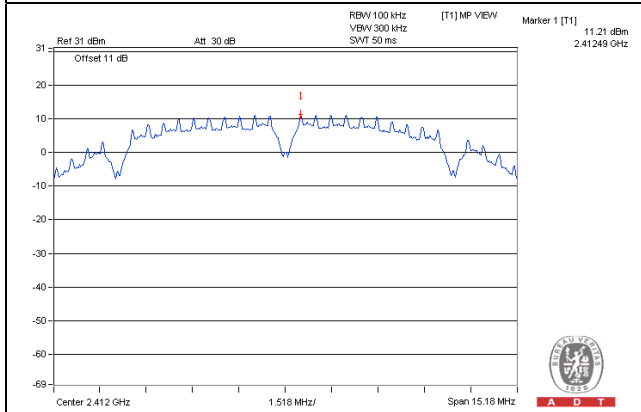**CH 1 Band edge**
**CH 11 Band edge**


CHAIN 2

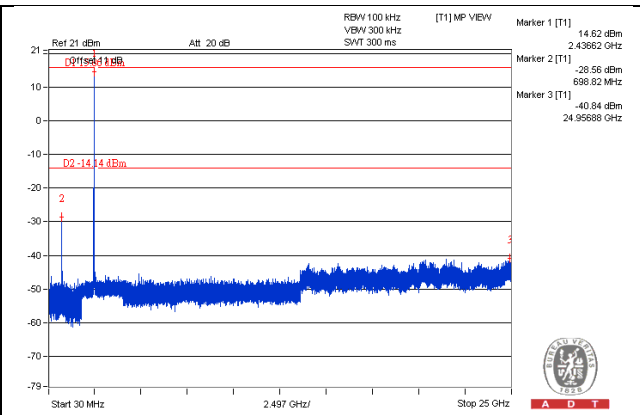
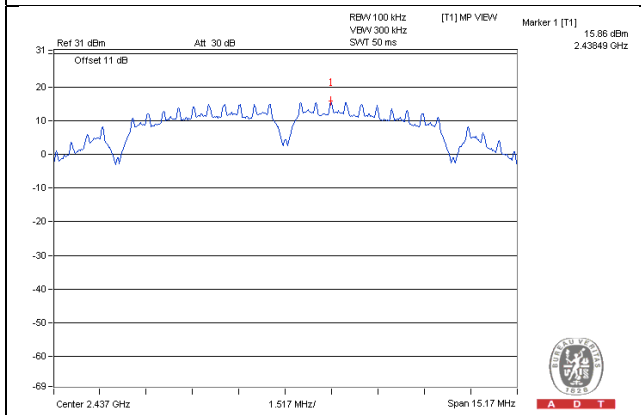
CH 1



CH 6





CH 11

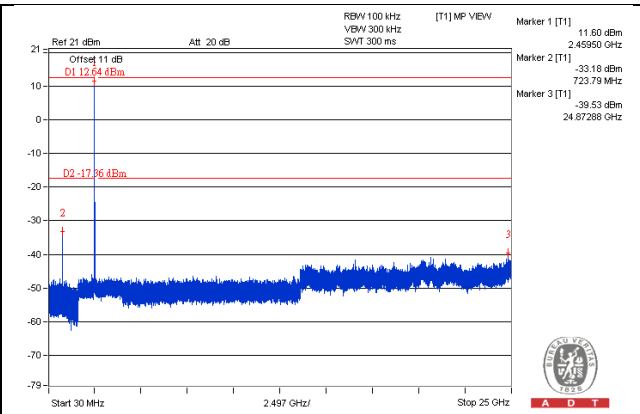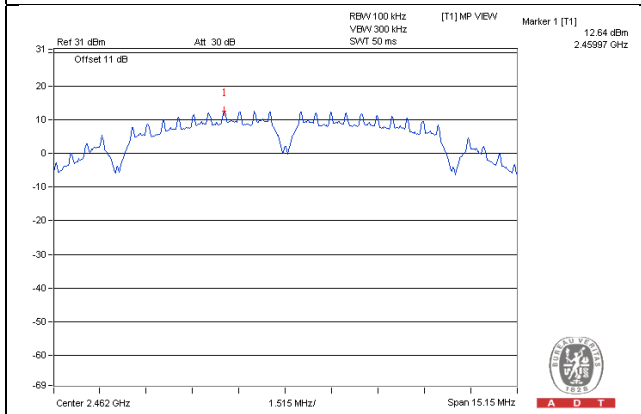

CH 1 Band edge



CH 11 Band edge

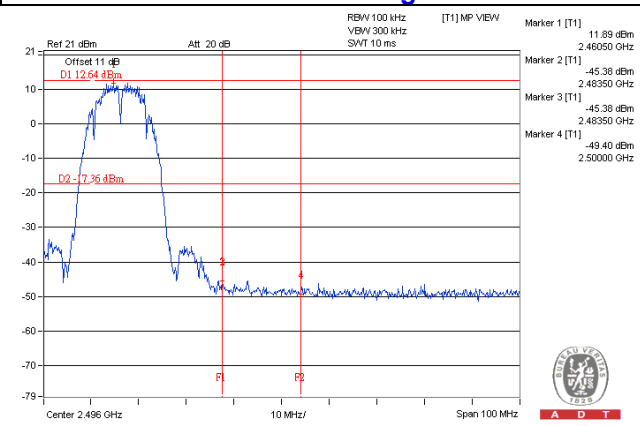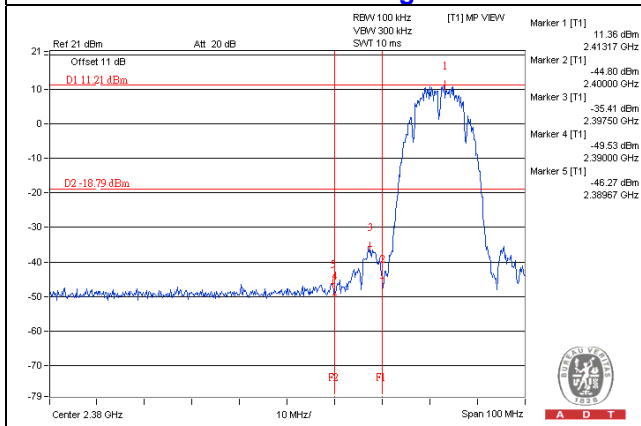





# 802.11g\_CHAIN 0



## CH 1

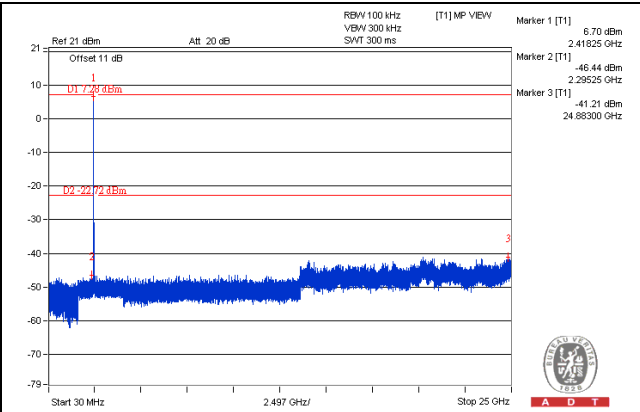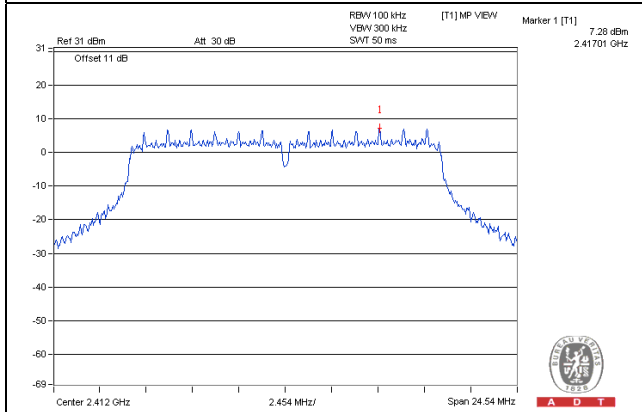


## CH 6

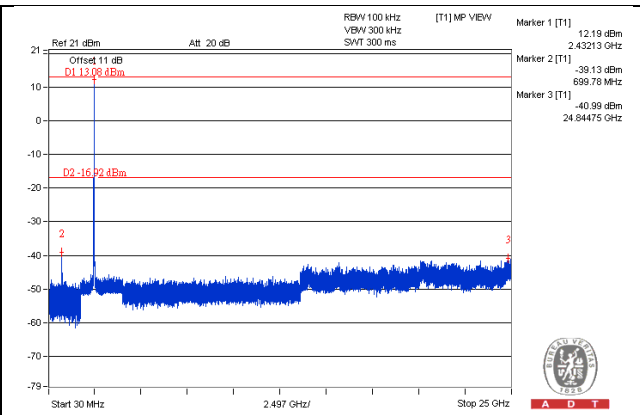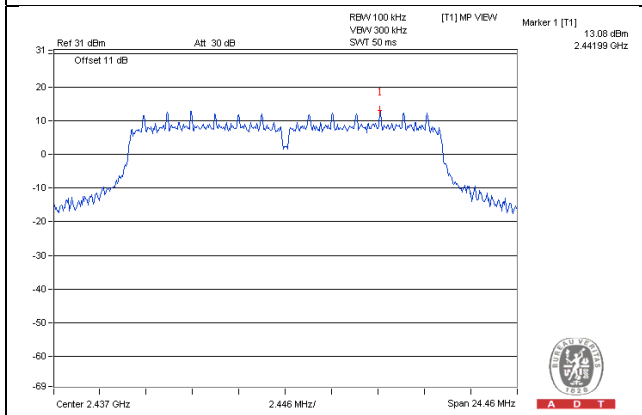


## CH 11







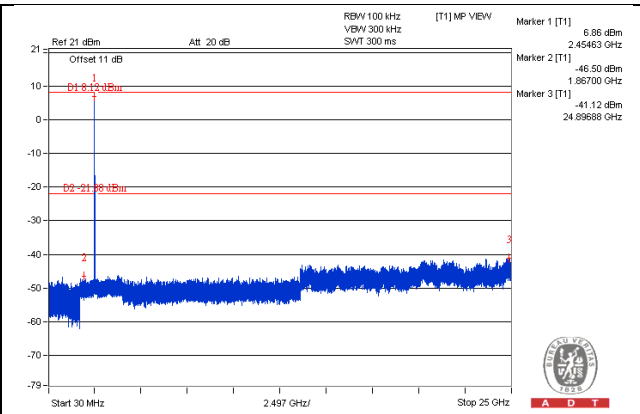
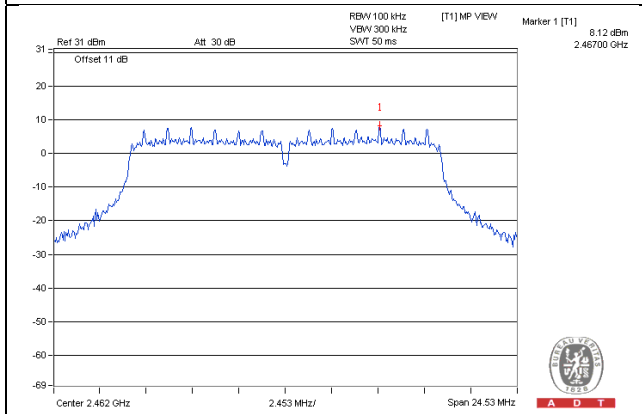


### CH 1 Band edge

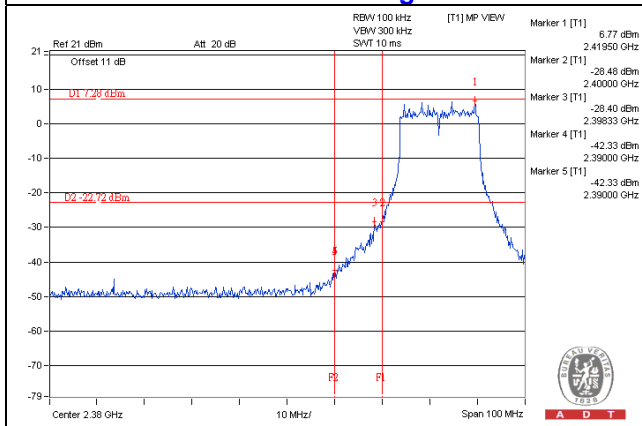



### CH 11 Band edge

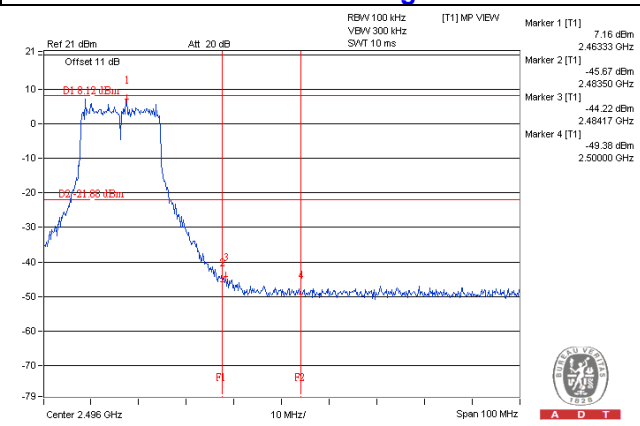

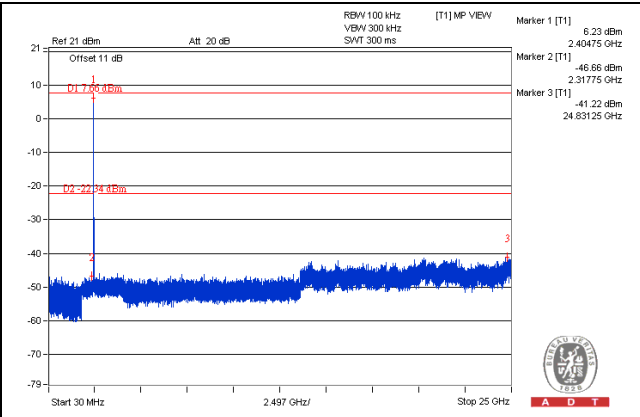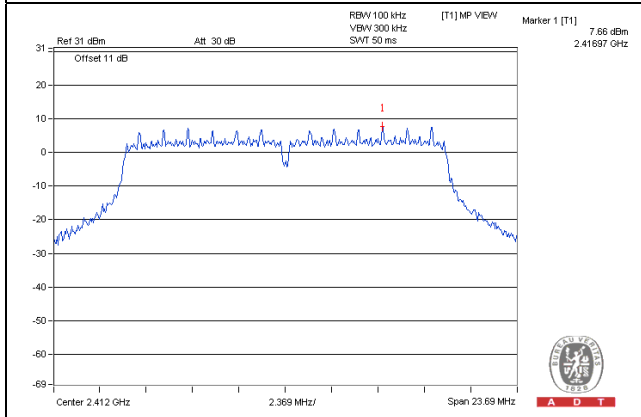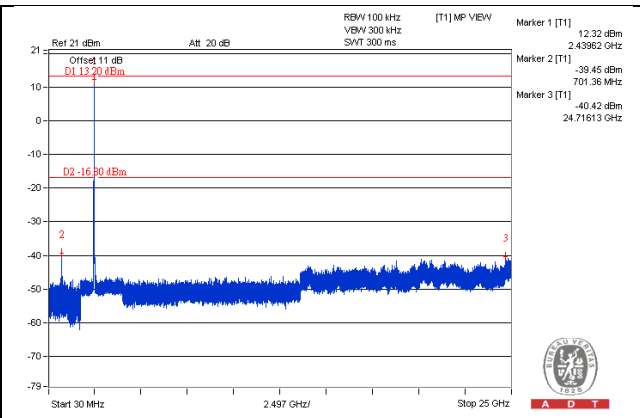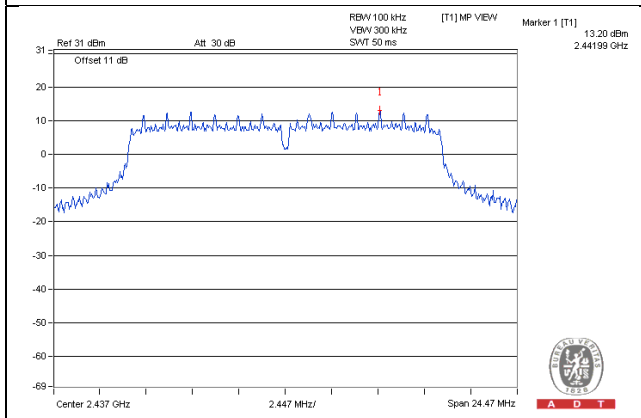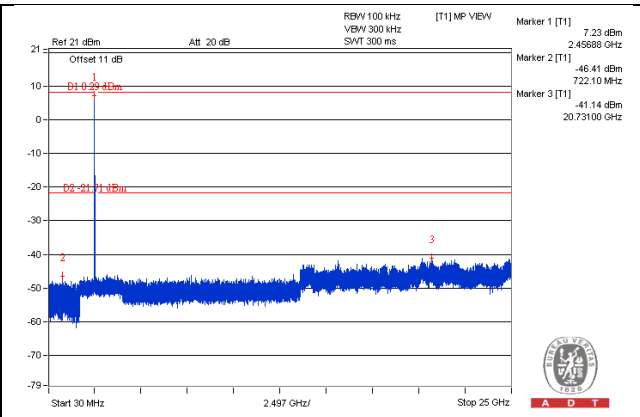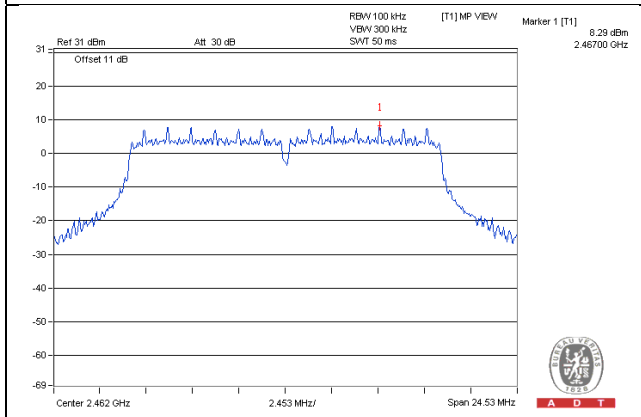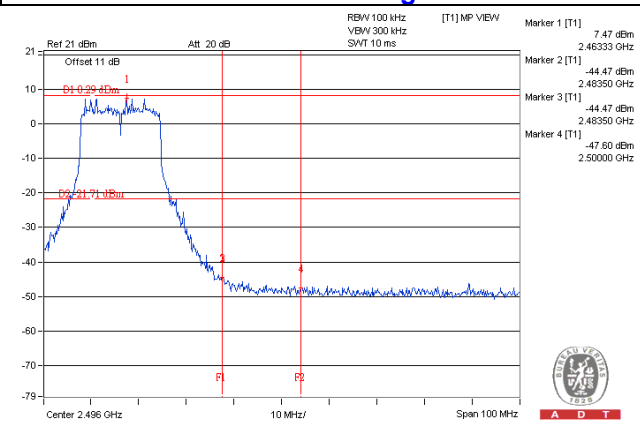
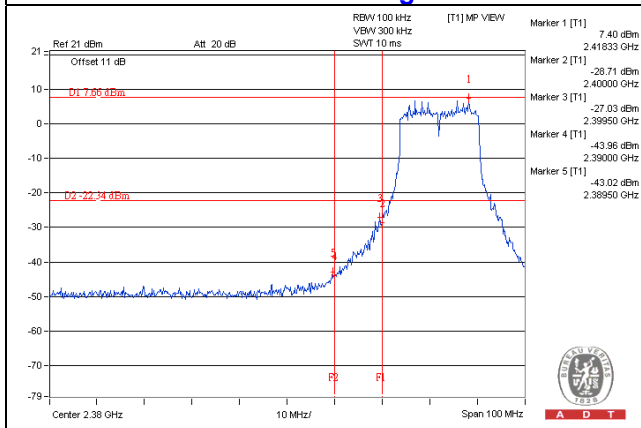
**CHAIN 1**
**CH 1**

**CH 6**

**CH 11**

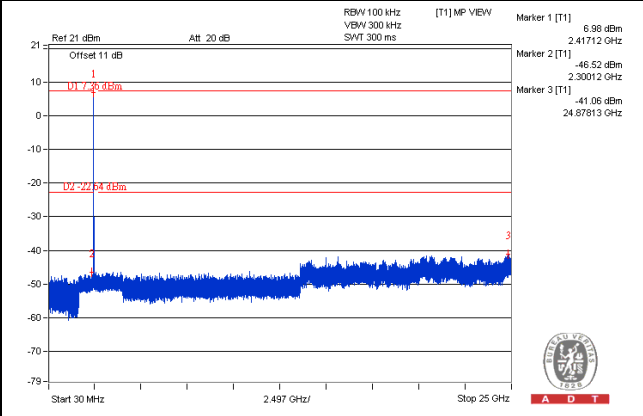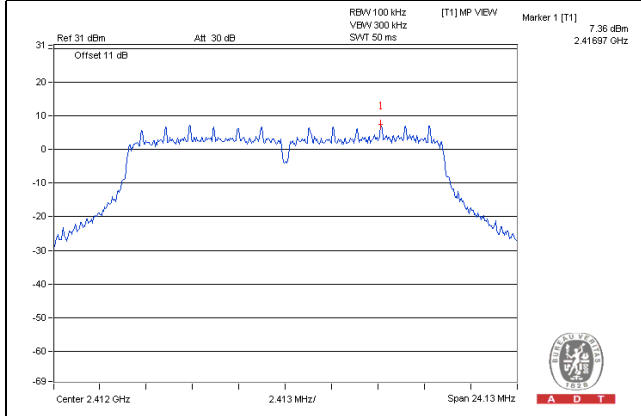**CH 1 Band edge**
**CH 11 Band edge**


CHAIN 2

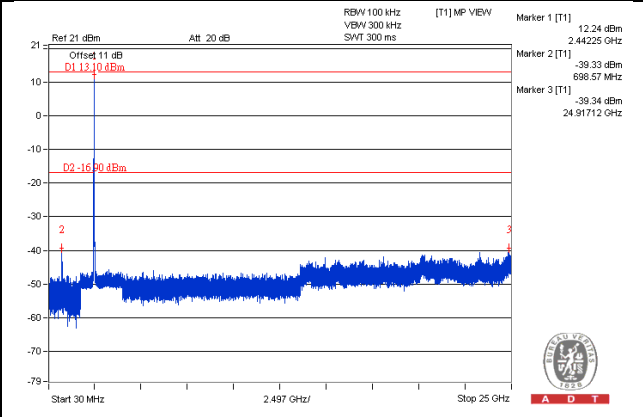
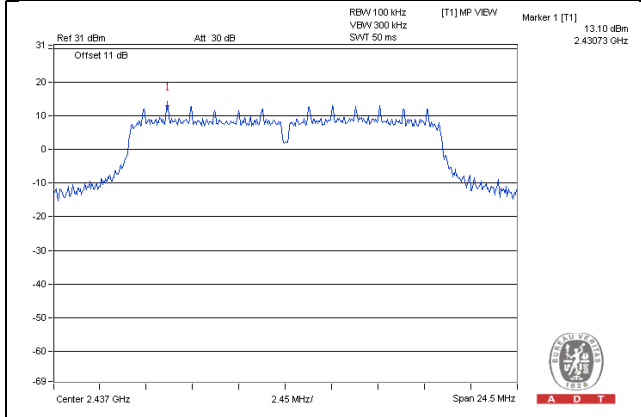
CH 1



CH 6





CH 11

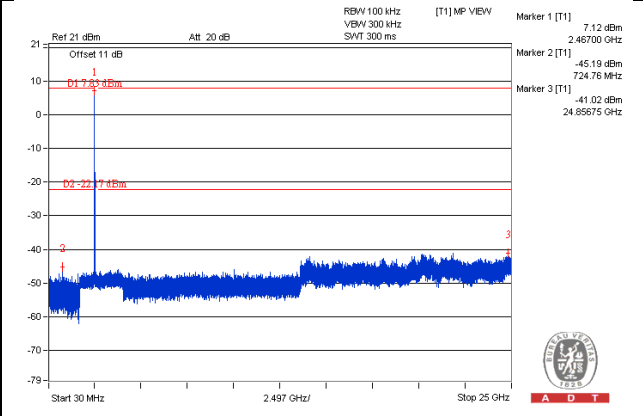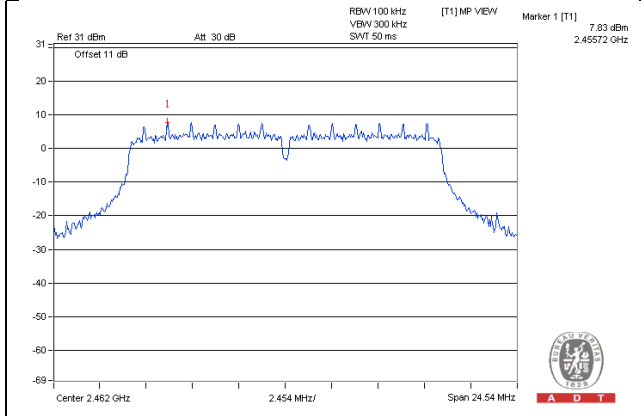



CH 1 Band edge

CH 11 Band edge

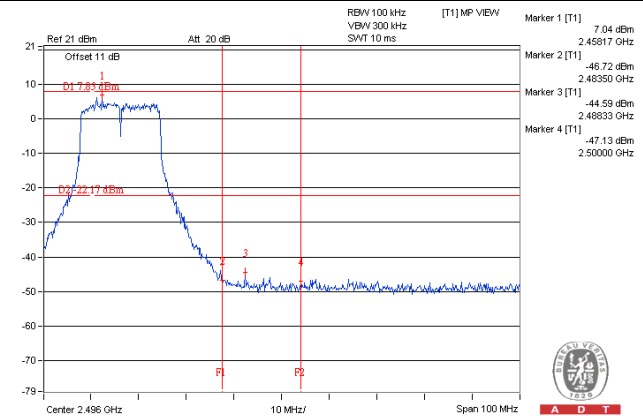
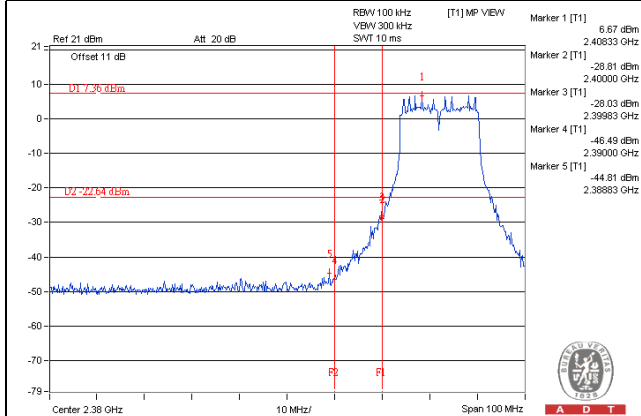


# 802.11n (HT20)\_CHAIN 0



## CH 1

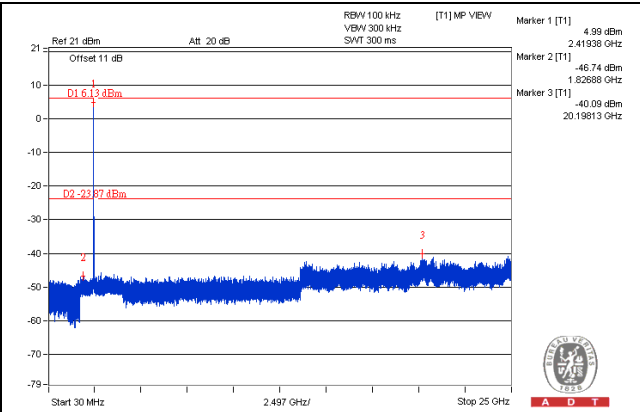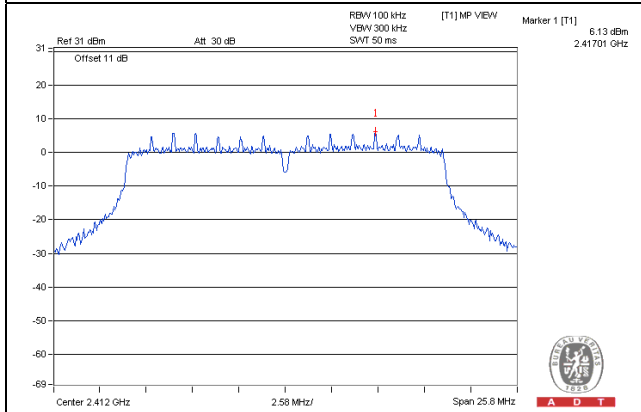


## CH 6

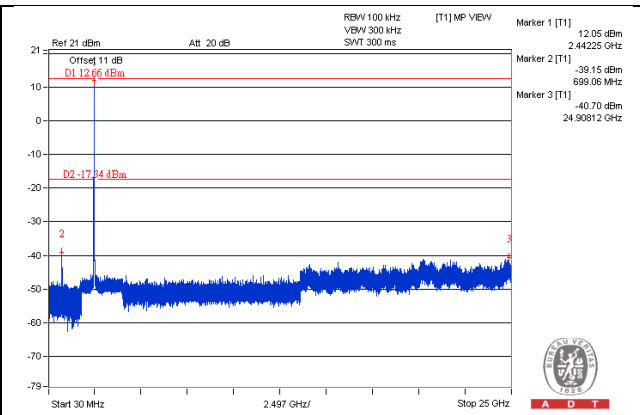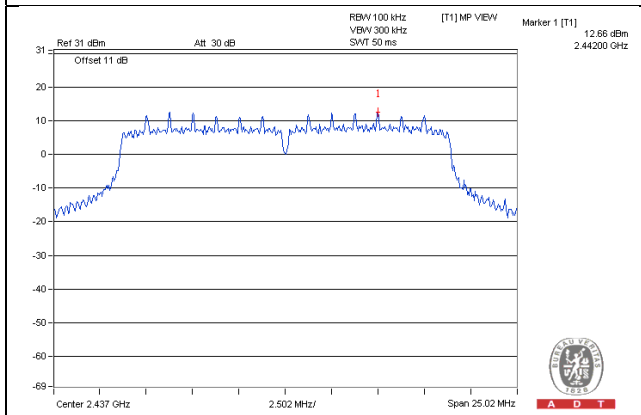


## CH 11

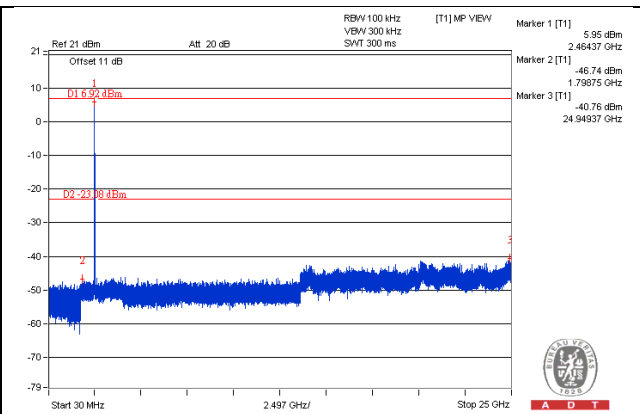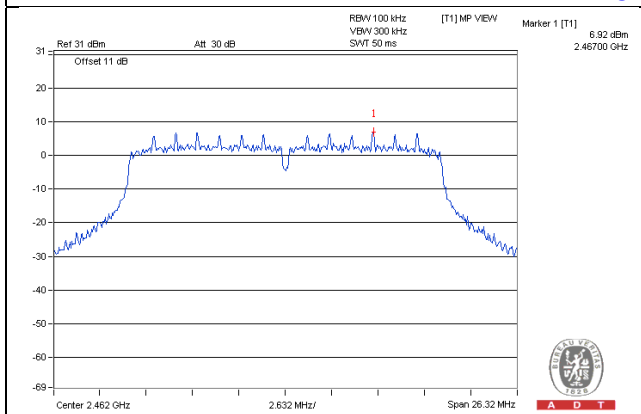

## CH 1 Band edge


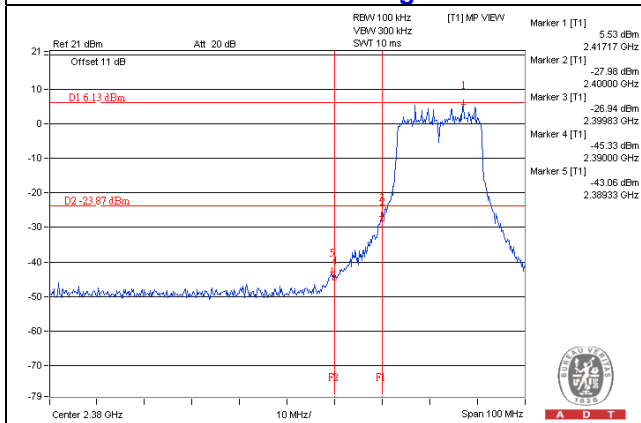


## CH 11 Band edge


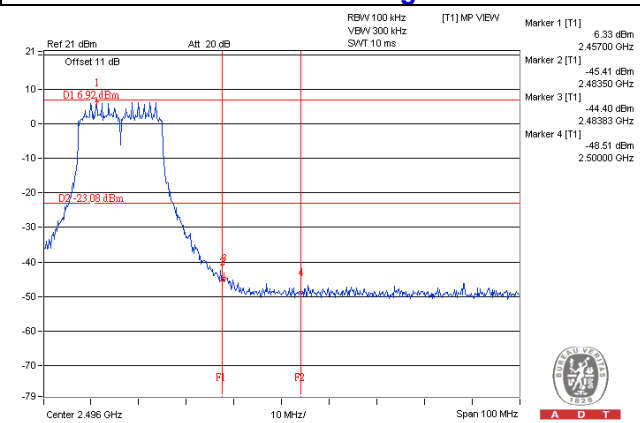


CHAIN 1



CH 1

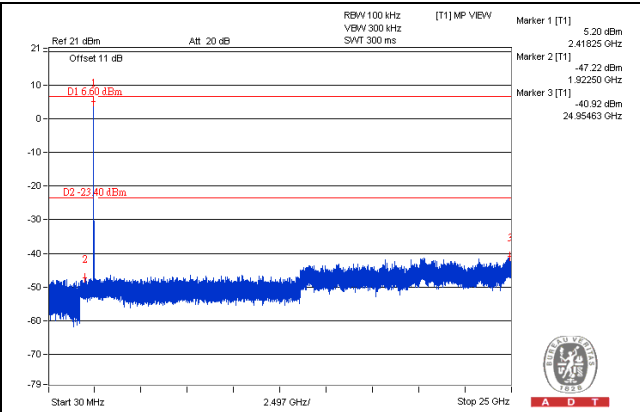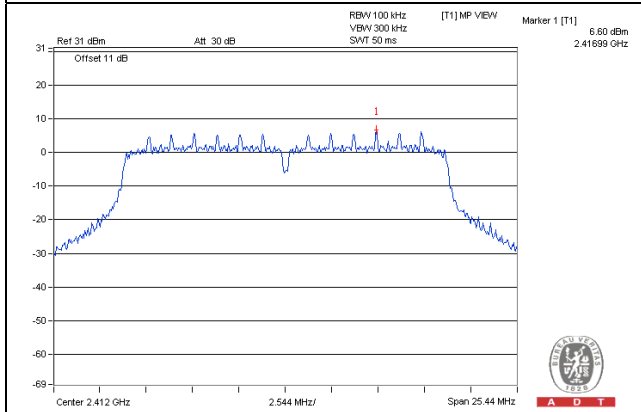

CH 6

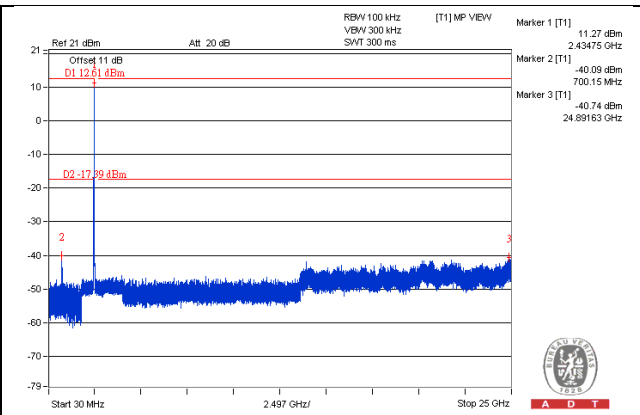
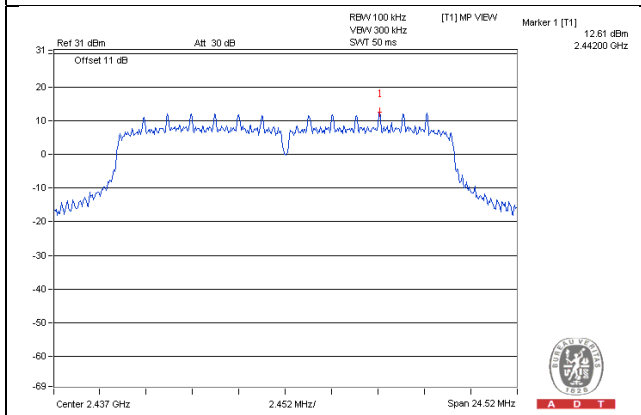


CH 11

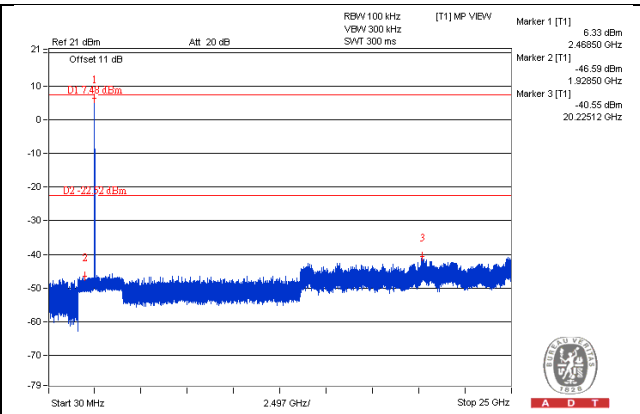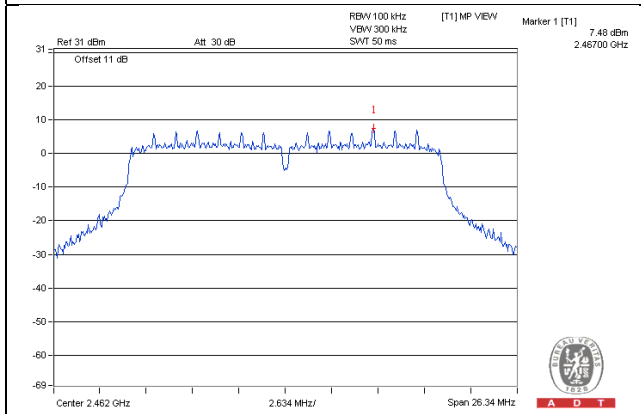



CH 1 Band edge

CH 11 Band edge

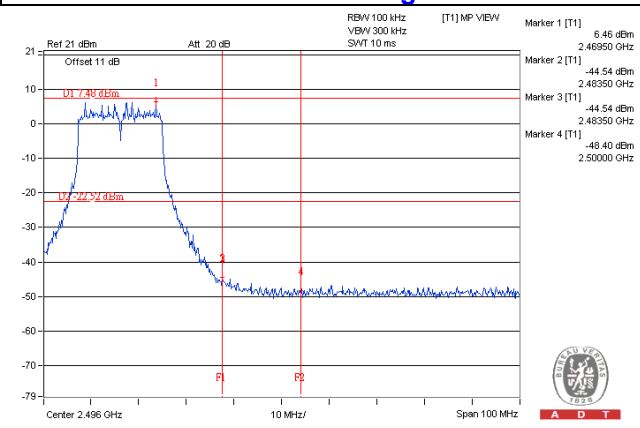
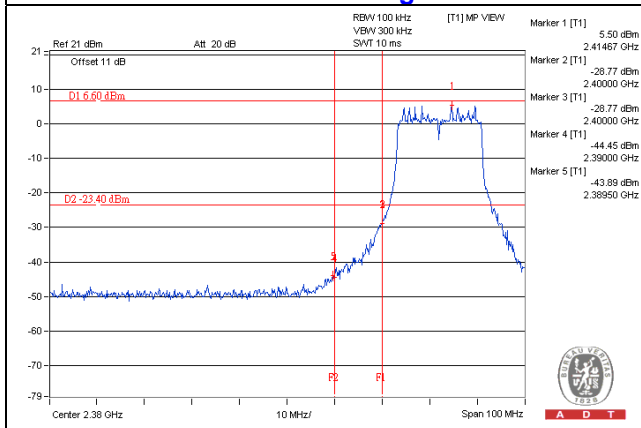


CHAIN 2



CH 1

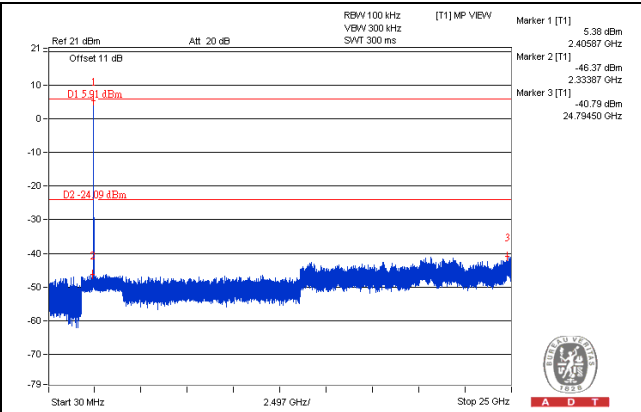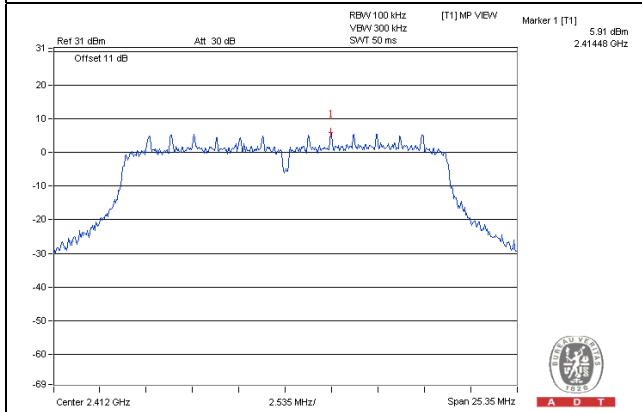

CH 6

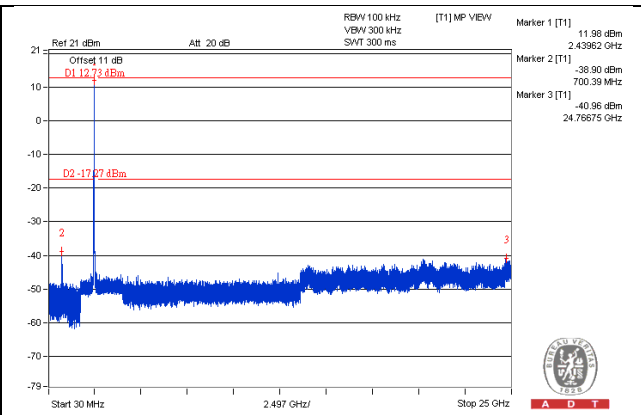
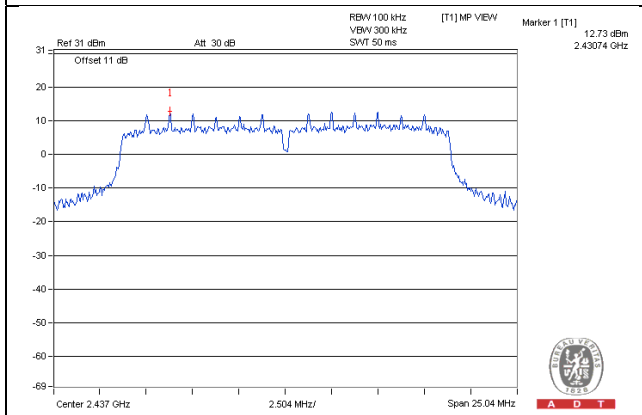










CH 11







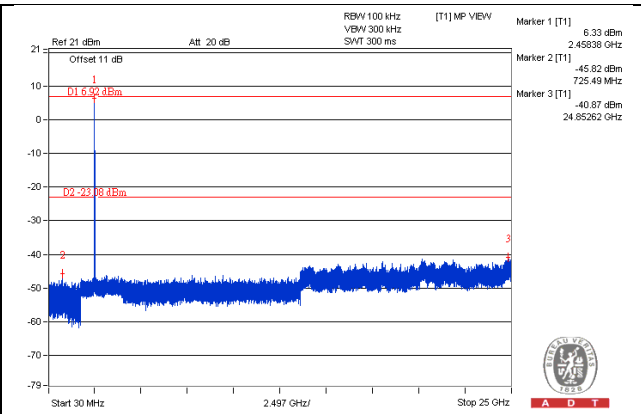
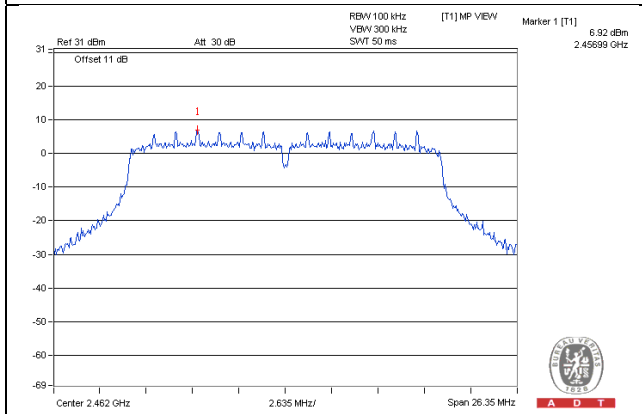


CH 1 Band edge

CH 11 Band edge

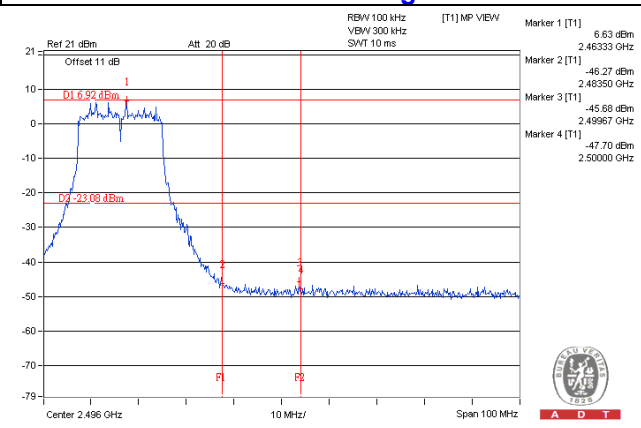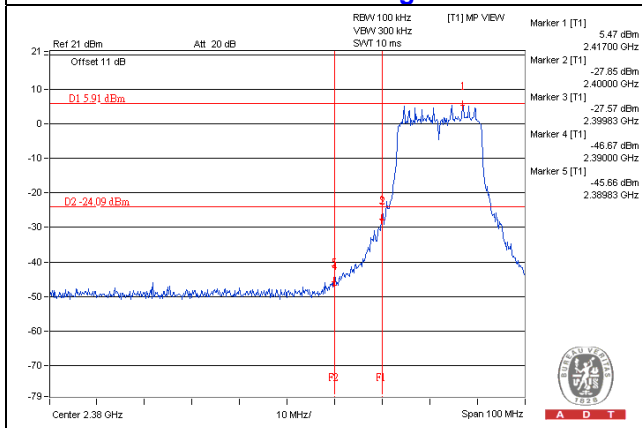

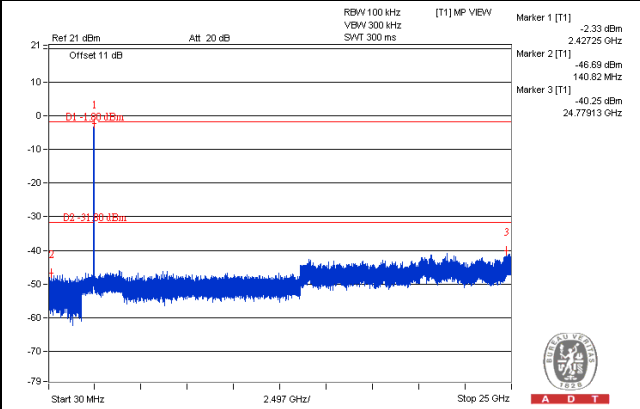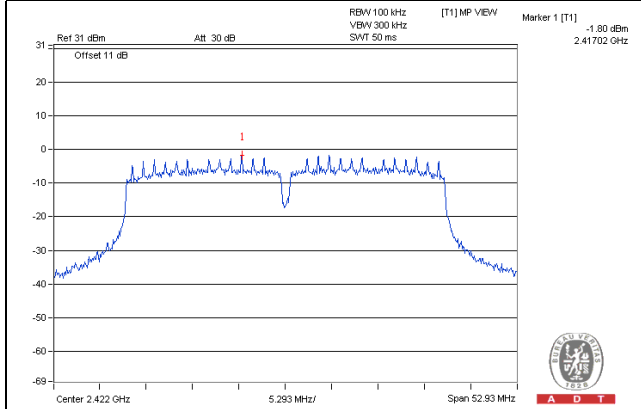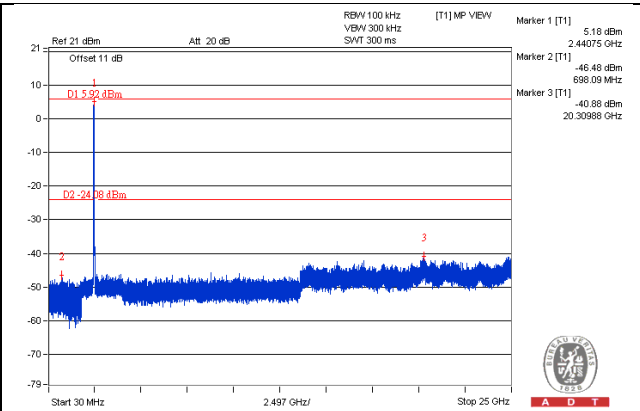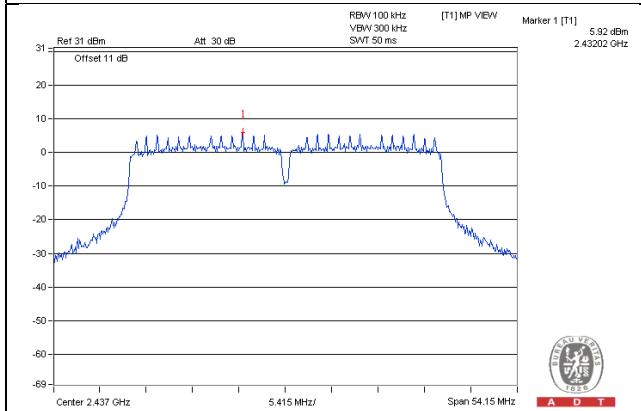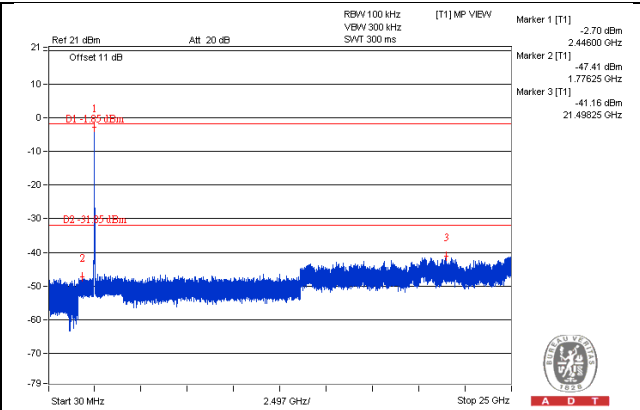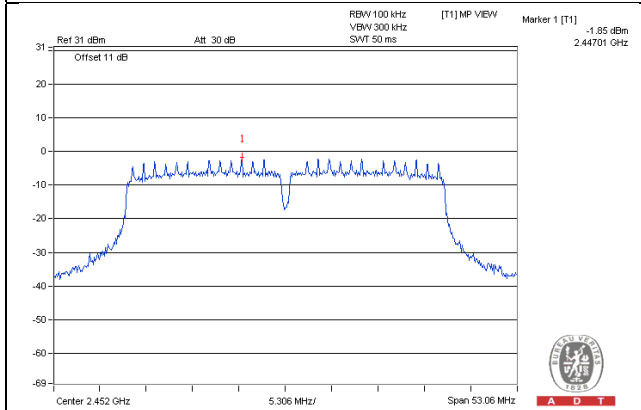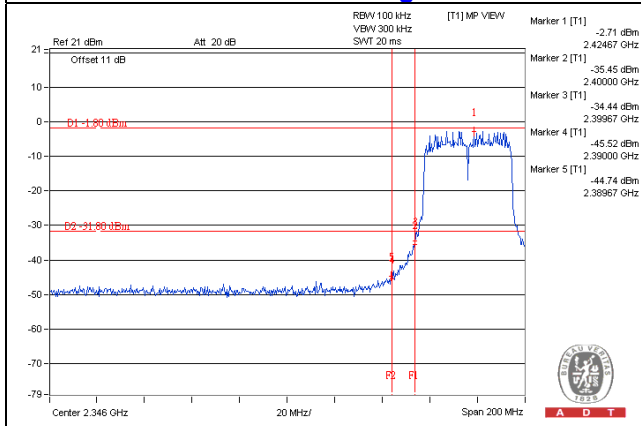
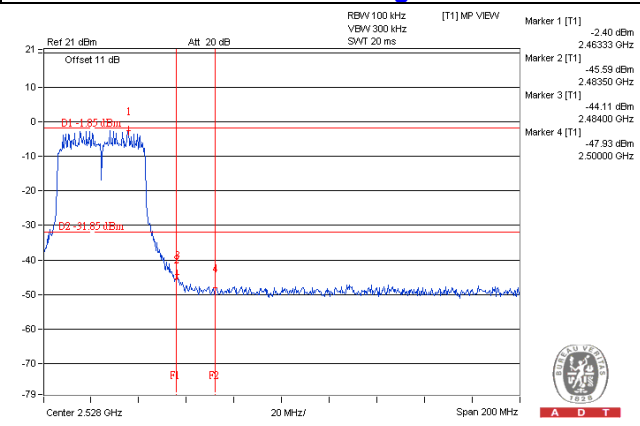
**802.11n (HT40)\_CHAIN 0**
**CH 3**

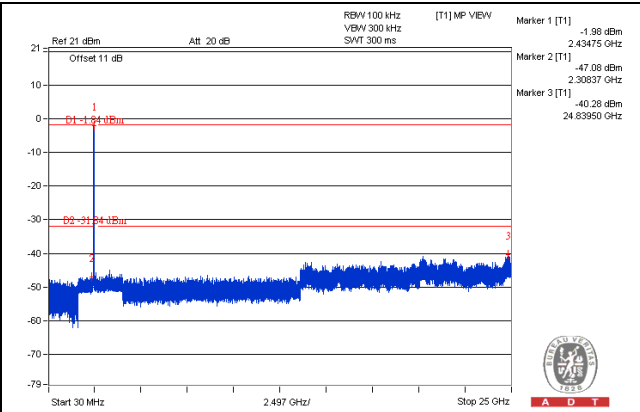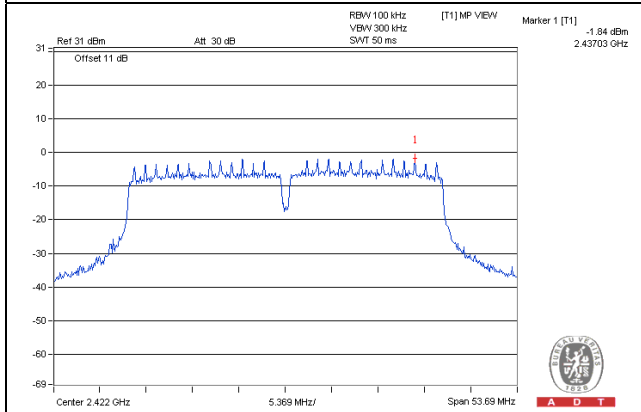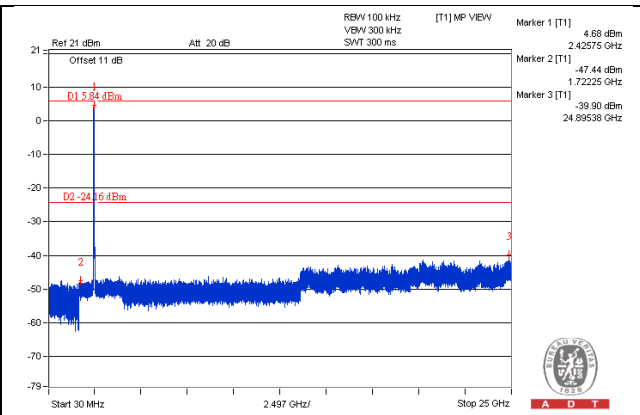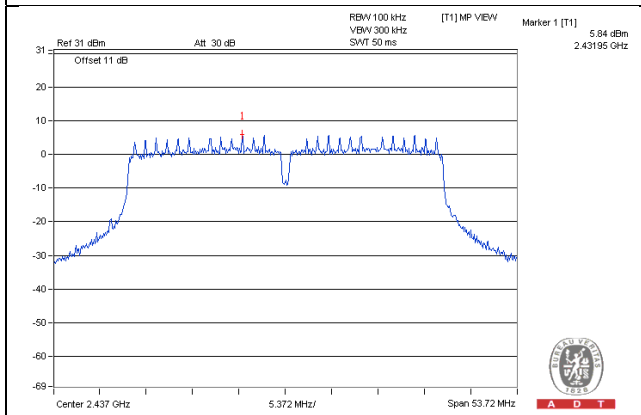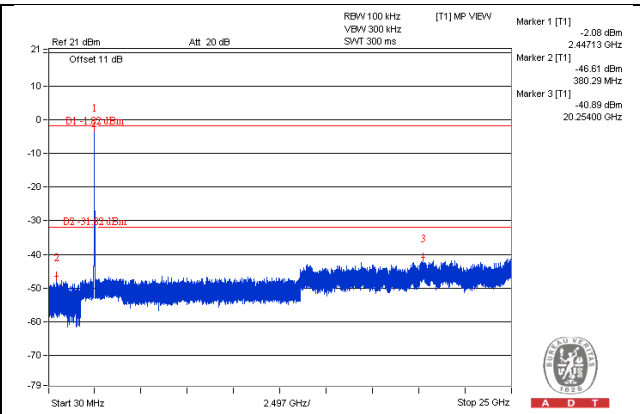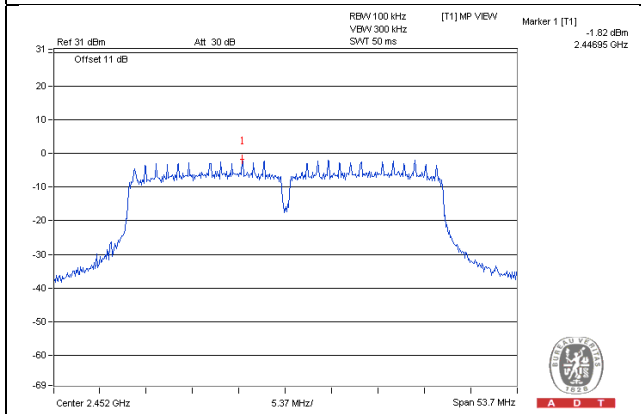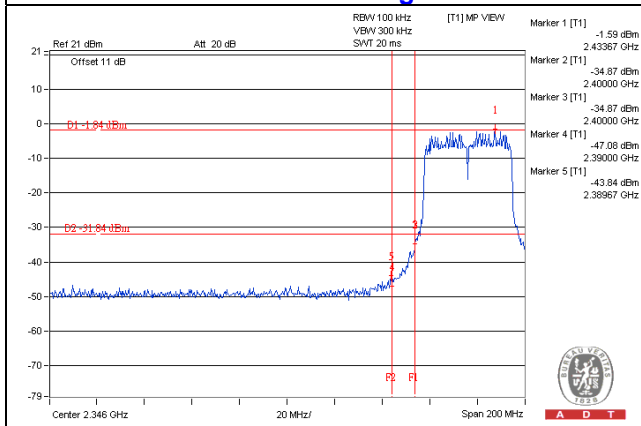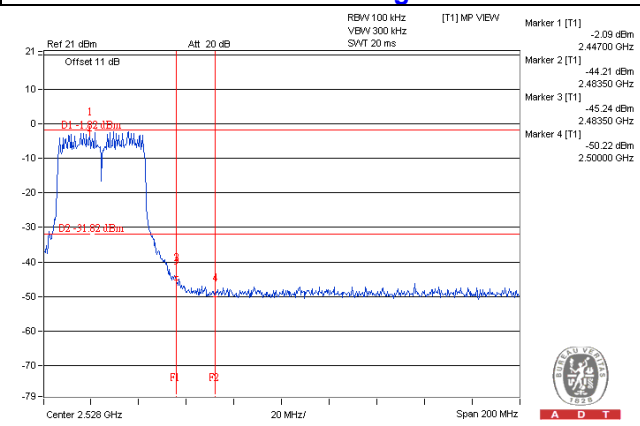**CH 6**

**CH 9**

**CH 3 Band edge**

**CH 9 Band edge**

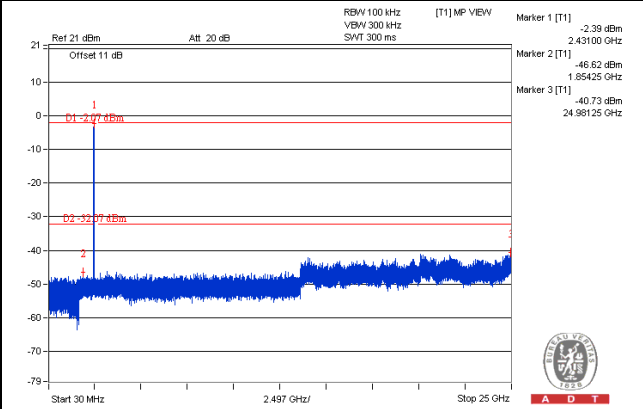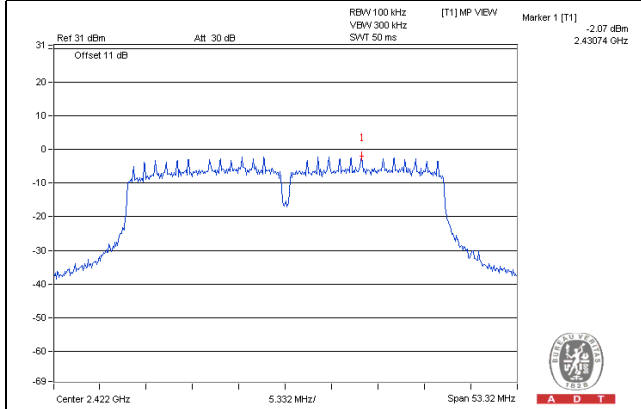
**CHAIN 1**
**CH 3**

**CH 6**

**CH 9**

**CH 3 Band edge**

**CH 9 Band edge**


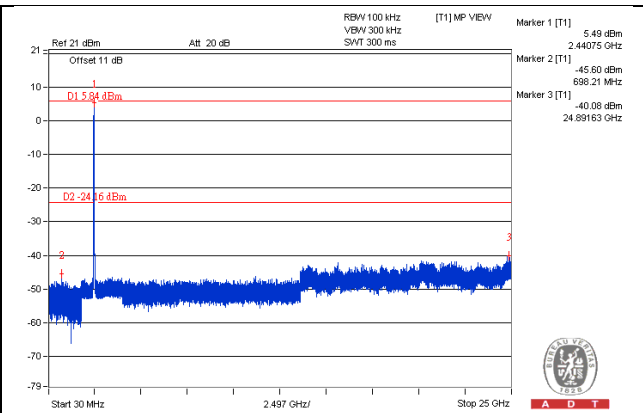
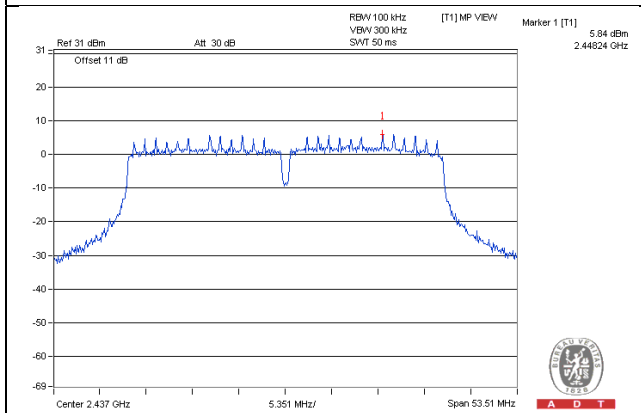


CHAIN 2



CH 3



CH 6





CH 9

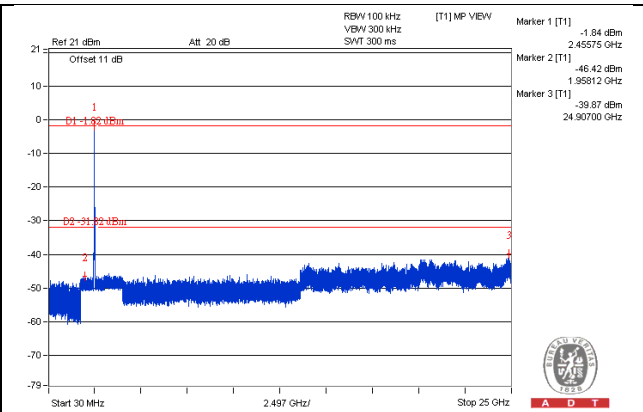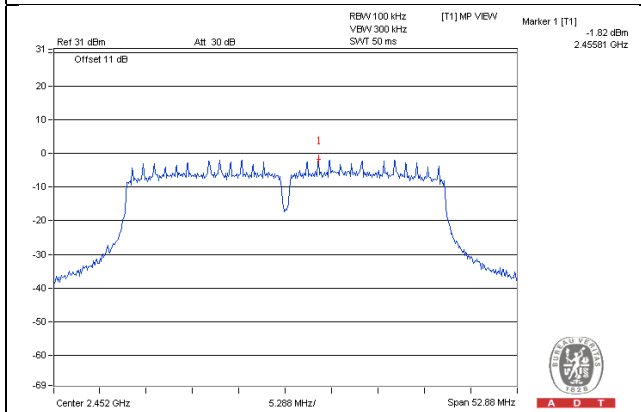

CH 3 Band edge

CH 9 Band edge

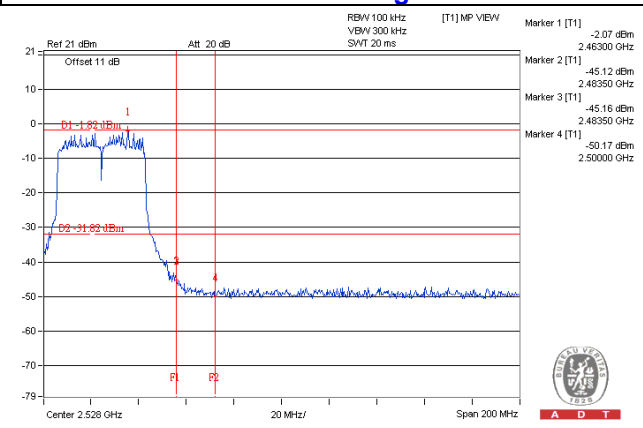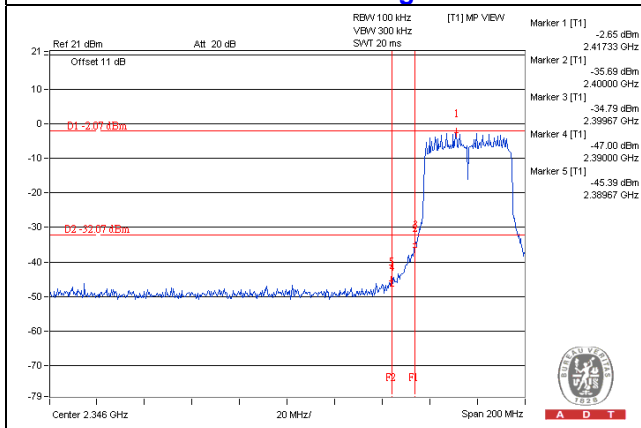



## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### **Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

### **Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-5935343

Fax: 886-3-5935342

### **Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---