



FCC RADIO TEST REPORT

FCC ID : TVE-3417T0695A

Equipment : Network Security Gateway

Brand Name : FORTINET **FORTINET**

Model Name : FortiWiFi 80F-2R-POExxxxxx, FORTIWIFI-80F-2R-POExxxxxx,
FWF-80F-2R-POExxxxxx,
FortiWiFi 81F-2R-POExxxxxx, FORTIWIFI-81F-2R-POExxxxxx,
FWF-81F-2R-POExxxxxx,
FortiWiFi 80F-2R-3G4G-POExxxxxx,
FORTIWIFI-80F-2R-3G4G-POExxxxxx,
FWF-80F-2R-3G4G-POExxxxxx,
FortiWiFi 81F-2R-3G4G-POExxxxxx,
FORTIWIFI-81F-2R-3G4G-POExxxxxx,
FWF-81F-2R-3G4G-POExxxxxx
(where "x" can be used "A-Z", or "0-9", or "-", or blank for software purposes or marketing purposes only)

Marketing Name : FortiWiFi 80F-2R-POE, FortiWiFi 81F-2R-POE, FortiWiFi 80F-2R-3G4G-POE, FortiWiFi 81F-2R-3G4G-POE

Applicant : Fortinet Inc.
899 KIFER RD
SUNNYVALE CA 94086
UNITED STATES

Manufacturer : Fortinet Inc.
899 KIFER RD
SUNNYVALE CA 94086
UNITED STATES

Standard : FCC Part 15 Subpart E §15.407



The product was received on Feb. 10, 2021 and testing was started from Mar. 11, 2021 and completed on Mar. 30, 2021. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....4

Summary of Test Result.....5

1 General Description6

 1.1 Product Feature of Equipment Under Test.....6

 1.2 Modification of EUT6

 1.3 Testing Location7

 1.4 Applicable Standards.....7

2 Test Configuration of Equipment Under Test8

 2.1 Carrier Frequency and Channel8

 2.2 Test Mode.....9

 2.3 Connection Diagram of Test System 11

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

3 Test Result12

 3.1 Maximum Conducted Output Power Measurement 12

 3.2 Unwanted Emissions Measurement 13

 3.3 AC Conducted Emission Measurement..... 17

 3.4 Antenna Requirements 19

4 List of Measuring Equipment.....20

5 Uncertainty of Evaluation22

Appendix A. Conducted Test Results

Appendix B. AC Conducted Emission Test Result

Appendix C. Radiated Spurious Emission

Appendix D. Radiated Spurious Emission Plots

Appendix E. Duty Cycle Plots



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.403(i)	6dB & 26dB Bandwidth	Not Required	-
-	2.1049	99% Occupied Bandwidth	Not Required	-
3.1	15.407(a)	Maximum Conducted Output Power	Pass	-
-	15.407(a)	Power Spectral Density	Not Required	-
3.2	15.407(b)	Unwanted Emissions	Pass	Under limit 1.28 dB at 5641.200 MHz
3.3	15.207	AC Conducted Emission	Pass	Under limit 14.60 dB at 12.655 MHz
-	15.407(c)	Automatically Discontinue Transmission	Not Required	-
3.4	15.203 15.407(a)	Antenna Requirement	Pass	-

Note:

1. Not required means after assessing, test items are not necessary to carry out.
2. This is a variant report by adding SKU (Model Name: FWF-81F-2R-3G4G-POE).All the test cases were performed on original report which can be referred to Sporton Report Number FR111826D. Based on the original report, the test cases were verified.

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Celery Wei



1 General Description

1.1 Product Feature of Equipment Under Test

WCDMA/LTE, Bluetooth - LE, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax and GNSS.

Product Specification subjective to this standard		
Antenna Type	WWAN: Dipole Antenna	
	WLAN: <Ant. 1> Dipole Antenna <Ant. 2> Dipole Antenna <Ant. 3> Dipole Antenna	
	Bluetooth - LE: <Ant. 4> PIFA Antenna	
	GPS/Glonass/BDS/Galileo: Dipole Antenna	
Antenna information		
5725 MHz ~ 5850 MHz	Peak Gain (dBi)	<Ant. 1>: 1.58
		<Ant. 2>: 1.58
		<Ant. 3>: 1.58

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH05-HY (TAF Code: 1190)
Remark	The Conducted test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH16-HY; CO07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in two antenna degrees (Ant. Horizontal and Ant. Vertical). The worst cases (Ant. Vertical) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel in "#n" were 802.11ac VHT80 and 802.11ax HE80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Single Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Remark: The device have support beamforming function in 802.11 ac/ax mode, the manufacturer defines worst case were Non Beamforming, other test items only test worst case and documented.




Test Cases	
AC Conducted Emission	Mode 1 : LTE Band 41 Link + Bluetooth Link + WLAN (5GHz) Link + Adapter *2 Mode 2 : LTE Band 41 Idle + Bluetooth Idle + WLAN (5GHz) Idle + Adapter *2
Remark: The worst case of conducted emission is mode 1; only the test data of it was reported.	

Ch. #		Band IV : 5725-5850 MHz		
		802.11ac VHT80	802.11ax HE20	802.11ax HE80
L	Low	-	149	-
M	Middle	155	-	155
H	High	-	-	-

Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

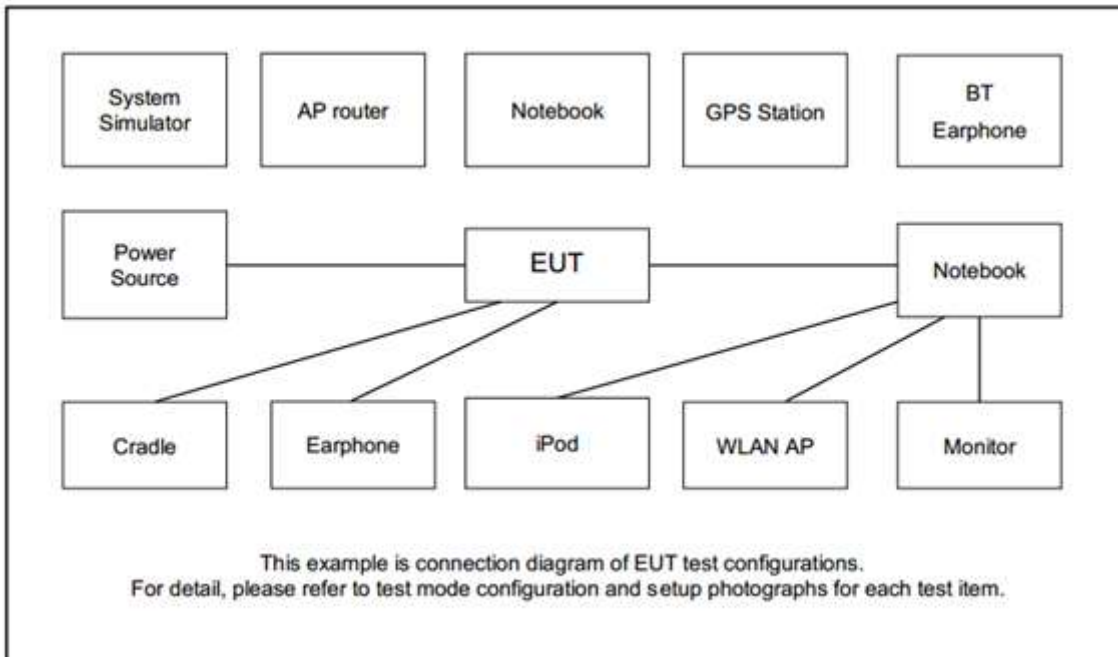

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude 5310	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Smart Phone	ACER	T02	FCC Doc	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “QSPR Version 5.0-00196” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Maximum Conducted Output Power Measurement

3.1.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.


3.1.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.1.4 Test Setup

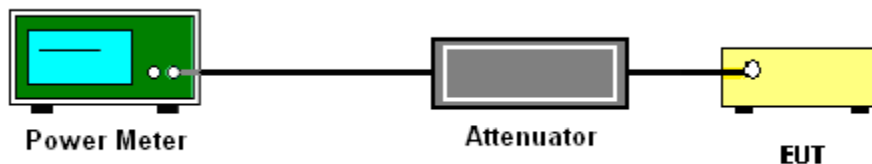

3.1.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.2 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.2.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.



3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1 GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


7. For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.2.4 Test Setup


For radiated emissions below 30MHz

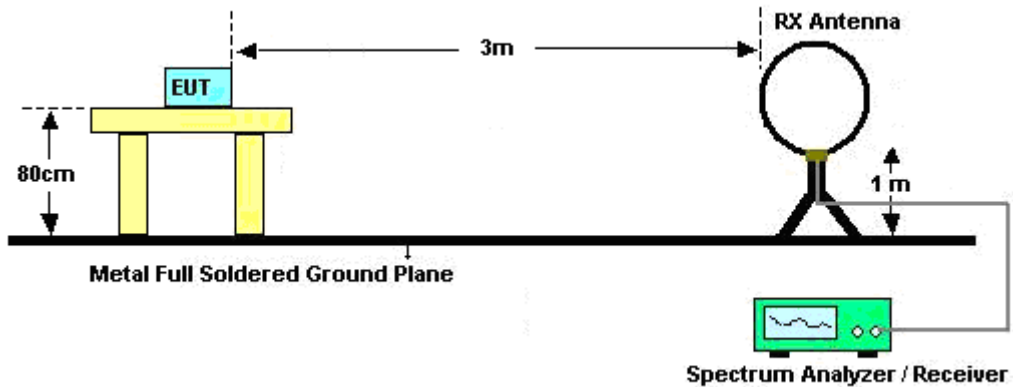

For radiated emissions from 30MHz to 1GHz

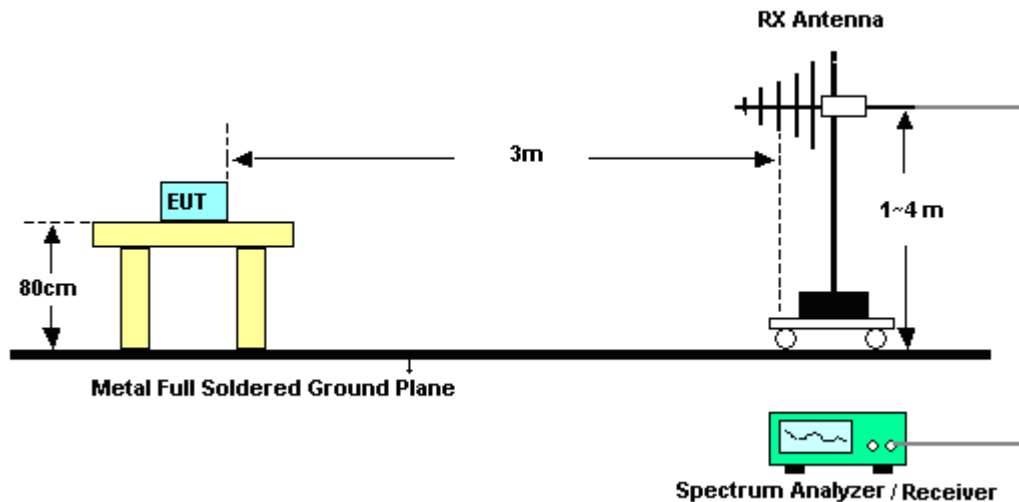

For radiated test above 1GHz

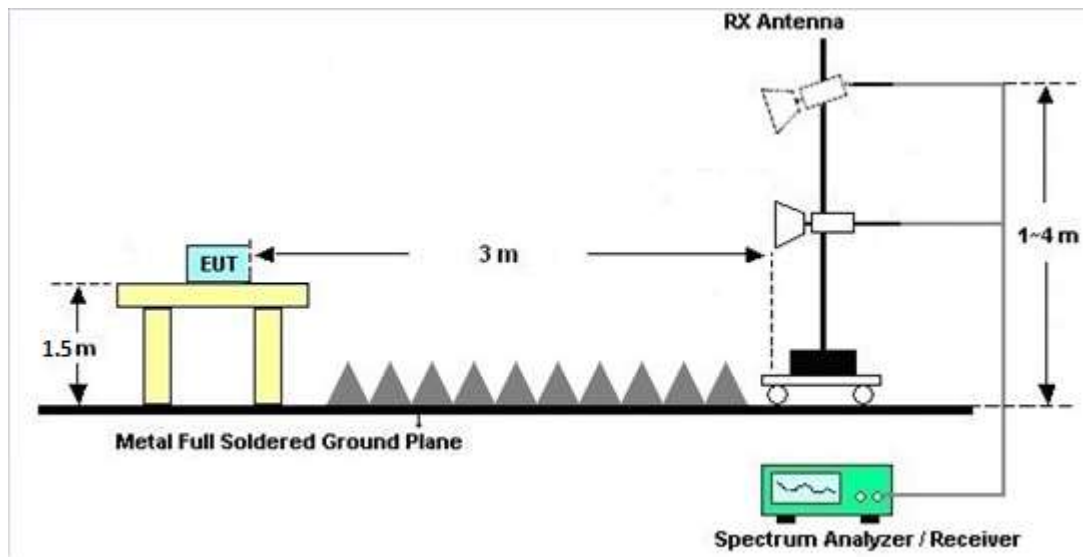

3.2.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.2.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.2.7 Duty Cycle

Please refer to Appendix E.

3.2.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.3 AC Conducted Emission Measurement

3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.3.4 Test Setup

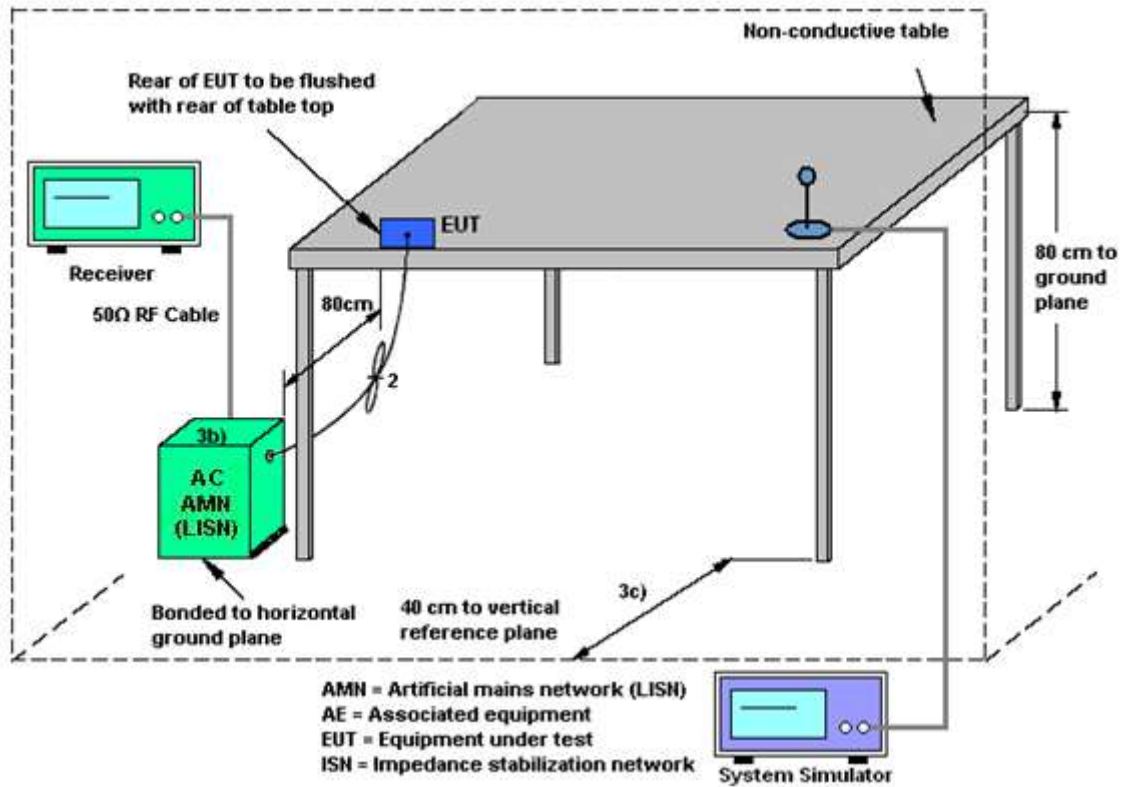

3.3.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.4 Antenna Requirements

3.4.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.4.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jul. 14, 2020	Mar. 12, 2021~ Mar. 29, 2021	Jul. 13, 2021	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01 N-06	47020 & 06	30MHz to 1GHz	Oct. 11, 2020	Mar. 12, 2021~ Mar. 29, 2021	Oct. 10, 2021	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1G	Sep. 30, 2020	Mar. 12, 2021~ Mar. 29, 2021	Sep. 29, 2021	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-152 2	1G~18GHz	Sep. 29, 2020	Mar. 12, 2021~ Mar. 29, 2021	Sep. 28, 2021	Radiation (03CH16-HY)
Amplifier	EMCI	EMC051845S E	980729	1-18GHz	Jul. 10, 2020	Mar. 12, 2021~ Mar. 29, 2021	Jul. 09, 2021	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 576	18GHz ~40GHz	May 22, 2020	Mar. 12, 2021~ Mar. 29, 2021	May 21, 2021	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY532702 64	1GHz~26.5GHz	Dec. 10, 2020	Mar. 12, 2021~ Mar. 29, 2021	Dec. 09, 2021	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A	MY590530 12	3Hz~26.5GHz	Nov. 18, 2020	Mar. 12, 2021~ Mar. 29, 2021	Nov. 17, 2021	Radiation (03CH16-HY)
Spectrum Analyzer	Agilent	N9010A	MY534701 18	10Hz~44GHz	Jan. 15, 2021	Mar. 12, 2021~ Mar. 29, 2021	Jan. 14, 2022	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11680/ 4PE	NA	Aug. 29, 2020	Mar. 12, 2021~ Mar. 29, 2021	Aug. 28, 2021	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11688/ 4PE	NA	Aug. 29, 2020	Mar. 12, 2021~ Mar. 29, 2021	Aug. 28, 2021	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	EC-A5-300 -5757	NA	Aug. 29, 2020	Mar. 12, 2021~ Mar. 29, 2021	Aug. 28, 2021	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Mar. 12, 2021~ Mar. 29, 2021	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Mar. 12, 2021~ Mar. 29, 2021	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Mar. 12, 2021~ Mar. 29, 2021	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Mar. 12, 2021~ Mar. 29, 2021	N/A	Radiation (03CH16-HY)
Hygrometer	Testo	608-H1	34913904	N/A	Jul. 27, 2020	Mar. 11, 2021~ Mar. 12, 2021	Jul. 26, 2021	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO10	10MHz~6GHz	Dec. 09, 2020	Mar. 11, 2021~ Mar. 12, 2021	Dec. 08, 2021	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz ~ 40GHz	Jul. 22, 2020	Mar. 11, 2021~ Mar. 12, 2021	Jul. 21, 2021	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2020	Mar. 11, 2021~ Mar. 12, 2021	Mar. 16, 2021	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F3170400 33	N/A	N/A	Mar. 30, 2021	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 30, 2021	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBE CK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Nov. 02, 2020	Mar. 30, 2021	Nov. 01, 2021	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	N/A	Mar. 30, 2021	N/A	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Feb. 01, 2021	Mar. 30, 2021	Jan. 31, 2022	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Feb. 01, 2021	Mar. 30, 2021	Jan. 31, 2022	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 11, 2020	Mar. 30, 2021	Sep. 10, 2021	Conduction (CO07-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu	Temperature:	21~25	°C
Test Date:	2021/3/11~2021/3/12	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

Band IV single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 2	Ant 1	Ant 2	Ant 1	SUM	Ant 2	Ant 1	Ant 2	Ant 1	
11a	6Mbps	1	149	5745	0.06	-	21.90	-		30.00	-	1.58	-	Pass
11a	6Mbps	1	157	5785	0.06	-	21.80	-		30.00	-	1.58	-	Pass
11a	6Mbps	1	165	5825	0.06	-	21.70	-		30.00	-	1.58	-	Pass
HT20	MCS0	1	149	5745	0.25	-	21.90	-		30.00	-	1.58	-	Pass
HT20	MCS0	1	157	5785	0.25	-	21.80	-		30.00	-	1.58	-	Pass
HT20	MCS0	1	165	5825	0.25	-	21.70	-		30.00	-	1.58	-	Pass
HT40	MCS0	1	151	5755	0.18	-	20.70	-		30.00	-	1.58	-	Pass
HT40	MCS0	1	159	5795	0.18	-	21.50	-		30.00	-	1.58	-	Pass
VHT20	MCS0	1	149	5745	0.09	-	21.80	-		30.00	-	1.58	-	Pass
VHT20	MCS0	1	157	5785	0.09	-	21.70	-		30.00	-	1.58	-	Pass
VHT20	MCS0	1	165	5825	0.09	-	21.60	-		30.00	-	1.58	-	Pass
VHT40	MCS0	1	151	5755	0.18	-	20.60	-		30.00	-	1.58	-	Pass
VHT40	MCS0	1	159	5795	0.18	-	21.40	-		30.00	-	1.58	-	Pass
VHT80	MCS0	1	155	5775	0.41	-	17.70	-		30.00	-	1.58	-	Pass

<CDD Mode>

TEST RESULTS DATA
Average Power Table

Band IV MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 3	SUM	Ant 1	Ant 3	Ant 1	Ant 3	
11a	6Mbps	2	149	5745	22.60	22.90	25.76	30.00		1.58	Pass	
11a	6Mbps	2	157	5785	25.90	24.80	28.40	30.00		1.58	Pass	
11a	6Mbps	2	165	5825	25.50	25.50	28.51	30.00		1.58	Pass	
HT20	MCS0	2	149	5745	24.20	24.30	27.26	30.00		1.58	Pass	
HT20	MCS0	2	157	5785	25.40	24.30	27.90	30.00		1.58	Pass	
HT20	MCS0	2	165	5825	25.10	25.10	28.11	30.00		1.58	Pass	
HT40	MCS0	2	151	5755	24.20	24.00	27.11	30.00		1.58	Pass	
HT40	MCS0	2	159	5795	23.40	22.70	26.07	30.00		1.58	Pass	
VHT20	MCS0	2	149	5745	24.10	24.20	27.16	30.00		1.58	Pass	
VHT20	MCS0	2	157	5785	25.30	24.20	27.80	30.00		1.58	Pass	
VHT20	MCS0	2	165	5825	25.00	25.00	28.01	30.00		1.58	Pass	
VHT40	MCS0	2	151	5755	24.10	23.90	27.01	30.00		1.58	Pass	
VHT40	MCS0	2	159	5795	23.30	22.60	25.97	30.00		1.58	Pass	
VHT80	MCS0	2	155	5775	21.70	20.50	24.15	30.00		1.58	Pass	

TEST RESULTS DATA
Average Power Table

Band IV MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 3	SUM	Ant 1	Ant 3	Ant 1	Ant 3	
HE20	MCS0	2	149	5745	Full	24.30	24.40	27.36	30.00		1.58		Pass
HE20	MCS0	2	157	5785	Full	25.50	24.40	28.00	30.00		1.58		Pass
HE20	MCS0	2	165	5825	Full	25.20	25.20	28.21	30.00		1.58		Pass
HE40	MCS0	2	151	5755	Full	24.30	24.10	27.21	30.00		1.58		Pass
HE40	MCS0	2	159	5795	Full	23.50	22.80	26.17	30.00		1.58		Pass
HE80	MCS0	2	155	5775	Full	21.80	20.60	24.25	30.00		1.58		Pass

<TXBF Mode>

TEST RESULTS DATA
Average Power Table

Band IV MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 3	SUM	Ant 1	Ant 3	Ant 1	Ant 3	
VHT20	MCS0	2	149	5745	24.00	24.10	27.06	30.00		4.59		Pass
VHT20	MCS0	2	157	5785	25.20	24.10	27.70	30.00		4.59		Pass
VHT20	MCS0	2	165	5825	24.90	24.90	27.91	30.00		4.59		Pass
VHT40	MCS0	2	151	5755	24.00	23.80	26.91	30.00		4.59		Pass
VHT40	MCS0	2	159	5795	23.20	22.50	25.87	30.00		4.59		Pass
VHT80	MCS0	2	155	5775	21.60	20.40	24.05	30.00		4.59		Pass

TEST RESULTS DATA
Average Power Table

Band IV MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 3	SUM	Ant 1	Ant 3	Ant 1	Ant 3	
HE20	MCS0	2	149	5745	Full	24.20	24.30	27.26	30.00		4.59		Pass
HE20	MCS0	2	157	5785	Full	25.40	24.30	27.90	30.00		4.59		Pass
HE20	MCS0	2	165	5825	Full	25.10	25.10	28.11	30.00		4.59		Pass
HE40	MCS0	2	151	5755	Full	24.20	24.00	27.11	30.00		4.59		Pass
HE40	MCS0	2	159	5795	Full	23.40	22.70	26.07	30.00		4.59		Pass
HE80	MCS0	2	155	5775	Full	21.70	20.50	24.15	30.00		4.59		Pass




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Eric Jeng	Temperature :	23~25°C
		Relative Humidity :	58~62%

EUT Information

Report NO : 121023
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

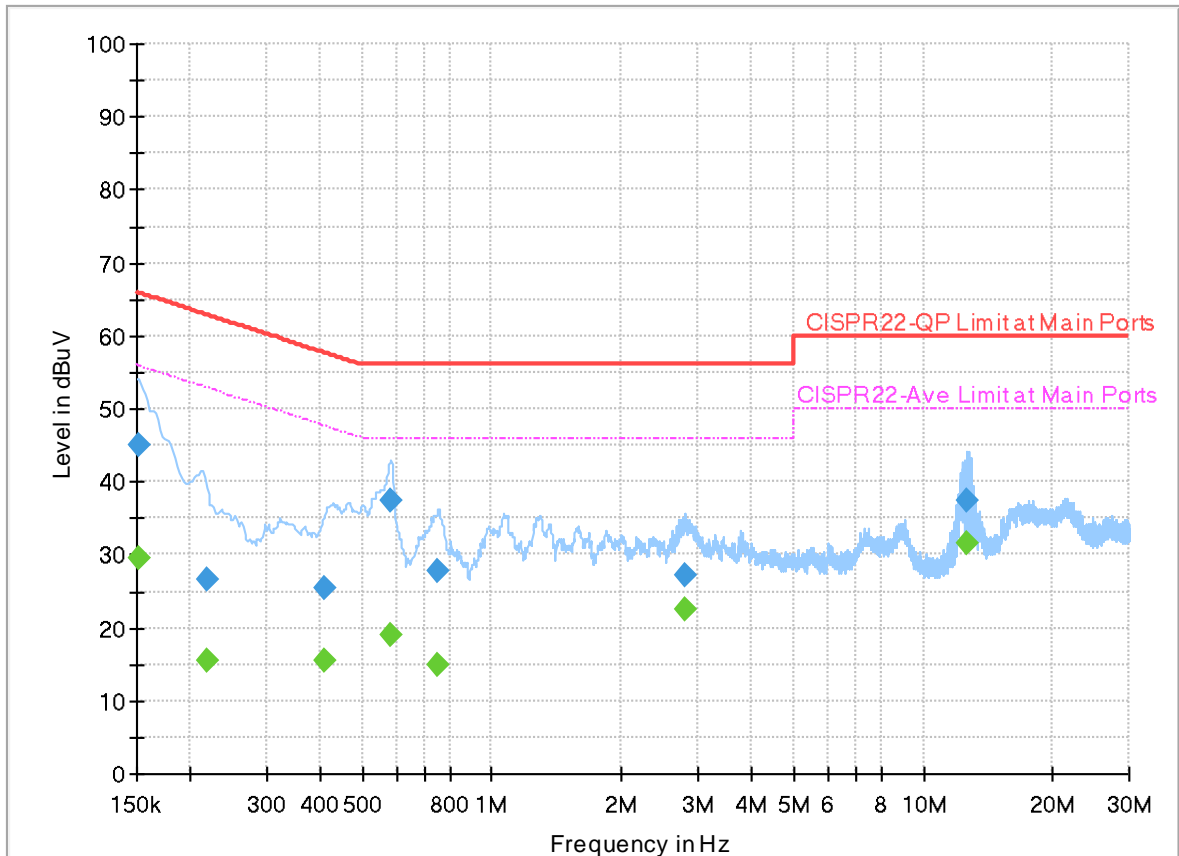


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152520	---	29.48	55.86	26.38	L1	OFF	20.0
0.152520	45.13	---	65.86	20.73	L1	OFF	20.0
0.217500	---	15.43	52.91	37.48	L1	OFF	20.0
0.217500	26.62	---	62.91	36.29	L1	OFF	20.0
0.411000	---	15.51	47.63	32.12	L1	OFF	20.0
0.411000	25.52	---	57.63	32.11	L1	OFF	20.0
0.582990	---	18.91	46.00	27.09	L1	OFF	20.0
0.582990	37.55	---	56.00	18.45	L1	OFF	20.0
0.749220	---	14.96	46.00	31.04	L1	OFF	20.0
0.749220	27.80	---	56.00	28.20	L1	OFF	20.0
2.794110	---	22.58	46.00	23.42	L1	OFF	20.1
2.794110	27.21	---	56.00	28.79	L1	OFF	20.1
12.650100	---	31.59	50.00	18.41	L1	OFF	20.2
12.650100	37.45	---	60.00	22.55	L1	OFF	20.2

EUT Information

Report NO : 121023
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

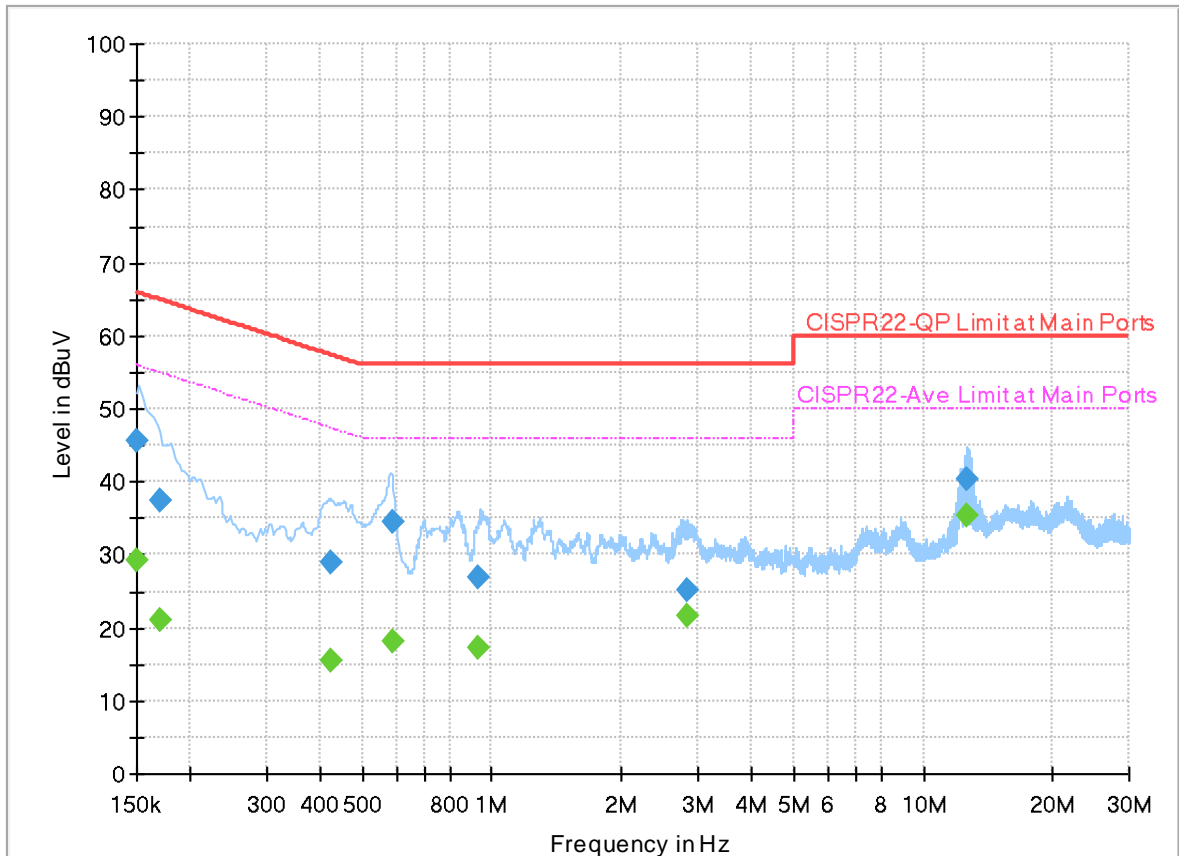

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	29.11	56.00	26.89	N	OFF	20.0
0.150000	45.60	---	66.00	20.40	N	OFF	20.0
0.170250	---	21.05	54.95	33.90	N	OFF	20.0
0.170250	37.46	---	64.95	27.49	N	OFF	20.0
0.424500	---	15.54	47.36	31.82	N	OFF	20.0
0.424500	28.84	---	57.36	28.52	N	OFF	20.0
0.588750	---	18.26	46.00	27.74	N	OFF	20.0
0.588750	34.45	---	56.00	21.55	N	OFF	20.0
0.933000	---	17.32	46.00	28.68	N	OFF	20.0
0.933000	26.91	---	56.00	29.09	N	OFF	20.0
2.821020	---	21.73	46.00	24.27	N	OFF	20.1
2.821020	25.28	---	56.00	30.72	N	OFF	20.1
12.655410	---	35.40	50.00	14.60	N	OFF	20.2
12.655410	40.38	---	60.00	19.62	N	OFF	20.2



Appendix C. Radiated Spurious Emission

Test Engineer :	Karl Hou, Caster Liao and Andy Yang	Temperature :	20~25°C
		Relative Humidity :	50~60%



Band 4 - 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11ac VHT80 CH 155 5775MHz		5637.6	59.74	-8.46	68.2	44.23	31.62	13.67	29.78	199	19	P	H	
		5699.6	69.22	-35.69	104.91	53.6	31.7	13.73	29.81	199	19	P	H	
		5718.2	75.74	-34.56	110.3	59.99	31.81	13.75	29.81	199	19	P	H	
		5722.2	76.77	-39.05	115.82	61	31.83	13.75	29.81	199	19	P	H	
	*	5775	99.58	-	-	83.61	32	13.8	29.83	199	19	P	H	
	*	5775	91.67	-	-	75.7	32	13.8	29.83	199	19	A	H	
		5850	62.92	-59.28	122.2	46.87	32.1	13.81	29.86	199	19	P	H	
		5859.8	62.78	-46.67	109.45	46.72	32.12	13.81	29.87	199	19	P	H	
		5876	58.4	-46.06	104.46	42.31	32.15	13.81	29.87	199	19	P	H	
		5925.4	56.19	-12.01	68.2	40.02	32.25	13.81	29.89	199	19	P	H	
														H
														H
			5639.8	66.1	-2.1	68.2	50.58	31.62	13.68	29.78	375	246	P	V
			5696.2	73.61	-28.79	102.4	57.99	31.69	13.73	29.8	375	246	P	V
			5718.8	81.78	-28.68	110.46	66.03	31.81	13.75	29.81	375	246	P	V
			5721.8	85.01	-29.89	114.9	69.24	31.83	13.75	29.81	375	246	P	V
	*		5775	107.26	-	-	91.29	32	13.8	29.83	375	246	P	V
	*		5775	99.53	-	-	83.56	32	13.8	29.83	375	246	A	V
			5850.2	73.76	-47.98	121.74	57.71	32.1	13.81	29.86	375	246	P	V
			5858.8	72.03	-37.7	109.73	55.97	32.12	13.81	29.87	375	246	P	V
		5877	68.07	-35.64	103.71	51.98	32.15	13.81	29.87	375	246	P	V	
		5925.8	59.11	-9.09	68.2	42.94	32.25	13.81	29.89	375	246	P	V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT80 CH 155 5775MHz		11550	48.64	-25.36	74	44.14	39.8	20.16	55.46	100	0	P	H	
		17325	52.24	-15.96	68.2	42.57	41.32	25.2	56.85	100	0	P	H	
													H	
													H	
			11550	48.9	-25.1	74	44.4	39.8	20.16	55.46	100	0	P	V
			17325	51	-17.2	68.2	41.33	41.32	25.2	56.85	100	0	P	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 - 5725~5850MHz

WIFI 802.11ax HE20_Full (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11ax HE20 CH 149 5745MHz		5601.4	54.88	-13.32	68.2	39.31	31.7	13.64	29.77	379	19	P	H	
		5699.6	58.15	-46.76	104.91	42.53	31.7	13.73	29.81	379	19	P	H	
		5719.8	76.38	-34.36	110.74	60.62	31.82	13.75	29.81	379	19	P	H	
		5724.8	81.4	-40.34	121.74	65.62	31.85	13.75	29.82	379	19	P	H	
	*	5745	118.92	-	-	103	31.97	13.77	29.82	379	19	P	H	
	*	5745	108.8	-	-	92.88	31.97	13.77	29.82	379	19	A	H	
														H
														H
			5639.4	57.57	-10.63	68.2	42.05	31.62	13.68	29.78	393	295	P	V
			5700	67.7	-37.5	105.2	52.08	31.7	13.73	29.81	393	295	P	V
			5719.2	82.51	-28.07	110.58	66.75	31.82	13.75	29.81	393	295	P	V
			5724.6	90.35	-30.94	121.29	74.57	31.85	13.75	29.82	393	295	P	V
	*		5745	125.11	-	-	109.19	31.97	13.77	29.82	393	295	P	V
	*		5745	115.81	-	-	99.89	31.97	13.77	29.82	393	295	A	V
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11ax HE20_Full (Harmonic @ 3m)

WIFI Ant. 1+3	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 CH 149 5745MHz		11490	62.69	-11.31	74	58.18	39.91	20.11	55.51	250	66	P	H	
		11490	52.32	-1.68	54	47.81	39.91	20.11	55.51	250	66	A	H	
		17235	55.63	-12.57	68.2	46.3	40.9	25.16	56.73	100	0	P	H	
													H	
			11490	61.98	-12.02	74	57.47	39.91	20.11	55.51	100	23	P	V
			11490	51.74	-2.26	54	47.23	39.91	20.11	55.51	100	23	A	V
			17235	56.76	-11.44	68.2	47.43	40.9	25.16	56.73	100	0	P	V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11ax HE80_Full (Band Edge @ 3m)

WIFI Ant. 1+3	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5645.2	60.53	-7.67	68.2	45.03	31.61	13.68	29.79	332	42	P	H
		5695.8	66.79	-35.31	102.1	51.17	31.69	13.73	29.8	332	42	P	H
		5714.8	69.1	-40.25	109.35	53.38	31.79	13.74	29.81	332	42	P	H
		5724.2	68.67	-51.71	120.38	52.89	31.85	13.75	29.82	332	42	P	H
	*	5775	107.91	-	-	91.94	32	13.8	29.83	332	42	P	H
	*	5775	97.59	-	-	81.62	32	13.8	29.83	332	42	A	H
		5854	70.6	-42.48	113.08	54.54	32.11	13.81	29.86	332	42	P	H
		5855.4	69.2	-41.49	110.69	53.15	32.11	13.81	29.87	332	42	P	H
		5875.4	64.81	-40.09	104.9	48.72	32.15	13.81	29.87	332	42	P	H
		5926.2	56.89	-11.31	68.2	40.72	32.25	13.81	29.89	332	42	P	H
802.11ax													H
HE80 Full													H
CH 155		5641.2	66.92	-1.28	68.2	51.4	31.62	13.68	29.78	393	288	P	V
5775MHz		5699.4	72.85	-31.91	104.76	57.23	31.7	13.73	29.81	393	288	P	V
		5710.4	74.28	-33.83	108.11	58.59	31.76	13.74	29.81	393	288	P	V
		5721	75.29	-37.79	113.08	59.52	31.83	13.75	29.81	393	288	P	V
	*	5775	113.69	-	-	97.72	32	13.8	29.83	393	288	P	V
	*	5775	104.6	-	-	88.63	32	13.8	29.83	393	288	A	V
		5852.2	75.05	-42.13	117.18	59	32.1	13.81	29.86	393	288	P	V
		5869.2	72.1	-34.72	106.82	56.02	32.14	13.81	29.87	393	288	P	V
		5881.6	69.51	-30.79	100.3	53.42	32.16	13.81	29.88	393	288	P	V
		5930.8	61.22	-6.98	68.2	45.04	32.26	13.81	29.89	393	288	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE80_Full (Harmonic @ 3m)

WIFI Ant. 1+3	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE80 Full CH 155 5775MHz		11550	54.92	-19.08	74	50.42	39.8	20.16	55.46	249	52	P	H	
		11550	45.7	-8.3	54	41.2	39.8	20.16	55.46	249	52	A	H	
		17325	52.09	-16.11	68.2	42.42	41.32	25.2	56.85	100	0	P	H	
													H	
			11550	55.42	-18.58	74	50.92	39.8	20.16	55.46	100	24	P	V
			11550	46.86	-7.14	54	42.36	39.8	20.16	55.46	100	24	A	V
			17325	51.27	-16.93	68.2	41.6	41.32	25.2	56.85	100	0	P	V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz
WIFI 802.11ax HE20 Full (LF @ 3m)

WIFI Ant. 1+3	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full LF		156.1	30.01	-13.49	43.5	43.86	16.92	2	32.77	-	-	P	H	
		333.61	35.23	-10.77	46	44.64	20.01	3.07	32.49	-	-	P	H	
		462.62	38.47	-7.53	46	43.87	23.51	3.64	32.55	100	52	Q	H	
		600.36	34.65	-11.35	46	37.45	25.65	4.22	32.67	-	-	P	H	
		765.26	36	-10	46	35.79	28.14	4.77	32.7	-	-	P	H	
		939.86	33.68	-12.32	46	29.76	30.3	5.42	31.8	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
			95.96	31.59	-11.91	43.5	47.22	15.49	1.5	32.62	-	-	P	V
			95.96	31.59	-11.91	43.5	47.22	15.49	1.5	32.62	-	-	P	V
			183.26	31.29	-12.21	43.5	46.87	15.05	2.23	32.86	-	-	P	V
			459.71	38.92	-7.08	46	44.39	23.45	3.62	32.54	100	0	P	V
			760.41	35.23	-10.77	46	35.02	28.14	4.75	32.68	-	-	P	V
			923.37	34.45	-11.55	46	31.3	29.84	5.37	32.06	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Karl Hou, Caster Liao and Andy Yang	Temperature :	20~25°C
		Relative Humidity :	50~60%

Note symbol

-L	Low channel location
-R	High channel location






Band 4 - 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
2	Horizontal	Fundamental
Peak	<p> <small>File: 2021-05-11</small> <small>5775.2824_25.27</small> <small>Unit: dBm/MHz</small> <small>Scale: 100.0</small> <small>Offset: 0.0</small> <small>Bandwidth: 100.0</small> <small>Resolution: 10.0</small> <small>Frequency (MHz): 5725 5730 5735 5740 5745 5750 5755 5760 5765 5770 5775 5780 5785</small> </p> <p> <small>Unit: 80211ac-VHT</small> <small>Condition: PEAK_SEARCH_15-24 In 9000_1527 HORIZONTAL</small> <small>Detector: Peak</small> <small>Project: 123003</small> </p>	<p> <small>File: 2021-05-11</small> <small>5775.2824_25.27</small> <small>Unit: dBm/MHz</small> <small>Scale: 100.0</small> <small>Offset: 0.0</small> <small>Bandwidth: 100.0</small> <small>Resolution: 10.0</small> <small>Frequency (MHz): 5725 5730 5735 5740 5745 5750 5755 5760 5765 5770 5775 5780 5785</small> </p> <p> <small>Unit: 80211ac-VHT</small> <small>Condition: PEAK_SEARCH_15-24 In 9000_1527 HORIZONTAL</small> <small>Detector: Peak</small> <small>Project: 123003</small> </p>
Peak	<p> <small>File: 2021-05-11</small> <small>5775.2824_25.27</small> <small>Unit: dBm/MHz</small> <small>Scale: 100.0</small> <small>Offset: 0.0</small> <small>Bandwidth: 100.0</small> <small>Resolution: 10.0</small> <small>Frequency (MHz): 5725 5730 5735 5740 5745 5750 5755 5760 5765 5770 5775 5780 5785</small> </p> <p> <small>Unit: 80211ac-VHT</small> <small>Condition: PEAK_SEARCH_15-24 In 9000_1527 HORIZONTAL</small> <small>Detector: Peak</small> <small>Project: 123003</small> </p>	Left blank

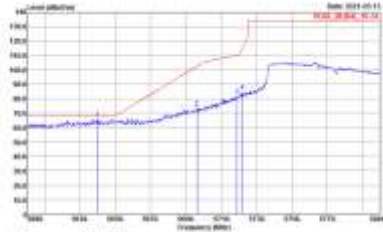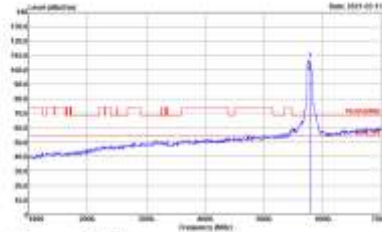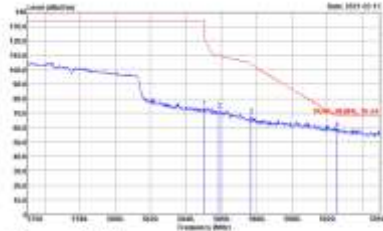

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
2	Vertical	Fundamental
Peak	 <p>Site : 03CH0-HY Condition : PEAK_032013_05-24 3m 9000_7522 VERTICAL Detector : Peak Project : 123003</p>	 <p>Site : 03CH0-HY Condition : PEAK_032013_05-24 3m 9000_7522 VERTICAL Detector : Peak Project : 123003</p>
Peak	 <p>Site : 03CH0-HY Condition : PEAK_032013_05-24 3m 9000_7522 VERTICAL Detector : Peak Project : 123003</p>	Left blank





Band 4 - 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
2	Horizontal	Vertical
Peak Avg.		





Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)

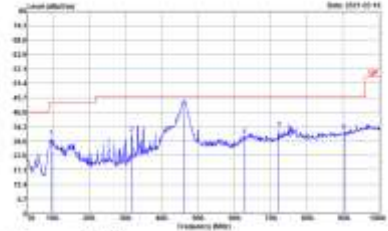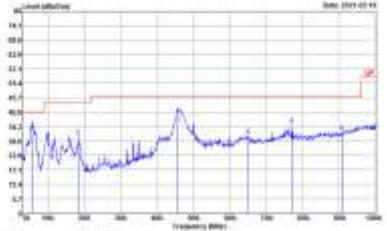WIFI	5GHz WIFI	
ANT	802.11ac VHT80 LF	
2	Horizontal	Vertical
QP / Peak	 <p>Site: 83242-HY Condition: QP 3m RSL OL 4700006 HORIZONTAL Detector: Peak Project: 12593</p>	 <p>Site: 83242-HY Condition: QP 3m RSL OL 4700006 VERTICAL Detector: Peak Project: 12593</p>


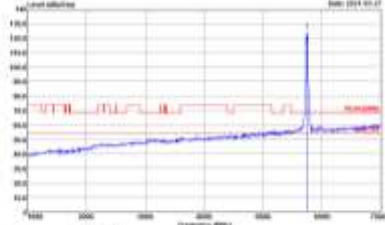


Band 4 - 5725~5850MHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

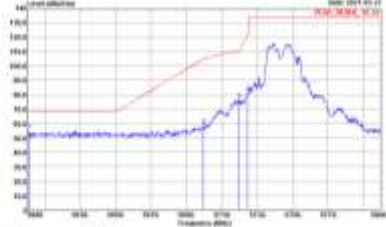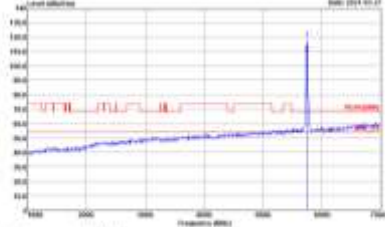WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH149 5745MHz	
1+3	Horizontal	Fundamental
Peak	 <p> <small>File</small> 152345-HY <small>Condition</small> PEAK_MEZHL15-24 3m FREQ_1523 HORIZONTAL <small>Marker</small> 0000000000 VVM-0000000000 M JMT:Auto <small>Detect</small> Peak </p>	 <p> <small>File</small> 152345-HY <small>Condition</small> PEAK_MEZHL15-24 3m FREQ_1523 HORIZONTAL <small>Marker</small> 0000000000 VVM-0000000000 M JMT:Auto <small>Detect</small> Peak </p>






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH149 5745MHz	
1+3	Vertical	Fundamental
Peak	 <p data-bbox="427 683 813 728"> <small>File: 121023-117</small> <small>Condition: PEAK_SEARCH_15-24 In FREQ_1522 VERTICAL</small> <small>Detector: BW=50000000 VFW=80000000 VPT=Auto</small> <small>Peak</small> </p>	 <p data-bbox="901 683 1287 728"> <small>File: 121023-117</small> <small>Condition: PEAK_SEARCH_15-24 In FREQ_1522 VERTICAL</small> <small>Detector: BW=50000000 VFW=80000000 VPT=Auto</small> <small>Peak</small> </p>



Band 4 5725~5850MHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
1+3	Horizontal	Fundamental
Peak	<p>Site : 03D45-HY Condition : PEAK_MEAS_15-24 3e 9100_252F HORIZONTAL Detector : Peak Project : 12003</p>	<p>Site : 03D45-HY Condition : PEAK_MEAS_15-24 3e 9100_252F HORIZONTAL Detector : Peak Project : 12003</p>
Peak	<p>Site : 03D45-HY Condition : PEAK_MEAS_15-24 3e 9100_252F HORIZONTAL Detector : Peak Project : 12003</p>	Left blank

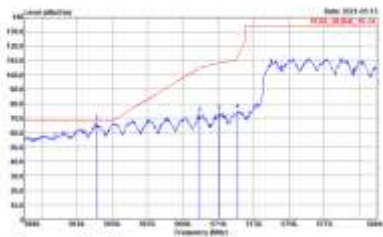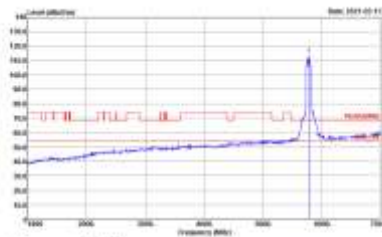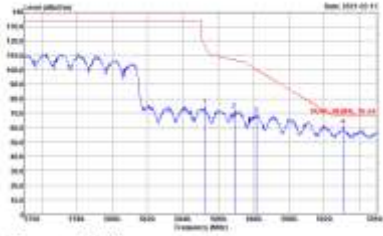

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
1+3	Vertical	Fundamental
Peak	 <p>Site : 03CH4-HY Condition : PEAK_032941_15-24 3e 91200_7522 VERTICAL BW: 50000000.0 VSW: 8000000.0 VPT: Auto Detector : Peak Project : 123003</p>	 <p>Site : 03CH4-HY Condition : PEAK_032941_15-24 3e 91200_7522 VERTICAL BW: 50000000.0 VSW: 8000000.0 VPT: Auto Detector : Peak Project : 123003</p>
Peak	 <p>Site : 03CH4-HY Condition : PEAK_032941_15-24 3e 91200_7522 VERTICAL BW: 50000000.0 VSW: 8000000.0 VPT: Auto Detector : Peak Project : 123003</p>	Left blank



Band 4 - 5725~5850MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH149 5745MHz	
1+3	Horizontal	Vertical
Peak Avg.	<p>Site: 002420-HY Condition: PEAK(AVG) In FLOOR_002 HORIZONTAL TestDate: Peak Project: 12503</p>	<p>Site: 002420-HY Condition: PEAK(AVG) In FLOOR_002 VERTICAL TestDate: Peak Project: 12503</p>



Band 4 5725~5850MHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
1+3	Horizontal	Vertical
Peak Avg.		



Emission below 1GHz
5GHz WIFI 802.11ax HE20 Full (LF)


WIFI	5GHz WIFI	
ANT	802.11ax HE20 Full LF	
1+3	Horizontal	Vertical
QP / Peak		



Appendix E. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
2	5GHz 802.11ac VHT80	91.00	455	2.20	3kHz	0.41
1+3	5GHz 802.11ax HE20 Full RU for Ant 1	96.12	5445	0.18	3kHz	0.17
1+3	5GHz 802.11ax HE20 Full RU for Ant 3	96.21	5465	0.18	3kHz	0.17
1+3	5GHz 802.11ax HE80 Full RU for Ant 1	93.80	5450	0.18	3kHz	0.28
1+3	5GHz 802.11ax HE80 Full RU for Ant 3	93.81	5460	0.18	3kHz	0.28

<Ant. 2>

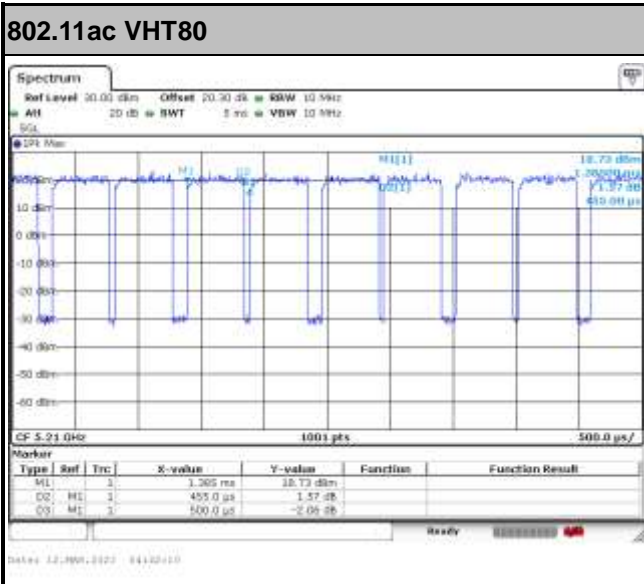




MIMO <Ant. 1>

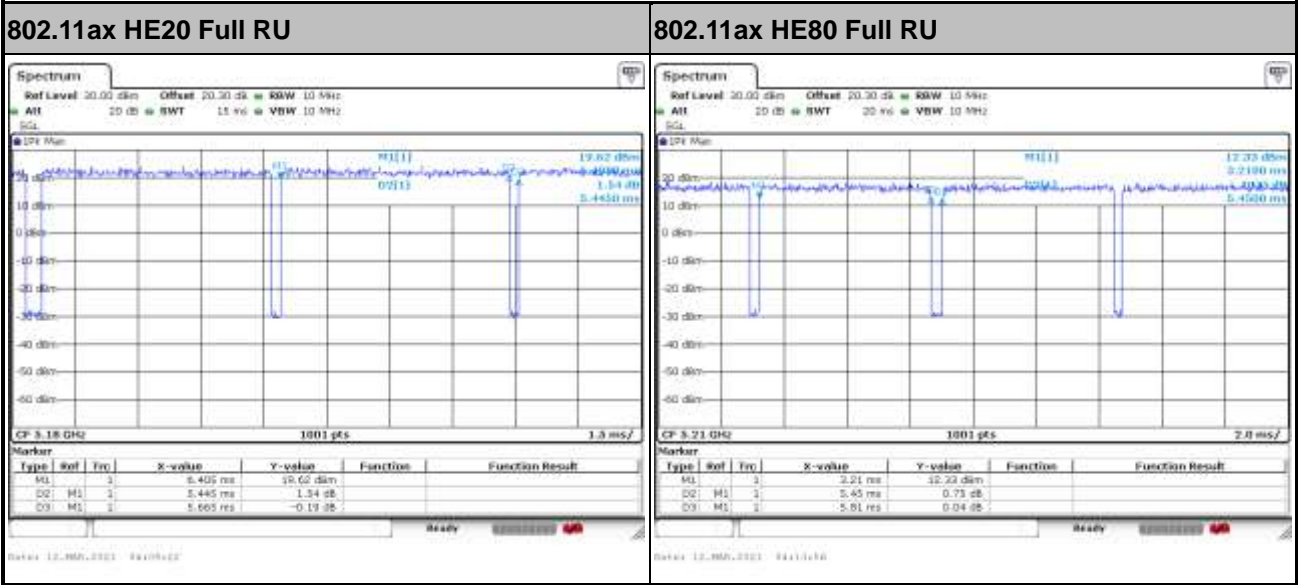

MIMO <Ant. 3>

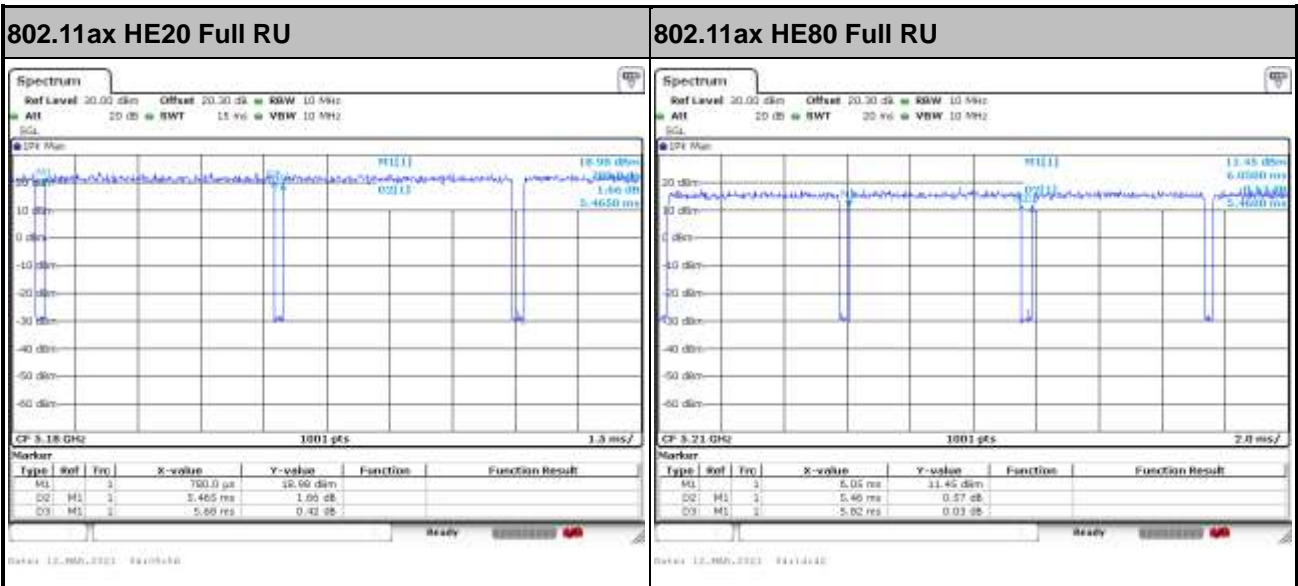

————THE END————