

# FCC Radio Test Report

**FCC ID** : TVE-5108TQ56462  
**Equipment** : Secured Wireless Access Point  
**Brand Name** : FORTINET  
**Model Name** : FortiAP 432Gxxxxxx, FAP-432Gxxxxxx, FORTIAP-432Gxxxxxx (Where "x" can be used as "A-Z", or "0-9", or "-", or blank for software changes or marketing purposes only)  
**Applicant** : Fortinet, Inc.  
899 Kifer Road, Sunnyvale, CA 94086, USA  
**Manufacturer** : Fortinet, Inc.  
899 Kifer Road, Sunnyvale, CA 94086, USA  
**Standard** : 47 CFR FCC Part 15.247

The product was received on Aug. 14, 2023, and testing was started from Nov. 16, 2023 and completed on Apr. 01, 2024. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.



Approved by: Jackson Tsai

**SPORTON INTERNATIONAL INC. Hsinhua Laboratory**

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



# Table of Contents

**HISTORY OF THIS TEST REPORT .....3**

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION .....5**

1.1 Information.....5

1.2 Testing Applied Standards .....9

1.3 Testing Location Information .....9

1.4 Measurement Uncertainty .....10

**2 TEST CONFIGURATION OF EUT.....11**

2.1 Test Channel Mode .....11

2.2 The Worst Case Measurement Configuration.....12

2.3 Accessories .....14

2.4 Support Equipment.....14

2.5 Test Setup Diagram .....15

**3 TRANSMITTER TEST RESULT .....17**

3.1 AC Power-line Conducted Emissions .....17

3.2 DTS Bandwidth.....19

3.3 Maximum Conducted Output Power .....20

3.4 Power Spectral Density .....22

3.5 Emissions in Non-restricted Frequency Bands .....23

3.6 Emissions in Restricted Frequency Bands.....24

**4 TEST EQUIPMENT AND CALIBRATION DATA.....28**

**APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS**

**APPENDIX B. TEST RESULTS OF DTS BANDWIDTH**

**APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER**

**APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY**

**APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS**

**APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS**

**APPENDIX G. TEST RESULTS OF RADIATED EMISSION CO-LOCATION**

**APPENDIX H. TEST PHOTOS**

**PHOTOGRAPHS OF EUT V01**



### History of this test report

Report No.	Version	Description	Issued Date
FR362304AL	01	Initial issue of report	Apr. 29, 2024



### Summary of Test Result

Report Clause	Ref.Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and explanations:</b>
None

Reviewed by: Terry Chang

Report Producer: Julie Tseng



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(125kbps)	1.0	1TX
2.4-2.4835GHz	BT-LE(500kbps)	1.0	1TX
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX
2.4-2.4835GHz	BT-LE(2Mbps)	2.0	1TX

Note:

- ♦ Bluetooth LE uses a GFSK (125kbps/500kbps/1Mbps/2Mbps) modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Bluetooth LE 125k/500k/1Mbps uses the same modulation, and 1Mbps was found to be the worst case scenario which was performed full test and recorded in this test report.



1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Support
1	1	SENAO	5718A0729300	Dipole	N-type	2.4G+5G
2	2	SENAO	5718A0729300	Dipole	N-type	2.4G+5G
3	1	SENAO	5718A0729300	Dipole	N-type	2.4G+5G
4	2	SENAO	5718A0729300	Dipole	N-type	2.4G+5G
5	1	SENAO	5718A0727300	Dipole	N-type	2.4G+5G+6G
6	2	SENAO	5718A0727300	Dipole	N-type	2.4G+5G+6G
7	3	SENAO	5718A0727300	Dipole	N-type	2.4G+5G+6G
8	4	SENAO	5718A0727300	Dipole	N-type	2.4G+5G+6G
9	1	SENAO	5718A0618300	Dipole	N-type	BT&Zigbee
10	1	Quectel	7102A0652000	Patch	I-Pex	GPS

Ant.	Port	Gain (dBi)					GPS	Remark		
		2.4G	5G	6G	BT& Zigbee					
1	1	4.82	5.89	-	-	-	Radio 1_ 2.4G 4*4	Radio 2_ 5G 4*4	Radio 2 (Low Band) (5G Band1/2) 4*4	
2	2	4.76	6.01	-	-	-				
3	3	5.03	6.4	-	-	-				
4	4	4.78	6.14	-	-	-				
5	1	4.26	5.75	5.8	-	-	Radio 3_ 6G 4*4	Radio 3 2.4G/5G/6G 2*2 Scan Radio	Radio 3 (High Band) (5G Band3/4) 4*4	
6	2	4.45	5.54	5.95	-	-				
7	3	4.81	5.5	5.65	-	-				
8	4	4.86	5.72	5.8	-	-				
9	1	-	-	-	4.71	-	-	-	-	
10	1	-	-	-	-	2	-	-	-	

Note 1: The EUT has ten antennas.

Note 2: Directional gain information

	Maximum Output Power	Power Spectral Density
<b>Non-BF</b>	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{in}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
<b>BF</b>	$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{in}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{in}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

**For 2.4GHz function:**

**< Radio 1 >**

For IEEE 802.11b/g/n/VHT/ax mode (4TX/4RX)

Ant.1 (port 1), Ant.2 (port 2), Ant.3 (port 3), Ant.4 (port 4) could transmit/receive simultaneously.

**< Radio 3 > < Scan >**

For IEEE 802.11b/g/n/VHT/ax mode (2RX)

Ant.5 (port 1), Ant.7 (port 3) can be used as receiving.

**For 5GHz function:**

**< Radio 2 >**

For IEEE 802.11a/n/ac/ax mode (4TX/4RX)

Ant.1 (port 1), Ant.2 (port 2), Ant.3 (port 3), Ant.4 (port 4) could transmit/receive simultaneously.

**< Radio 3 > < Scan >**

For IEEE 802.11a/n/ac/ax mode (2RX)

Ant.5 (port 1), Ant.7 (port 3) can be used as receiving.

**< Radio 2 > < Low Band >**

For IEEE 802.11a/n/ac/ax mode (4TX/4RX)

Ant.1 (port 1), Ant.2 (port 2), Ant.3 (port 3), Ant.4 (port 4) could transmit/receive simultaneously.

**< Radio 3 > < High Band >**

For IEEE 802.11a/n/ac/ax mode (4TX/4RX)

Ant.5 (port 1), Ant.6 (port 2), Ant.7 (port 3), Ant.8 (port 4) could transmit/receive simultaneously.

**For 6GHz function:**

**< Radio 3 >**

For IEEE 802.11a/ax mode (4TX/4RX)

Ant.5 (port 1), Ant.6 (port 2), Ant.7 (port 3), Ant.8 (port 4) could transmit/receive simultaneously.

**< Radio 3 > < Scan >**

For IEEE 802.11a/n/ac/ax mode (2RX)

Ant.5 (port 1), Ant.7 (port 3) can be used as receiving.

**For Bluetooth function:**

For Bluetooth mode (1TX/1RX)

Only Ant.9 can be used as transmitting/receiving.

**For GPS function:**

For GPS mode (1RX)

Only Ant.10 can be used as receiving.



1.1.3 EUT Information

Operational Condition	
EUT Power Type	From PoE
EUT Function	<input checked="" type="checkbox"/> Point-to-multipoint <input type="checkbox"/> Point-to-point
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device)
	Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems)
	Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
BT-LE(1Mbps)	0.852	0.7	2.131m	1k
BT-LE(2Mbps)	0.567	2.46	1.075m	1k

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.



### 1.1.5 Table for Multiple Listing

The brand/model names in the following table are all refer to the identical product.

Brand Name	Model Name	Description
FORTINET	FortiAP 432Gxxxxxx, FAP-432Gxxxxxx, FORTIAP-432Gxxxxxx (Where "x" can be used as "A-Z", or "0-9", or "-", or blank for software changes or marketing purposes only)	All the models are identical, the difference model served as marketing strategy.

From the above models, model: FAP-432G was selected as representative model for the test and its data was recorded in this report.

### 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF:

- KDB 558074 D01 v05r02
- KDB 414788 D01 v01r01

### 1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
<input checked="" type="checkbox"/>	Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)		
		TEL: 886-3-327-3456	FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Ivan Chung	21.1~22.3°C / 50~54%	01/Apr/2024
RF Conducted	TH07-HY	Xun Hsieh	21.9~23.3°C / 53~59%	21/Nov/2023
Radiated (Above 1G)	03CH02-HY	Darren Cho	22.2~23.4°C / 50~52%	16/Nov/2023~17/Nov/2023
Radiated (Below 1G)	03CH02-HY	Darren Cho	21.5~23.1°C / 49~51%	28/Dec/2023
Radiated (Co-location)	03CH02-HY	Daniel Lin	21.7~22.6°C / 51~54%	12/Mar/2024~13/Mar/2024
<input type="checkbox"/>	Wen 33rd.St. (TAF: 3785)	ADD: No.14-1, Ln. 19, Wen 33rd St., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)		
		TEL: 886-3-318-0787	FAX: 886-3-318-0287	
Test site Designation No. TW0008 with FCC.				



### 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	4.53 dB	Confidence levels of 95%
Bandwidth	3 MHz	Confidence levels of 95%
Maximum Conducted Output Power	2 dB	Confidence levels of 95%
Power Spectral Density	2 dB	Confidence levels of 95%
Emissions in Non-restricted Frequency Bands	0.14 dB	Confidence levels of 95%
Emissions in Restricted Frequency Bands	4.8 dB	Confidence levels of 95%
Temperature	0.41 °C	Confidence levels of 95%
Humidity	3.4 %	Confidence levels of 95%



## 2 Test Configuration of EUT

### 2.1 Test Channel Mode


Test Software Version	Dos6.1
-----------------------	--------

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	100
2440MHz	100
2480MHz	100
BT-LE(2Mbps)	-
2402MHz	100
2440MHz	100
2480MHz	100

## 2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	CTX
1	PoE mode ;BT TX

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
<b>Test Condition</b>	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	Emissions in Restricted Frequency Bands
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
<b>Operating Mode &lt; 1GHz</b>	CTX
1	PoE mode
<b>Operating Mode &gt; 1GHz</b>	CTX
<b>Orthogonal Planes of EUT</b>	<b>Y Plane</b>
	



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	CTX
1	Radio 1:2.4G + Radio 2:5G full + BT
2	Radio 1:2.4G + Radio 2:5G Low band(Band1/2) + Radio 3: 5G High band(Band3/4) + BT
3	Radio 1:2.4G + Radio 2:5G full + Zigbee
4	Radio 1:2.4G + Radio 2:5G Low band(Band1/2) + Radio 3: 5G High band(Band3/4) + Zigbee
Refer to Sporton Test Report No.: FA362304 for Co-location RF Exposure Evaluation and Appendix G for Radiated Emission Co-location.	

### 2.3 Accessories

Accessories				
PoE Adapter	Brand Name	Senao Inc.	Model Name	PIN060-54PR
	Power Rating	I/P: 100 - 240 Vac, 1.5 A, 50-60 Hz, O/P: 54 Vdc, 1.11 A		
AC CORD	Brand Name	I-SHENG	Model Name	AC CORD 600mm
	Signal Line	0.5 meter, shielded cable, w/o ferrite core		
BRACKET POLE MOUNT	Brand Name	CUN SHENG	Model Name	BRACKET POLE MOUNT LFP
BRACKET WALL MOUNT	Brand Name	Enrack	Model Name	BRACKET WALL MOUNT
Pole Mount Bracket	Brand Name	CUN SHENG	Model Name	6301A2873010
Ground Wire	Brand Name	BO YAO	Model Name	WIRE GEN AWG10 180cm
	Signal Line	1.8 meter, shielded cable, w/o ferrite core		

Reminder: Regarding to more detail and other information, please refer to user manual.


### 2.4 Support Equipment

Support Equipment – AC Conduction					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	RJ45 cable	Power Sync	CAT-6E-01	-	-


Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-
3	PoE	Senao Inc.	PIN060-54PR	-	Provided by Customer

Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	RJ45 cable	Power Sync	CAT-6E-01	-	-

## 2.5 Test Setup Diagram

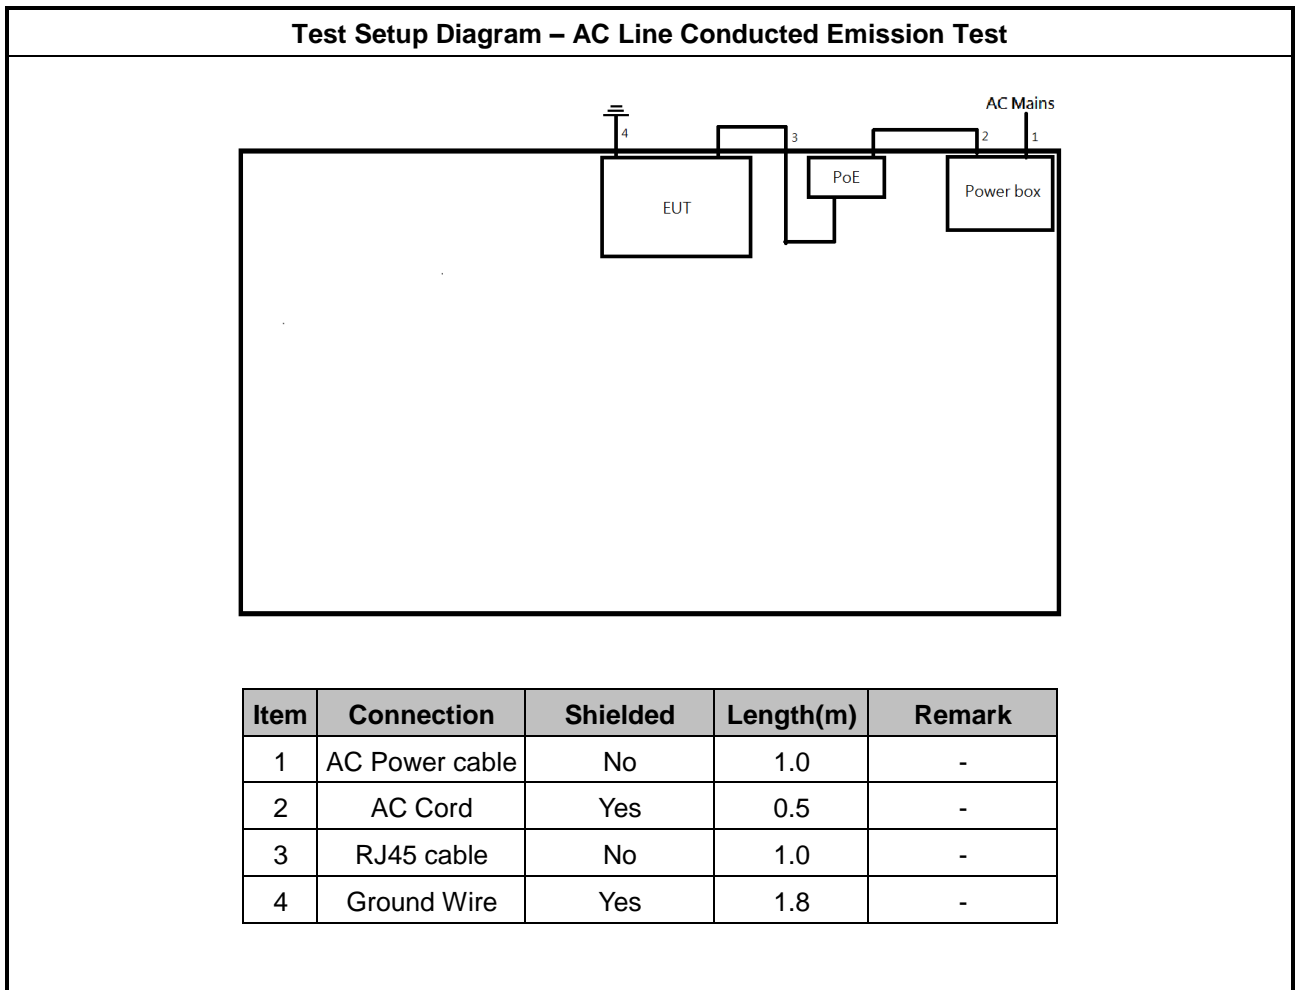

Test Setup Diagram - Radiated Test

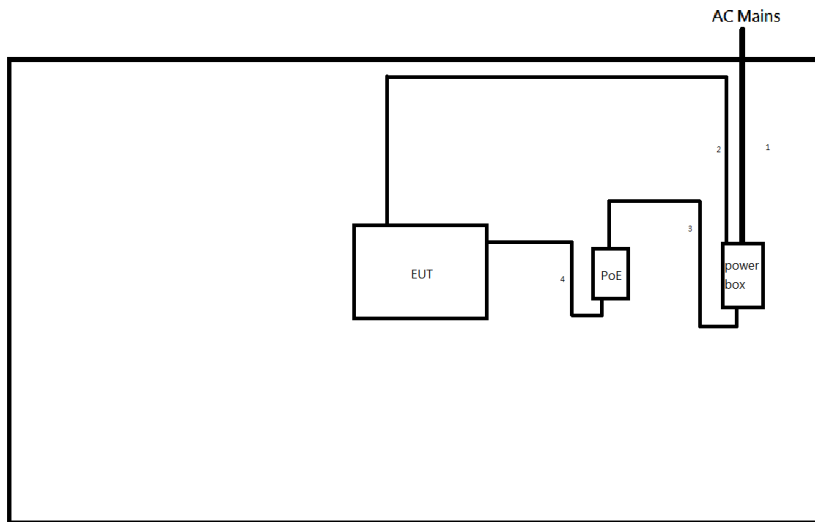

Item	Connection	Shielded	Length(m)	Remark
1	AC Power cable	No	1.8	-
2	Ground Wire	Yes	1.8	-
3	AC Cord	Yes	0.5	-
4	RJ45 cable	No	1.0	-



### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures


Test Method
<ul style="list-style-type: none"> <li>Refer as ANSI C63.10-2013, clause 6.2 foray power-line conducted emissions.</li> </ul>

##### 3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

### 3.1.5 Test Setup

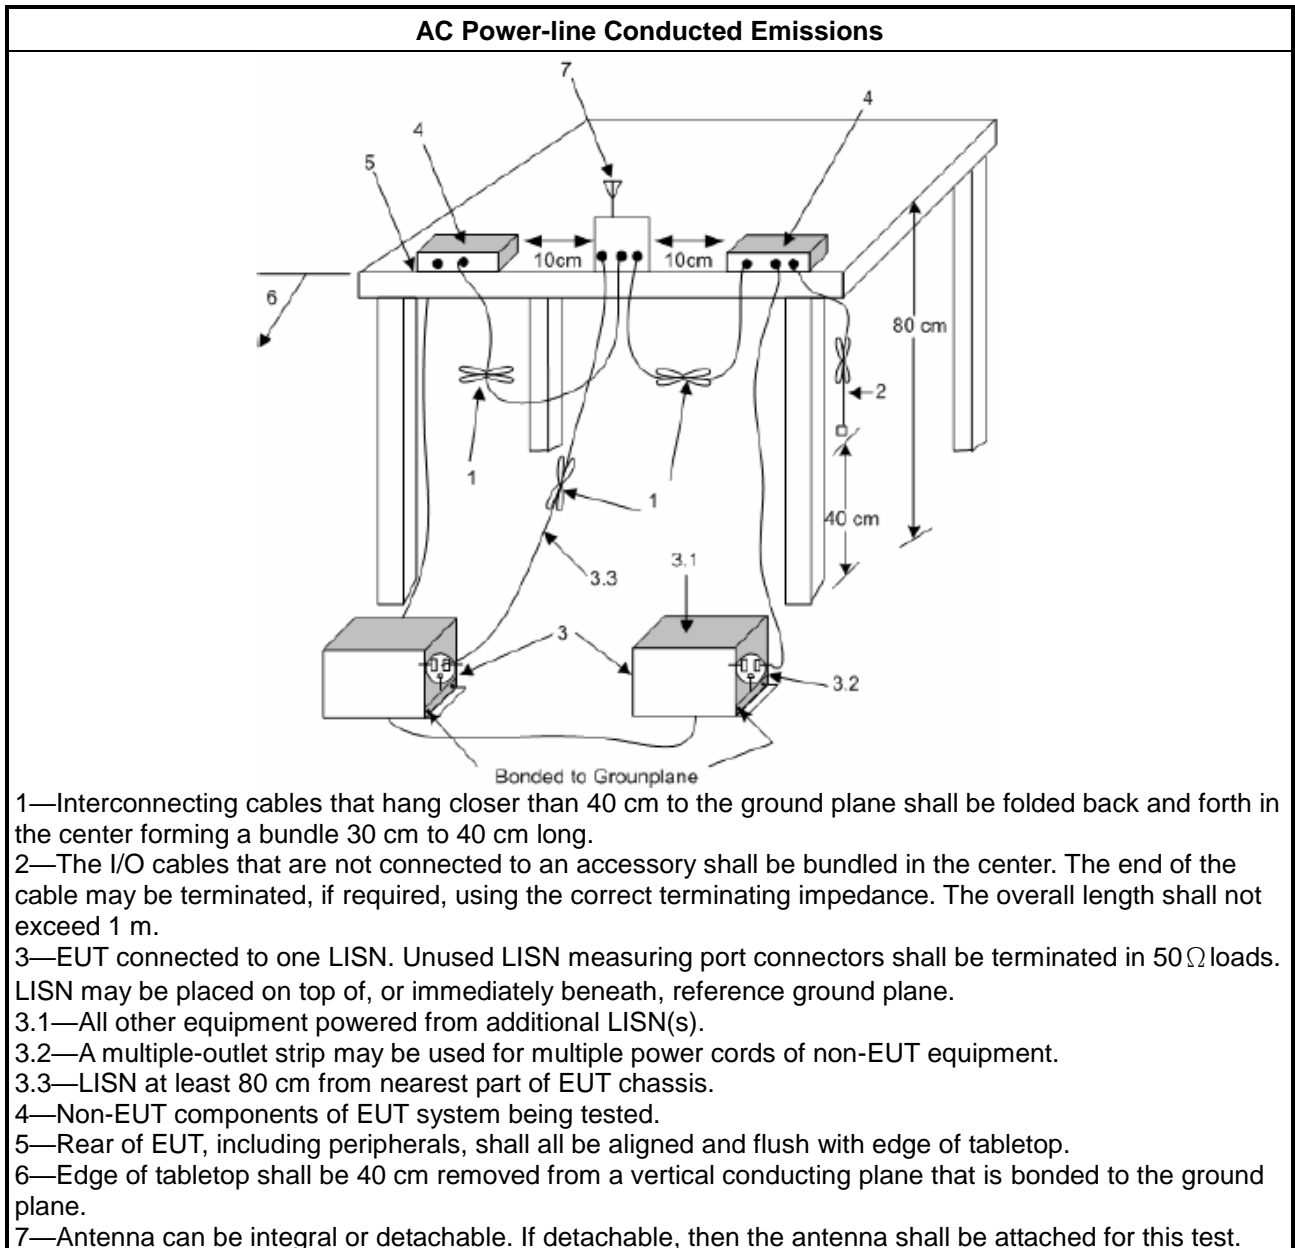

### 3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

### 3.2 DTS Bandwidth

#### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth $\geq$ 500 kHz.


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as KDB 558074, clause 8.2 (11.8 of ANSI C63.10) DTS bandwidth measurement.
<input type="checkbox"/>	Refer as RSS-Gen, clause 6.7 for occupied bandwidth testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

#### 3.2.4 Test Setup

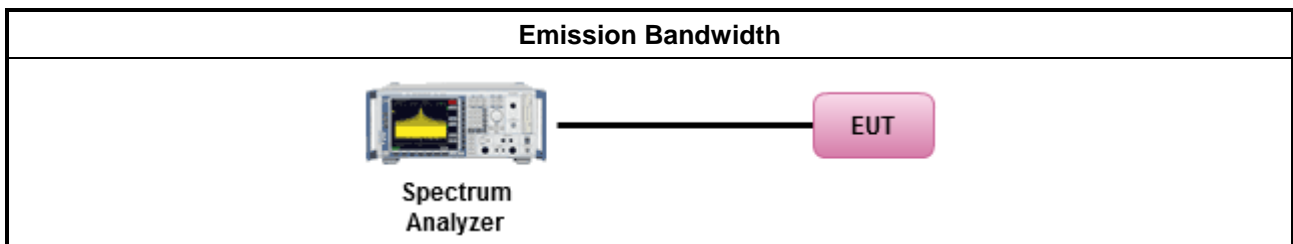

#### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"> <li>▪ If <math>G_{TX} \leq 6</math> dBi, then <math>P_{Out} \leq 30</math> dBm (1 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS):</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3 + 8</math> dB dBm</li> </ul>
e.i.r.p. Power Limit:	
	<ul style="list-style-type: none"> <li>▪ 2400-2483.5 MHz Band</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): <math>P_{eirp} \leq 36</math> dBm (4 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): <math>P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS)</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: <math>P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: <math>P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: <math>P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])</math> dBm</li> </ul>
$P_{Out}$ = maximum peak conducted output power or maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi.	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>▪ Maximum Peak Conducted Output Power</li> </ul>	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.1 (11.9.1.1 of ANSI C63.10) RBW ≥ EBW method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.2 (11.9.1.2 of ANSI C63.10) integrated band power method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.3 (11.9.1.3 of ANSI C63.10) peak power meter.
<ul style="list-style-type: none"> <li>▪ Maximum Average Conducted Output Power</li> </ul>	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.2 (11.9.2.2 of ANSI C63.10) using a spectrum analyzer.
<input checked="" type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.3 (11.9.2.3 of ANSI C63.10) using a power meter.
<ul style="list-style-type: none"> <li>▪ For conducted measurement.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ If multiple transmit chains, EIRP calculation could be following as methods:  <math>P_{total} = P_1 + P_2 + \dots + P_n</math>                      (calculated in linear unit [mW] and transfer to log unit [dBm])  <math>EIRP_{total} = P_{total} + DG</math> </li> </ul>	

### 3.3.4 Test Setup

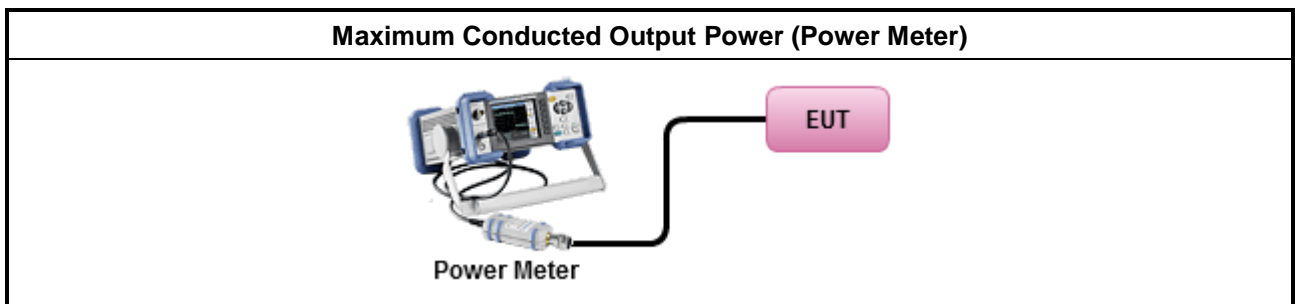

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> <li>Power Spectral Density (PSD) ≤ 8 dBm/3kHz</li> </ul>


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method	
	<ul style="list-style-type: none"> <li>Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).</li> </ul>
<input checked="" type="checkbox"/>	Refer as KDB 558074, clause 8.4 (11.10 of ANSI C63.10) Max. PSD.
	<ul style="list-style-type: none"> <li>For conducted measurement.               <ul style="list-style-type: none"> <li>If The EUT supports multiple transmit chains using options given below:                   <ul style="list-style-type: none"> <li>Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.</li> </ul> </li> </ul> </li> </ul>

#### 3.4.4 Test Setup

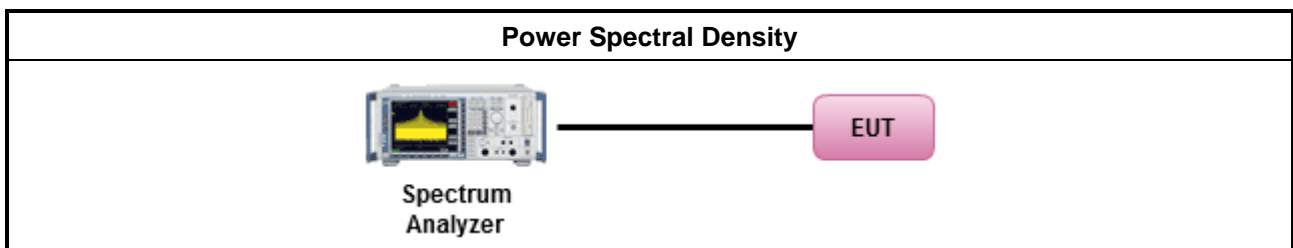

#### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

### 3.5 Emissions in Non-restricted Frequency Bands

#### 3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average level.


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as KDB 558074, clause 8.5 (11.11 of ANSI C63.10) for non-restricted frequency bands.</li> </ul>

#### 3.5.4 Test Setup

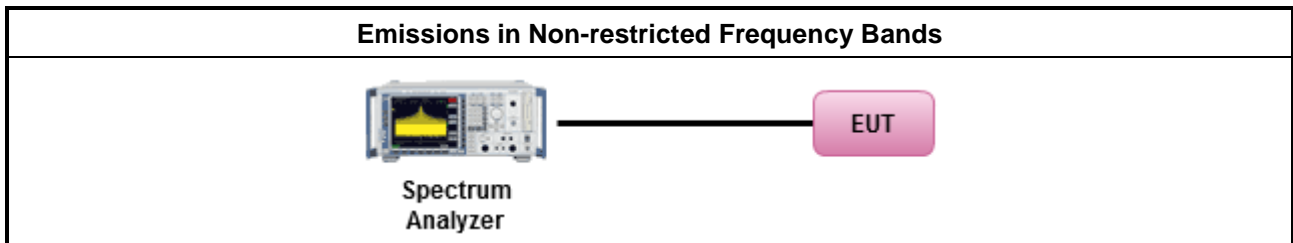

#### 3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

### 3.6 Emissions in Restricted Frequency Bands

#### 3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

#### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.



**3.6.3 Test Procedures**


<b>Test Method</b>	
	<ul style="list-style-type: none"> <li>▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ For the transmitter unwanted emissions shall be measured using following options below:</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as KDB 558074, clause 8.6 (11.12 of ANSI C63.10) for restricted frequency bands.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ For the transmitter band-edge emissions shall be measured using following options below:</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as KDB 558074 clause 8.7.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as KDB 558074, clause 8.7.2 (6.10.6 of ANSI C63.10) for marker-delta method for band-edge measurements.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as KDB 558074, clause 8.7.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Use the following spectrum analyzer settings:</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Set RBW=100 kHz for f &lt; 1 GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Set RBW = 1 MHz, VBW= 3MHz for f ≥ 1 GHz for peak measurement. For average measurement, refer as 1.1.4.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Based on FCC 15.31(f)(2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.</li> </ul>


**3.6.4 Measurement Results Calculation**

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamp Factor)

### 3.6.5 Test Setup

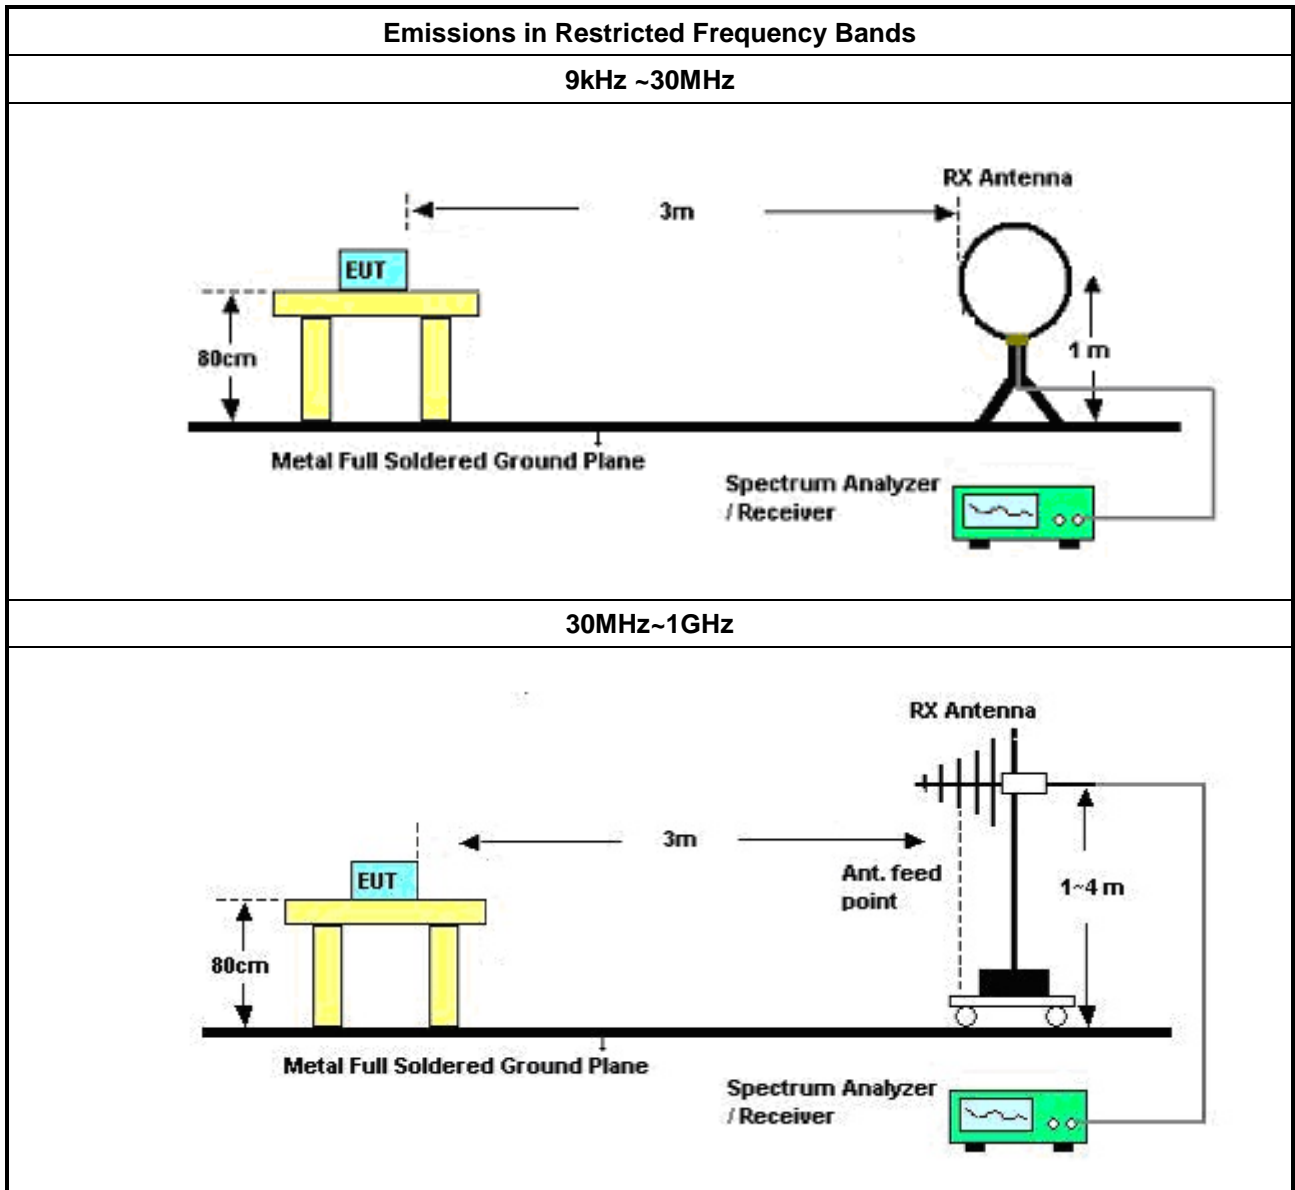

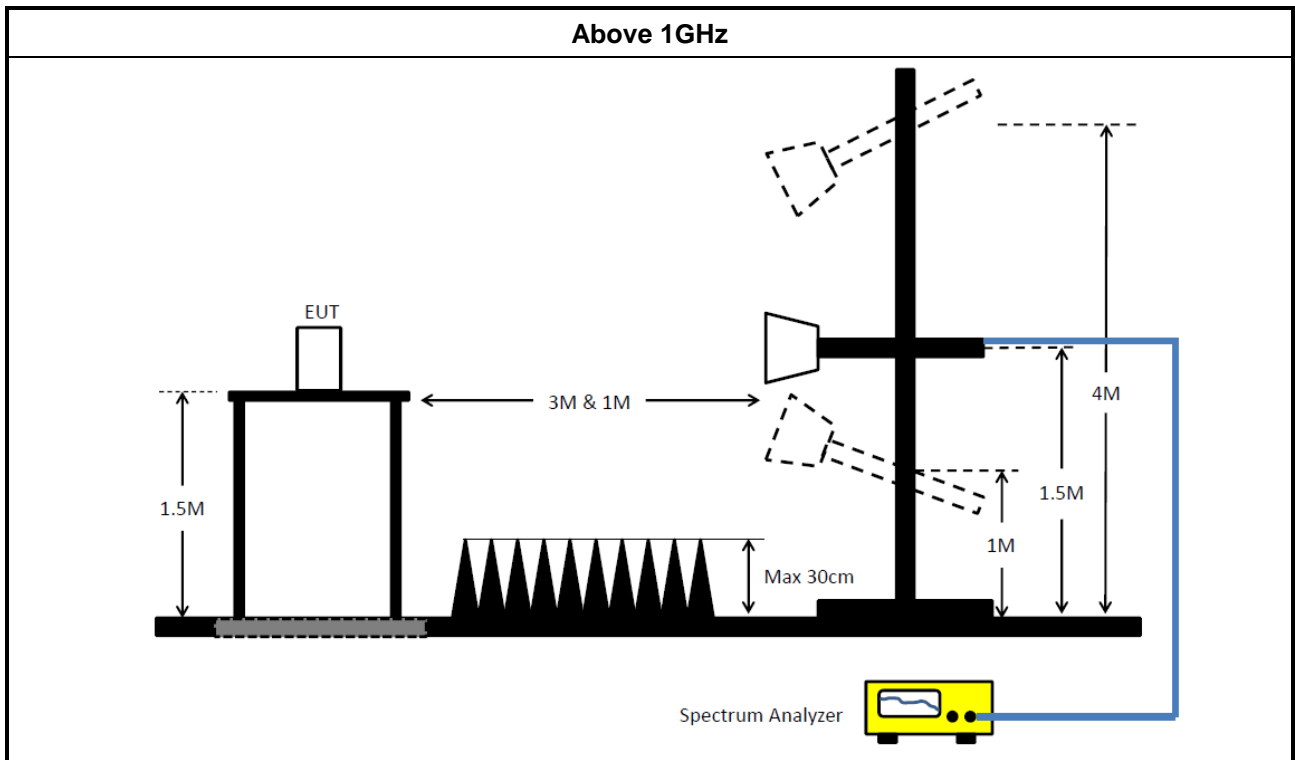

### 3.6.6 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



## 4 Test Equipment and Calibration Data

### Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR	102051	9kHz ~ 3.6GHz	16/May/2023	15/May/2024
Two-Line V-Network	R&S	ENV 216	101295	9kHz ~ 30MHz	05/Feb/2024	04/Feb/2025
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	27/Feb/2024	26/Feb/2025
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9kHz ~ 30MHz	18/Oct/2023	17/Oct/2024
Software	Sporton	SENSE-EMI	V5.11.3	-	NCR	NCR

NCR: No Calibration Required

### Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101515	9kHz~40GHz	14/Feb/2023	13/Feb/2024
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	20/Oct/2023	19/Oct/2024
Pulse Sensor	Anritsu	MA2411B	1339407	300MHz~40GHz	14/Dec/2022	13/Dec/2023
Power Meter	Anritsu	ML2495A	1517010	300MHz~40GHz	14/Dec/2022	13/Dec/2023
SENSE-15247_FS	Sporton	V5.11.2	N/A	N/A	N/A	N/A



Instrument for Radiated Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz~1GHz 3m	29/Jul/2023	28/Jul/2024
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	1GHz~18GHz 3m	28/Jul/2023	27/Jul/2024
EMI Test Receiver	R&S	ESR	102052	9kHz~3.6GHz	26/May/2023	25/May/2024
Signal Analyzer	R&S	FSP 40	100593	9kHz~40GHz	17/Mar/2023	16/Mar/2024
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	23/Mar/2023	22/Mar/2024
Bilog Antenna & 5dB Attenuator	SCHAFFNER / MTJ	CBL 6112B / MTJ6102-05	2723/2	30MHz~1GHz	27/Aug/2023	26/Aug/2024
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02268	1GHz~18GHz	23/Sep/2023	22/Sep/2024
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	21/Aug/2023	20/Aug/2024
RF Cable	MVE	400LL+SN 200207	03CH02-cable-02	9kHz~30MHz	19/Dec/2023	18/Dec/2024
RF Cable	MVE	400LL+SN 200207	03CH02-cable-02	30MHz~1GHz	19/Dec/2023	18/Dec/2024
RF Cable-R03m	HUBER+SUHNE R	SUCOFLEX104	03CH02-cable-01	1GHz~40GHz	10/Feb/2023	09/Feb/2024
Amplifier	Agilent	8447D	2944A11149	100kHz~1.3GHz	27/Jun/2023	26/Jun/2024
Microwave Preampfier	Agilent	8449B	3008A02373	1GHz~26.5GHz	24/Oct/2023	23/Oct/2024
Amplifier	EM	EM18G40GA	060874	18GHz ~40GHz	18/Aug/2023	17/Aug/2024
SENSE-15247_FS	Sporton	V5.11.12	N/A	N/A	N/A	N/A

Instrument for Radiated Test\_Co-location

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	1GHz~18GHz 3m	28/Jul/2023	27/Jul/2024
Signal Analyzer	R&S	FSP 40	100593	9kHz~40GHz	17/Mar/2023	16/Mar/2024
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02268	1GHz~18GHz	23/Sep/2023	22/Sep/2024
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	21/Aug/2023	20/Aug/2024
RF Cable-R03m	HUBER+SUHNER	SUCOFLEX 104	03CH02-cable-01	1GHz~40GHz	15/Feb/2024	14/Feb/2025
Microwave Preampfier	Agilent	8449B	3008A02373	1GHz~26.5GHz	24/Oct/2023	23/Oct/2024
Microwave Preampfier	EM	EM18G40GA	060604	18GHz ~40GHz	16/Mar/2023	15/Mar/2024
SENSE-15407_NII	Sporton	V5.11.6	N/A	N/A	N/A	N/A



**Summary**


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	2.066M	38.11	46.00	-7.89	Neutral



Result


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition	Comments
Mode 1	Pass	QP	163.117k	44.42	65.31	-20.89	Line	-
Mode 1	Pass	AV	163.117k	31.27	55.31	-24.04	Line	-
Mode 1	Pass	QP	426.898k	45.06	57.32	-12.26	Line	-
Mode 1	Pass	AV	426.898k	37.75	47.32	-9.57	Line	-
Mode 1	Pass	QP	818.313k	37.97	56.00	-18.03	Line	-
Mode 1	Pass	AV	818.313k	31.33	46.00	-14.67	Line	-
Mode 1	Pass	QP	2.185M	46.54	56.00	-9.46	Line	-
Mode 1	Pass	AV	2.185M	37.37	46.00	-8.63	Line	-
Mode 1	Pass	QP	2.667M	41.49	56.00	-14.51	Line	-
Mode 1	Pass	AV	2.667M	32.79	46.00	-13.21	Line	-
Mode 1	Pass	QP	21.348M	40.06	60.00	-19.94	Line	-
Mode 1	Pass	AV	21.348M	33.73	50.00	-16.27	Line	-
Mode 1	Pass	QP	161.175k	43.74	65.41	-21.67	Neutral	-
Mode 1	Pass	AV	161.175k	31.63	55.41	-23.78	Neutral	-
Mode 1	Pass	QP	423.503k	45.14	57.38	-12.24	Neutral	-
Mode 1	Pass	AV	423.503k	37.33	47.38	-10.05	Neutral	-
Mode 1	Pass	QP	808.571k	37.93	56.00	-18.07	Neutral	-
Mode 1	Pass	AV	808.571k	31.43	46.00	-14.57	Neutral	-
Mode 1	Pass	QP	1.692M	43.44	56.00	-12.56	Neutral	-
Mode 1	Pass	AV	1.692M	35.77	46.00	-10.23	Neutral	-
Mode 1	Pass	QP	2.066M	46.08	56.00	-9.92	Neutral	-
Mode 1	Pass	AV	2.066M	38.11	46.00	-7.89	Neutral	-
Mode 1	Pass	QP	21.519M	39.60	60.00	-20.40	Neutral	-
Mode 1	Pass	AV	21.519M	33.14	50.00	-16.86	Neutral	-

## Conducted Emissions at Powerline\_Mode 1

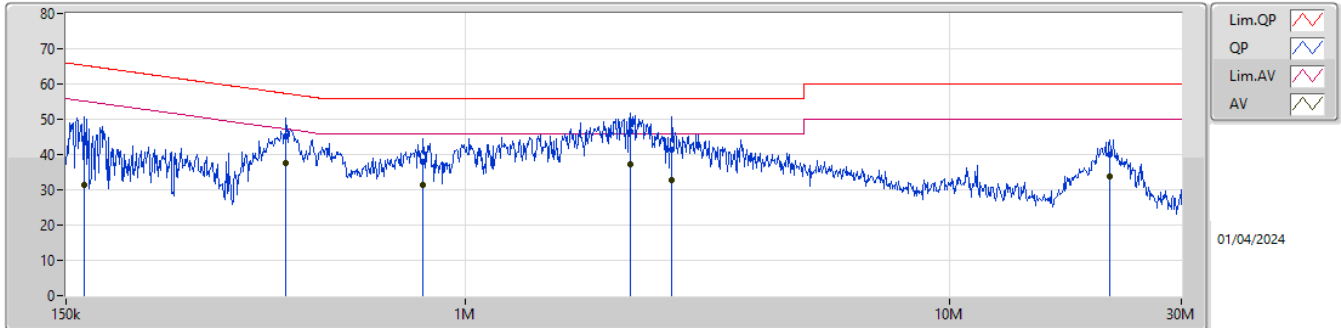

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	163.117k	44.42	65.31	-20.89	19.42	Line	-	25.00	9.61	0.07	9.74
AV	163.117k	31.27	55.31	-24.04	19.42	Line	-	11.85	9.61	0.07	9.74
QP	426.898k	45.06	57.32	-12.26	19.49	Line	-	25.57	9.61	0.12	9.76
AV	426.898k	37.75	47.32	-9.57	19.49	Line	-	18.26	9.61	0.12	9.76
QP	818.313k	37.97	56.00	-18.03	19.50	Line	-	18.47	9.61	0.10	9.79
AV	818.313k	31.33	46.00	-14.67	19.50	Line	-	11.83	9.61	0.10	9.79
QP	2.185M	46.54	56.00	-9.46	19.52	Line	-	27.02	9.62	0.10	9.80
AV	2.185M	37.37	46.00	-8.63	19.52	Line	-	17.85	9.62	0.10	9.80
QP	2.667M	41.49	56.00	-14.51	19.52	Line	-	21.97	9.63	0.09	9.80
AV	2.667M	32.79	46.00	-13.21	19.52	Line	-	13.27	9.63	0.09	9.80
QP	21.348M	40.06	60.00	-19.94	19.54	Line	-	20.52	9.58	0.12	9.84
AV	21.348M	33.73	50.00	-16.27	19.54	Line	-	14.19	9.58	0.12	9.84

## Conducted Emissions at Powerline\_Mode 1

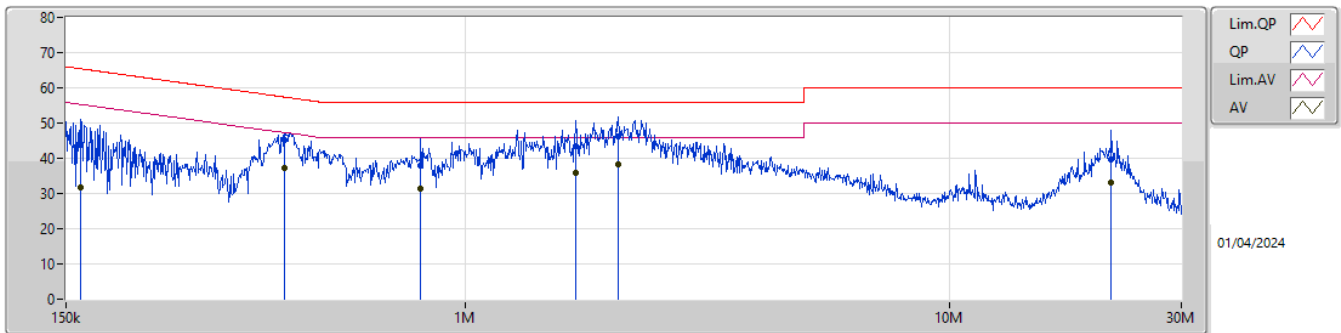

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	161.175k	43.74	65.41	-21.67	19.43	Neutral	-	24.31	9.62	0.07	9.74
AV	161.175k	31.63	55.41	-23.78	19.43	Neutral	-	12.20	9.62	0.07	9.74
QP	423.503k	45.14	57.38	-12.24	19.49	Neutral	-	25.65	9.61	0.12	9.76
AV	423.503k	37.33	47.38	-10.05	19.49	Neutral	-	17.84	9.61	0.12	9.76
QP	808.571k	37.93	56.00	-18.07	19.50	Neutral	-	18.43	9.61	0.10	9.79
AV	808.571k	31.43	46.00	-14.57	19.50	Neutral	-	11.93	9.61	0.10	9.79
QP	1.692M	43.44	56.00	-12.56	19.53	Neutral	-	23.91	9.62	0.11	9.80
AV	1.692M	35.77	46.00	-10.23	19.53	Neutral	-	16.24	9.62	0.11	9.80
QP	2.066M	46.08	56.00	-9.92	19.53	Neutral	-	26.55	9.62	0.11	9.80
AV	2.066M	38.11	46.00	-7.89	19.53	Neutral	-	18.58	9.62	0.11	9.80
QP	21.519M	39.60	60.00	-20.40	19.65	Neutral	-	19.95	9.69	0.12	9.84
AV	21.519M	33.14	50.00	-16.86	19.65	Neutral	-	13.49	9.69	0.12	9.84





**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	638.75k	1.041M	1M04F1D	633.75k	1.037M
BT-LE(2Mbps)	1.115M	2.114M	2M11F1D	1.105M	2.101M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;  
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	633.75k	1.041M
2440MHz	Pass	500k	635k	1.037M
2480MHz	Pass	500k	638.75k	1.037M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.105M	2.101M
2440MHz	Pass	500k	1.115M	2.106M
2480MHz	Pass	500k	1.113M	2.114M



Port X-N dB = Port X 6dB down bandwidth;  
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz\_BT-LE(1Mbps)

EBW-DTS

2480MHz

21/11/2023

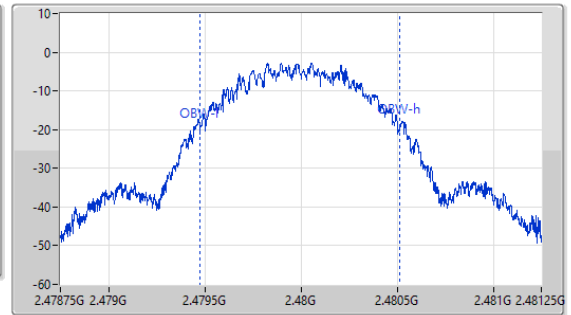
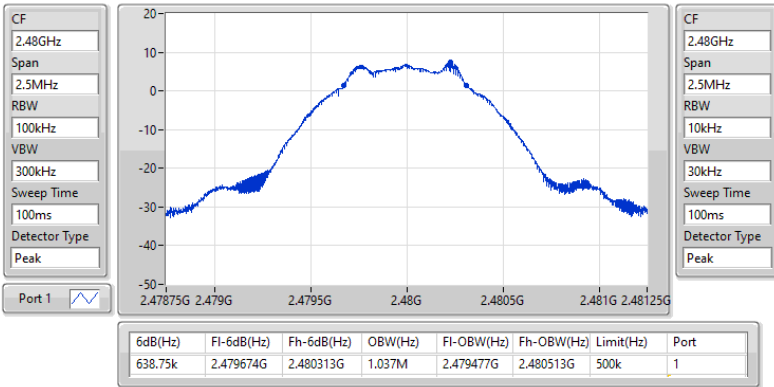


2.4-2.4835GHz\_BT-LE(2Mbps)

EBW-DTS

2440MHz

21/11/2023

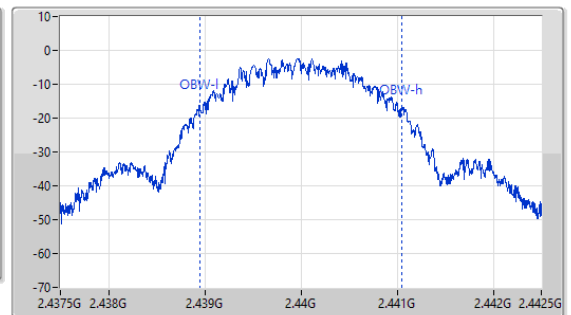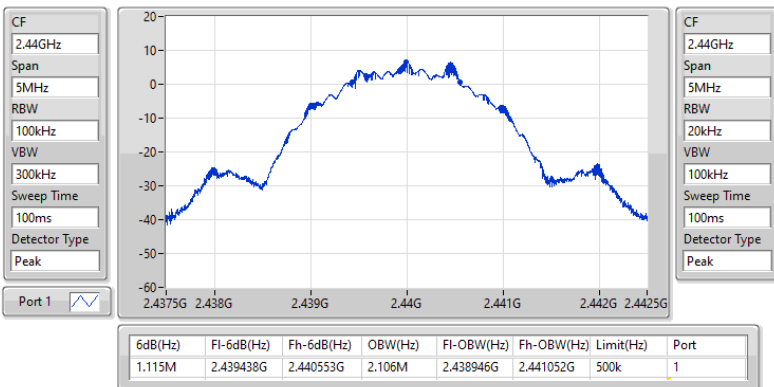



**Summary**

Mode	Total Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	7.45	0.00556
BT-LE(2Mbps)	7.39	0.00548



**Result**

Mode	Result	DG (dBi)	Total Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	4.71	7.37	30.00
2440MHz	Pass	4.71	7.36	30.00
2480MHz	Pass	4.71	7.45	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	4.71	7.19	30.00
2440MHz	Pass	4.71	7.29	30.00
2480MHz	Pass	4.71	7.39	30.00

DG = Directional Gain; Port X = Port X output power



**Summary**

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-8.46
BT-LE(2Mbps)	-9.92


RBW = 3kHz;



Result

Mode	Result	DG (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	4.71	-8.61	8.00
2440MHz	Pass	4.71	-8.47	8.00
2480MHz	Pass	4.71	-8.46	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	4.71	-10.05	8.00
2440MHz	Pass	4.71	-9.96	8.00
2480MHz	Pass	4.71	-9.92	8.00

DG = Directional Gain; RBW = 3kHz;  
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

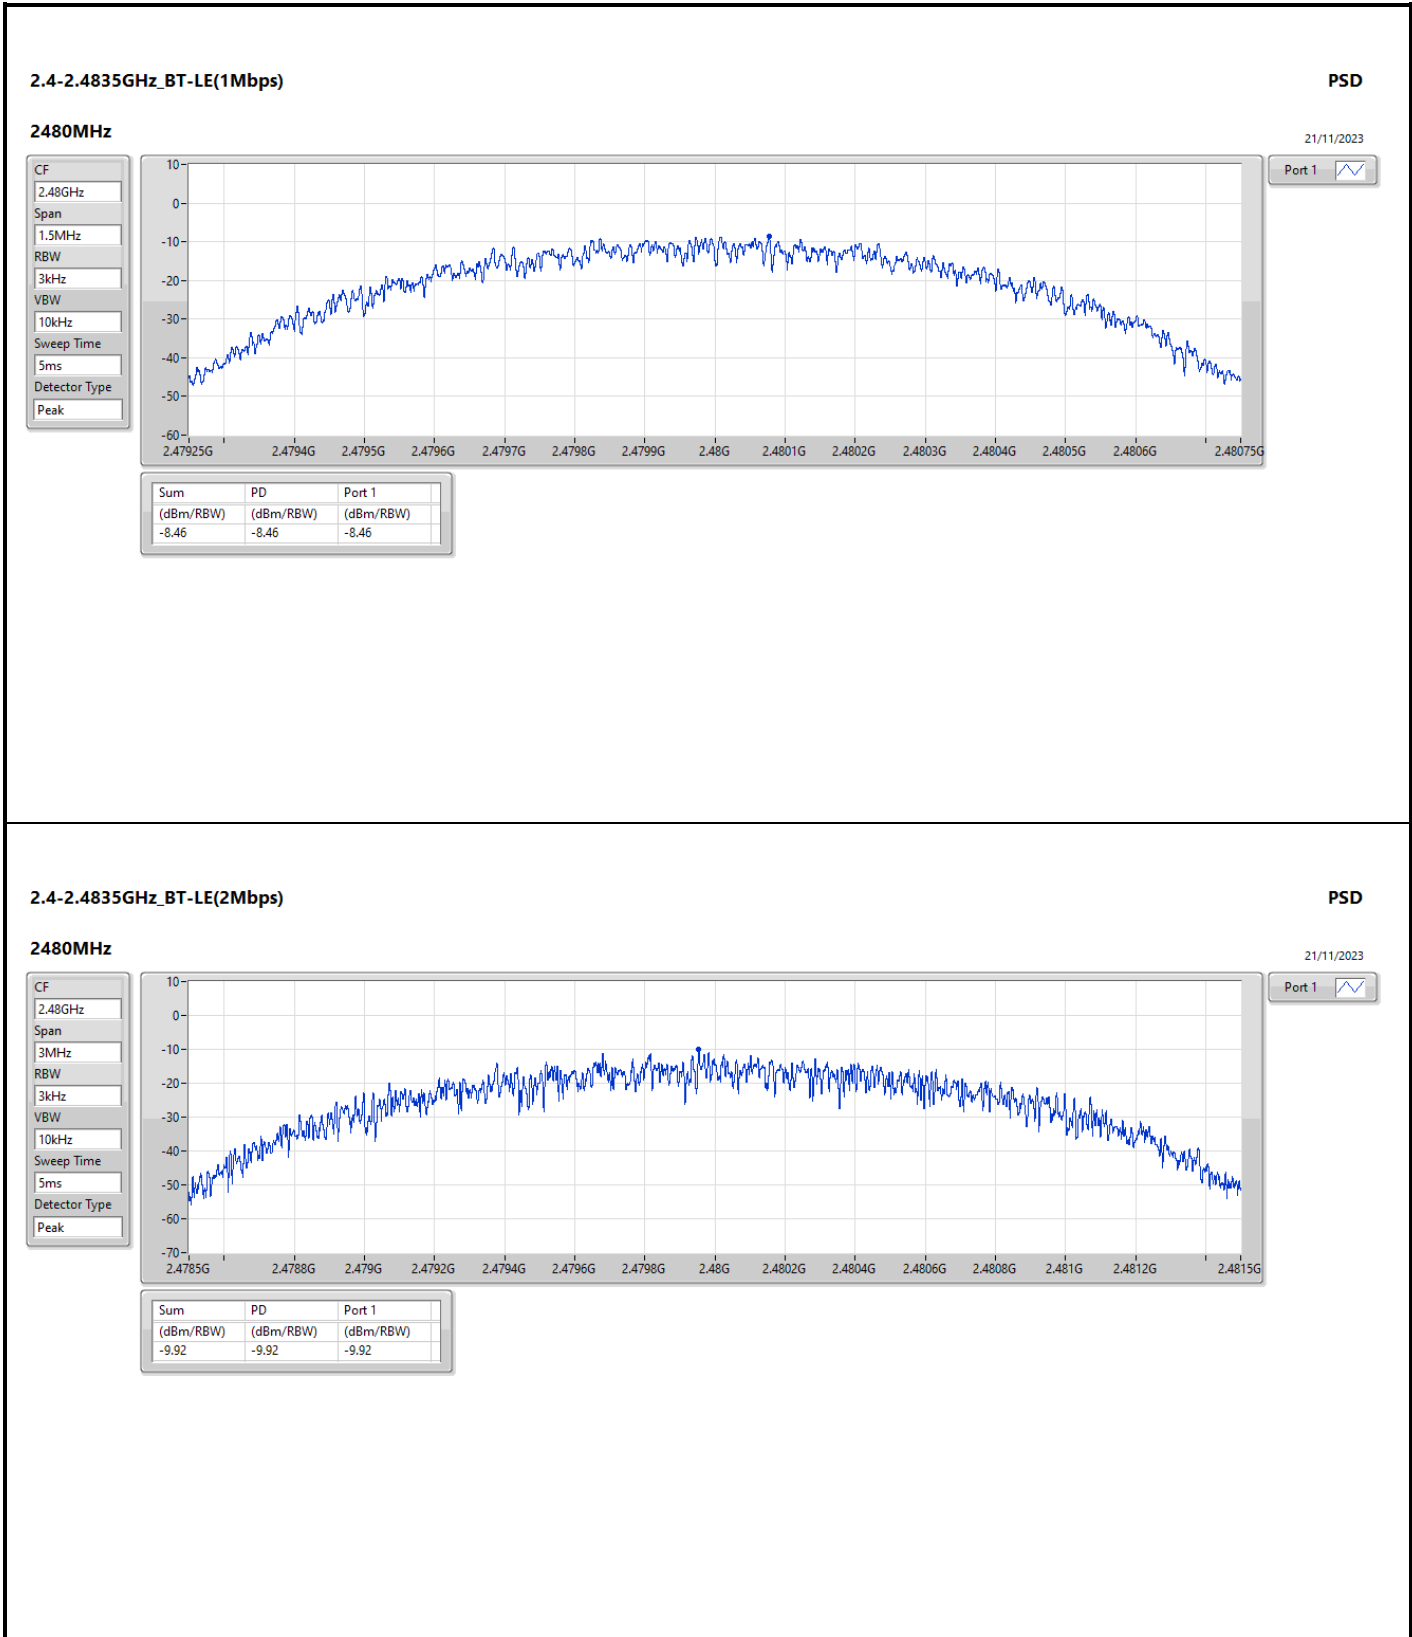







Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.48033G	7.23	-22.77	2.30245G	-54.27	2.4G	-35.44	2.4G	-34.50	2.5023G	-52.87	21.5721G	-42.91	1
BT-LE(2Mbps)	Pass	2.48016G	6.32	-23.68	2.1685G	-54.34	2.4G	-24.86	2.4G	-24.95	2.50282G	-52.39	16.55819G	-42.46	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.48033G	7.23	-22.77	2.30245G	-54.27	2.4G	-35.44	2.4G	-34.50	2.5023G	-52.87	21.5721G	-42.91	1
2440MHz	Pass	2.48033G	7.23	-22.77	2.15088G	-54.82	2.3974G	-53.63	2.4G	-54.38	2.50118G	-53.71	17.04749G	-42.72	1
2480MHz	Pass	2.48033G	7.23	-22.77	2.3048G	-54.16	2.39356G	-52.99	2.4G	-55.31	2.50002G	-49.94	23.23684G	-42.50	1
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.48016G	6.32	-23.68	2.1685G	-54.34	2.4G	-24.86	2.4G	-24.95	2.50282G	-52.39	16.55819G	-42.46	1
2440MHz	Pass	2.48016G	6.32	-23.68	2.30128G	-55.00	2.39672G	-52.57	2.4G	-54.44	2.5023G	-52.31	16.561G	-42.20	1
2480MHz	Pass	2.48016G	6.32	-23.68	2.0792G	-54.76	2.39744G	-53.28	2.4G	-55.48	2.50022G	-49.51	16.63974G	-42.53	1

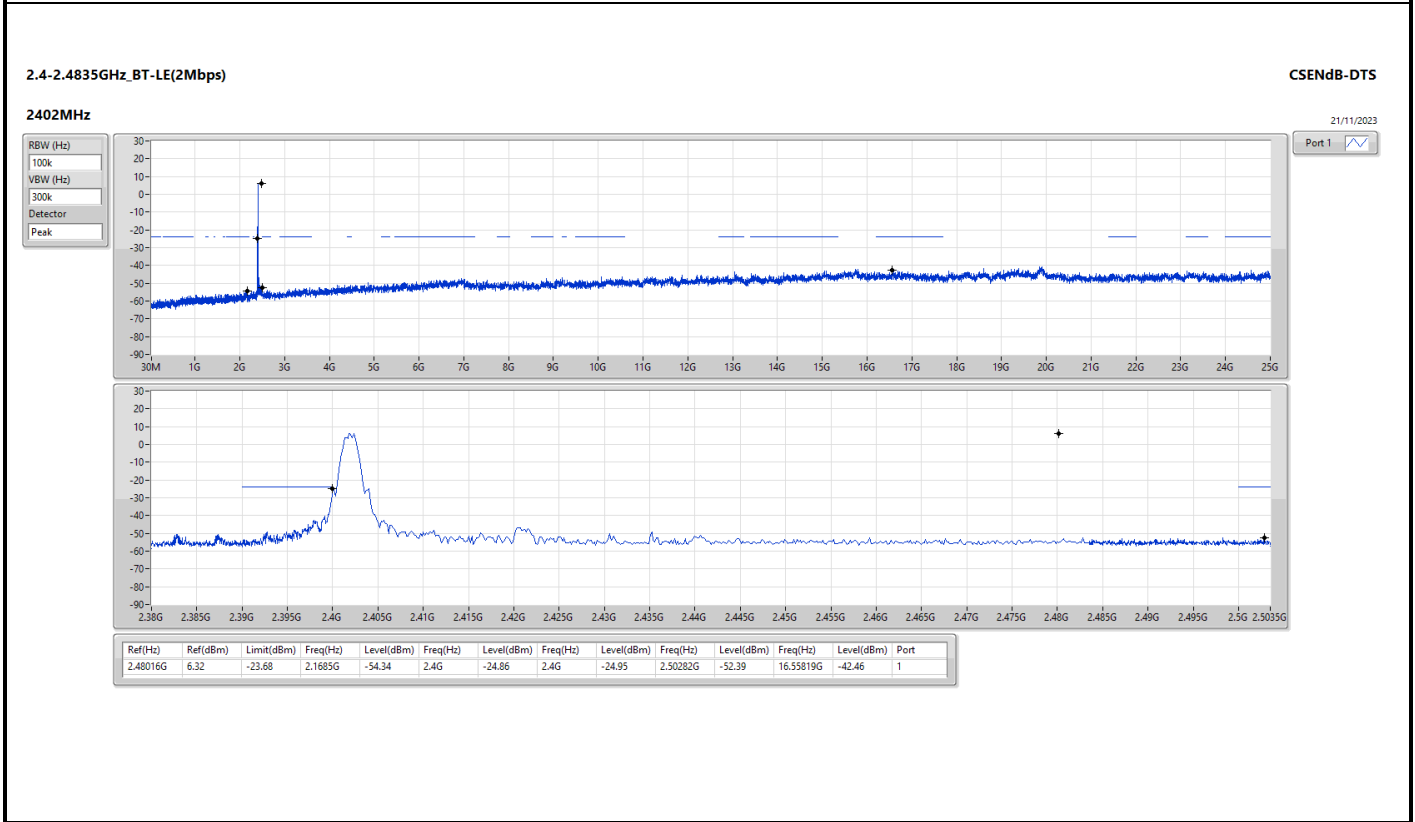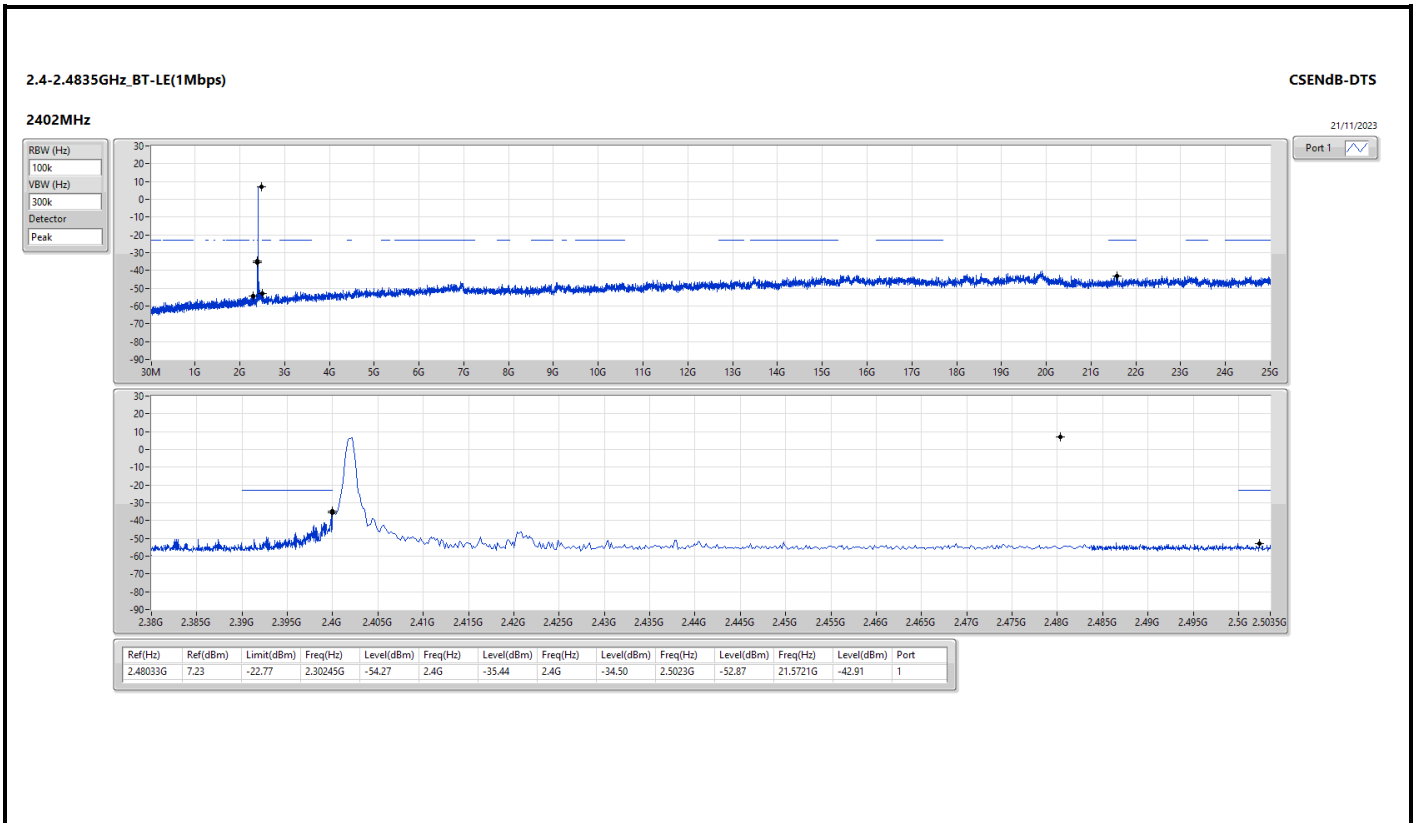



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-
BT-LE(2Mbps)	Pass	PK	303.54M	42.52	46.00	-3.48	3	Horizontal	0	1.00




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-
2440MHz	Pass	PK	30M	34.44	40.00	-5.56	3	Vertical	360	1.00
2440MHz	Pass	PK	51.34M	31.11	40.00	-8.89	3	Vertical	360	1.00
2440MHz	Pass	PK	253.1M	25.11	46.00	-20.89	3	Vertical	360	1.00
2440MHz	Pass	PK	303.54M	37.91	46.00	-8.09	3	Vertical	360	1.00
2440MHz	Pass	PK	476.2M	30.51	46.00	-15.49	3	Vertical	360	1.00
2440MHz	Pass	PK	724.52M	34.09	46.00	-11.91	3	Vertical	360	1.00
2440MHz	Pass	PK	33.88M	33.30	40.00	-6.70	3	Horizontal	0	1.00
2440MHz	Pass	PK	82.38M	29.22	40.00	-10.78	3	Horizontal	0	1.00
2440MHz	Pass	PK	303.54M	42.52	46.00	-3.48	3	Horizontal	0	1.00
2440MHz	Pass	PK	464.56M	32.17	46.00	-13.83	3	Horizontal	0	1.00
2440MHz	Pass	PK	584.84M	32.32	46.00	-13.68	3	Horizontal	0	1.00
2440MHz	Pass	PK	699.3M	36.62	46.00	-9.38	3	Horizontal	0	1.00

2.4-2.4835GHz\_BT-LE(2Mbps)


2440MHz\_PoE

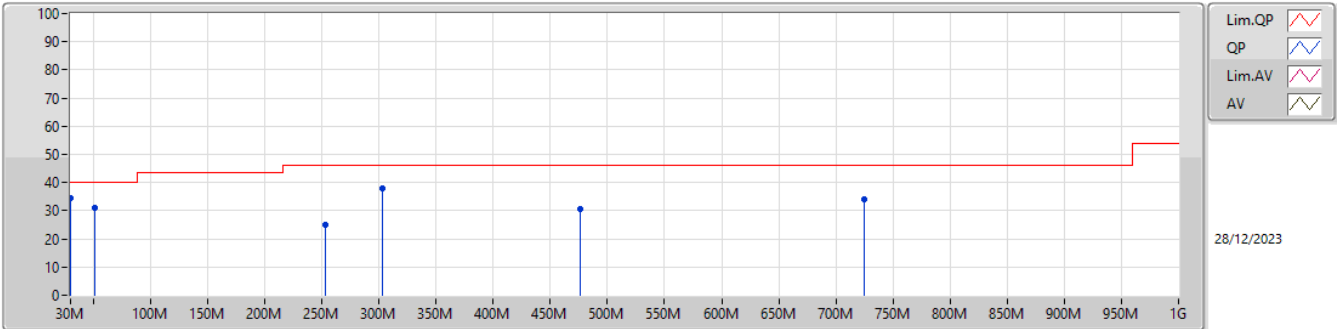

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	30M	34.44	40.00	-5.56	-3.19	3	Vertical	360	1.00	37.63	22.98	1.23	27.40
PK	51.34M	31.11	40.00	-8.89	-12.28	3	Vertical	360	1.00	43.39	13.15	1.55	26.98
PK	253.1M	25.11	46.00	-20.89	-6.03	3	Vertical	360	1.00	31.14	17.93	3.26	27.22
PK	303.54M	37.91	46.00	-8.09	-5.23	3	Vertical	360	1.00	43.14	18.40	3.67	27.30
PK	476.2M	30.51	46.00	-15.49	-1.09	3	Vertical	360	1.00	31.60	22.54	4.74	28.37
PK	724.52M	34.09	46.00	-11.91	1.99	3	Vertical	360	1.00	32.10	24.32	6.03	28.36

2.4-2.4835GHz\_BT-LE(2Mbps)

2440MHz\_PoE

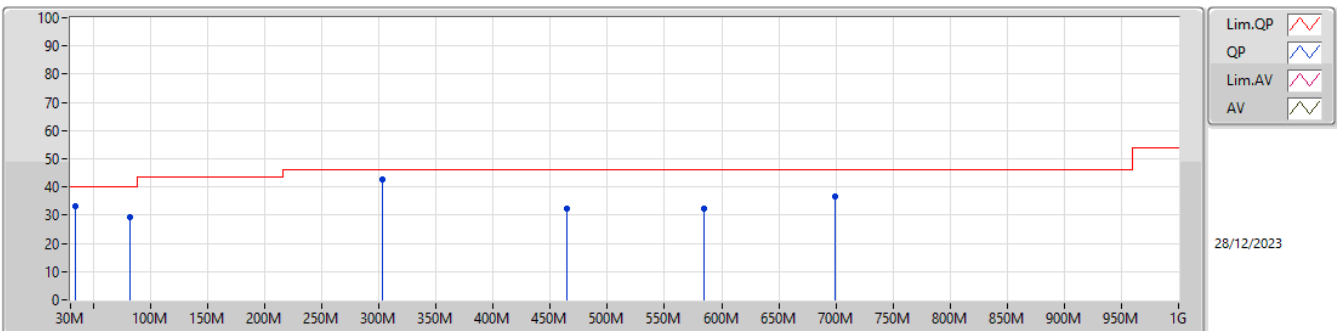

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	33.88M	33.30	40.00	-6.70	-4.92	3	Horizontal	0	1.00	38.22	20.88	1.28	27.08
PK	82.38M	29.22	40.00	-10.78	-13.49	3	Horizontal	0	1.00	42.71	12.50	1.80	27.79
PK	303.54M	42.52	46.00	-3.48	-5.23	3	Horizontal	0	1.00	47.75	18.40	3.67	27.30
PK	464.56M	32.17	46.00	-13.83	-1.37	3	Horizontal	0	1.00	33.54	22.31	4.67	28.35
PK	584.84M	32.32	46.00	-13.68	1.01	3	Horizontal	0	1.00	31.31	23.96	5.60	28.55
PK	699.3M	36.62	46.00	-9.38	1.49	3	Horizontal	0	1.00	35.13	23.93	5.95	28.39



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	2.4835G	70.66	74.00	-3.34	3	Vertical	207	1.83
BT-LE(2Mbps)	Pass	PK	2.4835G	70.76	74.00	-3.24	3	Vertical	206	1.84



Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.3634G	44.95	54.00	-9.05	3	Vertical	209	1.67
2402MHz	Pass	AV	2.402G	103.76	Inf	-Inf	3	Vertical	209	1.67
2402MHz	Pass	PK	2.3876G	60.20	74.00	-13.80	3	Vertical	209	1.67
2402MHz	Pass	PK	2.402G	104.86	Inf	-Inf	3	Vertical	209	1.67
2402MHz	Pass	AV	4.80397G	36.80	54.00	-17.20	3	Vertical	340	2.35
2402MHz	Pass	PK	4.80353G	45.74	74.00	-28.26	3	Vertical	340	2.35
2402MHz	Pass	AV	4.80393G	32.60	54.00	-21.40	3	Horizontal	11	1.70
2402MHz	Pass	PK	4.80437G	44.19	74.00	-29.81	3	Horizontal	11	1.70
2440MHz	Pass	AV	2.3812G	44.54	54.00	-9.46	3	Vertical	190	1.54
2440MHz	Pass	AV	2.44G	104.21	Inf	-Inf	3	Vertical	190	1.54
2440MHz	Pass	AV	2.4936G	44.91	54.00	-9.09	3	Vertical	190	1.54
2440MHz	Pass	PK	2.382G	58.31	74.00	-15.69	3	Vertical	190	1.54
2440MHz	Pass	PK	2.44G	105.39	Inf	-Inf	3	Vertical	190	1.54
2440MHz	Pass	PK	2.4872G	59.42	74.00	-14.58	3	Vertical	190	1.54
2440MHz	Pass	AV	4.87999G	31.17	54.00	-22.83	3	Vertical	348	1.23
2440MHz	Pass	AV	7.32052G	36.54	54.00	-17.46	3	Vertical	349	1.53
2440MHz	Pass	PK	4.88065G	43.36	74.00	-30.64	3	Vertical	348	1.23
2440MHz	Pass	PK	7.32046G	48.91	74.00	-25.09	3	Vertical	349	1.53
2440MHz	Pass	AV	4.88015G	30.33	54.00	-23.67	3	Horizontal	323	1.50
2440MHz	Pass	AV	7.3206G	36.74	54.00	-17.26	3	Horizontal	29	1.69
2440MHz	Pass	PK	4.88051G	42.80	74.00	-31.20	3	Horizontal	323	1.50
2440MHz	Pass	PK	7.31938G	49.35	74.00	-24.65	3	Horizontal	29	1.69
2480MHz	Pass	AV	2.48G	104.05	Inf	-Inf	3	Vertical	207	1.83
2480MHz	Pass	AV	2.4835G	47.33	54.00	-6.67	3	Vertical	207	1.83
2480MHz	Pass	PK	2.48G	105.25	Inf	-Inf	3	Vertical	207	1.83
2480MHz	Pass	PK	2.4835G	70.66	74.00	-3.34	3	Vertical	207	1.83
2480MHz	Pass	AV	4.9599G	30.73	54.00	-23.27	3	Vertical	30	2.04
2480MHz	Pass	AV	7.44063G	36.69	54.00	-17.31	3	Vertical	347	1.50
2480MHz	Pass	PK	4.96052G	43.38	74.00	-30.62	3	Vertical	30	2.04
2480MHz	Pass	PK	7.43935G	49.63	74.00	-24.37	3	Vertical	347	1.50
2480MHz	Pass	AV	4.95987G	30.83	54.00	-23.17	3	Horizontal	320	2.54
2480MHz	Pass	AV	7.44068G	35.89	54.00	-18.11	3	Horizontal	22	1.00
2480MHz	Pass	PK	4.96041G	43.63	74.00	-30.37	3	Horizontal	22	2.54
2480MHz	Pass	PK	7.44051G	49.02	74.00	-24.98	3	Horizontal	320	1.00
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.363G	44.79	54.00	-9.21	3	Vertical	207	1.67
2402MHz	Pass	AV	2.402G	101.78	Inf	-Inf	3	Vertical	207	1.67
2402MHz	Pass	PK	2.3872G	61.61	74.00	-12.39	3	Vertical	207	1.67
2402MHz	Pass	PK	2.402G	104.88	Inf	-Inf	3	Vertical	207	1.67
2402MHz	Pass	AV	4.80481G	33.58	54.00	-20.42	3	Vertical	347	2.67
2402MHz	Pass	PK	4.80295G	44.92	74.00	-29.08	3	Vertical	347	2.67
2402MHz	Pass	AV	4.80296G	30.89	54.00	-23.11	3	Horizontal	21	1.77
2402MHz	Pass	PK	4.80299G	43.98	74.00	-30.02	3	Horizontal	21	1.77
2440MHz	Pass	AV	2.3612G	44.75	54.00	-9.25	3	Vertical	186	1.54
2440MHz	Pass	AV	2.44G	102.43	Inf	-Inf	3	Vertical	186	1.54
2440MHz	Pass	AV	2.4984G	44.85	54.00	-9.15	3	Vertical	186	1.54
2440MHz	Pass	PK	2.3816G	58.59	74.00	-15.41	3	Vertical	186	1.54
2440MHz	Pass	PK	2.44G	105.51	Inf	-Inf	3	Vertical	186	1.54
2440MHz	Pass	PK	2.4876G	58.88	74.00	-15.12	3	Vertical	186	1.54
2440MHz	Pass	AV	4.87914G	30.32	54.00	-23.68	3	Vertical	358	1.12
2440MHz	Pass	AV	7.32117G	36.02	54.00	-17.98	3	Vertical	356	1.51
2440MHz	Pass	PK	4.88126G	43.38	74.00	-30.62	3	Vertical	358	1.12
2440MHz	Pass	PK	7.3216G	49.47	74.00	-24.53	3	Vertical	356	1.51
2440MHz	Pass	AV	4.879G	29.65	54.00	-24.35	3	Horizontal	329	1.47
2440MHz	Pass	AV	7.32115G	35.88	54.00	-18.12	3	Horizontal	39	1.75
2440MHz	Pass	PK	4.87907G	42.87	74.00	-31.13	3	Horizontal	329	1.47
2440MHz	Pass	PK	7.32143G	48.71	74.00	-25.29	3	Horizontal	39	1.75
2480MHz	Pass	AV	2.48G	102.13	Inf	-Inf	3	Vertical	206	1.84
2480MHz	Pass	AV	2.4835G	50.24	54.00	-3.76	3	Vertical	206	1.84
2480MHz	Pass	PK	2.48G	105.22	Inf	-Inf	3	Vertical	206	1.84






Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2480MHz	Pass	PK	2.4835G	70.76	74.00	-3.24	3	Vertical	206	1.84
2480MHz	Pass	AV	4.96002G	29.48	54.00	-24.52	3	Vertical	4	1.95
2480MHz	Pass	AV	7.44129G	36.45	54.00	-17.55	3	Vertical	353	1.39
2480MHz	Pass	PK	4.95991G	43.05	74.00	-30.95	3	Vertical	4	1.95
2480MHz	Pass	PK	7.44144G	48.85	74.00	-25.15	3	Vertical	353	1.39
2480MHz	Pass	AV	4.95901G	29.34	54.00	-24.66	3	Horizontal	333	1.45
2480MHz	Pass	AV	7.43883G	35.67	54.00	-18.33	3	Horizontal	27	1.14
2480MHz	Pass	PK	4.95854G	42.94	74.00	-31.06	3	Horizontal	333	1.45
2480MHz	Pass	PK	7.44149G	48.13	74.00	-25.87	3	Horizontal	27	1.14

2.4-2.4835GHz\_BT-LE(1Mbps)


2480MHz\_TX

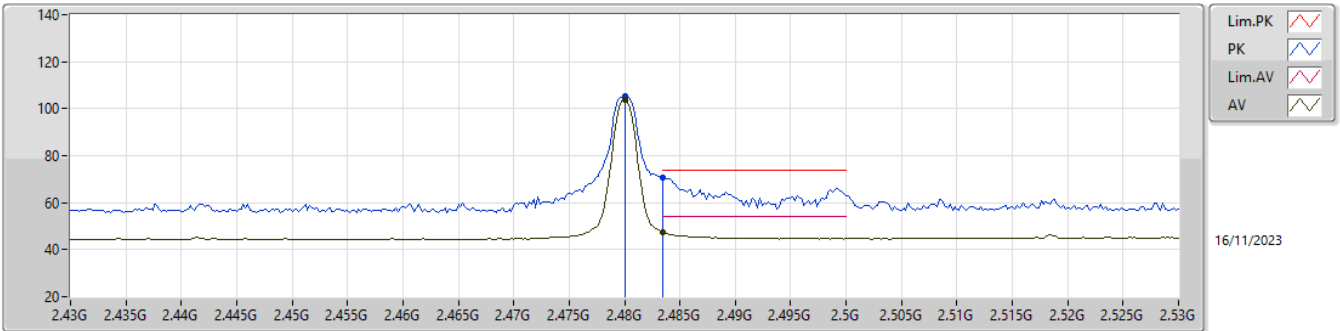

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	104.05	Inf	-Inf	31.81	3	Vertical	207	1.83	72.24	27.50	4.31	-
AV	2.4835G	47.33	54.00	-6.67	31.85	3	Vertical	207	1.83	15.48	27.54	4.31	-
PK	2.48G	105.25	Inf	-Inf	31.81	3	Vertical	207	1.83	73.44	27.50	4.31	-
PK	2.4835G	70.66	74.00	-3.34	31.85	3	Vertical	207	1.83	38.81	27.54	4.31	-

2.4-2.4835GHz\_BT-LE(1Mbps)


2480MHz\_TX

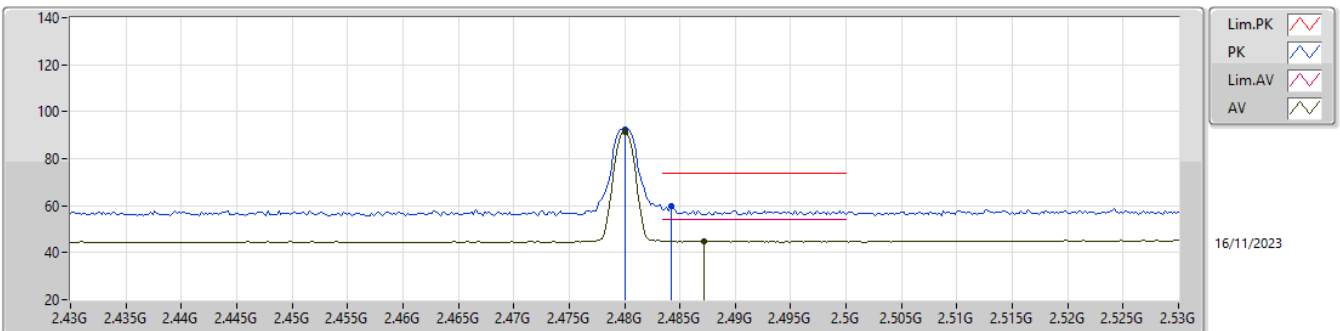

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	91.56	Inf	-Inf	31.81	3	Horizontal	84	1.50	59.75	27.50	4.31	-
AV	2.4872G	44.91	54.00	-9.09	31.88	3	Horizontal	84	1.50	13.03	27.57	4.31	-
PK	2.48G	92.67	Inf	-Inf	31.81	3	Horizontal	84	1.50	60.86	27.50	4.31	-
PK	2.4842G	59.66	74.00	-14.34	31.85	3	Horizontal	84	1.50	27.81	27.54	4.31	-

2.4-2.4835GHz\_BT-LE(1Mbps)


2480MHz\_TX

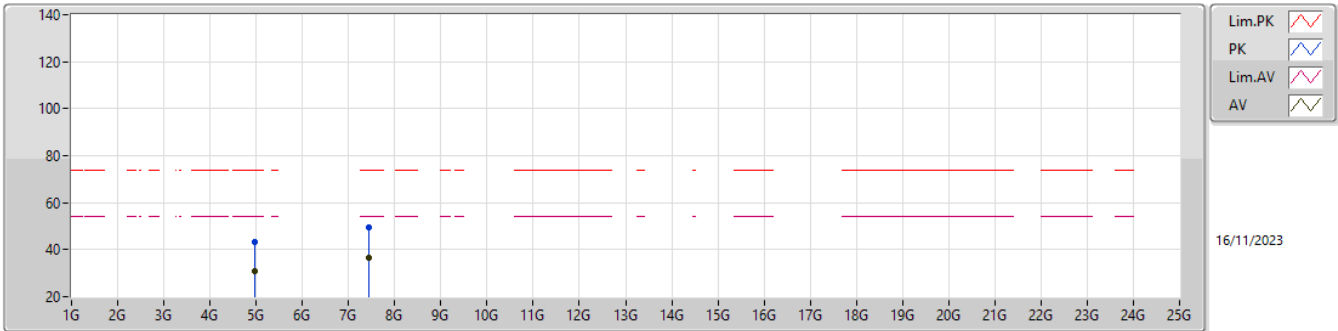

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.9599G	30.73	54.00	-23.27	4.43	3	Vertical	30	2.04	26.30	32.94	6.27	34.78
AV	7.44063G	36.69	54.00	-17.31	9.01	3	Vertical	347	1.50	27.68	36.12	7.89	35.00
PK	4.96052G	43.38	74.00	-30.62	4.43	3	Vertical	30	2.04	38.95	32.94	6.27	34.78
PK	7.43935G	49.63	74.00	-24.37	9.01	3	Vertical	347	1.50	40.62	36.12	7.89	35.00

2.4-2.4835GHz\_BT-LE(1Mbps)


2480MHz\_TX

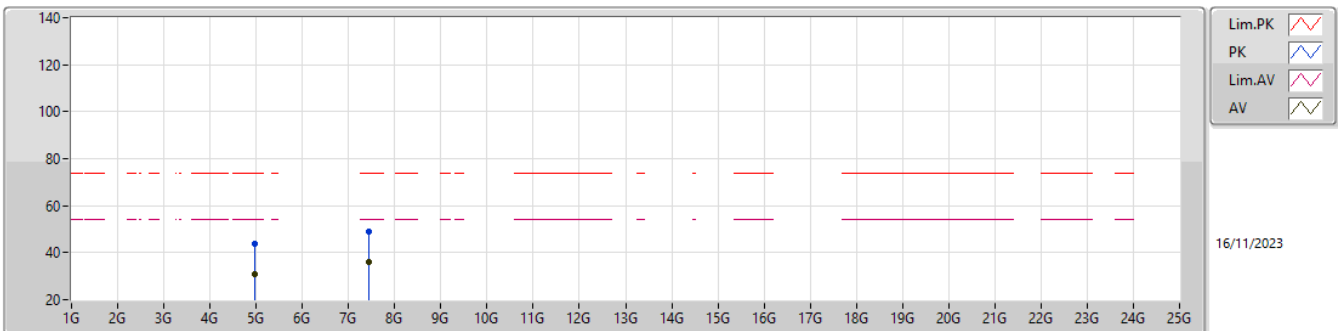

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.95987G	30.83	54.00	-23.17	4.43	3	Horizontal	320	2.54	26.40	32.94	6.27	34.78
AV	7.44068G	35.89	54.00	-18.11	9.01	3	Horizontal	22	1.00	26.88	36.12	7.89	35.00
PK	4.96041G	43.63	74.00	-30.37	4.43	3	Horizontal	320	2.54	39.20	32.94	6.27	34.78
PK	7.44051G	49.02	74.00	-24.98	9.01	3	Horizontal	22	1.00	40.01	36.12	7.89	35.00

2.4-2.4835GHz\_BT-LE(2Mbps)


2480MHz\_TX

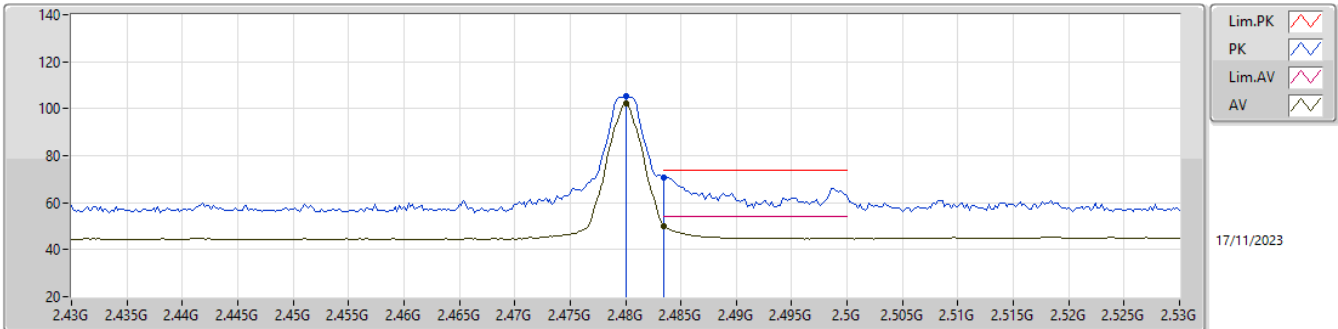

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	102.13	Inf	-Inf	31.81	3	Vertical	206	1.84	70.32	27.50	4.31	-
AV	2.4835G	50.24	54.00	-3.76	31.85	3	Vertical	206	1.84	18.39	27.54	4.31	-
PK	2.48G	105.22	Inf	-Inf	31.81	3	Vertical	206	1.84	73.41	27.50	4.31	-
PK	2.4835G	70.76	74.00	-3.24	31.85	3	Vertical	206	1.84	38.91	27.54	4.31	-

2.4-2.4835GHz\_BT-LE(2Mbps)


2480MHz\_TX

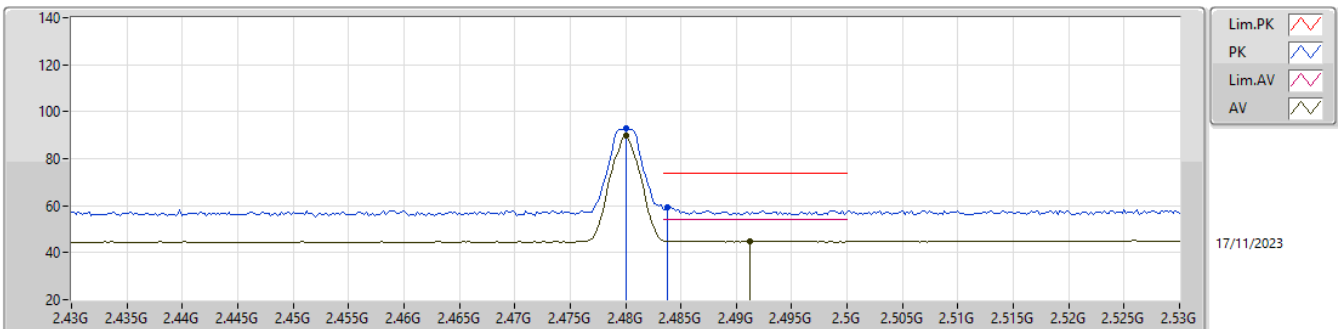

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	89.65	Inf	-Inf	31.81	3	Horizontal	80	1.50	57.84	27.50	4.31	-
AV	2.4912G	45.01	54.00	-8.99	31.91	3	Horizontal	80	1.50	13.10	27.60	4.31	-
PK	2.48G	92.70	Inf	-Inf	31.81	3	Horizontal	80	1.50	60.89	27.50	4.31	-
PK	2.4838G	59.48	74.00	-14.52	31.85	3	Horizontal	80	1.50	27.63	27.54	4.31	-

2.4-2.4835GHz\_BT-LE(2Mbps)


2480MHz\_TX

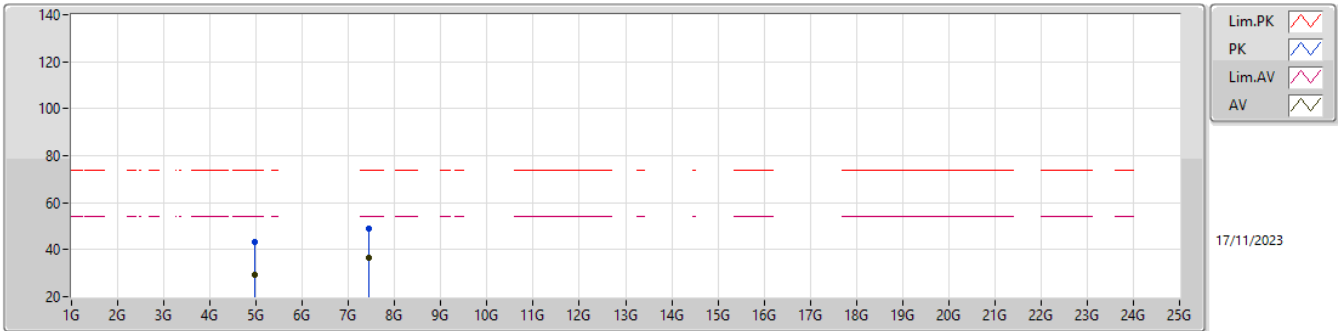

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.96002G	29.48	54.00	-24.52	4.43	3	Vertical	4	1.95	25.05	32.94	6.27	34.78
AV	7.44129G	36.45	54.00	-17.55	9.01	3	Vertical	353	1.39	27.44	36.12	7.89	35.00
PK	4.95991G	43.05	74.00	-30.95	4.43	3	Vertical	4	1.95	38.62	32.94	6.27	34.78
PK	7.44144G	48.85	74.00	-25.15	9.01	3	Vertical	353	1.39	39.84	36.12	7.89	35.00

2.4-2.4835GHz\_BT-LE(2Mbps)

2480MHz\_TX

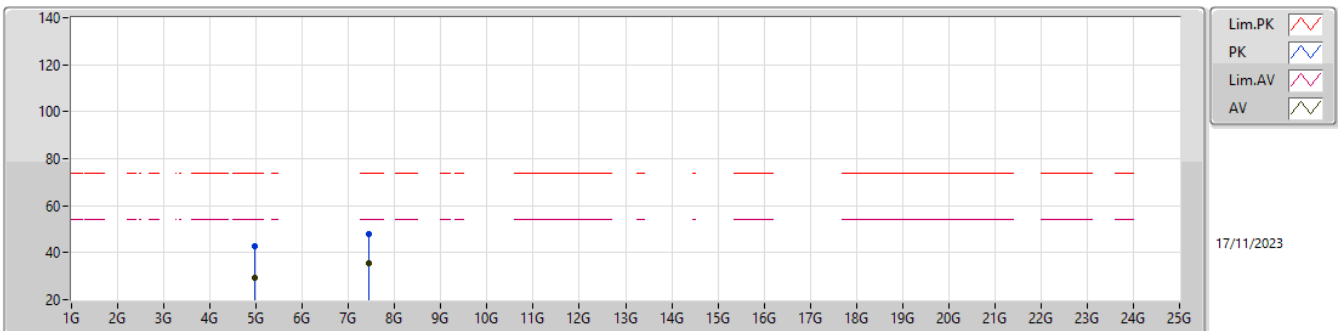

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.95901G	29.34	54.00	-24.66	4.43	3	Horizontal	333	1.45	24.91	32.94	6.27	34.78
AV	7.43883G	35.67	54.00	-18.33	9.00	3	Horizontal	27	1.14	26.67	36.12	7.88	35.00
PK	4.95854G	42.94	74.00	-31.06	4.42	3	Horizontal	333	1.45	38.52	32.93	6.27	34.78
PK	7.44149G	48.13	74.00	-25.87	9.01	3	Horizontal	27	1.14	39.12	36.12	7.89	35.00



**Summary**


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	4.87394G	41.82	54.00	-12.18	Vertical
Mode 2	Pass	AV	4.874G	42.01	54.00	-11.99	Vertical
Mode 3	Pass	AV	7.31014G	42.93	54.00	-11.07	Vertical
Mode 4	Pass	AV	4.87397G	43.09	54.00	-10.91	Vertical



Result


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
Mode 1	Pass	AV	1.41266G	26.31	54.00	-27.69	3	Vertical	95	2.64
Mode 1	Pass	AV	3.53248G	30.86	68.20	-37.34	3	Vertical	358	2.00
Mode 1	Pass	AV	4.87394G	41.82	54.00	-12.18	3	Vertical	0	2.17
Mode 1	Pass	PK	1.41422G	37.45	74.00	-36.55	3	Vertical	95	2.64
Mode 1	Pass	PK	3.53281G	42.94	68.20	-25.26	3	Vertical	358	2.00
Mode 1	Pass	PK	4.874G	56.99	74.00	-17.01	3	Vertical	0	2.17
Mode 1	Pass	AV	1.32744G	25.99	54.00	-28.01	3	Horizontal	15	1.10
Mode 1	Pass	AV	3.09788G	30.81	68.20	-37.39	3	Horizontal	14	2.35
Mode 1	Pass	AV	4.61682G	33.16	54.00	-20.84	3	Horizontal	180	2.81
Mode 1	Pass	PK	1.3327G	38.45	74.00	-35.55	3	Horizontal	15	1.10
Mode 1	Pass	PK	3.0972G	42.77	68.20	-25.43	3	Horizontal	14	2.35
Mode 1	Pass	PK	4.6167G	45.09	74.00	-28.91	3	Horizontal	180	2.81
Mode 2	Pass	AV	1.24004G	26.17	68.20	-42.03	3	Vertical	201	2.19
Mode 2	Pass	AV	2.75358G	30.47	54.00	-23.53	3	Vertical	54	1.46
Mode 2	Pass	AV	4.874G	42.01	54.00	-11.99	3	Vertical	359	2.17
Mode 2	Pass	PK	1.24211G	37.86	68.20	-30.34	3	Vertical	201	2.19
Mode 2	Pass	PK	2.76174G	42.14	74.00	-31.86	3	Vertical	54	1.46
Mode 2	Pass	PK	4.874G	57.43	74.00	-16.57	3	Vertical	359	2.17
Mode 2	Pass	AV	1.32693G	25.99	54.00	-28.01	3	Horizontal	223	2.88
Mode 2	Pass	AV	3.21567G	30.74	68.20	-37.46	3	Horizontal	320	1.21
Mode 2	Pass	AV	4.99585G	35.36	54.00	-18.64	3	Horizontal	71	2.10
Mode 2	Pass	PK	1.3324G	38.60	74.00	-35.40	3	Horizontal	223	2.88
Mode 2	Pass	PK	3.22681G	42.15	68.20	-26.05	3	Horizontal	320	1.21
Mode 2	Pass	PK	5.00032G	46.78	74.00	-27.22	3	Horizontal	71	2.10
Mode 3	Pass	AV	1.59743G	26.59	54.00	-27.41	3	Vertical	36	2.86
Mode 3	Pass	AV	4.87388G	41.63	54.00	-12.37	3	Vertical	159	2.05
Mode 3	Pass	AV	7.31014G	42.93	54.00	-11.07	3	Vertical	312	1.60
Mode 3	Pass	PK	1.59767G	48.54	74.00	-25.46	3	Vertical	36	2.86
Mode 3	Pass	PK	4.874G	54.82	74.00	-19.18	3	Vertical	159	2.05
Mode 3	Pass	PK	7.30972G	58.51	74.00	-15.49	3	Vertical	312	1.60
Mode 3	Pass	AV	1.59469G	26.14	54.00	-27.86	3	Horizontal	168	2.59
Mode 3	Pass	AV	4.9392G	34.94	54.00	-19.06	3	Horizontal	54	1.07
Mode 3	Pass	AV	7.30913G	41.62	54.00	-12.38	3	Horizontal	14	1.48
Mode 3	Pass	PK	1.59673G	46.14	74.00	-27.86	3	Horizontal	168	2.59
Mode 3	Pass	PK	4.94097G	46.78	74.00	-27.22	3	Horizontal	54	1.07
Mode 3	Pass	PK	7.31134G	57.38	74.00	-16.62	3	Horizontal	14	1.48
Mode 4	Pass	AV	1.1981G	25.50	54.00	-28.50	3	Vertical	72	2.18
Mode 4	Pass	AV	3.59547G	30.43	68.20	-37.77	3	Vertical	305	1.50
Mode 4	Pass	AV	4.87397G	43.09	54.00	-10.91	3	Vertical	0	2.06
Mode 4	Pass	PK	1.19827G	39.22	74.00	-34.78	3	Vertical	72	2.18
Mode 4	Pass	PK	3.59459G	43.19	68.20	-25.01	3	Vertical	305	1.50
Mode 4	Pass	PK	4.87405G	58.46	74.00	-15.54	3	Vertical	0	2.06
Mode 4	Pass	AV	1.03488G	26.98	54.00	-27.02	3	Horizontal	48	1.50
Mode 4	Pass	AV	2.11151G	26.94	68.20	-41.26	3	Horizontal	222	1.50
Mode 4	Pass	AV	4.87407G	34.78	54.00	-19.22	3	Horizontal	308	1.36
Mode 4	Pass	PK	1.04446G	40.54	74.00	-33.46	3	Horizontal	48	1.50
Mode 4	Pass	PK	2.11147G	39.70	68.20	-28.50	3	Horizontal	222	1.50
Mode 4	Pass	PK	4.87423G	47.55	74.00	-26.45	3	Horizontal	308	1.36

**Radiated Emissions above 1GHz\_Mode 1**

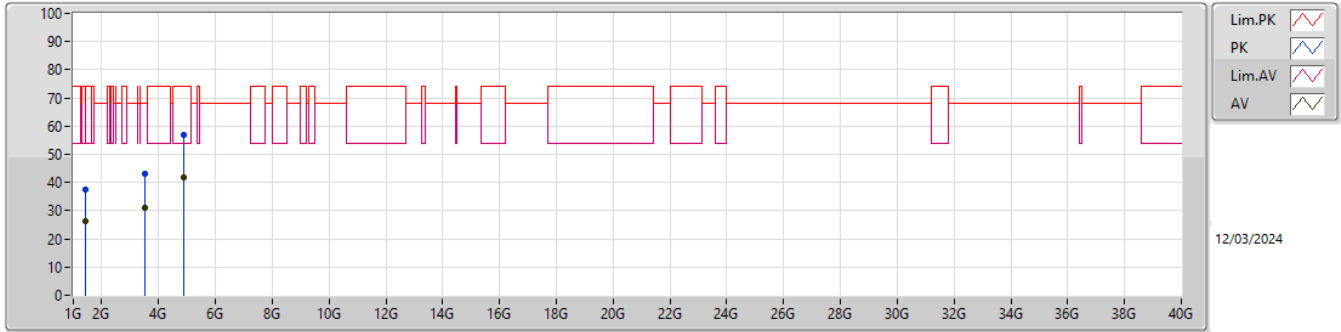

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
AV	1.41266G	26.31	54.00	-27.69	-5.88	3	Vertical	95	2.64	32.19	25.80	3.43	35.11
AV	3.53248G	30.86	68.20	-37.34	-0.01	3	Vertical	358	2.00	30.87	29.30	5.67	34.98
AV	4.87394G	41.82	54.00	-12.18	4.28	3	Vertical	0	2.17	37.54	32.50	6.59	34.81
PK	1.41422G	37.45	74.00	-36.55	-5.88	3	Vertical	95	2.64	43.33	25.80	3.43	35.11
PK	3.53281G	42.94	68.20	-25.26	-0.01	3	Vertical	358	2.00	42.95	29.30	5.67	34.98
PK	4.874G	56.99	74.00	-17.01	4.28	3	Vertical	0	2.17	52.71	32.50	6.59	34.81


**Radiated Emissions above 1GHz\_Mode 1**

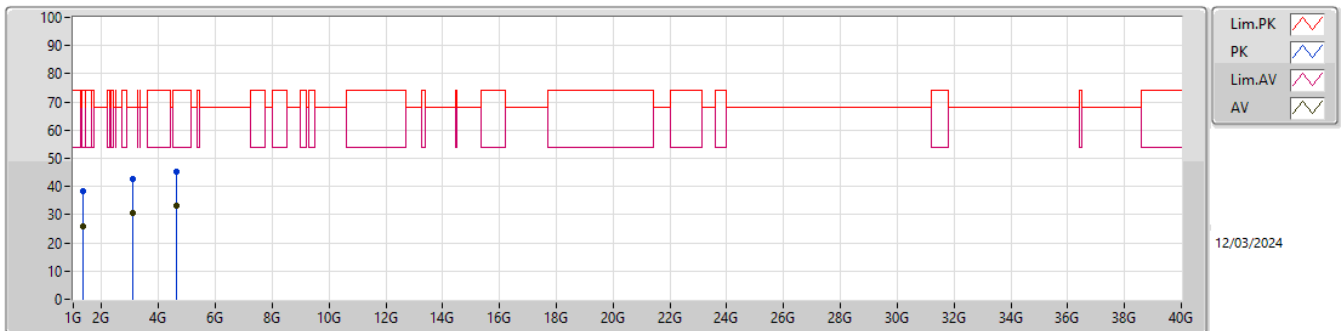

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
AV	1.32744G	25.99	54.00	-28.01	-6.11	3	Horizontal	15	1.10	32.10	25.83	3.32	35.26
AV	3.09788G	30.81	68.20	-37.39	-0.28	3	Horizontal	14	2.35	31.09	29.50	5.25	35.03
AV	4.61682G	33.16	54.00	-20.84	3.04	3	Horizontal	180	2.81	30.12	31.53	6.39	34.88
PK	1.3327G	38.45	74.00	-35.55	-6.16	3	Horizontal	15	1.10	44.61	25.77	3.32	35.25
PK	3.0972G	42.77	68.20	-25.43	-0.29	3	Horizontal	14	2.35	43.06	29.49	5.25	35.03
PK	4.6167G	45.09	74.00	-28.91	3.07	3	Horizontal	180	2.81	42.02	31.55	6.40	34.88




Radiated Emissions above 1GHz\_Mode 2

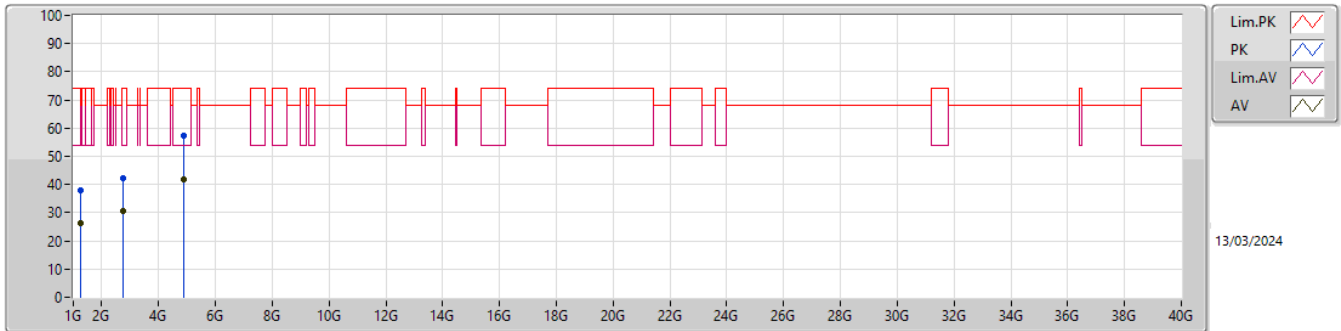


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
AV	1.24004G	26.17	68.20	-42.03	-6.60	3	Vertical	201	2.19	32.77	25.60	3.20	35.40
AV	2.75358G	30.47	54.00	-23.53	-1.84	3	Vertical	54	1.46	32.31	28.24	4.93	35.01
AV	4.874G	42.01	54.00	-11.99	4.28	3	Vertical	359	2.17	37.73	32.50	6.59	34.81
PK	1.24211G	37.86	68.20	-30.34	-6.60	3	Vertical	201	2.19	44.46	25.60	3.20	35.40
PK	2.76174G	42.14	74.00	-31.86	-1.77	3	Vertical	54	1.46	43.91	28.30	4.94	35.01
PK	4.874G	57.43	74.00	-16.57	4.28	3	Vertical	359	2.17	53.15	32.50	6.59	34.81

Radiated Emissions above 1GHz\_Mode 2

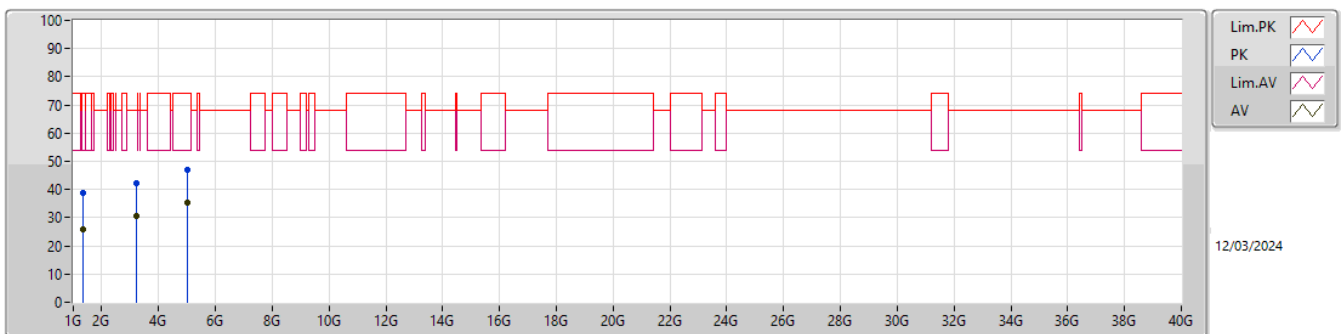


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
AV	1.32693G	25.99	54.00	-28.01	-6.11	3	Horizontal	223	2.88	32.10	25.83	3.32	35.26
AV	3.21567G	30.74	68.20	-37.46	-0.03	3	Horizontal	320	1.21	30.77	29.64	5.35	35.02
AV	4.99585G	35.36	54.00	-18.64	5.03	3	Horizontal	71	2.10	30.33	33.08	6.72	34.77
PK	1.3324G	38.60	74.00	-35.40	-6.15	3	Horizontal	223	2.88	44.75	25.78	3.32	35.25
PK	3.22681G	42.15	68.20	-26.05	-0.07	3	Horizontal	320	1.21	42.22	29.59	5.36	35.02
PK	5.00032G	46.78	74.00	-27.22	5.05	3	Horizontal	71	2.10	41.73	33.10	6.72	34.77

Radiated Emissions above 1GHz\_Mode 3

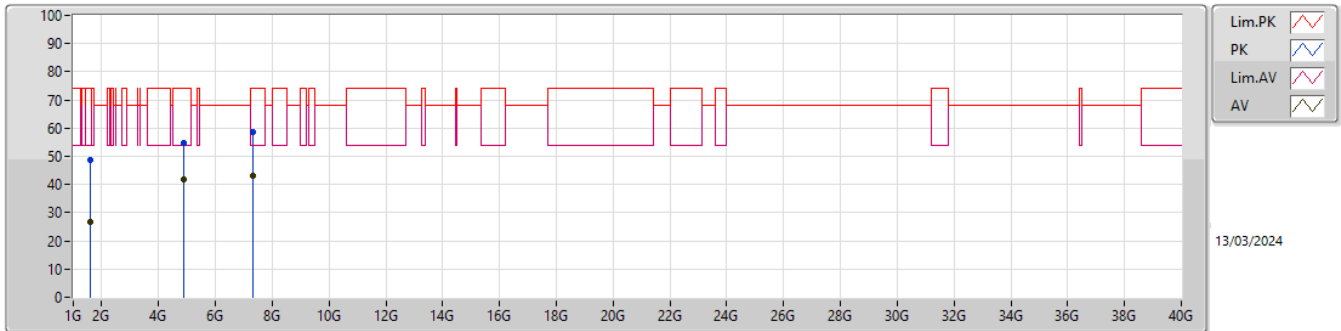


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
AV	1.59743G	26.59	54.00	-27.41	-5.94	3	Vertical	36	2.86	32.53	25.33	3.67	34.94
AV	4.87388G	41.63	54.00	-12.37	4.28	3	Vertical	159	2.05	37.35	32.50	6.59	34.81
AV	7.31014G	42.93	54.00	-11.07	10.03	3	Vertical	312	1.60	32.90	36.66	8.29	34.92
PK	1.59767G	48.54	74.00	-25.46	-5.95	3	Vertical	36	2.86	54.49	25.32	3.67	34.94
PK	4.874G	54.82	74.00	-19.18	4.28	3	Vertical	159	2.05	50.54	32.50	6.59	34.81
PK	7.30972G	58.51	74.00	-15.49	10.03	3	Vertical	312	1.60	48.48	36.66	8.29	34.92

Radiated Emissions above 1GHz\_Mode 3

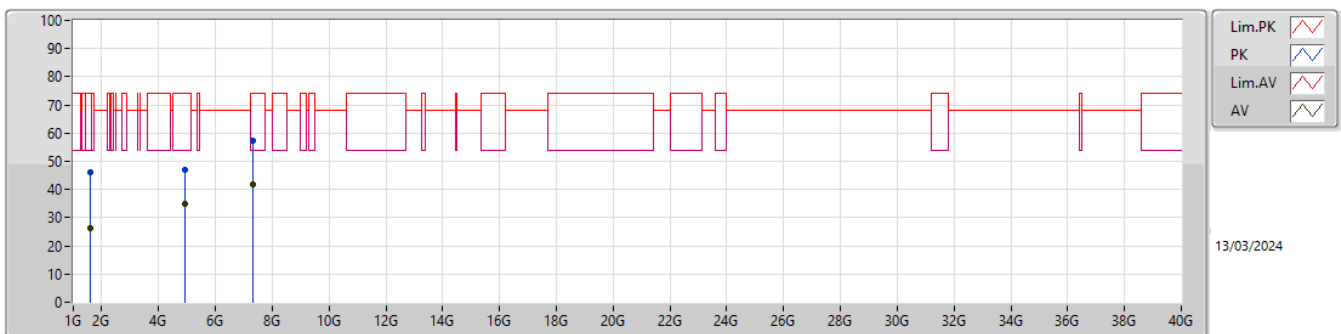


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
AV	1.59469G	26.14	54.00	-27.86	-5.93	3	Horizontal	168	2.59	32.07	25.35	3.66	34.94
AV	4.9392G	34.94	54.00	-19.06	4.71	3	Horizontal	54	1.07	30.23	32.84	6.66	34.79
AV	7.30913G	41.62	54.00	-12.38	10.03	3	Horizontal	14	1.48	31.59	36.66	8.29	34.92
PK	1.59673G	46.14	74.00	-27.86	-5.94	3	Horizontal	168	2.59	52.08	25.33	3.67	34.94
PK	4.94097G	46.78	74.00	-27.22	4.72	3	Horizontal	54	1.07	42.06	32.85	6.66	34.79
PK	7.31134G	57.38	74.00	-16.62	10.02	3	Horizontal	14	1.48	47.36	36.65	8.29	34.92

Radiated Emissions above 1GHz\_Mode 4

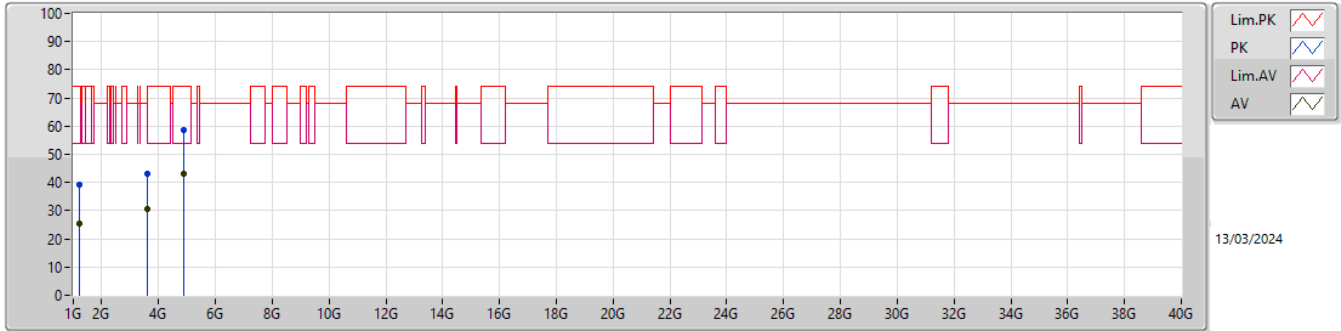

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
AV	1.1981G	25.50	54.00	-28.50	-6.48	3	Vertical	72	2.18	31.98	25.84	3.15	35.47
AV	3.59547G	30.43	68.20	-37.77	0.24	3	Vertical	305	1.50	30.19	29.48	5.72	34.96
AV	4.87397G	43.09	54.00	-10.91	4.28	3	Vertical	0	2.06	38.81	32.50	6.59	34.81
PK	1.19827G	39.22	74.00	-34.78	-6.49	3	Vertical	72	2.18	45.71	25.83	3.15	35.47
PK	3.59459G	43.19	68.20	-25.01	0.24	3	Vertical	305	1.50	42.95	29.48	5.72	34.96
PK	4.87405G	58.46	74.00	-15.54	4.28	3	Vertical	0	2.06	54.18	32.50	6.59	34.81

Radiated Emissions above 1GHz\_Mode 4

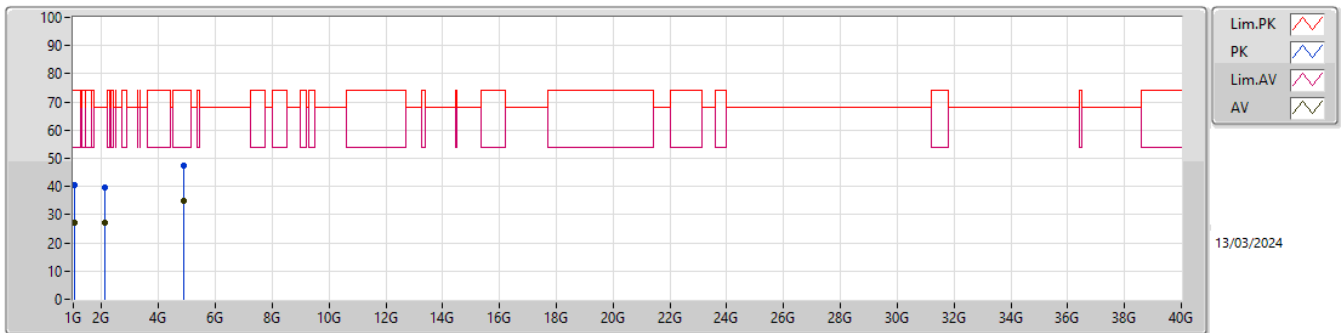

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
AV	1.03488G	26.98	54.00	-27.02	-7.97	3	Horizontal	48	1.50	34.95	24.85	2.92	35.74
AV	2.11151G	26.94	68.20	-41.26	-3.20	3	Horizontal	222	1.50	30.14	27.42	4.24	34.86
AV	4.87407G	34.78	54.00	-19.22	4.28	3	Horizontal	308	1.36	30.50	32.50	6.59	34.81
PK	1.04446G	40.54	74.00	-33.46	-8.04	3	Horizontal	48	1.50	48.58	24.76	2.93	35.73
PK	2.11147G	39.70	68.20	-28.50	-3.21	3	Horizontal	222	1.50	42.91	27.41	4.24	34.86
PK	4.87423G	47.55	74.00	-26.45	4.28	3	Horizontal	308	1.36	43.27	32.50	6.59	34.81