

TEST REPORT

ACCORDING TO: FCC 47 CFR PART 15 subpart C, section 15.249 and subpart B

FOR:

**Bioness Neuromodulation Ltd. -
A Bioness Inc Company
Patient Programmer of StimRouter
Peripheral Nerve Stimulator
Model number: ST2-5110
FCC ID:TVF-STRP-PP-V00**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Changes made in the EUT	5
6.3	Test configuration	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	Field strength of emissions	7
7.2	Band edge emission	25
7.3	Antenna requirements	29
7.4	Occupied bandwidth test	30
8	Emission tests according to 47CFR part 15 subpart B requirements	34
8.1	Radiated emission measurements	34
9	APPENDIX A Test equipment and ancillaries used for tests	39
10	APPENDIX B Measurement uncertainties	41
11	APPENDIX C Test laboratory description	42
12	APPENDIX D Specification references	42
13	APPENDIX E Test equipment correction factors	43
14	APPENDIX F Abbreviations and acronyms	54

1 Applicant information

Client name: Bioness Neuromodulation Ltd. - A Bioness Inc Company
Address: P.O.Box 2500, 19 Ha'haroshet street, Ra'anana 43654, Israel
Telephone: +972 9790 7100
Fax: +972 9748 5740
E-mail: eyal.kayton@bioness.co.il
Contact name: Mr. Eyal Kayton

2 Equipment under test attributes

Product name: Patient programmer of StimRouter Peripheral Nerve Stimulator
Product type: Transceiver
Model number: ST2-5110
Serial number: 5001101
Hardware version: 2.6
Software release: 2.0.1.7
Receipt date 4/17/2012

3 Manufacturer information

Manufacturer name: Bioness Neuromodulation Ltd. - A Bioness Inc Company
Address: P.O.Box 2500, 19 Ha'haroshet street, Ra'anana 43654, Israel
Telephone: +972 9790 7100
Fax: +972 9748 5740
E-Mail: eyal.kayton@bioness.co.il
Contact name: Mr. Eyal Kayton

4 Test details

Project ID: 23171
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 4/17/2012
Test completed: 5/13/2012
Test specification(s): FCC 47 CFR Part 15, subpart C, §15.249; subpart B §15.109

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.249(a)(d), Field strength of emissions	Pass
Section 15.249(d), Band edge emissions	Pass
Section 15.207(a), Conducted emission	Not required
Section 15.203, Antenna requirement	Pass
Section 15.215(c), Occupied bandwidth	Pass
Unintentional emissions	
Section 15.107, Conducted emission at AC power port	Not required
Section 15.109, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

This test report replaces the previously issued test report identified by Doc ID:BIORAD_FCC.23171_PP.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer	May 13, 2012	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	May 14, 2012	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	May 29, 2012	

6 EUT description


6.1 General information

The EUT, a patient programmer (PP), is a transceiver, part of the StimRouter Peripheral Nerve Stimulator. The EUT's function is to generate electrical stimulation pulses. It is powered by 1.2 V battery.

6.2 Changes made in the EUT

No changes were implemented.

6.3 Test configuration

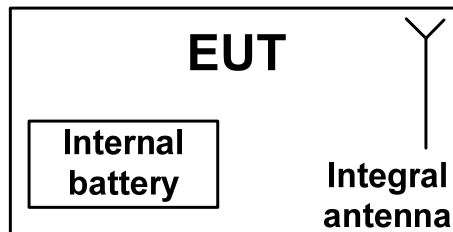

6.4 Transmitter characteristics

Type of equipment								
V	Stand-alone (Equipment with or without its own control provisions)							
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)							
	Plug-in card (Equipment intended for a variety of host systems)							
Intended use		Condition of use						
	fixed	Always at a distance more than 2 m from all people						
	mobile	Always at a distance more than 20 cm from all people						
V	portable	May operate at a distance closer than 20 cm to human body						
Assigned frequency range		2400.0 – 2483.5 MHz						
Operating frequency range		2401 – 2417 MHz						
Maximum field strength of carrier		95.9 dBµV/m at 3 m distance						
Is transmitter output power variable?		V	No					
			Yes	continuous variable				
				stepped variable with stepsize				
				dB				
				dBm				
		maximum RF power						
		dBm						
Antenna connection								
unique coupling		standard connector		V	integral		with temporary RF connector	
				V			without temporary RF connector	
Antenna/s technical characteristics								
Type	Manufacturer		Model number		Gain			
Chip antenna	Fractus		FR05-S1-N-0-102		1.5 dBi			
Transmitter aggregate data rate/s		250 kbps						
Type of modulation		MSK						
Transmitter duty cycle supplied for test		100 %		Tx ON time	NA		Period NA	
Transmitter power source								
V	Battery	Nominal rated voltage	1.2 V		Battery type	Rechargeable AAA		
	DC	Nominal rated voltage						
	AC mains	Nominal rated voltage			Frequency	Hz		
Common power source for transmitter and receiver				V	yes		no	



Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Field strength of emissions

7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.1.1, Table 7.1.2, Table 7.1.3.

Table 7.1.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)		
	Peak	Average	Quasi-Peak
2400 – 2483.5	114.0	94.0	NA

Table 7.1.2 Harmonics limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
2400 – 2483.5	74.0	54.0

Table 7.1.3 Radiated spurious emissions limits (other than harmonics)

Frequency, MHz	Field strength at 3 m, dB(μV/m)*			
	Peak	Quasi Peak	Average	Attenuation below carrier
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	50 dBc (whichever is the less stringent)
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
Above 1000	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

Note: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency but not exceeding 40 GHz for intentional radiators operated below 10 GHz and up to the fifth harmonic of the highest fundamental frequency but not exceeding 100 GHz for intentional radiators operated above 10 GHz.



Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			

7.1.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.2.2 The measurements were performed in three EUT orthogonal positions.

7.1.2.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.1.2.4 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots.

7.1.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.1.3.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.

7.1.3.2 The measurements were performed in three EUT orthogonal positions.

7.1.3.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.1.3.4 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots.

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.4, Section 13.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 5/1/2012 - 5/2/2012			
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			

Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz


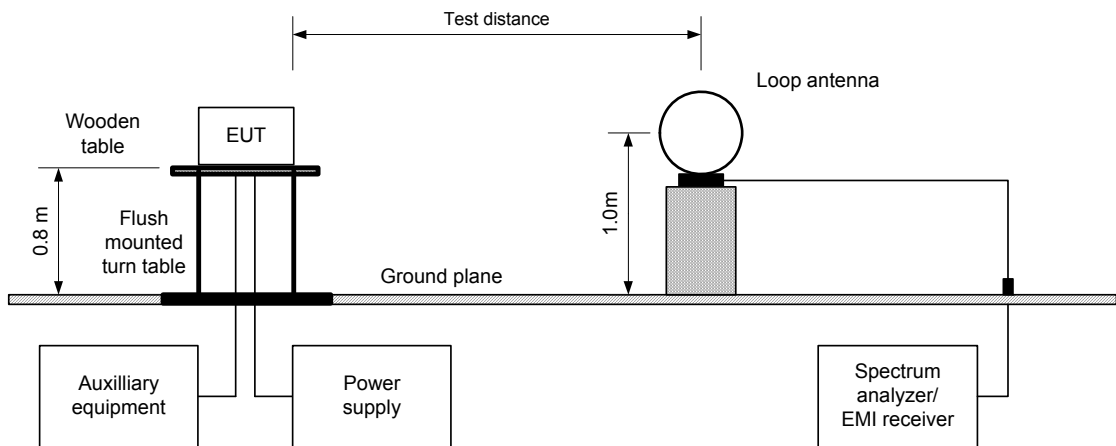


Figure 7.1.2 Setup for spurious emission field strength measurements above 30 MHz



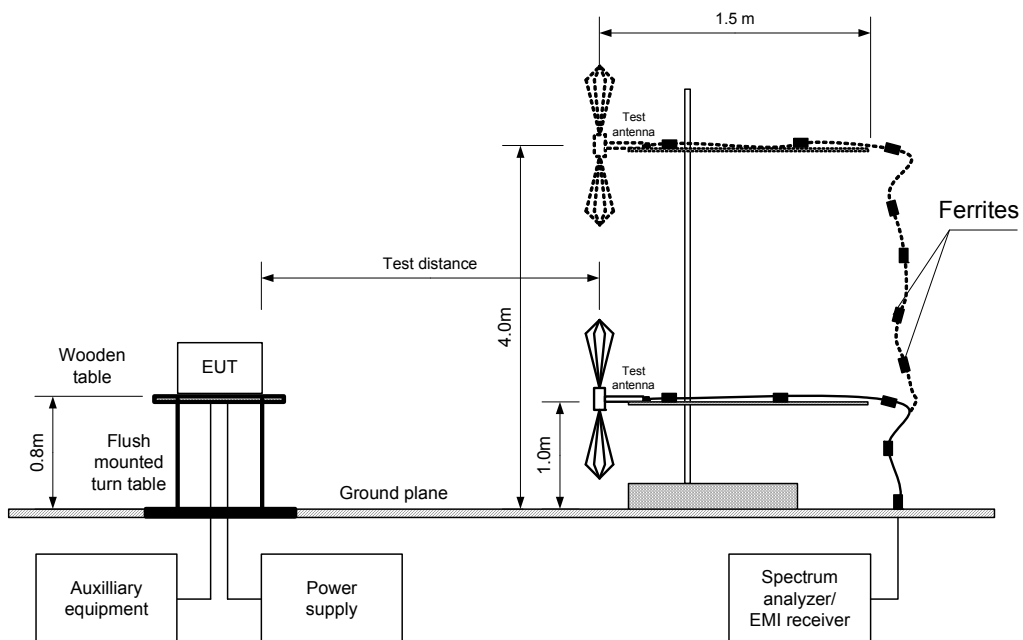

HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict: PASS	
Date(s):	5/1/2012 - 5/2/2012		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			

Table 7.1.4 Field strength of fundamental emission and spurious emissions

TEST DISTANCE:	3 m
EUT POSITION:	3 orthogonal X / Y / Z
MODULATION:	MSK
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 25000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Avr factor, dB	Average field strength			Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**		Calculated dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
Fundamental emission***											
2401	H	1.1	340	92.90	114	-21.10	-38.7	54.20	94	-39.80	Pass
2409	H	1.1	89	93.49	114	-20.51	-38.7	54.79	94	-39.21	
2417	V	1.3	19	95.89	114	-18.11	-38.7	57.19	94	-36.81	
Spurious emissions											
4801.66	H	1.4	289	53.26	74	-20.74	-38.7	14.56	54	-39.44	Pass
4818.26	H	1.4	320	52.79	74	-21.21	-38.7	14.09	54	-39.91	
4834.25	H	1.4	300	54.33	74	-19.67	-38.7	15.63	54	-38.37	
7203.00	H	1.2	180	50.62	74	-23.38	-38.7	11.92	54	-42.08	
7227.58	H	1.3	185	50.17	74	-23.83	-38.7	11.47	54	-42.53	
7252.02	H	1.2	179	54.41	74	-19.59	-38.7	15.71	54	-38.29	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB = Measured (calculated) value, dB(μV/m) - Limit, dB(μV/m).

*** Max values obtained in 3 orthogonal position measurements.

Table 7.1.5 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
1.16	100	NA	NA	NA	-38.7

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

HL 0446	HL 0604	HL 0768	HL 1984	HL 2432	HL 2697	HL 2882	HL 2909
HL 3347	HL 3390	HL 3533	HL 3535	HL 3901	HL 4160	HL 4222	HL 4338

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			


Plot 7.1.1 Radiated emission measurements at the low fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: 3 orthogonal (X/ Y/ Z)

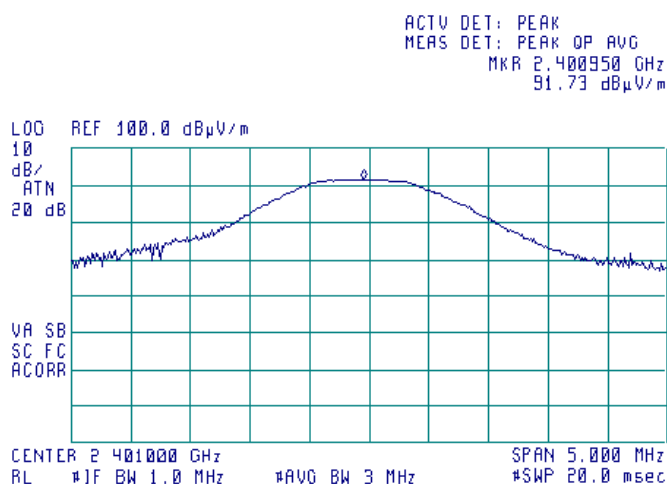

Plot 7.1.2 Radiated emission measurements at the low fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: 3 orthogonal (X/ Y/ Z)

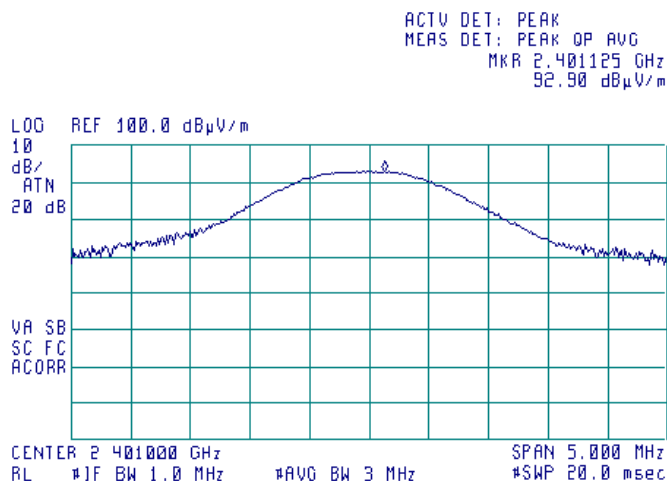




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			


Plot 7.1.3 Radiated emission measurements at the mid fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: 3 orthogonal (X/ Y/ Z)

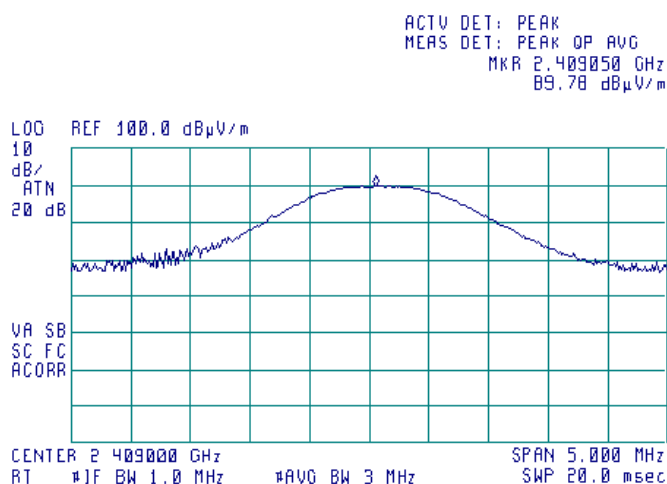

Plot 7.1.4 Radiated emission measurements at the mid fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: 3 orthogonal (X/ Y/ Z)

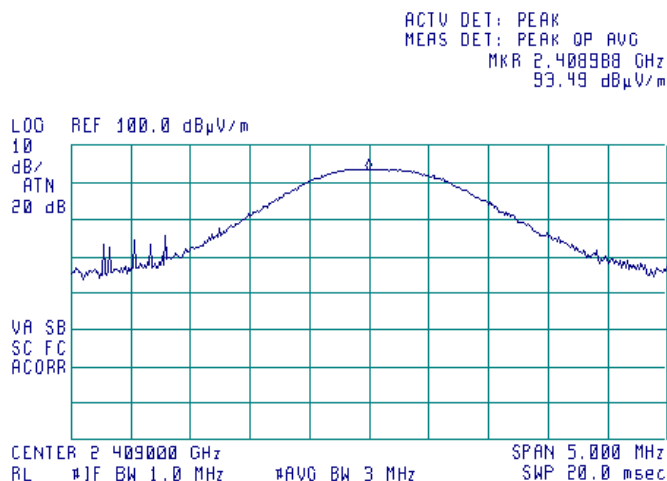




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			


Plot 7.1.5 Radiated emission measurements at the high fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: 3 orthogonal (X/ Y/ Z)

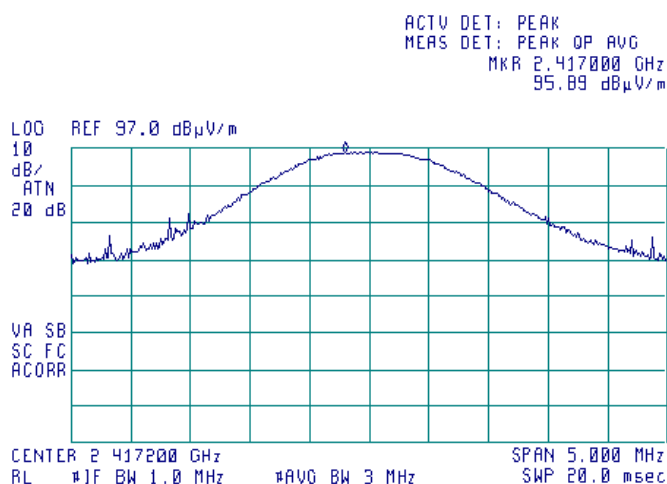

Plot 7.1.6 Radiated emission measurements at the high fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: 3 orthogonal (X/ Y/ Z)

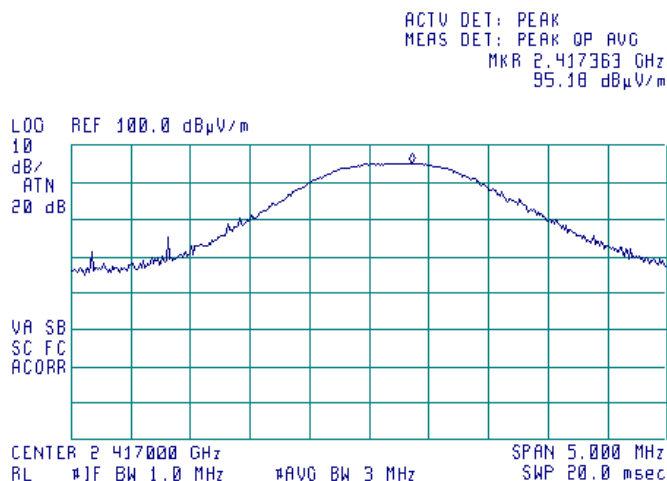




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			


Plot 7.1.7 Radiated emission measurements from 9 to 150 kHz at the low, mid and high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

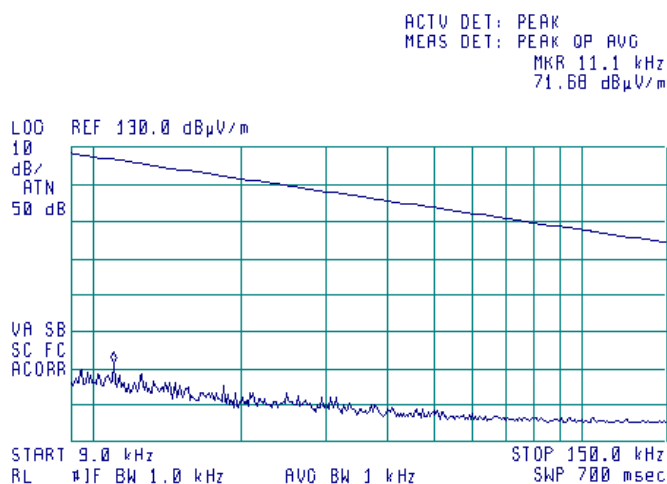

Plot 7.1.8 Radiated emission measurements from 0.15 to 30 MHz at the low, mid and high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

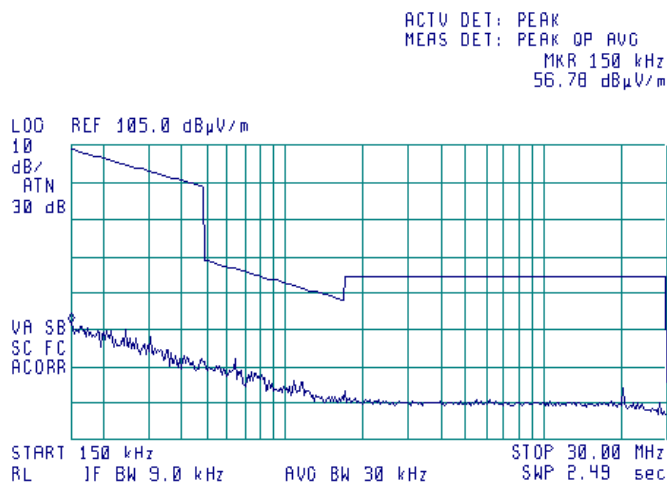




HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.4, Section 13.1.4			
Test mode: Compliance			Verdict: PASS
Date(s): 5/1/2012 - 5/2/2012			
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			



Plot 7.1.9 Radiated emission measurements from 30 to 1000 MHz at the low, mid and high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

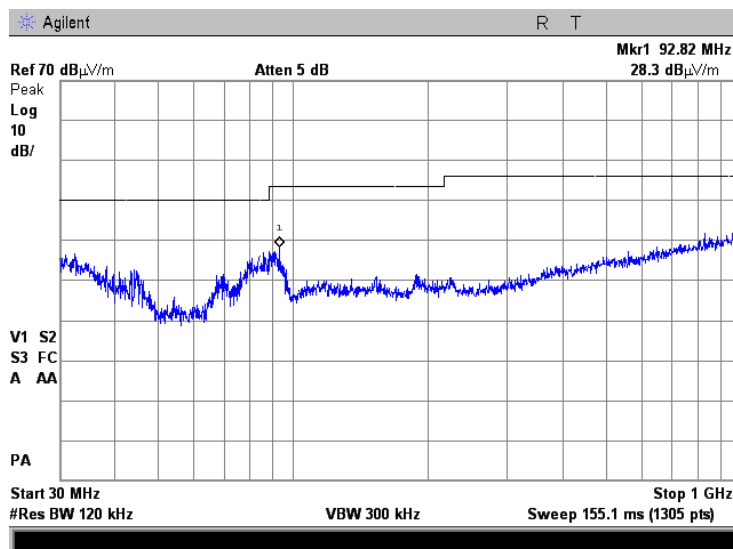

Plot 7.1.10 Radiated emission measurements from 1000 to 2900 MHz at the low carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

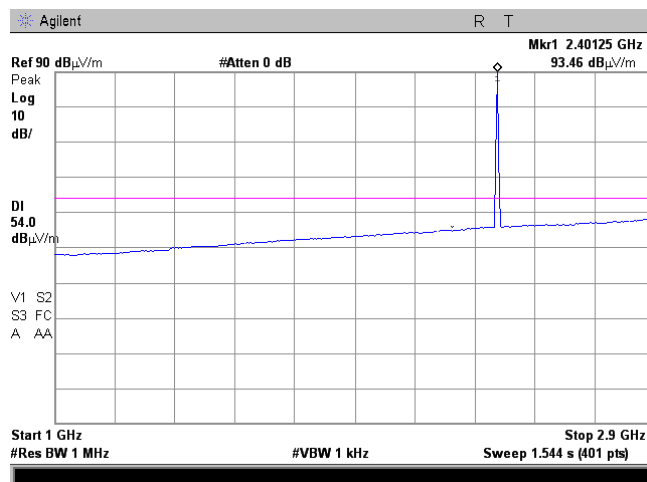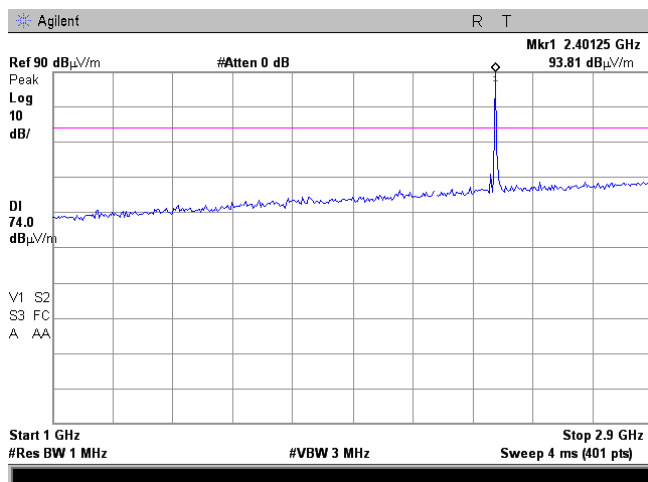





HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			



Plot 7.1.11 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

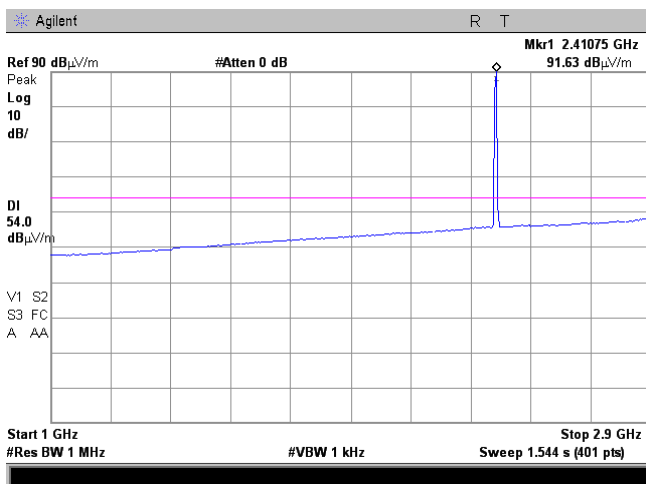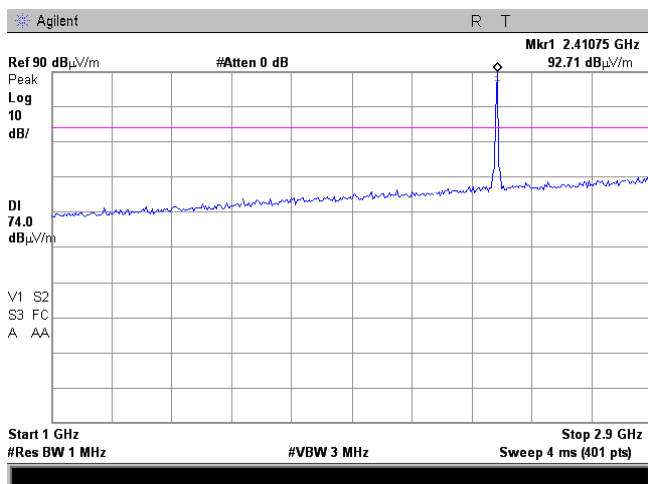

Plot 7.1.12 Radiated emission measurements from 1000 to 2900 MHz at the high carrier frequency



TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

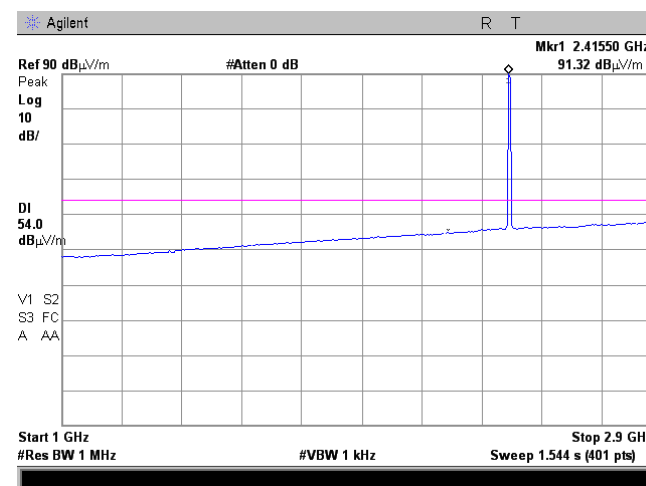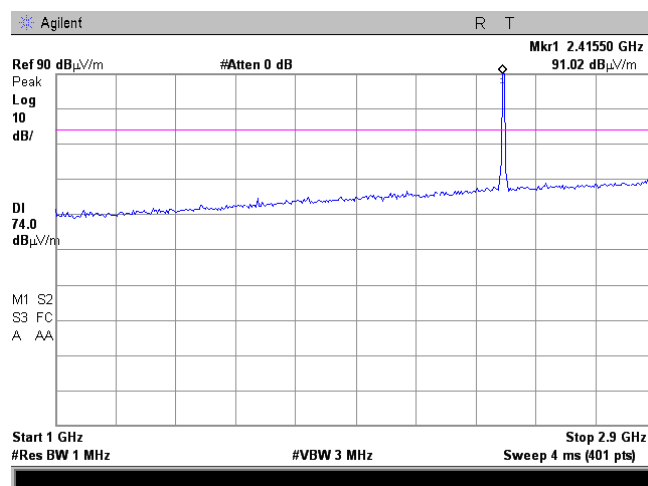

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			



Plot 7.1.13 Radiated emission measurements from 2900 to 6000 MHz at the low carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

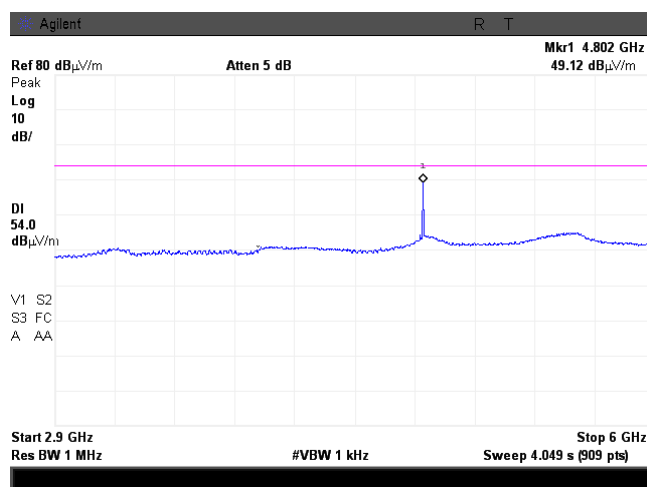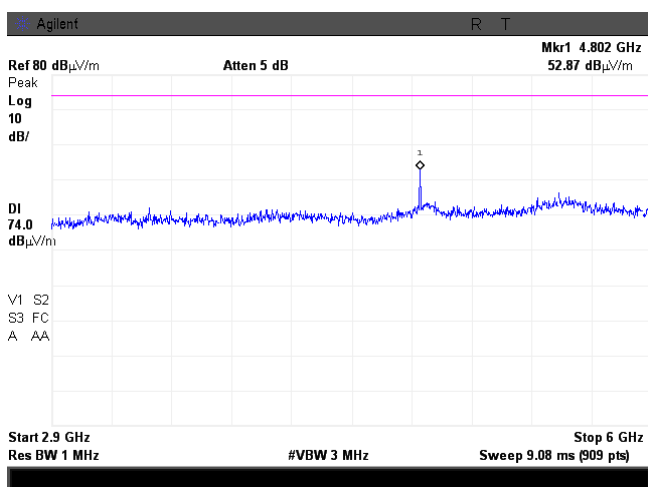

Plot 7.1.14 Radiated emission measurements from 2900 to 6000 MHz at the mid carrier frequency



TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

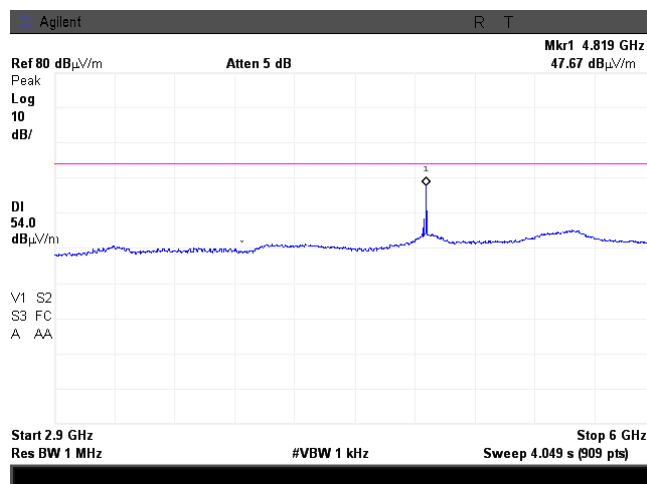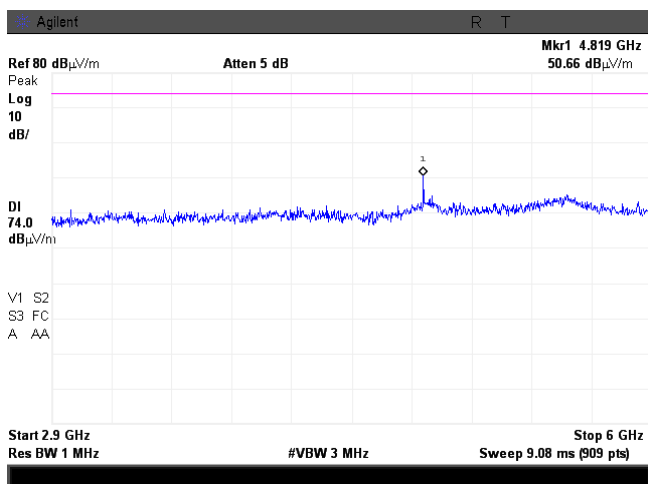

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			



Plot 7.1.15 Radiated emission measurements from 2900 to 6000 MHz at the high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

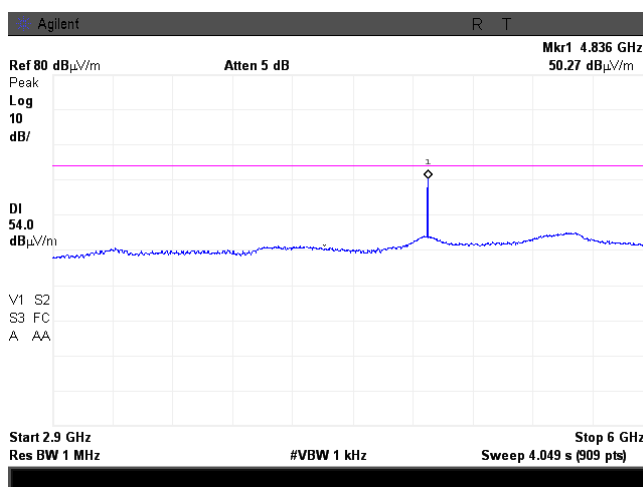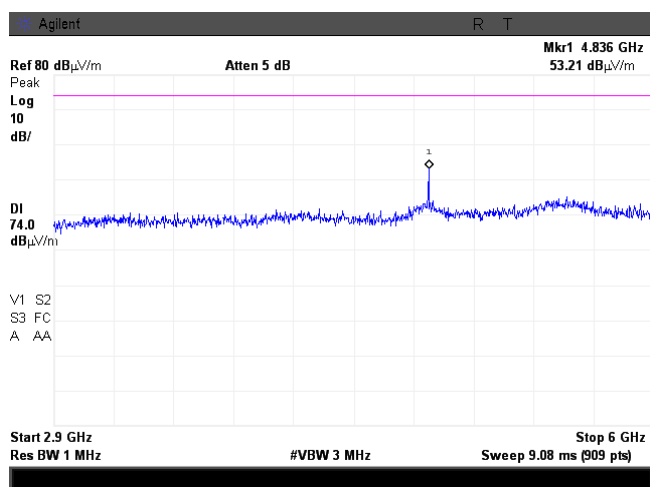

Plot 7.1.16 Radiated emission measurements from 6000 to 14000 MHz at the low carrier frequency



TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

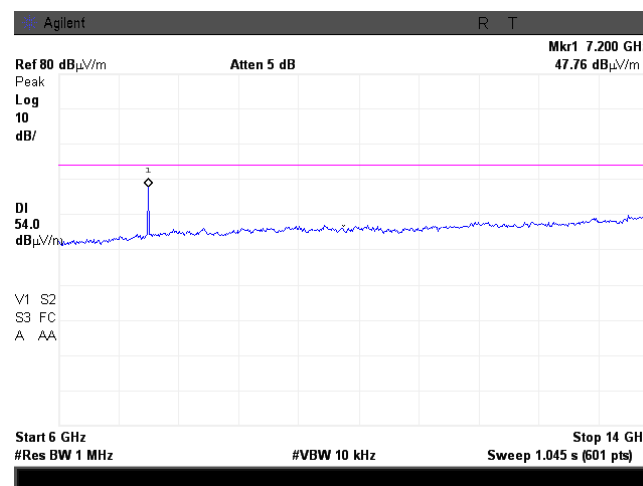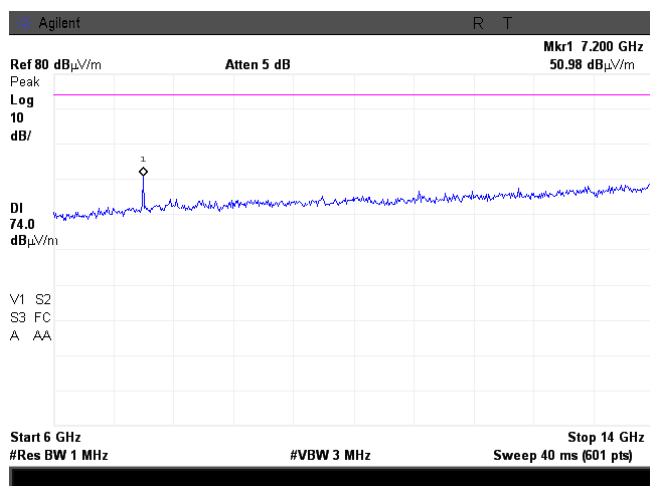

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			



Plot 7.1.17 Radiated emission measurements from 6000 to 14000 MHz at the mid carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

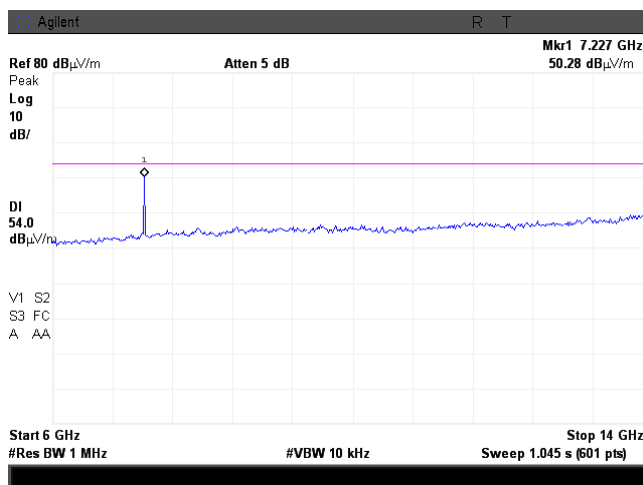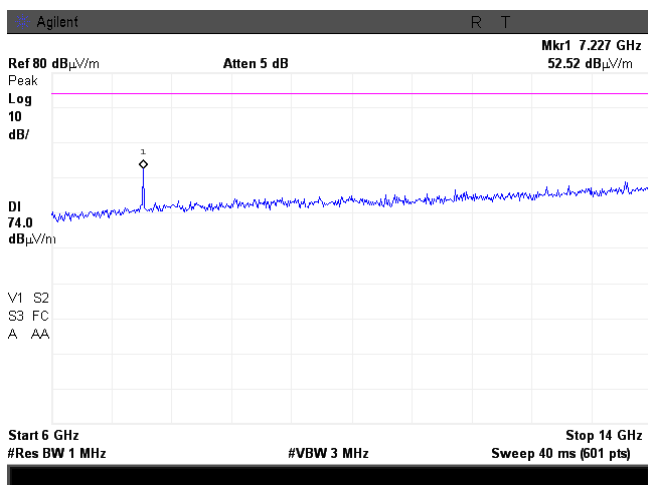

Plot 7.1.18 Radiated emission measurements from 6000 to 14000 MHz at the high carrier frequency


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

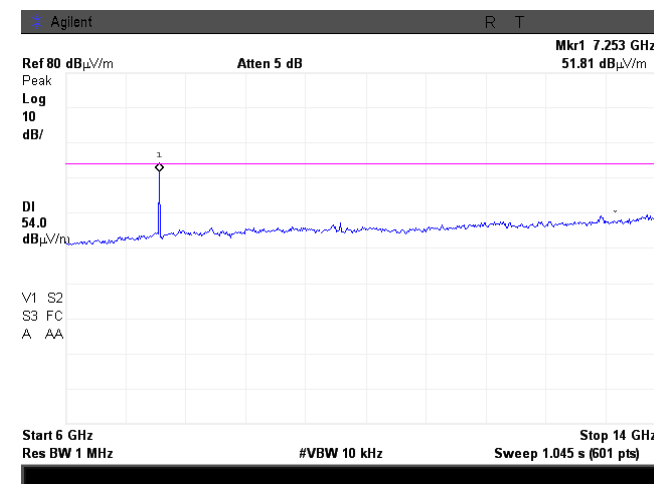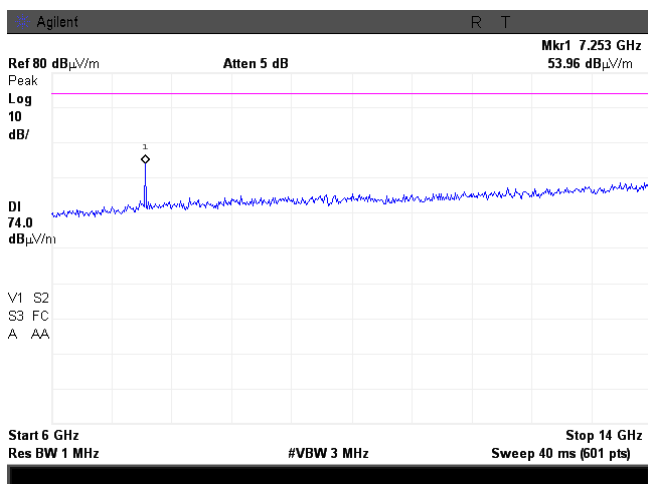

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			


Plot 7.1.19 Radiated emission measurements from 14000 to 18000 MHz at low, mid and high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

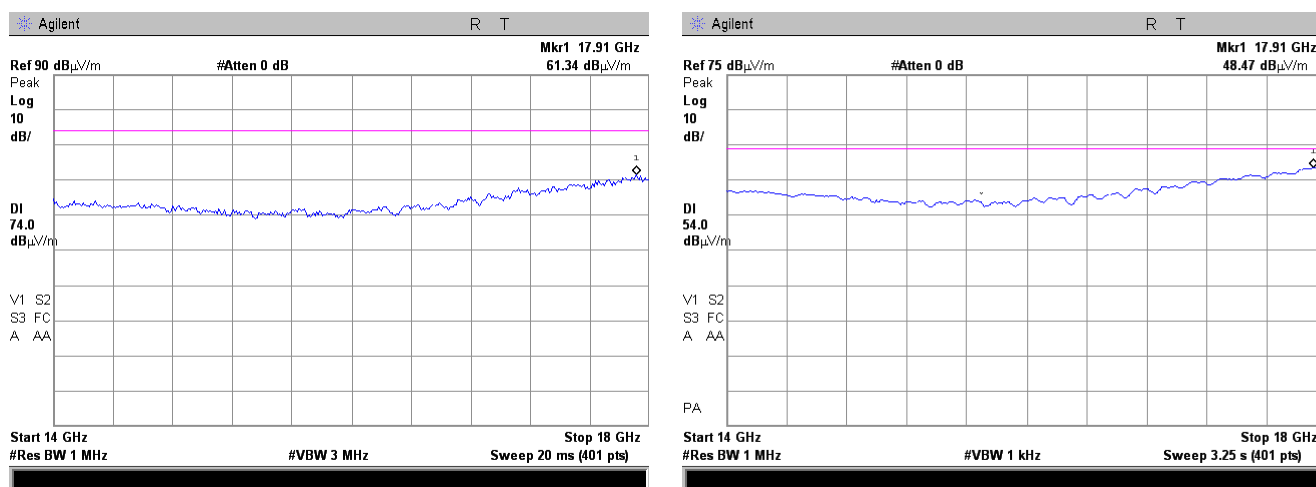

Plot 7.1.20 Radiated emission measurements from 18000 to 25000 MHz at low, mid and high carrier frequency



TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

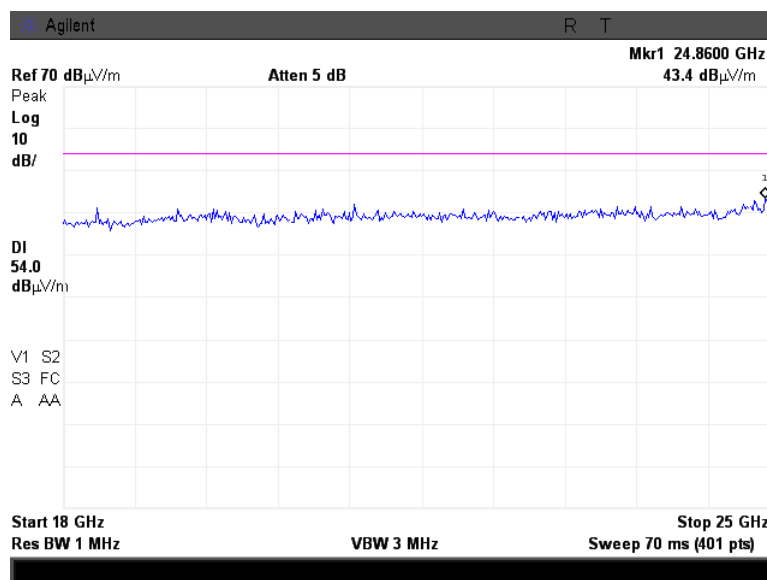

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			



Plot 7.1.21 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m

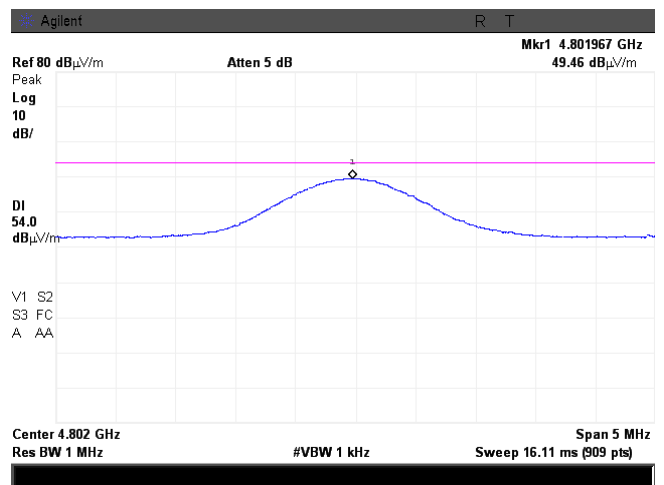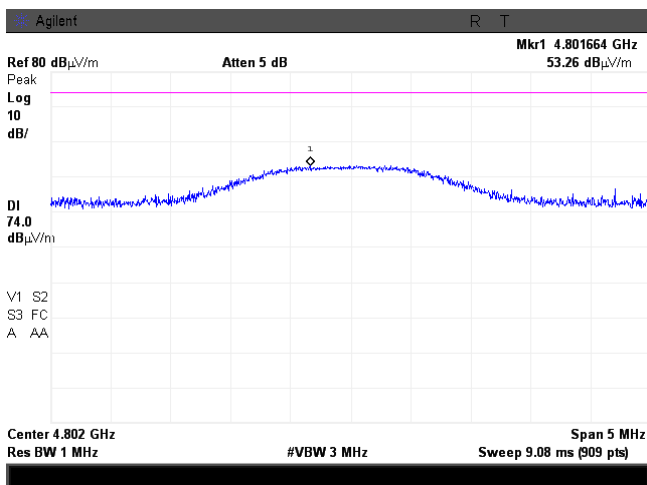

Plot 7.1.22 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m

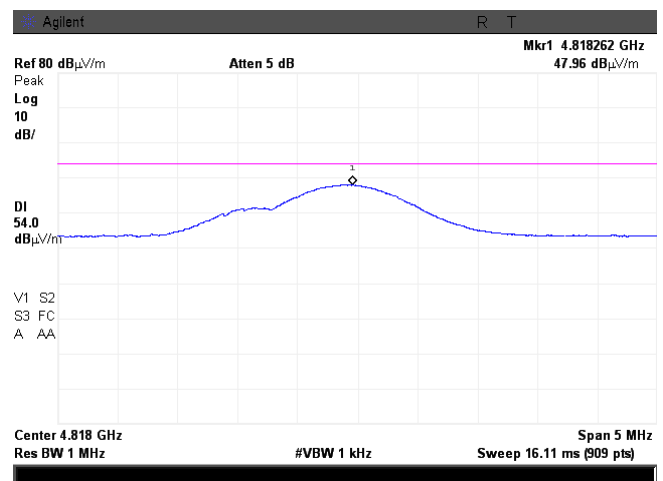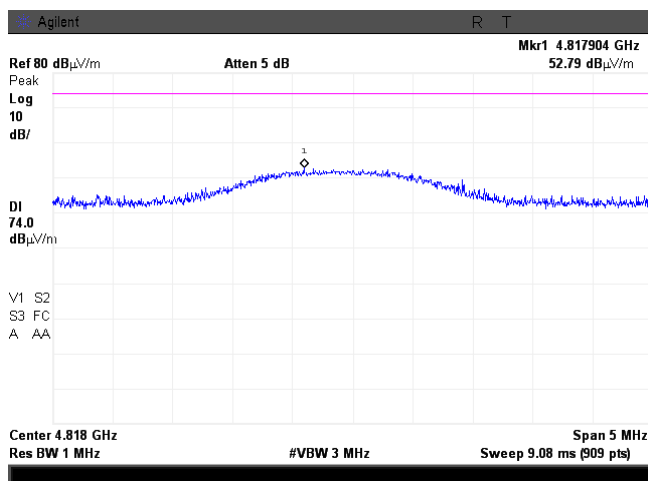





HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			



Plot 7.1.23 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m

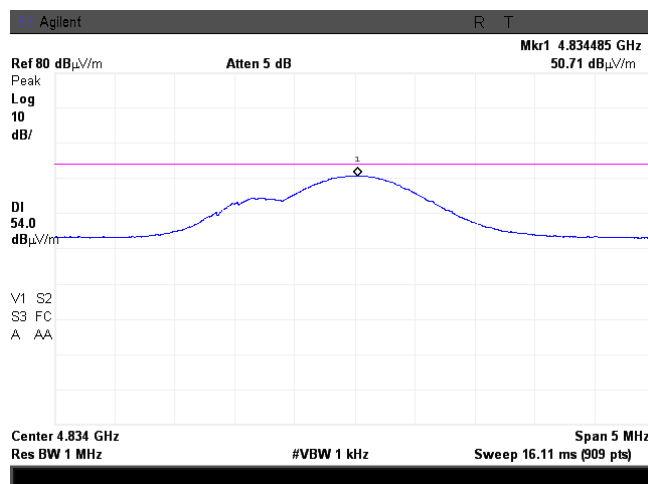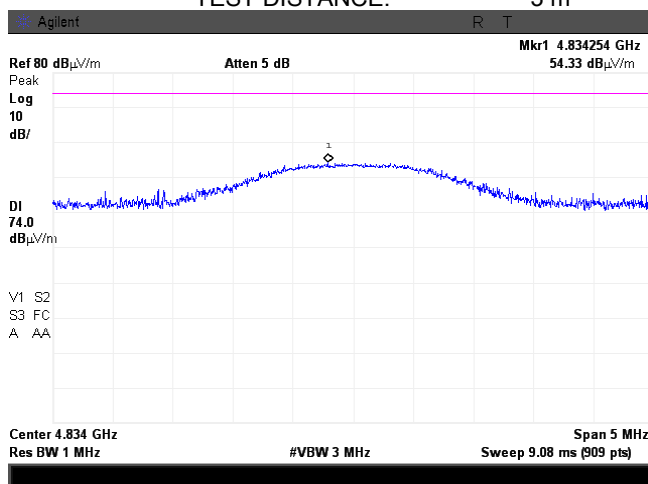

Plot 7.1.24 Radiated emission measurements at the third harmonic of low carrier frequency



TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m

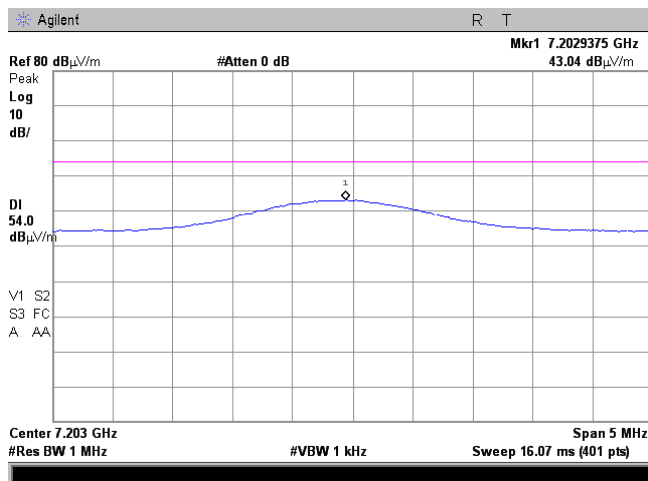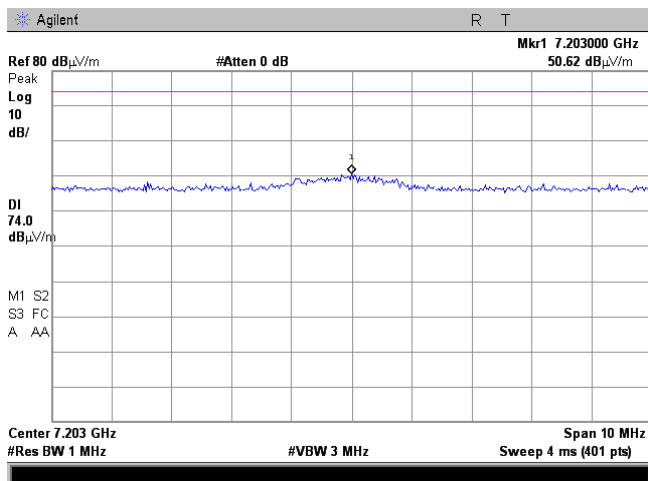

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			



Plot 7.1.25 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m

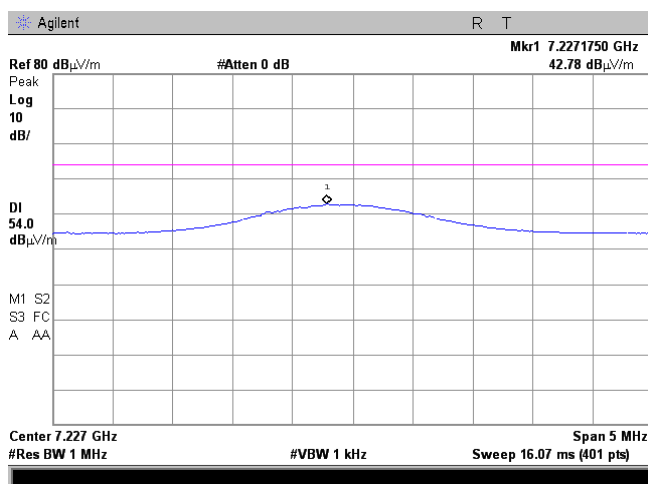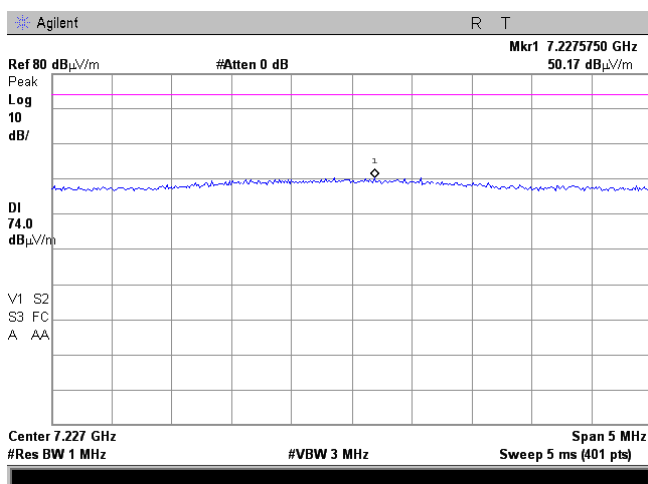

Plot 7.1.26 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m

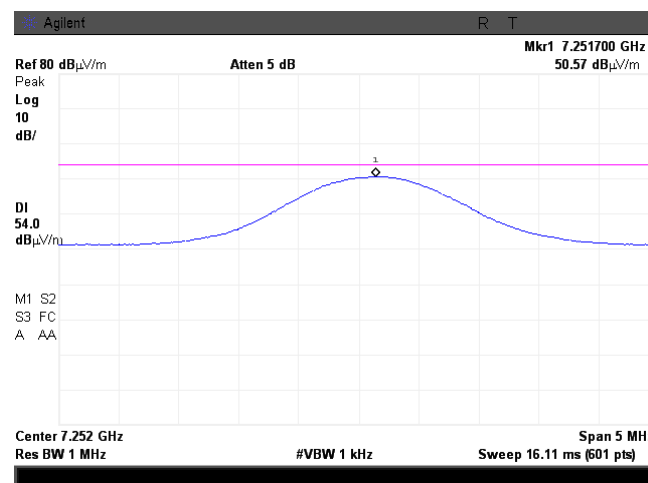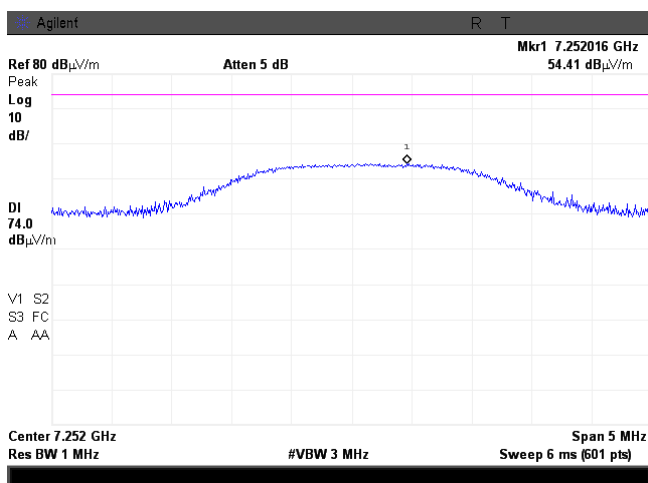





HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/2/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			

Plot 7.1.27 Transmission pulse duration

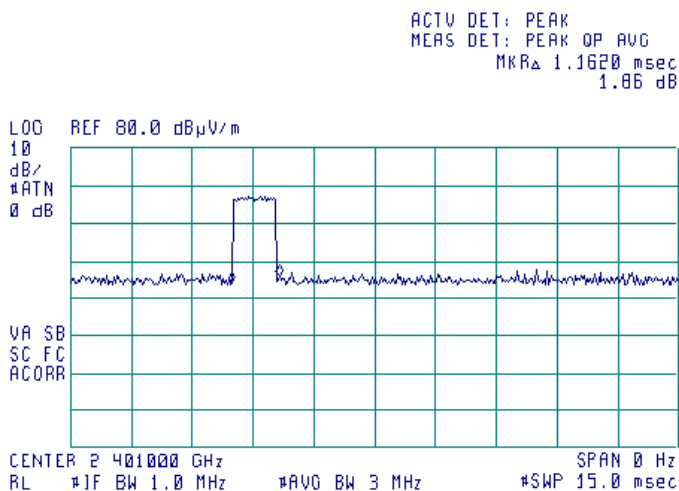

Plot 7.1.28 Transmission pulse period

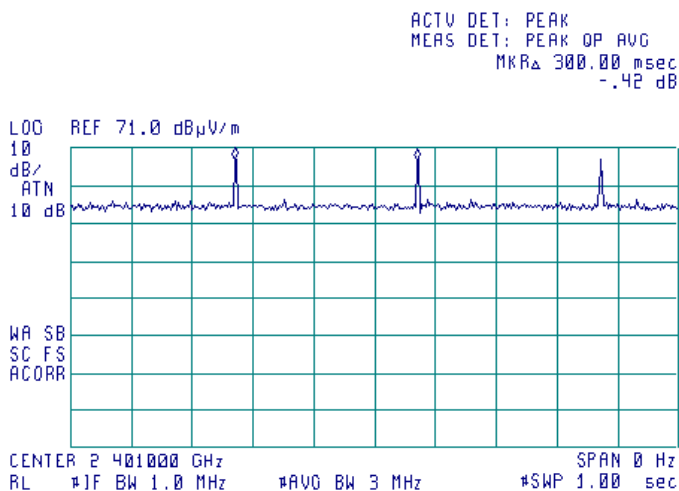



Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/3/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			

7.2 Band edge emission

7.2.1 General

This test was performed to verify the EUT band edge emission including all associated side bands was attenuated at least 50 dB below the unmodulated carrier level or below the general spurious emission limit. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Band edge emission limits

Frequency band, MHz	Field strength limit at 3 m, dBμV/m		Attenuation below carrier, dBc
	Peak	Average	
2400-2483.5	74.0	54.0	50

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1 energized and the performance check was conducted.


7.2.2.2 The spectrum analyzer frequency span was set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.

7.2.2.3 The frequency of modulation envelope points beyond which power level drops below the band edge emission limit was measured.

7.2.2.4 The test results were recorded in Table 7.2.2 and shown in the associated plots.

Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/3/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			

Figure 7.2.1 Band edge emission measurement set up

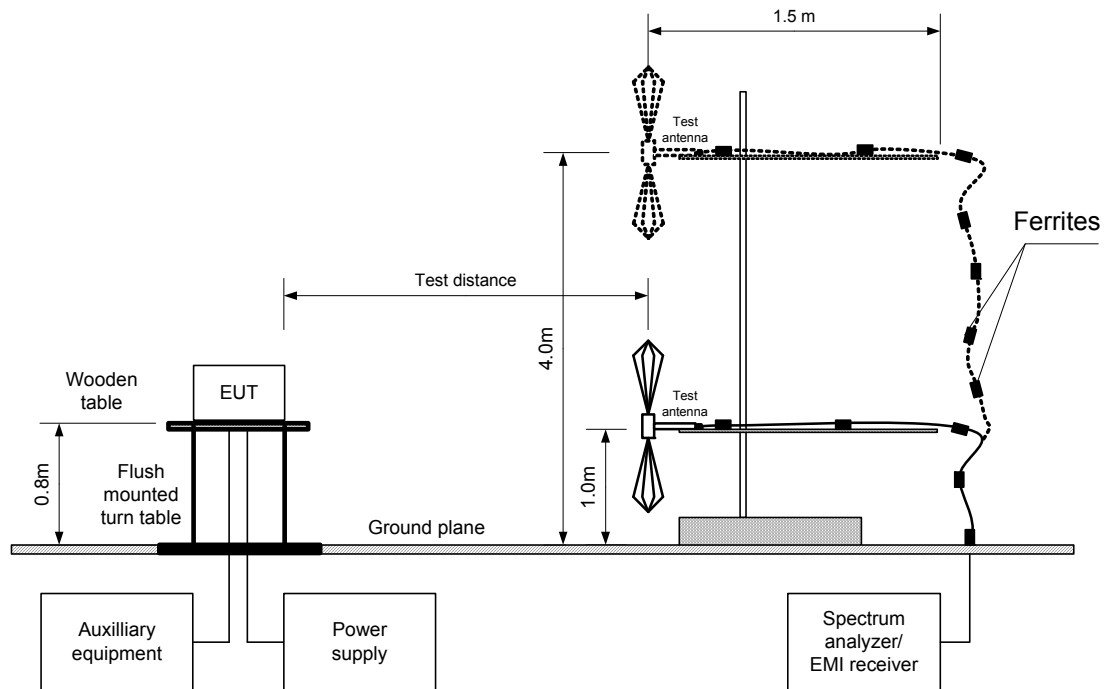



HERMON LABORATORIES

Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/3/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			

Table 7.2.2 Band edge emission test results

OPERATING FREQUENCY RANGE: 2400-2483.5 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 30 kHz
 VIDEO BANDWIDTH: 3 MHz
 MODULATION: MSK
 BIT RATE: 250 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Modulation envelope		Band edge limit, MHz	Margin, kHz***	Verdict
Edge	Frequency, MHz*			
Low	2400.570	2400.0	-570	Pass
High	2419.230	2483.5	-64270	Pass

* - Measured frequency beyond which the emission dropped 50 dB below the carrier emission or below the field strength limit whichever was a less stringent

** - Margin = Band edge limit – Band edge frequency

Reference numbers of test equipment used

HL 0521	HL 1984	HL 2871	HL 3617				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.





HERMON LABORATORIES

Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/3/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			

Plot 7.2.1 Low band edge emission test result


TEST SITE: Semi Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

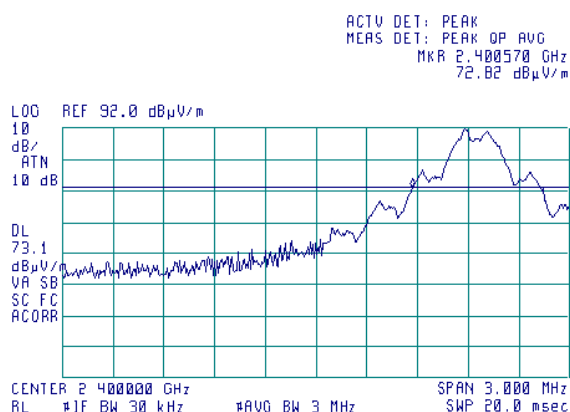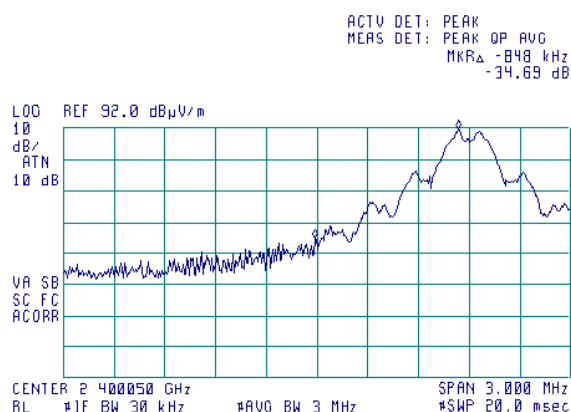

Field strength at low fundamental frequency is 92.62 dBμV/m
DL=91.72- (92.62-74) =73.1 dBμV/m according to Limit of spurious
Band edge frequency is 2400.570 MHz.

Plot 7.2.2 High band edge emission test result

TEST SITE: Semi Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

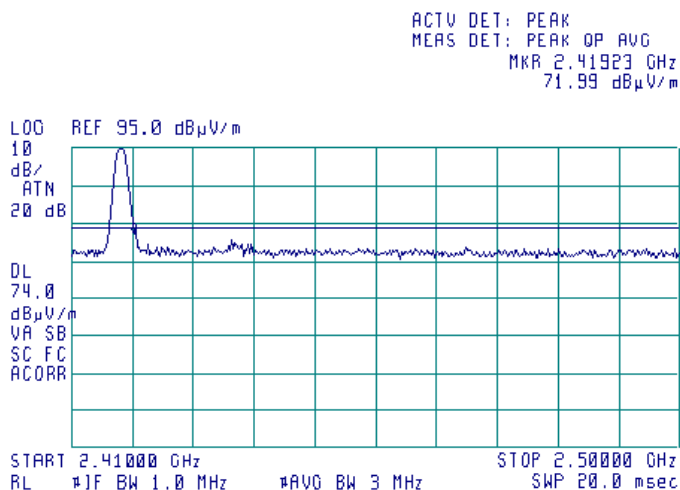



Test specification:		Section 15.203, Antenna requirement	
Test procedure:		Visual inspection / supplier declaration	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/7/2012	
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 42 %	Power Supply: Battery
Remarks:			

7.3 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.3.1.

Table 7.3.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Test specification:		Section 15.215(c), Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/3/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			

7.4 Occupied bandwidth test

7.4.1 General

This test was performed to verify that the 20 dB bandwidth of the emissions was contained within the standard specified frequency band according to FCC §15.215 requirements. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc
902 - 928	20.0
2400 – 2483.5	
5725 – 5875	
24000 – 24250	

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

7.4.2.2 The spectrum analyzer sweep time and bandwidth were set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.

7.4.2.3 The peak of emission was measured. The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.4.2 and the associated plot.

Figure 7.4.1 Occupied bandwidth test setup





HERMON LABORATORIES

Test specification:		Section 15.215(c), Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/3/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			

Table 7.4.2 Occupied bandwidth test results

ASSIGNED FREQUENCY BAND: 2400-2483.5 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATING SIGNAL: Enable

Band edge	Cross point frequency, MHz	Frequency drift, kHz		OBW, MHz	Assigned band edge, MHz	Verdict
		Negative	Positive			
Low	2400.460	NA	NA	995	2400.0	Pass
Mid	NA	NA	NA	950	NA	Pass
High	2417.715	NA	NA	955	248.3.5	Pass

Reference numbers of test equipment used

HL 0521	HL 1984	HL 2871	HL 3617					
---------	---------	---------	---------	--	--	--	--	--



Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.215(c), Occupied bandwidth			
Test procedure: ANSI C63.4, Section 13.1.7			
Test mode: Compliance	Verdict: PASS		
Date(s): 5/1/2012 - 5/3/2012			
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			

Plot 7.4.1 Occupied bandwidth test result at low frequency

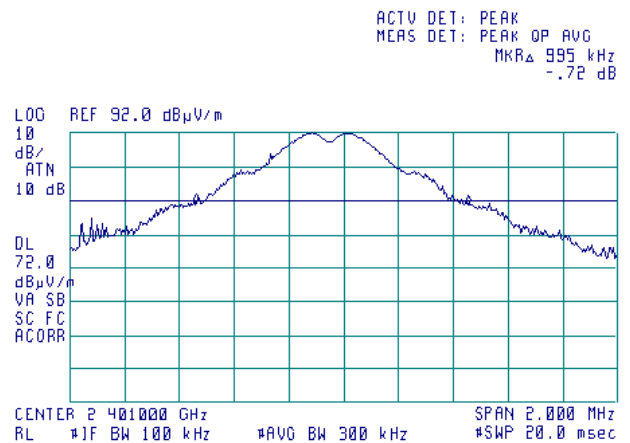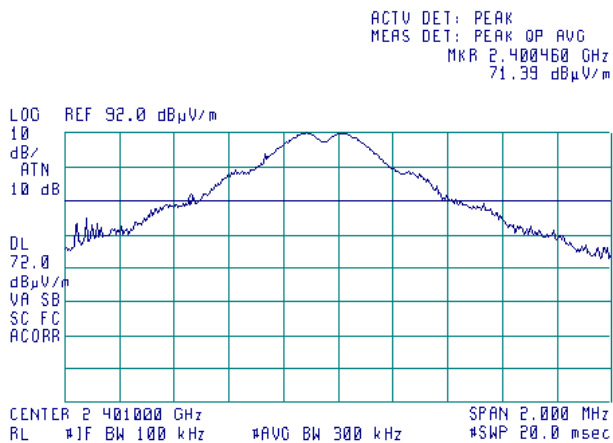

Plot 7.4.2 Occupied bandwidth test result at mid frequency


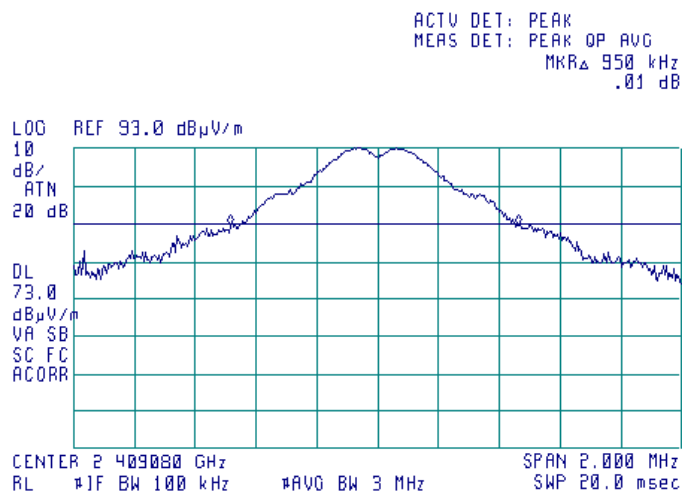




HERMON LABORATORIES

Test specification:		Section 15.215(c), Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/3/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 63 %	Power Supply: Battery
Remarks:			

Plot 7.4.3 Occupied bandwidth test result at high frequency

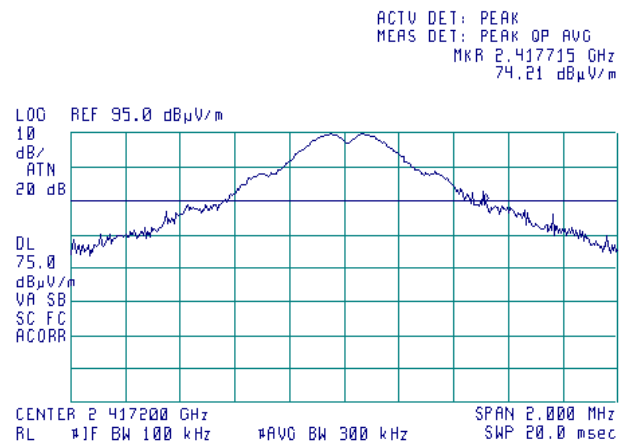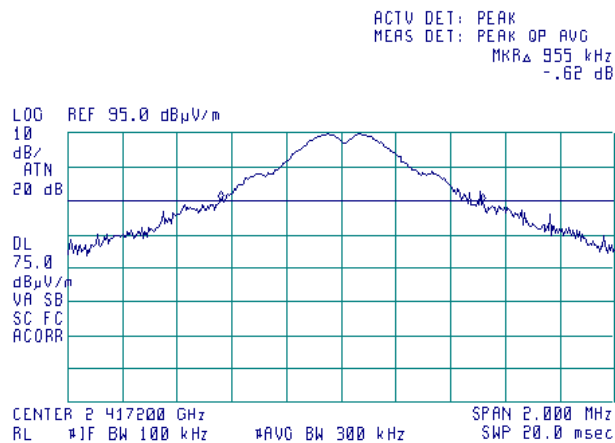



Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/3/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 65 %	Power Supply: Battery
Remarks:			

8 Emission tests according to 47CFR part 15 subpart B requirements

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μ V/m)		Class A limit, dB(μ V/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

8.1.2 Test procedure


8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.

8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.


8.1.2.3 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/3/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 65 %	Power Supply: Battery
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

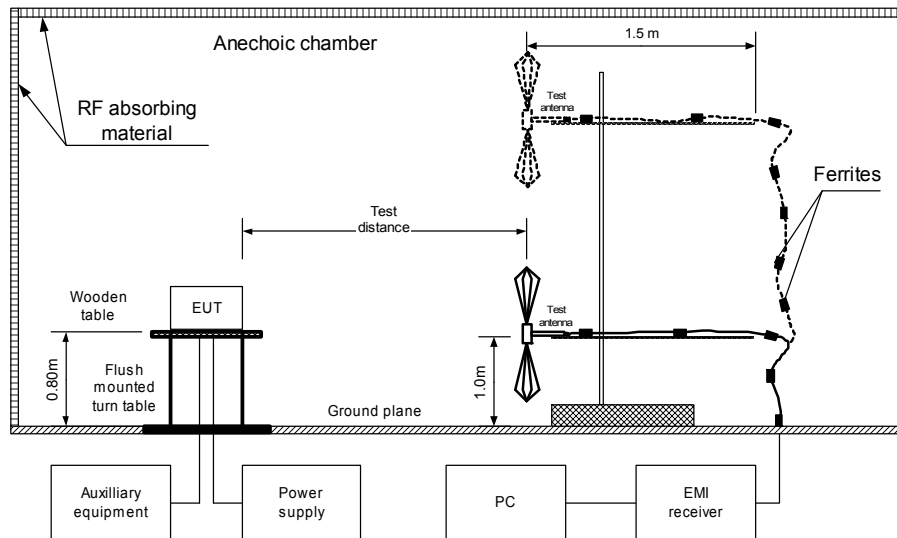

Photograph 8.1.1 Setup for radiated emission measurements

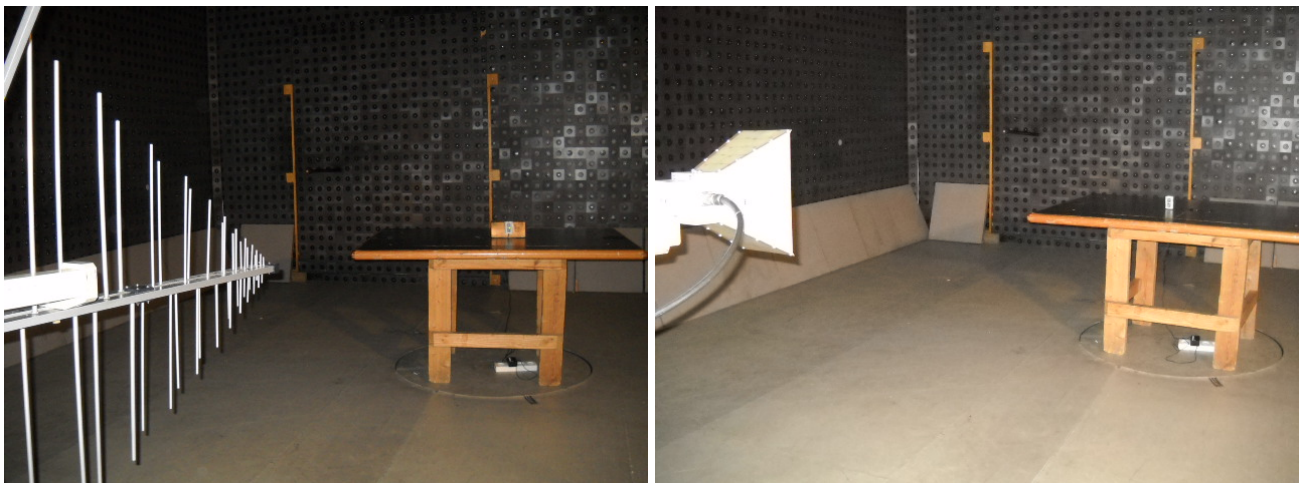



HERMON LABORATORIES

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/3/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 65 %	Power Supply: Battery
Remarks:			

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

RESOLUTION BANDWIDTH: 120 KHz								
Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No signals were found								Pass

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 12500 MHz
RESOLUTION BANDWIDTH: 1000 kHz

REGULATED BANDWIDTH:				1000 KHz			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
Frequency, MHz	Peak			Average						
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No signals were found										Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 1984	HL 2871	HL 2909	HL 3617	HL 4278	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/3/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 65 %	Power Supply: Battery
Remarks:			


Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
EUT OPERATING MODE: Receive

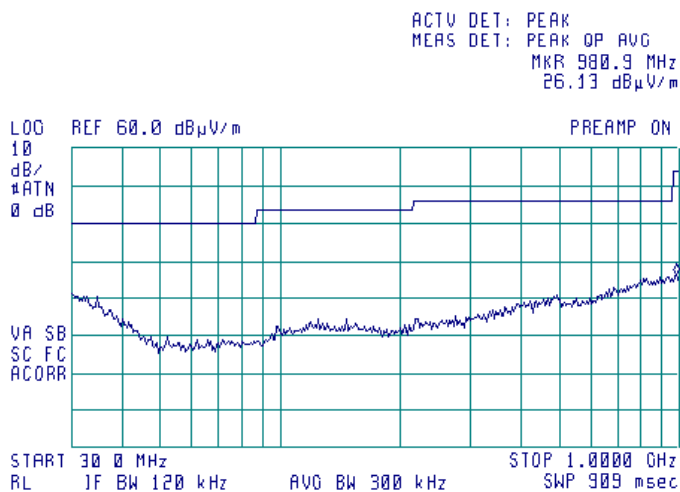

Plot 8.1.2 Radiated emission measurements 1000-2900 MHz

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
EUT OPERATING MODE: Receive

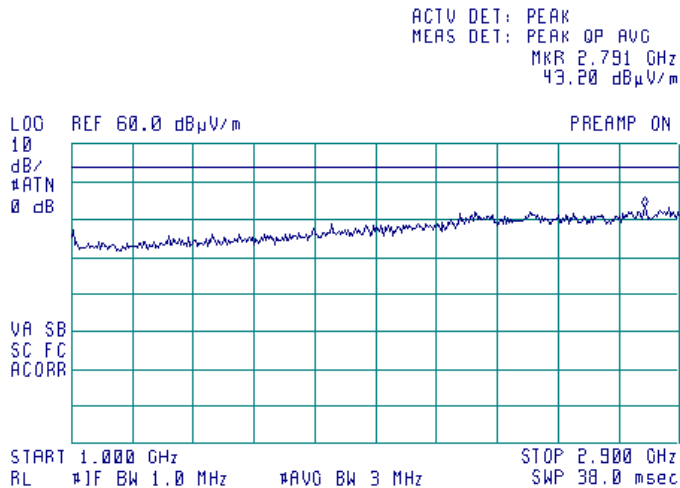


Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		5/1/2012 - 5/3/2012	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 65 %	Power Supply: Battery
Remarks:			

Plot 8.1.3 Radiated emission measurements 2.9 – 6.0 GHz

TEST SITE:
LIMIT:
TEST DISTANCE:
ANTENNA POLARIZATION:
EUT OPERATING MODE:


Semi anechoic chamber
Class B
3 m
Vertical & Horizontal
Receive / Stand-by

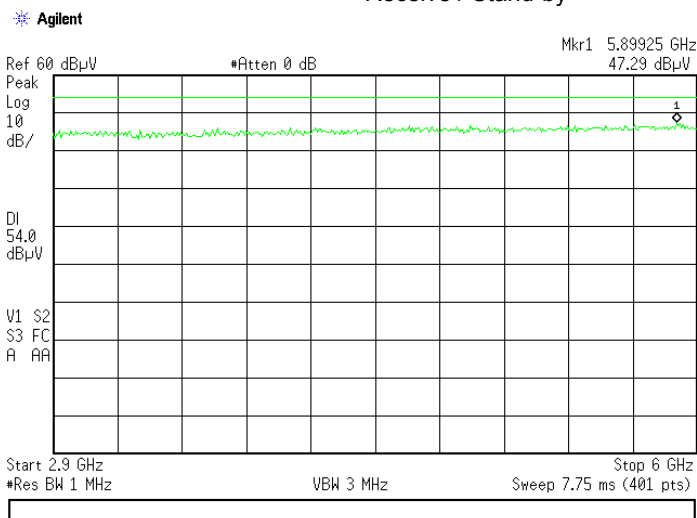

Plot 8.1.4 Radiated emission measurements 6.0 – 12.5 GHz

TEST SITE:
LIMIT:
TEST DISTANCE:
ANTENNA POLARIZATION:
EUT OPERATING MODE:

Semi anechoic chamber
Class B
3 m
Vertical & Horizontal
Receive / Stand-by

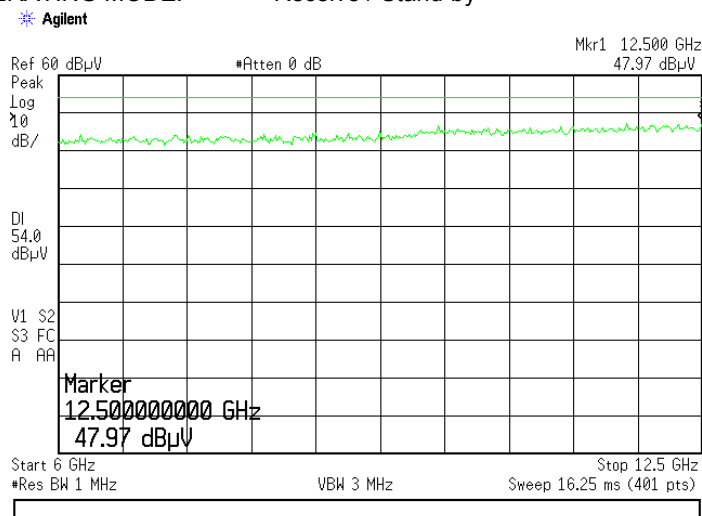

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	03-Jul-11	03-Jul-12
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	29-Aug-11	29-Sep-12
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-11	11-Jan-13
0768	Antenna Standard Gain Horn, 18-26.5 GHz, WR-42, 25 dB gain	Quinstar Technology	QWH-4200-BA	110	03-Feb-12	03-Feb-15
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	25-Nov-11	25-Nov-12
2432	Antenna, Double-Ridged Waveguide Horn 1-18 GHz	EMC Test Systems	3115	00027177	25-Nov-11	25-Nov-12
2697	Antenna, 30 MHz - 3.0 GHz	Sunol Sciences. Corp. Pleasanton, California USA	JB3	A022805	11-Jan-11	11-Jan-13
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	15-Jan-12	15-Jan-13
2882	Cable, 18 GHz N-type, M-F, 3 m	Bird Electronic Corp.	TC-MNFN-3.0	211539 001	30-Dec-11	30-Dec-12
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	08-May-12	08-May-13
3347	High Pass Filter, 50 Ohm, 6000 to 11500 MHz.	Mini-Circuits	VHF-5500+	NA	02-Oct-11	02-Oct-12
3390	Microwave Cable Assembly, 26.5 GHz, 1.0 m, N type/N type	Suhner Sucoflex	104EA	3390	07-Feb-12	07-Feb-13
3533	Amplifier, low noise, 6 to 18 GHz	Quinstar Technology	QLJ-06184040-J0	111590010 01	25-Dec-11	25-Dec-12
3535	Amplifier, low noise, 18 to 40 GHz	Quinstar Technology	QLJ-18404537-J0	111590030 01	11-Jul-11	11-Jul-12
3617	Cable RF, 6.5 m, N type-N type, DC-6.5 GHz	Suhner Switzerland	RG 214/U	NA	19-May-11	19-May-12
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1225/2A	08-Feb-12	08-Feb-13
4160	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type(f) in, N-type(m) out.	Agilent Technologies	87405C	MY470105 94	29-Jun-11	29-Jun-12
4222	High Pass Filter, 50 Ohm, 3150 to 6500 MHz	Mini-Circuits	VHF-2700+	NA	06-Oct-11	06-Oct-12
4278	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0755A	23-Nov-11	23-Nov-12

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
4338	Reject Band Filter, 50 Ohm, 0 to 2170 and 3000 to 18000 MHz, SMA-FM/SMA-M	Micro-Tronics	BRM 50702-02	023	23-Apr-12	23-Apr-13

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 10 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

47CFR part 15: 2011	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Standard gain horn antenna
Quinstar Technology, Model QWH
Ser.No.110, HL 0768

Frequency min, GHz	Frequency max, GHz	Antenna factor, dB(1/m)
18.000	26.500	32.01
26.500	40.000	35.48
40.000	60.000	39.03
60.000	90.000	42.55
90.000	140.000	46.23
140.000	220.000	50.11

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Double-ridged guide horn antenna
Model 3115, serial number: 00027177, HL 2432

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna calibration
Sunol Sciences Inc., model JB3, serial number A022805, HL 2697

Frequency, MHz	ACF, dB	Gain, dBi	Num gain	Frequency, MHz	ACF, dB	Gain, dBi	Num gain	Frequency, MHz	ACF, dB	Gain, dBi	Num gain	Frequency, MHz	ACF, dB	Gain, dBi	Num gain	Frequency, MHz	ACF, dB	Gain, dBi	Num gain
30	-22.2	-22.5	0.01	620	19.7	6.3	4.27	1215	24.9	7.0	5.05	1810	28.3	7.1	5.08	2405	30.9	6.9	4.93
35	-18.5	-17.4	0.02	625	19.7	6.5	4.42	1220	24.9	7.0	4.99	1815	28.5	6.9	4.91	2410	30.9	6.9	4.89
40	-14.7	-12.5	0.06	630	19.6	6.6	4.57	1225	25.1	6.9	4.91	1820	28.6	6.8	4.74	2415	31.0	6.9	4.85
45	-11.3	-8.1	0.16	635	19.7	6.5	4.48	1230	25.2	6.8	4.82	1825	28.7	6.8	4.75	2420	31.0	6.8	4.82
45	-11.3	-8.1	0.16	640	19.9	6.4	4.40	1235	25.1	7.0	4.96	1830	28.7	6.8	4.76	2425	31.1	6.8	4.81
50	-8.9	-4.7	0.34	645	19.9	6.5	4.45	1240	25.0	7.1	5.09	1835	28.7	6.7	4.72	2430	31.0	6.9	4.87
55	-7.9	-2.8	0.52	650	19.9	6.5	4.51	1245	25.0	7.1	5.12	1840	28.8	6.7	4.69	2435	31.0	6.9	4.86
60	-7.5	-2.1	0.62	655	19.9	6.6	4.60	1250	25.0	7.1	5.15	1845	28.6	6.9	4.90	2440	31.2	6.8	4.74
65	-8.5	-2.0	0.63	660	19.9	6.7	4.69	1255	25.0	7.2	5.25	1850	28.4	7.1	5.12	2445	31.1	6.9	4.91
70	-9.0	-1.9	0.64	665	19.9	6.7	4.70	1260	24.9	7.3	5.36	1855	28.5	7.0	5.07	2450	31.0	7.0	4.96
75	-8.8	-1.1	0.78	670	20.0	6.7	4.71	1265	25.0	7.3	5.31	1860	28.6	7.0	5.01	2455	31.0	7.0	5.01
80	-8.4	-0.2	0.97	675	20.1	6.7	4.71	1270	25.1	7.2	5.26	1865	28.5	7.1	5.17	2460	30.9	7.2	5.19
85	-8.0	0.6	1.20	680	20.1	6.7	4.71	1275	25.3	7.0	5.05	1870	28.4	7.3	5.33	2465	31.1	6.9	4.95
90	-8.2	1.1	1.29	685	20.1	6.8	4.79	1280	25.5	6.8	4.94	1875	28.4	7.2	5.28	2470	31.3	6.8	4.76
95	-9.2	0.5	1.13	690	20.1	6.9	4.88	1285	25.4	7.0	4.97	1880	28.5	7.2	5.22	2475	31.4	6.7	4.69
100	-10.6	-0.4	0.92	695	20.2	6.8	4.82	1290	25.3	7.1	5.10	1885	28.5	7.2	5.22	2480	31.3	6.8	4.79
110	-12.6	-1.6	0.70	705	20.4	6.8	4.75	1300	25.2	7.3	5.33	1895	28.6	7.2	5.24	2490	31.1	7.0	4.99
120	-13.9	-2.1	0.62	715	20.5	6.8	4.80	1310	25.5	7.1	5.09	1905	28.5	7.3	5.36	2500	30.9	7.2	5.27
125	-14.2	-2.0	0.63	720	20.5	6.9	4.85	1315	25.4	7.2	5.23	1910	28.5	7.4	5.45	2505	31.1	7.1	5.15
130	-14.2	-1.7	0.68	725	20.6	6.8	4.81	1320	25.3	7.3	5.36	1915	28.5	7.3	5.38	2510	31.0	7.2	5.22
140	-13.4	-0.3	0.94	735	20.9	6.7	4.55	1330	25.6	7.0	4.98	1925	28.6	7.3	5.39	2520	31.2	7.0	5.05
150	-12.9	0.8	1.21	745	21.0	6.6	4.59	1340	25.7	7.1	5.09	1935	28.5	7.4	5.54	2530	31.0	7.3	5.37
160	-12.7	1.6	1.44	755	21.0	6.8	4.74	1350	25.7	7.1	5.17	1945	28.5	7.5	5.59	2540	31.2	7.1	5.09
165	-12.5	2.0	1.59	760	21.0	6.8	4.83	1355	25.8	7.0	5.06	1950	28.6	7.4	5.48	2545	31.0	7.3	5.43
170	-12.2	2.6	1.83	765	21.1	6.8	4.73	1360	25.9	6.9	4.95	1955	28.6	7.5	5.57	2550	31.0	7.3	5.39
175	-11.8	3.3	2.13	770	21.3	6.7	4.64	1365	26.0	6.9	4.95	1960	28.6	7.5	5.65	2555	31.1	7.2	5.30
180	-11.6	3.7	2.36	775	21.3	6.7	4.68	1370	26.0	7.0	4.98	1965	28.7	7.4	5.47	2560	31.0	7.4	5.47
185	-11.5	4.0	2.54	780	21.3	6.7	4.72	1375	26.0	7.0	5.01	1970	28.5	7.2	5.29	2565	30.8	7.6	5.70
190	-11.6	4.2	2.61	785	21.3	6.8	4.77	1380	26.0	7.0	5.06	1975	28.9	7.2	5.22	2570	31.1	7.3	5.37
200	-13.1	3.2	2.07	795	21.4	6.8	4.79	1390	26.1	6.9	4.92	1985	29.1	7.1	5.11	2580	31.6	6.9	4.87
205	-12.0	4.4	2.76	800	21.5	6.8	4.77	1395	26.2	6.9	4.94	1990	29.1	7.0	5.06	2585	31.6	6.8	4.79
210	-11.0	5.6	3.66	805	21.6	6.7	4.71	1400	26.2	7.0	4.96	1995	29.1	7.1	5.09	2590	31.6	6.9	4.88
215	-11.3	5.6	3.59	810	21.7	6.7	4.65	1405	26.1	7.0	5.02	2000	29.1	7.1	5.11	2595	31.5	7.0	4.97
220	-11.6	5.5	3.52	815	21.7	6.7	4.72	1410	26.1	7.1	5.09	2005	29.1	7.1	5.16	2600	31.6	6.9	4.86
225	-11.7	5.5	3.45	820	21.7	6.8	4.80	1415	26.2	7.0	5.02	2010	29.1	7.1	5.15	2605	31.3	7.2	5.30
230	-11.9	5.5	3.57	825	21.7	6.8	4.82	1420	26.3	7.0	5.06	2015	29.2	7.1	5.13	2610	31.4	7.1	5.15
235	-12.1	5.5	3.56	830	21.7	6.9	4.85	1425	26.2	7.1	5.10	2020	29.2	7.1	5.18	2615	31.7	6.9	4.88
240	-12.3	5.5	3.54	835	21.8	6.8	4.82	1430	26.1	7.2	5.25	2025	29.3	7.1	5.08	2620	31.6	7.0	4.97
245	-12.3	5.7	3.71	840	21.9	6.8	4.80	1435	26.1	7.2	5.24	2030	29.3	7.0	5.05	2625	31.4	7.1	5.17
250	-12.3	5.9	3.88	845	21.9	6.8	4.83	1440	26.2	7.2	5.24	2035	29.3	7.1	5.07	2630	31.6	7.0	5.00
255	-12.5	5.9	3.85	850	21.9	6.9	4.86	1445	26.3	1	5.11	2040	29.3	7.1	5.13	2635	31.8	6.8	4.82
260	-12.7	5.8	3.83	855	22.0	6.8	4.80	1450	26.5	7.0	4.98	2045	29.2	7.2	5.23	2640	31.7	7.0	4.98
265	-13.2	5.5	3.54	860	22.1	6.8	4.74	1455	26.4	7.1	5.07	2050	29.2	7.2	5.27	2645	31.7	6.9	4.93
270	-13.7	5.2	3.27	865	22.1	6.9	4.82	1460	26.4	7.1	5.17	2055	29.3	7.2	5.21	2650	31.8	6.9	4.85
275	-13.7	5.3	3.39	870	21.9	7.1	5.11	1465	26.4	7.2	5.19	2060	29.5	7.0	5.02	2655	31.8	6.9	4.85
280	-13.7	5.4	3.50	875	22.0	7.1	5.08	1470	26.4	7.2	5.22	2065	29.4	7.1	5.08	2660	31.7	7.0	5.02
285	-13.7	5.6	3.61	880	22.1	7.0	5.05	1475	26.4	7.1	5.17	2070	29.4	7.1	5.01	2665	32.0	6.7	4.71
290	-13.7	5.7	3.72	885	22.1	7.0	5.06	1480	26.5	7.1	5.12	2075	29.5	7.0	5.01	2670	32.0	6.7	4.67
295	-13.8	5.8	3.77	890	22.1	7.0	5.06	1485	26.5	7.1	5.14	2080	29.8	6.8	4.76	2675	31.9	6.8	4.81
300	-13.9	5.8	3.81	895	22.2	7.1	5.09	1490	26.5	7.1	5.17	2085	29.7	6.9	4.89	2680	31.7	7.0	5.04
305	-14.0	5.9	3.85	900	22.2	7.1	5.12	1495	26.5	7.2	5.24	2090	29.7	6.9	4.86	2685	31.9	6.8	4.83
310	-14.1	5.9	3.88	905	22.3	7.1	5.09	1500	26.5	7.2	5.31	2095	29.8	6.8	4.78	2690	32.1	6.7	4.72
315	-14.3	5.8	3.88	910	22.3	7.0	5.05	1505	26.5	7.2	5.27	2100	29.8	6.8	4.75	2695	32.1	6.7	4.71
320	-14.4	5.9	3.90	915	22.4	7.0	4.99	1510	26.6	7.2	5.30	2105	29.8	6.8	4.81	2700	32.0	6.8	4.81
325	-14.5	5.9	3.92	920	22.6	6.9	4.92	1515	26.6	7.2	5.37	2110	29.9	6.8	4.78	2705	32.0	6.8	4.80
330	-14.6	5.9	3.93	925	22.7	6.9	4.85	1520	26.5	7.3	5.38	2115	29.9	6.8	4.76	2710	32.1	6.8	4.79
335	-14.7	6.0	4.02	930	22.8	6.8	4.77	1525	26.6	7.3	5.37	2120	29.9	6.8	4.84	2715	32.1	6.7	4.71
340	-14.7	6.2	4.12	935	22.8	6.8	4.83	1530	26.6	7.3	5.36	2125	29.9	6.9	4.89	2720	32.4	6.5	4.47
345	-14.9	6.1	4.06	940	22.8	6.9	4.89	1535	26.6	7.4	5.44	2130	29.9	6.9	4.90	2725	32.2	6.7	4.63
350	-15.1	6.0	3.99	945	22.8	6.9	4.87	1540	26.5	7.4	5.53	2135	29.8	6.9	4.94	2730	31.9	7.0	5.05
355	-15.3	5.9	3.88	950	22.9	6.9	4.85	1545	26.5	7.5	5.58	2140	29.8	7.1	5.08	2735	31.6	7.4	5.44
360	-15.8	5.8	3.78	955	23.0	6.8	4.81	1550	26.6	7.5	5.63	2145	29.8	6.9	4.92	2740	31.6	7.1	5.40
365	-15.5	5.9	3.89	960	23.1	6.8	4.77	1555	26.7	7.3	5.39	2150	29.9	7.0	4.98	2745	31.9	7.0	5.06
370	-15.5	6.0	4.01	965	23.1	6.7	4.73	1560	26.9	7.1	5.18	2155	29.8	7.1	5.10	2750	32.0	6.9	4.94
375	-15.6	6.1	4.03	970	23.2	6.7	4.69	1565	26.9	7.2	5.23	2160	29.8	7.1	5.09	2755	32.0	7.0	4.98
380	-15.7	6.1	4.05	975	23.3	6.6	4.62	1570	26.9	7.2	5.30	2165	29.9	7.0	5.00	2760	32.0	7.0	5.06
385	-15.7	6.2	4.15	980	23.5	6.6	4.54	1575	27.0	7.2	5.23	2170	29.9	7.1	5.07	2765	32.2	6.8	4.80
390	-15.7	6.3	4.25	985	23.5	6.6	4.52	1580	27.0	7.1	5.17	2175	29.8	7.2	5.20	2770	32.3	6.8	4.73</

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55

Cable loss
Cable coaxial, Bird, 18 GHz, N-type, M-F, model TC-MNFN-3.0, S/N 211539 001
HL 2882

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.08	5750	1.78	12000	2.57
30	0.12	6000	1.84	12250	2.62
100	0.22	6250	1.87	12500	2.66
250	0.35	6500	1.92	12750	2.68
500	0.49	6750	1.96	13000	2.67
750	0.60	7000	2.01	13250	2.75
1000	0.68	7250	2.08	13500	2.77
1250	0.78	7500	2.12	13750	2.90
1500	0.85	7750	2.19	14000	3.00
1750	0.92	8000	2.22	14250	3.12
2000	0.98	8250	2.28	14500	2.98
2250	1.06	8500	2.29	14750	3.03
2500	1.11	8750	2.27	15000	2.99
2750	1.19	9000	2.28	15250	2.99
3000	1.25	9250	2.26	15500	2.98
3250	1.30	9500	2.29	15750	2.98
3500	1.34	9750	2.33	16000	2.99
3750	1.40	10000	2.34	16250	3.05
4000	1.45	10250	2.41	16500	3.11
4250	1.51	10500	2.46	16750	3.18
4500	1.54	10750	2.48	17000	3.23
4750	1.59	11000	2.48	17250	3.21
5000	1.63	11250	2.52	17500	3.22
5250	1.68	11500	2.53	17750	3.22
5500	1.72	11750	2.56	18000	3.25

Cable loss
Cable coaxial, Microwave Cable Assembly, 104EA, 18 GHz, 1.0 m
Suhner Sucoflex, HL 3390

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.03	4800	0.55	9800	0.89	14900	1.07
30	0.04	4900	0.56	9900	0.89	15000	1.07
50	0.05	5000	0.57	10000	0.86	15100	1.08
100	0.07	5100	0.58	10100	0.86	15200	1.07
200	0.10	5200	0.58	10200	0.88	15300	1.09
300	0.12	5300	0.59	10300	0.92	15400	1.10
400	0.14	5400	0.59	10400	0.94	15500	1.10
500	0.16	5500	0.60	10500	0.96	15600	1.12
600	0.17	5600	0.61	10600	0.93	15700	1.15
700	0.18	5700	0.61	10700	0.89	15800	1.15
800	0.20	5800	0.63	10800	0.89	15900	1.17
900	0.21	5900	0.63	10900	0.88	16000	1.14
1000	0.23	6000	0.64	11000	0.92	16100	1.14
1100	0.24	6100	0.64	11100	0.91	16200	1.15
1200	0.25	6200	0.64	11200	0.89	16300	1.14
1300	0.27	6300	0.65	11300	0.88	16400	1.13
1400	0.28	6400	0.65	11400	0.88	16500	1.13
1500	0.28	6500	0.66	11500	0.90	16600	1.13
1600	0.30	6600	0.67	11600	0.94	16700	1.14
1700	0.31	6700	0.67	11700	0.96	16800	1.14
1800	0.32	6800	0.67	11800	0.92	16900	1.14
1900	0.33	6900	0.68	11900	0.92	17000	1.14
2000	0.34	7000	0.67	12000	0.91	17100	1.15
2100	0.35	7100	0.68	12100	0.92	17200	1.14
2200	0.35	7200	0.69	12200	0.95	17300	1.15
2300	0.36	7300	0.69	12300	0.98	17400	1.15
2400	0.37	7400	0.68	12400	0.96	17500	1.16
2500	0.39	7500	0.69	12500	0.99	17600	1.16
2600	0.40	7600	0.70	12600	0.96	17700	1.16
2700	0.41	7700	0.71	12700	0.93	17800	1.19
2800	0.42	7800	0.72	12800	0.94	17900	1.21
2900	0.42	7900	0.72	12900	0.98	18000	1.25
3000	0.43	8000	0.72	13000	0.99		
3100	0.44	8100	0.73	13100	0.99		
3200	0.45	8200	0.74	13200	0.99		
3300	0.46	8300	0.75	13300	0.99		
3400	0.46	8400	0.74	13400	1.00		
3500	0.47	8500	0.73	13500	1.02		
3600	0.47	8600	0.73	13600	1.05		
3700	0.47	8700	0.75	13700	1.03		
3800	0.49	8800	0.77	13800	1.02		
3900	0.49	8900	0.77	13900	1.03		
4000	0.50	9000	0.77	14000	1.03		
4100	0.51	9100	0.77	14100	1.05		
4200	0.52	9200	0.78	14200	1.05		
4300	0.52	9300	0.80	14300	1.04		
4400	0.53	9400	0.82	14400	1.03		
4500	0.53	9500	0.82	14600	1.06		
4600	0.54	9600	0.83	14700	1.07		
4700	0.56	9700	0.89	14800	1.08		

Cable loss
Cable coaxial, RG-214/U, N type-N type, 6.5 m
Suhner Switzerland, HL 3617

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	2200	2.97	4500	5.10
50	0.33	2300	3.06	4600	5.20
100	0.48	2400	3.16	4700	5.34
200	0.71	2500	3.23	4800	5.36
300	0.89	2600	3.34	4900	5.48
400	1.04	2700	3.42	5000	5.52
500	1.19	2800	3.52	5100	5.61
600	1.32	2900	3.61	5200	5.72
700	1.44	3000	3.69	5300	5.81
800	1.56	3100	3.80	5400	5.93
900	1.68	3200	3.86	5500	6.08
1000	1.80	3300	3.98	5600	6.12
1100	1.90	3400	4.07	5700	6.25
1200	2.00	3500	4.14	5800	6.31
1300	2.11	3600	4.27	5900	6.41
1400	2.21	3700	4.36	6000	6.51
1500	2.30	3800	4.47	6100	6.62
1600	2.40	3900	4.62	6200	6.73
1700	2.49	4000	4.63	6300	6.86
1800	2.61	4100	4.76	6400	6.94
1900	2.69	4200	4.83	6500	7.06
2000	2.79	4300	4.89		
2100	2.88	4400	5.04		

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A
HL 3901

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52

Cable loss
Test cable, Mini-Circuits, S/N 0755A, 18 GHz, 4.6 m, N/M - N/M
APC-15FT-NMNM+, HL 4278

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.24	5000	4.25	10200	6.52	15400	8.40
30	0.26	5100	4.29	10300	6.57	15500	8.42
50	0.34	5200	4.32	10400	6.59	15600	8.46
100	0.50	5300	4.38	10500	6.61	15700	8.50
200	0.72	5400	4.41	10600	6.64	15800	8.52
300	0.90	5500	4.46	10700	6.64	15900	8.56
400	1.06	5600	4.51	10800	6.65	16000	8.61
500	1.20	5700	4.56	10900	6.68	16100	8.64
600	1.32	5800	4.59	11000	6.68	16200	8.66
700	1.44	5900	4.64	11100	6.69	16300	8.70
800	1.54	6000	4.69	11200	6.70	16400	8.73
900	1.64	6100	4.72	11300	6.74	16500	8.74
1000	1.74	6200	4.77	11400	6.78	16600	8.75
1100	1.83	6300	4.80	11500	6.81	16700	8.78
1200	1.92	6400	4.83	11600	6.84	16800	8.79
1300	2.01	6500	4.89	11700	6.87	16900	8.81
1400	2.09	6600	4.90	11800	6.92	17000	8.85
1500	2.18	6700	4.95	11900	6.98	17100	8.90
1600	2.25	6800	5.01	12000	7.02	17200	8.95
1700	2.33	6900	4.99	12100	7.08	17300	8.99
1800	2.39	7000	5.04	12200	7.15	17400	9.03
1900	2.47	7100	5.11	12300	7.20	17500	9.07
2000	2.53	7200	5.14	12400	7.26	17600	9.11
2100	2.60	7300	5.21	12500	7.31	17700	9.15
2200	2.67	7400	5.29	12600	7.36	17800	9.19
2300	2.73	7500	5.33	12700	7.41	17900	9.24
2400	2.80	7600	5.38	12800	7.46	18000	9.28
2500	2.87	7700	5.46	12900	7.51		
2600	2.93	7800	5.52	13000	7.55		
2700	3.00	7900	5.58	13100	7.59		
2800	3.06	8000	5.64	13200	7.65		
2900	3.12	8100	5.69	13300	7.69		
3000	3.18	8200	5.75	13400	7.72		
3100	3.24	8300	5.80	13500	7.78		
3200	3.30	8400	5.84	13600	7.82		
3300	3.35	8500	5.90	13700	7.86		
3400	3.42	8600	5.97	13800	7.91		
3500	3.46	8700	5.99	13900	7.96		
3600	3.52	8800	6.04	14000	8.01		
3700	3.57	8900	6.10	14100	8.06		
3800	3.61	9000	6.13	14200	8.10		
3900	3.67	9100	6.17	14300	8.13		
4000	3.71	9200	6.23	14400	8.16		
4100	3.77	9300	6.27	14500	8.19		
4200	3.83	9400	6.30	14600	8.21		
4300	3.89	9500	6.35	14700	8.23		
4400	3.94	9600	6.37	14800	8.26		
4500	4.00	9700	6.40	14900	8.28		
4600	4.05	9800	6.44	15000	8.30		
4700	4.10	9900	6.45	15100	8.33		
4800	4.16	10000	6.47	15200	8.35		
4900	4.19	10100	6.50	15300	8.37		

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT