



Test Report

Product Name : Digital Still Camera
Model No. : DSC-S730
FCC ID : TVRDSCS730

Applicant : Hon Hai Precision Industry Co., Ltd. Nei-Hu Branch Office
Address : 1~11 F., No.32, Ji-hu Rd., Nei-hu, Taipei 114, Taiwan,
R.O.C.

Date of Receipt : 2007/08/16
Issued Date : 2007/08/30
Report No. : 078225R-ITUSP01V02

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by CNLA, NVLAP, NIST or any agency of the Government.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : 2007/08/30
 Report No. : 078225R-ITUSP01V02



Product Name : Digital Still Camera
 Applicant : Hon Hai Precision Industry Co., Ltd. Nei-Hu Branch Office
 Address : 1~11 F., No.32, Ji-hu Rd., Nei-hu, Taipei 114, Taiwan, R.O.C.
 Manufacturer : Hon Hai Precision Industry Co., Ltd. Nei-Hu Branch Office
 Model No. : DSC-S730
 Rated Voltage : AC 120 V / 60 Hz
 EUT Voltage : AC 120 V / 60 Hz
 Trade Name : SONY
 Applicable Standard : FCC CFR Title 47 Part 15 Subpart B: 2006 Class B,
 CISPR 22: 2006
 Test Result : Complied
 Performed Location : Hsinchu EMC Laboratory
 N0. 75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin
 Shiang, Hsinchu County 307, Taiwan, R.O.C.
 TEL:+886-3-592-8858 / FAX:+886-3-592-8859

Documented By : Carol Tsai
 (Carol Tsai / Engineering Adm. Specialist)

Reviewed By : John Lee
 (John Lee / Assistant Engineer)

Approved By : Arthur Liu
 (Arthur Liu / Deputy Manager)

Laboratory Information

We , **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited by the following accreditation Bodies in compliance with ISO 17025, EN 45001 and Guide 25:

Taiwan R.O.C.	:	BSMI, DGT, CNLA
Germany	:	TUV Rheinland
Norway	:	Nemko, DNV
USA	:	FCC, NVLAP
Japan	:	VCCI

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://tw.quietek.com/modules/myalbum/>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.

TEL:+886-3-592-8858 / FAX:+886-3-592-8859

E-Mail : service@quietek.com



LinKou Testing Laboratory :

No. 5, Ruei-Shu Valley, Ruei-Ping Tsuen, Lin-Kou Shiang, Taipei, Taiwan, R.O.C.

TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789

E-Mail : service@quietek.com



TABLE OF CONTENTS

Description	Page
1. General Information	5
1.1. EUT Description	5
1.2. Mode of Operation	6
1.3. Tested System Details.....	7
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	10
2. Technical Test.....	11
2.1. Summary of Test Result	11
2.2. List of Test Equipment.....	11
2.3. Measurement Uncertainty	12
2.4. Test Environment	12
3. Conducted Emission	13
3.1. Test Specification	13
3.2. Test Setup	13
3.3. Limit.....	13
3.4. Test Procedure	14
3.5. Test Result	15
3.6. Test Photograph	31
4. Radiated Emission	35
4.1. Test Specification	35
4.2. Test Setup	35
4.3. Limit.....	36
4.4. Test Procedure	37
4.5. Test Result	38
4.6. Test Photograph	54
5. Attachment.....	62
EUT Photograph.....	62

1. General Information

1.1. EUT Description

Product Name	Digital Still Camera
Trade Name	SONY
Model No.	DSC-S730

Component	
USB Cable	Shielded, 1.5m, one ferrite core bonded.
AV Cable	Non-Shielded, 1.5m, one ferrite core bonded.
Battery Cable	Non-Shielded, 0.15m
Power Adapter	SONY, AC-LS5 Cable Out: Non-Shielded, 1.7m Power Cord: Non-Shielded, 1.8m

Note:

1. This EUT is a Digital Still Camera.

1.2. Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode	
Mode 1: Slide show Mode 2: REC Mode 3: USB-LCD On Mode 4: Preview	
Final Test Mode	
Emission	Mode 1: Slide show Mode 2: REC Mode 3: USB-LCD On Mode 4: Preview


1.3. Tested System Details


The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Test Mode		Mode 1: Slide show Mode 2: REC Mode 4: Preview				
Product		Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
1	Monitor	SONY	PVM-14M2U	2111391	DoC	Non-Shielded, 1.8m

Test Mode		Mode 3: USB-LCD On				
Product		Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
1	Printer	HP	C2642A	TH86M1M34W	DoC	Non-Shielded, 0.7m
2	Notebook PC	DELL	PP10L	3Y220	E2K24BNHM	Non-Shielded, 1.8m
3	Microphone & Earphone	TOKTO	SX-MI	N/A	DoC	--
4	USB 2.0 Flash Memory	Sony	USM2GJX	N/A	DoC	--
5	Monitor	CHI MEI	A170E1-09	3UC120955SA1227	DoC	Non-Shielded, 1.8m
6	2.5" HDD Portable Enclosure	Terabit	TB-25U2	N/A	DoC	--
7	Modem	ACEEX	DM-1414	980033038	DoC	Non-Shielded, 1.6m
8	Monitor	SONY	PVM-14M2U	2111376	DoC	Non-Shielded, 1.8m

1.4. Configuration of Tested System

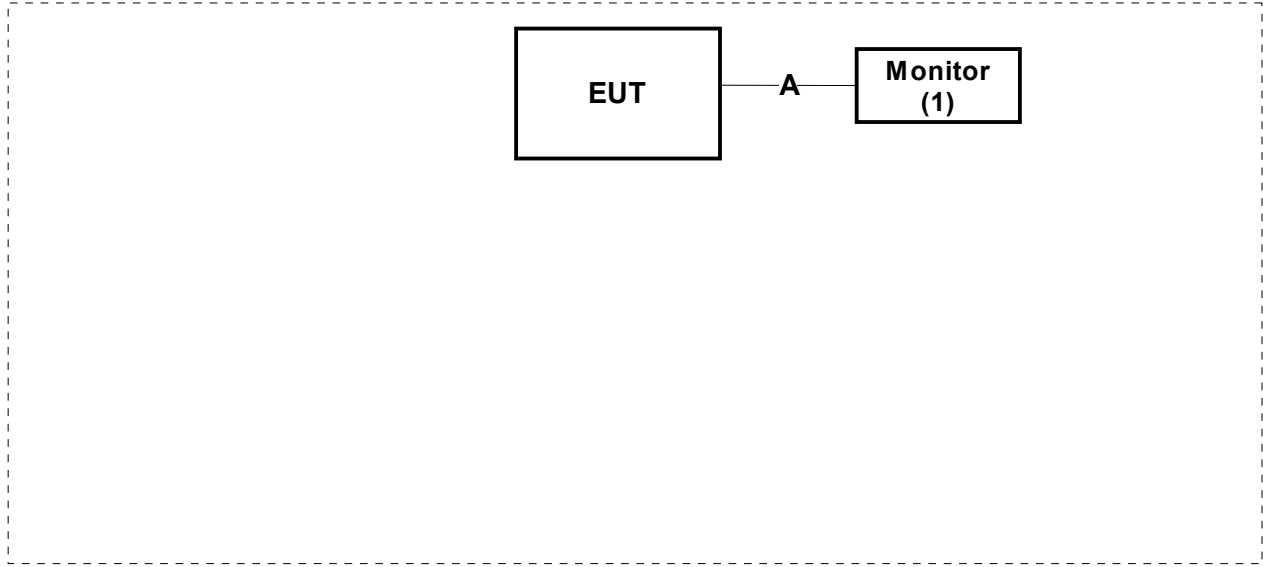Test Mode	Mode 1: Slide show Mode 2: REC Mode 4: Preview		
Connection Diagram			
 <pre> graph LR EUT[EUT] --- A[A] --- Monitor["Monitor (1)"] </pre>			
Signal Cable Type		Signal cable Description	Interface
A	AV Cable	Non-Shielded, 1.5m, one ferrite core bonded.	AV Port

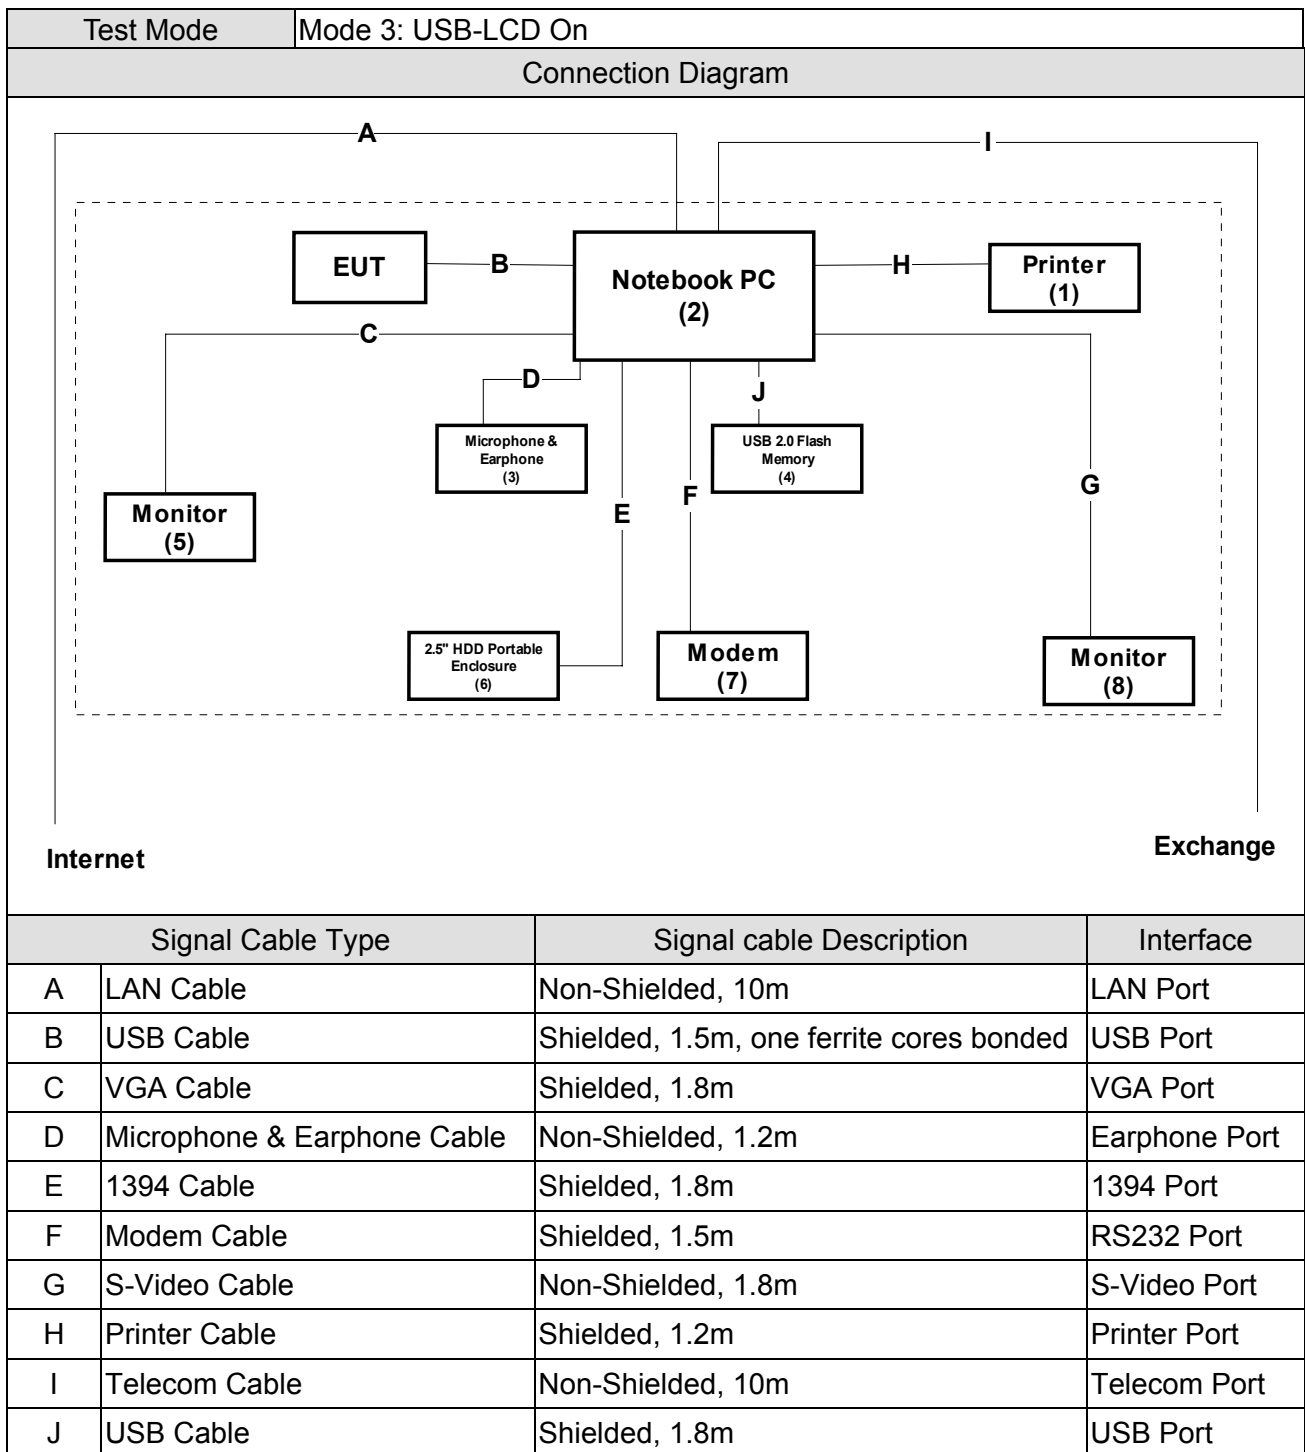

2. Technical Test

2.1. Summary of Test Result

- No deviations from the test standards
 Deviations from the test standards as below description:

Emission			
Performed Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart B: 2006 Class B, CISPR 22: 2006, ANSI C63.4: 2003	Yes	No
Radiated Emission	FCC CFR Title 47 Part 15 Subpart B: 2006 Class B, CISPR 22: 2006, ANSI C63.4: 2003	Yes	No

2.2. List of Test Equipment

Conducted Emission / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
4-Wire ISN	R & S	ENY 41	837032/001	2007/04/15
Double 2-Wire ISN	R & S	ENY 22	835354/008	2007/04/15
LISN	R&S	ESH3-Z5	836679/022	2007/06/17
LISN	R & S	ESH3-Z5	836679/013	2006/12/30
Pulse Limiter	R & S	ESH3-Z2	100411	2006/11/16
Test Receiver	R & S	ESCS 30	100149	2006/11/15

Radiated Emission / Site2

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Bilog Antenna	Schaffner Chase	CBL6112B	2708	2006/09/03
Horn Antenna	Electro Metrics	EM-6961	103325	2007/03/15
Pre-Amplifier	HP	8449B	3008A01123	2006/11/15
Pre-Amplifier	QuieTek	AP-025C	002	N/A
Spectrum Analyzer	R & S	FSP40	100005	2007/08/25
Spectrum Analyzer	Advantest	R3162	121200166	2007/02/19
Test Receiver	R & S	ESCS 30	836858/023	2007/04/01

2.3. Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.26 dB.

Radiated Emission

The measurement uncertainty is evaluated as ± 3.19 dB.

2.4. Test Environment


Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	50
	Barometric pressure (mbar)	860-1060	950-1000
Radiated Emission	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	65
	Barometric pressure (mbar)	860-1060	950-1000

3. Conducted Emission

3.1. Test Specification

According to Standard: FCC Part 15 Subpart B, ANSI C63.4

3.2. Test Setup

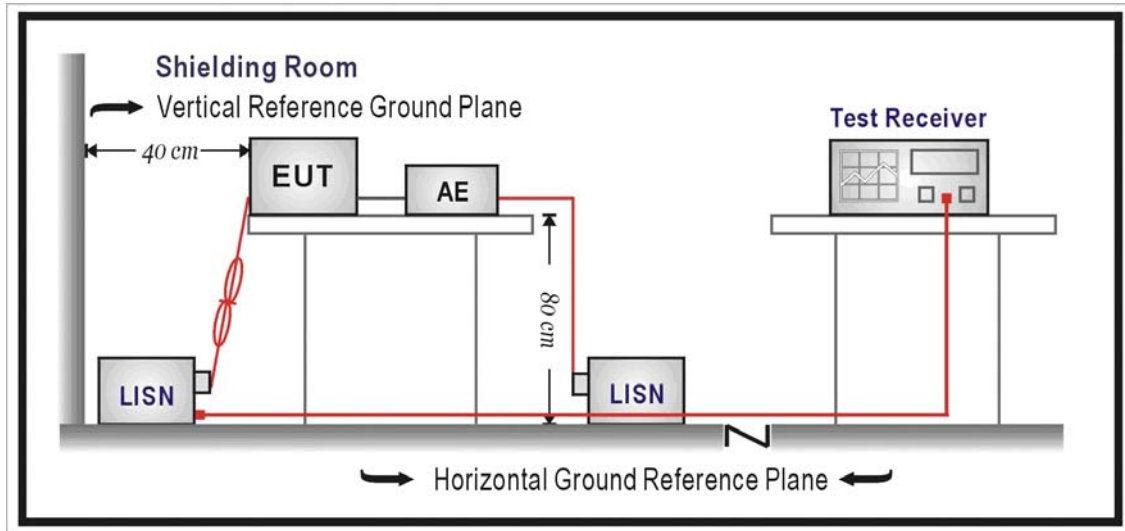

3.3. Limit

Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

3.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.


(Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Test Result

Site : ShieldingRoom3	Time : 2007/08/17 - 10:15
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line1
Power : AC 120V / 60Hz	Note : Mode 1: Slide show

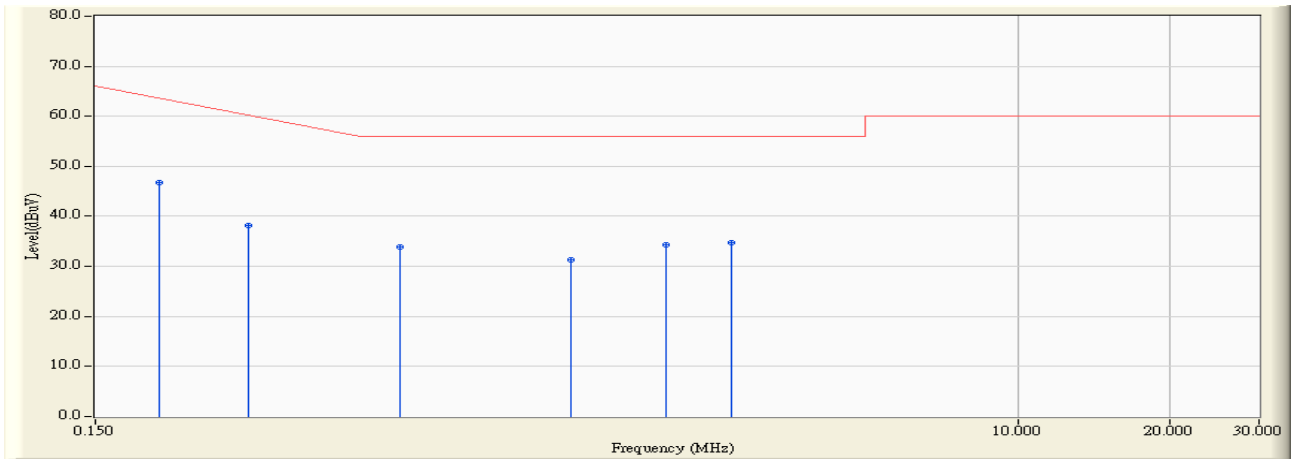


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.201	0.154	46.510	46.664	-17.879	64.543	QUASIPeAK
2		0.301	0.177	37.910	38.087	-23.599	61.686	QUASIPeAK
3		0.602	0.210	33.600	33.810	-22.190	56.000	QUASIPeAK
4		1.308	0.280	30.950	31.230	-24.770	56.000	QUASIPeAK
5		2.011	0.390	34.000	34.390	-21.610	56.000	QUASIPeAK
6		2.715	0.410	34.270	34.680	-21.320	56.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:15
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line1
Power : AC 120V / 60Hz	Note : Mode 1: Slide show

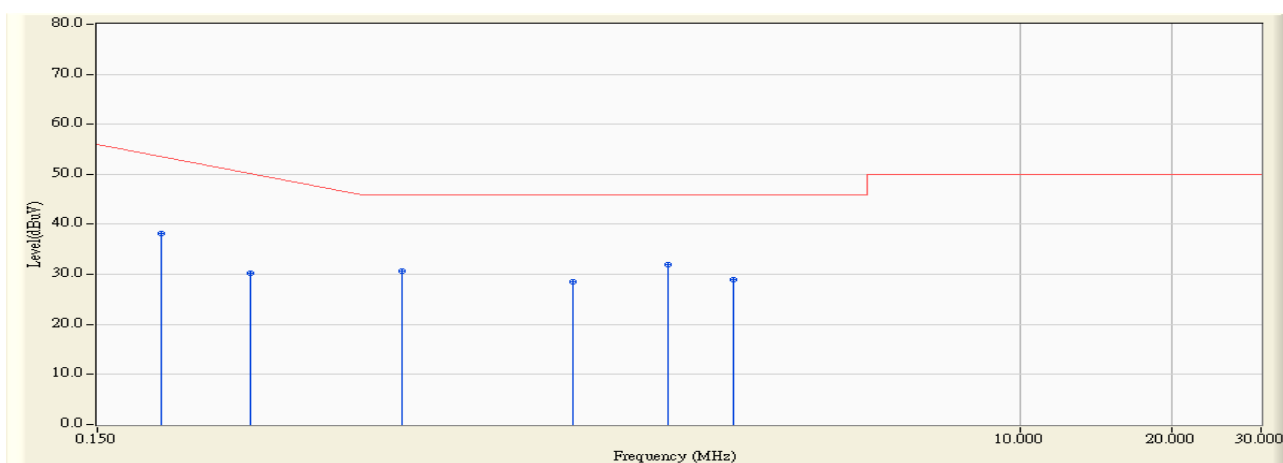


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.201	0.154	38.130	38.284	-16.259	54.543	AVERAGE
2		0.301	0.177	30.100	30.277	-21.409	51.686	AVERAGE
3		0.602	0.210	30.390	30.600	-15.400	46.000	AVERAGE
4		1.308	0.280	28.310	28.590	-17.410	46.000	AVERAGE
5	*	2.011	0.390	31.470	31.860	-14.140	46.000	AVERAGE
6		2.715	0.410	28.580	28.990	-17.010	46.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:18
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line2
Power : AC 120V / 60Hz	Note : Mode 1: Slide show

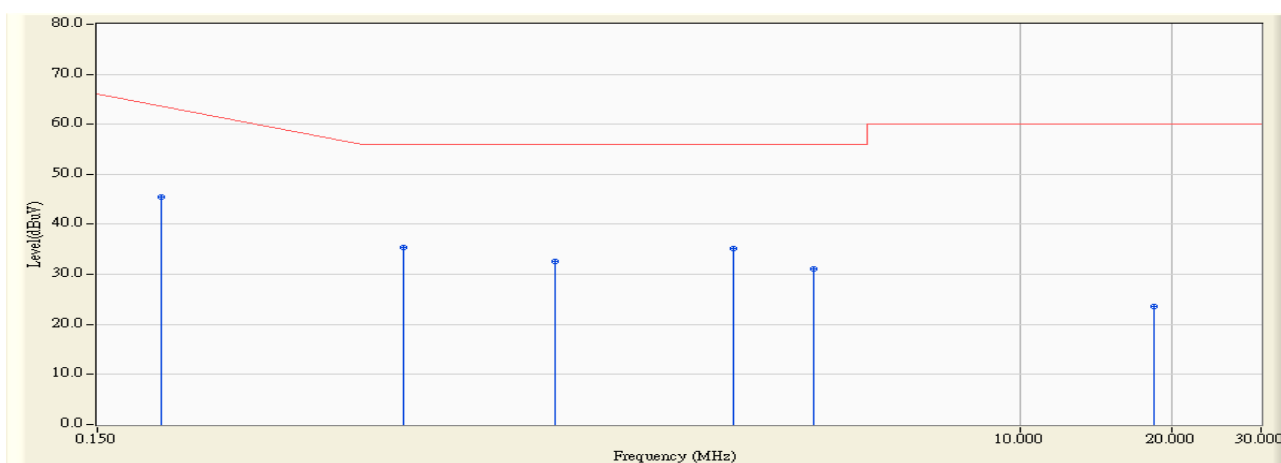


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.200	0.154	45.410	45.564	-19.007	64.571	QUASIPeAK
2		0.603	0.210	35.140	35.350	-20.650	56.000	QUASIPeAK
3		1.206	0.260	32.280	32.540	-23.460	56.000	QUASIPeAK
4		2.714	0.410	34.680	35.090	-20.910	56.000	QUASIPeAK
5		3.921	0.430	30.670	31.100	-24.900	56.000	QUASIPeAK
6		18.400	0.890	22.790	23.680	-36.320	60.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:18
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line2
Power : AC 120V / 60Hz	Note : Mode 1: Slide show

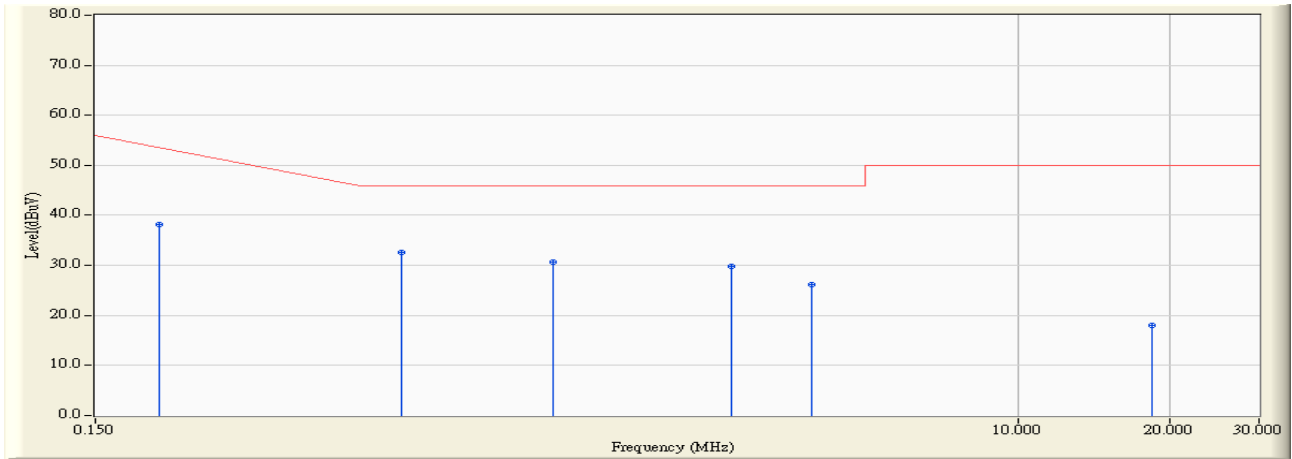


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.200	0.154	38.130	38.284	-16.287	54.571	AVERAGE
2	*	0.603	0.210	32.370	32.580	-13.420	46.000	AVERAGE
3		1.206	0.260	30.350	30.610	-15.390	46.000	AVERAGE
4		2.714	0.410	29.330	29.740	-16.260	46.000	AVERAGE
5		3.921	0.430	25.830	26.260	-19.740	46.000	AVERAGE
6		18.400	0.890	17.100	17.990	-32.010	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:21
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line1
Power : AC 120V / 60Hz	Note : Mode 2: REC

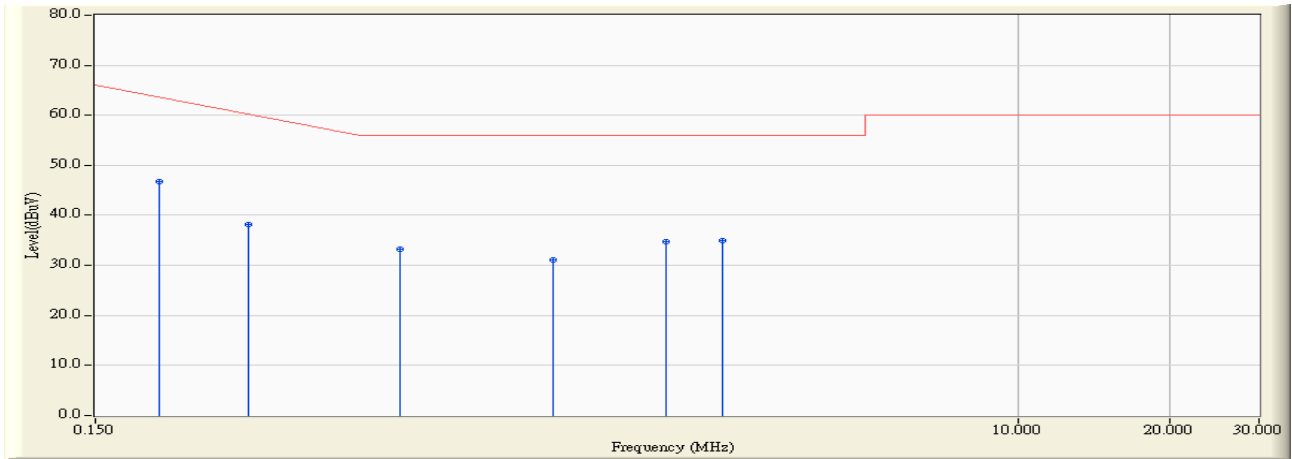


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.201	0.154	46.590	46.744	-17.799	64.543	QUASPEAK
2		0.301	0.177	38.050	38.227	-23.459	61.686	QUASPEAK
3		0.602	0.210	33.070	33.280	-22.720	56.000	QUASPEAK
4		1.206	0.260	30.880	31.140	-24.860	56.000	QUASPEAK
5		2.011	0.390	34.420	34.810	-21.190	56.000	QUASPEAK
6		2.613	0.410	34.600	35.010	-20.990	56.000	QUASPEAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:21
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line1
Power : AC 120V / 60Hz	Note : Mode 2: REC

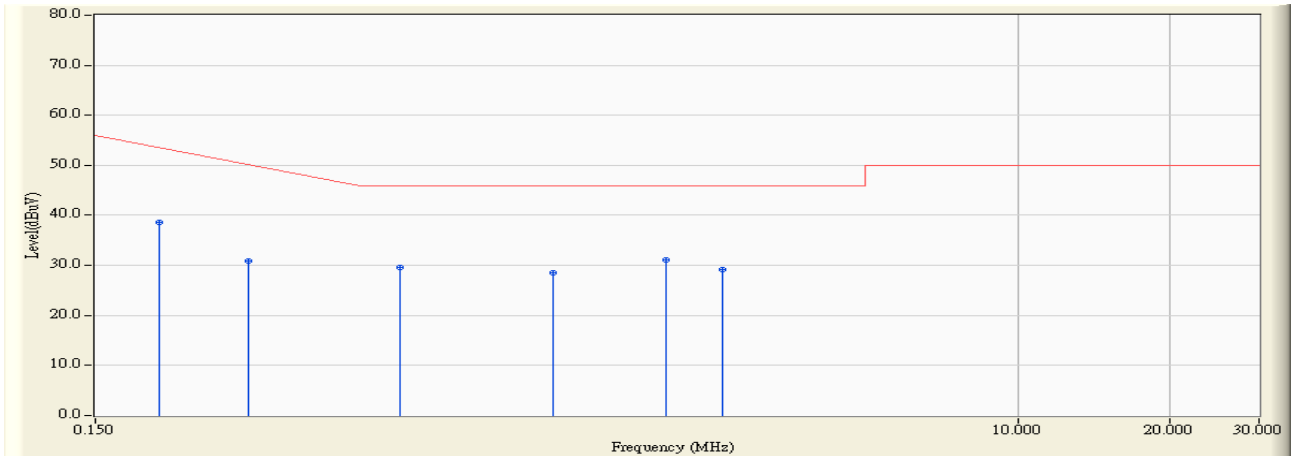


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.201	0.154	38.350	38.504	-16.039	54.543	AVERAGE
2		0.301	0.177	30.730	30.907	-20.779	51.686	AVERAGE
3		0.602	0.210	29.350	29.560	-16.440	46.000	AVERAGE
4		1.206	0.260	28.160	28.420	-17.580	46.000	AVERAGE
5	*	2.011	0.390	30.700	31.090	-14.910	46.000	AVERAGE
6		2.613	0.410	28.730	29.140	-16.860	46.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:24
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line2
Power : AC 120V / 60Hz	Note : Mode 2: REC

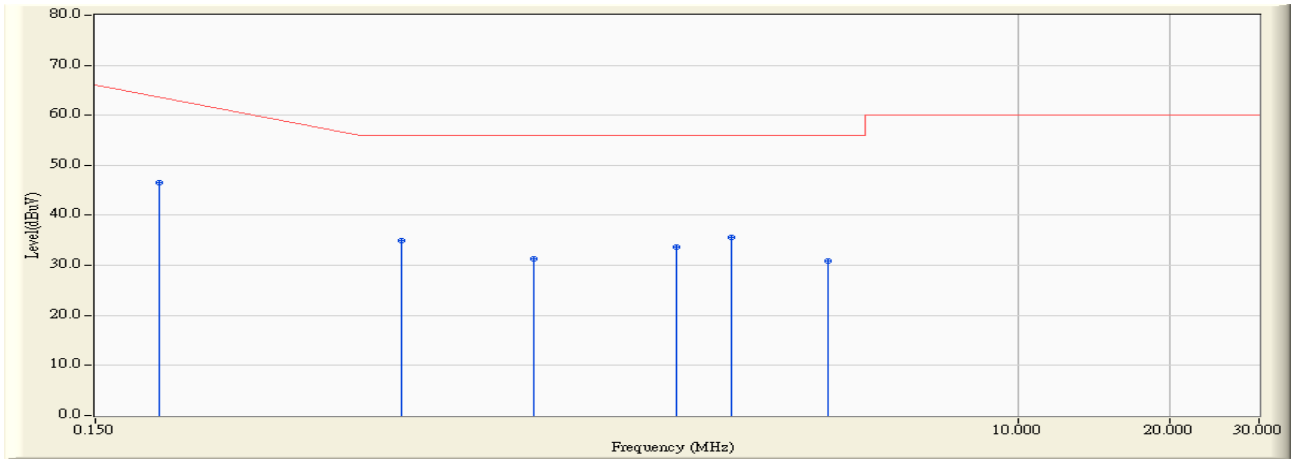


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.201	0.154	46.290	46.444	-18.099	64.543	QUASIPeAK
2		0.603	0.210	34.700	34.910	-21.090	56.000	QUASIPeAK
3		1.107	0.250	31.120	31.370	-24.630	56.000	QUASIPeAK
4		2.111	0.391	33.340	33.731	-22.269	56.000	QUASIPeAK
5		2.714	0.410	35.150	35.560	-20.440	56.000	QUASIPeAK
6		4.222	0.440	30.410	30.850	-25.150	56.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:24
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line2
Power : AC 120V / 60Hz	Note : Mode 2: REC

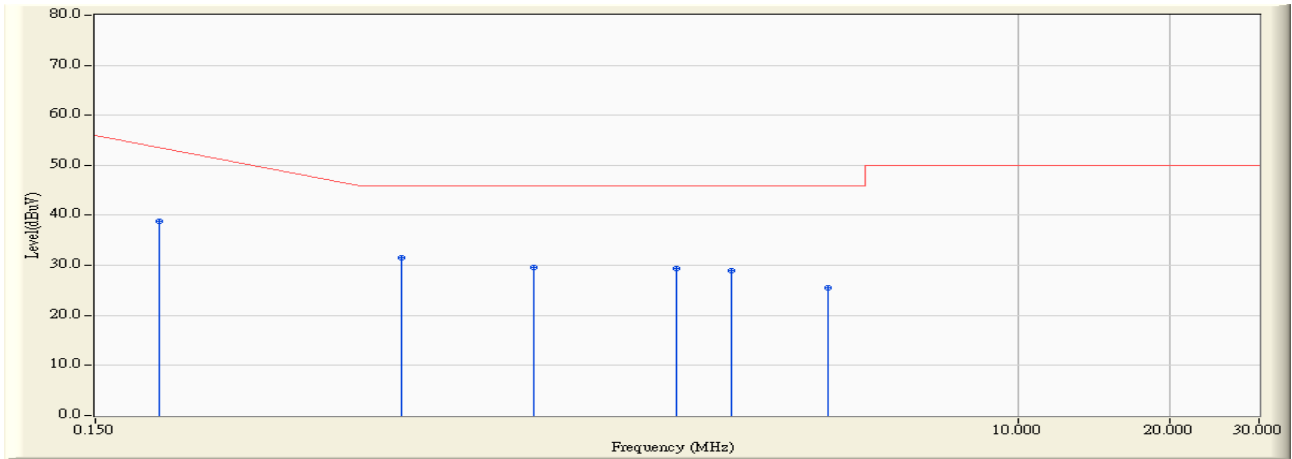


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.201	0.154	38.620	38.774	-15.769	54.543	AVERAGE
2	*	0.603	0.210	31.330	31.540	-14.460	46.000	AVERAGE
3		1.107	0.250	29.310	29.560	-16.440	46.000	AVERAGE
4		2.111	0.391	28.990	29.381	-16.619	46.000	AVERAGE
5		2.714	0.410	28.580	28.990	-17.010	46.000	AVERAGE
6		4.222	0.440	25.170	25.610	-20.390	46.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:32
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line1
Power : AC 120V / 60Hz	Note : Mode 3: USB-LCD On

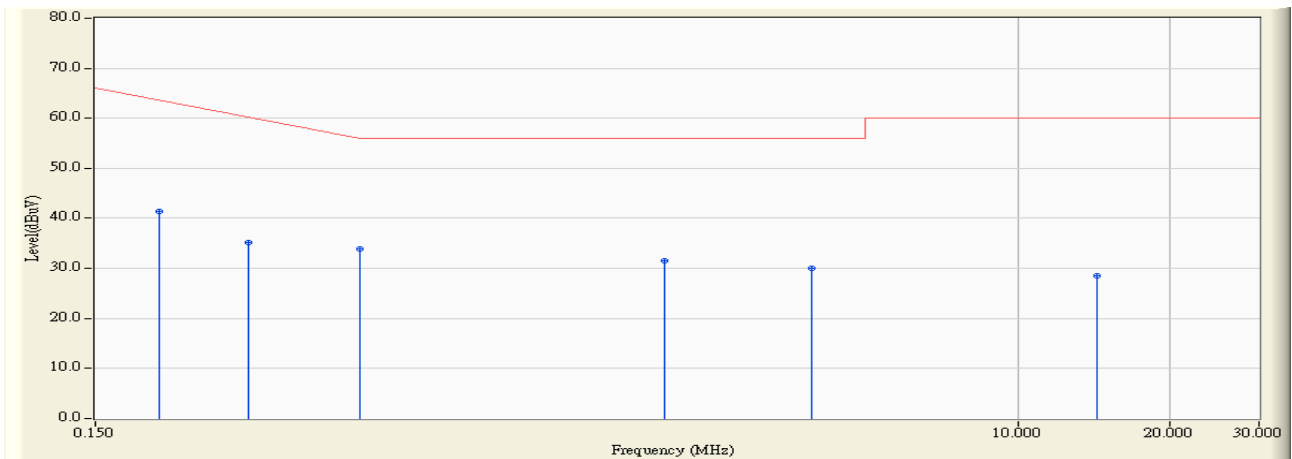


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.200	0.154	41.170	41.324	-23.247	64.571	QUASIPeAK
2		0.302	0.178	35.020	35.198	-26.459	61.657	QUASIPeAK
3	*	0.500	0.210	33.740	33.950	-22.050	56.000	QUASIPeAK
4		2.009	0.390	31.230	31.620	-24.380	56.000	QUASIPeAK
5		3.920	0.430	29.530	29.960	-26.040	56.000	QUASIPeAK
6		14.318	0.850	27.770	28.620	-31.380	60.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:32
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line1
Power : AC 120V / 60Hz	Note : Mode 3: USB-LCD On

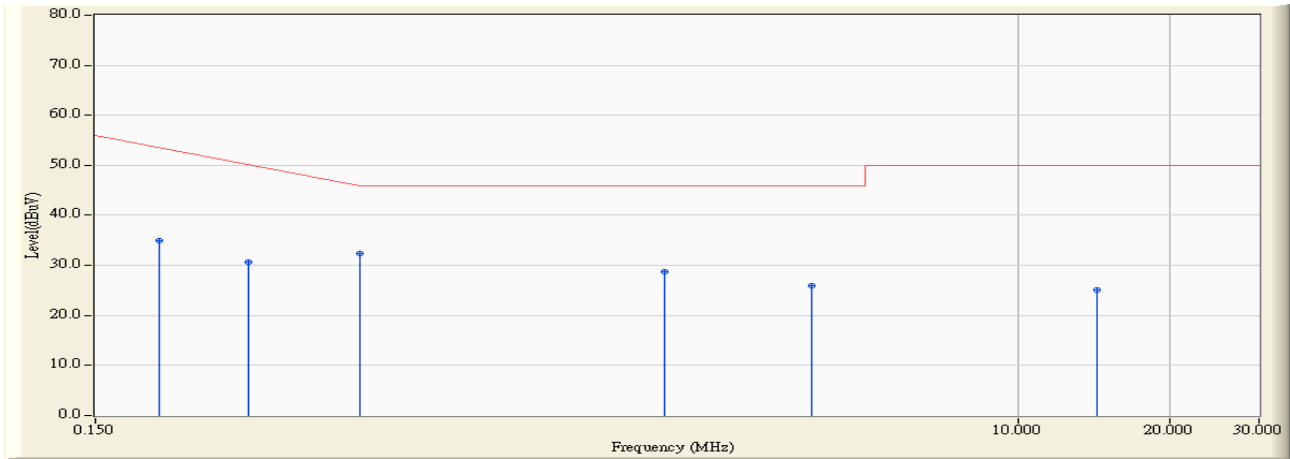


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.200	0.154	34.830	34.984	-19.587	54.571	AVERAGE
2		0.302	0.178	30.390	30.568	-21.089	51.657	AVERAGE
3	*	0.500	0.210	32.090	32.300	-13.700	46.000	AVERAGE
4		2.009	0.390	28.260	28.650	-17.350	46.000	AVERAGE
5		3.920	0.430	25.460	25.890	-20.110	46.000	AVERAGE
6		14.318	0.850	24.190	25.040	-24.960	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:29
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line2
Power : AC 120V / 60Hz	Note : Mode 3: USB-LCD On

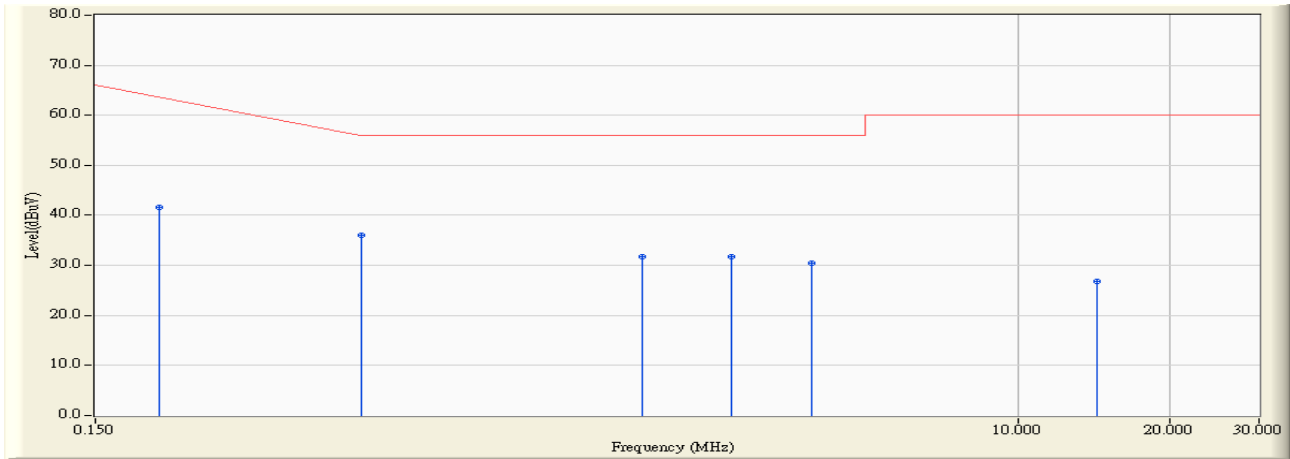


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.201	0.154	41.410	41.564	-22.979	64.543	QUASIPeAK
2	*	0.502	0.210	35.900	36.110	-19.890	56.000	QUASIPeAK
3		1.810	0.360	31.280	31.640	-24.360	56.000	QUASIPeAK
4		2.712	0.410	31.410	31.820	-24.180	56.000	QUASIPeAK
5		3.921	0.430	30.110	30.540	-25.460	56.000	QUASIPeAK
6		14.384	0.839	26.020	26.859	-33.141	60.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:29
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line2
Power : AC 120V / 60Hz	Note : Mode 3: USB-LCD On

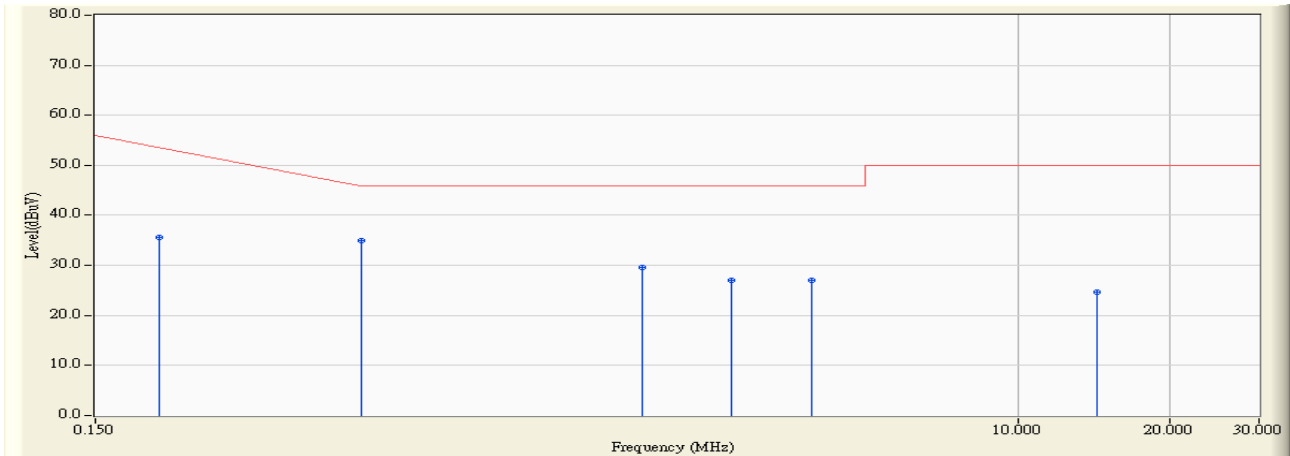


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.201	0.154	35.460	35.614	-18.929	54.543	AVERAGE
2	*	0.502	0.210	34.660	34.870	-11.130	46.000	AVERAGE
3		1.810	0.360	29.190	29.550	-16.450	46.000	AVERAGE
4		2.712	0.410	26.600	27.010	-18.990	46.000	AVERAGE
5		3.921	0.430	26.560	26.990	-19.010	46.000	AVERAGE
6		14.384	0.839	23.820	24.659	-25.341	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:44
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line1
Power : AC 120V / 60Hz	Note : Mode 4: Preview

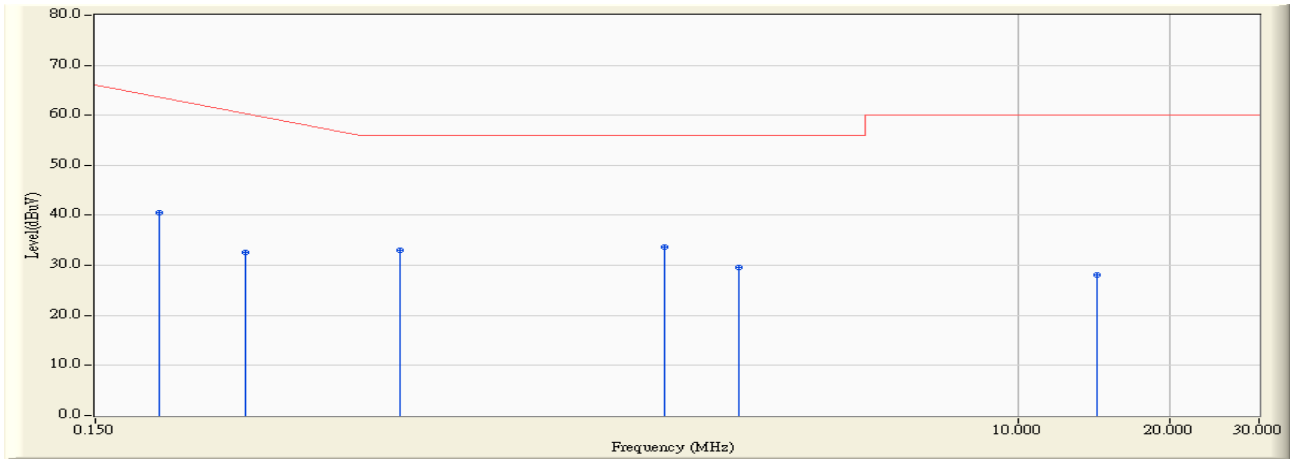


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.200	0.154	40.350	40.504	-24.067	64.571	QUASIPeAK
2		0.298	0.177	32.340	32.517	-29.254	61.771	QUASIPeAK
3		0.600	0.210	32.790	33.000	-23.000	56.000	QUASIPeAK
4	*	2.009	0.390	33.310	33.700	-22.300	56.000	QUASIPeAK
5		2.815	0.410	29.210	29.620	-26.380	56.000	QUASIPeAK
6		14.310	0.850	27.230	28.080	-31.920	60.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:44
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line1
Power : AC 120V / 60Hz	Note : Mode 4: Preview

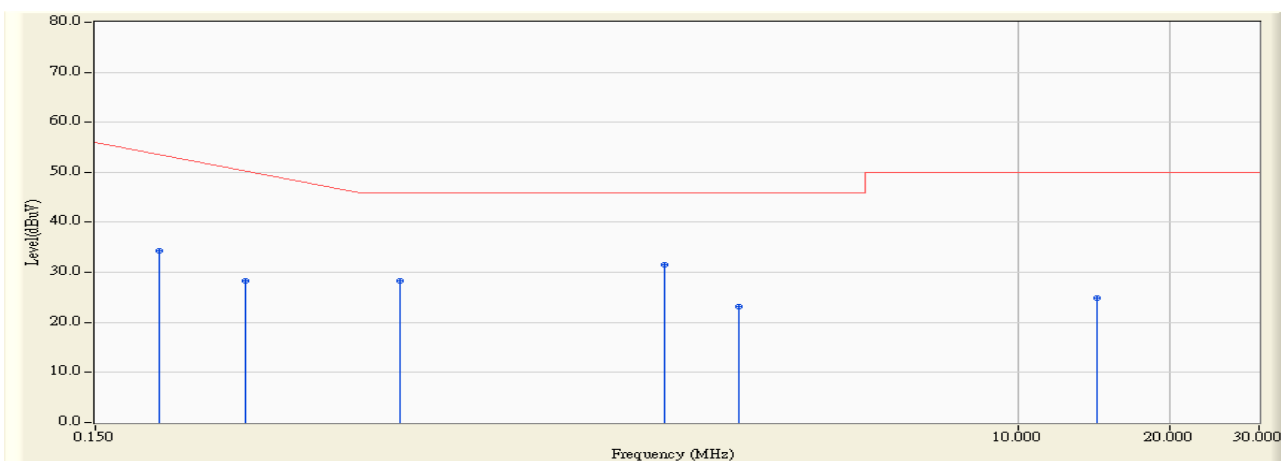


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.200	0.154	34.190	34.344	-20.227	54.571	AVERAGE
2		0.298	0.177	28.210	28.387	-23.384	51.771	AVERAGE
3		0.600	0.210	28.200	28.410	-17.590	46.000	AVERAGE
4	*	2.009	0.390	31.170	31.560	-14.440	46.000	AVERAGE
5		2.815	0.410	22.680	23.090	-22.910	46.000	AVERAGE
6		14.310	0.850	24.040	24.890	-25.110	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:47
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line2
Power : AC 120V / 60Hz	Note : Mode 4: Preview

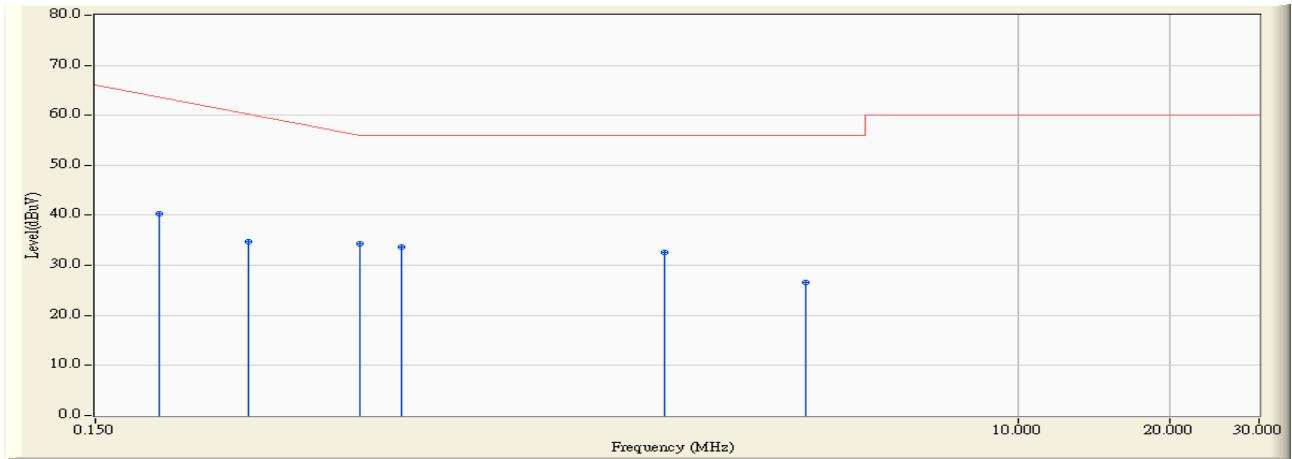


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.201	0.154	40.100	40.254	-24.289	64.543	QUASIPeAK
2		0.301	0.177	34.470	34.647	-27.039	61.686	QUASIPeAK
3	*	0.501	0.210	34.110	34.320	-21.680	56.000	QUASIPeAK
4		0.603	0.210	33.500	33.710	-22.290	56.000	QUASIPeAK
5		2.009	0.390	32.190	32.580	-23.420	56.000	QUASIPeAK
6		3.818	0.430	26.060	26.490	-29.510	56.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : ShieldingRoom3	Time : 2007/08/17 - 10:47
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Digital Still Camera	Probe : SR3_LISN(16A) - Line2
Power : AC 120V / 60Hz	Note : Mode 4: Preview

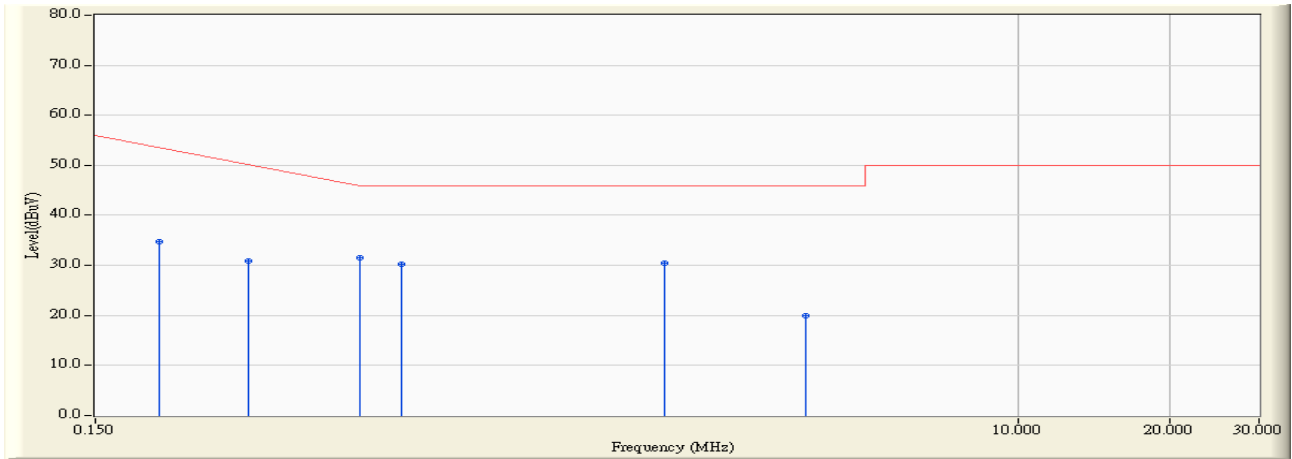

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.201	0.154	34.660	34.814	-19.729	54.543	AVERAGE
2		0.301	0.177	30.810	30.987	-20.699	51.686	AVERAGE
3	*	0.501	0.210	31.330	31.540	-14.460	46.000	AVERAGE
4		0.603	0.210	29.960	30.170	-15.830	46.000	AVERAGE
5		2.009	0.390	30.000	30.390	-15.610	46.000	AVERAGE
6		3.818	0.430	19.410	19.840	-26.160	46.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.


4. Radiated Emission

4.1. Test Specification


According to EMC Standard: FCC Part 15 Subpart B, ANSI C63.4

4.2. Test Setup

Under 1GHz Test Setup:

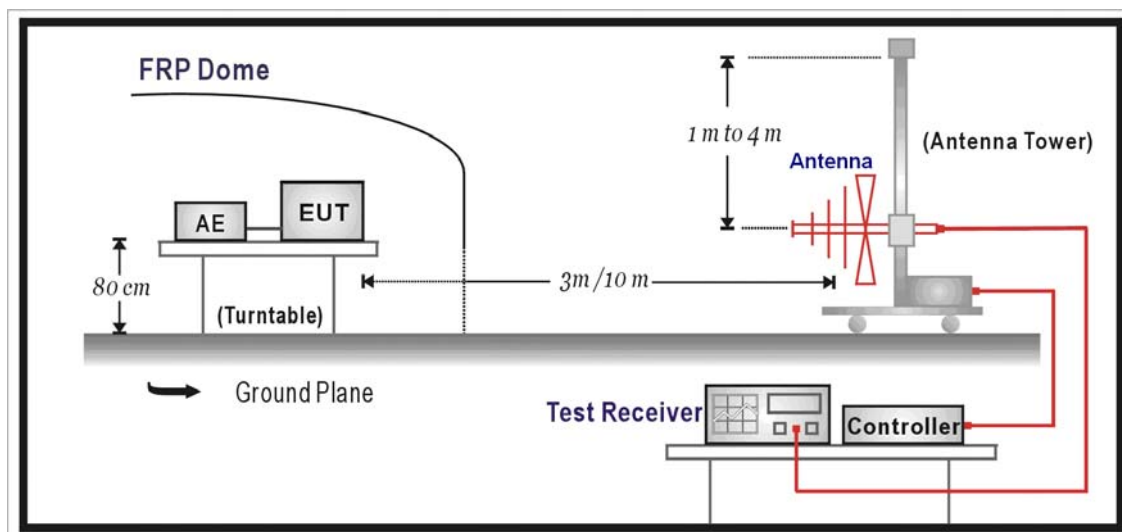

Above 1GHz Test Setup:

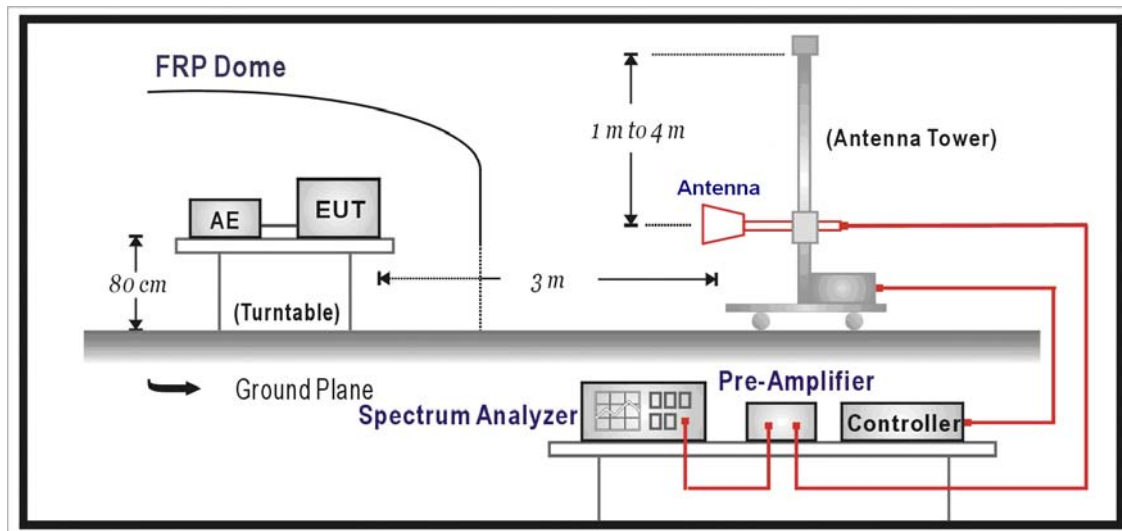

4.3. Limit

FCC Part 15 Subpart B Paragraph 15.109 Limits (dBuV/m)		
Frequency (MHz)	Distance (m)	dBuV/m
30-88	3	40
88-216	3	43.5
216-960	3	46
Above 960	3	54

Remark:

1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground.

The turn table can rotate 360 degrees to determine the position of the maximum emission level and the antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.

For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

On any frequency or frequencies below or equal to 1000 MHz, the radiated limits shown are based on measuring equipment employing a quasi-peak detector function and above 1000 MHz, the radiated limits shown are based measuring equipment employing an average detector function.

When average radiated emission measurement are included emission measurement Above 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.


For class A, the measurement distance between the EUT and antenna is 10 meters for under 1GHz and above 1GHz.

For class B, the measurement distance between the EUT and antenna is 3 meters for under 1GHz and 3 meters for above 1GHz.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz and above 1GHz is 1MHz.

4.5. Test Result

Site : SITE 2	Time : 2007/08/27 - 17:41
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Digital Still Camera	Probe : PRO 06-03-29 ST2 - HORIZONTAL
Power : AC 120V / 60Hz	Note : Mode 1: Slide show

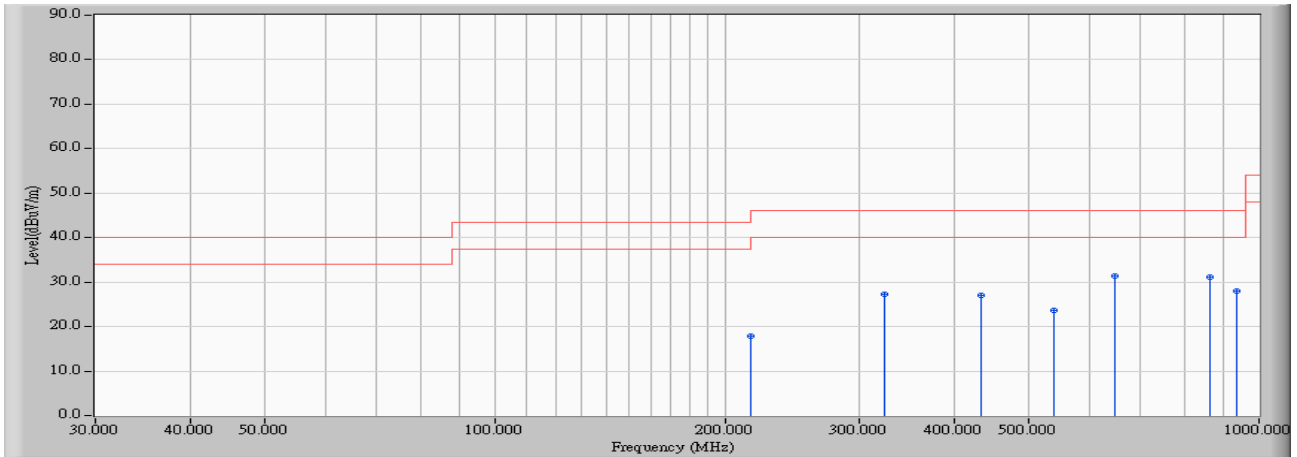


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	216.000	11.873	6.100	17.972	-25.528	43.500	QUASIPeAK
2	324.000	16.991	10.200	27.191	-18.809	46.000	QUASIPeAK
3	432.000	18.665	8.400	27.065	-18.935	46.000	QUASIPeAK
4	540.000	20.501	3.100	23.601	-22.399	46.000	QUASIPeAK
5	* 648.000	24.192	7.100	31.292	-14.708	46.000	QUASIPeAK
6	864.000	24.920	6.100	31.020	-14.980	46.000	QUASIPeAK
7	936.000	26.759	1.200	27.959	-18.041	46.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SITE 2	Time : 2007/08/22 - 09:37
Limit : FCC_B_(Above_1G)_3M_AV	Margin : 6
EUT : Digital Still Camera	Probe : FCC_RF_1G-18G(2005-3) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 1: Slide show

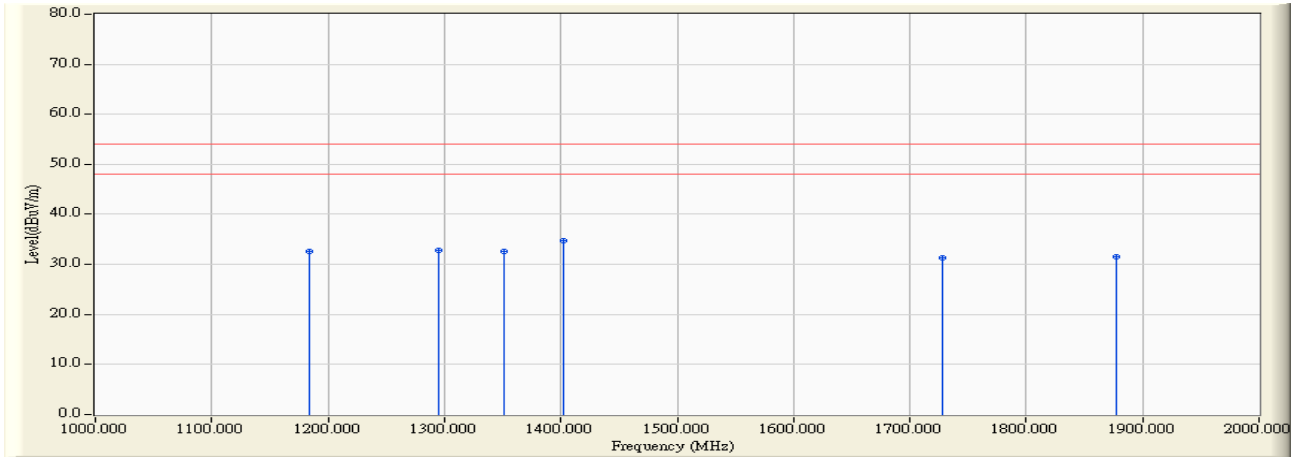


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	1183.370	-9.125	41.830	32.705	-21.295	54.000	PEAK
2	1294.580	-8.856	41.770	32.913	-21.087	54.000	PEAK
3	1350.700	-8.654	41.190	32.536	-21.464	54.000	PEAK
4	* 1402.800	-8.489	43.230	34.741	-19.259	54.000	PEAK
5	1727.450	-7.053	38.310	31.257	-22.743	54.000	PEAK
6	1877.750	-6.190	37.790	31.600	-22.400	54.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : SITE 2	Time : 2007/08/27 - 17:16
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Digital Still Camera	Probe : PRO 06-03-29 ST2 - VERTICAL
Power : AC 120V / 60Hz	Note : Mode 1: Slide show

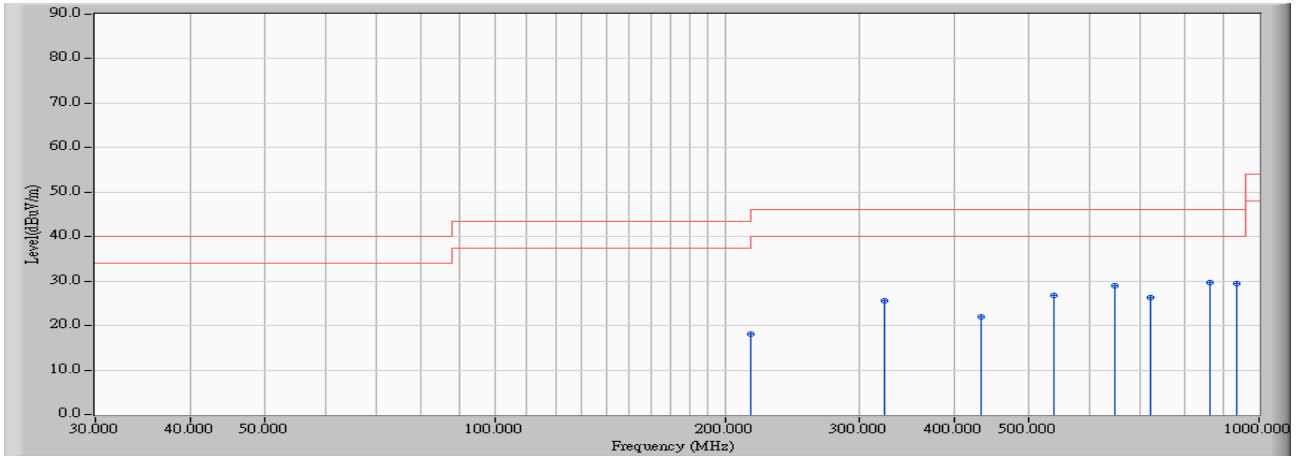


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	216.000	11.779	6.400	18.178	-25.322	43.500	QUASPEAK
2	324.000	14.263	11.200	25.463	-20.537	46.000	QUASPEAK
3	432.000	16.366	5.600	21.966	-24.034	46.000	QUASPEAK
4	540.000	22.608	4.200	26.807	-19.193	46.000	QUASPEAK
5	648.000	22.144	6.800	28.944	-17.056	46.000	QUASPEAK
6	720.000	22.703	3.500	26.203	-19.797	46.000	QUASPEAK
7	* 864.000	25.383	4.410	29.793	-16.207	46.000	QUASPEAK
8	936.000	25.286	4.200	29.486	-16.514	46.000	QUASPEAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SITE 2	Time : 2007/08/22 - 09:44
Limit : FCC_B_(Above_1G)_3M_AV	Margin : 6
EUT : Digital Still Camera	Probe : FCC_RF_1G-18G(2005-3) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 1: Slide show

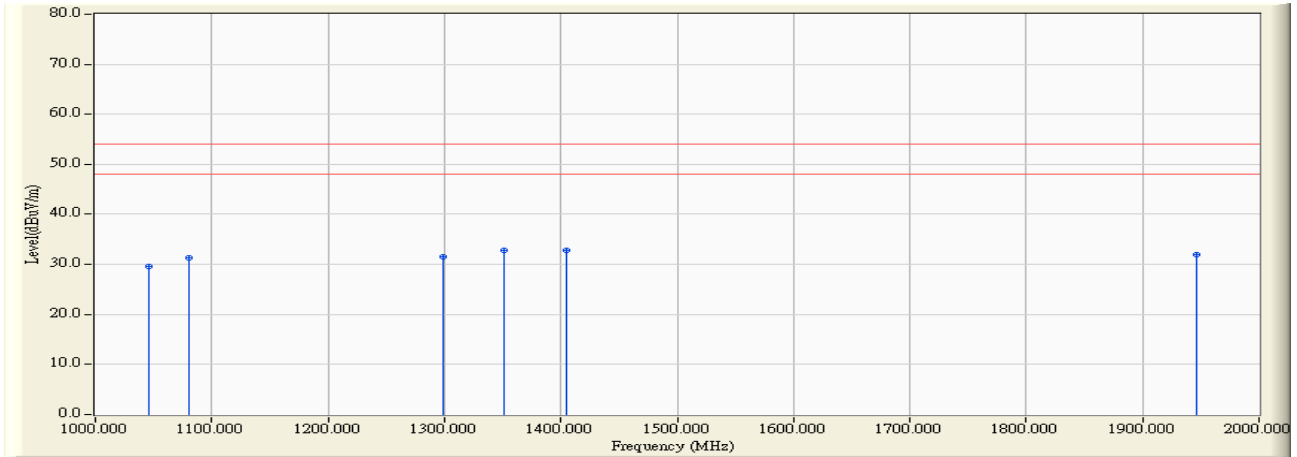


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	1046.090	-8.986	38.490	29.504	-24.496	54.000	PEAK
2	1080.160	-8.857	40.170	31.313	-22.687	54.000	PEAK
3	1298.590	-8.055	39.530	31.476	-22.524	54.000	PEAK
4	* 1350.700	-7.854	40.620	32.766	-21.234	54.000	PEAK
5	1404.800	-7.686	40.450	32.764	-21.236	54.000	PEAK
6	1945.890	-5.761	37.770	32.009	-21.991	54.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : SITE 2	Time : 2007/08/27 - 15:44
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Digital Still Camera	Probe : PRO 06-03-29 ST2 - HORIZONTAL
Power : AC 120V / 60Hz	Note : Mode 2: REC

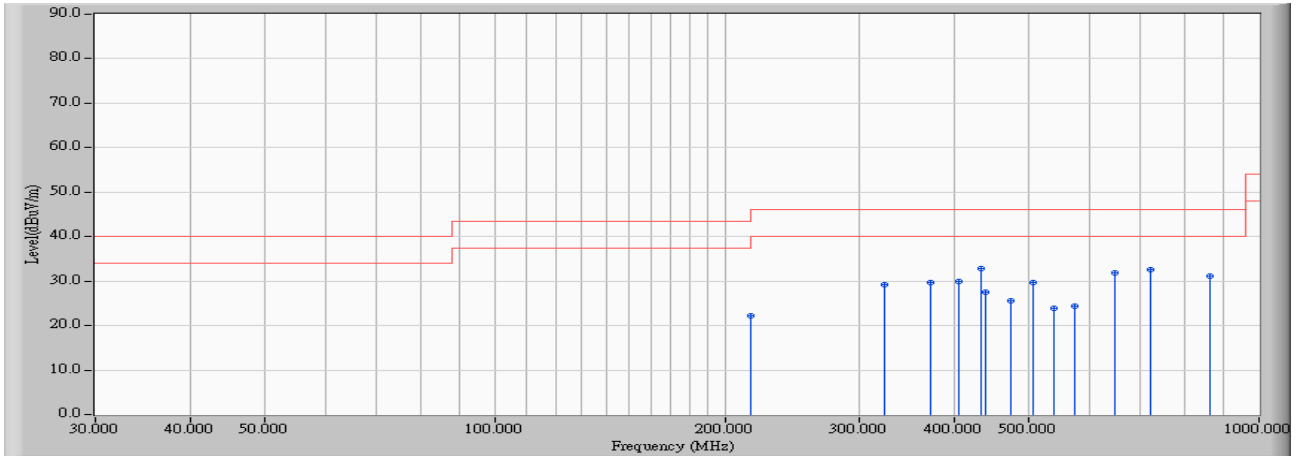


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	216.000	11.873	10.210	22.082	-21.418	43.500	QUASIPeAK
2	324.000	16.991	12.100	29.091	-16.909	46.000	QUASIPeAK
3	371.250	17.574	12.100	29.674	-16.326	46.000	QUASIPeAK
4	404.975	19.359	10.540	29.899	-16.101	46.000	QUASIPeAK
5	* 432.000	18.665	14.100	32.765	-13.235	46.000	QUASIPeAK
6	438.825	17.300	10.200	27.500	-18.500	46.000	QUASIPeAK
7	472.475	19.117	6.500	25.617	-20.383	46.000	QUASIPeAK
8	506.225	21.233	8.470	29.703	-16.297	46.000	QUASIPeAK
9	540.000	20.501	3.420	23.921	-22.079	46.000	QUASIPeAK
10	573.725	20.904	3.500	24.404	-21.596	46.000	QUASIPeAK
11	648.000	24.192	7.540	31.732	-14.268	46.000	QUASIPeAK
12	720.000	24.554	8.100	32.654	-13.346	46.000	QUASIPeAK
13	864.000	24.920	6.100	31.020	-14.980	46.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SITE 2	Time : 2007/08/22 - 09:58
Limit : FCC_B_(Above_1G)_3M_AV	Margin : 6
EUT : Digital Still Camera	Probe : FCC_RF_1G-18G(2005-3) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 2: REC

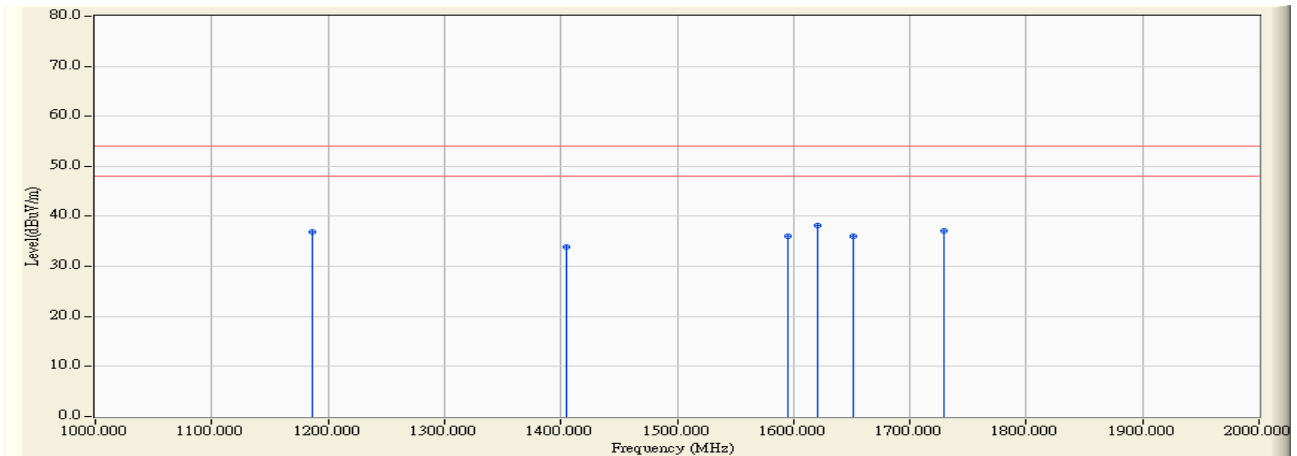


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		1186.370	-9.088	45.970	36.882	-17.118	54.000	PEAK
2		1404.800	-8.486	42.450	33.964	-20.036	54.000	PEAK
3		1595.190	-7.909	43.890	35.981	-18.019	54.000	PEAK
4	*	1621.240	-7.766	45.920	38.154	-15.846	54.000	PEAK
5		1651.300	-7.592	43.660	36.069	-17.931	54.000	PEAK
6		1729.450	-7.012	44.070	37.058	-16.942	54.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : SITE 2	Time : 2007/08/27 - 15:16
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Digital Still Camera	Probe : PRO 06-03-29 ST2 - VERTICAL
Power : AC 120V / 60Hz	Note : Mode 2: REC

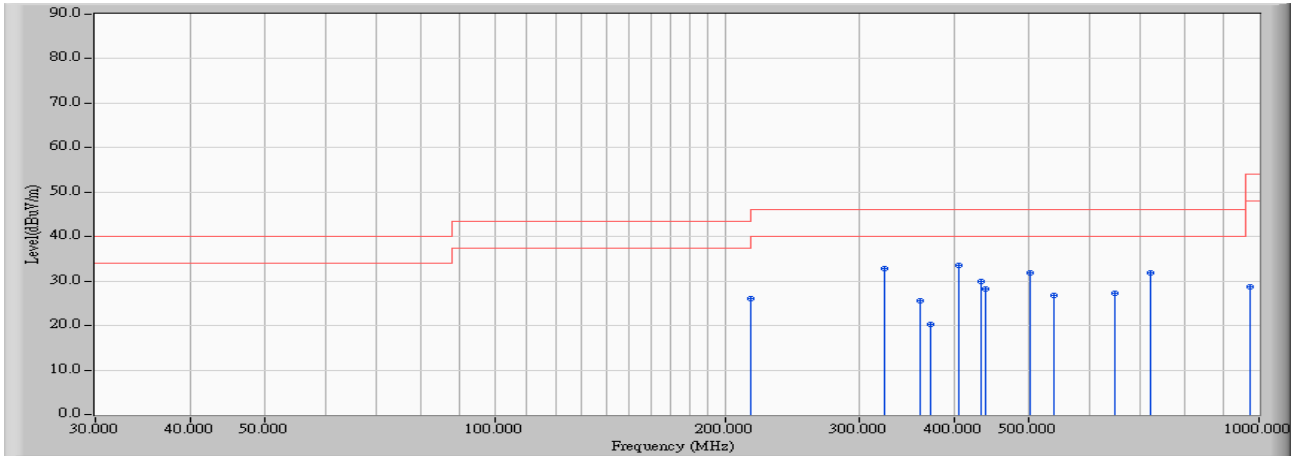


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		216.000	11.779	14.200	25.978	-17.522	43.500	QUASIPeAK
2		324.000	14.263	18.540	32.803	-13.197	46.000	QUASIPeAK
3		360.000	19.291	6.400	25.691	-20.309	46.000	QUASIPeAK
4		371.225	16.359	4.000	20.359	-25.641	46.000	QUASIPeAK
5	*	404.975	17.176	16.410	33.586	-12.414	46.000	QUASIPeAK
6		432.000	16.366	13.540	29.906	-16.094	46.000	QUASIPeAK
7		438.725	18.206	10.000	28.206	-17.794	46.000	QUASIPeAK
8		502.225	19.759	12.100	31.859	-14.141	46.000	QUASIPeAK
9		540.000	22.608	4.100	26.707	-19.293	46.000	QUASIPeAK
10		648.000	22.144	5.010	27.154	-18.846	46.000	QUASIPeAK
11		720.000	22.703	9.120	31.823	-14.177	46.000	QUASIPeAK
12		972.000	26.123	2.500	28.624	-25.376	54.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SITE 2	Time : 2007/08/22 - 09:50
Limit : FCC_B_(Above_1G)_3M_AV	Margin : 6
EUT : Digital Still Camera	Probe : FCC_RF_1G-18G(2005-3) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 2: REC

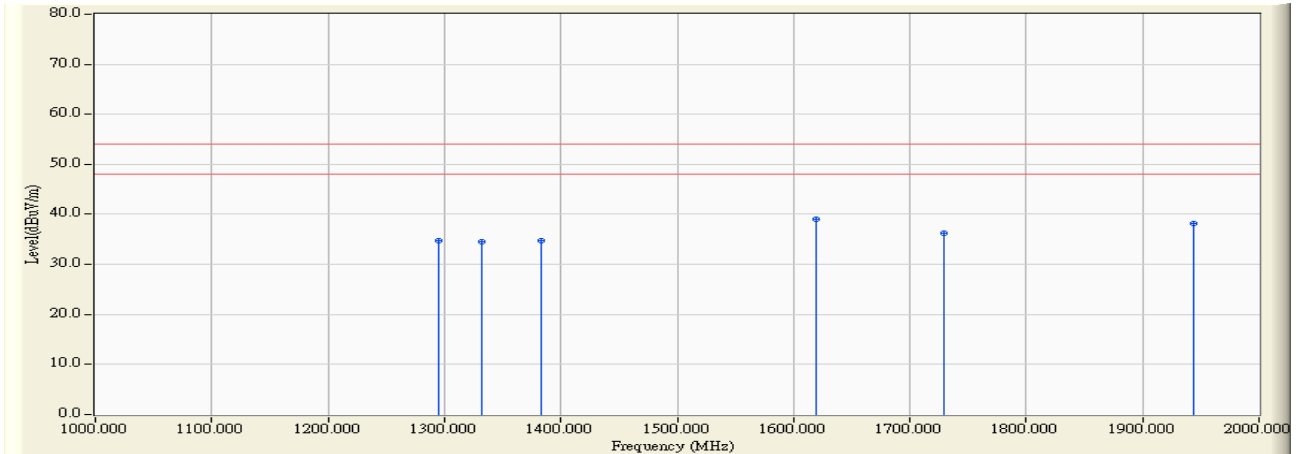


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		1294.580	-8.056	42.880	34.823	-19.177	54.000	PEAK
2		1332.660	-7.904	42.520	34.616	-19.384	54.000	PEAK
3		1382.760	-7.768	42.520	34.752	-19.248	54.000	PEAK
4	*	1619.230	-6.978	46.100	39.123	-14.877	54.000	PEAK
5		1729.450	-6.212	42.560	36.348	-17.652	54.000	PEAK
6		1943.880	-5.752	44.030	38.278	-15.722	54.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : SITE 2	Time : 2007/08/27 - 18:50
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Digital Still Camera	Probe : PRO 06-03-29 ST2 - HORIZONTAL
Power : AC 120V / 60Hz	Note : Mode 3: USB-LCD On

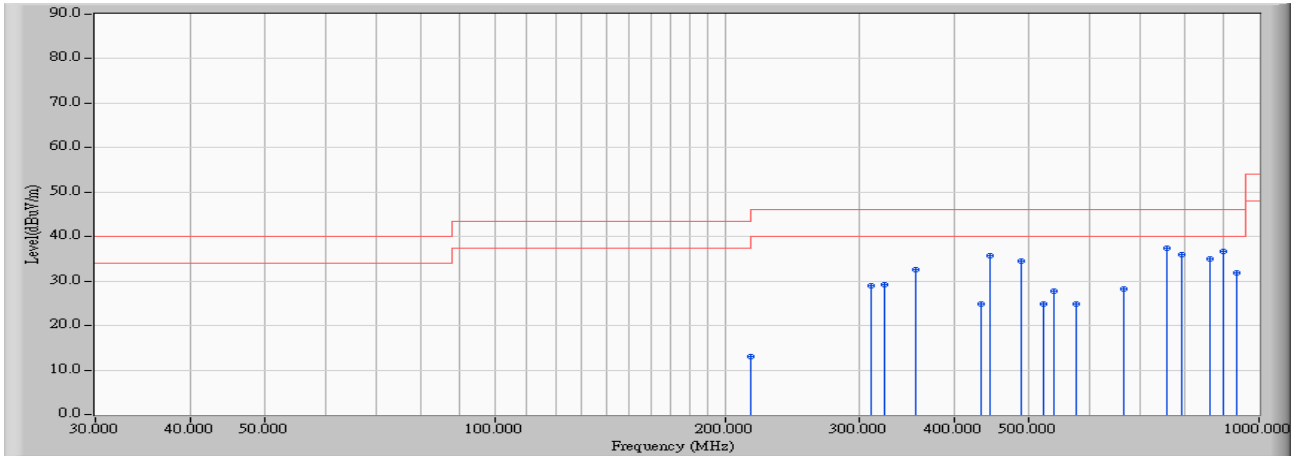


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	216.000	11.873	1.200	13.072	-30.428	43.500	QUASIPeAK
2	310.475	15.511	13.500	29.011	-16.989	46.000	QUASIPeAK
3	324.000	16.991	12.200	29.191	-16.809	46.000	QUASIPeAK
4	354.925	17.574	15.100	32.674	-13.326	46.000	QUASIPeAK
5	432.000	18.665	6.100	24.765	-21.235	46.000	QUASIPeAK
6	444.000	17.546	18.100	35.646	-10.354	46.000	QUASIPeAK
7	488.175	20.393	14.200	34.593	-11.407	46.000	QUASIPeAK
8	523.375	19.692	5.100	24.792	-21.208	46.000	QUASIPeAK
9	540.000	20.501	7.200	27.701	-18.299	46.000	QUASIPeAK
10	575.925	20.828	4.000	24.828	-21.172	46.000	QUASIPeAK
11	666.000	22.874	5.400	28.274	-17.726	46.000	QUASIPeAK
12	* 756.000	23.057	14.300	37.357	-8.643	46.000	QUASIPeAK
13	792.000	22.764	13.200	35.964	-10.036	46.000	QUASIPeAK
14	864.000	24.920	10.000	34.920	-11.080	46.000	QUASIPeAK
15	900.000	26.520	10.200	36.720	-9.280	46.000	QUASIPeAK
16	936.000	26.759	5.100	31.859	-14.141	46.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SITE 2	Time : 2007/08/22 - 10:27
Limit : FCC_B_(Above_1G)_3M_AV	Margin : 6
EUT : Digital Still Camera	Probe : FCC_RF_1G-18G(2005-3) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 3: USB-LCD On

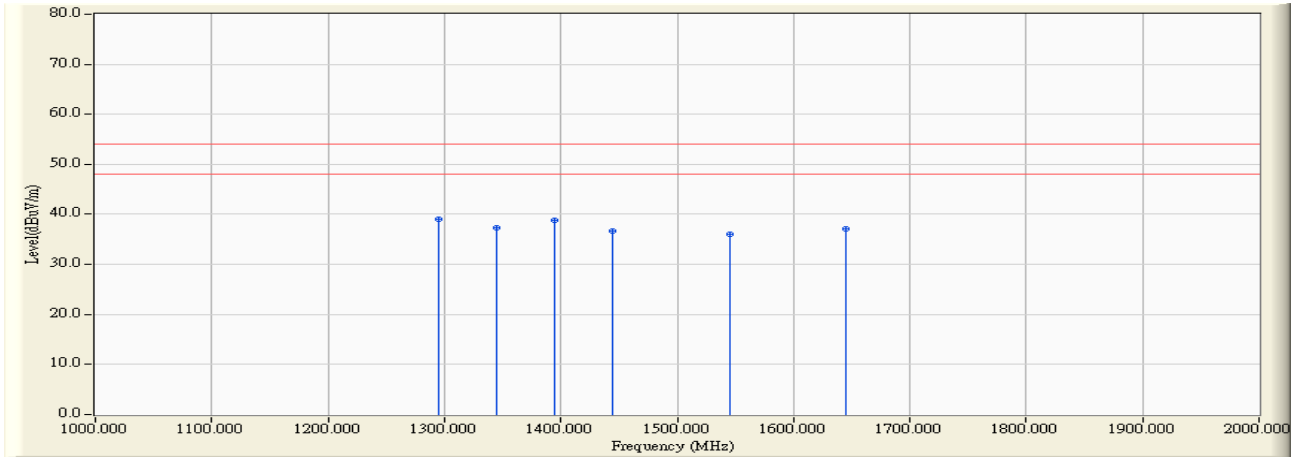


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	1294.580	-8.856	47.900	39.043	-14.957	54.000	PEAK
2		1344.680	-8.697	46.060	37.363	-16.637	54.000	PEAK
3		1394.780	-8.503	47.280	38.777	-15.223	54.000	PEAK
4		1444.880	-8.469	45.090	36.621	-17.379	54.000	PEAK
5		1545.090	-8.214	44.290	36.075	-17.925	54.000	PEAK
6		1645.290	-7.566	44.600	37.033	-16.967	54.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : SITE 2	Time : 2007/08/27 - 18:14
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Digital Still Camera	Probe : PRO 06-03-29 ST2 - VERTICAL
Power : AC 120V / 60Hz	Note : Mode 3: USB-LCD On

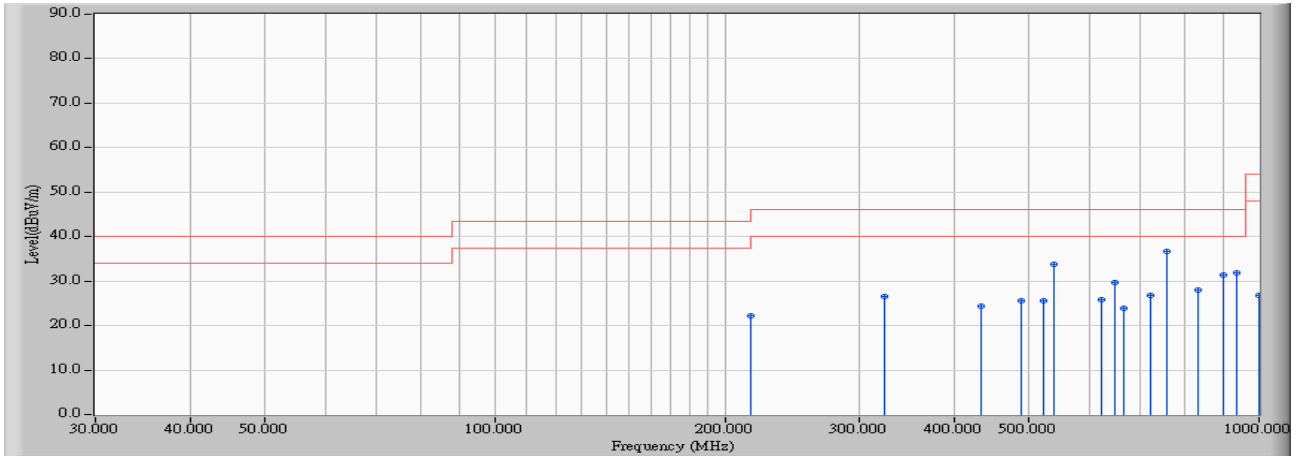


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	216.000	11.779	10.500	22.278	-21.222	43.500	QUASPEAK
2	324.000	14.263	12.200	26.463	-19.537	46.000	QUASPEAK
3	432.000	16.366	8.100	24.466	-21.534	46.000	QUASPEAK
4	488.000	20.514	5.100	25.614	-20.386	46.000	QUASPEAK
5	523.375	20.454	5.100	25.554	-20.446	46.000	QUASPEAK
6	540.000	22.608	11.200	33.807	-12.193	46.000	QUASPEAK
7	623.075	20.736	5.100	25.836	-20.164	46.000	QUASPEAK
8	648.000	22.144	7.500	29.644	-16.356	46.000	QUASPEAK
9	665.000	20.570	3.200	23.770	-22.230	46.000	QUASPEAK
10	720.000	22.703	4.000	26.703	-19.297	46.000	QUASPEAK
11	* 756.000	21.630	15.100	36.730	-9.270	46.000	QUASPEAK
12	834.000	24.899	3.100	27.999	-18.001	46.000	QUASPEAK
13	900.000	25.318	6.100	31.418	-14.582	46.000	QUASPEAK
14	936.000	25.286	6.500	31.786	-14.214	46.000	QUASPEAK
15	999.200	24.632	2.100	26.732	-27.268	54.000	QUASPEAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SITE 2	Time : 2007/08/22 - 10:18
Limit : FCC_B_(Above_1G)_3M_AV	Margin : 6
EUT : Digital Still Camera	Probe : FCC_RF_1G-18G(2005-3) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 3: USB-LCD On

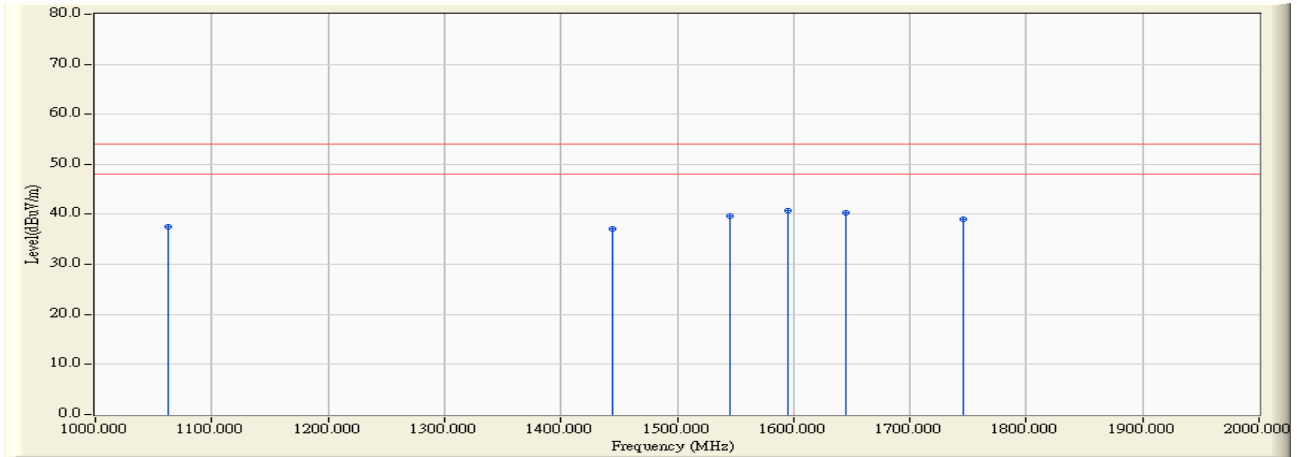


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	1062.120	-8.935	46.430	37.495	-16.505	54.000	PEAK
2	1444.880	-7.669	44.730	37.061	-16.939	54.000	PEAK
3	1545.090	-7.414	47.130	39.715	-14.285	54.000	PEAK
4	* 1595.190	-7.109	47.940	40.831	-13.169	54.000	PEAK
5	1645.290	-6.766	47.110	40.343	-13.657	54.000	PEAK
6	1745.490	-6.171	45.250	39.079	-14.921	54.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : SITE 2	Time : 2007/08/27 - 16:48
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Digital Still Camera	Probe : PRO 06-03-29 ST2 - HORIZONTAL
Power : AC 120V / 60Hz	Note : Mode 4: Preview

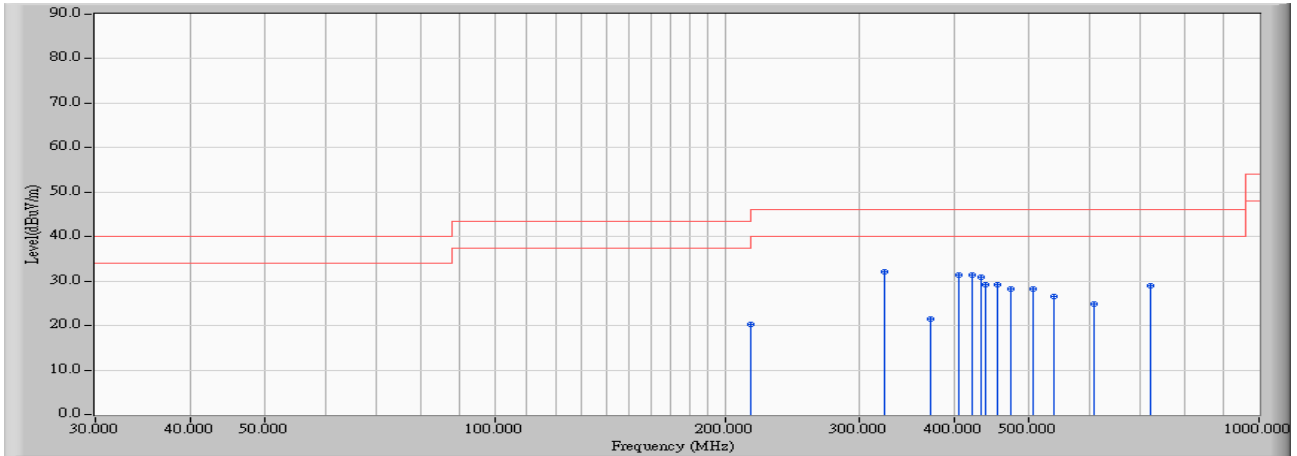


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	216.000	11.873	8.400	20.272	-23.228	43.500	QUASIPeAK
2	* 324.000	16.991	15.100	32.091	-13.909	46.000	QUASIPeAK
3	371.250	17.574	4.000	21.574	-24.426	46.000	QUASIPeAK
4	404.975	19.359	12.100	31.459	-14.541	46.000	QUASIPeAK
5	421.840	18.791	12.500	31.290	-14.710	46.000	QUASIPeAK
6	432.000	18.665	12.300	30.965	-15.035	46.000	QUASIPeAK
7	438.725	17.315	12.000	29.315	-16.685	46.000	QUASIPeAK
8	455.600	17.906	11.200	29.106	-16.894	46.000	QUASIPeAK
9	472.475	19.117	9.200	28.317	-17.683	46.000	QUASIPeAK
10	506.225	21.233	7.000	28.233	-17.767	46.000	QUASIPeAK
11	539.975	20.497	6.100	26.597	-19.403	46.000	QUASIPeAK
12	607.475	21.760	3.200	24.960	-21.040	46.000	QUASIPeAK
13	720.000	24.554	4.500	29.054	-16.946	46.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SITE 2	Time : 2007/08/22 - 10:03
Limit : FCC_B_(Above_1G)_3M_AV	Margin : 6
EUT : Digital Still Camera	Probe : FCC_RF_1G-18G(2005-3) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 4: Preview

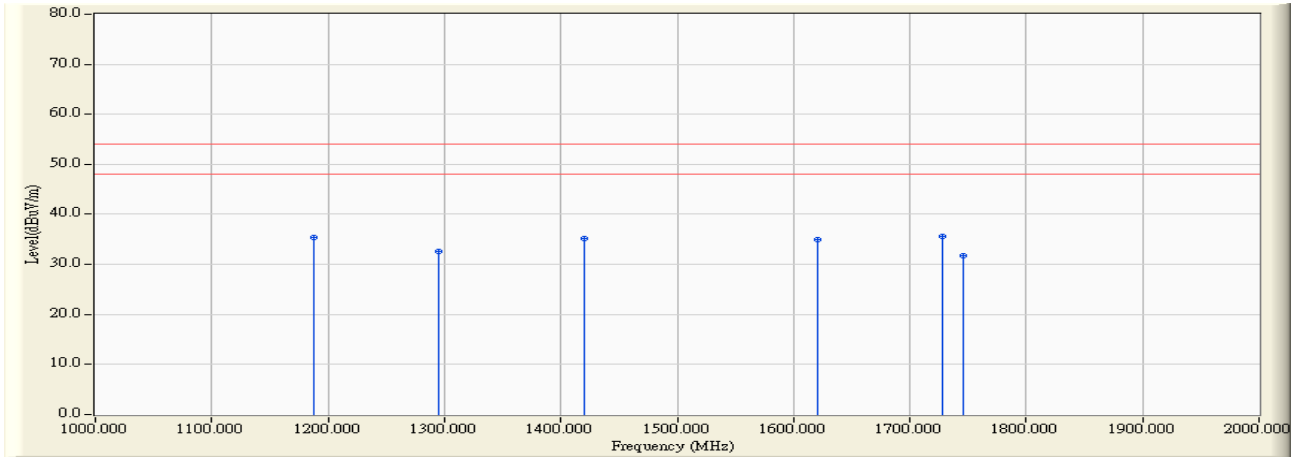


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	1188.373	-9.085	44.510	35.424	-18.576	54.000	PEAK
2	1294.580	-8.856	41.400	32.543	-21.457	54.000	PEAK
3	1420.800	-8.480	43.610	35.130	-18.870	54.000	PEAK
4	1621.240	-7.766	42.800	35.034	-18.966	54.000	PEAK
5	* 1727.450	-7.053	42.600	35.547	-18.453	54.000	PEAK
6	1745.890	-6.971	38.670	31.699	-22.301	54.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : SITE 2	Time : 2007/08/27 - 16:15
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Digital Still Camera	Probe : PRO 06-03-29 ST2 - VERTICAL
Power : AC 120V / 60Hz	Note : Mode 4: Preview

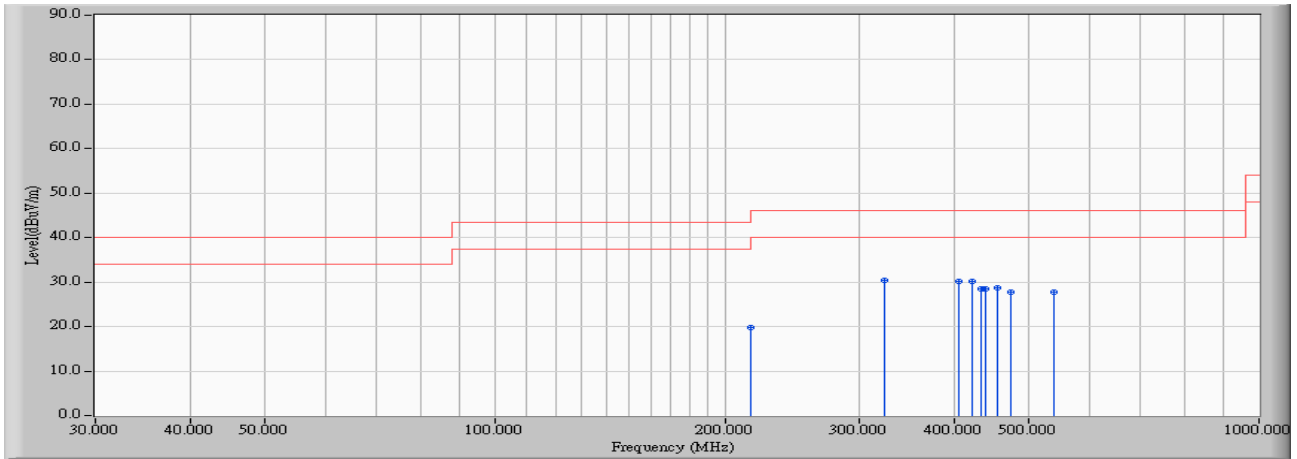


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		216.000	11.779	8.100	19.878	-23.622	43.500	QUASIPeAK
2	*	324.000	14.263	16.200	30.463	-15.537	46.000	QUASIPeAK
3		405.000	17.176	13.100	30.276	-15.724	46.000	QUASIPeAK
4		421.875	18.073	12.200	30.273	-15.727	46.000	QUASIPeAK
5		432.000	16.366	12.200	28.566	-17.434	46.000	QUASIPeAK
6		438.725	18.206	10.210	28.416	-17.584	46.000	QUASIPeAK
7		455.600	21.148	7.500	28.648	-17.352	46.000	QUASIPeAK
8		472.475	19.286	8.400	27.686	-18.314	46.000	QUASIPeAK
9		540.000	22.608	5.100	27.707	-18.293	46.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SITE 2	Time : 2007/08/22 - 10:22
Limit : FCC_B_(Above_1G)_3M_AV	Margin : 6
EUT : Digital Still Camera	Probe : FCC_RF_1G-18G(2005-3) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 4: Preview

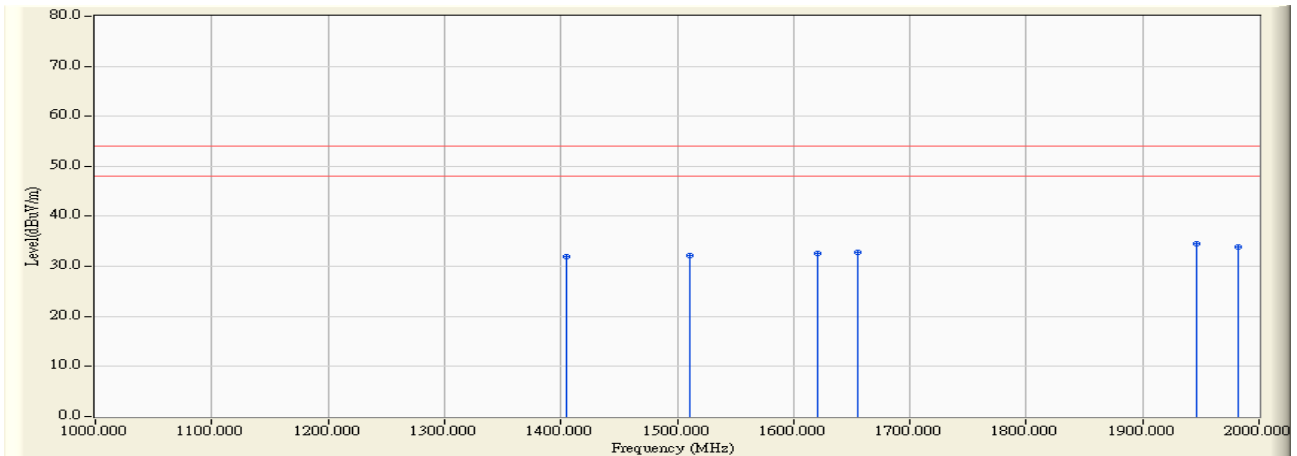

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	1404.800	-7.686	39.580	31.894	-22.106	54.000	PEAK
2	1511.020	-7.232	39.420	32.187	-21.813	54.000	PEAK
3	1621.240	-6.966	39.470	32.504	-21.496	54.000	PEAK
4	1655.310	-6.815	39.600	32.785	-21.215	54.000	PEAK
5	* 1945.890	-5.761	40.240	34.479	-19.521	54.000	PEAK
6	1981.960	-5.906	39.860	33.954	-20.046	54.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.