



Test Report

Product Name : Digital Still Camera
Model No. : DSC-S750
FCC ID : TVRDSCS750

Applicant : Hon Hai Precision Industry Co., Ltd. Nei-Hu Branch Office
Address : 1~11 F., No.32, Ji-hu Rd., Nei-hu, Taipei 114, Taiwan,
R.O.C.

Date of Receipt : 2007/11/16
Issued Date : 2007/11/26
Report No. : 07B232R-ITUSP01V02

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by CNLA, NVLAP, NIST or any agency of the Government.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : 2007/11/26
 Report No. : 07B232R-ITUSP01V02



Product Name : Digital Still Camera
 Applicant : Hon Hai Precision Industry Co., Ltd. Nei-Hu Branch Office
 Address : 1~11 F., No.32, Ji-hu Rd., Nei-hu, Taipei 114, Taiwan, R.O.C.
 Manufacturer : Hon Hai Precision Industry Co., Ltd. Nei-Hu Branch Office
 Model No. : DSC-S750
 Rated Voltage : AC 120 V / 60 Hz
 EUT Voltage : AC 120 V / 60 Hz
 Trade Name : SONY
 Applicable Standard : FCC CFR Title 47 Part 15 Subpart B: 2006 Class B,
 CISPR 22: 2006
 Test Result : Complied
 Performed Location : Hsinchu EMC Laboratory
 N0. 75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin
 Shiang, Hsinchu County 307, Taiwan, R.O.C.
 TEL:+886-3-592-8858 / FAX:+886-3-592-8859

Documented By : Sandy Chuang
 (Sandy Chuang / Engineering Adm. Specialist)

Reviewed By : Gavin Chen
 (Gavin Chen / Engineer)

Approved By : Arthur Liu
 (Arthur Liu / Deputy Manager)

Laboratory Information

We , **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited by the following accreditation Bodies in compliance with ISO 17025, EN 45001 and Guide 25:

| | |
|---------------|-------------------|
| Taiwan R.O.C. | : BSMI, DGT, CNLA |
| Germany | : TÜV Rheinland |
| Norway | : Nemko, DNV |
| USA | : FCC, NVLAP |
| Japan | : VCCI |

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://tw.quietek.com/modules/myalbum/>
 The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>
 If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
 TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com



LinKou Testing Laboratory :

No. 5, Ruei-Shu Valley, Ruei-Ping Tsuen, Lin-Kou Shiang, Taipei, Taiwan, R.O.C.
 TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com



TABLE OF CONTENTS

| Description | Page |
|--|------|
| 1. General Information..... | 5 |
| 1.1. EUT Description | 5 |
| 1.2. Mode of Operation..... | 6 |
| 1.3. Tested System Details | 7 |
| 1.4. Configuration of Tested System | 8 |
| 1.5. EUT Exercise Software..... | 10 |
| 2. Technical Test..... | 11 |
| 2.1. Summary of Test Result..... | 11 |
| 2.2. List of Test Equipment | 11 |
| 2.3. Measurement Uncertainty..... | 12 |
| 2.4. Test Environment..... | 12 |
| 3. Conducted Emission..... | 13 |
| 3.1. Test Specification..... | 13 |
| 3.2. Test Setup | 13 |
| 3.3. Limit..... | 13 |
| 3.4. Test Procedure | 14 |
| 3.5. Test Result..... | 15 |
| 3.6. Test Photograph | 31 |
| 4. Radiated Emission..... | 35 |
| 4.1. Test Specification..... | 35 |
| 4.2. Test Setup | 35 |
| 4.3. Limit..... | 36 |
| 4.4. Test Procedure | 37 |
| 4.5. Test Result..... | 38 |
| 4.6. Test Photograph | 54 |
| 5. Attachment | 62 |
| <input type="checkbox"/> EUT Photograph..... | 62 |

1. General Information

1.1. EUT Description

| | |
|--------------|----------------------|
| Product Name | Digital Still Camera |
| Trade Name | SONY |
| Model No. | DSC-S750 |

| Component | |
|---------------|---|
| USB Cable | Shielded, 1.5m, one ferrite core bonded. |
| AV Cable | Non-Shielded, 1.5m, one ferrite core bonded. |
| Battery | SONY, NP-BK1, 1Set |
| Power Adapter | SONY, AC-LS5 I/P: 100-240V, 50/60Hz, 11W, 0.19-0.11A, 19-26VA O/P: DC 4.2V, 1.7A Cable Out: Non-Shielded, 1.6m Power Cord: Non-Shielded, 0.9m |

Note:

1. This EUT is a Digital Still Camera.

1.2. Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

| | |
|---|---|
| Pre-Test Mode | |
| Mode 1: Slide show Mode 2: REC Mode 3: USB (Data Transmit) Mode 4: Preview | |
| Final Test Mode | |
| Emission | Mode 1: Slide show Mode 2: REC Mode 3: USB (Data Transmit) Mode 4: Preview |

1.3. Tested System Details


The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

| | | | | | | |
|-----------|---------|--|-----------|------------|--------|--------------------|
| Test Mode | | Mode 1: Slide show Mode 2: REC Mode 4: Preview | | | | |
| Product | | Manufacturer | Model No. | Serial No. | FCC ID | Power Cord |
| 1 | Monitor | SONY | PVM-14M2U | 2111391 | DoC | Non-Shielded, 1.8m |

| | | | | | | |
|-----------|-----------------------|-----------------------------|------------|-----------------|-----------|--------------------|
| Test Mode | | Mode 3: USB (Data Transmit) | | | | |
| Product | | Manufacturer | Model No. | Serial No. | FCC ID | Power Cord |
| 1 | Monitor | SONY | PVM-14M2U | 2111376 | DoC | Non-shielded, 1.8m |
| 2 | Monitor | CHI MEI | A170E1-09 | 3UC120955SA1227 | DoC | Non-shielded, 1.8m |
| 3 | Notebook PC | DELL | PP10L | 3Y220 | E2K24BNHM | Non-shielded, 1.8m |
| 4 | Printer | HP | C2642A | MY75J1D1D2 | DoC | Non-shielded, 0.7m |
| 5 | Digital 8 (D8) | SONY | DCR-TRV110 | P35209 | DoC | -- |
| 6 | Microphone & Earphone | TOKTO | SX-MI | N/A | DoC | -- |
| 7 | USB 2.0 Flash Memory | Sony | USM2GJX | N/A | DoC | -- |
| 8 | Modem | ACEEX | DM-2814 | 960018054 | DoC | Non-shielded, 1.6m |

1.4. Configuration of Tested System

| | | | |
|--|--|--|-----------|
| Test Mode | Mode 1: Slide show Mode 2: REC Mode 4: Preview | | |
| Connection Diagram | | | |
| <p>The diagram shows a dashed rectangular box containing two solid rectangular boxes. The box on the left is labeled 'EUT' and the box on the right is labeled 'Monitor (1)'. A horizontal line connects the top of the 'EUT' box to the top of the 'Monitor (1)' box. This line is labeled 'A' in the center. Vertical lines extend upwards from the top of each box to meet the horizontal line 'A'.</p> | | | |
| Signal Cable Type | | Signal cable Description | Interface |
| A | AV Cable | Non-Shielded, 1.5m, one ferrite core bonded. | AV Port |

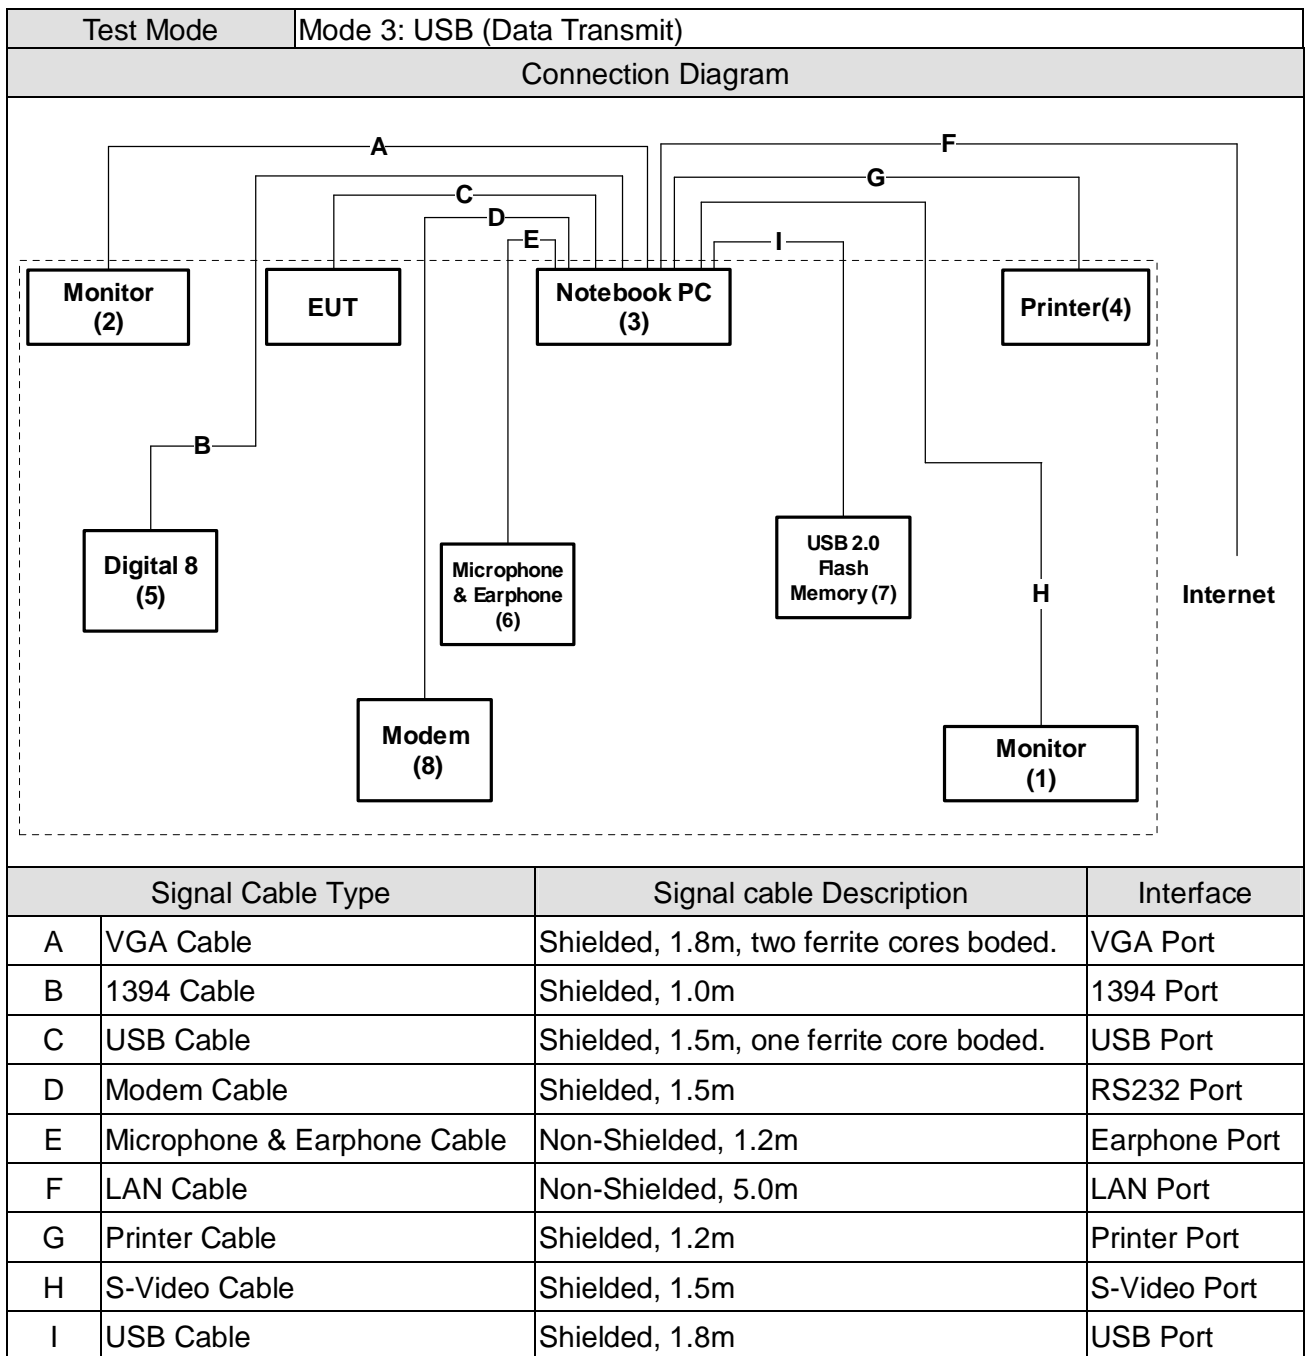

2. Technical Test

2.1. Summary of Test Result

- No deviations from the test standards
- Deviations from the test standards as below description:

| Emission | | | |
|--------------------|---|----------------|-----------|
| Performed Item | Normative References | Test Performed | Deviation |
| Conducted Emission | FCC CFR Title 47 Part 15 Subpart B: 2006 Class B, CISPR 22: 2006, ANSI C63.4: 2003 | Yes | No |
| Radiated Emission | FCC CFR Title 47 Part 15 Subpart B: 2006 Class B, CISPR 22: 2006, ANSI C63.4: 2003 | Yes | No |

2.2. List of Test Equipment

Conducted Emission / SR2

| Instrument | Manufacturer | Type No. | Serial No | Cal. Date |
|--------------------------|--------------|----------|-------------|------------|
| 4-Wire ISN | R & S | ENY 41 | 837032/001 | 2007/04/15 |
| Artificial Mains Network | R & S | ENV4200 | 848411/010 | 2007/03/13 |
| Double 2-Wire ISN | R & S | ENY 22 | 835354/008 | 2007/04/15 |
| LISN | R & S | ESH3-Z5 | 825562/002 | 2007/03/31 |
| Pulse Limiter | R & S | ZSH3Z2 | 357.8810.54 | 2007/07/19 |
| Test Receiver | R & S | ESCS 30 | 100122 | 2007/02/21 |

Radiated Emission / Site2

| Instrument | Manufacturer | Type No. | Serial No | Cal. Date |
|-------------------|-----------------|----------|------------|------------|
| Bilog Antenna | Schaffner Chase | CBL6112B | 2708 | 2007/09/03 |
| Horn Antenna | Electro Metrics | EM-6961 | 103325 | 2007/03/15 |
| Pre-Amplifier | HP | 8449B | 3008A01123 | 2007/11/15 |
| Pre-Amplifier | Quietek | AP-025C | 002 | N/A |
| Spectrum Analyzer | R & S | FSP40 | 100005 | 2007/08/25 |
| Spectrum Analyzer | Advantest | R3162 | 121200166 | 2007/02/19 |
| Test Receiver | R & S | ESCS 30 | 836858/023 | 2007/04/01 |

2.3. Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.26 dB.

Radiated Emission

The measurement uncertainty is evaluated as ± 3.19 dB.

2.4. Test Environment


| Performed Item | Items | Required | Actual |
|--------------------|----------------------------|----------|----------|
| Conducted Emission | Temperature (°C) | 15-35 | 25 |
| | Humidity (%RH) | 25-75 | 50 |
| | Barometric pressure (mbar) | 860-1060 | 950-1000 |
| Radiated Emission | Temperature (°C) | 15-35 | 25 |
| | Humidity (%RH) | 25-75 | 65 |
| | Barometric pressure (mbar) | 860-1060 | 950-1000 |

3. Conducted Emission

3.1. Test Specification

According to Standard: FCC Part 15 Subpart B, ANSI C63.4

3.2. Test Setup

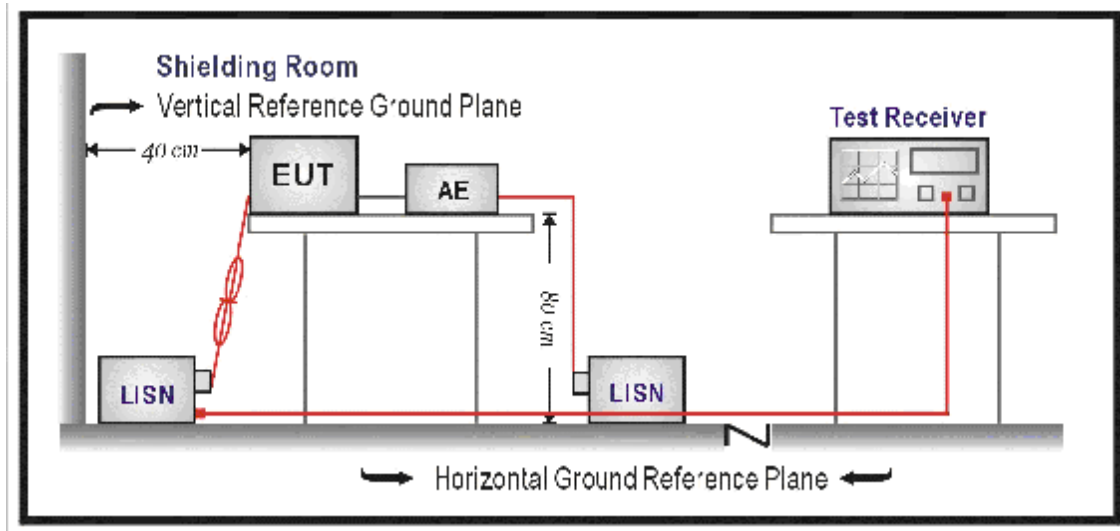

3.3. Limit

| Limits | | |
|-----------------|-----------|-----------|
| Frequency (MHz) | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50 | 66 - 56 | 56 - 46 |
| 0.50-5.0 | 56 | 46 |
| 5.0 - 30 | 60 | 50 |

Remarks: In the above table, the tighter limit applies at the band edges.

3.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.


(Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Test Result

| | |
|----------------------------|------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 16:37 |
| Limit : CISPR_B_00M_QP | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line1 |
| Power : AC 120V/60Hz | Note :Mode 1: Slide show |

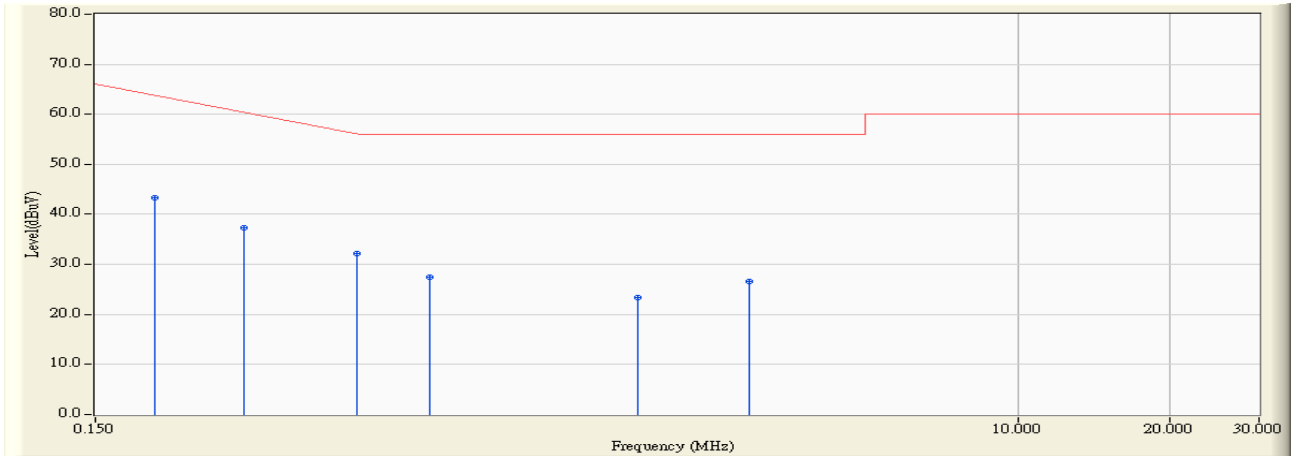


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | * | 0.197 | 0.060 | 43.310 | 43.370 | -21.287 | 64.657 | QUASIPeAK |
| 2 | | 0.295 | 0.060 | 37.190 | 37.250 | -24.607 | 61.857 | QUASIPeAK |
| 3 | | 0.494 | 0.070 | 32.080 | 32.150 | -24.021 | 56.171 | QUASIPeAK |
| 4 | | 0.689 | 0.070 | 27.290 | 27.360 | -28.640 | 56.000 | QUASIPeAK |
| 5 | | 1.771 | 0.157 | 23.150 | 23.307 | -32.693 | 56.000 | QUASIPeAK |
| 6 | | 2.955 | 0.200 | 26.480 | 26.680 | -29.320 | 56.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 16:37 |
| Limit : CISPR_B_00M_AV | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line1 |
| Power : AC 120V/60Hz | Note :Mode 1: Slide show |

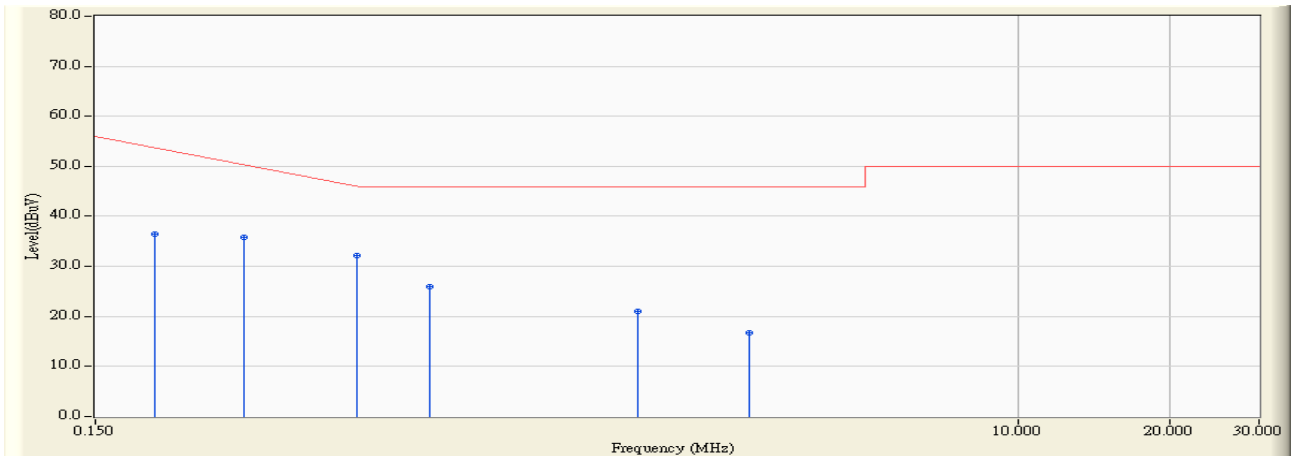


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | | 0.197 | 0.060 | 36.480 | 36.540 | -18.117 | 54.657 | AVERAGE |
| 2 | | 0.295 | 0.060 | 35.820 | 35.880 | -15.977 | 51.857 | AVERAGE |
| 3 | * | 0.494 | 0.070 | 32.070 | 32.140 | -14.031 | 46.171 | AVERAGE |
| 4 | | 0.689 | 0.070 | 25.830 | 25.900 | -20.100 | 46.000 | AVERAGE |
| 5 | | 1.771 | 0.157 | 20.760 | 20.917 | -25.083 | 46.000 | AVERAGE |
| 6 | | 2.955 | 0.200 | 16.580 | 16.780 | -29.220 | 46.000 | AVERAGE |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 16:40 |
| Limit : CISPR_B_00M_QP | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line2 |
| Power : AC 120V/60Hz | Note :Mode 1: Slide show |

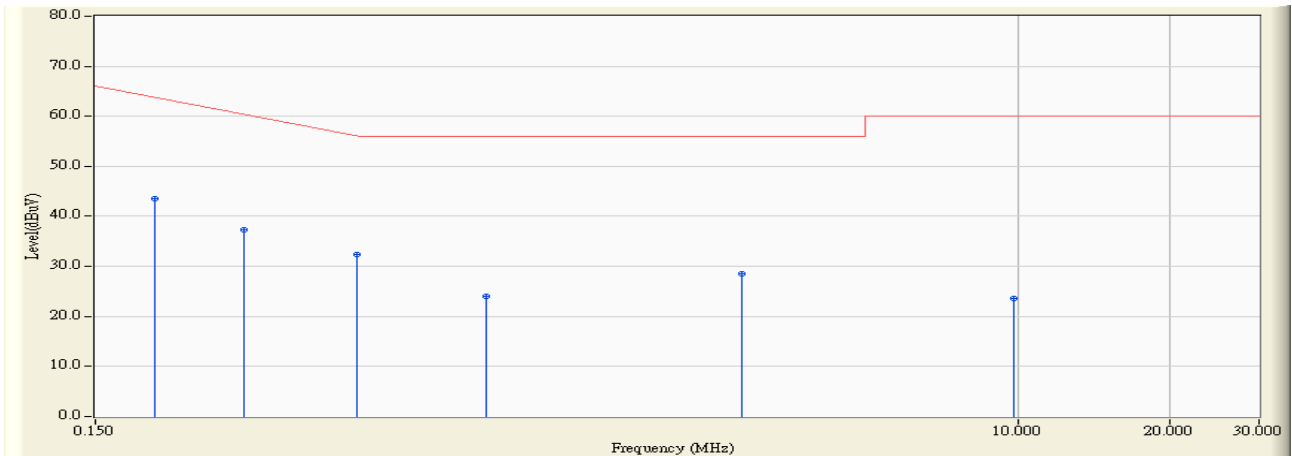


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | * | 0.197 | 0.060 | 43.390 | 43.450 | -21.207 | 64.657 | QUASPEAK |
| 2 | | 0.295 | 0.060 | 37.190 | 37.250 | -24.607 | 61.857 | QUASPEAK |
| 3 | | 0.494 | 0.070 | 32.230 | 32.300 | -23.871 | 56.171 | QUASPEAK |
| 4 | | 0.888 | 0.070 | 23.870 | 23.940 | -32.060 | 56.000 | QUASPEAK |
| 5 | | 2.857 | 0.140 | 28.300 | 28.440 | -27.560 | 56.000 | QUASPEAK |
| 6 | | 9.849 | 0.420 | 23.160 | 23.580 | -36.420 | 60.000 | QUASPEAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 16:40 |
| Limit : CISPR_B_00M_AV | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line2 |
| Power : AC 120V/60Hz | Note :Mode 1: Slide show |

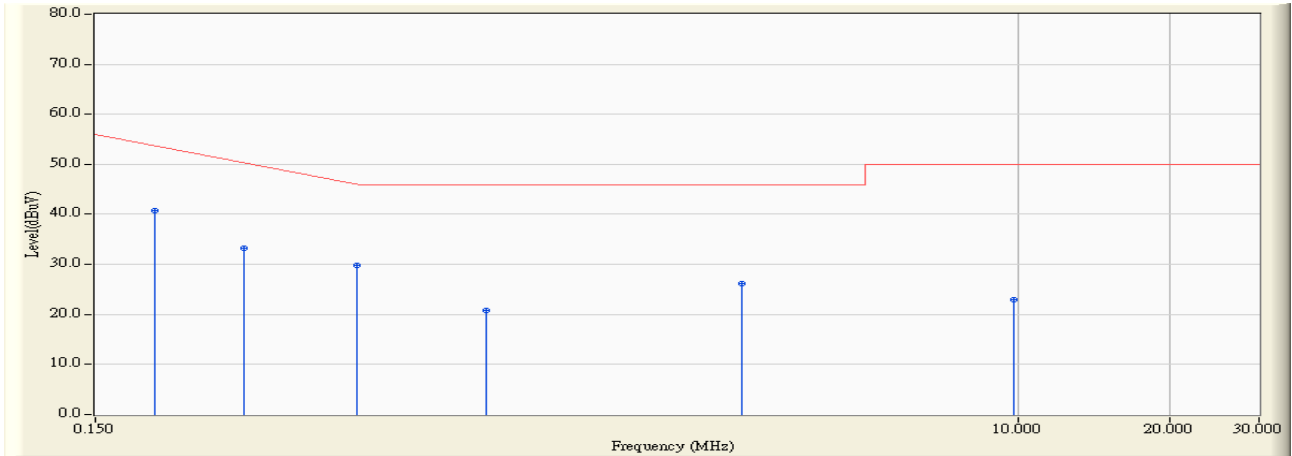


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | * | 0.197 | 0.060 | 40.780 | 40.840 | -13.817 | 54.657 | AVERAGE |
| 2 | | 0.295 | 0.060 | 33.130 | 33.190 | -18.667 | 51.857 | AVERAGE |
| 3 | | 0.494 | 0.070 | 29.770 | 29.840 | -16.331 | 46.171 | AVERAGE |
| 4 | | 0.888 | 0.070 | 20.760 | 20.830 | -25.170 | 46.000 | AVERAGE |
| 5 | | 2.857 | 0.140 | 26.010 | 26.150 | -19.850 | 46.000 | AVERAGE |
| 6 | | 9.849 | 0.420 | 22.490 | 22.910 | -27.090 | 50.000 | AVERAGE |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 16:52 |
| Limit : CISPR_B_00M_QP | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line1 |
| Power : AC 120V/60Hz | Note : Mode 2: REC |

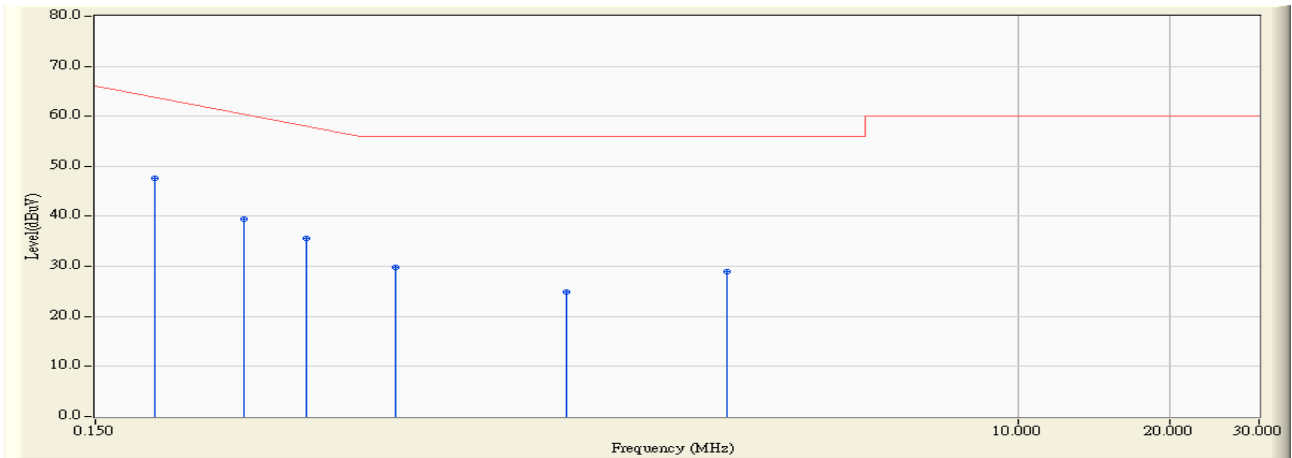


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | * | 0.197 | 0.060 | 47.510 | 47.570 | -17.087 | 64.657 | QUASIPeAK |
| 2 | | 0.295 | 0.060 | 39.350 | 39.410 | -22.447 | 61.857 | QUASIPeAK |
| 3 | | 0.392 | 0.070 | 35.630 | 35.700 | -23.386 | 59.086 | QUASIPeAK |
| 4 | | 0.588 | 0.070 | 29.700 | 29.770 | -26.230 | 56.000 | QUASIPeAK |
| 5 | | 1.279 | 0.100 | 24.700 | 24.800 | -31.200 | 56.000 | QUASIPeAK |
| 6 | | 2.654 | 0.190 | 28.680 | 28.870 | -27.130 | 56.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 16:52 |
| Limit : CISPR_B_00M_AV | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line1 |
| Power : AC 120V/60Hz | Note : Mode 2: REC |

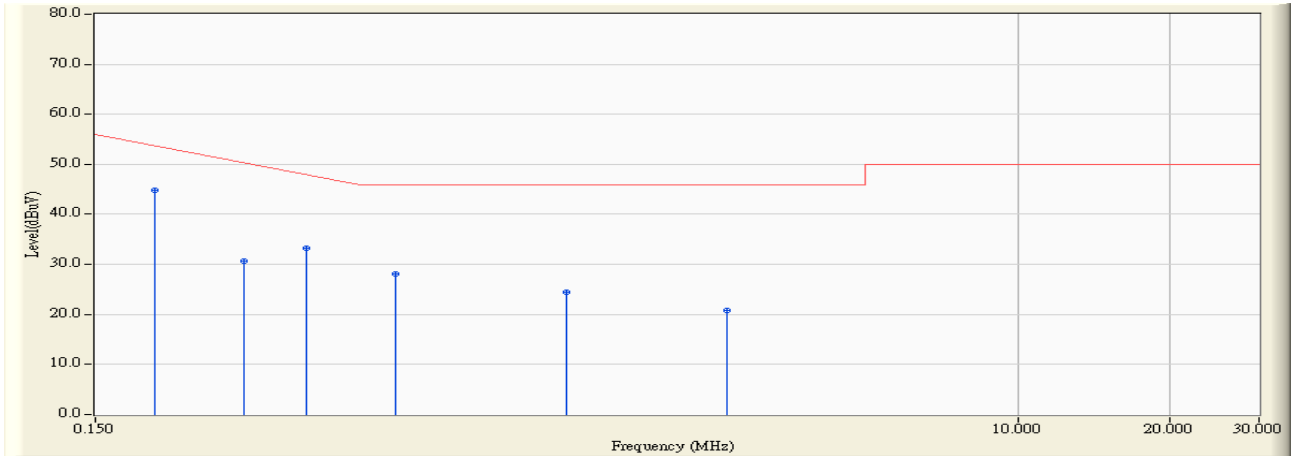


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | * | 0.197 | 0.060 | 44.850 | 44.910 | -9.747 | 54.657 | AVERAGE |
| 2 | | 0.295 | 0.060 | 30.580 | 30.640 | -21.217 | 51.857 | AVERAGE |
| 3 | | 0.392 | 0.070 | 33.210 | 33.280 | -15.806 | 49.086 | AVERAGE |
| 4 | | 0.588 | 0.070 | 27.920 | 27.990 | -18.010 | 46.000 | AVERAGE |
| 5 | | 1.279 | 0.100 | 24.330 | 24.430 | -21.570 | 46.000 | AVERAGE |
| 6 | | 2.654 | 0.190 | 20.510 | 20.700 | -25.300 | 46.000 | AVERAGE |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 16:55 |
| Limit : CISPR_B_00M_QP | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line2 |
| Power : AC 120V/60Hz | Note : Mode 2: REC |

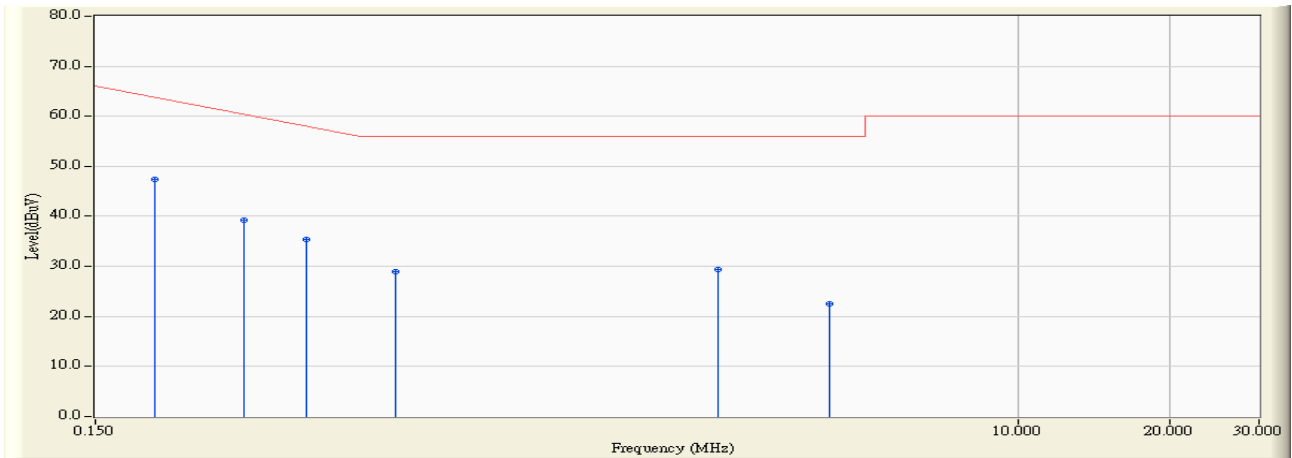


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | * | 0.197 | 0.060 | 47.310 | 47.370 | -17.287 | 64.657 | QUASIPeAK |
| 2 | | 0.295 | 0.060 | 39.150 | 39.210 | -22.647 | 61.857 | QUASIPeAK |
| 3 | | 0.392 | 0.070 | 35.350 | 35.420 | -23.666 | 59.086 | QUASIPeAK |
| 4 | | 0.588 | 0.070 | 28.840 | 28.910 | -27.090 | 56.000 | QUASIPeAK |
| 5 | | 2.556 | 0.120 | 29.210 | 29.330 | -26.670 | 56.000 | QUASIPeAK |
| 6 | | 4.232 | 0.222 | 22.260 | 22.482 | -33.518 | 56.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 16:55 |
| Limit : CISPR_B_00M_AV | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line2 |
| Power : AC 120V/60Hz | Note : Mode 2: REC |

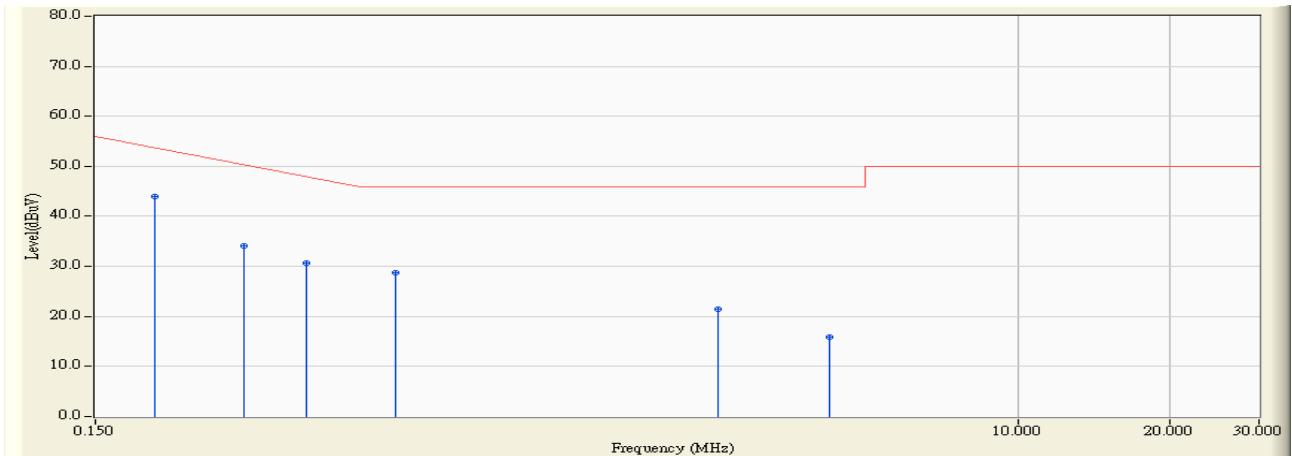


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | * | 0.197 | 0.060 | 43.830 | 43.890 | -10.767 | 54.657 | AVERAGE |
| 2 | | 0.295 | 0.060 | 34.100 | 34.160 | -17.697 | 51.857 | AVERAGE |
| 3 | | 0.392 | 0.070 | 30.680 | 30.750 | -18.336 | 49.086 | AVERAGE |
| 4 | | 0.588 | 0.070 | 28.620 | 28.690 | -17.310 | 46.000 | AVERAGE |
| 5 | | 2.556 | 0.120 | 21.240 | 21.360 | -24.640 | 46.000 | AVERAGE |
| 6 | | 4.232 | 0.222 | 15.610 | 15.832 | -30.168 | 46.000 | AVERAGE |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 17:19 |
| Limit : CISPR_B_00M_QP | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line1 |
| Power : AC 120V/60Hz | Note : Mode 3: USB (Data Transmit) |

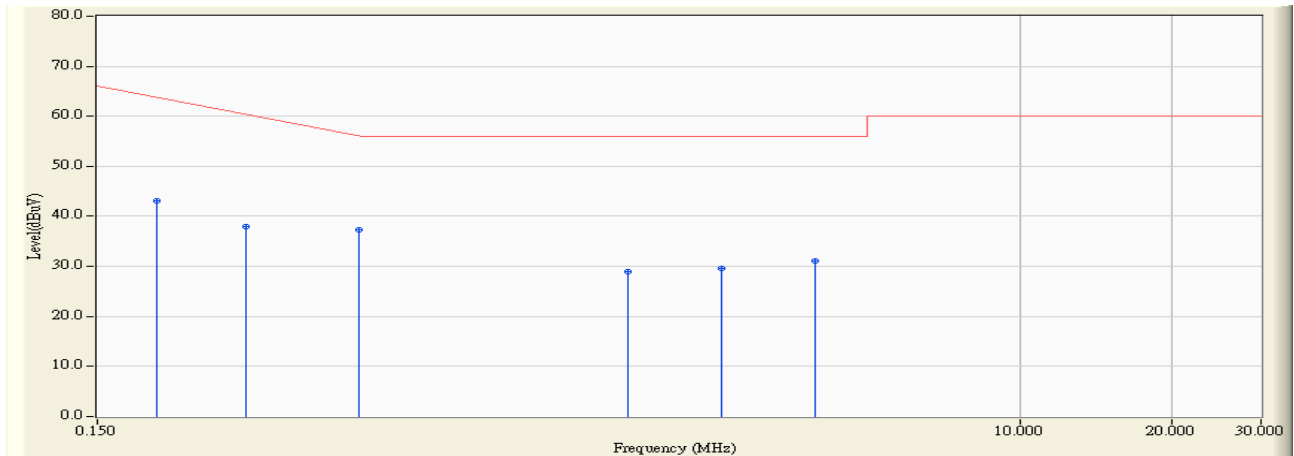


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | | 0.197 | 0.060 | 42.980 | 43.040 | -21.617 | 64.657 | QUASIPeAK |
| 2 | | 0.295 | 0.060 | 37.930 | 37.990 | -23.867 | 61.857 | QUASIPeAK |
| 3 | * | 0.494 | 0.070 | 37.210 | 37.280 | -18.891 | 56.171 | QUASIPeAK |
| 4 | | 1.677 | 0.150 | 28.750 | 28.900 | -27.100 | 56.000 | QUASIPeAK |
| 5 | | 2.564 | 0.190 | 29.440 | 29.630 | -26.370 | 56.000 | QUASIPeAK |
| 6 | | 3.943 | 0.220 | 30.830 | 31.050 | -24.950 | 56.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 17:19 |
| Limit : CISPR_B_00M_AV | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line1 |
| Power : AC 120V/60Hz | Note : Mode 3: USB (Data Transmit) |

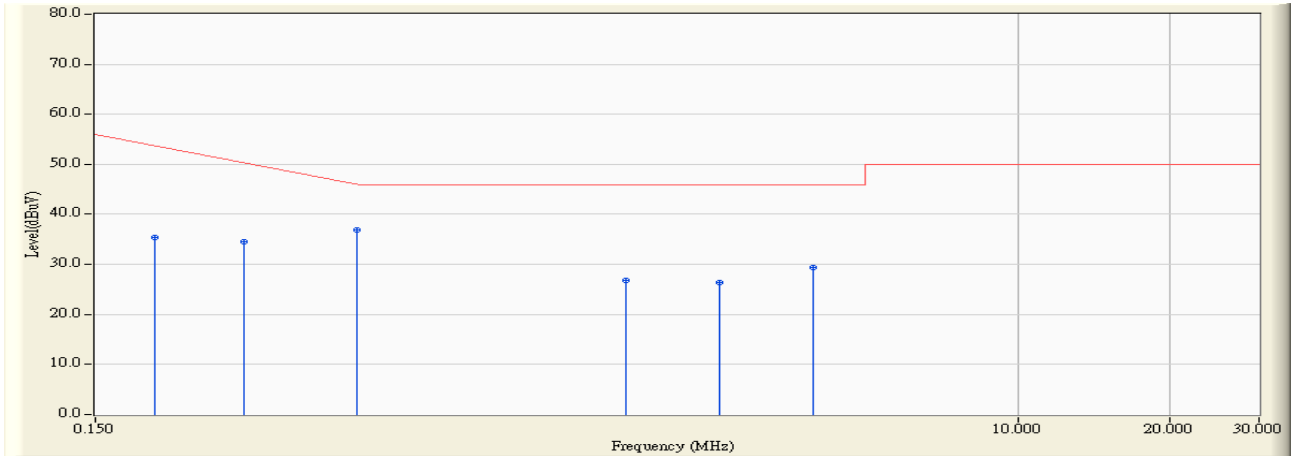


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | | 0.197 | 0.060 | 35.270 | 35.330 | -19.327 | 54.657 | AVERAGE |
| 2 | | 0.295 | 0.060 | 34.510 | 34.570 | -17.287 | 51.857 | AVERAGE |
| 3 | * | 0.494 | 0.070 | 36.810 | 36.880 | -9.291 | 46.171 | AVERAGE |
| 4 | | 1.677 | 0.150 | 26.660 | 26.810 | -19.190 | 46.000 | AVERAGE |
| 5 | | 2.564 | 0.190 | 26.230 | 26.420 | -19.580 | 46.000 | AVERAGE |
| 6 | | 3.943 | 0.220 | 29.150 | 29.370 | -16.630 | 46.000 | AVERAGE |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 17:22 |
| Limit : CISPR_B_00M_QP | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line2 |
| Power : AC 120V/60Hz | Note : Mode 3: USB (Data Transmit) |

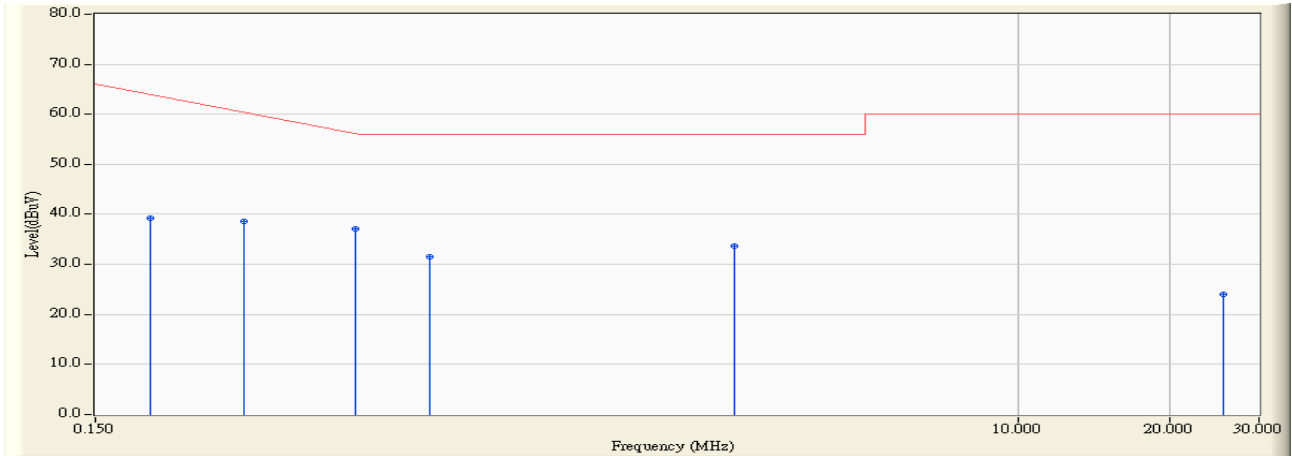


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|---|--------------------|------------------------|-------------------------|-------------------------|----------------|-----------------|---------------|
| 1 | | 0.193 | 0.060 | 39.220 | 39.280 | -25.491 | 64.771 | QUASIPeAK |
| 2 | | 0.295 | 0.060 | 38.590 | 38.650 | -23.207 | 61.857 | QUASIPeAK |
| 3 | * | 0.490 | 0.070 | 36.970 | 37.040 | -19.246 | 56.286 | QUASIPeAK |
| 4 | | 0.689 | 0.070 | 31.410 | 31.480 | -24.520 | 56.000 | QUASIPeAK |
| 5 | | 2.759 | 0.139 | 33.560 | 33.699 | -22.301 | 56.000 | QUASIPeAK |
| 6 | | 25.517 | 1.000 | 22.940 | 23.940 | -36.060 | 60.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 17:22 |
| Limit : CISPR_B_00M_AV | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line2 |
| Power : AC 120V/60Hz | Note : Mode 3: USB (Data Transmit) |

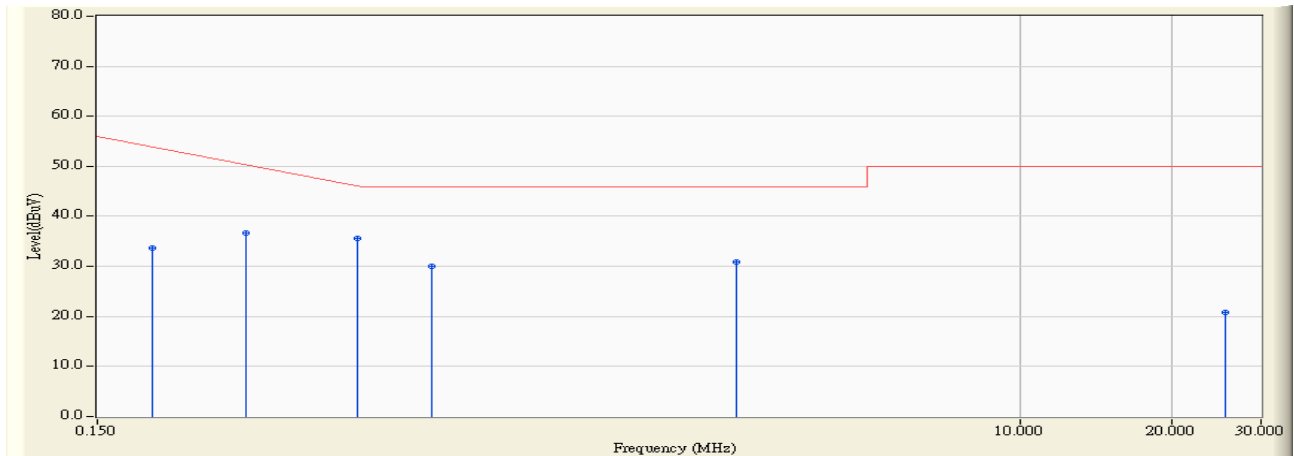


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | 0.193 | 0.060 | 33.580 | 33.640 | -21.131 | 54.771 | AVERAGE |
| 2 | 0.295 | 0.060 | 36.700 | 36.760 | -15.097 | 51.857 | AVERAGE |
| 3 | * | 0.070 | 35.470 | 35.540 | -10.746 | 46.286 | AVERAGE |
| 4 | 0.689 | 0.070 | 29.960 | 30.030 | -15.970 | 46.000 | AVERAGE |
| 5 | 2.759 | 0.139 | 30.780 | 30.919 | -15.081 | 46.000 | AVERAGE |
| 6 | 25.517 | 1.000 | 19.830 | 20.830 | -29.170 | 50.000 | AVERAGE |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 17:42 |
| Limit : CISPR_B_00M_QP | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line1 |
| Power : AC 120V/60Hz | Note : Mode 4: Preview |

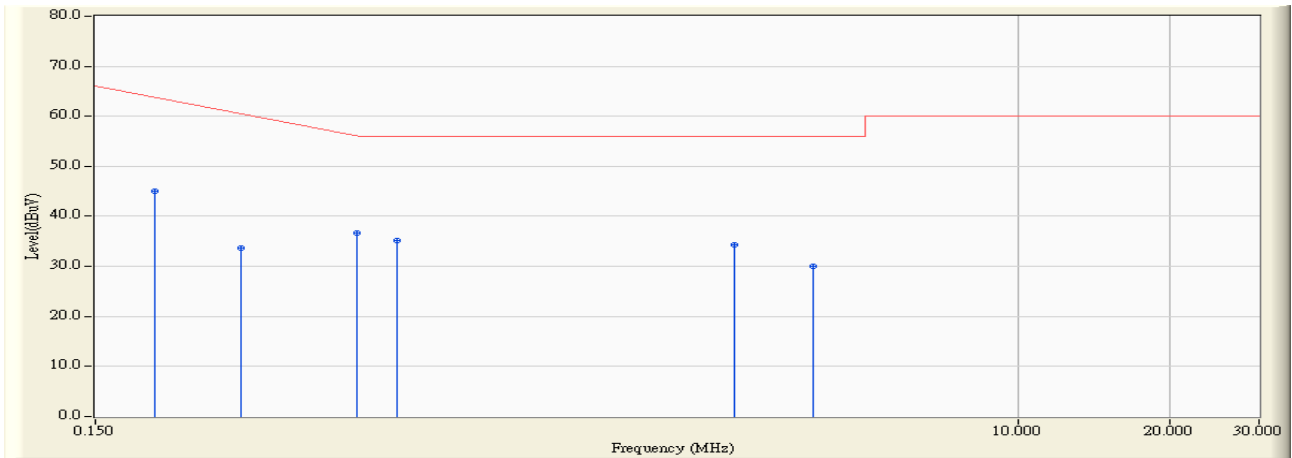


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | | 0.197 | 0.060 | 44.930 | 44.990 | -19.667 | 64.657 | QUASIPeAK |
| 2 | | 0.291 | 0.060 | 33.570 | 33.630 | -28.341 | 61.971 | QUASIPeAK |
| 3 | * | 0.494 | 0.070 | 36.710 | 36.780 | -19.391 | 56.171 | QUASIPeAK |
| 4 | | 0.591 | 0.070 | 35.130 | 35.200 | -20.800 | 56.000 | QUASIPeAK |
| 5 | | 2.759 | 0.199 | 34.020 | 34.219 | -21.781 | 56.000 | QUASIPeAK |
| 6 | | 3.939 | 0.220 | 29.780 | 30.000 | -26.000 | 56.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 17:42 |
| Limit : CISPR_B_00M_AV | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line1 |
| Power : AC 120V/60Hz | Note : Mode 4: Preview |

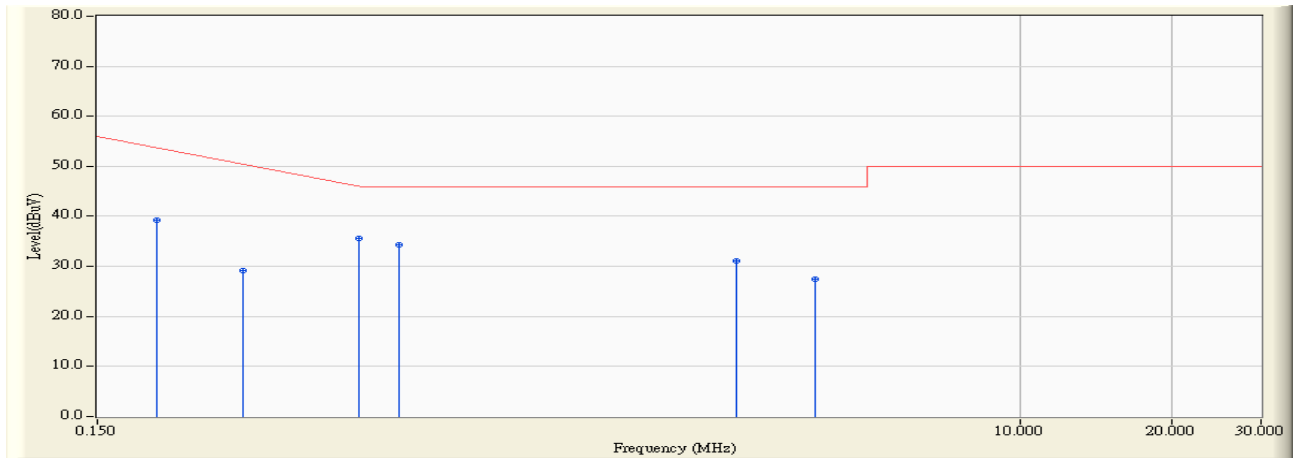


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | | 0.197 | 0.060 | 39.290 | 39.350 | -15.307 | 54.657 | AVERAGE |
| 2 | | 0.291 | 0.060 | 29.210 | 29.270 | -22.701 | 51.971 | AVERAGE |
| 3 | * | 0.494 | 0.070 | 35.590 | 35.660 | -10.511 | 46.171 | AVERAGE |
| 4 | | 0.591 | 0.070 | 34.170 | 34.240 | -11.760 | 46.000 | AVERAGE |
| 5 | | 2.759 | 0.199 | 30.880 | 31.079 | -14.921 | 46.000 | AVERAGE |
| 6 | | 3.939 | 0.220 | 27.220 | 27.440 | -18.560 | 46.000 | AVERAGE |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 17:45 |
| Limit : CISPR_B_00M_QP | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line2 |
| Power : AC 120V/60Hz | Note : Mode 4: Preview |

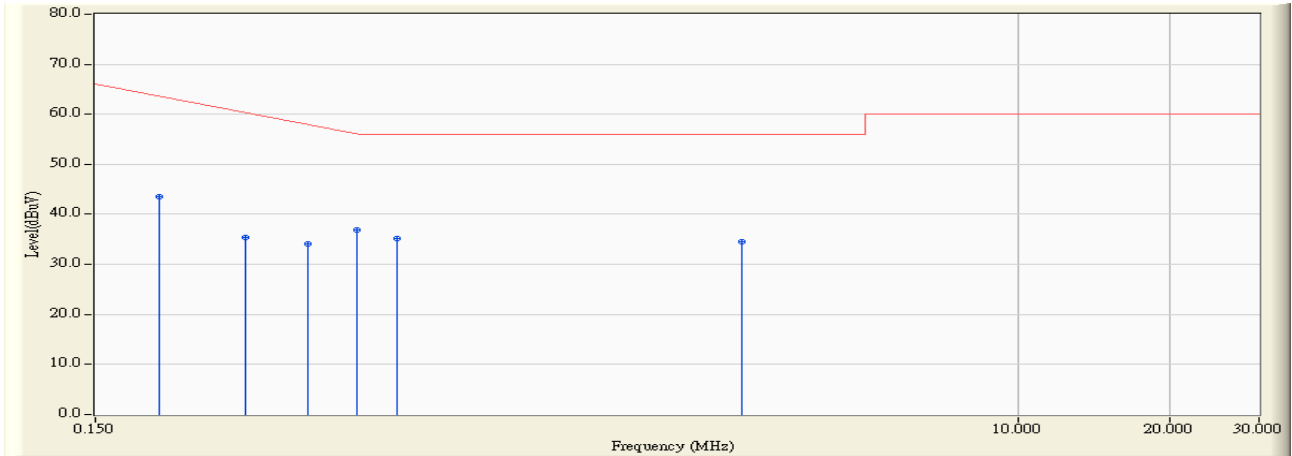


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | 0.200 | 0.060 | 43.410 | 43.470 | -21.101 | 64.571 | QUASIPeAK |
| 2 | 0.298 | 0.060 | 35.310 | 35.370 | -26.401 | 61.771 | QUASIPeAK |
| 3 | 0.396 | 0.070 | 34.090 | 34.160 | -24.811 | 58.971 | QUASIPeAK |
| 4 | * 0.494 | 0.070 | 36.910 | 36.980 | -19.191 | 56.171 | QUASIPeAK |
| 5 | 0.591 | 0.070 | 35.030 | 35.100 | -20.900 | 56.000 | QUASIPeAK |
| 6 | 2.857 | 0.140 | 34.410 | 34.550 | -21.450 | 56.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|----------------------------|------------------------------|
| Site : ShieldingRoom 2 | Time : 2007/11/19 - 17:45 |
| Limit : CISPR_B_00M_AV | Margin : 0 |
| EUT : Digital Still Camera | Probe : QTK-LISN-SR2 - Line2 |
| Power : AC 120V/60Hz | Note : Mode 4: Preview |

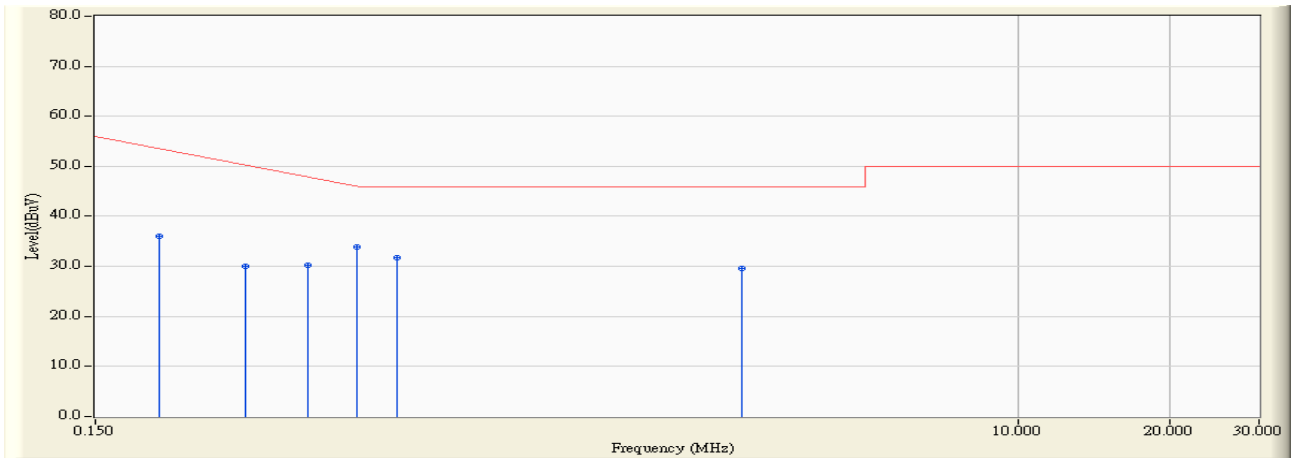

| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|---|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | 0.200 | 0.060 | 36.040 | 36.100 | -18.471 | 54.571 | AVERAGE |
| 2 | 0.298 | 0.060 | 30.060 | 30.120 | -21.651 | 51.771 | AVERAGE |
| 3 | 0.396 | 0.070 | 30.170 | 30.240 | -18.731 | 48.971 | AVERAGE |
| 4 | * 0.494 | 0.070 | 33.880 | 33.950 | -12.221 | 46.171 | AVERAGE |
| 5 | 0.591 | 0.070 | 31.760 | 31.830 | -14.170 | 46.000 | AVERAGE |
| 6 | 2.857 | 0.140 | 29.500 | 29.640 | -16.360 | 46.000 | AVERAGE |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.


4. Radiated Emission

4.1. Test Specification


According to EMC Standard: FCC Part 15 Subpart B, ANSI C63.4

4.2. Test Setup

Under 1GHz Test Setup:

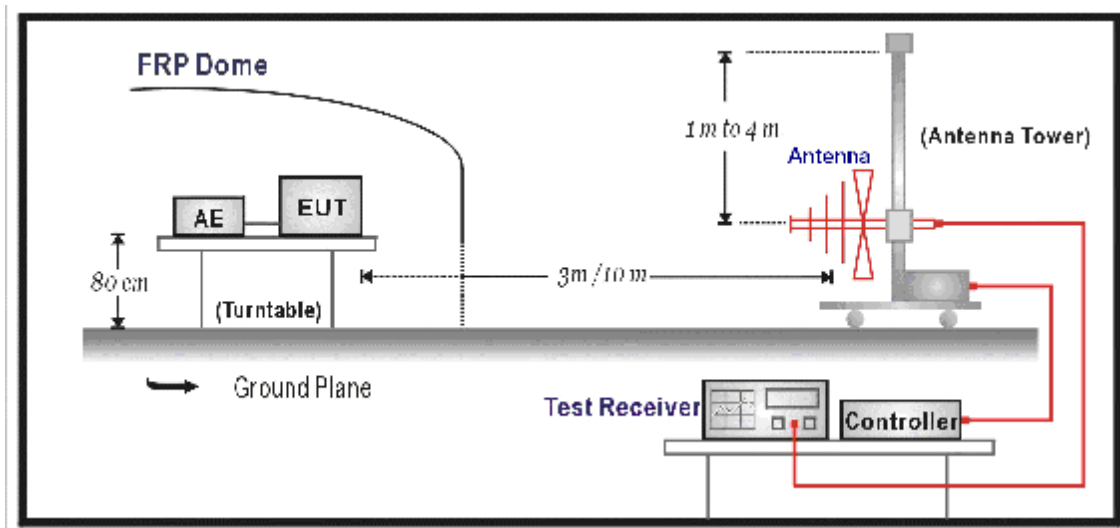

Above 1GHz Test Setup:

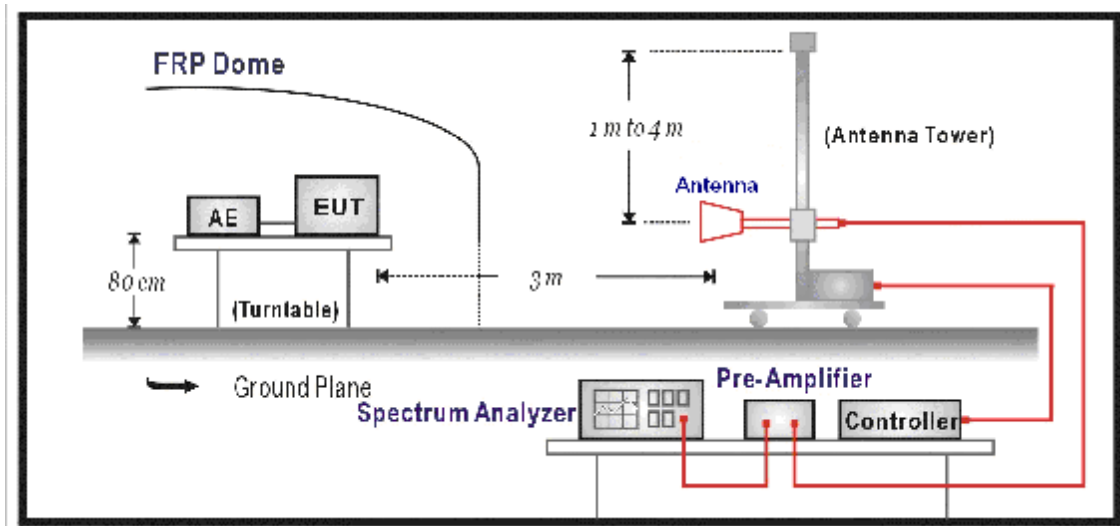

4.3. Limit

| FCC Part 15 Subpart B Paragraph 15.109 Limits (dBuV/m) | | |
|---|---------------------|---------------|
| Frequency (MHz) | Distance (m) | dBuV/m |
| 30-88 | 3 | 40 |
| 88-216 | 3 | 43.5 |
| 216-960 | 3 | 46 |
| Above 960 | 3 | 54 |

Remark:

1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground.

The turn table can rotate 360 degrees to determine the position of the maximum emission level and the antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.

For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

| Highest frequency generated or used in the device or on which the device operates or tunes (MHz) | Upper frequency of measurement range (MHz) |
|--|---|
| Below 1.705 | 30 |
| 1.705 – 108 | 1000 |
| 108 – 500 | 2000 |
| 500 – 1000 | 5000 |
| Above 1000 | 5 th harmonic of the highest frequency or 40 GHz, whichever is lower |

On any frequency or frequencies below or equal to 1000 MHz, the radiated limits shown are based on measuring equipment employing a quasi-peak detector function and above 1000 MHz, the radiated limits shown are based measuring equipment employing an average detector function.

When average radiated emission measurement are included emission measurement Above 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.


For class A, the measurement distance between the EUT and antenna is 10 meters for under 1GHz and above 1GHz.

For class B, the measurement distance between the EUT and antenna is 3 meters for under 1GHz and 3 meters for above 1GHz.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz and above 1GHz is 1MHz.

4.5. Test Result

| | |
|----------------------------|---------------------------------------|
| Site : SITE 2 | Time : 2007/11/16 - 16:07 |
| Limit : FCC_CLASS_B_03M_QP | Margin : 6 |
| EUT : Digital Still Camera | Probe : PRO 06-03-29 ST2 - HORIZONTAL |
| Power : AC120V / 60Hz | Note : Mode 1: Slide Show |

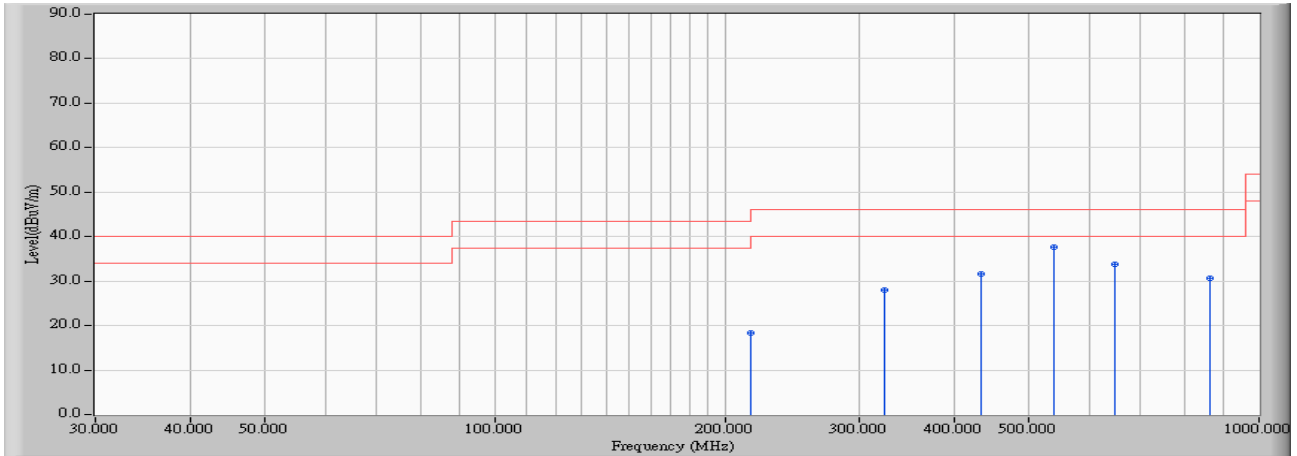


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|---|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | 216.000 | 11.873 | 6.370 | 18.242 | -25.258 | 43.500 | QUASIPeAK |
| 2 | 324.000 | 16.991 | 11.020 | 28.011 | -17.989 | 46.000 | QUASIPeAK |
| 3 | 432.000 | 18.665 | 12.960 | 31.625 | -14.375 | 46.000 | QUASIPeAK |
| 4 | * 540.000 | 20.501 | 17.090 | 37.591 | -8.409 | 46.000 | QUASIPeAK |
| 5 | 648.000 | 24.192 | 9.650 | 33.842 | -12.158 | 46.000 | QUASIPeAK |
| 6 | 864.000 | 24.920 | 5.740 | 30.660 | -15.340 | 46.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|--------------------------------|--|
| Site : Site 2 | Time : 2007/11/23 - 15:00 |
| Limit : FCC_B_(Above_1G)_3M_AV | Margin : 6 |
| EUT : Digital Still Camera | Probe : FCC_RF_1G-18G(2005-3) - HORIZONTAL |
| Power : AC 120V/60Hz | Note : Mode 1: Slide Show |

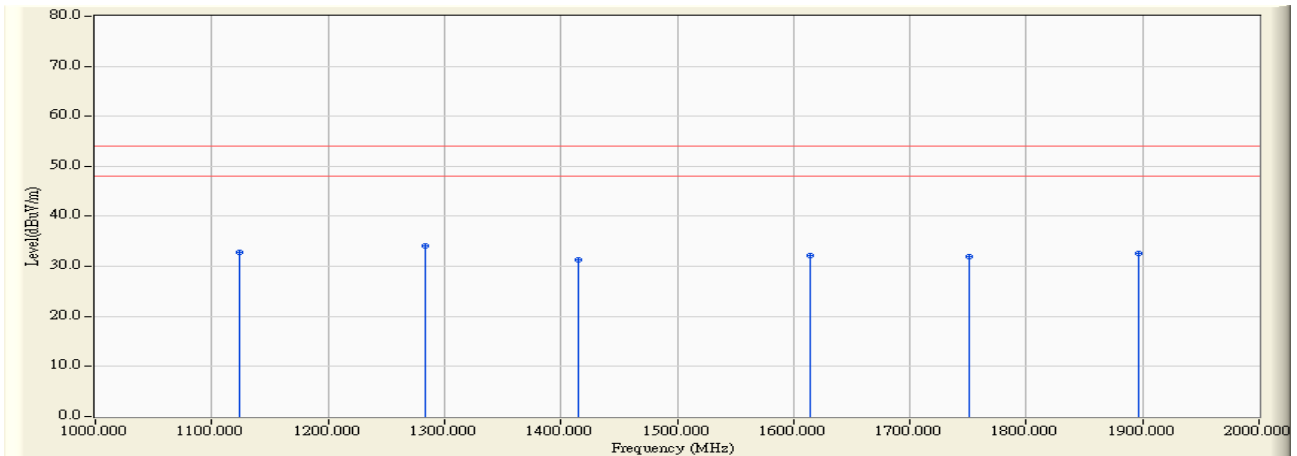


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|---|---|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | | 1124.130 | -9.446 | 42.350 | 32.904 | -21.096 | 54.000 | PEAK |
| 2 | * | 1284.050 | -8.916 | 43.050 | 34.135 | -19.865 | 54.000 | PEAK |
| 3 | | 1415.580 | -8.480 | 39.870 | 31.390 | -22.610 | 54.000 | PEAK |
| 4 | | 1614.250 | -7.807 | 40.080 | 32.273 | -21.727 | 54.000 | PEAK |
| 5 | | 1751.120 | -7.018 | 38.970 | 31.952 | -22.048 | 54.000 | PEAK |
| 6 | | 1897.060 | -5.467 | 38.080 | 32.613 | -21.387 | 54.000 | PEAK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

| | |
|----------------------------|-------------------------------------|
| Site : SITE 2 | Time : 2007/11/16 - 16:07 |
| Limit : FCC_CLASS_B_03M_QP | Margin : 6 |
| EUT : Digital Still Camera | Probe : PRO 06-03-29 ST2 - VERTICAL |
| Power : AC120V / 60Hz | Note : Mode 1: Slide Show |

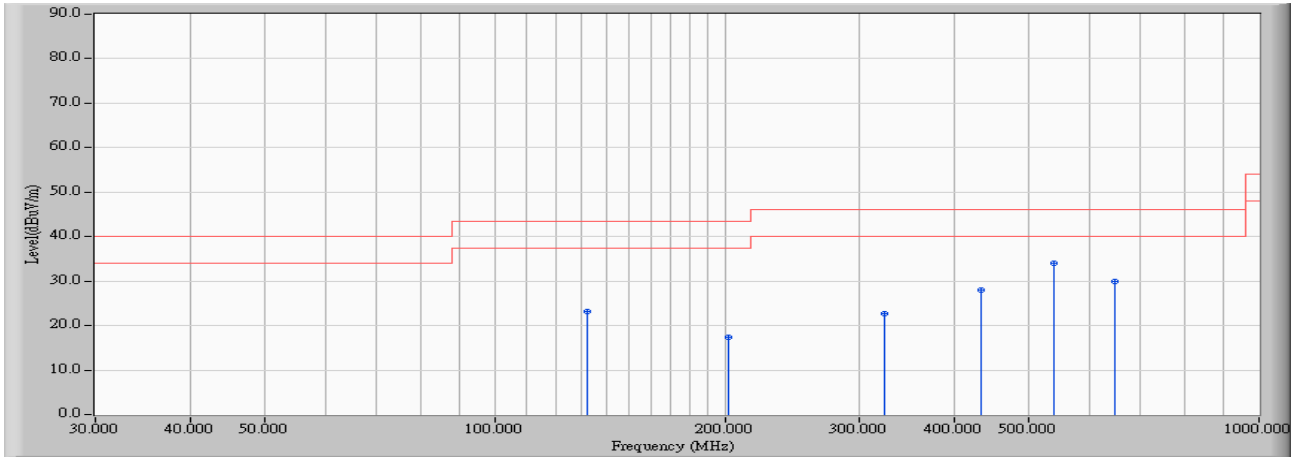


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|---|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | 132.000 | 12.803 | 10.440 | 23.243 | -20.257 | 43.500 | QUASIPeAK |
| 2 | 202.500 | 8.568 | 8.900 | 17.468 | -26.032 | 43.500 | QUASIPeAK |
| 3 | 324.000 | 14.263 | 8.350 | 22.613 | -23.387 | 46.000 | QUASIPeAK |
| 4 | 432.000 | 16.366 | 11.510 | 27.876 | -18.124 | 46.000 | QUASIPeAK |
| 5 | * 540.000 | 22.608 | 11.330 | 33.937 | -12.063 | 46.000 | QUASIPeAK |
| 6 | 648.000 | 22.144 | 7.730 | 29.874 | -16.126 | 46.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|--------------------------------|--|
| Site : Site 2 | Time : 2007/11/23 - 15:04 |
| Limit : FCC_B_(Above_1G)_3M_AV | Margin : 6 |
| EUT : Digital Still Camera | Probe : FCC_RF_1G-18G(2005-3) - VERTICAL |
| Power : AC 120V/60Hz | Note : MODE1:Slide SHOW |

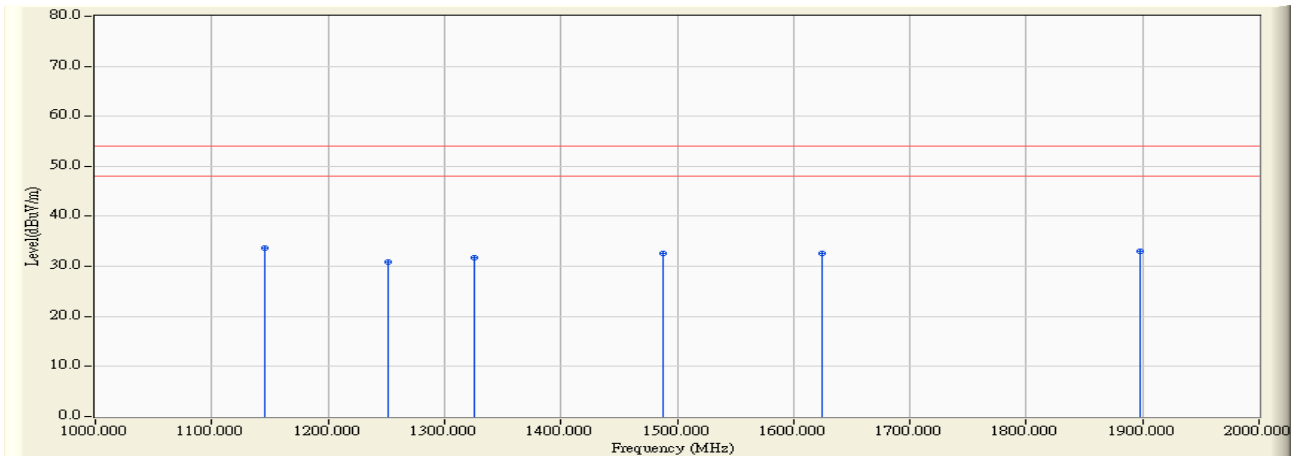


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|---|---|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | * | 1145.060 | -8.526 | 42.220 | 33.694 | -20.306 | 54.000 | PEAK |
| 2 | | 1251.050 | -8.177 | 39.050 | 30.874 | -23.126 | 54.000 | PEAK |
| 3 | | 1325.050 | -7.878 | 39.680 | 31.803 | -22.197 | 54.000 | PEAK |
| 4 | | 1487.290 | -7.370 | 40.050 | 32.680 | -21.320 | 54.000 | PEAK |
| 5 | | 1625.080 | -6.943 | 39.560 | 32.617 | -21.383 | 54.000 | PEAK |
| 6 | | 1898.050 | -5.781 | 38.880 | 33.099 | -20.901 | 54.000 | PEAK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

| | |
|----------------------------|---------------------------------------|
| Site : SITE 2 | Time : 2007/11/16 - 13:36 |
| Limit : FCC_CLASS_B_03M_QP | Margin : 6 |
| EUT : Digital Still Camera | Probe : PRO 06-03-29 ST2 - HORIZONTAL |
| Power : AC120V / 60Hz | Note : Mode 2: REC |

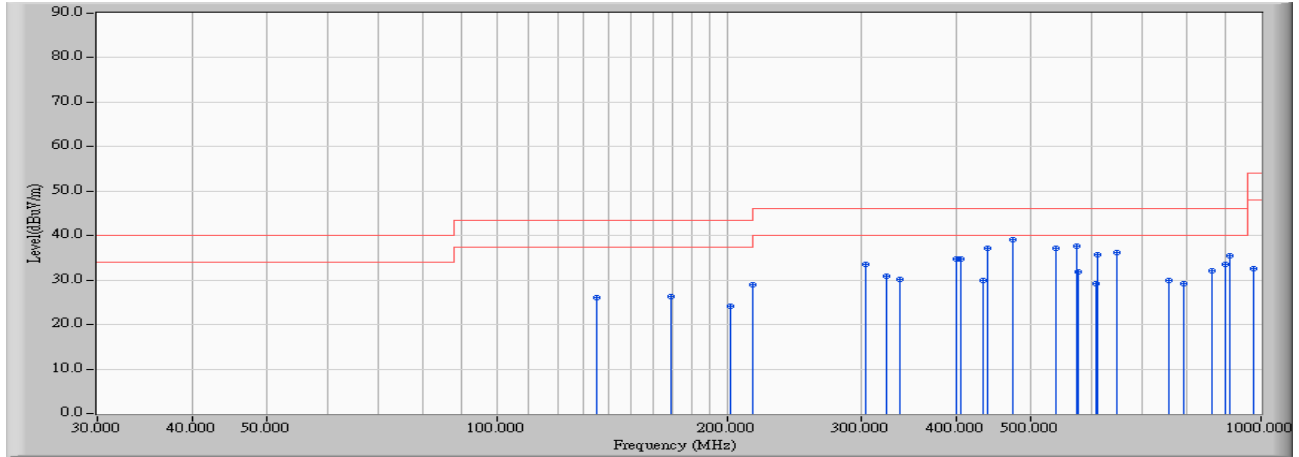


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|----|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | 135.000 | 12.172 | 13.770 | 25.942 | -17.558 | 43.500 | QUASIPeAK |
| 2 | 168.750 | 14.560 | 11.820 | 26.380 | -17.120 | 43.500 | QUASIPeAK |
| 3 | 202.500 | 12.841 | 11.290 | 24.131 | -19.369 | 43.500 | QUASIPeAK |
| 4 | 216.000 | 11.873 | 16.980 | 28.852 | -14.648 | 43.500 | QUASIPeAK |
| 5 | 303.750 | 16.801 | 16.760 | 33.561 | -12.439 | 46.000 | QUASIPeAK |
| 6 | 324.000 | 16.991 | 13.900 | 30.891 | -15.109 | 46.000 | QUASIPeAK |
| 7 | 337.500 | 16.290 | 13.790 | 30.080 | -15.920 | 46.000 | QUASIPeAK |
| 8 | 400.000 | 19.293 | 15.550 | 34.843 | -11.157 | 46.000 | QUASIPeAK |
| 9 | 405.000 | 19.356 | 15.480 | 34.836 | -11.164 | 46.000 | QUASIPeAK |
| 10 | 432.000 | 18.665 | 11.150 | 29.815 | -16.185 | 46.000 | QUASIPeAK |
| 11 | 438.750 | 17.311 | 19.960 | 37.271 | -8.729 | 46.000 | QUASIPeAK |
| 12 | * 472.500 | 19.109 | 20.050 | 39.159 | -6.841 | 46.000 | QUASIPeAK |
| 13 | 540.000 | 20.501 | 16.550 | 37.051 | -8.949 | 46.000 | QUASIPeAK |
| 14 | 573.750 | 20.903 | 16.830 | 37.733 | -8.267 | 46.000 | QUASIPeAK |
| 15 | 576.000 | 20.825 | 11.120 | 31.945 | -14.055 | 46.000 | QUASIPeAK |
| 16 | 607.500 | 21.766 | 7.480 | 29.246 | -16.754 | 46.000 | QUASIPeAK |
| 17 | 612.000 | 22.710 | 13.100 | 35.810 | -10.190 | 46.000 | QUASIPeAK |
| 18 | 648.000 | 24.192 | 12.020 | 36.212 | -9.788 | 46.000 | QUASIPeAK |
| 19 | 756.000 | 23.057 | 6.970 | 30.027 | -15.973 | 46.000 | QUASIPeAK |
| 20 | 792.000 | 22.764 | 6.370 | 29.134 | -16.866 | 46.000 | QUASIPeAK |
| 21 | 864.000 | 24.920 | 7.220 | 32.140 | -13.860 | 46.000 | QUASIPeAK |
| 22 | 900.000 | 26.520 | 6.960 | 33.480 | -12.520 | 46.000 | QUASIPeAK |
| 23 | 911.250 | 26.495 | 8.980 | 35.475 | -10.525 | 46.000 | QUASIPeAK |
| 24 | 978.750 | 27.142 | 5.390 | 32.531 | -21.469 | 54.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|--------------------------------|--|
| Site : Site 2 | Time : 2007/11/23 - 15:10 |
| Limit : FCC_B_(Above_1G)_3M_AV | Margin : 6 |
| EUT : Digital Still Camera | Probe : FCC_RF_1G-18G(2005-3) - HORIZONTAL |
| Power : AC 120V/60Hz | Note : Mode 2: REC |

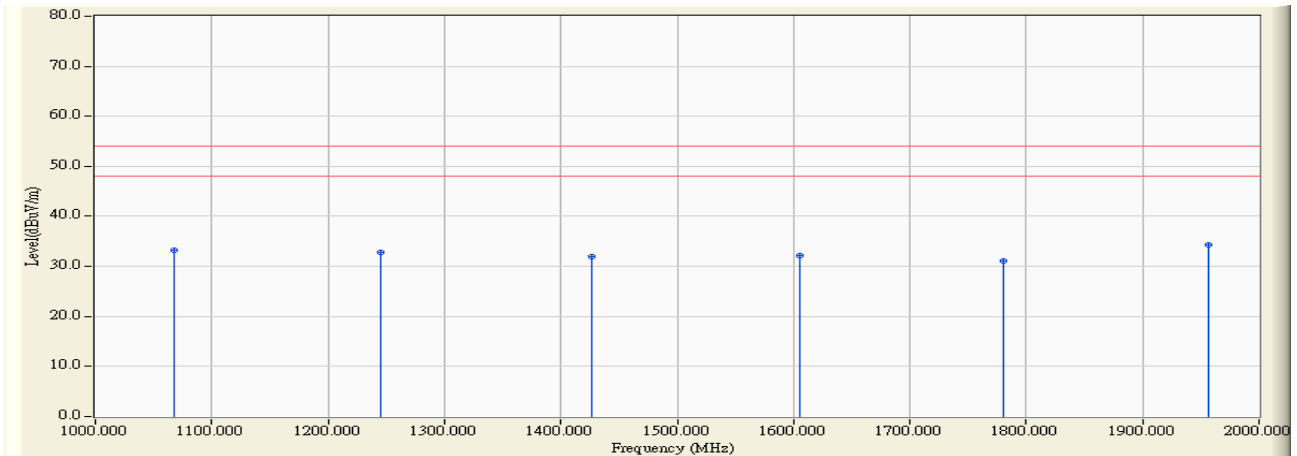


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|---|---|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | | 1068.310 | -9.699 | 43.050 | 33.351 | -20.649 | 54.000 | PEAK |
| 2 | | 1244.630 | -9.052 | 41.950 | 32.898 | -21.102 | 54.000 | PEAK |
| 3 | | 1426.150 | -8.482 | 40.380 | 31.897 | -22.103 | 54.000 | PEAK |
| 4 | | 1605.870 | -7.853 | 40.080 | 32.228 | -21.772 | 54.000 | PEAK |
| 5 | | 1780.050 | -7.053 | 38.080 | 31.027 | -22.973 | 54.000 | PEAK |
| 6 | * | 1956.260 | -4.740 | 39.010 | 34.270 | -19.730 | 54.000 | PEAK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

| | |
|----------------------------|-------------------------------------|
| Site : SITE 2 | Time : 2007/11/16 - 13:21 |
| Limit : FCC_CLASS_B_03M_QP | Margin : 6 |
| EUT : Digital Still Camera | Probe : PRO 06-03-29 ST2 - VERTICAL |
| Power : AC120V / 60Hz | Note : Mode 2: REC |

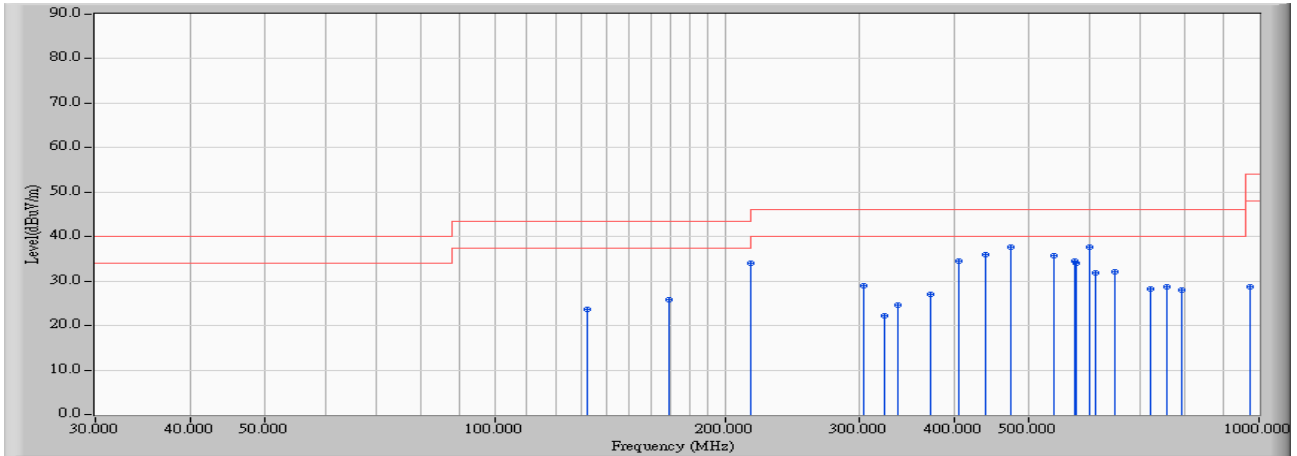


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|----|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | 132.000 | 12.803 | 10.850 | 23.653 | -19.847 | 43.500 | QUASIPeAK |
| 2 | 168.750 | 11.995 | 13.820 | 25.815 | -17.685 | 43.500 | QUASIPeAK |
| 3 | 216.000 | 11.779 | 22.230 | 34.008 | -9.492 | 43.500 | QUASIPeAK |
| 4 | 303.750 | 17.544 | 11.400 | 28.945 | -17.055 | 46.000 | QUASIPeAK |
| 5 | 324.000 | 14.263 | 7.950 | 22.213 | -23.787 | 46.000 | QUASIPeAK |
| 6 | 337.500 | 17.273 | 7.260 | 24.533 | -21.467 | 46.000 | QUASIPeAK |
| 7 | 371.250 | 16.360 | 10.690 | 27.050 | -18.950 | 46.000 | QUASIPeAK |
| 8 | 405.000 | 17.176 | 17.310 | 34.486 | -11.514 | 46.000 | QUASIPeAK |
| 9 | 438.750 | 18.211 | 17.800 | 36.011 | -9.989 | 46.000 | QUASIPeAK |
| 10 | * 472.500 | 19.294 | 18.410 | 37.704 | -8.296 | 46.000 | QUASIPeAK |
| 11 | 540.000 | 22.608 | 13.180 | 35.787 | -10.213 | 46.000 | QUASIPeAK |
| 12 | 573.750 | 21.029 | 13.590 | 34.619 | -11.381 | 46.000 | QUASIPeAK |
| 13 | 576.000 | 21.698 | 12.370 | 34.068 | -11.932 | 46.000 | QUASIPeAK |
| 14 | 600.000 | 21.710 | 15.940 | 37.650 | -8.350 | 46.000 | QUASIPeAK |
| 15 | 612.000 | 21.270 | 10.520 | 31.790 | -14.210 | 46.000 | QUASIPeAK |
| 16 | 648.000 | 22.144 | 9.870 | 32.014 | -13.986 | 46.000 | QUASIPeAK |
| 17 | 720.000 | 22.703 | 5.450 | 28.153 | -17.847 | 46.000 | QUASIPeAK |
| 18 | 756.000 | 21.630 | 7.190 | 28.820 | -17.180 | 46.000 | QUASIPeAK |
| 19 | 792.000 | 21.035 | 6.950 | 27.984 | -18.016 | 46.000 | QUASIPeAK |
| 20 | 972.000 | 26.123 | 2.470 | 28.594 | -25.406 | 54.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|--------------------------------|--|
| Site : Site 2 | Time : 2007/11/23 - 15:14 |
| Limit : FCC_B_(Above_1G)_3M_AV | Margin : 6 |
| EUT : Digital Still Camera | Probe : FCC_RF_1G-18G(2005-3) - VERTICAL |
| Power : AC 120V/60Hz | Note : Mode 2: REC |

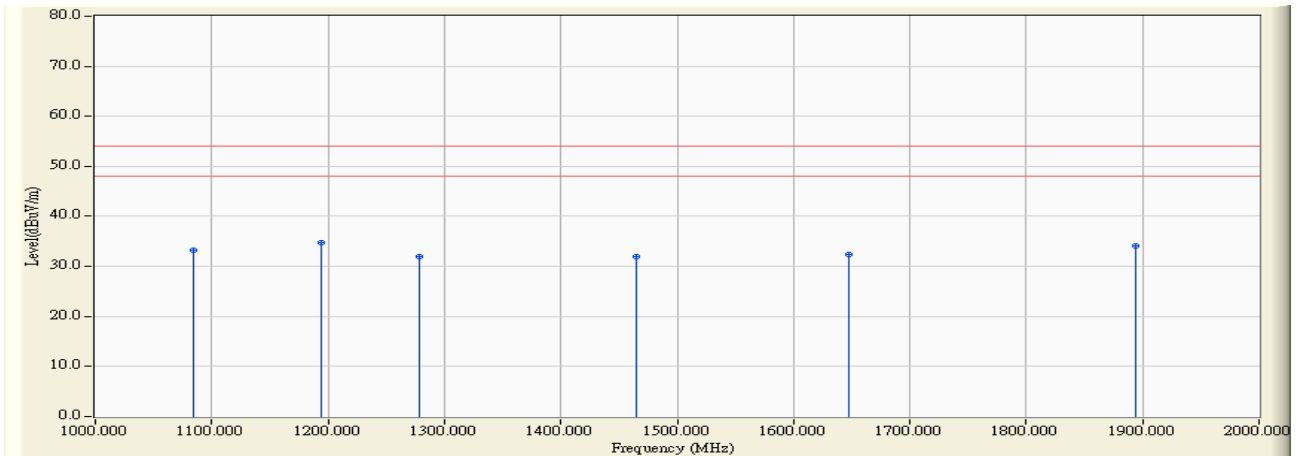


| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|---|---|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | | 1084.050 | -8.843 | 42.080 | 33.237 | -20.763 | 54.000 | PEAK |
| 2 | * | 1194.250 | -8.309 | 43.050 | 34.740 | -19.260 | 54.000 | PEAK |
| 3 | | 1277.840 | -8.185 | 40.090 | 31.905 | -22.095 | 54.000 | PEAK |
| 4 | | 1465.080 | -7.395 | 39.280 | 31.885 | -22.115 | 54.000 | PEAK |
| 5 | | 1648.040 | -6.772 | 39.080 | 32.308 | -21.692 | 54.000 | PEAK |
| 6 | | 1894.050 | -5.931 | 39.980 | 34.048 | -19.952 | 54.000 | PEAK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

| | |
|----------------------------|---------------------------------------|
| Site : SITE 2 | Time : 2007/11/16 - 16:06 |
| Limit : FCC_CLASS_B_03M_QP | Margin : 6 |
| EUT : Digital Still Camera | Probe : PRO 06-03-29 ST2 - HORIZONTAL |
| Power : AC120V / 60Hz | Note : Mode 3: USB (Data Transmit) |

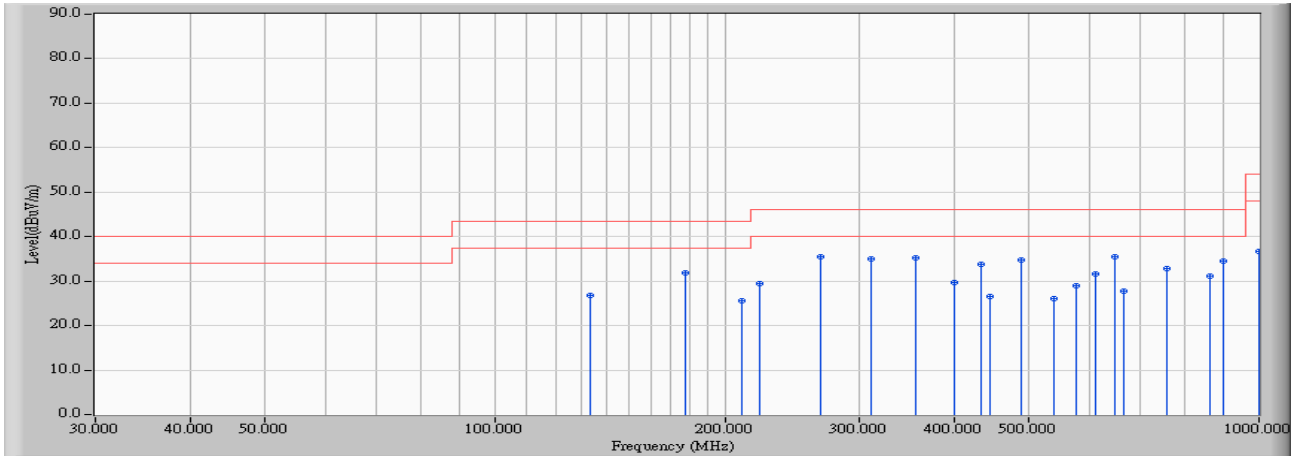


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|----|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | 133.000 | 11.864 | 14.800 | 26.663 | -16.837 | 43.500 | QUASIPeAK |
| 2 | * 177.500 | 10.763 | 21.200 | 31.963 | -11.537 | 43.500 | QUASIPeAK |
| 3 | 210.000 | 11.706 | 13.880 | 25.586 | -17.914 | 43.500 | QUASIPeAK |
| 4 | 222.000 | 11.749 | 17.700 | 29.449 | -16.551 | 46.000 | QUASIPeAK |
| 5 | 266.537 | 15.723 | 19.800 | 35.523 | -10.477 | 46.000 | QUASIPeAK |
| 6 | 311.000 | 15.517 | 19.500 | 35.017 | -10.983 | 46.000 | QUASIPeAK |
| 7 | 355.000 | 17.588 | 17.700 | 35.288 | -10.712 | 46.000 | QUASIPeAK |
| 8 | 400.000 | 19.293 | 10.500 | 29.793 | -16.207 | 46.000 | QUASIPeAK |
| 9 | 432.000 | 18.665 | 15.080 | 33.745 | -12.255 | 46.000 | QUASIPeAK |
| 10 | 444.000 | 17.546 | 9.100 | 26.646 | -19.354 | 46.000 | QUASIPeAK |
| 11 | 488.000 | 20.355 | 14.400 | 34.755 | -11.245 | 46.000 | QUASIPeAK |
| 12 | 540.000 | 20.501 | 5.640 | 26.141 | -19.859 | 46.000 | QUASIPeAK |
| 13 | 576.000 | 20.825 | 8.070 | 28.895 | -17.105 | 46.000 | QUASIPeAK |
| 14 | 612.000 | 22.710 | 9.000 | 31.710 | -14.290 | 46.000 | QUASIPeAK |
| 15 | * 648.000 | 24.192 | 11.380 | 35.572 | -10.428 | 46.000 | QUASIPeAK |
| 16 | 666.000 | 22.874 | 4.800 | 27.674 | -18.326 | 46.000 | QUASIPeAK |
| 17 | 756.000 | 23.057 | 9.850 | 32.907 | -13.093 | 46.000 | QUASIPeAK |
| 18 | 864.000 | 24.920 | 6.100 | 31.020 | -14.980 | 46.000 | QUASIPeAK |
| 19 | 900.000 | 26.520 | 8.100 | 34.620 | -11.380 | 46.000 | QUASIPeAK |
| 20 | 999.000 | 26.846 | 9.810 | 36.656 | -17.344 | 54.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|--------------------------------|--|
| Site : Site 2 | Time : 2007/11/23 - 15:17 |
| Limit : FCC_B_(Above_1G)_3M_AV | Margin : 6 |
| EUT : Digital Still Camera | Probe : FCC_RF_1G-18G(2005-3) - HORIZONTAL |
| Power : AC120V / 60Hz | Note : Mode 3: USB (Data Transmit) |

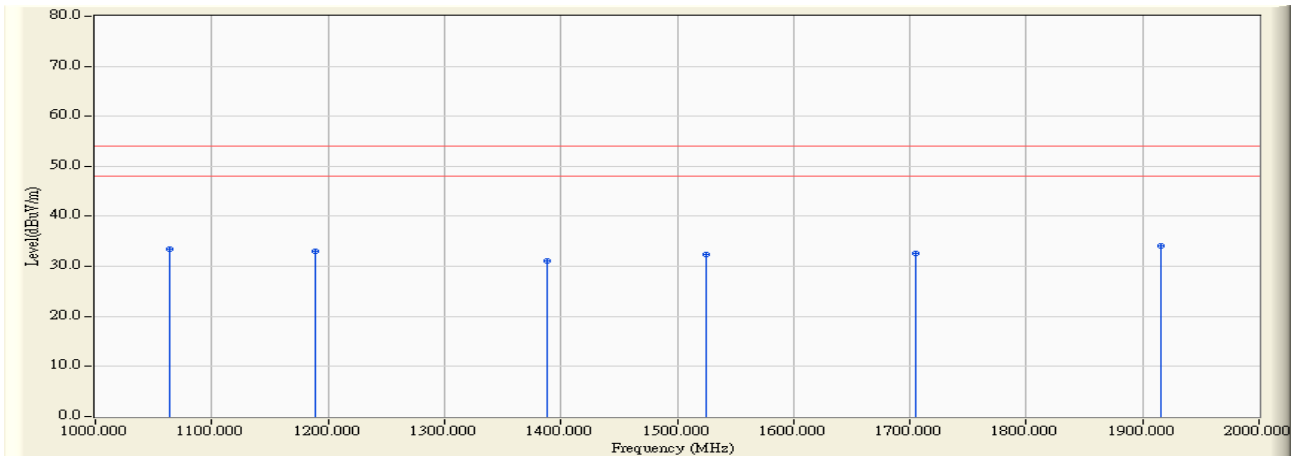


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|---|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | 1064.280 | -9.722 | 43.080 | 33.358 | -20.642 | 54.000 | PEAK |
| 2 | 1189.250 | -9.089 | 42.080 | 32.991 | -21.009 | 54.000 | PEAK |
| 3 | 1388.450 | -8.528 | 39.580 | 31.052 | -22.948 | 54.000 | PEAK |
| 4 | 1524.480 | -7.937 | 40.280 | 32.342 | -21.658 | 54.000 | PEAK |
| 5 | 1705.060 | -7.256 | 39.880 | 32.624 | -21.376 | 54.000 | PEAK |
| 6 | * 1915.360 | -5.067 | 39.150 | 34.083 | -19.917 | 54.000 | PEAK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

| | |
|----------------------------|-------------------------------------|
| Site : SITE 2 | Time : 2007/11/16 - 16:06 |
| Limit : FCC_CLASS_B_03M_QP | Margin : 6 |
| EUT : Digital Still Camera | Probe : PRO 06-03-29 ST2 - VERTICAL |
| Power : AC120V / 60Hz | Note : Mode 3: USB (Data Transmit) |

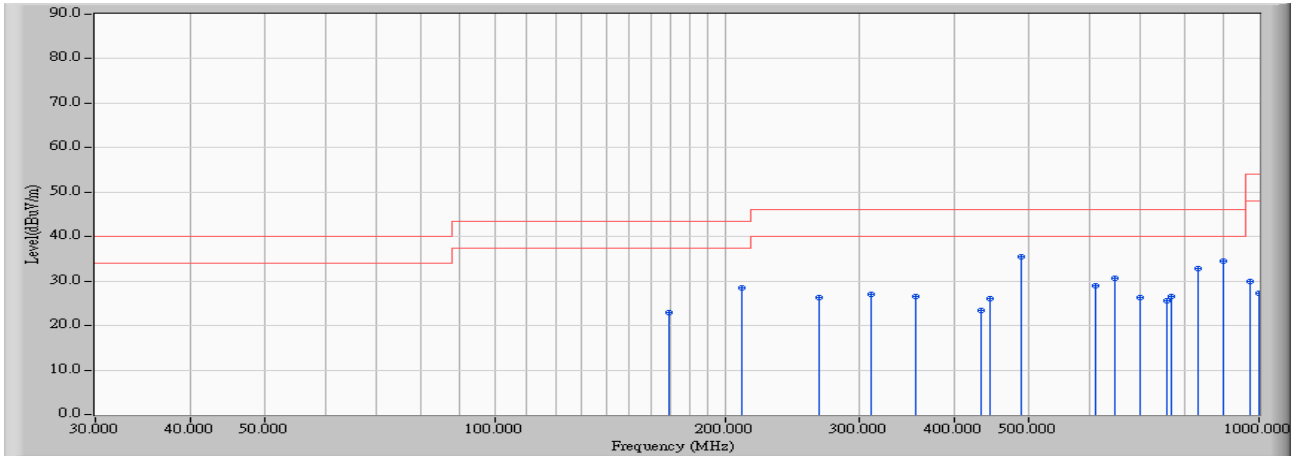


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|----|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | 168.750 | 11.995 | 10.980 | 22.975 | -20.525 | 43.500 | QUASIPeAK |
| 2 | * 210.000 | 11.636 | 16.940 | 28.576 | -14.924 | 43.500 | QUASIPeAK |
| 3 | 266.000 | 19.536 | 6.700 | 26.236 | -19.764 | 46.000 | QUASIPeAK |
| 4 | 311.000 | 17.026 | 10.000 | 27.026 | -18.974 | 46.000 | QUASIPeAK |
| 5 | 355.000 | 18.825 | 7.600 | 26.425 | -19.575 | 46.000 | QUASIPeAK |
| 6 | 432.000 | 16.366 | 6.940 | 23.306 | -22.694 | 46.000 | QUASIPeAK |
| 7 | 444.000 | 18.344 | 7.700 | 26.044 | -19.956 | 46.000 | QUASIPeAK |
| 8 | * 488.000 | 20.514 | 15.000 | 35.514 | -10.486 | 46.000 | QUASIPeAK |
| 9 | 612.000 | 21.270 | 7.800 | 29.070 | -16.930 | 46.000 | QUASIPeAK |
| 10 | 648.000 | 22.144 | 8.510 | 30.654 | -15.346 | 46.000 | QUASIPeAK |
| 11 | 700.000 | 22.648 | 3.580 | 26.228 | -19.772 | 46.000 | QUASIPeAK |
| 12 | 756.013 | 21.629 | 4.030 | 25.659 | -20.341 | 46.000 | QUASIPeAK |
| 13 | 767.888 | 20.907 | 5.650 | 26.557 | -19.443 | 46.000 | QUASIPeAK |
| 14 | 832.000 | 24.876 | 7.910 | 32.786 | -13.214 | 46.000 | QUASIPeAK |
| 15 | 900.000 | 25.318 | 9.280 | 34.598 | -11.402 | 46.000 | QUASIPeAK |
| 16 | 972.000 | 26.123 | 3.730 | 29.854 | -24.146 | 54.000 | QUASIPeAK |
| 17 | 999.000 | 24.630 | 2.610 | 27.240 | -26.760 | 54.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|--------------------------------|--|
| Site : Site 2 | Time : 2007/11/23 - 15:19 |
| Limit : FCC_B_(Above_1G)_3M_AV | Margin : 6 |
| EUT : Digital Still Camera | Probe : FCC_RF_1G-18G(2005-3) - VERTICAL |
| Power : AC120V / 60Hz | Note : Mode 3: USB (Data Transmit) |

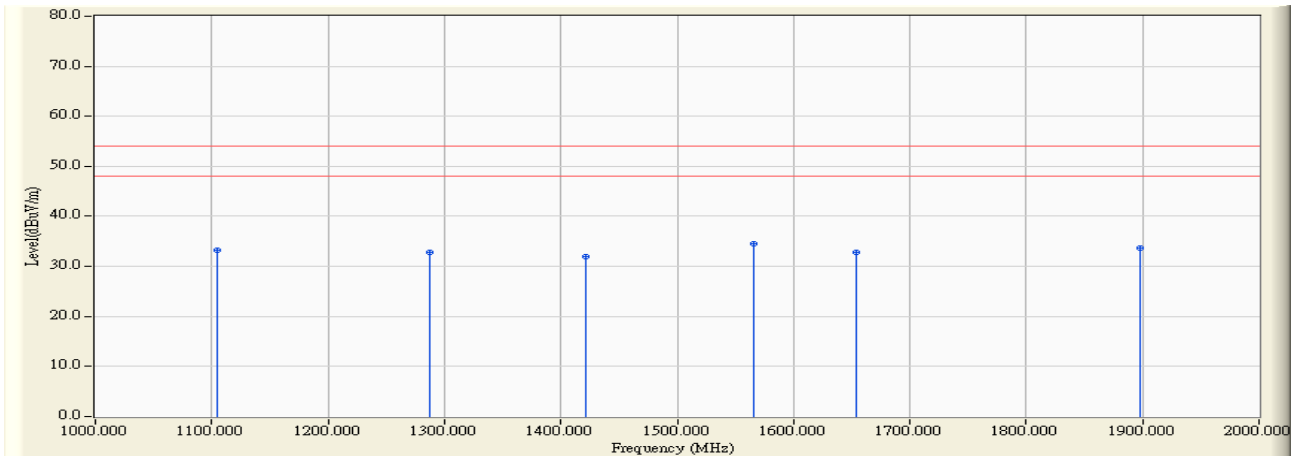


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|---|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | 1105.060 | -8.858 | 42.080 | 33.221 | -20.779 | 54.000 | PEAK |
| 2 | 1286.870 | -8.084 | 40.980 | 32.896 | -21.104 | 54.000 | PEAK |
| 3 | 1421.380 | -7.680 | 39.680 | 32.000 | -22.000 | 54.000 | PEAK |
| 4 | * 1565.220 | -7.128 | 41.560 | 34.432 | -19.568 | 54.000 | PEAK |
| 5 | 1654.380 | -6.809 | 39.640 | 32.831 | -21.169 | 54.000 | PEAK |
| 6 | 1897.260 | -5.811 | 39.560 | 33.749 | -20.251 | 54.000 | PEAK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

| | |
|----------------------------|---------------------------------------|
| Site : SITE 2 | Time : 2007/11/16 - 16:07 |
| Limit : FCC_CLASS_B_03M_QP | Margin : 6 |
| EUT : Digital Still Camera | Probe : PRO 06-03-29 ST2 - HORIZONTAL |
| Power : AC 120V/60Hz | Note : Mode 4: Preview |

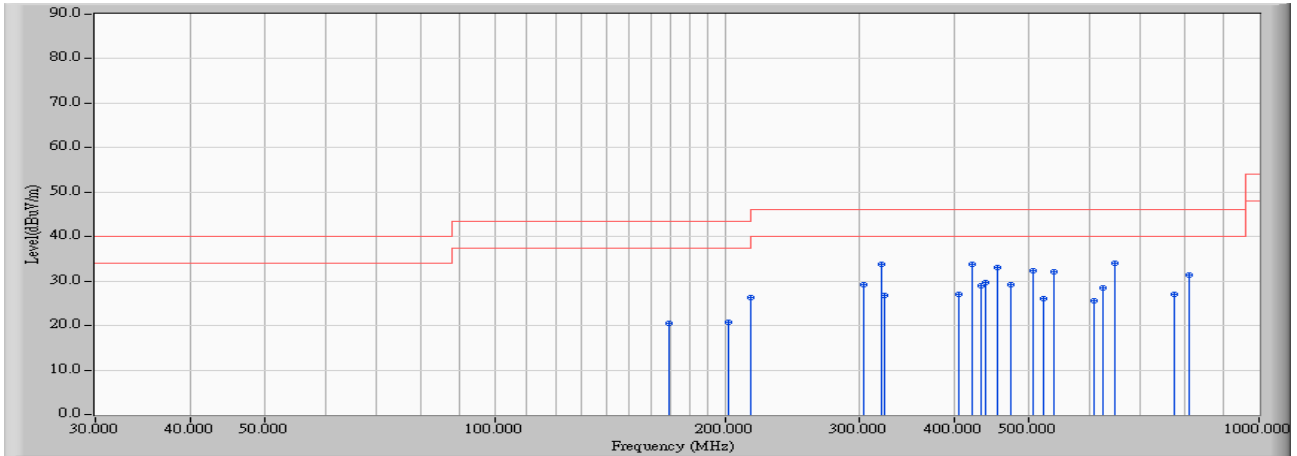


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|----|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | 168.750 | 14.560 | 5.830 | 20.390 | -23.110 | 43.500 | QUASIPeAK |
| 2 | 202.500 | 12.841 | 7.900 | 20.741 | -22.759 | 43.500 | QUASIPeAK |
| 3 | 216.000 | 11.873 | 14.440 | 26.312 | -17.188 | 43.500 | QUASIPeAK |
| 4 | 303.738 | 16.803 | 12.310 | 29.113 | -16.887 | 46.000 | QUASIPeAK |
| 5 | 320.625 | 16.472 | 17.270 | 33.742 | -12.258 | 46.000 | QUASIPeAK |
| 6 | 324.000 | 16.991 | 9.690 | 26.681 | -19.319 | 46.000 | QUASIPeAK |
| 7 | 405.000 | 19.356 | 7.720 | 27.076 | -18.924 | 46.000 | QUASIPeAK |
| 8 | 421.875 | 18.799 | 15.030 | 33.829 | -12.171 | 46.000 | QUASIPeAK |
| 9 | 432.000 | 18.665 | 10.360 | 29.025 | -16.975 | 46.000 | QUASIPeAK |
| 10 | 438.750 | 17.311 | 12.440 | 29.751 | -16.249 | 46.000 | QUASIPeAK |
| 11 | 455.625 | 17.907 | 15.190 | 33.097 | -12.903 | 46.000 | QUASIPeAK |
| 12 | 472.500 | 19.109 | 10.070 | 29.179 | -16.821 | 46.000 | QUASIPeAK |
| 13 | 506.250 | 21.231 | 11.040 | 32.271 | -13.729 | 46.000 | QUASIPeAK |
| 14 | 523.125 | 19.630 | 6.320 | 25.950 | -20.050 | 46.000 | QUASIPeAK |
| 15 | 540.000 | 20.501 | 11.590 | 32.091 | -13.909 | 46.000 | QUASIPeAK |
| 16 | 607.500 | 21.766 | 3.840 | 25.606 | -20.394 | 46.000 | QUASIPeAK |
| 17 | 624.375 | 23.739 | 4.850 | 28.589 | -17.411 | 46.000 | QUASIPeAK |
| 18 | * 648.000 | 24.192 | 9.890 | 34.082 | -11.918 | 46.000 | QUASIPeAK |
| 19 | 776.250 | 23.217 | 3.760 | 26.977 | -19.023 | 46.000 | QUASIPeAK |
| 20 | 810.000 | 23.696 | 7.770 | 31.466 | -14.534 | 46.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|--------------------------------|--|
| Site : Site 2 | Time : 2007/11/23 - 15:22 |
| Limit : FCC_B_(Above_1G)_3M_AV | Margin : 6 |
| EUT : Digital Still Camera | Probe : FCC_RF_1G-18G(2005-3) - HORIZONTAL |
| Power : AC 120V/60Hz | Note : Mode 4 : Preview |

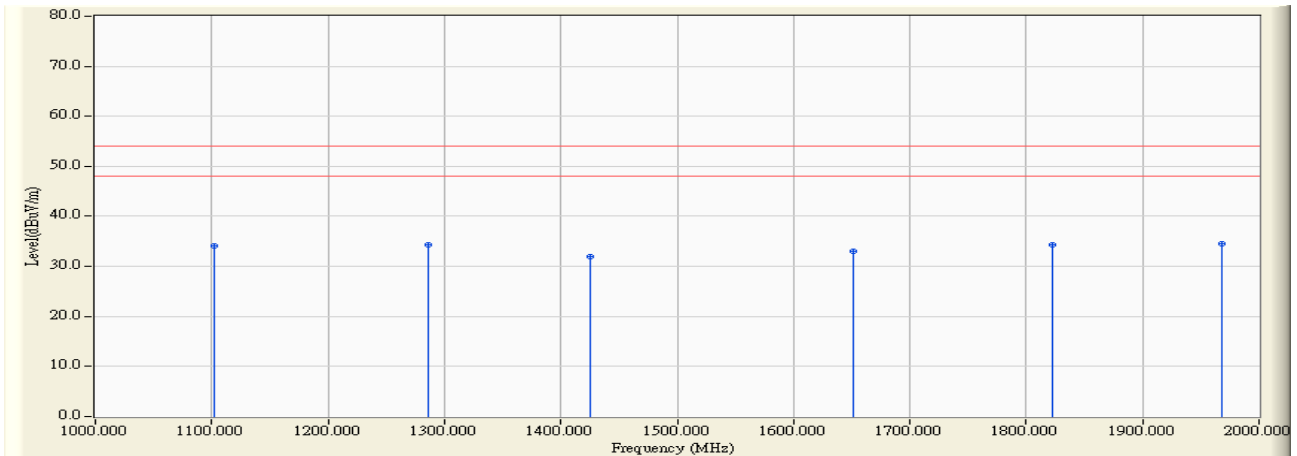


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|---|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | 1102.230 | -9.697 | 43.860 | 34.163 | -19.837 | 54.000 | PEAK |
| 2 | 1286.280 | -8.890 | 43.210 | 34.320 | -19.680 | 54.000 | PEAK |
| 3 | 1425.120 | -8.480 | 40.530 | 32.050 | -21.950 | 54.000 | PEAK |
| 4 | 1651.260 | -7.591 | 40.680 | 33.089 | -20.911 | 54.000 | PEAK |
| 5 | 1822.640 | -6.646 | 40.890 | 34.244 | -19.756 | 54.000 | PEAK |
| 6 | * 1968.280 | -4.655 | 39.080 | 34.425 | -19.575 | 54.000 | PEAK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

| | |
|----------------------------|-------------------------------------|
| Site : SITE 2 | Time : 2007/11/16 - 16:07 |
| Limit : FCC_CLASS_B_03M_QP | Margin : 6 |
| EUT : Digital Still Camera | Probe : PRO 06-03-29 ST2 - VERTICAL |
| Power : AC 120V/60Hz | Note : Mode 4: Preview |

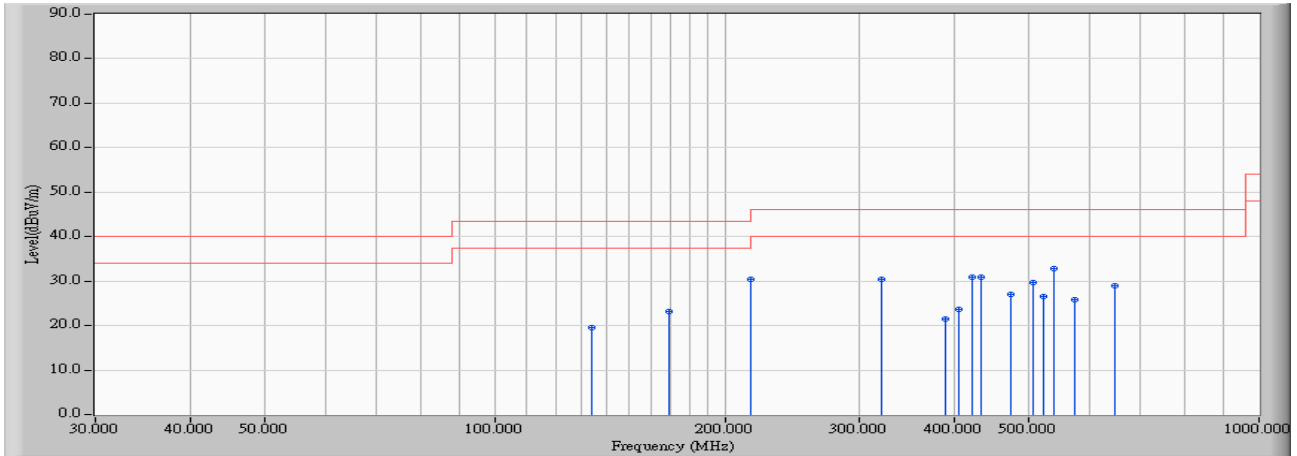


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|----|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | 134.000 | 12.592 | 6.950 | 19.543 | -23.957 | 43.500 | QUASIPeAK |
| 2 | 168.750 | 11.995 | 11.220 | 23.215 | -20.285 | 43.500 | QUASIPeAK |
| 3 | * 216.000 | 11.779 | 18.700 | 30.478 | -13.022 | 43.500 | QUASIPeAK |
| 4 | 320.625 | 15.475 | 14.880 | 30.355 | -15.645 | 46.000 | QUASIPeAK |
| 5 | 388.125 | 16.888 | 4.670 | 21.558 | -24.442 | 46.000 | QUASIPeAK |
| 6 | 405.000 | 17.176 | 6.380 | 23.556 | -22.444 | 46.000 | QUASIPeAK |
| 7 | 421.875 | 18.073 | 12.710 | 30.783 | -15.217 | 46.000 | QUASIPeAK |
| 8 | 432.000 | 16.366 | 14.490 | 30.856 | -15.144 | 46.000 | QUASIPeAK |
| 9 | 472.500 | 19.294 | 7.830 | 27.124 | -18.876 | 46.000 | QUASIPeAK |
| 10 | 506.250 | 20.289 | 9.350 | 29.639 | -16.361 | 46.000 | QUASIPeAK |
| 11 | 523.125 | 20.485 | 5.980 | 26.465 | -19.535 | 46.000 | QUASIPeAK |
| 12 | 540.000 | 22.608 | 10.320 | 32.927 | -13.073 | 46.000 | QUASIPeAK |
| 13 | 573.750 | 21.029 | 4.720 | 25.749 | -20.251 | 46.000 | QUASIPeAK |
| 14 | 648.000 | 22.144 | 6.770 | 28.914 | -17.086 | 46.000 | QUASIPeAK |

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|--------------------------------|--|
| Site : Site 2 | Time : 2007/11/23 - 15:25 |
| Limit : FCC_B_(Above_1G)_3M_AV | Margin : 6 |
| EUT : Digital Still Camera | Probe : FCC_RF_1G-18G(2005-3) - VERTICAL |
| Power : AC 120V/60Hz | Note : Mode 4 : Preview |

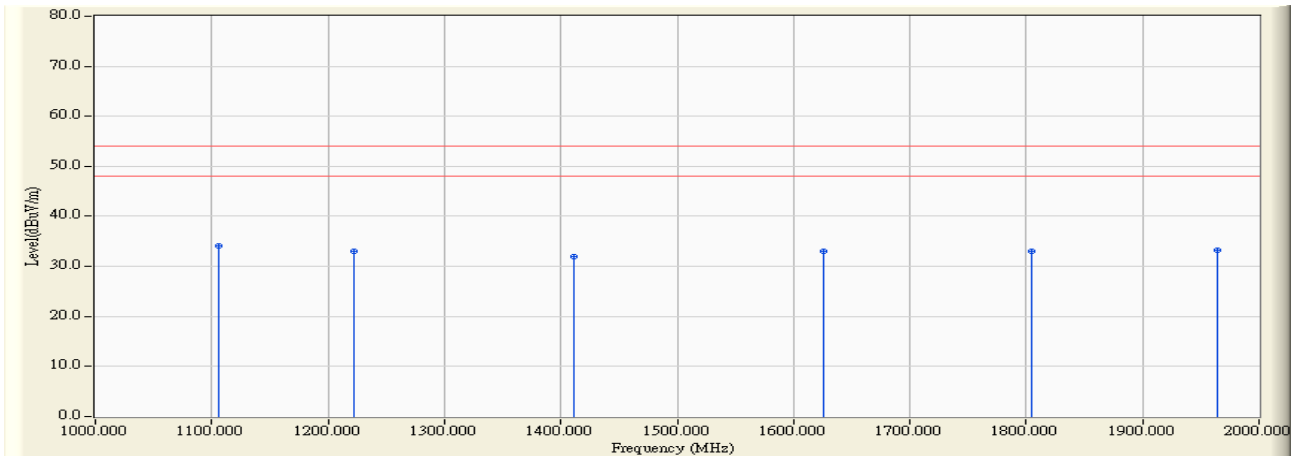

| | | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Detector Type |
|---|---|-----------------|---------------------|----------------------|------------------------|-------------|----------------|---------------|
| 1 | * | 1105.610 | -8.851 | 42.950 | 34.099 | -19.901 | 54.000 | PEAK |
| 2 | | 1222.670 | -8.628 | 41.640 | 33.012 | -20.988 | 54.000 | PEAK |
| 3 | | 1411.260 | -7.680 | 39.680 | 32.000 | -22.000 | 54.000 | PEAK |
| 4 | | 1625.310 | -6.942 | 39.970 | 33.028 | -20.972 | 54.000 | PEAK |
| 5 | | 1805.060 | -6.036 | 39.050 | 33.014 | -20.986 | 54.000 | PEAK |
| 6 | | 1964.840 | -5.843 | 39.040 | 33.197 | -20.803 | 54.000 | PEAK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.