

FCC Part 15 Subpart D Test Report of

E.U.T. : DECT phone(Base Station FP)
MODEL : Gigaset A495, Gigaset A490
FCC ID. : TVUA495

for

APPLICANT : Gigaset Communications GmbH
ADDRESS : Frankenstr. 2 GC QM PR CRA

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 34. LIN 5. DINGFU TSUEN, LINKOU SHIANG
TAIPEI COUNTY, TAIWAN, 24442, R.O.C.

TEL : (02)26023052 FAX: (02)26010910

http : // www.etc.org.tw; e-mail : emc@etc.org.tw

Report Number : 09-11-RBF-043-01

TEST REPORT CERTIFICATION

Applicant : Gigaset Communications GmbH
Frankenstr. 2 GC QM PR CRA

Manufacturer : Huiyang CCT Telecommunications Products Co. Ltd.
CCT Technology Park, San He Economic Developmental Zone,
Huiyang District, Huizhou City, Guangdong Province, PRC

Description of EUT


- a) Type of EUT : DECT phone(Base Station FP)
- b) Trade Name : Gigaset
- c) Model No. : Gigaset A495, Gigaset A490
- d) Power Supply : Adaptor :AC120V 60Hz 0.2A, DC 6V, 500Ma or 0-0.58A
: Battery:1.2V, 650mAh
- e) Frequency Range : 1921.540-1928.450MHz


Regulation Applied : FCC Rules and Regulations Part 15 Subpart D (2008)

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.17-2006/ ANSI C63.4-2003, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Issued Date : Nov. 24, 2009

Test Engineer : 
(Falcon Shi, Engineer)

Check By : 
(Charles Wang, Supervisor)


Approve & Authorized Signer : 
Will Yauo, Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN

Table of Contents	Page
1 GENERAL INFORMATION	1
1.1 Testing Laboratory	1
1.2 Client Information	1
1.3 Manufacturer	1
2 TEST INFORMATION	2
2.1 Descriptino of Tested Device(s)	2
2.2 Test Environment	2
3 TEST REPORT SUMMARY.....	3
3.1 Test Summary	3
3.2 Devices for Tested System.....	3
4 TEST SETUP.....	4
4.1 Frequency and Timing Measurements	4
4.2 Conducted Emission Tests	4
4.3 Radiated Emission Tests	5
4.4 Power Line Conducted Tests	5
5 TEST EQUIPMENT LIST.....	6
6 TEST RESULT.....	7
6.1 Corrdination with fixed microwave	7
6.2 Cross Reference	8
6.3 Labeling Requirements	9
6.4 Power Line Conducted Emissions	10
6.5 Antenna Requirement.....	31
6.6 digital Modulation Techniques	31
6.7 Peak Power Output.....	32
6.8 Power Spectral Density	35
6.9 Antenna Gain	38
6.10 Automatic discontinuation of transmission.....	38
6.11 Safety exposure levels.....	39
6.12 Emission Bandwidth B.....	40
6.13 Emissions inside and outside the subband	43
6.14 Frame period and jitter	62
6.15 Carrier frequency stability	66

1 GENERAL INFORMATION

1.1 Testing Laboratory

Name : Electronics Testing Center, Taiwan
Address : No. 34, Lin 5, Dingfu Tsuen, Linkou Shiang, Taipei County,
Taiwan, 24442, R.O.C.
Telephone : 886-2-26023052
Fax : 886-2-26010910
NVLAP lab registration# : 200133-0
IC OATS registration# : 2949A-1

1.2 Client Information

Name : Gigaset Communications GmbH
Address : Frankenstr. 2 GC QM PR CRA
Telephone : +49(2871)91-2857
Contact person : Uwe Alt

1.3 Manufacturer

Name : Huiyang CCT Telecommunications Products Co. Ltd.
Address : CCT Technology Park, San He Economic Developmental
Zone, Huiyang District, Huizhou City, Guangdong Province,
PRC

2 TEST INFORMATION

2.1 Descriptino of Tested Device(s)

The tested equipment is a DECT base station which complies with ETSI EN 300175. The frequencies have been reprogrammed to comply with the FCC requirements to an Isochronous UPCS device after FCC Part 15D.

The EUT is a responding device as described in ANSI C63.17 and is designed to operate together with a DECT handset, which is then the initiating device.

Frequency Channel	Frequency	Test Frequency
CH4	1928.448 MHz	F _L
CH3	1926.720 MHz	-
CH2	1924.992 MHz	-
CH1	1923.264 MHz	-
CH0	1921.536 MHz	F _H

2.2 Test Environment

Normal test condition

Temperature:	20 – 25 °C
Relative humidty:	55 – 75%

Extreme test condition (declared by manufacture)

Please see the manufacturer declaration form.

3 TEST REPORT SUMMARY

3.1 Test Summary

Requirement	FCC Paragraph #	Required	Customer Declaration	Test Pass
Coordination with fixed microwave	15.307(b)	■	■	<input type="checkbox"/>
Cross Reference	15.309(b)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Labeling requirements	15.311 15.19(a)(3)	■	■	<input type="checkbox"/>
Power line Conducted Emission	15.315 , 15.207	■	<input type="checkbox"/>	■
Antenna Requirement	15.317, 15.203	■	■	<input type="checkbox"/>
Digital Modulation Techniques	15.319(b)	■	■	<input type="checkbox"/>
Peak transmit Power	15.319(c)	■	<input type="checkbox"/>	■
Power spectral Density	15.319(d)	■	<input type="checkbox"/>	■
Antenna gain	15.319(e)	■	■	<input type="checkbox"/>
Automatic discontinuation of transmission	15.319(f)	■	■	<input type="checkbox"/>
Safety exposure levels	15.319(i)	■	<input type="checkbox"/>	■
Emission Bandwidth	15.323(a)	■	<input type="checkbox"/>	■
Emissions inside and outside the subband	15.323(d)	■	<input type="checkbox"/>	■
Frame period and jitter	15.323(e)	■	<input type="checkbox"/>	■
Carrier frequency stability	15.323(f)	■	<input type="checkbox"/>	■

3.2 Devices for Tested System


All measurements are traceable to national standards.

The tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC CFR47 Part 15, Paragraph 15.232 for Isochronous UPCS Devices and Industry Canada RSS-213 Issue 2.

The conducted test methods have been in accordance with ANSI C63.17-2006 Draft where applicable. Radiated tests were conducted in accordance with ANSI C63.4-2003.

4 TEST SETUP


4.1 Frequency and Timing Measurements

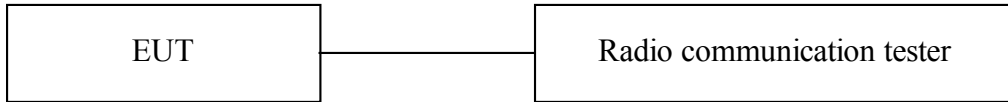

Test Set-up 1

This setup is used for measuring Frame stability, Jitter, Carrier frequency stability at normal and extremet temperatures.


4.2 Conducted Emission Tests

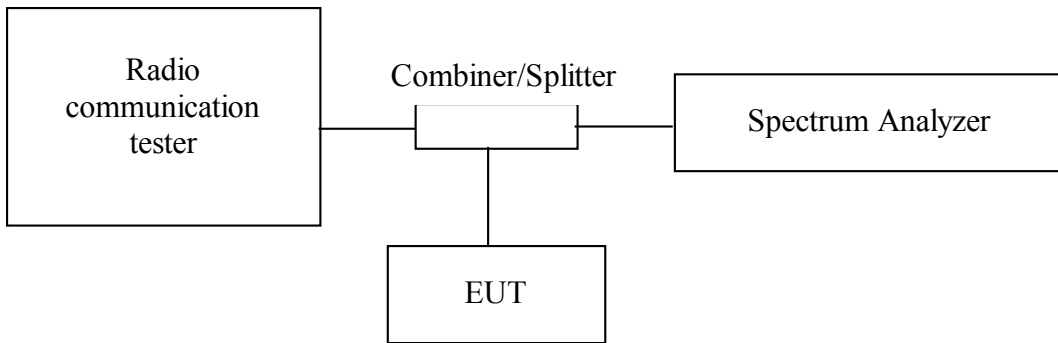

Test Set-up 2

This setup is used for all conducted emission tests.


4.3 Radiated Emission Tests

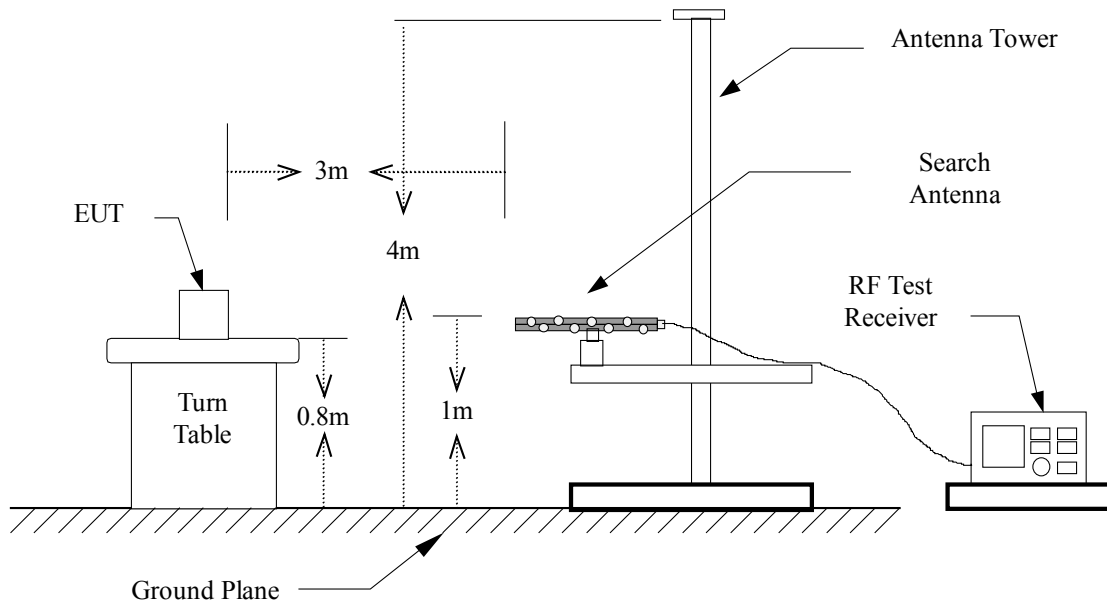

Test Set-up 3

This test setup is used for all radiated emissions tests. For frequencies below 30 MHz the measuring distance is 10 m, for all toher frequencies it is 3m. Emissions above 1 GHz were measured with the Spectrum Analyzer, Horn Antenna and the preamplifier after the antenna.

4.4 Power Line Conducted Tests

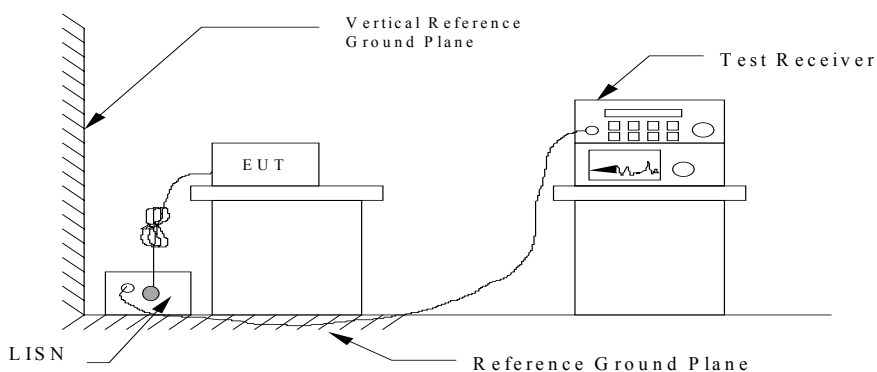

Test Set-up 4

5 TEST EQUIPMENT LIST

To facilitate inclusion on each page of the test equipment used for related test, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.

Equipment	Manufacturer	Model No.	Next Cal. Due
Test Receiver	Rohde & Schwarz	ESCS 30	2010/01/25
Amplifier	HP	8447D	2010/05/07
Bi-Log Antenna	Schaffner	CBL 6111C	2010/05/06
Log-periodic Antenna	EMCO	3146	2010/09/10
Biconical Antenna	EMCO	3110	2010/09/10
EMI Test Receiver	Rohde & Schwarz	ESCI	2009/12/26
Spectrum	R&S	FSP3	2009/12/26
Signal generator	HP	8656B	2009/12/12
Double Ridged Antenna	EMCO	3115	2010/05/12
Amplifier	HP	8449B	2009/12/05
Amplifier	HP	83051A	2010/05/11
Spectrum	R&S	FSP40	2010/09/09
CTS60 DIGITAL RADIO TEST	R&S	CTS60	2009/12/25
Line Impedance Stabilization network	EMCO	3850/2	2010/05/07
Line Impedance Stabilization network	Rohde & Schwarz	ESH2-Z5	2010/07/15
Monitor	IBM	E54	N.C.R.
Printer	HP	LaserJet 1000	N.C.R.
Shielded Room	Riken	----	N.C.R.
Computer	Acer	Veriton	N.C.R.

6 TEST RESULT

6.1 Corrdination with fixed microwave

6.1.1 Standard Applicable

FCC 15.307 (b)

Each application for certification of equipment operating under the provisions of this Subpart must be accompanied by an affidavit from UTAM, Inc. certifying that the applicant is a participating member of UTAM, Inc. In the event a grantee fails to fulfill the obligations attendant to participation in UTAM, Inc., the Commission may invoke administrative sanctions as necessary to preclude continued marketing and installation of devices covered by the grant of certification, including but not limited to revoking certification.

Result

The affidavit from UTAM, Inc. is included in the documentation supplied by the applicant:

Yes

No

6.2 Cross Reference

6.2.1 Standard Applicable

15.309(b)

The requirements of Subpart D apply only to the radio transmitter contained in the PCS device. Other aspects of the operation of a PCS device may be subject to requirements contained else where in this Chapter. In particular, a PCS device that includes digital circuitry not direct associated with the radio transmitter also is subject to the requirements for unintentional radiators in Subpart B.

15.109(a)

For unintentional device, according to FCC §15.109(a), the field strength of radiated emissions from unintentional except for class A digital device radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated μ V/m	Radiated dB μ V/m
30 - 88	3	100	40.0
88 - 216	3	150	43.5
216 - 960	3	200	46.0
Above 960	3	500	54.0

6.2.2 Test Results

This requirement is not applicable because test sample do not included digital circuitry which is not direct associated with the radio transmitter	<input checked="" type="checkbox"/>
For test results according to FCC 15 subpart B, see the EMC report as attached	<input type="checkbox"/>
For test results according to FCC 15 subpart B, see the measurement data as follow	<input type="checkbox"/>
This requirement is covered b results of power line conducted emission test according to FCC 15.315	<input type="checkbox"/>

6.3 Labeling Requirements

6.3.1 Standard Applicable

FCC 15.19

The FCC Identifier shall be displayed on the label, and the device(s) shall bear the following statement in a conspicuous location on the device or in the user manual if the device is too small:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label itself shall be of a permanent type, not a paper label, and shall last the lifetime of the equipments.

6.3.2 Result

See separate documents showing the label design and the placement of the label on the EUT.

6.4 Power Line Conducted Emissions

6.4.1 Standard Applicable

15.315

An unlicensed PCS device that is designed to be connected to the public utility (AC) power line must meet the limits specified in Section 15.207.

15.207(a)

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreases with the logarithm of the frequency

6.4.2 Measurement procedure

ANSI C63.4-2003 using 50 μ H/50 ohms LISN.

6.4.3 Test Results: Complies

Measurement Data: See attached graph, (Peak detector)

Highest measured value (L1 and L2):

All emissions were below the QP and Average limits when measured with Peak detector.

Model No.: A490 / Adaptor 1Operation Mode : Base On LineNeutralTest Date : Nov. 22, 2009Temperature : 20 °CHumidity : 72 %

Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.154	37.5	----	0.4	37.9	----	65.8	55.8	-27.9	----
0.224	30.7	----	0.4	31.1	----	62.7	52.7	-31.6	----
0.267	29.1	----	0.4	29.5	----	61.2	51.2	-31.7	----
0.345	25.2	----	0.4	25.6	----	59.1	49.1	-33.5	----
4.130	24.2	----	0.5	24.7	----	56.0	46.0	-31.3	----
4.279	22.9	----	0.5	23.4	----	56.0	46.0	-32.6	----

Operation Mode : Base On LineLine


Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.193	34.6	----	0.3	34.9	----	63.9	53.9	-29.0	----
0.330	33.1	----	0.3	33.4	----	59.5	49.5	-26.1	----
3.670	27.3	----	0.5	27.8	----	56.0	46.0	-28.2	----
3.861	29.2	----	0.5	29.7	----	56.0	46.0	-26.3	----
4.134	30.5	----	0.5	31.0	----	56.0	46.0	-25.0	----
4.412	30.1	----	0.5	30.6	----	56.0	46.0	-25.4	----

Note :

1. “***” means the value was too low to be measured.
2. If the data table appeared symbol of “----“ means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.


Mode: Base On Line

Neutral

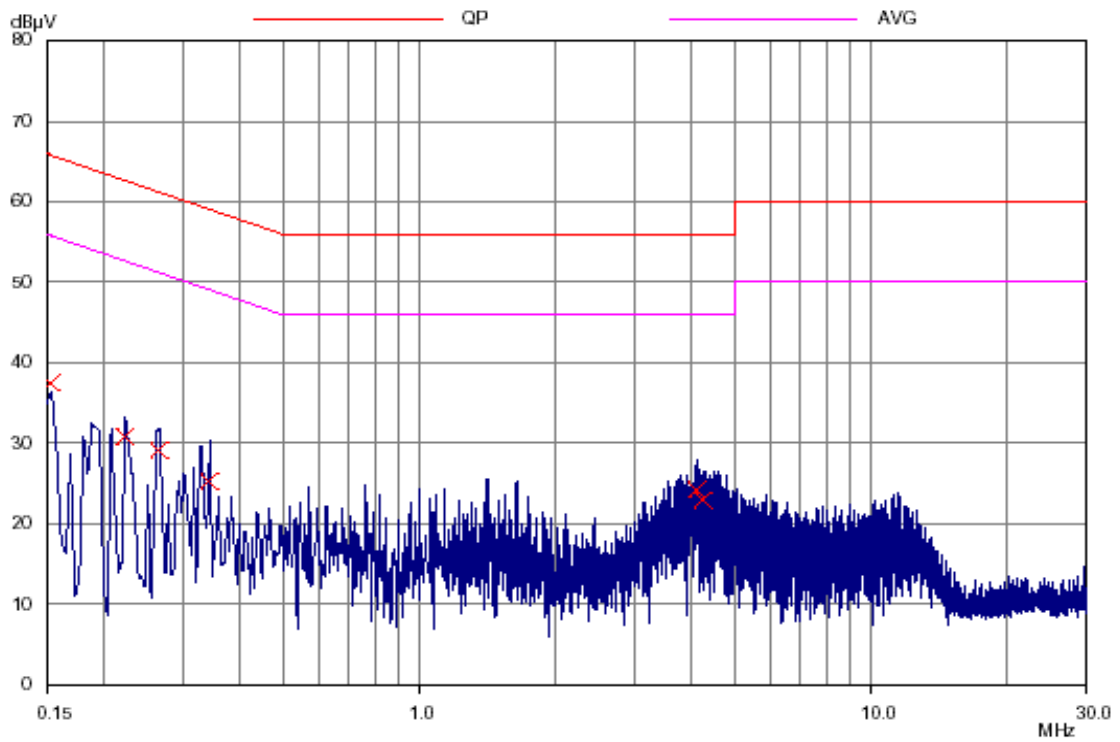

Mode: Base On Line

Line

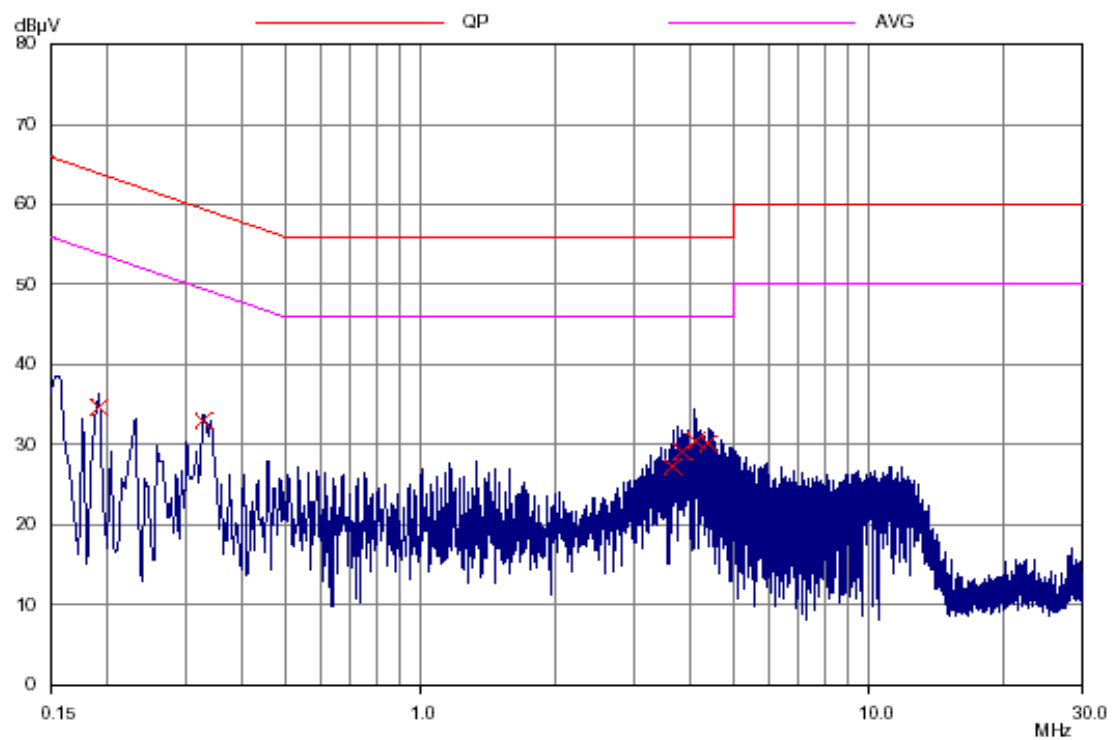

Model No.: A490 / Adaptor 1Operation Mode : Base ChargingNeutralTest Date : Nov. 22, 2009Temperature : 20 °CHumidity : 72 %

Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.615	28.9	----	0.4	29.3	----	56.0	46.0	-26.7	----
0.670	29.5	----	0.4	29.9	----	56.0	46.0	-26.1	----
0.720	28.5	----	0.4	28.9	----	56.0	46.0	-27.1	----
0.775	29.1	----	0.4	29.5	----	56.0	46.0	-26.5	----
0.802	28.9	----	0.4	29.3	----	56.0	46.0	-26.7	----
0.884	27.7	----	0.4	28.1	----	56.0	46.0	-27.9	----

Operation Mode : Base ChargingLine


Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.763	33.7	----	0.4	34.1	----	56.0	46.0	-21.9	----
0.818	35.3	----	0.4	35.7	----	56.0	46.0	-20.3	----
0.873	32.3	----	0.4	32.7	----	56.0	46.0	-23.3	----
3.869	33.9	----	0.5	34.4	----	56.0	46.0	-21.6	----
4.064	34.2	----	0.5	34.7	----	56.0	46.0	-21.3	----
4.119	34.4	----	0.5	34.9	----	56.0	46.0	-21.1	----

Note :

1. “***” means the value was too low to be measured.
2. If the data table appeared symbol of “----“ means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.


Mode: Base Charging

Neutral

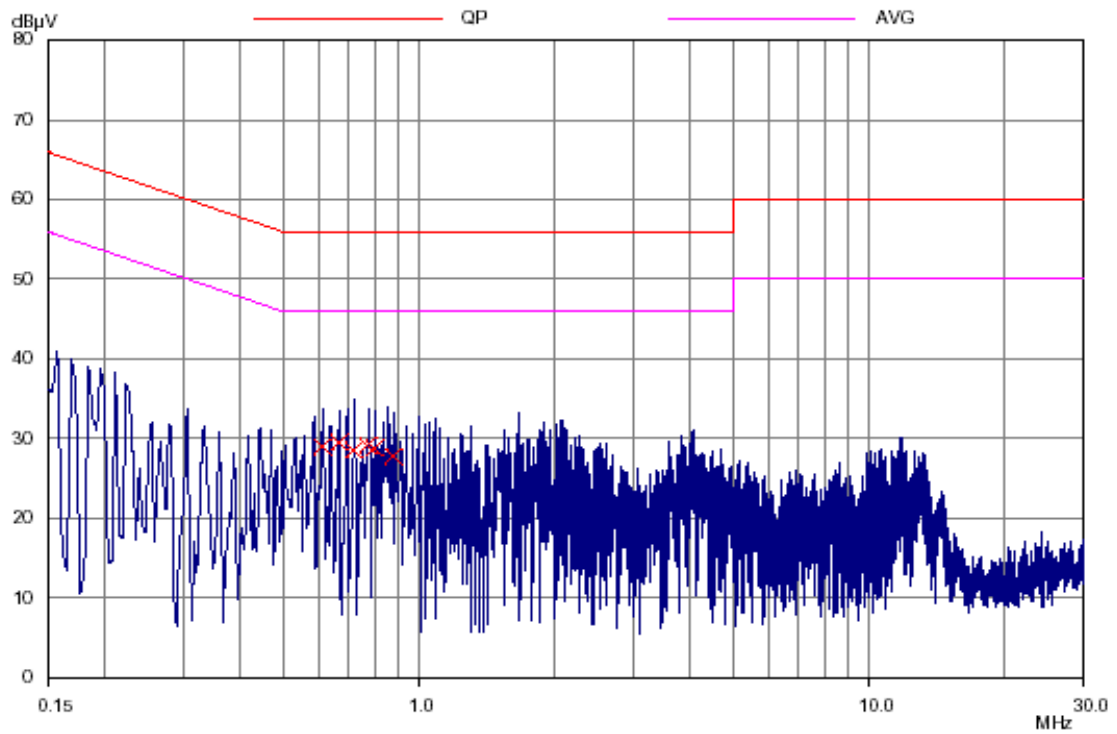

Mode: Base Charging

Line

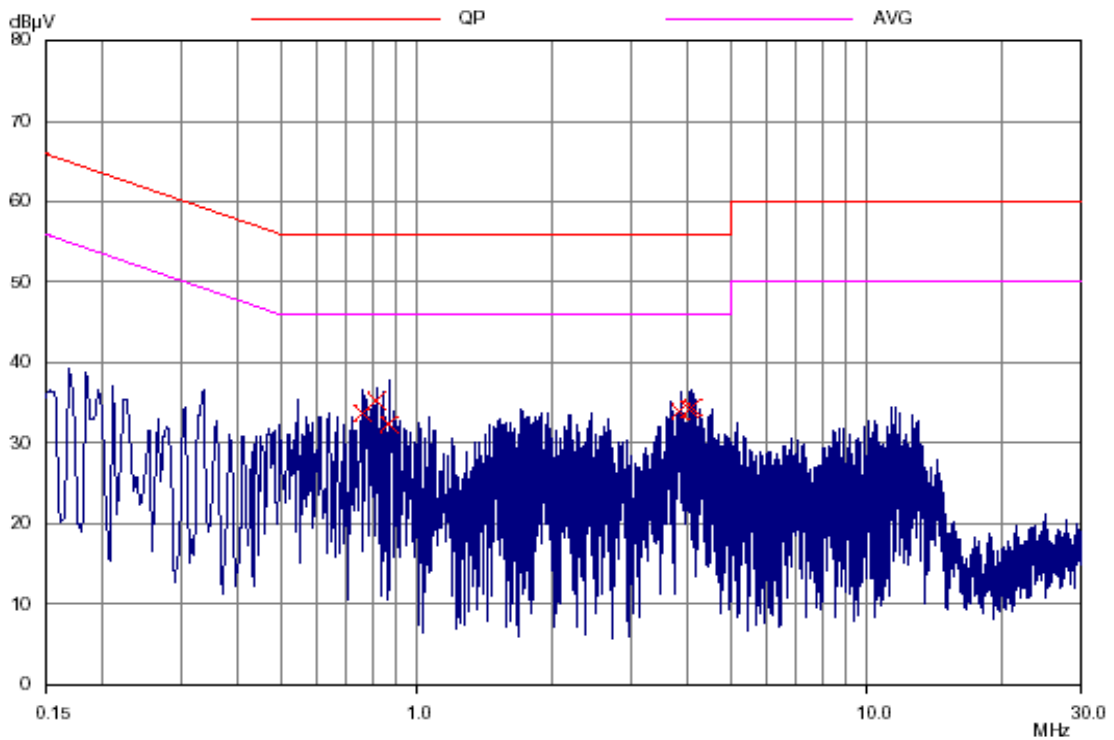

Model No.: A490 / Adaptor 2Operation Mode : Base On LineNeutralTest Date : Nov. 22, 2009Temperature : 20 °CHumidity : 72 %

Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.689	34.8	----	0.4	35.2	----	56.0	46.0	-20.8	----
0.713	32.2	----	0.4	32.6	----	56.0	46.0	-23.4	----
0.994	30.3	----	0.4	30.7	----	56.0	46.0	-25.3	----
1.439	32.4	----	0.4	32.8	----	56.0	46.0	-23.2	----
1.709	28.8	----	0.4	29.2	----	56.0	46.0	-26.8	----
2.103	27.4	----	0.5	27.9	----	56.0	46.0	-28.1	----

Operation Mode : Base On LineLine


Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.545	39.7	----	0.4	40.1	----	56.0	46.0	-15.9	----
0.572	38.4	----	0.4	38.8	----	56.0	46.0	-17.2	----
0.685	37.0	----	0.4	37.4	----	56.0	46.0	-18.6	----
1.033	34.8	----	0.4	35.2	----	56.0	46.0	-20.8	----
1.470	34.1	----	0.4	34.5	----	56.0	46.0	-21.5	----
1.529	34.5	----	0.4	34.9	----	56.0	46.0	-21.1	----

Note :

1. “***” means the value was too low to be measured.
2. If the data table appeared symbol of “----“ means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.


Mode: Base On Line

Neutral

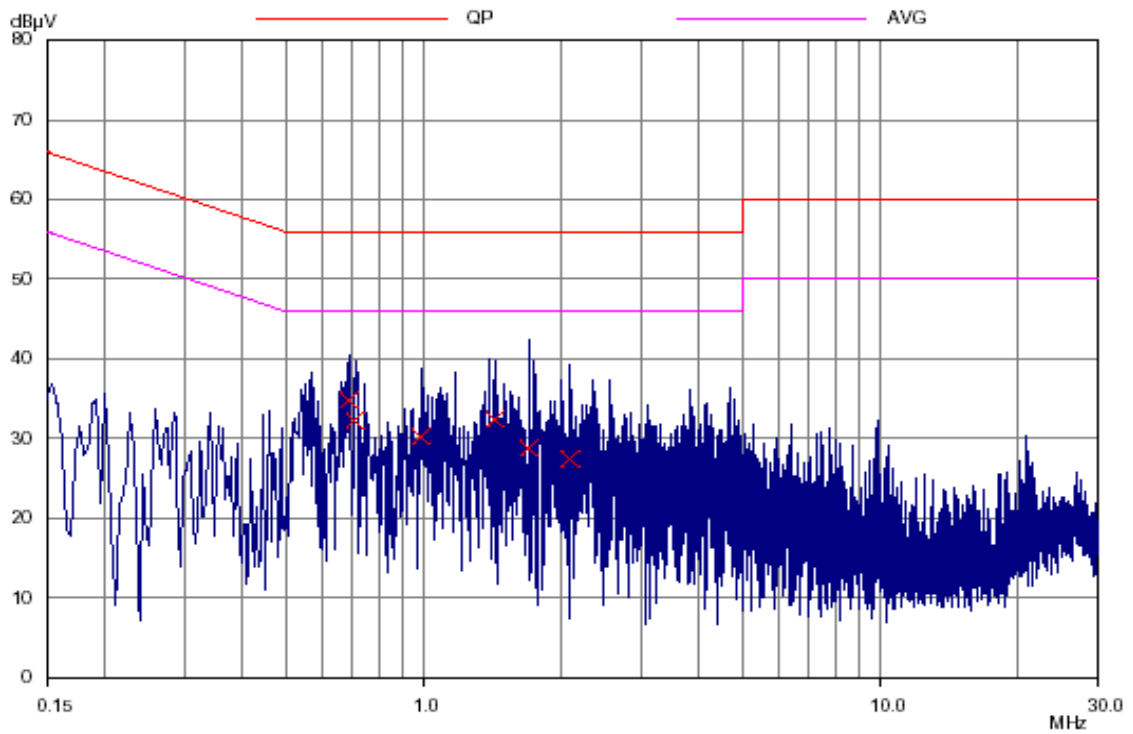

Mode: Base On Line

Line

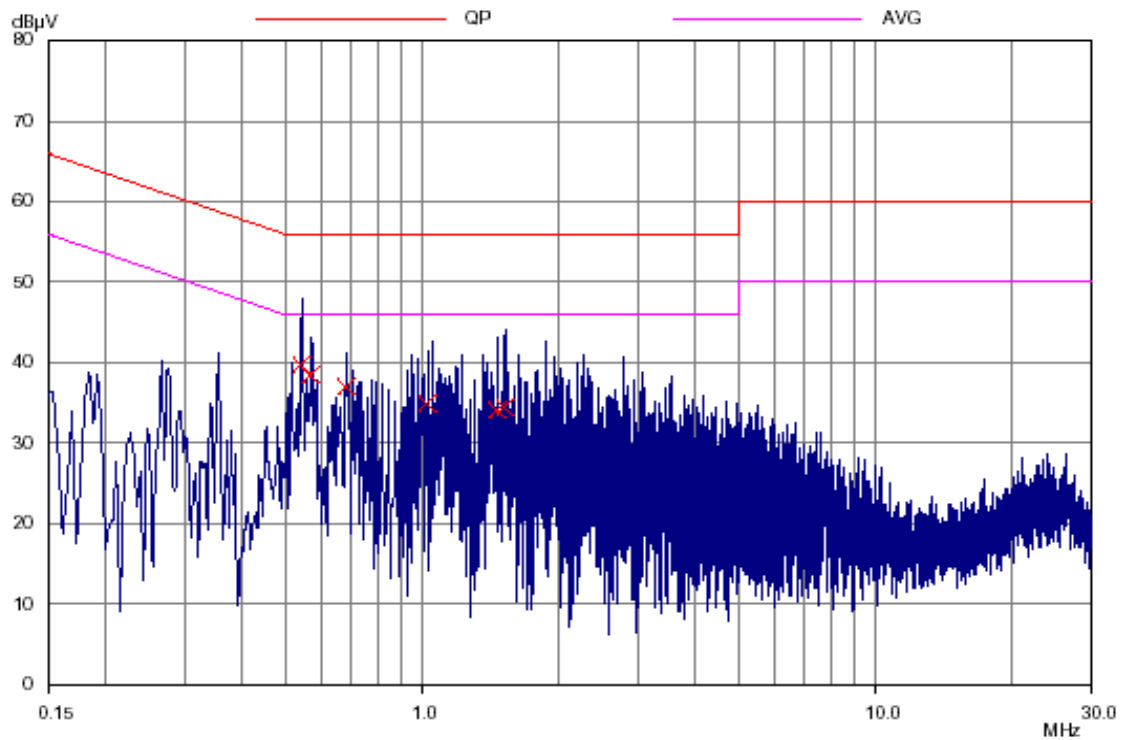

Model No.: A490 / Adaptor 2Operation Mode : Base ChargingNeutralTest Date : Nov. 22, 2009Temperature : 20 °CHumidity : 72 %

Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.576	38.3	----	0.4	38.7	----	56.0	46.0	-17.3	----
0.673	35.1	----	0.4	35.5	----	56.0	46.0	-20.5	----
0.795	30.0	----	0.4	30.4	----	56.0	46.0	-25.6	----
1.103	34.5	----	0.4	34.9	----	56.0	46.0	-21.1	----
1.263	31.5	----	0.4	31.9	----	56.0	46.0	-24.1	----
2.369	31.4	----	0.5	31.9	----	56.0	46.0	-24.1	----

Operation Mode : Base ChargingLine


Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.541	41.0	----	0.4	41.4	----	56.0	46.0	-14.6	----
0.572	41.3	----	0.4	41.7	----	56.0	46.0	-14.3	----
0.693	41.0	----	0.4	41.4	----	56.0	46.0	-14.6	----
0.955	37.8	----	0.4	38.2	----	56.0	46.0	-17.8	----
1.002	37.2	----	0.4	37.6	----	56.0	46.0	-18.4	----
1.388	37.7	----	0.4	38.1	----	56.0	46.0	-17.9	----

Note :

1. “***” means the value was too low to be measured.
2. If the data table appeared symbol of “----“ means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.


Mode: Base Charging

Neutral

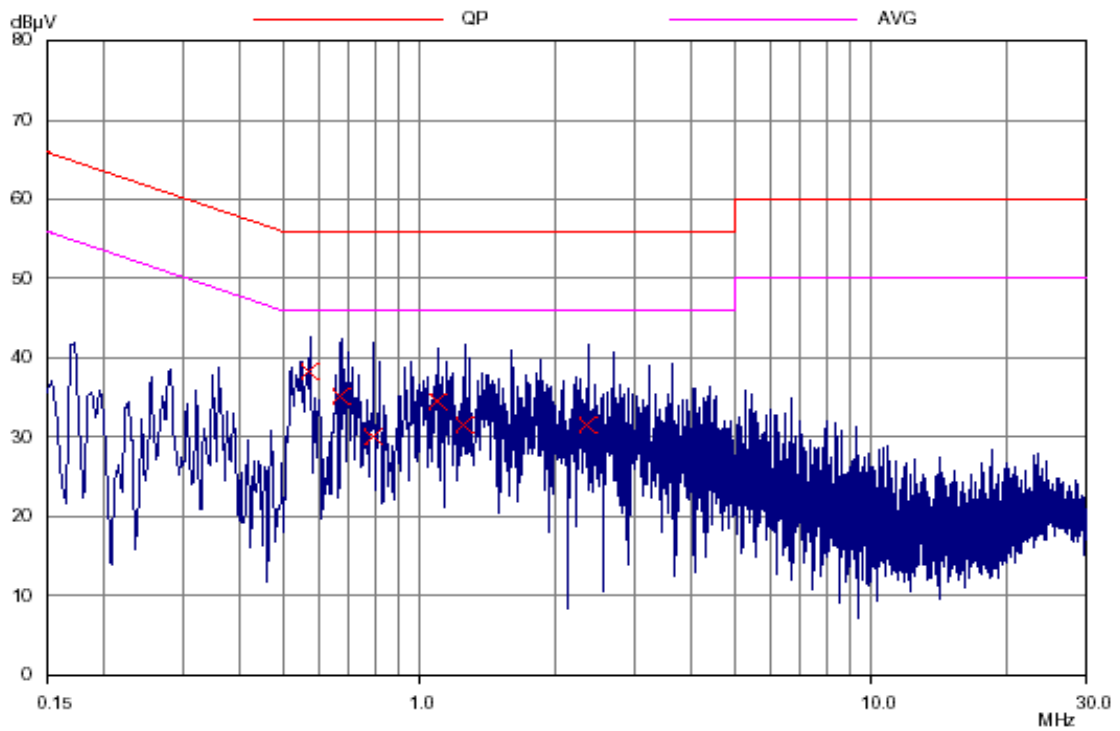

Mode: Base Charging

Line

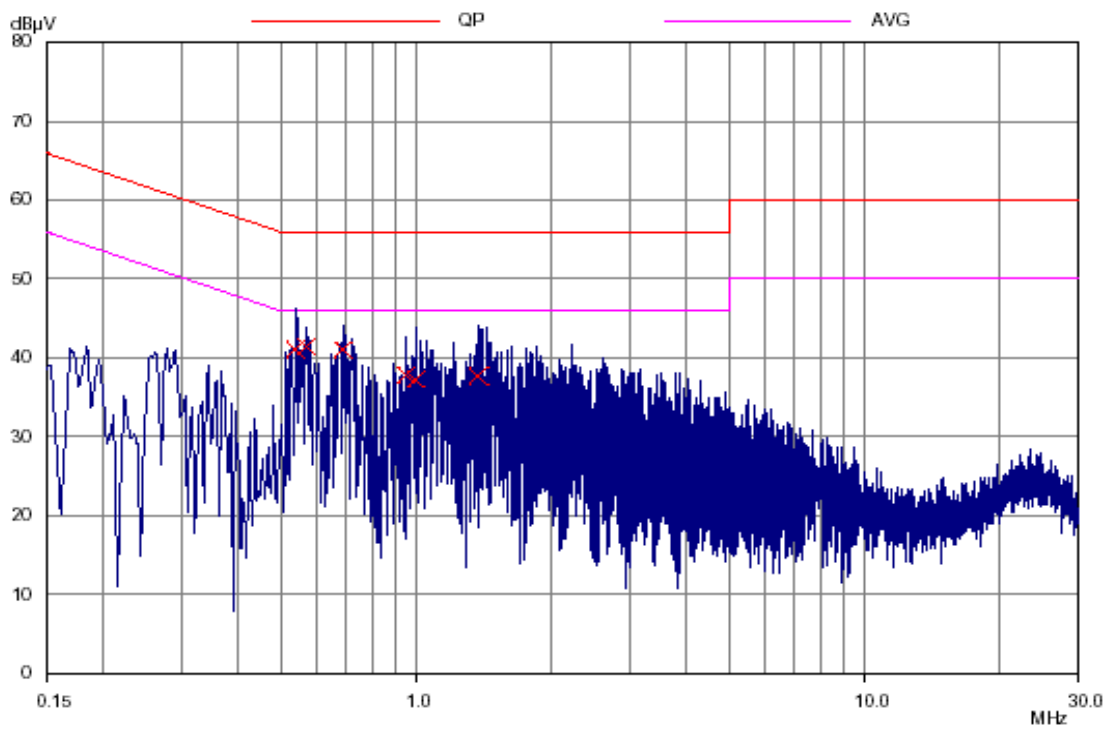

Model No.: A495 / Adaptor 1Operation Mode : Base On LineNeutralTest Date : Nov. 22, 2009Temperature : 20 °CHumidity : 72 %

Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.154	38.0	----	0.4	38.4	----	65.8	55.8	-27.4	----
0.193	35.5	----	0.4	35.9	----	63.9	53.9	-28.0	----
0.338	27.4	----	0.4	27.8	----	59.3	49.3	-31.5	----
4.045	25.1	----	0.5	25.6	----	56.0	46.0	-30.4	----
4.220	24.5	----	0.5	25.0	----	56.0	46.0	-31.0	----
4.373	24.7	----	0.5	25.2	----	56.0	46.0	-30.8	----

Operation Mode : Base On LineLine


Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.193	35.5	----	0.3	35.8	----	63.9	53.9	-28.1	----
0.334	34.2	----	0.3	34.5	----	59.4	49.4	-24.9	----
3.955	29.9	----	0.5	30.4	----	56.0	46.0	-25.6	----
4.060	31.0	----	0.5	31.5	----	56.0	46.0	-24.5	----
4.197	29.2	----	0.5	29.7	----	56.0	46.0	-26.3	----
4.392	31.4	----	0.5	31.9	----	56.0	46.0	-24.1	----

Note :

1. “***” means the value was too low to be measured.
2. If the data table appeared symbol of “----“ means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.


Mode: Base On Line

Neutral

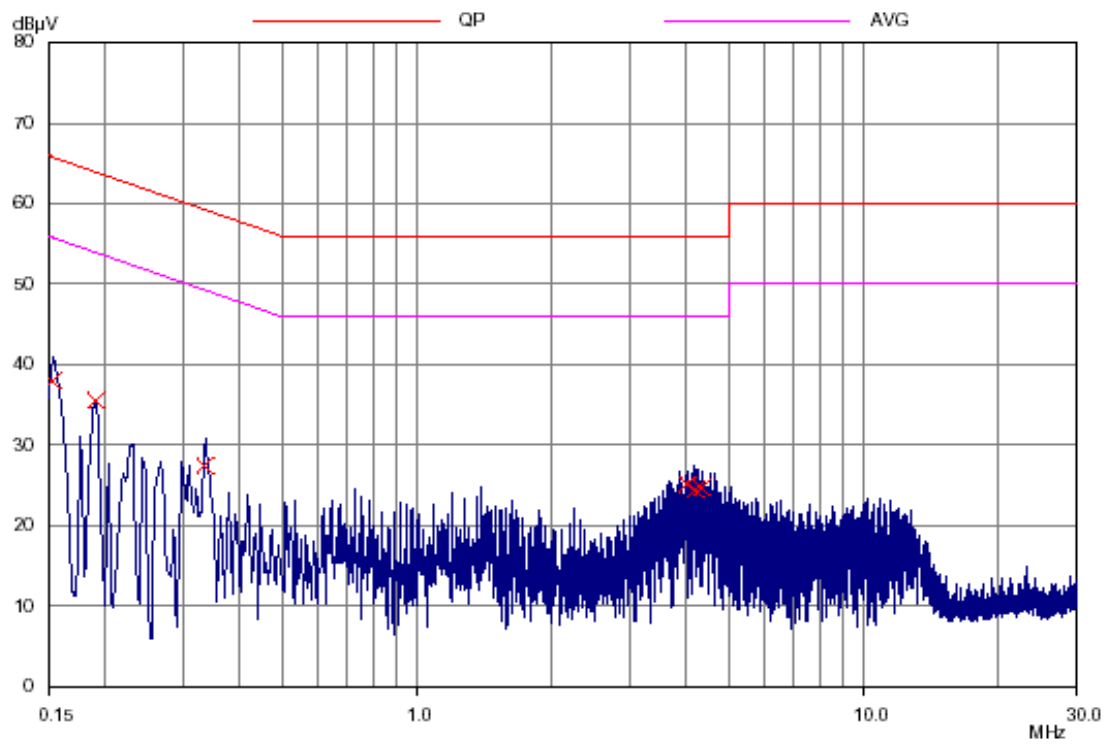

Mode: Base On Line

Line

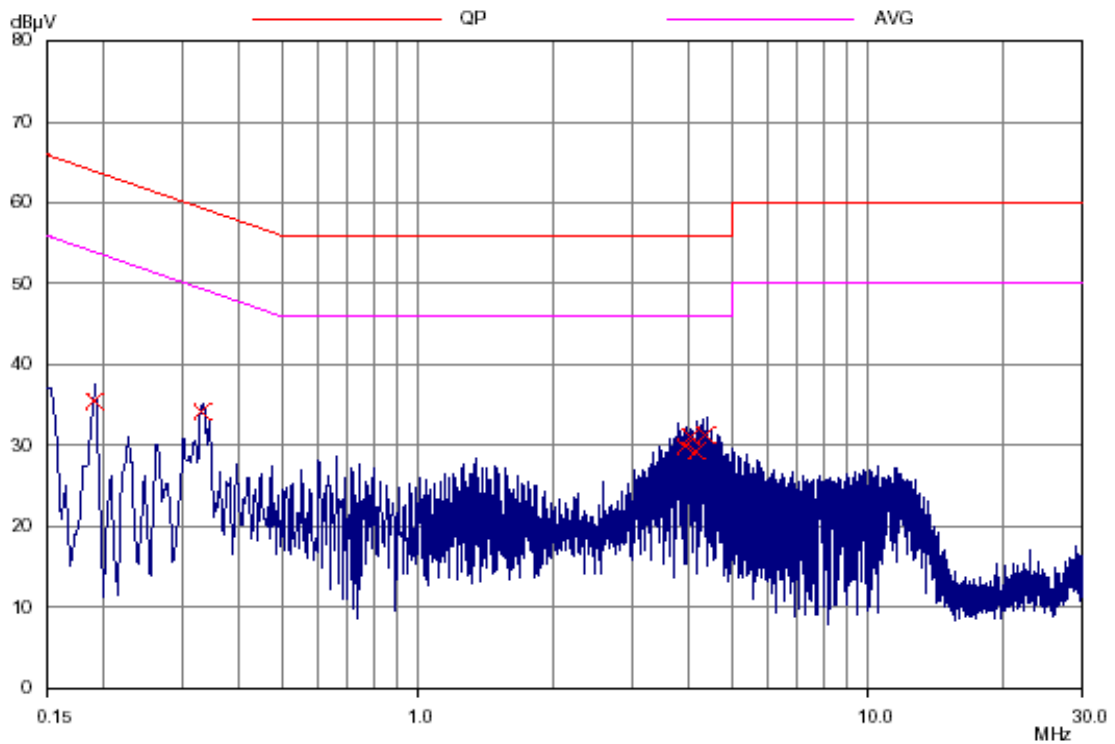

Model No.: A495 / Adaptor 1Operation Mode : Base ChargingNeutralTest Date : Nov. 22, 2009Temperature : 20 °CHumidity : 72 %

Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.154	45.1	----	0.4	45.5	----	65.8	55.8	-20.3	----
0.166	42.1	----	0.4	42.5	----	65.2	55.2	-22.7	----
0.193	40.2	----	0.4	40.6	----	63.9	53.9	-23.3	----
0.884	30.0	----	0.4	30.4	----	56.0	46.0	-25.6	----
0.935	28.2	----	0.4	28.6	----	56.0	46.0	-27.4	----
1.025	28.0	----	0.4	28.4	----	56.0	46.0	-27.6	----

Operation Mode : Base ChargingLine


Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.666	35.4	----	0.4	35.8	----	56.0	46.0	-20.2	----
0.720	35.3	----	0.4	35.7	----	56.0	46.0	-20.3	----
0.802	36.5	----	0.4	36.9	----	56.0	46.0	-19.1	----
0.830	35.6	----	0.4	36.0	----	56.0	46.0	-20.0	----
0.884	35.2	----	0.4	35.6	----	56.0	46.0	-20.4	----
4.091	35.5	----	0.5	36.0	----	56.0	46.0	-20.0	----

Note :

1. “***” means the value was too low to be measured.
2. If the data table appeared symbol of “----“ means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.


Mode: Base Charging

Neutral

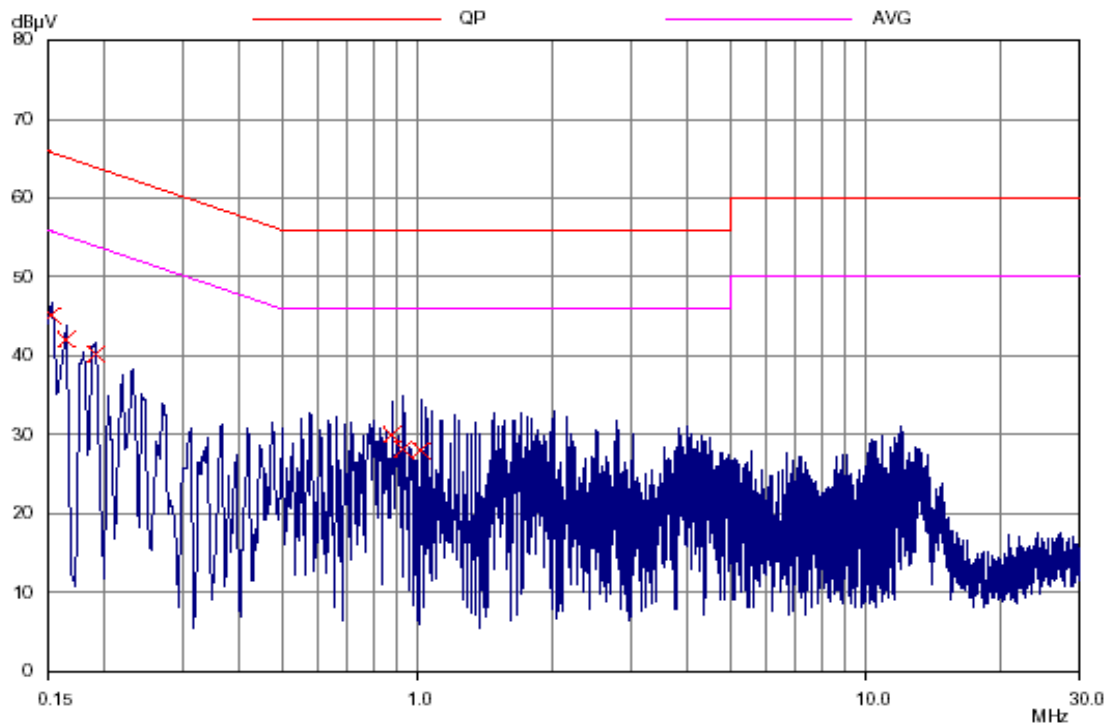

Mode: Base Charging

Line

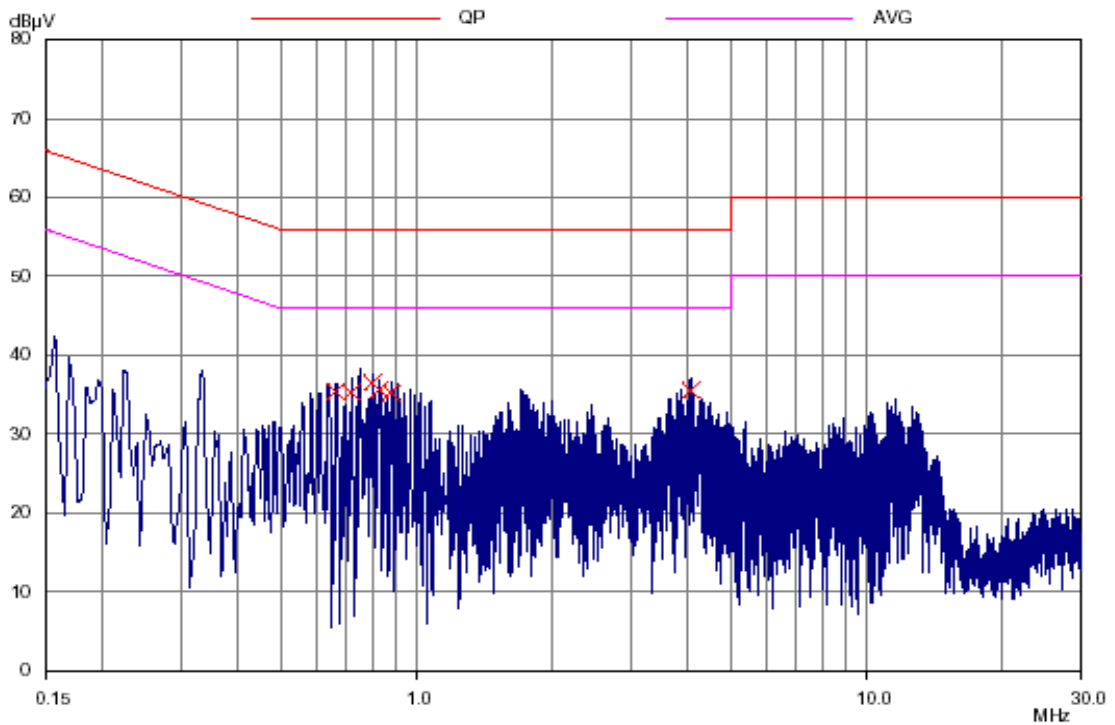

Model No.: A495 / Adaptor 2Operation Mode : Base On LineNeutralTest Date : Nov. 22, 2009Temperature : 20 °CHumidity : 72 %

Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.545	35.7	----	0.4	36.1	----	56.0	46.0	-19.9	----
0.556	34.4	----	0.4	34.8	----	56.0	46.0	-21.2	----
0.709	32.4	----	0.4	32.8	----	56.0	46.0	-23.2	----
1.076	31.2	----	0.4	31.6	----	56.0	46.0	-24.4	----
1.365	29.7	----	0.4	30.1	----	56.0	46.0	-25.9	----
1.529	30.5	----	0.4	30.9	----	56.0	46.0	-25.1	----

Operation Mode : Base On LineLine


Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.537	38.6	----	0.4	39.0	----	56.0	46.0	-17.0	----
0.689	38.1	----	0.4	38.5	----	56.0	46.0	-17.5	----
0.724	36.0	----	0.4	36.4	----	56.0	46.0	-19.6	----
1.080	34.6	----	0.4	35.0	----	56.0	46.0	-21.0	----
1.158	33.9	----	0.4	34.3	----	56.0	46.0	-21.7	----
1.545	33.9	----	0.4	34.3	----	56.0	46.0	-21.7	----

Note :

1. “***” means the value was too low to be measured.
2. If the data table appeared symbol of “----“ means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.


Mode: Base On Line

Neutral

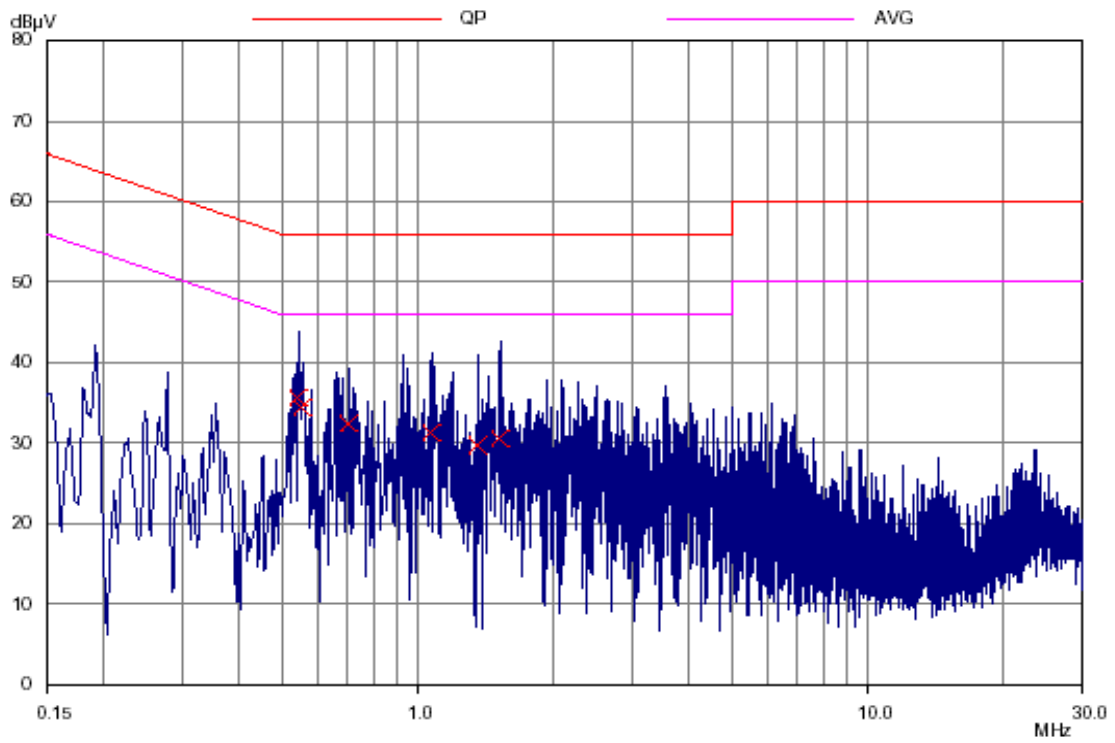

Mode: Base On Line

Line

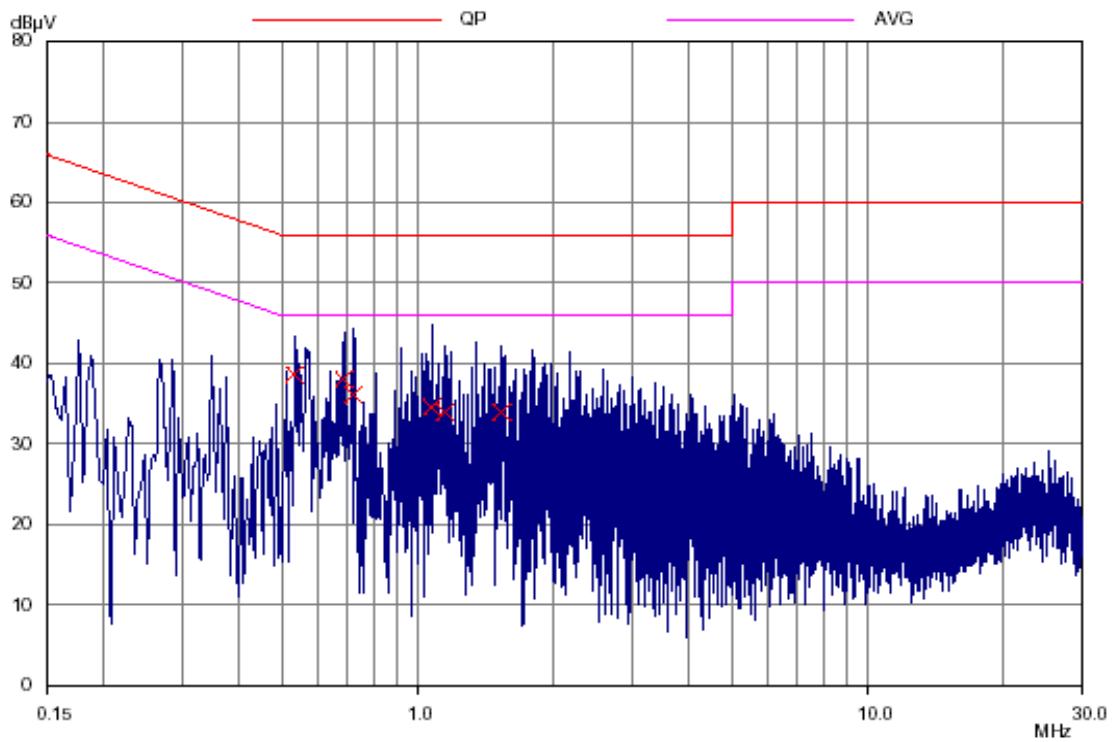

Model No.: A495 / Adaptor 2Operation Mode : Base ChargingNeutralTest Date : Nov. 22, 2009Temperature : 20 °CHumidity : 72 %

Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.552	38.2	----	0.4	38.6	----	56.0	46.0	-17.4	----
0.787	30.3	----	0.4	30.7	----	56.0	46.0	-25.3	----
1.298	31.2	----	0.4	31.6	----	56.0	46.0	-24.4	----
1.470	34.6	----	0.4	35.0	----	56.0	46.0	-21.0	----
1.990	30.9	----	0.5	31.4	----	56.0	46.0	-24.6	----
2.361	32.1	----	0.5	32.6	----	56.0	46.0	-23.4	----

Operation Mode : Base ChargingLine


Frequency (MHz)	Meter Reading (dB μ V)		Factor (dB)	Result (dB μ V)		Limit (dB μ V)		Margin (dB μ V)	
	Q.P	AVG		Q.P	AVG	Q.P	AVG	Q.P	AVG
0.552	42.1	----	0.4	42.5	----	56.0	46.0	-13.5	----
0.673	39.4	----	0.4	39.8	----	56.0	46.0	-16.2	----
0.693	41.0	----	0.4	41.4	----	56.0	46.0	-14.6	----
0.728	38.4	----	0.4	38.8	----	56.0	46.0	-17.2	----
1.423	37.5	----	0.4	37.9	----	56.0	46.0	-18.1	----
1.505	36.0	----	0.4	36.4	----	56.0	46.0	-19.6	----

Note :

1. “***” means the value was too low to be measured.
2. If the data table appeared symbol of “----“ means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.


Mode: Base Charging

Neutral

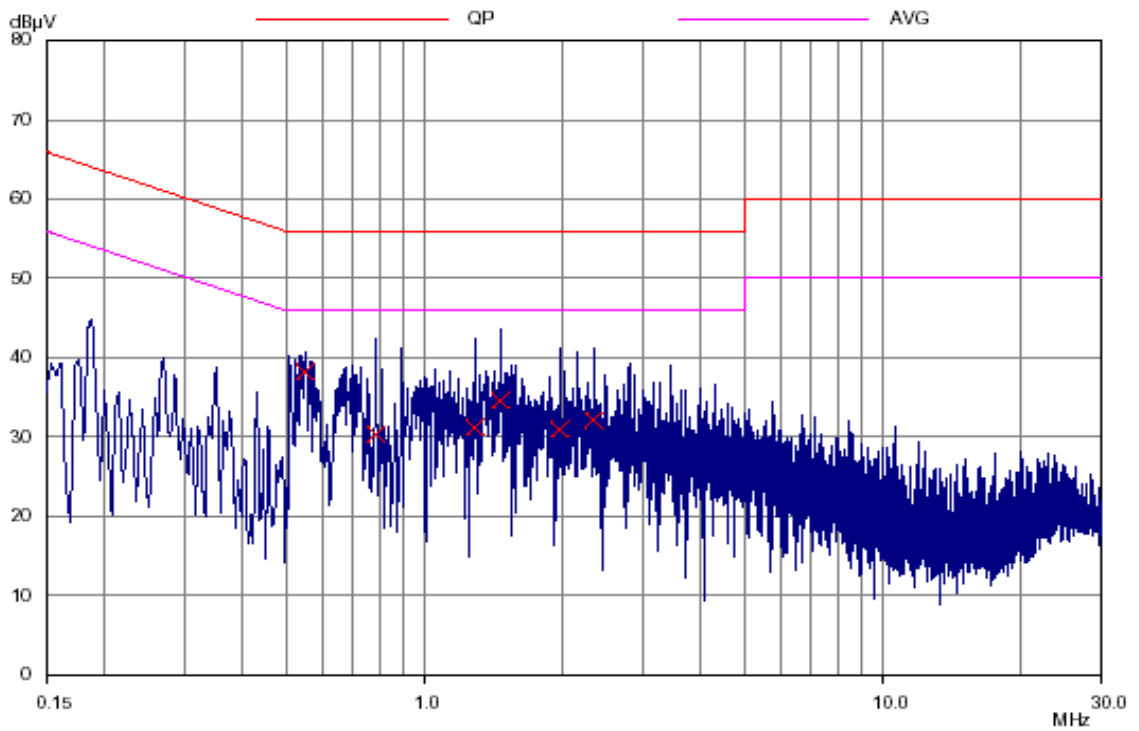

Mode: Base Charging

Line

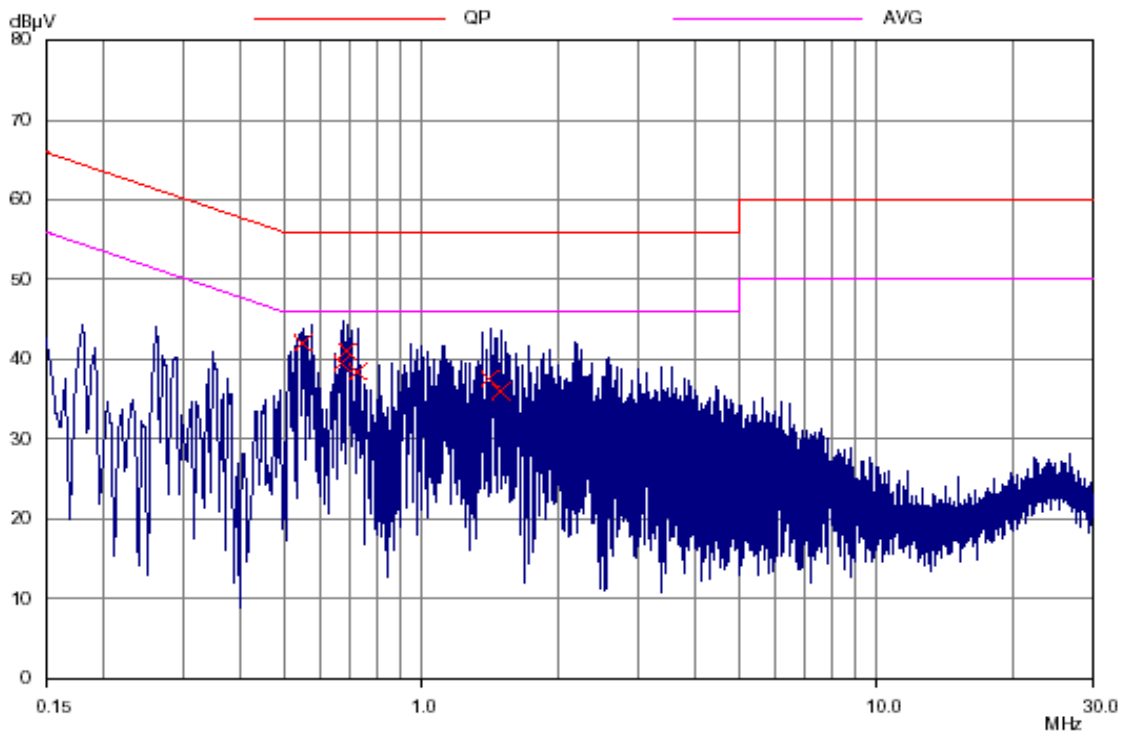

6.4.4 Photos of Conduction Measuring Setup

Model No.: A490/ Mode: Base On Line



Model No.: A490/ Mode: Base Charging



Model No.: A495/ Mode: Base On Line



Model No.: A495/ Mode: Base Charging



6.5 Antenna Requirement

6.5.1 Standard Applicable

FCC 15.317, 15.203

Does the EUT have detachable antenna?

Yes

No

If detachable, is the antenna connector non-standard?

Yes

No

The tested equipment has only integral antennas. The conducted tests were performed on a sample with a temporary antenna connects.

6.6 digital Modulation Techniques

6.6.1 Standard Applicable

FCC 15.319(b)

All transmissions must use only digital modulation techniques.

6.6.2 Result: Meets the requirement

Please see the declaration provided by applicant

6.7 Peak Power Output

6.7.1 Standard Applicable

FCC 15.319(c)(f)

Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in Hz.

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

6.7.2 Measurement procedure

Measurement method according to ANSI C63.17 2006 paragraph 6.1.2

6.7.3 Test Results: Complies

Measurement Data:


Channel	Frequency (MHz)	Maximum Peak Output Power (dBm)	Maximum Peak Output Power (mw)	FCC Limit (dBm)
F _L	1921.230	19.63	91.833	20.78
F _H	1928.770	19.64	92.045	20.78

Limit:

Peak Transmit Power = 100 uW x \sqrt{BW}


BW = Emission Bandwidth in Hz.

Maximum Peak Output Power: CH F_L

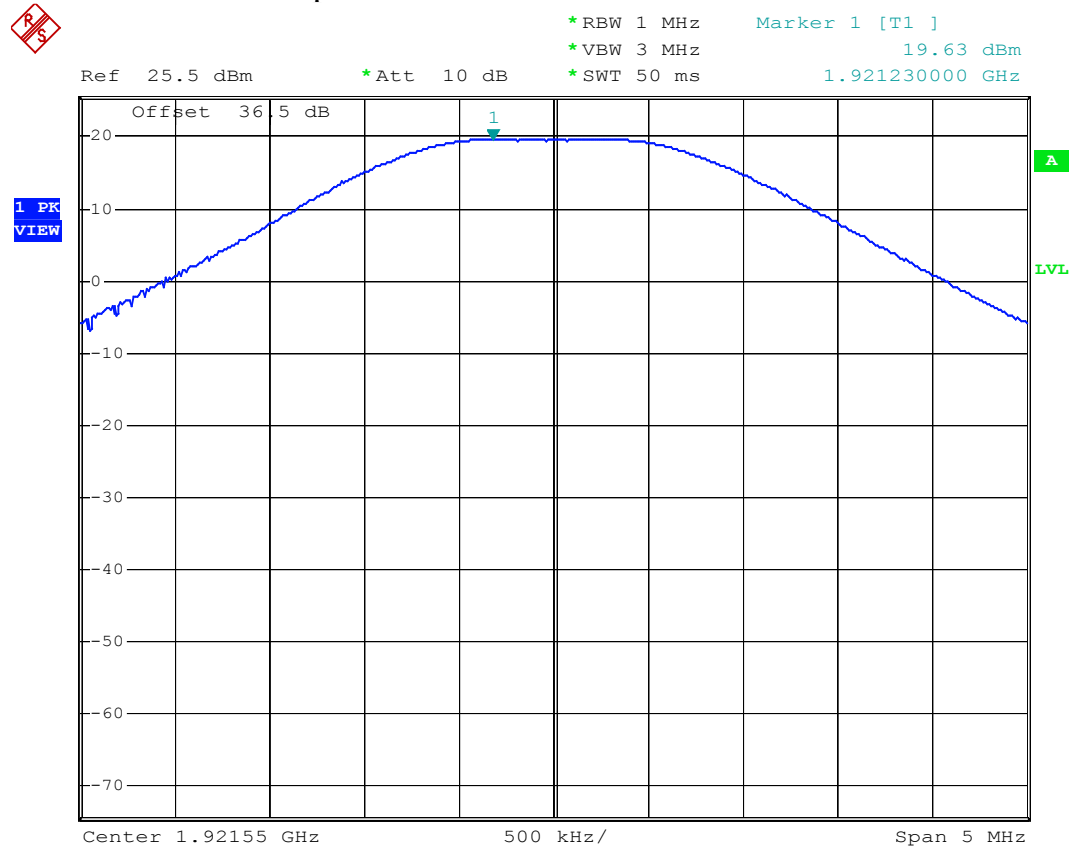

Date: 16.NOV.2009 15:46:27

Maximum Peak Output Power: CH F_H

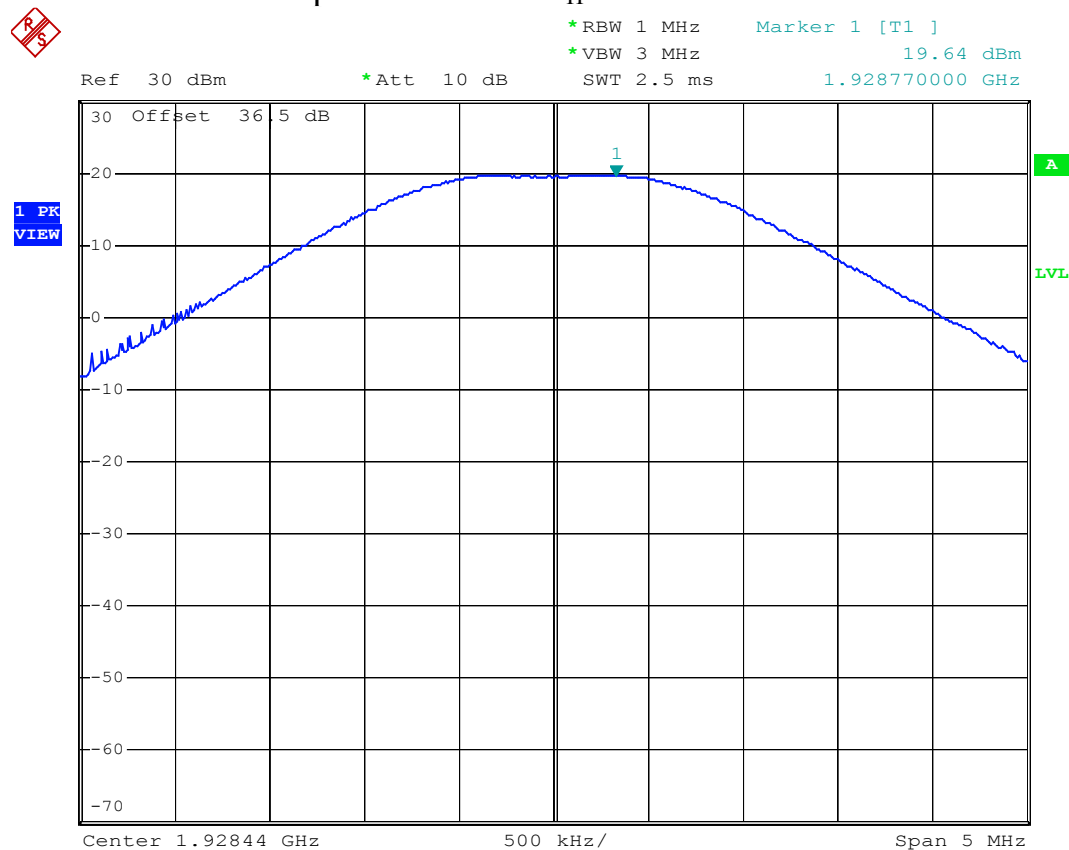

Date: 16.NOV.2009 16:36:24

6.8 Power Spectral Density

6.8.1 Standard Applicable

FCC 15.319(d)

Power spectral density shall not exceed 3 milliwatts in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

6.8.2 Measurement procedure


Measurement method according to ANSI C63.17 2006 paragraph 6.1.5

6.8.3 Test Results: Complies

Measurement Data:


Channel	Frequency (MHz)	Power spectral Density (dBm)	FCC Limit (dBm)
F _L	1921.536	3.09	4.77
F _H	1928.448	3.83	4.77

Power Spectral Density: CH F_L

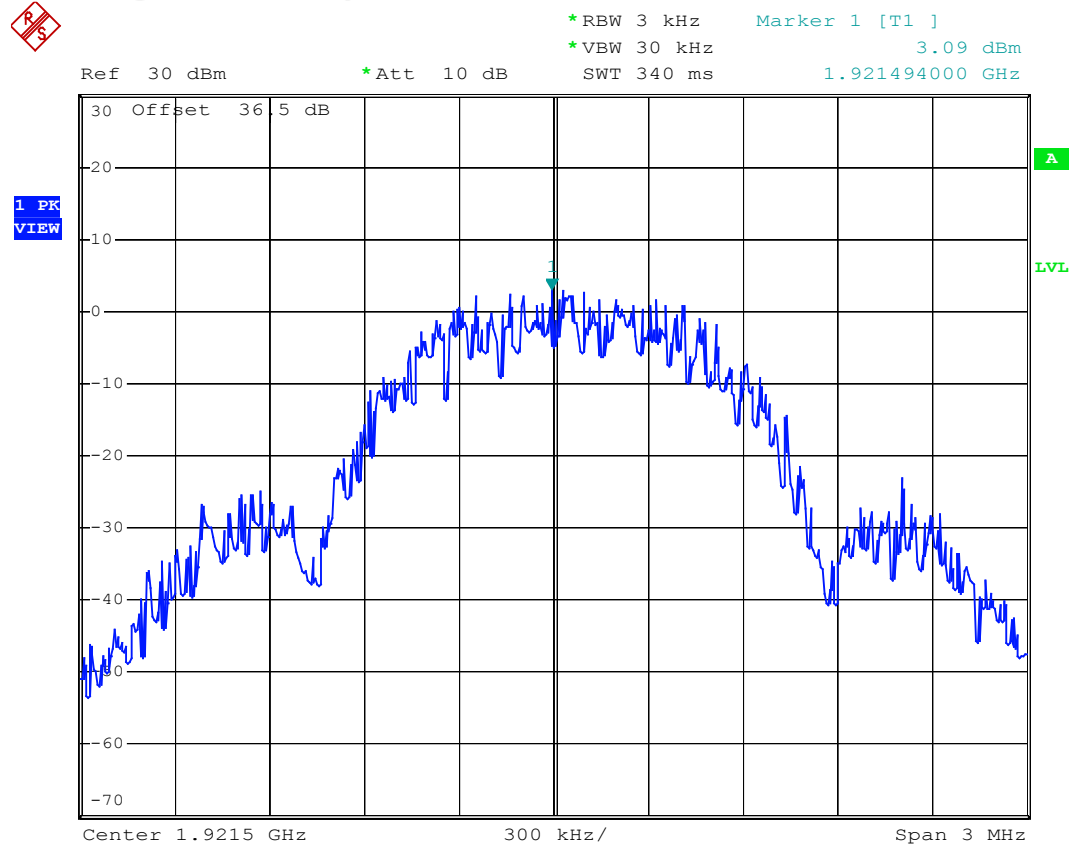

Date: 19.NOV.2009 15:51:34

Power Spectral Density: CH F_H

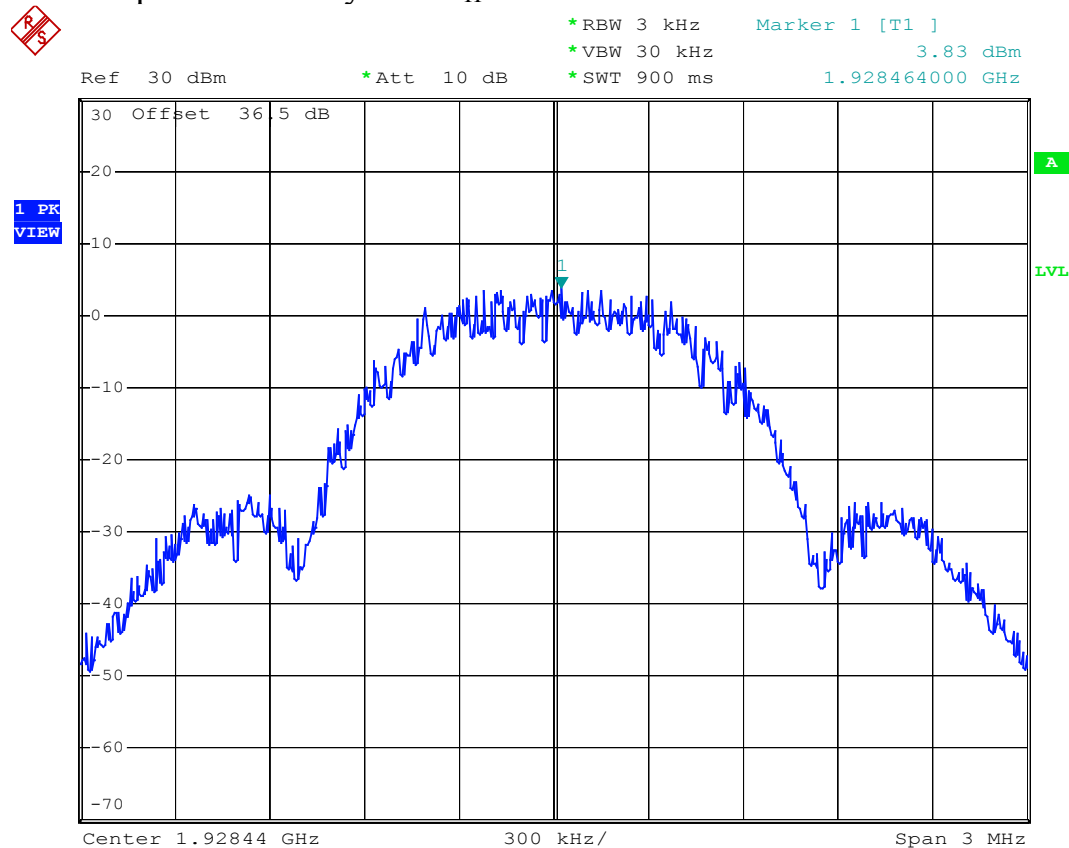

Date: 16.NOV.2009 16:37:38

6.9 Antenna Gain

6.9.1 Standard Applicable

FCC 15.323(e)

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

6.9.2 Results: Meets the requirement

The antenna gain value provided by manufacturer is 0 dBi.

6.10 Automatic discontinuation of transmission

6.10.1 Standard Applicable

FCC 15.319(f)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

6.10.2 Procedure

Please see the declaration provided by applicant.

6.10.3 Results: Meets the requirement

6.11 Safety exposure levels

6.11.1 Standard Applicable

FCC 15.319(i)

UPCS devices are subject to the radio frequency radiation exposure requirements specified in FCC parts 1.1307 (b), 2.1091 and 2.1093, as appropriate. All equipment shall be considered to operate in a “general population / uncontrolled environment. For portable devices tests according to IEEE 1528 are requested, applicable.

6.11.2 Measurement procedure

Consideration of radio frequency radiation exposure for EUT is done as

SAR test according IEEE 1528 (for PP)	<input type="checkbox"/>
MPE calculation as below (for FP, Repeater)	<input checked="" type="checkbox"/>

SAR test results: not applicable

MPE calculation:

The EUT is considered as a mobile device according to OET Bulletin 65, Edition –97-01. Therefore distance to human body of min. 20 cm is determined.

The limit of Power density for General Population / Umcontrolled Exposure is 1.0 mW/cm².

Formula:

$$S = \text{EIRP} / 4\pi R^2$$

Calculation:

EIRP	Radiated Power (dBm)	19.64
EIRP	Radiated Power (mW)	92.05
R	Disance (cm)	20
S	Power Density (mW/cm ²)	0.018

6.11.3 Results: Complies

6.12 Emission Bandwidth B

6.12.1 Standard Applicable

FCC 15.323(a)

The 26 dB Bandwidth B shall be larger than 50 kHz and less than 2.5 MHz.

6.12.2 Measurement procedure

Measurement method according to ANSI C63.17 2006 paragraph 6.1.3

6.12.3 Test Results: Complies

Measurement Data:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
F _L	1921.536	1.43
F _H	1928.448	1.43


26 dB Bandwidth B: CH FL



*RBW 30 kHz Marker 1 [T1]
*VBW 100 kHz 17.95 dBm
*SWT 50 ms 1.921550000 GHz

Ref 25.5 dBm

*Att 10 dB

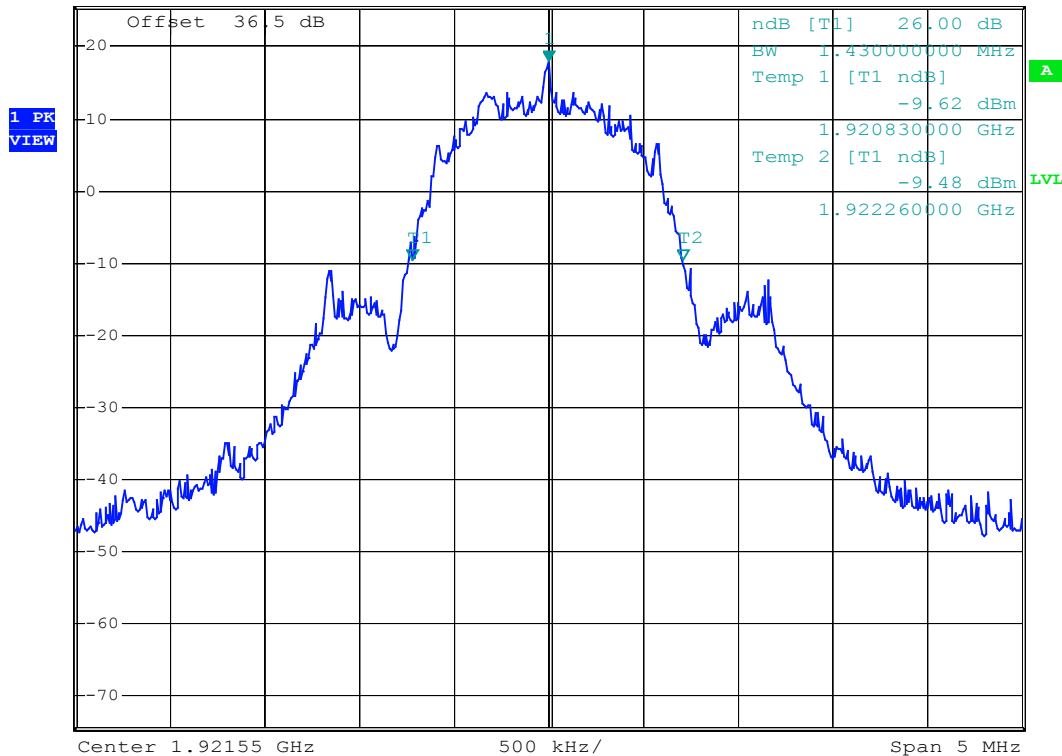

Date: 16.NOV.2009 15:45:54

26 dB Bandwidth B: CH F_H




*RBW 30 kHz Marker 1 [T1]
VBW 100 kHz 18.52 dBm
SWT 10 ms 1.928460000 GHz

Ref 30 dBm

*Att 10 dB

1 PK
VIEW

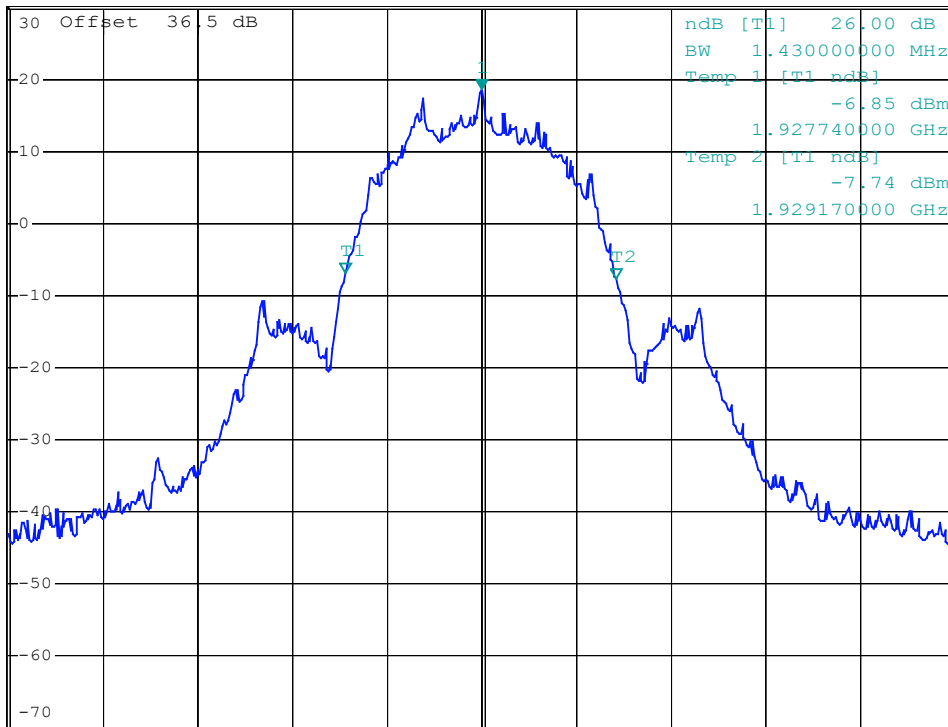

Center 1.92846 GHz

500 kHz/

Span 5 MHz

Date: 19.NOV.2009 15:34:12

6.13 Emissions inside and outside the subband

6.13.1 Standard Applicable

FCC 15.323(d)

Emissions inside the subband

$B < f \leq 2B$: less than or equal to 30dB below max. permitted peak power level

$2B < f \leq 3B$: less than or equal to 50 dB below max. permitted peak power level

$3B < f \leq$ UPCs Band Edge: less than or equal to 60 dB below max. permitted peak power level

Emissions outside the subband

$f \leq 1.25\text{MHz}$ outside UPCS band: $\leq -9.5\text{dBm}$

$1.25\text{MHz} \leq f \leq 2.5\text{MHz}$ outside UPCS band: $\leq -29.5\text{dBm}$

$f \geq 2.5\text{MHz}$ outside UPCS band: The EUT shall pass the test either a) or b) as follow:

a) In the region at 2.5 MHz or greater below and above the lower and upper band edges respectively, the measured emission level shall not exceed -39.5 dBm	<input type="checkbox"/>
b) In the region at 2.5MHz or greater below and above the lower and upper band edges respectively, the measured emission level shall not exceed the limits of 47CFR15.209. Measurement shall be made as a radiated test.	<input checked="" type="checkbox"/>

6.13.2 Measurement procedure


Measurement method according to ANSI C63.17 2006 paragraph 6.1.6

6.13.3 Results: Complies

Measurement Data:


See plots.

In-band Unwanted Emission: CH F_L

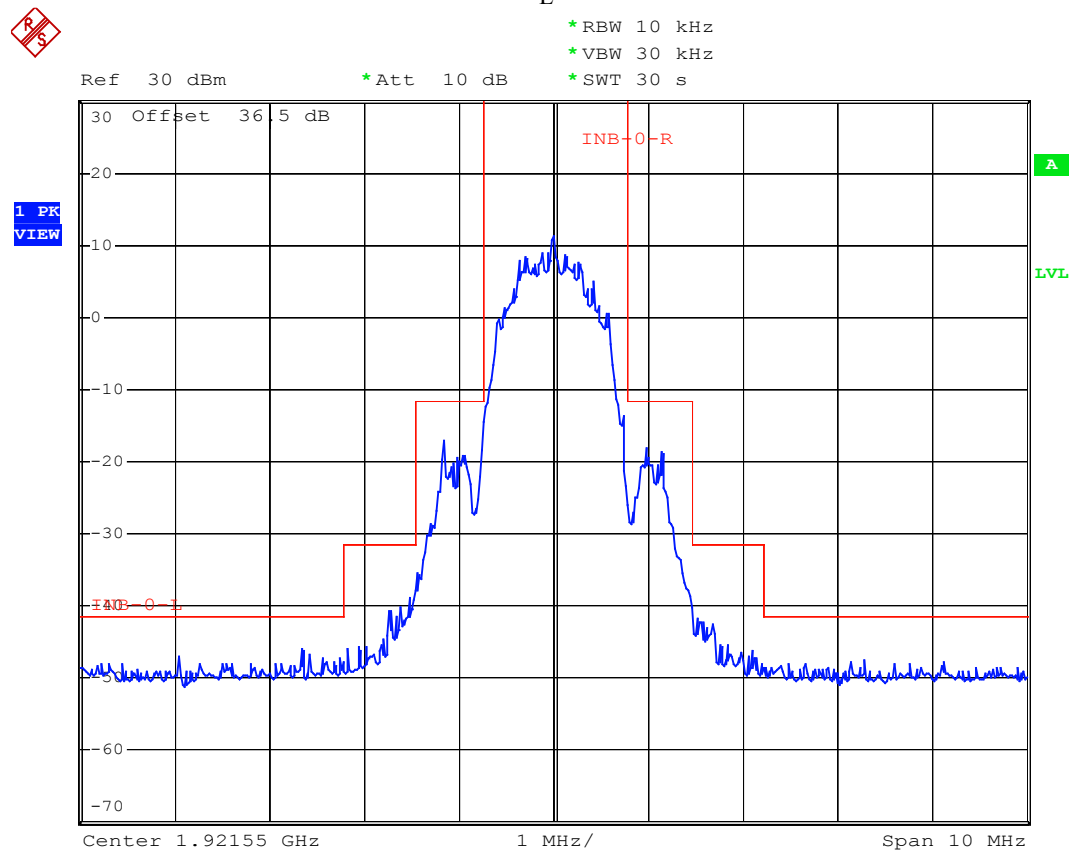

Date: 16.NOV.2009 15:56:42

In-band Unwanted Emission: CH F_H

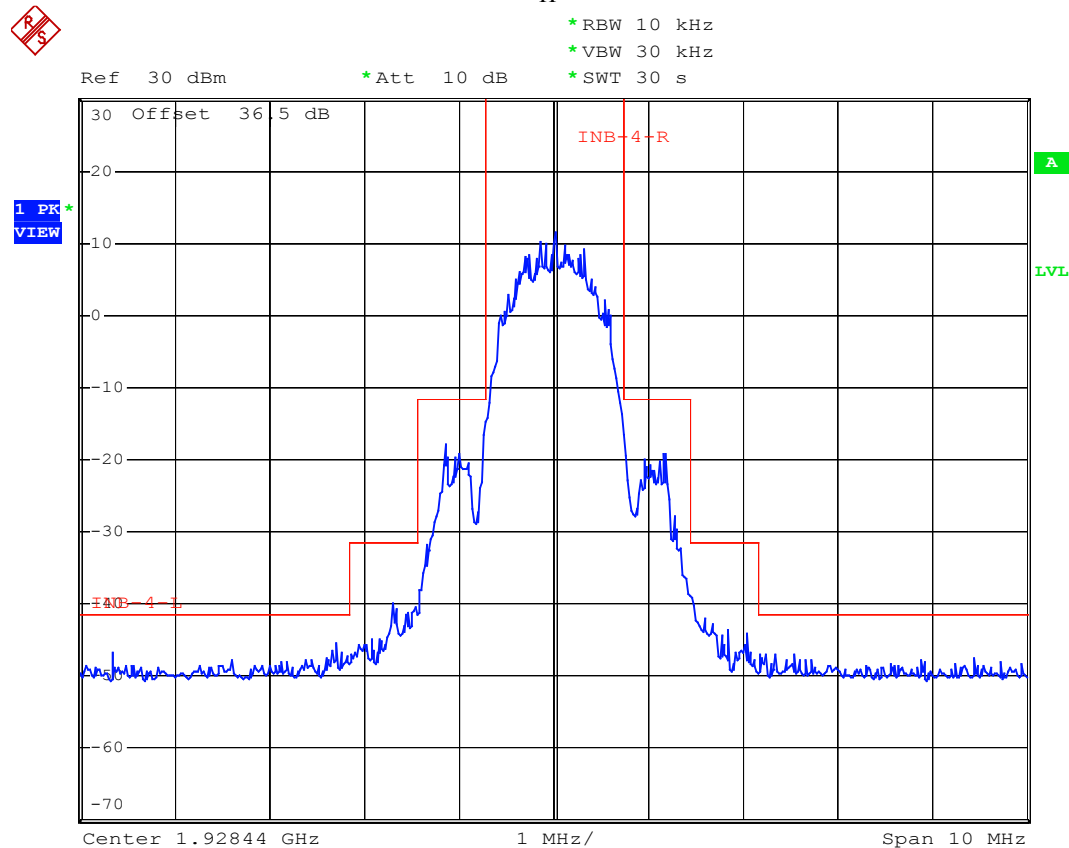

Date: 16.NOV.2009 16:45:01

Out-of -band Unwanted Emission:

Out-of -band Unwanted Emission (below 1GHz)

a)

Model No.: A490/ Adaptor 1Operation Mode : Base On LineTest Date : Nov. 22, 2009 Temperature : 20 °C Humidity : 72 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
49.17	V	16.8	11.5	28.3	40.0	-11.7	191	1.7
169.05	V	14.3	15.0	29.3	43.5	-14.2	39	1.7
190.38	V	14.2	17.6	31.8	43.5	-11.7	61	1.2
211.17	V	14.3	18.6	32.9	43.5	-10.6	176	1.8
221.97	V	11.1	18.8	29.9	46.0	-16.1	69	1.9
232.05	V	15.0	19.2	34.2	46.0	-11.8	359	1.4

Note :

1. Remark "---" means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Model No.: A490/ Adaptor 1Operation Mode : Base ChargingTest Date : Nov. 22, 2009 Temperature : 20 °C Humidity : 72 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
49.17	V	21.4	11.5	32.9	40.0	-7.1	125	1.0
168.78	V	14.7	15.0	29.7	43.5	-13.8	201	1.0
190.38	V	13.4	17.6	31.0	43.5	-12.5	211	1.4
211.17	V	15.0	18.6	33.6	43.5	-9.9	194	1.8
221.97	V	12.3	18.8	31.1	46.0	-14.9	357	1.8
232.51	V	15.0	19.3	34.3	46.0	-11.7	299	1.9

Note :

1. Remark "---" means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Model No.: A490/ Adaptor 2Operation Mode : Base On LineTest Date : Nov. 22, 2009 Temperature : 20 °C Humidity : 72 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
49.17	V	25.3	11.5	36.8	40.0	-3.2	98	1.0
125.85	V	14.0	13.3	27.3	43.5	-16.2	44	1.0
134.22	V	12.9	13.7	26.6	43.5	-16.9	126	1.0
159.06	V	12.9	14.6	27.5	43.5	-16.0	14	1.0
235.74	V	6.0	19.5	25.5	46.0	-20.5	148	1.0
269.22	V	7.6	22.3	29.9	46.0	-16.1	82	1.4

Note :

1. Remark "---" means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Model No.: A490/ Adaptor 2Operation Mode : Base ChargingTest Date : Nov. 22, 2009 Temperature : 20 °C Humidity : 72 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
48.90	V	24.7	11.6	36.3	40.0	-3.7	327	1.0
129.09	V	12.2	13.5	25.7	43.5	-17.8	126	1.0
164.46	H	10.8	14.8	25.6	43.5	-17.9	98	1.4
206.85	V	6.2	18.6	24.8	43.5	-18.7	246	1.5
230.34	H	8.3	19.1	27.4	46.0	-18.6	100	1.6
258.69	H	10.8	20.6	31.4	46.0	-14.6	134	1.7

Note :

1. Remark "---" means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Model No.: A495/ Adaptor 1Operation Mode : Base On LineTest Date : Nov. 22, 2009 Temperature : 20 °C Humidity : 72 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
49.07	V	16.4	11.5	27.9	40.0	-12.1	108	1.0
168.78	H	13.1	15.0	28.1	43.5	-15.4	16	1.5
190.38	H	10.5	17.6	28.1	43.5	-15.4	275	1.0
211.17	V	14.2	18.6	32.8	43.5	-10.7	38	1.0
221.90	H	10.4	18.8	29.2	46.0	-16.8	196	1.6
232.55	H	10.6	19.3	29.9	46.0	-16.1	348	1.7

Note :

1. Remark "---" means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Model No.: A495/ Adaptor 1Operation Mode : Base ChargingTest Date : Nov. 22, 2009 Temperature : 20 °C Humidity : 72 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
32.97	V	10.8	14.4	25.2	40.0	-14.8	53	1.0
49.70	V	21.8	11.5	33.3	40.0	-6.7	90	1.0
105.33	V	12.3	11.6	23.9	43.5	-19.6	266	1.5
168.78	V	12.4	15.0	27.4	43.5	-16.1	31	1.8
211.17	V	13.7	18.6	32.3	43.5	-11.2	1	1.9
232.50	H	9.2	19.3	28.5	46.0	-17.5	110	1.4

Note :

1. Remark "---" means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Model No.: A495/ Adaptor 2Operation Mode : Base On LineTest Date : Nov. 22, 2009 Temperature : 20 °C Humidity : 72 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
49.17	V	25.1	11.5	36.6	40.0	-3.4	203	1.0
105.06	H	13.7	11.6	25.3	43.5	-18.2	52	1.4
122.61	V	14.6	13.1	27.7	43.5	-15.8	352	1.0
139.90	V	15.7	14.0	29.7	43.5	-13.8	211	1.8
164.54	V	9.3	14.8	24.1	43.5	-19.4	320	2.1
237.90	V	6.9	19.6	26.5	46.0	-19.5	230	2.2

Note :

1. Remark "---" means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Model No.: A495/ Adaptor 2Operation Mode : Base ChargingTest Date : Nov. 22, 2009 Temperature : 20 °C Humidity : 72 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
50.25	V	24.3	11.4	35.7	40.0	-4.3	232	1.0
124.50	V	18.2	13.2	31.4	43.5	-12.1	41	1.0
139.89	V	16.3	14.0	30.3	43.5	-13.2	294	1.6
164.46	V	9.2	14.8	24.0	43.5	-19.5	343	1.5
243.30	V	6.7	19.9	26.6	46.0	-19.4	147	1.0
295.41	V	9.4	21.2	30.6	46.0	-15.4	54	1.7

Note :

1. Remark "---" means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

a) CH F_LOut-of -band Unwanted Emission (above 1GHz): CH F_L**Model No.: A490**Operation Mode : TransmittingFundamental Frequency : 1921.536MHzTest Date : Nov. 17, 2009 Temperature : 23 °C Humidity : 65 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	Peak	Ave	Peak	Ave		Peak	Ave	Peak	Ave			
3843.710	54.3	---	53.6	---	-3.1	51.2	---	74.0	54.0	-2.8	99	1.5
5763.650	50.0	---	51.8	---	0.5	52.3	---	74.0	54.0	-1.7	87	1.8
7687.090	46.7	---	48.8	---	3.8	52.6	---	74.0	54.0	-1.4	59	1.7
9605.930	54.8	32.0	57.2	32.3	6.0	63.2	38.3	74.0	54.0	-10.8	63	1.5
11527.785	---	---	---	---	9.1	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark "***" means that Peak result is meet average limit.
3. Remark "---" means that the emissions level is too low to be measured.
4. Item "Margin" referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Model No.: A495Operation Mode : TransmittingFundamental Frequency : 1921.536MHzTest Date : Nov. 17, 2009 Temperature : 23 °C Humidity : 65 %

Frequency (MHz)	Reading (dBUV)				Factor (dB) Corr.	Result @3m (dBUV/m)		Limit @3m (dBUV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	V Ave	H Peak	V Ave		Peak	Ave	Peak	Ave			
3842.430	49.5	---	49.3	---	-3.1	46.4	---	74.0	54.0	-7.6	69	1.7
5765.800	49.2	---	48.6	---	0.5	49.7	---	74.0	54.0	-4.3	73	1.3
7687.242	46.8	---	47.3	---	3.7	51.0	---	74.0	54.0	-3.0	86	1.5
9609.134	55.5	32.2	55.3	32.0	6.0	61.5	38.2	74.0	54.0	-12.5	54	1.7
11530.349	---	---	---	---	9.1	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark "***" means that Peak result is meet average limit.
3. Remark "---" means that the emissions level is too low to be measured.
4. Item "Margin" referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.


Out-of-band Unwanted Emission: CH F_L



*RBW 10 kHz
*VBW 30 kHz
SWT 25 ms

Ref 30 dBm

*Att 10 dB

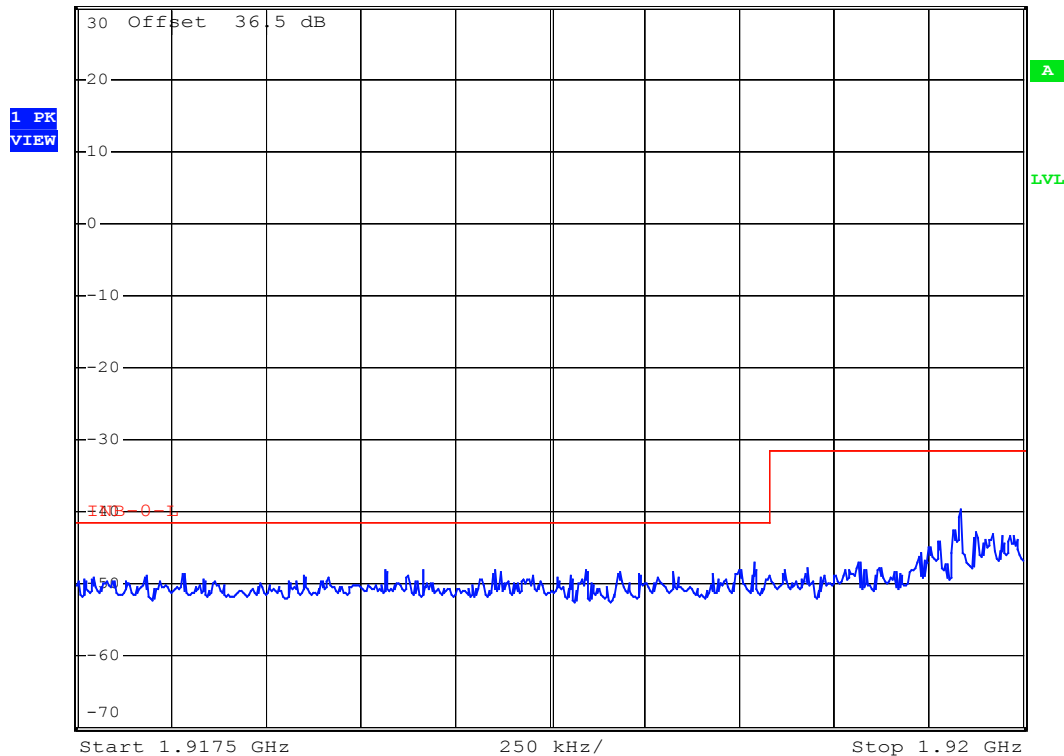

Date: 16.NOV.2009 15:57:38

b) CH F_HOut-of -band Unwanted Emission (above 1GHz): CH F_H**Model No.: A490**Operation Mode : TransmittingFundamental Frequency : 1928.448MHzTest Date : Nov. 17, 2009 Temperature : 23 °C Humidity : 65 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	Peak	Ave	Peak	Ave		Peak	Ave	Peak	Ave			
3857.200	53.9	---	53.4	---	-3.1	50.8	---	74.0	54.0	-3.2	78	1.6
5786.360	50.2	---	51.6	---	0.5	52.1	---	74.0	54.0	-1.9	76	1.7
7713.283	46.8	---	48.9	---	3.8	52.7	---	74.0	54.0	-1.3	58	1.7
9643.866	55.0	32.3	52.5	32.4	6.0	61.0	38.4	74.0	54.0	-13.0	82	1.5
11572.466	---	---	---	---	9.1	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “***” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Item “Margin” referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Model No.: A495Operation Mode : TransmittingFundamental Frequency : 1928.448MHzTest Date : Nov. 17, 2009 Temperature : 23 °C Humidity : 65 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	Peak	Ave	Peak	Ave		Peak	Ave	Peak	Ave			
3856.250	48.8	---	52.1	---	-3.1	49.0	---	74.0	54.0	-5.0	88	1.4
5786.380	50.3	---	49.8	---	0.5	50.8	---	74.0	54.0	-3.2	29	1.8
7712.430	46.5	---	47.0	---	3.8	50.8	---	74.0	54.0	-3.2	78	1.7
9643.967	55.5	32.2	57.5	32.5	6.0	63.5	38.5	74.0	54.0	-10.5	63	1.7
11572.092	---	---	---	---	9.1	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “***” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Item “Margin” referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Out-of-band Unwanted Emission: CH FH




* RBW 10 kHz
* VBW 30 kHz
SWT 25 ms

Ref 30 dBm

* Att 10 dB

1 PK
VIEW

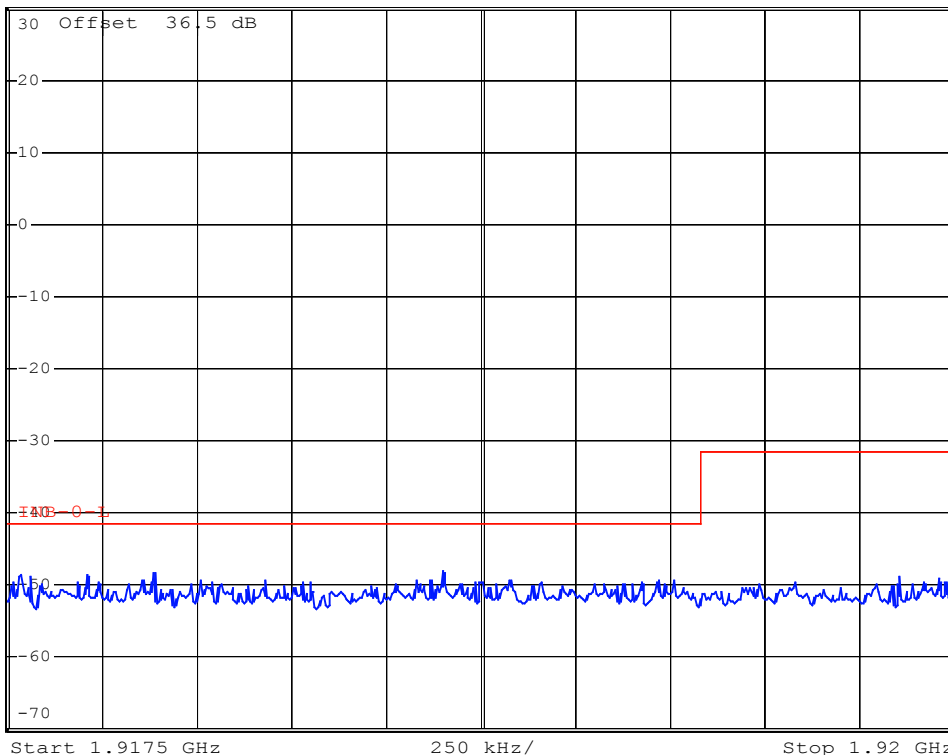

Date: 16.NOV.2009 16:46:30


Out-of-band Unwanted Emission: CH FH



* RBW 10 kHz
* VBW 30 kHz
SWT 25 ms

Ref 30 dBm

* Att 10 dB

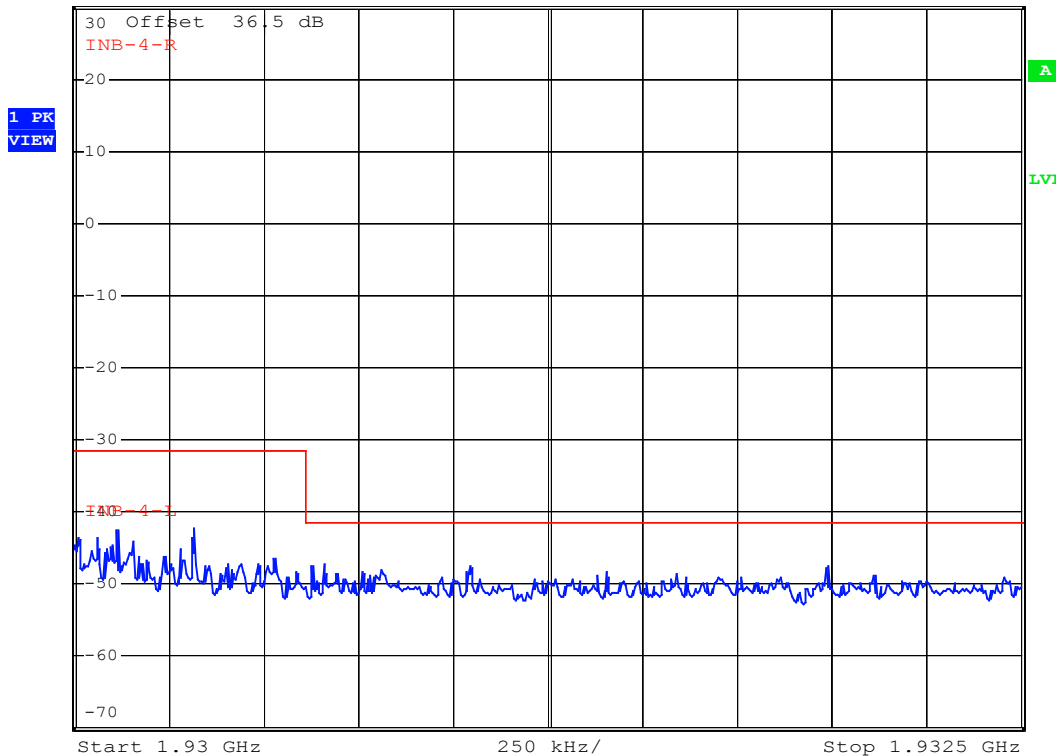

Date: 16.NOV.2009 16:45:55

6.13.4 Photos of Radiation Measuring Setup

Model No.: A490/ Mode: Base On Line



Model No.: A490/ Mode: Base Charging



Model No.: A495/ Mode: Base On Line



Model No.: A495/ Mode: Base Charging



6.14 Frame period and jitter

6.14.1 Standard Applicable

FCC 15.323(e)

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these subbands shall be 20 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per million (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

6.14.2 Measurement procedure


- Frame frequency stability ≤ 50 ppm
- TDMA frame frequency stability ≤ 10 ppm (That translates to frequency drift of 19.2 kHz/slot for 1920 MHz carrier)
- Frame jitter $\leq 25\mu\text{s}$

6.14.3 Test Results: Complies**Measurement Data**


Channel No.	Frequency (KHz/slot)		Jitter (us)	
	Drift	Limit	Result	Limit
F _L	2	19.2	-0.00	25
F _H	3	19.2	-0.00	25

Photos of worst-case display follow:


Frequency Drift

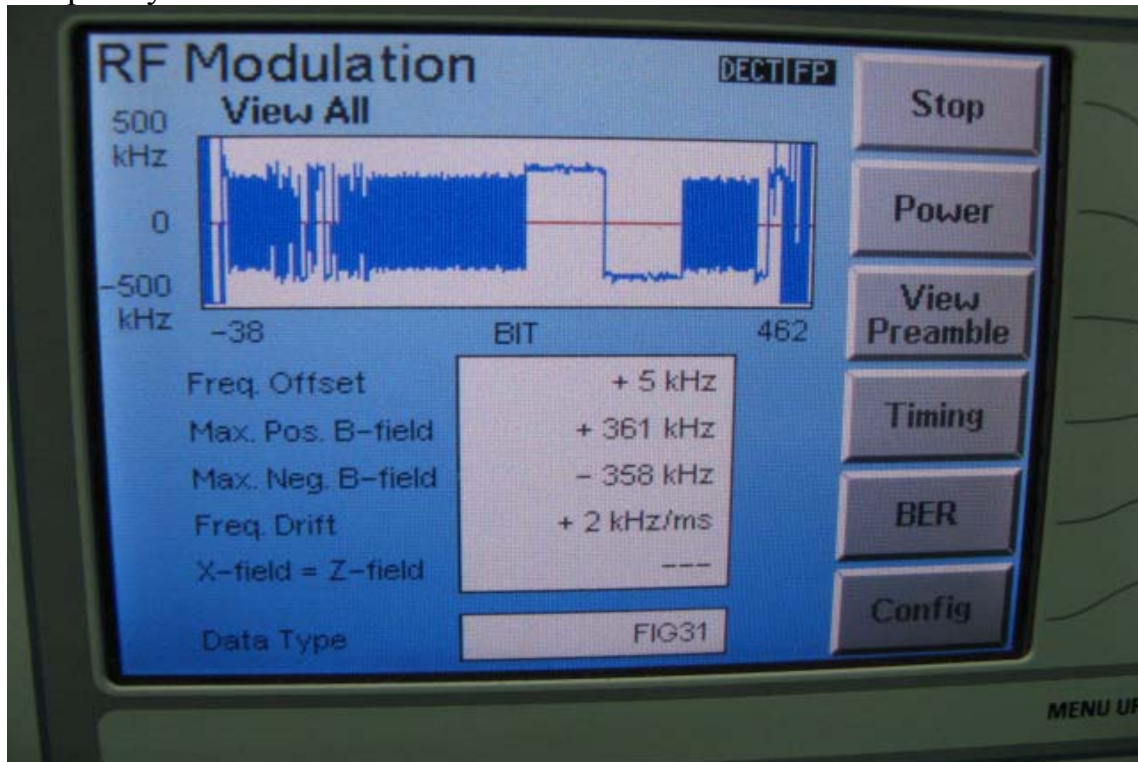


TDMA Frame Jitter

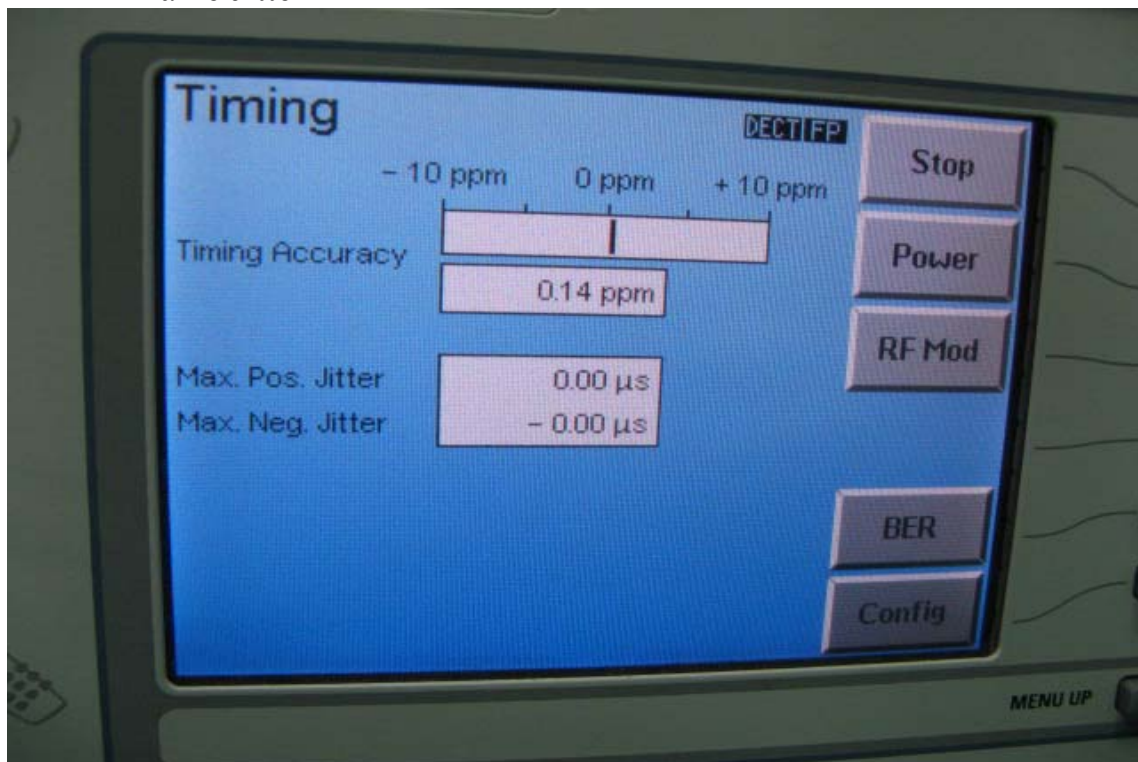

Frequency Drift

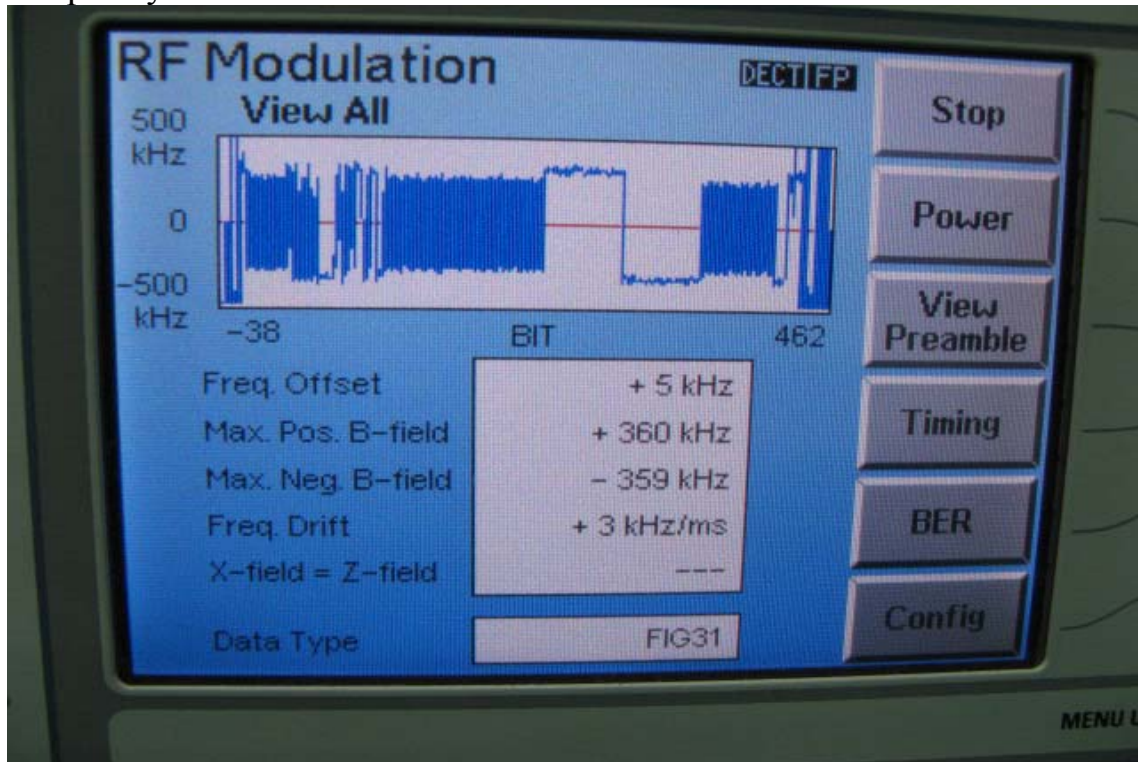

TDMA Frame Jitter

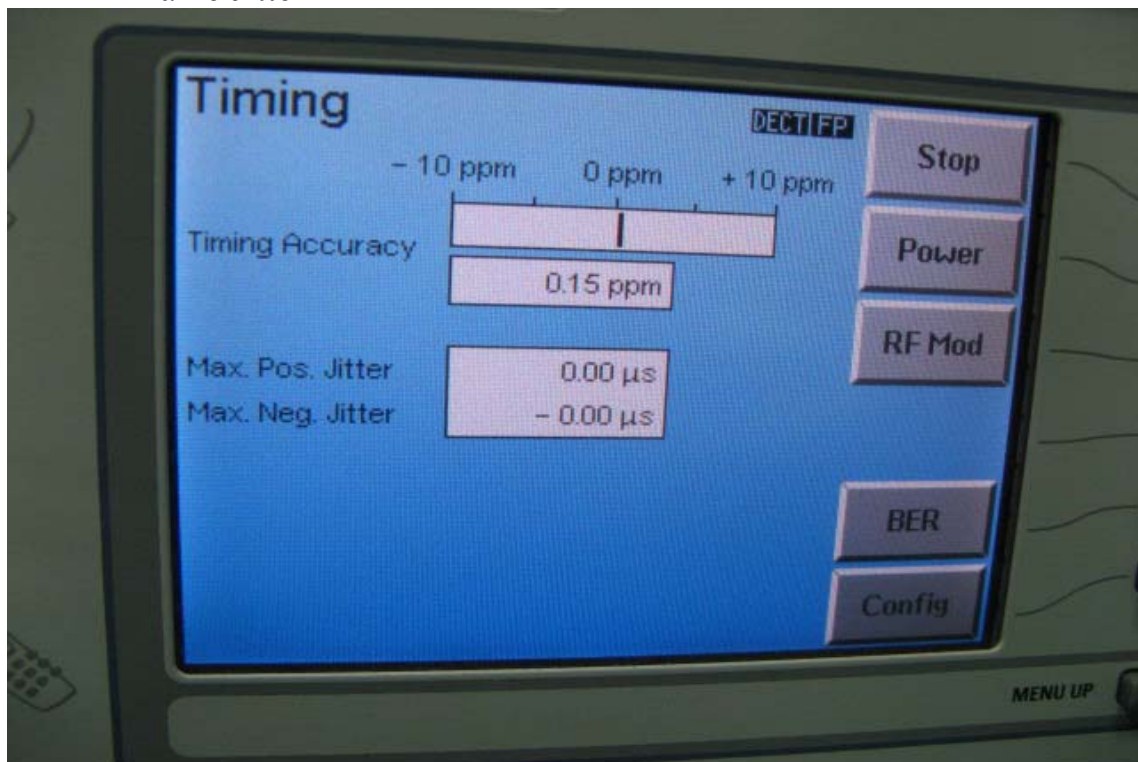

6.15 Carrier frequency stability

6.15.1 Standard Applicable

FCC 15.323(f)

The frequency stability of the carrier frequency of the intentional radiator shall be maintained within ± 10 ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20°C to $+50^{\circ}\text{C}$ degrees C at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20°C . For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

6.15.2 Measurement Requirement

- Carrier frequency stability ≤ 10 ppm over 1 hour or interval between channel access monitoring, whichever is shorter (That translates to frequency drift of 19.2 kHz for 1920 MHz carrier)
- Carrier frequency stability over -20°C to $+50^{\circ}\text{C}$ at normal supply voltage, and over 85% to 115% of rated supply voltage (voltage variation not required for battery operated device)

6.15.3 Test Results: Complies**Measurement Data****a) Carrier Frequency Stability with Supply Voltage**

Channel No.	Frequency Offset (KHz)			Limit (KHz)
	102V (85%)	120V (Normal)	138V (115%)	
F _L	3	3	3	±19.2
F _H	4	3	3	±19.2

b) Carrier Frequency Stability with Temperature and Time

Channel No.	Frequency Offset (KHz)			Limit (KHz)
	-20°C	20°C	50°C	
F _L	4	4	3	±19.2
F _H	3	4	3	±19.2

Test was conducted for duration longer than 1 hour. Photo of worst-case display follows:

