



**FCC 47 CFR PART 15 SUBPART C**

**TEST REPORT**

**For**

**2.4G Receiver**

**Model: LR255**

**Trade Name: AEE**

*Prepared for*

**SHENZHEN AEE TECHNOLOGY CO., LTD  
1/F., BLDG.B, TSINGHUA HI-TECH PARK, NORTHERN HI-TECH  
INDUSTRIAL PARK, NANSHAN DISTRICT, SHENZHEN, P.R.C**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.  
NO. 5, JINAO INDUSTRIAL PARK, NO. 35 JUKENG ROAD,  
DASHUIKENG VILLAGE, GUANLAN TOWN, BAOAN  
DISTRICT, SHENZHEN, CHINA**

**TEL: 86-755-28055000**

**FAX: 86-755-28055221**



---

***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>3</b>
<b>2. EUT DESCRIPTION .....</b>	<b>4</b>
<b>3. TEST METHODOLOGY .....</b>	<b>5</b>
3.1 EUT CONFIGURATION .....	5
3.2 EUT EXERCISE .....	5
3.3 GENERAL TEST PROCEDURES .....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS .....	6
3.5 DESCRIPTION OF TEST MODES .....	6
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>7</b>
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>8</b>
5.1 FACILITIES .....	8
5.2 EQUIPMENT .....	8
5.3 LABORATORY ACCREDITATIONS AND LISTING .....	8
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>9</b>
6.1 SETUP CONFIGURATION OF EUT .....	9
6.2 SUPPORT EQUIPMENT .....	9
<b>7. FCC PART 15.231 REQUIREMENTS.....</b>	<b>10</b>
7.1 20 DB BANDWIDTH .....	10
7.2 LIMIT OF TRANSMISSION TIME .....	12
7.3 DUTY CYCLE .....	14
7.4 RADIATED EMISSIONS .....	18
7.5 POWERLINE CONDUCTED EMISSIONS .....	23



## 1. TEST RESULT CERTIFICATION

**Applicant:** SHENZHEN AEE TECHNOLOGY CO., LTD  
1/F., BLDG.B, TSINGHUA HI-TECH PARK, NORTHERN  
HI-TECH INDUSTRIAL PARK, NANSHAN DISTRICT,  
SHENZHEN, P.R.C

**Equipment Under Test:** 2.4G Receiver

**Trade Name:** AEE

**Model:** LR255

**Date of Test:** August 24-September 04, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and Part 15.231.

The test results of this report relate only to the tested sample identified in this report.

*Approved by:*

*Tested By:* Henry Ding

**Harris Lai / General Manager**  
**COMPLIANCE CERTIFICATION**  
**SERVICES (SHENZHEN) INC.**

*Reviewed By:*

**Eric Wong / Assistant manager**  
**COMPLIANCE CERTIFICATION**  
**SERVICES (SHENZHEN) INC.**



## 2. EUT DESCRIPTION

<b>Product</b>	2.4G Receiver
<b>Trade Name</b>	AEE
<b>Model Number</b>	LR255
<b>Model Difference</b>	N/A
<b>Power Supply</b>	RX: DC6V powered by the battery or DC9V powered by the adapter
<b>Frequency Range</b>	915 MHz
<b>Antenna Designation</b>	Dipole Antenna

**Remark:** This submittal(s) (test report) is intended for FCC ID: TW4LR255 filing to comply with Section 15.207, 15.209 and 15.231 of the FCC Part 15, Subpart C Rules.



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4: 2003 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.231.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.

### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 3.5 DESCRIPTION OF TEST MODES

The EUT had been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and powerline conducted emission below 30MHz, which worst case was in normal link mode with charging only.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded



## **4. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at

No. 5, Jinao industrial park, No.35 Jukeng Road, Dashuikeng Village, Guanlan Town, Baoan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4: 2003: 2003 and CISPR Publication 22.

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5.3 LABORATORY ACCREDITATIONS AND LISTING**

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200577-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission.





## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	FCC ID	Series No.	Data Cable	Power Cord
1.	2.4G Receiver	AEE	LR255	TW4LR255	N/A	N/A	N/A
2.	Adapter	ORIENTAL HERO	OH-1048A09 01500U-UL	N/A	N/A	N/A	Unshielded 1.80m
3.	15" LCD Monitor	SKYWORTH	15LaBTX	DoC	15LaBTX- TT03383	Shielded 1.60m	Unshielded 1.80m

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 7. FCC PART 15.231 REQUIREMENTS

### 7.1 20 DB BANDWIDTH

#### LIMIT


The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
PSA Spectrum Analyzer	Agilent	E4446A	US44300399	02/08/2007

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### Test Configuration



#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The spectrum analyzer center frequency is set to the transmitter frequency. The RBW is set to 10 kHz and VBW is set 30kHz.

#### TEST RESULTS


*No non-compliance noted.*

#### Test Data

Frequency (MHz)	20 dB Bandwidth (kHz)	Limit (MHz)	Result
915.22	571.00	4.5761	PASS



## Test Plot

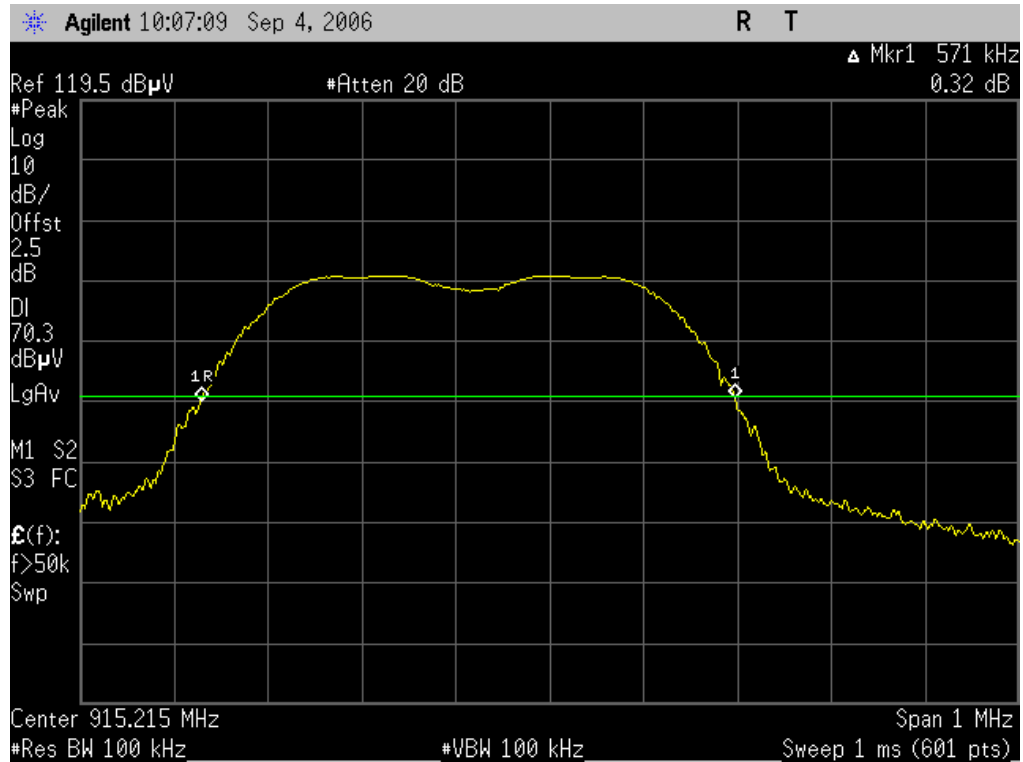



## 7.2 LIMIT OF TRANSMISSION TIME

### LIMIT


According to 15.231 (a)(1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
PSA Spectrum Analyzer	Agilent	E4446A	US44300399	02/08/2007

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The spectrum analyzer center frequency is set to the transmitter frequency. The RBW and VBW are set to 1MHz.

### TEST RESULTS


*No non-compliance noted*

### Test Data

Frequency (MHz)	Transmission time (ms)	Limit (Second)	Result
914.83	250.00	5.00	PASS



## Test Plot

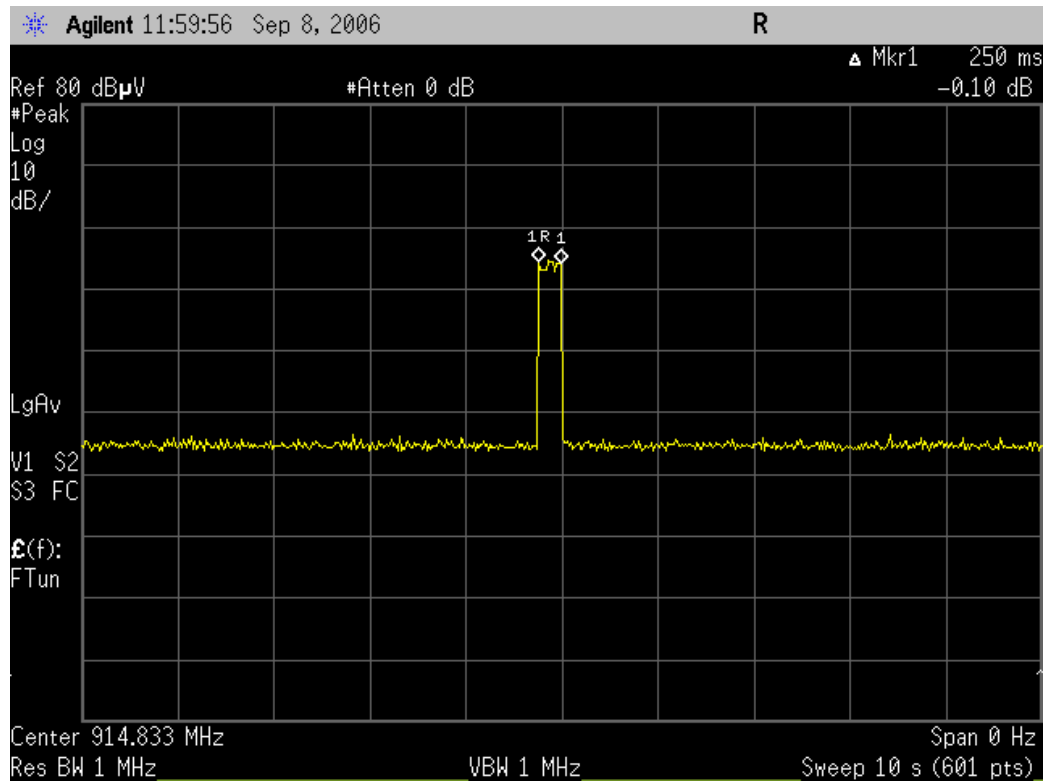



### 7.3 DUTY CYCLE

#### LIMIT


Nil (No dedicated limit specified in the Rules)

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
PSA Spectrum Analyzer	Agilent	E4446A	US44300399	02/08/2007

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### Test Configuration



#### TEST PROCEDURE



1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span = 0Hz, Adjust Sweep = 30s
5. Repeat above procedures until all frequency measured were complete.



#### TEST RESULTS

*No non-compliance noted*




## Test Plot

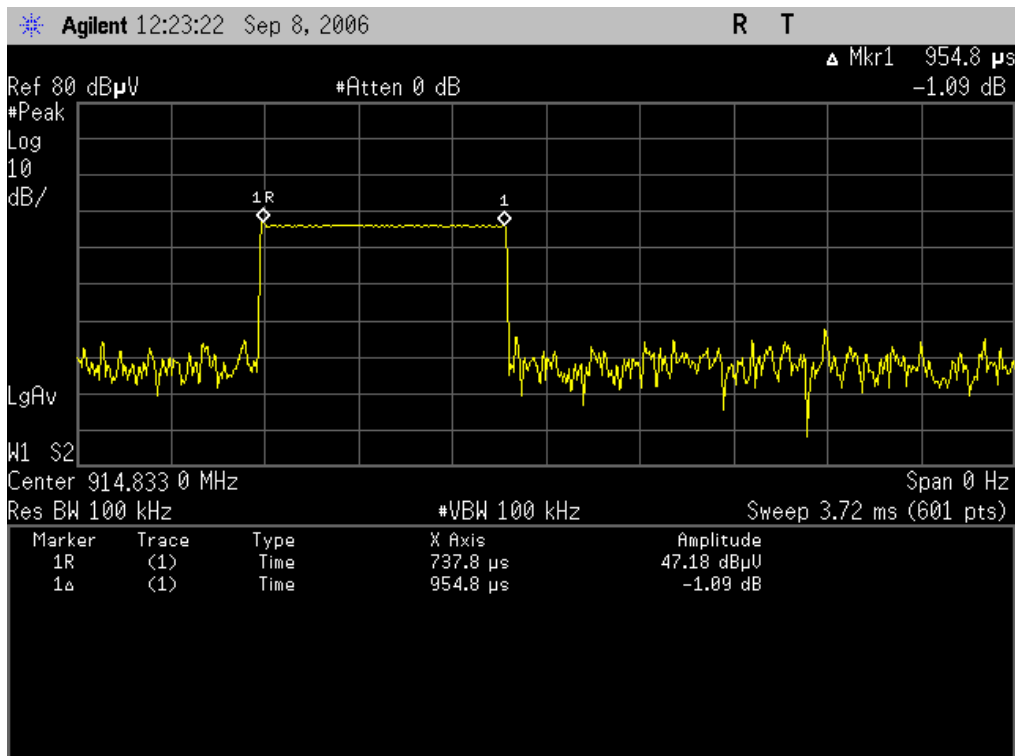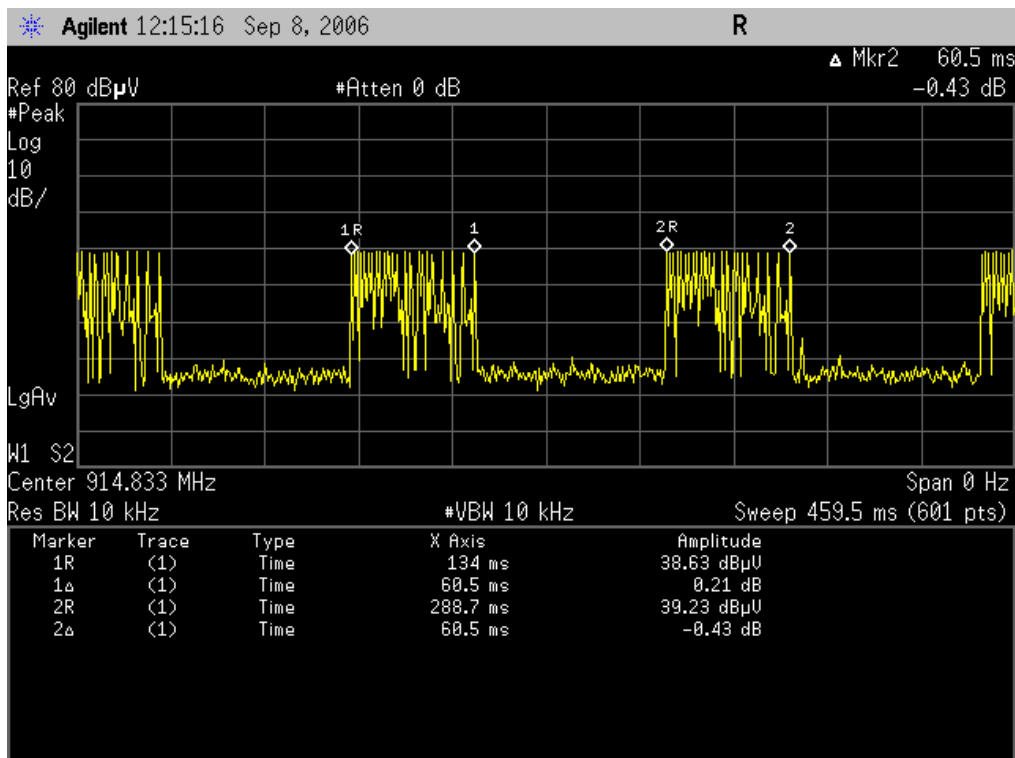

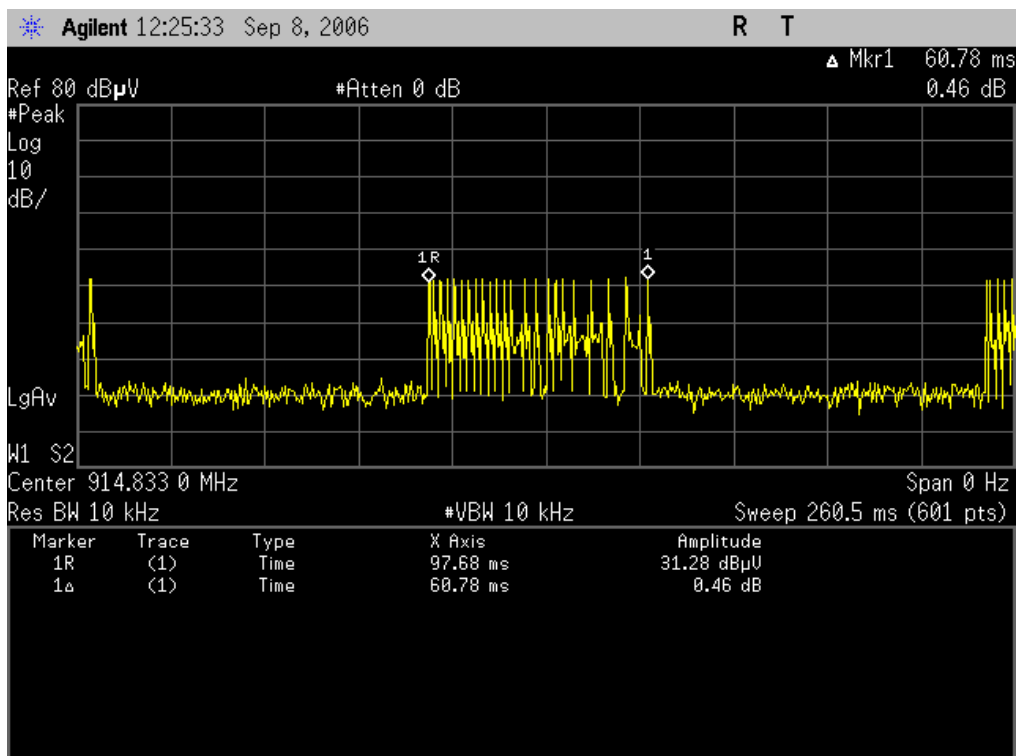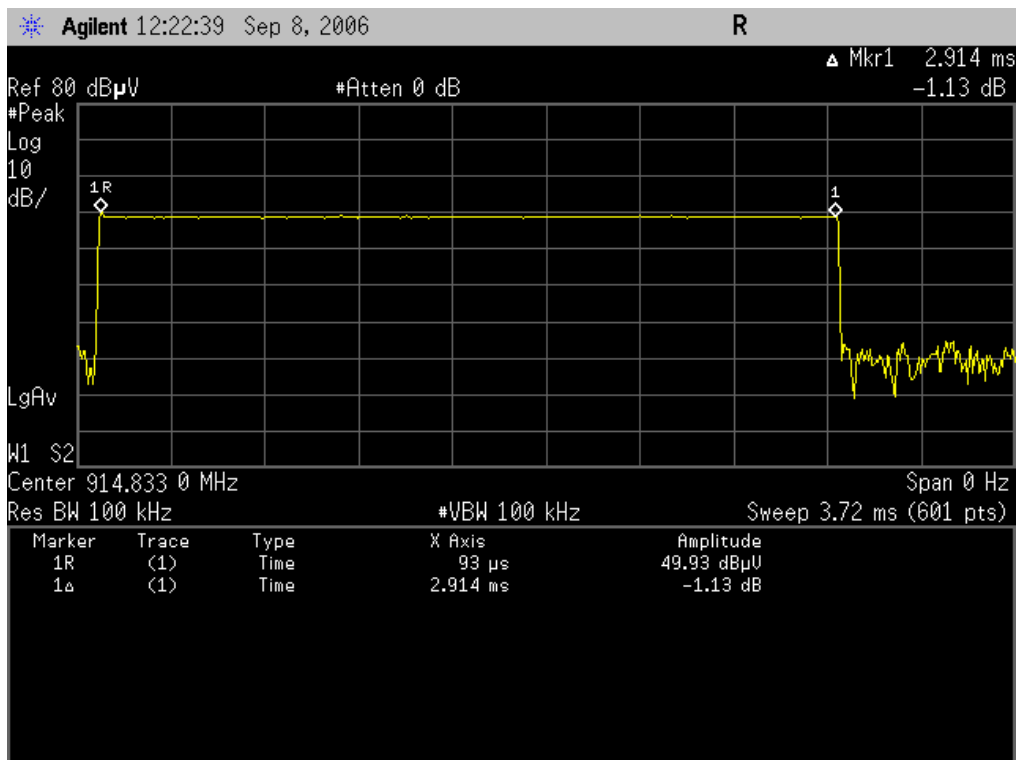



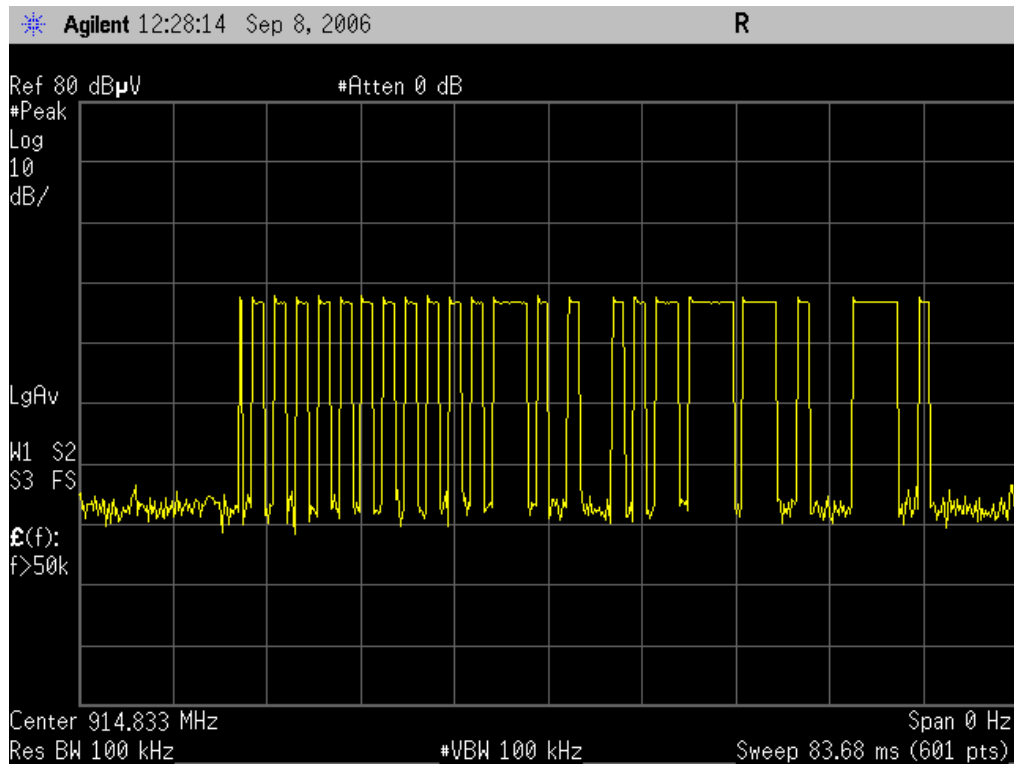



## 7.4 RADIATED EMISSIONS

### LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


## **MEASUREMENT EQUIPMENT USED**

966 RF CHAMBER 2				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
PSA Spectrum Analyzer	Agilent	E4446A	US44300399	02/08/2007
EMI Test Receiver	R&S	ESCI	1166.5950 03	01/13/2007
Pre-Amplifier	MITEQ	N/A	AFS42-00102650-42-10P-42	02/14/2007
Bilog Antenna	SCHWAZBECK	CBL6143	5082	06/09/2007
Turn Table	EMCO	2081-1.21	N/A	N.C.R
Antenna Tower	CT	N/A	N/A	N.C.R
Controller	CT	N/A	N/A	N.C.R
RF Comm. Test set	HP	8920B	US36142090	N.C.R
Site NSA	C&C	N/A	N/A	06/09/2007
Horn Antenna	TRC	N/A	N/A	03/04/2007


**Remark:** Each piece of equipment is scheduled for calibration once a year.

## **Test Configuration**

**Below 1 GHz**

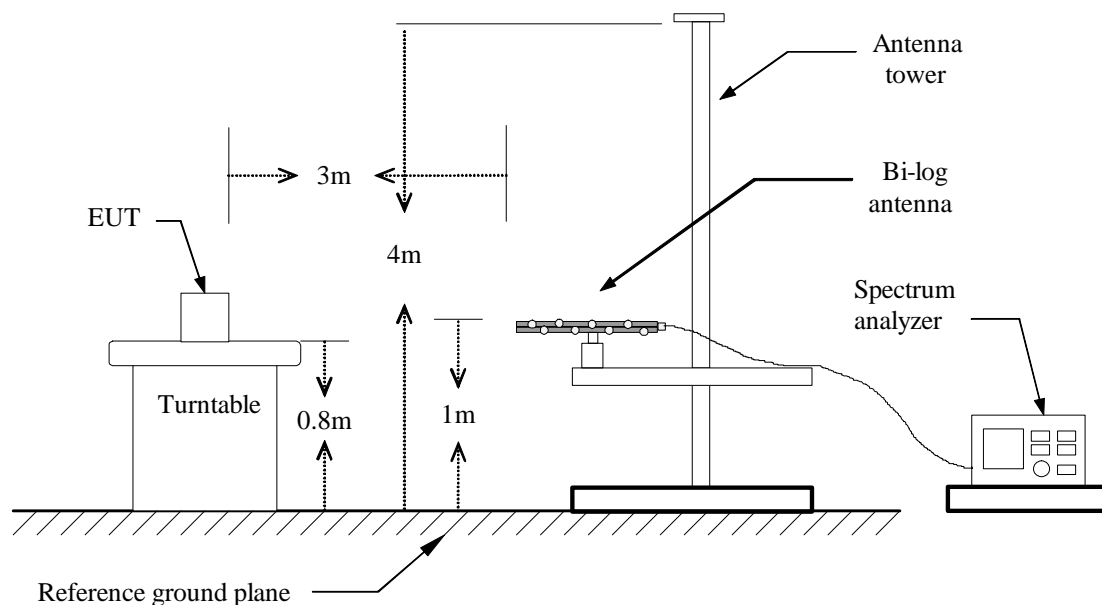

## Above 1 GHz

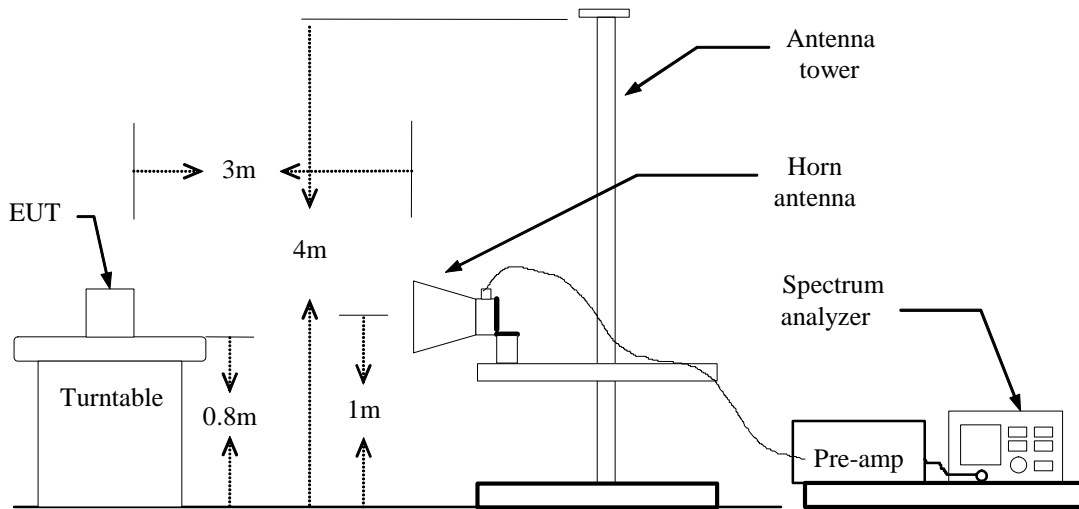

## TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Operation Mode:** TX**Test Date:** September 02, 2006**Temperature:** 23°C**Tested by:** Henry**Humidity:** 51 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
914.833	V	Peak	55.13	-5.47	49.66	81.93	-32.27
156.450	V	Peak	48.81	-7.79	41.02	43.50	-2.48
166.350	V	Peak	46.69	-5.92	40.77	43.50	-2.73
430.333	V	Peak	47.53	-4.08	43.45	46.00	-2.55
616.166	V	Peak	43.16	0.25	43.41	46.00	-2.59
655.833	V	Peak	41.66	0.29	41.95	46.00	-4.05
914.833	H	Peak	58.67	-0.01	58.66	81.93	-23.27
68.700	H	Peak	40.49	-2.55	37.94	40.00	-2.06
137.100	H	Peak	48.49	-7.10	41.39	43.50	-2.11
363.000	H	Peak	54.90	-12.49	42.41	46.00	-3.59
391.000	H	Peak	50.22	-7.63	42.59	46.00	-3.41
430.666	H	Peak	51.06	-7.20	43.86	46.00	-2.14

**Remark:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Above 1 GHz****Operation Mode:** TX**Test Date:** September 02, 2006**Temperature:** 23°C**Tested by:** Henry**Humidity:** 51% RH

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1986.66	V	59.07	---	-7.51	51.56	---	74.00	54.00	-2.44	Peak
N/A										
1986.66	H	56.62	---	-7.51	49.11	---	74.00	54.00	-4.89	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

## 7.5 POWERLINE CONDUCTED EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site G				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESCI EMI TEST RECEIV.ESCI	ROHDE&SCHWARZ	1166.5950 03	100088	02/08/2007
LISN	EMCO	3825/2	1371	02/08/2007
LISN	EMCO	3825/2	8901-1459	02/08/2007

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### Test Data

Operation Mode: TX+RX

Test Date: August 28, 2006

Temperature: 25°C

Tested by: Henry

Humidity: 55% RH

FREQ MHz	PEAK RAW dBuV	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.187	40.24	---	---	64.94	54.94	---	-14.70	L1
0.283	32.90	---	---	62.19	52.19	---	-19.29	L1
0.761	32.63	---	---	56.00	46.00	---	-13.37	L1
2.280	32.91	---	---	56.00	46.00	---	-13.09	L1
3.811	28.18	---	---	56.00	46.00	---	-17.82	L1
20.492	33.34	---	---	60.00	50.00	---	-16.66	L1
0.187	42.33	---	---	64.94	54.94	---	-12.61	L2
0.305	33.43	---	---	61.55	51.55	---	-18.12	L2
0.758	31.69	---	---	56.00	46.00	---	-14.31	L2
0.973	29.21	---	---	56.00	46.00	---	-16.79	L2
2.288	31.15	---	---	56.00	46.00	---	-14.85	L2
2.937	27.11	---	---	56.00	46.00	---	-18.89	L2

### Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPN between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



## **APPENDIX 1 PHOTOGRAPHS OF TEST SETUP**

### **LINE CONDUCTED EMISSION TEST**



## **RADIATED EMISSION TEST**

