



## **TEST REPORT**

**Date:** 2012-05-25

**Report No.:** 68.870.12.009.01F

**Applicant:** Shenzhen Gospell Smarthome Electronic Co., Ltd.  
5Floor/Block 2, Vision (SZ) Park, Hi-Tech Industrial Park,  
Shenzhen City, P.R China

**Description of Samples:** Model name: Wireless Inspection Camera with Color LCD monitor  
Brand name: ---  
Model no.: WIC5200, WIC5100  
FCCID: TW5GB8863

**Date Samples Received:** 2012-05-03

**Date Tested:** 2012-05-04 to 2012-05-24

**Investigation Requested:** FCC Part 15 Subpart C, Section 15.249

**Conclusions:** The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

**Remarks:** ----

Checked by:

Approved by:-

---

Ray Cheung  
Project Engineer  
Wireless & Telecom department

---

Jeff Pong  
Operation Manager  
Wireless & Telecom department



**CONTENT:**

Cover	Page 1 of 20	
Content	Page 2 of 20	
<b><u>1.0</u></b>	<b><u>General Details</u></b>	
1.1	Test Laboratory	Page 3 of 20
1.2	Applicant Details	Page 3 of 20
1.3	Equipment Under Test [EUT]	Page 4 of 20
1.4	Equipment Modification	Page 4 of 20
1.5	Related Submittal(s) Grants	Page 4 of 20
<b><u>2.0</u></b>	<b><u>Technical Details</u></b>	
2.1	Investigations Requested	Page 5 of 20
2.2	Test Standards and Results Summary	Page 5 of 20
<b><u>3.0</u></b>	<b><u>Test Methodology</u></b>	
3.1	Radiated Emission	Page 6 of 20
3.2	Field Strength Calculation	Page 6 of 20
3.3	Conducted Emission	Page 6 of 20
<b><u>4.0</u></b>	<b><u>Test Results</u></b>	
4.1	Field Strength of Fundamental and Harmonics	Page 7-9 of 20
4.2	Spurious Radiated Emission	Page 10-12 of 20
4.3	Out of Band Emissions	Page 13-14 of 20
4.4	Bandwidth Measurement	Page 15-17 of 20
4.5	Conducted Emission	Page 17-19 of 20
<b><u>5.0</u></b>	<b><u>List of Measurement Equipments</u></b>	Page 20 of 20
<b><u>Appendix A</u></b>		
Photos of Test Setup		
<b><u>Appendix B</u></b>		
External EUT Photos		
<b><u>Appendix C</u></b>		
Internal EUT Photos		



**1.0**    **General Details**

**1.1**    **Test Laboratory**

SEM Test Compliance Services Co., Ltd.  
EMC Laboratory registered by FCC with  
FCC Registration Number: 994117

Test By:

A handwritten signature in black ink that reads 'Susan Su'.

---

Susan Su

**1.2**    **Applicant Details**  
**Applicant**

**Shenzhen Gospell Smarthome Electronic Co., Ltd.**  
5Floor/Block 2, Vision (SZ) Park, Hi-Tech Industrial Park,  
Shenzhen City, P.R China

**Manufacturer**

**GOSPELL SMARTHOME ELECTRONIC CO.,LTD.**  
F/12, F518 Idea Land, Baoyuan Road, Baoan Central  
Area, Shenzhen City, P.R China



### 1.3 Equipment Under Test [EUT]

#### Description of EUT

Model Name:	Wireless Inspection Camera with Color LCD monitor
Brand Name:	N/A
Model Number:	WIC5200, WIC5100
FCCID:	TW5GB8863
Rating:	DC 5V, 1500mA
Antenna Type:	Omni-directional Antenna
Operated Frequency:	2468 MHz
No. of Channel:	1
Accessories and Auxiliary Equipment:	Color LCD Monitor
EUT Exercising Software:	None

#### General Operation of EUT

The Equipment Under Test (EUT) is a transmitter of Wireless Inspection Camera with Color LCD monitor operated at 2.4GHz.

As per Client Declaration, WIC5200 and WIC5100 Utilize the identical circuit design, PCB layout, shielding and interface, only the associated receiver are different. So we use WIC5200 as a representative model to perform all testing.

### 1.4 Equipment Modification

No modification was made to the tested unit by TÜV SÜD Great China.

### 1.5 Related Submittal(s) Grants

This is a single application of certification for this transmitter.



## 2.0 Technical Details

### 2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4: 2003.

### 2.2 Test Standards and Results Summary Tables

EMISSION Results Summary				
Test Condition	FCC Test Requirement	Test Result		
		Pass	Failed	N/A
Field Strength of Fundamental and Harmonics	Part 15.249 (a),(e)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Spurious Radiated Emission	Part 15.249 (d) Part 15.209 Part 15.205	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Out of Band Emissions	Part 15.249 (d)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Bandwidth Measurement	Part 15.215 (c)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conducted Emission	Part 15.207	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable



### **3.0 Test Methodology**

#### **3.1 Radiated Emission**

The sample was placed 0.8m above the ground plane on a standard emission test site \*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

#### **3.2 Field Strength Calculation**

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$\begin{aligned} \text{FS} &= \text{R} + \text{System Factor} \\ \text{System Factor} &= \text{AF} + \text{CF} + \text{FA} - \text{PA} \end{aligned}$$

Where FS = Net Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer / Test Receiver in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.

FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

#### **3.3 Conducted Emissions**

The EUT was placed on a non-metallic table 0.8m above the horizontal metal reference place and 0.4m from a vertical ground plane which is connected to the horizontal metal ground plane. Meanwhile, the AC main of EUT was connected to the distance of 0.8m line impedance stabilization network (LISN) during measurement.


Initial measurements were performed in quasi-peak and average detection modes by the test receiver, any emissions recorded within 30dB of the relevant limit lines were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

## 4.0 Test Results

### 4.1 Field Strength of Fundamental and Harmonics

Test Requirement:	FCC part 15 section 15.249(a)(e)
Test Method:	ANSI C63.4:2003
Test Date:	2012-05-15
Mode of Operation:	Transmitting mode.
Detector Function:	Quasi-peak (Below 1000 MHz) Average and Peak (Above 1000 MHz)
Measurement BW:	120 kHz (Below 1000 MHz) 1 MHz (Above 1000 MHz)

#### **Test Setup:**

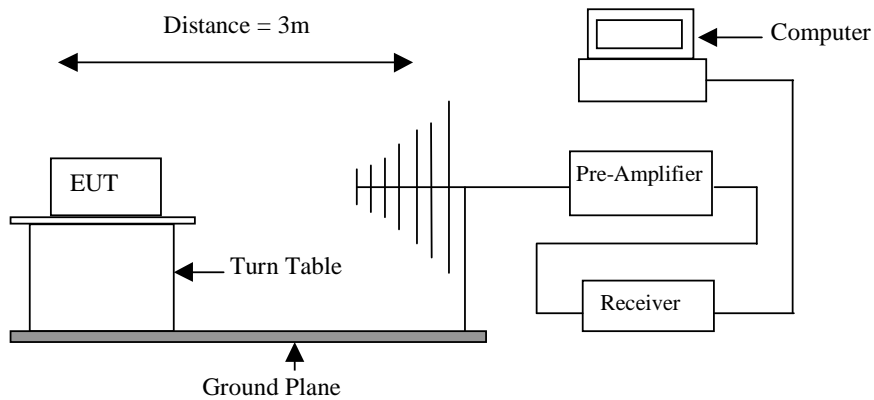



Results: PASS

Field Strength of Fundamental and Harmonics								
Value	Emissions Frequency MHz	E-Field Polarity	Reading dBμV/m	System Factor dB	Field Strength at 3m dBμV/m	Limit dBμV/m	Delta to Limit dBμV/m	Remarks
PK	2468.00	V	97.38	-11.77	85.61	114.00	-28.39	Fund.
AV	2468.00	V	96.40	-11.77	84.64	94.00	-9.36	Fund.
PK	2468.00	H	98.00	-11.77	86.23	114.00	-27.77	Fund.
AV	2468.00	H	97.14	-11.77	85.37	94.00	-8.63	Fund.
PK	7432.91	V	51.32	2.00	53.32	74.00	-20.68	Harmonic
AV	8891.72		35.43	3.78	39.21	54.00	-14.79	Harmonic
PK	15310.07	V	45.23	8.15	53.38	74.00	-20.62	Harmonic
AV	15310.07		33.01	8.15	41.16	54.00	-12.84	Harmonic
PK	7432.91	H	50.07	2.00	52.07	74.00	-21.93	Harmonic
AV	8891.72		35.44	3.78	39.22	54.00	-14.78	Harmonic
PK	15310.07	H	45.84	8.15	53.99	74.00	-20.01	Harmonic
AV	18000.00		43.23	14.50	57.73	54.00	3.73	Harmonic

Remark : - ( \* ) Radiated emissions which fall in the restricted bands as defined in Section 15.205(a).

- Calculated measurement uncertainty:  $\pm 5.0\text{dB}$




**Limits of Field Strength for Fundamental and Harmonics Frequency [ Section 15.249 (a) ]:**

Fundamental Frequency [MHz]	Field Strength of Fundamental		Field Strength of Harmonics	
	[mV/m]	[dB $\mu$ V/m]	[ $\mu$ V/m]	[dB $\mu$ V/m]
2400 – 2483.5	50	94	500	54

Compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector.

**Limit Requirement under Section 15.249 (e) :**

According to section 15.249 (e), for frequencies above 1000MHz, the above field strength limits is based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

**Limit for Radiated Emission [ Section 15.209 ]:**

Frequency (MHz)	Field Strength [ $\mu$ V/m]	Field Strength [dB $\mu$ V/m]
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0


Radiated emissions, which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209.

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### 4.2 Spurious Radiated Emission

Test Requirement:	FCC part 15 section 15.249(d), 15.209
Test Method:	ANSI C63.4:2003
Test Date:	2012-05-15
Mode of Operation:	Transmitting Mode
Detector Function:	Quasi-peak (Below 1000 MHz) Average and Peak (Above 1000 MHz)
Measurement BW:	120 kHz (Below 1000 MHz) 1 MHz (Above 1000 MHz)

##### Test Setup:

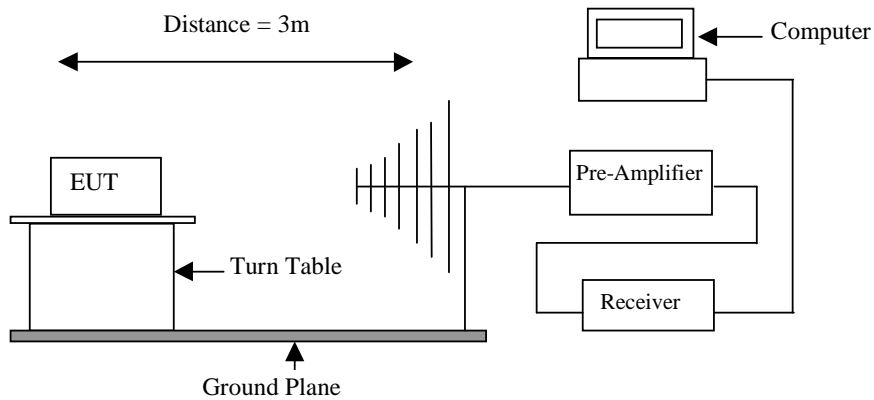



Results: PASS

Spurious Radiated Emissions								
Channel	Value	Emissions Frequency	E-Field Polarity	Reading	System Factor	Field Strength at 3m	Limit	Delta to Limit
		MHz		dB $\mu$ V/m	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
1	QP	36.00	V	28.00	8.22	36.22	40.00	-3.78
1	QP	42.90	V	26.59	8.01	34.60	40.00	-5.40
1	QP	100.93	V	14.54	6.05	20.59	43.50	-22.91
1	QP	239.15	V	17.14	6.21	23.35	46.00	-22.65
1	QP	396.24	V	15.53	9.97	25.50	46.00	-20.50
1	QP	893.86	V	17.41	16.75	34.16	46.00	-11.84
1	QP	37.81	H	26.00	8.51	34.51	40.00	-5.49
1	QP	42.90	H	23.82	8.01	31.83	40.00	-8.17
1	QP	102.36	H	14.55	5.91	20.46	43.50	-23.04
1	QP	364.26	H	15.41	9.26	24.67	46.00	-21.33
1	QP	734.49	H	15.96	15.18	31.14	46.00	-14.86
1	QP	863.06	H	16.02	16.30	32.32	46.00	-13.68

Note: - No further spurious emissions found between 30MHz and lowest internal used / generated frequency.  
 - Result data graph is shown at the next pages for reference.

Remark : - ( \* ) Radiated emissions which fall in the restricted bands as defined in Section 15.205(a).  
 - Calculated measurement uncertainty:  $\pm 5.0$ dB.

#### Limit of Outside of the Specified Bands [ Section 15.249 (d) ]

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lesser attenuation

#### Limit for Radiated Emission [ Section 15.209 ]:


Frequency (MHz)	Field Strength [ $\mu$ V/m]	Field Strength [dB $\mu$ V/m]
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

Radiated emissions, which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209.

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.




**(Vertical)**

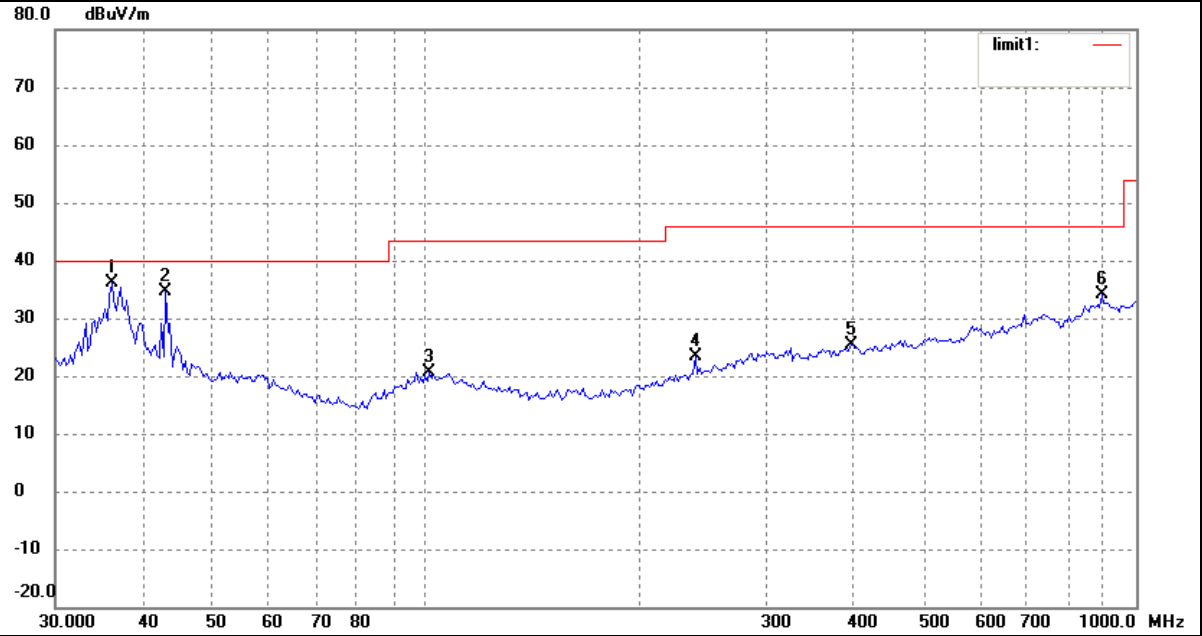

Remark: Only background noise was measured from 1GHz-10GHz except about operating frequency.

**(Horizontal)**

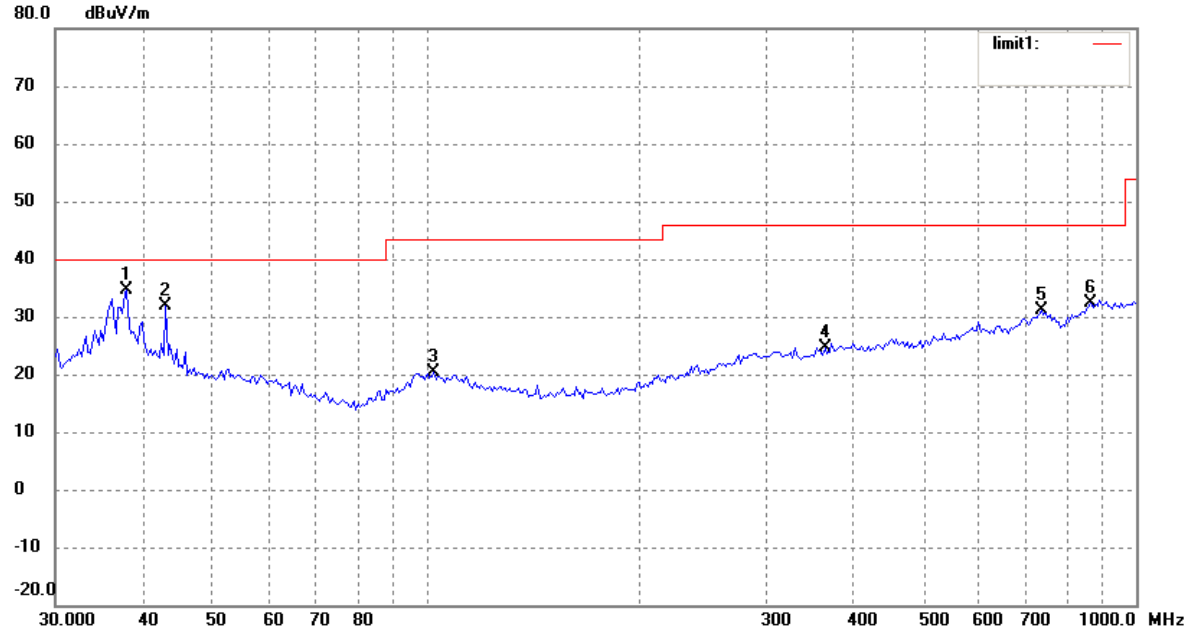

Remark: Only background noise was measured from 1GHz-10GHz except about operating frequency.



#### 4.3 Out of Band Emissions

Test Requirement:	FCC part 15 section 15.249 (d)
Test Method:	ANSI C63.4:2003
Test Date:	2012-05-22
Mode of Operation:	Transmitting mode.
Detector Function:	Peak

#### Results: PASS

Refer to the data graph, the lower and higher edge of the specified frequency bands fulfill the general radiated emission limits in section 15.209. Therefore, the EUT meets the requirement of section 15.249 (d).


#### Limit for Out of Band Emissions [ Section 15.249 (d) ]

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lesser attenuation.


**Test Result:** Result data graph is shown at the next pages for reference.



Lower edge

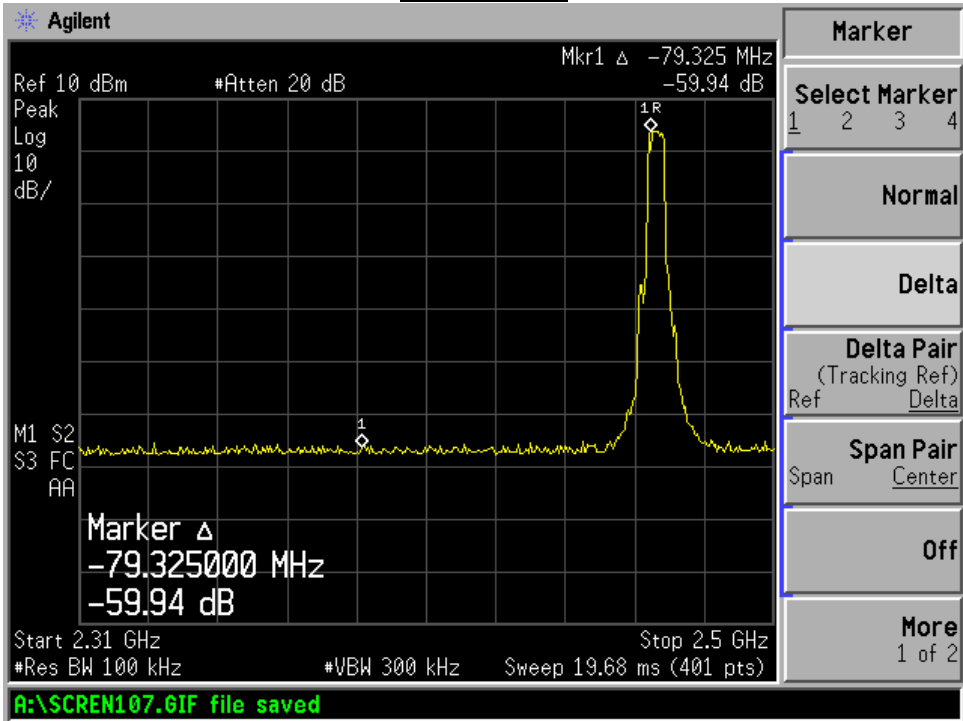

Higher edge

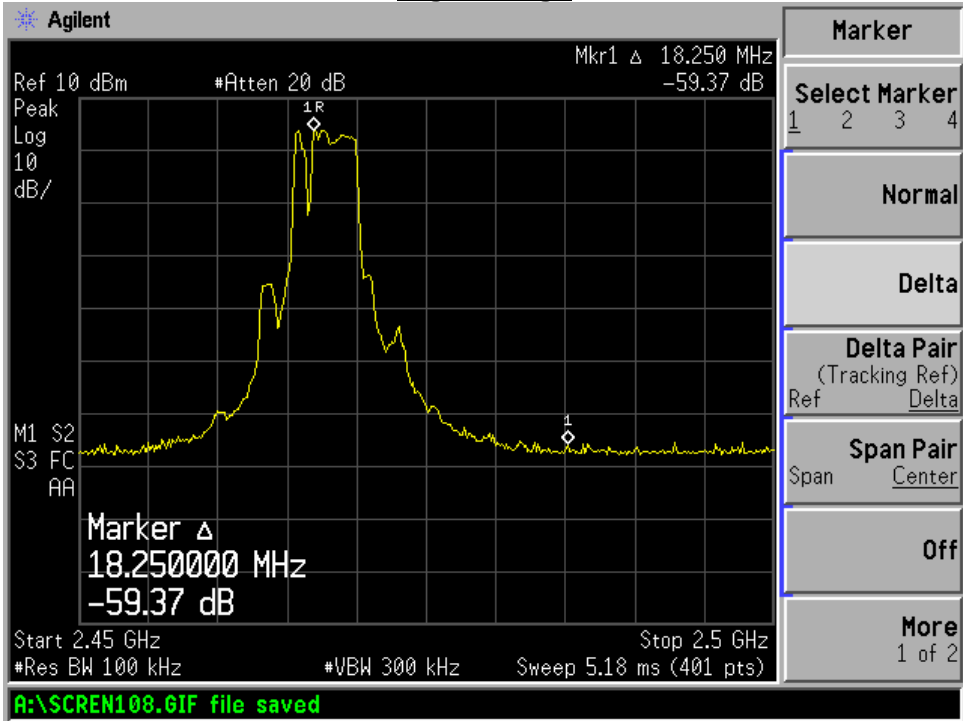



#### 4.4 Bandwidth Measurement

Test Requirement:	FCC part 15 section 15.215 (c)
Test Method:	ANSI C63.4:2003
Test Date:	2012-05-22
Mode of Operation:	Transmitting mode.
Detector Function:	Peak


#### Results: PASS

Refer to the data graph, the 20dB points of Channel 1, is 12.010MHz. Channel 1 within the operation bandwidth when equipment is operated. Therefore, the EUT meets the requirement of section 15.215(c).

#### Limit for Bandwidth [ Section 15.215 (c) ]

The 20dB bandwidth of the emission shall be within the frequency band designated in the rule section under which the equipment is operated.

**Test Result:** Result data graph is shown at the next pages for reference.

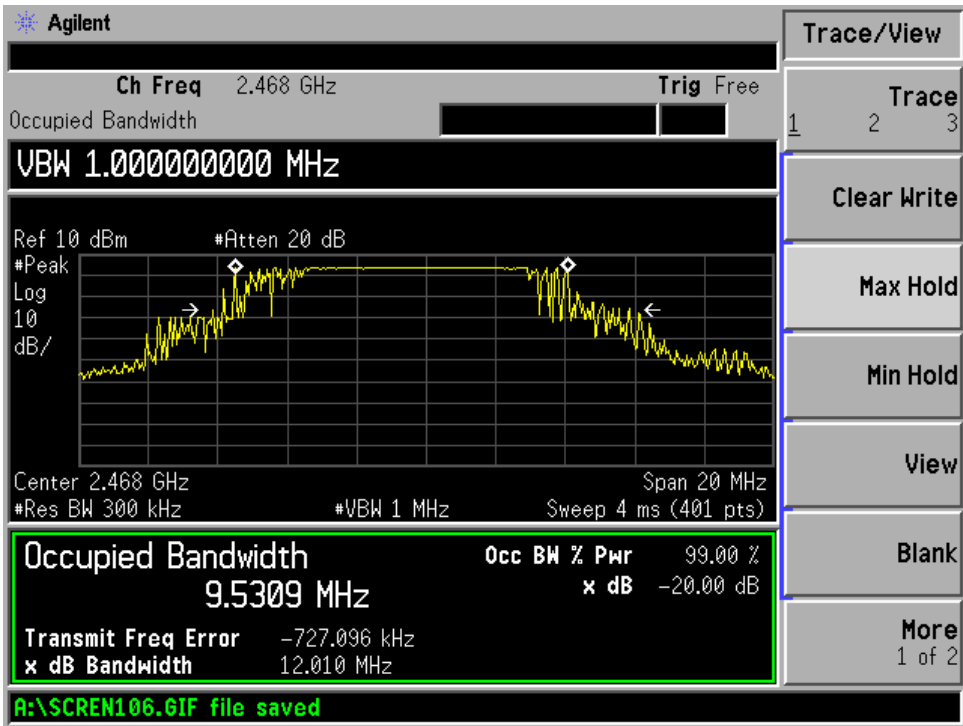




#### 4.5 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC part 15 Section 15.207 Class B
Test Method:	ANSI C63.4:2003
Test Date:	2012-05-15
Mode of Operation:	Transmitting and Charging for normal operate
Detector Function:	Quasi-peak, average
Measurement BW:	9 kHz

##### Test Setup:

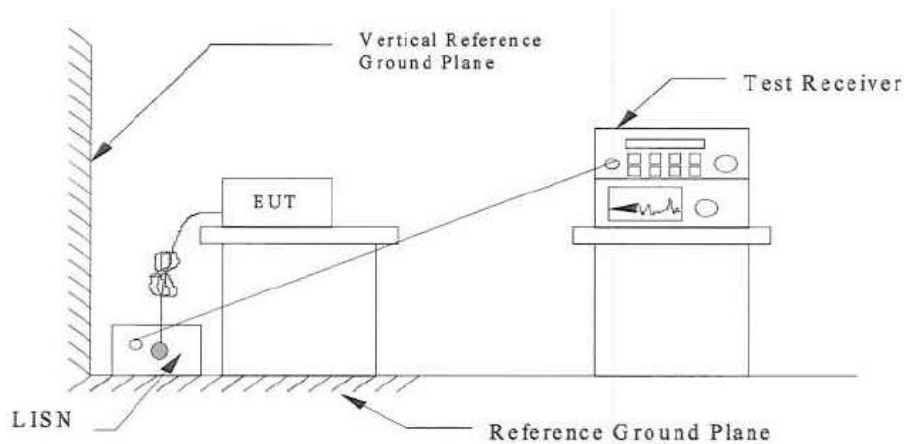



Results: PASS

Conducted Emission					
Frequency (MHz)	Detector (QP/AV)	Phase	Result (dBμV)	Limit (dBμV)	Margin
0.158	QP	L	56.47	65.55	-9.08
0.170	AV	L	49.91	54.95	-5.04
0.646	AV	L	31.81	46.00	-14.19
0.658	QP	L	41.74	56.00	-14.26
2.446	AV	L	26.42	46.00	-19.58
2.518	QP	L	37.46	56.00	-18.54
0.158	QP	N	58.08	65.55	-7.47
0.538	AV	N	43.34	46.00	-2.66
0.614	QP	N	42.29	56.00	-13.71
0.634	AV	N	38.36	46.00	-7.64
2.382	AV	N	36.72	46.00	-9.28
2.406	QP	N	42.65	56.00	-13.35

Note : - The worst case result data graph is attached at the next pages for reference.

Remark: - The EUT is connected to AC/DC Adaptor during testing.



- Calculated measurement uncertainty:  $\pm 2.8$ dB

#### Limits for Conducted Emission [ Section 15.207]:

Frequency Range [MHz]	Quasi-Peak Limit [dBμV]	Average Limit [dBμV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

\* Decreases with the logarithm of the frequency.

### Conducted Emissions Result

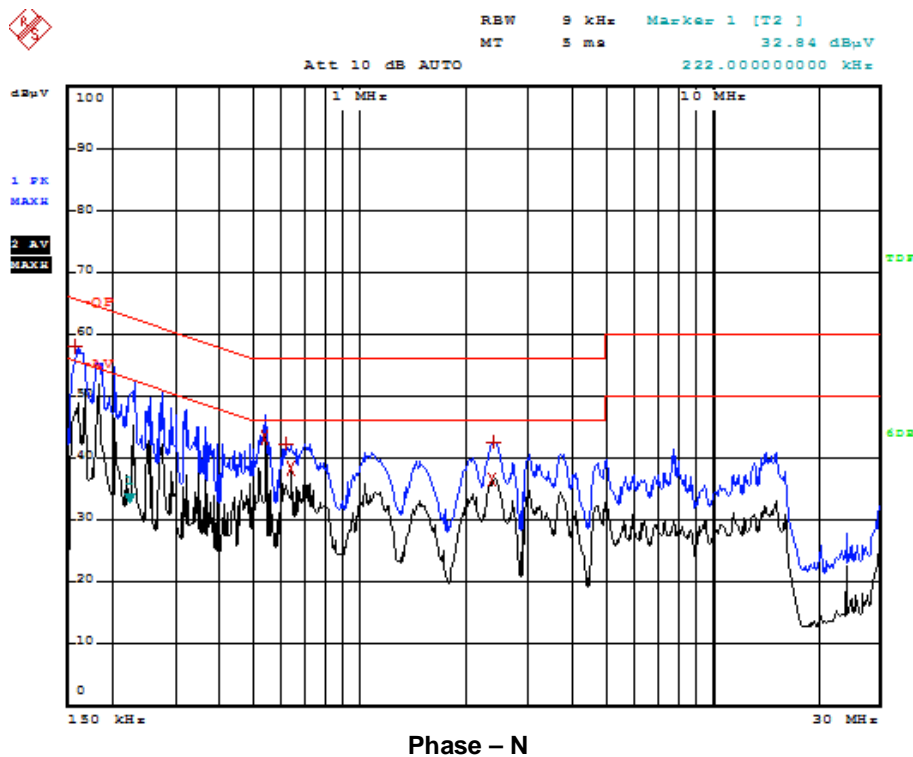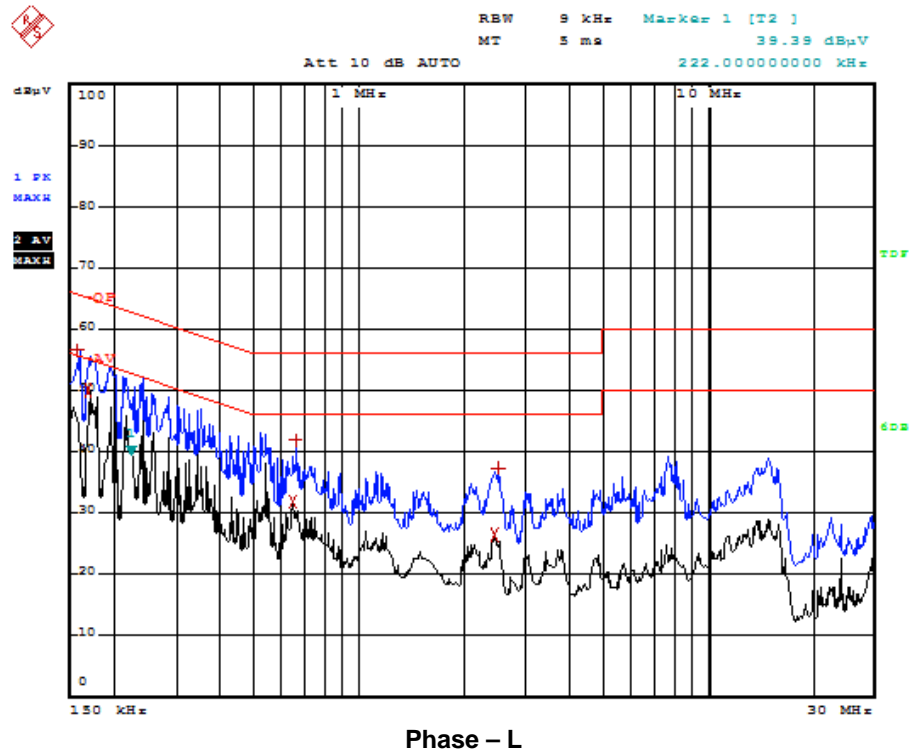



## 5.0 List of Measurement Equipment

### Radiated Emission and Out of Band Emissions

Description	Manufacturer	Model no.	Serial no.	CAL due
Test Receiver	Rohde & Schwarz	ESU8	100141	2013.03.27
Active Loop Antenna	EMCO	6502	9107-2651	2013.03.27
Biconical Antenna	Rohde & Schwarz	HK116	100242	2013.03.27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2013.02.24
Horn Antenna	ETS	3117	00086197	2013.02.24
Spectrum Analyzer	Rohde & Schwarz	FS300	101335	2013.03.27
DC Regulator Power Supply	Manson	NP-9625	330601321	2013.03.27
Bench-top-type Temperature Chamber	ESPEC	SU-641	92006336	2013.03.27
True RMS Multimeter	Fluke	189	93050006	2013.03.27

### Conducted Emission

Description	Manufacturer	Model no.	Serial no.	CAL due
Rohde & Schwarz	EMI Test Receiver	ESPI	101611	2013.03.27
Schwarz beck	L.I.S.N	NSLK8126	8126-224	2013.03.27
Rohde & Schwarz	Pulse Limiter	ESH3-Z2	100911	2013.03.27
EMCO	AMN	3825/2	11967C	2013.03.27
FCC	Current Probe	F-33-4	091684	2013.03.27

Remarks:

CM Corrective Maintenance

N/A Not Applicable or Not Available