



NVLAP LAB CODE 200707-0



FCC PART 15.247

MEASUREMENT AND TEST REPORT

For

Shenzhen Gospell Smarthome Electronic Co., Ltd

5Floor/Block 2, Vision (SZ) Park, Hi-Tech Industrial Park,
Shenzhen, P.R.of China

FCC ID: TW5GD8209

This Report Concerns: <input checked="" type="checkbox"/> Original Report		Equipment Type: Digital 2.4GHz Wireless Baby Monitor
Test Engineer:	Jim Li <i>Jim Li</i>	
Report No.:	RSZ08061605	
Test Date:	2008-06-16 to 2008-07-28	
Report Date:	2008-07-23	
Reviewed By:	EMC Manager: Green Xu <i>Green Xu</i>	
Prepared By:	Bay Area Compliant Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Shenzhen) This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EXTERNAL I/O CABLE.....	6
CONFIGURATION OF TEST SETUP	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
§15.247 (i) and §1.1307(b) (1) - MAXIMUM PERMISSIBLE EXPOSURE.....	9
TEST DATA	9
CFR47 §15.203 - ANTENNA REQUIREMENT.....	10
STANDARD APPLICABLE	10
ANTENNA CONNECTOR CONSTRUCTION	10
§15.207 (a) - CONDUCTED EMISSIONS.....	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE	12
TEST RESULTS SUMMARY	12
TEST DATA	13
PLOT(S) OF TEST DATA	13
CFR47 §15.205, §15.209, §15.247 - RADIATED EMISSIONS.....	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY	16
EUT SETUP.....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	18
TEST DATA	18
CFR47 §15.247(a) (1)-CHANNEL SEPARATION TEST	21
APPLICABLE STANDARD	21
TEST EQUIPMENT LIST AND DETAILS.....	21

TEST PROCEDURE	21
TEST DATA	21
CFR47 §15.247(a) (1) – 20dB BANDWIDTH TESTING.....	26
APPLICABLE STANDARD	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST PROCEDURE	26
TEST DATA	26
CFR47 §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	30
APPLICABLE STANDARD	30
TEST EQUIPMENT LIST AND DETAILS.....	30
TEST PROCEDURE	30
TEST DATA	30
CFR47 §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....	32
APPLICABLE STANDARD	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST PROCEDURE	32
TEST DATA	32
CFR47 §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	37
APPLICABLE STANDARD	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST PROCEDURE	37
TEST DATA	37
CFR47 §15.247(d) - BAND EDGES TESTING	42
APPLICABLE STANDARD	42
TEST EQUIPMENT LIST AND DETAILS.....	42
TEST PROCEDURE	42
TEST DATA	43

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Shenzhen Gospell Smarthome Electronic Co.,Ltd*'s product, model number: *GD8209* or the "EUT" as referred to in this report is a *Digital 2.4GHz Wireless baby monitor*, which measures approximately: 86 cm L x 48 cm W x 135 cm H, rated input voltage: 8VDC from adapter.

Adapter Information:

Model: GP006DE;

Input: 100-240V~ 50Hz 0.15A;

Output: 8V --- 500mA 4VA LPS

** All measurement and test data in this report was gathered from production sample serial number: 0806034 (Assigned by BACL, Shenzhen). The EUT was received on 2008-06-16.*

Objective

This Type approval report is prepared on behalf of *Shenzhen Gospell Smarthome Electronic Co.,Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliant Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliant Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliant Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in Compliant with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliant Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).


Equipment Modifications

No modifications were made to the EUT.


External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded Detachable DC Cable	1.7	EUT	Adapter

Configuration of Test Setup

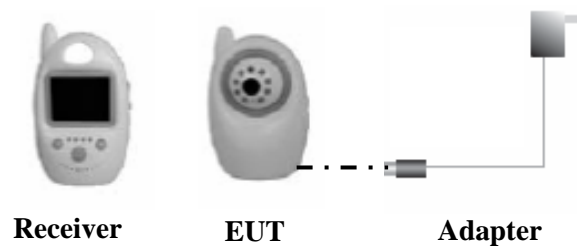

Block Diagram of Test Setup

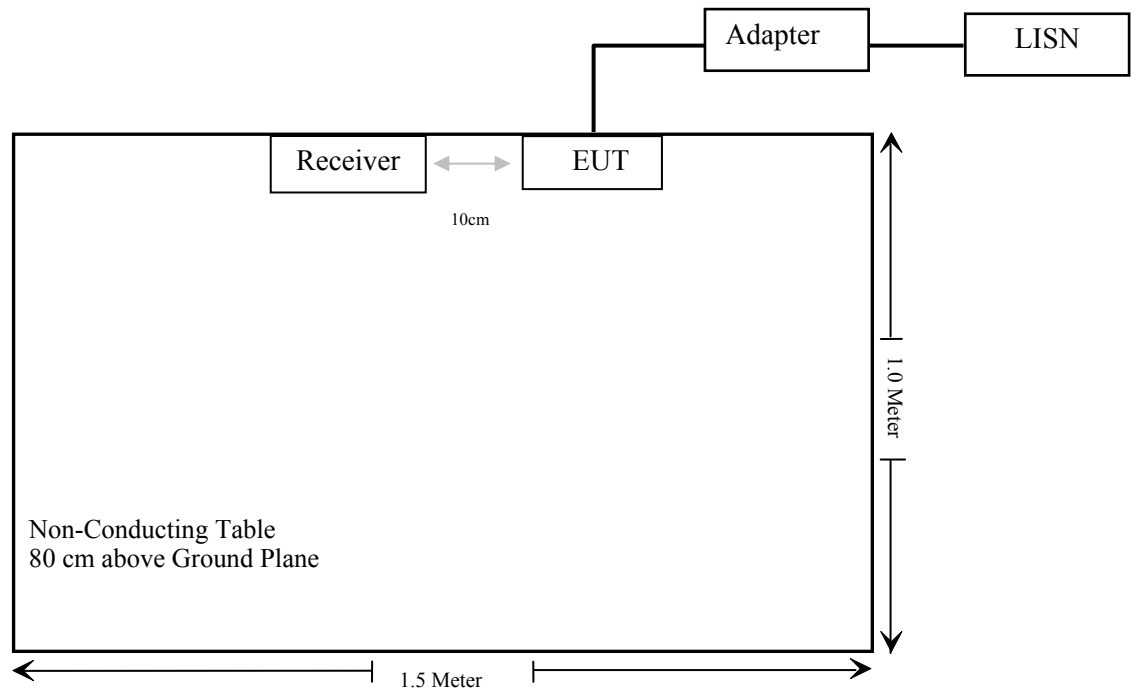

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1)	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliant*
§15.247 (a)(1)	20 dB Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

**Within Measurement Uncertainty*

§15.247 (i) and §1.1307(b) (1) - MAXIMUM PERMISSIBLE EXPOSURE

Standard Applicable

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Test Data

Prediction of MPE limit at a given distance

$$S = PG/4\pi R^2$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For Middle Channel:

Maximum peak output power at antenna input terminal: 12.66 (dBm)

Maximum peak output power at antenna input terminal: 18.45 (mW)

Prediction distance: >20 (cm)

Predication frequency: 2441.22 (MHz)

Antenna Gain (typical): 2.0(dBi)

Antenna Gain (typical): 1.584 (numeric)

The worst case is power density at predication frequency at 20 cm: 0.0058(mW/cm²)

MPE limit for general population exposure at prediction frequency: 1 (mW/cm²)

$$0.0058(\text{mW}/\text{cm}^2) < 1 (\text{mW}/\text{cm}^2)$$

Result: The power density of EUT at 20 cm compliants at 20 cm distance.

CFR47 §15.203 - ANTENNA REQUIREMENT

Standard Applicable

According to CFR47 § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a solder antenna on PCB. The maximum gain is 2dBi; please refer to the EUT internal photos.

Result: Compliant.


§15.207 (a) - CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliant Laboratories Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

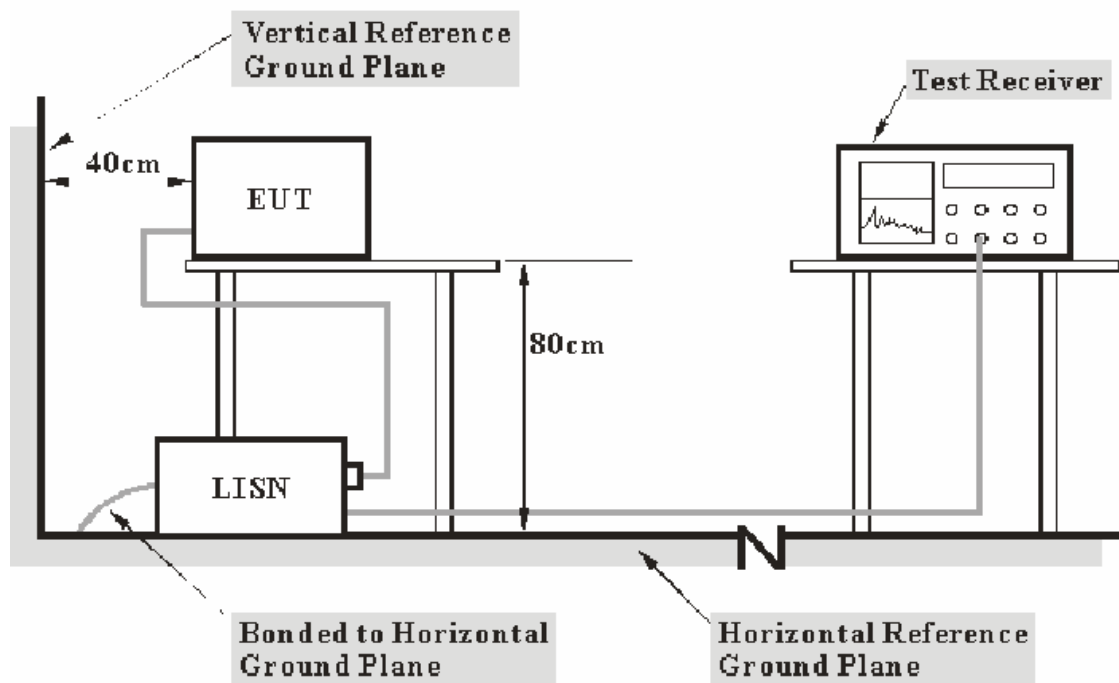

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12208	N/A	N/A
Rohde & Schwarz	EMI Test Receiver	ESCS30	DE25330	2008-03-25	2009-03-25
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2008-03-25	2009-03-25

* Com-Power's LISN were used as the supporting equipment.

* **Statement of Traceability:** Bay Area Compliant Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

0.25 dB at 0.41 MHz in the **Neutral** conductor mode

Test Data**Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Jim Li on 2008-06-16

Test Mode: Transmitting

Line Conducted Emissions				FCC Part 15.207	
Frequency (MHz)	Amplitude (dBμV)	Detector (QP/AV)	Conductor (Hot/Neutral)	Limit (dBμV)	Margin (dB)
0.410	57.40	QP	Neutral	57.65	0.25*
0.590	54.70	QP	Neutral	56.00	1.30*
1.220	53.30	QP	Neutral	56.00	2.70
0.370	55.80	QP	Neutral	58.50	2.70
1.220	40.60	AV	Neutral	46.00	5.40
0.405	51.80	QP	Hot	57.75	5.95
24.000	43.10	AV	Neutral	50.00	6.90
0.410	40.20	AV	Neutral	47.65	7.45
12.285	42.20	AV	Hot	50.00	7.80
1.215	47.30	QP	Hot	56.00	8.70
2.305	46.60	QP	Hot	56.00	9.40
0.370	37.90	AV	Neutral	48.50	10.60
12.285	48.90	QP	Hot	60.00	11.10
0.590	34.40	AV	Neutral	46.00	11.60
0.270	46.50	QP	Hot	61.12	14.62
0.405	30.40	AV	Hot	47.75	17.35
2.305	27.40	AV	Hot	46.00	18.60
1.215	27.10	AV	Hot	46.00	18.90
24.575	27.90	AV	Hot	50.00	22.10
24.575	36.20	QP	Hot	60.00	23.80
11.505	36.10	QP	Neutral	60.00	23.90
0.270	25.10	AV	Hot	51.12	26.02
11.505	22.60	AV	Neutral	50.00	27.40
24.000	31.40	QP	Neutral	60.00	28.60

**Within Measurement Uncertainty*

Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.

Conduction Emission


16. Jun 08 23:05

EUT: Digital 2.4G Wireless baby monitor
Manuf: Gospell M/N: GD8209
Op Cond:
Operator: Jim
Test Spec: AC 120V/60Hz hot
Comment: Temp: 25 Hum: 56%

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150K	30M	5k	9k	PK+AV	10ms	AUTO	LN OFF

Transducer	No.	Start	Stop	Name
	5	9k	30M	ESH2_Z5

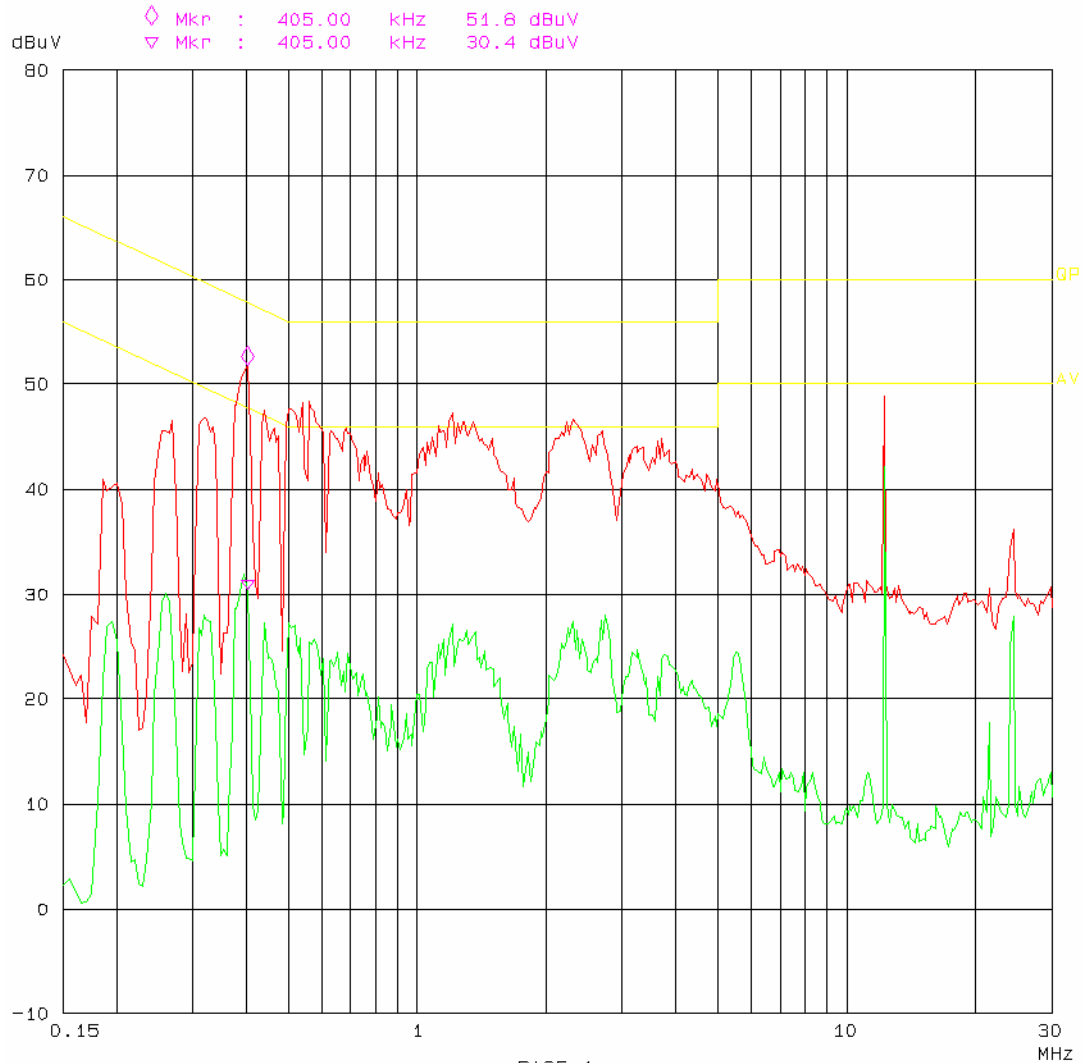

Conduction Emission


16. Jun 08 22:17

EUT: Digital 2.4G Wireless baby monitor
Manuf: Gospell M/N: G08209
Op Cond:
Operator: Jim
Test Spec: AC 120V/60Hz Neutral
Comment: Temp: 25 Hum: 56%

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK+AV	10ms	AUTO	LN OFF

Transducer	No.	Start	Stop	Name
	5	9k	30M	ESH2_Z5

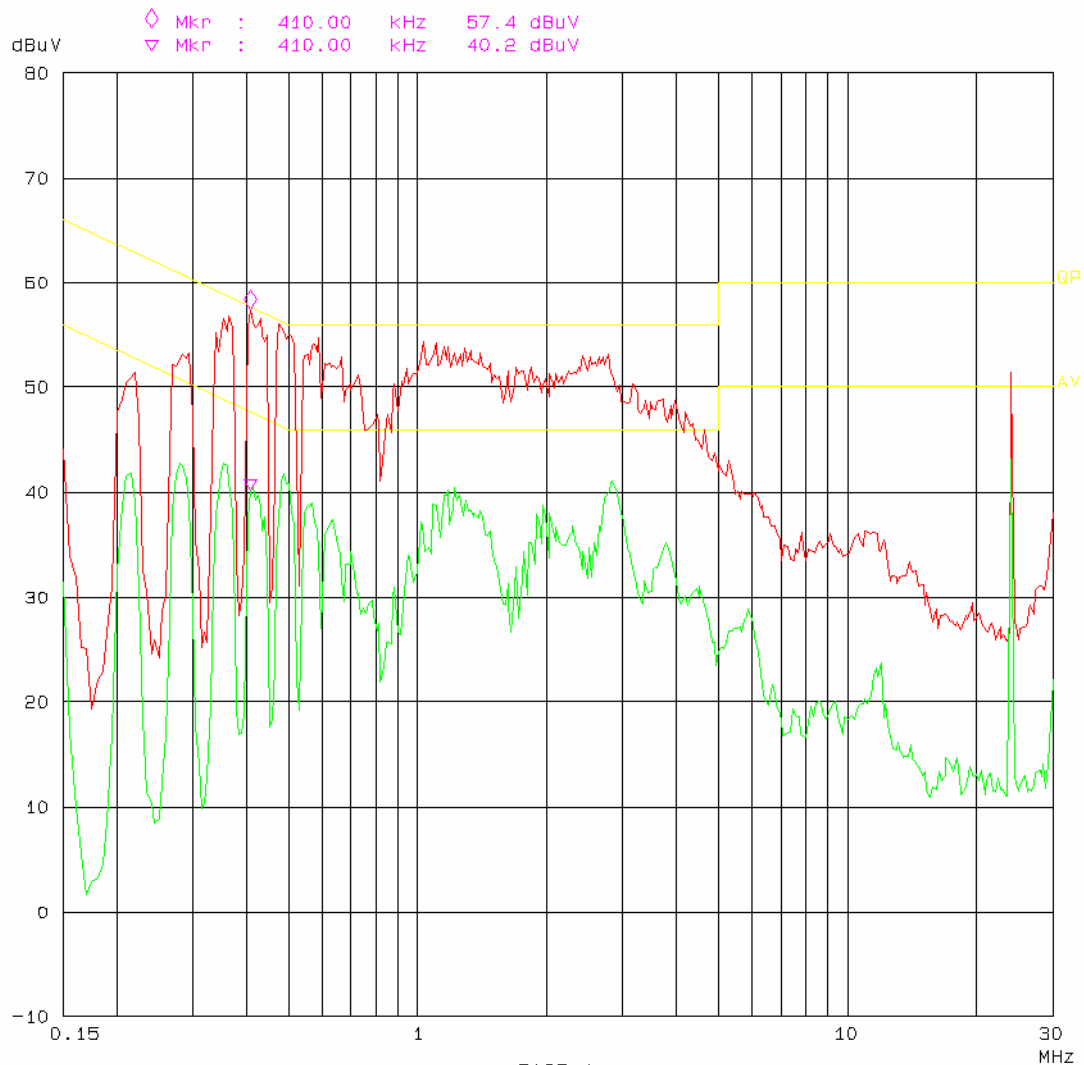

PAGE 1

CFR47 §15.205, §15.209, §15.247 - RADIATED EMISSIONS

Applicable Standard


CFR47 §15.205; §15.209; §15.247 (d).

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliant Laboratories Corp. (Shenzhen) is ± 4.0 dB.

EUT Setup

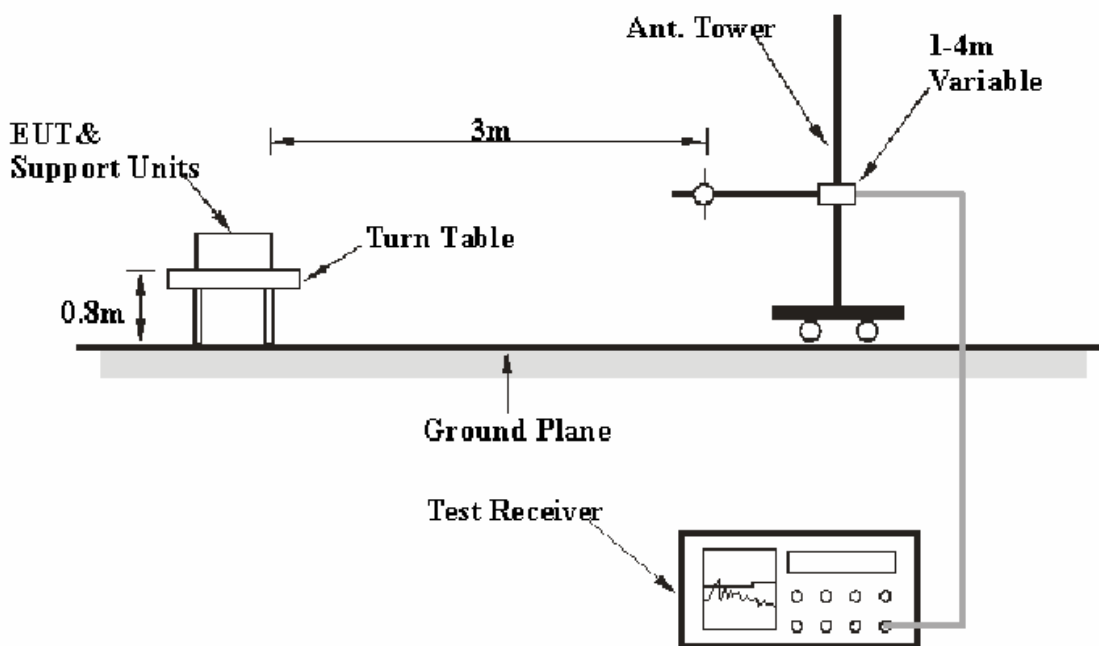

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.109, FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
30 MHz – 1000 MHz	100 kHz	300 kHz
1000 MHz – 25 GHz	1 MHz	3 MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2007-11-15	2008-11-15
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2008-03-11	2009-03-11
HP	Amplifier	8449B	3008A00277	2007-09-29	2008-09-29
Sunol Sciences	Horn Antenna	DRH-118	A052604	2007-09-25	2008-09-25
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2008-05-09	2009-05-09

*** Statement of Traceability:** Bay Area Compliant Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz and peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of Compliant with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.109, 15.205, 15.209, and 15.247, with the worst margin reading of:

Transmitting mode (Below 1 GHz):

4.7 dB at 503.845 MHz in the Horizontal polarization

Transmitting mode (Above 1 GHz):

12.46 dB at 4808.7 MHz in the Vertical polarization (Low Channel)
10.28 dB at 4882.44 MHz in the Horizontal polarization (Middle Channel)
5.90 dB at 4943.88 MHz in the Vertical polarization (High Channel)


Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.8 kPa

The testing was performed by Jim Li on 2008-07-21.

Test Mode: Transmitting (Below 1GHz)

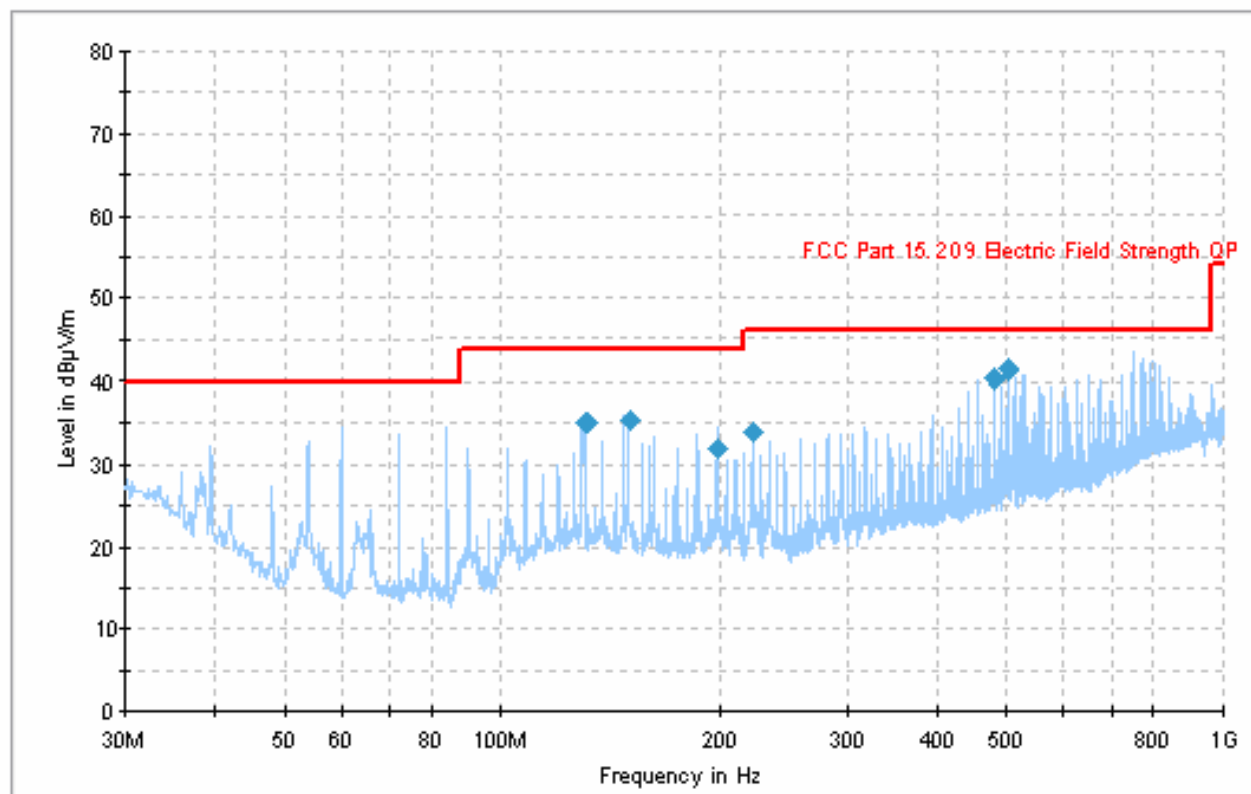

Frequency (MHz)	Corrected Amp. (dBμV/m)	Ant. Height (cm)	Ant. Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBμV/m)	Margin (dB)
503.845000	41.3	332.0	H	311.0	0.0	46.0	4.7
479.231000	40.4	102.0	V	15.0	-0.2	46.0	5.6
149.975812	35.4	102.0	V	136.0	-16.9	43.5	8.1
130.695188	35.2	230.0	V	0.0	-15.5	43.5	8.3
197.937375	32.0	136.0	H	88.0	-15.5	43.5	11.5
222.013562	34.1	102.0	H	141.0	-17.7	46.0	11.9

Test Mode: Transmitting (Above 1GHz)

Freq. (MHz)	Meter Reading (dBuV)	Detector PK/QP/AV	Direction Degree	Antenna			Cable Loss (dB)	Pre- Amp. Gain (dB)	Corr. Amp. (dBuV/m)	FCC Part 15.247/209		
				Height (m)	Polar (H/V)	Factor (dB)				Limit (dBuV/m)	Margin (dB)	Remarks
Low Channel												
4808.7	39.04	AV	90	1.2	V	34.7	1.20	33.4	41.54	54	12.46	Harmonic
4808.7	39.04	AV	180	1.3	H	34.6	1.20	33.4	41.44	54	12.56	Harmonic
7213.05	43.84	AV	120	1.2	H	24.5	4.64	35.0	37.98	54	16.02	Harmonic
7213.05	43.84	AV	60	1.2	V	24.5	4.64	35.0	37.98	54	16.02	Harmonic
4808.7	43.7	PK	90	1.0	V	34.7	1.20	33.4	46.20	74	27.80	Harmonic
4808.7	43.7	PK	90	1.0	H	34.6	1.20	33.4	46.10	74	27.90	Harmonic
7213.05	46.29	PK	180	1.3	H	24.5	4.64	35.0	40.43	74	33.57	Harmonic
7213.05	46.29	PK	320	1.1	V	24.5	4.64	35.0	40.43	74	33.57	Harmonic
Middle Channel												
4882.44	41.22	AV	234	1.0	H	34.7	1.20	33.4	43.72	54	10.28	Harmonic
4882.44	41.22	AV	153	1.5	V	34.6	1.20	33.4	43.62	54	10.38	Harmonic
7323.66	47.57	AV	135	1.3	H	24.5	4.64	35.0	41.71	54	12.29	Harmonic
7323.66	47.57	AV	85	1.0	V	24.5	4.64	35.0	41.71	54	12.29	Harmonic
4882.44	46.79	PK	142	1.1	H	34.7	1.20	33.4	49.29	74	24.71	Harmonic
4882.44	46.79	PK	243	1.0	V	34.6	1.20	33.4	49.19	74	24.81	Harmonic
7323.66	48.20	PK	156	1.2	H	24.5	4.64	35.0	42.34	74	31.66	Harmonic
7323.66	48.20	PK	265	1.4	V	24.5	4.64	35.0	42.34	74	31.66	Harmonic
High Channel												
4943.88	45.60	AV	142	1.4	V	34.7	1.20	33.4	48.10	54	5.90	Harmonic
4943.88	45.60	AV	145	1.2	H	34.6	1.20	33.4	48.00	54	6.00	Harmonic
7415.82	46.82	AV	156	1.2	H	24.5	4.64	35.0	40.96	54	13.04	Harmonic
7415.82	46.82	AV	210	1.2	V	24.5	4.64	35.0	40.96	54	13.04	Harmonic
4943.88	47.90	PK	142	1.1	V	34.7	1.20	33.4	50.40	74	23.60	Harmonic
4943.88	47.90	PK	256	1.3	H	34.6	1.20	33.4	50.30	74	23.70	Harmonic
7415.82	49.42	PK	128	1.5	H	24.5	4.64	35.0	43.56	74	30.44	Harmonic
7415.82	49.42	PK	240	1.4	V	24.5	4.64	35.0	43.56	74	30.44	Harmonic

CFR47 §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliant Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.8 kPa

The testing was performed by Jim Li on 2008-07-22.


Test Mode: Transmitting

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2404.35	2.028	1.2	Pass
Adjacent Channel	2406.40			
Mid Channel	2441.22	2.088	1.2	Pass
Adjacent Channel	2443.26			
High Channel	2469.89	2.052	1.2	Pass
Adjacent Channel	2471.94			

Test Result: Compliant.

Please refer to following plots


Low Channel

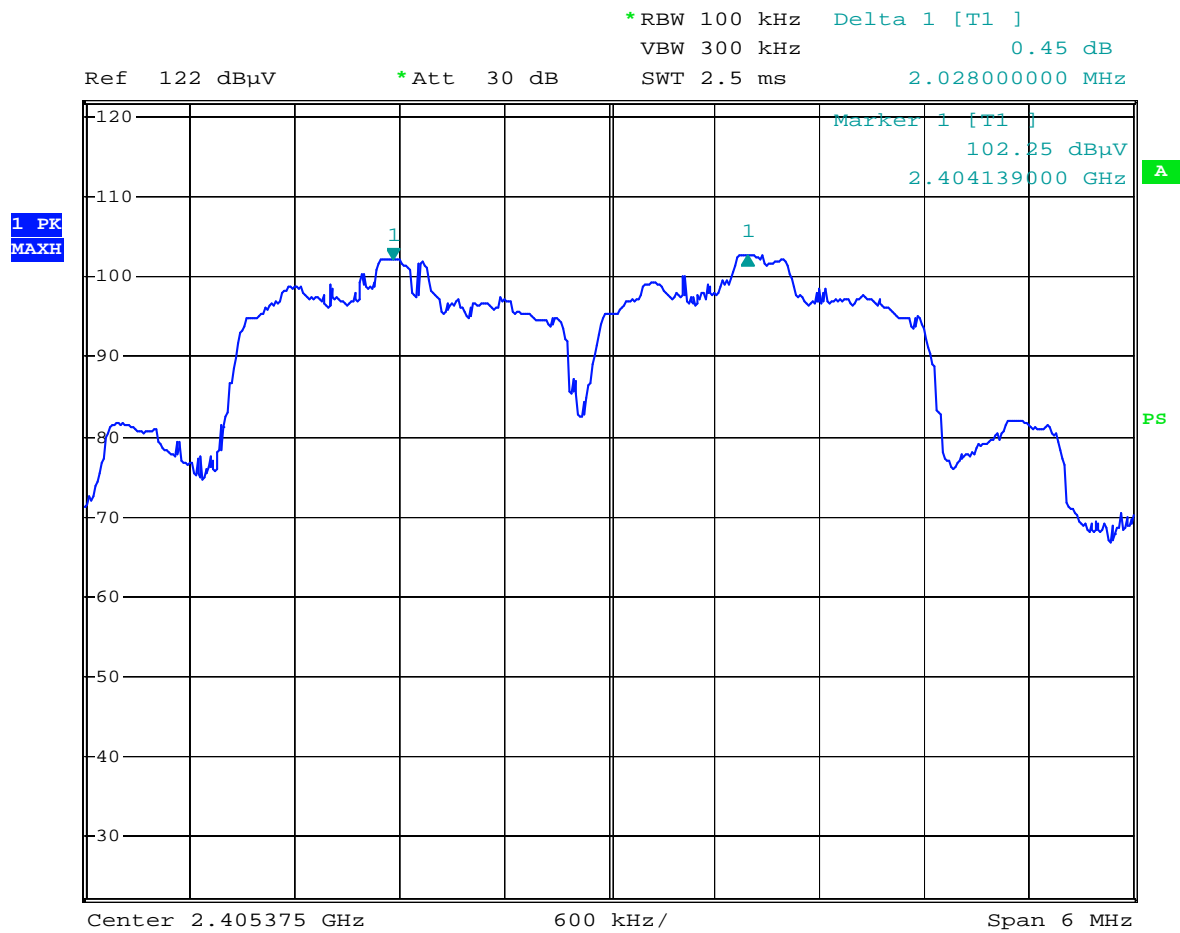

channel separation low channel

Date: 22.JUL.2008 20:50:43


Middle Channel

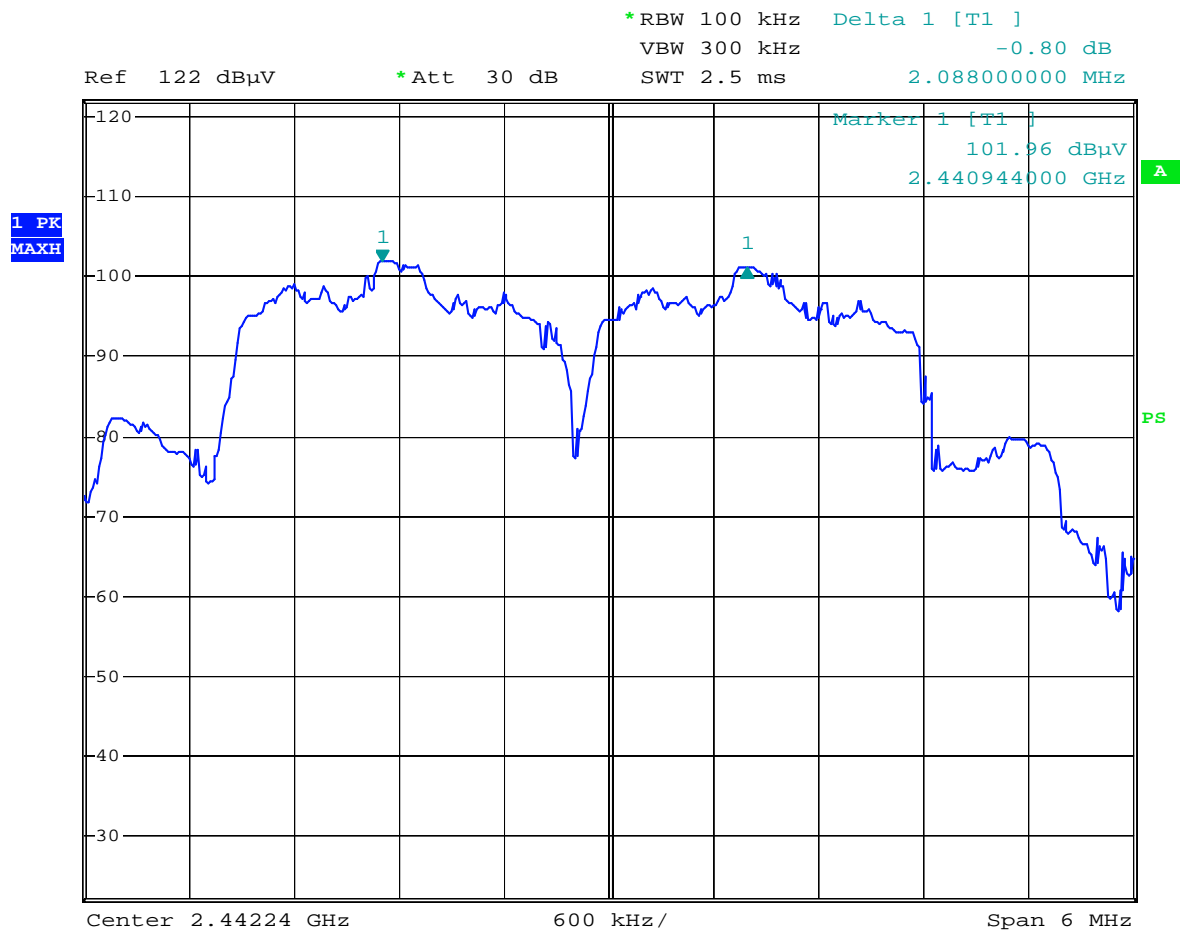

channel separation middle channel

Date: 22.JUL.2008 20:57:33

High Channel

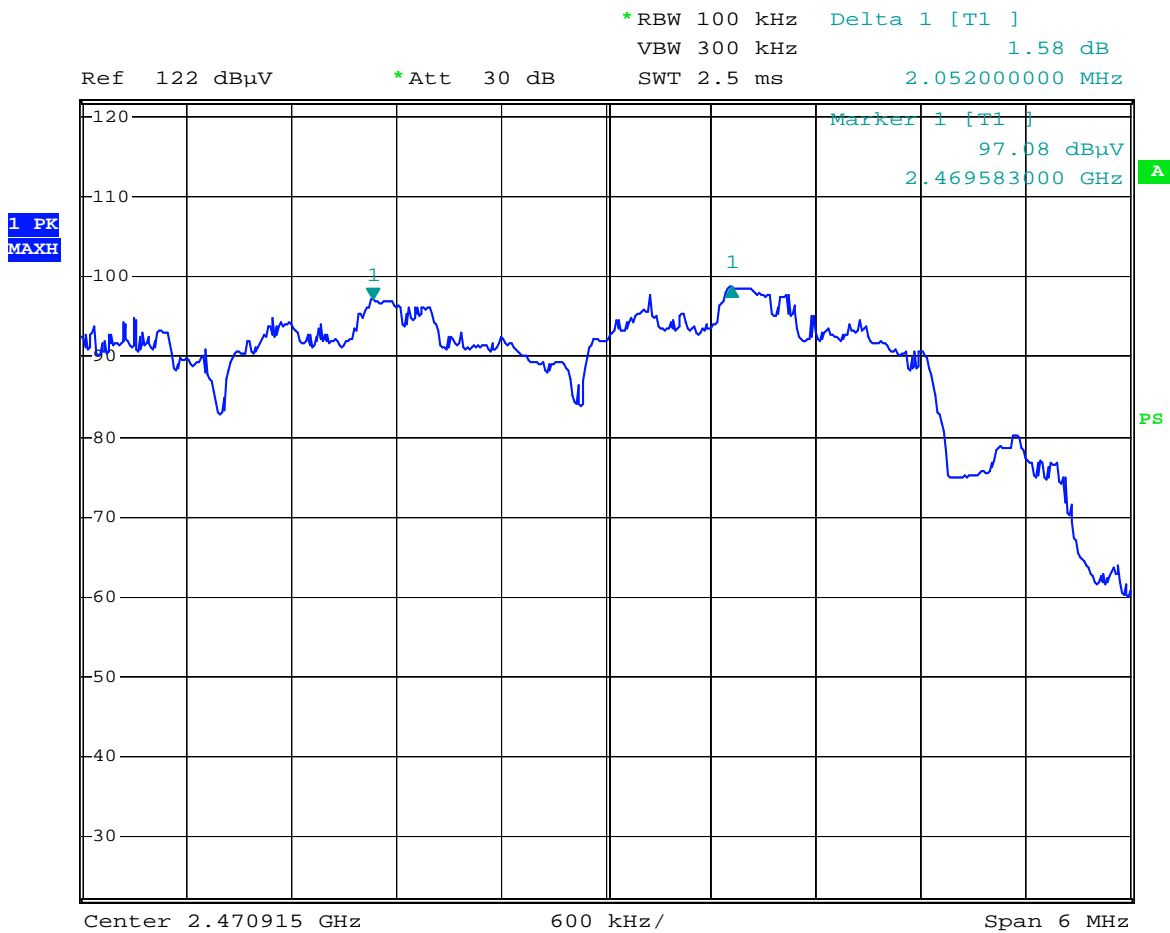

channel separation high channel

Date: 22.JUL.2008 21:12:43

CFR47 §15.247(a) (1) – 20dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliant Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.8 kPa

The testing was performed by Jim Li on 2008-07-18.

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)
Low	2404.35	1.800
Middle	2441.22	1.820
High	2471.94	1.860

Test Result: Please refer to following plots


Low Channel

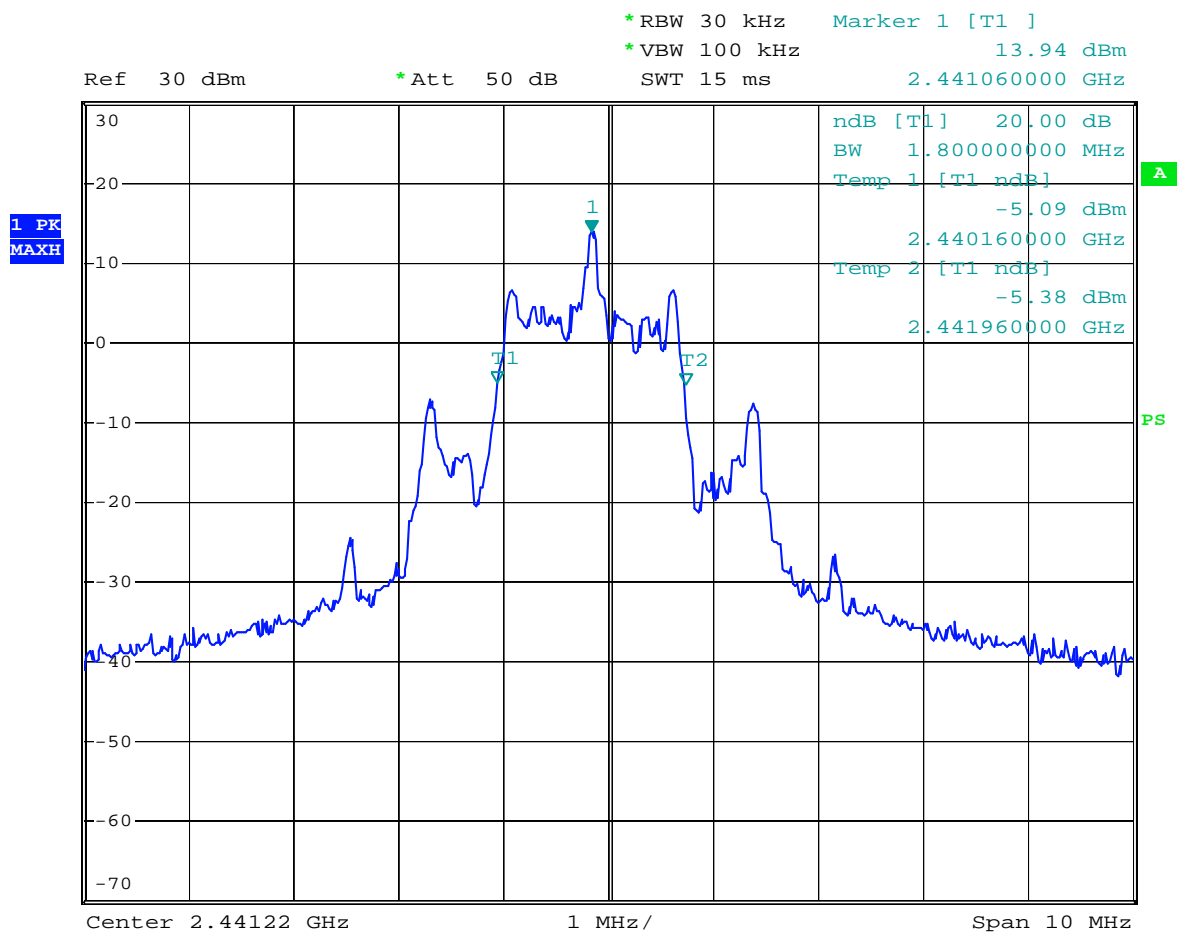

Gospell M/N:GD8209 20dB Low channel

Date: 18.JUL.2008 22:04:31


Middle Channel

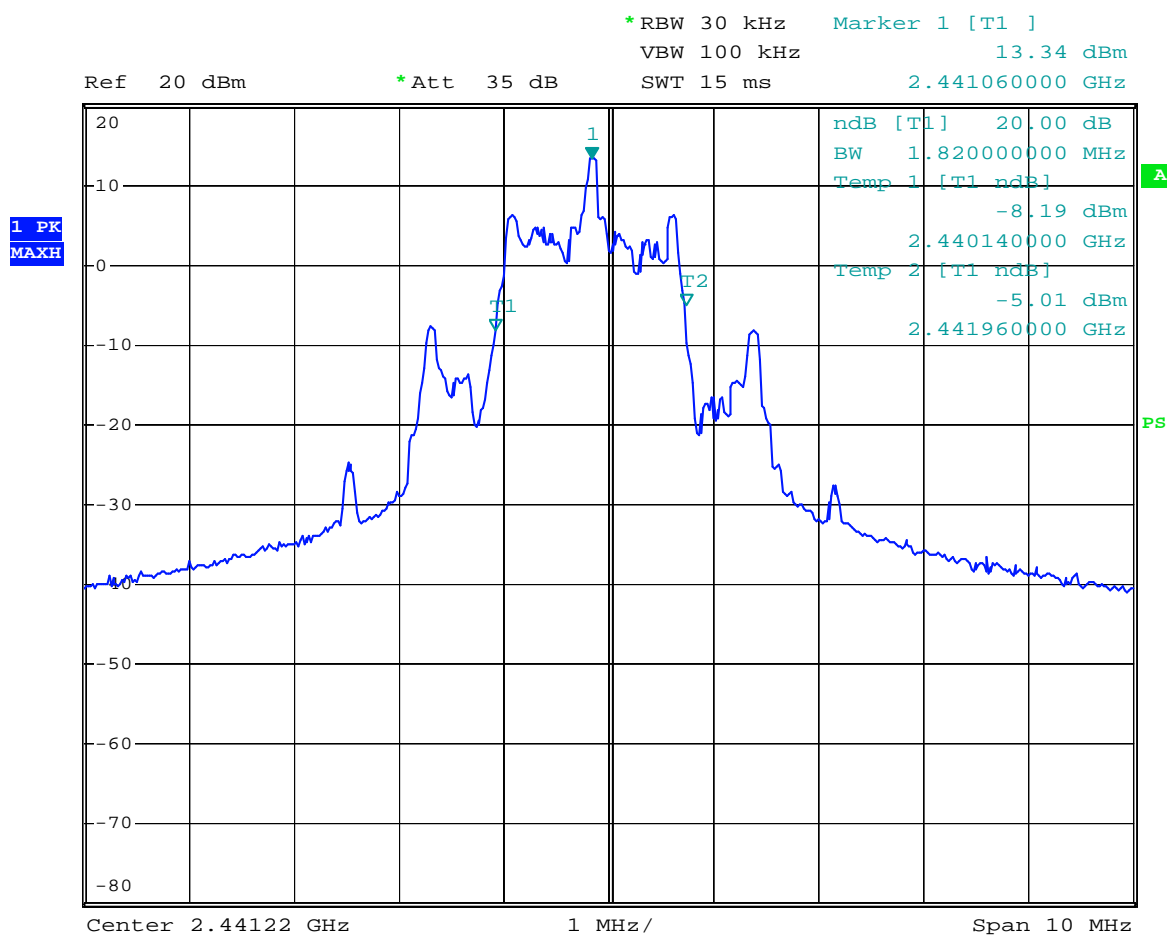

Gospell M/N:GD8209 20dB Middle channel

Date: 18.JUL.2008 22:14:52

High Channel

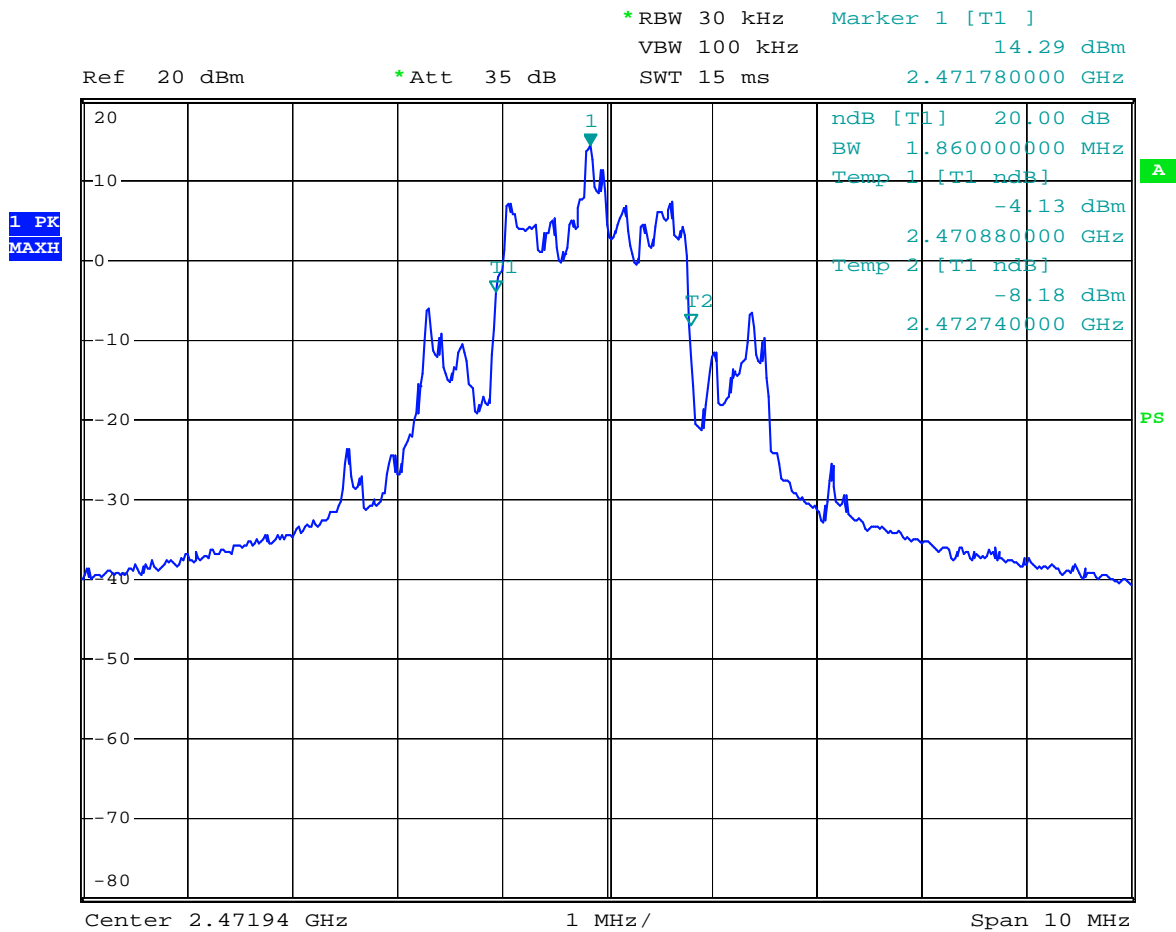

Gossell M/N:GD8209 20dB High channel

Date: 18.JUL.2008 22:17:16

CFR47 §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliant Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in transmitting mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.8 kPa

The testing was performed by Jim Li on 2008-07-22.


Test Mode: Transmitting

Test Result: Compliant.

Please refer to following plot

Hopping Channel Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
2400-2483.5	32	≥15

Number of Hopping Channels

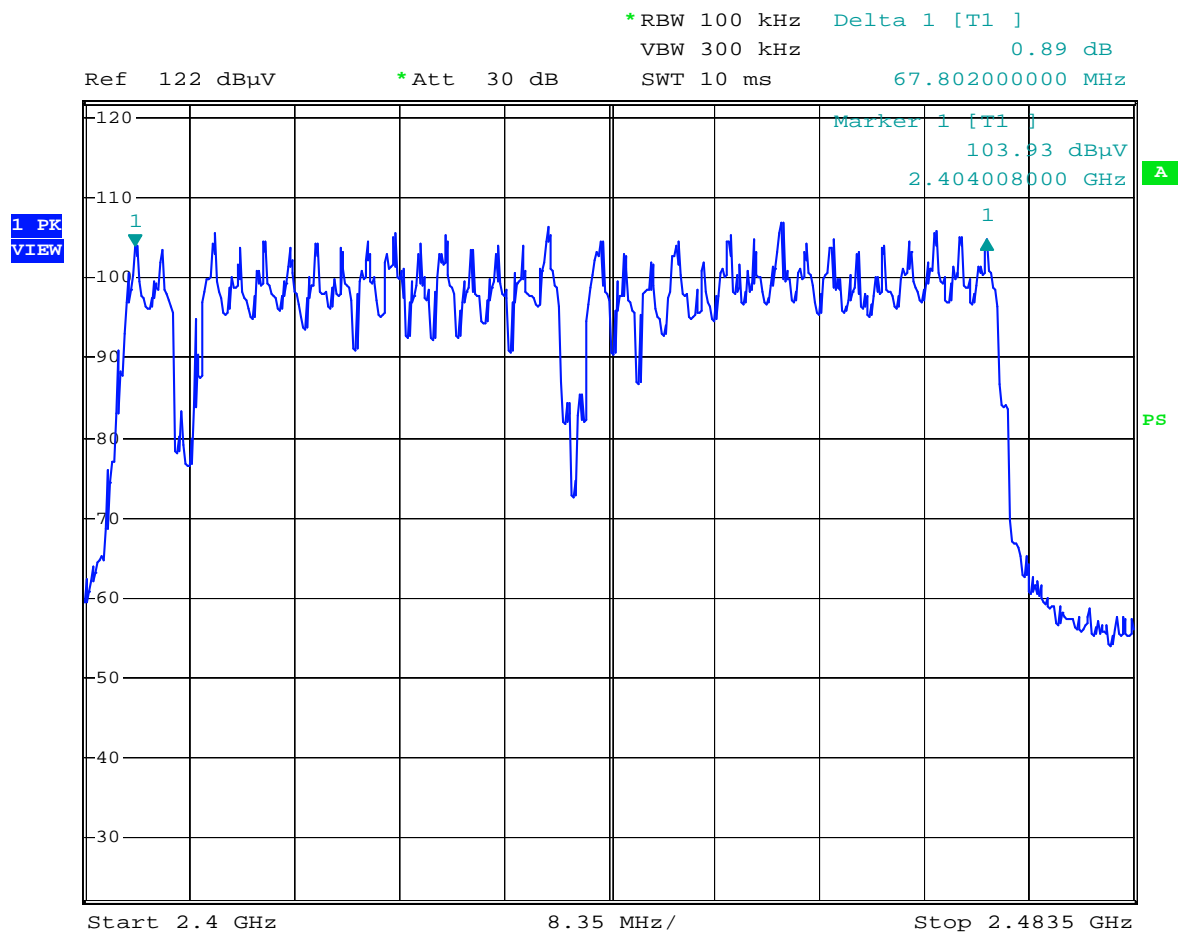

hopping channels

Date: 22.JUL.2008 20:19:17

CFR47 §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliant Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 12.8s
Hop rate=1600/s

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.8 kPa

The testing was performed by Jim Li on 2008-07-28.

Test Result: Compliant.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Pulse width (ms)	Dwell time (s)	Limit (s)	Result
Low	0.348	0.0579	0.4	Pass
Middle	0.344	0.0572	0.4	Pass
High	0.348	0.0579	0.4	Pass

NOTE: Dwell time = Pulse time*13* (32*0.4) Seconds


Please refer to the following plots.

Low Channel

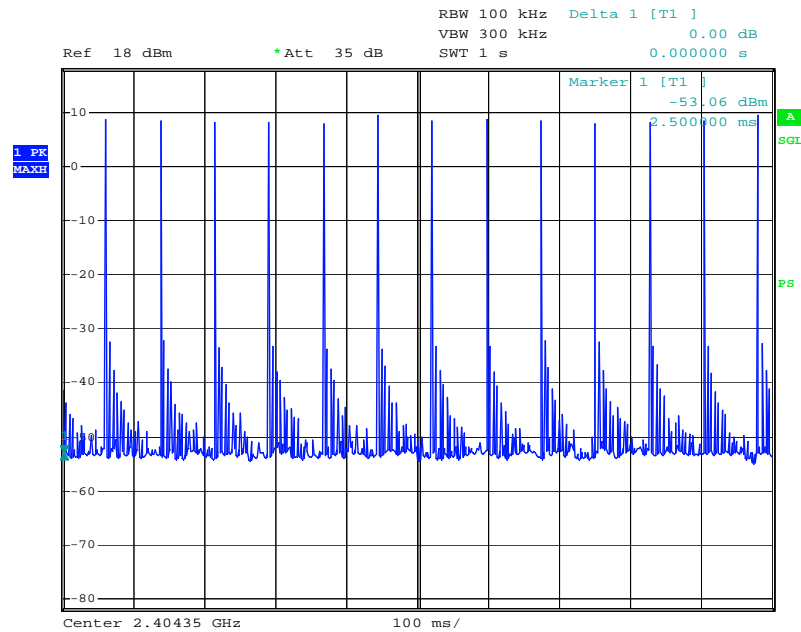

hopping low channel


Date: 19.JUL.2008 13:17:25

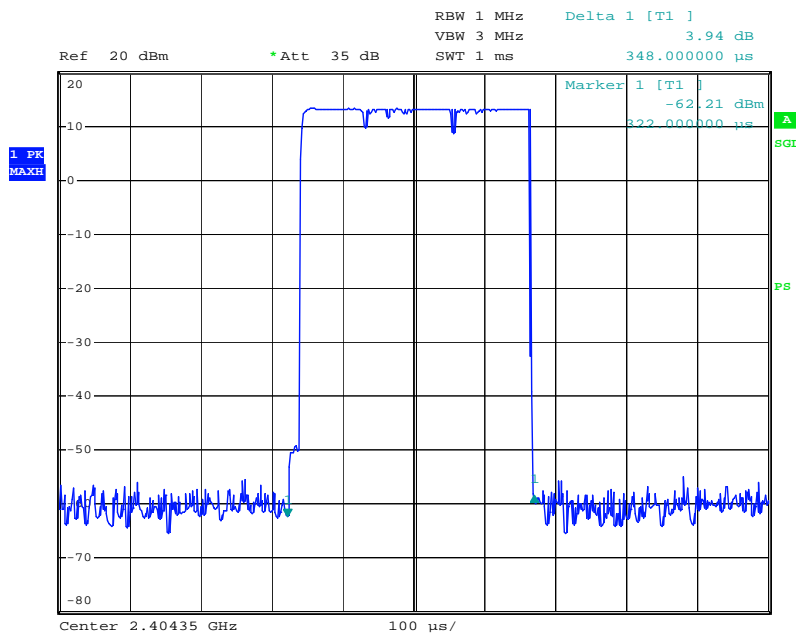

Gospel M/N:GD8209 dwell time low channel


Date: 18.JUL.2008 22:24:25

Middle Channel

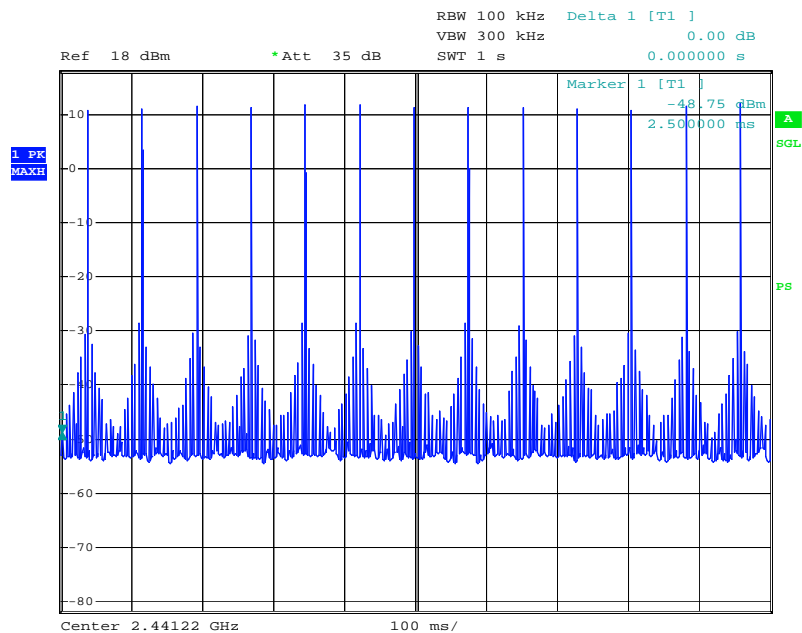

hopping middle channel


Date: 19.JUL.2008 13:16:30

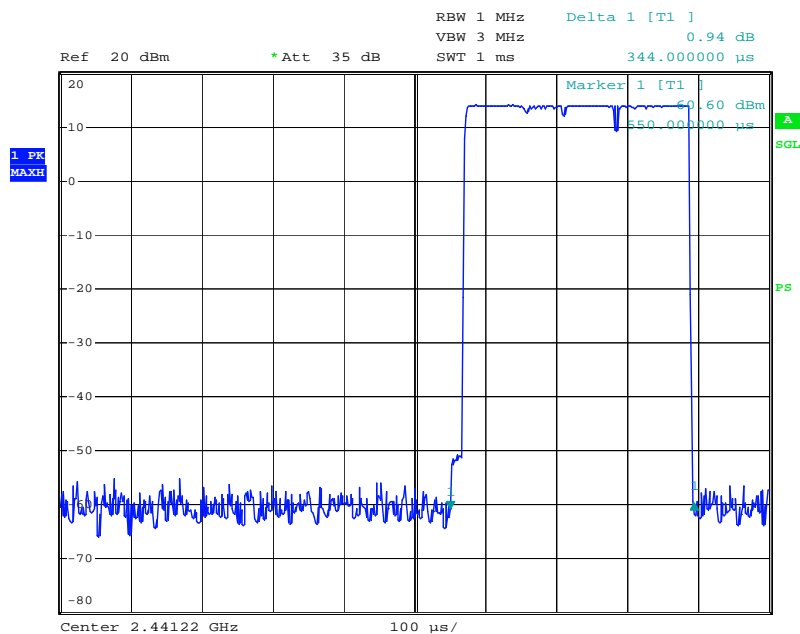

Gossell M/N:GD8209 dwell time middle channel


Date: 18.JUL.2008 22:22:38

High Channel

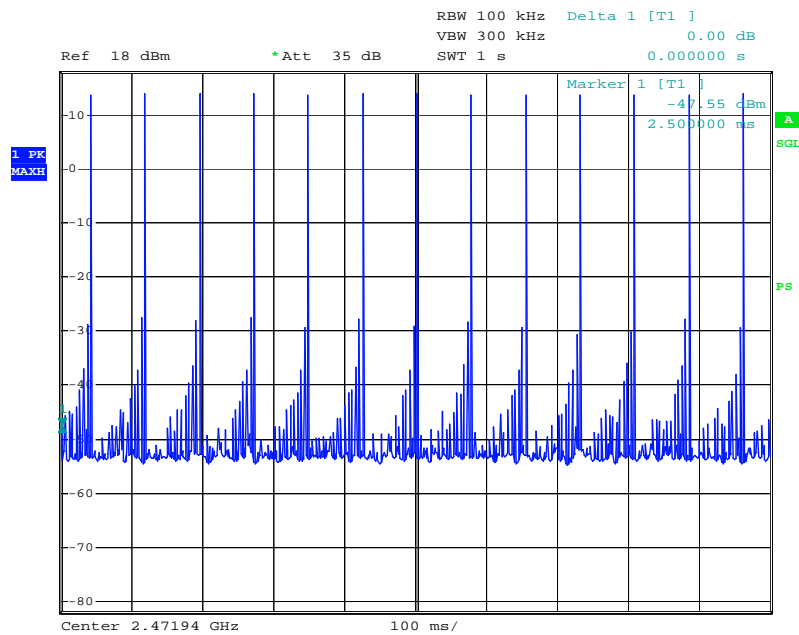

hopping high channel

Date: 19.JUL.2008 13:18:14

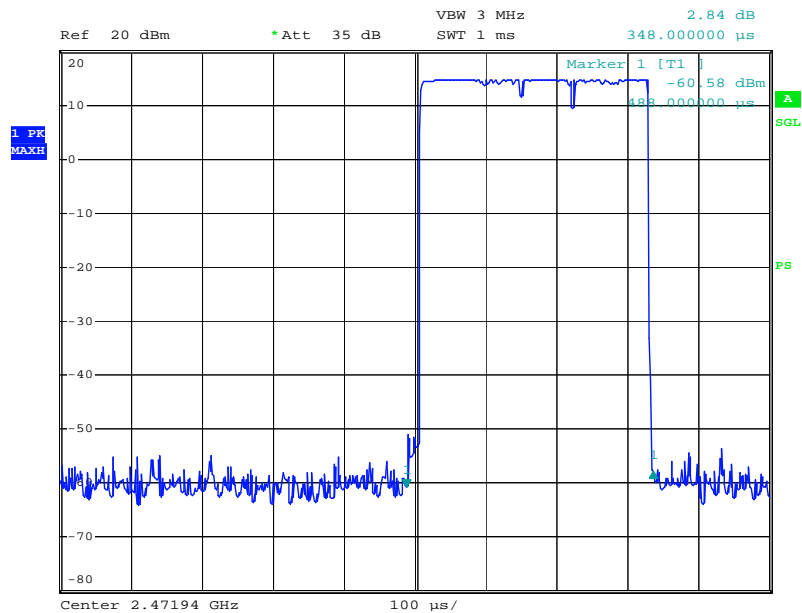

Gospell M/N:GD8209 dwell time High channel

Date: 18.JUL.2008 22:20:45

CFR47 §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2008-05-09	2009-05-09

*** Statement of Traceability:** Bay Area Compliant Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.

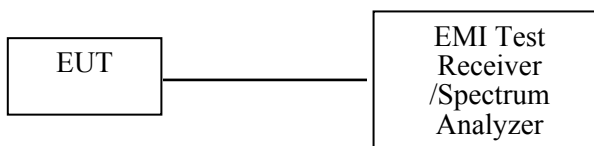

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	56 %
ATM Pressure:	100.8kPa


The testing was performed by Jim Li on 2008-07-28.

Test Result: Compliant.

Refer to attached plots and tabular data sheet.

Channel	Channel Frequency (MHz)	Power Output		Part15.247 Limit (mW)
		(dBm)	(mW)	
Low	2404.35	12.28	16.90	125
Mid	2441.22	12.66	18.45	125
High	2471.94	12.42	17.46	125


Low Channel

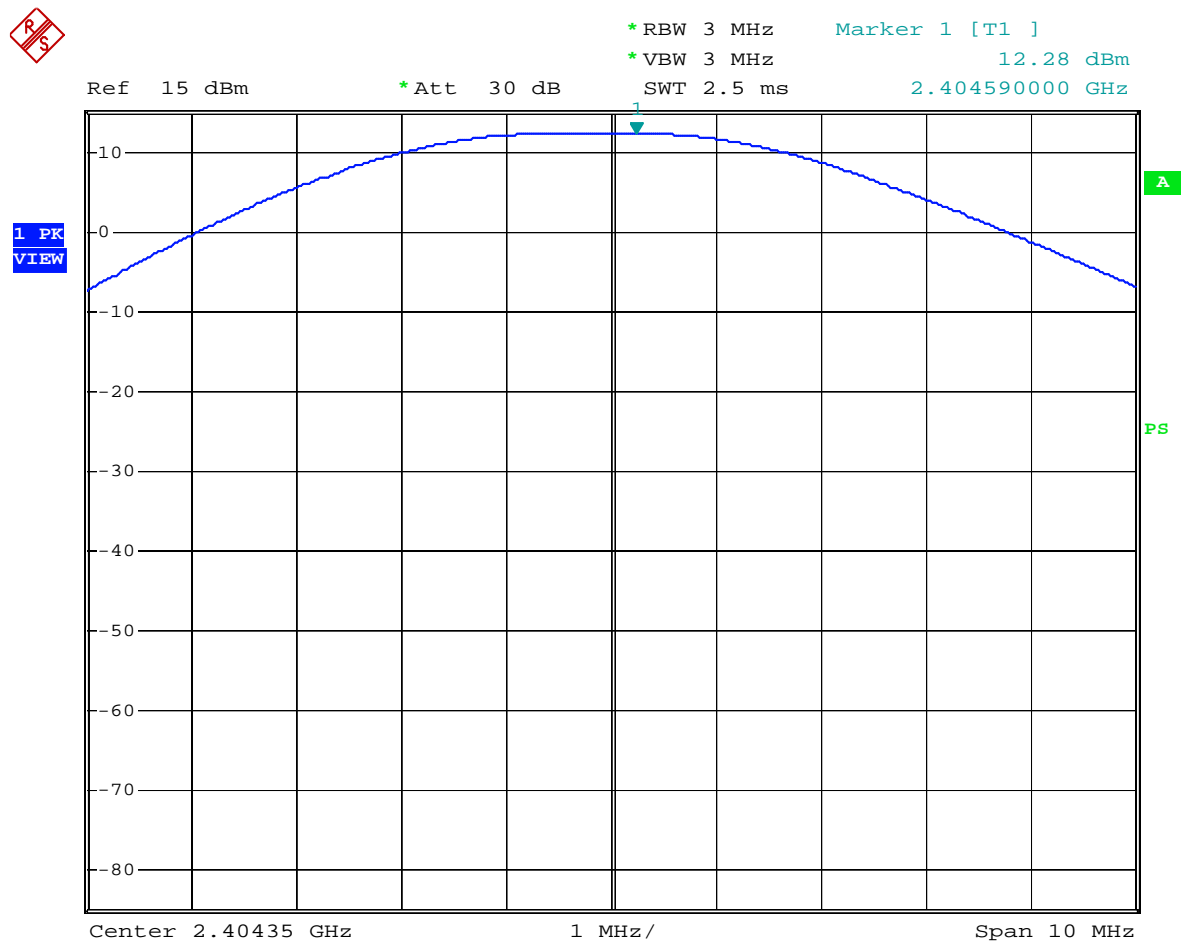

Low channel

Date: 28.JUL.2008 16:02:37


Middle Channel

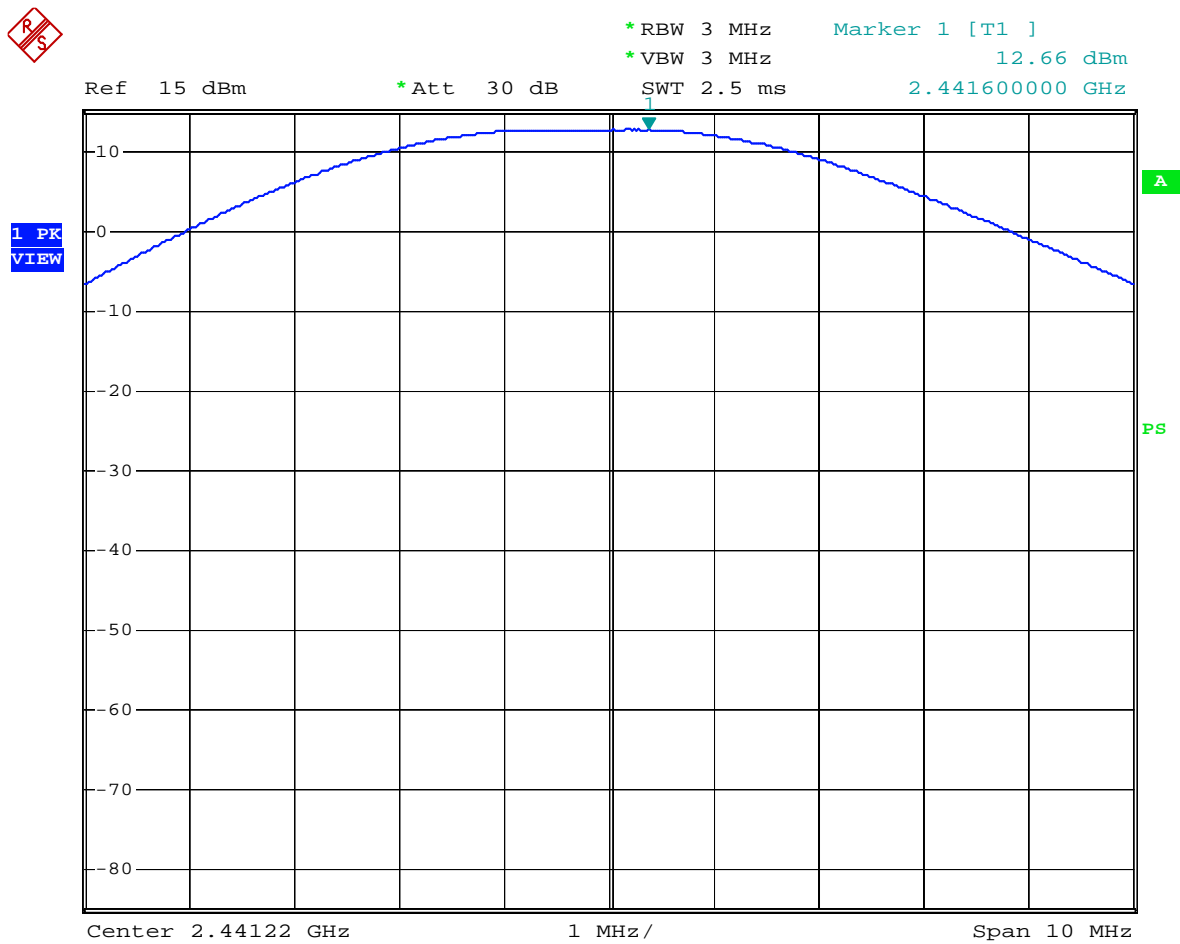

Middle channel

Date: 28.JUL.2008 16:01:22

High Channel

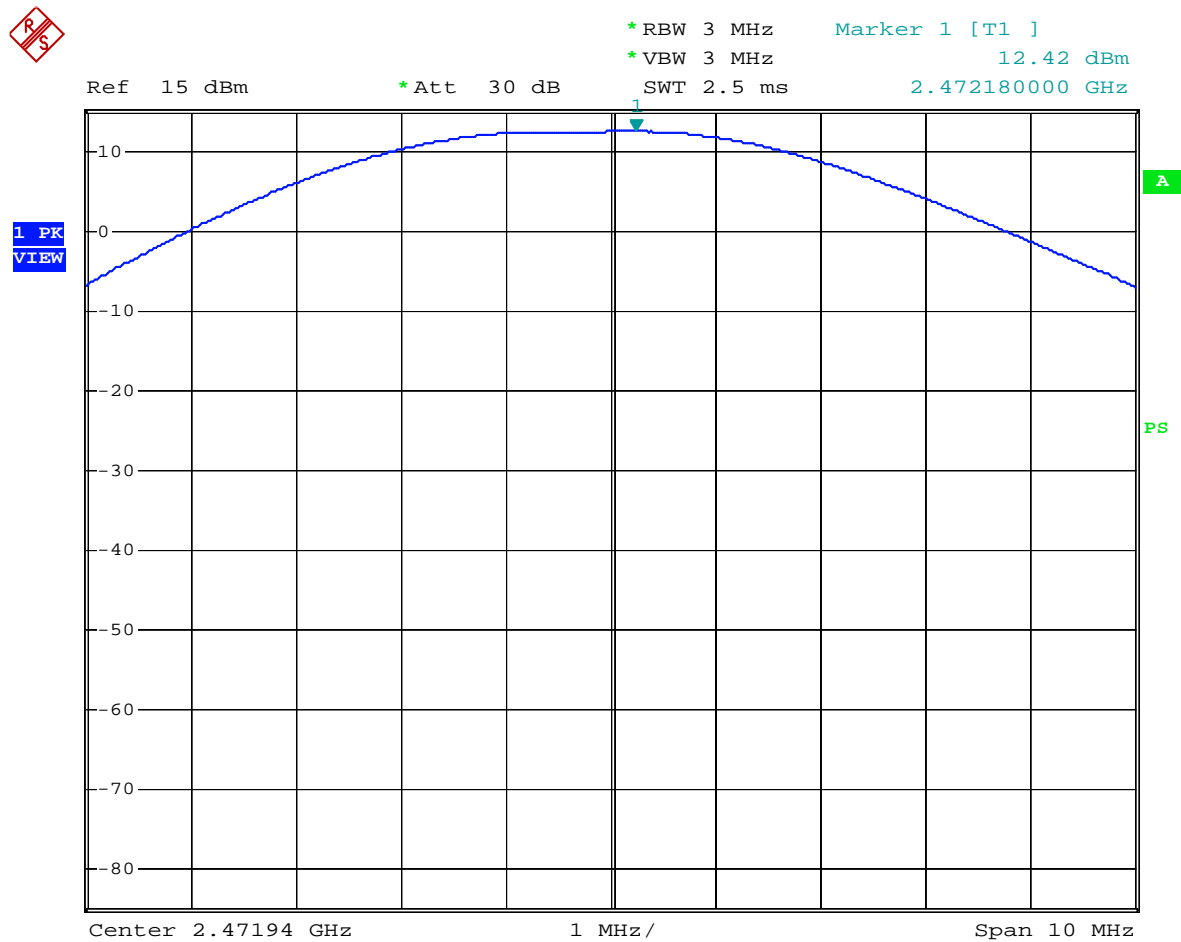

High channel

Date: 28.JUL.2008 15:59:55

CFR47 §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliant Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**

Temperature:	25°C
Relative Humidity:	56 %
ATM Pressure:	100.8kPa

The testing was performed by Jim Li on 2008-07-19.

Test Mode: Transmitting


Frequency (MHz)	Attenuation (dBc)	Limit (dBc)
2398.25	46.08	20
2484.10	48.01	20

Note: Attenuation = Peaklevel – Emission Level

Test Result: Compliant.


Please refer to following plot.

Band Edge Left Side

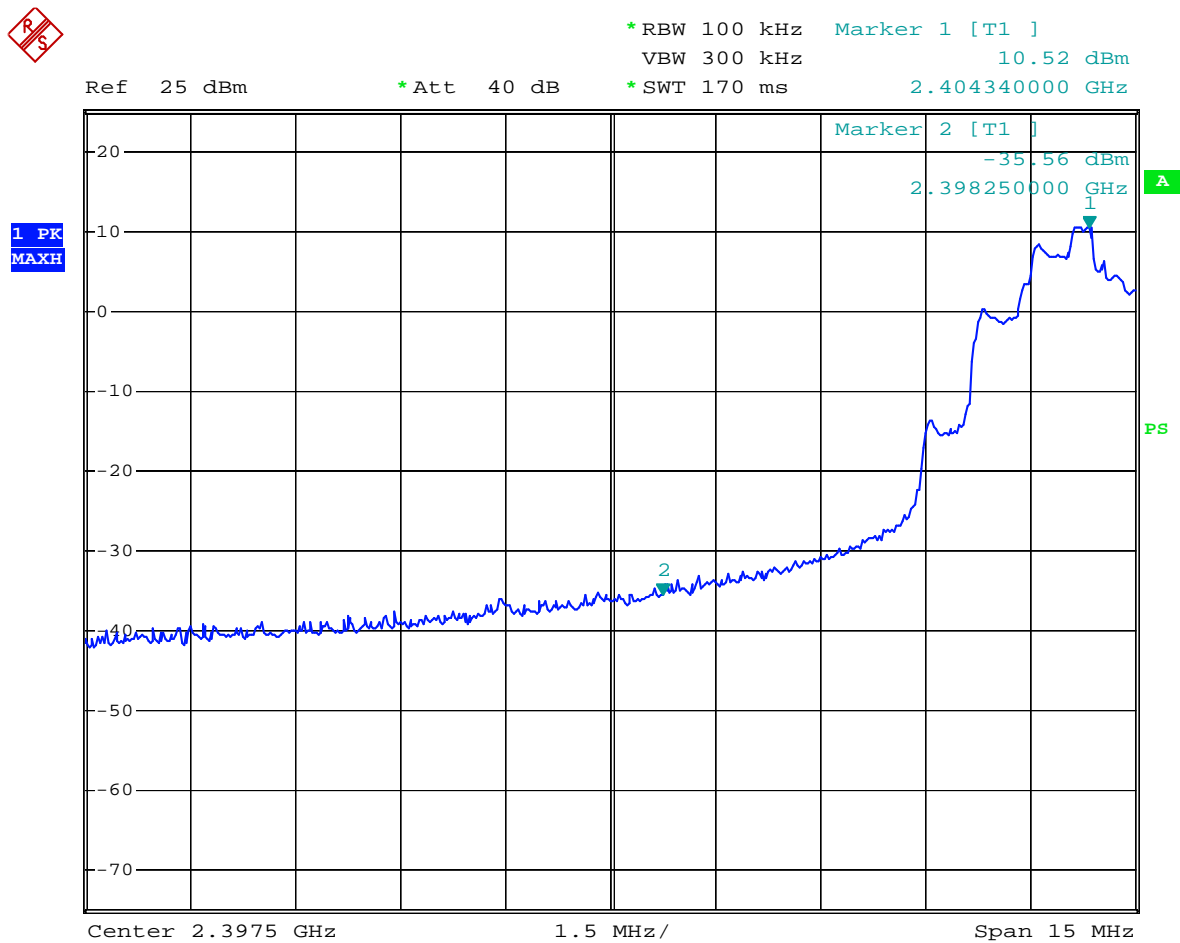

band edge low channel

Date: 25.JUL.2008 23:07:59

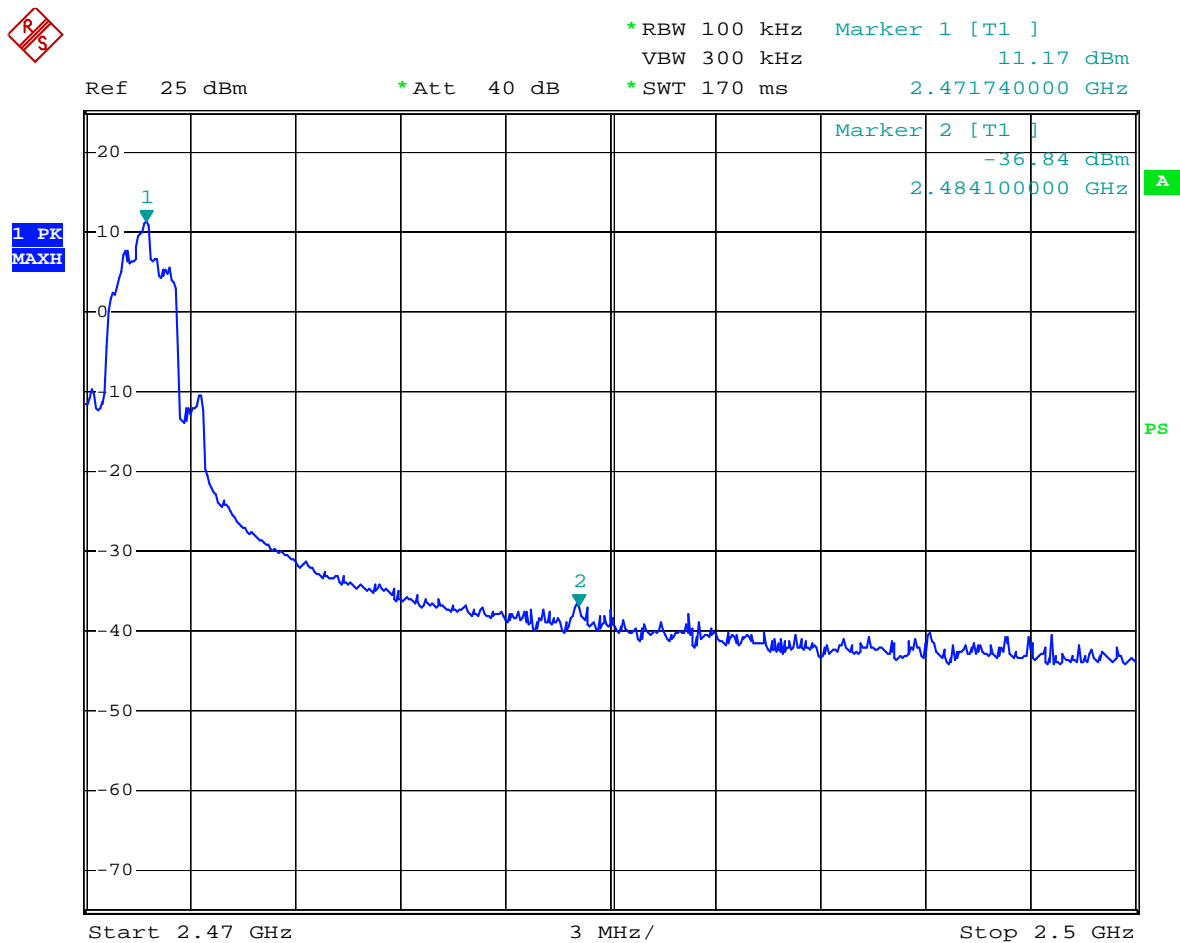Band Edge Right Side

band edge high channel

Date: 25.JUL.2008 23:04:20

******* END OF REPORT *******