



TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

ACC [®]鑫 宇 环 检 测 Attestation of Global Compliance


802.11g TEST RESULT TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

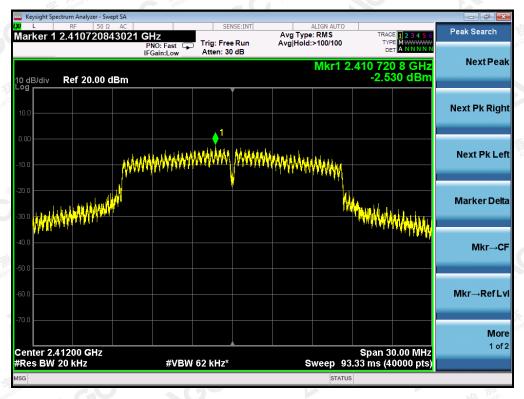

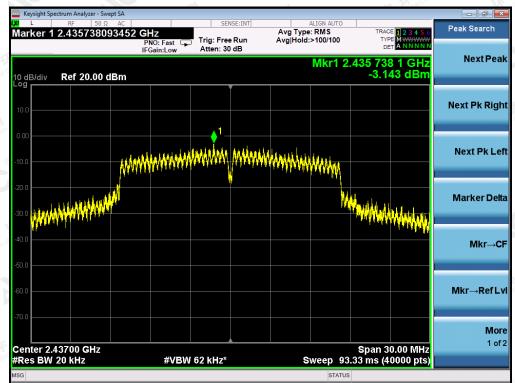

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

ACC[®]鑫 宇 环 检 测 Attestation of Global Compliance

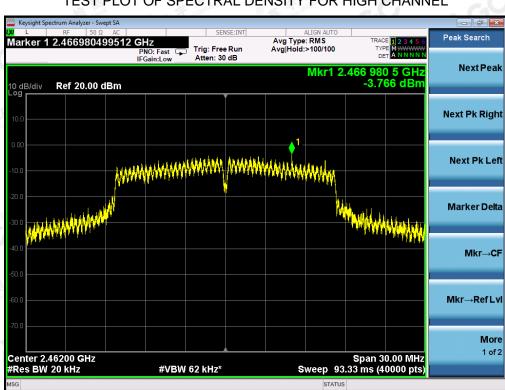

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL




Peak Search Avg Type: RMS Avg|Hold:>100/100 1 2.409734568364 GHz ACE 1 2 3 4 Marker Trig: Free Run Atten: 30 dB PNO: Fast IFGain:Low Next Pea 9 734 6 GHz -3.134 dBm Mkr1 2.409 10 dB/div Ref 20.00 dBm Next Pk Right ALLENGT Next Pk Left ar a share a s Marker Delta (Land) Mkr→CF Mkr→RefLvl More 1 of 2 Center 2.41200 GHz #Res BW 20 kHz Span 30.00 MHz Sweep 93.33 ms (40000 pts) #VBW 62 kHz*

802.11n 20 TEST RESULT TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL



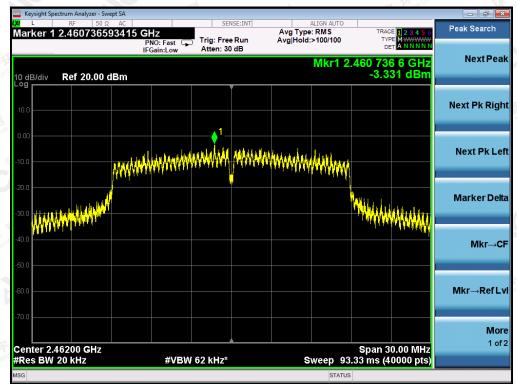



TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

AGC[®]鑫宇环检测 Attestation of Global Compliance

802.11n 40 TEST RESULT


TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

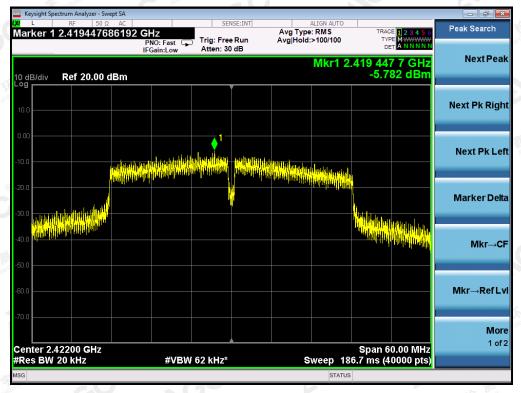

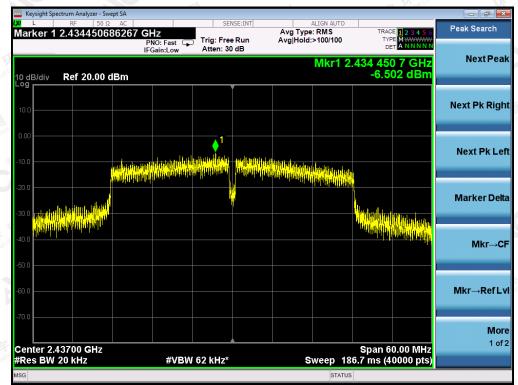

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

ACC[®]鑫宇环检测 Attestation of Global Compliance

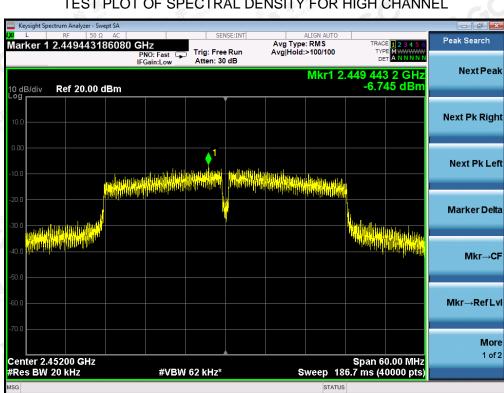

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL



Report No.: AGC00008180402FE05 Page 51 of 89

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Report No.: AGC00008180402FE05 Page 52 of 89

11.2. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

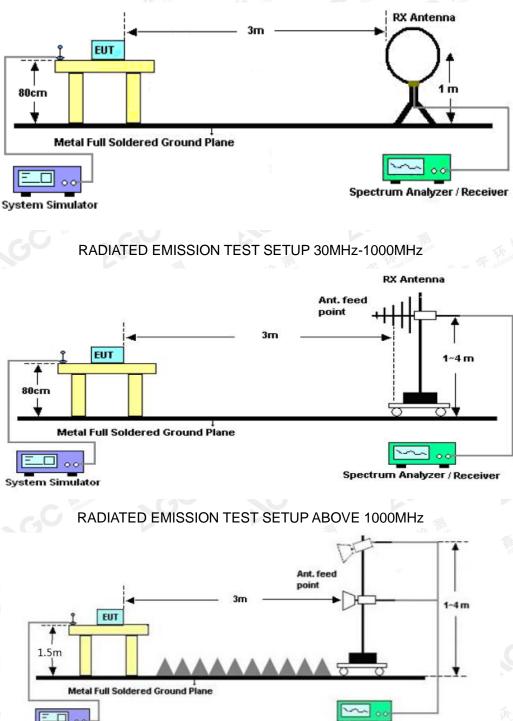

Spectrum Analyzer / Receiv

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.

Attestation of Global Compliance

stem Simulato

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(KHz)	300		
0.490~1.705	24000/F(KHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	5 3 S		
216~960	200	3		
Above 960	500	3		

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.






RADIATED EMISSION BELOW 1GHZ

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

dBuV/m 66.9

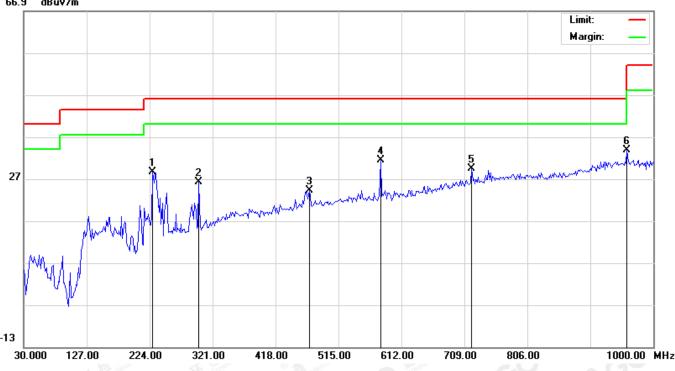

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		228.8500	16.81	11.83	28.64	46.00	-17.36	peak			
2		299.9833	10.76	15.41	26.17	46.00	-19.83	peak			
3		469.7333	3.34	20.80	24.14	46.00	-21.86	peak			
4		579.6667	8.82	22.63	31.45	46.00	-14.55	peak			
5		720.3167	3.62	25.78	29.40	46.00	-16.60	peak			
6	*	959.5833	3.92	29.91	33.83	46.00	-12.17	peak			


RESULT: PASS

鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC00008180402FE05 Page 55 of 89

Str Co.			Itin Itin
EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical



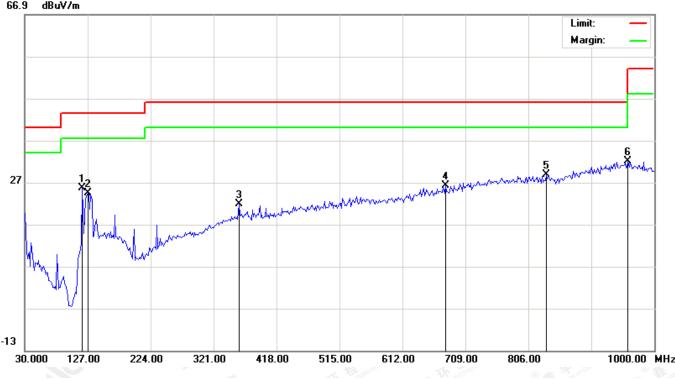

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		118.9167	19.36	6.32	25.68	43.50	-17.82	peak			
2		127.0000	14.68	9.78	24.46	43.50	-19.04	peak			
3		359.8000	2.95	18.80	21.75	46.00	-24.25	peak			
4		678.2833	1.55	24.61	26.16	46.00	-19.84	peak			
5		833.4833	1.47	27.31	28.78	46.00	-17.22	peak			
6	*	959.5833	2.13	29.91	32.04	46.00	-13.96	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.



Report No.: AGC00008180402FE05 Page 56 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

RADIATED EMISSION ABOVE 1GHZ

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4824.103	42.46	3.72	46.18	74	-27.82	peak
4824.039	38.75	3.72	42.47	54	-11.53	AVG
7236.061	40.82	8.15	48.97	74	-25.03	peak
7236.075	35.66	8.15	43.81	54	-10.19	AVG
Allesianon	B Thestation C	Attestar				litze
0						15 mance
emark:			lin:	Tr.	Complian	3 August Court
actor = Ante	enna Factor + Ca	able Loss – I	Pre-amplifier.	C Stanof Glow	C and a state of the state of t	ion of
actor = Ante	enna Factor + Ca	able Loss –	Pre-amplifier.	C The section of	And thesta	10.

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.078	43.49	3.72	47.21	74	-26.79	peak
4824.085	37.85	3.72	41.57	54	-12.43	AVG
7236.088	41.61	8.15	49.76	74	-24.24	peak
7236.025	35.54	8.15	43.69	54	-10.31	AVG
- Mence	F of Gobald B	ation of Glo	Alleste			
	testation P	,ttes				
emark:					45. 7	
actor = Ante	enna Factor + Ca	ble Loss –	Pre-amplifier.	The Tel plance	- FA al Comp	



环 检 鑫 宇 环 检 测 Attestation of Global Compliance 测

Report No.: AGC00008180402FE05 Page 57 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Horizontal

1117-	100	21 211	"al Col	14	Hobai	Attes
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.030	45.76	3.75	49.51	74	-24.49	peak
4874.031	40.98	3.75	44.73	54 🔬	-9.27	AVG
7311.109	39.63	8.16	47.79	74	-26.21	peak
7311.117	35.77	8.16	43.93	54	-10.07	AVG
TF.	Compart of all	14 M	Not Court	stant	Aller	
C atonoton	B An allon of Glow	(B) and the station of				
Remark:	Allest				100-	in the
-actor = Ante	enna Factor + Ca	ble Loss – F	Pre-amplifier.	A 1	12 pliance	The Compliant

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.045	46.76	3.75	50.51	74	-23.49	peak
4874.041	40.63	3.75 🔬	44.38	54	-9.62	AVG
7311.061	39.51	8.16	47.67	74	-26.33	peak
7311.083	34.27	8.16	42.43	54	-11.57	AVG
omplia. B		testato	60 3	6		
Remark:				HEL THE	The Party of	n ^{ce} ® Æ
actor = Ante	enna Eactor + Ca	hle Loss –	Pre-amplifier	El come	al clobal	Alle



环 检 鑫 测 Attestation of Global Compliance

Report No.: AGC00008180402FE05 Page 58 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Makua Tuma
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.114	45.35	3.81	49.16	74	-24.84	peak
4924.051	40.81	3.81	44.62	54 🔬	-9.38	AVG
7386.110	42.53	8.19	50.72	74	-23.28	peak
7386.051	36.76	8.19	44.95	54	-9.05	AVG
The state	Comput		Nop Cours	statu	Alles	
C anotonoton	C A Hon of Glou	C Anastation of		0		
Remark:	Autosu				lin:	in the
-actor = Ante	enna Factor + Ca	ble Loss – F	Pre-amplifier.	1	A Mance	The compliance

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Vertical

		In	The somplie	SN NO	C Bi	10000
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.070	43.53	3.81	47.34	74	-26.66	peak
4924.083	38.82	3.81	42.63	54	-11.37	AVG
7386.028	36.4	8.19	44.59	74	-29.41	peak
7386.106	31.74	8.19	39.93	54	-14.07	AVG
	The Compliance	The al Comp	C The address of Gov.	C Antonio	onc.	
0.5	of Globan ®	ation of C	Alles			
emark:			G I			
actor = Ante	enna Eactor + C	able Loss 🗕	Pre-amplifier			cult -

RESULT: PASS

Note:

Other emissions from 1G to 25 GHz are considered as ambient noise. No recording in the test report. Factor = Antenna Factor + Cable lss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.





12. BAND EDGE EMISSION

12.1. MEASUREMENT PROCEDURE

Radiated restricted band edge measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

12.2. TEST SET-UP

same as 11.2

Note:

1. Factor=Antenna Factor + Cable loss - Amplifier gain. Field Strength=Factor + Reading level

2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.



Report No.: AGC00008180402FE05 Page 60 of 89

12.3. TEST RESULT

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Horizontal

PK



AV



RESULT: PASS

Report No.: AGC00008180402FE05 Page 61 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Vertical

ΡK



AV



RESULT: PASS

Report No.: AGC00008180402FE05 Page 62 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Horizontal

ΡK



AV



RESULT: PASS

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Report No.: AGC00008180402FE05 Page 63 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Vertical

ΡK



AV



RESULT: PASS

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Report No.: AGC00008180402FE05 Page 64 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Horizontal

ΡK



AV



RESULT: PASS

Report No.: AGC00008180402FE05 Page 65 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Vertical

ΡK



AV




RESULT: PASS

Report No.: AGC00008180402FE05 Page 66 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Horizontal

ΡK

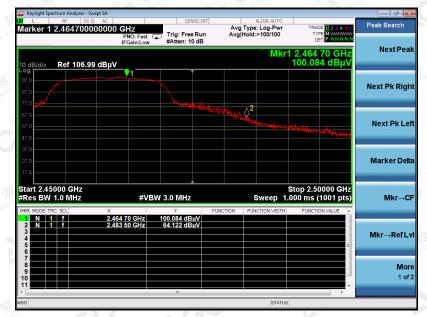

AV



RESULT: PASS

Report No.: AGC00008180402FE05 Page 67 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Vertical

ΡK







RESULT: PASS

Report No.: AGC00008180402FE05 Page 68 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity 55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Horizontal

ΡK



AV



RESULT: PASS

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Report No.: AGC00008180402FE05 Page 69 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Vertical

ΡK



AV



RESULT: PASS

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Report No.: AGC00008180402FE05 Page 70 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Horizontal

ΡK



AV



RESULT: PASS

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Report No.: AGC00008180402FE05 Page 71 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Vertical

ΡK



AV



RESULT: PASS

The results shows in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gett.com.

Report No.: AGC00008180402FE05 Page 72 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2422MHZ	Antenna	Horizontal

ΡK



AV



RESULT: PASS

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Report No.: AGC00008180402FE05 Page 73 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2422MHZ	Antenna	Vertical

ΡK



AV



RESULT: PASS

Report No.: AGC00008180402FE05 Page 74 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003	
Temperature	25°C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11n 40with data rate 13.5 2452MHZ	Antenna	Horizontal	

ΡK



AV



RESULT: PASS

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gent.com.

Report No.: AGC00008180402FE05 Page 75 of 89

EUT	WiFi Borescope Camera	Model Name	GD9003
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2452MHZ	Antenna	Vertical

ΡK



AV



RESULT: PASS

The results shows in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gett.com.

13. FCC LINE CONDUCTED EMISSION TEST

13.1. LIMITS OF LINE CONDUCTED EMISSION TEST


Frominant	Maximum RF Line Voltage				
Frequency	Q.P.(dBuV)	Average(dBuV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60 60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

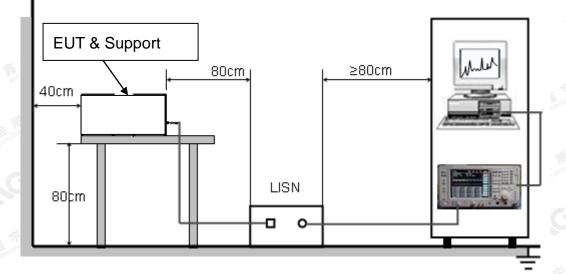



Report No.: AGC00008180402FE05 Page 77 of 89

13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC9V/1A power from a LISN, if any.
- 5. The EUT received DC charging voltage by PC which received 9V/1Azpower by a LISN..
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.





Report No.: AGC00008180402FE05 Page 78 of 89

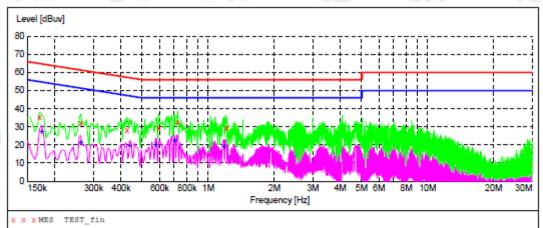

13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

MEASUREMENT RESULT:

Frequency MHz	Level dBuv	Transd dB		Margin dB	Detector	Line	PE
0.170000	35.50	10.0	65	29.5	QP	Ll	FLO
0.262000	31.80	10.1	61	29.6	QP	Ll	FLO
0.426000	28.40	10.0	57	28.9	QP	Ll	FLO
0.594000	29.50	9.9	56	26.5	QP	Ll	FLO
0.726000	32.40	9.9	56	23.6	QP	Ll	FLO
1.206000	29.10	10.1	56	26.9	QP	L1	FLO


MEASUREMENT RESULT:

Frequency MHz	Level dBuv	Transd dB		Margin dB	Detector	Line	PE
0.174000	27.70	10.0	55	27.1	AV	L1	FLO
0.262000	21.40	10.1	51	30.0		L1	FLO
0.438000	20.10	10.0	47	27.0		L1	FLO
0.574000	20.40	9.9	46	25.6		L1	FLO
0.702000	22.60	9.9	46	23.4		L1	FLO
1.178000	19.30	10.1	46	26.7		L1	FLO





Report No.: AGC00008180402FE05 Page 79 of 89

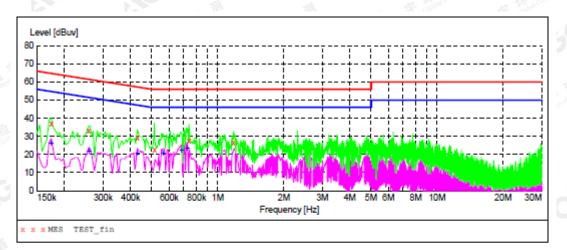

Line Conducted Emission Test Line 2-N

MEASUREMENT RESULT:

Frequency MHz	Level dBuv		Limit dB uv	Margin dB	Detector	Line	PE
0.174000 0.258000 0.430000 0.514000 0.738000 1.178000	36.90 33.00 29.10 22.40 27.50 26.40	10.0 10.1 10.0 9.9 10.0 10.1	57 56	28.5 28.2 33.6 28.5	QP QP QP	N N N N N	FLO FLO FLO FLO FLO FLO

MEASUREMENT RESULT:

Frequency MHz	Level dBuv	Transd dB	Limit dBuv	Margin dB	Detector	Line	PE
0.174000	26.60	10.0	55	28.2	AV	N	FLO
0.258000	22.20	10.1	52	29.3	AV	N	FLO
0.430000	20.80	10.0	47	26.5	AV	N	FLO
0.562000	21.00	9.9	46	25.0	AV	N	FLO
0.682000	22.70	9.9	46	23.3	AV	N	FLO
0.726000	24.00	9.9	46	22.0	AV	N	FLO

RESULT: PASS


Note: All the test modes had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.






Report No.: AGC00008180402FE05 Page 80 of 89

APPENDIX A: PHOTOGRAPHS OF TEST SETUP FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

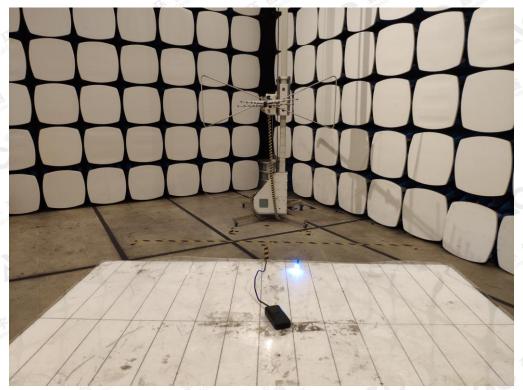

FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ

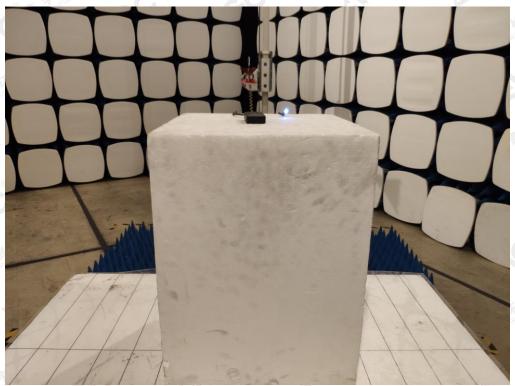

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.



Report No.: AGC00008180402FE05 Page 81 of 89



CONDUCTED EMISSION TEST SETUP





Report No.: AGC00008180402FE05 Page 82 of 89



APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT





Report No.: AGC00008180402FE05 Page 83 of 89



BOTTOM VIEW OF EUT

FRONT VIEW OF EUT





Report No.: AGC00008180402FE05 Page 84 of 89

BACK VIEW OF EUT



LEFT VIEW OF EUT



The results showed has been report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gett.com.



Report No.: AGC00008180402FE05 Page 85 of 89

RIGHT VIEW OF EUT



OPEN VIEW-1 OF EUT




The results shows in this report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.




Report No.: AGC00008180402FE05 Page 86 of 89

INTERNAL VIEW-1 OF EUT

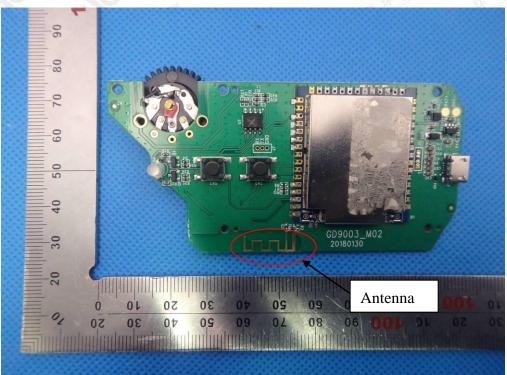

INTERNAL VIEW-2 OF EUT

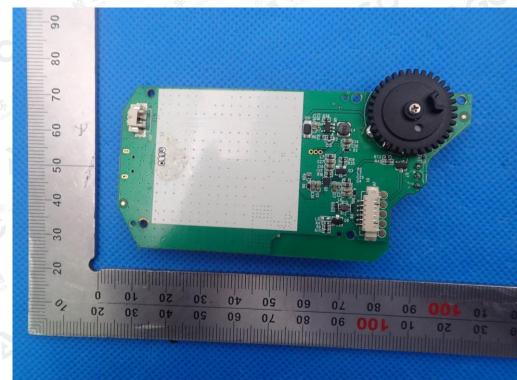







Report No.: AGC00008180402FE05 Page 87 of 89

INTERNAL VIEW-3 OF EUT

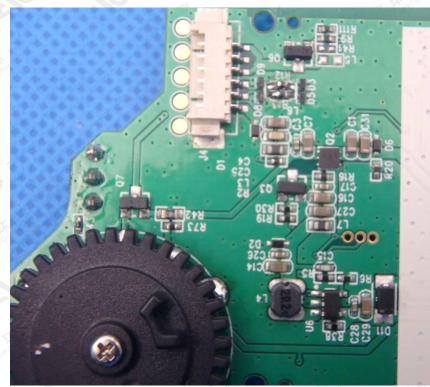

INTERNAL VIEW-4 OF EUT

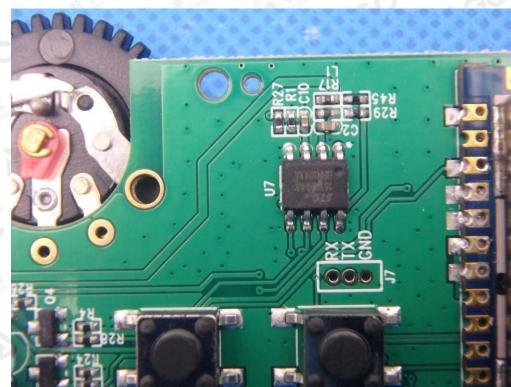


The results show with this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc?gett.com.




Report No.: AGC00008180402FE05 Page 88 of 89

INTERNAL VIEW-5 OF EUT

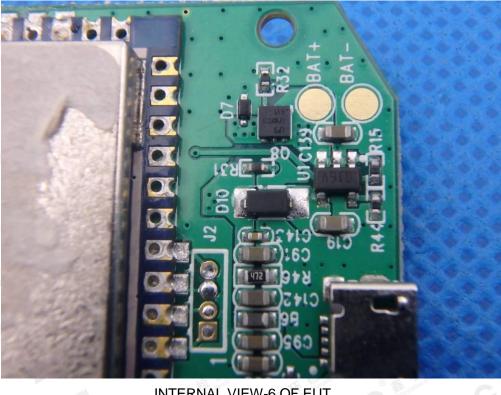


INTERNAL VIEW-6 OF EUT

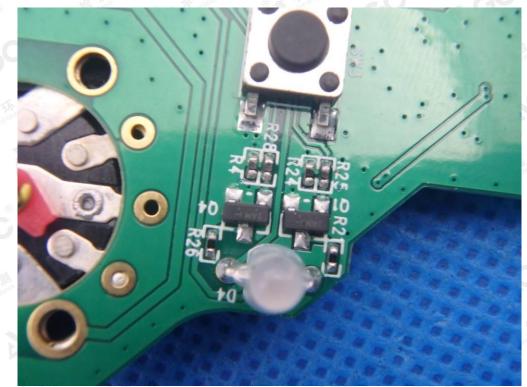



Report No.: AGC00008180402FE05 Page 89 of 89

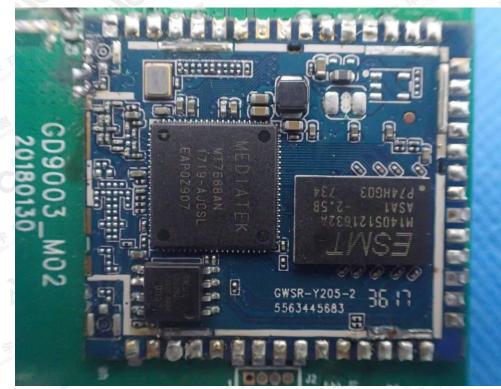

INTERNAL VIEW-7 OF EUT

----END OF REPORT----

