

FCC RADIO TEST REPORT

According to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : 802.11 abgn(1X1)+Bluetooth(2.1)module
Brand Name : DT Research Inc.
Model No. : DT430
Filing Type : New Application
Applicant : Summit Data Communications, Inc.
Manufacturer : 526 South Main St. Suite 805 Akron, OH 44311
FCC ID : TWG-SDCMSD40NBT
Received Date : May 30, 2012
Final Test Date : Aug. 20, 2012

Statement

Test result included is only for the Bluetooth part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

Table of Contents

1 SUMMARY OF THE TEST RESULT	2
2 GENERAL INFORMATION.....	3
2.1 Product Details.....	3
2.2 Accessories.....	3
2.3 Table for Filed Antenna.....	3
2.4 Table for Carrier Frequencies	4
2.5 Table for Test Modes	4
2.6 Table for Testing Locations.....	4
2.7 Table for Supporting Units	4
2.8 EUT Operation during Test	4
2.9 Test Configurations	5
3 TEST RESULT	7
3.1 AC Power Line Conducted Emissions Measurement	7
3.2 Radiated Emissions Measurement	11
3.3 Band Edge and Fundamental Emissions Measurement.....	23
3.4 Antenna Requirements	27
4 LIST OF MEASURING EQUIPMENTS.....	28
5 TEST LOCATION.....	29
6 TAF CERTIFICATE OF ACCREDITATION.....	30
APPENDIX A. TEST PHOTOS	A1 ~ A6
APPENDIX B. PHOTOGRAPHS OF EUT	B1 ~ B26

History of This Test Report

Original Issue Date: Aug. 28, 2012

Report No.: FR260551AD

■ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

According to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : 802.11 abgn(1X1)+Bluetooth(2.1)module


Brand Name : DT Research Inc.

Model No. : DT430

Applicant : Summit Data Communications, Inc.

526 South Main St. Suite 805 Akron, OH 44311

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 30, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

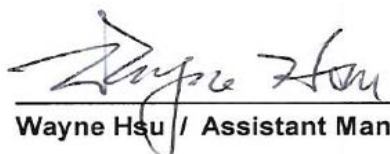

Wayne Hsu / Assistant Manager

SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	3.02 dB
-	15.247(b)(1)	Peak Output Power	Complies	-
-	15.247(a)(1)	Hopping Channel Separation	Complies	-
-	15.247(b)(1)	Number of Hopping Frequency	Complies	-
-	15.247(a)(1)	Dwell Time	Complies	-
3.2	15.247(d)	Radiated Emissions	Complies	5.75 dB
3.3	15.247(d)	Band Edge Emissions	Complies	1.36 dB
3.4	15.203	Antenna Requirements	Complies	-

Note: Standard clause 15.247(b)(1), 15.247(a)(1) have been done module test by Summit / SDC-MSD40NBT.

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Peak Output Power	±0.8dB	Confidence levels of 95%
Hopping Channel Separation	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7℃	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2 GENERAL INFORMATION

2.1 Product Details

Only the radio detail of Bluetooth is shown in this report. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	From 5V adapter
Modulation	FHSS (GFSK/ $\pi/4$ -DQPSK/ 8DPSK)
Data Rate (Mbps)	GFSK: 1/ $\pi/4$ -DQPSK: 2/ 8DPSK: 3
Frequency Range	2400 ~ 2483.5MHz
Channel Number	79

2.2 Accessories

Accessories Information				
AC Adapter	Brand Name	L.T.E.	Model Name	LTE18W-S1
	Power Rating	I/P: 100-240Vac, 50/60Hz, 0.5A; O/P: 5Vdc 3A, MAX:15W		

Note: Regarding to more detail and other information, please refer to user manual.

2.3 Table for Filed Antenna

Antenna Category (Ant. Cat.)	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided ; <input type="checkbox"/> No temporary RF connector provided

Antenna General Information									
Antenna Port (Total 2 Port)					1(TX/RX)				
Maximum RF Output Power Level (PL)					1				
Transmit Chains Power Distribution					<input checked="" type="checkbox"/> symmetrical distribution <input type="checkbox"/> asymmetrical distribution				
Ant. No.	PL	Ant. Port [Ant No. X connect to Ant. Port Y]	Ant. Cat.	Ant. Type	Brand	Model	G _{ANT} (dBi)	DG (dBi) [correlated] N _{TX} = 1	DG (dBi) [uncorrelated] N _{TX} = 2
1	1	1	Integral	PCB	--	--	1.7	N/A	1.7
Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows: Any transmit signals are correlated, Directional Gain (DG) = $G_{ANT} + 10 \log(N)$ dBi All transmit signals are completely uncorrelated, Directional Gain (DG) = G_{ANT} Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows: Any transmit signals are correlated, Directional Gain (DG) = $10 \log[(10^{G_{1/20}} + 10^{G_{2/20}} + \dots + 10^{G_{N/20}})^2 / N]$ dBi All transmit signals are completely uncorrelated, Directional Gain (DG) = $10 \log[(10^{G_{1/10}} + 10^{G_{2/10}} + \dots + 10^{G_{N/10}}) / N]$ dBi									

2.4 Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz
	1	2403 MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

2.5 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
AC Power Conducted Emissions	Transmitting Mode	-	-
Radiated Emissions Below 1GHz	Transmitting Mode	1 Mbps	-
Radiated Emissions Above 1GHz	GFSK	1 Mbps/2 Mbps/3 Mbps	0/39/78
Fundamental Emissions	GFSK/ $\pi/4$ -DQPSK/ 8DPSK	1 Mbps	0/39/78

2.6 Table for Testing Locations

Test Site No.	Site Category	Location
CO04-HY	Conduction	Hwa Ya
03CH02-HY	SAC	Hwa Ya

Semi Anechoic Chamber (SAC).

2.7 Table for Supporting Units

The EUT was tested alone.


2.8 EUT Operation during Test

The program was executed as follows:


- Executed "sru-BT" to keep transmitting signals at fixed frequency.

2.9 Test Configurations


For conducted emissions

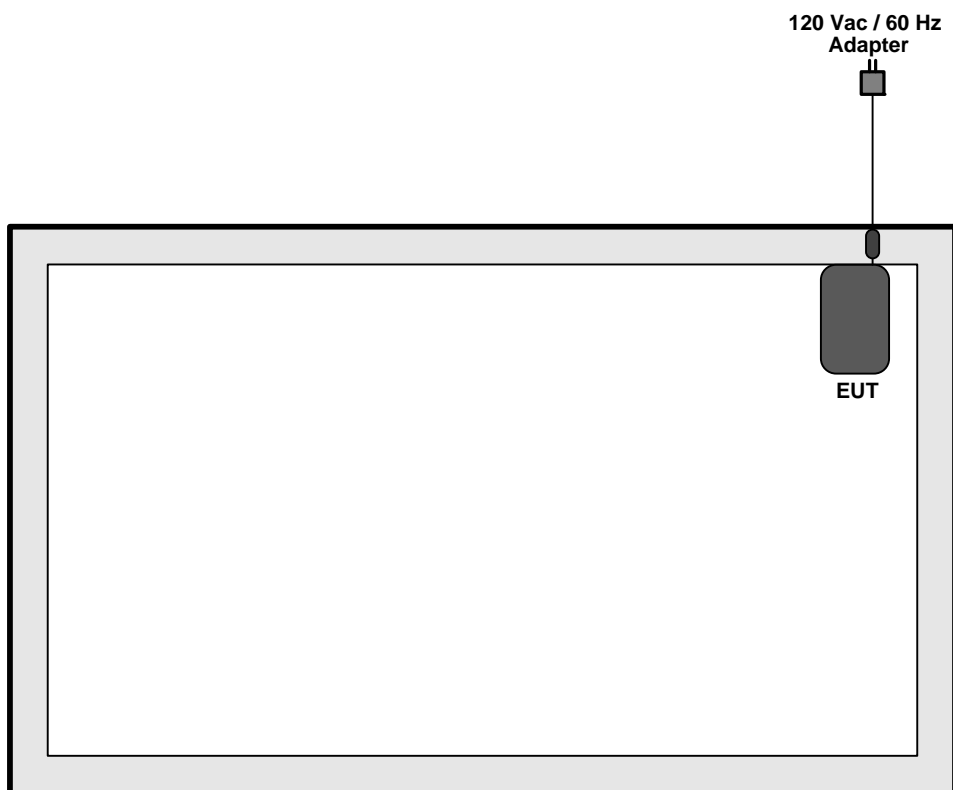

For radiated emissions 9kHz~1GHz

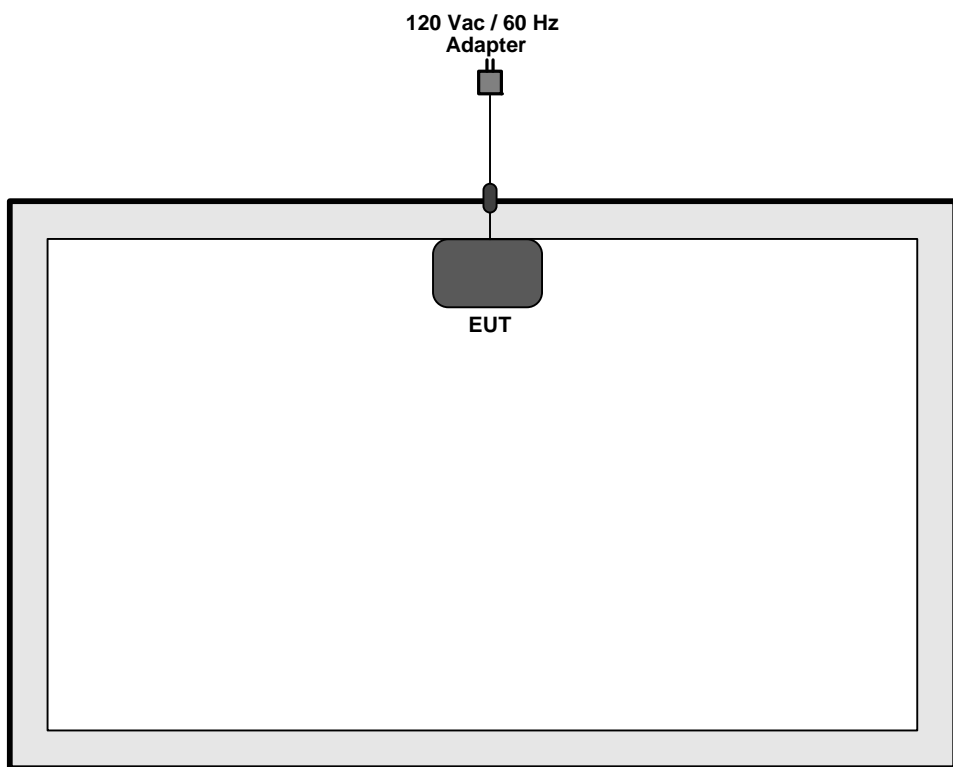

For radiated emissions above 1GHz

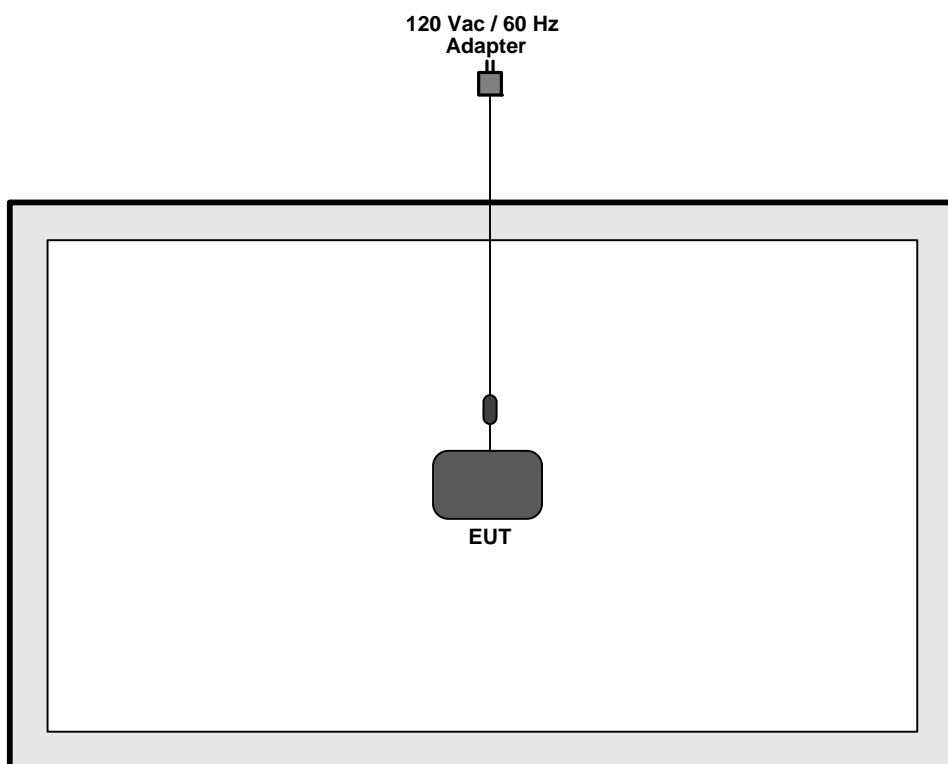

3 TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3 Test Procedures

1. The EUT was warmed up for 15 minutes before testing started.
2. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connect to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The CISPR states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

3.1.4 Test Setup Layout

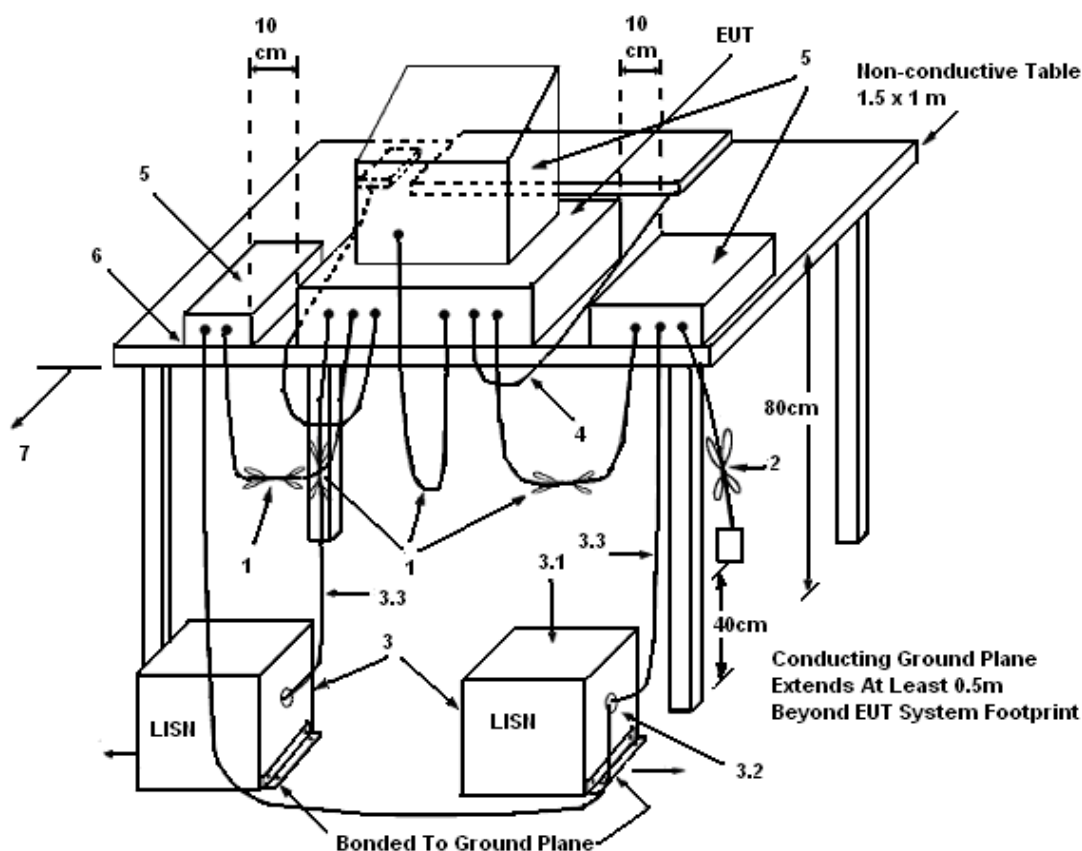

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in transmitting mode.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


Final Test Date	Aug. 20, 2012	Test Site No.	CO04-HY
Temperature	26.1°C	Humidity	49%
Test Engineer	Bill	Configuration	Transmitting Mode

Line

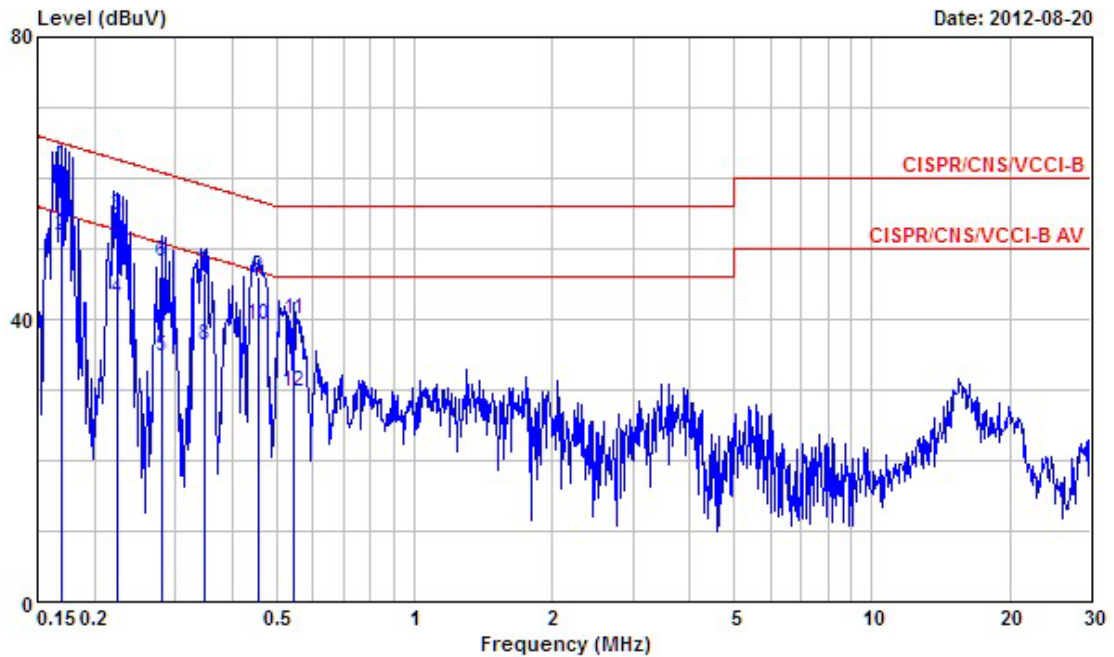

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1694400	61.97	-3.02	64.99	61.34	0.24	0.39	QP
2	0.1694400	51.83	-3.16	54.99	51.20	0.24	0.39	Average
3	0.2231870	54.62	-8.08	62.70	54.07	0.23	0.32	QP
4	0.2231870	42.80	-9.90	52.70	42.25	0.23	0.32	Average
5	0.2802930	34.85	-15.96	50.81	34.27	0.23	0.35	Average
6	0.2802930	48.23	-12.58	60.81	47.65	0.23	0.35	QP
7	0.3480120	46.45	-12.56	59.01	45.85	0.22	0.38	QP
8	0.3480120	36.38	-12.63	49.01	35.78	0.22	0.38	Average
9	0.4563600	46.09	-10.67	56.76	45.48	0.22	0.39	QP
10	0.4563600	39.33	-7.43	46.76	38.72	0.22	0.39	Average
11	0.5464400	39.94	-16.06	56.00	39.35	0.22	0.37	QP
12	0.5464400	29.74	-16.26	46.00	29.15	0.22	0.37	Average

Neutral

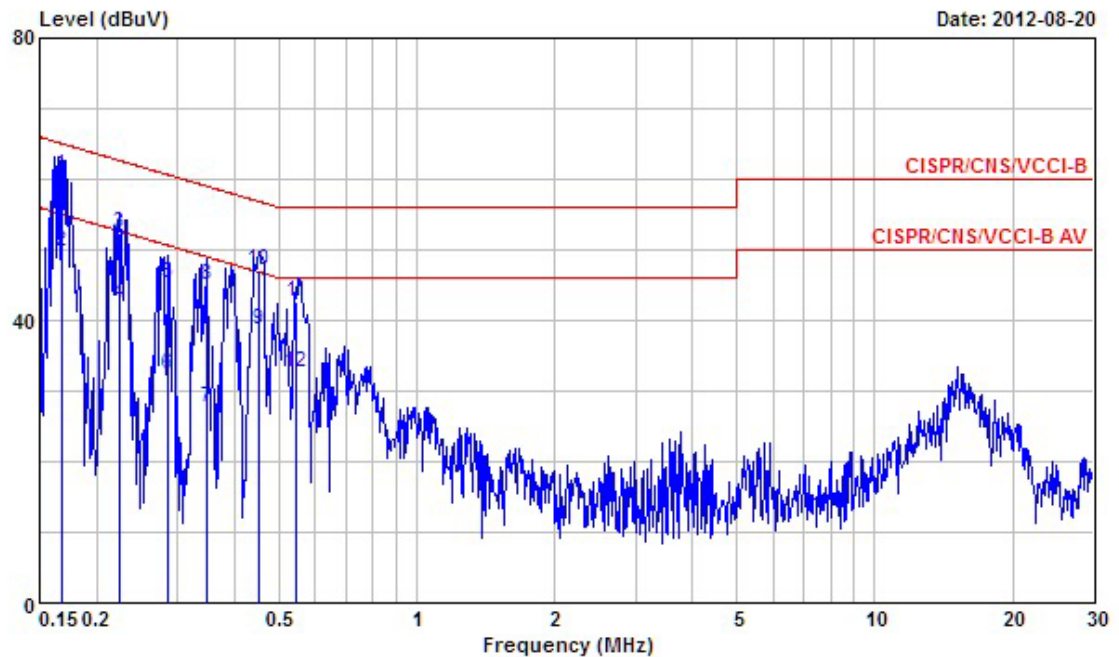

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	@0.1676540	60.42	-4.66	65.08	59.91	0.11	0.40	QP
2	@0.1676540	49.67	-5.41	55.08	49.16	0.11	0.40	Average
3	0.2231870	52.49	-10.21	62.70	52.06	0.11	0.32	QP
4	0.2231870	42.24	-10.46	52.70	41.81	0.11	0.32	Average
5	0.2847840	45.22	-15.46	60.68	44.77	0.10	0.35	QP
6	0.2847840	32.32	-18.36	50.68	31.87	0.10	0.35	Average
7	0.3464610	27.74	-21.31	49.05	27.26	0.10	0.38	Average
8	0.3464610	45.02	-14.03	59.05	44.54	0.10	0.38	QP
9	@0.4515500	38.78	-8.07	46.85	38.29	0.10	0.39	Average
10	@0.4515500	47.21	-9.64	56.85	46.72	0.10	0.39	QP
11	0.5465430	42.59	-13.41	56.00	42.12	0.10	0.37	QP
12	0.5465430	32.70	-13.30	46.00	32.23	0.10	0.37	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

3.2 Radiated Emissions Measurement

3.2.1 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.2.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.2.4 Test Setup Layout

For radiated emissions below 30MHz

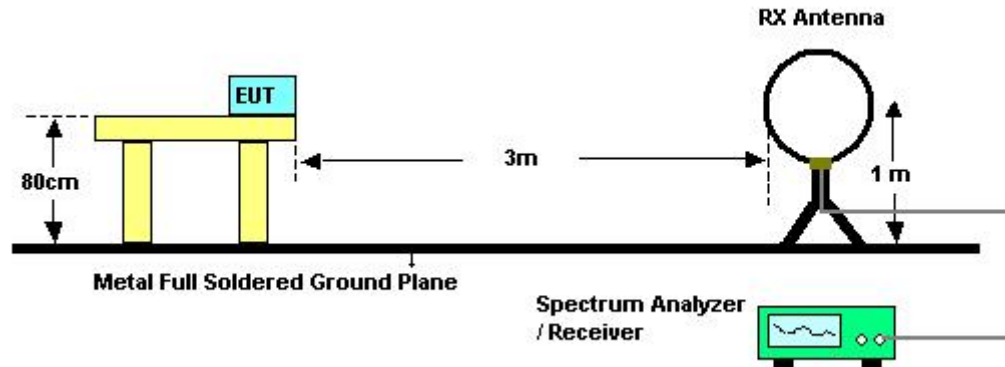

For radiated emissions above 30MHz

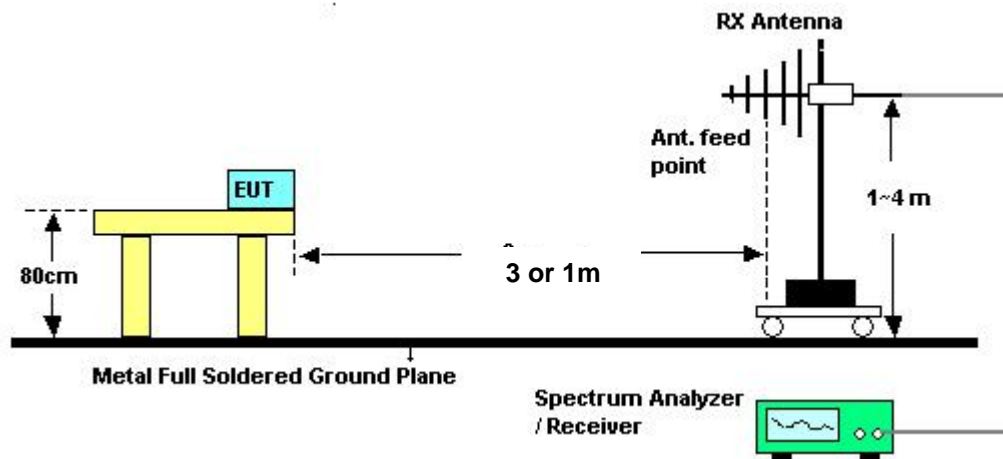

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Results of Radiated Emissions (9kHz~30MHz)

Final Test Date	Aug. 08, 2012	Test Site No.	03CH02-HY
Temperature	24.6℃	Humidity	61%
Test Engineer	Hsiao		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


3.2.8 Results of Radiated Emissions (30MHz~1GHz)

Final Test Date	Aug. 08, 2012	Test Site No.	03CH02-HY
Temperature	24.6℃	Humidity	61%
Test Engineer	Hsiao	Configuration	Channel 39

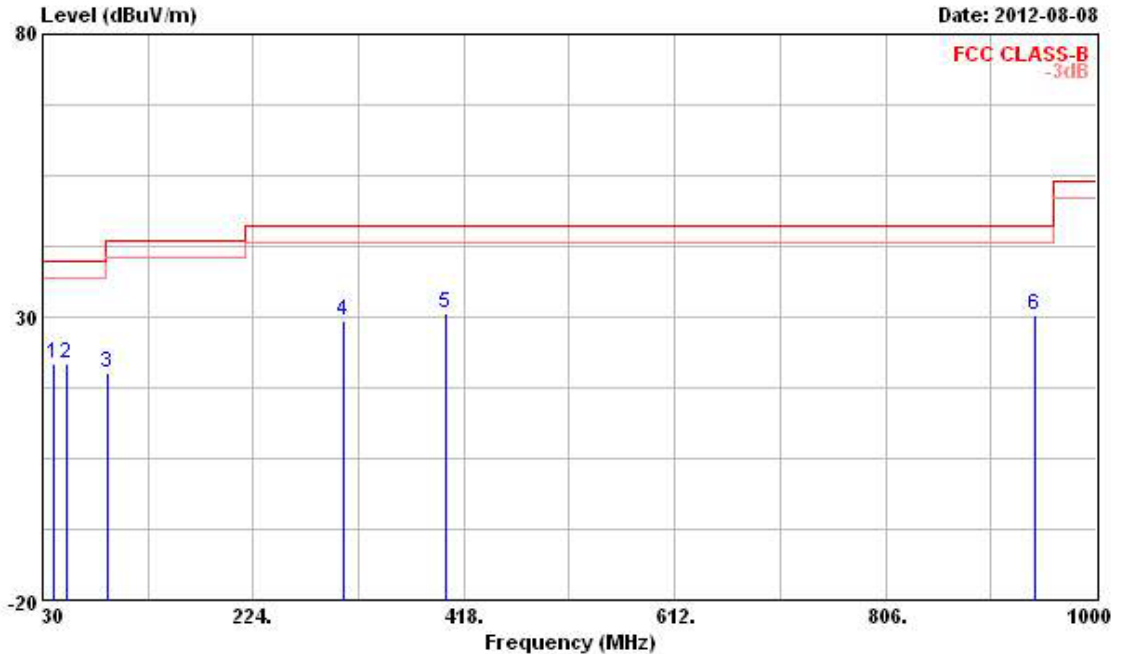Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	40.670	21.91	-18.09	40.00	35.75	13.01	1.05	27.90	Peak	---	---
2	52.310	21.69	-18.31	40.00	39.38	8.94	1.22	27.85	Peak	---	---
3	90.140	20.23	-23.27	43.50	37.00	9.50	1.58	27.85	Peak	---	---
4	307.420	29.20	-16.80	46.00	39.60	13.82	3.00	27.22	Peak	---	---
5	400.540	30.62	-15.38	46.00	39.83	15.27	3.40	27.88	Peak	---	---
6	943.740	30.41	-15.59	46.00	31.24	21.11	5.50	27.44	Peak	---	---

Vertical

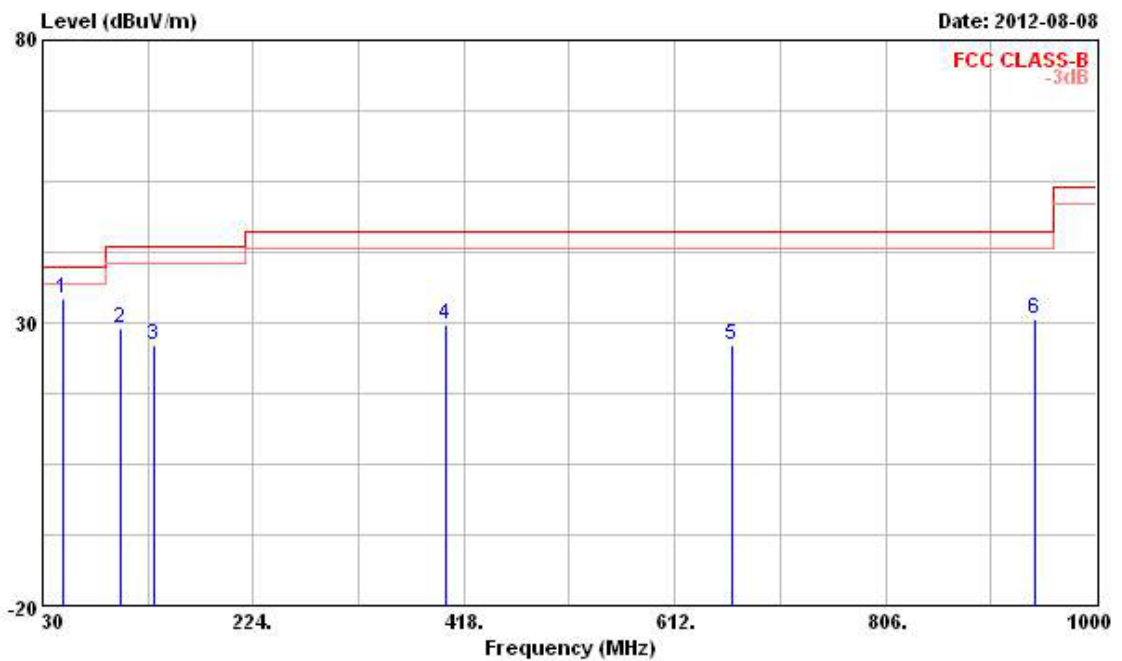

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	48.430	34.25	-5.75	40.00	50.61	10.34	1.16	27.86	Peak	---	---
2	101.780	29.03	-14.47	43.50	43.78	11.41	1.68	27.84	Peak	---	---
3	132.820	26.16	-17.34	43.50	39.38	12.57	1.92	27.71	Peak	---	---
4	400.540	29.58	-16.42	46.00	38.79	15.27	3.40	27.88	Peak	---	---
5	665.350	26.16	-19.84	46.00	30.75	19.31	4.44	28.34	Peak	---	---
6	943.740	30.59	-15.41	46.00	31.42	21.11	5.50	27.44	Peak	---	---

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.2.9 Results for Radiated Emissions (1GHz~10th Harmonic)


Final Test Date	Aug. 08, 2012	Test Site No.	03CH02-HY
Temperature	24.6℃	Humidity	61%
Test Engineer	Hsiao	Configuration	Channel 0

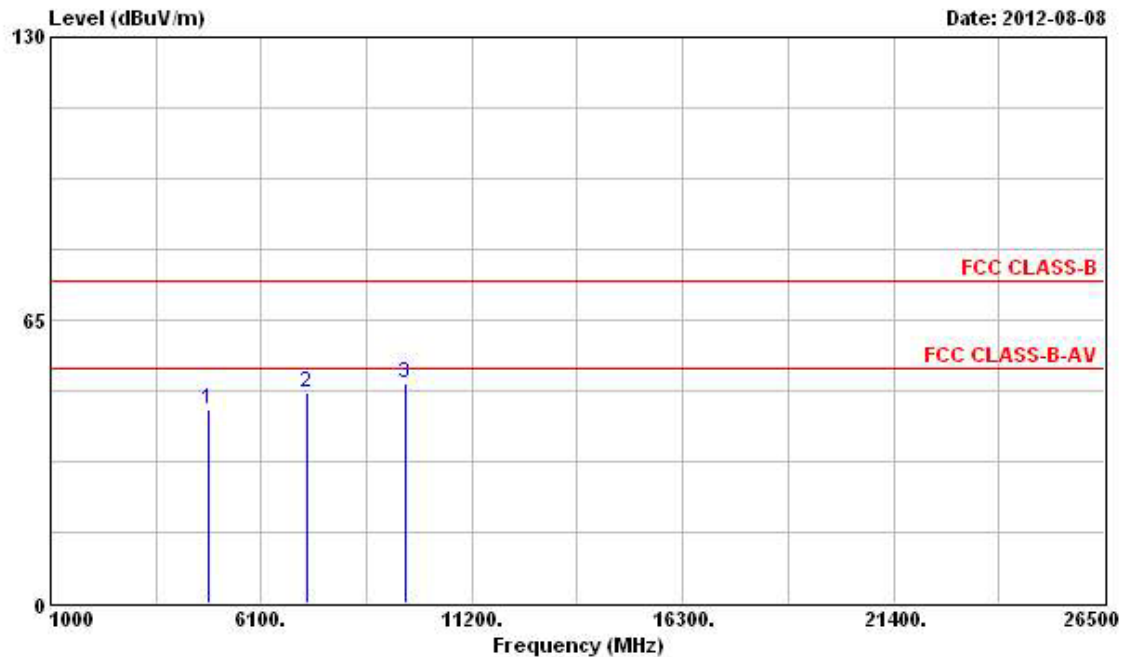Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4804.000	44.26	-9.74	54.00	38.75	35.73	4.58	34.80 PK	---	---
2	7206.000	48.31			39.92	37.84	5.62	35.07 Peak	---	---
3	9608.000	50.62			40.43	39.32	6.34	35.47 Peak	---	---

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Vertical

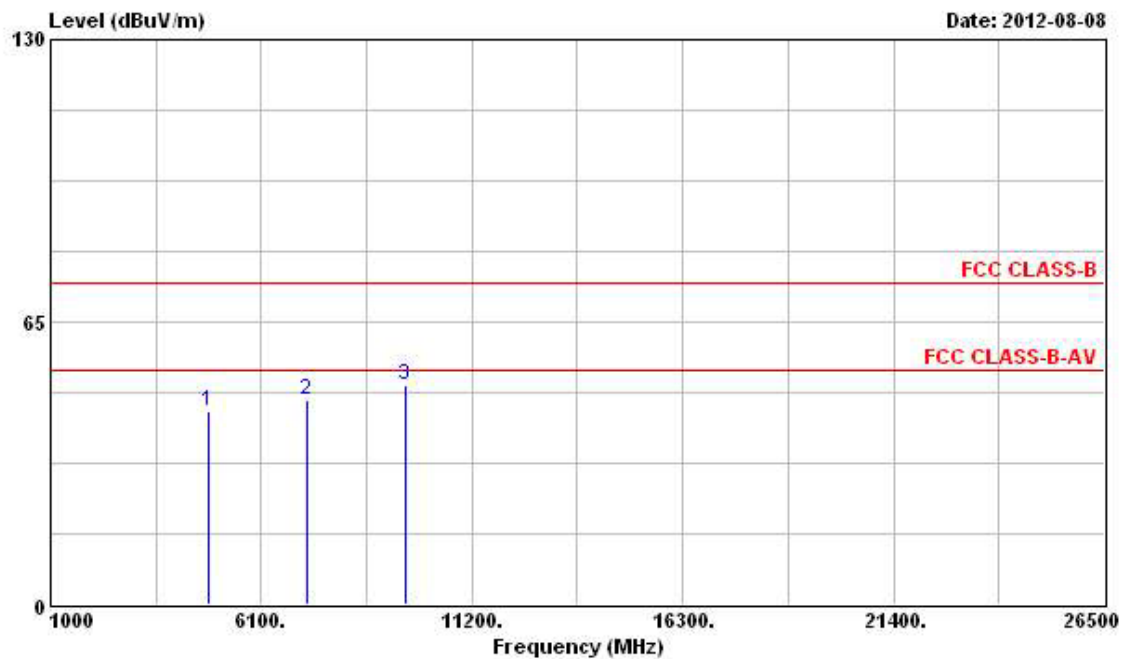

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4804.000	44.42	-9.58	54.00	39.53	35.11	4.58	34.80	PK	---	---
2	7206.000	46.99			39.56	36.88	5.62	35.07	Peak	---	---
3	9608.000	50.30			40.91	38.52	6.34	35.47	Peak	---	---

Note: The items 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Final Test Date	Aug. 08, 2012	Test Site No.	03CH02-HY
Temperature	24.6°C	Humidity	61%
Test Engineer	Hsiao	Configuration	Channel 39

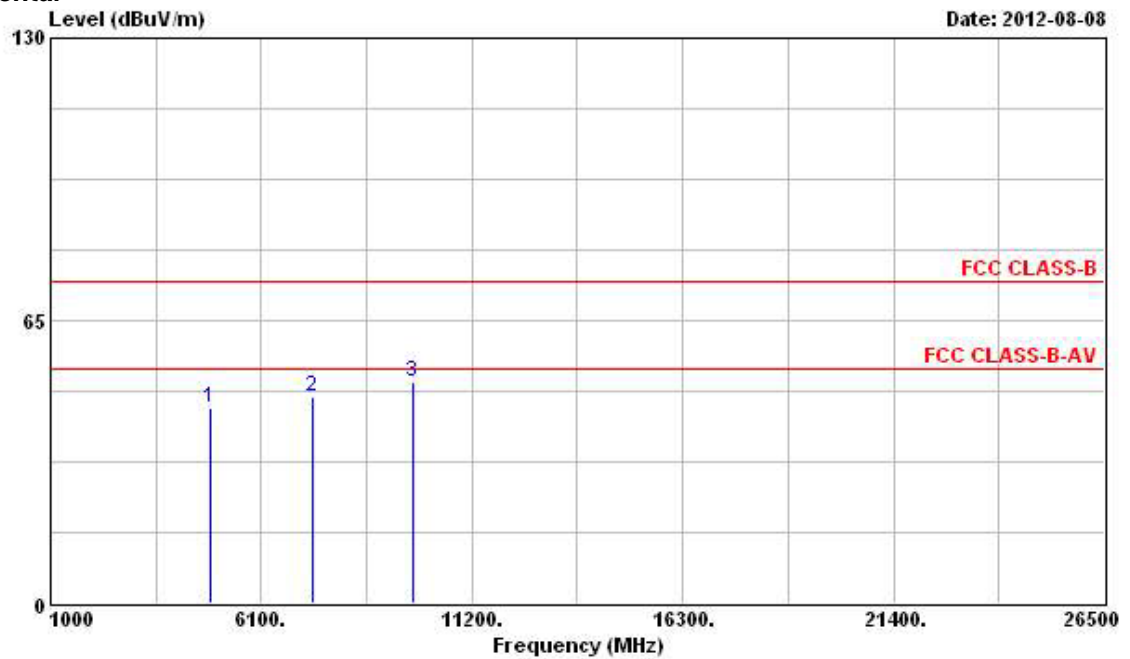Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4882.000	44.71	-9.29	54.00	39.02	35.83	4.64	34.78	PK	---	---
2	7323.000	47.41	-6.59	54.00	39.00	37.87	5.64	35.10	PK	---	---
3	9764.000	50.81			40.40	39.53	6.36	35.48	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Vertical

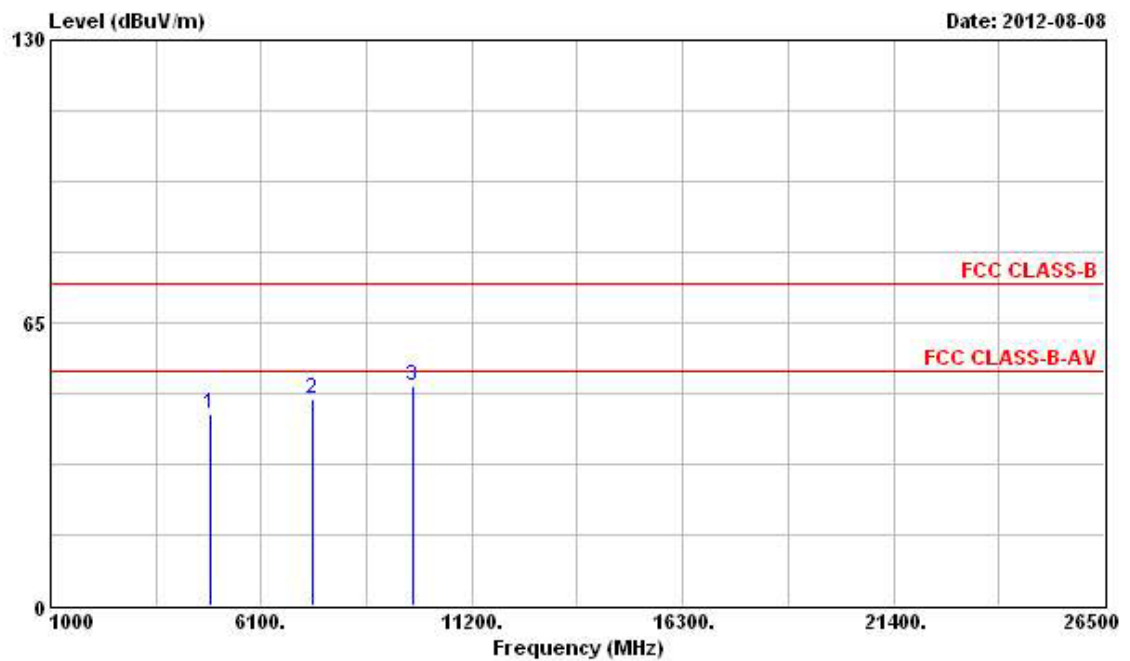

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4882.000	44.17	-9.83	54.00	39.13	35.18	4.64	34.78	PK	---	---
2	7323.000	47.67	-6.33	54.00	40.20	36.93	5.64	35.10	PK	---	---
3	9764.000	50.61			41.00	38.73	6.36	35.48	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Final Test Date	Aug. 08, 2012	Test Site No.	03CH02-HY
Temperature	24.6°C	Humidity	61%
Test Engineer	Hsiao	Configuration	Channel 78

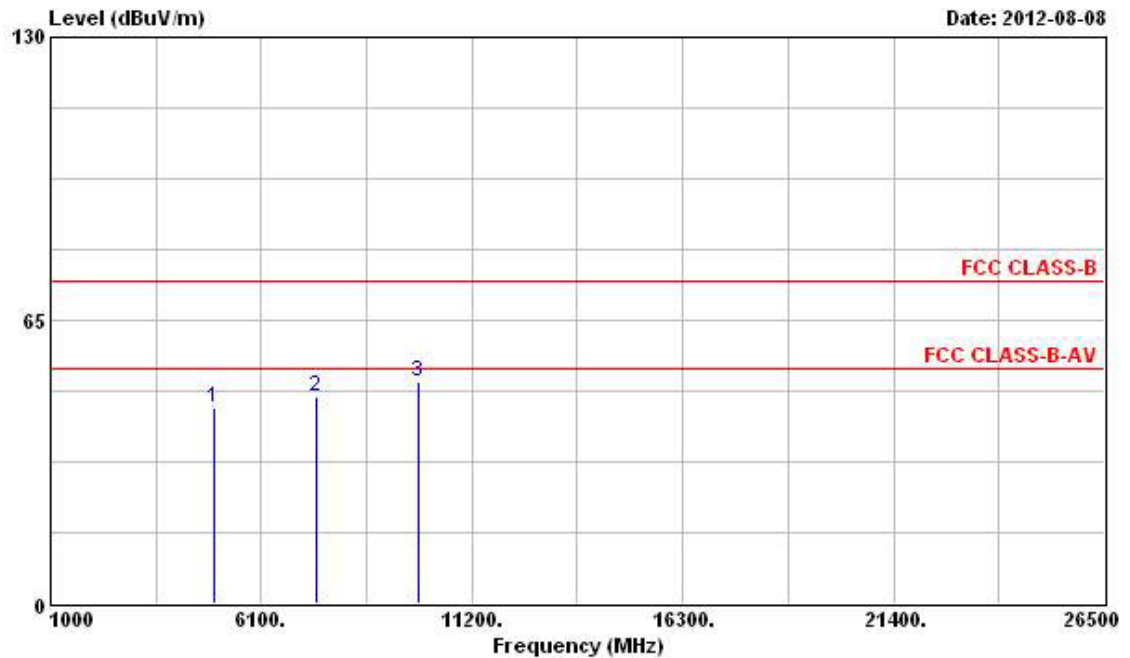Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4960.000	44.72	-9.28	54.00	38.82	35.95	4.71	34.76	PK	---	---
2	7440.000	47.39	-6.61	54.00	38.99	37.89	5.65	35.14	PK	---	---
3	9920.000	50.92			40.30	39.72	6.39	35.49	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).

Vertical

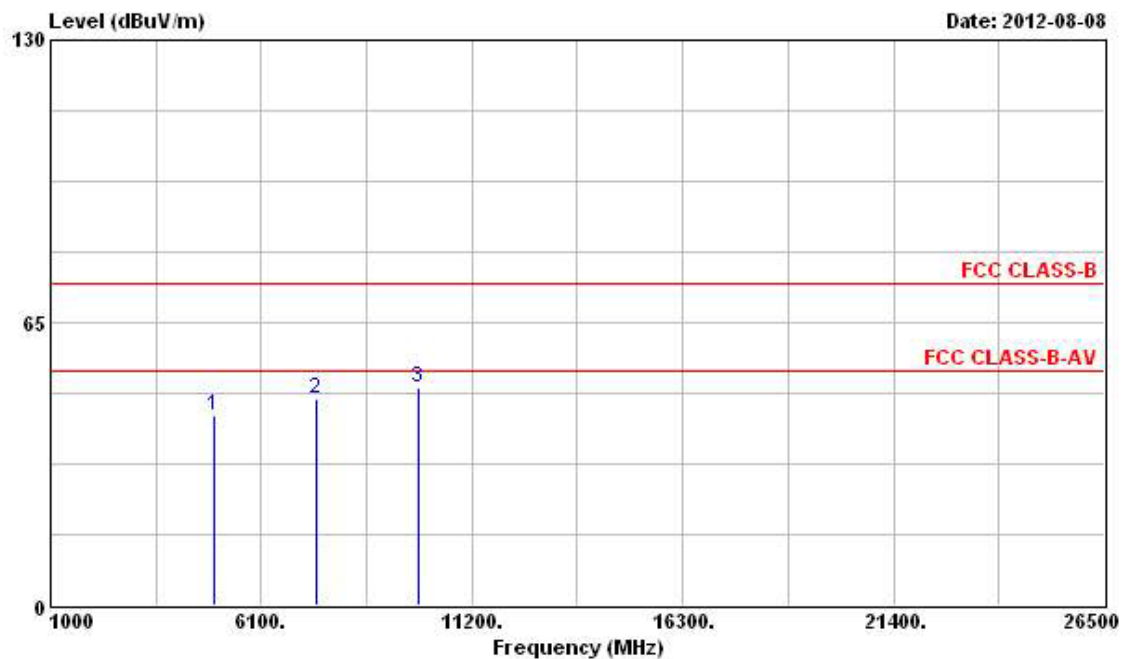

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4960.000	43.70	-10.30	54.00	38.48	35.27	4.71	34.76	PK	---	---
2	7440.000	47.46	-6.54	54.00	39.97	36.98	5.65	35.14	PK	---	---
3	9920.000	50.09			40.27	38.92	6.39	35.49	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).

The amplitude of spurious emissions, which are attenuated by more than 20dB below, the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.3 Band Edge and Fundamental Emissions Measurement

3.3.1 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.3.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak

3.3.3 Test Procedures

1. The test procedure is the same as section 3.5.3, only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

3.3.4 Test Setup Layout

This test setup layout is the same as that shown in section 3.6.4.

3.3.5 Test Deviation

There is no deviation with the original standard.

3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of Band Edge and Fundamental Emissions

Final Test Date	Aug. 08, 2012	Test Site No.	03CH02-HY
Temperature	24.6℃	Humidity	61%
Test Engineer	Streak	Configurations	Channel 0, 39, 78

1Mbps

Channel 0

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2389.870	47.03	-6.97	54.00	12.22	31.79	3.02	0.00	Average	---	---
2	2402.000	93.25			58.44	31.79	3.02	0.00	Average	---	---
1	2389.360	60.35	-13.65	74.00	25.54	31.79	3.02	0.00	Peak	---	---
2	2402.110	94.23			59.42	31.79	3.02	0.00	Peak	---	---

The item 2 is Fundamental Emissions.

Channel 39

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2441.100	94.21			59.17	31.99	3.05	0.00	Average	---	---
1	2441.100	95.31			60.27	31.99	3.05	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Channel 78

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2480.000	95.35			60.14	32.13	3.08	0.00	Average	---	---
2	2483.940	48.59	-5.41	54.00	13.38	32.13	3.08	0.00	Average	---	---
1	2480.000	96.31			61.10	32.13	3.08	0.00	Peak	---	---
2	2483.690	72.64	-1.36	74.00	37.43	32.13	3.08	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**2Mbps
Channel 0**

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2388.540	46.89	-7.11	54.00	12.08	31.79	3.02	0.00	Average	---	---
2 @	2402.000	90.90			56.09	31.79	3.02	0.00	Average	---	---
1	2350.190	59.81	-14.19	74.00	25.24	31.58	2.99	0.00	Peak	---	---
2 @	2402.110	93.23			58.42	31.79	3.02	0.00	Peak	---	---

The item 2 is Fundamental Emissions.

Channel 39

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2441.100	91.53			56.49	31.99	3.05	0.00	Average	---	---
1 @	2441.100	95.97			60.93	31.99	3.05	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Channel 78

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2480.000	92.43			57.22	32.13	3.08	0.00	Average	---	---
2 @	2484.270	48.28	-5.72	54.00	13.07	32.13	3.08	0.00	Average	---	---
1 @	2480.090	96.91			61.70	32.13	3.08	0.00	Peak	---	---
2 @	2484.600	72.09	-1.91	74.00	36.88	32.13	3.08	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**3Mbps
Channel 0**

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2358.860	46.87	-7.13	54.00	12.23	31.65	2.99	0.00	Average	---	---
2 @	2402.110	90.41			55.60	31.79	3.02	0.00	Average	---	---
1	2382.010	59.89	-14.11	74.00	25.18	31.72	2.99	0.00	Peak	---	---
2 @	2402.110	95.02			60.21	31.79	3.02	0.00	Peak	---	---

The item 2 is Fundamental Emissions.

Channel 39

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2441.100	91.56			56.52	31.99	3.05	0.00	Average	---	---
1 @	2441.100	96.17			61.13	31.99	3.05	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Channel 78

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2480.000	91.98			56.77	32.13	3.08	0.00	Average	---	---
2	2488.530	47.83	-6.17	54.00	12.55	32.20	3.08	0.00	Average	---	---
1 @	2480.000	96.58			61.37	32.13	3.08	0.00	Peak	---	---
2 @	2485.580	71.32	-2.68	74.00	36.11	32.13	3.08	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.4 Antenna Requirements

3.4.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.4.2 Antenna Connector Construction

Please refer to section 2.3 in this test report; antenna connector complied with the requirements.

4 LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 23, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Feb. 08, 2012	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz ~ 30MHz	Apr. 25, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 01, 2011	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 10, 2012	Radiation (03CH02-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May. 10, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 08, 2011	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 15, 2011	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Nov. 11, 2011	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 06, 2012	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2011	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.


Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Sep. 09, 2010*	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

5 TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei 221, Taiwan, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C TEL : 886-3-327-3456 FAX : 886-3-327-0973
LINKOU	ADD : No. 30-2, Dingfu Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C. TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei 114, Taiwan, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei 235, Taiwan, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-120405

財團法人全國認證基金會
Taiwan Accreditation Foundation


Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2010 to January 09, 2013
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory for Commodities Inspection
Accreditation Program for Telecommunication Equipment Testing Laboratory
Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date: April 05, 2012

P1, total 24 pages