



**FCC 47 CFR PART 15 SUBPART C AND ANSI C63.10:2009
TEST REPORT**

For

Wireless Router

Model : R-300NP

Data Applies To : WG-701 ; WG-606 ; AP-300NP

Issued for

Handlink Technologies Inc.

**4F,NO.3,PROSPERITY RD.1,SCIENCE-BASED INDUSTRIAL
PARK,HSINCHU 300,TAIWAN,R.O.C.**

Issued by

**Compliance Certification Services Inc.
Hsinchu Lab.**

**NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C**

TEL: +886-3-5921698

FAX: +886-3-5921108

<http://www.ccsrf.com>

E-Mail : service@ccsrf.com

Issued Date: August 21, 2014



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	08/21/2014	Initial Issue	All Page 117	Michelle Chiu



TABLE OF CONTENTS

TITLE	PAGE NO.
1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	7
4. TEST METHODOLOGY	9
5. FACILITIES AND ACCREDITATION	9
5.1 FACILITIES	9
5.2 ACCREDITATIONS.....	9
5.3 MEASUREMENT UNCERTAINTY	10
6. SETUP OF EQUIPMENT UNDER TEST	11
7. FCC PART 15.247 REQUIREMENTS	13
7.1 6dB BANDWIDTH	13
7.2 MAXIMUM PEAK OUTPUT POWER	27
7.3 AVERAGE POWER	30
7.4 POWER SPECTRAL DENSITY	33
7.5 CONDUCTED SPURIOUS EMISSION	48
7.6 RADIATED EMISSION.....	67
7.7 CONDUCTED EMISSION	103
APPENDIX I SETUP PHOTOS	110



1. TEST REPORT CERTIFICATION

Applicant : Handlink Technologies Inc.
Address : 4F,NO.3,PROSPERITY RD.1,SCIENCE-BASED
INDUSTRIAL PARK,HSINCHU 300,TAIWAN,R.O.C.
Equipment Under Test : Wireless Router
Model : R-300NP
Data Applies To : WG-701 ; WG-606 ; AP-300NP
Tested Date : July 25 ~ August 12, 2014

APPLICABLE STANDARD	
Standard	Test Result
FCC Part 15 Subpart C AND ANSI C63.10:2009	PASS

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Sb. Lu
Sr. Engineer

Reviewed by:

Gundam Lin
Sr. Engineer



2. EUT DESCRIPTION

Product Name	Wireless Router
Model Number	R-300NP
Identify Number	T140725S01
Received Date	July 25, 2014
Frequency Range	IEEE 802.11b/g, 802.11gn HT20 : 2412MHz ~ 2462MHz IEEE 802.11gn HT40 : 2422MHz ~ 2452MHz
Transmit Power	IEEE 802.11b : 17.45 dBm (0.0556 W) IEEE 802.11g : 25.67 dBm (0.3690 W) IEEE 802.11gn HT20 : 26.77 dBm (0.4753 W) IEEE 802.11gn HT40 : 25.39 dBm (0.3459 W)
Channel Spacing	IEEE 802.11b/g, 802.11gn HT20/HT40 : 5 MHz
Channel Number	IEEE 802.11b/g, 802.11gn HT20: 11 Channels IEEE 802.11gn HT40 : 7 Channels
Transmit Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11gn HT20 : 144.4, 130, 117, 115.6, 104, 86.7, 78, 72.2, 65, 58.5, 57.8, 52, 43.3, 39, 28.9, 26, 21.7, 19.5, 14.4, 13, 7.2, 6.5Mbps IEEE 802.11gn HT40 : 300, 270, 243, 240, 216, 180, 162, 150, 135, 121.5, 120, 108, 90, 81, 60, 54, 45, 40.5, 30, 27, 15, 13.5Mbps
Type of Modulation	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11gn HT20/40 : OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type	Dipole Antenna × 2, Antenna Gain : 5 dBi
Power Rating	12Vdc (For Power Adapter) 48Vdc (For PoE)
Test Voltage	120Vac, 60Hz
DC Power Cable Type	Non-shielded cable, 2 m (Non-detachable), with a ferrite core (For Power Adapter 1) Non-shielded cable, 1.5 m (Non-detachable) (For Power Adapter 2)
I/O Port	LAN Port × 4, WAN Port × 1, USB Port × 1, Power Port × 1

**Power Adapter :**

No.	Manufacturer	Model No.	Power Input	Power Output
1	PHIHONG	PSA18R-120P	100-240Vac, 0.5A, 50-60Hz, 406-60VA	12Vdc, 1.5A
2	UMEC	UP0121A-12PA	100-240Vac, 50/60Hz, 0.4A MAX	+12Vdc, 1A, 12W MAX

The difference of the series model:

Model Number	Trade Name	Product Type	DC Power adapter	Power by PoE	USB	WAN	LAN1~4
R-300NP	Handlink	Router	V	V	V	V	V
WG-701	Coolbee WiFi	Ultimate Hotspot	V	X	V	V	V
WG-606	Handlink	Wireless Subscriber Gateway	V	X	V	V	V
AP-300NP	Handlink	Access Point	X	V	X	V	V

Remark :

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. For more details, please refer to the User's manual of the EUT.
3. This submittal(s) (test report) is intended for FCC ID: TWS-WG-701 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
4. The model R-300NP was considered the main model for testing.




3. DESCRIPTION OF TEST MODES

The EUT is an 802.11n MIMO transceiver in Wireless Router form factor.

IEEE 802.11 b/g mode (1TX/1RX) : Chain 0 / Ant 1 can be use as transmitter.

IEEE 802.11gn HT20/HT40 (2TX/2RX) : Chain 0 / Ant 1 & Chain 1 / Ant 2 two transmitter.

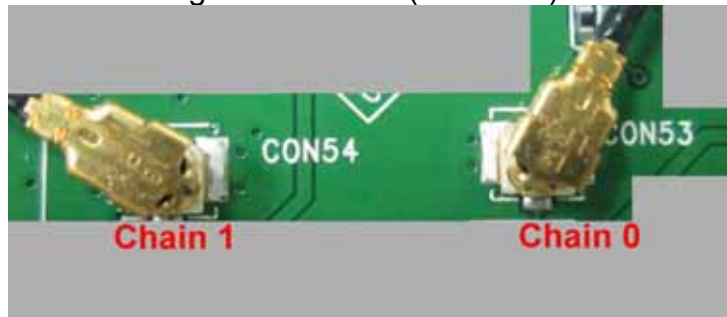

Conducted Emission / Radiated Emission Test (Below 1 GHz)

1. The following test modes were scanned during the preliminary test:

No.	Pre-Test Mode
1	Normal Operating / Power Adapter 1
2	Normal Operating / Power Adapter 2
3	Normal Operating / PoE

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

Final Test Mode		
Emission	Radiated Emission	Normal Operating / Power Adapter 1 Normal Operating / Power Adapter 2 Normal Operating / PoE
	Conducted Emission	Normal Operating / Power Adapter 1 Normal Operating / Power Adapter 2

Remark : Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

**Conducted / Radiated Emission Test (Above 1 GHz)****IEEE 802.11b, 802.11g, 802.11gn HT20 mode**

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode : 1Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11g mode : 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11gn HT20 mode : 13Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11gn HT40 mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11gn HT40 mode : 27Mbps data rate (worst case) were chosen for full testing.



4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2009 and FCC CFR 47, 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATION

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

The sites are constructed in conformance with the requirements of ANSI C63.10:2009 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4, CISPR 16-1-5.

5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Taiwan	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	INDUSTRY CANADA
Japan	VCCI
Taiwan	BSMI
USA	FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>



5.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 30 to 1000 MHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 1 to 18GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 18 to 26 GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 26 to 40 GHz	+/- 3.82
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 30 to 1000 MHz	+/- 3.97
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 1 to 18GHz	+/- 3.58
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 18 to 26 GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 26 to 40 GHz	+/- 3.81
Conducted Emission (Mains Terminals), 9kHz to 30MHz	+/- 2.48

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Consistent with industry standard (e.g. CISPR 22, clause 11, Measurement Uncertainty) determining compliance with the limits shall be based on the results of the compliance measurement. Consequently the measured emissions being less than the maximum allowed emission result in this being a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is based on conducted and radiated emissions being less than U_{CISPR} which is 3.6dB and 5.2dB respectively. CCS values (called U_{Lab} in CISPR 16-4-2) is less than U_{CISPR} as shown in the table above. Therefore, MU need not be considered for compliance.



6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.
1	Notebook PC	TOSHIBA	M840	9C104267C
2	Notebook PC	HP	ProBook 4421s	CNF03242PJ
3	Notebook PC	HP	ProBook 4421s	CNF03242PM
4	USB2.0 Flash Disk	Kingston	DTSE9H/8GB	---
5	PoE	ZyXEL	PoE-12	S11J16002987
6	Switch Hub	ASUS	GX1008B	90-Q872AN1N0NAMA0-88QS A1003522

No.	Signal Cable Description
1	Non-shielded RJ-45 cable, 10m × 2
2	Non-shielded RJ-45 cable, 3m × 3

SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

EUT OPERATING CONDITION

1. EUT & peripherals setup diagram is shown in appendix setup photos.
2. Power on all equipments.
3. Control computer LAN cable.
4. Execution wapmpt files within a folder wapmpt.20130722.
5. Control computer cable WAN.
6. Run MT7620 V1.0.6.0 AP Test.5.
7. TX Mode: Select => Manual TX / RX
 - ⇒ **Tx Data Rate:** 1Mbps Bandwidth 20 (IEEE 802.11b mode)
6Mbps Bandwidth 20 (IEEE 802.11g mode)
13Mbps Bandwidth 20 (IEEE 802.11gn HT20 mode)
27Mbps Bandwidth 40 (IEEE 802.11gn HT40 mode)
 - ⇒ **Power control**
IEEE 802.11b Channel Low (2412MHz) Power set 0A
IEEE 802.11b Channel Mid (2437MHz) Power set 9
IEEE 802.11b Channel High (2462MHz) Power set 0A
IEEE 802.11g Channel Low (2412MHz) Power set 0E
IEEE 802.11g Channel Mid (2437MHz) Power set 16



IEEE 802.11g Channel High (2462MHz) Power set 13
IEEE 802.11gn HT20 Channel Low (2412MHz)Power set 0C/0C
IEEE 802.11gn HT20 Channel Mid (2437MHz) Power set 11/11
IEEE 802.11gn HT20 Channel High(2462MHz)Power set 0D/0D
IEEE 802.11gn HT40 Channel Low (2422MHz) Power set 05/05
IEEE 802.11gn HT40 Channel Mid (2437MHz) Power set 0E/0E
IEEE 802.11gn HT40 Channel High (2452MHz)Power set 0A/0A

8. All of the functions are under run.

9. Start test.

Normal Mode :

1. EUT & peripherals setup diagram is shown in appendix setup photos.
2. EUT WAN IP 10.59.1.10 LAN IP 10.59.1.1.
3. EUT WAN port RJ-45 port link to Notebook PC 1 setup IP 10.59.1.12.
4. EUT LAN 1 port link to Notebook PC 2, setup DHCP.
5. EUT WiFi link to Notebook PC 3 DHCP ping Notebook PC 2.
6. EUT LAN 2 ~ 4 port link to load.
7. All of the functions are under run.
8. Start test.



7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMITS

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

1. The transmitter output was connected to a spectrum analyzer.
2. Set RBW = 100 kHz.
3. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**TEST RESULTS****IEEE 802.11b Mode**

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
		Chain 0		
Low	2412	10.055	500	PASS
Middle	2437	10.056	500	PASS
High	2462	10.065	500	PASS

IEEE 802.11g Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
		Chain 0		
Low	2412	16.560	500	PASS
Middle	2437	16.545	500	PASS
High	2462	16.585	500	PASS

IEEE 802.11gn HT20 Mode (Two TX)


Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain 1		
Low	2412	17.655	17.660	500	PASS
Middle	2437	17.630	17.690	500	PASS
High	2462	17.650	17.660	500	PASS


IEEE 802.11gn HT40 Mode (Two TX)


Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain 1		
Low	2422	36.530	36.440	500	PASS
Middle	2437	36.480	35.445	500	PASS
High	2452	36.490	36.530	500	PASS





6dB BANDWIDTH

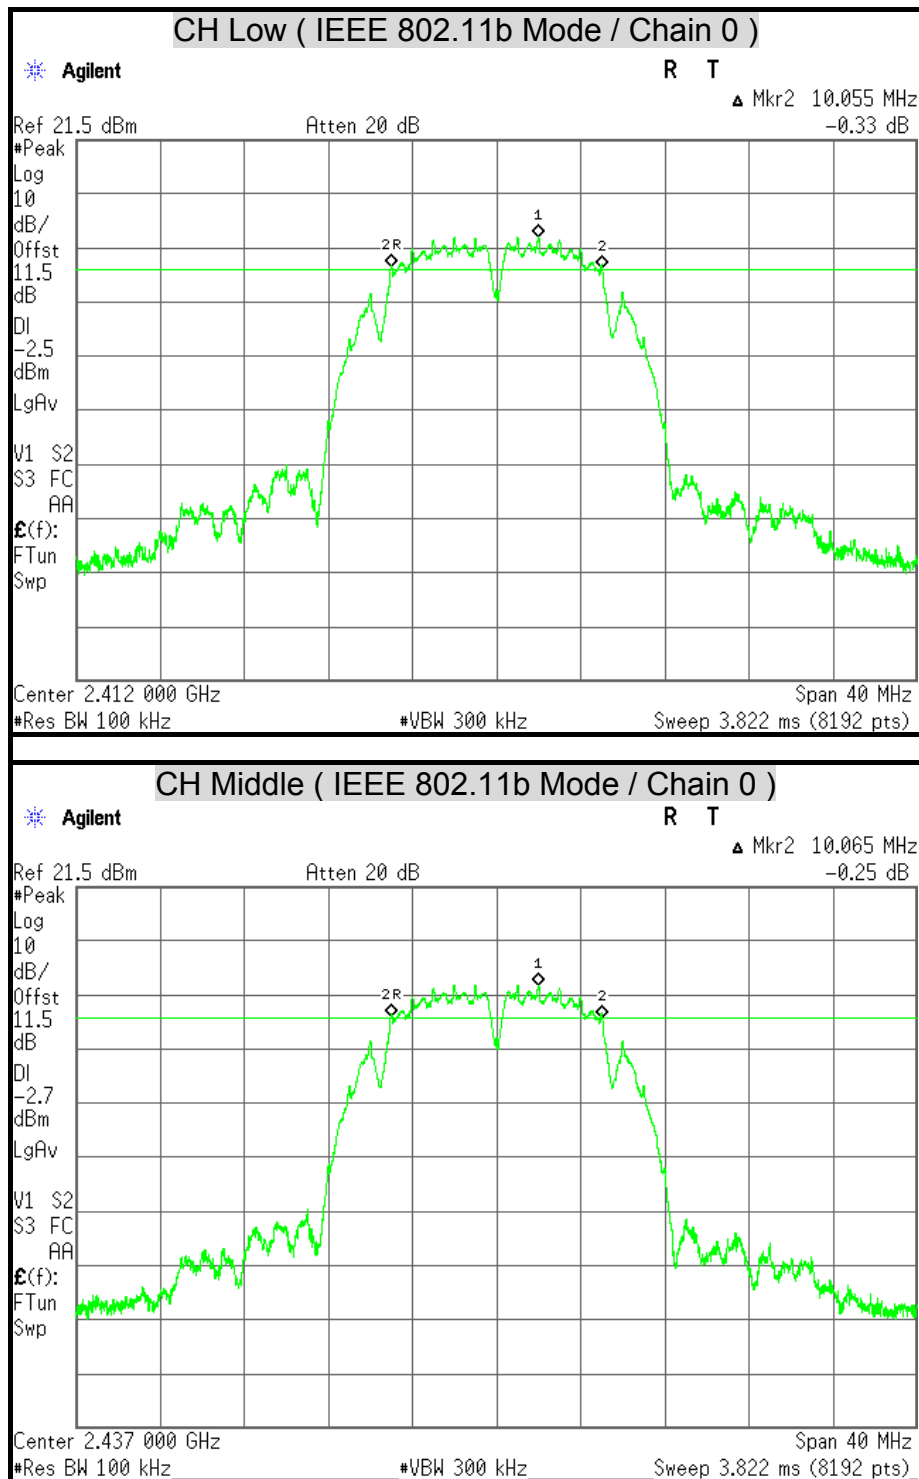


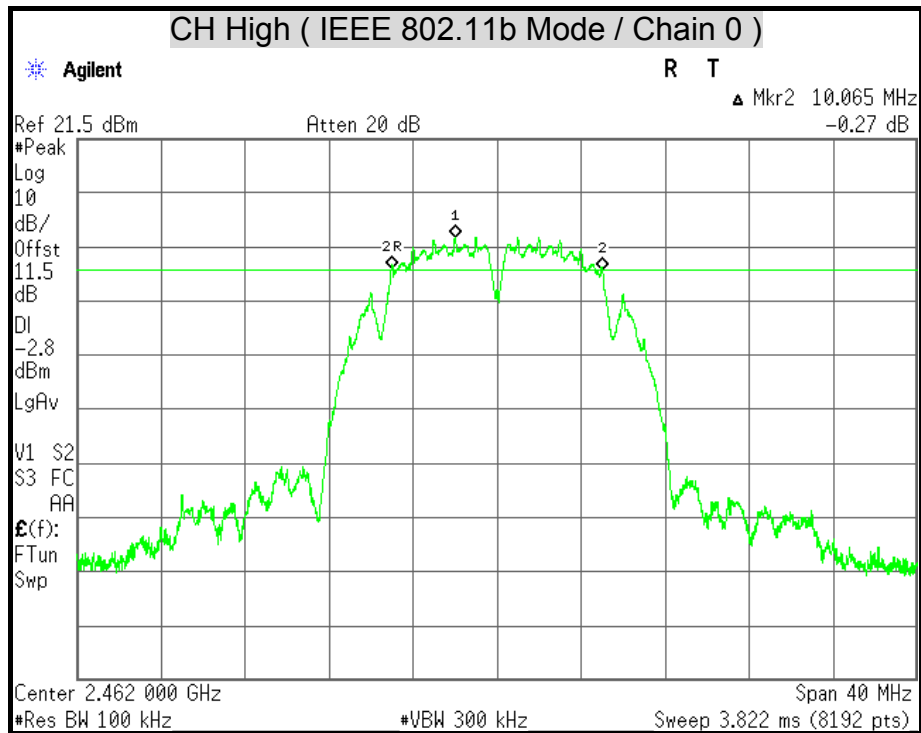


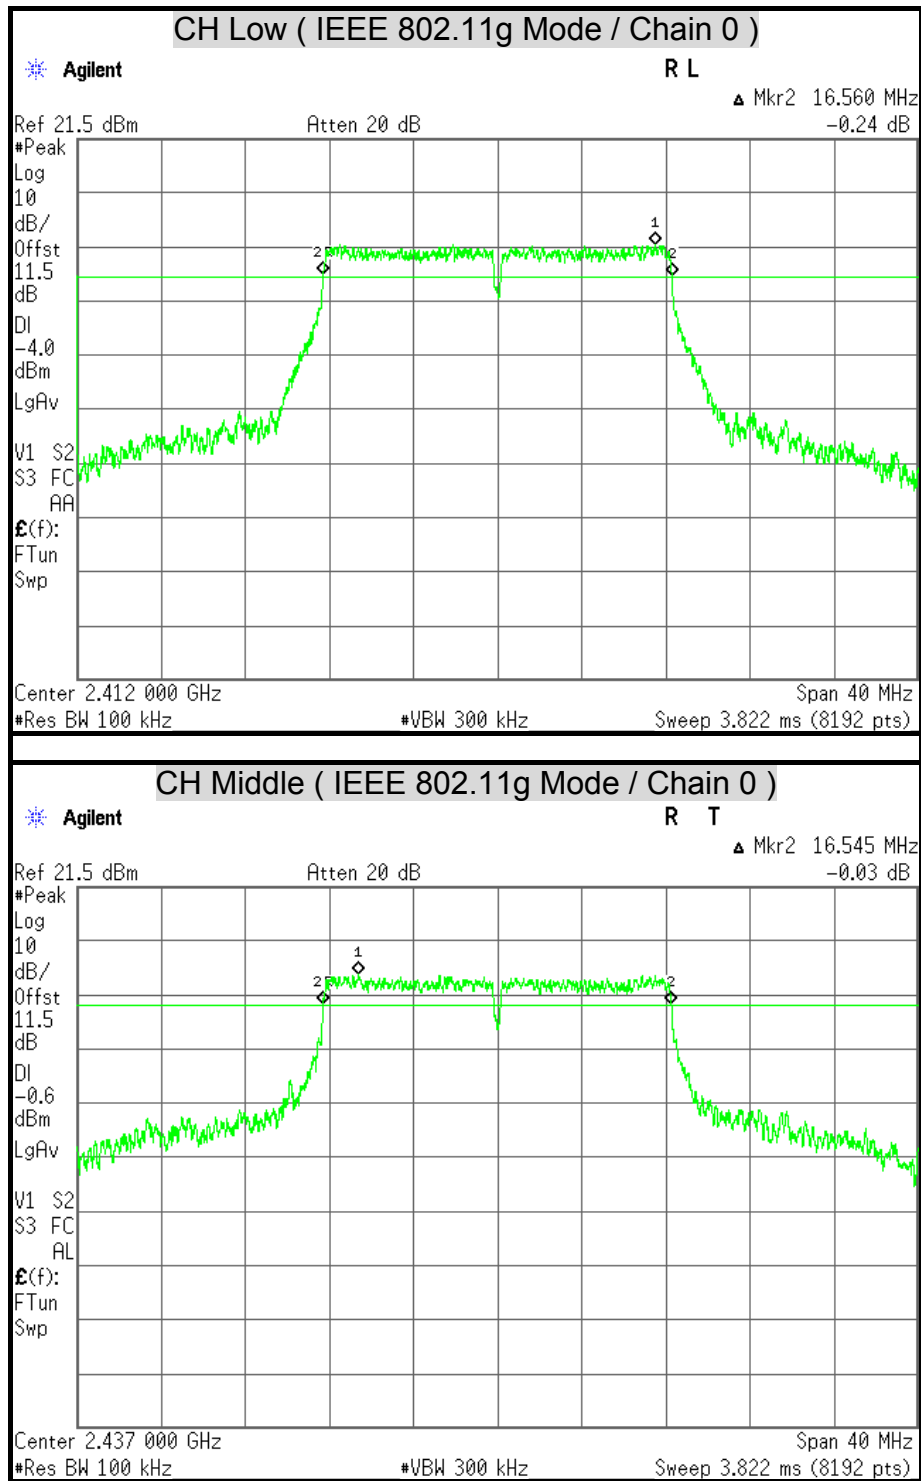


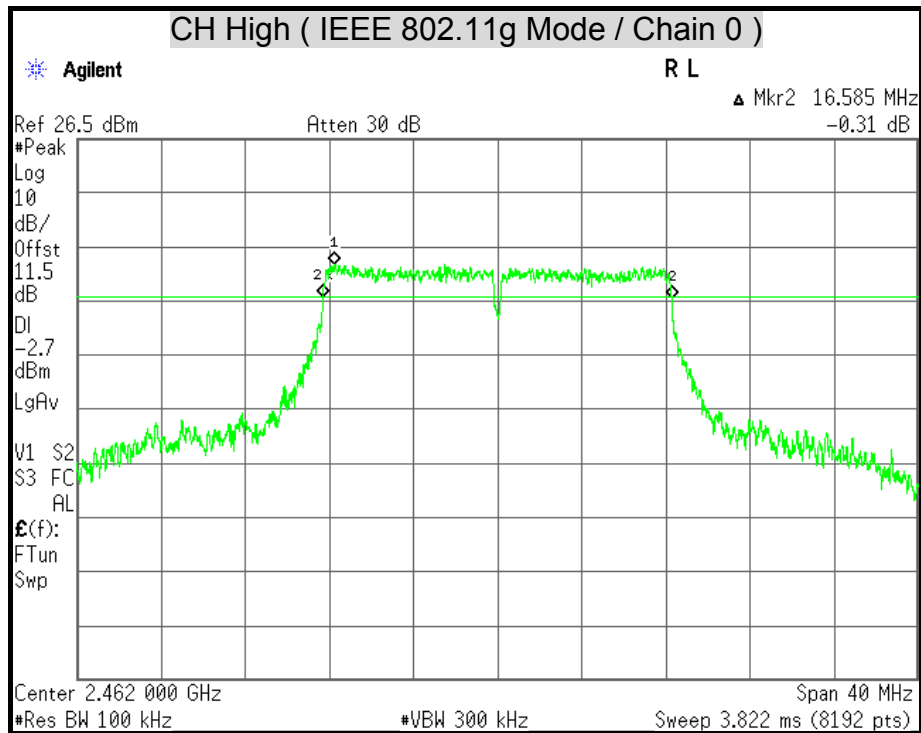


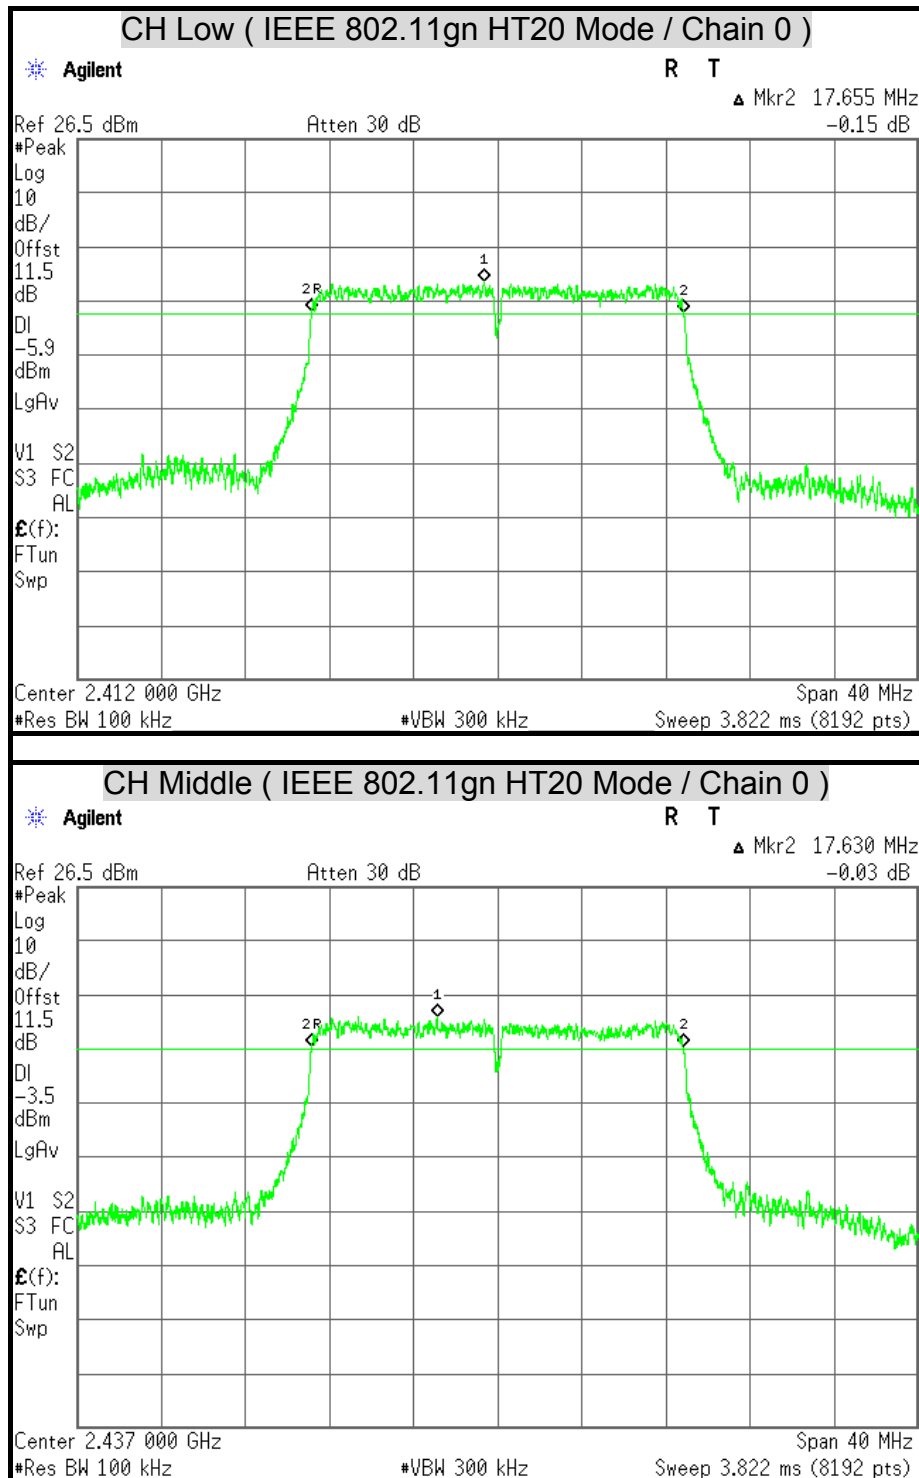


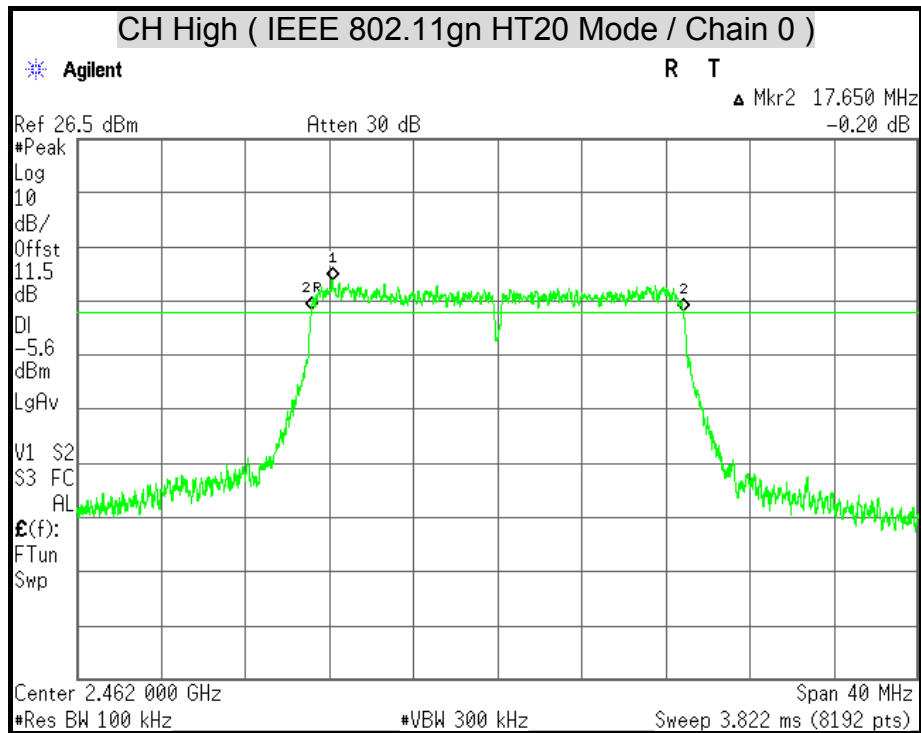


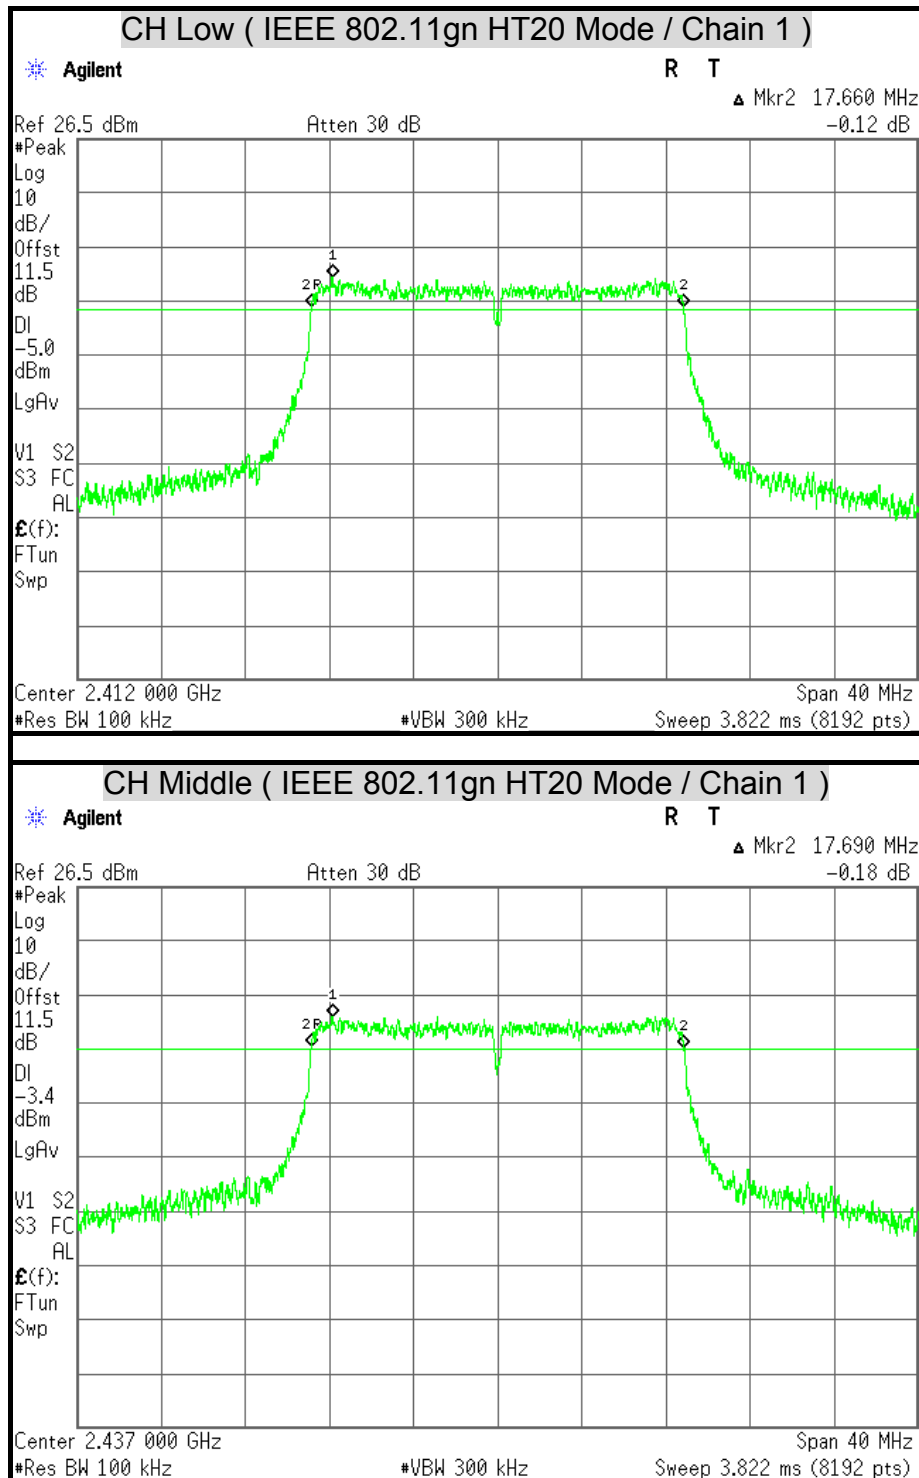


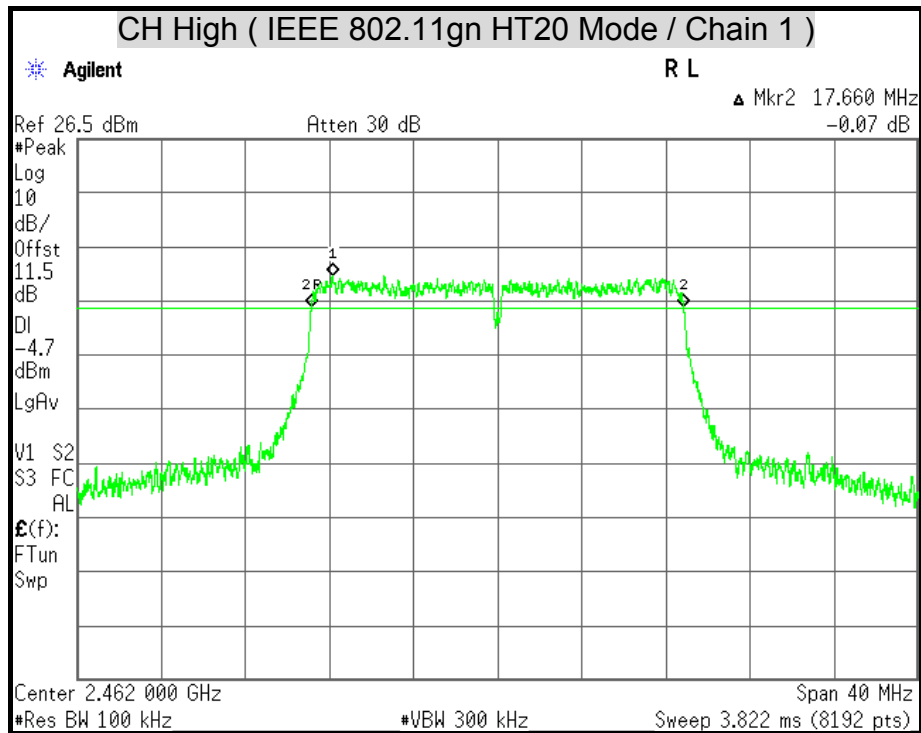

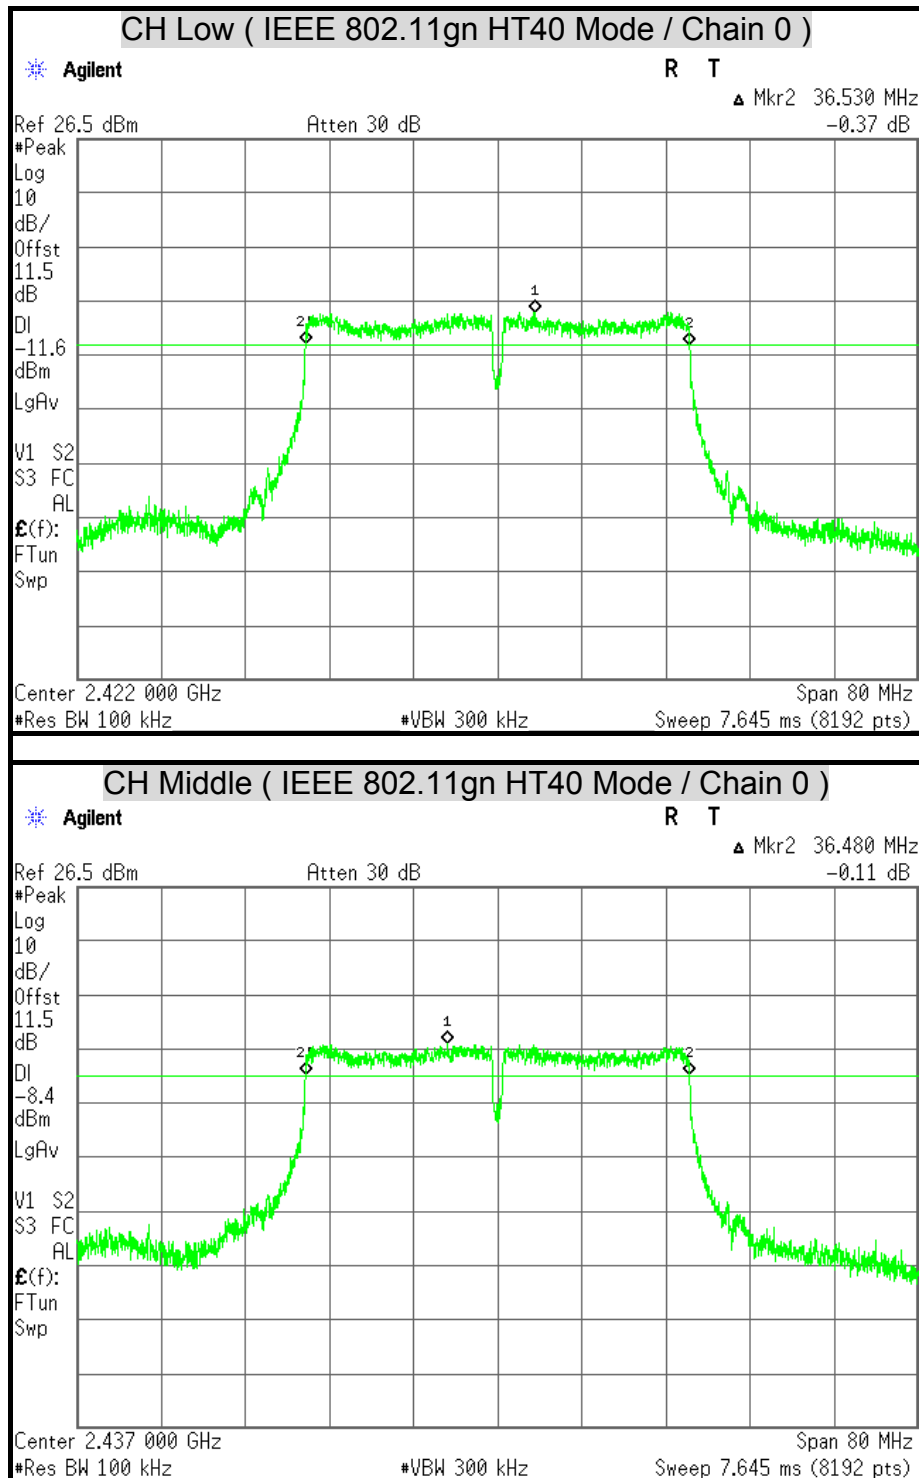

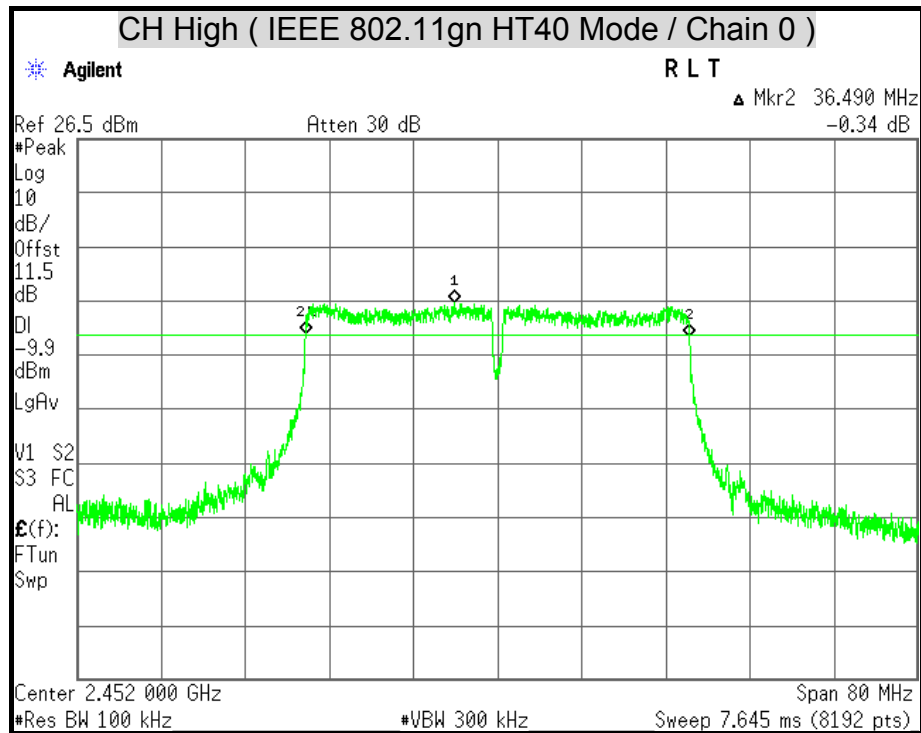

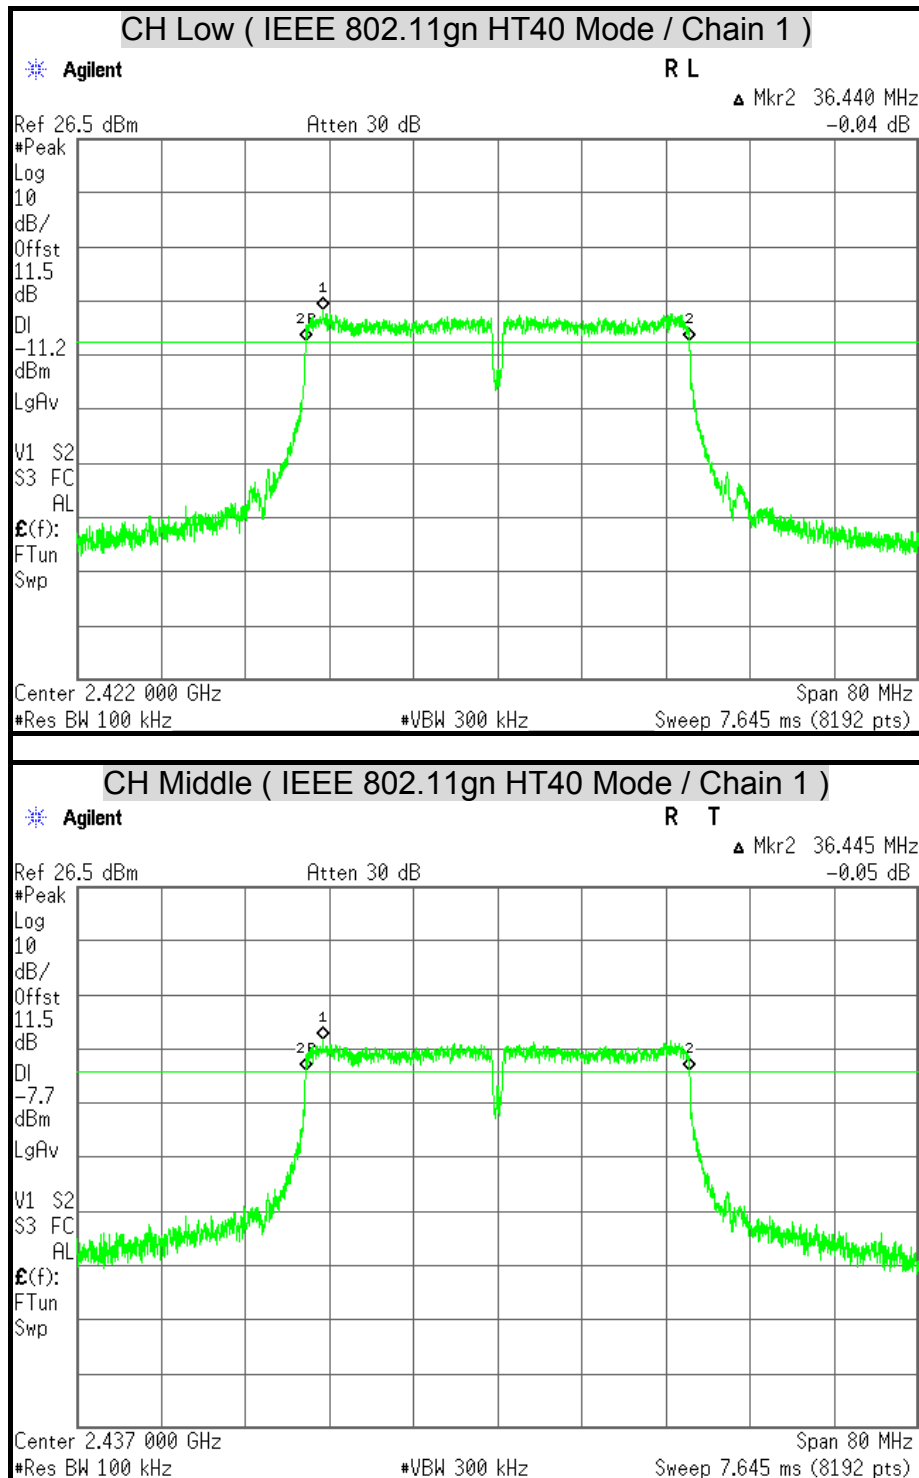

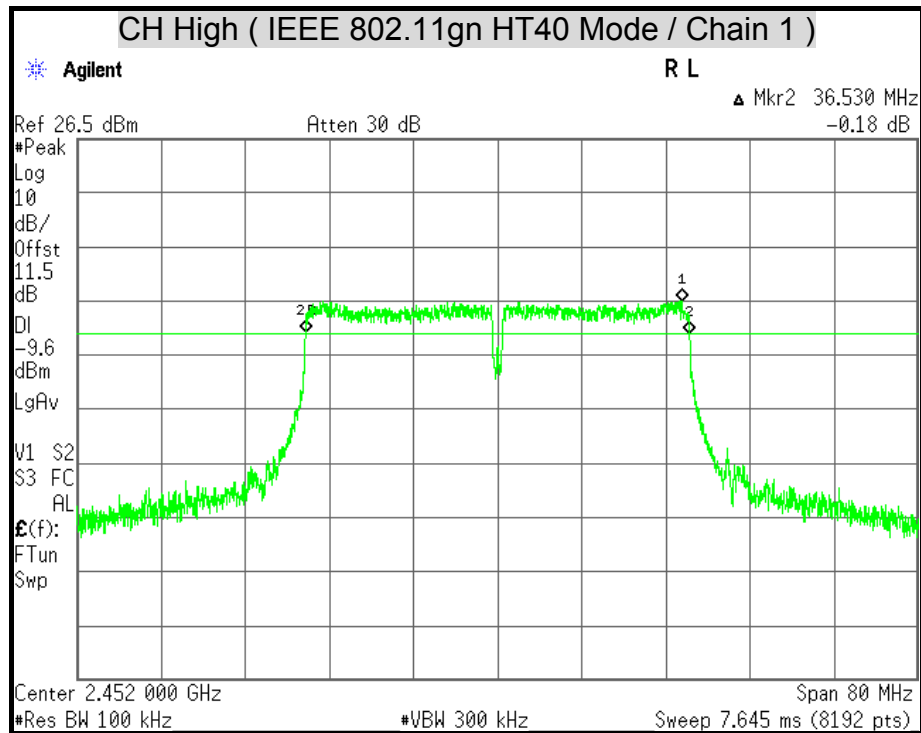



7.2 MAXIMUM PEAK OUTPUT POWER

LIMITS

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§ KDB 662911 : For power measurements on IEEE 802.11 devices

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2495A	1149001	12/06/2014
Power Sensor	Anritsu	MA2411B	1126148	12/06/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to the power meter. The power meter is set to the peak power detection.

**TEST RESULTS****IEEE 802.11b Mode**

Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Pass / Fail
		Chain 0				
		(dBm)	(W)	(dBm)	(W)	
Low	2412	17.45	0.0556	30	1	PASS
Middle	2437	17.16	0.0520	30	1	PASS
High	2462	17.17	0.0521	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

IEEE 802.11g Mode

Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Pass / Fail
		Chain 0				
		(dBm)	(W)	(dBm)	(W)	
Low	2412	24.12	0.2582	30	1	PASS
Middle	2437	25.67	0.3690	30	1	PASS
High	2462	24.66	0.2924	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

**IEEE 802.11gn HT20 Mode (Two TX)**

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total		Peak Power Limit		Pass / Fail
		Chain 0	Chain 1	(dBm)	(W)	(dBm)	(W)	
Low	2412	22.40	22.58	25.50	0.3548	30	1	PASS
Middle	2437	23.61	23.91	26.77	0.4753	30	1	PASS
High	2462	21.60	22.76	25.23	0.3334	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 13Mbps.
2. The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.
3. Array gain = 0 dB for $N_{ANT} \leq 4$, power limit do not reduce.
4. Total peak power = Chain 0 + Chain 1.

IEEE 802.11gn HT40 Mode (Two TX)

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total		Peak Power Limit		Pass / Fail
		Chain 0	Chain 1	(dBm)	(W)	(dBm)	(W)	
Low	2422	19.08	19.02	22.06	0.1607	30	1	PASS
Middle	2437	22.28	22.48	25.39	0.3459	30	1	PASS
High	2452	21.03	21.45	24.26	0.2667	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 27Mbps.
2. The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.
3. Array gain = 0 dB for $N_{ANT} \leq 4$, power limit do not reduce.
4. Total peak power = Chain 0 + Chain 1.



7.3 AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	ANRITSU	ML2495A	1149001	12/06/2014
Power Sensor	ANRITSU	MA2411B	1126148	12/06/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to the power meter. The power meter is set to the average power detection.

**TEST RESULTS****IEEE 802.11b Mode**

Channel	Channel Frequency (MHz)	Average Power (dBm)
		Chain 0
Low	2412	14.01
Middle	2437	13.75
High	2462	13.72

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

IEEE 802.11g Mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
		Chain 0
Low	2412	16.02
Middle	2437	19.46
High	2462	17.50

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

**IEEE 802.11gn HT20 Mode**

Channel	Channel Frequency (MHz)	Average Power (dBm)	
		Chain 0	Chain 1
Low	2412	14.42	14.72
Middle	2437	16.28	16.84
High	2462	13.87	15.17

Remark:

1. At final test to get the worst-case emission at 13Mbps.
2. The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.
3. Total average power = Chain 0 + Chain 1.

IEEE 802.11gn HT40 Mode

Channel	Channel Frequency (MHz)	Average Power (dBm)	
		Chain 0	Chain 1
Low	2422	11.16	11.26
Middle	2437	14.52	15.01
High	2452	13.23	13.76

Remark:

1. At final test to get the worst-case emission at 27Mbps.
2. The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.
3. Total average power = Chain 0 + Chain 1.



7.4 POWER SPECTRAL DENSITY

LIMITS

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set analyzer center frequency to DTS channel center frequency.
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
5. Set the VBW $\geq 3 \times \text{RBW}$.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level within the RBW.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

**TEST RESULTS****IEEE 802.11b Mode**

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Minimum Limit (dBm)	Pass / Fail
		Chain 0		
Low	2412	-15.18	8	PASS
Middle	2437	-15.31	8	PASS
High	2462	-15.38	8	PASS

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g Mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Minimum Limit (dBm)	Pass / Fail
		Chain 0		
Low	2412	-12.22	8	PASS
Middle	2437	-8.91	8	PASS
High	2462	-11.02	8	PASS

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11gn HT20 Mode (Two TX)**

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)		PSD Total (dBm)	Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2412	-13.86	-12.52	-10.13	5.99	PASS
Middle	2437	-11.25	-10.77	-7.99	5.99	PASS
High	2462	-13.75	-12.15	-9.87	5.99	PASS

Remark:

1. At final test to get the worst-case emission at 13Mbps.
2. The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. The Directional gain = $G_{ANT} + \text{Array Gain} = 8.01\text{dBi}$ which is more than 6dBi, the limit should be 5.99dBm.
4. Total power spectral density = Chain 0 + Chain 1.

IEEE 802.11gn HT40 Mode (Two TX)


Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)		PSD Total (dBm)	Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2422	-17.51	-18.22	-14.84	5.99	PASS
Middle	2437	-14.90	-15.50	-12.18	5.99	PASS
High	2452	-15.65	-15.49	-12.56	5.99	PASS


Remark:


1. At final test to get the worst-case emission at 27Mbps.
2. The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. The Directional gain = $G_{ANT} + \text{Array Gain} = 8.01\text{dBi}$ which is more than 6dBi, the limit should be 5.99dBm.
4. Total power spectral density = Chain 0 + Chain 1.





POWER SPECTRAL DENSITY

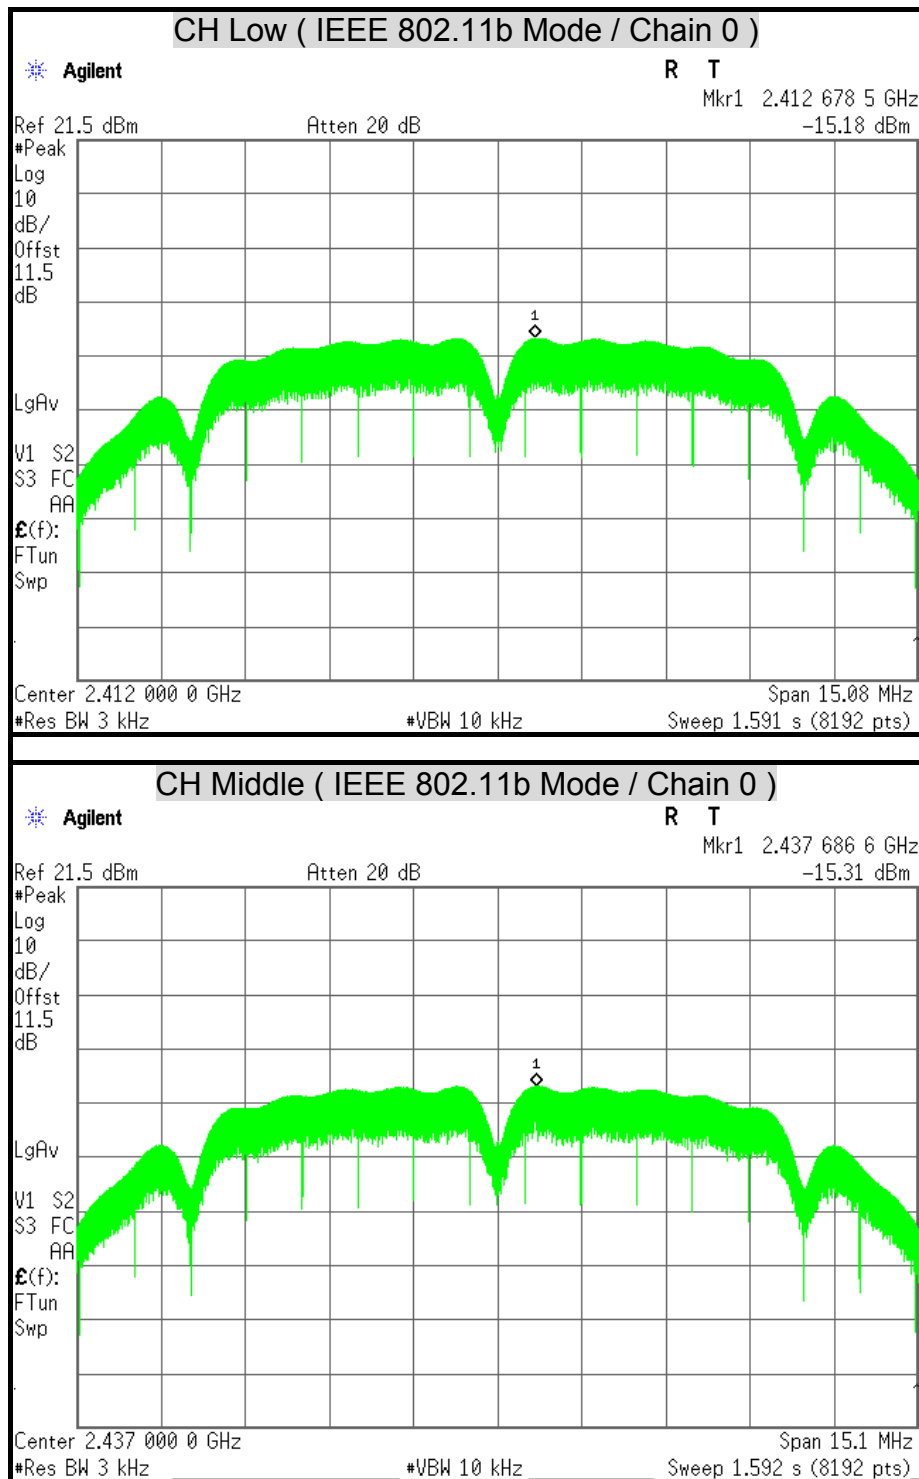


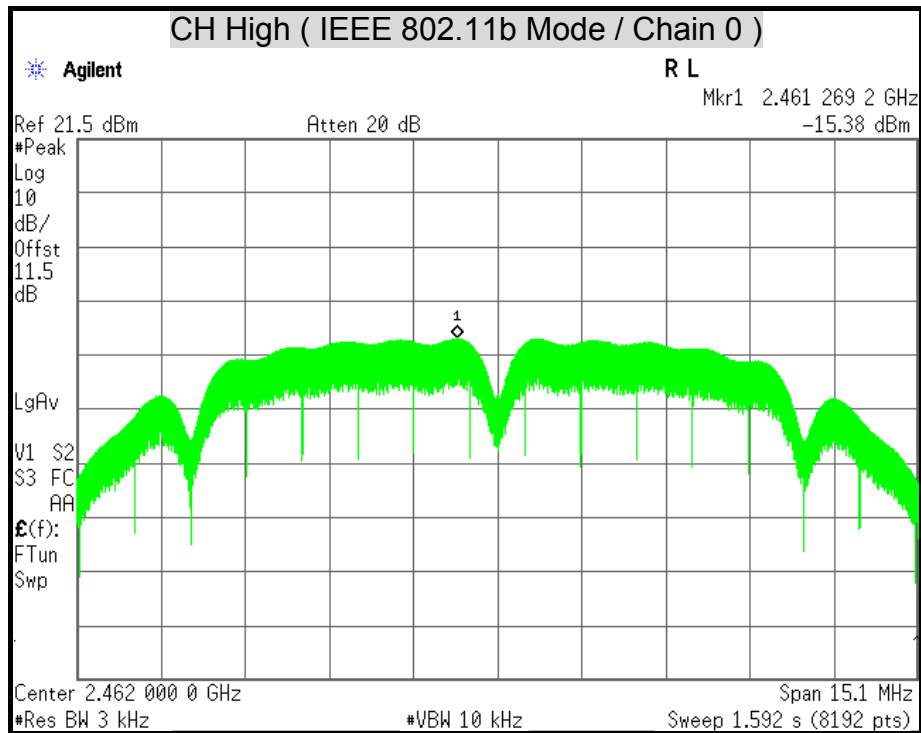


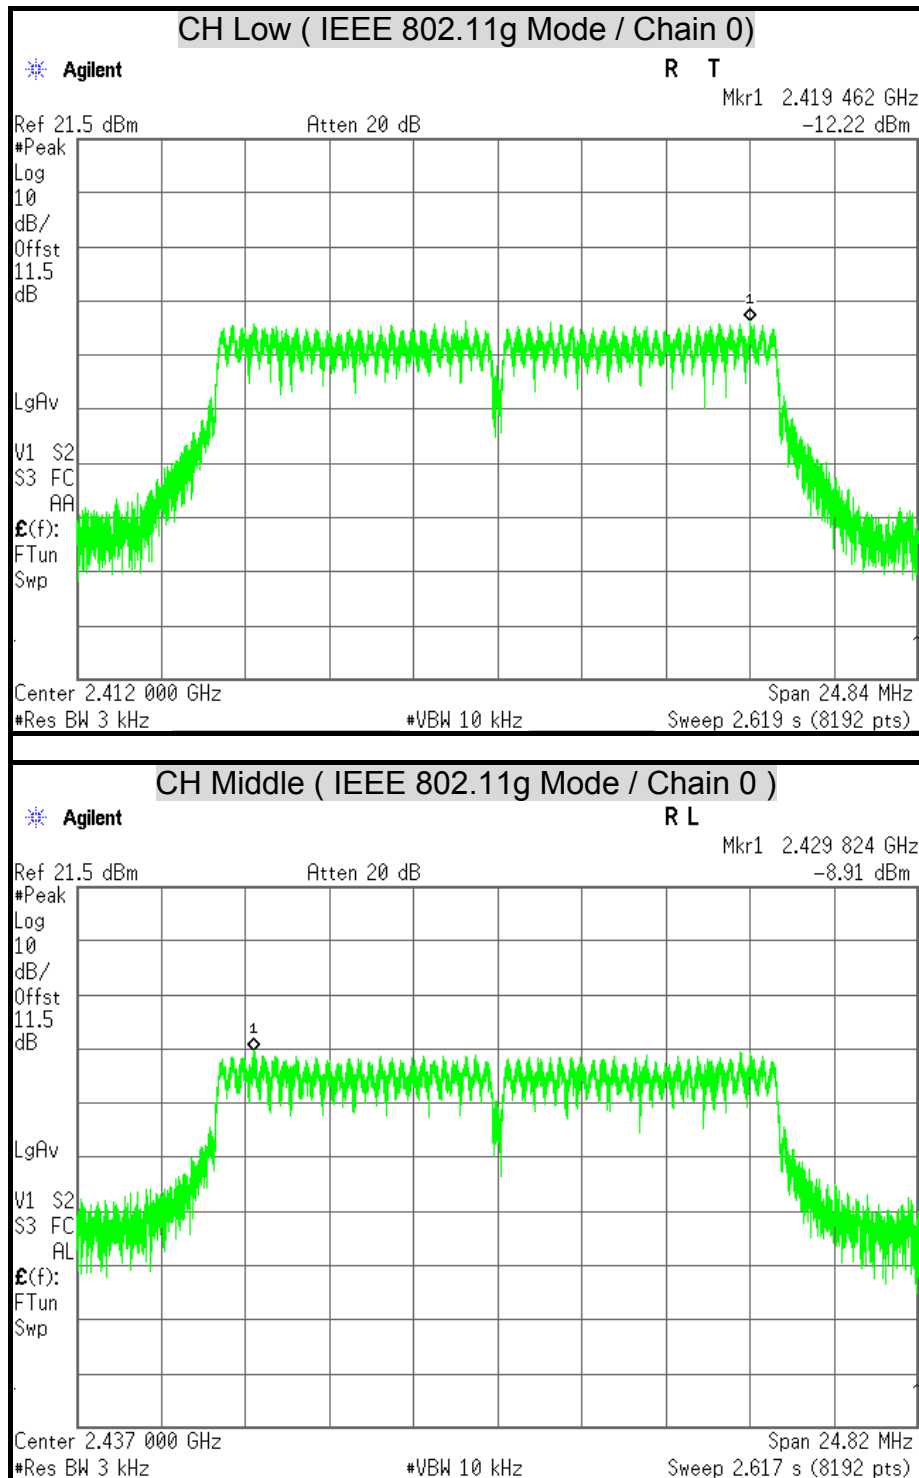


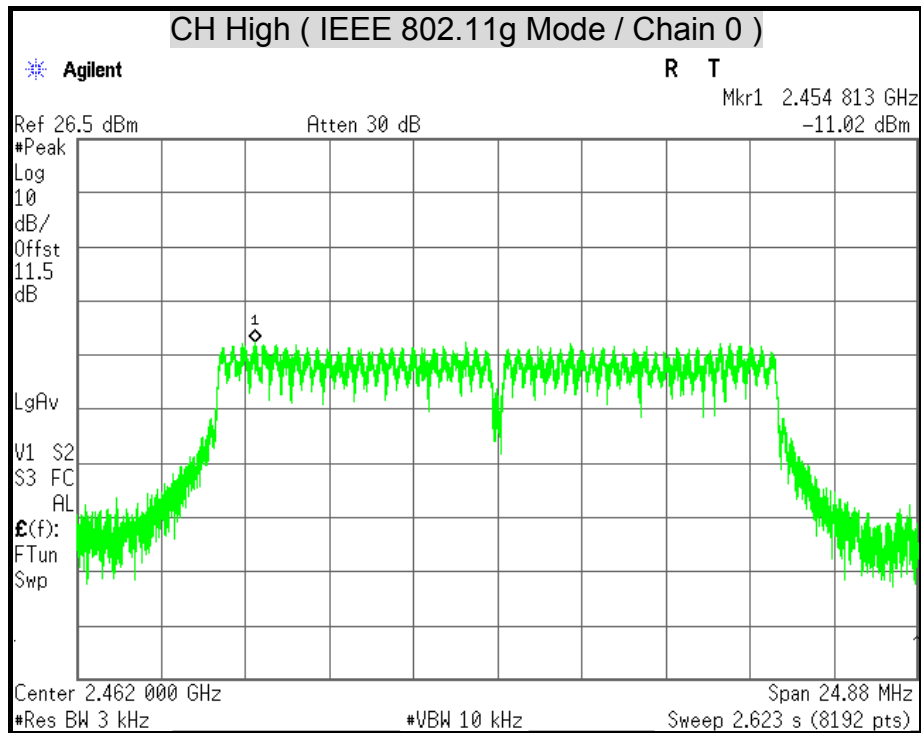


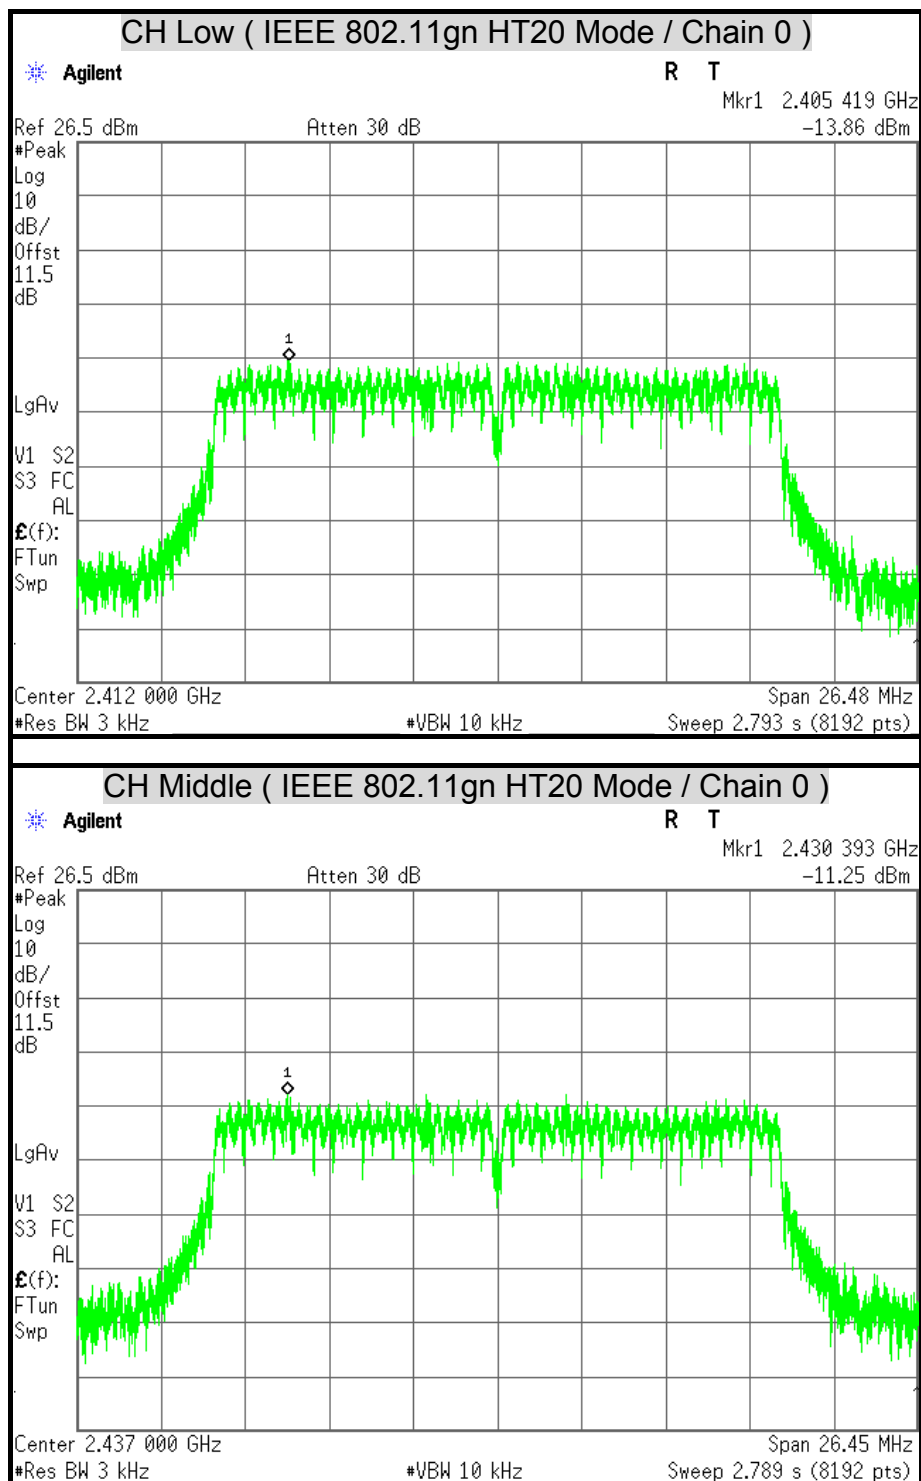


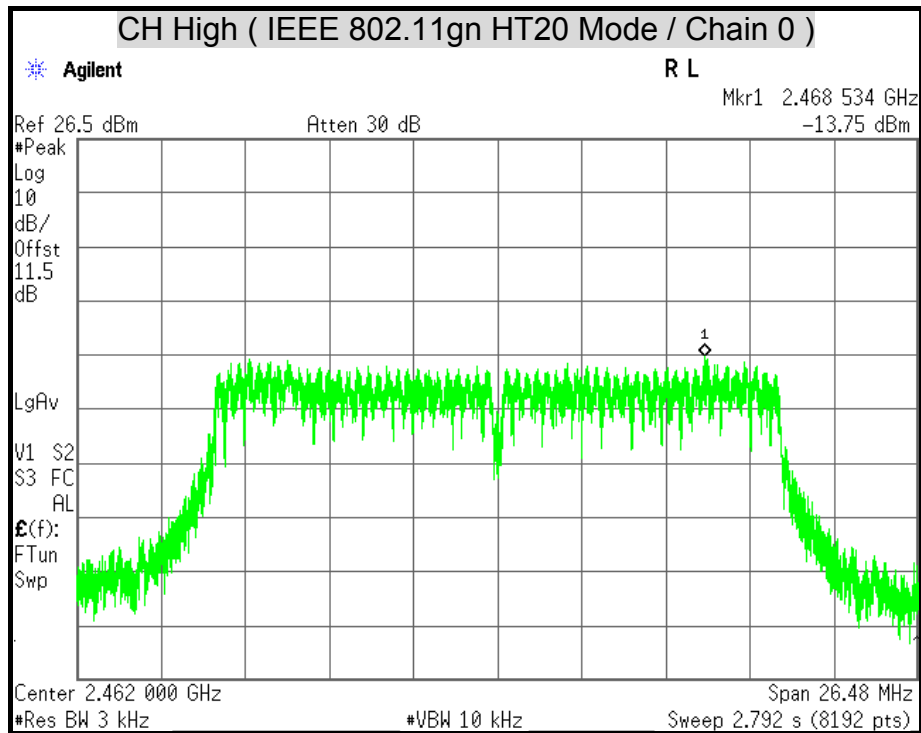


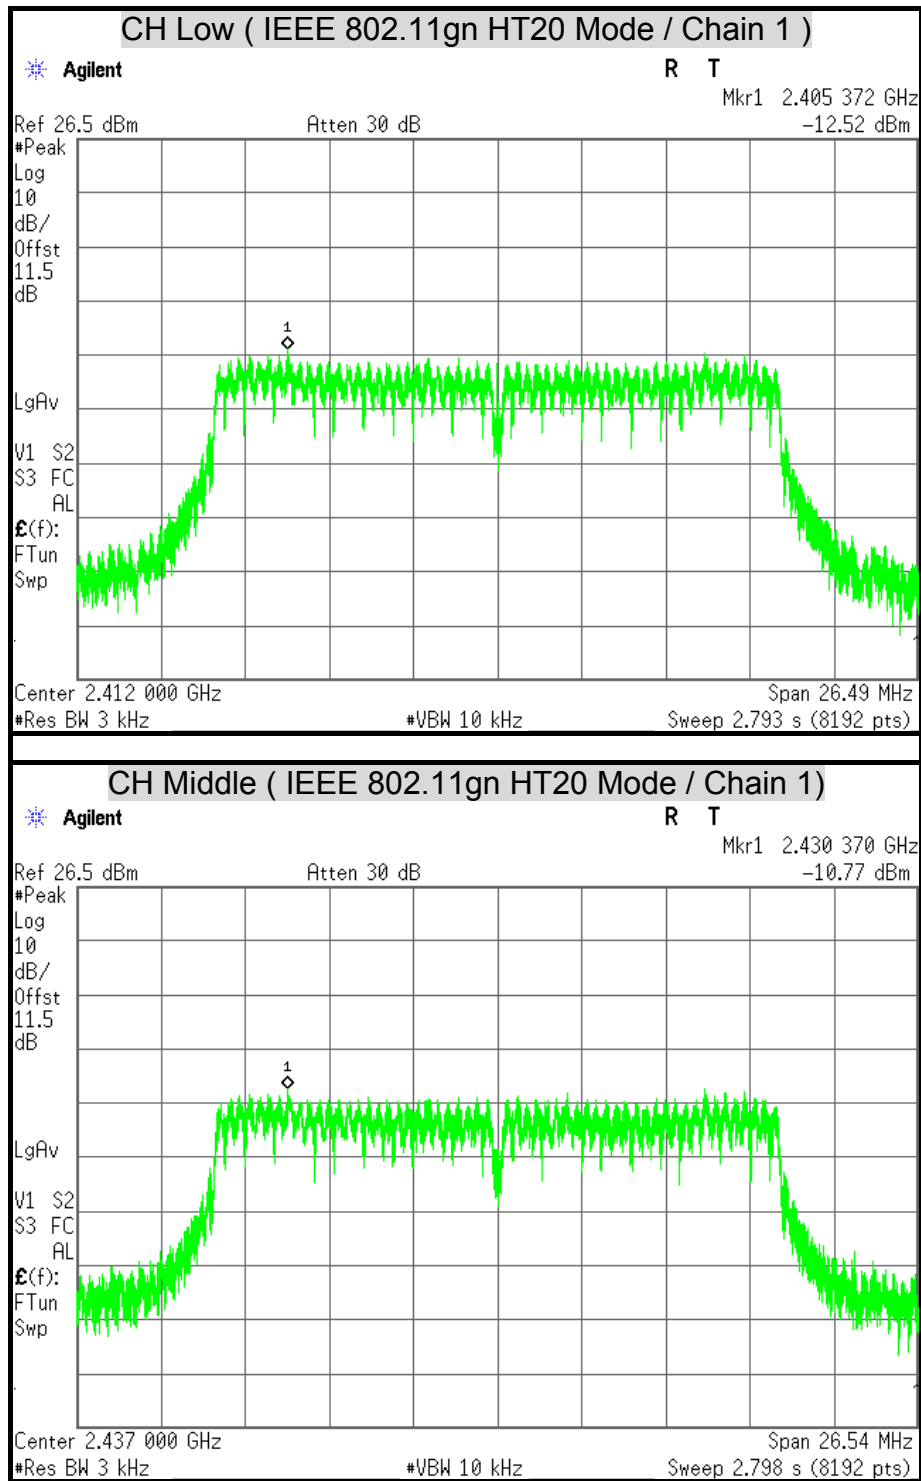


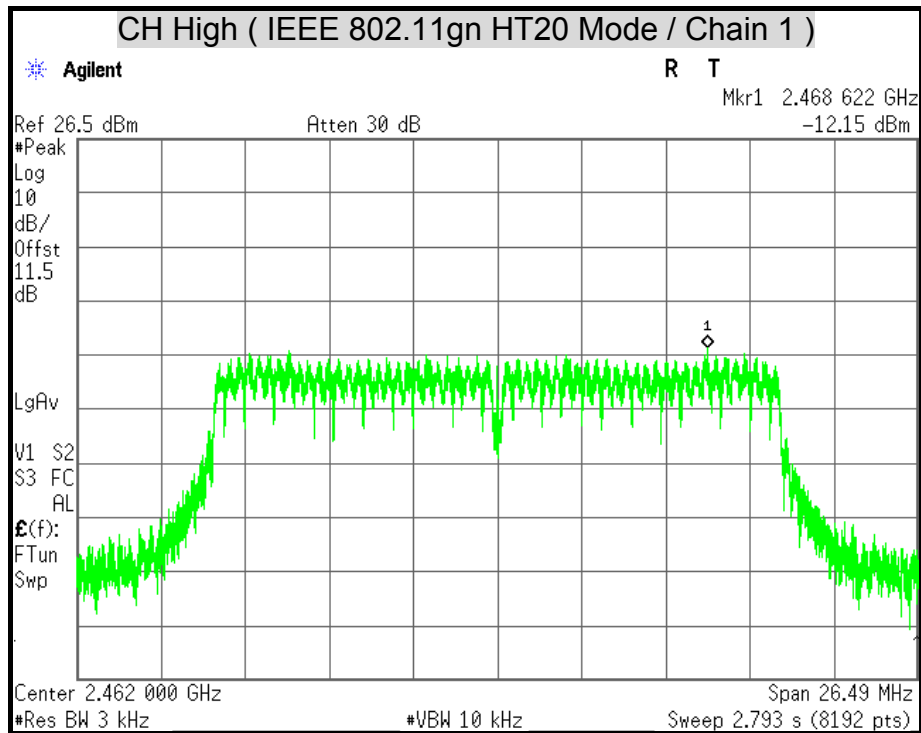

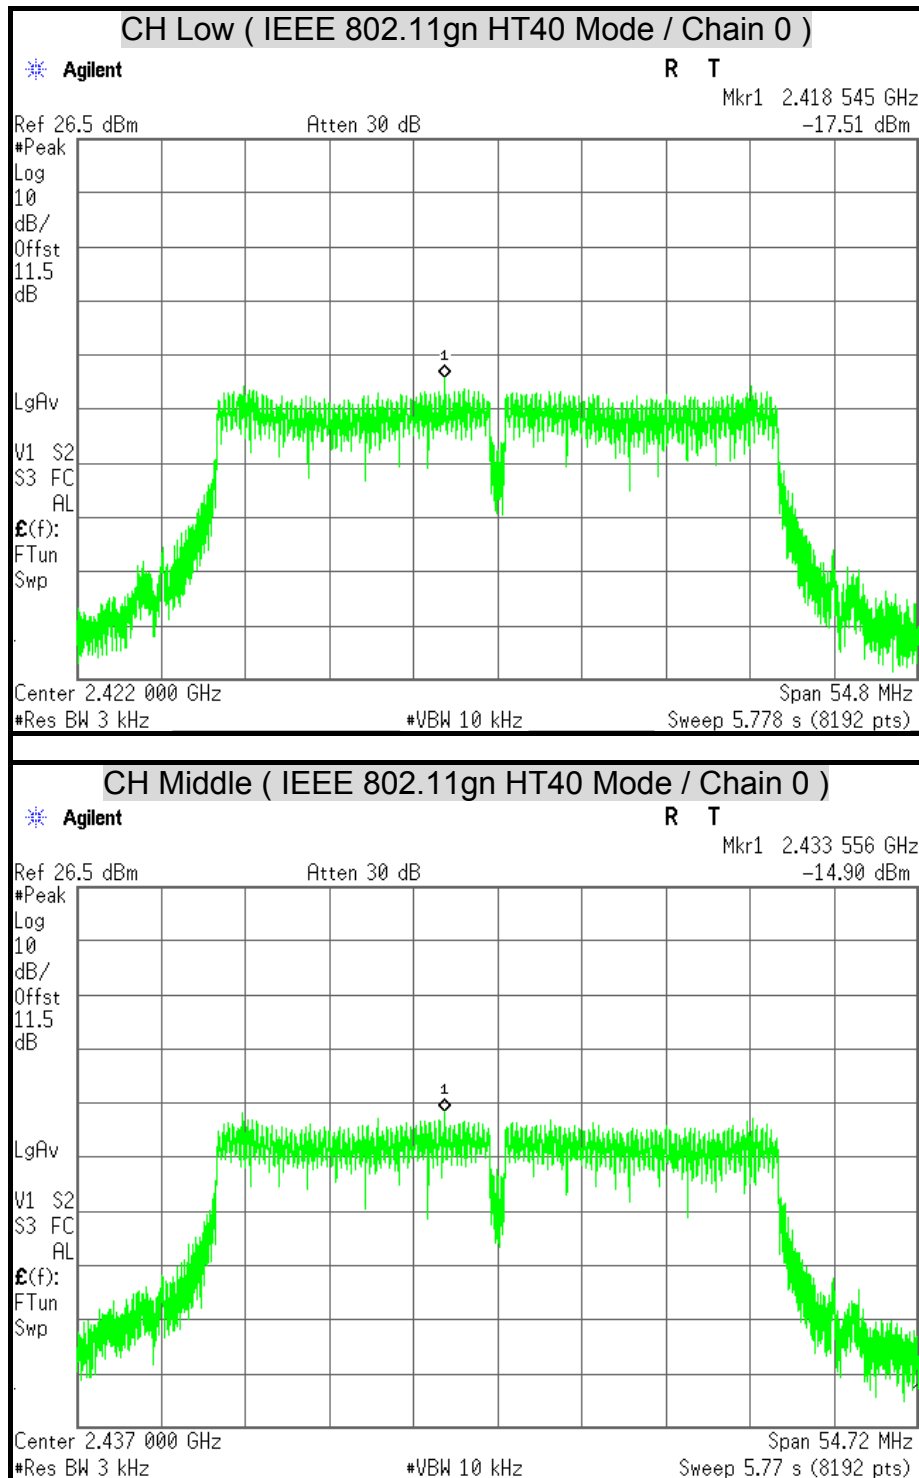

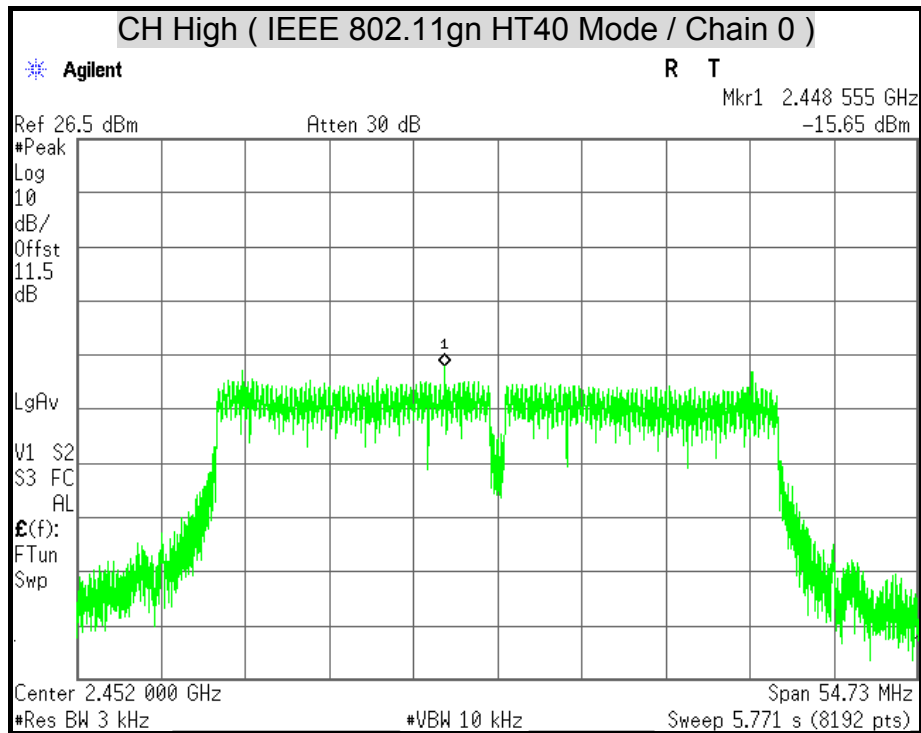

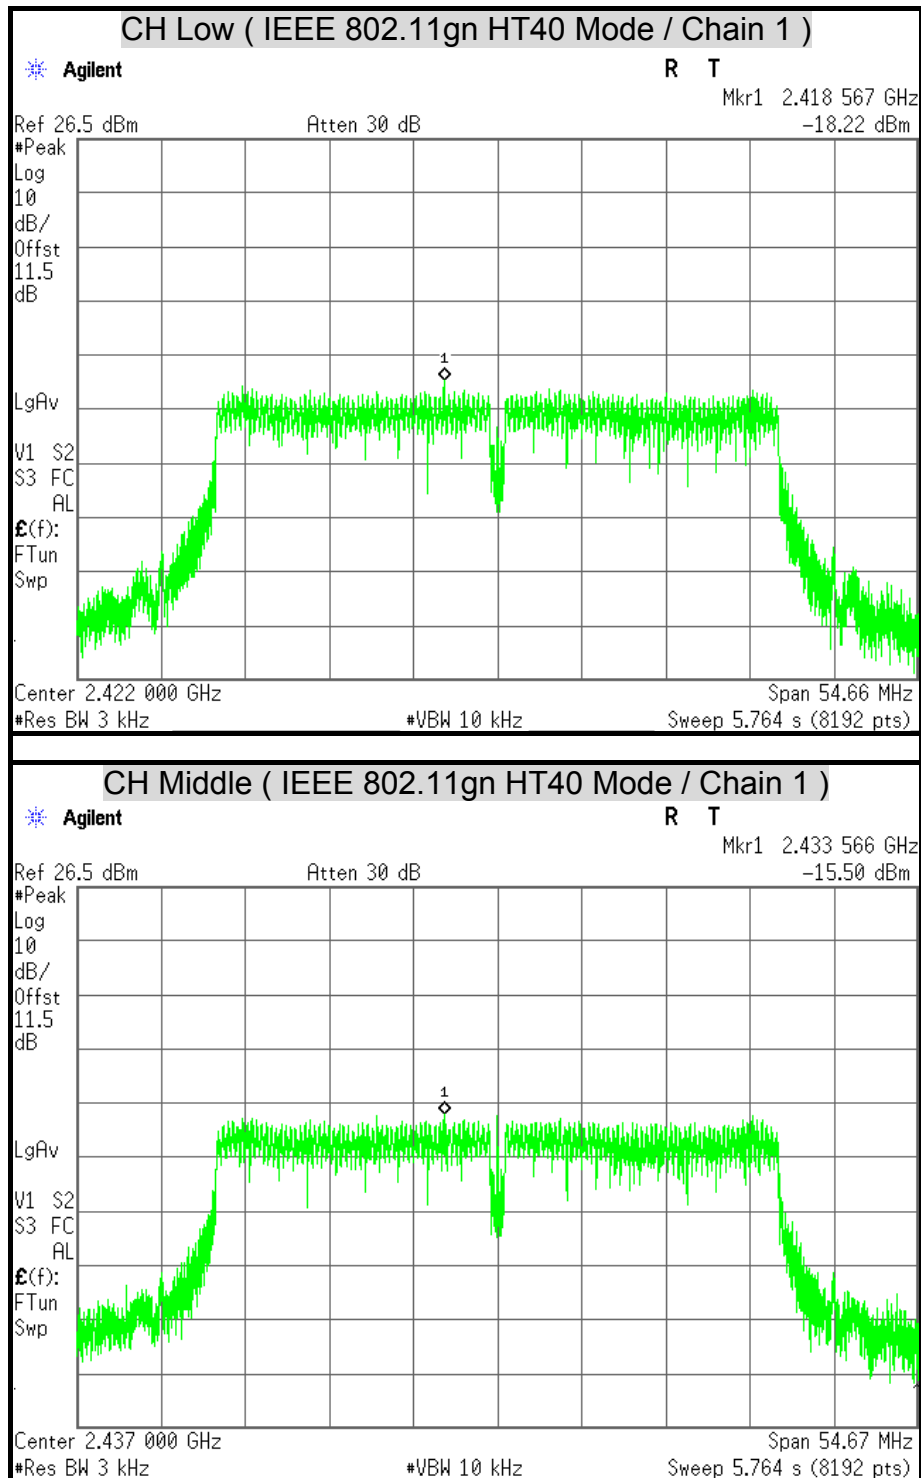

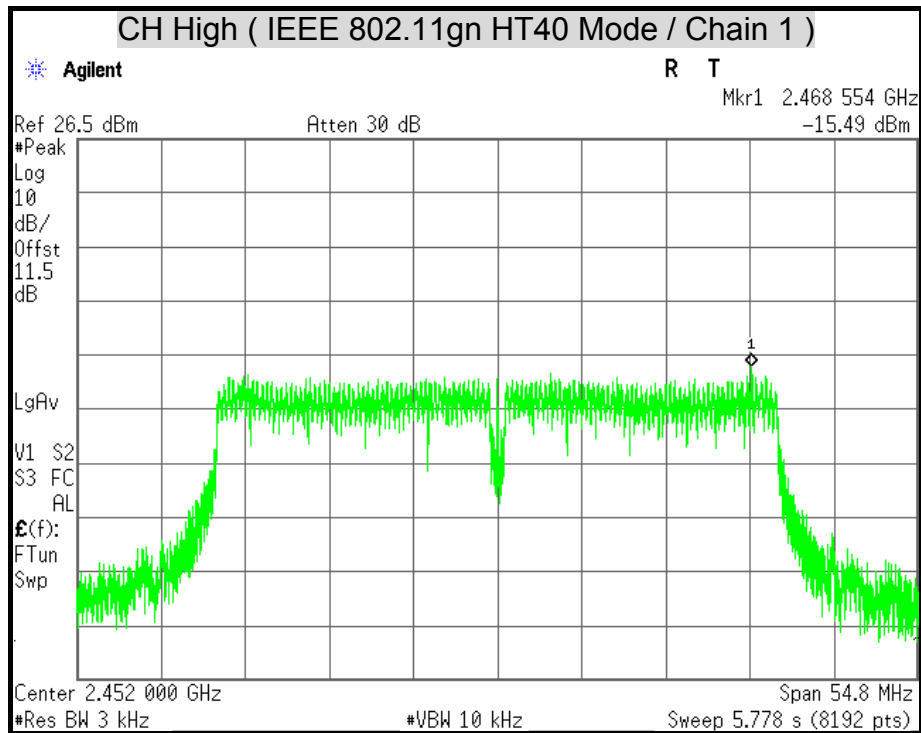



7.5 CONDUCTED SPURIOUS EMISSION

LIMITS

§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.





TEST RESULTS


OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

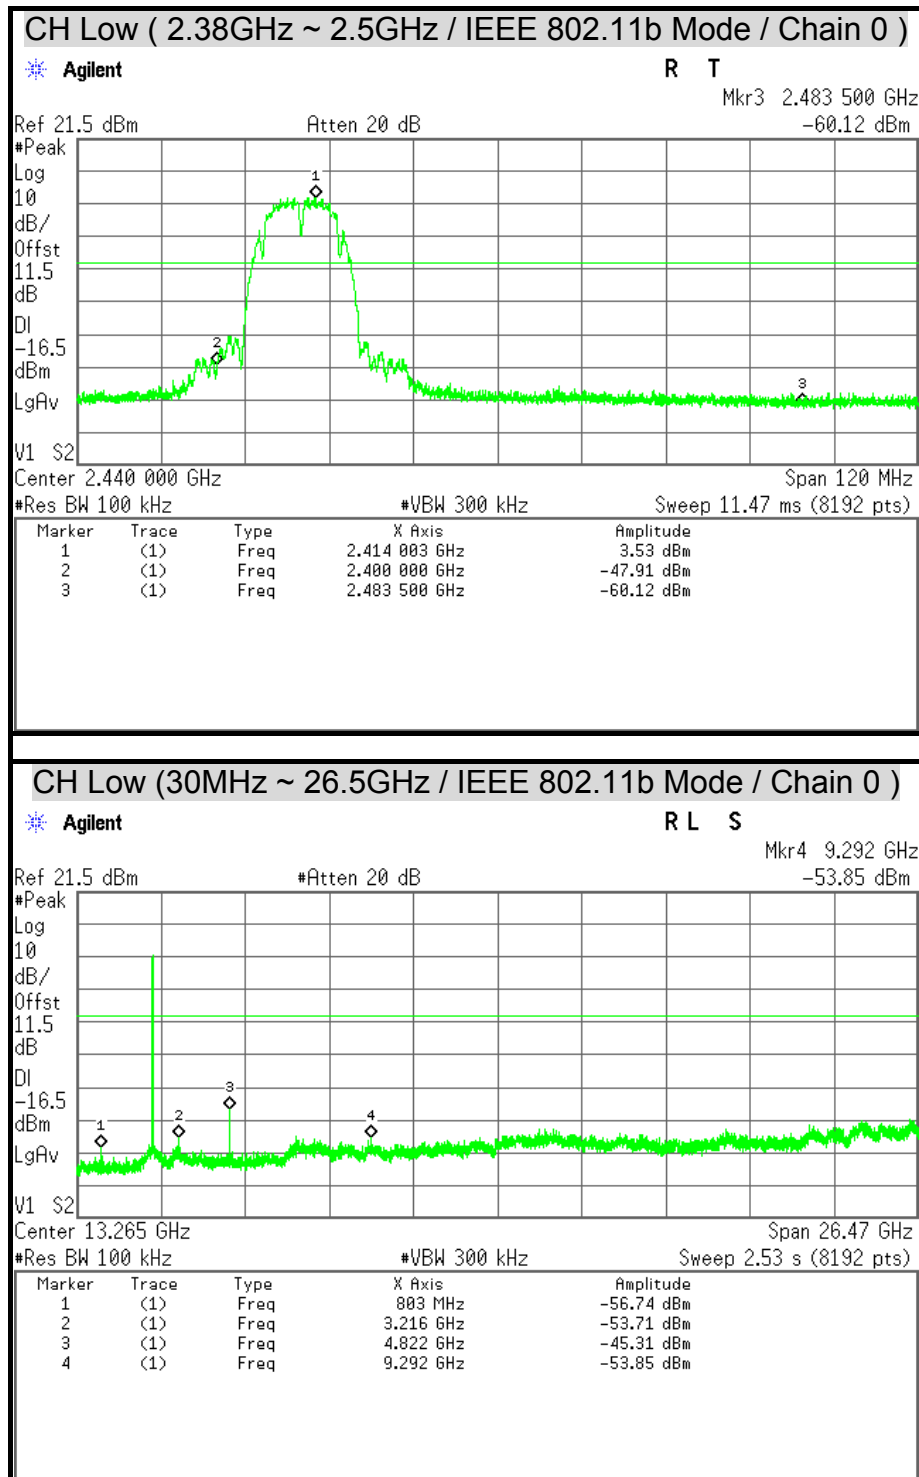



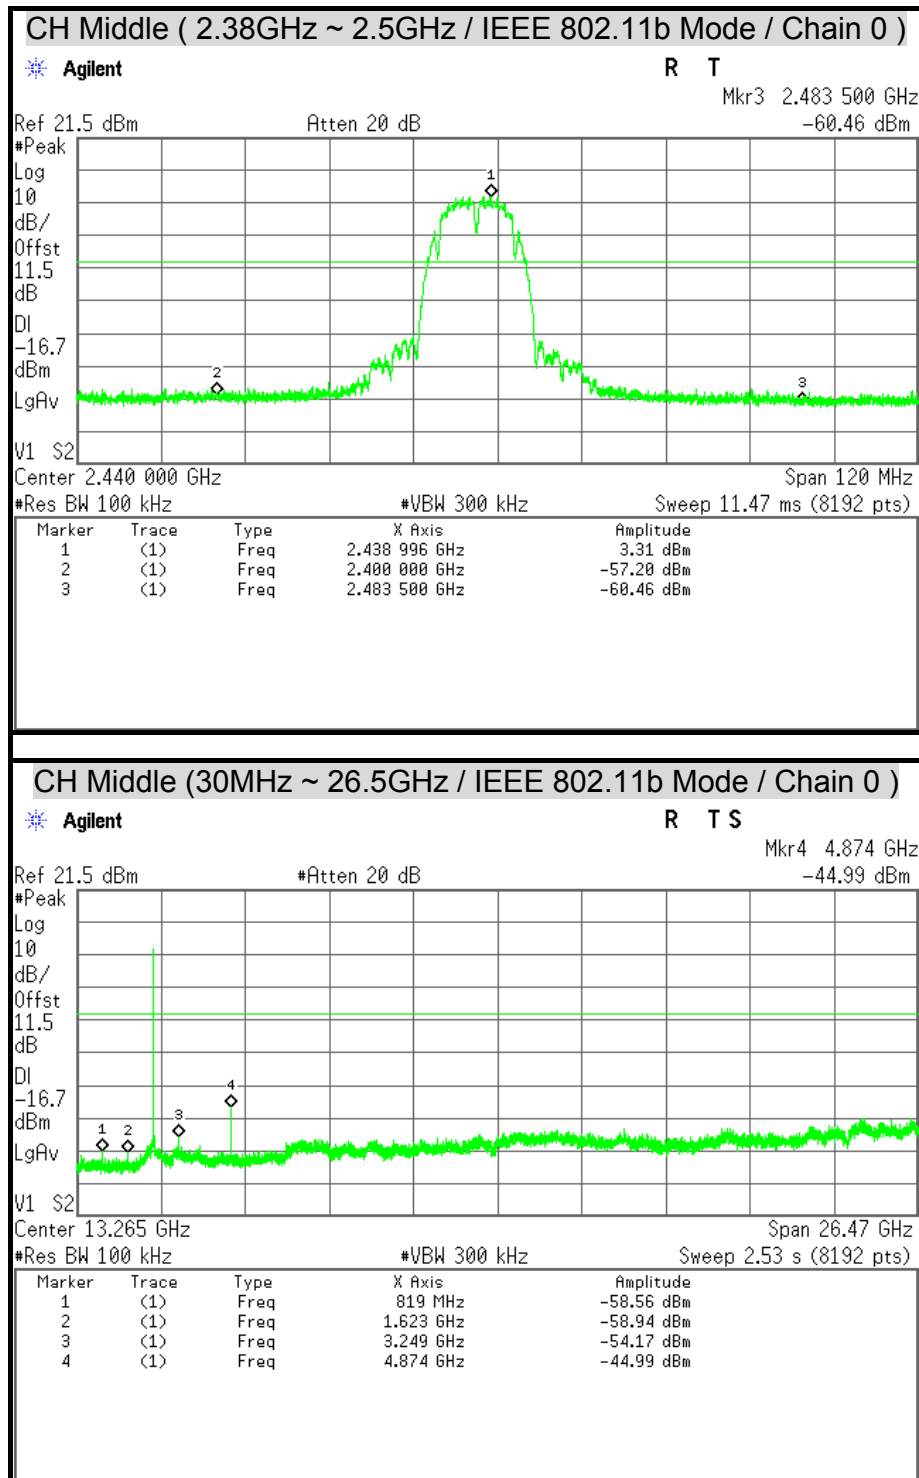


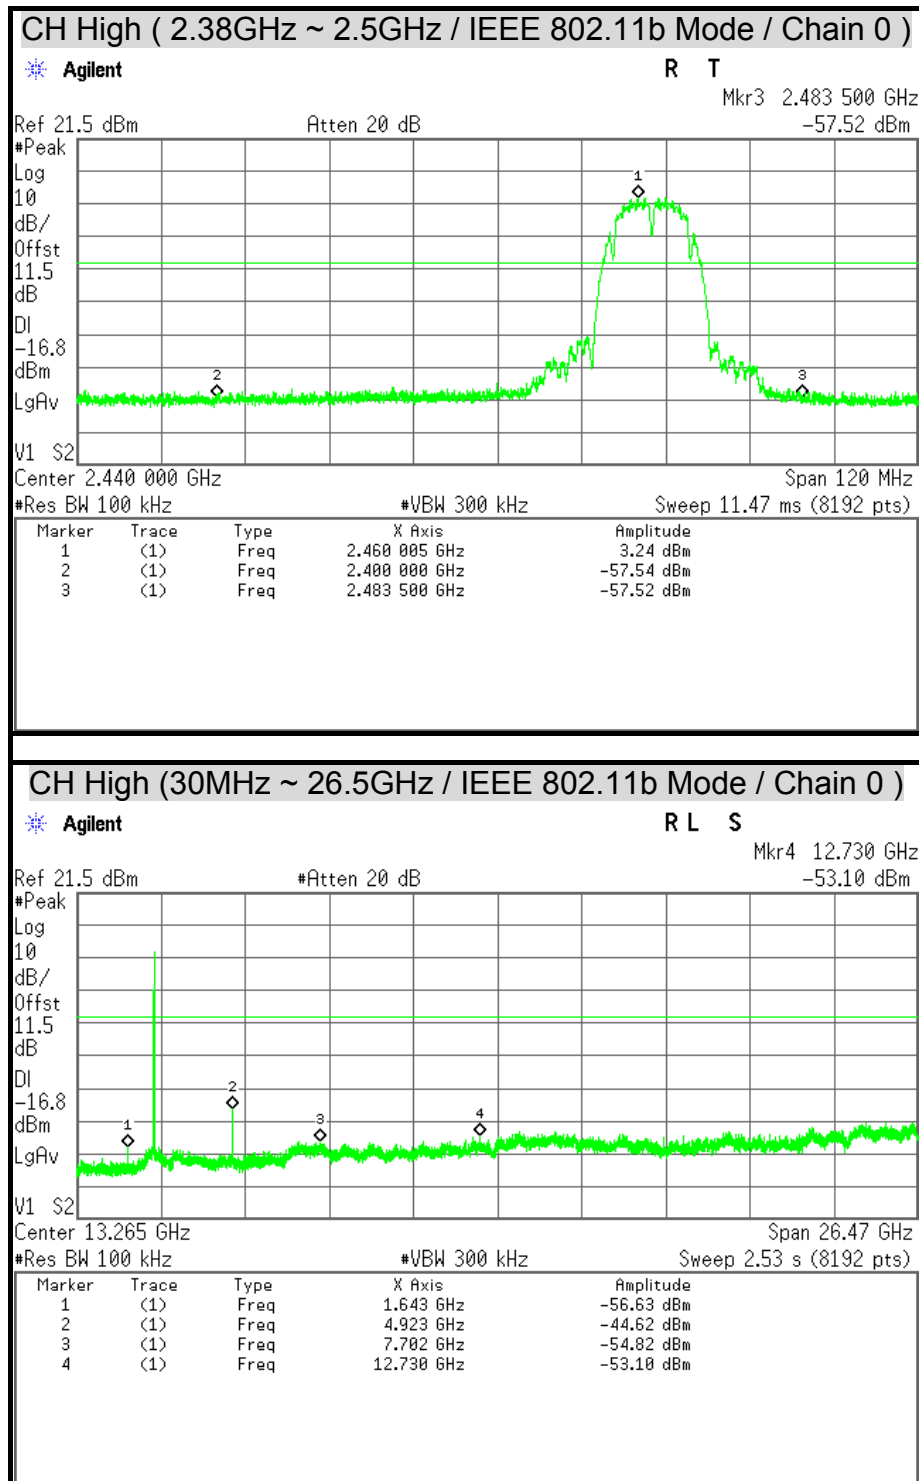


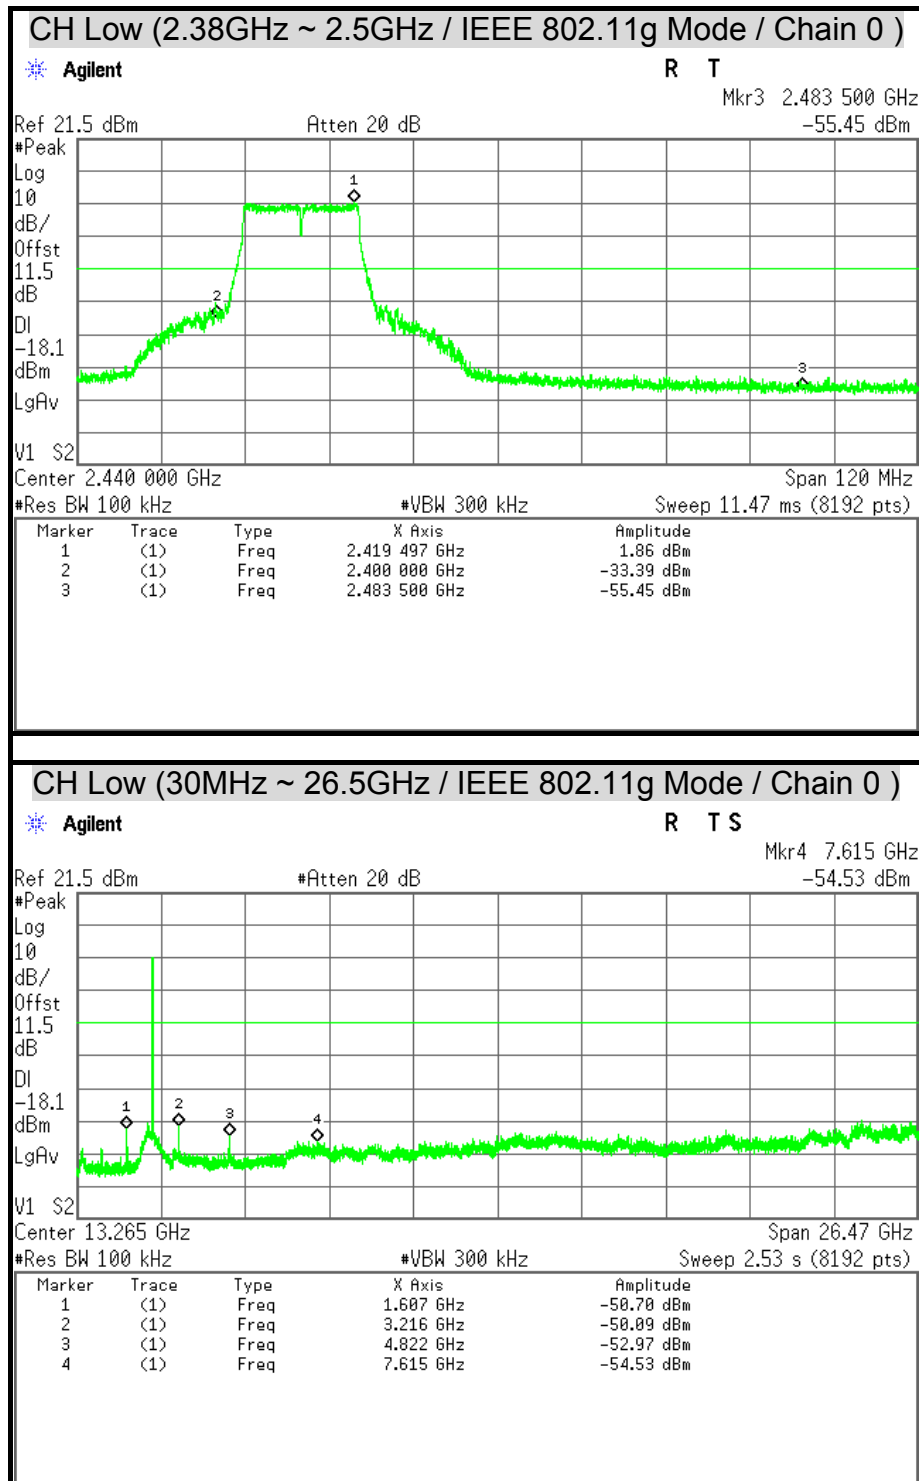



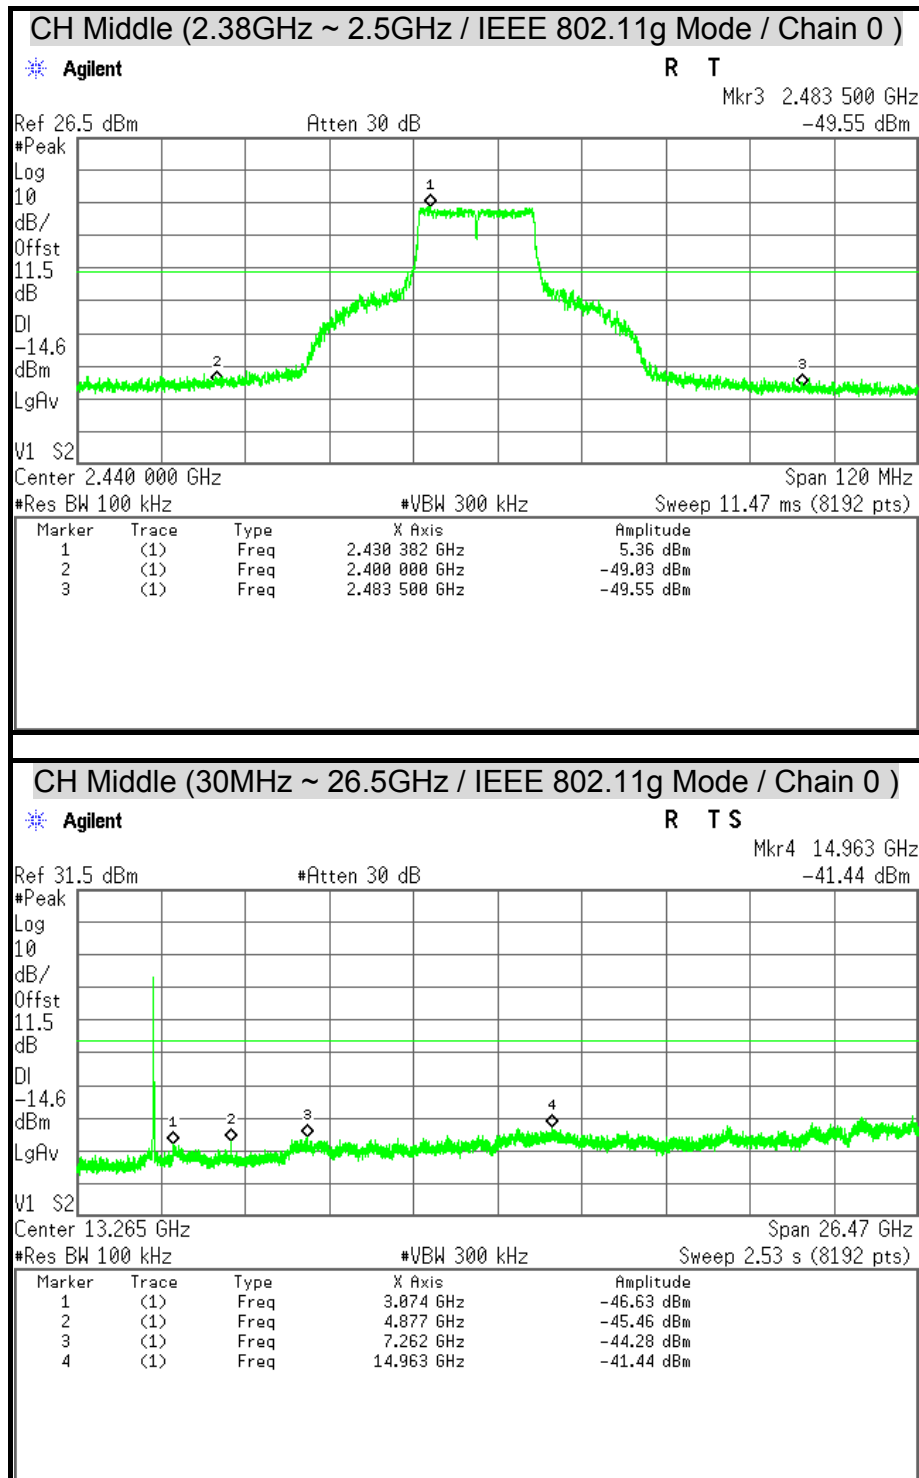


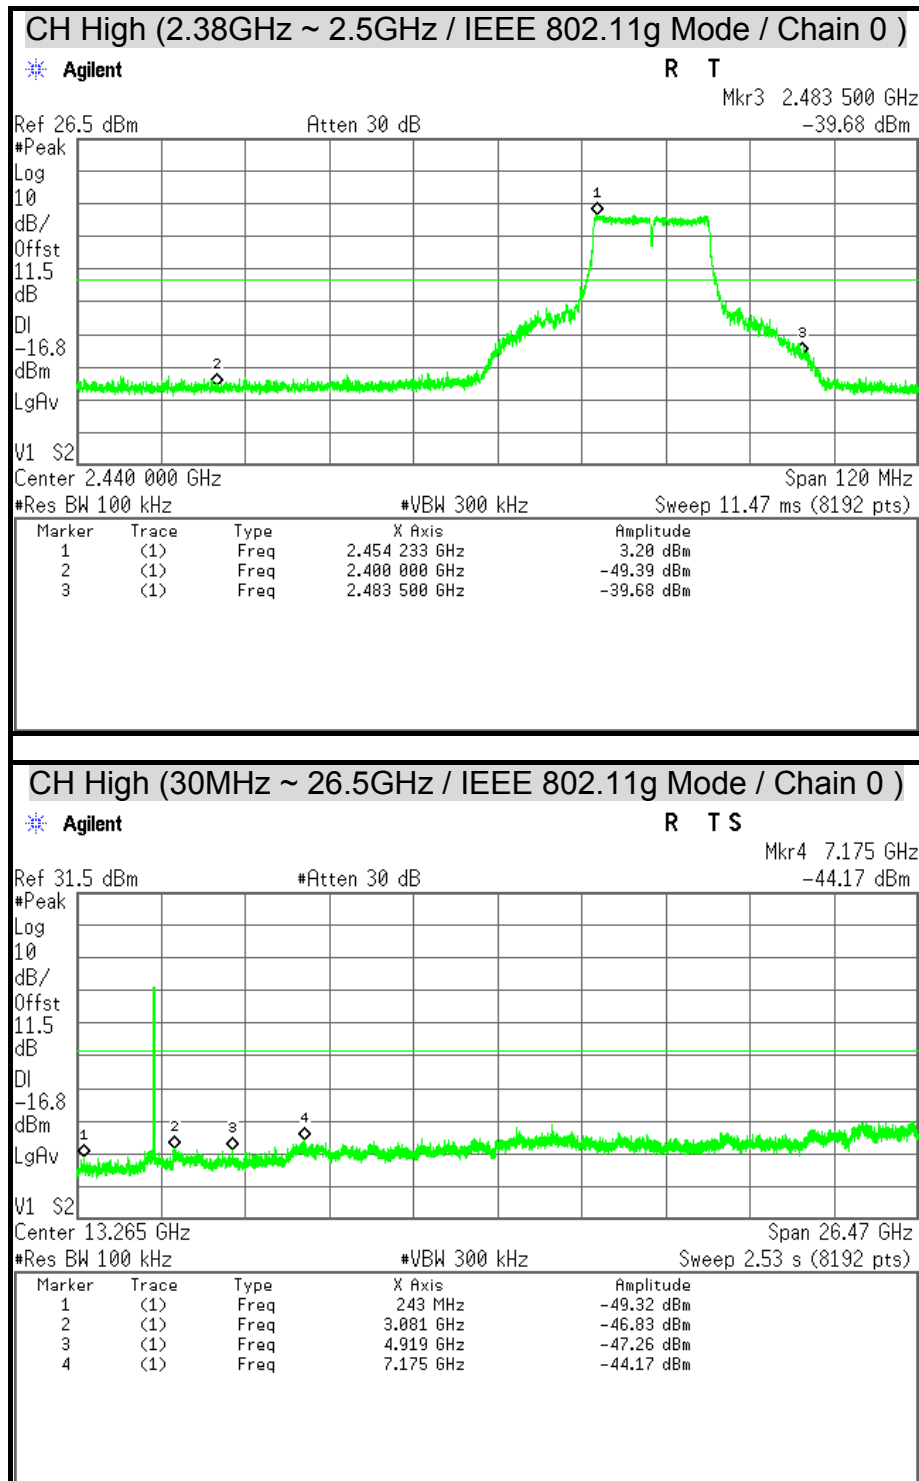


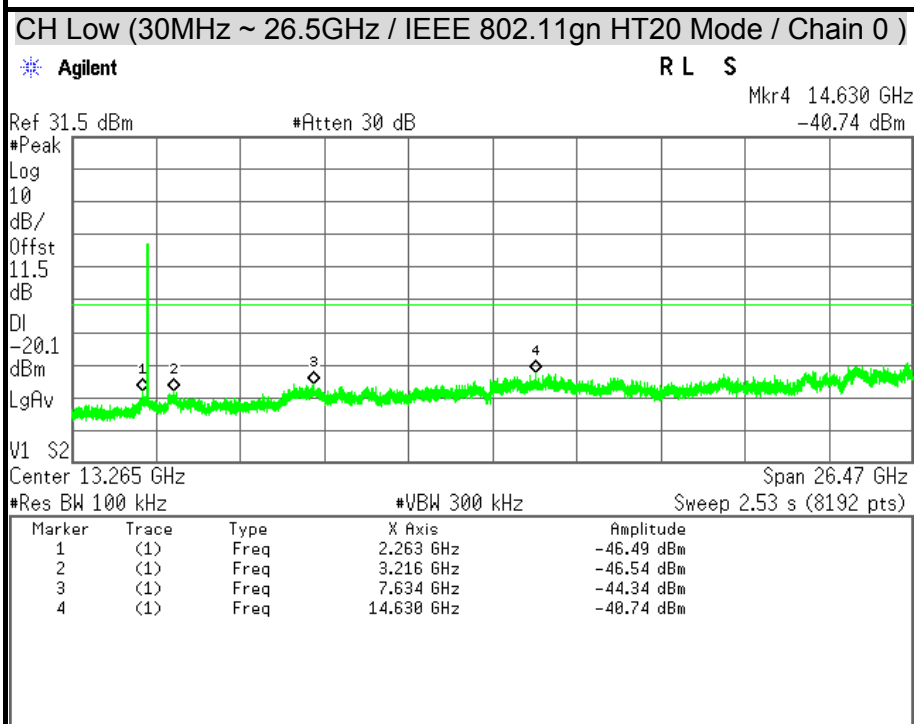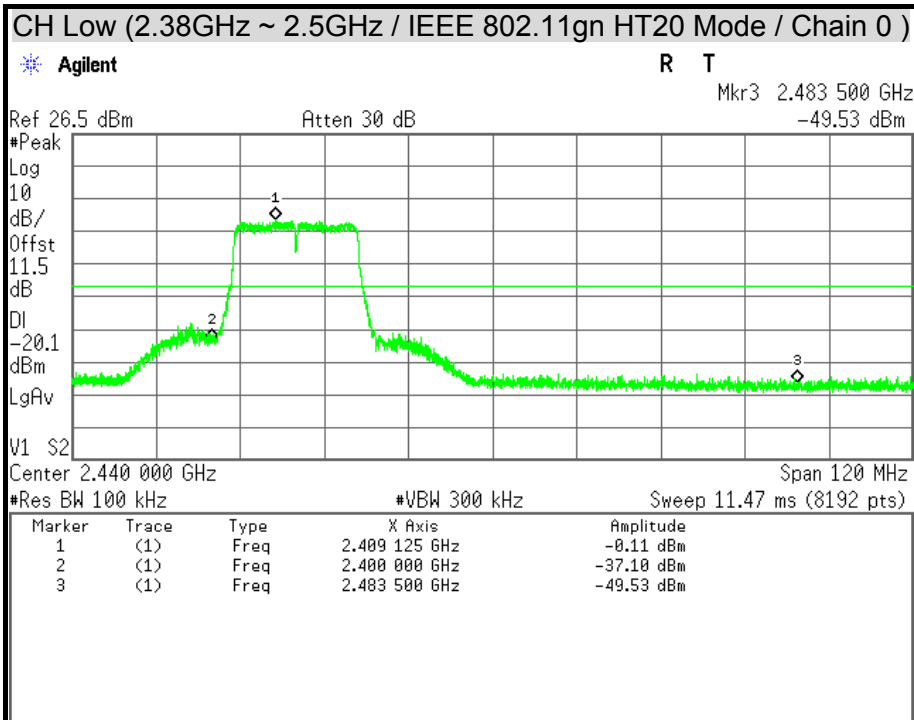



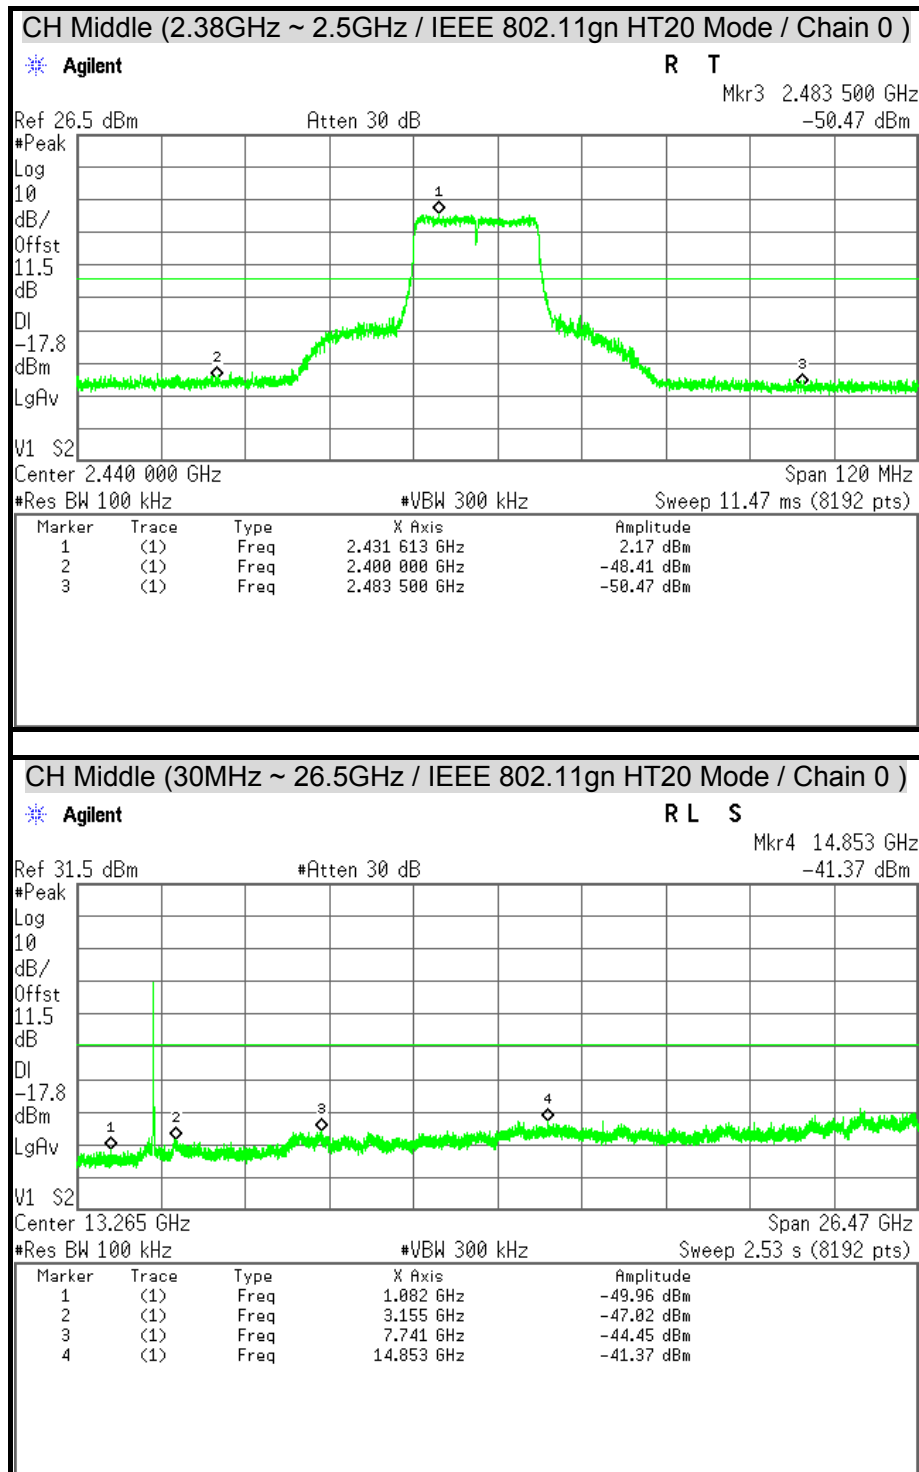


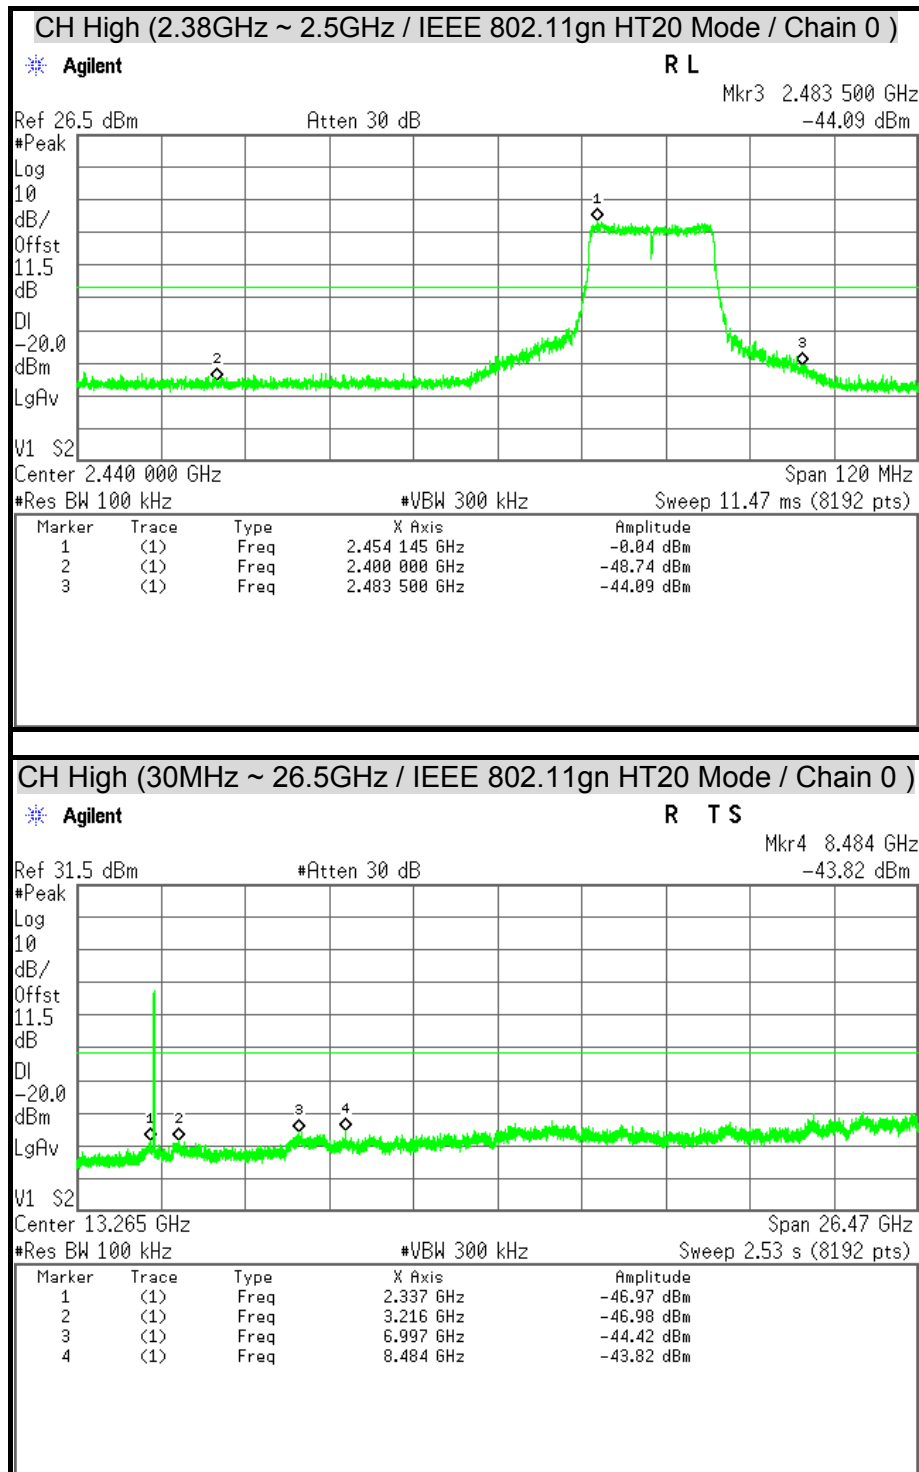


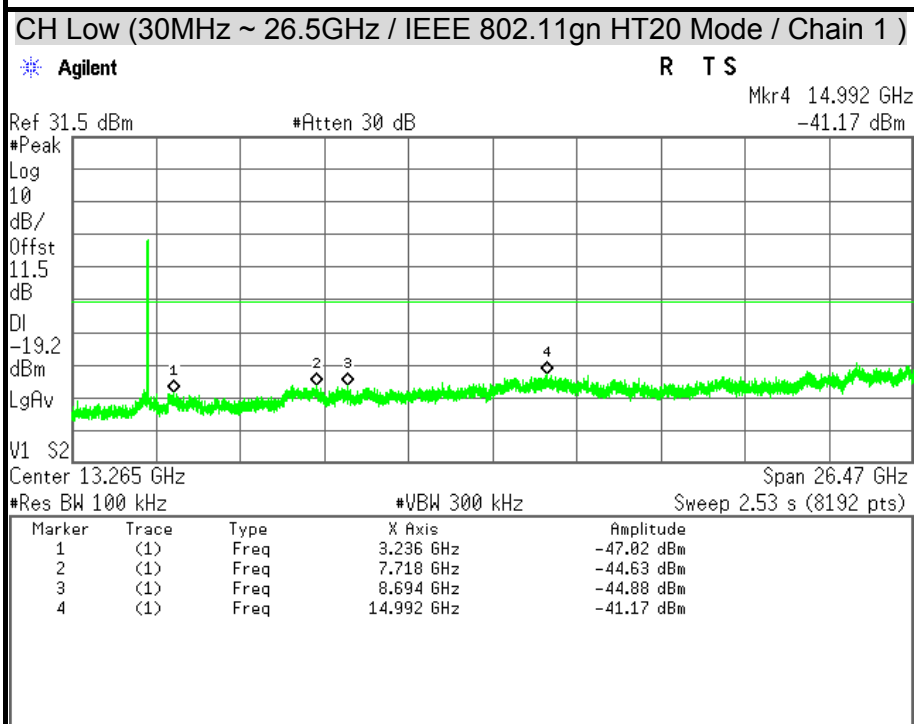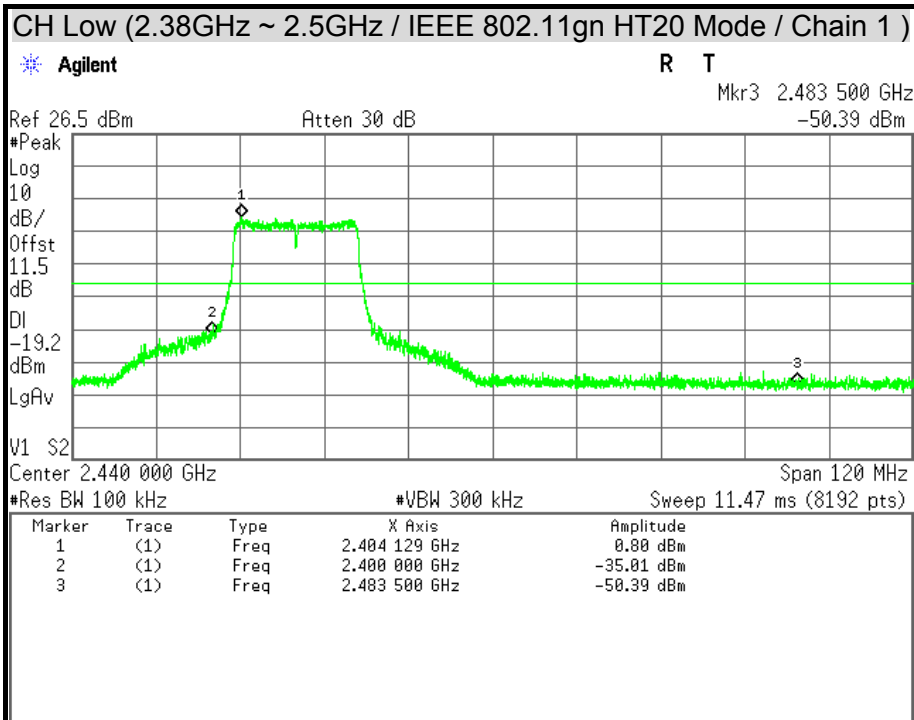


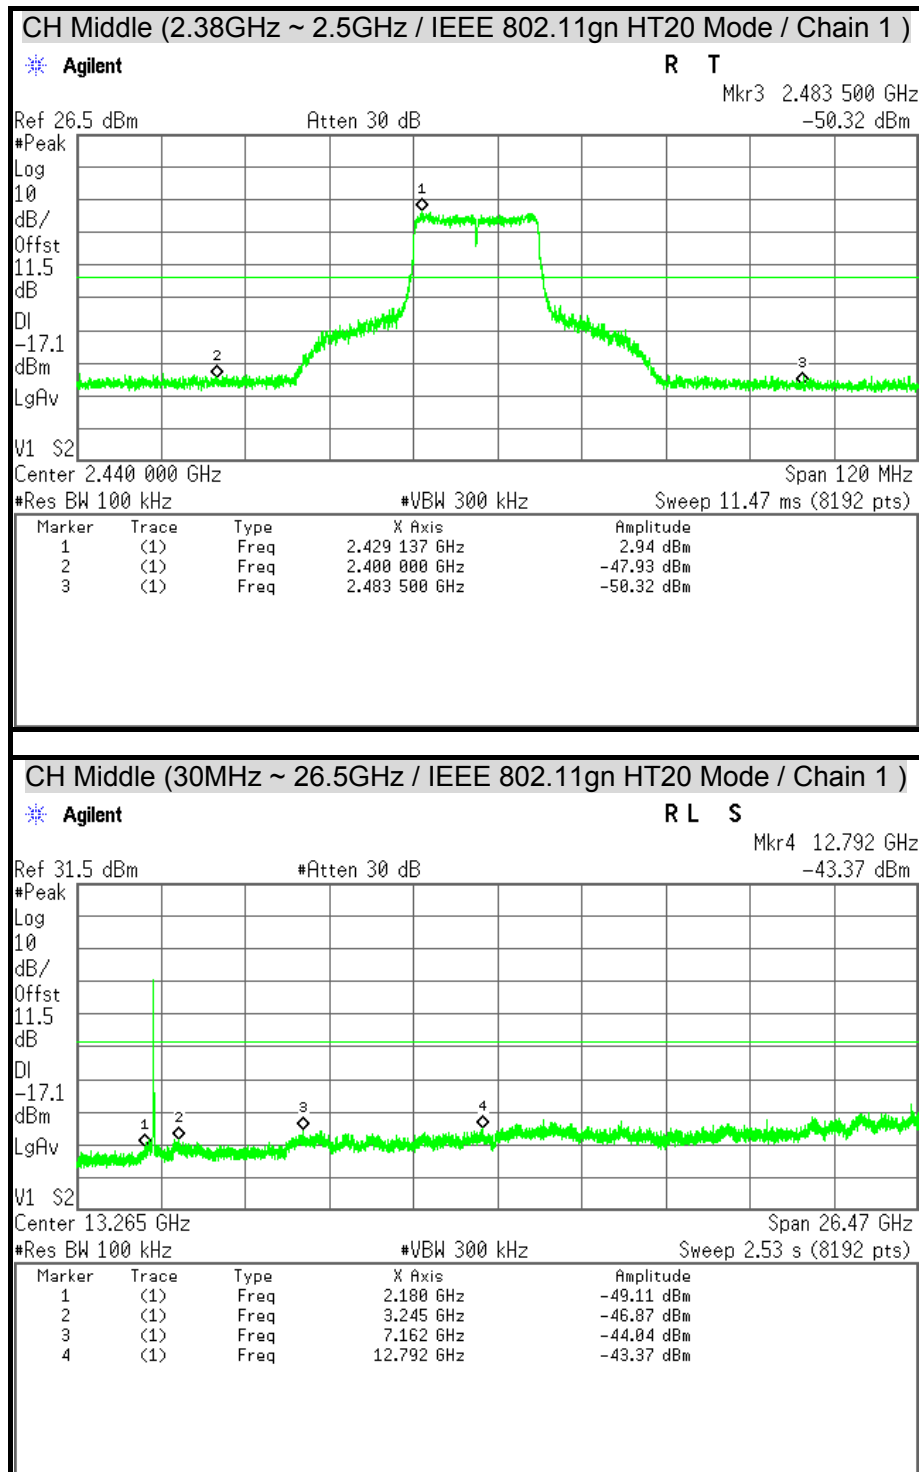

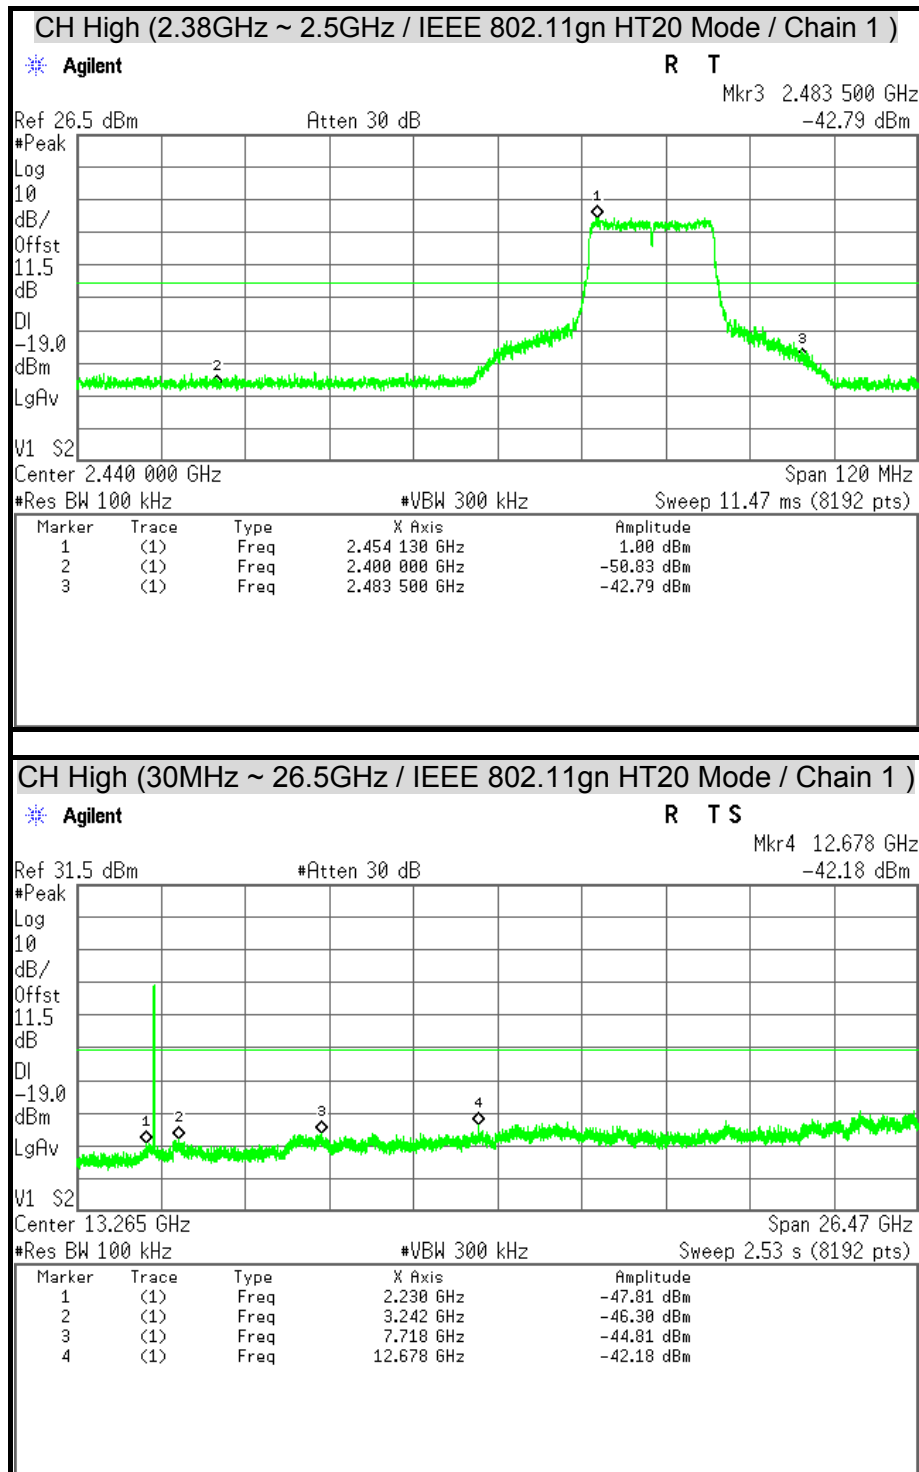

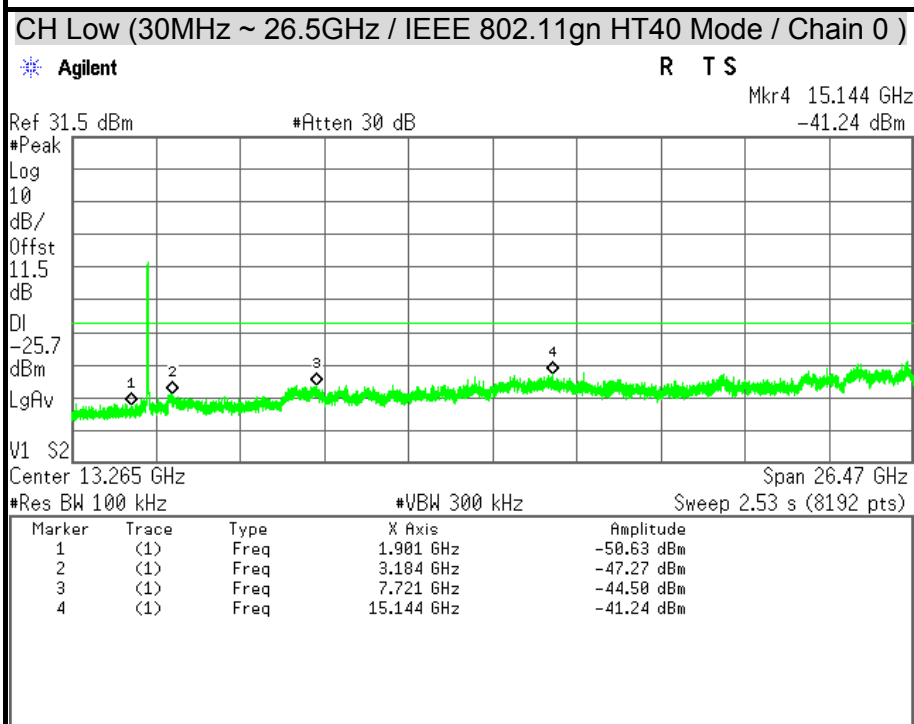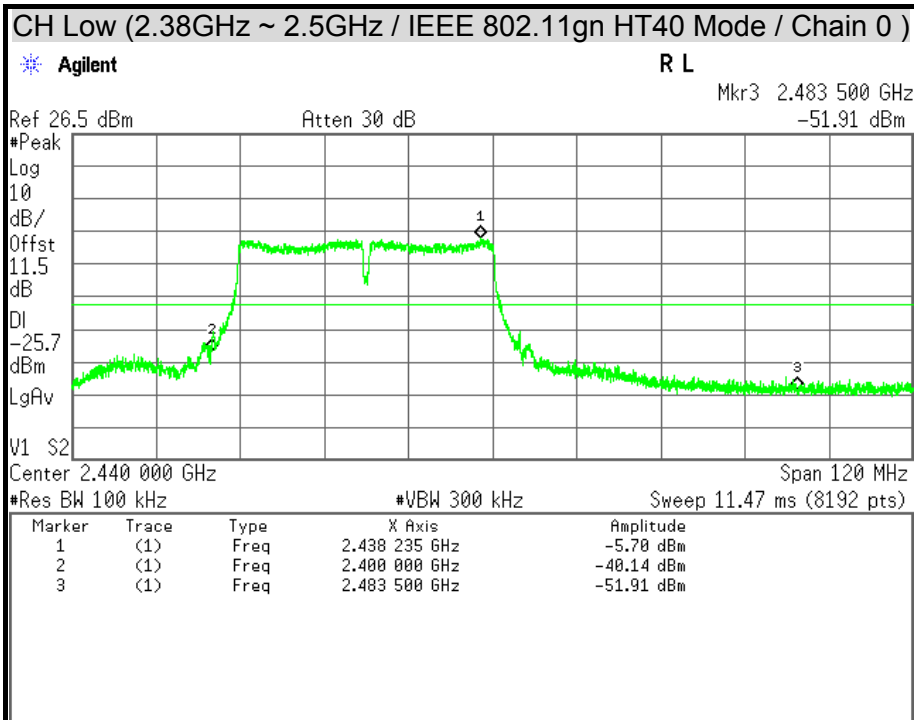

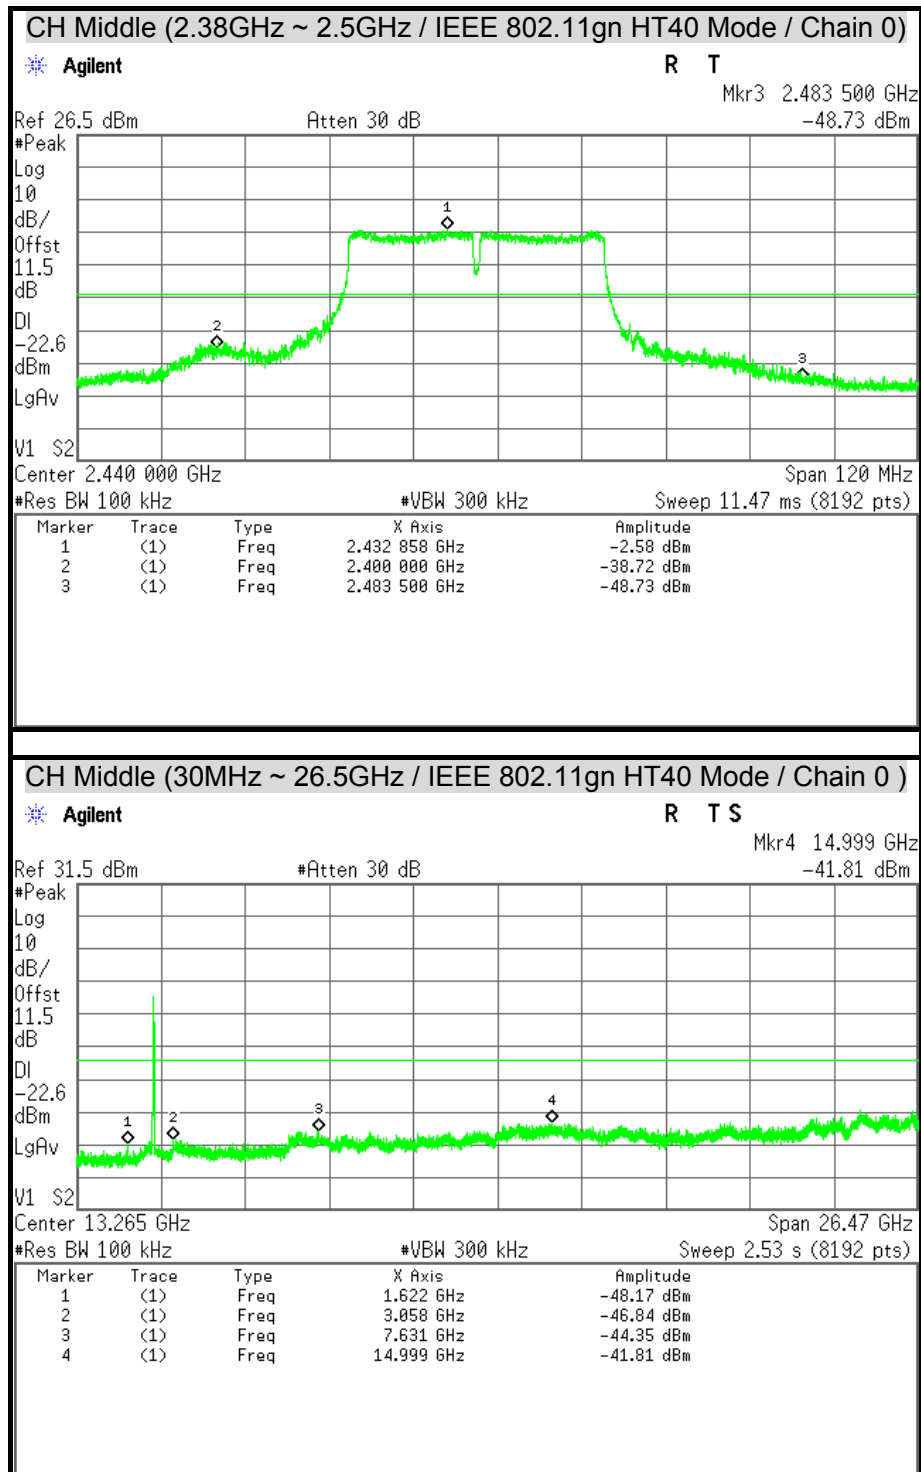

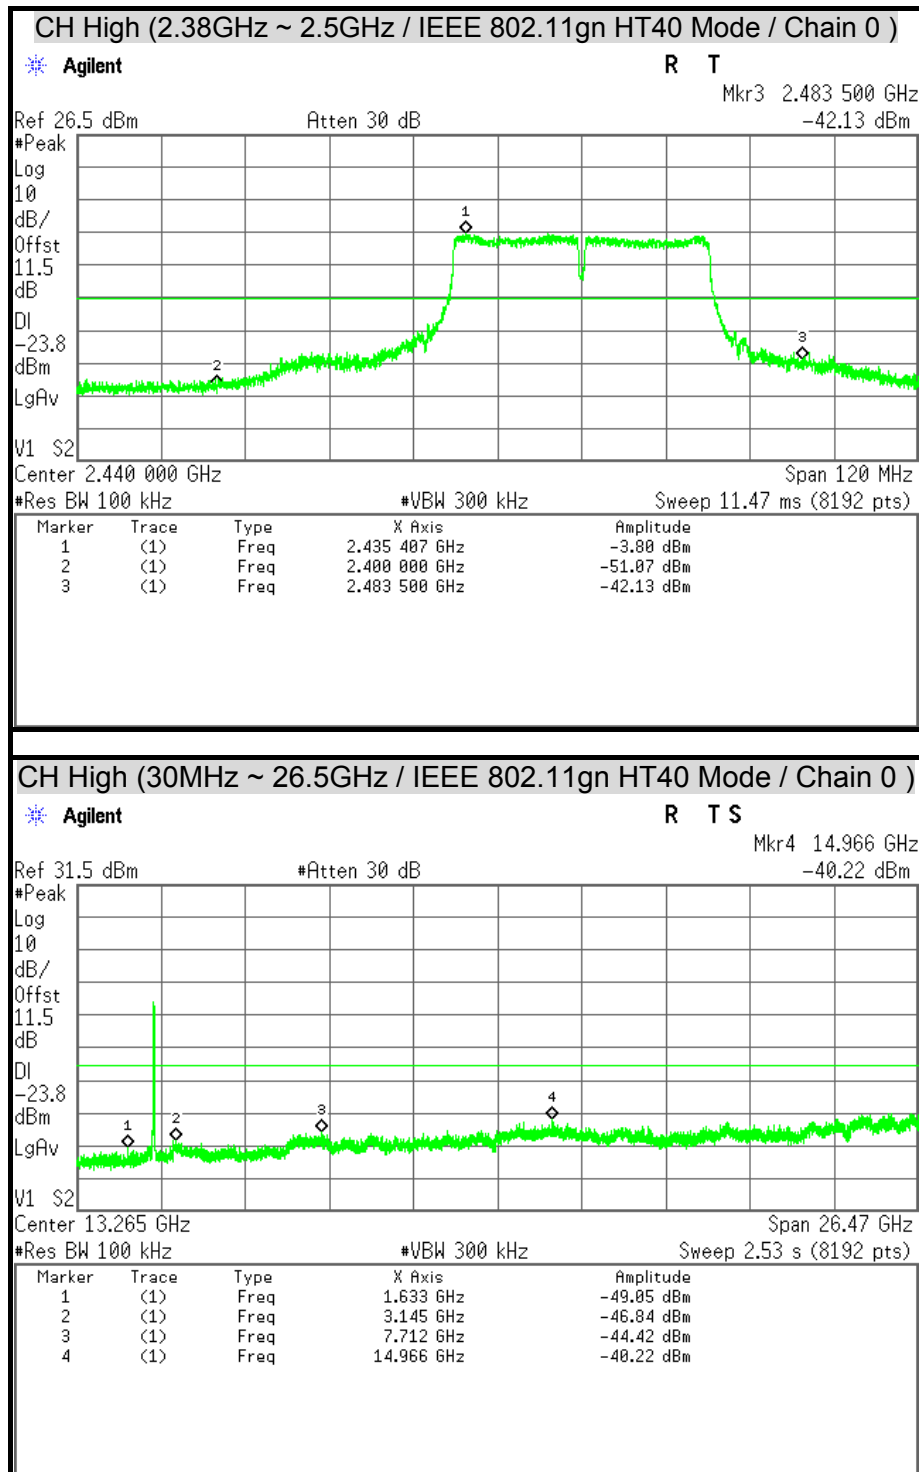



CH Low (2.38GHz ~ 2.5GHz / IEEE 802.11gn HT40 Mode / Chain 1)

Agilent

R L

Mkr3 2.483 500 GHz
-51.98 dBm

Ref 26.5 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

11.5

dB

DI

-25.3

dBm

LgAv

V1 S2

Center 2.440 000 GHz

Span 120 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 11.47 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.405 374 GHz	-5.33 dBm
2	(1)	Freq	2.400 000 GHz	-39.02 dBm
3	(1)	Freq	2.483 500 GHz	-51.98 dBm

CH Low (30MHz ~ 26.5GHz / IEEE 802.11gn HT40 Mode / Chain 1)

Agilent

R L S

Mkr4 13.874 GHz
-41.44 dBm

Ref 31.5 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

11.5

dB

DI

-25.3

dBm

LgAv

V1 S2

Center 13.265 GHz


Span 26.47 GHz


#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.53 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.168 GHz	-48.71 dBm
2	(1)	Freq	3.213 GHz	-46.60 dBm
3	(1)	Freq	7.737 GHz	-44.53 dBm
4	(1)	Freq	13.874 GHz	-41.44 dBm

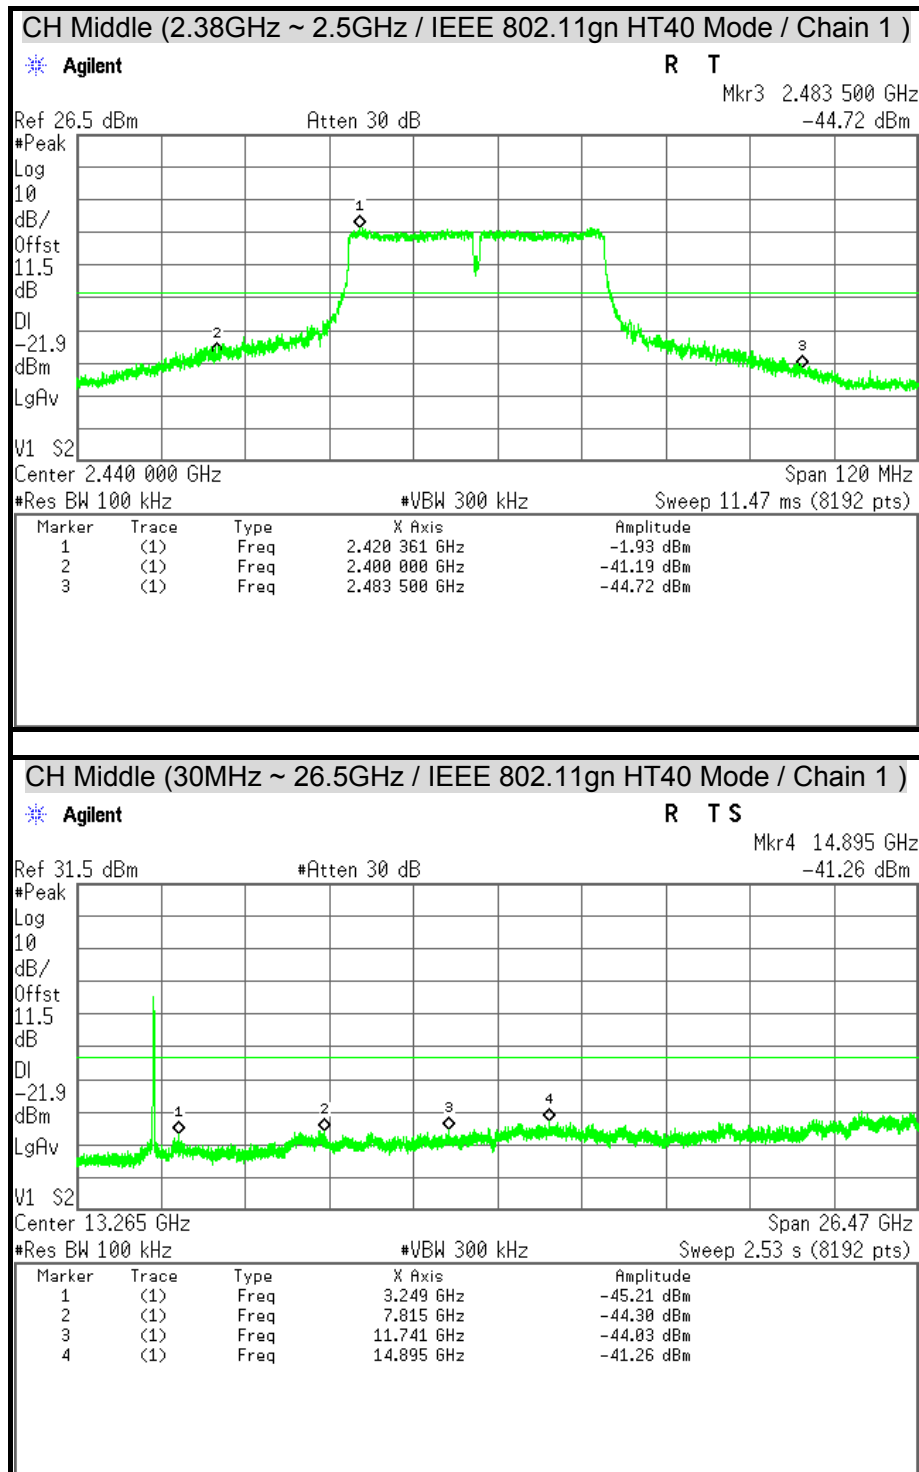

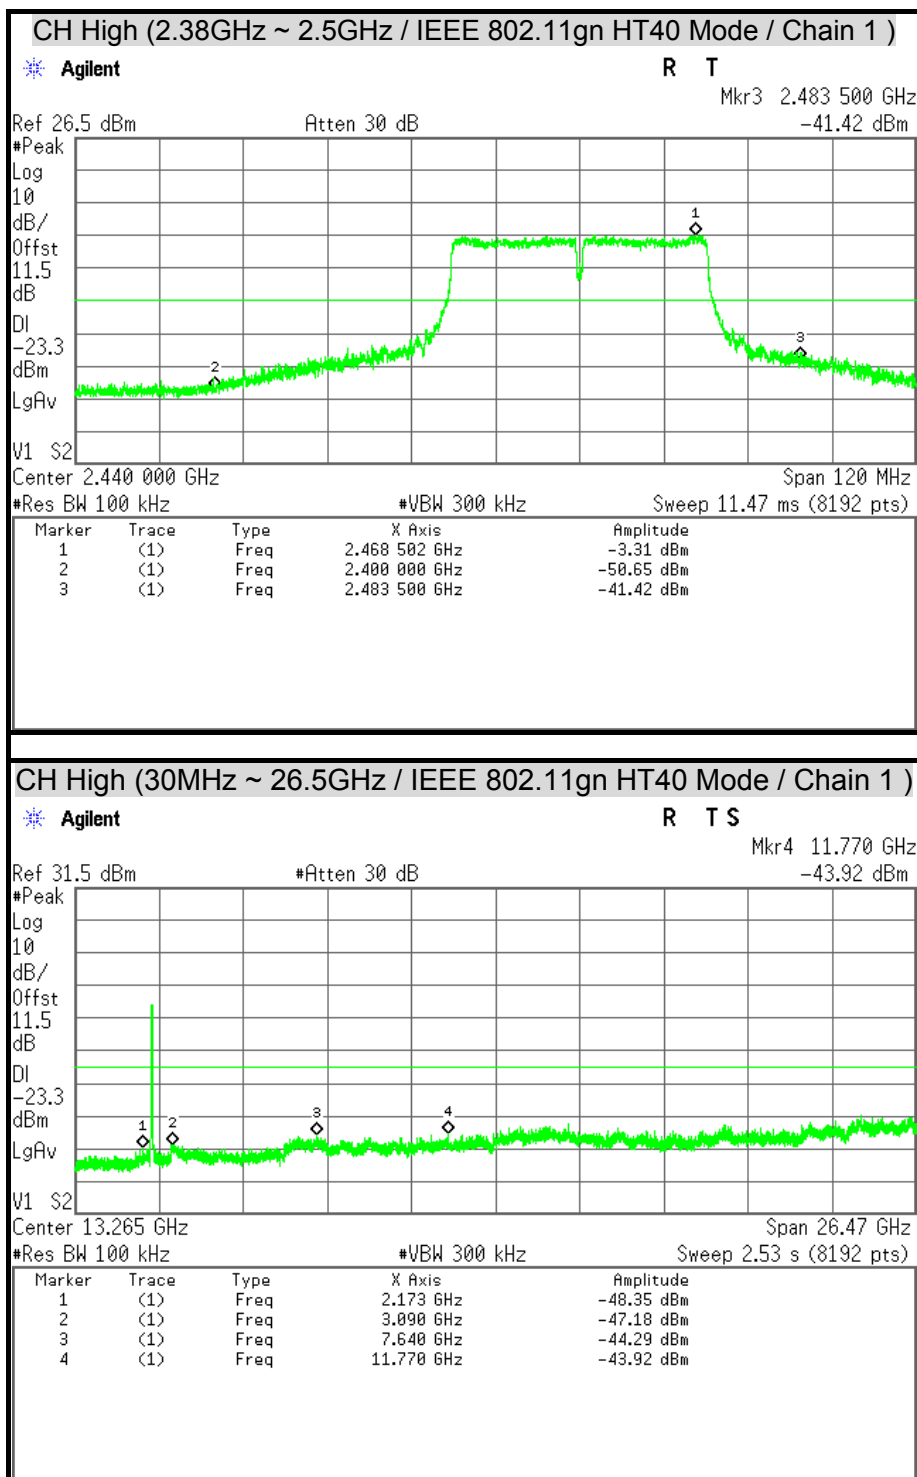

**7.6 RADIATED EMISSION****LIMITS**

(1) According to § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Remark:

1. ¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
2. ² Above 38.6

(2) According to § 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



- (3) According to § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

Remark: **Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

- (4) According to § 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

**TEST EQUIPMENT****Radiated Emission / 966Chamber_A**

Name of Equipment	Manufacture	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2015
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100221	04/28/2015
Bi-log Antenna	SCHWARZBECK	VULB 9168	9168-249	09/12/2014
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-778	09/12/2014
Pre-Amplifier	Agilent	8449B	3008A01471	07/15/2015
Pre-Amplifier	HP	8447F	2944A03748	07/15/2015
Band Reject Notch Filter	Micro-Tronics	BRM05702-01	009	N.C.R

Remark: 1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R = No Calibration Request.

Radiated Emission / 966Chamber_B

Name of Equipment	Manufacture	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/15/2015
EMI Test Receiver	ROHDE & SCHWARZ	ESCS 30	835418/008	10/16/2014
Bi-log Antenna	SCHWARZBECK	VULB 9168	9168-250	09/12/2014
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-778	09/12/2014
Double-Ridged Waveguide Horn	ETS-LINDGREN	3117	00078733	12/05/2014
Horn Antenna	COM-POWER	AH-840	03077	12/18/2014
Pre-Amplifier	Agilent	8447D	2944A10052	07/15/2015
Pre-Amplifier	Agilent	8449B	3008A01916	07/15/2015
LOOP Antenna	EMCO	6502	8905-2356	08/20/2014
Notch Filters Band Reject	Micro-Tronics	BRM05702-01	026	N.C.R


Remark: 1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R = No Calibration Request.




TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission below 1GHz.

9kHz ~ 30MHz

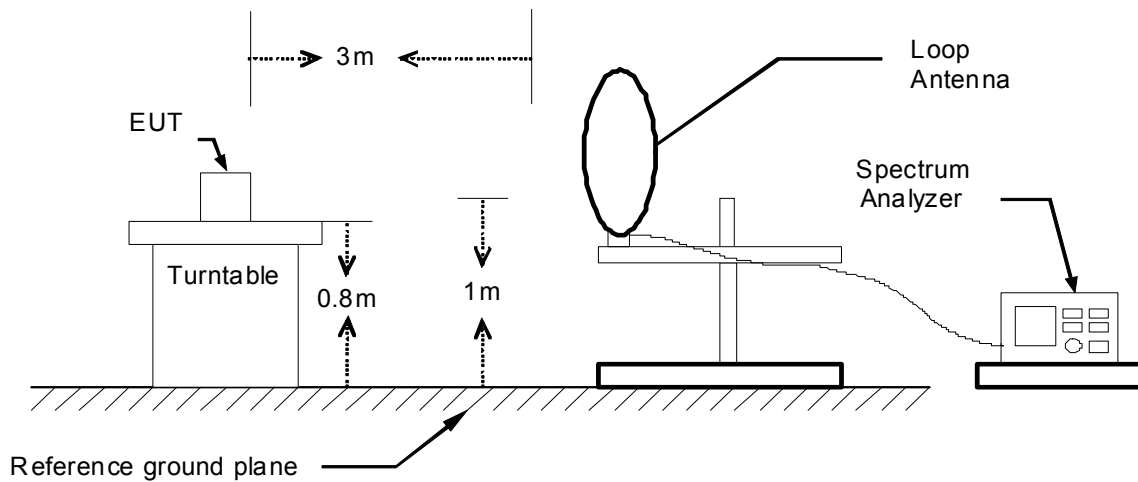


30MHz ~ 1GHz

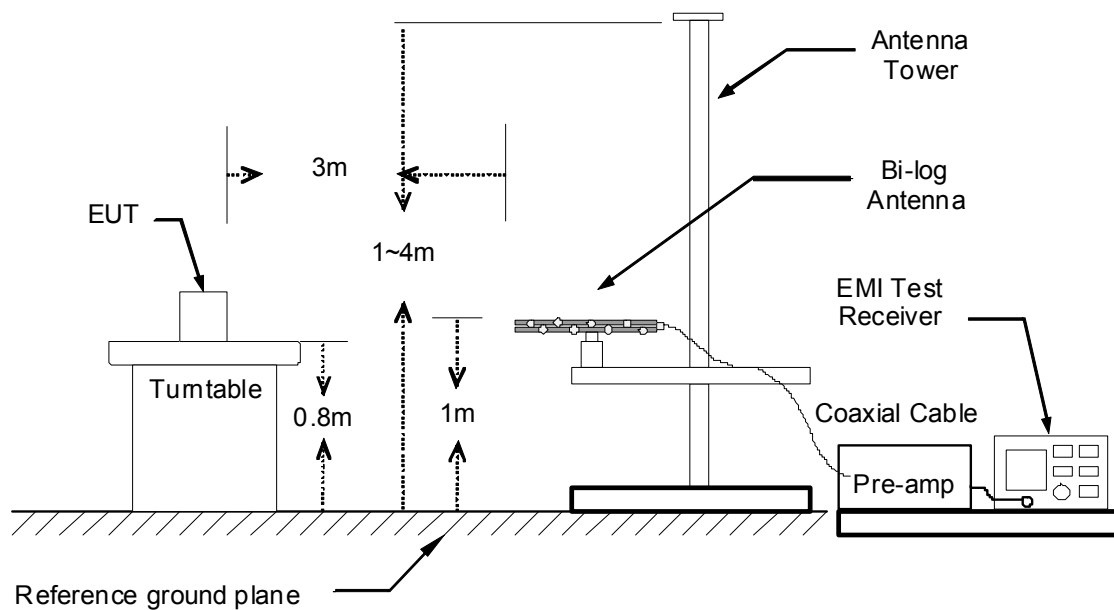



The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

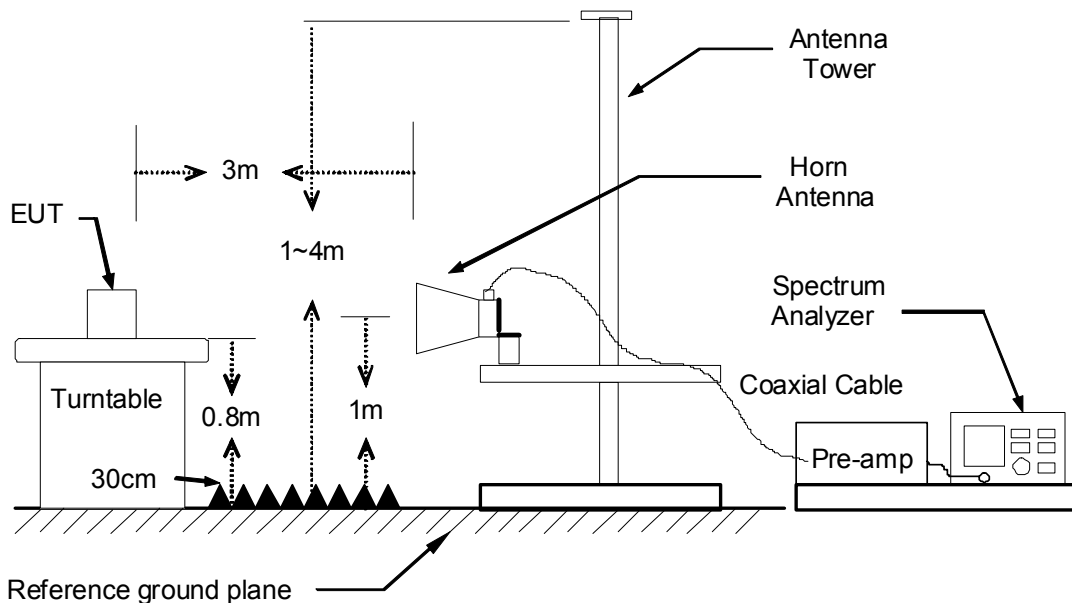

TEST PROCEDURE

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
2. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Remark :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

**TEST RESULTS****Below 1 GHz (9kHz ~ 1GHz)**

No emission found between lowest internal used/generated frequency to 1GHz.

Below 1 GHz (30MHz ~ 1GHz)

Product Name	Wireless Router	Test By	Ted Wu
Test Model	R-300NP	Test Date	2014/08/02
Test Mode	Normal Operating / Power Adapter 1	Temp. & Humidity	22°C, 52%

966 Chamber_A at 3Meter / Horizontal								
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (cm)	Remark
270.56	38.72	-9.82	28.90	46.00	-17.10	290.00	100.00	Peak
326.82	36.89	-8.23	28.67	46.00	-17.33	311.40	100.00	Peak
499.48	40.10	-3.98	36.13	46.00	-9.87	131.00	200.00	Peak
641.10	33.89	-1.28	32.61	46.00	-13.39	170.10	200.00	Peak
674.08	32.97	-0.78	32.19	46.00	-13.81	170.10	200.00	Peak
749.74	41.00	1.18	42.18	46.00	-3.82	148.80	100.00	Peak
774.96	38.44	1.28	39.73	46.00	-6.27	132.70	100.00	Peak
966 Chamber_A at 3Meter / Vertical								
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (cm)	Remark
68.80	45.23	-12.16	33.07	40.00	-6.93	160.60	100.00	Peak
192.96	40.96	-12.13	28.83	43.50	-14.67	356.70	100.00	Peak
499.48	39.70	-3.98	35.72	46.00	-10.28	175.40	100.00	Peak
580.96	36.72	-2.27	34.45	46.00	-11.55	355.70	100.00	Peak
677.96	37.56	-0.72	36.84	46.00	-9.16	31.10	300.00	Peak
749.74	34.24	1.18	35.43	46.00	-10.57	359.40	100.00	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
4. Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dBuV/m) - Quasi-peak limit (dBuV/m).



Product Name	Wireless Router	Test By	Ted Wu
Test Model	R-300NP	Test Date	2014/08/02
Test Mode	Normal Operating / Power Adapter 2	Temp. & Humidity	22°C, 52%

966 Chamber_A at 3Meter / Horizontal								
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (cm)	Remark
198.78	40.17	-12.50	27.67	43.50	-15.83	272.40	200.00	Peak
352.04	37.81	-7.56	30.25	46.00	-15.75	242.90	100.00	Peak
386.96	36.10	-6.68	29.42	46.00	-16.58	70.60	200.00	Peak
499.48	39.01	-3.98	35.03	46.00	-10.97	125.90	200.00	Peak
580.96	43.60	-2.27	41.33	46.00	-4.67	160.80	300.00	Peak
749.74	41.42	1.18	42.61	46.00	-3.39	133.70	100.00	Peak
774.96	38.10	1.28	39.38	46.00	-6.62	133.70	100.00	Peak
966 Chamber_A at 3Meter / Vertical								
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (cm)	Remark
62.98	43.75	-10.67	33.08	40.00	-6.92	121.60	100.00	Peak
76.56	46.74	-14.04	32.71	40.00	-7.29	128.20	100.00	Peak
499.48	38.61	-3.98	34.63	46.00	-11.37	218.10	100.00	Peak
580.96	37.87	-2.27	35.60	46.00	-10.40	257.40	200.00	Peak
749.74	34.84	1.18	36.02	46.00	-9.98	0.00	100.00	Peak
774.96	32.56	1.28	33.85	46.00	-12.15	185.90	100.00	Peak
806.00	34.09	1.48	35.58	46.00	-10.42	183.20	100.00	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
4. Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dBuV/m) - Quasi-peak limit (dBuV/m).



Product Name	Wireless Router	Test By	Ted Wu
Test Model	R-300NP	Test Date	2014/08/02
Test Mode	Normal Operating / PoE	Temp. & Humidity	22°C, 52%

966 Chamber_A at 3Meter / Horizontal								
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (cm)	Remark
499.48	40.76	-3.98	36.79	46.00	-9.21	62.40	100.00	Peak
580.96	40.28	-2.27	38.01	46.00	-7.99	55.30	200.00	Peak
635.28	33.32	-1.36	31.96	46.00	-14.04	163.40	100.00	Peak
672.14	33.37	-0.81	32.56	46.00	-13.44	177.00	100.00	Peak
749.74	40.82	1.18	42.00	46.00	-4.00	140.50	100.00	Peak
774.96	37.35	1.28	38.63	46.00	-7.37	154.80	200.00	Peak
966 Chamber_A at 3Meter / Vertical								
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (cm)	Remark
43.58	40.09	-10.08	30.01	40.00	-9.99	163.10	100.00	Peak
76.56	42.75	-14.04	28.71	40.00	-11.29	102.70	100.00	Peak
107.60	44.45	-13.81	30.64	43.50	-12.86	129.60	100.00	Peak
192.96	42.56	-12.13	30.43	43.50	-13.07	164.60	100.00	Peak
499.48	39.86	-3.98	35.88	46.00	-10.12	266.70	100.00	Peak
774.96	34.73	1.28	36.01	46.00	-9.99	309.90	100.00	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
4. Result (dBμV/m) = Reading (dBμV) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dBμV/m) - Quasi-peak limit (dBμV/m).



Above 1 GHz

Product Name	Wireless Router	Test By	Rex Chiu
Test Model	R-300NP	Test Date	2014/08/04
Test Mode	IEEE 802.11b TX / CH Low	Temp. & Humidity	30°C, 56%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1256.00	46.02	---	-2.89	43.13	---	74.00	54.00	-10.87	Peak
2062.00	44.39	---	1.94	46.34	---	74.00	54.00	-7.66	Peak
2678.00	43.35	---	3.26	46.62	---	74.00	54.00	-7.38	Peak
4830.00	39.71	---	8.09	47.80	---	74.00	54.00	-6.20	Peak
5550.00	39.82	---	9.46	49.27	---	74.00	54.00	-4.73	Peak
6195.00	38.84	---	11.37	50.21	---	74.00	54.00	-3.79	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2124.00	44.23	---	2.07	46.30	---	74.00	54.00	-7.70	Peak
2250.00	48.41	---	2.32	50.72	---	74.00	54.00	-3.28	Peak
2574.00	46.56	---	3.00	49.56	---	74.00	54.00	-4.44	Peak
4830.00	48.24	45.25	8.09	56.33	53.34	74.00	54.00	-0.66	AVG
5700.00	39.32	---	9.91	49.22	---	74.00	54.00	-4.78	Peak
6450.00	38.83	---	12.12	50.96	---	74.00	54.00	-3.04	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
 Margin = Result - Limit
 Remark Peak = Result(PK) - Limit(AV)
 Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless Router	Test By	Rex Chiu
Test Model	R-300NP	Test Date	2014/08/04
Test Mode	IEEE 802.11b TX / CH Middle	Temp. & Humidity	30°C, 56%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2076.00	44.16	---	1.97	46.13	---	74.00	54.00	-7.87	Peak
2268.00	43.33	---	2.35	45.68	---	74.00	54.00	-8.32	Peak
2496.00	43.49	---	2.80	46.29	---	74.00	54.00	-7.71	Peak
3690.00	41.62	---	5.01	46.63	---	74.00	54.00	-7.37	Peak
4875.00	40.12	---	8.18	48.31	---	74.00	54.00	-5.69	Peak
5925.00	38.49	---	10.58	49.07	---	74.00	54.00	-4.93	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2242.00	46.61	---	2.30	48.91	---	74.00	54.00	-5.09	Peak
2378.00	47.74	---	2.57	50.31	---	74.00	54.00	-3.69	Peak
2602.00	46.62	---	3.07	49.69	---	74.00	54.00	-4.31	Peak
4875.00	48.30	45.45	8.18	56.48	53.63	74.00	54.00	-0.37	AVG
5430.00	39.03	---	9.19	48.21	---	74.00	54.00	-5.79	Peak
6015.00	38.85	---	10.84	49.69	---	74.00	54.00	-4.31	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
 Margin = Result - Limit
 Remark Peak = Result(PK) - Limit(AV)
 Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless Router	Test By	Rex Chiu
Test Model	R-300NP	Test Date	2014/08/04
Test Mode	IEEE 802.11b TX / CH High	Temp. & Humidity	30°C, 56%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1116.00	45.78	---	-2.88	42.90	---	74.00	54.00	-11.10	Peak
2236.00	43.86	---	2.29	46.14	---	74.00	54.00	-7.86	Peak
2842.00	43.42	---	3.68	47.10	---	74.00	54.00	-6.90	Peak
4920.00	42.29	---	8.28	50.56	---	74.00	54.00	-3.44	Peak
5850.00	38.72	---	10.35	49.07	---	74.00	54.00	-4.93	Peak
6630.00	39.28	---	12.23	51.52	---	74.00	54.00	-2.48	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2250.00	47.41	---	2.32	49.72	---	74.00	54.00	-4.28	Peak
2376.00	46.78	---	2.56	49.35	---	74.00	54.00	-4.65	Peak
2556.00	46.53	---	2.95	49.48	---	74.00	54.00	-4.52	Peak
4920.00	48.30	44.98	8.28	56.58	53.26	74.00	54.00	-0.74	AVG
5610.00	39.51	---	9.64	49.15	---	74.00	54.00	-4.85	Peak
6690.00	38.67	---	12.22	50.89	---	74.00	54.00	-3.11	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless Router	Test By	Rex Chiu
Test Model	R-300NP	Test Date	2014/08/04
Test Mode	IEEE 802.11g TX / CH Low	Temp. & Humidity	28°C, 54%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2226.00	48.15	---	2.27	50.42	---	74.00	54.00	-3.58	Peak
2258.00	48.18	---	2.33	50.51	---	74.00	54.00	-3.49	Peak
2886.00	45.30	---	3.79	49.09	---	74.00	54.00	-4.91	Peak
4830.00	40.06	---	8.09	48.15	---	74.00	54.00	-5.85	Peak
5730.00	39.24	---	10.00	49.24	---	74.00	54.00	-4.76	Peak
6465.00	38.54	---	12.17	50.71	---	74.00	54.00	-3.29	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2020.00	46.27	---	1.86	48.13	---	74.00	54.00	-5.87	Peak
2240.00	55.81	43.26	2.30	58.10	45.56	74.00	54.00	-8.44	Peak
2564.00	52.01	38.13	2.97	54.98	41.10	74.00	54.00	-13.90	Peak
3210.00	43.52	---	4.25	47.77	---	74.00	54.00	-6.23	Peak
4830.00	41.68	---	8.09	49.77	---	74.00	54.00	-4.23	Peak
7230.00	38.03	---	12.84	50.87	---	74.00	54.00	-3.13	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless Router	Test By	Rex Chiu
Test Model	R-300NP	Test Date	2014/08/04
Test Mode	IEEE 802.11g TX / CH Middle	Temp. & Humidity	28°C, 54%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1624.00	47.80	---	-1.73	46.07	---	74.00	54.00	-7.93	Peak
2240.00	48.30	---	2.30	50.60	---	74.00	54.00	-3.40	Peak
2560.00	46.43	---	2.96	49.39	---	74.00	54.00	-4.61	Peak
4875.00	42.78	---	8.18	50.96	---	74.00	54.00	-3.04	Peak
5580.00	41.02	---	9.55	50.57	---	74.00	54.00	-3.43	Peak
6345.00	38.12	---	11.81	49.94	---	74.00	54.00	-4.06	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1542.00	50.25	---	-2.50	47.75	---	74.00	54.00	-6.25	Peak
2244.00	55.46	42.35	2.30	57.76	44.65	74.00	54.00	-9.35	AVG
2390.00	54.68	42.25	2.59	57.27	44.84	74.00	54.00	-9.16	AVG
2484.00	54.19	38.70	2.78	56.97	41.48	74.00	54.00	-12.52	AVG
4875.00	50.53	37.44	8.18	58.71	45.62	74.00	54.00	-8.38	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
 Margin = Result - Limit
 Remark Peak = Result(PK) - Limit(AV)
 Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless Router	Test By	Rex Chiu
Test Model	R-300NP	Test Date	2014/08/04
Test Mode	IEEE 802.11g TX / CH High	Temp. & Humidity	28°C, 54%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2242.00	48.10	---	2.30	50.40	---	74.00	54.00	-3.60	Peak
2518.00	46.88	---	2.86	49.74	---	74.00	54.00	-4.26	Peak
2742.00	45.96	---	3.42	49.39	---	74.00	54.00	-4.61	Peak
4920.00	43.62	---	8.28	51.89	---	74.00	54.00	-2.11	Peak
5670.00	39.68	---	9.82	49.49	---	74.00	54.00	-4.51	Peak
7380.00	38.01	---	13.31	51.32	---	74.00	54.00	-2.68	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2250.00	56.49	43.58	2.32	58.81	45.90	74.00	54.00	-8.10	AVG
2348.00	54.68	41.53	2.51	57.19	44.04	74.00	54.00	-9.96	AVG
2582.00	52.84	38.24	3.02	55.85	41.26	74.00	54.00	-12.74	AVG
4920.00	50.52	36.75	8.28	58.80	45.03	74.00	54.00	-8.97	AVG
5670.00	39.12	---	9.82	48.94	---	74.00	54.00	-5.06	Peak
6330.00	38.84	---	11.77	50.61	---	74.00	54.00	-3.39	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless Router	Test By	Rex Chiu
Test Model	R-300NP	Test Date	2014/08/04
Test Mode	IEEE 802.11gn HT20 TX / CH Low	Temp. & Humidity	28°C, 54%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2074.00	46.61	---	1.97	48.57	---	74.00	54.00	-5.43	Peak
2244.00	48.23	---	2.30	50.53	---	74.00	54.00	-3.47	Peak
2488.00	47.12	---	2.79	49.91	---	74.00	54.00	-4.09	Peak
4830.00	38.99	---	8.09	47.08	---	74.00	54.00	-6.92	Peak
5625.00	39.14	---	9.68	48.83	---	74.00	54.00	-5.17	Peak
6255.00	39.41	---	11.55	50.96	---	74.00	54.00	-3.04	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1630.00	52.26	---	-1.67	50.59	---	74.00	54.00	-3.41	Peak
2256.00	59.16	47.25	2.33	61.48	49.58	74.00	54.00	-4.42	AVG
2584.00	53.34	41.23	3.02	56.37	44.25	74.00	54.00	-9.75	AVG
3210.00	45.29	---	4.25	49.54	---	74.00	54.00	-4.46	Peak
4830.00	41.96	---	8.09	50.05	---	74.00	54.00	-3.95	Peak
6015.00	39.60	---	10.84	50.45	---	74.00	54.00	-3.55	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless Router	Test By	Rex Chiu
Test Model	R-300NP	Test Date	2014/08/04
Test Mode	IEEE 802.11gn HT20 TX / CH Middle	Temp. & Humidity	28°C, 54%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1624.00	47.91	---	-1.73	46.19	---	74.00	54.00	-7.81	Peak
2286.00	48.08	---	2.39	50.47	---	74.00	54.00	-3.53	Peak
2520.00	47.45	---	2.86	50.31	---	74.00	54.00	-3.69	Peak
4425.00	40.37	---	7.18	47.55	---	74.00	54.00	-6.45	Peak
4875.00	40.50	---	8.18	48.68	---	74.00	54.00	-5.32	Peak
6015.00	38.85	---	10.84	49.70	---	74.00	54.00	-4.30	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1624.00	47.91	---	-1.73	46.18	---	74.00	54.00	-7.82	Peak
2278.00	57.83	44.11	2.37	60.20	46.48	74.00	54.00	-7.52	AVG
2486.00	54.00	40.83	2.78	56.78	43.61	74.00	54.00	-10.39	AVG
3255.00	44.92	---	4.29	49.21	---	74.00	54.00	-4.79	Peak
4860.00	48.80	34.23	8.15	56.95	42.38	74.00	54.00	-11.62	AVG
6255.00	39.19	---	11.55	50.74	---	74.00	54.00	-3.26	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless Router	Test By	Rex Chiu
Test Model	R-300NP	Test Date	2014/08/04
Test Mode	IEEE 802.11gn HT20 TX / CH High	Temp. & Humidity	28°C, 56%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1856.00	46.08	---	0.46	46.54	---	74.00	54.00	-7.46	Peak
2244.00	47.60	---	2.30	49.90	---	74.00	54.00	-4.10	Peak
2538.00	46.41	---	2.91	49.32	---	74.00	54.00	-4.68	Peak
4020.00	41.35	---	5.92	47.27	---	74.00	54.00	-6.73	Peak
4920.00	39.59	---	8.28	47.87	---	74.00	54.00	-6.13	Peak
5505.00	40.49	---	9.32	49.81	---	74.00	54.00	-4.19	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1642.00	47.90	---	-1.56	46.34	---	74.00	54.00	-7.66	Peak
2290.00	58.42	44.71	2.39	60.81	47.10	74.00	54.00	-6.90	AVG
2562.00	54.02	41.00	2.97	56.99	43.97	74.00	54.00	-10.03	AVG
3285.00	44.63	---	4.31	48.94	---	74.00	54.00	-5.06	Peak
4920.00	42.71	---	8.28	50.98	---	74.00	54.00	-3.02	Peak
5775.00	39.39	---	10.13	49.52	---	74.00	54.00	-4.48	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless Router	Test By	Rex Chiu
Test Model	R-300NP	Test Date	2014/08/04
Test Mode	IEEE 802.11gn HT40 TX / CH Low	Temp. & Humidity	28°C, 54%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2094.00	45.50	---	2.01	47.51	---	74.00	54.00	-6.49	Peak
2234.00	45.82	---	2.28	48.10	---	74.00	54.00	-5.90	Peak
2558.00	45.55	---	2.96	48.51	---	74.00	54.00	-5.49	Peak
3990.00	41.68	---	5.83	47.51	---	74.00	54.00	-6.49	Peak
4845.00	39.68	---	8.12	47.81	---	74.00	54.00	-6.19	Peak
5655.00	39.84	---	9.77	49.61	---	74.00	54.00	-4.39	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1918.00	45.50	---	1.05	46.55	---	74.00	54.00	-7.45	Peak
2298.00	53.66	41.23	2.41	56.07	43.64	74.00	54.00	-10.36	AVG
2524.00	50.27	38.06	2.87	53.14	40.93	74.00	54.00	-13.07	AVG
3225.00	44.78	---	4.26	49.04	---	74.00	54.00	-4.96	Peak
4845.00	38.76	---	8.12	46.88	---	74.00	54.00	-7.12	Peak
5670.00	39.48	---	9.82	49.30	---	74.00	54.00	-4.70	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless Router	Test By	Rex Chiu
Test Model	R-300NP	Test Date	2014/08/04
Test Mode	IEEE 802.11gn HT40 TX / CH Middle	Temp. & Humidity	28°C, 54%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2268.00	47.94	---	2.35	50.29	---	74.00	54.00	-3.71	Peak
2390.00	51.30	46.22	2.59	53.90	48.81	74.00	54.00	-5.19	AVG
2484.00	51.26	45.78	2.78	54.04	48.56	74.00	54.00	-5.44	AVG
3840.00	42.17	---	5.42	47.59	---	74.00	54.00	-6.41	Peak
4875.00	38.59	---	8.18	46.77	---	74.00	54.00	-7.23	Peak
6030.00	38.66	---	10.89	49.55	---	74.00	54.00	-4.45	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1624.00	46.47	---	-1.73	44.74	---	74.00	54.00	-9.26	Peak
2390.00	65.83	50.76	2.59	68.42	53.35	74.00	54.00	-0.65	AVG
2484.00	65.05	49.48	2.78	67.83	52.26	74.00	54.00	-1.74	AVG
3255.00	45.32	---	4.29	49.61	---	74.00	54.00	-4.39	Peak
4875.00	41.71	---	8.18	49.89	---	74.00	54.00	-4.11	Peak
5805.00	39.33	---	10.22	49.55	---	74.00	54.00	-4.45	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless Router	Test By	Rex Chiu
Test Model	R-300NP	Test Date	2014/08/04
Test Mode	IEEE 802.11gn HT40 TX / CH High	Temp. & Humidity	28°C, 54%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2106.00	45.23	---	2.03	47.26	---	74.00	54.00	-6.74	Peak
2276.00	45.21	---	2.37	47.58	---	74.00	54.00	-6.42	Peak
2500.00	50.22	37.46	2.81	53.03	40.27	74.00	54.00	-13.73	AVG
3600.00	41.62	---	4.76	46.38	---	74.00	54.00	-7.62	Peak
4905.00	39.69	---	8.24	47.94	---	74.00	54.00	-6.06	Peak
6135.00	39.50	---	11.20	50.69	---	74.00	54.00	-3.31	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2040.00	45.73	---	1.90	47.63	---	74.00	54.00	-6.37	Peak
2282.00	51.74	38.65	2.38	54.12	41.03	74.00	54.00	-12.97	AVG
2500.00	59.35	47.12	2.81	62.16	49.93	74.00	54.00	-4.07	AVG
3270.00	43.98	---	4.30	48.29	---	74.00	54.00	-5.71	Peak
4905.00	39.98	---	8.24	48.23	---	74.00	54.00	-5.77	Peak
6030.00	38.95	---	10.89	49.84	---	74.00	54.00	-4.16	Peak

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Restricted Band Edges


Detector Mode : Peak

Polarity : Horizontal

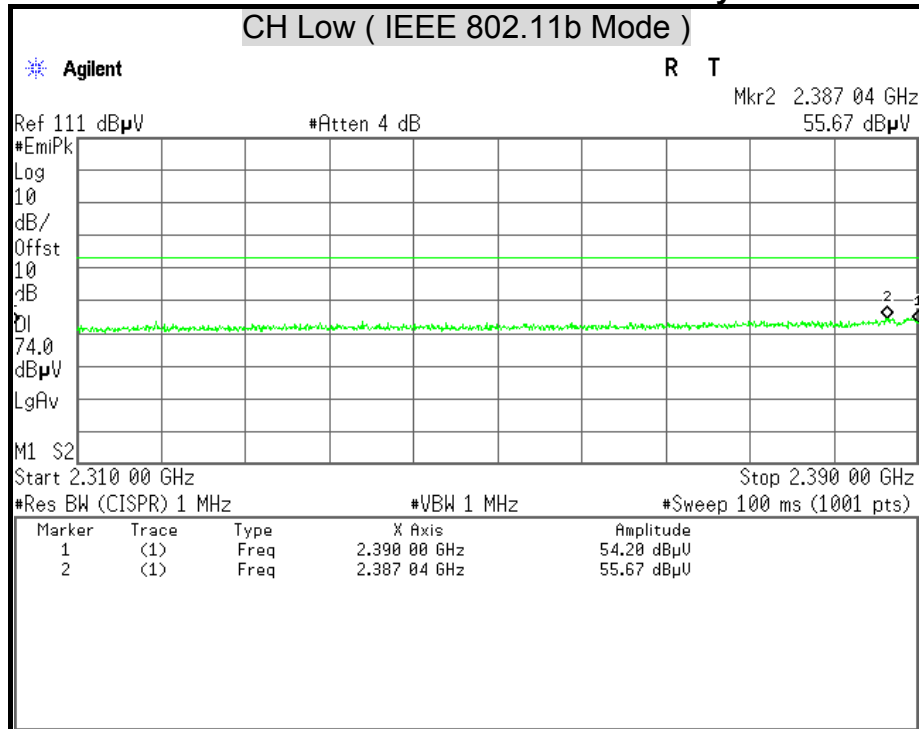

Detector Mode : Average


Polarity : Horizontal

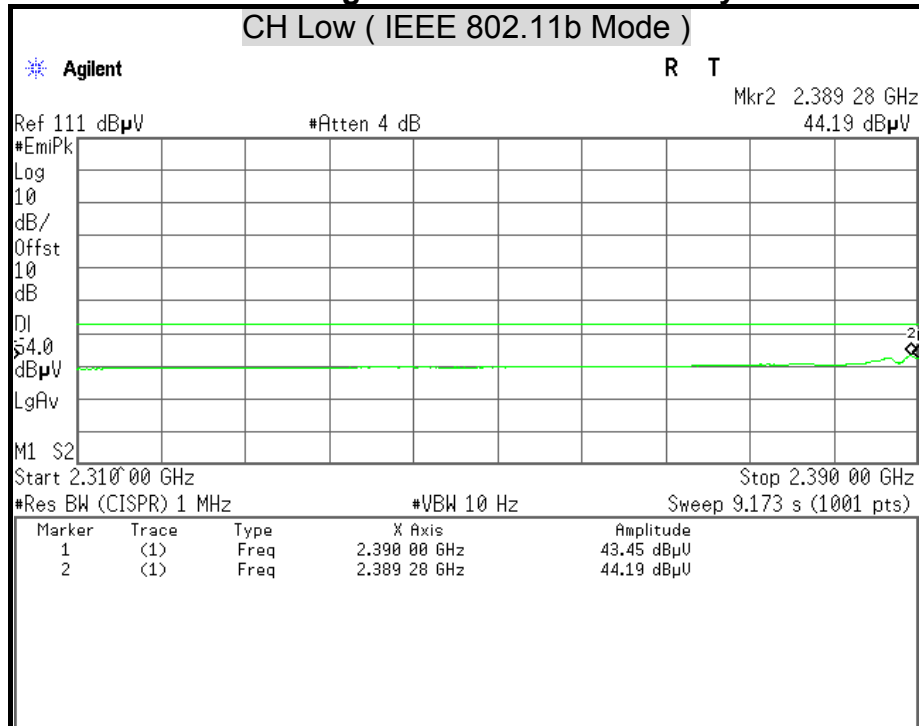




Detector Mode : Peak

Polarity : Vertical

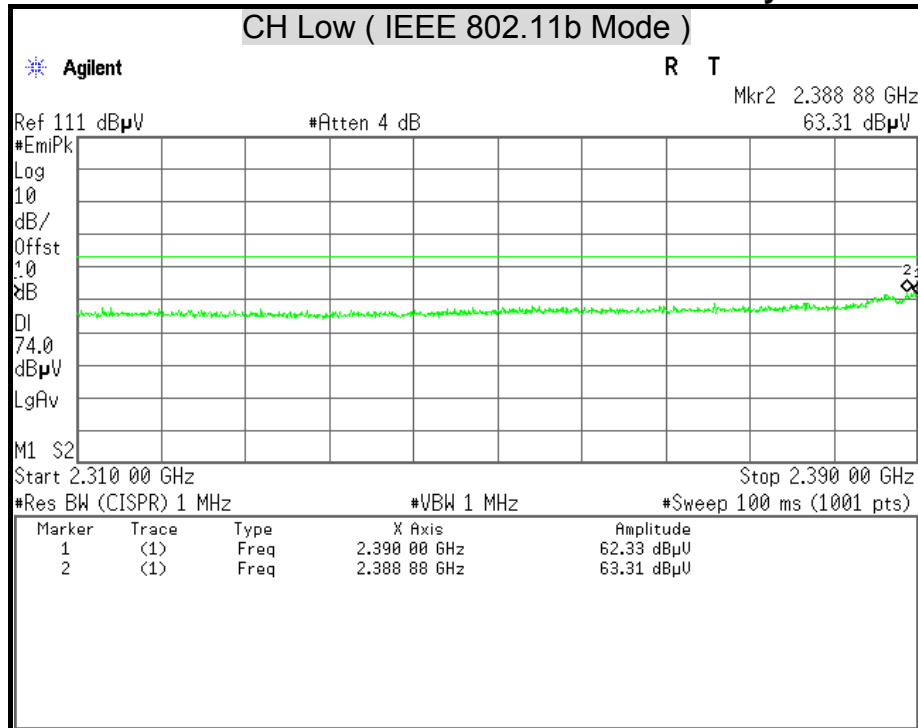

Detector Mode : Average


Polarity : Vertical

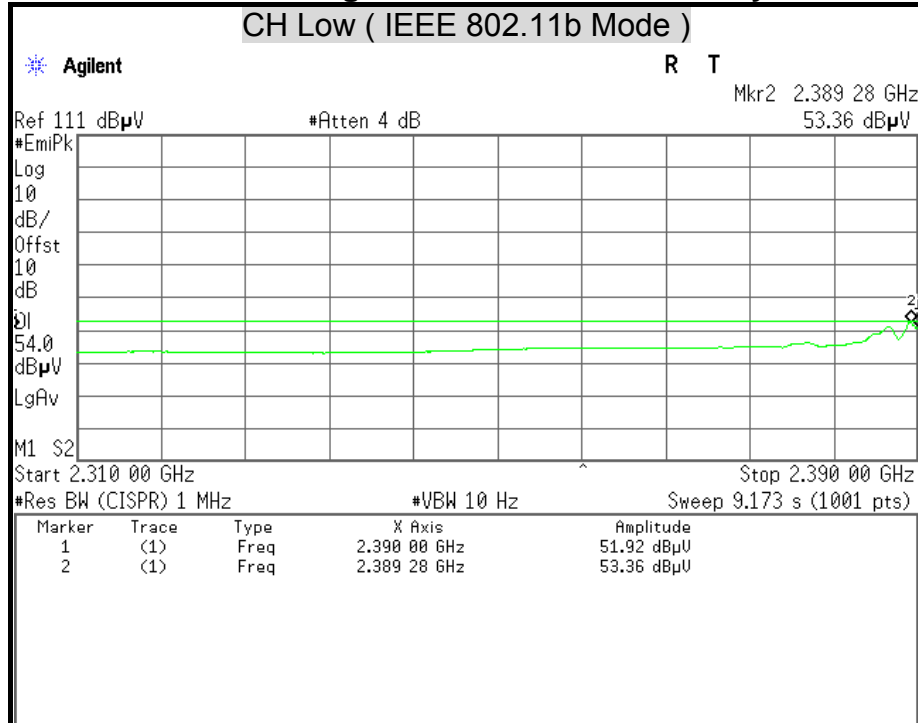




Detector Mode : Peak

Polarity : Horizontal

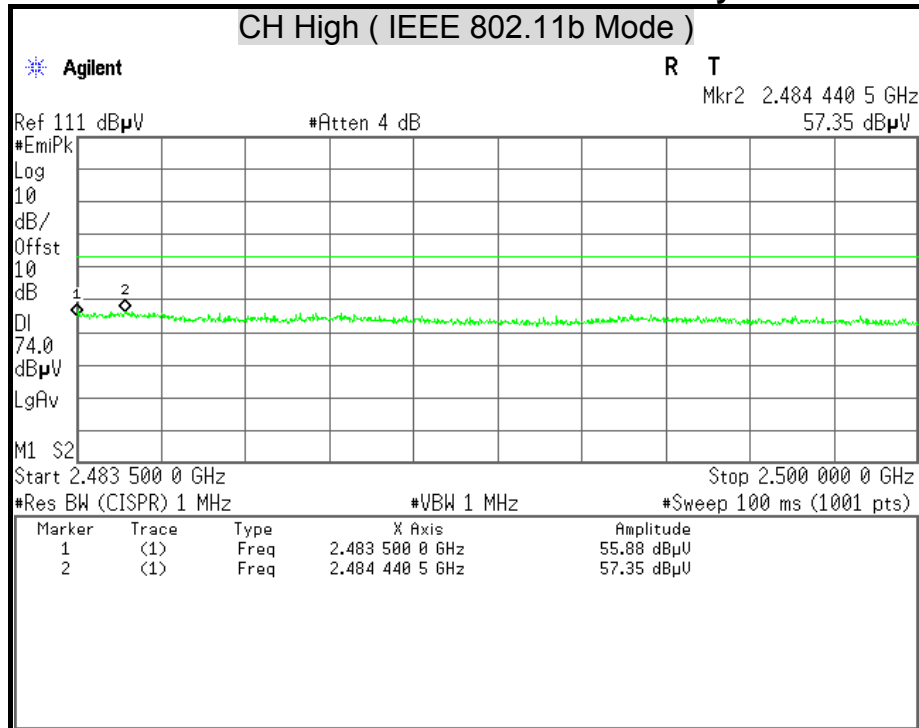

Detector Mode : Average


Polarity : Horizontal

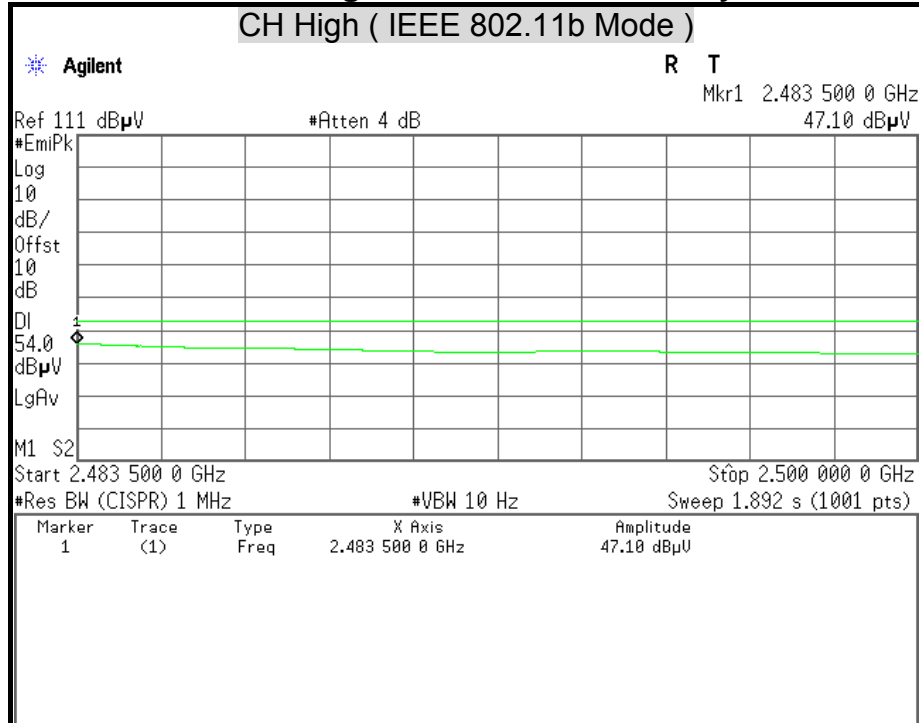




Detector Mode : Peak

Polarity : Vertical

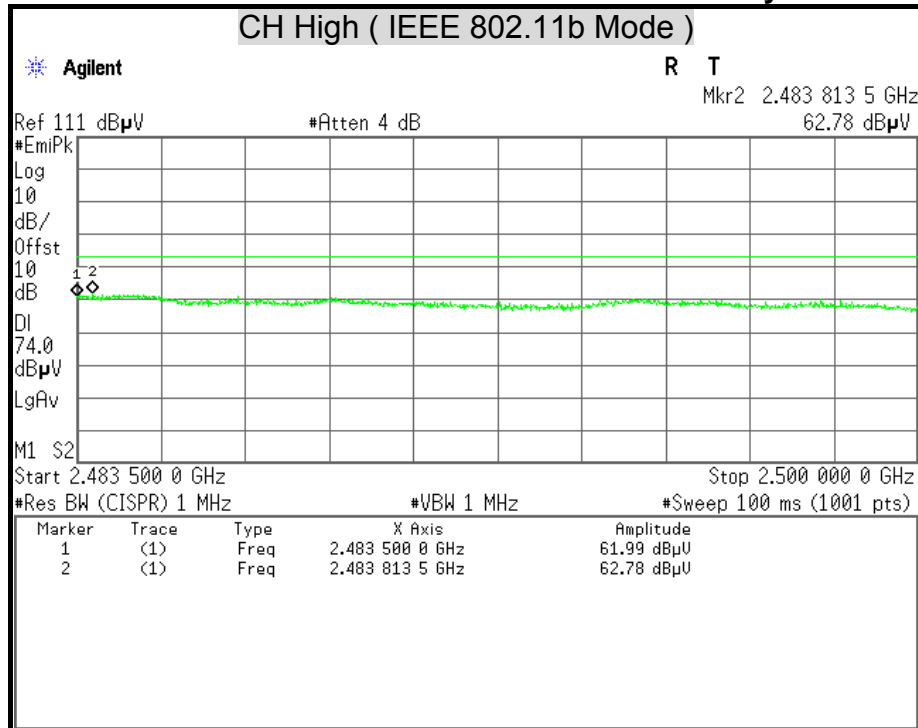

Detector Mode : Average


Polarity : Vertical

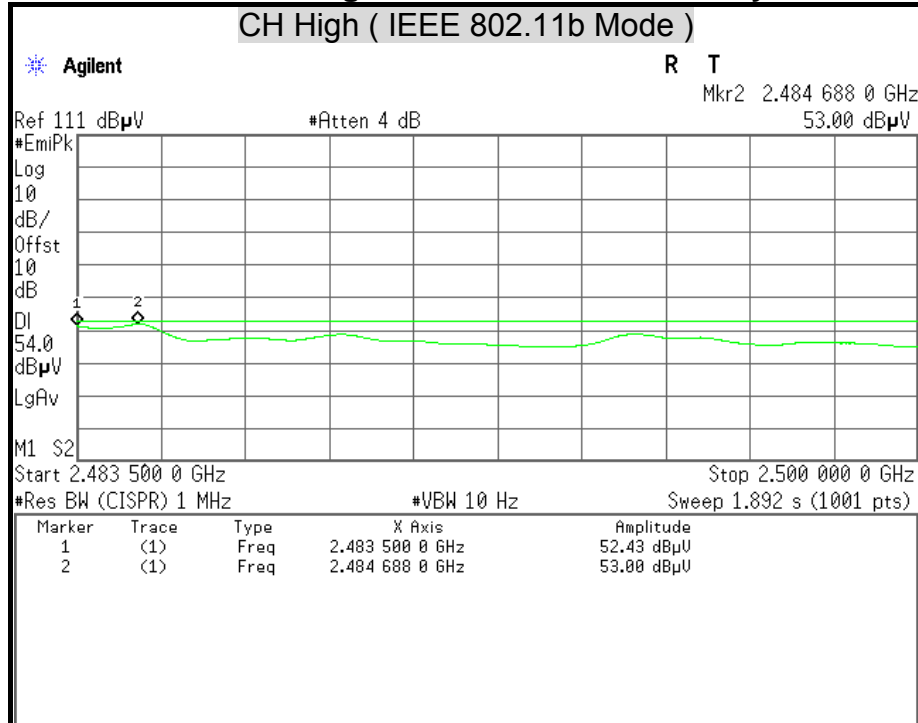




Detector Mode : Peak

Polarity : Horizontal

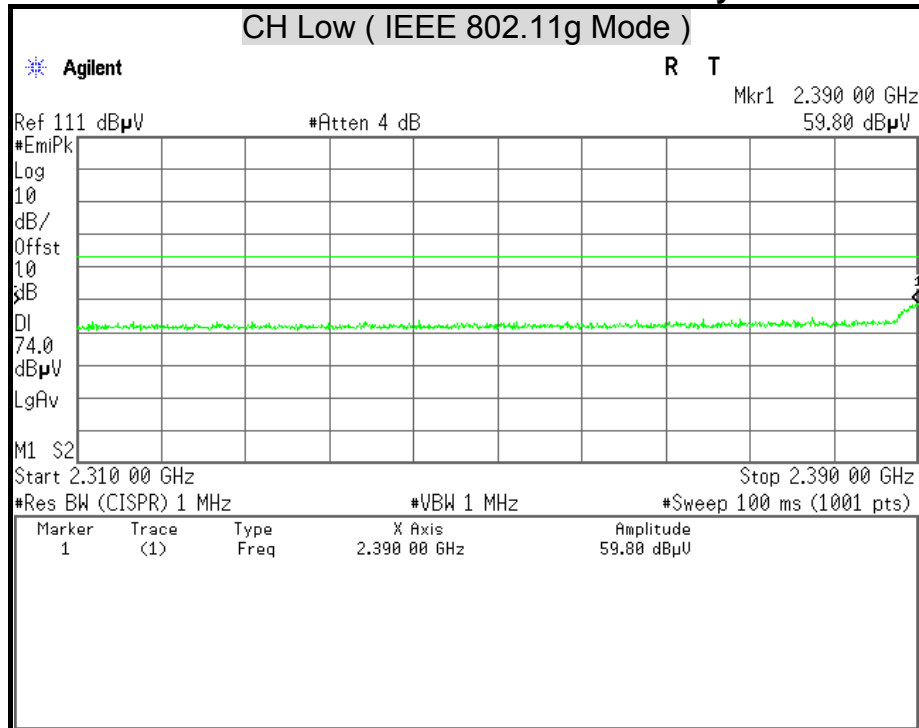

Detector Mode : Average


Polarity : Horizontal

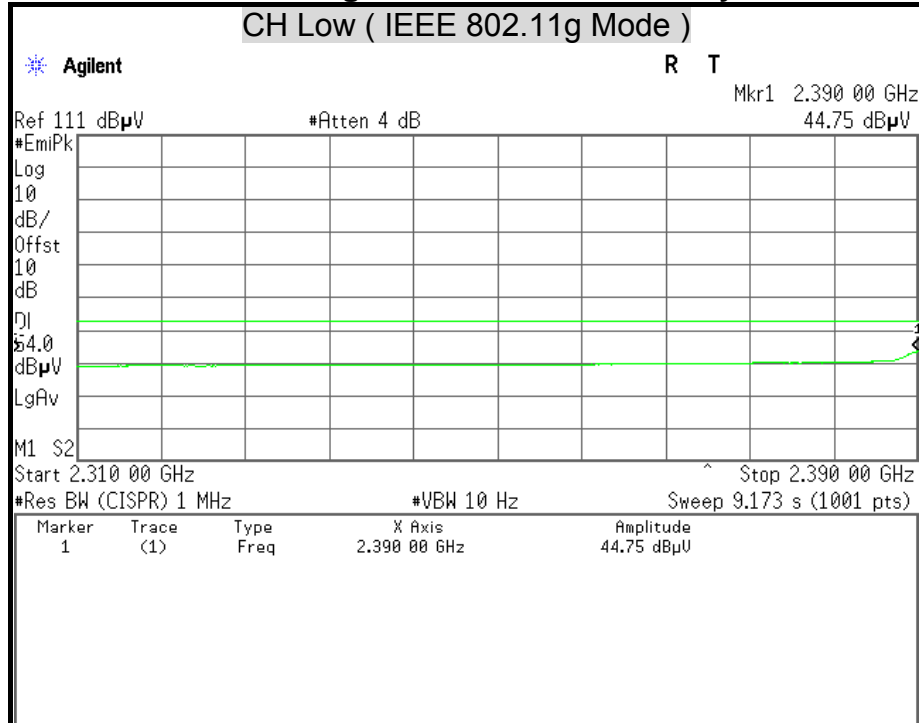




Detector Mode : Peak

Polarity : Vertical

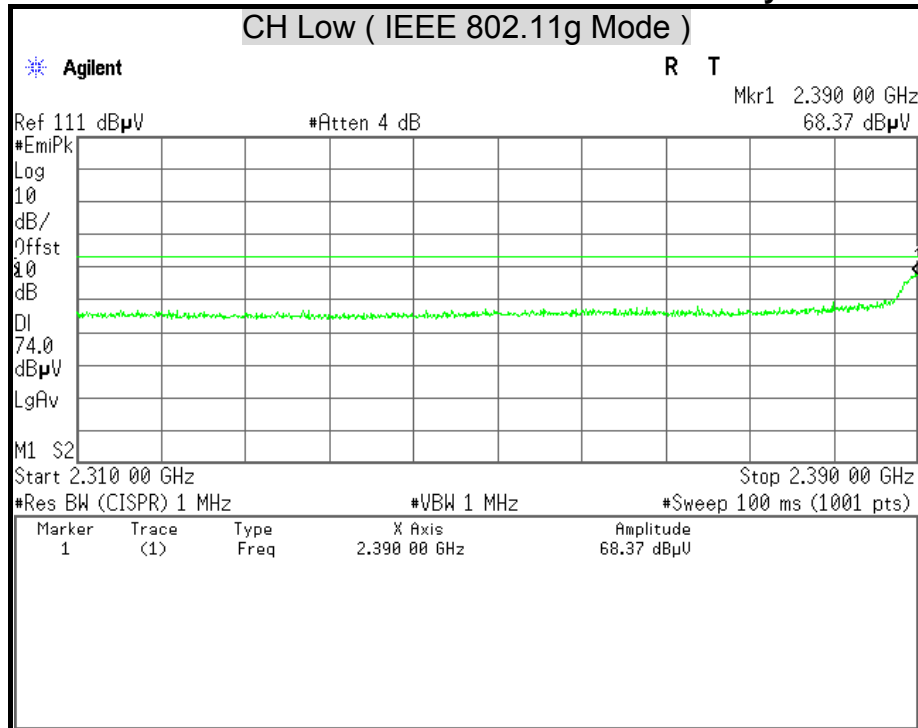

Detector Mode : Average


Polarity : Vertical

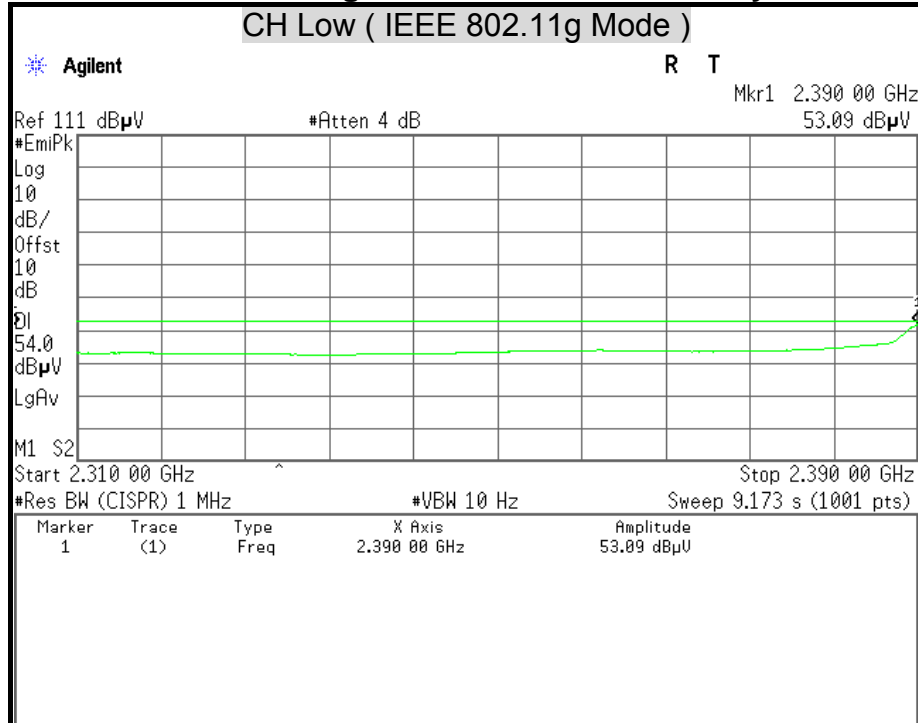




Detector Mode : Peak

Polarity : Horizontal

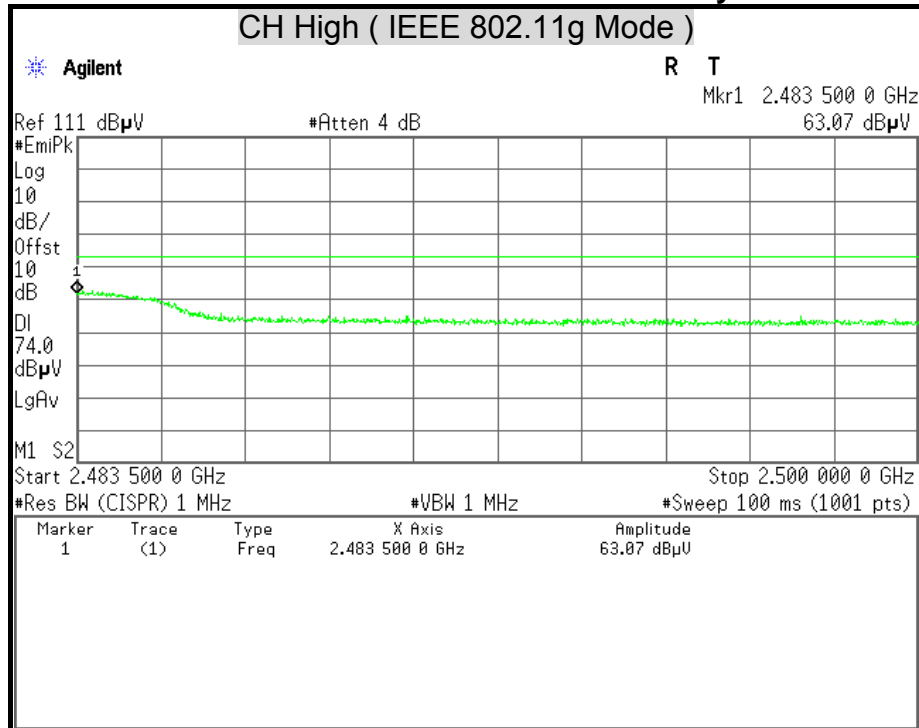

Detector Mode : Average


Polarity : Horizontal

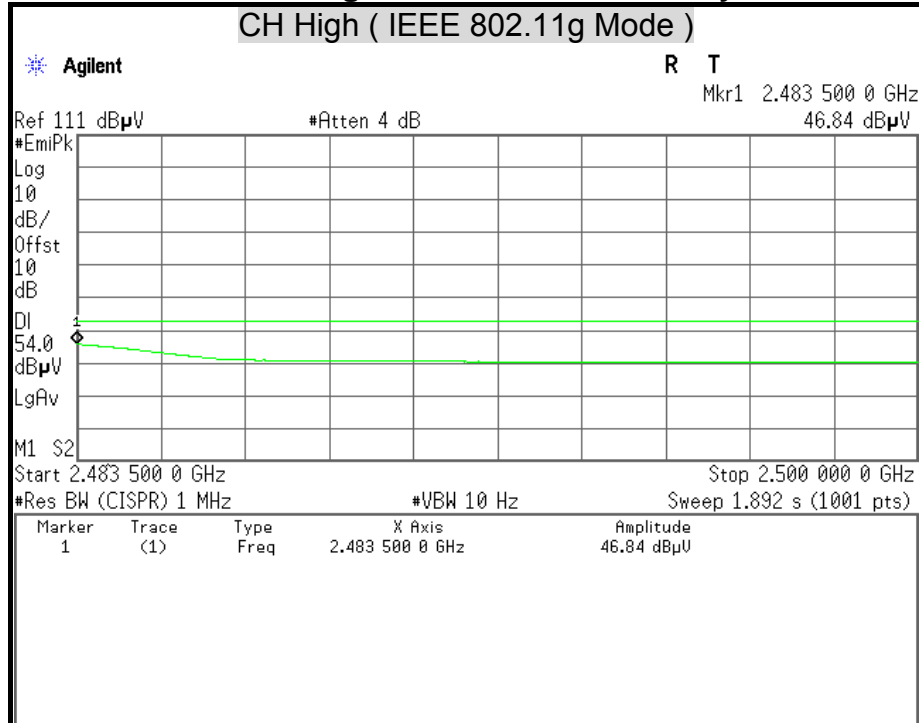




Detector Mode : Peak

Polarity : Vertical

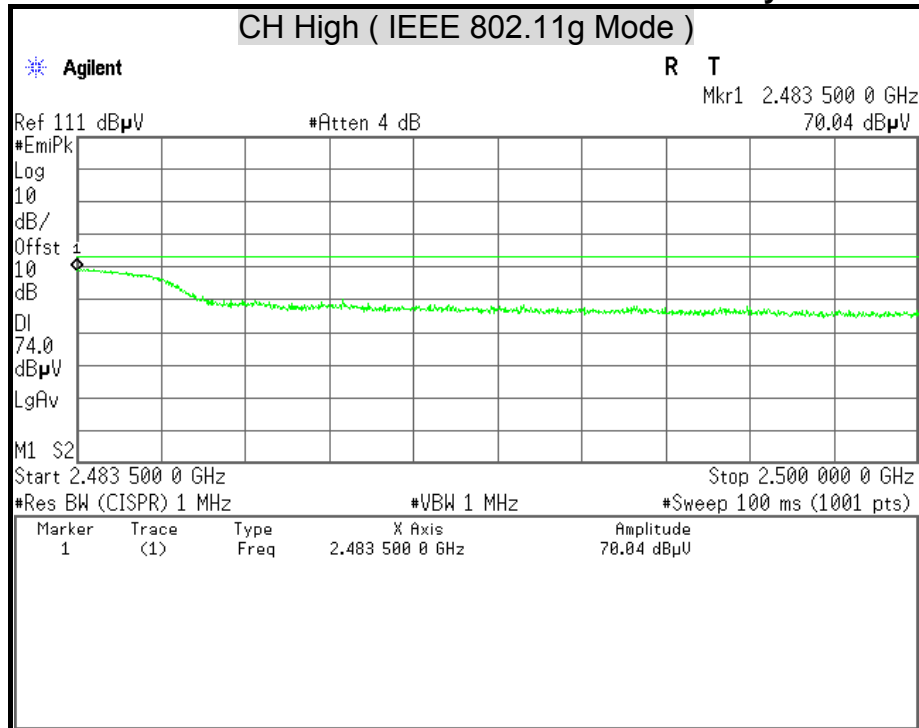

Detector Mode : Average


Polarity : Vertical

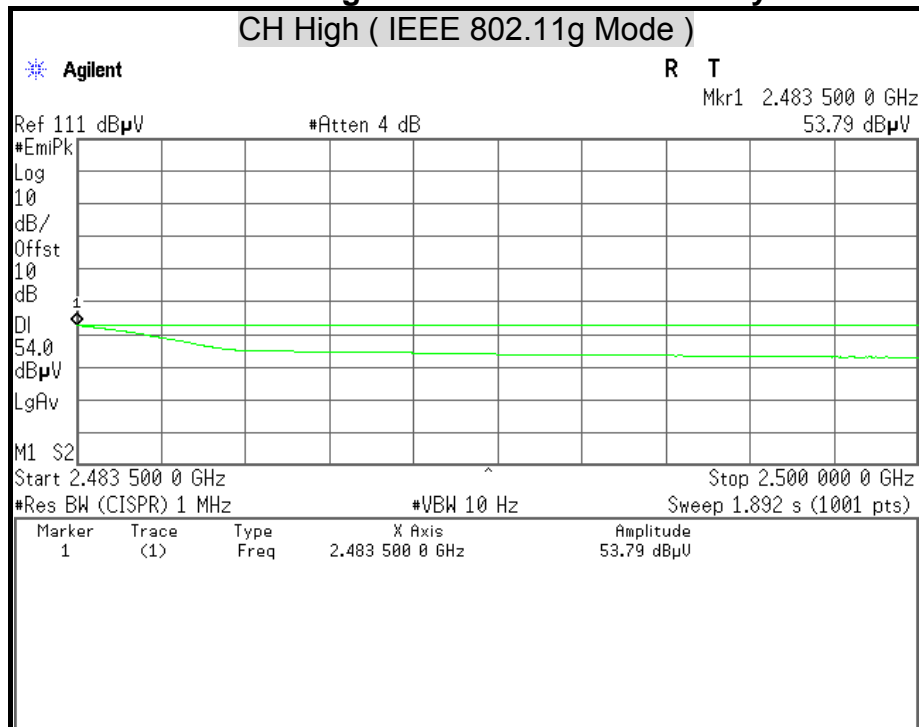




Detector Mode : Peak

Polarity : Horizontal

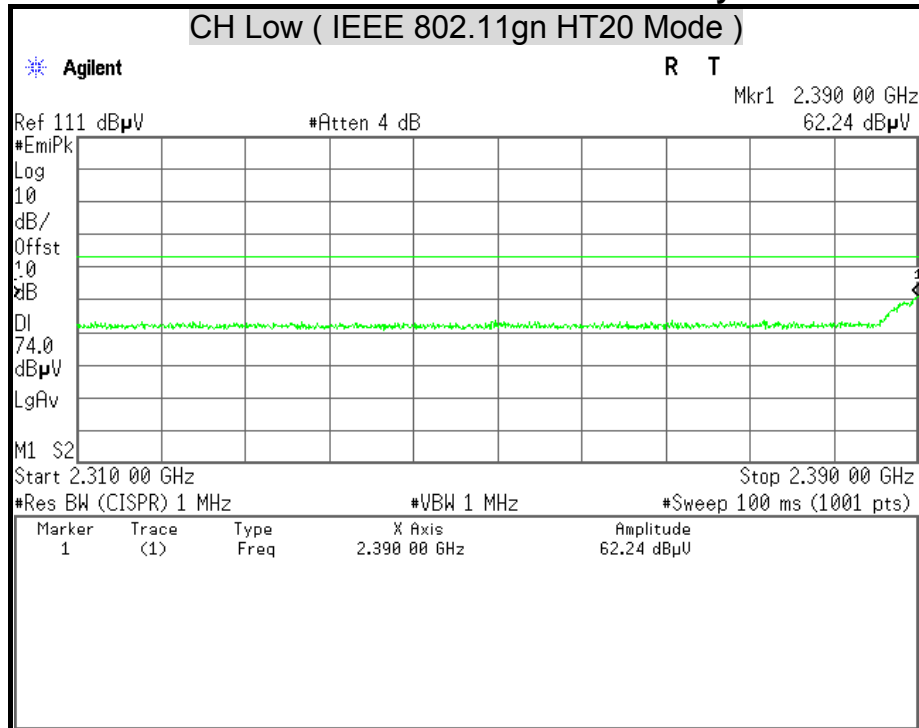

Detector Mode : Average


Polarity : Horizontal

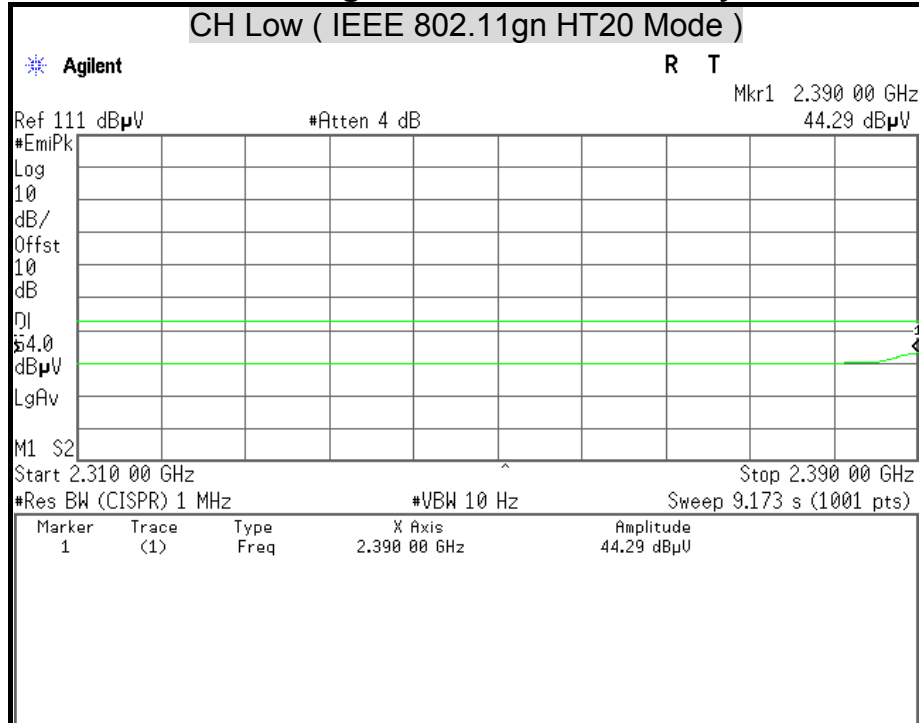




Detector Mode : Peak

Polarity : Vertical

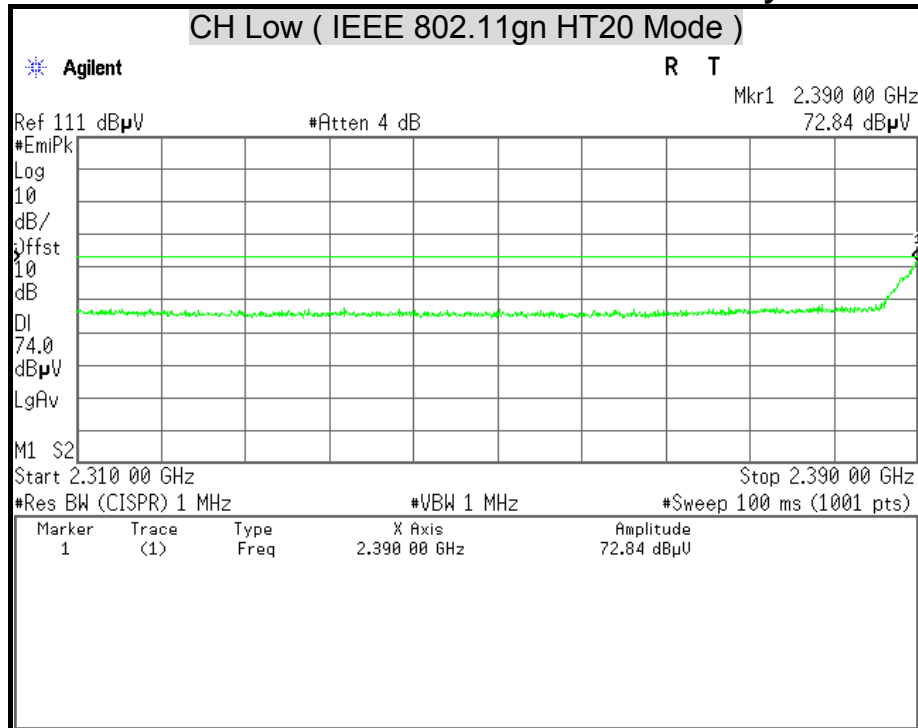

Detector Mode : Average


Polarity : Vertical

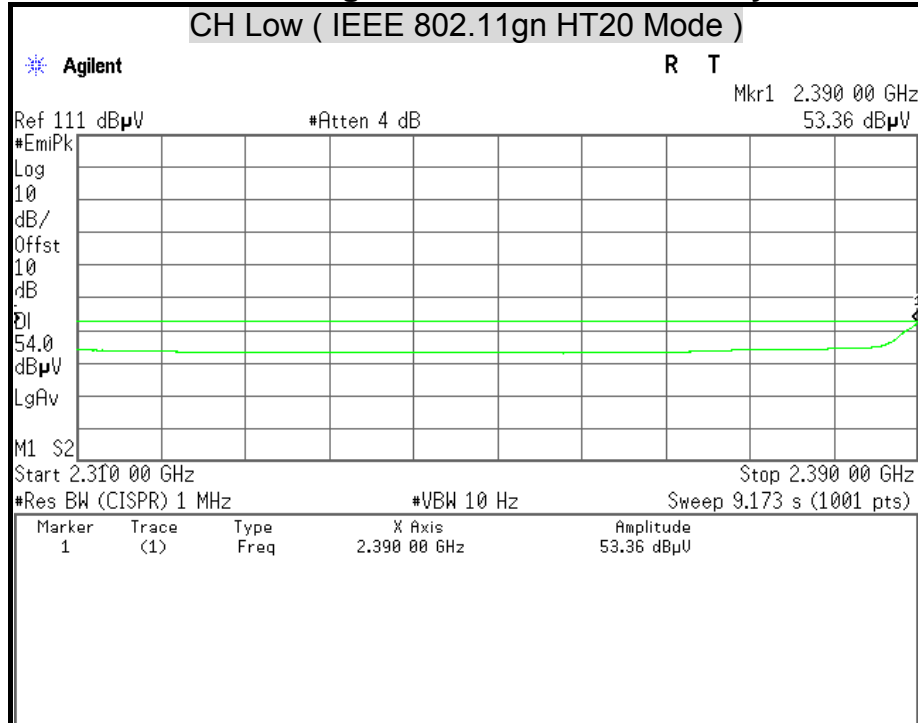




Detector Mode : Peak

Polarity : Horizontal

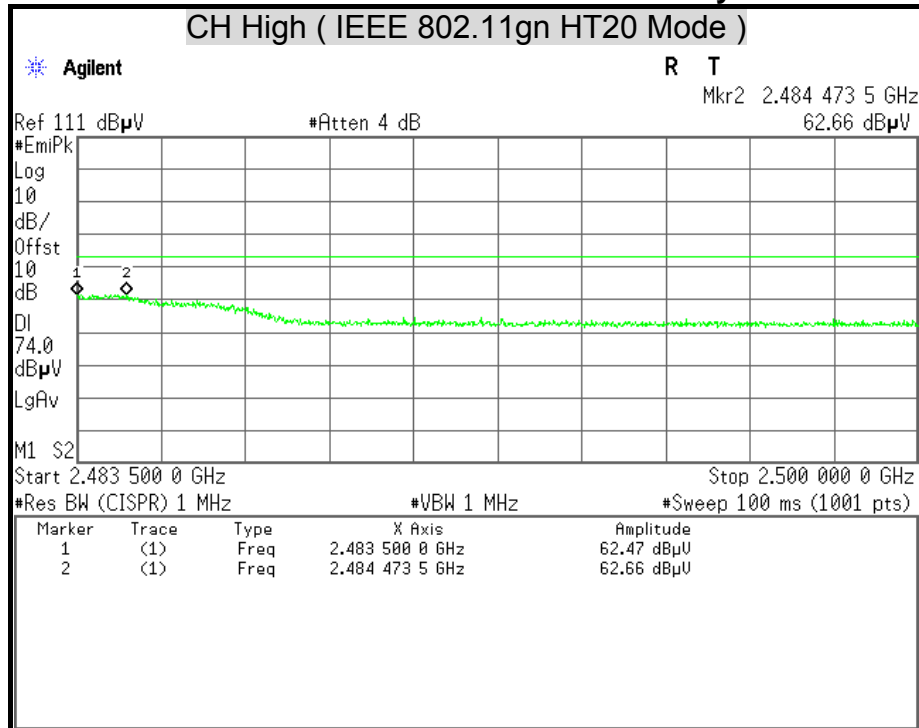

Detector Mode : Average


Polarity : Horizontal

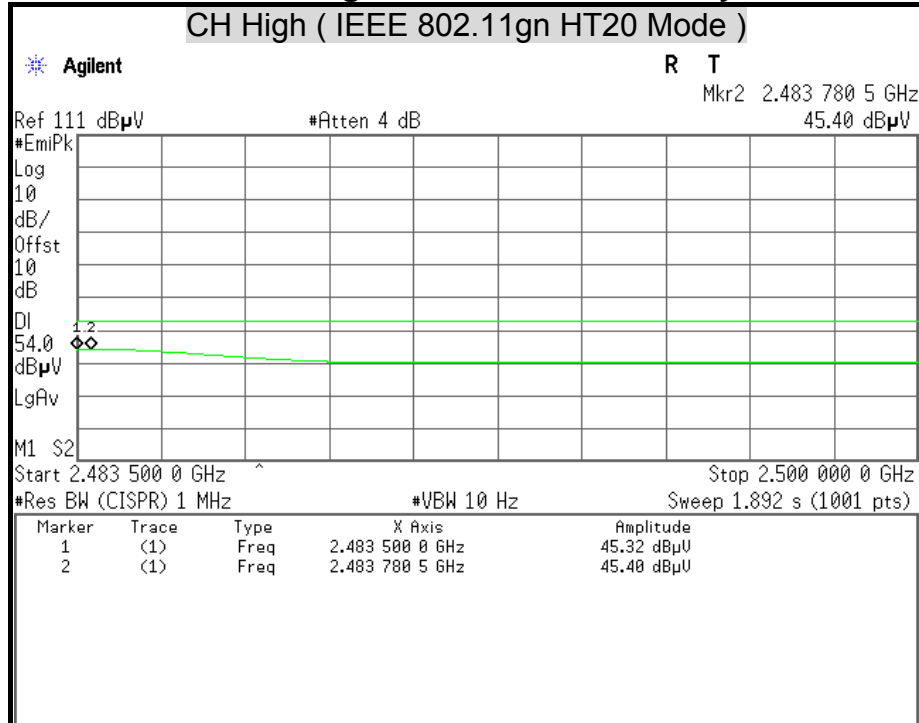




Detector Mode : Peak

Polarity : Vertical

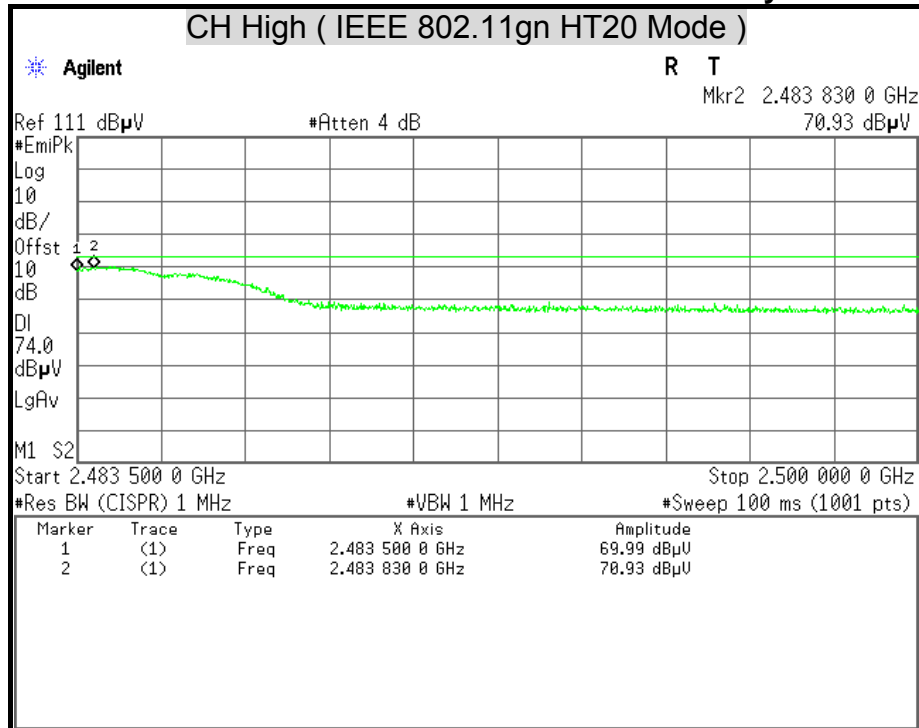

Detector Mode : Average


Polarity : Vertical

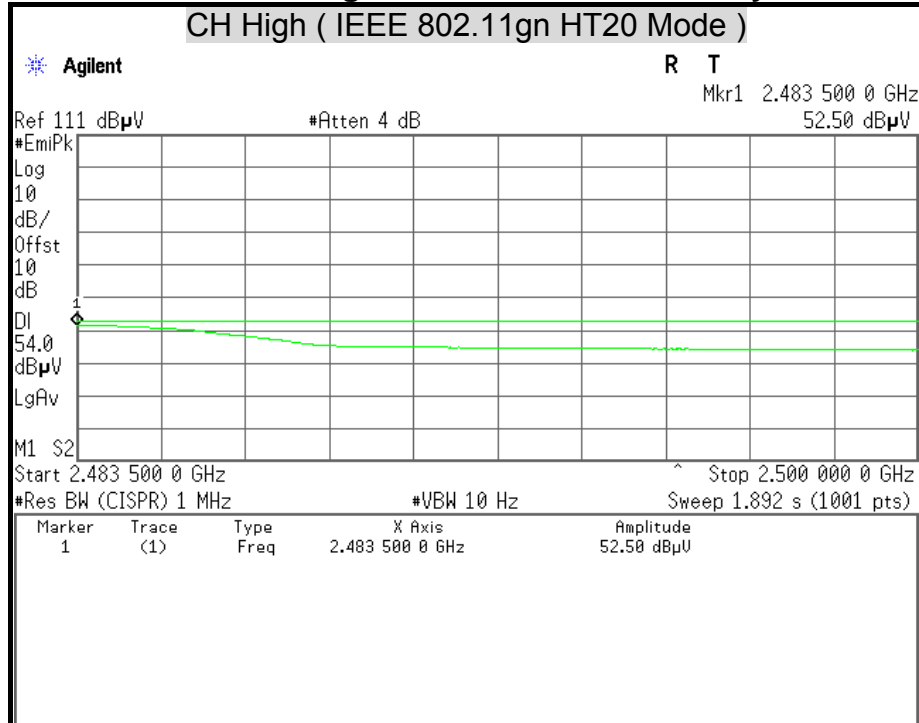




Detector Mode : Peak

Polarity : Horizontal

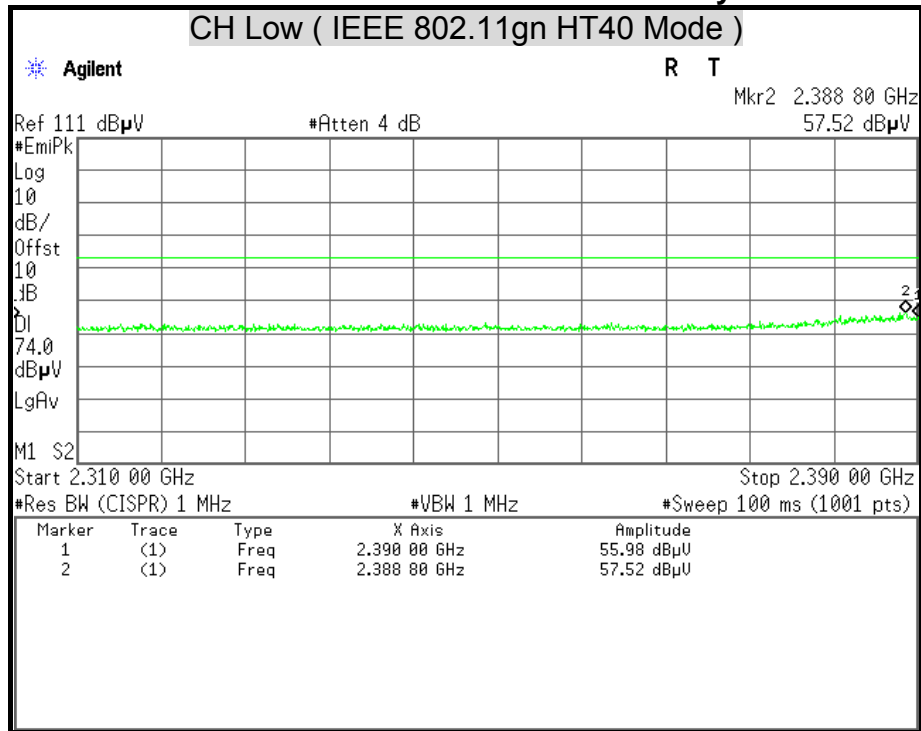

Detector Mode : Average


Polarity : Horizontal

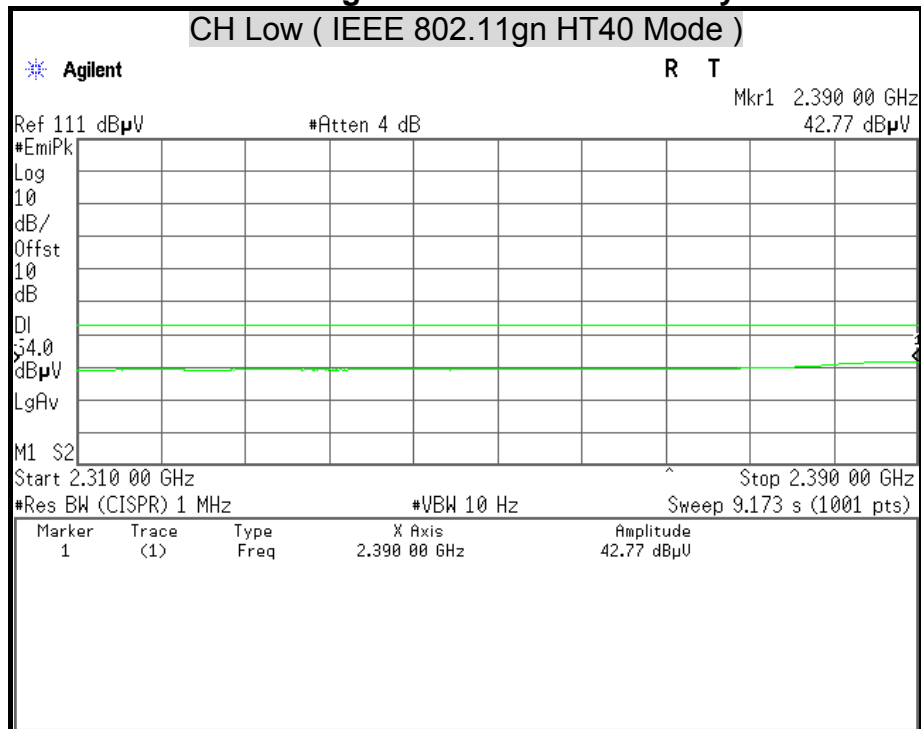




Detector Mode : Peak

Polarity : Vertical

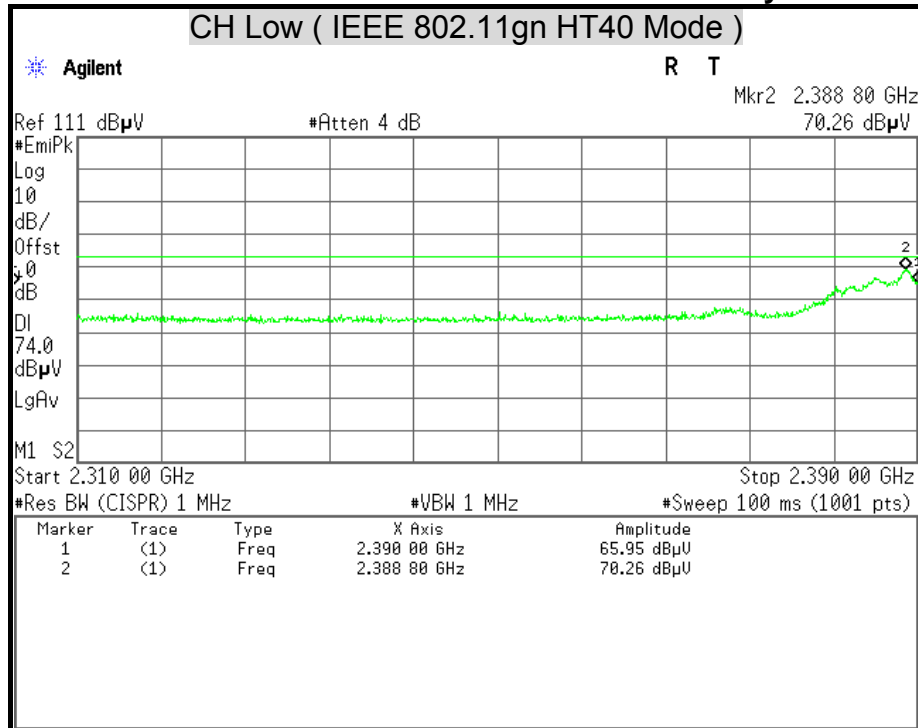

Detector Mode : Average


Polarity : Vertical

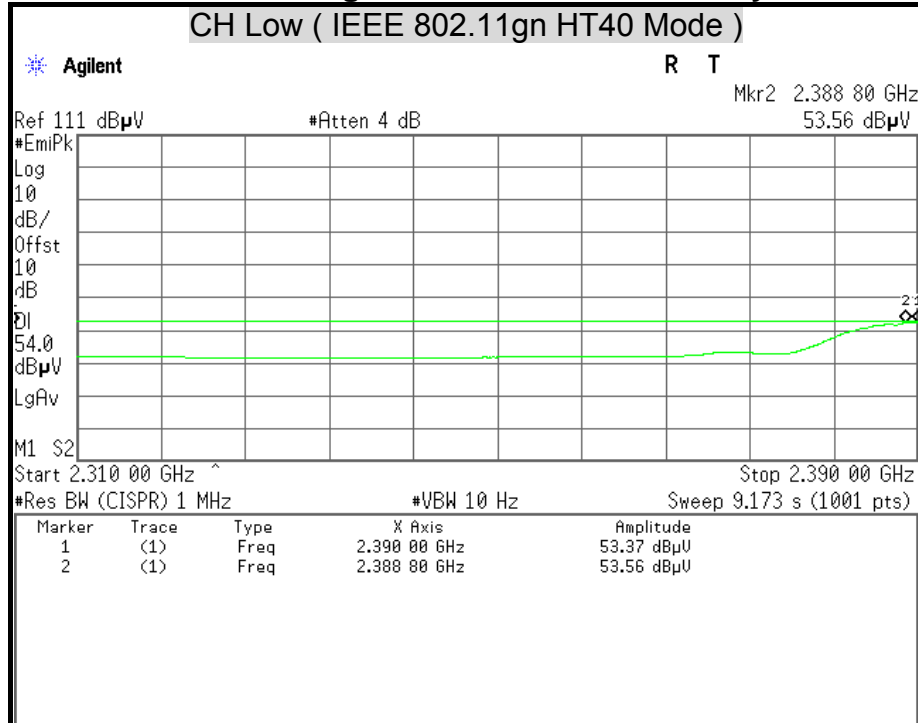




Detector Mode : Peak

Polarity : Horizontal

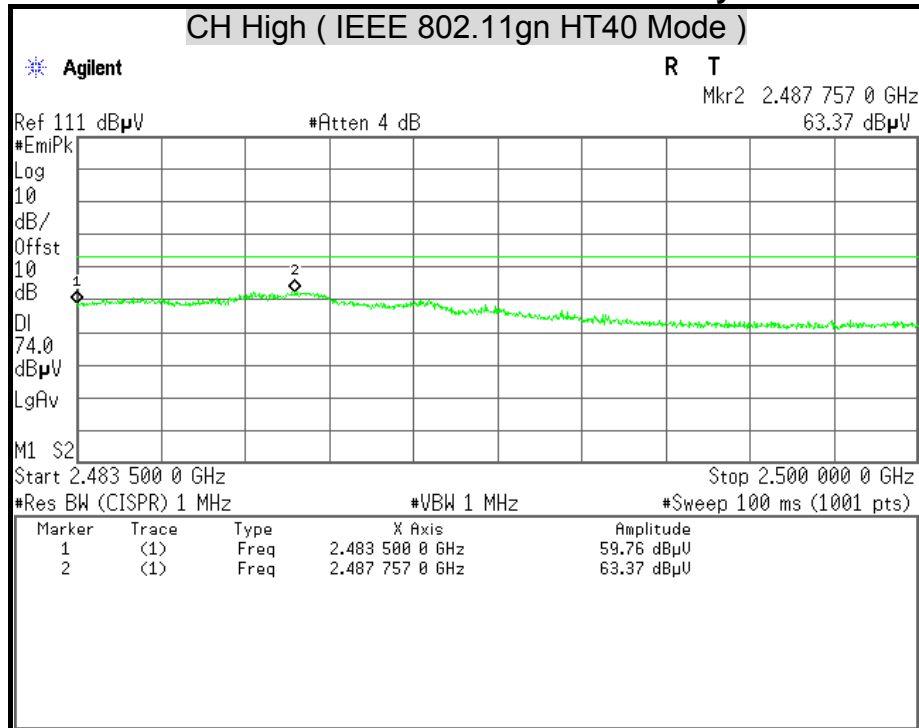

Detector Mode : Average


Polarity : Horizontal

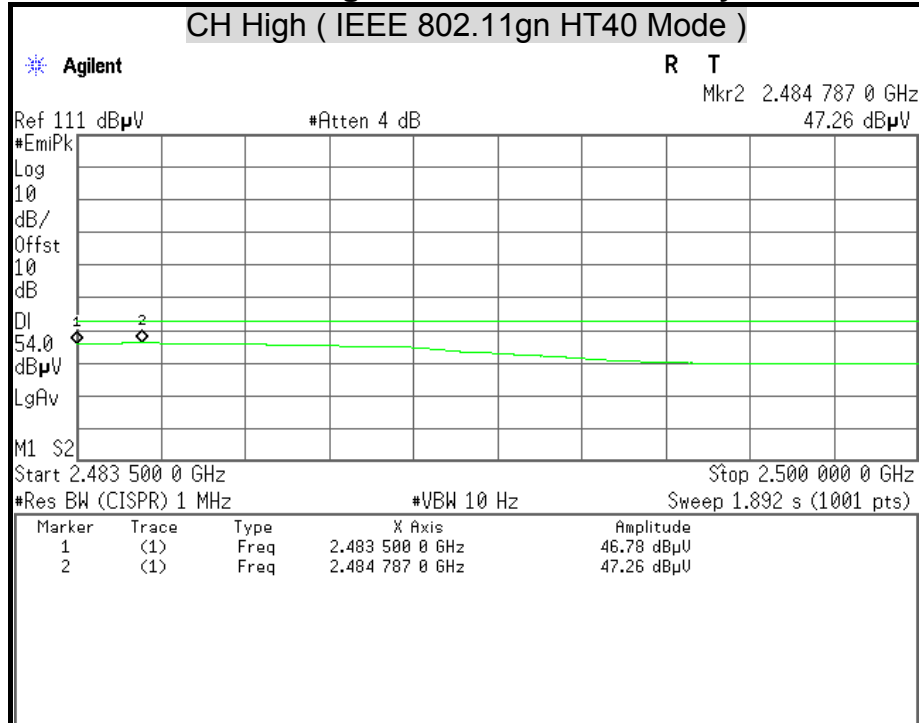




Detector Mode : Peak

Polarity : Vertical

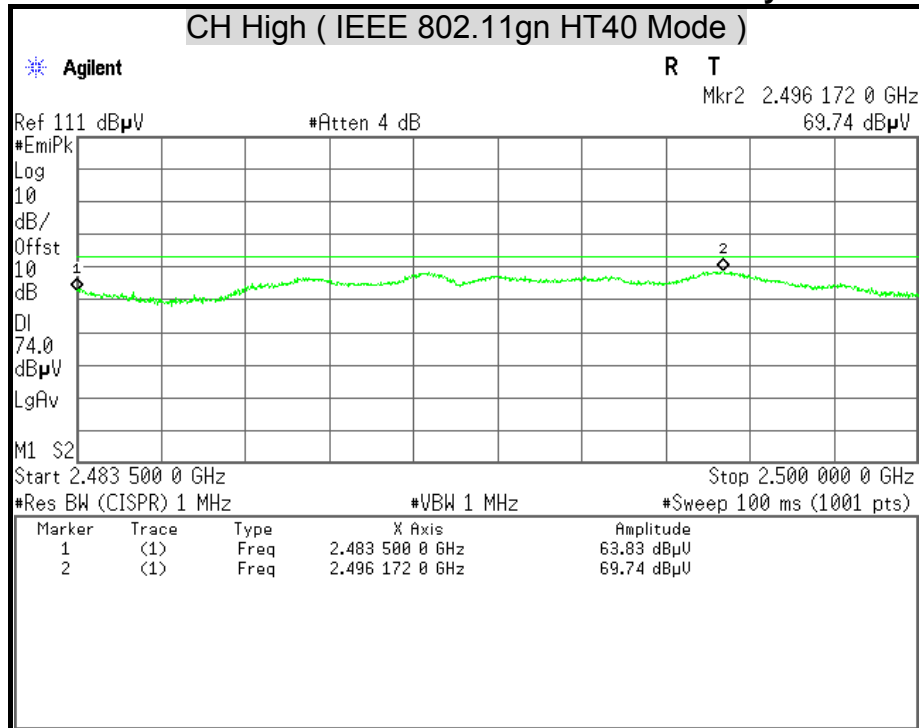

Detector Mode : Average

Polarity : Vertical

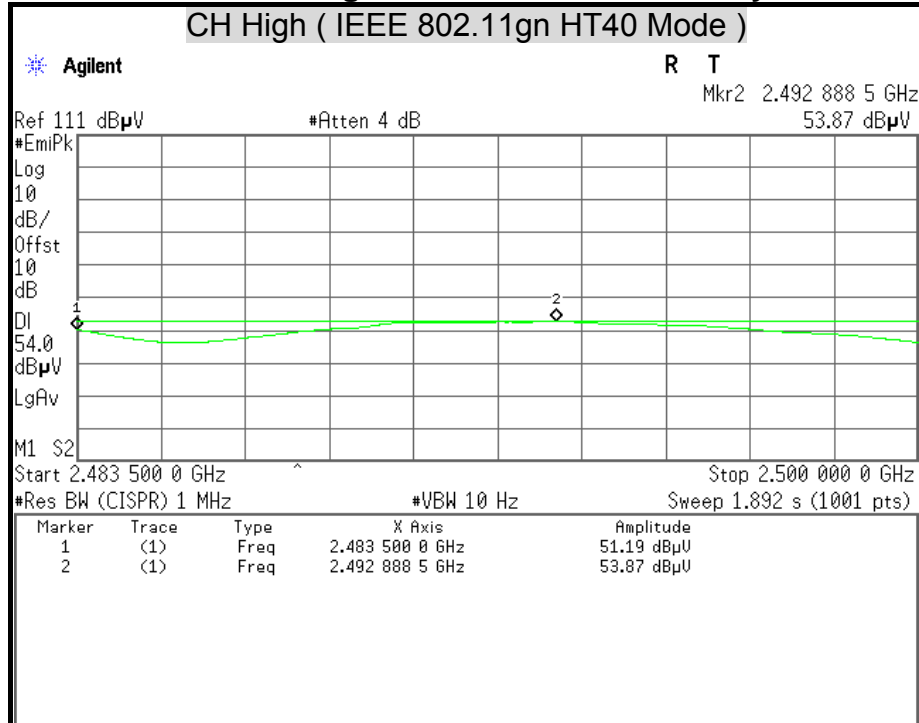



7.7 CONDUCTED EMISSION

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dB μ v)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5.00	56	46
5.00 - 30.0	60	50



TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-465	08/06/2015
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-473	03/10/2015
EMI Test Receiver	ROHDE & SCHWARZ	ESHS 30	838550/003	11/07/2014
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	100111	06/30/2015

Remark: Each piece of equipment is scheduled for calibration once a year.



TEST SETUP

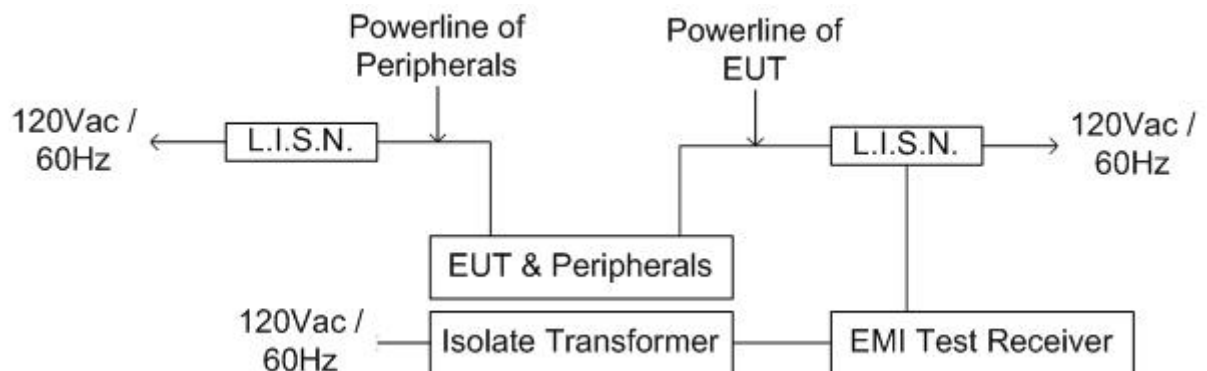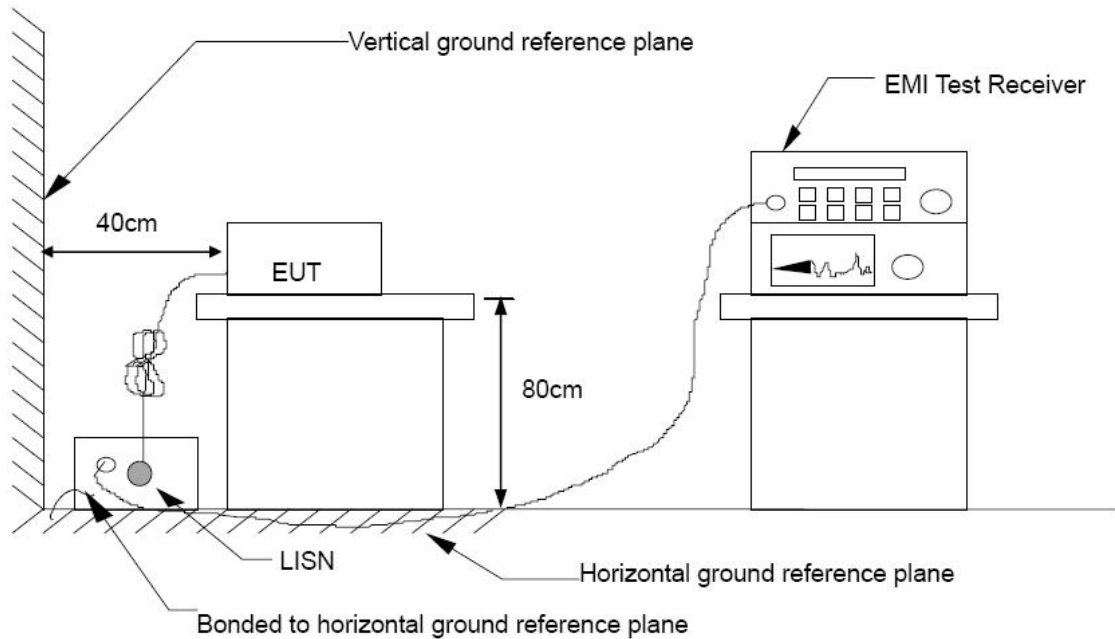



TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.10:2009.

The test procedure is performed in a 4m × 3m × 2.4m (L×W×H) shielded room.


The EUT along with its peripherals were placed on a 1.0m (W) × 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.

The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.

The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN is 0.8 m. Where a mains flexible cord was provided by the manufacturer shall be 1 m long, or if in excess of 1 m, the excess cable was folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

**TEST RESULTS**

Product Name	Wireless Router	Test By	Ted Wu
Test Model	R-300NP	Test Date	2014/07/29
Test Mode	Normal Operating / Power Adapter 1	Temp. & Humidity	21°C, 50%

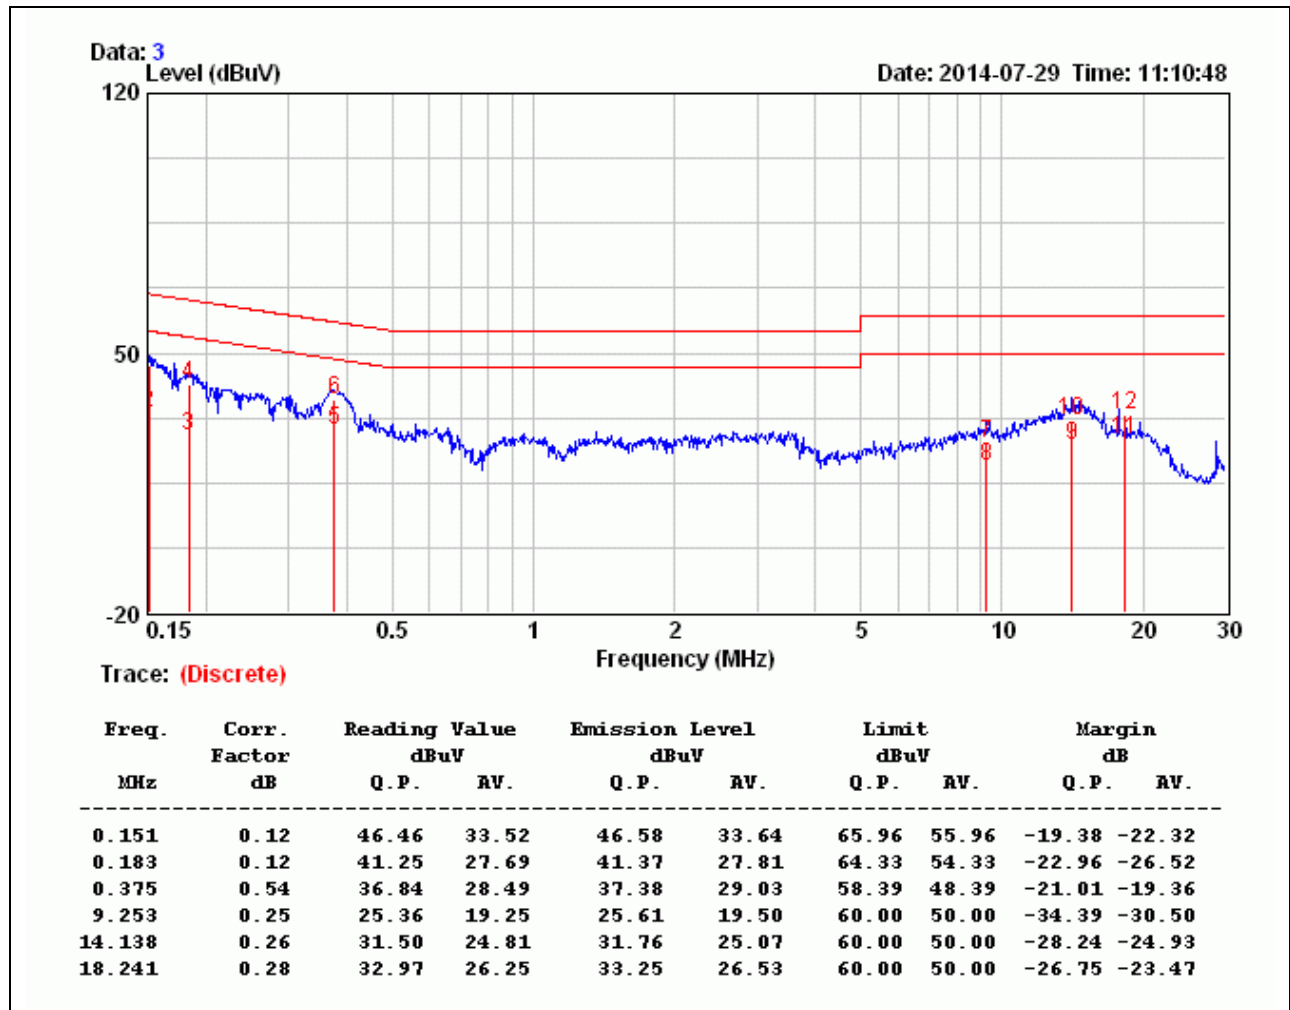
LINE**Remark:**

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value



Product Name	Wireless Router	Test By	Ted Wu
Test Model	R-300NP	Test Date	2014/07/29
Test Mode	Normal Operating / Power Adapter 1	Temp. & Humidity	21 °C, 50%

NEUTRAL

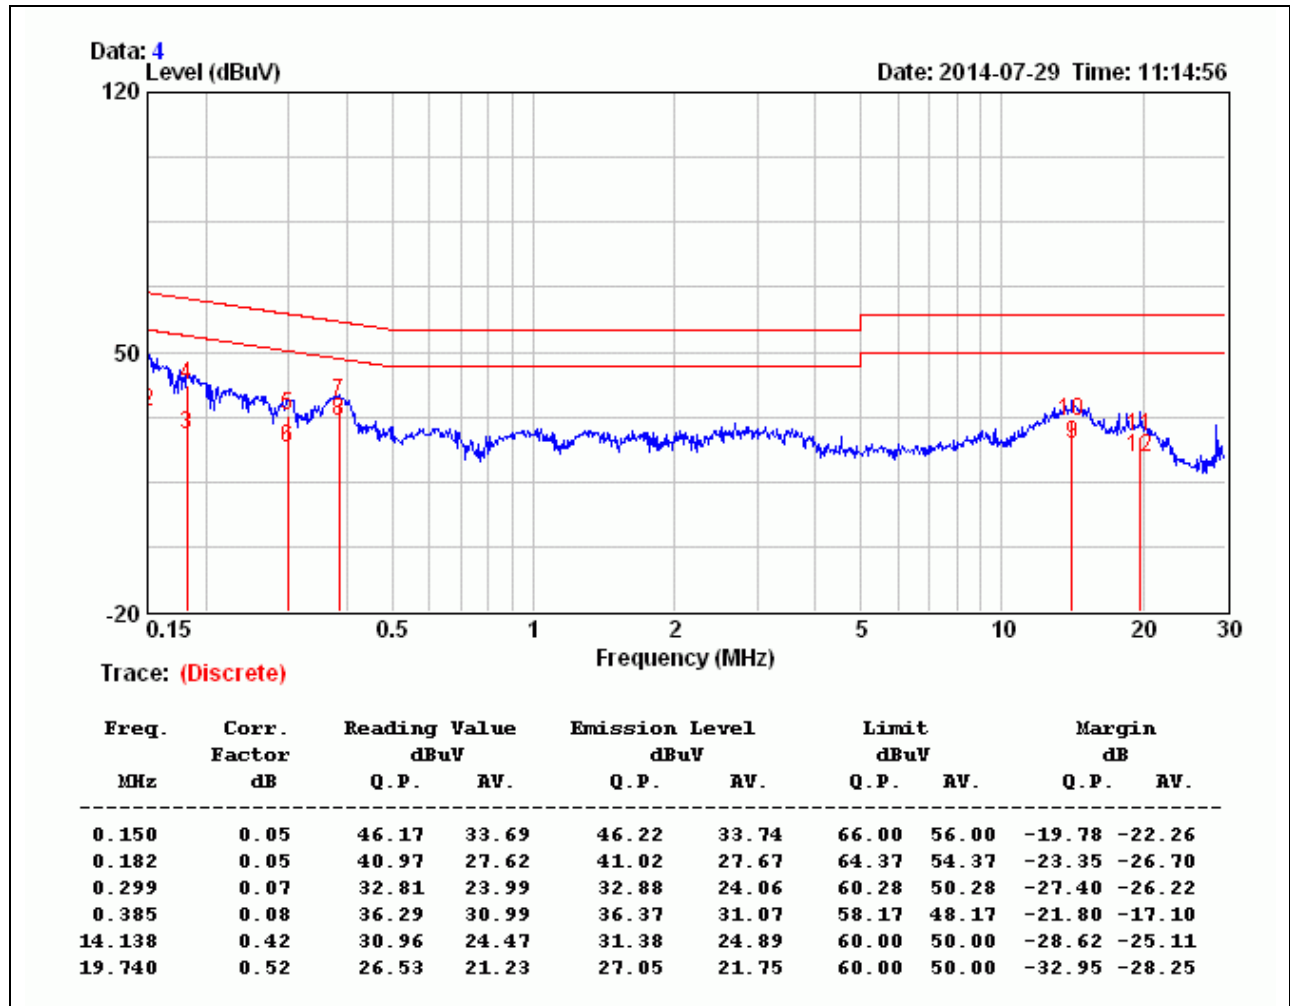


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value



Product Name	Wireless Router	Test By	Ted Wu
Test Model	R-300NP	Test Date	2014/07/29
Test Mode	Normal Operating / Power Adapter 2	Temp. & Humidity	21°C, 50%

LINE

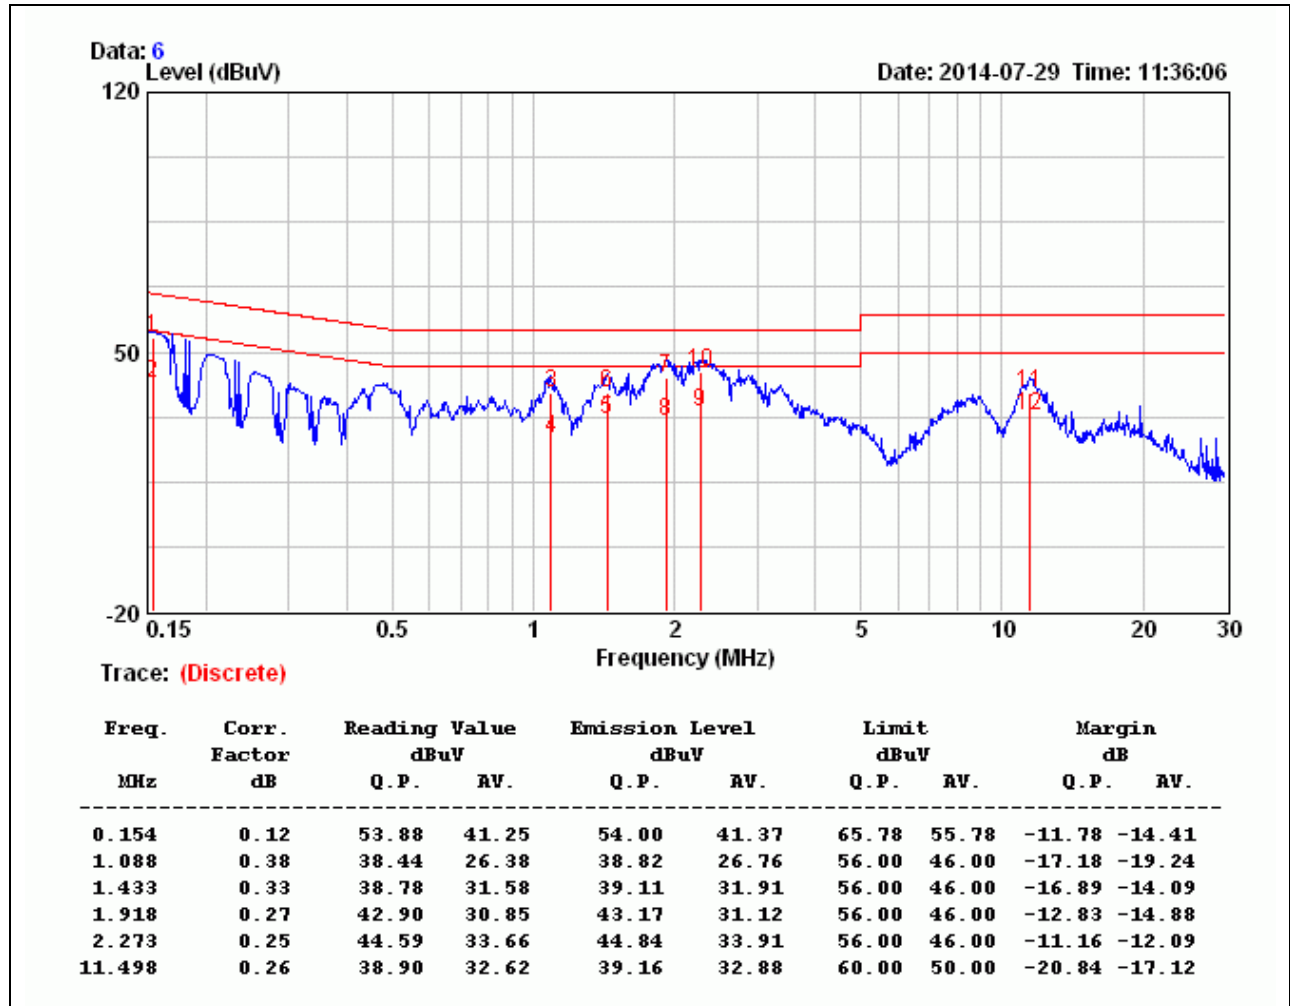


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value



Product Name	Wireless Router	Test By	Ted Wu
Test Model	R-300NP	Test Date	2014/07/29
Test Mode	Normal Operating / Power Adapter 2	Temp. & Humidity	21 °C, 50%

NEUTRAL

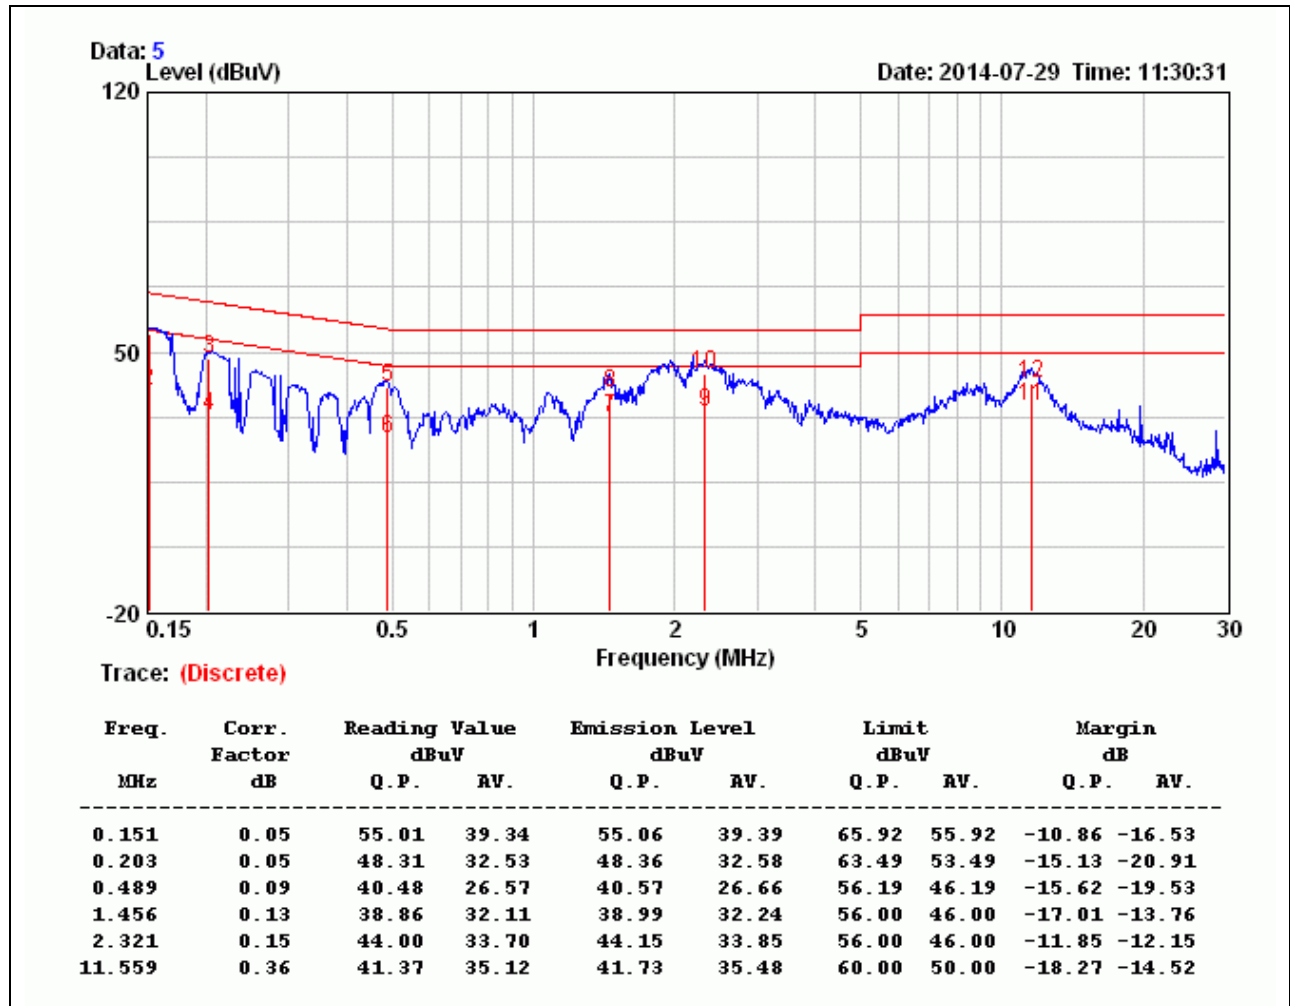

Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value