



ADDENDUM TO IMPINJ INC. TEST REPORT FC06-010H
FOR THE
RFID READER CORE, IPJ-R1000-USA1M
FCC PART 15 SUBPART C SECTIONS 15.209 & 15.247

TESTING

DATE OF ISSUE: MAY 23, 2008

DRAFT

PREPARED FOR:

Impinj Inc.
701 N. 34th Street
Seattle, WA 98103

PREPARED BY:

Mary Ellen Clayton
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

P.O. No.: 02539
W.O. No.: 83127

Date of test: September 17, 2007 -
April 28, 2008

Report No.: FC06-010I

This report contains a total of 42 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc. The results in this report apply only to the items tested, as identified herein.

TABLE OF CONTENTS

Administrative Information	3
Approvals	4
Summary of Results	4
Conditions During Testing	4
Equipment Under Test (EUT) Description	5
Equipment Under Test	5
Peripheral Devices	5
Equipment Under Test	6
Peripheral Devices	6
Report of Emissions Measurements	7
Testing Parameters	7
FCC 15.209 Radiated Emissions (Testing 2008)	9
FCC 15.247(a) Occupied Bandwidth (Testing 2007)	15
FCC 15.247(a) Dwell Time (Testing 2007)	19
FCC 15.247(a) Number of Hopping Channels (Testing 2007)	27
FCC 15.247(b) RF Power Output (Testing 2007)	31
FCC 15.247(d) Band Edge (Testing 2007)	33
FCC 15.247(d) Band Edge (Testing 2008)	38

DRAFT

ADMINISTRATIVE INFORMATION

DATE OF TEST: September 17 –
April 28, 2008

DATE OF RECEIPT: September 17, 2007

REPRESENTATIVE: Mike Thomas

MANUFACTURER:

Impinj Inc.
701 N. 34th Street
Seattle, WA 98103

TEST LOCATION:

CKC Laboratories, Inc.
5046 Sierra Pines Drive,
Mariposa, CA 95338
1120 Fulton Place
Fremont, CA 94539

TEST METHOD: ANSI C63.4 (2003)

PURPOSE OF TEST:

Original Report: To demonstrate the compliance of the Speedway Reader, IPJ-R1000, with the requirements for FCC part 15 Subpart B sections 15.107 & 15.109 Class B, Subpart C Sections 15.207, 15.209 & 15.247 and RSS-210 devices.

Addendum A: To clarify the plot on page 21 with no new testing.

Addendum B: To demonstrate the compliance of the RFID Reader, IPJ-R1000, with partial re-testing for FCC Part 15 Subpart C Sections 15.209 and 15.247 after component changes in the EUT.

Addendum C is to add limit lines to the band edge plots and revise the frequency range on page 5.

Addendum D: To demonstrate the compliance of the RFID Reader Antenna (Brickyard), IPJ-A0400-USA; RFID Reader Antenna (Guardwall), IPJ-A0401-USA and RFID Reader Antenna (Mini-Guardrail), IPJ-A0301-USA with the requirements for FCC Part 15 Subpart C Sections 15.209 & 15.247 devices with testing of new antennas.

Addendum E: To correct sequence 7 on page 12 and sequence 6 on page 18 with no new testing.

Addendum F: To demonstrate the compliance of the RFID Reader Core, IPJ-R1000-USA-0-01-01 with the requirements for FCC Part 15 Subpart C Section 15.247 devices. This EUT was re-tested with a cable attached. It will be professionally installed and the power output was measured at the end of the cable. Additional data from FC06-010A (Number of Hopping Channels, Dwell Time and Average Time of Occupancy) is included in this report because these sections were not affected by the re-testing.

Addendum G: To perform partial testing to demonstrate the RFID Reader Core, IPJ-R1000-USA1M still complies with the requirements for FCC Part 15 Subpart C Section 15.247 for: 1) hopping channel bandwidth and band-edge spurious for modify transmit data format (highest data rate mode only) and 2) reduced power channels. Both due to firmware changes only.

Addendum H: To correct the name of the test on page 29 and the units on page 30 with no new testing.

Addendum I: To perform new testing of the IPJ-R1000-USA1M with the Threshold Antenna to show compliance with the requirements of FCC Part 15 Subpart C Sections 15.209 and 15.247(d).

APPROVALS

Steve Behm, Director of Engineering Services

QUALITY ASSURANCE:

TEST PERSONNEL:




Joyce Walker, Quality Assurance Administrative Manager



Randy Clark, EMC Engineer



Mike Wilkinson, EMC Engineer/Lab Manager



Art Rice, Senior EMC Engineer



Amrinder Brar, EMC Engineer/Lab Manager

DRAFT

SUMMARY OF RESULTS

Test	Specification/Method	Results
Radiated Emissions	FCC 15.209	Pass
Occupied Bandwidth	FCC 15.247(a)	Pass
Dwell Time	FCC 15.247(a)	Pass
Number of Hopping Channels	FCC 15.247(a)	Pass
RF Power Output	FCC 15.247(b)	Pass
Band Edge	FCC 15.247(d)	Pass

CONDITIONS DURING TESTING

No modifications to the EUT were necessary during testing.

EQUIPMENT UNDER TEST (EUT) DESCRIPTION

The customer declares the EUT tested by CKC Laboratories was representative of a production unit.

EQUIPMENT UNDER TEST

RFID Reader Core

Manuf: Impinj
 Model: IPJ-R1000-USA1M
 Serial: 40306471536

EUT Power Supply

Manuf: CUI Inc
 Model: DSA-60W-20 1 24060
 Serial: 4406

PERIPHERAL DEVICES

The EUT was tested with the following peripheral device(s).

Router

Manuf: Lynksys
 Model: BEFSF41
 Serial: CB900E900020

Laptop Computer

Manuf: Toshiba
 Model: PS426U-0M1538
 Serial: 50683063U

Router Power Supply

Manuf: Lynksys
 Model: D12-1A
 Serial: NA

Mouse

Manuf: Microsoft
 Model: Intellimouse
 Serial: 00426696

Laptop Power Supply

Manuf: Toshiba
 Model: PA3201U-1ACA
 Serial: 03XV10568

DRAFT

Equipment used for 2008 testing

EQUIPMENT UNDER TEST

Speedway UHF RFID Reader

Manuf: Impinj, Inc.
Model: IPJ-R1000-USA1M
Serial: 40307140716

24VDC AC Adapter

Manuf: CUI Inc
Model: DSA-60W-20
Serial: P/N: DTS240250UC-P11P-DB

Antenna

Manuf: Impinj, Inc.
Model: Threshold
Serial: 04-28-08

PERIPHERAL DEVICES

The EUT was tested with the following peripheral device(s):

Laptop PC

Manuf: Dell
Model: Latitude D610
Serial: 3KVZ671

DRAFT

REPORT OF EMISSIONS MEASUREMENTS

TESTING PARAMETERS

TEMPERATURE AND HUMIDITY DURING TESTING

The temperature during testing was within +15°C and + 35°C.

The relative humidity was between 20% and 75%.

The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB μ V/m, the spectrum analyzer reading in dB μ V was corrected by using the following formula. This reading was then compared to the applicable specification limit.

SAMPLE CALCULATIONS		
	Meter reading	(dB μ V)
+	Antenna Factor	(dB)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	(dB μ V/m)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. The following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used. When conducted emissions testing was performed, a 10 dB external attenuator was used with internal offset correction in the analyzer.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "Peak" mode. Whenever a "Quasi-Peak" or "Average" reading is listed as one of the highest readings, this is indicated as a "QP" or an "Ave" on the appropriate rows of the data sheets. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer/receiver readings were recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature of the measuring device called "peak hold," the measuring device had the ability to measure transients or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak



When the true peak values exceeded or were within 2 dB of the specification limit, quasi-peak measurements were taken using the quasi-peak detector.

Average

For certain frequencies, average measurements may be made using the spectrum analyzer/receiver. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.

FCC 15.209 RADIATED EMISSIONS (Testing 2008)

Test Setup Photos

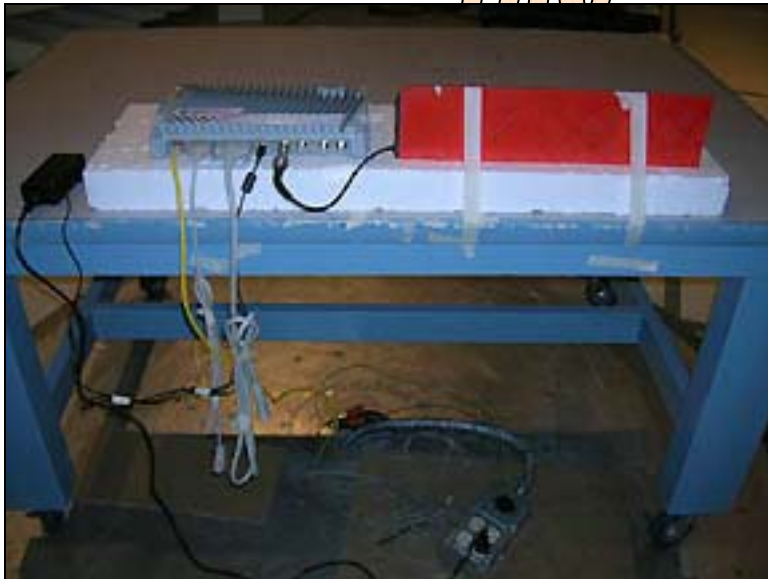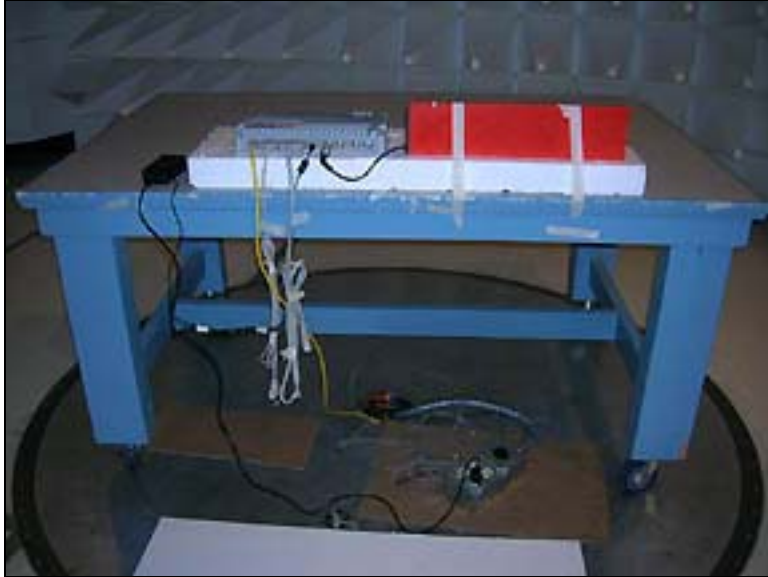



DRAFT

Test Data Sheets

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510-249-1170

Customer: **Impinj, Inc.**
 Specification: **FCC 15.209 30Mhz to 100 GHz**
 Work Order #: **83127** Date: 4/28/2008
 Test Type: **Maximized Emissions** Time: 21:44:51
 Equipment: **Antenna** Sequence#: 9
 Manufacturer: Impinj, Inc. Tested By: Art Rice
 Model: Threshold
 S/N: 04-28-08

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
E4446A Spectrum Analyzer	US44300408	03/05/2007	03/05/2009	02668
Cable, HF	n/a	06/05/2006	06/05/2008	P04240
HF Cable		03/27/2007	03/27/2009	01952
Preamp, HP83017A	3123A00283	05/16/2007	05/16/2009	00785
Antenna, Horn 1-18 GHz	1064	03/19/2007	03/19/2009	02061
Cable, 6'	n/a	06/07/2006	06/07/2008	P04241
1.5GHz HP Filter	PN 83400-80037	04/01/2008	04/01/2010	P01415

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Speedway UHF RFID Reader	Impinj, Inc.	IPJ-R1000-USA1M	40307140716
24VDC AC Adapter	CUI Inc	DSA-60W-20	P/N: DTS240250UC-P11P-DB
Antenna*	Impinj, Inc.	Threshold	04-28-08

Support Devices:

Function	Manufacturer	Model #	S/N
Laptop PC	Dell	Latitude D610	3KVZ671

Test Conditions / Notes:

Transmitting modulated carrier at full output power, 30 dBm modulated. Power output was set to +30 dBm conducted using a power meter. Low Channel: 902.75 MHz, Mid Channel: 915.25 MHz, High Channel: 927.25 MHz. Measuring spurious emissions 1-10 GHz RBW = 1 MHz; VBW = 1 MHz.

Transducer Legend:

T1=Cable P01952 2'	T2=ANP04240 HF-Heliac Cable
T3=ANP04241 HF-Heliac Cable	T4=ANT AN02061 900MHz-18.5GHz
T5=AMP-AN00785-051607	T6=HPF AN01415 1.5GHz

Measurement Data:

#	Freq MHz	Rdng dBμV	Reading listed by margin.				Test Distance: 3 Meters					
			T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant	
1	2745.752M	51.3	+0.3	+3.1	+0.6	+29.6	+0.0	49.2	54.0	-4.8	Horiz	
	Ave		-36.0	+0.3			166		Mid channel		111	
^	2745.672M	54.1	+0.3	+3.1	+0.6	+29.6	+0.0	52.0	54.0	-2.0	Horiz	
			-36.0	+0.3			166		Mid channel		111	

3	5416.505M Ave	43.4	+0.4 -34.9	+4.5 +0.2	+0.9	+34.2	+0.0 185	48.7	54.0 Low Channel	-5.3	Vert 109
^	5416.475M	48.0	+0.4 -34.9	+4.5 +0.2	+0.9	+34.2	+0.0 185	53.3	54.0 Low Channel	-0.7	Vert 109
5	2745.752M Ave	49.8	+0.3 -36.0	+3.1 +0.3	+0.6	+29.6	+0.0 164	47.7	54.0 Mid channel	-6.3	Vert 124
^	2745.690M	52.7	+0.3 -36.0	+3.1 +0.3	+0.6	+29.6	+0.0 164	50.6	54.0 Mid channel	-3.4	Vert 124
7	3661.008M Ave	46.1	+0.4 -35.1	+3.6 +0.2	+0.6	+31.7	+0.0 169	47.5	54.0 Mid channel	-6.5	Horiz 112
^	3660.930M	49.5	+0.4 -35.1	+3.6 +0.2	+0.6	+31.7	+0.0 169	50.9	54.0 Mid channel	-3.1	Horiz 112
9	3661.002M Ave	45.9	+0.4 -35.1	+3.6 +0.2	+0.6	+31.7	+0.0 214	47.3	54.0 Mid channel	-6.7	Vert 115
^	3661.008M	51.5	+0.4 -35.1	+3.6 +0.2	+0.6	+31.7	+0.0 214	52.9	54.0 Mid channel	-1.1	Vert 115
11	2708.262M Ave	49.1	+0.3 -36.0	+3.1 +0.3	+0.6	+29.4	+0.0 156	46.8	54.0 Low Channel	-7.2	Horiz 110
^	2708.250M	56.0	+0.3 -36.0	+3.1 +0.3	+0.6	+29.4	+0.0 156	53.7	54.0 Low Channel	-0.3	Horiz 110
13	2708.257M Ave	48.3	+0.3 -36.0	+3.1 +0.3	+0.6	+29.4	+0.0 178	46.0	54.0 Low Channel	-8.0	Vert 130
^	2708.180M	55.3	+0.3 -36.0	+3.1 +0.3	+0.6	+29.4	+0.0 178	53.0	54.0 Low Channel	-1.0	Vert 130
15	5416.507M Ave	38.9	+0.4 -34.9	+4.5 +0.2	+0.9	+34.2	+0.0 167	44.2	54.0 Low Channel	-9.8	Horiz 105
^	5416.475M	46.0	+0.4 -34.9	+4.5 +0.2	+0.9	+34.2	+0.0 167	51.3	54.0 Low Channel	-2.7	Horiz 105
17	3611.011M Ave	41.7	+0.2 -35.2	+4.0 +0.2	+0.7	+31.6	+0.0 239	43.2	54.0 Low Channel	-10.8	Horiz 143
^	3611.075M	48.6	+0.2 -35.2	+4.0 +0.2	+0.7	+31.6	+0.0 239	50.1	54.0 Low Channel	-3.9	Horiz 143
19	4576.262M Ave	38.7	+0.4 -34.8	+3.9 +0.2	+0.9	+32.7	+0.0 191	42.0	54.0 Mid channel	-12.0	Vert 113
^	4576.184M	47.7	+0.4 -34.8	+3.9 +0.2	+0.9	+32.7	+0.0 191	51.0	54.0 Mid channel	-3.0	Vert 113
21	2781.750M Ave	43.4	+0.3 -36.0	+3.1 +0.3	+0.6	+29.7	+0.0 200	41.4	54.0 High Channel	-12.6	Vert 106
^	2781.736M	51.9	+0.3 -36.0	+3.1 +0.3	+0.6	+29.7	+0.0 200	49.9	54.0 High Channel	-4.1	Vert 106
23	4576.246M Ave	38.1	+0.4 -34.8	+3.9 +0.2	+0.9	+32.7	+0.0 130	41.4	54.0 Mid channel	-12.6	Horiz 113
^	4576.222M	45.9	+0.4 -34.8	+3.9 +0.2	+0.9	+32.7	+0.0 130	49.2	54.0 Mid channel	-4.8	Horiz 113
25	4636.239M Ave	37.7	+0.5 -34.8	+3.9 +0.2	+0.8	+32.8	+0.0 168	41.1	54.0 High Channel	-12.9	Horiz 100
^	4636.219M	46.6	+0.5 -34.8	+3.9 +0.2	+0.8	+32.8	+0.0 168	50.0	54.0 High Channel	-4.0	Horiz 100

27	3708.998M Ave	38.8	+0.4 -35.1	+3.7 +0.2	+0.8	+31.8	+0.0 186	40.6	54.0 High Channel	-13.4	Vert 130
^	3709.033M	47.4	+0.4 -35.1	+3.7 +0.2	+0.8	+31.8	+0.0 186	49.2	54.0 High Channel	-4.8	Vert 130
29	5491.502M Ave	35.1	+0.5 -34.9	+4.3 +0.2	+0.8	+34.3	+0.0 224	40.3	54.0 Mid channel	-13.7	Vert 115
^	5491.512M	44.1	+0.5 -34.9	+4.3 +0.2	+0.8	+34.3	+0.0 224	49.3	54.0 Mid channel	-4.7	Vert 115
31	3708.996M Ave	38.4	+0.4 -35.1	+3.7 +0.2	+0.8	+31.8	+0.0 178	40.2	54.0 High Channel	-13.8	Horiz 114
^	3708.998M	46.6	+0.4 -35.1	+3.7 +0.2	+0.8	+31.8	+0.0 178	48.4	54.0 High Channel	-5.6	Horiz 114
33	5563.500M Ave	34.6	+0.5 -34.9	+4.4 +0.2	+0.8	+34.4	+0.0 237	40.0	54.0 High Channel	-14.0	Vert 114
^	5563.492M	44.3	+0.5 -34.9	+4.4 +0.2	+0.8	+34.4	+0.0 237	49.7	54.0 High Channel	-4.3	Vert 114
35	4636.250M Ave	36.6	+0.5 -34.8	+3.9 +0.2	+0.8	+32.8	+0.0 179	40.0	54.0 High Channel	-14.0	Vert 100
^	4636.282M	46.6	+0.5 -34.8	+3.9 +0.2	+0.8	+32.8	+0.0 179	50.0	54.0 High Channel	-4.0	Vert 100
37	2781.752M Ave	41.4	+0.3 -36.0	+3.1 +0.3	+0.6	+29.7	+0.0 161	39.4	54.0 High Channel	-14.6	Horiz 109
^	2781.736M	51.5	+0.3 -36.0	+3.1 +0.3	+0.6	+29.7	+0.0 161	49.5	54.0 High Channel	-4.5	Horiz 109
39	9152.432M Ave	27.4	+0.2 -35.1	+6.2 +0.4	+1.4	+38.9	+0.0 218	39.4	54.0 Mid channel	-14.6	Vert 115
^	9152.464M	40.1	+0.2 -35.1	+6.2 +0.4	+1.4	+38.9	+0.0 218	52.1	54.0 Mid channel	-1.9	Vert 115
41	4513.749M Ave	36.2	+0.3 -34.8	+4.0 +0.2	+1.0	+32.5	+0.0 194	39.4	54.0 Low Channel	-14.6	Horiz 104
^	4513.701M	46.2	+0.3 -34.8	+4.0 +0.2	+1.0	+32.5	+0.0 191	49.4	54.0 Low Channel	-4.6	Horiz 106
43	4513.757M Ave	36.2	+0.3 -34.8	+4.0 +0.2	+1.0	+32.5	+0.0 196	39.4	54.0 Low Channel	-14.6	Vert 99
^	4513.779M	46.0	+0.3 -34.8	+4.0 +0.2	+1.0	+32.5	+0.0 196	49.2	54.0 Low Channel	-4.8	Vert 99
45	5563.550M Ave	32.6	+0.5 -34.9	+4.4 +0.2	+0.8	+34.4	+0.0 180	38.0	54.0 High Channel	-16.0	Horiz 102
^	5563.474M	43.9	+0.5 -34.9	+4.4 +0.2	+0.8	+34.4	+0.0 180	49.3	54.0 High Channel	-4.7	Horiz 102
47	5491.501M Ave	32.5	+0.5 -34.9	+4.3 +0.2	+0.8	+34.3	+0.0 164	37.7	54.0 Mid channel	-16.3	Horiz 102
^	5491.485M	43.8	+0.5 -34.9	+4.3 +0.2	+0.8	+34.3	+0.0 164	49.0	54.0 Mid channel	-5.0	Horiz 102
49	3611.025M Ave	35.4	+0.2 -35.2	+4.0 +0.2	+0.7	+31.6	+0.0 212	36.9	54.0 Low Channel	-17.1	Vert 99
^	3611.075M	48.1	+0.2 -35.2	+4.0 +0.2	+0.7	+31.6	+0.0 212	49.6	54.0 Low Channel	-4.4	Vert 99

51	1830.500M	71.0	+0.2 -36.9	+2.4 +0.6	+0.5	+27.3	+0.0 222	65.1	112.5 Mid channel	-47.4	Horiz 104
52	1830.508M	70.9	+0.2 -36.9	+2.4 +0.6	+0.5	+27.3	+0.0 156	65.0	112.5 Mid channel	-47.5	Vert 100
53	1805.450M	67.0	+0.2 -36.9	+2.4 +0.7	+0.5	+27.1	+0.0 251	61.0	112.5 Low Channel	-51.5	Vert 99
54	1854.532M	66.1	+0.2 -36.8	+2.4 +0.6	+0.5	+27.5	+0.0 146	60.5	112.5 High Channel	-52.0	Vert 146
55	1854.526M	64.5	+0.2 -36.8	+2.4 +0.6	+0.5	+27.5	+0.0 220	58.9	112.5 High Channel	-53.6	Horiz 178
56	1805.338M	57.6	+0.2 -36.9	+2.4 +0.7	+0.5	+27.1	+0.0 250	51.6	112.5 Low Channel	-60.9	Horiz 112

DRAFT

FCC 15.247(a) OCCUPIED BANDWIDTH (Testing 2007)

Test Equipment

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
Cable, SMElectronics	432007	04/23/2007	04/23/2009	P05178
Attenuator 30dB, Bird	9724	05/09/2007	05/09/2009	P01577
25A-MFN-30				

Test Conditions

RFID reader is connected to laptop via the router. Laptop is used for configuration of the EUT. RF port 1 connected with suitable attenuation to Spectrum Analyzer via provided RF cable. Normal power mode investigated. Interrogator transmitting at max power with modulation. Reader set up in bench area.

Low Channel: 902.75 MHz

Mid Channel: 914.75 MHz

High Channel: 927.25 MHz

Transmitter mode is set for the highest data rate. Equipment contains other data rates with bandwidth <250 kHz. Therefore, the more stringent requirements are applied to the 15.247(a) average time of occupancy requirements.


Frequency range under investigation: 902 MHz - 928 MHz

Test Setup Photos




Test Plots

OCCUPIED BANDWIDTH - LOW CHANNEL

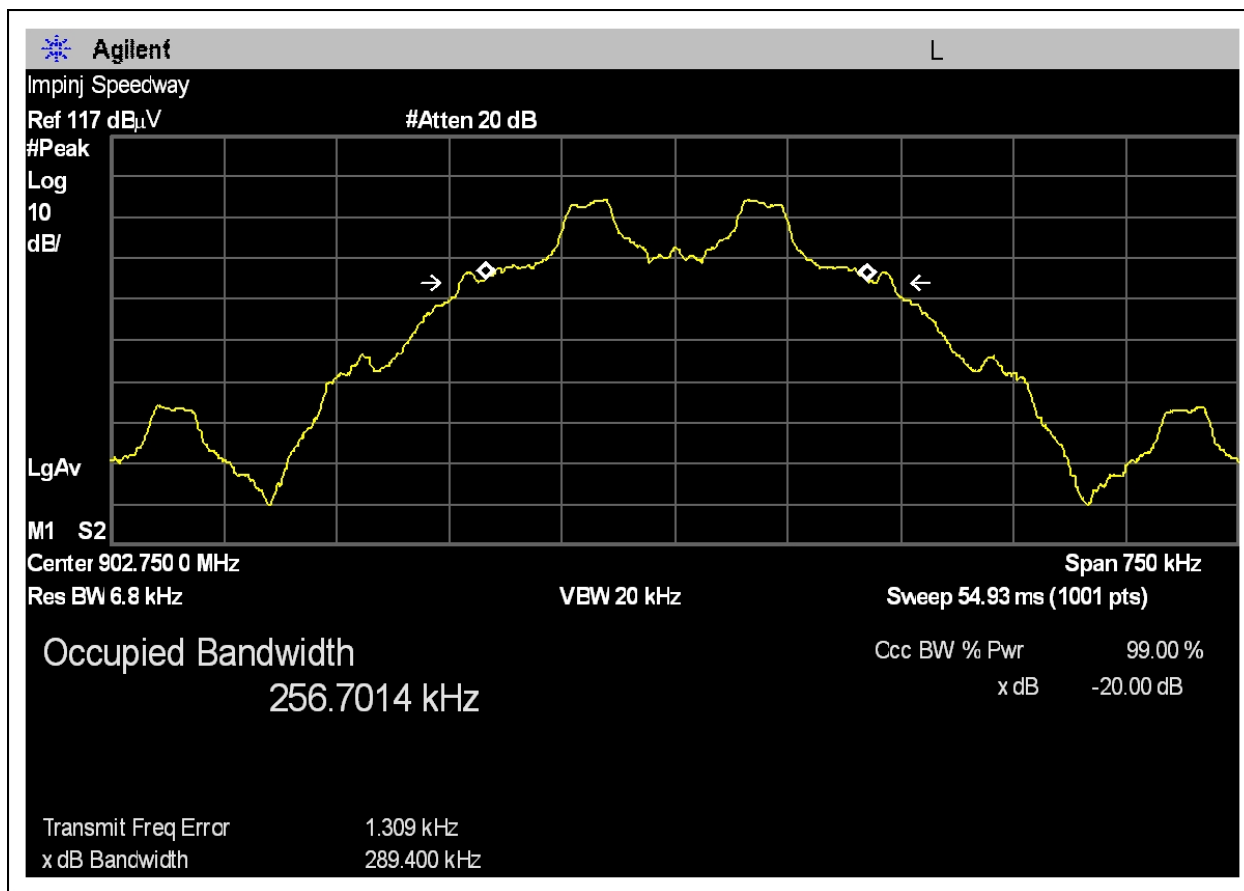


Tested by Randal Clark, 2007

OCCUPIED BANDWIDTH - MID CHANNEL

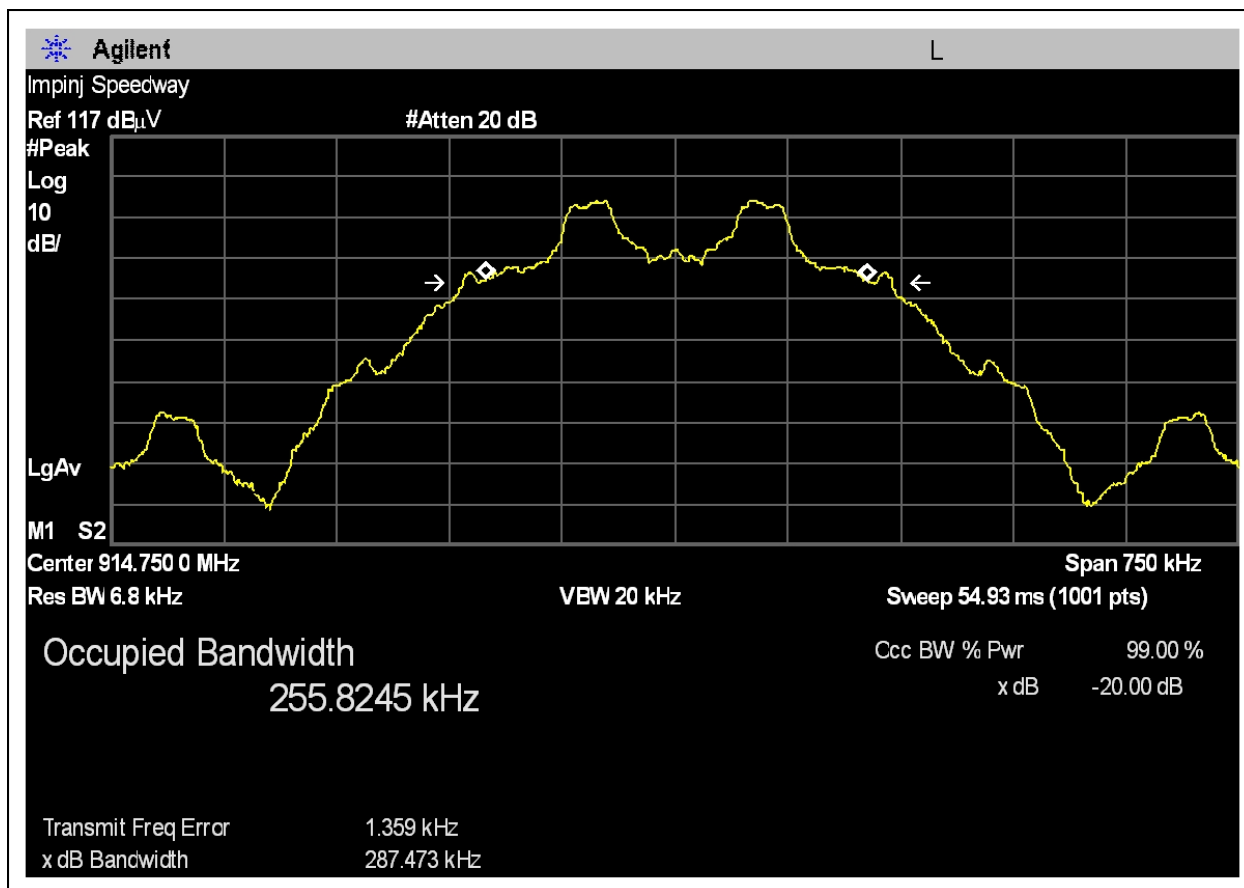

Tested by Randal Clark, 2007

OCCUPIED BANDWIDTH - HIGH CHANNEL

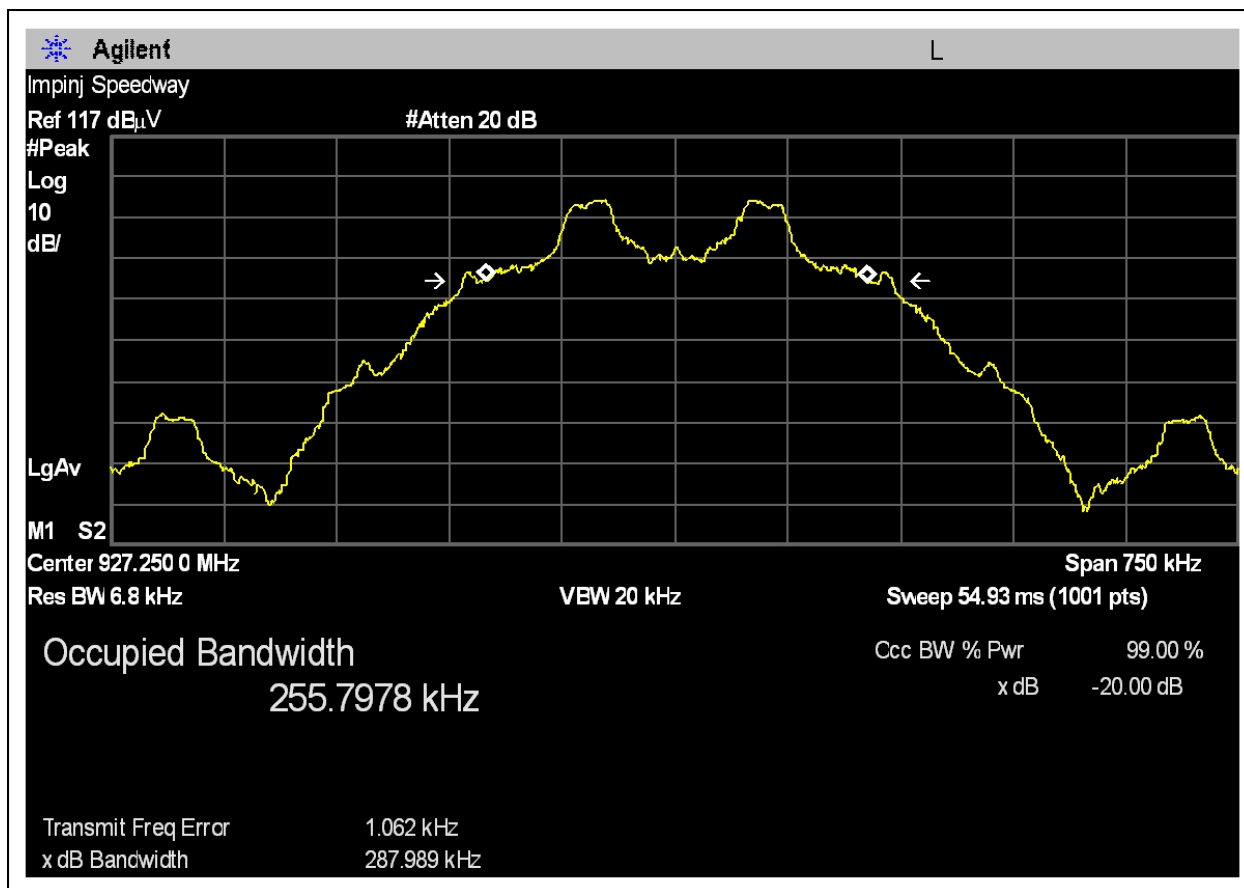

Tested by Randal Clark, 2007

FCC 15.247(a) DWELL TIME (Testing 2007)

Test Equipment

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
Cable, SMElectronics	432007	04/23/2007	04/23/2009	P05178
Attenuator 30dB, Bird	9724	05/09/2007	05/09/2009	P01577
25A-MFN-30				

Test Conditions

RFID reader is connected to laptop via the router. Laptop is used for configuration of the EUT. RF port 1 connected with suitable attenuation to Spectrum Analyzer via provided RF cable. Both normal power and low power modes investigated. Interrogator transmitting at max power with modulation. Reader set up in bench area

Mid Channel: 914.75 MHz

Frequency range under investigation: 902-928MHz

The analyzer is set to video trigger at 20dB below the carrier output level.

Low power mode:

The low power mode dwell time varies depending on the number of low power channels chosen.


The minimum number of low power channels allowed by the manufacturer is 2 in which the following is measured: There is a pulse train repetition which repeats approximately every 10.28 seconds. There are therefore 1.946 pulse trains per 20 second window. There are 20 individual pulses per pulse train. Each individual pulse has an average duration of 10.056ms. The pulses were averaged using video trace averaging over 200 samples. Therefore the average on time in any 20 second window is $1.946 * 10.056 * \text{ms} * 20 = 391.28\text{ms}$. This satisfies the 400ms on time requirement in any 20 second window.

The maximum number of low power channels allowed by the manufacturer is 16 in which the following is measured: There is a pulse repetition which repeats approximately every 10.18 seconds. There are two pulses which occur within the pulse train with periods of 5.3 and 4.9 seconds respectively. There are therefore 3.93 pulses per 20 second window. Each pulse has an average duration of 99.99ms. The pulses were averaged using video trace averaging over 150 samples. Therefore the average on time in any 20 second window is $3.93 * 99.99 = 392.96\text{ms}$. This satisfies the 400ms on time requirement in any 20 second window.

High power mode:


There is a pulse repetition which repeats approximately every 10.2 seconds. There are therefore 1.96 pulses per 20 second window. The average on time per pulse is 201.23ms (averaged over 10 pulses). Therefore the average on time in any 20 second window is $1.96 * 201.23 = 394.56\text{ms}$. This satisfies the 400ms on time requirement in any 20 second window.

Test Setup Photos

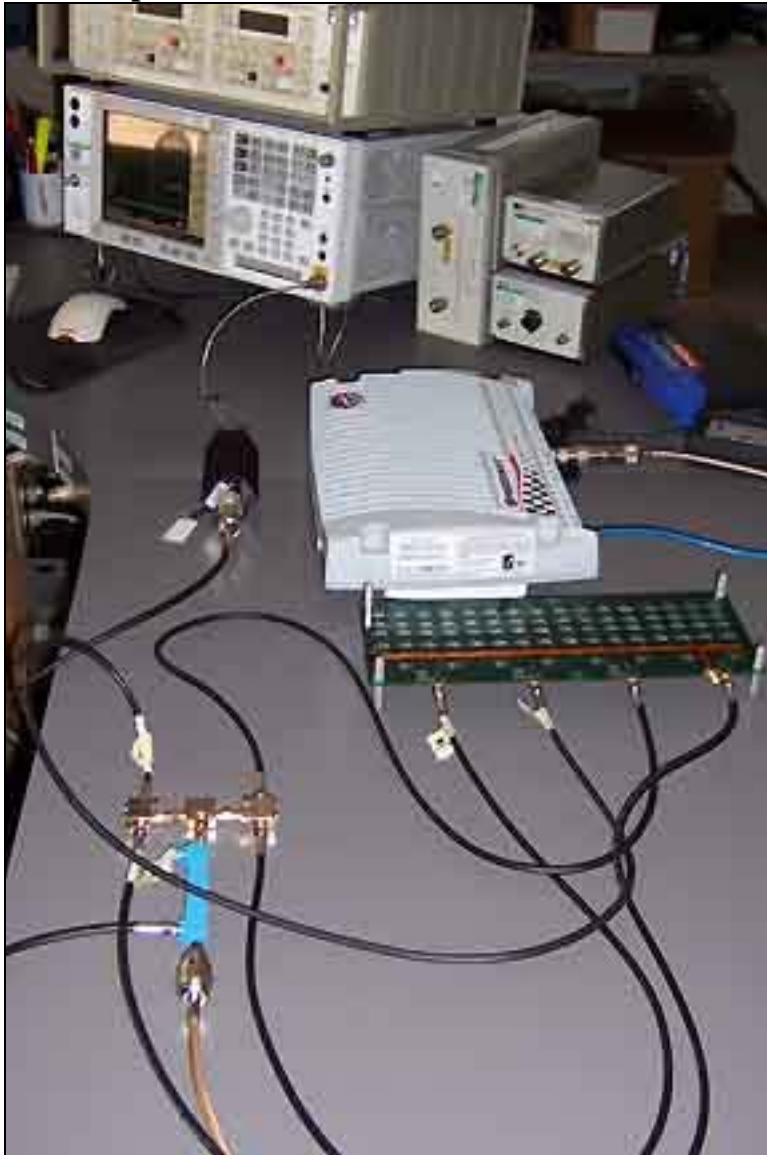


Test Plots

DWELL TIME - LOW POWER 2 CHANNELS 20sec

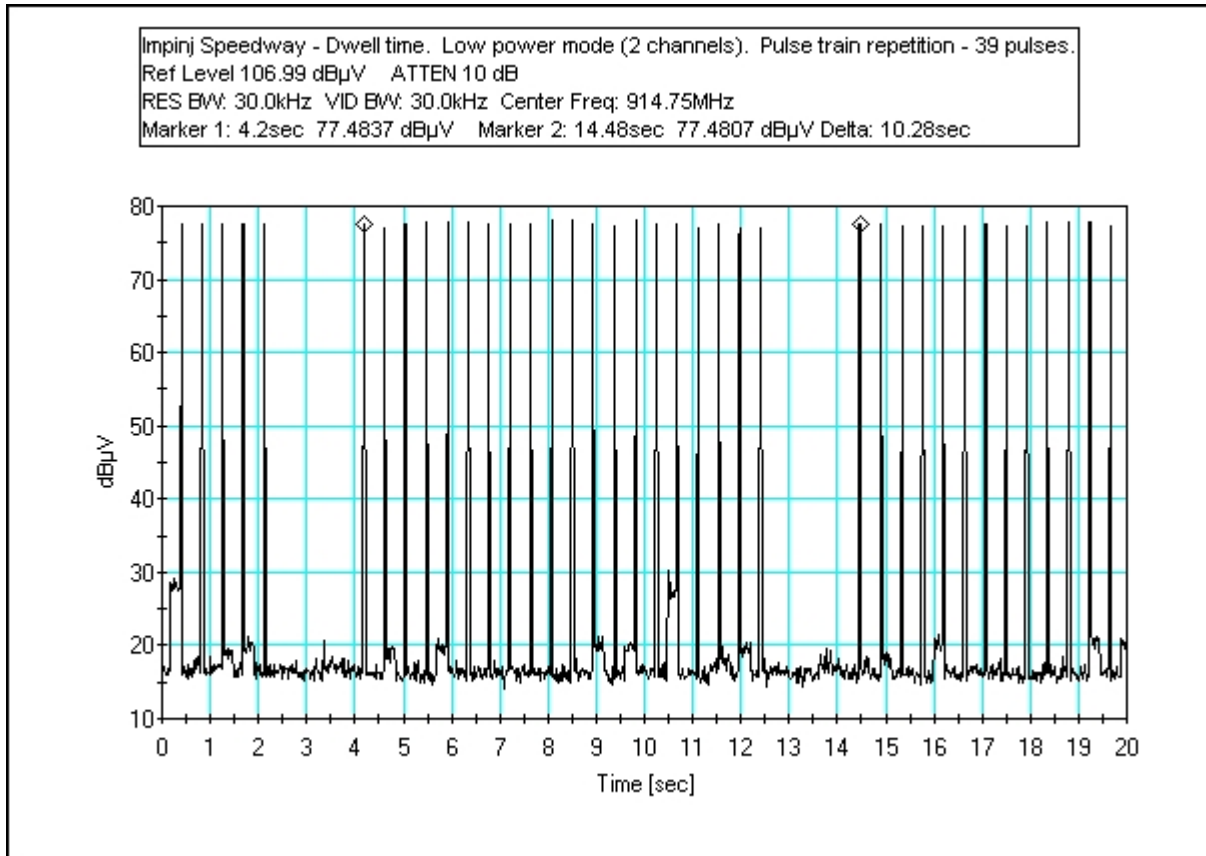

Tested by Randal Clark, 2007


DWELL TIME - LOW POWER 2 CHANNELS 12ms

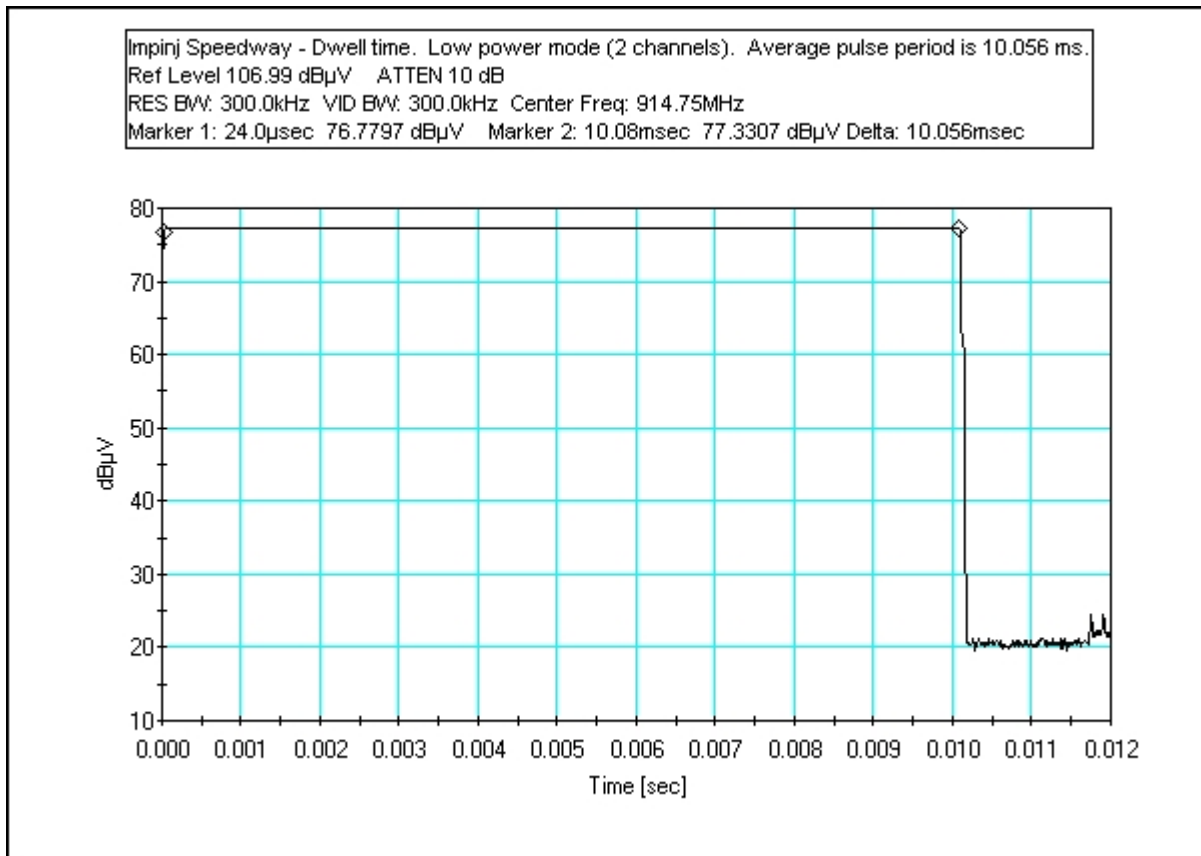


Tested by Randal Clark, 2007

DWELL TIME - LOW POWER 16 CHANNELS 20sec

Note: See explanation on page 17.

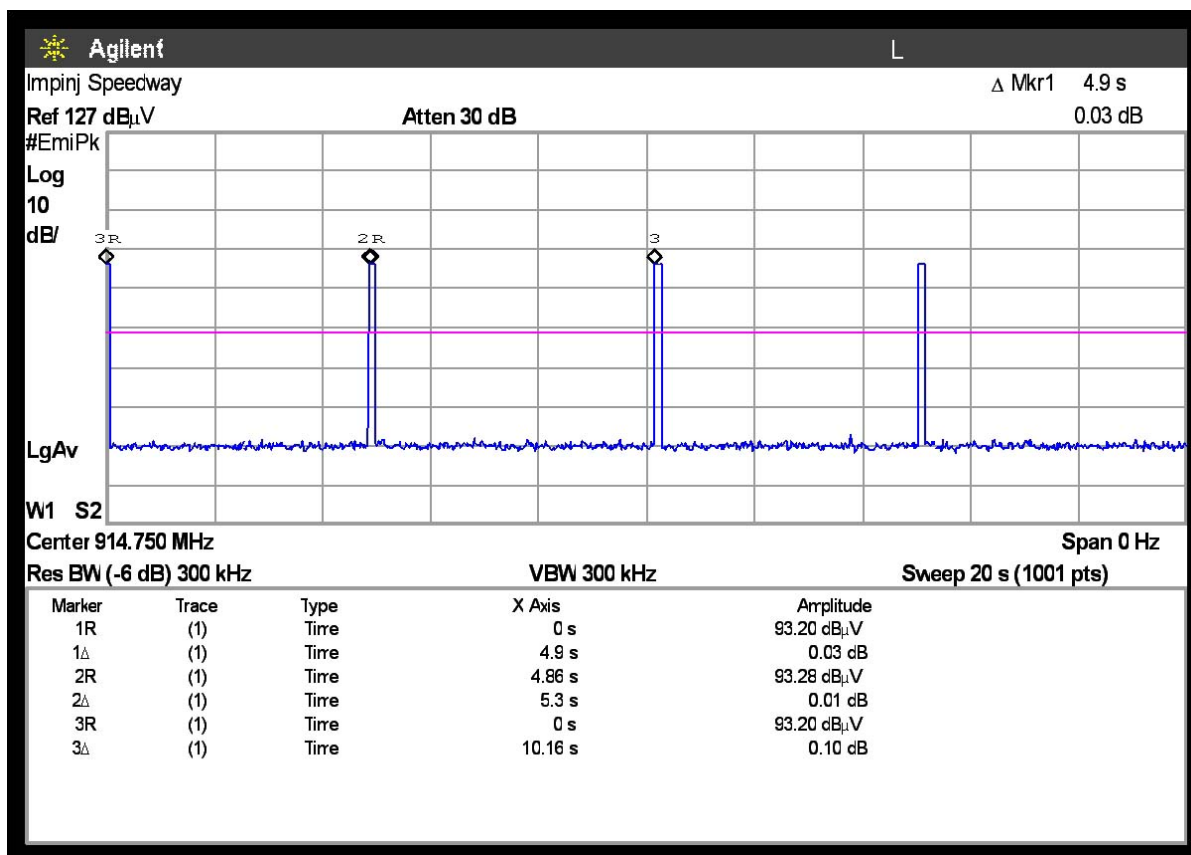


DWELL TIME - LOW POWER 16 CHANNELS 110ms

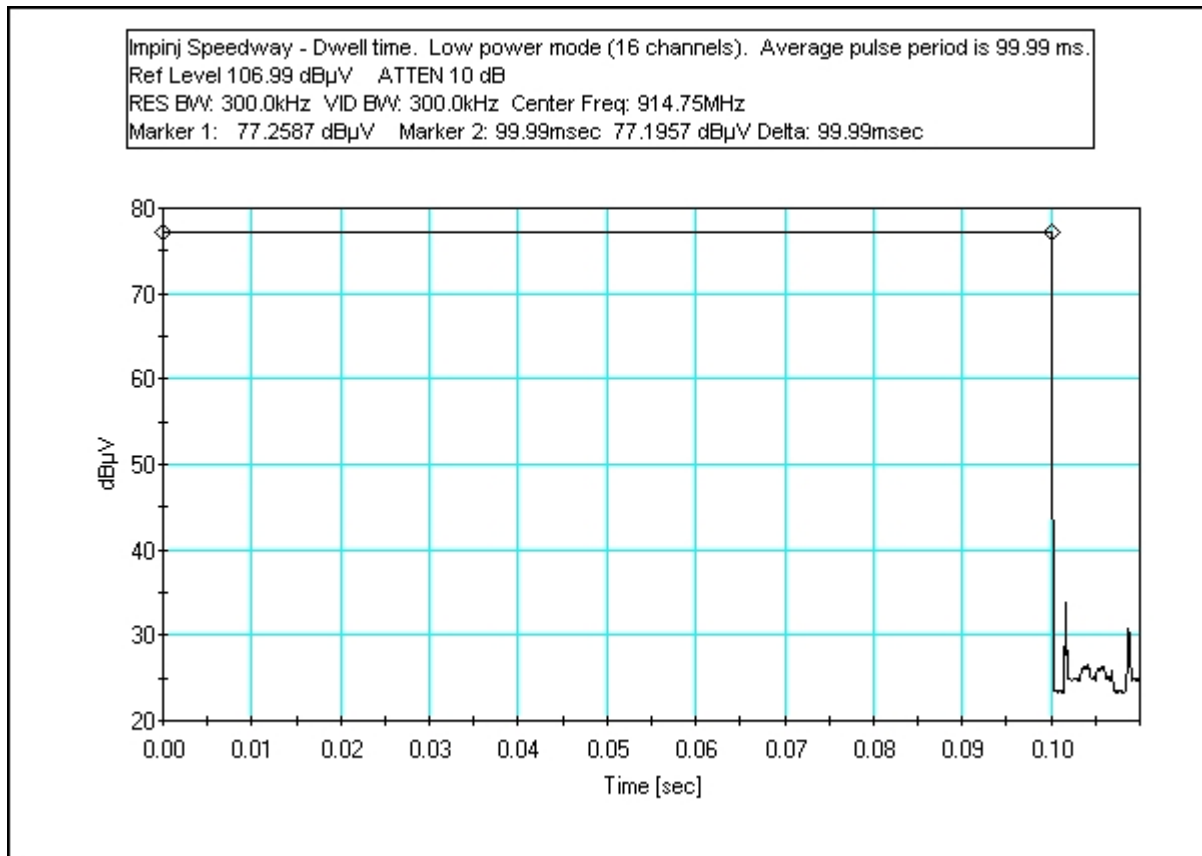

Tested by Randal Clark, 2007


DWELL TIME - HIGH POWER 20sec

Note: See explanation on page 17.

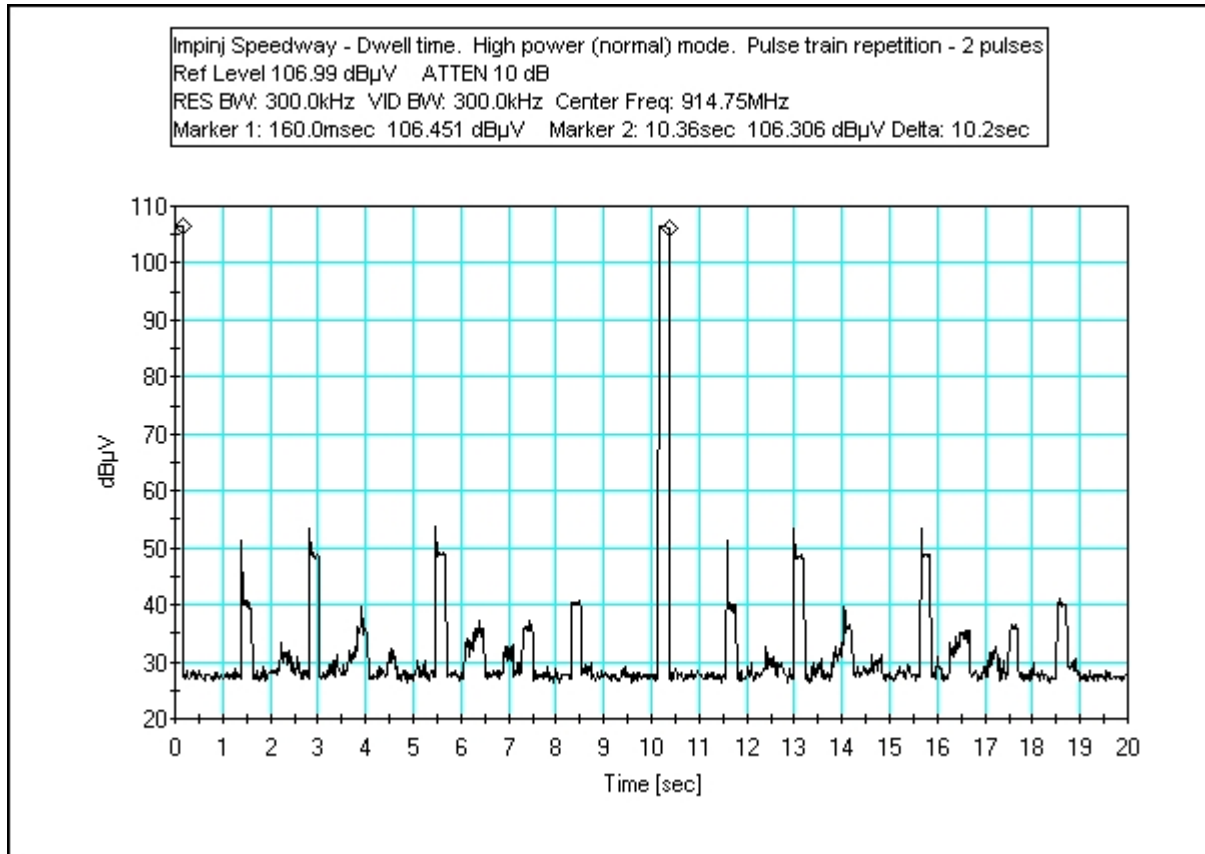

Tested by Randal Clark, 2007

DWELL TIME - HIGH POWER 201ms

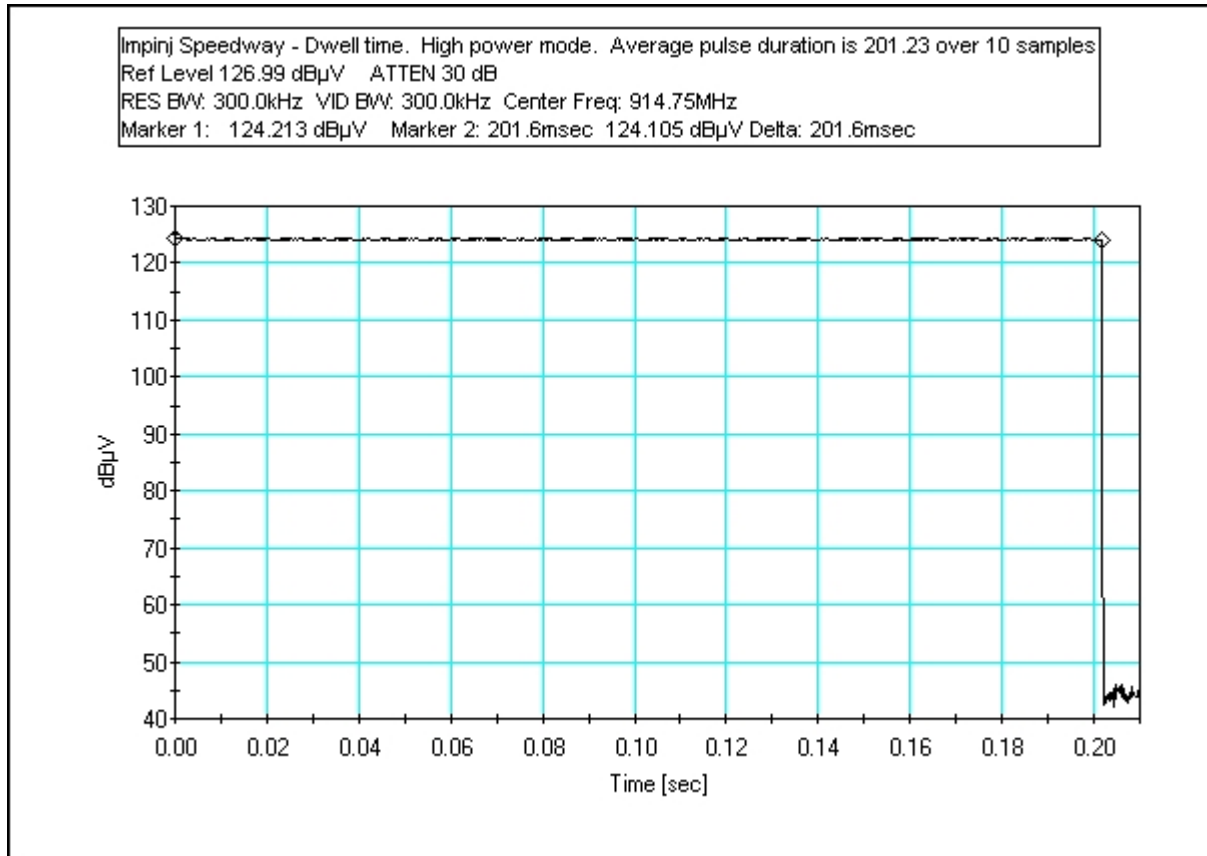

Tested by Randal Clark, 2007

FCC 15.247(a) NUMBER OF HOPPING CHANNELS (Testing 2007)

Test Equipment


Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
Cable, SMElectronics	432007	04/23/2007	04/23/2009	P05178
Attenuator 30dB, Bird 25A-MFN-30	9724	05/09/2007	05/09/2009	P01577

Test Conditions

RFID reader is connected to laptop via the router. Laptop is used for configuration of the EUT. RF port 1 connected with suitable attenuation to Spectrum Analyzer via provided RF cable. Both normal power and low power modes investigated. Interrogator transmitting with modulation. Reader set up in bench area.


Frequency range under investigation: 902-928 MHz

Test Setup Photos

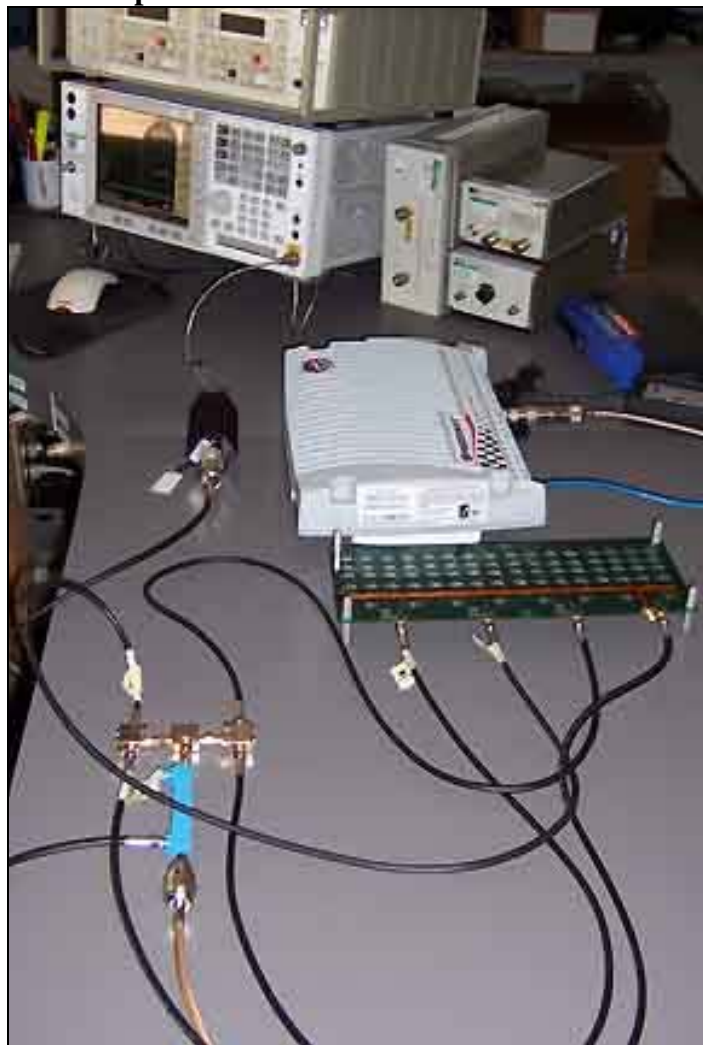


Test Plots

NUMBER OF HOPPING CHANNELS 01-15 SET TO LOW POWER

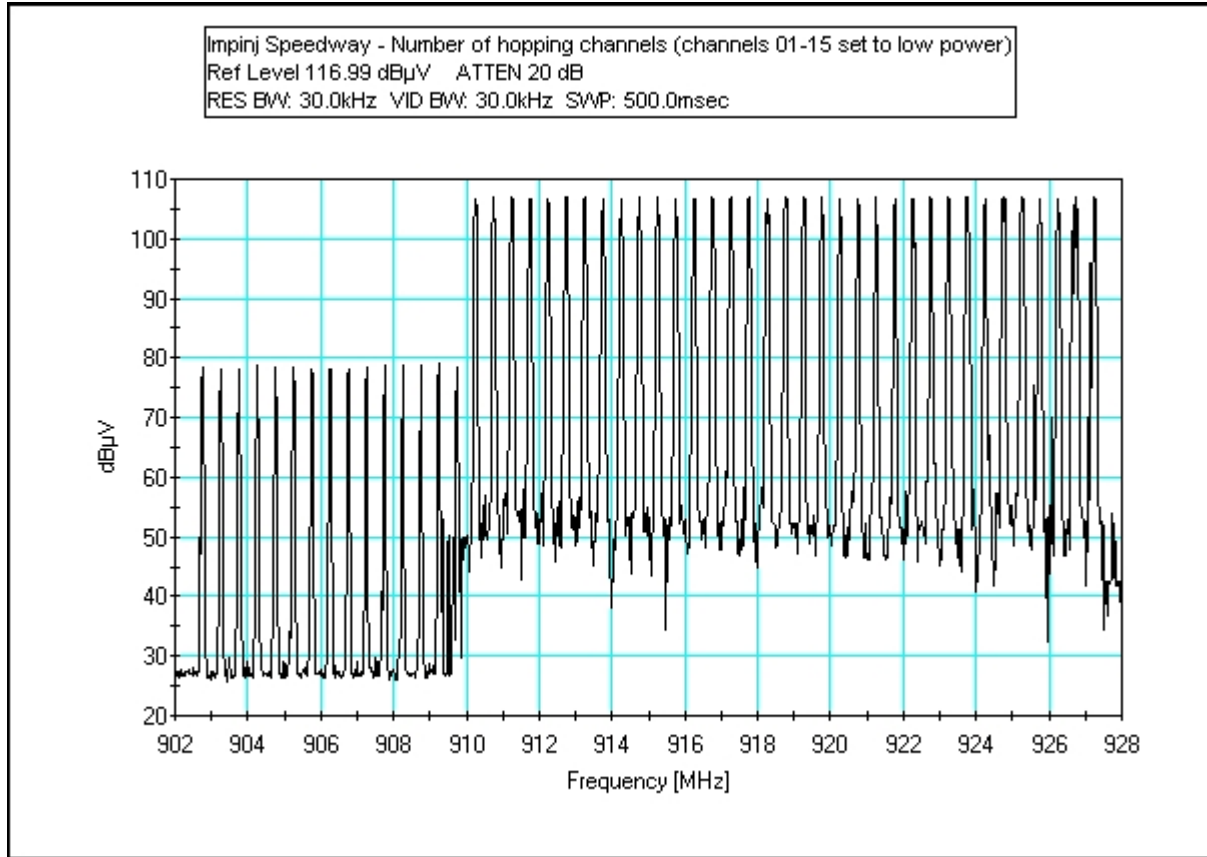


Tested by Randal Clark, 2007

NUMBER OF HOPPING CHANNELS 11-20 SET TO LOW POWER

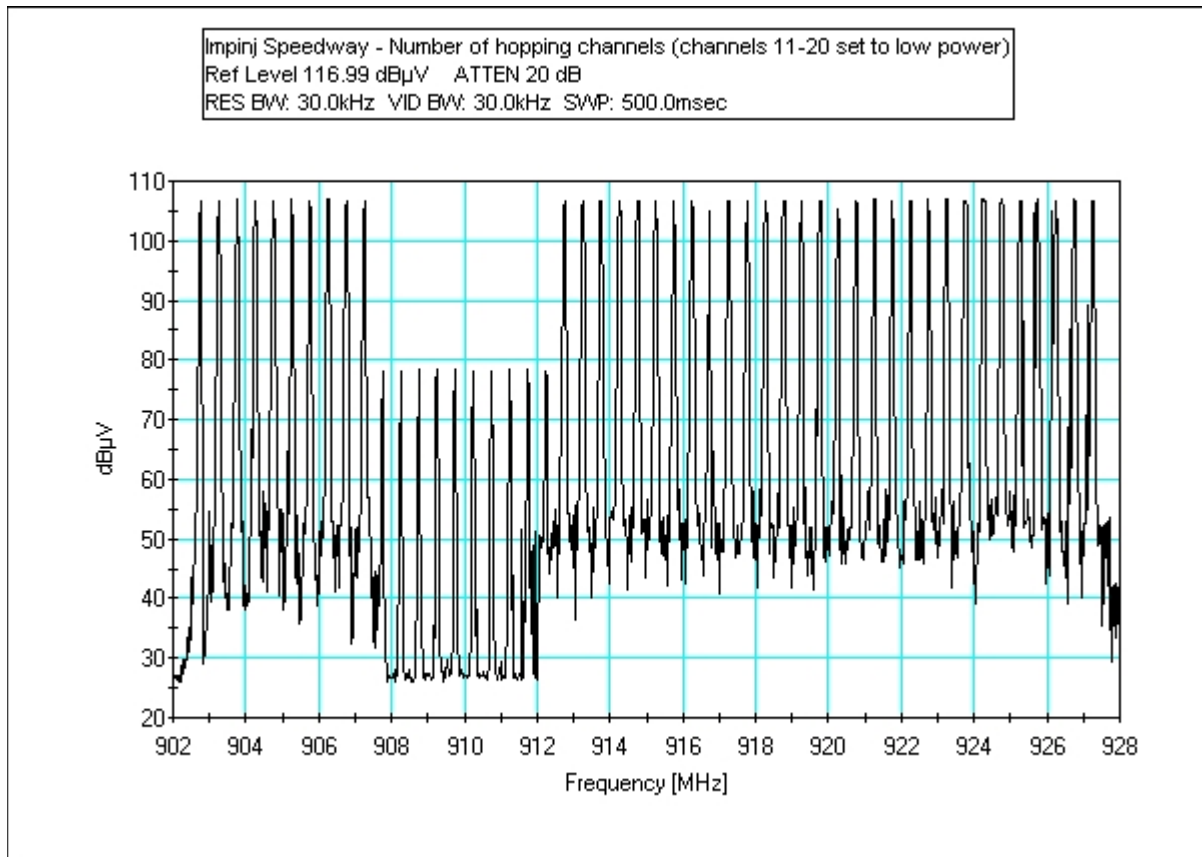

Tested by Randal Clark, 2007

NUMBER OF HOPPING CHANNELS 31-40 SET TO LOW POWER

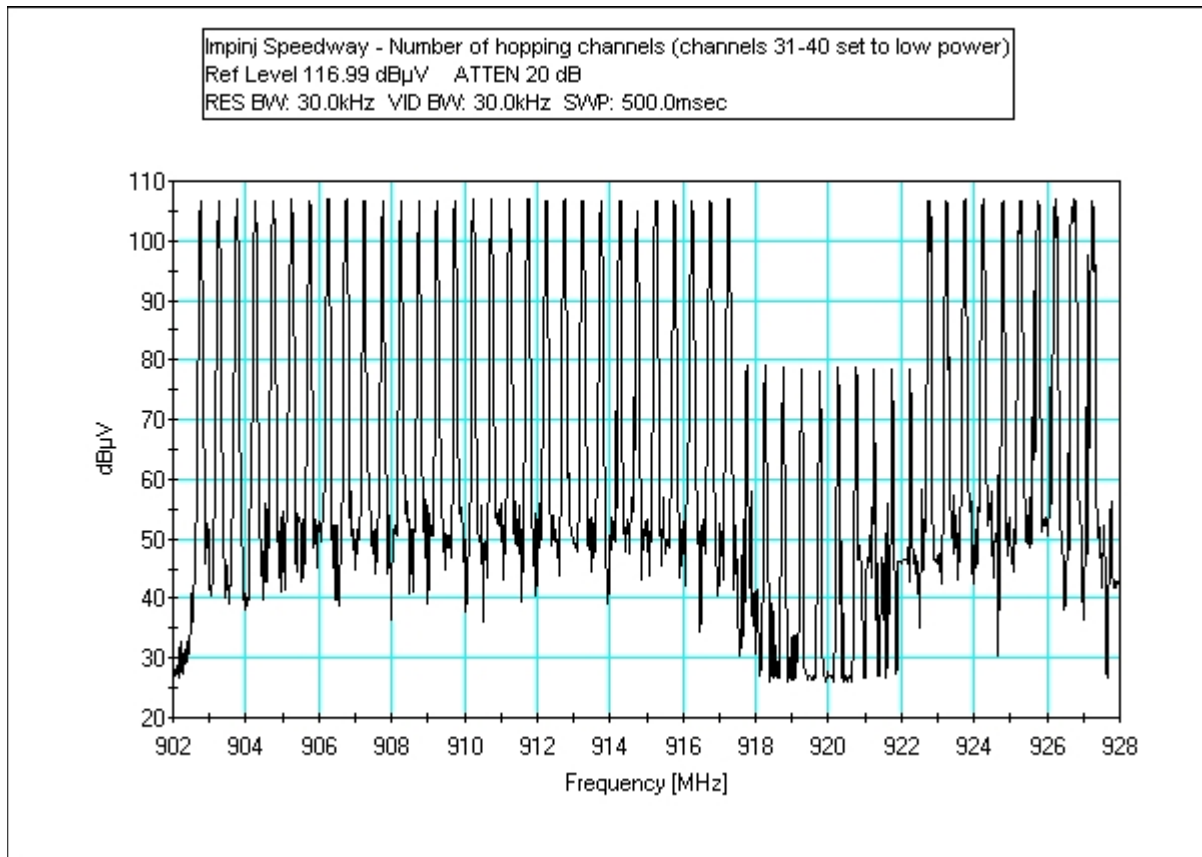

Tested by Randal Clark, 2007

FCC 15.247(b) RF POWER OUTPUT (Testing 2007)

Test Setup Photos



Test Data Sheets

Test Location: CKC Laboratories, Inc. • 4933 Sierra Fines Dr • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **Impinj Inc.**
 Specification: **15.247(b)(3)**
 Work Order #: **86329**
 Test Type: **Antenna Conducted**
 Equipment: **RFID Reader Core**
 Manufacturer: **Impinj**
 Model: **IPJ-R1000-USA1M**
 S/N: **40306471536**

Date: 9/17/2007
 Time: 09:46:13
 Sequence#: 1
 Tested By: Randal Clark
 120V 60Hz

DRAFT

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
Cable, SMElectronics	432007	04/23/2007	04/23/2009	P05178
Attenuator 30dB, Bird 25A-MFN-30	9724	05/09/2007	05/09/2009	P01577

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
RFID Reader Core*	Impinj	IPJ-R1000-USA1M	40306471536
EUT Power Supply	CUI Inc	DSA-60W-20 1 24060	4406

Support Devices:

Function	Manufacturer	Model #	S/N
Router	Lynksys	BEFSF41	CB900E900020
Router Power Supply	Lynksys	D12-1A	NA
Laptop Computer	Toshiba	PS426U-0M1538	50683063U
Laptop Power Supply	Toshiba	PA3201U-1ACA	03XV10568
Mouse	Microsoft	Intellimouse	00426696

Test Conditions / Notes:

RFID reader is connected to laptop via the router. Laptop is used for configuration of the EUT. RF port 1 connected with suitable attenuation to Spectrum Analyzer via provided RF cable. Both normal power and low power modes investigated. Interrogator transmitting at max power with modulation. Reader set up in bench area Low Channel: 902.75 MHz, Mid Channel: 914.75 MHz, High Channel: 927.25 MHz. Measuring RF Power Output. Frequency range under investigation: 902 MHz - 928 MHz RBW = 1MHz; VBW = 1MHz.

Transducer Legend:

T1=Cable Sun Moon 12" 40GHz P05178 T2=Pad 30dB P1577

Measurement Data: Reading listed by margin. Test Lead: Antenna 1

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	Dist dB	Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	902.750M	106.3	+0.2	+30.2		+0.0	136.7	137.0	-0.3	Anten
2	927.250M	106.3	+0.2	+30.2		+0.0	136.7	137.0	-0.3	Anten
3	914.750M	106.3	+0.2	+30.2		+0.0	136.7	137.0	-0.3	Anten
4	927.250M	78.9	+0.2	+30.2		+0.0	109.3	137.0	-27.7	Anten
										Low Power Mode
5	914.750M	78.2	+0.2	+30.2		+0.0	108.6	137.0	-28.4	Anten
										Low Power Mode
6	902.750M	78.1	+0.2	+30.2		+0.0	108.5	137.0	-28.5	Anten
										Low Power Mode

DRAFT

FCC 15.247(d) BAND EDGE (Testing 2007)

Test Equipment

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
Cable, SMElectronics	432007	04/23/2007	04/23/2009	P05178
Attenuator 30dB, Bird	9724	05/09/2007	05/09/2009	P01577
25A-MFN-30				

Test Conditions

RFID reader is connected to laptop via the router. Laptop is used for configuration of the EUT. RF port 1 connected with suitable attenuation to Spectrum Analyzer via provided RF cable. Both normal power and low power modes investigated. Interrogator transmitting with modulation. Reader set up in bench area.


Frequency range under investigation: Band Edge

Test Setup Photos




Test Plots

BAND EDGE - LOW CHANNEL LOW POWER

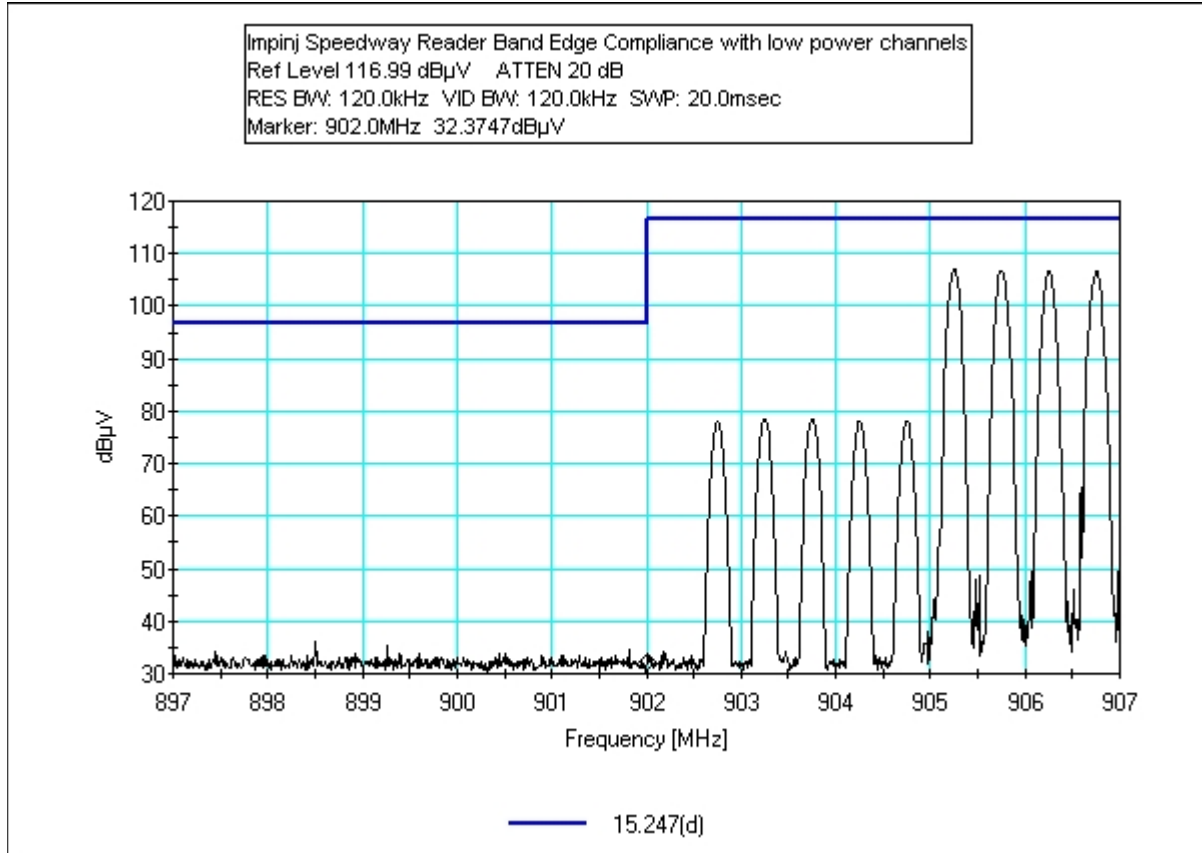


Tested by Randal Clark, 2007

BAND EDGE - LOW CHANNEL HIGH POWER

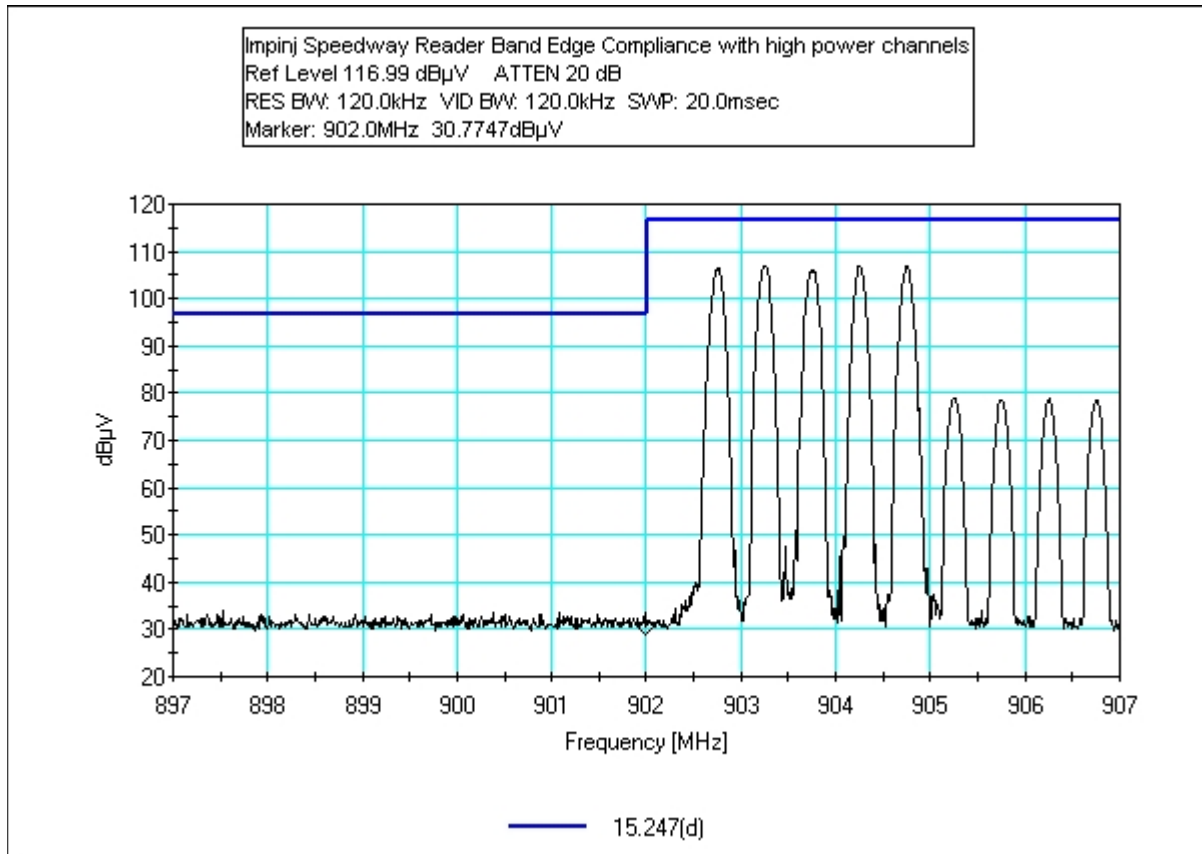


Tested by Randal Clark, 2007

BAND EDGE - HIGH CHANNEL LOW POWER

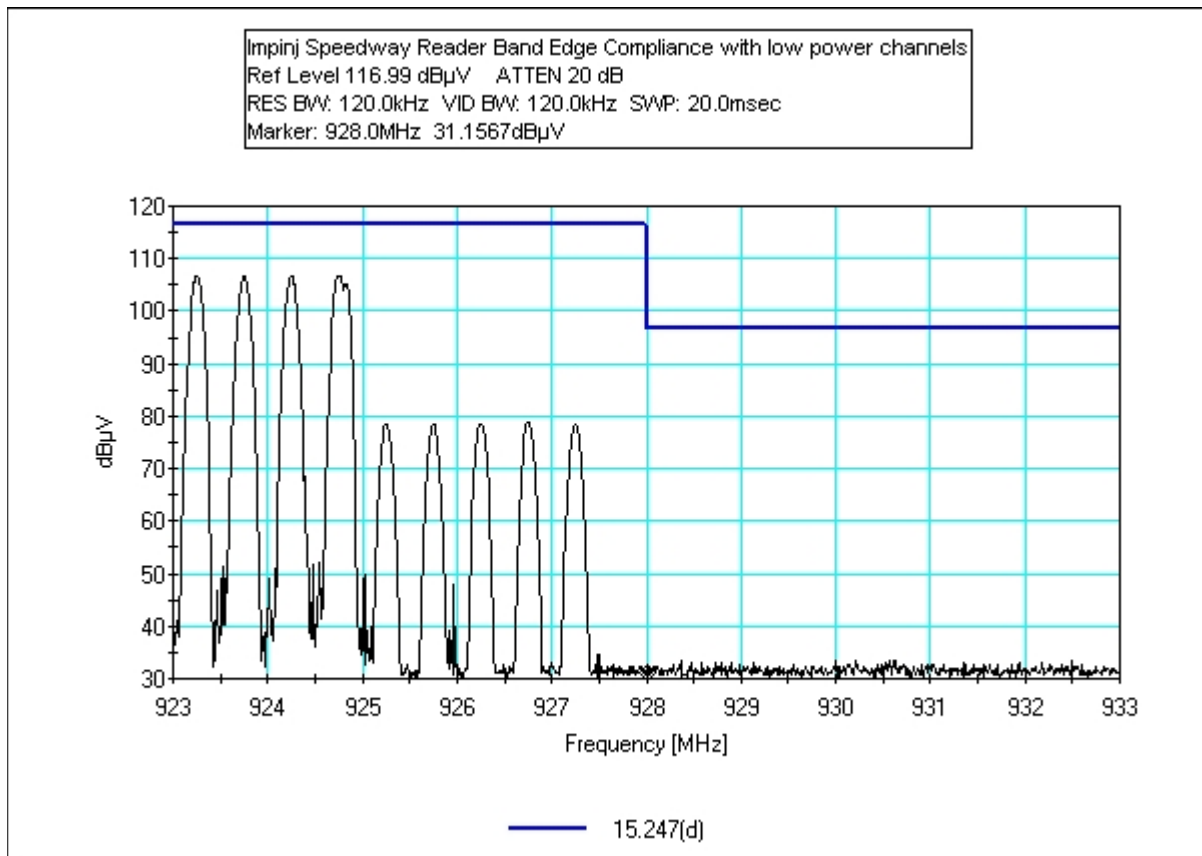

Tested by Randal Clark, 2007

BAND EDGE - HIGH CHANNEL HIGH POWER

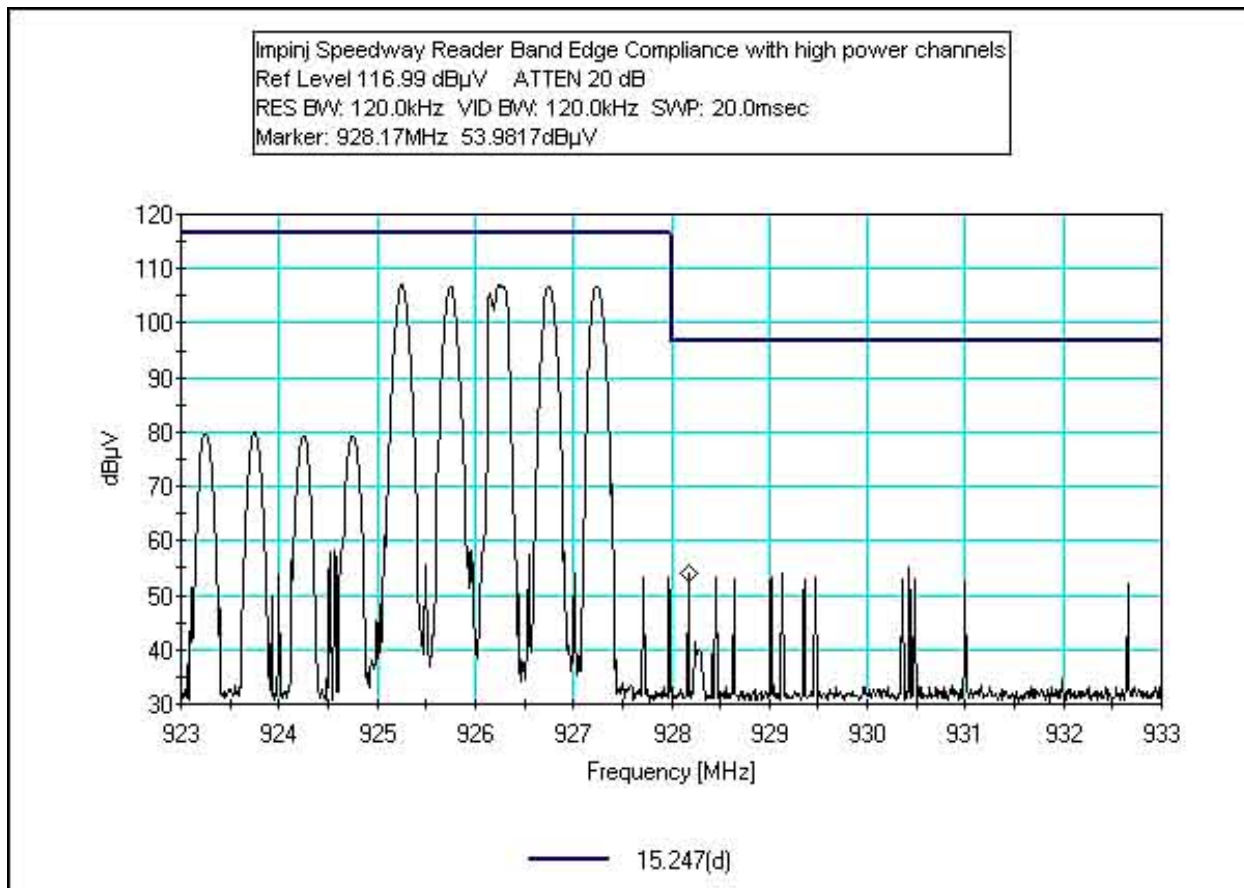


Tested by Randal Clark, 2007

FCC 15.247(d) BAND EDGE (Testing 2008)

Test Setup Photos




DRAFT

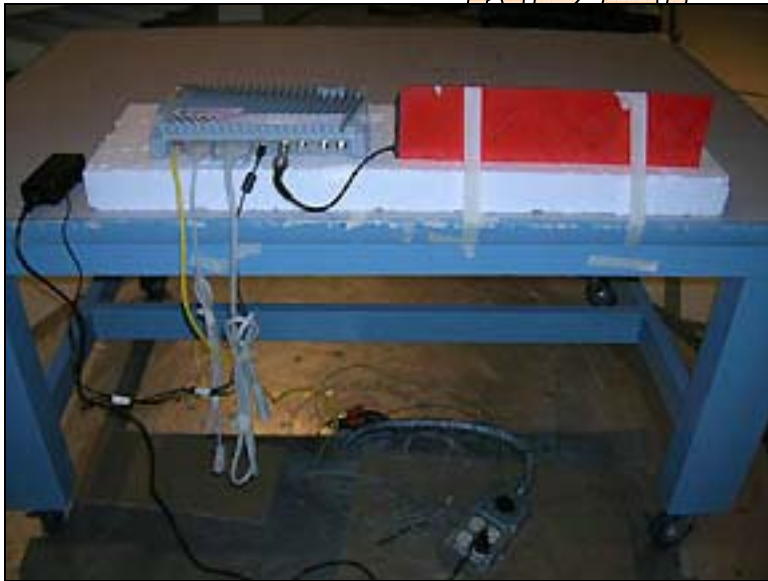




DRAFT

Test Plots
BANDEDGE 902.75MHz

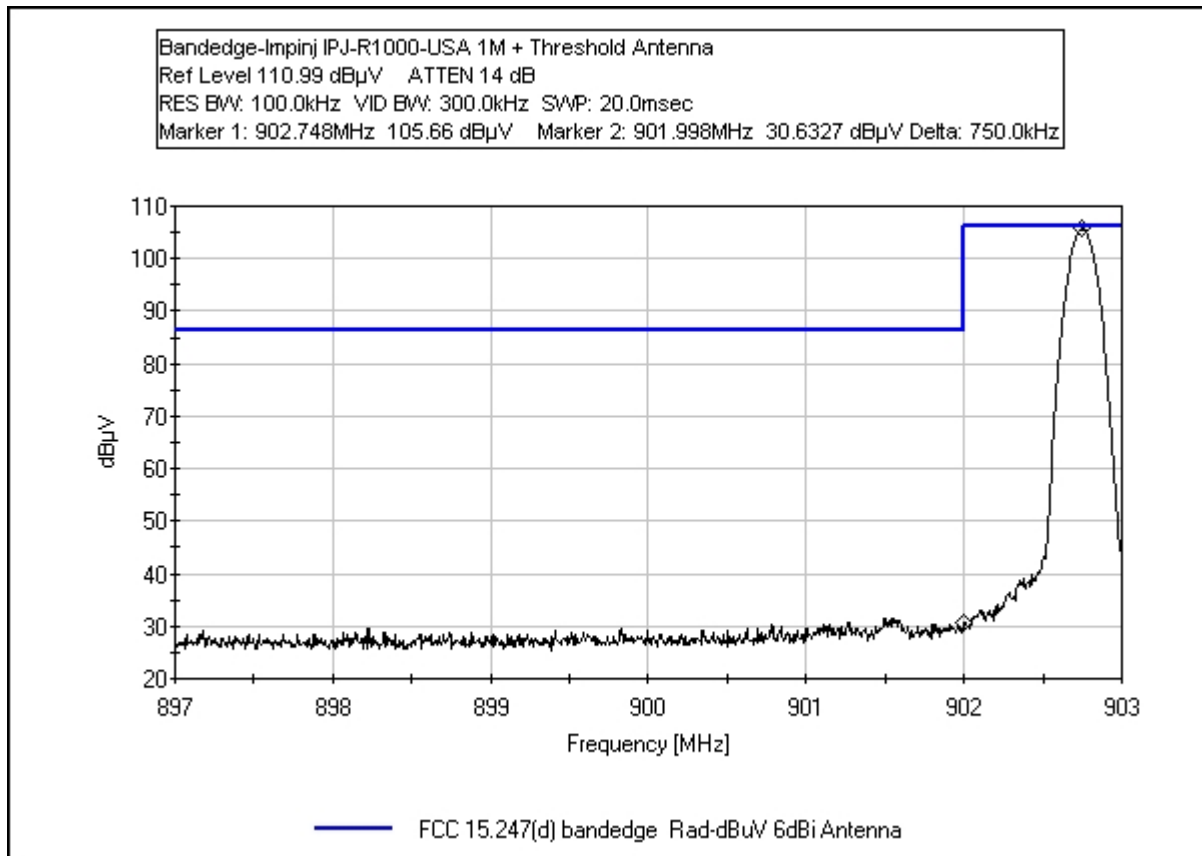

Tested by Art Rice, 2008

BANDEDGE 927.25MHz

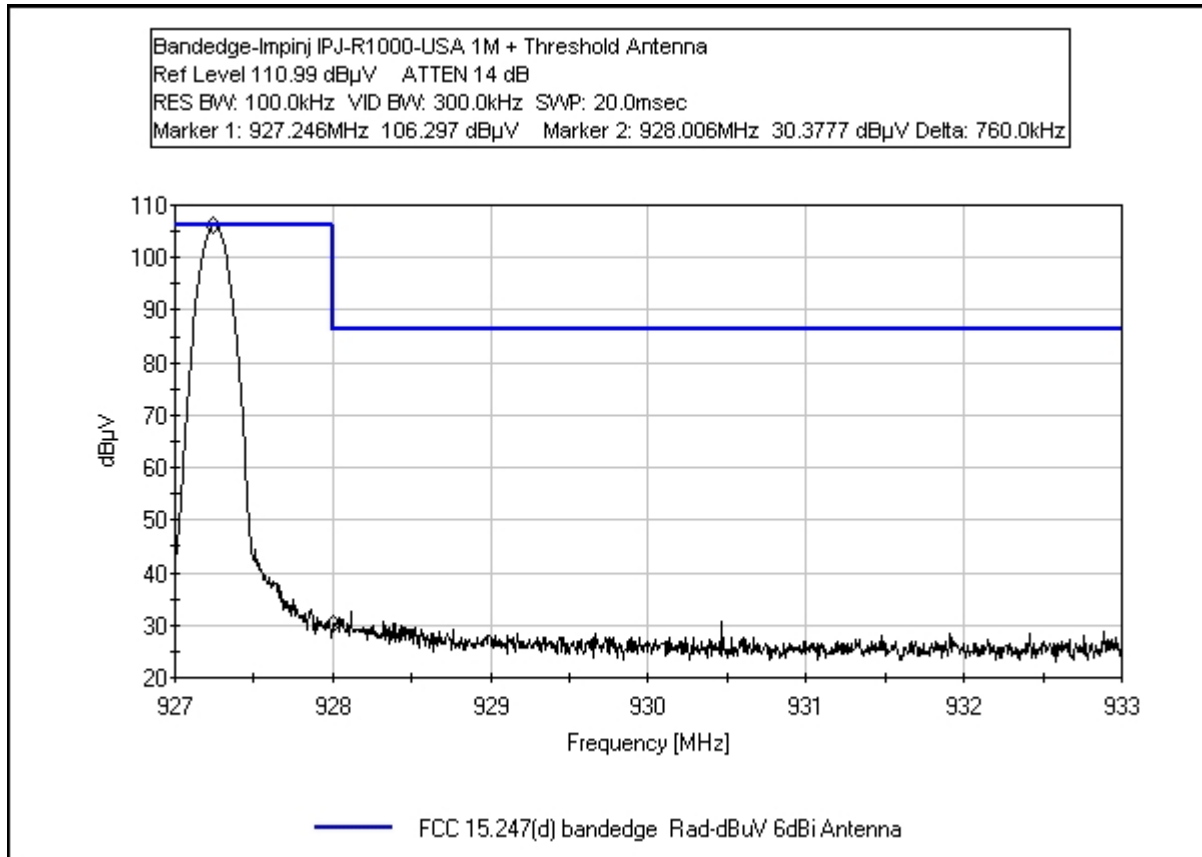

Tested by Art Rice, 2008

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510-249-1170

Customer: **Impinj, Inc.**
 Specification: **FCC 15.247(d) bandedge Rad-dBuV 6dBi Antenna**
 Work Order #: **83127** Date: 4/28/2008
 Test Type: **Maximized Emissions** Time: 19:01:34
 Equipment: **Antenna** Sequence#: 8
 Manufacturer: Impinj, Inc. Tested By: Art Rice
 Model: Threshold
 S/N: 04-28-08

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Antenna	2630	12/30/2006	12/30/2008	00852
E4446A Spectrum Analyzer	US44300408	03/05/2007	03/05/2009	02668
Cable	None	04/02/2007	04/02/2009	P05299
Cable	None	04/02/2007	04/02/2009	P05296
Cable	None	04/05/2007	04/05/2009	P05300

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Speedway UHF RFID Reader	Impinj, Inc.	IPJ-R1000/USA1M	40307140716
24VDC AC Adapter Antenna*	CUI Inc Impinj, Inc.	DSA-60W-20 Threshold	P/N: DTS240250UC-P11P-DB 04-28-08

Support Devices:

Function	Manufacturer	Model #	S/N
Laptop PC	Dell	Latitude D610	3KVZ671

Test Conditions / Notes:

Transmitting modulated carrier at full output power, 30 dBm modulated. Low Channel: 902.75 MHz, Mid Channel: 915.25 MHz, High Channel: 927.25 MHz. Measuring transmit radiated output and -20dBc band edge compliance. RBW = 100 kHz; VBW = 300 kHz.

Transducer Legend:

T1=ANT AN00852 25-1000MHz	T2=Cable Calibration ANP05296
T3=Cable Calibration ANP05299	T4=Cable Calibration ANP05300

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	927.246M	106.3	+23.1	+2.2	+0.2	+0.7	+0.0 201	132.5	132.5	+0.0	Vert 116
2	902.748M	105.7	+22.9	+2.2	+0.3	+0.8	+0.0 201	131.9	132.5	-0.6	Vert 116
3	901.998M	30.6	+22.9	+2.2	+0.3	+0.8	+0.0 201	56.8	112.5	-55.7	Vert 116
4	928.006M	30.4	+23.1	+2.2	+0.2	+0.7	+0.0 201	56.6	112.5	-55.9	Vert 116