



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Realtek Semiconductor Corp.
Applicant Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
FCC ID	TX2-RTL8723DE
Manufacturer's company	Realtek Semiconductor Corp.
Manufacturer Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Product Name	802.11 b/g/n RTL8723DE Combo module
Brand Name	REALTEK
Model Name	RTL8723DE
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2402 ~ 2480MHz
Received Date	Nov. 30, 2015
Final Test Date	May 05, 2016
Submission Type	Original Equipment

Statement

Test result included is only for the Bluetooth BR/EDR of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, DA-00705** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes	6
3.6. Table for Testing Locations.....	8
3.7. Table for Multiple List.....	9
3.8. Table for Supporting Units	10
3.9. Table for Parameters of Test Software Setting	11
3.10. EUT Operation during Test	11
3.11. Duty Cycle.....	11
3.12. Test Configurations	12
4. TEST RESULT	15
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. Maximum Conducted Output Power Measurement.....	19
4.3. Hopping Channel Separation Measurement	21
4.4. Number of Hopping Frequency Measurement.....	32
4.5. Dwell Time Measurement.....	34
4.6. Radiated Emissions Measurement	41
4.7. Emissions Measurement	72
4.8. Antenna Requirements	122
5. LIST OF MEASURING EQUIPMENTS	123
6. MEASUREMENT UNCERTAINTY.....	125
APPENDIX A. TEST PHOTOS	A1 ~ A18
APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....	B1 ~ B3




History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5D1601AB	Rev. 01	Initial issue of report	May 24, 2016

1. VERIFICATION OF COMPLIANCE

Product Name : 802.11 b/g/n RTL8723DE Combo module
Brand Name : REALTEK
Model No. : RTL8723DE
Applicant : Realtek Semiconductor Corp.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 30, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	13.15 dB
4.2	15.247(b)(1)	Maximum Conducted Output Power	Complies	15.18 dB
4.3	15.247(a)(1)	Hopping Channel Separation	Complies	-
4.4	15.247(b)(1)	Number of Hopping Frequency	Complies	-
4.5	15.247(a)(1)	Dwell Time	Complies	-
4.6	15.247(d)	Radiated Emissions	Complies	3.04 dB
4.7	15.247(d)	Band Edge Emissions	Complies	14.76 dB
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	From host system
Modulation	FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rate (Mbps)	GFSK: 1 ; $\pi/4$ -DQPSK: 2 ; 8DPSK: 3
Frequency Range	2402 ~ 2480MHz
Channel Number	79
Channel Band Width (99%)	BR (GFSK) 1 Mbps: 0.8915 MHz EDR ($\pi/4$ -DQPSK) 2 Mbps: 1.1950 MHz EDR (8DPSK) 3 Mbps: 1.1660 MHz
Maximum Conducted Peak Output Power	BR (GFSK) 1 Mbps: 5.82 dBm EDR ($\pi/4$ -DQPSK) 2 Mbps: 5.33 dBm EDR (8DPSK) 3 Mbps: 4.82 dBm
Maximum Conducted Average Output Power	BR (GFSK) 1 Mbps: 5.03 dBm EDR ($\pi/4$ -DQPSK) 2 Mbps: 4.54 dBm EDR (8DPSK) 3 Mbps: 4.03 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3
Note 1: Bluetooth BR uses a combination of GFSK (1Mbps).	
Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).	

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	LYNwave	ALA110-222050-300011	PIFA Antenna	I-PEX MHF4	3.5
2	PSA	RFDPA171320EMLB301	Dipole Antenna	I-PEX MHF4	3.14

Note: The EUT has two antennas.

For EUT 1 and EUT 3:

The EUT supports the antenna with TX/RX diversity function for WLAN and Bluetooth.

For WLAN 802.11b/g/n (1TX, 1RX) mode:

Both of Chain 1 and Chain 2 can be used as transmitting/receiving antennas, but only one antenna can be used as transmitting/receiving antenna at the one time. Chain 1 generated the worst case than Chain 2, so it is tested and recorded in the report.

For Bluetooth mode:

Base on WLAN's operation mode to select the other antenna to work.

(Ex. Assume Main port was selected to conduct transmitting function in WLAN, so AUX port was selected in Bluetooth Mode. Vice versa.)

Chain 2 generated the worst case than Chain 1, so it is tested and recorded in the report.

For EUT 2 and EUT 4:


For WLAN 802.11b/g/n (1TX, 1RX) mode:

Chain 1 can be used as transmitting/receiving antenna.


For Bluetooth mode:

Chain 1 can be used as transmitting/receiving antenna.


For EUT 1:

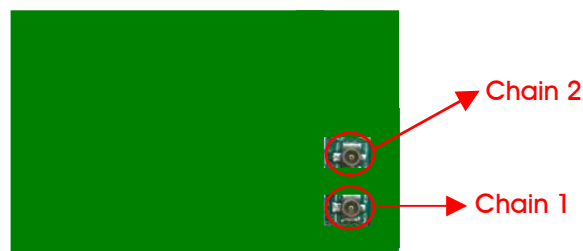


For EUT 3:

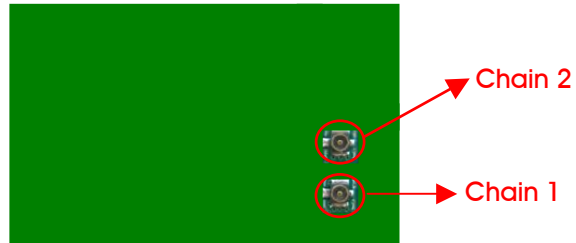

For EUT 2:

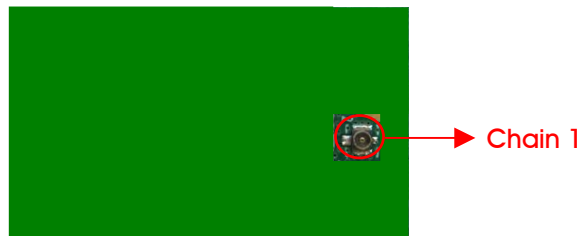

For EUT 4:

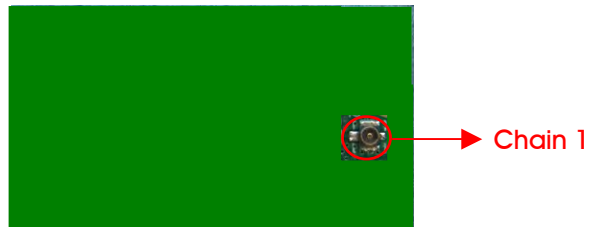

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	40	2442 MHz
	1	2403 MHz	:	:
	:	:	77	2479 MHz
	38	2440 MHz	78	2480 MHz
	39	2441 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	BR (GFSK)	1 Mbps	0/39/78	2
	EDR ($\pi/4$ -DQPSK)	2 Mbps	0/39/78	2
	EDR (8DPSK)	3 Mbps	0/39/78	2
Hopping Channel Separation	BR (GFSK)	1 Mbps	0~1 39~40 77~78	2
	EDR ($\pi/4$ -DQPSK)	2 Mbps	0~1 39~40 77~78	2
	EDR (8DPSK)	3 Mbps	0~1 39~40 77~78	2
Number of Hopping Frequency	EDR (8DPSK)	3 Mbps	0~78	2
Dwell Time	BR (GFSK) (DH1, DH3, DH5)	1 Mbps	0/39/78	2
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	BR (GFSK)	1 Mbps	0/39/78	For Mode 1, 2: 2 For Mode 3, 4: 1
	EDR (8DPSK)	3 Mbps	0/39/78	For Mode 1, 2: 2 For Mode 3, 4: 1
Band Edge Emissions	BR (GFSK)	1 Mbps	0/39/78	For Mode 1, 2: 2 For Mode 3, 4: 1
	EDR (8DPSK)	3 Mbps	0/39/78	For Mode 1, 2: 2 For Mode 3, 4: 1

Note 1: For Conducted measurement Test: only the higher gain antenna “Ant. 1” was selected to perform the test and recorded in this report.

Note 2: For Radiated measurement Test: all test results were recorded in the report.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT 1-E key-Diversity + Antenna 1

Mode 2. EUT 2-E key-Fixed + Antenna 1

Mode 3. EUT 3-A+E key-Diversity + Antenna 1

Mode 4. EUT 4-A+E key-Fixed + Antenna 1

Mode 1 has been evaluated to be the worst case between Mode 1~2 thus measurement for Mode 5 will follow this same test mode.

Mode 3 has been evaluated to be the worst case between Mode 3~4 thus measurement for Mode 6 will follow this same test mode.

Mode 5. EUT 1-E key-Diversity + Antenna 2

Mode 6. EUT 3-A+E key-Diversity + Antenna 2

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission test <Below 1GHz>:

Mode 1. Place EUT 1-E key-Diversity in Y axis + Antenna 1

Mode 2. Place EUT 1-E key-Diversity in Z axis + Antenna 1

Mode 3. Place EUT 2-E key-Fixed in Y axis + Antenna 1

Mode 4. Place EUT 2-E key-Fixed in Z axis + Antenna 1

Mode 5. Place EUT 3-A+E key-Diversity in Y axis + Antenna 1

Mode 6. Place EUT 3-A+E key-Diversity in Z axis + Antenna 1

Mode 7. Place EUT 4-A+E key-Fixed in Y axis + Antenna 1

Mode 8. Place EUT 4-A+E key-Fixed in Z axis + Antenna 1

Mode 2 has been evaluated to be the worst case between Mode 1~4 thus measurement for Mode 9 will follow this same test mode.

Mode 6 has been evaluated to be the worst case between Mode 5~8 thus measurement for Mode 10 will follow this same test mode.

Mode 9. Place EUT 1-E key-Diversity in Z axis + Antenna 2

Mode 10. Place EUT 3-A+E key-Diversity in Z axis + Antenna 2

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission test <Above 1GHz>:

The EUT can be placed in X axis, Y axis and Z axis. After evaluating, Z axis was the worst case, so it's recorded in this report.

Mode 1. Place EUT 1-E key-Diversity in Z axis + Antenna 1

Mode 2. Place EUT 1-E key-Diversity in Z axis + Antenna 2

Mode 3. Place EUT 2-E key-Fixed in Z axis + Antenna 1

Mode 4. Place EUT 2-E key-Fixed in Z axis + Antenna 2

For Radiated Emission Co-location test:

Mode 1. Place EUT 1-E key-Diversity in X axis + Antenna 1

Mode 2. Place EUT 1-E key-Diversity in Y axis + Antenna 1

Mode 3. Place EUT 1-E key-Diversity in Z axis + Antenna 1

Mode 4. Place EUT 2-E key-Fixed in X axis + Antenna 1

Mode 5. Place EUT 2-E key-Fixed in Y axis + Antenna 1

Mode 6. Place EUT 2-E key-Fixed in Z axis + Antenna 1

Mode 3 has been evaluated to be the worst case between Mode 1~3 thus measurement for Mode 7 will follow this same test mode.

Mode 6 has been evaluated to be the worst case between Mode 4~6 thus measurement for Mode 8 will follow this same test mode.

Mode 7. Place EUT 1-E key-Diversity in Z axis + Antenna 2

Mode 8. Place EUT 2-E key-Fixed in Z axis + Antenna 2

Mode 3 is the worst case, so it was selected to record in this test report.

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and Bluetooth function; therefore Co-location Maximum Permissible Exposure (Please refer to FA5D1601) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and Bluetooth function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple List

The EUT has four types which are identical to each other in all aspects except for the following table:

Model Name	EUT	Interface		Function	
		E key	A+E key	Diversity	Fixed
RTL8723DE	1	V		V	
	2	V			V
	3		V	V	
	4		V		V

Interface	Description
E key	There are two interface for different platform connector, all the RF circuit and electric identity are the same.
A+E key	

Note:

For Conducted Emission test and Radiated Emission test<Below 1GHz>:

The table above, EUT 1 ~ EUT 4 was selected as representative model for the test and its data was recorded in this report.

For Radiated Emission test<Above 1GHz> and Radiated Emission Co-location test:

The above difference does not affect the test result of RF tests, so only EUT 1 and EUT 2 was tested and recorded in this report.

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB<Below 1GHz>

Support Unit	Brand	Model	FCC ID
AP	Netgear	R6300V2	PY313200227
NB*2	DELL	E4300	DoC
Device	REALTEK	RTL8723DE	TX2-RTL8723DE
Test fixture	REALTEK	Ameba adapter	N/A
Earphone	SHYARO CHI	MIC-04	N/A
Mouse	Logitech	M-U0026	DoC

For Test Site No: 03CH01-CB<Above1GHz>

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
Test fixture	REALTEK	Ameba adapter	N/A

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
AP	Planex	GW-AP54SGX	KA220030603014-1
NB*2	DELL	E6430	DoC
Device	REALTEK	RTL8723DE	TX2-RTL8723DE
Test fixture	REALTEK	Ameba adapter	N/A
Earphone	SHYARO CHI	MIC-04	N/A
Mouse	HP	FM100	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
Test fixture	REALTEK	Ameba adapter	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of Bluetooth

For BR (GFSK) 1 Mbps:

Test Software Version	Bluetooth MP Tool		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	default	default	default

For EDR ($\pi/4$ -DQPSK) 2 Mbps:

Test Software Version	Bluetooth MP Tool		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	default	default	default

For EDR (8DPSK) 3 Mbps:

Test Software Version	Bluetooth MP Tool		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	default	default	default

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
BR (GFSK)	5.600	100.000	5.60%	12.52	0.18
EDR ($\pi/4$ -DQPSK)	5.600	100.000	5.60%	12.52	0.18
EDR (8DPSK)	5.600	100.000	5.60%	12.52	0.18

3.12. Test Configurations


3.12.1. AC Power Line Conduction Emissions Test Configuration

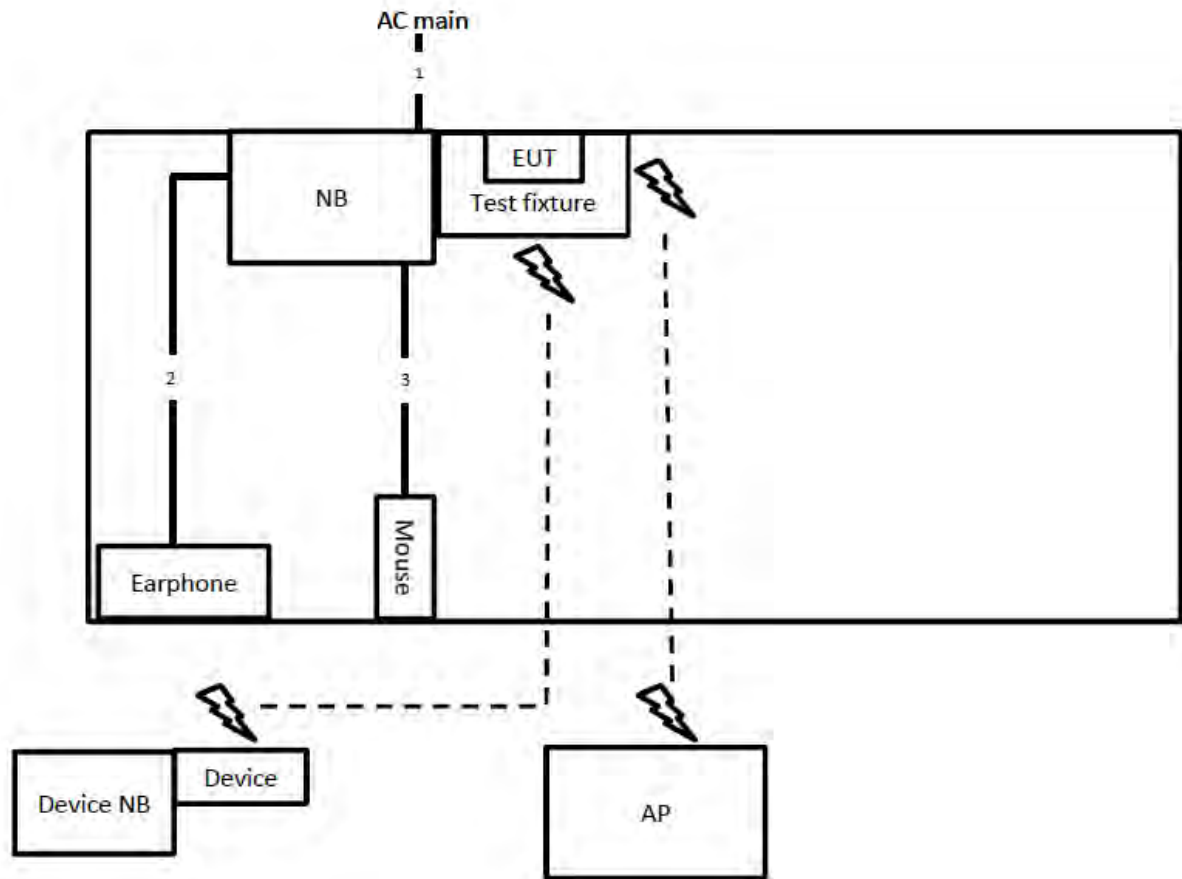

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	Audio cable	No	1.1m
3	USB cable	Yes	1.8m


3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

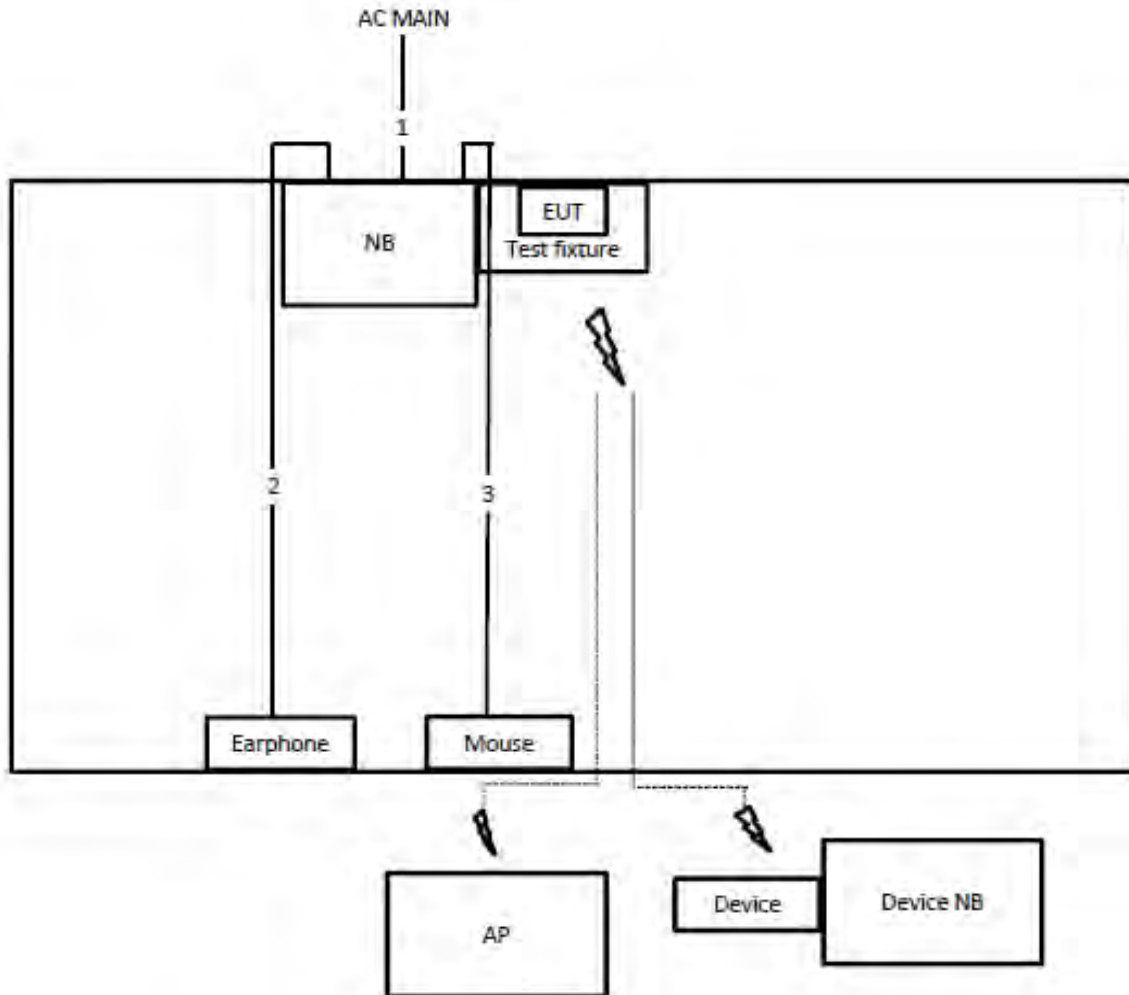

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	Audio cable	No	1.1m
3	USB cable	Yes	1.8m

Test Configuration: above 1GHz

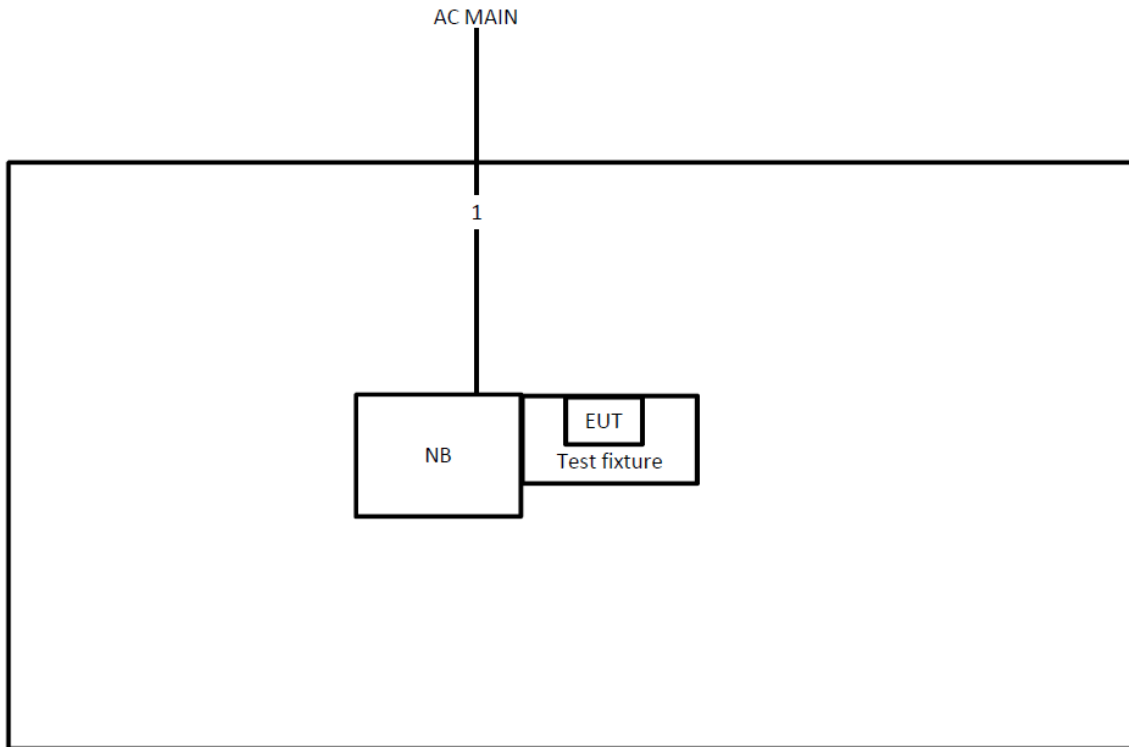

Item	Connection	Shielded	Length
1	Power cable	No	2.6m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

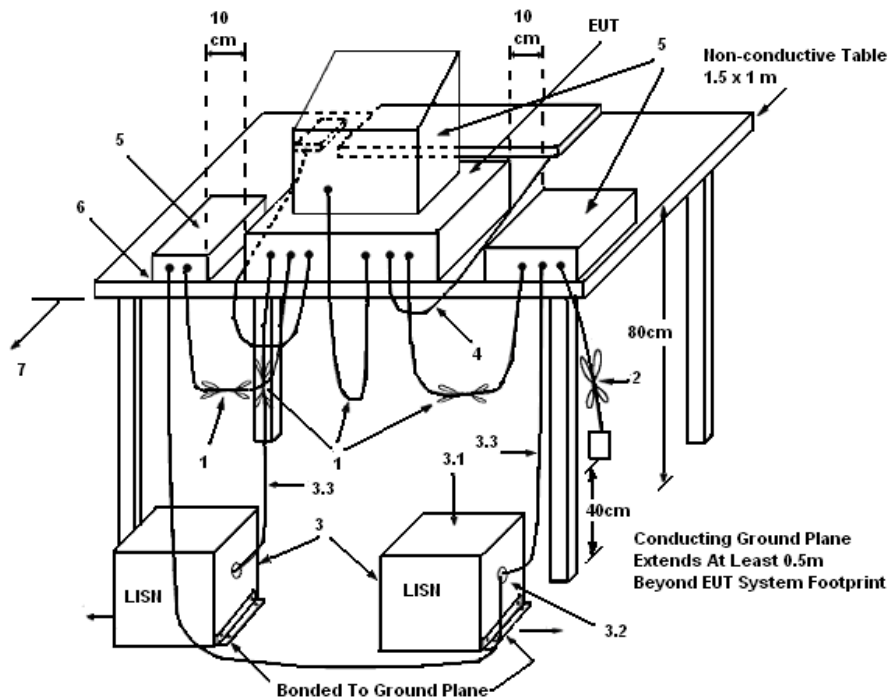

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	58%
Test Engineer	Deven Huang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

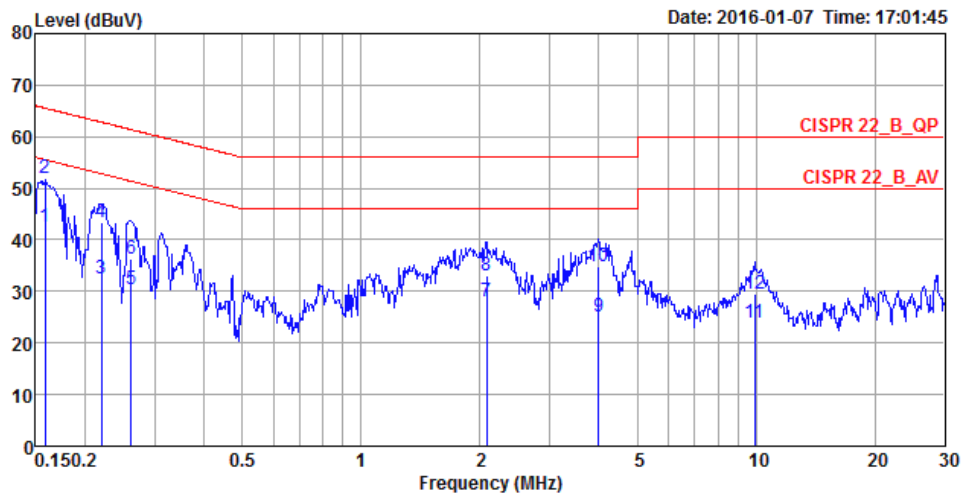

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1582	42.41	-13.15	55.56	32.46	9.93	0.02	LINE	Average
2	0.1582	51.91	-13.65	65.56	41.96	9.93	0.02	LINE	QP
3	0.2197	32.54	-20.29	52.83	22.59	9.93	0.02	LINE	Average
4	0.2197	43.37	-19.46	62.83	33.42	9.93	0.02	LINE	QP
5	0.2616	30.44	-20.94	51.38	20.48	9.93	0.03	LINE	Average
6	0.2616	36.28	-25.10	61.38	26.32	9.93	0.03	LINE	QP
7	2.0768	28.07	-17.93	46.00	18.02	9.99	0.06	LINE	Average
8	2.0768	33.01	-22.99	56.00	22.96	9.99	0.06	LINE	QP
9	3.9850	25.08	-20.92	46.00	14.99	10.02	0.07	LINE	Average
10	3.9850	34.76	-21.24	56.00	24.67	10.02	0.07	LINE	QP
11	9.9130	23.87	-26.13	50.00	13.44	10.18	0.25	LINE	Average
12	9.9130	29.38	-30.62	60.00	18.95	10.18	0.25	LINE	QP

Temperature	22°C	Humidity	58%
Test Engineer	Deven Huang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1

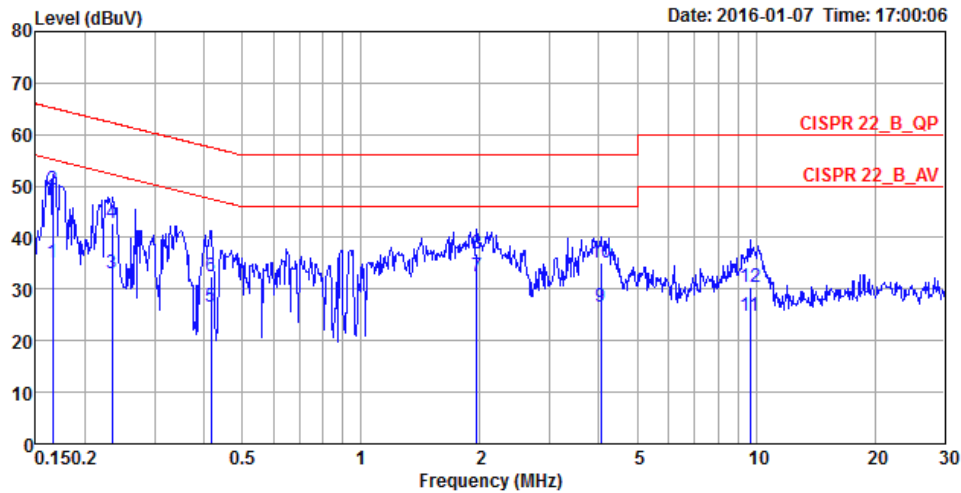

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1659	35.03	-20.13	55.16	25.23	9.78	0.02	NEUTRAL	Average
2	0.1659	49.40	-15.76	65.16	39.60	9.78	0.02	NEUTRAL	QP
3	0.2341	33.20	-19.10	52.30	23.38	9.79	0.03	NEUTRAL	Average
4	0.2341	42.78	-19.52	62.30	32.96	9.79	0.03	NEUTRAL	QP
5	0.4171	26.69	-20.82	47.51	16.86	9.79	0.04	NEUTRAL	Average
6	0.4171	32.50	-25.01	57.51	22.67	9.79	0.04	NEUTRAL	QP
7	1.9593	32.51	-13.49	46.00	22.61	9.84	0.06	NEUTRAL	Average
8	1.9593	36.86	-19.14	56.00	26.96	9.84	0.06	NEUTRAL	QP
9	4.0489	26.70	-19.30	46.00	16.76	9.87	0.07	NEUTRAL	Average
10	4.0489	35.10	-20.90	56.00	25.16	9.87	0.07	NEUTRAL	QP
11	9.6539	24.85	-25.15	50.00	14.61	10.00	0.24	NEUTRAL	Average
12	9.6539	30.50	-29.50	60.00	20.26	10.00	0.24	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (21dBm).

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak and Average

4.2.3. Test Procedures

This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout



4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	24°C	Humidity	60%
Test Engineer	Andy Tsai	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK
Test Date	Feb. 17, 2016		

For BR (GFSK) 1 Mbps:

Channel	Frequency	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	5.71	4.92	21.00	Complies
39	2441 MHz	5.82	5.03	21.00	Complies
78	2480 MHz	5.57	4.78	21.00	Complies

For EDR ($\pi/4$ -DQPSK) 2 Mbps:

Channel	Frequency	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	5.07	4.28	21.00	Complies
39	2441 MHz	5.33	4.54	21.00	Complies
78	2480 MHz	5.19	4.40	21.00	Complies

For EDR (8DPSK) 3 Mbps:

Channel	Frequency	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	4.61	3.82	21.00	Complies
39	2441 MHz	4.82	4.03	21.00	Complies
78	2480 MHz	4.65	3.86	21.00	Complies

4.3. Hopping Channel Separation Measurement

4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VBW	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilized for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized for channel separation measurement.

4.3.4. Test Setup Layout

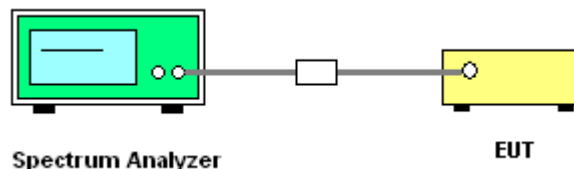

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Hopping Channel Separation

Temperature	24°C	Humidity	60%
Test Engineer	Andy Tsai	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK

For BR (GFSK) 1 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	1.0261	0.8915	1.00	0.684	Complies
2441 MHz	1.0290	0.8915	1.00	0.686	Complies
2480 MHz	1.0320	0.8915	1.00	0.688	Complies

Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For EDR ($\pi/4$ -DQPSK) 2 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	1.3540	1.1950	1.00	0.903	Complies
2441 MHz	1.3450	1.1950	1.00	0.897	Complies
2480 MHz	1.3450	1.1950	1.00	0.897	Complies


Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For EDR (8DPSK) 3 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	1.2930	1.1660	1.00	0.862	Complies
2441 MHz	1.2930	1.1660	1.00	0.862	Complies
2480 MHz	1.2960	1.1660	1.00	0.864	Complies


Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 0 / 2402 MHz

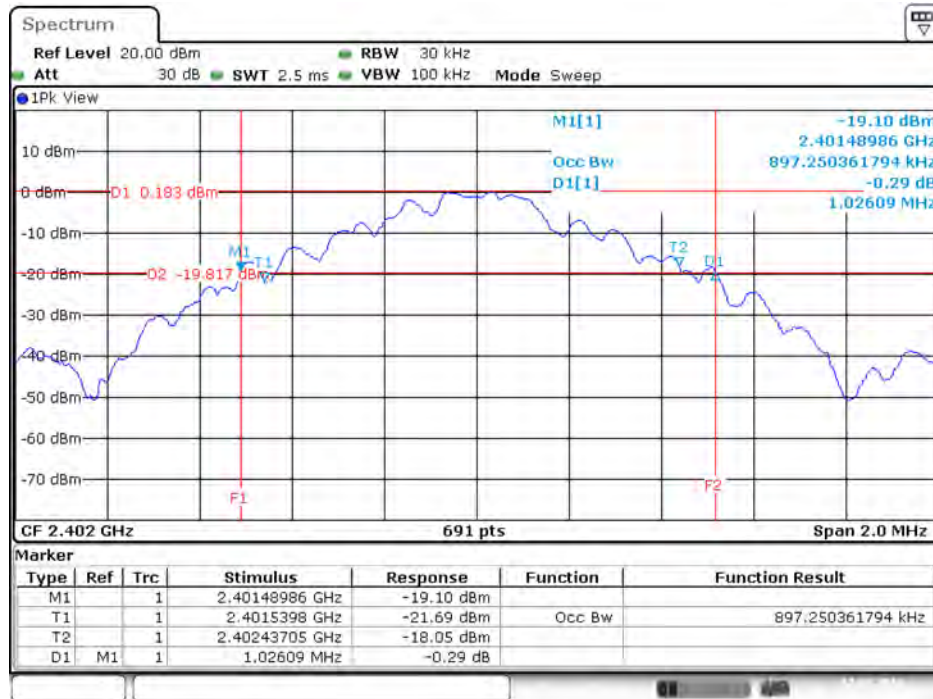


Date: 17.FEB.2016 14:37:09

20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 39 / 2441 MHz

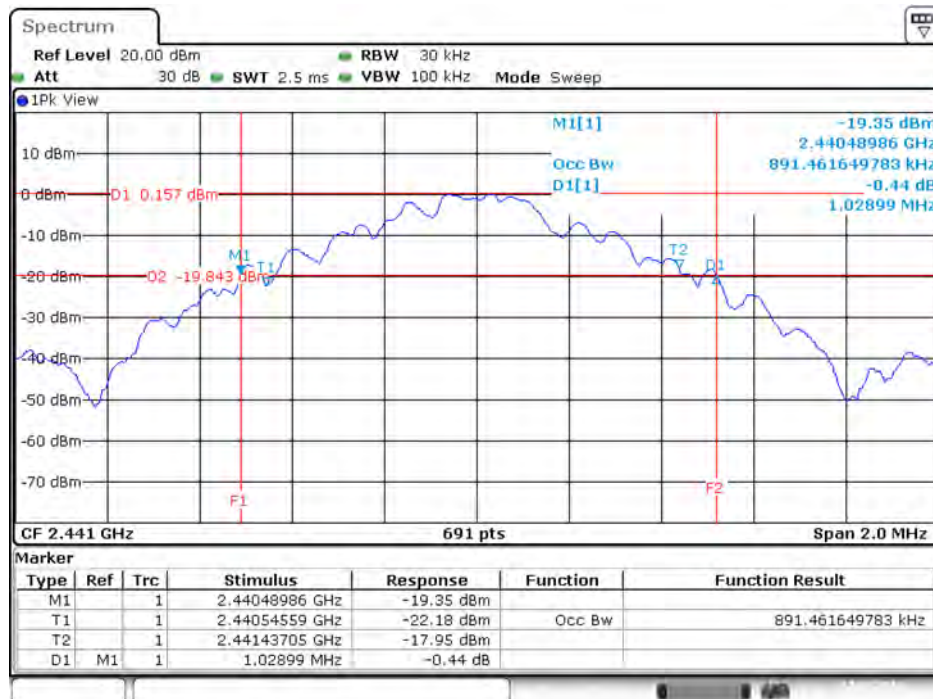


Date: 17.FEB.2016 14:39:24

20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 78 / 2480 MHz

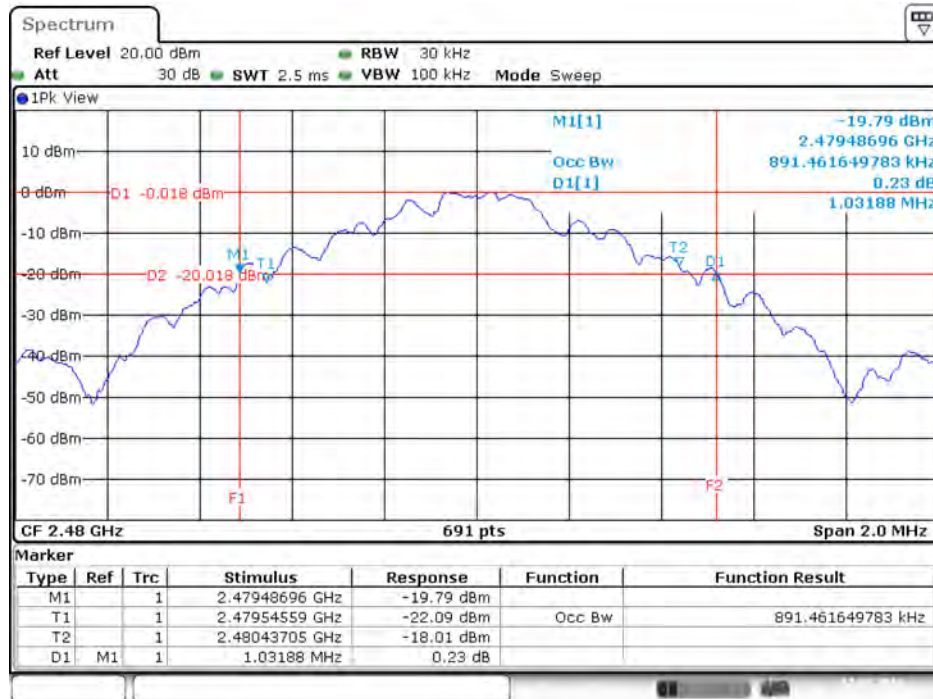


Date: 17.FEB.2016 14:41:05

Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz

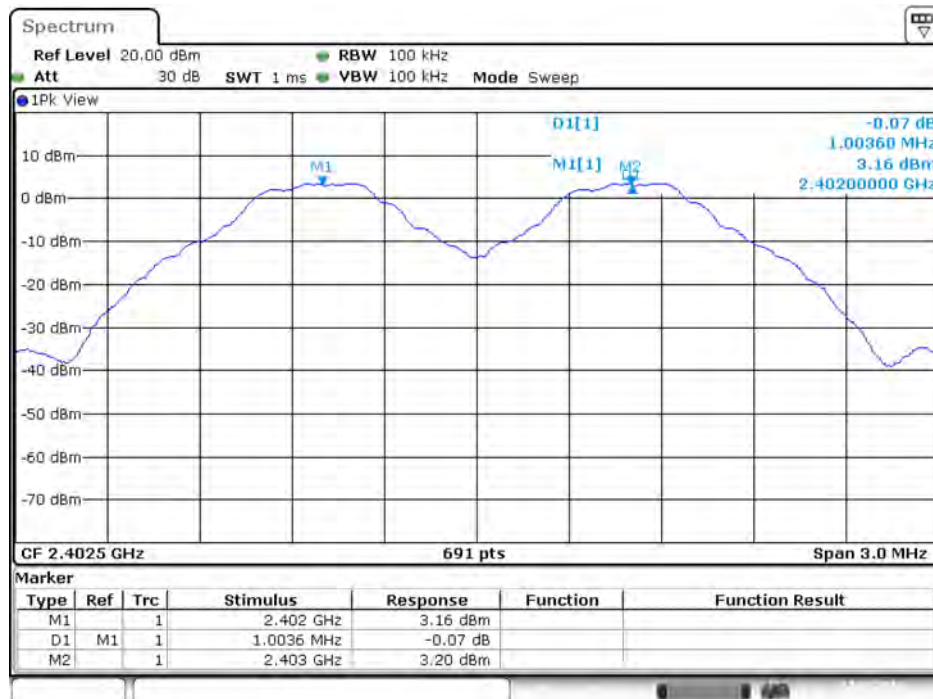


Date: 17.FEB.2016 15:00:54

Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz

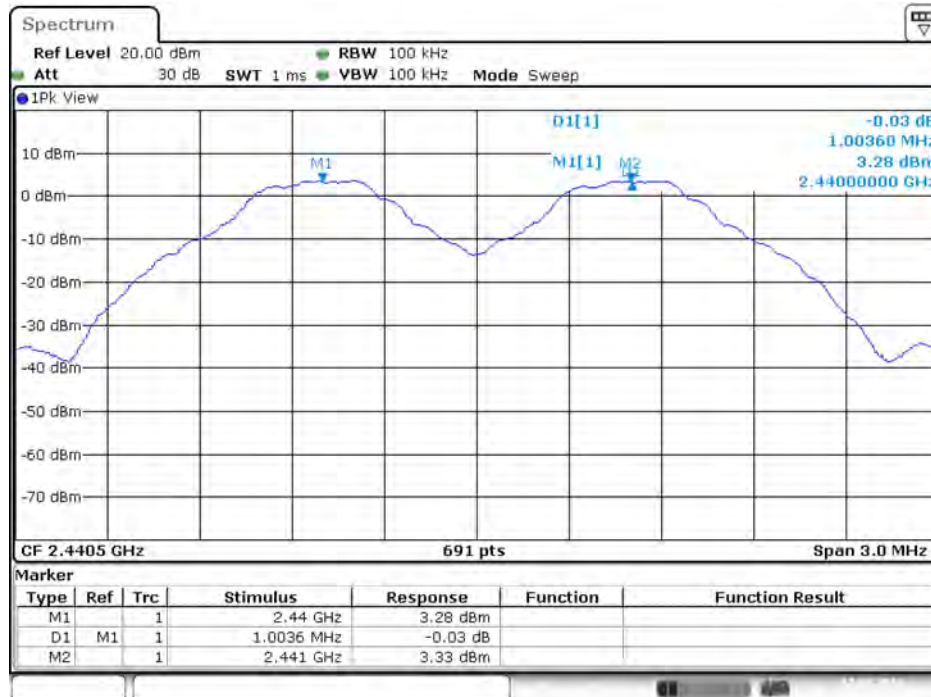


Date: 17.FEB.2016 15:03:06

Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz

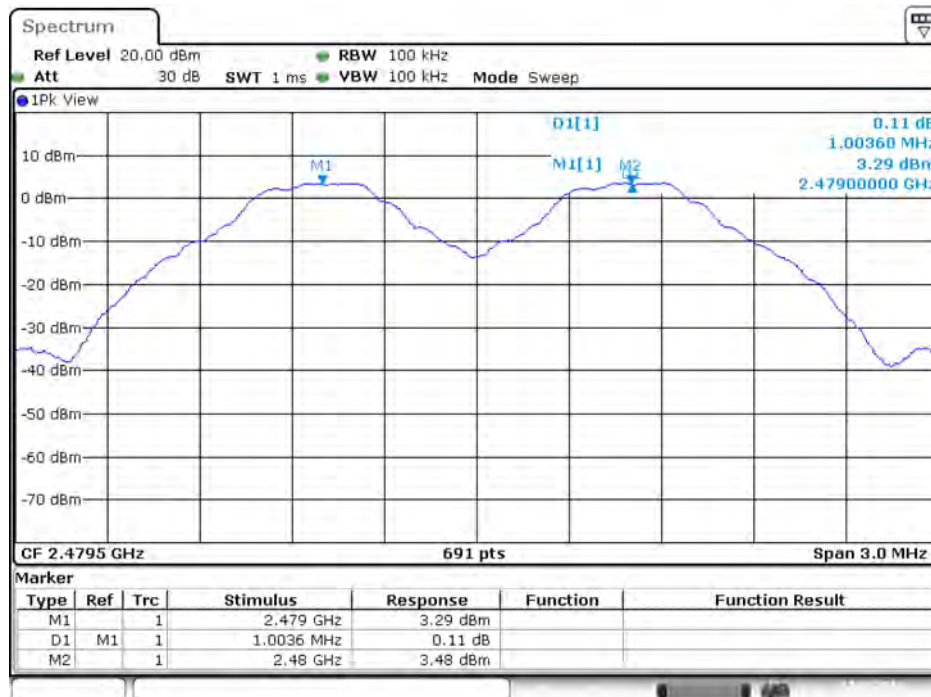


Date: 17.FEB.2016 15:04:52

20 dB Bandwidth Plot on EDR ($\pi/4$ -DQPSK) 2 Mbps / Channel 0 / 2402 MHz

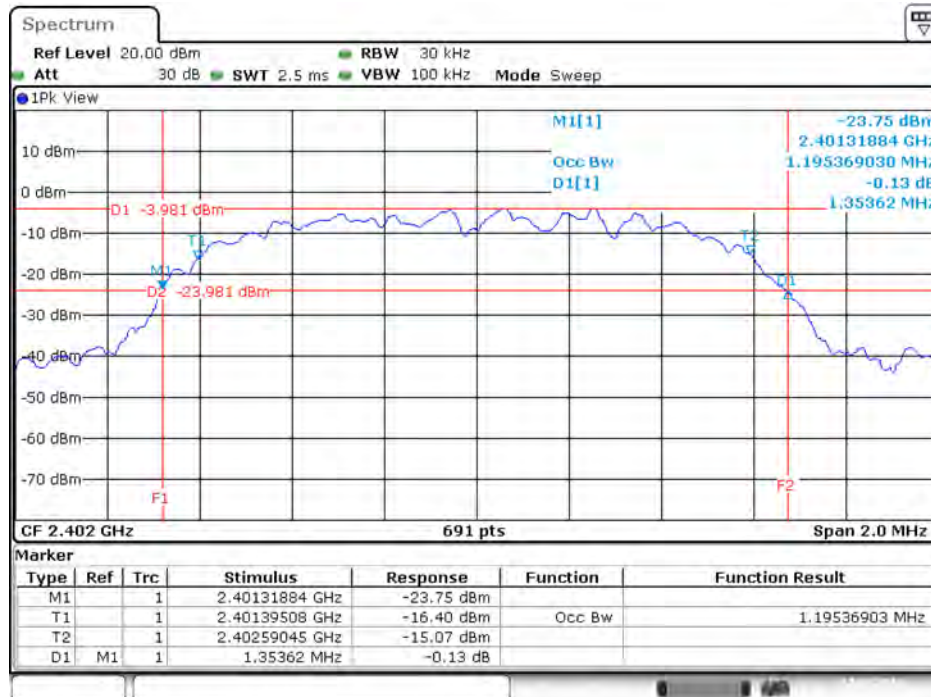


Date: 17.FEB.2016 14:43:11

20 dB Bandwidth Plot on EDR ($\pi/4$ -DQPSK) 2 Mbps / Channel 39 / 2441 MHz

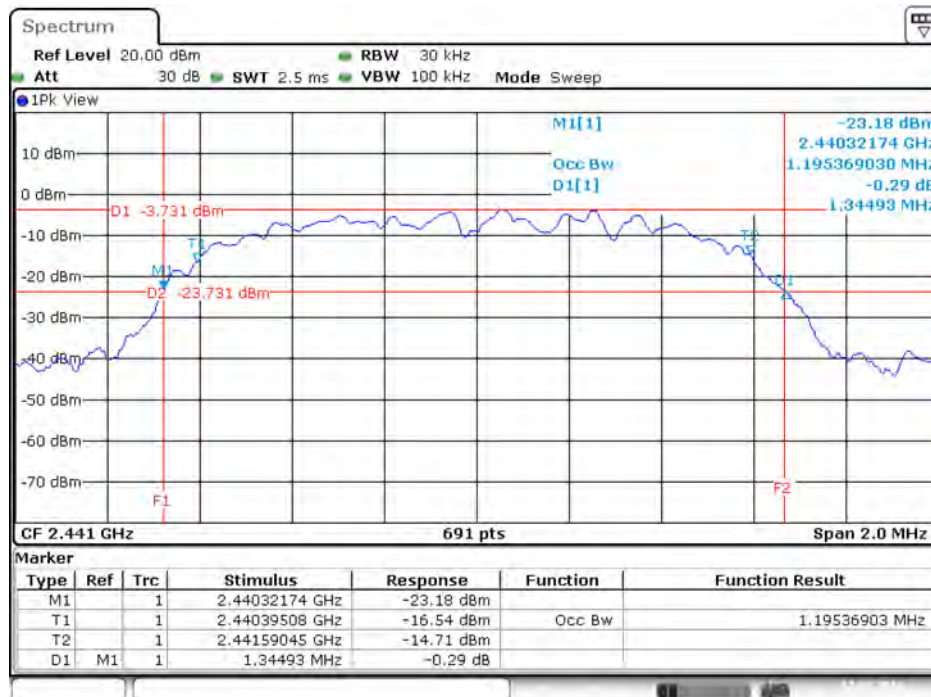


Date: 17.FEB.2016 14:42:37

20 dB Bandwidth Plot on EDR ($\pi/4$ -DQPSK) 2 Mbps / Channel 78 / 2480 MHz

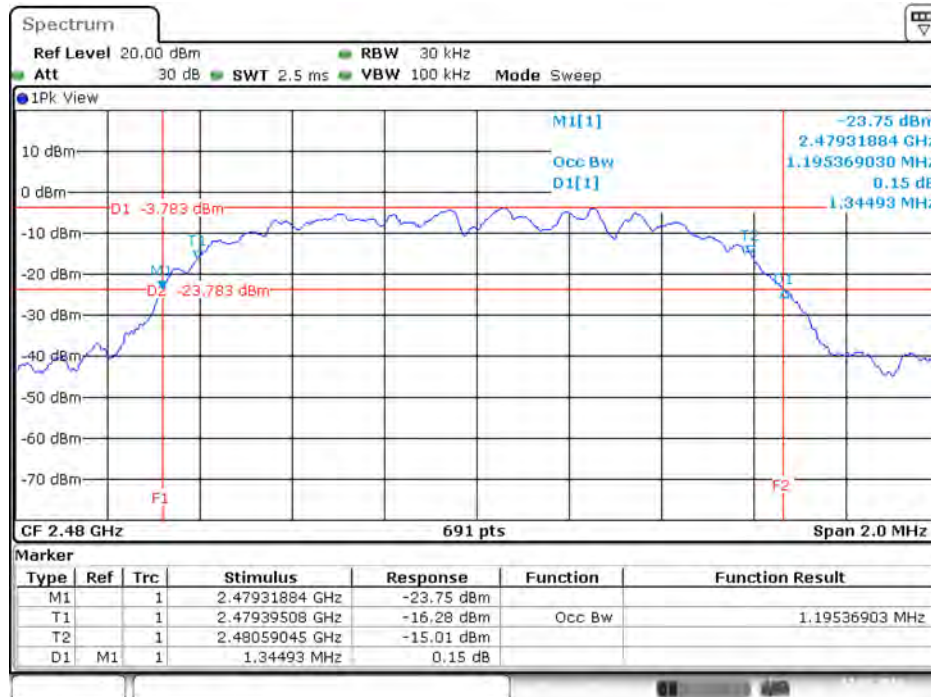


Date: 17.FEB.2016 14:41:44

Channel Separation Plot on EDR ($\pi/4$ -DQPSK) 2 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz

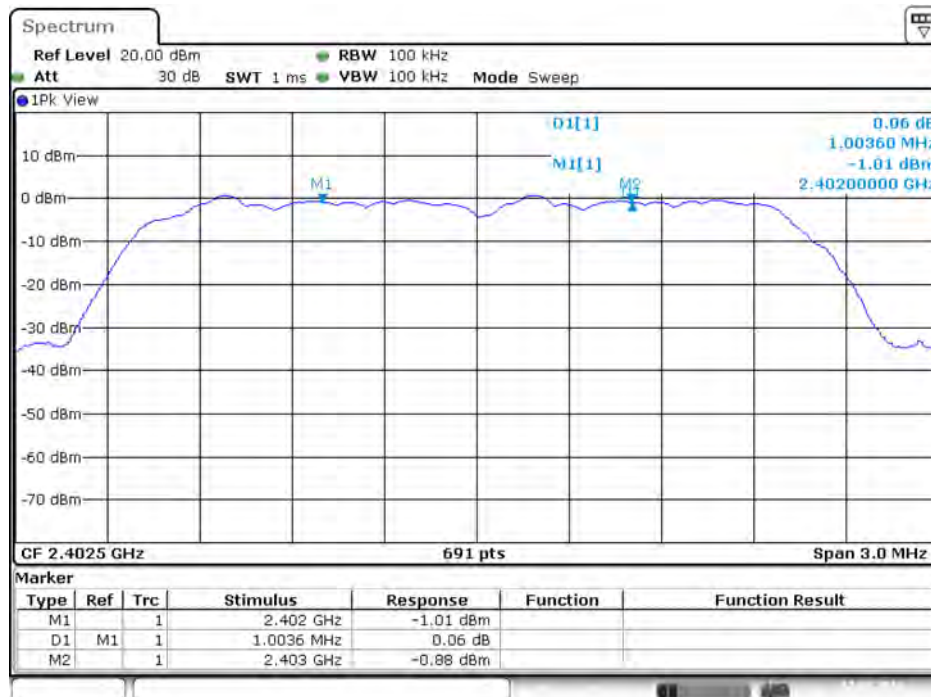


Date: 17.FEB.2016 15:09:30

Channel Separation Plot on EDR ($\pi/4$ -QPSK) 2 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz

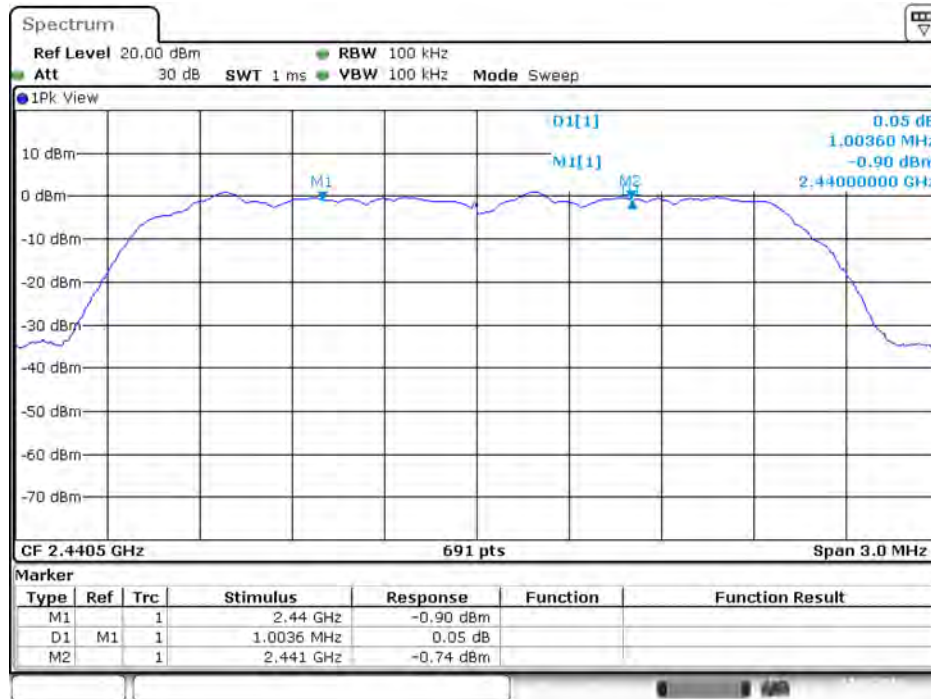


Date: 17.FEB.2016 15:08:31

Channel Separation Plot on EDR ($\pi/4$ -QPSK) 2 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz

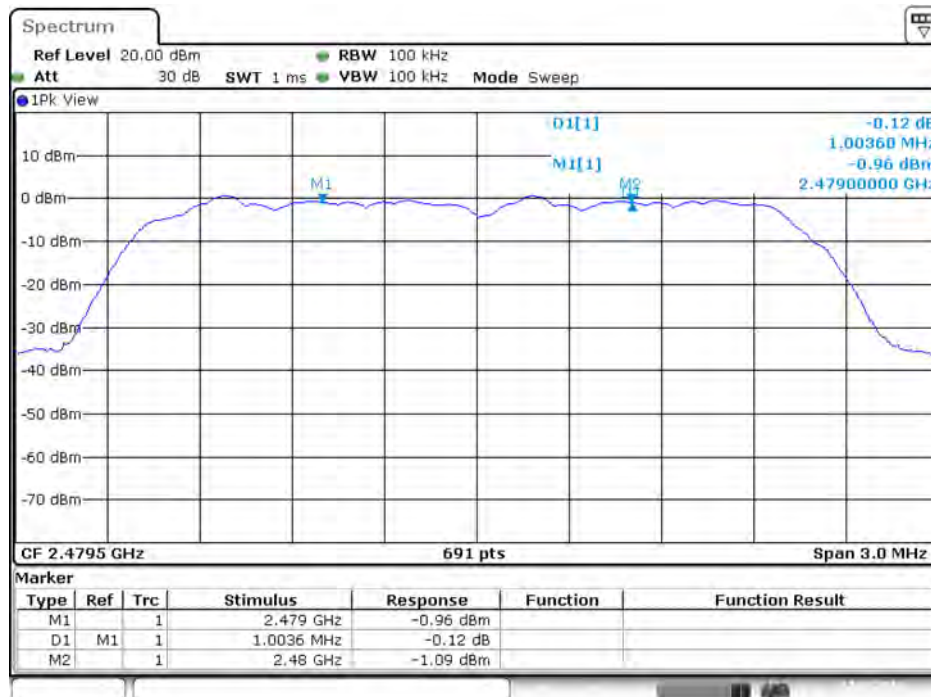


Date: 17.FEB.2016 15:07:29

20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 0 / 2402 MHz

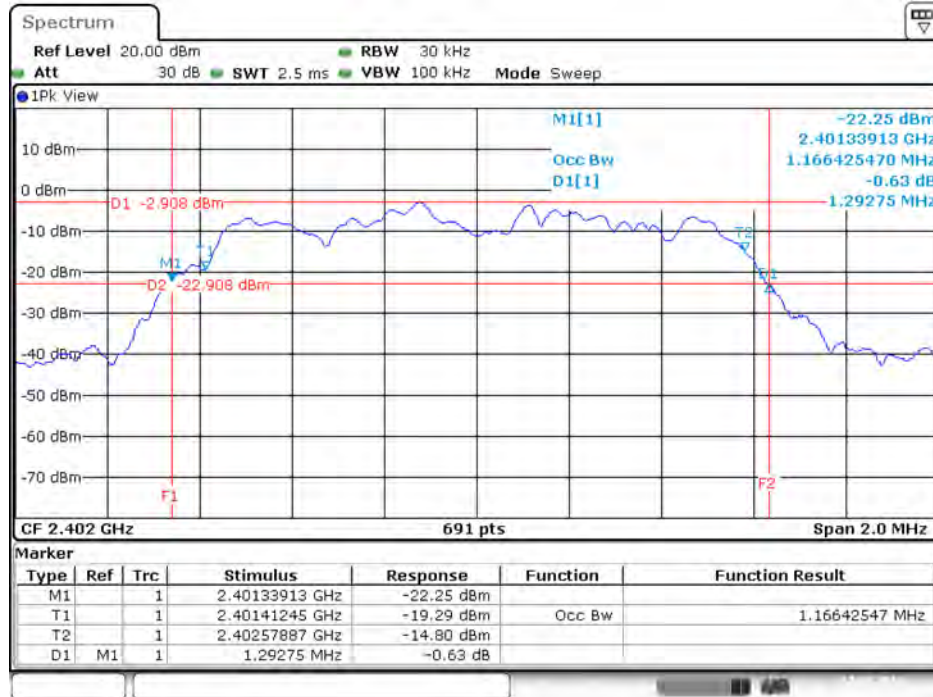


Date: 17.FEB.2016 14:43:58

20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 39 / 2441 MHz

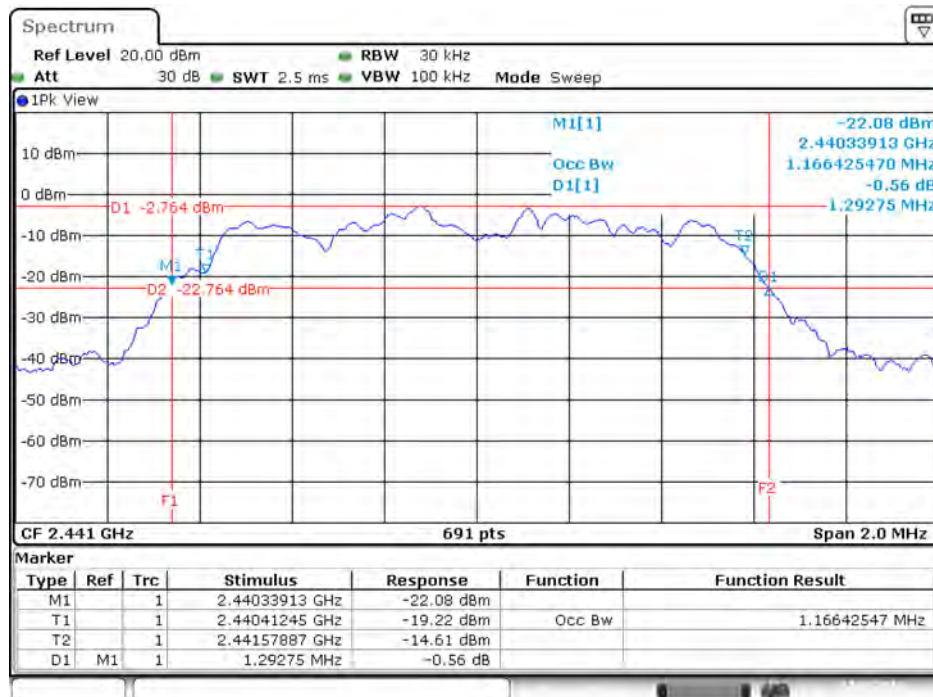


Date: 17.FEB.2016 14:44:37

20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 78 / 2480 MHz

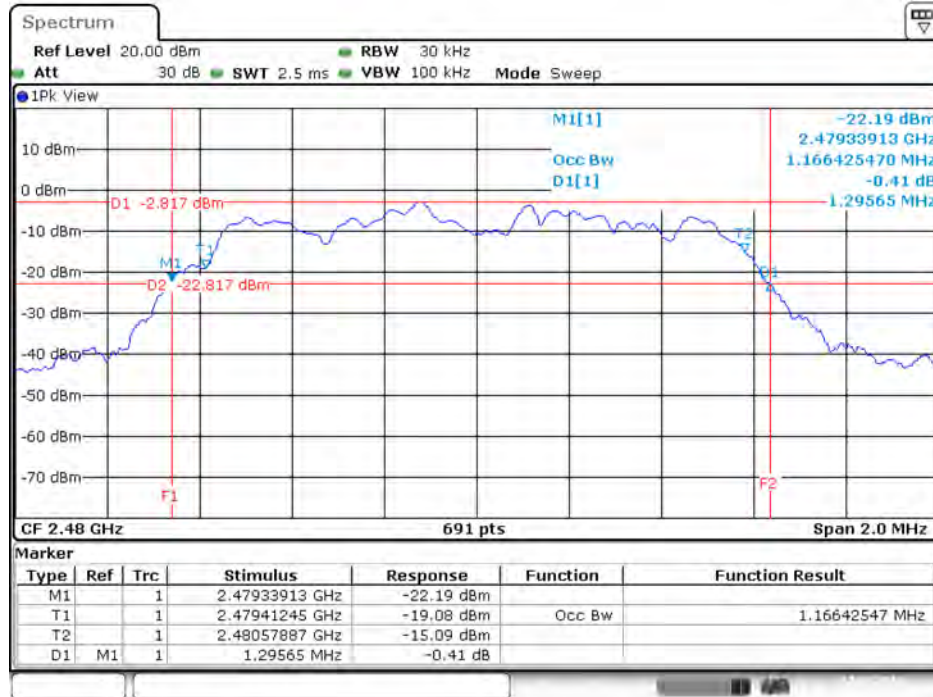


Date: 17.FEB.2016 14:45:15

Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz

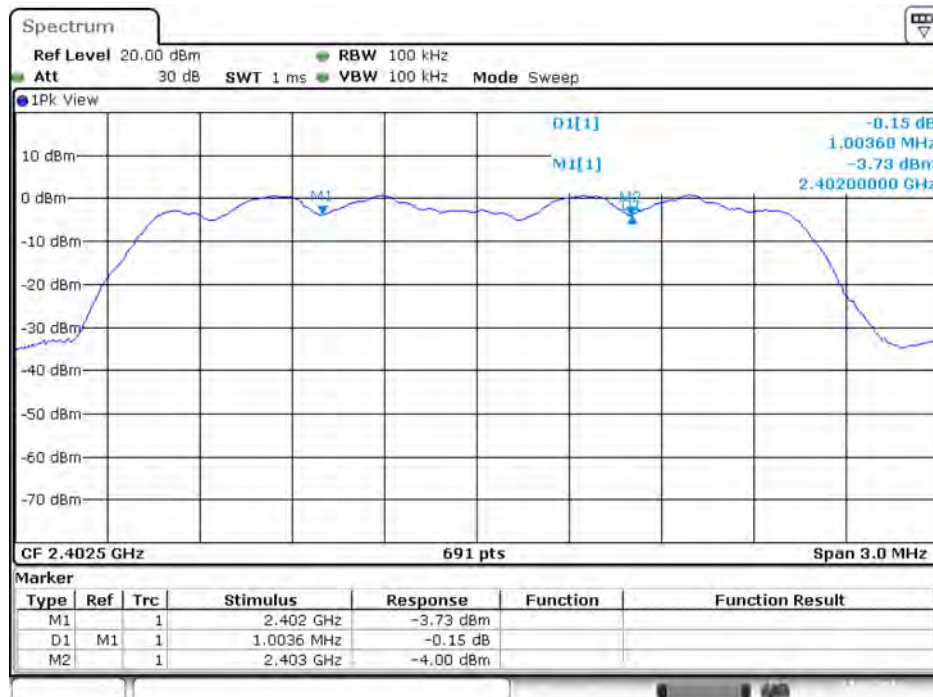


Date: 17.FEB.2016 15:10:34

Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz

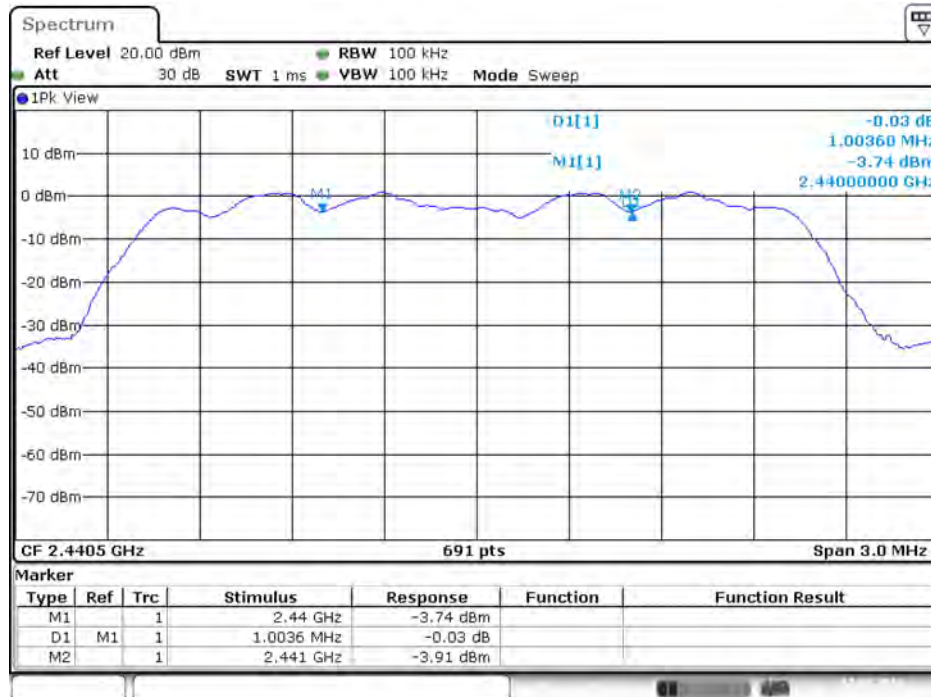

Date: 17.FEB.2016 15:11:56

Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz

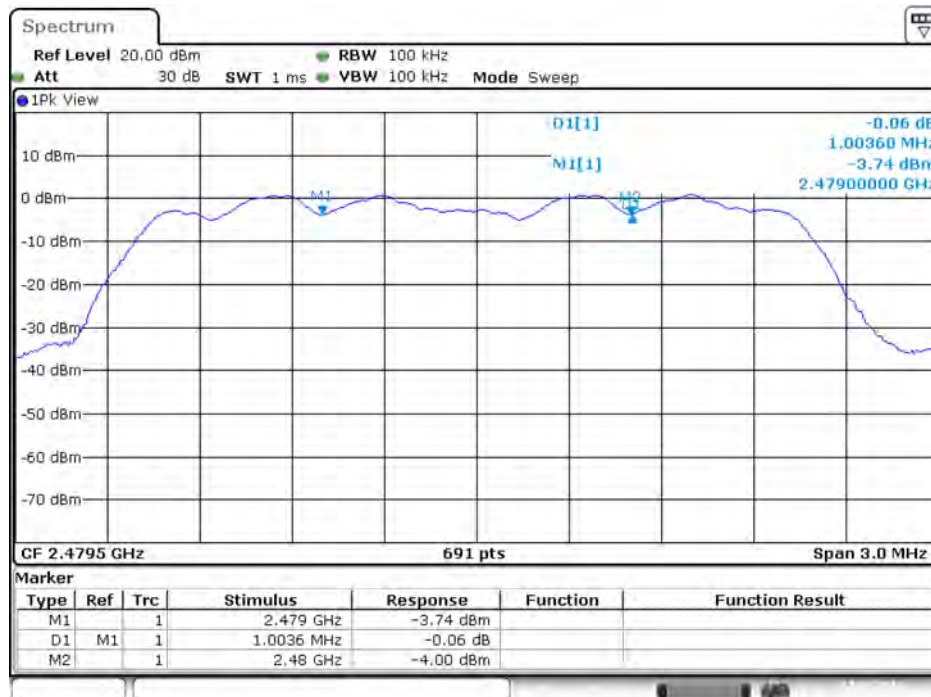

Date: 17.FEB.2016 15:12:47

4.4. Number of Hopping Frequency Measurement

4.4.1. Limit

At least 15 hopping frequencies, and should be equally spaced.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	1000 kHz
VBW	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1000 kHz and the video bandwidth of 1000 kHz were utilized.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

4.4.4. Test Setup Layout

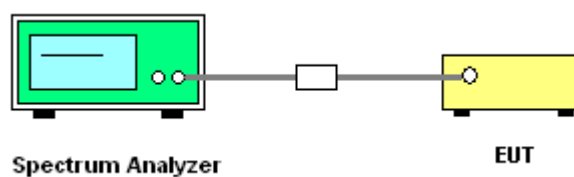

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Number of Hopping Frequency

Temperature	24°C	Humidity	60%
Test Engineer	Andy Tsai	Configurations	EDR (8DPSK)

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
EDR (8DPSK)	0 ~ 78	2402 ~ 2480MHz	79	15	Complies

Number of Hopping Channel Plot on EDR (8DPSK) / Channel 0~78 / 2402 MHz ~ 2480 MHz

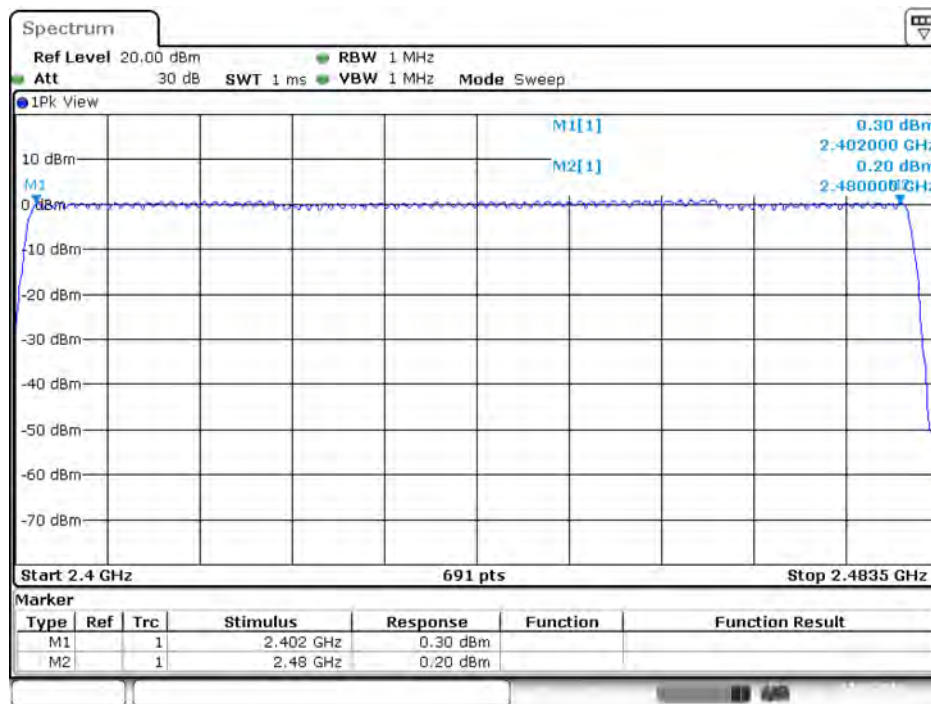

Date: 17.FEB.2016 15:15:43

4.5. Dwell Time Measurement

4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RBW	1000 kHz
VBW	1000 kHz
Detector	Peak
Trace	Single Trigger

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for DH1, DH3, DH5 packet transmitting.
8. Measure the maximum time duration of one single pulse.

4.5.4. Test Setup Layout

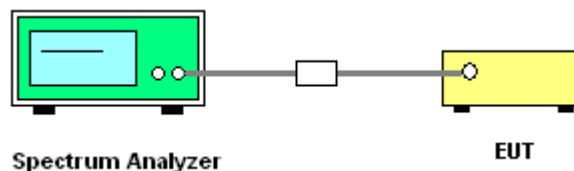

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Dwell Time

Temperature	24°C	Humidity	60%
Test Engineer	Andy Tsai	Configurations	BR (GFSK) / DH1, DH3, DH5

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH1	2402 MHz	0.3913	0.1252	0.4000	Complies
DH3	2402 MHz	1.6522	0.2644	0.4000	Complies
DH5	2402 MHz	2.8986	0.3092	0.4000	Complies
DH1	2441 MHz	0.3913	0.1252	0.4000	Complies
DH3	2441 MHz	1.6522	0.2644	0.4000	Complies
DH5	2441 MHz	2.8986	0.3092	0.4000	Complies
DH1	2480 MHz	0.3913	0.1252	0.4000	Complies
DH3	2480 MHz	1.6522	0.2644	0.4000	Complies
DH5	2480 MHz	2.8986	0.3092	0.4000	Complies


Remark:

Dwell Time = 79(channels) x 0.4(s) x average hopping channel x package transfer time (us)

79 channels come from the Hopping Channel number.


Average Hopping Channel = hops / sweep time

Dwell Time Plot on BR (GFSK) / Channel 0 / DH1 / 2402 MHz

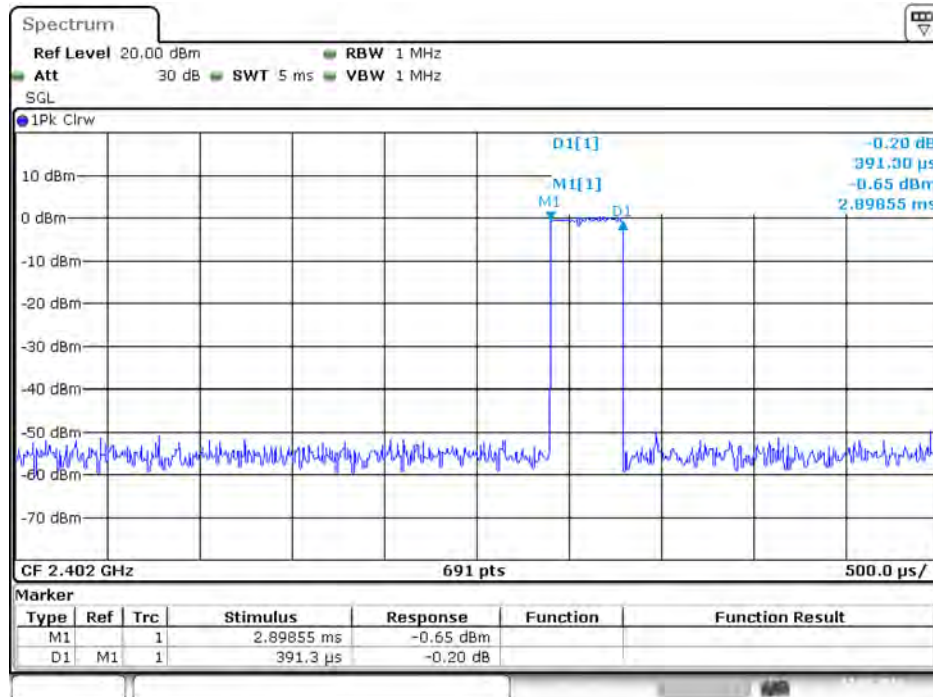


Date: 17.FEB.2016 15:29:16

Dwell Time Plot on BR (GFSK) / Channel 39 / DH1 / 2441 MHz

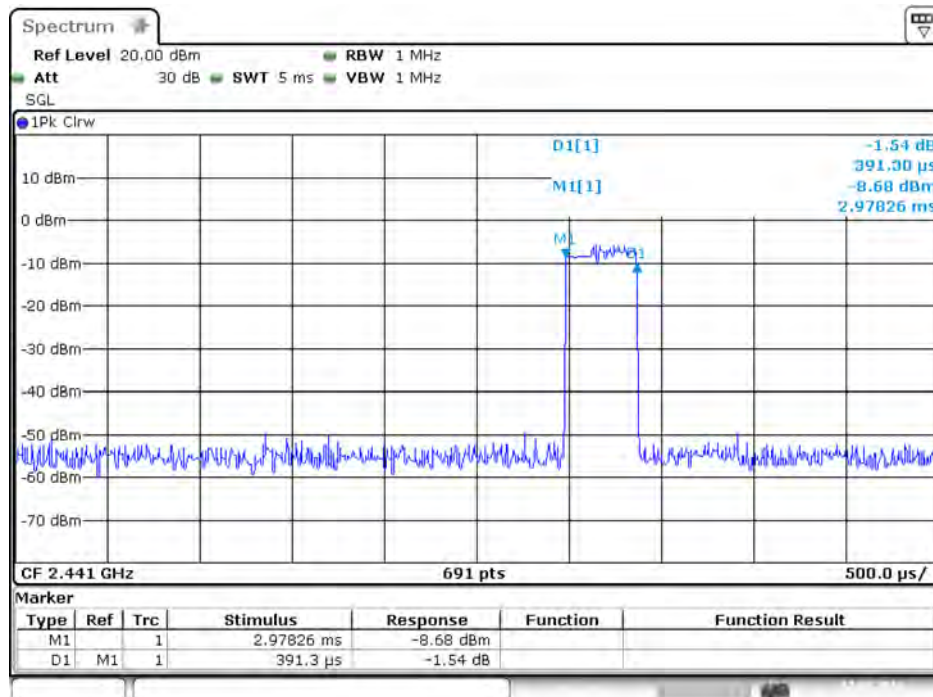


Date: 17.FEB.2016 15:30:03

Dwell Time Plot on BR (GFSK) / Channel 78 / DH1 / 2480 MHz

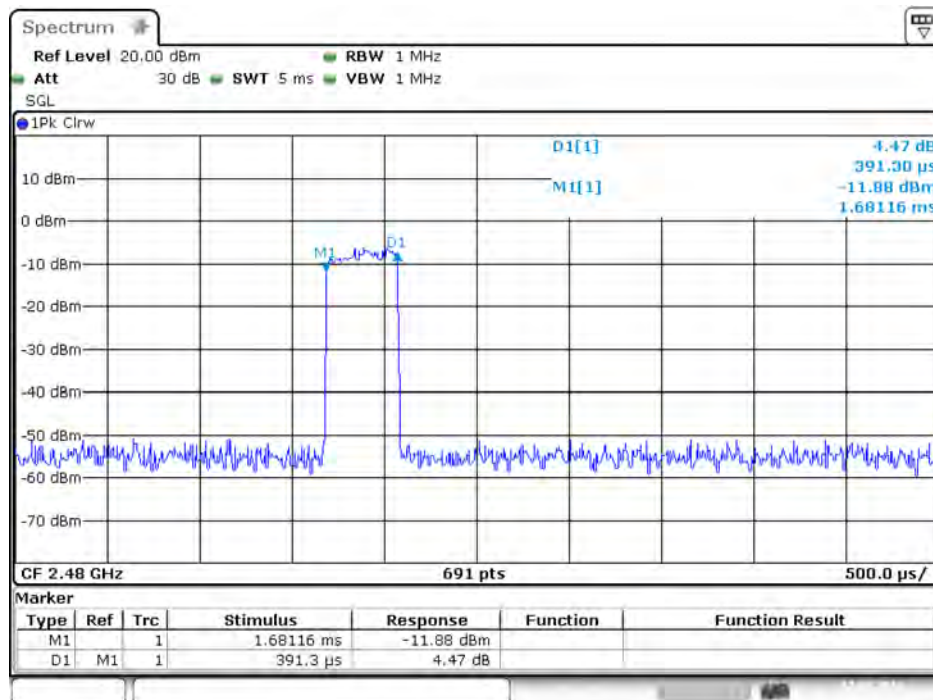


Date: 17.FEB.2016 15:35:37

Dwell Time Plot on BR (GFSK) / Channel 0 / DH3 / 2402 MHz

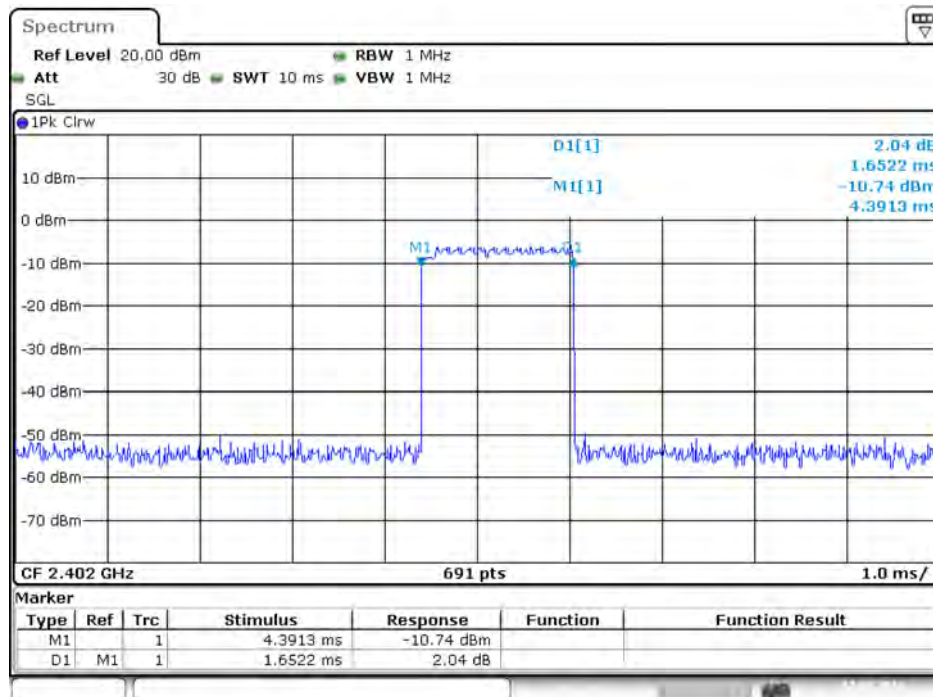


Date: 17.FEB.2016 15:26:58

Dwell Time Plot on BR (GFSK) / Channel 39 / DH3 / 2441 MHz

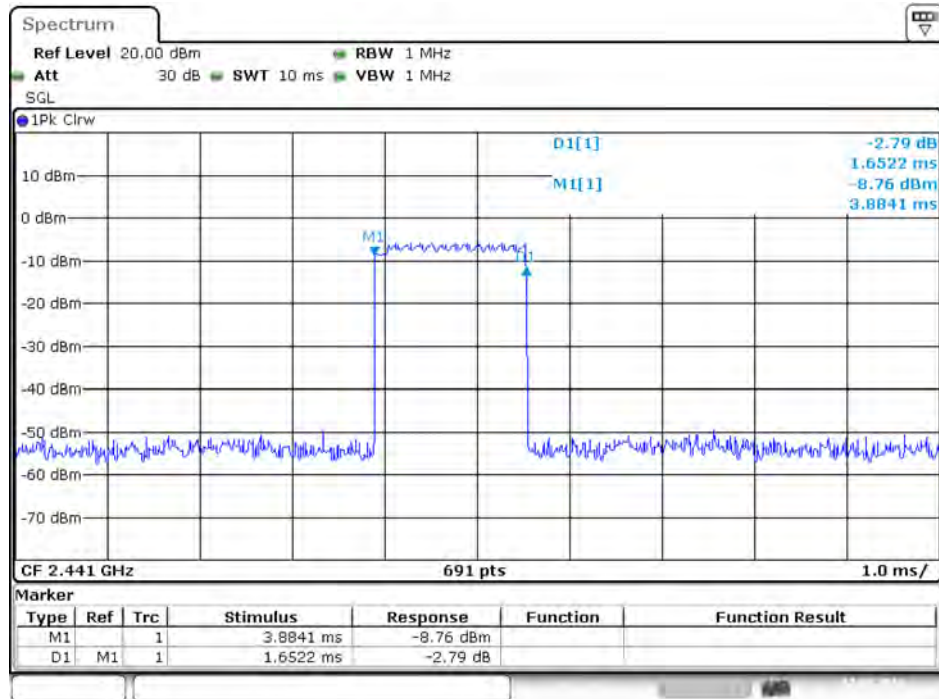


Date: 17.FEB.2016 15:26:20

Dwell Time Plot on BR (GFSK) / Channel 78 / DH3 / 2480 MHz

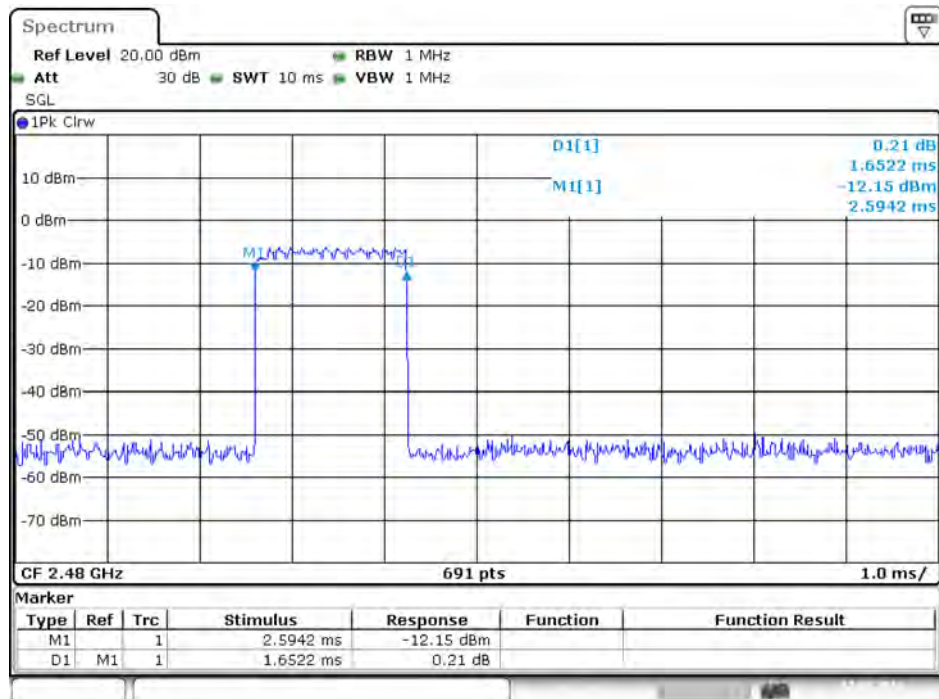


Date: 17.FEB.2016 15:25:42

Dwell Time Plot on BR (GFSK) / Channel 0 / DH5 / 2402 MHz

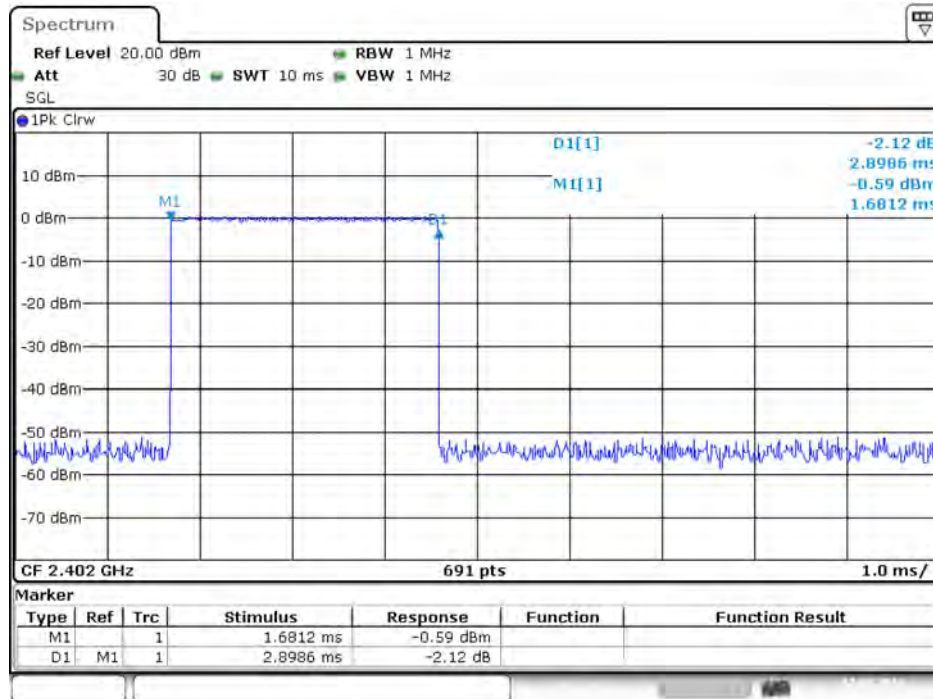


Date: 17.FEB.2016 15:18:51

Dwell Time Plot on BR (GFSK) / Channel 39 / DH5 / 2441 MHz

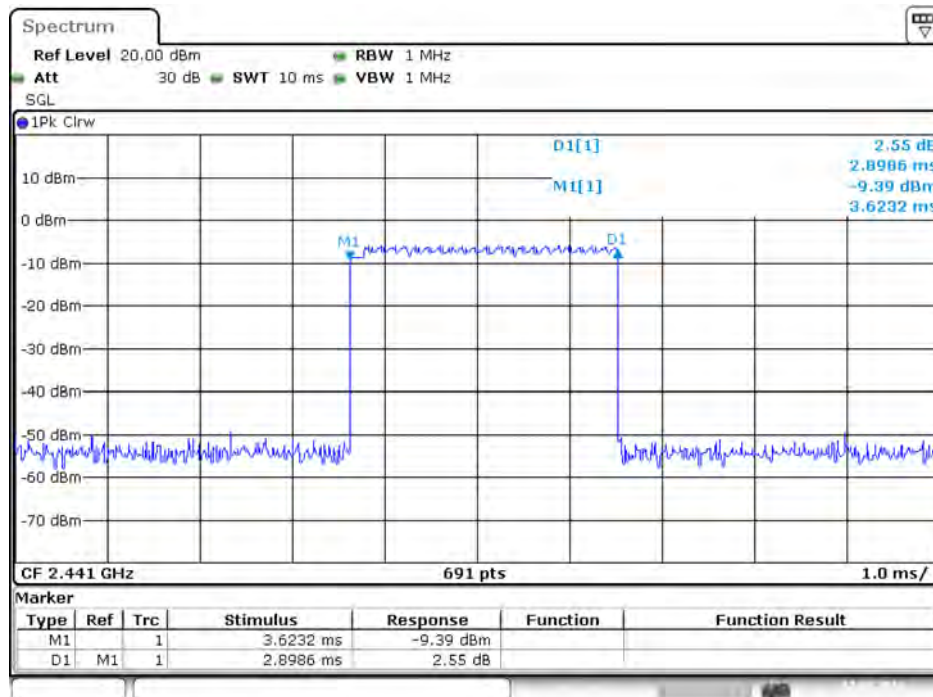

Date: 17.FEB.2016 15:20:38

Dwell Time Plot on BR (GFSK) / Channel 78 / DH5 / 2480 MHz

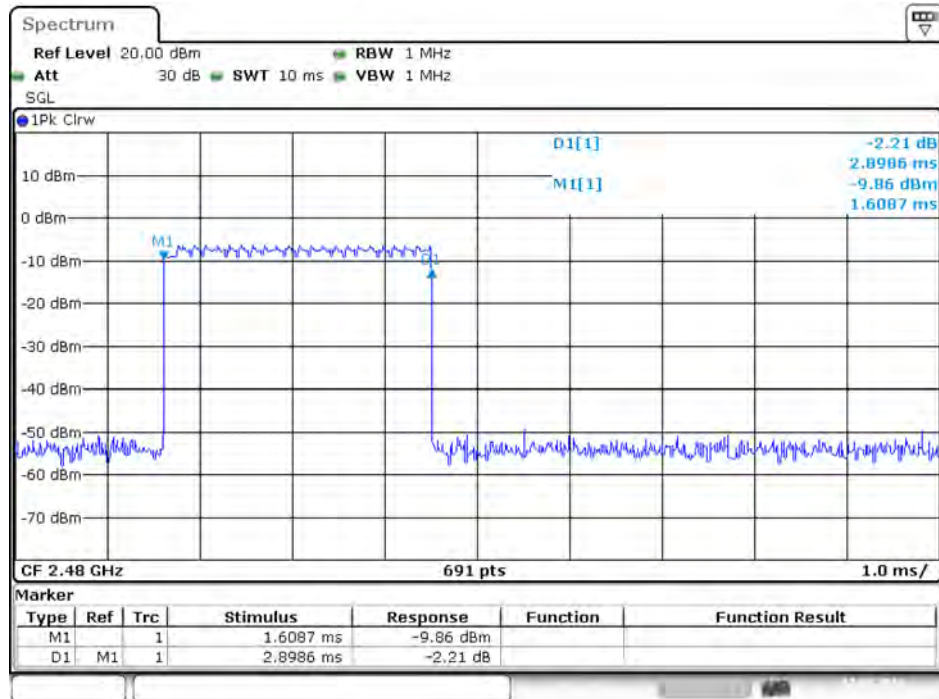

Date: 17.FEB.2016 15:21:25

4.6. Radiated Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz, 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz, RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz, RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz, RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

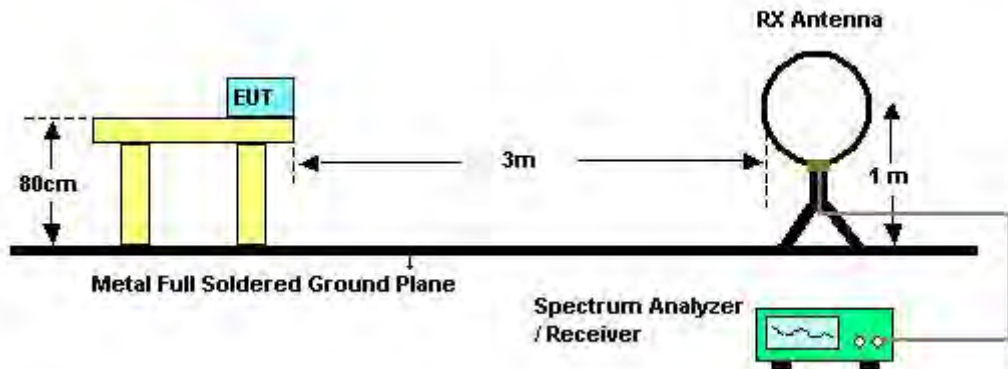

For Radiated Emissions: 30MHz~1GHz

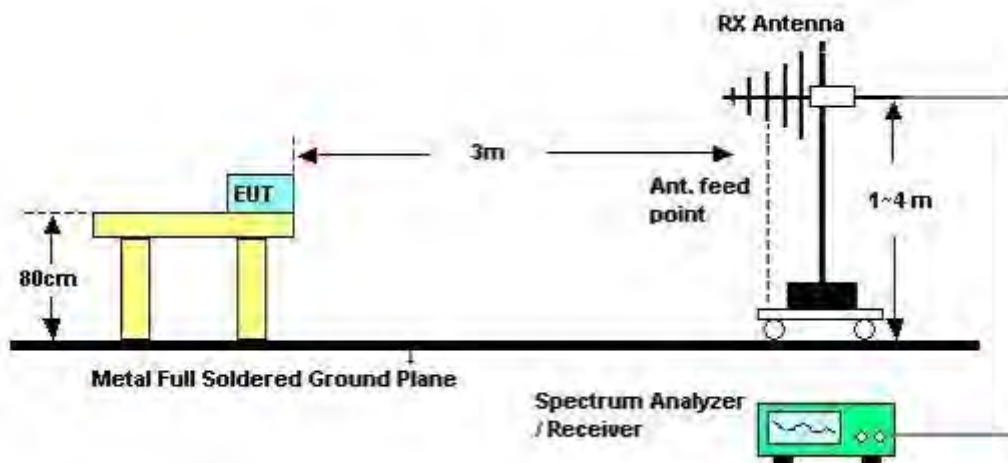

For Radiated Emissions: Above 1GHz

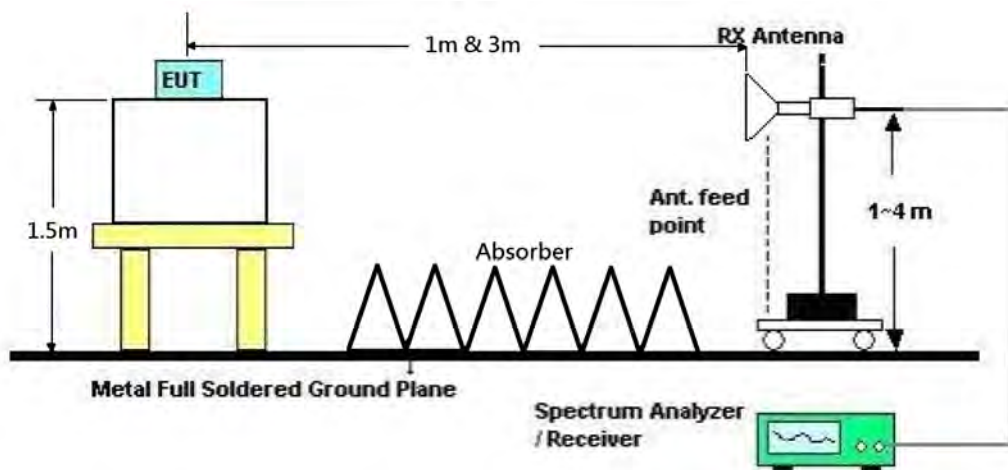

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	Normal Link
Test Date	Jan. 13, 2016	Test Mode	Mode 2

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	Normal Link
Test Mode	Mode 2		

Horizontal

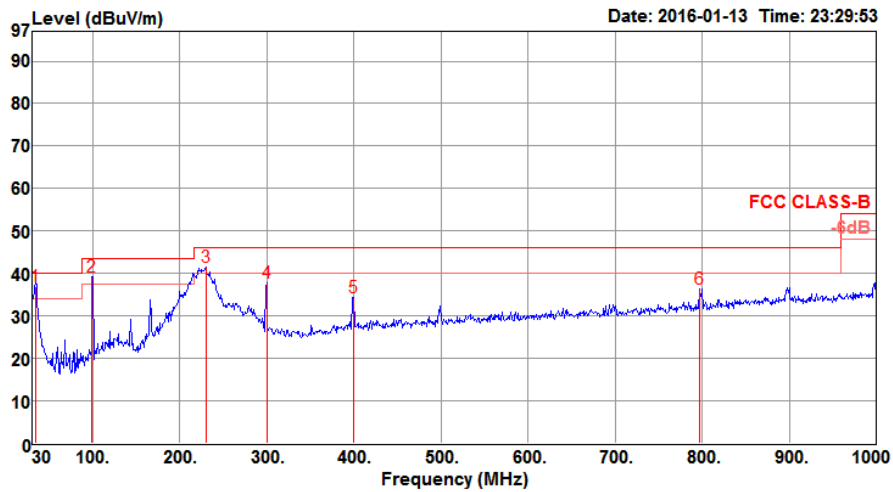

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	33.88	36.96	40.00	-3.04	41.02	1.24	23.19	28.49	QP	100	0 HORIZONTAL
2	98.87	39.32	43.50	-4.18	49.52	1.58	16.51	28.29	Peak	100	0 HORIZONTAL
3	229.82	41.42	46.00	-4.58	50.23	1.93	16.90	27.64	Peak	100	0 HORIZONTAL
4	299.66	37.87	46.00	-8.13	43.64	2.13	19.58	27.48	Peak	100	0 HORIZONTAL
5	399.57	34.35	46.00	-11.65	38.04	2.36	22.17	28.22	Peak	100	0 HORIZONTAL
6	797.27	36.32	46.00	-9.68	34.71	3.28	26.67	28.34	Peak	100	0 HORIZONTAL

Vertical

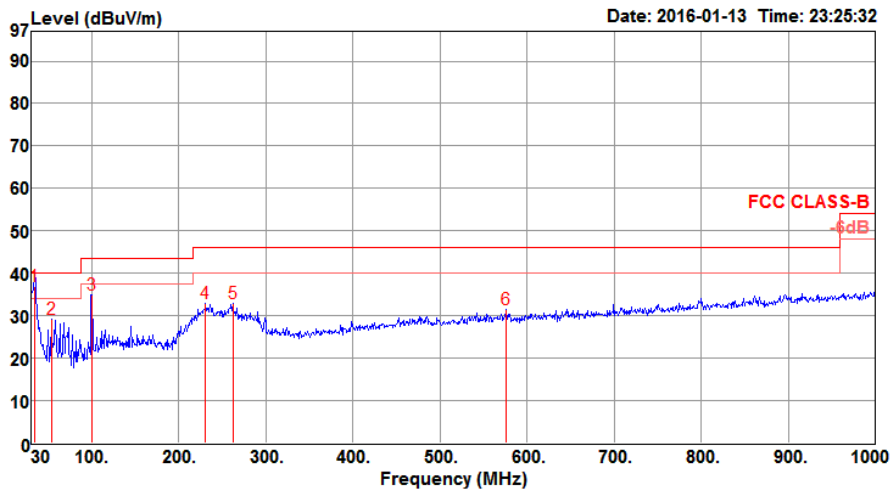

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	33.88	36.83	40.00	-3.17	40.89	1.24	23.19	28.49	QP	200	0	VERTICAL
2	53.28	29.27	40.00	-10.73	42.53	1.35	13.84	28.45	Peak	200	0	VERTICAL
3	99.84	34.85	43.50	-8.65	44.86	1.58	16.70	28.29	Peak	200	0	VERTICAL
4	230.79	32.90	46.00	-13.10	41.62	1.93	16.98	27.63	Peak	200	0	VERTICAL
5	261.83	32.97	46.00	-13.03	38.81	2.01	19.71	27.56	Peak	200	0	VERTICAL
6	576.11	31.48	46.00	-14.52	32.71	2.77	24.71	28.71	Peak	200	0	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 0 / Chain 2
Test Date	Jan. 15, 2016	Test Mode	Mode 1

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4795.52	52.65	74.00	-21.35	44.39	8.15	33.05	32.94	100	25 Peak	HORIZONTAL
2	4795.52	27.92	54.00	-26.08	19.66	8.15	33.05	32.94	100	25 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4798.00	53.09	74.00	-20.91	44.80	8.15	33.08	32.94	100	48 Peak	VERTICAL
2	4798.00	28.36	54.00	-25.64	20.07	8.15	33.08	32.94	100	48 Average	VERTICAL



Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 39 / Chain 2
Test Date	Jan. 15, 2016	Test Mode	Mode 1

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4881.92	52.65	74.00	-21.35	44.42	7.90	33.26	32.93	100	151	Peak	HORIZONTAL
2	4881.92	27.92	54.00	-26.08	19.69	7.90	33.26	32.93	100	151	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4872.36	52.55	74.00	-21.45	44.31	7.94	33.23	32.93	100	148	Peak	VERTICAL
2	4872.36	27.82	54.00	-26.18	19.58	7.94	33.23	32.93	100	148	Average	VERTICAL



Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 78 / Chain 2
Test Date	Jan. 15, 2016	Test Mode	Mode 1

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4964.64	51.80	74.00	-22.20	43.61	7.69	33.41	32.91	100	125	Peak	HORIZONTAL
2	4964.64	27.07	54.00	-26.93	18.88	7.69	33.41	32.91	100	125	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4955.00	52.19	74.00	-21.81	44.01	7.69	33.41	32.92	100	147	Peak	VERTICAL
2	4955.00	27.46	54.00	-26.54	19.28	7.69	33.41	32.92	100	147	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 0 / Chain 2
Test Date	Jan. 15, 2016	Test Mode	Mode 1

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4804.88	53.83	74.00	-20.17	45.54	8.15	33.08	32.94	100	25	Peak	HORIZONTAL
2	4804.88	29.10	54.00	-24.90	20.81	8.15	33.08	32.94	100	25	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4802.40	53.25	74.00	-20.75	44.96	8.15	33.08	32.94	100	65	Peak	VERTICAL
2	4802.40	28.52	54.00	-25.48	20.23	8.15	33.08	32.94	100	65	Average	VERTICAL



Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 39 / Chain 2
Test Date	Jan. 15, 2016	Test Mode	Mode 1

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4876.52	52.47	74.00	-21.53	44.23	7.94	33.23	32.93	100	148	Peak	HORIZONTAL
2	4876.52	27.74	54.00	-26.26	19.50	7.94	33.23	32.93	100	148	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4872.40	52.76	74.00	-21.24	44.52	7.94	33.23	32.93	100	125	Peak	VERTICAL
2	4872.40	28.03	54.00	-25.97	19.79	7.94	33.23	32.93	100	125	Average	VERTICAL



Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 78 / Chain 2
Test Date	Jan. 15, 2016	Test Mode	Mode 1

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4966.32	51.47	74.00	-22.53	43.28	7.69	33.41	32.91	100	158	Peak	HORIZONTAL
2	4966.32	26.74	54.00	-27.26	18.55	7.69	33.41	32.91	100	158	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4969.80	51.52	74.00	-22.48	43.34	7.65	33.44	32.91	100	185	Peak	VERTICAL
2	4969.80	26.79	54.00	-27.21	18.61	7.65	33.44	32.91	100	185	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 0 / Chain 2
Test Date	Jan. 14, 2016	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4802.26	50.76	74.00	-23.24	42.47	8.15	33.08	32.94	174	149	Peak	HORIZONTAL
2	4802.26	26.03	54.00	-27.97	17.74	8.15	33.08	32.94	174	149	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4806.42	49.97	74.00	-24.03	41.68	8.15	33.08	32.94	161	183	Peak	VERTICAL
2	4806.42	25.24	54.00	-28.76	16.95	8.15	33.08	32.94	161	183	Average	VERTICAL



Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 39 / Chain 2
Test Date	Jan. 14, 2016	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4883.38	50.13	74.00	-23.87	41.90	7.90	33.26	32.93	131	212	Peak	HORIZONTAL
2	4883.38	25.40	54.00	-28.60	17.17	7.90	33.26	32.93	131	212	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4881.88	49.81	74.00	-24.19	41.58	7.90	33.26	32.93	154	190	Peak	VERTICAL
2	4881.88	25.08	54.00	-28.92	16.85	7.90	33.26	32.93	154	190	Average	VERTICAL



Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 78 / Chain 2
Test Date	Jan. 14, 2016	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4961.66	49.75	74.00	-24.25	41.56	7.69	33.41	32.91	103	248	Peak	HORIZONTAL
2	4961.66	25.02	54.00	-28.98	16.83	7.69	33.41	32.91	103	248	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4959.82	49.56	74.00	-24.44	41.37	7.69	33.41	32.91	174	149	Peak	VERTICAL
2	4959.82	24.83	54.00	-29.17	16.64	7.69	33.41	32.91	174	149	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 0 / Chain 2
Test Date	Jan. 14, 2016	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4802.55	51.21	74.00	-22.79	42.92	8.15	33.08	32.94	186	97	Peak	HORIZONTAL
2	4802.55	26.48	54.00	-27.52	18.19	8.15	33.08	32.94	186	97	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4802.40	50.36	74.00	-23.64	42.07	8.15	33.08	32.94	175	133	Peak	VERTICAL
2	4802.40	25.63	54.00	-28.37	17.34	8.15	33.08	32.94	175	133	Average	VERTICAL



Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 39 / Chain 2
Test Date	Jan. 14, 2016	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4880.94	49.83	74.00	-24.17	41.59	7.94	33.23	32.93	144	215	Peak	HORIZONTAL
2	4880.94	25.10	54.00	-28.90	16.86	7.94	33.23	32.93	144	215	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4884.10	50.07	74.00	-23.93	41.84	7.90	33.26	32.93	158	174	Peak	VERTICAL
2	4884.10	25.34	54.00	-28.66	17.11	7.90	33.26	32.93	158	174	Average	VERTICAL



Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 78 / Chain 2
Test Date	Jan. 14, 2016	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4960.29	49.66	74.00	-24.34	41.47	7.69	33.41	32.91	132	259	Peak	HORIZONTAL
2	4960.29	24.93	54.00	-29.07	16.74	7.69	33.41	32.91	132	259	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4960.03	50.90	74.00	-23.10	42.71	7.69	33.41	32.91	112	281	Peak	VERTICAL
2	4960.03	26.17	54.00	-27.83	17.98	7.69	33.41	32.91	112	281	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 0 / Chain 1
Test Date	Jan. 10, 2016	Test Mode	Mode 3

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4804.12	48.08	74.00	-25.92	39.94	8.15	33.08	33.09	169	156	Peak	HORIZONTAL
2	4804.12	23.04	54.00	-30.96	14.90	8.15	33.08	33.09	169	156	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4807.92	49.10	74.00	-24.90	40.96	8.15	33.08	33.09	167	137	Peak	VERTICAL
2	4807.92	24.06	54.00	-29.94	15.92	8.15	33.08	33.09	167	137	Average	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 39 / Chain 1
Test Date	Jan. 10, 2016	Test Mode	Mode 3

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4872.88	48.25	74.00	-25.75	40.16	7.94	33.23	33.08	147	110	Peak	HORIZONTAL
2	4872.88	23.21	54.00	-30.79	15.12	7.94	33.23	33.08	147	110	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4881.44	48.41	74.00	-25.59	40.32	7.90	33.26	33.07	129	195	Peak	VERTICAL
2	4881.44	23.37	54.00	-30.63	15.28	7.90	33.26	33.07	129	195	Average	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 78 / Chain 1
Test Date	Jan. 10, 2016	Test Mode	Mode 3

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4951.00	48.85	74.00	-25.15	40.79	7.74	33.38	33.06	115	240	Peak	HORIZONTAL
2	4951.00	23.81	54.00	-30.19	15.75	7.74	33.38	33.06	115	240	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4960.08	46.51	74.00	-27.49	38.47	7.69	33.41	33.06	104	172	Peak	VERTICAL
2	4960.08	21.47	54.00	-32.53	13.43	7.69	33.41	33.06	104	172	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 0 / Chain 1
Test Date	Jan. 10, 2016	Test Mode	Mode 3

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4804.92	48.37	74.00	-25.63	40.23	8.15	33.08	33.09	203	221	Peak	HORIZONTAL
2	4804.92	23.33	54.00	-30.67	15.19	8.15	33.08	33.09	203	221	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4799.88	48.94	74.00	-25.06	40.80	8.15	33.08	33.09	186	273	Peak	VERTICAL
2	4799.88	23.90	54.00	-30.10	15.76	8.15	33.08	33.09	186	273	Average	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 39 / Chain 1
Test Date	Jan. 10, 2016	Test Mode	Mode 3

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4880.48	48.50	74.00	-25.50	40.40	7.94	33.23	33.07	192	230	Peak	HORIZONTAL
2	4880.48	23.46	54.00	-30.54	15.36	7.94	33.23	33.07	192	230	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4885.80	48.38	74.00	-25.62	40.29	7.90	33.26	33.07	188	258	Peak	VERTICAL
2	4885.80	23.34	54.00	-30.66	15.25	7.90	33.26	33.07	188	258	Average	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 78 / Chain 1
Test Date	Jan. 10, 2016	Test Mode	Mode 3

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4963.60	49.11	74.00	-24.89	41.07	7.69	33.41	33.06	177	230	Peak	HORIZONTAL
2	4963.60	24.07	54.00	-29.93	16.03	7.69	33.41	33.06	177	230	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4960.56	49.08	74.00	-24.92	41.04	7.69	33.41	33.06	165	308	Peak	VERTICAL
2	4960.56	24.04	54.00	-29.96	16.00	7.69	33.41	33.06	165	308	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 0 / Chain 1
Test Date	Jan. 11, 2016	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4804.26	46.87	74.00	-27.13	38.73	8.15	33.08	33.09	149	212	Peak	HORIZONTAL
2	4805.16	22.45	54.00	-31.55	14.31	8.15	33.08	33.09	149	212	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4806.56	47.72	74.00	-26.28	39.58	8.15	33.08	33.09	149	212	Peak	VERTICAL
2	4806.56	22.68	54.00	-31.32	14.54	8.15	33.08	33.09	149	212	Average	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 39 / Chain 1
Test Date	Jan. 11, 2016	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4881.95	46.16	74.00	-27.84	38.07	7.90	33.26	33.07	138	156	Peak	HORIZONTAL
2	4883.64	20.79	54.00	-33.21	12.70	7.90	33.26	33.07	138	156	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4882.55	46.72	74.00	-27.28	38.63	7.90	33.26	33.07	138	156	Peak	VERTICAL
2	4882.55	21.68	54.00	-32.32	13.59	7.90	33.26	33.07	138	156	Average	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 78 / Chain 1
Test Date	Jan. 11, 2016	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4965.32	45.74	74.00	-28.26	37.70	7.69	33.41	33.06	145	146	Peak	HORIZONTAL
2	4967.89	20.59	54.00	-33.41	12.56	7.65	33.44	33.06	145	146	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4966.00	46.19	74.00	-27.81	38.15	7.69	33.41	33.06	145	146	Peak	VERTICAL
2	4966.00	21.15	54.00	-32.85	13.11	7.69	33.41	33.06	145	146	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 0 / Chain 1
Test Date	Jan. 11, 2016	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4847.53	20.95	54.00	-33.05	12.83	8.03	33.17	33.08	157	113	Average	HORIZONTAL
2	4848.65	46.43	74.00	-27.57	38.31	8.03	33.17	33.08	157	113	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4849.13	46.99	74.00	-27.01	38.87	8.03	33.17	33.08	157	113	Peak	VERTICAL
2	4849.13	21.95	54.00	-32.05	13.83	8.03	33.17	33.08	157	113	Average	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 39 / Chain 1
Test Date	Jan. 11, 2016	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4881.83	45.81	74.00	-28.19	37.72	7.90	33.26	33.07	142	125	Peak	HORIZONTAL
2	4884.53	20.42	54.00	-33.58	12.33	7.90	33.26	33.07	142	125	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4882.23	46.35	74.00	-27.65	38.26	7.90	33.26	33.07	142	125	Peak	VERTICAL
2	4882.23	21.31	54.00	-32.69	13.22	7.90	33.26	33.07	142	125	Average	VERTICAL



Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 78 / Chain 1
Test Date	Jan. 11, 2016	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4961.39	44.98	74.00	-29.02	36.94	7.69	33.41	33.06	172	74	Peak	HORIZONTAL
2	4961.84	20.37	54.00	-33.63	12.33	7.69	33.41	33.06	172	74	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4960.24	21.30	54.00	-32.70	13.26	7.69	33.41	33.06	172	74	Average	VERTICAL
2	4960.33	46.34	74.00	-27.66	38.30	7.69	33.41	33.06	172	74	Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Emissions Measurement

4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (20dBc in any 100 kHz bandwidth emission)	100 kHz / 100 kHz for Peak

4.7.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.6.3.

For Radiated Out of Band Emission Measurement:

1. The test procedure is follow 15.247(d).

4.7.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.6.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 0, 39, 78 / Chain 2
Test Date	Jan. 15, 2016	Test Mode	Mode 1

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2363.20	57.26	74.00	-16.74	24.00	4.98	28.28	0.00	228	43	Peak	VERTICAL
2	2363.20	32.53	54.00	-21.47	-0.73	4.98	28.28	0.00	228	43	Average	VERTICAL
3	2402.00	97.31			63.94	5.03	28.34	0.00	228	43	Peak	VERTICAL
4	2402.00	72.58			39.21	5.03	28.34	0.00	228	43	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2357.00	57.34	74.00	-16.66	24.10	4.97	28.27	0.00	226	32	Peak	VERTICAL
2	2357.00	32.61	54.00	-21.39	-0.63	4.97	28.27	0.00	226	32	Average	VERTICAL
3	2441.00	95.79			62.30	5.08	28.41	0.00	226	32	Peak	VERTICAL
4	2441.00	71.06			37.57	5.08	28.41	0.00	226	32	Average	VERTICAL
5	2484.70	57.92	74.00	-16.08	24.32	5.12	28.48	0.00	226	32	Peak	VERTICAL
6	2484.70	33.19	54.00	-20.81	-0.41	5.12	28.48	0.00	226	32	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2480.20	103.78			70.21	5.11	28.46	0.00	216	255	Peak	HORIZONTAL
2	2480.20	79.05			45.48	5.11	28.46	0.00	216	255	Average	HORIZONTAL
3	2489.40	58.77	74.00	-15.23	25.15	5.13	28.49	0.00	216	255	Peak	HORIZONTAL
4	2489.40	34.04	54.00	-19.96	0.42	5.13	28.49	0.00	216	255	Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 0, 39, 78 / Chain 2
Test Date	Jan. 15, 2016	Test Mode	Mode 1

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2356.20	57.17	74.00	-16.83	23.93	4.97	28.27	0.00	185	207	Peak	VERTICAL
2	2356.20	32.44	54.00	-21.56	-0.80	4.97	28.27	0.00	185	207	Average	VERTICAL
3	2402.00	97.83			64.46	5.03	28.34	0.00	185	207	Peak	VERTICAL
4	2402.00	73.10			39.73	5.03	28.34	0.00	185	207	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2386.20	57.77	74.00	-16.23	24.45	5.01	28.31	0.00	189	200	Peak	VERTICAL
2	2386.20	33.04	54.00	-20.96	-0.28	5.01	28.31	0.00	189	200	Average	VERTICAL
3	2441.00	96.33			62.84	5.08	28.41	0.00	189	200	Peak	VERTICAL
4	2441.00	71.60			38.11	5.08	28.41	0.00	189	200	Average	VERTICAL
5	2494.20	59.24	74.00	-14.76	25.62	5.13	28.49	0.00	189	200	Peak	VERTICAL
6	2494.20	34.51	54.00	-19.49	0.89	5.13	28.49	0.00	189	200	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2480.20	103.70			70.13	5.11	28.46	0.00	216	256	Peak	HORIZONTAL
2	2480.20	78.97			45.40	5.11	28.46	0.00	216	256	Average	HORIZONTAL
3	2483.50	58.78	74.00	-15.22	25.18	5.12	28.48	0.00	216	256	Peak	HORIZONTAL
4	2483.50	34.05	54.00	-19.95	0.45	5.12	28.48	0.00	216	256	Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 0, 39, 78 / Chain 2
Test Date	Jan. 14, 2016	Test Mode	Mode 2

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2375.20	58.59	74.00	-15.41	25.31	4.99	28.29	0.00	133	310	Peak	VERTICAL
2	2375.20	33.86	54.00	-20.14	0.58	4.99	28.29	0.00	133	310	Average	VERTICAL
3	2402.20	101.85			68.48	5.03	28.34	0.00	133	310	Peak	VERTICAL
4	2402.20	77.12			43.75	5.03	28.34	0.00	133	310	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.40	57.66	74.00	-16.34	24.34	5.01	28.31	0.00	136	345	Peak	VERTICAL
2	2389.40	32.91	54.00	-21.09	-0.41	5.01	28.31	0.00	136	345	Average	VERTICAL
3	2441.00	101.80			68.31	5.08	28.41	0.00	136	345	Peak	VERTICAL
4	2441.00	77.07			43.58	5.08	28.41	0.00	136	345	Average	VERTICAL
5	2488.70	57.95	74.00	-16.05	24.35	5.12	28.48	0.00	136	345	Peak	VERTICAL
6	2488.70	33.22	54.00	-20.78	-0.38	5.12	28.48	0.00	136	345	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2480.00	103.59			70.02	5.11	28.46	0.00	125	309	Peak	VERTICAL
2	2480.00	78.86			45.29	5.11	28.46	0.00	125	309	Average	VERTICAL
3	2483.90	58.46	74.00	-15.54	24.86	5.12	28.48	0.00	125	309	Peak	VERTICAL
4	2483.90	33.73	54.00	-20.27	0.13	5.12	28.48	0.00	125	309	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 0, 39, 78 / Chain 2
Test Date	Jan. 14, 2016	Test Mode	Mode 2

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2378.80	57.66	74.00	-16.34	24.36	5.00	28.30	0.00	138	345	Peak	VERTICAL
2	2378.80	32.93	54.00	-21.07	-0.37	5.00	28.30	0.00	138	345	Average	VERTICAL
3	2402.00	101.64			68.27	5.03	28.34	0.00	138	345	Peak	VERTICAL
4	2402.00	76.91			43.54	5.03	28.34	0.00	138	345	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2377.40	57.29	74.00	-16.71	23.99	5.00	28.30	0.00	140	310	Peak	VERTICAL
2	2377.40	32.93	54.00	-21.07	-0.37	5.00	28.30	0.00	140	310	Average	VERTICAL
3	2441.00	101.36			67.87	5.08	28.41	0.00	140	310	Peak	VERTICAL
4	2441.00	76.63			43.14	5.08	28.41	0.00	140	310	Average	VERTICAL
5	2485.90	57.91	74.00	-16.09	24.31	5.12	28.48	0.00	140	310	Peak	VERTICAL
6	2485.90	33.18	54.00	-20.82	-0.42	5.12	28.48	0.00	140	310	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2480.00	103.67			70.10	5.11	28.46	0.00	126	310	Peak	VERTICAL
2	2480.00	78.94			45.37	5.11	28.46	0.00	126	310	Average	VERTICAL
3	2483.90	58.55	74.00	-15.45	24.95	5.12	28.48	0.00	126	310	Peak	VERTICAL
4	2483.90	33.82	54.00	-20.18	0.22	5.12	28.48	0.00	126	310	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 0, 39, 78 / Chain 1
Test Date	Jan. 10, 2016	Test Mode	Mode 3

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2362.60	56.92	74.00	-17.08	23.68	4.97	28.27	0.00	192	350	Peak	HORIZONTAL
2	2362.60	31.88	54.00	-22.12	-1.36	4.97	28.27	0.00	192	350	Average	HORIZONTAL
3	2402.00	100.76			67.39	5.03	28.34	0.00	192	350	Peak	HORIZONTAL
4	2402.00	75.72			42.35	5.03	28.34	0.00	192	350	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2376.00	57.09	74.00	-16.91	23.81	4.99	28.29	0.00	178	270	Peak	VERTICAL
2	2376.00	32.05	54.00	-21.95	-1.23	4.99	28.29	0.00	178	270	Average	VERTICAL
3	2441.00	98.56			65.07	5.08	28.41	0.00	178	270	Peak	VERTICAL
4	2441.00	73.52			40.03	5.08	28.41	0.00	178	270	Average	VERTICAL
5	2496.70	57.77	74.00	-16.23	24.13	5.14	28.50	0.00	178	270	Peak	VERTICAL
6	2496.70	32.73	54.00	-21.27	-0.91	5.14	28.50	0.00	178	270	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2479.80	97.16			63.59	5.11	28.46	0.00	171	267	Peak	VERTICAL
2	2479.80	72.12			38.55	5.11	28.46	0.00	171	267	Average	VERTICAL
3	2491.60	57.32	74.00	-16.68	23.70	5.13	28.49	0.00	171	267	Peak	VERTICAL
4	2491.60	32.28	54.00	-21.72	-1.34	5.13	28.49	0.00	171	267	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 0, 39, 78 / Chain 1
Test Date	Jan. 10, 2016	Test Mode	Mode 3

Channel 0

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2380.60	56.79	74.00	-17.21	23.49	5.00	28.30	0.00	181	284	Peak	VERTICAL
2	2380.60	31.75	54.00	-22.25	-1.55	5.00	28.30	0.00	181	284	Average	VERTICAL
3	2402.00	96.02			62.65	5.03	28.34	0.00	181	284	Peak	VERTICAL
4	2402.00	70.98			37.61	5.03	28.34	0.00	181	284	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2350.60	56.38	74.00	-17.62	23.17	4.96	28.25	0.00	171	334	Peak	HORIZONTAL
2	2350.60	31.34	54.00	-22.66	-1.87	4.96	28.25	0.00	171	334	Average	HORIZONTAL
3	2441.40	101.00			67.51	5.08	28.41	0.00	171	334	Peak	HORIZONTAL
4	2441.40	75.96			42.47	5.08	28.41	0.00	171	334	Average	HORIZONTAL
5	2492.20	57.56	74.00	-16.44	23.94	5.13	28.49	0.00	171	334	Peak	HORIZONTAL
6	2492.20	32.52	54.00	-21.48	-1.10	5.13	28.49	0.00	171	334	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2480.20	99.00			65.43	5.11	28.46	0.00	150	188	Peak	HORIZONTAL
2	2480.20	73.96			40.39	5.11	28.46	0.00	150	188	Average	HORIZONTAL
3	2495.90	57.00	74.00	-17.00	23.38	5.13	28.49	0.00	150	188	Peak	HORIZONTAL
4	2495.90	31.96	54.00	-22.04	-1.66	5.13	28.49	0.00	150	188	Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	BR (GFSK) / Channel 0, 39, 78 / Chain 1
Test Date	Jan. 11, 2016	Test Mode	Mode 4

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2365.00	57.34	74.00	-16.66	24.08	4.98	28.28	0.00	150	300	Peak	VERTICAL
2	2365.00	32.30	54.00	-21.70	-0.96	4.98	28.28	0.00	150	300	Average	VERTICAL
3	2402.20	94.62			61.25	5.03	28.34	0.00	150	300	Peak	VERTICAL
4	2402.20	69.58			36.21	5.03	28.34	0.00	150	300	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2357.40	57.67	74.00	-16.33	24.43	4.97	28.27	0.00	141	14	Peak	VERTICAL
2	2357.40	32.63	54.00	-21.37	-0.61	4.97	28.27	0.00	141	14	Average	VERTICAL
3	2441.40	98.95			65.46	5.08	28.41	0.00	141	14	Peak	VERTICAL
4	2441.40	73.91			40.42	5.08	28.41	0.00	141	14	Average	VERTICAL
5	2490.60	58.18	74.00	-15.82	24.56	5.13	28.49	0.00	141	14	Peak	VERTICAL
6	2490.60	33.14	54.00	-20.86	-0.48	5.13	28.49	0.00	141	14	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2480.20	99.87			66.30	5.11	28.46	0.00	143	338	Peak	VERTICAL
2	2480.20	74.83			41.26	5.11	28.46	0.00	143	338	Average	VERTICAL
3	2487.00	58.12	74.00	-15.88	24.52	5.12	28.48	0.00	143	338	Peak	VERTICAL
4	2487.00	33.08	54.00	-20.92	-0.52	5.12	28.48	0.00	143	338	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	EDR (8DPSK) / Channel 0, 39, 78 / Chain 1
Test Date	Jan. 11, 2016	Test Mode	Mode 4

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.60	56.93	74.00	-17.07	23.61	5.01	28.31	0.00	106	300	Peak	VERTICAL
2	2389.60	31.89	54.00	-22.11	-1.43	5.01	28.31	0.00	106	300	Average	VERTICAL
3	2402.00	98.48			65.11	5.03	28.34	0.00	106	300	Peak	VERTICAL
4	2402.00	73.44			40.07	5.03	28.34	0.00	106	300	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2375.00	57.12	74.00	-16.88	23.84	4.99	28.29	0.00	142	15	Peak	VERTICAL
2	2375.00	32.08	54.00	-21.92	-1.20	4.99	28.29	0.00	142	15	Average	VERTICAL
3	2441.00	98.98			65.49	5.08	28.41	0.00	142	15	Peak	VERTICAL
4	2441.00	73.94			40.45	5.08	28.41	0.00	142	15	Average	VERTICAL
5	2489.80	58.11	74.00	-15.89	24.49	5.13	28.49	0.00	142	15	Peak	VERTICAL
6	2489.80	33.07	54.00	-20.93	-0.55	5.13	28.49	0.00	142	15	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2480.20	99.99			66.42	5.11	28.46	0.00	143	337	Peak	VERTICAL
2	2480.20	74.95			41.38	5.11	28.46	0.00	143	337	Average	VERTICAL
3	2499.40	57.54	74.00	-16.46	23.90	5.14	28.50	0.00	143	337	Peak	VERTICAL
4	2499.40	32.50	54.00	-21.50	-1.14	5.14	28.50	0.00	143	337	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Test Mode: Mode 1

Plot on Configuration For BR (GFSK) / Channel 0 / Reference Level

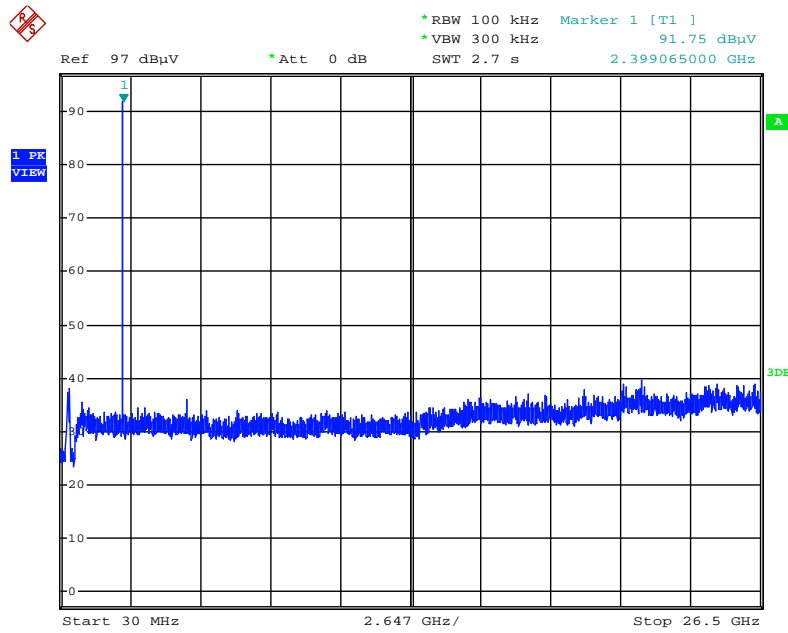


Date: 15.JAN.2016 02:45:22

Plot on Configuration For BR (GFSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)

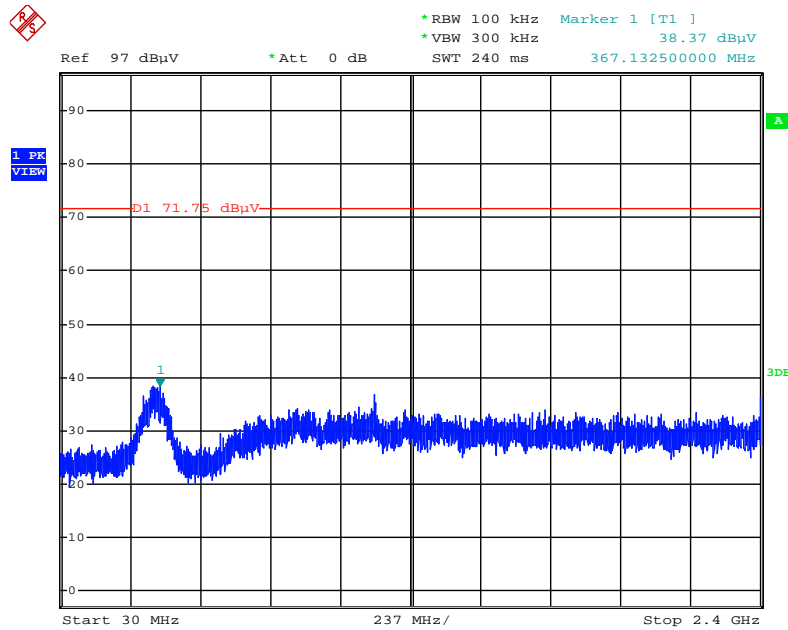


Date: 15.JAN.2016 02:45:55

Plot on Configuration For BR (GFSK) / Channel 0 / 2483.5MHz~26500MHz (down 20dBc)

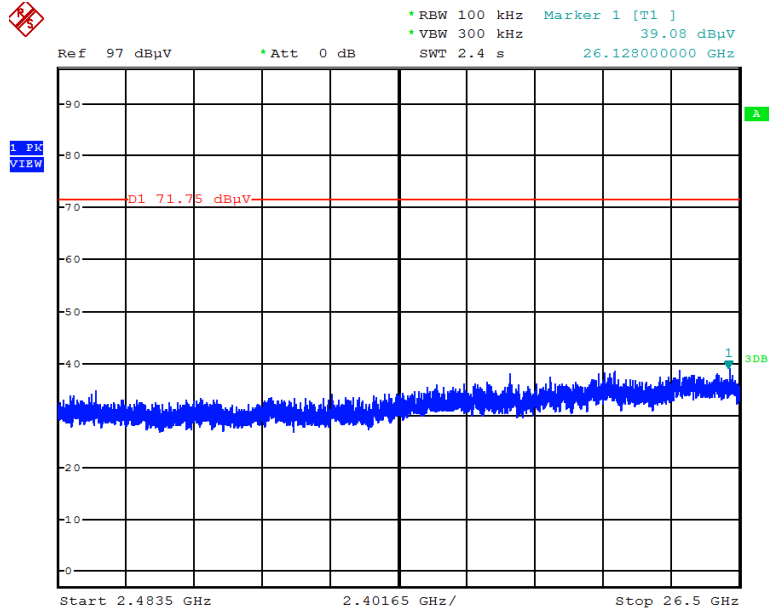


Date: 15.JAN.2016 02:46:16

Plot on Configuration For BR (GFSK) / Channel 78 / Reference Level

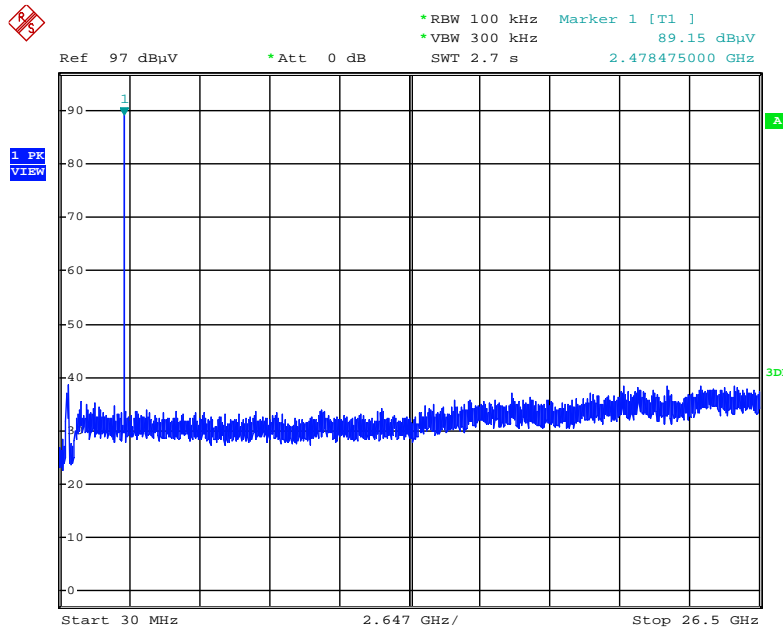


Date: 15.JAN.2016 02:47:03

Plot on Configuration For BR (GFSK) / Channel 78 / 30MHz~2400MHz (down 20dBc)

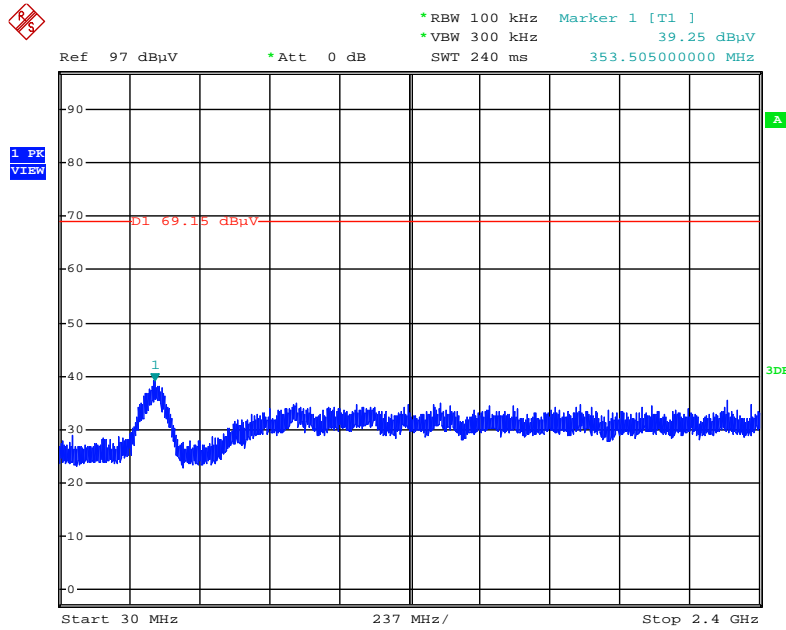


Date: 15.JAN.2016 02:47:36

Plot on Configuration For BR (GFSK) / Channel 78 / 2483.5MHz~26500MHz (down 20dBc)

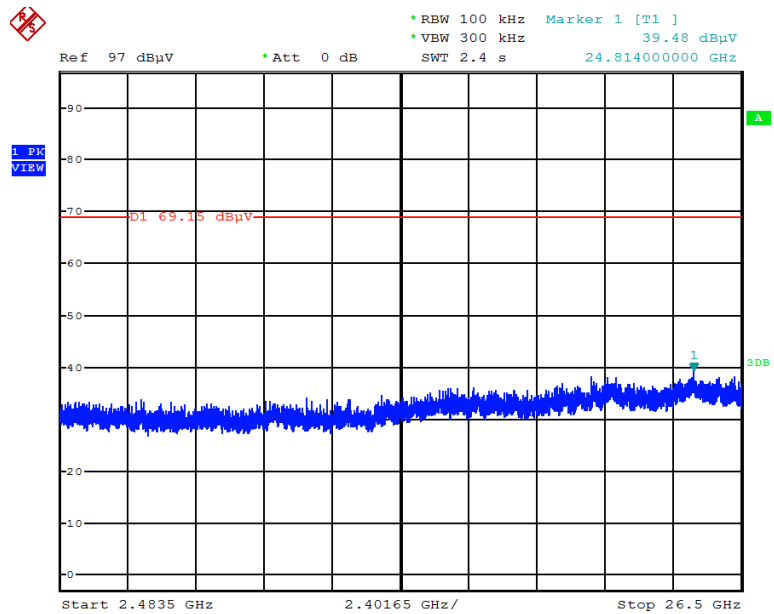


Date: 15.JAN.2016 02:47:56

Plot on Configuration For BR (GFSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)

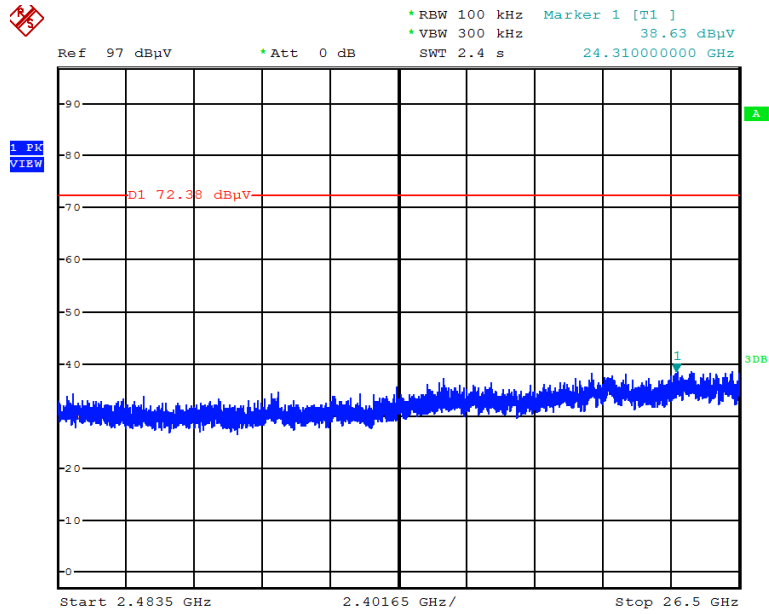


Date: 15.JAN.2016 02:50:06

Plot on Configuration For EDR (8DPSK) / Channel 0 / Reference Level

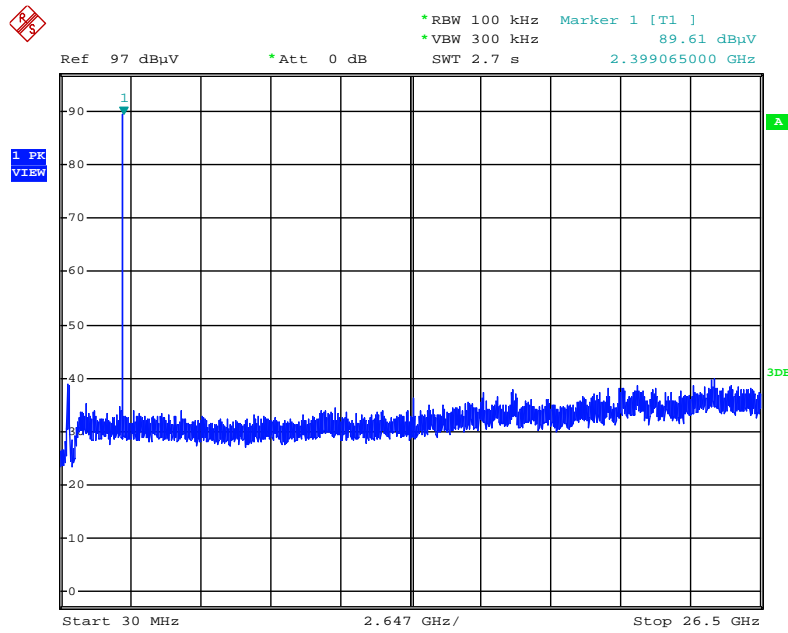


Date: 15.JAN.2016 02:52:32

Plot on Configuration For EDR (8DPSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)

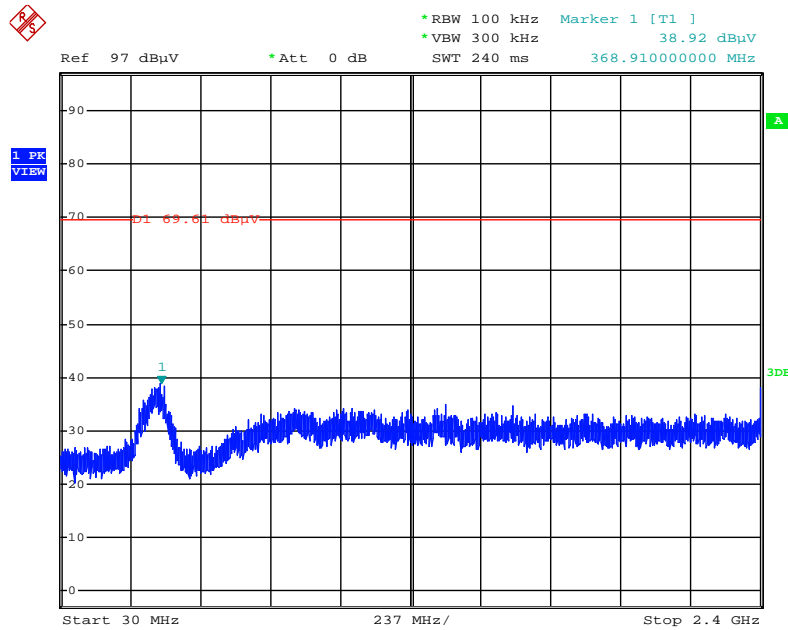


Date: 15.JAN.2016 02:53:00

Plot on Configuration For EDR (8DPSK) / Channel 0 / 2483.5MHz~26500MHz (down 20dBc)

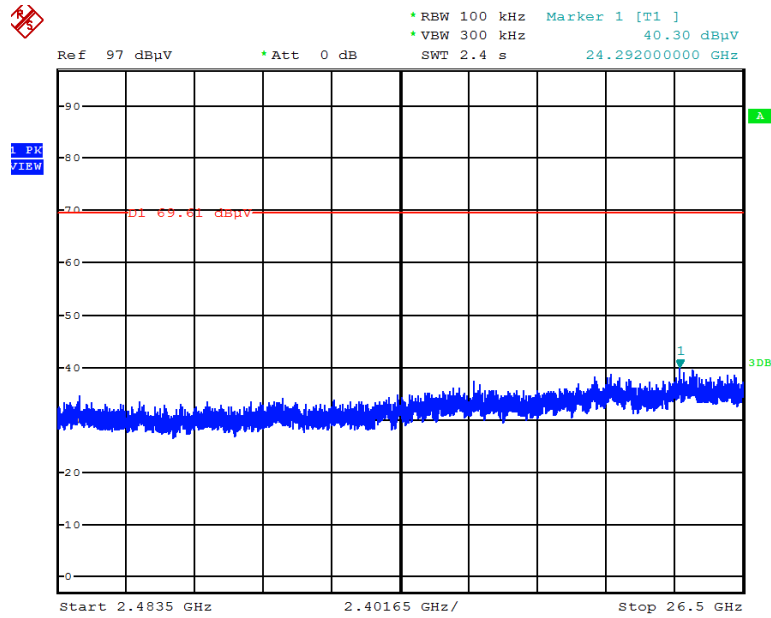


Date: 15.JAN.2016 02:53:20

Plot on Configuration For EDR (8DPSK) / Channel 78 / Reference Level

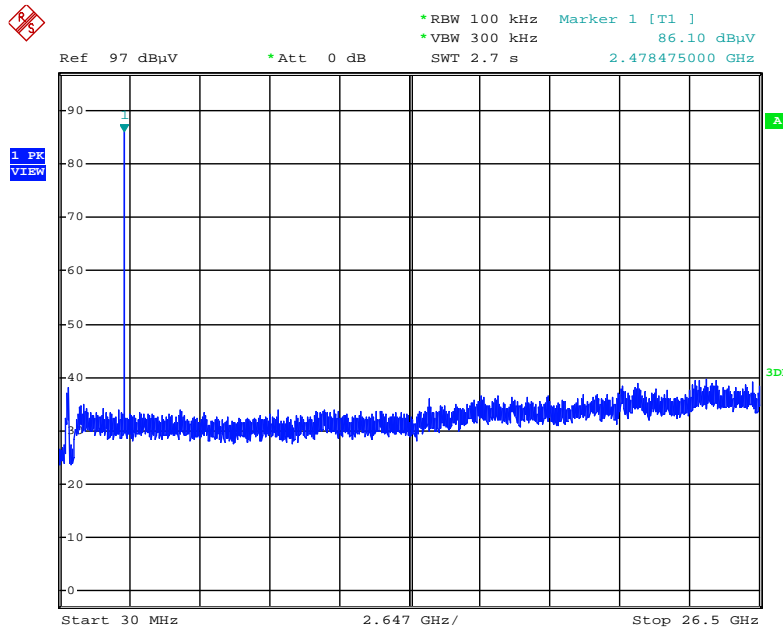


Date: 15.JAN.2016 02:53:54

Plot on Configuration For EDR (8DPSK) / Hopping / Reference Level

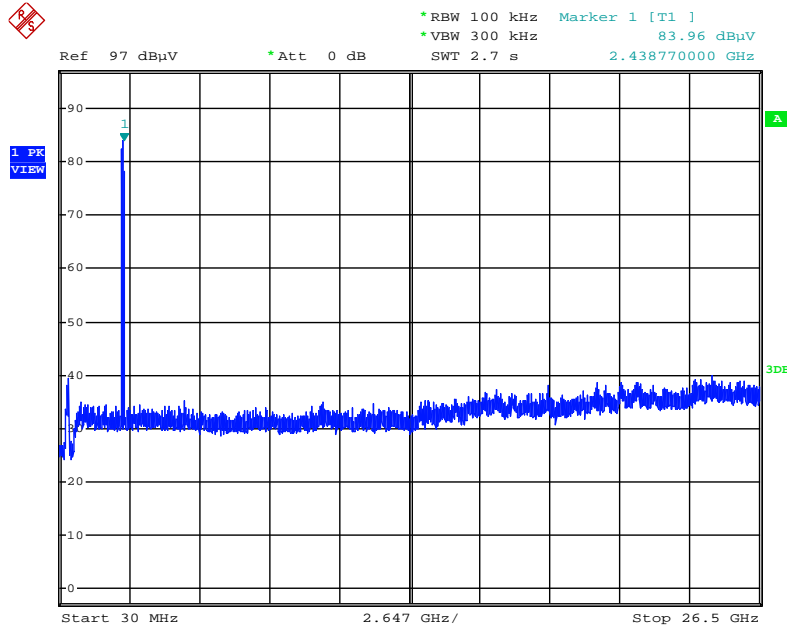


Date: 15.JAN.2016 02:55:38

Plot on Configuration For EDR (8DPSK) / Hopping / 30MHz~2400MHz (down 20dBc)

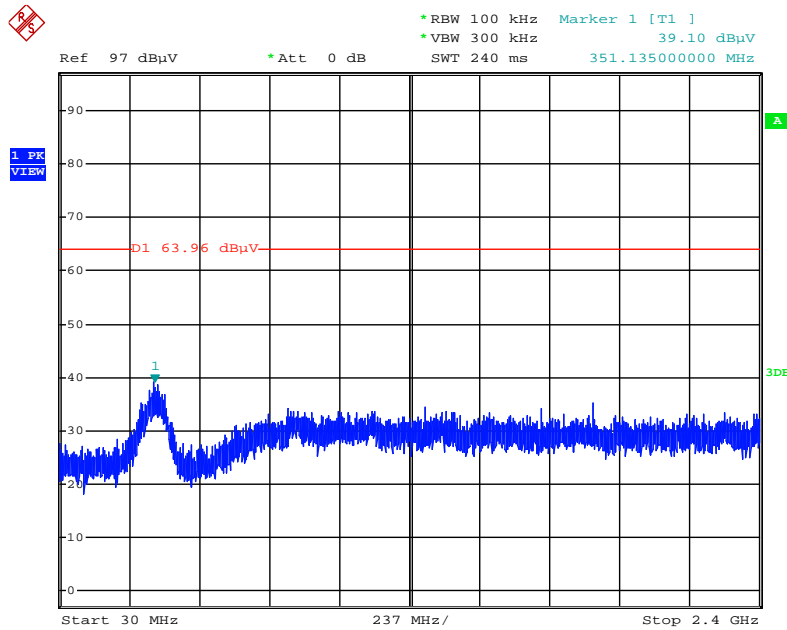


Date: 15.JAN.2016 02:55:57

Plot on Configuration For EDR (8DPSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)

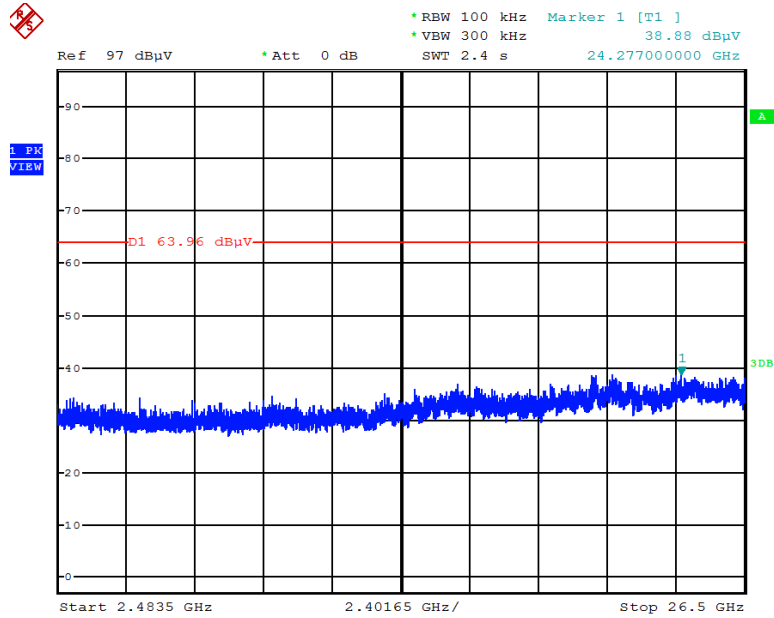


Date: 15.JAN.2016 02:56:16

Plot on Configuration For BR (GFSK) / Channel 78 / 30MHz~2400MHz (down 20dBc)

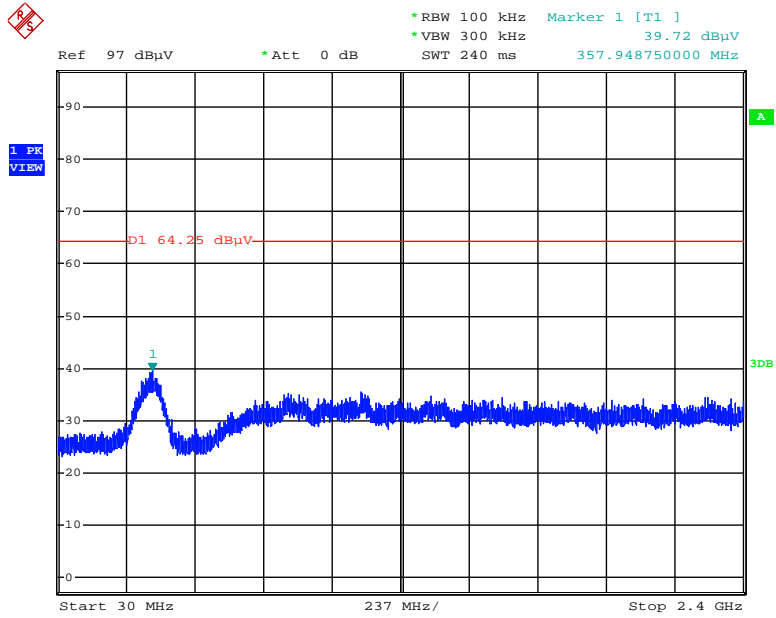


Date: 14.JAN.2016 23:32:01

Plot on Configuration For BR (GFSK) / Channel 78 / 2483.5MHz~26500MHz (down 20dBc)

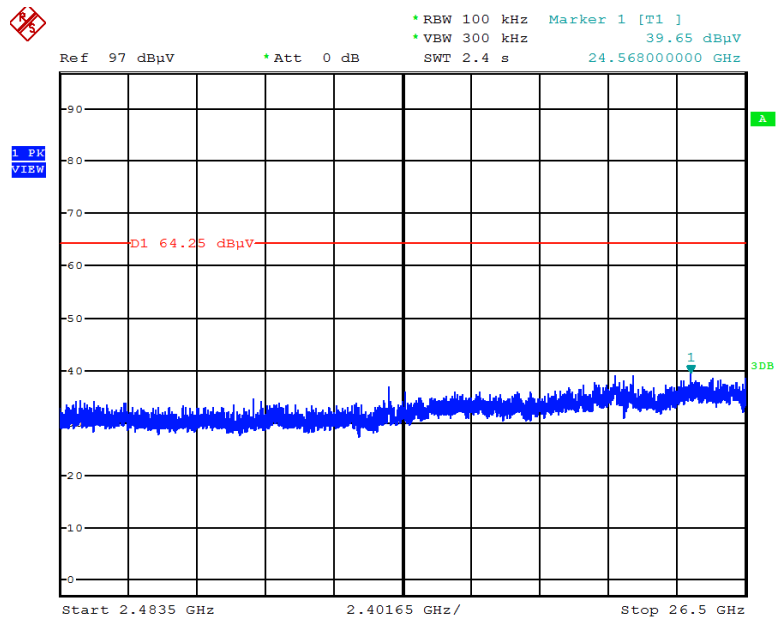


Date: 14.JAN.2016 23:32:32

Plot on Configuration For BR (GFSK) / Hopping / Reference Level

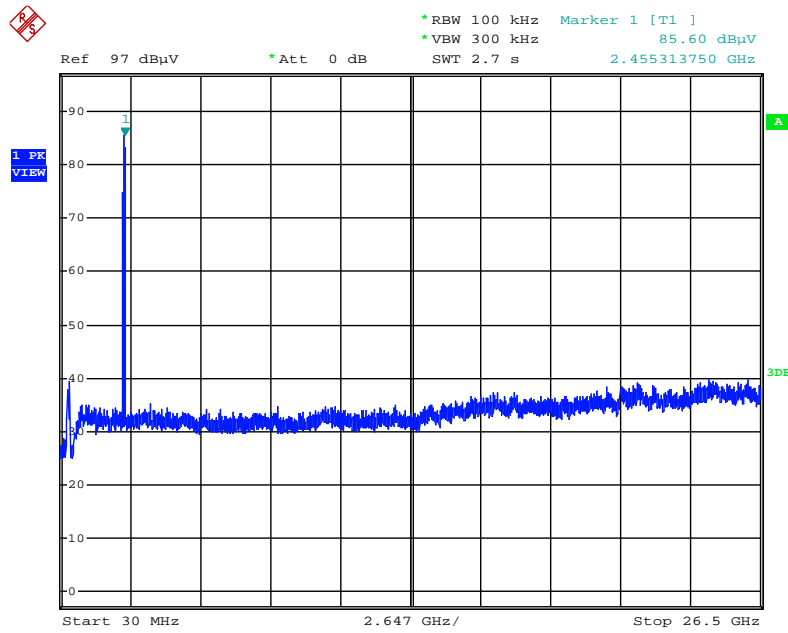


Date: 14.JAN.2016 23:34:34

Plot on Configuration For BR (GFSK) / Hopping / 30MHz~2400MHz (down 20dBc)

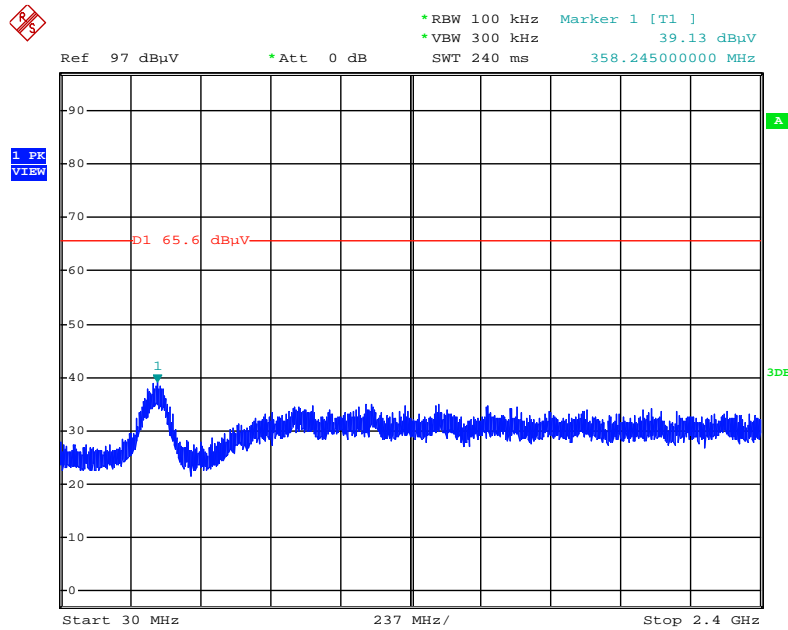


Date: 14.JAN.2016 23:35:34

Plot on Configuration For BR (GFSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)

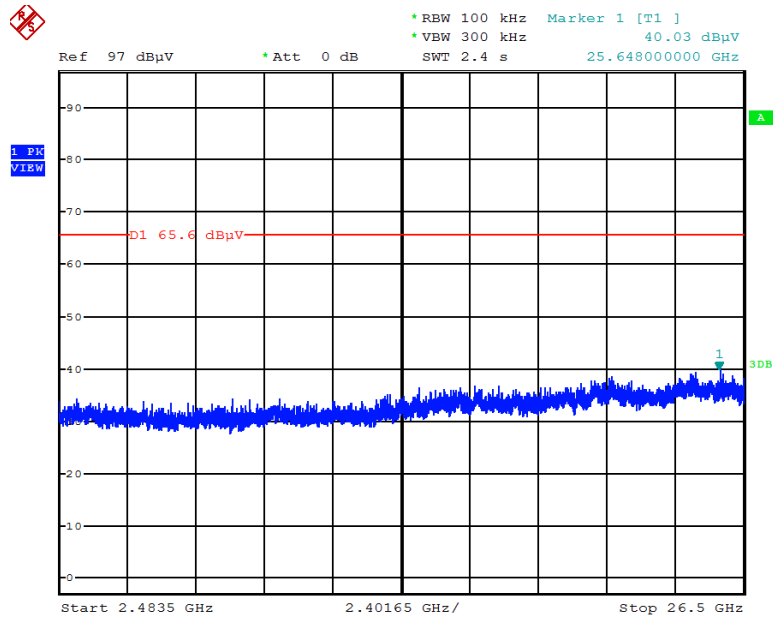


Date: 14.JAN.2016 23:36:06

Plot on Configuration For EDR (8DPSK) / Channel 0 / Reference Level

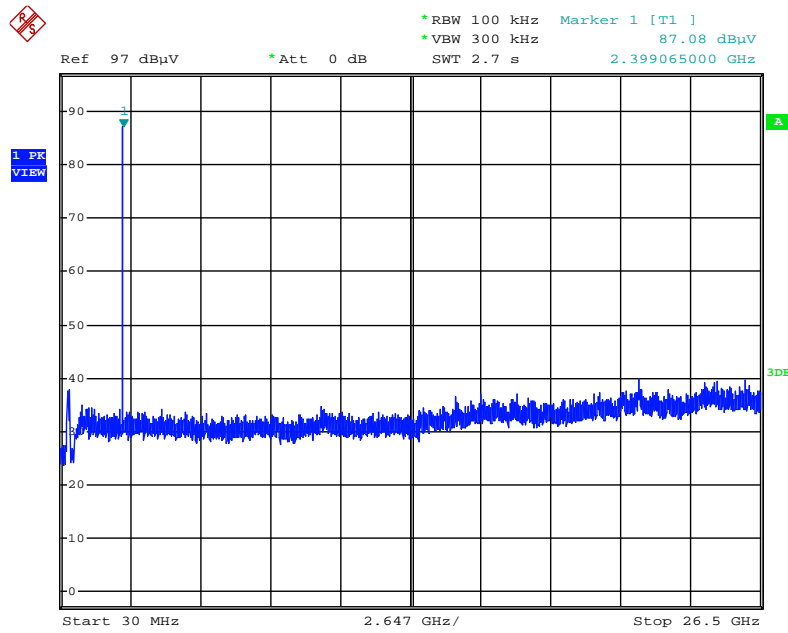


Date: 14.JAN.2016 23:42:29

Plot on Configuration For EDR (8DPSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)

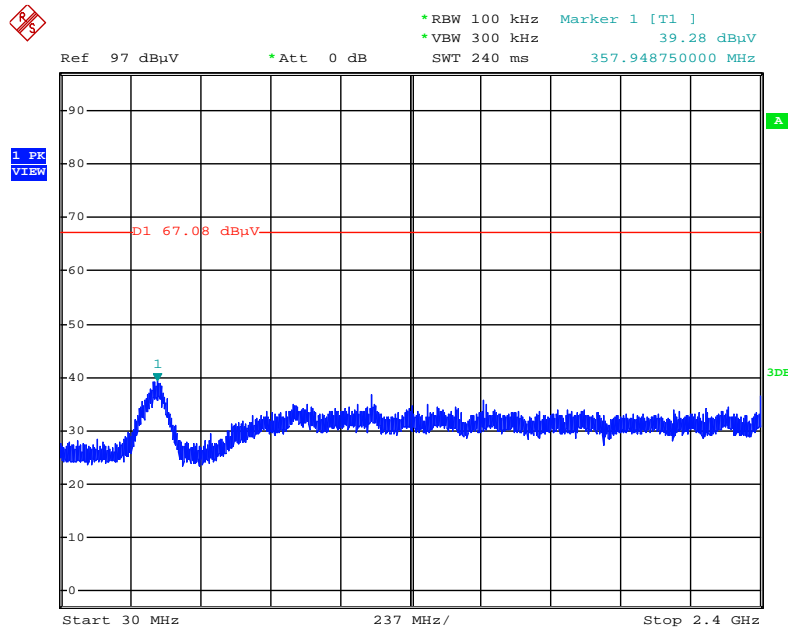


Date: 14.JAN.2016 23:43:26

Plot on Configuration For EDR (8DPSK) / Channel 0 / 2483.5MHz~26500MHz (down 20dBc)

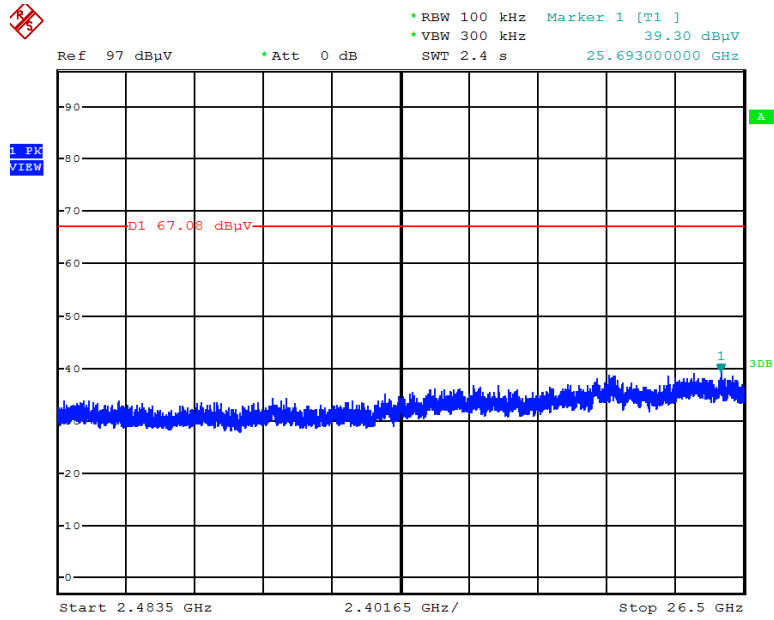


Date: 14.JAN.2016 23:44:14

Plot on Configuration For EDR (8DPSK) / Channel 78 / Reference Level

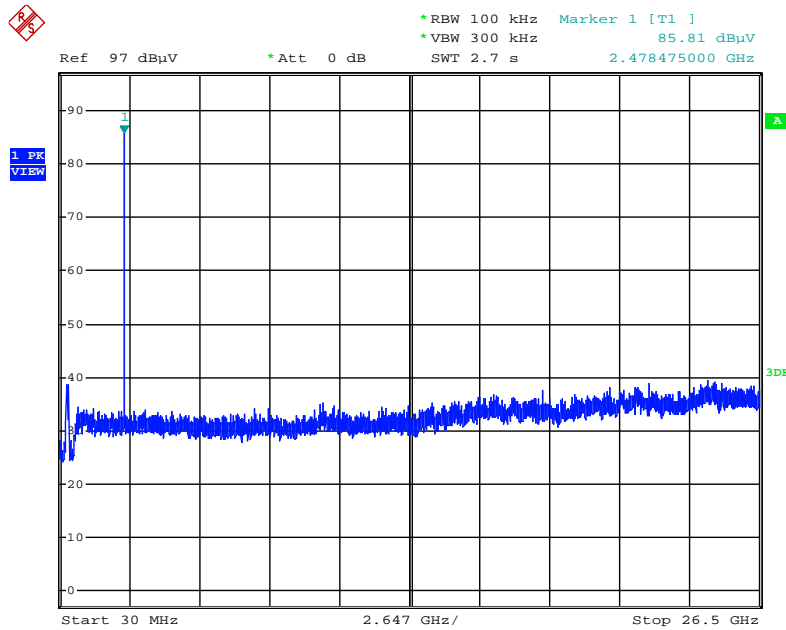


Date: 14.JAN.2016 23:45:50

Plot on Configuration For EDR (8DPSK) / Hopping / Reference Level

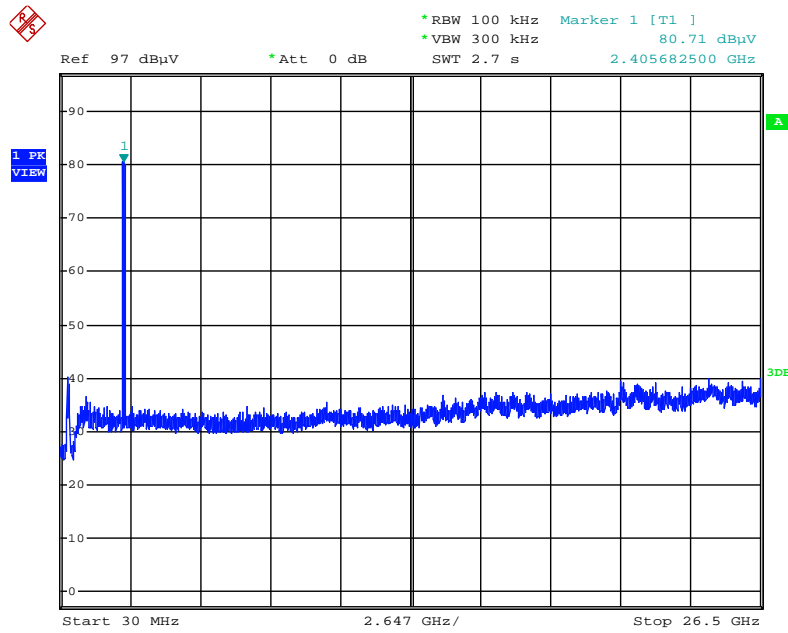


Date: 15.JAN.2016 00:16:04

Plot on Configuration For EDR (8DPSK) / Hopping / 30MHz~2400MHz (down 20dBc)

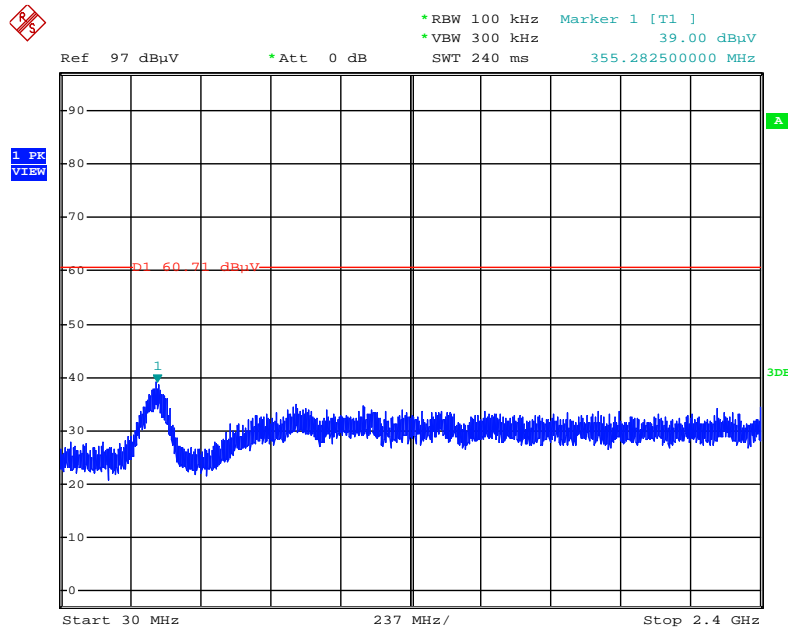

Date: 15.JAN.2016 00:16:37


Plot on Configuration For EDR (8DPSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)

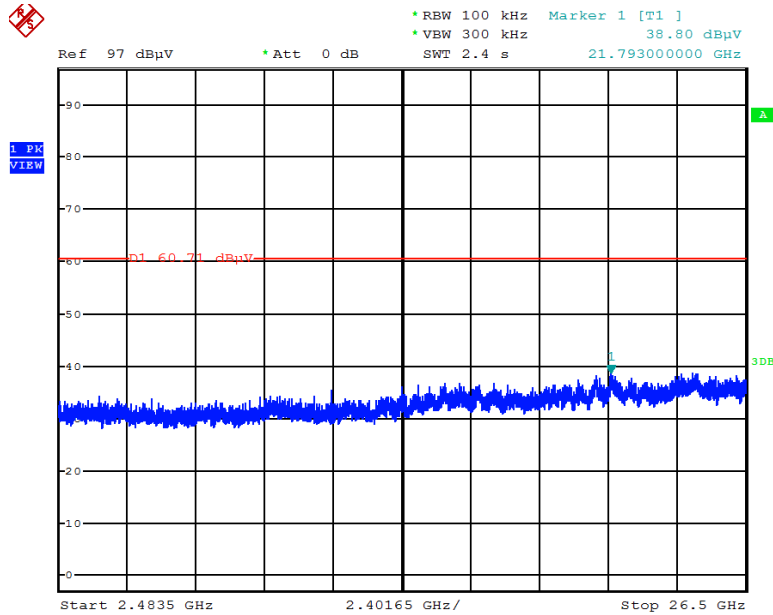

Date: 15.JAN.2016 00:17:02


Test Mode: Mode 3

Plot on Configuration For BR (GFSK) / Channel 0 / Reference Level

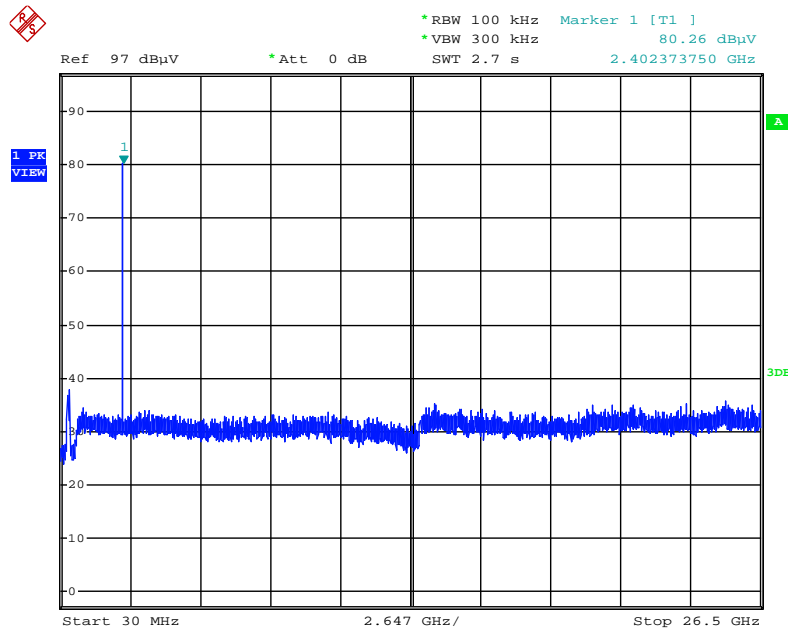


Date: 10.JAN.2016 14:37:50

Plot on Configuration For BR (GFSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)

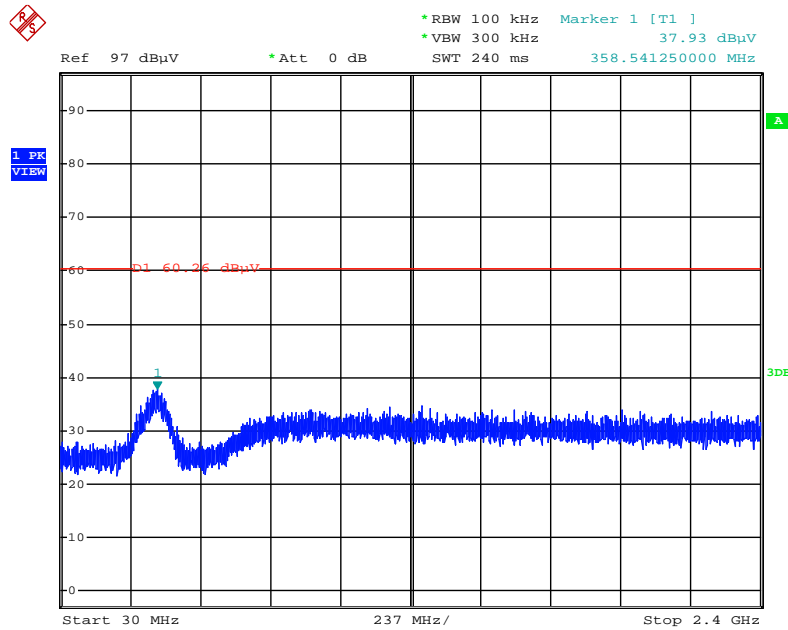


Date: 10.JAN.2016 14:39:43

Plot on Configuration For BR (GFSK) / Channel 0 / 2483.5MHz~26500MHz (down 20dBc)

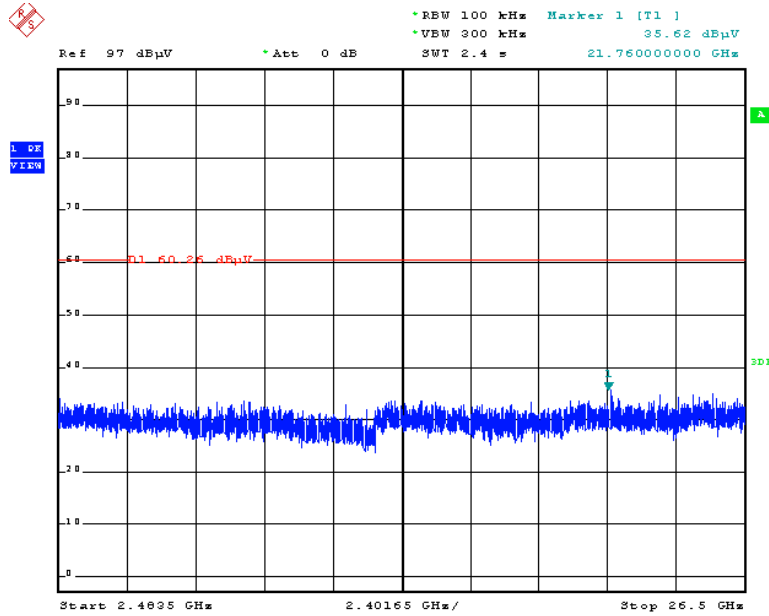


Date: 10.JAN.2016 14:40:12

Plot on Configuration For BR (GFSK) / Channel 78 / Reference Level

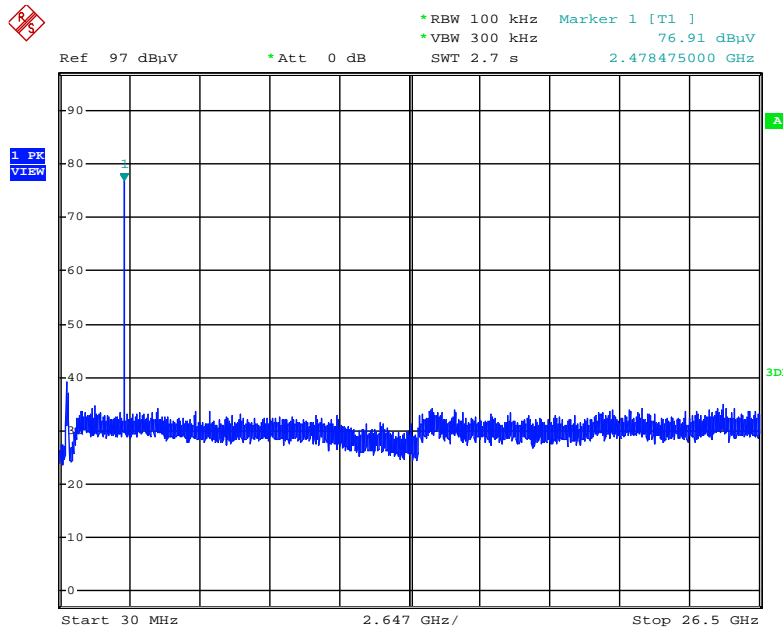


Date: 10.JAN.2016 14:45:24

Plot on Configuration For BR (GFSK) / Channel 78 / 30MHz~2400MHz (down 20dBc)

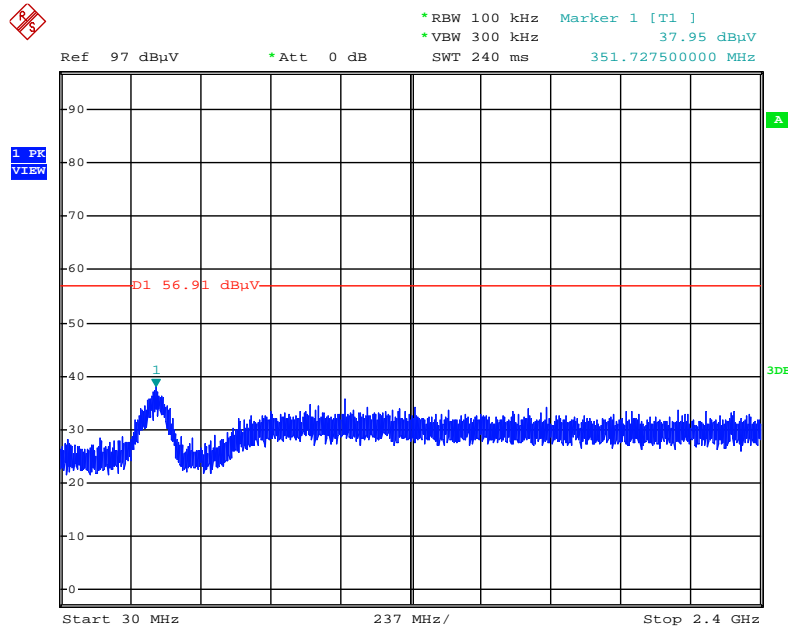


Date: 10.JAN.2016 14:46:05

Plot on Configuration For BR (GFSK) / Channel 78 / 2483.5MHz~26500MHz (down 20dBc)

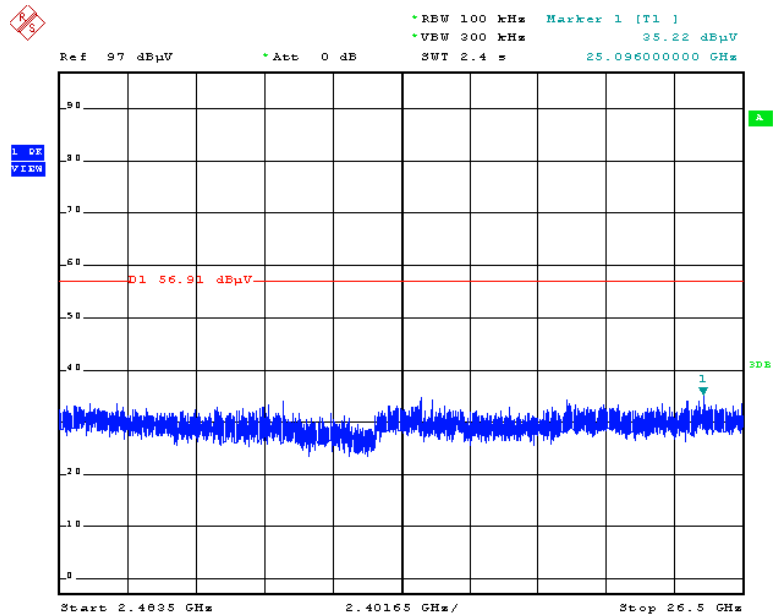


Date: 10.JAN.2016 14:46:35

Plot on Configuration For BR (GFSK) / Hopping / Reference Level

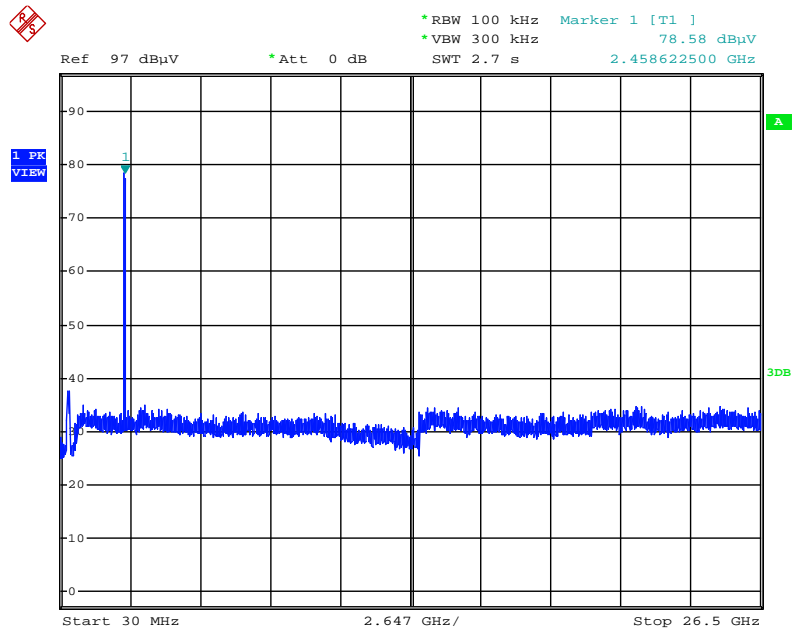


Date: 10.JAN.2016 14:48:17

Plot on Configuration For BR (GFSK) / Hopping / 30MHz~2400MHz (down 20dBc)

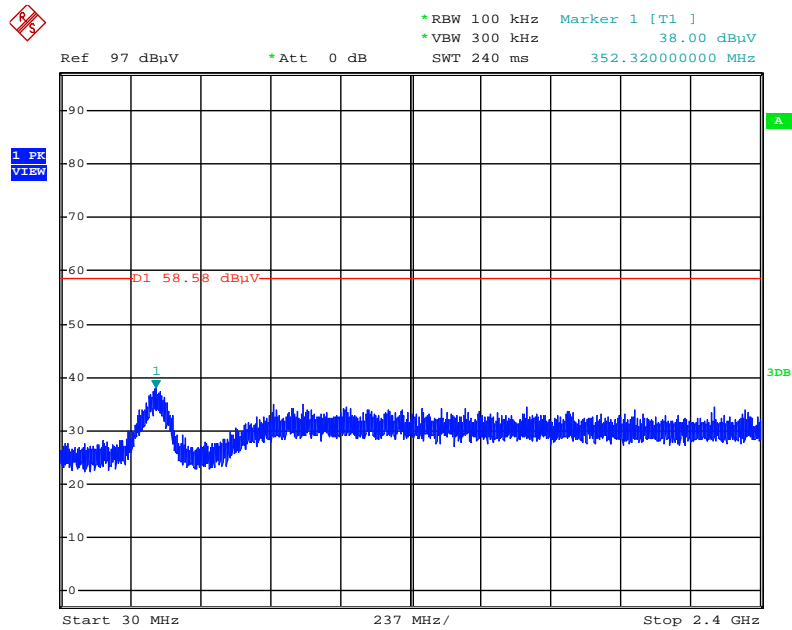


Date: 10.JAN.2016 14:48:53

Plot on Configuration For BR (GFSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)

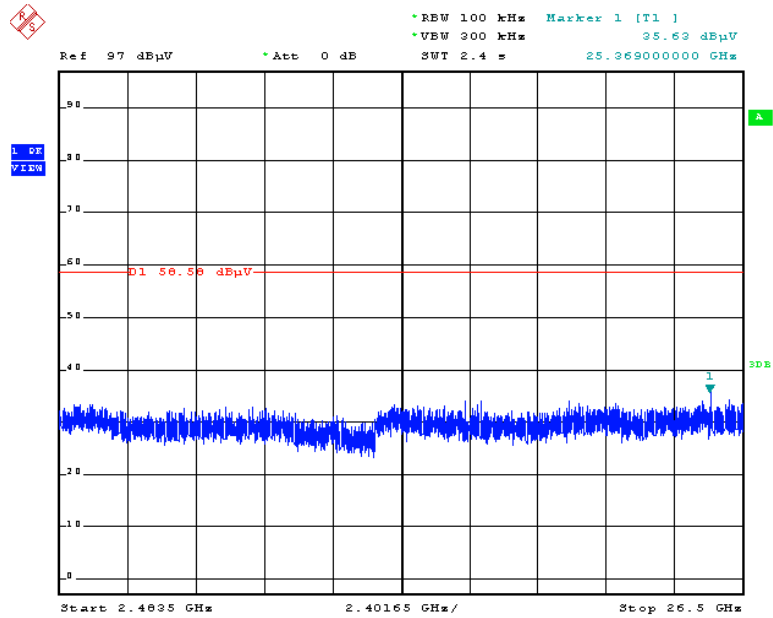


Date: 10.JAN.2016 14:49:20

Plot on Configuration For EDR (8DPSK) / Channel 0 / Reference Level

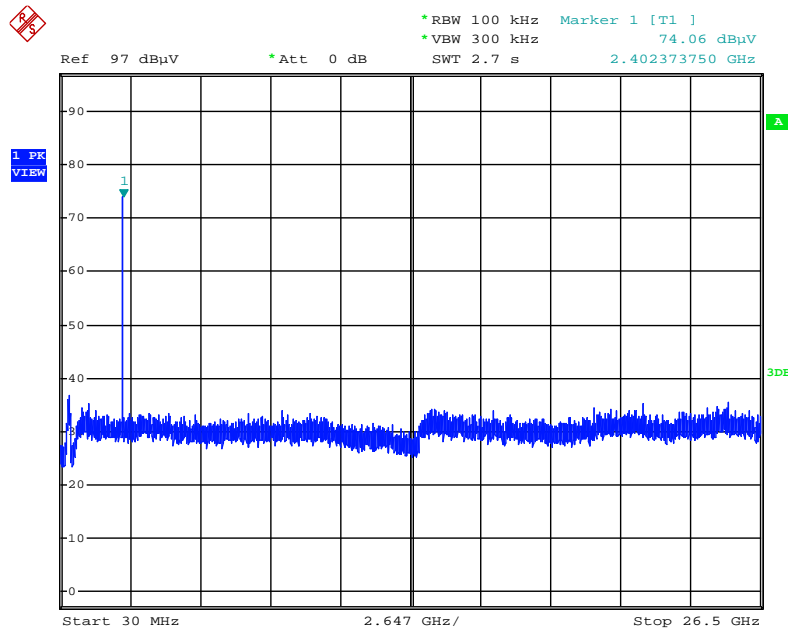


Date: 10.JAN.2016 15:50:22

Plot on Configuration For EDR (8DPSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)

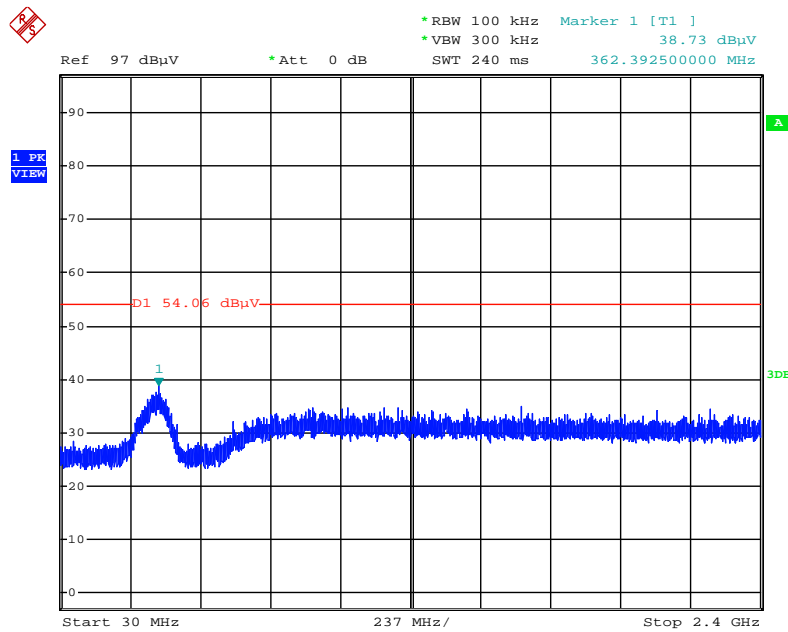


Date: 10.JAN.2016 15:51:02

Plot on Configuration For EDR (8DPSK) / Channel 0 / 2483.5MHz~26500MHz (down 20dBc)

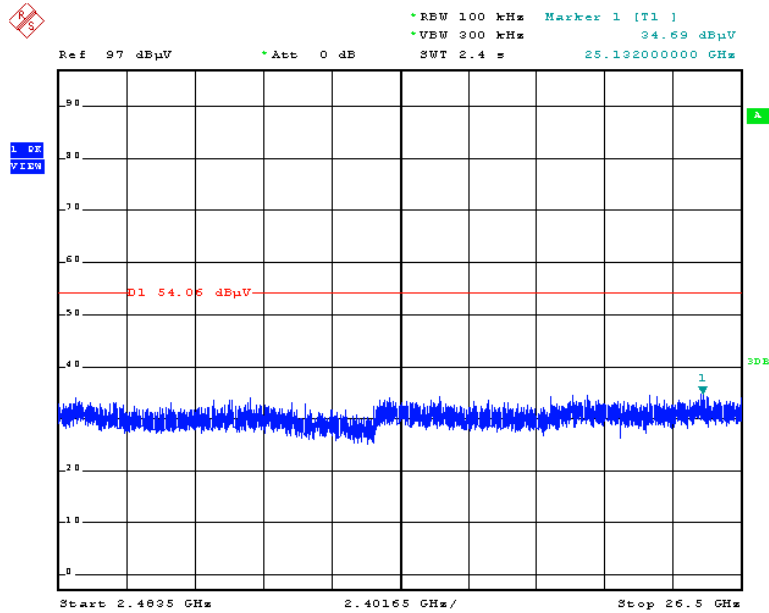


Date: 10.JAN.2016 15:51:28

Plot on Configuration For EDR (8DPSK) / Channel 78 / Reference Level

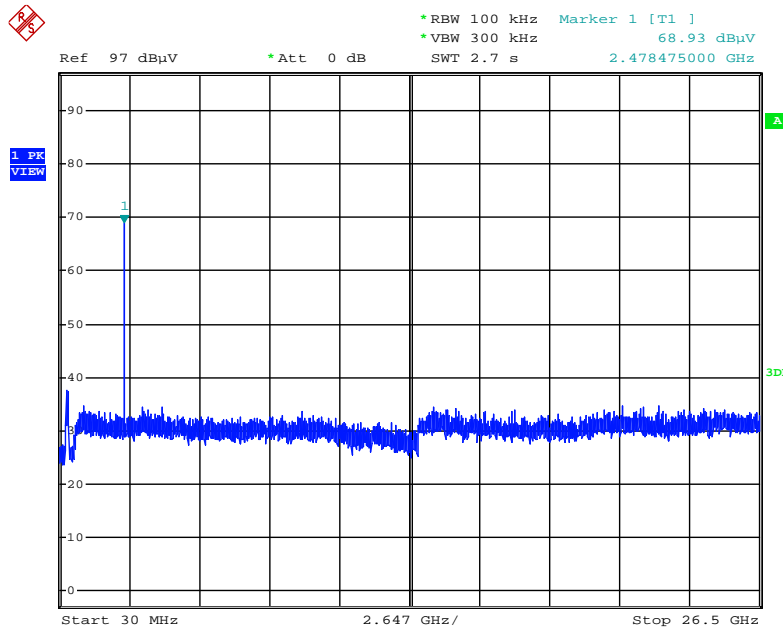


Date: 10.JAN.2016 15:52:29

Plot on Configuration For EDR (8DPSK) / Channel 78 / 30MHz~2400MHz (down 20dBc)

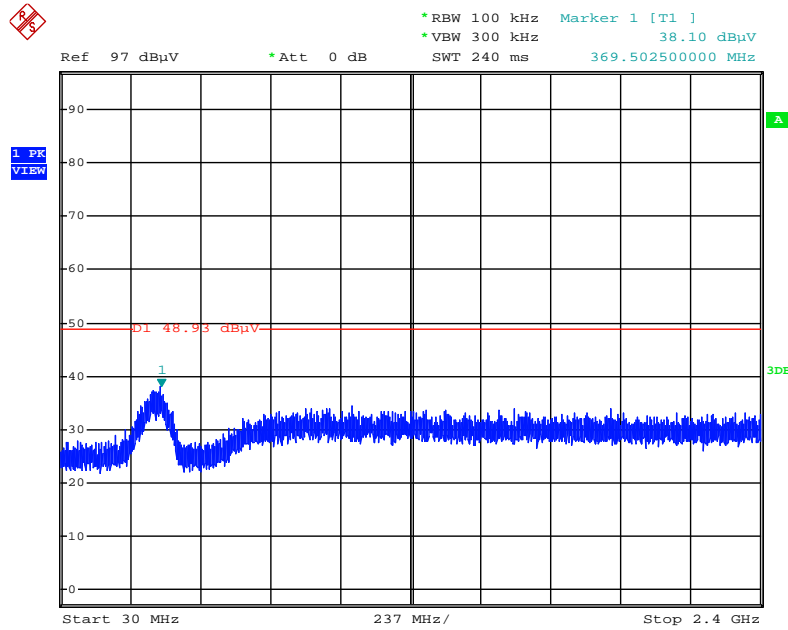


Date: 10.JAN.2016 15:53:02

Plot on Configuration For EDR (8DPSK) / Channel 78 / 2483.5MHz~26500MHz (down 20dBc)

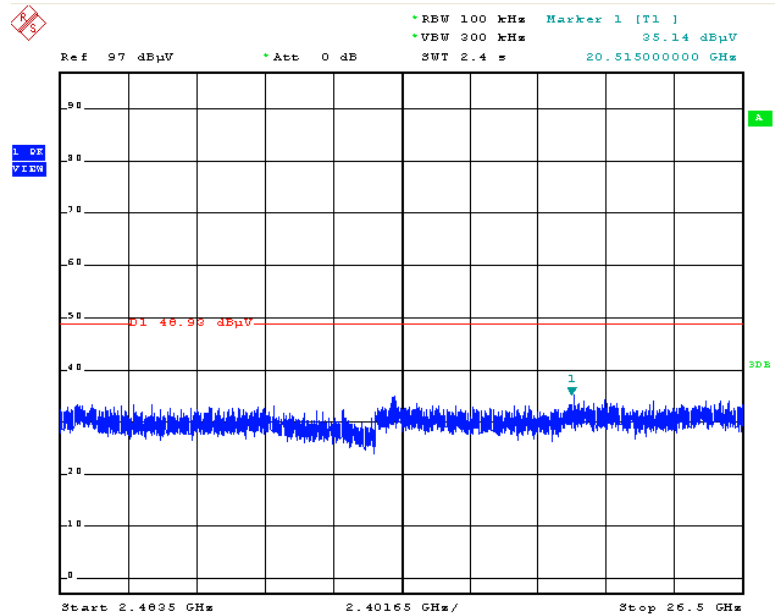


Date: 10.JAN.2016 15:53:30

Plot on Configuration For EDR (8DPSK) / Hopping / Reference Level

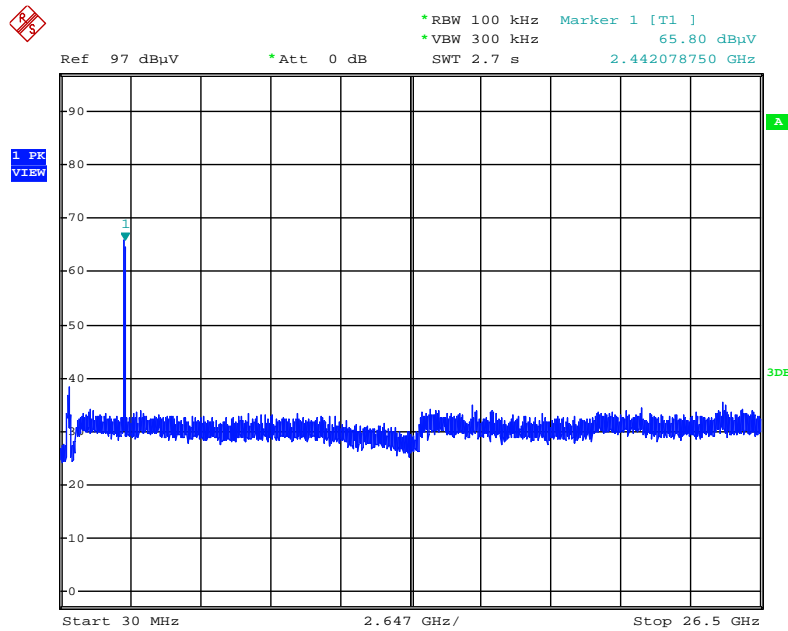


Date: 10.JAN.2016 15:54:40

Plot on Configuration For EDR (8DPSK) / Hopping / 30MHz~2400MHz (down 20dBc)

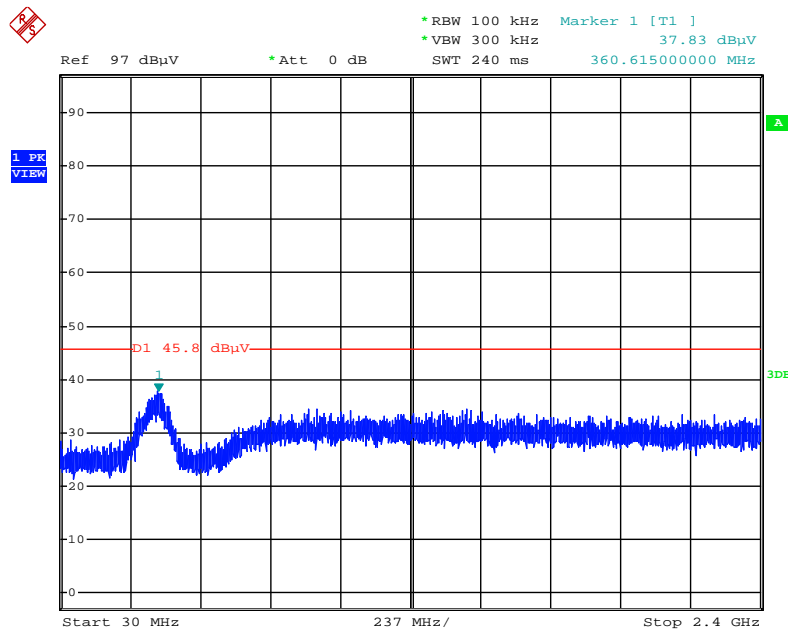


Date: 10.JAN.2016 15:55:21

Plot on Configuration For EDR (8DPSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)

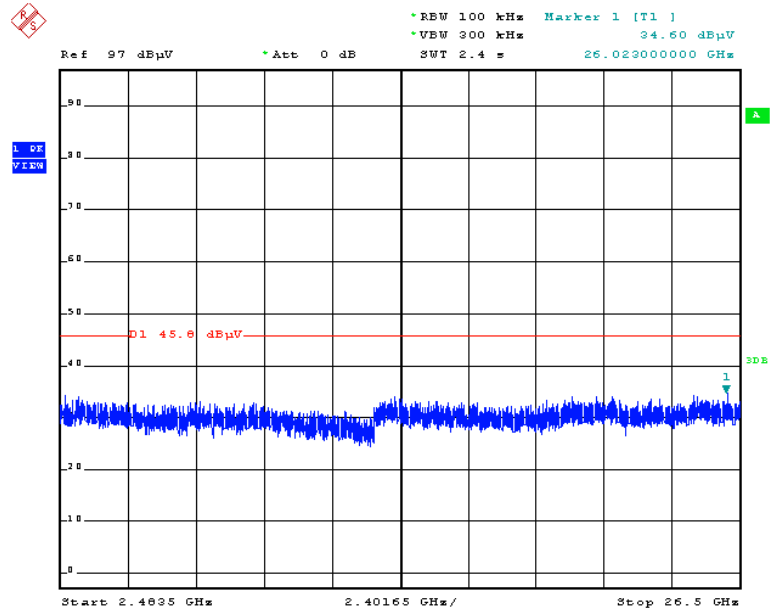


Date: 10.JAN.2016 15:56:00

Plot on Configuration For BR (GFSK) / Channel 0 / 2483.5MHz~26500MHz (down 20dBc)

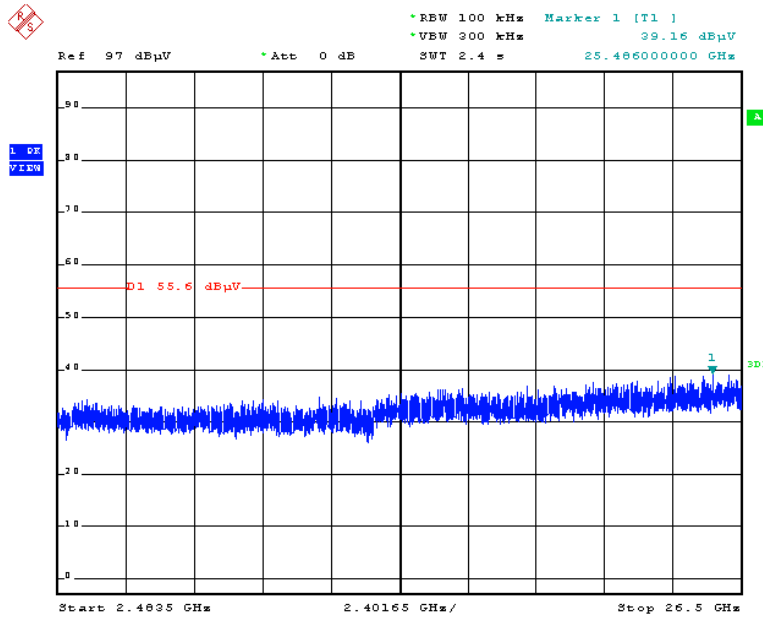


Date: 11.JAN.2016 17:20:57

Plot on Configuration For BR (GFSK) / Channel 78 / Reference Level

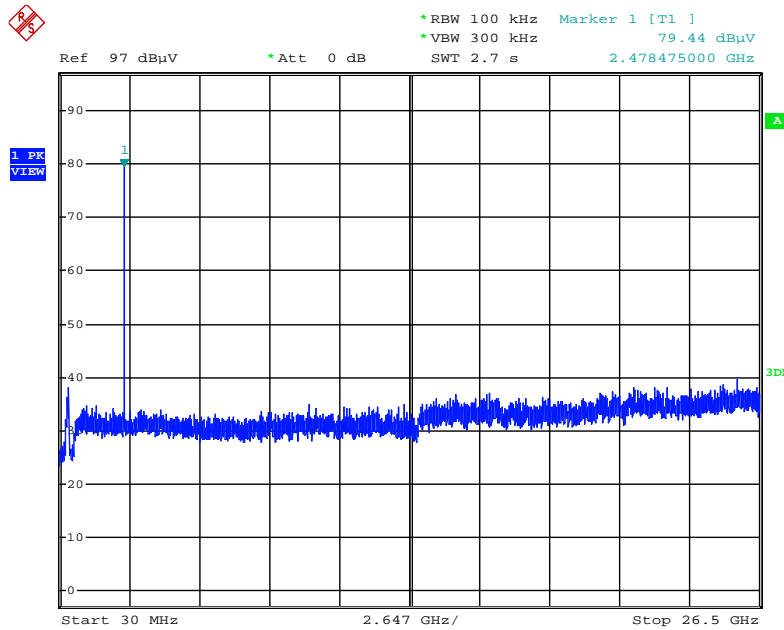


Date: 11.JAN.2016 17:56:33

Plot on Configuration For BR (GFSK) / Hopping / Reference Level

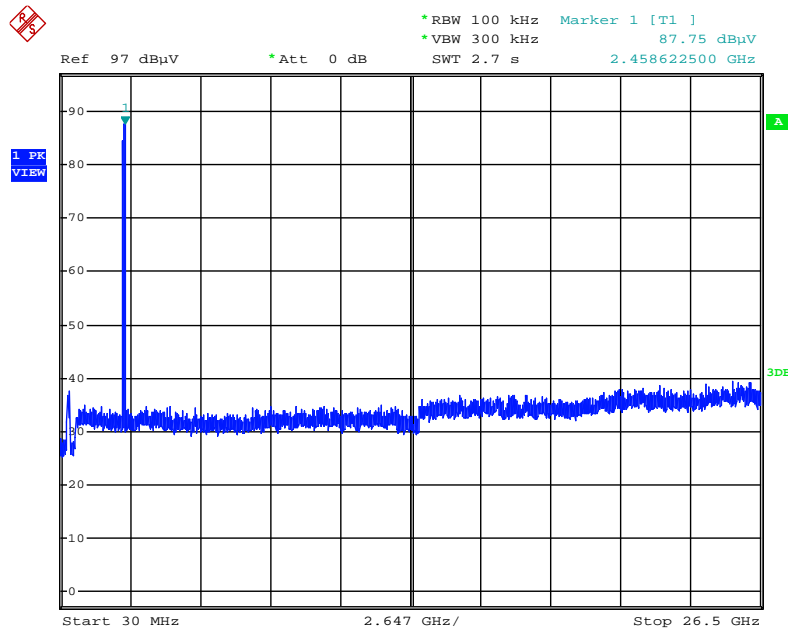


Date: 11.JAN.2016 18:15:36

Plot on Configuration For BR (GFSK) / Hopping / 30MHz~2400MHz (down 20dBc)

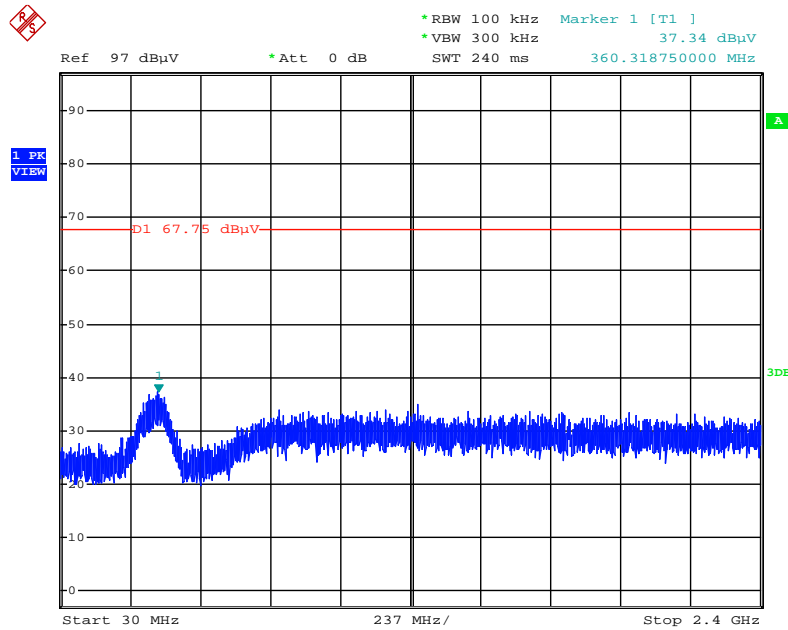


Date: 11.JAN.2016 18:16:23

Plot on Configuration For BR (GFSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)

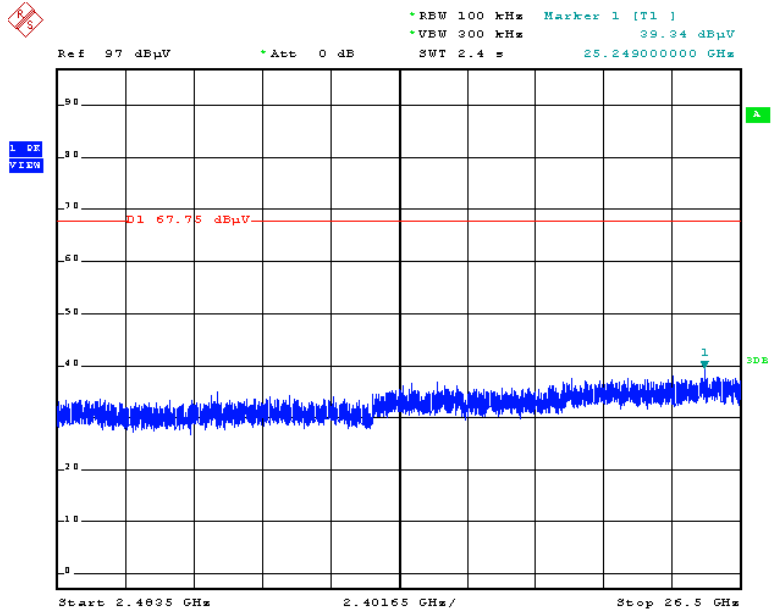


Date: 11.JAN.2016 18:17:00

Plot on Configuration For EDR (8DPSK) / Channel 0 / Reference Level

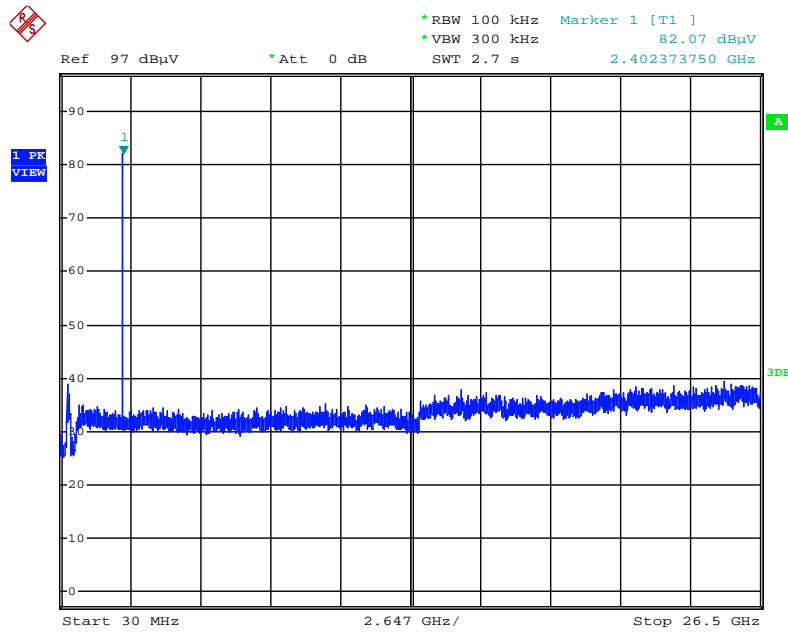


Date: 11.JAN.2016 18:08:45

Plot on Configuration For EDR (8DPSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)

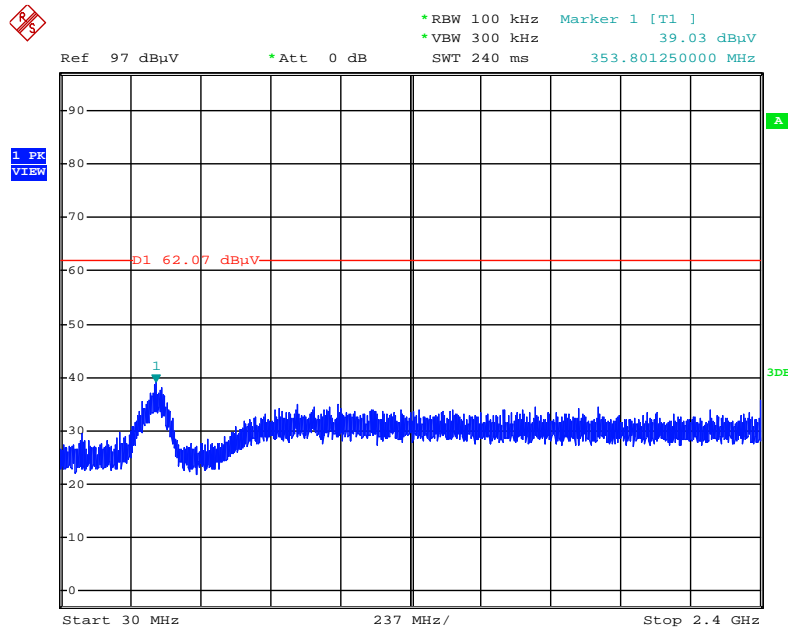


Date: 11.JAN.2016 18:09:31

Plot on Configuration For EDR (8DPSK) / Channel 0 / 2483.5MHz~26500MHz (down 20dBc)

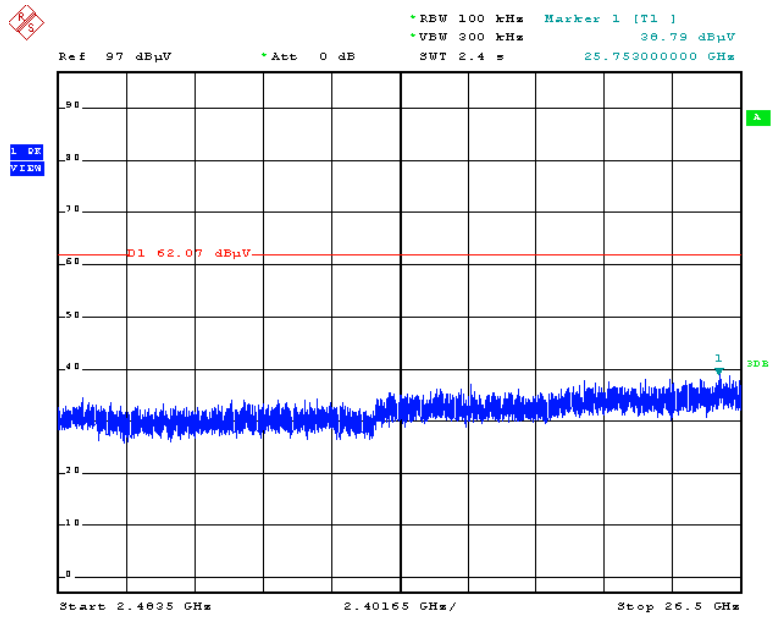


Date: 11.JAN.2016 18:10:00

Plot on Configuration For EDR (8DPSK) / Channel 78 / Reference Level

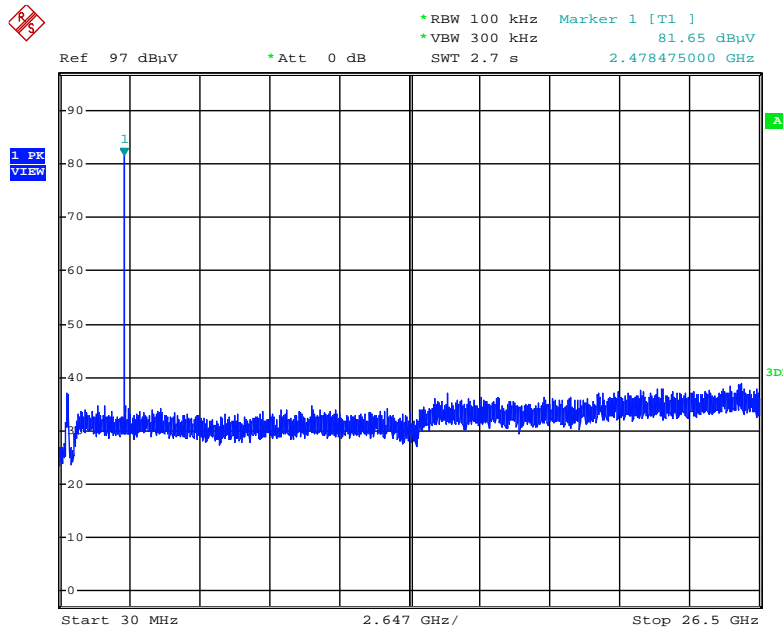


Date: 11.JAN.2016 18:11:48

Plot on Configuration For EDR (8DPSK) / Channel 78 / 30MHz~2400MHz (down 20dBc)

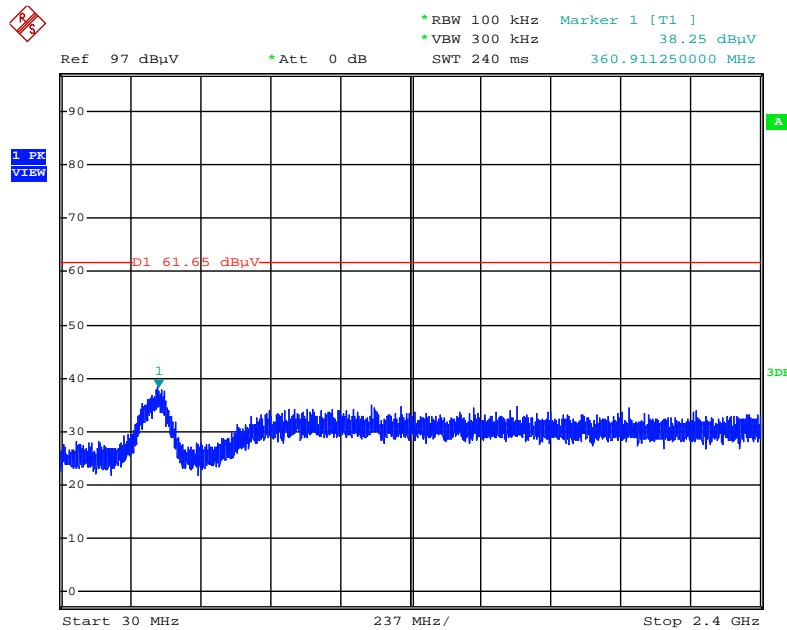


Date: 11.JAN.2016 18:12:29

Plot on Configuration For EDR (8DPSK) / Channel 78 / 2483.5MHz~26500MHz (down 20dBc)

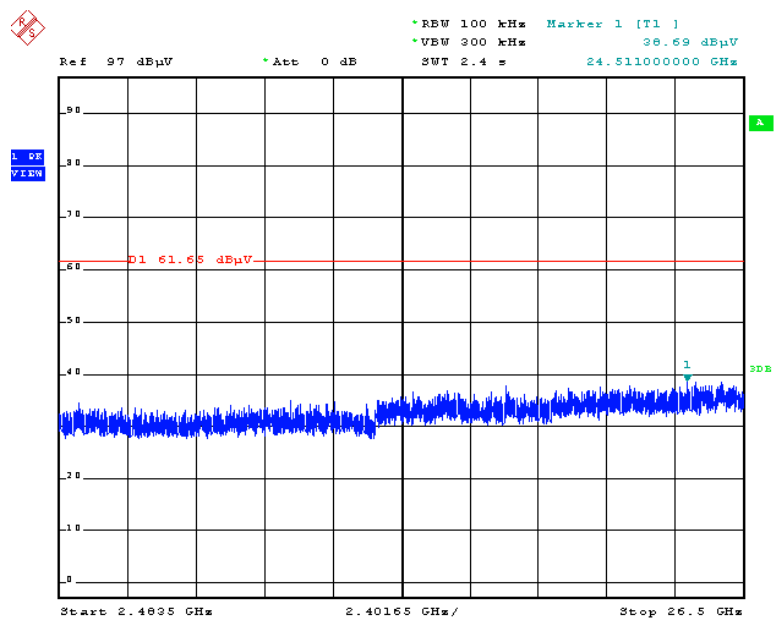


Date: 11.JAN.2016 18:13:07

Plot on Configuration For EDR (8DPSK) / Hopping / Reference Level

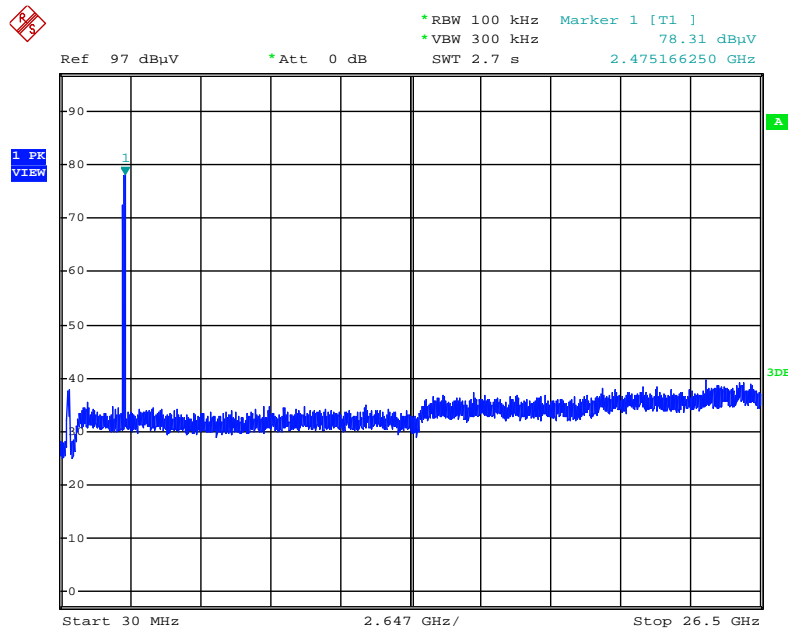


Date: 11.JAN.2016 18:18:28

Plot on Configuration For EDR (8DPSK) / Hopping / 30MHz~2400MHz (down 20dBc)

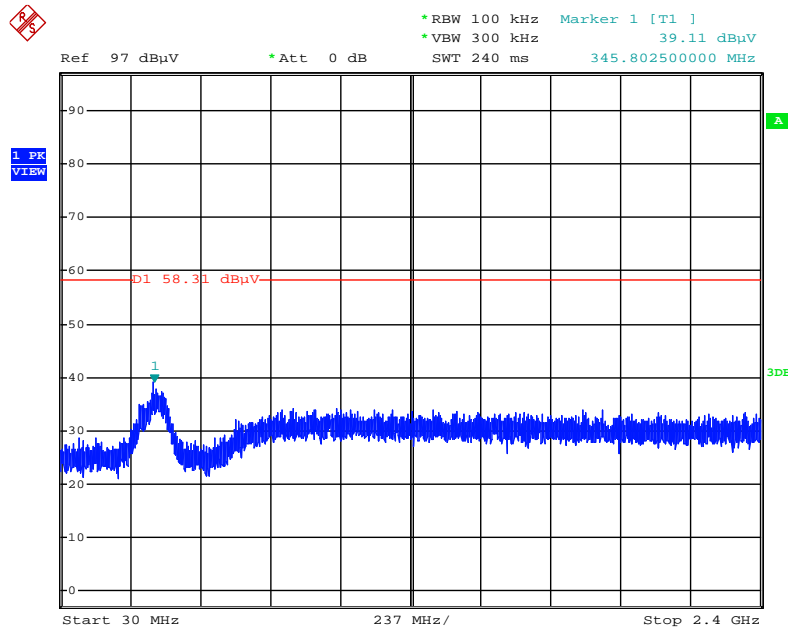

Date: 11.JAN.2016 18:19:13

Plot on Configuration For EDR (8DPSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)

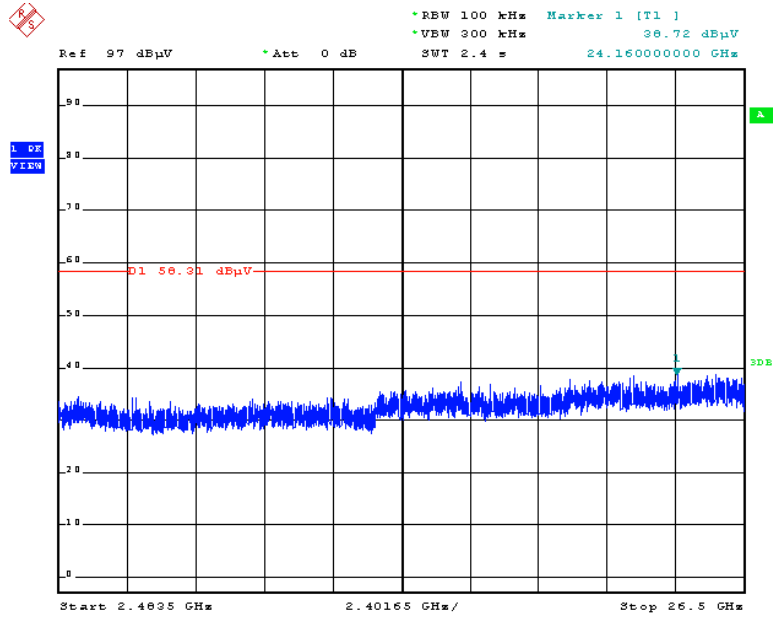

Date: 11.JAN.2016 18:19:51

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 25, 2015	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02099	1GHz ~ 26.5GHz	Dec. 07, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 21, 2015	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	Apr. 22, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

* Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%