

# FCC SAR TEST REPORT

FCC ID : TX2-RTL8822C  
Equipment : Module  
Brand Name : Realtek  
Model Name : RTL8822C  
Marketing Name : 11a/b/g/n/ac RTL8822C Combo module  
Applicant : Realtek Semiconductor Corp.  
No. 2, Innovation Road II, Hsinchu Science Park,  
Hsinchu 300, Taiwan  
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Sep. 06, 2022 and testing was started from Sep. 23, 2022 and completed on Oct. 14, 2022. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



**Table of Contents**

**1. Statement of Compliance ..... 4**

**2. Guidance Applied..... 4**

**3. Equipment Under Test (EUT) Information ..... 5**

    3.1 General Information ..... 5

**4. RF Exposure Limits..... 6**

    4.1 Uncontrolled Environment..... 6

    4.2 Controlled Environment..... 6

**5. Specific Absorption Rate (SAR)..... 7**

    5.1 Introduction ..... 7

    5.2 SAR Definition..... 7

**6. System Description and Setup ..... 8**

    6.1 Test Site Location..... 8

    6.2 E-Field Probe ..... 9

    6.3 Data Acquisition Electronics (DAE) ..... 9

    6.4 Phantom.....10

    6.5 Device Holder..... 11

**7. Measurement Procedures .....12**

    7.1 Spatial Peak SAR Evaluation .....12

    7.2 Power Reference Measurement.....13

    7.3 Area Scan .....13

    7.4 Zoom Scan.....14

    7.5 Volume Scan Procedures.....14

    7.6 Power Drift Monitoring.....14

**8. Test Equipment List .....15**

**9. System Verification .....16**

    9.1 Tissue Verification .....16

    9.2 System Performance Check Results.....17

**10. WiFi/Bluetooth Output Power (Unit: dBm) .....18**

**11. Antenna Location .....23**

**12. SAR Test Results .....25**

    12.1 Body SAR .....26

    12.2 Extremity SAR.....28

    12.3 Repeated SAR Measurement .....30

**13. Simultaneous Transmission Analysis.....30**

    13.1 Body Exposure Conditions.....31

    13.2 Extremity Exposure Conditions .....31

**14. Uncertainty Assessment .....32**

**15. References .....32**

**Appendix A. Plots of System Performance Check**

**Appendix B. Plots of High SAR Measurement**

**Appendix C. DASY Calibration Certificate**

**Appendix D. Test Setup Photos**



### History of this test report

Report No.	Version	Description	Issued Date
FA290129	01	Initial issue of report	Nov. 01, 2022



### 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Realtek Semiconductor Corp., Module, RTL8822C, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary		Highest Simultaneous Transmission	
			Body (Separation 0mm)	Extremity (Separation 0mm)	Body (Separation 0mm)	Extremity (Separation 0mm)
			1g SAR (W/kg)	10g SAR (W/kg)	1g SAR (W/kg)	10g SAR (W/kg)
DTS	WLAN	2.4GHz WLAN	0.70	0.39	1.12	0.74
NII		5GHz WLAN	1.06	0.98	1.06	1.53
DSS	2.4GHz Band	Bluetooth	0.01	0.01	1.06	0.56
Date of Testing:			2022/9/23 ~ 2022/10/14			

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Extremity 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

**Reviewed by: Jason Wang**  
**Report Producer: Carlie Tsai**

### 2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02



### 3. Equipment Under Test (EUT) Information

#### 3.1 General Information

Product Feature & Specification	
Equipment Name	Module
Brand Name	Realtek
Model Name	RTL8822C
Marketing Name	11a/b/g/n/ac RTL8822C Combo module
FCC ID	TX2-RTL8822C
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
<b>Remark:</b>	
1. This device had three antenna vendors, For RF exposure evaluation is selected HTK as the main tested, AWAN and INPAQ were spot check worst case found in HTK.	

Host Information	
Equipment Name	Steam Deck
Brand Name	Valve
Model Name	1010
EUT Stage	Identical Prototype

Antenna Information									
Sample with INPAQ Technology Co., Ltd.					Sample with Advanced Wireless and Antenna INC.				
INPAQ	Ant. Type	PIFA	connector	SMA RP PLUG	AWAN	Ant. Type	PIFA	connector	20565-001R-13
	Model No.	Main: DQ600015300 (WA-P-LE-02-153)  Aux: DQ600004300 (WA-P-LE-01-043)				Model No.	Main: DQ610001400 (AEP6Y-100014)  Aux: DQ610001500 (AEP6Y-100015)		
	Peak Gain (dBi)					Peak Gain (dBi)			
	2400~2483.5MHz	Main: 1.38 Aux: 1.44	5470~5725MHz	Main: 2.77 Aux: 3.46		2400~2483.5MHz	Main: 1.19 Aux: 2.66	5470~5725MHz	Main: 1.45 Aux: 2.74
	5150~5250MHz	Main: 2.56 Aux: 2.23	5725~5850MHz	Main: 3.64 Aux: 3.53		5150~5250MHz	Main: 0.69 Aux: 1.71	5725~5850MHz	Main: 0.1 Aux: 2.47
5250~5350MHz	Main: 2.56 Aux: 2.23			5250~5350MHz	Main: 0.54 Aux: 1.53				
Sample with High-Tek Harness Enterprise Co Ltd.									
HTK	Ant. Type	PIFA	connector	958-C413-W-B-Bu-A0					
	Model No.	Main: DQ60ACQD0E5 (0ACQD022049N)  Aux: DQ60ACQD0E4 (0ACQD022050N)							
	Peak Gain (dBi)								
	2400~2483.5MHz	Main: -0.44 Aux: 2.76	5470~5725MHz	Main: 2.29 Aux: 2.57					
	5150~5250MHz	Main: 0.86 Aux: 2.35	5725~5850MHz	Main: 2.29 Aux: 1.99					
5250~5350MHz	Main: 1.87 Aux: 2.87								



## 4. RF Exposure Limits

### 4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

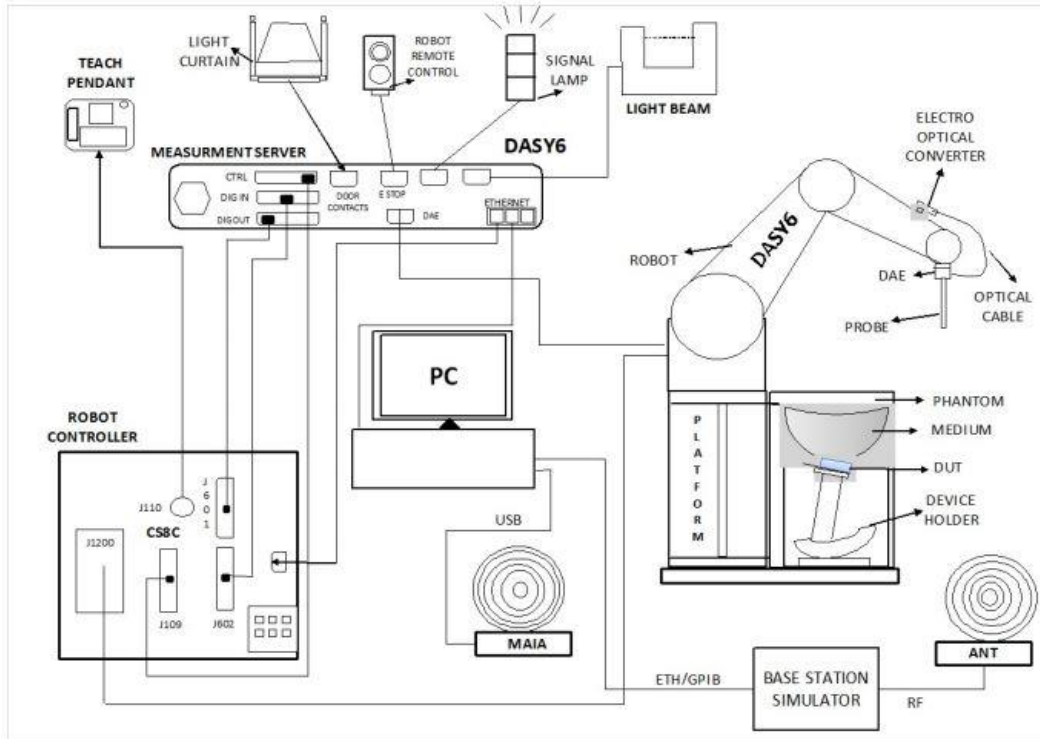

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### 6.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.


Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
	TW1190		TW3786		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY




**6.2 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
<b>Directivity</b>	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 µW/g – >100 mW/g; Linearity: ±0.2 dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	


**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
<b>Directivity</b>	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**6.3 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

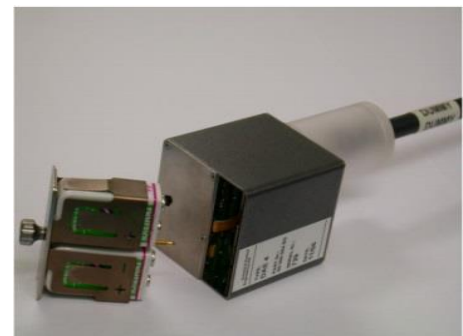

**Fig 5.1 Photo of DAE**


**6.4 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**
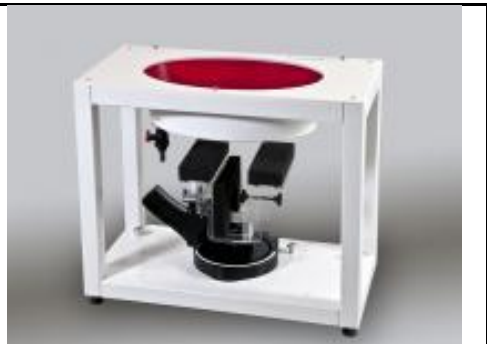
<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.5 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **7. Measurement Procedures**

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**7.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**7.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**7.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit <sup>(2)</sup>	D2450V2	929	Nov. 21, 2019	Nov. 18, 2022
SPEAG	5GHz System Validation Kit <sup>(2)</sup>	D5GHzV2	1128	Dec. 16, 2019	Dec. 13, 2022
SPEAG	Data Acquisition Electronics	DAE4	656	Jan. 19, 2022	Jan. 18, 2023
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 20, 2022	Jul. 19, 2023
SPEAG	Data Acquisition Electronics	DAE4	1696	Nov. 03, 2021	Nov. 02, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	3801	Jul. 21, 2022	Jul. 20, 2023
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Oct. 21, 2021	Oct. 20, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	7590	Mar. 28, 2022	Mar. 27, 2023
RCPTWN	Thermometer	HTC-1	TM685-1	Jun. 27, 2022	Jun. 26, 2023
RCPTWN	Thermometer	HTC-1	TM560-2	Mar. 15, 2022	Mar. 14, 2023
R&S	BT Base Station	CBT32	101136	Oct. 17, 2021	Oct. 16, 2022
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Oct. 24, 2021	Oct. 23, 2022
Keysight	ENA Network Analyzer	E5071C	MY46104758	Sep. 22, 2022	Sep. 21, 2023
SPEAG	Dielectric Probe Kit	DAK-3.5	1146	Jul. 25, 2022	Jul. 24, 2023
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Oct. 26, 2021	Oct. 25, 2022
Anritsu	Power Meter	ML2495A	1419002	Aug. 16, 2022	Aug. 15, 2023
Anritsu	Power Meter	ML2496A	2119003	Jun. 22, 2022	Jun. 21, 2023
Anritsu	Power Sensor	MA2411B	1911334	Jun. 22, 2022	Jun. 21, 2023
Anritsu	Power Sensor	MA2411B	1911333	Jun. 22, 2022	Jun. 21, 2023
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 21, 2022	Jul. 20, 2023
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 12, 2022	Jan. 11, 2023
Mini-Circuits	Power Amplifier	ZHL-42W+	715701915	May. 12, 2022	May. 11, 2023
Mini-Circuits	Power Amplifier	ZVE-3W-183+	072602118	Mar. 09, 2022	Mar. 08, 2023
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.



### 9. System Verification

#### 9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

#### <Tissue Dielectric Parameter Check Results>


Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
2450	22.5	1.750	38.300	1.80	39.20	-2.78	-2.30	±5	2022/9/23
2450	22.5	1.820	38.300	1.80	39.20	1.11	-2.30	±5	2022/9/28
5250	22.5	4.620	35.500	4.71	35.95	-1.91	-1.25	±5	2022/9/23
5250	22.5	4.680	36.400	4.71	35.95	-0.64	1.25	±5	2022/9/28
5250	22.5	4.710	36.700	4.71	35.95	0.00	2.09	±5	2022/10/14
5600	22.5	5.020	34.900	5.07	35.50	-0.99	-1.69	±5	2022/9/24
5600	22.5	5.050	35.900	5.07	35.50	-0.39	1.13	±5	2022/9/28
5750	22.5	5.200	34.500	5.22	35.35	-0.38	-2.40	±5	2022/9/24
5750	22.5	5.210	35.700	5.22	35.35	-0.19	0.99	±5	2022/9/28



**9.2 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
SAR15	2022/9/23	2450	50	D2450V2-929	EX3DV4 - SN7590	DAE4 Sn1696	2.480	53.100	49.6	-6.59	1.150	24.700	23	-6.88
SAR15	2022/9/28	2450	50	D2450V2-929	EX3DV4 - SN3931	DAE4 Sn853	2.440	53.100	48.8	-8.10	1.140	24.700	22.8	-7.69
SAR15	2022/9/23	5250	50	D5GHzV2-1128	EX3DV4 - SN7590	DAE4 Sn1696	3.680	80.000	73.6	-8.00	1.060	22.900	21.2	-7.42
SAR15	2022/9/28	5250	50	D5GHzV2-1128	EX3DV4 - SN3931	DAE4 Sn853	3.910	80.000	78.2	-2.25	1.110	22.900	22.2	-3.06
SAR16	2022/10/14	5250	50	D5GHzV2-1128	EX3DV4 - SN3801	DAE4 Sn656	3.700	80.000	74	-7.50	1.080	22.900	21.6	-5.68
SAR15	2022/9/24	5600	50	D5GHzV2-1128	EX3DV4 - SN7590	DAE4 Sn1696	3.920	82.400	78.4	-4.85	1.110	23.600	22.2	-5.93
SAR15	2022/9/28	5600	50	D5GHzV2-1128	EX3DV4 - SN3931	DAE4 Sn853	4.290	82.400	85.8	4.13	1.200	23.600	24	1.69
SAR15	2022/9/24	5750	50	D5GHzV2-1128	EX3DV4 - SN7590	DAE4 Sn1696	3.610	79.100	72.2	-8.72	1.100	22.600	22	-2.65
SAR15	2022/9/28	5750	50	D5GHzV2-1128	EX3DV4 - SN3931	DAE4 Sn853	3.830	79.100	76.6	-3.16	1.070	22.600	21.4	-5.31

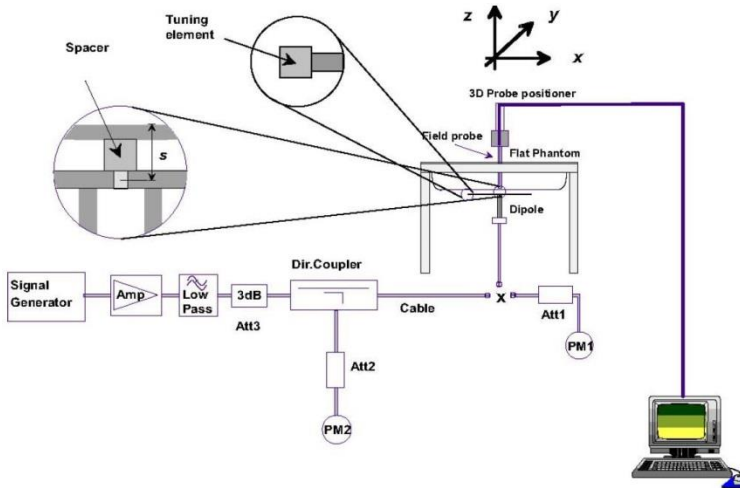

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**



## 10. WiFi/Bluetooth Output Power (Unit: dBm)

### General Note:

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6\text{W/kg}$  and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
3. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
4. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
5. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
6. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
7. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4\text{ W/kg}$ , further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4\text{ W/kg}$ , SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8\text{ W/kg}$  or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8\text{ W/kg}$ , SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2\text{ W/kg}$  or all required channels are tested.



<2.4GHz WLAN>

2.4GHz WLAN				Ant 1			Ant 2			Ant 1+2(1)		Ant 1+2(2)		Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11b 1Mbps	1	2412	16.90	17.00	100.00	16.90	17.00	100.00	17.00	17.00	16.80	17.00	19.91	20.00	100.00	
	6	2437	16.90	17.00		16.90	17.00		16.70	17.00	16.60	17.00	19.66	20.00		
	11	2462	16.80	17.00		16.90	17.00		16.70	17.00	16.90	17.00	19.81	20.00		
	12	2467	14.70	15.00		14.90	15.00		14.80	15.00	15.00	15.00	17.91	18.00		
	13	2472	10.40	10.50		10.40	10.50		10.20	10.50	10.10	10.50	13.16	13.50		
802.11g 6Mbps	1	2412	Not Require	15.00	Not Require	15.00	Not Require	Not Require	Not Require	15.00	Not Require	15.00	Not Require	18.00	Not Require	
	6	2437		17.00		17.00				17.00		20.00				
	11	2462		15.00		15.00				15.00		18.00				
	12	2467		12.00		12.00				12.00		15.00				
	13	2472		9.00		9.00				9.00		12.00				
802.11n-HT20 MCS0	1	2412	Not Require	15.00	Not Require	15.00	Not Require	Not Require	Not Require	15.00	Not Require	15.00	Not Require	18.00	Not Require	
	6	2437		17.00		17.00				17.00		20.00				
	11	2462		15.00		15.00				15.00		18.00				
	12	2467		12.00		12.00				12.00		15.00				
	13	2472		9.00		9.00				9.00		12.00				
802.11n-HT40 MCS0	3	2422	Not Require	14.00	Not Require	14.00	Not Require	Not Require	Not Require	14.00	Not Require	14.00	Not Require	17.00	Not Require	
	6	2437		16.50		16.50				16.50		19.50				
	9	2452		15.00		15.00				15.00		18.00				
	10	2457		12.00		12.00				12.00		15.00				
	11	2462		8.00		8.00				8.00		11.00				
802.11ac-VHT20 MCS0	1	2412	Not Require	15.00	Not Require	15.00	Not Require	Not Require	Not Require	15.00	Not Require	15.00	Not Require	18.00	Not Require	
	6	2437		17.00		17.00				17.00		20.00				
	11	2462		15.00		15.00				15.00		18.00				
	12	2467		12.00		12.00				12.00		15.00				
	13	2472		9.00		9.00				9.00		12.00				
802.11ac-VHT40 MCS0	3	2422	Not Require	14.00	Not Require	14.00	Not Require	Not Require	Not Require	14.00	Not Require	14.00	Not Require	17.00	Not Require	
	6	2437		16.50		16.50				16.50		19.50				
	9	2452		15.00		15.00				15.00		18.00				
	10	2457		12.00		12.00				12.00		15.00				
	11	2462		8.00		8.00				8.00		11.00				



<5GHz WLAN>

5.2GHz WLAN				Ant 1			Ant 2			Ant 1+2(1)		Ant 1+2(2)		Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	36	5180	15.80	16.00	100.00	16.00	16.00	100.00	15.60	16.00	15.70	16.00	18.66	19.00	100.00	
	40	5200	15.80	16.00		15.90	16.00		16.00	16.00	15.90	16.00	18.96	19.00		
	44	5220	15.80	16.00		16.00	16.00		16.00	16.00	15.80	16.00	18.91	19.00		
	48	5240	15.70	16.00		15.90	16.00		16.00	16.00	15.90	16.00	18.96	19.00		
802.11n-HT20 MCS0	36	5180	Not Require	16.00	Not Require	Not Require	16.00	Not Require	Not Require	16.00	Not Require	16.00	Not Require	19.00	Not Require	
	40	5200		16.00			16.00			16.00		19.00				
	44	5220		16.00			16.00			16.00		19.00				
	48	5240		16.00			16.00			16.00		19.00				
802.11n-HT40 MCS0	38	5190	Not Require	15.50	Not Require	Not Require	15.50	Not Require	Not Require	15.50	Not Require	15.50	Not Require	18.50	Not Require	
	46	5230		15.50			15.50			15.50		18.50				
802.11ac-VHT20 MCS0	36	5180	Not Require	16.00	Not Require	Not Require	16.00	Not Require	Not Require	16.00	Not Require	16.00	Not Require	19.00	Not Require	
	40	5200		16.00			16.00			16.00		19.00				
	44	5220		16.00			16.00			16.00		19.00				
	48	5240		16.00			16.00			16.00		19.00				
802.11ac-VHT40 MCS0	38	5190	Not Require	15.50	Not Require	Not Require	15.50	Not Require	Not Require	15.50	Not Require	15.50	Not Require	18.50	Not Require	
	46	5230		15.50			15.50			15.50		18.50				
802.11ac-VHT80 MCS0	42	5210	Not Require	15.50	Not Require	Not Require	15.50	Not Require	Not Require	15.50	Not Require	15.50	Not Require	18.50	Not Require	

5.3GHz WLAN				Ant 1			Ant 2			Ant 1+2(1)		Ant 1+2(2)		Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	52	5260	15.80	16.00	100.00	15.90	16.00	100.00	15.90	16.00	15.90	16.00	18.91	19.00	100.00	
	56	5280	15.90	16.00		15.70	16.00		15.80	16.00	15.70	16.00	18.76	19.00		
	60	5300	16.00	16.00		15.80	16.00		15.90	16.00	15.80	16.00	18.86	19.00		
	64	5320	16.00	16.00		15.90	16.00		16.00	16.00	15.70	16.00	18.86	19.00		
802.11n-HT20 MCS0	52	5260	Not Require	16.00	Not Require	Not Require	16.00	Not Require	Not Require	16.00	Not Require	16.00	Not Require	19.00	Not Require	
	56	5280		16.00			16.00			16.00		19.00				
	60	5300		16.00			16.00			16.00		19.00				
	64	5320		16.00			16.00			16.00		19.00				
802.11n-HT40 MCS0	54	5270	Not Require	15.50	Not Require	Not Require	15.50	Not Require	Not Require	15.50	Not Require	15.50	Not Require	18.50	Not Require	
	62	5310		15.50			15.50			15.50		18.50				
802.11ac-VHT20 MCS0	52	5260	Not Require	16.00	Not Require	Not Require	16.00	Not Require	Not Require	16.00	Not Require	16.00	Not Require	19.00	Not Require	
	56	5280		16.00			16.00			16.00		19.00				
	60	5300		16.00			16.00			16.00		19.00				
	64	5320		16.00			16.00			16.00		19.00				
802.11ac-VHT40 MCS0	54	5270	Not Require	15.50	Not Require	Not Require	15.50	Not Require	Not Require	15.50	Not Require	15.50	Not Require	18.50	Not Require	
	62	5310		15.50			15.50			15.50		18.50				
802.11ac-VHT80 MCS0	58	5290	Not Require	15.50	Not Require	Not Require	15.50	Not Require	Not Require	15.50	Not Require	15.50	Not Require	18.50	Not Require	



5.5GHz WLAN				Ant 1			Ant 2			Ant 1+2(1)		Ant 1+2(2)		Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	100	5500	15.90	16.00	100.00	15.90	16.00	100.00	15.80	16.00	15.90	16.00	18.86	19.00	100.00	
	116	5580	15.90	16.00		15.80	16.00		15.70	16.00	15.70	16.00	18.71	19.00		
	124	5620	16.00	16.00		16.00	16.00		15.60	16.00	16.00	16.00	18.81	19.00		
	132	5660	16.00	16.00		15.80	16.00		15.90	16.00	16.00	16.00	18.96	19.00		
	144	5720	15.90	16.00		15.90	16.00		15.90	16.00	16.00	16.00	18.96	19.00		
802.11n-HT20 MCS0	100	5500	Not Require	16.00	Not Require	Not Require	16.00	Not Require	Not Require	16.00	Not Require	16.00	Not Require	16.00	19.00	Not Require
	116	5580		16.00			16.00			16.00		19.00				
	124	5620		16.00			16.00			16.00		19.00				
	132	5660		16.00			16.00			16.00		19.00				
	144	5720		16.00			16.00			16.00		19.00				
802.11n-HT40 MCS0	102	5510	Not Require	15.50	Not Require	Not Require	15.50	Not Require	Not Require	15.50	Not Require	15.50	Not Require	15.50	18.50	Not Require
	110	5550		15.50			15.50			15.50		18.50				
	126	5630		15.50			15.50			15.50		18.50				
	134	5670		15.50			15.50			15.50		18.50				
	142	5710		15.50			15.50			15.50		18.50				
802.11ac-VHT20 MCS0	100	5500	Not Require	16.00	Not Require	Not Require	16.00	Not Require	Not Require	16.00	Not Require	16.00	Not Require	16.00	19.00	Not Require
	116	5580		16.00			16.00			16.00		19.00				
	124	5620		16.00			16.00			16.00		19.00				
	132	5660		16.00			16.00			16.00		19.00				
	144	5720		16.00			16.00			16.00		19.00				
802.11ac-VHT40 MCS0	102	5510	Not Require	15.50	Not Require	Not Require	15.50	Not Require	Not Require	15.50	Not Require	15.50	Not Require	15.50	18.50	Not Require
	110	5550		15.50			15.50			15.50		18.50				
	126	5630		15.50			15.50			15.50		18.50				
	134	5670		15.50			15.50			15.50		18.50				
	142	5710		15.50			15.50			15.50		18.50				
802.11ac-VHT80 MCS0	106	5530	Not Require	14.50	Not Require	Not Require	14.50	Not Require	Not Require	14.50	Not Require	14.50	Not Require	14.50	17.00	Not Require
	122	5610		15.50			15.50			15.50		18.50				
	138	5690		15.50			15.50			15.50		18.50				

5.8GHz WLAN				Ant 1			Ant 2			Ant 1+2(1)		Ant 1+2(2)		Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	149	5745	15.80	16.00	100.00	15.80	16.00	100.00	15.70	16.00	15.80	16.00	18.76	19.00	100.00	
	157	5785	15.80	16.00		16.00	16.00		15.90	16.00	15.80	16.00	18.86	19.00		
	165	5825	15.80	16.00		15.80	16.00		15.60	16.00	15.60	16.00	18.61	19.00		
802.11n-HT20 MCS0	149	5745	Not Require	16.00	Not Require	Not Require	16.00	Not Require	Not Require	16.00	Not Require	16.00	Not Require	16.00	19.00	Not Require
	157	5785		16.00			16.00			16.00		19.00				
	165	5825		16.00			16.00			16.00		19.00				
802.11n-HT40 MCS0	151	5755	Not Require	15.50	Not Require	Not Require	15.50	Not Require	Not Require	15.50	Not Require	15.50	Not Require	15.50	18.50	Not Require
	159	5795		15.50			15.50			15.50		18.50				
802.11ac-VHT20 MCS0	149	5745	Not Require	16.00	Not Require	Not Require	16.00	Not Require	Not Require	16.00	Not Require	16.00	Not Require	16.00	19.00	Not Require
	157	5785		16.00			16.00			16.00		19.00				
	165	5825		16.00			16.00			16.00		19.00				
802.11ac-VHT40 MCS0	151	5755	Not Require	15.50	Not Require	Not Require	15.50	Not Require	Not Require	15.50	Not Require	15.50	Not Require	15.50	18.50	Not Require
	159	5795		15.50			15.50			15.50		18.50				
802.11ac-VHT80 MCS0	155	5775	Not Require	15.50	Not Require	Not Require	15.50	Not Require	Not Require	15.50	Not Require	15.50	Not Require	15.50	18.50	Not Require




<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	3.30	3.20	3.20
	CH 39	2441	3.10	3.00	3.00
	CH 78	2480	3.20	3.10	3.10
Tune-up Limit			5.00	5.00	5.00


Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	4.30	4.70
	CH 19	2440	4.00	4.60
	CH 39	2480	4.10	4.20
Tune-up Limit			5.00	5.00

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 77.43% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

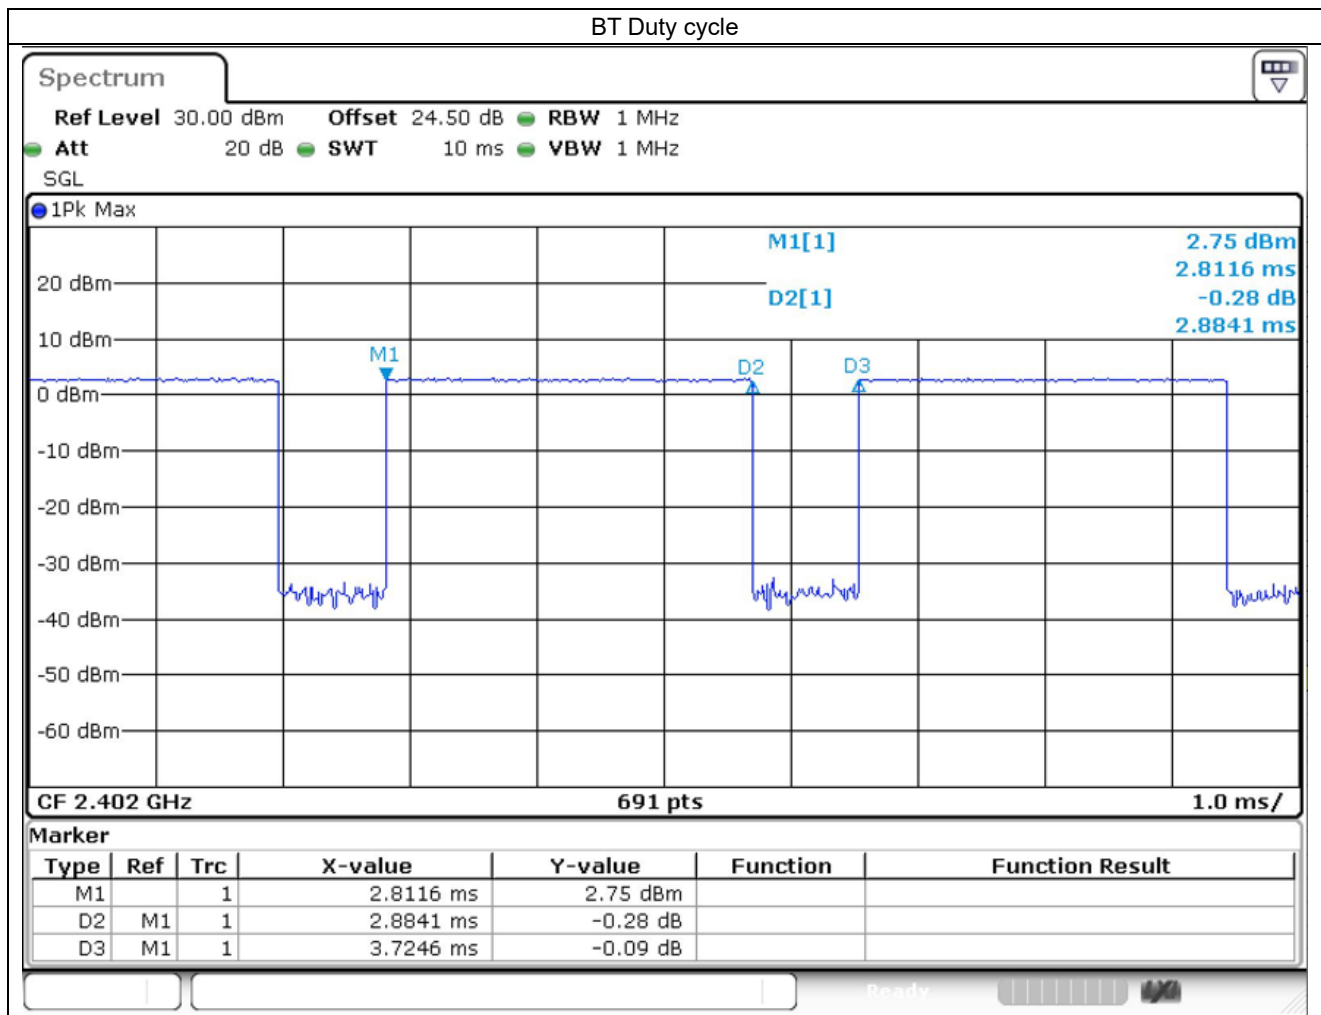

### 11. Antenna Location

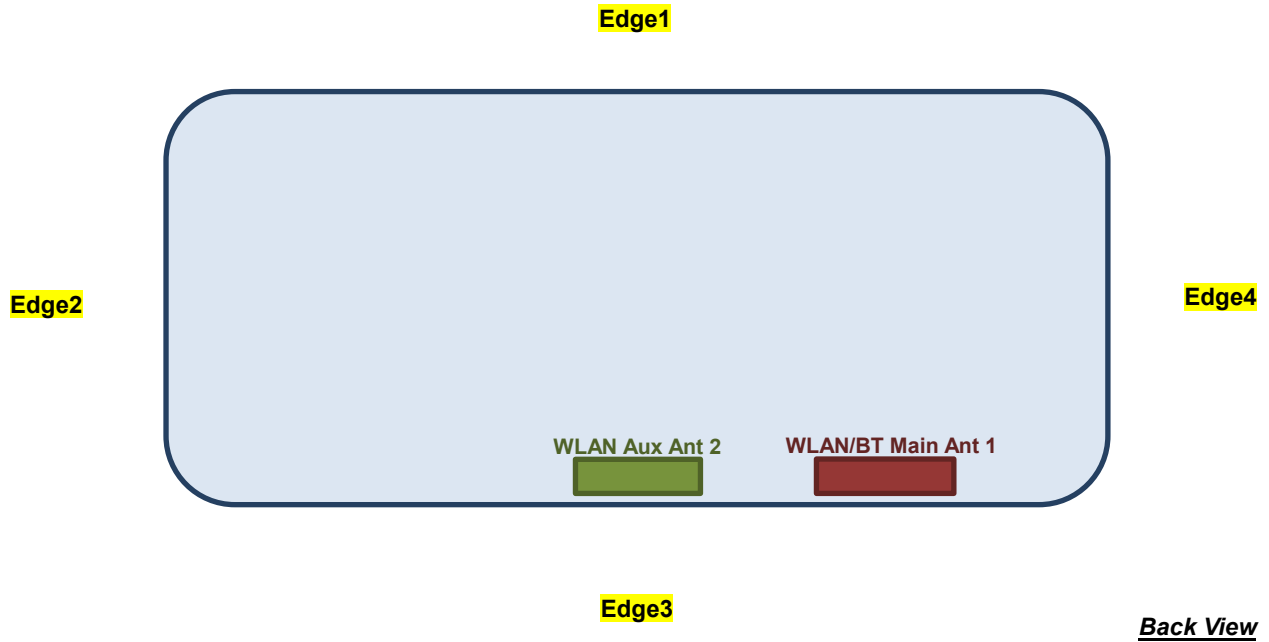

The separation distance for antenna to edge :

Antenna	To Edge1 (mm)	To Edge2 (mm)	To Edge3 (mm)	To Edge4 (mm)
WLAN/BT Main Antenna 1	110	194	< 5	60
WLAN Aux Antenna 2	110	124	< 5	130



**<SAR test exclusion table>**

**General Note:**

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
  - $[(max. \text{ power of channel, including tune-up tolerance, mW}) / (min. \text{ test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
    - f(GHz) is the RF channel transmit frequency in GHz
    - Power and distance are rounded to the nearest mW and mm before calculation
    - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
  - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · ( f(MHz)/150)] mW, at 100 MHz to 1500 MHz
  - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

	Wireless Interface	2.4GHz WLAN/BT ANT 1	2.4GHz WLAN ANT 2	5GHz WLAN ANT 1	5GHz WLAN ANT 2
Exposure Position	Calculated Frequency (MHz)	2472	2472	5825	5825
	Maximum power (dBm)	17.0	17.0	16.0	16.0
	Maximum rated power(mW)	50.12	50.12	39.81	39.81
	Separation distance(mm)	5.0	5.0	5.0	5.0
Bottom Face	exclusion threshold	15.8	15.8	19.2	19.2
	Testing required?	Yes	Yes	Yes	Yes
	Separation distance(mm)	110.0	110.0	110.0	110.0
Edge 1	exclusion threshold	695.0	695.0	662.0	662.0
	Testing required?	No	No	No	No
	Separation distance(mm)	194.0	124.0	194.0	124.0
Edge 2	exclusion threshold	1535.0	835.0	1502.0	802.0
	Testing required?	No	No	No	No
	Separation distance(mm)	5.0	5.0	5.0	5.0
Edge 3	exclusion threshold	15.8	15.8	19.2	19.2
	Testing required?	Yes	Yes	Yes	Yes
	Separation distance(mm)	60.0	130.0	60.0	130.0
Edge 4	exclusion threshold	195.0	895.0	162.0	862.0
	Testing required?	No	No	No	No



## 12. SAR Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. Additional extremity SAR for front face by FCC requirement.

### WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for WLAN5.2GHz band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6$ W/kg and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
7. For determination of the scaling factor for report SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain
8. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



12.1 Body SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	HTK	Ant 1	1	2412	16.90	17.00	1.023	100	1.000	0.03	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	HTK	Ant 1	1	2412	16.90	17.00	1.023	100	1.000	0	0.649	0.664
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	HTK	Ant 1	6	2437	16.90	17.00	1.023	100	1.000	-0.01	0.596	0.610
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	HTK	Ant 1	11	2462	16.80	17.00	1.047	100	1.000	0.04	0.464	0.486
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	INPAQ	Ant 1	1	2412	16.90	17.00	1.023	100	1.000	-0.09	0.300	0.307
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	AWAN	Ant 1	1	2412	16.90	17.00	1.023	100	1.000	0.01	0.194	0.199
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	HTK	Ant 2	1	2412	16.90	17.00	1.023	100	1.000	-0.06	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	HTK	Ant 2	1	2412	16.90	17.00	1.023	100	1.000	0.07	0.282	0.289
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	HTK	Ant 2	6	2437	16.90	17.00	1.023	100	1.000	-0.1	0.332	0.340
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	HTK	Ant 2	11	2462	16.90	17.00	1.023	100	1.000	0.02	0.441	0.451
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	INPAQ	Ant 2	11	2462	16.90	17.00	1.023	100	1.000	0.02	0.346	0.354
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	AWAN	Ant 2	11	2462	16.90	17.00	1.023	100	1.000	0.1	0.426	0.436
01	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	HTK	Ant 1+2(1)	1	2412	17.00	17.00	1.000	100	1.000	0.08	0.605	0.605
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	HTK	Ant 1+2(2)	1	2412	16.80	17.00	1.047	100	1.000	0.08	0.667	0.698

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	HTK	Ant 1	64	5320	16.00	16.00	1.000	100	1.000	-0.01	0.038	0.038
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	64	5320	16.00	16.00	1.000	100	1.000	0.02	0.572	0.572
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	52	5260	15.80	16.00	1.047	100	1.000	0.09	0.388	0.406
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	56	5280	15.90	16.00	1.023	100	1.000	0.06	0.529	0.541
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	60	5300	16.00	16.00	1.000	100	1.000	0.04	0.421	0.421
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	INPAQ	Ant 1	56	5280	15.90	16.00	1.023	100	1.000	0.01	0.372	0.381
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 1	56	5280	15.90	16.00	1.023	100	1.000	-0.04	0.849	0.869
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 1	52	5260	15.80	16.00	1.047	100	1.000	0.04	0.742	0.777
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 1	60	5300	16.00	16.00	1.000	100	1.000	0.04	0.945	0.945
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 1	64	5320	16.00	16.00	1.000	100	1.000	-0.05	0.978	0.978
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	HTK	Ant 2	52	5260	15.90	16.00	1.023	100	1.000	0.03	0.060	0.061
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 2	52	5260	15.90	16.00	1.023	100	1.000	0.01	0.715	0.732
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 2	56	5280	15.70	16.00	1.072	100	1.000	0.08	0.725	0.777
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 2	60	5300	15.80	16.00	1.047	100	1.000	-0.01	0.650	0.681
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 2	64	5320	15.90	16.00	1.023	100	1.000	0.05	0.581	0.595
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	INPAQ	Ant 2	56	5280	15.70	16.00	1.072	100	1.000	-0.07	0.721	0.773
02	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 2	56	5280	15.70	16.00	1.072	100	1.000	0	0.985	1.055
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 2	52	5260	15.90	16.00	1.023	100	1.000	0.09	0.947	0.969
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 2	60	5300	15.80	16.00	1.047	100	1.000	-0.1	0.941	0.985
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 2	64	5320	15.90	16.00	1.023	100	1.000	0	0.981	1.004
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 1+2(1)	56	5280	15.80	16.00	1.047	100	1.000	-0.05	0.931	0.975
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 1+2(2)	56	5280	15.70	16.00	1.072	100	1.000	-0.05	0.911	0.976
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 1+2(1)	56	5280	14.90	15.00	1.023	100	1.000	-0.08	0.749	0.766
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 1+2(2)	56	5280	15.00	15.00	1.000	100	1.000	-0.08	0.733	0.733
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	HTK	Ant 1	124	5620	16.00	16.00	1.000	100	1.000	-0.05	0.076	0.076
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	124	5620	16.00	16.00	1.000	100	1.000	0.11	0.425	0.425
03	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	100	5500	15.90	16.00	1.023	100	1.000	-0.03	0.996	1.019
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	116	5580	15.90	16.00	1.023	100	1.000	0.12	0.584	0.598
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	132	5660	16.00	16.00	1.000	100	1.000	0.15	0.364	0.364
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	144	5720	15.90	16.00	1.023	100	1.000	-0.09	0.306	0.313
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	INPAQ	Ant 1	100	5500	15.90	16.00	1.023	100	1.000	0.1	0.688	0.704
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 1	100	5500	15.90	16.00	1.023	100	1.000	-0.19	0.396	0.405
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	HTK	Ant 2	124	5620	16.00	16.00	1.000	100	1.000	-0.11	0.062	0.062
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 2	124	5620	16.00	16.00	1.000	100	1.000	0	0.238	0.238
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 2	100	5500	15.90	16.00	1.023	100	1.000	-0.05	0.207	0.212
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 2	116	5580	15.80	16.00	1.047	100	1.000	-0.01	0.240	0.251
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 2	132	5660	15.80	16.00	1.047	100	1.000	0.1	0.278	0.291
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 2	144	5720	15.90	16.00	1.023	100	1.000	-0.13	0.330	0.338
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	INPAQ	Ant 2	144	5720	15.90	16.00	1.023	100	1.000	-0.06	0.591	0.605
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 2	144	5720	15.90	16.00	1.023	100	1.000	-0.18	0.552	0.565
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1+2(1)	100	5500	15.80	16.00	1.047	100	1.000	0.02	0.763	0.799
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1+2(2)	100	5500	15.90	16.00	1.023	100	1.000	0.02	0.568	0.581
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	HTK	Ant 1	149	5745	15.80	16.00	1.047	100	1.000	-0.09	0.070	0.073
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	149	5745	15.80	16.00	1.047	100	1.000	0.11	0.261	0.273
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	157	5785	15.80	16.00	1.047	100	1.000	-0.11	0.258	0.270
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	165	5825	15.80	16.00	1.047	100	1.000	-0.12	0.277	0.290
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	INPAQ	Ant 1	165	5825	15.80	16.00	1.047	100	1.000	-0.12	0.384	0.402
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 1	165	5825	15.80	16.00	1.047	100	1.000	-0.07	0.667	0.698
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	HTK	Ant 2	157	5785	16.00	16.00	1.000	100	1.000	-0.12	0.091	0.091
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 2	157	5785	16.00	16.00	1.000	100	1.000	-0.07	0.613	0.613
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 2	149	5745	15.80	16.00	1.047	100	1.000	-0.01	0.486	0.509
04	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 2	165	5825	15.80	16.00	1.047	100	1.000	-0.09	0.743	0.778
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	INPAQ	Ant 2	165	5825	15.80	16.00	1.047	100	1.000	0.05	0.688	0.720
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 2	165	5825	15.80	16.00	1.047	100	1.000	0.05	0.673	0.705
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1+2(1)	165	5825	15.60	16.00	1.096	100	1.000	0.02	0.330	0.362
	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1+2(2)	165	5825	15.60	16.00	1.096	100	1.000	0.02	0.547	0.600



**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Bottom Face	0mm	HTK	Ant 1	0	2402	3.30	5.00	1.479	77.43	1.076	0.03	0.001	0.002
05	Bluetooth	1Mbps	Edge 3	0mm	HTK	Ant 1	0	2402	3.30	5.00	1.479	77.43	1.076	0.02	0.005	0.008
	Bluetooth	1Mbps	Edge 3	0mm	HTK	Ant 1	39	2441	3.10	5.00	1.549	77.43	1.076	-0.01	0.003	0.005
	Bluetooth	1Mbps	Edge 3	0mm	HTK	Ant 1	78	2480	3.20	5.00	1.514	77.43	1.076	0.01	0.004	0.007
	Bluetooth	1Mbps	Edge 3	0mm	INPAQ	Ant 1	0	2402	3.30	5.00	1.479	77.43	1.076	0.03	0.004	0.006
	Bluetooth	1Mbps	Edge 3	0mm	AWAN	Ant 1	0	2402	3.30	5.00	1.479	77.43	1.076	0.02	0.002	0.003

**12.2 Extremity SAR**

**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front Face	0mm	HTK	Ant 1	1	2412	16.90	17.00	1.023	100	1.000	0	0.343	0.351
	WLAN2.4GHz	802.11b 1Mbps	Front Face	0mm	HTK	Ant 1	6	2437	16.90	17.00	1.023	100	1.000	0.01	0.301	0.308
	WLAN2.4GHz	802.11b 1Mbps	Front Face	0mm	HTK	Ant 1	11	2462	16.80	17.00	1.047	100	1.000	-0.05	0.257	0.269
	WLAN2.4GHz	802.11b 1Mbps	Front Face	0mm	INPAQ	Ant 1	1	2412	16.90	17.00	1.023	100	1.000	0.03	0.156	0.160
	WLAN2.4GHz	802.11b 1Mbps	Front Face	0mm	AWAN	Ant 1	1	2412	16.90	17.00	1.023	100	1.000	0.12	0.055	0.056
	WLAN2.4GHz	802.11b 1Mbps	Front Face	0mm	HTK	Ant 2	1	2412	16.90	17.00	1.023	100	1.000	0.01	0.180	0.184
	WLAN2.4GHz	802.11b 1Mbps	Front Face	0mm	HTK	Ant 2	6	2437	16.90	17.00	1.023	100	1.000	0.03	0.221	0.226
	WLAN2.4GHz	802.11b 1Mbps	Front Face	0mm	HTK	Ant 2	11	2462	16.90	17.00	1.023	100	1.000	-0.03	0.294	0.301
	WLAN2.4GHz	802.11b 1Mbps	Front Face	0mm	INPAQ	Ant 2	11	2462	16.90	17.00	1.023	100	1.000	-0.05	0.200	0.205
06	WLAN2.4GHz	802.11b 1Mbps	Front Face	0mm	AWAN	Ant 2	11	2462	16.90	17.00	1.023	100	1.000	0.08	0.384	0.393

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 1	64	5320	16.00	16.00	1.000	100	1.000	-0.02	0.244	0.244
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 1	52	5260	15.80	16.00	1.047	100	1.000	-0.06	0.136	0.142
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 1	56	5280	15.90	16.00	1.023	100	1.000	0.01	0.123	0.126
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 1	60	5300	16.00	16.00	1.000	100	1.000	0.04	0.187	0.187
07	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	INPAQ	Ant 1	64	5320	16.00	16.00	1.000	100	1.000	0.01	0.941	0.941
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	AWAN	Ant 1	64	5320	16.00	16.00	1.000	100	1.000	0.03	0.352	0.352
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 2	52	5260	15.90	16.00	1.023	100	1.000	-0.04	0.282	0.289
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 2	56	5280	15.70	16.00	1.072	100	1.000	0.03	0.121	0.130
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 2	60	5300	15.80	16.00	1.047	100	1.000	-0.1	0.253	0.265
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 2	64	5320	15.90	16.00	1.023	100	1.000	0.09	0.205	0.210
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	INPAQ	Ant 2	52	5260	15.90	16.00	1.023	100	1.000	0.04	0.271	0.277
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	AWAN	Ant 2	52	5260	15.90	16.00	1.023	100	1.000	0	0.481	0.492
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 1	124	5620	16.00	16.00	1.000	100	1.000	0.16	0.172	0.172
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 1	100	5500	15.90	16.00	1.023	100	1.000	0.06	0.382	0.391
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 1	116	5580	15.90	16.00	1.023	100	1.000	-0.06	0.248	0.254
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 1	132	5660	16.00	16.00	1.000	100	1.000	-0.08	0.130	0.130
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 1	144	5720	15.90	16.00	1.023	100	1.000	0.14	0.104	0.106
08	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	INPAQ	Ant 1	100	5500	15.90	16.00	1.023	100	1.000	-0.04	0.958	0.980
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	AWAN	Ant 1	100	5500	15.90	16.00	1.023	100	1.000	-0.03	0.154	0.158
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 2	124	5620	16.00	16.00	1.000	100	1.000	0.08	0.151	0.151
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 2	100	5500	15.90	16.00	1.023	100	1.000	-0.13	0.137	0.140
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 2	116	5580	15.80	16.00	1.047	100	1.000	0.17	0.125	0.131
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 2	132	5660	15.80	16.00	1.047	100	1.000	0.11	0.142	0.149
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 2	144	5720	15.90	16.00	1.023	100	1.000	-0.05	0.163	0.167
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	INPAQ	Ant 2	144	5720	15.90	16.00	1.023	100	1.000	-0.13	0.338	0.346
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	AWAN	Ant 2	144	5720	15.90	16.00	1.023	100	1.000	0.15	0.142	0.145
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 1	149	5745	15.80	16.00	1.047	100	1.000	-0.01	0.118	0.124
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 1	157	5785	15.80	16.00	1.047	100	1.000	-0.13	0.098	0.103
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 1	165	5825	15.80	16.00	1.047	100	1.000	-0.06	0.119	0.125
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	INPAQ	Ant 1	165	5825	15.80	16.00	1.047	100	1.000	-0.04	0.403	0.422
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	AWAN	Ant 1	165	5825	15.80	16.00	1.047	100	1.000	-0.14	0.205	0.215
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 2	157	5785	16.00	16.00	1.000	100	1.000	-0.16	0.195	0.195
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 2	149	5745	15.80	16.00	1.047	100	1.000	0.08	0.196	0.205
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	HTK	Ant 2	165	5825	15.80	16.00	1.047	100	1.000	0.04	0.295	0.309
09	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	INPAQ	Ant 2	165	5825	15.80	16.00	1.047	100	1.000	-0.05	0.527	0.552
	WLAN5GHz	802.11a 6Mbps	Front Face	0mm	AWAN	Ant 2	165	5825	15.80	16.00	1.047	100	1.000	-0.17	0.467	0.489

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
10	Bluetooth	1Mbps	Front Face	0mm	HTK	Ant 1	0	2402	3.30	5.00	1.479	77.43	1.076	-0.01	0.003	0.005
	Bluetooth	1Mbps	Front Face	0mm	HTK	Ant 1	39	2441	3.10	5.00	1.549	77.43	1.076	0.03	0.002	0.003
	Bluetooth	1Mbps	Front Face	0mm	HTK	Ant 1	78	2480	3.20	5.00	1.514	77.43	1.076	-0.02	0.001	0.002
	Bluetooth	1Mbps	Front Face	0mm	INPAQ	Ant 1	0	2402	3.30	5.00	1.479	77.43	1.076	0.03	0.002	0.003
	Bluetooth	1Mbps	Front Face	0mm	AWAN	Ant 1	0	2402	3.30	5.00	1.479	77.43	1.076	0.04	0.002	0.003

**12.3 Repeated SAR Measurement**

No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 2	56	5280	15.70	16.00	1.072	100	1.000	0	0.985	-	1.055
2nd	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	AWAN	Ant 2	56	5280	15.70	16.00	1.072	100	1.000	0.04	0.972	1.01	1.042
1st	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	100	5500	15.90	16.00	1.023	100	1.000	-0.03	0.996	-	1.019
2nd	WLAN5GHz	802.11a 6Mbps	Edge 3	0mm	HTK	Ant 1	100	5500	15.90	16.00	1.023	100	1.000	0.06	0.985	1.01	1.008

**General Note:**

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8W/kg$ .
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45W/kg$ , only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

**13. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Body	Extremity
1.	2.4GHz WLAN Ant 1 + 2.4GHz WLAN Ant 2	Yes	Yes
2.	5GHz WLAN Ant 1 + 5GHz WLAN Ant 2	Yes	Yes
3.	2.4GHz WLAN Ant 2 + Bluetooth Ant 1	Yes	Yes
4.	5GHz WLAN Ant 2 + Bluetooth Ant 1	Yes	Yes

**General Note:**

1. The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
2. The Scaled SAR summation is calculated based on the same configuration and test position.
3. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation  $< 1.6W/kg$ .
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where  $(x1, y1, z1)$  and  $(x2, y2, z2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR  $< 1.6W/kg$ .



**13.1 Body Exposure Conditions**

**Step 1**

Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	3+4 Summed 1g SAR (W/kg)	2+5 Summed 1g SAR (W/kg)	4+5 Summed 1g SAR (W/kg)
	WLAN2.4GHz Ant 1 1g SAR (W/kg)	WLAN2.4GHz Ant 2 1g SAR (W/kg)	WLAN5GHz Ant 1 1g SAR (W/kg)	WLAN5GHz Ant 2 1g SAR (W/kg)	Bluetooth Ant 1 1g SAR (W/kg)				
Bottom Face at 0mm	0.001	0.001	0.076	0.091	0.002	<b>0.002</b>	<b>0.167</b>	<b>0.003</b>	<b>0.093</b>
Edge 3 at 0mm	0.664	0.451	1.019	1.055	0.008	<b>1.115</b>	<b>2.074</b>	<b>0.459</b>	<b>1.063</b>

**Step 2**

Exposure Position	1	2
	WLAN2.4GHz Ant 1+2 1g SAR (W/kg)	WLAN5GHz Ant 1+2 1g SAR (W/kg)
	Edge 3 at 0mm	0.698

**13.2 Extremity Exposure Conditions**

Exposure Position	1	2	3	4	5	1+2 Summed 10g SAR (W/kg)	3+4 Summed 10g SAR (W/kg)	2+5 Summed 10g SAR (W/kg)	4+5 Summed 10g SAR (W/kg)
	WLAN2.4GHz Ant 1 10g SAR (W/kg)	WLAN2.4GHz Ant 2 10g SAR (W/kg)	WLAN5GHz Ant 1 10g SAR (W/kg)	WLAN5GHz Ant 2 10g SAR (W/kg)	Bluetooth Ant 1 10g SAR (W/kg)				
Front Face at 0mm	0.351	0.393	0.980	0.552	0.005	<b>0.744</b>	<b>1.532</b>	<b>0.398</b>	<b>0.557</b>

**Test Engineer :** Randy Lin, Henry Chou and Kevin Guo



## **14. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg and the measured 10-g SAR within a frequency band is  $< 3.75$  W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

### Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## **15. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [8] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.