

# Regulatory WLAN Antenna Information (Template)

*English Language Required for Intel Regulatory Review / Approval*

**(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.**

**Remove Intel references and make this your own document)**

Platform information										
Brand	ODM	****End product model name	Intel platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)					
Valve	Quanta	1010			2.23					
****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor	Type		Antenna Part number (Main)				Antenna Part number (Aux)			
AWAN	PIFA		AEP6Y-100014 (DQ610001400)				AEP6Y-100015 (DQ610001500)			
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	1.19	0.69	0.54	1.45	0.10					
Aux	2.66	1.71	1.53	2.74	2.47					
Intel Reference Gain/Type/ Separation distance										
Antenna Type	Antenna Peak gain (In dBi)*									Distance to the end user (mm)
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	Generic: refer to modular FCC SAR report
Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	Mid-power: ≥ 8 mm
PIFA	3.24	3.64	3.73	4.77	4.97	4.83	4.30	5.37	5.59	Low power: ≥ 5 mm
Dipole	2.89	2.92	3.19	4.41	4.22	4.83	4.30	4.49	5.34	
Notes (marked with *)										
* SAR minimum separation (mm)										
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)										
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)										
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)										
* 3D Peak Antenna gain should be equal or greater than -2 dBi										
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.										

# Table of contents


1. Applicable test method
2. Test & System Description
  - a. Test setup
  - b. Equipment list
3. Setup photo

1. **Applicable test methods**

This test report is prepared for host antenna testing under a Full Anechoic Chamber.

2. **Test & System Description**

a. Test setup

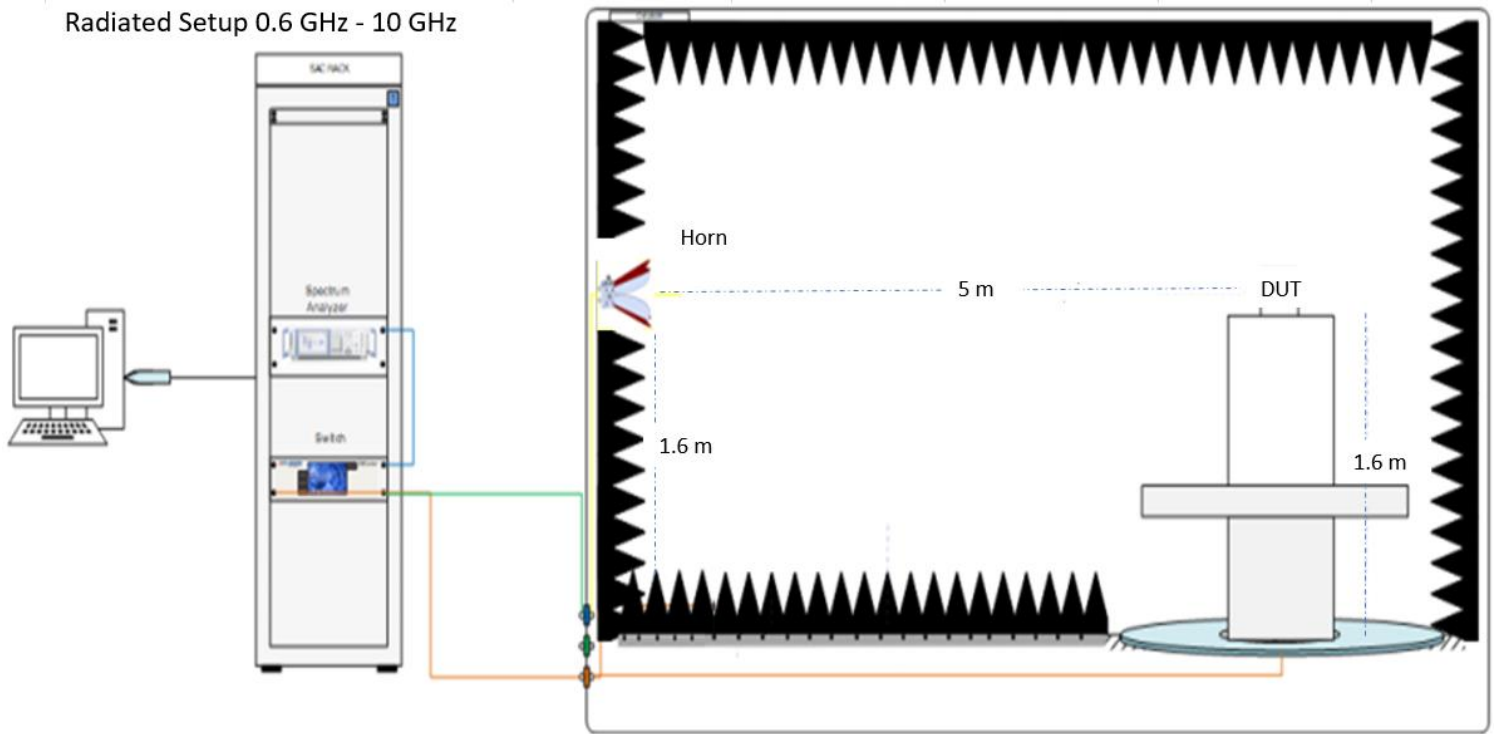

## b. Equipment list

Device	Type/Module	Serial#	Manufacturer	Cal. Date	Cal. Due Date
Anechoic Chamber	AMS-8500	1047	ETS-Lindgren	2022/1/21	2023/7/22
Turn Table	ETS	-	ETS-Lindgren	N/A	N/A
Rotate controller	2090	SN 00035073	ETS-Lindgren	N/A	N/A
Horn Antenna	HAD-0710	111025-02	Bwant	2021/5/16	2023/5/16
Vector Network Analyzer	E5071C	MY46733781	Keysight	2022/1/21	2023/1/21
Cable 40cm 18 GHz	201EH012010400	201EH012010400#1	Jmtt	2022/3/27	2023/3/27
Cable 6m 18 GHz	201EH012016000	201EH012016000#3	Jmtt	2022/3/27	2023/3/27
Cable 6m 18 GHz	201EH012016000	201EH012016000#5	Jmtt	2022/3/27	2023/3/27
Cable 3.5m 18 GHz	201EH012013500	201EH012013500#3	Jmtt	2022/3/27	2023/3/27
Cable 1.5m 18 GHz	201EH012011500	201EH012011500#2	Jmtt	2022/3/27	2023/3/27

# Antenna Information

## Section 1. Antenna Assembly Specifications

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
AEP6Y-100014 (DQ610001400) Main Antenna	AWAN	PIFA	1)Shen-Yu/KAIBO 2)50ohm coaxial cable 3)length: 88 mm 4)Connector P/N: I-pex: 20565-001R-13	2400-2483.5	1.19 dBi(peak)	1.40 dBi(peak)	2 max	0.21 dBi(peak)
				5150-5250	0.69 dBi(peak)	1.02 dBi(peak)	2 max	0.33 dBi(peak)
				5250-5350	0.54 dBi(peak)	0.88 dBi(peak)	2 max	0.34 dBi(peak)
				5470-5725	1.45 dBi(peak)	1.80 dBi(peak)	2 max	0.35 dBi(peak)
				5725-5850	0.10 dBi(peak)	0.46 dBi(peak)	2 max	0.36 dBi(peak)
				5925-6425				
				6425-6525				
				6875-7125				
AEP6Y-100015 (DQ610001500) Aux Antenna	AWAN	PIFA	1)Shen-Yu/KAIBO 2)50ohm coaxial cable 3)length: 20 mm 4)Connector P/N: I-pex: 20565-001R-13	2400-2483.5	2.66 dBi(peak)	2.70 dBi(peak)	2 max	0.04 dBi(peak)
				5150-5250	1.71 dBi(peak)	1.78 dBi(peak)	2 max	0.07 dBi(peak)
				5250-5350	1.53 dBi(peak)	1.60 dBi(peak)	2 max	0.07 dBi(peak)
				5470-5725	2.74 dBi(peak)	2.82 dBi(peak)	2 max	0.08 dBi(peak)
				5725-5850	2.47 dBi(peak)	2.55 dBi(peak)	2 max	0.08 dBi(peak)
				5925-6425				
				6425-6525				
				6875-7125				


- 3D Antenna Peak Gain required being test in system basis.

## Section 3. Radiation characteristics of antenna loaded in Host Platform

### Main Antenna


#### Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.19

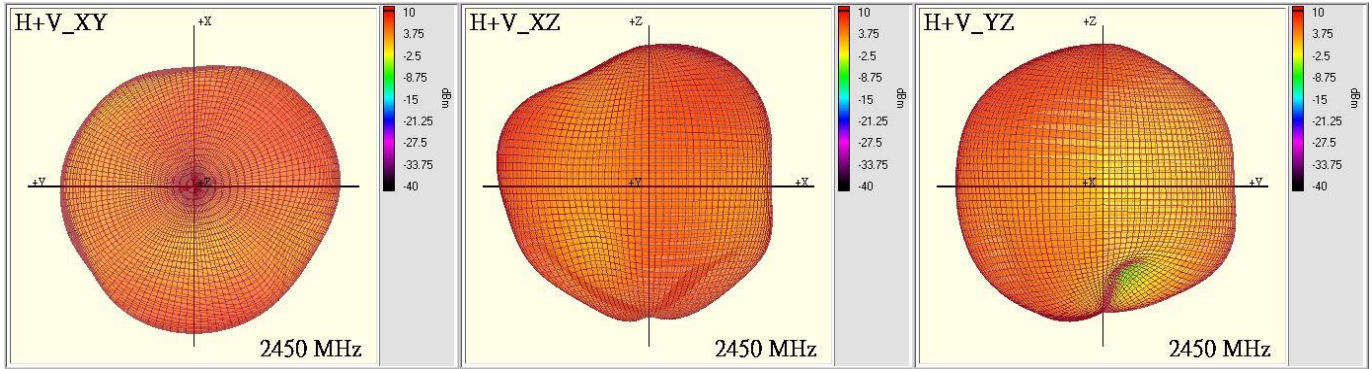


#### Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	0.69

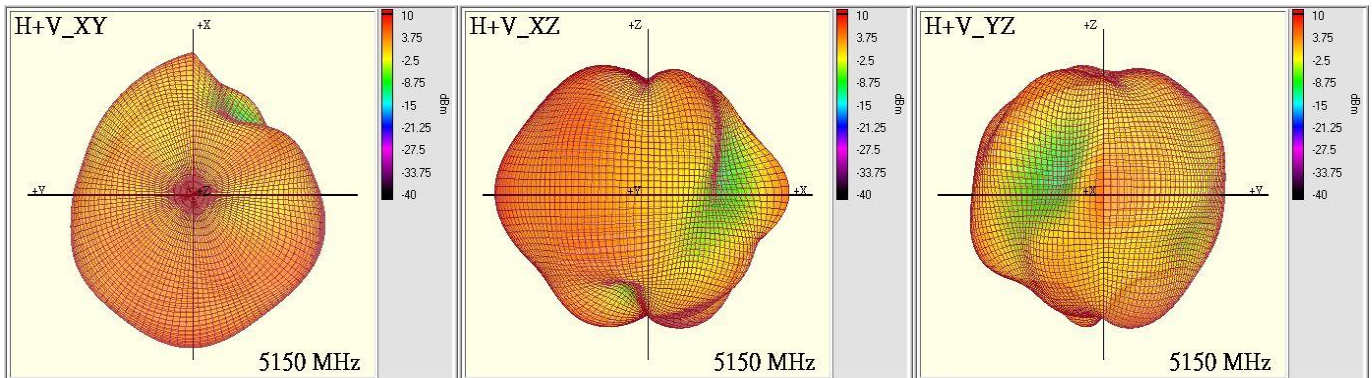


### Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	0.54

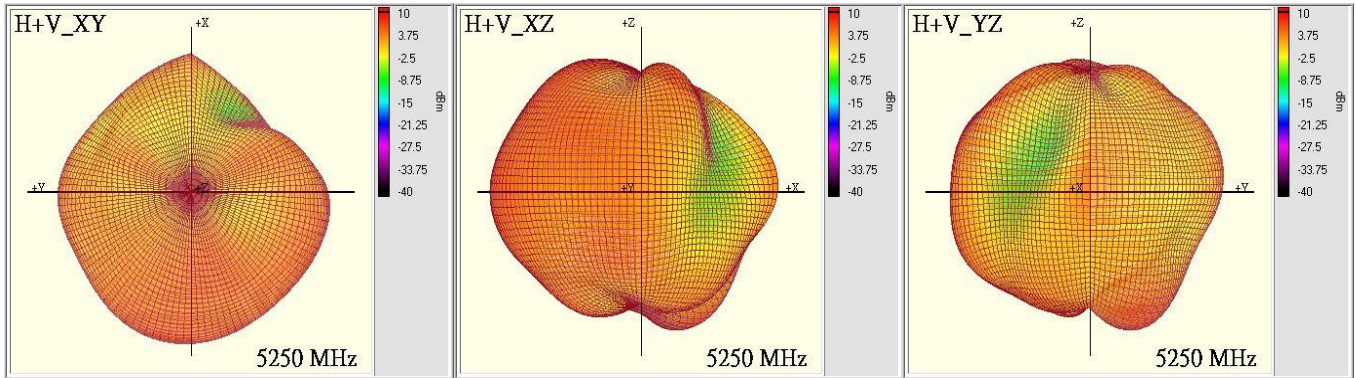


### Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.45

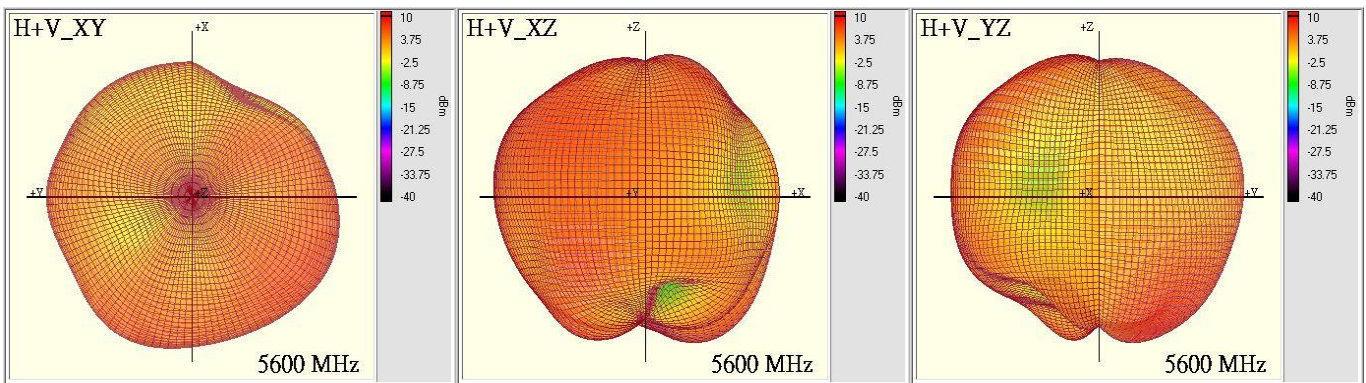

### Max Antenna 3D Radiation Pattern 5725-5850 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	0.10

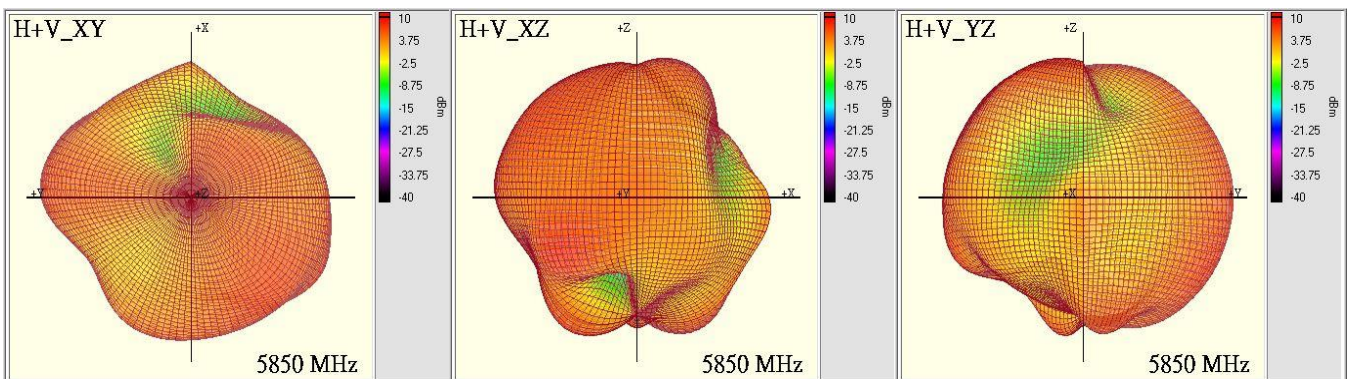

## Auxiliary Antenna


### Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.66

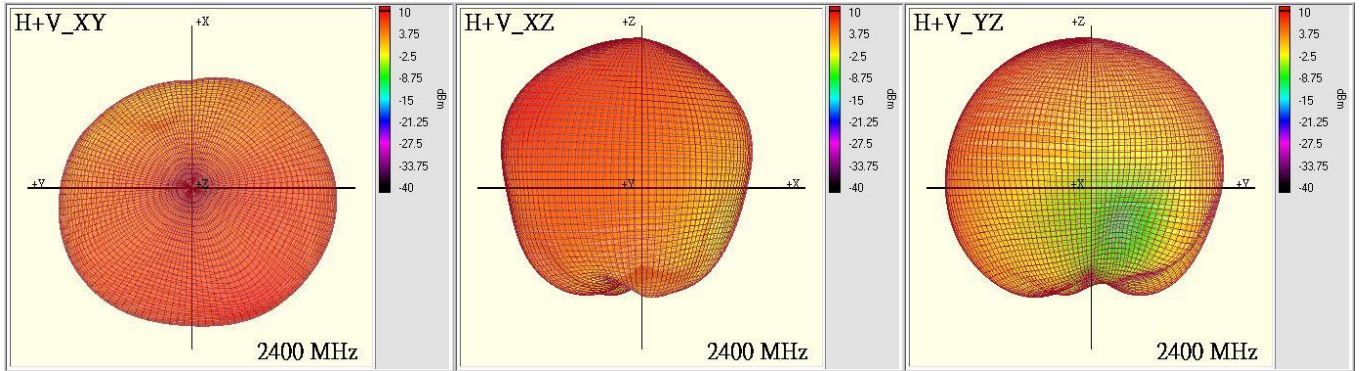

### Max Antenna 3D Radiation Pattern 5150-5250 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.71

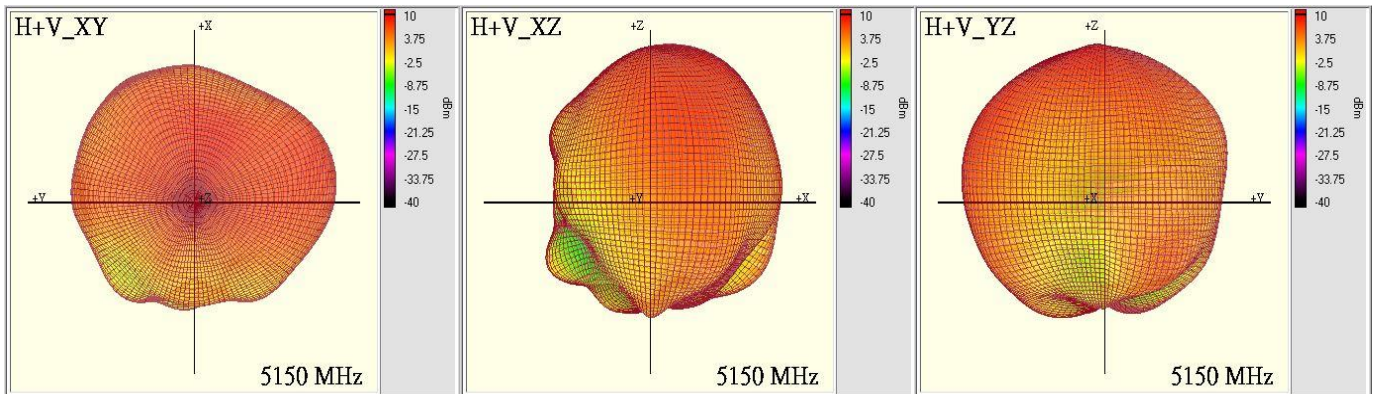




### Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.53

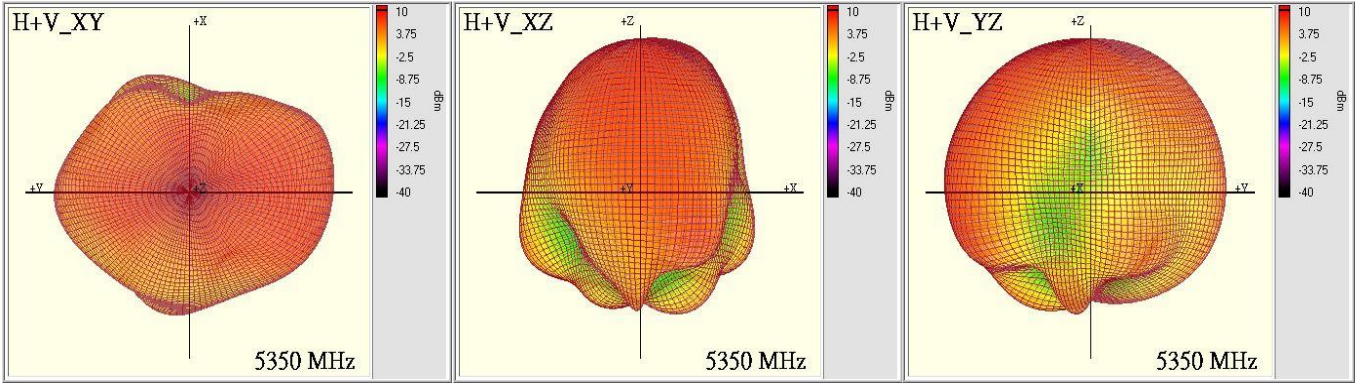

### Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.74

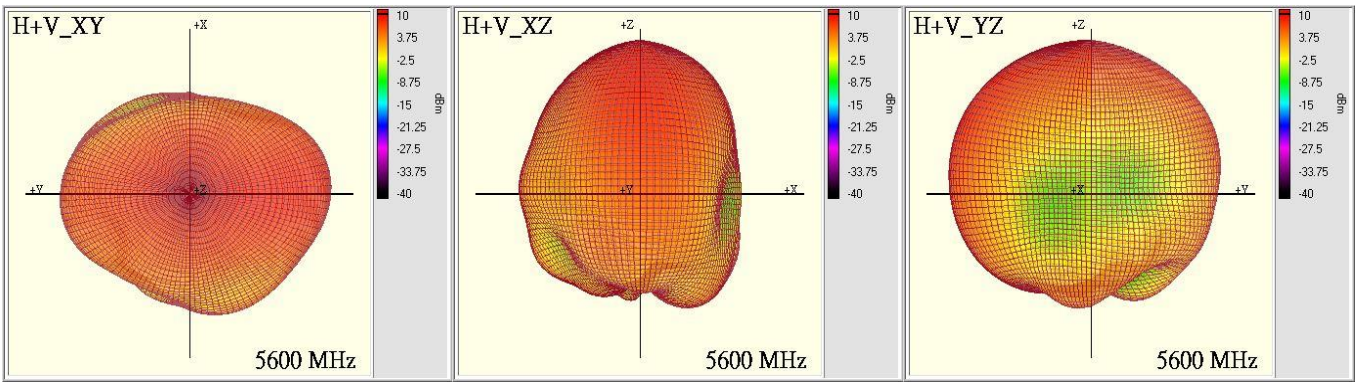

### Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.47

