


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	98.8 PK			1.58 V	360	102.2	-3.4
2	*2467.00	97.1 AV			1.58 V	360	100.5	-3.4
3	2483.50	56.3 PK	74.0	-17.7	1.58 V	360	59.7	-3.4
4	2483.50	47.4 AV	54.0	-6.6	1.58 V	360	50.8	-3.4
5	4934.00	39.8 PK	74.0	-34.2	3.24 V	271	38.6	1.2
6	4934.00	33.4 AV	54.0	-20.6	3.24 V	271	32.2	1.2
7	7401.00	47.9 PK	74.0	-26.1	3.60 V	298	40.9	7.0
8	7401.00	39.7 AV	54.0	-14.3	3.60 V	298	32.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

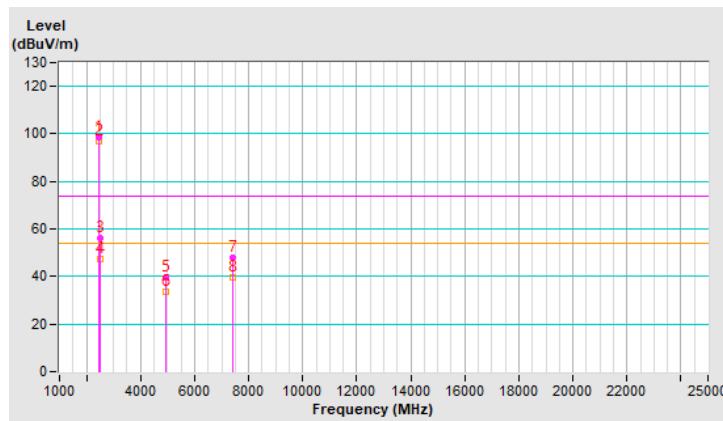


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	98.9 PK			3.24 H	275	102.3	-3.4
2	*2472.00	96.5 AV			3.24 H	275	99.9	-3.4
3	2483.50	60.1 PK	74.0	-13.9	3.24 H	275	63.5	-3.4
4	2483.50	52.1 AV	54.0	-1.9	3.24 H	275	55.5	-3.4
5	4944.00	39.1 PK	74.0	-34.9	3.23 H	277	37.9	1.2
6	4944.00	31.6 AV	54.0	-22.4	3.23 H	277	30.4	1.2
7	7416.00	46.4 PK	74.0	-27.6	3.26 H	256	39.2	7.2
8	7416.00	38.6 AV	54.0	-15.4	3.26 H	256	31.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

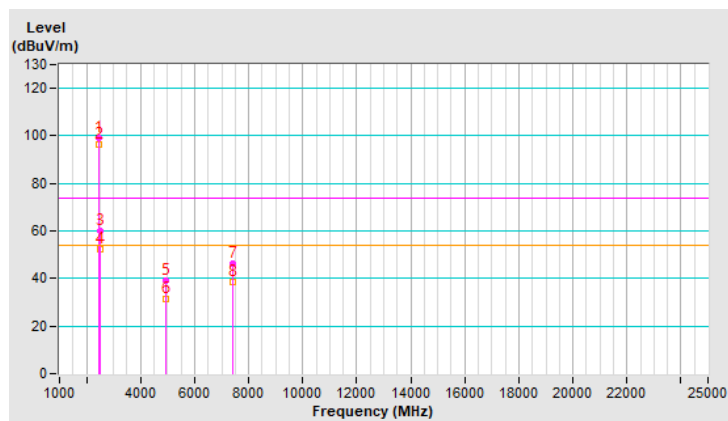


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.5 PK			1.11 V	360	102.9	-3.4
2	*2472.00	96.8 AV			1.11 V	360	100.2	-3.4
3	2483.50	58.0 PK	74.0	-16.0	1.11 V	360	61.4	-3.4
4	2483.50	50.8 AV	54.0	-3.2	1.11 V	360	54.2	-3.4
5	4944.00	40.4 PK	74.0	-33.6	3.15 V	299	39.2	1.2
6	4944.00	33.1 AV	54.0	-20.9	3.15 V	299	31.9	1.2
7	7416.00	45.7 PK	74.0	-28.3	3.56 V	306	38.5	7.2
8	7416.00	38.0 AV	54.0	-16.0	3.56 V	306	30.8	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

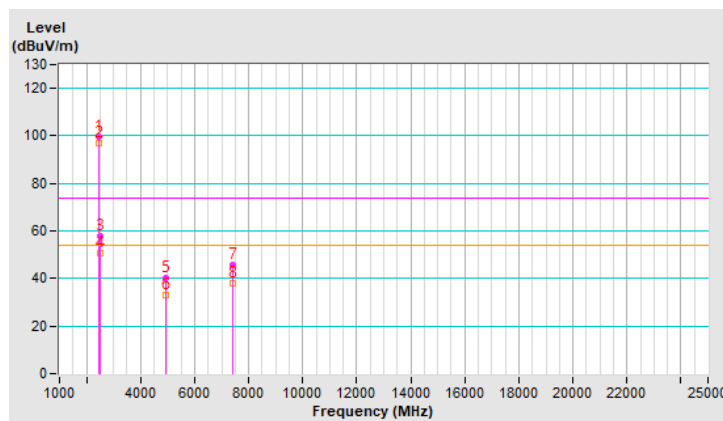


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.1 PK	74.0	-1.9	3.47 H	281	75.5	-3.4
2	2390.00	52.3 AV	54.0	-1.7	3.47 H	281	55.7	-3.4
3	*2412.00	113.8 PK			3.47 H	281	117.2	-3.4
4	*2412.00	104.1 AV			3.47 H	281	107.5	-3.4
5	4824.00	39.3 PK	74.0	-34.7	3.29 H	307	38.0	1.3
6	4824.00	28.1 AV	54.0	-25.9	3.29 H	307	26.8	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

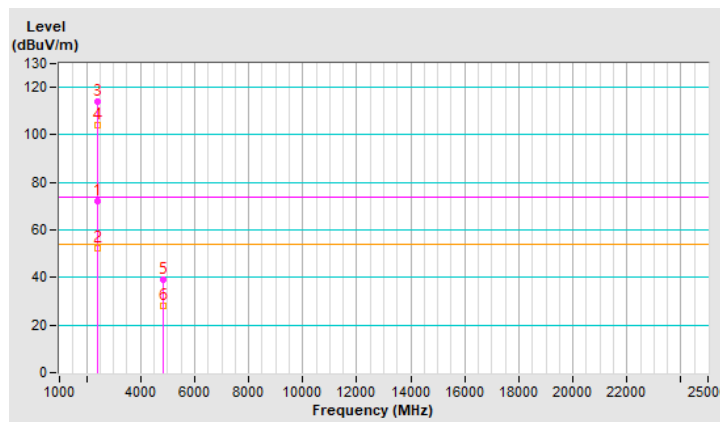


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.9 PK	74.0	-2.1	1.52 V	103	75.3	-3.4
2	2390.00	52.2 AV	54.0	-1.8	1.52 V	103	55.6	-3.4
3	*2412.00	112.8 PK			1.52 V	103	116.2	-3.4
4	*2412.00	102.7 AV			1.52 V	103	106.1	-3.4
5	4824.00	39.3 PK	74.0	-34.7	2.96 V	260	38.0	1.3
6	4824.00	30.1 AV	54.0	-23.9	2.96 V	260	28.8	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

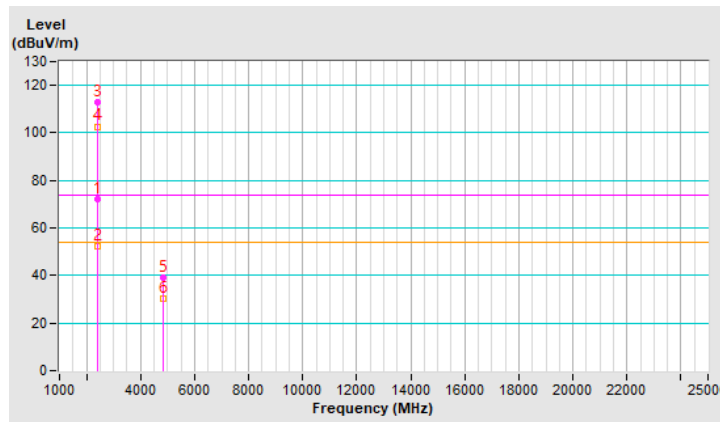


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.8 PK	74.0	-7.2	3.33 H	270	70.2	-3.4
2	2390.00	49.7 AV	54.0	-4.3	3.33 H	270	53.1	-3.4
3	*2437.00	116.0 PK			3.33 H	270	119.4	-3.4
4	*2437.00	106.0 AV			3.33 H	270	109.4	-3.4
5	2483.50	69.3 PK	74.0	-4.7	3.33 H	270	72.7	-3.4
6	2483.50	50.7 AV	54.0	-3.3	3.33 H	270	54.1	-3.4
7	4874.00	40.7 PK	74.0	-33.3	3.27 H	286	39.4	1.3
8	4874.00	30.2 AV	54.0	-23.8	3.27 H	286	28.9	1.3
9	7311.00	44.5 PK	74.0	-29.5	3.29 H	264	37.5	7.0
10	7311.00	34.1 AV	54.0	-19.9	3.29 H	264	27.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

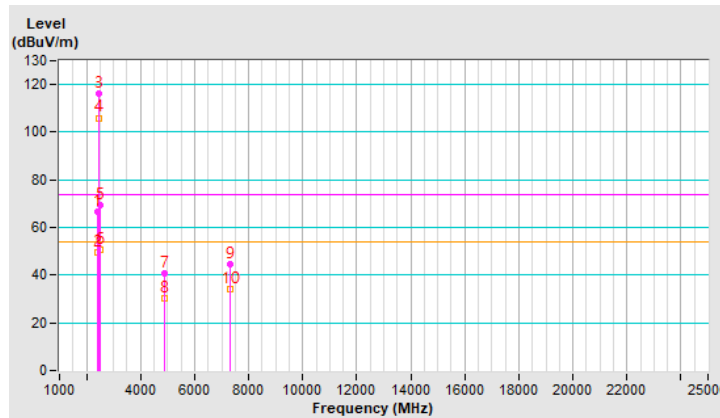


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.4 PK	74.0	-17.6	1.58 V	110	59.8	-3.4
2	2390.00	47.6 AV	54.0	-6.4	1.58 V	110	51.0	-3.4
3	*2437.00	100.6 PK			1.58 V	110	104.0	-3.4
4	*2437.00	100.1 AV			1.58 V	110	103.5	-3.4
5	2483.50	54.1 PK	74.0	-19.9	1.58 V	110	57.5	-3.4
6	2483.50	43.6 AV	54.0	-10.4	1.58 V	110	47.0	-3.4
7	4874.00	39.9 PK	74.0	-34.1	3.19 V	256	38.6	1.3
8	4874.00	33.9 AV	54.0	-20.1	3.19 V	256	32.6	1.3
9	7311.00	46.6 PK	74.0	-27.4	3.57 V	332	39.6	7.0
10	7311.00	39.4 AV	54.0	-14.6	3.57 V	332	32.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

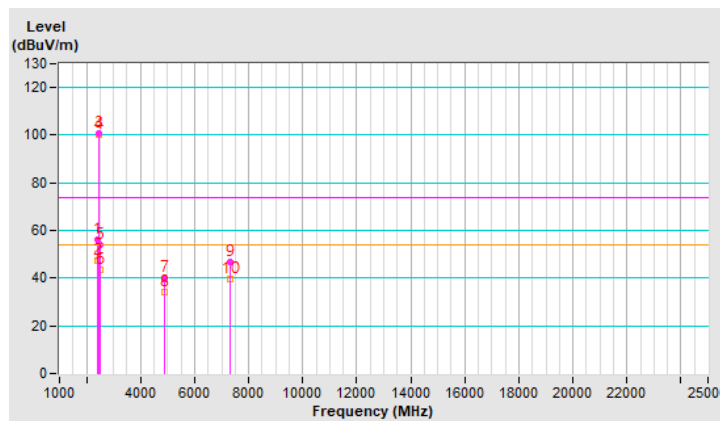


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.5 PK			3.29 H	303	113.9	-3.4
2	*2462.00	100.9 AV			3.29 H	303	104.3	-3.4
3	2483.50	70.5 PK	74.0	-3.5	3.29 H	303	73.9	-3.4
4	2483.50	51.9 AV	54.0	-2.1	3.29 H	303	55.3	-3.4
5	4924.00	40.7 PK	74.0	-33.3	3.15 H	288	39.5	1.2
6	4924.00	31.0 AV	54.0	-23.0	3.15 H	288	29.8	1.2
7	7386.00	45.4 PK	74.0	-28.6	3.12 H	243	38.4	7.0
8	7386.00	35.4 AV	54.0	-18.6	3.12 H	243	28.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

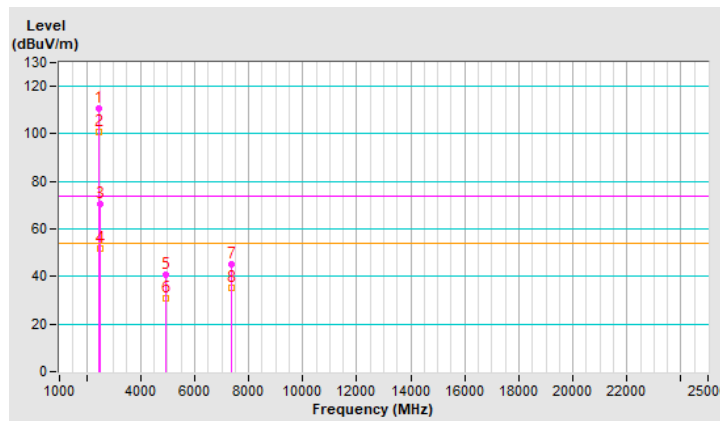


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.9 PK			1.48 V	78	112.3	-3.4
2	*2462.00	99.4 AV			1.48 V	78	102.8	-3.4
3	2483.50	70.2 PK	74.0	-3.8	1.48 V	78	73.6	-3.4
4	2483.50	51.3 AV	54.0	-2.7	1.48 V	78	54.7	-3.4
5	4924.00	39.8 PK	74.0	-34.2	3.14 V	282	38.6	1.2
6	4924.00	33.7 AV	54.0	-20.3	3.14 V	282	32.5	1.2
7	7386.00	47.7 PK	74.0	-26.3	3.57 V	274	40.7	7.0
8	7386.00	39.6 AV	54.0	-14.4	3.57 V	274	32.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

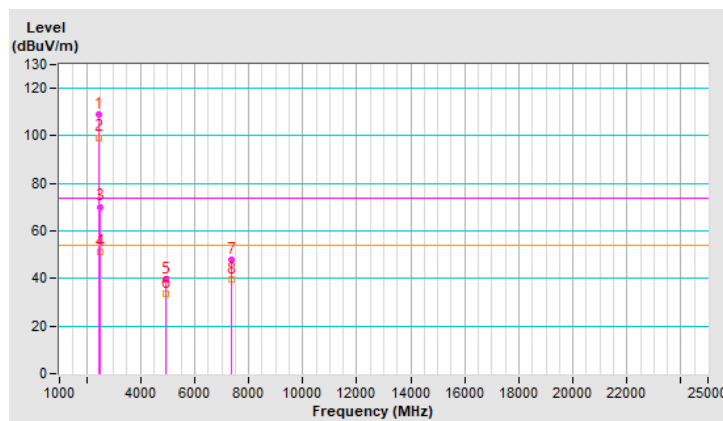


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.6 PK			3.24 H	276	111.0	-3.4
2	*2467.00	97.7 AV			3.24 H	276	101.1	-3.4
3	2483.50	72.7 PK	74.0	-1.3	3.24 H	276	76.1	-3.4
4	2483.50	51.5 AV	54.0	-2.5	3.24 H	276	54.9	-3.4
5	4934.00	40.9 PK	74.0	-33.1	3.21 H	230	39.7	1.2
6	4934.00	31.3 AV	54.0	-22.7	3.21 H	230	30.1	1.2
7	7401.00	44.3 PK	74.0	-29.7	3.19 H	225	37.3	7.0
8	7401.00	34.4 AV	54.0	-19.6	3.19 H	225	27.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

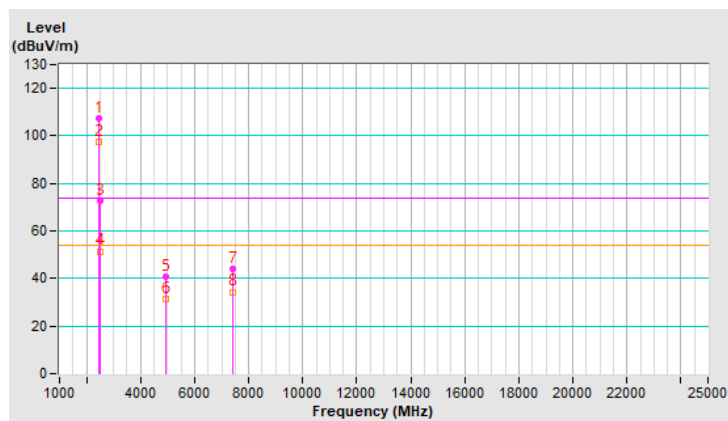


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	105.8 PK			1.62 V	122	109.2	-3.4
2	*2467.00	96.5 AV			1.62 V	122	99.9	-3.4
3	2483.50	72.2 PK	74.0	-1.8	1.62 V	122	75.6	-3.4
4	2483.50	51.8 AV	54.0	-2.2	1.62 V	122	55.2	-3.4
5	4934.00	39.0 PK	74.0	-35.0	3.24 V	257	37.8	1.2
6	4934.00	32.6 AV	54.0	-21.4	3.24 V	257	31.4	1.2
7	7401.00	45.9 PK	74.0	-28.1	3.64 V	316	38.9	7.0
8	7401.00	38.7 AV	54.0	-15.3	3.64 V	316	31.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

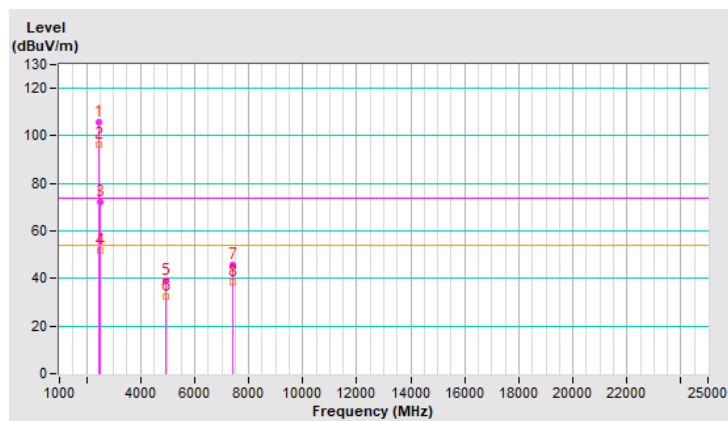


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	93.4 PK			3.14 H	276	96.8	-3.4
2	*2472.00	83.7 AV			3.14 H	276	87.1	-3.4
3	2483.50	72.6 PK	74.0	-1.4	3.14 H	276	76.0	-3.4
4	2483.50	49.7 AV	54.0	-4.3	3.14 H	276	53.1	-3.4
5	4944.00	41.7 PK	74.0	-32.3	3.24 H	253	40.5	1.2
6	4944.00	30.9 AV	54.0	-23.1	3.24 H	253	29.7	1.2
7	7416.00	43.8 PK	74.0	-30.2	3.21 H	275	36.6	7.2
8	7416.00	33.9 AV	54.0	-20.1	3.21 H	275	26.7	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

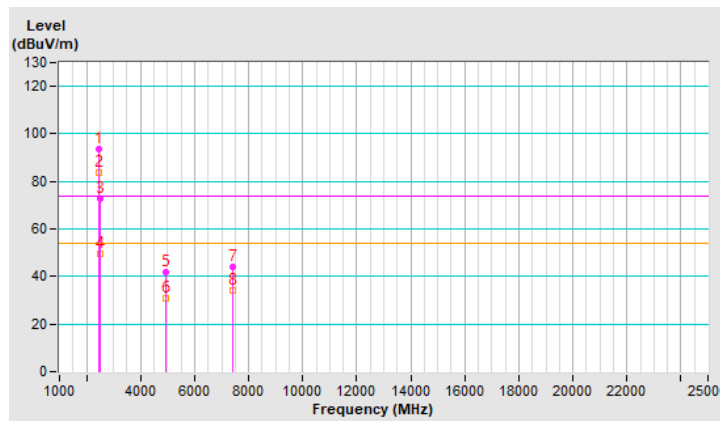


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	94.4 PK			1.57 V	102	97.8	-3.4
2	*2472.00	87.8 AV			1.57 V	102	91.2	-3.4
3	2483.50	69.6 PK	74.0	-4.4	1.57 V	102	73.0	-3.4
4	2483.50	52.5 AV	54.0	-1.5	1.57 V	102	55.9	-3.4
5	4944.00	41.4 PK	74.0	-32.6	3.11 V	290	40.2	1.2
6	4944.00	34.6 AV	54.0	-19.4	3.11 V	290	33.4	1.2
7	7416.00	47.0 PK	74.0	-27.0	3.59 V	303	39.8	7.2
8	7416.00	38.9 AV	54.0	-15.1	3.59 V	303	31.7	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

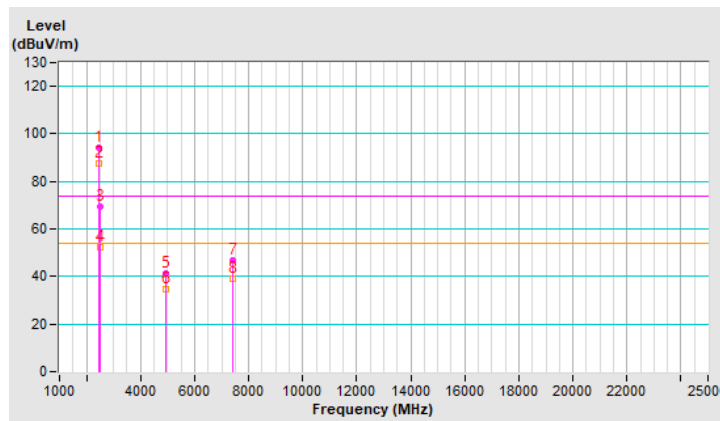


RF Mode	802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.0 PK	74.0	-6.0	3.38 H	295	71.4	-3.4
2	2390.00	52.9 AV	54.0	-1.1	3.38 H	295	56.3	-3.4
3	*2412.00	115.8 PK			3.38 H	295	119.2	-3.4
4	*2412.00	104.8 AV			3.38 H	295	108.2	-3.4
5	4824.00	40.1 PK	74.0	-33.9	3.30 H	262	38.8	1.3
6	4824.00	30.2 AV	54.0	-23.8	3.30 H	262	28.9	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

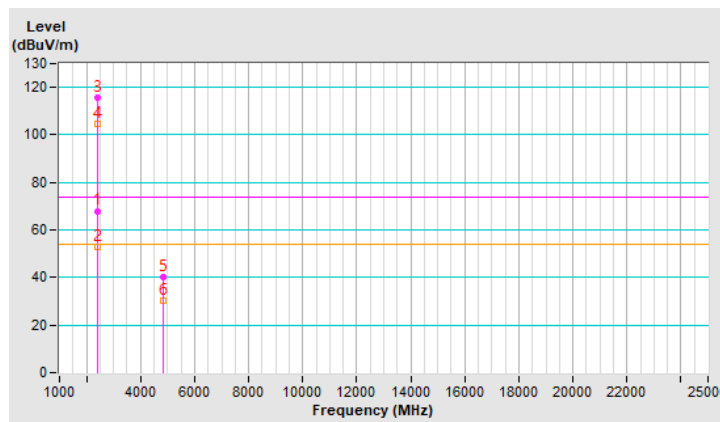


RF Mode	802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	1.42 V	122	69.8	-3.4
2	2390.00	51.8 AV	54.0	-2.2	1.42 V	122	55.2	-3.4
3	*2412.00	112.0 PK			1.42 V	122	115.4	-3.4
4	*2412.00	101.0 AV			1.42 V	122	104.4	-3.4
5	4824.00	41.1 PK	74.0	-32.9	3.20 V	270	39.8	1.3
6	4824.00	34.4 AV	54.0	-19.6	3.20 V	270	33.1	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

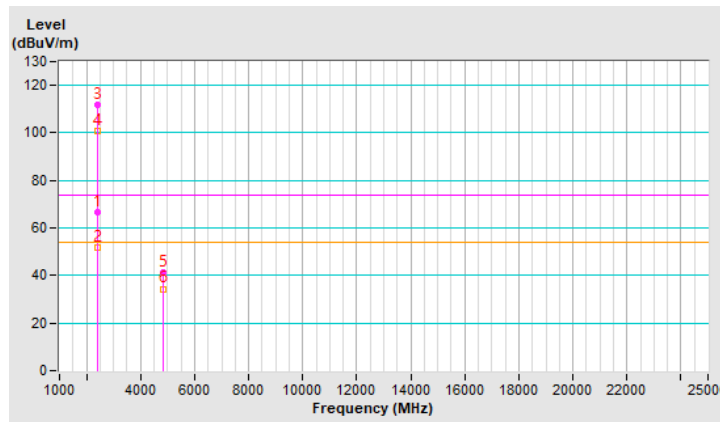


RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.2 PK	74.0	-8.8	3.35 H	272	68.6	-3.4
2	2390.00	51.7 AV	54.0	-2.3	3.35 H	272	55.1	-3.4
3	*2437.00	112.1 PK			3.35 H	272	115.5	-3.4
4	*2437.00	100.9 AV			3.35 H	272	104.3	-3.4
5	2483.50	65.3 PK	74.0	-8.7	3.35 H	272	68.7	-3.4
6	2483.50	52.5 AV	54.0	-1.5	3.35 H	272	55.9	-3.4
7	4874.00	39.7 PK	74.0	-34.3	3.32 H	271	38.4	1.3
8	4874.00	29.6 AV	54.0	-24.4	3.32 H	271	28.3	1.3
9	7311.00	43.6 PK	74.0	-30.4	3.42 H	265	36.6	7.0
10	7311.00	33.8 AV	54.0	-20.2	3.42 H	265	26.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

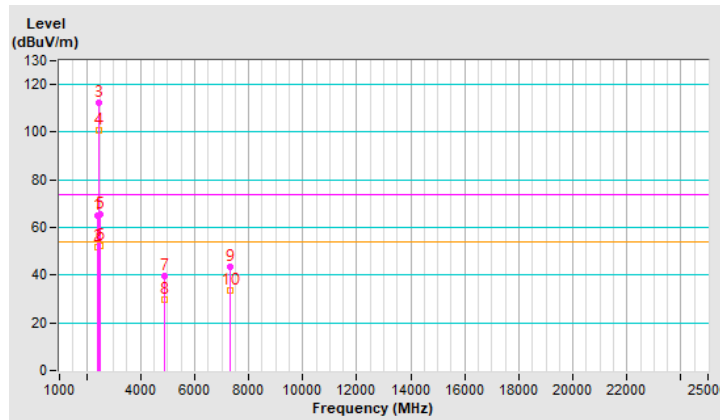


RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.9 PK	74.0	-12.1	1.03 V	360	65.3	-3.4
2	2390.00	51.9 AV	54.0	-2.1	1.03 V	360	55.3	-3.4
3	*2437.00	108.3 PK			1.03 V	360	111.7	-3.4
4	*2437.00	96.5 AV			1.03 V	360	99.9	-3.4
5	2483.50	61.6 PK	74.0	-12.4	1.03 V	360	65.0	-3.4
6	2483.50	51.3 AV	54.0	-2.7	1.03 V	360	54.7	-3.4
7	4874.00	41.0 PK	74.0	-33.0	3.15 V	272	39.7	1.3
8	4874.00	34.7 AV	54.0	-19.3	3.15 V	272	33.4	1.3
9	7311.00	46.7 PK	74.0	-27.3	3.56 V	322	39.7	7.0
10	7311.00	39.4 AV	54.0	-14.6	3.56 V	322	32.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

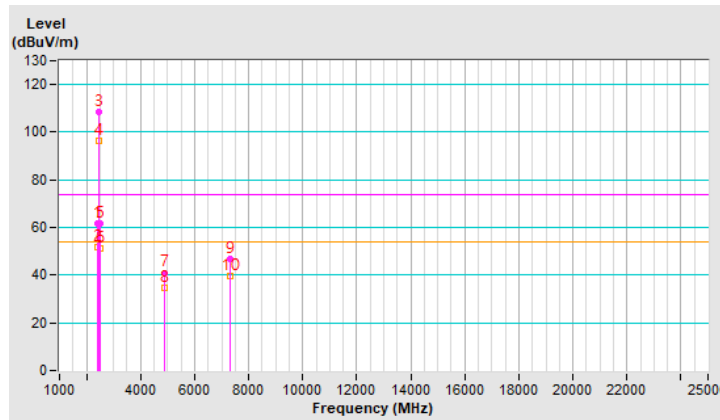


RF Mode	802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.2 PK			3.30 H	286	113.6	-3.4
2	*2462.00	98.6 AV			3.30 H	286	102.0	-3.4
3	2483.50	66.9 PK	74.0	-7.1	3.30 H	286	70.3	-3.4
4	2483.50	51.1 AV	54.0	-2.9	3.30 H	286	54.5	-3.4
5	4924.00	40.2 PK	74.0	-33.8	3.17 H	309	39.0	1.2
6	4924.00	30.4 AV	54.0	-23.6	3.17 H	309	29.2	1.2
7	7386.00	44.8 PK	74.0	-29.2	3.09 H	290	37.8	7.0
8	7386.00	34.7 AV	54.0	-19.3	3.09 H	290	27.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

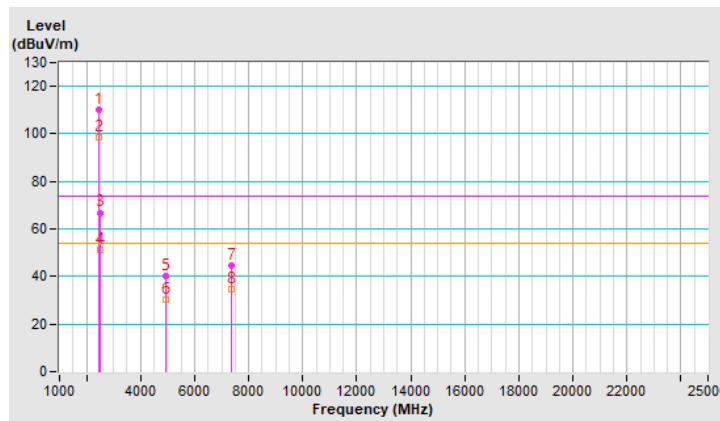


RF Mode	802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.5 PK			1.65 V	115	106.9	-3.4
2	*2462.00	93.4 AV			1.65 V	115	96.8	-3.4
3	2483.50	58.5 PK	74.0	-15.5	1.65 V	115	61.9	-3.4
4	2483.50	47.7 AV	54.0	-6.3	1.65 V	115	51.1	-3.4
5	4924.00	39.1 PK	74.0	-34.9	3.30 V	263	37.9	1.2
6	4924.00	33.5 AV	54.0	-20.5	3.30 V	263	32.3	1.2
7	7386.00	47.3 PK	74.0	-26.7	3.63 V	314	40.3	7.0
8	7386.00	39.2 AV	54.0	-14.8	3.63 V	314	32.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

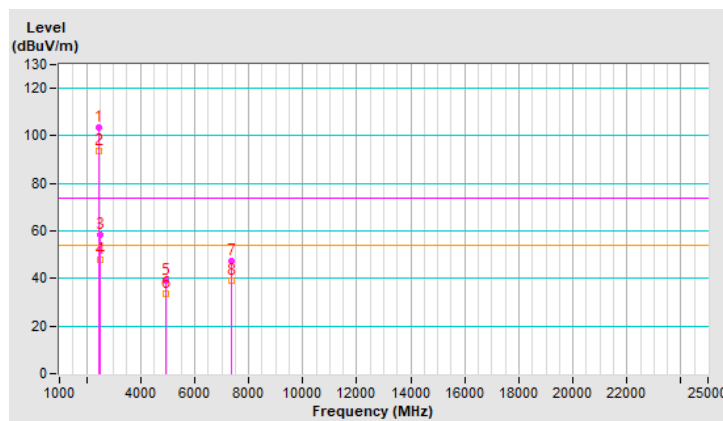


RF Mode	802.11ax (HE20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.7 PK			3.39 H	290	111.1	-3.4
2	*2467.00	95.7 AV			3.39 H	290	99.1	-3.4
3	2483.50	72.5 PK	74.0	-1.5	3.39 H	290	75.9	-3.4
4	2483.50	52.4 AV	54.0	-1.6	3.39 H	290	55.8	-3.4
5	4934.00	41.2 PK	74.0	-32.8	3.15 H	298	40.0	1.2
6	4934.00	31.1 AV	54.0	-22.9	3.15 H	298	29.9	1.2
7	7401.00	44.2 PK	74.0	-29.8	3.07 H	262	37.2	7.0
8	7401.00	33.9 AV	54.0	-20.1	3.07 H	262	26.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

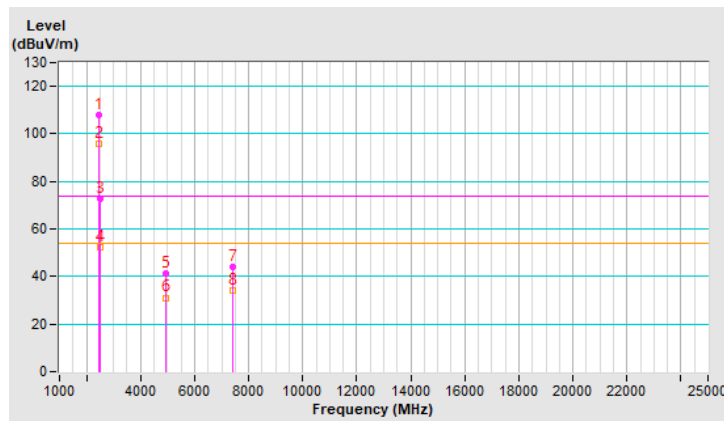


RF Mode	802.11ax (HE20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	105.4 PK			1.01 V	353	108.8	-3.4
2	*2467.00	92.3 AV			1.01 V	353	95.7	-3.4
3	2483.50	69.3 PK	74.0	-4.7	1.01 V	353	72.7	-3.4
4	2483.50	52.4 AV	54.0	-1.6	1.01 V	353	55.8	-3.4
5	4934.00	39.9 PK	74.0	-34.1	3.35 V	283	38.7	1.2
6	4934.00	33.5 AV	54.0	-20.5	3.35 V	283	32.3	1.2
7	7401.00	47.4 PK	74.0	-26.6	3.52 V	322	40.4	7.0
8	7401.00	39.1 AV	54.0	-14.9	3.52 V	322	32.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

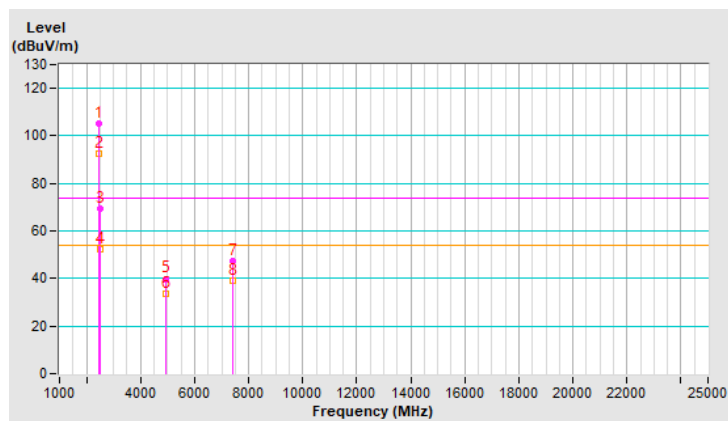


RF Mode	802.11ax (HE20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	91.9 PK			3.24 H	296	95.3	-3.4
2	*2472.00	80.5 AV			3.24 H	296	83.9	-3.4
3	2483.50	71.9 PK	74.0	-2.1	3.24 H	296	75.3	-3.4
4	2483.50	47.5 AV	54.0	-6.5	3.24 H	296	50.9	-3.4
5	4944.00	33.4 PK	74.0	-40.6	3.25 H	240	32.2	1.2
6	4944.00	23.8 AV	54.0	-30.2	3.25 H	240	22.6	1.2
7	7416.00	40.8 PK	74.0	-33.2	3.31 H	250	33.6	7.2
8	7416.00	30.5 AV	54.0	-23.5	3.31 H	250	23.3	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

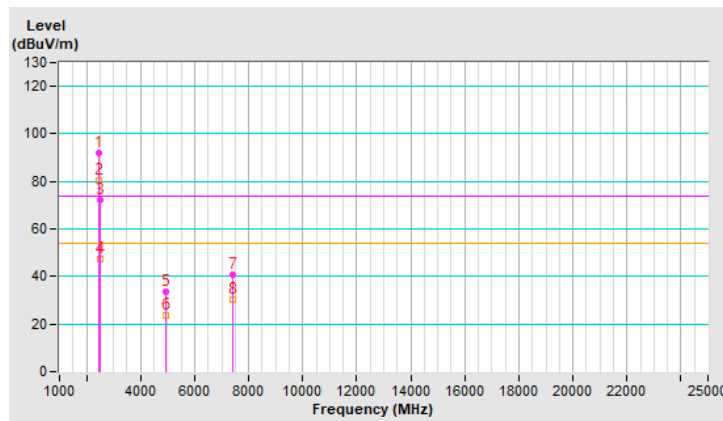


RF Mode	802.11ax (HE20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	90.6 PK			1.50 V	113	94.0	-3.4
2	*2472.00	86.7 AV			1.50 V	113	90.1	-3.4
3	2483.50	64.2 PK	74.0	-9.8	1.50 V	113	67.6	-3.4
4	2483.50	51.0 AV	54.0	-3.0	1.50 V	113	54.4	-3.4
5	4944.00	35.2 PK	74.0	-38.8	3.28 V	286	34.0	1.2
6	4944.00	28.1 AV	54.0	-25.9	3.28 V	286	26.9	1.2
7	7416.00	41.6 PK	74.0	-32.4	3.65 V	287	34.4	7.2
8	7416.00	32.6 AV	54.0	-21.4	3.65 V	287	25.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

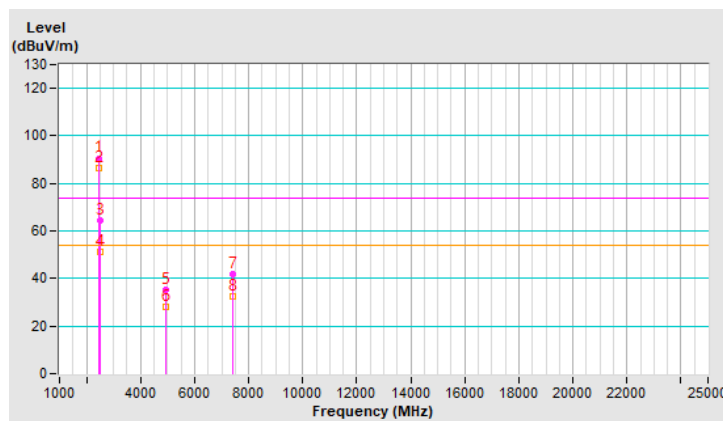


RF Mode	802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.2 PK	74.0	-0.8	3.41 H	306	76.6	-3.4
2	2390.00	50.4 AV	54.0	-3.6	3.41 H	306	53.8	-3.4
3	*2422.00	114.4 PK			3.41 H	306	117.8	-3.4
4	*2422.00	102.5 AV			3.41 H	306	105.9	-3.4
5	4844.00	39.7 PK	74.0	-34.3	3.07 H	253	38.4	1.3
6	4844.00	29.6 AV	54.0	-24.4	3.07 H	253	28.3	1.3
7	7266.00	41.0 PK	74.0	-33.0	3.33 H	360	33.8	7.2
8	7266.00	30.8 AV	54.0	-23.2	3.33 H	360	23.6	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

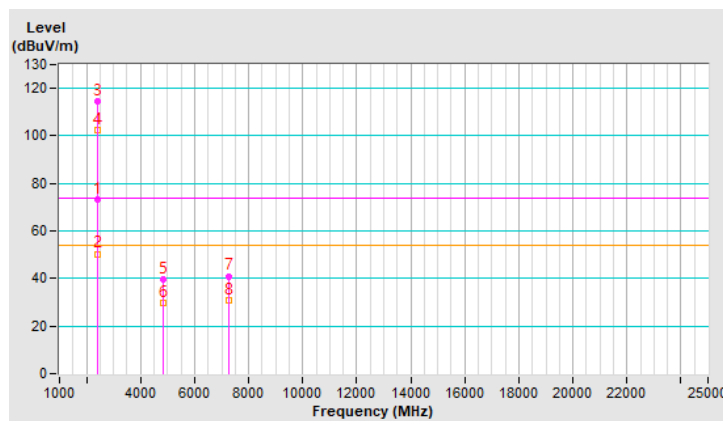


RF Mode	802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.7 PK	74.0	-3.3	1.55 V	108	74.1	-3.4
2	2390.00	49.4 AV	54.0	-4.6	1.55 V	108	52.8	-3.4
3	*2422.00	102.9 PK			1.55 V	108	106.3	-3.4
4	*2422.00	91.2 AV			1.55 V	108	94.6	-3.4
5	4844.00	39.2 PK	74.0	-34.8	3.15 V	241	37.9	1.3
6	4844.00	33.6 AV	54.0	-20.4	3.15 V	241	32.3	1.3
7	7266.00	46.7 PK	74.0	-27.3	3.50 V	322	39.5	7.2
8	7266.00	38.6 AV	54.0	-15.4	3.50 V	322	31.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

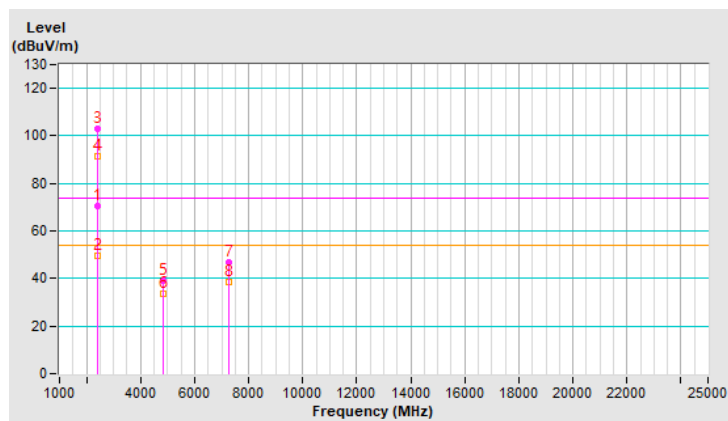


RF Mode	802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	3.13 H	281	72.3	-3.4
2	2390.00	52.1 AV	54.0	-1.9	3.13 H	281	55.5	-3.4
3	*2437.00	111.5 PK			3.13 H	281	114.9	-3.4
4	*2437.00	99.4 AV			3.13 H	281	102.8	-3.4
5	2483.50	71.9 PK	74.0	-2.1	3.13 H	281	75.3	-3.4
6	2483.50	51.7 AV	54.0	-2.3	3.13 H	281	55.1	-3.4
7	4874.00	40.5 PK	74.0	-33.5	3.18 H	243	39.2	1.3
8	4874.00	30.8 AV	54.0	-23.2	3.18 H	243	29.5	1.3
9	7311.00	42.9 PK	74.0	-31.1	3.56 H	155	35.9	7.0
10	7311.00	32.1 AV	54.0	-21.9	3.56 H	155	25.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

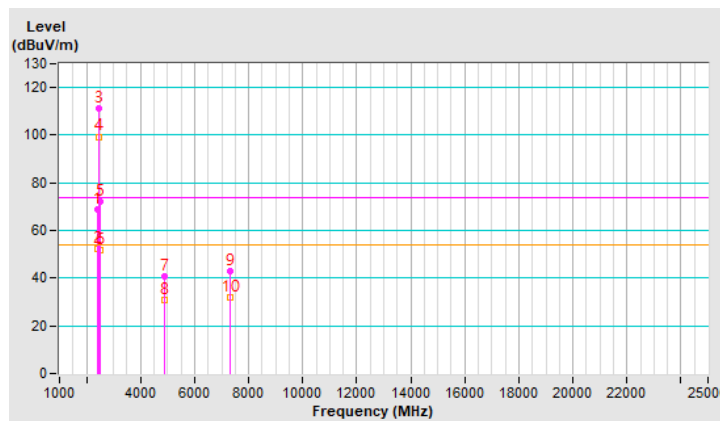


RF Mode	802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.7 PK	74.0	-9.3	1.02 V	316	68.1	-3.4
2	2390.00	48.3 AV	54.0	-5.7	1.02 V	316	51.7	-3.4
3	*2437.00	103.3 PK			1.02 V	316	106.7	-3.4
4	*2437.00	93.2 AV			1.02 V	316	96.6	-3.4
5	2483.50	70.2 PK	74.0	-3.8	1.02 V	316	73.6	-3.4
6	2483.50	49.0 AV	54.0	-5.0	1.02 V	316	52.4	-3.4
7	4874.00	40.1 PK	74.0	-33.9	3.11 V	272	38.8	1.3
8	4874.00	33.3 AV	54.0	-20.7	3.11 V	272	32.0	1.3
9	7311.00	47.0 PK	74.0	-27.0	3.63 V	283	40.0	7.0
10	7311.00	38.9 AV	54.0	-15.1	3.63 V	283	31.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

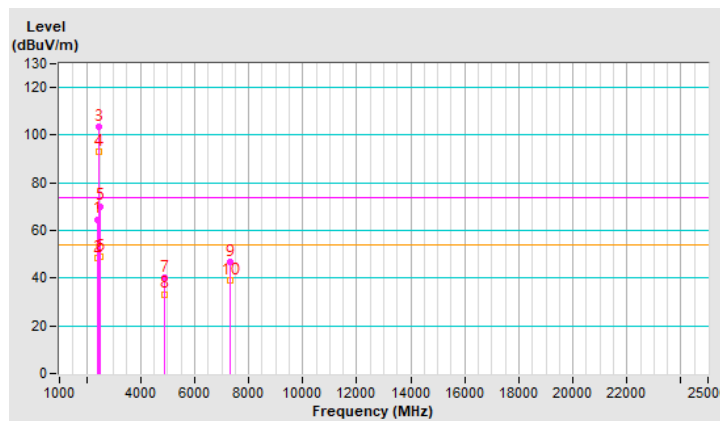


RF Mode	802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	109.8 PK			3.25 H	261	113.1	-3.3
2	*2452.00	96.7 AV			3.25 H	261	100.0	-3.3
3	2483.50	71.6 PK	74.0	-2.4	3.25 H	261	75.0	-3.4
4	2483.50	50.5 AV	54.0	-3.5	3.25 H	261	53.9	-3.4
5	4904.00	39.7 PK	74.0	-34.3	3.17 H	241	38.5	1.2
6	4904.00	29.5 AV	54.0	-24.5	3.17 H	241	28.3	1.2
7	7356.00	43.6 PK	74.0	-30.4	3.16 H	265	36.6	7.0
8	7356.00	33.7 AV	54.0	-20.3	3.16 H	265	26.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

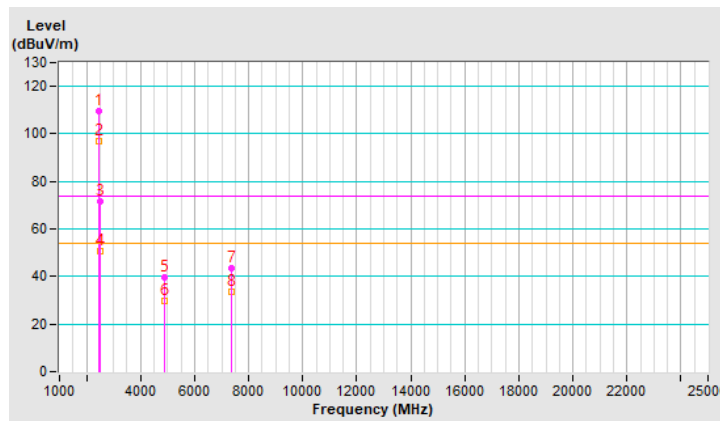


RF Mode	802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	108.2 PK			1.40 V	119	111.5	-3.3
2	*2452.00	94.8 AV			1.40 V	119	98.1	-3.3
3	2483.50	70.4 PK	74.0	-3.6	1.40 V	119	73.8	-3.4
4	2483.50	50.7 AV	54.0	-3.3	1.40 V	119	54.1	-3.4
5	4904.00	40.2 PK	74.0	-33.8	3.24 V	248	39.0	1.2
6	4904.00	34.1 AV	54.0	-19.9	3.24 V	248	32.9	1.2
7	7356.00	45.7 PK	74.0	-28.3	3.68 V	351	38.7	7.0
8	7356.00	38.2 AV	54.0	-15.8	3.68 V	351	31.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

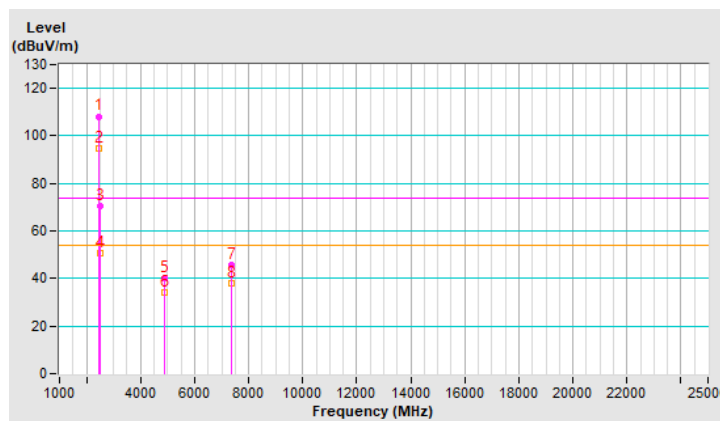


RF Mode	802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	107.1 PK			3.26 H	269	110.5	-3.4
2	*2457.00	94.3 AV			3.26 H	269	97.7	-3.4
3	2483.50	72.3 PK	74.0	-1.7	3.26 H	269	75.7	-3.4
4	2483.50	52.8 AV	54.0	-1.2	3.26 H	269	56.2	-3.4
5	4914.00	39.9 PK	74.0	-34.1	3.36 H	273	38.7	1.2
6	4914.00	30.3 AV	54.0	-23.7	3.36 H	273	29.1	1.2
7	7371.00	43.8 PK	74.0	-30.2	3.18 H	285	36.8	7.0
8	7371.00	33.1 AV	54.0	-20.9	3.18 H	285	26.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

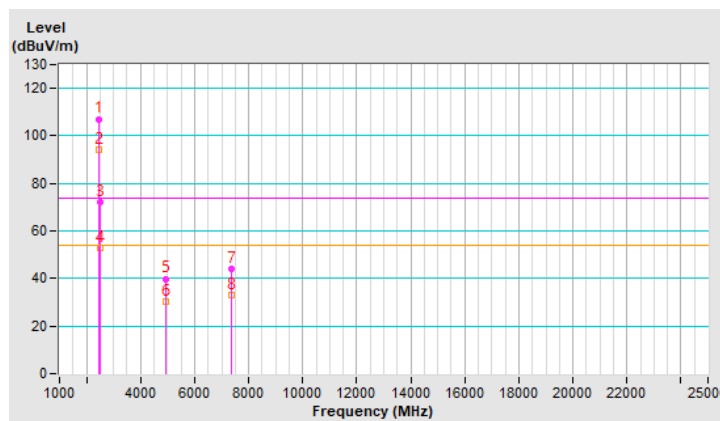


RF Mode	802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	102.2 PK			1.59 V	87	105.6	-3.4
2	*2457.00	91.7 AV			1.59 V	87	95.1	-3.4
3	2483.50	69.3 PK	74.0	-4.7	1.59 V	87	72.7	-3.4
4	2483.50	52.5 AV	54.0	-1.5	1.59 V	87	55.9	-3.4
5	4914.00	40.6 PK	74.0	-33.4	3.21 V	276	39.4	1.2
6	4914.00	34.6 AV	54.0	-19.4	3.21 V	276	33.4	1.2
7	7371.00	47.6 PK	74.0	-26.4	3.59 V	267	40.6	7.0
8	7371.00	40.2 AV	54.0	-13.8	3.59 V	267	33.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

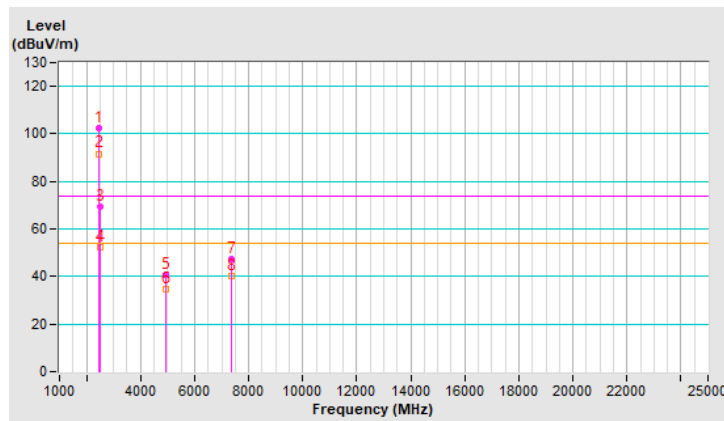


RF Mode	802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.7 PK			3.33 H	284	99.1	-3.4
2	*2462.00	83.3 AV			3.33 H	284	86.7	-3.4
3	2483.50	73.0 PK	74.0	-1.0	3.33 H	284	76.4	-3.4
4	2483.50	49.0 AV	54.0	-5.0	3.33 H	284	52.4	-3.4
5	4924.00	40.8 PK	74.0	-33.2	3.28 H	314	39.6	1.2
6	4924.00	30.7 AV	54.0	-23.3	3.28 H	314	29.5	1.2
7	7386.00	44.7 PK	74.0	-29.3	3.18 H	295	37.7	7.0
8	7386.00	34.7 AV	54.0	-19.3	3.18 H	295	27.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

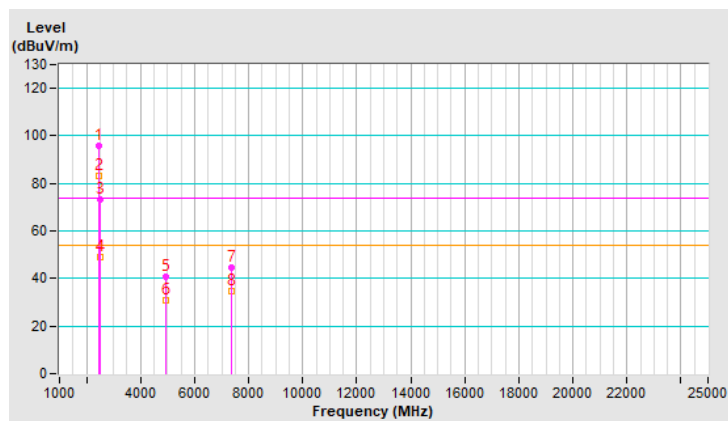


RF Mode	802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	93.8 PK			1.40 V	111	97.2	-3.4
2	*2462.00	84.2 AV			1.40 V	111	87.6	-3.4
3	2483.50	70.7 PK	74.0	-3.3	1.40 V	111	74.1	-3.4
4	2483.50	52.3 AV	54.0	-1.7	1.40 V	111	55.7	-3.4
5	4924.00	41.2 PK	74.0	-32.8	3.13 V	255	40.0	1.2
6	4924.00	34.3 AV	54.0	-19.7	3.13 V	255	33.1	1.2
7	7386.00	46.6 PK	74.0	-27.4	3.56 V	309	39.6	7.0
8	7386.00	39.2 AV	54.0	-14.8	3.56 V	309	32.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

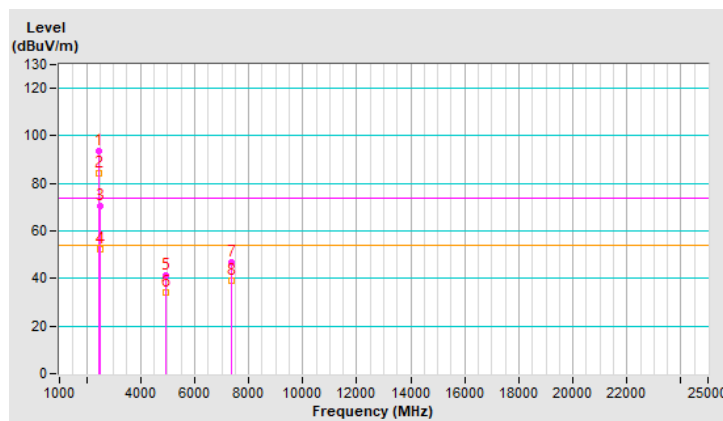


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.9 PK	74.0	-15.1	2.40 H	335	62.3	-3.4
2	2390.00	43.1 AV	54.0	-10.9	2.40 H	335	46.5	-3.4
3	*2412.00	109.8 PK			2.40 H	335	113.2	-3.4
4	*2412.00	99.4 AV			2.40 H	335	102.8	-3.4
5	4824.00	34.3 PK	74.0	-39.7	2.30 H	250	33.0	1.3
6	4824.00	25.4 AV	54.0	-28.6	2.30 H	250	24.1	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

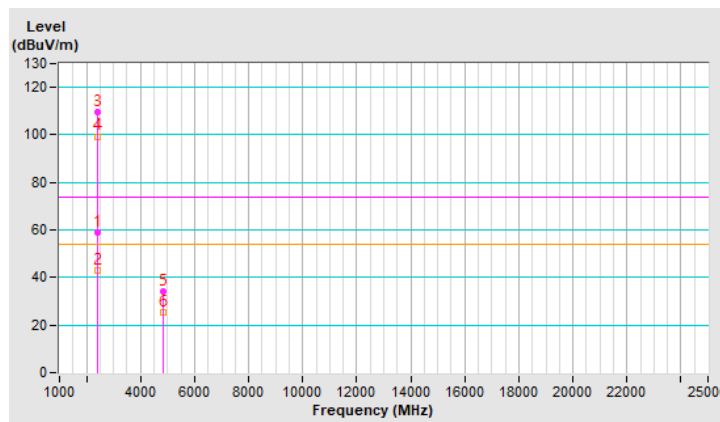


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.2 PK	74.0	-1.8	1.50 V	192	75.6	-3.4
2	2390.00	52.4 AV	54.0	-1.6	1.50 V	192	55.8	-3.4
3	*2412.00	118.0 PK			1.50 V	192	121.4	-3.4
4	*2412.00	107.4 AV			1.50 V	192	110.8	-3.4
5	4824.00	44.6 PK	74.0	-29.4	1.33 V	250	43.3	1.3
6	4824.00	30.1 AV	54.0	-23.9	1.33 V	250	28.8	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

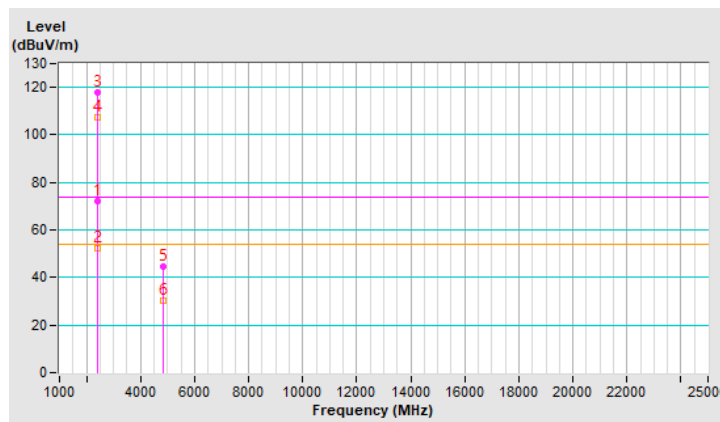


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.7 PK	74.0	-20.3	2.33 H	351	57.1	-3.4
2	2390.00	41.4 AV	54.0	-12.6	2.33 H	351	44.8	-3.4
3	*2437.00	114.3 PK			2.33 H	351	117.7	-3.4
4	*2437.00	103.4 AV			2.33 H	351	106.8	-3.4
5	2483.50	53.4 PK	74.0	-20.6	2.33 H	251	56.8	-3.4
6	2483.50	41.1 AV	54.0	-12.9	2.33 H	251	44.5	-3.4
7	4874.00	38.3 PK	74.0	-35.7	2.41 H	255	37.0	1.3
8	4874.00	29.5 AV	54.0	-24.5	2.41 H	255	28.2	1.3
9	7311.00	37.4 PK	74.0	-36.6	2.41 H	255	30.4	7.0
10	7311.00	28.4 AV	54.0	-25.6	2.41 H	255	21.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

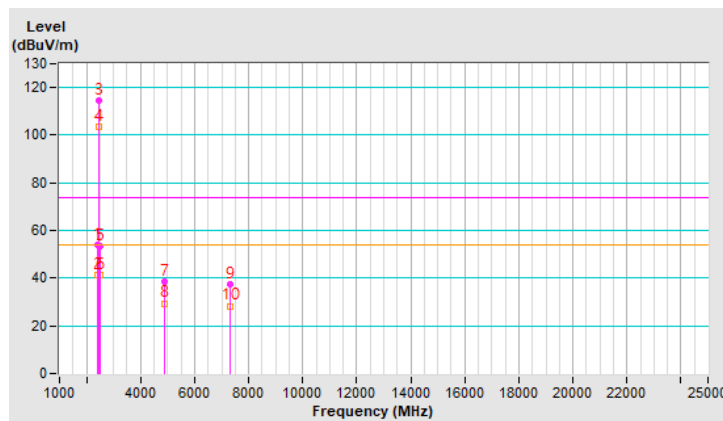


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.6 PK	74.0	-4.4	1.55 V	200	73.0	-3.4
2	2390.00	47.1 AV	54.0	-6.9	1.55 V	200	50.5	-3.4
3	*2437.00	124.5 PK			1.55 V	200	127.9	-3.4
4	*2437.00	113.6 AV			1.55 V	200	117.0	-3.4
5	2483.50	58.6 PK	74.0	-15.4	1.55 V	200	62.0	-3.4
6	2483.50	45.6 AV	54.0	-8.4	1.55 V	200	49.0	-3.4
7	4874.00	48.5 PK	74.0	-25.5	1.30 V	254	47.2	1.3
8	4874.00	33.5 AV	54.0	-20.5	1.30 V	254	32.2	1.3
9	7311.00	47.5 PK	74.0	-26.5	1.18 V	250	40.5	7.0
10	7311.00	32.4 AV	54.0	-21.6	1.18 V	250	25.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

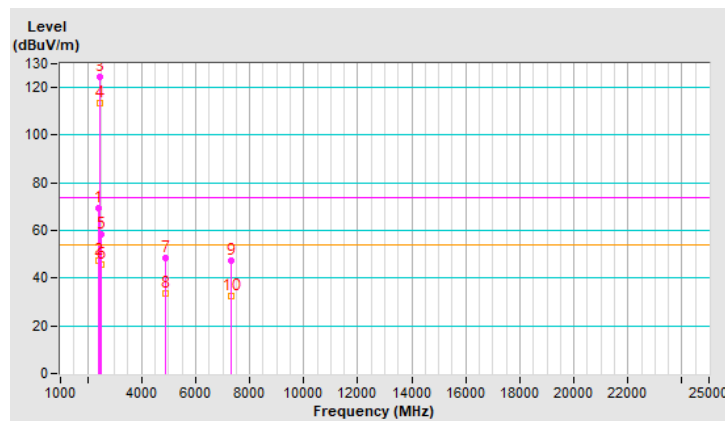


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.5 PK			2.40 H	300	110.9	-3.4
2	*2462.00	97.4 AV			2.40 H	300	100.8	-3.4
3	2483.50	57.5 PK	74.0	-16.5	2.40 H	300	60.9	-3.4
4	2483.50	42.6 AV	54.0	-11.4	2.40 H	300	46.0	-3.4
5	4924.00	33.4 PK	74.0	-40.6	2.40 H	250	32.2	1.2
6	4924.00	24.3 AV	54.0	-29.7	2.40 H	250	23.1	1.2
7	7386.00	33.3 PK	74.0	-40.7	2.50 H	250	26.3	7.0
8	7386.00	24.4 AV	54.0	-29.6	2.50 H	250	17.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

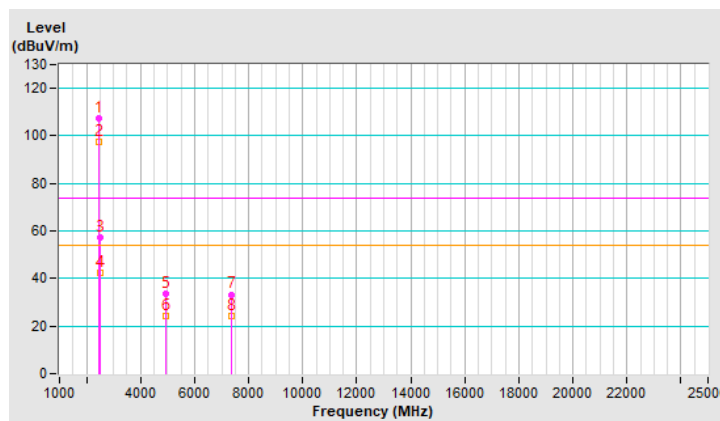


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.2 PK			1.54 V	200	121.6	-3.4
2	*2462.00	108.2 AV			1.54 V	200	111.6	-3.4
3	2483.50	72.4 PK	74.0	-1.6	1.54 V	200	75.8	-3.4
4	2483.50	47.6 AV	54.0	-6.4	1.54 V	200	51.0	-3.4
5	4924.00	43.4 PK	74.0	-30.6	1.28 V	256	42.2	1.2
6	4924.00	28.4 AV	54.0	-25.6	1.28 V	256	27.2	1.2
7	7386.00	43.3 PK	74.0	-30.7	1.30 V	215	36.3	7.0
8	7386.00	28.4 AV	54.0	-25.6	1.30 V	215	21.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

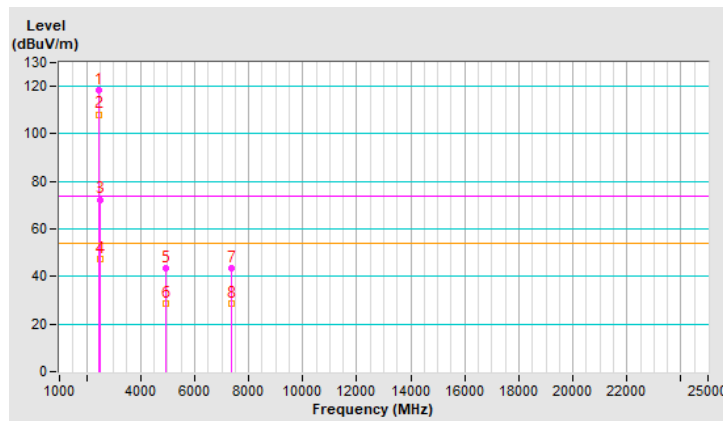


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.3 PK			2.33 H	321	110.7	-3.4
2	*2467.00	97.3 AV			2.33 H	321	100.7	-3.4
3	2483.50	57.3 PK	74.0	-16.7	2.33 H	321	60.7	-3.4
4	2483.50	42.3 AV	54.0	-11.7	2.33 H	321	45.7	-3.4
5	4934.00	33.4 PK	74.0	-40.6	2.44 H	252	32.2	1.2
6	4934.00	24.2 AV	54.0	-29.8	2.44 H	252	23.0	1.2
7	7401.00	33.4 PK	74.0	-40.6	2.41 H	233	26.4	7.0
8	7401.00	24.1 AV	54.0	-29.9	2.41 H	233	17.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

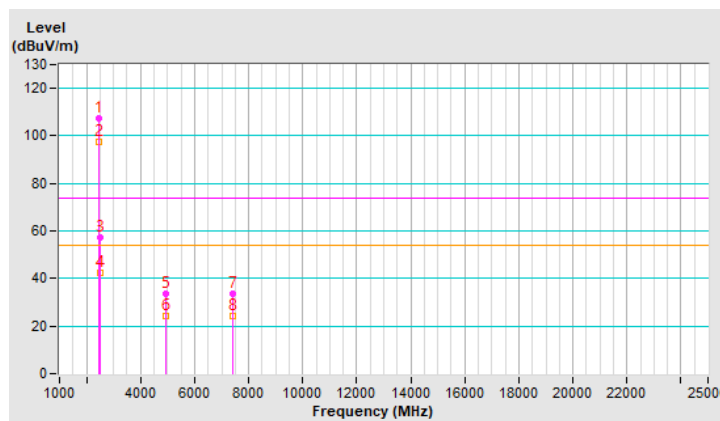


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	117.2 PK			1.55 V	193	120.6	-3.4
2	*2467.00	107.0 AV			1.55 V	193	110.4	-3.4
3	2483.50	72.4 PK	74.0	-1.6	1.55 V	193	75.8	-3.4
4	2483.50	48.8 AV	54.0	-5.2	1.55 V	193	52.2	-3.4
5	4934.00	43.4 PK	74.0	-30.6	1.21 V	252	42.2	1.2
6	4934.00	28.4 AV	54.0	-25.6	1.21 V	252	27.2	1.2
7	7401.00	43.3 PK	74.0	-30.7	1.22 V	214	36.3	7.0
8	7401.00	28.4 AV	54.0	-25.6	1.22 V	214	21.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

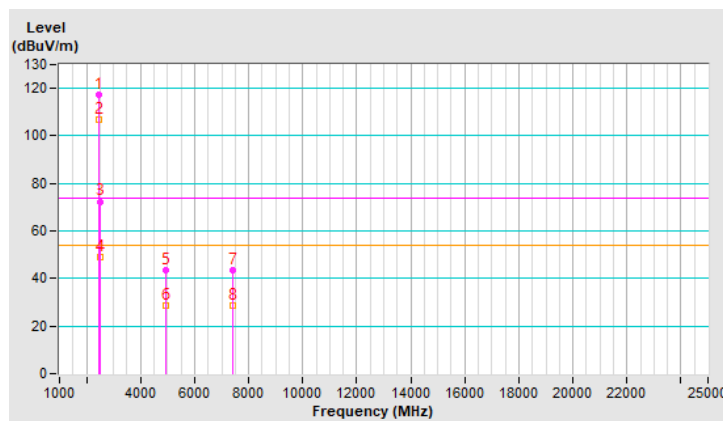


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	101.9 PK			2.33 H	327	105.3	-3.4
2	*2472.00	92.8 AV			2.33 H	327	96.2	-3.4
3	2483.50	53.3 PK	74.0	-20.7	2.33 H	327	56.7	-3.4
4	2483.50	38.1 AV	54.0	-15.9	2.33 H	327	41.5	-3.4
5	4944.00	37.0 PK	74.0	-37.0	2.09 H	240	35.8	1.2
6	4944.00	23.3 AV	54.0	-30.7	2.09 H	240	22.1	1.2
7	7416.00	37.2 PK	74.0	-36.8	2.44 H	231	30.0	7.2
8	7416.00	23.3 AV	54.0	-30.7	2.44 H	231	16.1	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

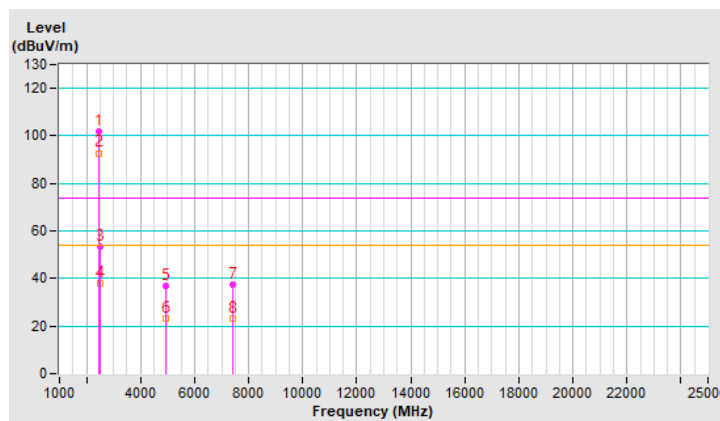


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.4 PK			1.55 V	145	113.8	-3.4
2	*2472.00	101.9 AV			1.55 V	145	105.3	-3.4
3	2483.50	72.4 PK	74.0	-1.6	1.55 V	145	75.8	-3.4
4	2483.50	51.2 AV	54.0	-2.8	1.55 V	145	54.6	-3.4
5	4944.00	37.0 PK	74.0	-37.0	1.19 V	126	35.8	1.2
6	4944.00	24.0 AV	54.0	-30.0	1.19 V	126	22.8	1.2
7	7416.00	36.6 PK	74.0	-37.4	1.23 V	118	29.4	7.2
8	7416.00	23.9 AV	54.0	-30.1	1.23 V	118	16.7	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

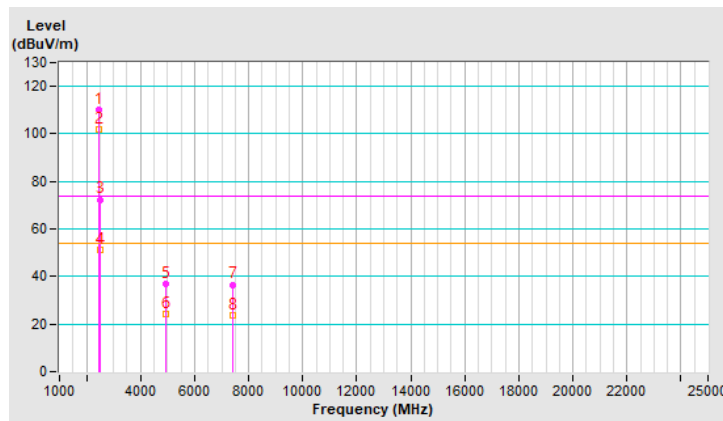


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.2 PK	74.0	-15.8	2.28 H	330	61.6	-3.4
2	2390.00	43.3 AV	54.0	-10.7	2.28 H	330	46.7	-3.4
3	*2412.00	109.8 PK			2.28 H	330	113.2	-3.4
4	*2412.00	98.0 AV			2.28 H	330	101.4	-3.4
5	4824.00	34.0 PK	74.0	-40.0	2.49 H	242	32.7	1.3
6	4824.00	24.9 AV	54.0	-29.1	2.49 H	242	23.6	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

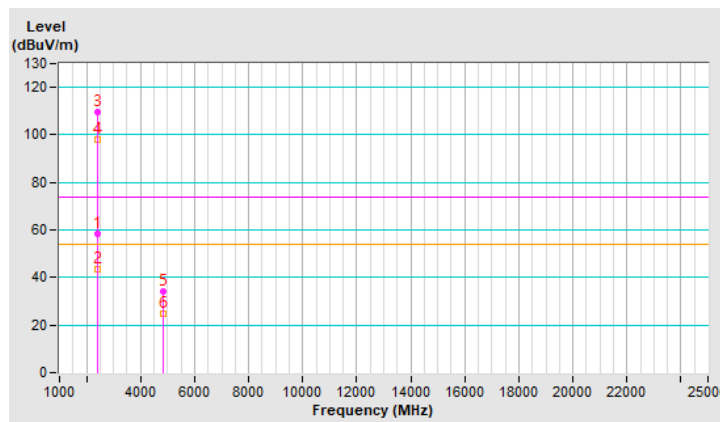


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.4 PK	74.0	-4.6	1.48 V	143	72.8	-3.4
2	2390.00	52.4 AV	54.0	-1.6	1.48 V	143	55.8	-3.4
3	*2412.00	120.4 PK			1.48 V	143	123.8	-3.4
4	*2412.00	108.8 AV			1.48 V	143	112.2	-3.4
5	4824.00	44.9 PK	74.0	-29.1	1.23 V	128	43.6	1.3
6	4824.00	29.7 AV	54.0	-24.3	1.23 V	128	28.4	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

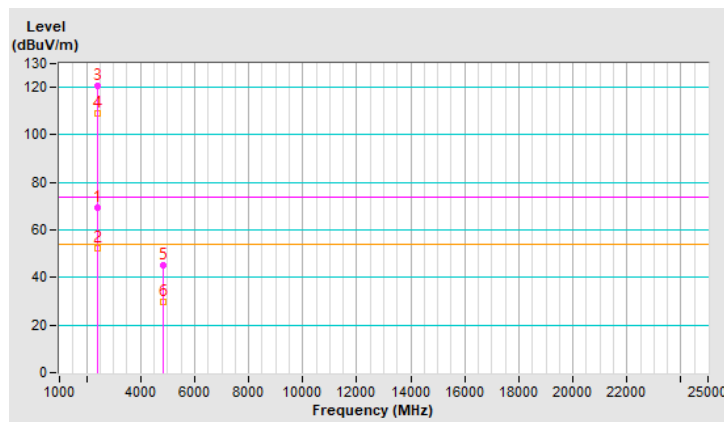


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.6 PK	74.0	-20.4	2.39 H	360	57.0	-3.4
2	2390.00	41.4 AV	54.0	-12.6	2.39 H	360	44.8	-3.4
3	*2437.00	112.9 PK			2.39 H	360	116.3	-3.4
4	*2437.00	102.0 AV			2.39 H	360	105.4	-3.4
5	2483.50	53.1 PK	74.0	-20.9	2.39 H	360	56.5	-3.4
6	2483.50	40.7 AV	54.0	-13.3	2.39 H	360	44.1	-3.4
7	4874.00	38.4 PK	74.0	-35.6	2.46 H	259	37.1	1.3
8	4874.00	29.5 AV	54.0	-24.5	2.46 H	259	28.2	1.3
9	7311.00	37.6 PK	74.0	-36.4	2.43 H	261	30.6	7.0
10	7311.00	29.2 AV	54.0	-24.8	2.43 H	261	22.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

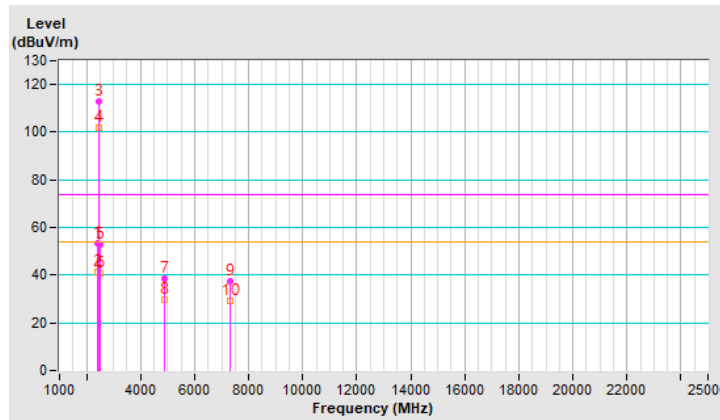


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.1 PK	74.0	-7.9	1.52 V	138	69.5	-3.4
2	2390.00	49.5 AV	54.0	-4.5	1.52 V	138	52.9	-3.4
3	*2437.00	122.8 PK			1.52 V	138	126.2	-3.4
4	*2437.00	112.4 AV			1.52 V	138	115.8	-3.4
5	2483.50	58.1 PK	74.0	-15.9	1.52 V	138	61.5	-3.4
6	2483.50	46.6 AV	54.0	-7.4	1.52 V	138	50.0	-3.4
7	4874.00	48.2 PK	74.0	-25.8	1.23 V	126	46.9	1.3
8	4874.00	33.5 AV	54.0	-20.5	1.23 V	126	32.2	1.3
9	7311.00	47.5 PK	74.0	-26.5	1.15 V	119	40.5	7.0
10	7311.00	32.6 AV	54.0	-21.4	1.15 V	119	25.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

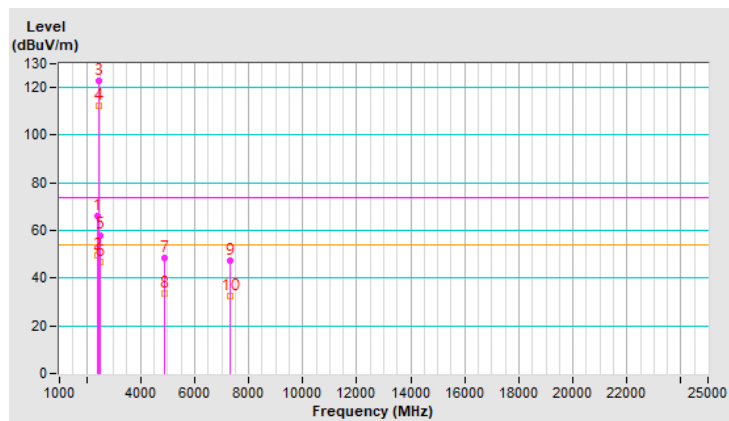


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.4 PK			2.30 H	331	110.8	-3.4
2	*2462.00	97.7 AV			2.30 H	331	101.1	-3.4
3	2483.50	50.8 PK	74.0	-23.2	2.30 H	331	54.2	-3.4
4	2483.50	40.7 AV	54.0	-13.3	2.30 H	331	44.1	-3.4
5	4924.00	36.1 PK	74.0	-37.9	2.39 H	261	34.9	1.2
6	4924.00	25.5 AV	54.0	-28.5	2.39 H	261	24.3	1.2
7	7386.00	35.3 PK	74.0	-38.7	2.48 H	248	28.3	7.0
8	7386.00	26.1 AV	54.0	-27.9	2.48 H	248	19.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

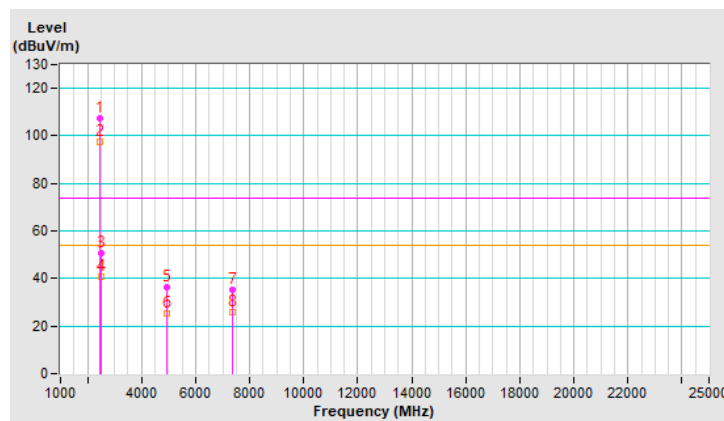


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.2 PK			1.62 V	145	121.6	-3.4
2	*2462.00	107.1 AV			1.62 V	145	110.5	-3.4
3	2483.50	72.5 PK	74.0	-1.5	1.62 V	145	75.9	-3.4
4	2483.50	52.0 AV	54.0	-2.0	1.62 V	145	55.4	-3.4
5	4924.00	46.5 PK	74.0	-27.5	1.24 V	136	45.3	1.2
6	4924.00	31.2 AV	54.0	-22.8	1.24 V	136	30.0	1.2
7	7386.00	45.0 PK	74.0	-29.0	1.21 V	116	38.0	7.0
8	7386.00	30.3 AV	54.0	-23.7	1.21 V	116	23.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

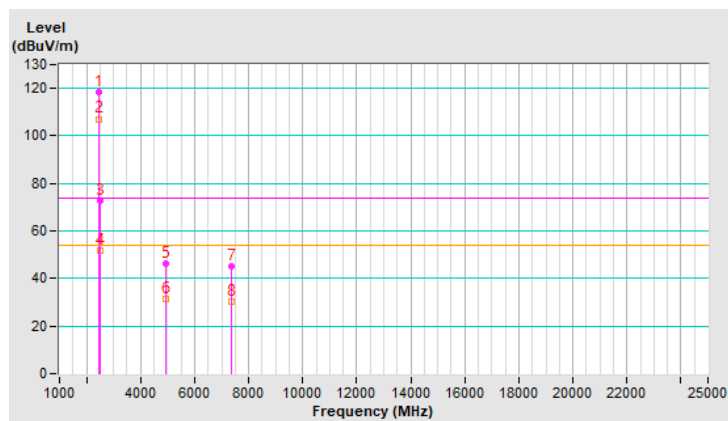


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.8 PK			2.36 H	319	111.2	-3.4
2	*2467.00	96.5 AV			2.36 H	319	99.9	-3.4
3	2483.50	57.2 PK	74.0	-16.8	2.38 H	332	60.6	-3.4
4	2483.50	42.3 AV	54.0	-11.7	2.38 H	332	45.7	-3.4
5	4934.00	33.6 PK	74.0	-40.4	2.34 H	245	32.4	1.2
6	4934.00	24.5 AV	54.0	-29.5	2.34 H	245	23.3	1.2
7	7401.00	33.5 PK	74.0	-40.5	2.46 H	233	26.5	7.0
8	7401.00	24.8 AV	54.0	-29.2	2.46 H	233	17.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

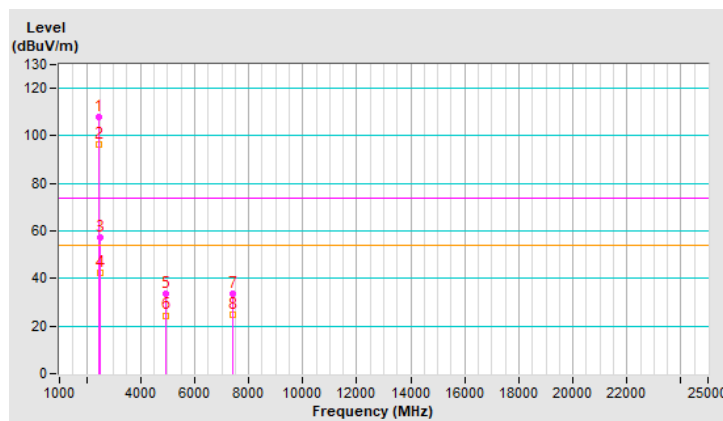


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.7 PK			1.52 V	137	120.1	-3.4
2	*2467.00	106.1 AV			1.52 V	137	109.5	-3.4
3	2483.50	72.3 PK	74.0	-1.7	1.52 V	137	75.7	-3.4
4	2483.50	50.4 AV	54.0	-3.6	1.52 V	137	53.8	-3.4
5	4934.00	43.6 PK	74.0	-30.4	1.20 V	134	42.4	1.2
6	4934.00	28.8 AV	54.0	-25.2	1.20 V	134	27.6	1.2
7	7401.00	43.2 PK	74.0	-30.8	1.18 V	106	36.2	7.0
8	7401.00	28.3 AV	54.0	-25.7	1.18 V	106	21.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

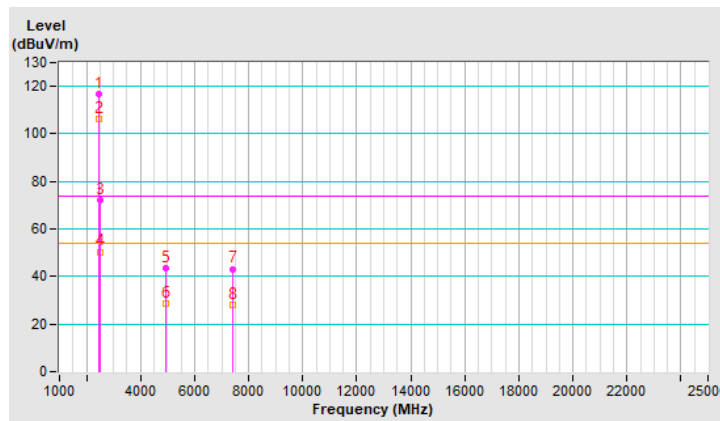


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.7 PK			2.31 H	333	103.1	-3.4
2	*2472.00	89.2 AV			2.31 H	333	92.6	-3.4
3	2483.50	52.6 PK	74.0	-21.4	2.31 H	333	56.0	-3.4
4	2483.50	37.8 AV	54.0	-16.2	2.31 H	333	41.2	-3.4
5	4944.00	37.3 PK	74.0	-36.7	2.12 H	252	36.1	1.2
6	4944.00	23.4 AV	54.0	-30.6	2.12 H	252	22.2	1.2
7	7416.00	36.7 PK	74.0	-37.3	2.44 H	231	29.5	7.2
8	7416.00	22.8 AV	54.0	-31.2	2.44 H	231	15.6	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

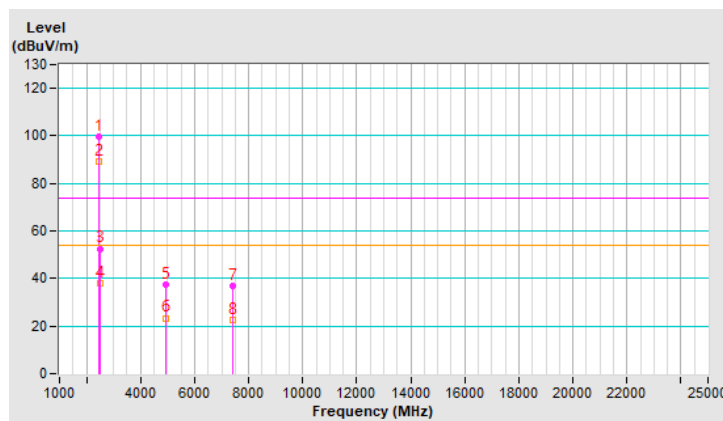


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.1 PK			1.53 V	195	112.5	-3.4
2	*2472.00	98.7 AV			1.53 V	195	102.1	-3.4
3	2483.50	68.5 PK	74.0	-5.5	1.53 V	195	71.9	-3.4
4	2483.50	52.5 AV	54.0	-1.5	1.53 V	195	55.9	-3.4
5	4944.00	37.5 PK	74.0	-36.5	1.21 V	252	36.3	1.2
6	4944.00	24.6 AV	54.0	-29.4	1.21 V	252	23.4	1.2
7	7416.00	36.7 PK	74.0	-37.3	1.22 V	214	29.5	7.2
8	7416.00	23.9 AV	54.0	-30.1	1.22 V	214	16.7	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

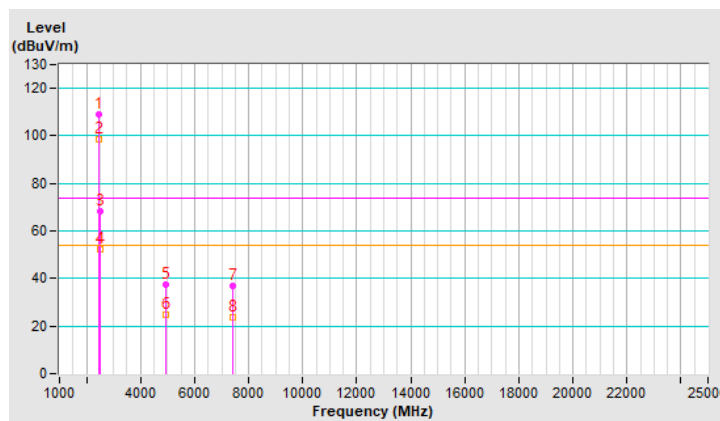


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.6 PK	74.0	-17.4	2.34 H	356	60.0	-3.4
2	2390.00	42.1 AV	54.0	-11.9	2.34 H	356	45.5	-3.4
3	*2412.00	106.9 PK			2.34 H	356	110.3	-3.4
4	*2412.00	95.4 AV			2.34 H	356	98.8	-3.4
5	4824.00	34.6 PK	74.0	-39.4	2.42 H	245	33.3	1.3
6	4824.00	25.5 AV	54.0	-28.5	2.42 H	245	24.2	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

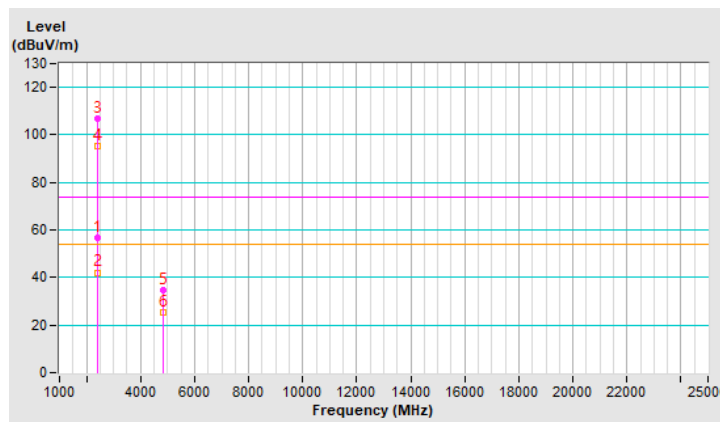


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.9 PK	74.0	-8.1	1.44 V	153	69.3	-3.4
2	2390.00	52.4 AV	54.0	-1.6	1.44 V	153	55.8	-3.4
3	*2412.00	117.9 PK			1.44 V	153	121.3	-3.4
4	*2412.00	106.4 AV			1.44 V	153	109.8	-3.4
5	4824.00	43.8 PK	74.0	-30.2	1.21 V	113	42.5	1.3
6	4824.00	29.0 AV	54.0	-25.0	1.21 V	113	27.7	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

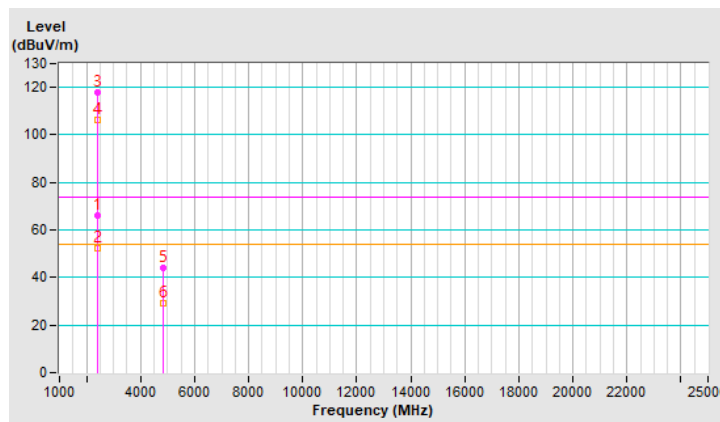


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.9 PK	74.0	-21.1	2.38 H	346	56.3	-3.4
2	2390.00	41.0 AV	54.0	-13.0	2.38 H	346	44.4	-3.4
3	*2437.00	111.1 PK			2.38 H	346	114.5	-3.4
4	*2437.00	98.9 AV			2.38 H	346	102.3	-3.4
5	2483.50	53.8 PK	74.0	-20.2	2.38 H	346	57.2	-3.4
6	2483.50	41.6 AV	54.0	-12.4	2.38 H	346	45.0	-3.4
7	4874.00	37.6 PK	74.0	-36.4	2.43 H	258	36.3	1.3
8	4874.00	29.0 AV	54.0	-25.0	2.43 H	258	27.7	1.3
9	7311.00	36.8 PK	74.0	-37.2	2.46 H	259	29.8	7.0
10	7311.00	28.0 AV	54.0	-26.0	2.46 H	259	21.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

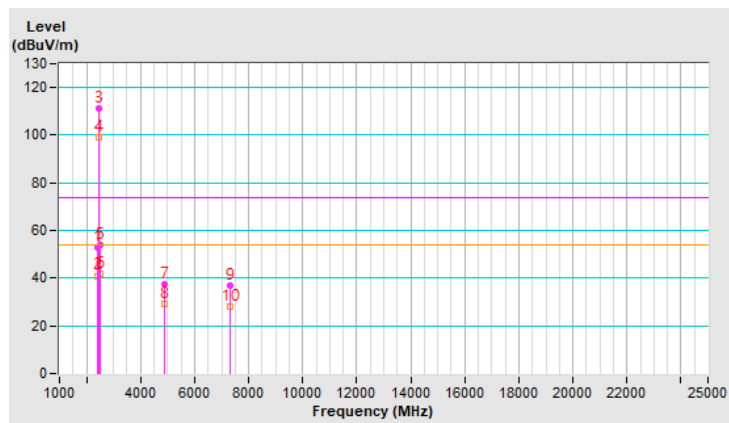


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.6 PK	74.0	-10.4	1.50 V	156	67.0	-3.4
2	2390.00	50.8 AV	54.0	-3.2	1.50 V	156	54.2	-3.4
3	*2437.00	121.5 PK			1.50 V	156	124.9	-3.4
4	*2437.00	109.3 AV			1.50 V	156	112.7	-3.4
5	2483.50	66.0 PK	74.0	-8.0	1.50 V	156	69.4	-3.4
6	2483.50	51.0 AV	54.0	-3.0	1.50 V	156	54.4	-3.4
7	4874.00	48.1 PK	74.0	-25.9	1.23 V	130	46.8	1.3
8	4874.00	33.3 AV	54.0	-20.7	1.23 V	130	32.0	1.3
9	7311.00	47.5 PK	74.0	-26.5	1.24 V	110	40.5	7.0
10	7311.00	32.6 AV	54.0	-21.4	1.24 V	110	25.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

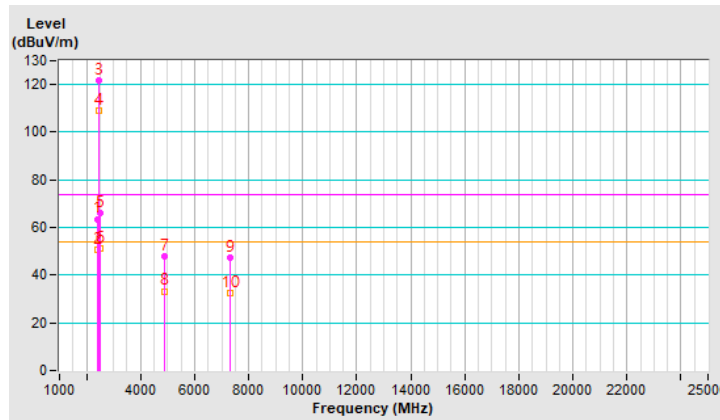


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.8 PK			2.45 H	353	111.2	-3.4
2	*2462.00	95.8 AV			2.45 H	353	99.2	-3.4
3	2483.50	51.4 PK	74.0	-22.6	2.45 H	353	54.8	-3.4
4	2483.50	40.9 AV	54.0	-13.1	2.45 H	353	44.3	-3.4
5	4924.00	34.3 PK	74.0	-39.7	2.48 H	223	33.1	1.2
6	4924.00	27.5 AV	54.0	-26.5	2.48 H	223	26.3	1.2
7	7386.00	32.9 PK	74.0	-41.1	2.35 H	244	25.9	7.0
8	7386.00	24.9 AV	54.0	-29.1	2.35 H	244	17.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

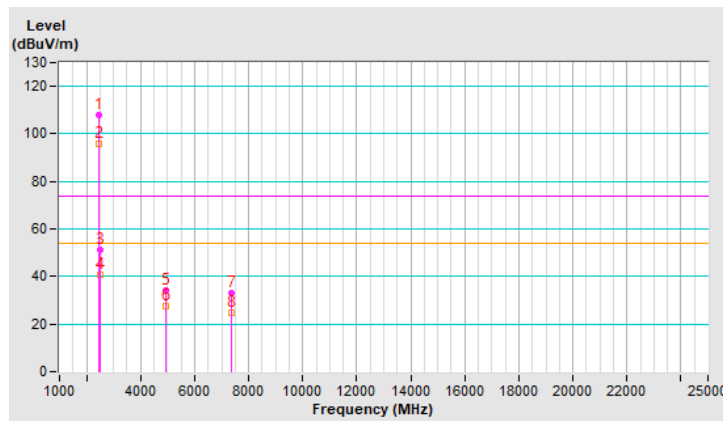

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.1 PK			1.52 V	163	116.5	-3.4
2	*2462.00	102.5 AV			1.52 V	163	105.9	-3.4
3	2483.50	68.9 PK	74.0	-5.1	1.52 V	163	72.3	-3.4
4	2483.50	52.4 AV	54.0	-1.6	1.52 V	163	55.8	-3.4
5	4924.00	45.0 PK	74.0	-29.0	1.27 V	139	43.8	1.2
6	4924.00	29.8 AV	54.0	-24.2	1.27 V	139	28.6	1.2
7	7386.00	43.0 PK	74.0	-31.0	1.25 V	127	36.0	7.0
8	7386.00	27.9 AV	54.0	-26.1	1.25 V	127	20.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

