


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	105.0 PK			2.31 H	323	108.4	-3.4
2	*2467.00	95.0 AV			2.31 H	323	98.4	-3.4
3	2483.50	57.8 PK	74.0	-16.2	2.31 H	323	61.2	-3.4
4	2483.50	42.3 AV	54.0	-11.7	2.31 H	323	45.7	-3.4
5	4934.00	33.9 PK	74.0	-40.1	2.44 H	268	32.7	1.2
6	4934.00	24.6 AV	54.0	-29.4	2.44 H	268	23.4	1.2
7	7401.00	33.5 PK	74.0	-40.5	2.53 H	270	26.5	7.0
8	7401.00	24.6 AV	54.0	-29.4	2.53 H	270	17.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

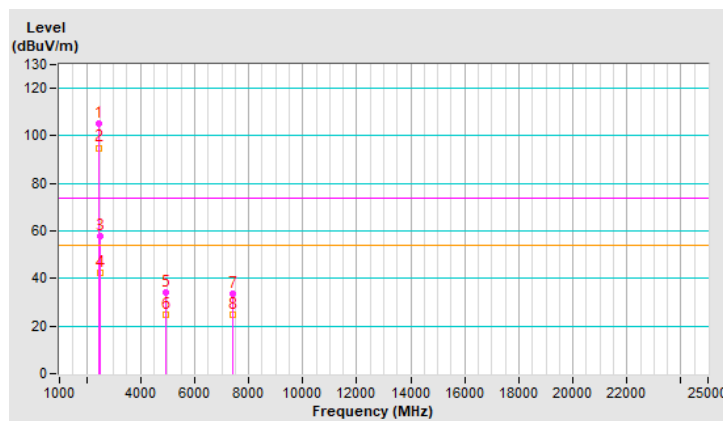


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	115.8 PK			1.53 V	141	119.2	-3.4
2	*2467.00	103.7 AV			1.53 V	141	107.1	-3.4
3	2483.50	70.6 PK	74.0	-3.4	1.53 V	141	74.0	-3.4
4	2483.50	52.4 AV	54.0	-1.6	1.53 V	141	55.8	-3.4
5	4934.00	43.9 PK	74.0	-30.1	1.16 V	131	42.7	1.2
6	4934.00	28.7 AV	54.0	-25.3	1.16 V	131	27.5	1.2
7	7401.00	43.7 PK	74.0	-30.3	1.16 V	130	36.7	7.0
8	7401.00	28.7 AV	54.0	-25.3	1.16 V	130	21.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

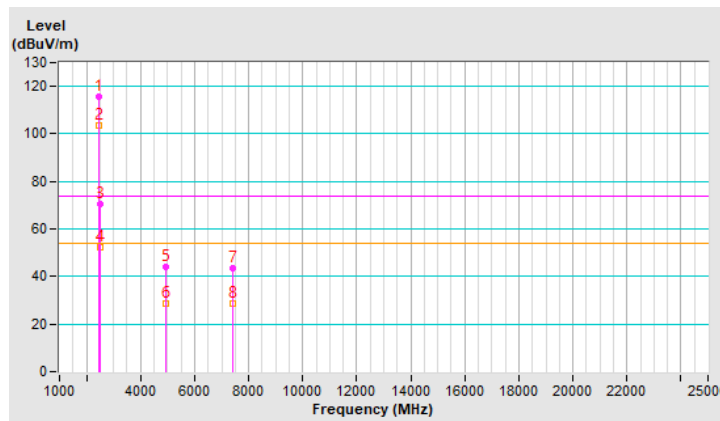


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	100.3 PK			2.43 H	333	103.7	-3.4
2	*2472.00	87.2 AV			2.43 H	333	90.6	-3.4
3	2483.50	52.7 PK	74.0	-21.3	2.43 H	333	56.1	-3.4
4	2483.50	41.6 AV	54.0	-12.4	2.43 H	333	45.0	-3.4
5	4944.00	34.7 PK	74.0	-39.3	2.22 H	281	33.5	1.2
6	4944.00	25.5 AV	54.0	-28.5	2.22 H	281	24.3	1.2
7	7416.00	33.9 PK	74.0	-40.1	2.38 H	220	26.7	7.2
8	7416.00	24.1 AV	54.0	-29.9	2.38 H	220	16.9	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

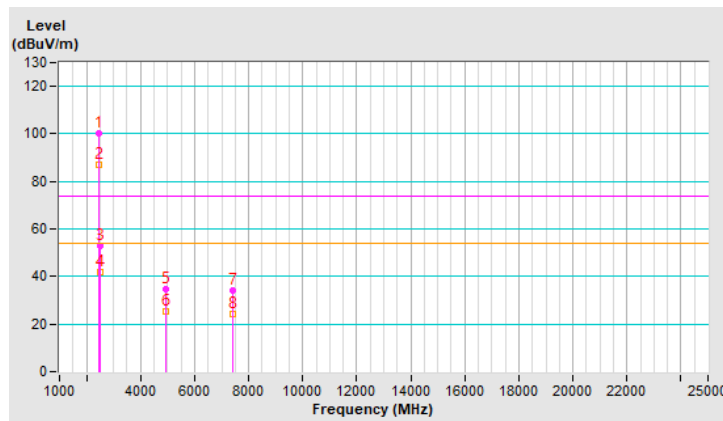


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.5 PK			1.59 V	155	112.9	-3.4
2	*2472.00	96.4 AV			1.59 V	155	99.8	-3.4
3	2483.50	67.5 PK	74.0	-6.5	1.59 V	155	70.9	-3.4
4	2483.50	52.3 AV	54.0	-1.7	1.59 V	155	55.7	-3.4
5	4944.00	37.0 PK	74.0	-37.0	1.23 V	123	35.8	1.2
6	4944.00	24.1 AV	54.0	-29.9	1.23 V	123	22.9	1.2
7	7416.00	36.3 PK	74.0	-37.7	1.22 V	138	29.1	7.2
8	7416.00	23.1 AV	54.0	-30.9	1.22 V	138	15.9	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

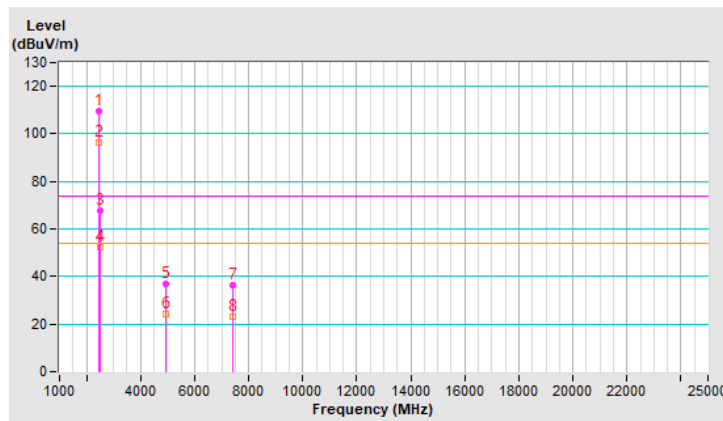


Mode B

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.7 PK	74.0	-15.3	3.36 H	274	62.1	-3.4
2	2390.00	52.4 AV	54.0	-1.6	3.36 H	274	55.8	-3.4
3	*2412.00	107.9 PK			3.36 H	263	111.3	-3.4
4	*2412.00	106.1 AV			3.36 H	263	109.5	-3.4
5	4824.00	40.5 PK	74.0	-33.5	3.17 H	291	39.2	1.3
6	4824.00	34.3 AV	54.0	-19.7	3.17 H	291	33.0	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

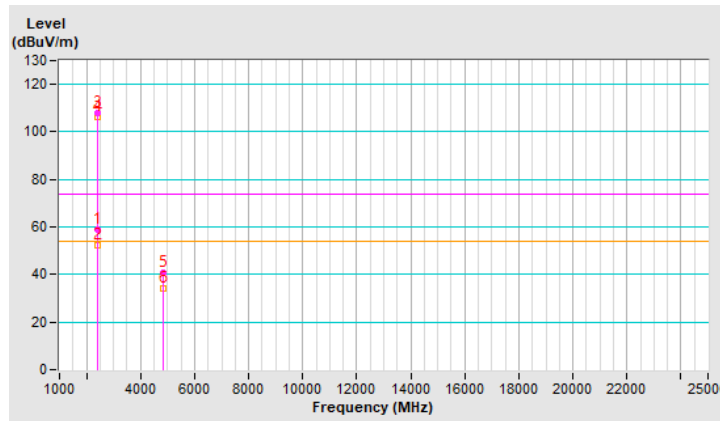


RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.3 PK	74.0	-17.7	2.78 V	31	59.7	-3.4
2	2390.00	45.7 AV	54.0	-8.3	2.78 V	31	49.1	-3.4
3	*2412.00	102.7 PK			2.81 V	34	106.1	-3.4
4	*2412.00	100.7 AV			2.81 V	34	104.1	-3.4
5	4824.00	40.6 PK	74.0	-33.4	3.21 V	299	39.3	1.3
6	4824.00	34.1 AV	54.0	-19.9	3.21 V	299	32.8	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

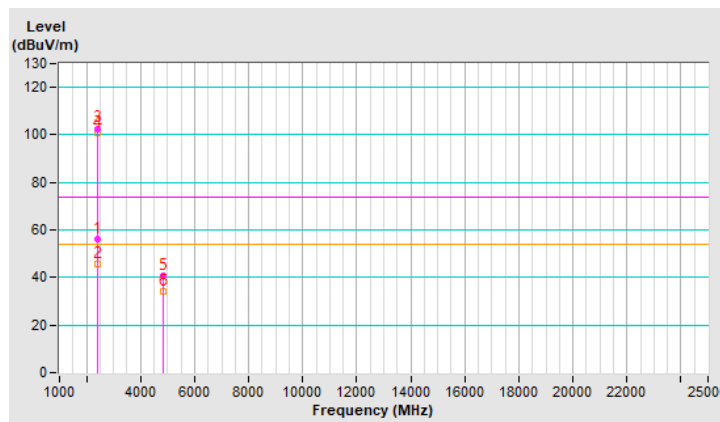


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.4 PK	74.0	-18.6	3.40 H	309	58.8	-3.4
2	2390.00	44.7 AV	54.0	-9.3	3.40 H	309	48.1	-3.4
3	*2437.00	107.0 PK			3.40 H	309	110.4	-3.4
4	*2437.00	105.5 AV			3.40 H	309	108.9	-3.4
5	2483.50	55.9 PK	74.0	-18.1	3.40 H	309	59.3	-3.4
6	2483.50	44.8 AV	54.0	-9.2	3.40 H	309	48.2	-3.4
7	4874.00	41.2 PK	74.0	-32.8	3.16 H	300	39.9	1.3
8	4874.00	33.8 AV	54.0	-20.2	3.16 H	300	32.5	1.3
9	7311.00	46.7 PK	74.0	-27.3	3.72 H	322	39.7	7.0
10	7311.00	37.6 AV	54.0	-16.4	3.72 H	322	30.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

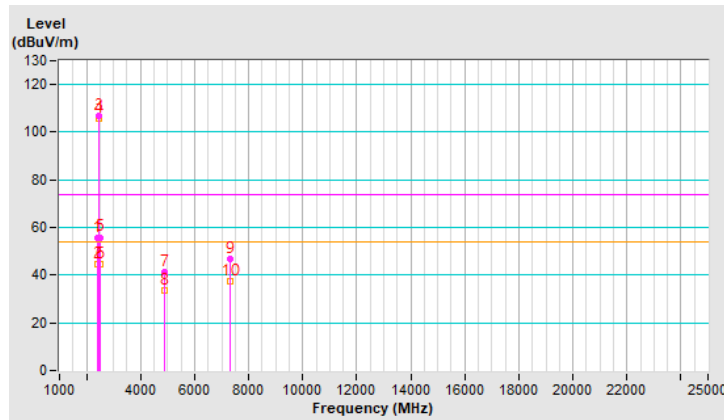


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.9 PK	74.0	-19.1	3.11 V	24	58.3	-3.4
2	2390.00	42.8 AV	54.0	-11.2	3.11 V	24	46.2	-3.4
3	*2437.00	108.2 PK			3.12 V	24	111.6	-3.4
4	*2437.00	105.0 AV			3.12 V	24	108.4	-3.4
5	2483.50	57.5 PK	74.0	-16.5	3.26 V	24	60.9	-3.4
6	2483.50	44.8 AV	54.0	-9.2	3.26 V	24	48.2	-3.4
7	4874.00	40.3 PK	74.0	-33.7	3.20 V	288	39.0	1.3
8	4874.00	34.6 AV	54.0	-19.4	3.20 V	288	33.3	1.3
9	7311.00	46.8 PK	74.0	-27.2	3.67 V	311	39.8	7.0
10	7311.00	38.9 AV	54.0	-15.1	3.67 V	311	31.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

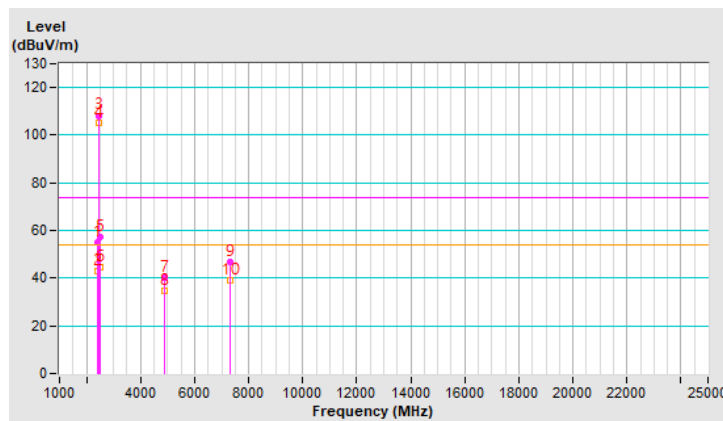


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.1 PK			3.51 H	286	109.5	-3.4
2	*2462.00	104.8 AV			3.51 H	286	108.2	-3.4
3	2483.50	60.1 PK	74.0	-13.9	3.51 H	286	63.5	-3.4
4	2483.50	52.7 AV	54.0	-1.3	3.51 H	286	56.1	-3.4
5	4924.00	39.9 PK	74.0	-34.1	3.07 H	279	38.7	1.2
6	4924.00	32.2 AV	54.0	-21.8	3.07 H	279	31.0	1.2
7	7386.00	45.3 PK	74.0	-28.7	3.37 H	283	38.3	7.0
8	7386.00	37.1 AV	54.0	-16.9	3.37 H	283	30.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

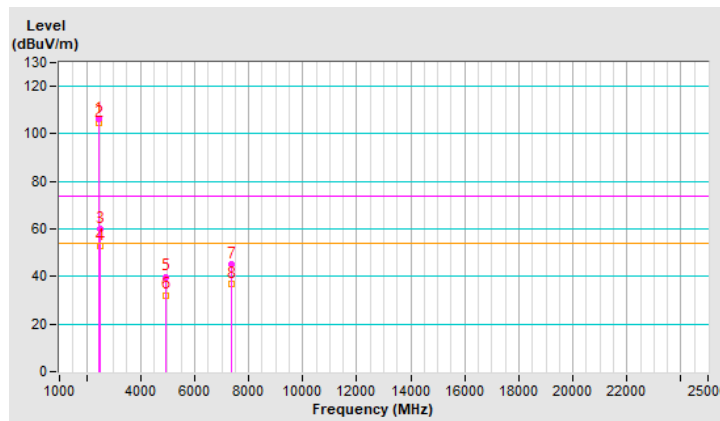


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.7 PK			3.02 V	24	108.1	-3.4
2	*2462.00	102.6 AV			3.02 V	24	106.0	-3.4
3	2483.50	58.5 PK	74.0	-15.5	3.02 V	24	61.9	-3.4
4	2483.50	51.2 AV	54.0	-2.8	3.02 V	24	54.6	-3.4
5	4924.00	40.8 PK	74.0	-33.2	3.20 V	267	39.6	1.2
6	4924.00	33.3 AV	54.0	-20.7	3.20 V	267	32.1	1.2
7	7386.00	46.1 PK	74.0	-27.9	3.38 V	278	39.1	7.0
8	7386.00	37.9 AV	54.0	-16.1	3.38 V	278	30.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

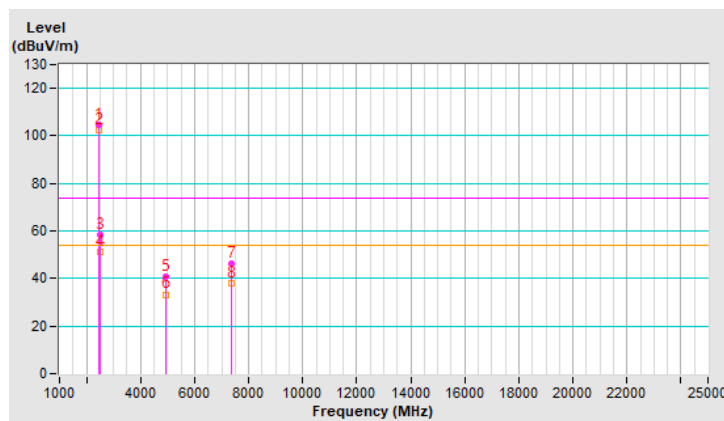


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.3 PK			3.01 H	262	109.7	-3.4
2	*2467.00	104.8 AV			3.01 H	262	108.2	-3.4
3	2483.50	59.0 PK	74.0	-15.0	3.07 H	296	62.4	-3.4
4	2483.50	51.8 AV	54.0	-2.2	3.07 H	296	55.2	-3.4
5	4934.00	39.3 PK	74.0	-34.7	3.13 H	263	38.1	1.2
6	4934.00	32.1 AV	54.0	-21.9	3.13 H	263	30.9	1.2
7	7401.00	47.5 PK	74.0	-26.5	3.40 H	228	40.5	7.0
8	7401.00	39.0 AV	54.0	-15.0	3.40 H	228	32.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

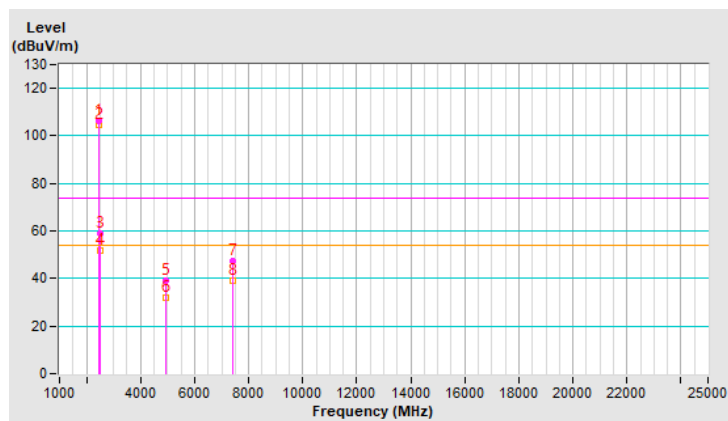


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	97.7 PK			3.45 V	193	101.1	-3.4
2	*2467.00	95.4 AV			3.45 V	193	98.8	-3.4
3	2483.50	58.6 PK	74.0	-15.4	3.48 V	188	62.0	-3.4
4	2483.50	49.7 AV	54.0	-4.3	3.48 V	188	53.1	-3.4
5	4934.00	38.7 PK	74.0	-35.3	3.30 V	312	37.5	1.2
6	4934.00	27.6 AV	54.0	-26.4	3.30 V	312	26.4	1.2
7	7401.00	46.2 PK	74.0	-27.8	3.41 V	259	39.2	7.0
8	7401.00	38.3 AV	54.0	-15.7	3.41 V	259	31.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

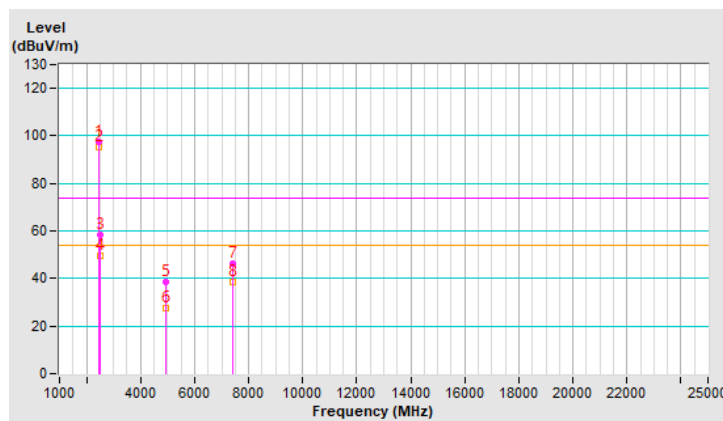


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	97.8 PK			3.33 H	304	101.2	-3.4
2	*2472.00	96.0 AV			3.33 H	304	99.4	-3.4
3	2483.50	59.7 PK	74.0	-14.3	3.31 H	278	63.1	-3.4
4	2483.50	52.0 AV	54.0	-2.0	3.31 H	278	55.4	-3.4
5	4944.00	40.3 PK	74.0	-33.7	3.35 H	273	39.1	1.2
6	4944.00	32.1 AV	54.0	-21.9	3.35 H	273	30.9	1.2
7	7416.00	46.2 PK	74.0	-27.8	3.29 H	270	39.0	7.2
8	7416.00	37.8 AV	54.0	-16.2	3.29 H	270	30.6	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

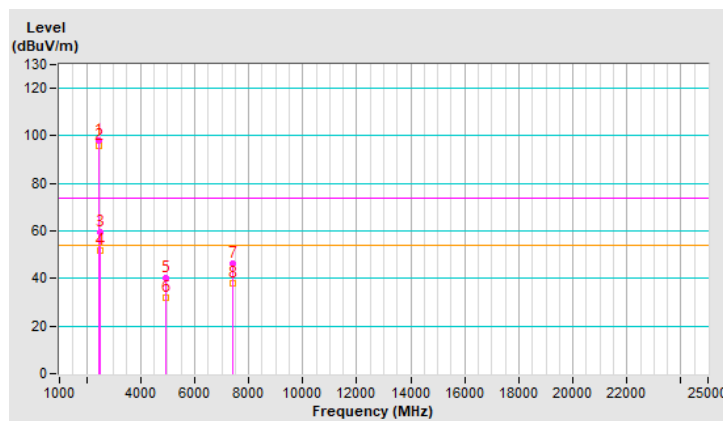


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	97.4 PK			3.49 V	213	100.8	-3.4
2	*2472.00	94.8 AV			3.49 V	213	98.2	-3.4
3	2483.50	58.7 PK	74.0	-15.3	3.45 V	196	62.1	-3.4
4	2483.50	51.8 AV	54.0	-2.2	3.45 V	196	55.2	-3.4
5	4944.00	41.2 PK	74.0	-32.8	3.14 V	271	40.0	1.2
6	4944.00	32.9 AV	54.0	-21.1	3.14 V	271	31.7	1.2
7	7416.00	44.9 PK	74.0	-29.1	3.44 V	234	37.7	7.2
8	7416.00	36.7 AV	54.0	-17.3	3.44 V	234	29.5	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

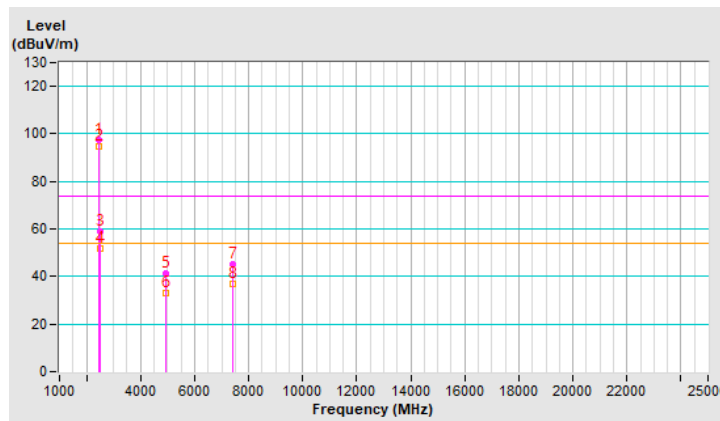


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	3.24 H	282	74.0	-3.4
2	2390.00	51.1 AV	54.0	-2.9	3.24 H	282	54.5	-3.4
3	*2412.00	114.6 PK			3.34 H	247	118.0	-3.4
4	*2412.00	104.4 AV			3.34 H	247	107.8	-3.4
5	4824.00	39.4 PK	74.0	-34.6	3.34 H	279	38.1	1.3
6	4824.00	28.4 AV	54.0	-25.6	3.34 H	279	27.1	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

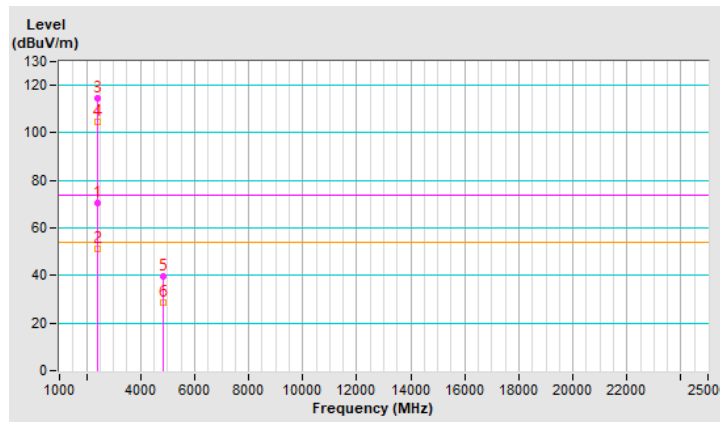


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.6 PK	74.0	-8.4	2.76 V	19	69.0	-3.4
2	2390.00	47.4 AV	54.0	-6.6	2.76 V	19	50.8	-3.4
3	*2412.00	104.5 PK			2.70 V	6	107.9	-3.4
4	*2412.00	95.5 AV			2.70 V	6	98.9	-3.4
5	4824.00	37.5 PK	74.0	-36.5	3.28 V	303	36.2	1.3
6	4824.00	27.3 AV	54.0	-26.7	3.28 V	303	26.0	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

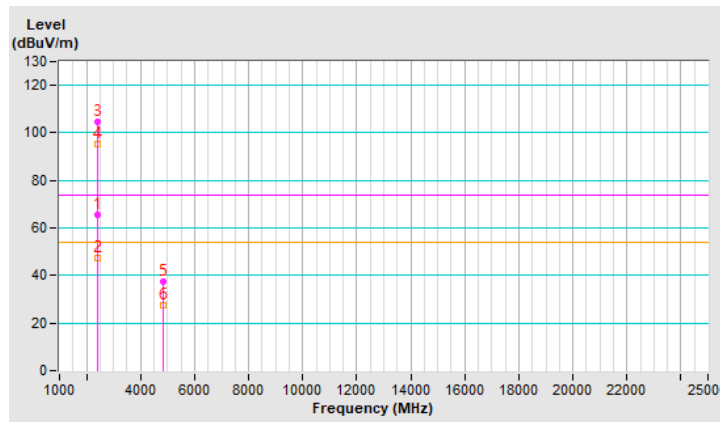


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.0 PK	74.0	-8.0	3.28 H	296	69.4	-3.4
2	2390.00	49.2 AV	54.0	-4.8	3.28 H	296	52.6	-3.4
3	*2437.00	116.1 PK			3.46 H	261	119.5	-3.4
4	*2437.00	106.1 AV			3.46 H	261	109.5	-3.4
5	2483.50	69.0 PK	74.0	-5.0	3.38 H	310	72.4	-3.4
6	2483.50	49.8 AV	54.0	-4.2	3.38 H	310	53.2	-3.4
7	4874.00	41.1 PK	74.0	-32.9	3.14 H	262	39.8	1.3
8	4874.00	30.3 AV	54.0	-23.7	3.14 H	262	29.0	1.3
9	7311.00	42.8 PK	74.0	-31.2	3.29 H	266	35.8	7.0
10	7311.00	33.3 AV	54.0	-20.7	3.29 H	266	26.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

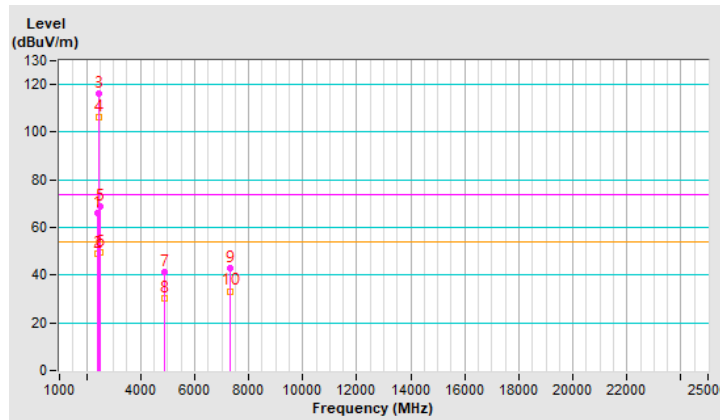


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.7 PK	74.0	-10.3	3.10 V	16	67.1	-3.4
2	2390.00	45.4 AV	54.0	-8.6	3.10 V	16	48.8	-3.4
3	*2437.00	107.0 PK			3.13 V	32	110.4	-3.4
4	*2437.00	98.3 AV			3.13 V	32	101.7	-3.4
5	2483.50	63.2 PK	74.0	-10.8	3.09 V	15	66.6	-3.4
6	2483.50	46.3 AV	54.0	-7.7	3.09 V	15	49.7	-3.4
7	4874.00	39.6 PK	74.0	-34.4	3.29 V	257	38.3	1.3
8	4874.00	30.0 AV	54.0	-24.0	3.29 V	257	28.7	1.3
9	7311.00	43.3 PK	74.0	-30.7	3.67 V	260	36.3	7.0
10	7311.00	33.1 AV	54.0	-20.9	3.67 V	260	26.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

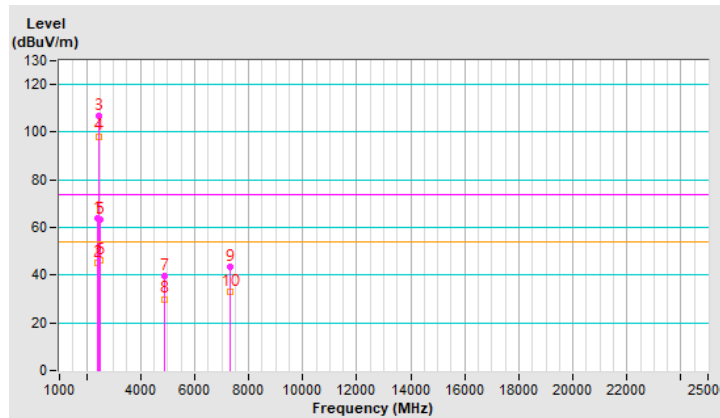


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.6 PK			3.30 H	287	115.0	-3.4
2	*2462.00	101.9 AV			3.30 H	287	105.3	-3.4
3	2483.50	71.2 PK	74.0	-2.8	3.30 H	287	74.6	-3.4
4	2483.50	52.3 AV	54.0	-1.7	3.30 H	287	55.7	-3.4
5	4924.00	40.3 PK	74.0	-33.7	3.11 H	287	39.1	1.2
6	4924.00	30.5 AV	54.0	-23.5	3.11 H	287	29.3	1.2
7	7386.00	44.6 PK	74.0	-29.4	3.24 H	246	37.6	7.0
8	7386.00	34.4 AV	54.0	-19.6	3.24 H	246	27.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

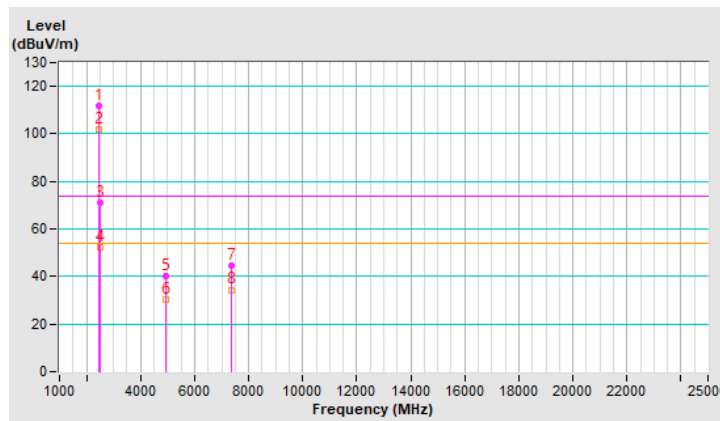


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.6 PK			3.04 V	27	109.0	-3.4
2	*2462.00	96.2 AV			3.04 V	27	99.6	-3.4
3	2483.50	71.7 PK	74.0	-2.3	3.04 V	27	75.1	-3.4
4	2483.50	52.6 AV	54.0	-1.4	3.04 V	27	56.0	-3.4
5	4924.00	39.1 PK	74.0	-34.9	3.18 V	277	37.9	1.2
6	4924.00	30.1 AV	54.0	-23.9	3.18 V	277	28.9	1.2
7	7386.00	44.2 PK	74.0	-29.8	3.59 V	303	37.2	7.0
8	7386.00	34.2 AV	54.0	-19.8	3.59 V	303	27.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

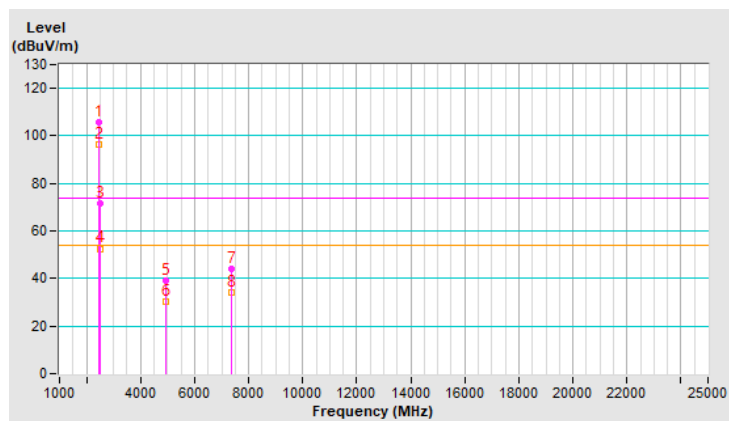


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.4 PK			3.27 H	300	110.8	-3.4
2	*2467.00	97.1 AV			3.27 H	300	100.5	-3.4
3	2483.50	72.7 PK	74.0	-1.3	3.27 H	300	76.1	-3.4
4	2483.50	51.6 AV	54.0	-2.4	3.27 H	300	55.0	-3.4
5	4934.00	39.4 PK	74.0	-34.6	3.04 H	280	38.2	1.2
6	4934.00	29.8 AV	54.0	-24.2	3.04 H	280	28.6	1.2
7	7401.00	43.7 PK	74.0	-30.3	3.25 H	230	36.7	7.0
8	7401.00	33.7 AV	54.0	-20.3	3.25 H	230	26.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

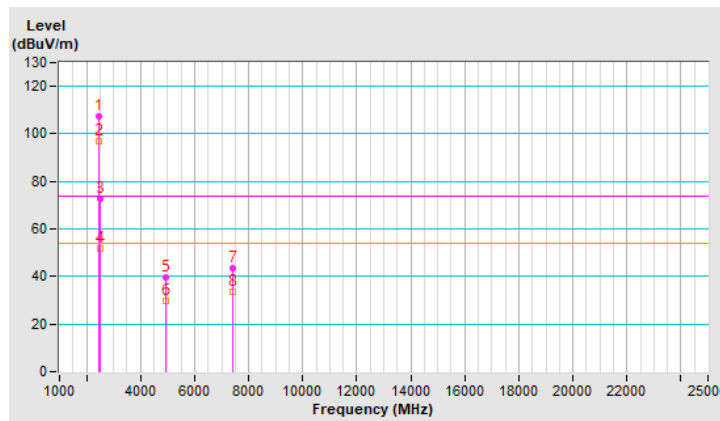


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	99.9 PK			3.06 V	17	103.3	-3.4
2	*2467.00	90.8 AV			3.06 V	17	94.2	-3.4
3	2483.50	68.7 PK	74.0	-5.3	3.06 V	17	72.1	-3.4
4	2483.50	49.2 AV	54.0	-4.8	3.06 V	17	52.6	-3.4
5	4934.00	39.5 PK	74.0	-34.5	3.25 V	267	38.3	1.2
6	4934.00	29.8 AV	54.0	-24.2	3.25 V	267	28.6	1.2
7	7401.00	43.4 PK	74.0	-30.6	3.68 V	273	36.4	7.0
8	7401.00	32.9 AV	54.0	-21.1	3.68 V	273	25.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

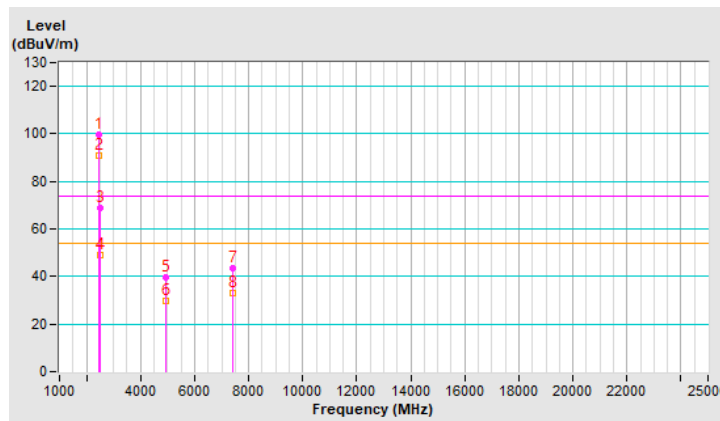


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	93.1 PK			3.23 H	262	96.5	-3.4
2	*2472.00	83.0 AV			3.23 H	262	86.4	-3.4
3	2483.50	71.2 PK	74.0	-2.8	3.23 H	262	74.6	-3.4
4	2483.50	48.8 AV	54.0	-5.2	3.23 H	262	52.2	-3.4
5	4944.00	41.5 PK	74.0	-32.5	3.24 H	234	40.3	1.2
6	4944.00	31.3 AV	54.0	-22.7	3.24 H	234	30.1	1.2
7	7416.00	45.0 PK	74.0	-29.0	3.19 H	244	37.8	7.2
8	7416.00	34.6 AV	54.0	-19.4	3.19 H	244	27.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

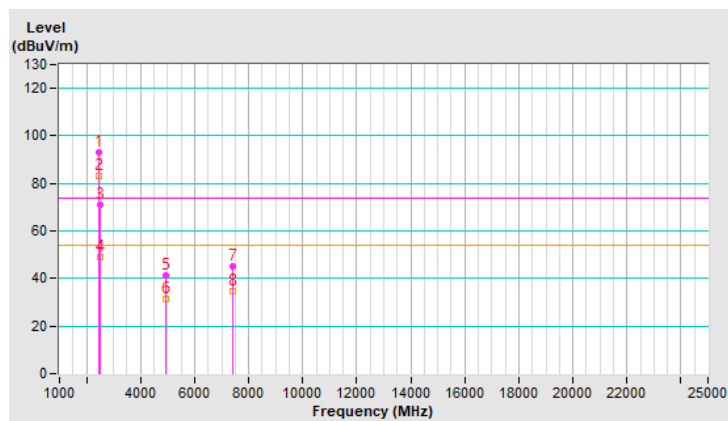


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	89.4 PK			3.80 V	195	92.8	-3.4
2	*2472.00	78.8 AV			3.80 V	195	82.2	-3.4
3	2483.50	64.9 PK	74.0	-9.1	3.80 V	195	68.3	-3.4
4	2483.50	46.1 AV	54.0	-7.9	3.80 V	195	49.5	-3.4
5	4944.00	40.7 PK	74.0	-33.3	3.18 V	276	39.5	1.2
6	4944.00	29.5 AV	54.0	-24.5	3.18 V	276	28.3	1.2
7	7416.00	43.3 PK	74.0	-30.7	3.45 V	321	36.1	7.2
8	7416.00	33.4 AV	54.0	-20.6	3.45 V	321	26.2	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

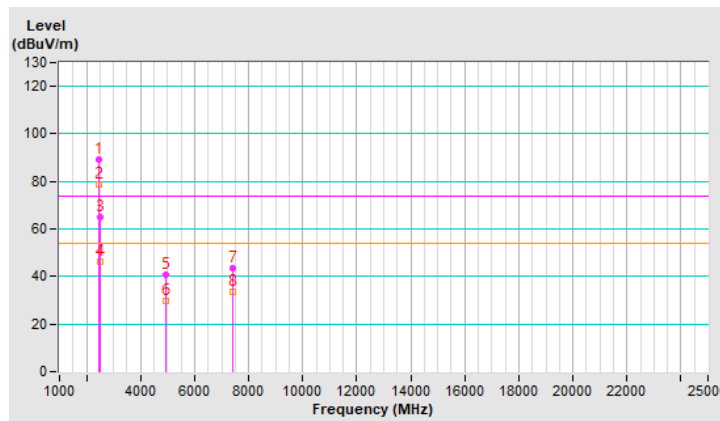


RF Mode	802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.5 PK	74.0	-6.5	3.36 H	264	70.9	-3.4
2	2390.00	52.4 AV	54.0	-1.6	3.36 H	264	55.8	-3.4
3	*2412.00	116.3 PK			3.36 H	264	119.7	-3.4
4	*2412.00	105.0 AV			3.36 H	264	108.4	-3.4
5	4824.00	41.4 PK	74.0	-32.6	3.45 H	262	40.1	1.3
6	4824.00	31.7 AV	54.0	-22.3	3.45 H	262	30.4	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

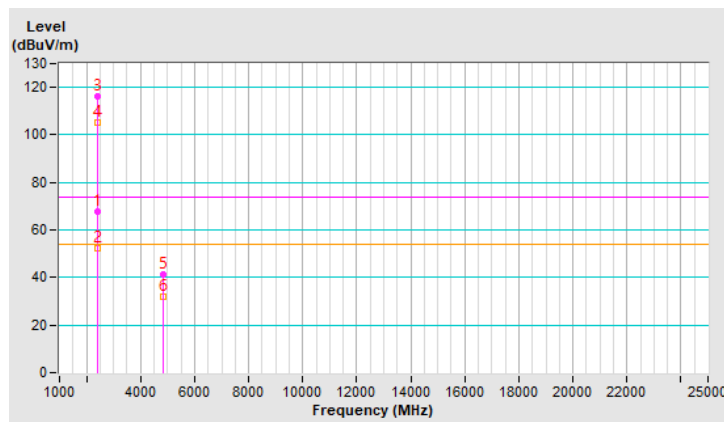


RF Mode	802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.8 PK	74.0	-10.2	2.86 V	24	67.2	-3.4
2	2390.00	45.4 AV	54.0	-8.6	2.86 V	24	48.8	-3.4
3	*2412.00	104.5 PK			2.86 V	24	107.9	-3.4
4	*2412.00	93.1 AV			2.86 V	24	96.5	-3.4
5	4824.00	39.7 PK	74.0	-34.3	3.04 V	267	38.4	1.3
6	4824.00	29.6 AV	54.0	-24.4	3.04 V	267	28.3	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

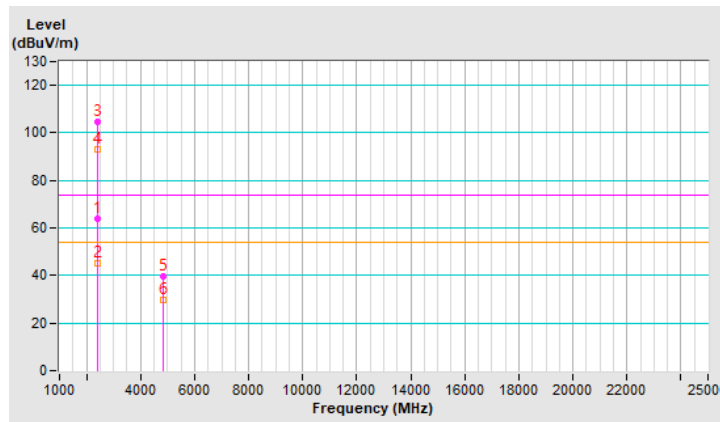


RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	3.29 H	258	68.7	-3.4
2	2390.00	52.4 AV	54.0	-1.6	3.29 H	258	55.8	-3.4
3	*2437.00	111.0 PK			3.29 H	258	114.4	-3.4
4	*2437.00	99.5 AV			3.29 H	258	102.9	-3.4
5	2483.50	64.3 PK	74.0	-9.7	3.29 H	258	67.7	-3.4
6	2483.50	51.6 AV	54.0	-2.4	3.29 H	258	55.0	-3.4
7	4874.00	39.8 PK	74.0	-34.2	3.29 H	248	38.5	1.3
8	4874.00	30.2 AV	54.0	-23.8	3.29 H	248	28.9	1.3
9	7311.00	43.9 PK	74.0	-30.1	3.19 H	277	36.9	7.0
10	7311.00	34.2 AV	54.0	-19.8	3.19 H	277	27.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

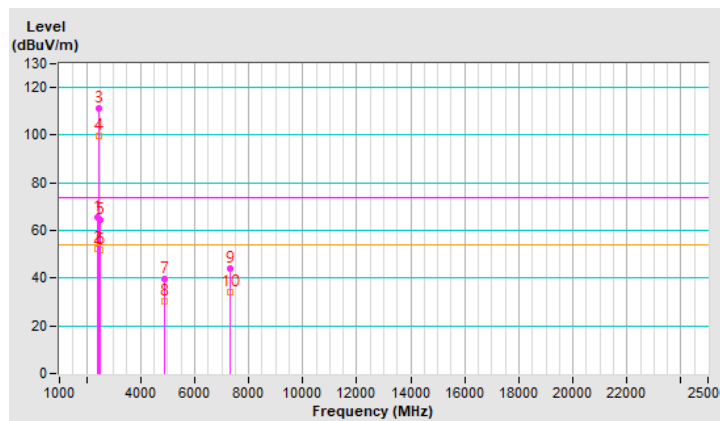


RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.2 PK	74.0	-17.8	3.00 V	20	59.6	-3.4
2	2390.00	44.4 AV	54.0	-9.6	3.00 V	20	47.8	-3.4
3	*2437.00	105.6 PK			3.00 V	20	109.0	-3.4
4	*2437.00	103.5 AV			3.00 V	20	106.9	-3.4
5	2483.50	55.4 PK	74.0	-18.6	3.00 V	20	58.8	-3.4
6	2483.50	43.1 AV	54.0	-10.9	3.00 V	20	46.5	-3.4
7	4874.00	40.8 PK	74.0	-33.2	3.21 V	290	39.5	1.3
8	4874.00	34.0 AV	54.0	-20.0	3.21 V	290	32.7	1.3
9	7311.00	48.0 PK	74.0	-26.0	3.44 V	304	41.0	7.0
10	7311.00	40.1 AV	54.0	-13.9	3.44 V	304	33.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

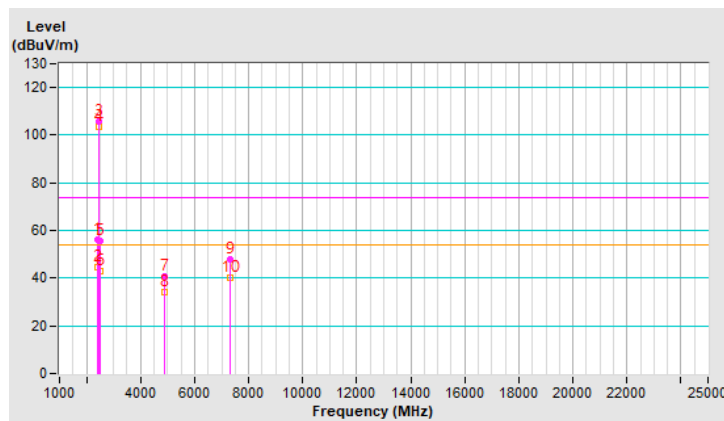


RF Mode	802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.1 PK			3.32 H	276	112.5	-3.4
2	*2462.00	97.0 AV			3.32 H	276	100.4	-3.4
3	2483.50	67.5 PK	74.0	-6.5	3.32 H	276	70.9	-3.4
4	2483.50	51.8 AV	54.0	-2.2	3.32 H	276	55.2	-3.4
5	4924.00	40.0 PK	74.0	-34.0	3.26 H	280	38.8	1.2
6	4924.00	30.1 AV	54.0	-23.9	3.26 H	280	28.9	1.2
7	7386.00	43.5 PK	74.0	-30.5	3.21 H	278	36.5	7.0
8	7386.00	33.9 AV	54.0	-20.1	3.21 H	278	26.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

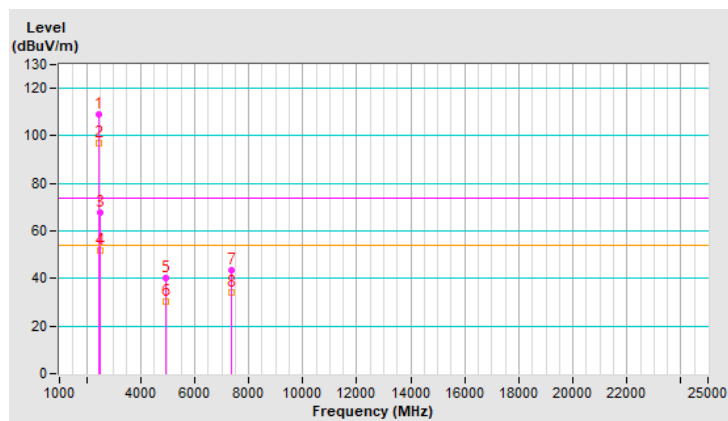


RF Mode	802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.1 PK			3.01 V	35	110.5	-3.4
2	*2462.00	94.9 AV			3.01 V	35	98.3	-3.4
3	2483.50	67.0 PK	74.0	-7.0	3.01 V	35	70.4	-3.4
4	2483.50	51.8 AV	54.0	-2.2	3.01 V	35	55.2	-3.4
5	4924.00	41.0 PK	74.0	-33.0	3.24 V	262	39.8	1.2
6	4924.00	34.2 AV	54.0	-19.8	3.24 V	262	33.0	1.2
7	7386.00	46.3 PK	74.0	-27.7	3.57 V	320	39.3	7.0
8	7386.00	39.0 AV	54.0	-15.0	3.57 V	320	32.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

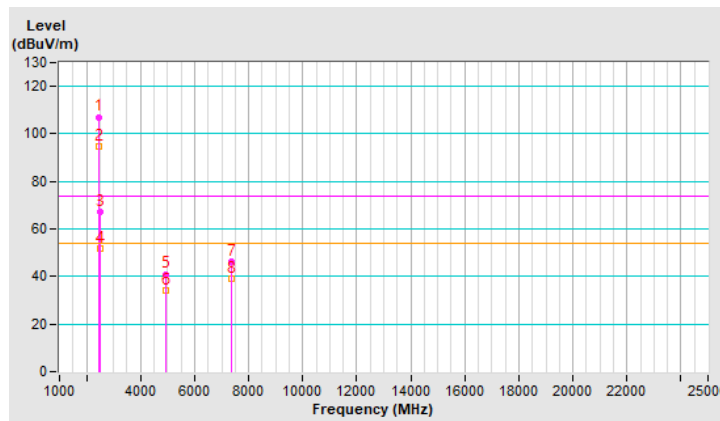


RF Mode	802.11ax (HE20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.8 PK			3.54 H	282	111.2	-3.4
2	*2467.00	96.3 AV			3.54 H	282	99.7	-3.4
3	2483.50	72.1 PK	74.0	-1.9	3.54 H	282	75.5	-3.4
4	2483.50	52.5 AV	54.0	-1.5	3.54 H	282	55.9	-3.4
5	4934.00	41.0 PK	74.0	-33.0	3.24 H	303	39.8	1.2
6	4934.00	30.7 AV	54.0	-23.3	3.24 H	303	29.5	1.2
7	7401.00	44.4 PK	74.0	-29.6	3.12 H	217	37.4	7.0
8	7401.00	34.6 AV	54.0	-19.4	3.12 H	217	27.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

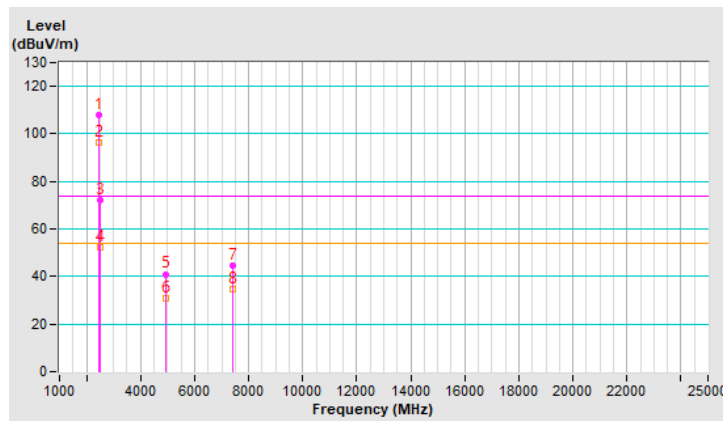


RF Mode	802.11ax (HE20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.2 PK			3.07 V	2	107.6	-3.4
2	*2467.00	92.1 AV			3.07 V	2	95.5	-3.4
3	2483.50	70.5 PK	74.0	-3.5	3.07 V	2	73.9	-3.4
4	2483.50	50.4 AV	54.0	-3.6	3.07 V	2	53.8	-3.4
5	4934.00	41.5 PK	74.0	-32.5	3.18 V	237	40.3	1.2
6	4934.00	35.5 AV	54.0	-18.5	3.18 V	237	34.3	1.2
7	7401.00	47.3 PK	74.0	-26.7	3.67 V	270	40.3	7.0
8	7401.00	39.1 AV	54.0	-14.9	3.67 V	270	32.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

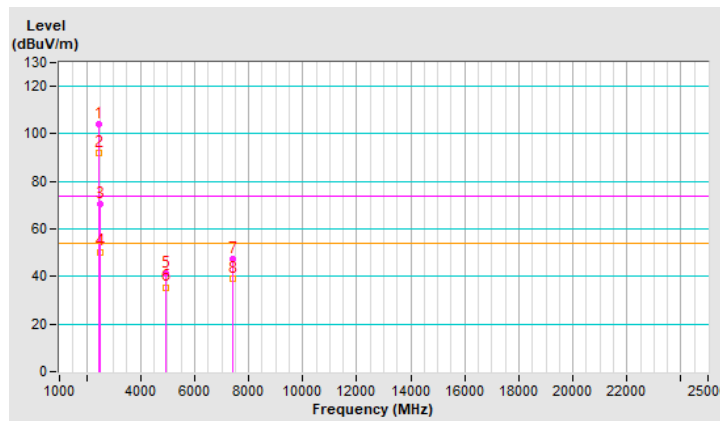


RF Mode	802.11ax (HE20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	92.6 PK			3.20 H	251	96.0	-3.4
2	*2472.00	81.0 AV			3.20 H	251	84.4	-3.4
3	2483.50	70.2 PK	74.0	-3.8	3.20 H	251	73.6	-3.4
4	2483.50	45.9 AV	54.0	-8.1	3.20 H	251	49.3	-3.4
5	4944.00	35.0 PK	74.0	-39.0	3.25 H	221	33.8	1.2
6	4944.00	24.7 AV	54.0	-29.3	3.25 H	221	23.5	1.2
7	7416.00	39.6 PK	74.0	-34.4	3.25 H	304	32.4	7.2
8	7416.00	30.1 AV	54.0	-23.9	3.25 H	304	22.9	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

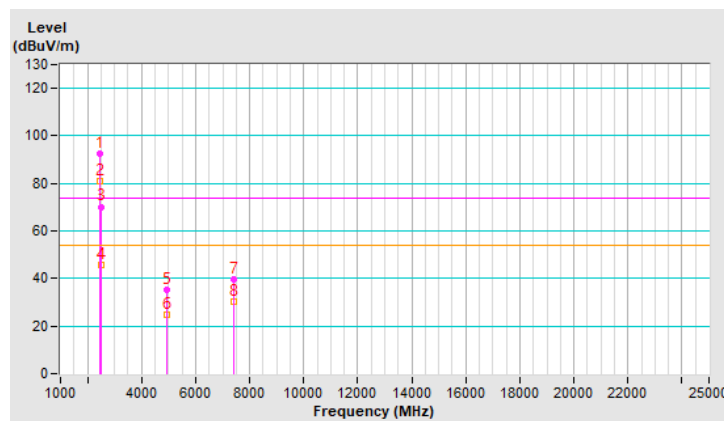


RF Mode	802.11ax (HE20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	84.8 PK			3.02 V	34	88.2	-3.4
2	*2472.00	73.9 AV			3.02 V	34	77.3	-3.4
3	2483.50	64.6 PK	74.0	-9.4	3.02 V	34	68.0	-3.4
4	2483.50	43.8 AV	54.0	-10.2	3.02 V	34	47.2	-3.4
5	4944.00	36.1 PK	74.0	-37.9	3.32 V	247	34.9	1.2
6	4944.00	24.3 AV	54.0	-29.7	3.32 V	247	23.1	1.2
7	7416.00	40.2 PK	74.0	-33.8	3.69 V	315	33.0	7.2
8	7416.00	30.2 AV	54.0	-23.8	3.69 V	315	23.0	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

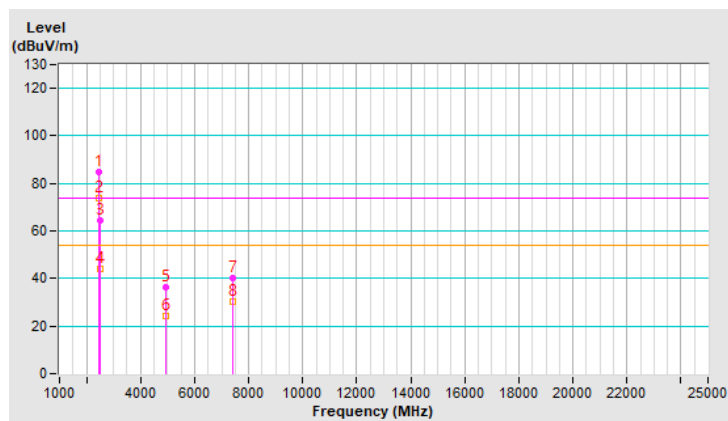


RF Mode	802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.3 PK	74.0	-2.7	3.48 H	279	74.7	-3.4
2	2390.00	49.5 AV	54.0	-4.5	3.48 H	279	52.9	-3.4
3	*2422.00	114.0 PK			3.27 H	270	117.4	-3.4
4	*2422.00	102.5 AV			3.27 H	270	105.9	-3.4
5	4844.00	39.3 PK	74.0	-34.7	3.21 H	257	38.0	1.3
6	4844.00	28.8 AV	54.0	-25.2	3.21 H	257	27.5	1.3
7	7266.00	41.6 PK	74.0	-32.4	3.33 H	330	34.4	7.2
8	7266.00	31.8 AV	54.0	-22.2	3.33 H	330	24.6	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

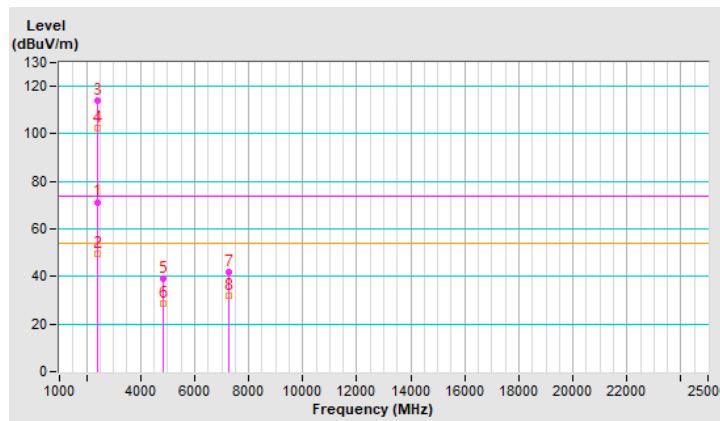


RF Mode	802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	3.10 V	7	68.9	-3.4
2	2390.00	44.0 AV	54.0	-10.0	3.10 V	7	47.4	-3.4
3	*2422.00	98.9 PK			3.21 V	36	102.3	-3.4
4	*2422.00	85.3 AV			3.21 V	36	88.7	-3.4
5	4844.00	38.8 PK	74.0	-35.2	3.24 V	274	37.5	1.3
6	4844.00	28.9 AV	54.0	-25.1	3.24 V	274	27.6	1.3
7	7266.00	41.3 PK	74.0	-32.7	3.45 V	310	34.1	7.2
8	7266.00	31.0 AV	54.0	-23.0	3.45 V	310	23.8	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

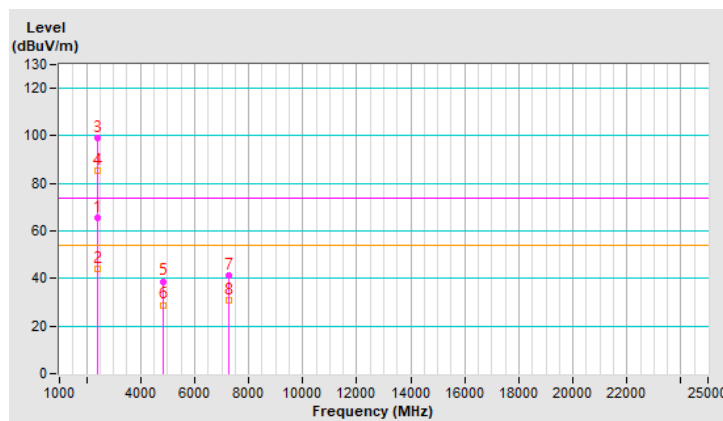


RF Mode	802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.3 PK	74.0	-6.7	3.30 H	287	70.7	-3.4
2	2390.00	51.2 AV	54.0	-2.8	3.30 H	287	54.6	-3.4
3	*2437.00	111.5 PK			3.30 H	287	114.9	-3.4
4	*2437.00	99.8 AV			3.30 H	287	103.2	-3.4
5	2483.50	71.4 PK	74.0	-2.6	3.30 H	287	74.8	-3.4
6	2483.50	51.4 AV	54.0	-2.6	3.30 H	287	54.8	-3.4
7	4874.00	40.8 PK	74.0	-33.2	3.04 H	235	39.5	1.3
8	4874.00	30.3 AV	54.0	-23.7	3.04 H	235	29.0	1.3
9	7311.00	42.0 PK	74.0	-32.0	3.21 H	277	35.0	7.0
10	7311.00	31.4 AV	54.0	-22.6	3.21 H	277	24.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

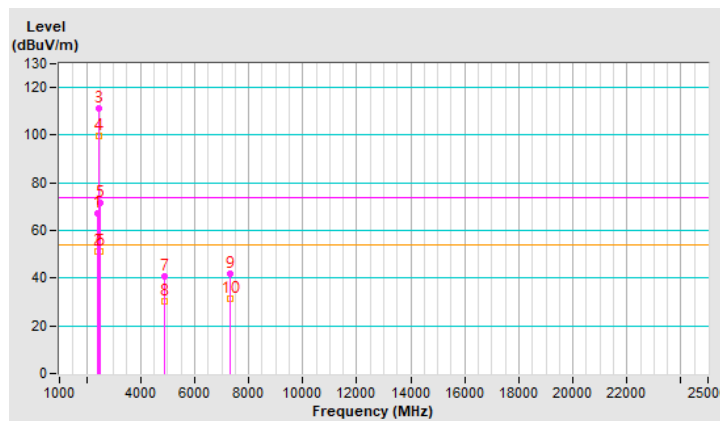


RF Mode	802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.5 PK	74.0	-10.5	3.05 V	31	66.9	-3.4
2	2390.00	47.4 AV	54.0	-6.6	3.05 V	31	50.8	-3.4
3	*2437.00	107.6 PK			3.05 V	31	111.0	-3.4
4	*2437.00	95.9 AV			3.05 V	31	99.3	-3.4
5	2483.50	69.4 PK	74.0	-4.6	3.05 V	31	72.8	-3.4
6	2483.50	48.5 AV	54.0	-5.5	3.05 V	31	51.9	-3.4
7	4874.00	40.6 PK	74.0	-33.4	3.19 V	286	39.3	1.3
8	4874.00	30.8 AV	54.0	-23.2	3.19 V	286	29.5	1.3
9	7311.00	41.7 PK	74.0	-32.3	3.58 V	287	34.7	7.0
10	7311.00	32.6 AV	54.0	-21.4	3.58 V	287	25.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

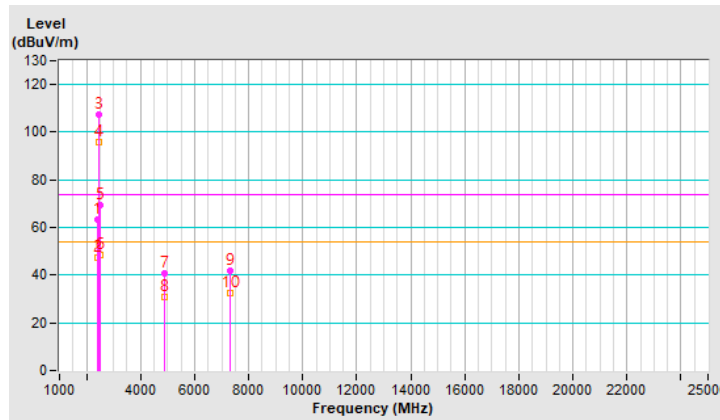


RF Mode	802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	107.9 PK			3.06 H	297	111.2	-3.3
2	*2452.00	96.0 AV			3.06 H	297	99.3	-3.3
3	2483.50	71.6 PK	74.0	-2.4	3.06 H	297	75.0	-3.4
4	2483.50	50.3 AV	54.0	-3.7	3.06 H	297	53.7	-3.4
5	4904.00	39.2 PK	74.0	-34.8	3.31 H	259	38.0	1.2
6	4904.00	29.7 AV	54.0	-24.3	3.31 H	259	28.5	1.2
7	7356.00	43.6 PK	74.0	-30.4	3.19 H	287	36.6	7.0
8	7356.00	34.1 AV	54.0	-19.9	3.19 H	287	27.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

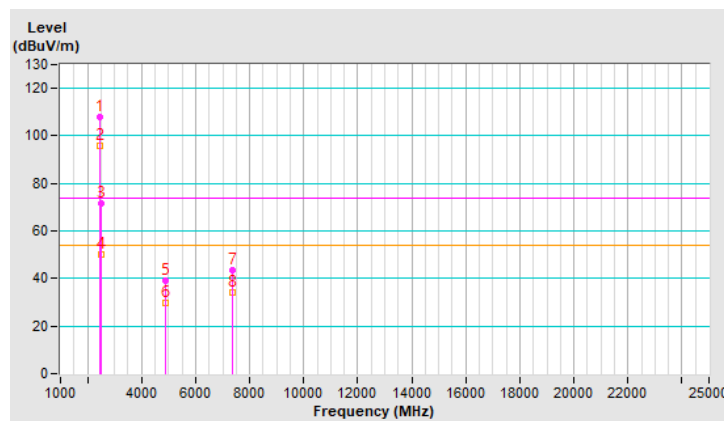


RF Mode	802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	101.8 PK			3.20 V	2	105.1	-3.3
2	*2452.00	88.8 AV			3.20 V	2	92.1	-3.3
3	2483.50	70.7 PK	74.0	-3.3	3.20 V	2	74.1	-3.4
4	2483.50	51.3 AV	54.0	-2.7	3.20 V	2	54.7	-3.4
5	4904.00	40.1 PK	74.0	-33.9	3.14 V	320	38.9	1.2
6	4904.00	30.9 AV	54.0	-23.1	3.14 V	320	29.7	1.2
7	7356.00	42.5 PK	74.0	-31.5	3.58 V	288	35.5	7.0
8	7356.00	33.1 AV	54.0	-20.9	3.58 V	288	26.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

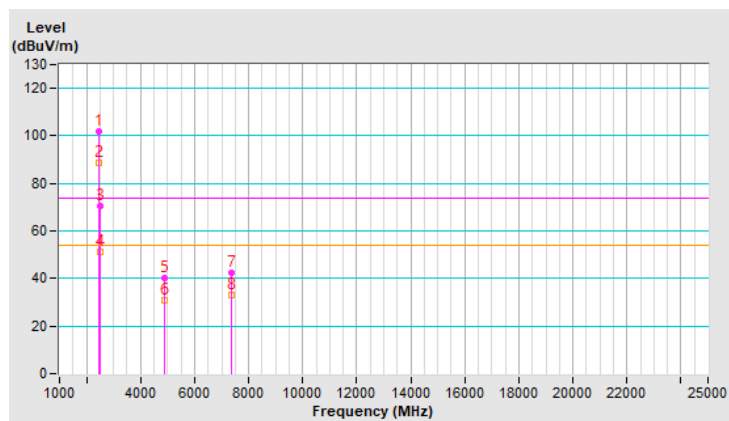


RF Mode	802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	106.2 PK			3.40 H	320	109.6	-3.4
2	*2457.00	93.8 AV			3.40 H	320	97.2	-3.4
3	2483.50	72.3 PK	74.0	-1.7	3.40 H	303	75.7	-3.4
4	2483.50	52.8 AV	54.0	-1.2	3.40 H	303	56.2	-3.4
5	4914.00	40.4 PK	74.0	-33.6	3.26 H	281	39.2	1.2
6	4914.00	30.6 AV	54.0	-23.4	3.26 H	281	29.4	1.2
7	7371.00	41.8 PK	74.0	-32.2	3.19 H	246	34.8	7.0
8	7371.00	32.7 AV	54.0	-21.3	3.19 H	246	25.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

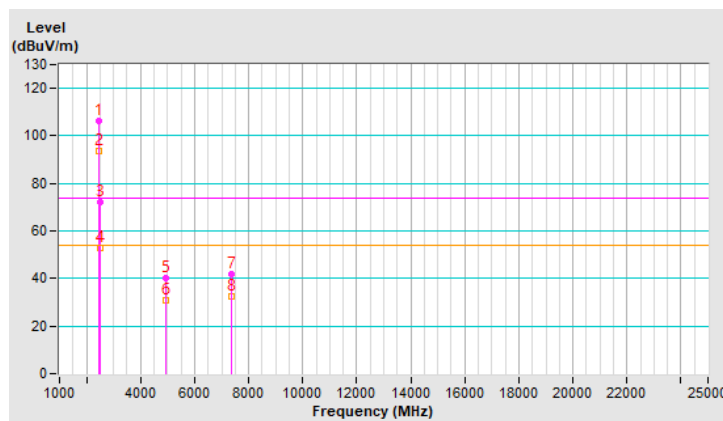


RF Mode	802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	99.4 PK			3.19 V	15	102.8	-3.4
2	*2457.00	86.5 AV			3.19 V	15	89.9	-3.4
3	2483.50	69.7 PK	74.0	-4.3	3.31 V	42	73.1	-3.4
4	2483.50	51.0 AV	54.0	-3.0	3.31 V	42	54.4	-3.4
5	4914.00	40.4 PK	74.0	-33.6	3.14 V	297	39.2	1.2
6	4914.00	30.6 AV	54.0	-23.4	3.14 V	297	29.4	1.2
7	7371.00	43.9 PK	74.0	-30.1	3.47 V	265	36.9	7.0
8	7371.00	33.1 AV	54.0	-20.9	3.47 V	265	26.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

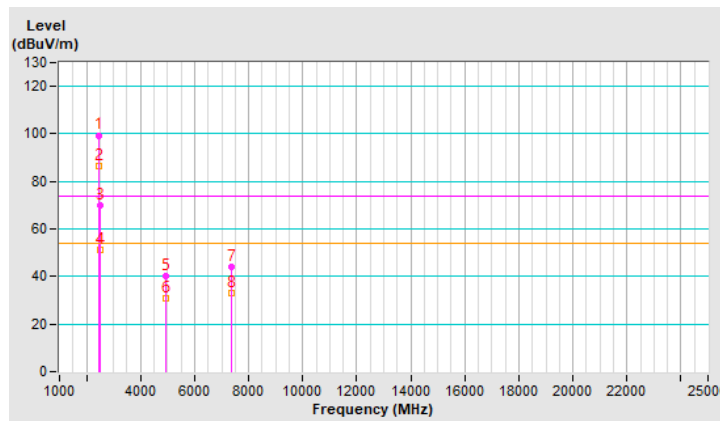


RF Mode	802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	94.7 PK			3.27 H	274	98.1	-3.4
2	*2462.00	82.4 AV			3.27 H	274	85.8	-3.4
3	2483.50	73.5 PK	74.0	-0.5	3.27 H	274	76.9	-3.4
4	2483.50	49.9 AV	54.0	-4.1	3.27 H	274	53.3	-3.4
5	4924.00	41.4 PK	74.0	-32.6	3.23 H	246	40.2	1.2
6	4924.00	31.4 AV	54.0	-22.6	3.23 H	246	30.2	1.2
7	7386.00	44.0 PK	74.0	-30.0	3.09 H	271	37.0	7.0
8	7386.00	34.4 AV	54.0	-19.6	3.09 H	271	27.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

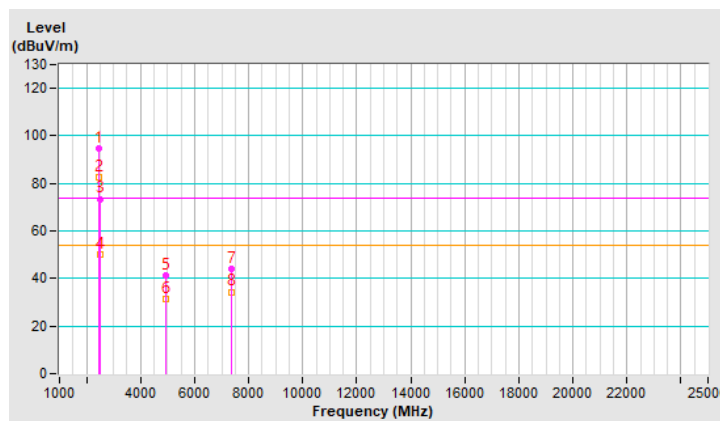


RF Mode	802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	88.6 PK			2.98 V	50	92.0	-3.4
2	*2462.00	76.5 AV			2.98 V	50	79.9	-3.4
3	2483.50	69.8 PK	74.0	-4.2	2.98 V	50	73.2	-3.4
4	2483.50	45.9 AV	54.0	-8.1	2.98 V	50	49.3	-3.4
5	4924.00	39.9 PK	74.0	-34.1	3.09 V	312	38.7	1.2
6	4924.00	30.8 AV	54.0	-23.2	3.09 V	312	29.6	1.2
7	7386.00	41.7 PK	74.0	-32.3	3.78 V	289	34.7	7.0
8	7386.00	32.9 AV	54.0	-21.1	3.78 V	289	25.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

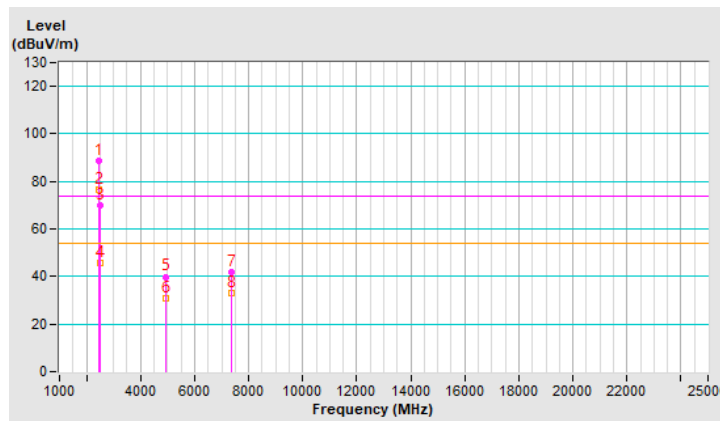


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.8 PK	74.0	-2.2	1.17 H	237	75.2	-3.4
2	2390.00	45.4 AV	54.0	-8.6	1.17 H	237	48.8	-3.4
3	*2412.00	113.4 PK			1.17 H	237	116.8	-3.4
4	*2412.00	104.4 AV			1.17 H	237	107.8	-3.4
5	4824.00	42.4 PK	74.0	-31.6	1.56 H	334	41.1	1.3
6	4824.00	25.4 AV	54.0	-28.6	1.56 H	334	24.1	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

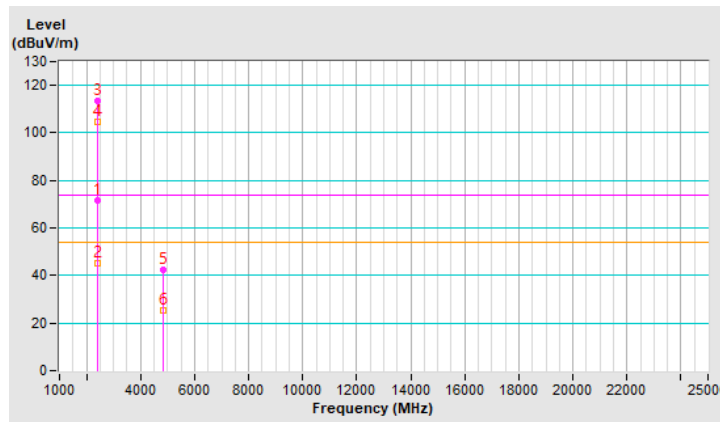


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.0 PK	74.0	-3.0	2.25 V	237	74.4	-3.4
2	2390.00	48.8 AV	54.0	-5.2	2.25 V	237	52.2	-3.4
3	*2412.00	113.3 PK			2.25 V	237	116.7	-3.4
4	*2412.00	104.2 AV			2.25 V	237	107.6	-3.4
5	4824.00	43.7 PK	74.0	-30.3	1.46 V	158	42.4	1.3
6	4824.00	25.6 AV	54.0	-28.4	1.46 V	158	24.3	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

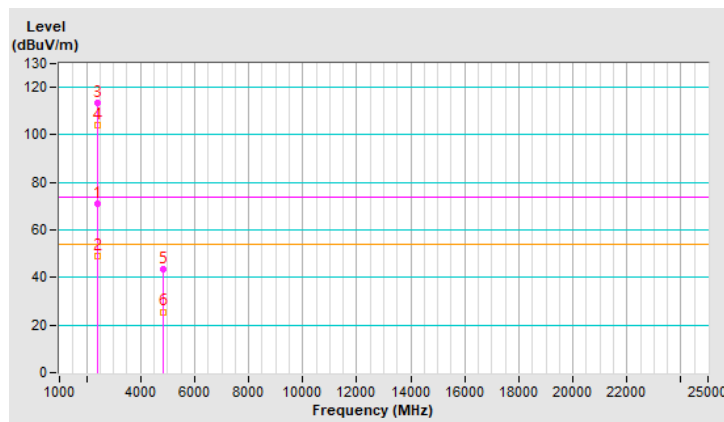


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.9 PK	74.0	-21.1	1.09 H	233	56.3	-3.4
2	2390.00	36.7 AV	54.0	-17.3	1.09 H	233	40.1	-3.4
3	*2437.00	116.7 PK			1.09 H	233	120.1	-3.4
4	*2437.00	106.0 AV			1.09 H	233	109.4	-3.4
5	2483.50	54.2 PK	74.0	-19.8	1.09 H	233	57.6	-3.4
6	2483.50	39.8 AV	54.0	-14.2	1.09 H	233	43.2	-3.4
7	4874.00	45.6 PK	74.0	-28.4	1.58 H	339	44.3	1.3
8	4874.00	28.4 AV	54.0	-25.6	1.58 H	339	27.1	1.3
9	7311.00	46.5 PK	74.0	-27.5	1.70 H	351	39.5	7.0
10	7311.00	36.4 AV	54.0	-17.6	1.70 H	351	29.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

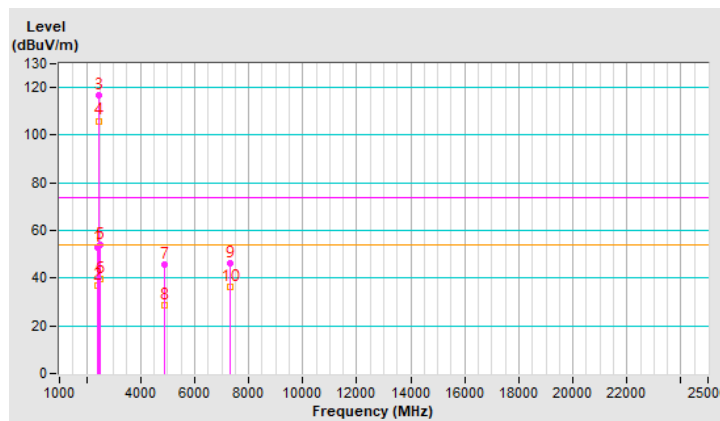


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.2 PK	74.0	-22.8	2.19 V	235	54.6	-3.4
2	2390.00	36.2 AV	54.0	-17.8	2.19 V	235	39.6	-3.4
3	*2437.00	116.8 PK			2.19 V	235	120.2	-3.4
4	*2437.00	106.6 AV			2.19 V	235	110.0	-3.4
5	2483.50	53.7 PK	74.0	-20.3	2.19 V	235	57.1	-3.4
6	2483.50	40.3 AV	54.0	-13.7	2.19 V	235	43.7	-3.4
7	4874.00	46.2 PK	74.0	-27.8	1.51 V	158	44.9	1.3
8	4874.00	29.1 AV	54.0	-24.9	1.51 V	158	27.8	1.3
9	7311.00	47.7 PK	74.0	-26.3	1.54 V	165	40.7	7.0
10	7311.00	37.5 AV	54.0	-16.5	1.54 V	165	30.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

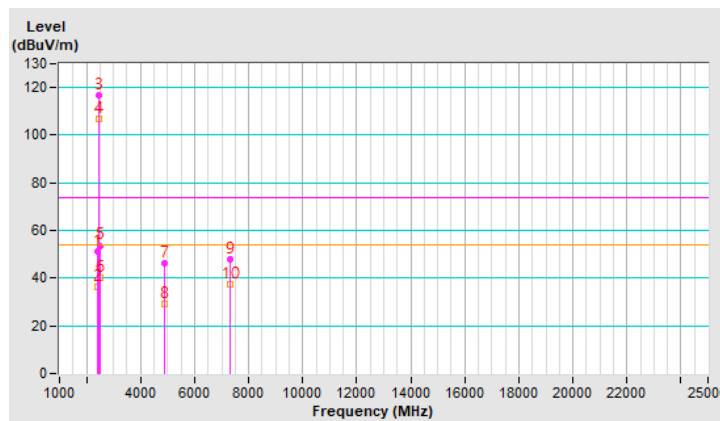


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.5 PK			1.13 H	250	117.9	-3.4
2	*2462.00	104.4 AV			1.13 H	250	107.8	-3.4
3	2483.50	72.4 PK	74.0	-1.6	1.13 H	250	75.8	-3.4
4	2483.50	50.2 AV	54.0	-3.8	1.13 H	250	53.6	-3.4
5	4924.00	42.1 PK	74.0	-31.9	1.62 H	315	40.9	1.2
6	4924.00	25.3 AV	54.0	-28.7	1.62 H	315	24.1	1.2
7	7386.00	43.1 PK	74.0	-30.9	1.66 H	325	36.1	7.0
8	7386.00	33.2 AV	54.0	-20.8	1.66 H	325	26.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

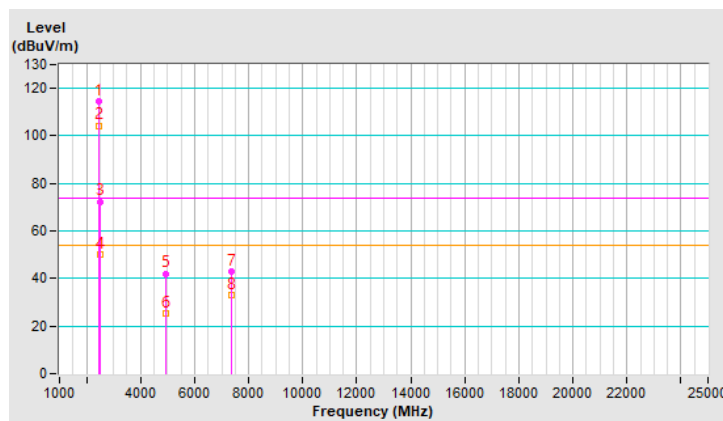


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.4 PK			2.25 V	125	116.8	-3.4
2	*2462.00	103.4 AV			2.25 V	125	106.8	-3.4
3	2483.50	71.1 PK	74.0	-2.9	2.25 V	125	74.5	-3.4
4	2483.50	49.3 AV	54.0	-4.7	2.25 V	125	52.7	-3.4
5	4924.00	43.4 PK	74.0	-30.6	1.55 V	344	42.2	1.2
6	4924.00	26.4 AV	54.0	-27.6	1.55 V	344	25.2	1.2
7	7386.00	44.3 PK	74.0	-29.7	1.54 V	352	37.3	7.0
8	7386.00	33.4 AV	54.0	-20.6	1.54 V	352	26.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

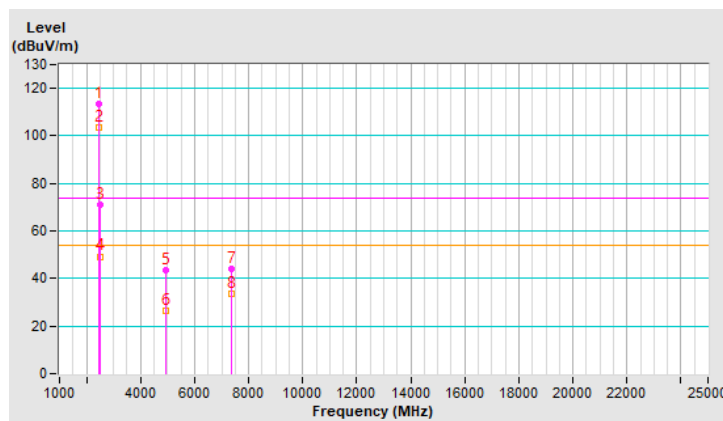


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.5 PK			1.16 H	268	115.9	-3.4
2	*2467.00	102.7 AV			1.16 H	268	106.1	-3.4
3	2483.50	72.4 PK	74.0	-1.6	1.16 H	268	75.8	-3.4
4	2483.50	50.2 AV	54.0	-3.8	1.16 H	268	53.6	-3.4
5	4934.00	42.2 PK	74.0	-31.8	1.65 H	323	41.0	1.2
6	4934.00	24.9 AV	54.0	-29.1	1.65 H	323	23.7	1.2
7	7401.00	42.6 PK	74.0	-31.4	1.71 H	317	35.6	7.0
8	7401.00	32.9 AV	54.0	-21.1	1.71 H	317	25.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

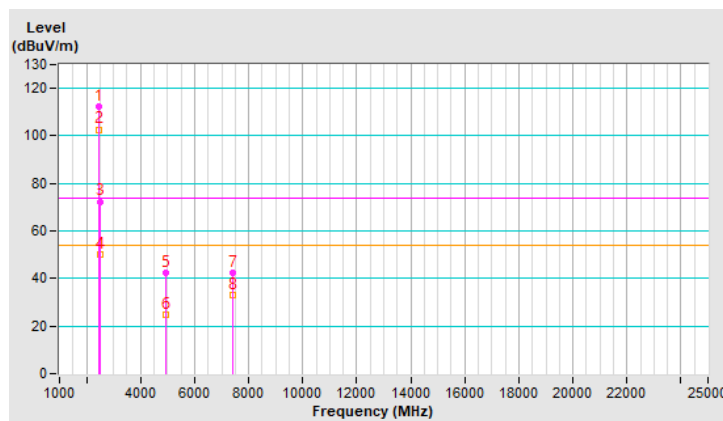


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.7 PK			2.22 V	224	114.1	-3.4
2	*2467.00	102.4 AV			2.22 V	224	105.8	-3.4
3	2483.50	70.8 PK	74.0	-3.2	2.22 V	224	74.2	-3.4
4	2483.50	49.4 AV	54.0	-4.6	2.22 V	224	52.8	-3.4
5	4934.00	43.6 PK	74.0	-30.4	1.61 V	156	42.4	1.2
6	4934.00	26.7 AV	54.0	-27.3	1.61 V	156	25.5	1.2
7	7401.00	44.0 PK	74.0	-30.0	1.50 V	139	37.0	7.0
8	7401.00	34.0 AV	54.0	-20.0	1.50 V	139	27.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

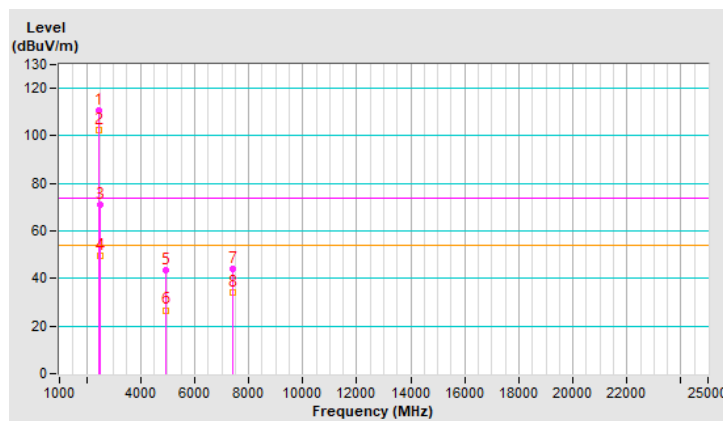


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.3 PK			1.12 H	249	112.7	-3.4
2	*2472.00	99.5 AV			1.12 H	249	102.9	-3.4
3	2483.50	72.1 PK	74.0	-1.9	1.12 H	249	75.5	-3.4
4	2483.50	52.2 AV	54.0	-1.8	1.12 H	249	55.6	-3.4
5	4944.00	40.1 PK	74.0	-33.9	1.66 H	340	38.9	1.2
6	4944.00	25.2 AV	54.0	-28.8	1.66 H	340	24.0	1.2
7	7416.00	41.9 PK	74.0	-32.1	1.60 H	349	34.7	7.2
8	7416.00	31.7 AV	54.0	-22.3	1.60 H	349	24.5	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

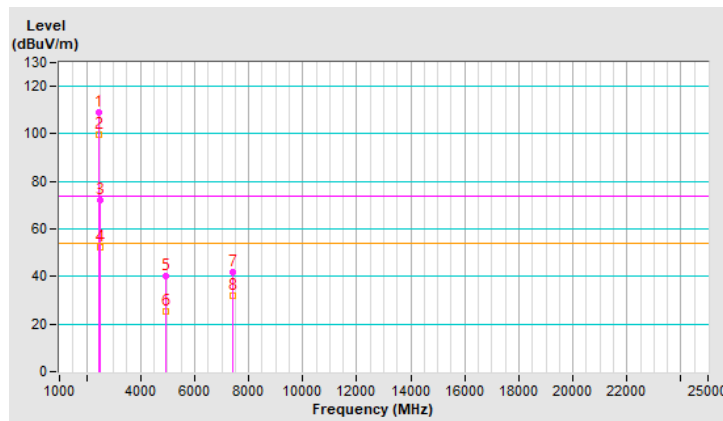


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	108.4 PK			2.53 V	237	111.8	-3.4
2	*2472.00	98.4 AV			2.53 V	237	101.8	-3.4
3	2483.50	69.5 PK	74.0	-4.5	2.53 V	237	72.9	-3.4
4	2483.50	51.0 AV	54.0	-3.0	2.53 V	237	54.4	-3.4
5	4944.00	39.2 PK	74.0	-34.8	1.49 V	143	38.0	1.2
6	4944.00	24.2 AV	54.0	-29.8	1.49 V	143	23.0	1.2
7	7416.00	39.7 PK	74.0	-34.3	1.68 V	157	32.5	7.2
8	7416.00	30.8 AV	54.0	-23.2	1.68 V	157	23.6	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

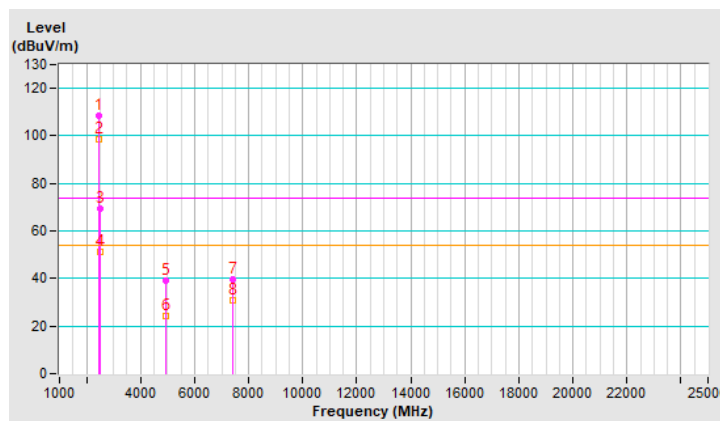


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.9 PK	74.0	-2.1	1.19 H	253	75.3	-3.4
2	2390.00	48.1 AV	54.0	-5.9	1.19 H	253	51.5	-3.4
3	*2412.00	114.1 PK			1.19 H	253	117.5	-3.4
4	*2412.00	103.6 AV			1.19 H	253	107.0	-3.4
5	4824.00	42.2 PK	74.0	-31.8	1.62 H	338	40.9	1.3
6	4824.00	25.8 AV	54.0	-28.2	1.62 H	338	24.5	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

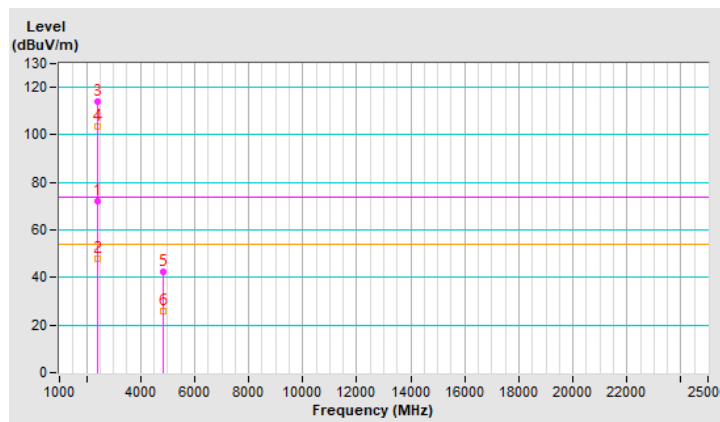


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.7 PK	74.0	-2.3	2.19 V	222	75.1	-3.4
2	2390.00	47.3 AV	54.0	-6.7	2.19 V	222	50.7	-3.4
3	*2412.00	113.7 PK			2.19 V	222	117.1	-3.4
4	*2412.00	103.1 AV			2.19 V	222	106.5	-3.4
5	4824.00	43.2 PK	74.0	-30.8	1.60 V	152	41.9	1.3
6	4824.00	26.2 AV	54.0	-27.8	1.60 V	152	24.9	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

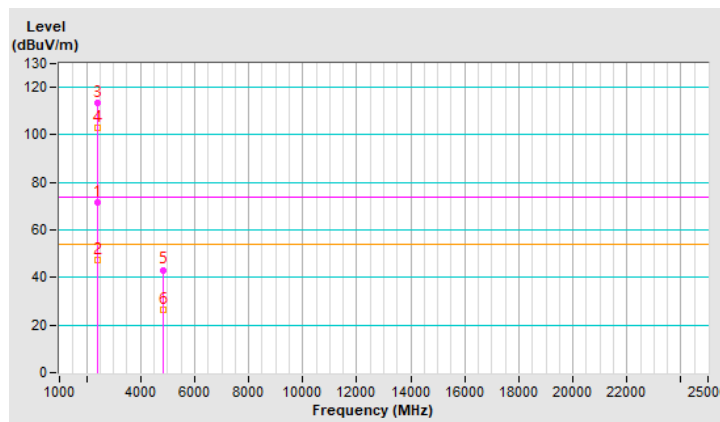


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.2 PK	74.0	-15.8	1.13 H	238	61.6	-3.4
2	2390.00	45.3 AV	54.0	-8.7	1.13 H	238	48.7	-3.4
3	*2437.00	116.9 PK			1.13 H	238	120.3	-3.4
4	*2437.00	106.8 AV			1.13 H	238	110.2	-3.4
5	2483.50	63.8 PK	74.0	-10.2	1.13 H	238	67.2	-3.4
6	2483.50	45.5 AV	54.0	-8.5	1.13 H	238	48.9	-3.4
7	4874.00	45.1 PK	74.0	-28.9	1.59 H	330	43.8	1.3
8	4874.00	28.1 AV	54.0	-25.9	1.59 H	330	26.8	1.3
9	7311.00	47.0 PK	74.0	-27.0	1.68 H	344	40.0	7.0
10	7311.00	37.1 AV	54.0	-16.9	1.68 H	344	30.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

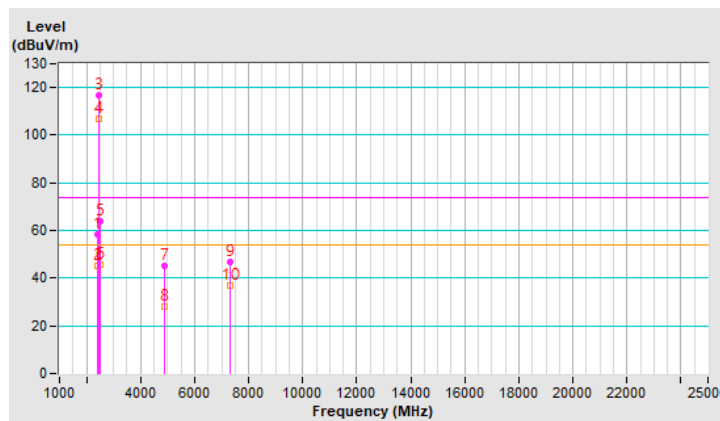


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.4 PK	74.0	-16.6	2.28 V	234	60.8	-3.4
2	2390.00	44.3 AV	54.0	-9.7	2.28 V	234	47.7	-3.4
3	*2437.00	115.7 PK			2.28 V	234	119.1	-3.4
4	*2437.00	105.6 AV			2.28 V	234	109.0	-3.4
5	2483.50	63.0 PK	74.0	-11.0	2.28 V	234	66.4	-3.4
6	2483.50	44.4 AV	54.0	-9.6	2.28 V	234	47.8	-3.4
7	4874.00	46.4 PK	74.0	-27.6	1.49 V	154	45.1	1.3
8	4874.00	29.8 AV	54.0	-24.2	1.49 V	154	28.5	1.3
9	7311.00	47.0 PK	74.0	-27.0	1.52 V	168	40.0	7.0
10	7311.00	37.5 AV	54.0	-16.5	1.52 V	168	30.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

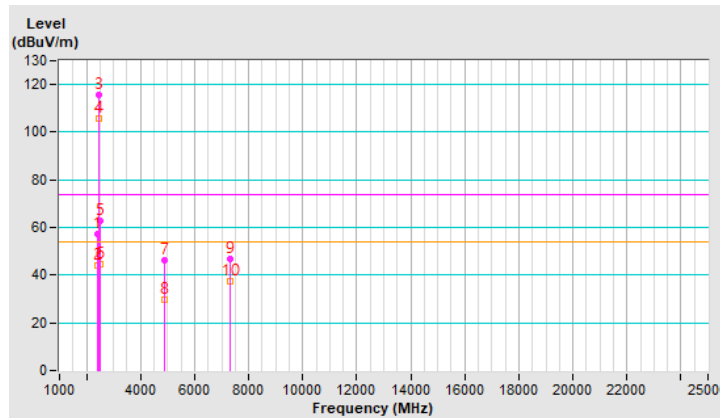


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.5 PK			1.14 H	230	115.9	-3.4
2	*2462.00	102.1 AV			1.14 H	230	105.5	-3.4
3	2483.50	72.1 PK	74.0	-1.9	1.14 H	230	75.5	-3.4
4	2483.50	50.1 AV	54.0	-3.9	1.14 H	230	53.5	-3.4
5	4924.00	41.9 PK	74.0	-32.1	1.65 H	337	40.7	1.2
6	4924.00	26.1 AV	54.0	-27.9	1.65 H	337	24.9	1.2
7	7386.00	43.7 PK	74.0	-30.3	1.64 H	345	36.7	7.0
8	7386.00	33.7 AV	54.0	-20.3	1.64 H	345	26.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

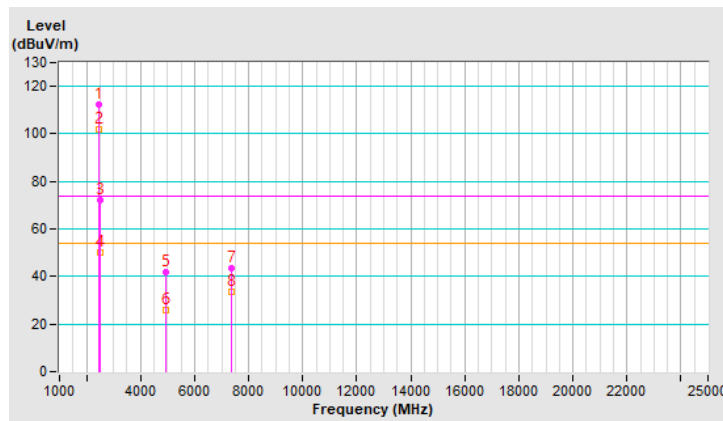

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.1 PK			2.29 V	230	114.5	-3.4
2	*2462.00	101.1 AV			2.29 V	230	104.5	-3.4
3	2483.50	70.7 PK	74.0	-3.3	2.29 V	230	74.1	-3.4
4	2483.50	47.8 AV	54.0	-6.2	2.29 V	230	51.2	-3.4
5	4924.00	42.9 PK	74.0	-31.1	1.51 V	143	41.7	1.2
6	4924.00	27.0 AV	54.0	-27.0	1.51 V	143	25.8	1.2
7	7386.00	44.9 PK	74.0	-29.1	1.55 V	156	37.9	7.0
8	7386.00	34.7 AV	54.0	-19.3	1.55 V	156	27.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

