


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.7 PK			1.14 H	208	116.1	-3.4
2	*2467.00	101.7 AV			1.14 H	208	105.1	-3.4
3	2483.50	72.5 PK	74.0	-1.5	1.14 H	208	75.9	-3.4
4	2483.50	48.4 AV	54.0	-5.6	1.14 H	208	51.8	-3.4
5	4934.00	43.3 PK	74.0	-30.7	1.63 H	358	42.1	1.2
6	4934.00	26.1 AV	54.0	-27.9	1.63 H	358	24.9	1.2
7	7401.00	44.8 PK	74.0	-29.2	1.67 H	340	37.8	7.0
8	7401.00	34.6 AV	54.0	-19.4	1.67 H	340	27.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

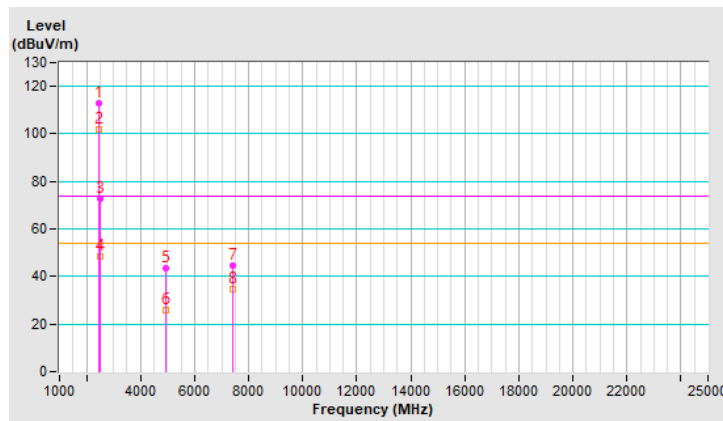


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.9 PK			2.24 V	223	115.3	-3.4
2	*2467.00	101.6 AV			2.24 V	223	105.0	-3.4
3	2483.50	69.4 PK	74.0	-4.6	2.24 V	223	72.8	-3.4
4	2483.50	47.9 AV	54.0	-6.1	2.24 V	223	51.3	-3.4
5	4934.00	44.3 PK	74.0	-29.7	1.50 V	165	43.1	1.2
6	4934.00	27.5 AV	54.0	-26.5	1.50 V	165	26.3	1.2
7	7401.00	45.0 PK	74.0	-29.0	1.48 V	159	38.0	7.0
8	7401.00	35.1 AV	54.0	-18.9	1.48 V	159	28.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

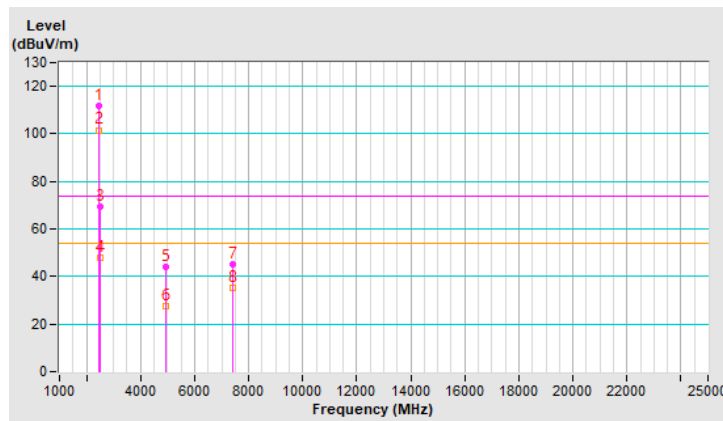


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.1 PK			1.10 H	238	113.5	-3.4
2	*2472.00	99.3 AV			1.10 H	238	102.7	-3.4
3	2483.50	69.6 PK	74.0	-4.4	1.10 H	238	73.0	-3.4
4	2483.50	52.6 AV	54.0	-1.4	1.10 H	238	56.0	-3.4
5	4944.00	39.3 PK	74.0	-34.7	1.56 H	344	38.1	1.2
6	4944.00	23.3 AV	54.0	-30.7	1.56 H	344	22.1	1.2
7	7416.00	41.8 PK	74.0	-32.2	1.61 H	322	34.6	7.2
8	7416.00	30.8 AV	54.0	-23.2	1.61 H	322	23.6	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

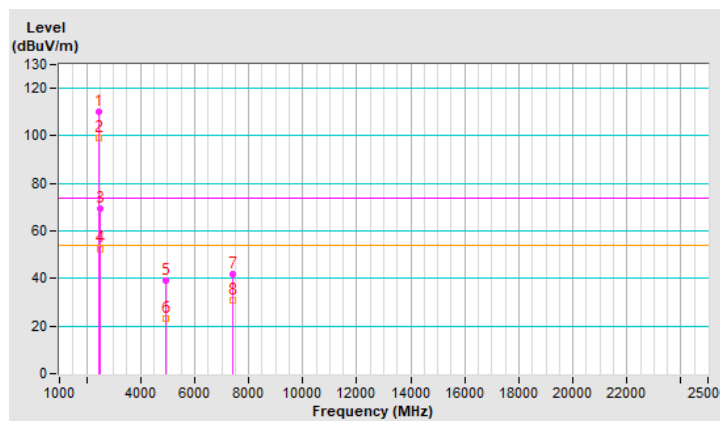


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.4 PK			2.22 V	209	110.8	-3.4
2	*2472.00	97.7 AV			2.22 V	209	101.1	-3.4
3	2483.50	68.2 PK	74.0	-5.8	2.22 V	209	71.6	-3.4
4	2483.50	51.6 AV	54.0	-2.4	2.22 V	209	55.0	-3.4
5	4944.00	40.5 PK	74.0	-33.5	1.67 V	179	39.3	1.2
6	4944.00	24.2 AV	54.0	-29.8	1.67 V	179	23.0	1.2
7	7416.00	42.2 PK	74.0	-31.8	1.56 V	153	35.0	7.2
8	7416.00	31.4 AV	54.0	-22.6	1.56 V	153	24.2	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

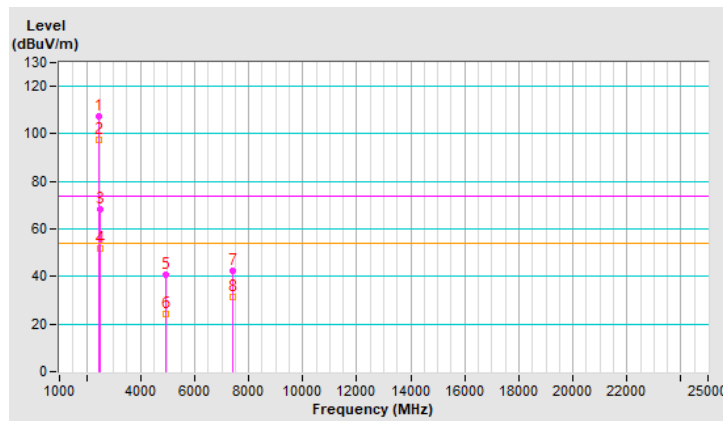


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.0 PK	74.0	-2.0	1.17 H	250	75.4	-3.4
2	2390.00	51.4 AV	54.0	-2.6	1.17 H	250	54.8	-3.4
3	*2412.00	112.6 PK			1.17 H	250	116.0	-3.4
4	*2412.00	100.4 AV			1.17 H	250	103.8	-3.4
5	4824.00	44.9 PK	74.0	-29.1	1.63 H	344	43.6	1.3
6	4824.00	27.5 AV	54.0	-26.5	1.63 H	344	26.2	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

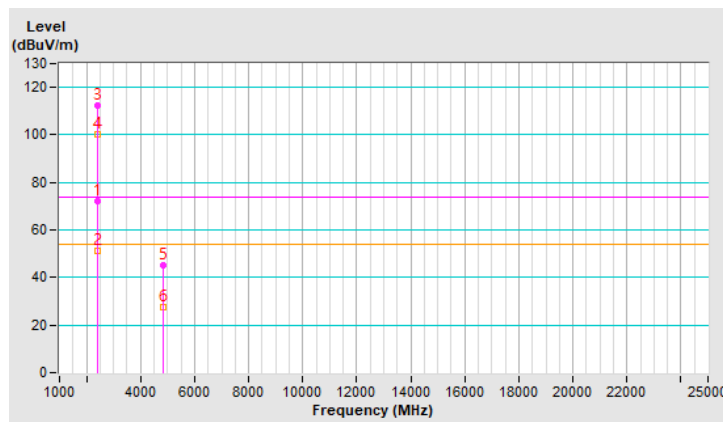


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.8 PK	74.0	-4.2	2.30 V	223	73.2	-3.4
2	2390.00	50.8 AV	54.0	-3.2	2.30 V	223	54.2	-3.4
3	*2412.00	111.1 PK			2.30 V	223	114.5	-3.4
4	*2412.00	99.9 AV			2.30 V	223	103.3	-3.4
5	4824.00	44.9 PK	74.0	-29.1	1.58 V	142	43.6	1.3
6	4824.00	28.3 AV	54.0	-25.7	1.58 V	142	27.0	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

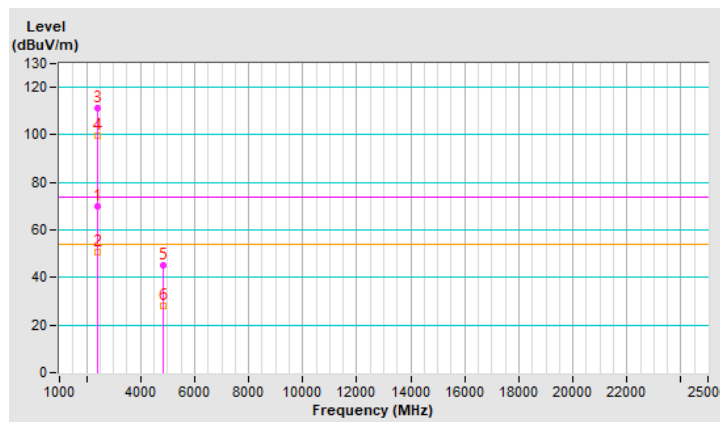


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	1.19 H	249	62.7	-3.4
2	2390.00	44.4 AV	54.0	-9.6	1.19 H	249	47.8	-3.4
3	*2437.00	113.8 PK			1.19 H	249	117.2	-3.4
4	*2437.00	103.5 AV			1.19 H	249	106.9	-3.4
5	2483.50	60.1 PK	74.0	-13.9	1.19 H	249	63.5	-3.4
6	2483.50	43.8 AV	54.0	-10.2	1.19 H	249	47.2	-3.4
7	4874.00	45.3 PK	74.0	-28.7	1.61 H	325	44.0	1.3
8	4874.00	28.4 AV	54.0	-25.6	1.61 H	325	27.1	1.3
9	7311.00	46.8 PK	74.0	-27.2	1.69 H	353	39.8	7.0
10	7311.00	36.6 AV	54.0	-17.4	1.69 H	353	29.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

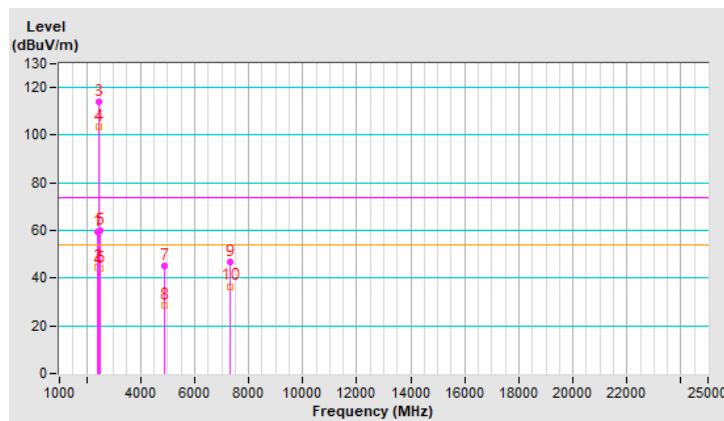


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.3 PK	74.0	-15.7	2.27 V	226	61.7	-3.4
2	2390.00	43.2 AV	54.0	-10.8	2.27 V	226	46.6	-3.4
3	*2437.00	112.1 PK			2.27 V	226	115.5	-3.4
4	*2437.00	102.0 AV			2.27 V	226	105.4	-3.4
5	2483.50	59.6 PK	74.0	-14.4	2.27 V	226	63.0	-3.4
6	2483.50	43.7 AV	54.0	-10.3	2.27 V	226	47.1	-3.4
7	4874.00	47.0 PK	74.0	-27.0	1.51 V	139	45.7	1.3
8	4874.00	29.7 AV	54.0	-24.3	1.51 V	139	28.4	1.3
9	7311.00	47.5 PK	74.0	-26.5	1.58 V	140	40.5	7.0
10	7311.00	37.5 AV	54.0	-16.5	1.58 V	140	30.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

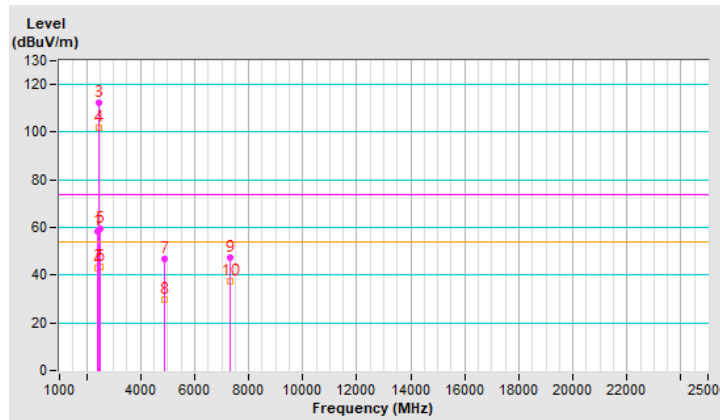


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.9 PK			1.11 H	247	113.3	-3.4
2	*2462.00	99.4 AV			1.11 H	247	102.8	-3.4
3	2483.50	71.9 PK	74.0	-2.1	1.11 H	247	75.3	-3.4
4	2483.50	50.2 AV	54.0	-3.8	1.11 H	247	53.6	-3.4
5	4924.00	42.9 PK	74.0	-31.1	1.69 H	338	41.7	1.2
6	4924.00	25.9 AV	54.0	-28.1	1.69 H	338	24.7	1.2
7	7386.00	44.9 PK	74.0	-29.1	1.64 H	325	37.9	7.0
8	7386.00	34.6 AV	54.0	-19.4	1.64 H	325	27.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

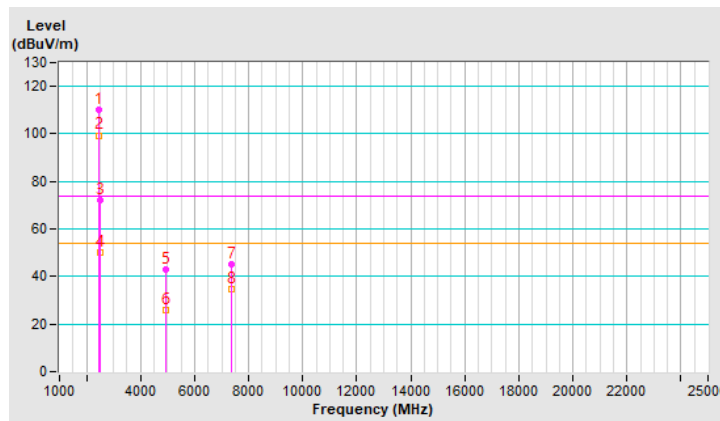


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.7 PK			2.24 V	235	112.1	-3.4
2	*2462.00	98.6 AV			2.24 V	235	102.0	-3.4
3	2483.50	70.6 PK	74.0	-3.4	2.24 V	235	74.0	-3.4
4	2483.50	50.0 AV	54.0	-4.0	2.24 V	235	53.4	-3.4
5	4924.00	43.7 PK	74.0	-30.3	1.57 V	144	42.5	1.2
6	4924.00	26.9 AV	54.0	-27.1	1.57 V	144	25.7	1.2
7	7386.00	46.1 PK	74.0	-27.9	1.59 V	152	39.1	7.0
8	7386.00	35.7 AV	54.0	-18.3	1.59 V	152	28.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

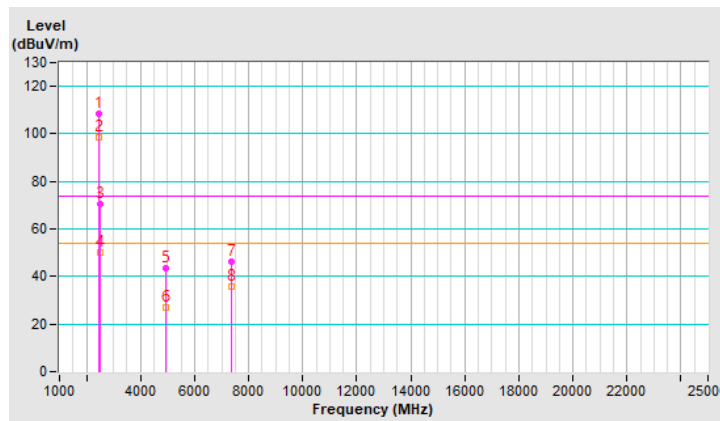


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.2 PK			1.17 H	259	111.6	-3.4
2	*2467.00	98.6 AV			1.17 H	259	102.0	-3.4
3	2483.50	72.3 PK	74.0	-1.7	1.17 H	259	75.7	-3.4
4	2483.50	51.5 AV	54.0	-2.5	1.17 H	259	54.9	-3.4
5	4934.00	43.3 PK	74.0	-30.7	1.62 H	341	42.1	1.2
6	4934.00	26.5 AV	54.0	-27.5	1.62 H	341	25.3	1.2
7	7401.00	44.4 PK	74.0	-29.6	1.63 H	345	37.4	7.0
8	7401.00	34.4 AV	54.0	-19.6	1.63 H	345	27.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

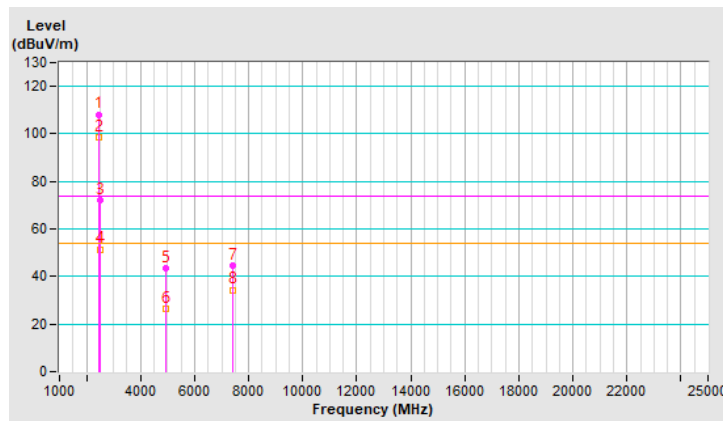


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.3 PK			2.25 V	234	110.7	-3.4
2	*2467.00	97.1 AV			2.25 V	234	100.5	-3.4
3	2483.50	72.2 PK	74.0	-1.8	2.25 V	234	75.6	-3.4
4	2483.50	51.4 AV	54.0	-2.6	2.25 V	234	54.8	-3.4
5	4934.00	44.6 PK	74.0	-29.4	1.59 V	149	43.4	1.2
6	4934.00	27.8 AV	54.0	-26.2	1.59 V	149	26.6	1.2
7	7401.00	45.4 PK	74.0	-28.6	1.58 V	140	38.4	7.0
8	7401.00	35.4 AV	54.0	-18.6	1.58 V	140	28.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

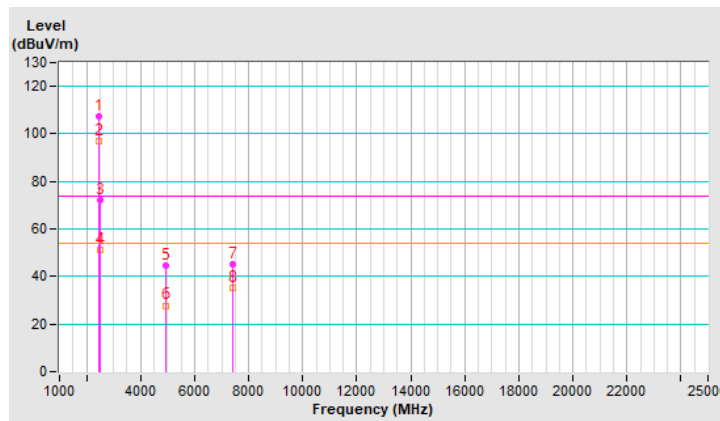


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.9 PK			1.18 H	235	108.3	-3.4
2	*2472.00	95.1 AV			1.18 H	235	98.5	-3.4
3	2483.50	68.6 PK	74.0	-5.4	1.18 H	235	72.0	-3.4
4	2483.50	52.1 AV	54.0	-1.9	1.18 H	235	55.5	-3.4
5	4944.00	42.2 PK	74.0	-31.8	1.66 H	333	41.0	1.2
6	4944.00	25.4 AV	54.0	-28.6	1.66 H	333	24.2	1.2
7	7416.00	43.0 PK	74.0	-31.0	1.60 H	322	35.8	7.2
8	7416.00	32.8 AV	54.0	-21.2	1.60 H	322	25.6	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

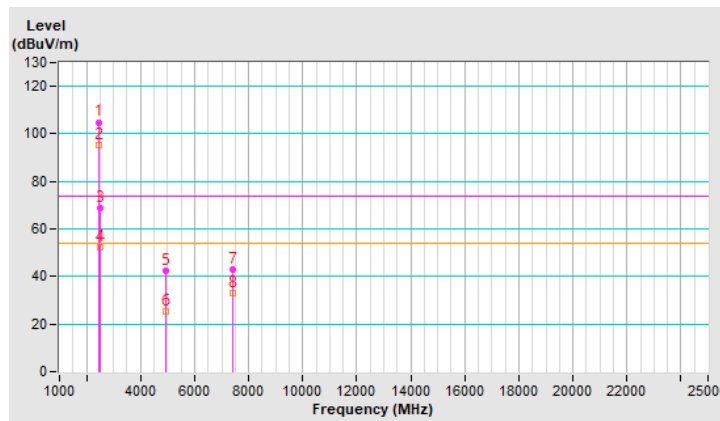


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	103.8 PK			2.18 V	239	107.2	-3.4
2	*2472.00	93.6 AV			2.18 V	239	97.0	-3.4
3	2483.50	68.7 PK	74.0	-5.3	2.18 V	239	72.1	-3.4
4	2483.50	52.2 AV	54.0	-1.8	2.18 V	239	55.6	-3.4
5	4944.00	43.0 PK	74.0	-31.0	1.59 V	157	41.8	1.2
6	4944.00	25.0 AV	54.0	-29.0	1.59 V	157	23.8	1.2
7	7416.00	44.0 PK	74.0	-30.0	1.54 V	165	36.8	7.2
8	7416.00	34.1 AV	54.0	-19.9	1.54 V	165	26.9	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

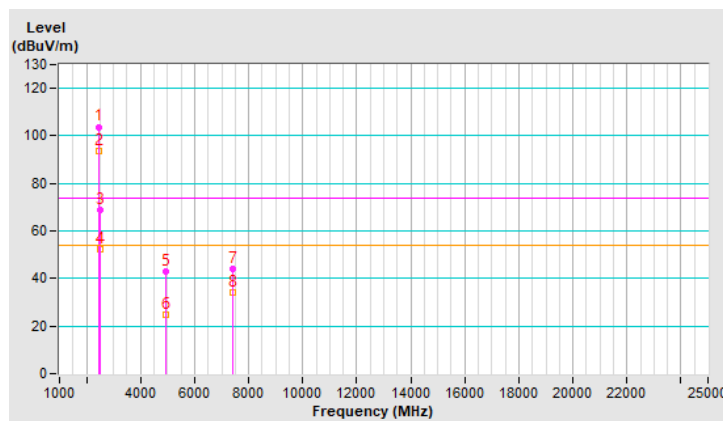


Mode C

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.2 PK	74.0	-14.8	2.12 H	183	62.6	-3.4
2	2390.00	51.2 AV	54.0	-2.8	2.12 H	183	54.6	-3.4
3	*2412.00	107.9 PK			2.12 H	183	111.3	-3.4
4	*2412.00	105.0 AV			2.12 H	183	108.4	-3.4
5	4824.00	41.7 PK	74.0	-32.3	2.52 H	179	40.4	1.3
6	4824.00	34.6 AV	54.0	-19.4	2.52 H	179	33.3	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

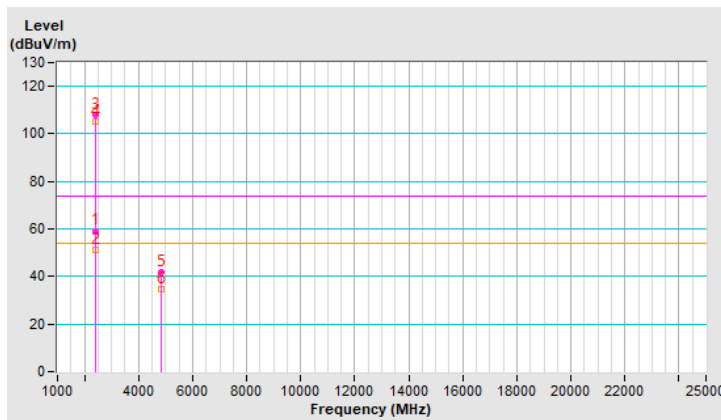


RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.5 PK	74.0	-17.5	1.37 V	81	59.9	-3.4
2	2390.00	46.4 AV	54.0	-7.6	1.37 V	81	49.8	-3.4
3	*2412.00	101.4 PK			1.37 V	81	104.8	-3.4
4	*2412.00	98.6 AV			1.37 V	81	102.0	-3.4
5	4824.00	40.5 PK	74.0	-33.5	2.56 V	181	39.2	1.3
6	4824.00	33.2 AV	54.0	-20.8	2.56 V	181	31.9	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

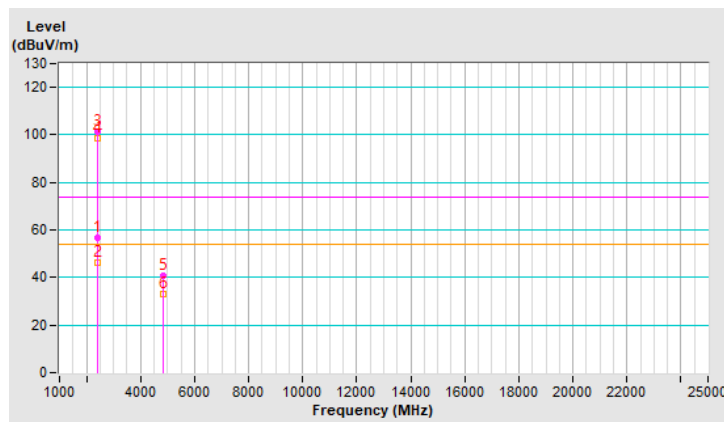


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.0 PK	74.0	-16.0	2.04 H	180	61.4	-3.4
2	2390.00	48.2 AV	54.0	-5.8	2.04 H	180	51.6	-3.4
3	*2437.00	111.4 PK			2.04 H	180	114.8	-3.4
4	*2437.00	108.2 AV			2.04 H	180	111.6	-3.4
5	2483.50	60.5 PK	74.0	-13.5	2.04 H	180	63.9	-3.4
6	2483.50	46.3 AV	54.0	-7.7	2.04 H	180	49.7	-3.4
7	4874.00	39.3 PK	74.0	-34.7	2.11 H	226	38.0	1.3
8	4874.00	32.7 AV	54.0	-21.3	2.11 H	226	31.4	1.3
9	7311.00	46.9 PK	74.0	-27.1	2.14 H	247	39.9	7.0
10	7311.00	36.7 AV	54.0	-17.3	2.14 H	247	29.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

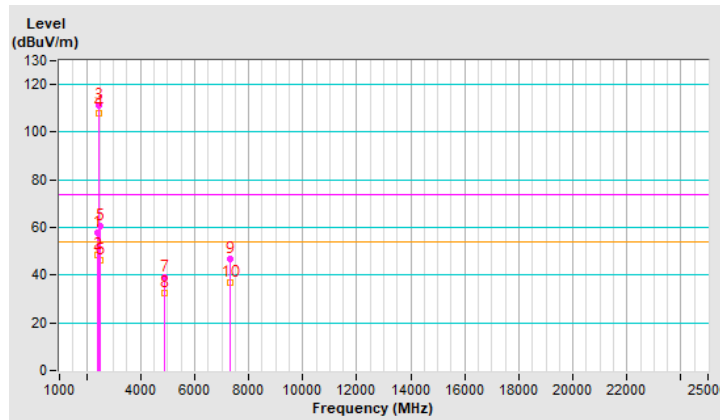


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.2 PK	74.0	-17.8	1.67 V	85	59.6	-3.4
2	2390.00	45.6 AV	54.0	-8.4	1.67 V	85	49.0	-3.4
3	*2437.00	103.8 PK			1.67 V	85	107.2	-3.4
4	*2437.00	101.6 AV			1.67 V	85	105.0	-3.4
5	2483.50	58.0 PK	74.0	-16.0	1.67 V	85	61.4	-3.4
6	2483.50	41.8 AV	54.0	-12.2	1.67 V	85	45.2	-3.4
7	4874.00	40.6 PK	74.0	-33.4	2.11 V	242	39.3	1.3
8	4874.00	33.7 AV	54.0	-20.3	2.11 V	242	32.4	1.3
9	7311.00	47.0 PK	74.0	-27.0	2.12 V	238	40.0	7.0
10	7311.00	36.8 AV	54.0	-17.2	2.12 V	238	29.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

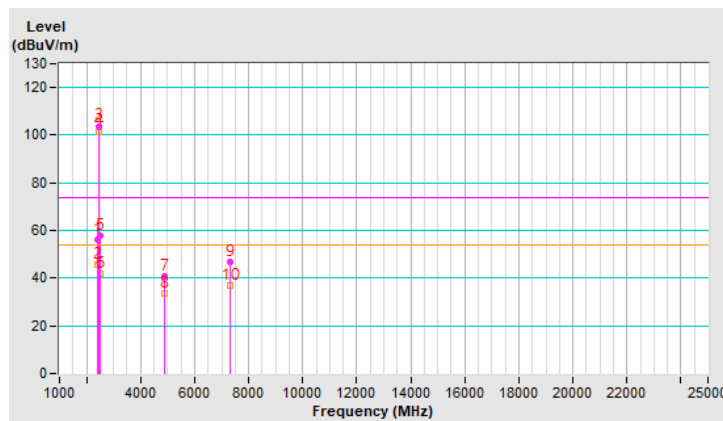


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.5 PK			2.09 H	196	111.9	-3.4
2	*2462.00	105.0 AV			2.09 H	196	108.4	-3.4
3	2483.50	61.5 PK	74.0	-12.5	2.09 H	196	64.9	-3.4
4	2483.50	51.2 AV	54.0	-2.8	2.09 H	196	54.6	-3.4
5	4924.00	41.5 PK	74.0	-32.5	2.12 H	292	40.3	1.2
6	4924.00	34.0 AV	54.0	-20.0	2.12 H	292	32.8	1.2
7	7386.00	46.1 PK	74.0	-27.9	2.05 H	243	39.1	7.0
8	7386.00	35.5 AV	54.0	-18.5	2.05 H	243	28.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

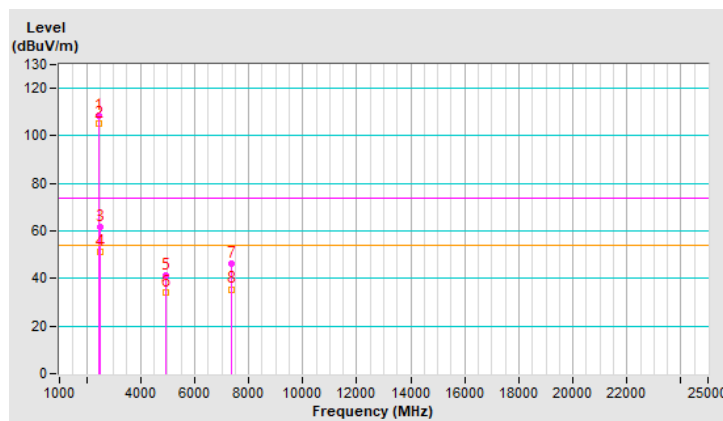


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.5 PK			1.47 V	99	104.9	-3.4
2	*2462.00	98.3 AV			1.47 V	99	101.7	-3.4
3	2483.50	55.2 PK	74.0	-18.8	1.47 V	99	58.6	-3.4
4	2483.50	44.9 AV	54.0	-9.1	1.47 V	99	48.3	-3.4
5	4924.00	40.0 PK	74.0	-34.0	2.12 V	259	38.8	1.2
6	4924.00	32.7 AV	54.0	-21.3	2.12 V	259	31.5	1.2
7	7386.00	47.2 PK	74.0	-26.8	1.87 V	215	40.2	7.0
8	7386.00	37.5 AV	54.0	-16.5	1.87 V	215	30.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

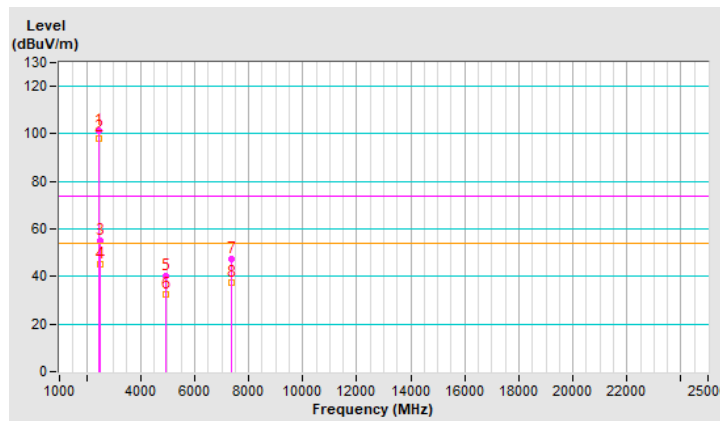


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.8 PK			2.21 H	206	111.2	-3.4
2	*2467.00	103.8 AV			2.21 H	206	107.2	-3.4
3	2483.50	61.9 PK	74.0	-12.1	2.21 H	206	65.3	-3.4
4	2483.50	51.8 AV	54.0	-2.2	2.21 H	206	55.2	-3.4
5	4934.00	40.5 PK	74.0	-33.5	2.17 H	201	39.3	1.2
6	4934.00	32.9 AV	54.0	-21.1	2.17 H	201	31.7	1.2
7	7401.00	46.6 PK	74.0	-27.4	2.40 H	210	39.6	7.0
8	7401.00	36.1 AV	54.0	-17.9	2.40 H	210	29.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

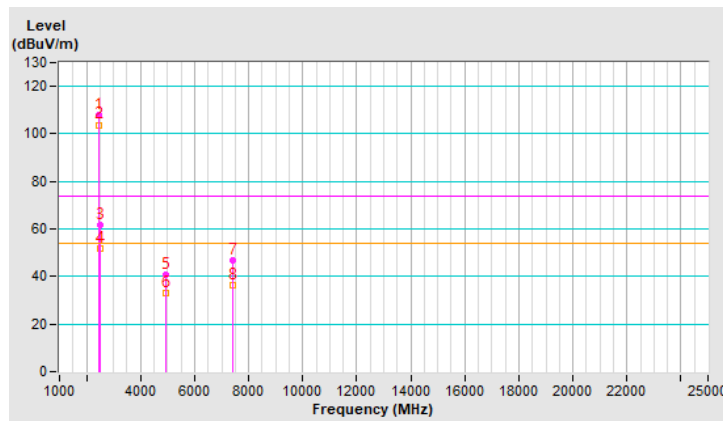


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	100.6 PK			1.50 V	68	104.0	-3.4
2	*2467.00	97.9 AV			1.50 V	68	101.3	-3.4
3	2483.50	55.1 PK	74.0	-18.9	1.50 V	68	58.5	-3.4
4	2483.50	45.6 AV	54.0	-8.4	1.50 V	68	49.0	-3.4
5	4934.00	41.1 PK	74.0	-32.9	2.34 V	259	39.9	1.2
6	4934.00	33.6 AV	54.0	-20.4	2.34 V	259	32.4	1.2
7	7401.00	46.7 PK	74.0	-27.3	1.97 V	267	39.7	7.0
8	7401.00	36.6 AV	54.0	-17.4	1.97 V	267	29.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

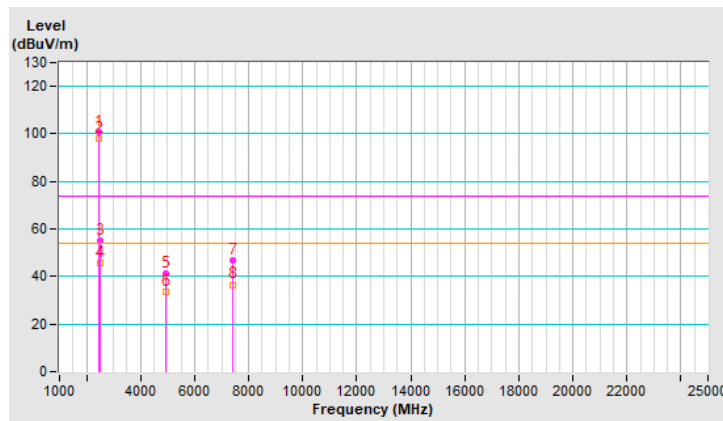


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.0 PK			2.19 H	206	107.4	-3.4
2	*2472.00	100.3 AV			2.19 H	206	103.7	-3.4
3	2483.50	60.5 PK	74.0	-13.5	2.19 H	206	63.9	-3.4
4	2483.50	51.8 AV	54.0	-2.2	2.19 H	206	55.2	-3.4
5	4944.00	41.2 PK	74.0	-32.8	2.15 H	221	40.0	1.2
6	4944.00	33.9 AV	54.0	-20.1	2.15 H	221	32.7	1.2
7	7416.00	45.2 PK	74.0	-28.8	2.37 H	212	38.0	7.2
8	7416.00	35.6 AV	54.0	-18.4	2.37 H	212	28.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

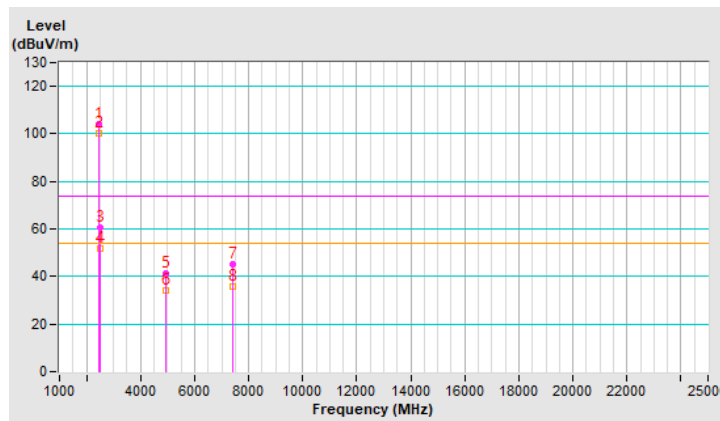


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	95.3 PK			1.44 V	96	98.7	-3.4
2	*2472.00	93.3 AV			1.44 V	96	96.7	-3.4
3	2483.50	55.9 PK	74.0	-18.1	1.44 V	96	59.3	-3.4
4	2483.50	44.7 AV	54.0	-9.3	1.44 V	96	48.1	-3.4
5	4944.00	49.6 PK	74.0	-24.4	2.25 V	167	48.4	1.2
6	4944.00	34.5 AV	54.0	-19.5	2.25 V	167	33.3	1.2
7	7416.00	45.3 PK	74.0	-28.7	2.07 V	240	38.1	7.2
8	7416.00	36.5 AV	54.0	-17.5	2.07 V	240	29.3	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

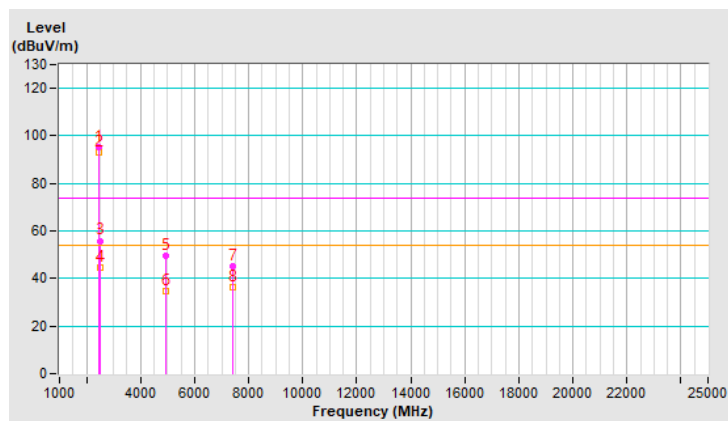


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.0 PK	74.0	-2.0	2.21 H	162	75.4	-3.4
2	2390.00	51.5 AV	54.0	-2.5	2.21 H	162	54.9	-3.4
3	*2412.00	108.9 PK			2.21 H	162	112.3	-3.4
4	*2412.00	98.4 AV			2.21 H	162	101.8	-3.4
5	4824.00	40.1 PK	74.0	-33.9	2.12 H	254	38.8	1.3
6	4824.00	33.6 AV	54.0	-20.4	2.12 H	254	32.3	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

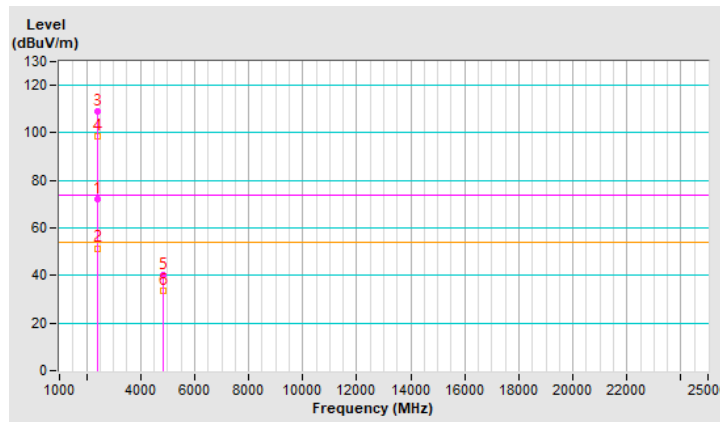


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.9 PK	74.0	-9.1	1.63 V	78	68.3	-3.4
2	2390.00	46.9 AV	54.0	-7.1	1.63 V	78	50.3	-3.4
3	*2412.00	103.7 PK			1.63 V	78	107.1	-3.4
4	*2412.00	94.6 AV			1.63 V	78	98.0	-3.4
5	4824.00	42.0 PK	74.0	-32.0	2.18 V	225	40.7	1.3
6	4824.00	34.5 AV	54.0	-19.5	2.18 V	225	33.2	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

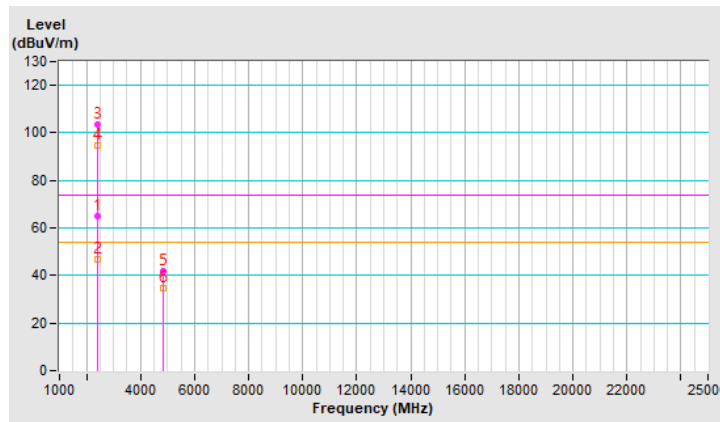


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.5 PK	74.0	-15.5	2.22 H	209	61.9	-3.4
2	2390.00	51.5 AV	54.0	-2.5	2.22 H	209	54.9	-3.4
3	*2437.00	111.0 PK			2.22 H	209	114.4	-3.4
4	*2437.00	108.6 AV			2.22 H	209	112.0	-3.4
5	2483.50	58.1 PK	74.0	-15.9	2.22 H	209	61.5	-3.4
6	2483.50	50.1 AV	54.0	-3.9	2.22 H	209	53.5	-3.4
7	4874.00	41.8 PK	74.0	-32.2	2.11 H	261	40.5	1.3
8	4874.00	33.9 AV	54.0	-20.1	2.11 H	261	32.6	1.3
9	7311.00	46.9 PK	74.0	-27.1	2.18 H	258	39.9	7.0
10	7311.00	36.8 AV	54.0	-17.2	2.18 H	258	29.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

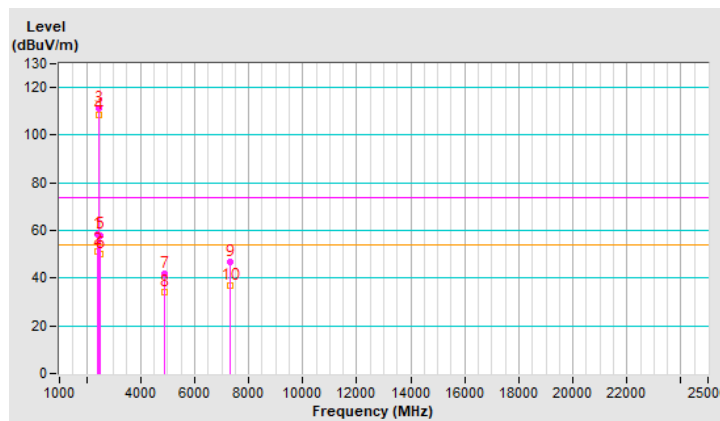


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.0 PK	74.0	-8.0	1.71 V	97	69.4	-3.4
2	2390.00	46.5 AV	54.0	-7.5	1.71 V	97	49.9	-3.4
3	*2437.00	106.3 PK			1.71 V	97	109.7	-3.4
4	*2437.00	105.0 AV			1.71 V	97	108.4	-3.4
5	2483.50	58.8 PK	74.0	-15.2	1.71 V	97	62.2	-3.4
6	2483.50	44.7 AV	54.0	-9.3	1.71 V	97	48.1	-3.4
7	4874.00	41.6 PK	74.0	-32.4	2.29 V	246	40.3	1.3
8	4874.00	34.4 AV	54.0	-19.6	2.29 V	246	33.1	1.3
9	7311.00	46.6 PK	74.0	-27.4	2.21 V	259	39.6	7.0
10	7311.00	35.9 AV	54.0	-18.1	2.21 V	259	28.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

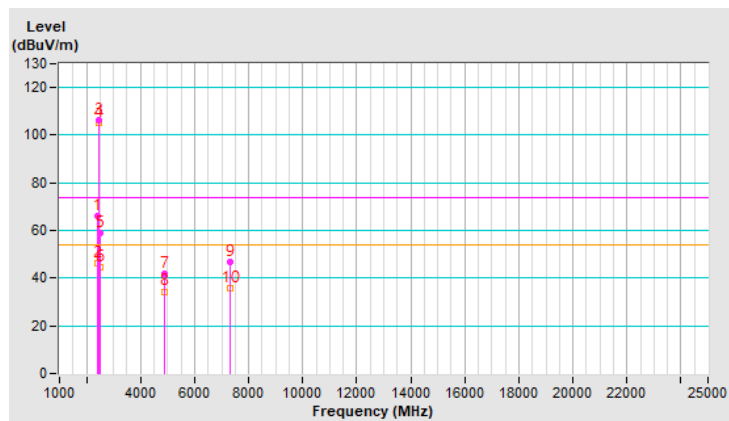


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.1 PK			1.97 H	188	112.5	-3.4
2	*2462.00	99.2 AV			1.97 H	188	102.6	-3.4
3	2483.50	70.3 PK	74.0	-3.7	1.97 H	188	73.7	-3.4
4	2483.50	52.4 AV	54.0	-1.6	1.97 H	188	55.8	-3.4
5	4924.00	41.7 PK	74.0	-32.3	2.05 H	249	40.5	1.2
6	4924.00	33.8 AV	54.0	-20.2	2.05 H	249	32.6	1.2
7	7386.00	45.9 PK	74.0	-28.1	2.16 H	266	38.9	7.0
8	7386.00	36.3 AV	54.0	-17.7	2.16 H	266	29.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

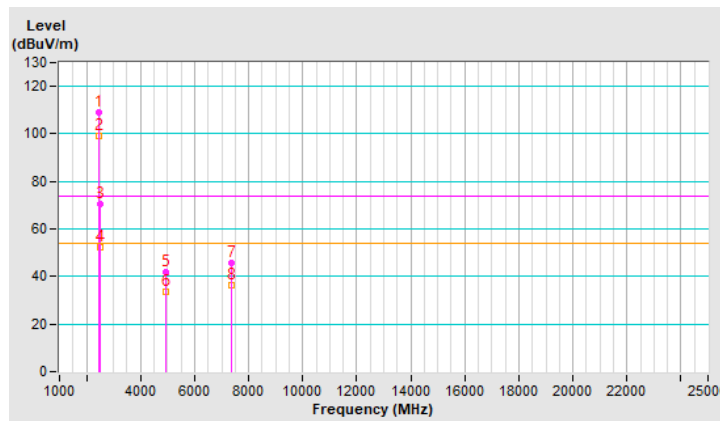


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.6 PK			1.11 V	248	106.0	-3.4
2	*2462.00	93.7 AV			1.11 V	248	97.1	-3.4
3	2483.50	59.0 PK	74.0	-15.0	1.11 V	248	62.4	-3.4
4	2483.50	44.3 AV	54.0	-9.7	1.11 V	248	47.7	-3.4
5	4924.00	40.2 PK	74.0	-33.8	2.22 V	249	39.0	1.2
6	4924.00	33.3 AV	54.0	-20.7	2.22 V	249	32.1	1.2
7	7386.00	47.3 PK	74.0	-26.7	2.21 V	287	40.3	7.0
8	7386.00	37.2 AV	54.0	-16.8	2.21 V	287	30.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

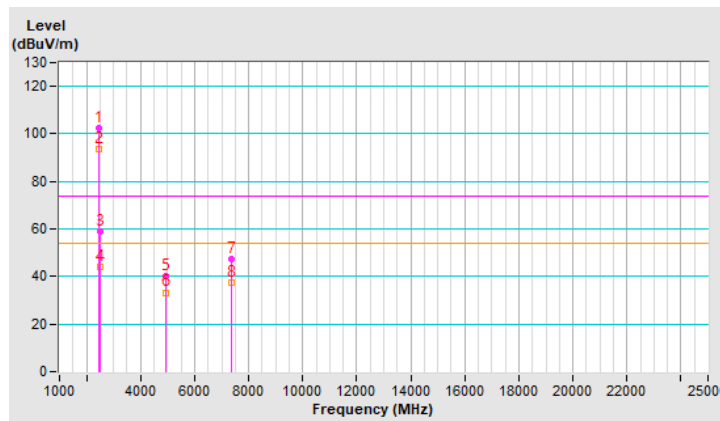


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.9 PK			1.54 H	203	108.3	-3.4
2	*2467.00	95.6 AV			1.54 H	203	99.0	-3.4
3	2483.50	71.8 PK	74.0	-2.2	1.54 H	203	75.2	-3.4
4	2483.50	52.3 AV	54.0	-1.7	1.54 H	203	55.7	-3.4
5	4934.00	40.8 PK	74.0	-33.2	2.06 H	205	39.6	1.2
6	4934.00	33.0 AV	54.0	-21.0	2.06 H	205	31.8	1.2
7	7401.00	47.7 PK	74.0	-26.3	2.27 H	250	40.7	7.0
8	7401.00	37.1 AV	54.0	-16.9	2.27 H	250	30.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

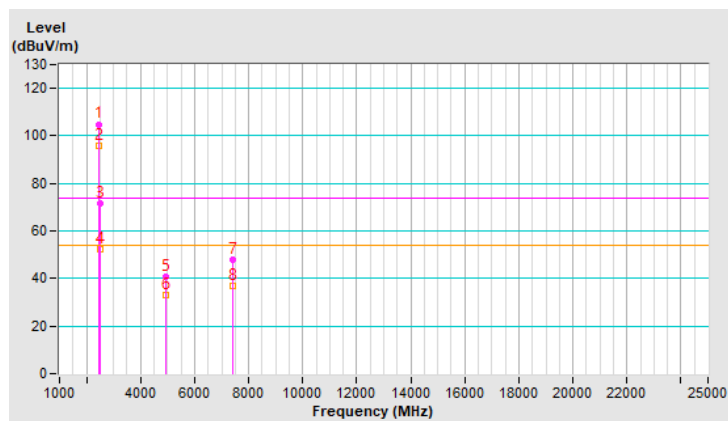


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	101.1 PK			1.63 V	324	104.5	-3.4
2	*2467.00	92.2 AV			1.63 V	324	95.6	-3.4
3	2483.50	58.5 PK	74.0	-15.5	1.63 V	324	61.9	-3.4
4	2483.50	46.0 AV	54.0	-8.0	1.63 V	324	49.4	-3.4
5	4934.00	41.4 PK	74.0	-32.6	2.14 V	252	40.2	1.2
6	4934.00	34.1 AV	54.0	-19.9	2.14 V	252	32.9	1.2
7	7401.00	47.2 PK	74.0	-26.8	2.20 V	255	40.2	7.0
8	7401.00	36.4 AV	54.0	-17.6	2.20 V	255	29.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

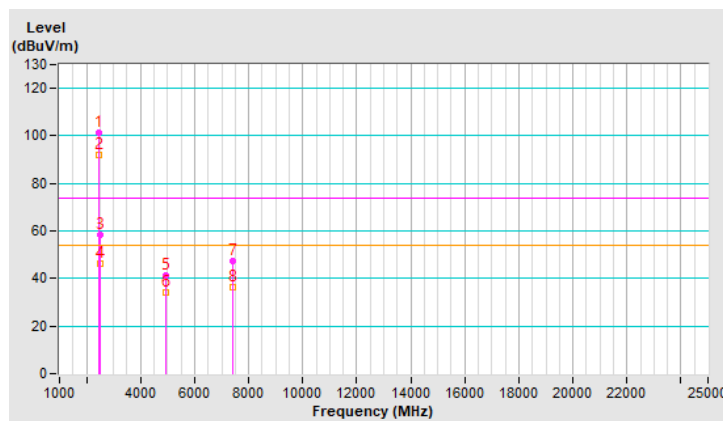


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	95.6 PK			1.80 H	220	99.0	-3.4
2	*2472.00	86.2 AV			1.80 H	220	89.6	-3.4
3	2483.50	72.6 PK	74.0	-1.4	1.80 H	220	76.0	-3.4
4	2483.50	52.1 AV	54.0	-1.9	1.80 H	220	55.5	-3.4
5	4944.00	40.5 PK	74.0	-33.5	2.05 H	285	39.3	1.2
6	4944.00	33.1 AV	54.0	-20.9	2.05 H	285	31.9	1.2
7	7416.00	47.8 PK	74.0	-26.2	2.33 H	288	40.6	7.2
8	7416.00	37.2 AV	54.0	-16.8	2.33 H	288	30.0	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

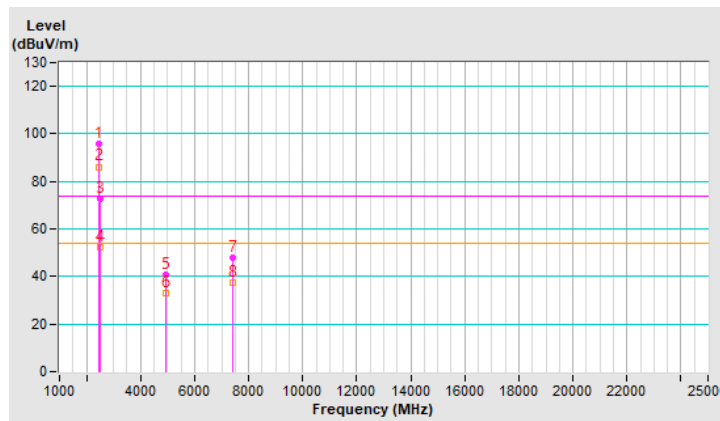


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	89.0 PK			1.78 V	325	92.4	-3.4
2	*2472.00	80.1 AV			1.78 V	325	83.5	-3.4
3	2483.50	52.4 PK	74.0	-21.6	1.78 V	325	55.8	-3.4
4	2483.50	39.4 AV	54.0	-14.6	1.78 V	325	42.8	-3.4
5	4944.00	40.3 PK	74.0	-33.7	2.15 V	249	39.1	1.2
6	4944.00	32.8 AV	54.0	-21.2	2.15 V	249	31.6	1.2
7	7416.00	47.6 PK	74.0	-26.4	2.27 V	286	40.4	7.2
8	7416.00	37.3 AV	54.0	-16.7	2.27 V	286	30.1	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

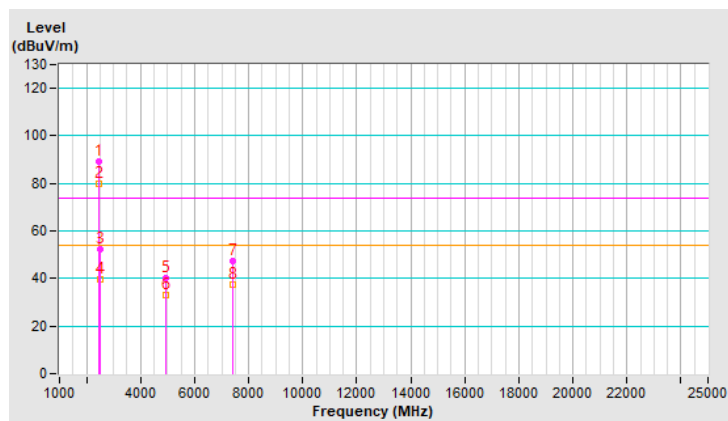


RF Mode	802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	1.85 H	180	68.9	-3.4
2	2390.00	51.5 AV	54.0	-2.5	1.85 H	180	54.9	-3.4
3	*2412.00	109.9 PK			1.85 H	180	113.3	-3.4
4	*2412.00	98.3 AV			1.85 H	180	101.7	-3.4
5	4824.00	41.4 PK	74.0	-32.6	1.90 H	251	40.1	1.3
6	4824.00	33.2 AV	54.0	-20.8	1.90 H	251	31.9	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

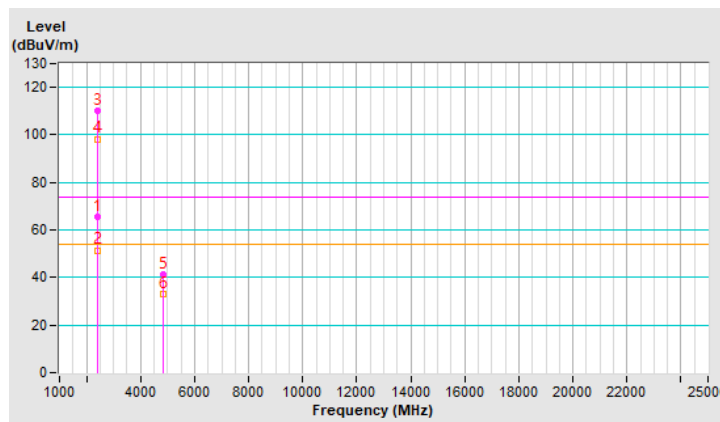


RF Mode	802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.1 PK	74.0	-18.9	1.82 V	336	58.5	-3.4
2	2390.00	42.0 AV	54.0	-12.0	1.82 V	336	45.4	-3.4
3	*2412.00	106.5 PK			1.82 V	336	109.9	-3.4
4	*2412.00	95.8 AV			1.82 V	336	99.2	-3.4
5	4824.00	42.5 PK	74.0	-31.5	2.03 V	272	41.2	1.3
6	4824.00	34.9 AV	54.0	-19.1	2.03 V	272	33.6	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

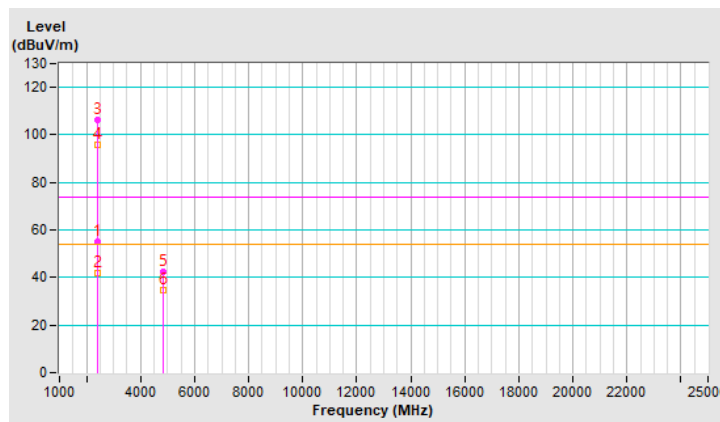


RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.0 PK	74.0	-4.0	2.20 H	197	73.4	-3.4
2	2390.00	51.4 AV	54.0	-2.6	2.20 H	197	54.8	-3.4
3	*2437.00	113.3 PK			2.20 H	197	116.7	-3.4
4	*2437.00	101.9 AV			2.20 H	197	105.3	-3.4
5	2483.50	73.5 PK	74.0	-0.5	2.20 H	197	76.9	-3.4
6	2483.50	50.7 AV	54.0	-3.3	2.20 H	197	54.1	-3.4
7	4874.00	40.3 PK	74.0	-33.7	2.08 H	233	39.0	1.3
8	4874.00	32.5 AV	54.0	-21.5	2.08 H	233	31.2	1.3
9	7311.00	45.5 PK	74.0	-28.5	2.23 H	290	38.5	7.0
10	7311.00	35.4 AV	54.0	-18.6	2.23 H	290	28.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

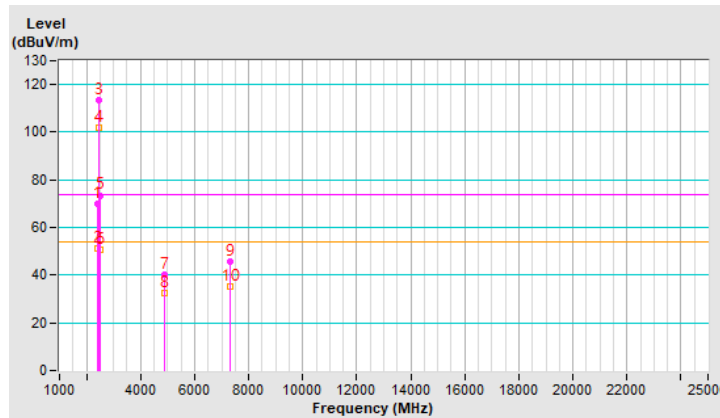


RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.7 PK	74.0	-17.3	1.64 V	333	60.1	-3.4
2	2390.00	43.2 AV	54.0	-10.8	1.64 V	333	46.6	-3.4
3	*2437.00	109.5 PK			1.64 V	333	112.9	-3.4
4	*2437.00	99.5 AV			1.64 V	333	102.9	-3.4
5	2483.50	57.9 PK	74.0	-16.1	1.64 V	333	61.3	-3.4
6	2483.50	44.2 AV	54.0	-9.8	1.64 V	333	47.6	-3.4
7	4874.00	42.0 PK	74.0	-32.0	2.19 V	270	40.7	1.3
8	4874.00	34.8 AV	54.0	-19.2	2.19 V	270	33.5	1.3
9	7311.00	47.0 PK	74.0	-27.0	2.29 V	304	40.0	7.0
10	7311.00	36.5 AV	54.0	-17.5	2.29 V	304	29.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

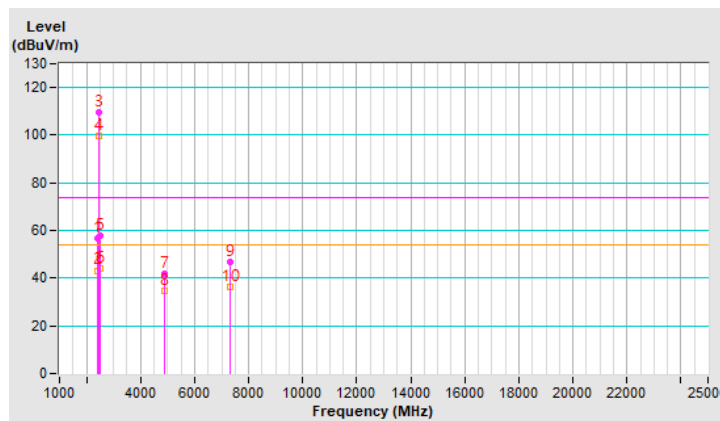


RF Mode	802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.8 PK			1.44 H	198	109.2	-3.4
2	*2462.00	95.9 AV			1.44 H	198	99.3	-3.4
3	2483.50	68.8 PK	74.0	-5.2	1.44 H	198	72.2	-3.4
4	2483.50	51.0 AV	54.0	-3.0	1.44 H	198	54.4	-3.4
5	4924.00	39.7 PK	74.0	-34.3	2.09 H	248	38.5	1.2
6	4924.00	32.1 AV	54.0	-21.9	2.09 H	248	30.9	1.2
7	7386.00	47.1 PK	74.0	-26.9	2.33 H	253	40.1	7.0
8	7386.00	36.6 AV	54.0	-17.4	2.33 H	253	29.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

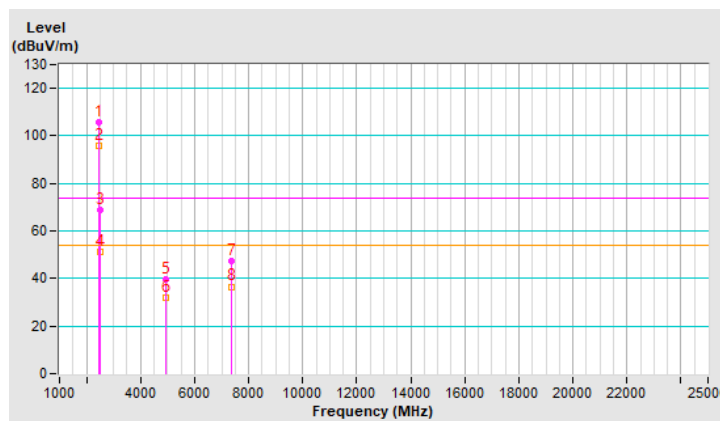


RF Mode	802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.9 PK			1.58 V	315	106.3	-3.4
2	*2462.00	93.2 AV			1.58 V	315	96.6	-3.4
3	2483.50	57.8 PK	74.0	-16.2	1.58 V	315	61.2	-3.4
4	2483.50	44.1 AV	54.0	-9.9	1.58 V	315	47.5	-3.4
5	4924.00	40.4 PK	74.0	-33.6	2.24 V	254	39.2	1.2
6	4924.00	33.6 AV	54.0	-20.4	2.24 V	254	32.4	1.2
7	7386.00	47.2 PK	74.0	-26.8	2.33 V	272	40.2	7.0
8	7386.00	37.1 AV	54.0	-16.9	2.33 V	272	30.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

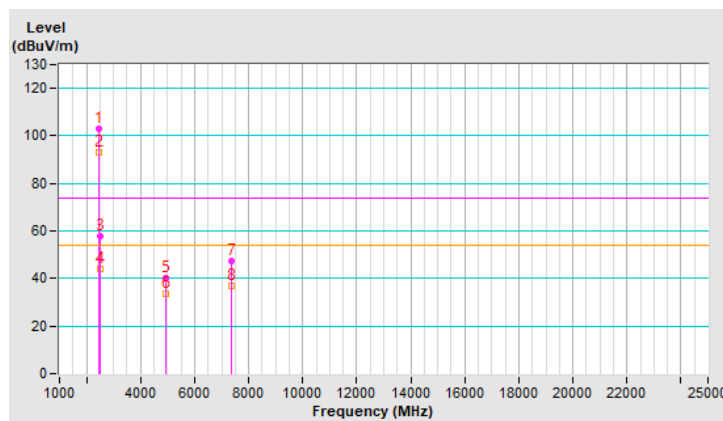


RF Mode	802.11ax (HE20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.1 PK			1.87 H	150	107.5	-3.4
2	*2467.00	93.4 AV			1.87 H	150	96.8	-3.4
3	2483.50	68.5 PK	74.0	-5.5	1.87 H	150	71.9	-3.4
4	2483.50	52.7 AV	54.0	-1.3	1.87 H	150	56.1	-3.4
5	4934.00	40.4 PK	74.0	-33.6	2.12 H	270	39.2	1.2
6	4934.00	33.1 AV	54.0	-20.9	2.12 H	270	31.9	1.2
7	7401.00	47.4 PK	74.0	-26.6	2.24 H	251	40.4	7.0
8	7401.00	37.1 AV	54.0	-16.9	2.24 H	251	30.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

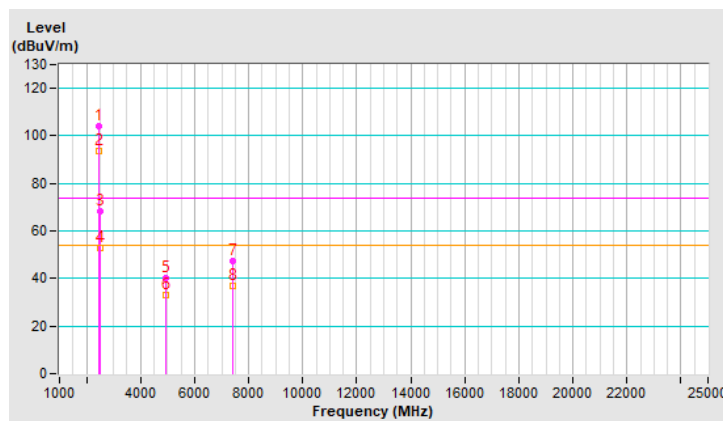


RF Mode	802.11ax (HE20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	101.6 PK			1.81 V	331	105.0	-3.4
2	*2467.00	91.3 AV			1.81 V	331	94.7	-3.4
3	2483.50	58.6 PK	74.0	-15.4	1.81 V	331	62.0	-3.4
4	2483.50	45.2 AV	54.0	-8.8	1.81 V	331	48.6	-3.4
5	4934.00	40.4 PK	74.0	-33.6	2.27 V	244	39.2	1.2
6	4934.00	32.9 AV	54.0	-21.1	2.27 V	244	31.7	1.2
7	7401.00	46.0 PK	74.0	-28.0	2.23 V	261	39.0	7.0
8	7401.00	35.9 AV	54.0	-18.1	2.23 V	261	28.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

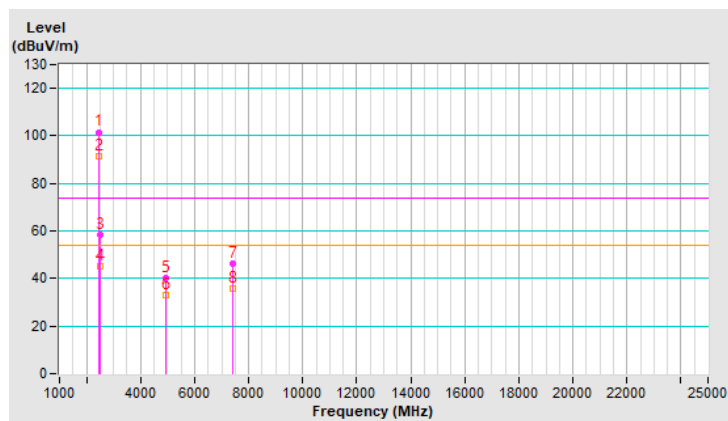


RF Mode	802.11ax (HE20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	93.2 PK			2.22 H	176	96.6	-3.4
2	*2472.00	82.1 AV			2.22 H	176	85.5	-3.4
3	2483.50	72.6 PK	74.0	-1.4	2.22 H	176	76.0	-3.4
4	2483.50	46.3 AV	54.0	-7.7	2.22 H	176	49.7	-3.4
5	4944.00	40.2 PK	74.0	-33.8	2.25 H	275	39.0	1.2
6	4944.00	32.8 AV	54.0	-21.2	2.25 H	275	31.6	1.2
7	7416.00	47.2 PK	74.0	-26.8	2.17 H	243	40.0	7.2
8	7416.00	37.0 AV	54.0	-17.0	2.17 H	243	29.8	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

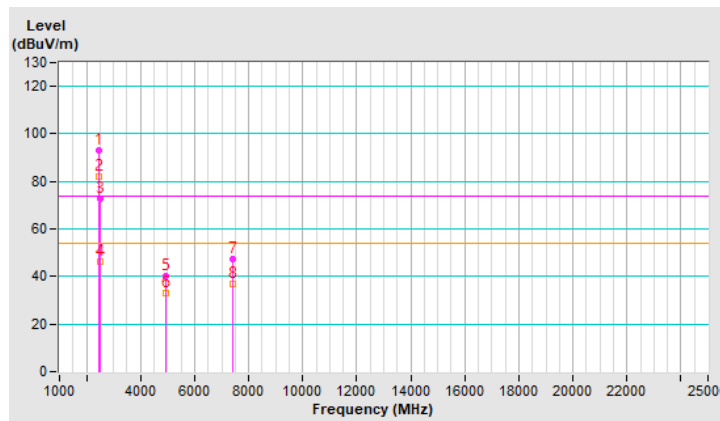


RF Mode	802.11ax (HE20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.1 PK			1.57 V	353	102.5	-3.4
2	*2472.00	88.7 AV			1.57 V	353	92.1	-3.4
3	2483.50	58.0 PK	74.0	-16.0	1.57 V	353	61.4	-3.4
4	2483.50	43.8 AV	54.0	-10.2	1.57 V	353	47.2	-3.4
5	4944.00	39.0 PK	74.0	-35.0	2.20 V	264	37.8	1.2
6	4944.00	32.3 AV	54.0	-21.7	2.20 V	264	31.1	1.2
7	7416.00	46.3 PK	74.0	-27.7	2.15 V	251	39.1	7.2
8	7416.00	36.6 AV	54.0	-17.4	2.15 V	251	29.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

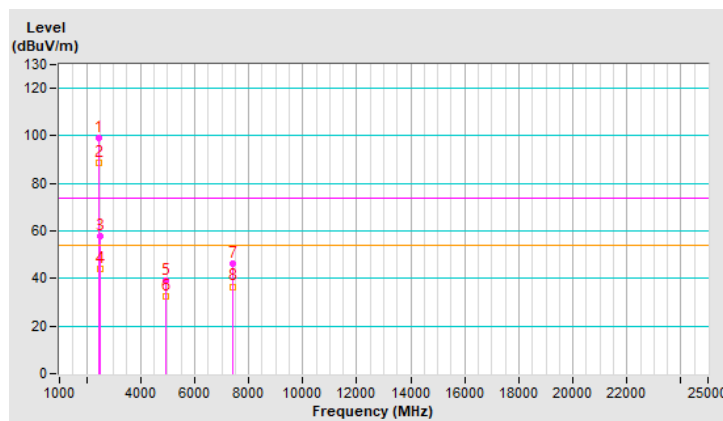


RF Mode	802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.8 PK	74.0	-0.2	1.91 H	157	77.2	-3.4
2	2390.00	53.5 AV	54.0	-0.5	1.91 H	157	56.9	-3.4
3	*2422.00	105.3 PK			1.91 H	157	108.7	-3.4
4	*2422.00	93.0 AV			1.91 H	157	96.4	-3.4
5	4844.00	40.6 PK	74.0	-33.4	2.03 H	277	39.3	1.3
6	4844.00	33.0 AV	54.0	-21.0	2.03 H	277	31.7	1.3
7	7266.00	46.1 PK	74.0	-27.9	2.23 H	285	38.9	7.2
8	7266.00	36.5 AV	54.0	-17.5	2.23 H	285	29.3	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

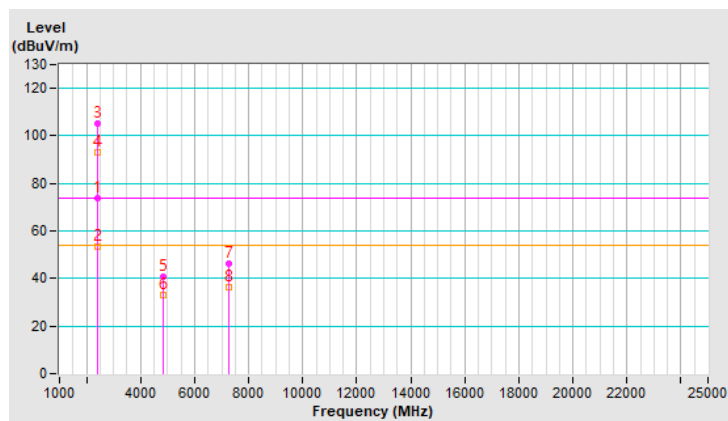


RF Mode	802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.0 PK	74.0	-20.0	1.68 V	317	57.4	-3.4
2	2390.00	40.9 AV	54.0	-13.1	1.68 V	317	44.3	-3.4
3	*2422.00	99.7 PK			1.68 V	317	103.1	-3.4
4	*2422.00	88.6 AV			1.68 V	317	92.0	-3.4
5	4844.00	41.6 PK	74.0	-32.4	1.99 V	303	40.3	1.3
6	4844.00	34.3 AV	54.0	-19.7	1.99 V	303	33.0	1.3
7	7266.00	48.0 PK	74.0	-26.0	2.26 V	290	40.8	7.2
8	7266.00	37.2 AV	54.0	-16.8	2.26 V	290	30.0	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

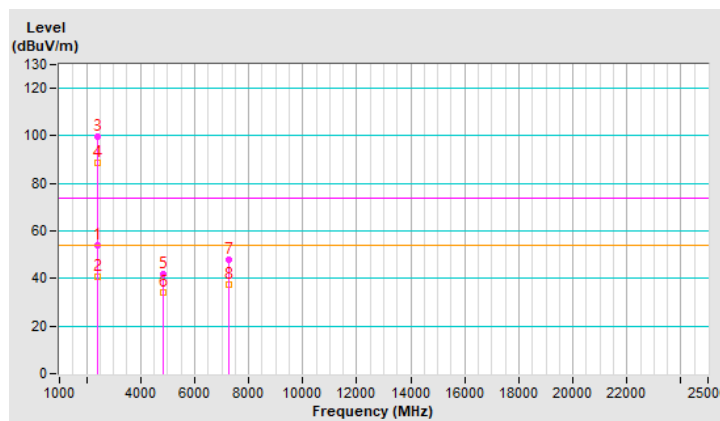


RF Mode	802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.2 PK	74.0	-11.8	2.32 H	180	65.6	-3.4
2	2390.00	47.5 AV	54.0	-6.5	2.32 H	180	50.9	-3.4
3	*2437.00	108.1 PK			2.32 H	180	111.5	-3.4
4	*2437.00	95.9 AV			2.32 H	180	99.3	-3.4
5	2483.50	66.3 PK	74.0	-7.7	2.32 H	180	69.7	-3.4
6	2483.50	52.4 AV	54.0	-1.6	2.32 H	180	55.8	-3.4
7	4874.00	41.4 PK	74.0	-32.6	1.84 H	252	40.1	1.3
8	4874.00	34.2 AV	54.0	-19.8	1.84 H	252	32.9	1.3
9	7311.00	46.5 PK	74.0	-27.5	2.19 H	253	39.5	7.0
10	7311.00	35.8 AV	54.0	-18.2	2.19 H	253	28.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

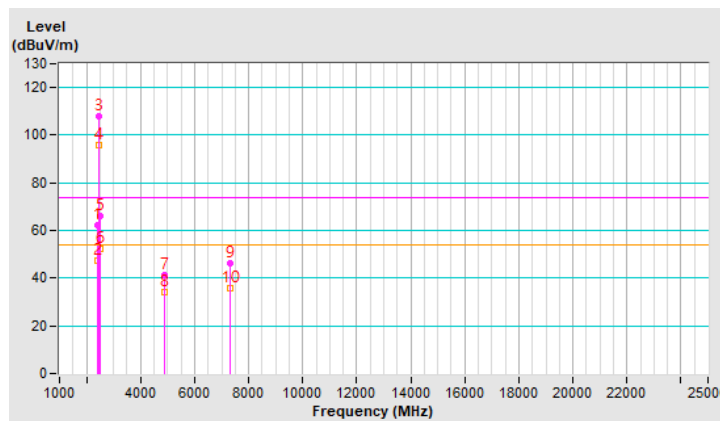


RF Mode	802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.4 PK	74.0	-21.6	1.66 V	311	55.8	-3.4
2	2390.00	41.7 AV	54.0	-12.3	1.66 V	311	45.1	-3.4
3	*2437.00	103.5 PK			1.66 V	311	106.9	-3.4
4	*2437.00	92.0 AV			1.66 V	311	95.4	-3.4
5	2483.50	56.5 PK	74.0	-17.5	1.66 V	311	59.9	-3.4
6	2483.50	42.5 AV	54.0	-11.5	1.66 V	311	45.9	-3.4
7	4874.00	40.8 PK	74.0	-33.2	2.14 V	252	39.5	1.3
8	4874.00	32.9 AV	54.0	-21.1	2.14 V	252	31.6	1.3
9	7311.00	44.8 PK	74.0	-29.2	2.35 V	304	37.8	7.0
10	7311.00	34.9 AV	54.0	-19.1	2.35 V	304	27.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

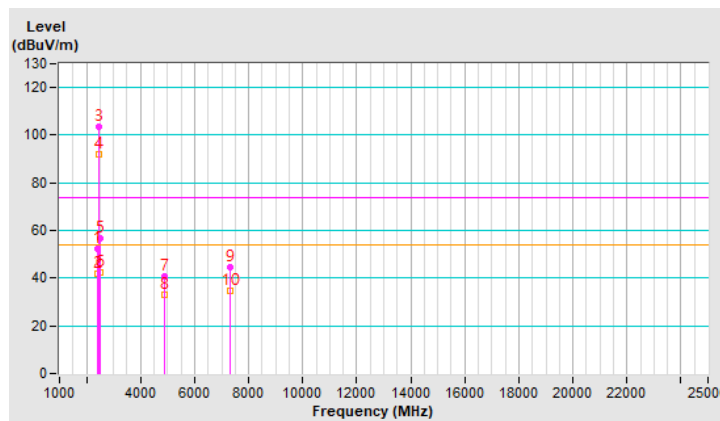


RF Mode	802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	104.2 PK			1.85 H	158	107.5	-3.3
2	*2452.00	92.1 AV			1.85 H	158	95.4	-3.3
3	2483.50	70.9 PK	74.0	-3.1	1.85 H	158	74.3	-3.4
4	2483.50	51.5 AV	54.0	-2.5	1.85 H	158	54.9	-3.4
5	4904.00	41.7 PK	74.0	-32.3	2.08 H	280	40.5	1.2
6	4904.00	33.3 AV	54.0	-20.7	2.08 H	280	32.1	1.2
7	7356.00	47.9 PK	74.0	-26.1	2.08 H	283	40.9	7.0
8	7356.00	37.3 AV	54.0	-16.7	2.08 H	283	30.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

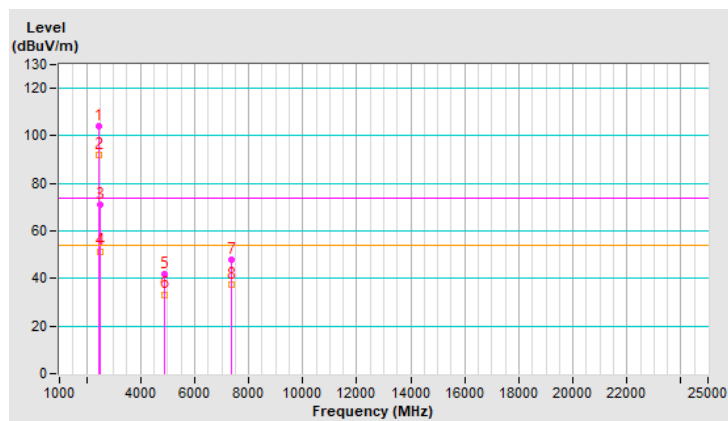


RF Mode	802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	100.5 PK			1.69 V	334	103.8	-3.3
2	*2452.00	88.8 AV			1.69 V	334	92.1	-3.3
3	2483.50	59.0 PK	74.0	-15.0	1.69 V	334	62.4	-3.4
4	2483.50	44.7 AV	54.0	-9.3	1.69 V	334	48.1	-3.4
5	4904.00	41.2 PK	74.0	-32.8	2.09 V	241	40.0	1.2
6	4904.00	33.6 AV	54.0	-20.4	2.09 V	241	32.4	1.2
7	7356.00	48.3 PK	74.0	-25.7	2.39 V	303	41.3	7.0
8	7356.00	37.7 AV	54.0	-16.3	2.39 V	303	30.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

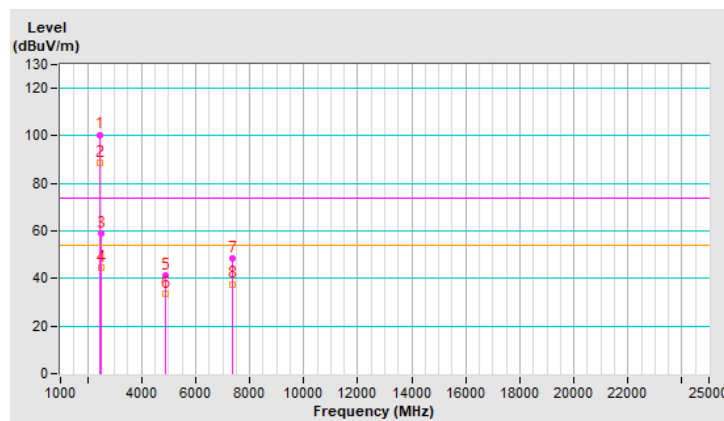


RF Mode	802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	105.0 PK			1.62 H	211	108.4	-3.4
2	*2457.00	93.0 AV			1.62 H	211	96.4	-3.4
3	2483.50	72.6 PK	74.0	-1.4	1.62 H	211	76.0	-3.4
4	2483.50	52.9 AV	54.0	-1.1	1.62 H	211	56.3	-3.4
5	4914.00	40.1 PK	74.0	-33.9	2.16 H	216	38.9	1.2
6	4914.00	32.7 AV	54.0	-21.3	2.16 H	216	31.5	1.2
7	7371.00	47.9 PK	74.0	-26.1	2.15 H	265	40.9	7.0
8	7371.00	36.9 AV	54.0	-17.1	2.15 H	265	29.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

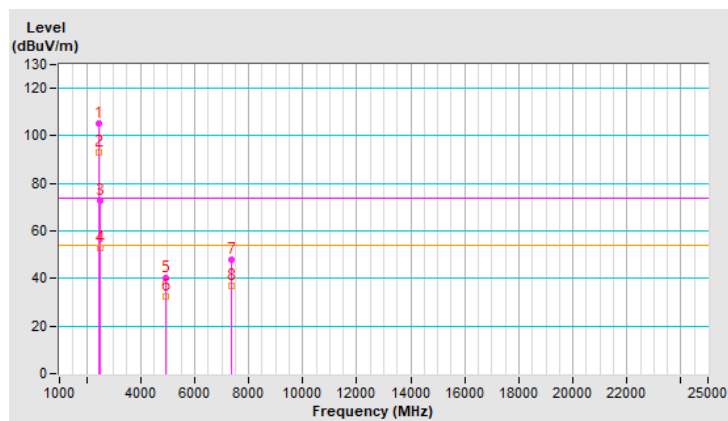


RF Mode	802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	102.3 PK			1.68 V	321	105.7	-3.4
2	*2457.00	90.0 AV			1.68 V	321	93.4	-3.4
3	2483.50	57.9 PK	74.0	-16.1	1.68 V	321	61.3	-3.4
4	2483.50	44.8 AV	54.0	-9.2	1.68 V	321	48.2	-3.4
5	4914.00	40.9 PK	74.0	-33.1	2.21 V	253	39.7	1.2
6	4914.00	34.1 AV	54.0	-19.9	2.21 V	253	32.9	1.2
7	7371.00	45.9 PK	74.0	-28.1	2.19 V	249	38.9	7.0
8	7371.00	36.1 AV	54.0	-17.9	2.19 V	249	29.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

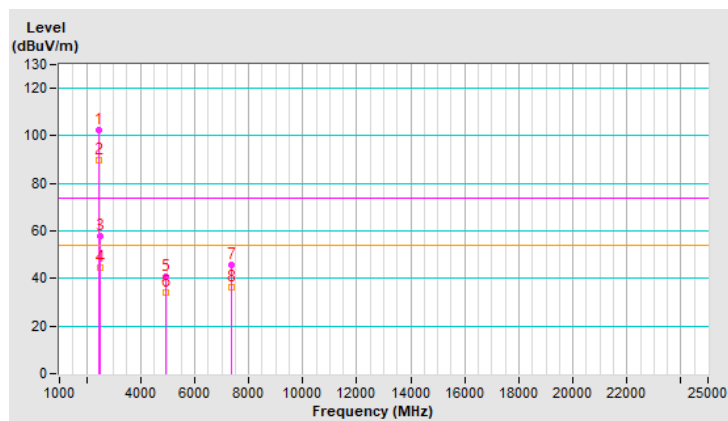


RF Mode	802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	96.0 PK			1.89 H	189	99.4	-3.4
2	*2462.00	84.1 AV			1.89 H	189	87.5	-3.4
3	2483.50	72.8 PK	74.0	-1.2	1.89 H	189	76.2	-3.4
4	2483.50	49.3 AV	54.0	-4.7	1.89 H	189	52.7	-3.4
5	4924.00	40.1 PK	74.0	-33.9	2.06 H	234	38.9	1.2
6	4924.00	32.9 AV	54.0	-21.1	2.06 H	234	31.7	1.2
7	7386.00	45.4 PK	74.0	-28.6	2.18 H	270	38.4	7.0
8	7386.00	36.2 AV	54.0	-17.8	2.18 H	270	29.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

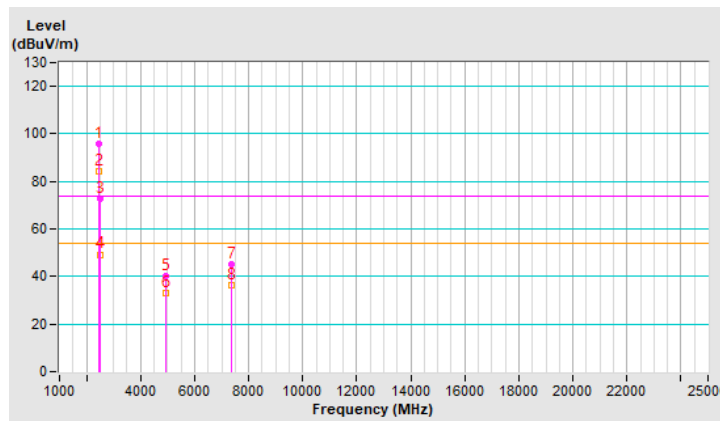


RF Mode	802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.4 PK			1.66 V	305	101.8	-3.4
2	*2462.00	87.0 AV			1.66 V	305	90.4	-3.4
3	2483.50	60.2 PK	74.0	-13.8	1.66 V	305	63.6	-3.4
4	2483.50	48.6 AV	54.0	-5.4	1.66 V	305	52.0	-3.4
5	4924.00	40.9 PK	74.0	-33.1	2.25 V	271	39.7	1.2
6	4924.00	33.4 AV	54.0	-20.6	2.25 V	271	32.2	1.2
7	7386.00	48.1 PK	74.0	-25.9	2.24 V	294	41.1	7.0
8	7386.00	37.9 AV	54.0	-16.1	2.24 V	294	30.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

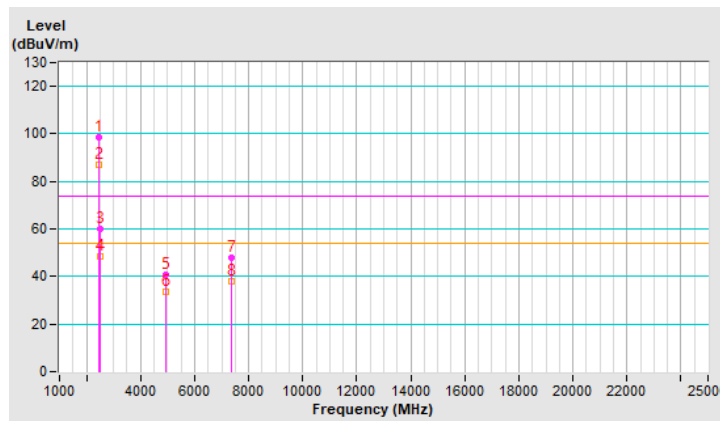


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.04 H	357	75.7	-3.4
2	2390.00	47.6 AV	54.0	-6.4	1.04 H	357	51.0	-3.4
3	*2412.00	113.0 PK			1.04 H	357	116.4	-3.4
4	*2412.00	102.6 AV			1.04 H	357	106.0	-3.4
5	4824.00	48.7 PK	74.0	-25.3	1.05 H	322	47.4	1.3
6	4824.00	27.1 AV	54.0	-26.9	1.05 H	322	25.8	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

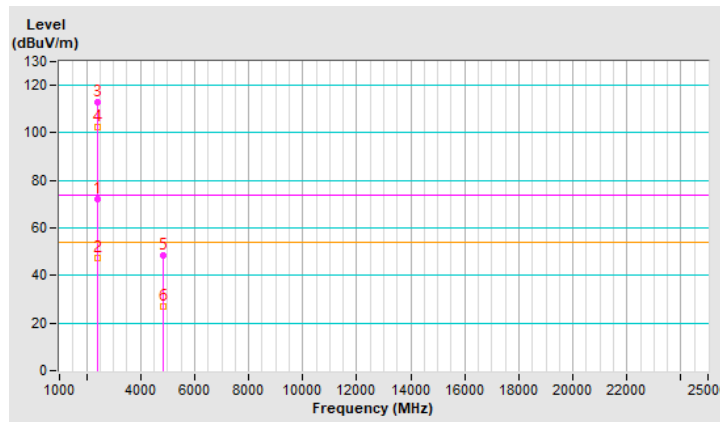


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	2.58 V	263	74.0	-3.4
2	2390.00	46.8 AV	54.0	-7.2	2.58 V	263	50.2	-3.4
3	*2412.00	109.6 PK			2.58 V	263	113.0	-3.4
4	*2412.00	100.5 AV			2.58 V	263	103.9	-3.4
5	4824.00	47.3 PK	74.0	-26.7	1.45 V	160	46.0	1.3
6	4824.00	26.0 AV	54.0	-28.0	1.45 V	160	24.7	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

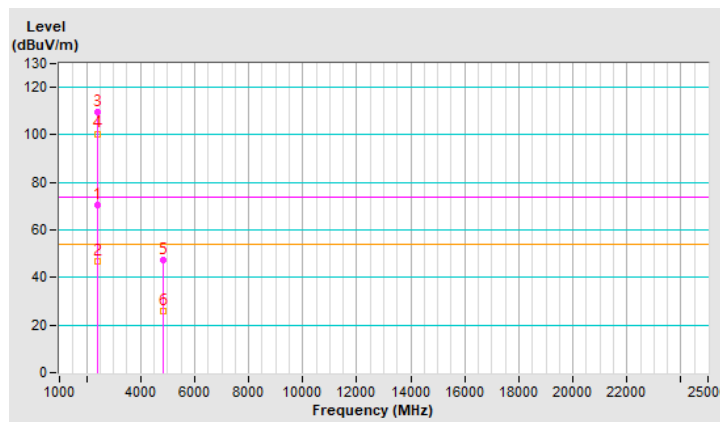


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.4 PK	74.0	-22.6	1.01 H	349	54.8	-3.4
2	2390.00	41.0 AV	54.0	-13.0	1.01 H	349	44.4	-3.4
3	*2437.00	117.7 PK			1.01 H	349	121.1	-3.4
4	*2437.00	107.1 AV			1.01 H	349	110.5	-3.4
5	2483.50	51.1 PK	74.0	-22.9	1.01 H	349	54.5	-3.4
6	2483.50	38.9 AV	54.0	-15.1	1.01 H	349	42.3	-3.4
7	4874.00	51.7 PK	74.0	-22.3	1.05 H	318	50.4	1.3
8	4874.00	30.1 AV	54.0	-23.9	1.05 H	318	28.8	1.3
9	7311.00	54.0 PK	74.0	-20.0	1.06 H	327	47.0	7.0
10	7311.00	40.0 AV	54.0	-14.0	1.06 H	327	33.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

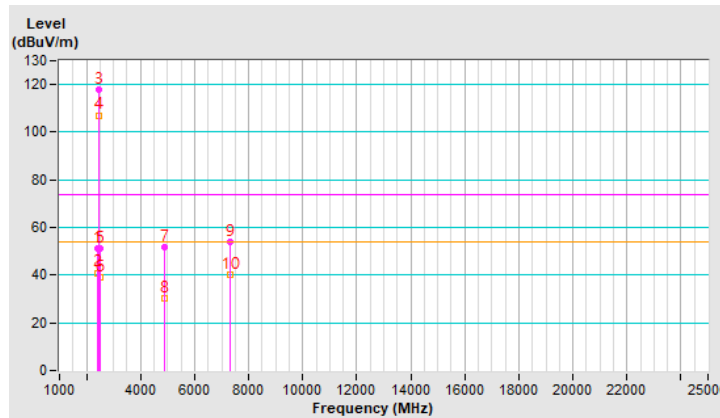


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.5 PK	74.0	-23.5	2.59 V	252	53.9	-3.4
2	2390.00	40.1 AV	54.0	-13.9	2.59 V	252	43.5	-3.4
3	*2437.00	115.5 PK			2.59 V	252	118.9	-3.4
4	*2437.00	105.4 AV			2.59 V	252	108.8	-3.4
5	2483.50	50.5 PK	74.0	-23.5	2.59 V	252	53.9	-3.4
6	2483.50	39.1 AV	54.0	-14.9	2.59 V	252	42.5	-3.4
7	4874.00	49.2 PK	74.0	-24.8	1.54 V	145	47.9	1.3
8	4874.00	28.2 AV	54.0	-25.8	1.54 V	145	26.9	1.3
9	7311.00	53.1 PK	74.0	-20.9	1.50 V	146	46.1	7.0
10	7311.00	39.2 AV	54.0	-14.8	1.50 V	146	32.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

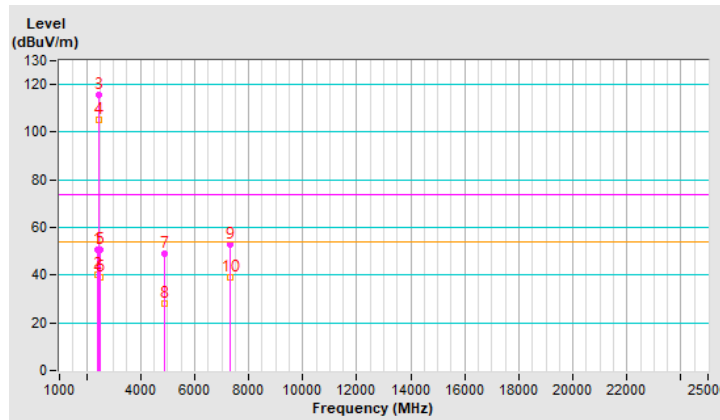

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.7 PK			1.04 H	353	116.1	-3.4
2	*2462.00	102.3 AV			1.04 H	353	105.7	-3.4
3	2483.50	72.8 PK	74.0	-1.2	1.04 H	353	76.2	-3.4
4	2483.50	47.4 AV	54.0	-6.6	1.04 H	353	50.8	-3.4
5	4924.00	47.7 PK	74.0	-26.3	1.00 H	351	46.5	1.2
6	4924.00	26.6 AV	54.0	-27.4	1.00 H	351	25.4	1.2
7	7386.00	50.1 PK	74.0	-23.9	1.00 H	331	43.1	7.0
8	7386.00	36.5 AV	54.0	-17.5	1.00 H	331	29.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

