


RF Mode	802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.4 PK	74.0	-22.6	1.45 H	289	49.6	1.8
2	5460.00	40.8 AV	54.0	-13.2	1.45 H	289	39.0	1.8
3	#5470.00	62.2 PK	68.2	-6.0	1.45 H	289	60.4	1.8
4	*5510.00	98.4 PK			1.45 H	289	96.7	1.7
5	*5510.00	88.0 AV			1.45 H	289	86.3	1.7
6	11020.00	52.0 PK	74.0	-22.0	1.55 H	278	39.6	12.4
7	11020.00	41.6 AV	54.0	-12.4	1.55 H	278	29.2	12.4
8	#16530.00	46.1 PK	68.2	-22.1	1.34 H	273	32.2	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

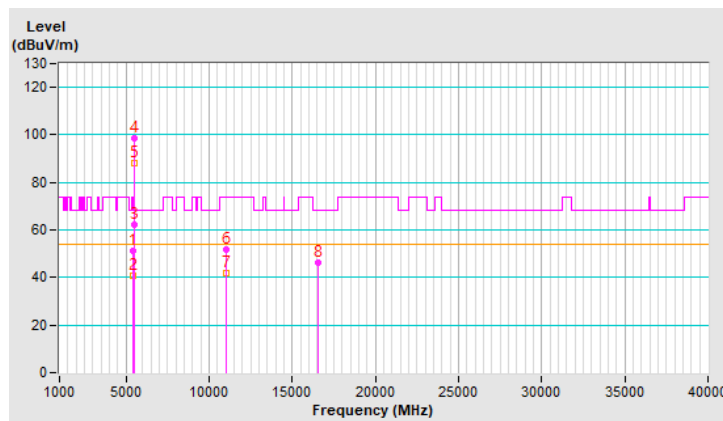


RF Mode	802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.2 PK	74.0	-15.8	1.25 V	266	56.4	1.8
2	5460.00	45.4 AV	54.0	-8.6	1.25 V	266	43.6	1.8
3	#5470.00	67.0 PK	68.2	-1.2	1.25 V	266	65.2	1.8
4	*5510.00	107.5 PK			1.25 V	266	105.8	1.7
5	*5510.00	96.7 AV			1.25 V	266	95.0	1.7
6	11020.00	50.8 PK	74.0	-23.2	1.18 V	242	38.4	12.4
7	11020.00	40.2 AV	54.0	-13.8	1.18 V	242	27.8	12.4
8	#16530.00	41.2 PK	68.2	-27.0	1.39 V	264	27.3	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

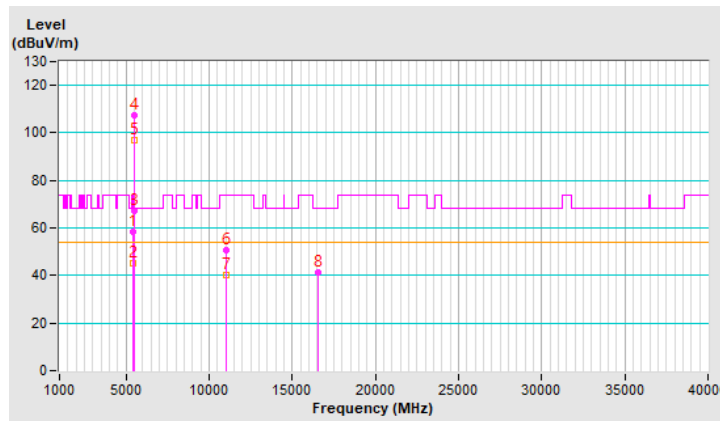


RF Mode	802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	101.4 PK			1.44 H	279	99.6	1.8
2	*5550.00	91.0 AV			1.44 H	279	89.2	1.8
3	11100.00	51.2 PK	74.0	-22.8	1.67 H	274	39.0	12.2
4	11100.00	41.3 AV	54.0	-12.7	1.67 H	274	29.1	12.2
5	#16650.00	46.8 PK	68.2	-21.4	1.43 H	300	32.0	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

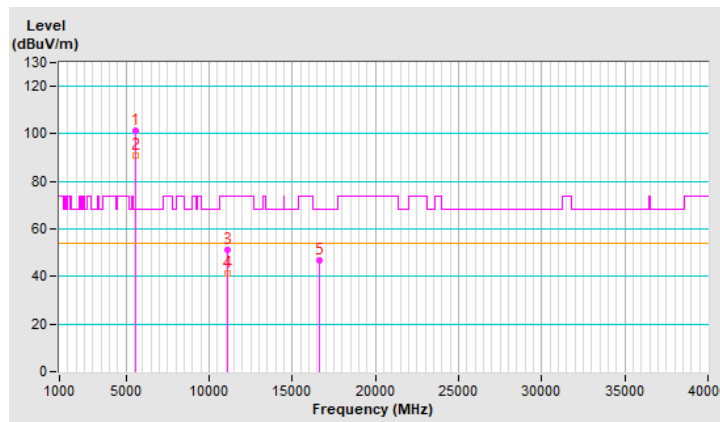


RF Mode	802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	111.2 PK			1.30 V	260	109.4	1.8
2	*5550.00	101.0 AV			1.30 V	260	99.2	1.8
3	11100.00	51.9 PK	74.0	-22.1	1.69 V	247	39.7	12.2
4	11100.00	40.7 AV	54.0	-13.3	1.69 V	247	28.5	12.2
5	#16650.00	43.6 PK	68.2	-24.6	1.11 V	198	28.8	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

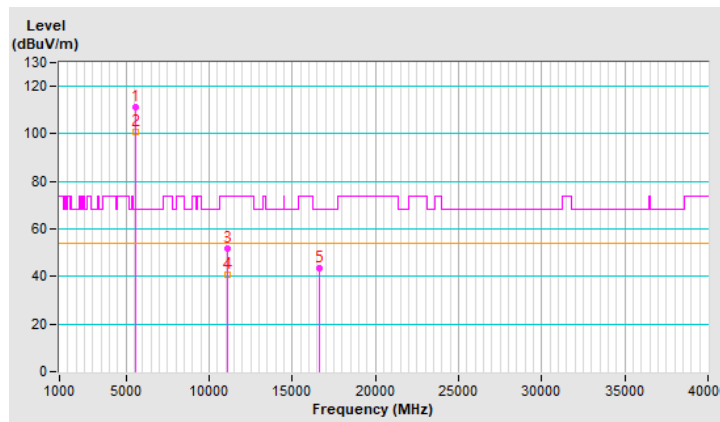


RF Mode	802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	101.2 PK			1.33 H	295	99.3	1.9
2	*5670.00	91.1 AV			1.33 H	295	89.2	1.9
3	#5725.00	62.8 PK	68.2	-5.4	1.33 H	295	60.7	2.1
4	11340.00	52.8 PK	74.0	-21.2	1.51 H	288	40.3	12.5
5	11340.00	43.3 AV	54.0	-10.7	1.51 H	288	30.8	12.5
6	#17010.00	46.8 PK	68.2	-21.4	1.25 H	250	30.5	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

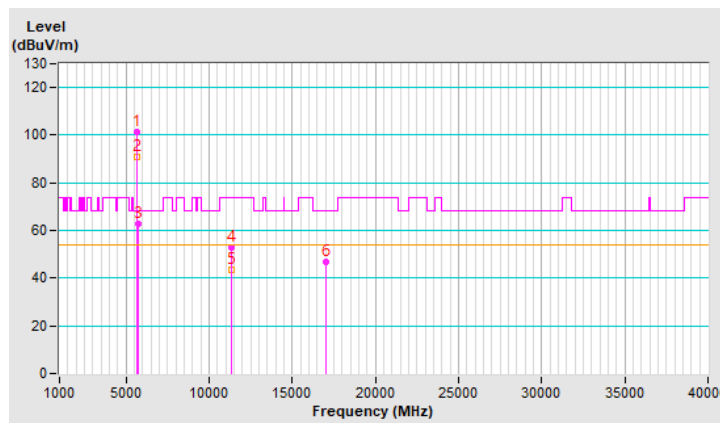


RF Mode	802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	109.9 PK			1.28 V	244	108.0	1.9
2	*5670.00	98.1 AV			1.28 V	244	96.2	1.9
3	#5725.00	66.4 PK	68.2	-1.8	1.28 V	244	64.3	2.1
4	11340.00	51.4 PK	74.0	-22.6	1.24 V	258	38.9	12.5
5	11340.00	40.6 AV	54.0	-13.4	1.24 V	258	28.1	12.5
6	#17010.00	42.6 PK	68.2	-25.6	1.47 V	220	26.3	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

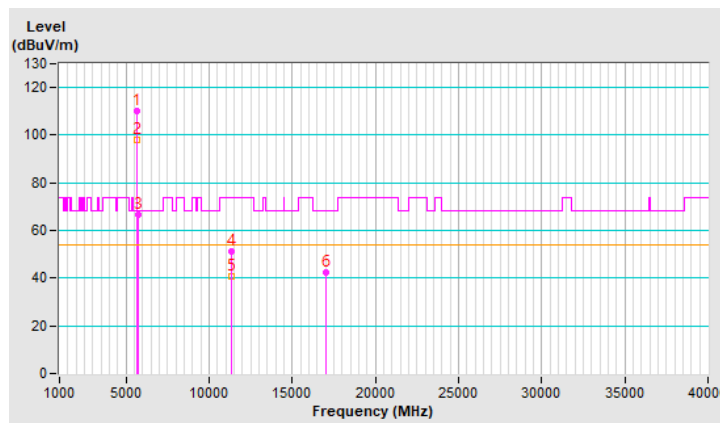


RF Mode	802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.1 PK	74.0	-23.9	1.48 H	258	48.3	1.8
2	5460.00	39.8 AV	54.0	-14.2	1.48 H	258	38.0	1.8
3	#5470.00	48.5 PK	68.2	-19.7	1.48 H	258	46.7	1.8
4	*5710.00	100.5 PK			1.48 H	258	98.5	2.0
5	*5710.00	90.4 AV			1.48 H	258	88.4	2.0
6	#5850.00	49.7 PK	68.2	-18.5	1.48 H	258	47.4	2.3
7	11420.00	52.7 PK	74.0	-21.3	1.51 H	277	40.0	12.7
8	11420.00	43.1 AV	54.0	-10.9	1.51 H	277	30.4	12.7
9	#17130.00	46.8 PK	68.2	-21.4	1.31 H	261	30.5	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

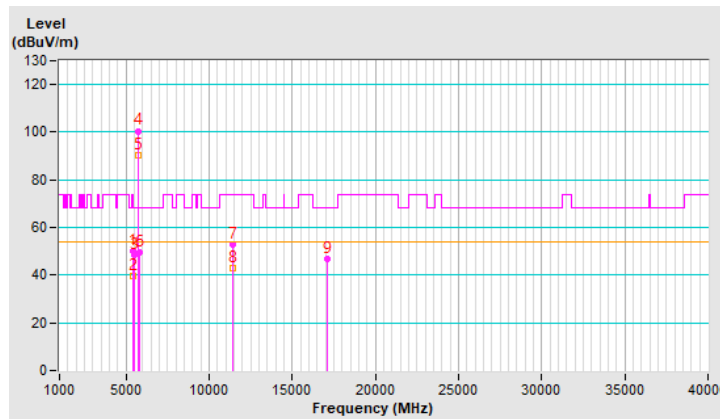


RF Mode	802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.3 PK	74.0	-21.7	1.28 V	250	50.5	1.8
2	5460.00	41.0 AV	54.0	-13.0	1.28 V	250	39.2	1.8
3	#5470.00	51.3 PK	68.2	-16.9	1.28 V	250	49.5	1.8
4	*5710.00	110.1 PK			1.28 V	250	108.1	2.0
5	*5710.00	100.3 AV			1.28 V	250	98.3	2.0
6	#5850.00	51.4 PK	68.2	-16.8	1.28 V	250	49.1	2.3
7	11420.00	51.8 PK	74.0	-22.2	1.22 V	190	39.1	12.7
8	11420.00	41.0 AV	54.0	-13.0	1.22 V	190	28.3	12.7
9	#17130.00	43.8 PK	68.2	-24.4	1.29 V	235	27.5	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

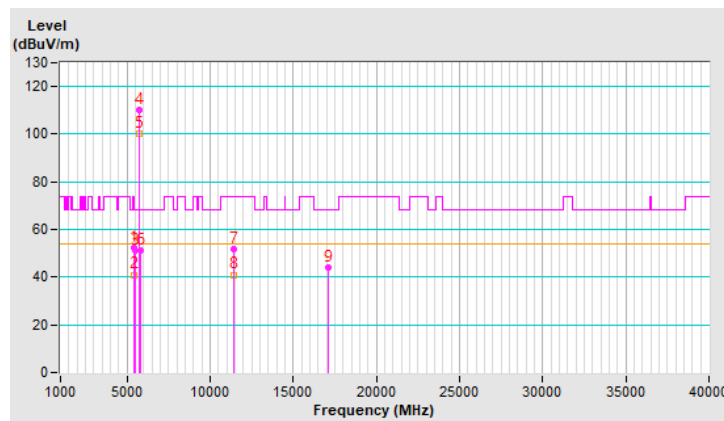


RF Mode	802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.30	50.7 PK	68.2	-17.5	1.55 H	230	48.8	1.9
2	*5755.00	101.8 PK			1.55 H	230	99.7	2.1
3	*5755.00	92.5 AV			1.55 H	230	90.4	2.1
4	#5937.33	52.6 PK	68.2	-15.6	1.55 H	230	50.1	2.5
5	11510.00	52.6 PK	74.0	-21.4	1.57 H	282	39.8	12.8
6	11510.00	42.9 AV	54.0	-11.1	1.57 H	282	30.1	12.8
7	#17265.00	47.3 PK	68.2	-20.9	1.27 H	214	30.7	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

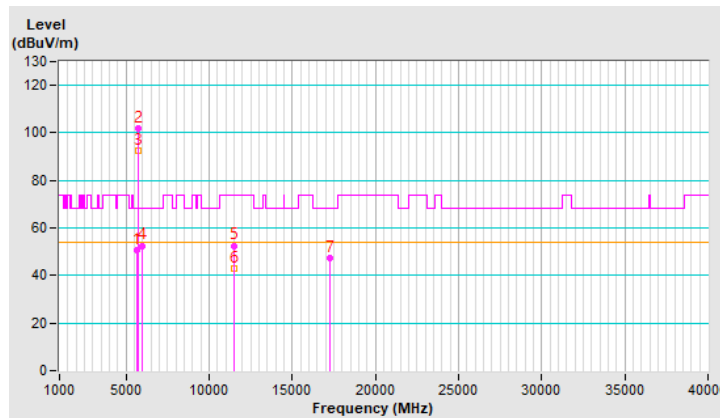


RF Mode	802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5643.20	61.4 PK	68.2	-6.8	1.24 V	254	59.1	2.3
2	*5755.00	112.0 PK			1.24 V	254	109.6	2.4
3	*5755.00	101.9 AV			1.24 V	254	99.5	2.4
4	#5935.10	52.4 PK	68.2	-15.8	1.24 V	254	49.5	2.9
5	11510.00	52.4 PK	74.0	-21.6	1.19 V	223	40.0	12.4
6	11510.00	41.8 AV	54.0	-12.2	1.19 V	223	29.4	12.4
7	#17265.00	45.5 PK	68.2	-22.7	1.29 V	280	28.8	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

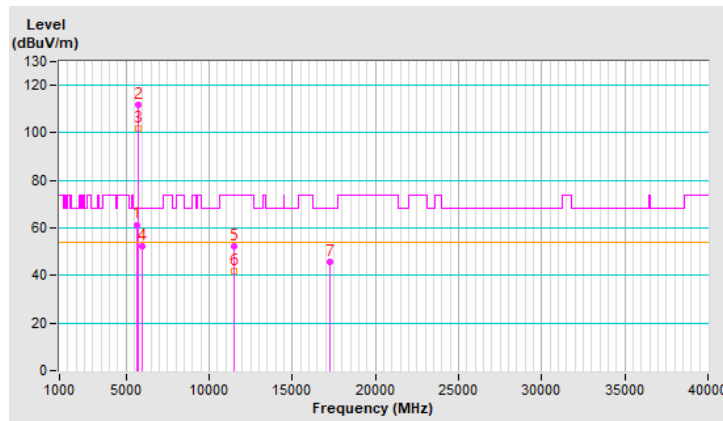


RF Mode	802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5630.37	51.7 PK	68.2	-16.5	1.52 H	265	49.8	1.9
2	*5795.00	101.1 PK			1.52 H	265	98.8	2.3
3	*5795.00	91.2 AV			1.52 H	265	88.9	2.3
4	#5934.52	59.1 PK	68.2	-9.1	1.52 H	265	56.6	2.5
5	11590.00	52.3 PK	74.0	-21.7	1.62 H	262	39.6	12.7
6	11590.00	43.0 AV	54.0	-11.0	1.62 H	262	30.3	12.7
7	#17385.00	46.9 PK	68.2	-21.3	1.28 H	192	29.3	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

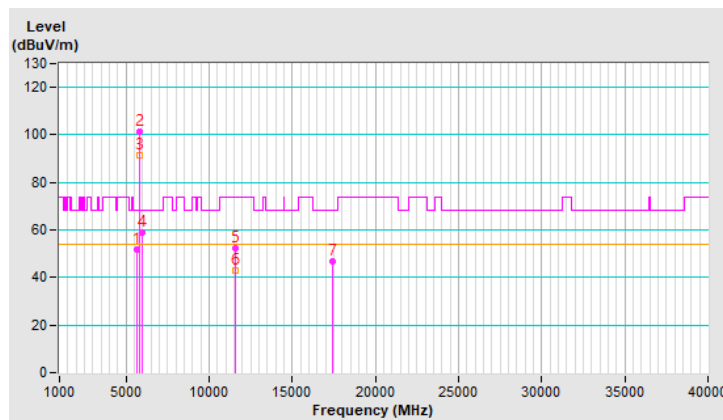


RF Mode	802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5632.40	54.5 PK	68.2	-13.7	1.29 V	278	52.2	2.3
2	*5795.00	112.0 PK			1.29 V	278	109.4	2.6
3	*5795.00	101.4 AV			1.29 V	278	98.8	2.6
4	#5939.50	61.4 PK	68.2	-6.8	1.29 V	278	58.5	2.9
5	11590.00	52.4 PK	74.0	-21.6	1.31 V	219	40.2	12.2
6	11590.00	42.4 AV	54.0	-11.6	1.31 V	219	30.2	12.2
7	#17385.00	43.6 PK	68.2	-24.6	1.32 V	217	26.0	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

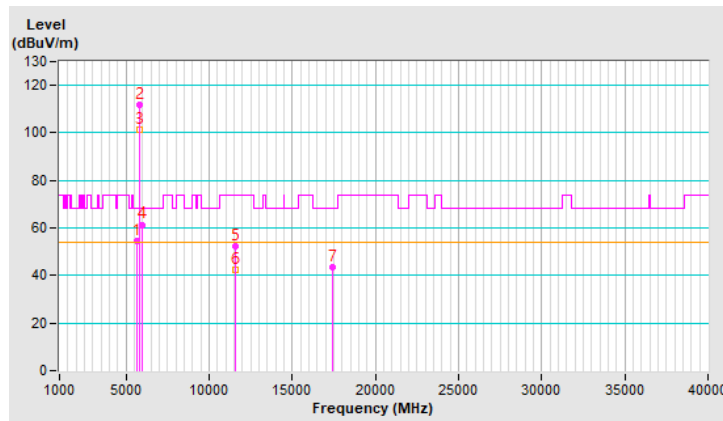


RF Mode	802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.7 PK	74.0	-13.3	1.53 H	335	58.7	2.0
2	5150.00	48.8 AV	54.0	-5.2	1.53 H	335	46.8	2.0
3	*5210.00	98.2 PK			1.53 H	335	96.4	1.8
4	*5210.00	87.5 AV			1.53 H	335	85.7	1.8
5	5350.00	51.1 PK	74.0	-22.9	1.53 H	335	49.4	1.7
6	5350.00	39.4 AV	54.0	-14.6	1.53 H	335	37.7	1.7
7	#10420.00	53.0 PK	68.2	-15.2	1.55 H	299	41.1	11.9
8	15630.00	46.8 PK	74.0	-27.2	1.29 H	279	35.1	11.7
9	15630.00	35.9 AV	54.0	-18.1	1.29 H	279	24.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

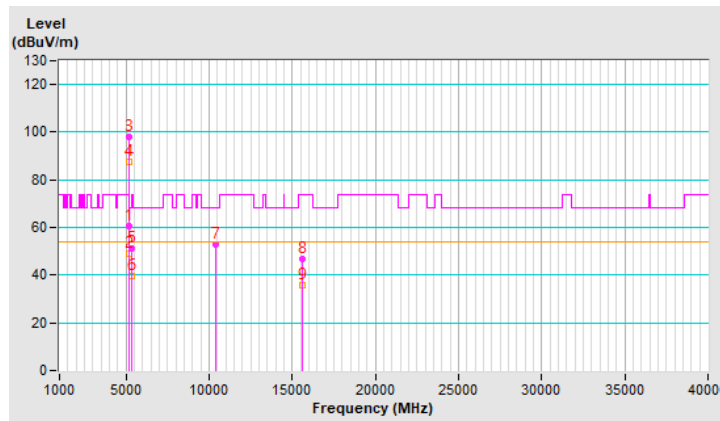


RF Mode	802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.6 PK	74.0	-10.4	1.33 V	230	61.6	2.0
2	5150.00	52.0 AV	54.0	-2.0	1.33 V	230	50.0	2.0
3	*5210.00	104.2 PK			1.33 V	230	102.4	1.8
4	*5210.00	94.4 AV			1.33 V	230	92.6	1.8
5	5350.00	52.6 PK	74.0	-21.4	1.33 V	230	50.9	1.7
6	5350.00	40.3 AV	54.0	-13.7	1.33 V	230	38.6	1.7
7	#10420.00	47.3 PK	68.2	-20.9	1.12 V	268	35.4	11.9
8	15630.00	40.2 PK	74.0	-33.8	1.23 V	274	28.5	11.7
9	15630.00	30.3 AV	54.0	-23.7	1.23 V	274	18.6	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

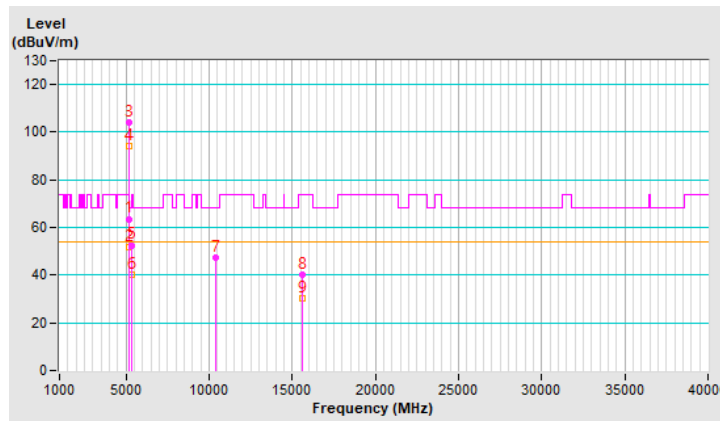


RF Mode	802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.8 PK	74.0	-23.2	1.64 H	267	48.8	2.0
2	5150.00	41.1 AV	54.0	-12.9	1.64 H	267	39.1	2.0
3	*5290.00	96.5 PK			1.64 H	267	95.0	1.5
4	*5290.00	83.4 AV			1.64 H	267	81.9	1.5
5	5350.00	60.7 PK	74.0	-13.3	1.64 H	267	59.0	1.7
6	5350.00	47.0 AV	54.0	-7.0	1.64 H	267	45.3	1.7
7	#10580.00	52.0 PK	68.2	-16.2	1.49 H	319	40.3	11.7
8	15870.00	47.7 PK	74.0	-26.3	1.38 H	216	36.7	11.0
9	15870.00	36.8 AV	54.0	-17.2	1.38 H	216	25.8	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

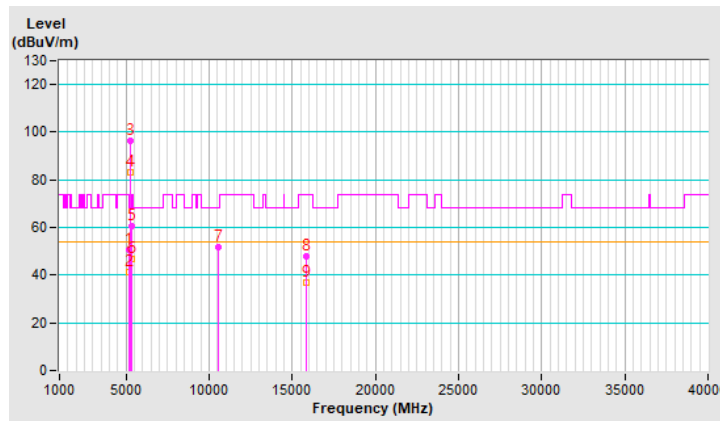


RF Mode	802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.5 PK	74.0	-20.5	1.18 V	201	51.5	2.0
2	5150.00	40.9 AV	54.0	-13.1	1.18 V	201	38.9	2.0
3	*5290.00	102.8 PK			1.18 V	201	101.3	1.5
4	*5290.00	92.0 AV			1.18 V	201	90.5	1.5
5	5350.00	63.0 PK	74.0	-11.0	1.18 V	201	61.3	1.7
6	5350.00	51.7 AV	54.0	-2.3	1.18 V	201	50.0	1.7
7	#10580.00	48.8 PK	68.2	-19.4	1.22 V	219	37.1	11.7
8	15870.00	38.9 PK	74.0	-35.1	1.11 V	254	27.9	11.0
9	15870.00	29.5 AV	54.0	-24.5	1.11 V	254	18.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

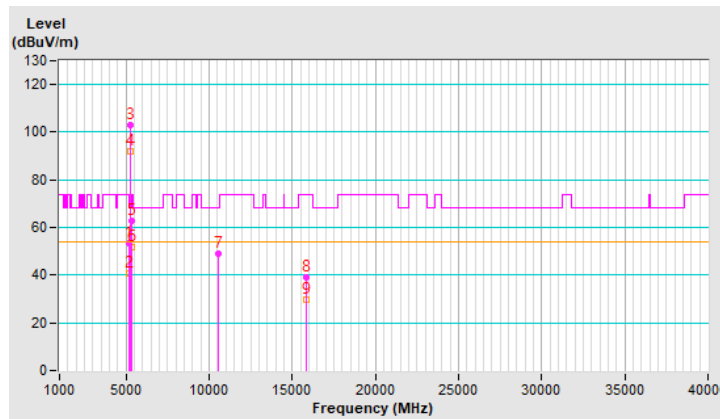


RF Mode	802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.5 PK	74.0	-12.5	1.45 H	315	59.7	1.8
2	5460.00	48.3 AV	54.0	-5.7	1.45 H	315	46.5	1.8
3	#5470.00	63.8 PK	68.2	-4.4	1.45 H	315	62.0	1.8
4	*5530.00	104.3 PK			1.45 H	315	102.6	1.7
5	*5530.00	92.9 AV			1.45 H	315	91.2	1.7
6	#5725.00	48.3 PK	68.2	-19.9	1.45 H	315	46.2	2.1
7	11060.00	51.9 PK	74.0	-22.1	1.60 H	299	39.6	12.3
8	11060.00	42.3 AV	54.0	-11.7	1.60 H	299	30.0	12.3
9	#16590.00	45.6 PK	68.2	-22.6	1.37 H	247	31.1	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

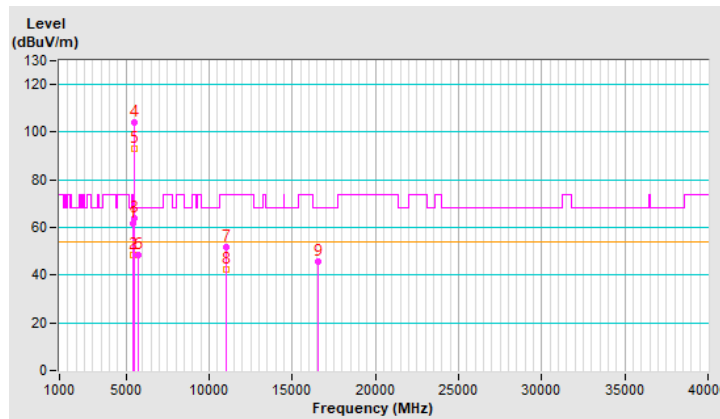


RF Mode	802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.1 PK	74.0	-8.9	1.33 V	271	63.3	1.8
2	5460.00	52.0 AV	54.0	-2.0	1.33 V	271	50.2	1.8
3	#5470.00	67.9 PK	68.2	-0.3	1.33 V	271	66.1	1.8
4	*5530.00	101.4 PK			1.33 V	271	99.7	1.7
5	*5530.00	90.9 AV			1.33 V	271	89.2	1.7
6	#5725.00	52.2 PK	68.2	-16.0	1.33 V	271	50.1	2.1
7	11060.00	49.7 PK	74.0	-24.3	1.31 V	228	37.4	12.3
8	11060.00	39.0 AV	54.0	-15.0	1.31 V	228	26.7	12.3
9	#16590.00	40.5 PK	68.2	-27.7	1.24 V	186	26.0	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

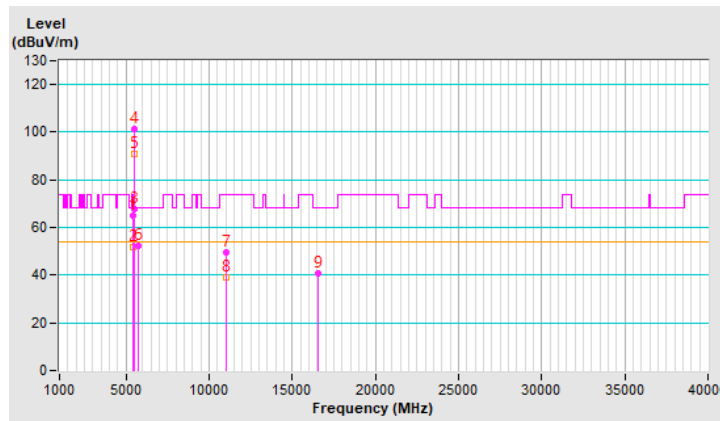


RF Mode	802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	99.1 PK			1.59 H	267	97.2	1.9
2	*5610.00	85.5 AV			1.59 H	267	83.6	1.9
3	#5725.00	61.3 PK	68.2	-6.9	1.59 H	267	59.2	2.1
4	11220.00	53.2 PK	74.0	-20.8	1.53 H	309	41.1	12.1
5	11220.00	42.8 AV	54.0	-11.2	1.53 H	309	30.7	12.1
6	#16830.00	44.7 PK	68.2	-23.5	1.44 H	299	29.2	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

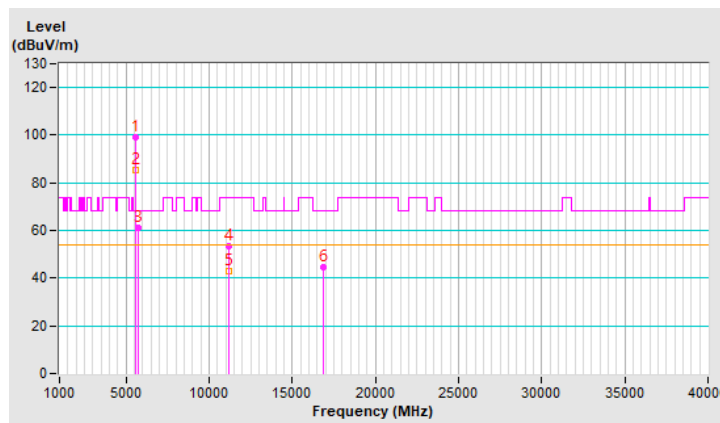


RF Mode	802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	105.3 PK			1.27 V	244	103.4	1.9
2	*5610.00	94.2 AV			1.27 V	244	92.3	1.9
3	#5725.00	66.4 PK	68.2	-1.8	1.27 V	244	64.3	2.1
4	11220.00	49.8 PK	74.0	-24.2	1.36 V	197	37.7	12.1
5	11220.00	40.1 AV	54.0	-13.9	1.36 V	197	28.0	12.1
6	#16830.00	41.3 PK	68.2	-26.9	1.32 V	229	25.8	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

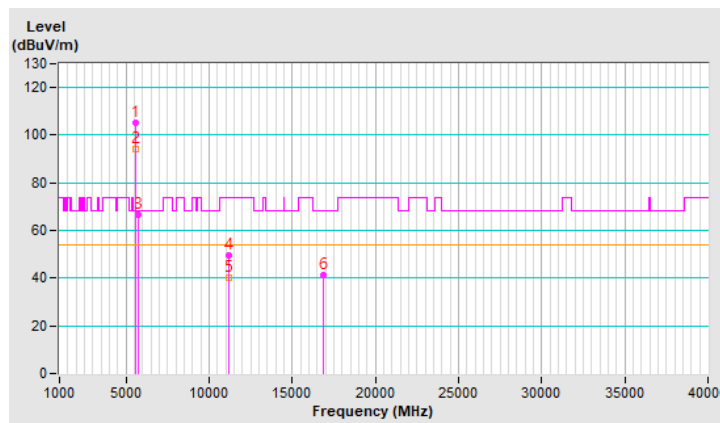


RF Mode	802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.1 PK	74.0	-24.9	1.39 H	268	47.3	1.8
2	5460.00	39.4 AV	54.0	-14.6	1.39 H	268	37.6	1.8
3	#5470.00	50.6 PK	68.2	-17.6	1.39 H	268	48.8	1.8
4	*5690.00	107.0 PK			1.39 H	268	105.0	2.0
5	*5690.00	95.2 AV			1.39 H	268	93.2	2.0
6	#5850.00	59.4 PK	68.2	-8.8	1.39 H	268	57.1	2.3
7	11380.00	52.7 PK	74.0	-21.3	1.58 H	265	40.0	12.7
8	11380.00	42.4 AV	54.0	-11.6	1.58 H	265	29.7	12.7
9	#17070.00	45.7 PK	68.2	-22.5	1.28 H	284	29.4	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

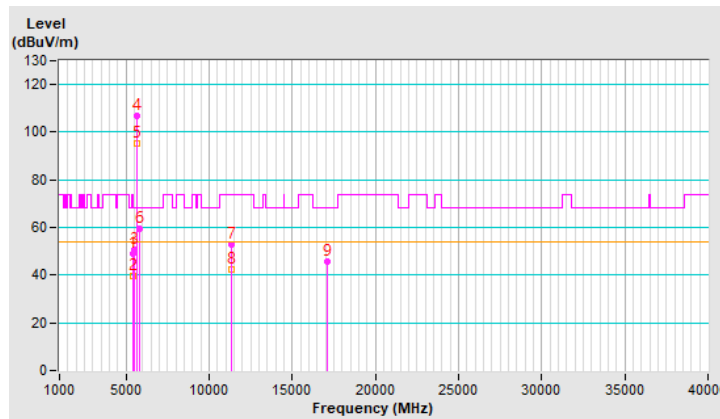


RF Mode	802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.1 PK	74.0	-19.9	1.25 V	250	52.3	1.8
2	5460.00	40.5 AV	54.0	-13.5	1.25 V	250	38.7	1.8
3	#5470.00	56.7 PK	68.2	-11.5	1.25 V	250	54.9	1.8
4	*5690.00	107.8 PK			1.25 V	250	105.8	2.0
5	*5690.00	95.5 AV			1.25 V	250	93.5	2.0
6	#5850.00	67.2 PK	68.2	-1.0	1.25 V	250	64.9	2.3
7	11380.00	50.1 PK	74.0	-23.9	2.12 V	266	37.4	12.7
8	11380.00	40.5 AV	54.0	-13.5	2.12 V	266	27.8	12.7
9	#17070.00	43.0 PK	68.2	-25.2	1.24 V	239	26.7	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

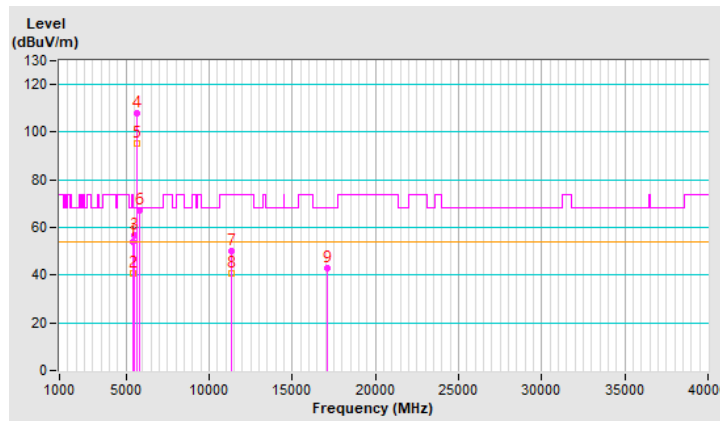


RF Mode	802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.36	58.7 PK	68.2	-9.5	1.50 H	277	56.7	2.0
2	*5775.00	100.2 PK			1.50 H	277	98.0	2.2
3	*5775.00	89.5 AV			1.50 H	277	87.3	2.2
4	#5928.69	55.3 PK	68.2	-12.9	1.50 H	277	52.8	2.5
5	11550.00	51.9 PK	74.0	-22.1	1.65 H	255	39.2	12.7
6	11550.00	42.7 AV	54.0	-11.3	1.65 H	255	30.0	12.7
7	#17325.00	46.9 PK	68.2	-21.3	1.49 H	265	29.9	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

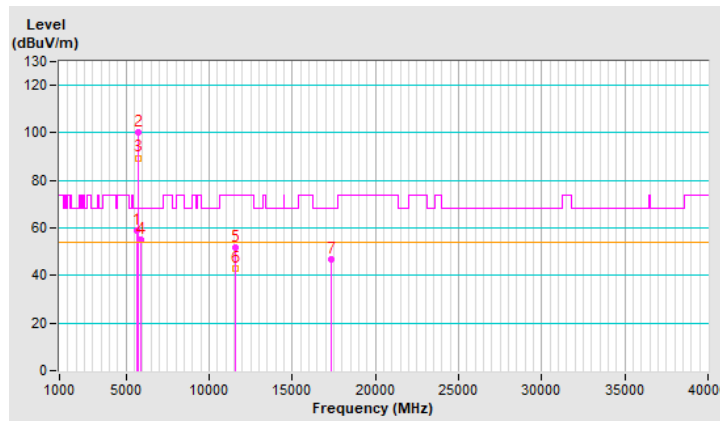


RF Mode	802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.20	66.5 PK	68.2	-1.7	1.25 V	250	64.5	2.0
2	*5775.00	104.9 PK			1.25 V	250	102.7	2.2
3	*5775.00	95.9 AV			1.25 V	250	93.7	2.2
4	#5927.52	65.2 PK	68.2	-3.0	1.25 V	250	62.7	2.5
5	11550.00	51.4 PK	74.0	-22.6	1.29 V	209	38.7	12.7
6	11550.00	40.7 AV	54.0	-13.3	1.29 V	209	28.0	12.7
7	#17325.00	41.7 PK	68.2	-26.5	1.27 V	252	24.7	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

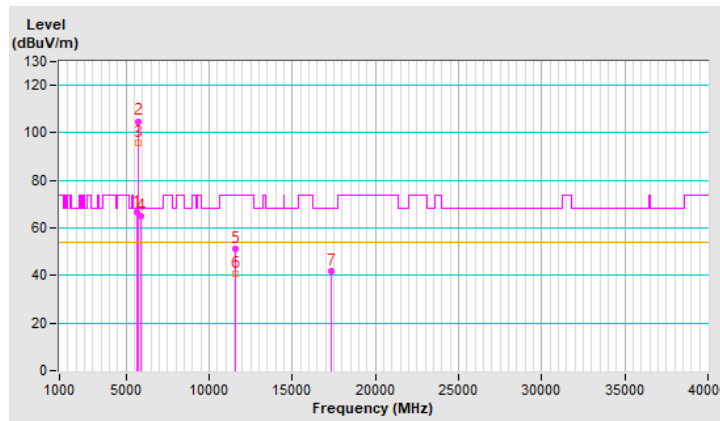


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.1 PK	74.0	-20.9	1.51 H	360	51.1	2.0
2	5150.00	37.3 AV	54.0	-16.7	1.51 H	360	35.3	2.0
3	*5180.00	107.5 PK			1.51 H	360	105.6	1.9
4	*5180.00	98.6 AV			1.51 H	360	96.7	1.9
5	#10360.00	66.1 PK	68.2	-2.1	2.21 H	21	54.5	11.6
6	15540.00	48.6 PK	74.0	-25.4	3.84 H	259	36.8	11.8
7	15540.00	35.2 AV	54.0	-18.8	3.84 H	259	23.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

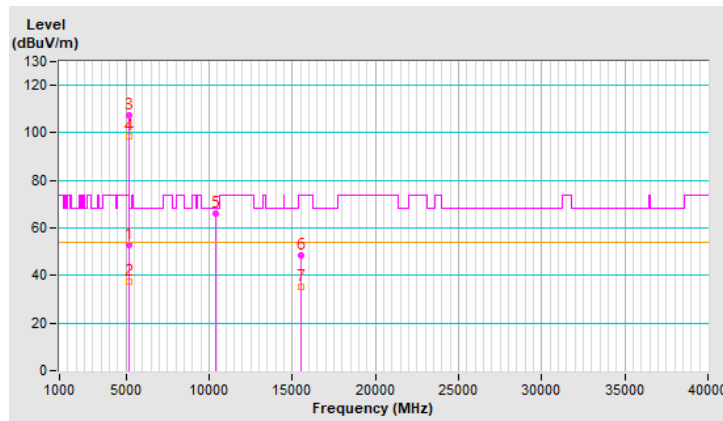


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.1 PK	74.0	-20.9	1.47 V	306	51.1	2.0
2	5150.00	41.7 AV	54.0	-12.3	1.47 V	306	39.7	2.0
3	*5180.00	115.4 PK			1.47 V	306	113.5	1.9
4	*5180.00	106.4 AV			1.47 V	306	104.5	1.9
5	#10360.00	65.7 PK	68.2	-2.5	2.91 V	17	54.1	11.6
6	15540.00	48.8 PK	74.0	-25.2	3.83 V	280	37.0	11.8
7	15540.00	35.6 AV	54.0	-18.4	3.83 V	280	23.8	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

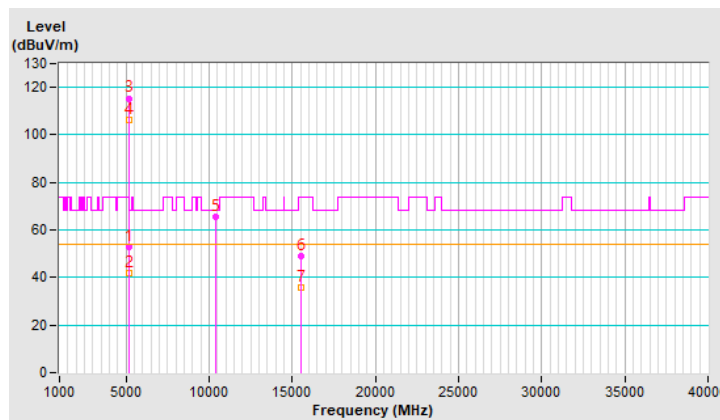


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.60	57.9 PK	74.0	-16.1	1.49 H	343	55.9	2.0
2	5120.60	40.7 AV	54.0	-13.3	1.49 H	343	38.7	2.0
3	*5200.00	109.8 PK			1.49 H	343	108.0	1.8
4	*5200.00	100.2 AV			1.49 H	343	98.4	1.8
5	5358.80	48.4 PK	74.0	-25.6	1.49 H	343	46.7	1.7
6	5358.80	37.9 AV	54.0	-16.1	1.49 H	343	36.2	1.7
7	#10400.00	54.7 PK	68.2	-13.5	1.88 H	327	42.9	11.8
8	15600.00	50.6 PK	74.0	-23.4	2.08 H	335	38.9	11.7
9	15600.00	37.2 AV	54.0	-16.8	2.08 H	335	25.5	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

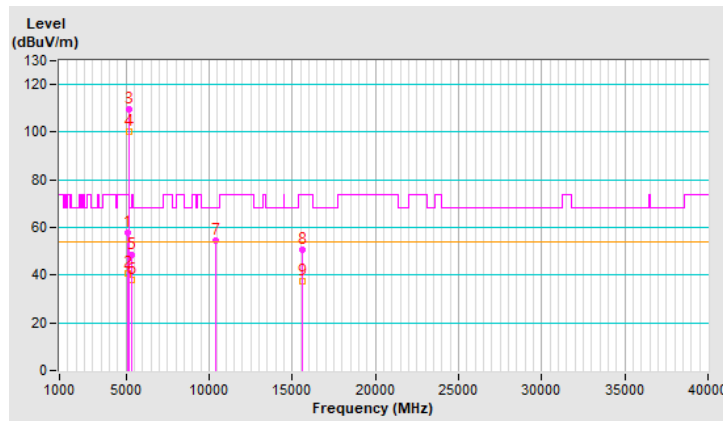


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5125.50	51.9 PK	74.0	-22.1	1.22 V	260	50.7	1.2
2	5125.50	43.6 AV	54.0	-10.4	1.22 V	260	42.4	1.2
3	*5200.00	116.7 PK			1.22 V	260	115.8	0.9
4	*5200.00	108.7 AV			1.22 V	260	107.8	0.9
5	5369.30	47.8 PK	74.0	-26.2	1.22 V	260	46.8	1.0
6	5369.30	37.4 AV	54.0	-16.6	1.22 V	260	36.4	1.0
7	#10400.00	64.9 PK	68.2	-3.3	1.47 V	360	53.5	11.4
8	15600.00	51.5 PK	74.0	-22.5	2.01 V	275	40.8	10.7
9	15600.00	37.6 AV	54.0	-16.4	2.01 V	275	26.9	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

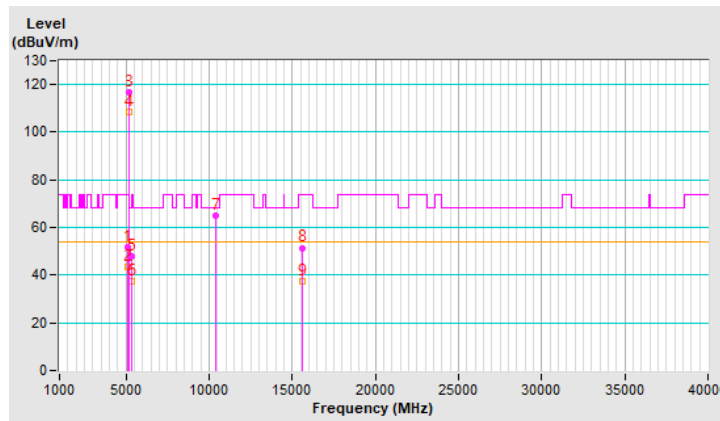


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	111.6 PK			1.55 H	296	109.9	1.7
2	*5240.00	102.6 AV			1.55 H	296	100.9	1.7
3	5401.00	57.2 PK	74.0	-16.8	1.55 H	296	55.6	1.6
4	5401.00	40.9 AV	54.0	-13.1	1.55 H	296	39.3	1.6
5	#10480.00	57.5 PK	68.2	-10.7	1.00 H	220	45.7	11.8
6	15720.00	50.0 PK	74.0	-24.0	2.00 H	304	38.4	11.6
7	15720.00	36.6 AV	54.0	-17.4	2.00 H	304	25.0	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

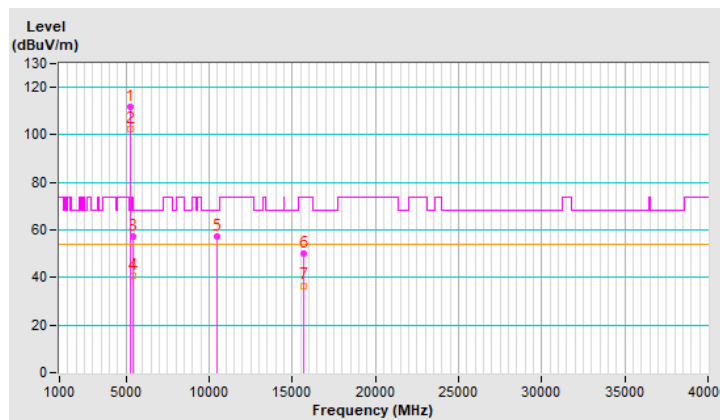


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	116.6 PK			1.37 V	246	114.9	1.7
2	*5240.00	108.5 AV			1.37 V	246	106.8	1.7
3	5401.00	49.5 PK	74.0	-24.5	1.37 V	246	47.9	1.6
4	5401.00	40.1 AV	54.0	-13.9	1.37 V	246	38.5	1.6
5	#10480.00	64.1 PK	68.2	-4.1	2.54 V	360	52.3	11.8
6	15720.00	51.4 PK	74.0	-22.6	2.07 V	221	39.8	11.6
7	15720.00	36.8 AV	54.0	-17.2	2.07 V	221	25.2	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

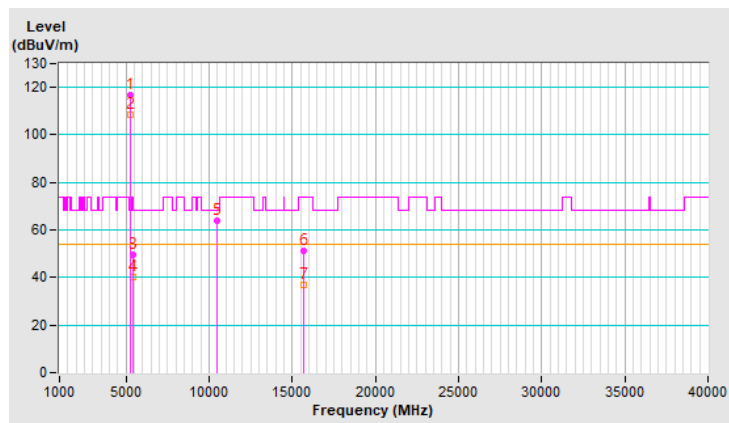


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.4 PK	74.0	-16.6	1.52 H	333	55.4	2.0
2	5150.00	40.9 AV	54.0	-13.1	1.52 H	333	38.9	2.0
3	*5260.00	111.8 PK			1.52 H	333	110.3	1.5
4	*5260.00	102.6 AV			1.52 H	333	101.1	1.5
5	5355.20	49.2 PK	74.0	-24.8	1.52 H	333	47.5	1.7
6	5355.20	39.4 AV	54.0	-14.6	1.52 H	333	37.7	1.7
7	#10520.00	56.6 PK	68.2	-11.6	1.24 H	216	44.9	11.7
8	15780.00	49.9 PK	74.0	-24.1	2.15 H	347	38.6	11.3
9	15780.00	37.2 AV	54.0	-16.8	2.15 H	347	25.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

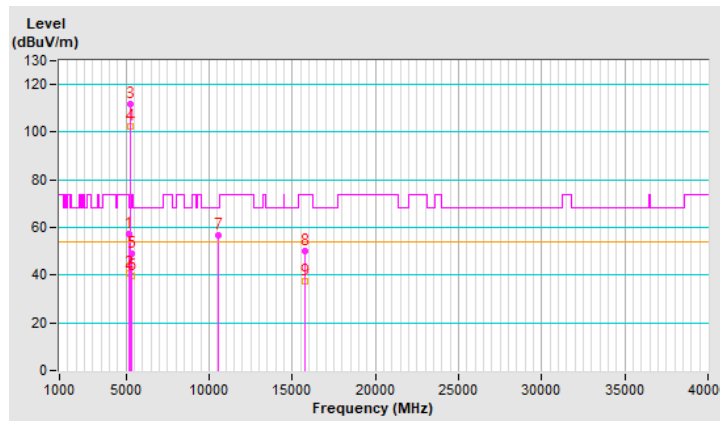


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5121.20	48.8 PK	74.0	-25.2	1.71 V	251	47.7	1.1
2	5121.20	37.6 AV	54.0	-16.4	1.71 V	251	36.5	1.1
3	*5260.00	117.3 PK			1.71 V	251	116.5	0.8
4	*5260.00	109.5 AV			1.71 V	251	108.7	0.8
5	#5325.10	49.7 PK	68.2	-18.5	1.71 V	251	48.8	0.9
6	#5325.10	39.6 AV	54.0	-14.4	1.71 V	251	38.7	0.9
7	#10520.00	65.7 PK	68.2	-2.5	2.62 V	360	54.3	11.4
8	15780.00	53.5 PK	74.0	-20.5	2.05 V	274	43.0	10.5
9	15780.00	38.3 AV	54.0	-15.7	2.05 V	274	27.8	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

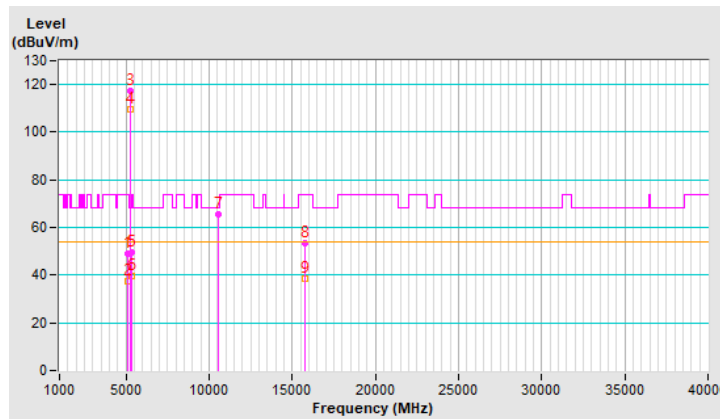


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5138.60	57.0 PK	74.0	-17.0	1.64 H	291	54.9	2.1
2	5138.60	40.6 AV	54.0	-13.4	1.64 H	291	38.5	2.1
3	*5300.00	111.4 PK			1.64 H	291	109.9	1.5
4	*5300.00	102.7 AV			1.64 H	291	101.2	1.5
5	5380.60	52.7 PK	74.0	-21.3	1.64 H	291	51.1	1.6
6	5380.60	45.3 AV	54.0	-8.7	1.64 H	291	43.7	1.6
7	10600.00	57.4 PK	74.0	-16.6	1.19 H	248	45.7	11.7
8	10600.00	44.3 AV	54.0	-9.7	1.19 H	248	32.6	11.7
9	15900.00	51.1 PK	74.0	-22.9	2.15 H	356	40.1	11.0
10	15900.00	36.9 AV	54.0	-17.1	2.15 H	356	25.9	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

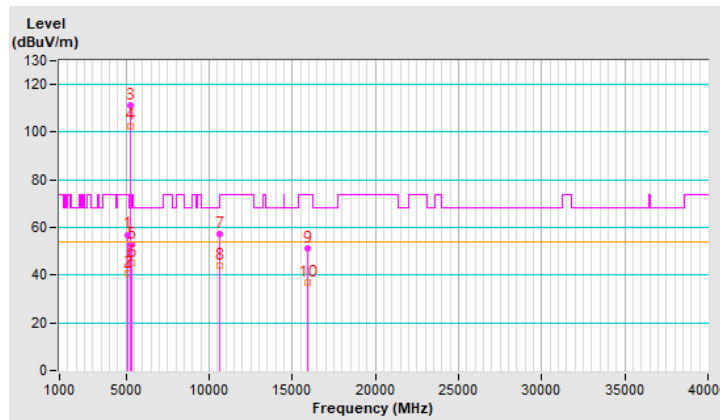


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5123.00	50.7 PK	74.0	-23.3	1.16 V	253	49.6	1.1
2	5123.00	39.4 AV	54.0	-14.6	1.16 V	253	38.3	1.1
3	*5300.00	117.3 PK			1.16 V	253	116.5	0.8
4	*5300.00	109.2 AV			1.16 V	253	108.4	0.8
5	5404.40	52.8 PK	74.0	-21.2	1.16 V	253	51.9	0.9
6	5404.40	45.7 AV	54.0	-8.3	1.16 V	253	44.8	0.9
7	10600.00	65.1 PK	74.0	-8.9	2.51 V	358	53.8	11.3
8	10600.00	51.9 AV	54.0	-2.1	2.51 V	358	40.6	11.3
9	15900.00	52.9 PK	74.0	-21.1	2.02 V	265	42.6	10.3
10	15900.00	37.8 AV	54.0	-16.2	2.02 V	265	27.5	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

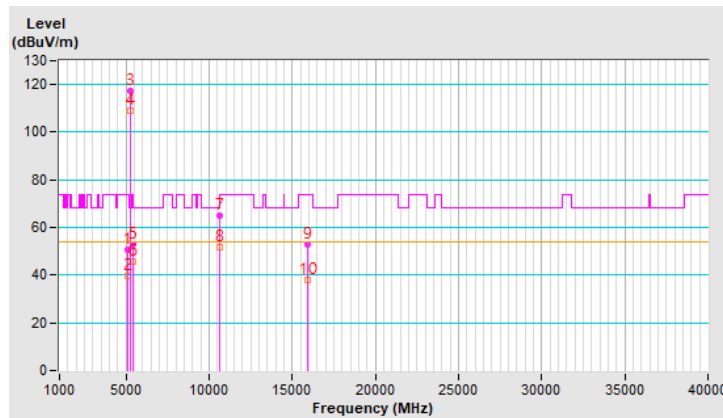


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	107.6 PK			1.49 H	297	106.0	1.6
2	*5320.00	100.5 AV			1.49 H	297	98.9	1.6
3	5350.00	56.6 PK	74.0	-17.4	1.49 H	297	54.9	1.7
4	5350.00	41.8 AV	54.0	-12.2	1.49 H	297	40.1	1.7
5	10640.00	58.0 PK	74.0	-16.0	1.02 H	228	46.3	11.7
6	10640.00	46.3 AV	54.0	-7.7	1.02 H	228	34.6	11.7
7	15960.00	51.1 PK	74.0	-22.9	3.60 H	223	39.8	11.3
8	15960.00	38.1 AV	54.0	-15.9	3.60 H	223	26.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

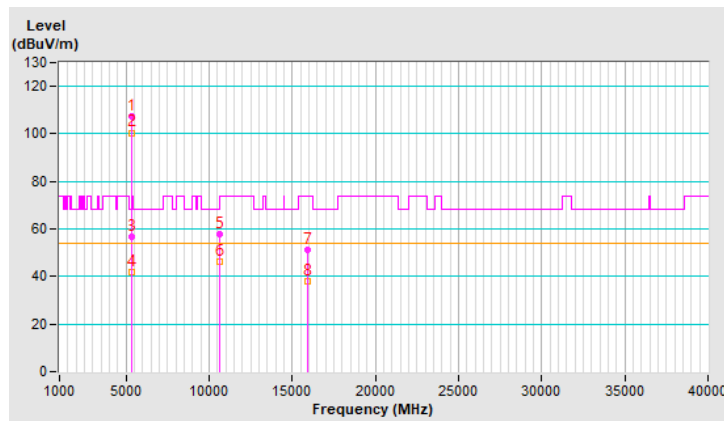


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.1 PK			1.32 V	268	116.5	1.6
2	*5320.00	108.8 AV			1.32 V	268	107.2	1.6
3	5350.00	56.1 PK	74.0	-17.9	1.32 V	268	54.4	1.7
4	5350.00	43.9 AV	54.0	-10.1	1.32 V	268	42.2	1.7
5	10640.00	65.8 PK	74.0	-8.2	2.62 V	360	54.1	11.7
6	10640.00	51.3 AV	54.0	-2.7	2.62 V	360	39.6	11.7
7	15960.00	50.8 PK	74.0	-23.2	3.92 V	336	39.5	11.3
8	15960.00	37.9 AV	54.0	-16.1	3.92 V	336	26.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

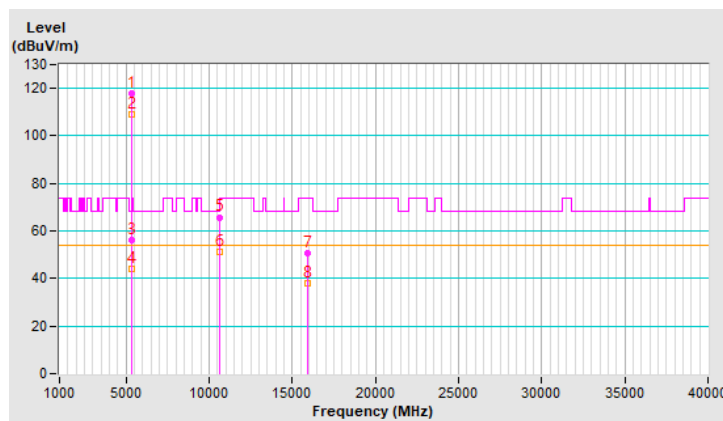


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.3 PK	74.0	-16.7	1.49 H	333	55.5	1.8
2	5460.00	37.4 AV	54.0	-16.6	1.49 H	333	35.6	1.8
3	#5470.00	57.5 PK	68.2	-10.7	1.49 H	333	55.7	1.8
4	*5500.00	111.0 PK			1.49 H	333	109.3	1.7
5	*5500.00	100.4 AV			1.49 H	333	98.7	1.7
6	11000.00	60.2 PK	74.0	-13.8	2.18 H	10	47.8	12.4
7	11000.00	49.5 AV	54.0	-4.5	2.18 H	10	37.1	12.4
8	#16500.00	54.4 PK	68.2	-13.8	3.82 H	267	40.7	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

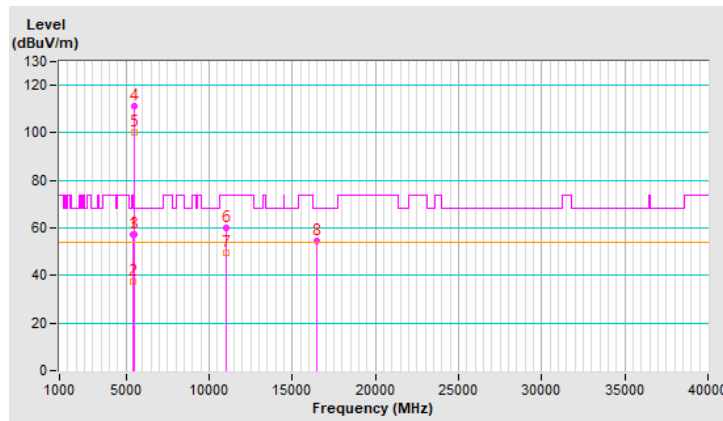


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.2 PK	74.0	-10.8	1.60 V	274	61.4	1.8
2	5460.00	42.5 AV	54.0	-11.5	1.60 V	274	40.7	1.8
3	#5470.00	64.0 PK	68.2	-4.2	1.60 V	274	62.2	1.8
4	*5500.00	117.7 PK			1.60 V	274	116.0	1.7
5	*5500.00	107.5 AV			1.60 V	274	105.8	1.7
6	11000.00	59.9 PK	74.0	-14.1	3.33 V	199	47.5	12.4
7	11000.00	50.9 AV	54.0	-3.1	3.33 V	199	38.5	12.4
8	#16500.00	53.9 PK	68.2	-14.3	4.00 V	360	40.2	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

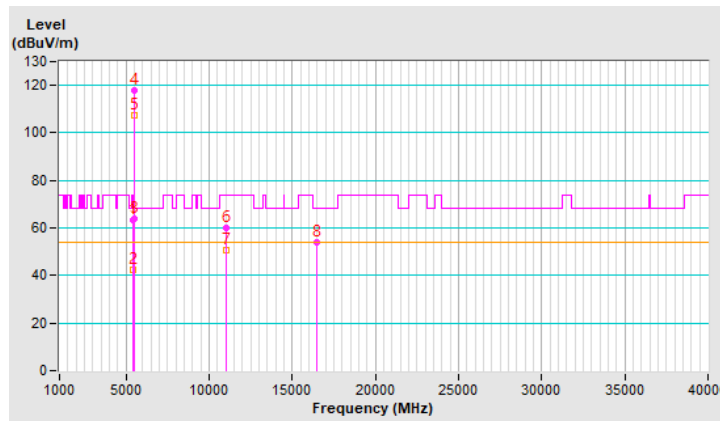


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5419.10	43.6 PK	74.0	-30.4	1.35 H	353	41.9	1.7
2	5419.10	38.3 AV	54.0	-15.7	1.35 H	353	36.6	1.7
3	*5580.00	110.9 PK			1.35 H	353	109.1	1.8
4	*5580.00	99.9 AV			1.35 H	353	98.1	1.8
5	#5779.10	50.1 PK	68.2	-18.1	1.35 H	353	47.9	2.2
6	11160.00	58.5 PK	74.0	-15.5	2.28 H	272	46.5	12.0
7	11160.00	46.2 AV	54.0	-7.8	2.28 H	272	34.2	12.0
8	#16740.00	49.5 PK	68.2	-18.7	3.81 H	263	34.3	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

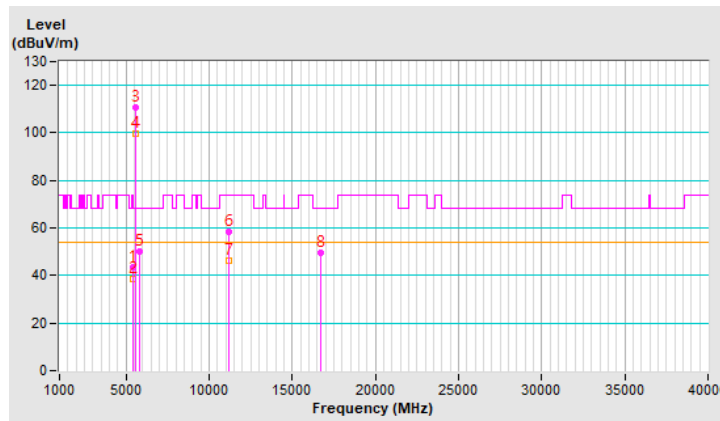


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5414.00	50.7 PK	74.0	-23.3	1.55 V	233	49.9	0.8
2	5414.00	39.3 AV	54.0	-14.7	1.55 V	233	38.5	0.8
3	*5580.00	116.7 PK			1.55 V	233	115.6	1.1
4	*5580.00	107.9 AV			1.55 V	233	106.8	1.1
5	#5786.40	50.0 PK	68.2	-18.2	1.55 V	233	48.4	1.6
6	11160.00	62.2 PK	74.0	-11.8	2.69 V	306	50.8	11.4
7	11160.00	50.2 AV	54.0	-3.8	2.69 V	306	38.8	11.4
8	#16740.00	48.7 PK	68.2	-19.5	4.00 V	360	34.8	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

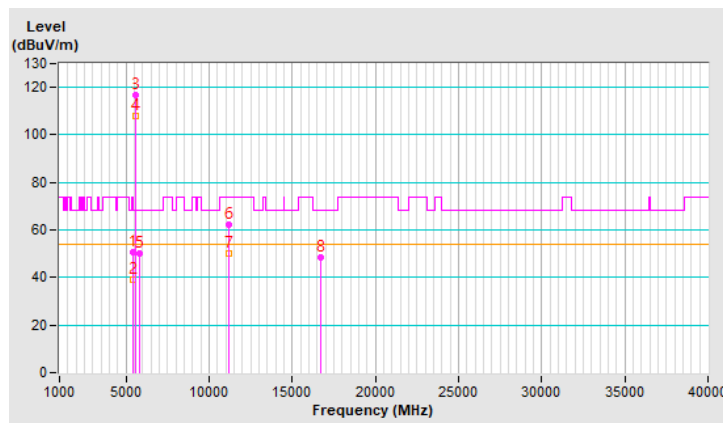


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.2 PK			1.41 H	360	110.2	2.0
2	*5700.00	102.1 AV			1.41 H	360	100.1	2.0
3	#5725.00	61.9 PK	68.2	-6.3	1.41 H	360	59.8	2.1
4	11400.00	56.7 PK	74.0	-17.3	2.09 H	281	44.0	12.7
5	11400.00	44.7 AV	54.0	-9.3	2.09 H	281	32.0	12.7
6	#17100.00	45.7 PK	68.2	-22.5	3.83 H	247	29.4	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

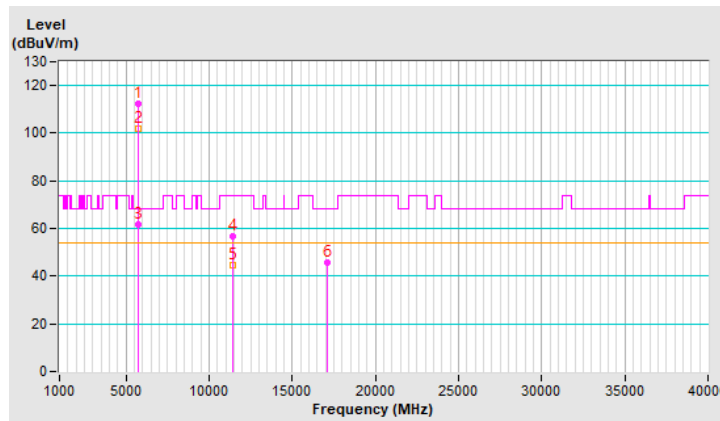


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.2 PK			1.70 V	262	111.2	2.0
2	*5700.00	103.8 AV			1.70 V	262	101.8	2.0
3	#5725.00	63.0 PK	68.2	-5.2	1.70 V	262	60.9	2.1
4	11400.00	63.5 PK	74.0	-10.5	2.50 V	300	50.8	12.7
5	11400.00	50.2 AV	54.0	-3.8	2.50 V	300	37.5	12.7
6	#17100.00	49.1 PK	68.2	-19.1	3.76 V	353	32.8	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

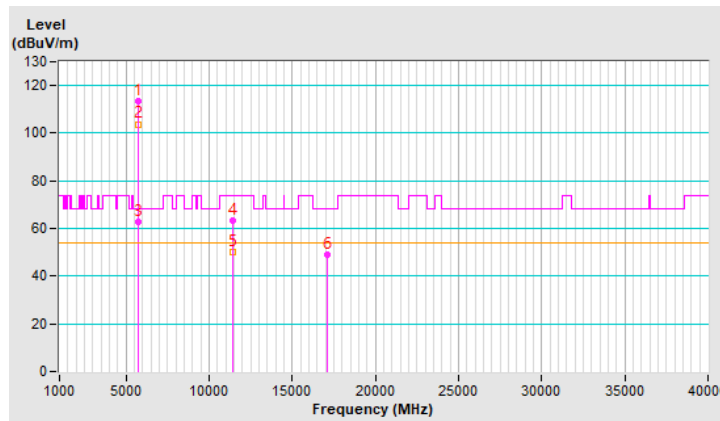


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	47.0 PK	74.0	-27.0	1.23 H	136	45.2	1.8
2	5460.00	36.2 AV	54.0	-17.8	1.23 H	136	34.4	1.8
3	#5470.00	45.9 PK	68.2	-22.3	1.23 H	136	44.1	1.8
4	*5720.00	108.5 PK			1.23 H	136	106.4	2.1
5	*5720.00	101.3 AV			1.23 H	136	99.2	2.1
6	#5850.00	45.1 PK	68.2	-23.1	1.23 H	136	42.8	2.3
7	11440.00	62.3 PK	74.0	-11.7	2.17 H	314	49.6	12.7
8	11440.00	45.3 AV	54.0	-8.7	2.17 H	314	32.6	12.7
9	#17160.00	49.9 PK	68.2	-18.3	3.68 H	261	33.6	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

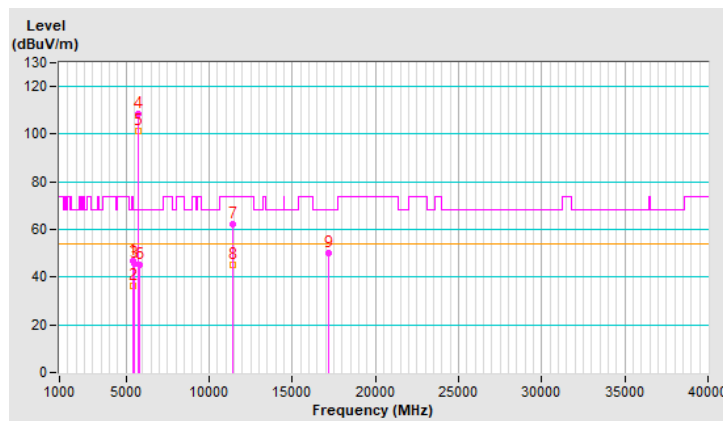


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	48.1 PK	74.0	-25.9	1.55 V	203	46.3	1.8
2	5460.00	37.3 AV	54.0	-16.7	1.55 V	203	35.5	1.8
3	#5470.00	46.6 PK	68.2	-21.6	1.55 V	203	44.8	1.8
4	*5720.00	116.3 PK			1.55 V	203	114.2	2.1
5	*5720.00	106.4 AV			1.55 V	203	104.3	2.1
6	#5850.00	48.5 PK	68.2	-19.7	1.55 V	203	46.2	2.3
7	11440.00	65.3 PK	74.0	-8.7	3.89 V	360	52.6	12.7
8	11440.00	48.8 AV	54.0	-5.2	3.89 V	360	36.1	12.7
9	#17160.00	52.8 PK	68.2	-15.4	4.00 V	360	36.5	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

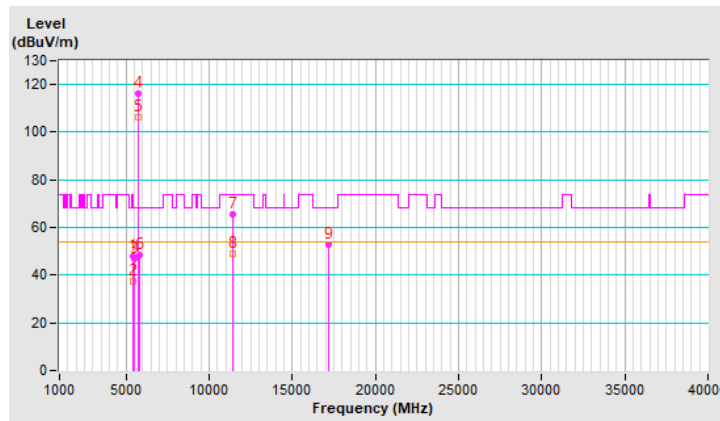


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5636.26	50.1 PK	68.2	-18.1	2.03 H	349	48.2	1.9
2	*5745.00	112.4 PK			2.03 H	349	110.3	2.1
3	*5745.00	102.8 AV			2.03 H	349	100.7	2.1
4	#5941.17	48.8 PK	68.2	-19.4	2.03 H	349	46.3	2.5
5	11490.00	62.9 PK	74.0	-11.1	2.36 H	34	50.1	12.8
6	11490.00	49.4 AV	54.0	-4.6	2.36 H	34	36.6	12.8
7	#17235.00	54.4 PK	68.2	-13.8	3.72 H	274	37.9	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

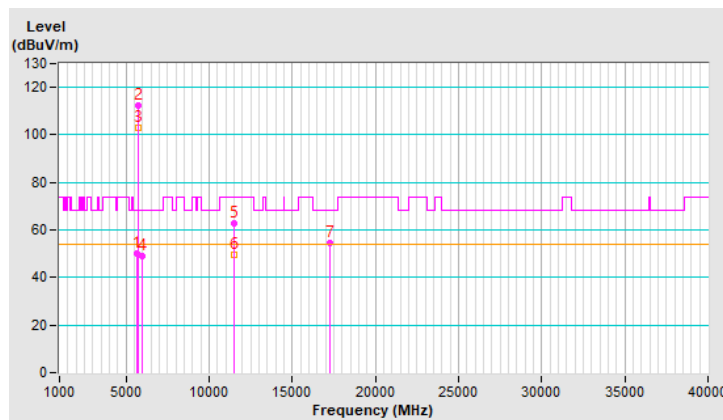


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5617.86	56.2 PK	68.2	-12.0	1.58 V	275	55.0	1.2
2	*5745.00	119.2 PK			1.58 V	275	117.7	1.5
3	*5745.00	111.3 AV			1.58 V	275	109.8	1.5
4	#5933.27	51.6 PK	68.2	-16.6	1.58 V	275	49.6	2.0
5	11490.00	66.6 PK	74.0	-7.4	4.00 V	336	54.7	11.9
6	11490.00	52.2 AV	54.0	-1.8	4.00 V	336	40.3	11.9
7	#17235.00	53.3 PK	68.2	-14.9	4.00 V	360	38.1	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

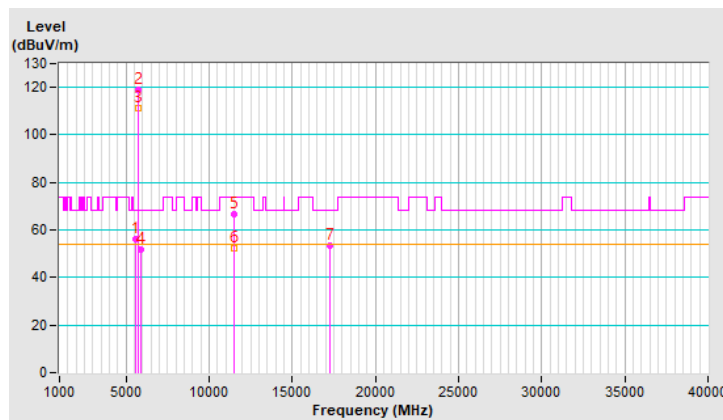


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.30	48.1 PK	68.2	-20.1	1.85 H	360	46.2	1.9
2	*5785.00	110.4 PK			1.85 H	360	108.2	2.2
3	*5785.00	101.2 AV			1.85 H	360	99.0	2.2
4	#5963.30	49.7 PK	68.2	-18.5	1.85 H	360	47.1	2.6
5	11570.00	63.5 PK	74.0	-10.5	2.20 H	324	50.8	12.7
6	11570.00	50.7 AV	54.0	-3.3	2.20 H	324	38.0	12.7
7	#17355.00	50.6 PK	68.2	-17.6	3.72 H	260	33.2	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

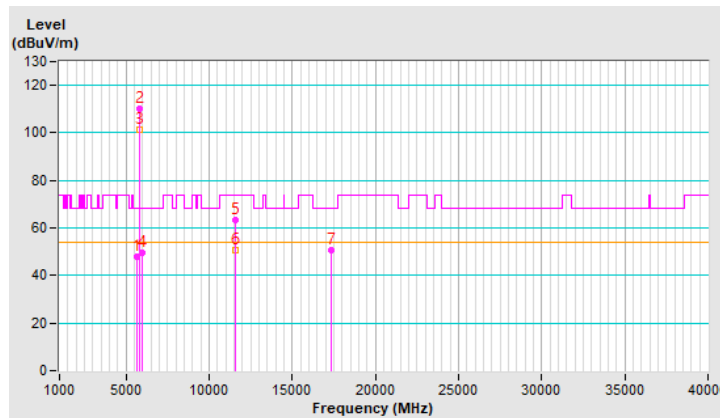


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5598.86	51.4 PK	68.2	-16.8	1.57 V	330	50.3	1.1
2	*5785.00	118.5 PK			1.57 V	330	116.9	1.6
3	*5785.00	107.9 AV			1.57 V	330	106.3	1.6
4	#5950.37	51.3 PK	68.2	-16.9	1.57 V	330	49.2	2.1
5	11570.00	65.4 PK	74.0	-8.6	3.99 V	169	53.5	11.9
6	11570.00	52.0 AV	54.0	-2.0	3.99 V	169	40.1	11.9
7	#17355.00	52.5 PK	68.2	-15.7	4.00 V	341	36.4	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

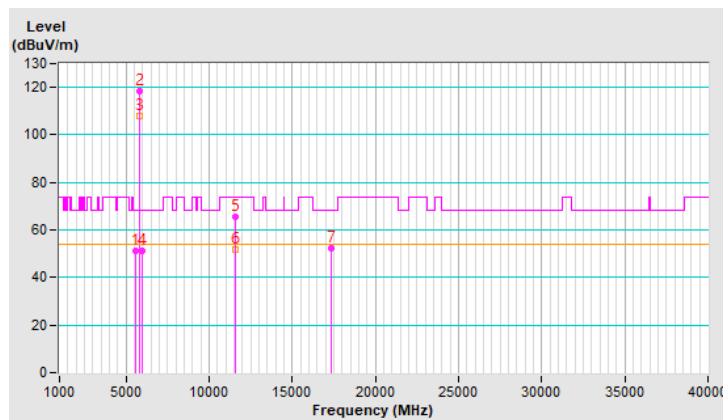


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.30	55.5 PK	68.2	-12.7	2.09 H	346	53.6	1.9
2	*5825.00	103.2 PK			2.09 H	346	100.9	2.3
3	*5825.00	92.6 AV			2.09 H	346	90.3	2.3
4	#5963.30	56.2 PK	68.2	-12.0	2.09 H	346	53.6	2.6
5	11650.00	61.1 PK	74.0	-12.9	2.21 H	29	48.6	12.5
6	11650.00	50.1 AV	54.0	-3.9	2.21 H	29	37.6	12.5
7	#17475.00	48.5 PK	68.2	-19.7	3.93 H	268	29.8	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

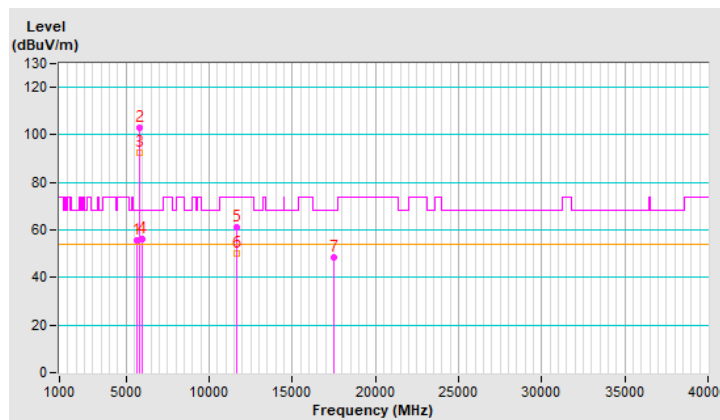


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.36	48.9 PK	68.2	-19.3	1.53 V	251	47.7	1.2
2	*5825.00	115.2 PK			1.53 V	251	113.4	1.8
3	*5825.00	106.0 AV			1.53 V	251	104.2	1.8
4	#5940.57	51.6 PK	68.2	-16.6	1.53 V	251	49.6	2.0
5	11650.00	62.0 PK	74.0	-12.0	3.99 V	220	50.3	11.7
6	11650.00	50.5 AV	54.0	-3.5	3.99 V	220	38.8	11.7
7	#17475.00	49.4 PK	68.2	-18.8	3.93 V	360	32.1	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

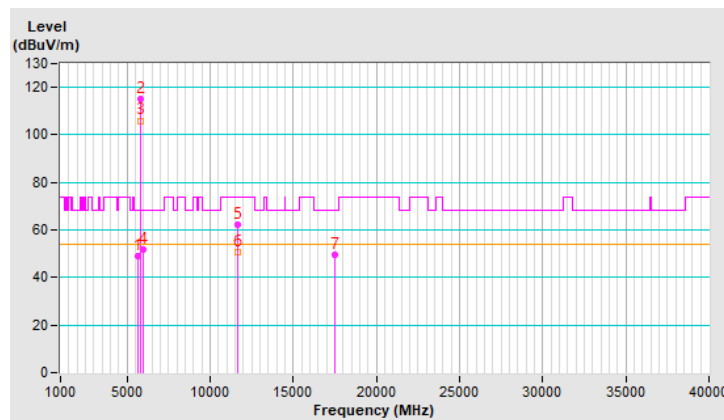


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.8 PK	74.0	-16.2	1.49 H	134	55.8	2.0
2	5150.00	43.7 AV	54.0	-10.3	1.49 H	134	41.7	2.0
3	*5180.00	104.2 PK			1.49 H	134	102.3	1.9
4	*5180.00	99.5 AV			1.49 H	134	97.6	1.9
5	#10360.00	62.6 PK	68.2	-5.6	3.03 H	343	51.0	11.6
6	15540.00	53.6 PK	74.0	-20.4	1.88 H	279	41.8	11.8
7	15540.00	36.5 AV	54.0	-17.5	1.88 H	279	24.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

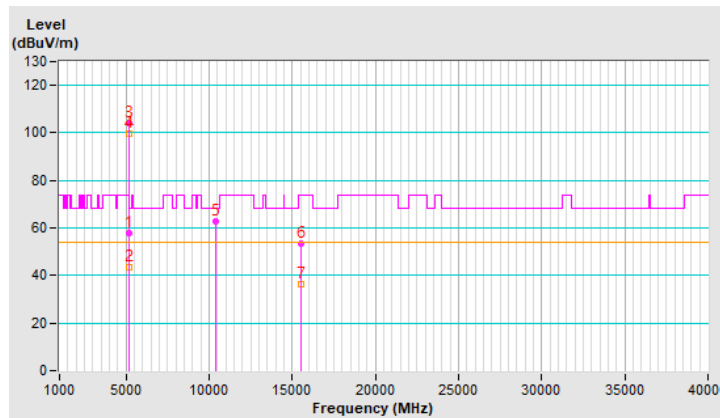


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.2 PK	74.0	-11.8	1.66 V	226	60.2	2.0
2	5150.00	41.4 AV	54.0	-12.6	1.66 V	226	39.4	2.0
3	*5180.00	112.1 PK			1.66 V	226	110.2	1.9
4	*5180.00	102.8 AV			1.66 V	226	100.9	1.9
5	#10360.00	65.0 PK	68.2	-3.2	3.37 V	358	53.4	11.6
6	15540.00	52.9 PK	74.0	-21.1	2.29 V	256	41.1	11.8
7	15540.00	36.5 AV	54.0	-17.5	2.29 V	256	24.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

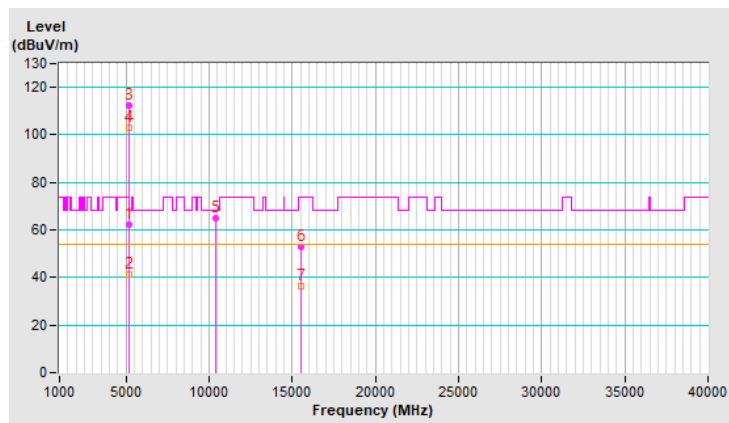


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.60	61.2 PK	74.0	-12.8	1.51 H	106	59.2	2.0
2	5120.60	40.8 AV	54.0	-13.2	1.51 H	106	38.8	2.0
3	*5200.00	105.1 PK			1.51 H	106	103.3	1.8
4	*5200.00	96.6 AV			1.51 H	106	94.8	1.8
5	5358.80	50.3 PK	74.0	-23.7	1.51 H	106	48.6	1.7
6	5358.80	39.4 AV	54.0	-14.6	1.51 H	106	37.7	1.7
7	#10400.00	65.0 PK	68.2	-3.2	3.04 H	348	53.2	11.8
8	15600.00	52.9 PK	74.0	-21.1	1.93 H	270	41.2	11.7
9	15600.00	39.8 AV	54.0	-14.2	1.93 H	270	28.1	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

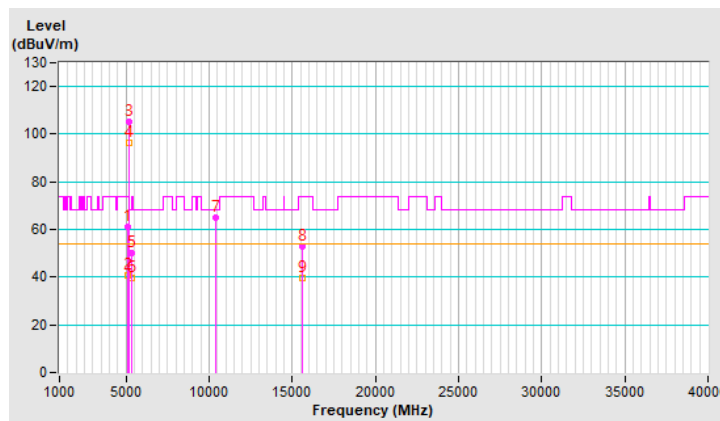


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5103.40	58.6 PK	74.0	-15.4	1.43 V	256	57.4	1.2
2	5103.40	42.4 AV	54.0	-11.6	1.43 V	256	41.2	1.2
3	*5200.00	116.3 PK			1.43 V	256	115.4	0.9
4	*5200.00	107.6 AV			1.43 V	256	106.7	0.9
5	5361.40	50.3 PK	74.0	-23.7	1.43 V	256	49.3	1.0
6	5361.40	39.5 AV	54.0	-14.5	1.43 V	256	38.5	1.0
7	#10400.00	64.3 PK	68.2	-3.9	1.69 V	330	52.9	11.4
8	15600.00	51.0 PK	74.0	-23.0	2.12 V	313	40.3	10.7
9	15600.00	37.8 AV	54.0	-16.2	2.12 V	313	27.1	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

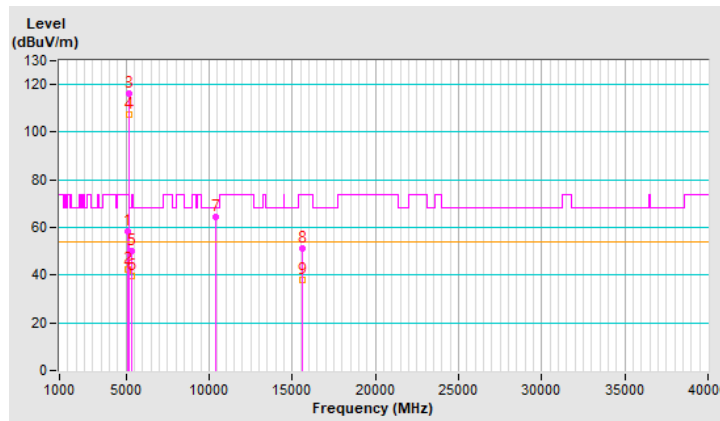


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5131.70	52.4 PK	74.0	-21.6	1.65 H	117	50.3	2.1
2	5131.70	36.8 AV	54.0	-17.2	1.65 H	117	34.7	2.1
3	*5240.00	104.1 PK			1.65 H	117	102.4	1.7
4	*5240.00	96.0 AV			1.65 H	117	94.3	1.7
5	5351.60	50.1 PK	74.0	-23.9	1.65 H	117	48.4	1.7
6	5351.60	38.1 AV	54.0	-15.9	1.65 H	117	36.4	1.7
7	#10480.00	65.7 PK	68.2	-2.5	2.99 H	338	53.9	11.8
8	15720.00	52.9 PK	74.0	-21.1	1.80 H	281	41.3	11.6
9	15720.00	39.8 AV	54.0	-14.2	1.80 H	281	28.2	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

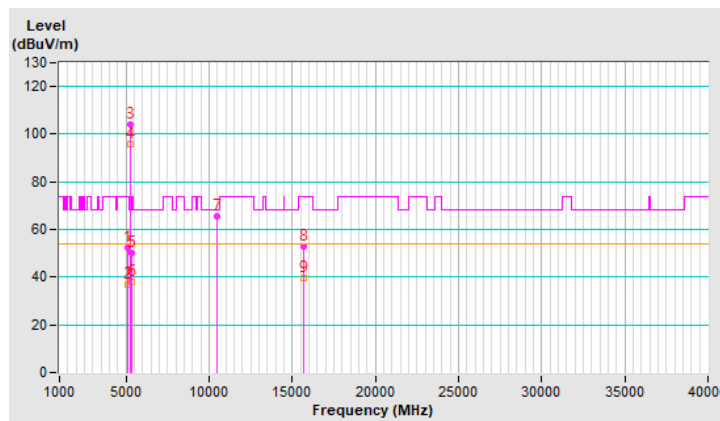


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5131.70	51.6 PK	74.0	-22.4	1.33 V	243	49.5	2.1
2	5131.70	39.9 AV	54.0	-14.1	1.33 V	243	37.8	2.1
3	*5240.00	117.7 PK			1.33 V	243	116.0	1.7
4	*5240.00	108.7 AV			1.33 V	243	107.0	1.7
5	5351.60	50.1 PK	74.0	-23.9	1.33 V	243	48.4	1.7
6	5351.60	38.3 AV	54.0	-15.7	1.33 V	243	36.6	1.7
7	#10480.00	65.3 PK	68.2	-2.9	1.48 V	350	53.5	11.8
8	15720.00	52.5 PK	74.0	-21.5	2.11 V	261	40.9	11.6
9	15720.00	39.3 AV	54.0	-14.7	2.11 V	261	27.7	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

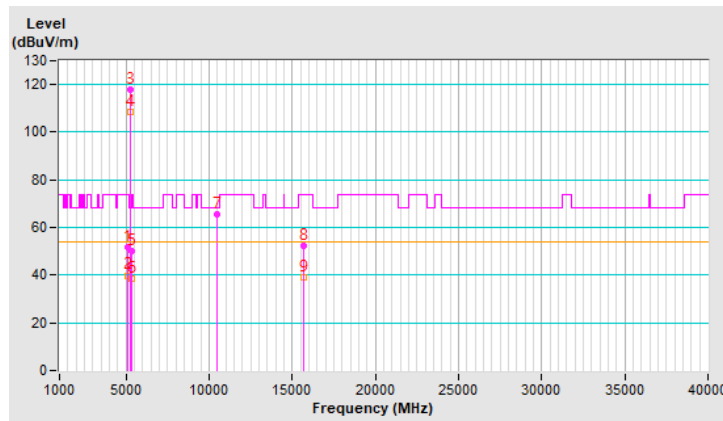


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.1 PK	74.0	-19.9	1.60 H	111	52.1	2.0
2	5150.00	37.9 AV	54.0	-16.1	1.60 H	111	35.9	2.0
3	*5260.00	106.3 PK			1.60 H	111	104.8	1.5
4	*5260.00	97.2 AV			1.60 H	111	95.7	1.5
5	5355.20	49.9 PK	74.0	-24.1	1.60 H	111	48.2	1.7
6	5355.20	38.9 AV	54.0	-15.1	1.60 H	111	37.2	1.7
7	#10520.00	64.2 PK	68.2	-4.0	3.10 H	360	52.5	11.7
8	15780.00	53.4 PK	74.0	-20.6	1.93 H	262	42.1	11.3
9	15780.00	39.8 AV	54.0	-14.2	1.93 H	262	28.5	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

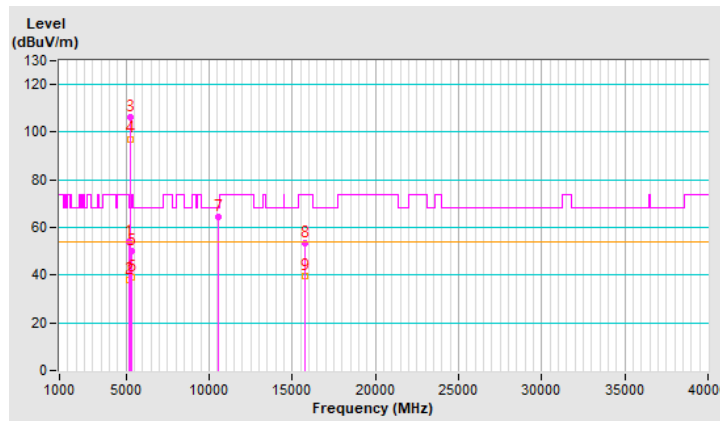


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.8 PK	74.0	-21.2	1.09 V	307	51.7	1.1
2	5150.00	40.7 AV	54.0	-13.3	1.09 V	307	39.6	1.1
3	*5260.00	117.5 PK			1.09 V	307	116.7	0.8
4	*5260.00	108.9 AV			1.09 V	307	108.1	0.8
5	5354.10	50.5 PK	74.0	-23.5	1.09 V	307	49.5	1.0
6	5354.10	39.2 AV	54.0	-14.8	1.09 V	307	38.2	1.0
7	#10520.00	64.3 PK	68.2	-3.9	1.46 V	335	52.9	11.4
8	15780.00	52.5 PK	74.0	-21.5	1.99 V	312	42.0	10.5
9	15780.00	38.8 AV	54.0	-15.2	1.99 V	312	28.3	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

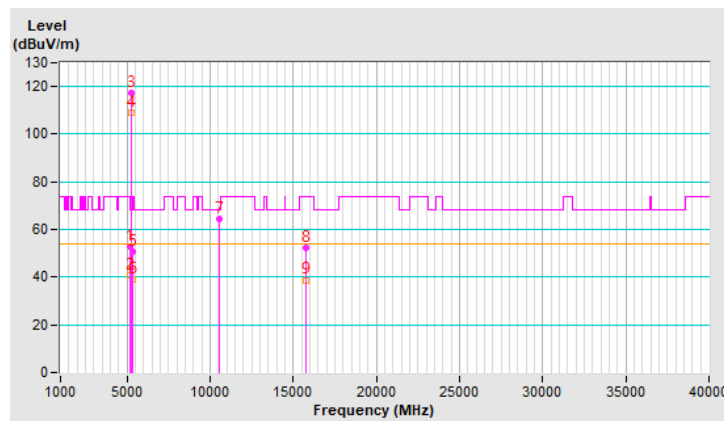


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5138.60	51.5 PK	74.0	-22.5	1.63 H	117	49.4	2.1
2	5138.60	37.3 AV	54.0	-16.7	1.63 H	117	35.2	2.1
3	*5300.00	107.2 PK			1.63 H	117	105.7	1.5
4	*5300.00	97.3 AV			1.63 H	117	95.8	1.5
5	5380.60	67.9 PK	74.0	-6.1	1.63 H	117	66.3	1.6
6	5380.60	48.4 AV	54.0	-5.6	1.63 H	117	46.8	1.6
7	10600.00	63.4 PK	74.0	-10.6	3.10 H	341	51.7	11.7
8	10600.00	50.9 AV	54.0	-3.1	3.10 H	341	39.2	11.7
9	15900.00	55.7 PK	74.0	-18.3	1.95 H	279	44.7	11.0
10	15900.00	44.1 AV	54.0	-9.9	1.95 H	279	33.1	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

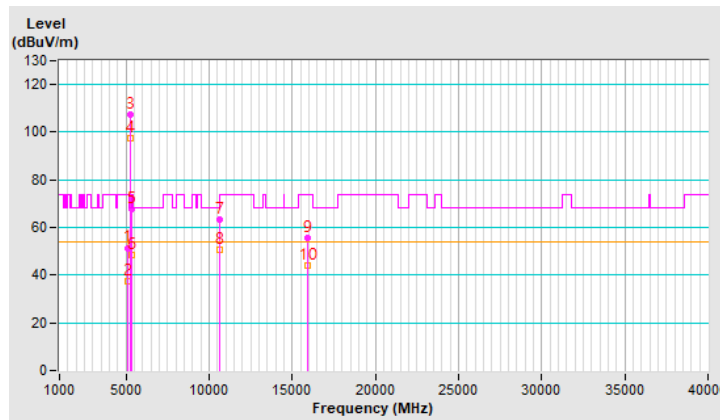


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5127.20	50.5 PK	74.0	-23.5	1.17 V	263	49.3	1.2
2	5127.20	40.8 AV	54.0	-13.2	1.17 V	263	39.6	1.2
3	*5300.00	118.5 PK			1.17 V	263	117.7	0.8
4	*5300.00	108.5 AV			1.17 V	263	107.7	0.8
5	5394.10	66.5 PK	74.0	-7.5	1.17 V	263	65.6	0.9
6	5394.10	47.1 AV	54.0	-6.9	1.17 V	263	46.2	0.9
7	10600.00	63.0 PK	74.0	-11.0	1.52 V	360	51.7	11.3
8	10600.00	51.2 AV	54.0	-2.8	1.52 V	360	39.9	11.3
9	15900.00	55.0 PK	74.0	-19.0	2.83 V	352	44.7	10.3
10	15900.00	43.5 AV	54.0	-10.5	2.83 V	352	33.2	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

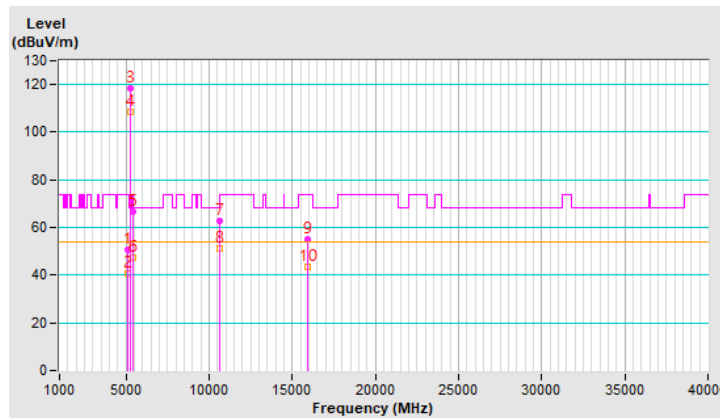

RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	105.1 PK			1.69 H	130	103.5	1.6
2	*5320.00	95.6 AV			1.69 H	130	94.0	1.6
3	5350.00	52.3 PK	74.0	-21.7	1.69 H	130	50.6	1.7
4	5350.00	38.3 AV	54.0	-15.7	1.69 H	130	36.6	1.7
5	10640.00	61.9 PK	74.0	-12.1	3.19 H	346	50.2	11.7
6	10640.00	49.9 AV	54.0	-4.1	3.19 H	346	38.2	11.7
7	15960.00	48.1 PK	74.0	-25.9	1.90 H	271	36.8	11.3
8	15960.00	35.4 AV	54.0	-18.6	1.90 H	271	24.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

