


RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5630.13	50.9 PK	68.2	-17.3	1.13 V	159	49.0	1.9
2	*5785.00	114.1 PK			1.13 V	159	111.9	2.2
3	*5785.00	104.0 AV			1.13 V	159	101.8	2.2
4	#5954.90	51.3 PK	68.2	-16.9	1.13 V	159	48.7	2.6
5	11570.00	55.5 PK	74.0	-18.5	1.00 V	159	42.8	12.7
6	11570.00	45.2 AV	54.0	-8.8	1.00 V	159	32.5	12.7
7	#17355.00	44.8 PK	68.2	-23.4	1.15 V	210	27.4	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

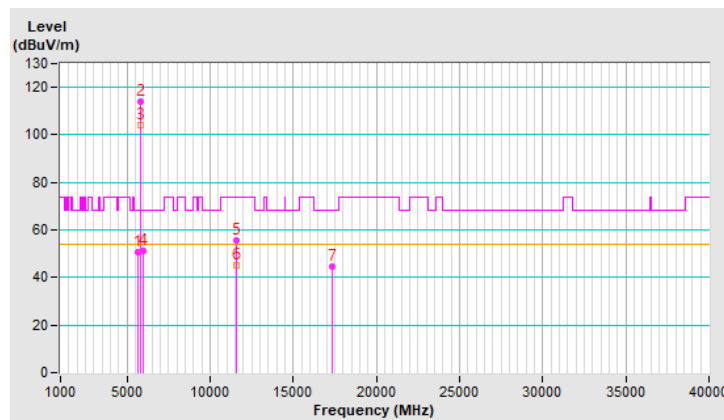


RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5614.80	51.4 PK	68.2	-16.8	2.03 H	285	49.5	1.9
2	*5825.00	113.5 PK			2.03 H	285	111.2	2.3
3	*5825.00	102.3 AV			2.03 H	285	100.0	2.3
4	#5926.66	61.1 PK	68.2	-7.1	2.03 H	285	58.6	2.5
5	11650.00	56.3 PK	74.0	-17.7	2.16 H	348	43.8	12.5
6	11650.00	46.1 AV	54.0	-7.9	2.16 H	348	33.6	12.5
7	#17475.00	45.3 PK	68.2	-22.9	2.69 H	343	26.6	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

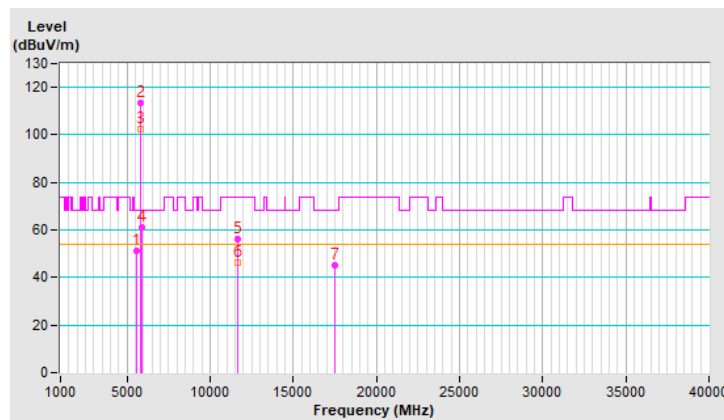


RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5615.51	53.0 PK	68.2	-15.2	1.12 V	184	51.1	1.9
2	*5825.00	113.6 PK			1.12 V	184	111.3	2.3
3	*5825.00	103.3 AV			1.12 V	184	101.0	2.3
4	#5927.59	60.5 PK	68.2	-7.7	1.12 V	184	58.0	2.5
5	11650.00	54.6 PK	74.0	-19.4	1.03 V	186	42.1	12.5
6	11650.00	45.3 AV	54.0	-8.7	1.03 V	186	32.8	12.5
7	#17475.00	43.0 PK	68.2	-25.2	1.21 V	188	24.3	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

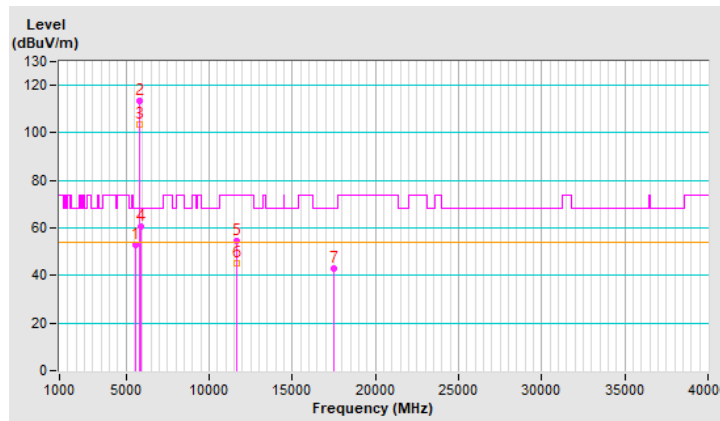


RF Mode	802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.4 PK	74.0	-9.6	1.92 H	281	62.4	2.0
2	5150.00	51.9 AV	54.0	-2.1	1.92 H	281	49.9	2.0
3	*5180.00	112.4 PK			1.92 H	281	110.5	1.9
4	*5180.00	103.9 AV			1.92 H	281	102.0	1.9
5	#10360.00	56.3 PK	68.2	-11.9	2.26 H	343	44.7	11.6
6	15540.00	44.5 PK	74.0	-29.5	2.61 H	334	32.7	11.8
7	15540.00	35.3 AV	54.0	-18.7	2.61 H	334	23.5	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

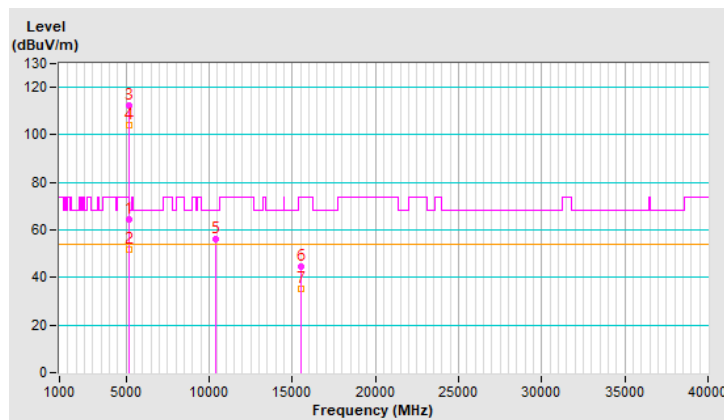


RF Mode	802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.8 PK	74.0	-7.2	1.08 V	185	64.8	2.0
2	5150.00	52.3 AV	54.0	-1.7	1.08 V	185	50.3	2.0
3	*5180.00	113.7 PK			1.08 V	185	111.8	1.9
4	*5180.00	104.5 AV			1.08 V	185	102.6	1.9
5	#10360.00	53.7 PK	68.2	-14.5	1.23 V	115	42.1	11.6
6	15540.00	44.0 PK	74.0	-30.0	1.26 V	188	32.2	11.8
7	15540.00	34.1 AV	54.0	-19.9	1.26 V	188	22.3	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

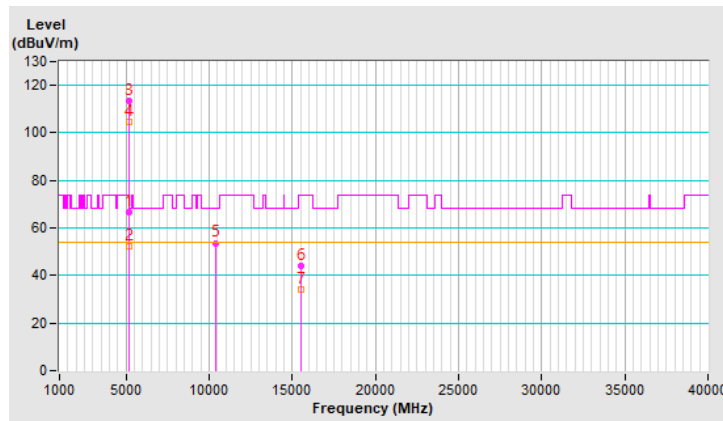


RF Mode	802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	115.4 PK			1.92 H	295	113.6	1.8
2	*5200.00	105.1 AV			1.92 H	295	103.3	1.8
3	#10400.00	55.9 PK	68.2	-12.3	2.22 H	291	44.1	11.8
4	15600.00	44.8 PK	74.0	-29.2	2.78 H	336	33.1	11.7
5	15600.00	35.4 AV	54.0	-18.6	2.78 H	336	23.7	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

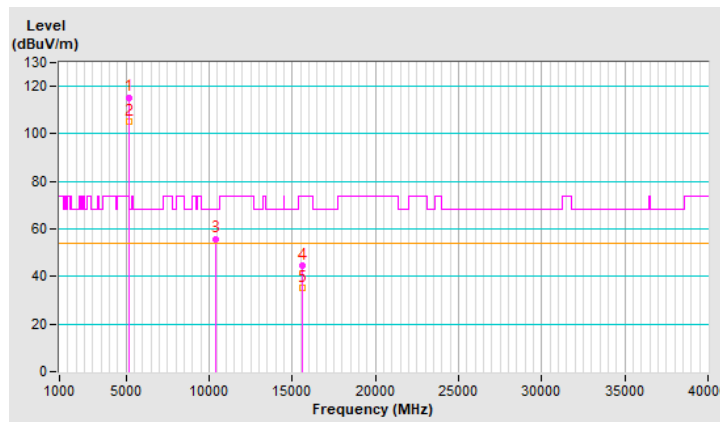


RF Mode	802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	114.1 PK			1.05 V	183	112.3	1.8
2	*5200.00	104.7 AV			1.05 V	183	102.9	1.8
3	#10400.00	55.0 PK	68.2	-13.2	1.23 V	174	43.2	11.8
4	15600.00	45.4 PK	74.0	-28.6	1.05 V	178	33.7	11.7
5	15600.00	35.7 AV	54.0	-18.3	1.05 V	178	24.0	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

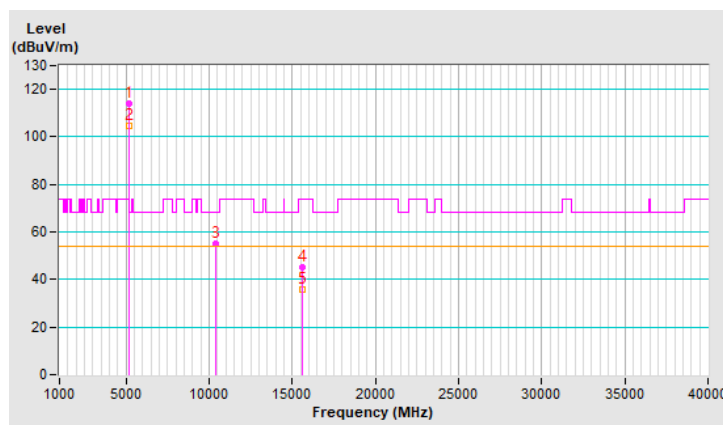


RF Mode	802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.7 PK	74.0	-23.3	1.96 H	288	48.7	2.0
2	5150.00	39.9 AV	54.0	-14.1	1.96 H	288	37.9	2.0
3	*5240.00	114.7 PK			1.86 H	283	113.0	1.7
4	*5240.00	104.8 AV			1.86 H	283	103.1	1.7
5	#10480.00	56.2 PK	68.2	-12.0	2.26 H	269	44.4	11.8
6	15720.00	45.6 PK	74.0	-28.4	2.65 H	351	34.0	11.6
7	15720.00	36.5 AV	54.0	-17.5	2.65 H	351	24.9	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

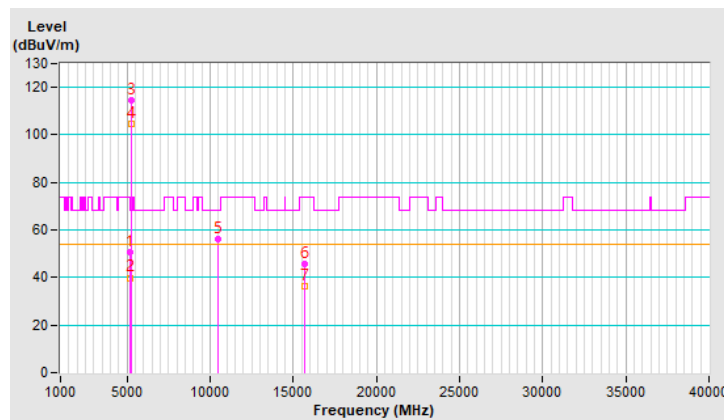


RF Mode	802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.2 PK	74.0	-22.8	1.04 V	161	49.2	2.0
2	5150.00	40.7 AV	54.0	-13.3	1.04 V	161	38.7	2.0
3	*5240.00	115.7 PK			1.13 V	207	114.0	1.7
4	*5240.00	105.3 AV			1.13 V	207	103.6	1.7
5	#10480.00	55.4 PK	68.2	-12.8	1.06 V	182	43.6	11.8
6	15720.00	45.1 PK	74.0	-28.9	1.12 V	198	33.5	11.6
7	15720.00	35.5 AV	54.0	-18.5	1.12 V	198	23.9	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

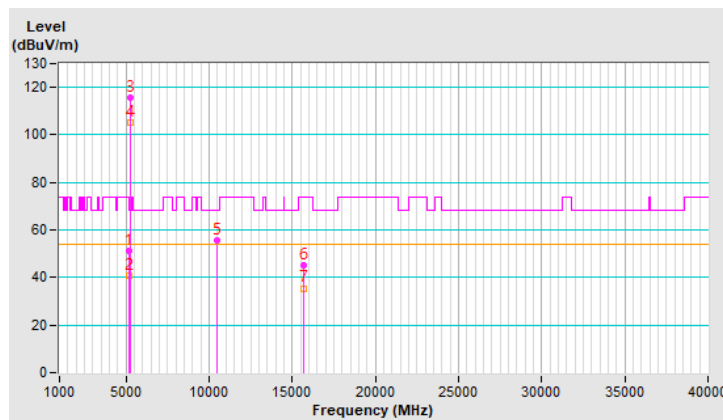


RF Mode	802.11ax (HE20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.8 PK	74.0	-23.2	1.93 H	300	48.8	2.0
2	5150.00	40.6 AV	54.0	-13.4	1.93 H	300	38.6	2.0
3	*5260.00	114.4 PK			1.93 H	300	112.9	1.5
4	*5260.00	104.1 AV			1.93 H	300	102.6	1.5
5	#10520.00	56.1 PK	68.2	-12.1	2.29 H	336	44.4	11.7
6	15780.00	45.7 PK	74.0	-28.3	2.67 H	357	34.4	11.3
7	15780.00	36.1 AV	54.0	-17.9	2.67 H	357	24.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

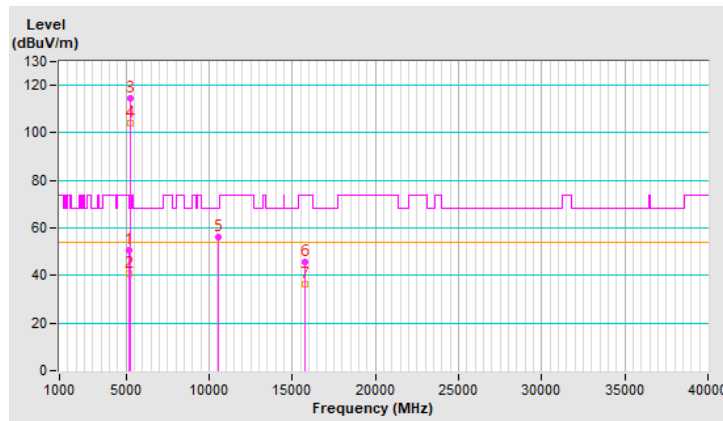


RF Mode	802.11ax (HE20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.6 PK	74.0	-23.4	1.06 V	194	48.6	2.0
2	5150.00	40.7 AV	54.0	-13.3	1.06 V	194	38.7	2.0
3	*5260.00	115.5 PK			1.06 V	194	114.0	1.5
4	*5260.00	105.2 AV			1.06 V	194	103.7	1.5
5	#10520.00	54.9 PK	68.2	-13.3	1.10 V	193	43.2	11.7
6	15780.00	45.4 PK	74.0	-28.6	1.16 V	199	34.1	11.3
7	15780.00	35.5 AV	54.0	-18.5	1.16 V	199	24.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

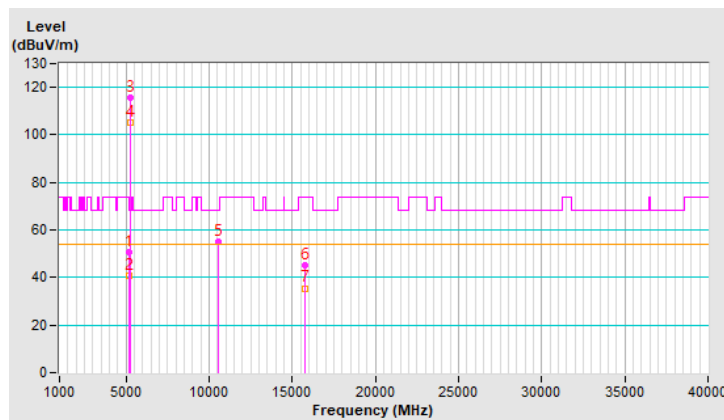


RF Mode	802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	114.8 PK			1.89 H	341	113.3	1.5
2	*5300.00	105.2 AV			1.89 H	341	103.7	1.5
3	10600.00	55.1 PK	74.0	-18.9	2.30 H	311	43.4	11.7
4	10600.00	45.3 AV	54.0	-8.7	2.30 H	311	33.6	11.7
5	15900.00	46.3 PK	74.0	-27.7	2.49 H	345	35.3	11.0
6	15900.00	36.5 AV	54.0	-17.5	2.49 H	345	25.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

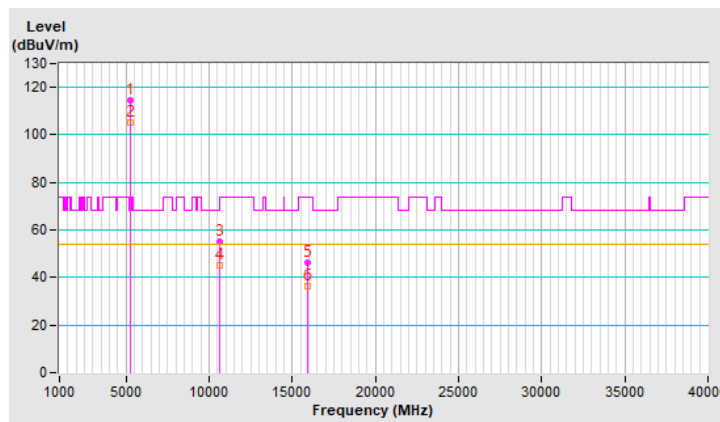


RF Mode	802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5300.00	114.9 PK			1.02 V	212	113.4	1.5
2	*5300.00	105.2 AV			1.02 V	212	103.7	1.5
3	10600.00	55.2 PK	74.0	-18.8	1.01 V	186	43.5	11.7
4	10600.00	45.9 AV	54.0	-8.1	1.01 V	186	34.2	11.7
5	15900.00	44.8 PK	74.0	-29.2	1.18 V	172	33.8	11.0
6	15900.00	34.9 AV	54.0	-19.1	1.18 V	172	23.9	11.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

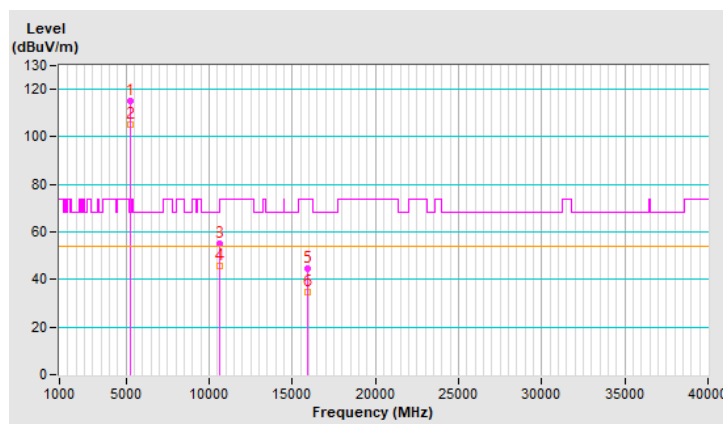


RF Mode	802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	111.0 PK			1.92 H	333	109.4	1.6
2	*5320.00	102.9 AV			1.92 H	333	101.3	1.6
3	5350.00	62.1 PK	74.0	-11.9	1.92 H	333	60.4	1.7
4	5350.00	47.0 AV	54.0	-7.0	1.92 H	333	45.3	1.7
5	10640.00	56.7 PK	74.0	-17.3	2.06 H	314	45.0	11.7
6	10640.00	46.3 AV	54.0	-7.7	2.06 H	314	34.6	11.7
7	15960.00	45.0 PK	74.0	-29.0	2.52 H	311	33.7	11.3
8	15960.00	35.4 AV	54.0	-18.6	2.52 H	311	24.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

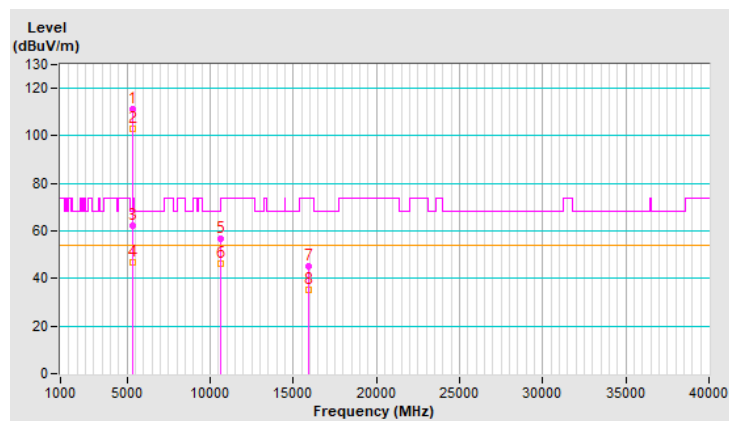


RF Mode	802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	111.9 PK			1.04 V	163	110.3	1.6
2	*5320.00	102.5 AV			1.04 V	163	100.9	1.6
3	5350.00	67.7 PK	74.0	-6.3	1.04 V	163	66.0	1.7
4	5350.00	51.8 AV	54.0	-2.2	1.04 V	163	50.1	1.7
5	10640.00	55.9 PK	74.0	-18.1	1.03 V	198	44.2	11.7
6	10640.00	46.4 AV	54.0	-7.6	1.03 V	198	34.7	11.7
7	15960.00	45.3 PK	74.0	-28.7	1.27 V	212	34.0	11.3
8	15960.00	35.4 AV	54.0	-18.6	1.27 V	212	24.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

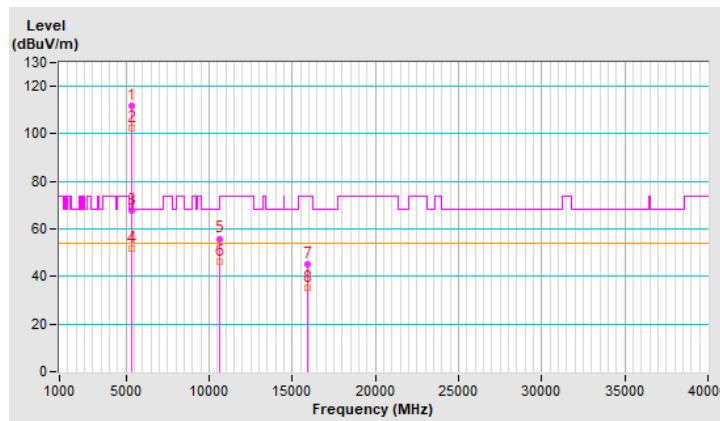


RF Mode	802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.0 PK	74.0	-15.0	2.00 H	345	57.2	1.8
2	5460.00	46.0 AV	54.0	-8.0	2.00 H	345	44.2	1.8
3	#5470.00	62.8 PK	68.2	-5.4	2.00 H	345	61.0	1.8
4	*5500.00	111.6 PK			2.00 H	345	109.9	1.7
5	*5500.00	102.5 AV			2.00 H	345	100.8	1.7
6	11000.00	56.4 PK	74.0	-17.6	2.17 H	258	44.0	12.4
7	11000.00	45.8 AV	54.0	-8.2	2.17 H	258	33.4	12.4
8	#16500.00	44.8 PK	68.2	-23.4	2.50 H	355	31.1	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

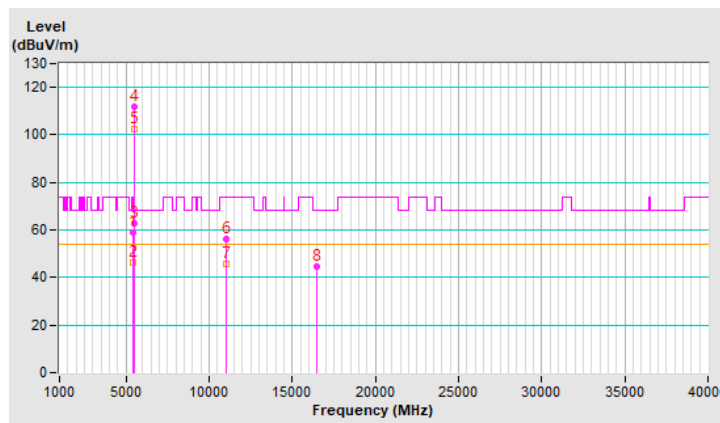


RF Mode	802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.4 PK	74.0	-18.6	1.09 V	202	53.6	1.8
2	5460.00	44.9 AV	54.0	-9.1	1.09 V	202	43.1	1.8
3	#5470.00	66.3 PK	68.2	-1.9	1.09 V	202	64.5	1.8
4	*5500.00	113.4 PK			1.09 V	202	111.7	1.7
5	*5500.00	102.3 AV			1.09 V	202	100.6	1.7
6	11000.00	55.9 PK	74.0	-18.1	1.16 V	160	43.5	12.4
7	11000.00	46.3 AV	54.0	-7.7	1.16 V	160	33.9	12.4
8	#16500.00	44.4 PK	68.2	-23.8	1.13 V	185	30.7	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

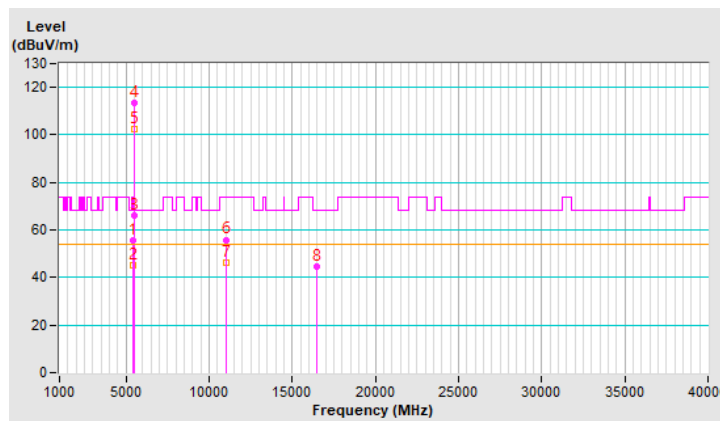


RF Mode	802.11ax (HE20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	114.9 PK			1.94 H	324	113.1	1.8
2	*5580.00	104.8 AV			1.94 H	324	103.0	1.8
3	11160.00	56.0 PK	74.0	-18.0	2.22 H	326	44.0	12.0
4	11160.00	46.3 AV	54.0	-7.7	2.22 H	326	34.3	12.0
5	#16740.00	44.0 PK	68.2	-24.2	2.72 H	295	28.8	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

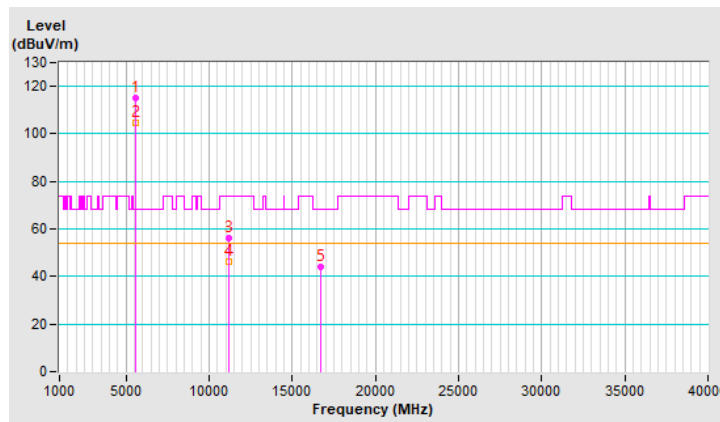


RF Mode	802.11ax (HE20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	113.5 PK			1.11 V	198	111.7	1.8
2	*5580.00	103.6 AV			1.11 V	198	101.8	1.8
3	11160.00	55.7 PK	74.0	-18.3	1.00 V	207	43.7	12.0
4	11160.00	46.0 AV	54.0	-8.0	1.00 V	207	34.0	12.0
5	#16740.00	46.2 PK	68.2	-22.0	1.17 V	155	31.0	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

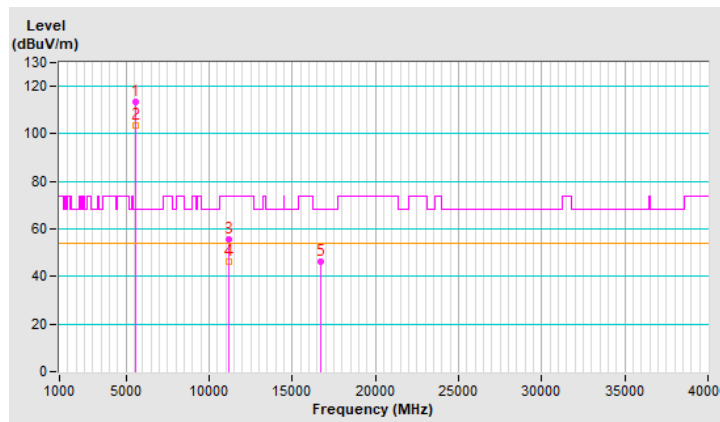


RF Mode	802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	111.4 PK			2.03 H	310	109.4	2.0
2	*5700.00	101.4 AV			2.03 H	310	99.4	2.0
3	#5725.00	65.8 PK	68.2	-2.4	2.03 H	310	63.7	2.1
4	11400.00	55.4 PK	74.0	-18.6	2.22 H	316	42.7	12.7
5	11400.00	45.4 AV	54.0	-8.6	2.22 H	316	32.7	12.7
6	#17100.00	45.0 PK	68.2	-23.2	2.62 H	354	28.7	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

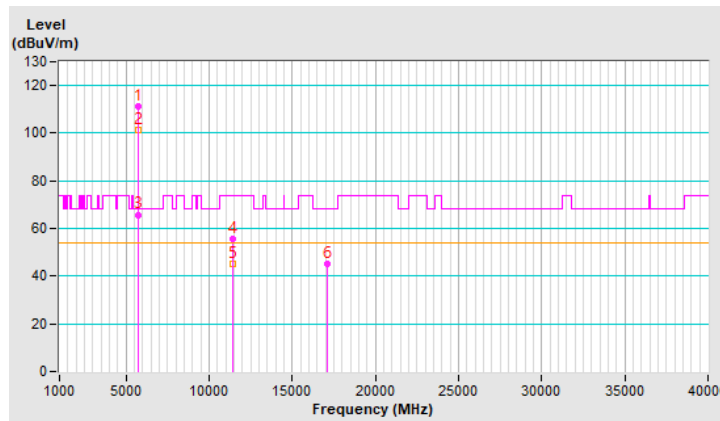


RF Mode	802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	111.5 PK			1.08 V	198	109.5	2.0
2	*5700.00	101.4 AV			1.08 V	198	99.4	2.0
3	#5725.00	66.0 PK	68.2	-2.2	1.08 V	198	63.9	2.1
4	11400.00	54.4 PK	74.0	-19.6	1.13 V	209	41.7	12.7
5	11400.00	44.6 AV	54.0	-9.4	1.13 V	209	31.9	12.7
6	#17100.00	44.2 PK	68.2	-24.0	1.05 V	197	27.9	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

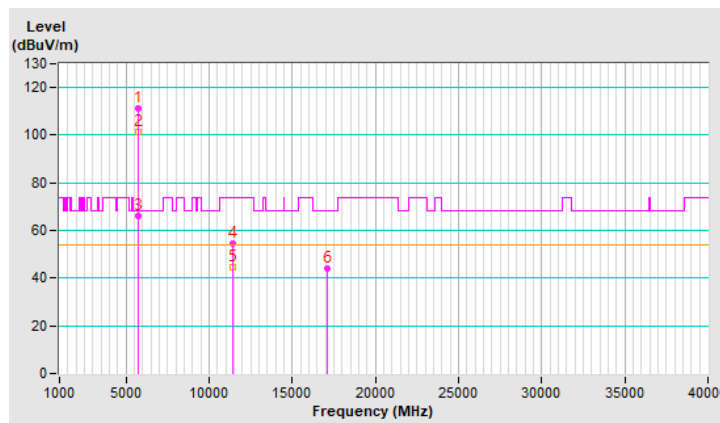


RF Mode	802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.9 PK	74.0	-23.1	2.03 H	343	49.1	1.8
2	5460.00	39.7 AV	54.0	-14.3	2.03 H	343	37.9	1.8
3	#5470.00	51.3 PK	68.2	-16.9	2.03 H	343	49.5	1.8
4	*5720.00	112.6 PK			2.03 H	343	110.5	2.1
5	*5720.00	103.1 AV			2.03 H	343	101.0	2.1
6	#5850.00	51.3 PK	68.2	-16.9	1.97 H	340	49.0	2.3
7	11440.00	55.5 PK	74.0	-18.5	2.29 H	312	42.8	12.7
8	11440.00	46.0 AV	54.0	-8.0	2.29 H	312	33.3	12.7
9	#17160.00	45.0 PK	68.2	-23.2	2.76 H	333	28.7	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

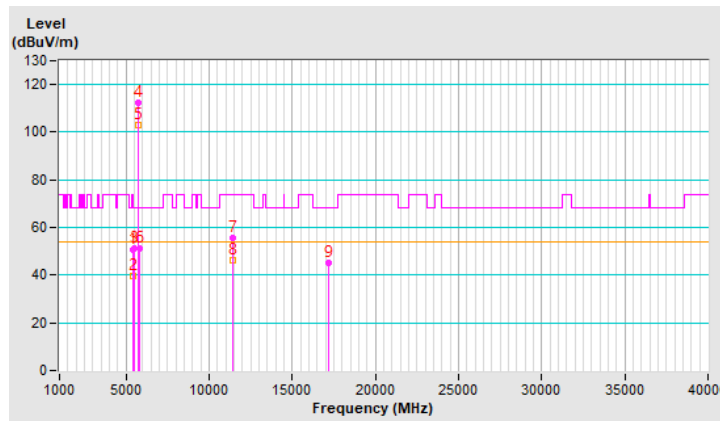


RF Mode	802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.1 PK	74.0	-23.9	1.03 V	180	48.3	1.8
2	5460.00	39.4 AV	54.0	-14.6	1.03 V	180	37.6	1.8
3	#5470.00	52.1 PK	68.2	-16.1	1.03 V	180	50.3	1.8
4	*5720.00	113.8 PK			1.03 V	180	111.7	2.1
5	*5720.00	103.8 AV			1.03 V	180	101.7	2.1
6	#5850.00	52.1 PK	68.2	-16.1	1.10 V	214	49.8	2.3
7	11440.00	54.4 PK	74.0	-19.6	1.25 V	222	41.7	12.7
8	11440.00	45.2 AV	54.0	-8.8	1.25 V	222	32.5	12.7
9	#17160.00	45.1 PK	68.2	-23.1	1.12 V	168	28.8	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

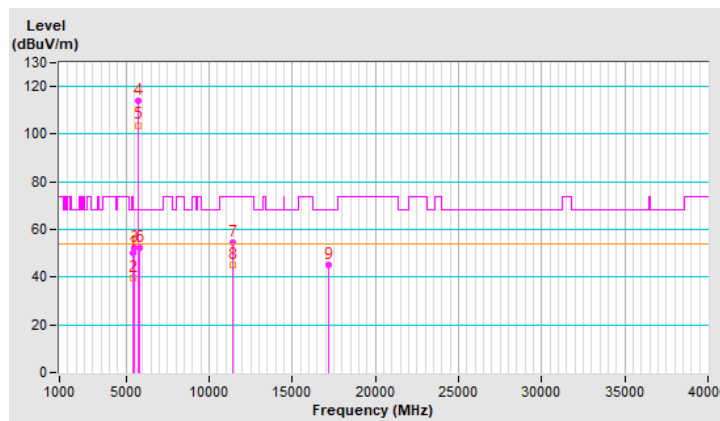


RF Mode	802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.03	55.3 PK	68.2	-12.9	2.01 H	326	53.3	2.0
2	*5745.00	114.3 PK			2.01 H	326	112.2	2.1
3	*5745.00	103.8 AV			2.01 H	326	101.7	2.1
4	#5973.70	50.8 PK	68.2	-17.4	2.01 H	326	48.2	2.6
5	11490.00	56.3 PK	74.0	-17.7	2.08 H	307	43.5	12.8
6	11490.00	46.0 AV	54.0	-8.0	2.08 H	307	33.2	12.8
7	#17235.00	45.9 PK	68.2	-22.3	2.67 H	327	29.4	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

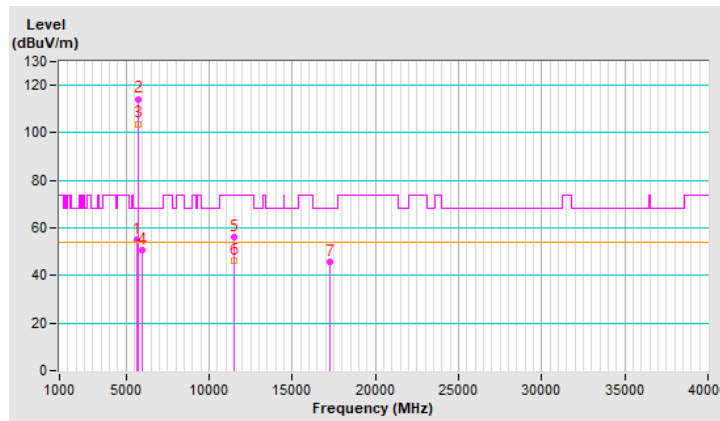


RF Mode	802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5633.53	54.9 PK	68.2	-13.3	1.06 V	176	53.0	1.9
2	*5745.00	114.7 PK			1.06 V	176	112.6	2.1
3	*5745.00	104.6 AV			1.06 V	176	102.5	2.1
4	#5987.32	50.5 PK	68.2	-17.7	1.06 V	176	47.9	2.6
5	11490.00	55.6 PK	74.0	-18.4	1.21 V	171	42.8	12.8
6	11490.00	45.6 AV	54.0	-8.4	1.21 V	171	32.8	12.8
7	#17235.00	45.8 PK	68.2	-22.4	1.27 V	189	29.3	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

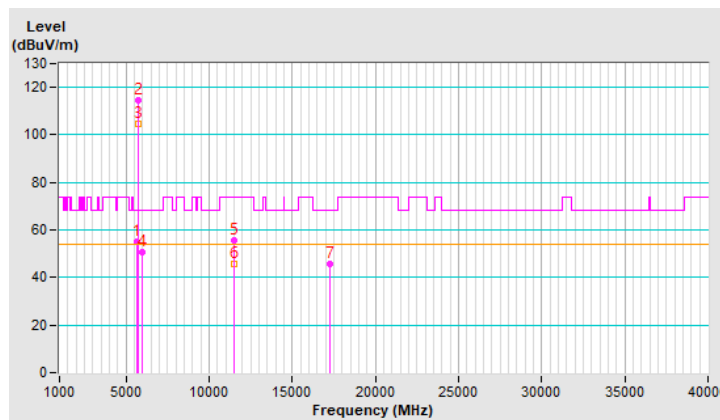


RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5618.58	49.8 PK	68.2	-18.4	1.90 H	339	47.9	1.9
2	*5785.00	113.1 PK			1.90 H	339	110.9	2.2
3	*5785.00	103.8 AV			1.90 H	339	101.6	2.2
4	#5984.74	49.3 PK	68.2	-18.9	1.90 H	339	46.7	2.6
5	11570.00	56.6 PK	74.0	-17.4	2.09 H	305	43.9	12.7
6	11570.00	46.9 AV	54.0	-7.1	2.09 H	305	34.2	12.7
7	#17355.00	45.6 PK	68.2	-22.6	2.79 H	322	28.2	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

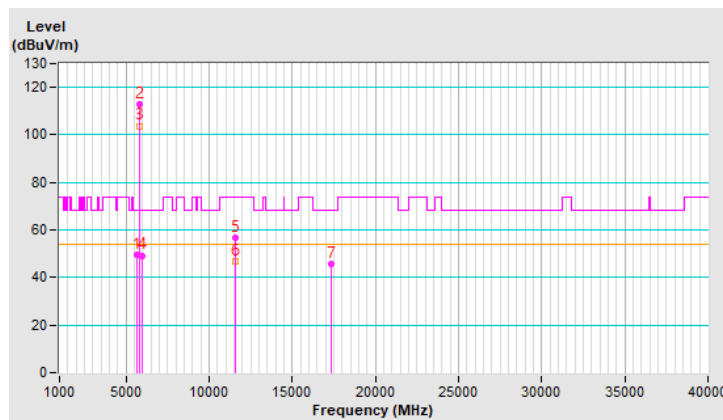


RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5621.33	50.7 PK	68.2	-17.5	1.19 V	192	48.8	1.9
2	*5785.00	115.2 PK			1.19 V	192	113.0	2.2
3	*5785.00	105.0 AV			1.19 V	192	102.8	2.2
4	#6023.52	51.9 PK	68.2	-16.3	1.19 V	192	49.3	2.6
5	11570.00	55.9 PK	74.0	-18.1	1.06 V	209	43.2	12.7
6	11570.00	45.9 AV	54.0	-8.1	1.06 V	209	33.2	12.7
7	#17355.00	45.6 PK	68.2	-22.6	1.27 V	182	28.2	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

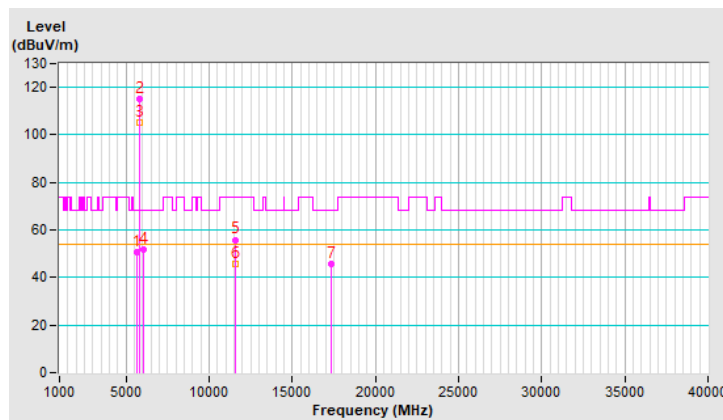


RF Mode	802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5586.97	48.3 PK	68.2	-19.9	1.95 H	346	46.5	1.8
2	*5825.00	114.2 PK			1.95 H	346	111.9	2.3
3	*5825.00	104.2 AV			1.95 H	346	101.9	2.3
4	#5960.31	51.7 PK	68.2	-16.5	1.95 H	346	49.1	2.6
5	11650.00	56.3 PK	74.0	-17.7	2.19 H	329	43.8	12.5
6	11650.00	46.0 AV	54.0	-8.0	2.19 H	329	33.5	12.5
7	#17475.00	43.9 PK	68.2	-24.3	2.52 H	327	25.2	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

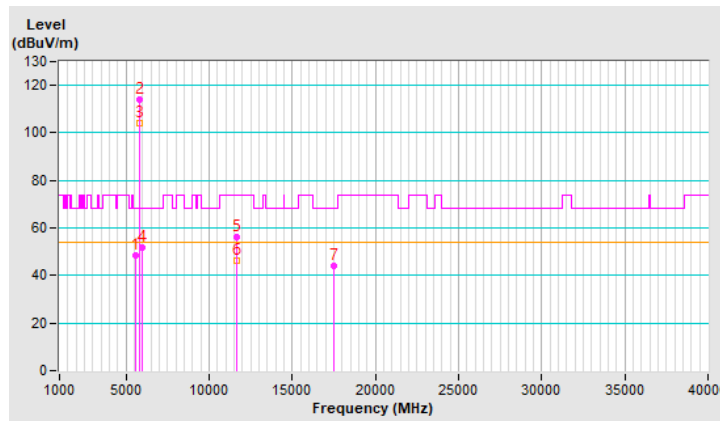


RF Mode	802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5623.43	49.8 PK	68.2	-18.4	1.01 V	204	47.9	1.9
2	*5825.00	114.5 PK			1.01 V	204	112.2	2.3
3	*5825.00	104.9 AV			1.01 V	204	102.6	2.3
4	#6012.92	51.4 PK	68.2	-16.8	1.01 V	204	48.8	2.6
5	11650.00	55.3 PK	74.0	-18.7	1.23 V	182	42.8	12.5
6	11650.00	46.0 AV	54.0	-8.0	1.23 V	182	33.5	12.5
7	#17475.00	45.3 PK	68.2	-22.9	1.03 V	198	26.6	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

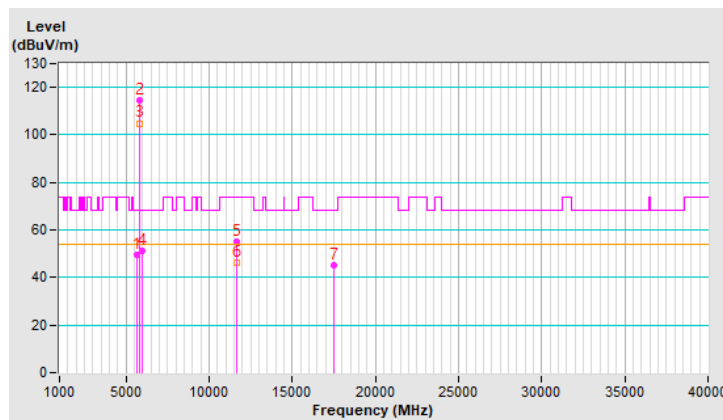


RF Mode	802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.0 PK	74.0	-8.0	1.86 H	347	64.0	2.0
2	5150.00	50.9 AV	54.0	-3.1	1.86 H	347	48.9	2.0
3	*5190.00	110.5 PK			1.86 H	347	108.6	1.9
4	*5190.00	99.6 AV			1.86 H	347	97.7	1.9
5	#10380.00	56.3 PK	68.2	-11.9	2.16 H	307	44.5	11.8
6	15570.00	44.8 PK	74.0	-29.2	2.57 H	348	33.0	11.8
7	15570.00	35.9 AV	54.0	-18.1	2.57 H	348	24.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

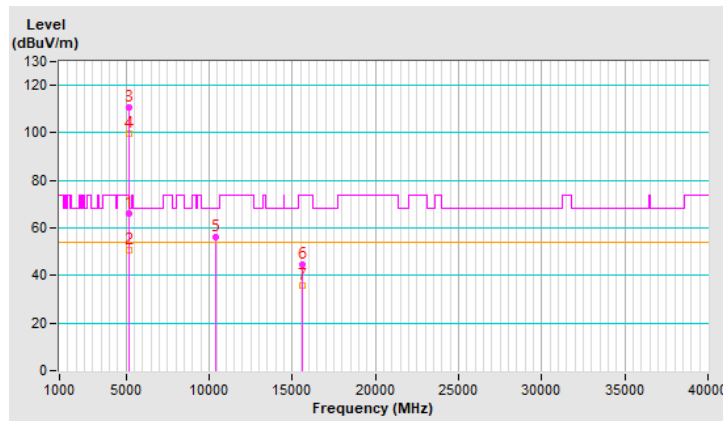


RF Mode	802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.8 PK	74.0	-6.2	1.17 V	17	65.8	2.0
2	5150.00	52.4 AV	54.0	-1.6	1.17 V	17	50.4	2.0
3	*5190.00	110.0 PK			1.17 V	17	108.1	1.9
4	*5190.00	99.3 AV			1.17 V	17	97.4	1.9
5	#10380.00	55.0 PK	68.2	-13.2	1.23 V	202	43.2	11.8
6	15570.00	45.6 PK	74.0	-28.4	1.16 V	164	33.8	11.8
7	15570.00	36.0 AV	54.0	-18.0	1.16 V	164	24.2	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

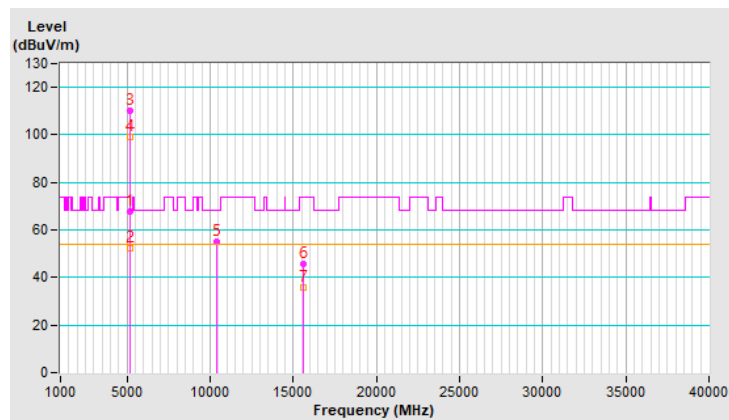


RF Mode	802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.2 PK	74.0	-11.8	1.90 H	336	60.2	2.0
2	5150.00	49.8 AV	54.0	-4.2	1.90 H	336	47.8	2.0
3	*5230.00	113.7 PK			1.90 H	336	112.0	1.7
4	*5230.00	101.6 AV			1.90 H	336	99.9	1.7
5	#10460.00	55.4 PK	68.2	-12.8	2.24 H	293	43.6	11.8
6	15690.00	45.4 PK	74.0	-28.6	2.65 H	332	33.7	11.7
7	15690.00	36.5 AV	54.0	-17.5	2.65 H	332	24.8	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

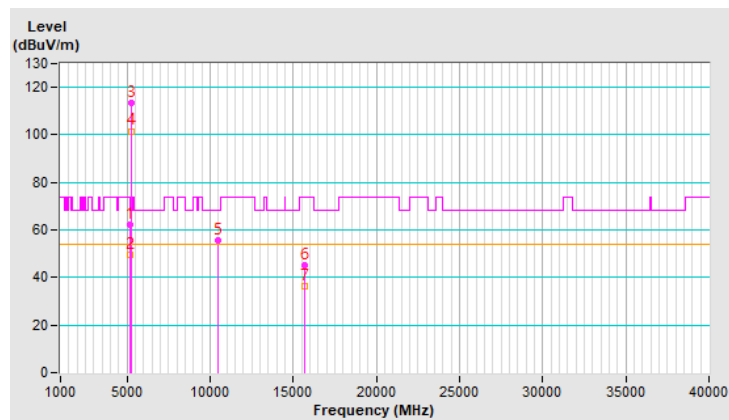


RF Mode	802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.6 PK	74.0	-11.4	1.09 V	10	60.6	2.0
2	5150.00	50.4 AV	54.0	-3.6	1.09 V	10	48.4	2.0
3	*5230.00	113.0 PK			1.09 V	10	111.3	1.7
4	*5230.00	101.5 AV			1.09 V	10	99.8	1.7
5	#10460.00	55.6 PK	68.2	-12.6	1.08 V	201	43.8	11.8
6	15690.00	45.4 PK	74.0	-28.6	1.19 V	189	33.7	11.7
7	15690.00	35.8 AV	54.0	-18.2	1.19 V	189	24.1	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

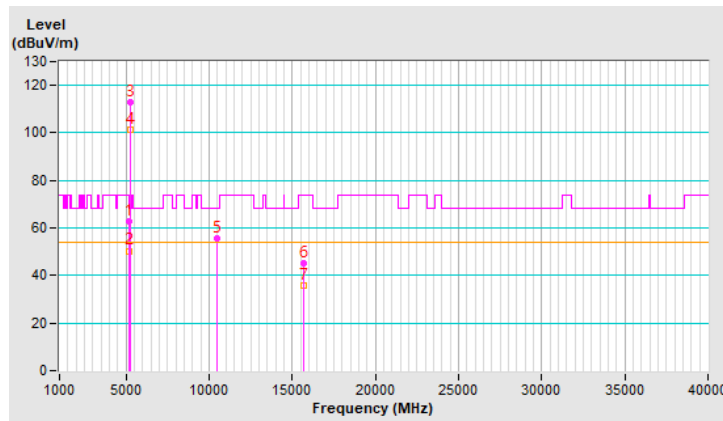


RF Mode	802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5270.00	113.2 PK			1.90 H	360	111.7	1.5
2	*5270.00	101.9 AV			1.90 H	360	100.4	1.5
3	5350.00	68.8 PK	74.0	-5.2	1.90 H	360	67.1	1.7
4	5350.00	52.2 AV	54.0	-1.8	1.90 H	360	50.5	1.7
5	#10540.00	56.4 PK	68.2	-11.8	2.02 H	285	44.6	11.8
6	15810.00	45.0 PK	74.0	-29.0	2.57 H	360	33.8	11.2
7	15810.00	35.8 AV	54.0	-18.2	2.57 H	360	24.6	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

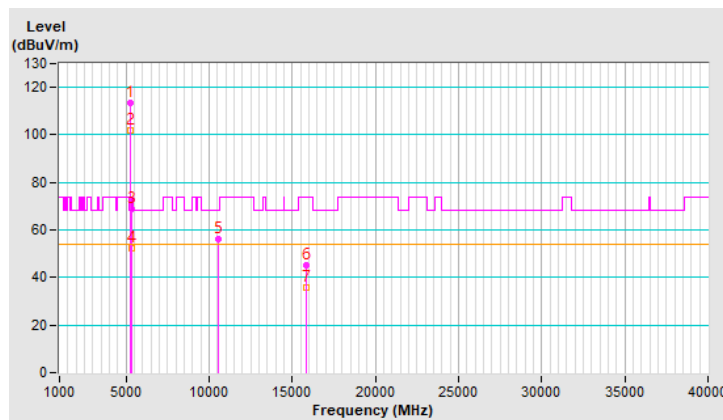


RF Mode	802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5270.00	112.9 PK			1.28 V	14	111.4	1.5
2	*5270.00	101.5 AV			1.28 V	14	100.0	1.5
3	5350.00	70.0 PK	74.0	-4.0	1.28 V	14	68.3	1.7
4	5350.00	51.4 AV	54.0	-2.6	1.28 V	14	49.7	1.7
5	#10540.00	56.5 PK	68.2	-11.7	1.20 V	170	44.7	11.8
6	15810.00	45.9 PK	74.0	-28.1	1.13 V	186	34.7	11.2
7	15810.00	35.7 AV	54.0	-18.3	1.13 V	186	24.5	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

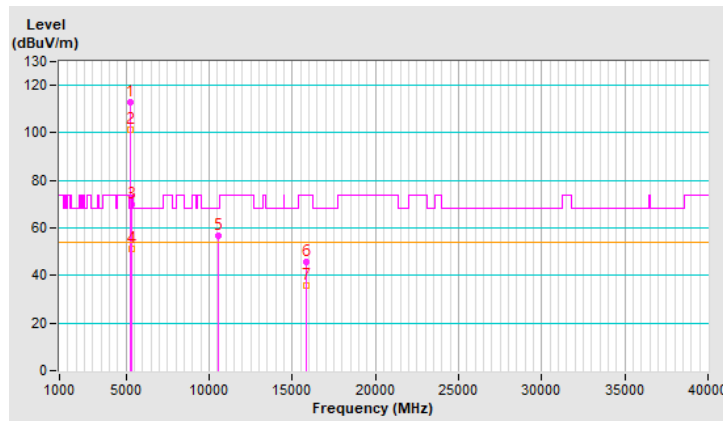


RF Mode	802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	106.1 PK			1.96 H	355	104.5	1.6
2	*5310.00	96.2 AV			1.96 H	355	94.6	1.6
3	5350.00	64.4 PK	74.0	-9.6	1.96 H	355	62.7	1.7
4	5350.00	50.5 AV	54.0	-3.5	1.96 H	355	48.8	1.7
5	10620.00	54.9 PK	74.0	-19.1	2.22 H	333	43.2	11.7
6	10620.00	45.7 AV	54.0	-8.3	2.22 H	333	34.0	11.7
7	15930.00	44.8 PK	74.0	-29.2	2.60 H	327	33.7	11.1
8	15930.00	35.6 AV	54.0	-18.4	2.60 H	327	24.5	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

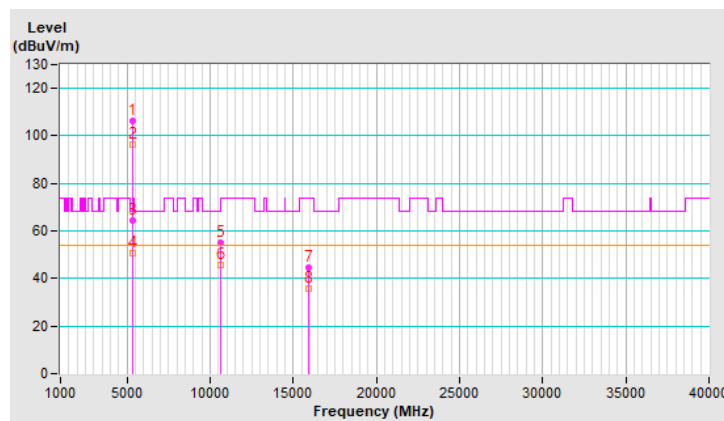


RF Mode	802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	107.3 PK			1.24 V	20	105.7	1.6
2	*5310.00	97.1 AV			1.24 V	20	95.5	1.6
3	5350.00	63.8 PK	74.0	-10.2	1.24 V	20	62.1	1.7
4	5350.00	52.6 AV	54.0	-1.4	1.24 V	20	50.9	1.7
5	10620.00	56.1 PK	74.0	-17.9	1.19 V	178	44.4	11.7
6	10620.00	46.2 AV	54.0	-7.8	1.19 V	178	34.5	11.7
7	15930.00	44.1 PK	74.0	-29.9	1.14 V	191	33.0	11.1
8	15930.00	34.0 AV	54.0	-20.0	1.14 V	191	22.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

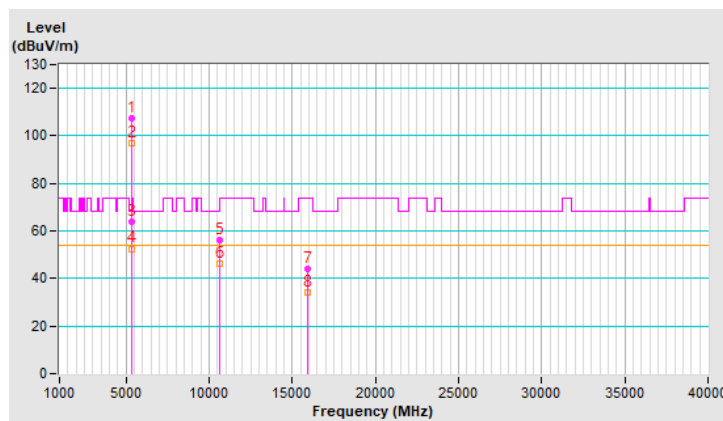


RF Mode	802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.6 PK	74.0	-17.4	1.99 H	359	54.8	1.8
2	5460.00	45.8 AV	54.0	-8.2	1.99 H	359	44.0	1.8
3	#5470.00	62.5 PK	68.2	-5.7	1.99 H	359	60.7	1.8
4	*5510.00	108.4 PK			1.99 H	359	106.7	1.7
5	*5510.00	98.0 AV			1.99 H	359	96.3	1.7
6	11020.00	56.8 PK	74.0	-17.2	2.07 H	304	44.4	12.4
7	11020.00	46.5 AV	54.0	-7.5	2.07 H	304	34.1	12.4
8	#16530.00	44.4 PK	68.2	-23.8	2.65 H	350	30.5	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

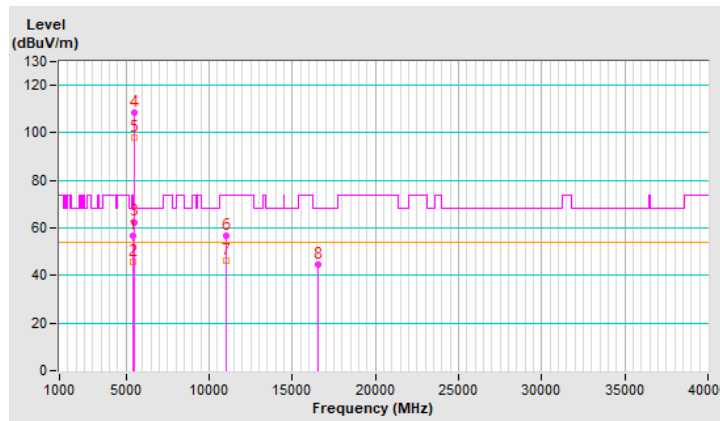


RF Mode	802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.9 PK	74.0	-13.1	1.17 V	27	59.1	1.8
2	5460.00	46.1 AV	54.0	-7.9	1.17 V	27	44.3	1.8
3	#5470.00	66.1 PK	68.2	-2.1	1.17 V	27	64.3	1.8
4	*5510.00	109.2 PK			1.17 V	27	107.5	1.7
5	*5510.00	99.7 AV			1.17 V	27	98.0	1.7
6	11020.00	56.0 PK	74.0	-18.0	1.22 V	178	43.6	12.4
7	11020.00	46.7 AV	54.0	-7.3	1.22 V	178	34.3	12.4
8	#16530.00	45.2 PK	68.2	-23.0	1.28 V	172	31.3	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

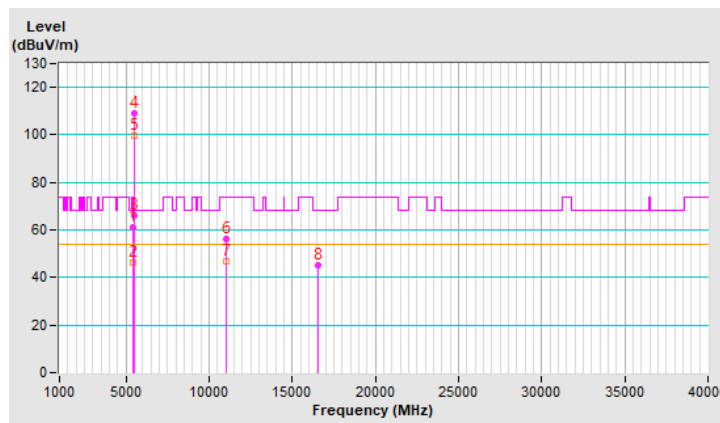


RF Mode	802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	111.7 PK			1.79 H	313	109.9	1.8
2	*5550.00	100.8 AV			1.79 H	313	99.0	1.8
3	11100.00	55.7 PK	74.0	-18.3	2.21 H	283	43.5	12.2
4	11100.00	45.6 AV	54.0	-8.4	2.21 H	283	33.4	12.2
5	#16650.00	44.7 PK	68.2	-23.5	2.71 H	336	29.9	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

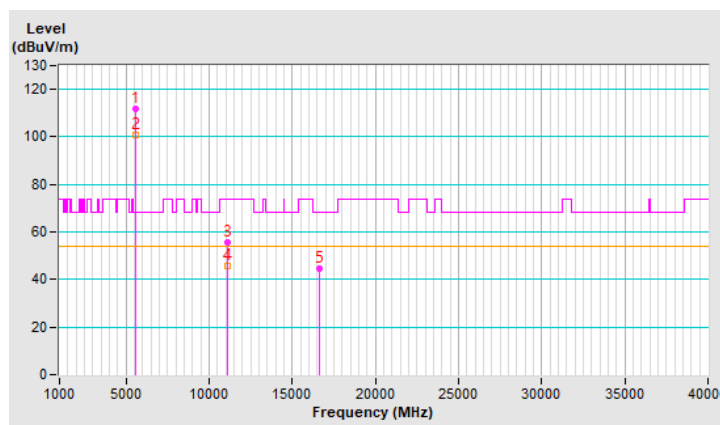


RF Mode	802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	112.7 PK			1.19 V	24	110.9	1.8
2	*5550.00	101.5 AV			1.19 V	24	99.7	1.8
3	11100.00	55.1 PK	74.0	-18.9	1.14 V	207	42.9	12.2
4	11100.00	45.7 AV	54.0	-8.3	1.14 V	207	33.5	12.2
5	#16650.00	46.0 PK	68.2	-22.2	1.15 V	173	31.2	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

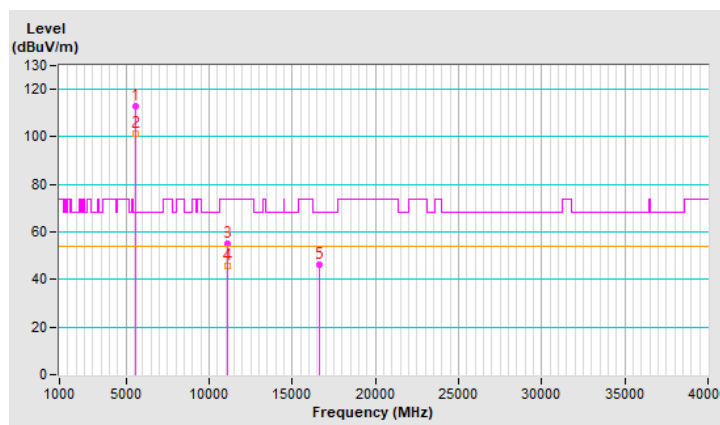


RF Mode	802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	110.1 PK			1.95 H	308	108.2	1.9
2	*5670.00	99.2 AV			1.95 H	308	97.3	1.9
3	#5725.00	62.1 PK	68.2	-6.1	1.95 H	308	60.0	2.1
4	11340.00	55.8 PK	74.0	-18.2	2.14 H	286	43.3	12.5
5	11340.00	45.9 AV	54.0	-8.1	2.14 H	286	33.4	12.5
6	#17010.00	46.1 PK	68.2	-22.1	2.60 H	343	29.8	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

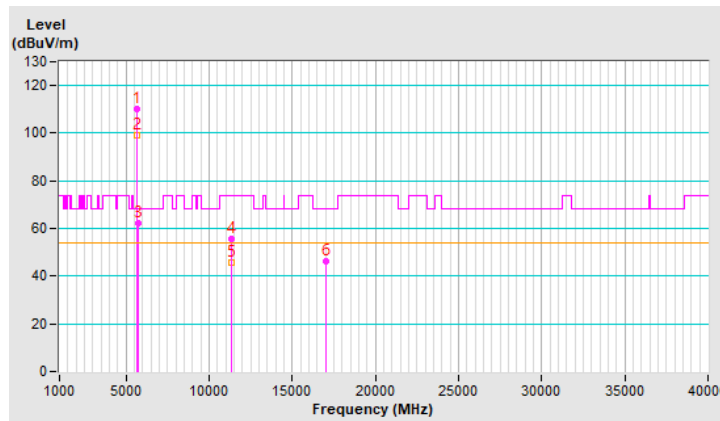


RF Mode	802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	110.0 PK			1.17 V	12	108.1	1.9
2	*5670.00	99.3 AV			1.17 V	12	97.4	1.9
3	#5725.00	66.0 PK	68.2	-2.2	1.17 V	12	63.9	2.1
4	11340.00	56.0 PK	74.0	-18.0	1.08 V	191	43.5	12.5
5	11340.00	46.1 AV	54.0	-7.9	1.08 V	191	33.6	12.5
6	#17010.00	45.3 PK	68.2	-22.9	1.20 V	177	29.0	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

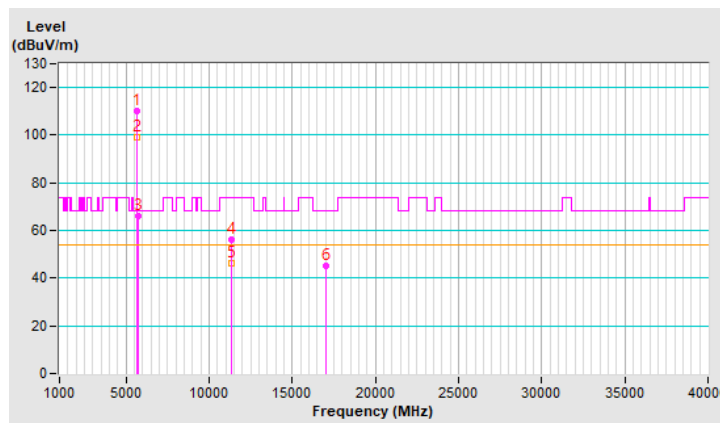


RF Mode	802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.6 PK	74.0	-24.4	1.93 H	296	47.8	1.8
2	5460.00	38.5 AV	54.0	-15.5	1.93 H	296	36.7	1.8
3	#5470.00	51.6 PK	68.2	-16.6	1.93 H	296	49.8	1.8
4	*5710.00	111.6 PK			1.93 H	296	109.6	2.0
5	*5710.00	100.8 AV			1.93 H	296	98.8	2.0
6	#5850.00	56.0 PK	68.2	-12.2	1.97 H	291	53.7	2.3
7	11420.00	57.0 PK	74.0	-17.0	2.11 H	300	44.3	12.7
8	11420.00	46.7 AV	54.0	-7.3	2.11 H	300	34.0	12.7
9	#17130.00	45.4 PK	68.2	-22.8	2.58 H	353	29.1	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

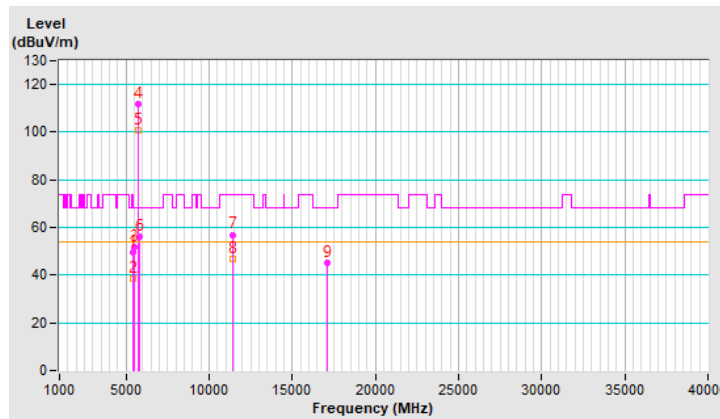


RF Mode	802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.2 PK	74.0	-23.8	1.13 V	5	48.4	1.8
2	5460.00	38.5 AV	54.0	-15.5	1.13 V	5	36.7	1.8
3	#5470.00	51.0 PK	68.2	-17.2	1.13 V	5	49.2	1.8
4	*5710.00	111.7 PK			1.13 V	5	109.7	2.0
5	*5710.00	101.5 AV			1.13 V	5	99.5	2.0
6	#5850.00	54.6 PK	68.2	-13.6	1.09 V	10	52.3	2.3
7	11420.00	55.3 PK	74.0	-18.7	1.02 V	205	42.6	12.7
8	11420.00	46.2 AV	54.0	-7.8	1.02 V	205	33.5	12.7
9	#17130.00	45.4 PK	68.2	-22.8	1.13 V	157	29.1	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

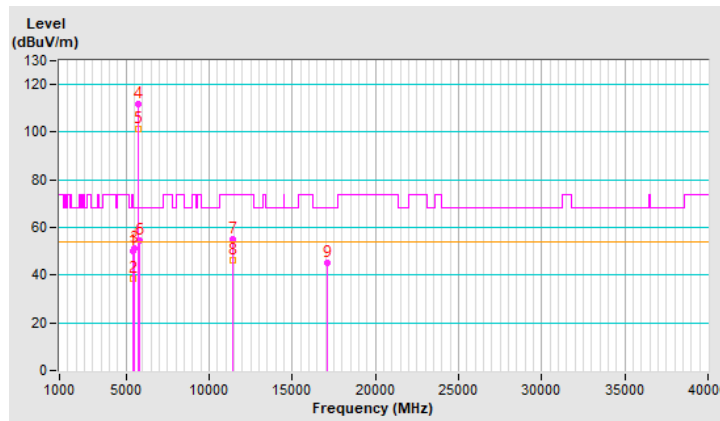


RF Mode	802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.19	59.1 PK	68.2	-9.1	2.00 H	345	57.2	1.9
2	*5755.00	113.2 PK			2.00 H	345	111.1	2.1
3	*5755.00	101.1 AV			2.00 H	345	99.0	2.1
4	#5941.60	54.2 PK	68.2	-14.0	2.00 H	345	51.7	2.5
5	11510.00	55.8 PK	74.0	-18.2	2.15 H	289	43.0	12.8
6	11510.00	45.9 AV	54.0	-8.1	2.15 H	289	33.1	12.8
7	#17265.00	45.3 PK	68.2	-22.9	2.55 H	339	28.7	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

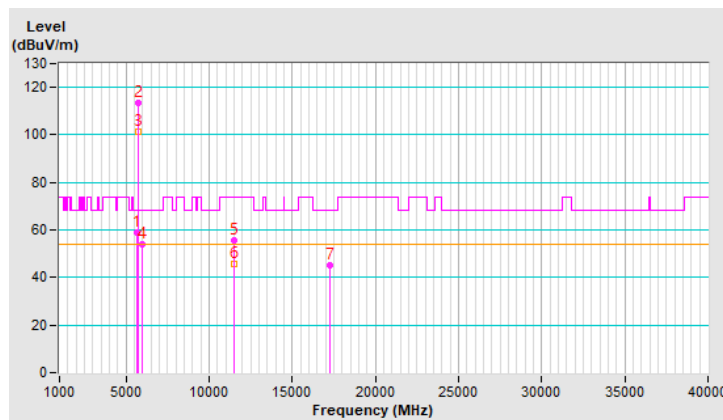


RF Mode	802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.19	61.5 PK	68.2	-6.7	1.18 V	32	59.6	1.9
2	*5755.00	111.9 PK			1.18 V	32	109.8	2.1
3	*5755.00	101.5 AV			1.18 V	32	99.4	2.1
4	#5942.50	54.8 PK	68.2	-13.4	1.18 V	32	52.3	2.5
5	11510.00	55.1 PK	74.0	-18.9	1.05 V	200	42.3	12.8
6	11510.00	45.7 AV	54.0	-8.3	1.05 V	200	32.9	12.8
7	#17265.00	44.4 PK	68.2	-23.8	1.32 V	162	27.8	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

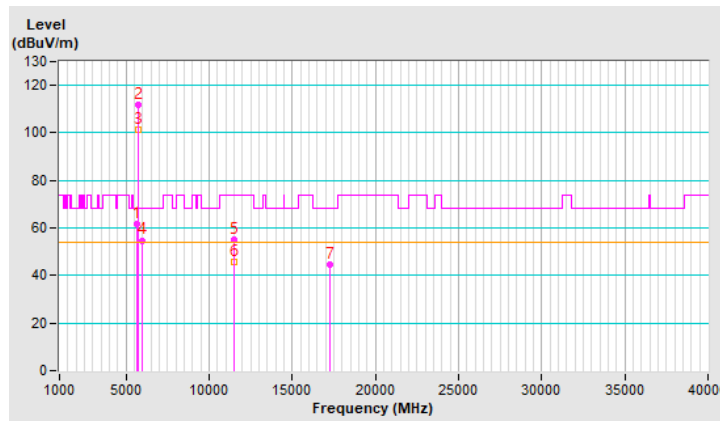


RF Mode	802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5624.55	51.3 PK	68.2	-16.9	1.94 H	333	49.4	1.9
2	*5795.00	109.5 PK			1.94 H	333	107.2	2.3
3	*5795.00	99.3 AV			1.94 H	333	97.0	2.3
4	#5942.98	60.8 PK	68.2	-7.4	1.94 H	333	58.2	2.6
5	11590.00	55.9 PK	74.0	-18.1	2.20 H	306	43.2	12.7
6	11590.00	46.5 AV	54.0	-7.5	2.20 H	306	33.8	12.7
7	#17385.00	44.9 PK	68.2	-23.3	2.63 H	345	27.3	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

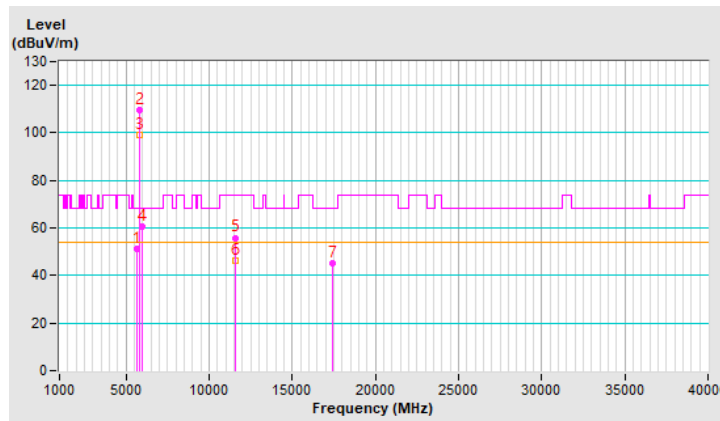


RF Mode	802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5625.56	51.6 PK	68.2	-16.6	1.19 V	55	49.7	1.9
2	*5795.00	110.6 PK			1.19 V	55	108.3	2.3
3	*5795.00	100.2 AV			1.19 V	55	97.9	2.3
4	#5943.79	57.0 PK	68.2	-11.2	1.19 V	55	54.4	2.6
5	11590.00	55.0 PK	74.0	-19.0	1.27 V	166	42.3	12.7
6	11590.00	45.4 AV	54.0	-8.6	1.27 V	166	32.7	12.7
7	#17385.00	44.4 PK	68.2	-23.8	1.22 V	187	26.8	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

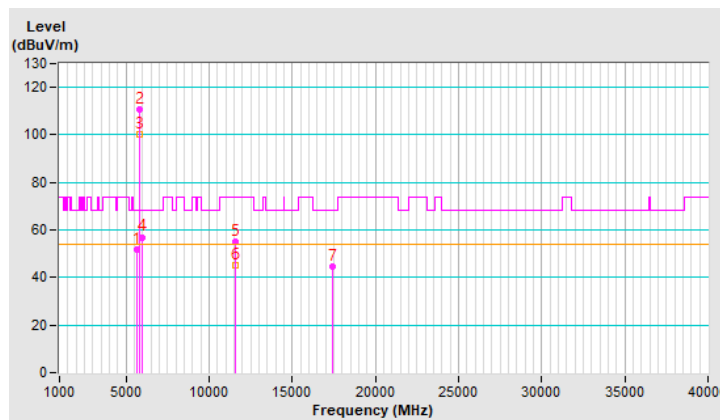


RF Mode	802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.8 PK	74.0	-10.2	1.97 H	289	61.8	2.0
2	5150.00	52.0 AV	54.0	-2.0	1.97 H	289	50.0	2.0
3	*5210.00	102.9 PK			1.97 H	289	101.1	1.8
4	*5210.00	93.0 AV			1.97 H	289	91.2	1.8
5	5350.00	46.9 PK	74.0	-27.1	1.97 H	289	45.2	1.7
6	5350.00	38.6 AV	54.0	-15.4	1.97 H	289	36.9	1.7
7	#10420.00	56.0 PK	68.2	-12.2	2.17 H	286	44.1	11.9
8	15630.00	44.8 PK	74.0	-29.2	2.62 H	354	33.1	11.7
9	15630.00	35.1 AV	54.0	-18.9	2.62 H	354	23.4	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

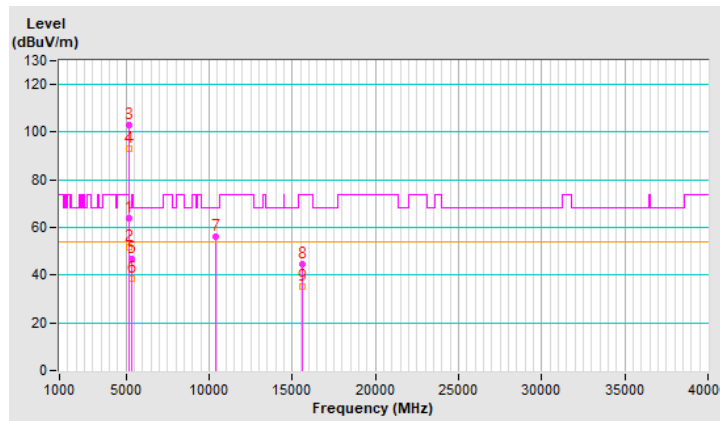


RF Mode	802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.6 PK	74.0	-8.4	1.21 V	17	63.6	2.0
2	5150.00	52.4 AV	54.0	-1.6	1.21 V	17	50.4	2.0
3	*5210.00	102.1 PK			1.21 V	17	100.3	1.8
4	*5210.00	92.1 AV			1.21 V	17	90.3	1.8
5	5350.00	51.3 PK	74.0	-22.7	1.21 V	17	49.6	1.7
6	5350.00	39.7 AV	54.0	-14.3	1.21 V	17	38.0	1.7
7	#10420.00	55.9 PK	68.2	-12.3	1.10 V	206	44.0	11.9
8	15630.00	46.3 PK	74.0	-27.7	1.03 V	191	34.6	11.7
9	15630.00	36.2 AV	54.0	-17.8	1.03 V	191	24.5	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

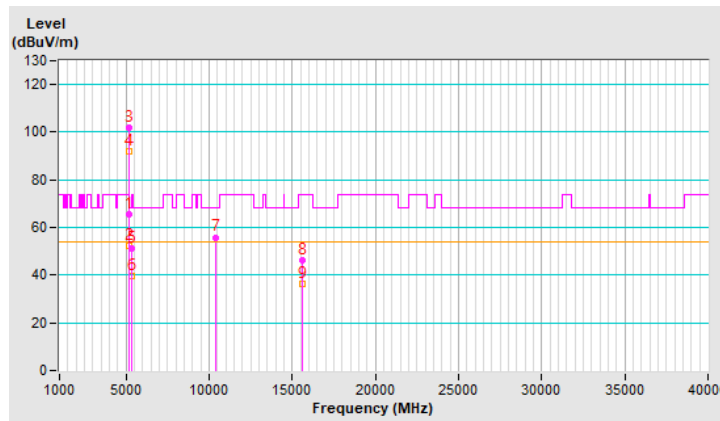


RF Mode	802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.4 PK	74.0	-23.6	2.02 H	305	48.4	2.0
2	5150.00	40.4 AV	54.0	-13.6	2.02 H	305	38.4	2.0
3	*5290.00	103.7 PK			2.02 H	305	102.2	1.5
4	*5290.00	93.4 AV			2.02 H	305	91.9	1.5
5	5350.00	64.8 PK	74.0	-9.2	2.02 H	305	63.1	1.7
6	5350.00	51.9 AV	54.0	-2.1	2.02 H	305	50.2	1.7
7	#10580.00	55.6 PK	68.2	-12.6	2.08 H	325	43.9	11.7
8	15870.00	44.8 PK	74.0	-29.2	2.53 H	338	33.8	11.0
9	15870.00	35.5 AV	54.0	-18.5	2.53 H	338	24.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

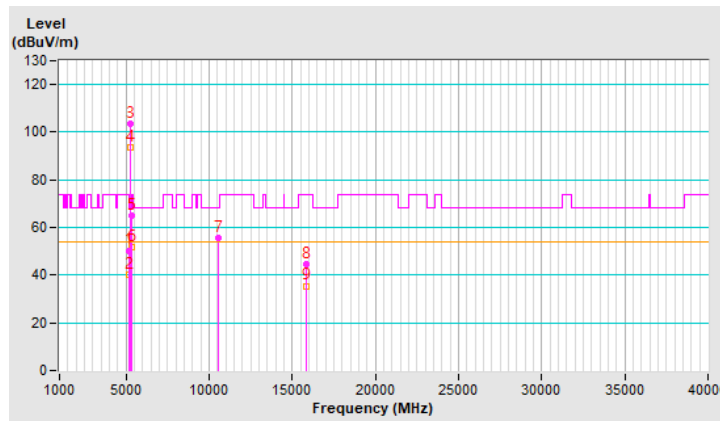


RF Mode	802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.3 PK	74.0	-22.7	1.05 V	15	49.3	2.0
2	5150.00	39.5 AV	54.0	-14.5	1.05 V	15	37.5	2.0
3	*5290.00	104.1 PK			1.05 V	15	102.6	1.5
4	*5290.00	92.6 AV			1.05 V	15	91.1	1.5
5	5350.00	65.7 PK	74.0	-8.3	1.05 V	15	64.0	1.7
6	5350.00	52.1 AV	54.0	-1.9	1.05 V	15	50.4	1.7
7	#10580.00	55.3 PK	68.2	-12.9	1.16 V	170	43.6	11.7
8	15870.00	44.6 PK	74.0	-29.4	1.25 V	205	33.6	11.0
9	15870.00	34.8 AV	54.0	-19.2	1.25 V	205	23.8	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

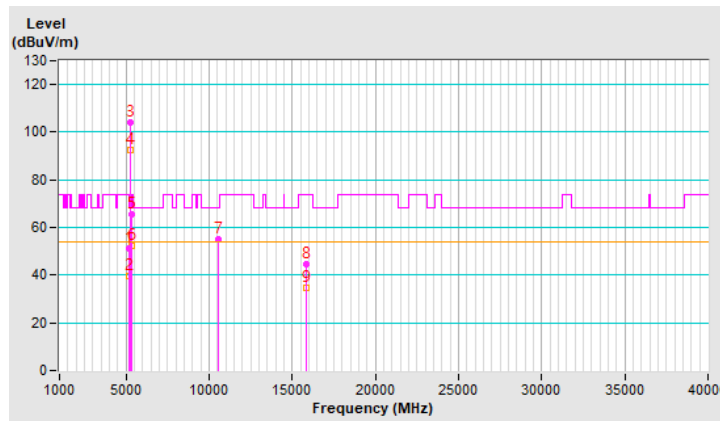


RF Mode	802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.0 PK	74.0	-10.0	2.12 H	329	62.2	1.8
2	5460.00	51.3 AV	54.0	-2.7	2.12 H	329	49.5	1.8
3	#5470.00	64.8 PK	68.2	-3.4	2.12 H	329	63.0	1.8
4	*5530.00	102.4 PK			2.12 H	329	100.7	1.7
5	*5530.00	93.4 AV			2.12 H	329	91.7	1.7
6	#5725.00	49.5 PK	68.2	-18.7	2.12 H	329	47.4	2.1
7	11060.00	56.3 PK	74.0	-17.7	2.25 H	319	44.0	12.3
8	11060.00	46.1 AV	54.0	-7.9	2.25 H	319	33.8	12.3
9	#16590.00	46.6 PK	68.2	-21.6	2.77 H	350	32.1	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

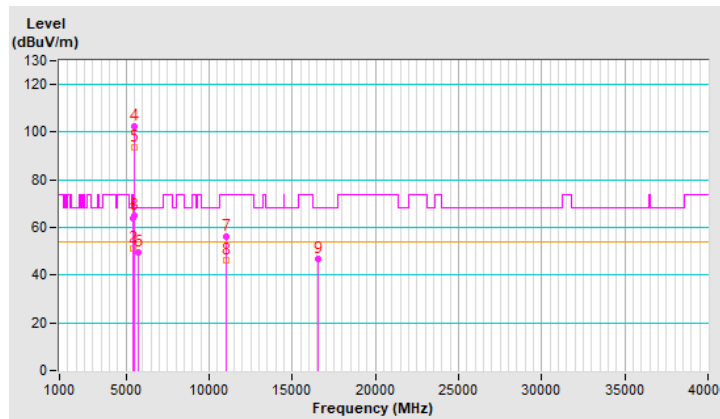


RF Mode	802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.8 PK	74.0	-9.2	1.30 V	18	63.0	1.8
2	5460.00	52.1 AV	54.0	-1.9	1.30 V	18	50.3	1.8
3	#5470.00	67.7 PK	68.2	-0.5	1.30 V	18	65.9	1.8
4	*5530.00	103.9 PK			1.30 V	18	102.2	1.7
5	*5530.00	93.4 AV			1.30 V	18	91.7	1.7
6	#5725.00	50.4 PK	68.2	-17.8	1.30 V	18	48.3	2.1
7	11060.00	55.6 PK	74.0	-18.4	1.07 V	226	43.3	12.3
8	11060.00	45.9 AV	54.0	-8.1	1.07 V	226	33.6	12.3
9	#16590.00	44.9 PK	68.2	-23.3	1.13 V	195	30.4	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

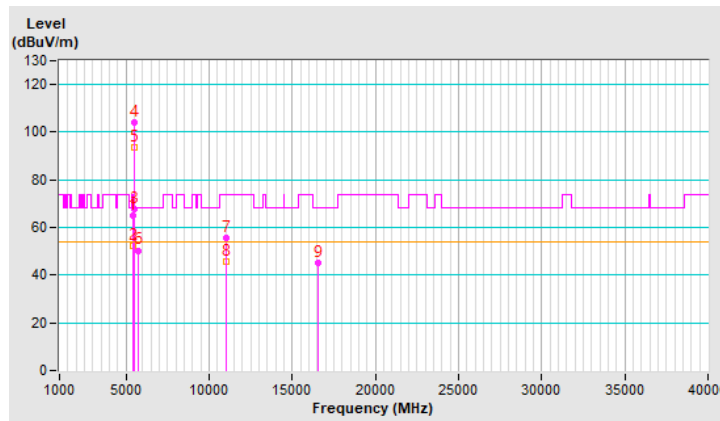


RF Mode	802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	106.2 PK			2.04 H	316	104.3	1.9
2	*5610.00	97.0 AV			2.04 H	316	95.1	1.9
3	#5725.00	62.1 PK	68.2	-6.1	2.04 H	316	60.0	2.1
4	11220.00	57.1 PK	74.0	-16.9	2.07 H	297	45.0	12.1
5	11220.00	46.8 AV	54.0	-7.2	2.07 H	297	34.7	12.1
6	#16830.00	44.0 PK	68.2	-24.2	2.54 H	360	28.5	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

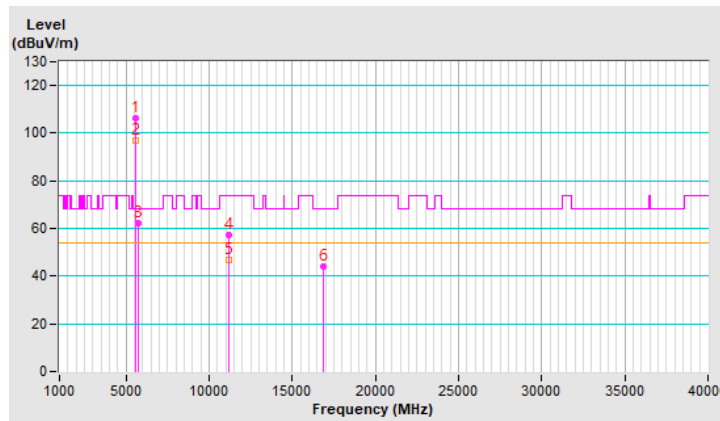


RF Mode	802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	106.2 PK			1.05 V	22	104.3	1.9
2	*5610.00	96.5 AV			1.05 V	22	94.6	1.9
3	#5725.00	66.2 PK	68.2	-2.0	1.05 V	22	64.1	2.1
4	11220.00	55.2 PK	74.0	-18.8	1.13 V	194	43.1	12.1
5	11220.00	45.6 AV	54.0	-8.4	1.13 V	194	33.5	12.1
6	#16830.00	44.6 PK	68.2	-23.6	1.35 V	176	29.1	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

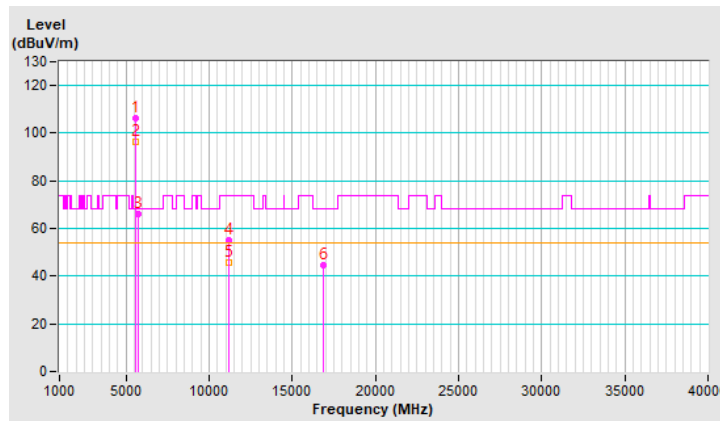


RF Mode	802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.0 PK	74.0	-21.0	1.99 H	317	51.2	1.8
2	5460.00	39.2 AV	54.0	-14.8	1.99 H	317	37.4	1.8
3	#5470.00	55.3 PK	68.2	-12.9	1.99 H	317	53.5	1.8
4	*5690.00	106.3 PK			1.99 H	317	104.3	2.0
5	*5690.00	95.4 AV			1.99 H	317	93.4	2.0
6	#5850.00	66.0 PK	68.2	-2.2	1.99 H	317	63.7	2.3
7	11380.00	54.7 PK	74.0	-19.3	2.32 H	302	42.0	12.7
8	11380.00	45.2 AV	54.0	-8.8	2.32 H	302	32.5	12.7
9	#17070.00	44.2 PK	68.2	-24.0	2.75 H	331	27.9	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

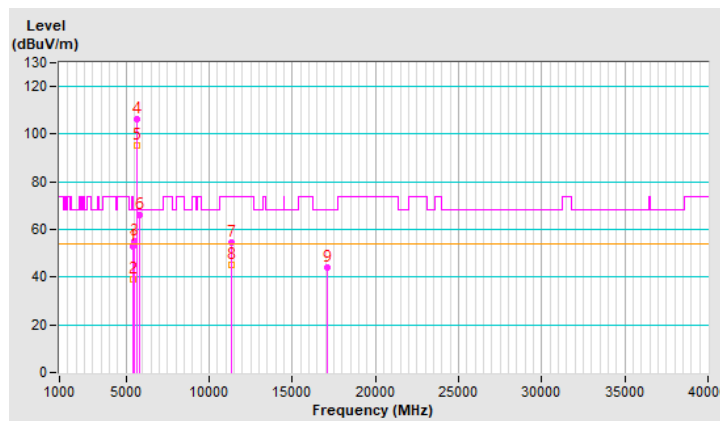


RF Mode	802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.6 PK	74.0	-21.4	1.18 V	22	50.8	1.8
2	5460.00	39.0 AV	54.0	-15.0	1.18 V	22	37.2	1.8
3	#5470.00	55.5 PK	68.2	-12.7	1.18 V	22	53.7	1.8
4	*5690.00	105.9 PK			1.18 V	22	103.9	2.0
5	*5690.00	95.1 AV			1.18 V	22	93.1	2.0
6	#5850.00	66.6 PK	68.2	-1.6	1.18 V	22	64.3	2.3
7	11380.00	56.2 PK	74.0	-17.8	1.00 V	192	43.5	12.7
8	11380.00	45.9 AV	54.0	-8.1	1.00 V	192	33.2	12.7
9	#17070.00	44.8 PK	68.2	-23.4	1.27 V	219	28.5	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

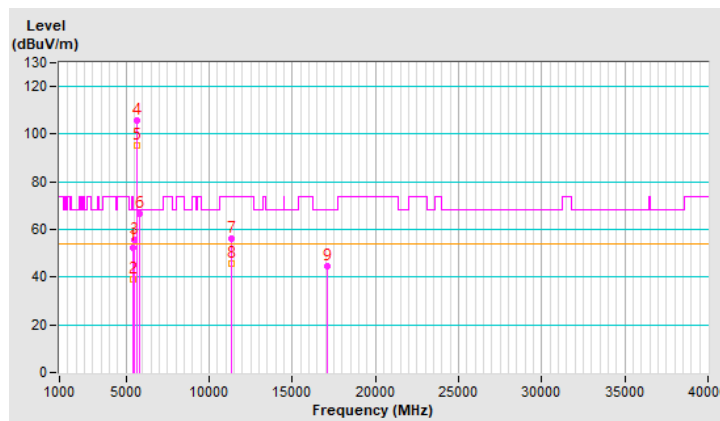


RF Mode	802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.40	61.5 PK	68.2	-6.7	2.09 H	299	59.6	1.9
2	*5775.00	108.3 PK			2.09 H	299	106.1	2.2
3	*5775.00	97.5 AV			2.09 H	299	95.3	2.2
4	#5929.50	62.4 PK	68.2	-5.8	2.09 H	299	59.9	2.5
5	11550.00	56.7 PK	74.0	-17.3	2.25 H	280	44.0	12.7
6	11550.00	47.3 AV	54.0	-6.7	2.25 H	280	34.6	12.7
7	#17325.00	45.1 PK	68.2	-23.1	2.64 H	360	28.1	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

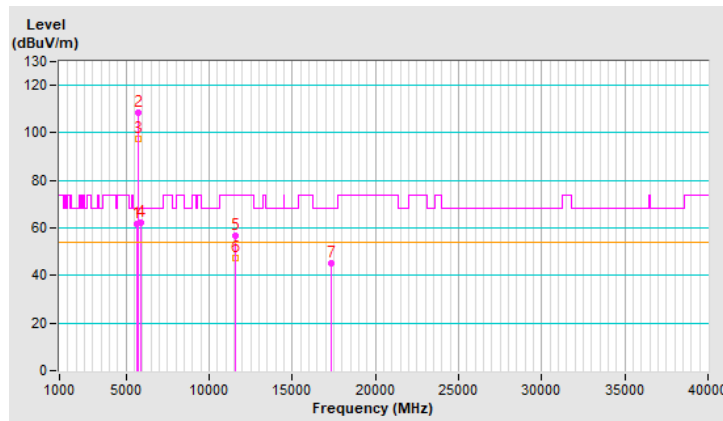


RF Mode	802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.12	66.2 PK	68.2	-2.0	1.15 V	16	64.3	1.9
2	*5775.00	108.2 PK			1.15 V	16	106.0	2.2
3	*5775.00	98.3 AV			1.15 V	16	96.1	2.2
4	#5933.11	65.8 PK	68.2	-2.4	1.15 V	16	63.3	2.5
5	11550.00	55.7 PK	74.0	-18.3	1.04 V	190	43.0	12.7
6	11550.00	46.1 AV	54.0	-7.9	1.04 V	190	33.4	12.7
7	#17325.00	44.9 PK	68.2	-23.3	1.30 V	191	27.9	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

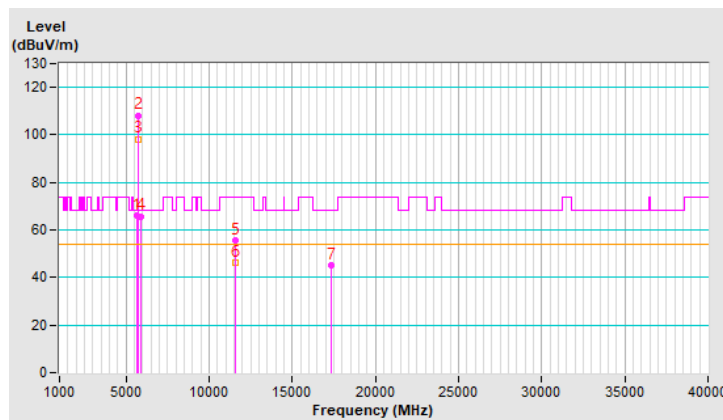


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.7 PK	74.0	-12.3	2.47 H	198	60.6	1.1
2	5150.00	49.8 AV	54.0	-4.2	2.47 H	198	48.7	1.1
3	*5180.00	116.5 PK			2.47 H	198	115.5	1.0
4	*5180.00	108.0 AV			2.47 H	198	107.0	1.0
5	#10360.00	55.0 PK	68.2	-13.2	2.57 H	205	43.8	11.2
6	15540.00	48.4 PK	74.0	-25.6	2.53 H	237	37.5	10.9
7	15540.00	31.7 AV	54.0	-22.3	2.53 H	237	20.8	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

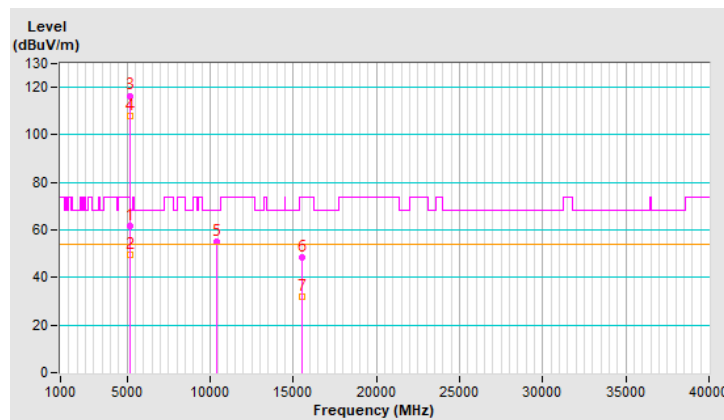


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	1.46 V	193	58.5	1.1
2	5150.00	52.3 AV	54.0	-1.7	1.46 V	193	51.2	1.1
3	*5180.00	119.2 PK			1.46 V	193	118.2	1.0
4	*5180.00	110.3 AV			1.46 V	193	109.3	1.0
5	#10360.00	61.4 PK	68.2	-6.8	1.42 V	179	50.2	11.2
6	15540.00	50.6 PK	74.0	-23.4	1.66 V	222	39.7	10.9
7	15540.00	34.9 AV	54.0	-19.1	1.66 V	222	24.0	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

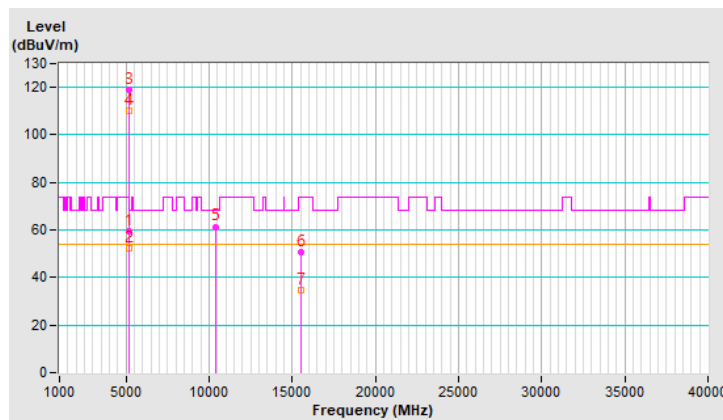

RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5119.20	53.4 PK	74.0	-20.6	2.45 H	218	52.3	1.1
2	5119.20	37.3 AV	54.0	-16.7	2.45 H	218	36.2	1.1
3	*5200.00	118.5 PK			2.45 H	218	117.6	0.9
4	*5200.00	109.9 AV			2.45 H	218	109.0	0.9
5	5414.20	51.0 PK	74.0	-23.0	2.45 H	218	50.2	0.8
6	5414.20	36.6 AV	54.0	-17.4	2.45 H	218	35.8	0.8
7	#10400.00	61.6 PK	68.2	-6.6	2.41 H	215	50.2	11.4
8	15600.00	54.2 PK	74.0	-19.8	2.52 H	251	43.5	10.7
9	15600.00	40.6 AV	54.0	-13.4	2.52 H	251	29.9	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

