


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 52 : 5260 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 5150.00         | 51.7 PK                 | 74.0           | -22.3       | 3.18 V             | 151                  | 49.7             | 2.0                      |
| 2  | 5150.00         | 39.4 AV                 | 54.0           | -14.6       | 3.18 V             | 151                  | 37.4             | 2.0                      |
| 3  | *5260.00        | 107.6 PK                |                |             | 3.18 V             | 151                  | 106.1            | 1.5                      |
| 4  | *5260.00        | 97.4 AV                 |                |             | 3.18 V             | 151                  | 95.9             | 1.5                      |
| 5  | #10520.00       | 55.9 PK                 | 68.2           | -12.3       | 3.14 V             | 86                   | 44.2             | 11.7                     |
| 6  | 15780.00        | 47.9 PK                 | 74.0           | -26.1       | 3.41 V             | 62                   | 36.6             | 11.3                     |
| 7  | 15780.00        | 33.5 AV                 | 54.0           | -20.5       | 3.41 V             | 62                   | 22.2             | 11.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

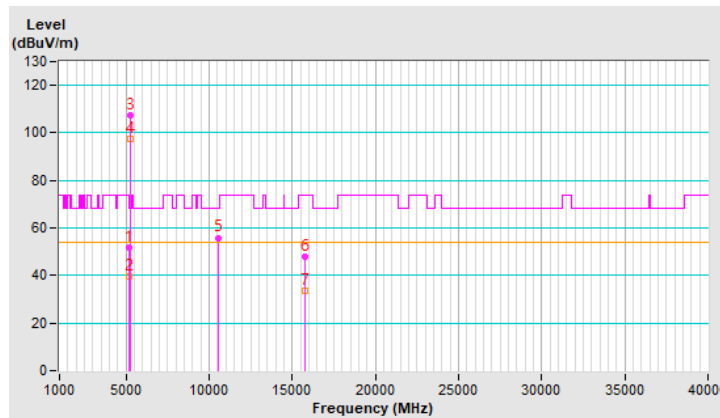


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 60 : 5300 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1  | *5300.00        | 120.5 PK                |                |             | 3.05 H             | 120                  | 119.0            | 1.5                      |
| 2  | *5300.00        | 110.2 AV                |                |             | 3.05 H             | 120                  | 108.7            | 1.5                      |
| 3  | 10600.00        | 60.4 PK                 | 74.0           | -13.6       | 1.57 H             | 130                  | 48.7             | 11.7                     |
| 4  | 10600.00        | 50.8 AV                 | 54.0           | -3.2        | 1.57 H             | 130                  | 39.1             | 11.7                     |
| 5  | 15900.00        | 50.7 PK                 | 74.0           | -23.3       | 2.47 H             | 104                  | 39.7             | 11.0                     |
| 6  | 15900.00        | 39.9 AV                 | 54.0           | -14.1       | 2.47 H             | 104                  | 28.9             | 11.0                     |

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

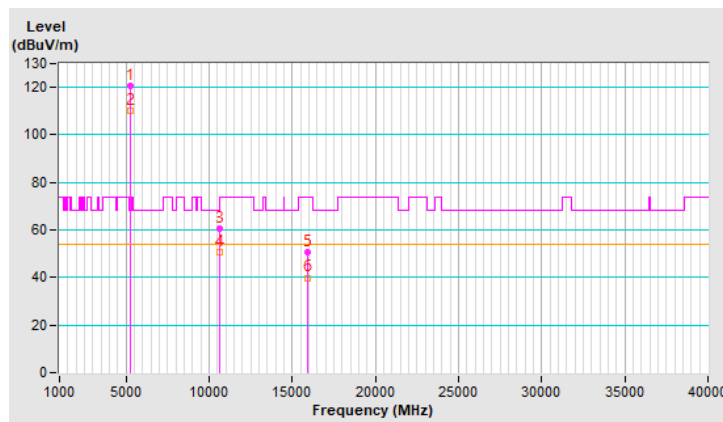


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 60 : 5300 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5300.00        | 109.2 PK                |                |             | 3.04 V             | 167                  | 107.7            | 1.5                      |
| 2  | *5300.00        | 98.6 AV                 |                |             | 3.04 V             | 167                  | 97.1             | 1.5                      |
| 3  | 10600.00        | 56.1 PK                 | 74.0           | -17.9       | 3.29 V             | 98                   | 44.4             | 11.7                     |
| 4  | 10600.00        | 46.1 AV                 | 54.0           | -7.9        | 3.29 V             | 98                   | 34.4             | 11.7                     |
| 5  | 15900.00        | 47.1 PK                 | 74.0           | -26.9       | 3.41 V             | 114                  | 36.1             | 11.0                     |
| 6  | 15900.00        | 36.0 AV                 | 54.0           | -18.0       | 3.41 V             | 114                  | 25.0             | 11.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

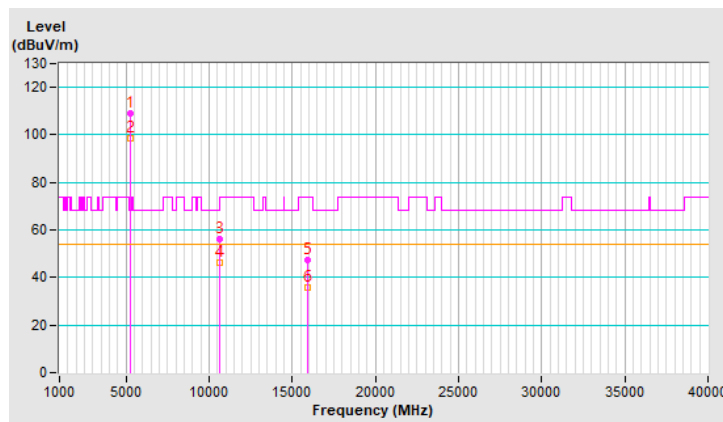


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 64 : 5320 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5320.00        | 114.3 PK                |                |             | 3.10 H             | 161                  | 112.7            | 1.6                      |
| 2  | *5320.00        | 105.3 AV                |                |             | 3.10 H             | 161                  | 103.7            | 1.6                      |
| 3  | 5350.00         | 71.3 PK                 | 74.0           | -2.7        | 3.10 H             | 161                  | 69.6             | 1.7                      |
| 4  | 5350.00         | 43.0 AV                 | 54.0           | -11.0       | 3.10 H             | 161                  | 41.3             | 1.7                      |
| 5  | 10640.00        | 57.3 PK                 | 74.0           | -16.7       | 1.81 H             | 228                  | 45.6             | 11.7                     |
| 6  | 10640.00        | 46.2 AV                 | 54.0           | -7.8        | 1.81 H             | 228                  | 34.5             | 11.7                     |
| 7  | 15960.00        | 52.0 PK                 | 74.0           | -22.0       | 1.96 H             | 95                   | 40.7             | 11.3                     |
| 8  | 15960.00        | 36.7 AV                 | 54.0           | -17.3       | 1.96 H             | 95                   | 25.4             | 11.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

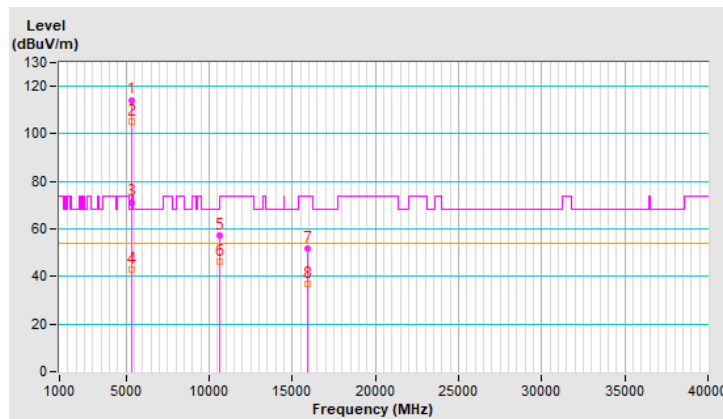


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 64 : 5320 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5320.00        | 107.7 PK                |                |             | 3.35 V             | 115                  | 106.1            | 1.6                      |
| 2  | *5320.00        | 97.9 AV                 |                |             | 3.35 V             | 115                  | 96.3             | 1.6                      |
| 3  | 5350.00         | 63.1 PK                 | 74.0           | -10.9       | 3.35 V             | 115                  | 61.4             | 1.7                      |
| 4  | 5350.00         | 41.8 AV                 | 54.0           | -12.2       | 3.35 V             | 115                  | 40.1             | 1.7                      |
| 5  | 10640.00        | 52.1 PK                 | 74.0           | -21.9       | 3.29 V             | 62                   | 40.4             | 11.7                     |
| 6  | 10640.00        | 42.3 AV                 | 54.0           | -11.7       | 3.29 V             | 62                   | 30.6             | 11.7                     |
| 7  | 15960.00        | 50.8 PK                 | 74.0           | -23.2       | 3.42 V             | 110                  | 39.5             | 11.3                     |
| 8  | 15960.00        | 35.8 AV                 | 54.0           | -18.2       | 3.42 V             | 110                  | 24.5             | 11.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

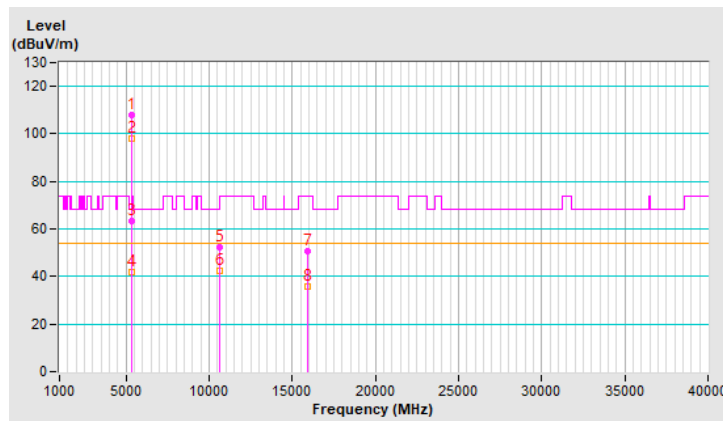


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 100 : 5500 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 5460.00         | 57.9 PK                 | 74.0           | -16.1       | 3.08 H             | 146                  | 56.1             | 1.8                      |
| 2  | 5460.00         | 43.1 AV                 | 54.0           | -10.9       | 3.08 H             | 146                  | 41.3             | 1.8                      |
| 3  | #5470.00        | 66.0 PK                 | 68.2           | -2.2        | 3.08 H             | 146                  | 64.2             | 1.8                      |
| 4  | *5500.00        | 116.2 PK                |                |             | 3.08 H             | 146                  | 114.5            | 1.7                      |
| 5  | *5500.00        | 106.8 AV                |                |             | 3.08 H             | 146                  | 105.1            | 1.7                      |
| 6  | 11000.00        | 55.5 PK                 | 74.0           | -18.5       | 1.56 H             | 210                  | 43.1             | 12.4                     |
| 7  | 11000.00        | 42.7 AV                 | 54.0           | -11.3       | 1.56 H             | 210                  | 30.3             | 12.4                     |
| 8  | #16500.00       | 54.8 PK                 | 68.2           | -13.4       | 3.09 H             | 110                  | 41.1             | 13.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

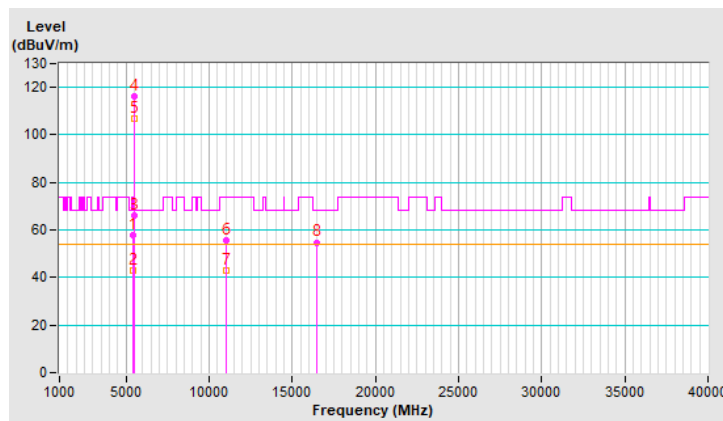


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 100 : 5500 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 5460.00         | 57.1 PK                 | 74.0           | -16.9       | 3.54 V             | 148                  | 55.3             | 1.8                      |
| 2  | 5460.00         | 39.2 AV                 | 54.0           | -14.8       | 3.54 V             | 148                  | 37.4             | 1.8                      |
| 3  | #5470.00        | 67.2 PK                 | 68.2           | -1.0        | 3.54 V             | 148                  | 65.4             | 1.8                      |
| 4  | *5500.00        | 111.6 PK                |                |             | 3.54 V             | 148                  | 109.9            | 1.7                      |
| 5  | *5500.00        | 102.1 AV                |                |             | 3.54 V             | 148                  | 100.4            | 1.7                      |
| 6  | 11000.00        | 54.5 PK                 | 74.0           | -19.5       | 3.27 V             | 101                  | 42.1             | 12.4                     |
| 7  | 11000.00        | 41.4 AV                 | 54.0           | -12.6       | 3.27 V             | 101                  | 29.0             | 12.4                     |
| 8  | #16500.00       | 53.3 PK                 | 68.2           | -14.9       | 3.40 V             | 127                  | 39.6             | 13.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

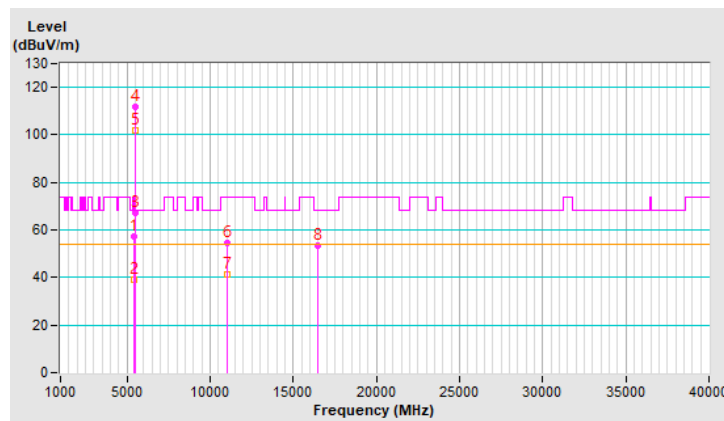


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 116 : 5580 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5580.00        | 120.9 PK                |                |             | 3.10 H             | 158                  | 119.1            | 1.8                      |
| 2  | *5580.00        | 109.9 AV                |                |             | 3.10 H             | 158                  | 108.1            | 1.8                      |
| 3  | 11160.00        | 58.3 PK                 | 74.0           | -15.7       | 1.62 H             | 217                  | 46.3             | 12.0                     |
| 4  | 11160.00        | 45.9 AV                 | 54.0           | -8.1        | 1.62 H             | 217                  | 33.9             | 12.0                     |
| 5  | #16740.00       | 58.2 PK                 | 68.2           | -10.0       | 3.21 H             | 125                  | 43.0             | 15.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

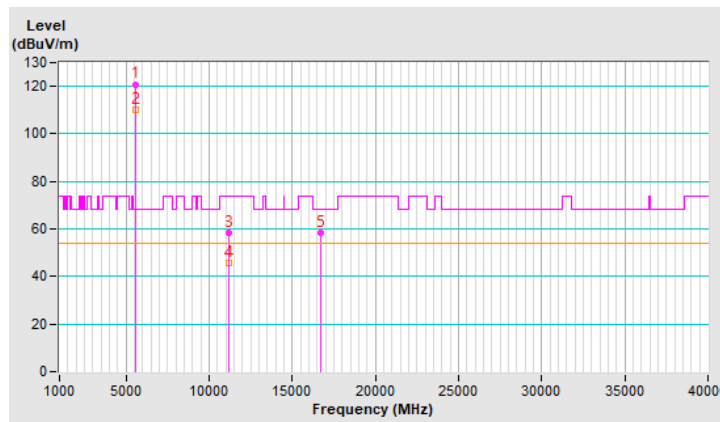




|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 116 : 5580 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5580.00        | 107.1 PK                |                |             | 3.27 V             | 135                  | 105.3            | 1.8                      |
| 2  | *5580.00        | 97.8 AV                 |                |             | 3.27 V             | 135                  | 96.0             | 1.8                      |
| 3  | 11160.00        | 55.2 PK                 | 74.0           | -18.8       | 3.15 V             | 98                   | 43.2             | 12.0                     |
| 4  | 11160.00        | 42.5 AV                 | 54.0           | -11.5       | 3.15 V             | 98                   | 30.5             | 12.0                     |
| 5  | #16740.00       | 52.6 PK                 | 68.2           | -15.6       | 3.23 V             | 90                   | 37.4             | 15.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

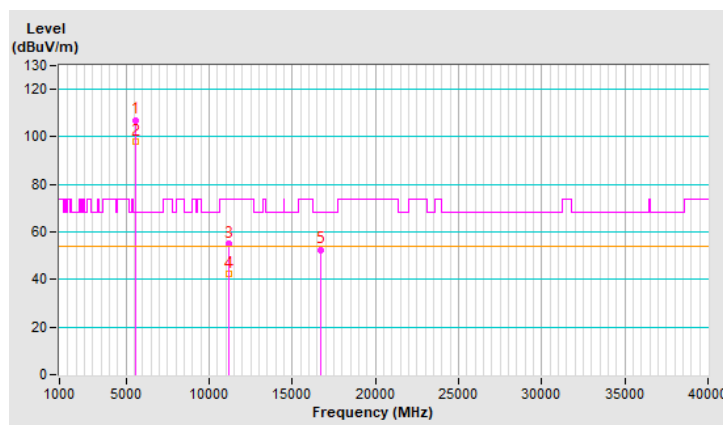


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 140 : 5700 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

**Antenna Polarity & Test Distance : Horizontal at 3 m**

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1  | *5700.00        | 117.0 PK                |                |             | 3.18 H             | 136                  | 115.0            | 2.0                      |
| 2  | *5700.00        | 107.9 AV                |                |             | 3.18 H             | 136                  | 105.9            | 2.0                      |
| 3  | #5725.00        | 65.8 PK                 | 68.2           | -2.4        | 3.18 H             | 136                  | 63.7             | 2.1                      |
| 4  | 11400.00        | 57.7 PK                 | 74.0           | -16.3       | 1.51 H             | 227                  | 45.0             | 12.7                     |
| 5  | 11400.00        | 45.1 AV                 | 54.0           | -8.9        | 1.51 H             | 227                  | 32.4             | 12.7                     |
| 6  | #17100.00       | 57.4 PK                 | 68.2           | -10.8       | 3.34 H             | 164                  | 41.1             | 16.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

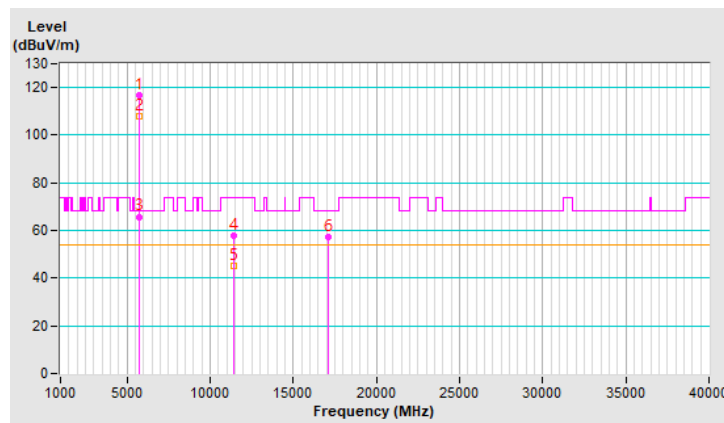


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 140 : 5700 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5700.00        | 106.5 PK                |                |             | 3.35 V             | 144                  | 104.5            | 2.0                      |
| 2  | *5700.00        | 96.7 AV                 |                |             | 3.35 V             | 144                  | 94.7             | 2.0                      |
| 3  | #5725.00        | 61.4 PK                 | 68.2           | -6.8        | 3.35 V             | 144                  | 59.3             | 2.1                      |
| 4  | 11400.00        | 54.1 PK                 | 74.0           | -19.9       | 3.62 V             | 54                   | 41.4             | 12.7                     |
| 5  | 11400.00        | 41.3 AV                 | 54.0           | -12.7       | 3.62 V             | 54                   | 28.6             | 12.7                     |
| 6  | #17100.00       | 52.7 PK                 | 68.2           | -15.5       | 3.47 V             | 75                   | 36.4             | 16.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

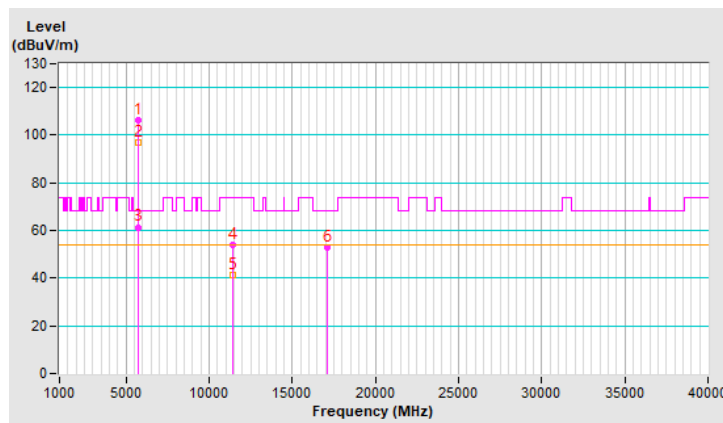


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 144 : 5720 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 5460.00         | 50.0 PK                 | 74.0           | -24.0       | 3.09 H             | 137                  | 48.2             | 1.8                      |
| 2  | 5460.00         | 39.6 AV                 | 54.0           | -14.4       | 3.09 H             | 137                  | 37.8             | 1.8                      |
| 3  | #5470.00        | 50.5 PK                 | 68.2           | -17.7       | 3.09 H             | 137                  | 48.7             | 1.8                      |
| 4  | *5720.00        | 118.0 PK                |                |             | 3.09 H             | 137                  | 115.9            | 2.1                      |
| 5  | *5720.00        | 108.0 AV                |                |             | 3.09 H             | 137                  | 105.9            | 2.1                      |
| 6  | #5850.00        | 50.5 PK                 | 68.2           | -17.7       | 3.09 H             | 137                  | 48.2             | 2.3                      |
| 7  | 11440.00        | 56.5 PK                 | 74.0           | -17.5       | 2.33 H             | 174                  | 43.8             | 12.7                     |
| 8  | 11440.00        | 42.3 AV                 | 54.0           | -11.7       | 2.33 H             | 174                  | 29.6             | 12.7                     |
| 9  | #17160.00       | 53.2 PK                 | 68.2           | -15.0       | 2.49 H             | 127                  | 36.9             | 16.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

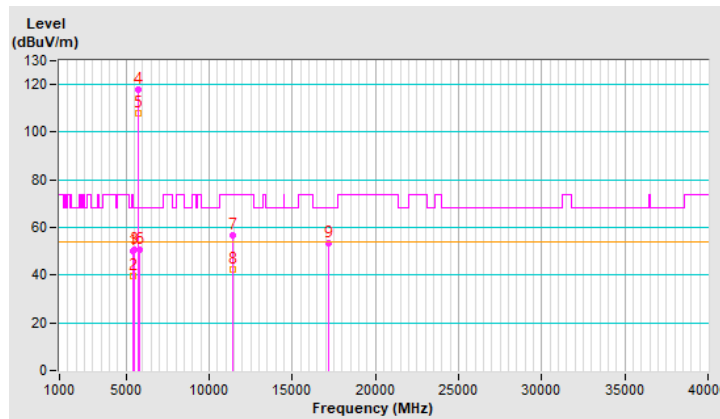


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 144 : 5720 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 5460.00         | 50.4 PK                 | 74.0           | -23.6       | 3.32 V             | 132                  | 48.6             | 1.8                      |
| 2  | 5460.00         | 38.0 AV                 | 54.0           | -16.0       | 3.32 V             | 132                  | 36.2             | 1.8                      |
| 3  | #5470.00        | 51.0 PK                 | 68.2           | -17.2       | 3.32 V             | 132                  | 49.2             | 1.8                      |
| 4  | *5720.00        | 107.4 PK                |                |             | 3.32 V             | 132                  | 105.3            | 2.1                      |
| 5  | *5720.00        | 97.9 AV                 |                |             | 3.32 V             | 132                  | 95.8             | 2.1                      |
| 6  | #5850.00        | 50.6 PK                 | 68.2           | -17.6       | 3.32 V             | 132                  | 48.3             | 2.3                      |
| 7  | 11440.00        | 51.4 PK                 | 74.0           | -22.6       | 3.08 V             | 87                   | 38.7             | 12.7                     |
| 8  | 11440.00        | 37.6 AV                 | 54.0           | -16.4       | 3.08 V             | 87                   | 24.9             | 12.7                     |
| 9  | #17160.00       | 50.8 PK                 | 68.2           | -17.4       | 3.37 V             | 100                  | 34.5             | 16.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

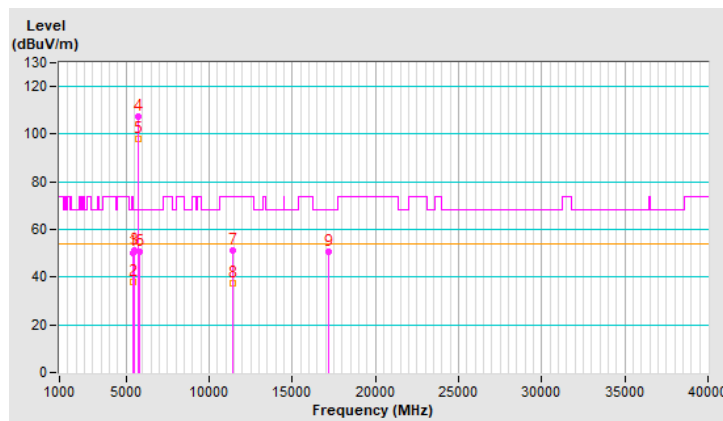


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 149 : 5745 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | #5638.27        | 56.4 PK                 | 68.2           | -11.8       | 3.33 H             | 172                  | 54.5             | 1.9                      |
| 2  | *5745.00        | 118.0 PK                |                |             | 3.33 H             | 172                  | 115.9            | 2.1                      |
| 3  | *5745.00        | 106.9 AV                |                |             | 3.33 H             | 172                  | 104.8            | 2.1                      |
| 4  | #6000.69        | 51.4 PK                 | 68.2           | -16.8       | 3.33 H             | 172                  | 48.8             | 2.6                      |
| 5  | 11490.00        | 59.0 PK                 | 74.0           | -15.0       | 2.73 H             | 169                  | 46.2             | 12.8                     |
| 6  | 11490.00        | 48.4 AV                 | 54.0           | -5.6        | 2.73 H             | 169                  | 35.6             | 12.8                     |
| 7  | #17235.00       | 55.4 PK                 | 68.2           | -12.8       | 1.41 H             | 206                  | 38.9             | 16.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

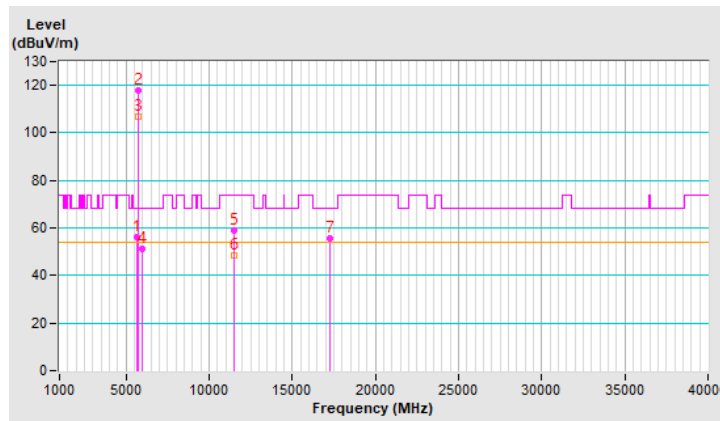


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 149 : 5745 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | #5597.10        | 51.6 PK                 | 68.2           | -16.6       | 3.58 V             | 125                  | 49.8             | 1.8                      |
| 2  | *5745.00        | 108.4 PK                |                |             | 3.58 V             | 125                  | 106.3            | 2.1                      |
| 3  | *5745.00        | 98.8 AV                 |                |             | 3.58 V             | 125                  | 96.7             | 2.1                      |
| 4  | #5960.99        | 51.4 PK                 | 68.2           | -16.8       | 3.58 V             | 125                  | 48.8             | 2.6                      |
| 5  | 11490.00        | 52.8 PK                 | 74.0           | -21.2       | 3.37 V             | 124                  | 40.0             | 12.8                     |
| 6  | 11490.00        | 43.4 AV                 | 54.0           | -10.6       | 3.37 V             | 124                  | 30.6             | 12.8                     |
| 7  | #17235.00       | 53.9 PK                 | 68.2           | -14.3       | 3.26 V             | 119                  | 37.4             | 16.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

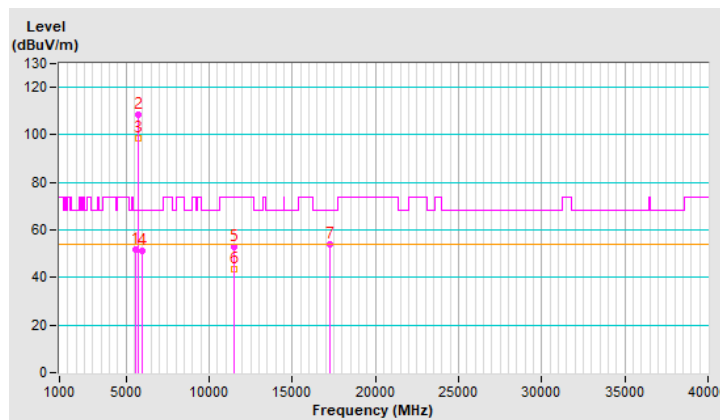


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 157 : 5785 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | #5604.38        | 50.5 PK                 | 68.2           | -17.7       | 3.21 H             | 166                  | 48.6             | 1.9                      |
| 2  | *5785.00        | 115.6 PK                |                |             | 3.21 H             | 166                  | 113.4            | 2.2                      |
| 3  | *5785.00        | 106.5 AV                |                |             | 3.21 H             | 166                  | 104.3            | 2.2                      |
| 4  | #5976.78        | 50.6 PK                 | 68.2           | -17.6       | 3.21 H             | 166                  | 48.0             | 2.6                      |
| 5  | 11570.00        | 56.9 PK                 | 74.0           | -17.1       | 2.60 H             | 152                  | 44.2             | 12.7                     |
| 6  | 11570.00        | 45.4 AV                 | 54.0           | -8.6        | 2.60 H             | 152                  | 32.7             | 12.7                     |
| 7  | #17355.00       | 57.3 PK                 | 68.2           | -10.9       | 3.31 H             | 152                  | 39.9             | 17.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

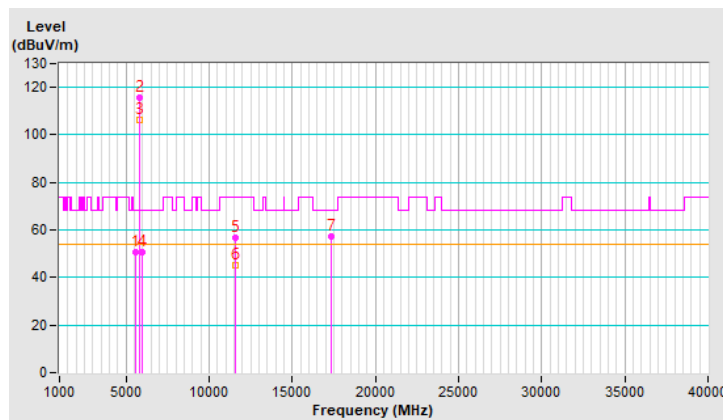




|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 157 : 5785 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | #5615.32        | 51.0 PK                 | 68.2           | -17.2       | 3.47 V             | 144                  | 49.1             | 1.9                      |
| 2  | *5785.00        | 110.3 PK                |                |             | 3.47 V             | 144                  | 108.1            | 2.2                      |
| 3  | *5785.00        | 100.1 AV                |                |             | 3.47 V             | 144                  | 97.9             | 2.2                      |
| 4  | #5943.18        | 51.2 PK                 | 68.2           | -17.0       | 3.47 V             | 144                  | 48.6             | 2.6                      |
| 5  | 11570.00        | 52.6 PK                 | 74.0           | -21.4       | 3.26 V             | 105                  | 39.9             | 12.7                     |
| 6  | 11570.00        | 43.4 AV                 | 54.0           | -10.6       | 3.26 V             | 105                  | 30.7             | 12.7                     |
| 7  | #17355.00       | 52.4 PK                 | 68.2           | -15.8       | 3.25 V             | 94                   | 35.0             | 17.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

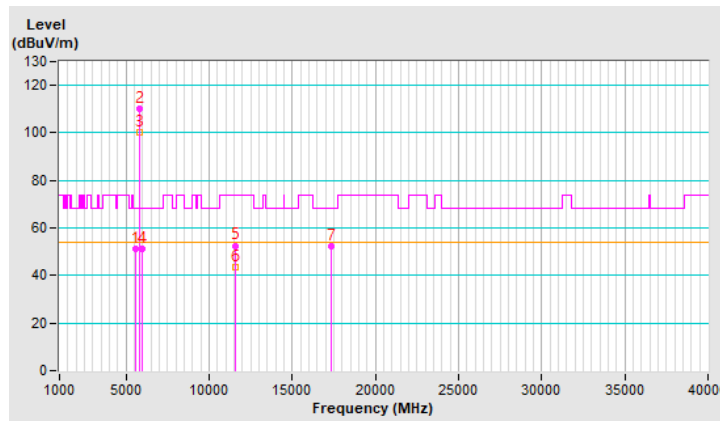


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 165 : 5825 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | #5633.85        | 51.1 PK                 | 68.2           | -17.1       | 3.11 H             | 145                  | 49.2             | 1.9                      |
| 2  | *5825.00        | 116.7 PK                |                |             | 3.11 H             | 145                  | 114.4            | 2.3                      |
| 3  | *5825.00        | 106.0 AV                |                |             | 3.11 H             | 145                  | 103.7            | 2.3                      |
| 4  | #6003.01        | 51.6 PK                 | 68.2           | -16.6       | 3.11 H             | 145                  | 49.0             | 2.6                      |
| 5  | 11650.00        | 59.1 PK                 | 74.0           | -14.9       | 2.42 H             | 190                  | 46.6             | 12.5                     |
| 6  | 11650.00        | 48.0 AV                 | 54.0           | -6.0        | 2.42 H             | 190                  | 35.5             | 12.5                     |
| 7  | #17475.00       | 62.0 PK                 | 68.2           | -6.2        | 3.67 H             | 172                  | 43.3             | 18.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

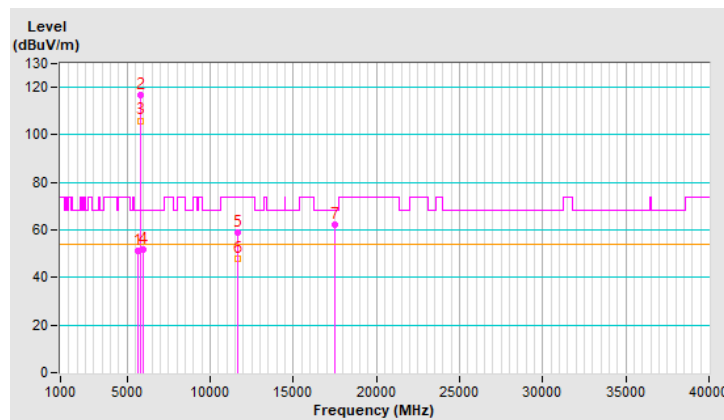


|                             |                                 |  |  |
|-----------------------------|---------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU52) | <b>Channel</b>                           | CH 165 : 5825 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                  | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                      |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | #5625.57        | 50.4 PK                 | 68.2           | -17.8       | 3.49 V             | 167                  | 48.5             | 1.9                      |
| 2  | *5825.00        | 108.8 PK                |                |             | 3.49 V             | 167                  | 106.5            | 2.3                      |
| 3  | *5825.00        | 98.9 AV                 |                |             | 3.49 V             | 167                  | 96.6             | 2.3                      |
| 4  | #5963.87        | 51.2 PK                 | 68.2           | -17.0       | 3.49 V             | 167                  | 48.6             | 2.6                      |
| 5  | 11650.00        | 52.9 PK                 | 74.0           | -21.1       | 3.37 V             | 98                   | 40.4             | 12.5                     |
| 6  | 11650.00        | 43.4 AV                 | 54.0           | -10.6       | 3.37 V             | 98                   | 30.9             | 12.5                     |
| 7  | #17475.00       | 59.6 PK                 | 68.2           | -8.6        | 3.13 V             | 40                   | 40.9             | 18.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

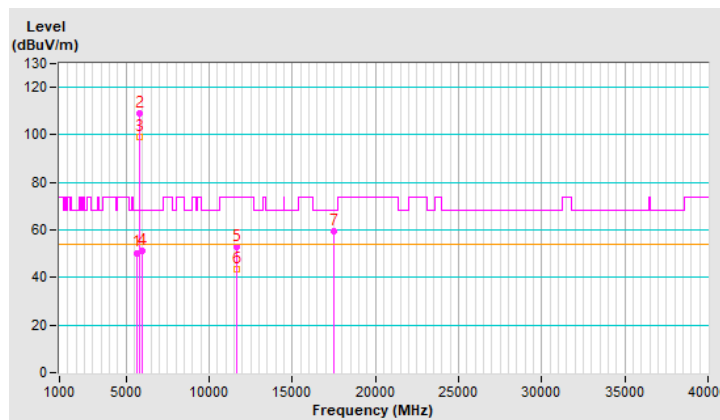


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 36 : 5180 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1  | 5150.00         | 71.0 PK                 | 74.0           | -3.0        | 3.05 H             | 200                  | 69.0             | 2.0                      |
| 2  | 5150.00         | 48.9 AV                 | 54.0           | -5.1        | 3.05 H             | 200                  | 46.9             | 2.0                      |
| 3  | *5180.00        | 116.5 PK                |                |             | 3.05 H             | 200                  | 114.6            | 1.9                      |
| 4  | *5180.00        | 105.8 AV                |                |             | 3.05 H             | 200                  | 103.9            | 1.9                      |
| 5  | #10360.00       | 55.9 PK                 | 68.2           | -12.3       | 1.59 H             | 256                  | 44.3             | 11.6                     |
| 6  | 15540.00        | 44.6 PK                 | 74.0           | -29.4       | 2.96 H             | 195                  | 32.8             | 11.8                     |
| 7  | 15540.00        | 34.2 AV                 | 54.0           | -19.8       | 2.96 H             | 195                  | 22.4             | 11.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

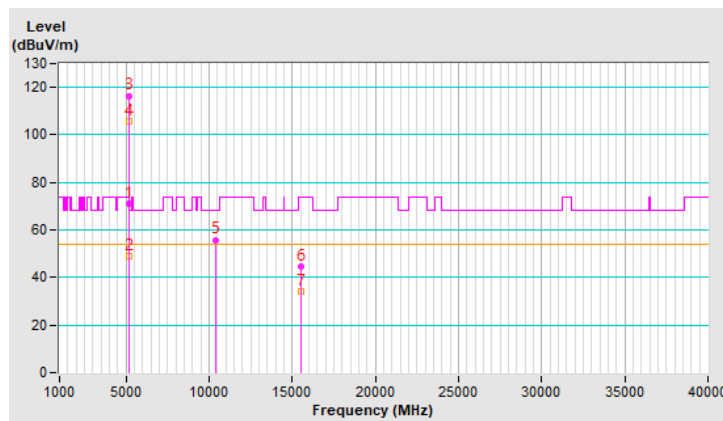


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 36 : 5180 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1  | 5150.00         | 59.5 PK                 | 74.0           | -14.5       | 3.52 V             | 160                  | 57.5             | 2.0                      |
| 2  | 5150.00         | 43.4 AV                 | 54.0           | -10.6       | 3.52 V             | 160                  | 41.4             | 2.0                      |
| 3  | *5180.00        | 107.8 PK                |                |             | 3.52 V             | 160                  | 105.9            | 1.9                      |
| 4  | *5180.00        | 98.3 AV                 |                |             | 3.52 V             | 160                  | 96.4             | 1.9                      |
| 5  | #10360.00       | 52.6 PK                 | 68.2           | -15.6       | 3.16 V             | 99                   | 41.0             | 11.6                     |
| 6  | 15540.00        | 42.7 PK                 | 74.0           | -31.3       | 3.06 V             | 90                   | 30.9             | 11.8                     |
| 7  | 15540.00        | 32.1 AV                 | 54.0           | -21.9       | 3.06 V             | 90                   | 20.3             | 11.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

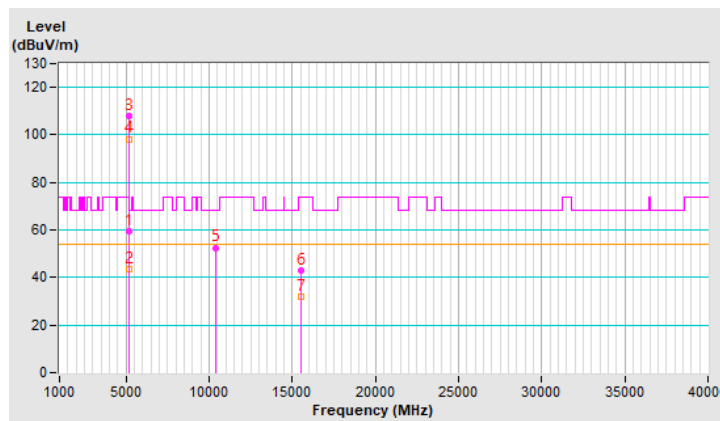


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 40 : 5200 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5200.00        | 118.5 PK                |                |             | 3.08 H             | 146                  | 116.7            | 1.8                      |
| 2  | *5200.00        | 108.5 AV                |                |             | 3.08 H             | 146                  | 106.7            | 1.8                      |
| 3  | #10400.00       | 58.9 PK                 | 68.2           | -9.3        | 1.61 H             | 246                  | 47.1             | 11.8                     |
| 4  | 15600.00        | 45.3 PK                 | 74.0           | -28.7       | 2.99 H             | 167                  | 33.6             | 11.7                     |
| 5  | 15600.00        | 34.9 AV                 | 54.0           | -19.1       | 2.99 H             | 167                  | 23.2             | 11.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

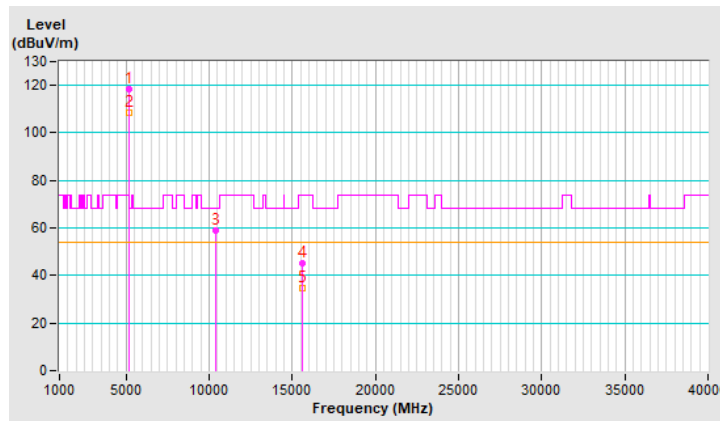


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 40 : 5200 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5200.00        | 105.4 PK                |                |             | 3.52 V             | 177                  | 103.6            | 1.8                      |
| 2  | *5200.00        | 95.6 AV                 |                |             | 3.52 V             | 177                  | 93.8             | 1.8                      |
| 3  | #10400.00       | 54.6 PK                 | 68.2           | -13.6       | 3.41 V             | 99                   | 42.8             | 11.8                     |
| 4  | 15600.00        | 41.5 PK                 | 74.0           | -32.5       | 3.28 V             | 94                   | 29.8             | 11.7                     |
| 5  | 15600.00        | 30.4 AV                 | 54.0           | -23.6       | 3.28 V             | 94                   | 18.7             | 11.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

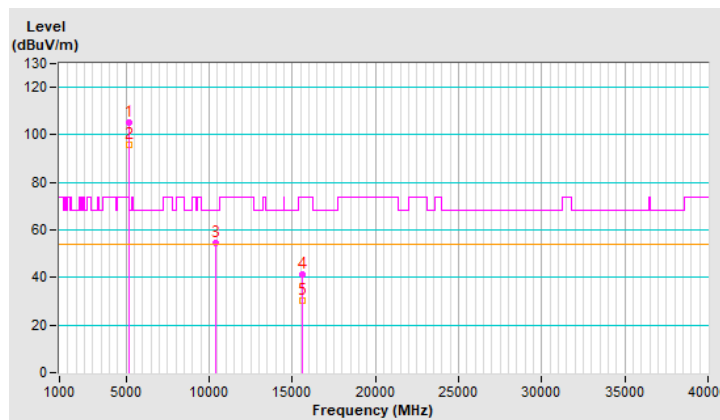


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 48 : 5240 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5240.00        | 119.1 PK                |                |             | 3.18 H             | 176                  | 117.4            | 1.7                      |
| 2  | *5240.00        | 109.4 AV                |                |             | 3.18 H             | 176                  | 107.7            | 1.7                      |
| 3  | 5350.00         | 50.1 PK                 | 74.0           | -23.9       | 3.18 H             | 176                  | 48.4             | 1.7                      |
| 4  | 5350.00         | 38.2 AV                 | 54.0           | -15.8       | 3.18 H             | 176                  | 36.5             | 1.7                      |
| 5  | #10480.00       | 59.7 PK                 | 68.2           | -8.5        | 1.63 H             | 244                  | 47.9             | 11.8                     |
| 6  | 15720.00        | 47.8 PK                 | 74.0           | -26.2       | 2.97 H             | 160                  | 36.2             | 11.6                     |
| 7  | 15720.00        | 36.4 AV                 | 54.0           | -17.6       | 2.97 H             | 160                  | 24.8             | 11.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

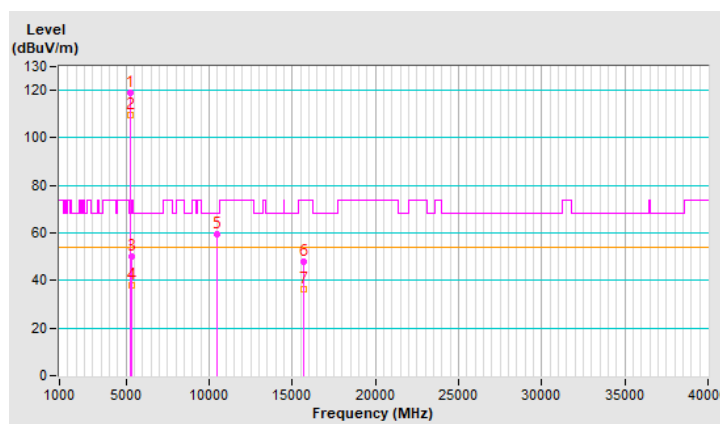




|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 48 : 5240 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5240.00        | 106.6 PK                |                |             | 3.46 V             | 143                  | 104.9            | 1.7                      |
| 2  | *5240.00        | 97.1 AV                 |                |             | 3.46 V             | 143                  | 95.4             | 1.7                      |
| 3  | 5350.00         | 50.7 PK                 | 74.0           | -23.3       | 3.46 V             | 143                  | 49.0             | 1.7                      |
| 4  | 5350.00         | 38.6 AV                 | 54.0           | -15.4       | 3.46 V             | 143                  | 36.9             | 1.7                      |
| 5  | #10480.00       | 54.8 PK                 | 68.2           | -13.4       | 3.43 V             | 85                   | 43.0             | 11.8                     |
| 6  | 15720.00        | 44.2 PK                 | 74.0           | -29.8       | 3.44 V             | 111                  | 32.6             | 11.6                     |
| 7  | 15720.00        | 32.9 AV                 | 54.0           | -21.1       | 3.44 V             | 111                  | 21.3             | 11.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

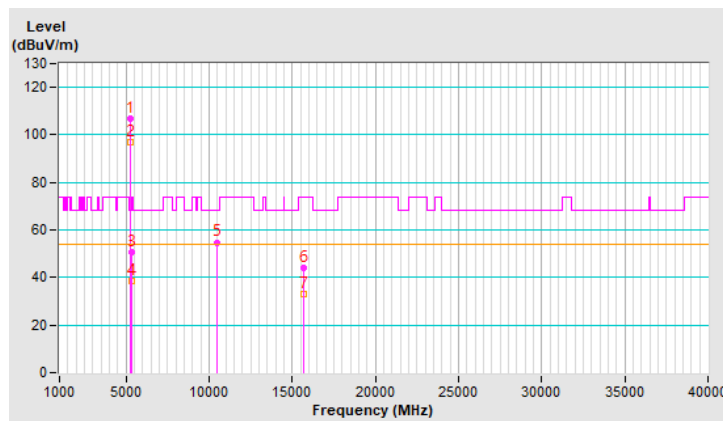


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 52 : 5260 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 5150.00         | 50.6 PK                 | 74.0           | -23.4       | 3.28 H             | 141                  | 48.6             | 2.0                      |
| 2  | 5150.00         | 38.1 AV                 | 54.0           | -15.9       | 3.28 H             | 141                  | 36.1             | 2.0                      |
| 3  | *5260.00        | 117.6 PK                |                |             | 3.28 H             | 141                  | 116.1            | 1.5                      |
| 4  | *5260.00        | 107.1 AV                |                |             | 3.28 H             | 141                  | 105.6            | 1.5                      |
| 5  | #10520.00       | 58.1 PK                 | 68.2           | -10.1       | 1.56 H             | 180                  | 46.4             | 11.7                     |
| 6  | 15780.00        | 47.5 PK                 | 74.0           | -26.5       | 3.02 H             | 165                  | 36.2             | 11.3                     |
| 7  | 15780.00        | 36.6 AV                 | 54.0           | -17.4       | 3.02 H             | 165                  | 25.3             | 11.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

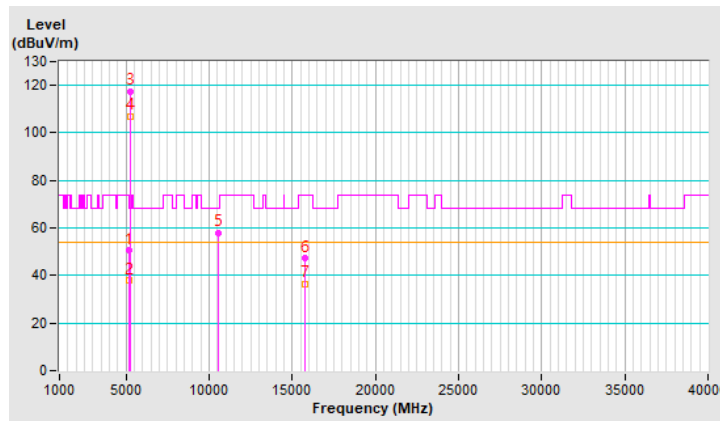


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 52 : 5260 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 5150.00         | 51.6 PK                 | 74.0           | -22.4       | 3.41 V             | 152                  | 49.6             | 2.0                      |
| 2  | 5150.00         | 39.2 AV                 | 54.0           | -14.8       | 3.41 V             | 152                  | 37.2             | 2.0                      |
| 3  | *5260.00        | 107.3 PK                |                |             | 3.41 V             | 152                  | 105.8            | 1.5                      |
| 4  | *5260.00        | 97.3 AV                 |                |             | 3.41 V             | 152                  | 95.8             | 1.5                      |
| 5  | #10520.00       | 55.9 PK                 | 68.2           | -12.3       | 3.61 V             | 110                  | 44.2             | 11.7                     |
| 6  | 15780.00        | 44.5 PK                 | 74.0           | -29.5       | 3.51 V             | 96                   | 33.2             | 11.3                     |
| 7  | 15780.00        | 32.8 AV                 | 54.0           | -21.2       | 3.51 V             | 96                   | 21.5             | 11.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

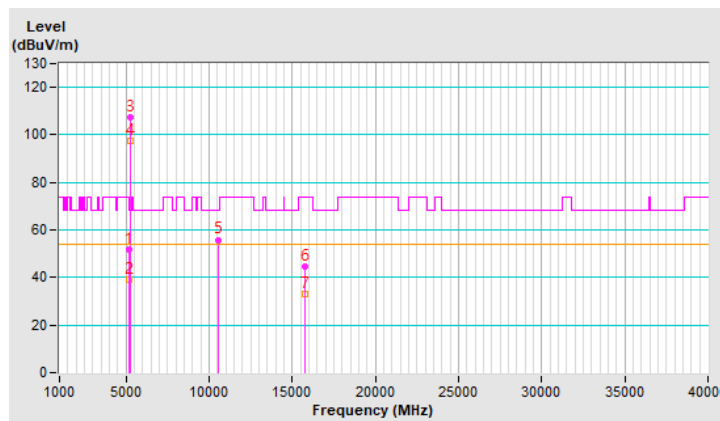


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 60 : 5300 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1  | *5300.00        | 119.4 PK                |                |             | 3.08 H             | 173                  | 117.9            | 1.5                      |
| 2  | *5300.00        | 110.0 AV                |                |             | 3.08 H             | 173                  | 108.5            | 1.5                      |
| 3  | 10600.00        | 60.1 PK                 | 74.0           | -13.9       | 1.55 H             | 201                  | 48.4             | 11.7                     |
| 4  | 10600.00        | 50.7 AV                 | 54.0           | -3.3        | 1.55 H             | 201                  | 39.0             | 11.7                     |
| 5  | 15900.00        | 47.3 PK                 | 74.0           | -26.7       | 3.24 H             | 172                  | 36.3             | 11.0                     |
| 6  | 15900.00        | 36.9 AV                 | 54.0           | -17.1       | 3.24 H             | 172                  | 25.9             | 11.0                     |

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

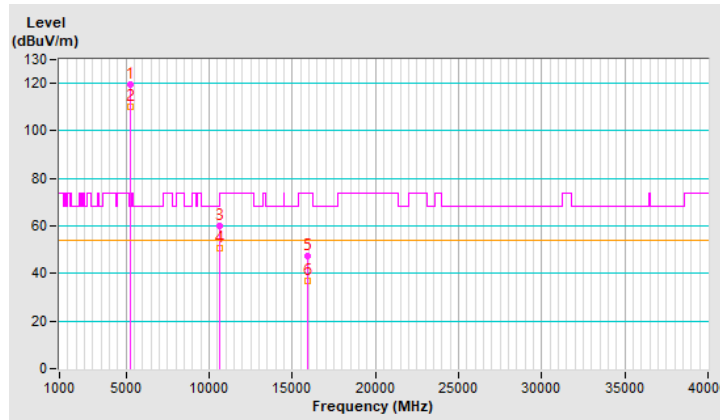


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 60 : 5300 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5300.00        | 106.6 PK                |                |             | 3.60 V             | 94                   | 105.1            | 1.5                      |
| 2  | *5300.00        | 96.1 AV                 |                |             | 3.60 V             | 94                   | 94.6             | 1.5                      |
| 3  | 10600.00        | 55.7 PK                 | 74.0           | -18.3       | 3.50 V             | 107                  | 44.0             | 11.7                     |
| 4  | 10600.00        | 45.8 AV                 | 54.0           | -8.2        | 3.50 V             | 107                  | 34.1             | 11.7                     |
| 5  | 15900.00        | 43.7 PK                 | 74.0           | -30.3       | 3.46 V             | 110                  | 32.7             | 11.0                     |
| 6  | 15900.00        | 33.1 AV                 | 54.0           | -20.9       | 3.46 V             | 110                  | 22.1             | 11.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

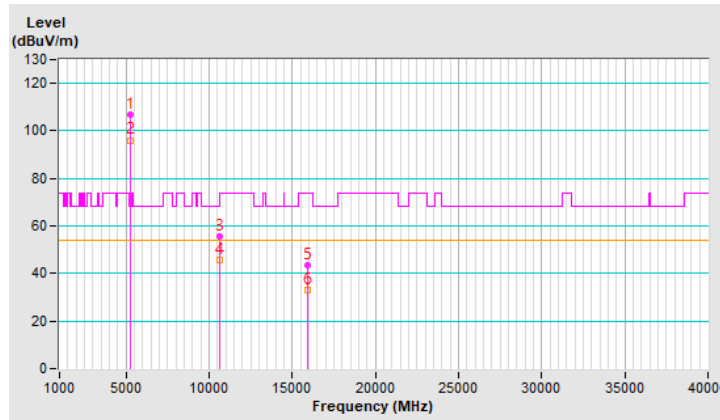


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 64 : 5320 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5320.00        | 116.6 PK                |                |             | 2.96 H             | 156                  | 115.0            | 1.6                      |
| 2  | *5320.00        | 105.2 AV                |                |             | 2.96 H             | 156                  | 103.6            | 1.6                      |
| 3  | 5350.00         | 72.5 PK                 | 74.0           | -1.5        | 2.96 H             | 156                  | 70.8             | 1.7                      |
| 4  | 5350.00         | 47.6 AV                 | 54.0           | -6.4        | 2.96 H             | 156                  | 45.9             | 1.7                      |
| 5  | 10640.00        | 51.5 PK                 | 74.0           | -22.5       | 1.61 H             | 220                  | 39.8             | 11.7                     |
| 6  | 10640.00        | 41.1 AV                 | 54.0           | -12.9       | 1.61 H             | 220                  | 29.4             | 11.7                     |
| 7  | 15960.00        | 44.1 PK                 | 74.0           | -29.9       | 3.08 H             | 180                  | 32.8             | 11.3                     |
| 8  | 15960.00        | 34.5 AV                 | 54.0           | -19.5       | 3.08 H             | 180                  | 23.2             | 11.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

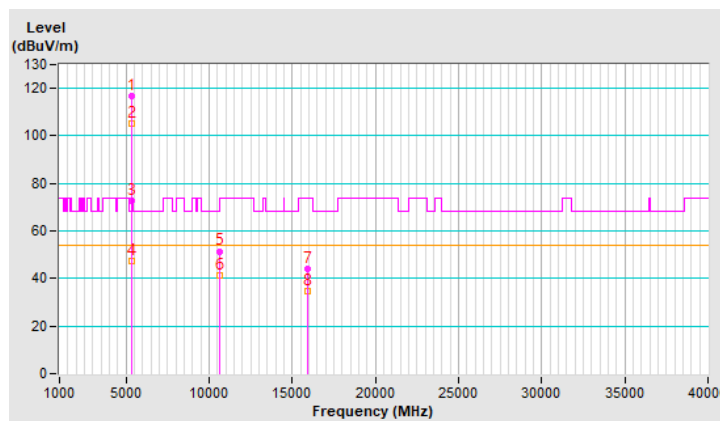


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 64 : 5320 MHz   |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5320.00        | 106.4 PK                |                |             | 3.34 V             | 122                  | 104.8            | 1.6                      |
| 2  | *5320.00        | 96.0 AV                 |                |             | 3.34 V             | 122                  | 94.4             | 1.6                      |
| 3  | 5350.00         | 58.1 PK                 | 74.0           | -15.9       | 3.34 V             | 122                  | 56.4             | 1.7                      |
| 4  | 5350.00         | 38.6 AV                 | 54.0           | -15.4       | 3.34 V             | 122                  | 36.9             | 1.7                      |
| 5  | 10640.00        | 47.1 PK                 | 74.0           | -26.9       | 3.33 V             | 68                   | 35.4             | 11.7                     |
| 6  | 10640.00        | 37.4 AV                 | 54.0           | -16.6       | 3.33 V             | 68                   | 25.7             | 11.7                     |
| 7  | 15960.00        | 43.1 PK                 | 74.0           | -30.9       | 3.57 V             | 93                   | 31.8             | 11.3                     |
| 8  | 15960.00        | 34.4 AV                 | 54.0           | -19.6       | 3.57 V             | 93                   | 23.1             | 11.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

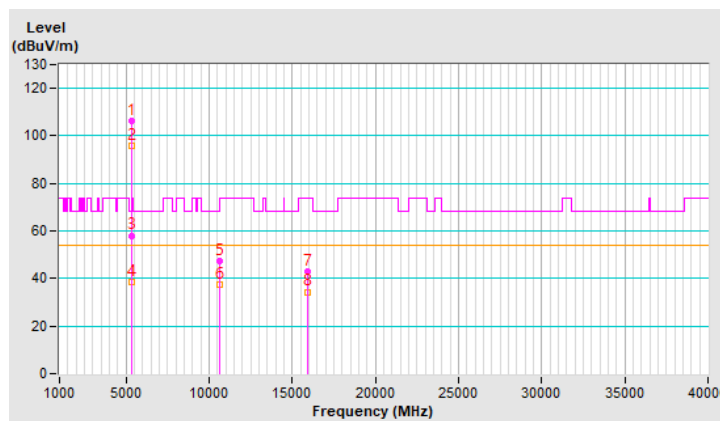


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 100 : 5500 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 28°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 5460.00         | 61.3 PK                 | 74.0           | -12.7       | 3.06 H             | 186                  | 60.3             | 1.0                      |
| 2  | 5460.00         | 41.8 AV                 | 54.0           | -12.2       | 3.06 H             | 186                  | 40.8             | 1.0                      |
| 3  | #5470.00        | 64.2 PK                 | 68.2           | -4.0        | 3.06 H             | 186                  | 63.2             | 1.0                      |
| 4  | *5500.00        | 113.9 PK                |                |             | 3.06 H             | 186                  | 112.9            | 1.0                      |
| 5  | *5500.00        | 103.7 AV                |                |             | 3.06 H             | 186                  | 102.7            | 1.0                      |
| 6  | 11000.00        | 53.7 PK                 | 74.0           | -20.3       | 1.42 H             | 274                  | 41.8             | 11.9                     |
| 7  | 11000.00        | 43.0 AV                 | 54.0           | -11.0       | 1.42 H             | 274                  | 31.1             | 11.9                     |
| 8  | #16500.00       | 52.4 PK                 | 68.2           | -15.8       | 1.47 H             | 233                  | 39.5             | 12.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

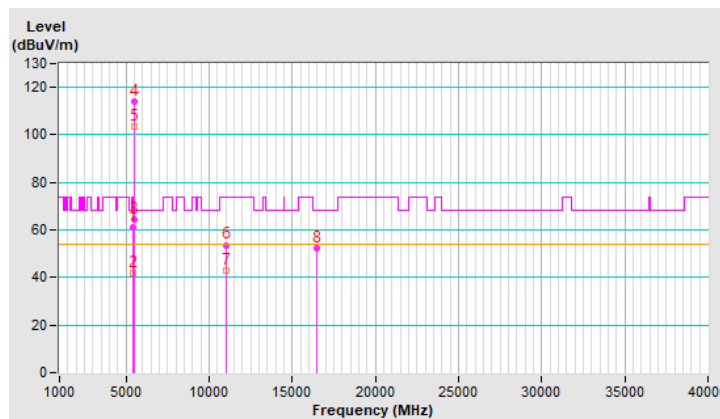




|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 100 : 5500 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 5460.00         | 57.8 PK                 | 74.0           | -16.2       | 3.45 V             | 159                  | 56.0             | 1.8                      |
| 2  | 5460.00         | 38.2 AV                 | 54.0           | -15.8       | 3.45 V             | 159                  | 36.4             | 1.8                      |
| 3  | #5470.00        | 60.3 PK                 | 68.2           | -7.9        | 3.45 V             | 159                  | 58.5             | 1.8                      |
| 4  | *5500.00        | 107.1 PK                |                |             | 3.45 V             | 159                  | 105.4            | 1.7                      |
| 5  | *5500.00        | 97.8 AV                 |                |             | 3.45 V             | 159                  | 96.1             | 1.7                      |
| 6  | 11000.00        | 49.6 PK                 | 74.0           | -24.4       | 3.17 V             | 53                   | 37.2             | 12.4                     |
| 7  | 11000.00        | 38.6 AV                 | 54.0           | -15.4       | 3.17 V             | 53                   | 26.2             | 12.4                     |
| 8  | #16500.00       | 52.0 PK                 | 68.2           | -16.2       | 3.29 V             | 82                   | 38.3             | 13.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

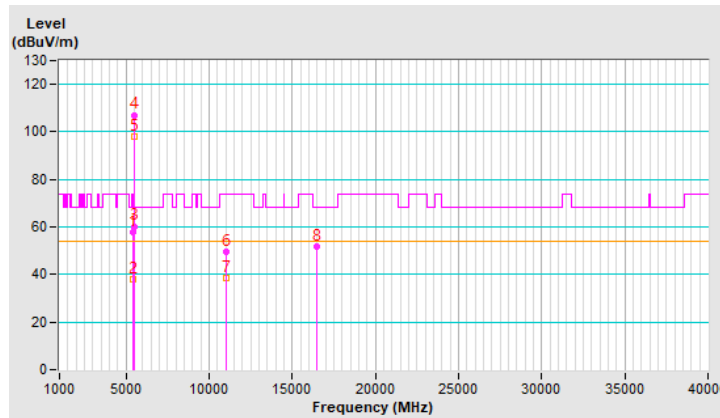


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 116 : 5580 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5580.00        | 114.4 PK                |                |             | 3.10 H             | 197                  | 112.6            | 1.8                      |
| 2  | *5580.00        | 105.0 AV                |                |             | 3.10 H             | 197                  | 103.2            | 1.8                      |
| 3  | 11160.00        | 54.7 PK                 | 74.0           | -19.3       | 1.39 H             | 218                  | 42.7             | 12.0                     |
| 4  | 11160.00        | 44.1 AV                 | 54.0           | -9.9        | 1.39 H             | 218                  | 32.1             | 12.0                     |
| 5  | #16740.00       | 53.5 PK                 | 68.2           | -14.7       | 1.44 H             | 246                  | 38.3             | 15.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

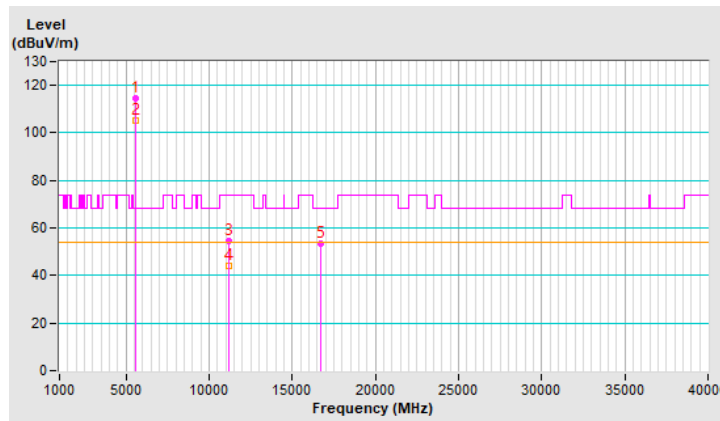


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 116 : 5580 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5580.00        | 103.0 PK                |                |             | 3.58 V             | 155                  | 101.2            | 1.8                      |
| 2  | *5580.00        | 93.0 AV                 |                |             | 3.58 V             | 155                  | 91.2             | 1.8                      |
| 3  | 11160.00        | 50.6 PK                 | 74.0           | -23.4       | 3.33 V             | 88                   | 38.6             | 12.0                     |
| 4  | 11160.00        | 39.5 AV                 | 54.0           | -14.5       | 3.33 V             | 88                   | 27.5             | 12.0                     |
| 5  | #16740.00       | 48.2 PK                 | 68.2           | -20.0       | 3.37 V             | 77                   | 33.0             | 15.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

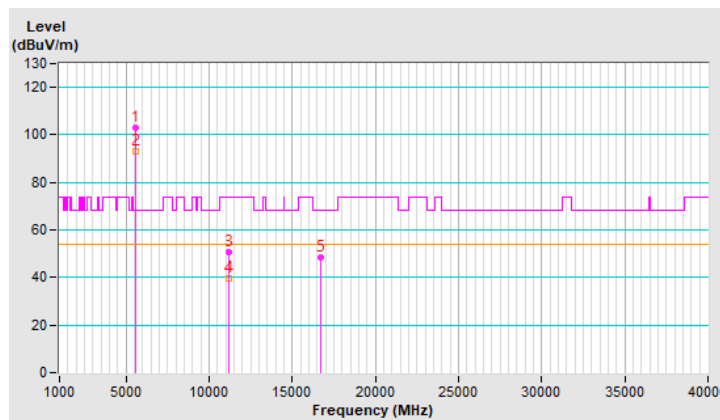


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 140 : 5700 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 28°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5700.00        | 119.1 PK                |                |             | 3.05 H             | 135                  | 117.7            | 1.4                      |
| 2  | *5700.00        | 109.6 AV                |                |             | 3.05 H             | 135                  | 108.2            | 1.4                      |
| 3  | #5725.00        | 66.0 PK                 | 68.2           | -2.2        | 3.05 H             | 135                  | 64.5             | 1.5                      |
| 4  | 11400.00        | 57.7 PK                 | 74.0           | -16.3       | 1.37 H             | 240                  | 45.8             | 11.9                     |
| 5  | 11400.00        | 44.5 AV                 | 54.0           | -9.5        | 1.37 H             | 240                  | 32.6             | 11.9                     |
| 6  | #17100.00       | 57.5 PK                 | 68.2           | -10.7       | 3.26 H             | 135                  | 42.6             | 14.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

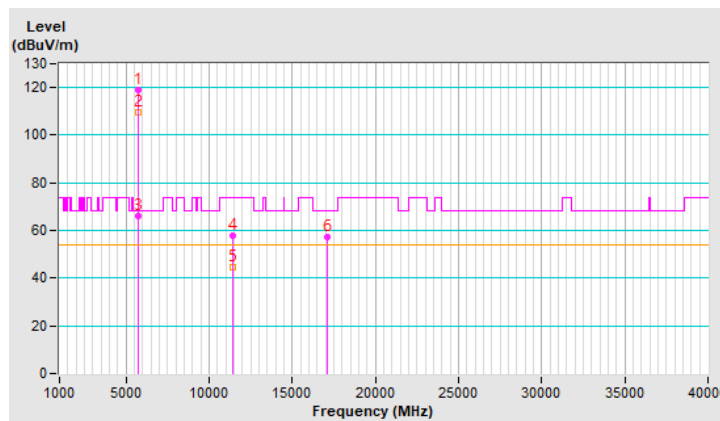


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 140 : 5700 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 28°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *5700.00        | 106.7 PK                |                |             | 3.43 V             | 160                  | 105.3            | 1.4                      |
| 2  | *5700.00        | 96.7 AV                 |                |             | 3.43 V             | 160                  | 95.3             | 1.4                      |
| 3  | #5725.00        | 62.9 PK                 | 68.2           | -5.3        | 3.43 V             | 160                  | 61.4             | 1.5                      |
| 4  | 11400.00        | 54.2 PK                 | 74.0           | -19.8       | 3.54 V             | 93                   | 42.3             | 11.9                     |
| 5  | 11400.00        | 41.6 AV                 | 54.0           | -12.4       | 3.54 V             | 93                   | 29.7             | 11.9                     |
| 6  | #17100.00       | 51.8 PK                 | 68.2           | -16.4       | 3.44 V             | 95                   | 36.9             | 14.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

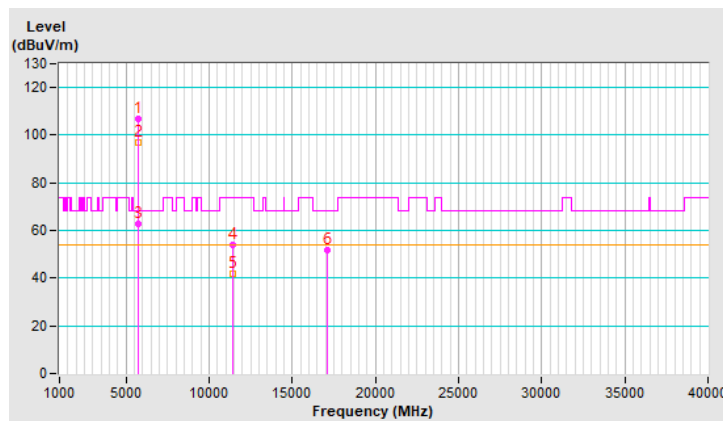


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 144 : 5720 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 5460.00         | 50.2 PK                 | 74.0           | -23.8       | 3.25 H             | 182                  | 48.4             | 1.8                      |
| 2  | 5460.00         | 40.1 AV                 | 54.0           | -13.9       | 3.25 H             | 182                  | 38.3             | 1.8                      |
| 3  | #5470.00        | 50.9 PK                 | 68.2           | -17.3       | 3.25 H             | 182                  | 49.1             | 1.8                      |
| 4  | *5720.00        | 119.2 PK                |                |             | 3.25 H             | 182                  | 117.1            | 2.1                      |
| 5  | *5720.00        | 109.1 AV                |                |             | 3.25 H             | 182                  | 107.0            | 2.1                      |
| 6  | #5850.00        | 50.6 PK                 | 68.2           | -17.6       | 3.25 H             | 182                  | 48.3             | 2.3                      |
| 7  | 11440.00        | 55.0 PK                 | 74.0           | -19.0       | 2.14 H             | 165                  | 42.3             | 12.7                     |
| 8  | 11440.00        | 42.0 AV                 | 54.0           | -12.0       | 2.14 H             | 165                  | 29.3             | 12.7                     |
| 9  | #17160.00       | 53.1 PK                 | 68.2           | -15.1       | 2.45 H             | 144                  | 36.8             | 16.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

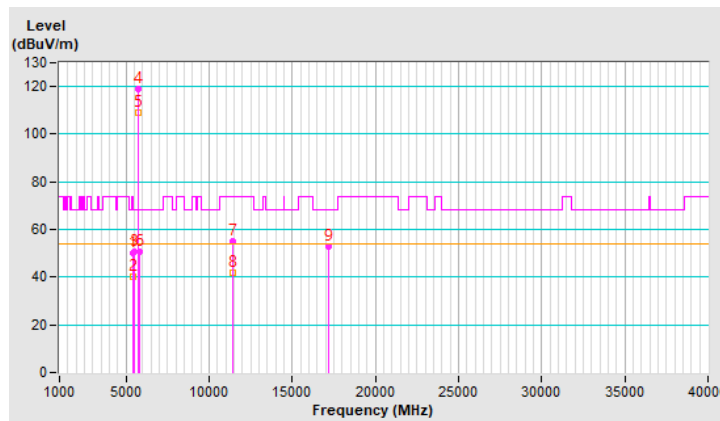


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 144 : 5720 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 5460.00         | 49.3 PK                 | 74.0           | -24.7       | 3.41 V             | 153                  | 47.5             | 1.8                      |
| 2  | 5460.00         | 39.3 AV                 | 54.0           | -14.7       | 3.41 V             | 153                  | 37.5             | 1.8                      |
| 3  | #5470.00        | 51.5 PK                 | 68.2           | -16.7       | 3.41 V             | 153                  | 49.7             | 1.8                      |
| 4  | *5720.00        | 108.8 PK                |                |             | 3.41 V             | 153                  | 106.7            | 2.1                      |
| 5  | *5720.00        | 98.4 AV                 |                |             | 3.41 V             | 153                  | 96.3             | 2.1                      |
| 6  | #5850.00        | 52.2 PK                 | 68.2           | -16.0       | 3.41 V             | 153                  | 49.9             | 2.3                      |
| 7  | 11440.00        | 50.0 PK                 | 74.0           | -24.0       | 3.39 V             | 77                   | 37.3             | 12.7                     |
| 8  | 11440.00        | 37.5 AV                 | 54.0           | -16.5       | 3.39 V             | 77                   | 24.8             | 12.7                     |
| 9  | #17160.00       | 49.5 PK                 | 68.2           | -18.7       | 3.48 V             | 72                   | 33.2             | 16.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

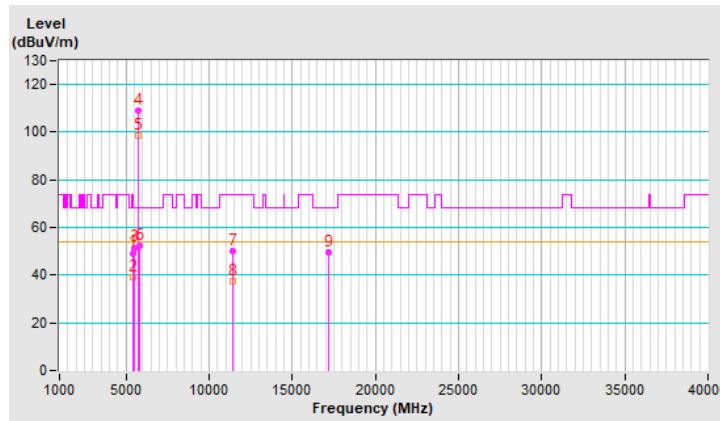


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 149 : 5745 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | #5631.52        | 49.8 PK                 | 68.2           | -18.4       | 3.09 H             | 157                  | 47.9             | 1.9                      |
| 2  | *5745.00        | 114.1 PK                |                |             | 3.09 H             | 157                  | 112.0            | 2.1                      |
| 3  | *5745.00        | 103.8 AV                |                |             | 3.09 H             | 157                  | 101.7            | 2.1                      |
| 4  | #5970.87        | 50.5 PK                 | 68.2           | -17.7       | 3.09 H             | 157                  | 47.9             | 2.6                      |
| 5  | 11490.00        | 55.3 PK                 | 74.0           | -18.7       | 1.54 H             | 301                  | 42.5             | 12.8                     |
| 6  | 11490.00        | 44.3 AV                 | 54.0           | -9.7        | 1.54 H             | 301                  | 31.5             | 12.8                     |
| 7  | #17235.00       | 52.5 PK                 | 68.2           | -15.7       | 1.32 H             | 231                  | 36.0             | 16.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

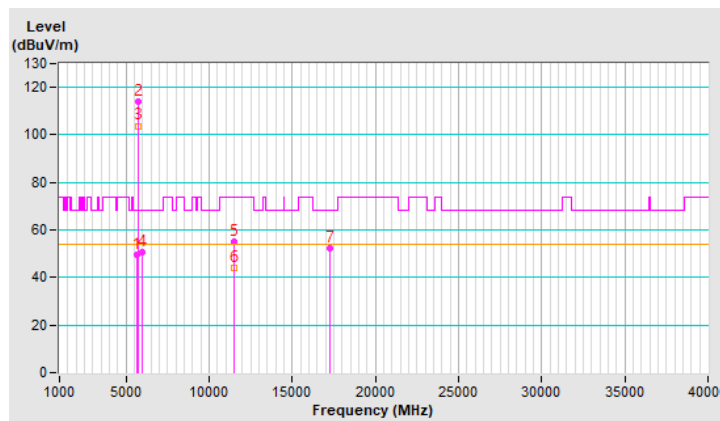




|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 149 : 5745 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | #5621.89        | 49.4 PK                 | 68.2           | -18.8       | 3.48 V             | 147                  | 47.5             | 1.9                      |
| 2  | *5745.00        | 106.9 PK                |                |             | 3.48 V             | 147                  | 104.8            | 2.1                      |
| 3  | *5745.00        | 97.2 AV                 |                |             | 3.48 V             | 147                  | 95.1             | 2.1                      |
| 4  | #5931.06        | 50.4 PK                 | 68.2           | -17.8       | 3.48 V             | 147                  | 47.9             | 2.5                      |
| 5  | 11490.00        | 50.9 PK                 | 74.0           | -23.1       | 3.55 V             | 59                   | 38.1             | 12.8                     |
| 6  | 11490.00        | 39.6 AV                 | 54.0           | -14.4       | 3.55 V             | 59                   | 26.8             | 12.8                     |
| 7  | #17235.00       | 50.3 PK                 | 68.2           | -17.9       | 3.07 V             | 45                   | 33.8             | 16.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

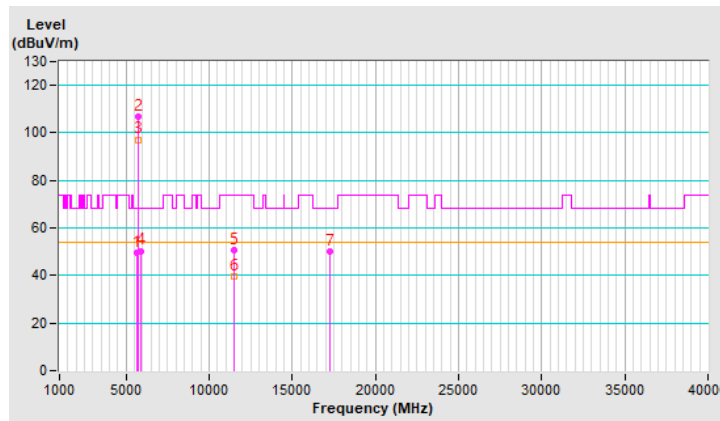


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 157 : 5785 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | #5605.24        | 52.4 PK                 | 68.2           | -15.8       | 3.11 H             | 150                  | 50.5             | 1.9                      |
| 2  | *5785.00        | 116.9 PK                |                |             | 3.11 H             | 150                  | 114.7            | 2.2                      |
| 3  | *5785.00        | 106.9 AV                |                |             | 3.11 H             | 150                  | 104.7            | 2.2                      |
| 4  | #5990.18        | 51.7 PK                 | 68.2           | -16.5       | 3.11 H             | 150                  | 49.1             | 2.6                      |
| 5  | 11570.00        | 55.1 PK                 | 74.0           | -18.9       | 2.51 H             | 144                  | 42.4             | 12.7                     |
| 6  | 11570.00        | 43.9 AV                 | 54.0           | -10.1       | 2.51 H             | 144                  | 31.2             | 12.7                     |
| 7  | #17355.00       | 53.7 PK                 | 68.2           | -14.5       | 3.05 H             | 169                  | 36.3             | 17.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

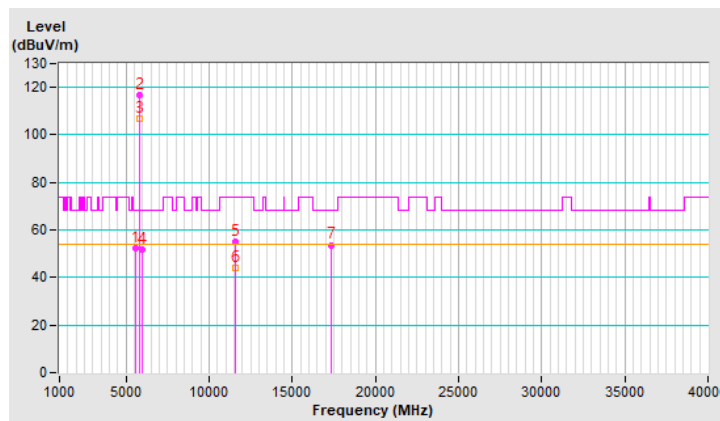


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 157 : 5785 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | #5587.92        | 51.8 PK                 | 68.2           | -16.4       | 3.30 V             | 102                  | 50.0             | 1.8                      |
| 2  | *5785.00        | 109.6 PK                |                |             | 3.30 V             | 102                  | 107.4            | 2.2                      |
| 3  | *5785.00        | 99.3 AV                 |                |             | 3.30 V             | 102                  | 97.1             | 2.2                      |
| 4  | #5982.90        | 50.5 PK                 | 68.2           | -17.7       | 3.30 V             | 102                  | 47.9             | 2.6                      |
| 5  | 11570.00        | 49.5 PK                 | 74.0           | -24.5       | 3.45 V             | 115                  | 36.8             | 12.7                     |
| 6  | 11570.00        | 37.7 AV                 | 54.0           | -16.3       | 3.45 V             | 115                  | 25.0             | 12.7                     |
| 7  | #17355.00       | 51.7 PK                 | 68.2           | -16.5       | 3.42 V             | 124                  | 34.3             | 17.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

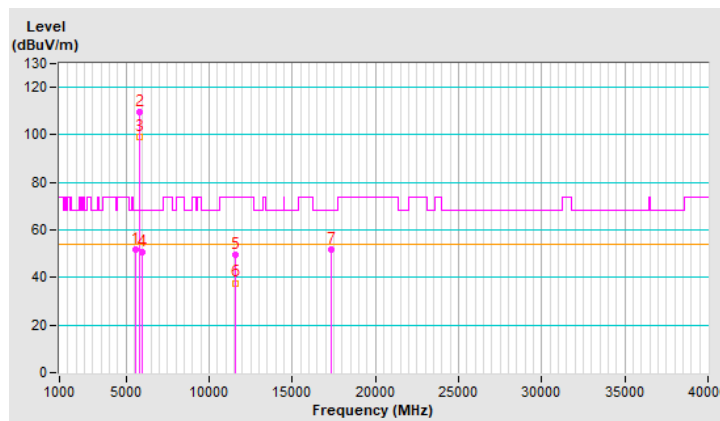


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 165 : 5825 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | #5597.82        | 50.2 PK                 | 68.2           | -18.0       | 3.14 H             | 120                  | 48.4             | 1.8                      |
| 2  | *5825.00        | 113.2 PK                |                |             | 3.14 H             | 120                  | 110.9            | 2.3                      |
| 3  | *5825.00        | 103.4 AV                |                |             | 3.14 H             | 120                  | 101.1            | 2.3                      |
| 4  | #5991.77        | 50.3 PK                 | 68.2           | -17.9       | 3.14 H             | 120                  | 47.7             | 2.6                      |
| 5  | 11650.00        | 55.1 PK                 | 74.0           | -18.9       | 1.80 H             | 278                  | 42.6             | 12.5                     |
| 6  | 11650.00        | 44.3 AV                 | 54.0           | -9.7        | 1.80 H             | 278                  | 31.8             | 12.5                     |
| 7  | #17475.00       | 54.9 PK                 | 68.2           | -13.3       | 3.18 H             | 230                  | 36.2             | 18.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

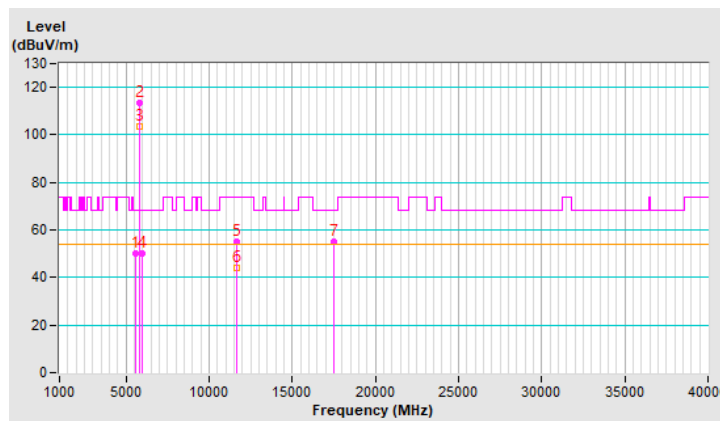


|                             |                                  |  |  |
|-----------------------------|----------------------------------|--|--|
| <b>RF Mode</b>              | 20 MHz Preamble 802.11ax (RU106) | <b>Channel</b>                           | CH 165 : 5825 MHz  |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                   | <b>Environmental Conditions</b>          | 29°C, 75% RH   |
| <b>Tested By</b>            | Louis Yang                       |  |  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | #5573.33        | 49.9 PK                 | 68.2           | -18.3       | 3.45 V             | 75                   | 48.1             | 1.8                      |
| 2  | *5825.00        | 110.9 PK                |                |             | 3.45 V             | 75                   | 108.6            | 2.3                      |
| 3  | *5825.00        | 100.2 AV                |                |             | 3.45 V             | 75                   | 97.9             | 2.3                      |
| 4  | #5971.52        | 46.9 PK                 | 68.2           | -21.3       | 3.45 V             | 75                   | 44.3             | 2.6                      |
| 5  | 11650.00        | 50.7 PK                 | 74.0           | -23.3       | 3.35 V             | 102                  | 38.2             | 12.5                     |
| 6  | 11650.00        | 40.1 AV                 | 54.0           | -13.9       | 3.35 V             | 102                  | 27.6             | 12.5                     |
| 7  | #17475.00       | 53.2 PK                 | 68.2           | -15.0       | 3.24 V             | 90                   | 34.5             | 18.7                     |





**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.




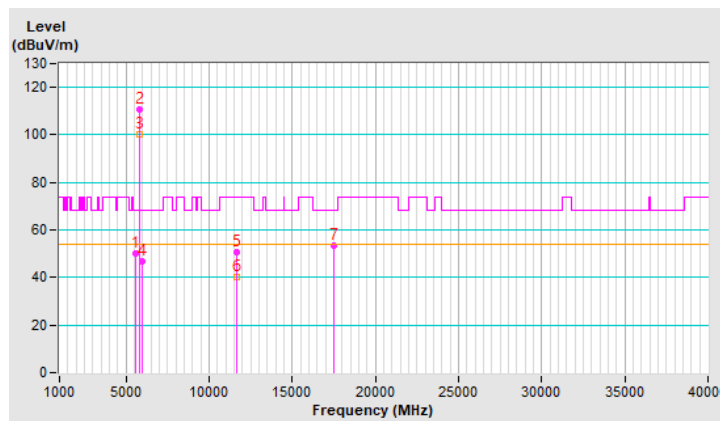


Plot of Band Edge Mode A





802.11a Channel 36

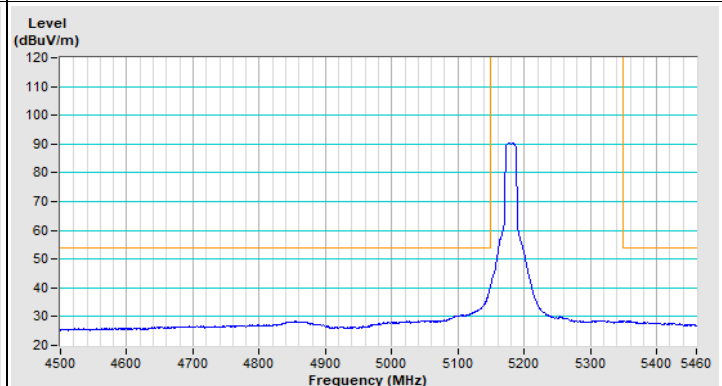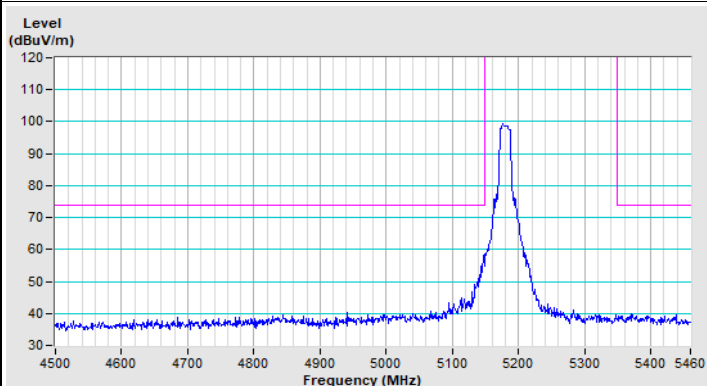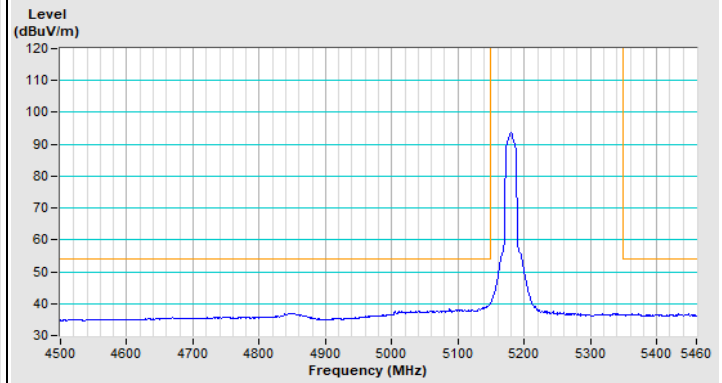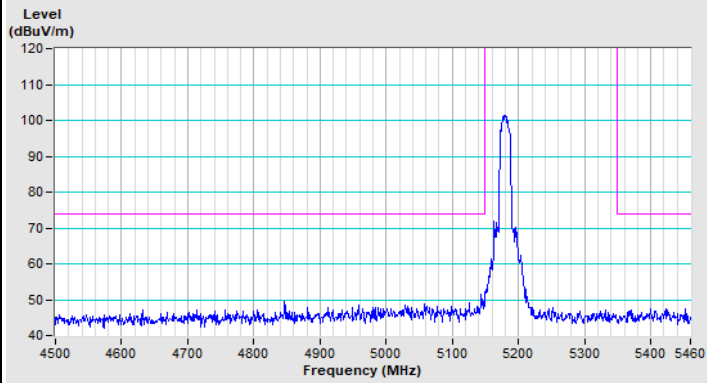



802.11a Channel 64

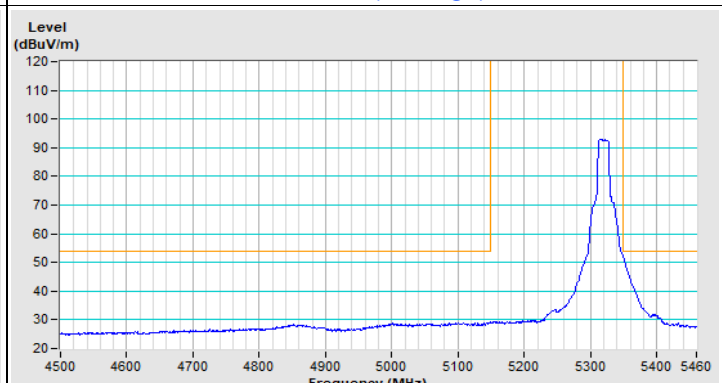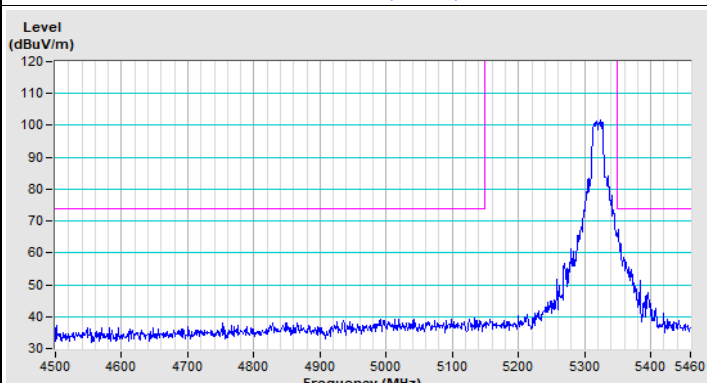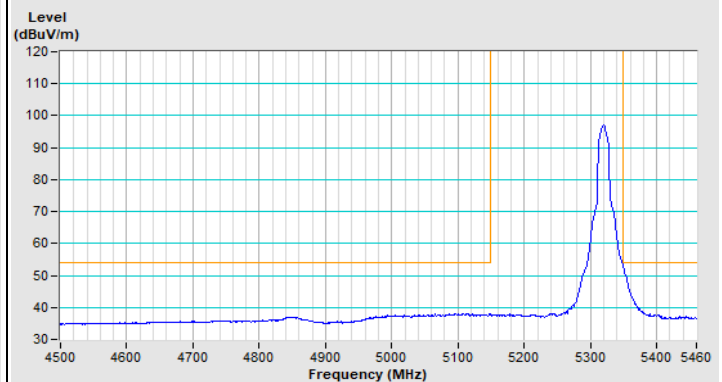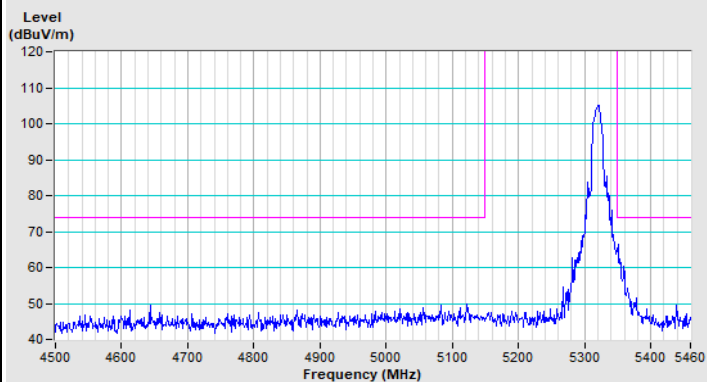


### 802.11a Channel 100

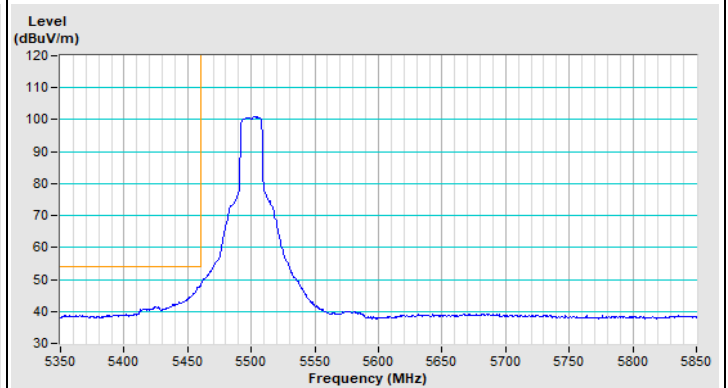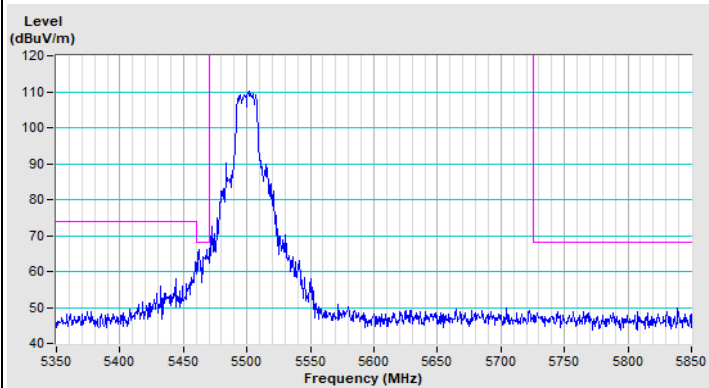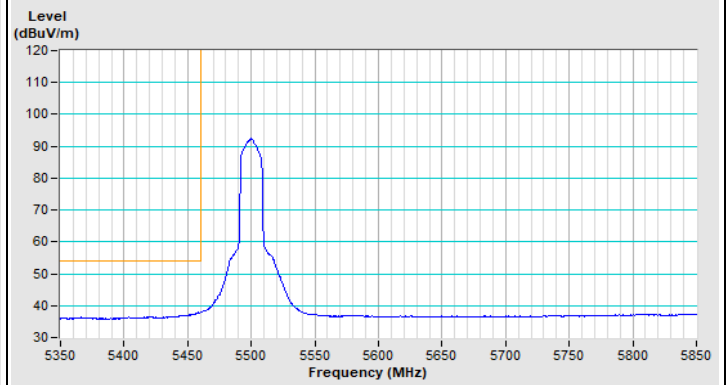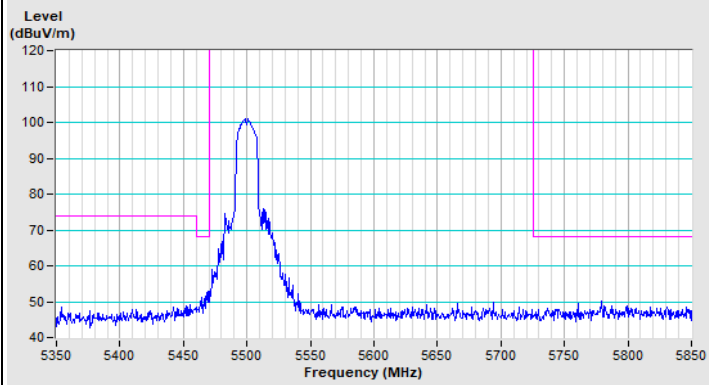


### 802.11a Channel 149

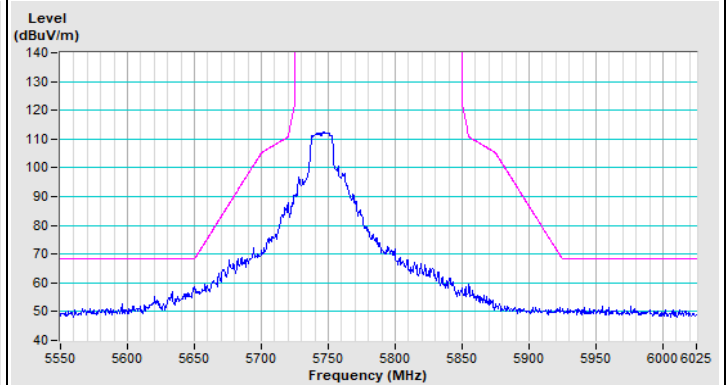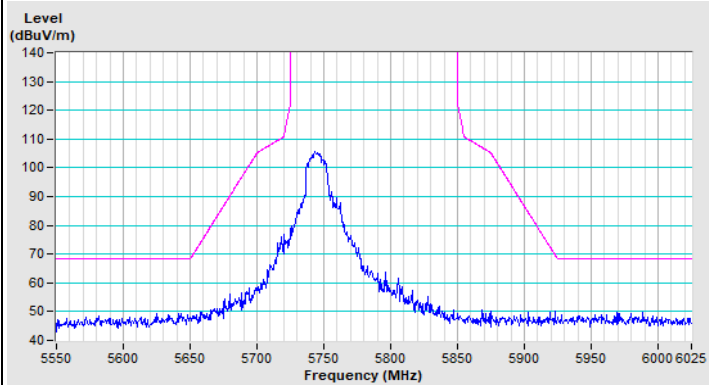

### 802.11a Channel 157

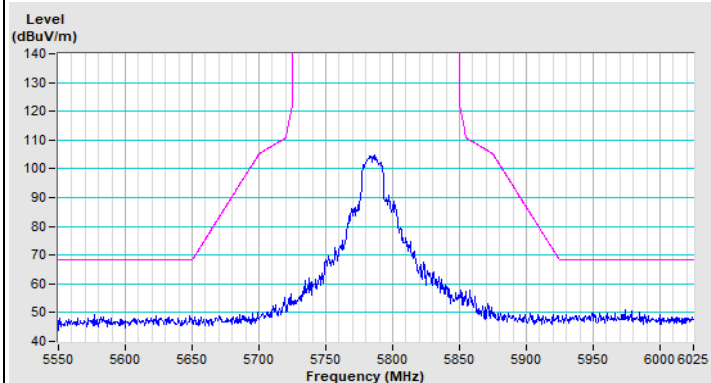


Horizontal (Peak)

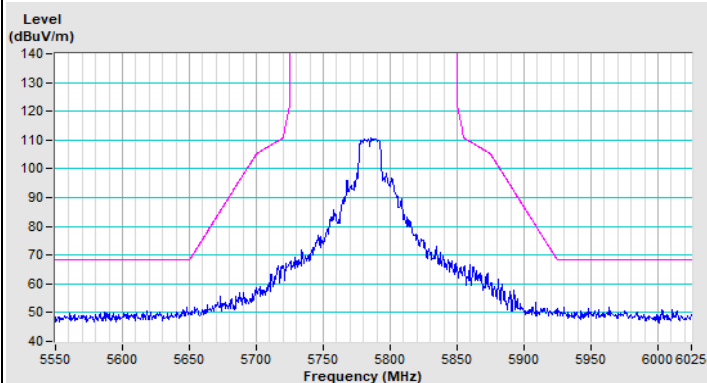


Vertical (Peak)

### 802.11a Channel 165

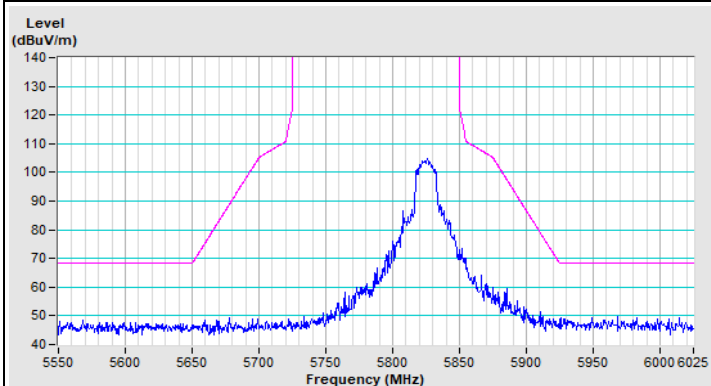


Horizontal (Peak)

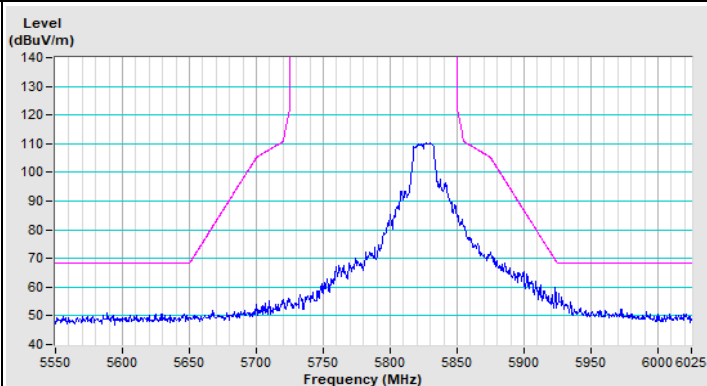


Vertical (Peak)




### 802.11ax (HE20) Channel 36

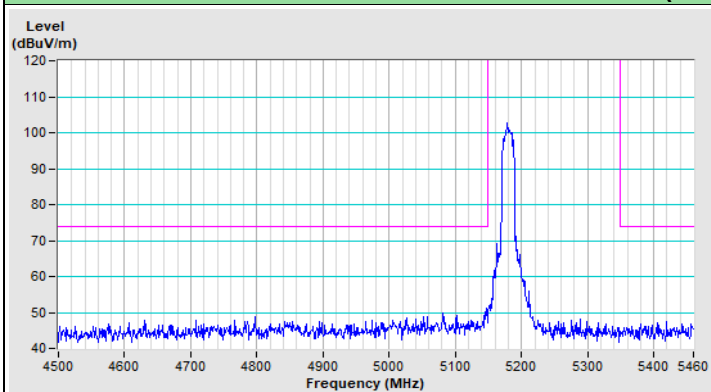


Horizontal (Peak)

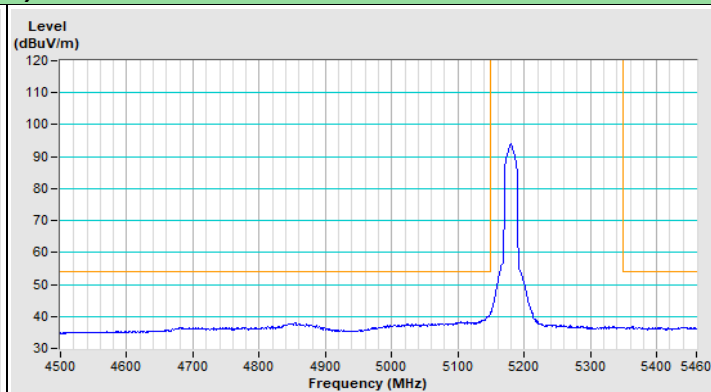

Horizontal (Average)

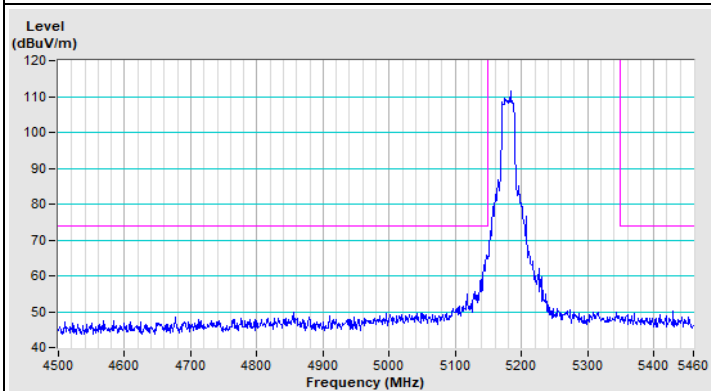


Vertical (Peak)

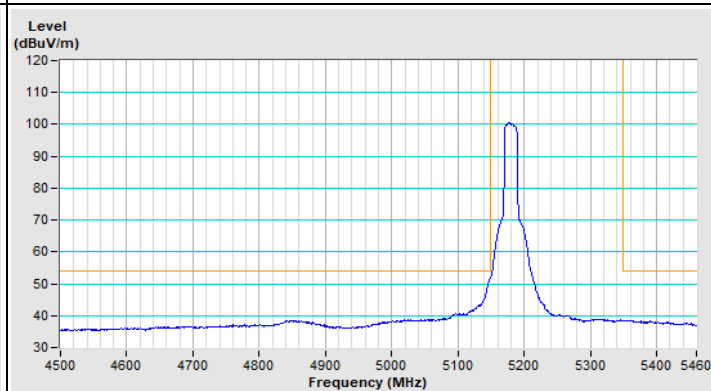


Vertical (Average)


### 802.11ax (HE20) Channel 64

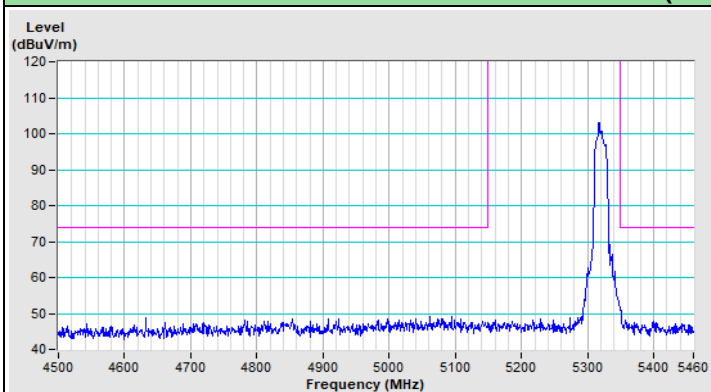


Horizontal (Peak)

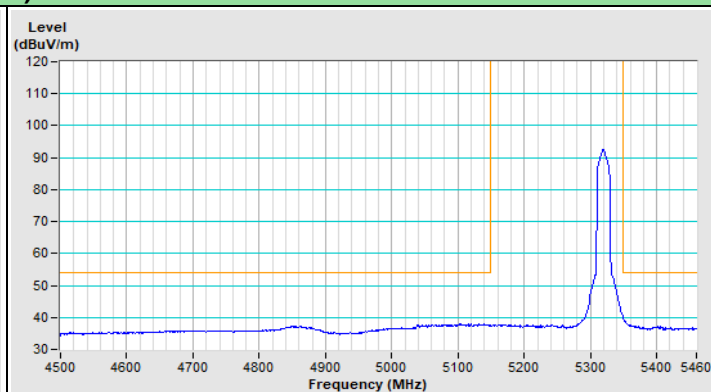

Horizontal (Average)

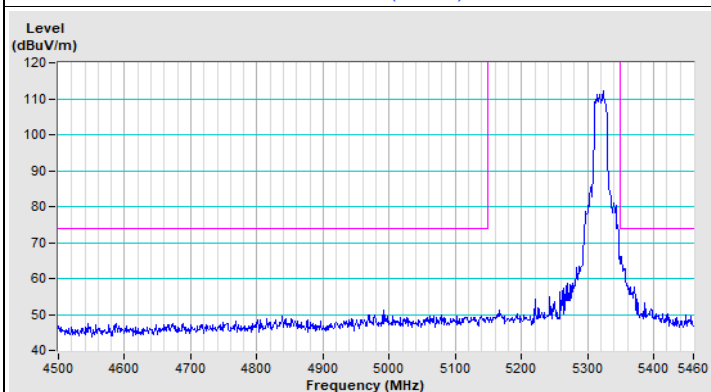


Vertical (Peak)

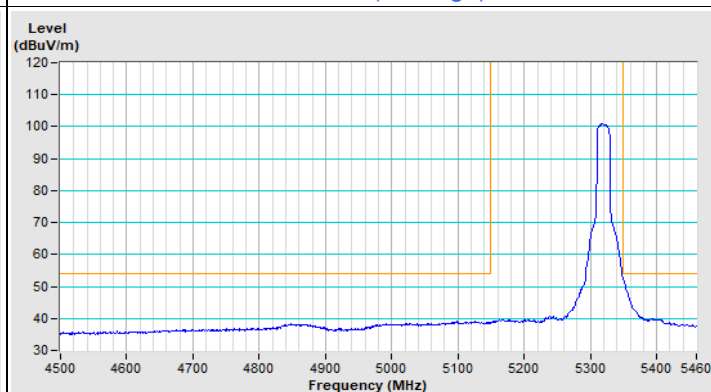


Vertical (Average)


### 802.11ax (HE20) Channel 100

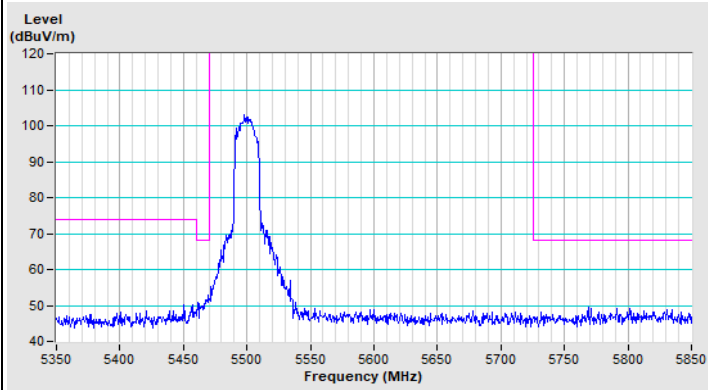


Horizontal (Peak)

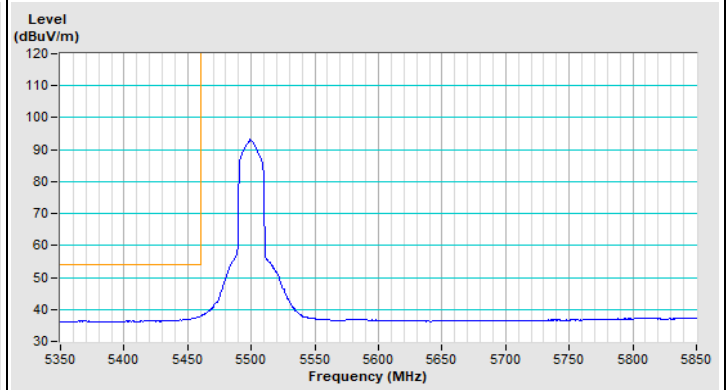

Horizontal (Average)

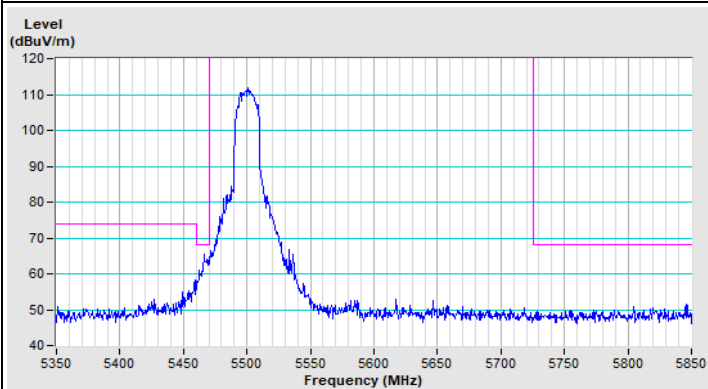


Vertical (Peak)

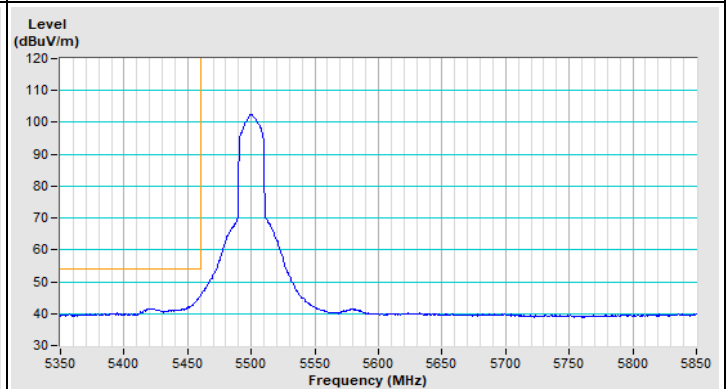


Vertical (Average)

### 802.11ax (HE20) Channel 149

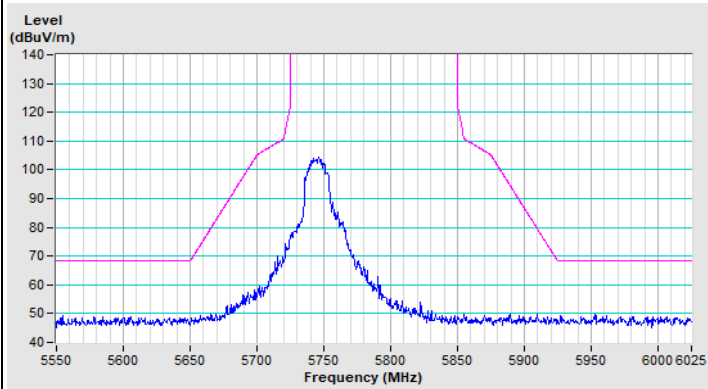


Horizontal (Peak)

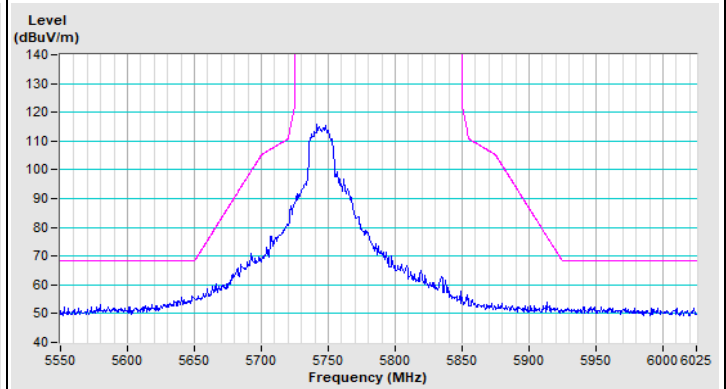


Vertical (Peak)

### 802.11ax (HE20) Channel 157

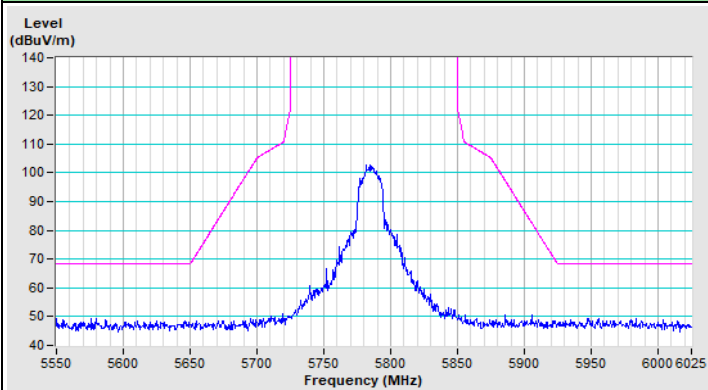


Horizontal (Peak)

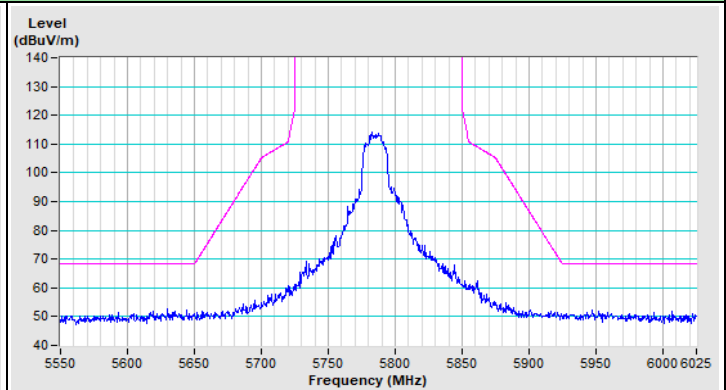


Vertical (Peak)

### 802.11ax (HE20) Channel 165

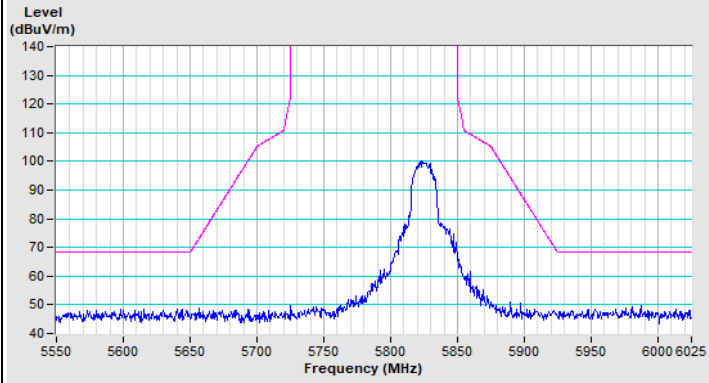


Horizontal (Peak)

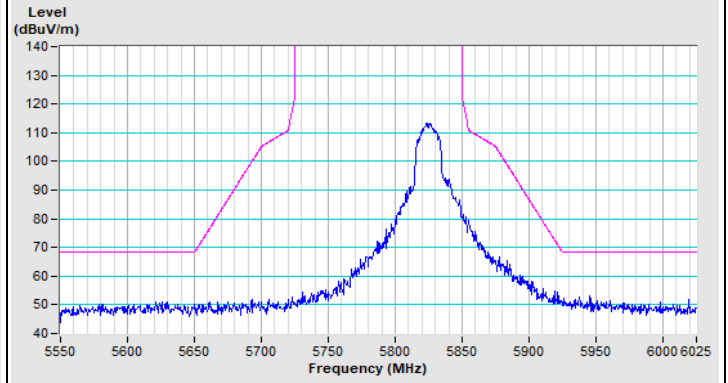


Vertical (Peak)


### 802.11ax (HE40) Channel 38

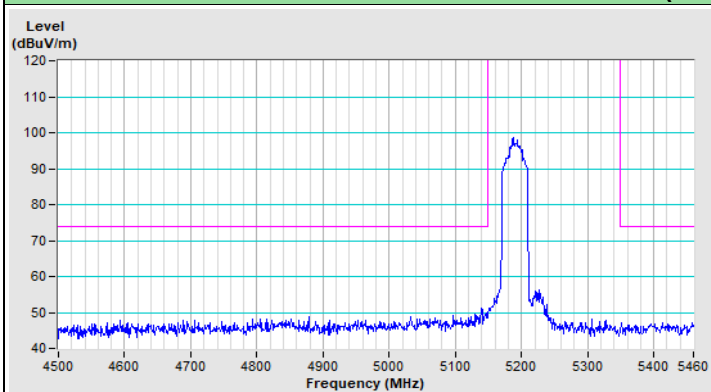


Horizontal (Peak)

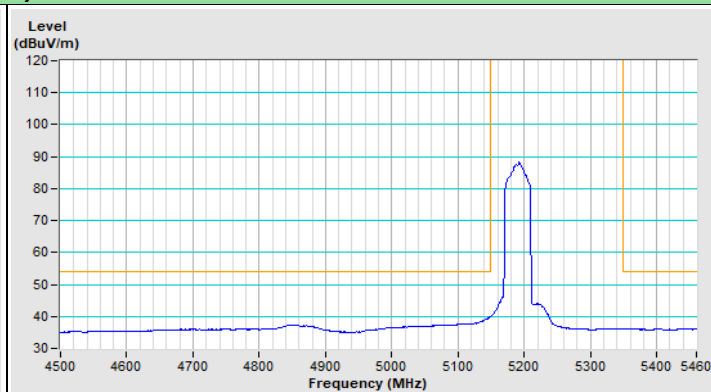

Horizontal (Average)

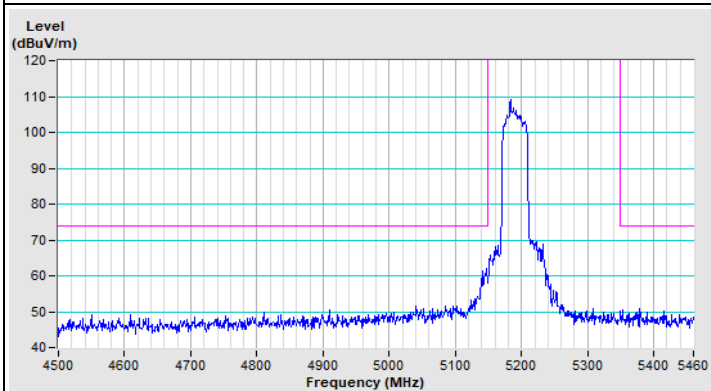


Vertical (Peak)

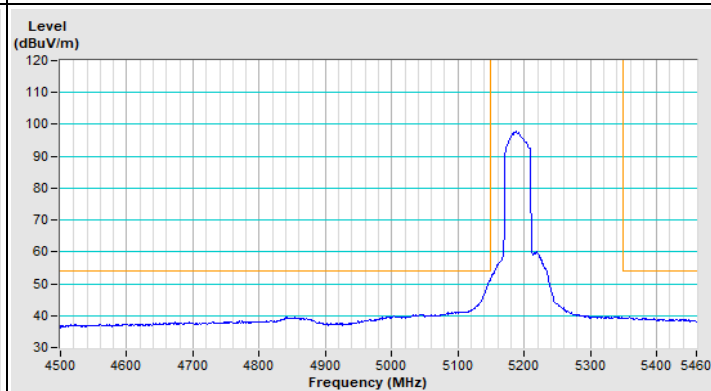


Vertical (Average)


### 802.11ax (HE40) Channel 62

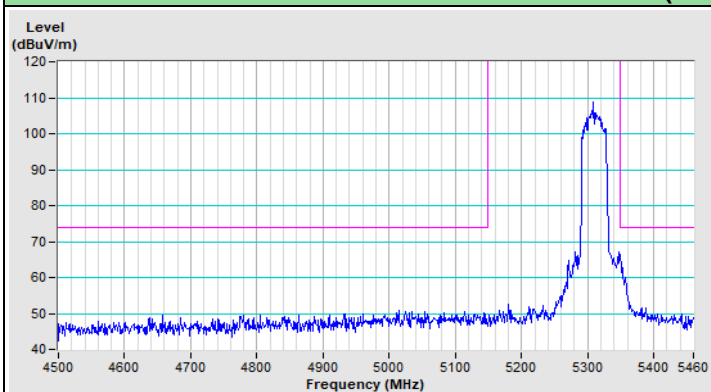


Horizontal (Peak)

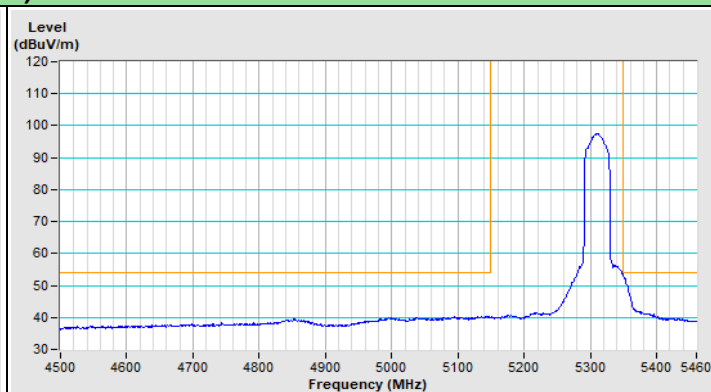

Horizontal (Average)

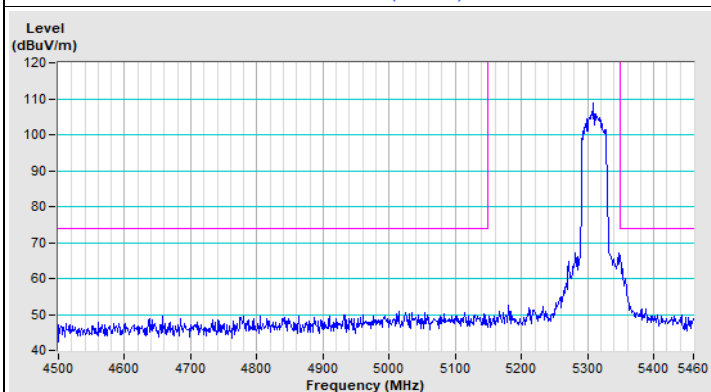


Vertical (Peak)

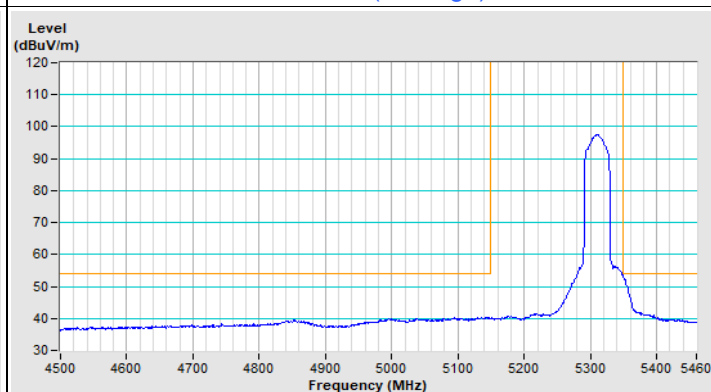


Vertical (Average)


### 802.11ax (HE40) Channel 102

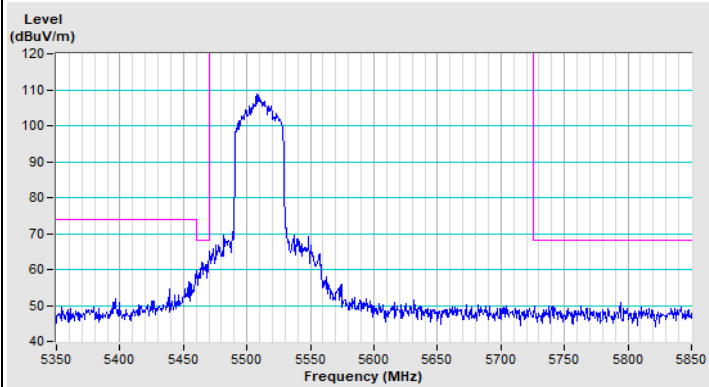


Horizontal (Peak)

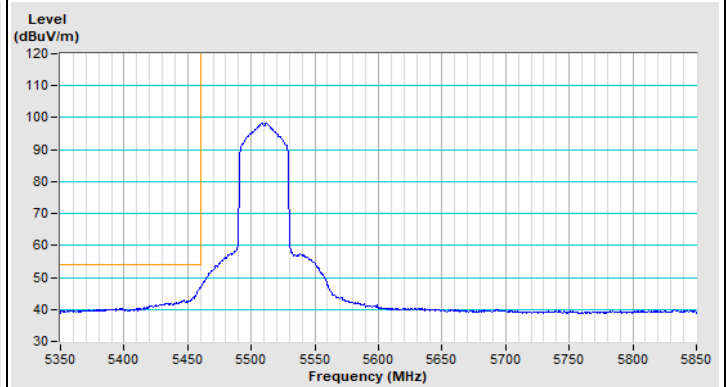

Horizontal (Average)

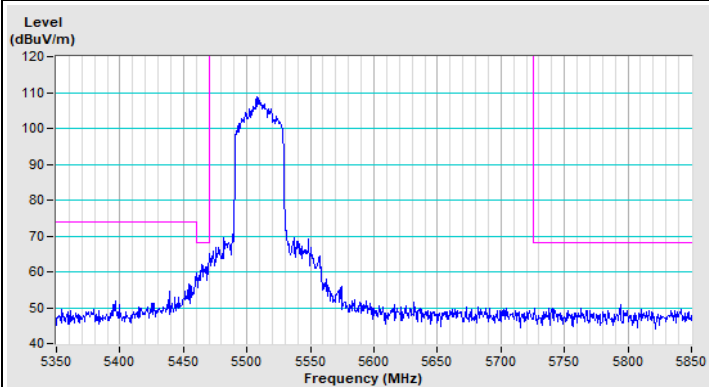


Vertical (Peak)

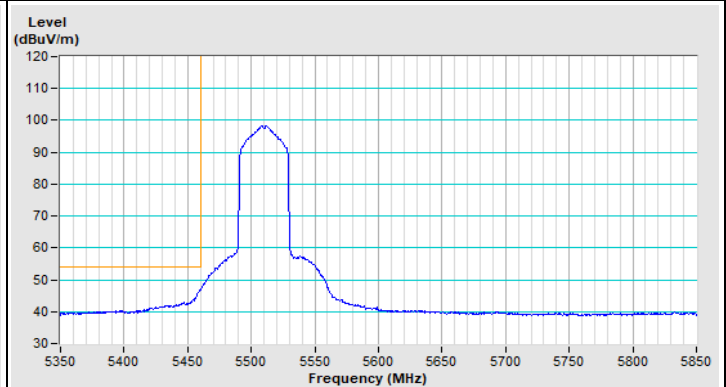


Vertical (Average)

### 802.11ax (HE40) Channel 151

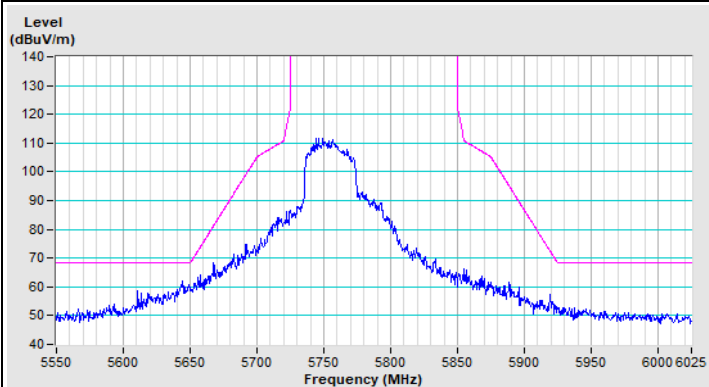


Horizontal (Peak)

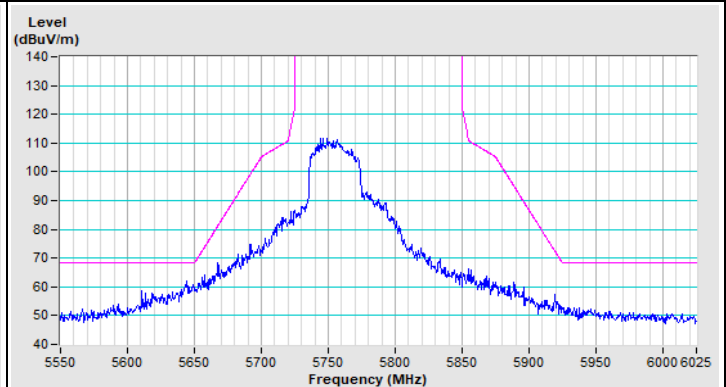


Vertical (Peak)

### 802.11ax (HE40) Channel 159

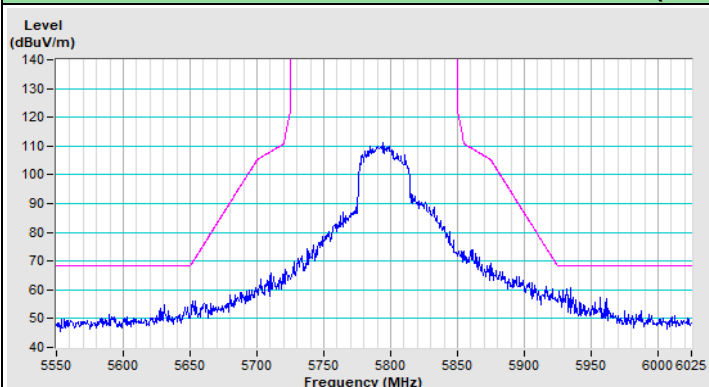


Horizontal (Peak)

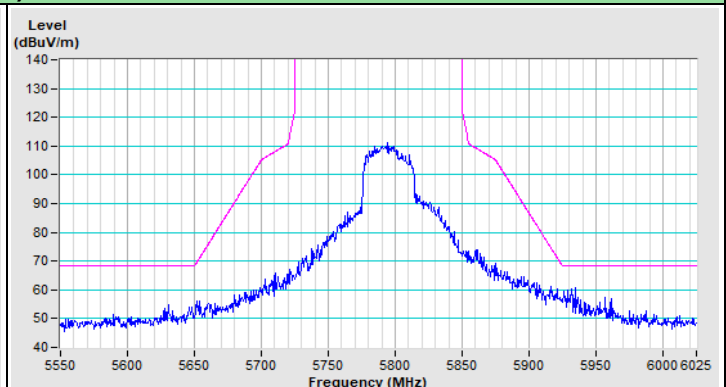


Vertical (Peak)


### 802.11ax (HE80) Channel 42

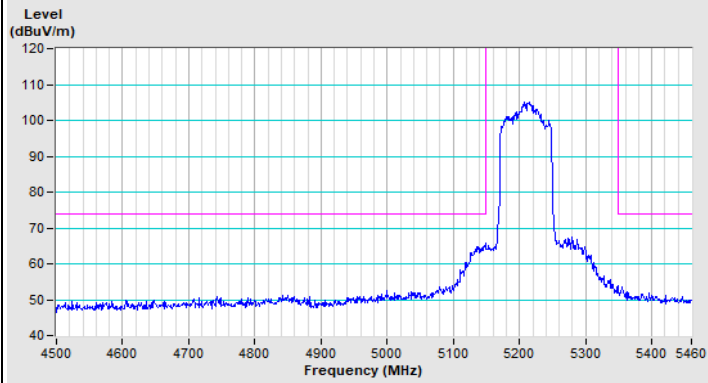


Horizontal (Peak)

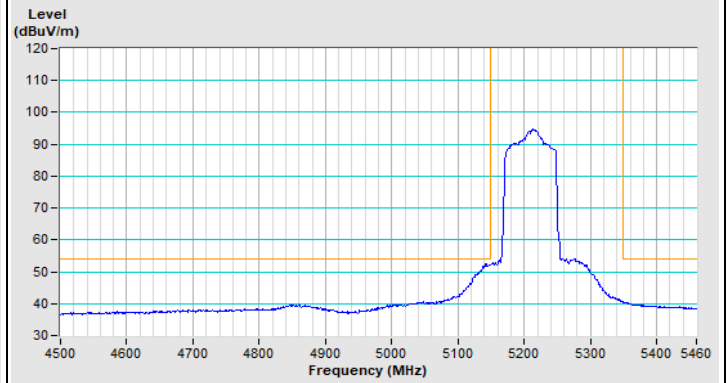

Horizontal (Average)

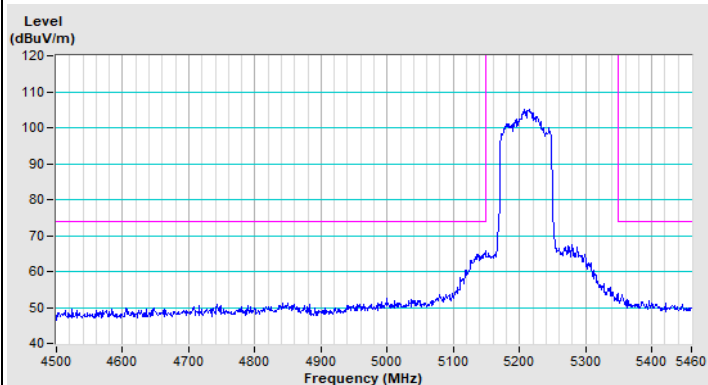


Vertical (Peak)

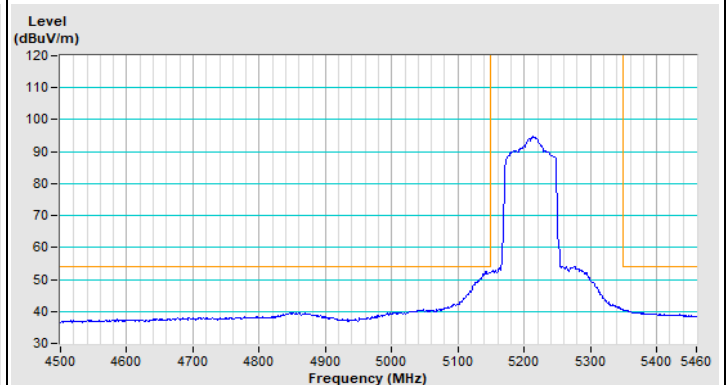


Vertical (Average)


### 802.11ax (HE80) Channel 58

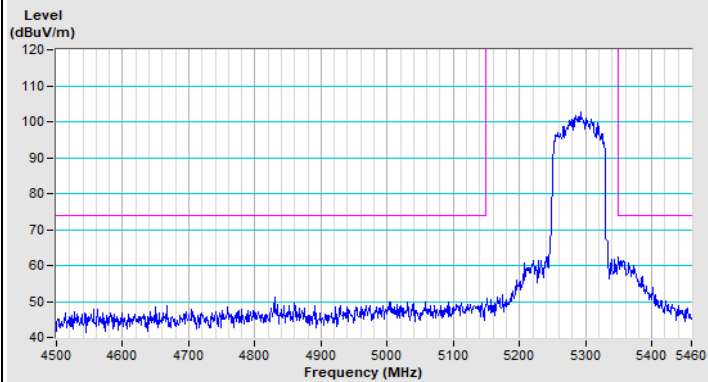


Horizontal (Peak)

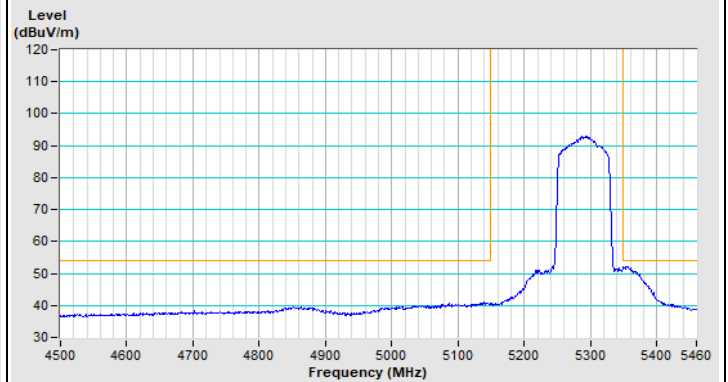

Horizontal (Average)

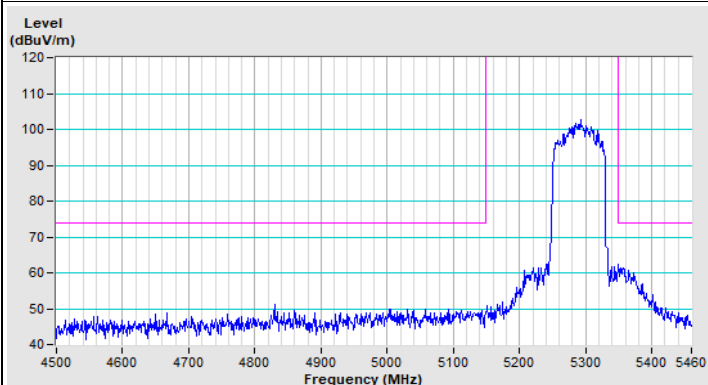


Vertical (Peak)

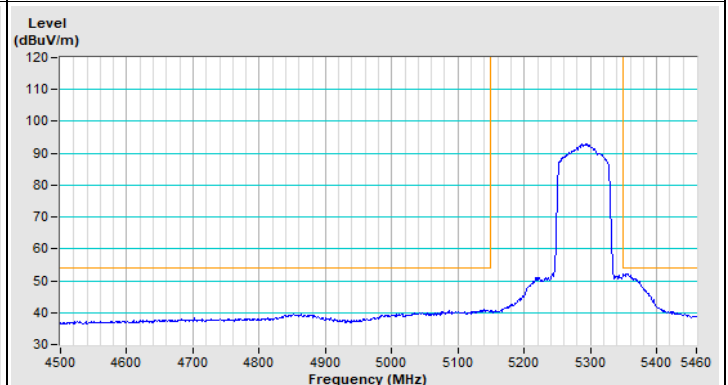


Vertical (Average)


### 802.11ax (HE80) Channel 106

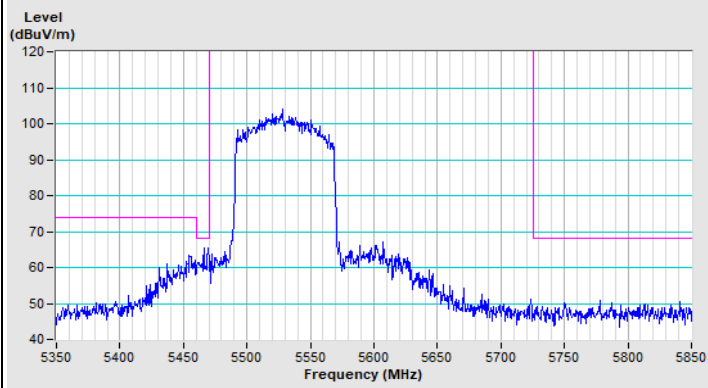


Horizontal (Peak)

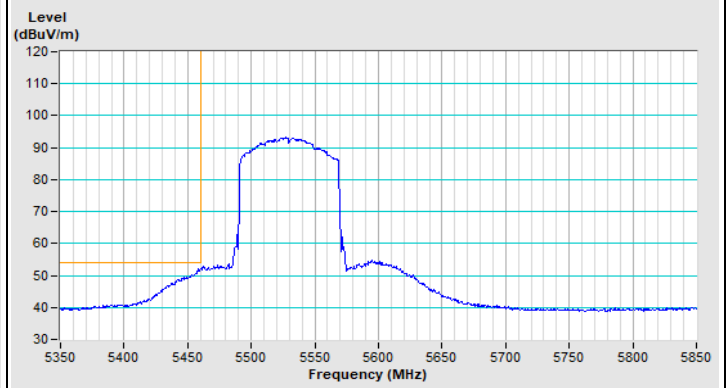

Horizontal (Average)

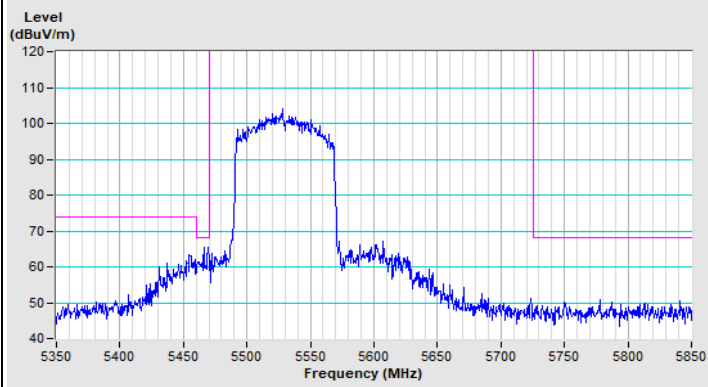


Vertical (Peak)

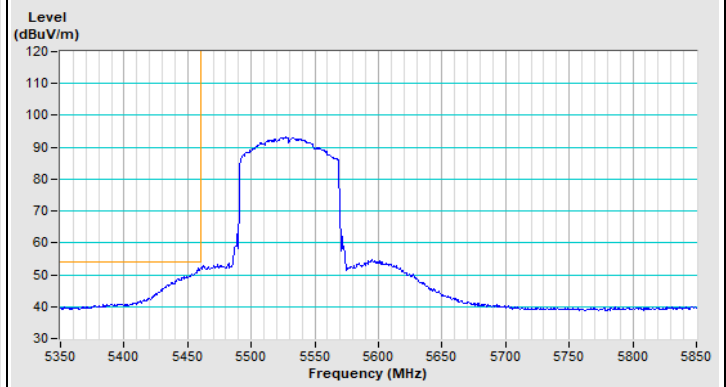


Vertical (Average)

221006P53-R1-326-01

### 802.11ax (HE80) Channel 155

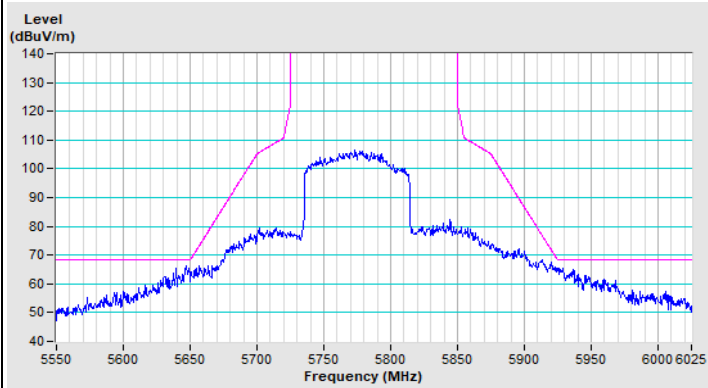


Horizontal (Peak)

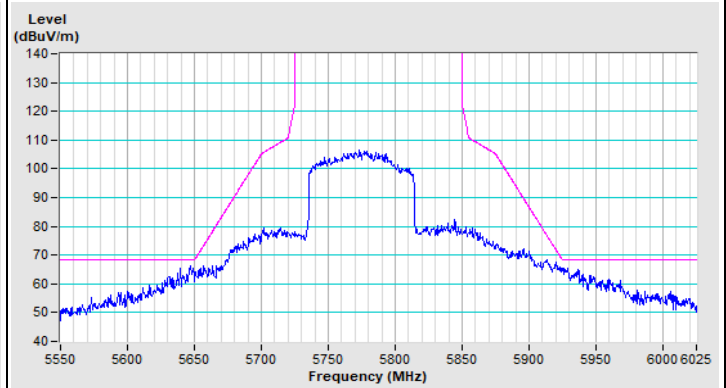


Vertical (Peak)


### 802.11ax (HE20) 26-tone RU Channel 36

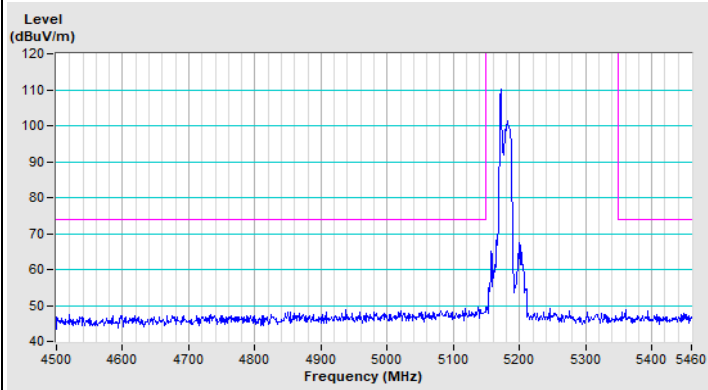


Horizontal (Peak)

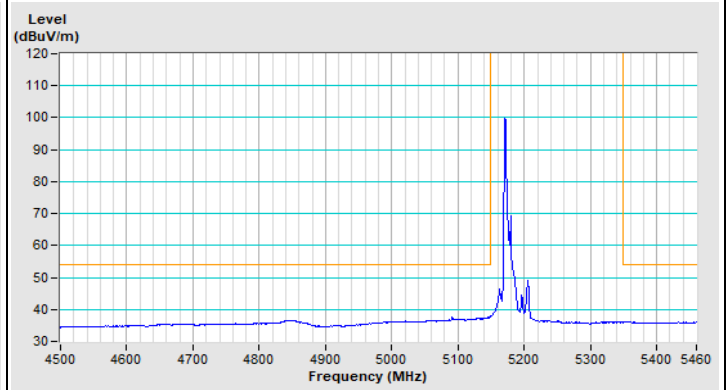

Horizontal (Average)

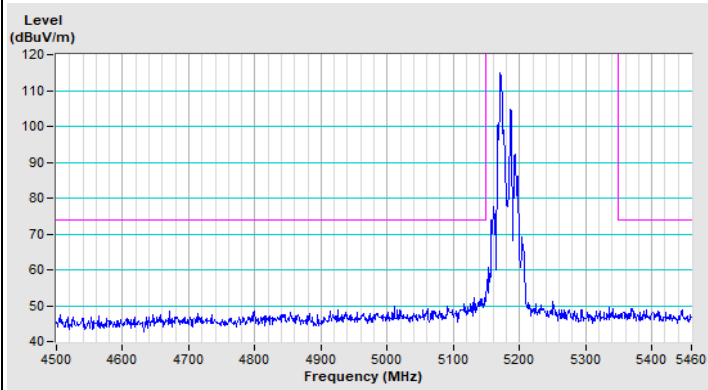


Vertical (Peak)

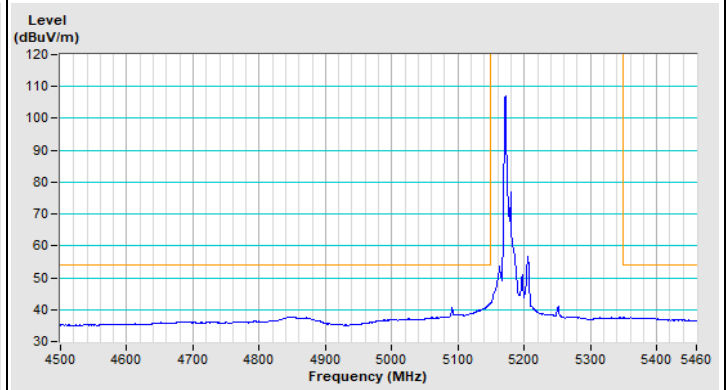


Vertical (Average)


### 802.11ax (HE20) 26-tone RU Channel 64

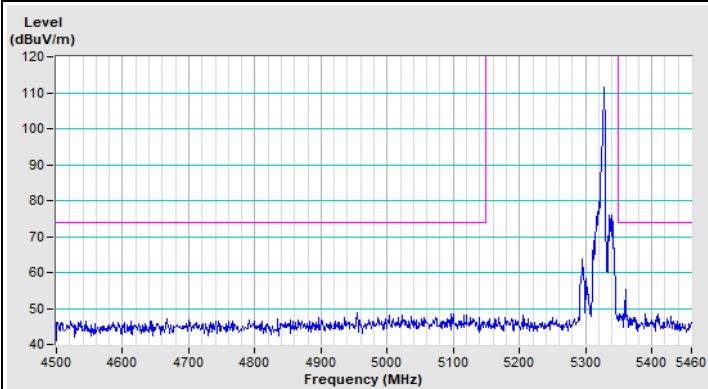


Horizontal (Peak)

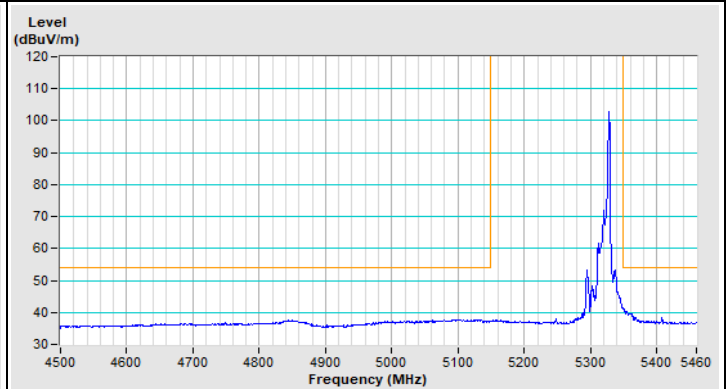

Horizontal (Average)

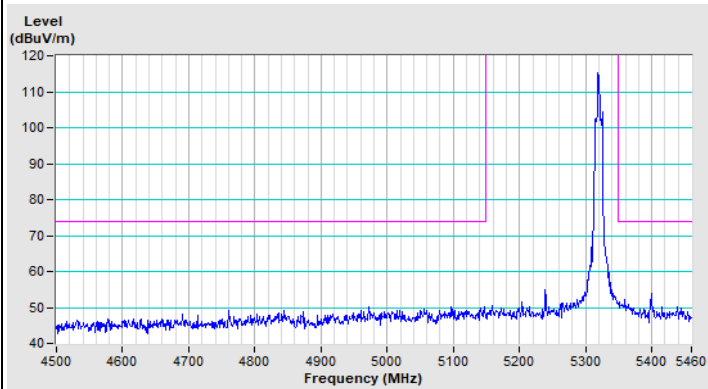


Vertical (Peak)

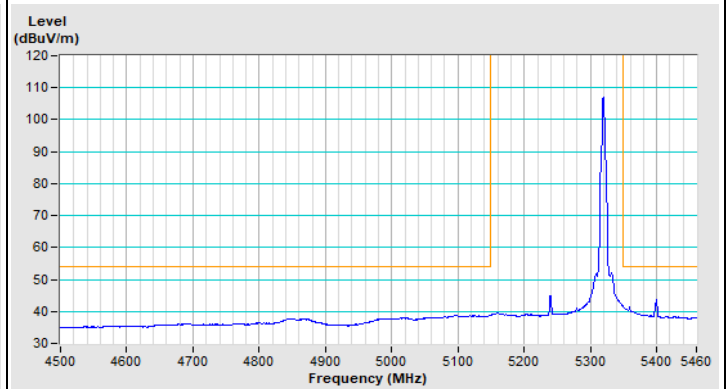


Vertical (Average)




### 802.11ax (HE20) 26-tone RU Channel 100

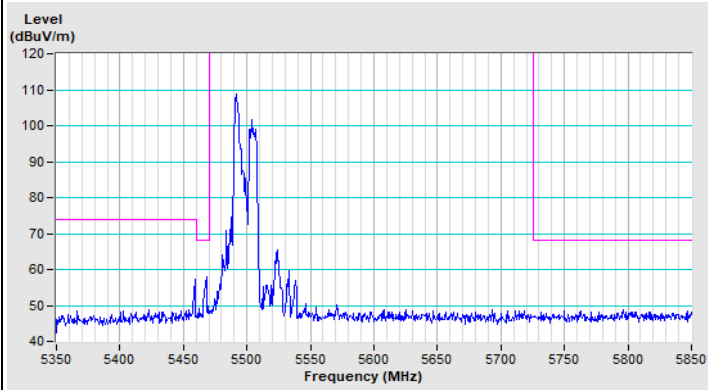


Horizontal (Peak)

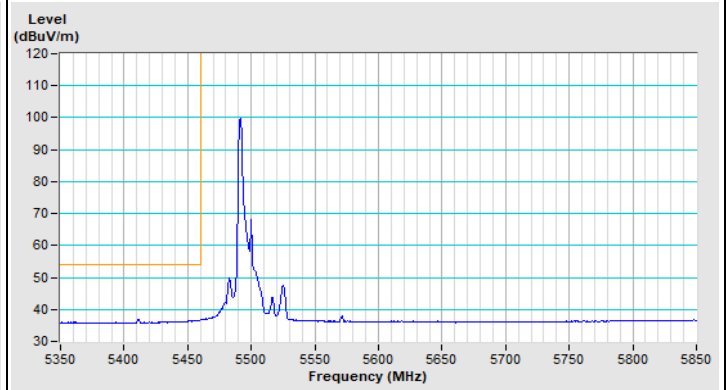

Horizontal (Average)

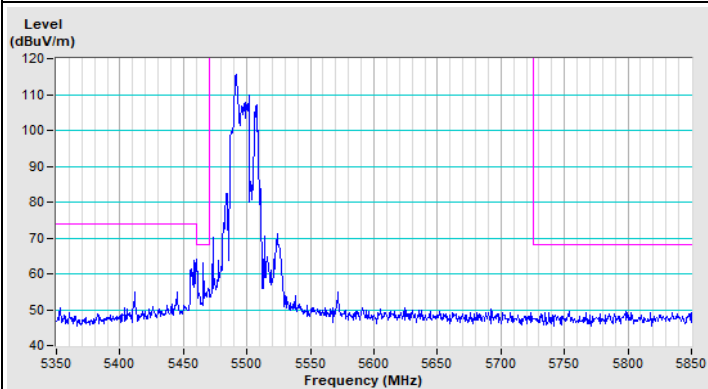


Vertical (Peak)

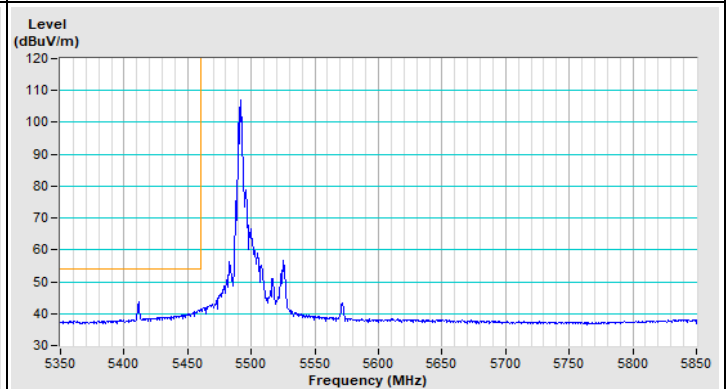


Vertical (Average)

### 802.11ax (HE20) 26-tone RU Channel 149

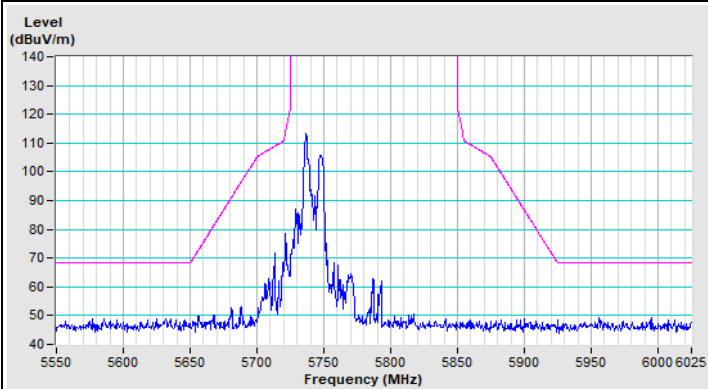


Horizontal (Peak)

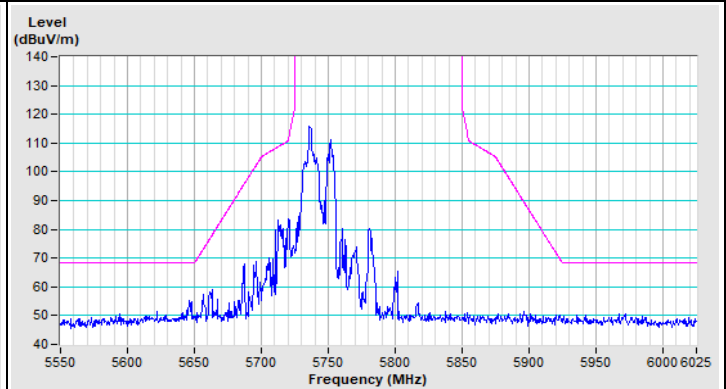


Vertical (Peak)

### 802.11ax (HE20) 26-tone RU Channel 157

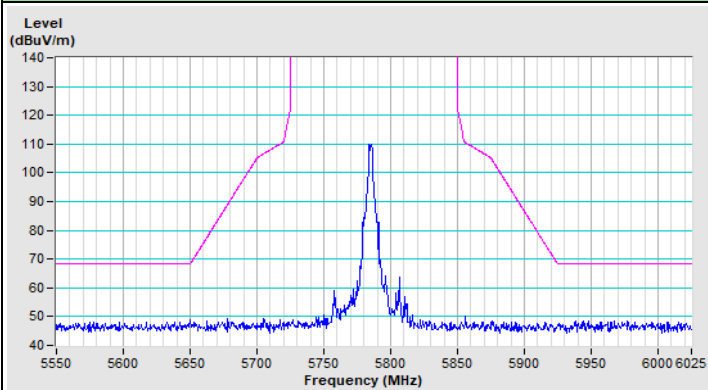


Horizontal (Peak)

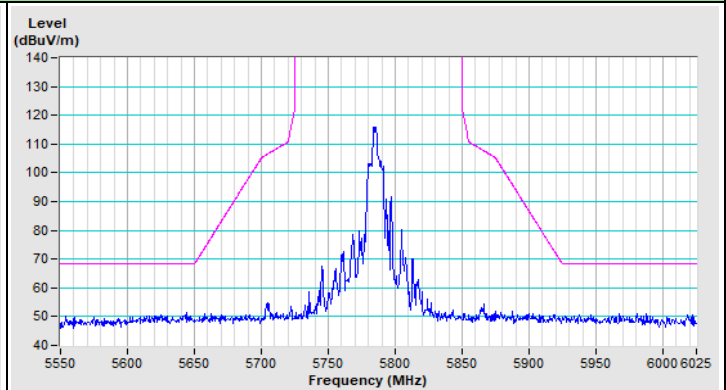


Vertical (Peak)

### 802.11ax (HE20) 26-tone RU Channel 165

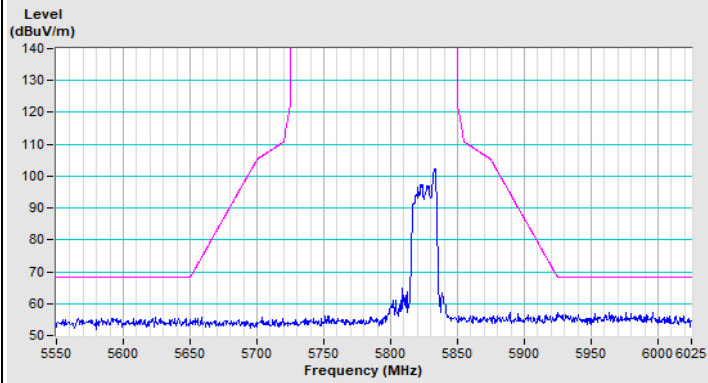


Horizontal (Peak)

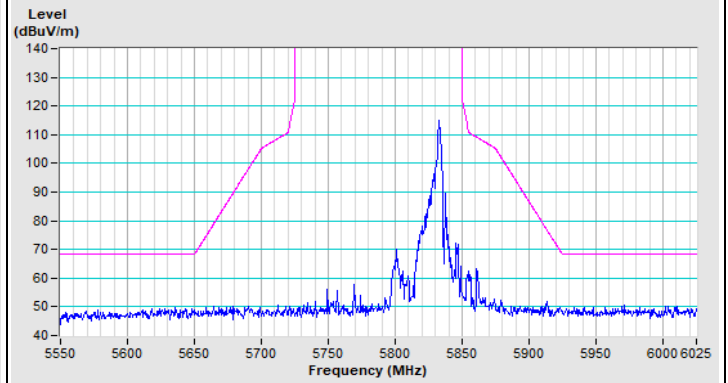


Vertical (Peak)


### 802.11ax (HE20) 52-tone RU Channel 36

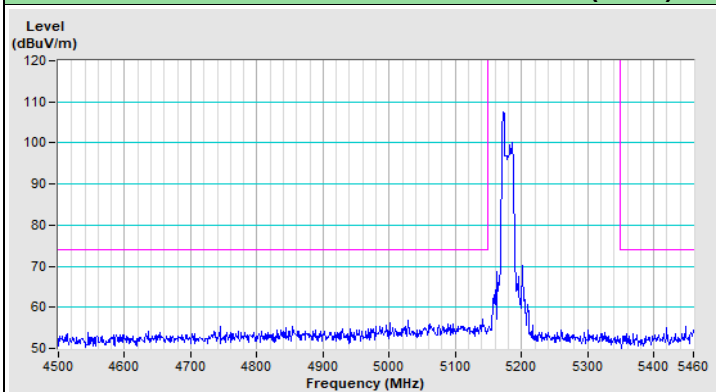


Horizontal (Peak)

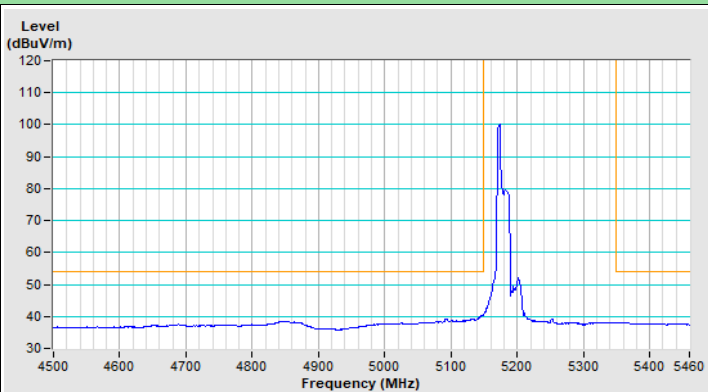

Horizontal (Average)

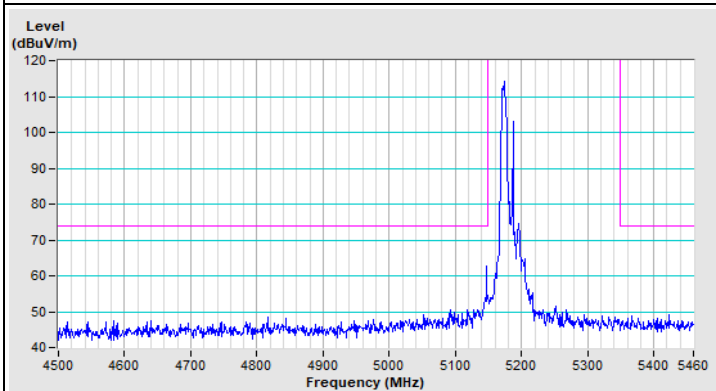


Vertical (Peak)

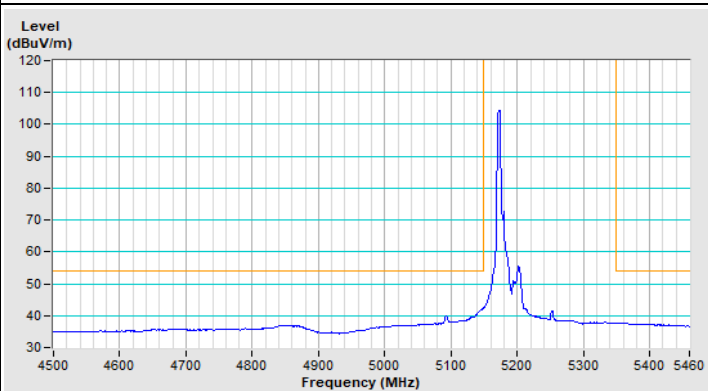


Vertical (Average)


### 802.11ax (HE20) 52-tone RU Channel 64

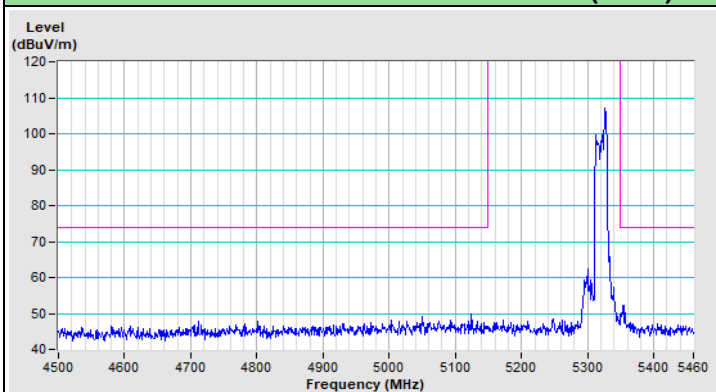


Horizontal (Peak)

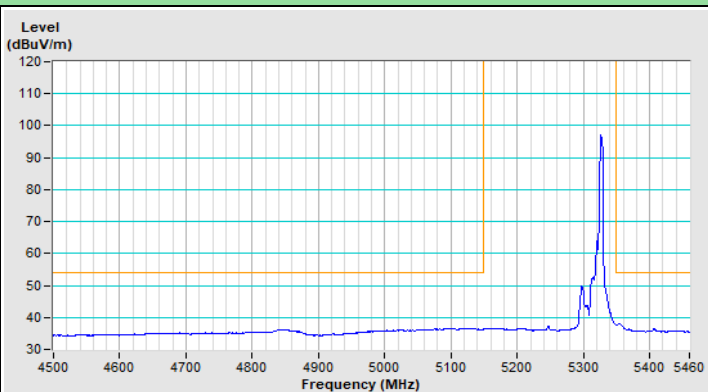

Horizontal (Average)

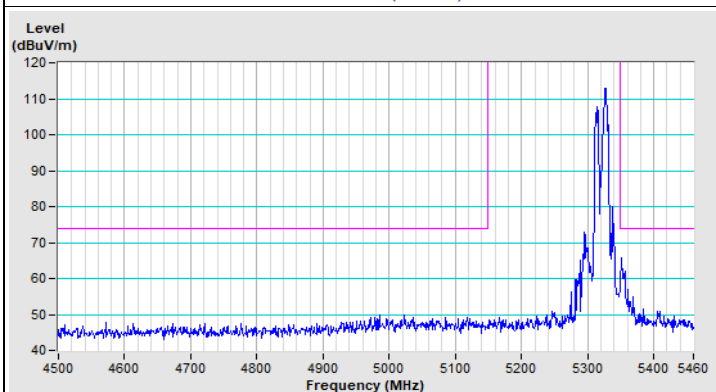


Vertical (Peak)

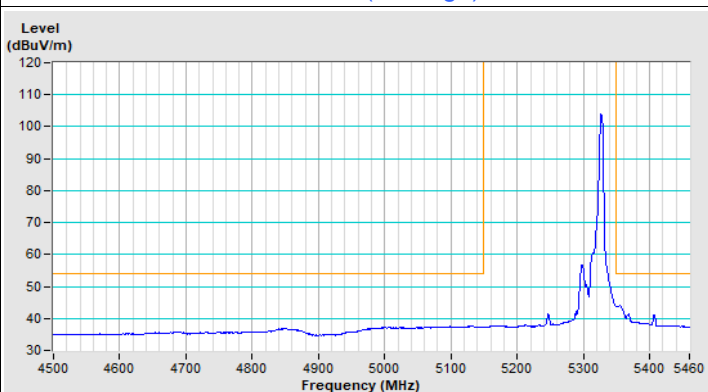


Vertical (Average)


### 802.11ax (HE20) 52-tone RU Channel 100

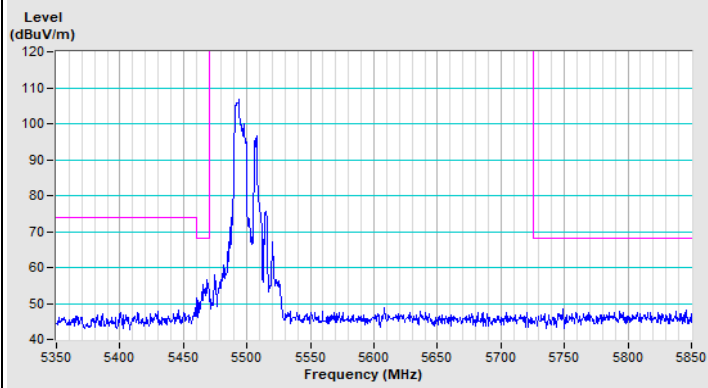


Horizontal (Peak)

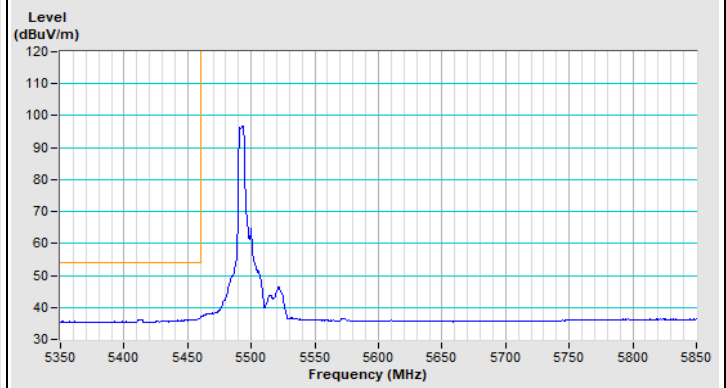

Horizontal (Average)

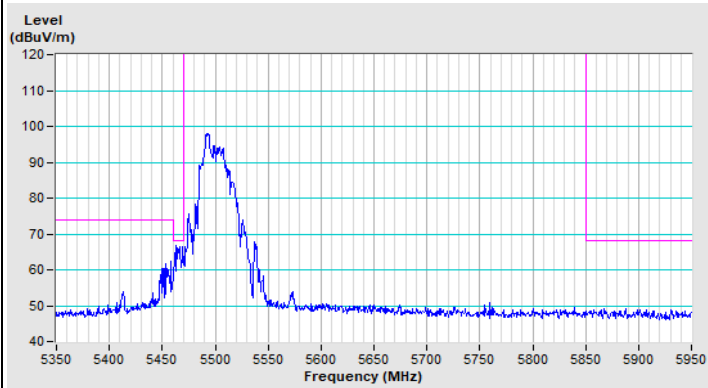


Vertical (Peak)

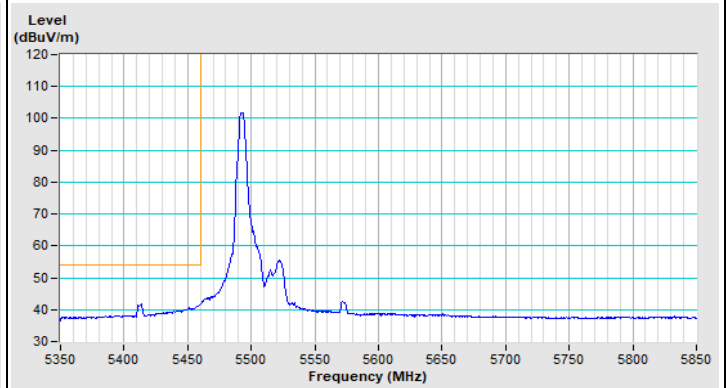


Vertical (Average)

### 802.11ax (HE20) 52-tone RU Channel 149

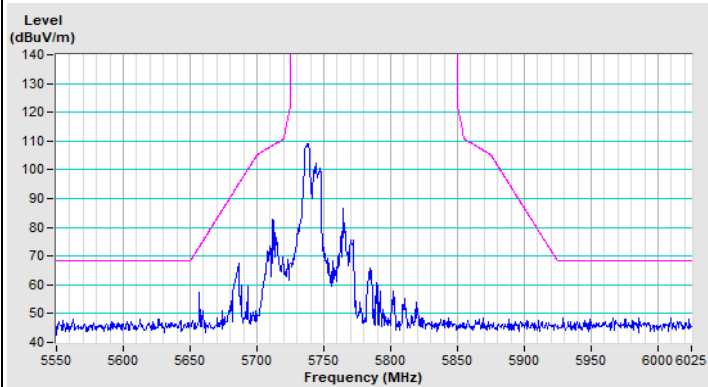


Horizontal (Peak)

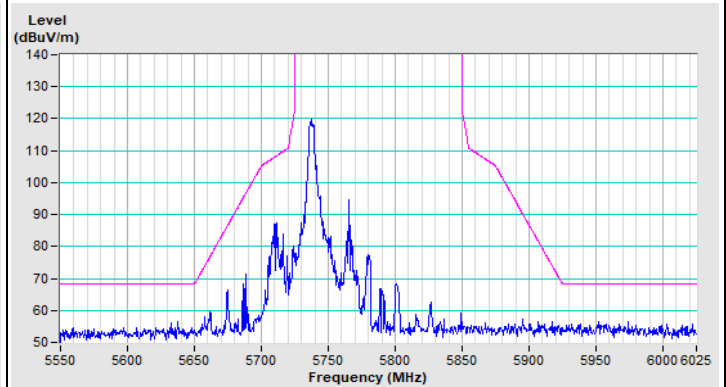


Vertical (Peak)

### 802.11ax (HE20) 52-tone RU Channel 157

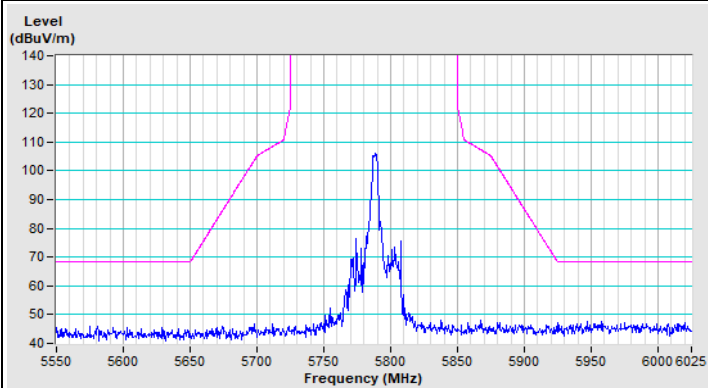


Horizontal (Peak)

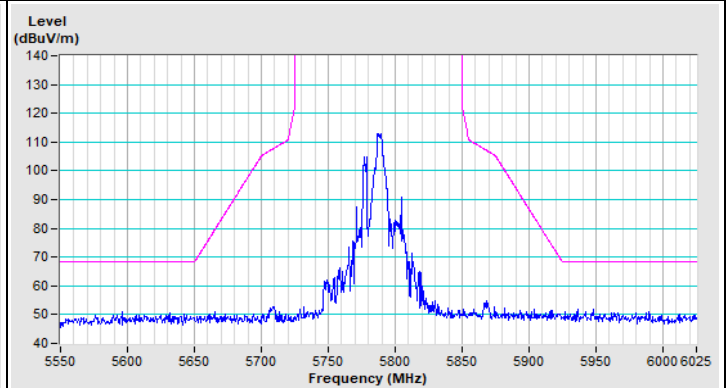


Vertical (Peak)



### 802.11ax (HE20) 52-tone RU Channel 165

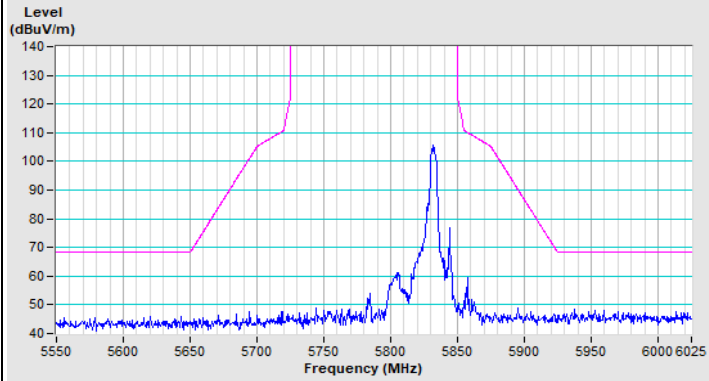


Horizontal (Peak)

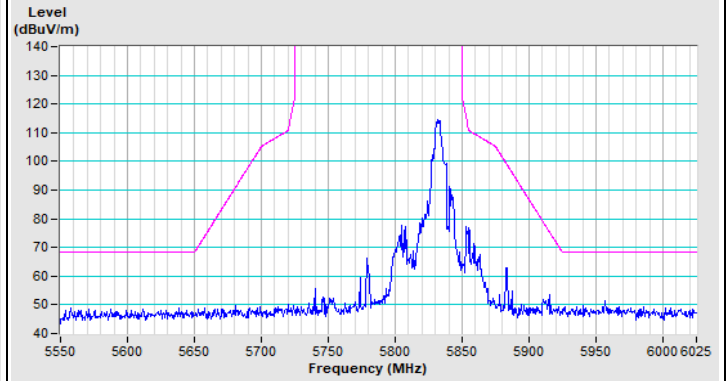


Vertical (Peak)




### 802.11ax (HE20) 106-tone RU Channel 36

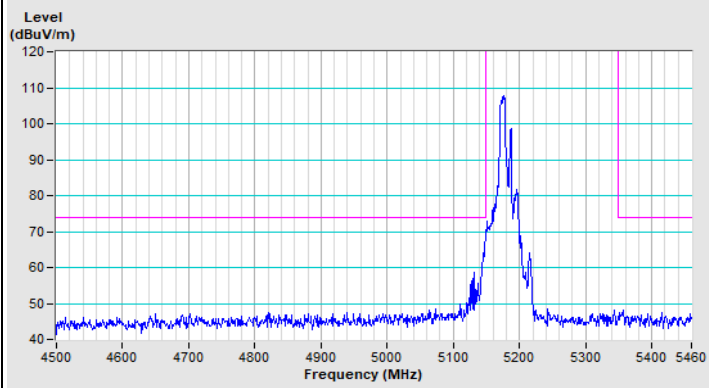


Horizontal (Peak)

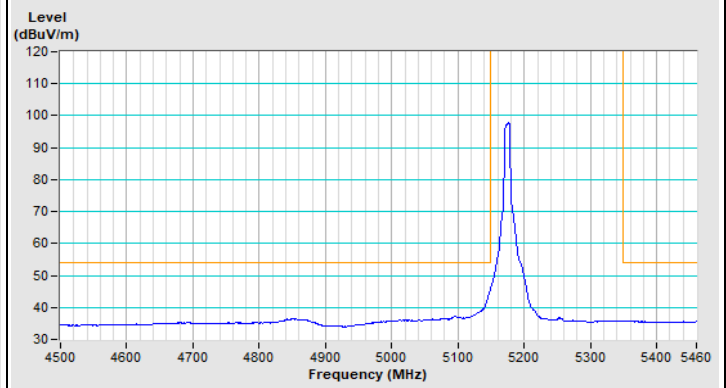

Horizontal (Average)

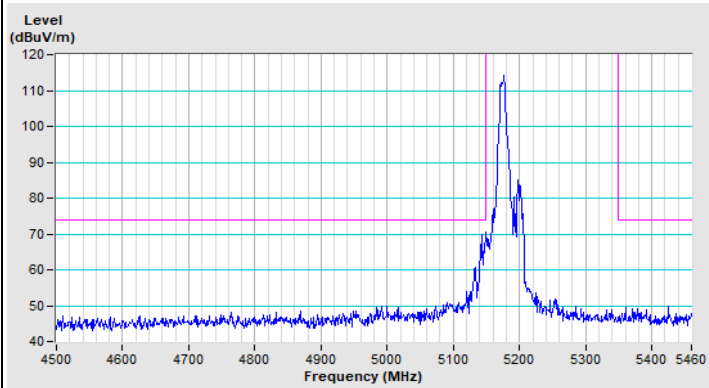


Vertical (Peak)

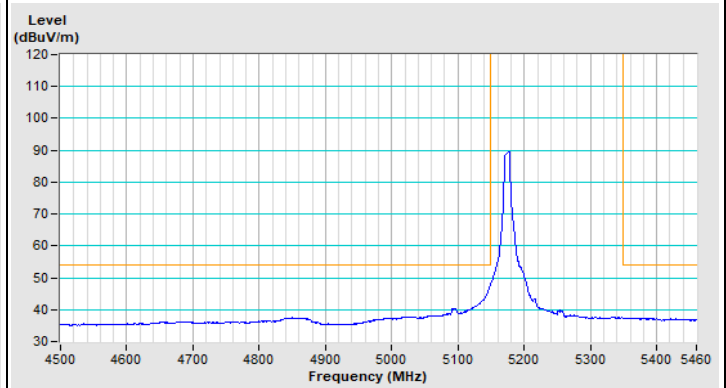


Vertical (Average)


### 802.11ax (HE20) 106-tone RU Channel 64

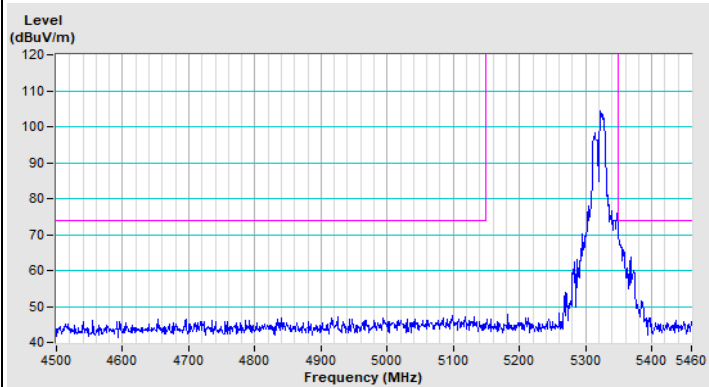


Horizontal (Peak)

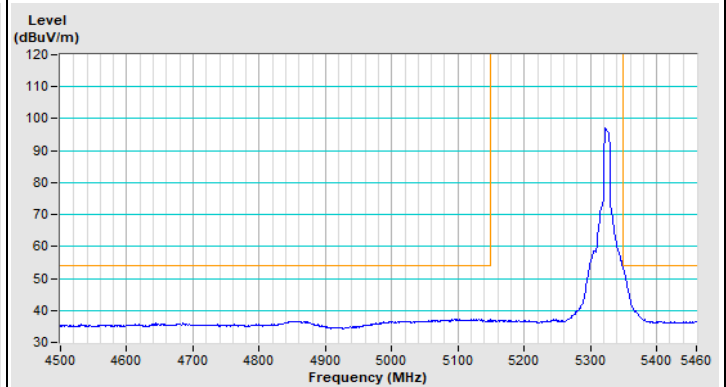

Horizontal (Average)

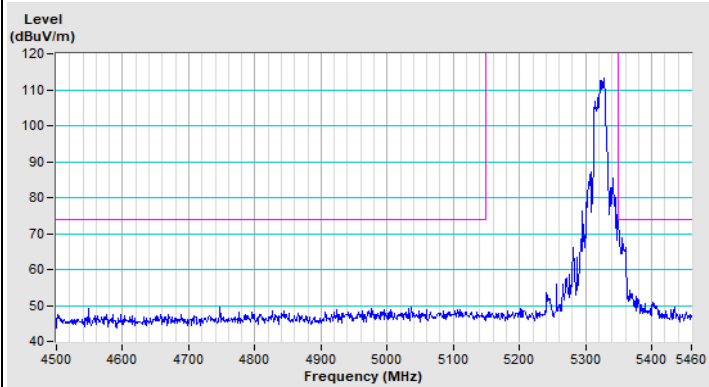


Vertical (Peak)

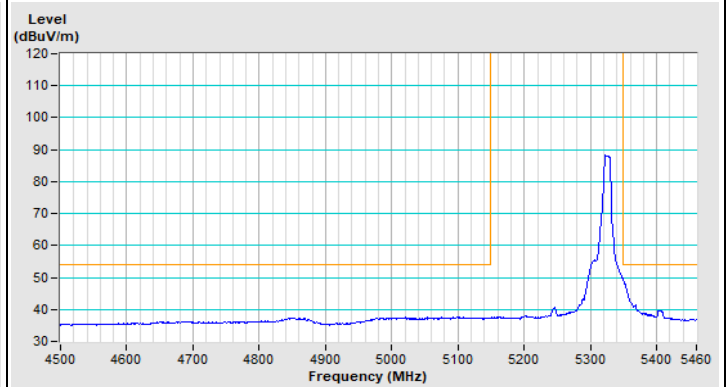


Vertical (Average)


### 802.11ax (HE20) 106-tone RU Channel 100

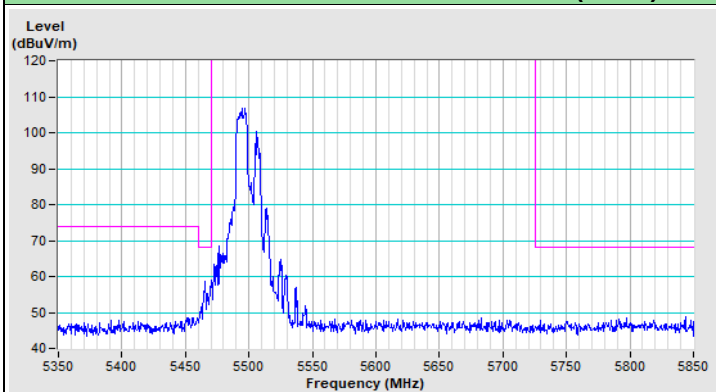


Horizontal (Peak)

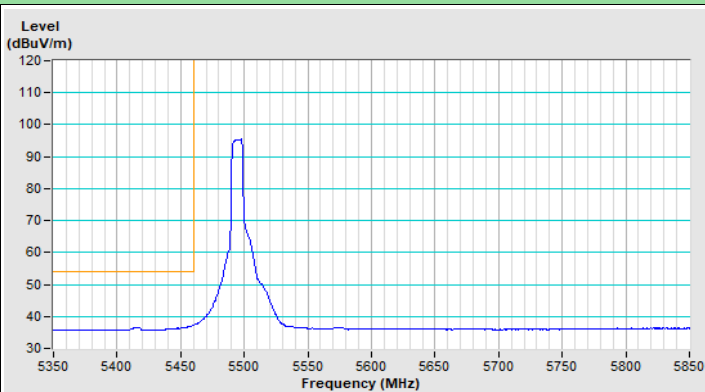

Horizontal (Average)

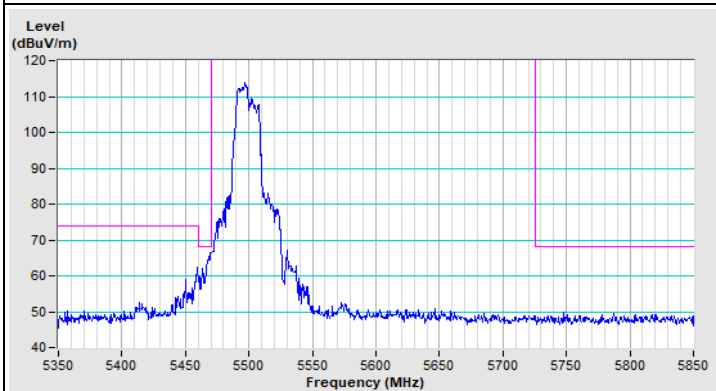


Vertical (Peak)

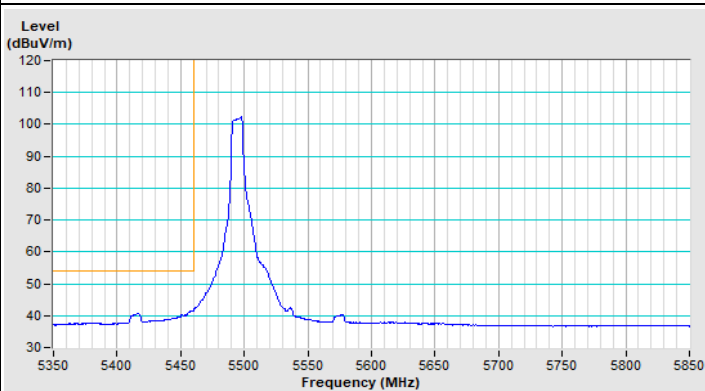


Vertical (Average)

### 802.11ax (HE20) 106-tone RU Channel 149

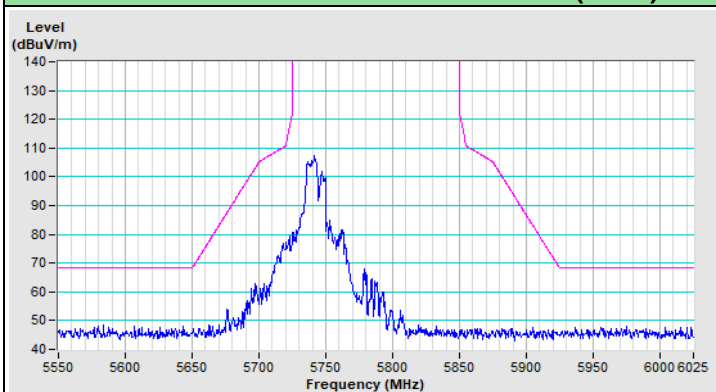


Horizontal (Peak)

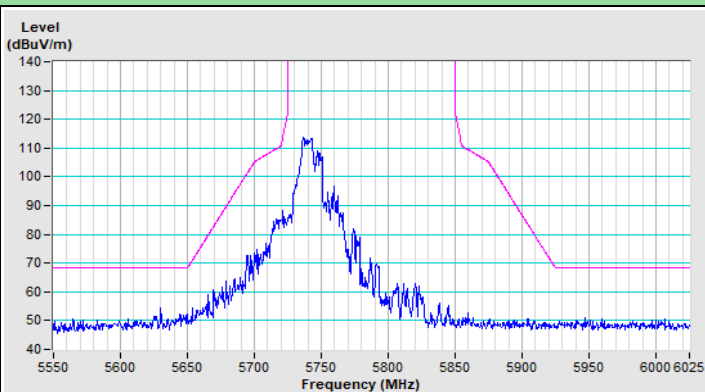


Vertical (Peak)

### 802.11ax (HE20) 106-tone RU Channel 157

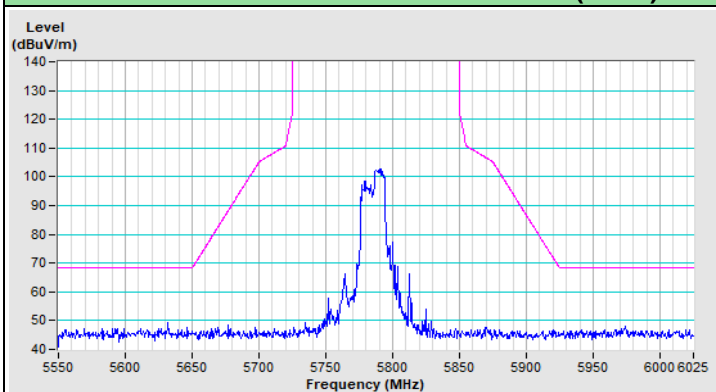


Horizontal (Peak)

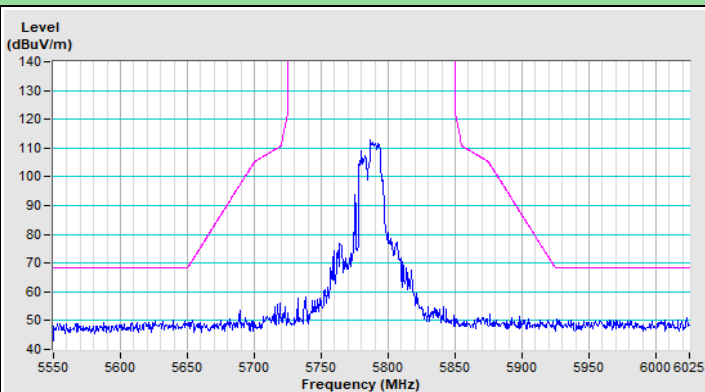


Vertical (Peak)



### 802.11ax (HE20) 106-tone RU Channel 165

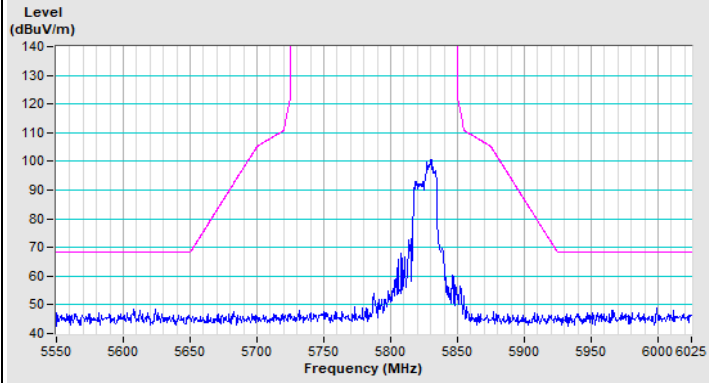

Horizontal (Peak)




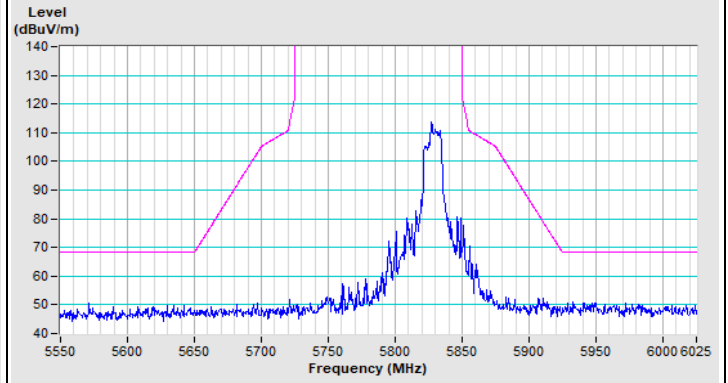


Vertical (Peak)







Plot of Band Edge Mode B


802.11a Channel 36

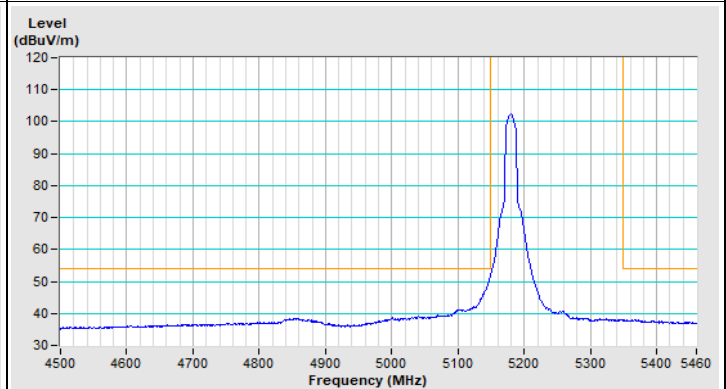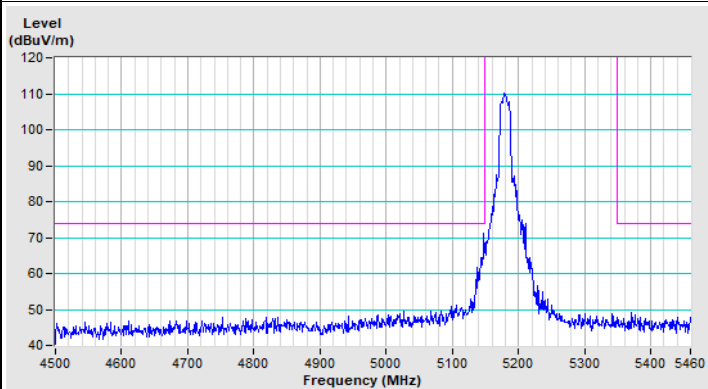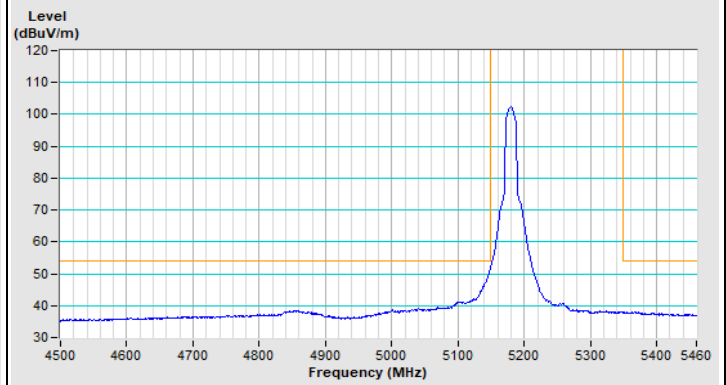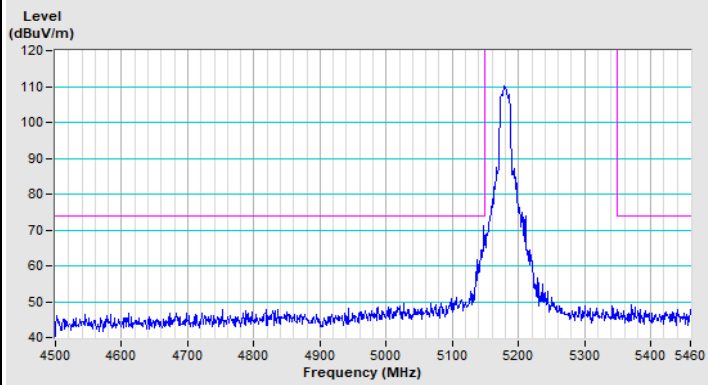


802.11a Channel 64

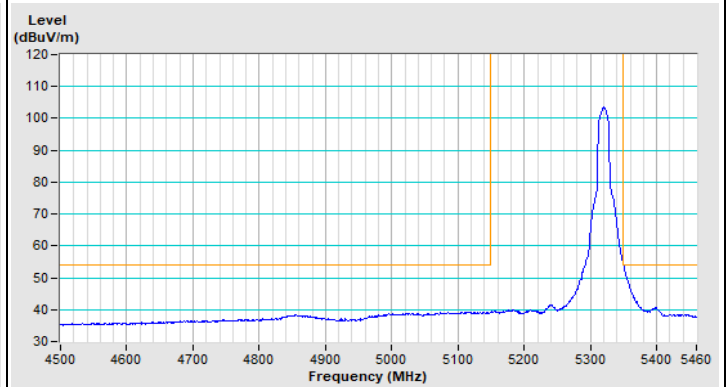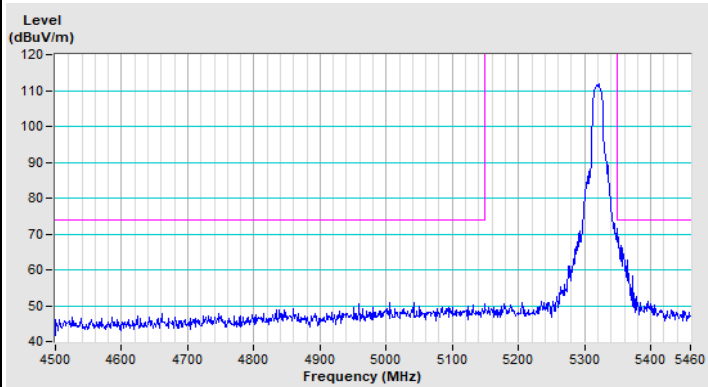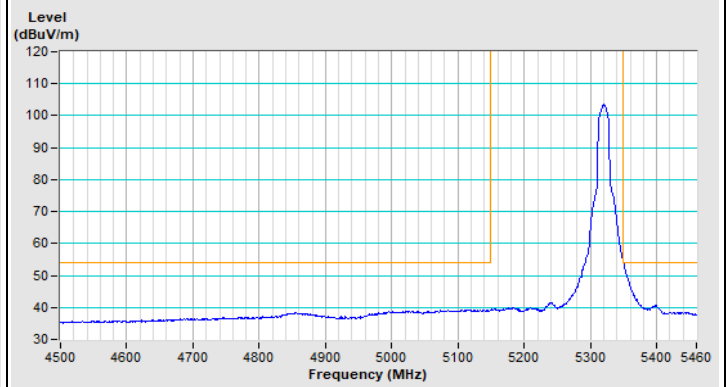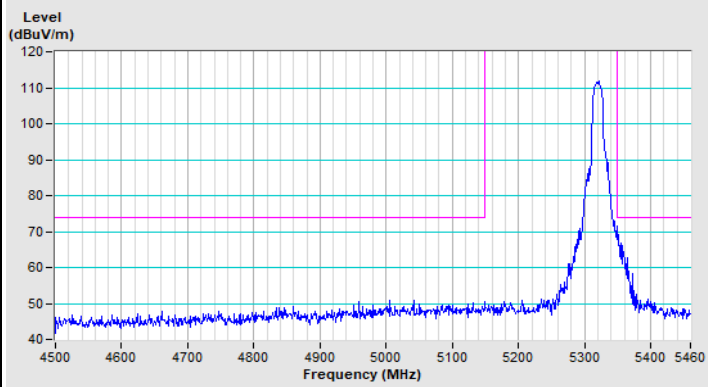


### 802.11a Channel 100

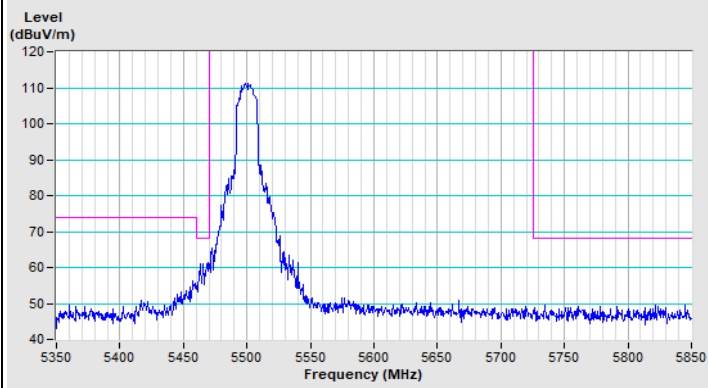


Horizontal (Peak)

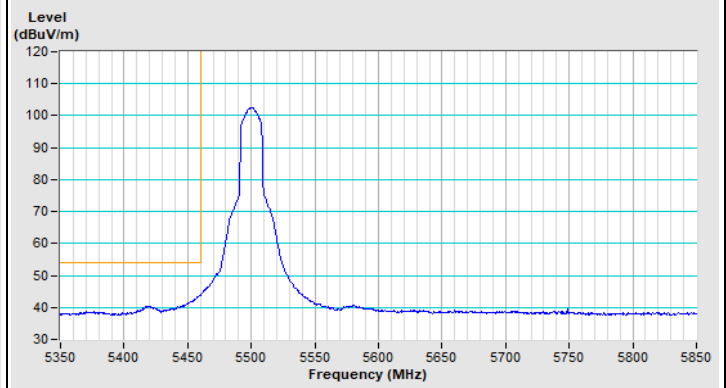

Horizontal (Average)

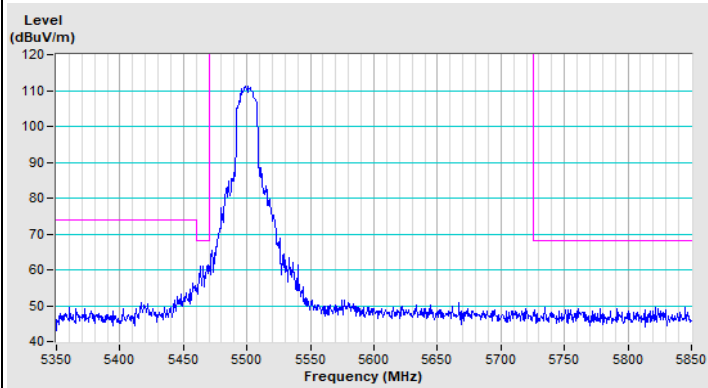


Vertical (Peak)

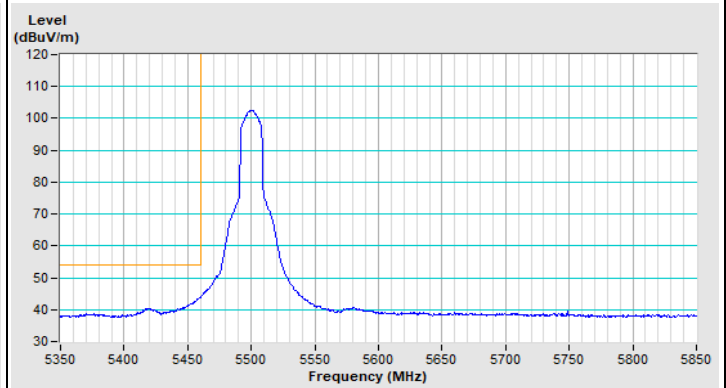


Vertical (Average)

### 802.11a Channel 149

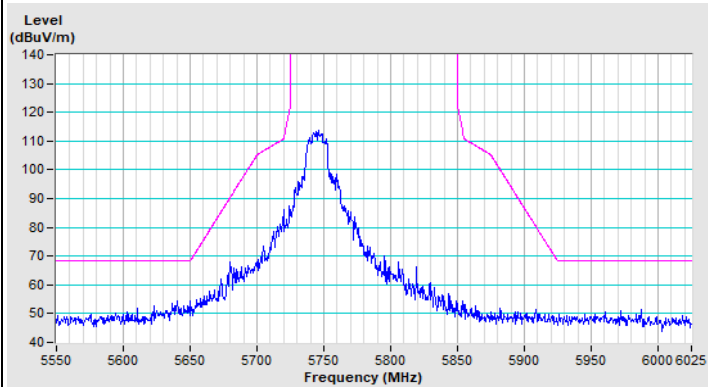


Horizontal (Peak)

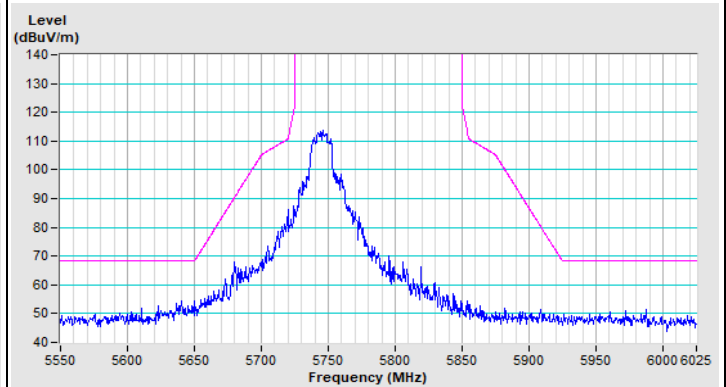


Vertical (Peak)

### 802.11a Channel 157

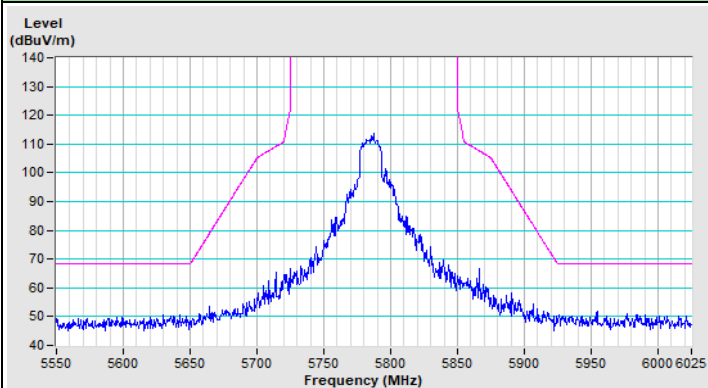


Horizontal (Peak)

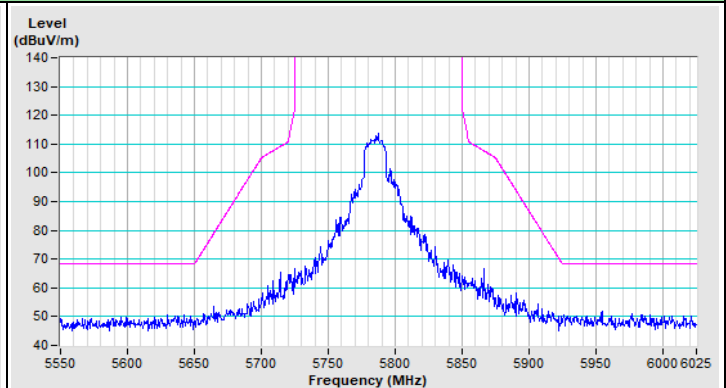


Vertical (Peak)

### 802.11a Channel 165

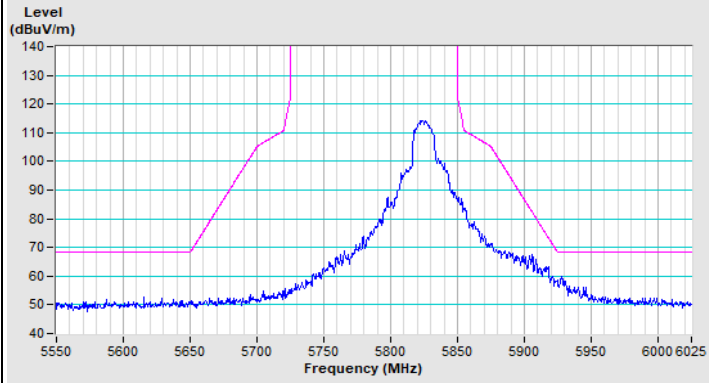


Horizontal (Peak)

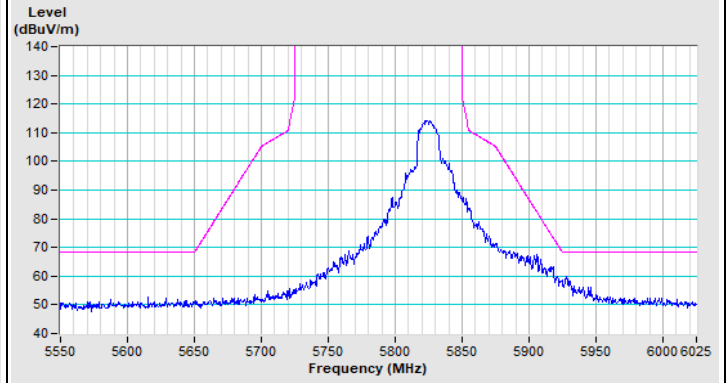


Vertical (Peak)


### 802.11ax (HE20) Channel 36

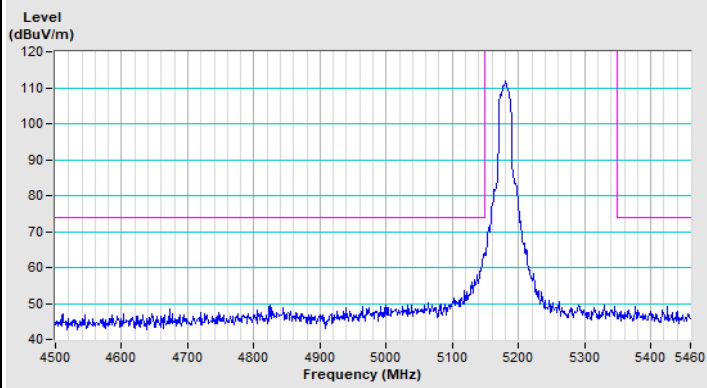


Horizontal (Peak)

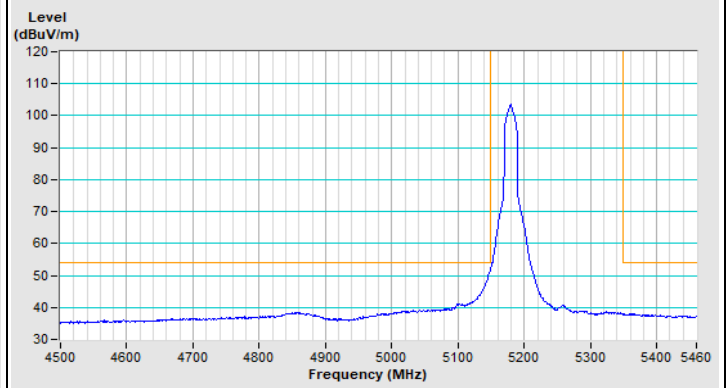

Horizontal (Average)

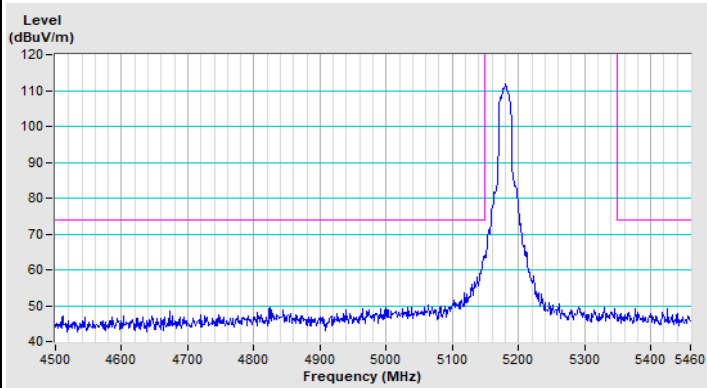


Vertical (Peak)

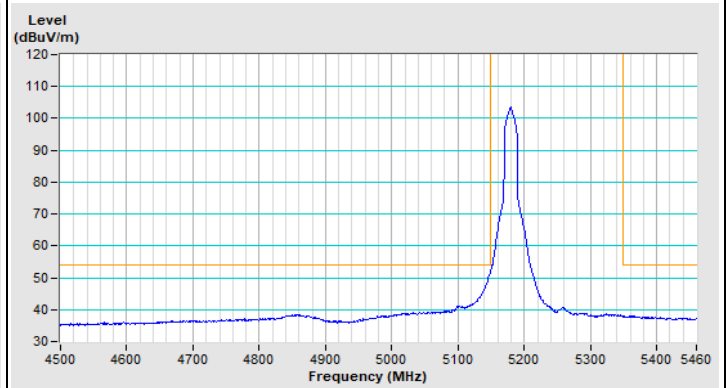


Vertical (Average)


### 802.11ax (HE20) Channel 64

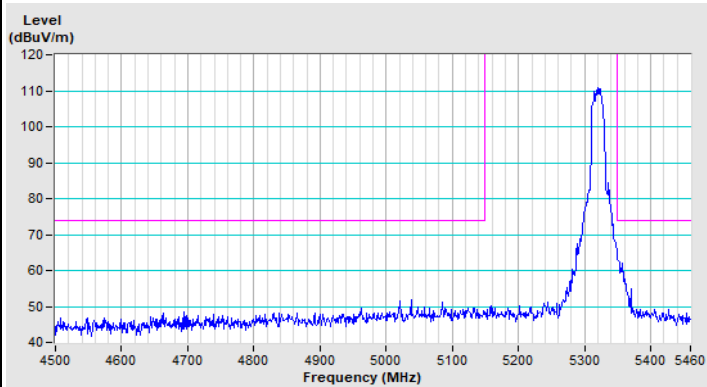


Horizontal (Peak)

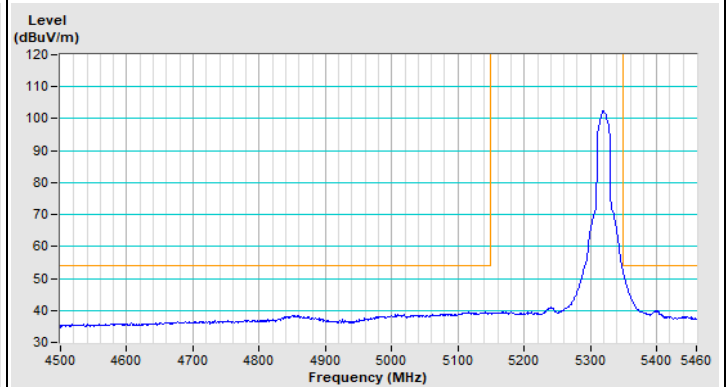

Horizontal (Average)

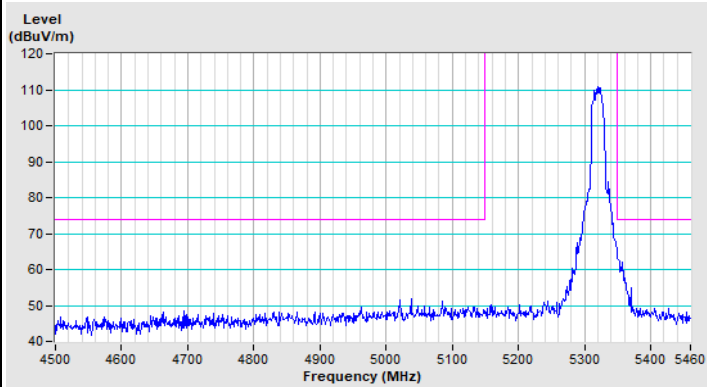


Vertical (Peak)

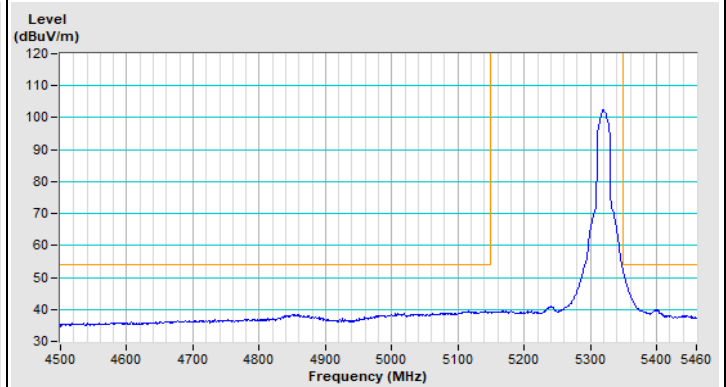


Vertical (Average)


### 802.11ax (HE20) Channel 100

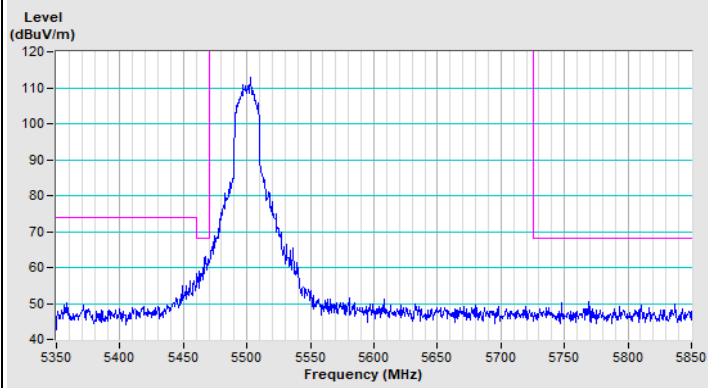


Horizontal (Peak)

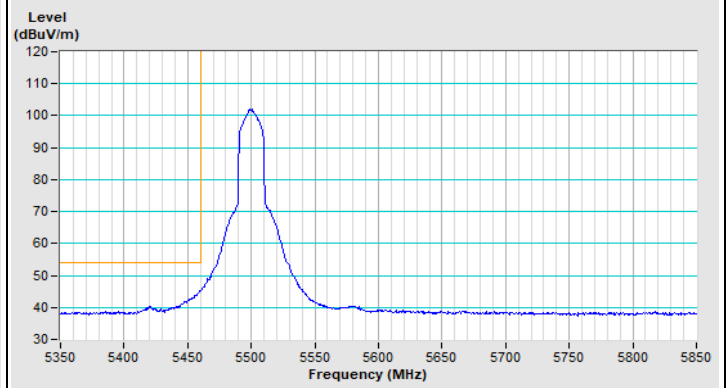

Horizontal (Average)

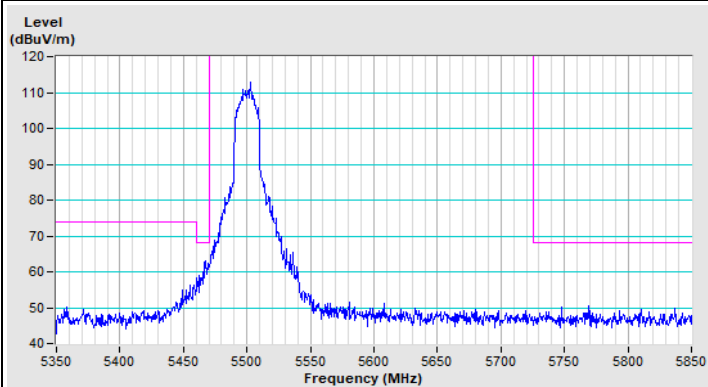


Vertical (Peak)

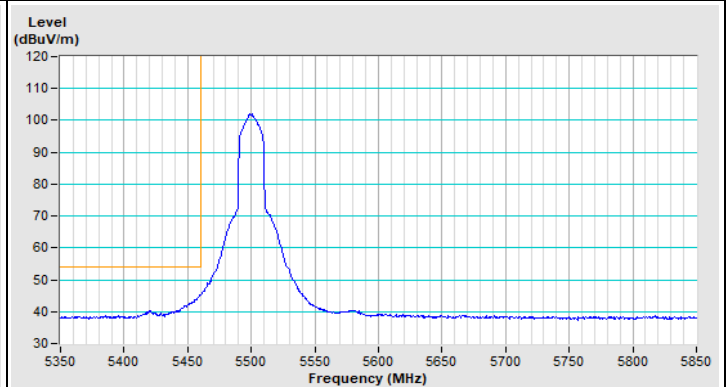


Vertical (Average)

### 802.11ax (HE20) Channel 149

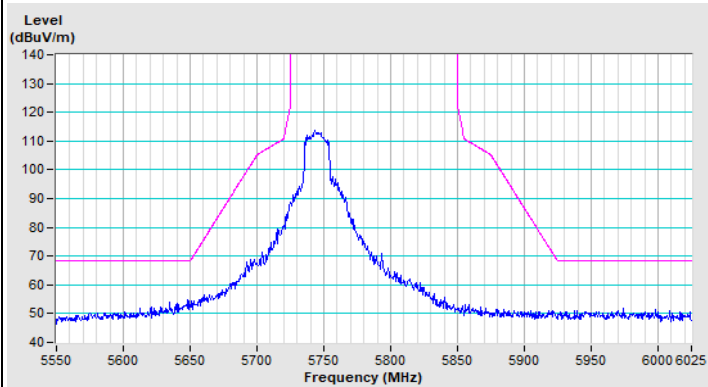


Horizontal (Peak)

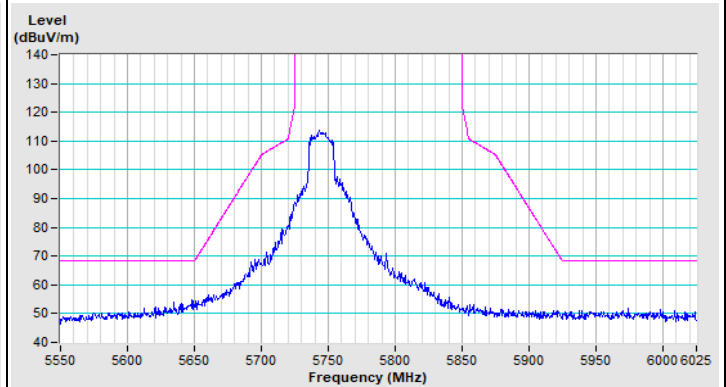


Vertical (Peak)

### 802.11ax (HE20) Channel 157

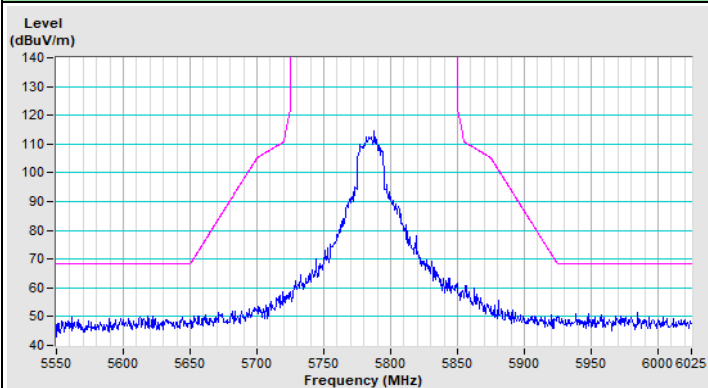


Horizontal (Peak)

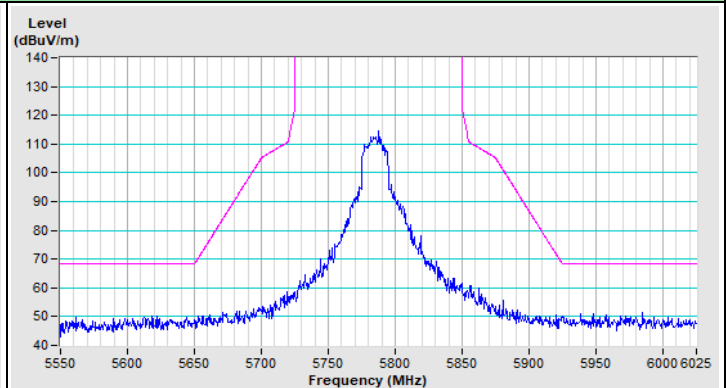


Vertical (Peak)



### 802.11ax (HE20) Channel 165

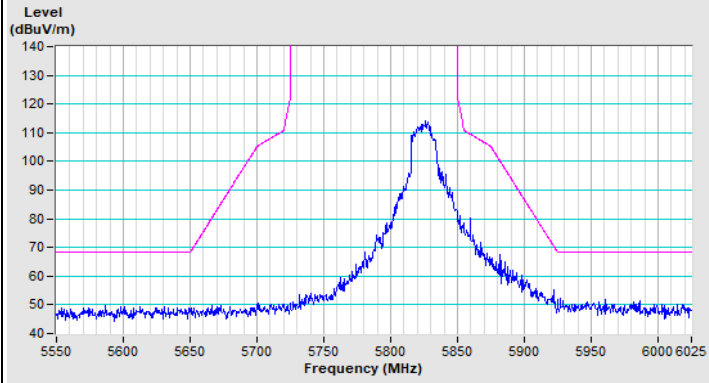

Horizontal (Peak)

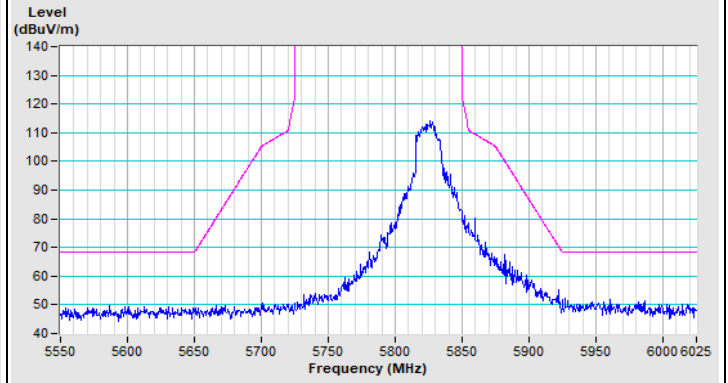

Vertical (Peak)