

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

**Report No.:** RFBBUI-WTW-P22100653

**FCC ID:** TX2-RTL8851BE

**Product:** 11ax RTL8851BE Combo module

**Brand:** REALTEK

**Model No.:** RTL8851BE

**Received Date:** 2022/10/25

**Test Date:** 2022/12/13 ~ 2023/3/25

**Issued Date:** 2023/4/25

**Applicant:** Realtek Semiconductor Corp.

**Address:** No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

**FCC Registration /** 723255 / TW2022

**Designation Number:**

Approved by: \_\_\_\_\_



May Chen / Manager

, Date: \_\_\_\_\_

2023/4/25

This test report consists of 321 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Vito Lung / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Supplementary Information .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description .....	7
3.2 Antenna Description of EUT .....	8
3.3 Channel List .....	9
3.4 Test Mode Applicability and Tested Channel Detail .....	10
3.5 Duty Cycle of Test Signal .....	12
3.6 Test Program Used and Operation Descriptions .....	16
3.7 Connection Diagram of EUT and Peripheral Devices .....	16
3.8 Configuration of Peripheral Devices and Cable Connections .....	18
<b>4 Test Instruments</b> .....	<b>19</b>
4.1 RF Output Power .....	19
4.2 Power Spectral Density .....	19
4.3 6 dB Bandwidth .....	19
4.4 Conducted Out of Band Emissions .....	19
4.5 AC Power Conducted Emissions .....	20
4.6 Unwanted Emissions below 1 GHz .....	20
4.7 Unwanted Emissions above 1 GHz .....	21
<b>5 Limits of Test Items</b> .....	<b>22</b>
5.1 RF Output Power .....	22
5.2 Power Spectral Density .....	22
5.3 6 dB Bandwidth .....	22
5.4 Conducted Out of Band Emissions .....	22
5.5 AC Power Conducted Emissions .....	22
5.6 Unwanted Emissions below 1 GHz .....	22
5.7 Unwanted Emissions above 1 GHz .....	23
<b>6 Test Arrangements</b> .....	<b>24</b>
6.1 RF Output Power .....	24
6.1.1 Test Setup .....	24
6.1.2 Test Procedure .....	24
6.2 Power Spectral Density .....	24
6.2.1 Test Setup .....	24
6.2.2 Test Procedure .....	24
6.3 6 dB Bandwidth .....	25
6.3.1 Test Setup .....	25
6.3.2 Test Procedure .....	25
6.4 Conducted Out of Band Emissions .....	25
6.4.1 Test Setup .....	25
6.4.2 Test Procedure .....	25
6.5 AC Power Conducted Emissions .....	26
6.5.1 Test Setup .....	26
6.5.2 Test Procedure .....	26
6.6 Unwanted Emissions below 1 GHz .....	27
6.6.1 Test Setup .....	27
6.6.2 Test Procedure .....	28
6.7 Unwanted Emissions above 1 GHz .....	29
6.7.1 Test Setup .....	29
6.7.2 Test Procedure .....	29
<b>7 Test Results of Test Item</b> .....	<b>30</b>



7.1	RF Output Power .....	30
7.2	Power Spectral Density .....	35
7.3	6 dB Bandwidth .....	39
7.4	Conducted Out of Band Emissions .....	42
7.5	AC Power Conducted Emissions .....	60
7.6	Unwanted Emissions below 1 GHz .....	62
7.7	Unwanted Emissions above 1 GHz.....	68
<b>8</b>	<b>Pictures of Test Arrangements .....</b>	<b>320</b>
<b>9</b>	<b>Information of the Testing Laboratories .....</b>	<b>321</b>



## Release Control Record

Issue No.	Description	Date Issued
RFBBUI-WTW-P22100653	Original release.	2023/4/25

## 1 Certificate

**Product:** 11ax RTL8851BE Combo module

**Brand:** REALTEK

**Test Model:** RTL8851BE

**Sample Status:** Engineering sample

**Applicant:** Realtek Semiconductor Corp.

**Test Date:** 2022/12/13 ~ 2023/3/25

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

**Measurement** ANSI C63.10-2013

**procedure:** KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -8.54 dB at 0.18906 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -6.6 dB at 45.10 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.8 dB at 2390.00 MHz
15.203	Antenna Requirement	Pass	Antenna connector is IPEX4 not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.5 dB
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.1 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.1 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description

Product	11ax RTL8851BE Combo module
Brand	REALTEK
Test Model	RTL8851BE
Status of EUT	Engineering sample
Power Supply Rating	3.3Vdc from host equipment
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in VHT mode 1024QAM for OFDMA in 11ax mode only
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11g: up to 54 Mbps 802.11n: up to 150 Mbps VHT: up to 200 Mbps 802.11ax: up to 286.8 Mbps
Operating Frequency	2.412 GHz ~ 2.472 GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 13 802.11n (HT40), VHT40, 802.11ax (HE40): 9
Resource Unit (RU)	Single RU: 26-tone, 52-tone, 106-tone, 242-tone, 484-tone
Output Power	578.096 mW (27.62 dBm)

Note:

1. The EUT has below HW SKU configuration, as below table:

SKU No.	Product name	HW Configuration
1	11ax RTL8851BE Combo module	PCIe + USB interface + Dual antenna port

2. There are Bluetooth and WLAN (2.4 GHz & 5 GHz) technology used for the EUT.

3. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (5 GHz)	Bluetooth
2	WLAN (2.4 GHz)	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The EUT support OFDMA and Partial RU mode, therefore partial RU combination were investigated and the worst case scenario was identified.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna NO.	RF Chain NO.	Brand	Model	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Length (mm)
1	Chain 1	REALTEK	RTK-ANT-0022	3.4	2.4~2.4835GHz	PIFA	IPEX4	300
				5	5.15~5.895GHz			
	Chain 2	REALTEK	RTK-ANT-0022	3.4	2.4~2.4835GHz	PIFA	IPEX4	300
				5	5.15~5.895GHz			
2	Chain 1	Aristotle	RFA-27-C38H1-MHF4300	3	2.4~2.4835GHz	Dipole	IPEX4	300
				5	5.15~5.895GHz			
	Chain 2	Aristotle	RFA-27-C38H1-MHF4300	3	2.4~2.4835GHz	Dipole	IPEX4	300
				5	5.15~5.895GHz			
3	Chain 1	LYNwave	ALX22F-120AA0-00	3.2	2.4~2.4835GHz	Monopole	IPEX4	200
				4	5.15~5.895GHz			
	Chain 2	LYNwave	ALX22F-120AA0-00	3.2	2.4~2.4835GHz	Monopole	IPEX4	200
				4	5.15~5.895GHz			

Note:

1. Max. gain was selected for the final test, except for Unwanted Emissions.

\* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a SISO function:

2.4 GHz Band		
Modulation Mode	TX & RX Configuration	
<b>802.11b</b>	1TX Diversity	1RX
<b>802.11g</b>	1TX Diversity	1RX
<b>802.11n (HT20)</b>	1TX Diversity	1RX
<b>802.11n (HT40)</b>	1TX Diversity	1RX
<b>VHT20</b>	1TX Diversity	1RX
<b>VHT40</b>	1TX Diversity	1RX
<b>802.11ax (HE20)</b>	1TX Diversity	1RX
<b>802.11ax (HE40)</b>	1TX Diversity	1RX
<b>802.11ax (RU26/52/106/242/484)</b>	1TX Diversity	1RX

Note:

1. The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz) and VHT mode for 20 MHz (40 MHz), therefore the manufacturer will control the power for 802.11n/VHT mode is the same as the 802.11ax or more lower than it and investigated worst case to representative mode in test report.



### 3.3 Channel List

13 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	8	2447 MHz
2	2417 MHz	9	2452 MHz
3	2422 MHz	10	2457 MHz
4	2427 MHz	11	2462 MHz
5	2432 MHz	12	2467 MHz
6	2437 MHz	13	2472 MHz
7	2442 MHz		

9 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422 MHz	8	2447 MHz
4	2427 MHz	9	2452 MHz
5	2432 MHz	10	2457 MHz
6	2437 MHz	11	2462 MHz
7	2442 MHz		

### 3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	<p>1. PIFA/Monopole ANT can be used in the following ways: X / Y / Z axis. Pre-scan in these ways and find the worst case as a representative test condition.</p> <p>2. For Partial RU modes of 20MHz and 40MHz bandwidth needs to be pre-worst.</p> <p>3. EUT has two antennas, but only single antenna diversity function: Chain1/Chain2. Prescan in these ways to find the worst case as a representative test condition.</p> <p>4. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).</p>
Worst Case:	<p>1. PIFA/Monopole ANT the worst case was found when positioned on (X / Y / Z axis): Unwanted Emissions below 1 GHz Y axis worst, and Unwanted Emissions above 1 GHz Y axis worst for PIFA ANT; Unwanted Emissions below 1 GHz X axis worst, and Unwanted Emissions above 1 GHz X axis worst for Monopole ANT.</p> <p>2. The worst case occurs in 20MHz bandwidth (partial RU 26/52/106).</p> <p>3. Chain1/Chain2 single-antenna transmission Worst Condition: Chain1</p> <p>4. Dipole ANT was used typical placement for the test: Y axis.</p>

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Tested Channel	Modulation	Data Rate Parameter	RU Configuration
RF Output Power	-	802.11b	1, 6, 11, 12, 13	DBPSK	1Mb/s	-
		802.11g	1, 6, 11, 12, 13	BPSK	6Mb/s	-
		VHT20	1, 6, 11, 12, 13	BPSK	MCS0	-
		VHT40	3, 6, 9, 10, 11	BPSK	MCS0	-
		802.11ax (HE20)	1, 6, 11, 12, 13	BPSK	MCS0	-
		802.11ax (HE40)	3, 6, 9, 10, 11	BPSK	MCS0	-
		20 MHz Preamble 802.11ax (RU26)	1, 6, 11, 12, 13	BPSK	MCS0	26/0, 26/4, 26/8, 26/8, 26/8
		20 MHz Preamble 802.11ax (RU52)	1, 6, 11, 12, 13	BPSK	MCS0	52/37, 52/39, 52/40, 52/40, 52/40
		20 MHz Preamble 802.11ax (RU106)	1, 6, 11, 12, 13	BPSK	MCS0	106/53, 106/54, 106/54, 106/54, 106/54

6 dB Bandwidth / Conducted Out of Band Emissions / Power Spectral Density	-	802.11b	1, 6, 11, 12, 13	DBPSK	1Mb/s	-
		802.11g	1, 6, 11, 12, 13	BPSK	6Mb/s	-
		802.11ax (HE20)	1, 6, 11, 12, 13	BPSK	MCS0	-
		802.11ax (HE40)	3, 6, 9, 10, 11	BPSK	MCS0	-
		20 MHz Preamble 802.11ax (RU26)	1, 6, 11, 12, 13	BPSK	MCS0	26/0, 26/4, 26/8, 26/8, 26/8
		20 MHz Preamble 802.11ax (RU52)	1, 6, 11, 12, 13	BPSK	MCS0	52/37, 52/39, 52/40, 52/40, 52/40
		20 MHz Preamble 802.11ax (RU106)	1, 6, 11, 12, 13	BPSK	MCS0	106/53, 106/54, 106/54, 106/54, 106/54
AC Power Conducted Emissions	B	802.11g	6	BPSK	6Mb/s	-
Unwanted Emissions below 1 GHz	A, B, C	802.11g	6	BPSK	6Mb/s	-
Unwanted Emissions above 1 GHz	A, B, C	802.11b	1, 6, 11, 12, 13	DBPSK	1Mb/s	-
		802.11g	1, 6, 11, 12, 13	BPSK	6Mb/s	-
		802.11ax (HE20)	1, 6, 11, 12, 13	BPSK	MCS0	-
		802.11ax (HE40)	3, 6, 9, 10, 11	BPSK	MCS0	-
		20 MHz Preamble 802.11ax (RU26)	1, 6, 11, 12, 13	BPSK	MCS0	26/0, 26/4, 26/8, 26/8, 26/8
		20 MHz Preamble 802.11ax (RU52)	1, 6, 11, 12, 13	BPSK	MCS0	52/37, 52/39, 52/40, 52/40, 52/40
		20 MHz Preamble 802.11ax (RU106)	1, 6, 11, 12, 13	BPSK	MCS0	106/53, 106/54, 106/54, 106/54, 106/54
EUT Configure Mode:	A	with Dipole Antenna				
	B	with PIFA Antenna				
	C	with Monopole Antenna				

### 3.5 Duty Cycle of Test Signal

**802.11b:** Duty cycle = 8.194 ms / 8.199 ms x 100% = 99.9%

**802.11g:** Duty cycle = 1.361 ms / 1.368 ms x 100% = 99.5%

**VHT20:** Duty cycle = 1.168 ms / 1.175 ms x 100% = 99.4%

**VHT40:** Duty cycle = 8.194 ms / 8.199 ms x 100% = 99.9%


**802.11ax (HE20):** Duty cycle = 1.168 ms / 1.175 ms x 100% = 99.4%

**802.11ax (HE40):** Duty cycle = 8.194 ms / 8.199 ms x 100% = 99.9%


**802.11ax (HE) 26-tone RU:** Duty cycle = 5.433 ms / 5.438 ms x 100% = 99.9%

**802.11ax (HE) 52-tone RU:** Duty cycle = 2.757 ms / 2.762 ms x 100% = 99.8%


**802.11ax (HE) 106-tone RU:** Duty cycle = 1.329 ms / 1.334 ms x 100% = 99.6%

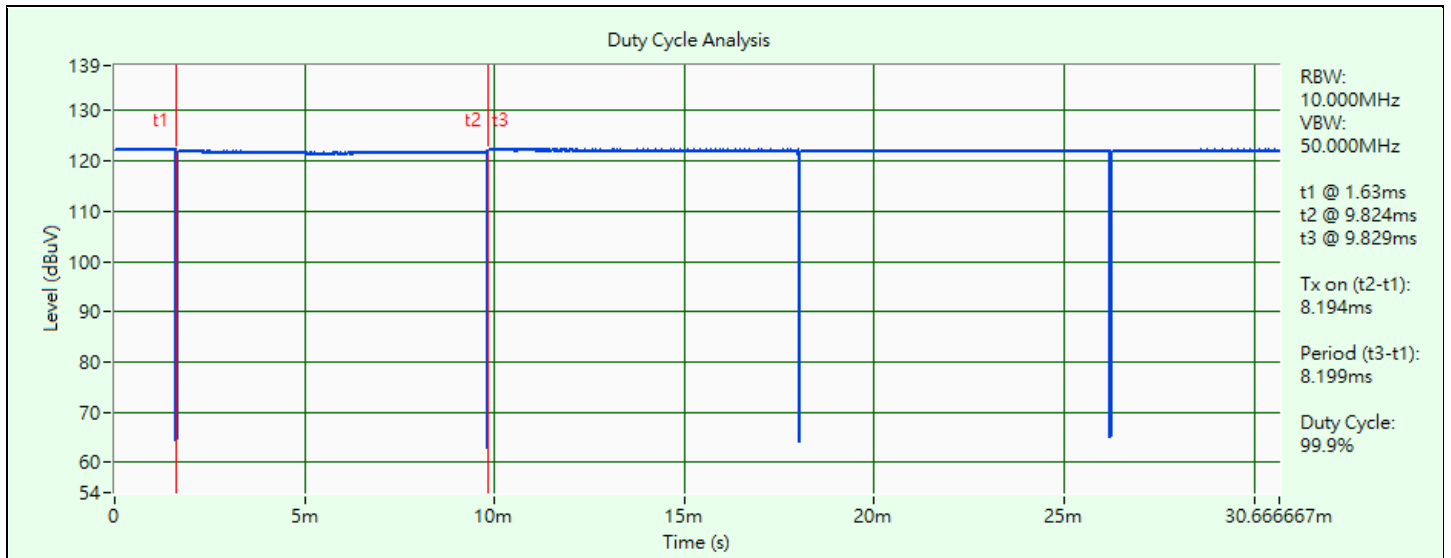


802.11b

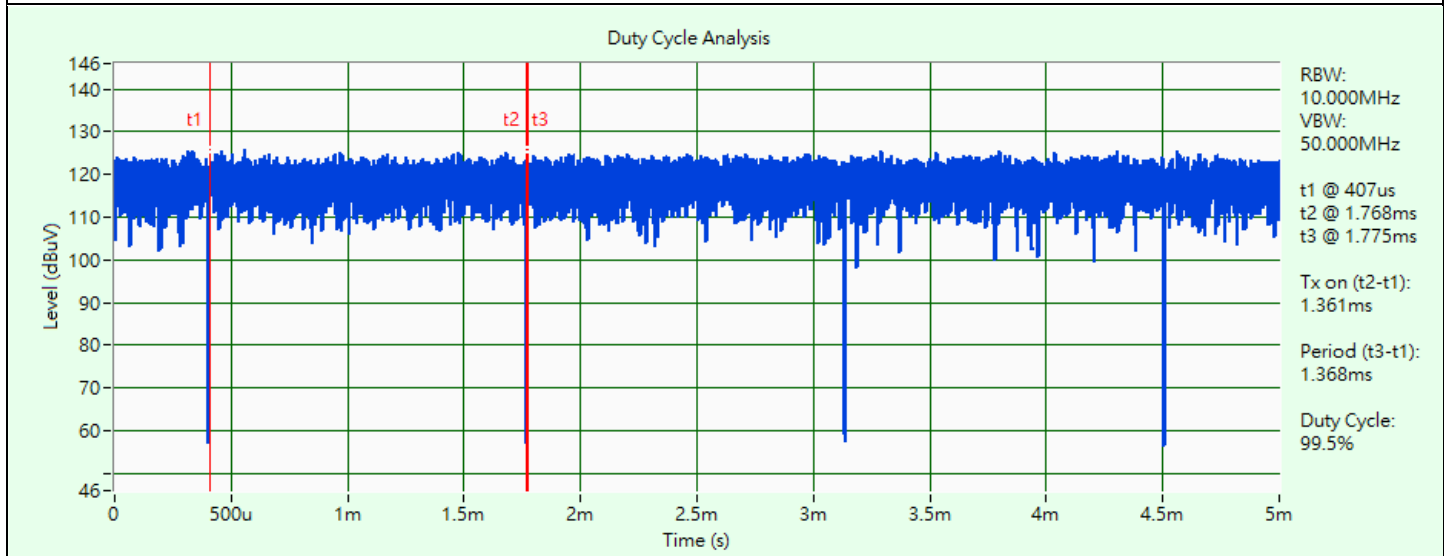


802.11g

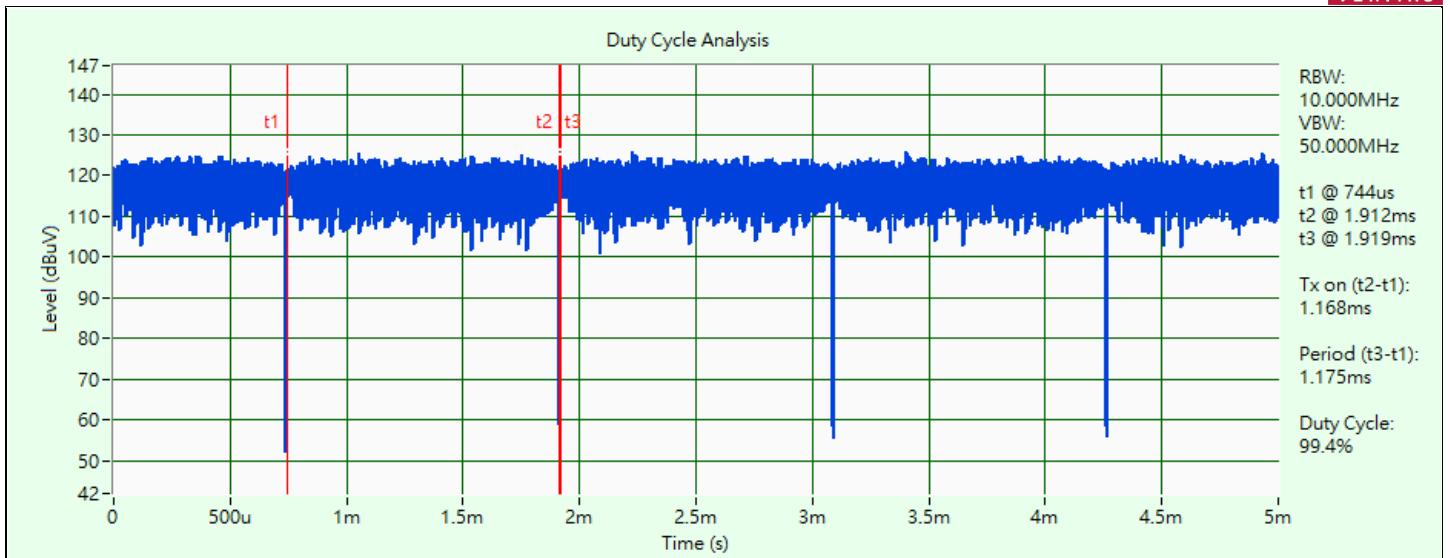

VHT20

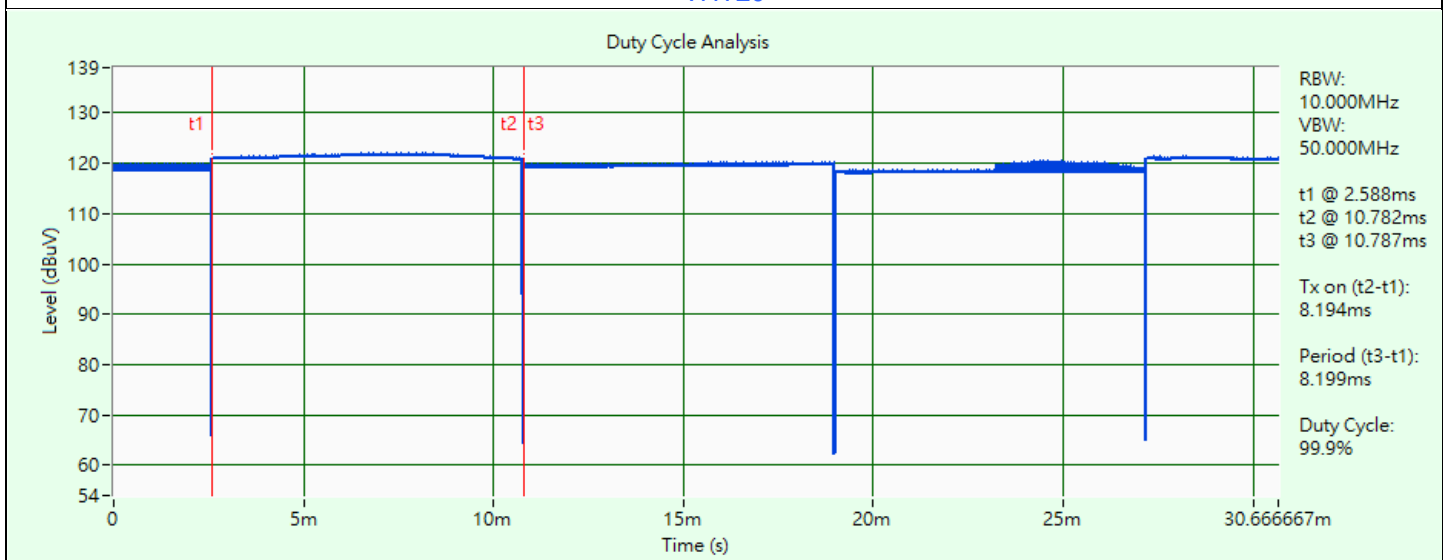


VHT40

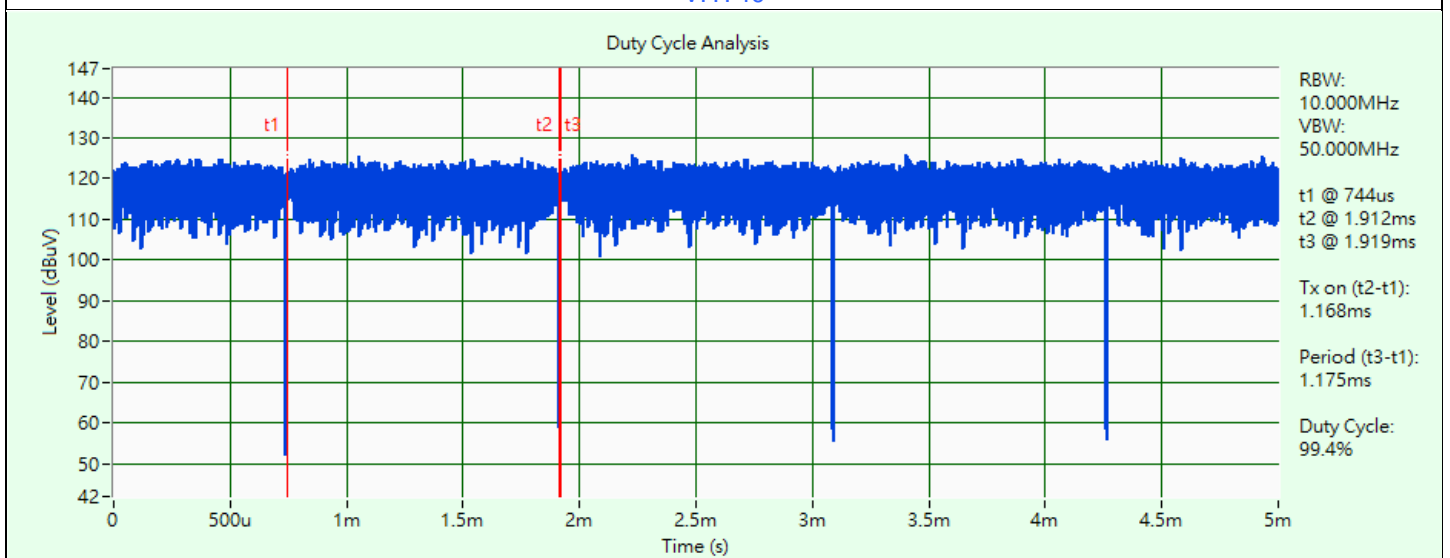


802.11ax (HE20)

Duty Cycle Analysis

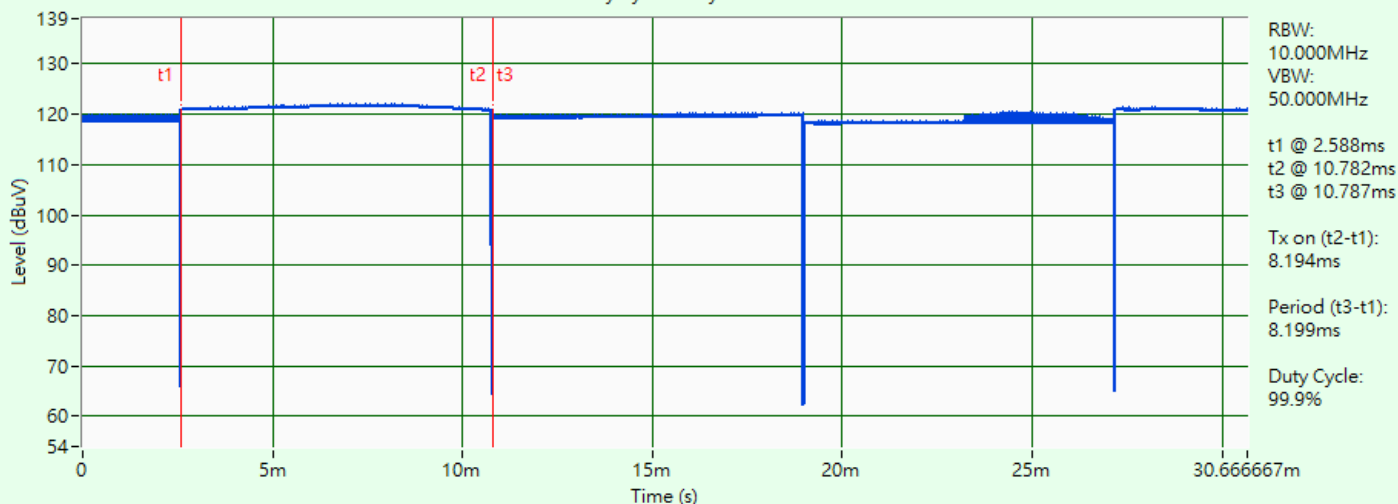


802.11ax (HE40)

Duty Cycle Analysis

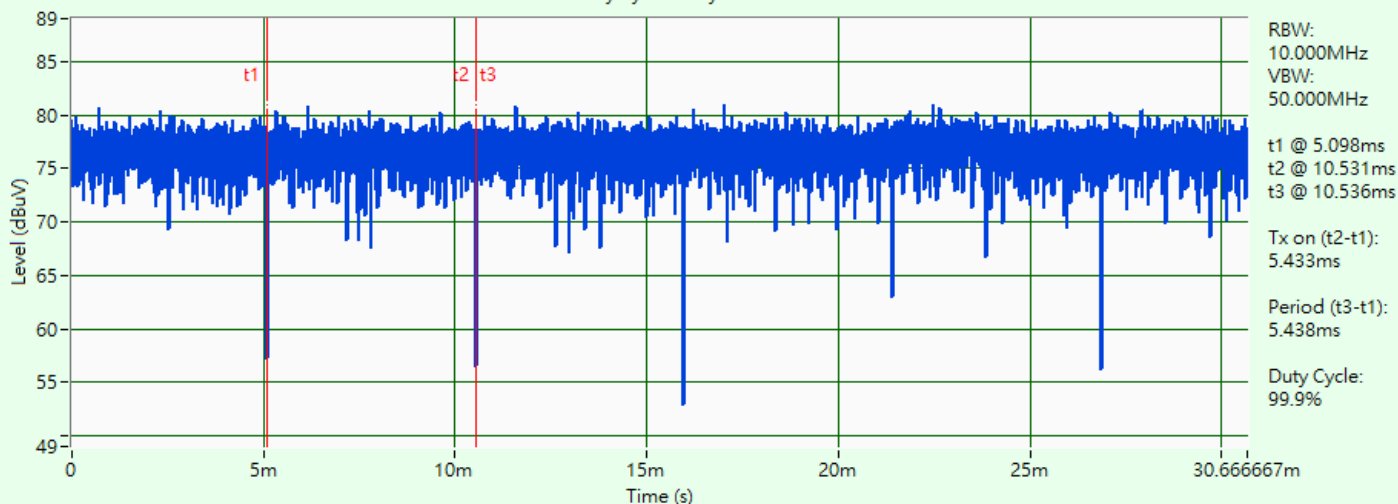


802.11ax (HE) 26-tone RU

Duty Cycle Analysis

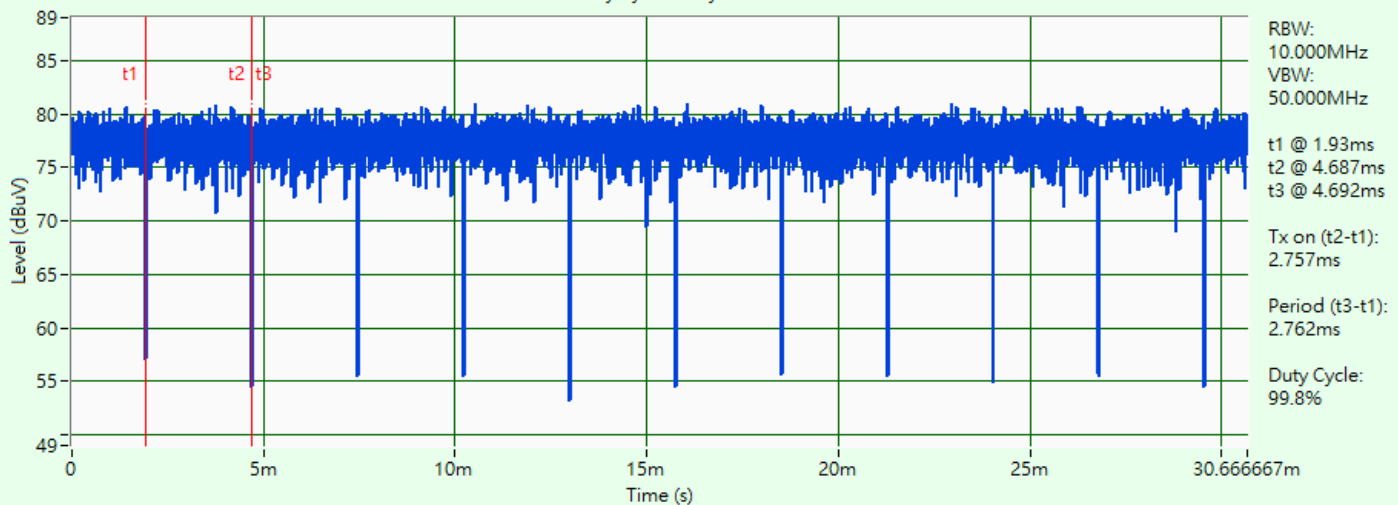

802.11ax (HE) 52-tone RU

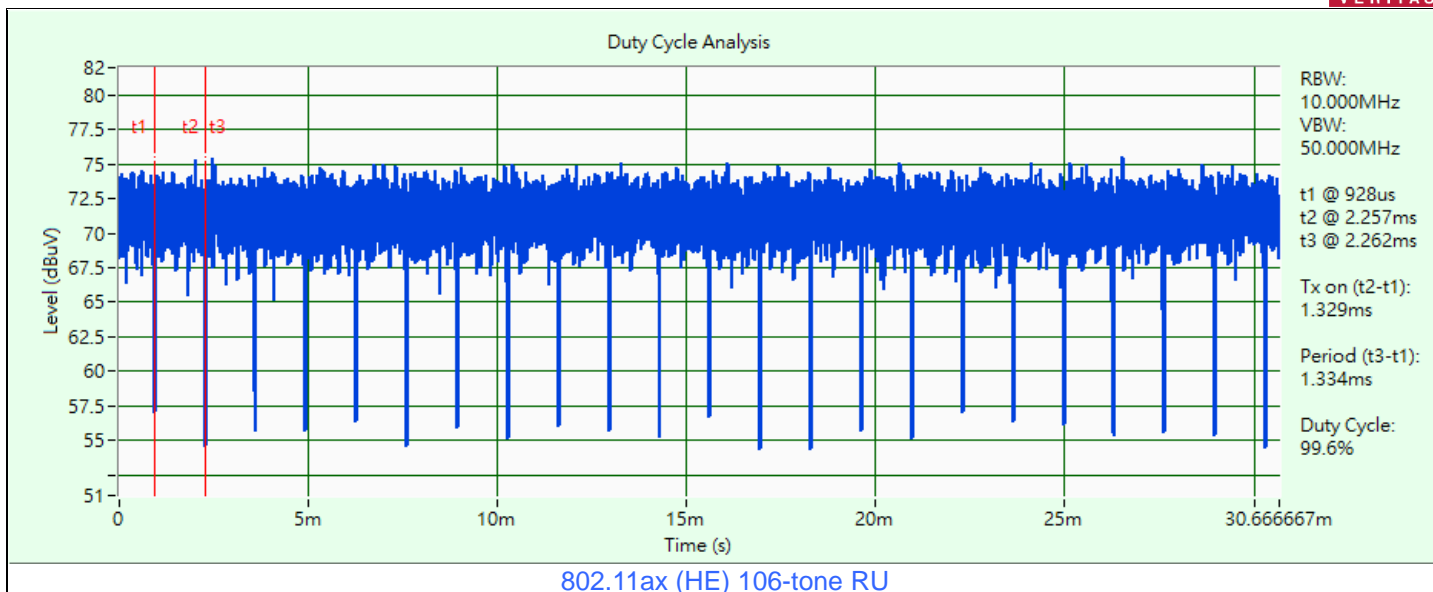


### 3.6 Test Program Used and Operation Descriptions

Controlling software (RTL8851B\_PCIE\_MP\_Package\_ALPHA\_v2.0.20\_homologation(94894)) has been activated to set the EUT under transmission condition continuously at specific channel frequency.


### 3.7 Connection Diagram of EUT and Peripheral Devices

#### For Unwanted Emission Test

##### Mode A

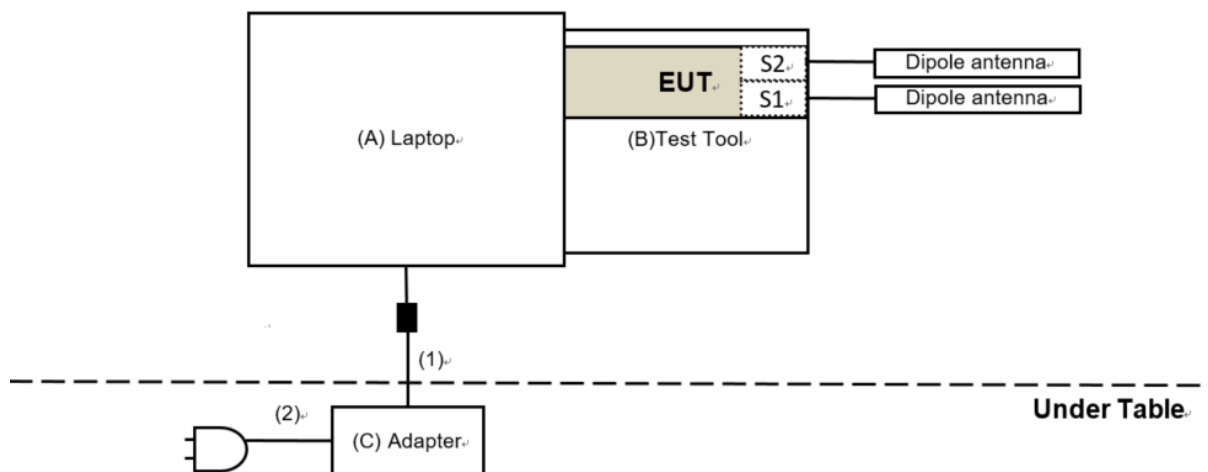


##### Mode B

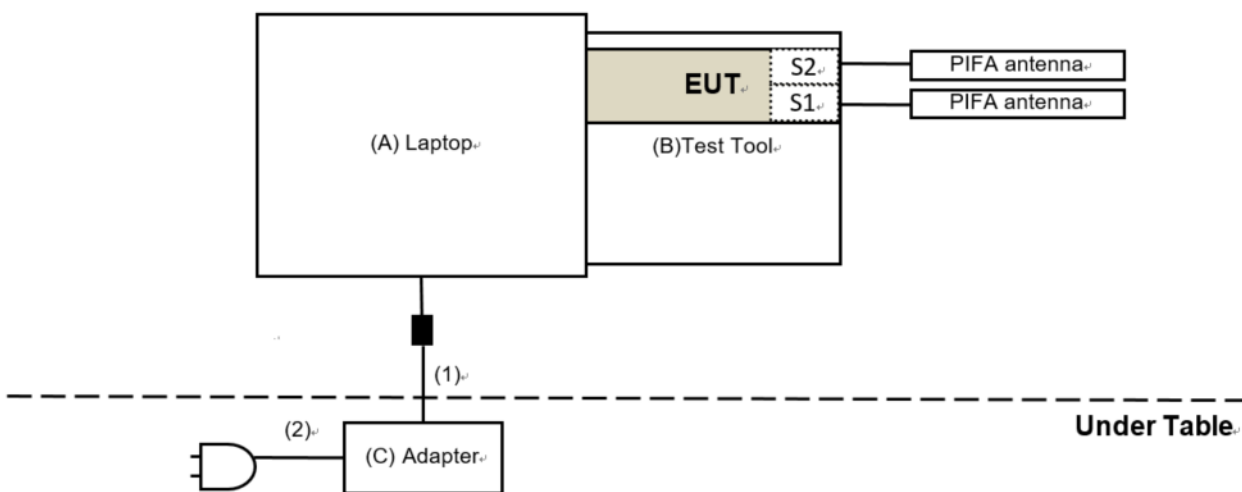




Mode C

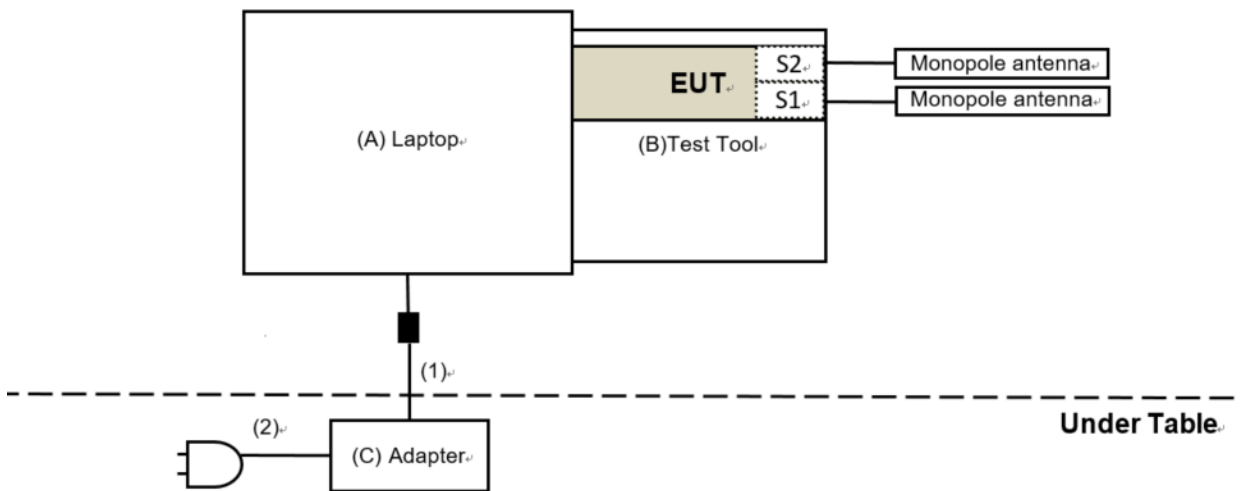

For AC Power Conducted Emission Test

Mode B

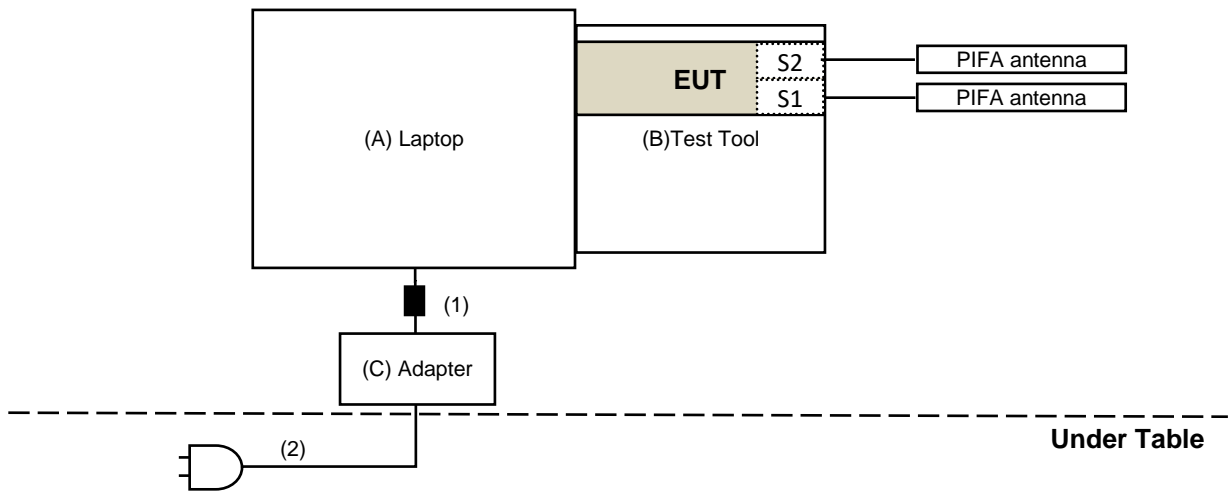

### 3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Dell	E5420	FHNS4S1	N/A	Provided by Lab
B	Test Tool	Realtek	N/A	N/A	N/A	Supplied by applicant
C	Adapter	Dell	FA65NE0-00	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.8	No	1	Provided by Lab
2	AC Cable	0	1	No	0	Provided by Lab

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Power Meter Anritsu	ML2495A	1529002	2022/6/22	2023/6/21
Pulse Power Sensor Anritsu	MA2411B	1726434	2022/6/22	2023/6/21

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/3/23 ~ 2023/3/25

### 4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2022/4/5	2023/4/4
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer Keysight	N9020B	MY60112409	2023/2/18	2024/2/17

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/3/23 ~ 2023/3/25

### 4.3 6 dB Bandwidth

Refer to section 4.2 to get information of the instruments.

### 4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get information of the instruments.

#### 4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance	N/A	EMC-01	2022/9/27	2023/9/26
Fixed attenuator STI	STI02-2200-10	005	2022/8/24	2023/8/23
LISN R&S	ESH3-Z5	848773/004	2022/10/18	2023/10/17
RF Coaxial Cable JYEBO	5D-FB	COCCAB-001	2022/8/24	2023/8/23
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A
TEST RECEIVER R&S	ESCS 30	847124/029	2022/10/14	2023/10/13

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2023/3/21

#### 4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bilog Antenna Schwarzbeck	VULB 9168	9168-0842	2022/10/24	2023/10/23
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-02	2022/12/28	2023/12/27
LOOP ANTENNA Electro-Metrics	EM-6879	264	2023/2/21	2024/2/20
Pre_Amplifier Agilent	8447D	2944A10636	2023/3/12	2024/3/11
Pre_Amplifier EMCI	EMC330N	980538	2022/4/25	2023/4/24
RF Coaxial Cable COMMATE/PEWC	8D	966-5-1	2023/2/18	2024/2/17
		966-5-2	2023/2/18	2024/2/17
		966-5-3	2023/2/18	2024/2/17
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2022/12/19	2023/12/18
		LOOPCAB-002	2022/12/19	2023/12/18
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A
Spectrum Analyzer Keysight	N9020B	MY60112410	2023/3/6	2024/3/5
Test Receiver R&S	ESR3	102528	2023/2/10	2024/2/9

Notes:

1. The test was performed in 966 Chamber No. 5.
2. Tested Date: 2023/3/24

#### 4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-1819	2022/11/13	2023/11/12
	BBHA 9170	9170-739	2022/11/13	2023/11/12
Pre_Amplifier EMCI	EMC12630SE	980509	2022/4/25	2023/4/24
	EMC184045SE	980387	2022/1/10 2022/12/28	2023/1/9 2023/12/27
RF Cable-Frequency range: 1- 40GHz EMCI	EMC102-KM-KM-1200	160924	2022/1/10 2022/12/28	2023/1/9 2023/12/27
RF Coaxial Cable EMCI	EMC-KM-KM-4000	200214	2022/3/8 2023/2/20	2023/3/7 2024/2/19
	EMC104-SM-SM-1500	180503	2022/4/25	2023/4/24
	EMC104-SM-SM-2000	180501	2022/4/25	2023/4/24
	EMC104-SM-SM-6000	180506	2022/4/25	2023/4/24
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A
Spectrum Analyzer Keysight	N9020B	MY60112410	2022/3/13 2023/3/6	2023/3/12 2024/3/5
Test Receiver R&S	ESR3	102528	2022/2/25 2023/2/10	2023/2/24 2024/2/9

Notes:

1. The test was performed in 966 Chamber No. 5.
2. Tested Date: 2022/12/13 ~ 2023/3/14

## 5 Limits of Test Items

### 5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

### 5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

### 5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

### 5.4 Conducted Out of Band Emissions

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

## 5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


### Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## 6 Test Arrangements

### 6.1 RF Output Power

#### 6.1.1 Test Setup

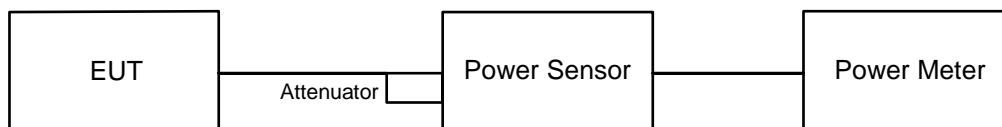

#### 6.1.2 Test Procedure

##### Peak Power:


A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

##### Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 6.2 Power Spectral Density

#### 6.2.1 Test Setup

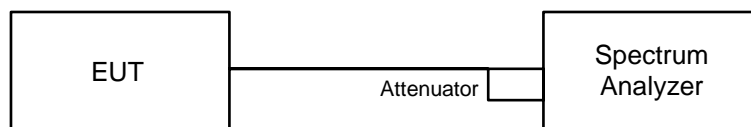


#### 6.2.2 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: 3 kHz.
- d. Set the VBW  $\geq 3 \times$  RBW.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.



### 6.3 6 dB Bandwidth

#### 6.3.1 Test Setup

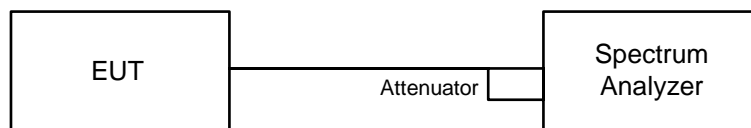


#### 6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.4 Conducted Out of Band Emissions

#### 6.4.1 Test Setup

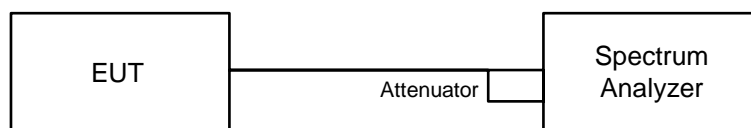

#### 6.4.2 Test Procedure

##### MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW  $\geq 300$  kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

##### MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW  $\geq 300$  kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

## 6.5 AC Power Conducted Emissions

### 6.5.1 Test Setup

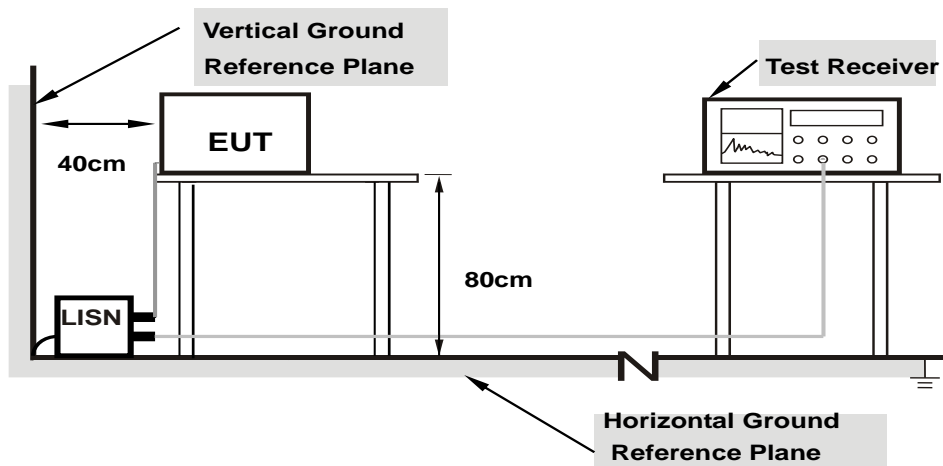

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.5.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


## 6.6 Unwanted Emissions below 1 GHz

### 6.6.1 Test Setup

#### For Radiated emission below 30 MHz

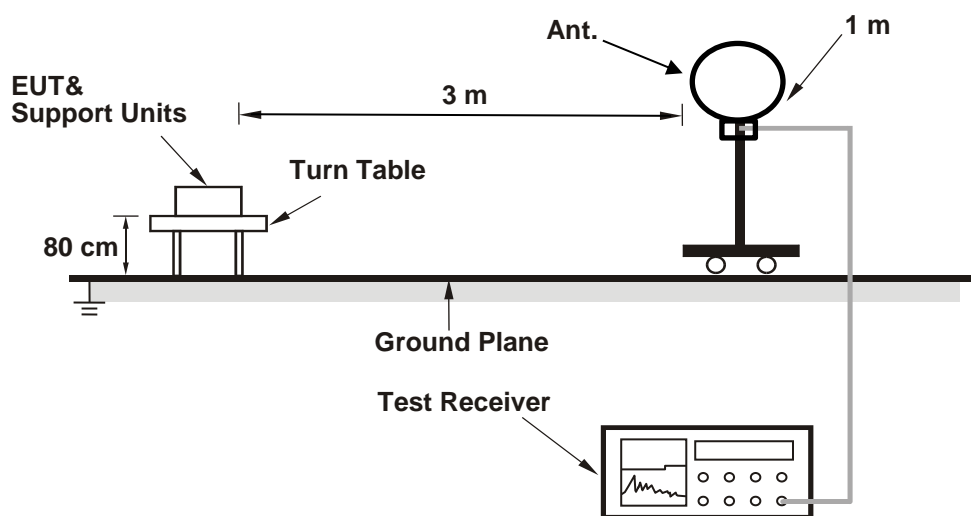

#### For Radiated emission above 30 MHz

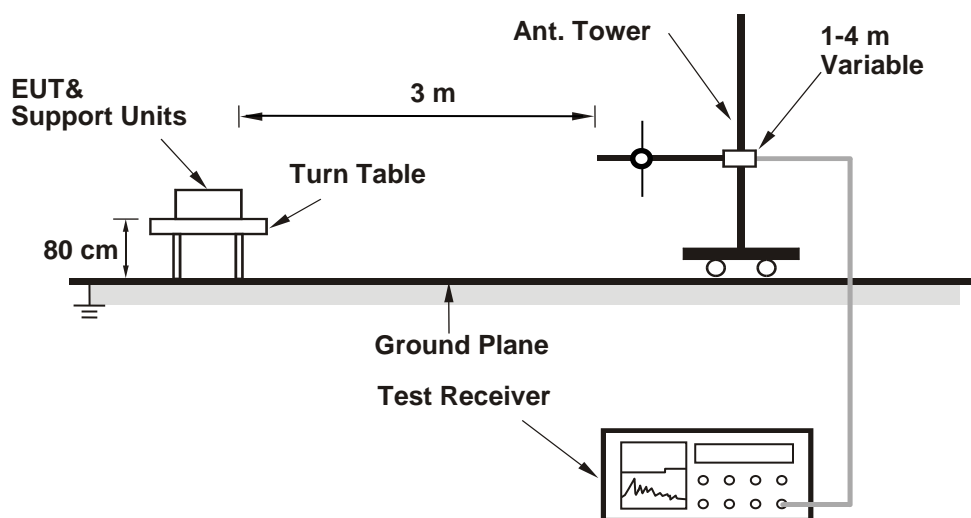

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 6.6.2 Test Procedure

### For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

### For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

## 6.7 Unwanted Emissions above 1 GHz

### 6.7.1 Test Setup

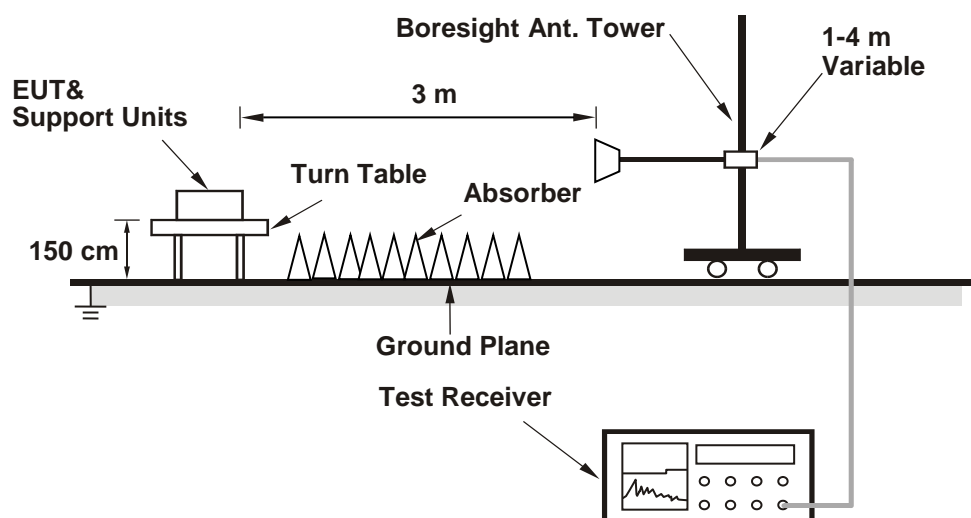

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10 Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

## 7 Test Results of Test Item

### 7.1 RF Output Power

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Katina Lu
--------------	---------	---------------------------	--------------	------------	-----------

#### For Peak Power

##### 802.11b

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	206.063	23.14	30	Pass
6	2437	248.313	23.95	30	Pass
11	2462	187.932	22.74	30	Pass
12	2467	78.524	18.95	30	Pass
13	2472	34.119	15.33	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

##### 802.11g

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	279.898	24.47	30	Pass
6	2437	578.096	27.62	30	Pass
11	2462	281.838	24.50	30	Pass
12	2467	258.821	24.13	30	Pass
13	2472	260.016	24.15	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

##### VHT20

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	264.241	24.22	30	Pass
6	2437	535.797	27.29	30	Pass
11	2462	263.633	24.21	30	Pass
12	2467	127.644	21.06	30	Pass
13	2472	132.739	21.23	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

### VHT40

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
3	2422	266.073	24.25	30	Pass
6	2437	442.588	26.46	30	Pass
9	2452	265.461	24.24	30	Pass
10	2457	255.859	24.08	30	Pass
11	2462	248.886	23.96	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	280.543	24.48	30	Pass
6	2437	570.164	27.56	30	Pass
11	2462	281.838	24.50	30	Pass
12	2467	135.831	21.33	30	Pass
13	2472	146.218	21.65	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
3	2422	281.838	24.50	30	Pass
6	2437	463.447	26.66	30	Pass
9	2452	279.898	24.47	30	Pass
10	2457	280.543	24.48	30	Pass
11	2462	264.85	24.23	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE) 26-tone RU

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	163.682	22.14	30	Pass
6	2437	276.058	24.41	30	Pass
11	2462	143.549	21.57	30	Pass
12	2467	125.314	20.98	30	Pass
13	2472	55.719	17.46	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE) 52-tone RU

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	280.543	24.48	30	Pass
6	2437	277.332	24.43	30	Pass
11	2462	281.838	24.50	30	Pass
12	2467	272.27	24.35	30	Pass
13	2472	53.951	17.32	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE) 106-tone RU

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	278.612	24.45	30	Pass
6	2437	277.971	24.44	30	Pass
11	2462	279.898	24.47	30	Pass
12	2467	280.543	24.48	30	Pass
13	2472	53.088	17.25	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

### For Average Power

#### 802.11b

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	162.93	22.12
6	2437	156.675	21.95
11	2462	146.555	21.66
12	2467	46.881	16.71
13	2472	27.04	14.32

#### 802.11g

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	125.603	20.99
6	2437	163.305	22.13
11	2462	109.144	20.38
12	2467	67.453	18.29
13	2472	54.45	17.36



**VHT20**

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	115.611	20.63
6	2437	143.88	21.58
11	2462	96.828	19.86
12	2467	67.92	18.32
13	2472	71.45	18.54

**VHT40**

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
3	2422	77.09	18.87
6	2437	105.925	20.25
9	2452	113.24	20.54
10	2457	97.724	19.90
11	2462	69.823	18.44

**802.11ax (HE20)**

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	122.744	20.89
6	2437	152.757	21.84
11	2462	103.514	20.15
12	2467	71.45	18.54
13	2472	76.56	18.84

**802.11ax (HE40)**

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
3	2422	81.658	19.12
6	2437	113.24	20.54
9	2452	119.399	20.77
10	2457	103.039	20.13
11	2462	74.817	18.74

### 802.11ax (HE) 26-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	48.195	16.83
6	2437	165.959	22.20
11	2462	39.537	15.97
12	2467	32.434	15.11
13	2472	11.117	10.46

### 802.11ax (HE) 52-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	82.985	19.19
6	2437	165.196	22.18
11	2462	76.56	18.84
12	2467	65.163	18.14
13	2472	10.568	10.24

### 802.11ax (HE) 106-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	106.414	20.27
6	2437	157.761	21.98
11	2462	87.7	19.43
12	2467	55.335	17.43
13	2472	10.116	10.05

## 7.2 Power Spectral Density

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Katina Lu
--------------	---------	---------------------------	--------------	------------	-----------

### 802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-1.56	8	Pass
6	2437	0.65	8	Pass
11	2462	-2.22	8	Pass
12	2467	-4.98	8	Pass
13	2472	-7.88	8	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the power density limit shall not be reduced.

### 802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-4.48	8	Pass
6	2437	-1.50	8	Pass
11	2462	-6.77	8	Pass
12	2467	-9.62	8	Pass
13	2472	-8.49	8	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the power density limit shall not be reduced.

### 802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-6.85	8	Pass
6	2437	-4.54	8	Pass
11	2462	-8.11	8	Pass
12	2467	-10.01	8	Pass
13	2472	-6.70	8	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the power density limit shall not be reduced.

### 802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
3	2422	-13.32	8	Pass
6	2437	-8.37	8	Pass
9	2452	-12.22	8	Pass
10	2457	-8.74	8	Pass
11	2462	-10.48	8	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the power density limit shall not be reduced.

### 802.11ax (HE) 26-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-1.76	8	Pass
6	2437	4.52	8	Pass
11	2462	-2.36	8	Pass
12	2467	-2.58	8	Pass
13	2472	-7.53	8	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the power density limit shall not be reduced.

### 802.11ax (HE) 52-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-1.14	8	Pass
6	2437	3.85	8	Pass
11	2462	-0.88	8	Pass
12	2467	-1.41	8	Pass
13	2472	-9.09	8	Pass


Note: The antenna gain is 3.4 dBi < 6 dBi, so the power density limit shall not be reduced.

### 802.11ax (HE) 106-tone RU


Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-2.23	8	Pass
6	2437	-0.66	8	Pass
11	2462	-3.22	8	Pass
12	2467	-5.39	8	Pass
13	2472	-12.58	8	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the power density limit shall not be reduced.


### Spectrum Plot of Maximum Value

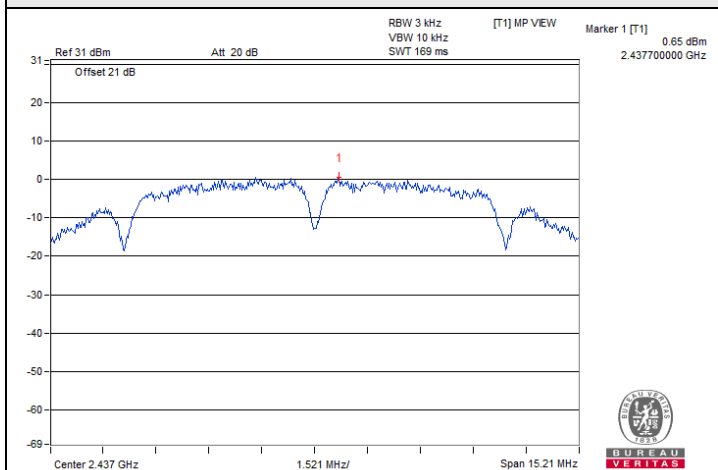


802.11b : CH 6

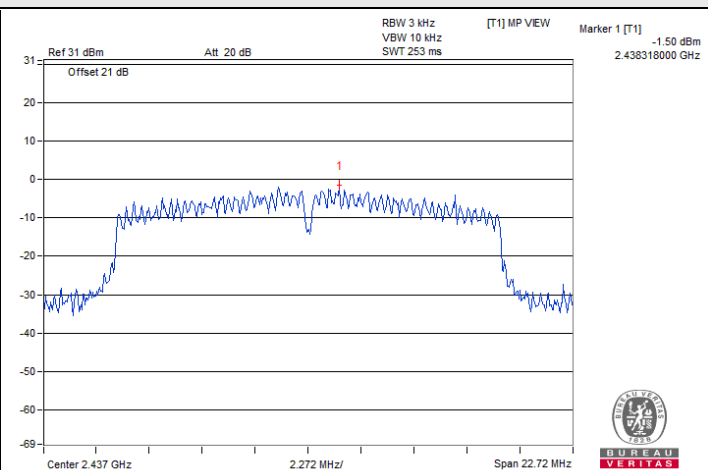


802.11g : CH 6

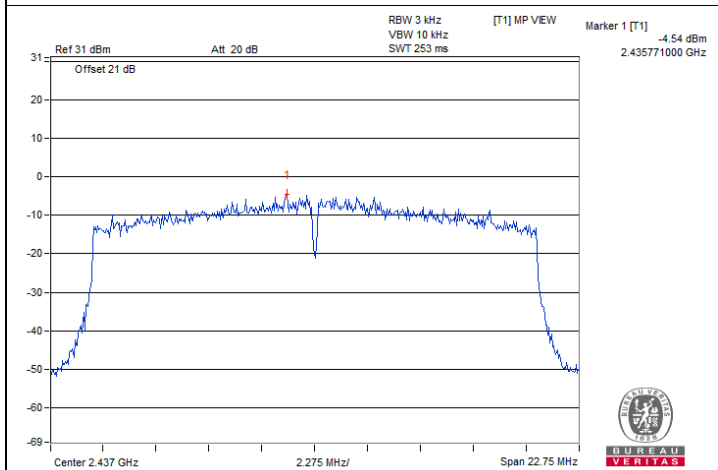


802.11ax (HE20) : CH 6

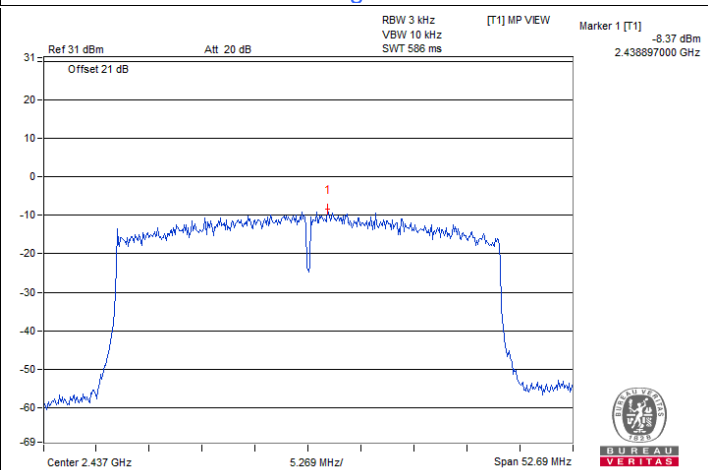

802.11ax (HE40) : CH 6

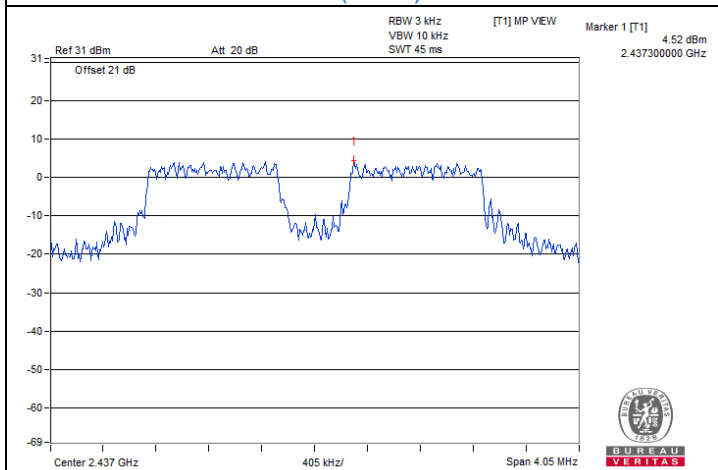


802.11ax (HE) 26-tone RU : CH 6

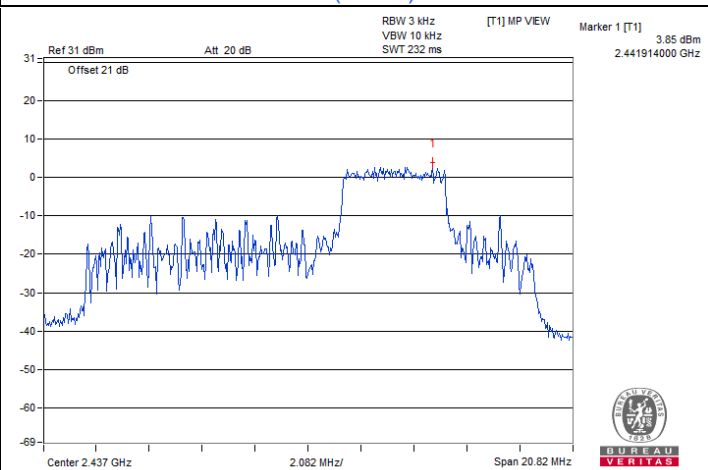

802.11ax (HE) 52-tone RU : CH 6



### Spectrum Plot of Maximum Value

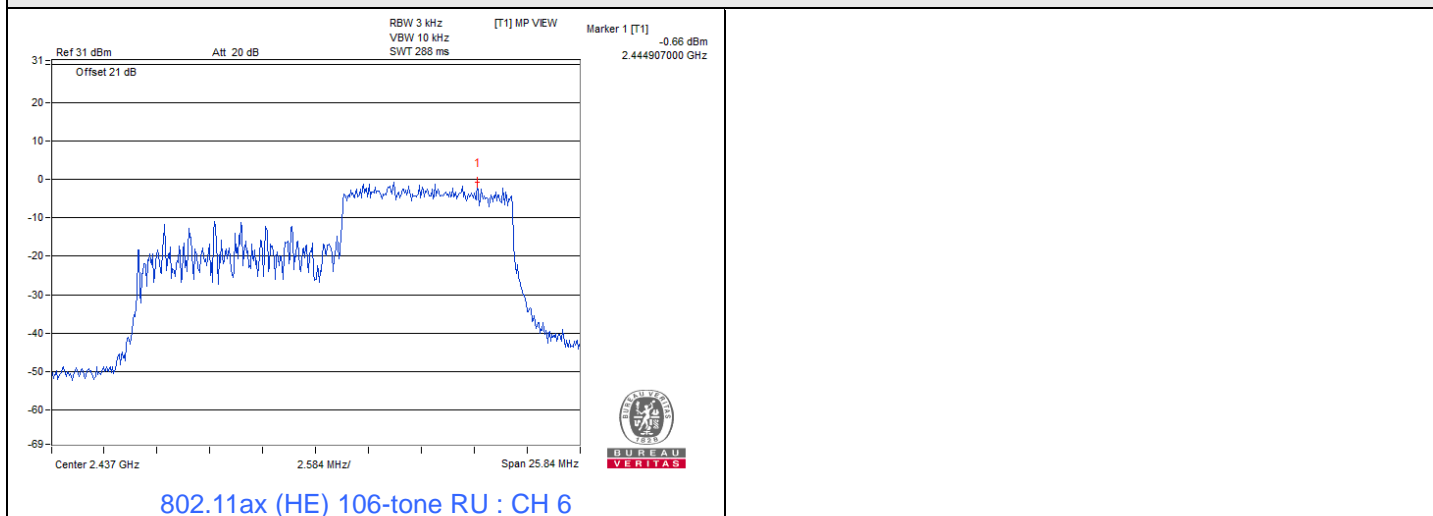

### 7.3 6 dB Bandwidth

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Katina Lu
--------------	---------	---------------------------	--------------	------------	-----------

#### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	10.15	0.5	Pass
6	2437	10.14	0.5	Pass
11	2462	10.15	0.5	Pass
12	2467	10.14	0.5	Pass
13	2472	10.15	0.5	Pass

#### 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	15.15	0.5	Pass
6	2437	15.15	0.5	Pass
11	2462	15.15	0.5	Pass
12	2467	15.14	0.5	Pass
13	2472	15.14	0.5	Pass

#### 802.11ax (HE20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	15.17	0.5	Pass
6	2437	15.17	0.5	Pass
11	2462	15.15	0.5	Pass
12	2467	15.17	0.5	Pass
13	2472	15.12	0.5	Pass

#### 802.11ax (HE40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
3	2422	35.12	0.5	Pass
6	2437	35.13	0.5	Pass
9	2452	35.13	0.5	Pass
10	2457	35.21	0.5	Pass
11	2462	35.2	0.5	Pass



### 802.11ax (HE) 26-tone RU

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	14.58	0.5	Pass
6	2437	2.7	0.5	Pass
11	2462	15.82	0.5	Pass
12	2467	15.82	0.5	Pass
13	2472	15.82	0.5	Pass


### 802.11ax (HE) 52-tone RU

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	17.05	0.5	Pass
6	2437	13.88	0.5	Pass
11	2462	17.05	0.5	Pass
12	2467	17.05	0.5	Pass
13	2472	17.04	0.5	Pass

### 802.11ax (HE) 106-tone RU


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	17.18	0.5	Pass
6	2437	17.23	0.5	Pass
11	2462	17.22	0.5	Pass
12	2467	17.22	0.5	Pass
13	2472	17.2	0.5	Pass

Spectrum Plot of Minimum Value

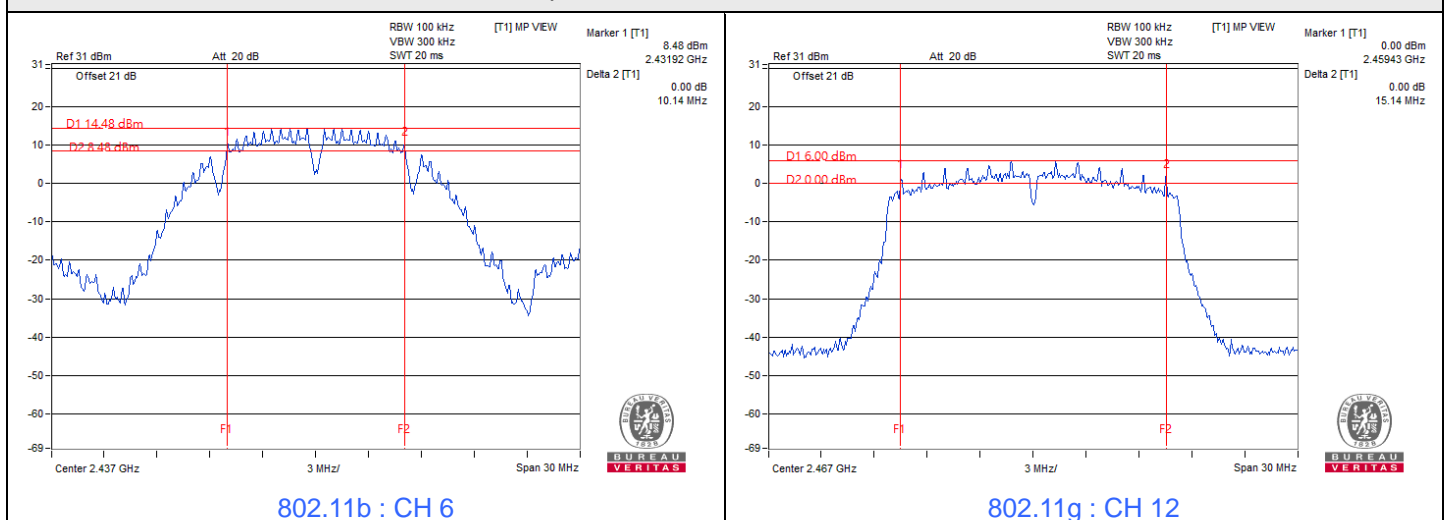





### Spectrum Plot of Minimum Value

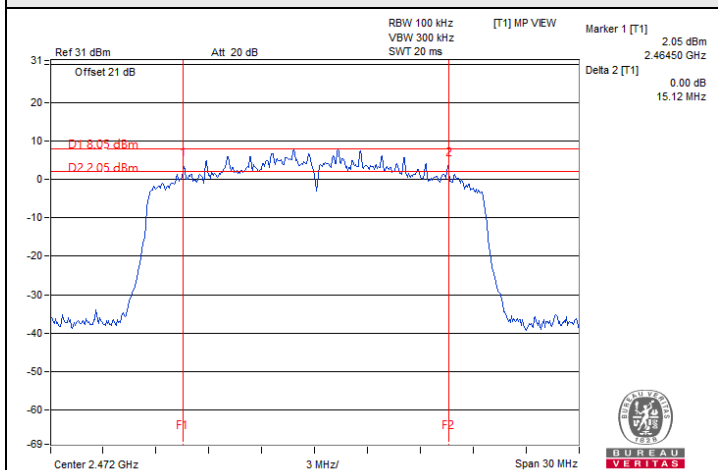


802.11ax (HE20) : CH 13

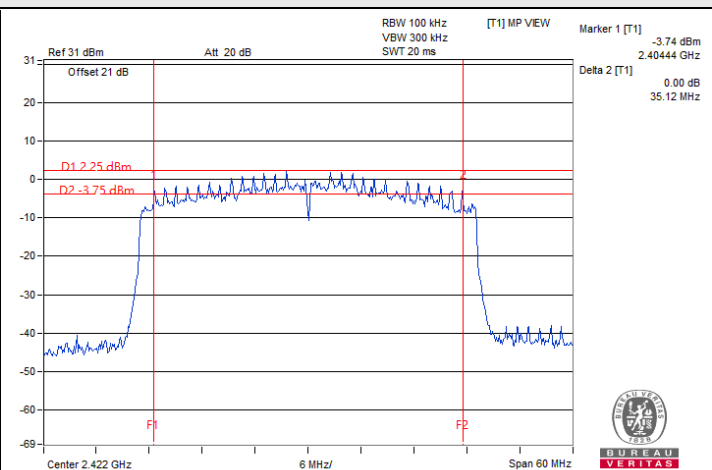


802.11ax (HE40) : CH 3

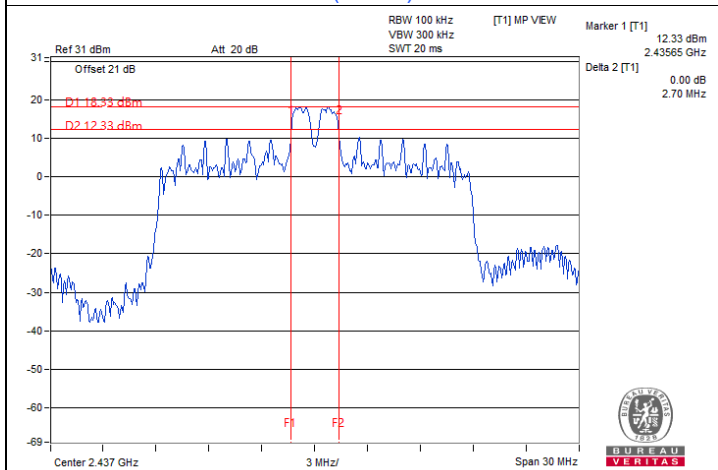

802.11ax (HE) 26-tone RU : CH 6

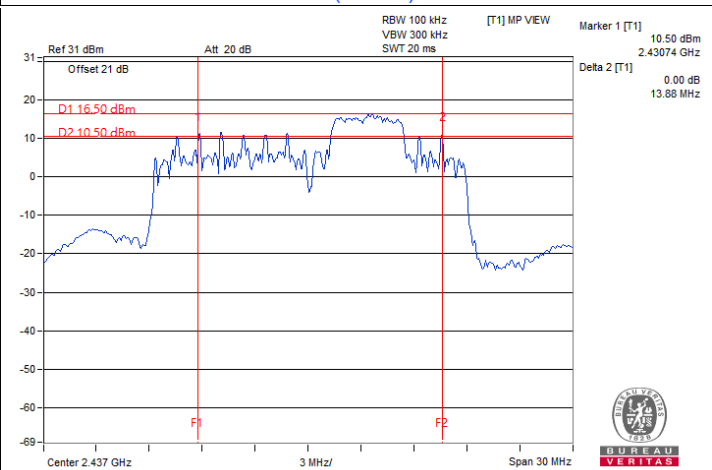

802.11ax (HE) 52-tone RU : CH 6

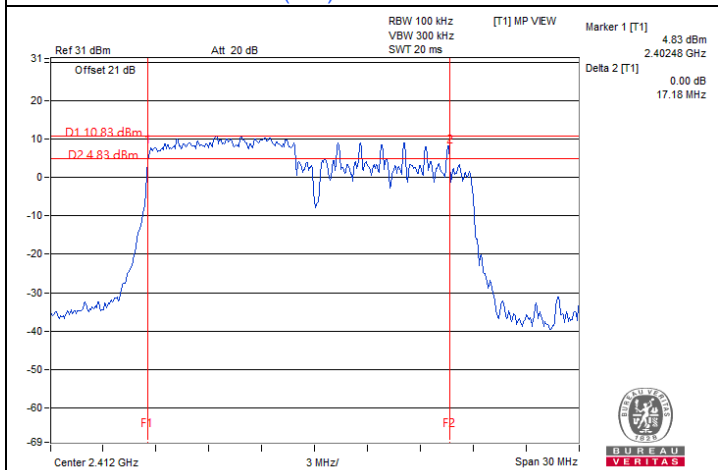








802.11ax (HE) 106-tone RU : CH 1

### 7.4 Conducted Out of Band Emissions

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Katina Lu
--------------	---------	---------------------------	--------------	------------	-----------


#### 802.11b

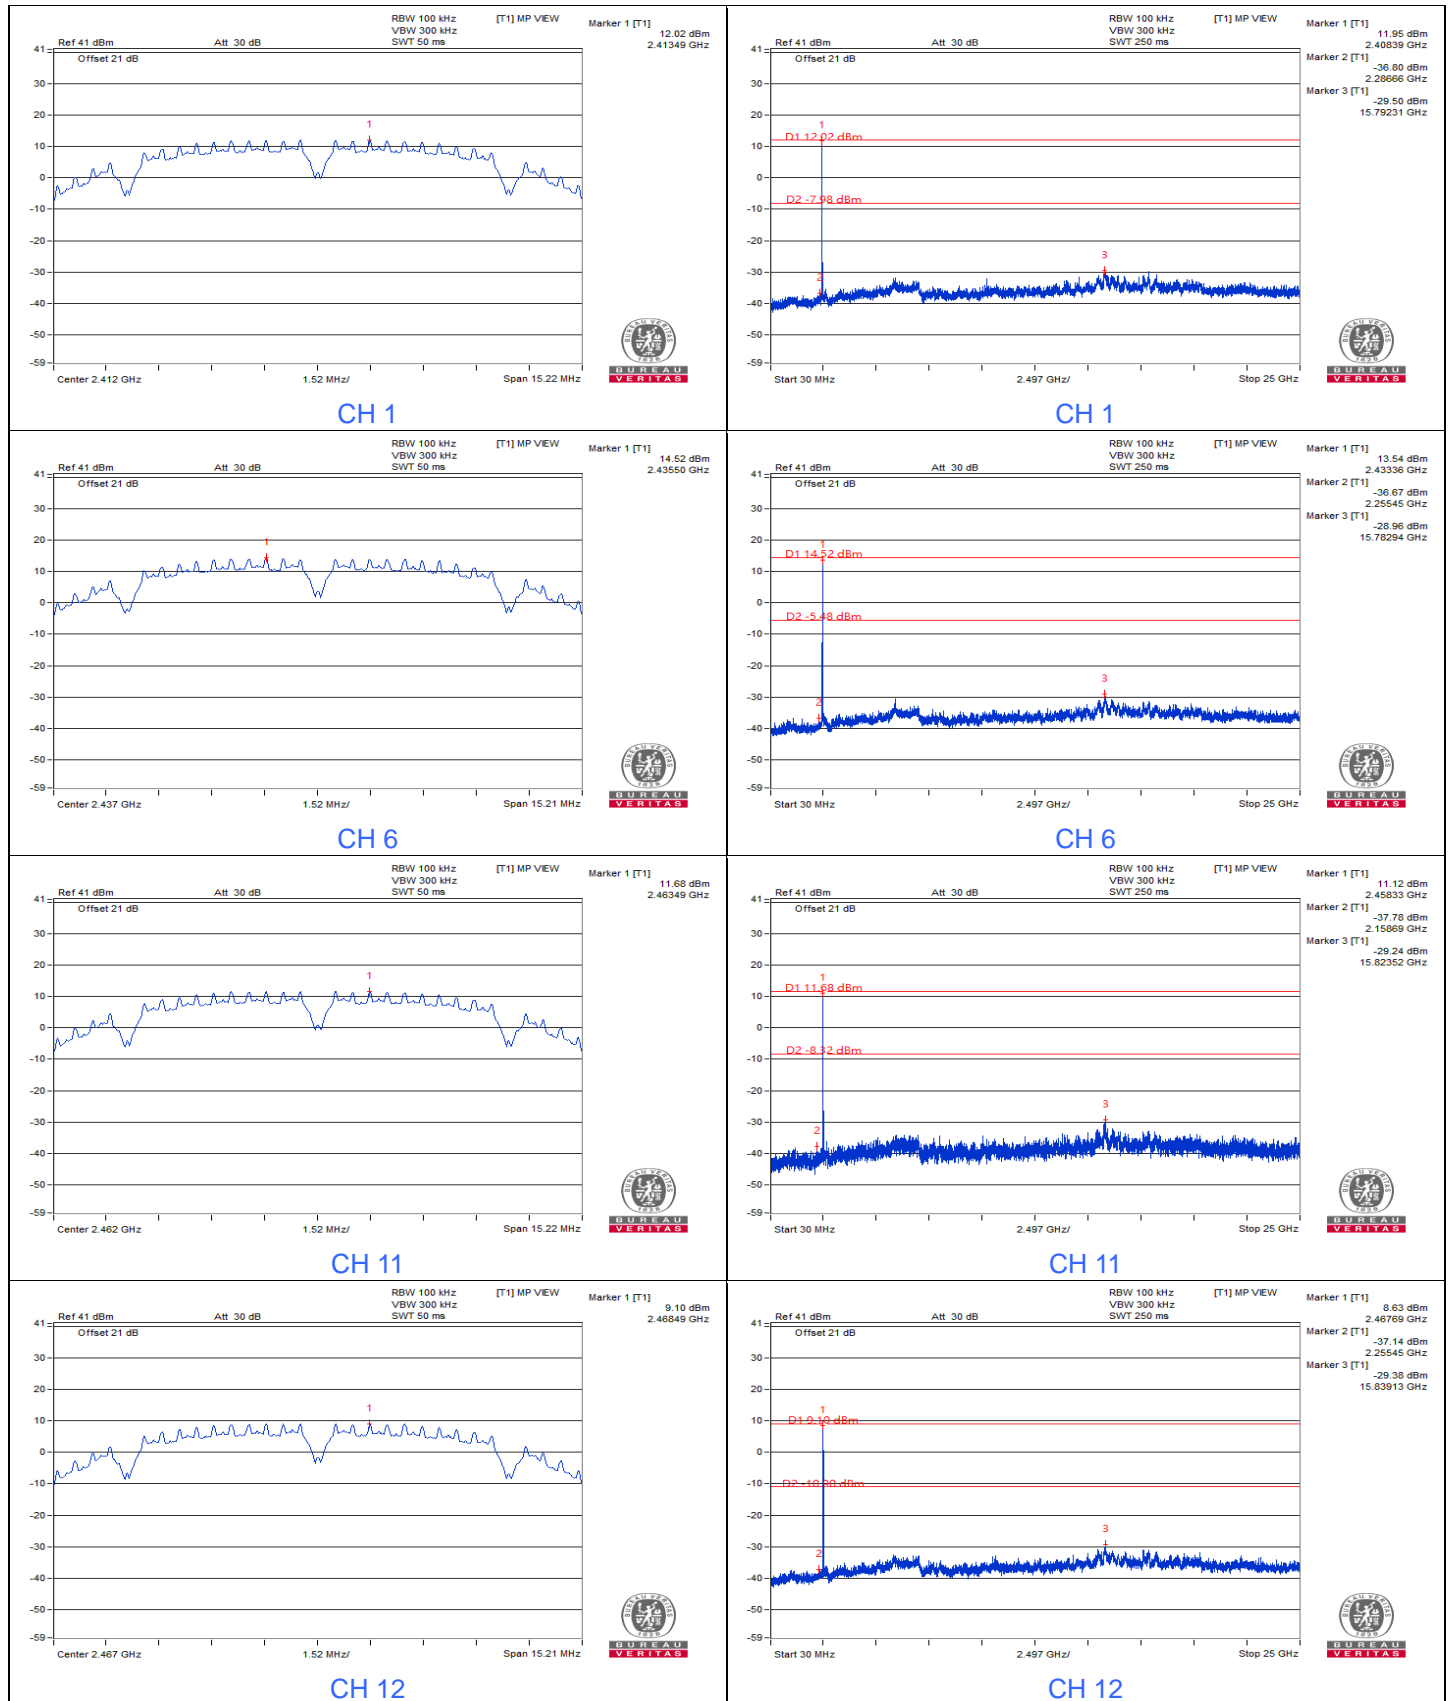


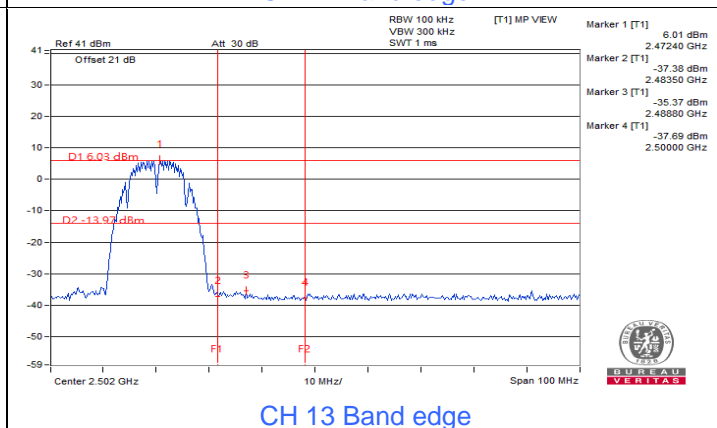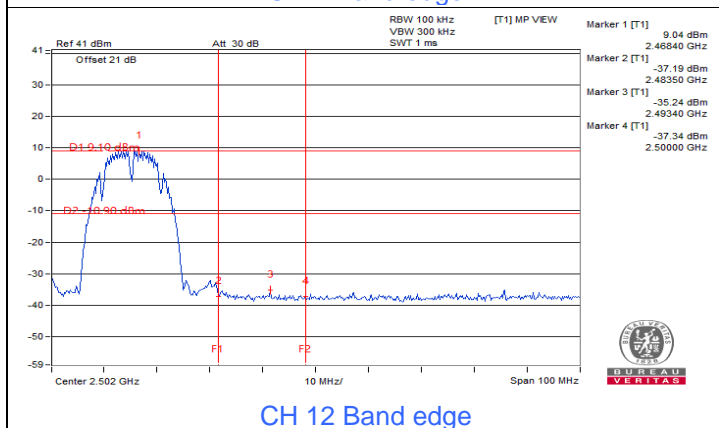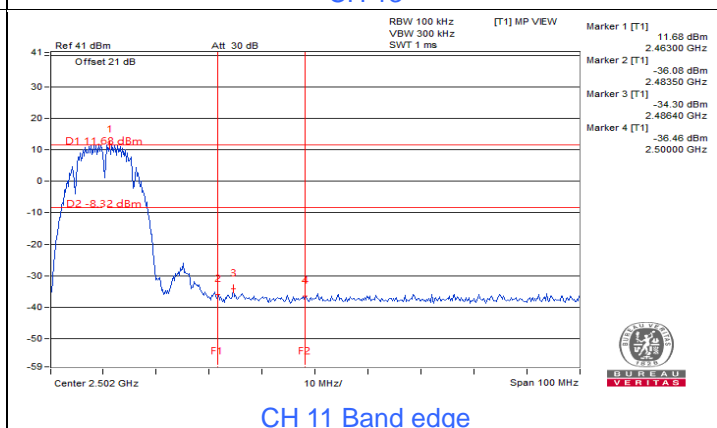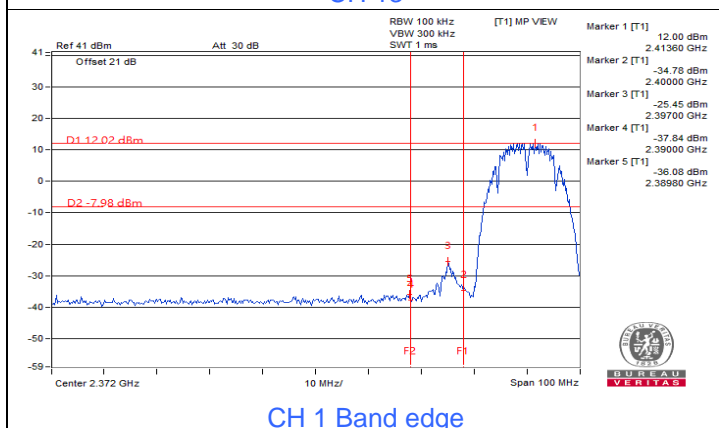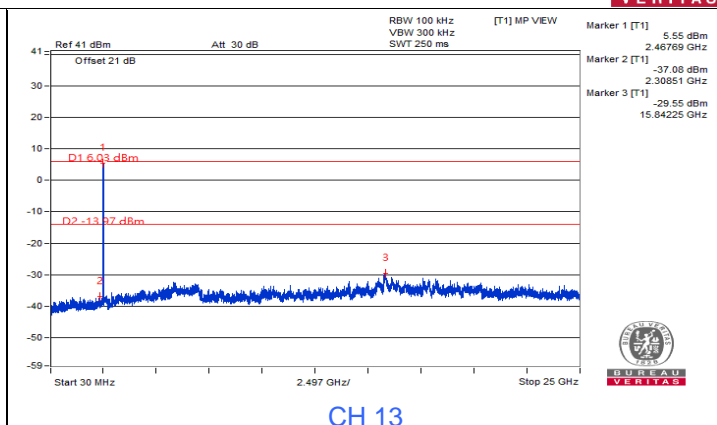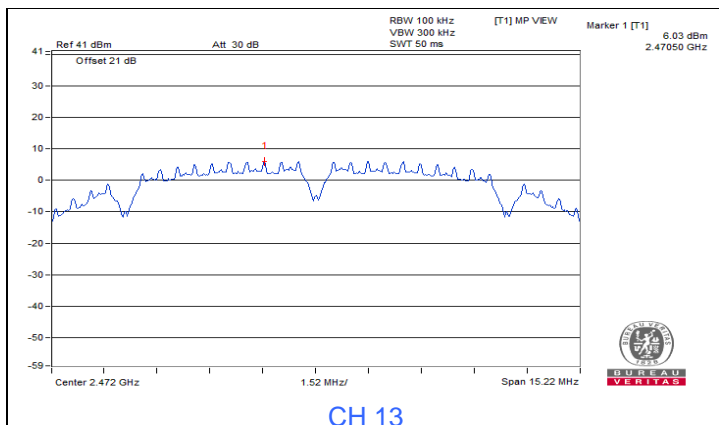




802.11g

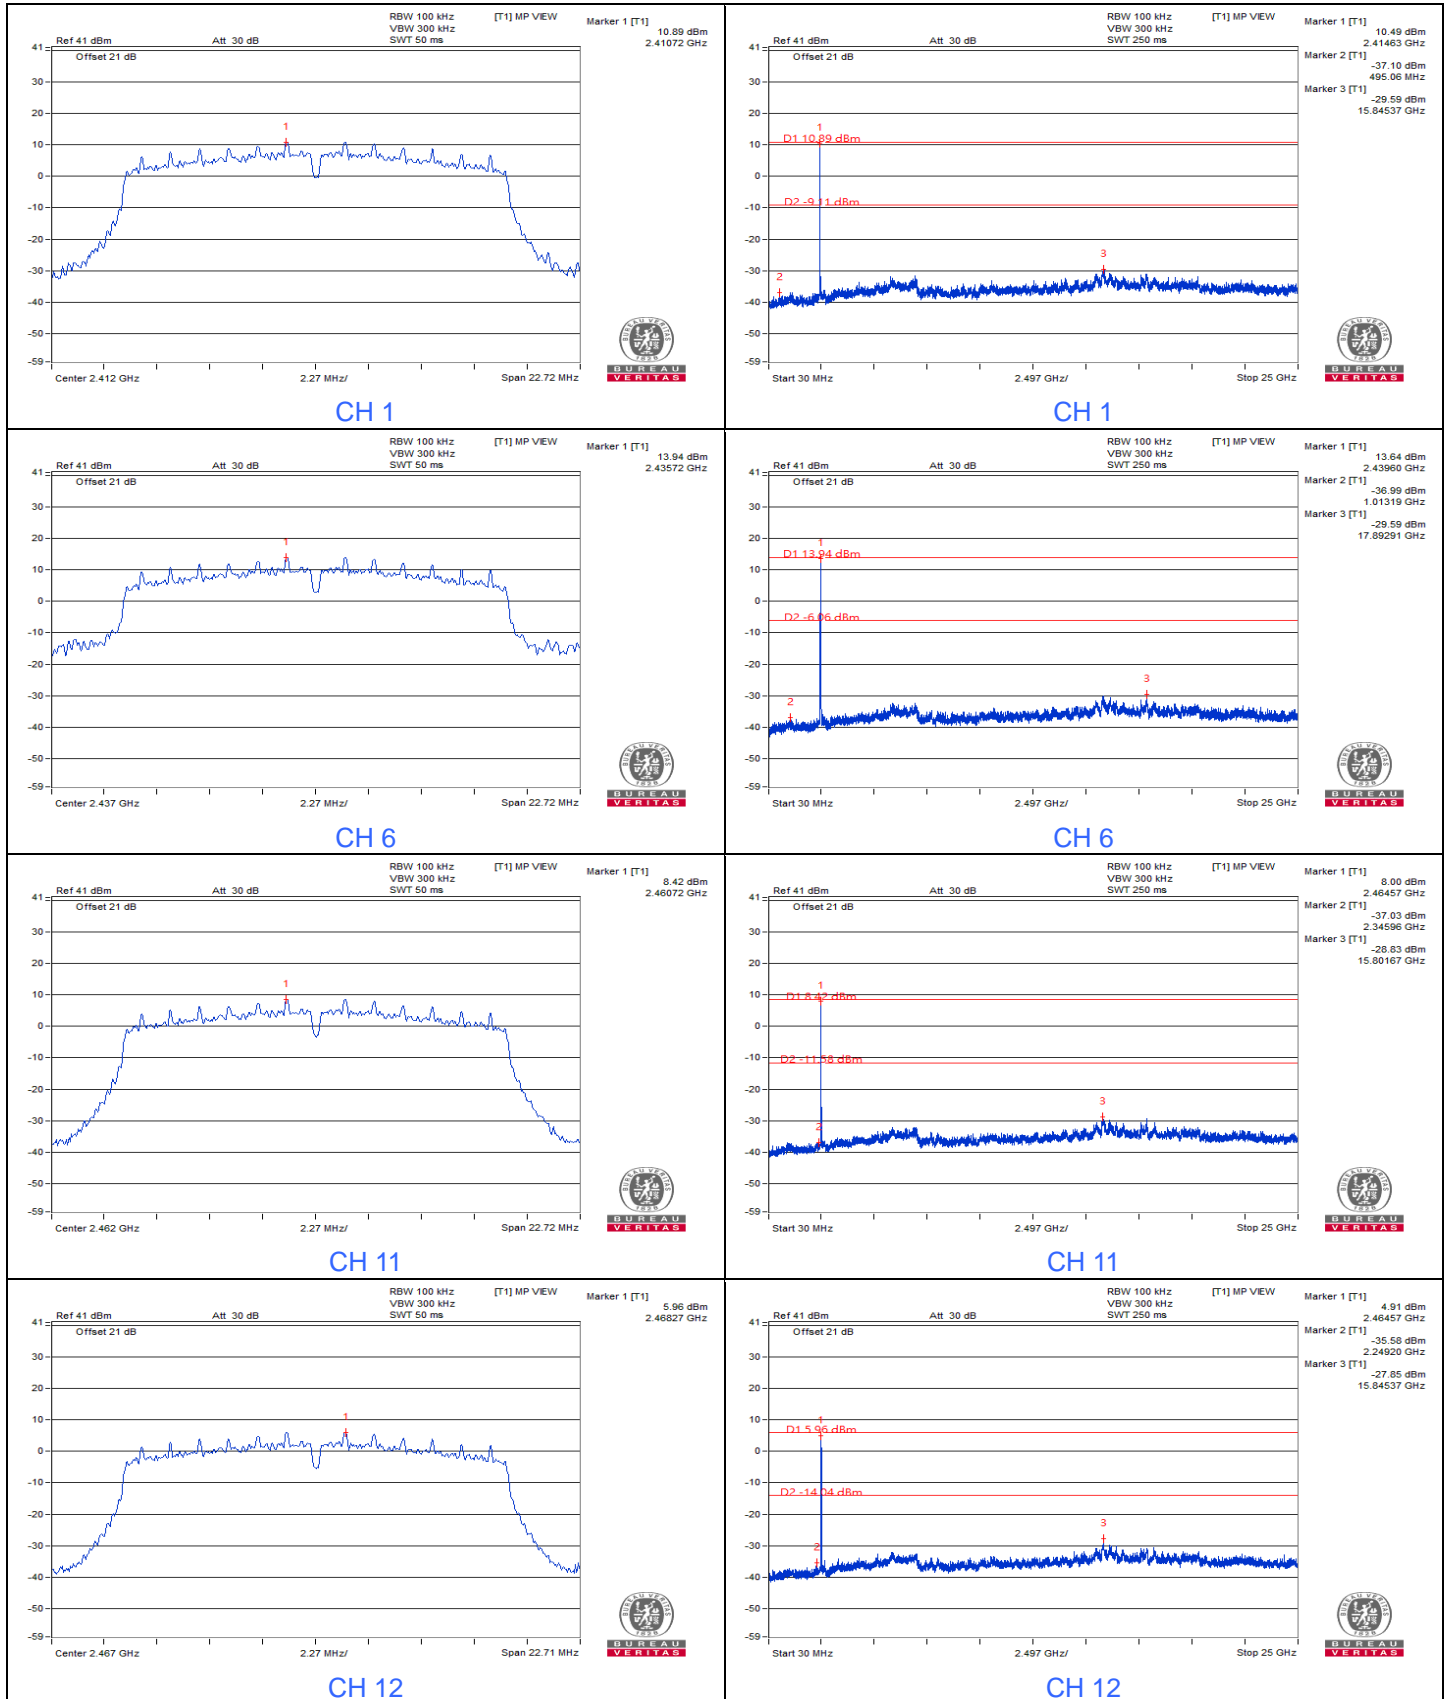


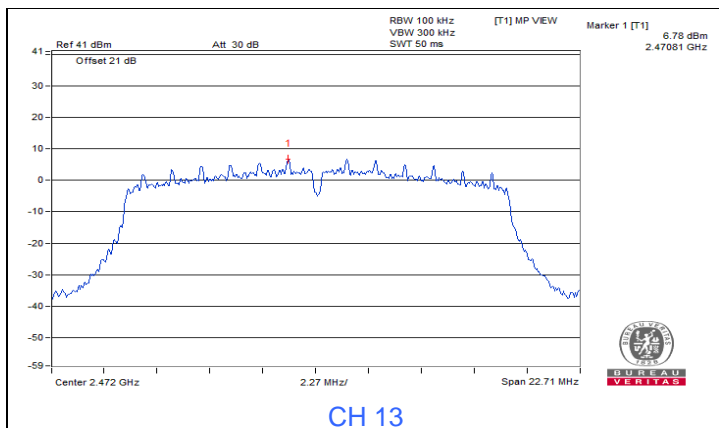


CH 13

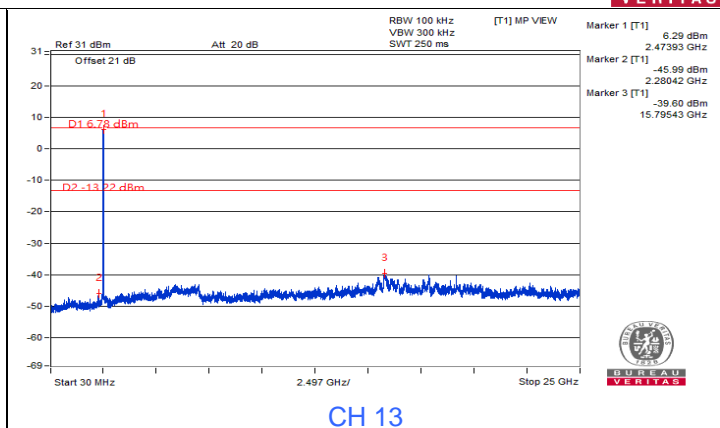


CH 13

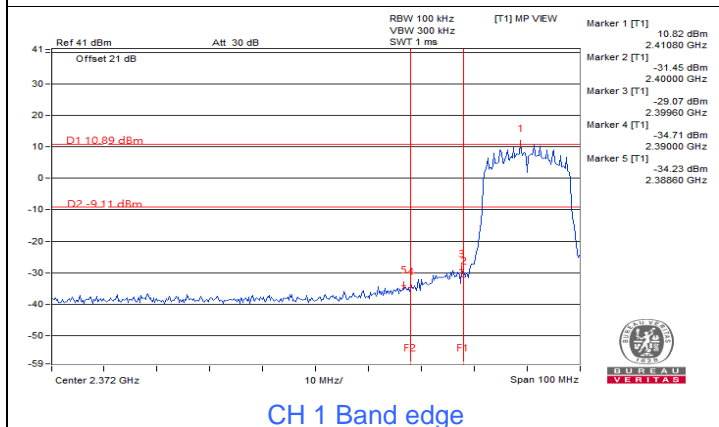


CH 1 Band edge

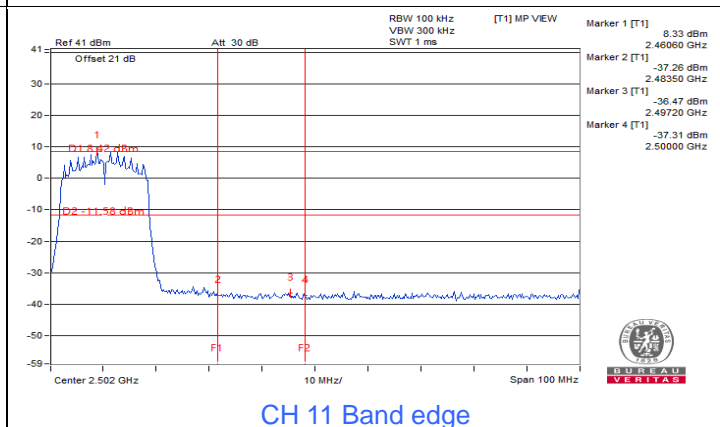

CH 11 Band edge

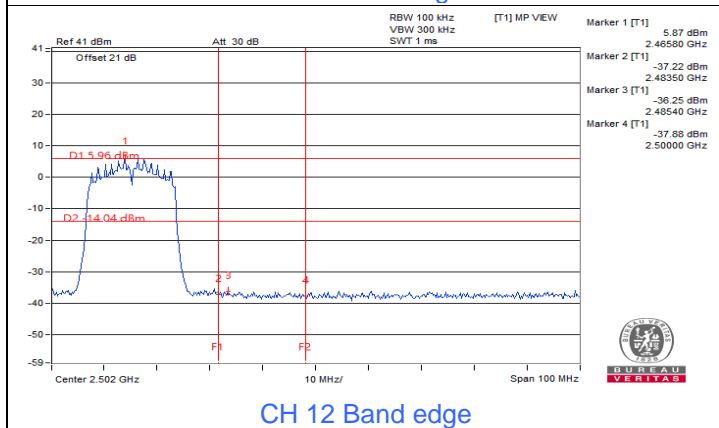


CH 12 Band edge

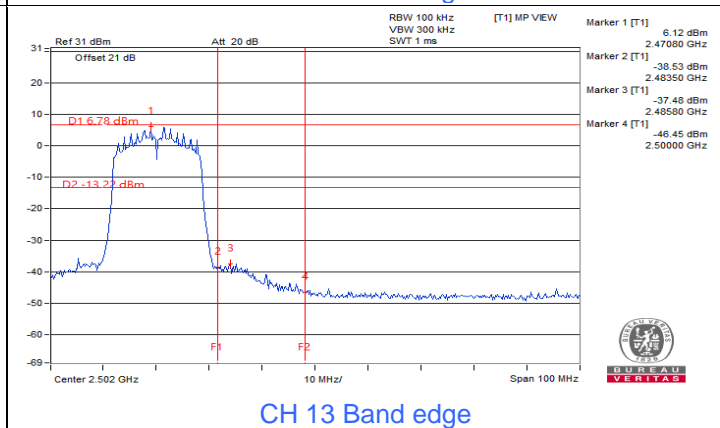


CH 13 Band edge




VHT20

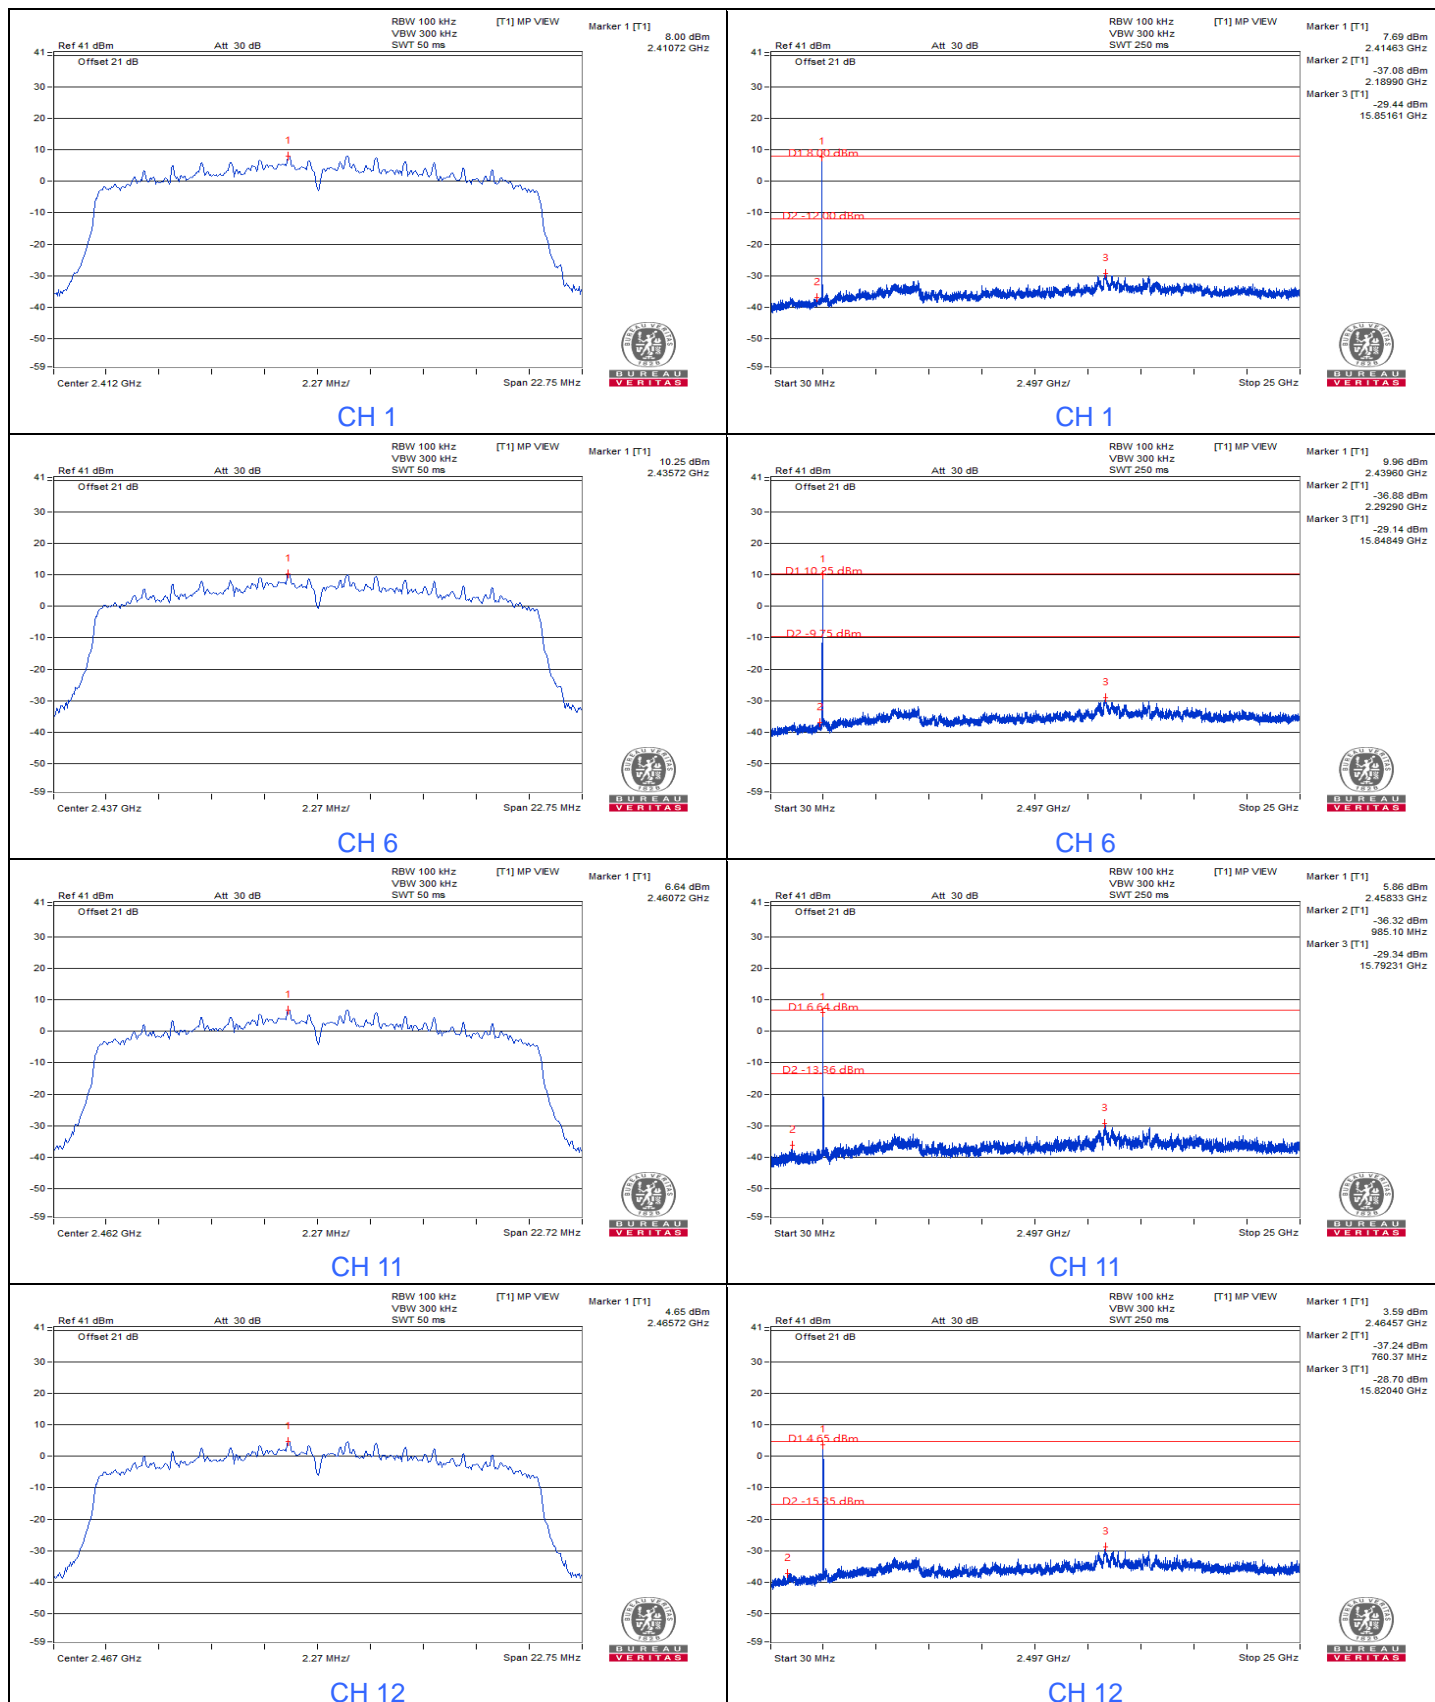


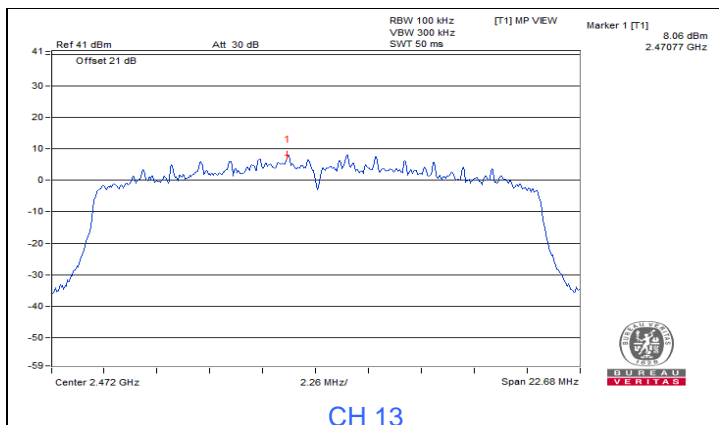


CH 13

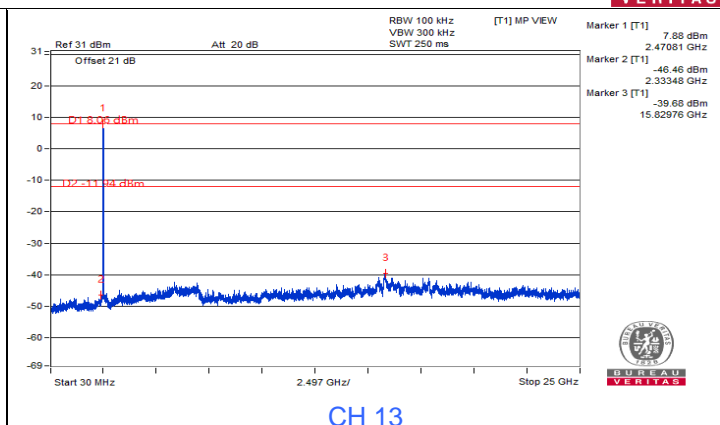


CH 13

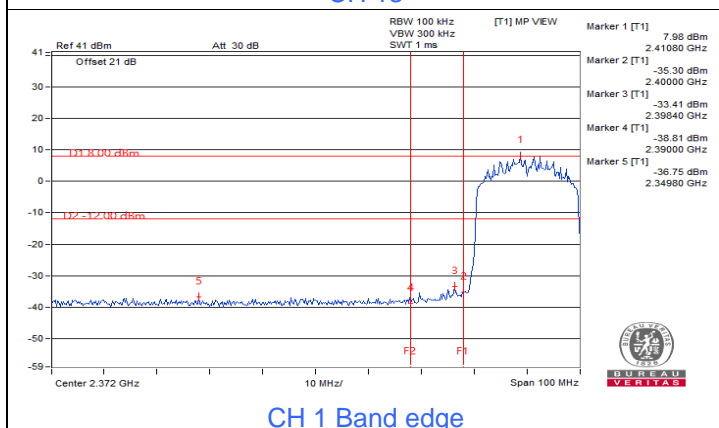


CH 1 Band edge

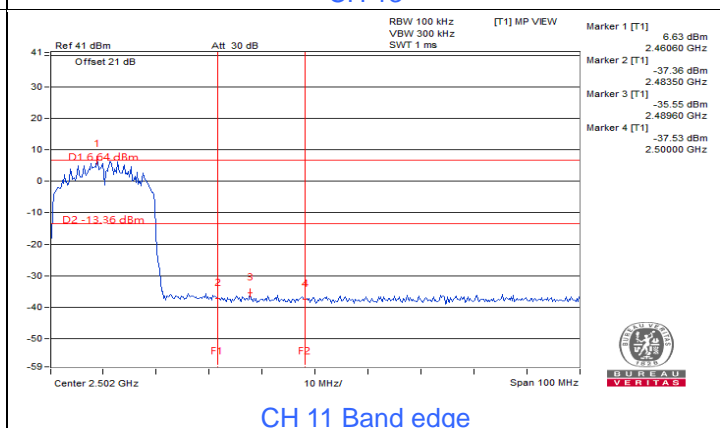

CH 11 Band edge

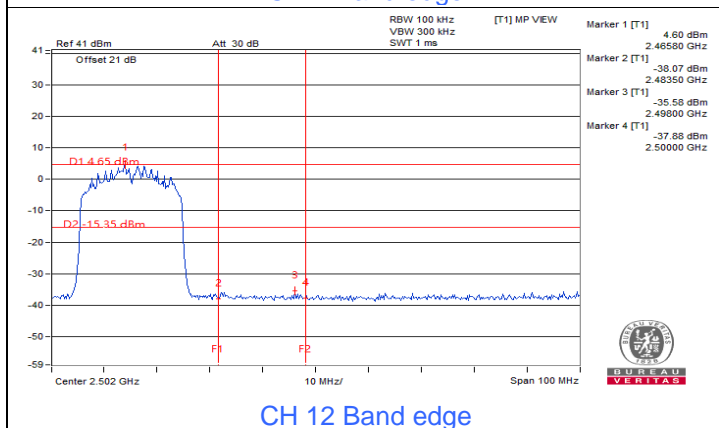

CH 12 Band edge

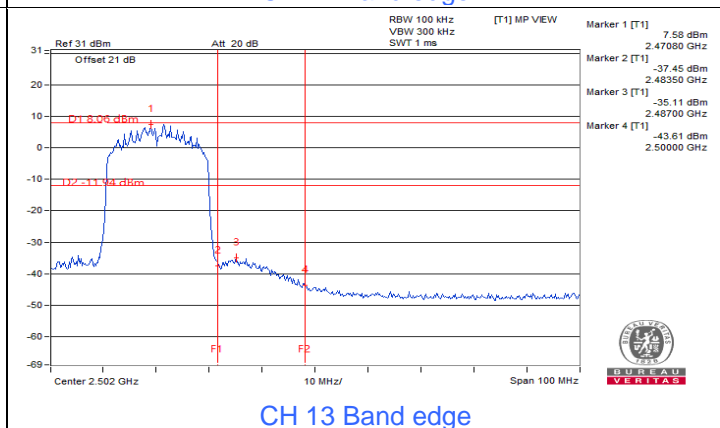







CH 13 Band edge



VHT40







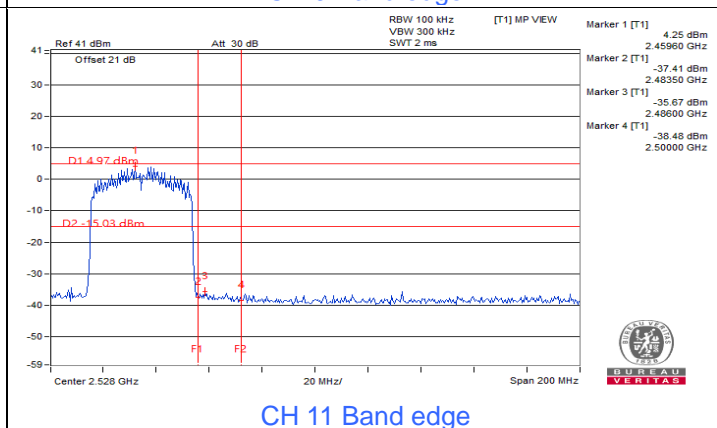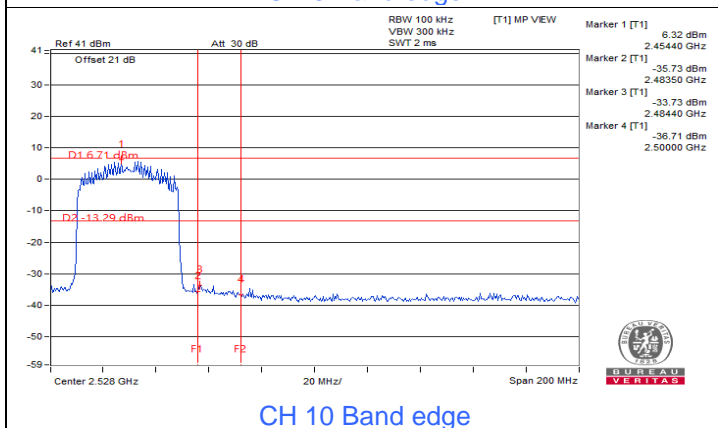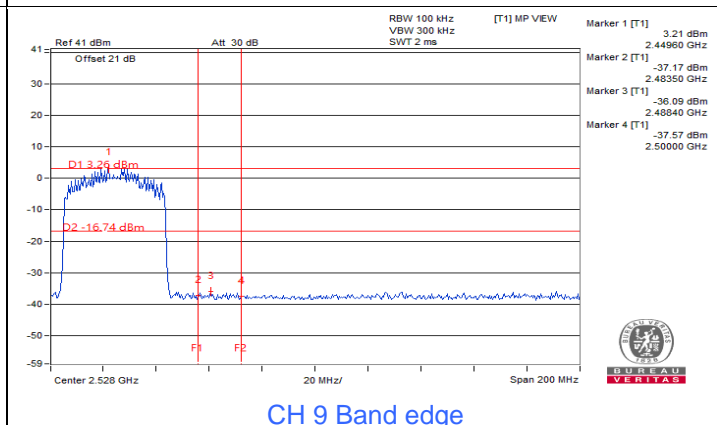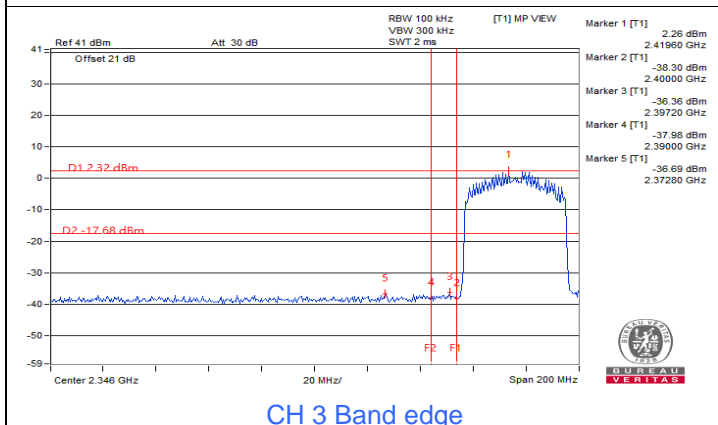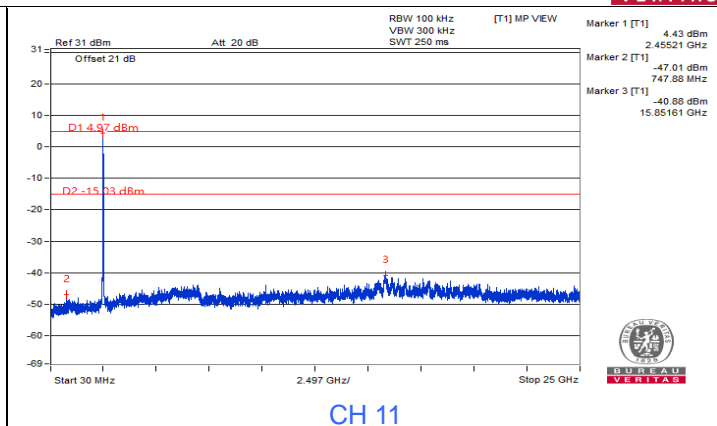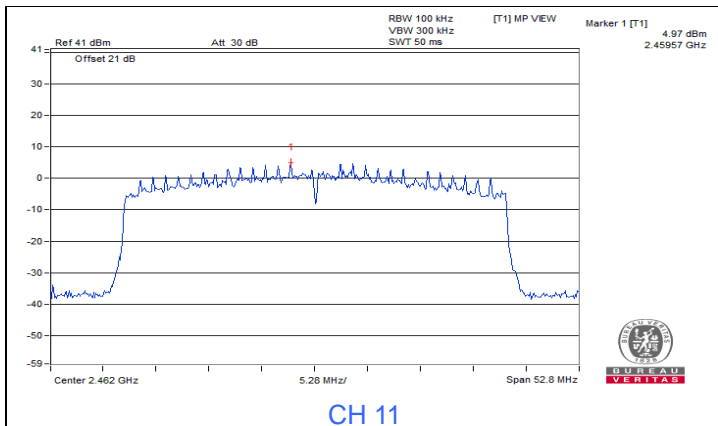




# 802.11ax (HE20)

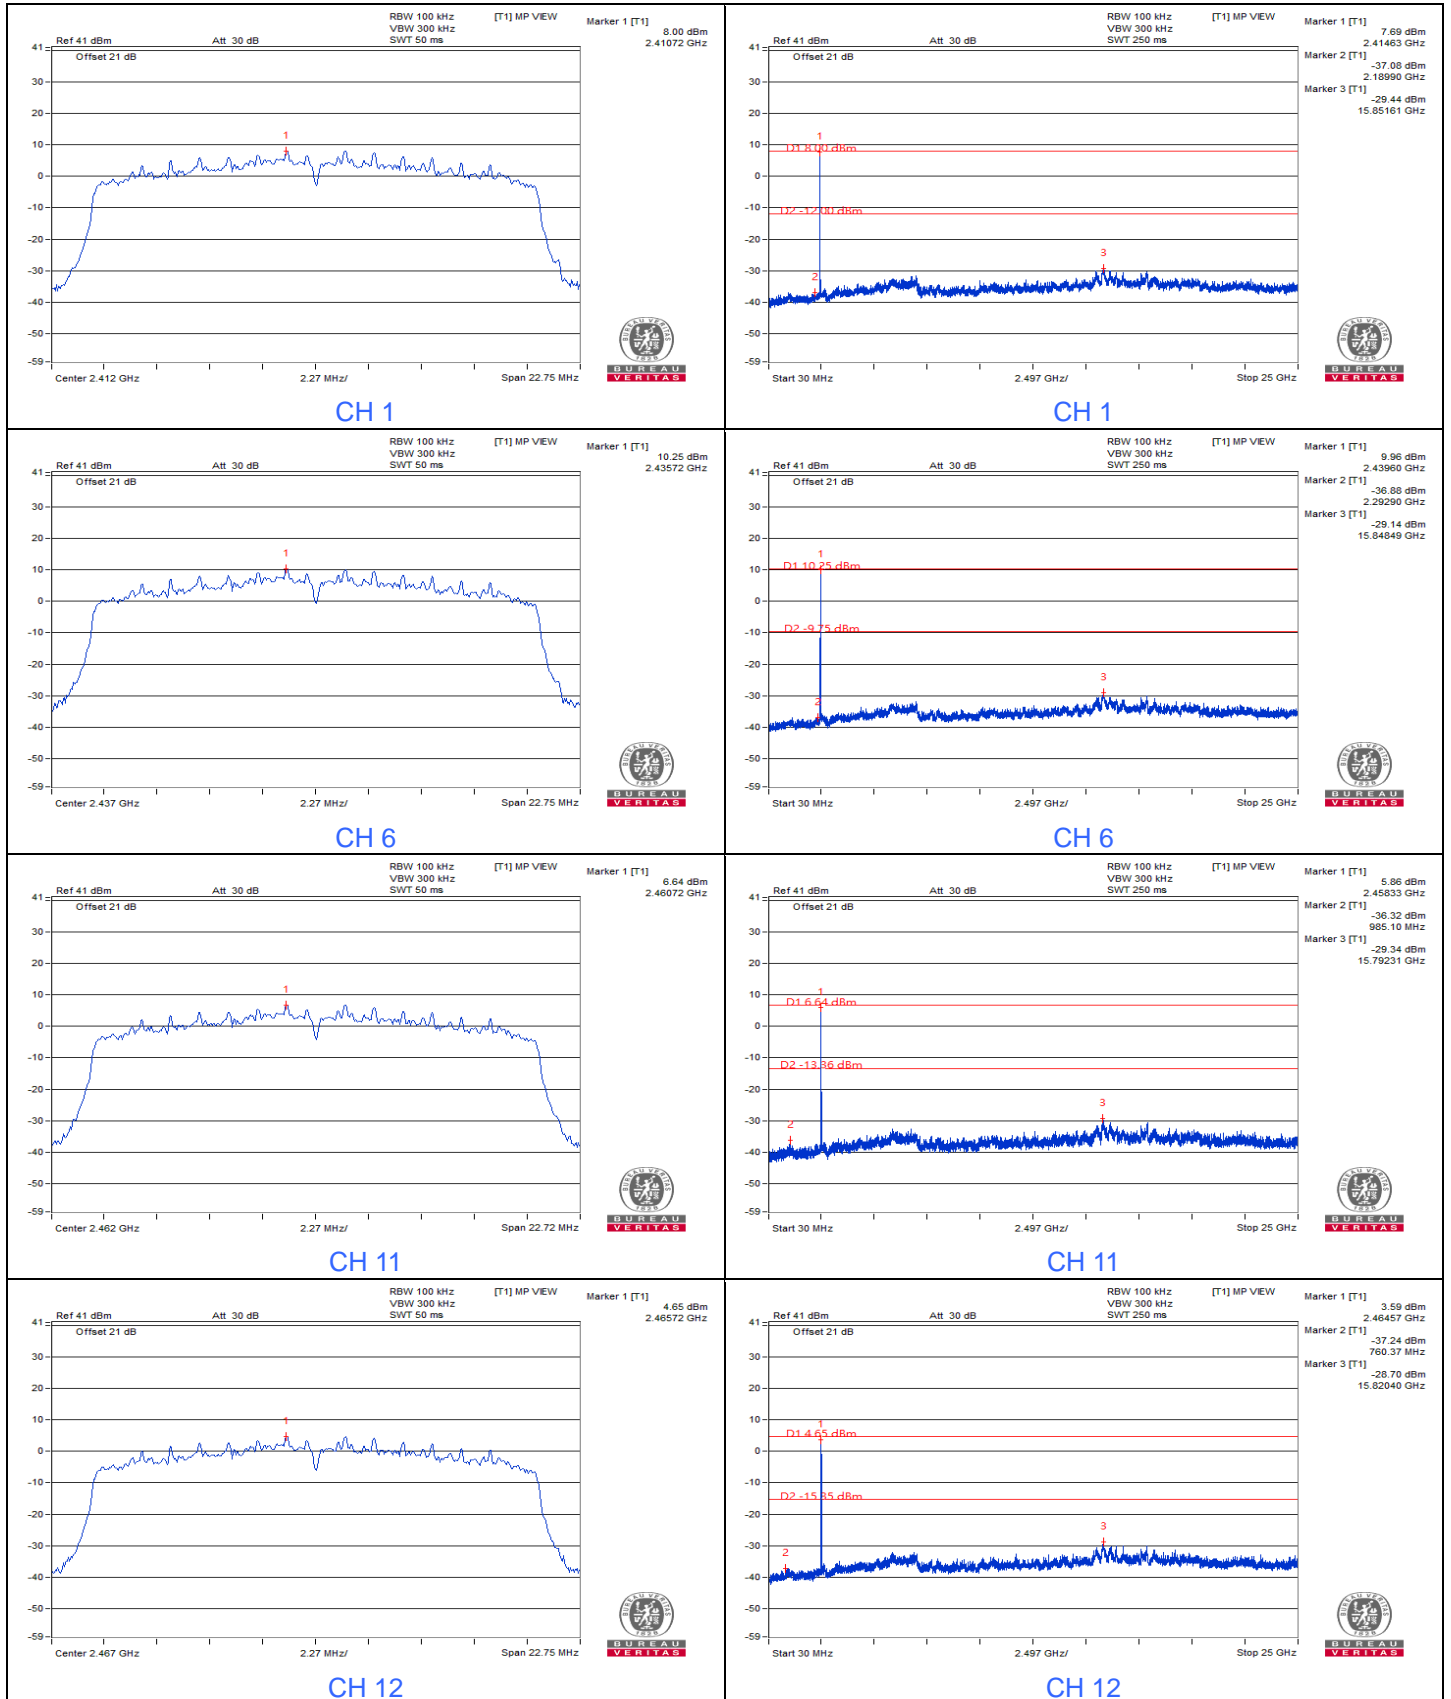


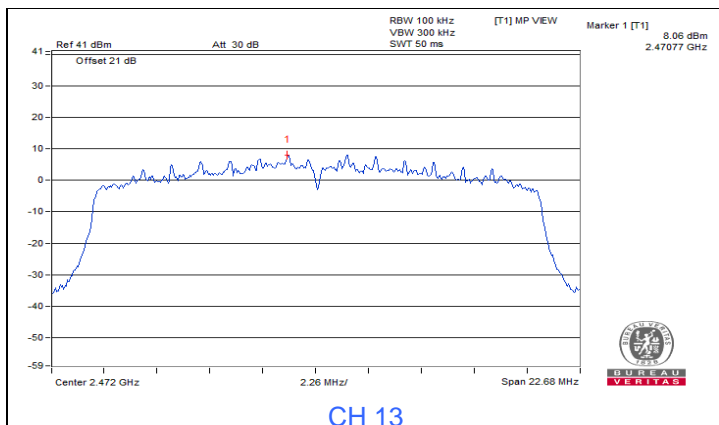


CH 13

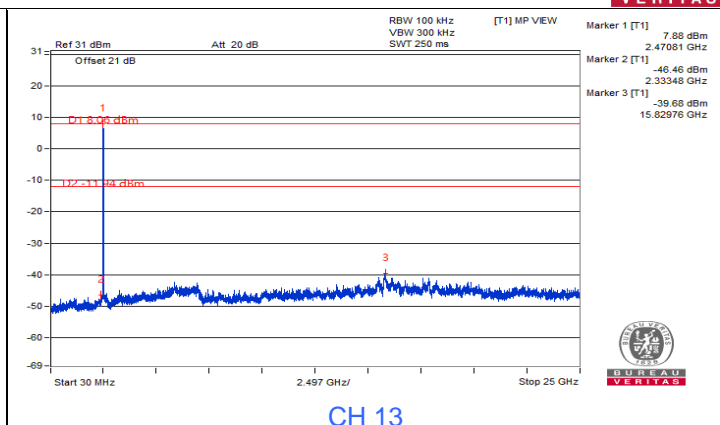


CH 13

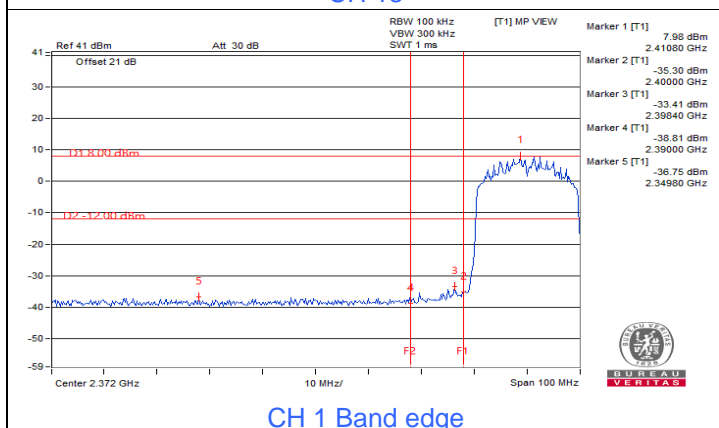


CH 1 Band edge

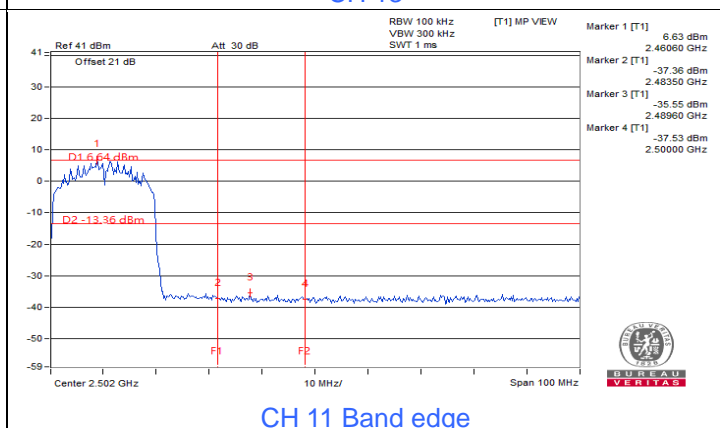

CH 11 Band edge

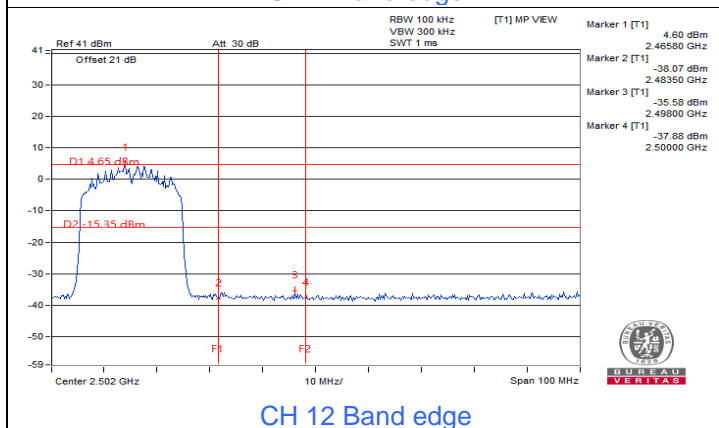


CH 12 Band edge

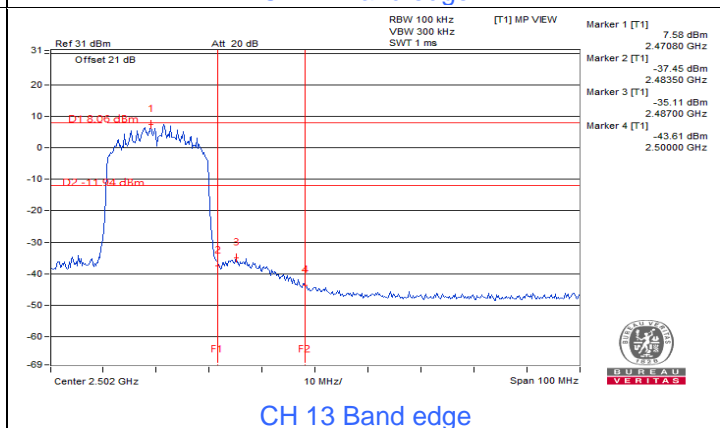


CH 13 Band edge




# 802.11ax (HE40)

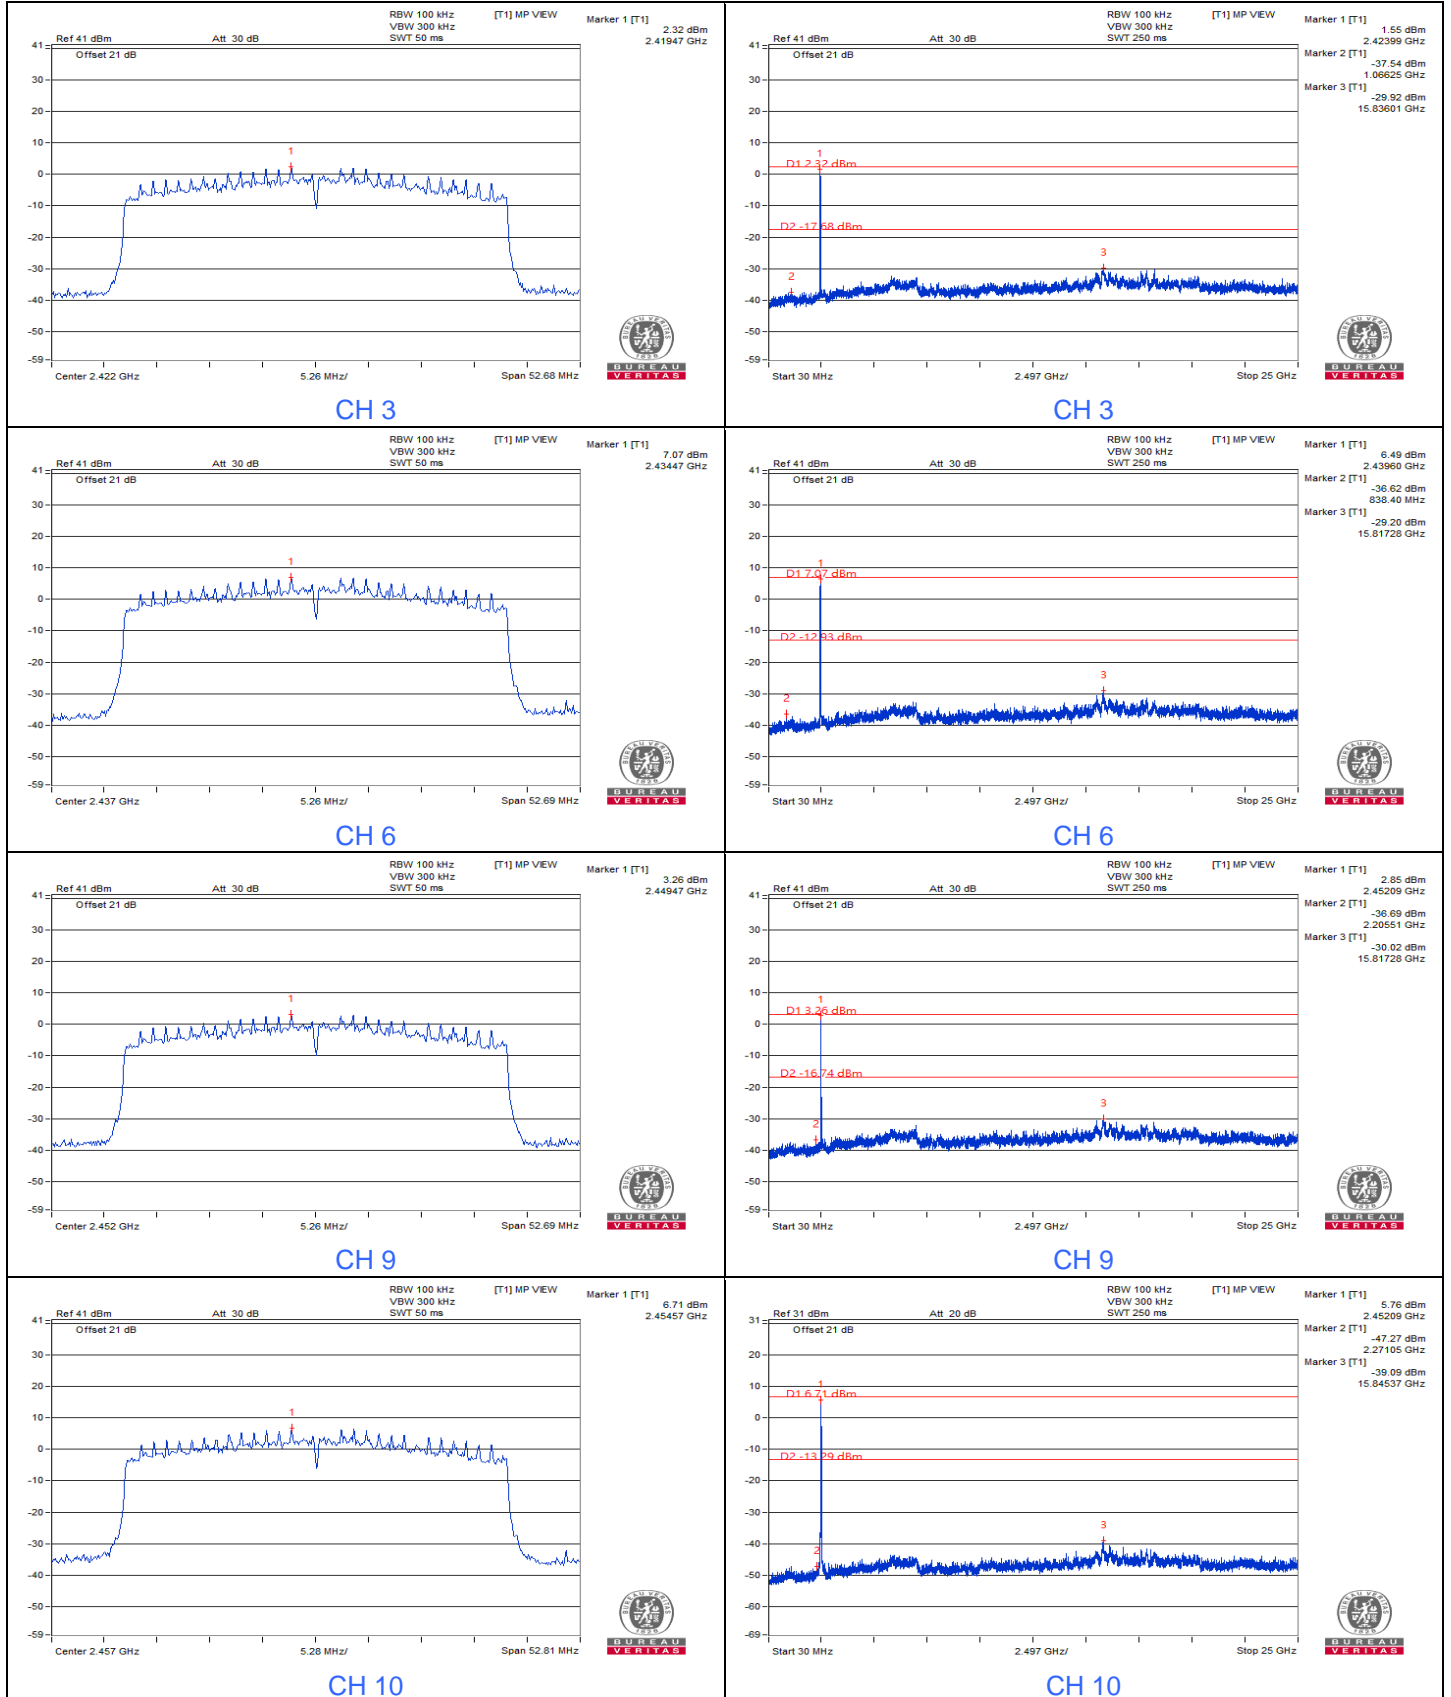


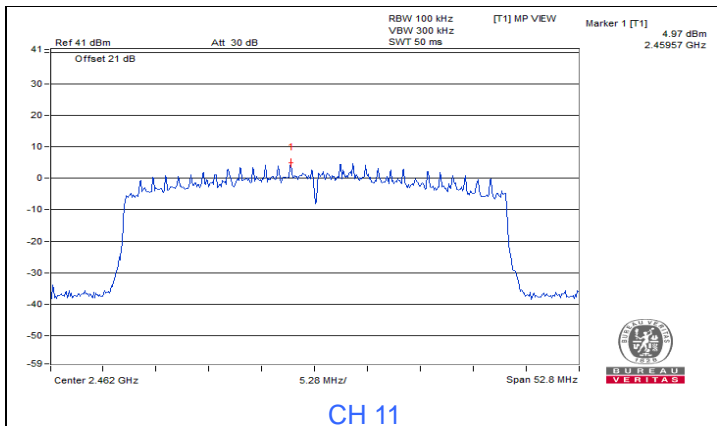


CH 11

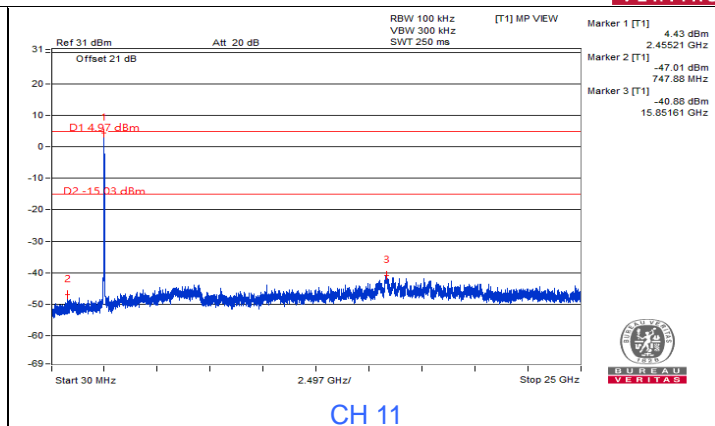


CH 11

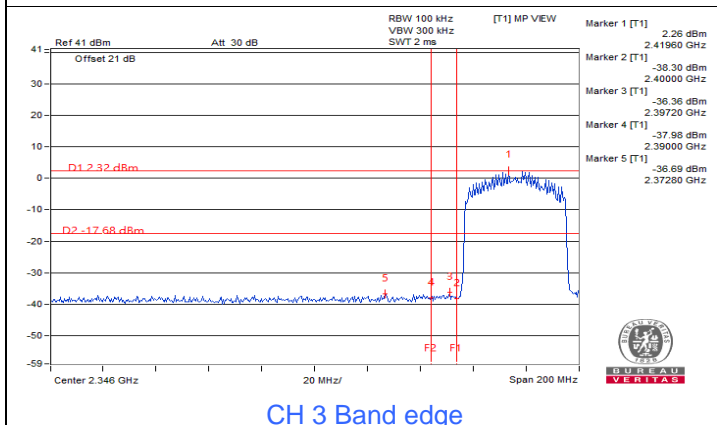


CH 3 Band edge

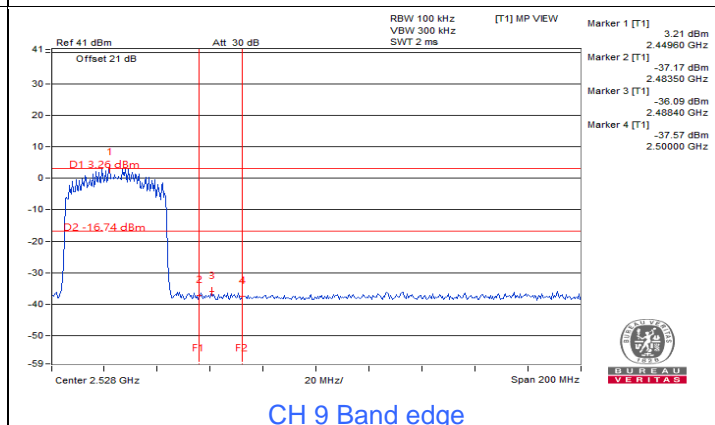

CH 9 Band edge

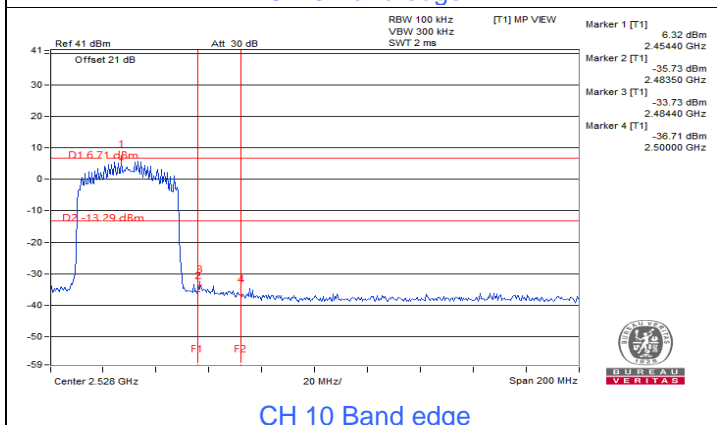

CH 10 Band edge

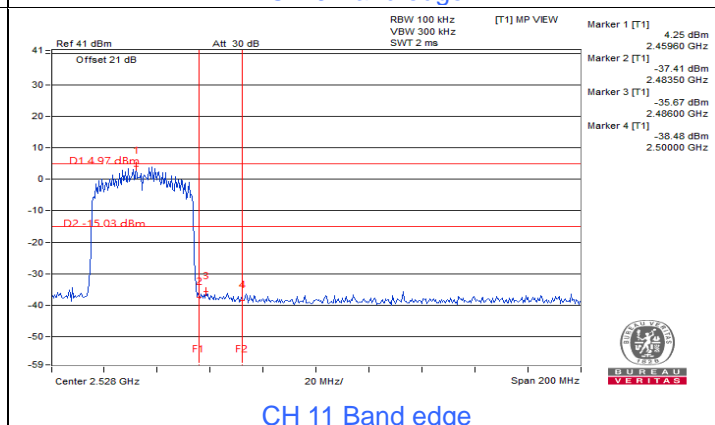








CH 11 Band edge



BUREAU VERITAS


# 802.11ax (HE) 26-tone RU

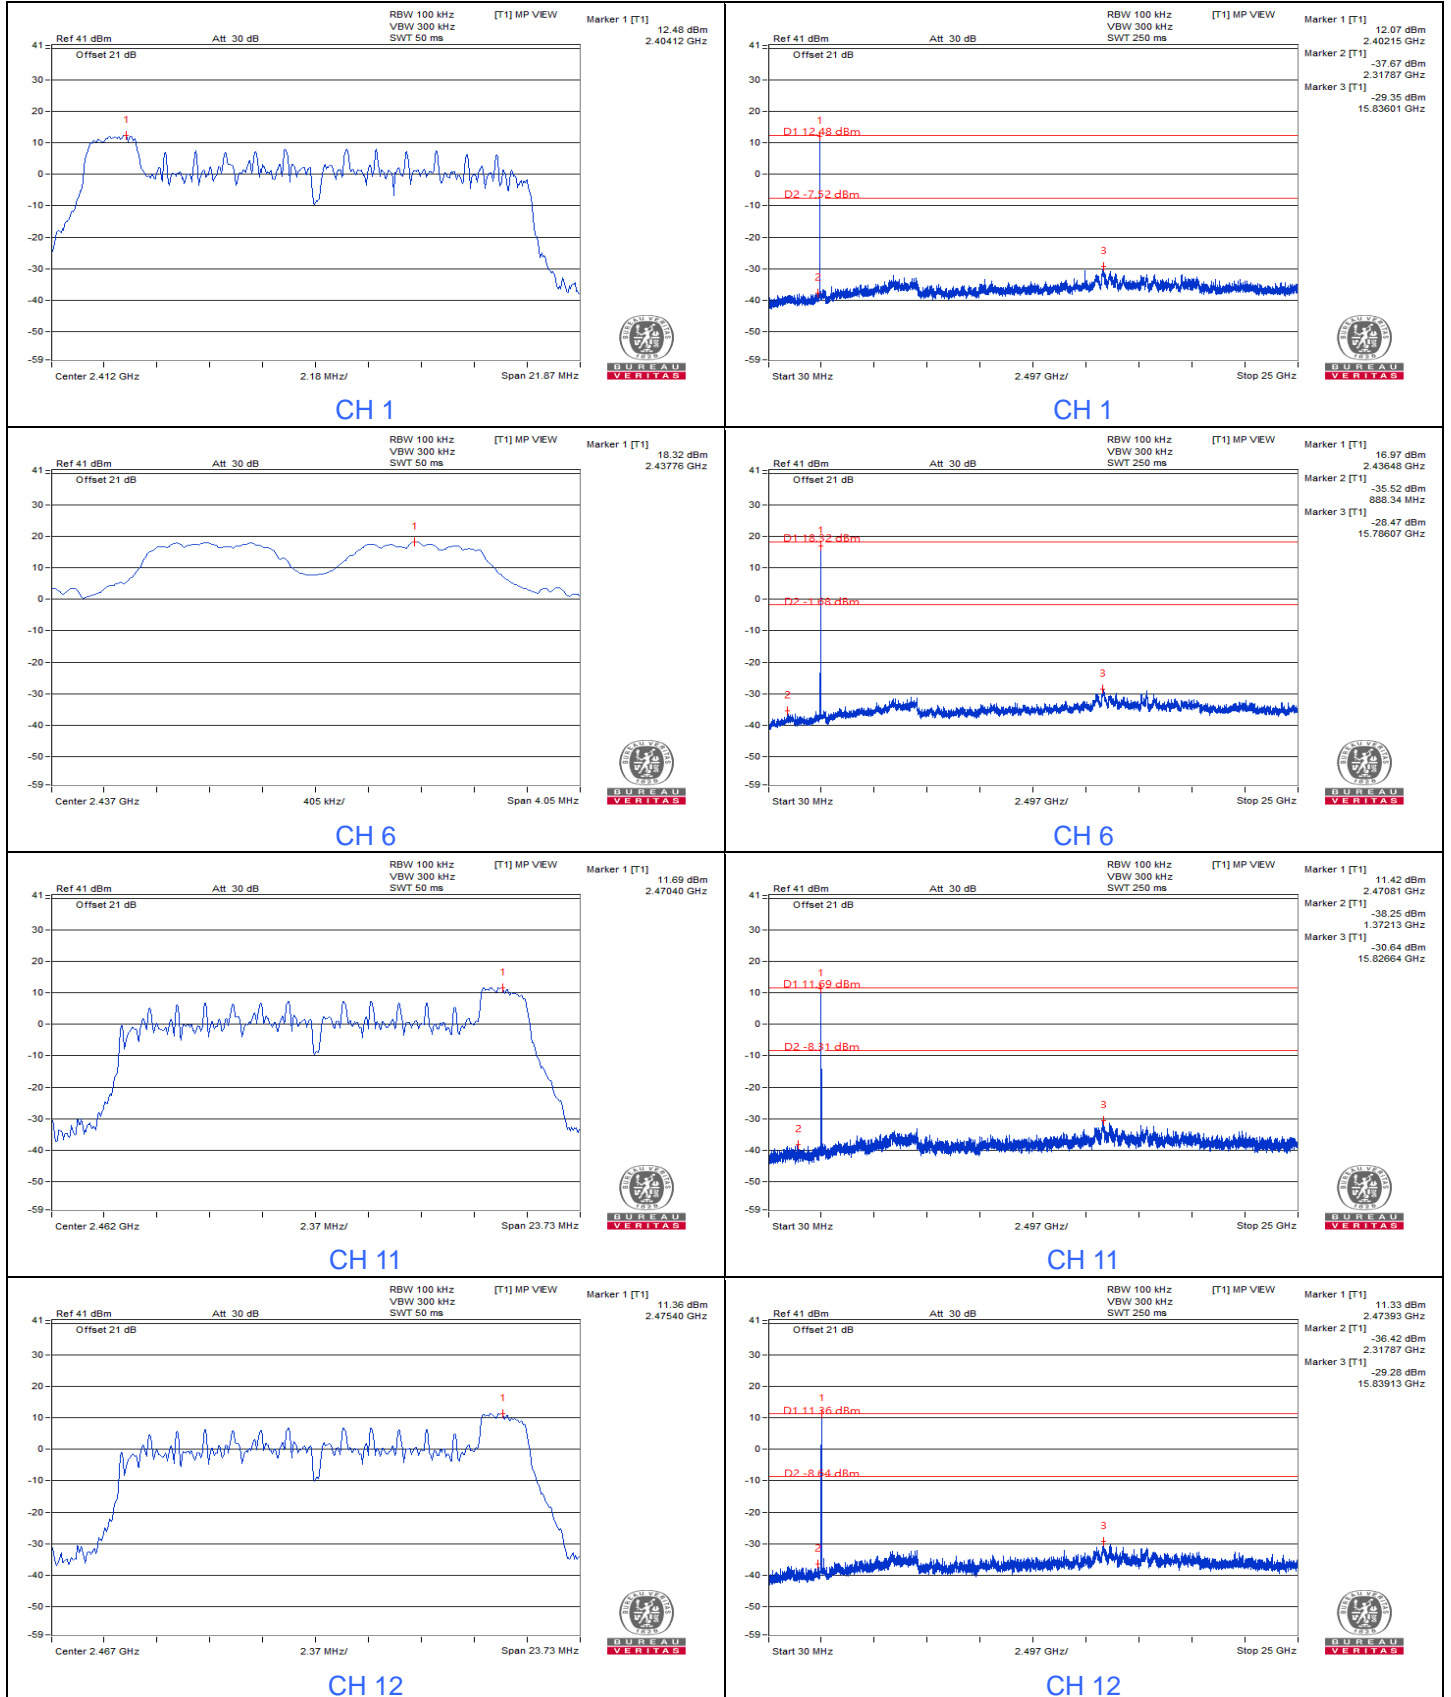

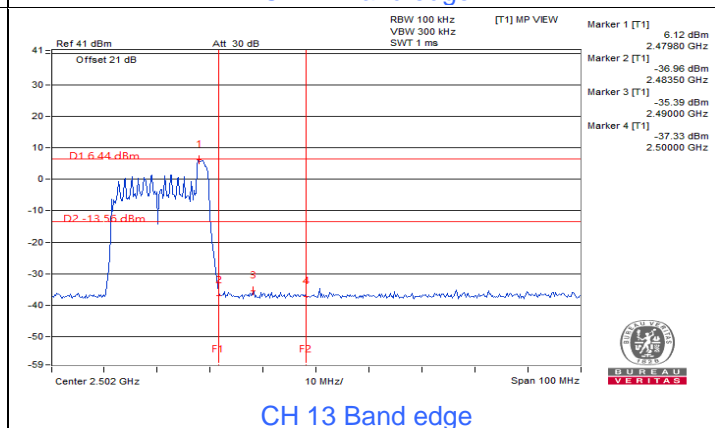
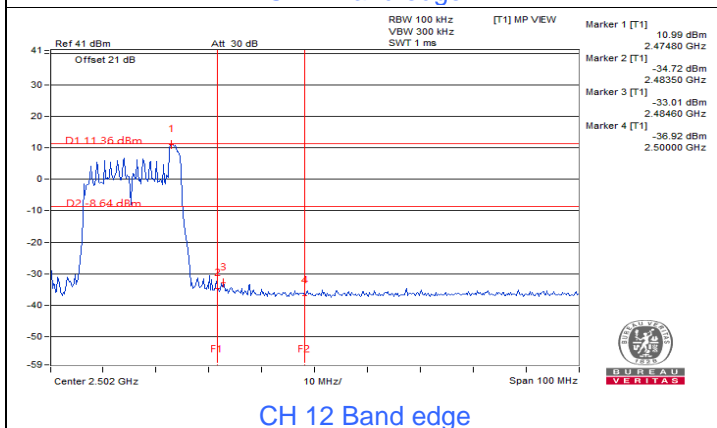
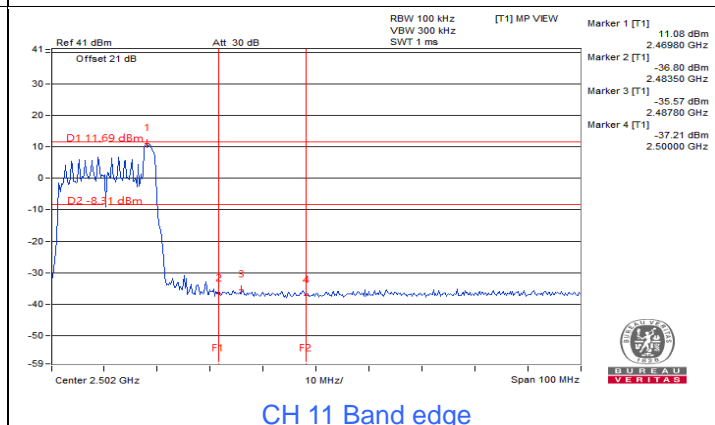
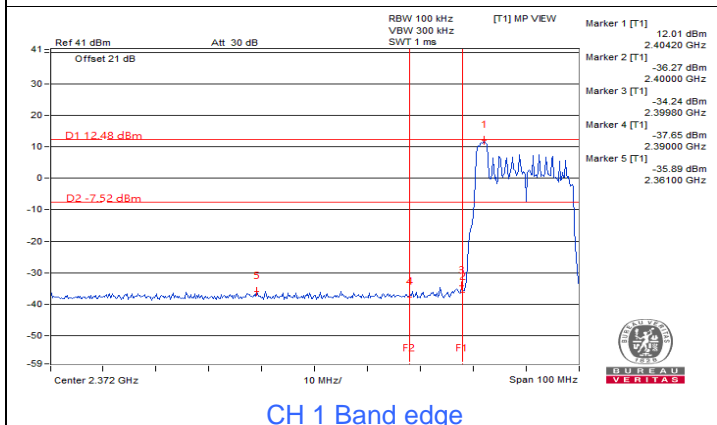
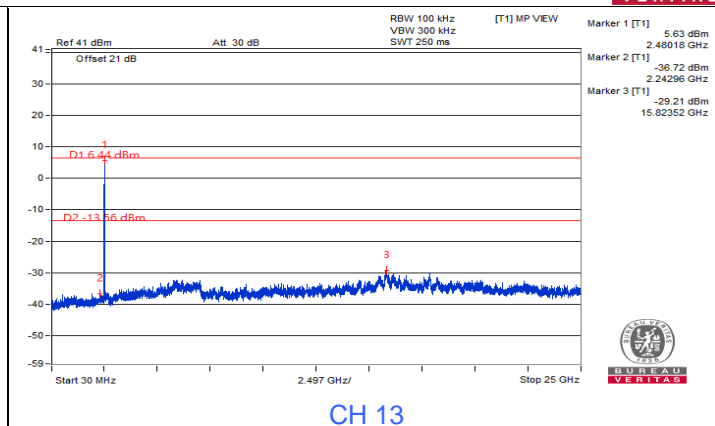
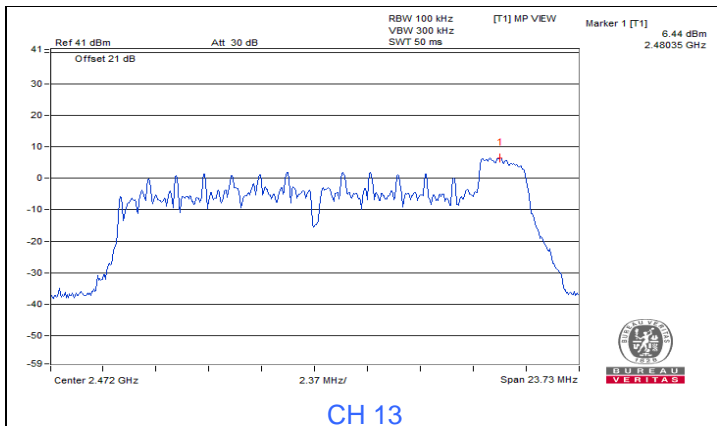




# 802.11ax (HE) 52-tone RU

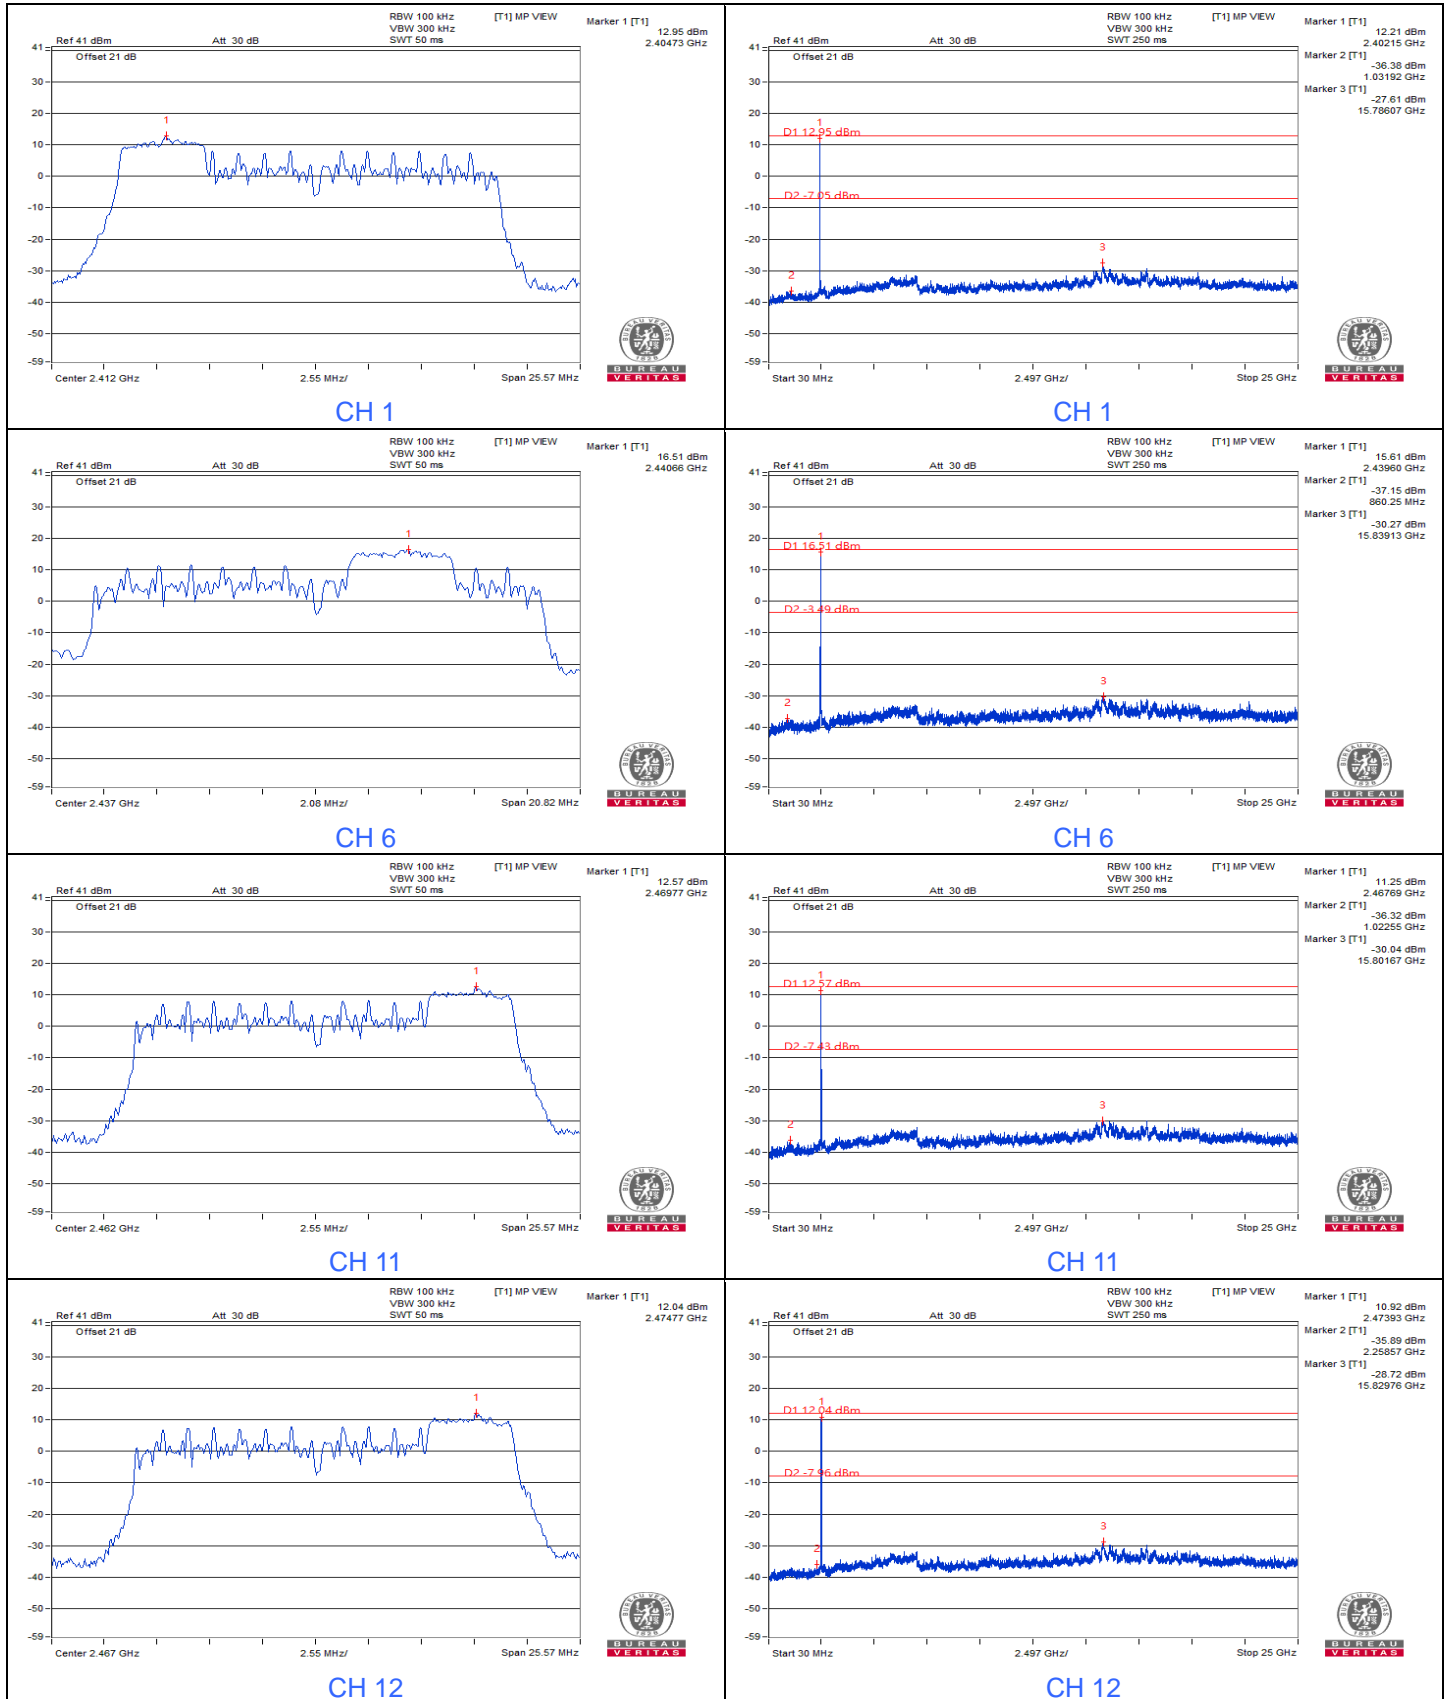





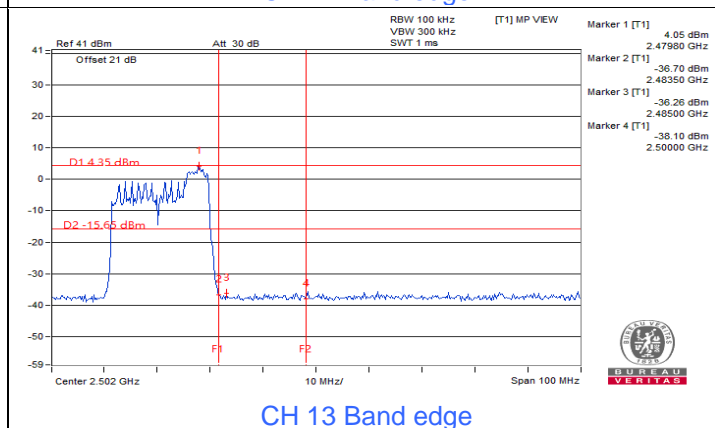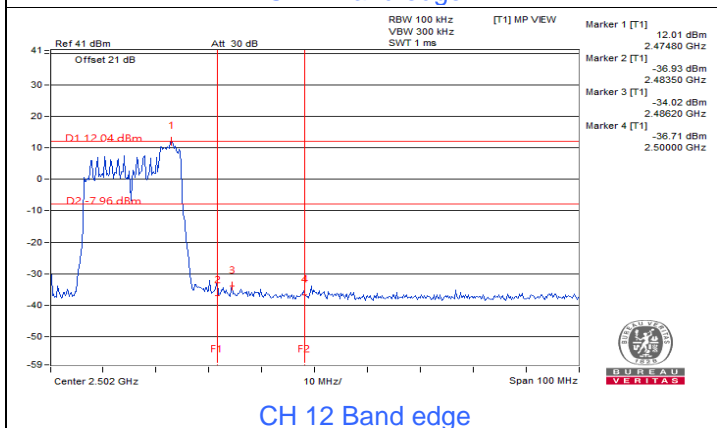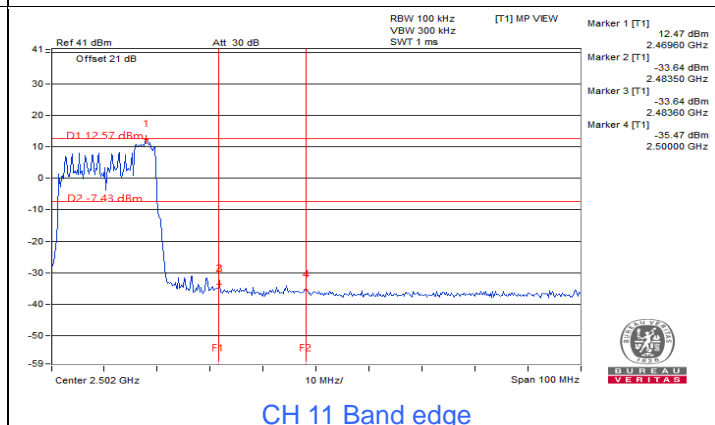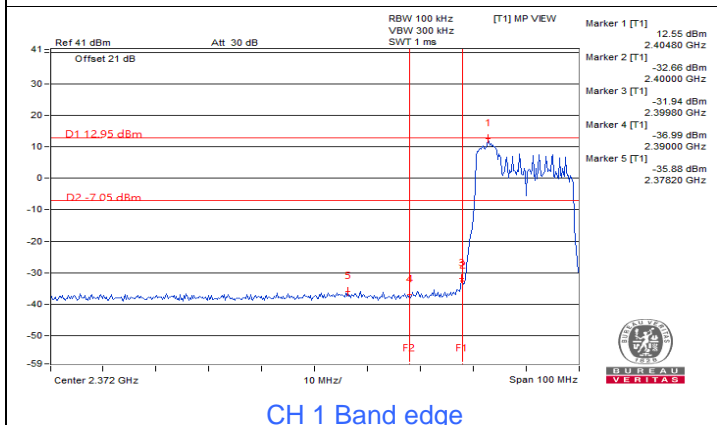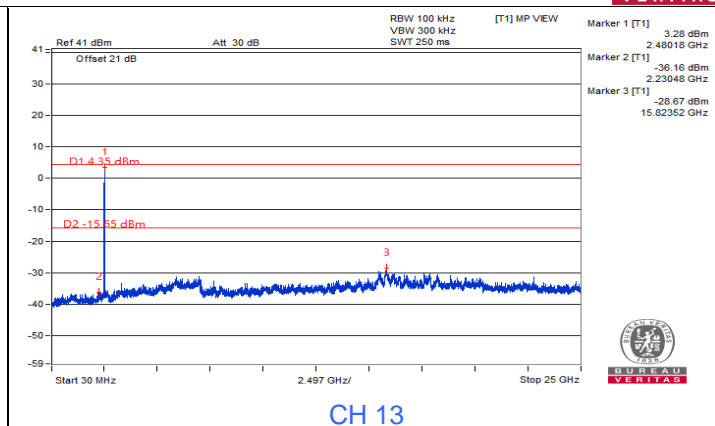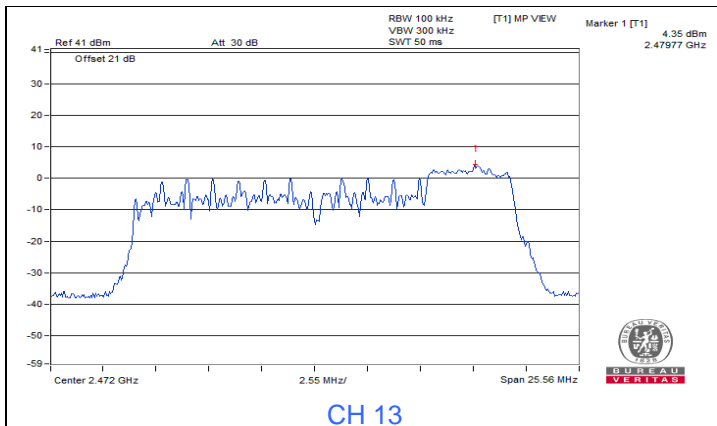




# 802.11ax (HE) 106-tone RU

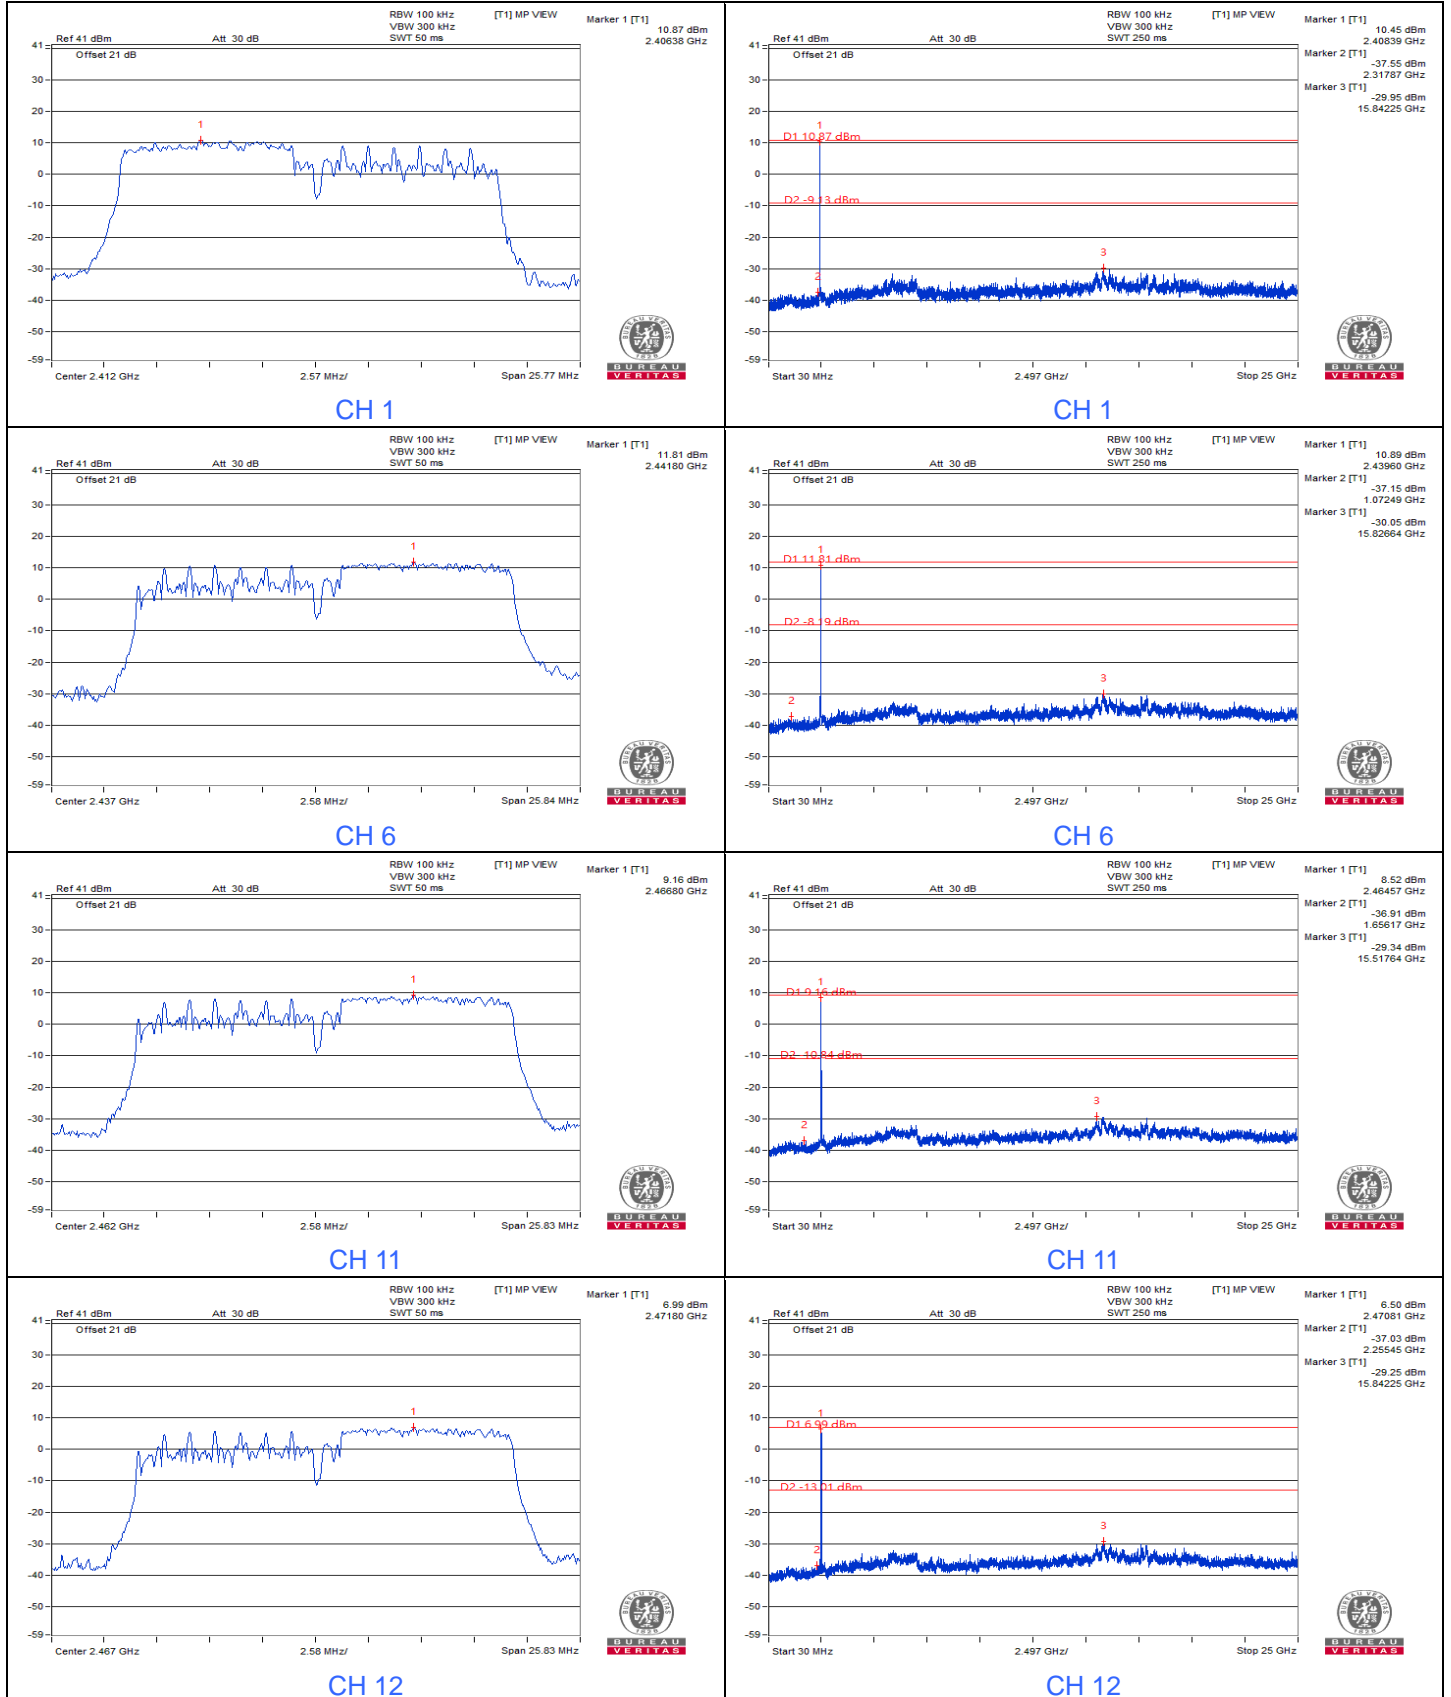


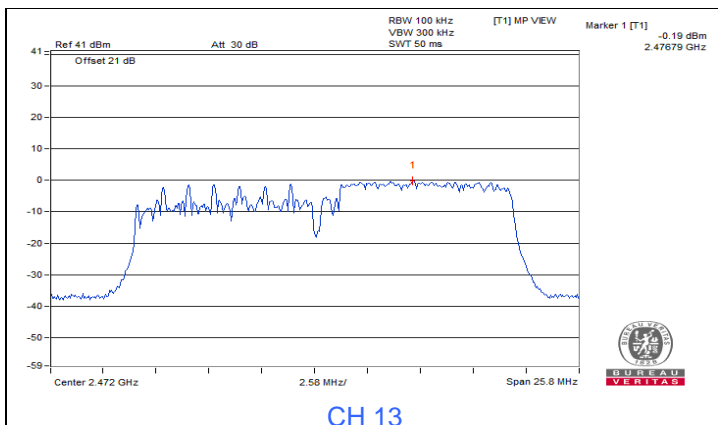


CH 13

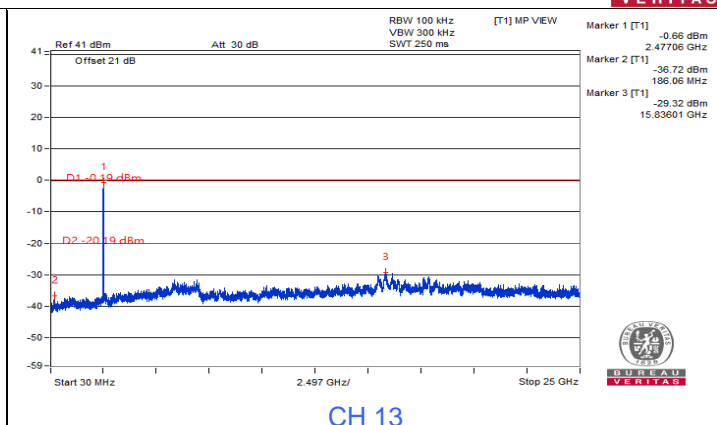


CH 13

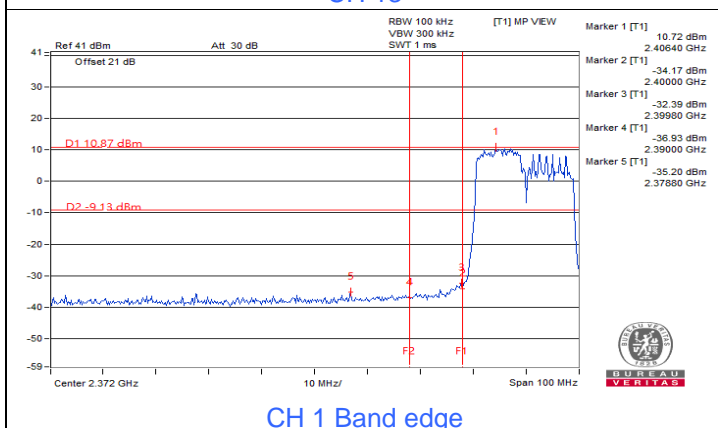


CH 1 Band edge

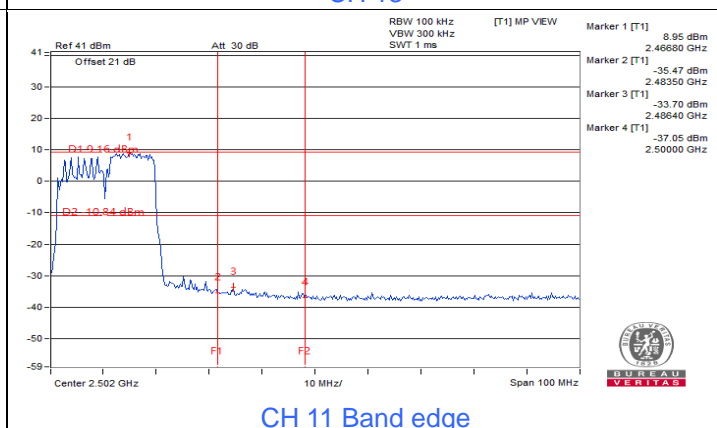

CH 11 Band edge

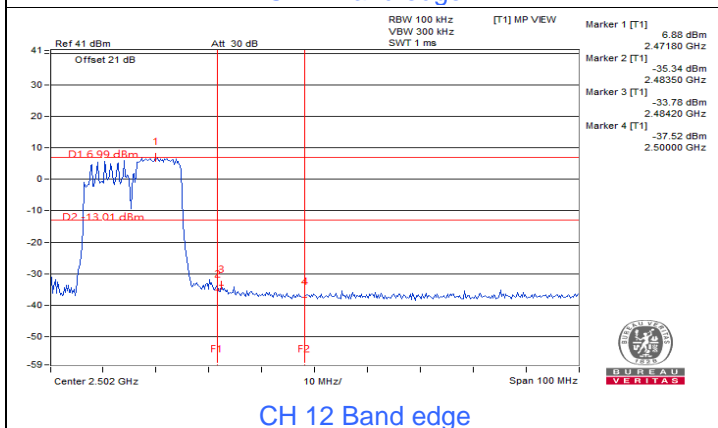

CH 12 Band edge

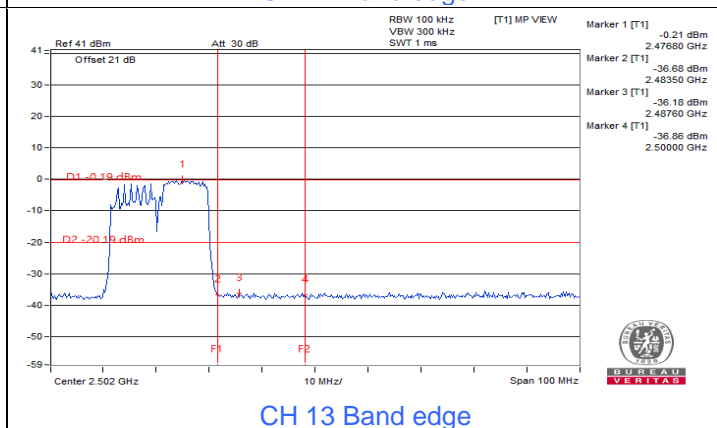

CH 13 Band edge

## 7.5 AC Power Conducted Emissions

### Mode B

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Sampson Chen		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18906	9.96	45.58	30.25	55.54	40.21	64.08	54.08	-8.54	-13.87
2	0.25547	9.96	35.17	17.49	45.13	27.45	61.58	51.58	-16.45	-24.13
3	0.31797	9.97	28.87	11.26	38.84	21.23	59.76	49.76	-20.92	-28.53
4	3.76172	10.14	29.38	21.72	39.52	31.86	56.00	46.00	-16.48	-14.14
5	5.45703	10.23	26.66	17.58	36.89	27.81	60.00	50.00	-23.11	-22.19
6	14.15234	10.75	23.22	11.27	33.97	22.02	60.00	50.00	-26.03	-27.98

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value




<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 71% RH
<b>Tested By</b>	Sampson Chen		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18125	9.94	44.67	27.69	54.61	37.63	64.43	54.43	-9.82	-16.80
2	0.25156	9.94	35.21	18.62	45.15	28.56	61.71	51.71	-16.56	-23.15
3	0.32969	9.94	27.27	6.22	37.21	16.16	59.46	49.46	-22.25	-33.30
4	3.81641	10.09	29.76	21.92	39.85	32.01	56.00	46.00	-16.15	-13.99
5	21.78125	10.84	23.50	17.78	34.34	28.62	60.00	50.00	-25.66	-21.38
6	27.45703	10.87	32.01	29.19	42.88	40.06	60.00	50.00	-17.12	-9.94

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

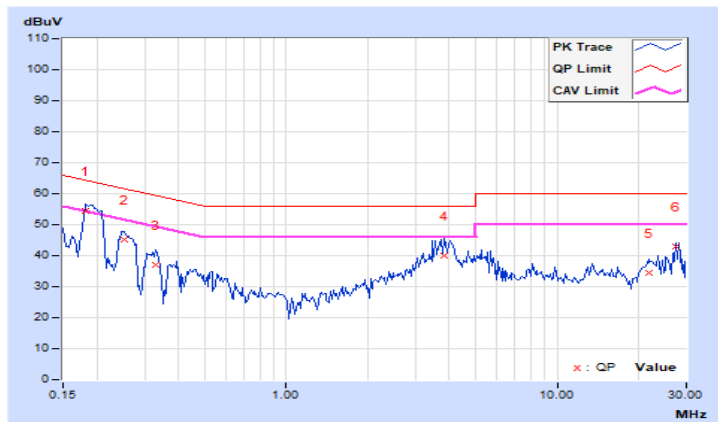

## 7.6 Unwanted Emissions below 1 GHz

### Mode A


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 76% RH
<b>Tested By</b>	Louis Yang		

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.30	31.6 QP	40.0	-8.4	1.12 H	360	44.6	-13.0
2	80.40	21.5 QP	40.0	-18.5	1.00 H	325	39.3	-17.8
3	236.50	33.5 QP	46.0	-12.5	1.52 H	360	48.2	-14.7
4	288.60	34.6 QP	46.0	-11.4	1.50 H	74	47.1	-12.5
5	389.20	24.4 QP	46.0	-21.6	1.05 H	360	34.6	-10.2
6	458.10	28.8 QP	46.0	-17.2	1.00 H	122	36.9	-8.1

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

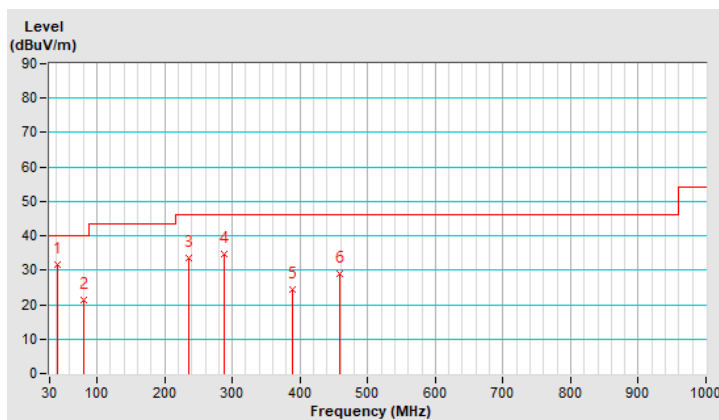


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 76% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.10	26.8 QP	40.0	-13.2	1.05 V	62	40.4	-13.6
2	141.10	30.1 QP	43.5	-13.4	1.00 V	325	43.1	-13.0
3	177.20	20.6 QP	43.5	-22.9	1.00 V	299	34.7	-14.1
4	232.20	36.2 QP	46.0	-9.8	1.00 V	172	51.4	-15.2
5	366.50	24.5 QP	46.0	-21.5	1.00 V	38	35.3	-10.8
6	641.20	25.6 QP	46.0	-20.4	1.12 V	355	30.1	-4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

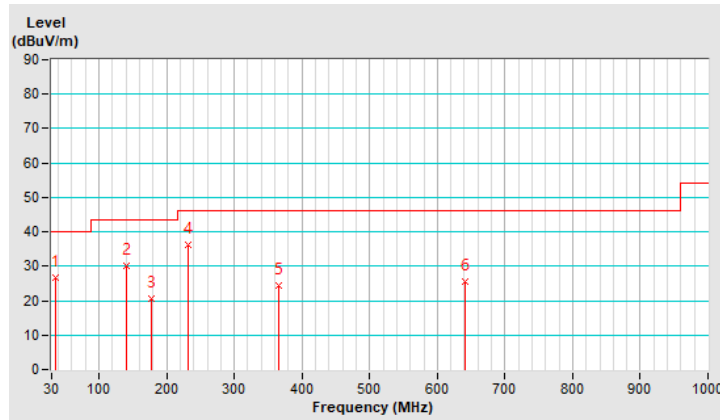


## Mode B

<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 76% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	45.10	33.4 QP	40.0	-6.6	1.12 H	360	46.2	-12.8
2	81.50	22.5 QP	40.0	-17.5	1.00 H	325	40.5	-18.0
3	237.90	33.7 QP	46.0	-12.3	1.52 H	360	48.3	-14.6
4	288.70	33.9 QP	46.0	-12.1	1.50 H	74	46.4	-12.5
5	389.90	24.7 QP	46.0	-21.3	1.05 H	360	34.8	-10.1
6	457.70	28.9 QP	46.0	-17.1	1.00 H	122	37.0	-8.1

### Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

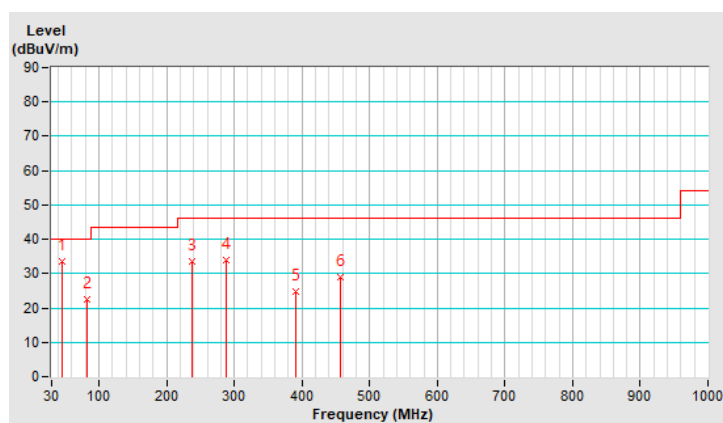




<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 76% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.20	24.6 QP	40.0	-15.4	1.05 V	62	37.9	-13.3
2	140.40	27.5 QP	43.5	-16.0	1.00 V	325	40.6	-13.1
3	179.60	23.0 QP	43.5	-20.5	1.00 V	299	37.4	-14.4
4	234.50	31.3 QP	46.0	-14.7	1.00 V	172	46.2	-14.9
5	365.80	21.3 QP	46.0	-24.7	1.00 V	38	32.1	-10.8
6	642.50	28.9 QP	46.0	-17.1	1.12 V	355	33.4	-4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

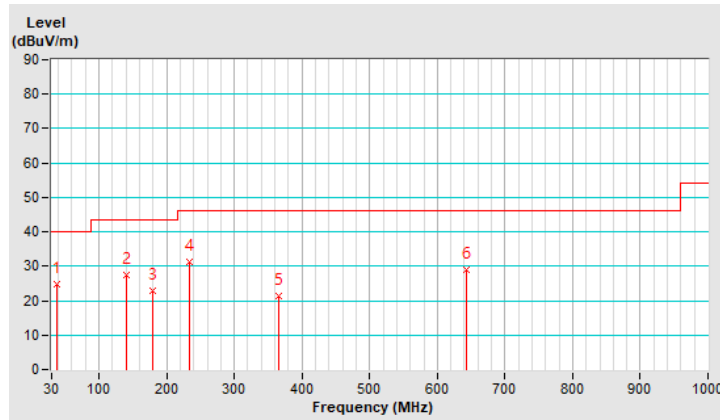


Mode C

<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	28°C, 76% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.70	31.4 QP	40.0	-8.6	1.12 H	360	44.1	-12.7
2	77.40	19.1 QP	40.0	-20.9	1.00 H	325	36.0	-16.9
3	233.70	30.7 QP	46.0	-15.3	1.52 H	360	45.7	-15.0
4	284.20	30.5 QP	46.0	-15.5	1.50 H	74	43.1	-12.6
5	383.50	20.4 QP	46.0	-25.6	1.05 H	360	30.7	-10.3
6	451.90	24.5 QP	46.0	-21.5	1.00 H	122	32.7	-8.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

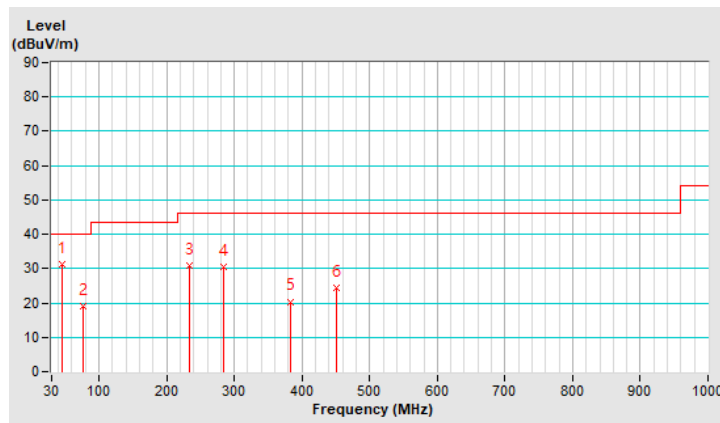


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 76% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.10	27.6 QP	40.0	-12.4	1.05 V	62	40.9	-13.3
2	141.70	30.7 QP	43.5	-12.8	1.00 V	325	43.6	-12.9
3	181.00	25.3 QP	43.5	-18.2	1.00 V	299	39.9	-14.6
4	<b>235.80</b>	<b>38.0 QP</b>	<b>46.0</b>	<b>-8.0</b>	<b>1.00 V</b>	<b>172</b>	<b>52.7</b>	<b>-14.7</b>
5	369.40	25.1 QP	46.0	-20.9	1.00 V	38	35.8	-10.7
6	642.80	29.2 QP	46.0	-16.8	1.12 V	355	33.7	-4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

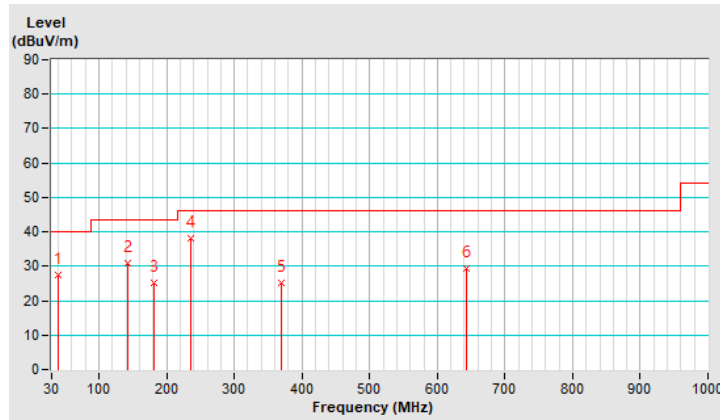

## 7.7 Unwanted Emissions above 1 GHz


### Mode A

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.5 PK	74.0	-15.5	3.38 H	281	61.9	-3.4
2	2390.00	52.1 AV	54.0	-1.9	3.38 H	281	55.5	-3.4
3	*2412.00	107.4 PK			3.38 H	281	110.8	-3.4
4	*2412.00	105.3 AV			3.38 H	281	108.7	-3.4
5	4824.00	40.1 PK	74.0	-33.9	3.19 H	284	38.8	1.3
6	4824.00	34.0 AV	54.0	-20.0	3.19 H	284	32.7	1.3

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

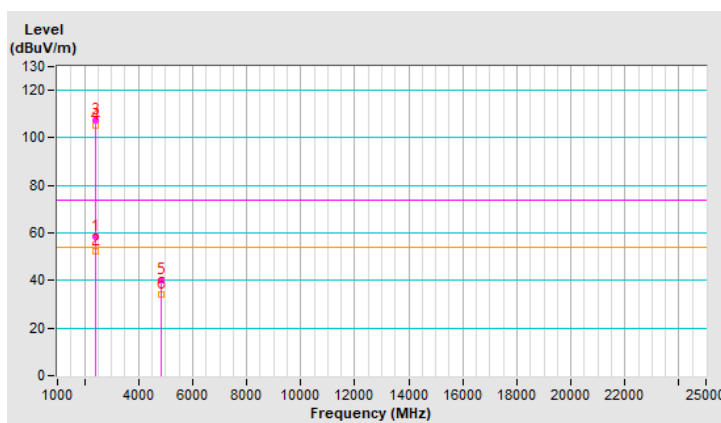


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	1.03 V	333	60.6	-3.4
2	2390.00	48.2 AV	54.0	-5.8	1.03 V	333	51.6	-3.4
3	*2412.00	104.6 PK			1.03 V	333	108.0	-3.4
4	*2412.00	102.2 AV			1.03 V	333	105.6	-3.4
5	4824.00	40.1 PK	74.0	-33.9	3.04 V	255	38.8	1.3
6	4824.00	32.8 AV	54.0	-21.2	3.04 V	255	31.5	1.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

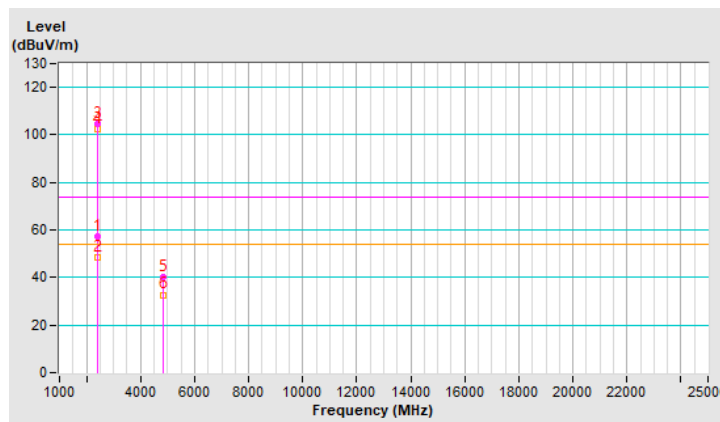


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.7 PK	74.0	-18.3	3.28 H	282	59.1	-3.4
2	2390.00	44.9 AV	54.0	-9.1	3.28 H	282	48.3	-3.4
3	*2437.00	107.6 PK			3.28 H	282	111.0	-3.4
4	*2437.00	105.5 AV			3.28 H	282	108.9	-3.4
5	2483.50	55.8 PK	74.0	-18.2	3.28 H	282	59.2	-3.4
6	2483.50	44.6 AV	54.0	-9.4	3.28 H	282	48.0	-3.4
7	4874.00	40.5 PK	74.0	-33.5	3.19 H	284	39.2	1.3
8	4874.00	34.0 AV	54.0	-20.0	3.19 H	284	32.7	1.3
9	7311.00	46.9 PK	74.0	-27.1	3.59 H	295	39.9	7.0
10	7311.00	38.8 AV	54.0	-15.2	3.59 H	295	31.8	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

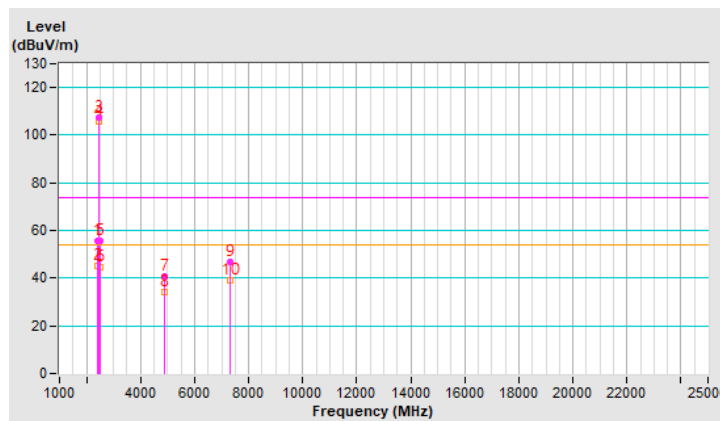


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.0 PK	74.0	-17.0	1.00 V	342	60.4	-3.4
2	2390.00	48.0 AV	54.0	-6.0	1.00 V	342	51.4	-3.4
3	*2437.00	104.8 PK			1.01 V	337	108.2	-3.4
4	*2437.00	102.5 AV			1.01 V	337	105.9	-3.4
5	2483.50	55.2 PK	74.0	-18.8	3.32 V	282	58.6	-3.4
6	2483.50	44.3 AV	54.0	-9.7	3.32 V	282	47.7	-3.4
7	4874.00	40.2 PK	74.0	-33.8	3.19 V	270	38.9	1.3
8	4874.00	33.8 AV	54.0	-20.2	3.19 V	270	32.5	1.3
9	7311.00	46.8 PK	74.0	-27.2	3.61 V	308	39.8	7.0
10	7311.00	38.9 AV	54.0	-15.1	3.61 V	308	31.9	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

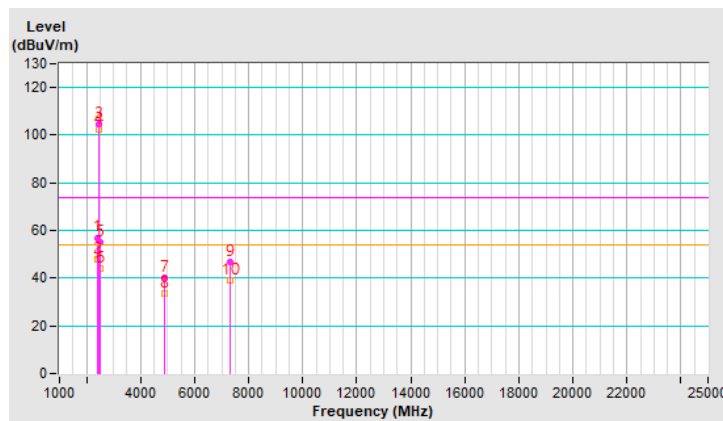

<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.1 PK			3.26 H	286	109.5	-3.4
2	*2462.00	104.6 AV			3.26 H	286	108.0	-3.4
3	2483.50	59.7 PK	74.0	-14.3	3.26 H	286	63.1	-3.4
4	2483.50	52.4 AV	54.0	-1.6	3.26 H	286	55.8	-3.4
5	4924.00	40.6 PK	74.0	-33.4	3.11 H	272	39.4	1.2
6	4924.00	33.4 AV	54.0	-20.6	3.11 H	272	32.2	1.2
7	7386.00	46.8 PK	74.0	-27.2	3.41 H	255	39.8	7.0
8	7386.00	38.3 AV	54.0	-15.7	3.41 H	255	31.3	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

