


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.6 PK			1.00 V	338	110.0	-3.4
2	*2462.00	104.1 AV			1.00 V	338	107.5	-3.4
3	2483.50	60.0 PK	74.0	-14.0	1.00 V	338	63.4	-3.4
4	2483.50	52.1 AV	54.0	-1.9	1.00 V	338	55.5	-3.4
5	4924.00	55.5 PK	74.0	-18.5	3.28 V	295	54.3	1.2
6	4924.00	44.5 AV	54.0	-9.5	3.28 V	295	43.3	1.2
7	7386.00	40.6 PK	74.0	-33.4	3.15 V	272	33.6	7.0
8	7386.00	34.0 AV	54.0	-20.0	3.15 V	272	27.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

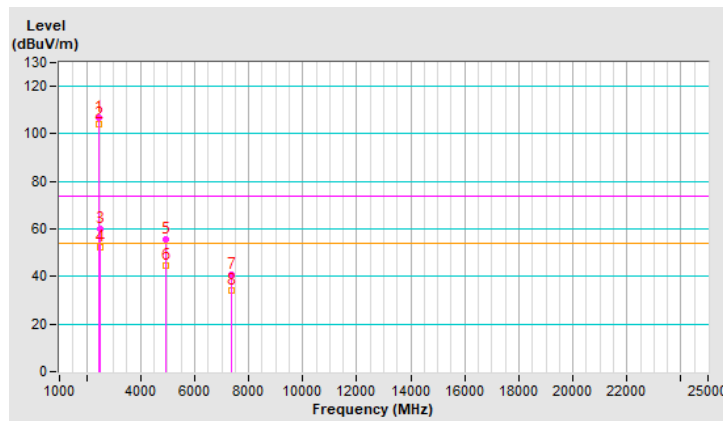


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.7 PK			3.18 H	280	110.1	-3.4
2	*2467.00	104.8 AV			3.18 H	280	108.2	-3.4
3	2483.50	59.6 PK	74.0	-14.4	3.18 H	280	63.0	-3.4
4	2483.50	52.3 AV	54.0	-1.7	3.18 H	280	55.7	-3.4
5	4934.00	40.3 PK	74.0	-33.7	3.21 H	241	39.1	1.2
6	4934.00	33.2 AV	54.0	-20.8	3.21 H	241	32.0	1.2
7	7401.00	46.2 PK	74.0	-27.8	3.42 H	263	39.2	7.0
8	7401.00	38.2 AV	54.0	-15.8	3.42 H	263	31.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

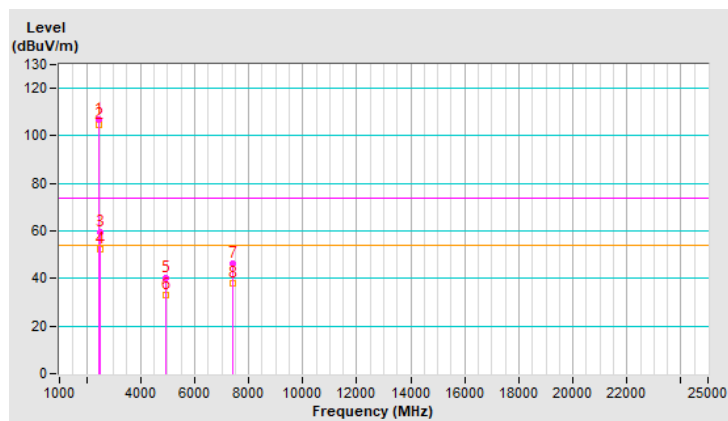


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	99.0 PK			1.53 V	360	102.4	-3.4
2	*2467.00	96.7 AV			1.53 V	360	100.1	-3.4
3	2483.50	56.6 PK	74.0	-17.4	1.53 V	360	60.0	-3.4
4	2483.50	47.7 AV	54.0	-6.3	1.53 V	360	51.1	-3.4
5	4934.00	39.7 PK	74.0	-34.3	3.20 V	259	38.5	1.2
6	4934.00	33.4 AV	54.0	-20.6	3.20 V	259	32.2	1.2
7	7401.00	47.3 PK	74.0	-26.7	3.57 V	308	40.3	7.0
8	7401.00	39.4 AV	54.0	-14.6	3.57 V	308	32.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

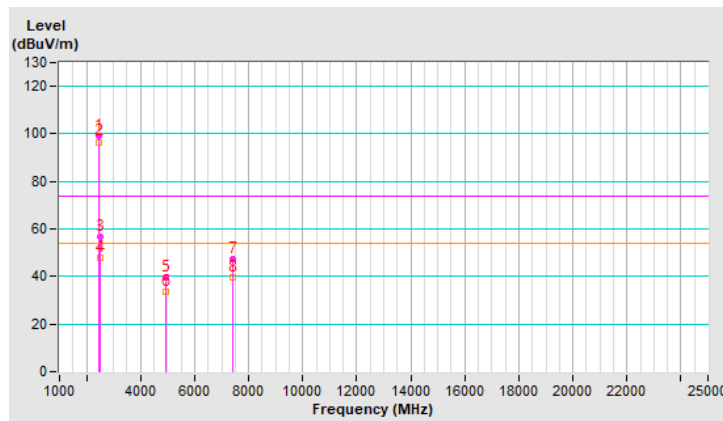


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	98.7 PK			3.23 H	284	102.1	-3.4
2	*2472.00	96.6 AV			3.23 H	284	100.0	-3.4
3	2483.50	59.7 PK	74.0	-14.3	3.23 H	284	63.1	-3.4
4	2483.50	52.2 AV	54.0	-1.8	3.23 H	284	55.6	-3.4
5	4944.00	40.2 PK	74.0	-33.8	3.23 H	282	39.0	1.2
6	4944.00	32.2 AV	54.0	-21.8	3.23 H	282	31.0	1.2
7	7416.00	46.1 PK	74.0	-27.9	3.33 H	274	38.9	7.2
8	7416.00	38.2 AV	54.0	-15.8	3.33 H	274	31.0	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

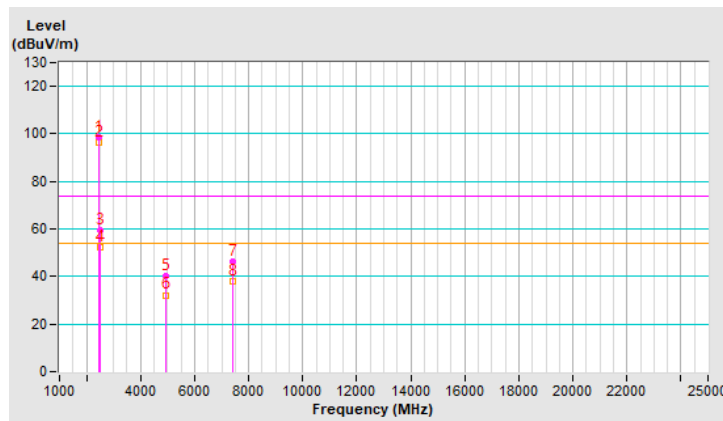


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.2 PK			1.12 V	341	102.6	-3.4
2	*2472.00	96.8 AV			1.12 V	341	100.2	-3.4
3	2483.50	58.6 PK	74.0	-15.4	1.12 V	341	62.0	-3.4
4	2483.50	51.0 AV	54.0	-3.0	1.12 V	341	54.4	-3.4
5	4944.00	38.9 PK	74.0	-35.1	3.20 V	288	37.7	1.2
6	4944.00	32.1 AV	54.0	-21.9	3.20 V	288	30.9	1.2
7	7416.00	45.9 PK	74.0	-28.1	3.54 V	304	38.7	7.2
8	7416.00	37.7 AV	54.0	-16.3	3.54 V	304	30.5	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

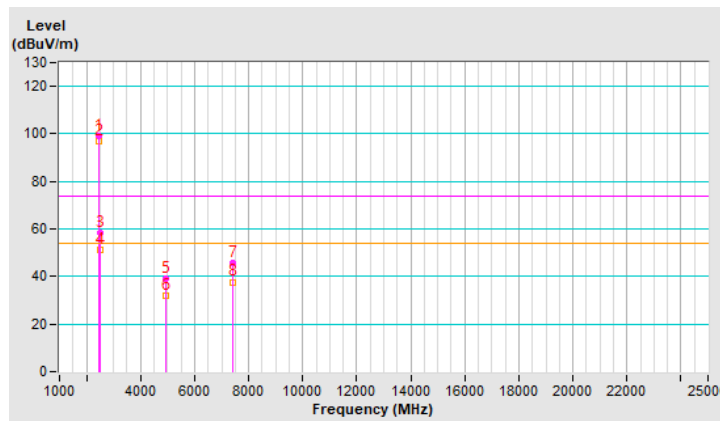


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.8 PK	74.0	-2.2	3.38 H	281	75.2	-3.4
2	2390.00	52.2 AV	54.0	-1.8	3.38 H	281	55.6	-3.4
3	*2412.00	114.2 PK			3.38 H	281	117.6	-3.4
4	*2412.00	104.2 AV			3.38 H	281	107.6	-3.4
5	4824.00	39.1 PK	74.0	-34.9	3.25 H	287	37.8	1.3
6	4824.00	28.1 AV	54.0	-25.9	3.25 H	287	26.8	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

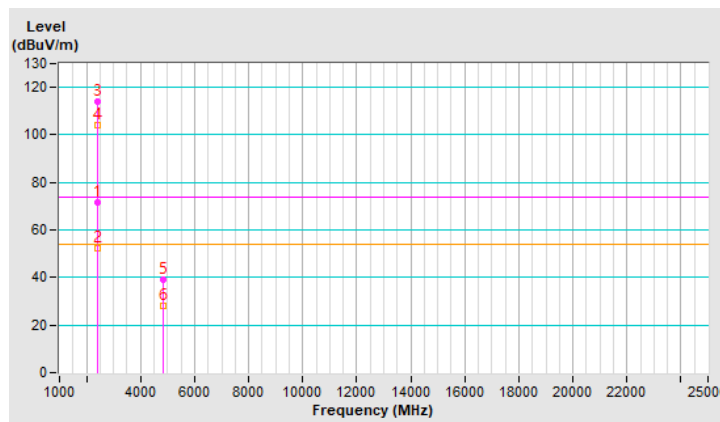


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.5 PK	74.0	-1.5	1.54 V	105	75.9	-3.4
2	2390.00	52.5 AV	54.0	-1.5	1.54 V	105	55.9	-3.4
3	*2412.00	111.7 PK			1.54 V	105	115.1	-3.4
4	*2412.00	101.7 AV			1.54 V	105	105.1	-3.4
5	4824.00	38.8 PK	74.0	-35.2	3.05 V	278	37.5	1.3
6	4824.00	29.1 AV	54.0	-24.9	3.05 V	278	27.8	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

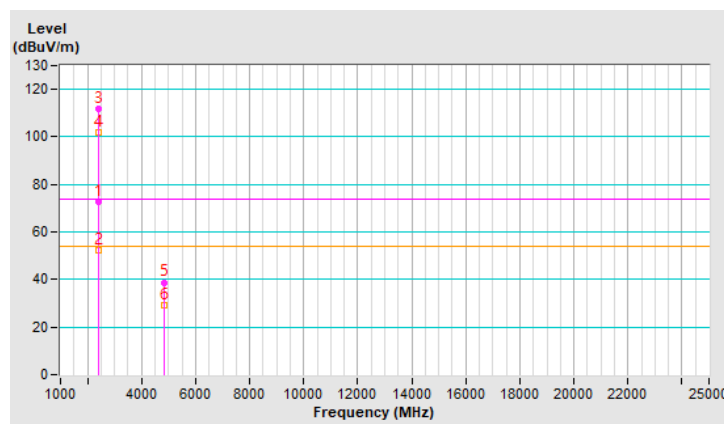


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.1 PK	74.0	-6.9	3.28 H	287	70.5	-3.4
2	2390.00	49.6 AV	54.0	-4.4	3.28 H	287	53.0	-3.4
3	*2437.00	115.4 PK			3.28 H	287	118.8	-3.4
4	*2437.00	105.3 AV			3.28 H	287	108.7	-3.4
5	2483.50	69.3 PK	74.0	-4.7	3.28 H	287	72.7	-3.4
6	2483.50	50.2 AV	54.0	-3.8	3.28 H	287	53.6	-3.4
7	4874.00	40.5 PK	74.0	-33.5	3.24 H	271	39.2	1.3
8	4874.00	30.3 AV	54.0	-23.7	3.24 H	271	29.0	1.3
9	7311.00	44.5 PK	74.0	-29.5	3.24 H	247	37.5	7.0
10	7311.00	34.5 AV	54.0	-19.5	3.24 H	247	27.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

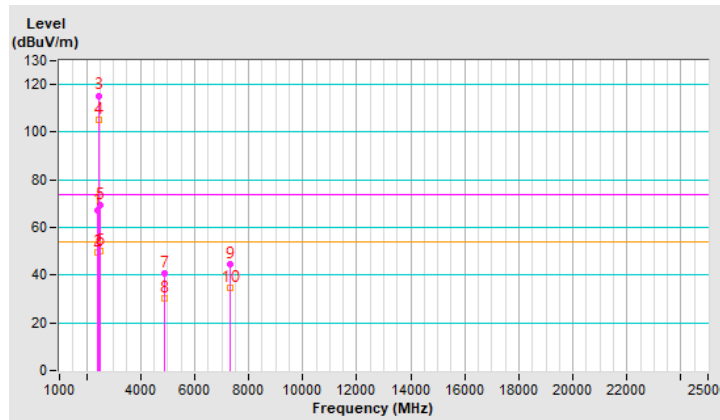


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.00 V	331	60.3	-3.4
2	2390.00	47.6 AV	54.0	-6.4	1.00 V	331	51.0	-3.4
3	*2437.00	102.3 PK			1.52 V	110	105.7	-3.4
4	*2437.00	101.4 AV			1.52 V	110	104.8	-3.4
5	2483.50	54.9 PK	74.0	-19.1	3.27 V	269	58.3	-3.4
6	2483.50	44.2 AV	54.0	-9.8	3.27 V	269	47.6	-3.4
7	4874.00	40.3 PK	74.0	-33.7	3.23 V	270	39.0	1.3
8	4874.00	34.2 AV	54.0	-19.8	3.23 V	270	32.9	1.3
9	7311.00	46.8 PK	74.0	-27.2	3.60 V	311	39.8	7.0
10	7311.00	38.9 AV	54.0	-15.1	3.60 V	311	31.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

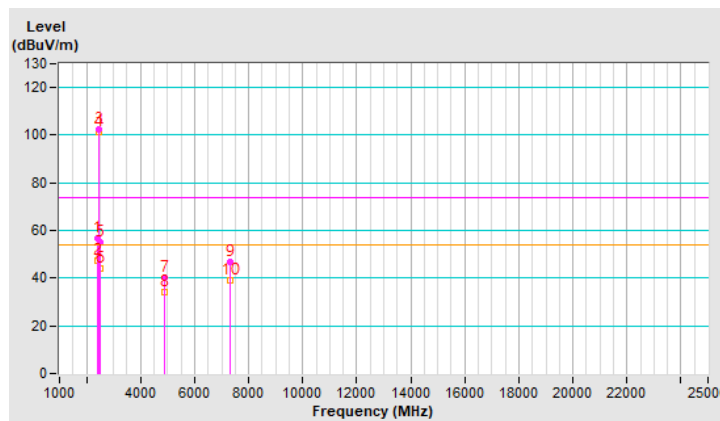


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.6 PK			3.30 H	287	115.0	-3.4
2	*2462.00	101.9 AV			3.30 H	287	105.3	-3.4
3	2483.50	71.2 PK	74.0	-2.8	3.30 H	287	74.6	-3.4
4	2483.50	52.3 AV	54.0	-1.7	3.30 H	287	55.7	-3.4
5	4924.00	40.3 PK	74.0	-33.7	3.11 H	287	39.1	1.2
6	4924.00	30.5 AV	54.0	-23.5	3.11 H	287	29.3	1.2
7	7386.00	44.6 PK	74.0	-29.4	3.24 H	246	37.6	7.0
8	7386.00	34.4 AV	54.0	-19.6	3.24 H	246	27.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

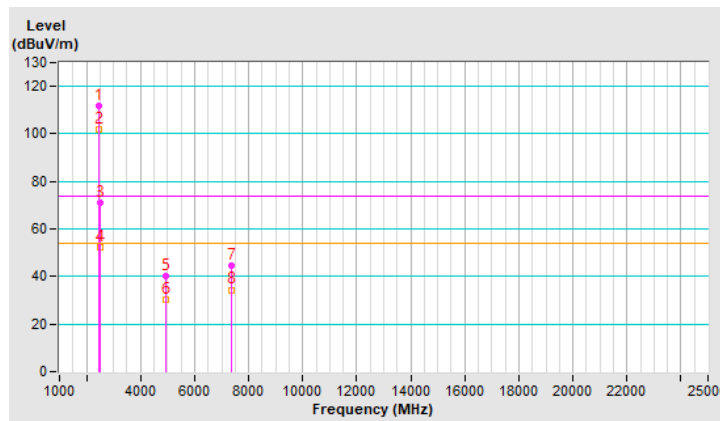


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.4 PK			1.49 V	96	112.8	-3.4
2	*2462.00	99.3 AV			1.49 V	96	102.7	-3.4
3	2483.50	70.8 PK	74.0	-3.2	1.49 V	96	74.2	-3.4
4	2483.50	51.9 AV	54.0	-2.1	1.49 V	96	55.3	-3.4
5	4924.00	40.0 PK	74.0	-34.0	3.20 V	282	38.8	1.2
6	4924.00	33.8 AV	54.0	-20.2	3.20 V	282	32.6	1.2
7	7386.00	46.7 PK	74.0	-27.3	3.60 V	297	39.7	7.0
8	7386.00	38.8 AV	54.0	-15.2	3.60 V	297	31.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

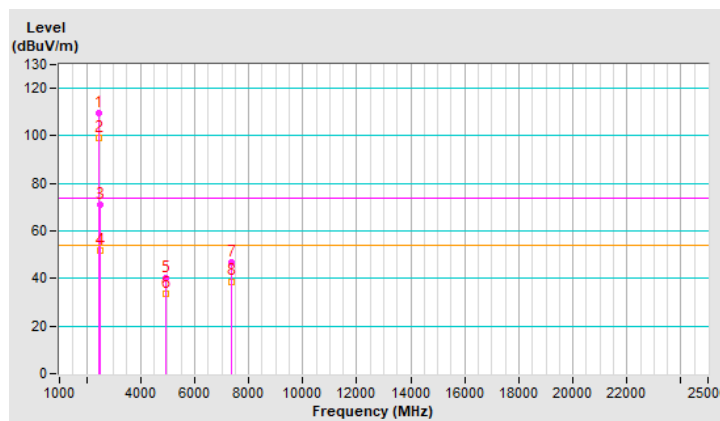


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.7 PK			3.19 H	287	110.1	-3.4
2	*2467.00	97.0 AV			3.19 H	287	100.4	-3.4
3	2483.50	72.2 PK	74.0	-1.8	3.19 H	287	75.6	-3.4
4	2483.50	51.0 AV	54.0	-3.0	3.19 H	287	54.4	-3.4
5	4934.00	40.3 PK	74.0	-33.7	3.21 H	244	39.1	1.2
6	4934.00	30.5 AV	54.0	-23.5	3.21 H	244	29.3	1.2
7	7401.00	44.3 PK	74.0	-29.7	3.21 H	252	37.3	7.0
8	7401.00	34.5 AV	54.0	-19.5	3.21 H	252	27.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

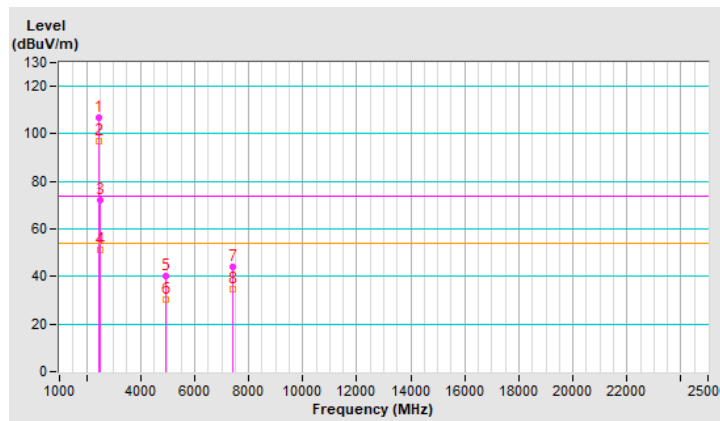


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.0 PK			1.58 V	110	109.4	-3.4
2	*2467.00	96.8 AV			1.58 V	110	100.2	-3.4
3	2483.50	72.1 PK	74.0	-1.9	1.58 V	110	75.5	-3.4
4	2483.50	51.7 AV	54.0	-2.3	1.58 V	110	55.1	-3.4
5	4934.00	39.9 PK	74.0	-34.1	3.25 V	277	38.7	1.2
6	4934.00	33.7 AV	54.0	-20.3	3.25 V	277	32.5	1.2
7	7401.00	46.7 PK	74.0	-27.3	3.64 V	300	39.7	7.0
8	7401.00	39.0 AV	54.0	-15.0	3.64 V	300	32.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

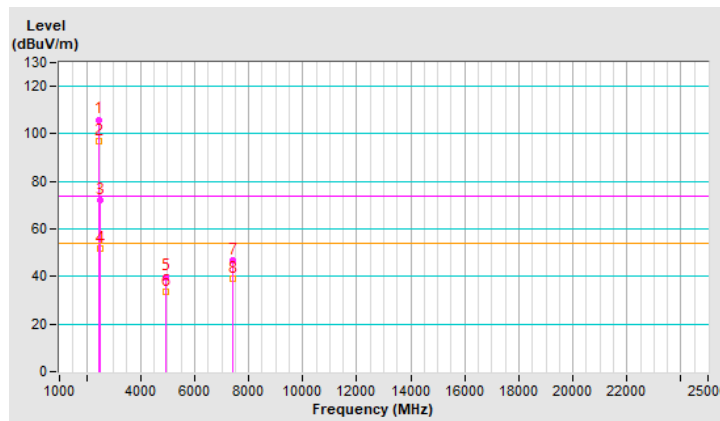


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	93.8 PK			3.19 H	287	97.2	-3.4
2	*2472.00	84.1 AV			3.19 H	287	87.5	-3.4
3	2483.50	72.1 PK	74.0	-1.9	3.19 H	287	75.5	-3.4
4	2483.50	49.2 AV	54.0	-4.8	3.19 H	287	52.6	-3.4
5	4944.00	40.6 PK	74.0	-33.4	3.21 H	241	39.4	1.2
6	4944.00	30.3 AV	54.0	-23.7	3.21 H	241	29.1	1.2
7	7416.00	44.4 PK	74.0	-29.6	3.24 H	264	37.2	7.2
8	7416.00	34.4 AV	54.0	-19.6	3.24 H	264	27.2	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

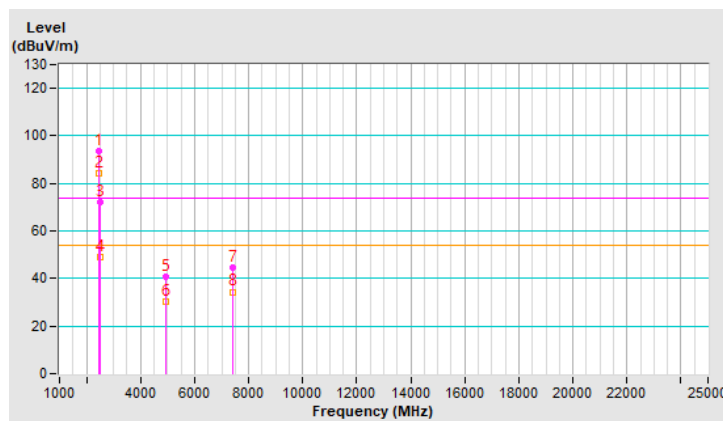


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	94.5 PK			1.58 V	100	97.9	-3.4
2	*2472.00	87.8 AV			1.58 V	100	91.2	-3.4
3	2483.50	68.9 PK	74.0	-5.1	1.58 V	100	72.3	-3.4
4	2483.50	52.4 AV	54.0	-1.6	1.58 V	100	55.8	-3.4
5	4944.00	40.7 PK	74.0	-33.3	3.14 V	279	39.5	1.2
6	4944.00	34.0 AV	54.0	-20.0	3.14 V	279	32.8	1.2
7	7416.00	46.9 PK	74.0	-27.1	3.65 V	313	39.7	7.2
8	7416.00	39.0 AV	54.0	-15.0	3.65 V	313	31.8	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

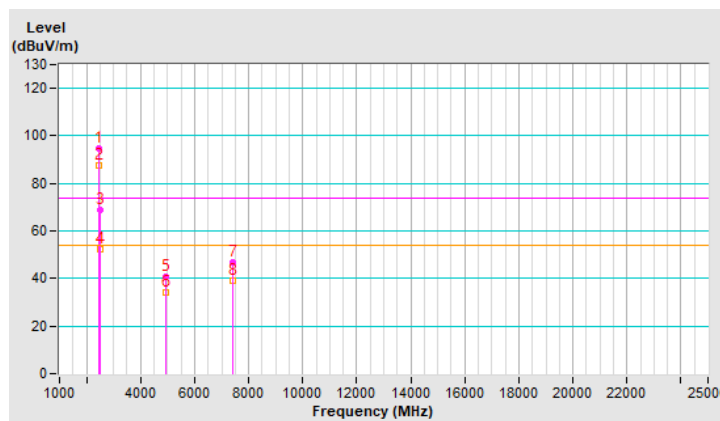


RF Mode	802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.6 PK	74.0	-6.4	3.39 H	282	71.0	-3.4
2	2390.00	52.5 AV	54.0	-1.5	3.39 H	282	55.9	-3.4
3	*2412.00	115.8 PK			3.39 H	282	119.2	-3.4
4	*2412.00	104.6 AV			3.39 H	282	108.0	-3.4
5	4824.00	40.4 PK	74.0	-33.6	3.31 H	242	39.1	1.3
6	4824.00	30.5 AV	54.0	-23.5	3.31 H	242	29.2	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

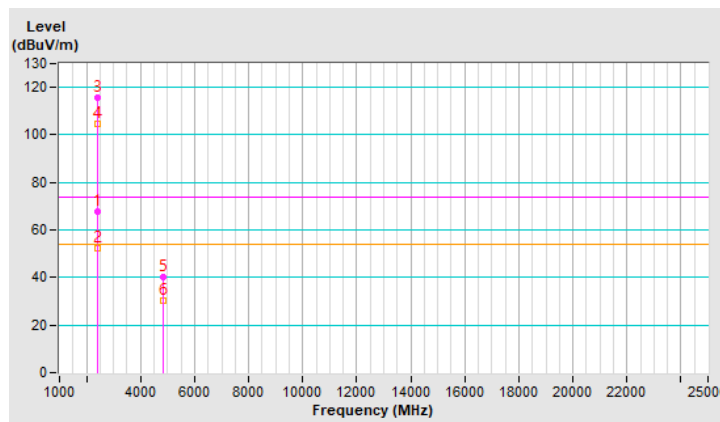


RF Mode	802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	1.57 V	117	70.3	-3.4
2	2390.00	52.1 AV	54.0	-1.9	1.57 V	117	55.5	-3.4
3	*2412.00	112.4 PK			1.57 V	117	115.8	-3.4
4	*2412.00	101.1 AV			1.57 V	117	104.5	-3.4
5	4824.00	40.1 PK	74.0	-33.9	3.21 V	267	38.8	1.3
6	4824.00	33.6 AV	54.0	-20.4	3.21 V	267	32.3	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

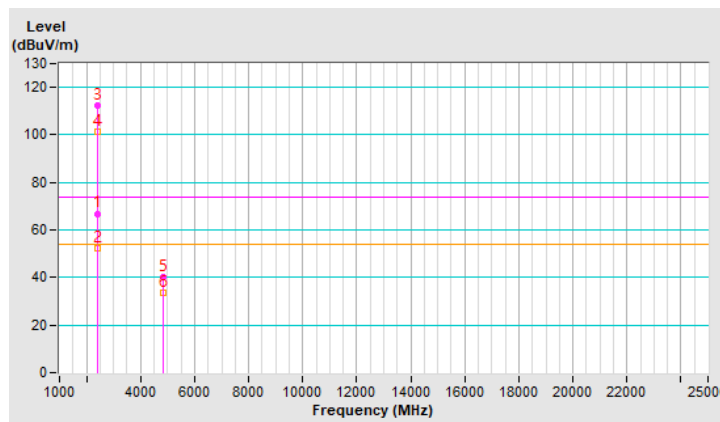


RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.8 PK	74.0	-9.2	3.39 H	282	68.2	-3.4
2	2390.00	52.2 AV	54.0	-1.8	3.39 H	282	55.6	-3.4
3	*2437.00	112.3 PK			3.39 H	282	115.7	-3.4
4	*2437.00	100.7 AV			3.39 H	282	104.1	-3.4
5	2483.50	65.4 PK	74.0	-8.6	3.39 H	282	68.8	-3.4
6	2483.50	52.2 AV	54.0	-1.8	3.39 H	282	55.6	-3.4
7	4874.00	40.3 PK	74.0	-33.7	3.25 H	248	39.0	1.3
8	4874.00	30.1 AV	54.0	-23.9	3.25 H	248	28.8	1.3
9	7311.00	44.3 PK	74.0	-29.7	3.36 H	271	37.3	7.0
10	7311.00	34.2 AV	54.0	-19.8	3.36 H	271	27.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

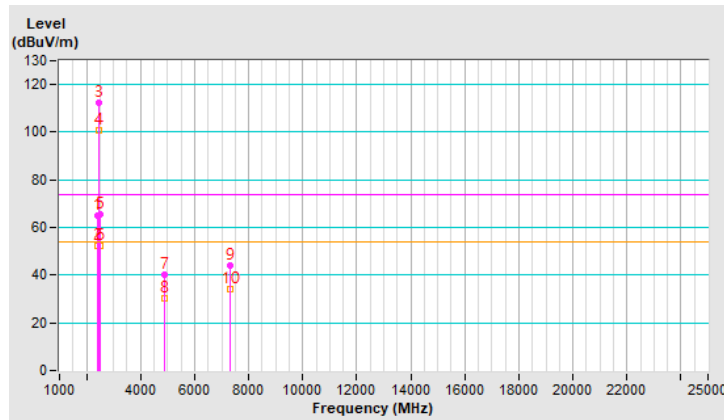


RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.2 PK	74.0	-12.8	1.02 V	346	64.6	-3.4
2	2390.00	51.4 AV	54.0	-2.6	1.02 V	346	54.8	-3.4
3	*2437.00	108.8 PK			1.02 V	346	112.2	-3.4
4	*2437.00	96.9 AV			1.02 V	346	100.3	-3.4
5	2483.50	62.1 PK	74.0	-11.9	1.02 V	346	65.5	-3.4
6	2483.50	51.4 AV	54.0	-2.6	1.02 V	346	54.8	-3.4
7	4874.00	40.5 PK	74.0	-33.5	3.14 V	273	39.2	1.3
8	4874.00	34.0 AV	54.0	-20.0	3.14 V	273	32.7	1.3
9	7311.00	47.0 PK	74.0	-27.0	3.60 V	314	40.0	7.0
10	7311.00	39.2 AV	54.0	-14.8	3.60 V	314	32.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

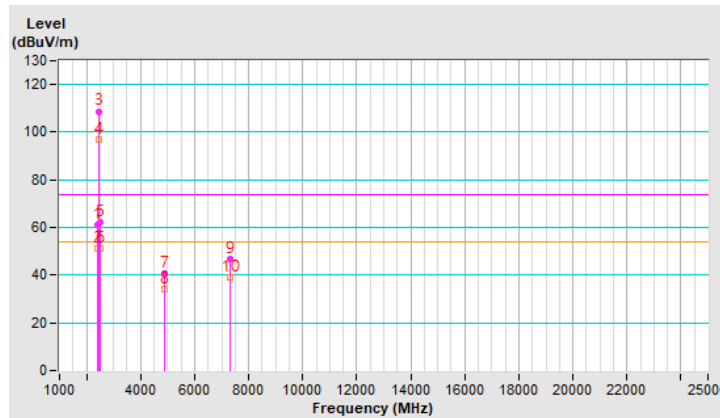


RF Mode	802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.4 PK			3.39 H	282	112.8	-3.4
2	*2462.00	97.7 AV			3.39 H	282	101.1	-3.4
3	2483.50	68.3 PK	74.0	-5.7	3.39 H	282	71.7	-3.4
4	2483.50	52.4 AV	54.0	-1.6	3.39 H	282	55.8	-3.4
5	4924.00	40.3 PK	74.0	-33.7	3.21 H	275	39.1	1.2
6	4924.00	30.5 AV	54.0	-23.5	3.21 H	275	29.3	1.2
7	7386.00	44.6 PK	74.0	-29.4	3.22 H	282	37.6	7.0
8	7386.00	34.4 AV	54.0	-19.6	3.22 H	282	27.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

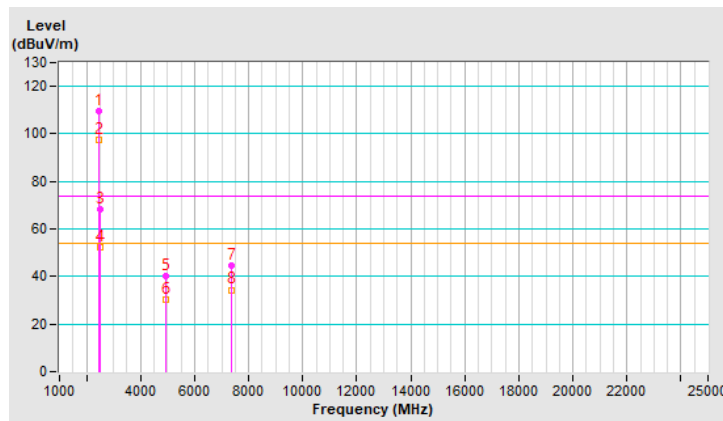


RF Mode	802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.1 PK			1.58 V	107	106.5	-3.4
2	*2462.00	92.7 AV			1.58 V	107	96.1	-3.4
3	2483.50	58.9 PK	74.0	-15.1	1.58 V	107	62.3	-3.4
4	2483.50	48.0 AV	54.0	-6.0	1.58 V	107	51.4	-3.4
5	4924.00	40.0 PK	74.0	-34.0	3.20 V	259	38.8	1.2
6	4924.00	33.7 AV	54.0	-20.3	3.20 V	259	32.5	1.2
7	7386.00	47.3 PK	74.0	-26.7	3.61 V	324	40.3	7.0
8	7386.00	39.3 AV	54.0	-14.7	3.61 V	324	32.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

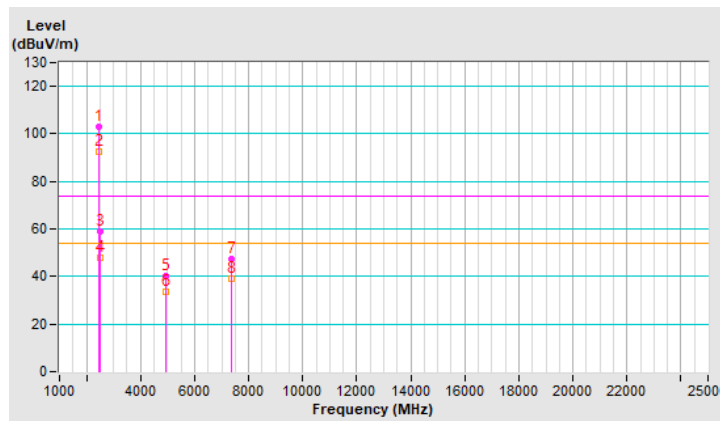


RF Mode	802.11ax (HE20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.5 PK			3.39 H	282	111.9	-3.4
2	*2467.00	96.5 AV			3.39 H	282	99.9	-3.4
3	2483.50	71.9 PK	74.0	-2.1	3.39 H	282	75.3	-3.4
4	2483.50	52.2 AV	54.0	-1.8	3.39 H	282	55.6	-3.4
5	4934.00	40.5 PK	74.0	-33.5	3.21 H	271	39.3	1.2
6	4934.00	30.4 AV	54.0	-23.6	3.21 H	271	29.2	1.2
7	7401.00	44.2 PK	74.0	-29.8	3.15 H	241	37.2	7.0
8	7401.00	34.2 AV	54.0	-19.8	3.15 H	241	27.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

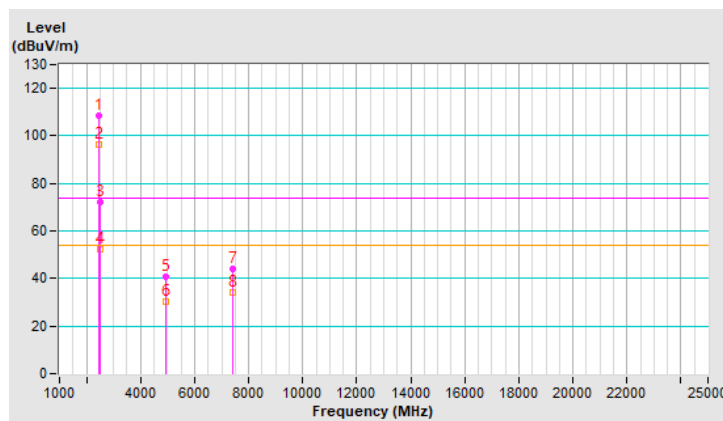


RF Mode	802.11ax (HE20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	105.7 PK			1.03 V	330	109.1	-3.4
2	*2467.00	92.8 AV			1.03 V	330	96.2	-3.4
3	2483.50	68.8 PK	74.0	-5.2	1.03 V	330	72.2	-3.4
4	2483.50	51.5 AV	54.0	-2.5	1.03 V	330	54.9	-3.4
5	4934.00	40.1 PK	74.0	-33.9	3.22 V	275	38.9	1.2
6	4934.00	34.0 AV	54.0	-20.0	3.22 V	275	32.8	1.2
7	7401.00	47.3 PK	74.0	-26.7	3.61 V	314	40.3	7.0
8	7401.00	39.1 AV	54.0	-14.9	3.61 V	314	32.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

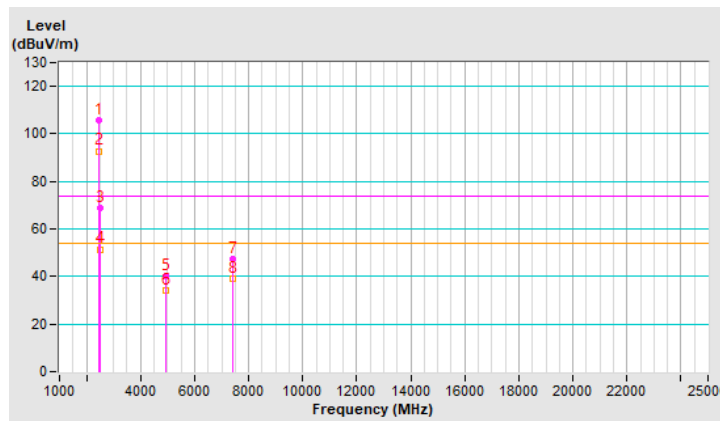


RF Mode	802.11ax (HE20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	91.8 PK			3.22 H	282	95.2	-3.4
2	*2472.00	80.4 AV			3.22 H	282	83.8	-3.4
3	2483.50	72.0 PK	74.0	-2.0	3.22 H	282	75.4	-3.4
4	2483.50	47.2 AV	54.0	-6.8	3.22 H	282	50.6	-3.4
5	4944.00	35.1 PK	74.0	-38.9	3.26 H	254	33.9	1.2
6	4944.00	25.0 AV	54.0	-29.0	3.26 H	254	23.8	1.2
7	7416.00	40.1 PK	74.0	-33.9	3.26 H	248	32.9	7.2
8	7416.00	30.2 AV	54.0	-23.8	3.26 H	248	23.0	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

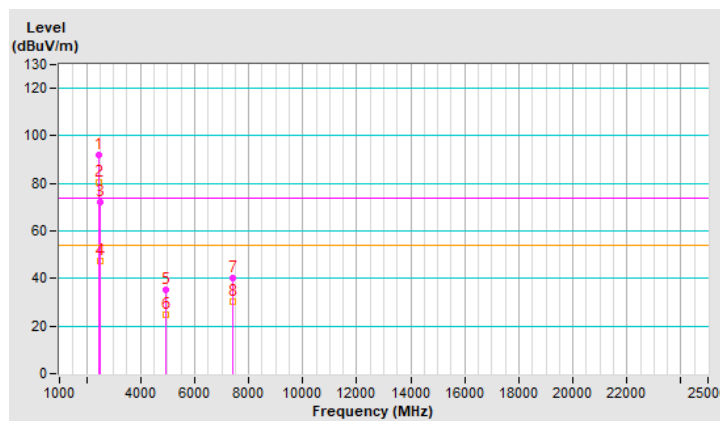


RF Mode	802.11ax (HE20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.5 PK			1.49 V	103	108.9	-3.4
2	*2472.00	90.0 AV			1.49 V	103	93.4	-3.4
3	2483.50	64.2 PK	74.0	-9.8	1.49 V	103	67.6	-3.4
4	2483.50	51.0 AV	54.0	-3.0	1.49 V	103	54.4	-3.4
5	4944.00	35.2 PK	74.0	-38.8	3.21 V	268	34.0	1.2
6	4944.00	27.6 AV	54.0	-26.4	3.21 V	268	26.4	1.2
7	7416.00	41.4 PK	74.0	-32.6	3.66 V	303	34.2	7.2
8	7416.00	32.4 AV	54.0	-21.6	3.66 V	303	25.2	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

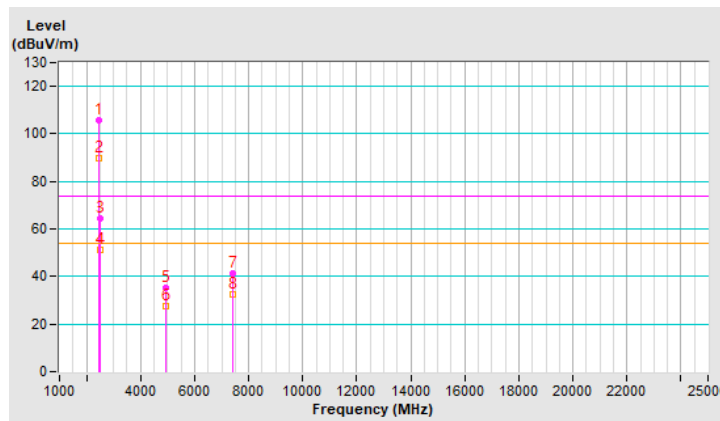


RF Mode	802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.2 PK	74.0	-1.8	3.35 H	285	75.6	-3.4
2	2390.00	50.0 AV	54.0	-4.0	3.35 H	285	53.4	-3.4
3	*2422.00	114.1 PK			3.35 H	285	117.5	-3.4
4	*2422.00	102.0 AV			3.35 H	285	105.4	-3.4
5	4844.00	39.1 PK	74.0	-34.9	3.15 H	252	37.8	1.3
6	4844.00	29.3 AV	54.0	-24.7	3.15 H	252	28.0	1.3
7	7266.00	41.3 PK	74.0	-32.7	3.25 H	333	34.1	7.2
8	7266.00	31.2 AV	54.0	-22.8	3.25 H	333	24.0	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

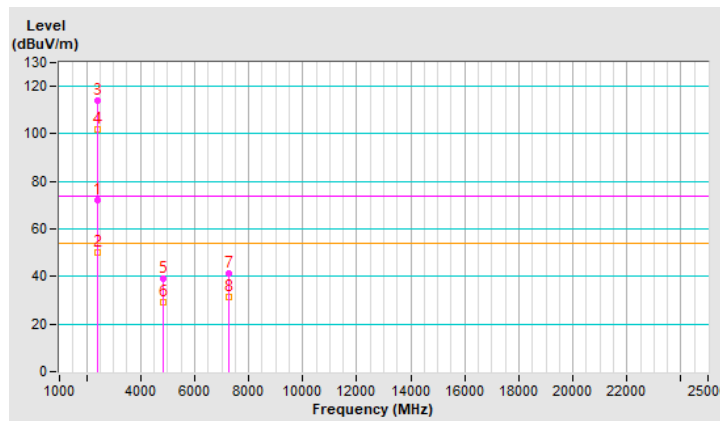


RF Mode	802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	1.56 V	113	74.0	-3.4
2	2390.00	49.6 AV	54.0	-4.4	1.56 V	113	53.0	-3.4
3	*2422.00	102.6 PK			1.56 V	113	106.0	-3.4
4	*2422.00	91.0 AV			1.56 V	113	94.4	-3.4
5	4844.00	40.5 PK	74.0	-33.5	3.13 V	262	39.2	1.3
6	4844.00	34.3 AV	54.0	-19.7	3.13 V	262	33.0	1.3
7	7266.00	47.1 PK	74.0	-26.9	3.56 V	318	39.9	7.2
8	7266.00	39.1 AV	54.0	-14.9	3.56 V	318	31.9	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

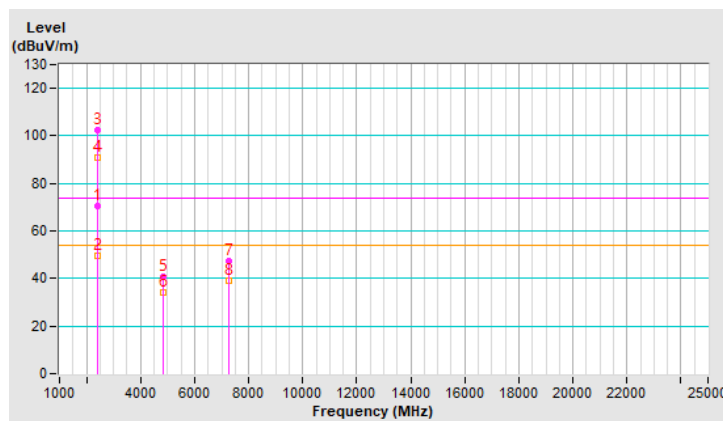


RF Mode	802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.5 PK	74.0	-5.5	3.28 H	281	71.9	-3.4
2	2390.00	52.3 AV	54.0	-1.7	3.28 H	281	55.7	-3.4
3	*2437.00	111.6 PK			3.28 H	281	115.0	-3.4
4	*2437.00	99.6 AV			3.28 H	281	103.0	-3.4
5	2483.50	72.2 PK	74.0	-1.8	3.28 H	281	75.6	-3.4
6	2483.50	52.3 AV	54.0	-1.7	3.28 H	281	55.7	-3.4
7	4874.00	40.3 PK	74.0	-33.7	3.12 H	252	39.0	1.3
8	4874.00	30.5 AV	54.0	-23.5	3.12 H	252	29.2	1.3
9	7311.00	42.3 PK	74.0	-31.7	1.00 H	0	35.3	7.0
10	7311.00	32.2 AV	54.0	-21.8	1.00 H	0	25.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

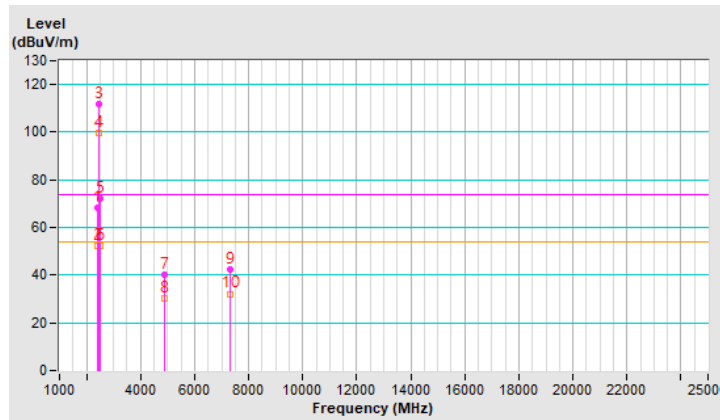


RF Mode	802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.6 PK	74.0	-7.4	1.00 V	318	70.0	-3.4
2	2390.00	49.1 AV	54.0	-4.9	1.00 V	318	52.5	-3.4
3	*2437.00	103.6 PK			1.00 V	318	107.0	-3.4
4	*2437.00	93.4 AV			1.00 V	318	96.8	-3.4
5	2483.50	66.7 PK	74.0	-7.3	1.00 V	318	70.1	-3.4
6	2483.50	49.4 AV	54.0	-4.6	1.00 V	318	52.8	-3.4
7	4874.00	40.0 PK	74.0	-34.0	3.22 V	258	38.7	1.3
8	4874.00	33.3 AV	54.0	-20.7	3.22 V	258	32.0	1.3
9	7311.00	46.8 PK	74.0	-27.2	3.58 V	315	39.8	7.0
10	7311.00	38.9 AV	54.0	-15.1	3.58 V	315	31.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

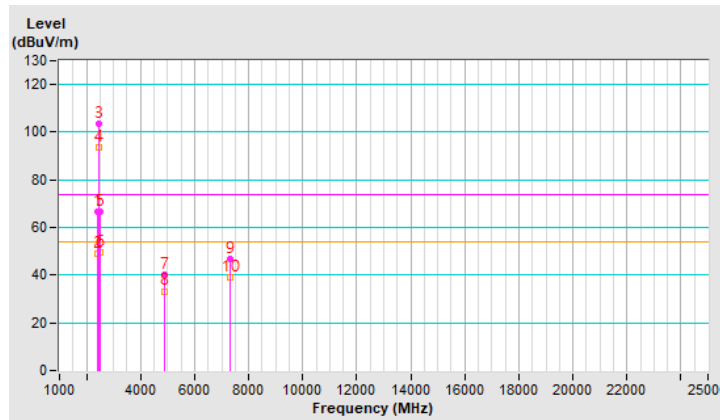


RF Mode	802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	108.7 PK			3.28 H	281	112.0	-3.3
2	*2452.00	96.0 AV			3.28 H	281	99.3	-3.3
3	2483.50	72.0 PK	74.0	-2.0	3.28 H	281	75.4	-3.4
4	2483.50	50.6 AV	54.0	-3.4	3.28 H	281	54.0	-3.4
5	4904.00	40.3 PK	74.0	-33.7	3.24 H	241	39.1	1.2
6	4904.00	30.6 AV	54.0	-23.4	3.24 H	241	29.4	1.2
7	7356.00	43.2 PK	74.0	-30.8	3.20 H	257	36.2	7.0
8	7356.00	33.4 AV	54.0	-20.6	3.20 H	257	26.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

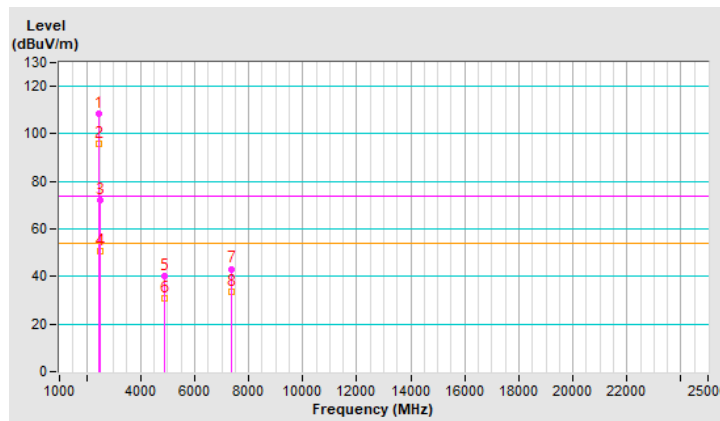


RF Mode	802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	108.1 PK			1.48 V	96	111.4	-3.3
2	*2452.00	94.8 AV			1.48 V	96	98.1	-3.3
3	2483.50	70.8 PK	74.0	-3.2	1.48 V	96	74.2	-3.4
4	2483.50	51.3 AV	54.0	-2.7	1.48 V	96	54.7	-3.4
5	4904.00	40.4 PK	74.0	-33.6	3.23 V	259	39.2	1.2
6	4904.00	34.1 AV	54.0	-19.9	3.23 V	259	32.9	1.2
7	7356.00	46.9 PK	74.0	-27.1	3.63 V	320	39.9	7.0
8	7356.00	39.2 AV	54.0	-14.8	3.63 V	320	32.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

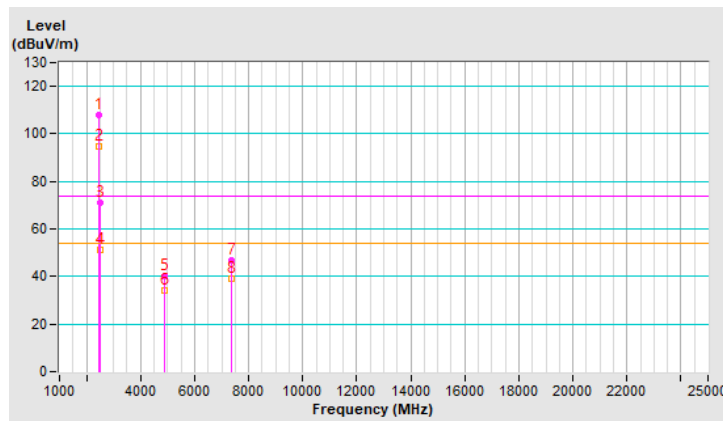


RF Mode	802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	106.0 PK			3.26 H	281	109.4	-3.4
2	*2457.00	93.5 AV			3.26 H	281	96.9	-3.4
3	2483.50	71.6 PK	74.0	-2.4	3.26 H	281	75.0	-3.4
4	2483.50	52.2 AV	54.0	-1.8	3.26 H	281	55.6	-3.4
5	4914.00	40.4 PK	74.0	-33.6	3.31 H	269	39.2	1.2
6	4914.00	30.4 AV	54.0	-23.6	3.31 H	269	29.2	1.2
7	7371.00	42.4 PK	74.0	-31.6	3.15 H	282	35.4	7.0
8	7371.00	32.5 AV	54.0	-21.5	3.15 H	282	25.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

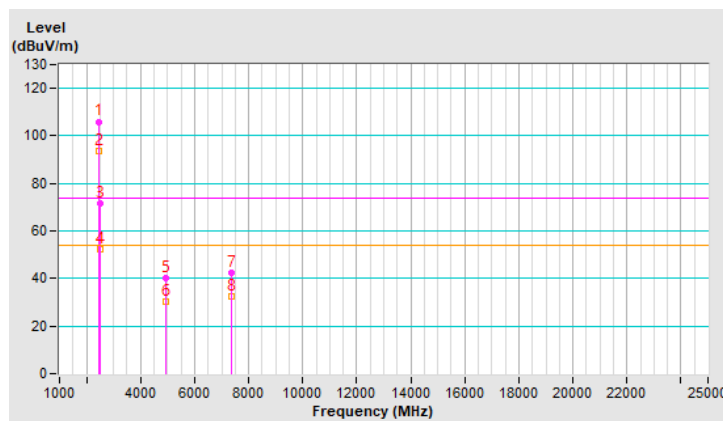


RF Mode	802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	102.4 PK			1.53 V	84	105.8	-3.4
2	*2457.00	92.3 AV			1.53 V	84	95.7	-3.4
3	2483.50	69.1 PK	74.0	-4.9	1.53 V	84	72.5	-3.4
4	2483.50	52.4 AV	54.0	-1.6	1.53 V	84	55.8	-3.4
5	4914.00	40.6 PK	74.0	-33.4	3.14 V	265	39.4	1.2
6	4914.00	34.2 AV	54.0	-19.8	3.14 V	265	33.0	1.2
7	7371.00	47.1 PK	74.0	-26.9	3.61 V	295	40.1	7.0
8	7371.00	39.3 AV	54.0	-14.7	3.61 V	295	32.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

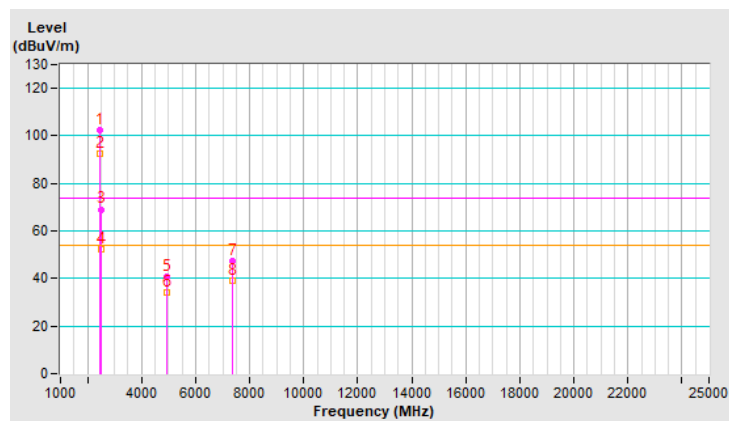


RF Mode	802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.2 PK			3.26 H	281	98.6	-3.4
2	*2462.00	82.8 AV			3.26 H	281	86.2	-3.4
3	2483.50	72.5 PK	74.0	-1.5	3.26 H	281	75.9	-3.4
4	2483.50	48.9 AV	54.0	-5.1	3.26 H	281	52.3	-3.4
5	4924.00	40.1 PK	74.0	-33.9	3.24 H	289	38.9	1.2
6	4924.00	30.4 AV	54.0	-23.6	3.24 H	289	29.2	1.2
7	7386.00	44.1 PK	74.0	-29.9	3.21 H	284	37.1	7.0
8	7386.00	34.3 AV	54.0	-19.7	3.21 H	284	27.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

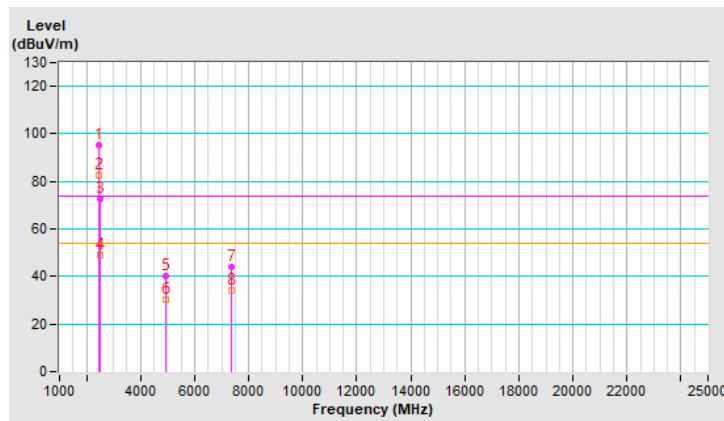


RF Mode	802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	94.3 PK			1.54 V	111	97.7	-3.4
2	*2462.00	84.6 AV			1.54 V	111	88.0	-3.4
3	2483.50	70.2 PK	74.0	-3.8	1.54 V	111	73.6	-3.4
4	2483.50	51.8 AV	54.0	-2.2	1.54 V	111	55.2	-3.4
5	4924.00	40.8 PK	74.0	-33.2	3.20 V	279	39.6	1.2
6	4924.00	34.1 AV	54.0	-19.9	3.20 V	279	32.9	1.2
7	7386.00	46.9 PK	74.0	-27.1	3.62 V	315	39.9	7.0
8	7386.00	39.2 AV	54.0	-14.8	3.62 V	315	32.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

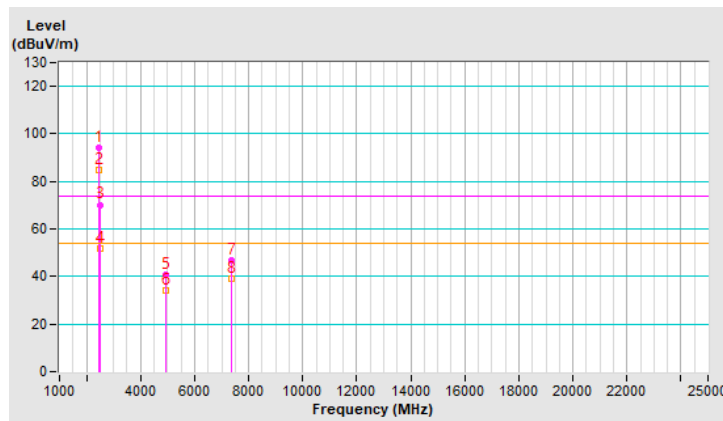


RF Mode	802.11ax (HE) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.7 PK	74.0	-15.3	2.35 H	350	62.1	-3.4
2	2390.00	43.0 AV	54.0	-11.0	2.35 H	350	46.4	-3.4
3	*2412.00	109.9 PK			2.35 H	350	113.3	-3.4
4	*2412.00	99.6 AV			2.35 H	350	103.0	-3.4
5	4824.00	34.2 PK	74.0	-39.8	2.44 H	258	32.9	1.3
6	4824.00	25.4 AV	54.0	-28.6	2.44 H	258	24.1	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

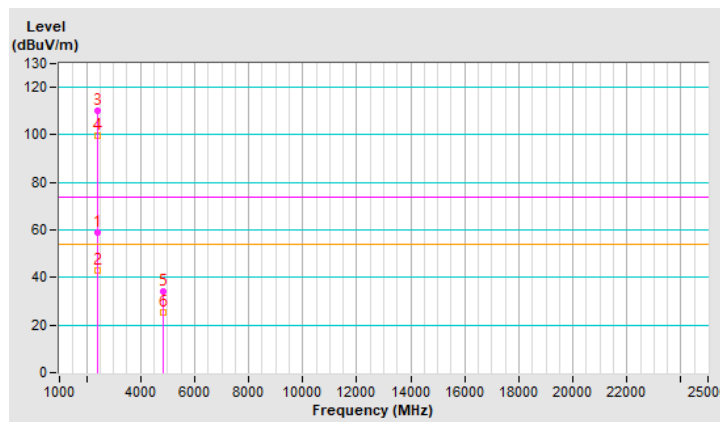


RF Mode	802.11ax (HE) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.0 PK	74.0	-2.0	1.53 V	194	75.4	-3.4
2	2390.00	52.5 AV	54.0	-1.5	1.53 V	194	55.9	-3.4
3	*2412.00	119.8 PK			1.53 V	194	123.2	-3.4
4	*2412.00	110.5 AV			1.53 V	194	113.9	-3.4
5	4824.00	44.3 PK	74.0	-29.7	1.24 V	253	43.0	1.3
6	4824.00	29.2 AV	54.0	-24.8	1.24 V	253	27.9	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

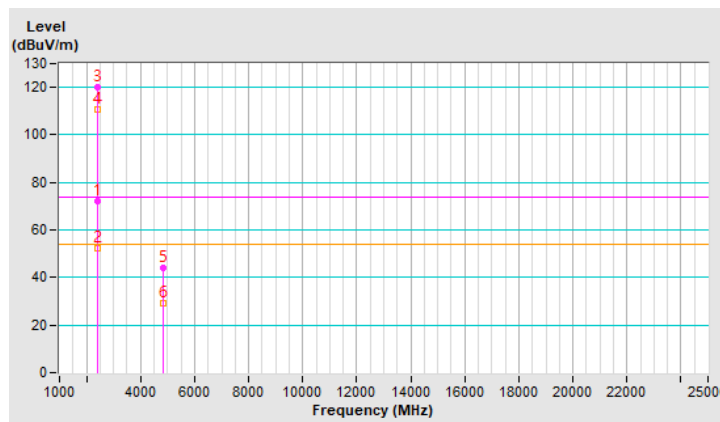


RF Mode	802.11ax (HE) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.7 PK	74.0	-20.3	2.33 H	351	57.1	-3.4
2	2390.00	41.4 AV	54.0	-12.6	2.33 H	351	44.8	-3.4
3	*2437.00	114.3 PK			2.33 H	351	117.7	-3.4
4	*2437.00	103.4 AV			2.33 H	351	106.8	-3.4
5	2483.50	53.3 PK	74.0	-20.7	2.33 H	251	56.7	-3.4
6	2483.50	41.0 AV	54.0	-13.0	2.33 H	251	44.4	-3.4
7	4874.00	38.2 PK	74.0	-35.8	2.41 H	255	36.9	1.3
8	4874.00	29.4 AV	54.0	-24.6	2.41 H	255	28.1	1.3
9	7311.00	37.3 PK	74.0	-36.7	2.41 H	255	30.3	7.0
10	7311.00	28.3 AV	54.0	-25.7	2.41 H	255	21.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

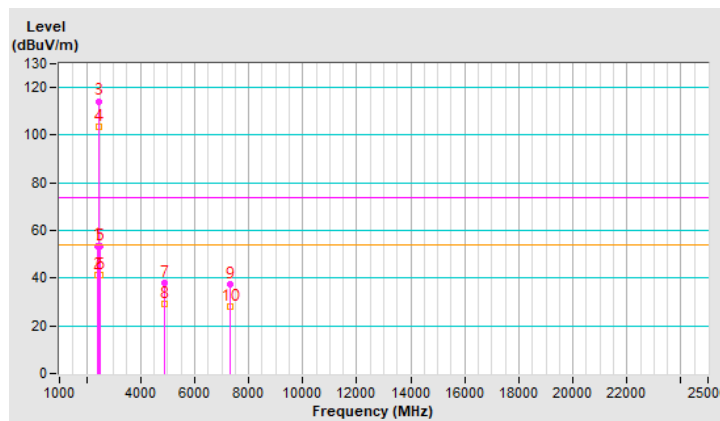


RF Mode	802.11ax (HE) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.6 PK	74.0	-4.4	1.50 V	199	73.0	-3.4
2	2390.00	47.0 AV	54.0	-7.0	1.50 V	199	50.4	-3.4
3	*2437.00	124.3 PK			1.50 V	199	127.7	-3.4
4	*2437.00	113.6 AV			1.50 V	199	117.0	-3.4
5	2483.50	58.6 PK	74.0	-15.4	1.50 V	199	62.0	-3.4
6	2483.50	45.7 AV	54.0	-8.3	1.50 V	199	49.1	-3.4
7	4874.00	48.4 PK	74.0	-25.6	1.23 V	252	47.1	1.3
8	4874.00	33.5 AV	54.0	-20.5	1.23 V	252	32.2	1.3
9	7311.00	47.5 PK	74.0	-26.5	1.20 V	249	40.5	7.0
10	7311.00	32.5 AV	54.0	-21.5	1.20 V	249	25.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

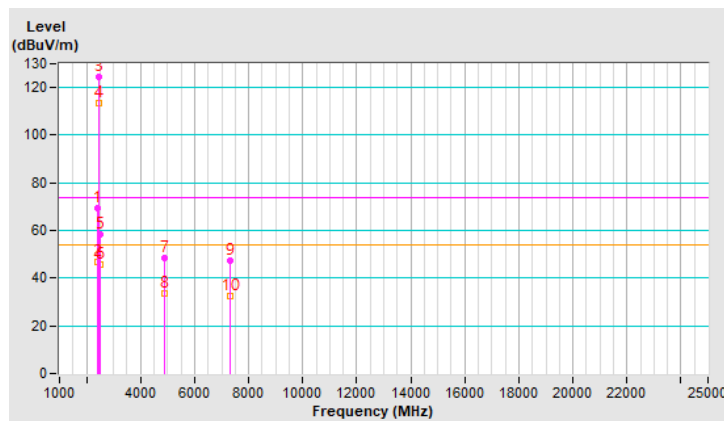


RF Mode	802.11ax (HE) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.3 PK			2.33 H	314	110.7	-3.4
2	*2462.00	97.3 AV			2.33 H	314	100.7	-3.4
3	2483.50	57.5 PK	74.0	-16.5	2.33 H	314	60.9	-3.4
4	2483.50	42.2 AV	54.0	-11.8	2.33 H	314	45.6	-3.4
5	4924.00	33.4 PK	74.0	-40.6	2.41 H	254	32.2	1.2
6	4924.00	24.2 AV	54.0	-29.8	2.41 H	254	23.0	1.2
7	7386.00	33.2 PK	74.0	-40.8	2.52 H	255	26.2	7.0
8	7386.00	24.4 AV	54.0	-29.6	2.52 H	255	17.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

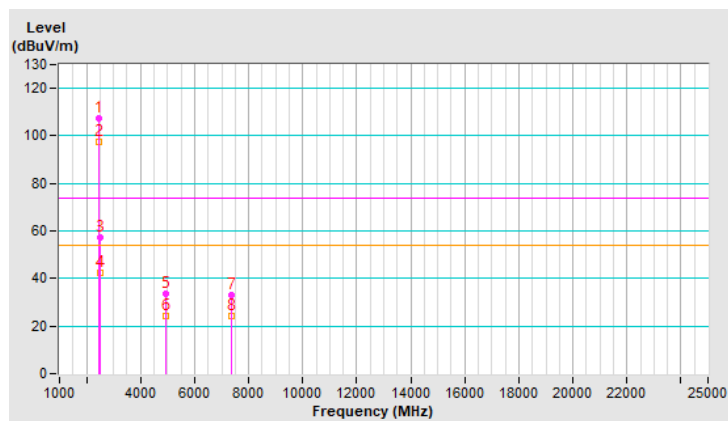


RF Mode	802.11ax (HE) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.0 PK			1.53 V	195	120.4	-3.4
2	*2462.00	107.1 AV			1.53 V	195	110.5	-3.4
3	2483.50	72.3 PK	74.0	-1.7	1.53 V	195	75.7	-3.4
4	2483.50	47.2 AV	54.0	-6.8	1.53 V	195	50.6	-3.4
5	4924.00	43.3 PK	74.0	-30.7	1.22 V	251	42.1	1.2
6	4924.00	28.3 AV	54.0	-25.7	1.22 V	251	27.1	1.2
7	7386.00	43.1 PK	74.0	-30.9	1.20 V	222	36.1	7.0
8	7386.00	28.4 AV	54.0	-25.6	1.20 V	222	21.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

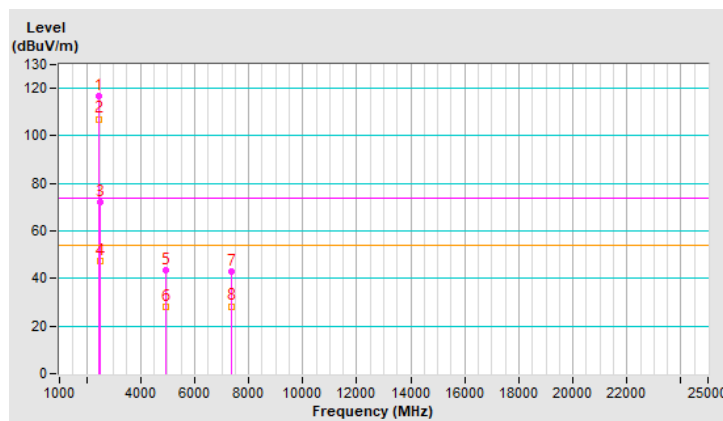


RF Mode	802.11ax (HE) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.3 PK			2.33 H	321	110.7	-3.4
2	*2467.00	97.3 AV			2.33 H	321	100.7	-3.4
3	2483.50	57.3 PK	74.0	-16.7	1.00 H	0	60.7	-3.4
4	2483.50	42.3 AV	54.0	-11.7	1.00 H	0	45.7	-3.4
5	4934.00	33.4 PK	74.0	-40.6	2.44 H	252	32.2	1.2
6	4934.00	24.2 AV	54.0	-29.8	2.44 H	252	23.0	1.2
7	7401.00	33.4 PK	74.0	-40.6	2.41 H	233	26.4	7.0
8	7401.00	24.1 AV	54.0	-29.9	2.41 H	233	17.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

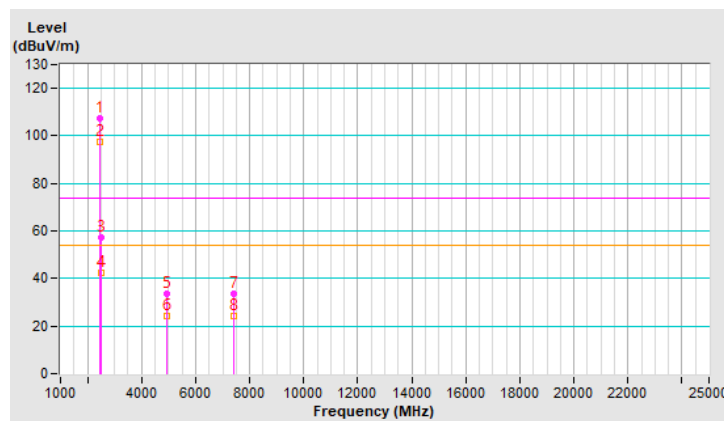


RF Mode	802.11ax (HE) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	117.2 PK			1.55 V	193	120.6	-3.4
2	*2467.00	107.0 AV			1.55 V	193	110.4	-3.4
3	2483.50	72.4 PK	74.0	-1.6	1.55 V	193	75.8	-3.4
4	2483.50	48.8 AV	54.0	-5.2	1.55 V	193	52.2	-3.4
5	4934.00	43.4 PK	74.0	-30.6	1.21 V	252	42.2	1.2
6	4934.00	28.4 AV	54.0	-25.6	1.21 V	252	27.2	1.2
7	7401.00	43.3 PK	74.0	-30.7	1.22 V	214	36.3	7.0
8	7401.00	28.4 AV	54.0	-25.6	1.22 V	214	21.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

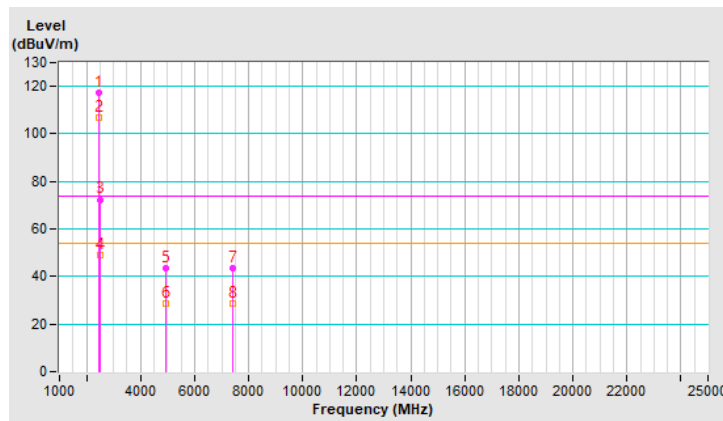


RF Mode	802.11ax (HE) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	101.3 PK			2.31 H	333	104.7	-3.4
2	*2472.00	91.3 AV			2.31 H	333	94.7	-3.4
3	2483.50	53.3 PK	74.0	-20.7	2.31 H	333	56.7	-3.4
4	2483.50	38.2 AV	54.0	-15.8	2.31 H	333	41.6	-3.4
5	4944.00	37.2 PK	74.0	-36.8	2.12 H	252	36.0	1.2
6	4944.00	23.4 AV	54.0	-30.6	2.12 H	252	22.2	1.2
7	7416.00	37.2 PK	74.0	-36.8	2.44 H	231	30.0	7.2
8	7416.00	23.3 AV	54.0	-30.7	2.44 H	231	16.1	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

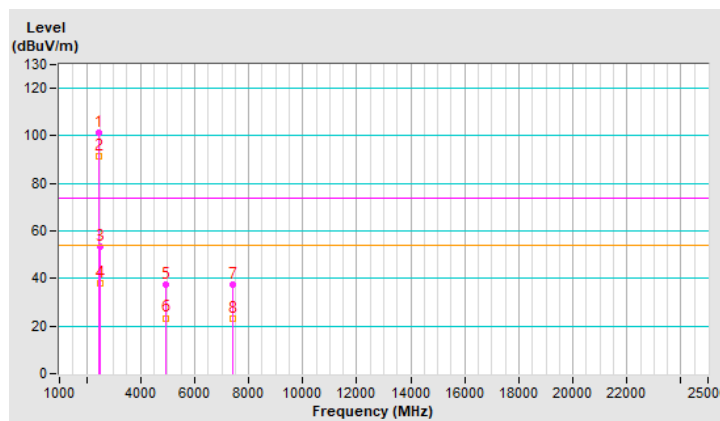


RF Mode	802.11ax (HE) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.6 PK			1.53 V	199	115.0	-3.4
2	*2472.00	101.4 AV			1.53 V	199	104.8	-3.4
3	2483.50	72.5 PK	74.0	-1.5	1.53 V	199	75.9	-3.4
4	2483.50	52.0 AV	54.0	-2.0	1.53 V	199	55.4	-3.4
5	4944.00	37.4 PK	74.0	-36.6	1.21 V	252	36.2	1.2
6	4944.00	24.4 AV	54.0	-29.6	1.21 V	252	23.2	1.2
7	7416.00	37.3 PK	74.0	-36.7	1.22 V	214	30.1	7.2
8	7416.00	24.3 AV	54.0	-29.7	1.22 V	214	17.1	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

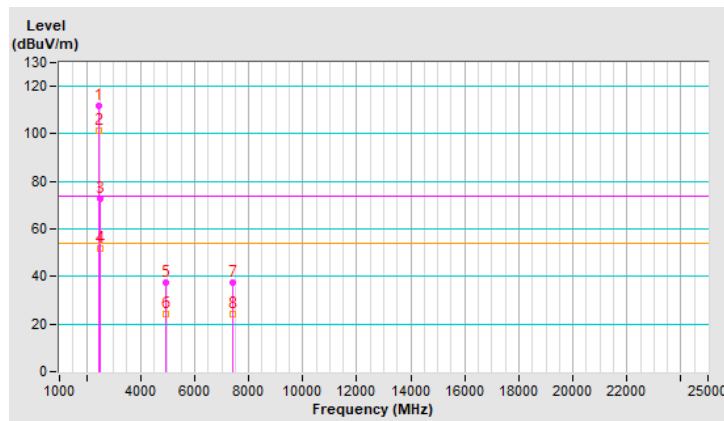


RF Mode	802.11ax (HE) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	2.33 H	341	61.8	-3.4
2	2390.00	43.3 AV	54.0	-10.7	2.33 H	341	46.7	-3.4
3	*2412.00	110.3 PK			2.33 H	341	113.7	-3.4
4	*2412.00	98.4 AV			2.33 H	341	101.8	-3.4
5	4824.00	34.2 PK	74.0	-39.8	2.44 H	258	32.9	1.3
6	4824.00	25.4 AV	54.0	-28.6	2.44 H	258	24.1	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

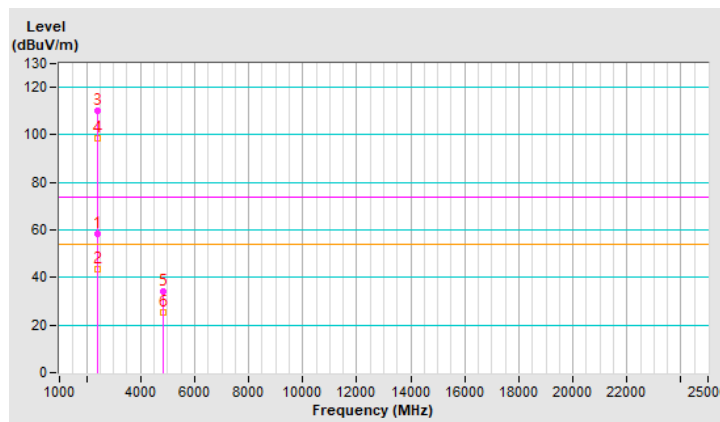


RF Mode	802.11ax (HE) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.3 PK	74.0	-4.7	1.53 V	195	72.7	-3.4
2	2390.00	52.5 AV	54.0	-1.5	1.53 V	195	55.9	-3.4
3	*2412.00	120.0 PK			1.53 V	195	123.4	-3.4
4	*2412.00	108.5 AV			1.53 V	195	111.9	-3.4
5	4824.00	44.2 PK	74.0	-29.8	1.21 V	252	42.9	1.3
6	4824.00	29.4 AV	54.0	-24.6	1.21 V	252	28.1	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

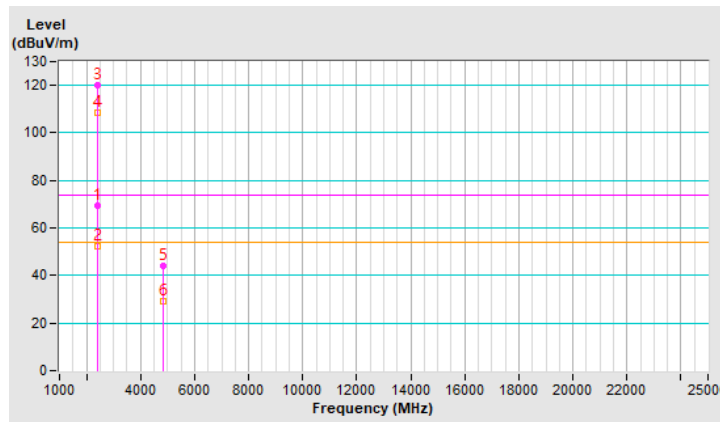


RF Mode	802.11ax (HE) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.4 PK	74.0	-20.6	2.33 H	351	56.8	-3.4
2	2390.00	41.2 AV	54.0	-12.8	2.33 H	351	44.6	-3.4
3	*2437.00	113.3 PK			2.33 H	351	116.7	-3.4
4	*2437.00	102.3 AV			2.33 H	351	105.7	-3.4
5	2483.50	53.3 PK	74.0	-20.7	2.33 H	251	56.7	-3.4
6	2483.50	41.1 AV	54.0	-12.9	2.33 H	251	44.5	-3.4
7	4874.00	38.2 PK	74.0	-35.8	2.41 H	255	36.9	1.3
8	4874.00	29.4 AV	54.0	-24.6	2.41 H	255	28.1	1.3
9	7311.00	37.3 PK	74.0	-36.7	2.41 H	255	30.3	7.0
10	7311.00	29.0 AV	54.0	-25.0	2.41 H	255	22.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

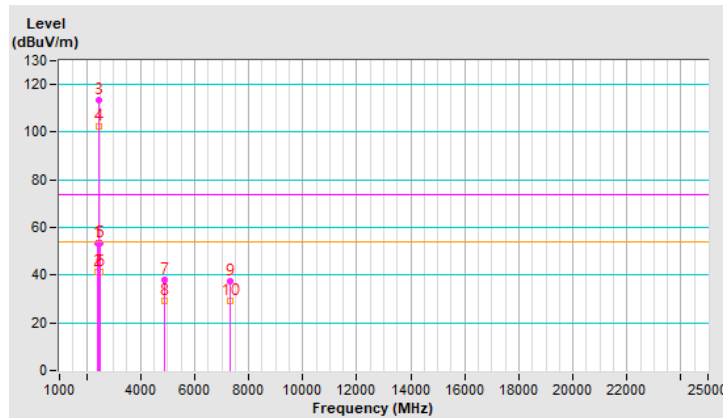


RF Mode	802.11ax (HE) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.8 PK	74.0	-8.2	1.53 V	194	69.2	-3.4
2	2390.00	49.3 AV	54.0	-4.7	1.53 V	194	52.7	-3.4
3	*2437.00	122.6 PK			1.53 V	194	126.0	-3.4
4	*2437.00	112.1 AV			1.53 V	194	115.5	-3.4
5	2483.50	58.4 PK	74.0	-15.6	1.53 V	194	61.8	-3.4
6	2483.50	46.6 AV	54.0	-7.4	1.53 V	194	50.0	-3.4
7	4874.00	48.4 PK	74.0	-25.6	1.23 V	252	47.1	1.3
8	4874.00	33.5 AV	54.0	-20.5	1.23 V	252	32.2	1.3
9	7311.00	47.5 PK	74.0	-26.5	1.20 V	249	40.5	7.0
10	7311.00	32.5 AV	54.0	-21.5	1.20 V	249	25.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

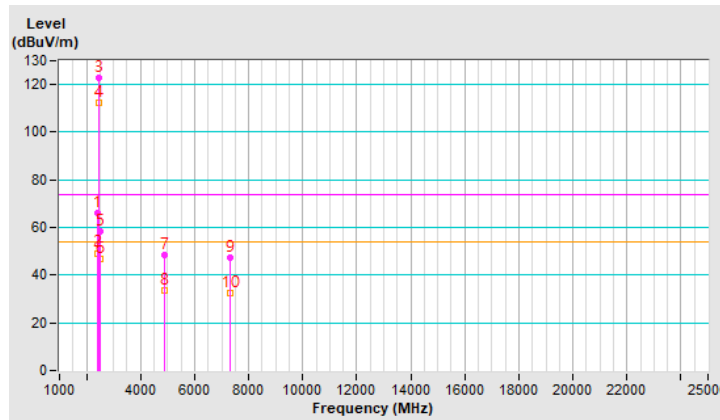


RF Mode	802.11ax (HE) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.3 PK			2.23 H	341	111.7	-3.4
2	*2462.00	98.4 AV			2.23 H	341	101.8	-3.4
3	2483.50	51.3 PK	74.0	-22.7	2.23 H	341	54.7	-3.4
4	2483.50	41.2 AV	54.0	-12.8	2.23 H	341	44.6	-3.4
5	4924.00	36.3 PK	74.0	-37.7	2.42 H	241	35.1	1.2
6	4924.00	25.3 AV	54.0	-28.7	2.42 H	241	24.1	1.2
7	7386.00	35.3 PK	74.0	-38.7	2.44 H	252	28.3	7.0
8	7386.00	26.4 AV	54.0	-27.6	2.44 H	252	19.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

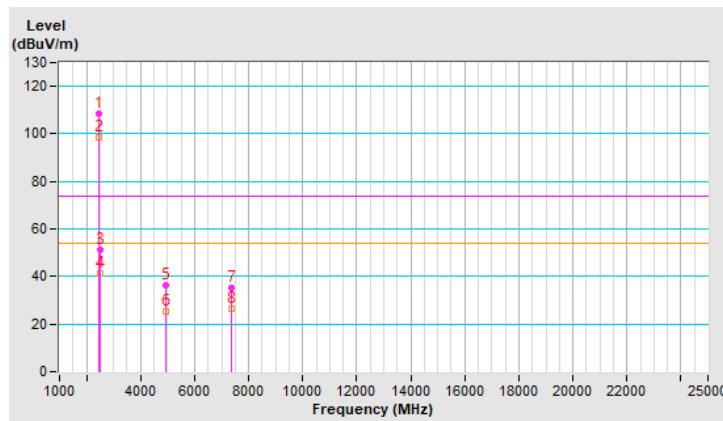


RF Mode	802.11ax (HE) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.0 PK			1.53 V	199	121.4	-3.4
2	*2462.00	107.2 AV			1.53 V	199	110.6	-3.4
3	2483.50	72.5 PK	74.0	-1.5	1.53 V	199	75.9	-3.4
4	2483.50	51.5 AV	54.0	-2.5	1.53 V	199	54.9	-3.4
5	4924.00	46.4 PK	74.0	-27.6	1.23 V	254	45.2	1.2
6	4924.00	31.2 AV	54.0	-22.8	1.23 V	254	30.0	1.2
7	7386.00	45.4 PK	74.0	-28.6	1.22 V	245	38.4	7.0
8	7386.00	30.2 AV	54.0	-23.8	1.22 V	245	23.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

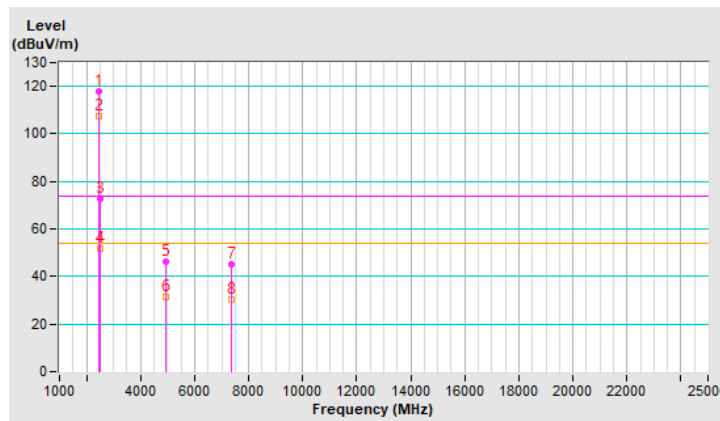


RF Mode	802.11ax (HE) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.3 PK			2.33 H	314	110.7	-3.4
2	*2467.00	97.3 AV			2.33 H	314	100.7	-3.4
3	2483.50	57.5 PK	74.0	-16.5	2.33 H	314	60.9	-3.4
4	2483.50	42.2 AV	54.0	-11.8	2.33 H	314	45.6	-3.4
5	4934.00	33.4 PK	74.0	-40.6	2.41 H	254	32.2	1.2
6	4934.00	24.2 AV	54.0	-29.8	2.41 H	254	23.0	1.2
7	7401.00	33.2 PK	74.0	-40.8	2.52 H	255	26.2	7.0
8	7401.00	24.4 AV	54.0	-29.6	2.52 H	255	17.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

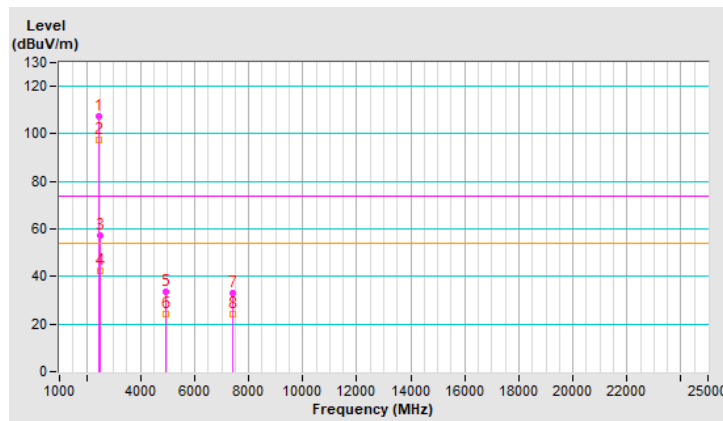


RF Mode	802.11ax (HE) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	117.7 PK			1.53 V	194	121.1	-3.4
2	*2467.00	107.6 AV			1.53 V	194	111.0	-3.4
3	2483.50	72.4 PK	74.0	-1.6	1.53 V	194	75.8	-3.4
4	2483.50	50.4 AV	54.0	-3.6	1.53 V	194	53.8	-3.4
5	4934.00	43.3 PK	74.0	-30.7	1.22 V	251	42.1	1.2
6	4934.00	28.3 AV	54.0	-25.7	1.22 V	251	27.1	1.2
7	7401.00	43.1 PK	74.0	-30.9	1.20 V	222	36.1	7.0
8	7401.00	28.4 AV	54.0	-25.6	1.20 V	222	21.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

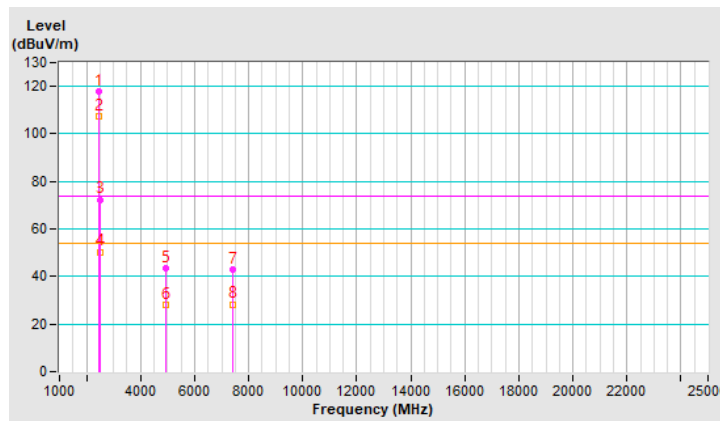


RF Mode	802.11ax (HE) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	96.7 PK			2.31 H	333	100.1	-3.4
2	*2472.00	87.2 AV			2.31 H	333	90.6	-3.4
3	2483.50	53.3 PK	74.0	-20.7	2.31 H	333	56.7	-3.4
4	2483.50	38.2 AV	54.0	-15.8	2.31 H	333	41.6	-3.4
5	4944.00	37.2 PK	74.0	-36.8	2.12 H	252	36.0	1.2
6	4944.00	23.4 AV	54.0	-30.6	2.12 H	252	22.2	1.2
7	7416.00	37.2 PK	74.0	-36.8	2.44 H	231	30.0	7.2
8	7416.00	23.3 AV	54.0	-30.7	2.44 H	231	16.1	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

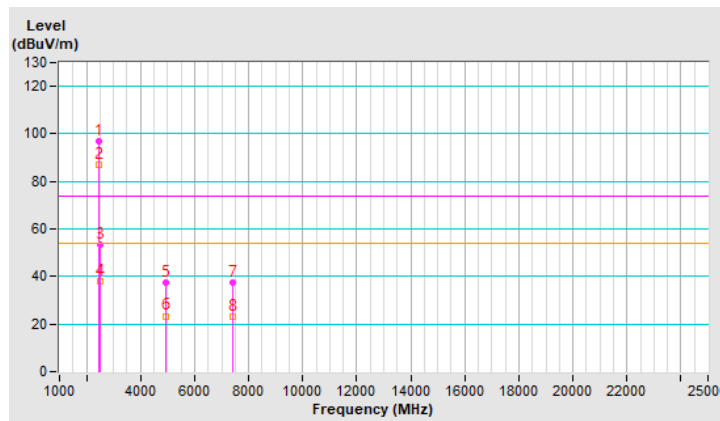


RF Mode	802.11ax (HE) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.2 PK			1.53 V	195	114.6	-3.4
2	*2472.00	101.6 AV			1.53 V	195	105.0	-3.4
3	2483.50	68.5 PK	74.0	-5.5	1.53 V	195	71.9	-3.4
4	2483.50	52.5 AV	54.0	-1.5	1.53 V	195	55.9	-3.4
5	4944.00	37.4 PK	74.0	-36.6	1.21 V	252	36.2	1.2
6	4944.00	24.4 AV	54.0	-29.6	1.21 V	252	23.2	1.2
7	7416.00	37.3 PK	74.0	-36.7	1.22 V	214	30.1	7.2
8	7416.00	24.3 AV	54.0	-29.7	1.22 V	214	17.1	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

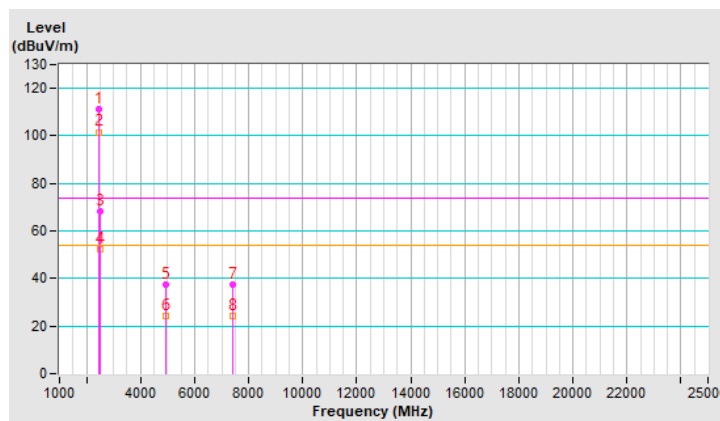


RF Mode	802.11ax (HE) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.3 PK	74.0	-17.7	2.35 H	350	59.7	-3.4
2	2390.00	41.3 AV	54.0	-12.7	2.35 H	350	44.7	-3.4
3	*2412.00	106.4 PK			2.35 H	350	109.8	-3.4
4	*2412.00	95.3 AV			2.35 H	350	98.7	-3.4
5	4824.00	34.2 PK	74.0	-39.8	2.44 H	258	32.9	1.3
6	4824.00	25.4 AV	54.0	-28.6	2.44 H	258	24.1	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

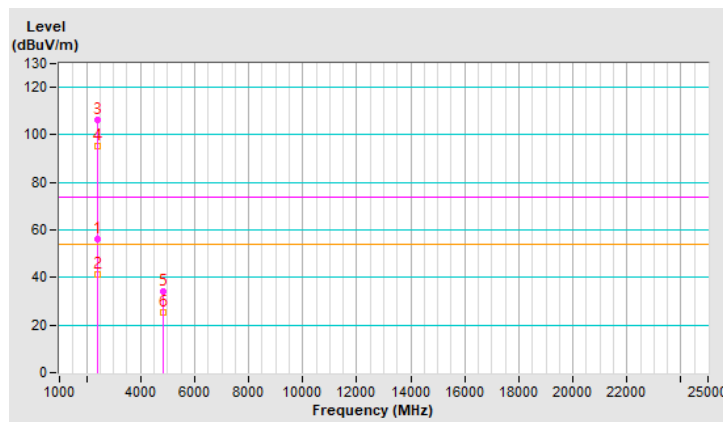


RF Mode	802.11ax (HE) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.53 V	194	68.7	-3.4
2	2390.00	52.4 AV	54.0	-1.6	1.53 V	194	55.8	-3.4
3	*2412.00	116.7 PK			1.53 V	194	120.1	-3.4
4	*2412.00	105.8 AV			1.53 V	194	109.2	-3.4
5	4824.00	44.2 PK	74.0	-29.8	1.21 V	252	42.9	1.3
6	4824.00	29.4 AV	54.0	-24.6	1.21 V	252	28.1	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

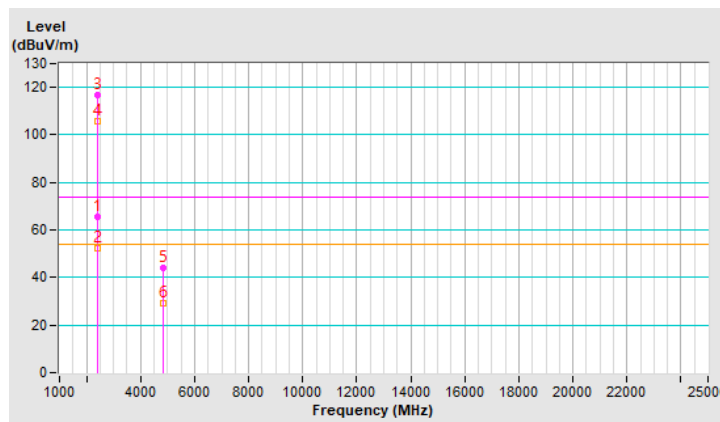


RF Mode	802.11ax (HE) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.3 PK	74.0	-20.7	2.33 H	351	56.7	-3.4
2	2390.00	41.3 AV	54.0	-12.7	2.33 H	351	44.7	-3.4
3	*2437.00	111.4 PK			2.33 H	351	114.8	-3.4
4	*2437.00	99.4 AV			2.33 H	351	102.8	-3.4
5	2483.50	53.3 PK	74.0	-20.7	2.33 H	251	56.7	-3.4
6	2483.50	41.1 AV	54.0	-12.9	2.33 H	251	44.5	-3.4
7	4874.00	38.2 PK	74.0	-35.8	2.41 H	255	36.9	1.3
8	4874.00	29.4 AV	54.0	-24.6	2.41 H	255	28.1	1.3
9	7311.00	37.3 PK	74.0	-36.7	2.41 H	255	30.3	7.0
10	7311.00	28.3 AV	54.0	-25.7	2.41 H	255	21.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

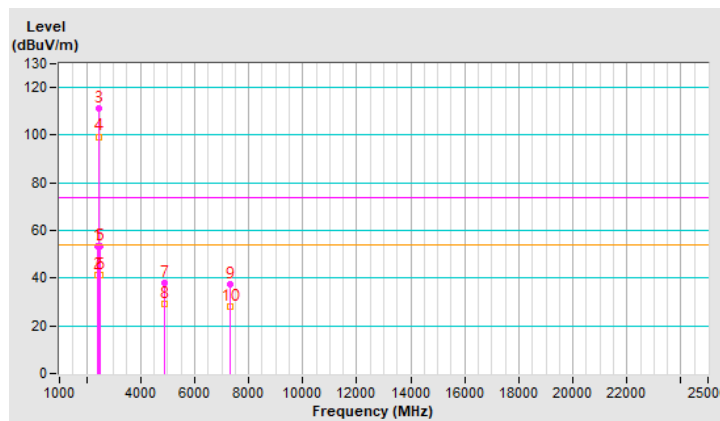


RF Mode	802.11ax (HE) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.3 PK	74.0	-10.7	1.53 V	194	66.7	-3.4
2	2390.00	50.6 AV	54.0	-3.4	1.53 V	194	54.0	-3.4
3	*2437.00	121.4 PK			1.53 V	194	124.8	-3.4
4	*2437.00	109.0 AV			1.53 V	194	112.4	-3.4
5	2483.50	66.4 PK	74.0	-7.6	1.53 V	194	69.8	-3.4
6	2483.50	51.4 AV	54.0	-2.6	1.53 V	194	54.8	-3.4
7	4874.00	48.4 PK	74.0	-25.6	1.23 V	252	47.1	1.3
8	4874.00	33.5 AV	54.0	-20.5	1.23 V	252	32.2	1.3
9	7311.00	47.5 PK	74.0	-26.5	1.20 V	249	40.5	7.0
10	7311.00	32.5 AV	54.0	-21.5	1.20 V	249	25.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

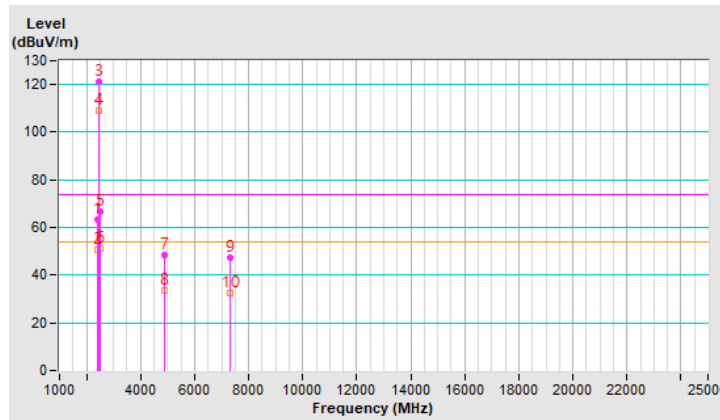

RF Mode	802.11ax (HE) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.4 PK			2.34 H	352	110.8	-3.4
2	*2462.00	95.4 AV			2.34 H	352	98.8	-3.4
3	2483.50	51.3 PK	74.0	-22.7	2.34 H	352	54.7	-3.4
4	2483.50	41.2 AV	54.0	-12.8	2.34 H	352	44.6	-3.4
5	4924.00	34.3 PK	74.0	-39.7	2.41 H	225	33.1	1.2
6	4924.00	27.4 AV	54.0	-26.6	2.41 H	225	26.2	1.2
7	7386.00	33.4 PK	74.0	-40.6	2.44 H	245	26.4	7.0
8	7386.00	25.4 AV	54.0	-28.6	2.44 H	245	18.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

