


<b>RF Mode</b>	802.11ax (HE) 52-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.2 PK			1.16 H	222	115.6	-3.4
2	*2467.00	101.4 AV			1.16 H	222	104.8	-3.4
3	2483.50	72.3 PK	74.0	-1.7	1.16 H	222	75.7	-3.4
4	2483.50	48.2 AV	54.0	-5.8	1.16 H	222	51.6	-3.4
5	4934.00	43.4 PK	74.0	-30.6	1.69 H	352	42.2	1.2
6	4934.00	26.2 AV	54.0	-27.8	1.69 H	352	25.0	1.2
7	7401.00	44.3 PK	74.0	-29.7	1.66 H	352	37.3	7.0
8	7401.00	34.2 AV	54.0	-19.8	1.66 H	352	27.2	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

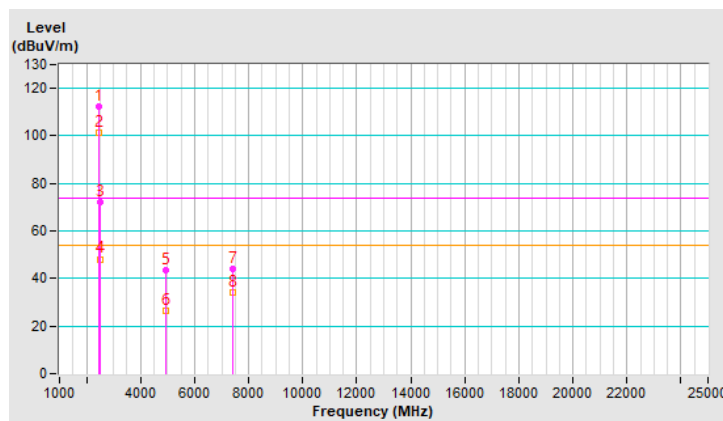


<b>RF Mode</b>	802.11ax (HE) 52-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.4 PK			2.23 V	154	114.8	-3.4
2	*2467.00	101.2 AV			2.23 V	154	104.6	-3.4
3	2483.50	69.6 PK	74.0	-4.4	2.23 V	154	73.0	-3.4
4	2483.50	48.1 AV	54.0	-5.9	2.23 V	154	51.5	-3.4
5	4934.00	44.2 PK	74.0	-29.8	1.55 V	252	43.0	1.2
6	4934.00	27.2 AV	54.0	-26.8	1.55 V	252	26.0	1.2
7	7401.00	45.3 PK	74.0	-28.7	1.54 V	341	38.3	7.0
8	7401.00	35.4 AV	54.0	-18.6	1.54 V	341	28.4	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

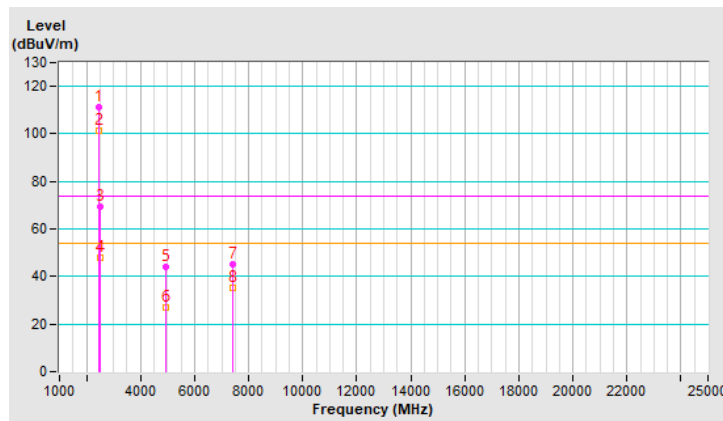


<b>RF Mode</b>	802.11ax (HE) 52-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.7 PK			1.12 H	245	113.1	-3.4
2	*2472.00	99.0 AV			1.12 H	245	102.4	-3.4
3	2483.50	69.7 PK	74.0	-4.3	1.12 H	245	73.1	-3.4
<b>4</b>	<b>2483.50</b>	<b>52.5 AV</b>	<b>54.0</b>	<b>-1.5</b>	<b>1.12 H</b>	<b>245</b>	<b>55.9</b>	<b>-3.4</b>
5	4944.00	39.4 PK	74.0	-34.6	1.62 H	352	38.2	1.2
6	4944.00	23.3 AV	54.0	-30.7	1.62 H	352	22.1	1.2
7	7416.00	41.5 PK	74.0	-32.5	1.63 H	333	34.3	7.2
8	7416.00	30.4 AV	54.0	-23.6	1.63 H	333	23.2	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

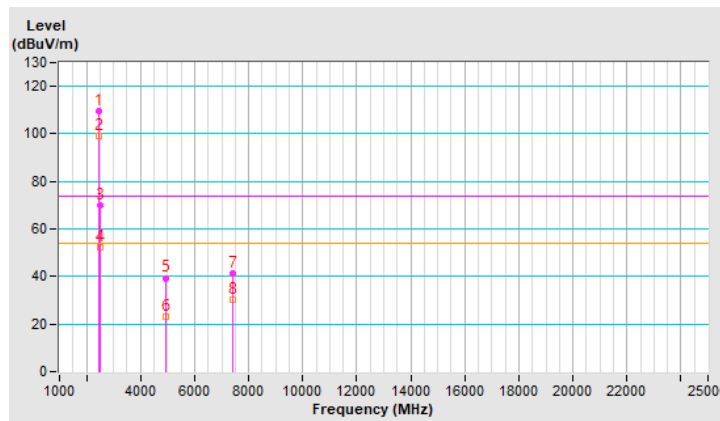


<b>RF Mode</b>	802.11ax (HE) 52-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.4 PK			2.23 V	146	110.8	-3.4
2	*2472.00	97.4 AV			2.23 V	146	100.8	-3.4
3	2483.50	68.3 PK	74.0	-5.7	2.23 V	146	71.7	-3.4
4	2483.50	51.9 AV	54.0	-2.1	2.23 V	146	55.3	-3.4
5	4944.00	40.3 PK	74.0	-33.7	1.66 V	352	39.1	1.2
6	4944.00	24.2 AV	54.0	-29.8	1.66 V	352	23.0	1.2
7	7416.00	42.3 PK	74.0	-31.7	1.52 V	345	35.1	7.2
8	7416.00	31.3 AV	54.0	-22.7	1.52 V	345	24.1	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

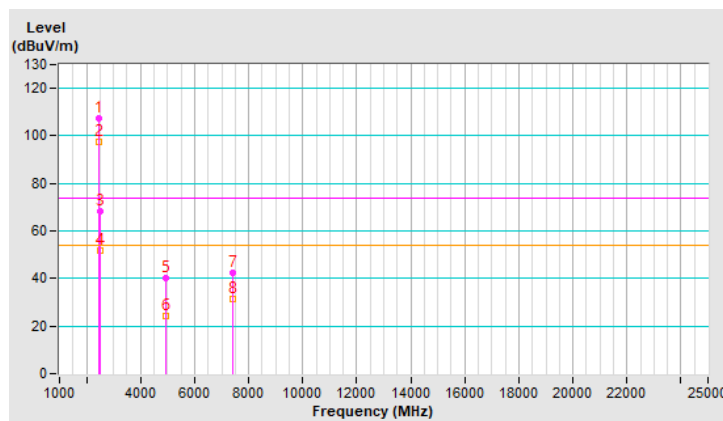


<b>RF Mode</b>	802.11ax (HE) 106-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.2 PK	74.0	-1.8	1.13 H	252	75.6	-3.4
2	2390.00	51.8 AV	54.0	-2.2	1.13 H	252	55.2	-3.4
3	*2412.00	112.5 PK			1.13 H	252	115.9	-3.4
4	*2412.00	100.5 AV			1.13 H	252	103.9	-3.4
5	4824.00	44.3 PK	74.0	-29.7	1.63 H	355	43.0	1.3
6	4824.00	27.2 AV	54.0	-26.8	1.63 H	355	25.9	1.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

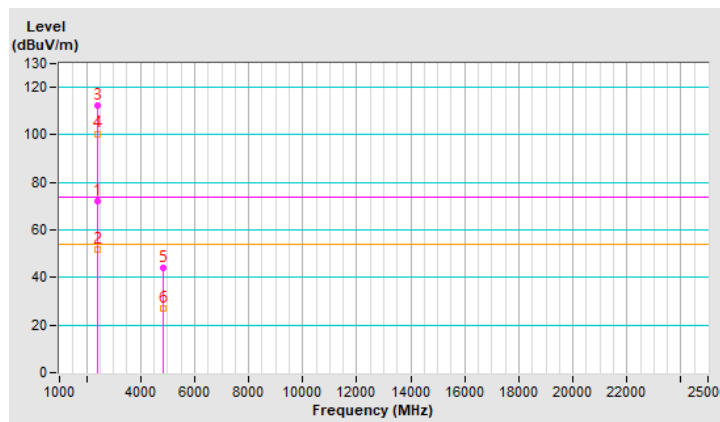


<b>RF Mode</b>	802.11ax (HE) 106-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.6 PK	74.0	-4.4	2.25 V	154	73.0	-3.4
2	2390.00	50.4 AV	54.0	-3.6	2.25 V	154	53.8	-3.4
3	*2412.00	111.4 PK			2.25 V	154	114.8	-3.4
4	*2412.00	100.4 AV			2.25 V	154	103.8	-3.4
5	4824.00	45.3 PK	74.0	-28.7	1.55 V	353	44.0	1.3
6	4824.00	28.4 AV	54.0	-25.6	1.55 V	353	27.1	1.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

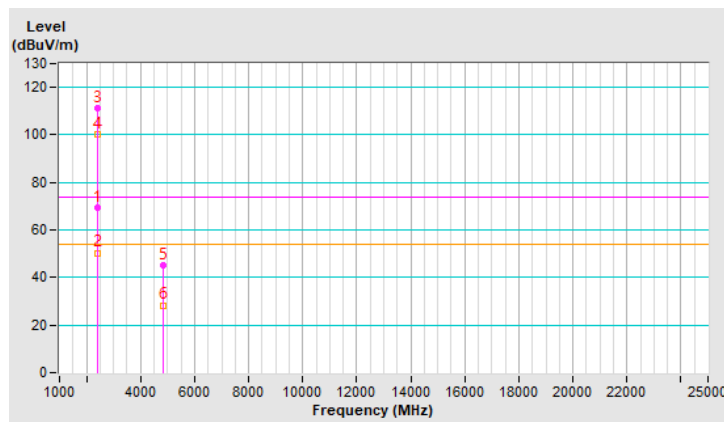


<b>RF Mode</b>	802.11ax (HE) 106-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.4 PK	74.0	-14.6	1.15 H	263	62.8	-3.4
2	2390.00	44.4 AV	54.0	-9.6	1.15 H	263	47.8	-3.4
3	*2437.00	113.7 PK			1.15 H	263	117.1	-3.4
4	*2437.00	103.2 AV			1.15 H	263	106.6	-3.4
5	2483.50	60.4 PK	74.0	-13.6	1.15 H	263	63.8	-3.4
6	2483.50	44.2 AV	54.0	-9.8	1.15 H	263	47.6	-3.4
7	4874.00	45.4 PK	74.0	-28.6	1.62 H	334	44.1	1.3
8	4874.00	28.3 AV	54.0	-25.7	1.62 H	334	27.0	1.3
9	7311.00	46.5 PK	74.0	-27.5	1.66 H	341	39.5	7.0
10	7311.00	36.4 AV	54.0	-17.6	1.66 H	341	29.4	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

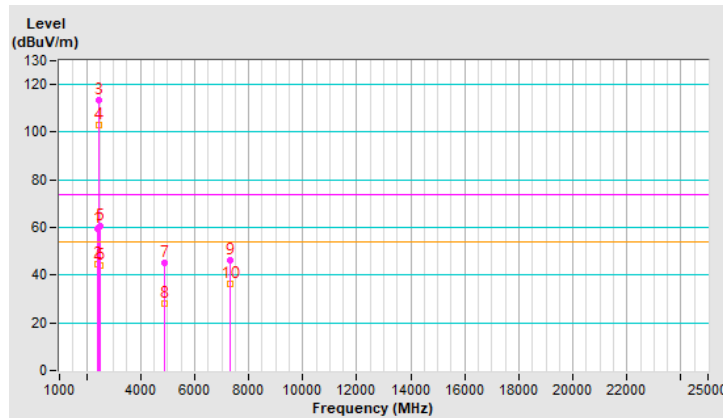


<b>RF Mode</b>	802.11ax (HE) 106-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.5 PK	74.0	-15.5	2.24 V	141	61.9	-3.4
2	2390.00	43.4 AV	54.0	-10.6	2.24 V	141	46.8	-3.4
3	*2437.00	112.2 PK			2.24 V	141	115.6	-3.4
4	*2437.00	102.3 AV			2.24 V	141	105.7	-3.4
5	2483.50	59.4 PK	74.0	-14.6	2.24 V	141	62.8	-3.4
6	2483.50	43.4 AV	54.0	-10.6	2.24 V	141	46.8	-3.4
7	4874.00	46.3 PK	74.0	-27.7	1.54 V	345	45.0	1.3
8	4874.00	29.2 AV	54.0	-24.8	1.54 V	345	27.9	1.3
9	7311.00	47.2 PK	74.0	-26.8	1.55 V	345	40.2	7.0
10	7311.00	37.3 AV	54.0	-16.7	1.55 V	345	30.3	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

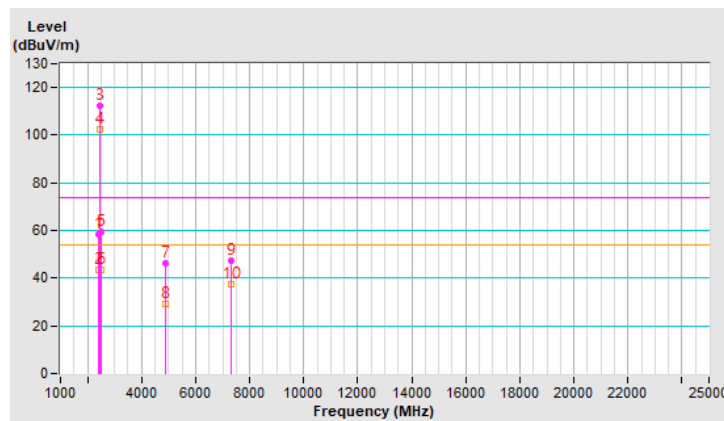




<b>RF Mode</b>	802.11ax (HE) 106-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.5 PK			1.13 H	254	112.9	-3.4
2	*2462.00	99.2 AV			1.13 H	254	102.6	-3.4
3	2483.50	72.4 PK	74.0	-1.6	1.13 H	254	75.8	-3.4
4	2483.50	50.5 AV	54.0	-3.5	1.13 H	254	53.9	-3.4
5	4924.00	43.2 PK	74.0	-30.8	1.66 H	336	42.0	1.2
6	4924.00	26.4 AV	54.0	-27.6	1.66 H	336	25.2	1.2
7	7386.00	44.6 PK	74.0	-29.4	1.65 H	341	37.6	7.0
8	7386.00	34.4 AV	54.0	-19.6	1.65 H	341	27.4	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

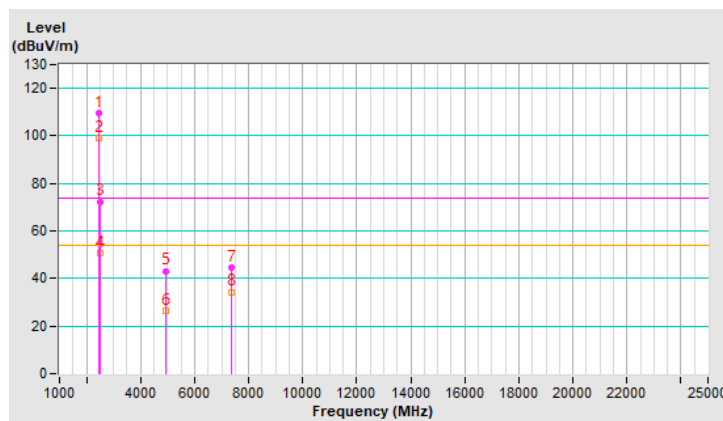


<b>RF Mode</b>	802.11ax (HE) 106-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.4 PK			2.25 V	148	111.8	-3.4
2	*2462.00	98.4 AV			2.25 V	148	101.8	-3.4
3	2483.50	70.3 PK	74.0	-3.7	2.25 V	148	73.7	-3.4
4	2483.50	49.7 AV	54.0	-4.3	2.25 V	148	53.1	-3.4
5	4924.00	44.3 PK	74.0	-29.7	1.58 V	345	43.1	1.2
6	4924.00	27.3 AV	54.0	-26.7	1.58 V	345	26.1	1.2
7	7386.00	45.6 PK	74.0	-28.4	1.55 V	352	38.6	7.0
8	7386.00	35.2 AV	54.0	-18.8	1.55 V	352	28.2	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

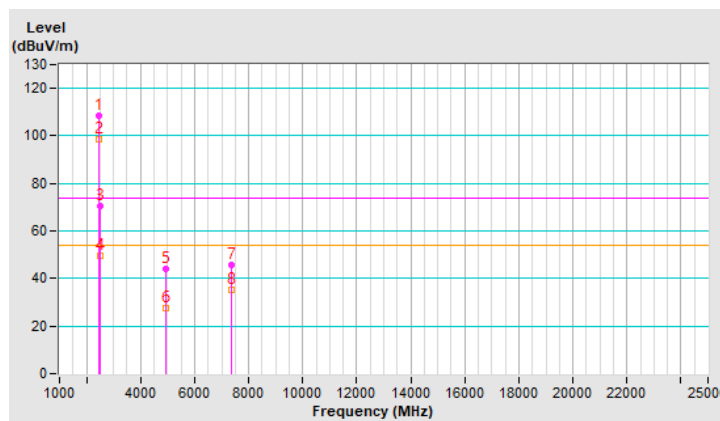


<b>RF Mode</b>	802.11ax (HE) 106-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.4 PK			1.13 H	252	111.8	-3.4
2	*2467.00	98.5 AV			1.13 H	252	101.9	-3.4
3	2483.50	72.1 PK	74.0	-1.9	1.13 H	252	75.5	-3.4
4	2483.50	51.2 AV	54.0	-2.8	1.13 H	252	54.6	-3.4
5	4934.00	43.3 PK	74.0	-30.7	1.64 H	335	42.1	1.2
6	4934.00	26.5 AV	54.0	-27.5	1.64 H	335	25.3	1.2
7	7401.00	44.3 PK	74.0	-29.7	1.68 H	352	37.3	7.0
8	7401.00	34.2 AV	54.0	-19.8	1.68 H	352	27.2	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

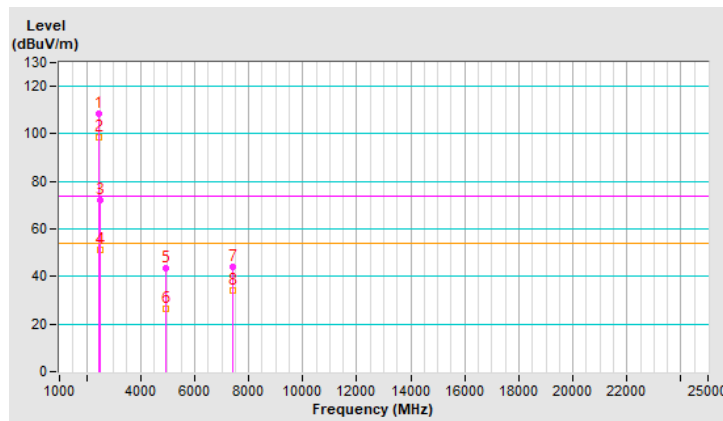


<b>RF Mode</b>	802.11ax (HE) 106-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.6 PK			2.23 V	152	111.0	-3.4
2	*2467.00	97.4 AV			2.23 V	152	100.8	-3.4
3	2483.50	71.4 PK	74.0	-2.6	2.23 V	152	74.8	-3.4
4	2483.50	50.9 AV	54.0	-3.1	2.23 V	152	54.3	-3.4
5	4934.00	44.3 PK	74.0	-29.7	1.58 V	334	43.1	1.2
6	4934.00	27.6 AV	54.0	-26.4	1.58 V	334	26.4	1.2
7	7401.00	45.4 PK	74.0	-28.6	1.55 V	337	38.4	7.0
8	7401.00	35.4 AV	54.0	-18.6	1.55 V	337	28.4	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

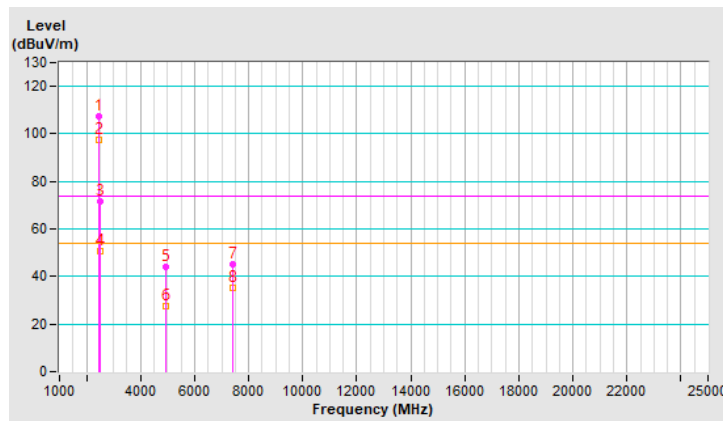


<b>RF Mode</b>	802.11ax (HE) 106-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.8 PK			1.16 H	245	113.2	-3.4
2	*2472.00	100.0 AV			1.16 H	245	103.4	-3.4
3	2483.50	68.9 PK	74.0	-5.1	1.16 H	245	72.3	-3.4
4	2483.50	52.2 AV	54.0	-1.8	1.16 H	245	55.6	-3.4
5	4944.00	42.3 PK	74.0	-31.7	1.66 H	325	41.1	1.2
6	4944.00	25.3 AV	54.0	-28.7	1.66 H	325	24.1	1.2
7	7416.00	43.3 PK	74.0	-30.7	1.66 H	333	36.1	7.2
8	7416.00	33.2 AV	54.0	-20.8	1.66 H	333	26.0	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

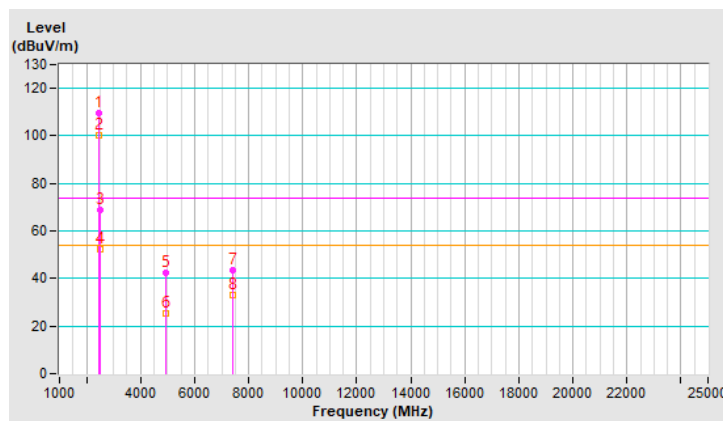


<b>RF Mode</b>	802.11ax (HE) 106-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	108.4 PK			2.24 V	145	111.8	-3.4
2	*2472.00	98.3 AV			2.24 V	145	101.7	-3.4
3	2483.50	68.4 PK	74.0	-5.6	2.24 V	145	71.8	-3.4
4	2483.50	52.1 AV	54.0	-1.9	2.24 V	145	55.5	-3.4
5	4944.00	43.3 PK	74.0	-30.7	1.54 V	352	42.1	1.2
6	4944.00	25.3 AV	54.0	-28.7	1.54 V	352	24.1	1.2
7	7416.00	44.4 PK	74.0	-29.6	1.55 V	334	37.2	7.2
8	7416.00	34.2 AV	54.0	-19.8	1.55 V	334	27.0	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

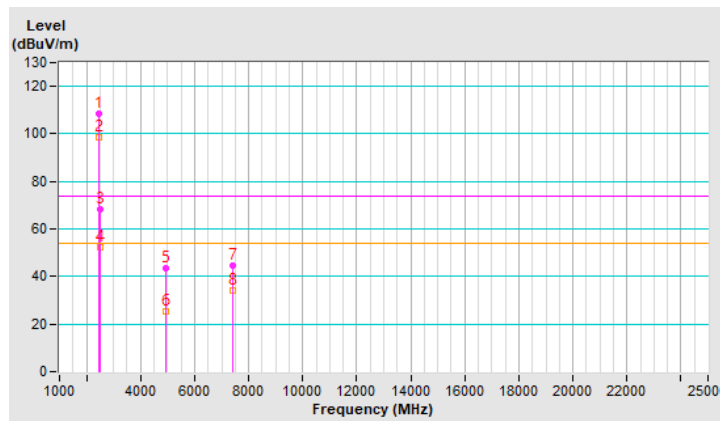


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	88.7 PK			3.02 V	26	92.1	-3.4
2	*2462.00	76.3 AV			3.02 V	26	79.7	-3.4
3	2483.50	69.2 PK	74.0	-4.8	3.02 V	26	72.6	-3.4
4	2483.50	45.7 AV	54.0	-8.3	3.02 V	26	49.1	-3.4
5	4924.00	39.7 PK	74.0	-34.3	3.12 V	302	38.5	1.2
6	4924.00	30.1 AV	54.0	-23.9	3.12 V	302	28.9	1.2
7	7386.00	41.8 PK	74.0	-32.2	3.67 V	303	34.8	7.0
8	7386.00	33.5 AV	54.0	-20.5	3.67 V	303	26.5	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

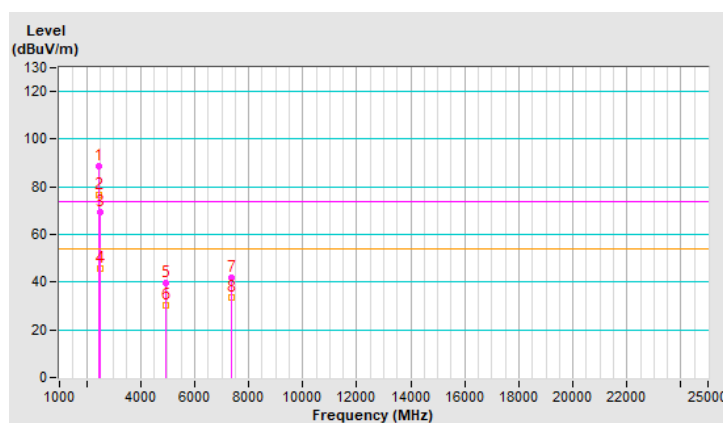

## Mode C


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	2.19 H	194	63.5	-3.4
2	2390.00	52.2 AV	54.0	-1.8	2.19 H	194	55.6	-3.4
3	*2412.00	107.6 PK			2.19 H	194	111.0	-3.4
4	*2412.00	104.2 AV			2.19 H	194	107.6	-3.4
5	4824.00	40.4 PK	74.0	-33.6	2.53 H	182	39.1	1.3
6	4824.00	33.2 AV	54.0	-20.8	2.53 H	182	31.9	1.3

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

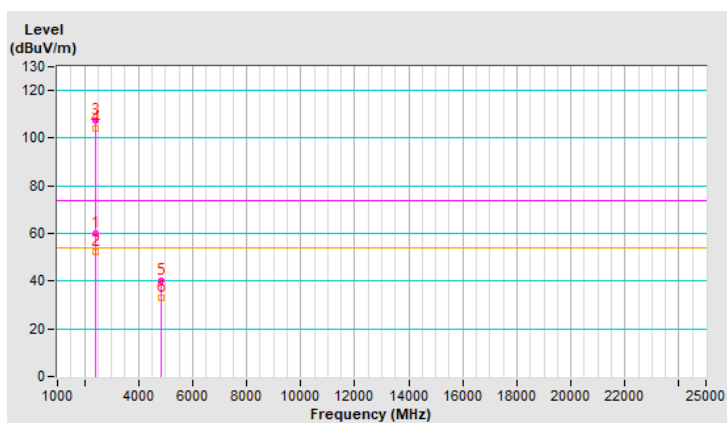




<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.3 PK	74.0	-18.7	1.45 V	87	58.7	-3.4
2	2390.00	45.7 AV	54.0	-8.3	1.45 V	87	49.1	-3.4
3	*2412.00	100.8 PK			1.45 V	87	104.2	-3.4
4	*2412.00	98.3 AV			1.45 V	87	101.7	-3.4
5	4824.00	40.6 PK	74.0	-33.4	2.50 V	192	39.3	1.3
6	4824.00	33.4 AV	54.0	-20.6	2.50 V	192	32.1	1.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

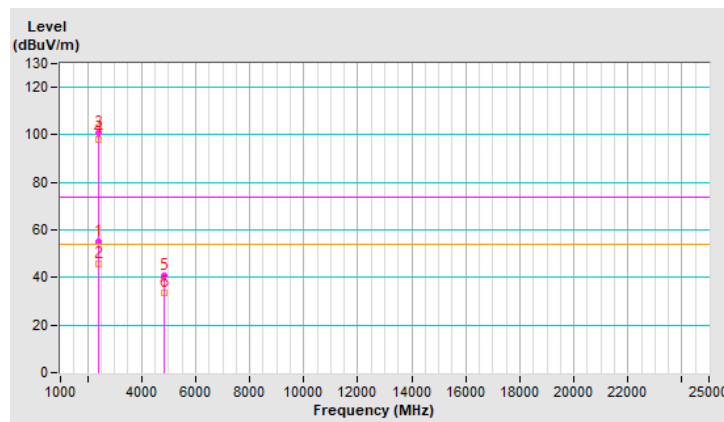


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.8 PK	74.0	-15.2	2.19 H	189	62.2	-3.4
2	2390.00	49.0 AV	54.0	-5.0	2.19 H	189	52.4	-3.4
3	*2437.00	111.5 PK			2.19 H	189	114.9	-3.4
4	*2437.00	108.0 AV			2.19 H	189	111.4	-3.4
5	2483.50	59.6 PK	74.0	-14.4	2.19 H	189	63.0	-3.4
6	2483.50	45.9 AV	54.0	-8.1	2.19 H	189	49.3	-3.4
7	4874.00	40.7 PK	74.0	-33.3	2.13 H	252	39.4	1.3
8	4874.00	33.2 AV	54.0	-20.8	2.13 H	252	31.9	1.3
9	7311.00	46.8 PK	74.0	-27.2	2.22 H	262	39.8	7.0
10	7311.00	36.5 AV	54.0	-17.5	2.22 H	262	29.5	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

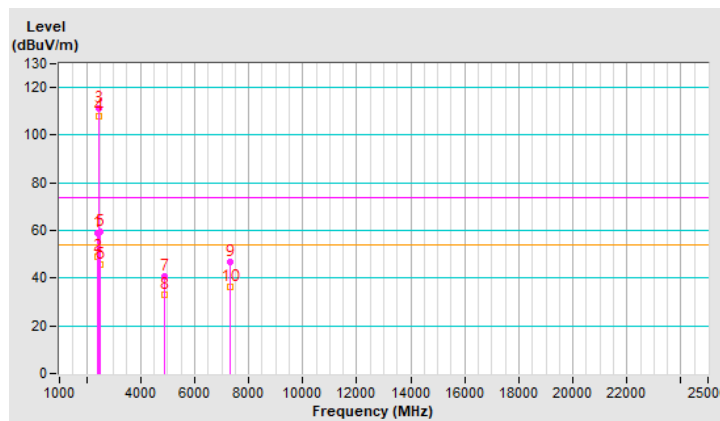


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.7 PK	74.0	-18.3	1.57 V	96	59.1	-3.4
2	2390.00	45.8 AV	54.0	-8.2	1.57 V	96	49.2	-3.4
3	*2437.00	104.7 PK			1.57 V	96	108.1	-3.4
4	*2437.00	102.4 AV			1.57 V	96	105.8	-3.4
5	2483.50	57.6 PK	74.0	-16.4	1.57 V	96	61.0	-3.4
6	2483.50	41.6 AV	54.0	-12.4	1.57 V	96	45.0	-3.4
7	4874.00	40.9 PK	74.0	-33.1	2.14 V	261	39.6	1.3
8	4874.00	33.5 AV	54.0	-20.5	2.14 V	261	32.2	1.3
9	7311.00	47.3 PK	74.0	-26.7	2.27 V	249	40.3	7.0
10	7311.00	36.9 AV	54.0	-17.1	2.27 V	249	29.9	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

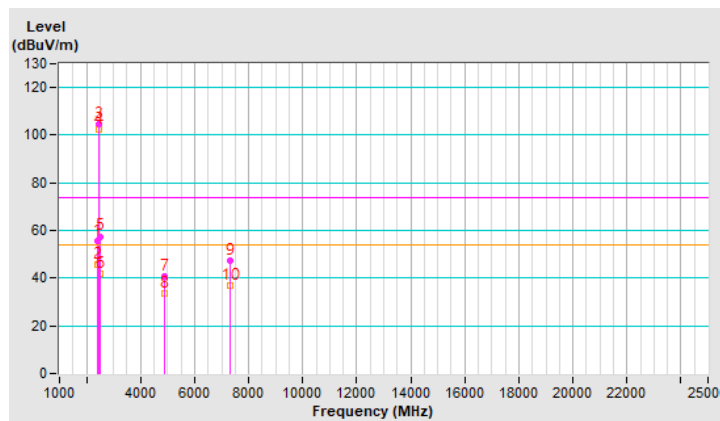


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.8 PK			2.19 H	189	111.2	-3.4
2	*2462.00	104.3 AV			2.19 H	189	107.7	-3.4
3	2483.50	61.9 PK	74.0	-12.1	2.19 H	189	65.3	-3.4
4	2483.50	52.2 AV	54.0	-1.8	2.19 H	189	55.6	-3.4
5	4924.00	40.5 PK	74.0	-33.5	2.13 H	266	39.3	1.2
6	4924.00	33.1 AV	54.0	-20.9	2.13 H	266	31.9	1.2
7	7386.00	46.2 PK	74.0	-27.8	1.98 H	252	39.2	7.0
8	7386.00	36.4 AV	54.0	-17.6	1.98 H	252	29.4	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

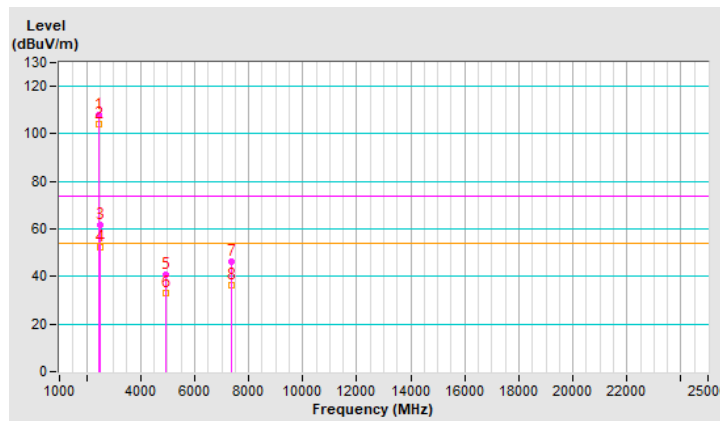


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.5 PK			1.49 V	93	103.9	-3.4
2	*2462.00	97.8 AV			1.49 V	93	101.2	-3.4
3	2483.50	55.1 PK	74.0	-18.9	1.49 V	93	58.5	-3.4
4	2483.50	45.4 AV	54.0	-8.6	1.49 V	93	48.8	-3.4
5	4924.00	40.6 PK	74.0	-33.4	2.19 V	276	39.4	1.2
6	4924.00	33.2 AV	54.0	-20.8	2.19 V	276	32.0	1.2
7	7386.00	46.3 PK	74.0	-27.7	1.95 V	239	39.3	7.0
8	7386.00	36.7 AV	54.0	-17.3	1.95 V	239	29.7	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

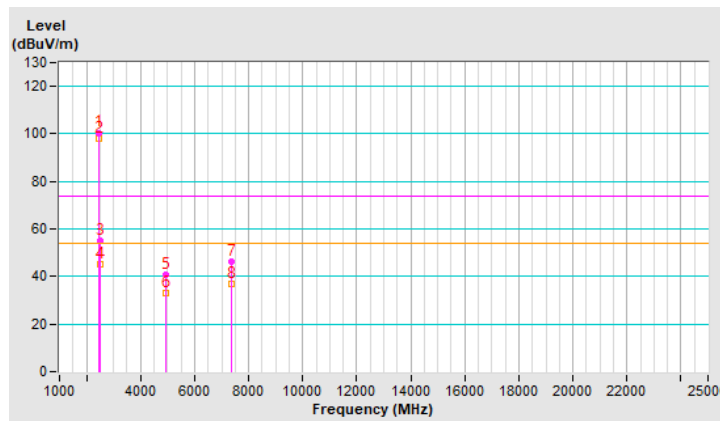


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.1 PK			2.19 H	189	111.5	-3.4
2	*2467.00	104.7 AV			2.19 H	189	108.1	-3.4
3	2483.50	62.3 PK	74.0	-11.7	2.19 H	189	65.7	-3.4
4	2483.50	52.4 AV	54.0	-1.6	2.19 H	189	55.8	-3.4
5	4934.00	40.3 PK	74.0	-33.7	2.15 H	201	39.1	1.2
6	4934.00	33.2 AV	54.0	-20.8	2.15 H	201	32.0	1.2
7	7401.00	46.3 PK	74.0	-27.7	2.51 H	192	39.3	7.0
8	7401.00	36.4 AV	54.0	-17.6	2.51 H	192	29.4	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

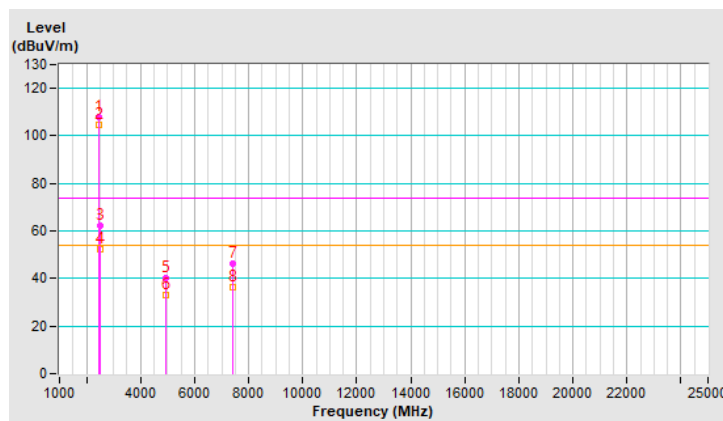


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	100.8 PK			1.45 V	106	104.2	-3.4
2	*2467.00	98.2 AV			1.45 V	106	101.6	-3.4
3	2483.50	55.4 PK	74.0	-18.6	1.45 V	106	58.8	-3.4
4	2483.50	45.7 AV	54.0	-8.3	1.45 V	106	49.1	-3.4
5	4934.00	40.2 PK	74.0	-33.8	2.24 V	284	39.0	1.2
6	4934.00	32.5 AV	54.0	-21.5	2.24 V	284	31.3	1.2
7	7401.00	45.8 PK	74.0	-28.2	1.88 V	246	38.8	7.0
8	7401.00	36.1 AV	54.0	-17.9	1.88 V	246	29.1	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

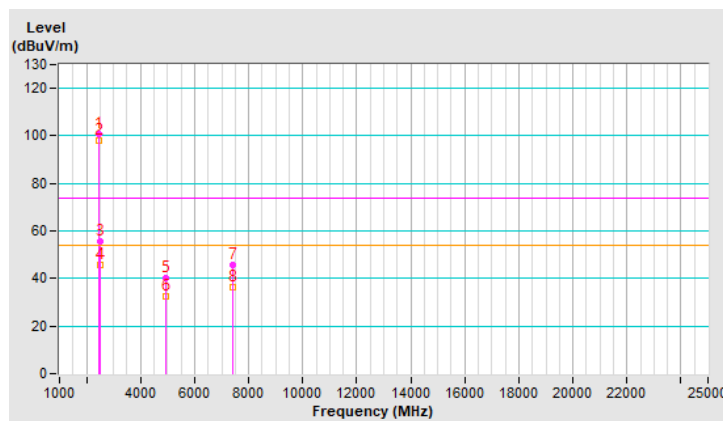


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.5 PK			2.19 H	189	105.9	-3.4
2	*2472.00	99.0 AV			2.19 H	189	102.4	-3.4
3	2483.50	60.7 PK	74.0	-13.3	2.19 H	189	64.1	-3.4
4	2483.50	52.4 AV	54.0	-1.6	2.19 H	189	55.8	-3.4
5	4944.00	40.2 PK	74.0	-33.8	2.16 H	222	39.0	1.2
6	4944.00	33.4 AV	54.0	-20.6	2.16 H	222	32.2	1.2
7	7416.00	46.1 PK	74.0	-27.9	2.41 H	210	38.9	7.2
8	7416.00	36.2 AV	54.0	-17.8	2.41 H	210	29.0	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

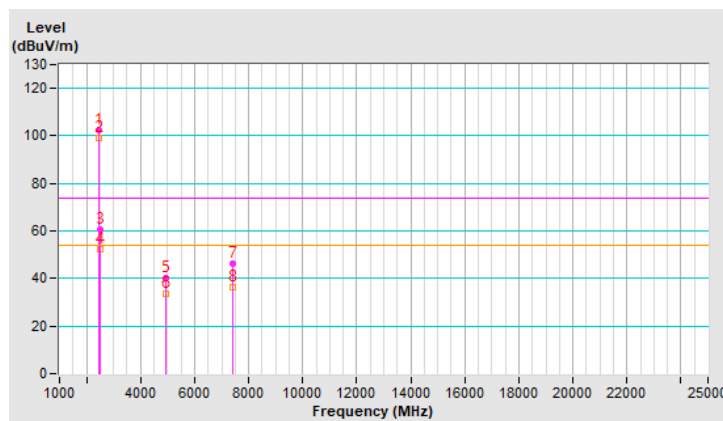




<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	95.0 PK			1.47 V	90	98.4	-3.4
2	*2472.00	92.6 AV			1.47 V	90	96.0	-3.4
3	2483.50	55.6 PK	74.0	-18.4	1.47 V	90	59.0	-3.4
4	2483.50	44.5 AV	54.0	-9.5	1.47 V	90	47.9	-3.4
5	4944.00	48.2 PK	74.0	-25.8	2.25 V	194	47.0	1.2
6	4944.00	33.2 AV	54.0	-20.8	2.25 V	194	32.0	1.2
7	7416.00	45.3 PK	74.0	-28.7	2.09 V	270	38.1	7.2
8	7416.00	36.1 AV	54.0	-17.9	2.09 V	270	28.9	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

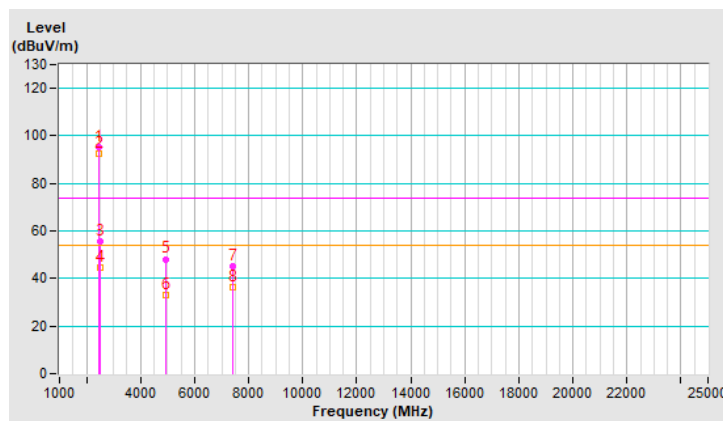


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.1 PK	74.0	-1.9	2.22 H	193	75.5	-3.4
2	2390.00	52.1 AV	54.0	-1.9	2.22 H	193	55.5	-3.4
3	*2412.00	107.6 PK			2.22 H	193	111.0	-3.4
4	*2412.00	97.7 AV			2.22 H	193	101.1	-3.4
5	4824.00	40.9 PK	74.0	-33.1	2.17 H	259	39.6	1.3
6	4824.00	34.1 AV	54.0	-19.9	2.17 H	259	32.8	1.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

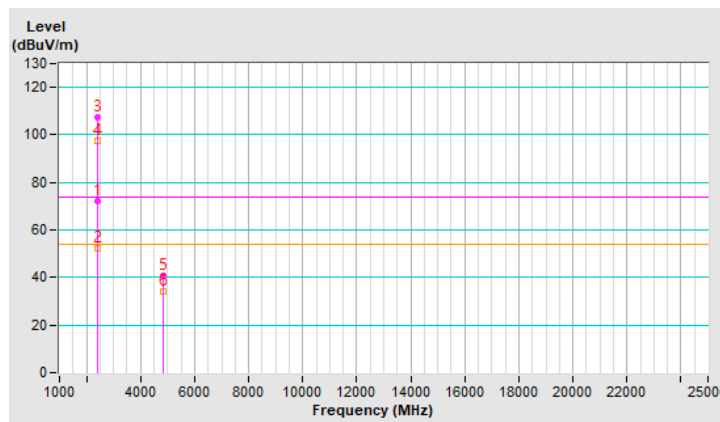


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.4 PK	74.0	-8.6	1.71 V	88	68.8	-3.4
2	2390.00	46.5 AV	54.0	-7.5	1.71 V	88	49.9	-3.4
3	*2412.00	103.9 PK			1.71 V	88	107.3	-3.4
4	*2412.00	94.7 AV			1.71 V	88	98.1	-3.4
5	4824.00	41.2 PK	74.0	-32.8	2.14 V	255	39.9	1.3
6	4824.00	34.2 AV	54.0	-19.8	2.14 V	255	32.9	1.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

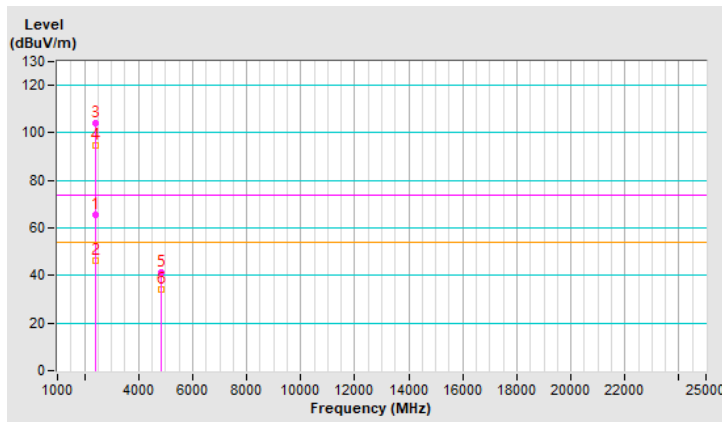


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.0 PK	74.0	-15.0	2.20 H	192	62.4	-3.4
2	2390.00	51.8 AV	54.0	-2.2	2.20 H	192	55.2	-3.4
3	*2437.00	110.5 PK			2.20 H	192	113.9	-3.4
4	*2437.00	108.1 AV			2.20 H	192	111.5	-3.4
5	2483.50	57.4 PK	74.0	-16.6	2.20 H	192	60.8	-3.4
6	2483.50	49.3 AV	54.0	-4.7	2.20 H	192	52.7	-3.4
7	4874.00	40.9 PK	74.0	-33.1	2.09 H	262	39.6	1.3
8	4874.00	33.4 AV	54.0	-20.6	2.09 H	262	32.1	1.3
9	7311.00	47.2 PK	74.0	-26.8	2.24 H	257	40.2	7.0
10	7311.00	36.7 AV	54.0	-17.3	2.24 H	257	29.7	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

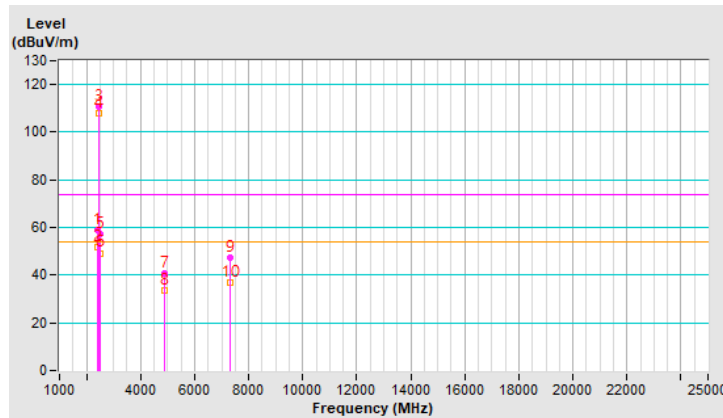


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.2 PK	74.0	-8.8	1.73 V	93	68.6	-3.4
2	2390.00	46.1 AV	54.0	-7.9	1.73 V	93	49.5	-3.4
3	*2437.00	106.7 PK			1.73 V	93	110.1	-3.4
4	*2437.00	105.7 AV			1.73 V	93	109.1	-3.4
5	2483.50	59.1 PK	74.0	-14.9	1.73 V	93	62.5	-3.4
6	2483.50	45.2 AV	54.0	-8.8	1.73 V	93	48.6	-3.4
7	4874.00	40.9 PK	74.0	-33.1	2.17 V	260	39.6	1.3
8	4874.00	33.5 AV	54.0	-20.5	2.17 V	260	32.2	1.3
9	7311.00	47.0 PK	74.0	-27.0	2.24 V	268	40.0	7.0
10	7311.00	36.8 AV	54.0	-17.2	2.24 V	268	29.8	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

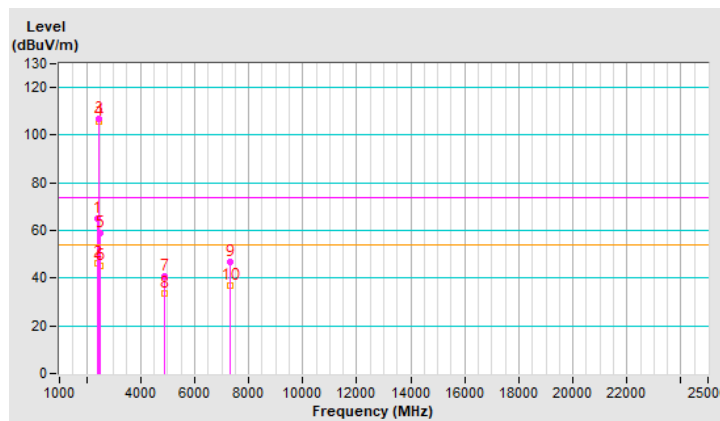


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.4 PK			1.80 H	189	110.8	-3.4
2	*2462.00	98.0 AV			1.80 H	189	101.4	-3.4
3	2483.50	70.4 PK	74.0	-3.6	1.80 H	189	73.8	-3.4
4	2483.50	52.3 AV	54.0	-1.7	1.80 H	189	55.7	-3.4
5	4924.00	41.5 PK	74.0	-32.5	2.08 H	264	40.3	1.2
6	4924.00	33.8 AV	54.0	-20.2	2.08 H	264	32.6	1.2
7	7386.00	47.2 PK	74.0	-26.8	2.23 H	259	40.2	7.0
8	7386.00	37.0 AV	54.0	-17.0	2.23 H	259	30.0	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

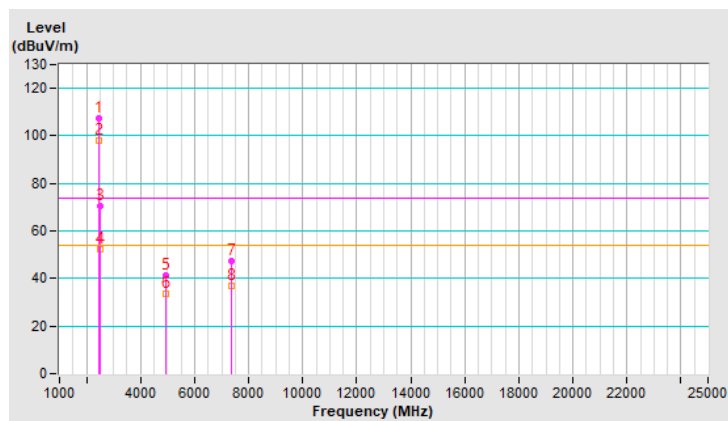


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.8 PK			1.02 V	242	105.2	-3.4
2	*2462.00	93.3 AV			1.02 V	242	96.7	-3.4
3	2483.50	58.6 PK	74.0	-15.4	1.02 V	242	62.0	-3.4
4	2483.50	44.4 AV	54.0	-9.6	1.02 V	242	47.8	-3.4
5	4924.00	41.2 PK	74.0	-32.8	2.18 V	255	40.0	1.2
6	4924.00	33.8 AV	54.0	-20.2	2.18 V	255	32.6	1.2
7	7386.00	47.4 PK	74.0	-26.6	2.25 V	261	40.4	7.0
8	7386.00	37.1 AV	54.0	-16.9	2.25 V	261	30.1	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

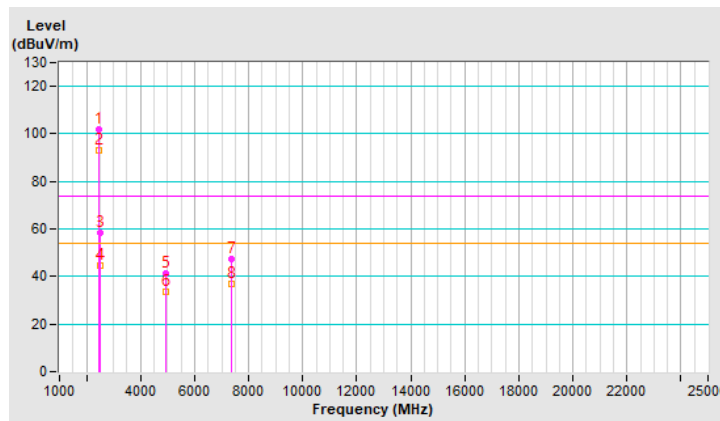


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.9 PK			1.55 H	189	108.3	-3.4
2	*2467.00	95.5 AV			1.55 H	189	98.9	-3.4
3	2483.50	71.8 PK	74.0	-2.2	1.55 H	189	75.2	-3.4
4	2483.50	52.2 AV	54.0	-1.8	1.55 H	189	55.6	-3.4
5	4934.00	41.0 PK	74.0	-33.0	2.13 H	251	39.8	1.2
6	4934.00	33.6 AV	54.0	-20.4	2.13 H	251	32.4	1.2
7	7401.00	47.3 PK	74.0	-26.7	2.21 H	252	40.3	7.0
8	7401.00	36.6 AV	54.0	-17.4	2.21 H	252	29.6	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

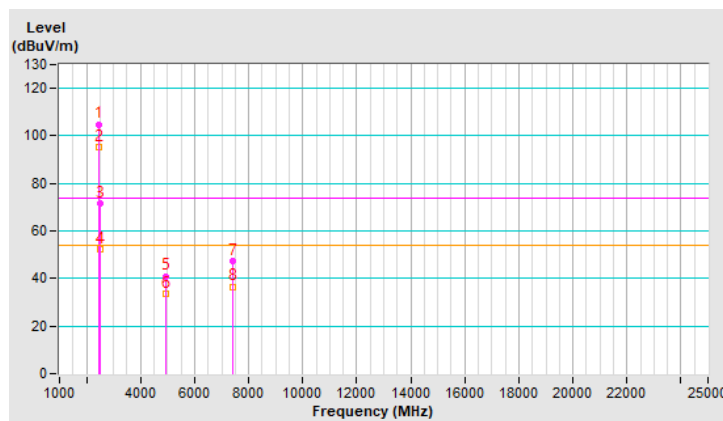




<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	100.5 PK			1.60 V	332	103.9	-3.4
2	*2467.00	91.7 AV			1.60 V	332	95.1	-3.4
3	2483.50	57.7 PK	74.0	-16.3	1.60 V	332	61.1	-3.4
4	2483.50	45.1 AV	54.0	-8.9	1.60 V	332	48.5	-3.4
5	4934.00	41.4 PK	74.0	-32.6	2.15 V	250	40.2	1.2
6	4934.00	33.9 AV	54.0	-20.1	2.15 V	250	32.7	1.2
7	7401.00	47.1 PK	74.0	-26.9	2.27 V	274	40.1	7.0
8	7401.00	36.8 AV	54.0	-17.2	2.27 V	274	29.8	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

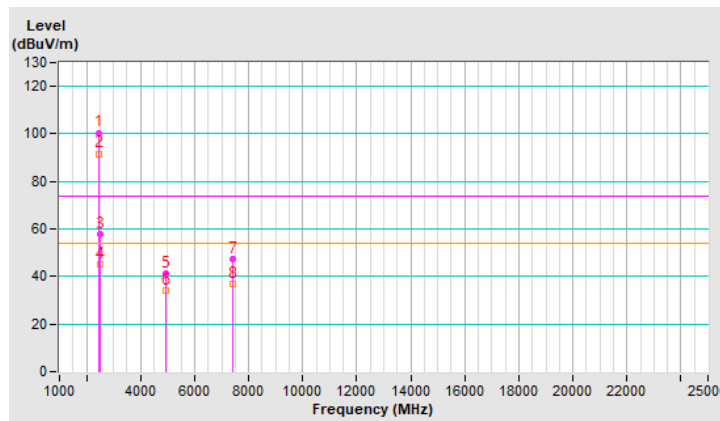


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	95.2 PK			1.78 H	190	98.6	-3.4
2	*2472.00	85.9 AV			1.78 H	190	89.3	-3.4
3	2483.50	72.4 PK	74.0	-1.6	1.78 H	190	75.8	-3.4
4	2483.50	51.6 AV	54.0	-2.4	1.78 H	190	55.0	-3.4
5	4944.00	41.3 PK	74.0	-32.7	2.11 H	276	40.1	1.2
6	4944.00	33.5 AV	54.0	-20.5	2.11 H	276	32.3	1.2
7	7416.00	47.2 PK	74.0	-26.8	2.21 H	263	40.0	7.2
8	7416.00	37.0 AV	54.0	-17.0	2.21 H	263	29.8	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

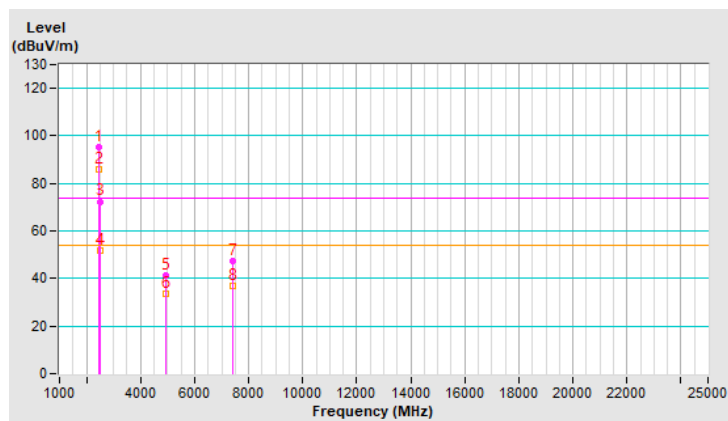


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	90.0 PK			1.63 V	331	93.4	-3.4
2	*2472.00	81.1 AV			1.63 V	331	84.5	-3.4
3	2483.50	53.8 PK	74.0	-20.2	1.63 V	331	57.2	-3.4
4	2483.50	40.8 AV	54.0	-13.2	1.63 V	331	44.2	-3.4
5	4944.00	40.9 PK	74.0	-33.1	2.16 V	264	39.7	1.2
6	4944.00	33.7 AV	54.0	-20.3	2.16 V	264	32.5	1.2
7	7416.00	47.2 PK	74.0	-26.8	2.20 V	280	40.0	7.2
8	7416.00	37.0 AV	54.0	-17.0	2.20 V	280	29.8	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

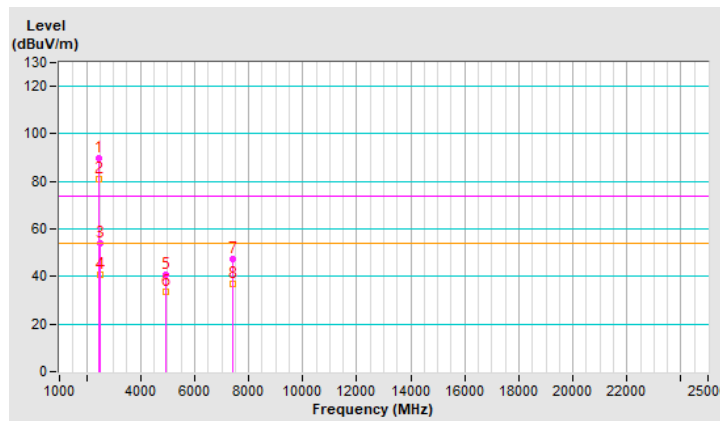


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.8 PK	74.0	-7.2	1.96 H	191	70.2	-3.4
2	2390.00	52.1 AV	54.0	-1.9	1.96 H	191	55.5	-3.4
3	*2412.00	110.5 PK			1.96 H	191	113.9	-3.4
4	*2412.00	98.9 AV			1.96 H	191	102.3	-3.4
5	4824.00	41.4 PK	74.0	-32.6	2.14 H	267	40.1	1.3
6	4824.00	33.7 AV	54.0	-20.3	2.14 H	267	32.4	1.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

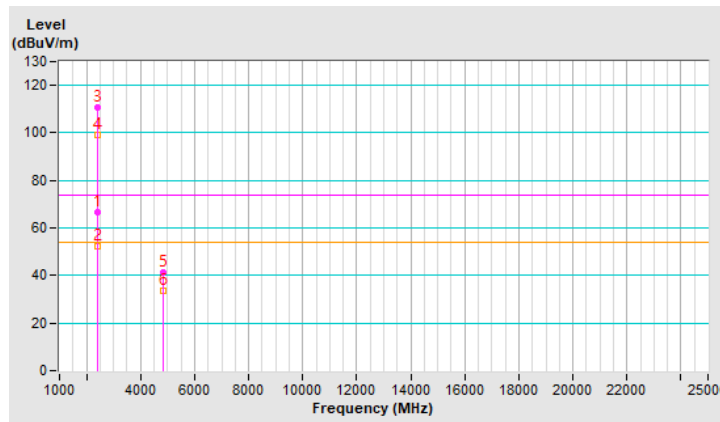


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.0 PK	74.0	-18.0	1.63 V	322	59.4	-3.4
2	2390.00	42.8 AV	54.0	-11.2	1.63 V	322	46.2	-3.4
3	*2412.00	105.9 PK			1.63 V	322	109.3	-3.4
4	*2412.00	95.5 AV			1.63 V	322	98.9	-3.4
5	4824.00	41.5 PK	74.0	-32.5	2.14 V	267	40.2	1.3
6	4824.00	33.9 AV	54.0	-20.1	2.14 V	267	32.6	1.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

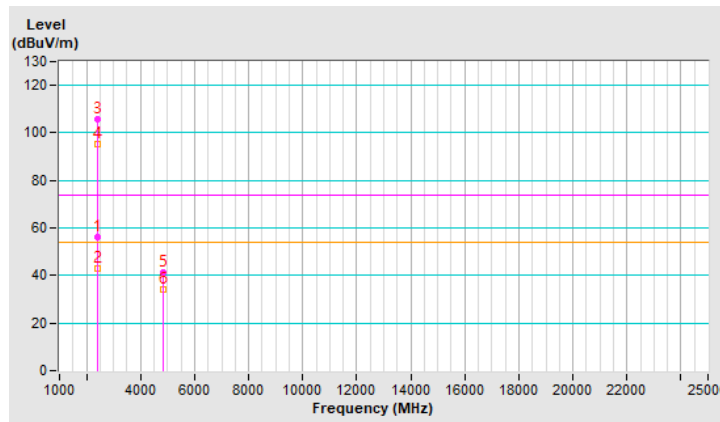


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.2 PK	74.0	-3.8	2.22 H	190	73.6	-3.4
2	2390.00	51.3 AV	54.0	-2.7	2.22 H	190	54.7	-3.4
3	*2437.00	114.1 PK			2.22 H	190	117.5	-3.4
4	*2437.00	102.7 AV			2.22 H	190	106.1	-3.4
5	2483.50	72.4 PK	74.0	-1.6	2.22 H	190	75.8	-3.4
6	2483.50	50.3 AV	54.0	-3.7	2.22 H	190	53.7	-3.4
7	4874.00	40.8 PK	74.0	-33.2	2.11 H	256	39.5	1.3
8	4874.00	33.1 AV	54.0	-20.9	2.11 H	256	31.8	1.3
9	7311.00	46.8 PK	74.0	-27.2	2.29 H	258	39.8	7.0
10	7311.00	36.3 AV	54.0	-17.7	2.29 H	258	29.3	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

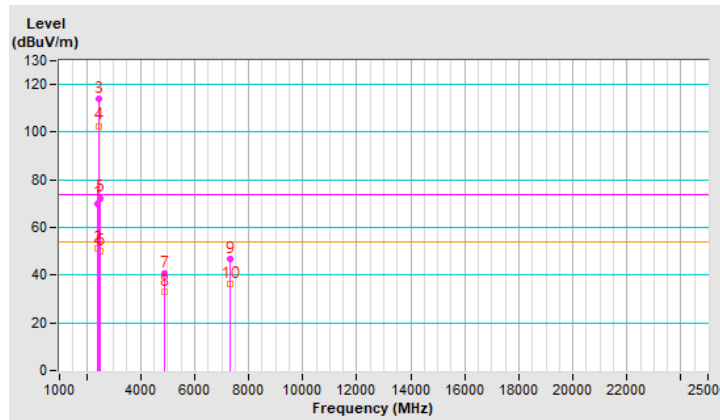


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.1 PK	74.0	-17.9	1.66 V	337	59.5	-3.4
2	2390.00	42.7 AV	54.0	-11.3	1.66 V	337	46.1	-3.4
3	*2437.00	109.7 PK			1.66 V	337	113.1	-3.4
4	*2437.00	99.4 AV			1.66 V	337	102.8	-3.4
5	2483.50	57.7 PK	74.0	-16.3	1.66 V	337	61.1	-3.4
6	2483.50	43.8 AV	54.0	-10.2	1.66 V	337	47.2	-3.4
7	4874.00	41.3 PK	74.0	-32.7	2.21 V	254	40.0	1.3
8	4874.00	33.7 AV	54.0	-20.3	2.21 V	254	32.4	1.3
9	7311.00	46.9 PK	74.0	-27.1	2.18 V	283	39.9	7.0
10	7311.00	36.5 AV	54.0	-17.5	2.18 V	283	29.5	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

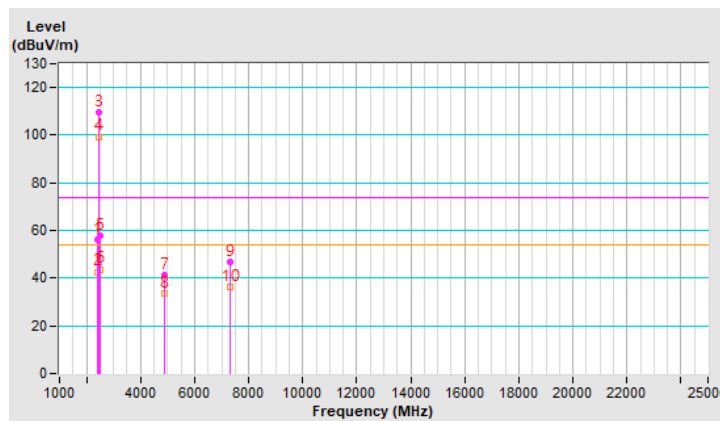


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.8 PK			1.55 H	188	110.2	-3.4
2	*2462.00	95.9 AV			1.55 H	188	99.3	-3.4
3	2483.50	67.1 PK	74.0	-6.9	1.55 H	188	70.5	-3.4
4	2483.50	52.3 AV	54.0	-1.7	1.55 H	188	55.7	-3.4
5	4924.00	40.6 PK	74.0	-33.4	2.15 H	271	39.4	1.2
6	4924.00	32.9 AV	54.0	-21.1	2.15 H	271	31.7	1.2
7	7386.00	47.1 PK	74.0	-26.9	2.20 H	241	40.1	7.0
8	7386.00	36.6 AV	54.0	-17.4	2.20 H	241	29.6	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

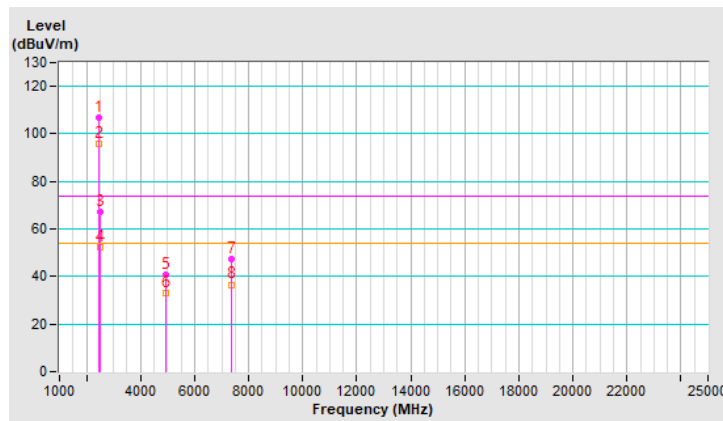




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.8 PK			1.60 V	327	106.2	-3.4
2	*2462.00	92.5 AV			1.60 V	327	95.9	-3.4
3	2483.50	58.0 PK	74.0	-16.0	1.60 V	327	61.4	-3.4
4	2483.50	43.7 AV	54.0	-10.3	1.60 V	327	47.1	-3.4
5	4924.00	40.7 PK	74.0	-33.3	2.22 V	258	39.5	1.2
6	4924.00	33.1 AV	54.0	-20.9	2.22 V	258	31.9	1.2
7	7386.00	47.2 PK	74.0	-26.8	2.30 V	275	40.2	7.0
8	7386.00	37.1 AV	54.0	-16.9	2.30 V	275	30.1	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

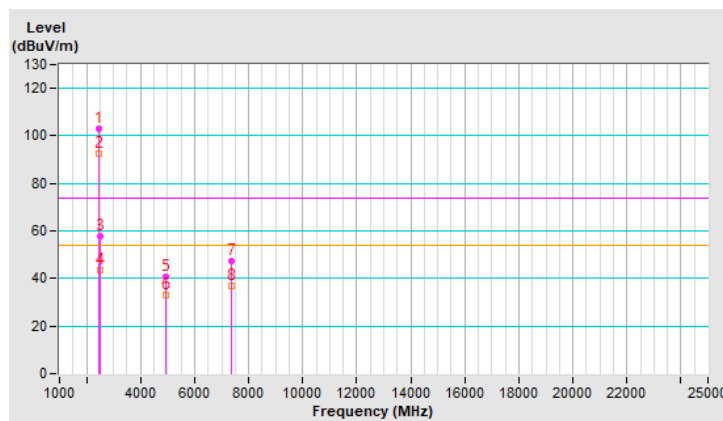


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	105.2 PK			1.78 H	189	108.6	-3.4
2	*2467.00	94.2 AV			1.78 H	189	97.6	-3.4
3	2483.50	67.8 PK	74.0	-6.2	1.78 H	189	71.2	-3.4
4	2483.50	52.2 AV	54.0	-1.8	1.78 H	189	55.6	-3.4
5	4934.00	41.0 PK	74.0	-33.0	2.10 H	252	39.8	1.2
6	4934.00	33.5 AV	54.0	-20.5	2.10 H	252	32.3	1.2
7	7401.00	47.4 PK	74.0	-26.6	2.30 H	267	40.4	7.0
8	7401.00	36.9 AV	54.0	-17.1	2.30 H	267	29.9	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

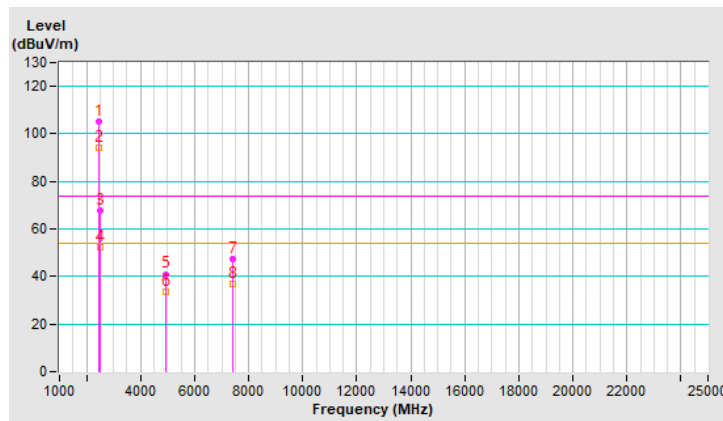


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	101.5 PK			1.59 V	330	104.9	-3.4
2	*2467.00	90.8 AV			1.59 V	330	94.2	-3.4
3	2483.50	58.1 PK	74.0	-15.9	1.59 V	330	61.5	-3.4
4	2483.50	44.7 AV	54.0	-9.3	1.59 V	330	48.1	-3.4
5	4934.00	40.8 PK	74.0	-33.2	2.23 V	259	39.6	1.2
6	4934.00	33.1 AV	54.0	-20.9	2.23 V	259	31.9	1.2
7	7401.00	46.6 PK	74.0	-27.4	2.19 V	276	39.6	7.0
8	7401.00	36.6 AV	54.0	-17.4	2.19 V	276	29.6	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

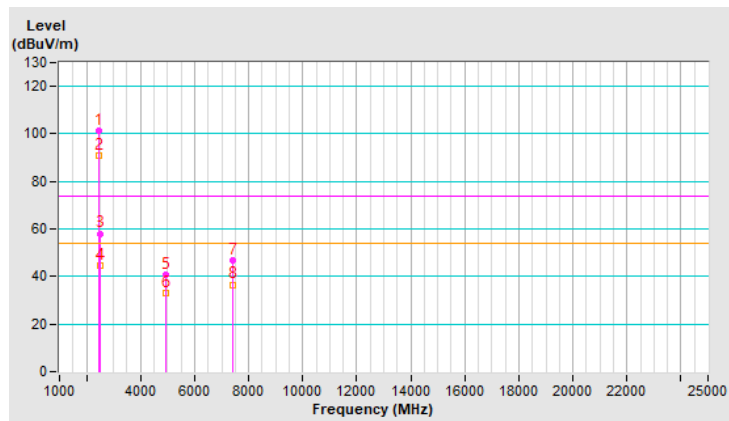


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	94.2 PK			2.10 H	183	97.6	-3.4
2	*2472.00	82.1 AV			2.10 H	183	85.5	-3.4
3	2483.50	72.3 PK	74.0	-1.7	2.10 H	183	75.7	-3.4
4	2483.50	45.6 AV	54.0	-8.4	2.10 H	183	49.0	-3.4
5	4944.00	40.7 PK	74.0	-33.3	2.08 H	269	39.5	1.2
6	4944.00	33.2 AV	54.0	-20.8	2.08 H	269	32.0	1.2
7	7416.00	47.1 PK	74.0	-26.9	2.25 H	266	39.9	7.2
8	7416.00	36.6 AV	54.0	-17.4	2.25 H	266	29.4	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

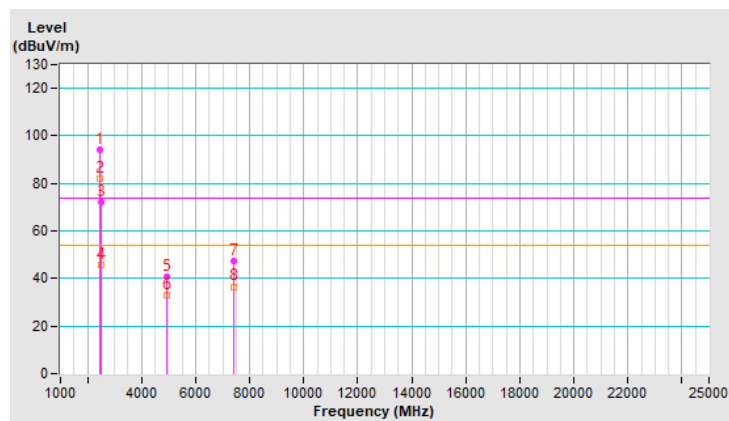


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	98.3 PK			1.58 V	334	101.7	-3.4
2	*2472.00	88.1 AV			1.58 V	334	91.5	-3.4
3	2483.50	57.3 PK	74.0	-16.7	1.58 V	334	60.7	-3.4
4	2483.50	43.5 AV	54.0	-10.5	1.58 V	334	46.9	-3.4
5	4944.00	40.4 PK	74.0	-33.6	2.15 V	275	39.2	1.2
6	4944.00	33.2 AV	54.0	-20.8	2.15 V	275	32.0	1.2
7	7416.00	46.9 PK	74.0	-27.1	2.21 V	264	39.7	7.2
8	7416.00	36.9 AV	54.0	-17.1	2.21 V	264	29.7	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

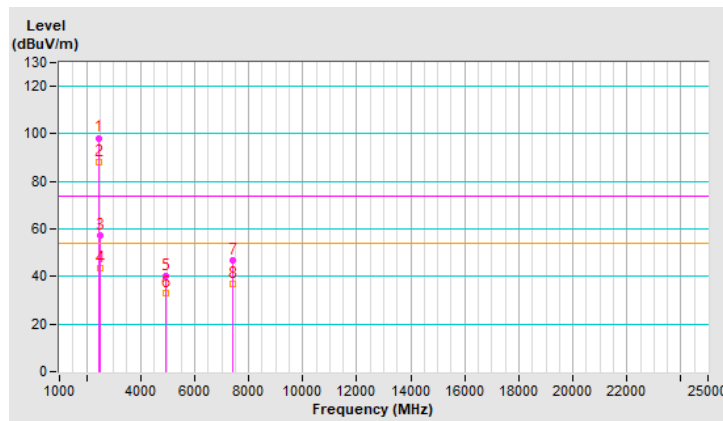


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 3 : 2422 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.2 PK	74.0	-0.8	1.95 H	192	76.6	-3.4
2	2390.00	52.4 AV	54.0	-1.6	1.95 H	192	55.8	-3.4
3	*2422.00	105.5 PK			1.95 H	192	108.9	-3.4
4	*2422.00	93.4 AV			1.95 H	192	96.8	-3.4
5	4844.00	41.0 PK	74.0	-33.0	2.14 H	255	39.7	1.3
6	4844.00	33.3 AV	54.0	-20.7	2.14 H	255	32.0	1.3
7	7266.00	47.0 PK	74.0	-27.0	2.24 H	256	39.8	7.2
8	7266.00	36.8 AV	54.0	-17.2	2.24 H	256	29.6	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

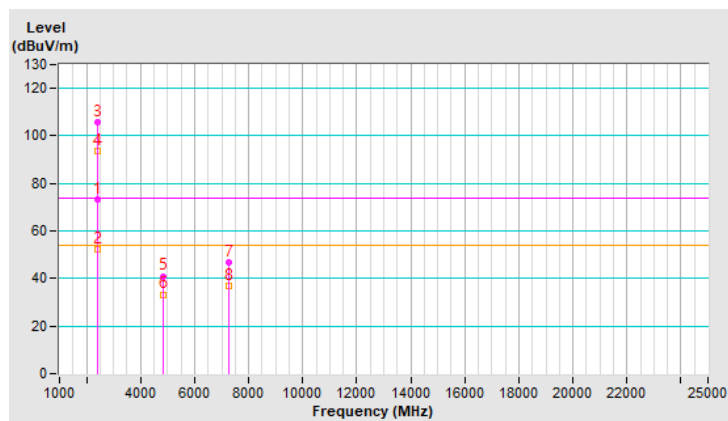


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 3 : 2422 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.9 PK	74.0	-19.1	1.62 V	323	58.3	-3.4
2	2390.00	41.6 AV	54.0	-12.4	1.62 V	323	45.0	-3.4
3	*2422.00	101.3 PK			1.62 V	323	104.7	-3.4
4	*2422.00	90.0 AV			1.62 V	323	93.4	-3.4
5	4844.00	41.1 PK	74.0	-32.9	2.17 V	259	39.8	1.3
6	4844.00	33.7 AV	54.0	-20.3	2.17 V	259	32.4	1.3
7	7266.00	46.4 PK	74.0	-27.6	2.29 V	283	39.2	7.2
8	7266.00	36.4 AV	54.0	-17.6	2.29 V	283	29.2	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

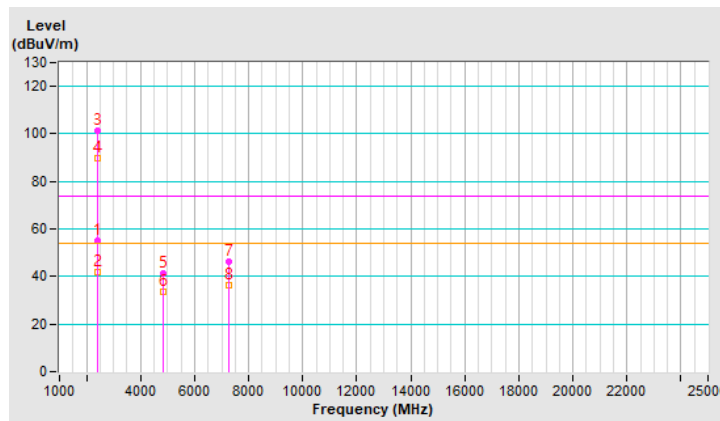


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	2.20 H	187	64.1	-3.4
2	2390.00	46.9 AV	54.0	-7.1	2.20 H	187	50.3	-3.4
3	*2437.00	106.6 PK			2.20 H	187	110.0	-3.4
4	*2437.00	95.1 AV			2.20 H	187	98.5	-3.4
5	2483.50	65.4 PK	74.0	-8.6	2.20 H	187	68.8	-3.4
6	2483.50	51.7 AV	54.0	-2.3	2.20 H	187	55.1	-3.4
7	4874.00	41.5 PK	74.0	-32.5	2.04 H	258	40.2	1.3
8	4874.00	33.9 AV	54.0	-20.1	2.04 H	258	32.6	1.3
9	7311.00	46.6 PK	74.0	-27.4	2.20 H	270	39.6	7.0
10	7311.00	36.4 AV	54.0	-17.6	2.20 H	270	29.4	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

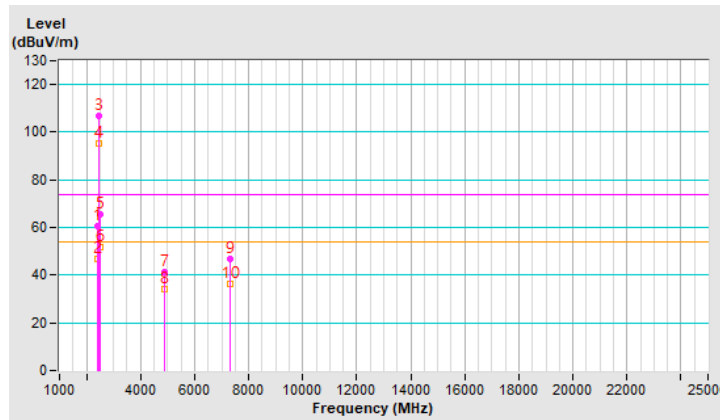




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.1 PK	74.0	-20.9	1.66 V	336	56.5	-3.4
2	2390.00	42.1 AV	54.0	-11.9	1.66 V	336	45.5	-3.4
3	*2437.00	103.2 PK			1.66 V	336	106.6	-3.4
4	*2437.00	92.1 AV			1.66 V	336	95.5	-3.4
5	2483.50	56.4 PK	74.0	-17.6	1.66 V	336	59.8	-3.4
6	2483.50	43.3 AV	54.0	-10.7	1.66 V	336	46.7	-3.4
7	4874.00	40.8 PK	74.0	-33.2	2.16 V	249	39.5	1.3
8	4874.00	33.2 AV	54.0	-20.8	2.16 V	249	31.9	1.3
9	7311.00	47.0 PK	74.0	-27.0	2.26 V	268	40.0	7.0
10	7311.00	36.8 AV	54.0	-17.2	2.26 V	268	29.8	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

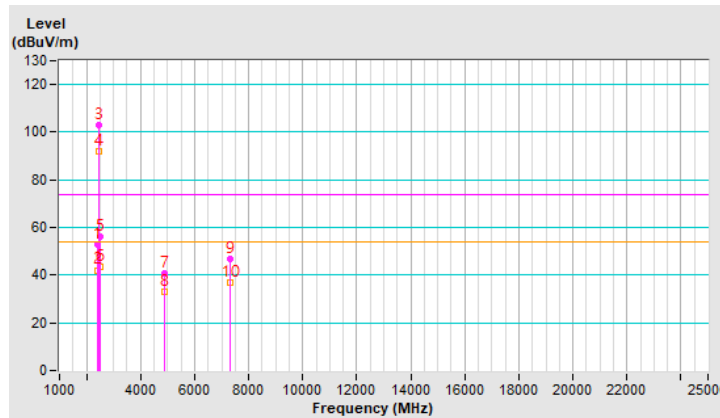


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 9 : 2452 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	104.2 PK			1.87 H	189	107.5	-3.3
2	*2452.00	92.5 AV			1.87 H	189	95.8	-3.3
3	2483.50	70.7 PK	74.0	-3.3	1.87 H	189	74.1	-3.4
4	2483.50	52.2 AV	54.0	-1.8	1.87 H	189	55.6	-3.4
5	4904.00	40.9 PK	74.0	-33.1	2.07 H	274	39.7	1.2
6	4904.00	33.2 AV	54.0	-20.8	2.07 H	274	32.0	1.2
7	7356.00	47.4 PK	74.0	-26.6	2.26 H	247	40.4	7.0
8	7356.00	36.8 AV	54.0	-17.2	2.26 H	247	29.8	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

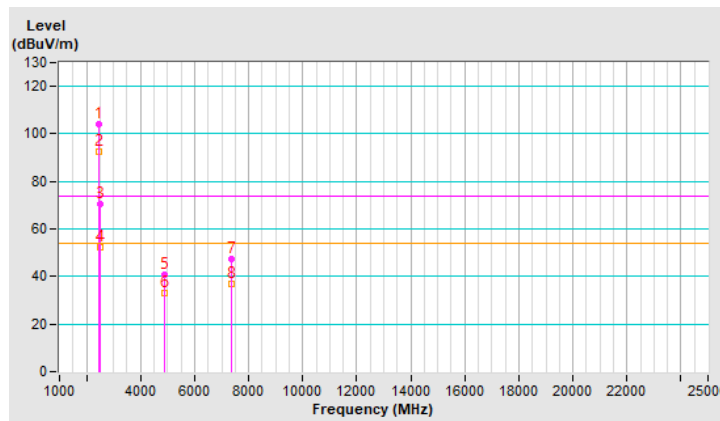


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 9 : 2452 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	100.3 PK			1.78 V	324	103.6	-3.3
2	*2452.00	88.7 AV			1.78 V	324	92.0	-3.3
3	2483.50	57.4 PK	74.0	-16.6	1.78 V	324	60.8	-3.4
4	2483.50	44.1 AV	54.0	-9.9	1.78 V	324	47.5	-3.4
5	4904.00	41.3 PK	74.0	-32.7	2.16 V	248	40.1	1.2
6	4904.00	33.8 AV	54.0	-20.2	2.16 V	248	32.6	1.2
7	7356.00	47.8 PK	74.0	-26.2	2.30 V	265	40.8	7.0
8	7356.00	37.3 AV	54.0	-16.7	2.30 V	265	30.3	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

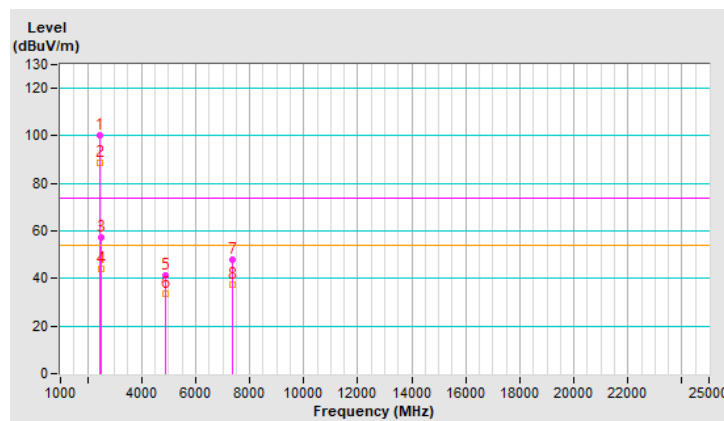


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 10 : 2457 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	104.5 PK			1.53 H	188	107.9	-3.4
2	*2457.00	92.4 AV			1.53 H	188	95.8	-3.4
3	2483.50	72.4 PK	74.0	-1.6	1.53 H	188	75.8	-3.4
4	2483.50	52.4 AV	54.0	-1.6	1.53 H	188	55.8	-3.4
5	4914.00	41.3 PK	74.0	-32.7	2.08 H	260	40.1	1.2
6	4914.00	33.8 AV	54.0	-20.2	2.08 H	260	32.6	1.2
7	7371.00	47.3 PK	74.0	-26.7	2.28 H	244	40.3	7.0
8	7371.00	36.8 AV	54.0	-17.2	2.28 H	244	29.8	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

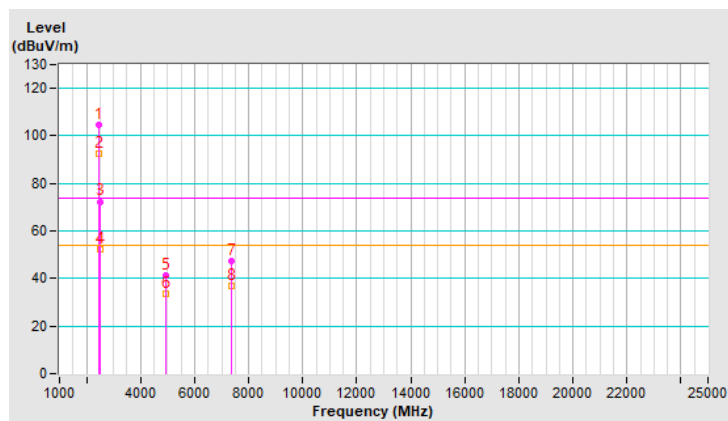


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 10 : 2457 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	100.4 PK			1.64 V	327	103.8	-3.4
2	*2457.00	88.9 AV			1.64 V	327	92.3	-3.4
3	2483.50	58.0 PK	74.0	-16.0	1.64 V	327	61.4	-3.4
4	2483.50	45.2 AV	54.0	-8.8	1.64 V	327	48.6	-3.4
5	4914.00	41.1 PK	74.0	-32.9	2.14 V	266	39.9	1.2
6	4914.00	33.9 AV	54.0	-20.1	2.14 V	266	32.7	1.2
7	7371.00	46.6 PK	74.0	-27.4	2.20 V	266	39.6	7.0
8	7371.00	36.5 AV	54.0	-17.5	2.20 V	266	29.5	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

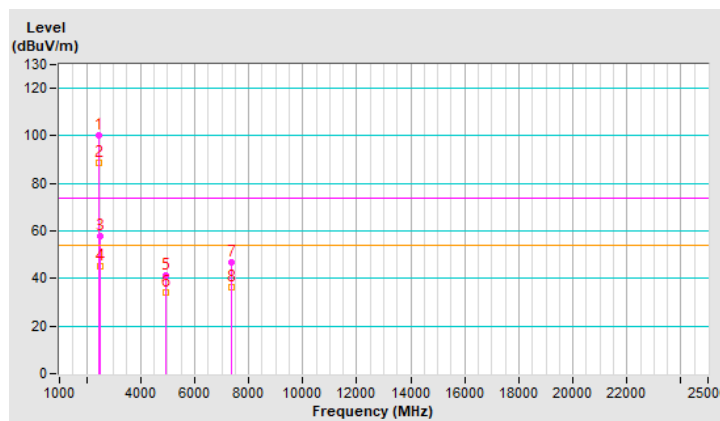


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	94.4 PK			1.82 H	192	97.8	-3.4
2	*2462.00	82.8 AV			1.82 H	192	86.2	-3.4
3	2483.50	72.2 PK	74.0	-1.8	1.82 H	192	75.6	-3.4
4	2483.50	48.5 AV	54.0	-5.5	1.82 H	192	51.9	-3.4
5	4924.00	40.1 PK	74.0	-33.9	2.11 H	255	38.9	1.2
6	4924.00	32.9 AV	54.0	-21.1	2.11 H	255	31.7	1.2
7	7386.00	47.0 PK	74.0	-27.0	2.28 H	272	40.0	7.0
8	7386.00	36.6 AV	54.0	-17.4	2.28 H	272	29.6	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

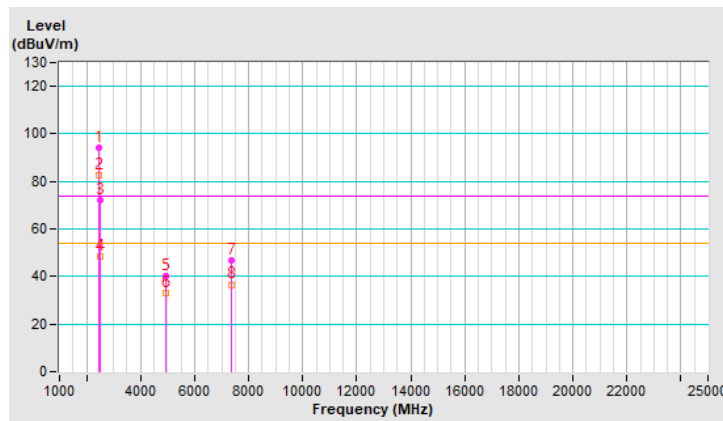


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.9 PK			1.67 V	329	103.3	-3.4
2	*2462.00	88.6 AV			1.67 V	329	92.0	-3.4
3	2483.50	59.2 PK	74.0	-14.8	1.67 V	329	62.6	-3.4
4	2483.50	47.2 AV	54.0	-6.8	1.67 V	329	50.6	-3.4
5	4924.00	40.6 PK	74.0	-33.4	2.20 V	275	39.4	1.2
6	4924.00	33.3 AV	54.0	-20.7	2.20 V	275	32.1	1.2
7	7386.00	46.9 PK	74.0	-27.1	2.26 V	276	39.9	7.0
8	7386.00	36.9 AV	54.0	-17.1	2.26 V	276	29.9	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

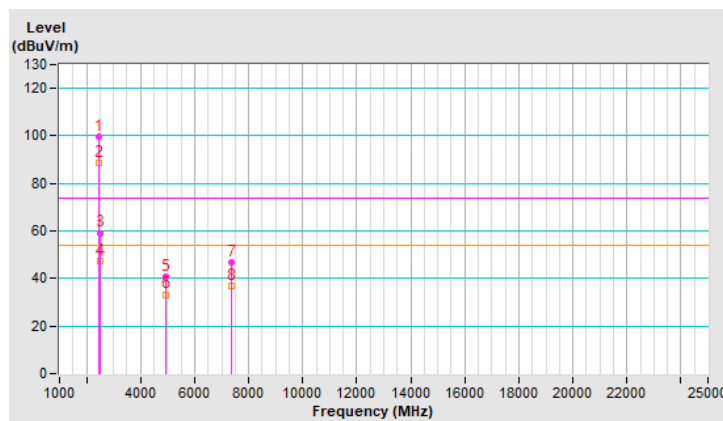


<b>RF Mode</b>	802.11ax (HE) 26-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.00 H	356	75.7	-3.4
2	2390.00	47.8 AV	54.0	-6.2	1.00 H	356	51.2	-3.4
3	*2412.00	112.7 PK			1.00 H	356	116.1	-3.4
4	*2412.00	102.4 AV			1.00 H	356	105.8	-3.4
5	4824.00	48.4 PK	74.0	-25.6	1.01 H	327	47.1	1.3
6	4824.00	27.1 AV	54.0	-26.9	1.01 H	327	25.8	1.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

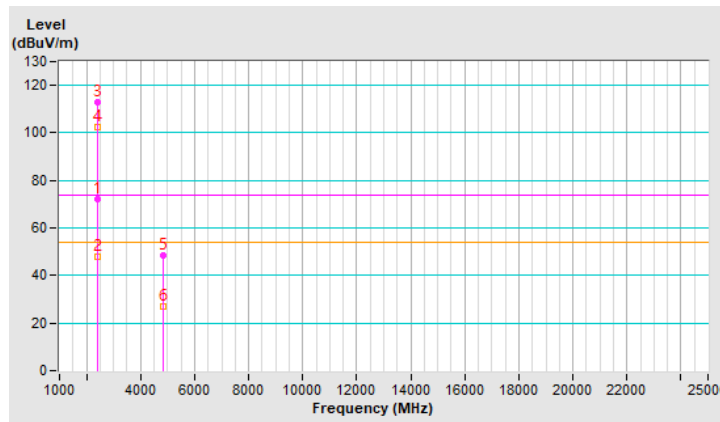




<b>RF Mode</b>	802.11ax (HE) 26-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.2 PK	74.0	-2.8	2.59 V	208	74.6	-3.4
2	2390.00	47.2 AV	54.0	-6.8	2.59 V	208	50.6	-3.4
3	*2412.00	110.3 PK			2.59 V	208	113.7	-3.4
4	*2412.00	101.0 AV			2.59 V	208	104.4	-3.4
5	4824.00	47.5 PK	74.0	-26.5	1.50 V	332	46.2	1.3
6	4824.00	26.1 AV	54.0	-27.9	1.50 V	332	24.8	1.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

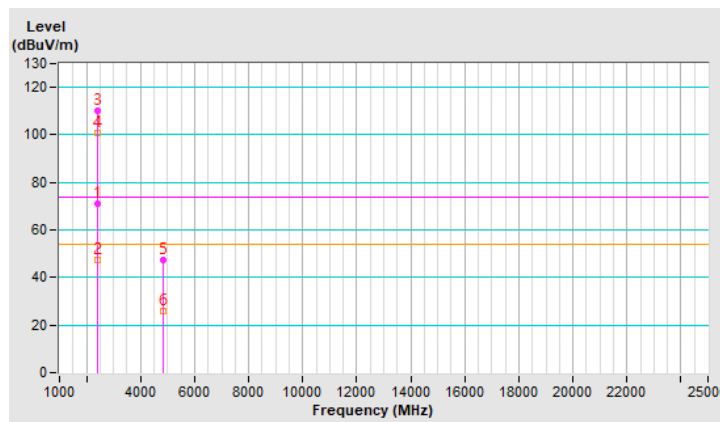


<b>RF Mode</b>	802.11ax (HE) 26-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.3 PK	74.0	-22.7	1.00 H	355	54.7	-3.4
2	2390.00	40.6 AV	54.0	-13.4	1.00 H	355	44.0	-3.4
3	*2437.00	117.9 PK			1.00 H	355	121.3	-3.4
4	*2437.00	107.3 AV			1.00 H	355	110.7	-3.4
5	2483.50	51.5 PK	74.0	-22.5	1.00 H	355	54.9	-3.4
6	2483.50	39.1 AV	54.0	-14.9	1.00 H	355	42.5	-3.4
7	4874.00	50.9 PK	74.0	-23.1	1.00 H	333	49.6	1.3
8	4874.00	29.7 AV	54.0	-24.3	1.00 H	333	28.4	1.3
9	7311.00	54.2 PK	74.0	-19.8	1.02 H	321	47.2	7.0
10	7311.00	40.3 AV	54.0	-13.7	1.02 H	321	33.3	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

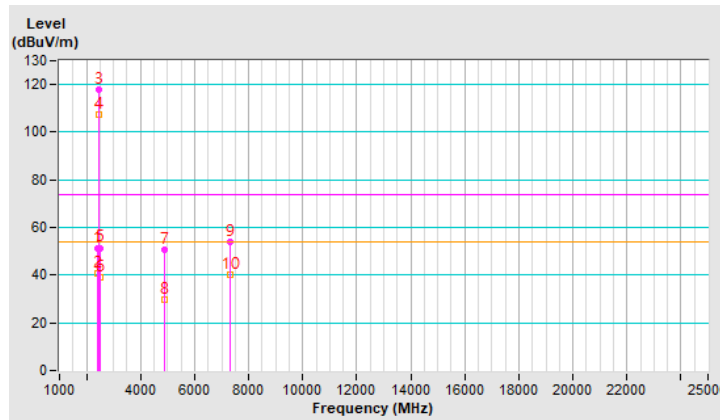


<b>RF Mode</b>	802.11ax (HE) 26-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.3 PK	74.0	-23.7	2.55 V	201	53.7	-3.4
2	2390.00	39.6 AV	54.0	-14.4	2.55 V	201	43.0	-3.4
3	*2437.00	115.5 PK			2.55 V	201	118.9	-3.4
4	*2437.00	105.4 AV			2.55 V	201	108.8	-3.4
5	2483.50	50.4 PK	74.0	-23.6	2.55 V	201	53.8	-3.4
6	2483.50	39.1 AV	54.0	-14.9	2.55 V	201	42.5	-3.4
7	4874.00	49.6 PK	74.0	-24.4	1.53 V	312	48.3	1.3
8	4874.00	28.4 AV	54.0	-25.6	1.53 V	312	27.1	1.3
9	7311.00	53.4 PK	74.0	-20.6	1.51 V	332	46.4	7.0
10	7311.00	39.5 AV	54.0	-14.5	1.51 V	332	32.5	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

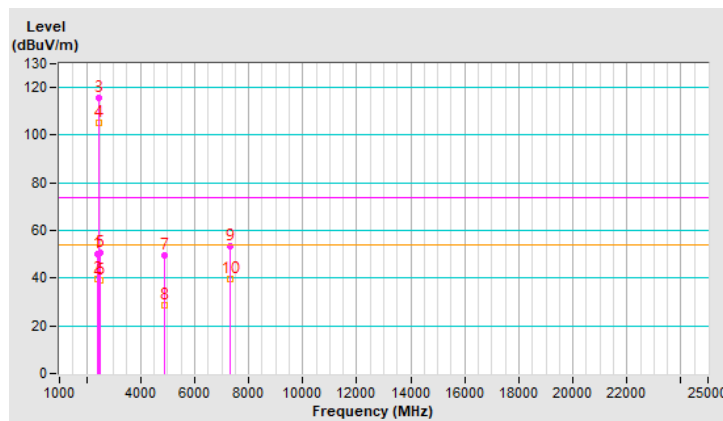

<b>RF Mode</b>	802.11ax (HE) 26-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.4 PK			1.00 H	354	115.8	-3.4
2	*2462.00	102.0 AV			1.00 H	354	105.4	-3.4
3	2483.50	72.2 PK	74.0	-1.8	1.00 H	354	75.6	-3.4
4	2483.50	47.0 AV	54.0	-7.0	1.00 H	354	50.4	-3.4
5	4924.00	47.4 PK	74.0	-26.6	1.01 H	355	46.2	1.2
6	4924.00	26.6 AV	54.0	-27.4	1.01 H	355	25.4	1.2
7	7386.00	50.3 PK	74.0	-23.7	1.04 H	333	43.3	7.0
8	7386.00	36.6 AV	54.0	-17.4	1.04 H	333	29.6	7.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

