


Mode B

| | | | |
|-----------------------------|-----------------|--|-------------------|
| RF Mode | 802.11ax (HE20) | Channel | CH 165 : 5825 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | (QP) RB = 120kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 28°C, 76% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 44.70 | 33.3 QP | 40.0 | -6.7 | 1.12 H | 360 | 46.1 | -12.8 |
| 2 | 81.30 | 22.2 QP | 40.0 | -17.8 | 1.00 H | 325 | 40.2 | -18.0 |
| 3 | 237.70 | 34.4 QP | 46.0 | -11.6 | 1.52 H | 360 | 49.0 | -14.6 |
| 4 | 290.20 | 33.9 QP | 46.0 | -12.1 | 1.50 H | 74 | 46.4 | -12.5 |
| 5 | 388.80 | 24.3 QP | 46.0 | -21.7 | 1.05 H | 360 | 34.5 | -10.2 |
| 6 | 458.10 | 28.7 QP | 46.0 | -17.3 | 1.00 H | 122 | 36.8 | -8.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

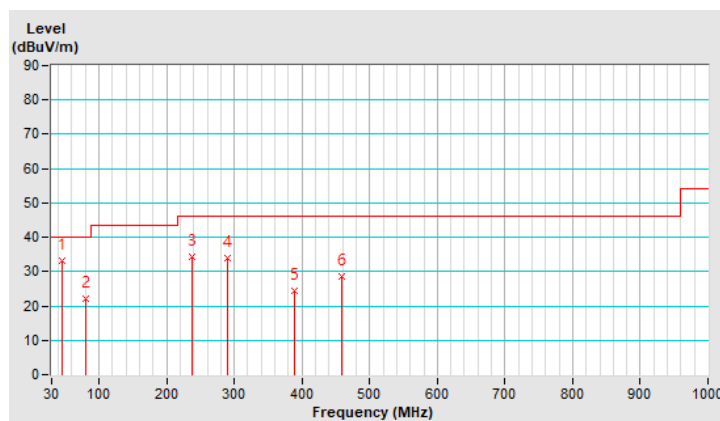


| | | | |
|-----------------------------|-----------------|--|-------------------|
| RF Mode | 802.11ax (HE20) | Channel | CH 165 : 5825 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | (QP) RB = 120kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 28°C, 76% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 36.00 | 23.8 QP | 40.0 | -16.2 | 1.05 V | 62 | 37.4 | -13.6 |
| 2 | 137.40 | 26.2 QP | 43.5 | -17.3 | 1.00 V | 325 | 39.6 | -13.4 |
| 3 | 176.40 | 19.8 QP | 43.5 | -23.7 | 1.00 V | 299 | 33.7 | -13.9 |
| 4 | 231.40 | 32.4 QP | 46.0 | -13.6 | 1.00 V | 172 | 47.7 | -15.3 |
| 5 | 364.80 | 21.3 QP | 46.0 | -24.7 | 1.00 V | 38 | 32.2 | -10.9 |
| 6 | 637.90 | 24.3 QP | 46.0 | -21.7 | 1.12 V | 355 | 28.9 | -4.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

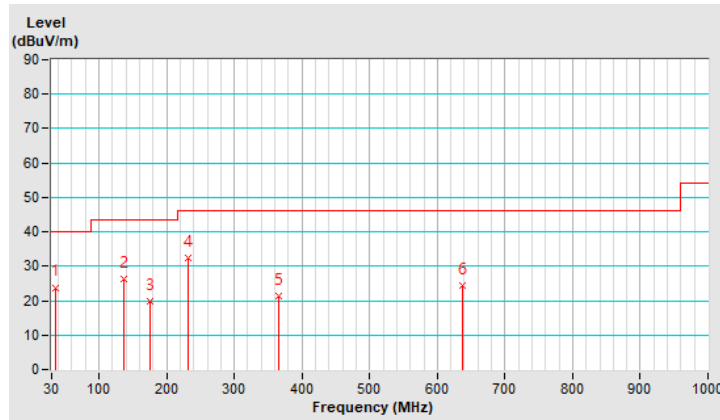


Mode C

| | | | |
|-----------------------------|-----------------|--|-------------------|
| RF Mode | 802.11ax (HE20) | Channel | CH 165 : 5825 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | (QP) RB = 120kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 28°C, 76% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 42.50 | 30.8 QP | 40.0 | -9.2 | 1.12 H | 360 | 43.7 | -12.9 |
| 2 | 76.00 | 19.1 QP | 40.0 | -20.9 | 1.00 H | 325 | 35.6 | -16.5 |
| 3 | 233.30 | 30.4 QP | 46.0 | -15.6 | 1.52 H | 360 | 45.4 | -15.0 |
| 4 | 283.90 | 30.9 QP | 46.0 | -15.1 | 1.50 H | 74 | 43.5 | -12.6 |
| 5 | 383.50 | 20.5 QP | 46.0 | -25.5 | 1.05 H | 360 | 30.8 | -10.3 |
| 6 | 453.30 | 24.3 QP | 46.0 | -21.7 | 1.00 H | 122 | 32.5 | -8.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

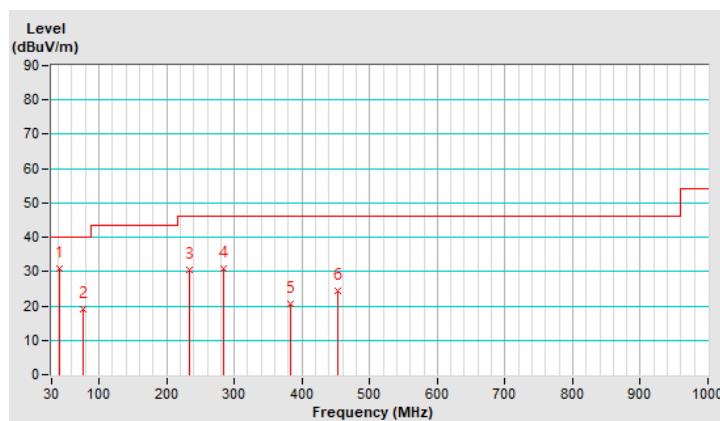


| | | | |
|-----------------------------|-----------------|--|-------------------|
| RF Mode | 802.11ax (HE20) | Channel | CH 165 : 5825 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | (QP) RB = 120kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 28°C, 76% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 39.00 | 26.8 QP | 40.0 | -13.2 | 1.05 V | 62 | 40.2 | -13.4 |
| 2 | 141.00 | 30.0 QP | 43.5 | -13.5 | 1.00 V | 325 | 43.0 | -13.0 |
| 3 | 180.40 | 23.4 QP | 43.5 | -20.1 | 1.00 V | 299 | 37.9 | -14.5 |
| 4 | 235.30 | 36.8 QP | 46.0 | -9.2 | 1.00 V | 172 | 51.6 | -14.8 |
| 5 | 369.20 | 25.8 QP | 46.0 | -20.2 | 1.00 V | 38 | 36.5 | -10.7 |
| 6 | 643.00 | 28.6 QP | 46.0 | -17.4 | 1.12 V | 355 | 33.0 | -4.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

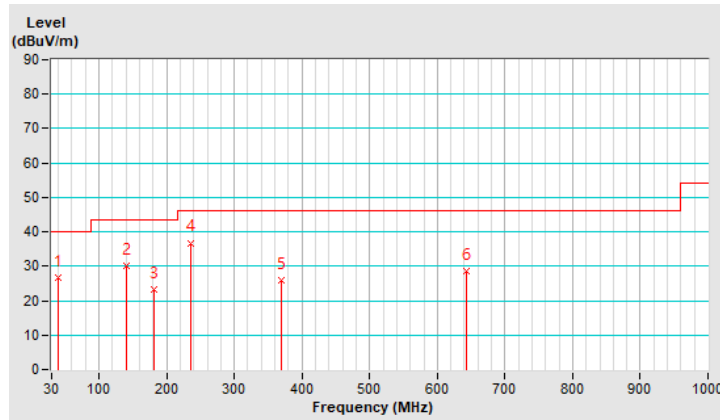

7.9 Unwanted Emissions above 1 GHz

Mode A


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 36 : 5180 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 5150.00 | 60.7 PK | 74.0 | -13.3 | 1.01 H | 19 | 58.7 | 2.0 |
| 2 | 5150.00 | 40.4 AV | 54.0 | -13.6 | 1.01 H | 19 | 38.4 | 2.0 |
| 3 | *5180.00 | 101.2 PK | | | 1.01 H | 19 | 99.3 | 1.9 |
| 4 | *5180.00 | 93.1 AV | | | 1.01 H | 19 | 91.2 | 1.9 |
| 5 | #10360.00 | 51.5 PK | 68.2 | -16.7 | 1.46 H | 261 | 39.9 | 11.6 |
| 6 | 15540.00 | 44.5 PK | 74.0 | -29.5 | 1.39 H | 254 | 32.7 | 11.8 |
| 7 | 15540.00 | 33.0 AV | 54.0 | -21.0 | 1.39 H | 254 | 21.2 | 11.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

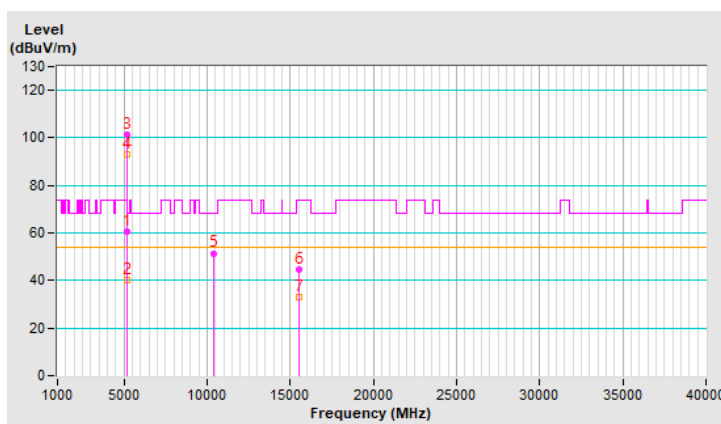


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 36 : 5180 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 70.3 PK | 74.0 | -3.7 | 1.33 V | 278 | 68.3 | 2.0 |
| 2 | 5150.00 | 52.4 AV | 54.0 | -1.6 | 1.33 V | 278 | 50.4 | 2.0 |
| 3 | *5180.00 | 110.6 PK | | | 1.33 V | 278 | 108.7 | 1.9 |
| 4 | *5180.00 | 101.7 AV | | | 1.33 V | 278 | 99.8 | 1.9 |
| 5 | #10360.00 | 50.8 PK | 68.2 | -17.4 | 1.45 V | 252 | 39.2 | 11.6 |
| 6 | 15540.00 | 44.6 PK | 74.0 | -29.4 | 1.45 V | 248 | 32.8 | 11.8 |
| 7 | 15540.00 | 33.5 AV | 54.0 | -20.5 | 1.45 V | 248 | 21.7 | 11.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

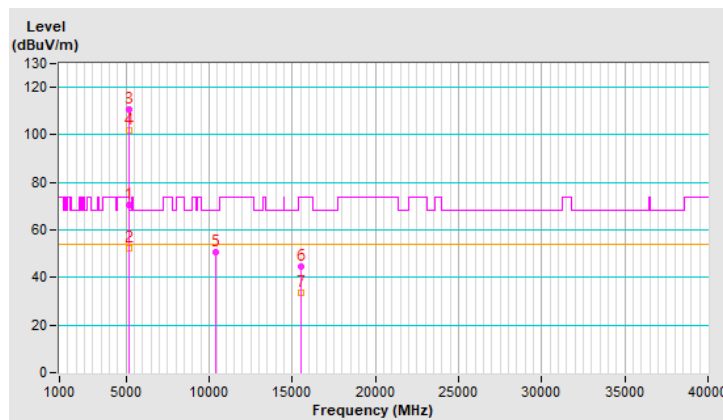


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 40 : 5200 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5149.90 | 62.0 PK | 74.0 | -12.0 | 1.06 H | 207 | 60.0 | 2.0 |
| 2 | 5149.90 | 44.4 AV | 54.0 | -9.6 | 1.06 H | 207 | 42.4 | 2.0 |
| 3 | *5200.00 | 107.0 PK | | | 1.06 H | 207 | 105.2 | 1.8 |
| 4 | *5200.00 | 97.8 AV | | | 1.06 H | 207 | 96.0 | 1.8 |
| 5 | 5352.20 | 50.0 PK | 74.0 | -24.0 | 1.06 H | 207 | 48.3 | 1.7 |
| 6 | 5352.20 | 37.4 AV | 54.0 | -16.6 | 1.06 H | 207 | 35.7 | 1.7 |
| 7 | #10400.00 | 50.3 PK | 68.2 | -17.9 | 1.41 H | 263 | 38.5 | 11.8 |
| 8 | 15600.00 | 44.4 PK | 74.0 | -29.6 | 1.40 H | 264 | 32.7 | 11.7 |
| 9 | 15600.00 | 33.3 AV | 54.0 | -20.7 | 1.40 H | 264 | 21.6 | 11.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

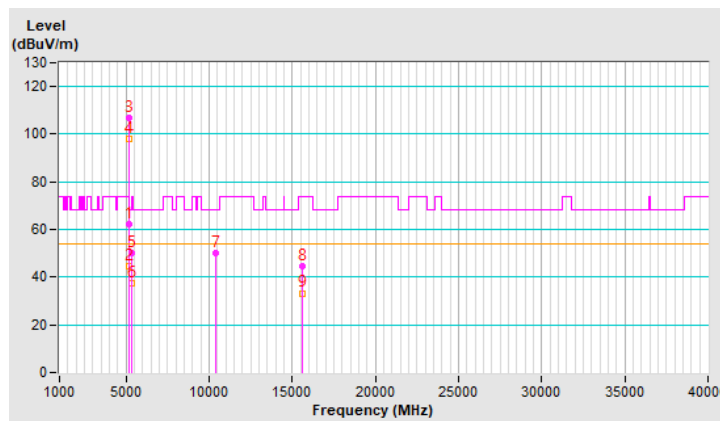


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 40 : 5200 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5149.90 | 71.9 PK | 74.0 | -2.1 | 1.00 V | 0 | 69.9 | 2.0 |
| 2 | 5149.90 | 51.0 AV | 54.0 | -3.0 | 1.00 V | 0 | 49.0 | 2.0 |
| 3 | *5200.00 | 116.2 PK | | | 1.39 V | 88 | 114.4 | 1.8 |
| 4 | *5200.00 | 106.5 AV | | | 1.39 V | 88 | 104.7 | 1.8 |
| 5 | 5352.20 | 51.7 PK | 74.0 | -22.3 | 1.00 V | 0 | 50.0 | 1.7 |
| 6 | 5352.20 | 39.7 AV | 54.0 | -14.3 | 1.00 V | 0 | 38.0 | 1.7 |
| 7 | #10400.00 | 52.3 PK | 68.2 | -15.9 | 1.44 V | 241 | 40.5 | 11.8 |
| 8 | 15600.00 | 46.4 PK | 74.0 | -27.6 | 1.36 V | 252 | 34.7 | 11.7 |
| 9 | 15600.00 | 35.4 AV | 54.0 | -18.6 | 1.36 V | 252 | 23.7 | 11.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

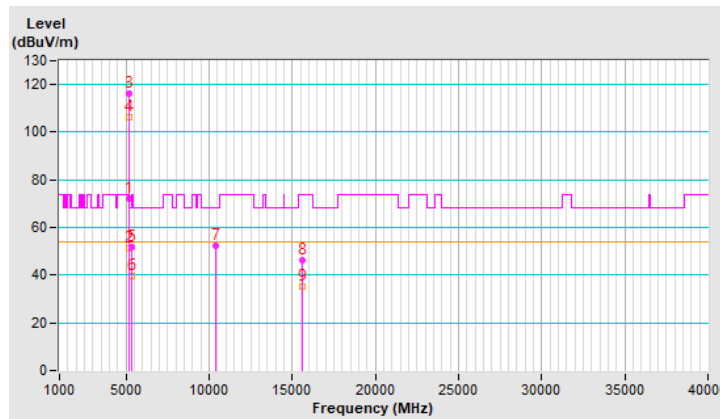


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 48 : 5240 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5240.00 | 106.9 PK | | | 1.00 H | 212 | 105.2 | 1.7 |
| 2 | *5240.00 | 97.9 AV | | | 1.00 H | 212 | 96.2 | 1.7 |
| 3 | 5350.00 | 50.5 PK | 74.0 | -23.5 | 1.00 H | 212 | 48.8 | 1.7 |
| 4 | 5350.00 | 37.8 AV | 54.0 | -16.2 | 1.00 H | 212 | 36.1 | 1.7 |
| 5 | #10480.00 | 50.4 PK | 68.2 | -17.8 | 1.48 H | 237 | 38.6 | 11.8 |
| 6 | 15720.00 | 44.7 PK | 74.0 | -29.3 | 1.49 H | 264 | 33.1 | 11.6 |
| 7 | 15720.00 | 33.6 AV | 54.0 | -20.4 | 1.49 H | 264 | 22.0 | 11.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

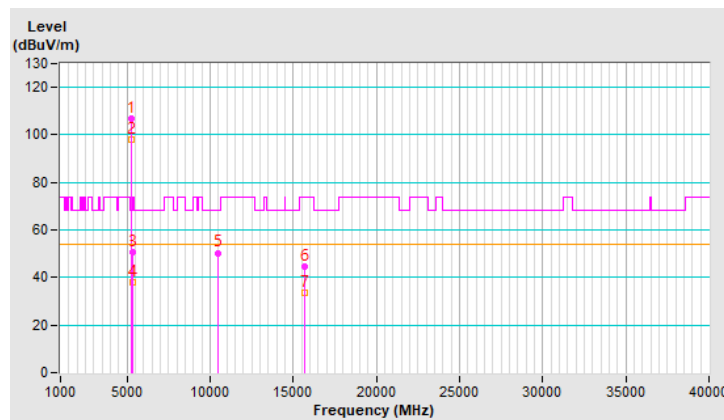


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 48 : 5240 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5240.00 | 115.4 PK | | | 1.35 V | 83 | 113.7 | 1.7 |
| 2 | *5240.00 | 106.8 AV | | | 1.35 V | 83 | 105.1 | 1.7 |
| 3 | 5350.00 | 52.6 PK | 74.0 | -21.4 | 1.35 V | 83 | 50.9 | 1.7 |
| 4 | 5350.00 | 41.5 AV | 54.0 | -12.5 | 1.35 V | 83 | 39.8 | 1.7 |
| 5 | #10480.00 | 52.4 PK | 68.2 | -15.8 | 1.46 V | 252 | 40.6 | 11.8 |
| 6 | 15720.00 | 46.6 PK | 74.0 | -27.4 | 1.34 V | 254 | 35.0 | 11.6 |
| 7 | 15720.00 | 35.4 AV | 54.0 | -18.6 | 1.34 V | 254 | 23.8 | 11.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

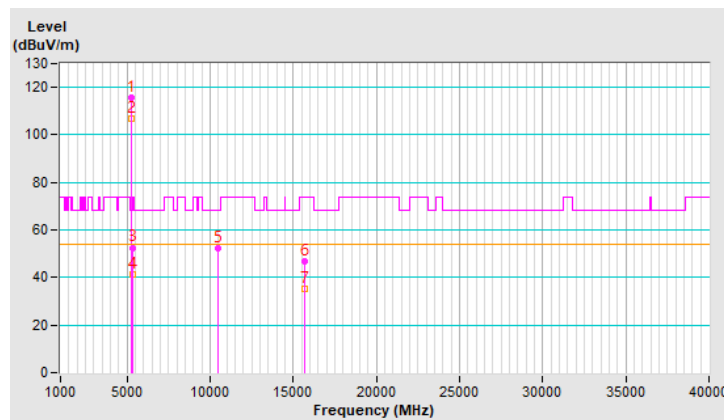


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 52 : 5260 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 51.0 PK | 74.0 | -23.0 | 1.07 H | 209 | 49.0 | 2.0 |
| 2 | 5150.00 | 38.3 AV | 54.0 | -15.7 | 1.07 H | 209 | 36.3 | 2.0 |
| 3 | *5260.00 | 107.0 PK | | | 1.07 H | 209 | 105.5 | 1.5 |
| 4 | *5260.00 | 97.5 AV | | | 1.07 H | 209 | 96.0 | 1.5 |
| 5 | #10520.00 | 50.3 PK | 68.2 | -17.9 | 1.46 H | 266 | 38.6 | 11.7 |
| 6 | 15780.00 | 44.6 PK | 74.0 | -29.4 | 1.40 H | 244 | 33.3 | 11.3 |
| 7 | 15780.00 | 33.4 AV | 54.0 | -20.6 | 1.40 H | 244 | 22.1 | 11.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

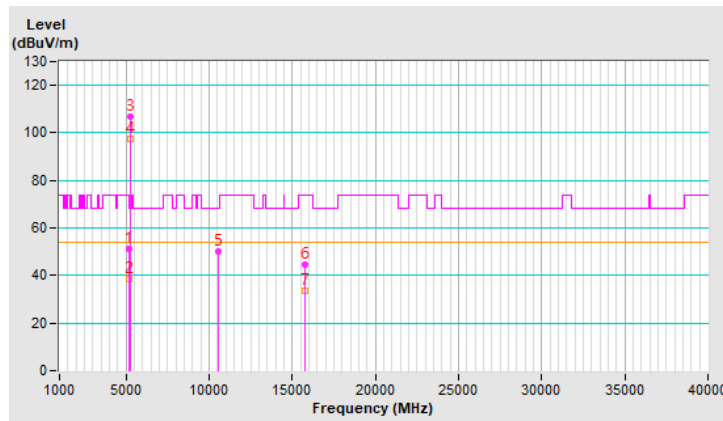


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 52 : 5260 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 53.8 PK | 74.0 | -20.2 | 1.06 V | 135 | 51.8 | 2.0 |
| 2 | 5150.00 | 41.9 AV | 54.0 | -12.1 | 1.06 V | 135 | 39.9 | 2.0 |
| 3 | *5260.00 | 115.1 PK | | | 1.06 V | 135 | 113.6 | 1.5 |
| 4 | *5260.00 | 106.8 AV | | | 1.06 V | 135 | 105.3 | 1.5 |
| 5 | #10520.00 | 52.4 PK | 68.2 | -15.8 | 1.46 V | 241 | 40.7 | 11.7 |
| 6 | 15780.00 | 46.5 PK | 74.0 | -27.5 | 1.34 V | 241 | 35.2 | 11.3 |
| 7 | 15780.00 | 35.6 AV | 54.0 | -18.4 | 1.34 V | 241 | 24.3 | 11.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

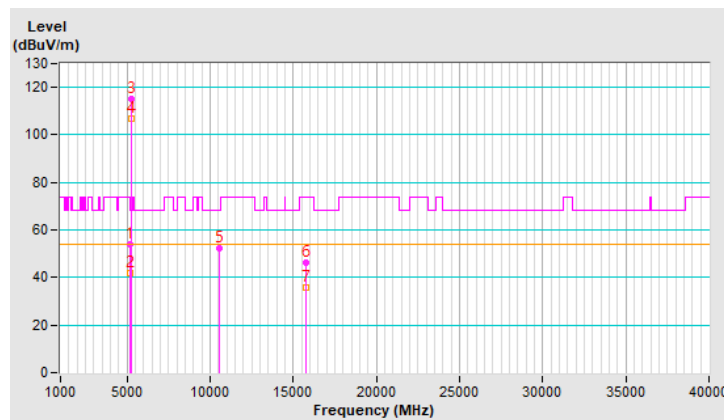


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 60 : 5300 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5300.00 | 106.9 PK | | | 1.08 H | 205 | 105.4 | 1.5 |
| 2 | *5300.00 | 97.7 AV | | | 1.08 H | 205 | 96.2 | 1.5 |
| 3 | 10600.00 | 52.5 PK | 74.0 | -21.5 | 1.43 H | 272 | 40.8 | 11.7 |
| 4 | 10600.00 | 42.4 AV | 54.0 | -11.6 | 1.43 H | 272 | 30.7 | 11.7 |
| 5 | 15900.00 | 47.2 PK | 74.0 | -26.8 | 1.31 H | 232 | 36.2 | 11.0 |
| 6 | 15900.00 | 36.0 AV | 54.0 | -18.0 | 1.31 H | 232 | 25.0 | 11.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

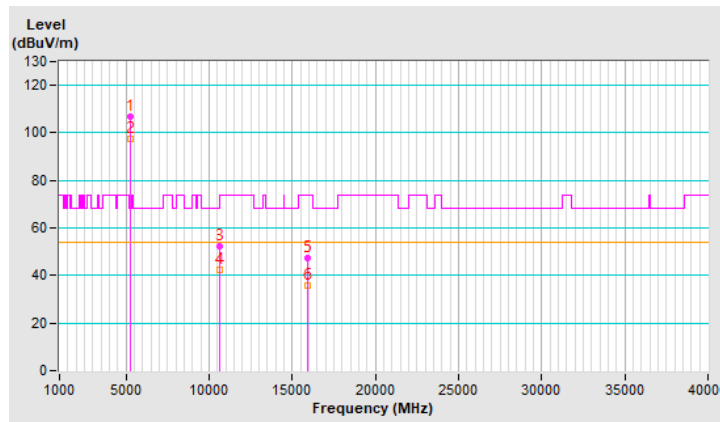


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 60 : 5300 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1 | *5300.00 | 115.7 PK | | | 1.09 V | 143 | 114.2 | 1.5 |
| 2 | *5300.00 | 107.1 AV | | | 1.09 V | 143 | 105.6 | 1.5 |
| 3 | 10600.00 | 52.4 PK | 74.0 | -21.6 | 1.52 V | 258 | 40.7 | 11.7 |
| 4 | 10600.00 | 42.3 AV | 54.0 | -11.7 | 1.52 V | 258 | 30.6 | 11.7 |
| 5 | 15900.00 | 46.5 PK | 74.0 | -27.5 | 1.34 V | 241 | 35.5 | 11.0 |
| 6 | 15900.00 | 35.5 AV | 54.0 | -18.5 | 1.34 V | 241 | 24.5 | 11.0 |

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

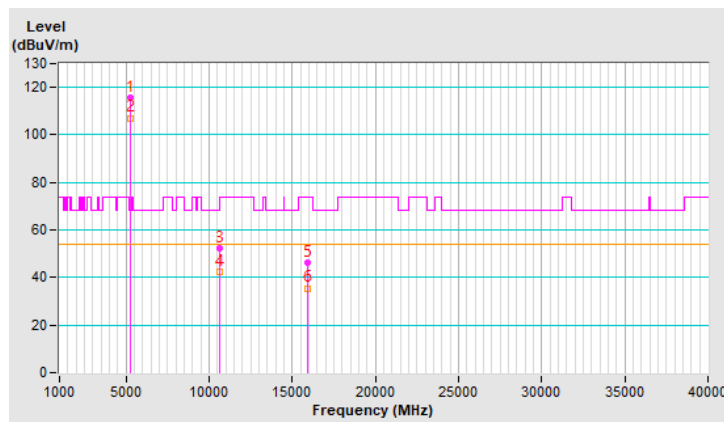


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 64 : 5320 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5320.00 | 104.7 PK | | | 1.08 H | 22 | 103.1 | 1.6 |
| 2 | *5320.00 | 96.5 AV | | | 1.08 H | 22 | 94.9 | 1.6 |
| 3 | 5350.00 | 65.4 PK | 74.0 | -8.6 | 1.08 H | 22 | 63.7 | 1.7 |
| 4 | 5350.00 | 50.4 AV | 54.0 | -3.6 | 1.08 H | 22 | 48.7 | 1.7 |
| 5 | 10640.00 | 52.7 PK | 74.0 | -21.3 | 1.48 H | 262 | 41.0 | 11.7 |
| 6 | 10640.00 | 42.8 AV | 54.0 | -11.2 | 1.48 H | 262 | 31.1 | 11.7 |
| 7 | 15960.00 | 46.8 PK | 74.0 | -27.2 | 1.37 H | 244 | 35.5 | 11.3 |
| 8 | 15960.00 | 35.7 AV | 54.0 | -18.3 | 1.37 H | 244 | 24.4 | 11.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

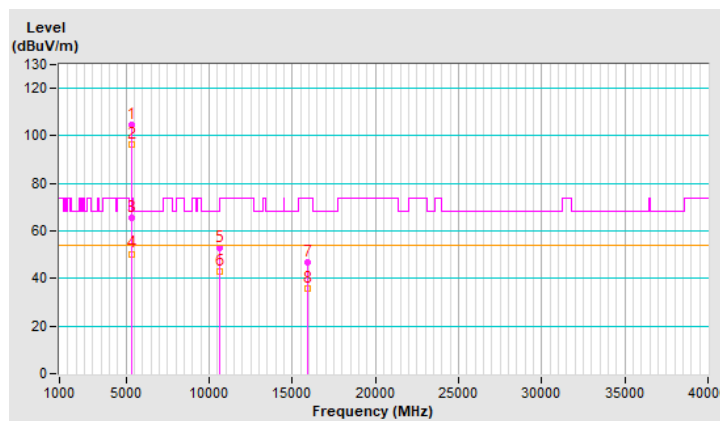


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 64 : 5320 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5320.00 | 101.6 PK | | | 1.38 V | 252 | 100.0 | 1.6 |
| 2 | *5320.00 | 93.1 AV | | | 1.38 V | 252 | 91.5 | 1.6 |
| 3 | 5350.00 | 69.8 PK | 74.0 | -4.2 | 1.38 V | 252 | 68.1 | 1.7 |
| 4 | 5350.00 | 52.3 AV | 54.0 | -1.7 | 1.38 V | 252 | 50.6 | 1.7 |
| 5 | 10640.00 | 52.3 PK | 74.0 | -21.7 | 1.53 V | 254 | 40.6 | 11.7 |
| 6 | 10640.00 | 42.5 AV | 54.0 | -11.5 | 1.53 V | 254 | 30.8 | 11.7 |
| 7 | 15960.00 | 46.2 PK | 74.0 | -27.8 | 1.35 V | 236 | 34.9 | 11.3 |
| 8 | 15960.00 | 35.4 AV | 54.0 | -18.6 | 1.35 V | 236 | 24.1 | 11.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

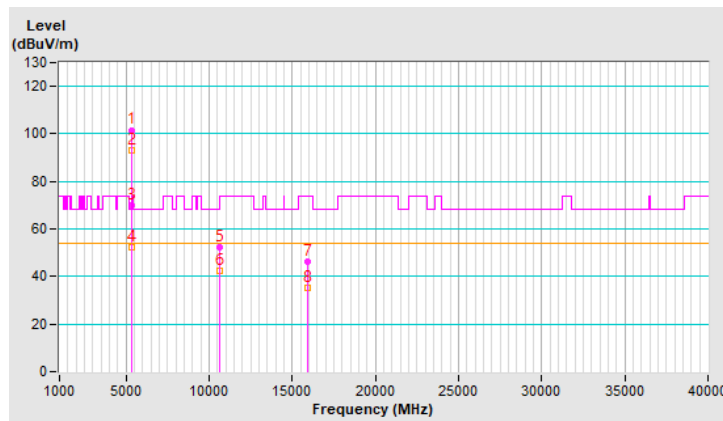


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 100 : 5500 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 49.1 PK | 74.0 | -24.9 | 1.04 H | 27 | 47.3 | 1.8 |
| 2 | 5460.00 | 38.0 AV | 54.0 | -16.0 | 1.04 H | 27 | 36.2 | 1.8 |
| 3 | #5470.00 | 52.9 PK | 68.2 | -15.3 | 1.04 H | 27 | 51.1 | 1.8 |
| 4 | *5500.00 | 100.3 PK | | | 1.04 H | 27 | 98.6 | 1.7 |
| 5 | *5500.00 | 92.1 AV | | | 1.04 H | 27 | 90.4 | 1.7 |
| 6 | 11000.00 | 53.3 PK | 74.0 | -20.7 | 1.51 H | 251 | 40.9 | 12.4 |
| 7 | 11000.00 | 43.2 AV | 54.0 | -10.8 | 1.51 H | 251 | 30.8 | 12.4 |
| 8 | #16500.00 | 46.9 PK | 68.2 | -21.3 | 1.40 H | 258 | 33.2 | 13.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

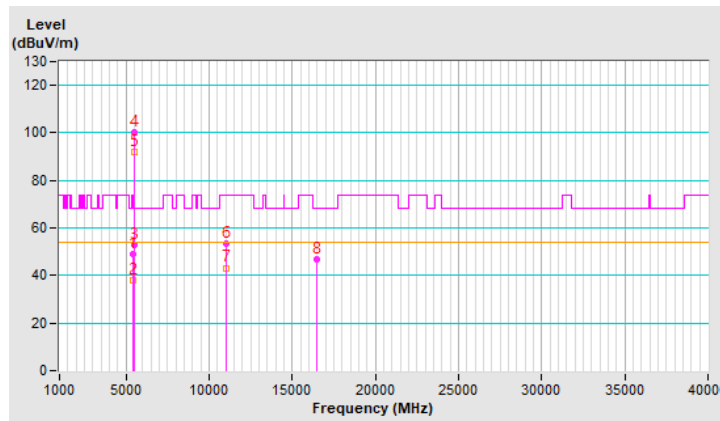


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 100 : 5500 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 57.4 PK | 74.0 | -16.6 | 1.38 V | 255 | 55.6 | 1.8 |
| 2 | 5460.00 | 48.0 AV | 54.0 | -6.0 | 1.38 V | 255 | 46.2 | 1.8 |
| 3 | #5470.00 | 67.4 PK | 68.2 | -0.8 | 1.38 V | 255 | 65.6 | 1.8 |
| 4 | *5500.00 | 100.8 PK | | | 1.38 V | 255 | 99.1 | 1.7 |
| 5 | *5500.00 | 91.9 AV | | | 1.38 V | 255 | 90.2 | 1.7 |
| 6 | 11000.00 | 50.4 PK | 74.0 | -23.6 | 1.34 V | 254 | 38.0 | 12.4 |
| 7 | 11000.00 | 40.4 AV | 54.0 | -13.6 | 1.34 V | 254 | 28.0 | 12.4 |
| 8 | #16500.00 | 46.6 PK | 68.2 | -21.6 | 1.36 V | 214 | 32.9 | 13.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

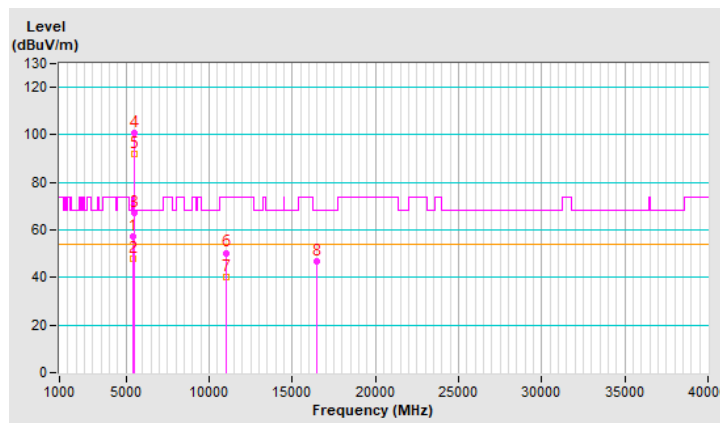


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 116 : 5580 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5580.00 | 100.2 PK | | | 1.03 H | 42 | 98.4 | 1.8 |
| 2 | *5580.00 | 92.2 AV | | | 1.03 H | 42 | 90.4 | 1.8 |
| 3 | 11160.00 | 52.6 PK | 74.0 | -21.4 | 1.52 H | 264 | 40.6 | 12.0 |
| 4 | 11160.00 | 42.9 AV | 54.0 | -11.1 | 1.52 H | 264 | 30.9 | 12.0 |
| 5 | #16740.00 | 47.6 PK | 68.2 | -20.6 | 1.42 H | 253 | 32.4 | 15.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

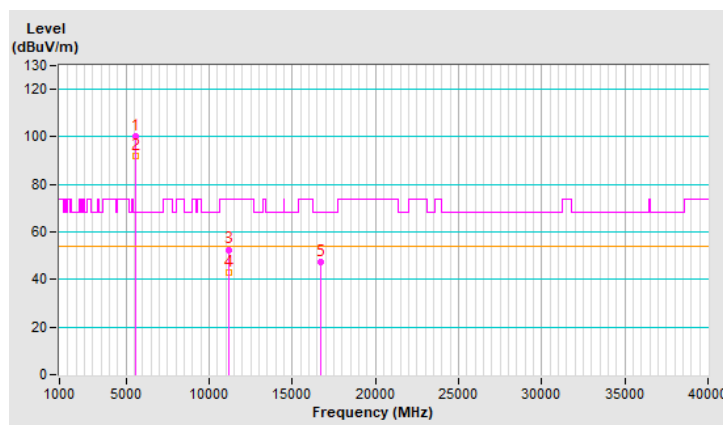


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 116 : 5580 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5580.00 | 111.0 PK | | | 1.31 V | 238 | 109.2 | 1.8 |
| 2 | *5580.00 | 101.8 AV | | | 1.31 V | 238 | 100.0 | 1.8 |
| 3 | 11160.00 | 52.3 PK | 74.0 | -21.7 | 1.29 V | 252 | 40.3 | 12.0 |
| 4 | 11160.00 | 42.5 AV | 54.0 | -11.5 | 1.29 V | 252 | 30.5 | 12.0 |
| 5 | #16740.00 | 46.2 PK | 68.2 | -22.0 | 1.32 V | 211 | 31.0 | 15.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

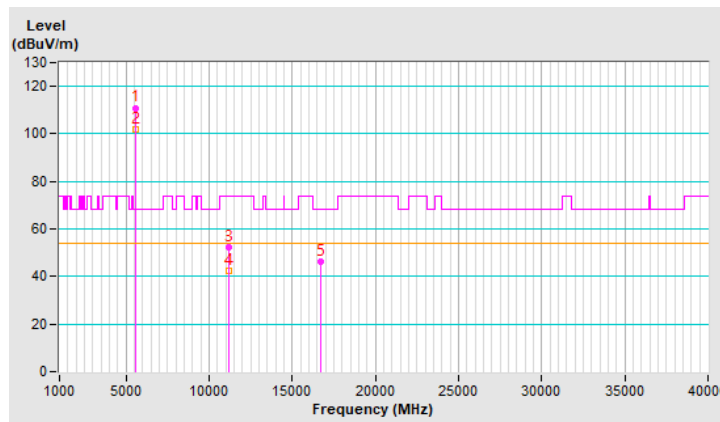


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 140 : 5700 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5700.00 | 100.8 PK | | | 1.06 H | 32 | 98.8 | 2.0 |
| 2 | *5700.00 | 92.6 AV | | | 1.06 H | 32 | 90.6 | 2.0 |
| 3 | #5725.00 | 53.9 PK | 68.2 | -14.3 | 1.06 H | 32 | 51.8 | 2.1 |
| 4 | 11400.00 | 52.6 PK | 74.0 | -21.4 | 1.43 H | 255 | 39.9 | 12.7 |
| 5 | 11400.00 | 42.9 AV | 54.0 | -11.1 | 1.43 H | 255 | 30.2 | 12.7 |
| 6 | #17100.00 | 46.8 PK | 68.2 | -21.4 | 1.43 H | 237 | 30.5 | 16.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

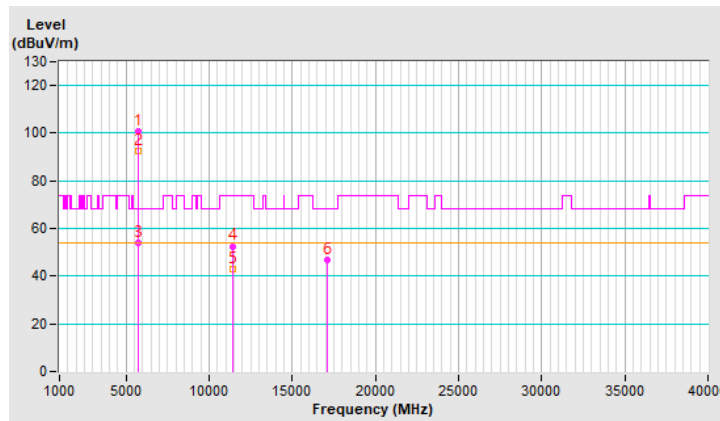


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 140 : 5700 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5700.00 | 109.3 PK | | | 1.31 V | 238 | 107.3 | 2.0 |
| 2 | *5700.00 | 100.1 AV | | | 1.31 V | 238 | 98.1 | 2.0 |
| 3 | #5725.00 | 66.1 PK | 68.2 | -2.1 | 1.31 V | 238 | 64.0 | 2.1 |
| 4 | 11400.00 | 50.3 PK | 74.0 | -23.7 | 1.36 V | 245 | 37.6 | 12.7 |
| 5 | 11400.00 | 40.5 AV | 54.0 | -13.5 | 1.36 V | 245 | 27.8 | 12.7 |
| 6 | #17100.00 | 44.4 PK | 68.2 | -23.8 | 1.33 V | 250 | 28.1 | 16.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

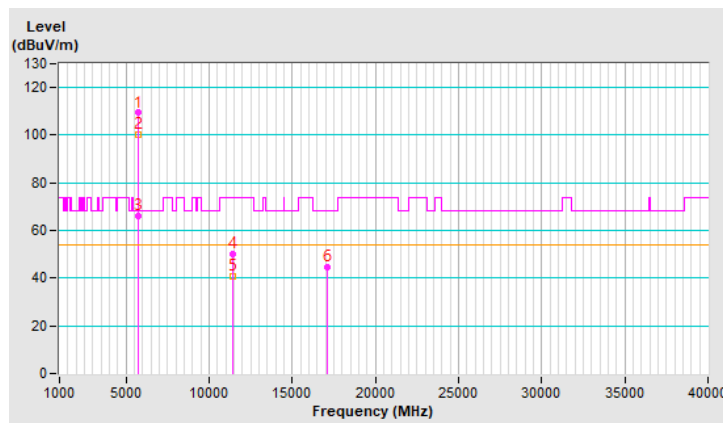


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 144 : 5720 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 47.7 PK | 74.0 | -26.3 | 1.08 H | 205 | 45.9 | 1.8 |
| 2 | 5460.00 | 37.5 AV | 54.0 | -16.5 | 1.08 H | 205 | 35.7 | 1.8 |
| 3 | #5470.00 | 46.4 PK | 68.2 | -21.8 | 1.08 H | 205 | 44.6 | 1.8 |
| 4 | *5720.00 | 107.2 PK | | | 1.08 H | 205 | 105.1 | 2.1 |
| 5 | *5720.00 | 97.7 AV | | | 1.08 H | 205 | 95.6 | 2.1 |
| 6 | #5850.00 | 48.4 PK | 68.2 | -19.8 | 1.08 H | 205 | 46.1 | 2.3 |
| 7 | 11440.00 | 52.3 PK | 74.0 | -21.7 | 1.44 H | 252 | 39.6 | 12.7 |
| 8 | 11440.00 | 42.5 AV | 54.0 | -11.5 | 1.44 H | 252 | 29.8 | 12.7 |
| 9 | #17160.00 | 46.3 PK | 68.2 | -21.9 | 1.41 H | 229 | 30.0 | 16.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

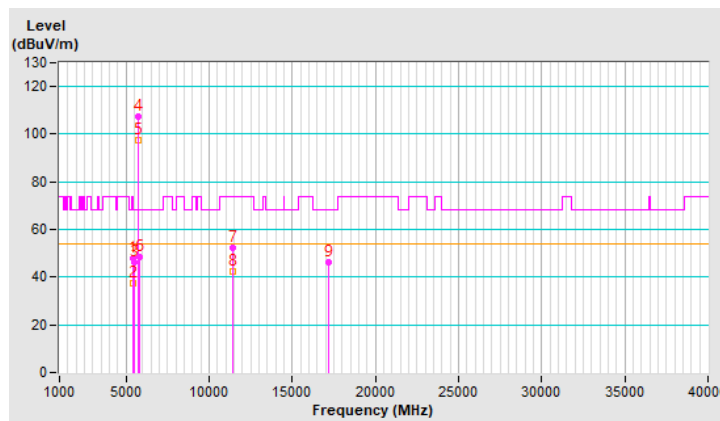


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 144 : 5720 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 50.4 PK | 74.0 | -23.6 | 1.31 V | 238 | 48.6 | 1.8 |
| 2 | 5460.00 | 39.1 AV | 54.0 | -14.9 | 1.31 V | 238 | 37.3 | 1.8 |
| 3 | #5470.00 | 50.2 PK | 68.2 | -18.0 | 1.31 V | 238 | 48.4 | 1.8 |
| 4 | *5720.00 | 111.7 PK | | | 1.31 V | 238 | 109.6 | 2.1 |
| 5 | *5720.00 | 102.7 AV | | | 1.31 V | 238 | 100.6 | 2.1 |
| 6 | #5850.00 | 51.4 PK | 68.2 | -16.8 | 1.31 V | 238 | 49.1 | 2.3 |
| 7 | 11440.00 | 52.4 PK | 74.0 | -21.6 | 1.28 V | 225 | 39.7 | 12.7 |
| 8 | 11440.00 | 42.4 AV | 54.0 | -11.6 | 1.28 V | 225 | 29.7 | 12.7 |
| 9 | #17160.00 | 46.6 PK | 68.2 | -21.6 | 1.34 V | 241 | 30.3 | 16.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

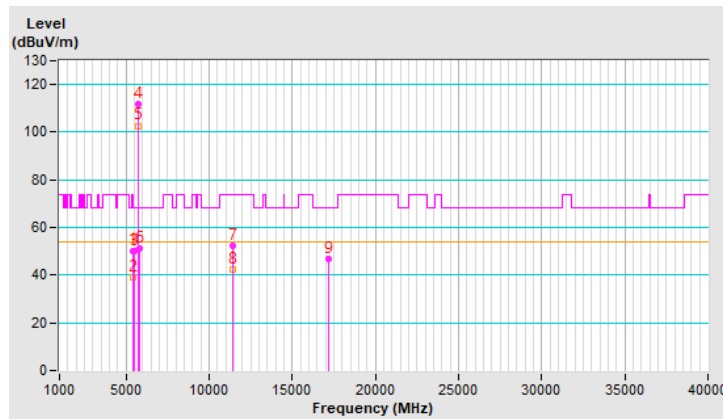


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 149 : 5745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5649.58 | 49.9 PK | 68.2 | -18.3 | 1.09 H | 18 | 47.9 | 2.0 |
| 2 | *5745.00 | 104.9 PK | | | 1.09 H | 18 | 102.8 | 2.1 |
| 3 | *5745.00 | 96.2 AV | | | 1.09 H | 18 | 94.1 | 2.1 |
| 4 | #5954.33 | 49.0 PK | 68.2 | -19.2 | 1.09 H | 18 | 46.4 | 2.6 |
| 5 | 11490.00 | 52.6 PK | 74.0 | -21.4 | 1.43 H | 257 | 39.8 | 12.8 |
| 6 | 11490.00 | 42.8 AV | 54.0 | -11.2 | 1.43 H | 257 | 30.0 | 12.8 |
| 7 | #17235.00 | 46.4 PK | 68.2 | -21.8 | 1.36 H | 258 | 29.9 | 16.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

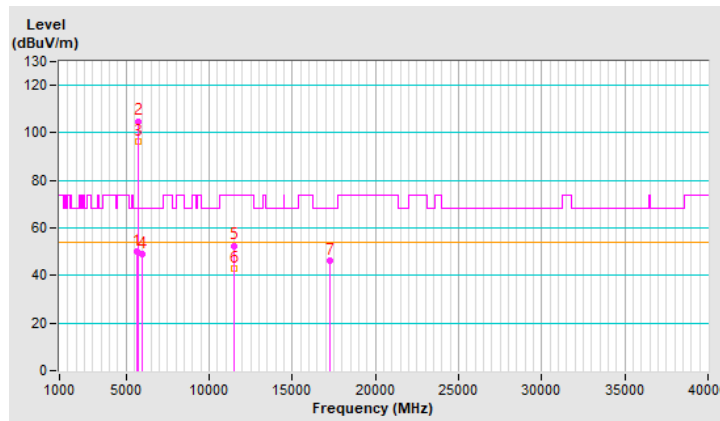


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 149 : 5745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5649.58 | 58.8 PK | 68.2 | -9.4 | 1.31 V | 238 | 56.8 | 2.0 |
| 2 | *5745.00 | 111.4 PK | | | 1.31 V | 238 | 109.3 | 2.1 |
| 3 | *5745.00 | 102.4 AV | | | 1.31 V | 238 | 100.3 | 2.1 |
| 4 | #5954.33 | 51.7 PK | 68.2 | -16.5 | 1.31 V | 238 | 49.1 | 2.6 |
| 5 | 11490.00 | 52.4 PK | 74.0 | -21.6 | 1.42 V | 214 | 39.6 | 12.8 |
| 6 | 11490.00 | 42.1 AV | 54.0 | -11.9 | 1.42 V | 214 | 29.3 | 12.8 |
| 7 | #17235.00 | 46.2 PK | 68.2 | -22.0 | 1.32 V | 241 | 29.7 | 16.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

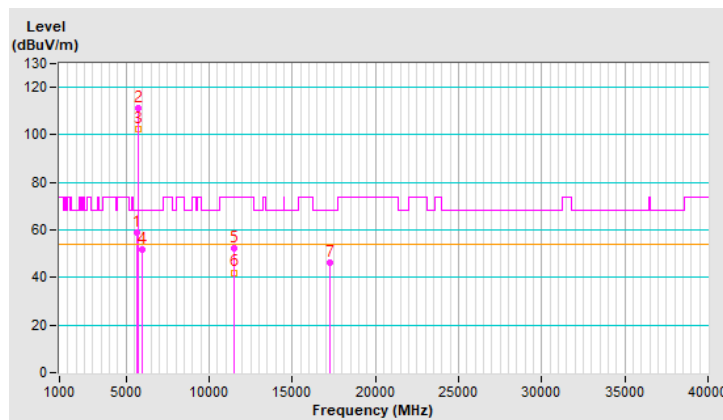


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 157 : 5785 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5648.46 | 49.4 PK | 68.2 | -18.8 | 1.06 H | 31 | 47.4 | 2.0 |
| 2 | *5785.00 | 104.5 PK | | | 1.06 H | 31 | 102.3 | 2.2 |
| 3 | *5785.00 | 95.9 AV | | | 1.06 H | 31 | 93.7 | 2.2 |
| 4 | #5929.77 | 49.1 PK | 68.2 | -19.1 | 1.06 H | 31 | 46.6 | 2.5 |
| 5 | 11570.00 | 53.0 PK | 74.0 | -21.0 | 1.49 H | 261 | 40.3 | 12.7 |
| 6 | 11570.00 | 43.2 AV | 54.0 | -10.8 | 1.49 H | 261 | 30.5 | 12.7 |
| 7 | #17355.00 | 46.8 PK | 68.2 | -21.4 | 1.41 H | 256 | 29.4 | 17.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

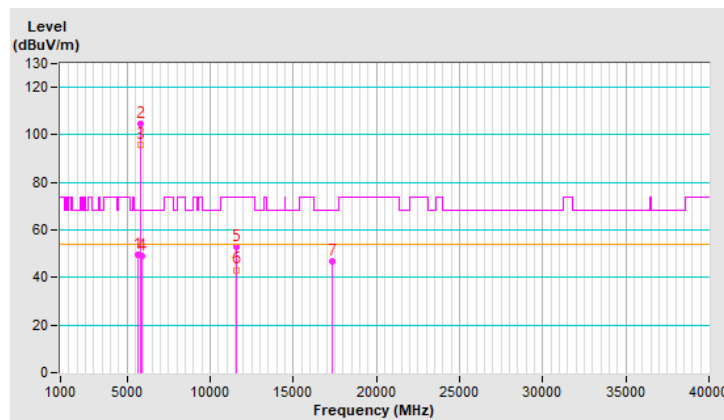


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 157 : 5785 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5648.46 | 51.8 PK | 68.2 | -16.4 | 1.31 V | 238 | 49.8 | 2.0 |
| 2 | *5785.00 | 111.5 PK | | | 1.31 V | 238 | 109.3 | 2.2 |
| 3 | *5785.00 | 102.4 AV | | | 1.31 V | 238 | 100.2 | 2.2 |
| 4 | #5929.77 | 52.0 PK | 68.2 | -16.2 | 1.31 V | 238 | 49.5 | 2.5 |
| 5 | 11570.00 | 52.6 PK | 74.0 | -21.4 | 1.42 V | 241 | 39.9 | 12.7 |
| 6 | 11570.00 | 42.4 AV | 54.0 | -11.6 | 1.42 V | 241 | 29.7 | 12.7 |
| 7 | #17355.00 | 46.6 PK | 68.2 | -21.6 | 1.55 V | 252 | 29.2 | 17.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

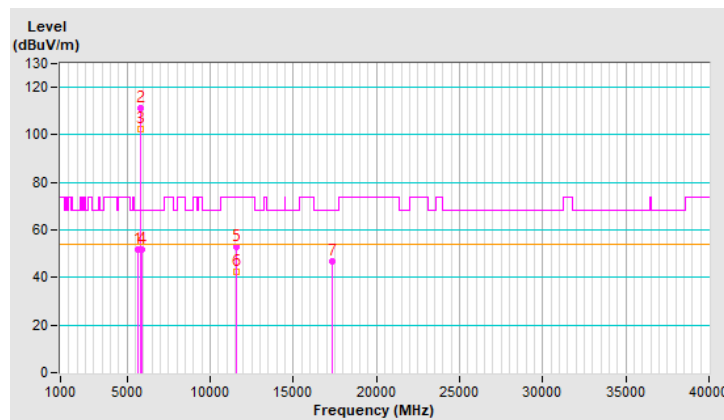


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 165 : 5825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5629.68 | 47.4 PK | 68.2 | -20.8 | 1.15 H | 12 | 45.5 | 1.9 |
| 2 | *5825.00 | 104.6 PK | | | 1.15 H | 12 | 102.3 | 2.3 |
| 3 | *5825.00 | 95.3 AV | | | 1.15 H | 12 | 93.0 | 2.3 |
| 4 | #5928.34 | 49.3 PK | 68.2 | -18.9 | 1.15 H | 12 | 46.8 | 2.5 |
| 5 | 11650.00 | 52.8 PK | 74.0 | -21.2 | 1.52 H | 265 | 40.3 | 12.5 |
| 6 | 11650.00 | 43.1 AV | 54.0 | -10.9 | 1.52 H | 265 | 30.6 | 12.5 |
| 7 | #17475.00 | 46.8 PK | 68.2 | -21.4 | 1.37 H | 254 | 28.1 | 18.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

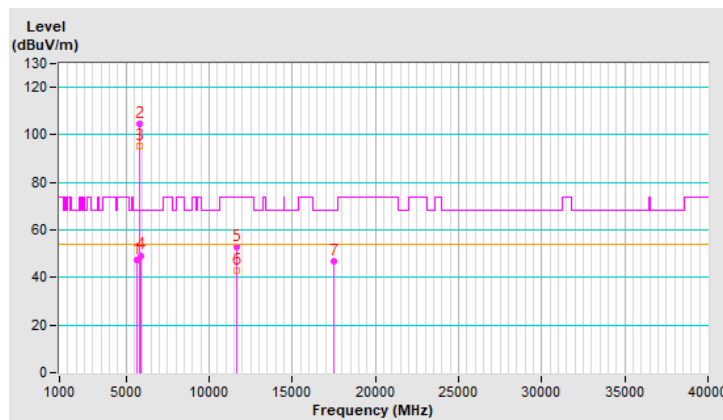


| | | | |
|-----------------------------|----------------|--|--|
| RF Mode | 802.11a | Channel | CH 165 : 5825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5629.68 | 50.7 PK | 68.2 | -17.5 | 1.31 V | 238 | 48.8 | 1.9 |
| 2 | *5825.00 | 110.2 PK | | | 1.31 V | 238 | 107.9 | 2.3 |
| 3 | *5825.00 | 102.3 AV | | | 1.31 V | 238 | 100.0 | 2.3 |
| 4 | #5928.34 | 56.7 PK | 68.2 | -11.5 | 1.31 V | 238 | 54.2 | 2.5 |
| 5 | 11650.00 | 52.6 PK | 74.0 | -21.4 | 1.32 V | 252 | 40.1 | 12.5 |
| 6 | 11650.00 | 42.6 AV | 54.0 | -11.4 | 1.32 V | 252 | 30.1 | 12.5 |
| 7 | #17475.00 | 46.3 PK | 68.2 | -21.9 | 1.45 V | 241 | 27.6 | 18.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

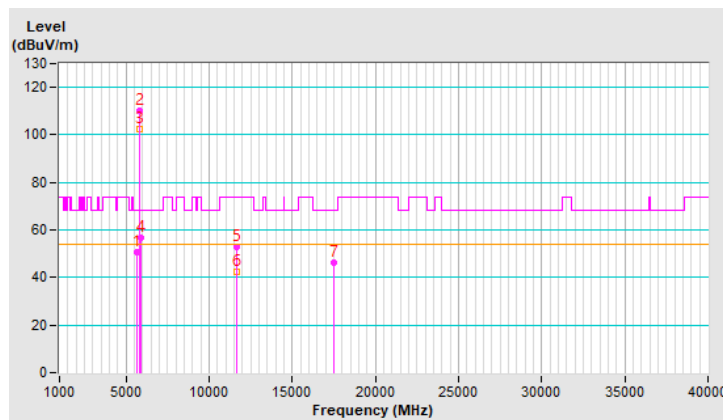


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 36 : 5180 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 51.1 PK | 74.0 | -22.9 | 1.01 H | 20 | 49.1 | 2.0 |
| 2 | 5150.00 | 40.8 AV | 54.0 | -13.2 | 1.01 H | 20 | 38.8 | 2.0 |
| 3 | *5180.00 | 101.6 PK | | | 1.01 H | 20 | 99.7 | 1.9 |
| 4 | *5180.00 | 93.7 AV | | | 1.01 H | 20 | 91.8 | 1.9 |
| 5 | #10360.00 | 53.3 PK | 68.2 | -14.9 | 1.48 H | 276 | 41.7 | 11.6 |
| 6 | 15540.00 | 46.6 PK | 74.0 | -27.4 | 1.43 H | 269 | 34.8 | 11.8 |
| 7 | 15540.00 | 35.5 AV | 54.0 | -18.5 | 1.43 H | 269 | 23.7 | 11.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

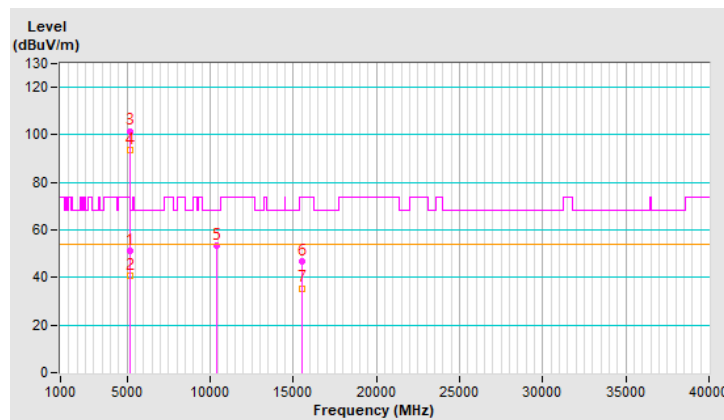


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 36 : 5180 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 67.1 PK | 74.0 | -6.9 | 1.31 V | 250 | 65.1 | 2.0 |
| 2 | 5150.00 | 52.1 AV | 54.0 | -1.9 | 1.31 V | 250 | 50.1 | 2.0 |
| 3 | *5180.00 | 111.5 PK | | | 1.31 V | 250 | 109.6 | 1.9 |
| 4 | *5180.00 | 100.3 AV | | | 1.31 V | 250 | 98.4 | 1.9 |
| 5 | #10360.00 | 50.4 PK | 68.2 | -17.8 | 1.33 V | 241 | 38.8 | 11.6 |
| 6 | 15540.00 | 44.3 PK | 74.0 | -29.7 | 1.41 V | 252 | 32.5 | 11.8 |
| 7 | 15540.00 | 34.2 AV | 54.0 | -19.8 | 1.41 V | 252 | 22.4 | 11.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

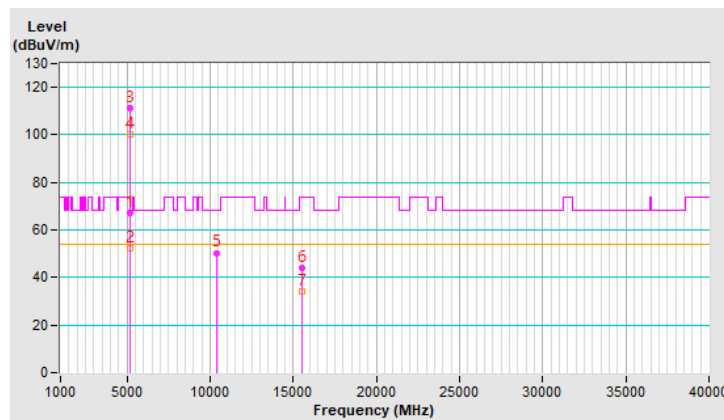


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 40 : 5200 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5200.00 | 105.9 PK | | | 1.05 H | 207 | 104.1 | 1.8 |
| 2 | *5200.00 | 96.1 AV | | | 1.05 H | 207 | 94.3 | 1.8 |
| 3 | #10400.00 | 52.4 PK | 68.2 | -15.8 | 1.57 H | 278 | 40.6 | 11.8 |
| 4 | 15600.00 | 47.4 PK | 74.0 | -26.6 | 1.36 H | 238 | 35.7 | 11.7 |
| 5 | 15600.00 | 36.3 AV | 54.0 | -17.7 | 1.36 H | 238 | 24.6 | 11.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

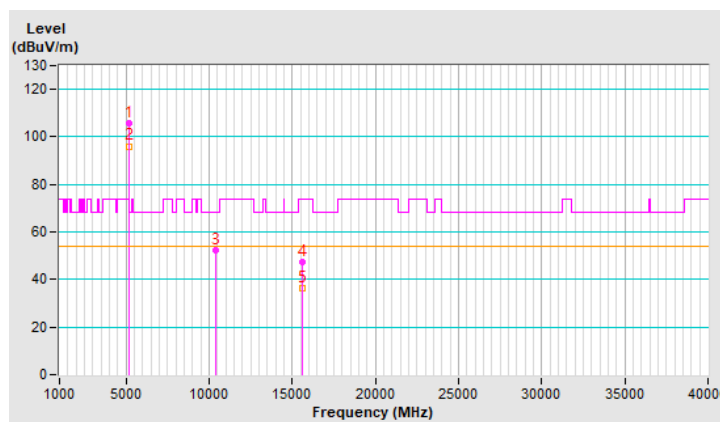


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 40 : 5200 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5200.00 | 115.4 PK | | | 1.31 V | 250 | 113.6 | 1.8 |
| 2 | *5200.00 | 103.6 AV | | | 1.31 V | 250 | 101.8 | 1.8 |
| 3 | #10400.00 | 52.3 PK | 68.2 | -15.9 | 1.26 V | 241 | 40.5 | 11.8 |
| 4 | 15600.00 | 46.4 PK | 74.0 | -27.6 | 1.30 V | 225 | 34.7 | 11.7 |
| 5 | 15600.00 | 36.5 AV | 54.0 | -17.5 | 1.30 V | 225 | 24.8 | 11.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

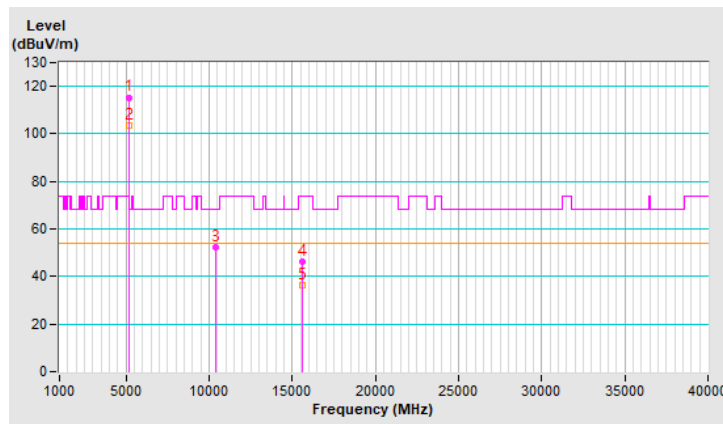


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 48 : 5240 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *5240.00 | 105.2 PK | | | 1.07 H | 214 | 103.5 | 1.7 |
| 2 | *5240.00 | 96.6 AV | | | 1.07 H | 214 | 94.9 | 1.7 |
| 3 | 5350.00 | 49.8 PK | 74.0 | -24.2 | 1.07 H | 214 | 48.1 | 1.7 |
| 4 | 5350.00 | 37.0 AV | 54.0 | -17.0 | 1.07 H | 214 | 35.3 | 1.7 |
| 5 | #10480.00 | 52.8 PK | 68.2 | -15.4 | 1.54 H | 275 | 41.0 | 11.8 |
| 6 | 15720.00 | 46.7 PK | 74.0 | -27.3 | 1.34 H | 262 | 35.1 | 11.6 |
| 7 | 15720.00 | 35.9 AV | 54.0 | -18.1 | 1.34 H | 262 | 24.3 | 11.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

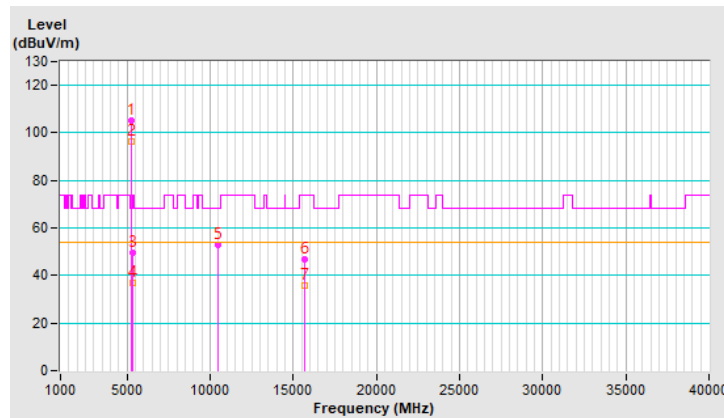


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 48 : 5240 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5240.00 | 113.7 PK | | | 1.31 V | 250 | 112.0 | 1.7 |
| 2 | *5240.00 | 102.8 AV | | | 1.31 V | 250 | 101.1 | 1.7 |
| 3 | 5350.00 | 50.7 PK | 74.0 | -23.3 | 1.31 V | 250 | 49.0 | 1.7 |
| 4 | 5350.00 | 40.5 AV | 54.0 | -13.5 | 1.31 V | 250 | 38.8 | 1.7 |
| 5 | #10480.00 | 52.4 PK | 68.2 | -15.8 | 1.24 V | 241 | 40.6 | 11.8 |
| 6 | 15720.00 | 46.6 PK | 74.0 | -27.4 | 1.35 V | 224 | 35.0 | 11.6 |
| 7 | 15720.00 | 36.4 AV | 54.0 | -17.6 | 1.35 V | 224 | 24.8 | 11.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

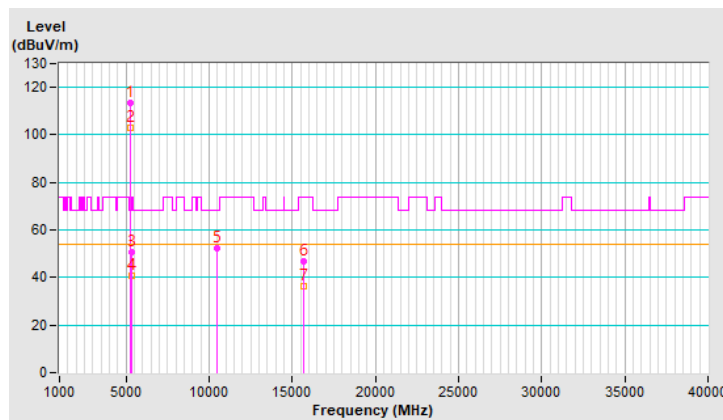


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 52 : 5260 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 49.1 PK | 74.0 | -24.9 | 1.03 H | 204 | 47.1 | 2.0 |
| 2 | 5150.00 | 38.4 AV | 54.0 | -15.6 | 1.03 H | 204 | 36.4 | 2.0 |
| 3 | *5260.00 | 106.3 PK | | | 1.03 H | 204 | 104.8 | 1.5 |
| 4 | *5260.00 | 96.5 AV | | | 1.03 H | 204 | 95.0 | 1.5 |
| 5 | #10520.00 | 52.6 PK | 68.2 | -15.6 | 1.53 H | 249 | 40.9 | 11.7 |
| 6 | 15780.00 | 46.7 PK | 74.0 | -27.3 | 1.35 H | 253 | 35.4 | 11.3 |
| 7 | 15780.00 | 35.8 AV | 54.0 | -18.2 | 1.35 H | 253 | 24.5 | 11.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

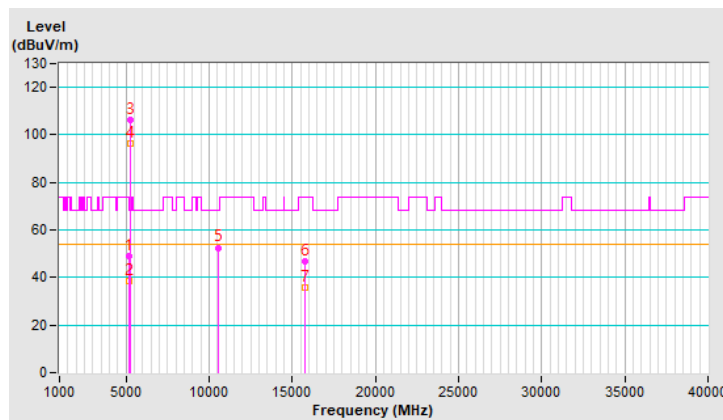


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 52 : 5260 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 53.4 PK | 74.0 | -20.6 | 1.31 V | 250 | 51.4 | 2.0 |
| 2 | 5150.00 | 40.4 AV | 54.0 | -13.6 | 1.31 V | 250 | 38.4 | 2.0 |
| 3 | *5260.00 | 114.8 PK | | | 1.31 V | 250 | 113.3 | 1.5 |
| 4 | *5260.00 | 103.6 AV | | | 1.31 V | 250 | 102.1 | 1.5 |
| 5 | #10520.00 | 52.3 PK | 68.2 | -15.9 | 1.33 V | 214 | 40.6 | 11.7 |
| 6 | 15780.00 | 46.5 PK | 74.0 | -27.5 | 1.32 V | 214 | 35.2 | 11.3 |
| 7 | 15780.00 | 36.5 AV | 54.0 | -17.5 | 1.32 V | 214 | 25.2 | 11.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

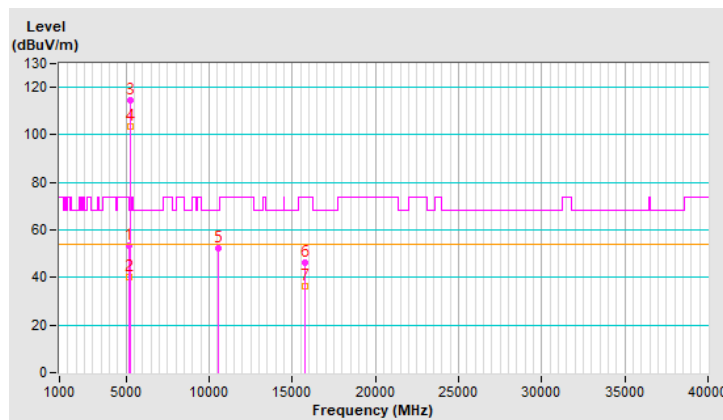


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 60 : 5300 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5300.00 | 104.6 PK | | | 1.06 H | 210 | 103.1 | 1.5 |
| 2 | *5300.00 | 95.0 AV | | | 1.06 H | 210 | 93.5 | 1.5 |
| 3 | 10600.00 | 52.7 PK | 74.0 | -21.3 | 1.56 H | 267 | 41.0 | 11.7 |
| 4 | 10600.00 | 43.3 AV | 54.0 | -10.7 | 1.56 H | 267 | 31.6 | 11.7 |
| 5 | 15900.00 | 47.4 PK | 74.0 | -26.6 | 1.35 H | 247 | 36.4 | 11.0 |
| 6 | 15900.00 | 36.3 AV | 54.0 | -17.7 | 1.35 H | 247 | 25.3 | 11.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

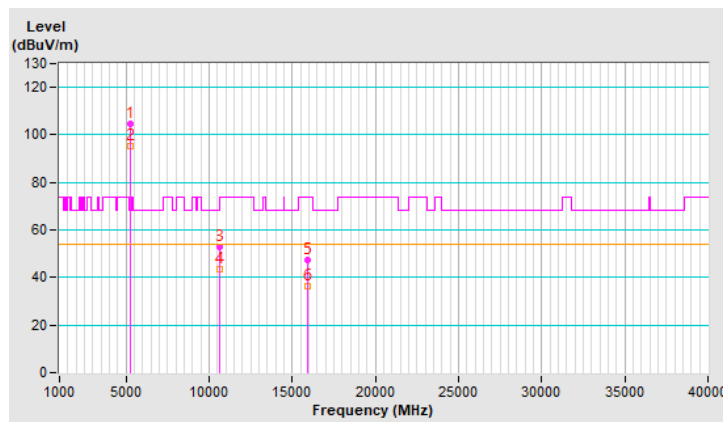


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 60 : 5300 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5300.00 | 114.5 PK | | | 1.31 V | 250 | 113.0 | 1.5 |
| 2 | *5300.00 | 103.6 AV | | | 1.31 V | 250 | 102.1 | 1.5 |
| 3 | 10600.00 | 52.4 PK | 74.0 | -21.6 | 1.22 V | 241 | 40.7 | 11.7 |
| 4 | 10600.00 | 42.4 AV | 54.0 | -11.6 | 1.22 V | 241 | 30.7 | 11.7 |
| 5 | 15900.00 | 46.4 PK | 74.0 | -27.6 | 1.36 V | 252 | 35.4 | 11.0 |
| 6 | 15900.00 | 36.6 AV | 54.0 | -17.4 | 1.36 V | 252 | 25.6 | 11.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

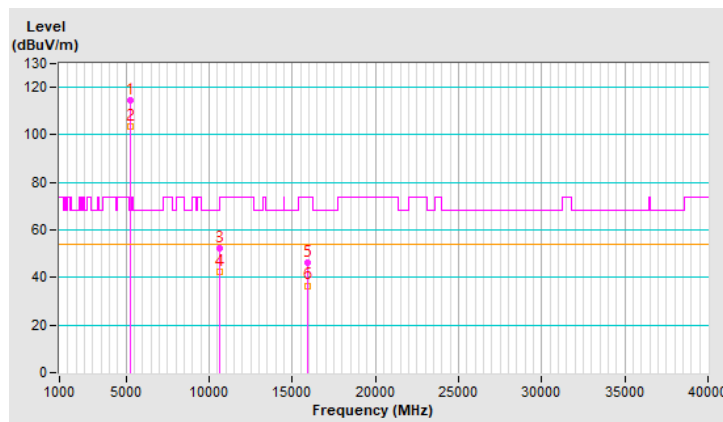


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 64 : 5320 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5320.00 | 101.7 PK | | | 1.04 H | 28 | 100.1 | 1.6 |
| 2 | *5320.00 | 92.3 AV | | | 1.04 H | 28 | 90.7 | 1.6 |
| 3 | 5350.00 | 48.4 PK | 74.0 | -25.6 | 1.04 H | 28 | 46.7 | 1.7 |
| 4 | 5350.00 | 40.2 AV | 54.0 | -13.8 | 1.04 H | 28 | 38.5 | 1.7 |
| 5 | 10640.00 | 52.5 PK | 74.0 | -21.5 | 1.48 H | 267 | 40.8 | 11.7 |
| 6 | 10640.00 | 42.9 AV | 54.0 | -11.1 | 1.48 H | 267 | 31.2 | 11.7 |
| 7 | 15960.00 | 47.2 PK | 74.0 | -26.8 | 1.36 H | 253 | 35.9 | 11.3 |
| 8 | 15960.00 | 36.1 AV | 54.0 | -17.9 | 1.36 H | 253 | 24.8 | 11.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

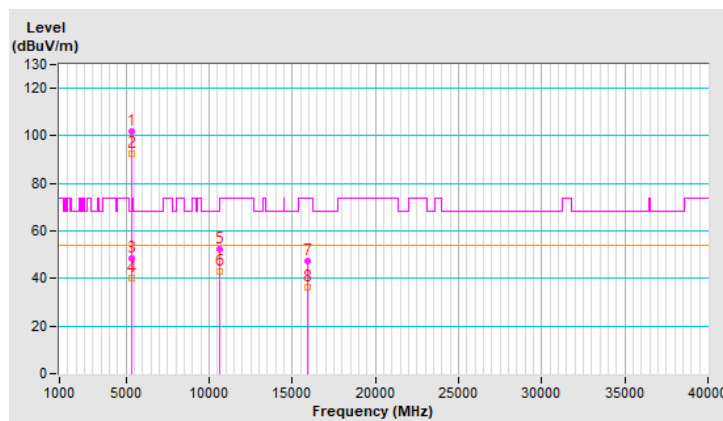


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 64 : 5320 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5320.00 | 112.5 PK | | | 1.31 V | 250 | 110.9 | 1.6 |
| 2 | *5320.00 | 102.3 AV | | | 1.31 V | 250 | 100.7 | 1.6 |
| 3 | 5350.00 | 66.6 PK | 74.0 | -7.4 | 1.31 V | 250 | 64.9 | 1.7 |
| 4 | 5350.00 | 52.1 AV | 54.0 | -1.9 | 1.31 V | 250 | 50.4 | 1.7 |
| 5 | 10640.00 | 50.4 PK | 74.0 | -23.6 | 1.36 V | 241 | 38.7 | 11.7 |
| 6 | 10640.00 | 41.2 AV | 54.0 | -12.8 | 1.36 V | 241 | 29.5 | 11.7 |
| 7 | 15960.00 | 45.4 PK | 74.0 | -28.6 | 1.32 V | 251 | 34.1 | 11.3 |
| 8 | 15960.00 | 35.5 AV | 54.0 | -18.5 | 1.32 V | 251 | 24.2 | 11.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

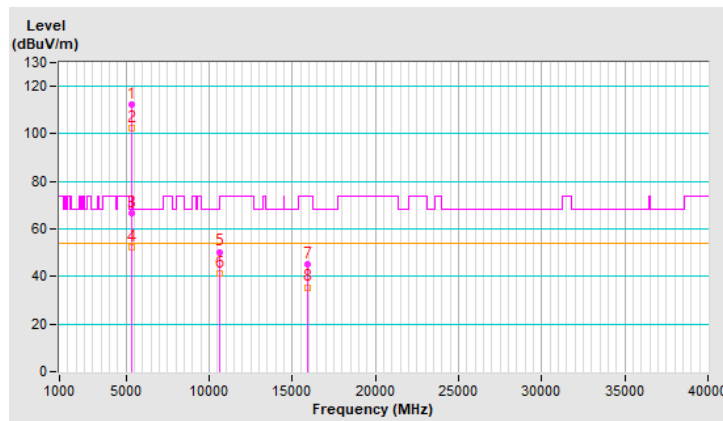


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 100 : 5500 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 50.0 PK | 74.0 | -24.0 | 1.03 H | 21 | 48.2 | 1.8 |
| 2 | 5460.00 | 38.0 AV | 54.0 | -16.0 | 1.03 H | 21 | 36.2 | 1.8 |
| 3 | #5470.00 | 51.7 PK | 68.2 | -16.5 | 1.03 H | 21 | 49.9 | 1.8 |
| 4 | *5500.00 | 102.2 PK | | | 1.03 H | 21 | 100.5 | 1.7 |
| 5 | *5500.00 | 93.0 AV | | | 1.03 H | 21 | 91.3 | 1.7 |
| 6 | 11000.00 | 52.2 PK | 74.0 | -21.8 | 1.49 H | 263 | 39.8 | 12.4 |
| 7 | 11000.00 | 42.4 AV | 54.0 | -11.6 | 1.49 H | 263 | 30.0 | 12.4 |
| 8 | #16500.00 | 47.0 PK | 68.2 | -21.2 | 1.38 H | 251 | 33.3 | 13.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

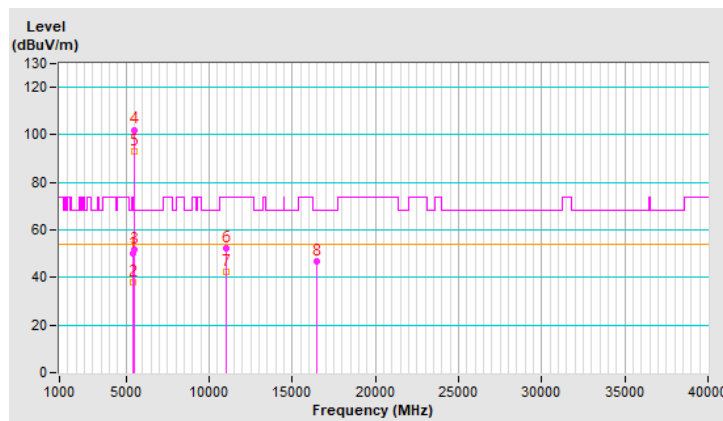


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 100 : 5500 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 57.8 PK | 74.0 | -16.2 | 1.31 V | 250 | 56.0 | 1.8 |
| 2 | 5460.00 | 45.6 AV | 54.0 | -8.4 | 1.31 V | 250 | 43.8 | 1.8 |
| 3 | #5470.00 | 66.3 PK | 68.2 | -1.9 | 1.31 V | 250 | 64.5 | 1.8 |
| 4 | *5500.00 | 111.3 PK | | | 1.31 V | 250 | 109.6 | 1.7 |
| 5 | *5500.00 | 101.1 AV | | | 1.31 V | 250 | 99.4 | 1.7 |
| 6 | 11000.00 | 51.4 PK | 74.0 | -22.6 | 1.25 V | 214 | 39.0 | 12.4 |
| 7 | 11000.00 | 41.2 AV | 54.0 | -12.8 | 1.25 V | 214 | 28.8 | 12.4 |
| 8 | #16500.00 | 46.4 PK | 68.2 | -21.8 | 1.30 V | 222 | 32.7 | 13.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

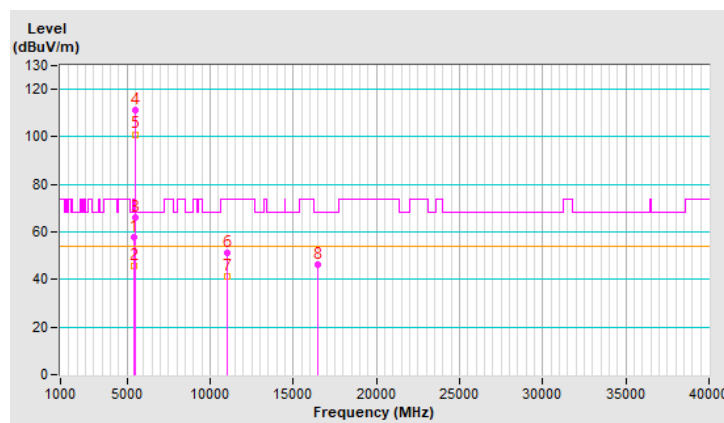


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 116 : 5580 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5580.00 | 101.8 PK | | | 1.05 H | 8 | 100.0 | 1.8 |
| 2 | *5580.00 | 92.5 AV | | | 1.05 H | 8 | 90.7 | 1.8 |
| 3 | 11160.00 | 52.5 PK | 74.0 | -21.5 | 1.54 H | 284 | 40.5 | 12.0 |
| 4 | 11160.00 | 42.4 AV | 54.0 | -11.6 | 1.54 H | 284 | 30.4 | 12.0 |
| 5 | #16740.00 | 46.7 PK | 68.2 | -21.5 | 1.33 H | 274 | 31.5 | 15.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

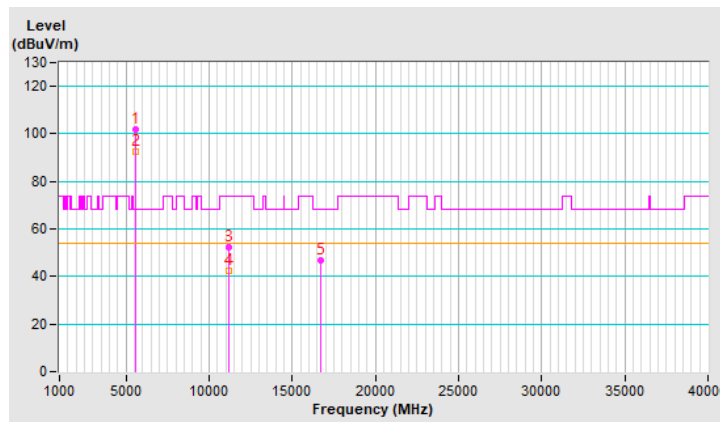


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 116 : 5580 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5580.00 | 112.8 PK | | | 1.31 V | 250 | 111.0 | 1.8 |
| 2 | *5580.00 | 102.6 AV | | | 1.31 V | 250 | 100.8 | 1.8 |
| 3 | 11160.00 | 52.3 PK | 74.0 | -21.7 | 1.32 V | 241 | 40.3 | 12.0 |
| 4 | 11160.00 | 42.4 AV | 54.0 | -11.6 | 1.32 V | 241 | 30.4 | 12.0 |
| 5 | #16740.00 | 46.4 PK | 68.2 | -21.8 | 1.31 V | 225 | 31.2 | 15.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

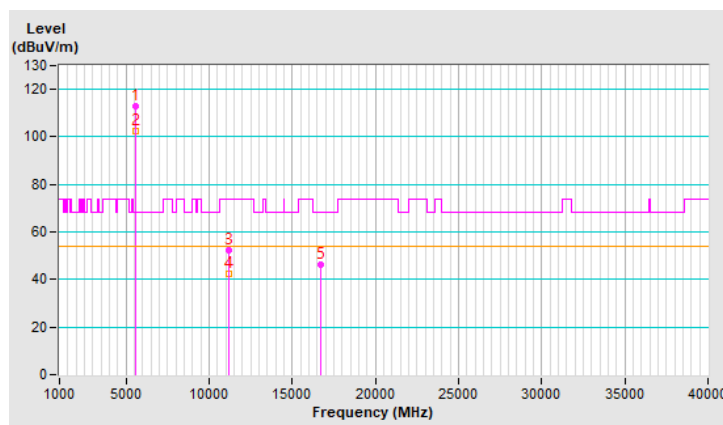


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 140 : 5700 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5700.00 | 101.6 PK | | | 1.04 H | 20 | 99.6 | 2.0 |
| 2 | *5700.00 | 92.1 AV | | | 1.04 H | 20 | 90.1 | 2.0 |
| 3 | #5725.00 | 48.3 PK | 68.2 | -19.9 | 1.04 H | 20 | 46.2 | 2.1 |
| 4 | 11400.00 | 53.3 PK | 74.0 | -20.7 | 1.49 H | 272 | 40.6 | 12.7 |
| 5 | 11400.00 | 43.3 AV | 54.0 | -10.7 | 1.49 H | 272 | 30.6 | 12.7 |
| 6 | #17100.00 | 46.5 PK | 68.2 | -21.7 | 1.37 H | 261 | 30.2 | 16.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

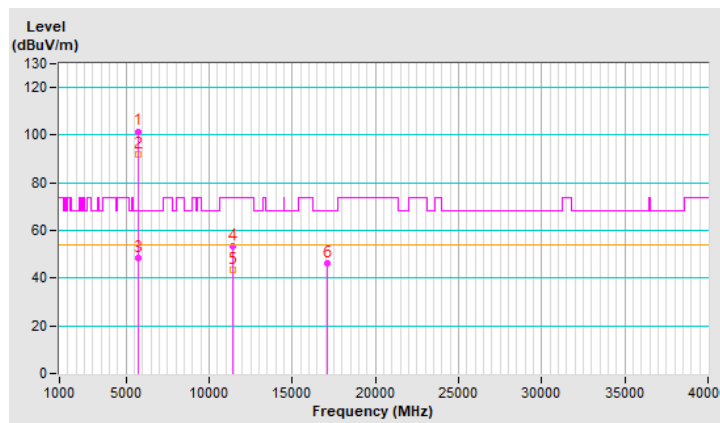


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 140 : 5700 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5700.00 | 111.9 PK | | | 1.31 V | 250 | 109.9 | 2.0 |
| 2 | *5700.00 | 101.7 AV | | | 1.31 V | 250 | 99.7 | 2.0 |
| 3 | #5725.00 | 66.7 PK | 68.2 | -1.5 | 1.31 V | 250 | 64.6 | 2.1 |
| 4 | 11400.00 | 50.2 PK | 74.0 | -23.8 | 1.32 V | 254 | 37.5 | 12.7 |
| 5 | 11400.00 | 40.4 AV | 54.0 | -13.6 | 1.32 V | 254 | 27.7 | 12.7 |
| 6 | #17100.00 | 44.4 PK | 68.2 | -23.8 | 1.25 V | 241 | 28.1 | 16.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

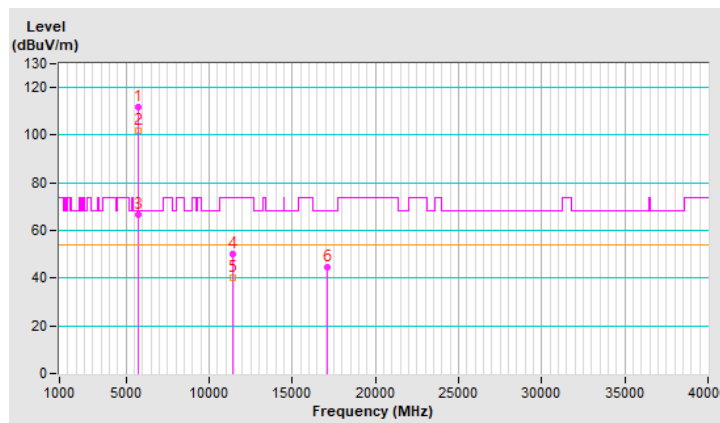


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 144 : 5720 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 48.5 PK | 74.0 | -25.5 | 1.02 H | 30 | 46.7 | 1.8 |
| 2 | 5460.00 | 40.6 AV | 54.0 | -13.4 | 1.02 H | 30 | 38.8 | 1.8 |
| 3 | #5470.00 | 50.4 PK | 68.2 | -17.8 | 1.02 H | 30 | 48.6 | 1.8 |
| 4 | *5720.00 | 101.9 PK | | | 1.02 H | 30 | 99.8 | 2.1 |
| 5 | *5720.00 | 92.2 AV | | | 1.02 H | 30 | 90.1 | 2.1 |
| 6 | #5850.00 | 51.4 PK | 68.2 | -16.8 | 1.02 H | 30 | 49.1 | 2.3 |
| 7 | 11440.00 | 52.5 PK | 74.0 | -21.5 | 1.60 H | 283 | 39.8 | 12.7 |
| 8 | 11440.00 | 42.6 AV | 54.0 | -11.4 | 1.60 H | 283 | 29.9 | 12.7 |
| 9 | #17160.00 | 47.2 PK | 68.2 | -21.0 | 1.28 H | 277 | 30.9 | 16.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

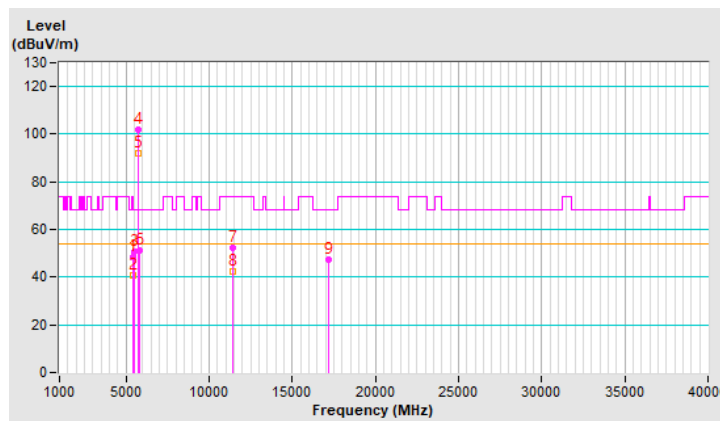


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 144 : 5720 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 51.8 PK | 74.0 | -22.2 | 1.31 V | 250 | 50.0 | 1.8 |
| 2 | 5460.00 | 40.7 AV | 54.0 | -13.3 | 1.31 V | 250 | 38.9 | 1.8 |
| 3 | #5470.00 | 52.2 PK | 68.2 | -16.0 | 1.31 V | 250 | 50.4 | 1.8 |
| 4 | *5720.00 | 112.5 PK | | | 1.31 V | 250 | 110.4 | 2.1 |
| 5 | *5720.00 | 102.5 AV | | | 1.31 V | 250 | 100.4 | 2.1 |
| 6 | #5850.00 | 52.9 PK | 68.2 | -15.3 | 1.31 V | 250 | 50.6 | 2.3 |
| 7 | 11440.00 | 51.4 PK | 74.0 | -22.6 | 1.32 V | 241 | 38.7 | 12.7 |
| 8 | 11440.00 | 40.5 AV | 54.0 | -13.5 | 1.32 V | 241 | 27.8 | 12.7 |
| 9 | #17160.00 | 46.3 PK | 68.2 | -21.9 | 1.22 V | 251 | 30.0 | 16.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

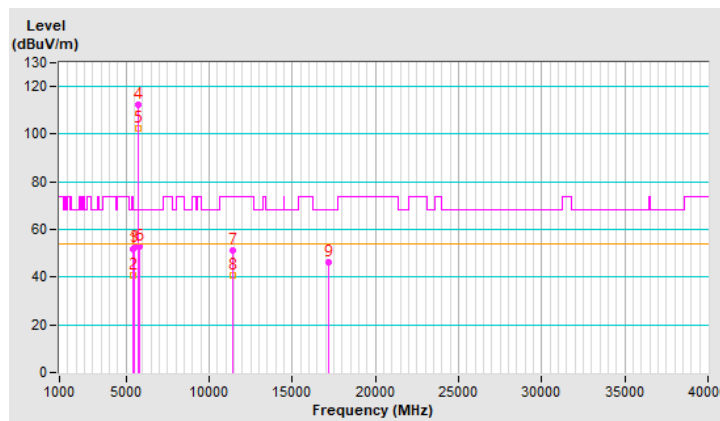


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 149 : 5745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5648.40 | 48.8 PK | 68.2 | -19.4 | 1.64 H | 119 | 46.8 | 2.0 |
| 2 | *5745.00 | 104.3 PK | | | 1.64 H | 119 | 102.2 | 2.1 |
| 3 | *5745.00 | 94.1 AV | | | 1.64 H | 119 | 92.0 | 2.1 |
| 4 | #5954.27 | 49.7 PK | 68.2 | -18.5 | 1.64 H | 119 | 47.1 | 2.6 |
| 5 | 11490.00 | 52.4 PK | 74.0 | -21.6 | 1.50 H | 266 | 39.6 | 12.8 |
| 6 | 11490.00 | 42.5 AV | 54.0 | -11.5 | 1.50 H | 266 | 29.7 | 12.8 |
| 7 | #17235.00 | 46.9 PK | 68.2 | -21.3 | 1.30 H | 273 | 30.4 | 16.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

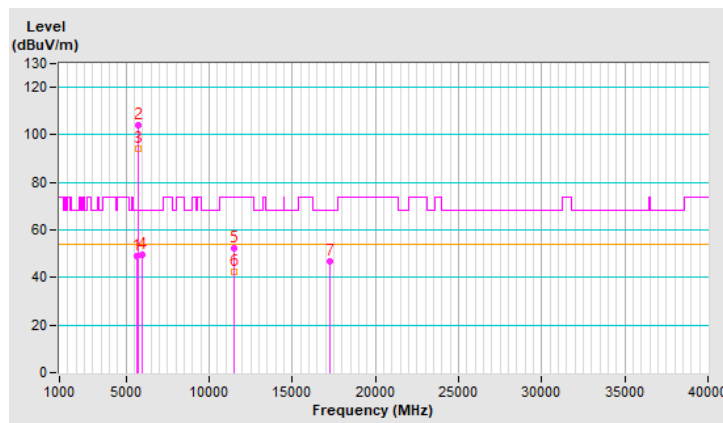


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 149 : 5745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5648.40 | 55.9 PK | 68.2 | -12.3 | 1.31 V | 250 | 53.9 | 2.0 |
| 2 | *5745.00 | 115.4 PK | | | 1.31 V | 250 | 113.3 | 2.1 |
| 3 | *5745.00 | 104.8 AV | | | 1.31 V | 250 | 102.7 | 2.1 |
| 4 | #5954.27 | 52.4 PK | 68.2 | -15.8 | 1.31 V | 250 | 49.8 | 2.6 |
| 5 | 11490.00 | 52.4 PK | 74.0 | -21.6 | 1.32 V | 241 | 39.6 | 12.8 |
| 6 | 11490.00 | 42.2 AV | 54.0 | -11.8 | 1.32 V | 241 | 29.4 | 12.8 |
| 7 | #17235.00 | 46.2 PK | 68.2 | -22.0 | 1.33 V | 231 | 29.7 | 16.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

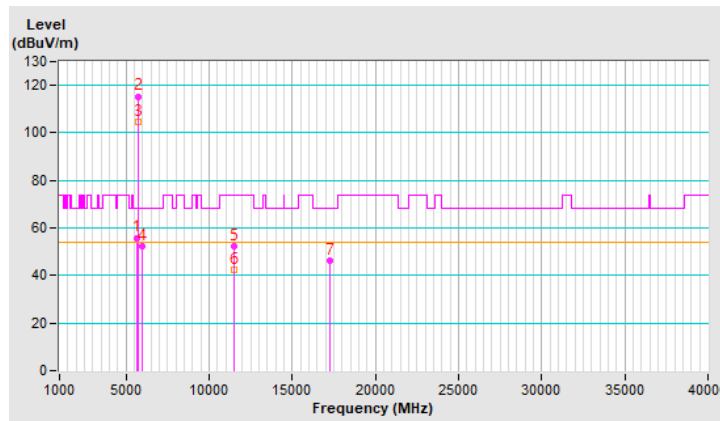


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 157 : 5785 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5629.93 | 49.1 PK | 68.2 | -19.1 | 1.65 H | 116 | 47.2 | 1.9 |
| 2 | *5785.00 | 102.3 PK | | | 1.65 H | 116 | 100.1 | 2.2 |
| 3 | *5785.00 | 92.0 AV | | | 1.65 H | 116 | 89.8 | 2.2 |
| 4 | #5947.33 | 49.5 PK | 68.2 | -18.7 | 1.65 H | 116 | 46.9 | 2.6 |
| 5 | 11570.00 | 53.4 PK | 74.0 | -20.6 | 1.54 H | 273 | 40.7 | 12.7 |
| 6 | 11570.00 | 43.2 AV | 54.0 | -10.8 | 1.54 H | 273 | 30.5 | 12.7 |
| 7 | #17355.00 | 46.7 PK | 68.2 | -21.5 | 1.32 H | 264 | 29.3 | 17.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

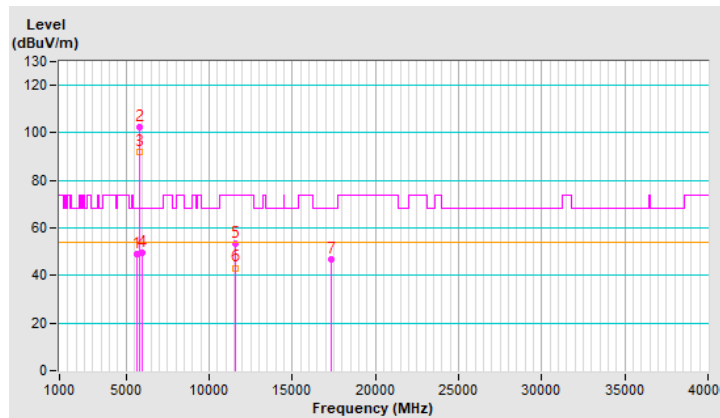


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 157 : 5785 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5629.93 | 52.6 PK | 68.2 | -15.6 | 1.31 V | 250 | 50.7 | 1.9 |
| 2 | *5785.00 | 113.6 PK | | | 1.31 V | 250 | 111.4 | 2.2 |
| 3 | *5785.00 | 103.2 AV | | | 1.31 V | 250 | 101.0 | 2.2 |
| 4 | #5947.33 | 52.3 PK | 68.2 | -15.9 | 1.31 V | 250 | 49.7 | 2.6 |
| 5 | 11570.00 | 52.4 PK | 74.0 | -21.6 | 1.33 V | 222 | 39.7 | 12.7 |
| 6 | 11570.00 | 42.5 AV | 54.0 | -11.5 | 1.33 V | 222 | 29.8 | 12.7 |
| 7 | #17355.00 | 46.4 PK | 68.2 | -21.8 | 1.25 V | 252 | 29.0 | 17.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

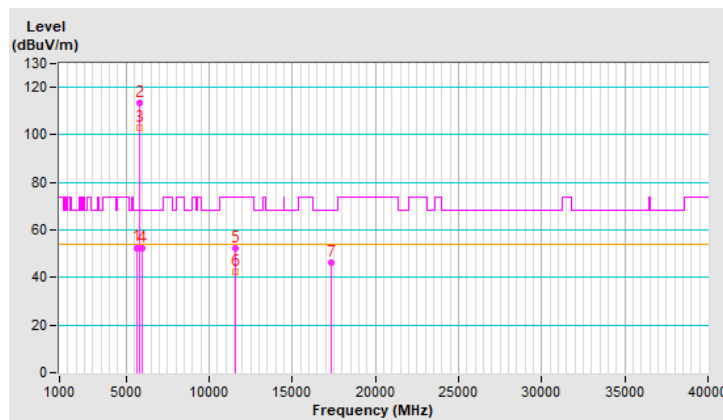


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 165 : 5825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5625.72 | 48.6 PK | 68.2 | -19.6 | 1.63 H | 123 | 46.7 | 1.9 |
| 2 | *5825.00 | 101.6 PK | | | 1.63 H | 123 | 99.3 | 2.3 |
| 3 | *5825.00 | 91.2 AV | | | 1.63 H | 123 | 88.9 | 2.3 |
| 4 | #5945.63 | 50.0 PK | 68.2 | -18.2 | 1.63 H | 123 | 47.4 | 2.6 |
| 5 | 11650.00 | 53.4 PK | 74.0 | -20.6 | 1.54 H | 286 | 40.9 | 12.5 |
| 6 | 11650.00 | 43.1 AV | 54.0 | -10.9 | 1.54 H | 286 | 30.6 | 12.5 |
| 7 | #17475.00 | 46.7 PK | 68.2 | -21.5 | 1.37 H | 271 | 28.0 | 18.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

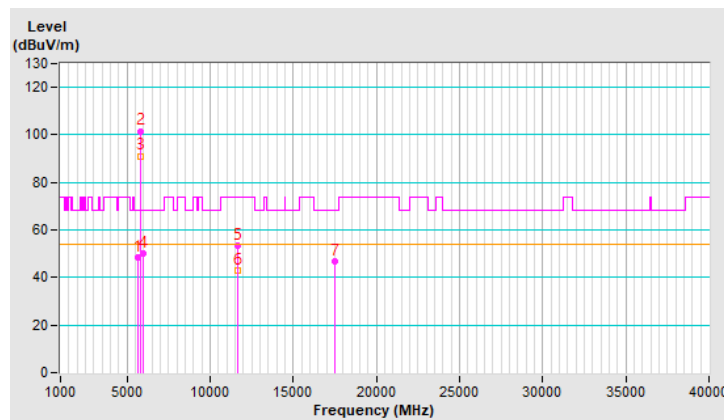


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE20) | Channel | CH 165 : 5825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5625.72 | 51.1 PK | 68.2 | -17.1 | 1.32 V | 254 | 49.2 | 1.9 |
| 2 | *5825.00 | 114.3 PK | | | 1.32 V | 254 | 112.0 | 2.3 |
| 3 | *5825.00 | 104.2 AV | | | 1.32 V | 254 | 101.9 | 2.3 |
| 4 | #5945.63 | 53.1 PK | 68.2 | -15.1 | 1.32 V | 254 | 50.5 | 2.6 |
| 5 | 11650.00 | 52.4 PK | 74.0 | -21.6 | 1.25 V | 0 | 39.9 | 12.5 |
| 6 | 11650.00 | 42.2 AV | 54.0 | -11.8 | 1.25 V | 0 | 29.7 | 12.5 |
| 7 | #17475.00 | 46.4 PK | 68.2 | -21.8 | 1.00 V | 0 | 27.7 | 18.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

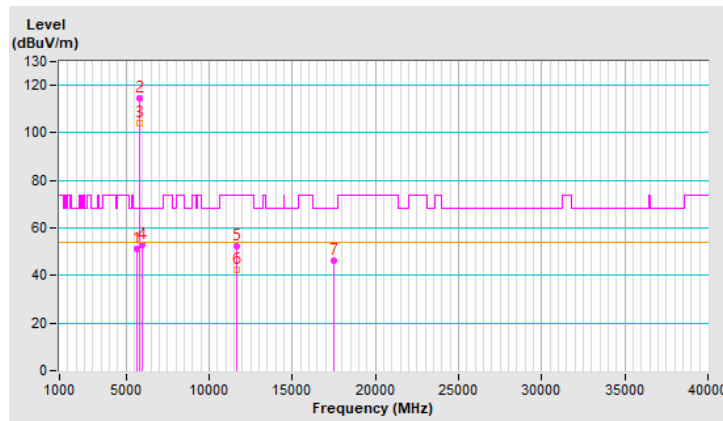


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE40) | Channel | CH 38 : 5190 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 51.5 PK | 74.0 | -22.5 | 1.51 H | 305 | 49.5 | 2.0 |
| 2 | 5150.00 | 40.4 AV | 54.0 | -13.6 | 1.51 H | 305 | 38.4 | 2.0 |
| 3 | *5190.00 | 97.4 PK | | | 1.51 H | 305 | 95.5 | 1.9 |
| 4 | *5190.00 | 87.9 AV | | | 1.51 H | 305 | 86.0 | 1.9 |
| 5 | #10380.00 | 53.2 PK | 68.2 | -15.0 | 1.60 H | 287 | 41.4 | 11.8 |
| 6 | 15570.00 | 46.4 PK | 74.0 | -27.6 | 1.34 H | 269 | 34.6 | 11.8 |
| 7 | 15570.00 | 35.5 AV | 54.0 | -18.5 | 1.34 H | 269 | 23.7 | 11.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

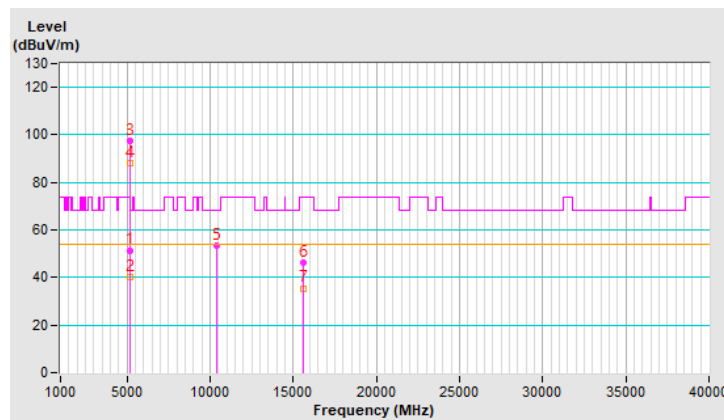


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE40) | Channel | CH 38 : 5190 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 65.6 PK | 74.0 | -8.4 | 1.31 V | 250 | 63.6 | 2.0 |
| 2 | 5150.00 | 52.2 AV | 54.0 | -1.8 | 1.31 V | 250 | 50.2 | 2.0 |
| 3 | *5190.00 | 107.7 PK | | | 1.31 V | 250 | 105.8 | 1.9 |
| 4 | *5190.00 | 96.2 AV | | | 1.31 V | 250 | 94.3 | 1.9 |
| 5 | #10380.00 | 52.5 PK | 68.2 | -15.7 | 1.56 V | 265 | 40.7 | 11.8 |
| 6 | 15570.00 | 47.0 PK | 74.0 | -27.0 | 1.28 V | 247 | 35.2 | 11.8 |
| 7 | 15570.00 | 36.1 AV | 54.0 | -17.9 | 1.28 V | 247 | 24.3 | 11.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

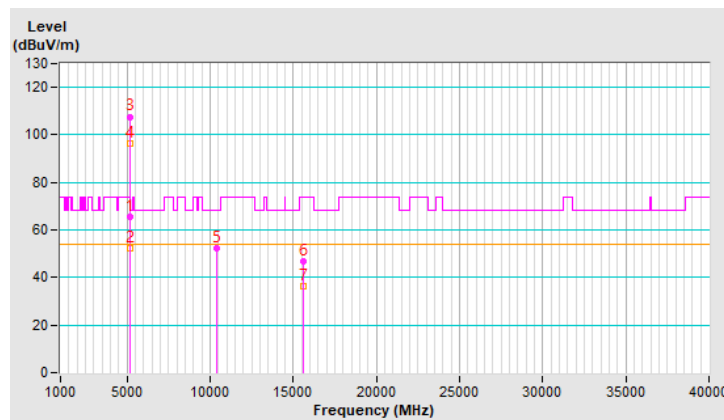


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE40) | Channel | CH 46 : 5230 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 5150.00 | 52.6 PK | 74.0 | -21.4 | 1.48 H | 306 | 50.6 | 2.0 |
| 2 | 5150.00 | 40.1 AV | 54.0 | -13.9 | 1.48 H | 306 | 38.1 | 2.0 |
| 3 | *5230.00 | 101.6 PK | | | 1.48 H | 306 | 99.9 | 1.7 |
| 4 | *5230.00 | 91.4 AV | | | 1.48 H | 306 | 89.7 | 1.7 |
| 5 | #10460.00 | 52.5 PK | 68.2 | -15.7 | 1.56 H | 272 | 40.7 | 11.8 |
| 6 | 15690.00 | 46.2 PK | 74.0 | -27.8 | 1.30 H | 268 | 34.5 | 11.7 |
| 7 | 15690.00 | 35.5 AV | 54.0 | -18.5 | 1.30 H | 268 | 23.8 | 11.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

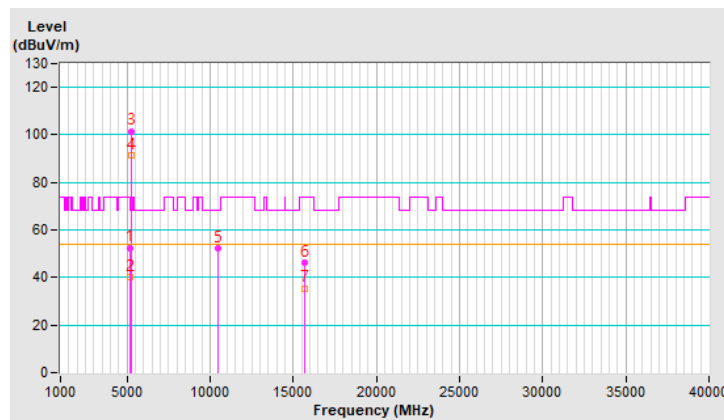


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE40) | Channel | CH 46 : 5230 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 61.2 PK | 74.0 | -12.8 | 1.31 V | 250 | 59.2 | 2.0 |
| 2 | 5150.00 | 50.4 AV | 54.0 | -3.6 | 1.31 V | 250 | 48.4 | 2.0 |
| 3 | *5230.00 | 110.1 PK | | | 1.31 V | 250 | 108.4 | 1.7 |
| 4 | *5230.00 | 100.2 AV | | | 1.31 V | 250 | 98.5 | 1.7 |
| 5 | #10460.00 | 51.2 PK | 68.2 | -17.0 | 1.32 V | 221 | 39.4 | 11.8 |
| 6 | 15690.00 | 44.2 PK | 74.0 | -29.8 | 1.32 V | 241 | 32.5 | 11.7 |
| 7 | 15690.00 | 34.5 AV | 54.0 | -19.5 | 1.32 V | 241 | 22.8 | 11.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

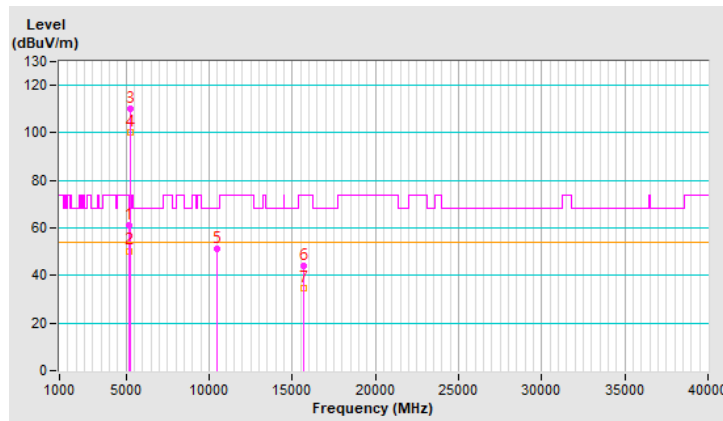


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE40) | Channel | CH 54 : 5270 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *5270.00 | 101.2 PK | | | 1.46 H | 300 | 99.7 | 1.5 |
| 2 | *5270.00 | 91.3 AV | | | 1.46 H | 300 | 89.8 | 1.5 |
| 3 | 5350.00 | 52.6 PK | 74.0 | -21.4 | 1.46 H | 300 | 50.9 | 1.7 |
| 4 | 5350.00 | 39.8 AV | 54.0 | -14.2 | 1.46 H | 300 | 38.1 | 1.7 |
| 5 | #10540.00 | 53.2 PK | 68.2 | -15.0 | 1.52 H | 275 | 41.4 | 11.8 |
| 6 | 15810.00 | 47.2 PK | 74.0 | -26.8 | 1.38 H | 276 | 36.0 | 11.2 |
| 7 | 15810.00 | 36.2 AV | 54.0 | -17.8 | 1.38 H | 276 | 25.0 | 11.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

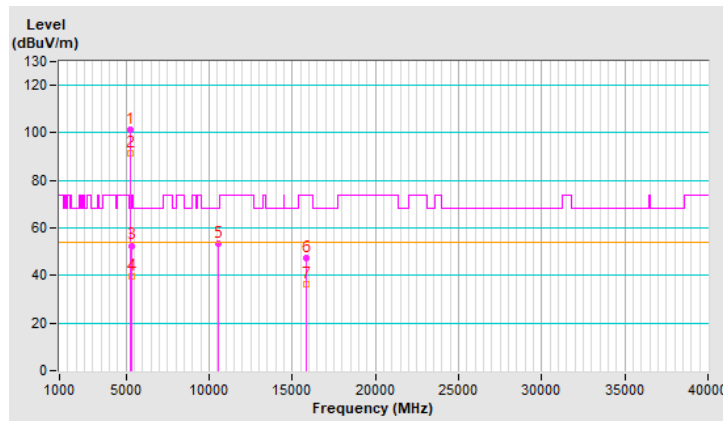


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE40) | Channel | CH 54 : 5270 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5270.00 | 110.2 PK | | | 1.31 V | 250 | 108.7 | 1.5 |
| 2 | *5270.00 | 100.1 AV | | | 1.31 V | 250 | 98.6 | 1.5 |
| 3 | 5350.00 | 66.1 PK | 74.0 | -7.9 | 1.31 V | 250 | 64.4 | 1.7 |
| 4 | 5350.00 | 52.2 AV | 54.0 | -1.8 | 1.31 V | 250 | 50.5 | 1.7 |
| 5 | #10540.00 | 51.3 PK | 68.2 | -16.9 | 1.25 V | 241 | 39.5 | 11.8 |
| 6 | 15810.00 | 44.3 PK | 74.0 | -29.7 | 1.13 V | 236 | 33.1 | 11.2 |
| 7 | 15810.00 | 34.5 AV | 54.0 | -19.5 | 1.13 V | 236 | 23.3 | 11.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

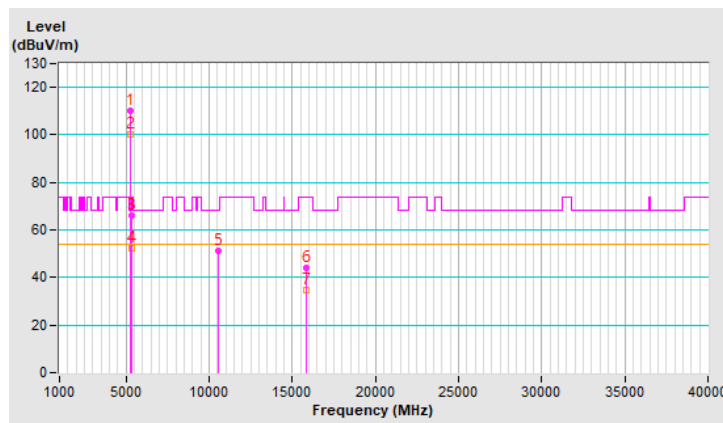


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE40) | Channel | CH 62 : 5310 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5310.00 | 97.4 PK | | | 1.52 H | 294 | 95.8 | 1.6 |
| 2 | *5310.00 | 88.1 AV | | | 1.52 H | 294 | 86.5 | 1.6 |
| 3 | 5350.00 | 51.0 PK | 74.0 | -23.0 | 1.52 H | 294 | 49.3 | 1.7 |
| 4 | 5350.00 | 40.0 AV | 54.0 | -14.0 | 1.52 H | 294 | 38.3 | 1.7 |
| 5 | 10620.00 | 53.1 PK | 74.0 | -20.9 | 1.51 H | 272 | 41.4 | 11.7 |
| 6 | 10620.00 | 43.0 AV | 54.0 | -11.0 | 1.51 H | 272 | 31.3 | 11.7 |
| 7 | 15930.00 | 46.2 PK | 74.0 | -27.8 | 1.30 H | 269 | 35.1 | 11.1 |
| 8 | 15930.00 | 35.4 AV | 54.0 | -18.6 | 1.30 H | 269 | 24.3 | 11.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

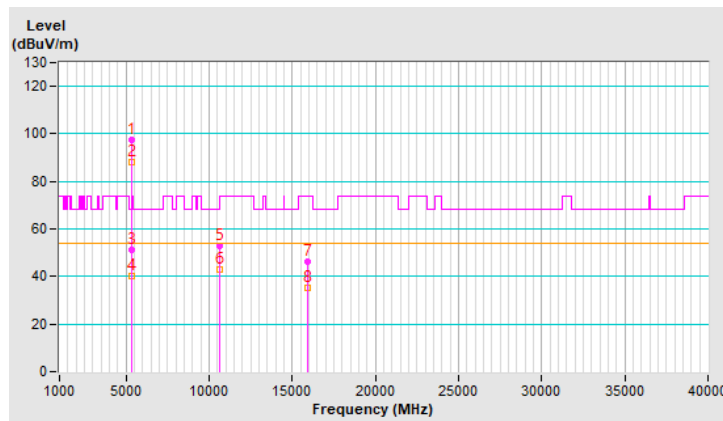


| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE40) | Channel | CH 62 : 5310 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5310.00 | 106.9 PK | | | 1.31 V | 250 | 105.3 | 1.6 |
| 2 | *5310.00 | 97.2 AV | | | 1.31 V | 250 | 95.6 | 1.6 |
| 3 | 5350.00 | 62.0 PK | 74.0 | -12.0 | 1.31 V | 250 | 60.3 | 1.7 |
| 4 | 5350.00 | 52.3 AV | 54.0 | -1.7 | 1.31 V | 250 | 50.6 | 1.7 |
| 5 | 10620.00 | 50.4 PK | 74.0 | -23.6 | 1.25 V | 222 | 38.7 | 11.7 |
| 6 | 10620.00 | 40.2 AV | 54.0 | -13.8 | 1.25 V | 222 | 28.5 | 11.7 |
| 7 | 15930.00 | 44.2 PK | 74.0 | -29.8 | 1.30 V | 236 | 33.1 | 11.1 |
| 8 | 15930.00 | 35.4 AV | 54.0 | -18.6 | 1.30 V | 236 | 24.3 | 11.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

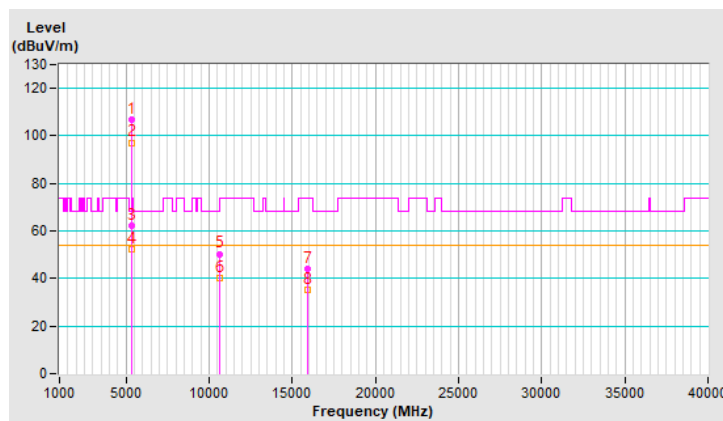

| | | | |
|-----------------------------|-----------------|--|--|
| RF Mode | 802.11ax (HE40) | Channel | CH 102 : 5510 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 75% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 51.4 PK | 74.0 | -22.6 | 1.47 H | 291 | 49.6 | 1.8 |
| 2 | 5460.00 | 40.2 AV | 54.0 | -13.8 | 1.47 H | 291 | 38.4 | 1.8 |
| 3 | #5470.00 | 61.6 PK | 68.2 | -6.6 | 1.47 H | 291 | 59.8 | 1.8 |
| 4 | *5510.00 | 97.7 PK | | | 1.47 H | 291 | 96.0 | 1.7 |
| 5 | *5510.00 | 88.6 AV | | | 1.47 H | 291 | 86.9 | 1.7 |
| 6 | 11020.00 | 52.4 PK | 74.0 | -21.6 | 1.56 H | 280 | 40.0 | 12.4 |
| 7 | 11020.00 | 42.3 AV | 54.0 | -11.7 | 1.56 H | 280 | 29.9 | 12.4 |
| 8 | #16530.00 | 47.2 PK | 68.2 | -21.0 | 1.32 H | 249 | 33.3 | 13.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

