


RF Mode	802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.8 PK	74.0	-15.2	1.31 V	250	57.0	1.8
2	5460.00	46.5 AV	54.0	-7.5	1.31 V	250	44.7	1.8
3	#5470.00	66.7 PK	68.2	-1.5	1.31 V	250	64.9	1.8
4	*5510.00	106.8 PK			1.31 V	250	105.1	1.7
5	*5510.00	96.7 AV			1.31 V	250	95.0	1.7
6	11020.00	50.3 PK	74.0	-23.7	1.25 V	241	37.9	12.4
7	11020.00	40.2 AV	54.0	-13.8	1.25 V	241	27.8	12.4
8	#16530.00	42.4 PK	68.2	-25.8	1.36 V	263	28.5	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

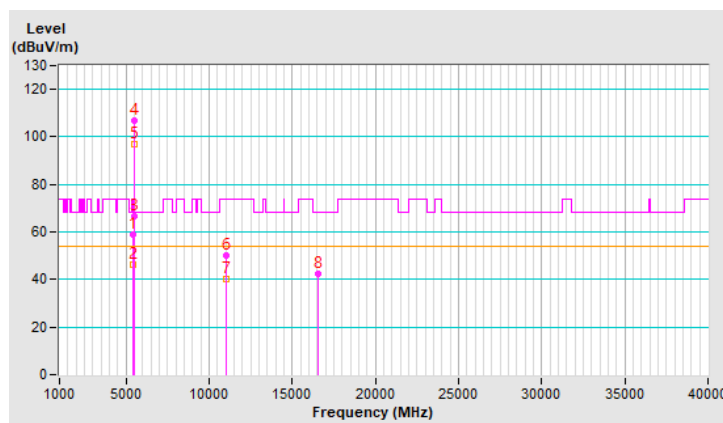


RF Mode	802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	101.1 PK			1.49 H	294	99.3	1.8
2	*5550.00	90.9 AV			1.49 H	294	89.1	1.8
3	11100.00	52.3 PK	74.0	-21.7	1.57 H	261	40.1	12.2
4	11100.00	42.3 AV	54.0	-11.7	1.57 H	261	30.1	12.2
5	#16650.00	46.4 PK	68.2	-21.8	1.35 H	275	31.6	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

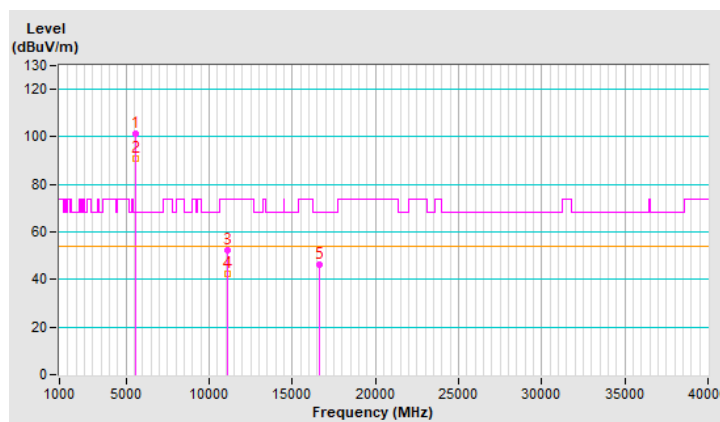


RF Mode	802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	111.2 PK			1.31 V	250	109.4	1.8
2	*5550.00	100.9 AV			1.31 V	250	99.1	1.8
3	11100.00	51.4 PK	74.0	-22.6	1.52 V	241	39.2	12.2
4	11100.00	40.2 AV	54.0	-13.8	1.52 V	241	28.0	12.2
5	#16650.00	43.2 PK	68.2	-25.0	1.36 V	228	28.4	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

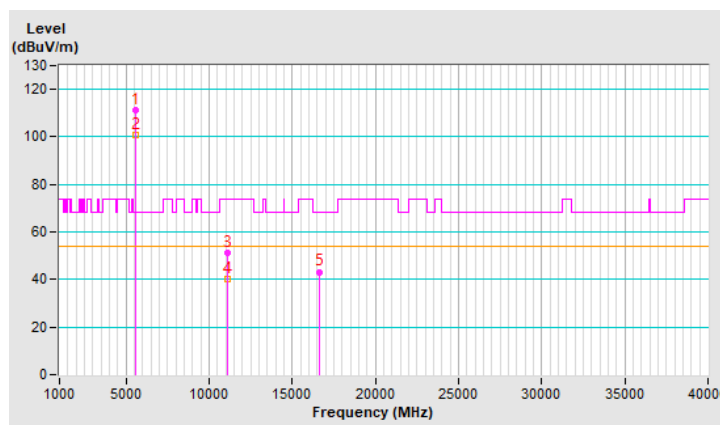


RF Mode	802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	101.4 PK			1.42 H	292	99.5	1.9
2	*5670.00	91.3 AV			1.42 H	292	89.4	1.9
3	#5725.00	63.2 PK	68.2	-5.0	1.42 H	292	61.1	2.1
4	11340.00	52.6 PK	74.0	-21.4	1.55 H	284	40.1	12.5
5	11340.00	42.8 AV	54.0	-11.2	1.55 H	284	30.3	12.5
6	#17010.00	46.7 PK	68.2	-21.5	1.34 H	251	30.4	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

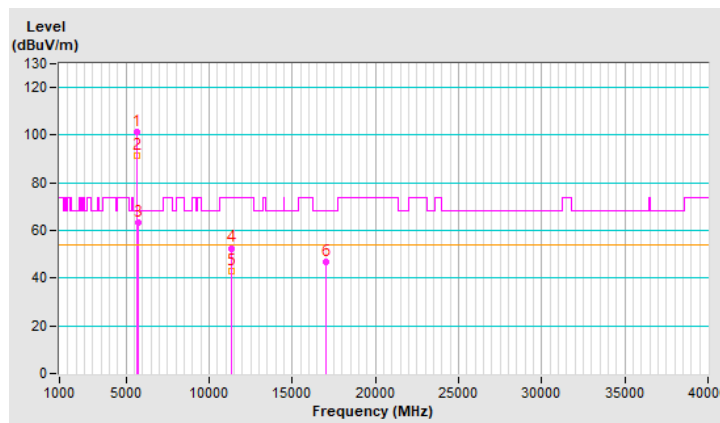


RF Mode	802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	109.8 PK			1.31 V	250	107.9	1.9
2	*5670.00	98.3 AV			1.31 V	250	96.4	1.9
3	#5725.00	66.4 PK	68.2	-1.8	1.31 V	250	64.3	2.1
4	11340.00	51.4 PK	74.0	-22.6	1.25 V	241	38.9	12.5
5	11340.00	40.4 AV	54.0	-13.6	1.25 V	241	27.9	12.5
6	#17010.00	42.4 PK	68.2	-25.8	1.36 V	241	26.1	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

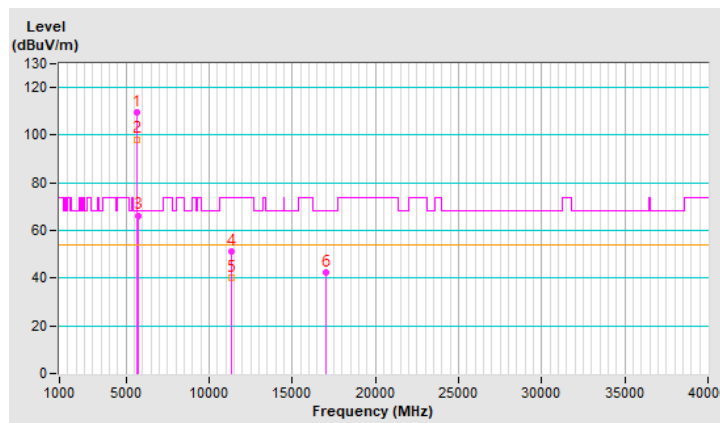


RF Mode	802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.6 PK	74.0	-23.4	1.43 H	276	48.8	1.8
2	5460.00	40.2 AV	54.0	-13.8	1.43 H	276	38.4	1.8
3	#5470.00	49.5 PK	68.2	-18.7	1.43 H	276	47.7	1.8
4	*5710.00	100.9 PK			1.43 H	276	98.9	2.0
5	*5710.00	91.1 AV			1.43 H	276	89.1	2.0
6	#5850.00	49.8 PK	68.2	-18.4	1.43 H	276	47.5	2.3
7	11420.00	53.1 PK	74.0	-20.9	1.52 H	281	40.4	12.7
8	11420.00	43.2 AV	54.0	-10.8	1.52 H	281	30.5	12.7
9	#17130.00	46.9 PK	68.2	-21.3	1.29 H	251	30.6	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

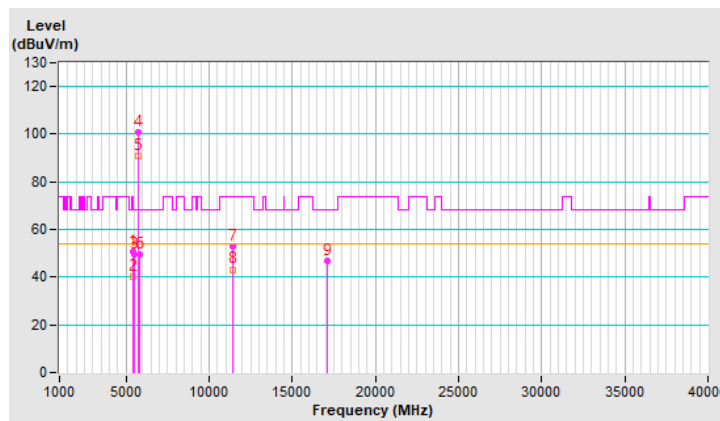


RF Mode	802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.7 PK	74.0	-22.3	1.31 V	250	49.9	1.8
2	5460.00	40.4 AV	54.0	-13.6	1.31 V	250	38.6	1.8
3	#5470.00	51.4 PK	68.2	-16.8	1.31 V	250	49.6	1.8
4	*5710.00	109.3 PK			1.31 V	250	107.3	2.0
5	*5710.00	99.6 AV			1.31 V	250	97.6	2.0
6	#5850.00	51.2 PK	68.2	-17.0	1.31 V	250	48.9	2.3
7	11420.00	51.4 PK	74.0	-22.6	1.25 V	222	38.7	12.7
8	11420.00	40.2 AV	54.0	-13.8	1.25 V	222	27.5	12.7
9	#17130.00	43.2 PK	68.2	-25.0	1.22 V	241	26.9	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

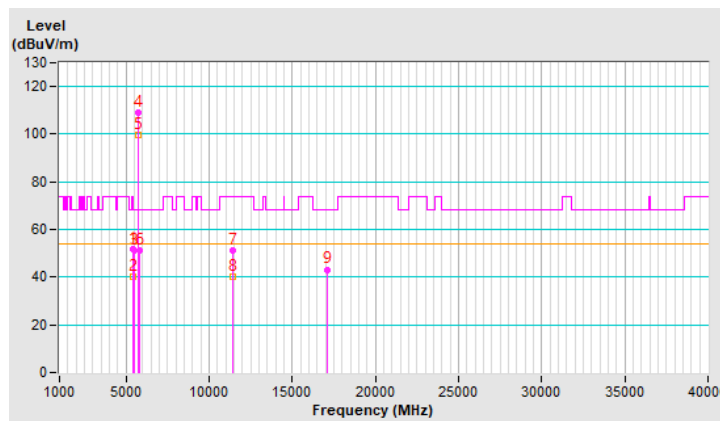


RF Mode	802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.30	50.2 PK	68.2	-18.0	1.46 H	263	48.3	1.9
2	*5755.00	101.0 PK			1.46 H	263	98.9	2.1
3	*5755.00	91.4 AV			1.46 H	263	89.3	2.1
4	#5937.33	51.6 PK	68.2	-16.6	1.46 H	263	49.1	2.5
5	11510.00	53.2 PK	74.0	-20.8	1.55 H	280	40.4	12.8
6	11510.00	43.0 AV	54.0	-11.0	1.55 H	280	30.2	12.8
7	#17265.00	46.8 PK	68.2	-21.4	1.32 H	247	30.2	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

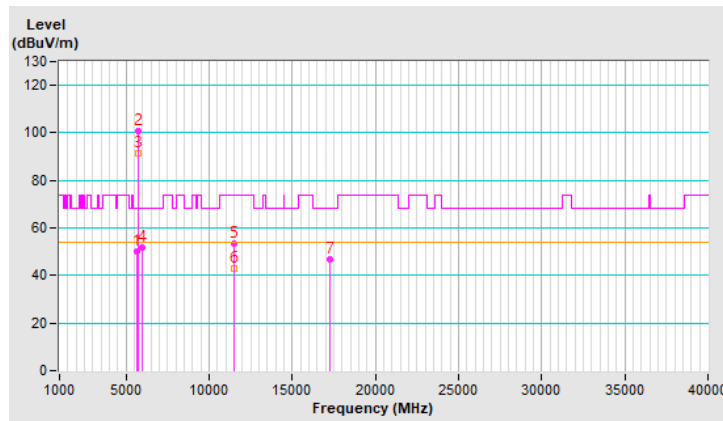


RF Mode	802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.30	61.9 PK	68.2	-6.3	1.31 V	250	60.0	1.9
2	*5755.00	111.8 PK			1.31 V	250	109.7	2.1
3	*5755.00	101.4 AV			1.31 V	250	99.3	2.1
4	#5937.33	52.8 PK	68.2	-15.4	1.31 V	250	50.3	2.5
5	11510.00	52.4 PK	74.0	-21.6	1.25 V	214	39.6	12.8
6	11510.00	42.2 AV	54.0	-11.8	1.25 V	214	29.4	12.8
7	#17265.00	44.4 PK	68.2	-23.8	1.22 V	252	27.8	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

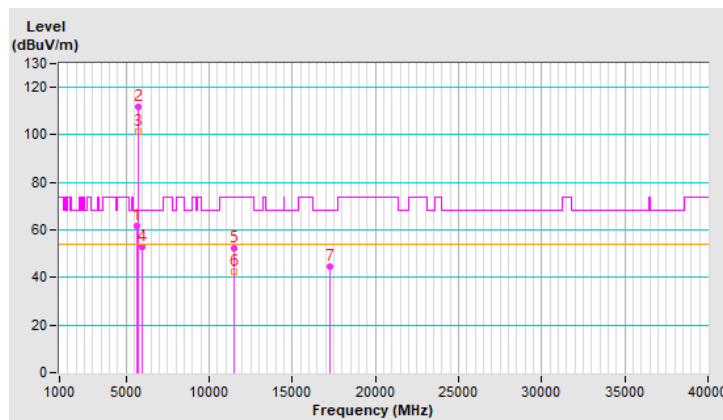


RF Mode	802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5630.37	50.8 PK	68.2	-17.4	1.48 H	285	48.9	1.9
2	*5795.00	101.1 PK			1.48 H	285	98.8	2.3
3	*5795.00	91.3 AV			1.48 H	285	89.0	2.3
4	#5934.52	60.0 PK	68.2	-8.2	1.48 H	285	57.5	2.5
5	11590.00	52.4 PK	74.0	-21.6	1.52 H	269	39.7	12.7
6	11590.00	42.5 AV	54.0	-11.5	1.52 H	269	29.8	12.7
7	#17385.00	46.7 PK	68.2	-21.5	1.35 H	250	29.1	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

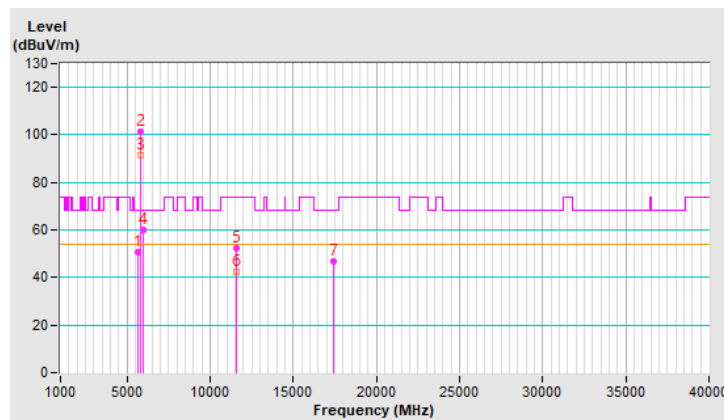


RF Mode	802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5630.37	54.6 PK	68.2	-13.6	1.31 V	250	52.7	1.9
2	*5795.00	111.5 PK			1.31 V	250	109.2	2.3
3	*5795.00	101.2 AV			1.31 V	250	98.9	2.3
4	#5934.52	60.8 PK	68.2	-7.4	1.31 V	250	58.3	2.5
5	11590.00	52.3 PK	74.0	-21.7	1.28 V	222	39.6	12.7
6	11590.00	42.4 AV	54.0	-11.6	1.28 V	222	29.7	12.7
7	#17385.00	43.4 PK	68.2	-24.8	1.28 V	241	25.8	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

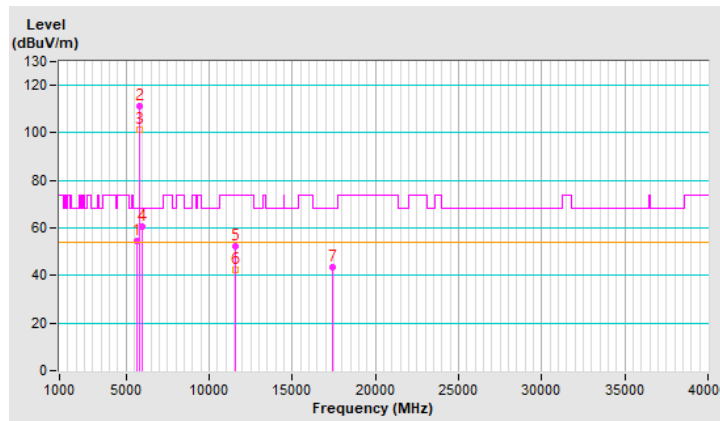


RF Mode	802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.4 PK	74.0	-12.6	1.56 H	296	59.4	2.0
2	5150.00	48.6 AV	54.0	-5.4	1.56 H	296	46.6	2.0
3	*5210.00	99.4 PK			1.56 H	296	97.6	1.8
4	*5210.00	88.2 AV			1.56 H	296	86.4	1.8
5	5350.00	51.6 PK	74.0	-22.4	1.56 H	296	49.9	1.7
6	5350.00	40.1 AV	54.0	-13.9	1.56 H	296	38.4	1.7
7	#10420.00	52.8 PK	68.2	-15.4	1.52 H	269	40.9	11.9
8	15630.00	46.8 PK	74.0	-27.2	1.30 H	272	35.1	11.7
9	15630.00	35.8 AV	54.0	-18.2	1.30 H	272	24.1	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

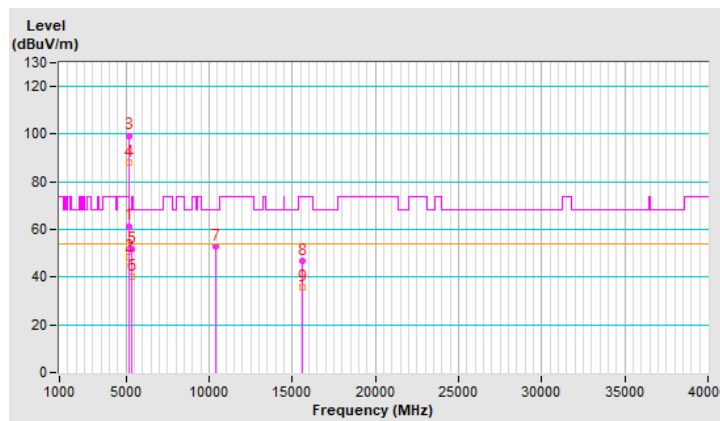


RF Mode	802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.3 PK	74.0	-9.7	1.31 V	250	62.3	2.0
2	5150.00	52.4 AV	54.0	-1.6	1.31 V	250	50.4	2.0
3	*5210.00	104.5 PK			1.31 V	250	102.7	1.8
4	*5210.00	94.7 AV			1.31 V	250	92.9	1.8
5	5350.00	52.7 PK	74.0	-21.3	1.31 V	250	51.0	1.7
6	5350.00	40.3 AV	54.0	-13.7	1.31 V	250	38.6	1.7
7	#10420.00	48.3 PK	68.2	-19.9	1.12 V	252	36.4	11.9
8	15630.00	40.4 PK	74.0	-33.6	1.31 V	241	28.7	11.7
9	15630.00	30.5 AV	54.0	-23.5	1.31 V	241	18.8	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

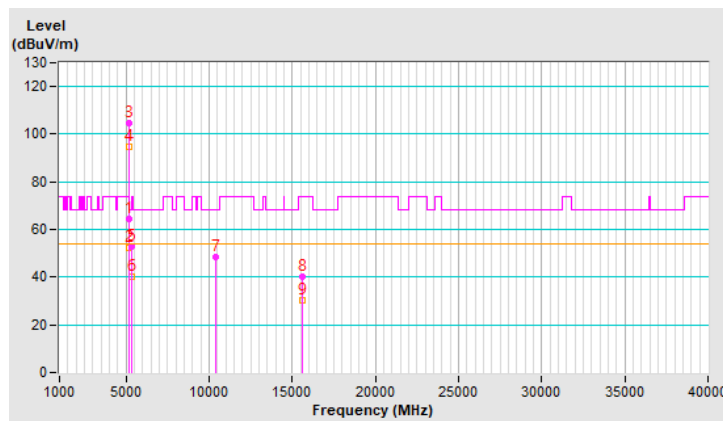


RF Mode	802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.1 PK	74.0	-23.9	1.67 H	304	48.1	2.0
2	5150.00	40.4 AV	54.0	-13.6	1.67 H	304	38.4	2.0
3	*5290.00	97.6 PK			1.67 H	304	96.1	1.5
4	*5290.00	84.7 AV			1.67 H	304	83.2	1.5
5	5350.00	60.1 PK	74.0	-13.9	1.67 H	304	58.4	1.7
6	5350.00	46.5 AV	54.0	-7.5	1.67 H	304	44.8	1.7
7	#10580.00	52.9 PK	68.2	-15.3	1.58 H	288	41.2	11.7
8	15870.00	46.6 PK	74.0	-27.4	1.32 H	246	35.6	11.0
9	15870.00	35.8 AV	54.0	-18.2	1.32 H	246	24.8	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

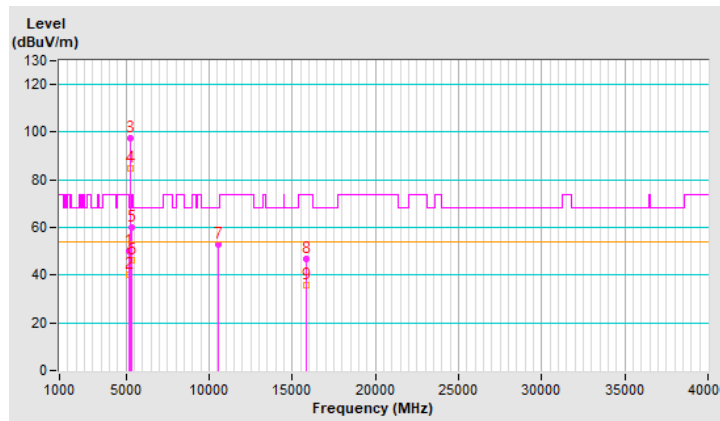


RF Mode	802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.6 PK	74.0	-21.4	1.31 V	250	50.6	2.0
2	5150.00	40.5 AV	54.0	-13.5	1.31 V	250	38.5	2.0
3	*5290.00	103.6 PK			1.31 V	250	102.1	1.5
4	*5290.00	93.0 AV			1.31 V	250	91.5	1.5
5	5350.00	63.6 PK	74.0	-10.4	1.31 V	250	61.9	1.7
6	5350.00	52.1 AV	54.0	-1.9	1.31 V	250	50.4	1.7
7	#10580.00	49.3 PK	68.2	-18.9	1.25 V	241	37.6	11.7
8	15870.00	40.2 PK	74.0	-33.8	1.25 V	241	29.2	11.0
9	15870.00	30.4 AV	54.0	-23.6	1.25 V	241	19.4	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

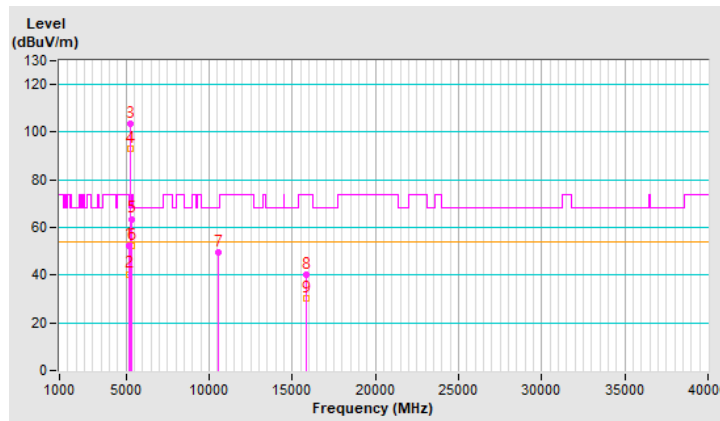


RF Mode	802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.4 PK	74.0	-13.6	1.52 H	289	58.6	1.8
2	5460.00	47.6 AV	54.0	-6.4	1.52 H	289	45.8	1.8
3	#5470.00	62.6 PK	68.2	-5.6	1.52 H	289	60.8	1.8
4	*5530.00	103.4 PK			1.52 H	289	101.7	1.7
5	*5530.00	92.2 AV			1.52 H	289	90.5	1.7
6	#5725.00	48.7 PK	68.2	-19.5	1.52 H	289	46.6	2.1
7	11060.00	52.4 PK	74.0	-21.6	1.58 H	275	40.1	12.3
8	11060.00	42.5 AV	54.0	-11.5	1.58 H	275	30.2	12.3
9	#16590.00	46.3 PK	68.2	-21.9	1.39 H	261	31.8	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

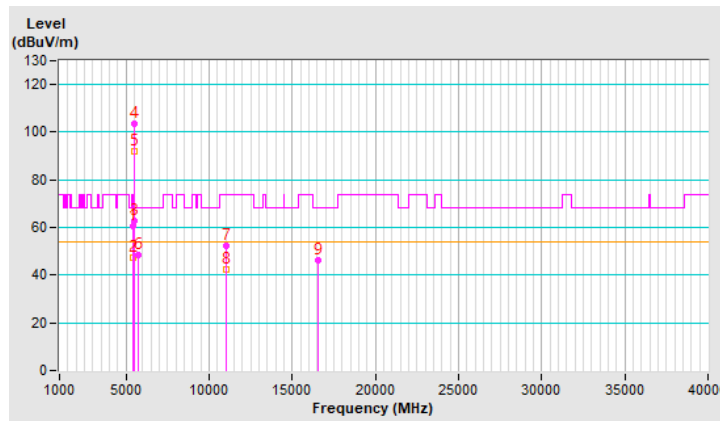


RF Mode	802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.8 PK	74.0	-8.2	1.31 V	250	64.0	1.8
2	5460.00	52.4 AV	54.0	-1.6	1.31 V	250	50.6	1.8
3	#5470.00	66.5 PK	68.2	-1.7	1.31 V	250	64.7	1.8
4	*5530.00	103.0 PK			1.31 V	250	101.3	1.7
5	*5530.00	91.8 AV			1.31 V	250	90.1	1.7
6	#5725.00	51.5 PK	68.2	-16.7	1.31 V	250	49.4	2.1
7	11060.00	48.4 PK	74.0	-25.6	1.35 V	241	36.1	12.3
8	11060.00	38.2 AV	54.0	-15.8	1.35 V	241	25.9	12.3
9	#16590.00	40.5 PK	68.2	-27.7	1.33 V	222	26.0	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

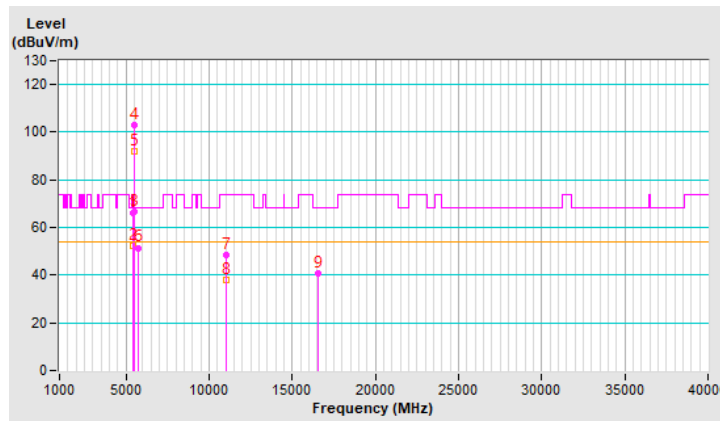


RF Mode	802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	99.6 PK			1.45 H	279	97.7	1.9
2	*5610.00	86.5 AV			1.45 H	279	84.6	1.9
3	#5725.00	60.2 PK	68.2	-8.0	1.45 H	279	58.1	2.1
4	11220.00	52.8 PK	74.0	-21.2	1.48 H	283	40.7	12.1
5	11220.00	42.9 AV	54.0	-11.1	1.48 H	283	30.8	12.1
6	#16830.00	46.3 PK	68.2	-21.9	1.32 H	254	30.8	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

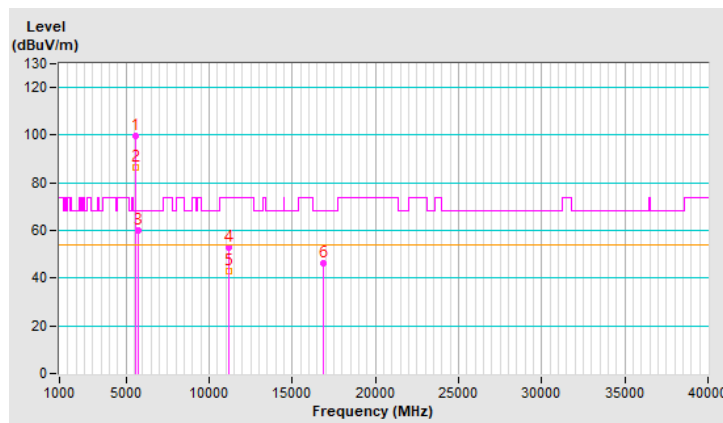


RF Mode	802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	104.8 PK			1.31 V	250	102.9	1.9
2	*5610.00	93.7 AV			1.31 V	250	91.8	1.9
3	#5725.00	66.4 PK	68.2	-1.8	1.31 V	250	64.3	2.1
4	11220.00	50.4 PK	74.0	-23.6	1.33 V	214	38.3	12.1
5	11220.00	40.5 AV	54.0	-13.5	1.33 V	214	28.4	12.1
6	#16830.00	41.4 PK	68.2	-26.8	1.25 V	222	25.9	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

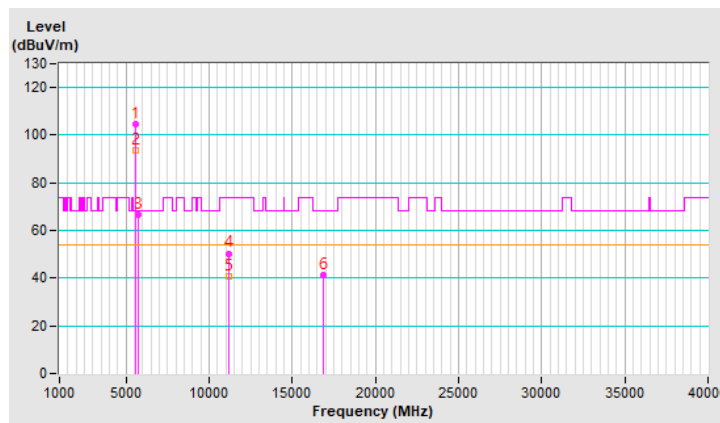


RF Mode	802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	48.6 PK	74.0	-25.4	1.42 H	290	46.8	1.8
2	5460.00	39.4 AV	54.0	-14.6	1.42 H	290	37.6	1.8
3	#5470.00	50.4 PK	68.2	-17.8	1.42 H	290	48.6	1.8
4	*5690.00	108.1 PK			1.42 H	290	106.1	2.0
5	*5690.00	96.6 AV			1.42 H	290	94.6	2.0
6	#5850.00	58.6 PK	68.2	-9.6	1.42 H	290	56.3	2.3
7	11380.00	53.0 PK	74.0	-21.0	1.55 H	260	40.3	12.7
8	11380.00	43.1 AV	54.0	-10.9	1.55 H	260	30.4	12.7
9	#17070.00	45.9 PK	68.2	-22.3	1.30 H	275	29.6	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

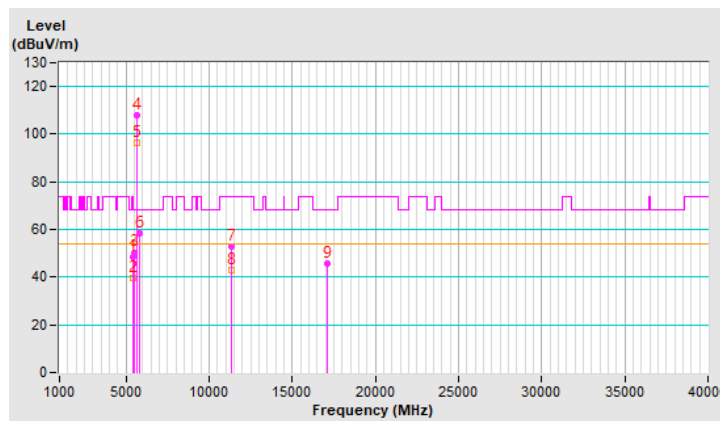


RF Mode	802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.9 PK	74.0	-20.1	1.31 V	250	52.1	1.8
2	5460.00	40.7 AV	54.0	-13.3	1.31 V	250	38.9	1.8
3	#5470.00	56.0 PK	68.2	-12.2	1.31 V	250	54.2	1.8
4	*5690.00	108.0 PK			1.31 V	250	106.0	2.0
5	*5690.00	96.3 AV			1.31 V	250	94.3	2.0
6	#5850.00	67.3 PK	68.2	-0.9	1.31 V	250	65.0	2.3
7	11380.00	51.3 PK	74.0	-22.7	2.11 V	252	38.6	12.7
8	11380.00	41.2 AV	54.0	-12.8	2.11 V	252	28.5	12.7
9	#17070.00	42.3 PK	68.2	-25.9	1.32 V	241	26.0	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

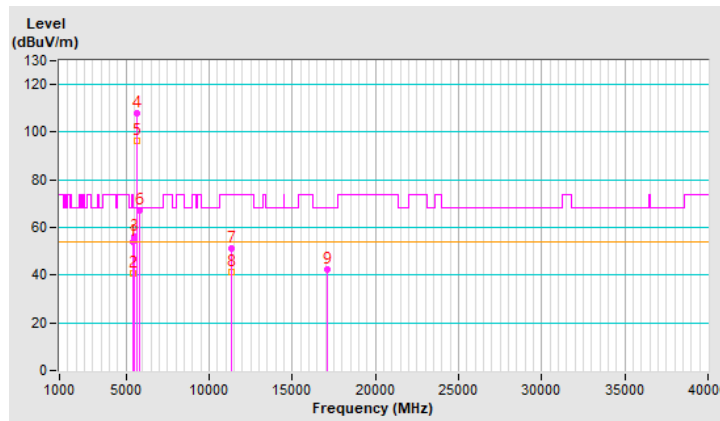


RF Mode	802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.36	58.4 PK	68.2	-9.8	1.49 H	300	56.4	2.0
2	*5775.00	99.5 PK			1.49 H	300	97.3	2.2
3	*5775.00	88.4 AV			1.49 H	300	86.2	2.2
4	#5928.69	55.6 PK	68.2	-12.6	1.49 H	300	53.1	2.5
5	11550.00	52.3 PK	74.0	-21.7	1.59 H	270	39.6	12.7
6	11550.00	42.4 AV	54.0	-11.6	1.59 H	270	29.7	12.7
7	#17325.00	47.2 PK	68.2	-21.0	1.39 H	249	30.2	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

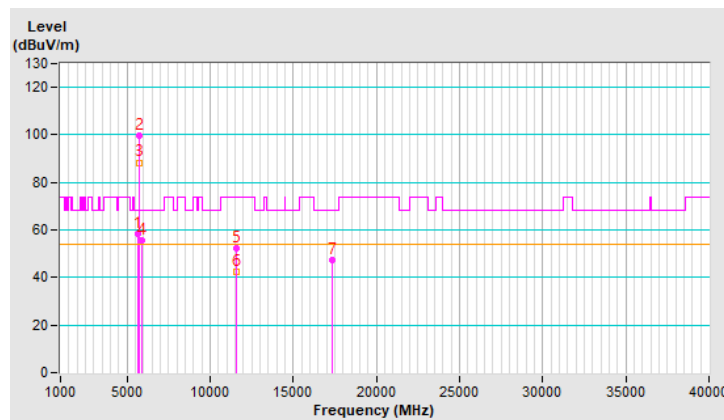


RF Mode	802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.36	66.3 PK	68.2	-1.9	1.31 V	252	64.3	2.0
2	*5775.00	106.3 PK			1.31 V	252	104.1	2.2
3	*5775.00	96.5 AV			1.31 V	252	94.3	2.2
4	#5928.69	65.5 PK	68.2	-2.7	1.31 V	252	63.0	2.5
5	11550.00	50.1 PK	74.0	-23.9	1.21 V	214	37.4	12.7
6	11550.00	40.2 AV	54.0	-13.8	1.21 V	214	27.5	12.7
7	#17325.00	41.3 PK	68.2	-26.9	1.32 V	222	24.3	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

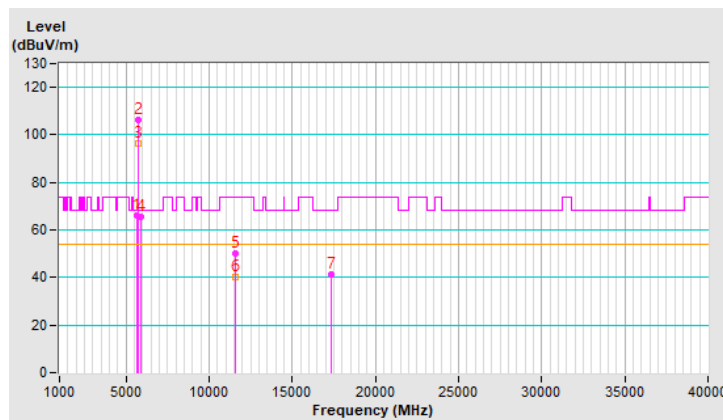


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.0 PK	74.0	-20.0	1.48 H	347	52.9	1.1
2	5150.00	37.9 AV	54.0	-16.1	1.48 H	347	36.8	1.1
3	*5180.00	108.1 PK			1.48 H	347	107.1	1.0
4	*5180.00	99.2 AV			1.48 H	347	98.2	1.0
5	#10360.00	65.1 PK	68.2	-3.1	2.25 H	20	53.9	11.2
6	15540.00	48.8 PK	74.0	-25.2	3.78 H	256	37.9	10.9
7	15540.00	35.7 AV	54.0	-18.3	3.78 H	256	24.8	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

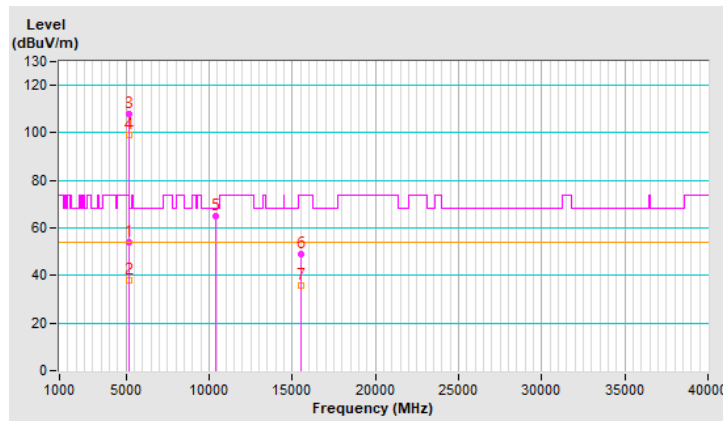


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.2 PK	74.0	-20.8	1.49 V	288	52.1	1.1
2	5150.00	42.2 AV	54.0	-11.8	1.49 V	288	41.1	1.1
3	*5180.00	116.1 PK			1.49 V	288	115.1	1.0
4	*5180.00	106.9 AV			1.49 V	288	105.9	1.0
5	#10360.00	65.2 PK	68.2	-3.0	2.98 V	8	54.0	11.2
6	15540.00	48.9 PK	74.0	-25.1	3.82 V	275	38.0	10.9
7	15540.00	36.1 AV	54.0	-17.9	3.82 V	275	25.2	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

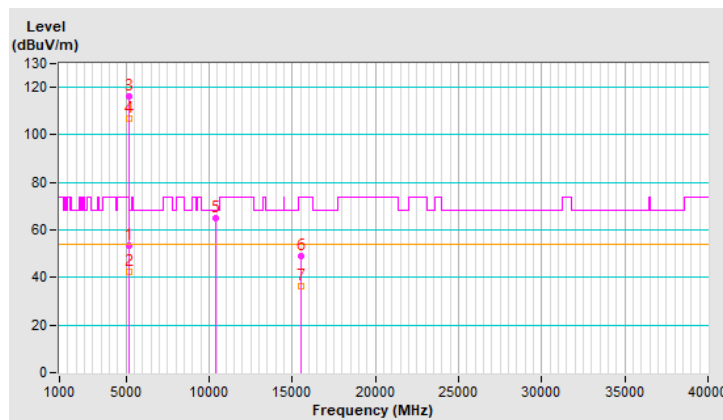


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.60	57.4 PK	74.0	-16.6	1.50 H	342	56.3	1.1
2	5120.60	40.5 AV	54.0	-13.5	1.50 H	342	39.4	1.1
3	*5200.00	110.7 PK			1.50 H	342	109.8	0.9
4	*5200.00	101.2 AV			1.50 H	342	100.3	0.9
5	5358.80	48.7 PK	74.0	-25.3	1.50 H	342	47.7	1.0
6	5358.80	36.4 AV	54.0	-17.6	1.50 H	342	35.4	1.0
7	#10400.00	55.0 PK	68.2	-13.2	1.88 H	308	43.6	11.4
8	15600.00	50.7 PK	74.0	-23.3	2.09 H	332	40.0	10.7
9	15600.00	36.9 AV	54.0	-17.1	2.09 H	332	26.2	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

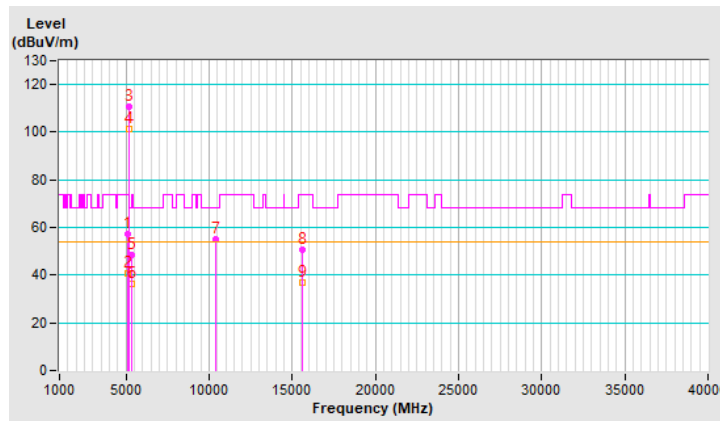


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.60	52.3 PK	74.0	-21.7	1.24 V	261	51.2	1.1
2	5120.60	43.2 AV	54.0	-10.8	1.24 V	261	42.1	1.1
3	*5200.00	117.1 PK			1.24 V	261	116.2	0.9
4	*5200.00	108.8 AV			1.24 V	261	107.9	0.9
5	5358.80	48.7 PK	74.0	-25.3	1.24 V	261	47.7	1.0
6	5358.80	37.7 AV	54.0	-16.3	1.24 V	261	36.7	1.0
7	#10400.00	65.0 PK	68.2	-3.2	1.54 V	360	53.6	11.4
8	15600.00	51.4 PK	74.0	-22.6	2.00 V	257	40.7	10.7
9	15600.00	37.4 AV	54.0	-16.6	2.00 V	257	26.7	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

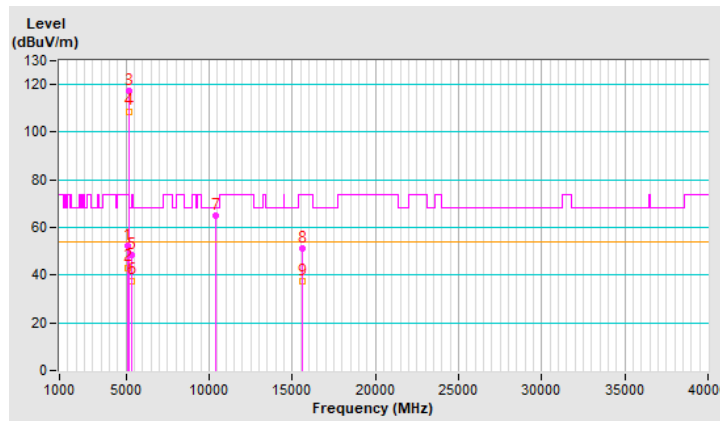


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	110.8 PK			1.53 H	327	109.9	0.9
2	*5240.00	101.5 AV			1.53 H	327	100.6	0.9
3	5401.00	57.2 PK	74.0	-16.8	1.53 H	327	56.3	0.9
4	5401.00	40.5 AV	54.0	-13.5	1.53 H	327	39.6	0.9
5	#10480.00	56.6 PK	68.2	-11.6	1.02 H	214	45.2	11.4
6	15720.00	50.4 PK	74.0	-23.6	2.11 H	317	39.8	10.6
7	15720.00	36.6 AV	54.0	-17.4	2.11 H	317	26.0	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

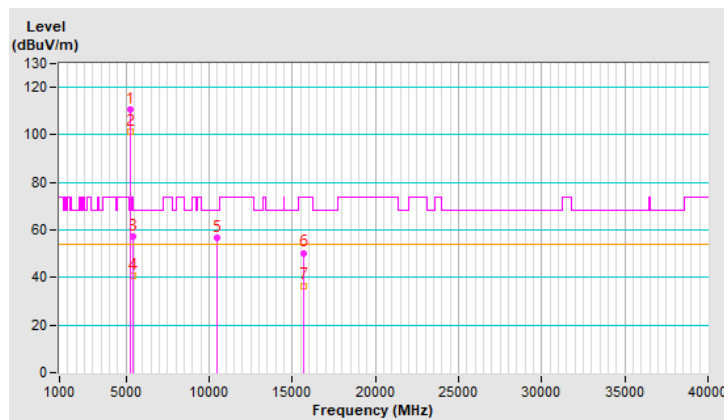


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	116.7 PK			1.28 V	267	115.8	0.9
2	*5240.00	108.5 AV			1.28 V	267	107.6	0.9
3	5401.00	50.0 PK	74.0	-24.0	1.28 V	267	49.1	0.9
4	5401.00	40.7 AV	54.0	-13.3	1.28 V	267	39.8	0.9
5	#10480.00	64.8 PK	68.2	-3.4	2.60 V	360	53.4	11.4
6	15720.00	51.6 PK	74.0	-22.4	2.04 V	266	41.0	10.6
7	15720.00	37.4 AV	54.0	-16.6	2.04 V	266	26.8	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

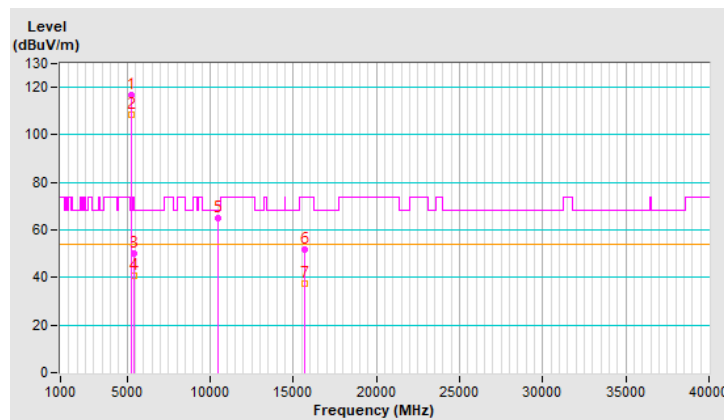


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.6 PK	74.0	-17.4	1.58 H	330	55.5	1.1
2	5150.00	40.1 AV	54.0	-13.9	1.58 H	330	39.0	1.1
3	*5260.00	111.0 PK			1.58 H	330	110.2	0.8
4	*5260.00	101.8 AV			1.58 H	330	101.0	0.8
5	5355.20	47.5 PK	74.0	-26.5	1.58 H	330	46.5	1.0
6	5355.20	36.5 AV	54.0	-17.5	1.58 H	330	35.5	1.0
7	#10520.00	57.1 PK	68.2	-11.1	1.07 H	201	45.7	11.4
8	15780.00	50.6 PK	74.0	-23.4	2.17 H	328	40.1	10.5
9	15780.00	37.0 AV	54.0	-17.0	2.17 H	328	26.5	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

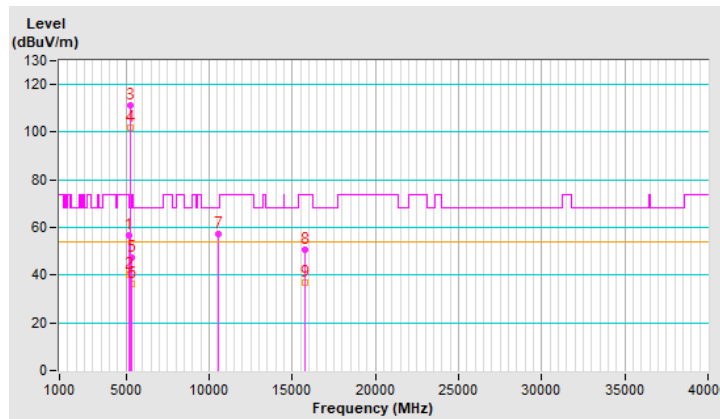


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.3 PK	74.0	-23.7	1.69 V	264	49.2	1.1
2	5150.00	38.9 AV	54.0	-15.1	1.69 V	264	37.8	1.1
3	*5260.00	117.3 PK			1.69 V	264	116.5	0.8
4	*5260.00	109.1 AV			1.69 V	264	108.3	0.8
5	5355.20	48.7 PK	74.0	-25.3	1.69 V	264	47.7	1.0
6	5355.20	38.3 AV	54.0	-15.7	1.69 V	264	37.3	1.0
7	#10520.00	65.0 PK	68.2	-3.2	2.66 V	360	53.6	11.4
8	15780.00	52.5 PK	74.0	-21.5	2.07 V	256	42.0	10.5
9	15780.00	37.4 AV	54.0	-16.6	2.07 V	256	26.9	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

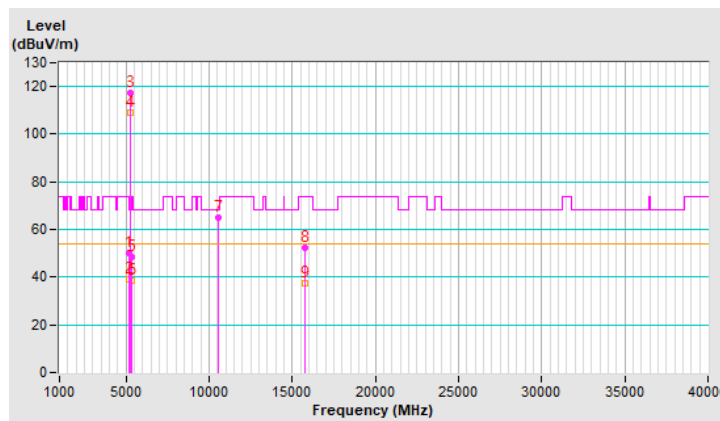


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5138.60	56.5 PK	74.0	-17.5	1.59 H	316	55.3	1.2
2	5138.60	40.2 AV	54.0	-13.8	1.59 H	316	39.0	1.2
3	*5300.00	111.1 PK			1.59 H	316	110.3	0.8
4	*5300.00	101.9 AV			1.59 H	316	101.1	0.8
5	5380.60	51.7 PK	74.0	-22.3	1.59 H	316	50.8	0.9
6	5380.60	43.5 AV	54.0	-10.5	1.59 H	316	42.6	0.9
7	10600.00	56.6 PK	74.0	-17.4	1.06 H	215	45.3	11.3
8	10600.00	43.5 AV	54.0	-10.5	1.06 H	215	32.2	11.3
9	15900.00	50.5 PK	74.0	-23.5	2.09 H	305	40.2	10.3
10	15900.00	36.7 AV	54.0	-17.3	2.09 H	305	26.4	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

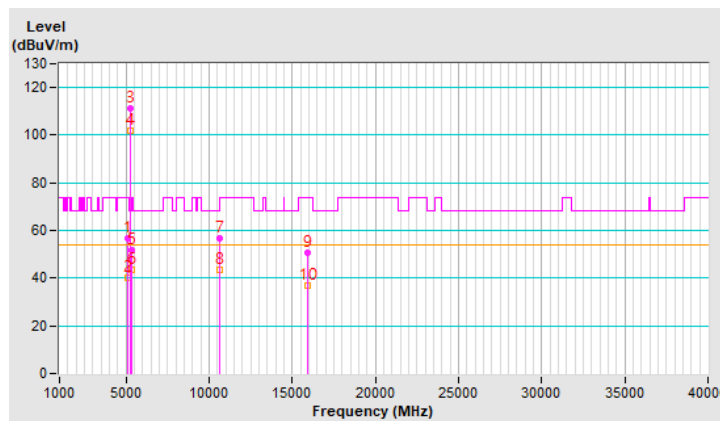


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5138.60	50.2 PK	74.0	-23.8	1.03 V	266	49.0	1.2
2	5138.60	39.5 AV	54.0	-14.5	1.03 V	266	38.3	1.2
3	*5300.00	117.3 PK			1.03 V	266	116.5	0.8
4	*5300.00	109.1 AV			1.03 V	266	108.3	0.8
5	5380.60	53.0 PK	74.0	-21.0	1.03 V	266	52.1	0.9
6	5380.60	45.3 AV	54.0	-8.7	1.03 V	266	44.4	0.9
7	10600.00	64.5 PK	74.0	-9.5	2.54 V	355	53.2	11.3
8	10600.00	51.0 AV	54.0	-3.0	2.54 V	355	39.7	11.3
9	15900.00	52.3 PK	74.0	-21.7	2.10 V	266	42.0	10.3
10	15900.00	37.4 AV	54.0	-16.6	2.10 V	266	27.1	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

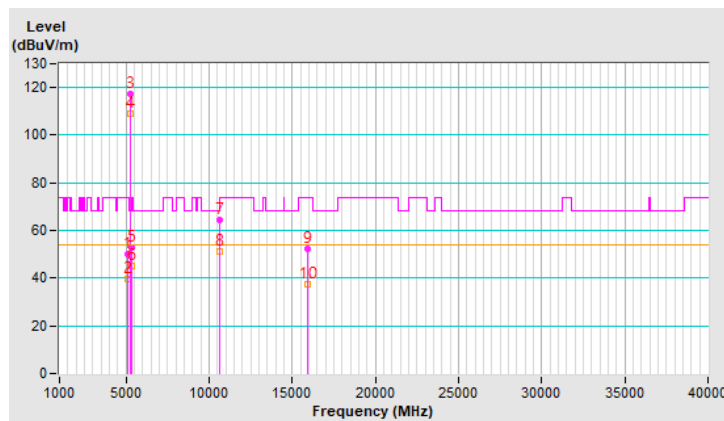


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	109.4 PK			1.44 H	322	108.5	0.9
2	*5320.00	101.8 AV			1.44 H	322	100.9	0.9
3	5350.00	55.9 PK	74.0	-18.1	1.44 H	322	54.9	1.0
4	5350.00	40.9 AV	54.0	-13.1	1.44 H	322	39.9	1.0
5	10640.00	58.2 PK	74.0	-15.8	1.03 H	226	46.9	11.3
6	10640.00	46.4 AV	54.0	-7.6	1.03 H	226	35.1	11.3
7	15960.00	50.9 PK	74.0	-23.1	3.79 H	241	40.2	10.7
8	15960.00	38.2 AV	54.0	-15.8	3.79 H	241	27.5	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

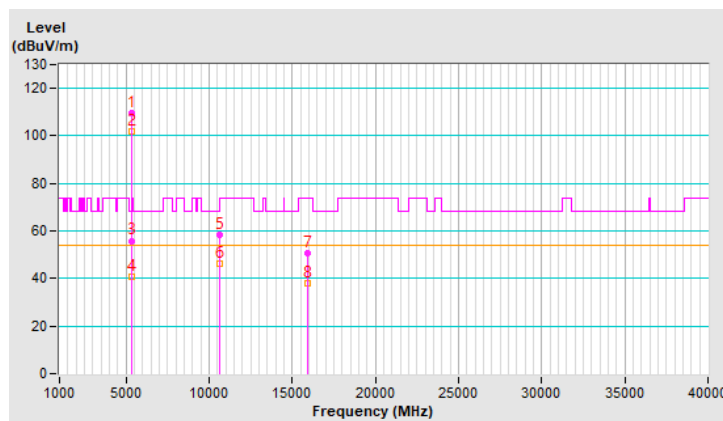


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.3 PK			1.24 V	264	117.4	0.9
2	*5320.00	109.2 AV			1.24 V	264	108.3	0.9
3	5350.00	55.3 PK	74.0	-18.7	1.24 V	264	54.3	1.0
4	5350.00	43.4 AV	54.0	-10.6	1.24 V	264	42.4	1.0
5	10640.00	65.0 PK	74.0	-9.0	2.53 V	360	53.7	11.3
6	10640.00	50.8 AV	54.0	-3.2	2.53 V	360	39.5	11.3
7	15960.00	50.6 PK	74.0	-23.4	3.93 V	360	39.9	10.7
8	15960.00	37.7 AV	54.0	-16.3	3.93 V	360	27.0	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

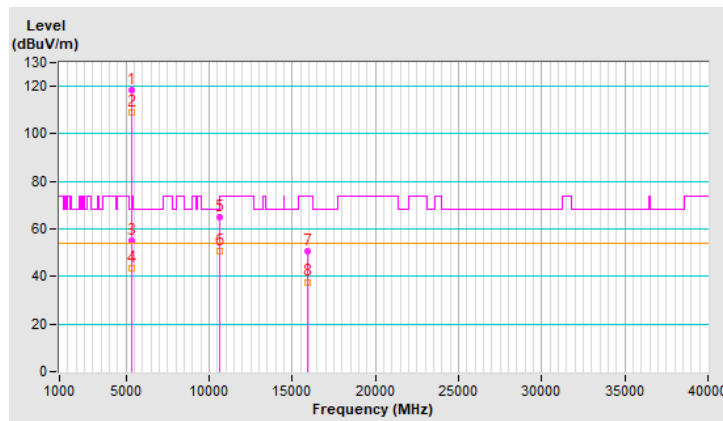


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.3 PK	74.0	-16.7	1.41 H	333	56.3	1.0
2	5460.00	36.8 AV	54.0	-17.2	1.41 H	333	35.8	1.0
3	#5470.00	56.0 PK	68.2	-12.2	1.41 H	333	55.0	1.0
4	*5500.00	110.3 PK			1.41 H	333	109.3	1.0
5	*5500.00	99.2 AV			1.41 H	333	98.2	1.0
6	11000.00	60.0 PK	74.0	-14.0	2.19 H	13	48.1	11.9
7	11000.00	49.2 AV	54.0	-4.8	2.19 H	13	37.3	11.9
8	#16500.00	53.7 PK	68.2	-14.5	3.78 H	266	40.8	12.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

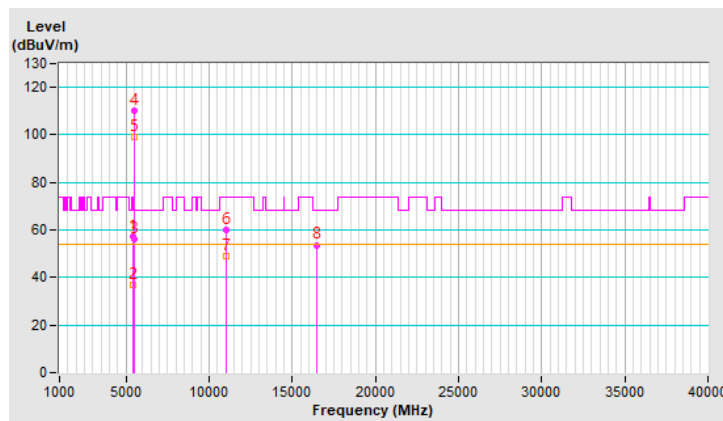


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.2 PK	74.0	-9.8	1.59 V	266	63.2	1.0
2	5460.00	43.6 AV	54.0	-10.4	1.59 V	266	42.6	1.0
3	#5470.00	64.9 PK	68.2	-3.3	1.59 V	266	63.9	1.0
4	*5500.00	118.0 PK			1.59 V	266	117.0	1.0
5	*5500.00	107.7 AV			1.59 V	266	106.7	1.0
6	11000.00	60.3 PK	74.0	-13.7	3.16 V	174	48.4	11.9
7	11000.00	50.8 AV	54.0	-3.2	3.16 V	174	38.9	11.9
8	#16500.00	53.9 PK	68.2	-14.3	3.98 V	360	41.0	12.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

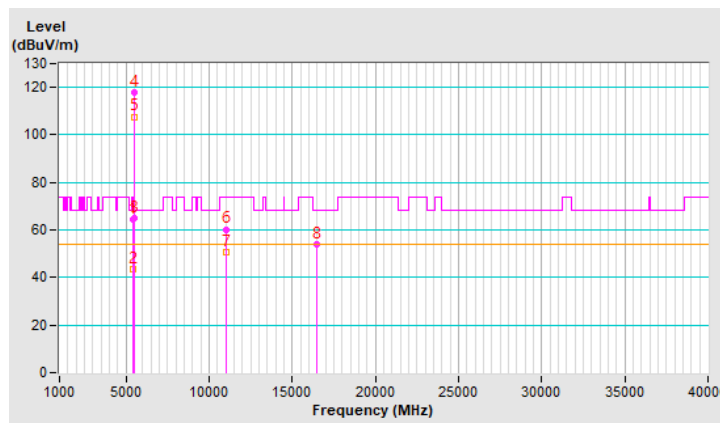


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5419.10	43.4 PK	74.0	-30.6	1.39 H	340	42.5	0.9
2	5419.10	38.2 AV	54.0	-15.8	1.39 H	340	37.3	0.9
3	*5580.00	109.4 PK			1.39 H	340	108.3	1.1
4	*5580.00	98.8 AV			1.39 H	340	97.7	1.1
5	#5779.10	48.7 PK	68.2	-19.5	1.39 H	340	47.1	1.6
6	11160.00	58.3 PK	74.0	-15.7	2.32 H	294	46.9	11.4
7	11160.00	46.4 AV	54.0	-7.6	2.32 H	294	35.0	11.4
8	#16740.00	49.4 PK	68.2	-18.8	3.78 H	244	35.5	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

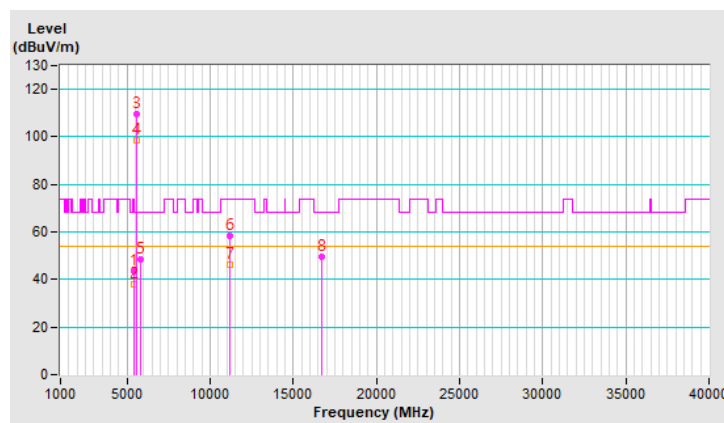


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5419.10	50.3 PK	74.0	-23.7	1.59 V	240	49.4	0.9
2	5419.10	38.6 AV	54.0	-15.4	1.59 V	240	37.7	0.9
3	*5580.00	117.5 PK			1.59 V	240	116.4	1.1
4	*5580.00	108.5 AV			1.59 V	240	107.4	1.1
5	#5779.10	49.1 PK	68.2	-19.1	1.59 V	240	47.5	1.6
6	11160.00	63.1 PK	74.0	-10.9	2.63 V	313	51.7	11.4
7	11160.00	50.7 AV	54.0	-3.3	2.63 V	313	39.3	11.4
8	#16740.00	49.1 PK	68.2	-19.1	3.98 V	360	35.2	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

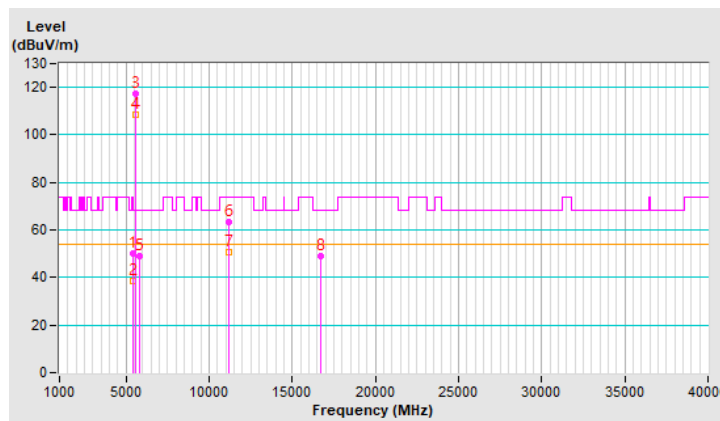


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	111.4 PK			1.42 H	360	110.0	1.4
2	*5700.00	102.2 AV			1.42 H	360	100.8	1.4
3	#5725.00	62.8 PK	68.2	-5.4	1.42 H	360	61.3	1.5
4	11400.00	59.6 PK	74.0	-14.4	2.27 H	289	47.7	11.9
5	11400.00	47.2 AV	54.0	-6.8	2.27 H	289	35.3	11.9
6	#17100.00	44.8 PK	68.2	-23.4	3.80 H	250	29.9	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

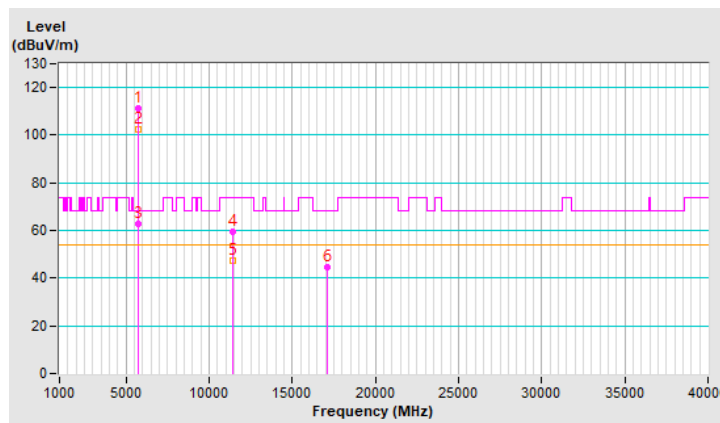


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	111.8 PK			1.73 V	270	110.4	1.4
2	*5700.00	102.6 AV			1.73 V	270	101.2	1.4
3	#5725.00	63.4 PK	68.2	-4.8	1.73 V	270	61.9	1.5
4	11400.00	63.6 PK	74.0	-10.4	2.46 V	302	51.7	11.9
5	11400.00	50.8 AV	54.0	-3.2	2.46 V	302	38.9	11.9
6	#17100.00	48.4 PK	68.2	-19.8	3.76 V	350	33.5	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

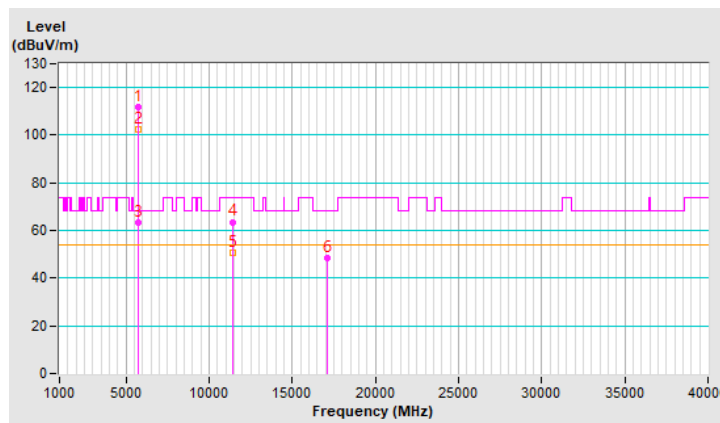


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	46.6 PK	74.0	-27.4	1.21 H	106	45.6	1.0
2	5460.00	36.5 AV	54.0	-17.5	1.21 H	106	35.5	1.0
3	#5470.00	47.1 PK	68.2	-21.1	1.21 H	106	46.1	1.0
4	*5720.00	108.6 PK			1.21 H	106	107.1	1.5
5	*5720.00	100.9 AV			1.21 H	106	99.4	1.5
6	#5850.00	45.9 PK	68.2	-22.3	1.21 H	106	44.1	1.8
7	11440.00	61.8 PK	74.0	-12.2	2.27 H	292	49.9	11.9
8	11440.00	45.2 AV	54.0	-8.8	2.27 H	292	33.3	11.9
9	#17160.00	50.4 PK	68.2	-17.8	3.80 H	256	35.4	15.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

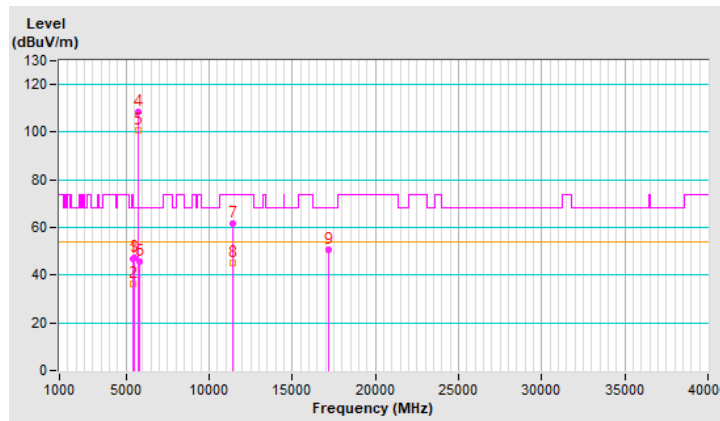


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	48.0 PK	74.0	-26.0	1.64 V	230	47.0	1.0
2	5460.00	37.6 AV	54.0	-16.4	1.64 V	230	36.6	1.0
3	#5470.00	47.5 PK	68.2	-20.7	1.64 V	230	46.5	1.0
4	*5720.00	116.4 PK			1.64 V	230	114.9	1.5
5	*5720.00	106.5 AV			1.64 V	230	105.0	1.5
6	#5850.00	48.6 PK	68.2	-19.6	1.64 V	230	46.8	1.8
7	11440.00	65.8 PK	74.0	-8.2	3.96 V	360	53.9	11.9
8	11440.00	49.2 AV	54.0	-4.8	3.96 V	360	37.3	11.9
9	#17160.00	54.4 PK	68.2	-13.8	3.98 V	360	39.4	15.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

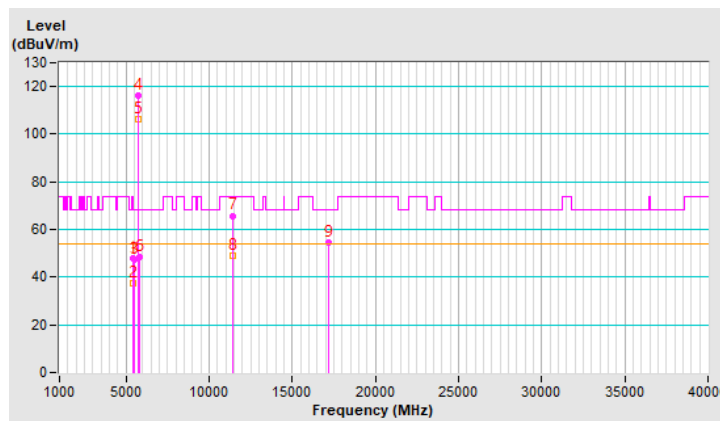


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5617.56	49.5 PK	68.2	-18.7	2.03 H	339	48.3	1.2
2	*5745.00	112.2 PK			2.03 H	339	110.7	1.5
3	*5745.00	103.0 AV			2.03 H	339	101.5	1.5
4	#5928.37	48.9 PK	68.2	-19.3	2.03 H	339	46.9	2.0
5	11490.00	64.3 PK	74.0	-9.7	2.27 H	29	52.4	11.9
6	11490.00	50.5 AV	54.0	-3.5	2.27 H	29	38.6	11.9
7	#17235.00	54.0 PK	68.2	-14.2	3.74 H	271	38.8	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

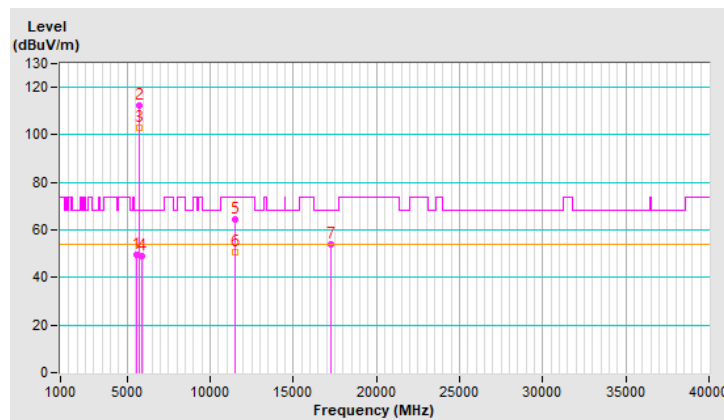


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5636.26	56.3 PK	68.2	-11.9	1.51 V	272	55.1	1.2
2	*5745.00	119.6 PK			1.51 V	272	118.1	1.5
3	*5745.00	111.6 AV			1.51 V	272	110.1	1.5
4	#5941.17	51.7 PK	68.2	-16.5	1.51 V	272	49.7	2.0
5	11490.00	64.8 PK	74.0	-9.2	3.94 V	342	52.9	11.9
6	11490.00	51.0 AV	54.0	-3.0	3.94 V	342	39.1	11.9
7	#17235.00	53.8 PK	68.2	-14.4	4.00 V	360	38.6	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

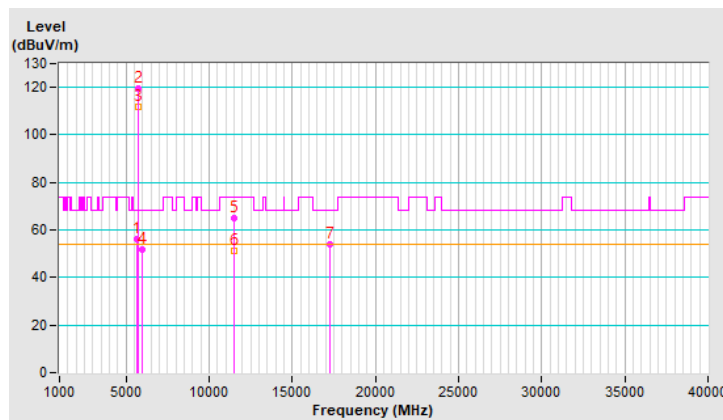


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5604.16	48.4 PK	68.2	-19.8	2.03 H	341	47.2	1.2
2	*5785.00	110.7 PK			2.03 H	341	109.1	1.6
3	*5785.00	100.7 AV			2.03 H	341	99.1	1.6
4	#5951.87	49.4 PK	68.2	-18.8	2.03 H	341	47.3	2.1
5	11570.00	63.2 PK	74.0	-10.8	2.26 H	15	51.3	11.9
6	11570.00	50.2 AV	54.0	-3.8	2.26 H	15	38.3	11.9
7	#17355.00	53.0 PK	68.2	-15.2	3.73 H	241	36.9	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

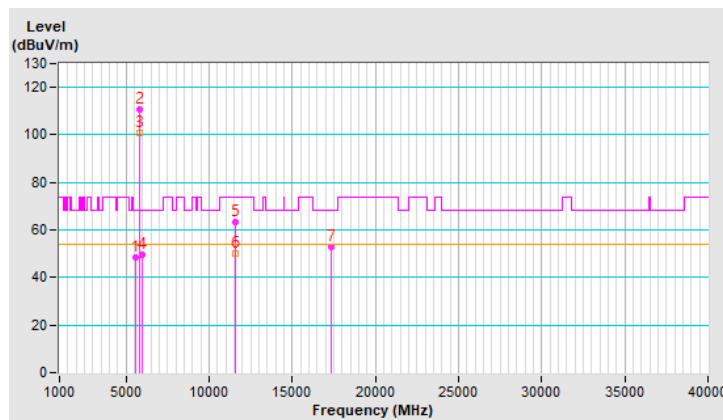


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.30	51.5 PK	68.2	-16.7	1.64 V	298	50.3	1.2
2	*5785.00	119.4 PK			1.64 V	298	117.8	1.6
3	*5785.00	109.2 AV			1.64 V	298	107.6	1.6
4	#5963.30	51.1 PK	68.2	-17.1	1.64 V	298	49.0	2.1
5	11570.00	63.6 PK	74.0	-10.4	3.99 V	176	51.7	11.9
6	11570.00	50.7 AV	54.0	-3.3	3.99 V	176	38.8	11.9
7	#17355.00	53.0 PK	68.2	-15.2	3.96 V	360	36.9	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

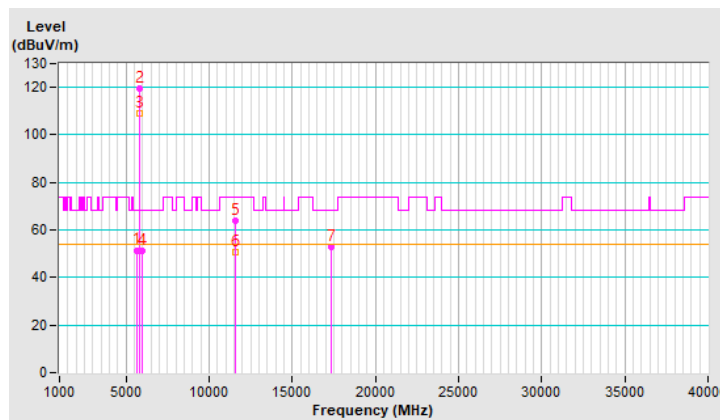


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5628.86	55.6 PK	68.2	-12.6	2.01 H	356	54.4	1.2
2	*5825.00	103.5 PK			2.01 H	356	101.7	1.8
3	*5825.00	92.9 AV			2.01 H	356	91.1	1.8
4	#5922.77	57.4 PK	68.2	-10.8	2.01 H	356	55.4	2.0
5	11650.00	61.8 PK	74.0	-12.2	2.24 H	19	50.1	11.7
6	11650.00	50.6 AV	54.0	-3.4	2.24 H	19	38.9	11.7
7	#17475.00	49.2 PK	68.2	-19.0	3.82 H	264	31.9	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

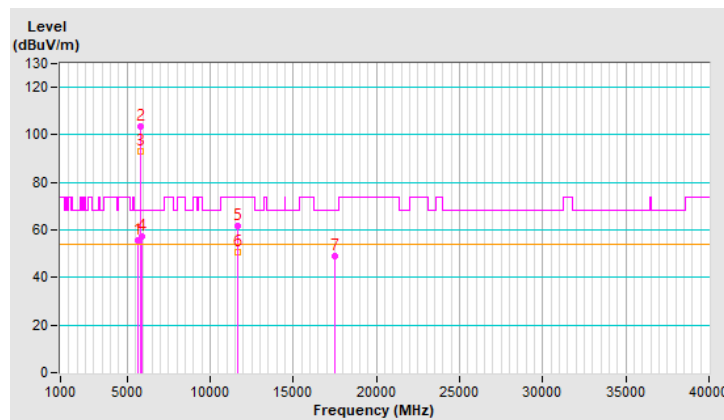


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5616.66	48.9 PK	68.2	-19.3	1.58 V	280	47.7	1.2
2	*5825.00	114.9 PK			1.58 V	280	113.1	1.8
3	*5825.00	105.1 AV			1.58 V	280	103.3	1.8
4	#5924.57	52.0 PK	68.2	-16.2	1.58 V	280	50.0	2.0
5	11650.00	62.0 PK	74.0	-12.0	3.97 V	206	50.3	11.7
6	11650.00	50.9 AV	54.0	-3.1	3.97 V	206	39.2	11.7
7	#17475.00	49.2 PK	68.2	-19.0	3.90 V	360	31.9	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

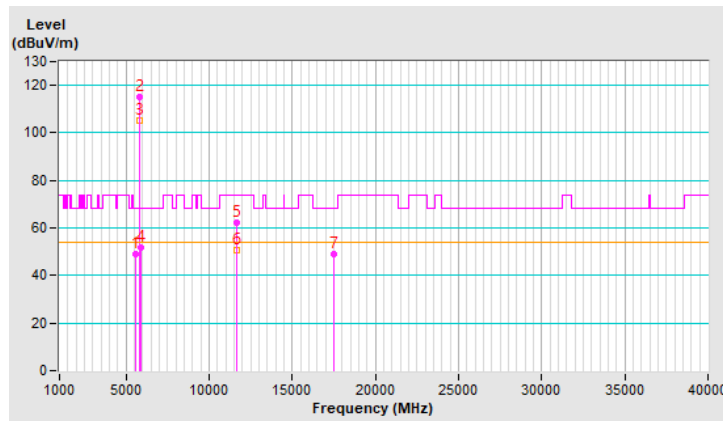


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.4 PK	74.0	-17.6	1.56 H	110	55.3	1.1
2	5150.00	43.2 AV	54.0	-10.8	1.56 H	110	42.1	1.1
3	*5180.00	106.7 PK			1.56 H	110	105.7	1.0
4	*5180.00	99.2 AV			1.56 H	110	98.2	1.0
5	#10360.00	61.6 PK	68.2	-6.6	3.10 H	350	50.4	11.2
6	15540.00	52.6 PK	74.0	-21.4	1.94 H	274	41.7	10.9
7	15540.00	36.1 AV	54.0	-17.9	1.94 H	274	25.2	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

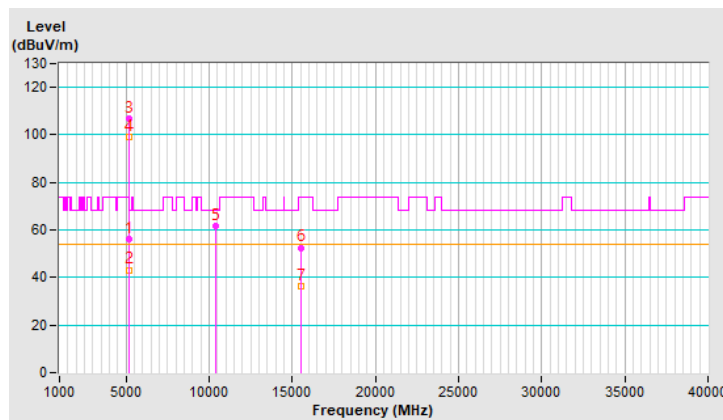


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.4 PK	74.0	-10.6	1.75 V	250	62.3	1.1
2	5150.00	42.6 AV	54.0	-11.4	1.75 V	250	41.5	1.1
3	*5180.00	112.2 PK			1.75 V	250	111.2	1.0
4	*5180.00	103.4 AV			1.75 V	250	102.4	1.0
5	#10360.00	64.9 PK	68.2	-3.3	3.20 V	354	53.7	11.2
6	15540.00	52.6 PK	74.0	-21.4	2.33 V	250	41.7	10.9
7	15540.00	36.4 AV	54.0	-17.6	2.33 V	250	25.5	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

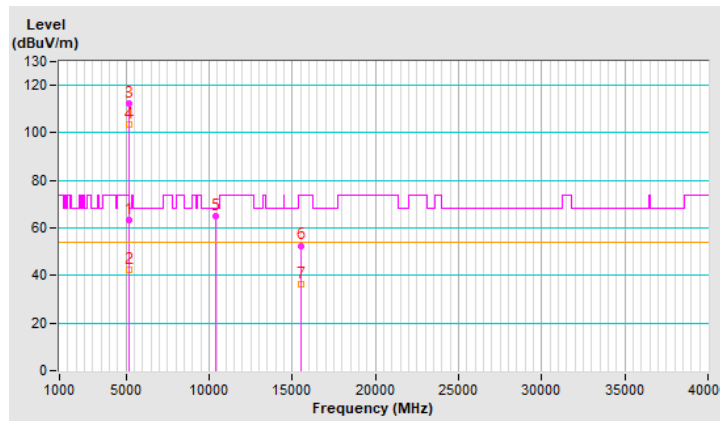


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.60	60.4 PK	74.0	-13.6	1.53 H	115	59.3	1.1
2	5120.60	40.3 AV	54.0	-13.7	1.53 H	115	39.2	1.1
3	*5200.00	104.3 PK			1.53 H	115	103.4	0.9
4	*5200.00	96.1 AV			1.53 H	115	95.2	0.9
5	5358.80	49.7 PK	74.0	-24.3	1.53 H	115	48.7	1.0
6	5358.80	39.3 AV	54.0	-14.7	1.53 H	115	38.3	1.0
7	#10400.00	64.9 PK	68.2	-3.3	3.11 H	344	53.5	11.4
8	15600.00	52.3 PK	74.0	-21.7	2.02 H	263	41.6	10.7
9	15600.00	39.2 AV	54.0	-14.8	2.02 H	263	28.5	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

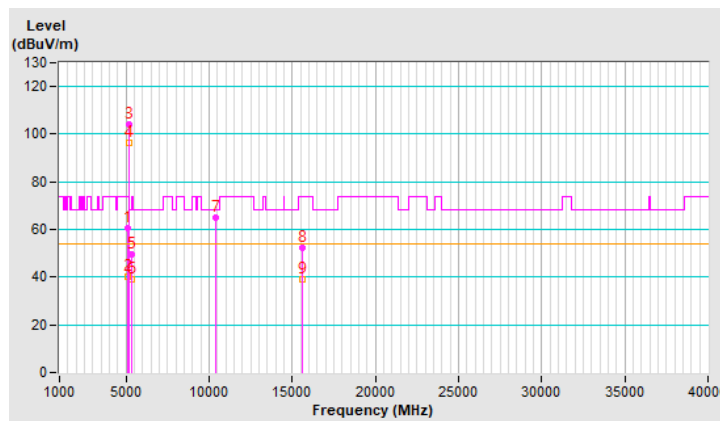


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.60	59.2 PK	74.0	-14.8	1.38 V	264	58.1	1.1
2	5120.60	43.1 AV	54.0	-10.9	1.38 V	264	42.0	1.1
3	*5200.00	116.2 PK			1.38 V	264	115.3	0.9
4	*5200.00	107.7 AV			1.38 V	264	106.8	0.9
5	5358.80	49.7 PK	74.0	-24.3	1.38 V	264	48.7	1.0
6	5358.80	39.1 AV	54.0	-14.9	1.38 V	264	38.1	1.0
7	#10400.00	65.1 PK	68.2	-3.1	1.52 V	350	53.7	11.4
8	15600.00	51.9 PK	74.0	-22.1	2.11 V	299	41.2	10.7
9	15600.00	38.9 AV	54.0	-15.1	2.11 V	299	28.2	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

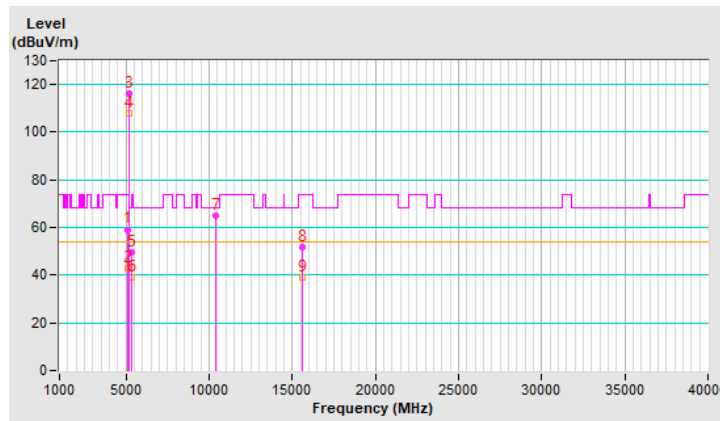


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5131.70	52.4 PK	74.0	-21.6	1.62 H	105	51.2	1.2
2	5131.70	37.0 AV	54.0	-17.0	1.62 H	105	35.8	1.2
3	*5240.00	104.8 PK			1.62 H	105	103.9	0.9
4	*5240.00	96.7 AV			1.62 H	105	95.8	0.9
5	5351.60	49.8 PK	74.0	-24.2	1.62 H	105	48.8	1.0
6	5351.60	38.2 AV	54.0	-15.8	1.62 H	105	37.2	1.0
7	#10480.00	64.8 PK	68.2	-3.4	3.01 H	354	53.4	11.4
8	15720.00	52.0 PK	74.0	-22.0	1.95 H	280	41.4	10.6
9	15720.00	39.1 AV	54.0	-14.9	1.95 H	280	28.5	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

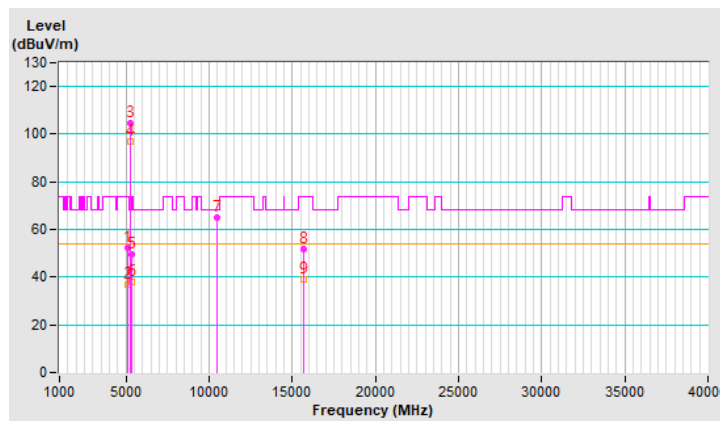


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5131.70	51.2 PK	74.0	-22.8	1.34 V	264	50.0	1.2
2	5131.70	39.8 AV	54.0	-14.2	1.34 V	264	38.6	1.2
3	*5240.00	116.7 PK			1.34 V	264	115.8	0.9
4	*5240.00	108.3 AV			1.34 V	264	107.4	0.9
5	5351.60	50.3 PK	74.0	-23.7	1.34 V	264	49.3	1.0
6	5351.60	38.7 AV	54.0	-15.3	1.34 V	264	37.7	1.0
7	#10480.00	65.0 PK	68.2	-3.2	1.46 V	358	53.6	11.4
8	15720.00	52.1 PK	74.0	-21.9	2.15 V	289	41.5	10.6
9	15720.00	39.1 AV	54.0	-14.9	2.15 V	289	28.5	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

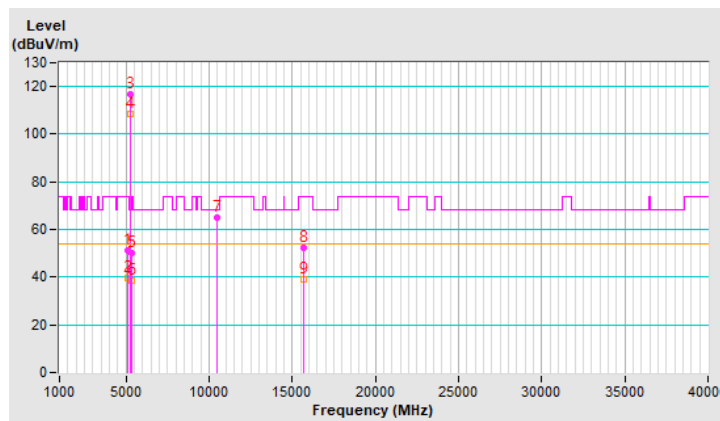


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.0 PK	74.0	-21.0	1.62 H	97	51.9	1.1
2	5150.00	37.3 AV	54.0	-16.7	1.62 H	97	36.2	1.1
3	*5260.00	105.7 PK			1.62 H	97	104.9	0.8
4	*5260.00	96.9 AV			1.62 H	97	96.1	0.8
5	5355.20	50.4 PK	74.0	-23.6	1.62 H	97	49.4	1.0
6	5355.20	38.8 AV	54.0	-15.2	1.62 H	97	37.8	1.0
7	#10520.00	64.0 PK	68.2	-4.2	3.06 H	360	52.6	11.4
8	15780.00	51.8 PK	74.0	-22.2	1.92 H	268	41.3	10.5
9	15780.00	38.4 AV	54.0	-15.6	1.92 H	268	27.9	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

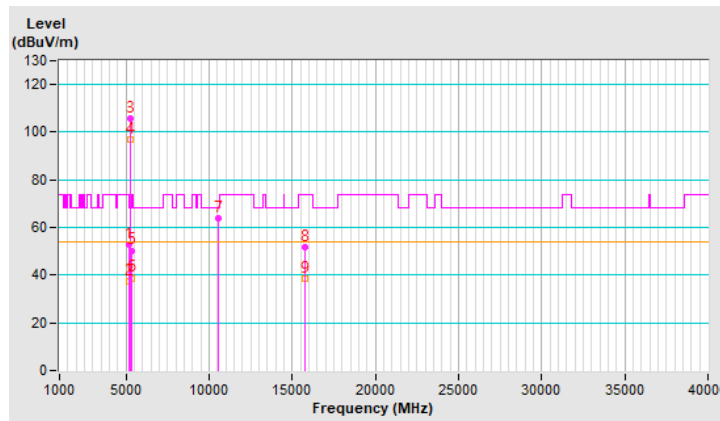


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.8 PK	74.0	-22.2	1.10 V	266	50.7	1.1
2	5150.00	40.1 AV	54.0	-13.9	1.10 V	266	39.0	1.1
3	*5260.00	117.6 PK			1.10 V	266	116.8	0.8
4	*5260.00	108.5 AV			1.10 V	266	107.7	0.8
5	5355.20	50.5 PK	74.0	-23.5	1.10 V	266	49.5	1.0
6	5355.20	39.1 AV	54.0	-14.9	1.10 V	266	38.1	1.0
7	#10520.00	65.1 PK	68.2	-3.1	1.52 V	342	53.7	11.4
8	15780.00	51.8 PK	74.0	-22.2	2.10 V	297	41.3	10.5
9	15780.00	38.5 AV	54.0	-15.5	2.10 V	297	28.0	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

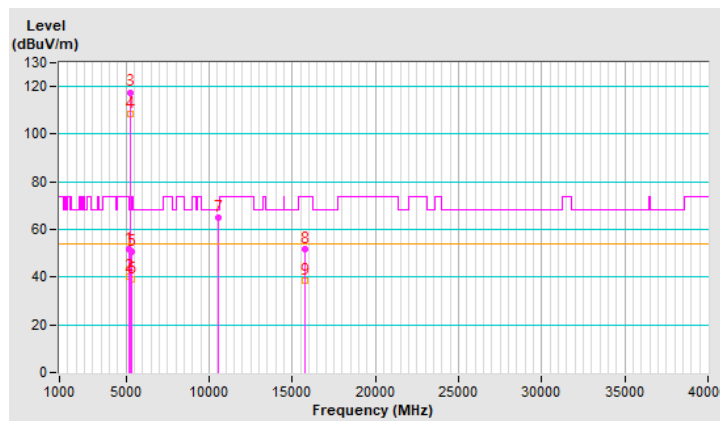


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5138.60	52.2 PK	74.0	-21.8	1.60 H	104	51.0	1.2
2	5138.60	37.9 AV	54.0	-16.1	1.60 H	104	36.7	1.2
3	*5300.00	106.0 PK			1.60 H	104	105.2	0.8
4	*5300.00	96.7 AV			1.60 H	104	95.9	0.8
5	5380.60	66.7 PK	74.0	-7.3	1.60 H	104	65.8	0.9
6	5380.60	47.4 AV	54.0	-6.6	1.60 H	104	46.5	0.9
7	10600.00	62.9 PK	74.0	-11.1	3.09 H	359	51.6	11.3
8	10600.00	50.5 AV	54.0	-3.5	3.09 H	359	39.2	11.3
9	15900.00	55.7 PK	74.0	-18.3	1.91 H	286	45.4	10.3
10	15900.00	44.2 AV	54.0	-9.8	1.91 H	286	33.9	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

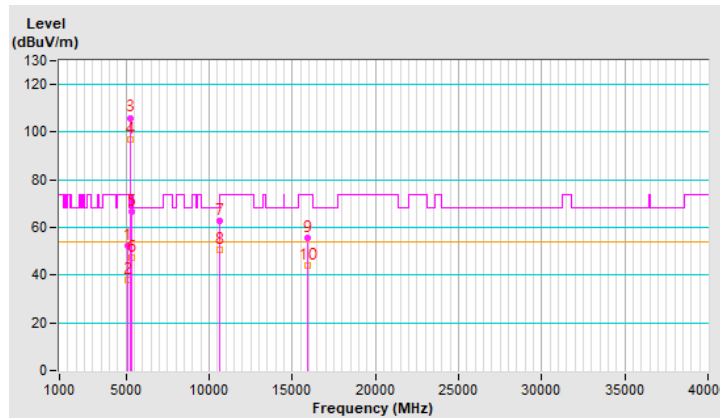


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5138.60	51.0 PK	74.0	-23.0	1.18 V	262	49.8	1.2
2	5138.60	40.7 AV	54.0	-13.3	1.18 V	262	39.5	1.2
3	*5300.00	118.0 PK			1.18 V	262	117.2	0.8
4	*5300.00	108.3 AV			1.18 V	262	107.5	0.8
5	5380.60	66.5 PK	74.0	-7.5	1.18 V	262	65.6	0.9
6	5380.60	47.2 AV	54.0	-6.8	1.18 V	262	46.3	0.9
7	10600.00	63.1 PK	74.0	-10.9	1.50 V	336	51.8	11.3
8	10600.00	50.8 AV	54.0	-3.2	1.50 V	336	39.5	11.3
9	15900.00	55.8 PK	74.0	-18.2	2.84 V	360	45.5	10.3
10	15900.00	44.3 AV	54.0	-9.7	2.84 V	360	34.0	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

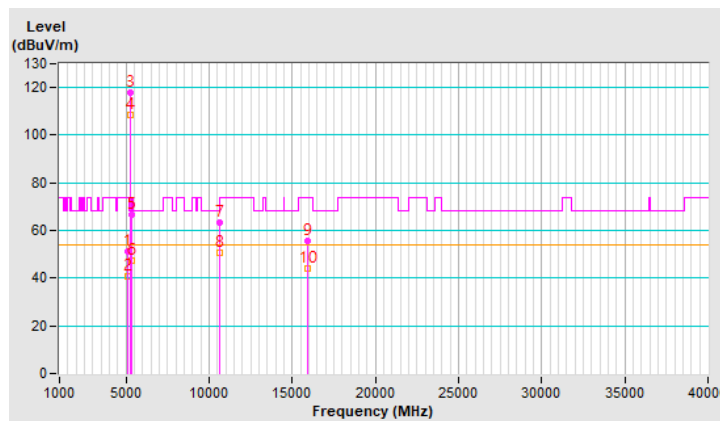

RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	30°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	106.0 PK			1.59 H	109	105.1	0.9
2	*5320.00	96.7 AV			1.59 H	109	95.8	0.9
3	5350.00	52.2 PK	74.0	-21.8	1.59 H	109	51.2	1.0
4	5350.00	37.9 AV	54.0	-16.1	1.59 H	109	36.9	1.0
5	10640.00	62.1 PK	74.0	-11.9	3.10 H	354	50.8	11.3
6	10640.00	50.5 AV	54.0	-3.5	3.10 H	354	39.2	11.3
7	15960.00	48.0 PK	74.0	-26.0	1.98 H	279	37.3	10.7
8	15960.00	34.7 AV	54.0	-19.3	1.98 H	279	24.0	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

