


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5566.13	51.3 PK	68.2	-16.9	3.20 H	156	50.2	1.1
2	*5825.00	116.5 PK			3.20 H	156	114.7	1.8
3	*5825.00	107.4 AV			3.20 H	156	105.6	1.8
4	#5981.37	50.3 PK	68.2	-17.9	3.20 H	156	48.2	2.1
5	11650.00	61.8 PK	74.0	-12.2	3.76 H	155	50.1	11.7
6	11650.00	46.5 AV	54.0	-7.5	3.76 H	155	34.8	11.7
7	#17475.00	61.6 PK	68.2	-6.6	2.19 H	171	44.3	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

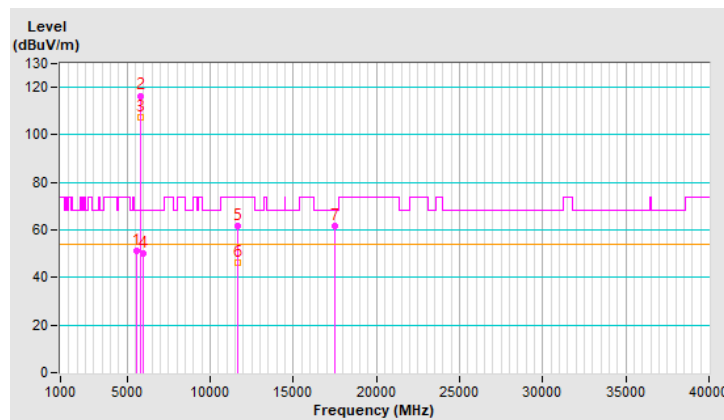


RF Mode	20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5571.30	51.0 PK	68.2	-17.2	3.52 V	166	49.9	1.1
2	*5825.00	109.4 PK			3.52 V	166	107.6	1.8
3	*5825.00	99.5 AV			3.52 V	166	97.7	1.8
4	#5947.87	51.7 PK	68.2	-16.5	3.52 V	166	49.6	2.1
5	11650.00	57.4 PK	74.0	-16.6	3.52 V	82	45.7	11.7
6	11650.00	42.2 AV	54.0	-11.8	3.52 V	82	30.5	11.7
7	#17475.00	60.4 PK	68.2	-7.8	3.41 V	88	43.1	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

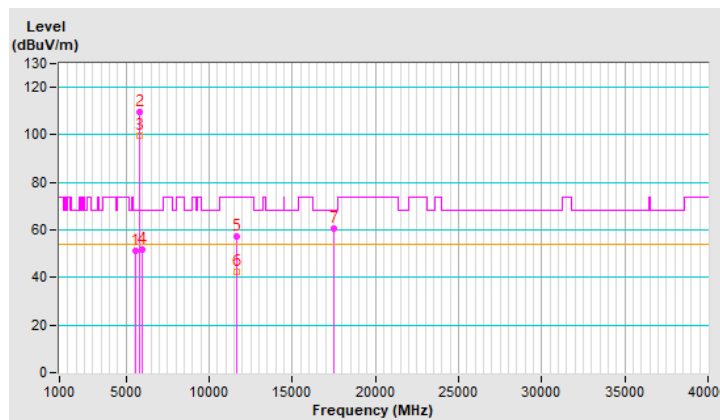


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.2 PK	74.0	-1.8	3.11 H	158	71.1	1.1
2	5150.00	46.5 AV	54.0	-7.5	3.11 H	158	45.4	1.1
3	*5180.00	118.3 PK			3.11 H	158	117.3	1.0
4	*5180.00	107.3 AV			3.11 H	158	106.3	1.0
5	#10360.00	58.3 PK	68.2	-9.9	1.45 H	147	47.1	11.2
6	15540.00	46.2 PK	74.0	-27.8	2.70 H	79	35.3	10.9
7	15540.00	35.4 AV	54.0	-18.6	2.70 H	79	24.5	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

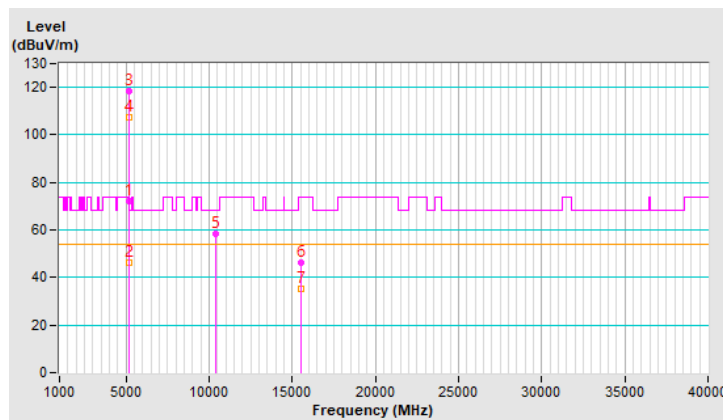


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.8 PK	74.0	-8.2	3.44 V	154	64.7	1.1
2	5150.00	41.1 AV	54.0	-12.9	3.44 V	154	40.0	1.1
3	*5180.00	108.8 PK			3.44 V	154	107.8	1.0
4	*5180.00	98.5 AV			3.44 V	154	97.5	1.0
5	#10360.00	54.3 PK	68.2	-13.9	3.45 V	81	43.1	11.2
6	15540.00	45.4 PK	74.0	-28.6	3.33 V	71	34.5	10.9
7	15540.00	34.5 AV	54.0	-19.5	3.33 V	71	23.6	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

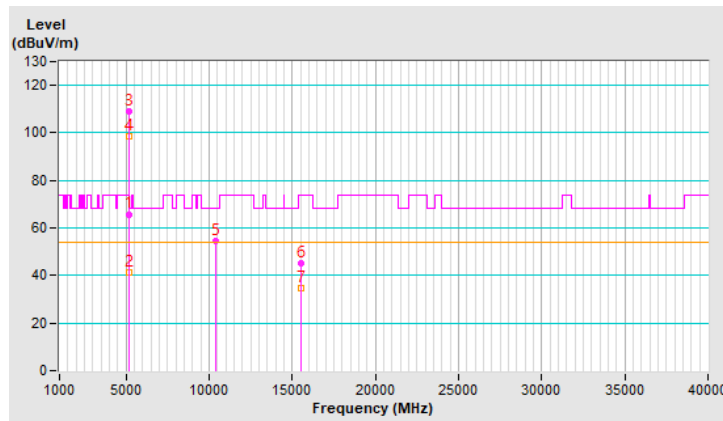


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	121.0 PK			3.25 H	166	120.1	0.9
2	*5200.00	111.4 AV			3.25 H	166	110.5	0.9
3	#10400.00	61.5 PK	68.2	-6.7	1.64 H	155	50.1	11.4
4	15600.00	53.4 PK	74.0	-20.6	2.71 H	71	42.7	10.7
5	15600.00	39.5 AV	54.0	-14.5	2.71 H	71	28.8	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

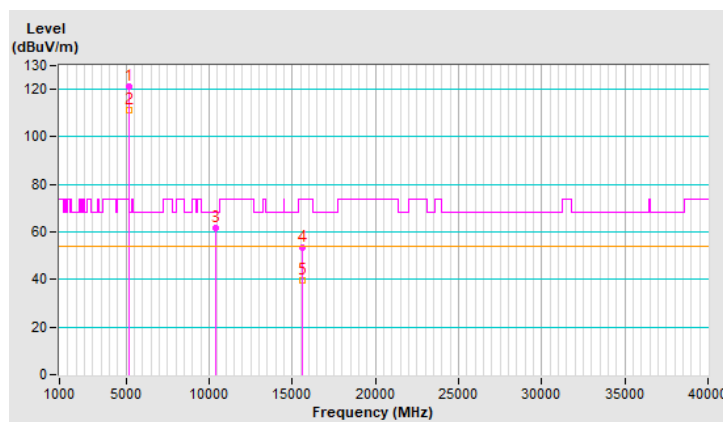


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	109.4 PK			3.45 V	155	108.5	0.9
2	*5200.00	99.5 AV			3.45 V	155	98.6	0.9
3	#10400.00	57.6 PK	68.2	-10.6	3.25 V	88	46.2	11.4
4	15600.00	49.4 PK	74.0	-24.6	3.31 V	97	38.7	10.7
5	15600.00	35.3 AV	54.0	-18.7	3.31 V	97	24.6	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

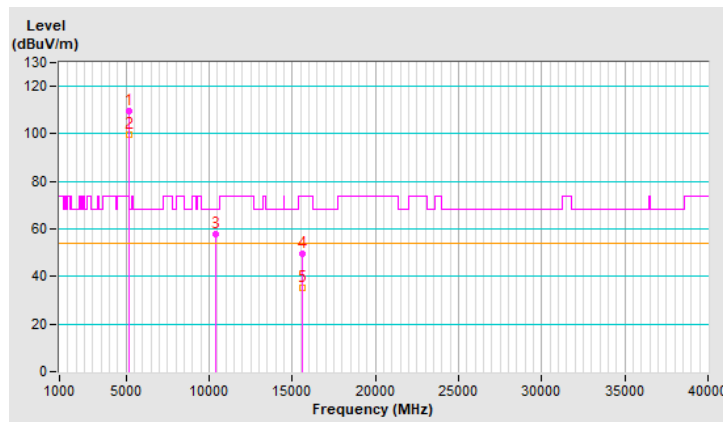


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	120.1 PK			3.44 H	165	119.2	0.9
2	*5240.00	110.3 AV			3.44 H	165	109.4	0.9
3	5350.00	50.5 PK	74.0	-23.5	3.44 H	165	49.5	1.0
4	5350.00	38.5 AV	54.0	-15.5	3.44 H	165	37.5	1.0
5	#10480.00	60.2 PK	68.2	-8.0	1.66 H	155	48.8	11.4
6	15720.00	52.4 PK	74.0	-21.6	2.41 H	36	41.8	10.6
7	15720.00	38.6 AV	54.0	-15.4	2.41 H	36	28.0	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

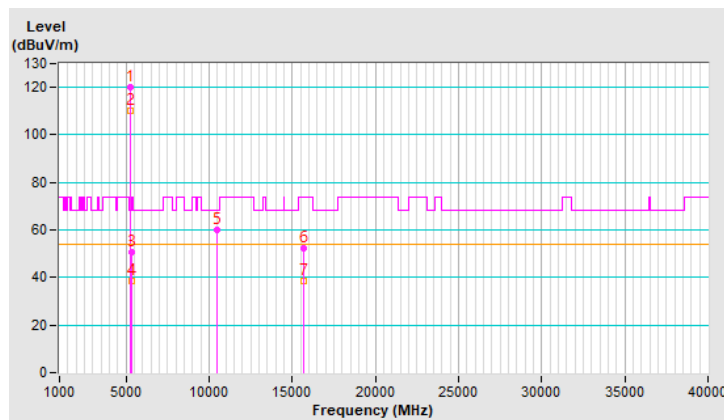


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	108.3 PK			3.41 V	145	107.4	0.9
2	*5240.00	98.6 AV			3.41 V	145	97.7	0.9
3	5350.00	50.4 PK	74.0	-23.6	3.41 V	145	49.4	1.0
4	5350.00	38.4 AV	54.0	-15.6	3.41 V	145	37.4	1.0
5	#10480.00	56.4 PK	68.2	-11.8	3.45 V	85	45.0	11.4
6	15720.00	48.4 PK	74.0	-25.6	3.44 V	97	37.8	10.6
7	15720.00	34.2 AV	54.0	-19.8	3.44 V	97	23.6	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

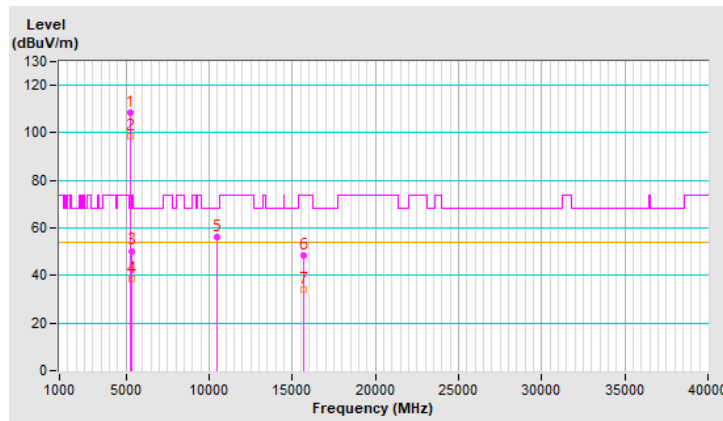


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.4 PK	74.0	-22.6	3.24 H	155	50.3	1.1
2	5150.00	38.5 AV	54.0	-15.5	3.24 H	155	37.4	1.1
3	*5260.00	119.4 PK			3.24 H	155	118.6	0.8
4	*5260.00	109.5 AV			3.24 H	155	108.7	0.8
5	#10520.00	60.4 PK	68.2	-7.8	1.64 H	145	49.0	11.4
6	15780.00	52.6 PK	74.0	-21.4	2.44 H	82	42.1	10.5
7	15780.00	38.5 AV	54.0	-15.5	2.44 H	82	28.0	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

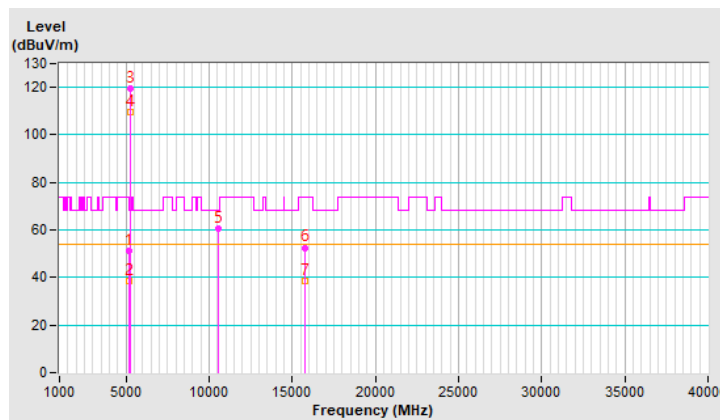


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.4 PK	74.0	-23.6	3.12 V	155	49.3	1.1
2	5150.00	38.6 AV	54.0	-15.4	3.12 V	155	37.5	1.1
3	*5260.00	107.4 PK			3.12 V	155	106.6	0.8
4	*5260.00	97.4 AV			3.12 V	155	96.6	0.8
5	#10520.00	56.4 PK	68.2	-11.8	3.22 V	87	45.0	11.4
6	15780.00	48.5 PK	74.0	-25.5	3.28 V	91	38.0	10.5
7	15780.00	34.5 AV	54.0	-19.5	3.28 V	91	24.0	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

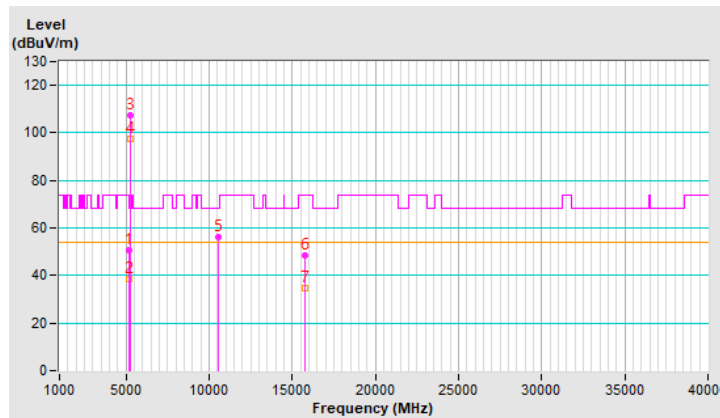


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5300.00	120.4 PK			3.11 H	154	119.6	0.8
2	*5300.00	110.3 AV			3.11 H	154	109.5	0.8
3	10600.00	60.9 PK	74.0	-13.1	1.66 H	152	49.6	11.3
4	10600.00	51.2 AV	54.0	-2.8	1.66 H	152	39.9	11.3
5	15900.00	50.4 PK	74.0	-23.6	2.41 H	83	40.1	10.3
6	15900.00	39.5 AV	54.0	-14.5	2.41 H	83	29.2	10.3

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

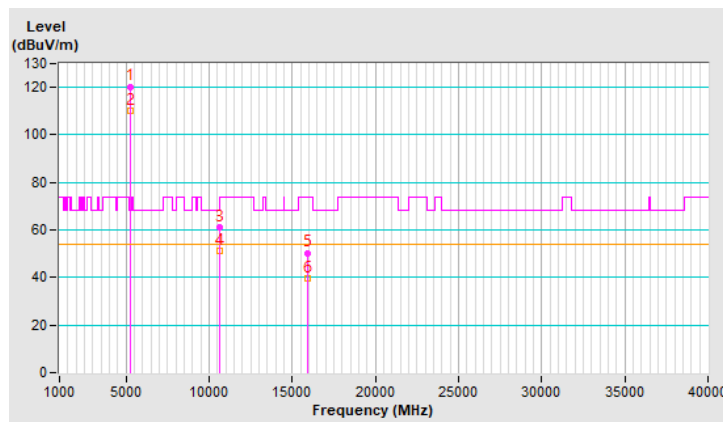


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	108.4 PK			3.22 V	152	107.6	0.8
2	*5300.00	98.5 AV			3.22 V	152	97.7	0.8
3	10600.00	56.6 PK	74.0	-17.4	3.25 V	89	45.3	11.3
4	10600.00	46.6 AV	54.0	-7.4	3.25 V	89	35.3	11.3
5	15900.00	46.4 PK	74.0	-27.6	3.41 V	96	36.1	10.3
6	15900.00	35.4 AV	54.0	-18.6	3.41 V	96	25.1	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

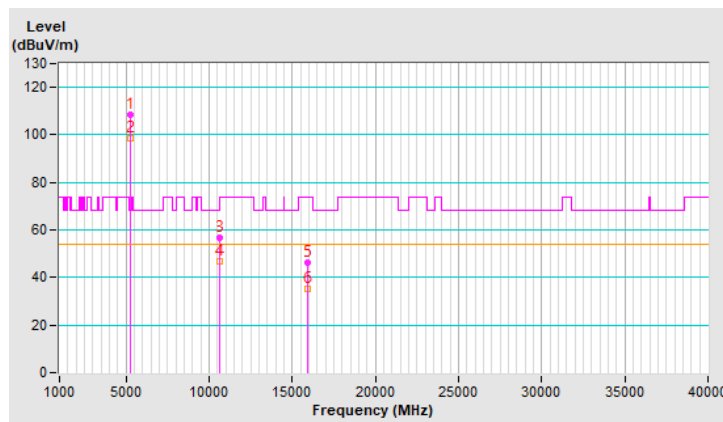


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.3 PK			3.12 H	156	114.4	0.9
2	*5320.00	106.6 AV			3.12 H	156	105.7	0.9
3	5350.00	72.1 PK	74.0	-1.9	3.12 H	156	71.1	1.0
4	5350.00	42.9 AV	54.0	-11.1	3.12 H	156	41.9	1.0
5	10640.00	55.9 PK	74.0	-18.1	1.63 H	218	44.6	11.3
6	10640.00	45.4 AV	54.0	-8.6	1.63 H	218	34.1	11.3
7	15960.00	51.3 PK	74.0	-22.7	1.98 H	100	40.6	10.7
8	15960.00	36.5 AV	54.0	-17.5	1.98 H	100	25.8	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

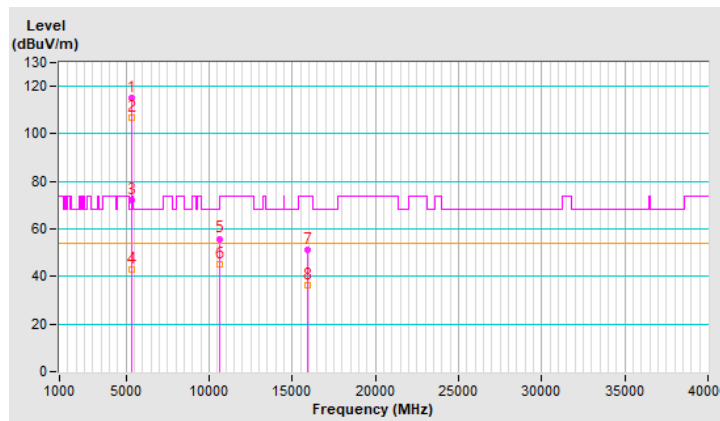


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	108.4 PK			3.45 V	154	107.5	0.9
2	*5320.00	98.4 AV			3.45 V	154	97.5	0.9
3	5350.00	63.4 PK	74.0	-10.6	3.45 V	154	62.4	1.0
4	5350.00	42.0 AV	54.0	-12.0	3.45 V	154	41.0	1.0
5	10640.00	51.6 PK	74.0	-22.4	3.33 V	89	40.3	11.3
6	10640.00	41.4 AV	54.0	-12.6	3.33 V	89	30.1	11.3
7	15960.00	50.2 PK	74.0	-23.8	3.41 V	82	39.5	10.7
8	15960.00	35.5 AV	54.0	-18.5	3.41 V	82	24.8	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

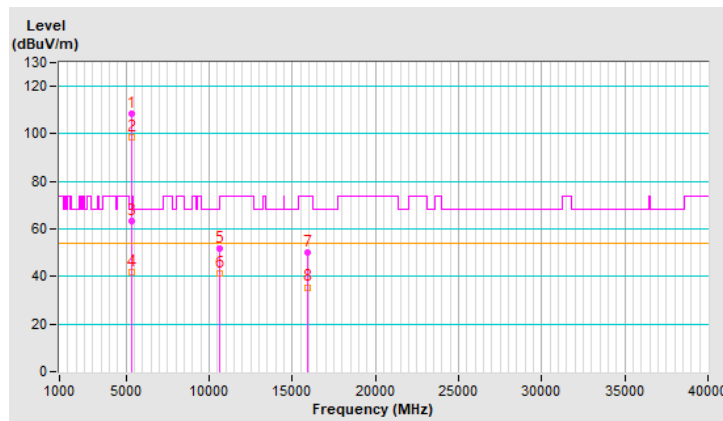


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.2 PK	74.0	-17.8	3.11 H	164	55.2	1.0
2	5460.00	42.1 AV	54.0	-11.9	3.11 H	164	41.1	1.0
3	#5470.00	66.0 PK	68.2	-2.2	3.11 H	164	65.0	1.0
4	*5500.00	116.5 PK			3.11 H	164	115.5	1.0
5	*5500.00	107.0 AV			3.11 H	164	106.0	1.0
6	11000.00	56.4 PK	74.0	-17.6	1.43 H	204	44.5	11.9
7	11000.00	43.3 AV	54.0	-10.7	1.43 H	204	31.4	11.9
8	#16500.00	54.5 PK	68.2	-13.7	3.07 H	110	41.6	12.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

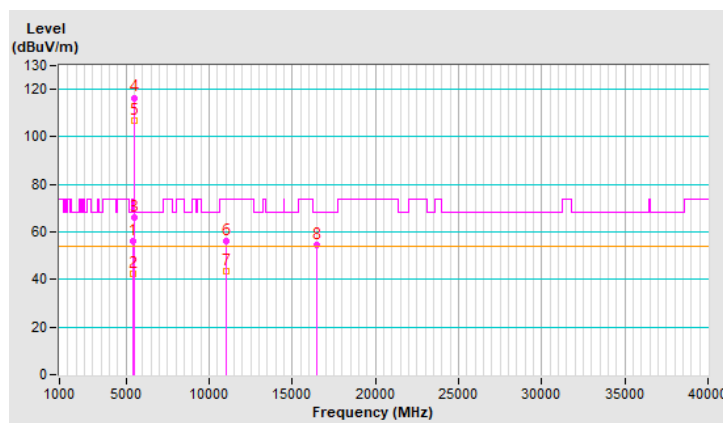


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.4 PK	74.0	-17.6	3.44 V	164	55.4	1.0
2	5460.00	38.9 AV	54.0	-15.1	3.44 V	164	37.9	1.0
3	#5470.00	65.4 PK	68.2	-2.8	3.44 V	164	64.4	1.0
4	*5500.00	111.3 PK			3.44 V	164	110.3	1.0
5	*5500.00	101.4 AV			3.44 V	164	100.4	1.0
6	11000.00	52.4 PK	74.0	-21.6	3.33 V	84	40.5	11.9
7	11000.00	39.6 AV	54.0	-14.4	3.33 V	84	27.7	11.9
8	#16500.00	53.6 PK	68.2	-14.6	3.41 V	89	40.7	12.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

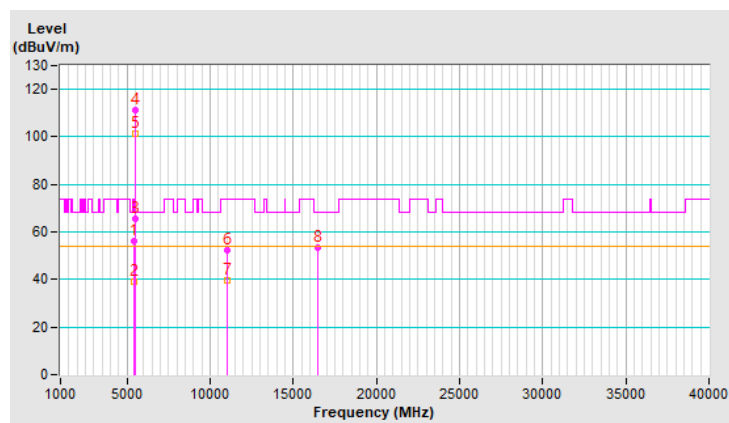


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	119.6 PK			3.15 H	164	118.5	1.1
2	*5580.00	109.5 AV			3.15 H	164	108.4	1.1
3	11160.00	59.6 PK	74.0	-14.4	1.47 H	215	48.2	11.4
4	11160.00	46.4 AV	54.0	-7.6	1.47 H	215	35.0	11.4
5	#16740.00	57.4 PK	68.2	-10.8	3.14 H	110	43.5	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

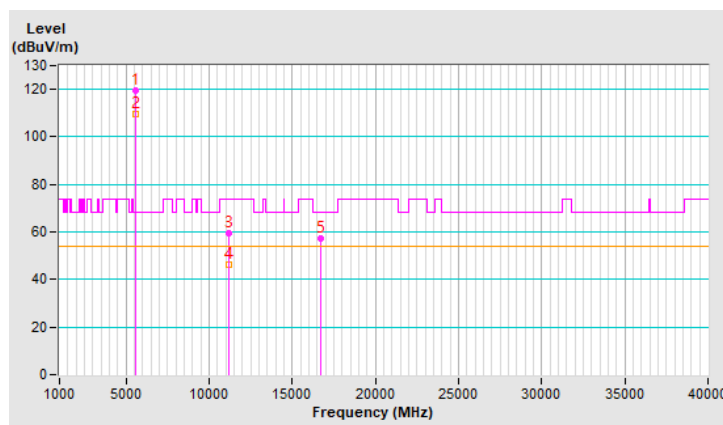


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	107.2 PK			3.25 V	141	106.1	1.1
2	*5580.00	97.5 AV			3.25 V	141	96.4	1.1
3	11160.00	55.4 PK	74.0	-18.6	3.22 V	87	44.0	11.4
4	11160.00	42.4 AV	54.0	-11.6	3.22 V	87	31.0	11.4
5	#16740.00	53.4 PK	68.2	-14.8	3.28 V	90	39.5	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

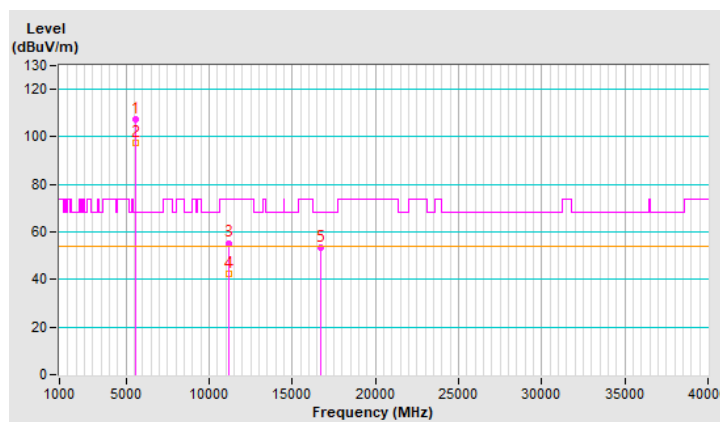


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.4 PK			3.11 H	154	117.0	1.4
2	*5700.00	108.5 AV			3.11 H	154	107.1	1.4
3	#5725.00	66.0 PK	68.2	-2.2	3.11 H	154	64.5	1.5
4	11400.00	58.5 PK	74.0	-15.5	1.47 H	222	46.6	11.9
5	11400.00	45.6 AV	54.0	-8.4	1.47 H	222	33.7	11.9
6	#17100.00	56.2 PK	68.2	-12.0	3.25 H	145	41.3	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

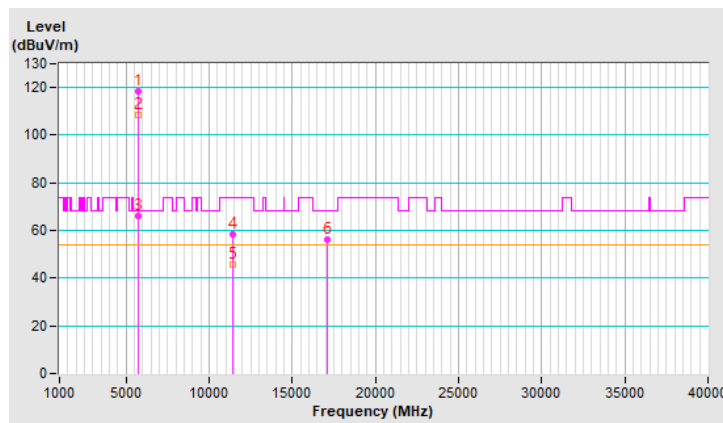


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	106.3 PK			3.36 V	152	104.9	1.4
2	*5700.00	96.5 AV			3.36 V	152	95.1	1.4
3	#5725.00	61.4 PK	68.2	-6.8	3.36 V	152	59.9	1.5
4	11400.00	54.4 PK	74.0	-19.6	3.52 V	96	42.5	11.9
5	11400.00	41.5 AV	54.0	-12.5	3.52 V	96	29.6	11.9
6	#17100.00	52.4 PK	68.2	-15.8	3.41 V	89	37.5	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

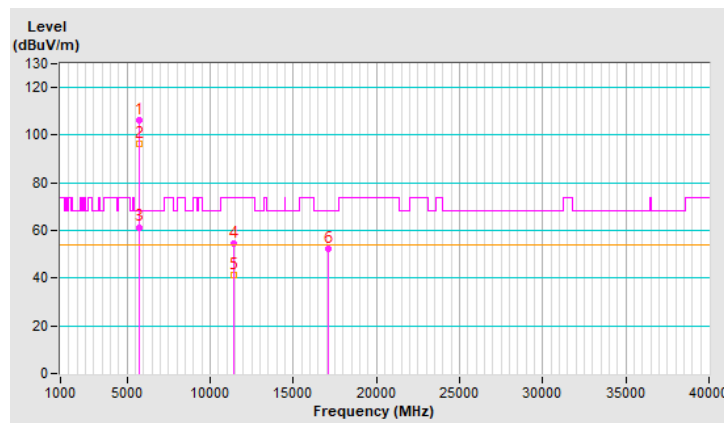


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.5 PK	74.0	-24.5	3.11 H	145	48.5	1.0
2	5460.00	39.4 AV	54.0	-14.6	3.11 H	145	38.4	1.0
3	#5470.00	50.4 PK	68.2	-17.8	3.11 H	145	49.4	1.0
4	*5720.00	118.4 PK			3.11 H	145	116.9	1.5
5	*5720.00	108.6 AV			3.11 H	145	107.1	1.5
6	#5850.00	50.3 PK	68.2	-17.9	3.11 H	145	48.5	1.8
7	11440.00	55.3 PK	74.0	-18.7	2.25 H	164	43.4	11.9
8	11440.00	41.5 AV	54.0	-12.5	2.25 H	164	29.6	11.9
9	#17160.00	53.2 PK	68.2	-15.0	2.52 H	141	38.2	15.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

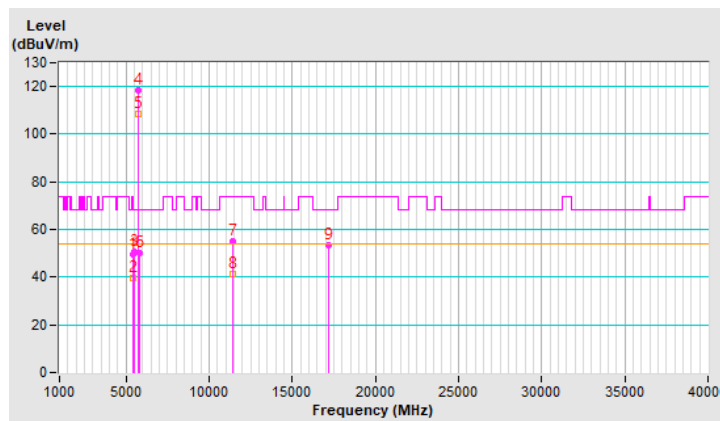


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.4 PK	74.0	-23.6	3.28 V	141	49.4	1.0
2	5460.00	38.2 AV	54.0	-15.8	3.28 V	141	37.2	1.0
3	#5470.00	50.5 PK	68.2	-17.7	3.28 V	141	49.5	1.0
4	*5720.00	106.4 PK			3.28 V	141	104.9	1.5
5	*5720.00	96.6 AV			3.28 V	141	95.1	1.5
6	#5850.00	50.4 PK	68.2	-17.8	3.28 V	141	48.6	1.8
7	11440.00	51.4 PK	74.0	-22.6	3.14 V	89	39.5	11.9
8	11440.00	37.6 AV	54.0	-16.4	3.14 V	89	25.7	11.9
9	#17160.00	49.6 PK	68.2	-18.6	3.41 V	98	34.6	15.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

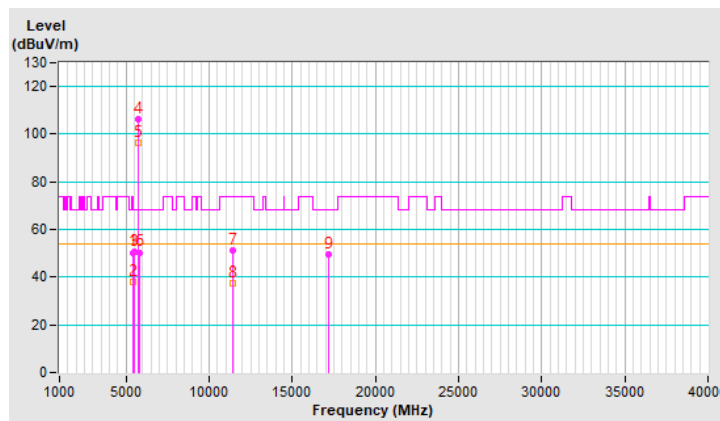


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.27	54.2 PK	68.2	-14.0	3.21 H	166	53.0	1.2
2	*5745.00	116.5 PK			3.21 H	166	115.0	1.5
3	*5745.00	106.4 AV			3.21 H	166	104.9	1.5
4	#6000.69	50.5 PK	68.2	-17.7	3.21 H	166	48.4	2.1
5	11490.00	57.6 PK	74.0	-16.4	2.62 H	152	45.7	11.9
6	11490.00	47.2 AV	54.0	-6.8	2.62 H	152	35.3	11.9
7	#17235.00	55.9 PK	68.2	-12.3	1.48 H	176	40.7	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

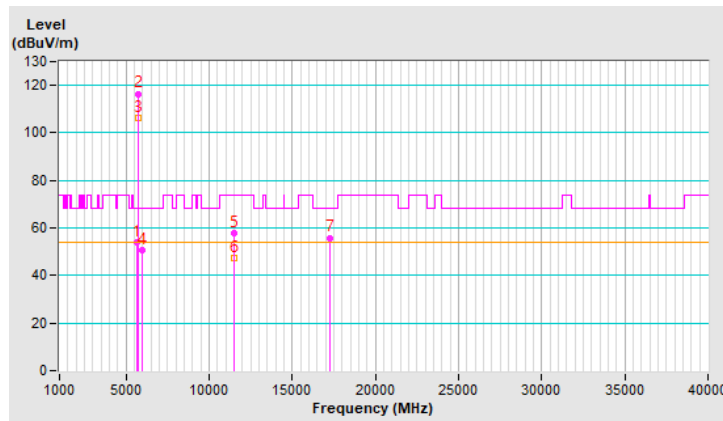


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5597.10	51.3 PK	68.2	-16.9	3.54 V	144	50.2	1.1
2	*5745.00	108.3 PK			3.54 V	144	106.8	1.5
3	*5745.00	98.3 AV			3.54 V	144	96.8	1.5
4	#5960.99	51.5 PK	68.2	-16.7	3.54 V	144	49.4	2.1
5	11490.00	53.4 PK	74.0	-20.6	3.41 V	99	41.5	11.9
6	11490.00	43.5 AV	54.0	-10.5	3.41 V	99	31.6	11.9
7	#17235.00	54.7 PK	68.2	-13.5	3.31 V	97	39.5	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

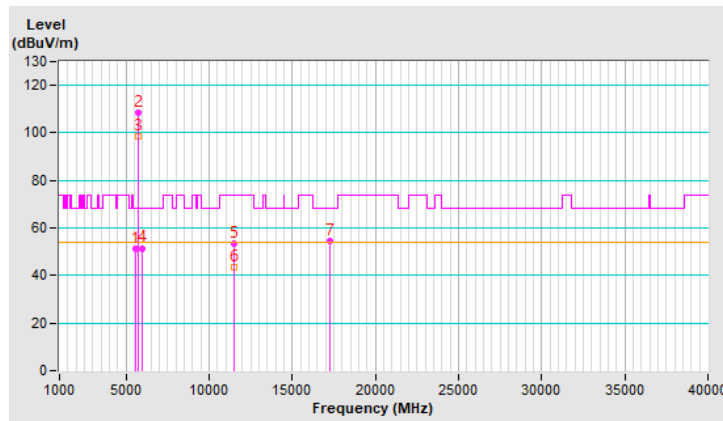


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5604.38	50.4 PK	68.2	-17.8	3.15 H	164	49.2	1.2
2	*5785.00	117.1 PK			3.15 H	164	115.5	1.6
3	*5785.00	107.4 AV			3.15 H	164	105.8	1.6
4	#5976.78	50.2 PK	68.2	-18.0	3.15 H	164	48.1	2.1
5	11570.00	57.8 PK	74.0	-16.2	2.54 H	155	45.9	11.9
6	11570.00	46.3 AV	54.0	-7.7	2.54 H	155	34.4	11.9
7	#17355.00	57.5 PK	68.2	-10.7	3.31 H	152	41.4	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

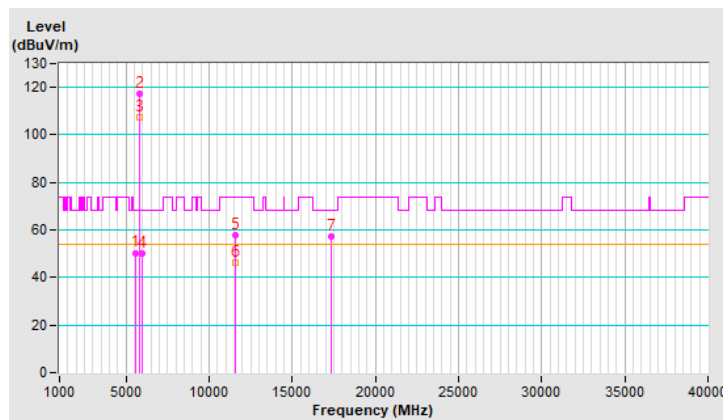


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5615.32	51.4 PK	68.2	-16.8	3.44 V	152	50.2	1.2
2	*5785.00	109.2 PK			3.44 V	152	107.6	1.6
3	*5785.00	99.6 AV			3.44 V	152	98.0	1.6
4	#5943.18	51.3 PK	68.2	-16.9	3.44 V	152	49.2	2.1
5	11570.00	53.4 PK	74.0	-20.6	3.11 V	79	41.5	11.9
6	11570.00	43.6 AV	54.0	-10.4	3.11 V	79	31.7	11.9
7	#17355.00	53.4 PK	68.2	-14.8	3.25 V	89	37.3	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

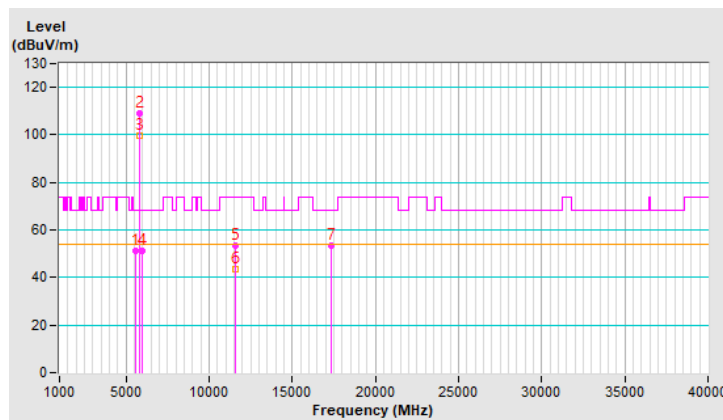


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5633.85	51.2 PK	68.2	-17.0	3.22 H	168	50.0	1.2
2	*5825.00	115.9 PK			3.22 H	168	114.1	1.8
3	*5825.00	105.5 AV			3.22 H	168	103.7	1.8
4	#6003.01	51.2 PK	68.2	-17.0	3.22 H	168	49.1	2.1
5	11650.00	57.5 PK	74.0	-16.5	2.50 H	190	45.8	11.7
6	11650.00	47.0 AV	54.0	-7.0	2.50 H	190	35.3	11.7
7	#17475.00	60.8 PK	68.2	-7.4	3.75 H	172	43.5	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

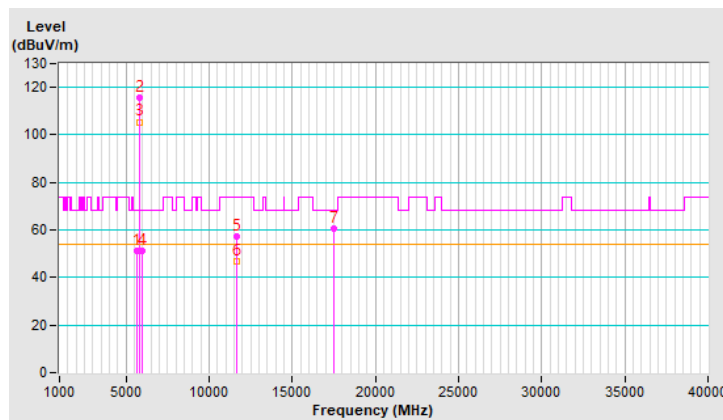


RF Mode	20 MHz Preamble 802.11ax (RU52)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5625.57	51.3 PK	68.2	-16.9	3.52 V	164	50.1	1.2
2	*5825.00	108.4 PK			3.52 V	164	106.6	1.8
3	*5825.00	98.6 AV			3.52 V	164	96.8	1.8
4	#5963.87	51.1 PK	68.2	-17.1	3.52 V	164	49.0	2.1
5	11650.00	53.4 PK	74.0	-20.6	3.44 V	99	41.7	11.7
6	11650.00	43.3 AV	54.0	-10.7	3.44 V	99	31.6	11.7
7	#17475.00	59.5 PK	68.2	-8.7	3.14 V	78	42.2	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

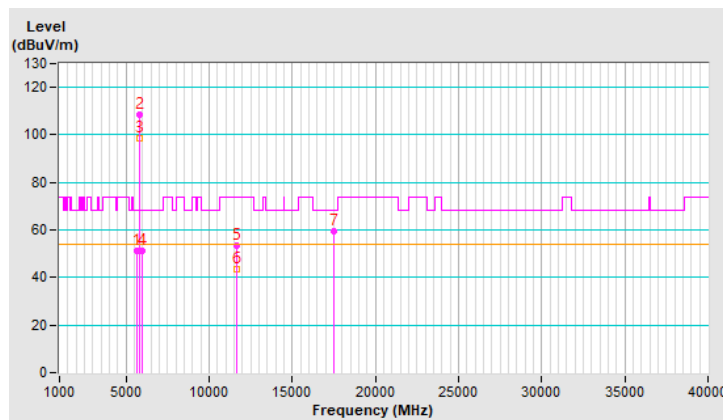


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.3 PK	74.0	-1.7	3.11 H	168	71.2	1.1
2	5150.00	49.9 AV	54.0	-4.1	3.11 H	168	48.8	1.1
3	*5180.00	116.4 PK			3.11 H	168	115.4	1.0
4	*5180.00	106.2 AV			3.11 H	168	105.2	1.0
5	#10360.00	56.4 PK	68.2	-11.8	1.54 H	258	45.2	11.2
6	15540.00	44.6 PK	74.0	-29.4	3.07 H	172	33.7	10.9
7	15540.00	33.6 AV	54.0	-20.4	3.07 H	172	22.7	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

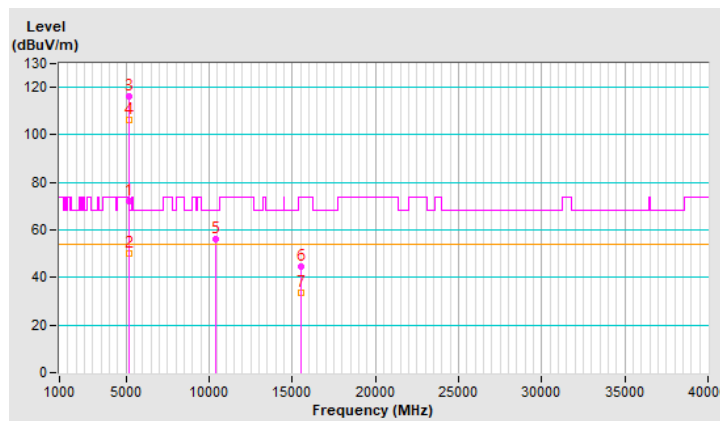


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.7 PK	74.0	-14.3	3.52 V	154	58.6	1.1
2	5150.00	43.1 AV	54.0	-10.9	3.52 V	154	42.0	1.1
3	*5180.00	108.3 PK			3.52 V	154	107.3	1.0
4	*5180.00	98.6 AV			3.52 V	154	97.6	1.0
5	#10360.00	52.3 PK	68.2	-15.9	3.11 V	100	41.1	11.2
6	15540.00	43.6 PK	74.0	-30.4	3.25 V	98	32.7	10.9
7	15540.00	32.5 AV	54.0	-21.5	3.25 V	98	21.6	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

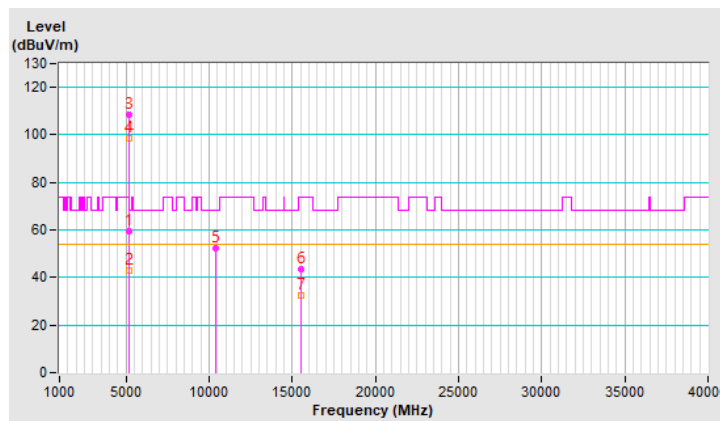


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	118.6 PK			3.15 H	154	117.7	0.9
2	*5200.00	108.5 AV			3.15 H	154	107.6	0.9
3	#10400.00	58.3 PK	68.2	-9.9	1.55 H	241	46.9	11.4
4	15600.00	46.2 PK	74.0	-27.8	3.01 H	171	35.5	10.7
5	15600.00	35.5 AV	54.0	-18.5	3.01 H	171	24.8	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

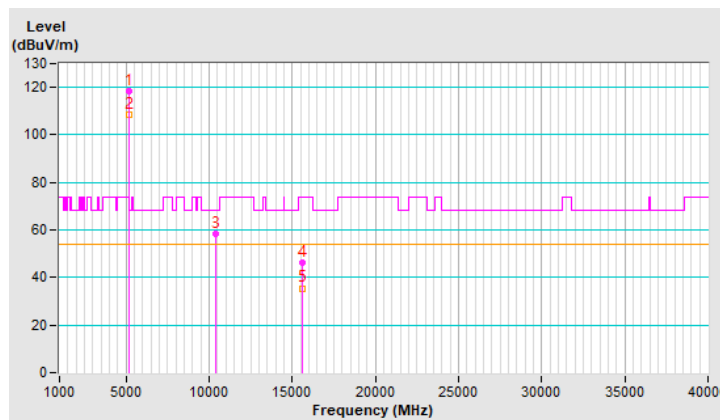


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	106.6 PK			3.44 V	163	105.7	0.9
2	*5200.00	96.6 AV			3.44 V	163	95.7	0.9
3	#10400.00	54.4 PK	68.2	-13.8	3.48 V	89	43.0	11.4
4	15600.00	42.4 PK	74.0	-31.6	3.33 V	100	31.7	10.7
5	15600.00	31.5 AV	54.0	-22.5	3.33 V	100	20.8	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

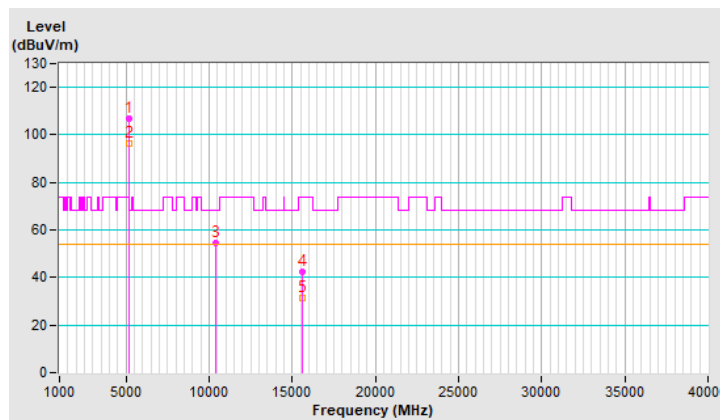


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	119.2 PK			3.11 H	154	118.3	0.9
2	*5240.00	109.5 AV			3.11 H	154	108.6	0.9
3	5350.00	50.3 PK	74.0	-23.7	3.11 H	154	49.3	1.0
4	5350.00	38.5 AV	54.0	-15.5	3.11 H	154	37.5	1.0
5	#10480.00	59.6 PK	68.2	-8.6	1.54 H	241	48.2	11.4
6	15720.00	47.5 PK	74.0	-26.5	3.11 H	171	36.9	10.6
7	15720.00	36.4 AV	54.0	-17.6	3.11 H	171	25.8	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

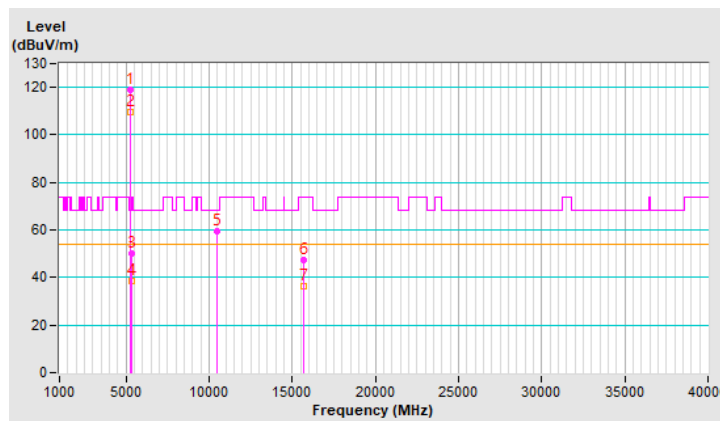


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	107.4 PK			3.52 V	166	106.5	0.9
2	*5240.00	97.6 AV			3.52 V	166	96.7	0.9
3	5350.00	50.3 PK	74.0	-23.7	3.52 V	166	49.3	1.0
4	5350.00	38.4 AV	54.0	-15.6	3.52 V	166	37.4	1.0
5	#10480.00	55.4 PK	68.2	-12.8	3.41 V	89	44.0	11.4
6	15720.00	43.4 PK	74.0	-30.6	3.52 V	99	32.8	10.6
7	15720.00	32.5 AV	54.0	-21.5	3.52 V	99	21.9	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

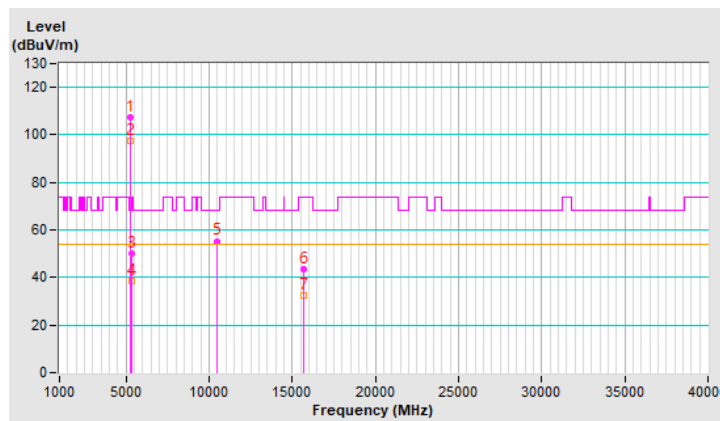


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.3 PK	74.0	-23.7	3.14 H	145	49.2	1.1
2	5150.00	38.4 AV	54.0	-15.6	3.14 H	145	37.3	1.1
3	*5260.00	118.3 PK			3.14 H	145	117.5	0.8
4	*5260.00	108.4 AV			3.14 H	145	107.6	0.8
5	#10520.00	59.1 PK	68.2	-9.1	1.55 H	210	47.7	11.4
6	15780.00	47.4 PK	74.0	-26.6	3.15 H	171	36.9	10.5
7	15780.00	36.4 AV	54.0	-17.6	3.15 H	171	25.9	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

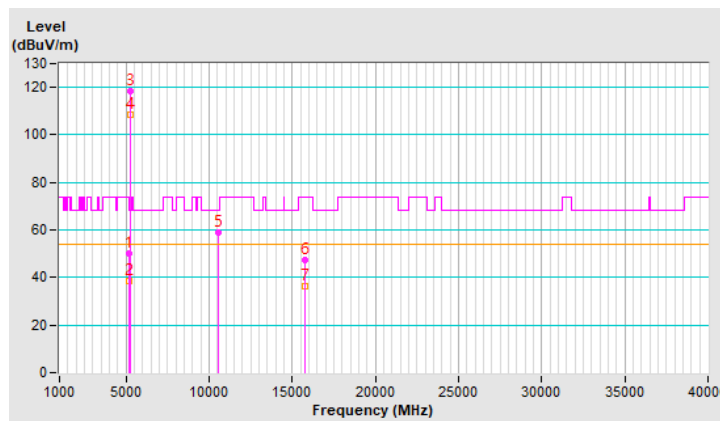


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	5150.00	50.6 PK	74.0	-23.4	3.41 V	158	49.5	1.1
2	5150.00	38.5 AV	54.0	-15.5	3.41 V	158	37.4	1.1
3	*5260.00	107.4 PK			3.41 V	158	106.6	0.8
4	*5260.00	97.5 AV			3.41 V	158	96.7	0.8
5	#10520.00	55.4 PK	68.2	-12.8	3.54 V	89	44.0	11.4
6	15780.00	43.3 PK	74.0	-30.7	3.55 V	87	32.8	10.5
7	15780.00	32.2 AV	54.0	-21.8	3.55 V	87	21.7	10.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

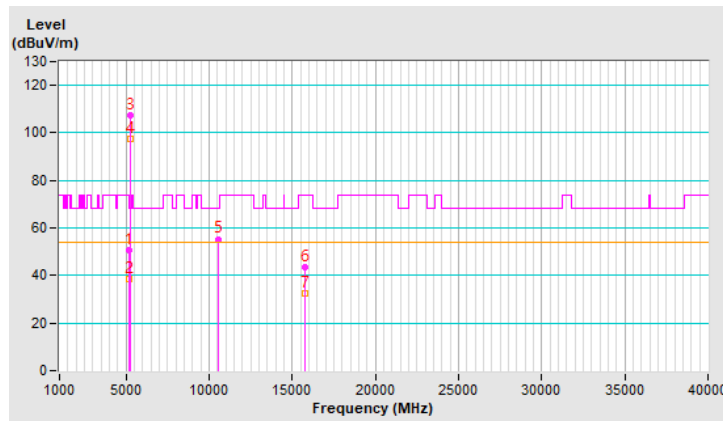


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5300.00	118.8 PK			3.11 H	154	118.0	0.8
2	*5300.00	109.4 AV			3.11 H	154	108.6	0.8
3	10600.00	60.4 PK	74.0	-13.6	1.64 H	214	49.1	11.3
4	10600.00	50.4 AV	54.0	-3.6	1.64 H	214	39.1	11.3
5	15900.00	48.3 PK	74.0	-25.7	3.14 H	172	38.0	10.3
6	15900.00	37.5 AV	54.0	-16.5	3.14 H	172	27.2	10.3

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

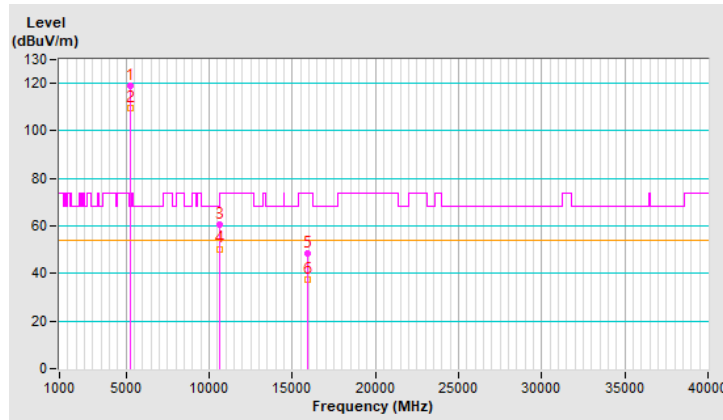


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	106.2 PK			3.56 V	145	105.4	0.8
2	*5300.00	96.7 AV			3.56 V	145	95.9	0.8
3	10600.00	56.6 PK	74.0	-17.4	3.58 V	97	45.3	11.3
4	10600.00	46.6 AV	54.0	-7.4	3.58 V	97	35.3	11.3
5	15900.00	44.6 PK	74.0	-29.4	3.44 V	96	34.3	10.3
6	15900.00	33.6 AV	54.0	-20.4	3.44 V	96	23.3	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

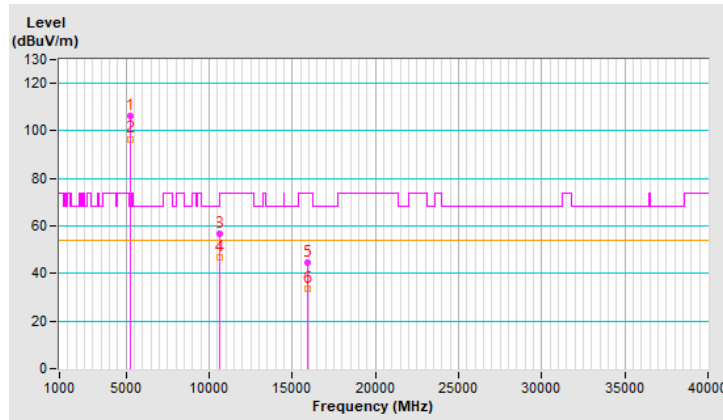


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.6 PK			3.11 H	158	114.7	0.9
2	*5320.00	104.3 AV			3.11 H	158	103.4	0.9
3	5350.00	72.4 PK	74.0	-1.6	3.11 H	158	71.4	1.0
4	5350.00	47.2 AV	54.0	-6.8	3.11 H	158	46.2	1.0
5	10640.00	52.4 PK	74.0	-21.6	1.48 H	218	41.1	11.3
6	10640.00	42.1 AV	54.0	-11.9	1.48 H	218	30.8	11.3
7	15960.00	43.4 PK	74.0	-30.6	3.07 H	172	32.7	10.7
8	15960.00	34.3 AV	54.0	-19.7	3.07 H	172	23.6	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

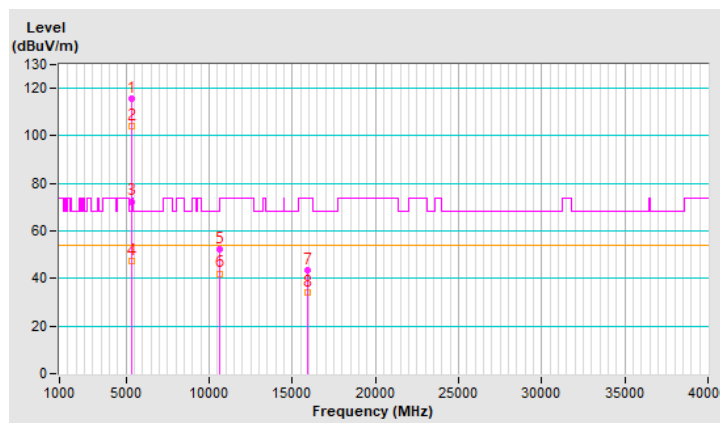


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	107.4 PK			3.46 V	137	106.5	0.9
2	*5320.00	97.5 AV			3.46 V	137	96.6	0.9
3	5350.00	58.5 PK	74.0	-15.5	3.46 V	137	57.5	1.0
4	5350.00	38.5 AV	54.0	-15.5	3.46 V	137	37.5	1.0
5	10640.00	48.4 PK	74.0	-25.6	3.25 V	82	37.1	11.3
6	10640.00	38.5 AV	54.0	-15.5	3.25 V	82	27.2	11.3
7	15960.00	42.3 PK	74.0	-31.7	3.52 V	91	31.6	10.7
8	15960.00	33.5 AV	54.0	-20.5	3.52 V	91	22.8	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

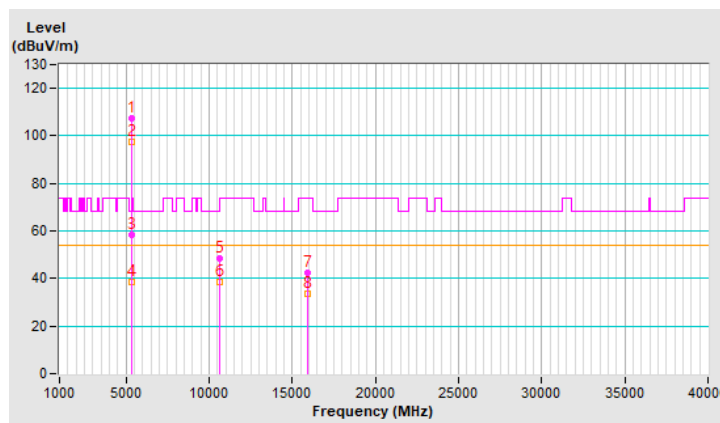


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.3 PK	74.0	-13.7	3.18 H	160	59.3	1.0
2	5460.00	41.0 AV	54.0	-13.0	3.18 H	160	40.0	1.0
3	#5470.00	65.9 PK	68.2	-2.3	3.18 H	160	64.9	1.0
4	*5500.00	114.3 PK			3.18 H	160	113.3	1.0
5	*5500.00	104.4 AV			3.18 H	160	103.4	1.0
6	11000.00	53.4 PK	74.0	-20.6	1.45 H	264	41.5	11.9
7	11000.00	42.5 AV	54.0	-11.5	1.45 H	264	30.6	11.9
8	#16500.00	53.3 PK	68.2	-14.9	1.44 H	244	40.4	12.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

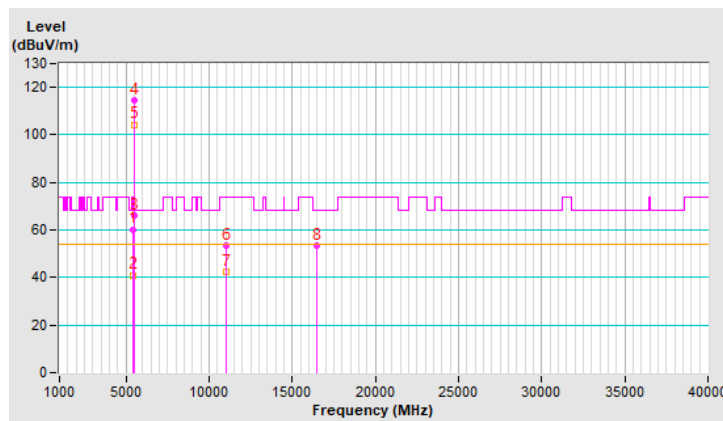


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 77% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.3 PK	74.0	-15.7	3.41 V	149	57.3	1.0
2	5460.00	38.5 AV	54.0	-15.5	3.41 V	149	37.5	1.0
3	#5470.00	60.3 PK	68.2	-7.9	3.41 V	149	59.3	1.0
4	*5500.00	106.9 PK			3.41 V	149	105.9	1.0
5	*5500.00	97.1 AV			3.41 V	149	96.1	1.0
6	11000.00	49.4 PK	74.0	-24.6	3.11 V	88	37.5	11.9
7	11000.00	38.5 AV	54.0	-15.5	3.11 V	88	26.6	11.9
8	#16500.00	52.4 PK	68.2	-15.8	3.26 V	79	39.5	12.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

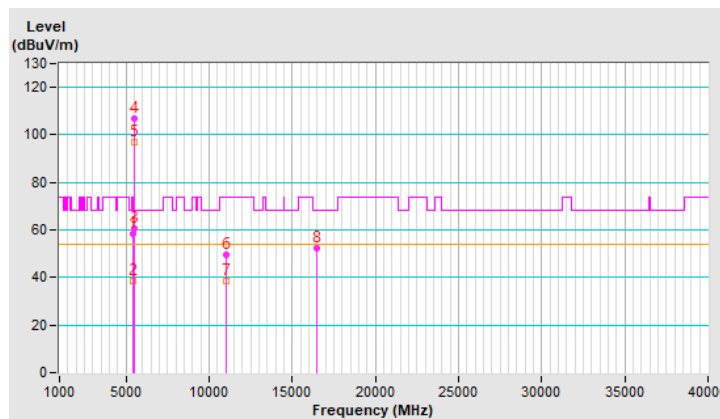


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	115.4 PK			3.12 H	160	114.3	1.1
2	*5580.00	105.6 AV			3.12 H	160	104.5	1.1
3	11160.00	54.4 PK	74.0	-19.6	1.44 H	241	43.0	11.4
4	11160.00	43.5 AV	54.0	-10.5	1.44 H	241	32.1	11.4
5	#16740.00	53.2 PK	68.2	-15.0	1.41 H	248	39.3	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

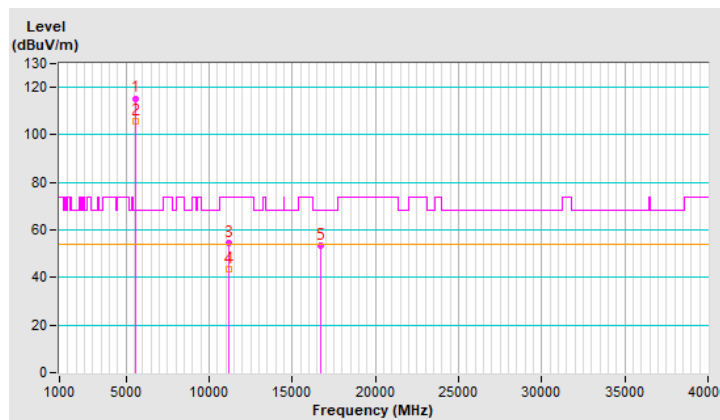


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5580.00	103.4 PK			3.52 V	166	102.3	1.1
2	*5580.00	93.6 AV			3.52 V	166	92.5	1.1
3	11160.00	50.4 PK	74.0	-23.6	3.44 V	89	39.0	11.4
4	11160.00	39.6 AV	54.0	-14.4	3.44 V	89	28.2	11.4
5	#16740.00	49.6 PK	68.2	-18.6	3.44 V	99	35.7	13.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

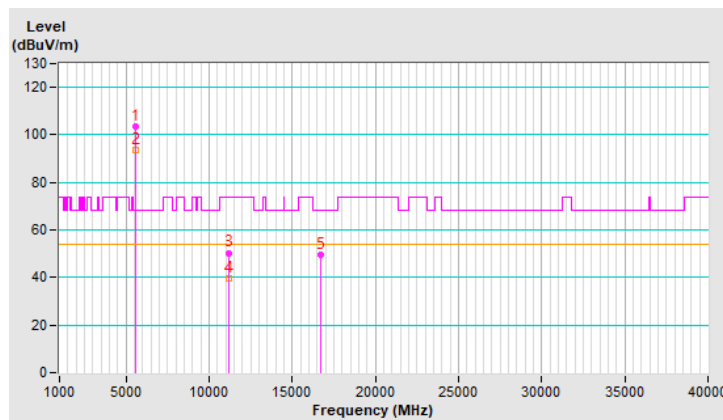


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	119.4 PK			3.11 H	154	118.0	1.4
2	*5700.00	109.5 AV			3.11 H	154	108.1	1.4
3	#5725.00	66.3 PK	68.2	-1.9	3.11 H	154	64.8	1.5
4	11400.00	58.5 PK	74.0	-15.5	1.47 H	222	46.6	11.9
5	11400.00	45.4 AV	54.0	-8.6	1.47 H	222	33.5	11.9
6	#17100.00	56.4 PK	68.2	-11.8	3.25 H	145	41.5	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

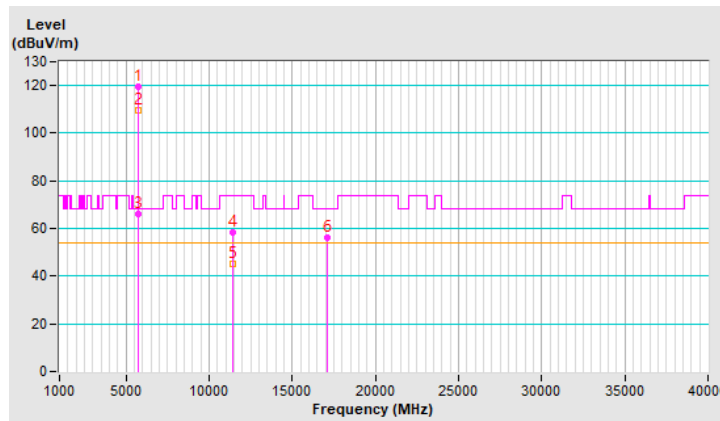


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	107.6 PK			3.42 V	152	106.2	1.4
2	*5700.00	97.5 AV			3.42 V	152	96.1	1.4
3	#5725.00	62.4 PK	68.2	-5.8	3.42 V	152	60.9	1.5
4	11400.00	54.4 PK	74.0	-19.6	3.52 V	87	42.5	11.9
5	11400.00	41.6 AV	54.0	-12.4	3.52 V	87	29.7	11.9
6	#17100.00	52.3 PK	68.2	-15.9	3.44 V	93	37.4	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

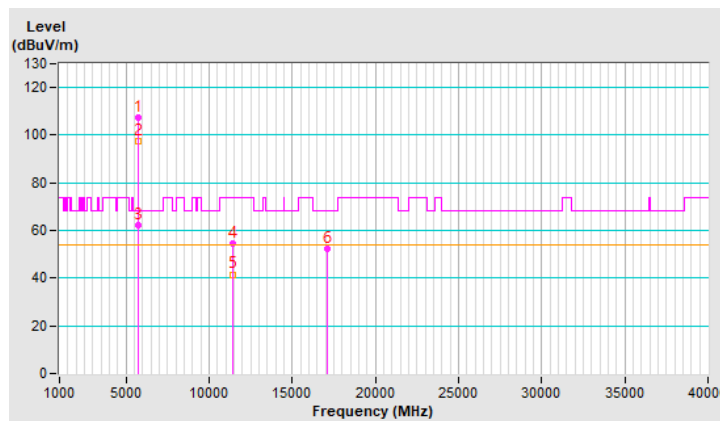


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.4 PK	74.0	-23.6	3.11 H	145	49.4	1.0
2	5460.00	40.4 AV	54.0	-13.6	3.11 H	145	39.4	1.0
3	#5470.00	51.1 PK	68.2	-17.1	3.11 H	145	50.1	1.0
4	*5720.00	119.1 PK			3.11 H	145	117.6	1.5
5	*5720.00	109.1 AV			3.11 H	145	107.6	1.5
6	#5850.00	51.4 PK	68.2	-16.8	3.11 H	145	49.6	1.8
7	11440.00	55.8 PK	74.0	-18.2	2.25 H	164	43.9	11.9
8	11440.00	42.4 AV	54.0	-11.6	2.25 H	164	30.5	11.9
9	#17160.00	53.8 PK	68.2	-14.4	2.52 H	141	38.8	15.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

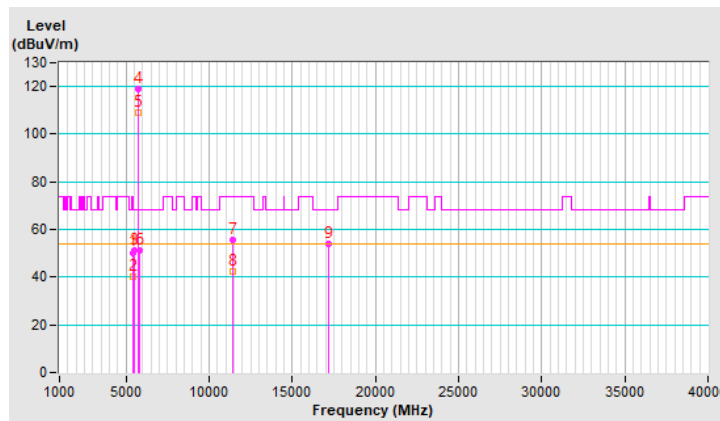


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.3 PK	74.0	-23.7	3.52 V	141	49.3	1.0
2	5460.00	39.5 AV	54.0	-14.5	3.52 V	141	38.5	1.0
3	#5470.00	50.3 PK	68.2	-17.9	3.52 V	141	49.3	1.0
4	*5720.00	107.4 PK			3.52 V	141	105.9	1.5
5	*5720.00	97.5 AV			3.52 V	141	96.0	1.5
6	#5850.00	50.5 PK	68.2	-17.7	3.52 V	141	48.7	1.8
7	11440.00	51.4 PK	74.0	-22.6	3.45 V	87	39.5	11.9
8	11440.00	38.6 AV	54.0	-15.4	3.45 V	87	26.7	11.9
9	#17160.00	49.4 PK	68.2	-18.8	3.41 V	99	34.4	15.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

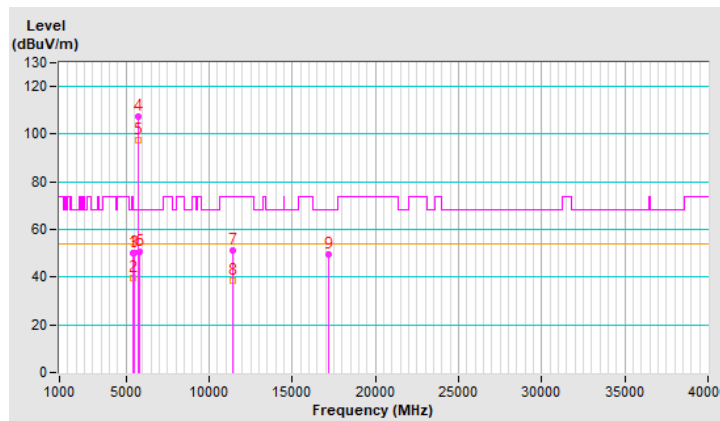


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.52	50.2 PK	68.2	-18.0	3.21 H	166	49.0	1.2
2	*5745.00	113.5 PK			3.21 H	166	112.0	1.5
3	*5745.00	103.5 AV			3.21 H	166	102.0	1.5
4	#5970.87	50.6 PK	68.2	-17.6	3.21 H	166	48.5	2.1
5	11490.00	55.1 PK	74.0	-18.9	1.47 H	261	43.2	11.9
6	11490.00	43.5 AV	54.0	-10.5	1.47 H	261	31.6	11.9
7	#17235.00	52.4 PK	68.2	-15.8	1.44 H	245	37.2	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

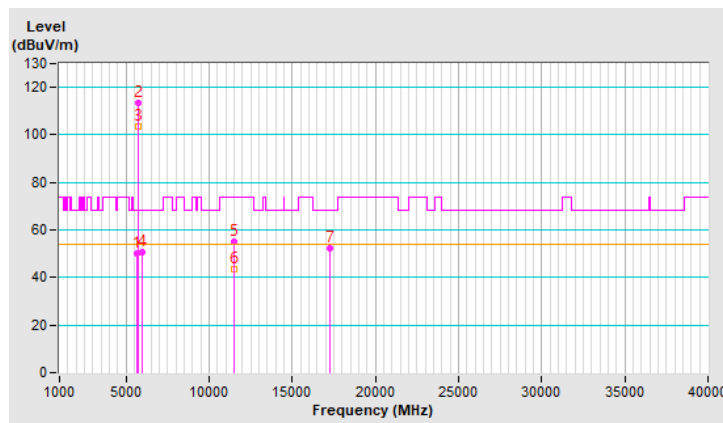


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5621.89	50.5 PK	68.2	-17.7	3.46 V	148	49.3	1.2
2	*5745.00	107.4 PK			3.46 V	148	105.9	1.5
3	*5745.00	97.6 AV			3.46 V	148	96.1	1.5
4	#5931.06	51.0 PK	68.2	-17.2	3.46 V	148	49.0	2.0
5	11490.00	51.4 PK	74.0	-22.6	3.55 V	66	39.5	11.9
6	11490.00	39.6 AV	54.0	-14.4	3.55 V	66	27.7	11.9
7	#17235.00	51.2 PK	68.2	-17.0	3.15 V	71	36.0	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

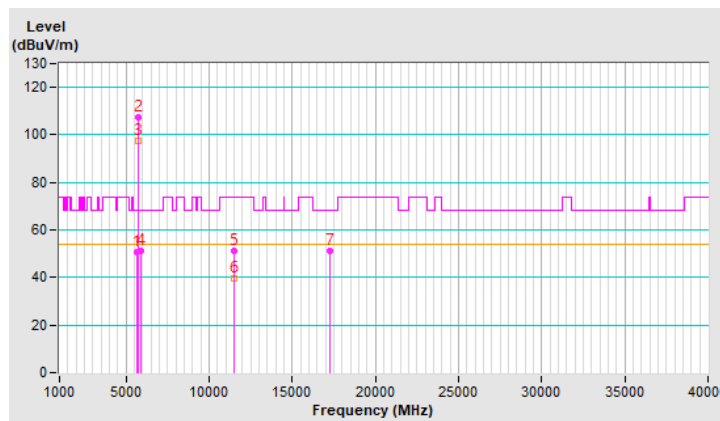


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5605.24	51.8 PK	68.2	-16.4	3.11 H	158	50.6	1.2
2	*5785.00	116.9 PK			3.11 H	158	115.3	1.6
3	*5785.00	106.5 AV			3.11 H	158	104.9	1.6
4	#5990.18	51.5 PK	68.2	-16.7	3.11 H	158	49.4	2.1
5	11570.00	54.1 PK	74.0	-19.9	2.53 H	155	42.2	11.9
6	11570.00	42.8 AV	54.0	-11.2	2.53 H	155	30.9	11.9
7	#17355.00	54.0 PK	68.2	-14.2	3.09 H	179	37.9	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

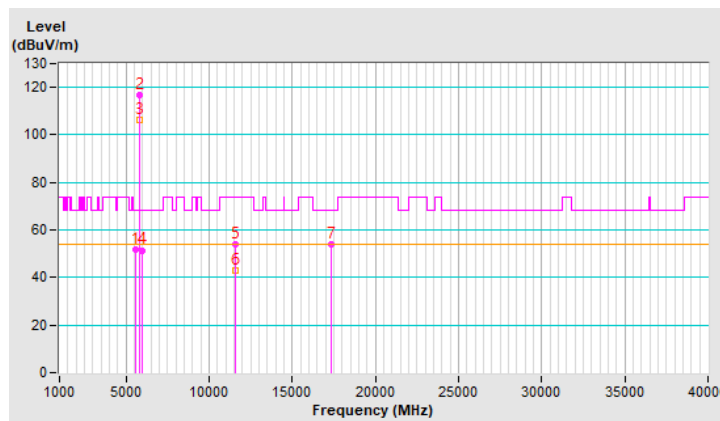


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5587.92	51.2 PK	68.2	-17.0	3.34 V	112	50.1	1.1
2	*5785.00	108.7 PK			3.34 V	112	107.1	1.6
3	*5785.00	98.6 AV			3.34 V	112	97.0	1.6
4	#5982.90	50.6 PK	68.2	-17.6	3.34 V	112	48.5	2.1
5	11570.00	50.3 PK	74.0	-23.7	3.58 V	93	38.4	11.9
6	11570.00	38.3 AV	54.0	-15.7	3.58 V	93	26.4	11.9
7	#17355.00	52.4 PK	68.2	-15.8	3.41 V	82	36.3	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

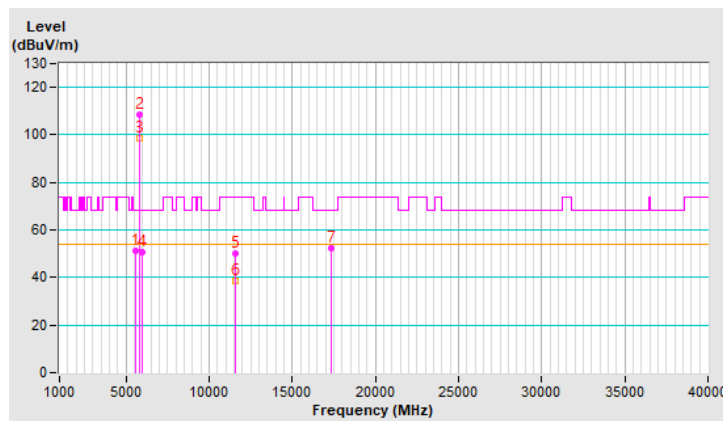


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5597.82	49.8 PK	68.2	-18.4	3.15 H	164	48.7	1.1
2	*5825.00	112.2 PK			3.15 H	164	110.4	1.8
3	*5825.00	102.6 AV			3.15 H	164	100.8	1.8
4	#5991.77	50.2 PK	68.2	-18.0	3.15 H	164	48.1	2.1
5	11650.00	55.6 PK	74.0	-18.4	1.72 H	254	43.9	11.7
6	11650.00	44.4 AV	54.0	-9.6	1.72 H	254	32.7	11.7
7	#17475.00	55.4 PK	68.2	-12.8	3.25 H	212	38.1	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

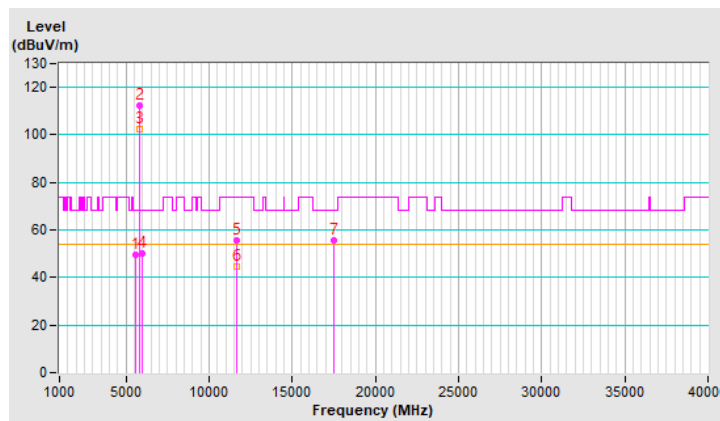


RF Mode	20 MHz Preamble 802.11ax (RU106)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 80% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5573.33	50.1 PK	68.2	-18.1	3.46 V	86	49.0	1.1
2	*5825.00	111.0 PK			3.46 V	86	109.2	1.8
3	*5825.00	100.5 AV			3.46 V	86	98.7	1.8
4	#5971.52	48.5 PK	68.2	-19.7	3.46 V	86	46.4	2.1
5	11650.00	51.4 PK	74.0	-22.6	3.41 V	90	39.7	11.7
6	11650.00	40.2 AV	54.0	-13.8	3.41 V	90	28.5	11.7
7	#17475.00	53.4 PK	68.2	-14.8	3.33 V	82	36.1	17.3


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

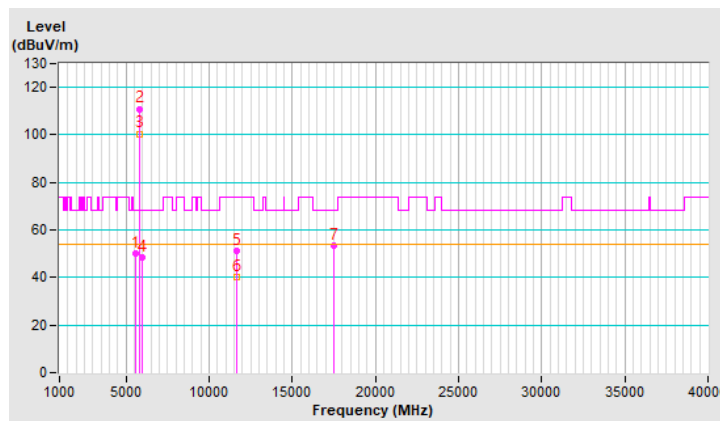


Plot of Band Edge Mode A


802.11a Channel 36

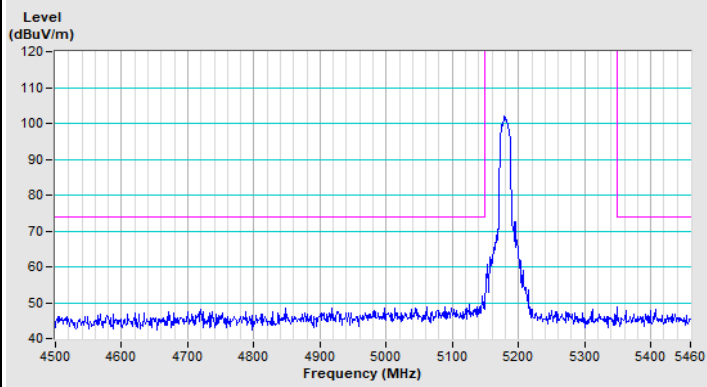


Horizontal (Peak)

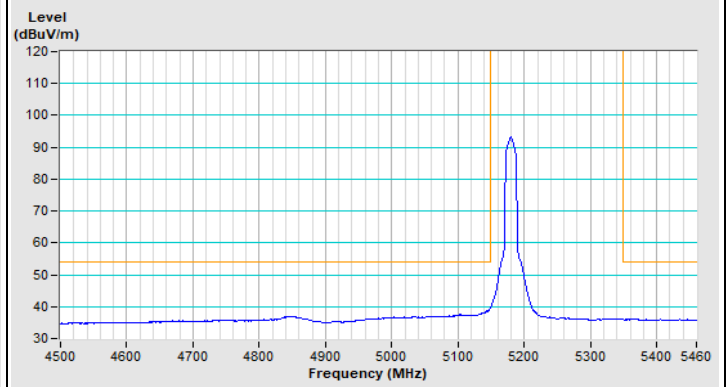

Horizontal (Average)

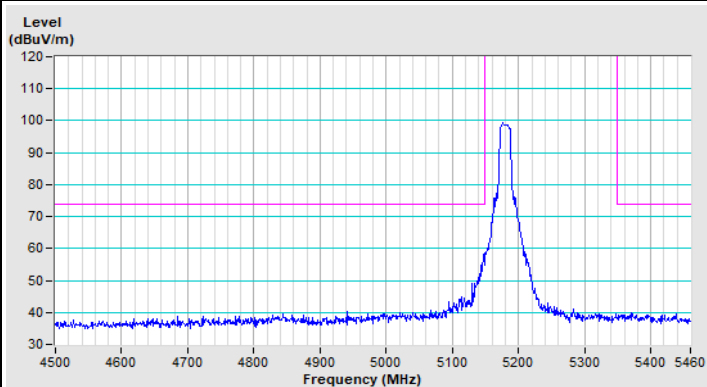


Vertical (Peak)

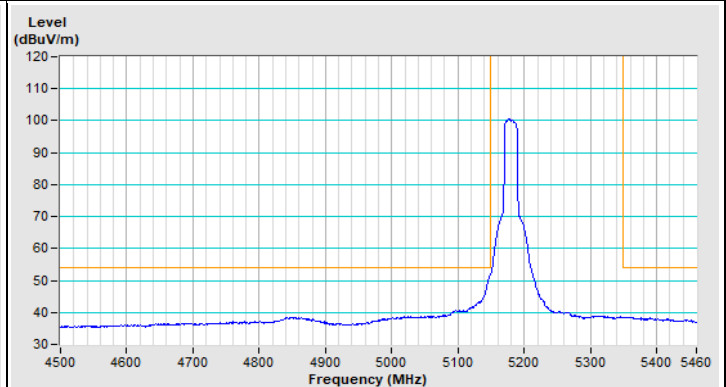


Vertical (Average)


802.11a Channel 64

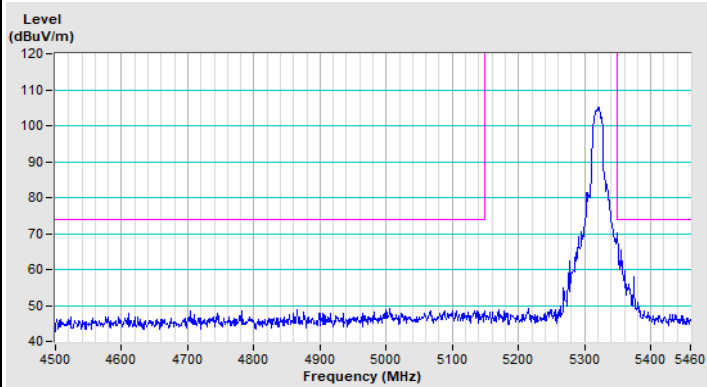


Horizontal (Peak)

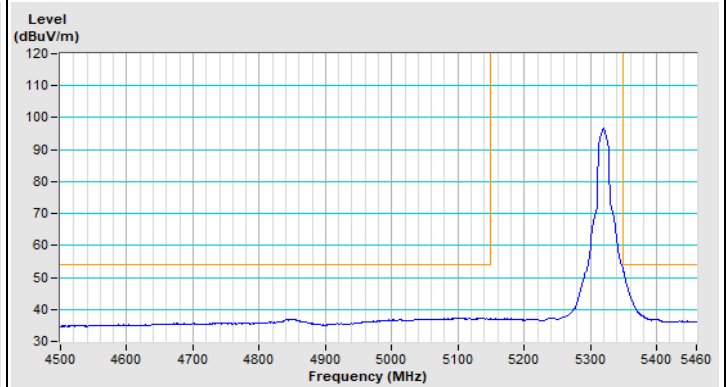

Horizontal (Average)

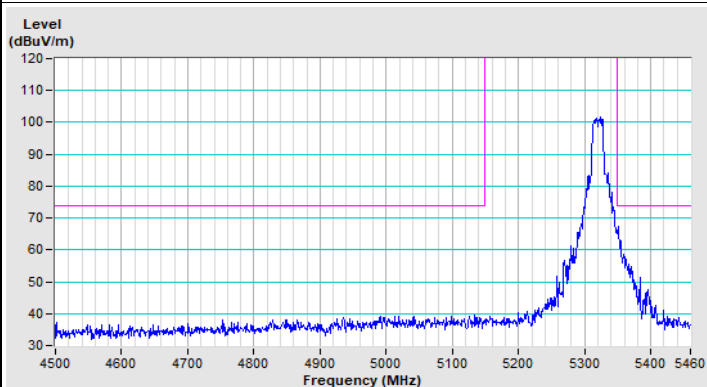


Vertical (Peak)

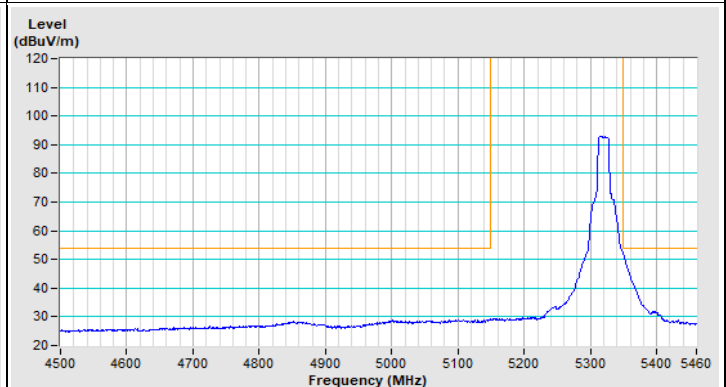


Vertical (Average)


802.11a Channel 100

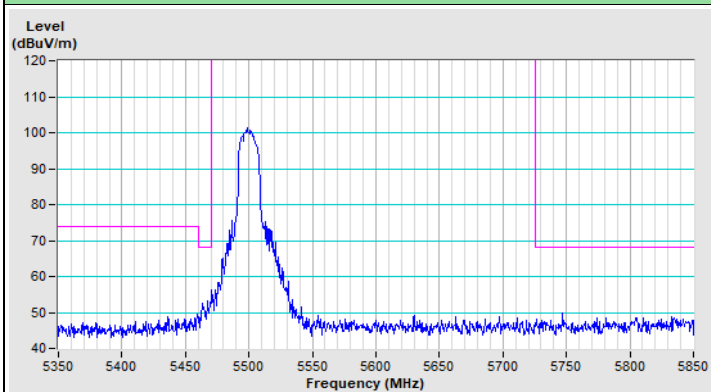


Horizontal (Peak)

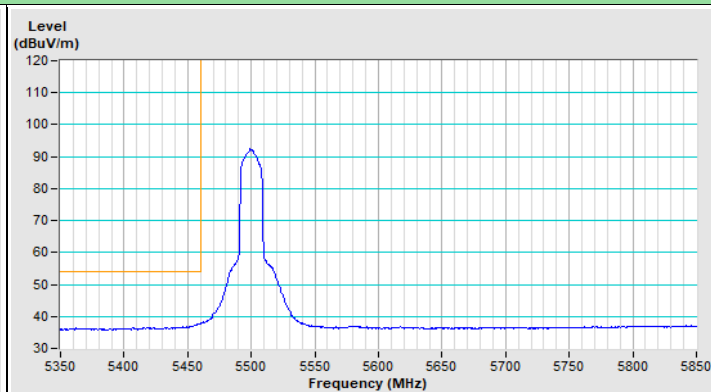

Horizontal (Average)

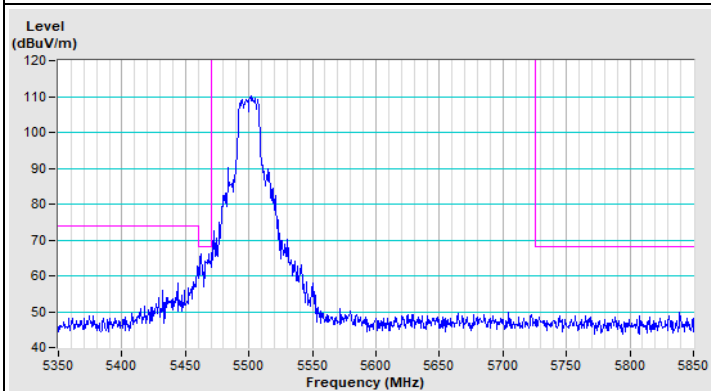


Vertical (Peak)

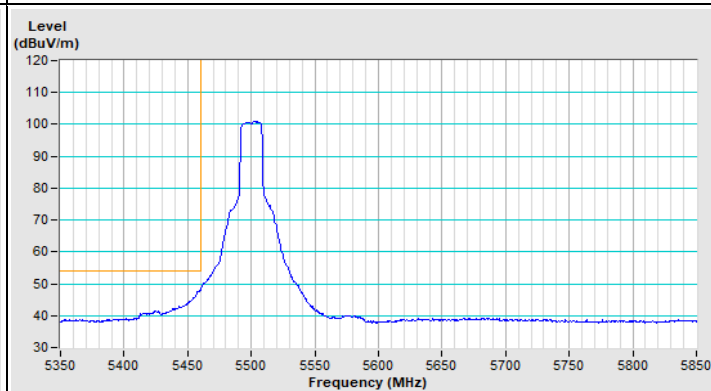


Vertical (Average)

802.11a Channel 149

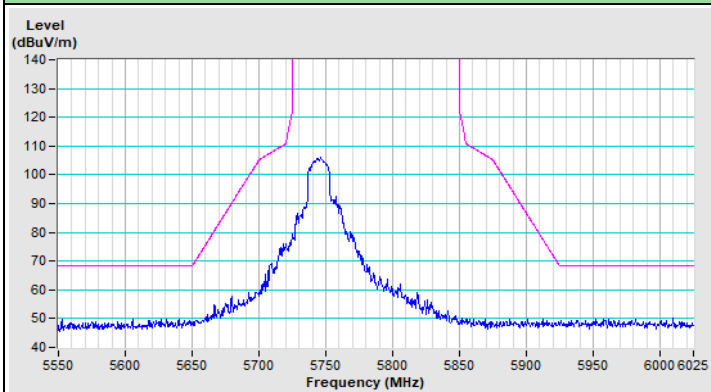


Horizontal (Peak)

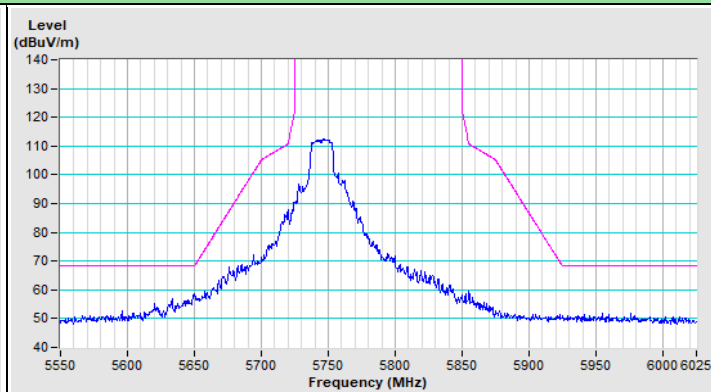


Vertical (Peak)

802.11a Channel 157

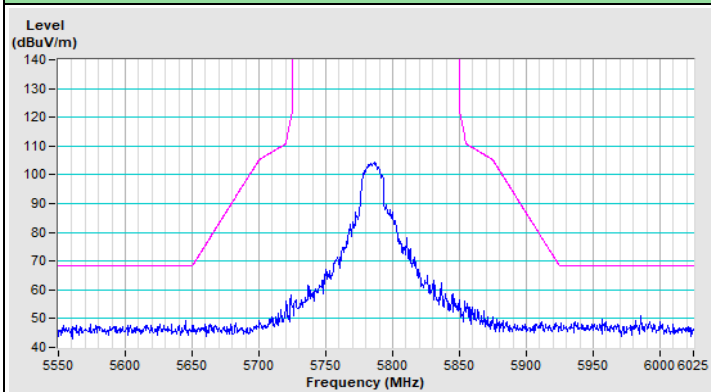


Horizontal (Peak)

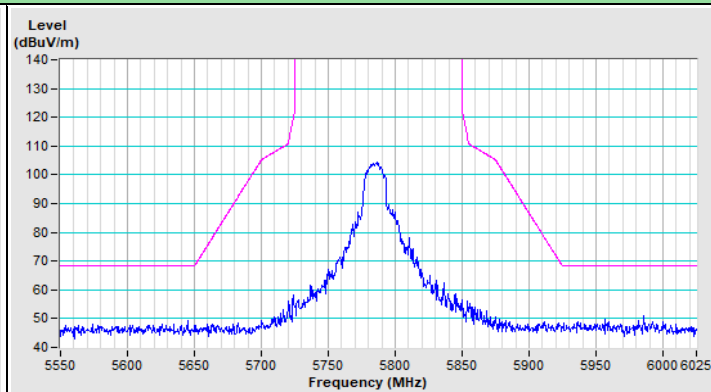


Vertical (Peak)

802.11a Channel 165

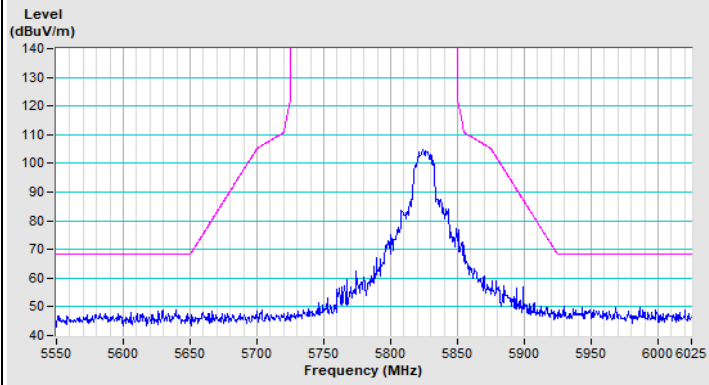


Horizontal (Peak)

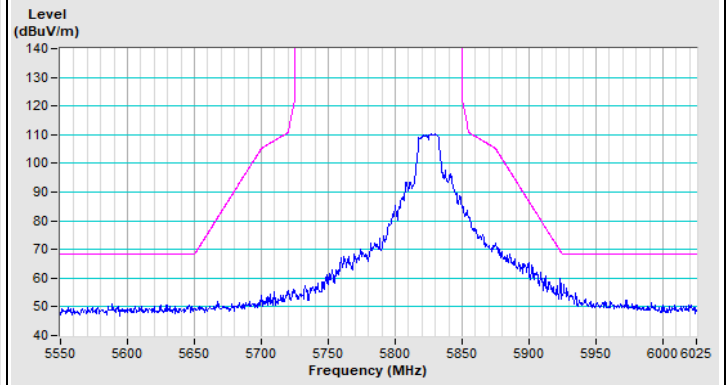


Vertical (Peak)


802.11ax (HE20) Channel 36

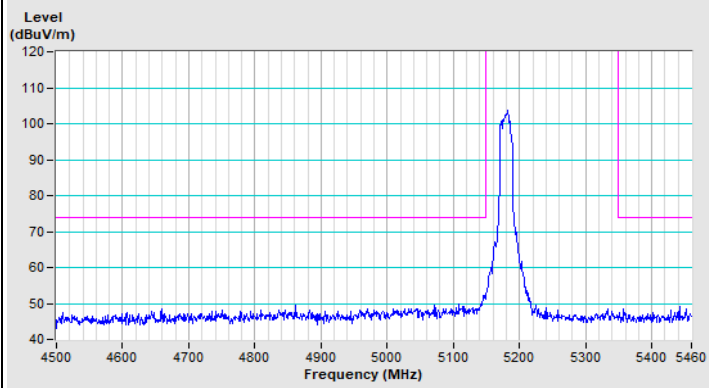


Horizontal (Peak)

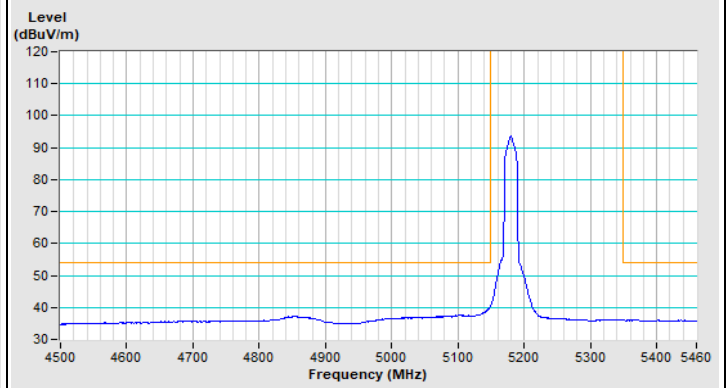

Horizontal (Average)

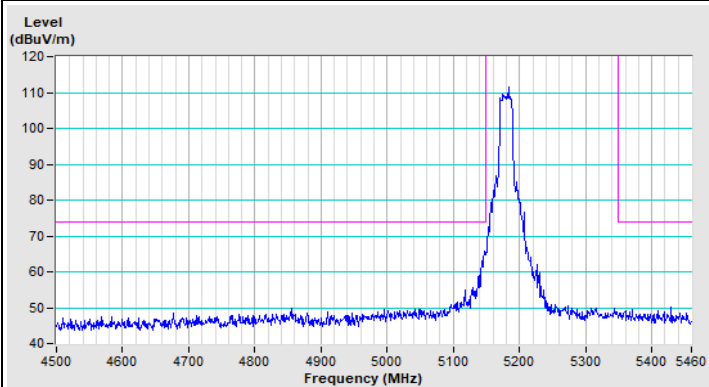


Vertical (Peak)

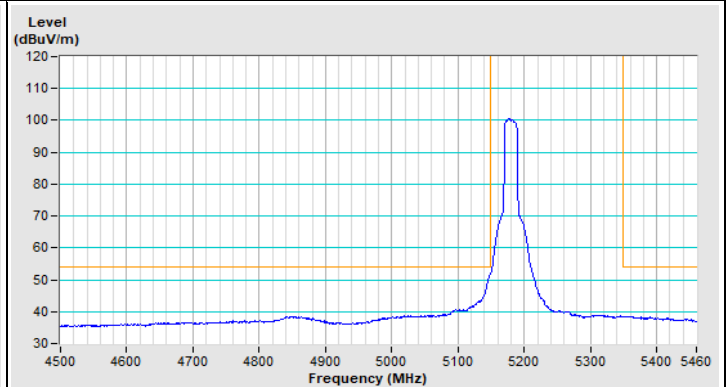


Vertical (Average)


802.11ax (HE20) Channel 64

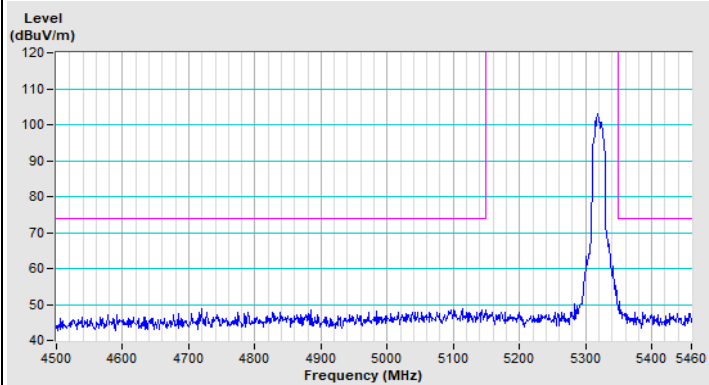


Horizontal (Peak)

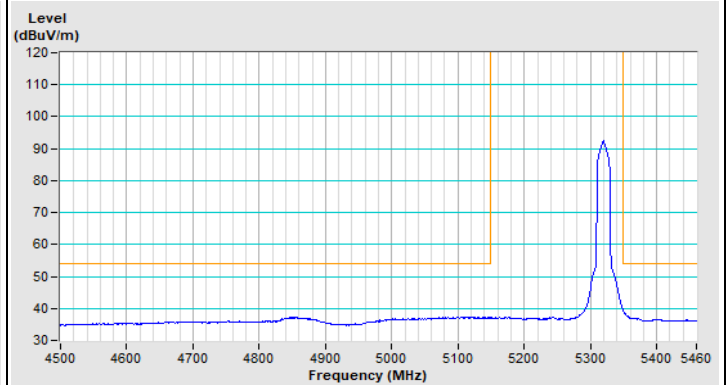

Horizontal (Average)

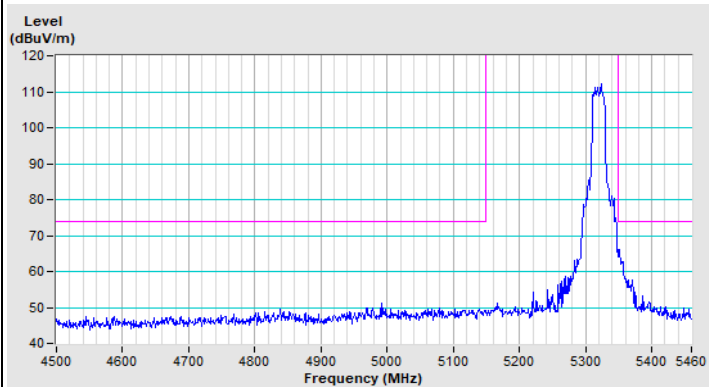


Vertical (Peak)

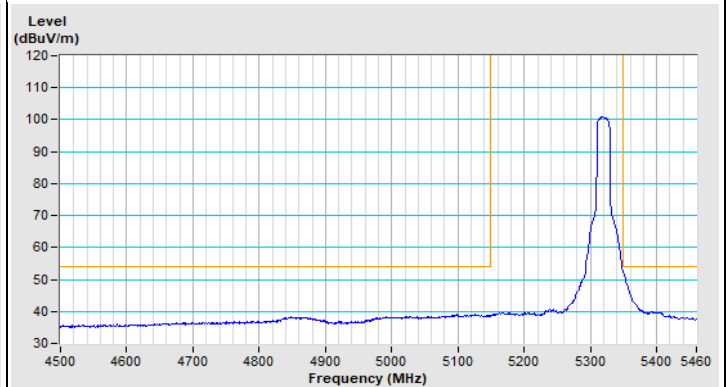


Vertical (Average)


802.11ax (HE20) Channel 100

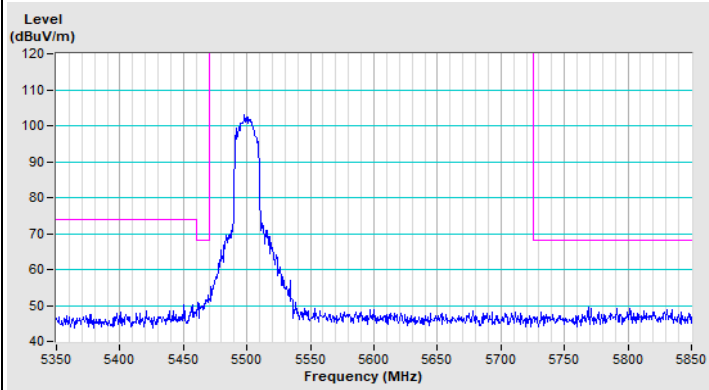


Horizontal (Peak)

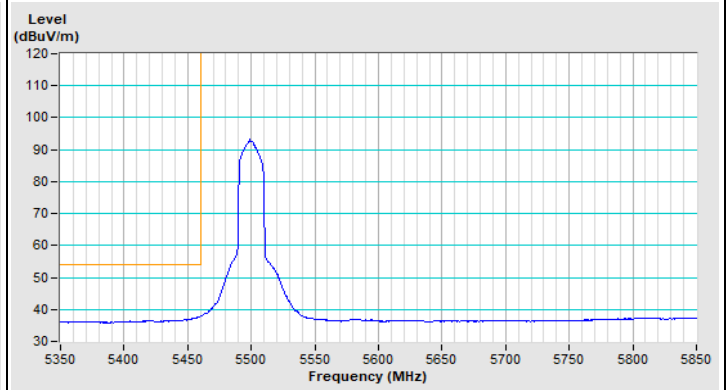

Horizontal (Average)

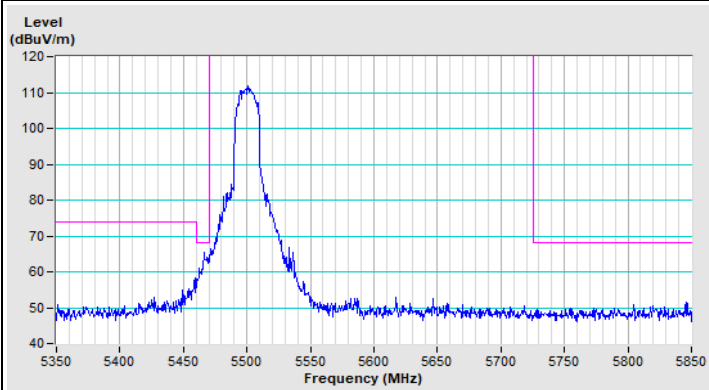


Vertical (Peak)

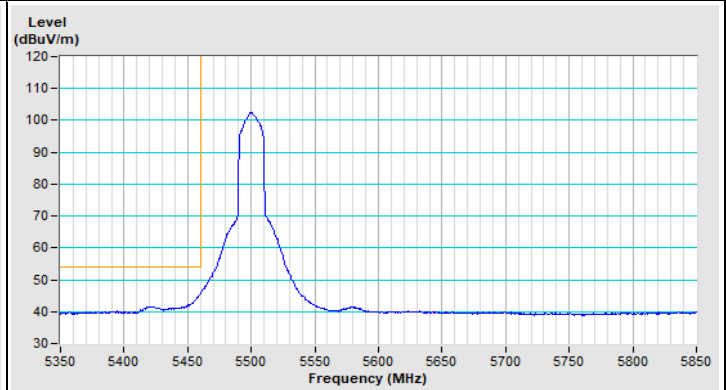


Vertical (Average)

802.11ax (HE20) Channel 149

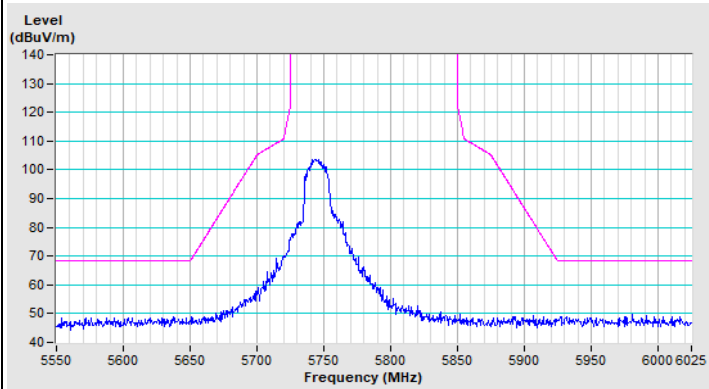


Horizontal (Peak)

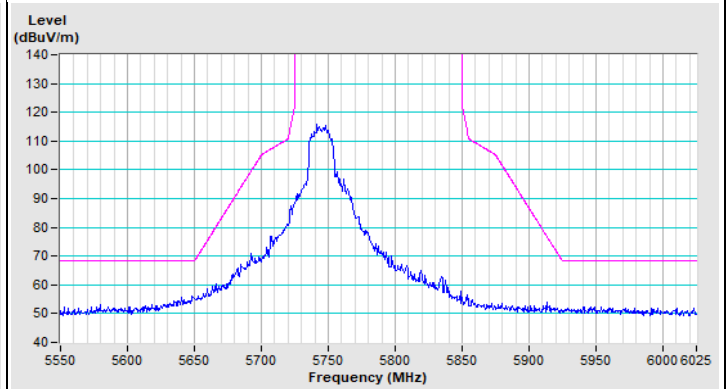


Vertical (Peak)

802.11ax (HE20) Channel 157

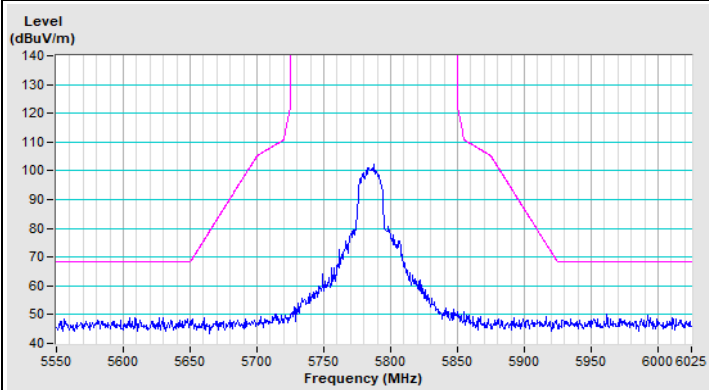


Horizontal (Peak)

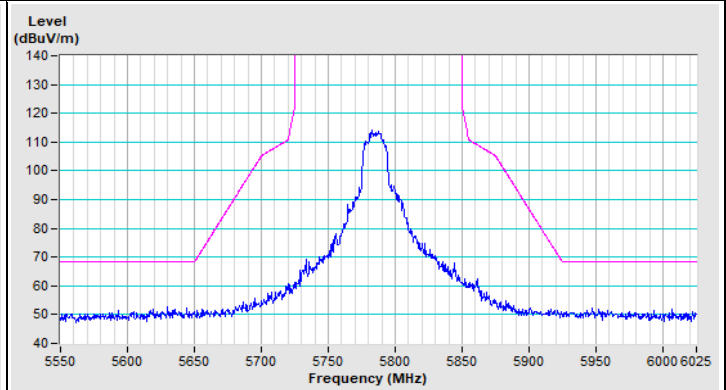


Vertical (Peak)



802.11ax (HE20) Channel 165

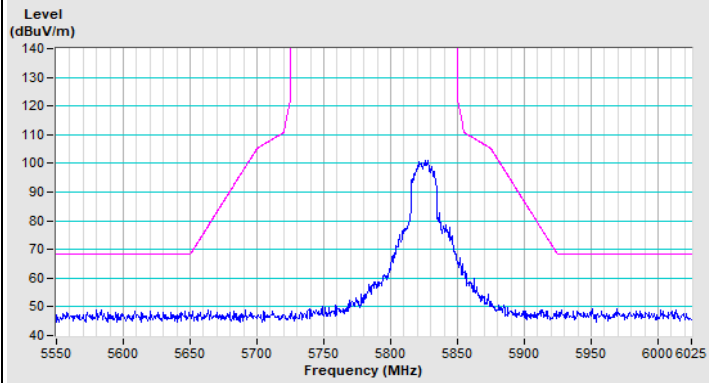


Horizontal (Peak)

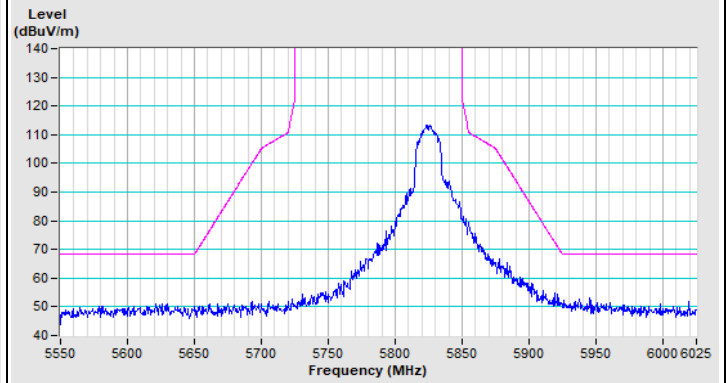


Vertical (Peak)


802.11ax (HE40) Channel 38

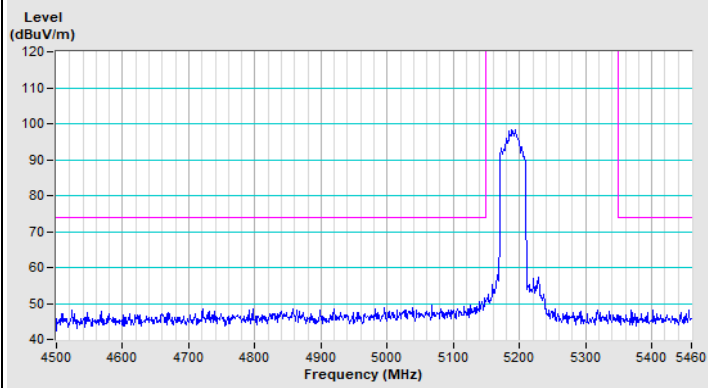


Horizontal (Peak)

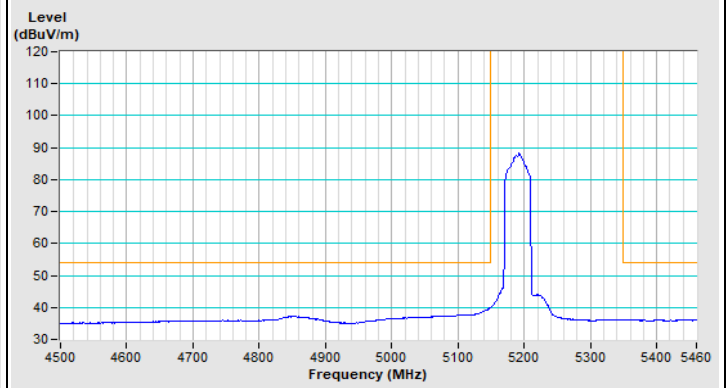

Horizontal (Average)

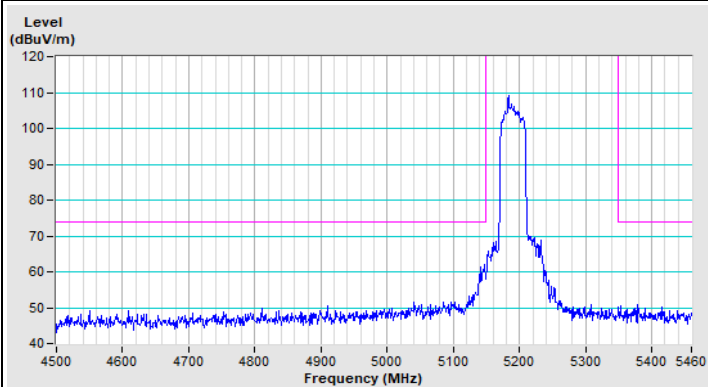


Vertical (Peak)

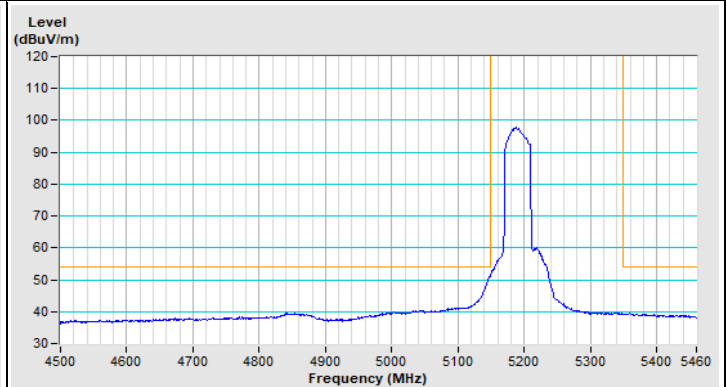


Vertical (Average)


802.11ax (HE40) Channel 62

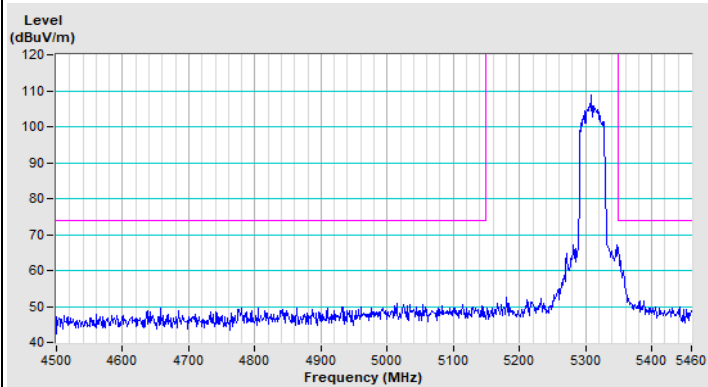


Horizontal (Peak)

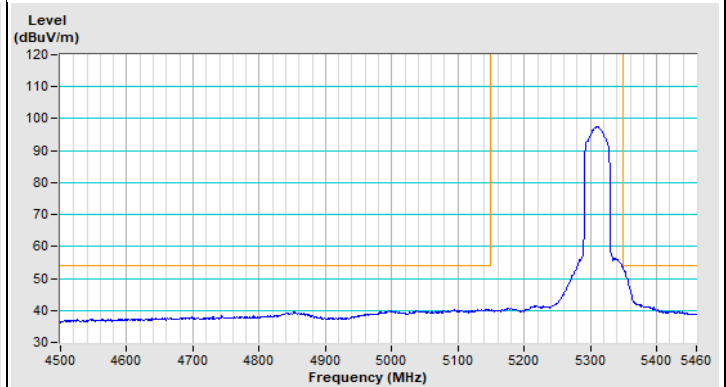

Horizontal (Average)

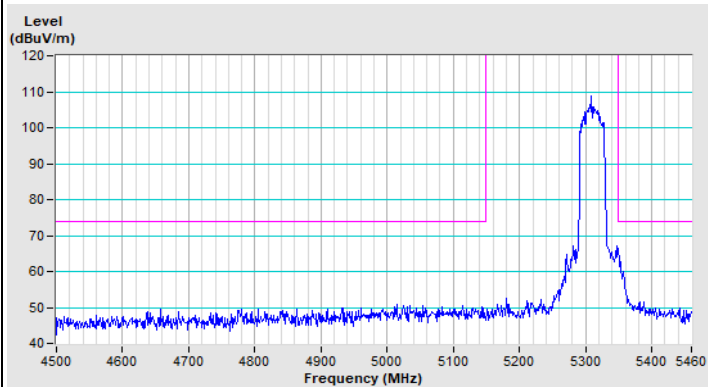


Vertical (Peak)

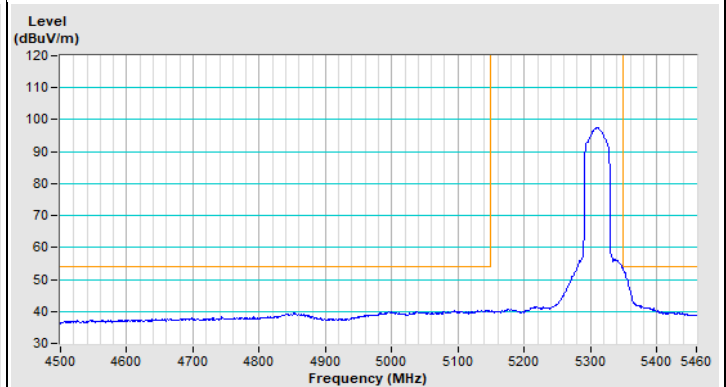


Vertical (Average)


802.11ax (HE40) Channel 102

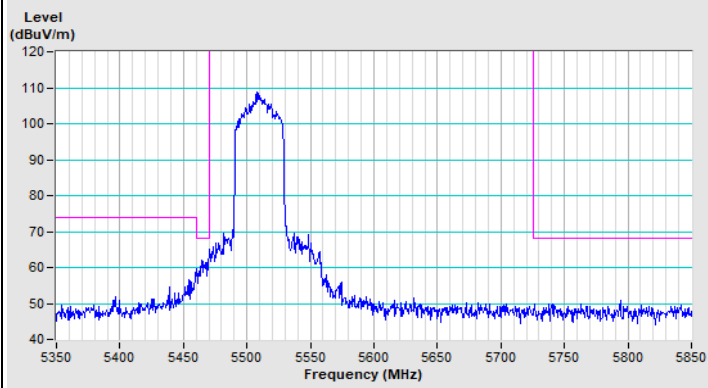


Horizontal (Peak)

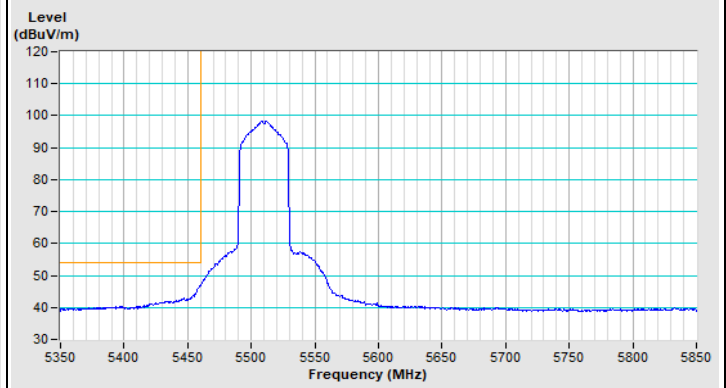

Horizontal (Average)

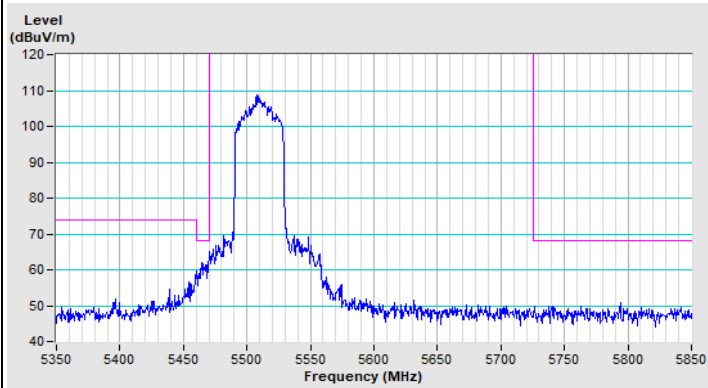


Vertical (Peak)

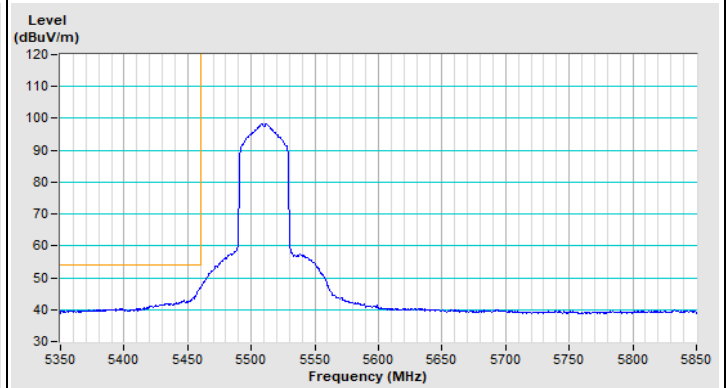


Vertical (Average)

802.11ax (HE40) Channel 151

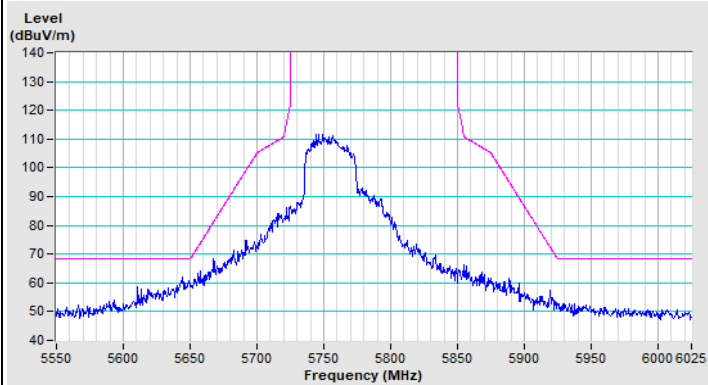


Horizontal (Peak)

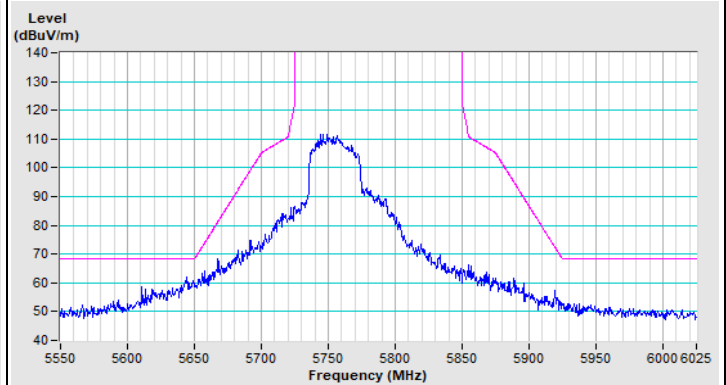


Vertical (Peak)

802.11ax (HE40) Channel 159

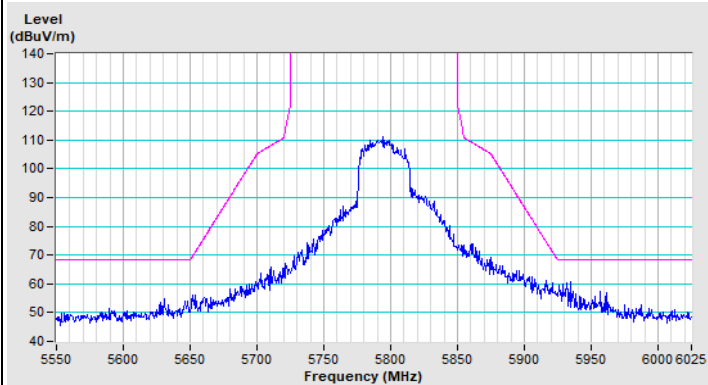


Horizontal (Peak)

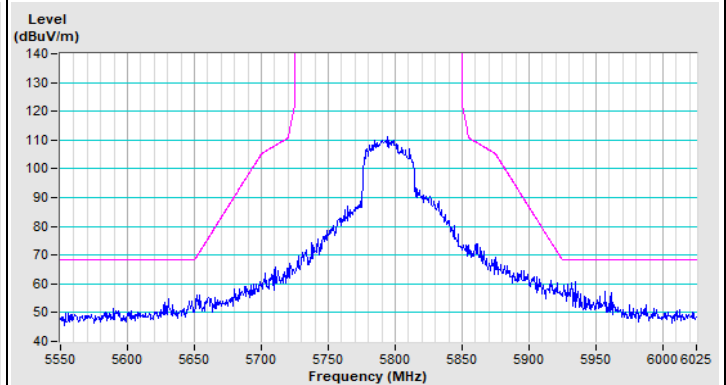


Vertical (Peak)


802.11ax (HE80) Channel 42

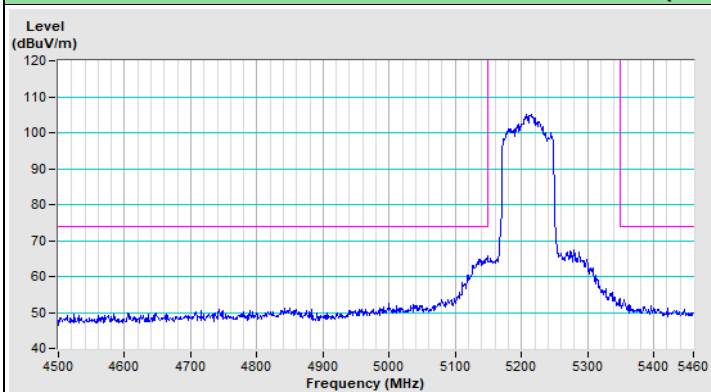


Horizontal (Peak)

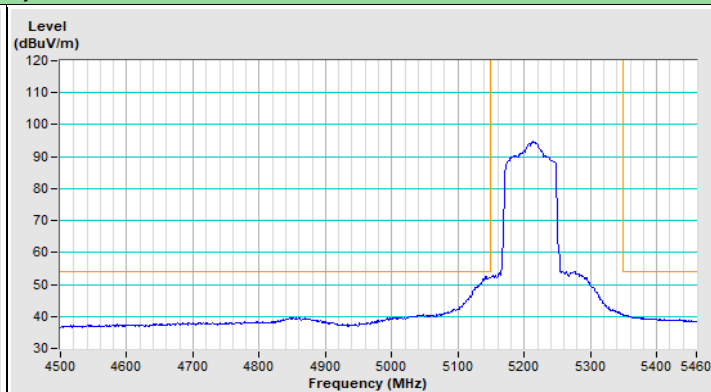

Horizontal (Average)

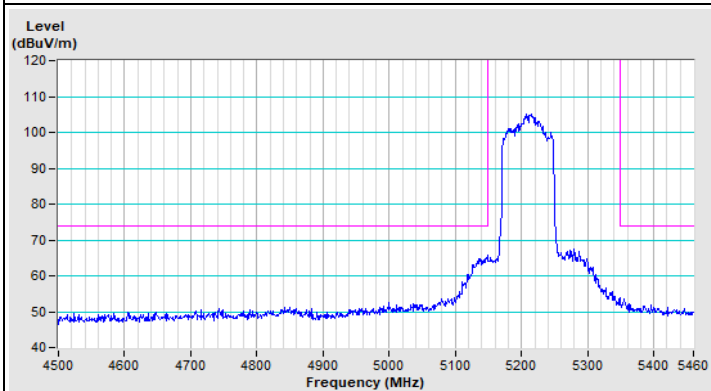


Vertical (Peak)

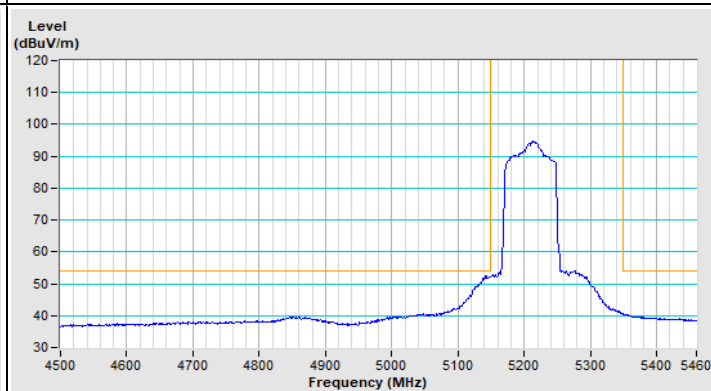


Vertical (Average)


802.11ax (HE80) Channel 58

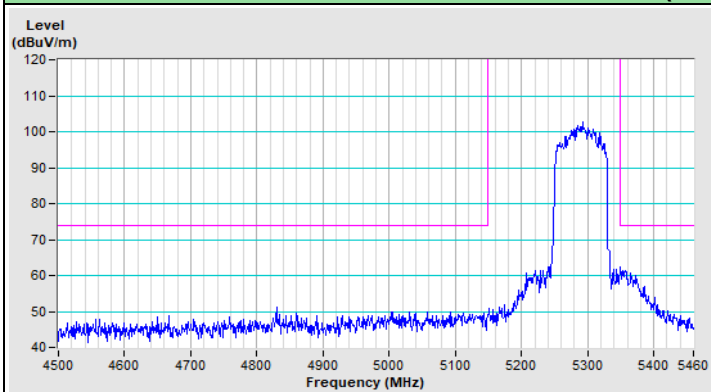


Horizontal (Peak)

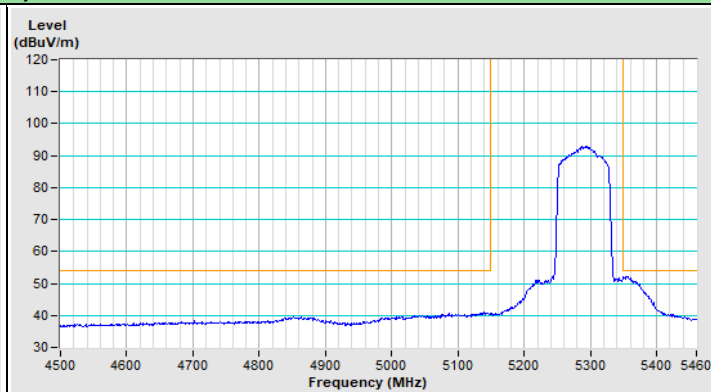

Horizontal (Average)

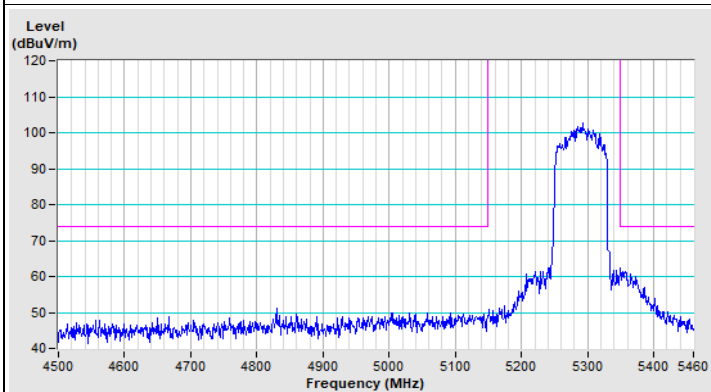


Vertical (Peak)

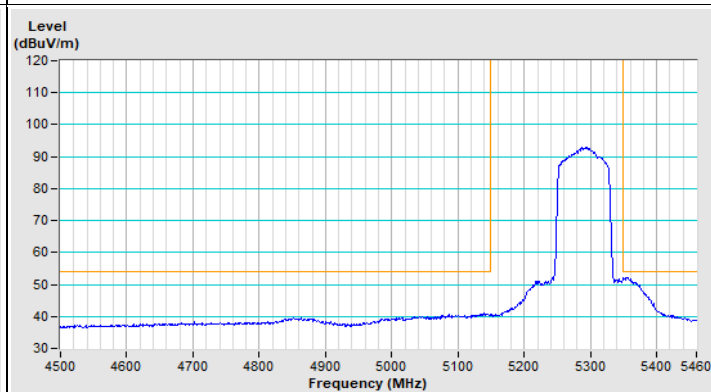


Vertical (Average)


802.11ax (HE80) Channel 106

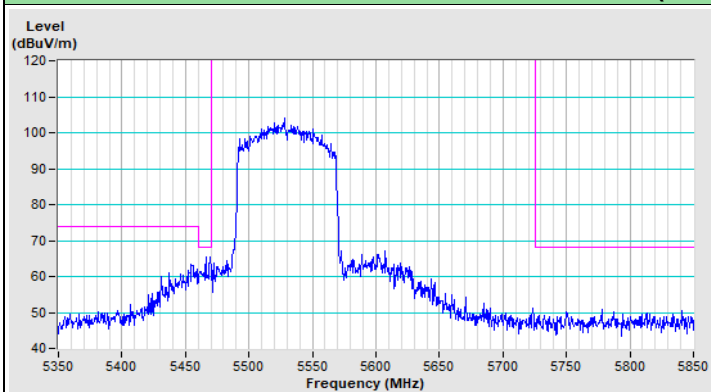


Horizontal (Peak)

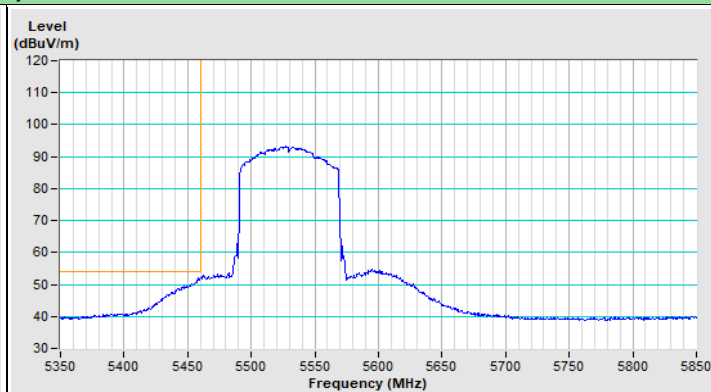

Horizontal (Average)

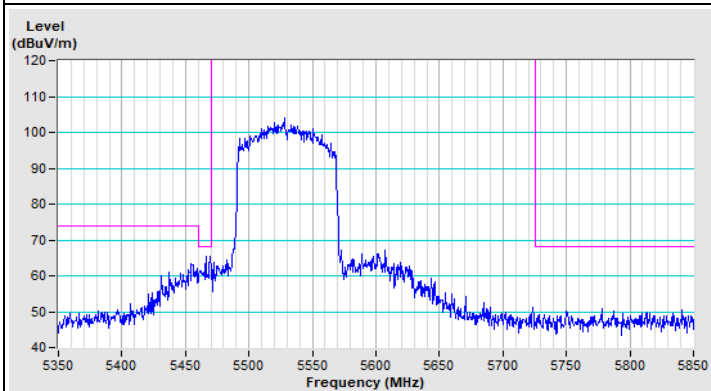


Vertical (Peak)

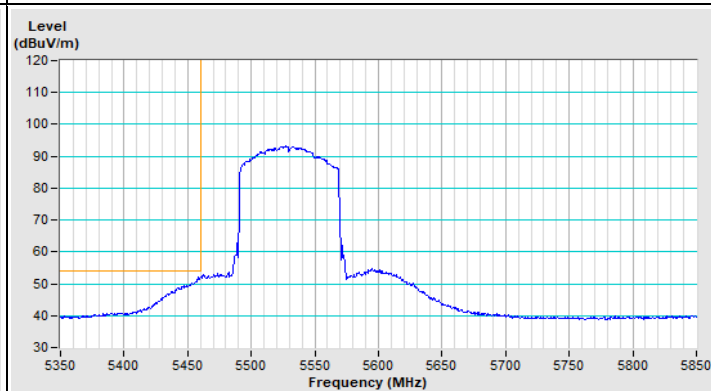


Vertical (Average)

802.11ax (HE80) Channel 155

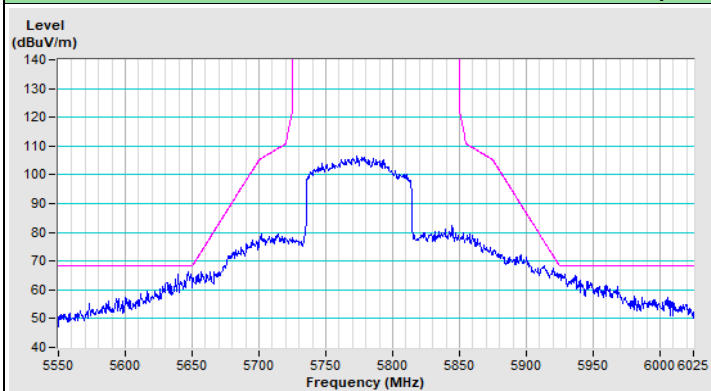


Horizontal (Peak)

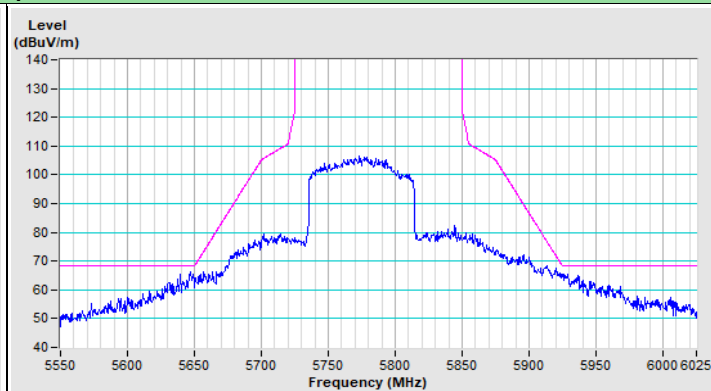


Vertical (Peak)


20 MHz Preamble 802.11ax (RU26) Channel 36

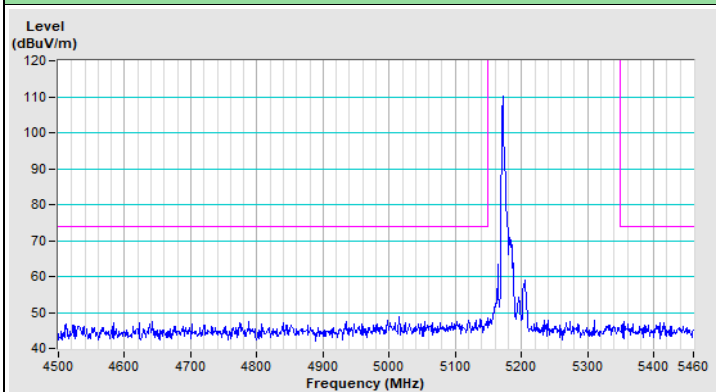


Horizontal (Peak)

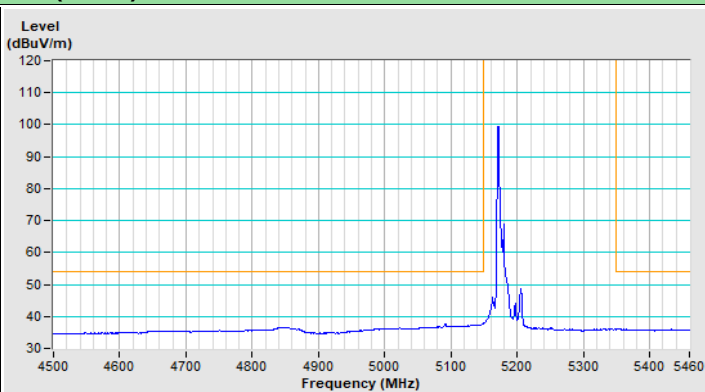

Horizontal (Average)

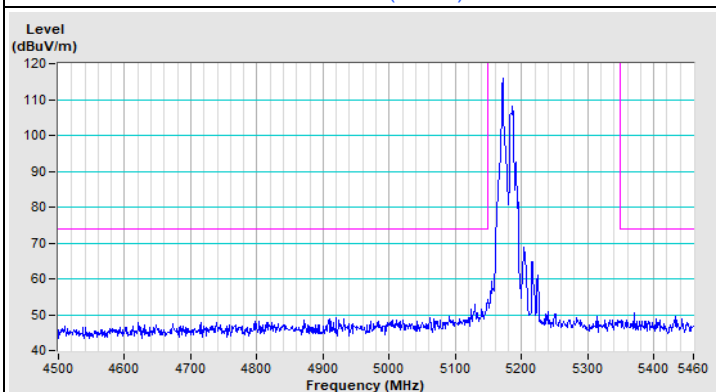


Vertical (Peak)

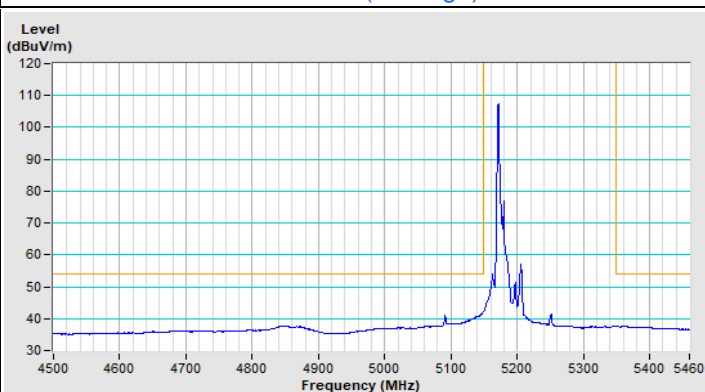


Vertical (Average)


20 MHz Preamble 802.11ax (RU26) Channel 64

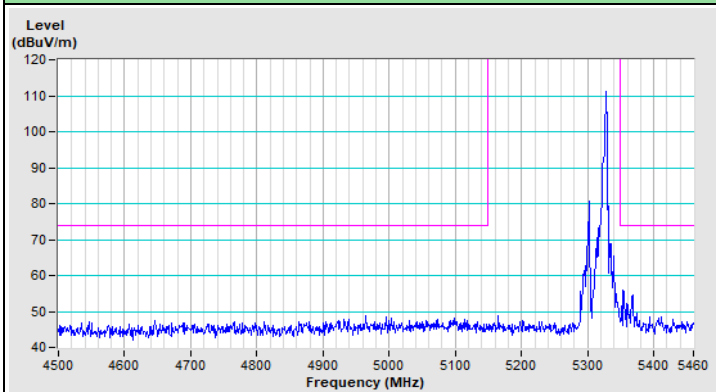


Horizontal (Peak)

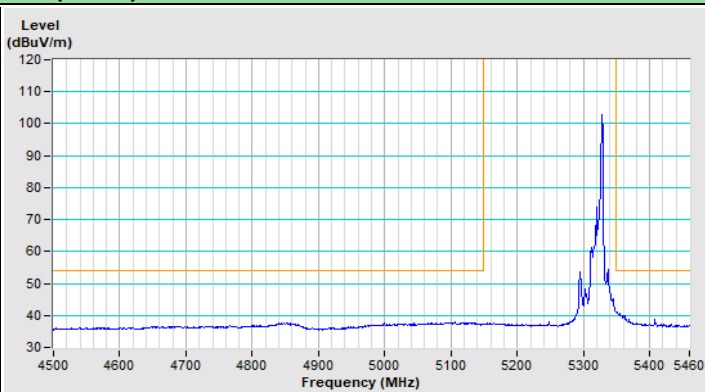

Horizontal (Average)

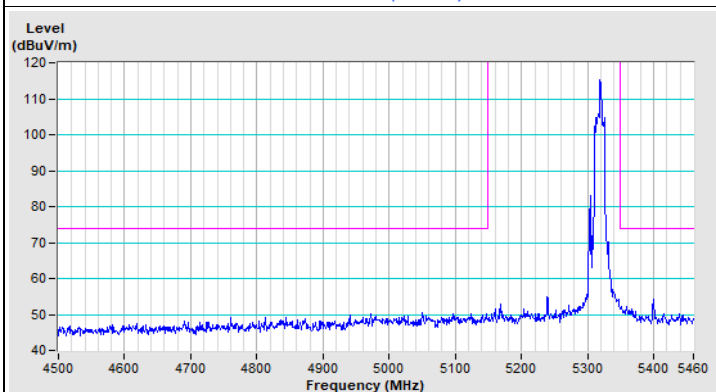


Vertical (Peak)

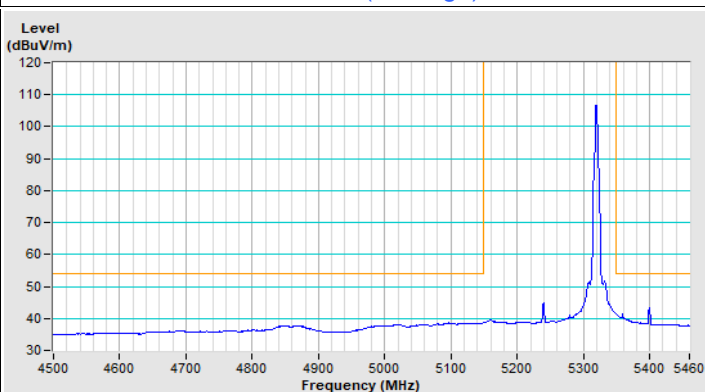


Vertical (Average)


20 MHz Preamble 802.11ax (RU26) Channel 100

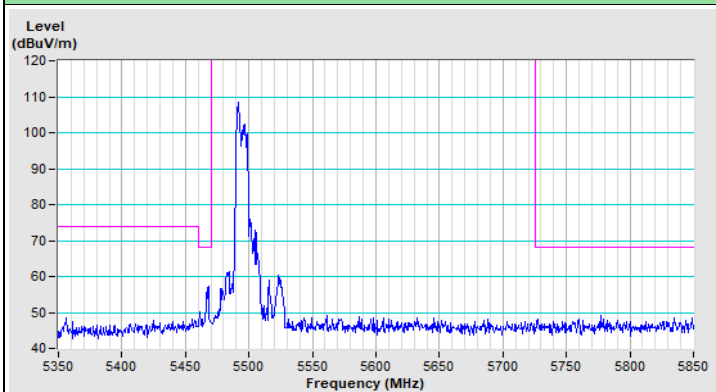


Horizontal (Peak)

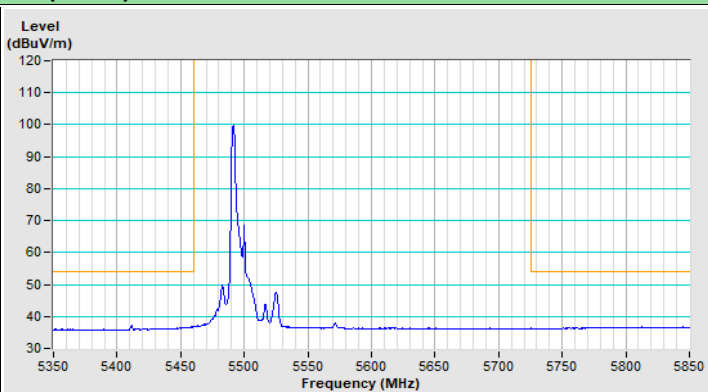

Horizontal (Average)

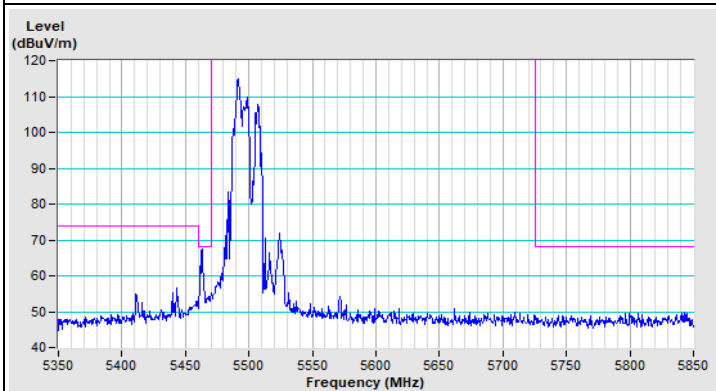


Vertical (Peak)

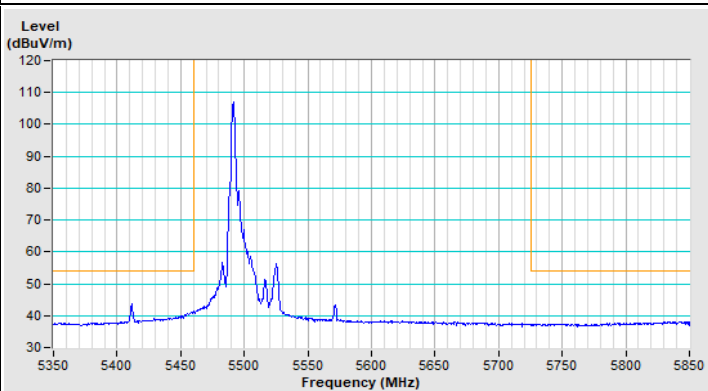


Vertical (Average)

20 MHz Preamble 802.11ax (RU26) Channel 149

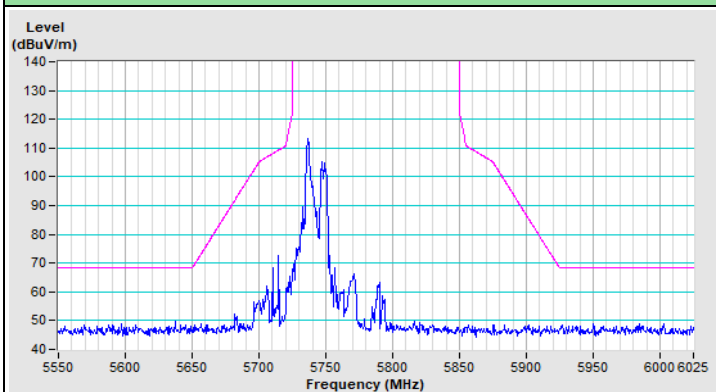


Horizontal (Peak)

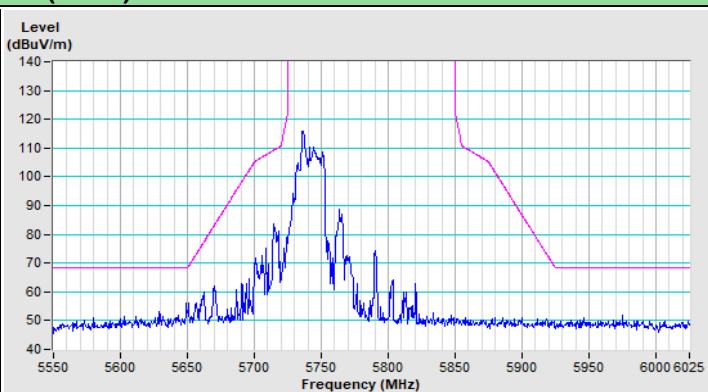


Vertical (Peak)

20 MHz Preamble 802.11ax (RU26) Channel 157

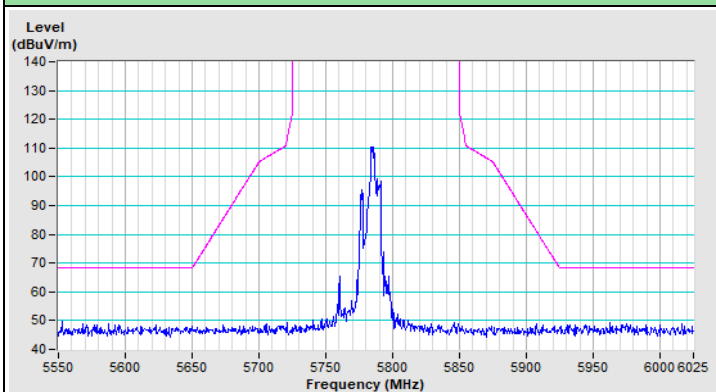


Horizontal (Peak)

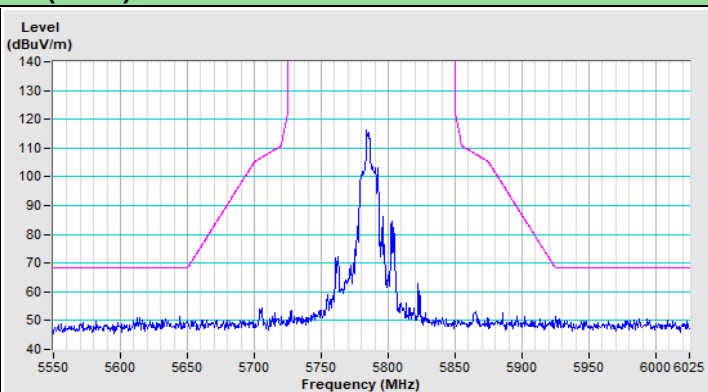


Vertical (Peak)

20 MHz Preamble 802.11ax (RU26) Channel 165

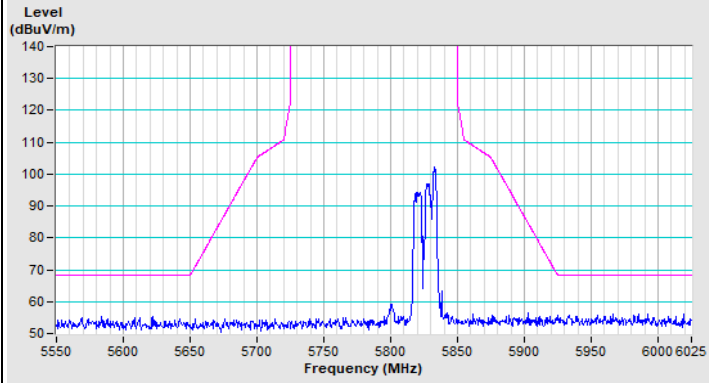


Horizontal (Peak)

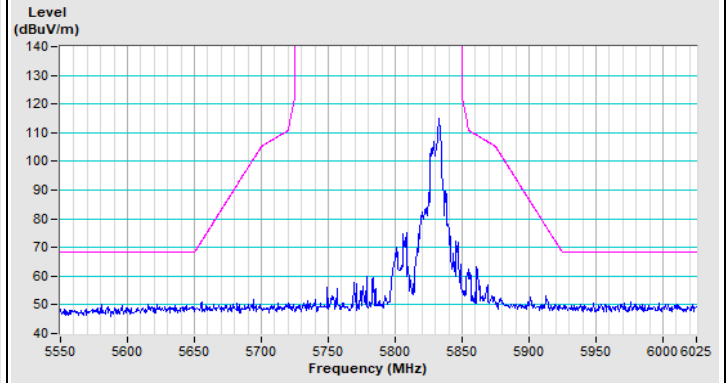


Vertical (Peak)


20 MHz Preamble 802.11ax (RU52) Channel 36

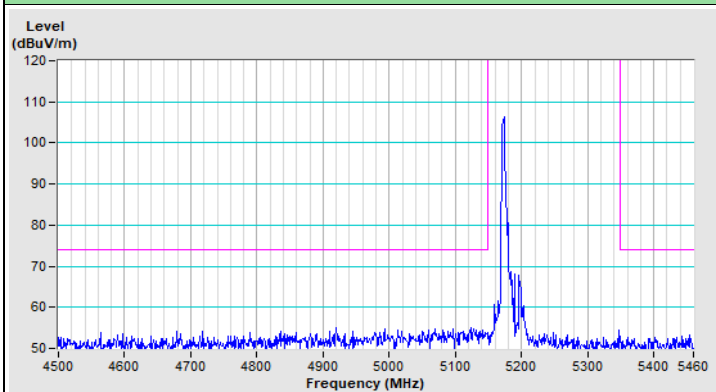


Horizontal (Peak)

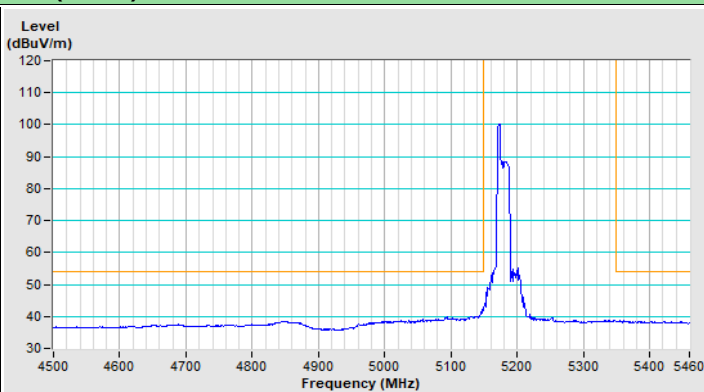

Horizontal (Average)

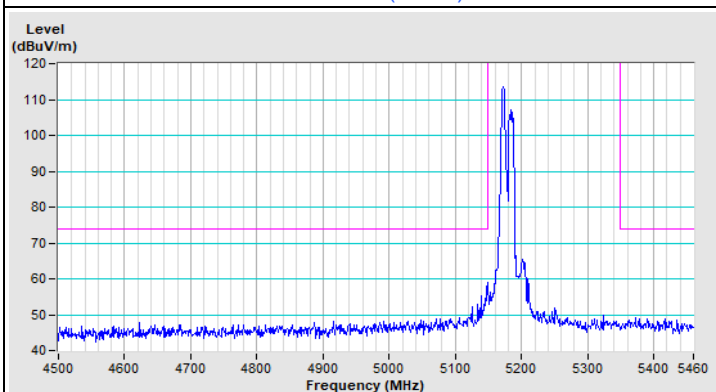


Vertical (Peak)

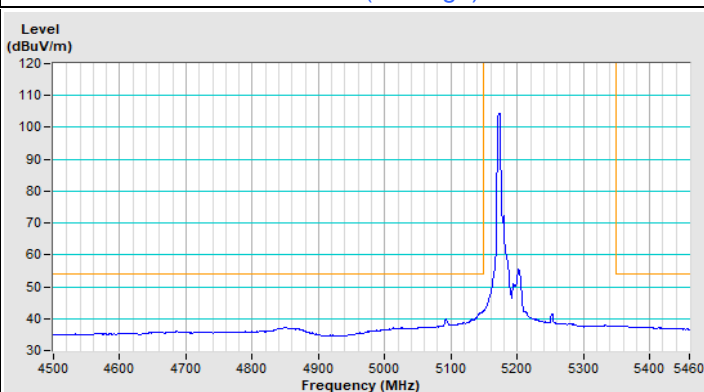


Vertical (Average)


20 MHz Preamble 802.11ax (RU52) Channel 64

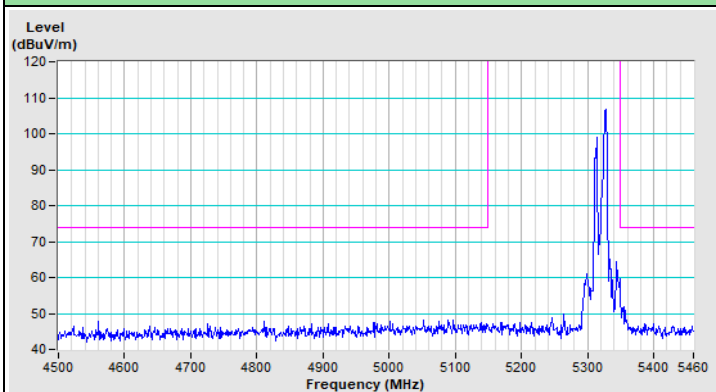


Horizontal (Peak)

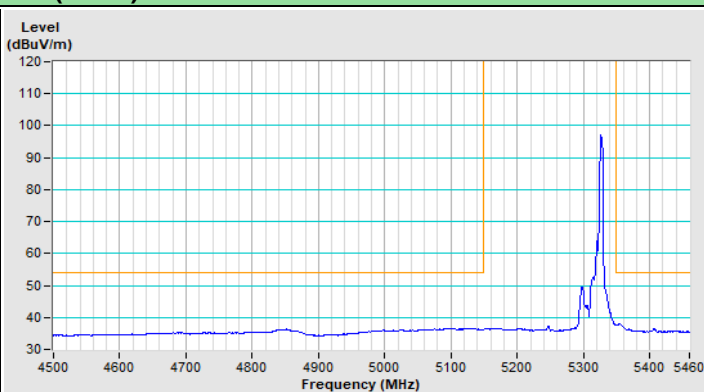

Horizontal (Average)

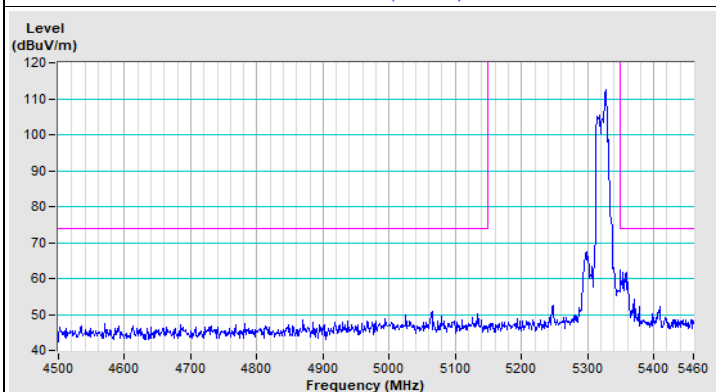


Vertical (Peak)

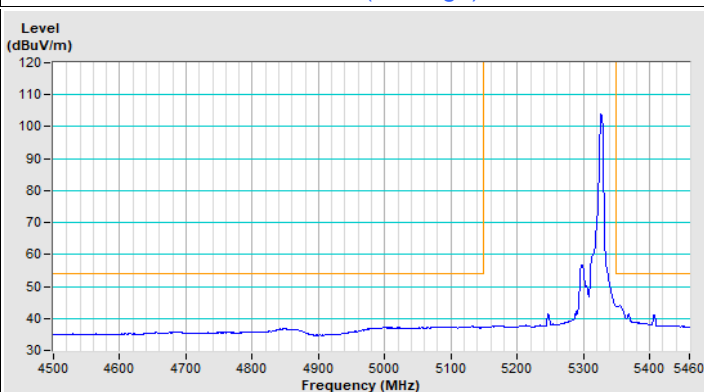


Vertical (Average)


20 MHz Preamble 802.11ax (RU52) Channel 100

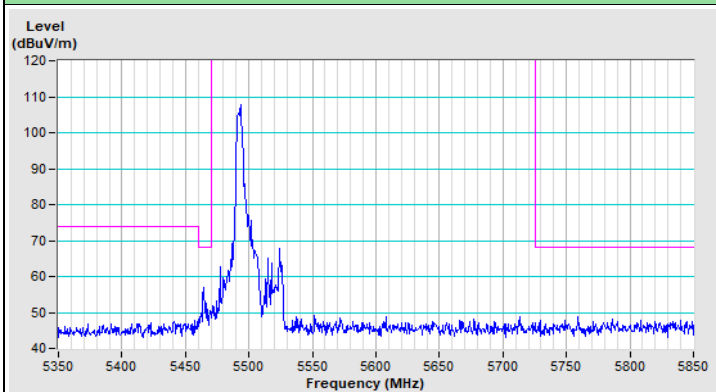


Horizontal (Peak)

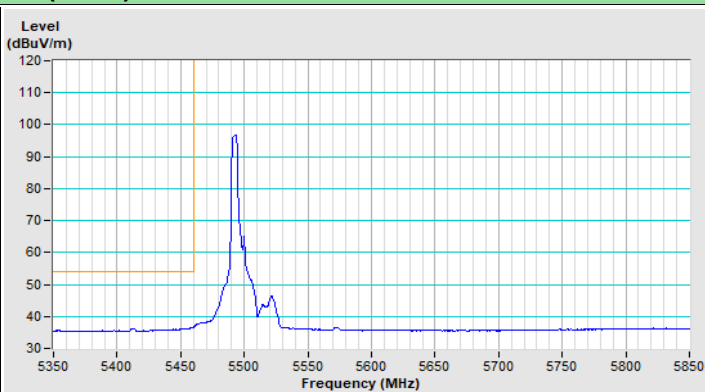

Horizontal (Average)

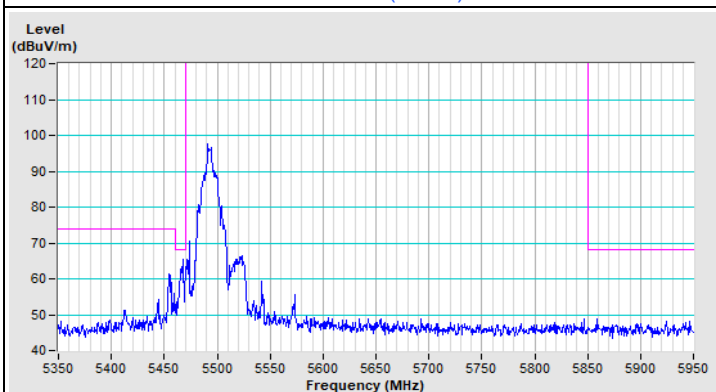


Vertical (Peak)

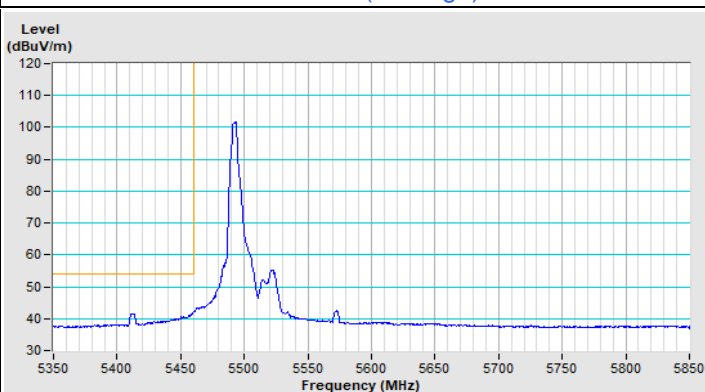


Vertical (Average)

20 MHz Preamble 802.11ax (RU52) Channel 149

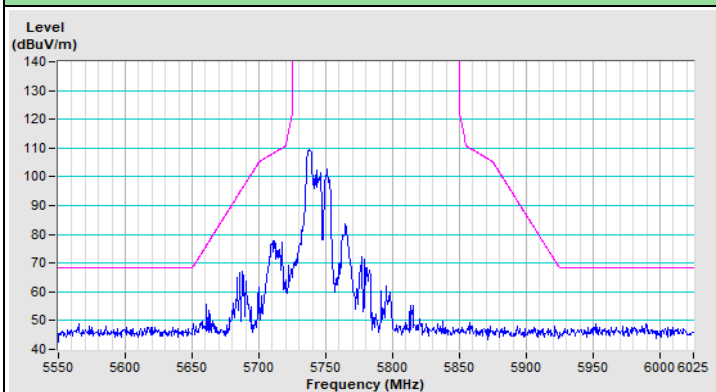


Horizontal (Peak)

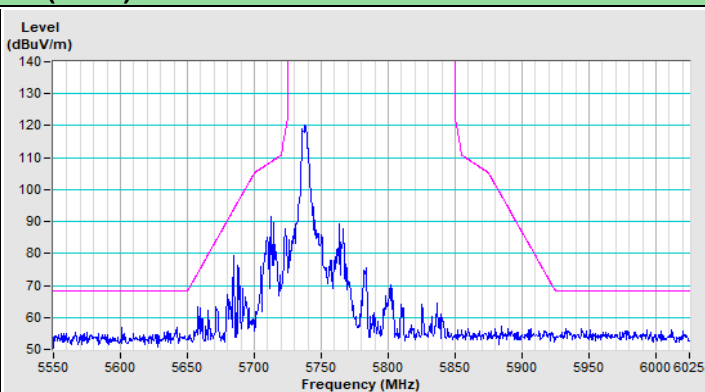


Vertical (Peak)

20 MHz Preamble 802.11ax (RU52) Channel 157

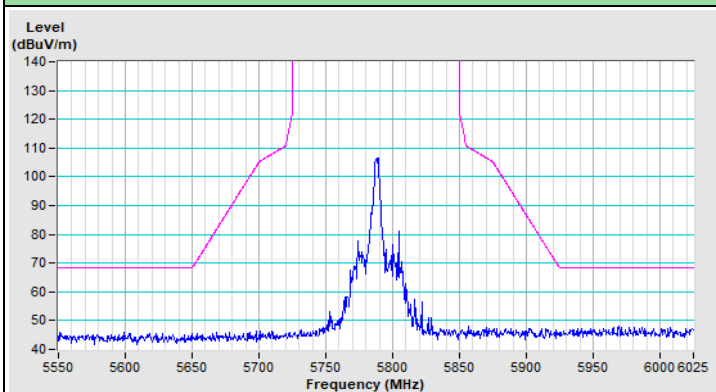


Horizontal (Peak)

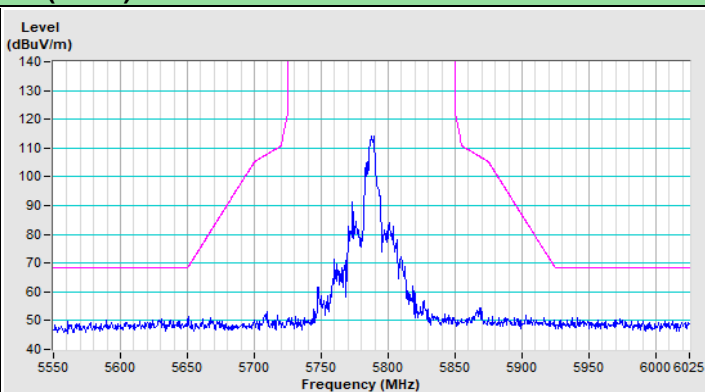


Vertical (Peak)

20 MHz Preamble 802.11ax (RU52) Channel 165

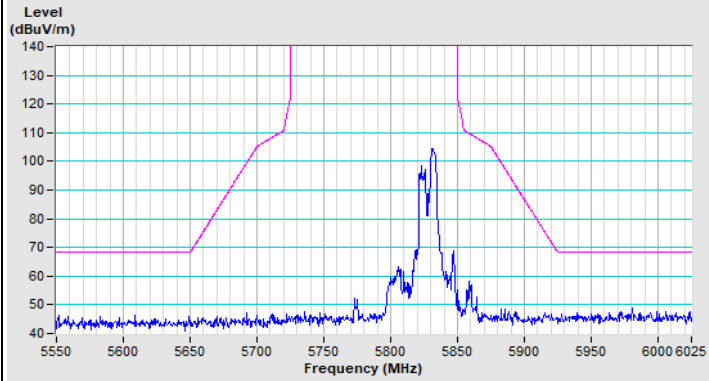


Horizontal (Peak)

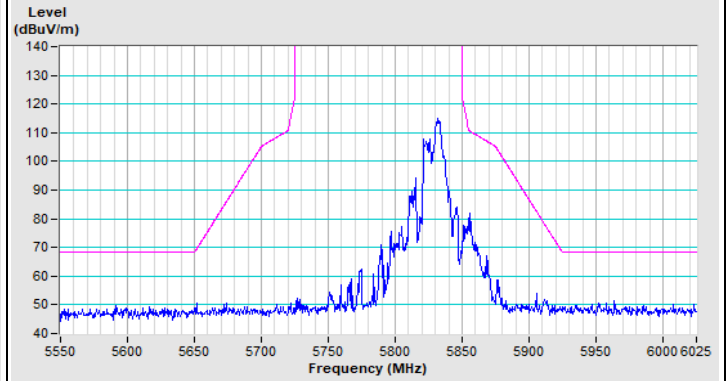


Vertical (Peak)


20 MHz Preamble 802.11ax (RU106) Channel 36

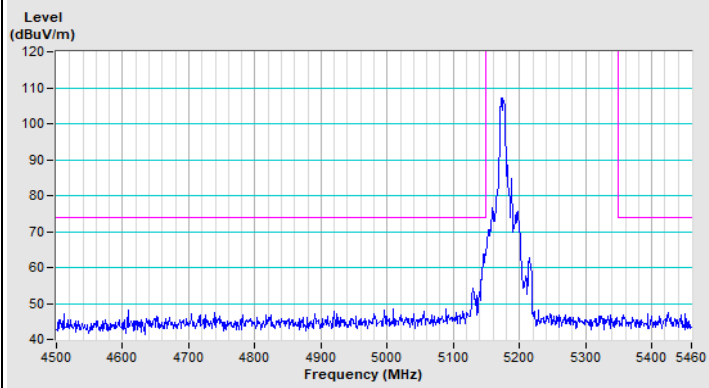


Horizontal (Peak)

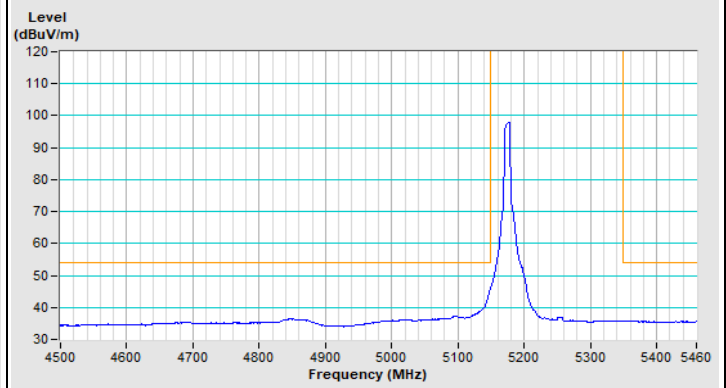

Horizontal (Average)

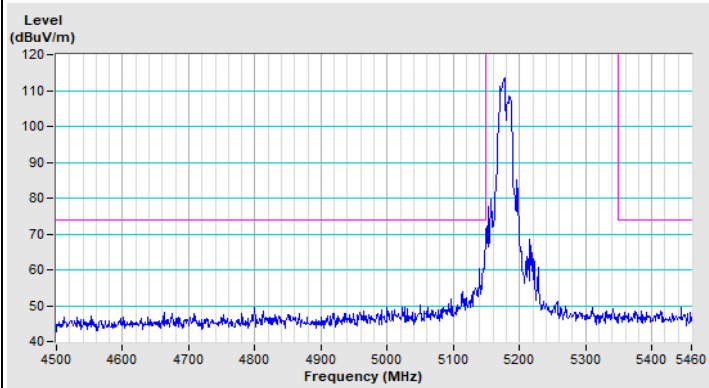


Vertical (Peak)

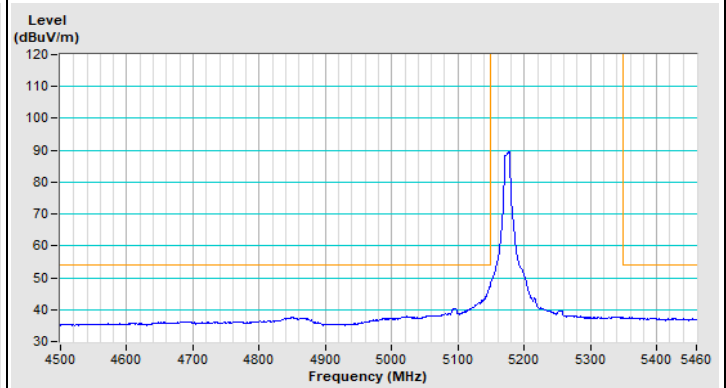


Vertical (Average)


20 MHz Preamble 802.11ax (RU106) Channel 64

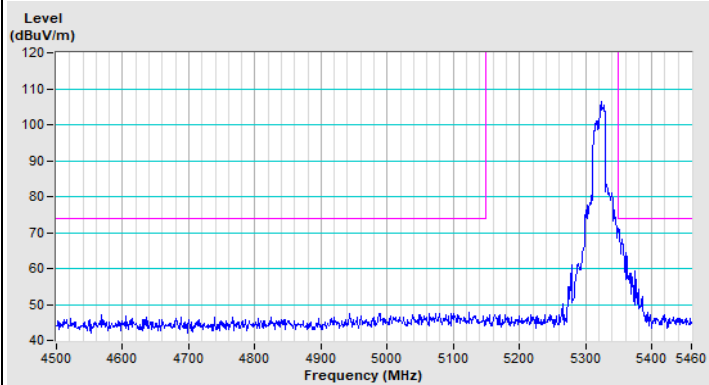


Horizontal (Peak)

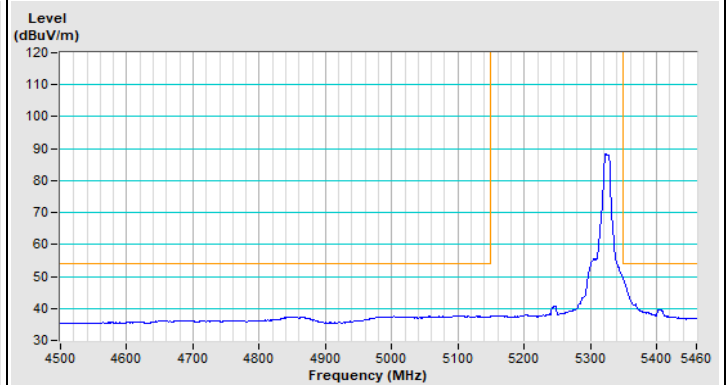

Horizontal (Average)

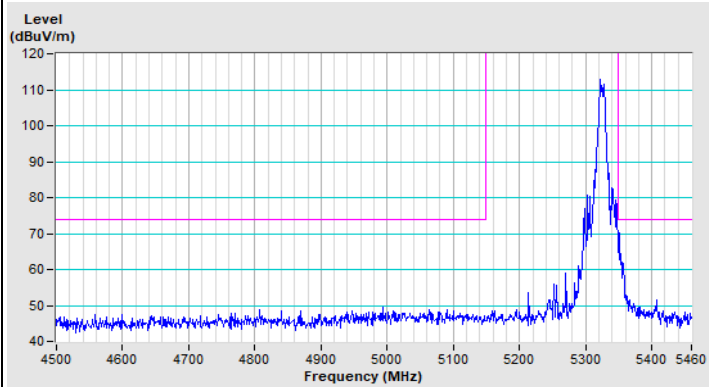

Vertical (Peak)

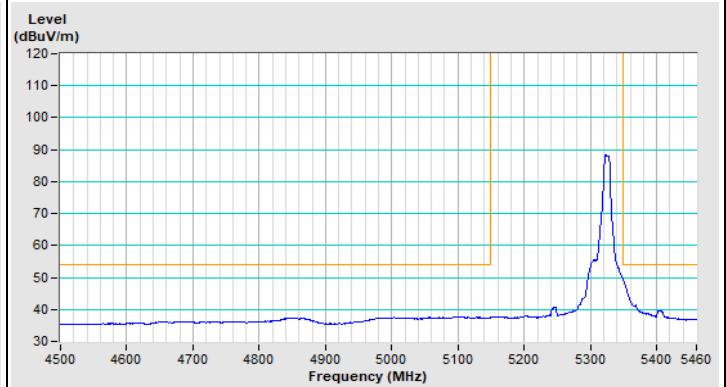

Vertical (Average)