


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5610.95	51.7 PK	68.2	-16.5	1.46 V	275	49.5	2.2
2	*5825.00	120.4 PK			1.46 V	275	117.6	2.8
3	*5825.00	110.5 AV			1.46 V	275	107.7	2.8
4	#5940.11	51.2 PK	68.2	-17.0	1.46 V	275	48.3	2.9
5	11650.00	47.4 PK	74.0	-26.6	1.74 V	294	35.5	11.9
6	11650.00	36.9 AV	54.0	-17.1	1.74 V	294	25.0	11.9
7	#17475.00	54.4 PK	68.2	-13.8	2.29 V	255	35.9	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

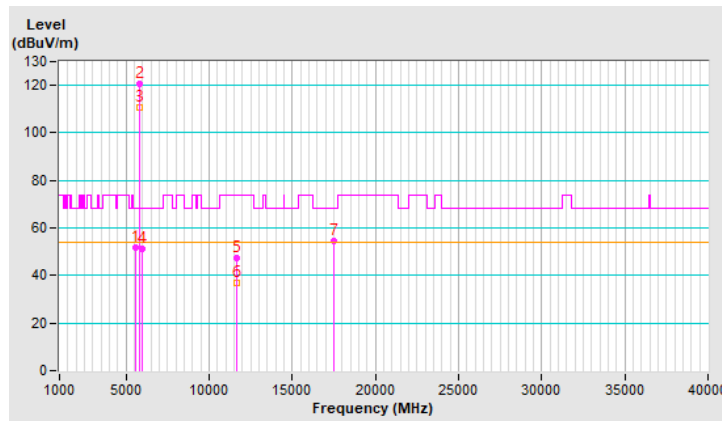


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	5150.00	60.7 PK	74.0	-13.3	1.01 H	234	58.3	2.4
2	5150.00	39.9 AV	54.0	-14.1	1.01 H	234	37.5	2.4
3	*5180.00	107.9 PK			1.01 H	234	105.7	2.2
4	*5180.00	97.1 AV			1.01 H	234	94.9	2.2
5	#10360.00	55.7 PK	68.2	-12.5	1.58 H	257	44.0	11.7
6	15540.00	53.5 PK	74.0	-20.5	1.35 H	298	41.7	11.8
7	15540.00	40.7 AV	54.0	-13.3	1.35 H	298	28.9	11.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

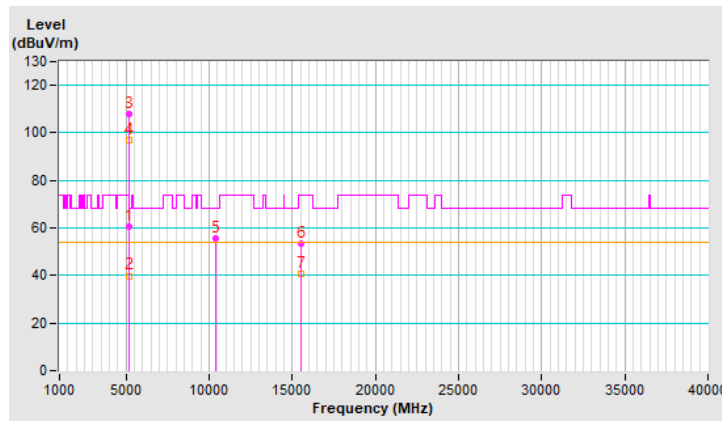


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.5 PK	74.0	-1.5	1.47 V	259	70.1	2.4
2	5150.00	44.6 AV	54.0	-9.4	1.47 V	259	42.2	2.4
3	*5180.00	116.9 PK			1.47 V	259	114.7	2.2
4	*5180.00	105.7 AV			1.47 V	259	103.5	2.2
5	#10360.00	47.9 PK	68.2	-20.3	1.69 V	280	36.2	11.7
6	15540.00	55.9 PK	74.0	-18.1	2.30 V	258	44.1	11.8
7	15540.00	43.2 AV	54.0	-10.8	2.30 V	258	31.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

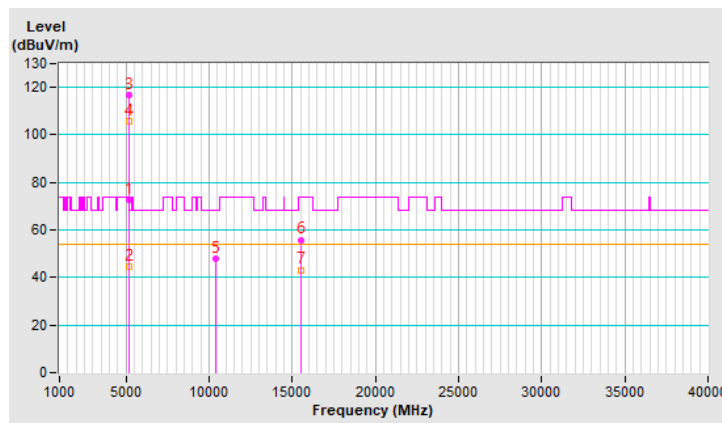


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	107.7 PK			1.06 H	249	105.6	2.1
2	*5200.00	97.9 AV			1.06 H	249	95.8	2.1
3	#10400.00	56.0 PK	68.2	-12.2	1.61 H	246	44.1	11.9
4	15600.00	53.1 PK	74.0	-20.9	1.36 H	288	41.6	11.5
5	15600.00	40.5 AV	54.0	-13.5	1.36 H	288	29.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

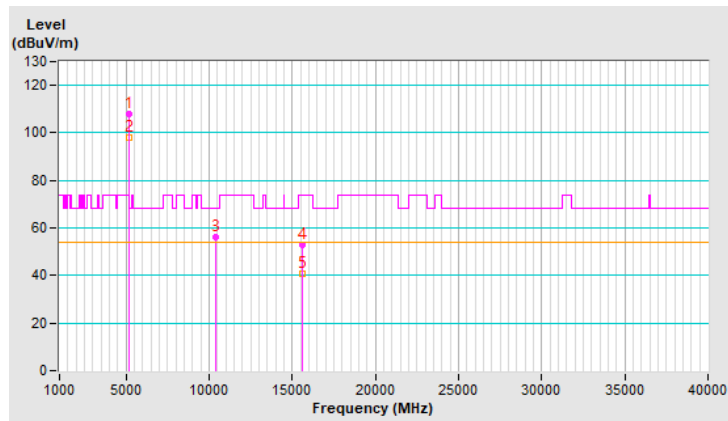




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	118.5 PK			1.20 V	245	116.4	2.1
2	*5200.00	107.8 AV			1.20 V	245	105.7	2.1
3	#10400.00	47.7 PK	68.2	-20.5	1.63 V	281	35.8	11.9
4	15600.00	55.7 PK	74.0	-18.3	2.24 V	248	44.2	11.5
5	15600.00	43.1 AV	54.0	-10.9	2.24 V	248	31.6	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

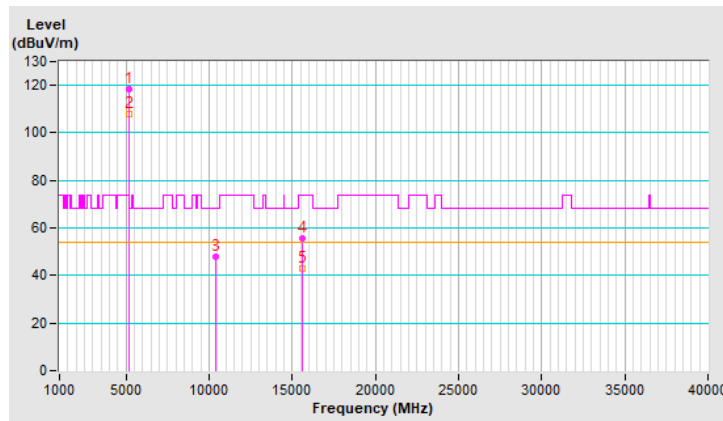


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	107.3 PK			1.00 H	239	105.4	1.9
2	*5240.00	97.3 AV			1.00 H	239	95.4	1.9
3	#10480.00	55.1 PK	68.2	-13.1	1.55 H	247	43.2	11.9
4	15720.00	53.6 PK	74.0	-20.4	1.29 H	303	41.9	11.7
5	15720.00	40.9 AV	54.0	-13.1	1.29 H	303	29.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

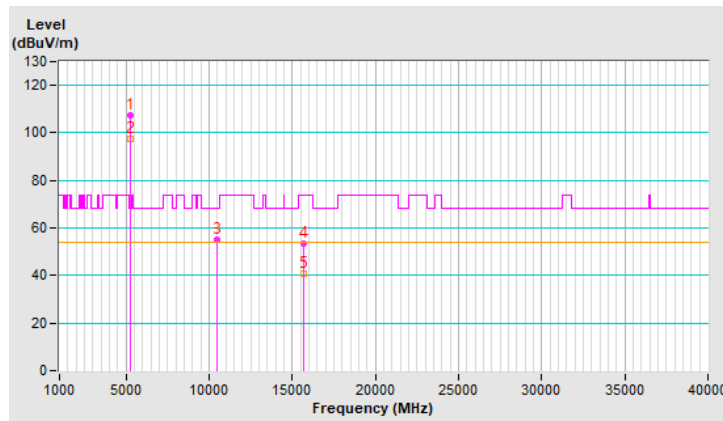




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5240.00	117.9 PK			1.30 V	263	116.0	1.9
2	*5240.00	107.2 AV			1.30 V	263	105.3	1.9
3	#10480.00	48.0 PK	68.2	-20.2	1.68 V	290	36.1	11.9
4	15720.00	55.5 PK	74.0	-18.5	2.25 V	259	43.8	11.7
5	15720.00	43.0 AV	54.0	-11.0	2.25 V	259	31.3	11.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

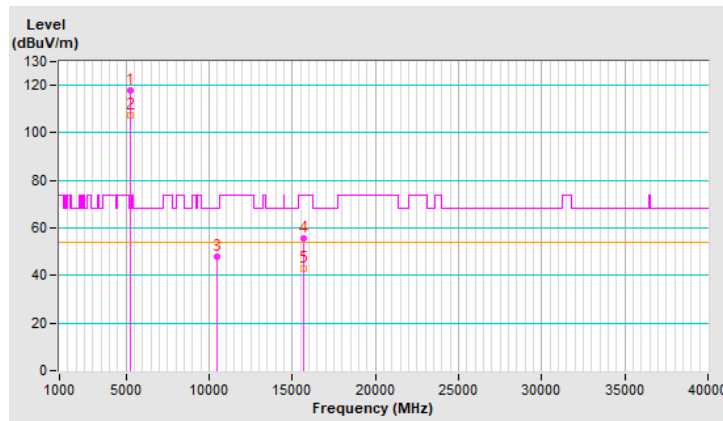


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	107.3 PK			1.03 H	241	105.5	1.8
2	*5260.00	97.3 AV			1.03 H	241	95.5	1.8
3	#10520.00	55.9 PK	68.2	-12.3	1.63 H	267	43.9	12.0
4	15780.00	54.0 PK	74.0	-20.0	1.30 H	310	42.5	11.5
5	15780.00	41.1 AV	54.0	-12.9	1.30 H	310	29.6	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

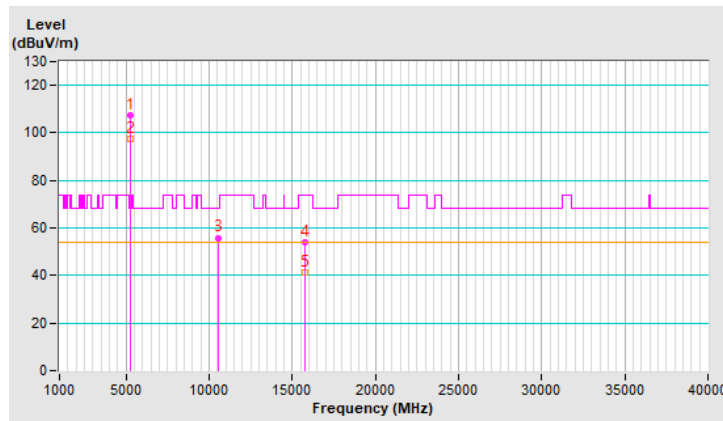


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	118.3 PK			1.23 V	273	116.5	1.8
2	*5260.00	107.7 AV			1.23 V	273	105.9	1.8
3	#10520.00	47.8 PK	68.2	-20.4	1.69 V	277	35.8	12.0
4	15780.00	55.7 PK	74.0	-18.3	2.32 V	255	44.2	11.5
5	15780.00	42.9 AV	54.0	-11.1	2.32 V	255	31.4	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

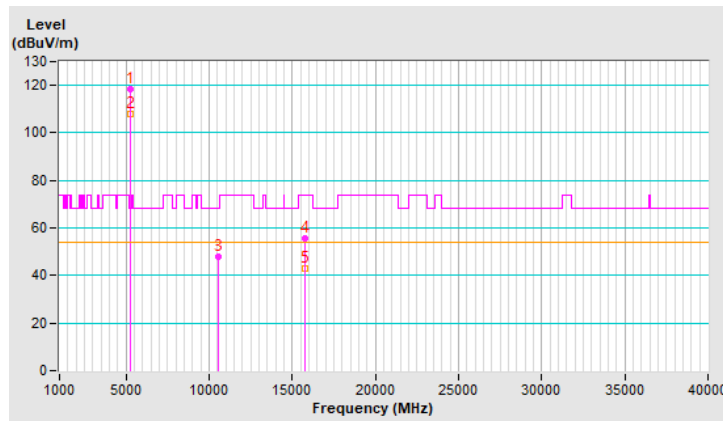


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	108.0 PK			1.03 H	235	106.3	1.7
2	*5300.00	98.1 AV			1.03 H	235	96.4	1.7
3	10600.00	56.0 PK	74.0	-18.0	1.62 H	252	44.3	11.7
4	10600.00	42.5 AV	54.0	-11.5	1.62 H	252	30.8	11.7
5	15900.00	54.1 PK	74.0	-19.9	1.39 H	292	43.0	11.1
6	15900.00	41.1 AV	54.0	-12.9	1.39 H	292	30.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

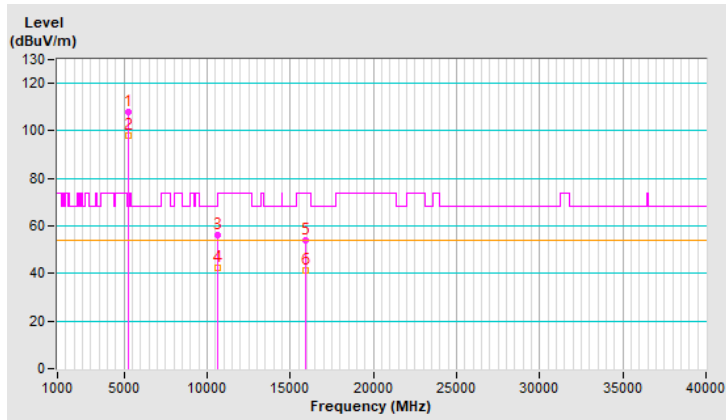




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	117.9 PK			1.25 V	246	116.2	1.7
2	*5300.00	107.4 AV			1.25 V	246	105.7	1.7
3	10600.00	48.0 PK	74.0	-26.0	1.64 V	274	36.3	11.7
4	10600.00	37.2 AV	54.0	-16.8	1.64 V	274	25.5	11.7
5	15900.00	56.1 PK	74.0	-17.9	2.30 V	270	45.0	11.1
6	15900.00	43.6 AV	54.0	-10.4	2.30 V	270	32.5	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

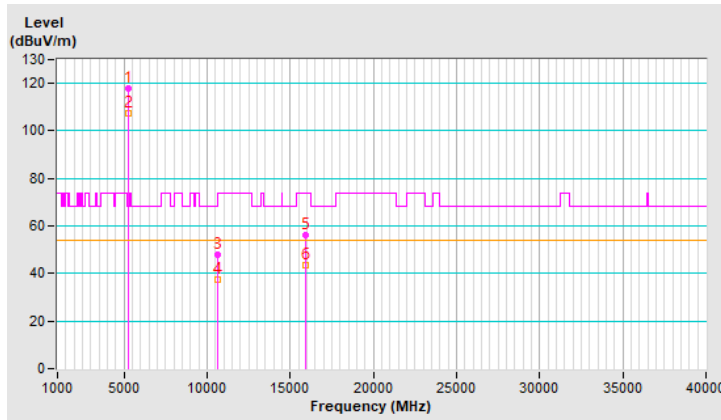


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	107.6 PK			1.03 H	237	105.9	1.7
2	*5320.00	97.7 AV			1.03 H	237	96.0	1.7
3	5350.00	62.4 PK	74.0	-11.6	1.03 H	237	60.4	2.0
4	5350.00	39.3 AV	54.0	-14.7	1.03 H	237	37.3	2.0
5	10640.00	56.4 PK	74.0	-17.6	1.63 H	244	44.8	11.6
6	10640.00	42.5 AV	54.0	-11.5	1.63 H	244	30.9	11.6
7	15960.00	53.7 PK	74.0	-20.3	1.38 H	296	42.3	11.4
8	15960.00	40.9 AV	54.0	-13.1	1.38 H	296	29.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

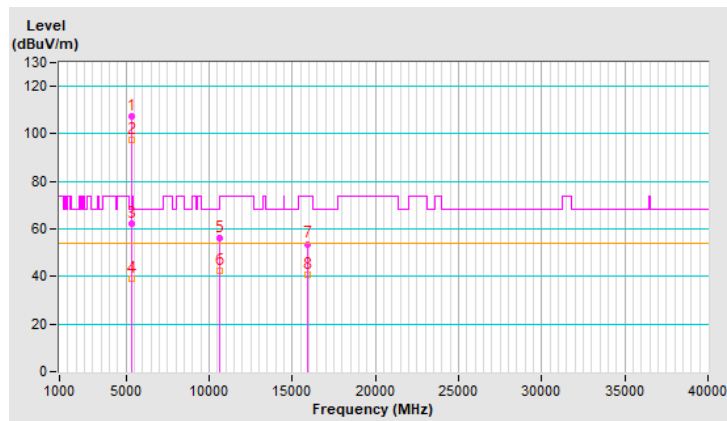


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.0 PK			1.46 V	263	116.3	1.7
2	*5320.00	107.4 AV			1.46 V	263	105.7	1.7
3	5350.00	66.6 PK	74.0	-7.4	1.46 V	263	64.6	2.0
4	5350.00	43.1 AV	54.0	-10.9	1.46 V	263	41.1	2.0
5	10640.00	47.9 PK	74.0	-26.1	1.69 V	284	36.3	11.6
6	10640.00	36.9 AV	54.0	-17.1	1.69 V	284	25.3	11.6
7	15960.00	55.6 PK	74.0	-18.4	2.32 V	263	44.2	11.4
8	15960.00	42.9 AV	54.0	-11.1	2.32 V	263	31.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

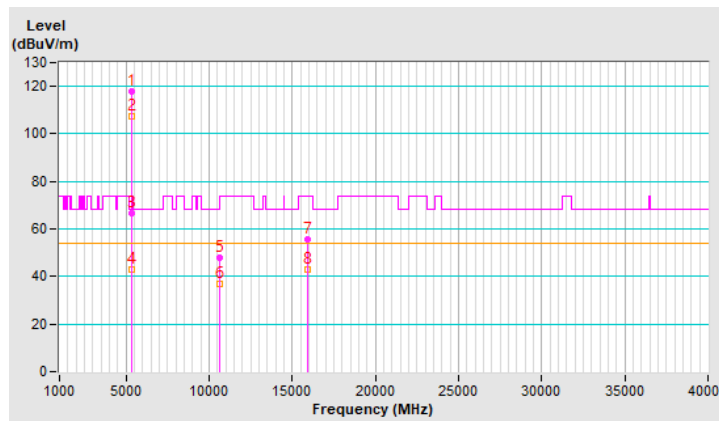


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	48.8 PK	74.0	-25.2	1.02 H	225	46.6	2.2
2	5460.00	38.3 AV	54.0	-15.7	1.02 H	225	36.1	2.2
3	#5465.86	54.6 PK	68.2	-13.6	1.02 H	225	52.4	2.2
4	*5500.00	106.0 PK			1.02 H	225	103.9	2.1
5	*5500.00	95.1 AV			1.02 H	225	93.0	2.1
6	11000.00	55.6 PK	74.0	-18.4	1.60 H	265	43.5	12.1
7	11000.00	42.2 AV	54.0	-11.8	1.60 H	265	30.1	12.1
8	#16500.00	52.9 PK	68.2	-15.3	1.40 H	301	39.5	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

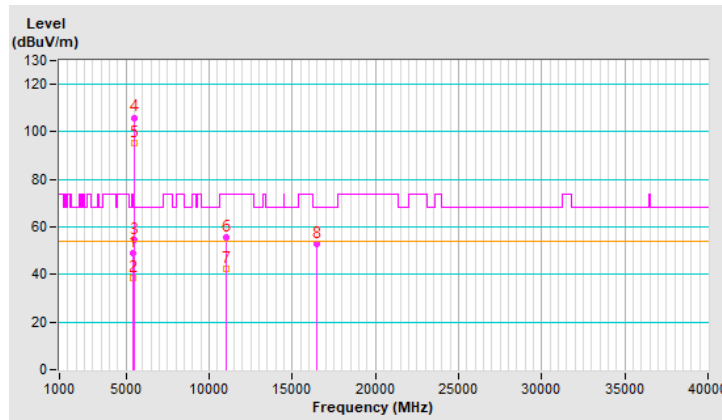


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5458.00	52.1 PK	74.0	-21.9	1.28 V	273	49.9	2.2
2	5458.00	41.8 AV	54.0	-12.2	1.28 V	273	39.6	2.2
3	#5470.00	66.2 PK	68.2	-2.0	1.28 V	273	64.0	2.2
4	*5500.00	116.2 PK			1.28 V	273	114.1	2.1
5	*5500.00	105.2 AV			1.28 V	273	103.1	2.1
6	11000.00	48.5 PK	74.0	-25.5	1.73 V	282	36.4	12.1
7	11000.00	37.3 AV	54.0	-16.7	1.73 V	282	25.2	12.1
8	#16500.00	55.6 PK	68.2	-12.6	2.29 V	272	42.2	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

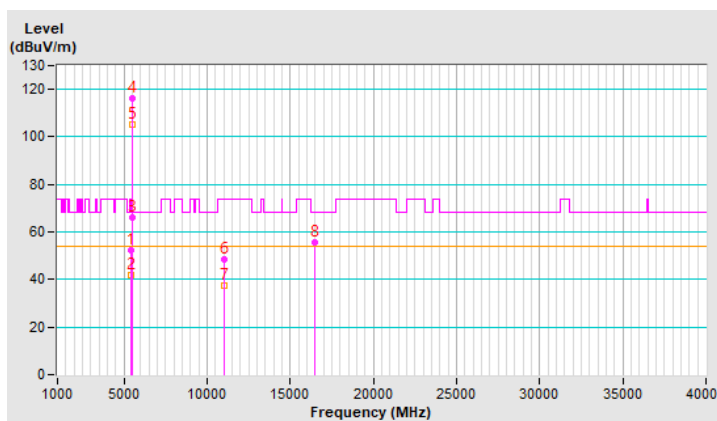




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5580.00	107.8 PK			1.01 H	243	105.6	2.2
2	*5580.00	98.1 AV			1.01 H	243	95.9	2.2
3	11160.00	55.3 PK	74.0	-18.7	1.55 H	250	43.4	11.9
4	11160.00	41.8 AV	54.0	-12.2	1.55 H	250	29.9	11.9
5	#16740.00	53.6 PK	68.2	-14.6	1.33 H	298	38.4	15.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

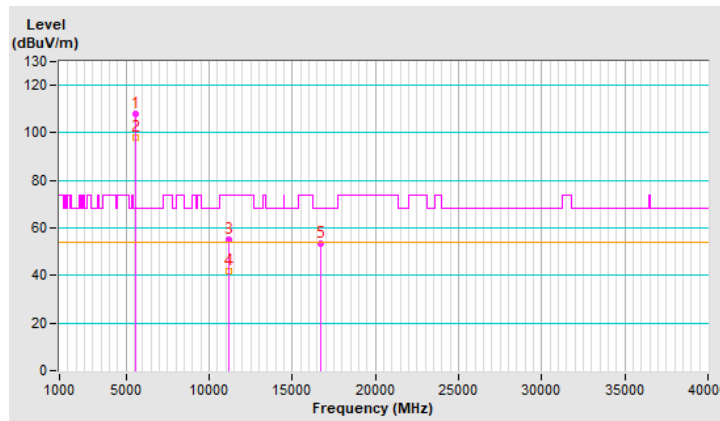


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	117.8 PK			1.21 V	257	115.6	2.2
2	*5580.00	107.3 AV			1.21 V	257	105.1	2.2
3	11160.00	47.9 PK	74.0	-26.1	1.65 V	281	36.0	11.9
4	11160.00	37.3 AV	54.0	-16.7	1.65 V	281	25.4	11.9
5	#16740.00	56.4 PK	68.2	-11.8	2.31 V	266	41.2	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

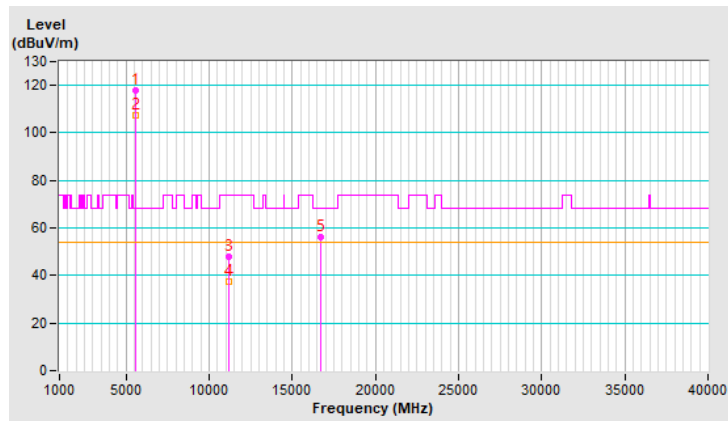


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	106.8 PK			1.14 H	219	104.5	2.3
2	*5700.00	95.9 AV			1.14 H	219	93.6	2.3
3	#5725.00	62.3 PK	68.2	-5.9	1.14 H	219	59.8	2.5
4	11400.00	55.7 PK	74.0	-18.3	1.53 H	244	43.5	12.2
5	11400.00	42.4 AV	54.0	-11.6	1.53 H	244	30.2	12.2
6	#17100.00	54.3 PK	68.2	-13.9	1.40 H	303	37.7	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

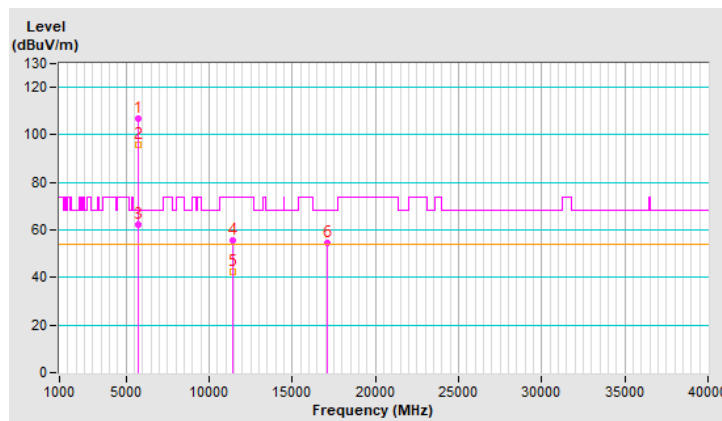


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	114.9 PK			1.28 V	258	112.6	2.3
2	*5700.00	104.6 AV			1.28 V	258	102.3	2.3
3	#5725.00	66.5 PK	68.2	-1.7	1.28 V	258	64.0	2.5
4	11400.00	48.3 PK	74.0	-25.7	1.68 V	278	36.1	12.2
5	11400.00	37.4 AV	54.0	-16.6	1.68 V	278	25.2	12.2
6	#17100.00	55.6 PK	68.2	-12.6	2.30 V	249	39.0	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

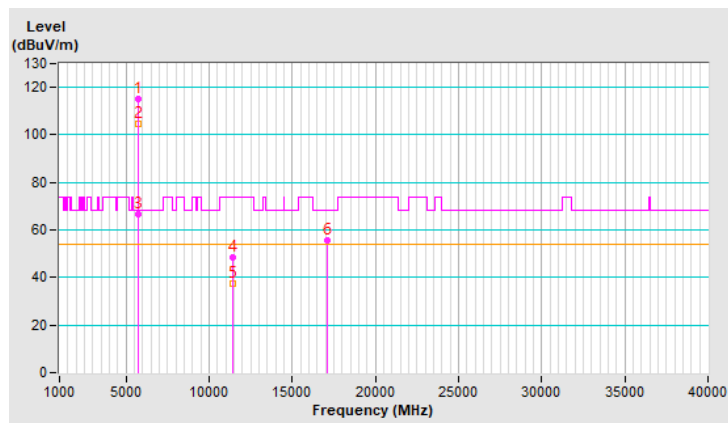


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	5460.00	51.8 PK	74.0	-22.2	1.11 H	225	49.6	2.2
2	5460.00	41.2 AV	54.0	-12.8	1.11 H	225	39.0	2.2
3	#5470.00	54.9 PK	68.2	-13.3	1.11 H	225	52.7	2.2
4	*5720.00	109.0 PK			1.11 H	225	106.6	2.4
5	*5720.00	98.6 AV			1.11 H	225	96.2	2.4
6	#5850.00	54.3 PK	68.2	-13.9	1.11 H	225	51.4	2.9
7	11440.00	55.7 PK	74.0	-18.3	1.52 H	268	43.5	12.2
8	11440.00	41.9 AV	54.0	-12.1	1.52 H	268	29.7	12.2
9	#17160.00	53.5 PK	68.2	-14.7	1.35 H	311	37.0	16.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

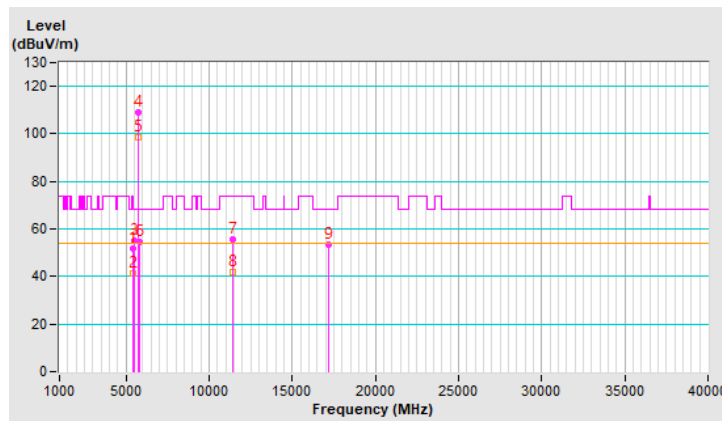


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.3 PK	74.0	-21.7	1.29 V	246	50.1	2.2
2	5460.00	41.5 AV	54.0	-12.5	1.29 V	246	39.3	2.2
3	#5470.00	54.7 PK	68.2	-13.5	1.29 V	246	52.5	2.2
4	*5720.00	118.1 PK			1.29 V	246	115.7	2.4
5	*5720.00	107.6 AV			1.29 V	246	105.2	2.4
6	#5850.00	54.8 PK	68.2	-13.4	1.29 V	246	51.9	2.9
7	11440.00	47.9 PK	74.0	-26.1	1.69 V	280	35.7	12.2
8	11440.00	37.1 AV	54.0	-16.9	1.69 V	280	24.9	12.2
9	#17160.00	56.1 PK	68.2	-12.1	2.35 V	255	39.6	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

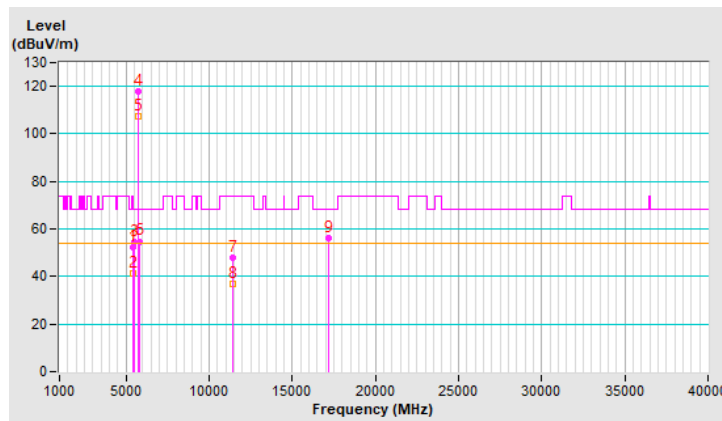


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5568.19	50.3 PK	68.2	-17.9	1.14 H	223	48.1	2.2
2	*5745.00	108.9 PK			1.14 H	223	106.4	2.5
3	*5745.00	98.2 AV			1.14 H	223	95.7	2.5
4	#5982.12	51.1 PK	68.2	-17.1	1.14 H	223	48.2	2.9
5	11490.00	55.5 PK	74.0	-18.5	1.63 H	260	43.1	12.4
6	11490.00	41.8 AV	54.0	-12.2	1.63 H	260	29.4	12.4
7	#17235.00	53.3 PK	68.2	-14.9	1.36 H	284	36.6	16.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

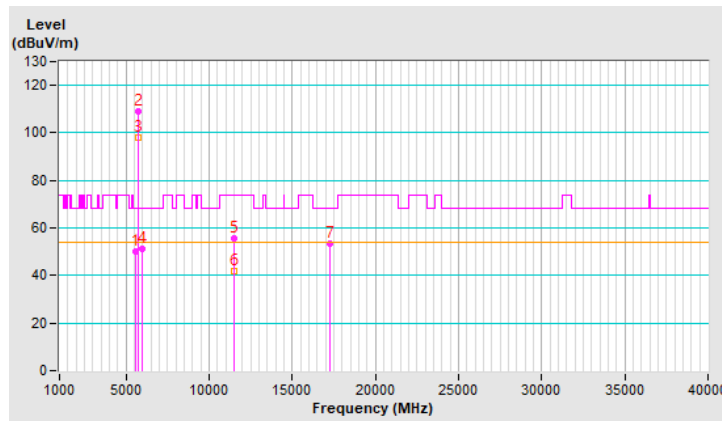


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5601.22	51.2 PK	68.2	-17.0	1.26 V	260	49.0	2.2
2	*5745.00	118.0 PK			1.26 V	260	115.5	2.5
3	*5745.00	107.5 AV			1.26 V	260	105.0	2.5
4	#5971.99	51.6 PK	68.2	-16.6	1.26 V	260	48.7	2.9
5	11490.00	48.3 PK	74.0	-25.7	1.73 V	276	35.9	12.4
6	11490.00	37.2 AV	54.0	-16.8	1.73 V	276	24.8	12.4
7	#17235.00	55.6 PK	68.2	-12.6	2.26 V	269	38.9	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

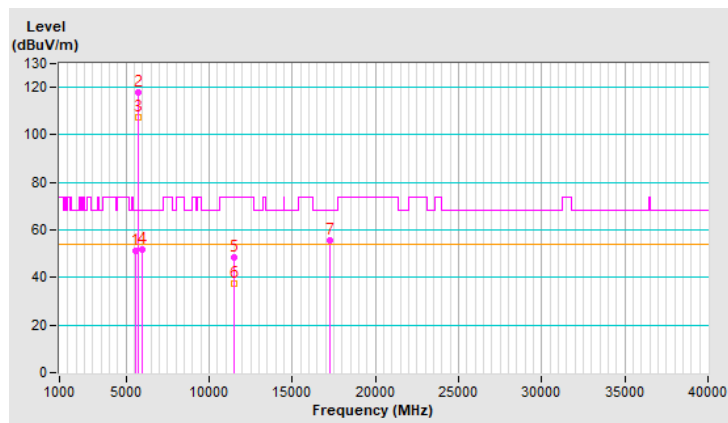


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5593.58	50.6 PK	68.2	-17.6	1.12 H	222	48.4	2.2
2	*5785.00	109.1 PK			1.12 H	222	106.4	2.7
3	*5785.00	98.9 AV			1.12 H	222	96.2	2.7
4	#5976.16	50.8 PK	68.2	-17.4	1.12 H	222	47.9	2.9
5	11570.00	55.5 PK	74.0	-18.5	1.59 H	268	43.1	12.4
6	11570.00	42.2 AV	54.0	-11.8	1.59 H	268	29.8	12.4
7	#17355.00	53.6 PK	68.2	-14.6	1.36 H	290	36.0	17.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

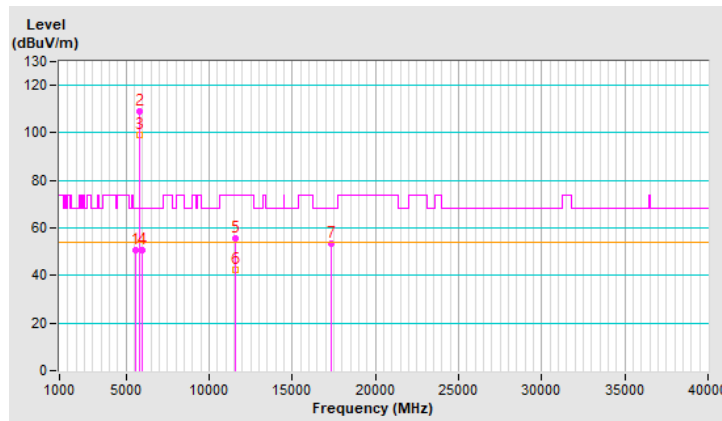




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5576.97	51.9 PK	68.2	-16.3	1.29 V	244	49.7	2.2
2	*5785.00	117.8 PK			1.29 V	244	115.1	2.7
3	*5785.00	107.3 AV			1.29 V	244	104.6	2.7
4	#5983.57	52.2 PK	68.2	-16.0	1.29 V	244	49.3	2.9
5	11570.00	48.1 PK	74.0	-25.9	1.71 V	282	35.7	12.4
6	11570.00	37.2 AV	54.0	-16.8	1.71 V	282	24.8	12.4
7	#17355.00	56.3 PK	68.2	-11.9	2.25 V	264	38.7	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

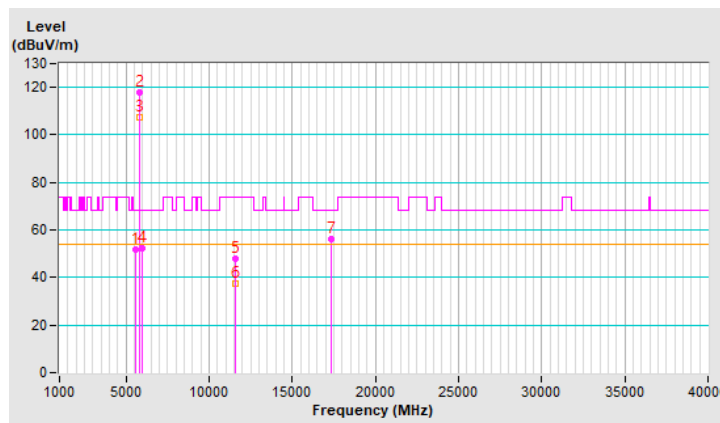


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5621.86	49.8 PK	68.2	-18.4	1.05 H	224	47.6	2.2
2	*5825.00	108.7 PK			1.05 H	224	105.9	2.8
3	*5825.00	98.4 AV			1.05 H	224	95.6	2.8
4	#5965.14	50.8 PK	68.2	-17.4	1.05 H	224	47.9	2.9
5	11650.00	56.0 PK	74.0	-18.0	1.57 H	250	44.1	11.9
6	11650.00	42.5 AV	54.0	-11.5	1.57 H	250	30.6	11.9
7	#17475.00	53.2 PK	68.2	-15.0	1.38 H	297	34.7	18.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

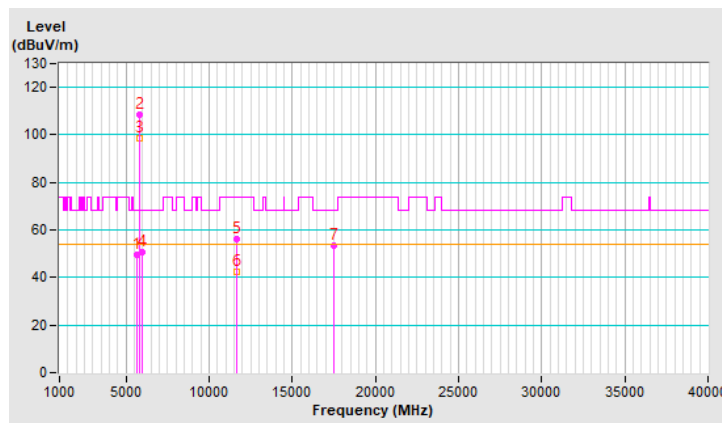


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5611.05	51.9 PK	68.2	-16.3	1.27 V	257	49.7	2.2
2	*5825.00	118.4 PK			1.27 V	257	115.6	2.8
3	*5825.00	108.1 AV			1.27 V	257	105.3	2.8
4	#5950.21	51.0 PK	68.2	-17.2	1.27 V	257	48.1	2.9
5	11650.00	47.9 PK	74.0	-26.1	1.66 V	267	36.0	11.9
6	11650.00	37.1 AV	54.0	-16.9	1.66 V	267	25.2	11.9
7	#17475.00	55.7 PK	68.2	-12.5	2.27 V	251	37.2	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

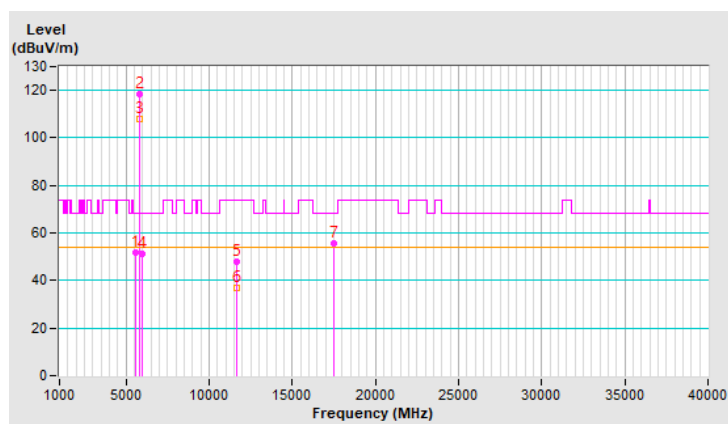


Mode A_Plot of Band Edge

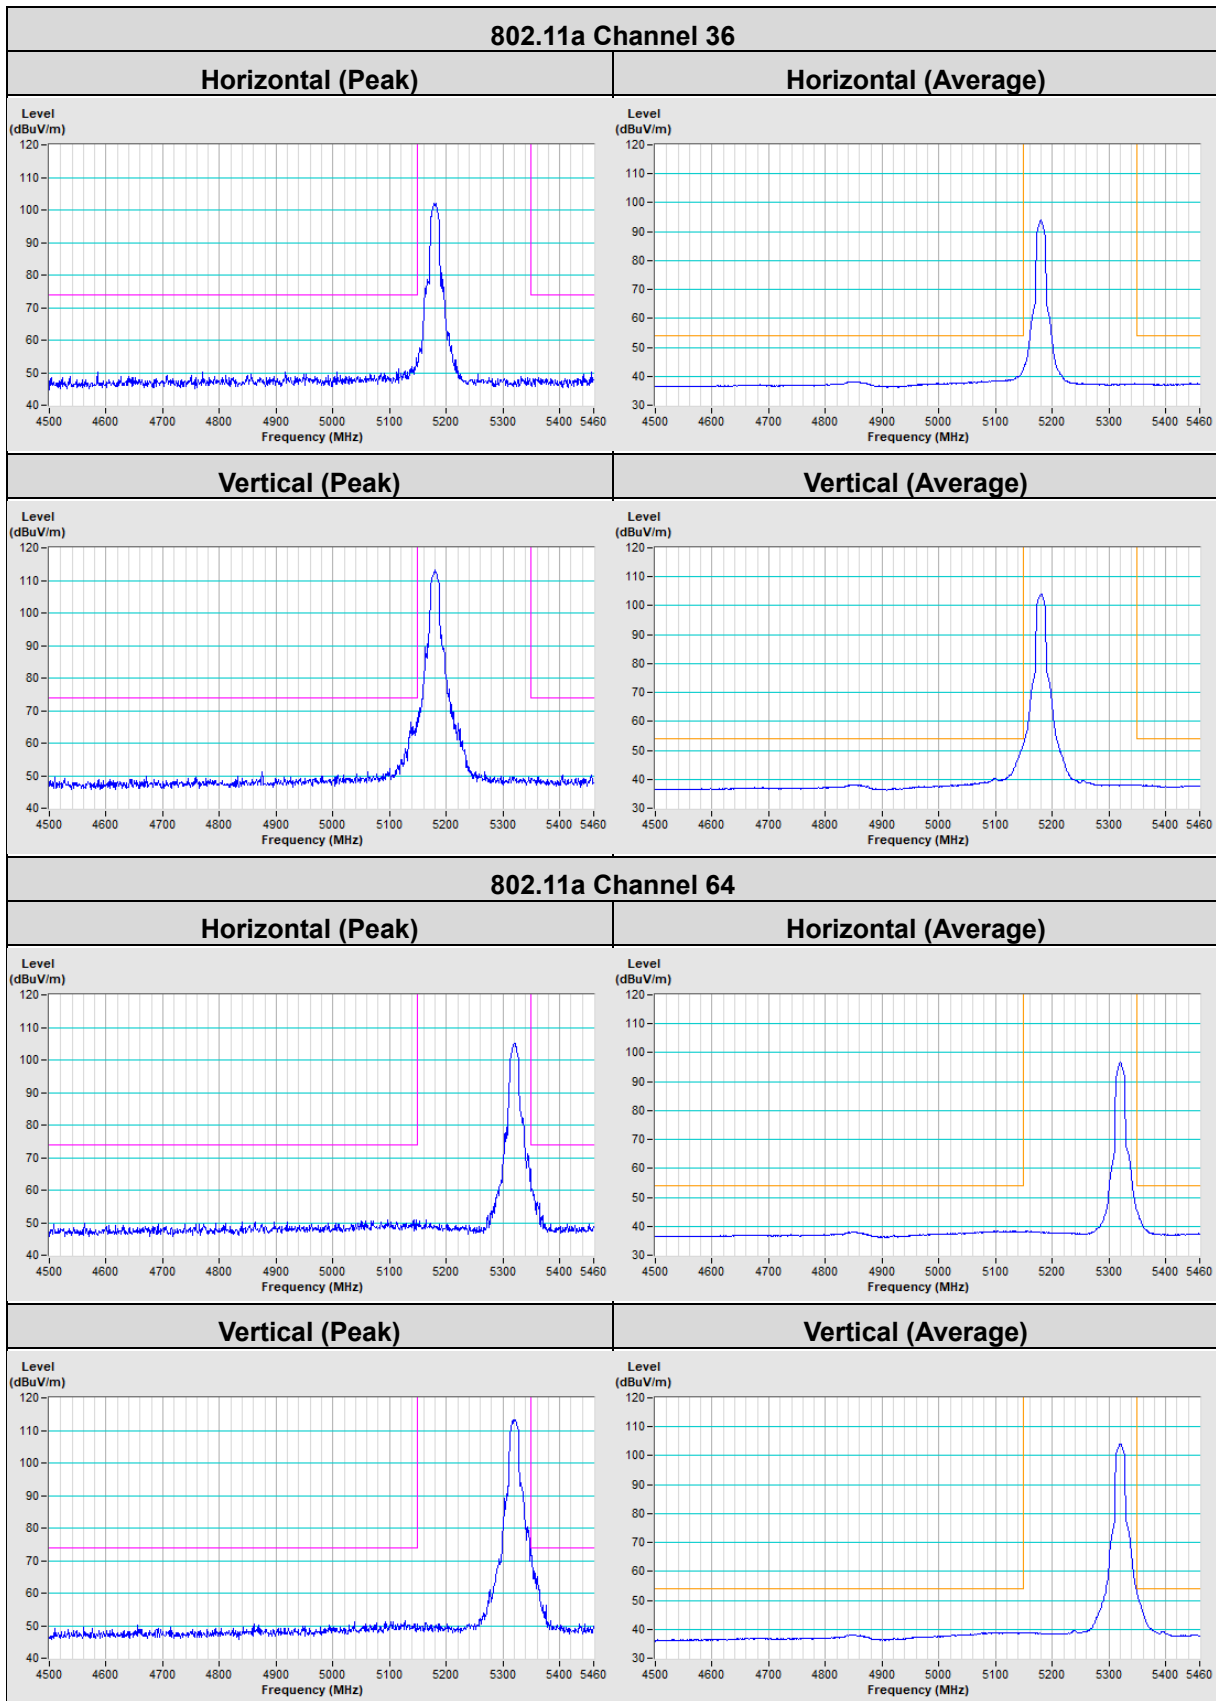


802.11a Channel 100

Horizontal (Peak) **Horizontal (Average)**

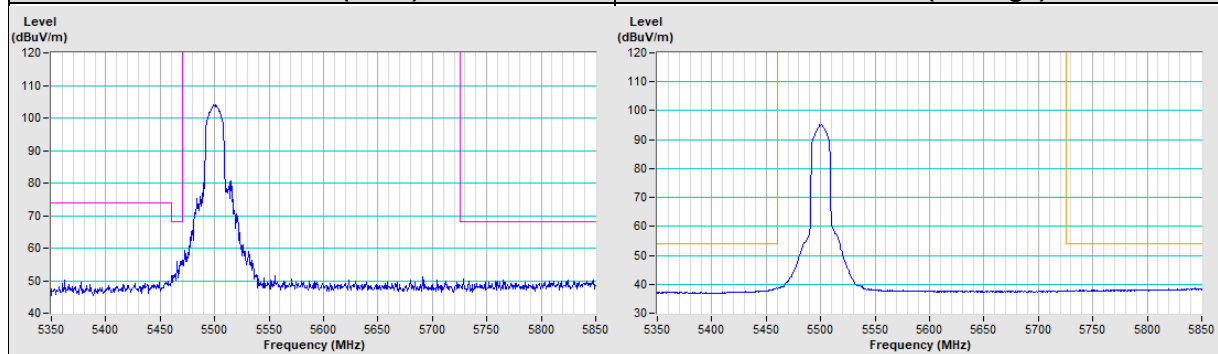


Vertical (Peak) **Vertical (Average)**

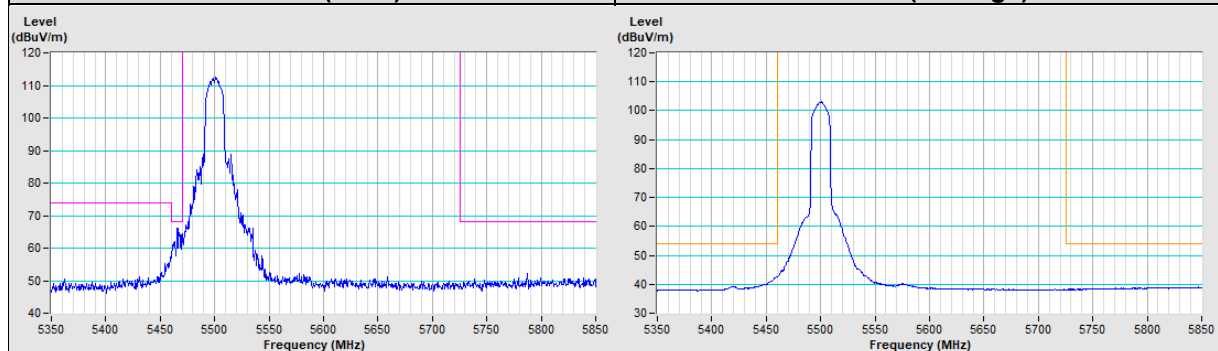


802.11a Channel 149

Horizontal (Peak) **Vertical (Peak)**

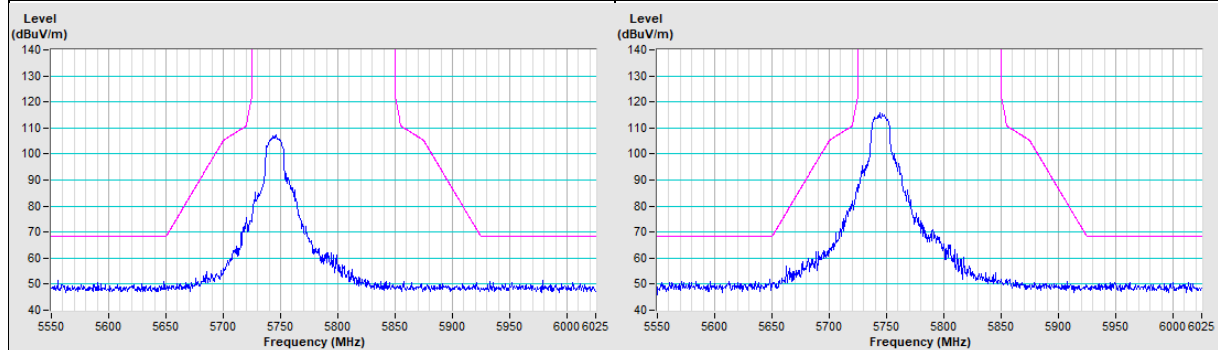

802.11a Channel 157



Horizontal (Peak) **Vertical (Peak)**

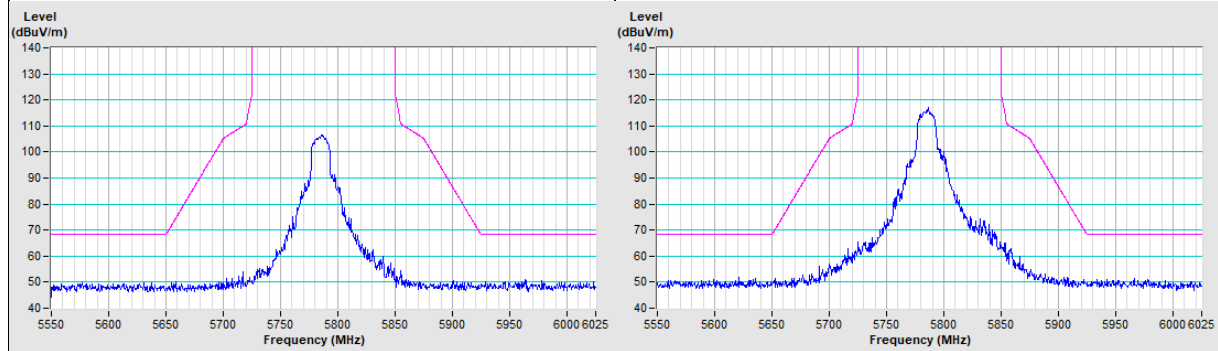

802.11a Channel 165


Horizontal (Peak)

Vertical (Peak)

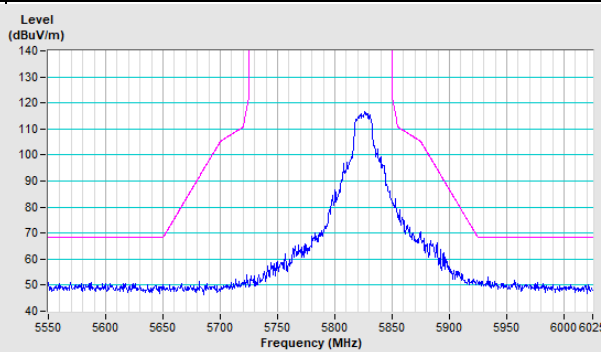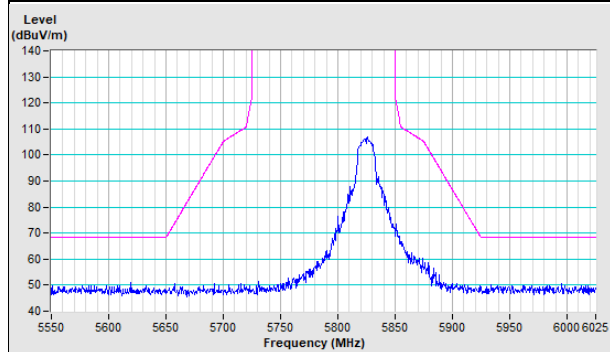


802.11ax (HE20) Channel 36

Horizontal (Peak) **Horizontal (Average)**

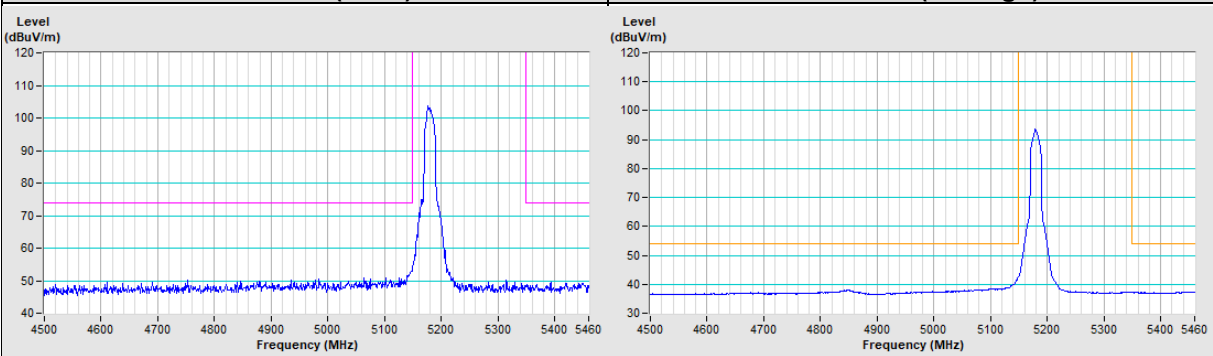


Vertical (Peak) **Vertical (Average)**

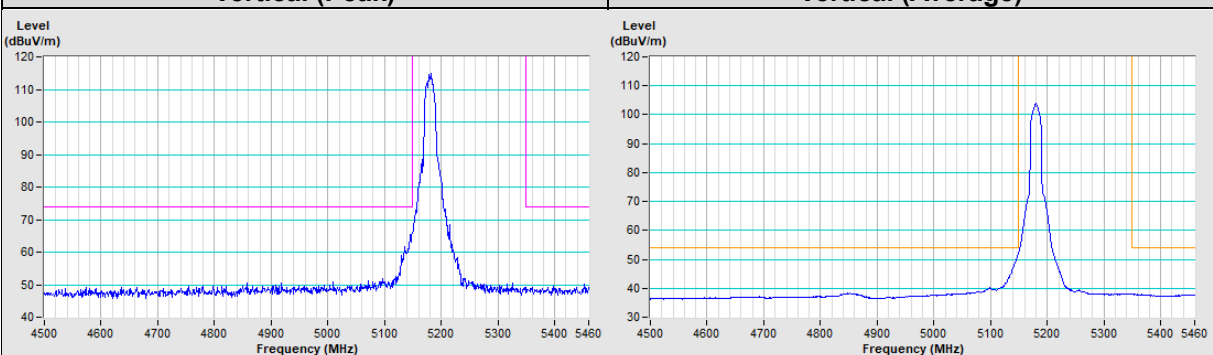


802.11ax (HE20) Channel 64

Horizontal (Peak) **Horizontal (Average)**

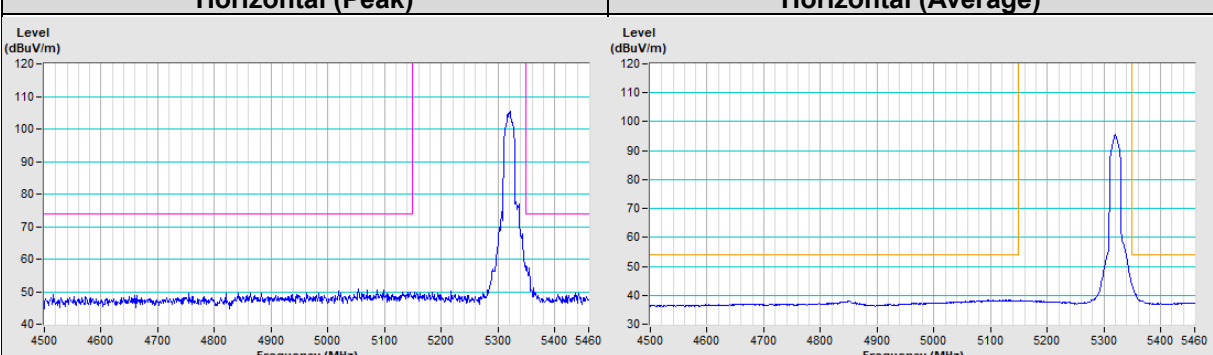


Vertical (Peak) **Vertical (Average)**

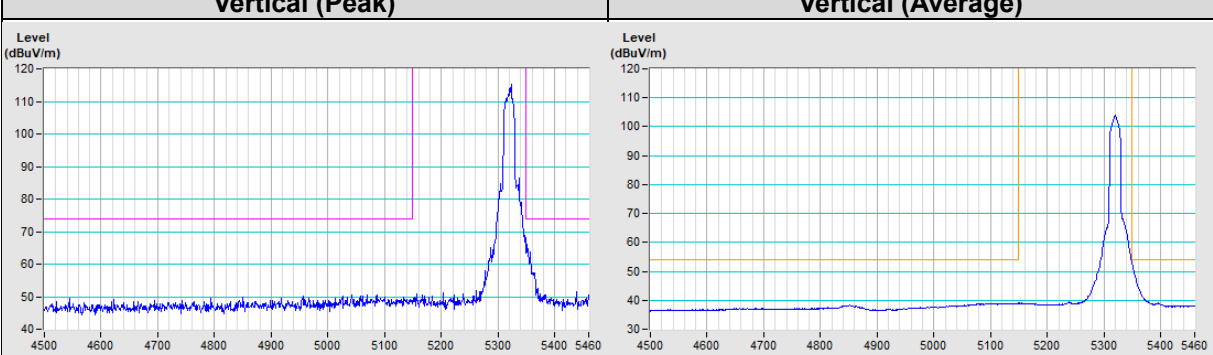


802.11ax (HE20) Channel 100

Horizontal (Peak) **Horizontal (Average)**

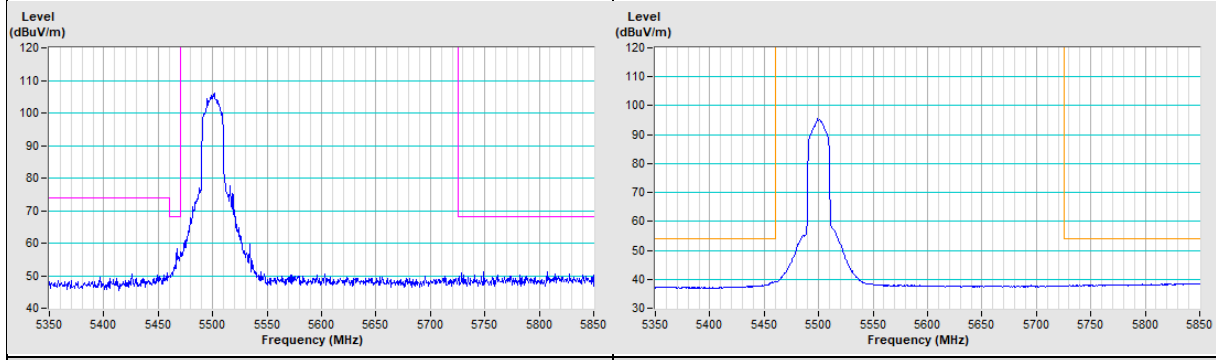


Vertical (Peak) **Vertical (Average)**

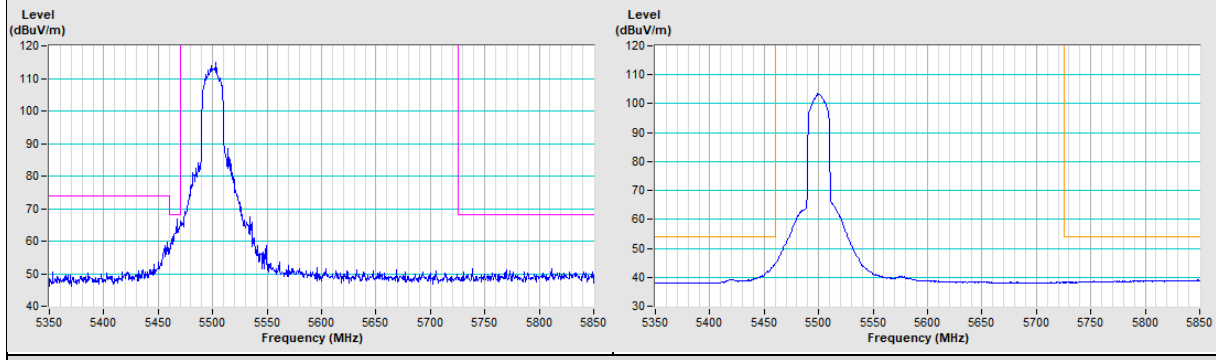


802.11ax (HE20) Channel 149


Horizontal (Peak) **Vertical (Peak)**

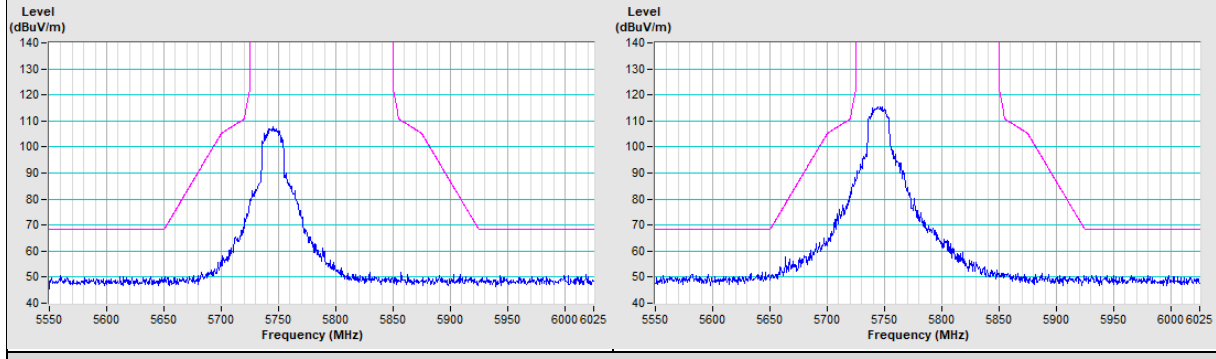

802.11ax (HE20) Channel 157



Horizontal (Peak) **Vertical (Peak)**

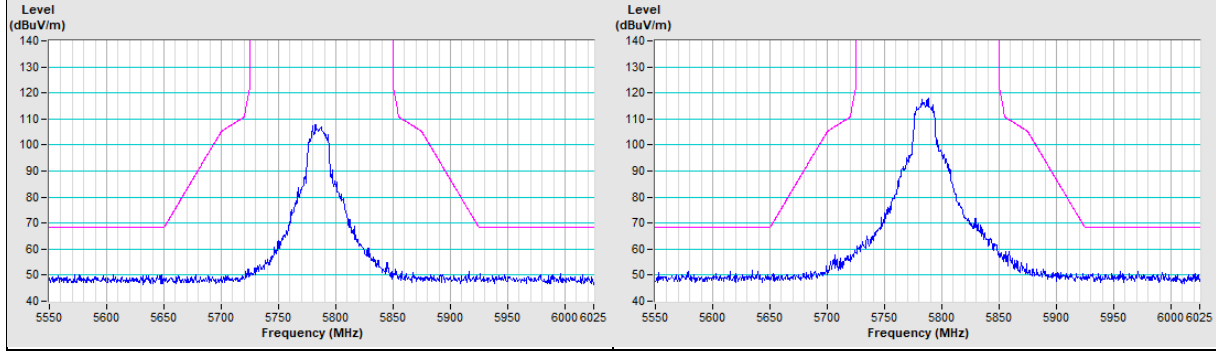

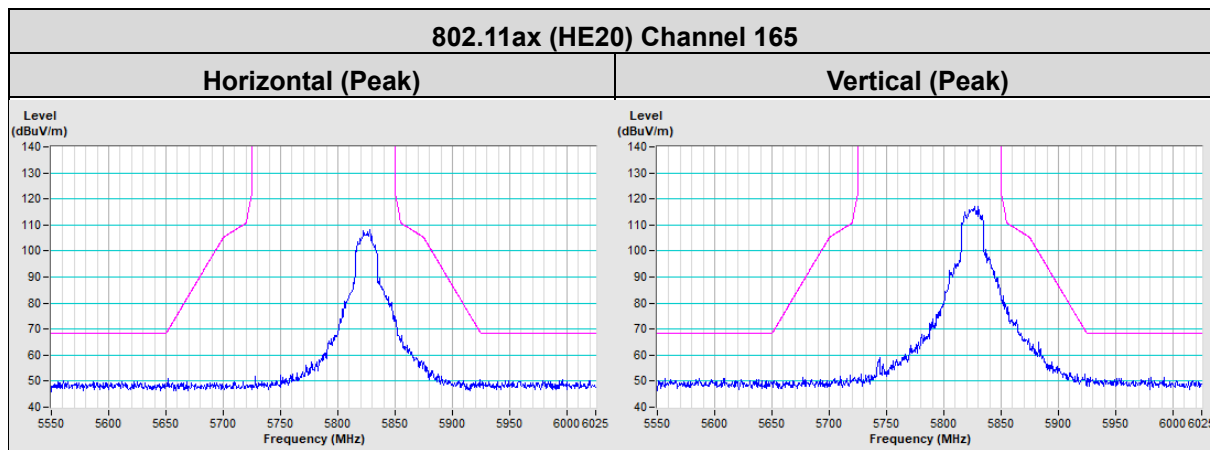



802.11ax (HE40) Channel 38

Horizontal (Peak) **Horizontal (Average)**

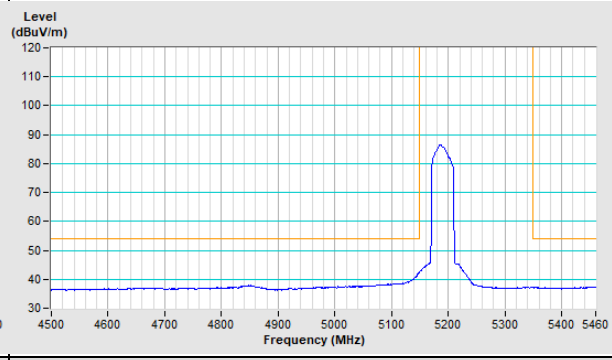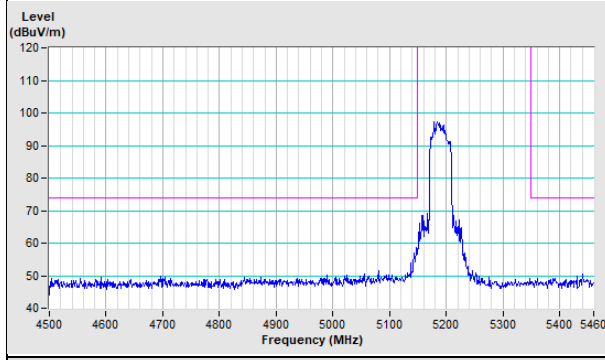



Vertical (Peak)

Vertical (Average)

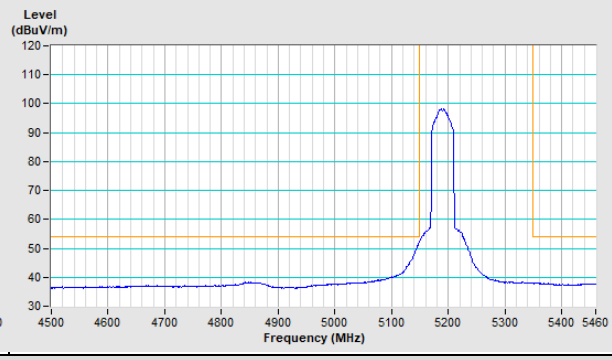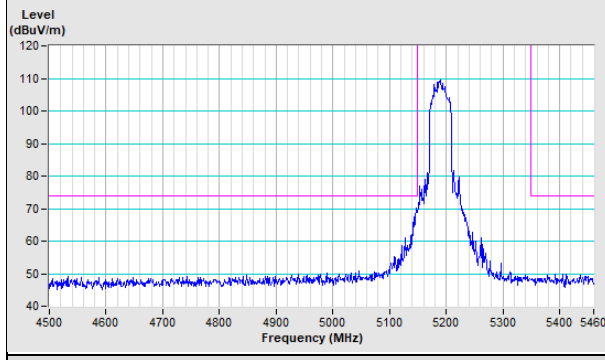



802.11ax (HE40) Channel 62

Horizontal (Peak) **Horizontal (Average)**

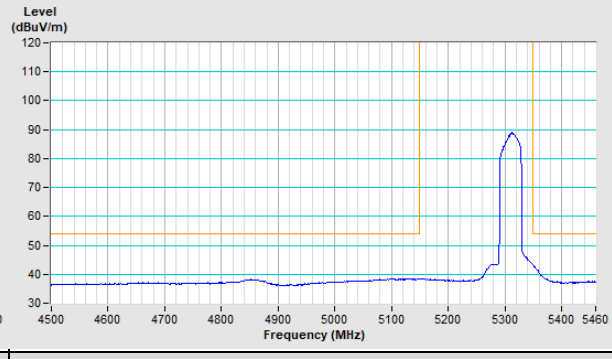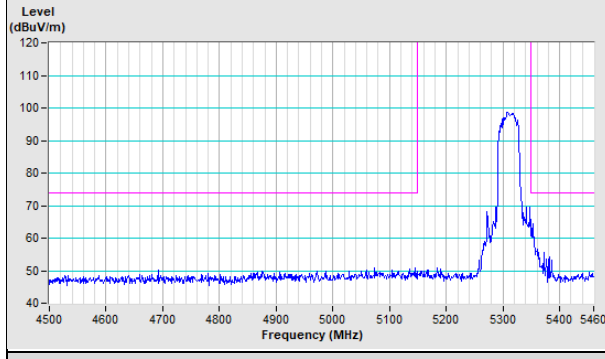


Vertical (Peak)

Vertical (Average)

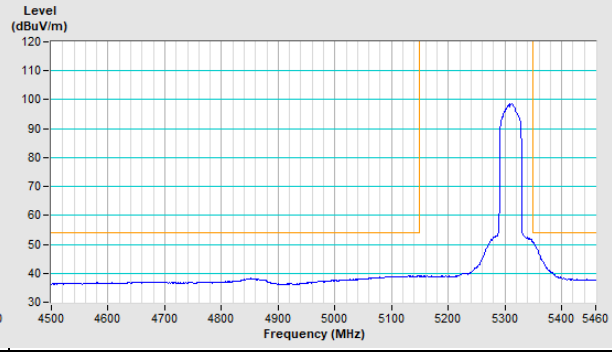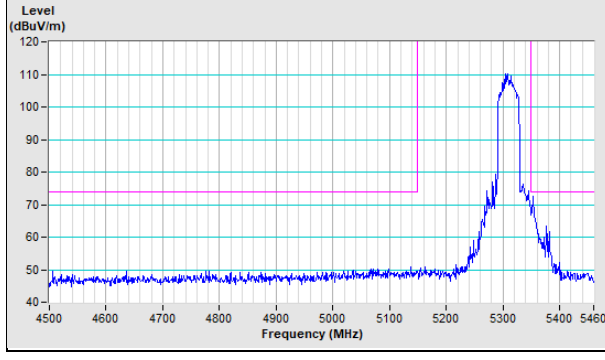


802.11ax (HE40) Channel 102

Horizontal (Peak) **Horizontal (Average)**

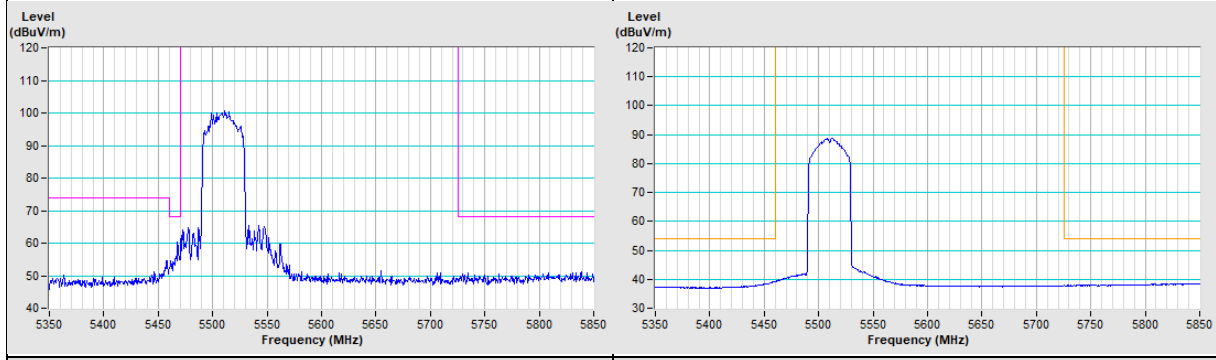


Vertical (Peak) **Vertical (Average)**

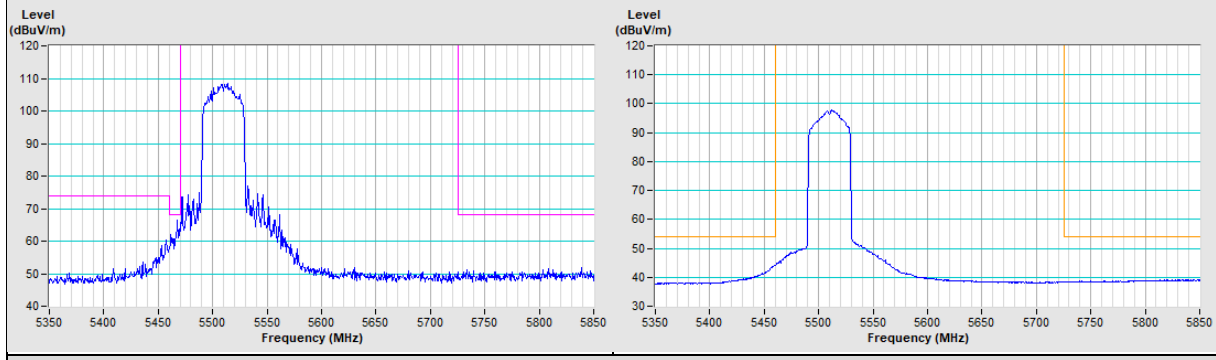


802.11ax (HE40) Channel 151

Horizontal (Peak) **Vertical (Peak)**

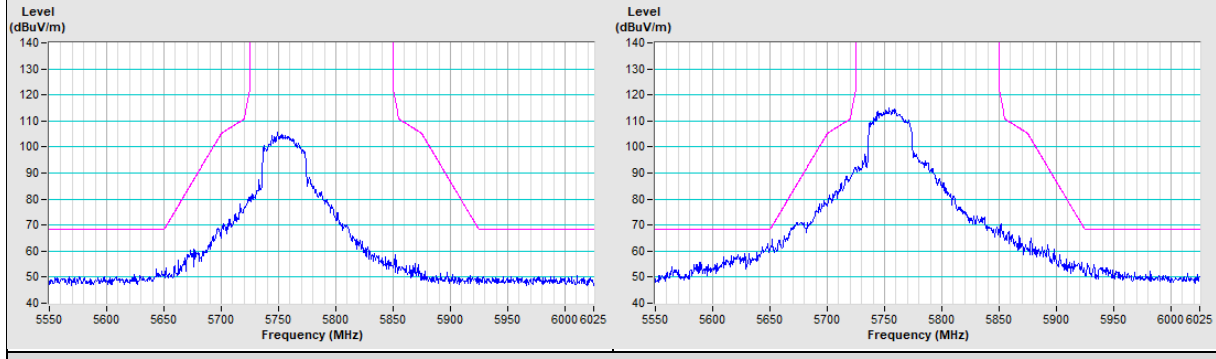



802.11ax (HE40) Channel 159

Horizontal (Peak) **Vertical (Peak)**

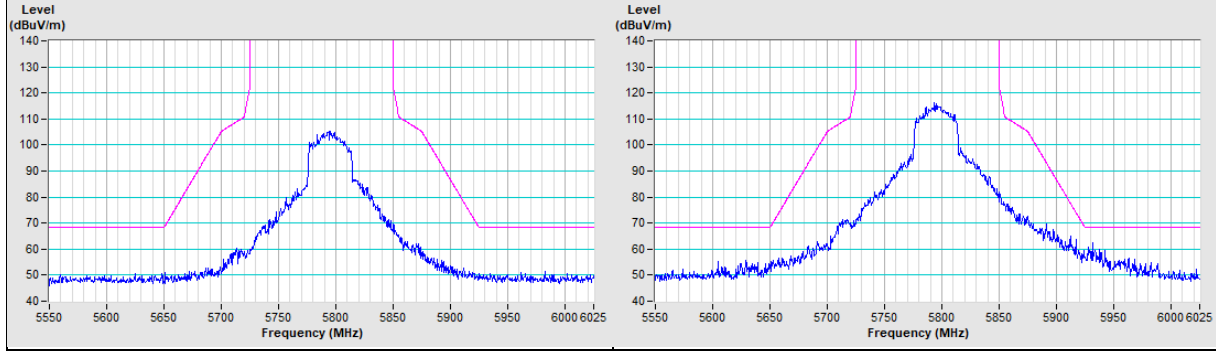


802.11ax (HE80) Channel 42


Horizontal (Peak) **Horizontal (Average)**

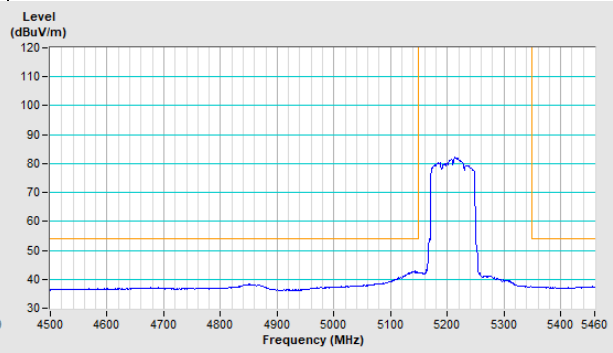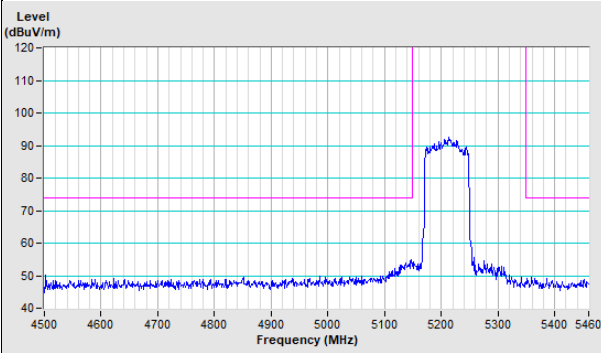

Vertical (Peak)


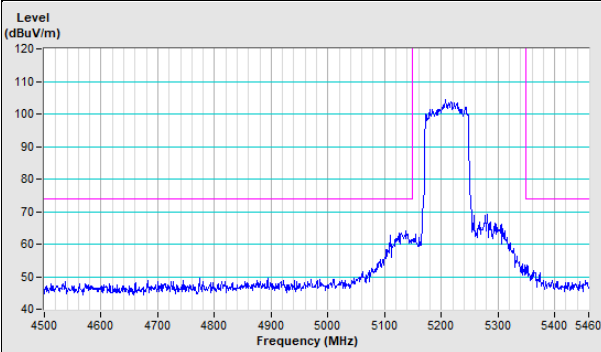


Vertical (Average)

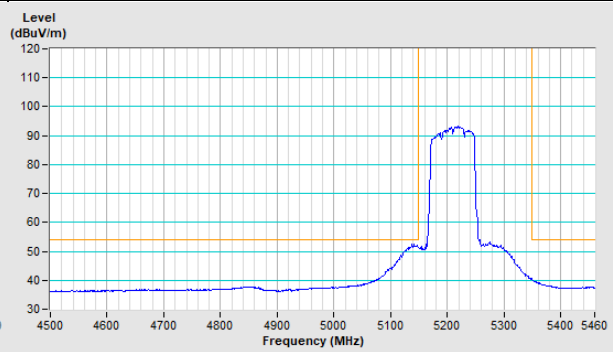


802.11ax (HE80) Channel 58


Horizontal (Peak) **Horizontal (Average)**

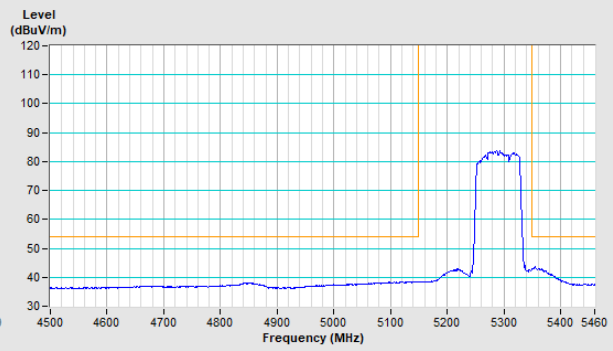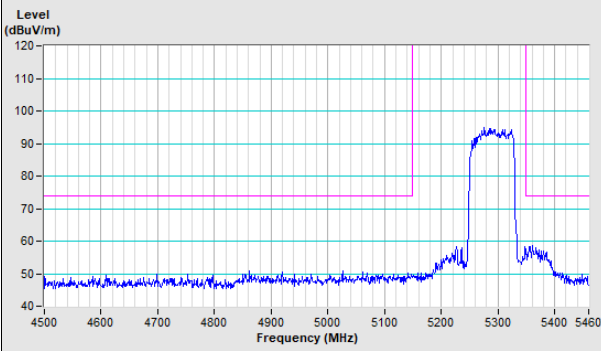

Vertical (Peak)

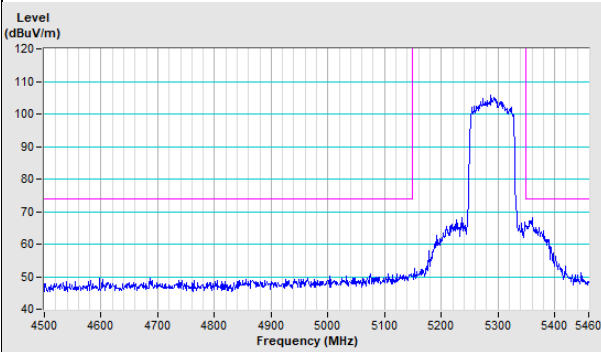


Vertical (Average)

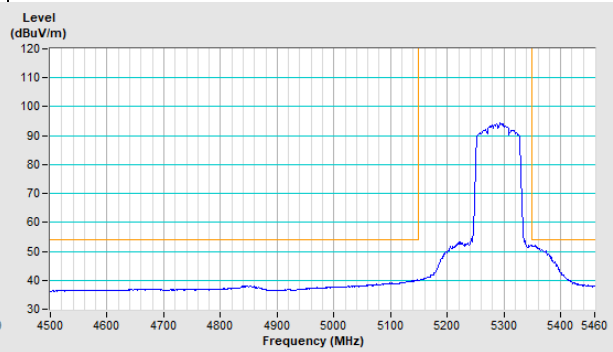


802.11ax (HE80) Channel 106

Horizontal (Peak) **Horizontal (Average)**

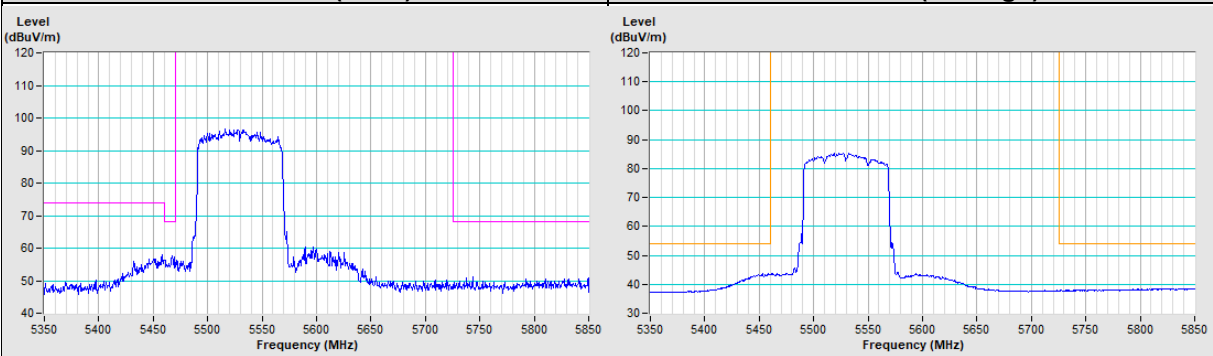


Vertical (Peak) **Vertical (Average)**

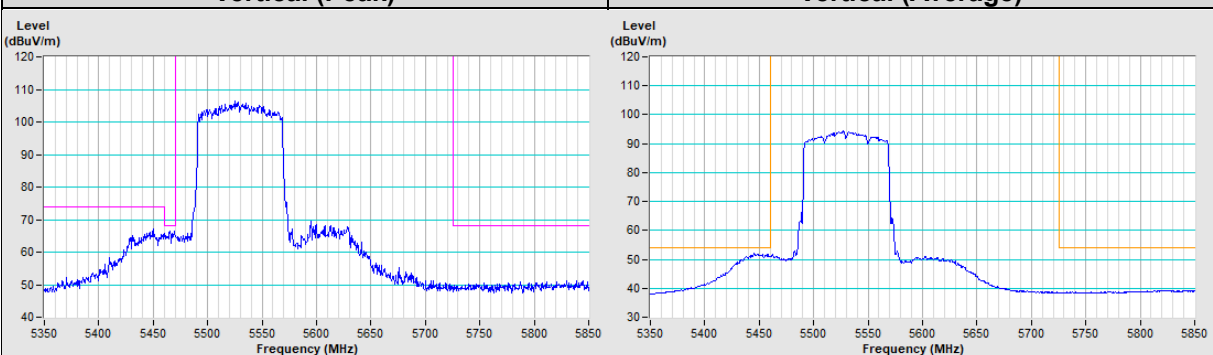


802.11ax (HE80) Channel 155

Horizontal (Peak) **Vertical (Peak)**

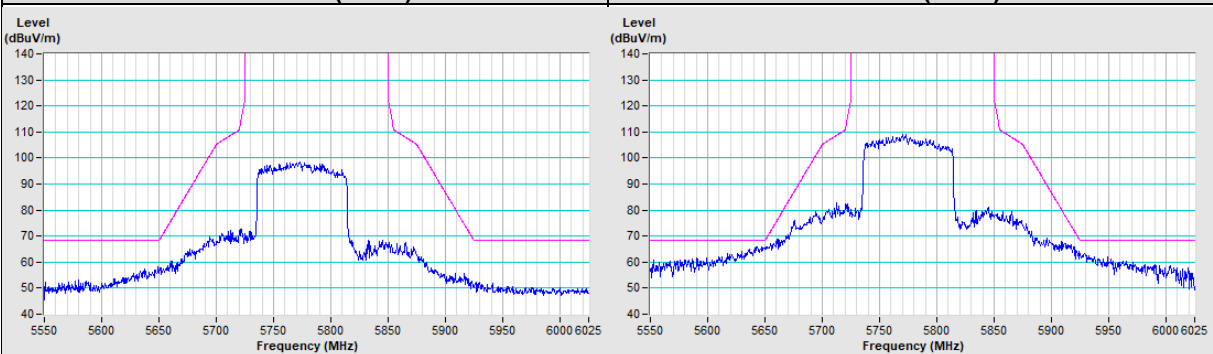


20 MHz Preamble 802.11ax (RU26) Channel 36

Horizontal (Peak)	Horizontal (Average)
--------------------------	-----------------------------

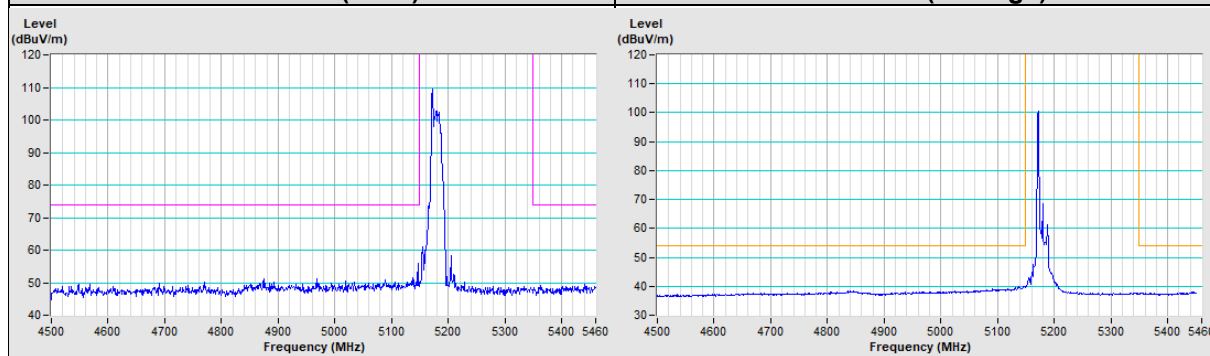


Vertical (Peak)	Vertical (Average)
------------------------	---------------------------

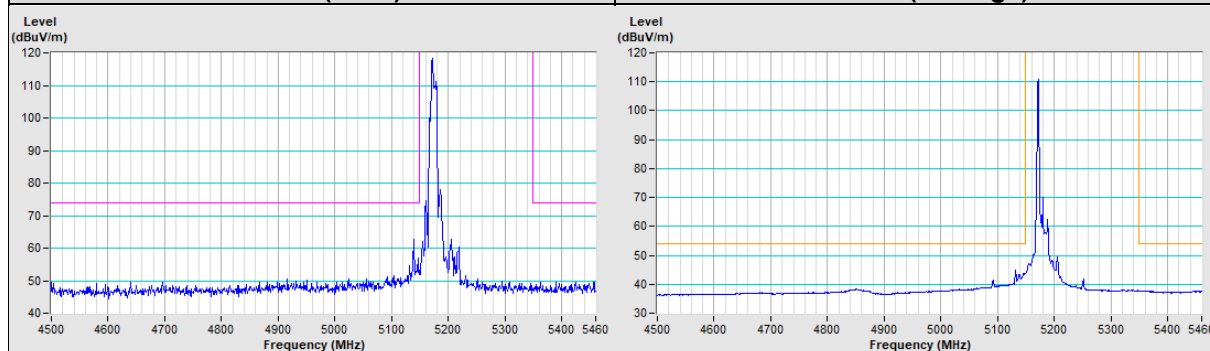


20 MHz Preamble 802.11ax (RU26) Channel 64

Horizontal (Peak)	Horizontal (Average)
--------------------------	-----------------------------

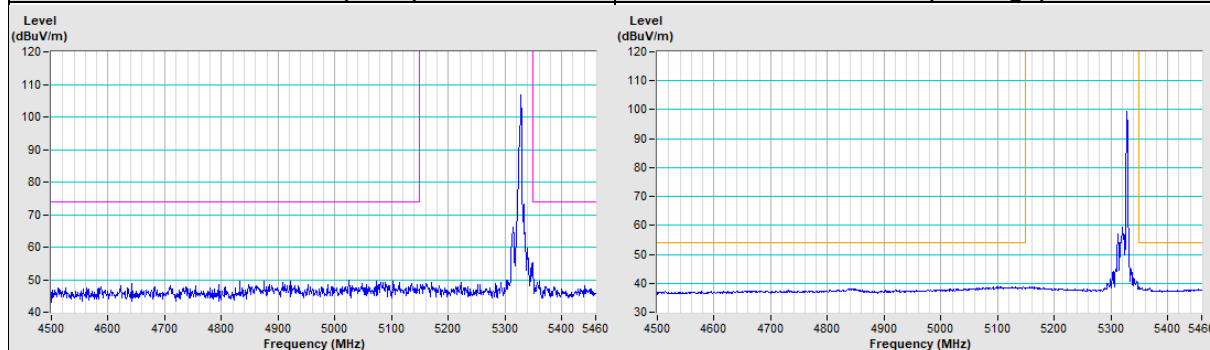


Vertical (Peak)	Vertical (Average)
------------------------	---------------------------

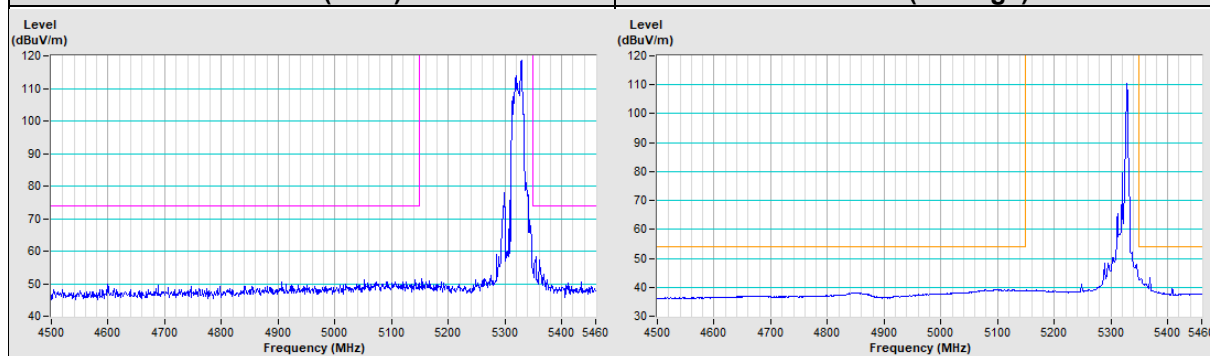


20 MHz Preamble 802.11ax (RU26) Channel 100

Horizontal (Peak) **Horizontal (Average)**

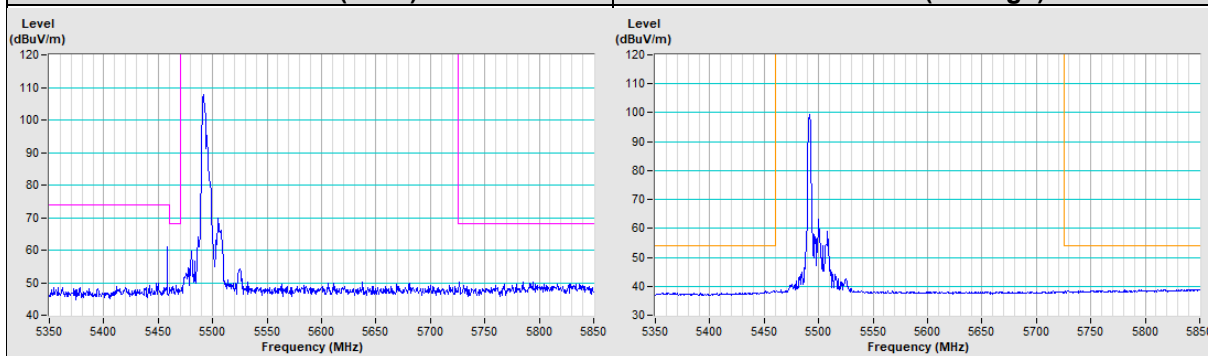


Vertical (Peak) **Vertical (Average)**

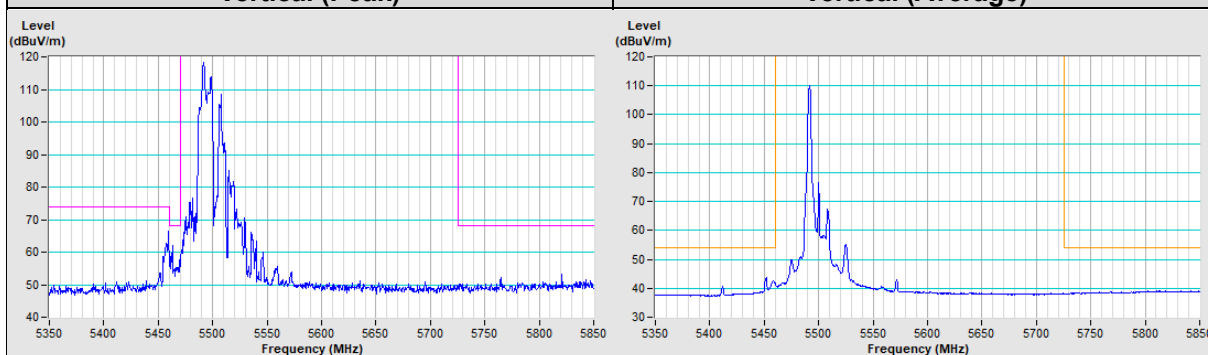


20 MHz Preamble 802.11ax (RU26) Channel 149


Horizontal (Peak) **Vertical (Peak)**

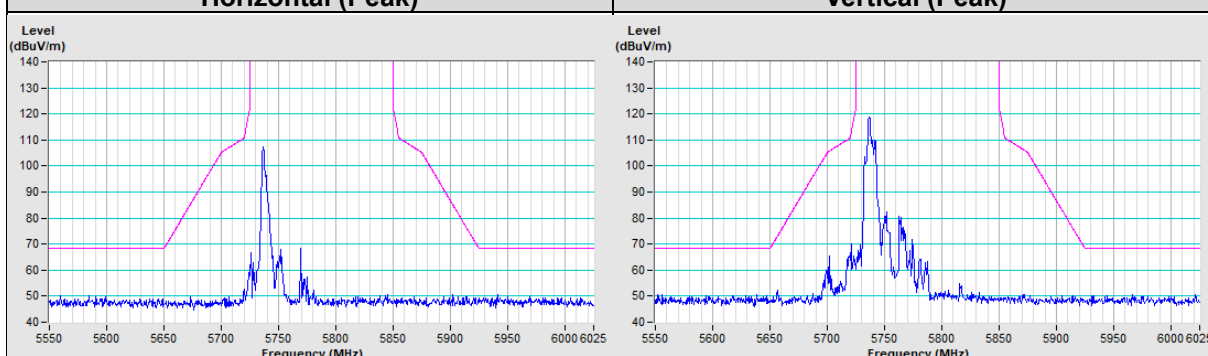

20 MHz Preamble 802.11ax (RU26) Channel 157


Horizontal (Peak) **Vertical (Peak)**

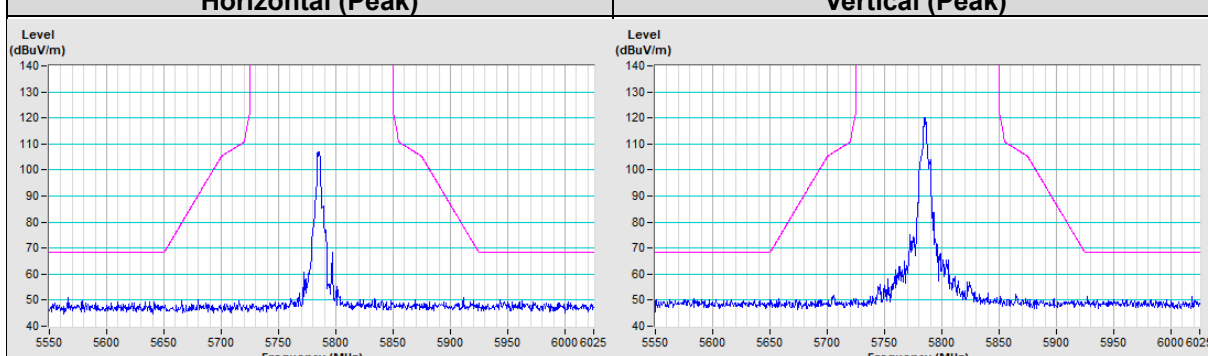

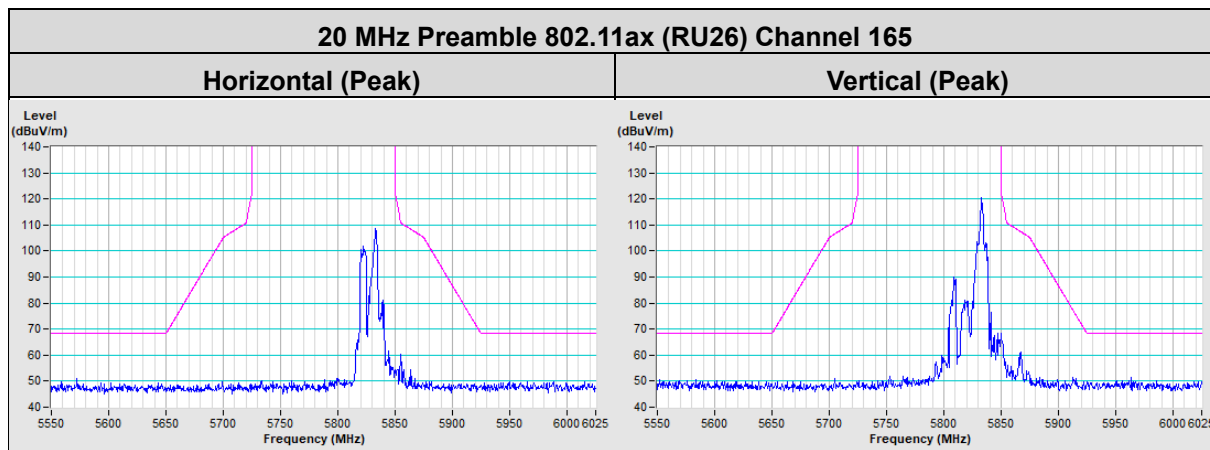


20 MHz Preamble 802.11ax (RU52) Channel 36


Horizontal (Peak)

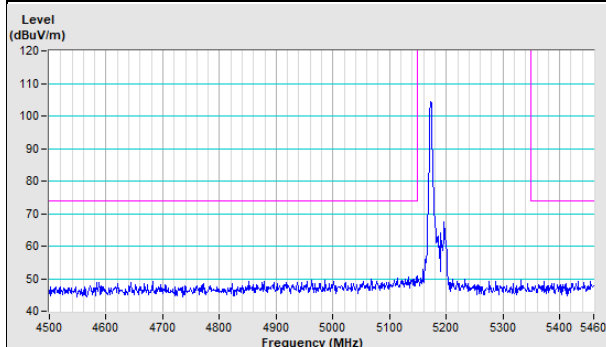


Horizontal (Average)

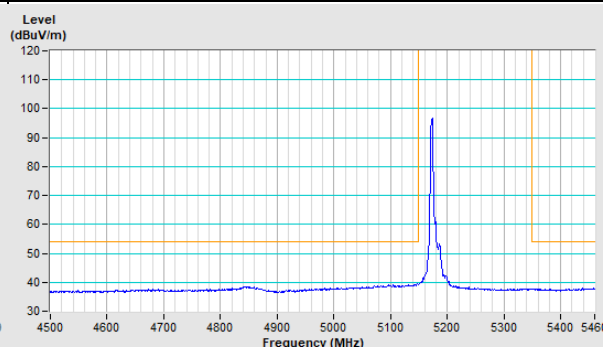

Vertical (Peak)

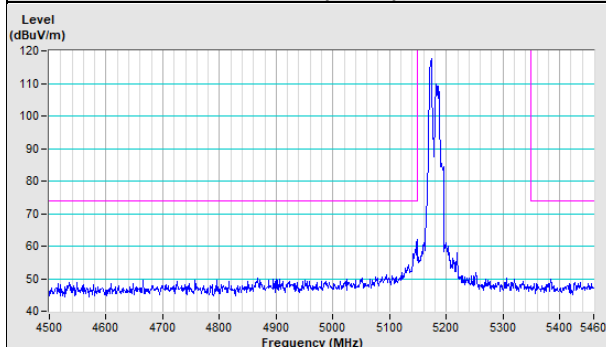


Vertical (Average)

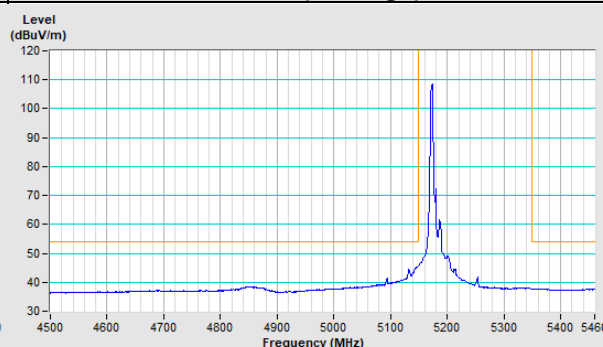


20 MHz Preamble 802.11ax (RU52) Channel 64


Horizontal (Peak)

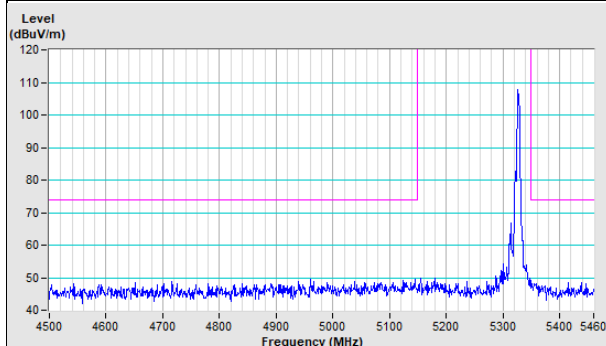


Horizontal (Average)

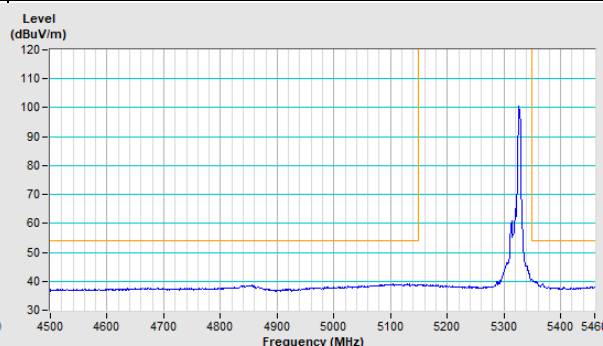


Vertical (Peak)

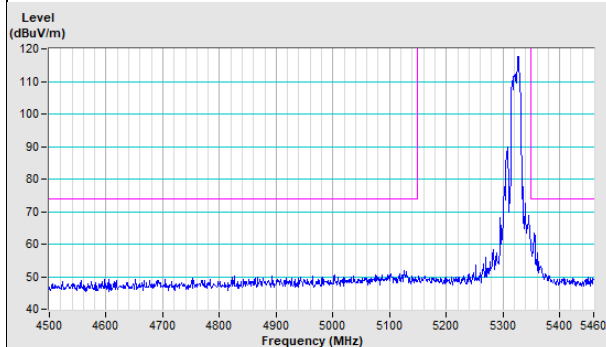


Vertical (Average)

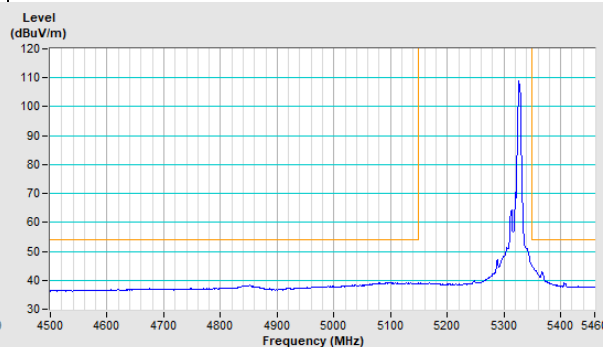


20 MHz Preamble 802.11ax (RU52) Channel 100

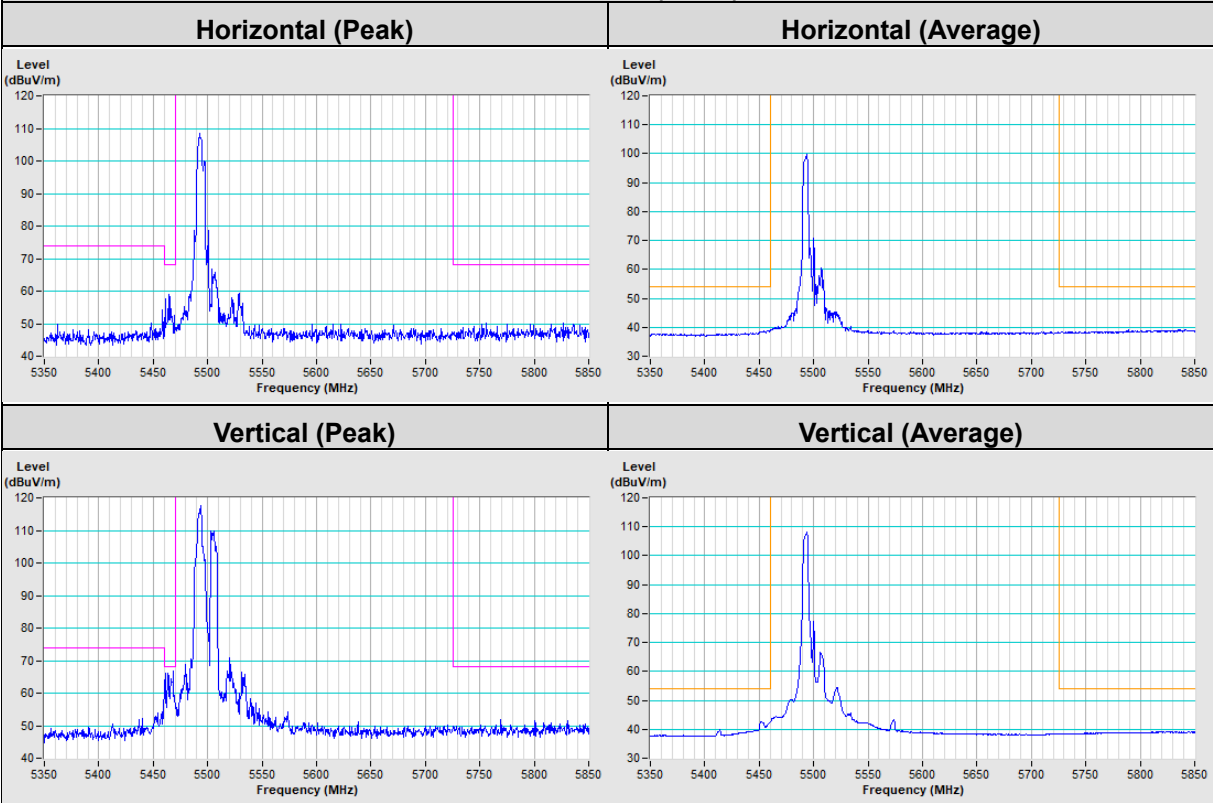


20 MHz Preamble 802.11ax (RU52) Channel 149


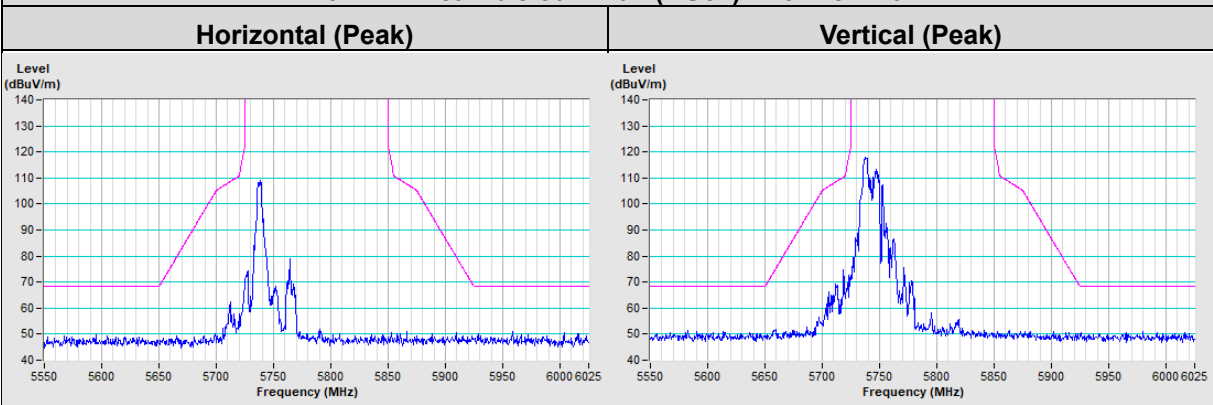


20 MHz Preamble 802.11ax (RU52) Channel 157


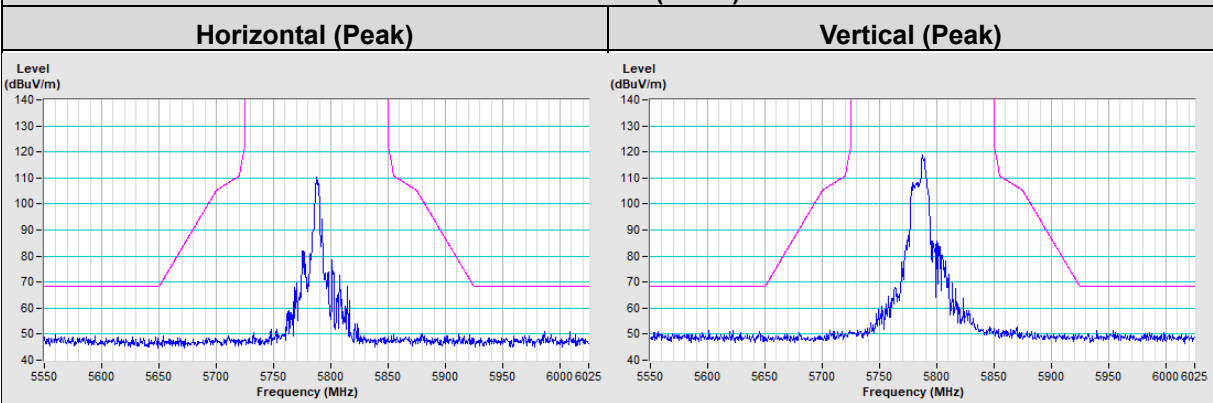


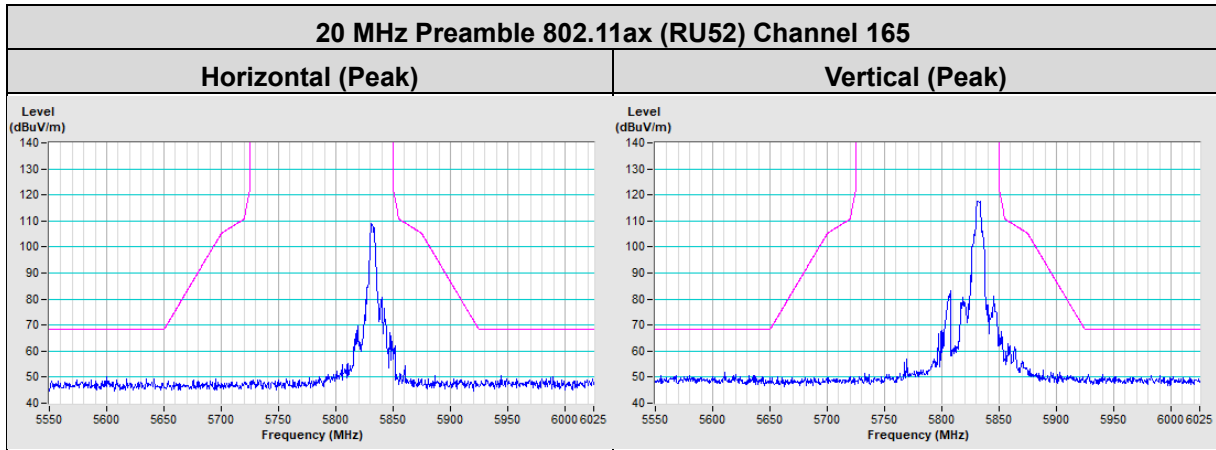

20 MHz Preamble 802.11ax (RU106) Channel 36

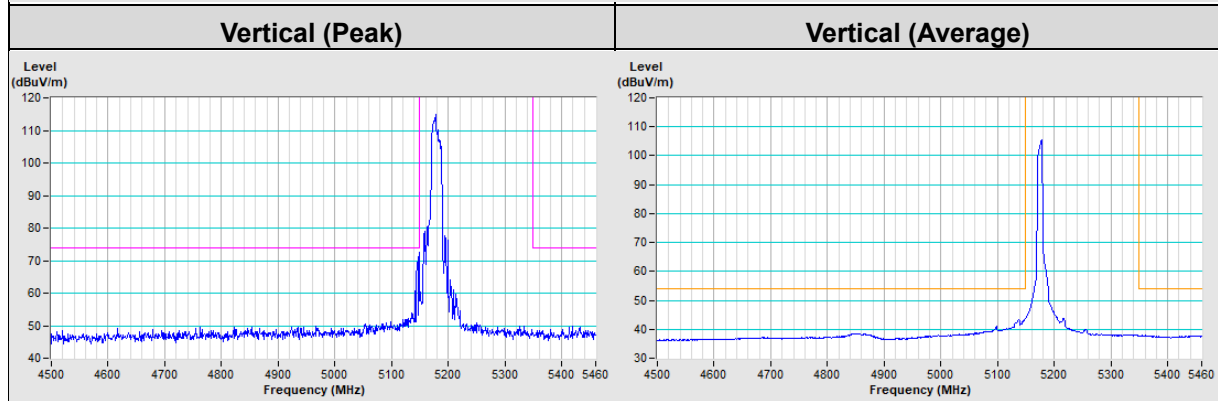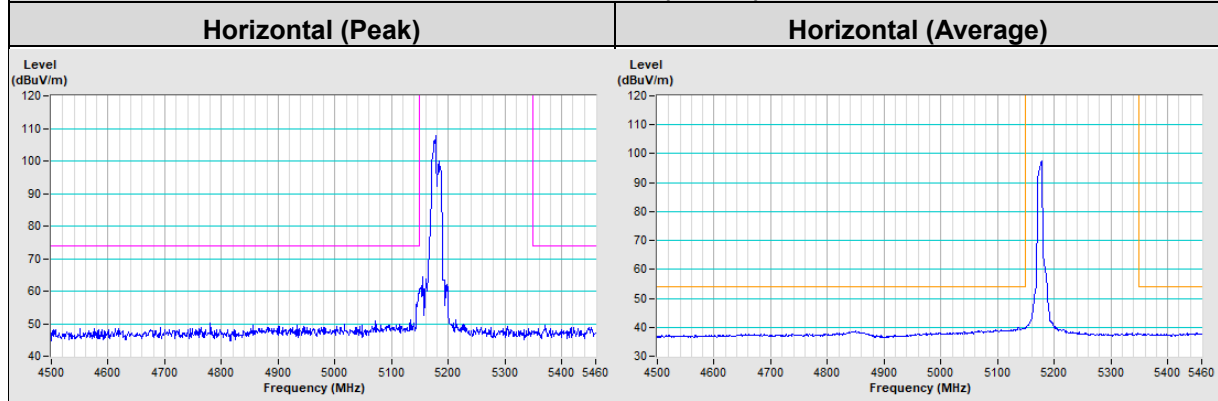


20 MHz Preamble 802.11ax (RU106) Channel 64

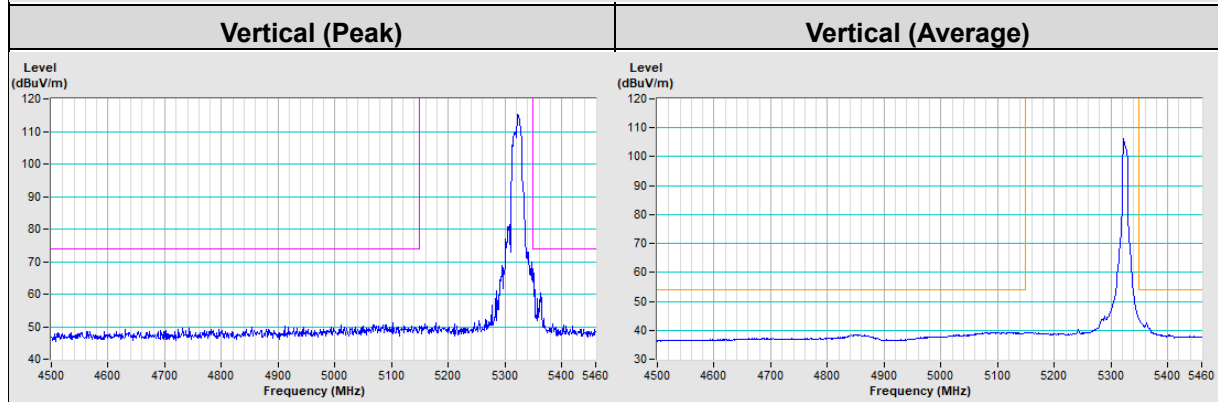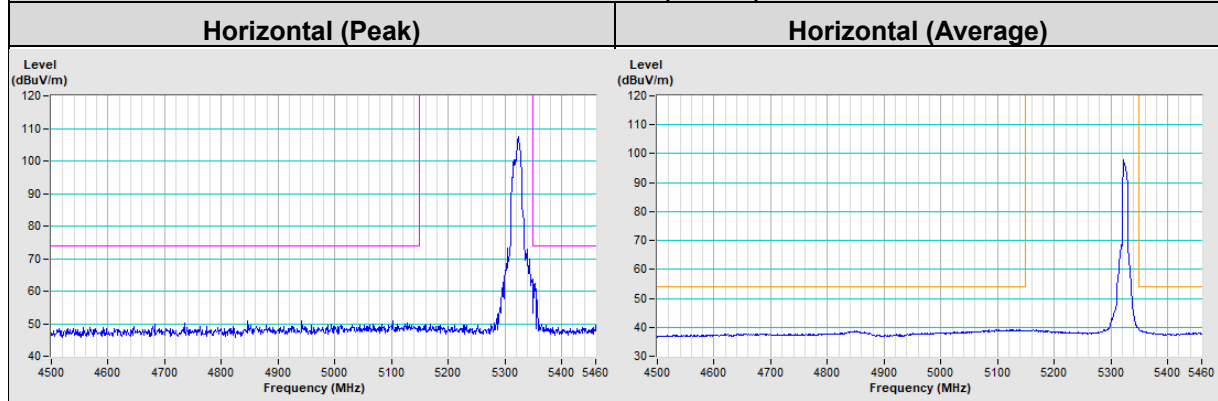


20 MHz Preamble 802.11ax (RU106) Channel 100

Horizontal (Peak)	Horizontal (Average)
--------------------------	-----------------------------

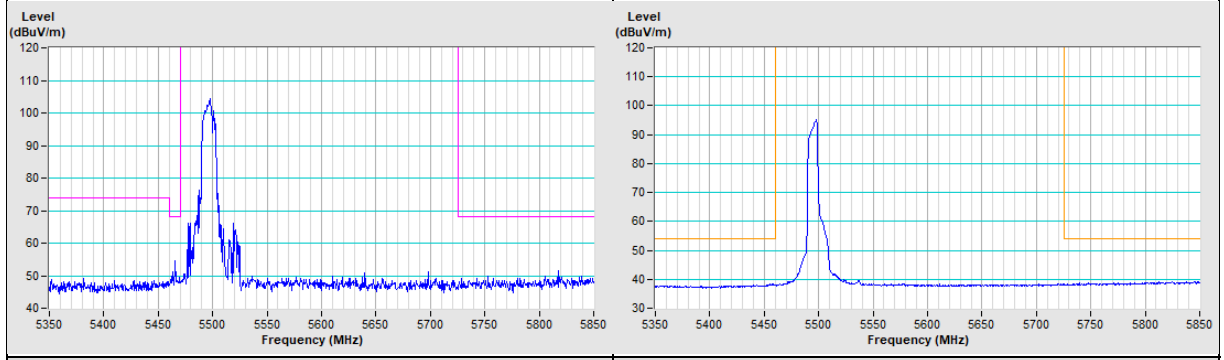


Vertical (Peak)	Vertical (Average)
------------------------	---------------------------

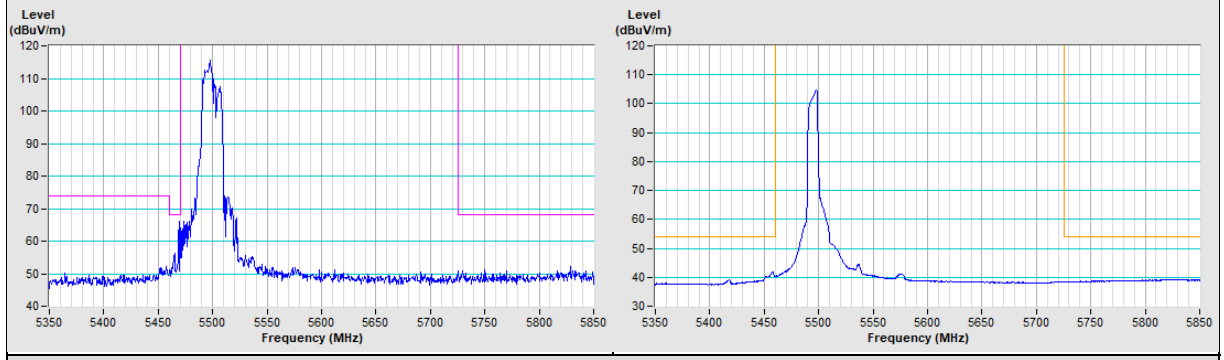


20 MHz Preamble 802.11ax (RU106) Channel 149


Horizontal (Peak)	Vertical (Peak)
--------------------------	------------------------

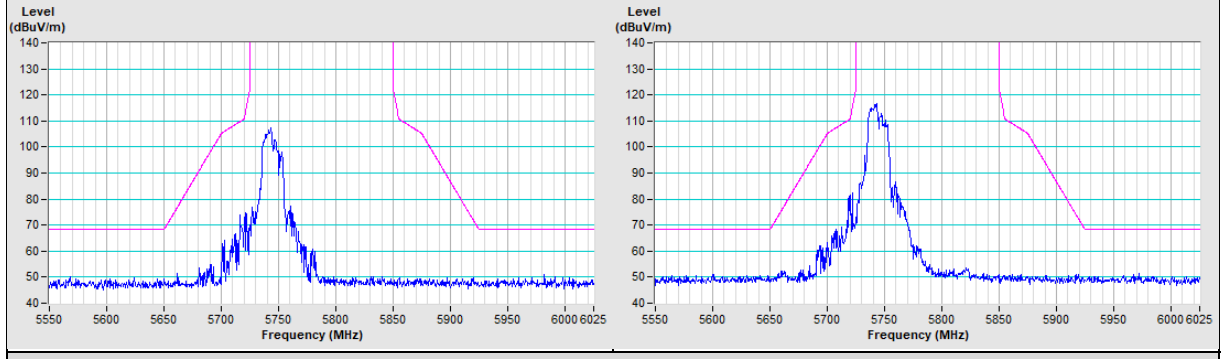

20 MHz Preamble 802.11ax (RU106) Channel 157

Horizontal (Peak)	Vertical (Peak)
--------------------------	------------------------

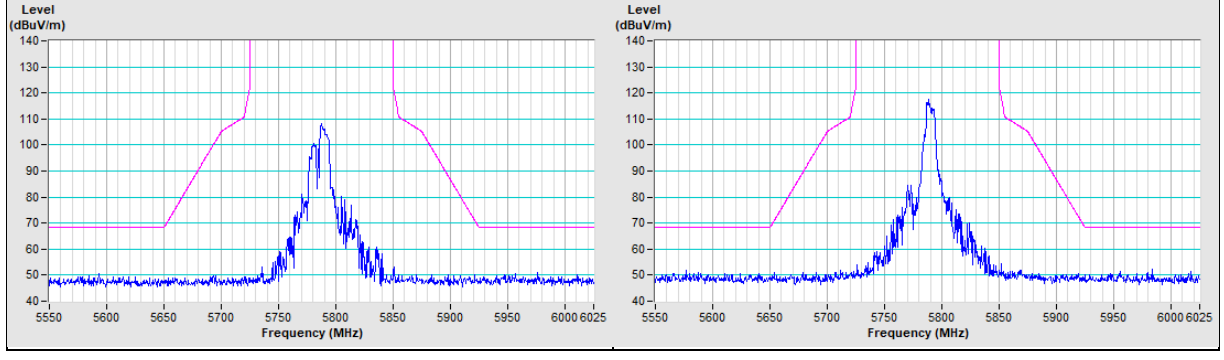

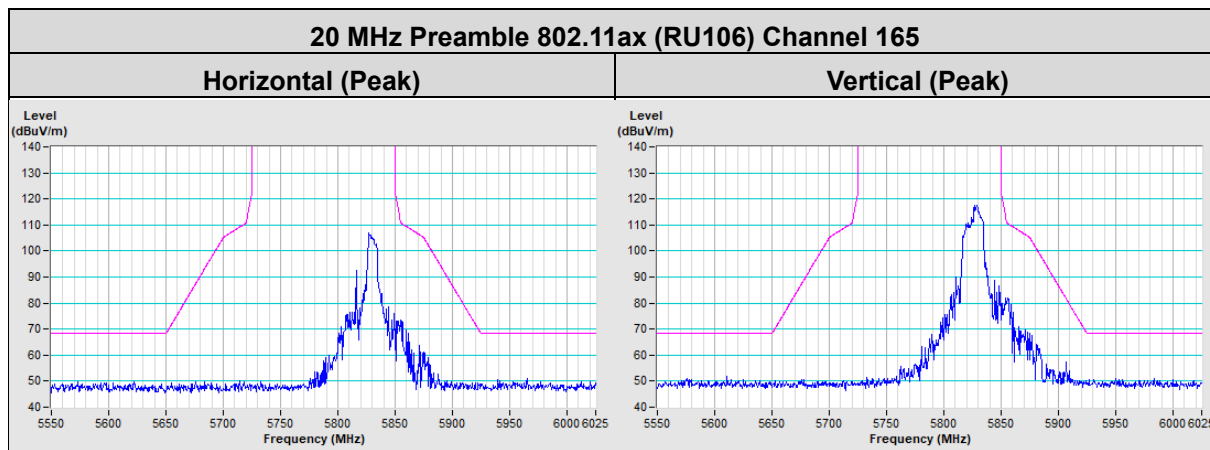


Mode B

RF Mode	TX 802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.5 PK	74.0	-6.5	1.02 H	286	65.1	2.4
2	5150.00	52.2 AV	54.0	-1.8	1.02 H	286	49.8	2.4
3	*5180.00	113.3 PK			1.02 H	286	111.1	2.2
4	*5180.00	104.0 AV			1.02 H	286	101.8	2.2
5	#10360.00	57.8 PK	68.2	-10.4	1.61 H	294	46.1	11.7
6	15540.00	55.5 PK	74.0	-18.5	1.49 H	310	43.7	11.8
7	15540.00	43.3 AV	54.0	-10.7	1.49 H	310	31.5	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

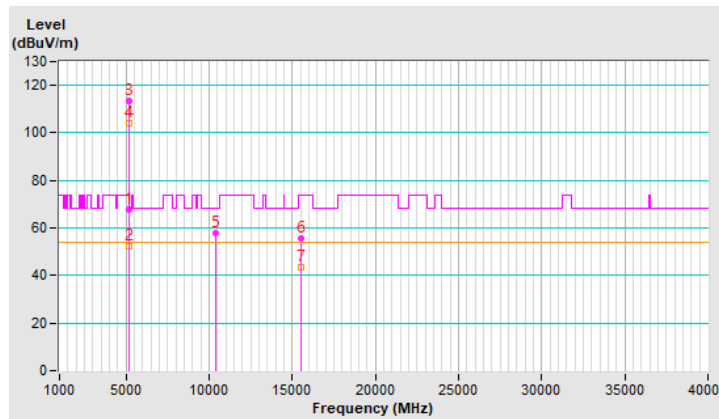


RF Mode	TX 802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.1 PK	74.0	-11.9	3.08 V	128	59.7	2.4
2	5150.00	48.4 AV	54.0	-5.6	3.08 V	128	46.0	2.4
3	*5180.00	110.2 PK			3.08 V	128	108.0	2.2
4	*5180.00	101.1 AV			3.08 V	128	98.9	2.2
5	#10360.00	49.3 PK	68.2	-18.9	1.51 V	297	37.6	11.7
6	15540.00	61.0 PK	74.0	-13.0	2.39 V	240	49.2	11.8
7	15540.00	48.7 AV	54.0	-5.3	2.39 V	240	36.9	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

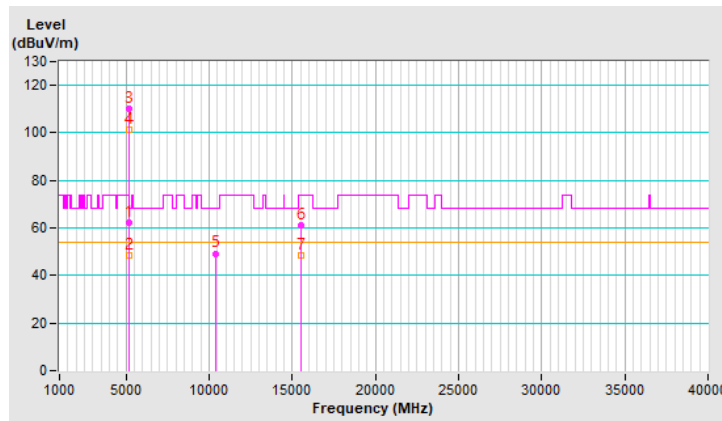


RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.2 PK	74.0	-13.8	1.01 H	287	57.8	2.4
2	5150.00	44.9 AV	54.0	-9.1	1.01 H	287	42.5	2.4
3	*5200.00	115.2 PK			1.01 H	287	113.1	2.1
4	*5200.00	105.7 AV			1.01 H	287	103.6	2.1
5	#10400.00	59.8 PK	68.2	-8.4	1.64 H	278	47.9	11.9
6	15600.00	56.4 PK	74.0	-17.6	1.47 H	308	44.9	11.5
7	15600.00	44.6 AV	54.0	-9.4	1.47 H	308	33.1	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

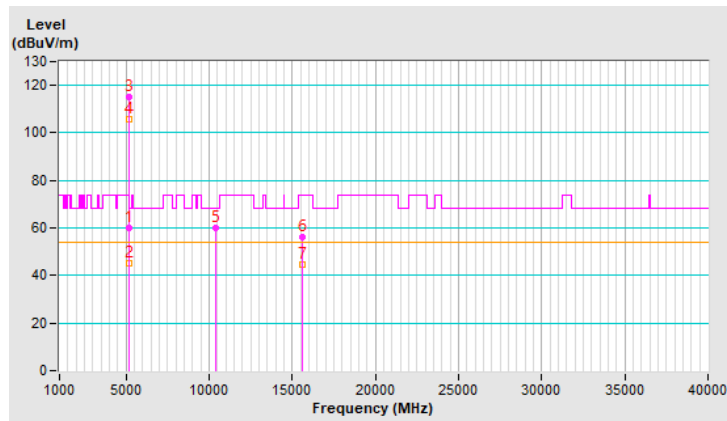




RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.8 PK	74.0	-17.2	3.11 V	133	54.4	2.4
2	5150.00	40.7 AV	54.0	-13.3	3.11 V	133	38.3	2.4
3	*5200.00	111.7 PK			3.11 V	133	109.6	2.1
4	*5200.00	102.4 AV			3.11 V	133	100.3	2.1
5	#10400.00	51.2 PK	68.2	-17.0	1.59 V	282	39.3	11.9
6	15600.00	62.7 PK	74.0	-11.3	2.34 V	261	51.2	11.5
7	15600.00	49.8 AV	54.0	-4.2	2.34 V	261	38.3	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

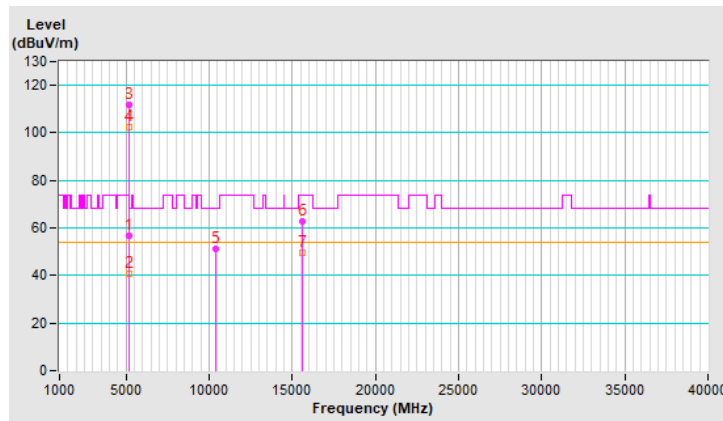


RF Mode	TX 802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.0 PK	74.0	-23.0	1.00 H	287	48.6	2.4
2	5150.00	39.1 AV	54.0	-14.9	1.00 H	287	36.7	2.4
3	*5240.00	113.9 PK			1.00 H	287	112.0	1.9
4	*5240.00	104.6 AV			1.00 H	287	102.7	1.9
5	5350.00	50.9 PK	74.0	-23.1	1.00 H	287	48.9	2.0
6	5350.00	38.2 AV	54.0	-15.8	1.00 H	287	36.2	2.0
7	#10480.00	57.8 PK	68.2	-10.4	1.58 H	282	45.9	11.9
8	15720.00	55.3 PK	74.0	-18.7	1.50 H	304	43.6	11.7
9	15720.00	43.2 AV	54.0	-10.8	1.50 H	304	31.5	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

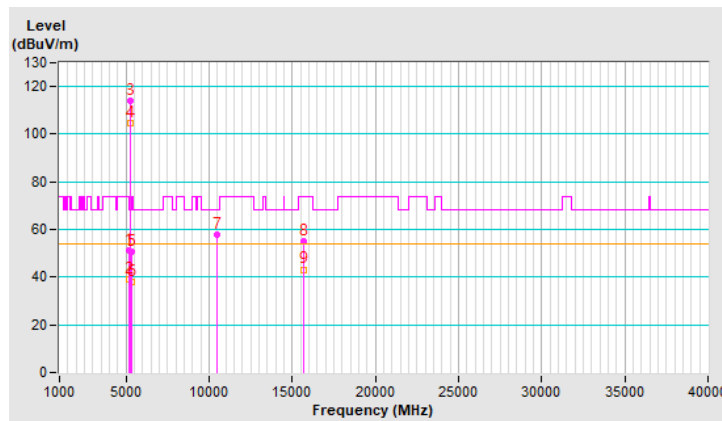




RF Mode	TX 802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.5 PK	74.0	-23.5	3.11 V	129	48.1	2.4
2	5150.00	38.8 AV	54.0	-15.2	3.11 V	129	36.4	2.4
3	*5240.00	111.0 PK			3.11 V	129	109.1	1.9
4	*5240.00	101.7 AV			3.11 V	129	99.8	1.9
5	5350.00	50.7 PK	74.0	-23.3	3.11 V	129	48.7	2.0
6	5350.00	37.9 AV	54.0	-16.1	3.11 V	129	35.9	2.0
7	#10480.00	49.6 PK	68.2	-18.6	1.55 V	282	37.7	11.9
8	15720.00	60.4 PK	74.0	-13.6	2.40 V	254	48.7	11.7
9	15720.00	48.3 AV	54.0	-5.7	2.40 V	254	36.6	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

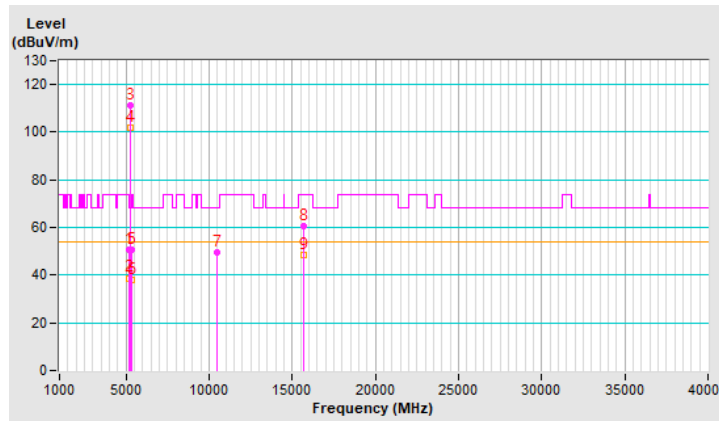


RF Mode	TX 802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.9 PK	74.0	-23.1	1.09 H	287	48.5	2.4
2	5150.00	38.9 AV	54.0	-15.1	1.09 H	287	36.5	2.4
3	*5260.00	114.8 PK			1.09 H	287	113.0	1.8
4	*5260.00	105.4 AV			1.09 H	287	103.6	1.8
5	5350.00	50.7 PK	74.0	-23.3	1.09 H	287	48.7	2.0
6	5350.00	38.4 AV	54.0	-15.6	1.09 H	287	36.4	2.0
7	#10520.00	57.3 PK	68.2	-10.9	1.68 H	286	45.3	12.0
8	15780.00	55.5 PK	74.0	-18.5	1.44 H	326	44.0	11.5
9	15780.00	42.5 AV	54.0	-11.5	1.44 H	326	31.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

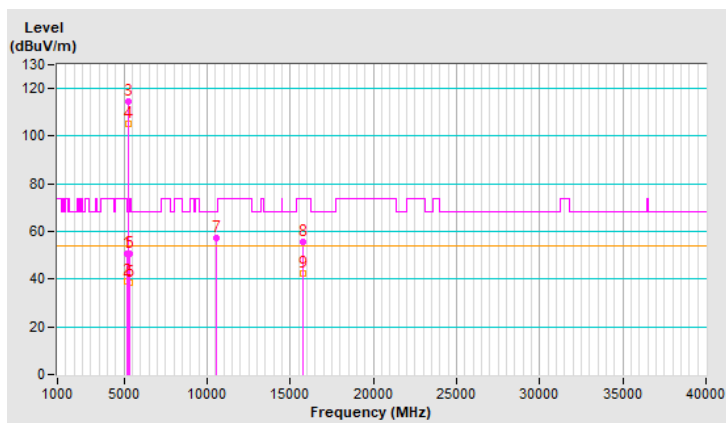


RF Mode	TX 802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.0 PK	74.0	-23.0	2.87 V	143	48.6	2.4
2	5150.00	38.9 AV	54.0	-15.1	2.87 V	143	36.5	2.4
3	*5260.00	111.3 PK			2.87 V	143	109.5	1.8
4	*5260.00	102.1 AV			2.87 V	143	100.3	1.8
5	5350.00	50.8 PK	74.0	-23.2	2.87 V	143	48.8	2.0
6	5350.00	38.4 AV	54.0	-15.6	2.87 V	143	36.4	2.0
7	#10520.00	48.6 PK	68.2	-19.6	1.67 V	277	36.6	12.0
8	15780.00	58.3 PK	74.0	-15.7	2.34 V	248	46.8	11.5
9	15780.00	45.6 AV	54.0	-8.4	2.34 V	248	34.1	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

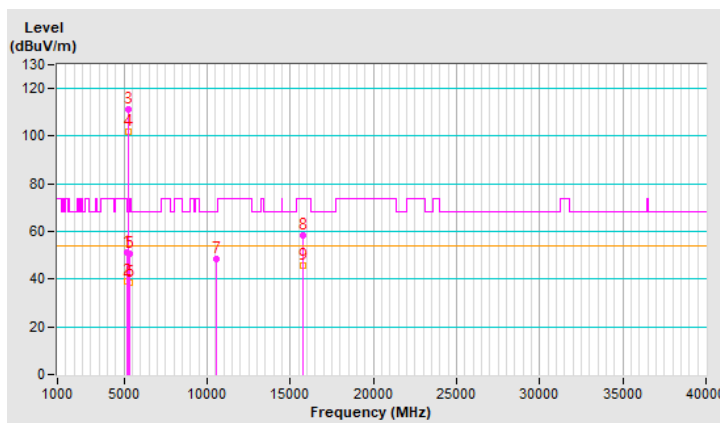




RF Mode	TX 802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	115.1 PK			1.02 H	286	113.4	1.7
2	*5300.00	105.8 AV			1.02 H	286	104.1	1.7
3	5350.00	65.9 PK	74.0	-8.1	1.02 H	286	63.9	2.0
4	5350.00	45.1 AV	54.0	-8.9	1.02 H	286	43.1	2.0
5	10600.00	57.6 PK	74.0	-16.4	1.69 H	276	45.9	11.7
6	10600.00	44.5 AV	54.0	-9.5	1.69 H	276	32.8	11.7
7	15900.00	55.5 PK	74.0	-18.5	1.40 H	310	44.4	11.1
8	15900.00	42.7 AV	54.0	-11.3	1.40 H	310	31.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

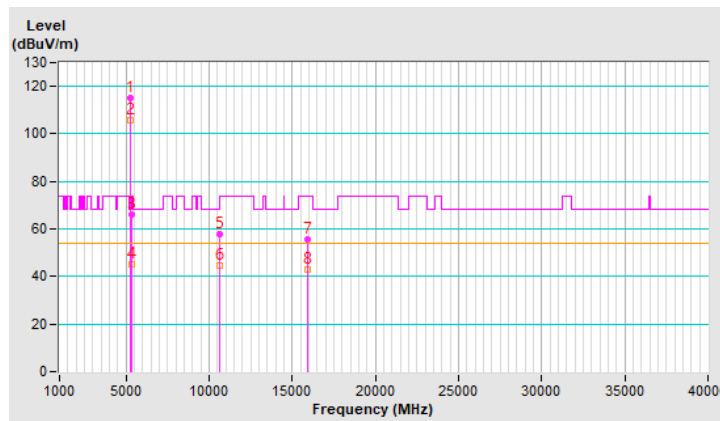


RF Mode	TX 802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	111.0 PK			3.09 V	141	109.3	1.7
2	*5300.00	102.0 AV			3.09 V	141	100.3	1.7
3	10600.00	48.4 PK	74.0	-25.6	1.64 V	291	36.7	11.7
4	10600.00	37.6 AV	54.0	-16.4	1.64 V	291	25.9	11.7
5	15900.00	58.8 PK	74.0	-15.2	2.31 V	262	47.7	11.1
6	15900.00	46.1 AV	54.0	-7.9	2.31 V	262	35.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

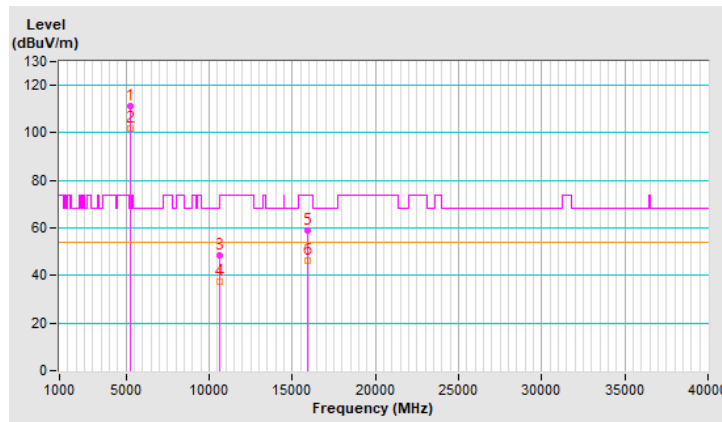


RF Mode	TX 802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	113.1 PK			1.04 H	288	111.4	1.7
2	*5320.00	103.9 AV			1.04 H	288	102.2	1.7
3	5350.00	70.9 PK	74.0	-3.1	1.04 H	288	68.9	2.0
4	5350.00	52.2 AV	54.0	-1.8	1.04 H	288	50.2	2.0
5	10640.00	54.7 PK	74.0	-19.3	1.65 H	260	43.1	11.6
6	10640.00	41.6 AV	54.0	-12.4	1.65 H	260	30.0	11.6
7	15960.00	52.9 PK	74.0	-21.1	1.34 H	295	41.5	11.4
8	15960.00	40.1 AV	54.0	-13.9	1.34 H	295	28.7	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

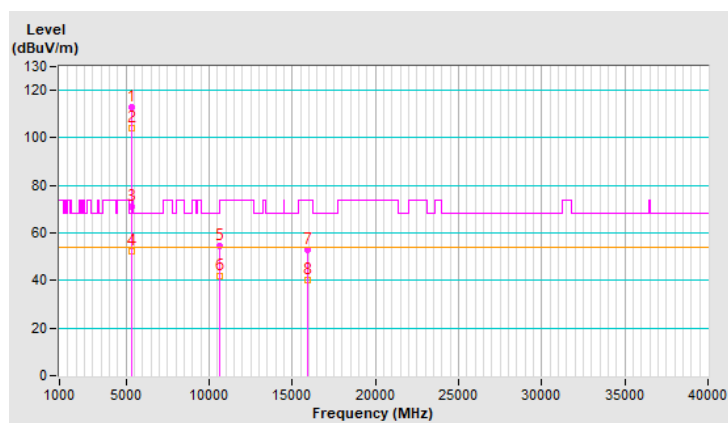




RF Mode	TX 802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	109.3 PK			3.07 V	129	107.6	1.7
2	*5320.00	100.6 AV			3.07 V	129	98.9	1.7
3	5350.00	66.2 PK	74.0	-7.8	3.07 V	129	64.2	2.0
4	5350.00	46.9 AV	54.0	-7.1	3.07 V	129	44.9	2.0
5	10640.00	47.8 PK	74.0	-26.2	1.67 V	297	36.2	11.6
6	10640.00	37.2 AV	54.0	-16.8	1.67 V	297	25.6	11.6
7	15960.00	55.3 PK	74.0	-18.7	2.34 V	267	43.9	11.4
8	15960.00	42.9 AV	54.0	-11.1	2.34 V	267	31.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

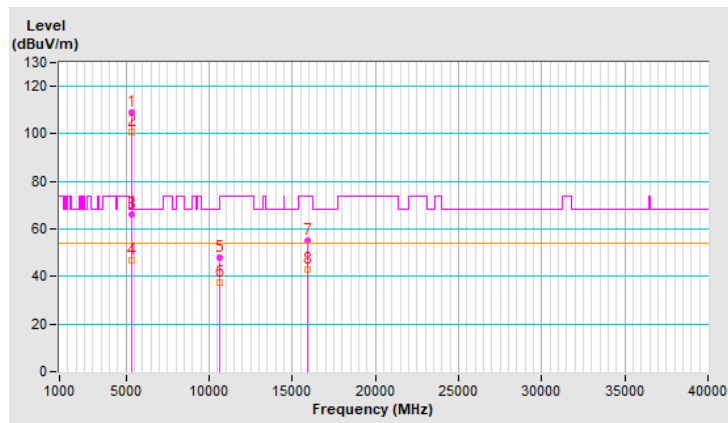




RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.1 PK	74.0	-16.9	1.32 H	296	54.9	2.2
2	5460.00	41.3 AV	54.0	-12.7	1.32 H	296	39.1	2.2
3	#5470.00	66.4 PK	68.2	-1.8	1.32 H	296	64.2	2.2
4	*5500.00	109.8 PK			1.32 H	296	107.7	2.1
5	*5500.00	101.1 AV			1.32 H	296	99.0	2.1
6	11000.00	54.6 PK	74.0	-19.4	1.60 H	245	42.5	12.1
7	11000.00	41.2 AV	54.0	-12.8	1.60 H	245	29.1	12.1
8	#16500.00	53.5 PK	68.2	-14.7	1.30 H	283	40.1	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

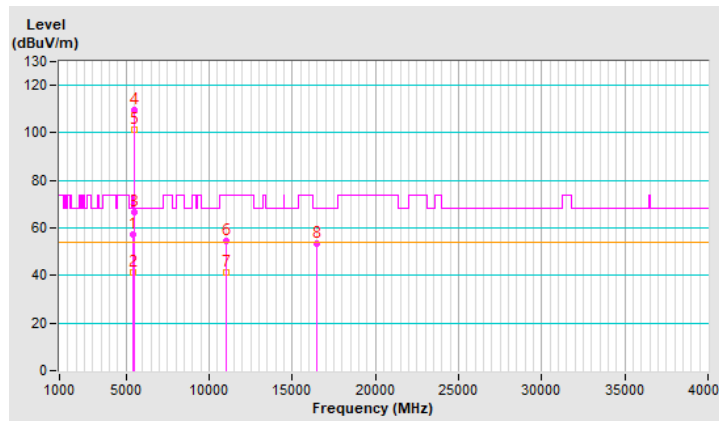


RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.9 PK	74.0	-19.1	2.31 V	127	52.7	2.2
2	5460.00	39.2 AV	54.0	-14.8	2.31 V	127	37.0	2.2
3	#5468.90	63.8 PK	68.2	-4.4	2.31 V	127	61.6	2.2
4	*5500.00	105.7 PK			2.31 V	127	103.6	2.1
5	*5500.00	96.9 AV			2.31 V	127	94.8	2.1
6	11000.00	47.6 PK	74.0	-26.4	1.61 V	310	35.5	12.1
7	11000.00	37.0 AV	54.0	-17.0	1.61 V	310	24.9	12.1
8	#16500.00	55.2 PK	68.2	-13.0	2.39 V	272	41.8	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

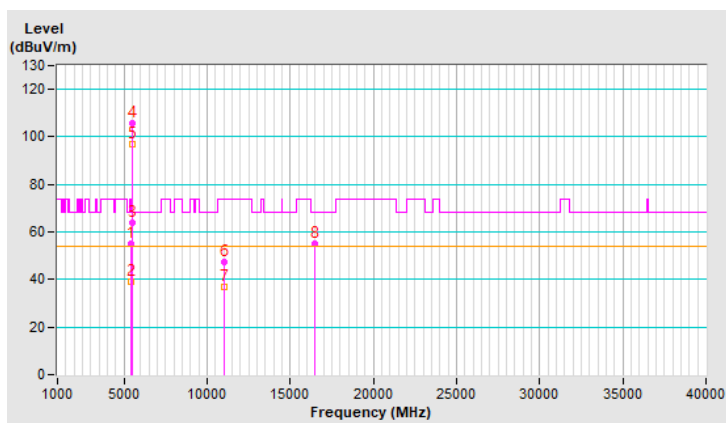


RF Mode	TX 802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	114.3 PK			1.31 H	298	112.1	2.2
2	*5580.00	105.2 AV			1.31 H	298	103.0	2.2
3	11160.00	57.7 PK	74.0	-16.3	1.67 H	263	45.8	11.9
4	11160.00	44.4 AV	54.0	-9.6	1.67 H	263	32.5	11.9
5	#16740.00	53.2 PK	68.2	-15.0	1.46 H	307	38.0	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

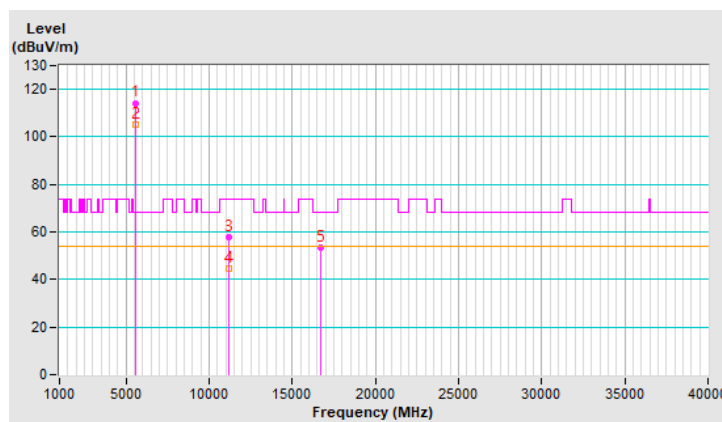


RF Mode	TX 802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	110.5 PK			2.37 V	129	108.3	2.2
2	*5580.00	101.7 AV			2.37 V	129	99.5	2.2
3	11160.00	47.8 PK	74.0	-26.2	1.63 V	300	35.9	11.9
4	11160.00	37.0 AV	54.0	-17.0	1.63 V	300	25.1	11.9
5	#16740.00	56.4 PK	68.2	-11.8	2.19 V	264	41.2	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

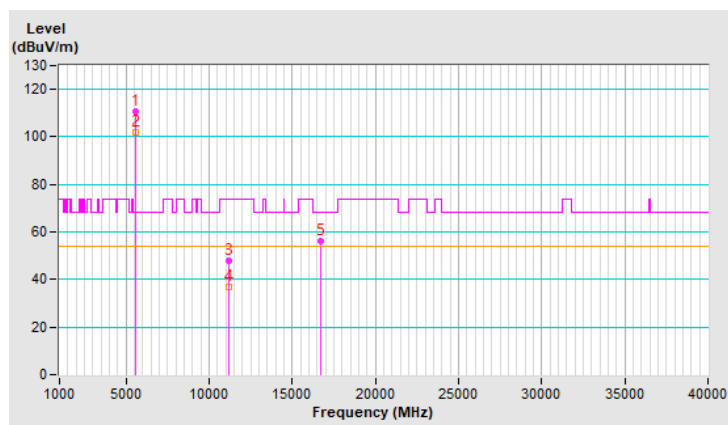


RF Mode	TX 802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	110.9 PK			1.16 H	296	108.6	2.3
2	*5700.00	102.2 AV			1.16 H	296	99.9	2.3
3	#5725.00	66.3 PK	68.2	-1.9	1.16 H	296	63.8	2.5
4	11400.00	58.3 PK	74.0	-15.7	1.72 H	249	46.1	12.2
5	11400.00	44.8 AV	54.0	-9.2	1.72 H	249	32.6	12.2
6	#17100.00	53.0 PK	68.2	-15.2	1.43 H	297	36.4	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

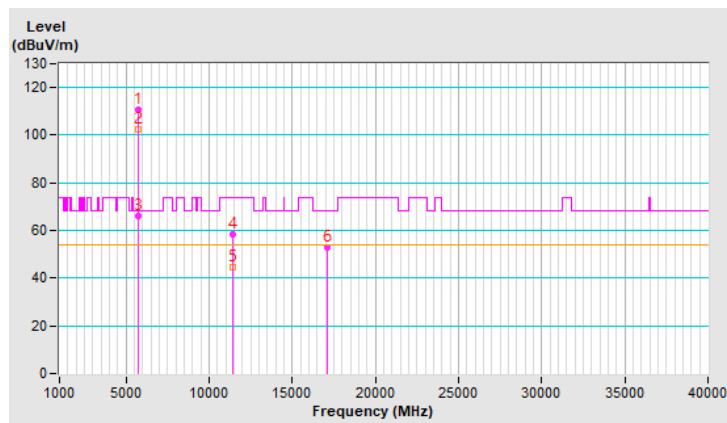


RF Mode	TX 802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	107.5 PK			2.27 V	133	105.2	2.3
2	*5700.00	98.2 AV			2.27 V	133	95.9	2.3
3	#5725.00	63.3 PK	68.2	-4.9	2.27 V	133	60.8	2.5
4	11400.00	47.5 PK	74.0	-26.5	1.65 V	312	35.3	12.2
5	11400.00	36.8 AV	54.0	-17.2	1.65 V	312	24.6	12.2
6	#17100.00	53.7 PK	68.2	-14.5	2.19 V	279	37.1	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

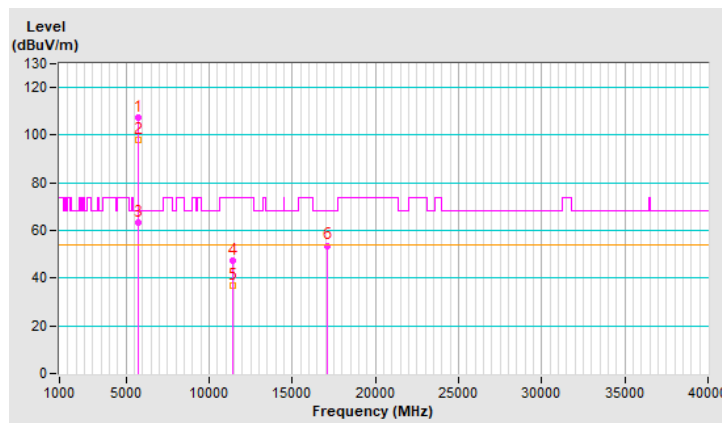


RF Mode	TX 802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.4 PK	74.0	-24.6	1.05 H	297	47.2	2.2
2	5460.00	37.8 AV	54.0	-16.2	1.05 H	297	35.6	2.2
3	#5470.00	50.0 PK	68.2	-18.2	1.05 H	297	47.8	2.2
4	*5720.00	115.8 PK			1.05 H	297	113.4	2.4
5	*5720.00	106.3 AV			1.05 H	297	103.9	2.4
6	#5850.00	51.0 PK	68.2	-17.2	1.05 H	297	48.1	2.9
7	11440.00	57.6 PK	74.0	-16.4	1.69 H	256	45.4	12.2
8	11440.00	44.3 AV	54.0	-9.7	1.69 H	256	32.1	12.2
9	#17160.00	52.8 PK	68.2	-15.4	1.42 H	300	36.3	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

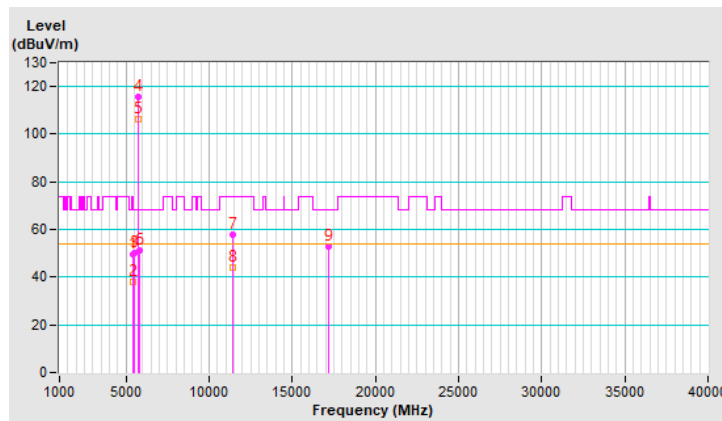


RF Mode	TX 802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.4 PK	74.0	-24.6	2.33 V	130	47.2	2.2
2	5460.00	38.0 AV	54.0	-16.0	2.33 V	130	35.8	2.2
3	#5470.00	49.7 PK	68.2	-18.5	2.33 V	130	47.5	2.2
4	*5720.00	110.9 PK			2.33 V	130	108.5	2.4
5	*5720.00	101.9 AV			2.33 V	130	99.5	2.4
6	#5850.00	50.5 PK	68.2	-17.7	2.33 V	130	47.6	2.9
7	11440.00	48.1 PK	74.0	-25.9	1.57 V	291	35.9	12.2
8	11440.00	37.2 AV	54.0	-16.8	1.57 V	291	25.0	12.2
9	#17160.00	56.6 PK	68.2	-11.6	2.14 V	257	40.1	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

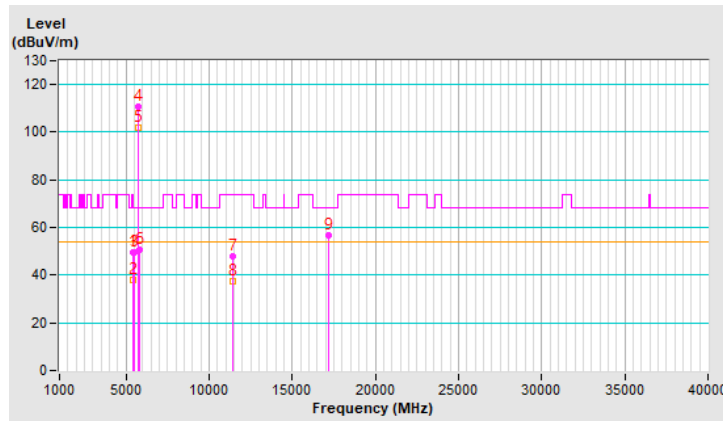


RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5635.35	51.0 PK	68.2	-17.2	1.02 H	297	48.7	2.3
2	*5745.00	115.2 PK			1.02 H	297	112.7	2.5
3	*5745.00	105.8 AV			1.02 H	297	103.3	2.5
4	#6000.37	51.0 PK	68.2	-17.2	1.02 H	297	48.1	2.9
5	11490.00	53.1 PK	74.0	-20.9	1.50 H	282	40.7	12.4
6	11490.00	42.1 AV	54.0	-11.9	1.50 H	282	29.7	12.4
7	#17235.00	57.9 PK	68.2	-10.3	2.99 H	78	41.2	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

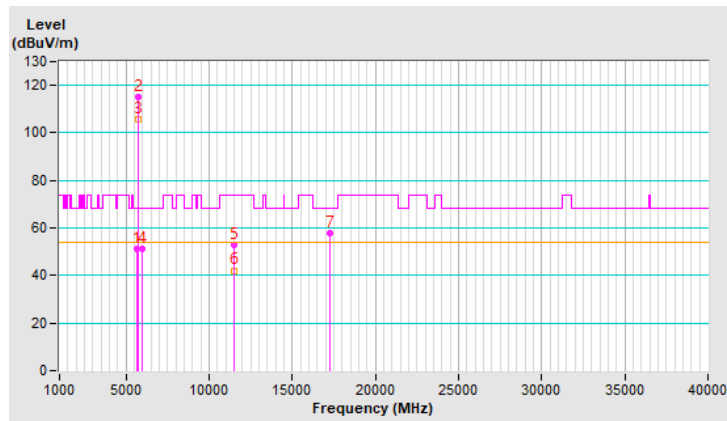




RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5637.65	50.9 PK	68.2	-17.3	3.19 V	105	48.6	2.3
2	*5745.00	109.2 PK			3.19 V	105	106.7	2.5
3	*5745.00	100.0 AV			3.19 V	105	97.5	2.5
4	#5973.38	51.3 PK	68.2	-16.9	3.19 V	105	48.4	2.9
5	11490.00	57.4 PK	74.0	-16.6	1.13 V	295	45.0	12.4
6	11490.00	45.9 AV	54.0	-8.1	1.13 V	295	33.5	12.4
7	#17235.00	54.4 PK	68.2	-13.8	3.36 V	206	37.7	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

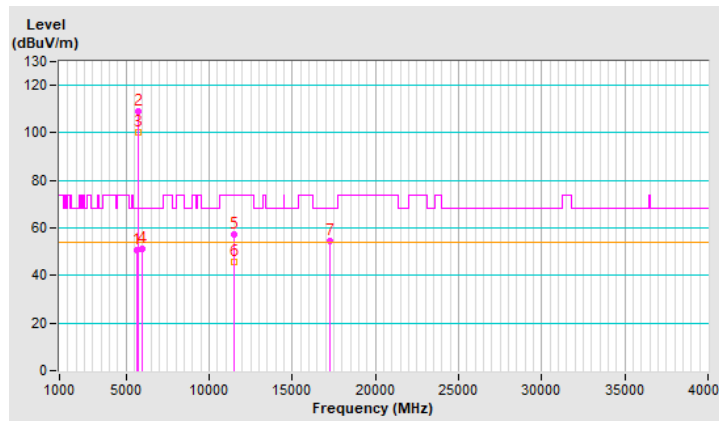




RF Mode	TX 802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5610.36	50.6 PK	68.2	-17.6	1.06 H	293	48.4	2.2
2	*5785.00	113.6 PK			1.06 H	293	110.9	2.7
3	*5785.00	104.2 AV			1.06 H	293	101.5	2.7
4	#5953.33	50.9 PK	68.2	-17.3	1.06 H	293	48.0	2.9
5	11570.00	52.9 PK	74.0	-21.1	1.54 H	272	40.5	12.4
6	11570.00	41.7 AV	54.0	-12.3	1.54 H	272	29.3	12.4
7	#17355.00	58.3 PK	68.2	-9.9	2.96 H	85	40.7	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

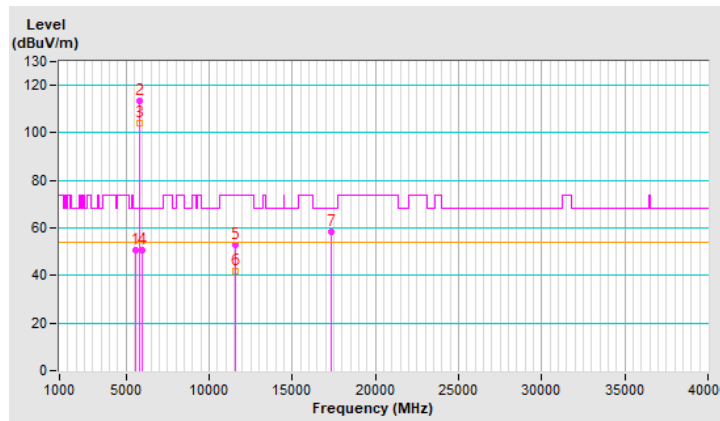




RF Mode	TX 802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5576.42	50.7 PK	68.2	-17.5	3.13 V	144	48.5	2.2
2	*5785.00	108.2 PK			3.13 V	144	105.5	2.7
3	*5785.00	98.8 AV			3.13 V	144	96.1	2.7
4	#5936.98	50.9 PK	68.2	-17.3	3.13 V	144	48.0	2.9
5	11570.00	57.2 PK	74.0	-16.8	1.16 V	286	44.8	12.4
6	11570.00	45.5 AV	54.0	-8.5	1.16 V	286	33.1	12.4
7	#17355.00	54.9 PK	68.2	-13.3	3.38 V	200	37.3	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

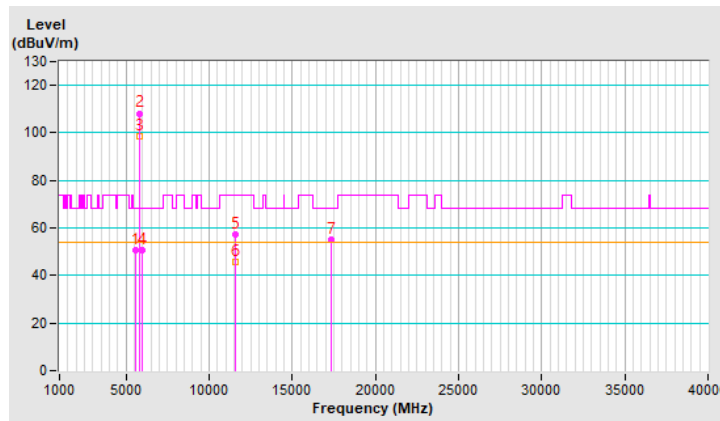




RF Mode	TX 802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5594.88	50.4 PK	68.2	-17.8	1.06 H	294	48.2	2.2
2	*5825.00	114.3 PK			1.06 H	294	111.5	2.8
3	*5825.00	104.9 AV			1.06 H	294	102.1	2.8
4	#5937.94	51.6 PK	68.2	-16.6	1.06 H	294	48.7	2.9
5	11650.00	53.4 PK	74.0	-20.6	1.46 H	273	41.5	11.9
6	11650.00	42.3 AV	54.0	-11.7	1.46 H	273	30.4	11.9
7	#17475.00	57.8 PK	68.2	-10.4	2.95 H	93	39.3	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

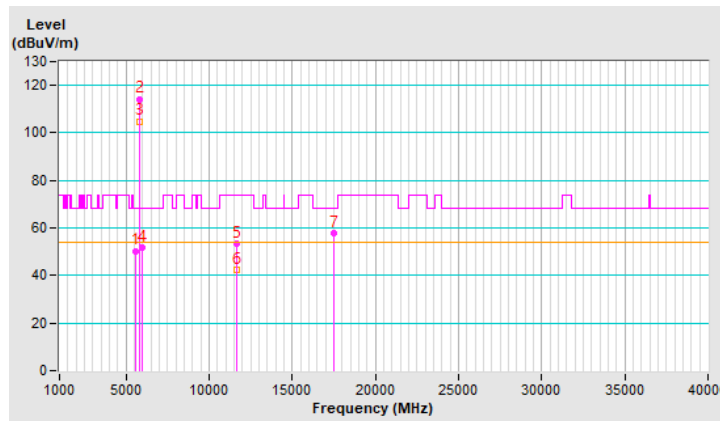




RF Mode	TX 802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5586.99	49.9 PK	68.2	-18.3	2.39 V	133	47.7	2.2
2	*5825.00	106.3 PK			2.39 V	133	103.5	2.8
3	*5825.00	97.3 AV			2.39 V	133	94.5	2.8
4	#5981.72	50.6 PK	68.2	-17.6	2.39 V	133	47.7	2.9
5	11650.00	56.9 PK	74.0	-17.1	1.10 V	290	45.0	11.9
6	11650.00	45.4 AV	54.0	-8.6	1.10 V	290	33.5	11.9
7	#17475.00	54.5 PK	68.2	-13.7	3.35 V	205	36.0	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

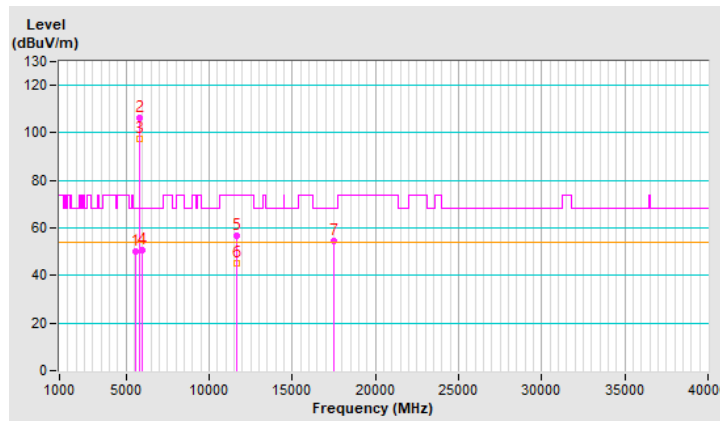


RF Mode	TX 802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.6 PK	74.0	-6.4	1.04 H	286	65.2	2.4
2	5150.00	52.2 AV	54.0	-1.8	1.04 H	286	49.8	2.4
3	*5180.00	114.6 PK			1.04 H	286	112.4	2.2
4	*5180.00	103.6 AV			1.04 H	286	101.4	2.2
5	#10360.00	58.1 PK	68.2	-10.1	1.64 H	291	46.4	11.7
6	15540.00	49.1 PK	74.0	-24.9	1.50 H	301	37.3	11.8
7	15540.00	37.8 AV	54.0	-16.2	1.50 H	301	26.0	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

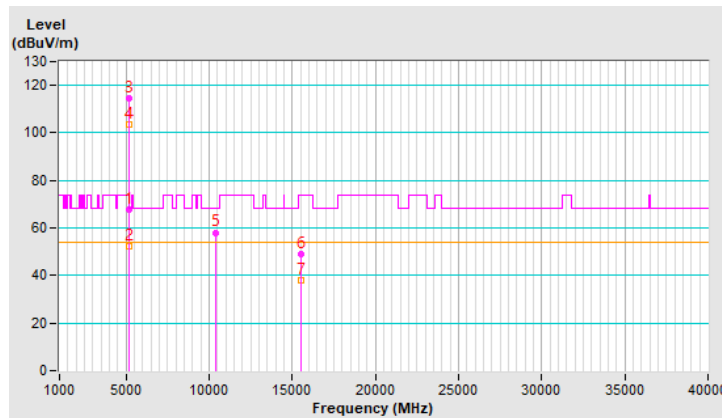


RF Mode	TX 802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.7 PK	74.0	-12.3	3.10 V	130	59.3	2.4
2	5150.00	48.0 AV	54.0	-6.0	3.10 V	130	45.6	2.4
3	*5180.00	111.5 PK			3.10 V	130	109.3	2.2
4	*5180.00	100.5 AV			3.10 V	130	98.3	2.2
5	#10360.00	49.5 PK	68.2	-18.7	1.53 V	284	37.8	11.7
6	15540.00	54.4 PK	74.0	-19.6	2.35 V	255	42.6	11.8
7	15540.00	44.7 AV	54.0	-9.3	2.35 V	255	32.9	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

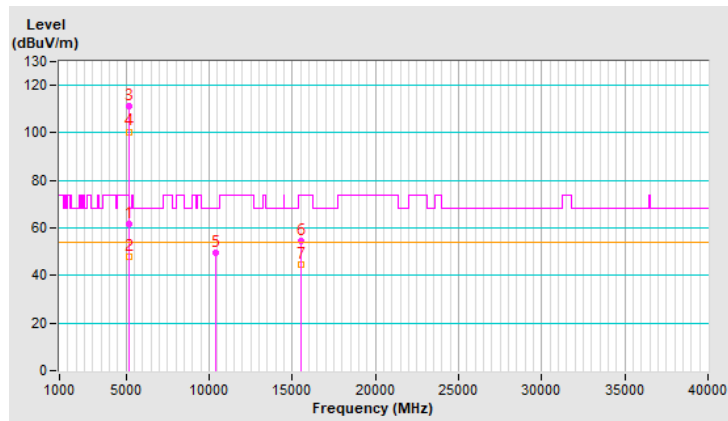


RF Mode	TX 802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	116.4 PK			1.08 H	289	114.3	2.1
2	*5200.00	105.9 AV			1.08 H	289	103.8	2.1
3	#10400.00	57.8 PK	68.2	-10.4	1.58 H	281	45.9	11.9
4	15600.00	49.3 PK	74.0	-24.7	1.52 H	301	37.8	11.5
5	15600.00	38.1 AV	54.0	-15.9	1.52 H	301	26.6	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

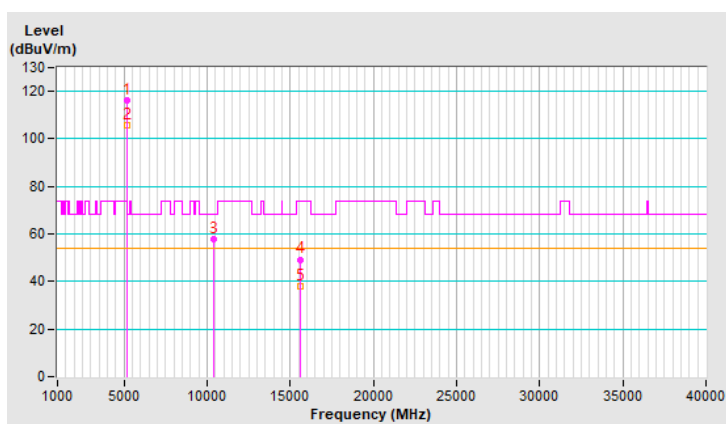


RF Mode	TX 802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	113.0 PK			3.12 V	107	110.9	2.1
2	*5200.00	101.9 AV			3.12 V	107	99.8	2.1
3	#10400.00	49.6 PK	68.2	-18.6	1.51 V	275	37.7	11.9
4	15600.00	54.3 PK	74.0	-19.7	2.36 V	266	42.8	11.5
5	15600.00	44.4 AV	54.0	-9.6	2.36 V	266	32.9	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

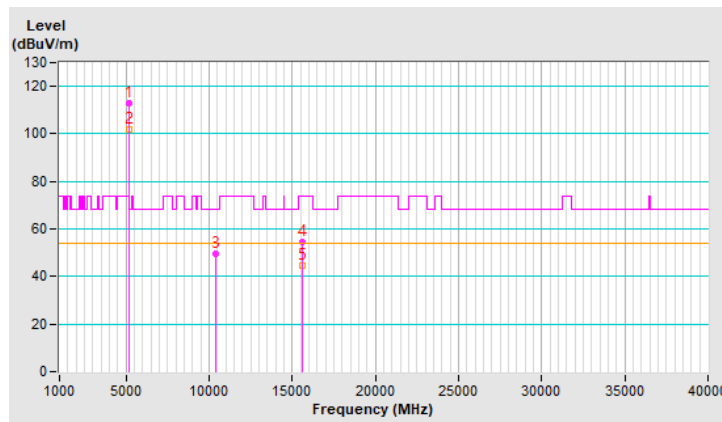


RF Mode	TX 802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	115.0 PK			1.02 H	290	113.1	1.9
2	*5240.00	104.2 AV			1.02 H	290	102.3	1.9
3	5350.00	52.4 PK	74.0	-21.6	1.02 H	290	50.4	2.0
4	5350.00	40.4 AV	54.0	-13.6	1.02 H	290	38.4	2.0
5	#10480.00	57.9 PK	68.2	-10.3	1.63 H	273	46.0	11.9
6	15720.00	49.1 PK	74.0	-24.9	1.55 H	290	37.4	11.7
7	15720.00	37.8 AV	54.0	-16.2	1.55 H	290	26.1	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

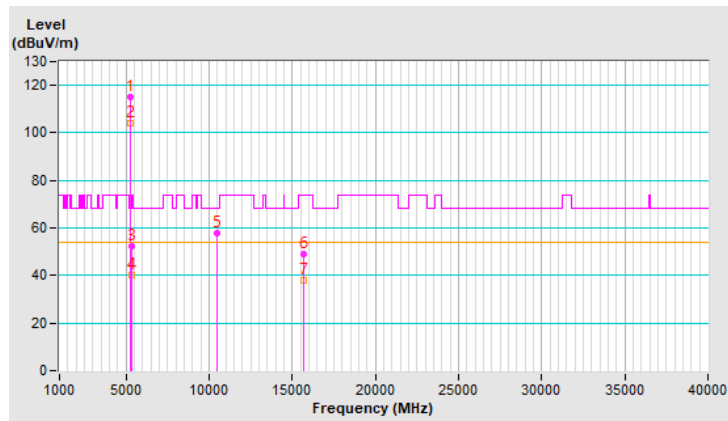




RF Mode	TX 802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	111.4 PK			3.07 V	119	109.5	1.9
2	*5240.00	100.5 AV			3.07 V	119	98.6	1.9
3	5350.00	50.8 PK	74.0	-23.2	3.07 V	119	48.8	2.0
4	5350.00	38.4 AV	54.0	-15.6	3.07 V	119	36.4	2.0
5	#10480.00	49.0 PK	68.2	-19.2	1.52 V	260	37.1	11.9
6	15720.00	54.4 PK	74.0	-19.6	2.31 V	250	42.7	11.7
7	15720.00	44.7 AV	54.0	-9.3	2.31 V	250	33.0	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

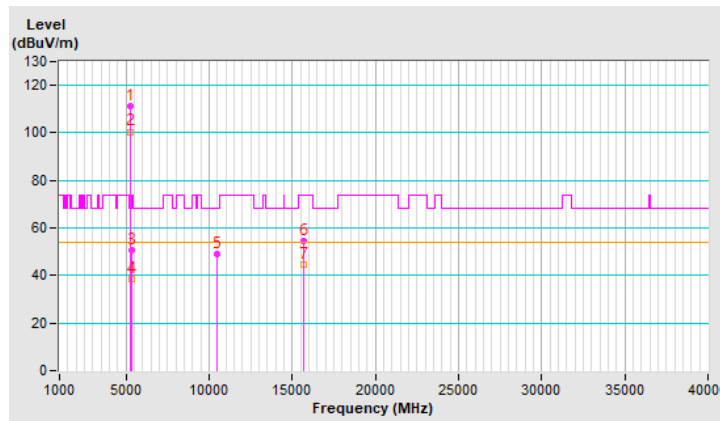


RF Mode	TX 802.11ax (HE20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.3 PK	74.0	-22.7	1.09 H	283	48.9	2.4
2	5150.00	39.2 AV	54.0	-14.8	1.09 H	283	36.8	2.4
3	*5260.00	115.8 PK			1.09 H	283	114.0	1.8
4	*5260.00	105.4 AV			1.09 H	283	103.6	1.8
5	#10520.00	55.5 PK	68.2	-12.7	1.78 H	283	43.5	12.0
6	15780.00	56.0 PK	74.0	-18.0	1.45 H	309	44.5	11.5
7	15780.00	42.9 AV	54.0	-11.1	1.45 H	309	31.4	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

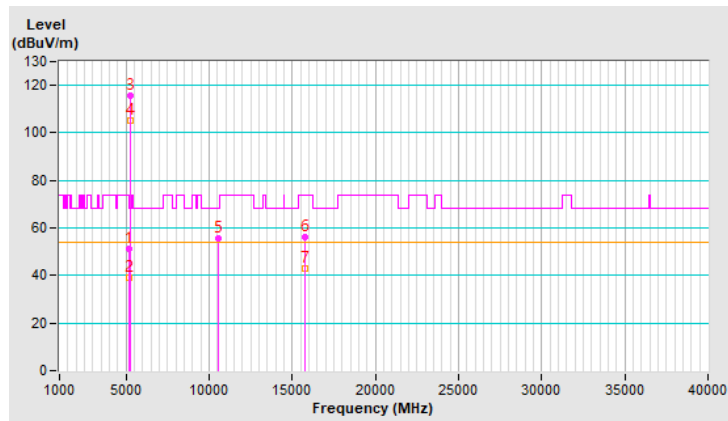


RF Mode	TX 802.11ax (HE20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.7 PK	74.0	-23.3	3.12 V	132	48.3	2.4
2	5150.00	38.6 AV	54.0	-15.4	3.12 V	132	36.2	2.4
3	*5260.00	112.5 PK			3.12 V	132	110.7	1.8
4	*5260.00	101.5 AV			3.12 V	132	99.7	1.8
5	#10520.00	47.8 PK	68.2	-20.4	1.65 V	307	35.8	12.0
6	15780.00	57.8 PK	74.0	-16.2	2.36 V	270	46.3	11.5
7	15780.00	45.8 AV	54.0	-8.2	2.36 V	270	34.3	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

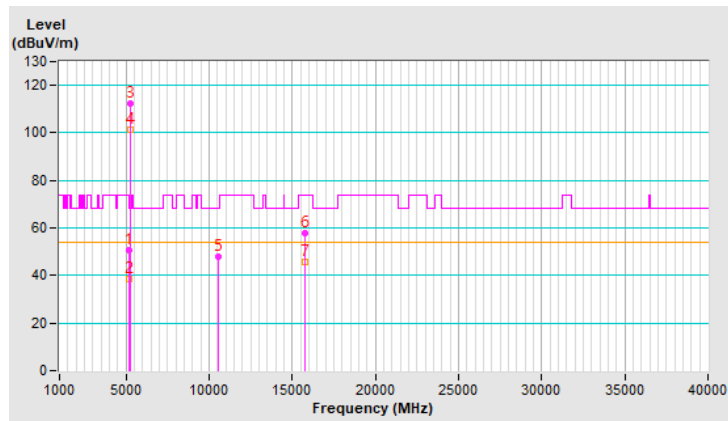


RF Mode	TX 802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	116.8 PK			1.13 H	288	115.1	1.7
2	*5300.00	106.2 AV			1.13 H	288	104.5	1.7
3	10600.00	57.8 PK	74.0	-16.2	1.74 H	272	46.1	11.7
4	10600.00	44.4 AV	54.0	-9.6	1.74 H	272	32.7	11.7
5	15900.00	56.0 PK	74.0	-18.0	1.45 H	318	44.9	11.1
6	15900.00	43.0 AV	54.0	-11.0	1.45 H	318	31.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

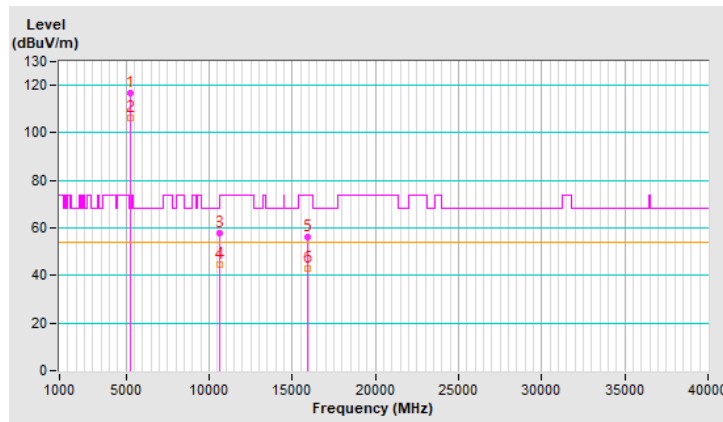


RF Mode	TX 802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	112.4 PK			3.03 V	120	110.7	1.7
2	*5300.00	101.3 AV			3.03 V	120	99.6	1.7
3	10600.00	48.2 PK	74.0	-25.8	1.60 V	293	36.5	11.7
4	10600.00	37.4 AV	54.0	-16.6	1.60 V	293	25.7	11.7
5	15900.00	57.6 PK	74.0	-16.4	2.32 V	276	46.5	11.1
6	15900.00	45.7 AV	54.0	-8.3	2.32 V	276	34.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

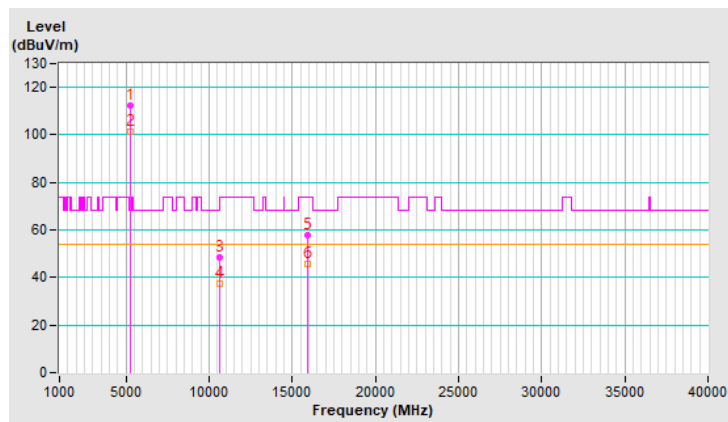




RF Mode	TX 802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	113.8 PK			1.04 H	285	112.1	1.7
2	*5320.00	103.0 AV			1.04 H	285	101.3	1.7
3	5350.00	68.9 PK	74.0	-5.1	1.04 H	285	66.9	2.0
4	5350.00	52.2 AV	54.0	-1.8	1.04 H	285	50.2	2.0
5	10640.00	55.2 PK	74.0	-18.8	1.69 H	254	43.6	11.6
6	10640.00	42.0 AV	54.0	-12.0	1.69 H	254	30.4	11.6
7	15960.00	53.3 PK	74.0	-20.7	1.38 H	285	41.9	11.4
8	15960.00	40.4 AV	54.0	-13.6	1.38 H	285	29.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

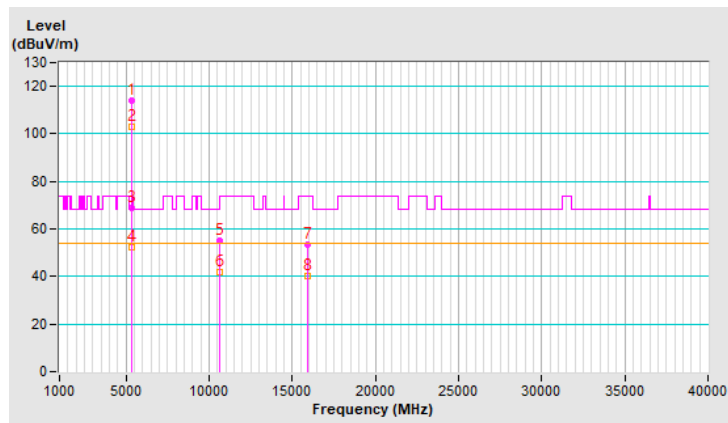




RF Mode	TX 802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	110.3 PK			3.02 V	124	108.6	1.7
2	*5320.00	99.7 AV			3.02 V	124	98.0	1.7
3	5350.00	60.4 PK	74.0	-13.6	3.02 V	124	58.4	2.0
4	5350.00	46.4 AV	54.0	-7.6	3.02 V	124	44.4	2.0
5	10640.00	48.3 PK	74.0	-25.7	1.71 V	312	36.7	11.6
6	10640.00	37.4 AV	54.0	-16.6	1.71 V	312	25.8	11.6
7	15960.00	52.8 PK	74.0	-21.2	2.32 V	265	41.4	11.4
8	15960.00	42.1 AV	54.0	-11.9	2.32 V	265	30.7	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

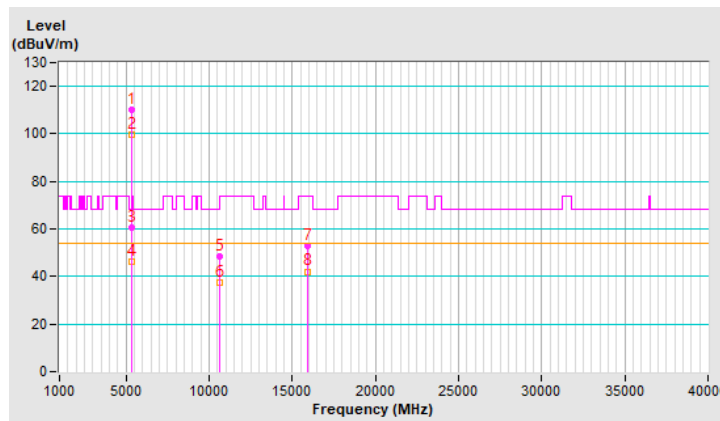


RF Mode	TX 802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.2 PK	74.0	-14.8	1.35 H	299	57.0	2.2
2	5460.00	43.3 AV	54.0	-10.7	1.35 H	299	41.1	2.2
3	#5468.50	66.4 PK	68.2	-1.8	1.35 H	299	64.2	2.2
4	*5500.00	111.1 PK			1.35 H	299	109.0	2.1
5	*5500.00	101.5 AV			1.35 H	299	99.4	2.1
6	11000.00	55.1 PK	74.0	-18.9	1.79 H	250	43.0	12.1
7	11000.00	43.5 AV	54.0	-10.5	1.79 H	250	31.4	12.1
8	#16500.00	53.1 PK	68.2	-15.1	1.40 H	288	39.7	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

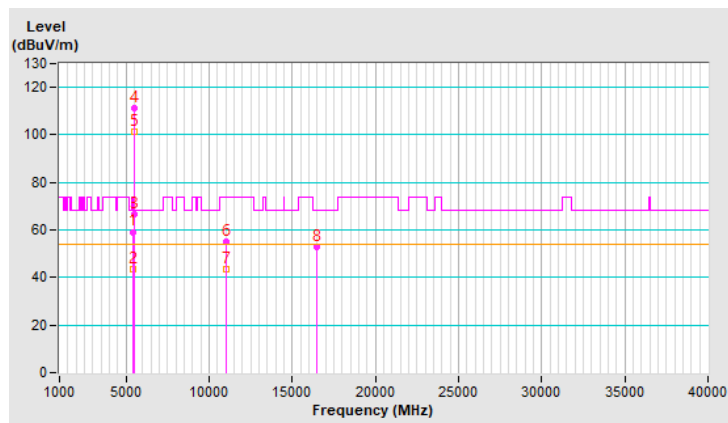


RF Mode	TX 802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.2 PK	74.0	-16.8	2.38 V	129	55.0	2.2
2	5460.00	41.1 AV	54.0	-12.9	2.38 V	129	38.9	2.2
3	#5470.00	62.7 PK	68.2	-5.5	2.38 V	129	60.5	2.2
4	*5500.00	108.1 PK			2.38 V	129	106.0	2.1
5	*5500.00	97.5 AV			2.38 V	129	95.4	2.1
6	11000.00	47.0 PK	74.0	-27.0	1.58 V	295	34.9	12.1
7	11000.00	36.5 AV	54.0	-17.5	1.58 V	295	24.4	12.1
8	#16500.00	55.4 PK	68.2	-12.8	2.40 V	281	42.0	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

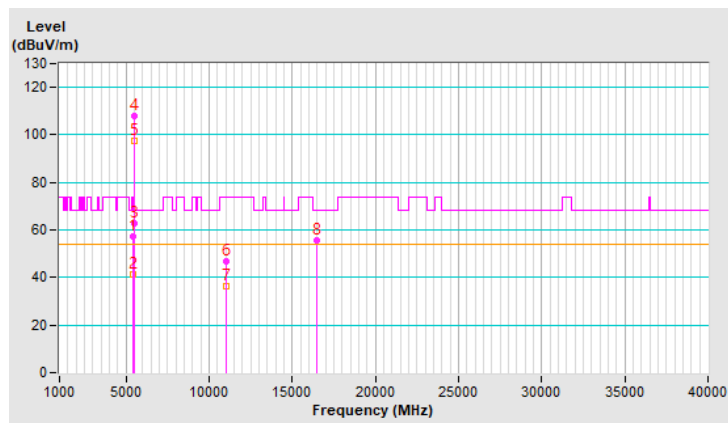


RF Mode	TX 802.11ax (HE20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	115.5 PK			1.04 H	286	113.3	2.2
2	*5580.00	105.9 AV			1.04 H	286	103.7	2.2
3	11160.00	55.6 PK	74.0	-18.4	1.78 H	252	43.7	11.9
4	11160.00	43.3 AV	54.0	-10.7	1.78 H	252	31.4	11.9
5	#16740.00	53.6 PK	68.2	-14.6	1.41 H	296	38.4	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

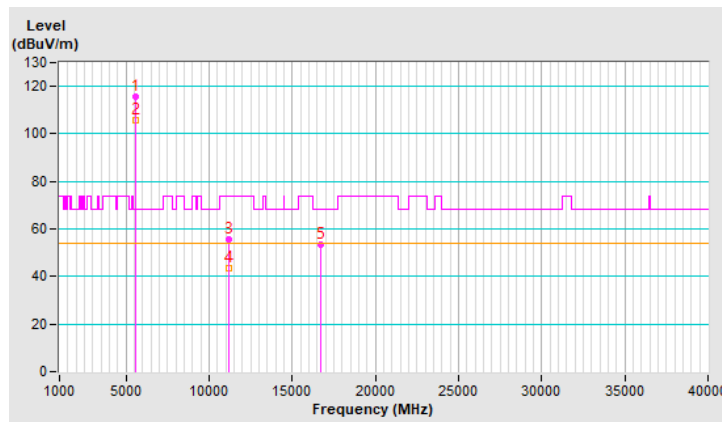


RF Mode	TX 802.11ax (HE20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	109.1 PK			2.42 V	143	106.9	2.2
2	*5580.00	100.2 AV			2.42 V	143	98.0	2.2
3	11160.00	46.9 PK	74.0	-27.1	1.62 V	318	35.0	11.9
4	11160.00	36.5 AV	54.0	-17.5	1.62 V	318	24.6	11.9
5	#16740.00	55.7 PK	68.2	-12.5	2.36 V	268	40.5	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

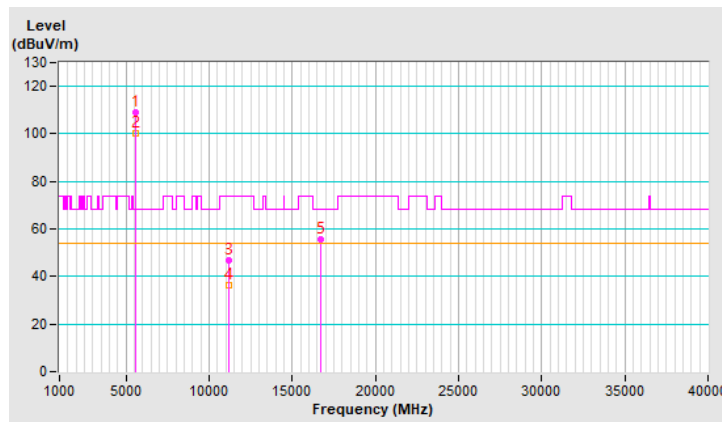


RF Mode	TX 802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.3 PK			1.06 H	290	110.0	2.3
2	*5700.00	101.5 AV			1.06 H	290	99.2	2.3
3	#5725.00	66.4 PK	68.2	-1.8	1.06 H	290	63.9	2.5
4	11400.00	54.4 PK	74.0	-19.6	1.63 H	245	42.2	12.2
5	11400.00	41.4 AV	54.0	-12.6	1.63 H	245	29.2	12.2
6	#17100.00	53.8 PK	68.2	-14.4	1.25 H	282	37.2	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

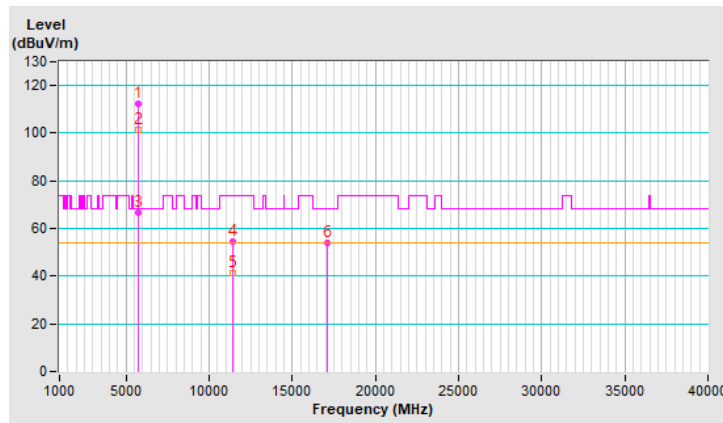


RF Mode	TX 802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	108.3 PK			2.41 V	129	106.0	2.3
2	*5700.00	97.4 AV			2.41 V	129	95.1	2.3
3	#5725.00	62.4 PK	68.2	-5.8	2.41 V	129	59.9	2.5
4	11400.00	47.0 PK	74.0	-27.0	1.65 V	307	34.8	12.2
5	11400.00	36.3 AV	54.0	-17.7	1.65 V	307	24.1	12.2
6	#17100.00	53.5 PK	68.2	-14.7	2.19 V	279	36.9	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

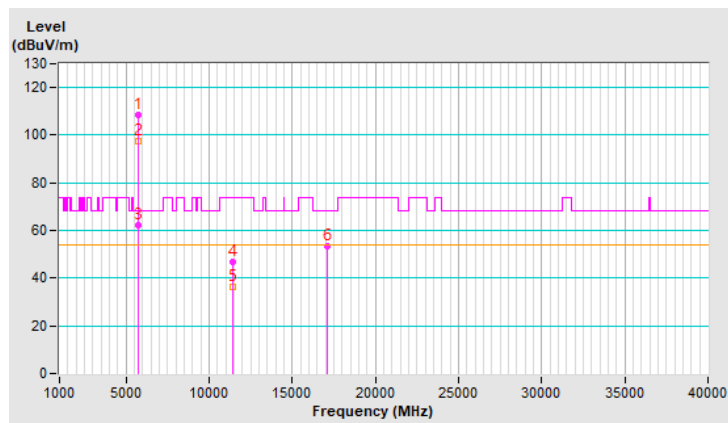


RF Mode	TX 802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	48.9 PK	74.0	-25.1	1.02 H	284	46.7	2.2
2	5460.00	37.6 AV	54.0	-16.4	1.02 H	284	35.4	2.2
3	#5470.00	49.9 PK	68.2	-18.3	1.02 H	284	47.7	2.2
4	*5720.00	115.7 PK			1.02 H	284	113.3	2.4
5	*5720.00	106.0 AV			1.02 H	284	103.6	2.4
6	#5850.00	50.5 PK	68.2	-17.7	1.02 H	284	47.6	2.9
7	11440.00	55.3 PK	74.0	-18.7	1.73 H	258	43.1	12.2
8	11440.00	43.2 AV	54.0	-10.8	1.73 H	258	31.0	12.2
9	#17160.00	53.5 PK	68.2	-14.7	1.38 H	289	37.0	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

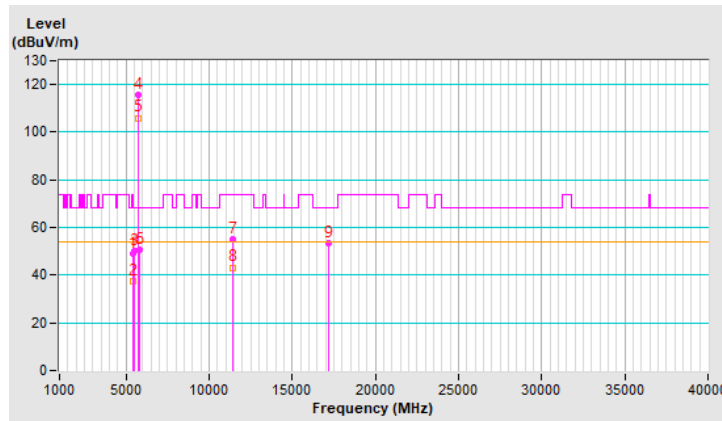


RF Mode	TX 802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.2 PK	74.0	-24.8	2.42 V	127	47.0	2.2
2	5460.00	37.8 AV	54.0	-16.2	2.42 V	127	35.6	2.2
3	#5470.00	49.5 PK	68.2	-18.7	2.42 V	127	47.3	2.2
4	*5720.00	109.9 PK			2.42 V	127	107.5	2.4
5	*5720.00	100.7 AV			2.42 V	127	98.3	2.4
6	#5850.00	50.5 PK	68.2	-17.7	2.42 V	127	47.6	2.9
7	11440.00	49.8 PK	74.0	-24.2	1.57 V	330	37.6	12.2
8	11440.00	38.6 AV	54.0	-15.4	1.57 V	330	26.4	12.2
9	#17160.00	55.2 PK	68.2	-13.0	2.32 V	271	38.7	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

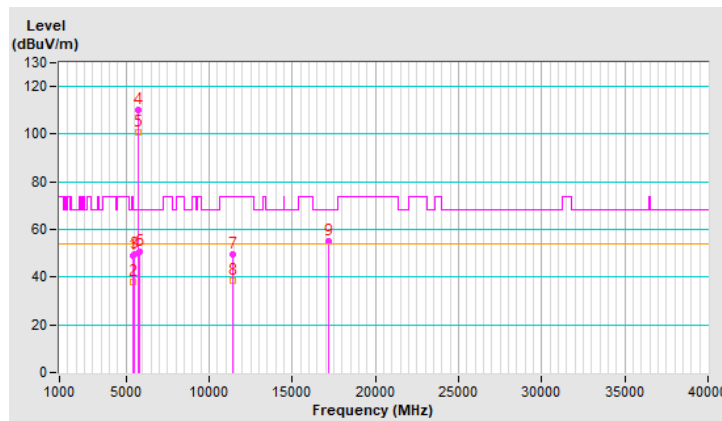


RF Mode	TX 802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5629.19	51.8 PK	68.2	-16.4	1.04 H	299	49.5	2.3
2	*5745.00	116.9 PK			1.04 H	299	114.4	2.5
3	*5745.00	106.1 AV			1.04 H	299	103.6	2.5
4	#5989.07	51.2 PK	68.2	-17.0	1.04 H	299	48.3	2.9
5	11490.00	52.5 PK	74.0	-21.5	1.63 H	280	40.1	12.4
6	11490.00	41.5 AV	54.0	-12.5	1.63 H	280	29.1	12.4
7	#17235.00	57.2 PK	68.2	-11.0	2.93 H	96	40.5	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

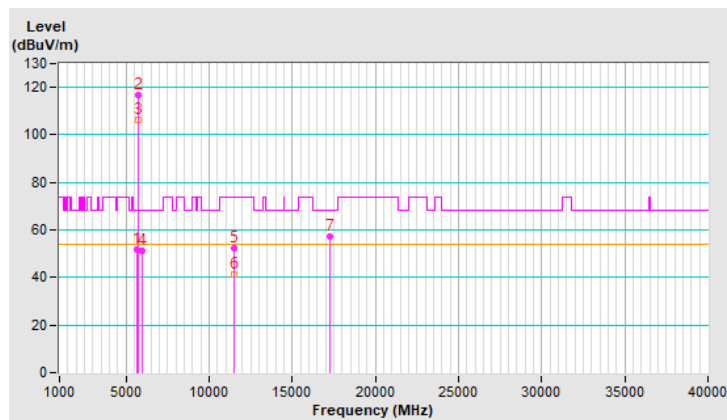




RF Mode	TX 802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5632.47	50.4 PK	68.2	-17.8	3.15 V	100	48.1	2.3
2	*5745.00	110.3 PK			3.15 V	100	107.8	2.5
3	*5745.00	99.3 AV			3.15 V	100	96.8	2.5
4	#6022.59	51.0 PK	68.2	-17.2	3.15 V	100	48.0	3.0
5	11490.00	56.8 PK	74.0	-17.2	1.22 V	281	44.4	12.4
6	11490.00	45.3 AV	54.0	-8.7	1.22 V	281	32.9	12.4
7	#17235.00	54.6 PK	68.2	-13.6	3.46 V	220	37.9	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

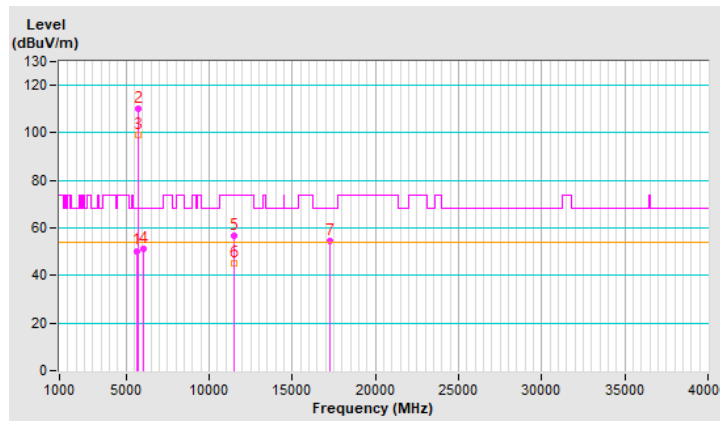




RF Mode	TX 802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5607.17	51.2 PK	68.2	-17.0	1.07 H	289	49.0	2.2
2	*5785.00	114.9 PK			1.07 H	289	112.2	2.7
3	*5785.00	104.0 AV			1.07 H	289	101.3	2.7
4	#5984.09	51.6 PK	68.2	-16.6	1.07 H	289	48.7	2.9
5	11570.00	53.4 PK	74.0	-20.6	1.60 H	269	41.0	12.4
6	11570.00	42.4 AV	54.0	-11.6	1.60 H	269	30.0	12.4
7	#17355.00	56.3 PK	68.2	-11.9	2.95 H	71	38.7	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

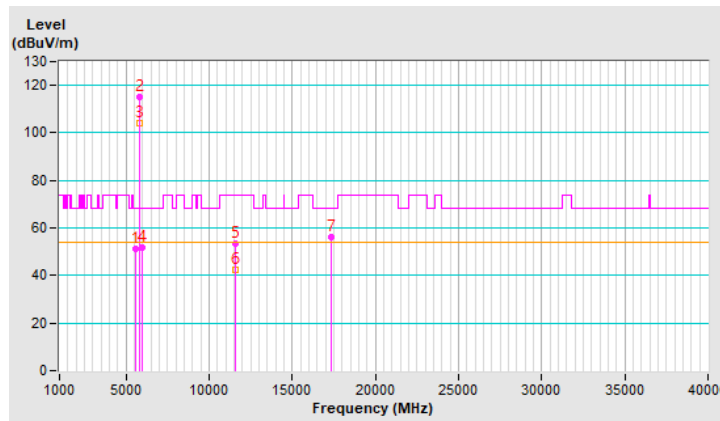




RF Mode	TX 802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5579.78	50.4 PK	68.2	-17.8	3.09 V	150	48.2	2.2
2	*5785.00	109.6 PK			3.09 V	150	106.9	2.7
3	*5785.00	98.2 AV			3.09 V	150	95.5	2.7
4	#6004.55	50.7 PK	68.2	-17.5	3.09 V	150	47.8	2.9
5	11570.00	57.2 PK	74.0	-16.8	1.13 V	291	44.8	12.4
6	11570.00	45.8 AV	54.0	-8.2	1.13 V	291	33.4	12.4
7	#17355.00	55.4 PK	68.2	-12.8	3.42 V	211	37.8	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

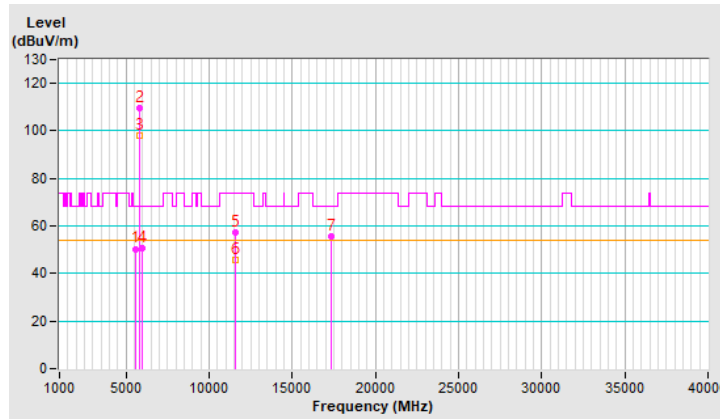


RF Mode	TX 802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5582.29	51.0 PK	68.2	-17.2	1.10 H	300	48.8	2.2
2	*5825.00	115.4 PK			1.10 H	300	112.6	2.8
3	*5825.00	104.8 AV			1.10 H	300	102.0	2.8
4	#5943.06	51.9 PK	68.2	-16.3	1.10 H	300	49.0	2.9
5	11650.00	52.8 PK	74.0	-21.2	1.60 H	277	40.9	11.9
6	11650.00	41.9 AV	54.0	-12.1	1.60 H	277	30.0	11.9
7	#17475.00	56.8 PK	68.2	-11.4	2.91 H	87	38.3	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

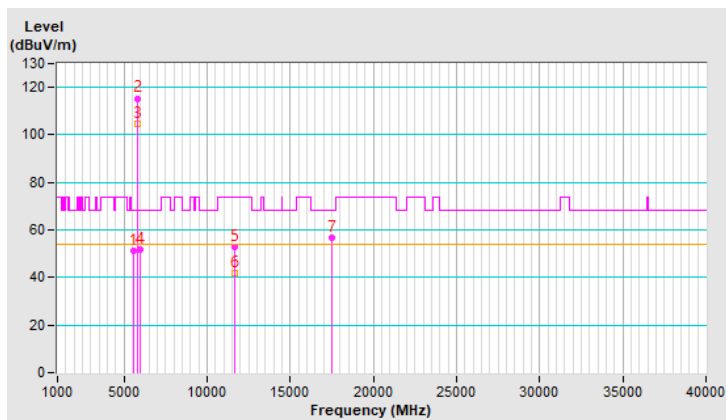


RF Mode	TX 802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5586.55	50.8 PK	68.2	-17.4	2.42 V	136	48.6	2.2
2	*5825.00	106.6 PK			2.42 V	136	103.8	2.8
3	*5825.00	96.6 AV			2.42 V	136	93.8	2.8
4	#6007.06	51.1 PK	68.2	-17.1	2.42 V	136	48.2	2.9
5	11650.00	56.7 PK	74.0	-17.3	1.17 V	286	44.8	11.9
6	11650.00	45.1 AV	54.0	-8.9	1.17 V	286	33.2	11.9
7	#17475.00	54.4 PK	68.2	-13.8	3.44 V	210	35.9	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

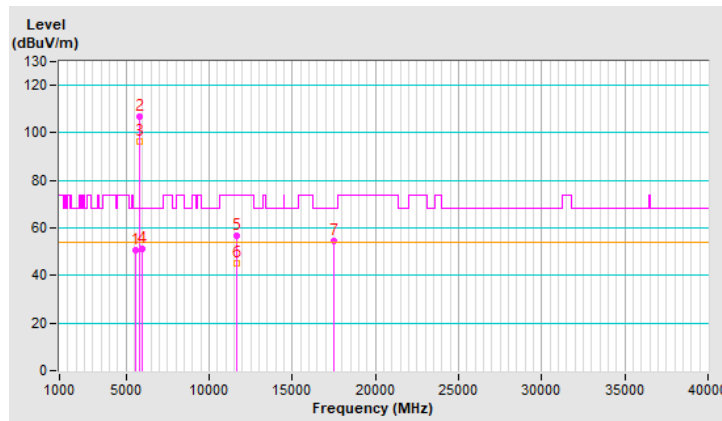


RF Mode	TX 802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.8 PK	74.0	-4.2	1.01 H	283	67.4	2.4
2	5150.00	52.3 AV	54.0	-1.7	1.01 H	283	49.9	2.4
3	*5190.00	109.2 PK			1.01 H	283	107.0	2.2
4	*5190.00	97.5 AV			1.01 H	283	95.3	2.2
5	#10380.00	50.7 PK	68.2	-17.5	1.63 H	277	38.9	11.8
6	15570.00	47.5 PK	74.0	-26.5	1.55 H	315	35.7	11.8
7	15570.00	36.7 AV	54.0	-17.3	1.55 H	315	24.9	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

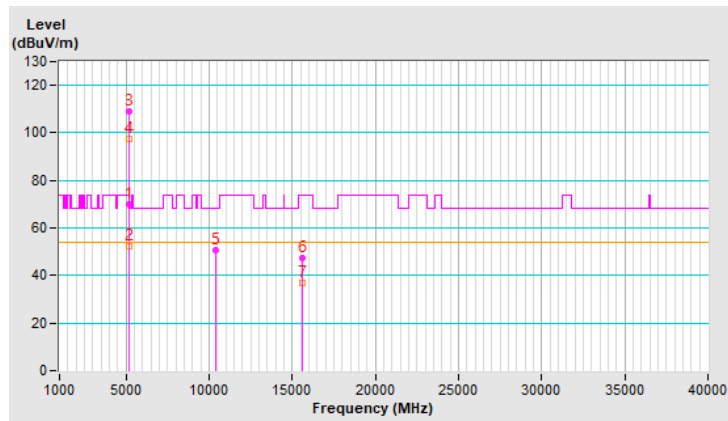




RF Mode	TX 802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.2 PK	74.0	-7.8	3.20 V	135	63.8	2.4
2	5150.00	47.4 AV	54.0	-6.6	3.20 V	135	45.0	2.4
3	*5190.00	104.6 PK			3.20 V	135	102.4	2.2
4	*5190.00	93.7 AV			3.20 V	135	91.5	2.2
5	#10380.00	48.8 PK	68.2	-19.4	1.56 V	297	37.0	11.8
6	15570.00	49.7 PK	74.0	-24.3	2.33 V	252	37.9	11.8
7	15570.00	40.2 AV	54.0	-13.8	2.33 V	252	28.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

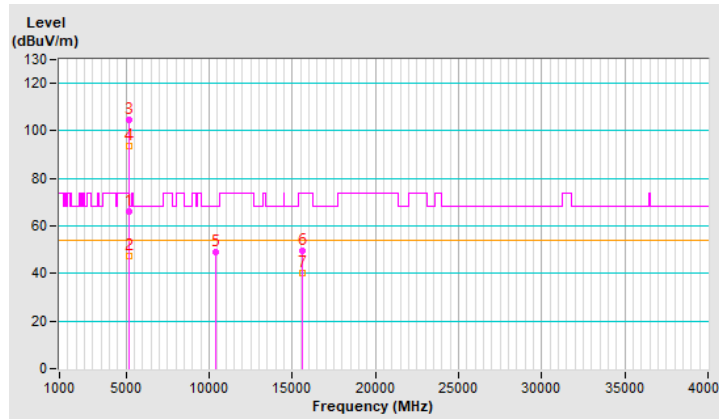


RF Mode	TX 802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	5150.00	65.4 PK	74.0	-8.6	1.13 H	281	63.0	2.4
2	5150.00	45.3 AV	54.0	-8.7	1.13 H	281	42.9	2.4
3	*5230.00	112.4 PK			1.13 H	281	110.4	2.0
4	*5230.00	101.0 AV			1.13 H	281	99.0	2.0
5	5350.00	57.4 PK	74.0	-16.6	1.13 H	281	55.4	2.0
6	5350.00	39.4 AV	54.0	-14.6	1.13 H	281	37.4	2.0
7	#10460.00	53.2 PK	68.2	-15.0	1.63 H	288	41.2	12.0
8	15690.00	47.8 PK	74.0	-26.2	1.49 H	321	35.9	11.9
9	15690.00	38.8 AV	54.0	-15.2	1.49 H	321	26.9	11.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

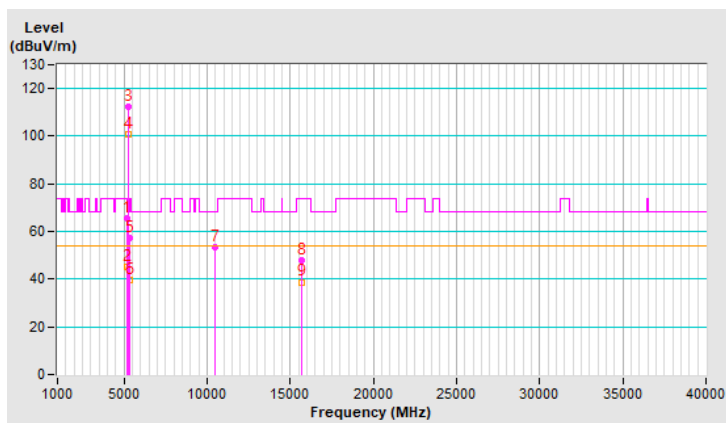




RF Mode	TX 802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.7 PK	74.0	-16.3	3.22 V	126	55.3	2.4
2	5150.00	40.6 AV	54.0	-13.4	3.22 V	126	38.2	2.4
3	*5230.00	108.1 PK			3.22 V	126	106.1	2.0
4	*5230.00	97.3 AV			3.22 V	126	95.3	2.0
5	5350.00	55.4 PK	74.0	-18.6	3.22 V	126	53.4	2.0
6	5350.00	39.1 AV	54.0	-14.9	3.22 V	126	37.1	2.0
7	#10460.00	48.8 PK	68.2	-19.4	1.54 V	283	36.8	12.0
8	15690.00	52.4 PK	74.0	-21.6	2.36 V	261	40.5	11.9
9	15690.00	43.7 AV	54.0	-10.3	2.36 V	261	31.8	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

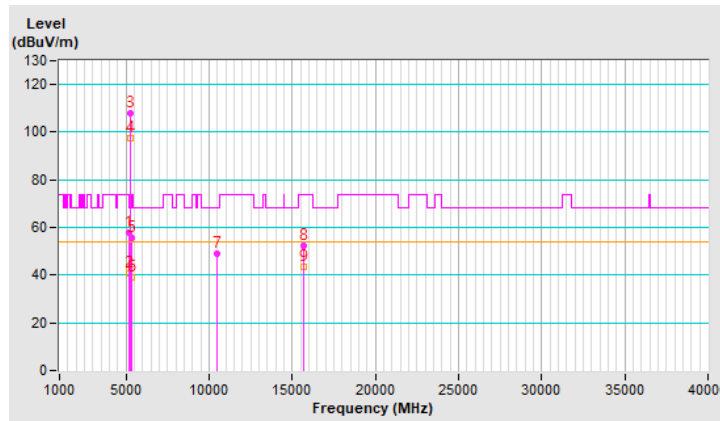


RF Mode	TX 802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.1 PK	74.0	-16.9	1.15 H	279	54.7	2.4
2	5150.00	40.4 AV	54.0	-13.6	1.15 H	279	38.0	2.4
3	*5270.00	113.4 PK			1.15 H	279	111.6	1.8
4	*5270.00	102.6 AV			1.15 H	279	100.8	1.8
5	5350.00	70.7 PK	74.0	-3.3	1.15 H	279	68.7	2.0
6	5350.00	52.3 AV	54.0	-1.7	1.15 H	279	50.3	2.0
7	#10540.00	53.5 PK	68.2	-14.7	1.58 H	274	41.6	11.9
8	15810.00	47.6 PK	74.0	-26.4	1.54 H	310	36.2	11.4
9	15810.00	38.8 AV	54.0	-15.2	1.54 H	310	27.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

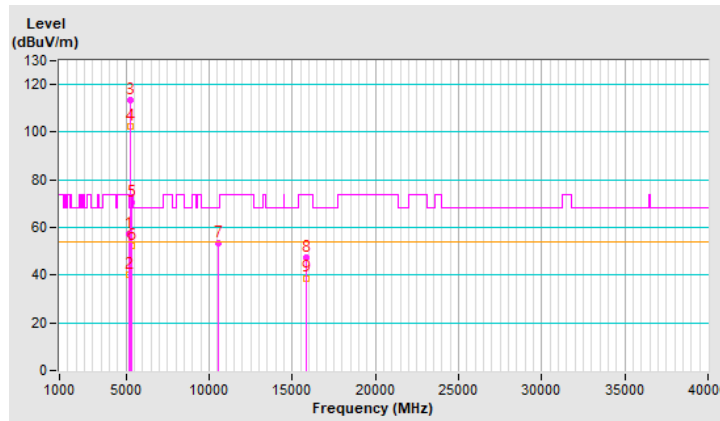


RF Mode	TX 802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.8 PK	74.0	-18.2	2.96 V	114	53.4	2.4
2	5150.00	39.4 AV	54.0	-14.6	2.96 V	114	37.0	2.4
3	*5270.00	109.7 PK			2.96 V	114	107.9	1.8
4	*5270.00	98.6 AV			2.96 V	114	96.8	1.8
5	5350.00	66.3 PK	74.0	-7.7	2.96 V	114	64.3	2.0
6	5350.00	47.6 AV	54.0	-6.4	2.96 V	114	45.6	2.0
7	#10540.00	49.1 PK	68.2	-19.1	1.55 V	285	37.2	11.9
8	15810.00	52.4 PK	74.0	-21.6	2.31 V	259	41.0	11.4
9	15810.00	43.7 AV	54.0	-10.3	2.31 V	259	32.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

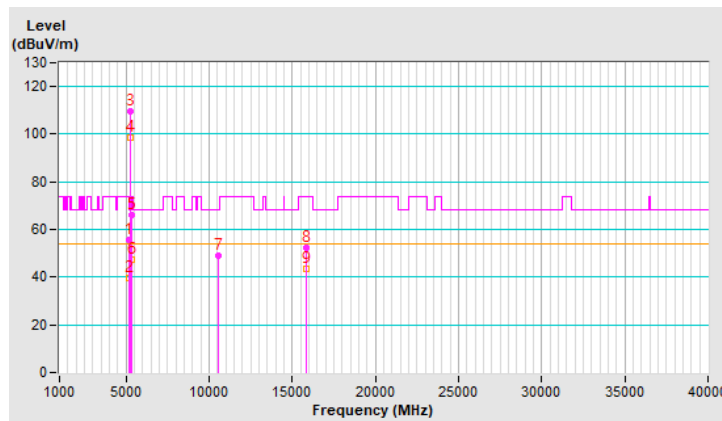


RF Mode	TX 802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	109.8 PK			1.08 H	285	108.1	1.7
2	*5310.00	98.2 AV			1.08 H	285	96.5	1.7
3	5350.00	71.0 PK	74.0	-3.0	1.08 H	285	69.0	2.0
4	5350.00	52.3 AV	54.0	-1.7	1.08 H	285	50.3	2.0
5	10620.00	52.8 PK	74.0	-21.2	1.69 H	303	41.2	11.6
6	10620.00	41.2 AV	54.0	-12.8	1.69 H	303	29.6	11.6
7	15930.00	48.0 PK	74.0	-26.0	1.48 H	310	36.7	11.3
8	15930.00	39.2 AV	54.0	-14.8	1.48 H	310	27.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

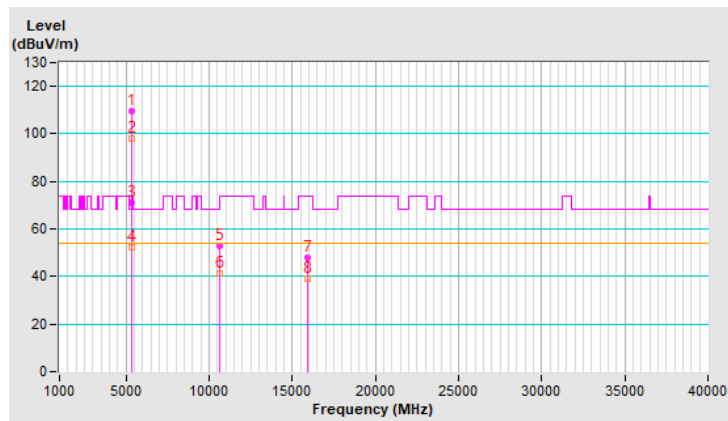


RF Mode	TX 802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	106.2 PK			2.95 V	120	104.5	1.7
2	*5310.00	94.5 AV			2.95 V	120	92.8	1.7
3	5350.00	67.0 PK	74.0	-7.0	2.95 V	120	65.0	2.0
4	5350.00	46.5 AV	54.0	-7.5	2.95 V	120	44.5	2.0
5	10620.00	48.7 PK	74.0	-25.3	1.49 V	277	37.1	11.6
6	10620.00	38.1 AV	54.0	-15.9	1.49 V	277	26.5	11.6
7	15930.00	49.9 PK	74.0	-24.1	2.41 V	272	38.6	11.3
8	15930.00	40.5 AV	54.0	-13.5	2.41 V	272	29.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

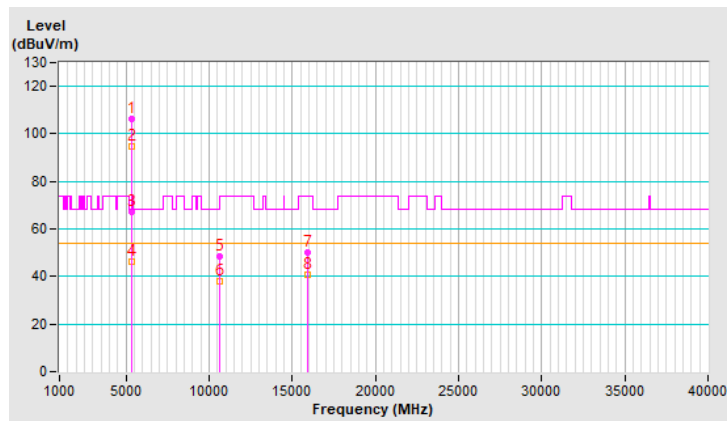


RF Mode	TX 802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.8 PK	74.0	-14.2	1.12 H	299	57.6	2.2
2	5460.00	45.2 AV	54.0	-8.8	1.12 H	299	43.0	2.2
3	#5470.00	66.5 PK	68.2	-1.7	1.12 H	299	64.3	2.2
4	*5510.00	106.7 PK			1.12 H	299	104.6	2.1
5	*5510.00	95.0 AV			1.12 H	299	92.9	2.1
6	11020.00	52.6 PK	74.0	-21.4	1.74 H	295	40.5	12.1
7	11020.00	40.7 AV	54.0	-13.3	1.74 H	295	28.6	12.1
8	#16530.00	47.9 PK	68.2	-20.3	1.48 H	303	34.2	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

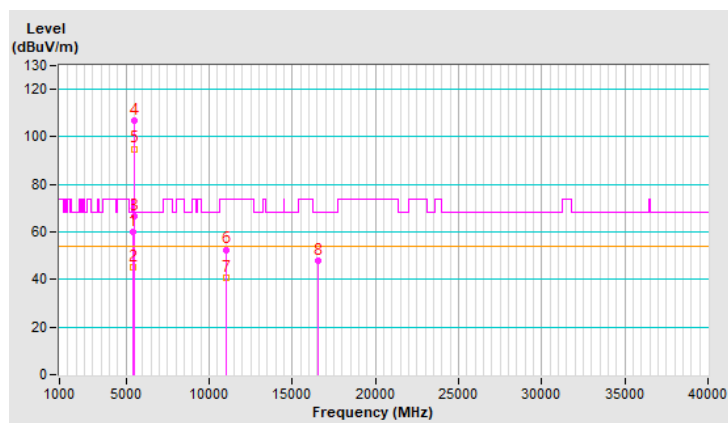


RF Mode	TX 802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.7 PK	74.0	-20.3	2.26 V	126	51.5	2.2
2	5460.00	41.1 AV	54.0	-12.9	2.26 V	126	38.9	2.2
3	#5470.00	63.9 PK	68.2	-4.3	2.26 V	126	61.7	2.2
4	*5510.00	103.5 PK			2.26 V	126	101.4	2.1
5	*5510.00	92.1 AV			2.26 V	126	90.0	2.1
6	11020.00	48.5 PK	74.0	-25.5	1.54 V	275	36.4	12.1
7	11020.00	37.7 AV	54.0	-16.3	1.54 V	275	25.6	12.1
8	#16530.00	50.4 PK	68.2	-17.8	2.38 V	269	36.7	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

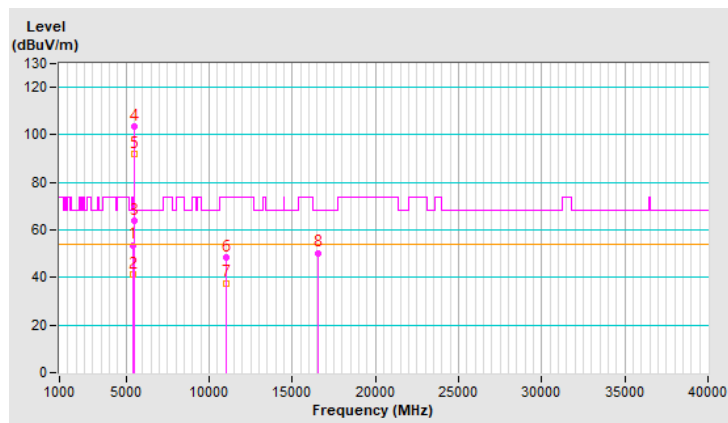


RF Mode	TX 802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.1 PK	74.0	-15.9	1.26 H	297	55.9	2.2
2	5460.00	43.4 AV	54.0	-10.6	1.26 H	297	41.2	2.2
3	#5470.00	63.2 PK	68.2	-5.0	1.26 H	297	61.0	2.2
4	*5550.00	111.4 PK			1.26 H	297	109.2	2.2
5	*5550.00	100.5 AV			1.26 H	297	98.3	2.2
6	11100.00	54.5 PK	74.0	-19.5	1.63 H	299	42.6	11.9
7	11100.00	43.9 AV	54.0	-10.1	1.63 H	299	32.0	11.9
8	#16650.00	48.3 PK	68.2	-19.9	1.49 H	317	33.6	14.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

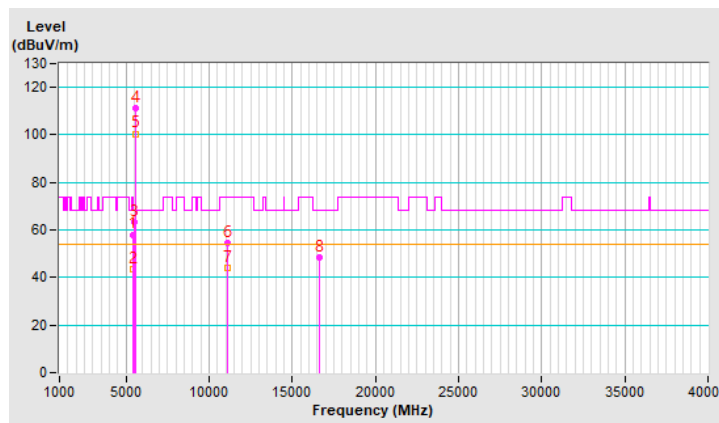




RF Mode	TX 802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.4 PK	74.0	-23.6	2.29 V	136	48.2	2.2
2	5460.00	38.7 AV	54.0	-15.3	2.29 V	136	36.5	2.2
3	#5470.00	60.1 PK	68.2	-8.1	2.29 V	136	57.9	2.2
4	*5550.00	108.6 PK			2.29 V	136	106.4	2.2
5	*5550.00	97.2 AV			2.29 V	136	95.0	2.2
6	11100.00	49.2 PK	74.0	-24.8	1.51 V	272	37.3	11.9
7	11100.00	38.5 AV	54.0	-15.5	1.51 V	272	26.6	11.9
8	#16650.00	52.2 PK	68.2	-16.0	2.26 V	256	37.5	14.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

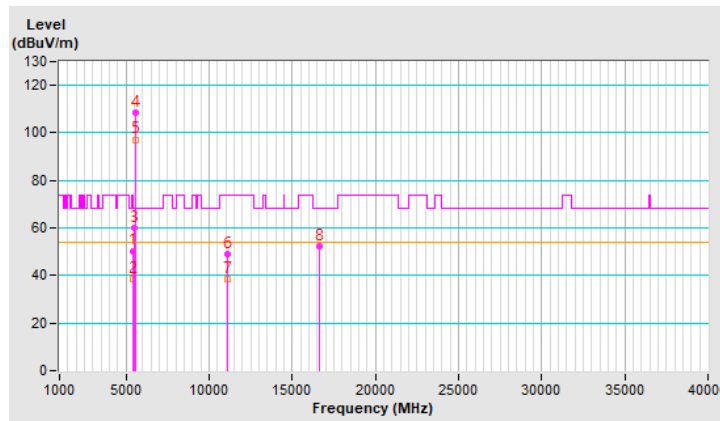


RF Mode	TX 802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	109.8 PK			1.17 H	301	107.6	2.2
2	*5670.00	98.1 AV			1.17 H	301	95.9	2.2
3	#5725.00	66.4 PK	68.2	-1.8	1.17 H	301	63.9	2.5
4	11340.00	52.5 PK	74.0	-21.5	1.75 H	308	40.4	12.1
5	11340.00	40.7 AV	54.0	-13.3	1.75 H	308	28.6	12.1
6	#17010.00	47.7 PK	68.2	-20.5	1.42 H	318	31.2	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

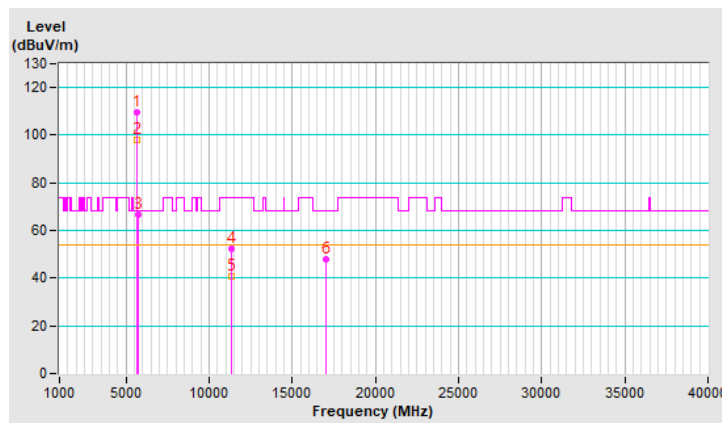


RF Mode	TX 802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	106.0 PK			2.26 V	111	103.8	2.2
2	*5670.00	94.6 AV			2.26 V	111	92.4	2.2
3	#5725.00	63.9 PK	68.2	-4.3	2.26 V	111	61.4	2.5
4	11340.00	48.4 PK	74.0	-25.6	1.57 V	283	36.3	12.1
5	11340.00	37.5 AV	54.0	-16.5	1.57 V	283	25.4	12.1
6	#17010.00	50.9 PK	68.2	-17.3	2.32 V	260	34.4	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

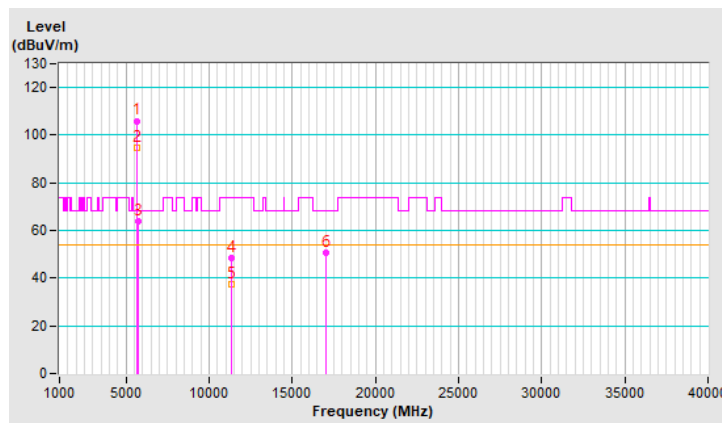


RF Mode	TX 802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.4 PK	74.0	-23.6	1.08 H	296	48.2	2.2
2	5460.00	37.5 AV	54.0	-16.5	1.08 H	296	35.3	2.2
3	#5470.00	51.2 PK	68.2	-17.0	1.08 H	296	49.0	2.2
4	*5710.00	113.5 PK			1.08 H	296	111.1	2.4
5	*5710.00	101.9 AV			1.08 H	296	99.5	2.4
6	#5850.00	58.6 PK	68.2	-9.6	1.08 H	296	55.7	2.9
7	11420.00	54.6 PK	74.0	-19.4	1.65 H	295	42.3	12.3
8	11420.00	44.2 AV	54.0	-9.8	1.65 H	295	31.9	12.3
9	#17130.00	48.0 PK	68.2	-20.2	1.46 H	311	31.4	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

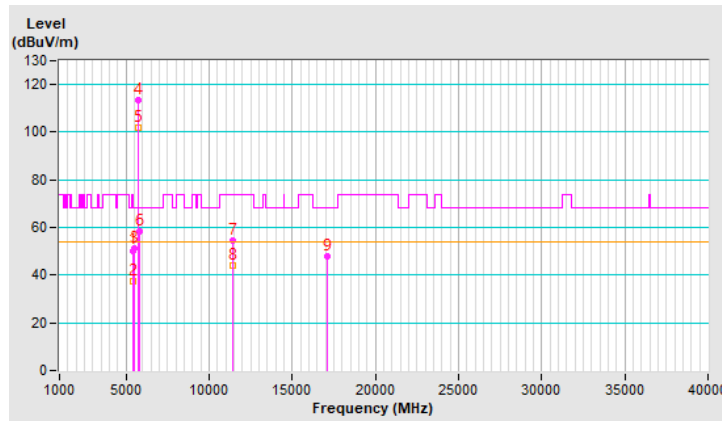


RF Mode	TX 802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.6 PK	74.0	-23.4	2.25 V	123	48.4	2.2
2	5460.00	37.8 AV	54.0	-16.2	2.25 V	123	35.6	2.2
3	#5470.00	51.0 PK	68.2	-17.2	2.25 V	123	48.8	2.2
4	*5710.00	108.2 PK			2.25 V	123	105.8	2.4
5	*5710.00	96.9 AV			2.25 V	123	94.5	2.4
6	#5850.00	55.4 PK	68.2	-12.8	2.25 V	123	52.5	2.9
7	11420.00	49.2 PK	74.0	-24.8	1.51 V	276	36.9	12.3
8	11420.00	38.2 AV	54.0	-15.8	1.51 V	276	25.9	12.3
9	#17130.00	52.2 PK	68.2	-16.0	2.23 V	258	35.6	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

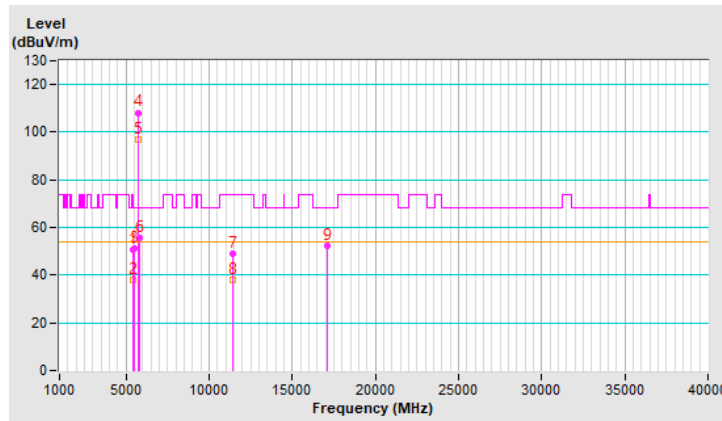


RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.53	61.9 PK	68.2	-6.3	1.09 H	297	59.6	2.3
2	*5755.00	113.3 PK			1.09 H	297	110.7	2.6
3	*5755.00	101.2 AV			1.09 H	297	98.6	2.6
4	#5947.54	52.4 PK	68.2	-15.8	1.09 H	297	49.5	2.9
5	11510.00	47.5 PK	74.0	-26.5	1.55 H	281	35.1	12.4
6	11510.00	36.9 AV	54.0	-17.1	1.55 H	281	24.5	12.4
7	#17265.00	51.2 PK	68.2	-17.0	2.90 H	76	34.4	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

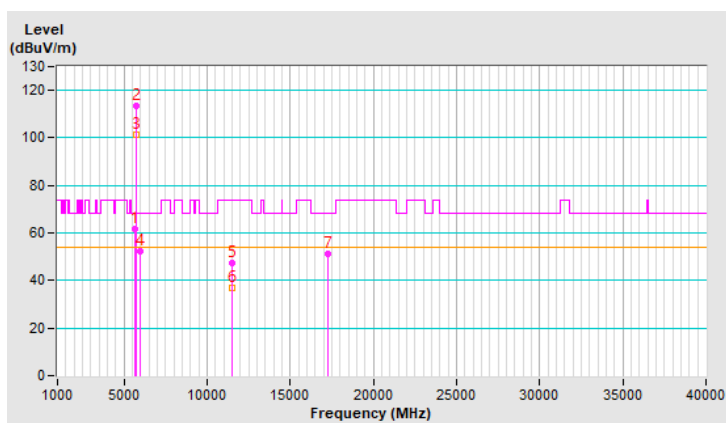




RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.37	55.4 PK	68.2	-12.8	3.21 V	106	53.1	2.3
2	*5755.00	106.5 PK			3.21 V	106	103.9	2.6
3	*5755.00	95.1 AV			3.21 V	106	92.5	2.6
4	#5947.42	50.9 PK	68.2	-17.3	3.21 V	106	48.0	2.9
5	11510.00	51.3 PK	74.0	-22.7	1.22 V	292	38.9	12.4
6	11510.00	40.4 AV	54.0	-13.6	1.22 V	292	28.0	12.4
7	#17265.00	49.8 PK	68.2	-18.4	3.39 V	206	33.0	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

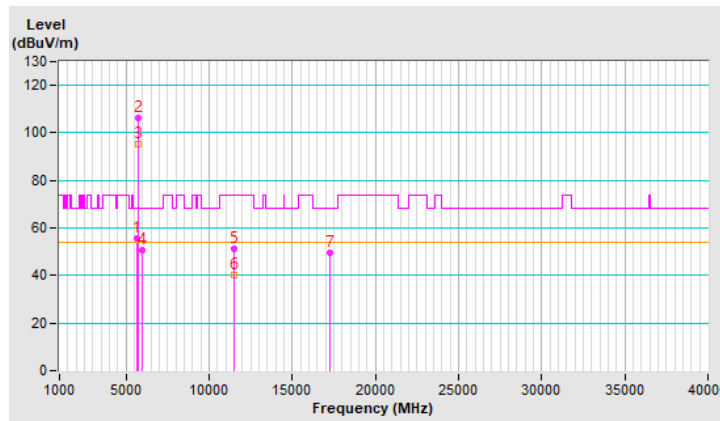


RF Mode	TX 802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5637.01	53.3 PK	68.2	-14.9	1.10 H	292	51.0	2.3
2	*5795.00	113.0 PK			1.10 H	292	110.3	2.7
3	*5795.00	101.1 AV			1.10 H	292	98.4	2.7
4	#5927.65	59.7 PK	68.2	-8.5	1.10 H	292	56.8	2.9
5	11590.00	48.1 PK	74.0	-25.9	1.59 H	280	35.8	12.3
6	11590.00	37.3 AV	54.0	-16.7	1.59 H	280	25.0	12.3
7	#17385.00	51.8 PK	68.2	-16.4	2.84 H	68	34.0	17.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

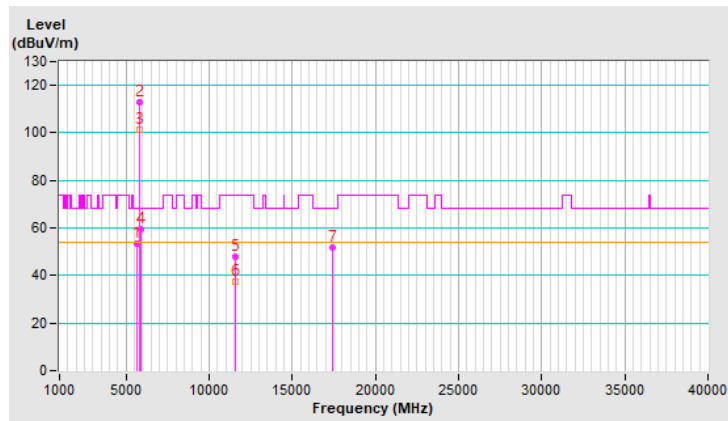




RF Mode	TX 802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5620.66	50.9 PK	68.2	-17.3	3.11 V	144	48.7	2.2
2	*5795.00	106.1 PK			3.11 V	144	103.4	2.7
3	*5795.00	94.9 AV			3.11 V	144	92.2	2.7
4	#5931.78	56.3 PK	68.2	-11.9	3.11 V	144	53.4	2.9
5	11590.00	51.1 PK	74.0	-22.9	1.23 V	293	38.8	12.3
6	11590.00	40.0 AV	54.0	-14.0	1.23 V	293	27.7	12.3
7	#17385.00	50.0 PK	68.2	-18.2	3.41 V	202	32.2	17.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

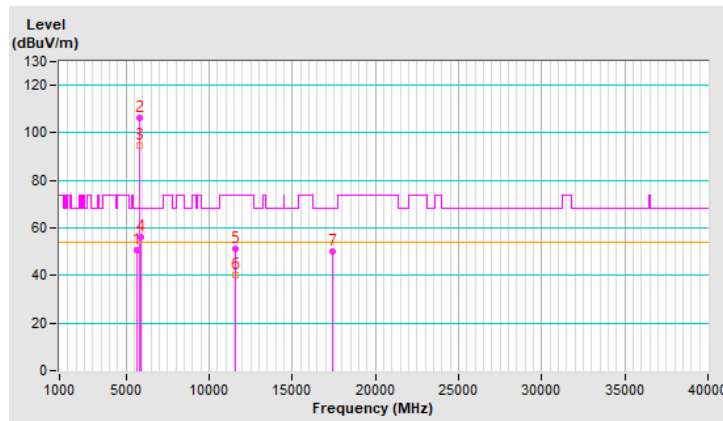


RF Mode	TX 802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5125.20	65.6 PK	74.0	-8.4	1.20 H	275	63.2	2.4
2	5125.20	52.3 AV	54.0	-1.7	1.20 H	275	49.9	2.4
3	*5210.00	104.3 PK			1.20 H	275	102.3	2.0
4	*5210.00	93.3 AV			1.20 H	275	91.3	2.0
5	5368.00	53.4 PK	74.0	-20.6	1.20 H	275	51.5	1.9
6	5368.00	40.0 AV	54.0	-14.0	1.20 H	275	38.1	1.9
7	#10420.00	50.6 PK	68.2	-17.6	1.58 H	284	38.6	12.0
8	15630.00	47.3 PK	74.0	-26.7	1.52 H	320	35.6	11.7
9	15630.00	36.8 AV	54.0	-17.2	1.52 H	320	25.1	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

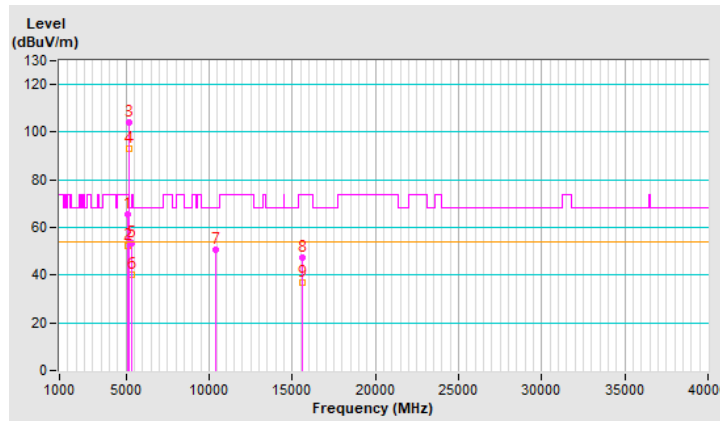




RF Mode	TX 802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5131.00	58.8 PK	74.0	-15.2	3.05 V	129	56.4	2.4
2	5131.00	45.3 AV	54.0	-8.7	3.05 V	129	42.9	2.4
3	*5210.00	100.4 PK			3.05 V	129	98.4	2.0
4	*5210.00	89.8 AV			3.05 V	129	87.8	2.0
5	5350.00	52.8 PK	74.0	-21.2	3.05 V	129	50.8	2.0
6	5350.00	38.6 AV	54.0	-15.4	3.05 V	129	36.6	2.0
7	#10420.00	49.4 PK	68.2	-18.8	1.51 V	292	37.4	12.0
8	15630.00	50.4 PK	74.0	-23.6	2.32 V	265	38.7	11.7
9	15630.00	40.6 AV	54.0	-13.4	2.32 V	265	28.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

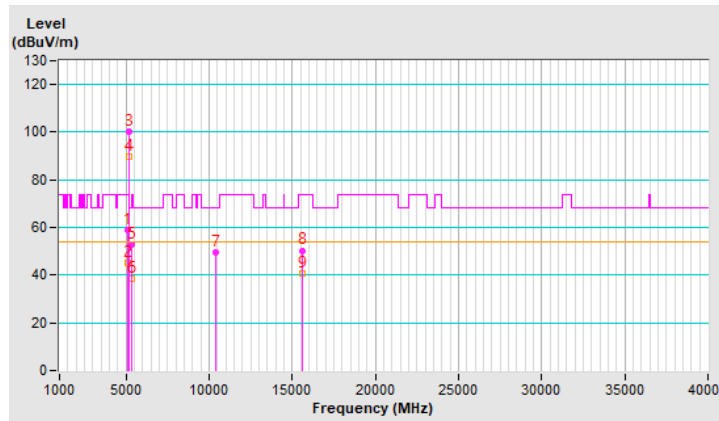


RF Mode	TX 802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.4 PK	74.0	-21.6	1.01 H	259	50.0	2.4
2	5150.00	40.2 AV	54.0	-13.8	1.01 H	259	37.8	2.4
3	*5290.00	104.8 PK			1.01 H	259	103.1	1.7
4	*5290.00	93.7 AV			1.01 H	259	92.0	1.7
5	5355.62	69.1 PK	74.0	-4.9	1.01 H	259	67.2	1.9
6	5355.62	52.3 AV	54.0	-1.7	1.01 H	259	50.4	1.9
7	#10580.00	51.0 PK	68.2	-17.2	1.60 H	265	39.3	11.7
8	15870.00	47.2 PK	74.0	-26.8	1.56 H	314	36.1	11.1
9	15870.00	36.6 AV	54.0	-17.4	1.56 H	314	25.5	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

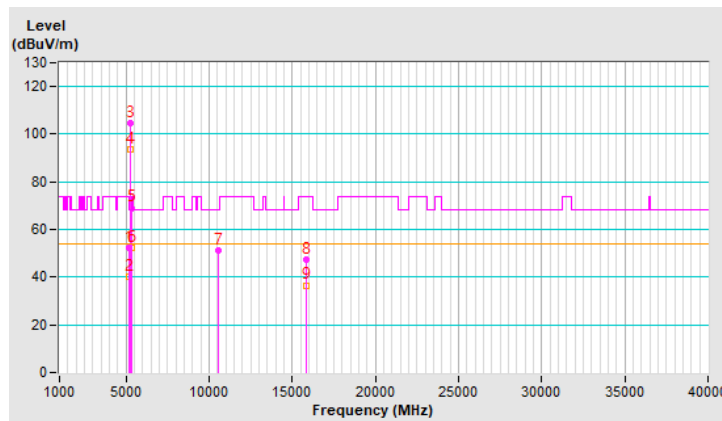


RF Mode	TX 802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.9 PK	74.0	-21.1	3.13 V	128	50.5	2.4
2	5150.00	39.4 AV	54.0	-14.6	3.13 V	128	37.0	2.4
3	*5290.00	101.5 PK			3.13 V	128	99.8	1.7
4	*5290.00	90.3 AV			3.13 V	128	88.6	1.7
5	5375.20	59.1 PK	74.0	-14.9	3.13 V	128	57.2	1.9
6	5375.20	43.2 AV	54.0	-10.8	3.13 V	128	41.3	1.9
7	#10580.00	48.5 PK	68.2	-19.7	1.58 V	282	36.8	11.7
8	15870.00	49.6 PK	74.0	-24.4	2.37 V	250	38.5	11.1
9	15870.00	40.3 AV	54.0	-13.7	2.37 V	250	29.2	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

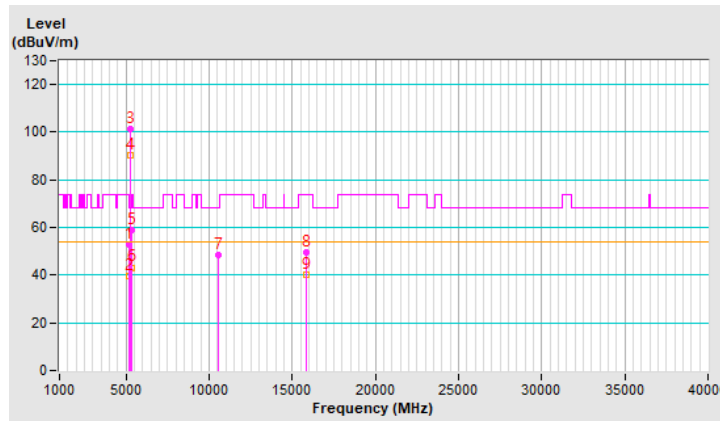


RF Mode	TX 802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.8 PK	74.0	-9.2	1.16 H	294	62.6	2.2
2	5460.00	51.3 AV	54.0	-2.7	1.16 H	294	49.1	2.2
3	#5470.00	66.4 PK	68.2	-1.8	1.16 H	294	64.2	2.2
4	*5530.00	102.5 PK			1.16 H	294	100.4	2.1
5	*5530.00	91.6 AV			1.16 H	294	89.5	2.1
6	#5747.20	51.2 PK	68.2	-17.0	1.00 H	0	48.7	2.5
7	11060.00	52.9 PK	74.0	-21.1	1.71 H	299	40.9	12.0
8	11060.00	41.0 AV	54.0	-13.0	1.71 H	299	29.0	12.0
9	#16590.00	47.5 PK	68.2	-20.7	1.46 H	312	33.2	14.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

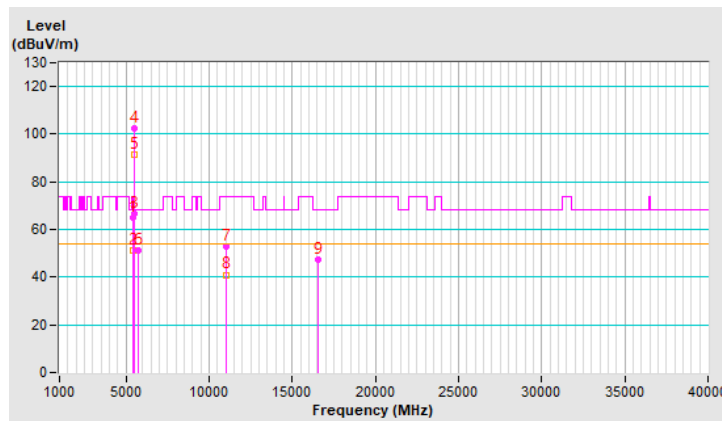


RF Mode	TX 802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.6 PK	74.0	-14.4	2.26 V	127	57.4	2.2
2	5460.00	47.1 AV	54.0	-6.9	2.26 V	127	44.9	2.2
3	#5470.00	60.1 PK	68.2	-8.1	2.26 V	127	57.9	2.2
4	*5530.00	99.4 PK			2.26 V	127	97.3	2.1
5	*5530.00	88.4 AV			2.26 V	127	86.3	2.1
6	#5840.52	51.9 PK	68.2	-16.3	2.26 V	127	49.1	2.8
7	11060.00	47.5 PK	74.0	-26.5	1.61 V	255	35.5	12.0
8	11060.00	36.7 AV	54.0	-17.3	1.61 V	255	24.7	12.0
9	#16590.00	49.3 PK	68.2	-18.9	2.26 V	261	35.0	14.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

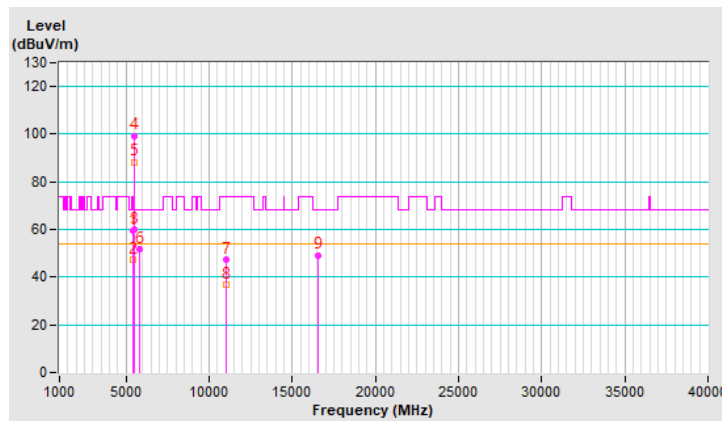


RF Mode	TX 802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	106.0 PK			1.11 H	289	103.8	2.2
2	*5610.00	94.5 AV			1.11 H	289	92.3	2.2
3	#5725.00	66.7 PK	68.2	-1.5	1.11 H	289	64.2	2.5
4	11220.00	53.4 PK	74.0	-20.6	1.67 H	303	41.3	12.1
5	11220.00	41.4 AV	54.0	-12.6	1.67 H	303	29.3	12.1
6	#16830.00	48.1 PK	68.2	-20.1	1.49 H	320	32.4	15.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

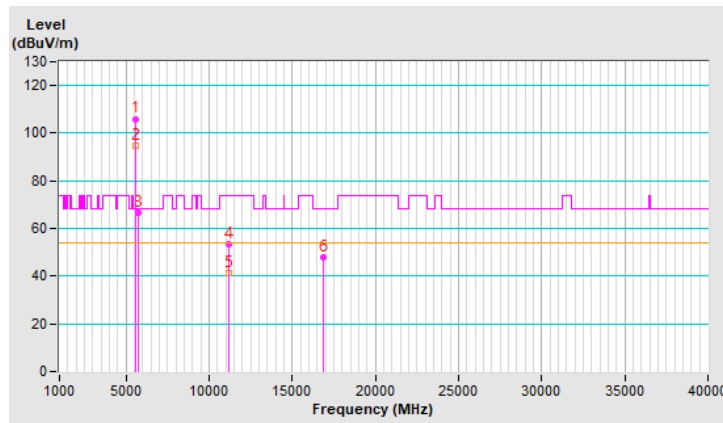


RF Mode	TX 802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	101.5 PK			2.22 V	118	99.3	2.2
2	*5610.00	90.4 AV			2.22 V	118	88.2	2.2
3	#5725.00	59.9 PK	68.2	-8.3	2.22 V	118	57.4	2.5
4	11220.00	48.4 PK	74.0	-25.6	1.63 V	254	36.3	12.1
5	11220.00	37.3 AV	54.0	-16.7	1.63 V	254	25.2	12.1
6	#16830.00	49.9 PK	68.2	-18.3	2.32 V	253	34.2	15.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

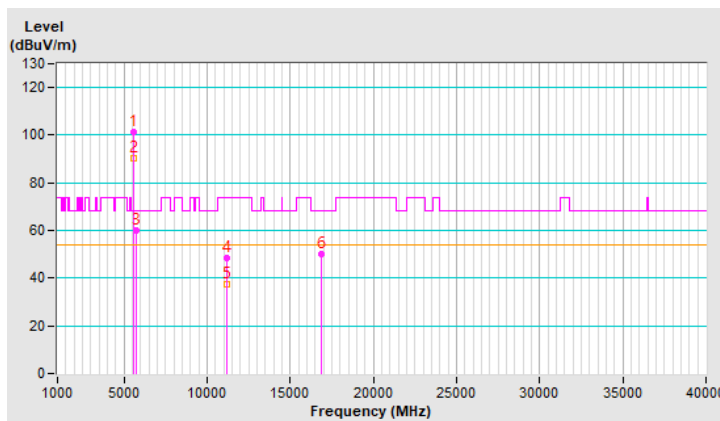


RF Mode	TX 802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.0 PK	74.0	-14.0	1.00 H	305	57.8	2.2
2	5460.00	40.1 AV	54.0	-13.9	1.00 H	305	37.9	2.2
3	#5470.00	60.2 PK	68.2	-8.0	1.00 H	305	58.0	2.2
4	*5690.00	109.0 PK			1.00 H	305	106.7	2.3
5	*5690.00	97.0 AV			1.00 H	305	94.7	2.3
6	#5850.00	66.6 PK	68.2	-1.6	1.00 H	305	63.7	2.9
7	11380.00	53.5 PK	74.0	-20.5	1.71 H	302	41.3	12.2
8	11380.00	41.3 AV	54.0	-12.7	1.71 H	302	29.1	12.2
9	#17070.00	46.8 PK	68.2	-21.4	1.50 H	328	30.2	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

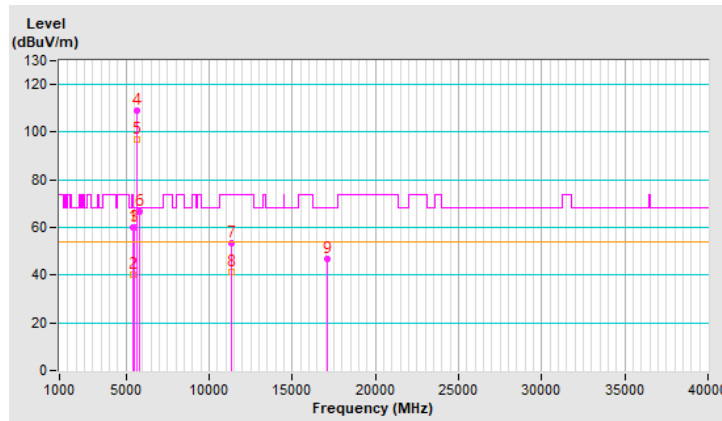


RF Mode	TX 802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.7 PK	74.0	-22.3	2.22 V	121	49.5	2.2
2	5460.00	38.5 AV	54.0	-15.5	2.22 V	121	36.3	2.2
3	#5470.00	55.2 PK	68.2	-13.0	2.22 V	121	53.0	2.2
4	*5690.00	105.6 PK			2.22 V	121	103.3	2.3
5	*5690.00	94.8 AV			2.22 V	121	92.5	2.3
6	#5850.00	60.2 PK	68.2	-8.0	2.22 V	121	57.3	2.9
7	11380.00	48.0 PK	74.0	-26.0	1.61 V	270	35.8	12.2
8	11380.00	37.0 AV	54.0	-17.0	1.61 V	270	24.8	12.2
9	#17070.00	49.8 PK	68.2	-18.4	2.29 V	266	33.2	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

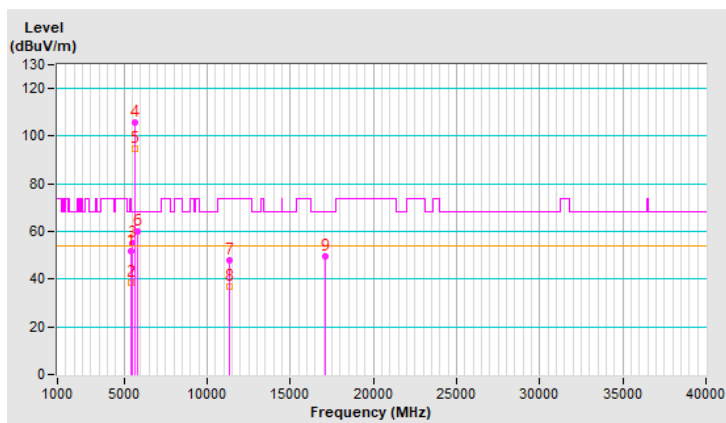


RF Mode	TX 802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.11	66.2 PK	68.2	-2.0	1.04 H	291	63.9	2.3
2	*5775.00	106.4 PK			1.04 H	291	103.8	2.6
3	*5775.00	95.1 AV			1.04 H	291	92.5	2.6
4	#5922.51	65.2 PK	68.2	-3.0	1.04 H	291	62.3	2.9
5	11550.00	47.7 PK	74.0	-26.3	1.54 H	281	35.4	12.3
6	11550.00	36.8 AV	54.0	-17.2	1.54 H	281	24.5	12.3
7	#17325.00	50.8 PK	68.2	-17.4	2.95 H	72	33.6	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

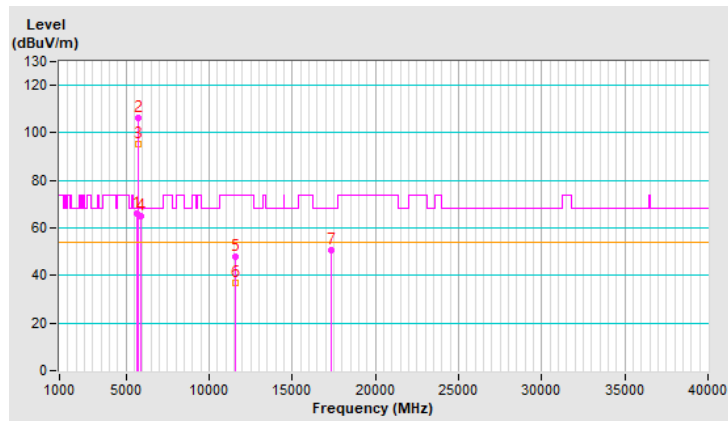




RF Mode	TX 802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.77	62.2 PK	68.2	-6.0	3.03 V	146	59.9	2.3
2	*5775.00	99.5 PK			3.03 V	146	96.9	2.6
3	*5775.00	88.4 AV			3.03 V	146	85.8	2.6
4	#5925.12	57.7 PK	68.2	-10.5	3.03 V	146	54.8	2.9
5	11550.00	51.4 PK	74.0	-22.6	1.23 V	290	39.1	12.3
6	11550.00	40.3 AV	54.0	-13.7	1.23 V	290	28.0	12.3
7	#17325.00	49.6 PK	68.2	-18.6	3.42 V	190	32.4	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

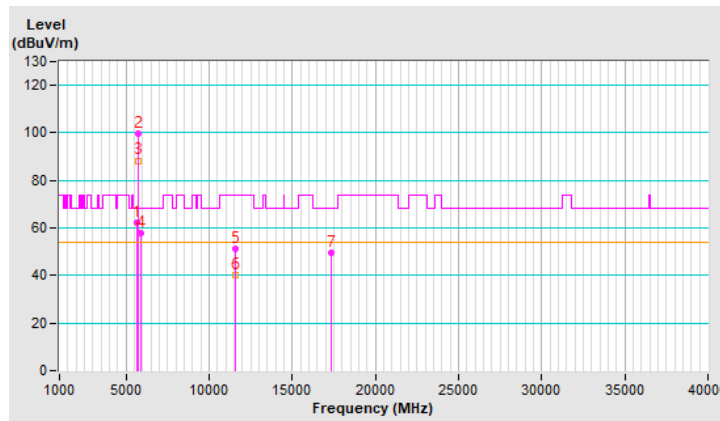


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5132.00	54.2 PK	74.0	-19.8	1.37 H	168	51.8	2.4
2	5132.00	45.6 AV	54.0	-8.4	1.37 H	168	43.2	2.4
3	5142.80	64.8 PK	74.0	-9.2	1.37 H	168	62.4	2.4
4	5142.80	41.7 AV	54.0	-12.3	1.37 H	168	39.3	2.4
5	*5180.00	120.2 PK			1.37 H	168	118.0	2.2
6	*5180.00	109.7 AV			1.37 H	168	107.5	2.2
7	#10360.00	54.5 PK	68.2	-13.7	1.64 H	251	42.8	11.7
8	15540.00	53.2 PK	74.0	-20.8	1.39 H	293	41.4	11.8
9	15540.00	40.5 AV	54.0	-13.5	1.39 H	293	28.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

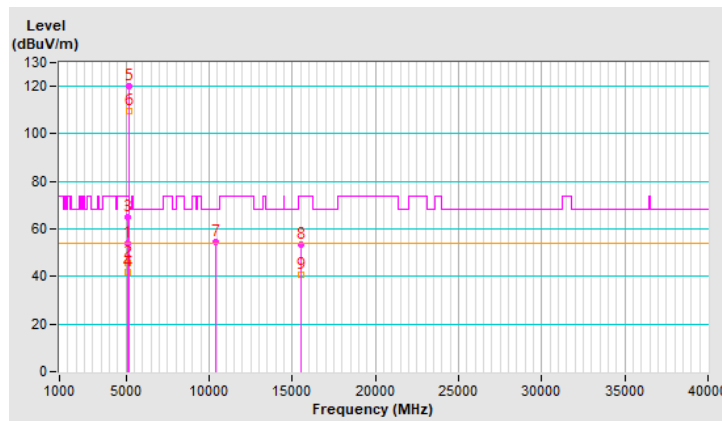


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5131.66	50.4 PK	74.0	-23.6	1.51 V	258	48.0	2.4
2	5131.66	40.1 AV	54.0	-13.9	1.51 V	258	37.7	2.4
3	*5180.00	112.1 PK			1.51 V	258	109.9	2.2
4	*5180.00	102.2 AV			1.51 V	258	100.0	2.2
5	#10360.00	47.8 PK	68.2	-20.4	1.72 V	290	36.1	11.7
6	15540.00	55.2 PK	74.0	-18.8	2.32 V	265	43.4	11.8
7	15540.00	42.7 AV	54.0	-11.3	2.32 V	265	30.9	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

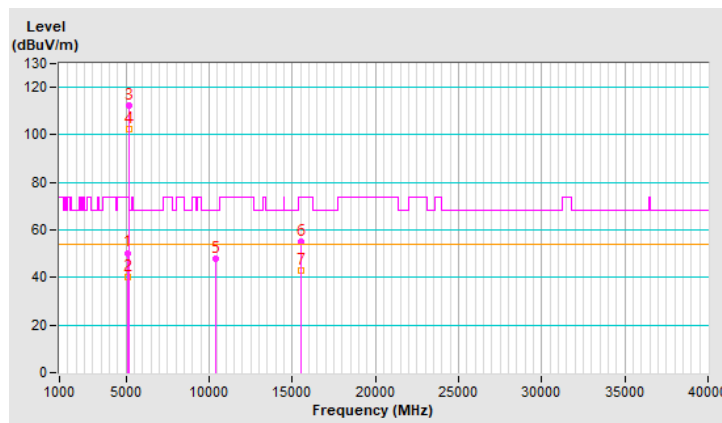


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	120.0 PK			1.32 H	165	117.9	2.1
2	*5200.00	109.4 AV			1.32 H	165	107.3	2.1
3	#10400.00	54.8 PK	68.2	-13.4	1.66 H	259	42.9	11.9
4	15600.00	53.5 PK	74.0	-20.5	1.38 H	286	42.0	11.5
5	15600.00	41.0 AV	54.0	-13.0	1.38 H	286	29.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

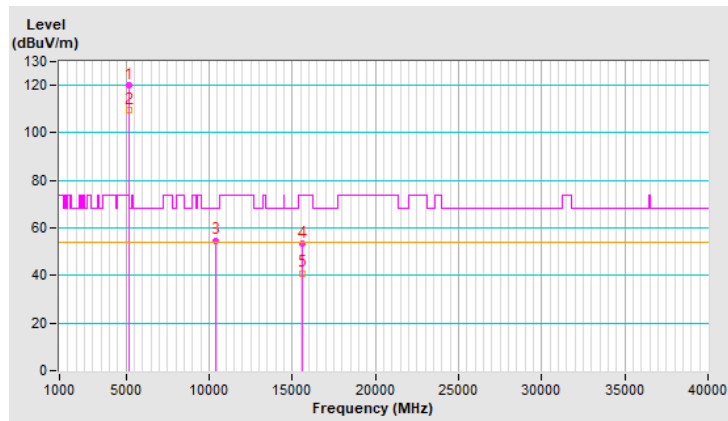




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	111.7 PK			1.52 V	274	109.6	2.1
2	*5200.00	102.0 AV			1.52 V	274	99.9	2.1
3	#10400.00	48.3 PK	68.2	-19.9	1.67 V	303	36.4	11.9
4	15600.00	54.6 PK	74.0	-19.4	2.35 V	258	43.1	11.5
5	15600.00	42.3 AV	54.0	-11.7	2.35 V	258	30.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

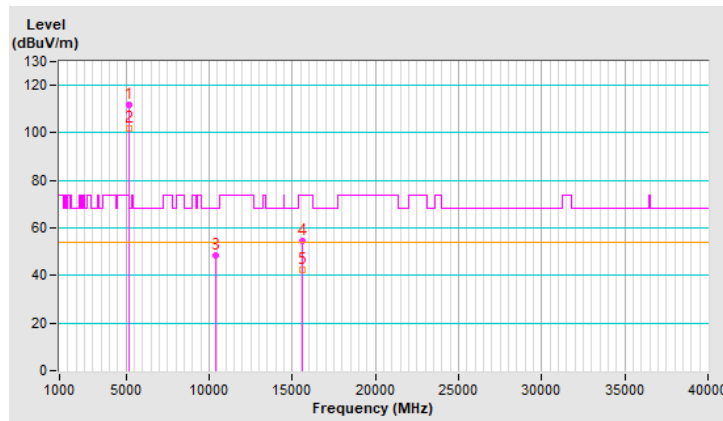


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	120.6 PK			1.33 H	155	118.7	1.9
2	*5240.00	109.8 AV			1.33 H	155	107.9	1.9
3	#10480.00	54.0 PK	68.2	-14.2	1.69 H	258	42.1	11.9
4	15720.00	53.3 PK	74.0	-20.7	1.37 H	286	41.6	11.7
5	15720.00	40.6 AV	54.0	-13.4	1.37 H	286	28.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

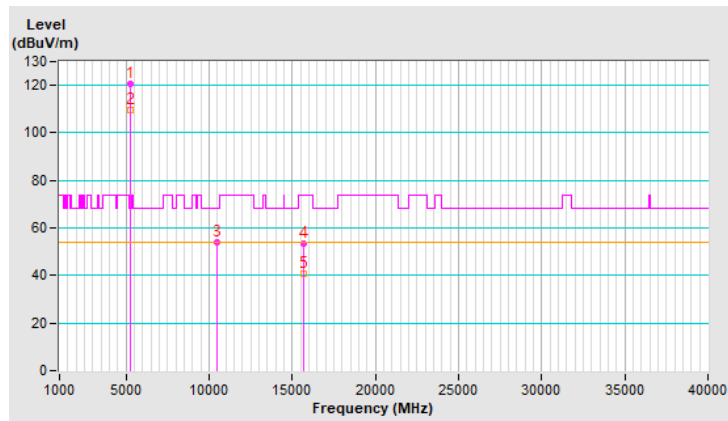




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	112.3 PK			1.47 V	245	110.4	1.9
2	*5240.00	102.2 AV			1.47 V	245	100.3	1.9
3	#10480.00	47.8 PK	68.2	-20.4	1.67 V	282	35.9	11.9
4	15720.00	55.4 PK	74.0	-18.6	2.34 V	258	43.7	11.7
5	15720.00	43.1 AV	54.0	-10.9	2.34 V	258	31.4	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

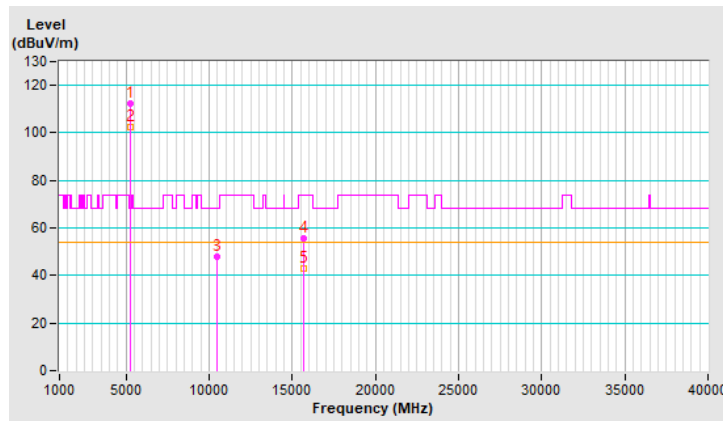


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5260.00	120.0 PK			1.38 H	160	118.2	1.8
2	*5260.00	109.8 AV			1.38 H	160	108.0	1.8
3	#10520.00	54.4 PK	68.2	-13.8	1.66 H	254	42.4	12.0
4	15780.00	53.3 PK	74.0	-20.7	1.45 H	288	41.8	11.5
5	15780.00	40.4 AV	54.0	-13.6	1.45 H	288	28.9	11.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

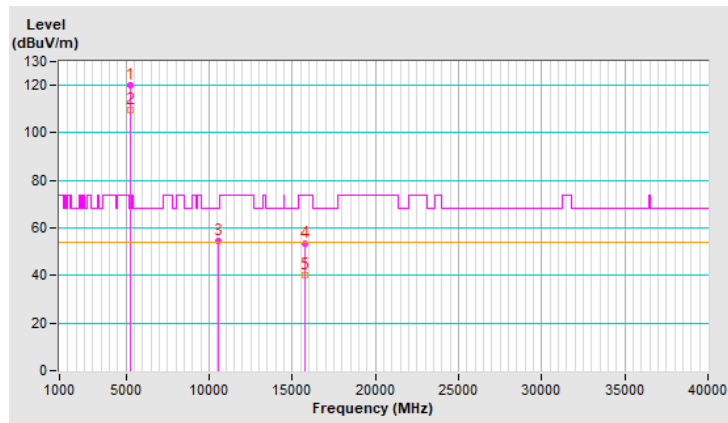




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5260.00	112.5 PK			1.54 V	259	110.7	1.8
2	*5260.00	102.7 AV			1.54 V	259	100.9	1.8
3	#10520.00	48.3 PK	68.2	-19.9	1.74 V	289	36.3	12.0
4	15780.00	55.4 PK	74.0	-18.6	2.33 V	253	43.9	11.5
5	15780.00	43.0 AV	54.0	-11.0	2.33 V	253	31.5	11.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

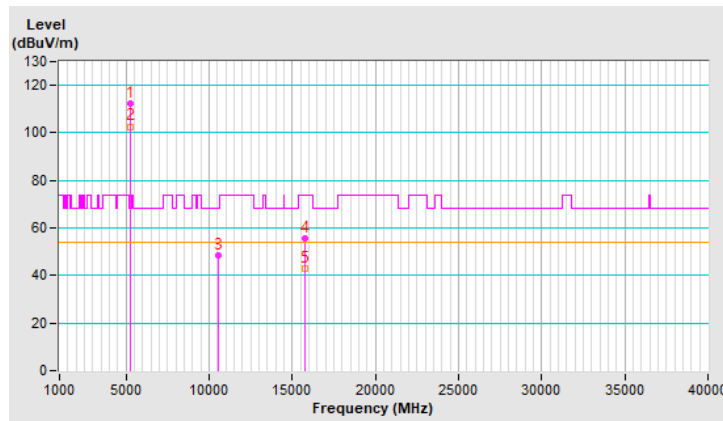


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	119.9 PK			1.38 H	154	118.2	1.7
2	*5300.00	109.5 AV			1.38 H	154	107.8	1.7
3	10600.00	54.4 PK	74.0	-19.6	1.68 H	262	42.7	11.7
4	10600.00	40.9 AV	54.0	-13.1	1.68 H	262	29.2	11.7
5	15900.00	53.0 PK	74.0	-21.0	1.37 H	285	41.9	11.1
6	15900.00	40.5 AV	54.0	-13.5	1.37 H	285	29.4	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

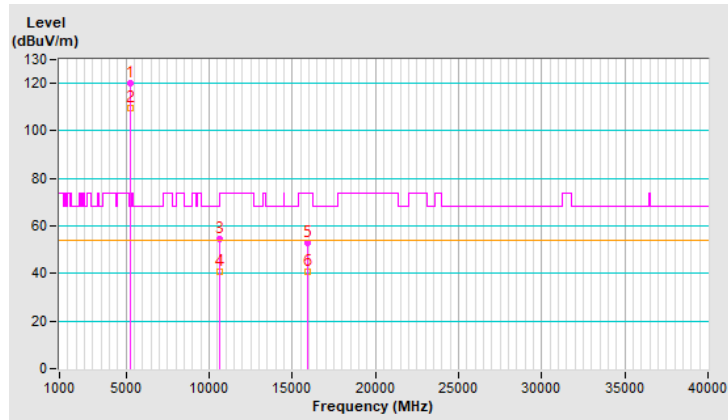


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	112.7 PK			1.48 V	262	111.0	1.7
2	*5300.00	102.6 AV			1.48 V	262	100.9	1.7
3	10600.00	47.5 PK	74.0	-26.5	1.70 V	305	35.8	11.7
4	10600.00	36.8 AV	54.0	-17.2	1.70 V	305	25.1	11.7
5	15900.00	55.4 PK	74.0	-18.6	2.26 V	263	44.3	11.1
6	15900.00	42.8 AV	54.0	-11.2	2.26 V	263	31.7	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

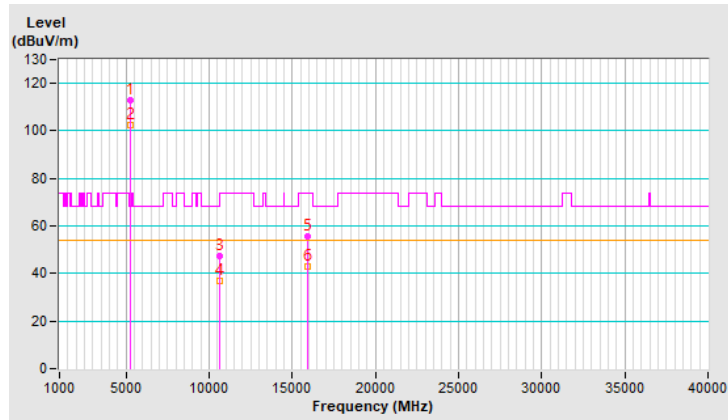


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	121.2 PK			1.42 H	171	119.5	1.7
2	*5320.00	111.2 AV			1.42 H	171	109.5	1.7
3	5353.80	54.4 PK	74.0	-19.6	1.42 H	171	52.5	1.9
4	5353.80	42.5 AV	54.0	-11.5	1.42 H	171	40.6	1.9
5	5363.20	65.2 PK	74.0	-8.8	1.42 H	171	63.3	1.9
6	5363.20	39.8 AV	54.0	-14.2	1.42 H	171	37.9	1.9
7	10640.00	54.7 PK	74.0	-19.3	1.61 H	245	43.1	11.6
8	10640.00	41.4 AV	54.0	-12.6	1.61 H	245	29.8	11.6
9	15960.00	53.0 PK	74.0	-21.0	1.41 H	304	41.6	11.4
10	15960.00	40.0 AV	54.0	-14.0	1.41 H	304	28.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

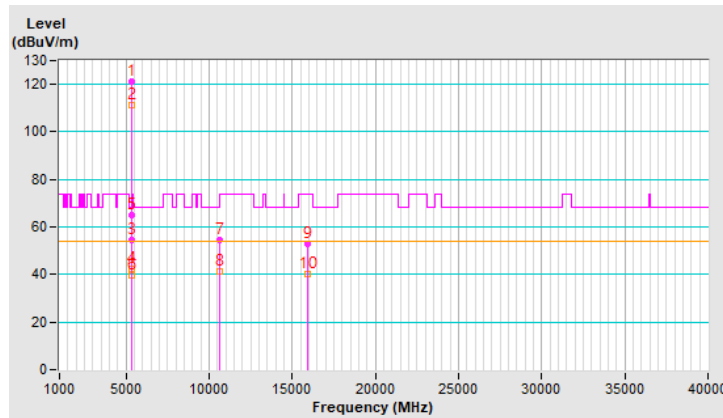


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.8 PK			1.53 V	253	111.1	1.7
2	*5320.00	102.9 AV			1.53 V	253	101.2	1.7
3	5350.00	56.6 PK	74.0	-17.4	1.53 V	253	54.6	2.0
4	5350.00	38.5 AV	54.0	-15.5	1.53 V	253	36.5	2.0
5	10640.00	48.6 PK	74.0	-25.4	1.70 V	287	37.0	11.6
6	10640.00	37.5 AV	54.0	-16.5	1.70 V	287	25.9	11.6
7	15960.00	55.4 PK	74.0	-18.6	2.27 V	274	44.0	11.4
8	15960.00	42.9 AV	54.0	-11.1	2.27 V	274	31.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

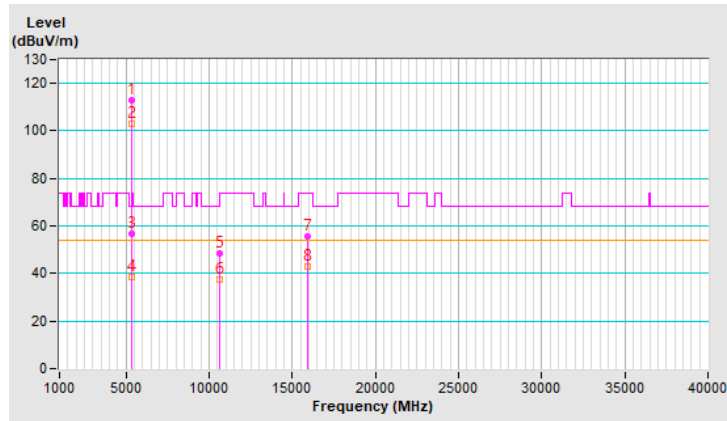


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5452.00	52.8 PK	74.0	-21.2	1.50 H	178	50.6	2.2
2	5452.00	43.3 AV	54.0	-10.7	1.50 H	178	41.1	2.2
3	5460.00	66.1 PK	74.0	-7.9	1.50 H	178	63.9	2.2
4	5460.00	41.0 AV	54.0	-13.0	1.50 H	178	38.8	2.2
5	#5464.30	59.7 PK	68.2	-8.5	1.50 H	178	57.5	2.2
6	*5500.00	118.5 PK			1.50 H	178	116.4	2.1
7	*5500.00	108.5 AV			1.50 H	178	106.4	2.1
8	11000.00	54.0 PK	74.0	-20.0	1.60 H	241	41.9	12.1
9	11000.00	40.9 AV	54.0	-13.1	1.60 H	241	28.8	12.1
10	#16500.00	53.9 PK	68.2	-14.3	1.41 H	307	40.5	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

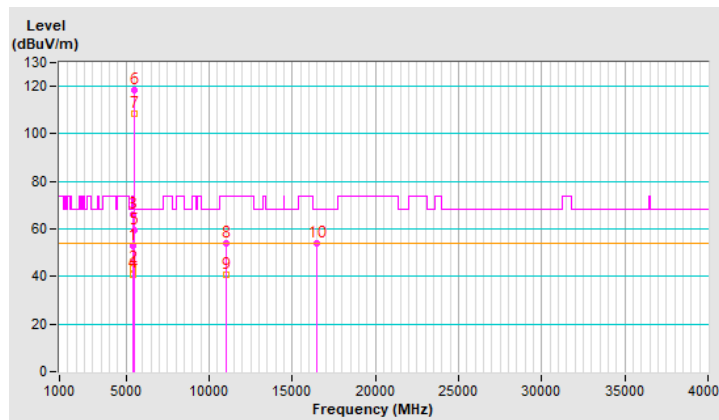


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5457.62	54.3 PK	74.0	-19.7	1.11 V	150	52.1	2.2
2	5457.62	39.1 AV	54.0	-14.9	1.11 V	150	36.9	2.2
3	#5469.43	57.1 PK	68.2	-11.1	1.11 V	150	54.9	2.2
4	*5500.00	112.3 PK			1.11 V	150	110.2	2.1
5	*5500.00	102.5 AV			1.11 V	150	100.4	2.1
6	11000.00	47.8 PK	74.0	-26.2	1.68 V	280	35.7	12.1
7	11000.00	37.2 AV	54.0	-16.8	1.68 V	280	25.1	12.1
8	#16500.00	55.1 PK	68.2	-13.1	2.33 V	251	41.7	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

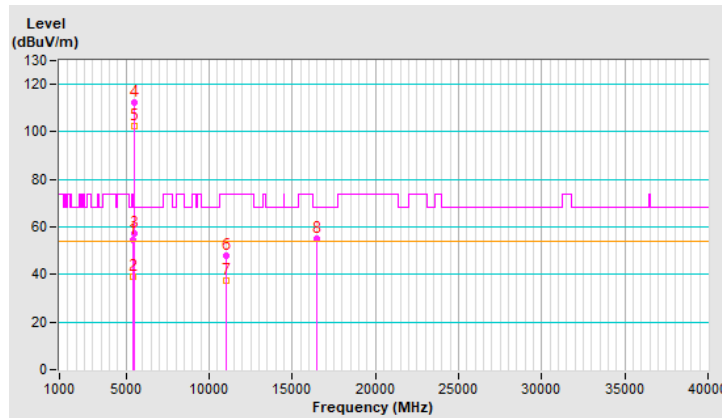




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5580.00	118.5 PK			1.52 H	171	116.3	2.2
2	*5580.00	108.6 AV			1.52 H	171	106.4	2.2
3	11160.00	55.0 PK	74.0	-19.0	1.58 H	235	43.1	11.9
4	11160.00	41.7 AV	54.0	-12.3	1.58 H	235	29.8	11.9
5	#16740.00	53.3 PK	68.2	-14.9	1.38 H	291	38.1	15.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

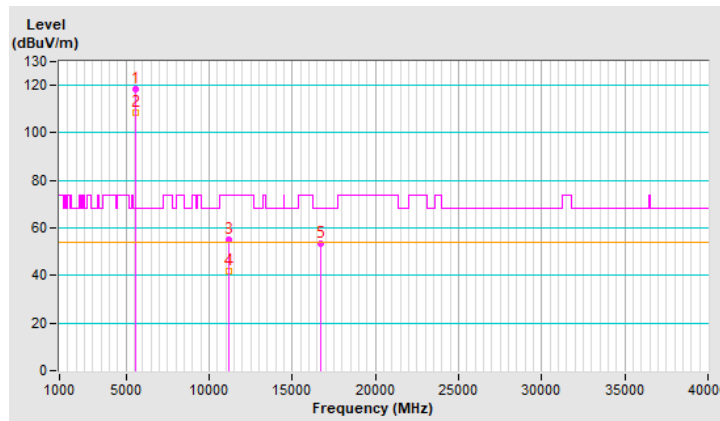


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	112.5 PK			1.55 V	250	110.3	2.2
2	*5580.00	102.6 AV			1.55 V	250	100.4	2.2
3	11160.00	47.5 PK	74.0	-26.5	1.75 V	280	35.6	11.9
4	11160.00	37.0 AV	54.0	-17.0	1.75 V	280	25.1	11.9
5	#16740.00	55.3 PK	68.2	-12.9	2.30 V	269	40.1	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

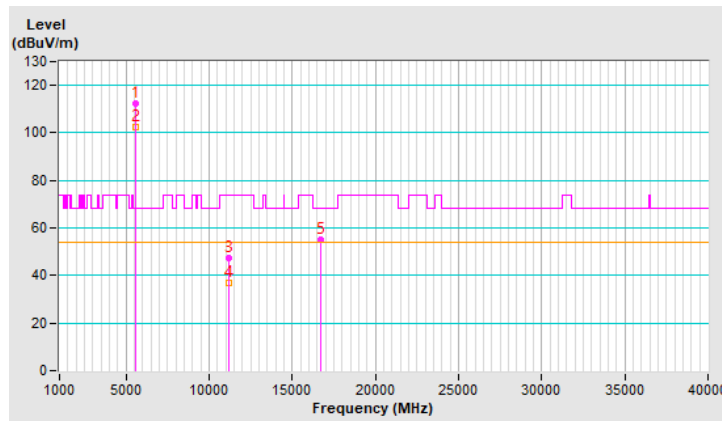


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	117.7 PK			1.50 H	173	115.4	2.3
2	*5700.00	107.0 AV			1.50 H	173	104.7	2.3
3	#5725.00	66.2 PK	68.2	-2.0	1.50 H	173	63.7	2.5
4	11400.00	54.8 PK	74.0	-19.2	1.63 H	247	42.6	12.2
5	11400.00	41.4 AV	54.0	-12.6	1.63 H	247	29.2	12.2
6	#17100.00	53.3 PK	68.2	-14.9	1.40 H	292	36.7	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

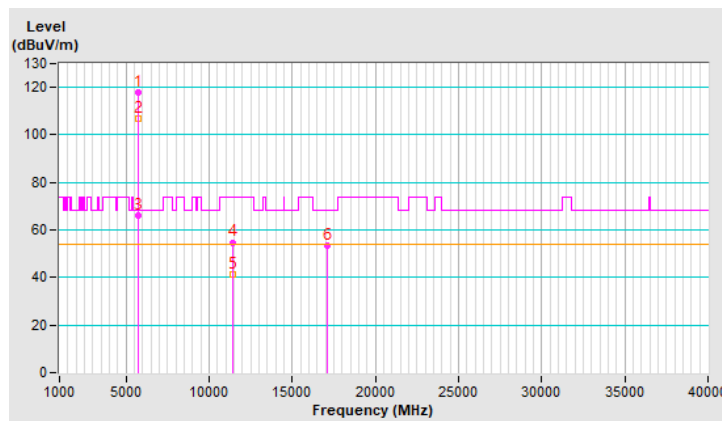


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.9 PK			1.17 V	217	110.6	2.3
2	*5700.00	102.8 AV			1.17 V	217	100.5	2.3
3	#5725.00	61.3 PK	68.2	-6.9	1.17 V	217	58.8	2.5
4	11400.00	48.1 PK	74.0	-25.9	1.68 V	304	35.9	12.2
5	11400.00	37.1 AV	54.0	-16.9	1.68 V	304	24.9	12.2
6	#17100.00	55.3 PK	68.2	-12.9	2.29 V	278	38.7	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

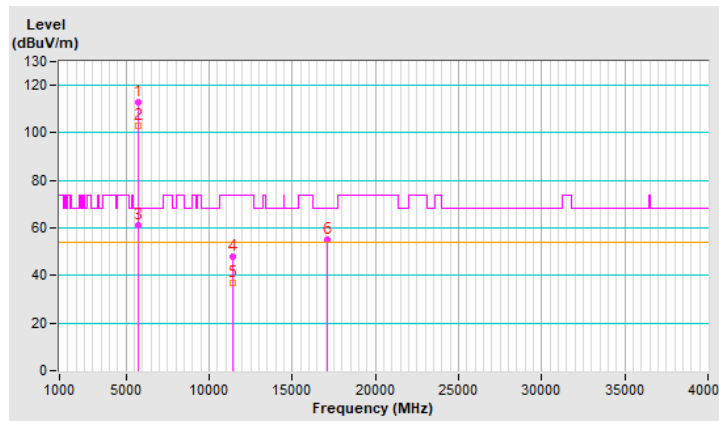


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.3 PK	74.0	-21.7	1.53 H	169	50.1	2.2
2	5460.00	41.8 AV	54.0	-12.2	1.53 H	169	39.6	2.2
3	#5470.00	54.2 PK	68.2	-14.0	1.53 H	169	52.0	2.2
4	*5720.00	117.7 PK			1.53 H	169	115.3	2.4
5	*5720.00	107.2 AV			1.53 H	169	104.8	2.4
6	#5850.00	55.1 PK	68.2	-13.1	1.53 H	169	52.2	2.9
7	11440.00	54.8 PK	74.0	-19.2	1.61 H	262	42.6	12.2
8	11440.00	41.7 AV	54.0	-12.3	1.61 H	262	29.5	12.2
9	#17160.00	53.7 PK	68.2	-14.5	1.37 H	291	37.2	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

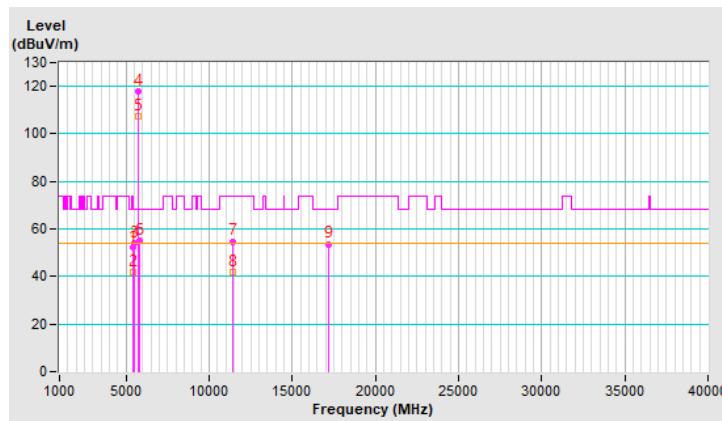


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.3 PK	74.0	-21.7	1.12 V	235	50.1	2.2
2	5460.00	41.6 AV	54.0	-12.4	1.12 V	235	39.4	2.2
3	#5470.00	54.5 PK	68.2	-13.7	1.12 V	235	52.3	2.2
4	*5720.00	112.8 PK			1.12 V	235	110.4	2.4
5	*5720.00	103.0 AV			1.12 V	235	100.6	2.4
6	#5850.00	55.0 PK	68.2	-13.2	1.12 V	235	52.1	2.9
7	11440.00	47.8 PK	74.0	-26.2	1.74 V	280	35.6	12.2
8	11440.00	36.9 AV	54.0	-17.1	1.74 V	280	24.7	12.2
9	#17160.00	54.9 PK	68.2	-13.3	2.36 V	258	38.4	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

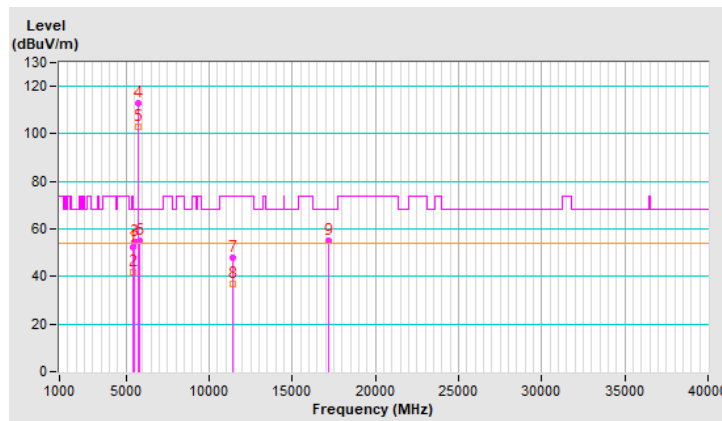


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5624.21	50.4 PK	68.2	-17.8	1.14 H	276	48.2	2.2
2	*5745.00	120.1 PK			1.14 H	276	117.6	2.5
3	*5745.00	110.1 AV			1.14 H	276	107.6	2.5
4	#5935.32	50.7 PK	68.2	-17.5	1.14 H	276	47.8	2.9
5	11490.00	54.7 PK	74.0	-19.3	1.67 H	245	42.3	12.4
6	11490.00	41.5 AV	54.0	-12.5	1.67 H	245	29.1	12.4
7	#17235.00	52.8 PK	68.2	-15.4	1.44 H	293	36.1	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

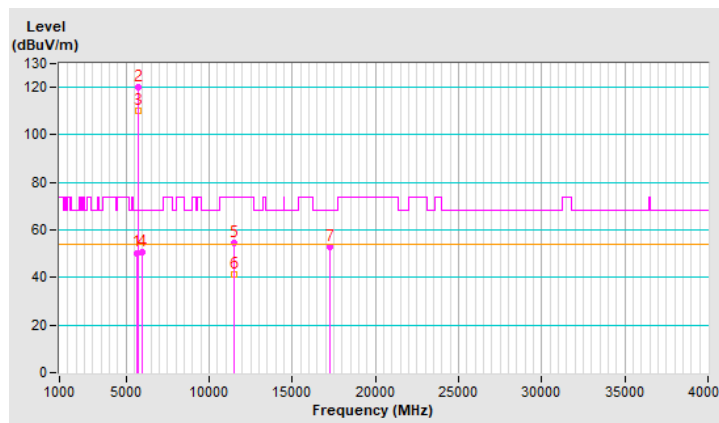


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5579.41	50.1 PK	68.2	-18.1	1.11 V	219	47.9	2.2
2	*5745.00	112.8 PK			1.11 V	219	110.3	2.5
3	*5745.00	102.7 AV			1.11 V	219	100.2	2.5
4	#5929.04	50.7 PK	68.2	-17.5	1.11 V	219	47.8	2.9
5	11490.00	47.8 PK	74.0	-26.2	1.67 V	296	35.4	12.4
6	11490.00	37.2 AV	54.0	-16.8	1.67 V	296	24.8	12.4
7	#17235.00	55.7 PK	68.2	-12.5	2.35 V	273	39.0	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

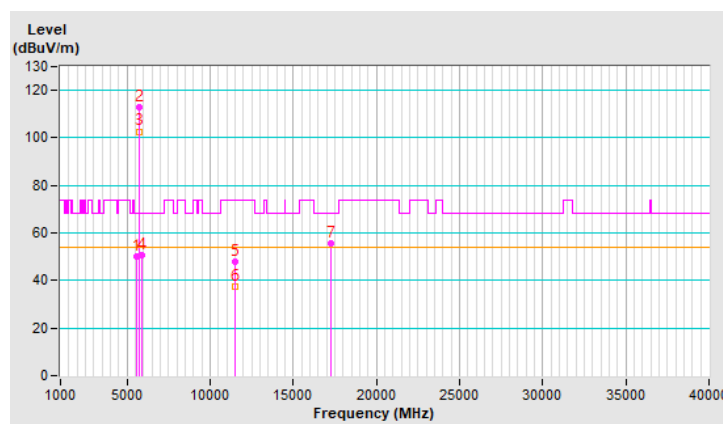




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5642.47	50.9 PK	68.2	-17.3	1.85 H	291	48.6	2.3
2	*5785.00	119.7 PK			1.85 H	291	117.0	2.7
3	*5785.00	109.8 AV			1.85 H	291	107.1	2.7
4	#5965.93	51.6 PK	68.2	-16.6	1.85 H	291	48.7	2.9
5	11570.00	54.1 PK	74.0	-19.9	1.69 H	257	41.7	12.4
6	11570.00	41.1 AV	54.0	-12.9	1.69 H	257	28.7	12.4
7	#17355.00	53.3 PK	68.2	-14.9	1.40 H	278	35.7	17.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

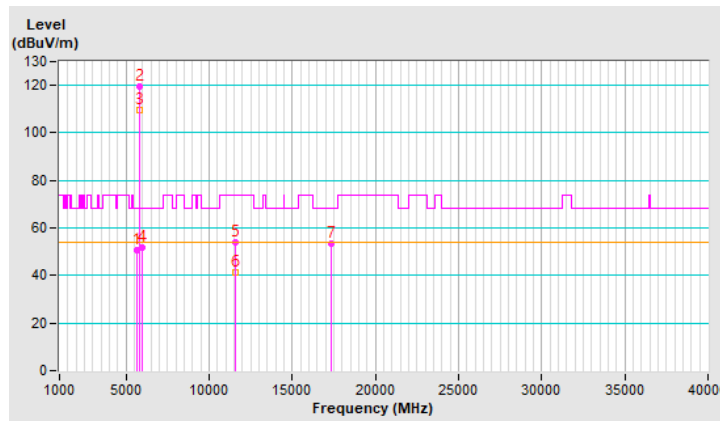


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5590.27	50.4 PK	68.2	-17.8	1.17 V	232	48.2	2.2
2	*5785.00	112.6 PK			1.17 V	232	109.9	2.7
3	*5785.00	102.5 AV			1.17 V	232	99.8	2.7
4	#5928.12	50.6 PK	68.2	-17.6	1.17 V	232	47.7	2.9
5	11570.00	48.2 PK	74.0	-25.8	1.68 V	285	35.8	12.4
6	11570.00	37.3 AV	54.0	-16.7	1.68 V	285	24.9	12.4
7	#17355.00	55.4 PK	68.2	-12.8	2.29 V	275	37.8	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

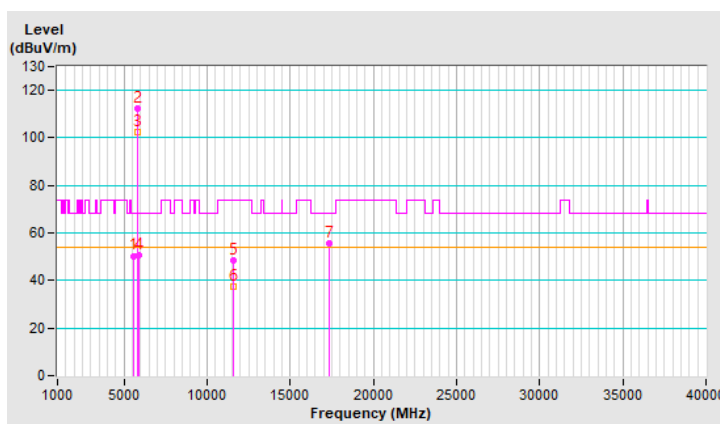




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5563.44	51.3 PK	68.2	-16.9	1.96 H	291	49.1	2.2
2	*5825.00	120.3 PK			1.96 H	291	117.5	2.8
3	*5825.00	110.3 AV			1.96 H	291	107.5	2.8
4	#5947.75	51.1 PK	68.2	-17.1	1.96 H	291	48.2	2.9
5	11650.00	54.6 PK	74.0	-19.4	1.60 H	245	42.7	11.9
6	11650.00	41.4 AV	54.0	-12.6	1.60 H	245	29.5	11.9
7	#17475.00	53.4 PK	68.2	-14.8	1.41 H	282	34.9	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

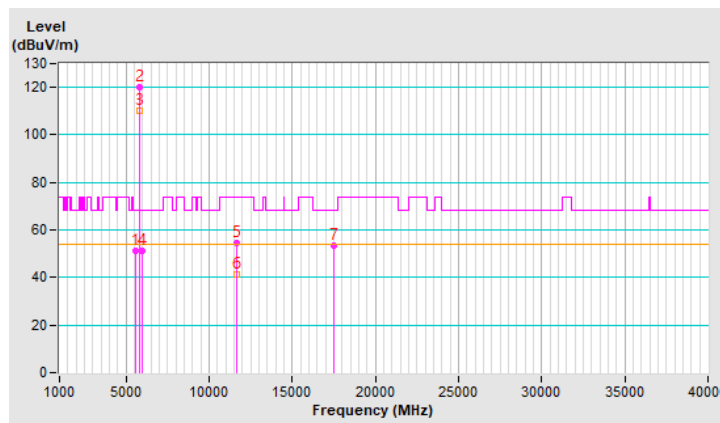


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5606.80	50.5 PK	68.2	-17.7	1.08 V	219	48.3	2.2
2	*5825.00	112.7 PK			1.08 V	219	109.9	2.8
3	*5825.00	102.6 AV			1.08 V	219	99.8	2.8
4	#5936.40	51.0 PK	68.2	-17.2	1.08 V	219	48.1	2.9
5	11650.00	48.4 PK	74.0	-25.6	1.68 V	279	36.5	11.9
6	11650.00	37.3 AV	54.0	-16.7	1.68 V	279	25.4	11.9
7	#17475.00	55.4 PK	68.2	-12.8	2.27 V	250	36.9	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

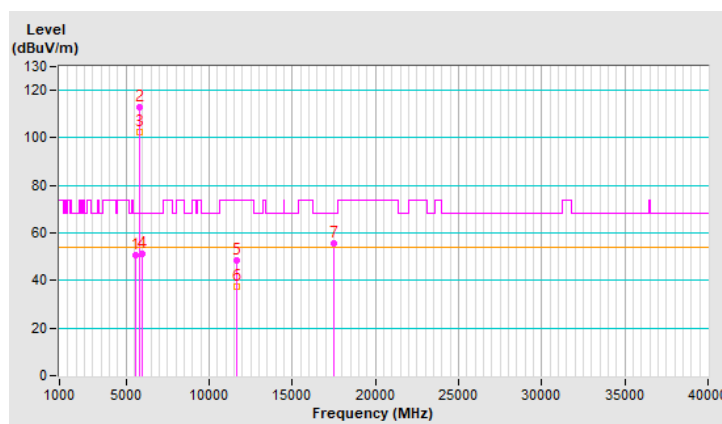


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	5131.50	54.7 PK	74.0	-19.3	1.42 H	177	52.3	2.4
2	5131.50	44.9 AV	54.0	-9.1	1.42 H	177	42.5	2.4
3	5150.00	56.3 PK	74.0	-17.7	1.42 H	177	53.9	2.4
4	5150.00	44.8 AV	54.0	-9.2	1.42 H	177	42.4	2.4
5	*5180.00	118.1 PK			1.42 H	177	115.9	2.2
6	*5180.00	107.4 AV			1.42 H	177	105.2	2.2
7	#10360.00	55.3 PK	68.2	-12.9	1.60 H	249	43.6	11.7
8	15540.00	53.4 PK	74.0	-20.6	1.36 H	296	41.6	11.8
9	15540.00	40.5 AV	54.0	-13.5	1.36 H	296	28.7	11.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

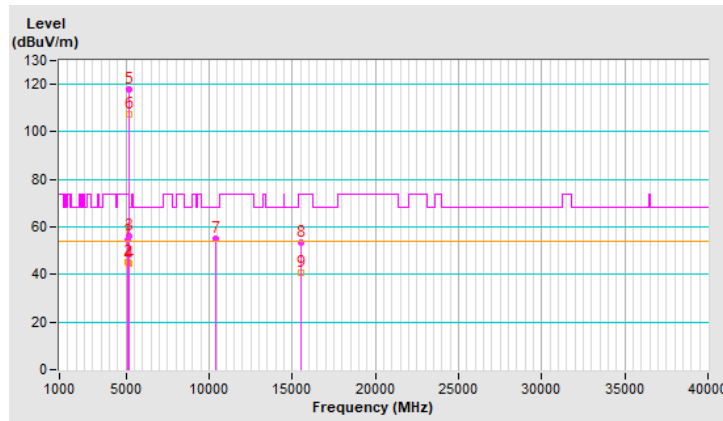


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.7 PK	74.0	-23.3	1.52 V	260	48.3	2.4
2	5150.00	40.0 AV	54.0	-14.0	1.52 V	260	37.6	2.4
3	*5180.00	109.9 PK			1.52 V	260	107.7	2.2
4	*5180.00	99.9 AV			1.52 V	260	97.7	2.2
5	#10360.00	48.1 PK	68.2	-20.1	1.78 V	284	36.4	11.7
6	15540.00	55.4 PK	74.0	-18.6	2.31 V	267	43.6	11.8
7	15540.00	42.9 AV	54.0	-11.1	2.31 V	267	31.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

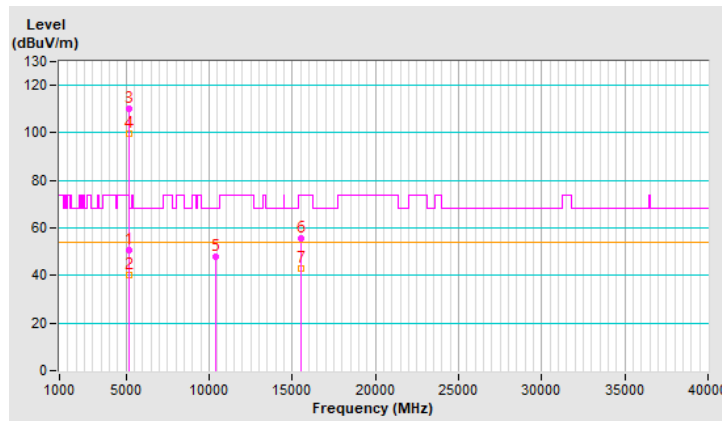


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	117.6 PK			1.43 H	191	115.5	2.1
2	*5200.00	107.0 AV			1.43 H	191	104.9	2.1
3	#10400.00	54.0 PK	68.2	-14.2	1.65 H	241	42.1	11.9
4	15600.00	53.6 PK	74.0	-20.4	1.35 H	308	42.1	11.5
5	15600.00	41.0 AV	54.0	-13.0	1.35 H	308	29.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

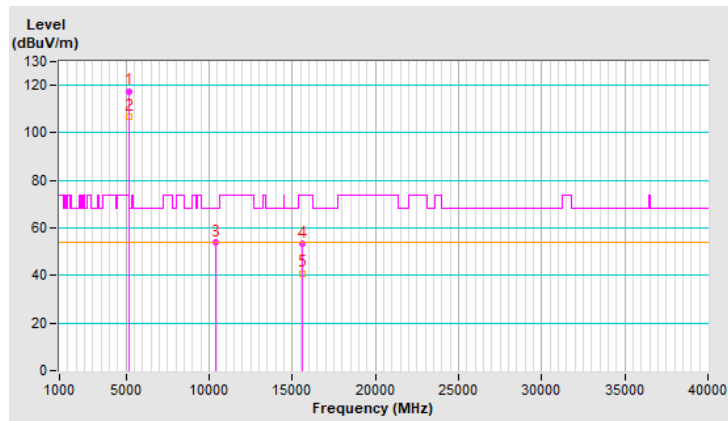




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	110.1 PK			1.46 V	253	108.0	2.1
2	*5200.00	100.1 AV			1.46 V	253	98.0	2.1
3	#10400.00	47.4 PK	68.2	-20.8	1.72 V	299	35.5	11.9
4	15600.00	55.5 PK	74.0	-18.5	2.36 V	279	44.0	11.5
5	15600.00	42.9 AV	54.0	-11.1	2.36 V	279	31.4	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

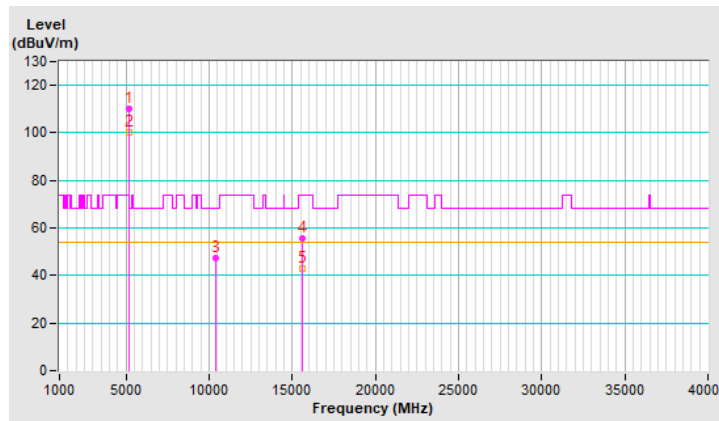




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5240.00	117.8 PK			1.41 H	164	115.9	1.9
2	*5240.00	107.3 AV			1.41 H	164	105.4	1.9
3	#10480.00	54.5 PK	68.2	-13.7	1.63 H	248	42.6	11.9
4	15720.00	53.1 PK	74.0	-20.9	1.34 H	296	41.4	11.7
5	15720.00	40.7 AV	54.0	-13.3	1.34 H	296	29.0	11.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

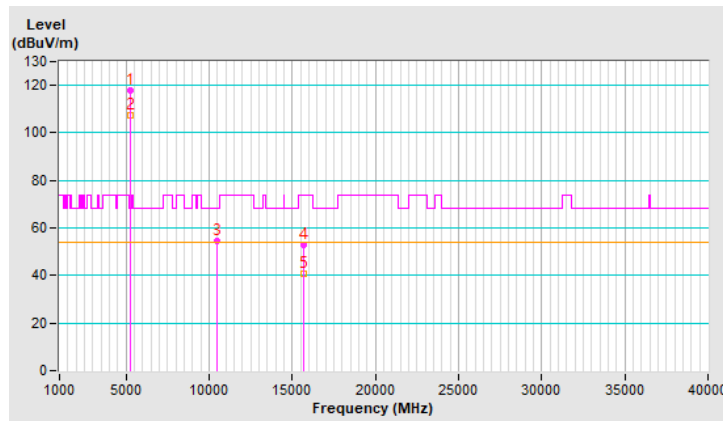


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	110.1 PK			1.50 V	265	108.2	1.9
2	*5240.00	99.9 AV			1.50 V	265	98.0	1.9
3	#10480.00	47.4 PK	68.2	-20.8	1.68 V	298	35.5	11.9
4	15720.00	54.7 PK	74.0	-19.3	2.29 V	276	43.0	11.7
5	15720.00	42.4 AV	54.0	-11.6	2.29 V	276	30.7	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

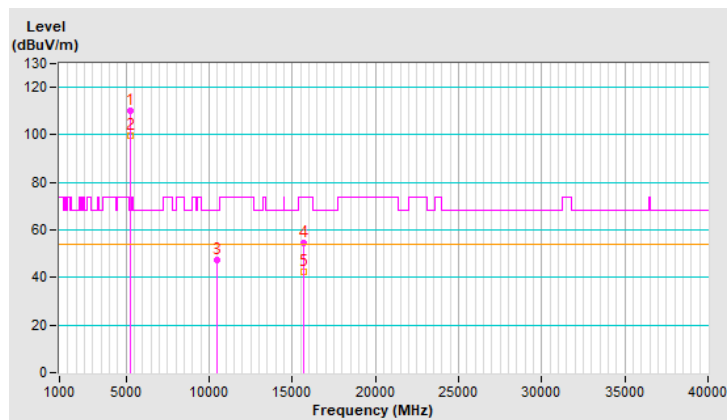


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	118.8 PK			1.39 H	166	117.0	1.8
2	*5260.00	107.8 AV			1.39 H	166	106.0	1.8
3	#10520.00	54.1 PK	68.2	-14.1	1.64 H	260	42.1	12.0
4	15780.00	53.1 PK	74.0	-20.9	1.38 H	278	41.6	11.5
5	15780.00	40.2 AV	54.0	-13.8	1.38 H	278	28.7	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

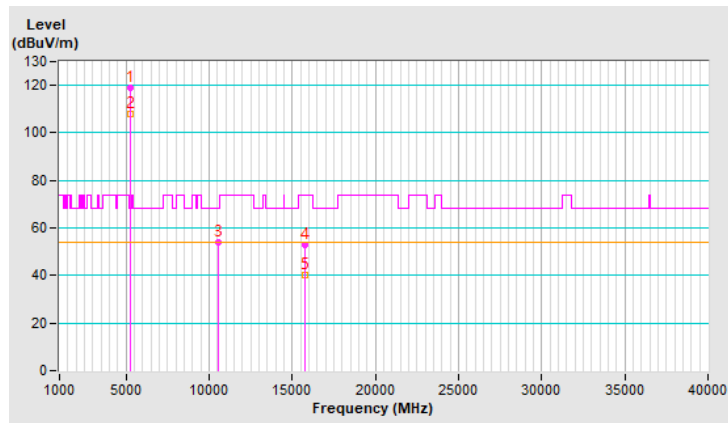




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	109.8 PK			1.54 V	267	108.0	1.8
2	*5260.00	99.6 AV			1.54 V	267	97.8	1.8
3	#10520.00	47.2 PK	68.2	-21.0	1.77 V	291	35.2	12.0
4	15780.00	55.2 PK	74.0	-18.8	2.27 V	277	43.7	11.5
5	15780.00	42.6 AV	54.0	-11.4	2.27 V	277	31.1	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

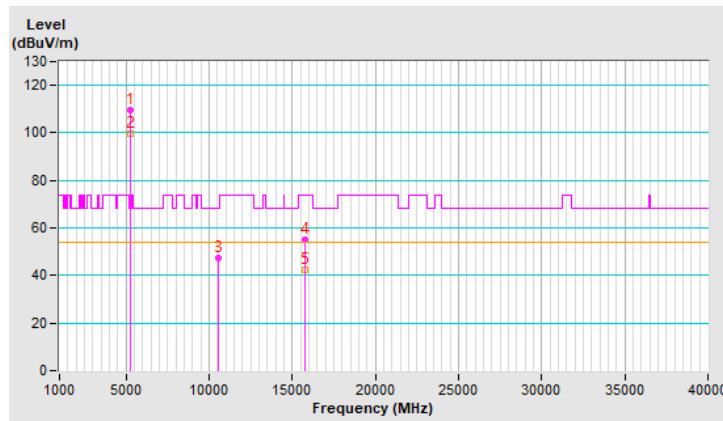


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	118.3 PK			1.47 H	187	116.6	1.7
2	*5300.00	107.5 AV			1.47 H	187	105.8	1.7
3	10600.00	54.2 PK	74.0	-19.8	1.60 H	244	42.5	11.7
4	10600.00	40.9 AV	54.0	-13.1	1.60 H	244	29.2	11.7
5	15900.00	53.4 PK	74.0	-20.6	1.41 H	289	42.3	11.1
6	15900.00	41.0 AV	54.0	-13.0	1.41 H	289	29.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

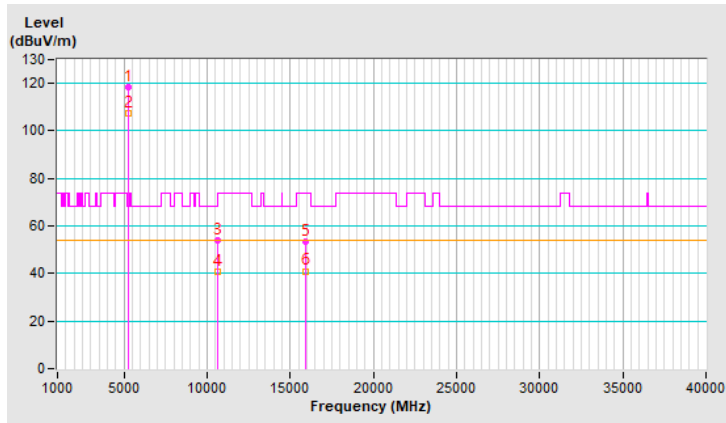


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	110.2 PK			1.49 V	253	108.5	1.7
2	*5300.00	100.0 AV			1.49 V	253	98.3	1.7
3	10600.00	48.3 PK	74.0	-25.7	1.66 V	300	36.6	11.7
4	10600.00	37.4 AV	54.0	-16.6	1.66 V	300	25.7	11.7
5	15900.00	55.1 PK	74.0	-18.9	2.32 V	279	44.0	11.1
6	15900.00	42.9 AV	54.0	-11.1	2.32 V	279	31.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

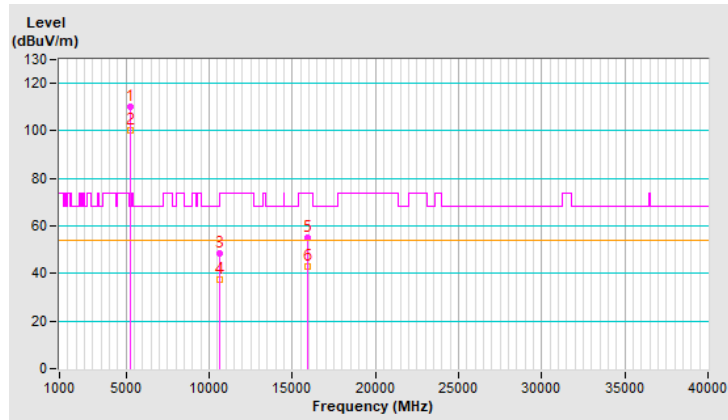


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	119.5 PK			1.40 H	177	117.8	1.7
2	*5320.00	109.1 AV			1.40 H	177	107.4	1.7
3	5350.00	62.2 PK	74.0	-11.8	1.40 H	177	60.2	2.0
4	5350.00	44.3 AV	54.0	-9.7	1.40 H	177	42.3	2.0
5	5354.50	72.1 PK	74.0	-1.9	1.40 H	177	70.2	1.9
6	5354.50	42.9 AV	54.0	-11.1	1.40 H	177	41.0	1.9
7	10640.00	54.9 PK	74.0	-19.1	1.59 H	244	43.3	11.6
8	10640.00	41.5 AV	54.0	-12.5	1.59 H	244	29.9	11.6
9	15960.00	53.2 PK	74.0	-20.8	1.44 H	299	41.8	11.4
10	15960.00	40.6 AV	54.0	-13.4	1.44 H	299	29.2	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

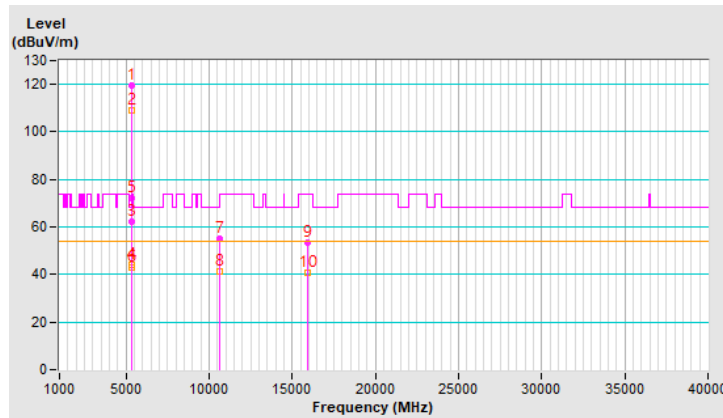


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	110.4 PK			1.48 V	260	108.7	1.7
2	*5320.00	100.2 AV			1.48 V	260	98.5	1.7
3	5350.00	49.3 PK	74.0	-24.7	1.48 V	260	47.3	2.0
4	5350.00	40.0 AV	54.0	-14.0	1.48 V	260	38.0	2.0
5	10640.00	48.0 PK	74.0	-26.0	1.78 V	275	36.4	11.6
6	10640.00	37.3 AV	54.0	-16.7	1.78 V	275	25.7	11.6
7	15960.00	55.6 PK	74.0	-18.4	2.32 V	268	44.2	11.4
8	15960.00	43.2 AV	54.0	-10.8	2.32 V	268	31.8	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

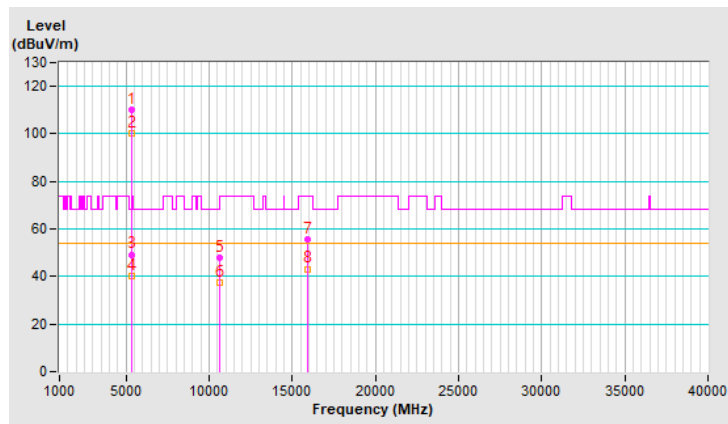


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.6 PK	74.0	-12.4	1.56 H	182	59.4	2.2
2	5460.00	42.5 AV	54.0	-11.5	1.56 H	182	40.3	2.2
3	#5466.37	66.4 PK	68.2	-1.8	1.56 H	182	64.2	2.2
4	*5500.00	116.5 PK			1.56 H	182	114.4	2.1
5	*5500.00	106.1 AV			1.56 H	182	104.0	2.1
6	11000.00	54.7 PK	74.0	-19.3	1.68 H	260	42.6	12.1
7	11000.00	41.4 AV	54.0	-12.6	1.68 H	260	29.3	12.1
8	#16500.00	53.0 PK	68.2	-15.2	1.41 H	297	39.6	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

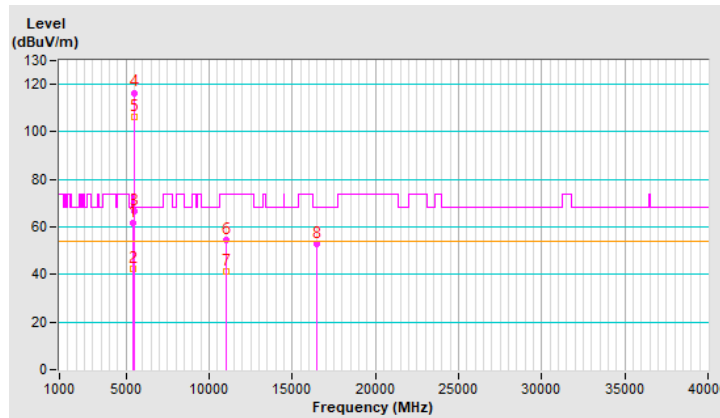


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.7 PK	74.0	-21.3	1.16 V	216	50.5	2.2
2	5460.00	40.4 AV	54.0	-13.6	1.16 V	216	38.2	2.2
3	#5466.37	59.9 PK	68.2	-8.3	1.16 V	216	57.7	2.2
4	*5500.00	110.9 PK			1.16 V	216	108.8	2.1
5	*5500.00	100.9 AV			1.16 V	216	98.8	2.1
6	11000.00	47.6 PK	74.0	-26.4	1.76 V	291	35.5	12.1
7	11000.00	36.7 AV	54.0	-17.3	1.76 V	291	24.6	12.1
8	#16500.00	55.9 PK	68.2	-12.3	2.27 V	256	42.5	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

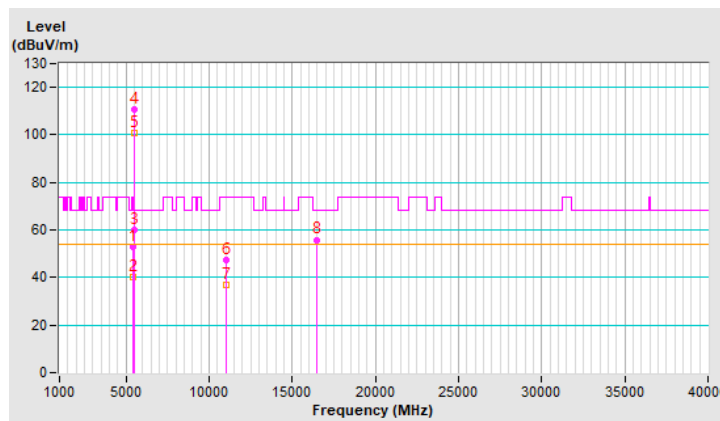


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5580.00	118.2 PK			1.44 H	180	116.0	2.2
2	*5580.00	107.4 AV			1.44 H	180	105.2	2.2
3	11160.00	54.5 PK	74.0	-19.5	1.66 H	247	42.6	11.9
4	11160.00	41.5 AV	54.0	-12.5	1.66 H	247	29.6	11.9
5	#16740.00	53.1 PK	68.2	-15.1	1.38 H	304	37.9	15.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

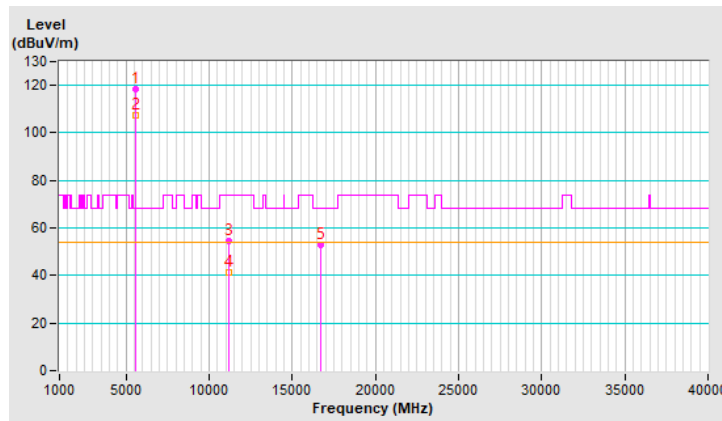


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	111.2 PK			1.19 V	204	109.0	2.2
2	*5580.00	101.1 AV			1.19 V	204	98.9	2.2
3	11160.00	47.8 PK	74.0	-26.2	1.70 V	301	35.9	11.9
4	11160.00	37.2 AV	54.0	-16.8	1.70 V	301	25.3	11.9
5	#16740.00	55.1 PK	68.2	-13.1	2.35 V	261	39.9	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

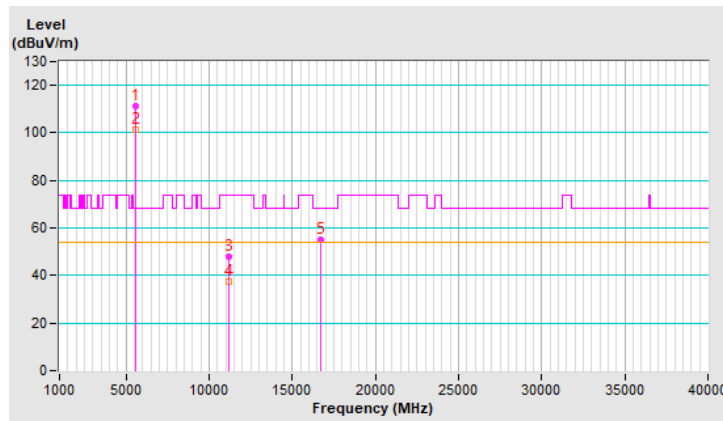


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	115.5 PK			1.45 H	159	113.2	2.3
2	*5700.00	105.1 AV			1.45 H	159	102.8	2.3
3	#5725.00	66.3 PK	68.2	-1.9	1.45 H	159	63.8	2.5
4	11400.00	54.0 PK	74.0	-20.0	1.59 H	260	41.8	12.2
5	11400.00	41.1 AV	54.0	-12.9	1.59 H	260	28.9	12.2
6	#17100.00	53.5 PK	68.2	-14.7	1.43 H	297	36.9	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

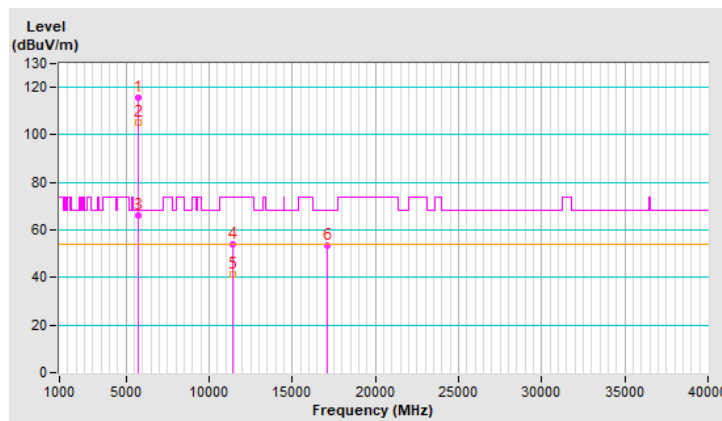


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.5 PK			1.21 V	190	107.2	2.3
2	*5700.00	99.6 AV			1.21 V	190	97.3	2.3
3	#5725.00	61.5 PK	68.2	-6.7	1.21 V	190	59.0	2.5
4	11400.00	47.8 PK	74.0	-26.2	1.71 V	275	35.6	12.2
5	11400.00	37.3 AV	54.0	-16.7	1.71 V	275	25.1	12.2
6	#17100.00	55.5 PK	68.2	-12.7	2.33 V	269	38.9	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

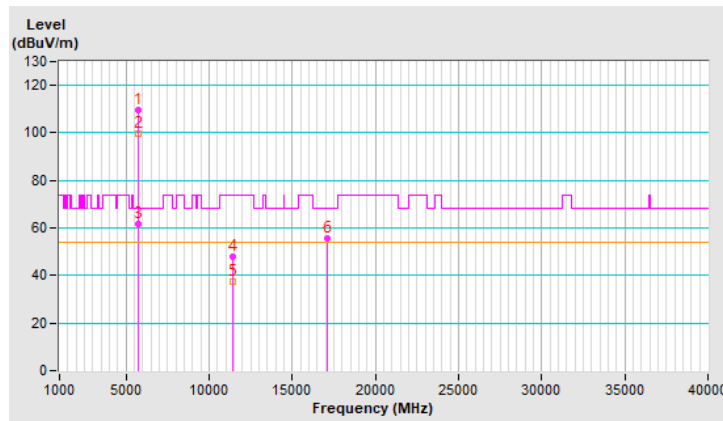


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	5460.00	51.9 PK	74.0	-22.1	1.05 H	285	49.7	2.2
2	5460.00	41.7 AV	54.0	-12.3	1.05 H	285	39.5	2.2
3	#5470.00	54.1 PK	68.2	-14.1	1.05 H	285	51.9	2.2
4	*5720.00	119.1 PK			1.05 H	285	116.7	2.4
5	*5720.00	107.7 AV			1.05 H	285	105.3	2.4
6	#5850.00	54.8 PK	68.2	-13.4	1.05 H	285	51.9	2.9
7	11440.00	54.7 PK	74.0	-19.3	1.58 H	262	42.5	12.2
8	11440.00	41.5 AV	54.0	-12.5	1.58 H	262	29.3	12.2
9	#17160.00	53.2 PK	68.2	-15.0	1.44 H	278	36.7	16.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

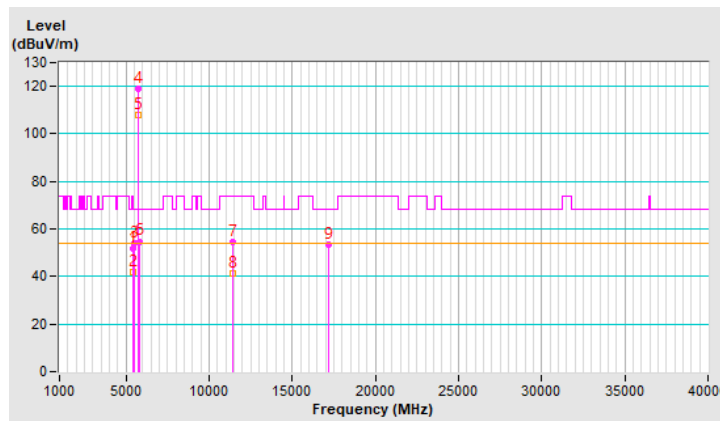


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.2 PK	74.0	-21.8	1.06 V	211	50.0	2.2
2	5460.00	41.7 AV	54.0	-12.3	1.06 V	211	39.5	2.2
3	#5470.00	54.0 PK	68.2	-14.2	1.06 V	211	51.8	2.2
4	*5720.00	110.6 PK			1.06 V	211	108.2	2.4
5	*5720.00	100.9 AV			1.06 V	211	98.5	2.4
6	#5850.00	54.7 PK	68.2	-13.5	1.06 V	211	51.8	2.9
7	11440.00	47.7 PK	74.0	-26.3	1.74 V	297	35.5	12.2
8	11440.00	36.8 AV	54.0	-17.2	1.74 V	297	24.6	12.2
9	#17160.00	54.7 PK	68.2	-13.5	2.34 V	265	38.2	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

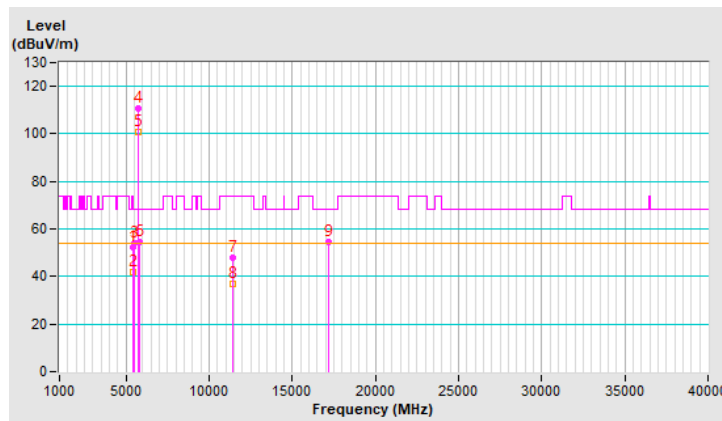




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5637.32	50.6 PK	68.2	-17.6	1.08 H	279	48.3	2.3
2	*5745.00	119.6 PK			1.08 H	279	117.1	2.5
3	*5745.00	108.2 AV			1.08 H	279	105.7	2.5
4	#5929.72	50.7 PK	68.2	-17.5	1.08 H	279	47.8	2.9
5	11490.00	54.8 PK	74.0	-19.2	1.65 H	257	42.4	12.4
6	11490.00	41.6 AV	54.0	-12.4	1.65 H	257	29.2	12.4
7	#17235.00	53.3 PK	68.2	-14.9	1.41 H	300	36.6	16.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

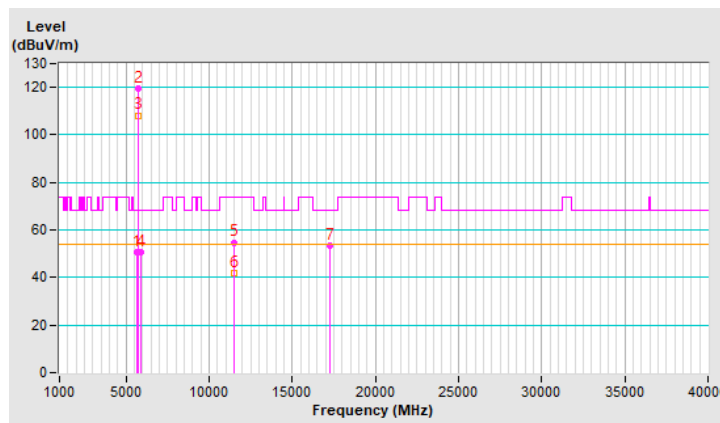




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5570.37	51.4 PK	68.2	-16.8	1.07 V	217	49.2	2.2
2	*5745.00	110.7 PK			1.07 V	217	108.2	2.5
3	*5745.00	100.8 AV			1.07 V	217	98.3	2.5
4	#5968.61	50.4 PK	68.2	-17.8	1.07 V	217	47.5	2.9
5	11490.00	47.4 PK	74.0	-26.6	1.75 V	277	35.0	12.4
6	11490.00	36.6 AV	54.0	-17.4	1.75 V	277	24.2	12.4
7	#17235.00	54.7 PK	68.2	-13.5	2.36 V	281	38.0	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

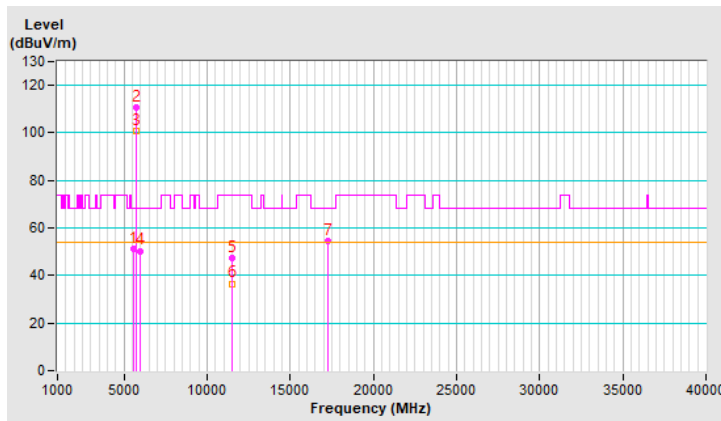


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5620.29	51.3 PK	68.2	-16.9	1.79 H	309	49.1	2.2
2	*5785.00	119.4 PK			1.79 H	309	116.7	2.7
3	*5785.00	108.1 AV			1.79 H	309	105.4	2.7
4	#5975.79	51.3 PK	68.2	-16.9	1.79 H	309	48.4	2.9
5	11570.00	54.0 PK	74.0	-20.0	1.70 H	250	41.6	12.4
6	11570.00	40.8 AV	54.0	-13.2	1.70 H	250	28.4	12.4
7	#17355.00	53.5 PK	68.2	-14.7	1.42 H	289	35.9	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

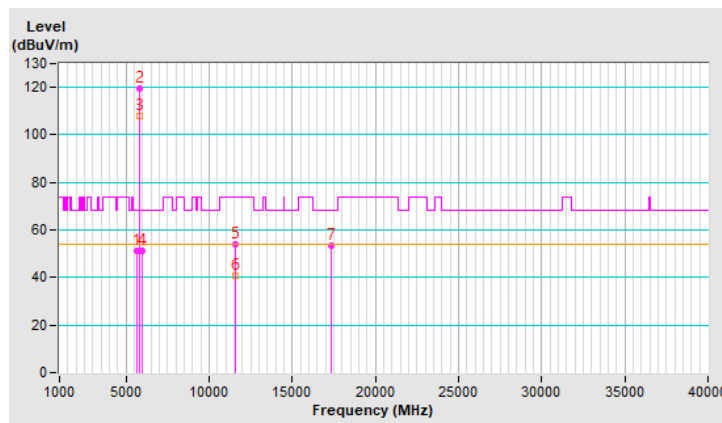


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5613.45	50.1 PK	68.2	-18.1	1.14 V	221	47.9	2.2
2	*5785.00	110.6 PK			1.14 V	221	107.9	2.7
3	*5785.00	100.5 AV			1.14 V	221	97.8	2.7
4	#5981.51	50.1 PK	68.2	-18.1	1.14 V	221	47.2	2.9
5	11570.00	47.8 PK	74.0	-26.2	1.78 V	284	35.4	12.4
6	11570.00	37.3 AV	54.0	-16.7	1.78 V	284	24.9	12.4
7	#17355.00	55.7 PK	68.2	-12.5	2.37 V	276	38.1	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

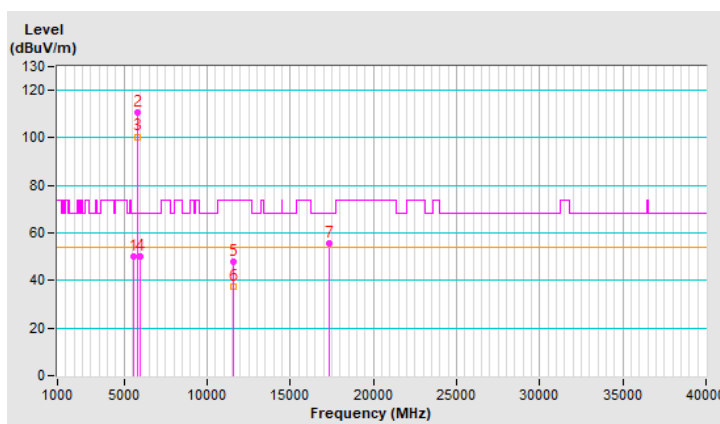


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5628.81	50.7 PK	68.2	-17.5	2.01 H	287	48.4	2.3
2	*5825.00	120.0 PK			2.01 H	287	117.2	2.8
3	*5825.00	109.3 AV			2.01 H	287	106.5	2.8
4	#5936.48	52.1 PK	68.2	-16.1	2.01 H	287	49.2	2.9
5	11650.00	54.6 PK	74.0	-19.4	1.61 H	257	42.7	11.9
6	11650.00	41.1 AV	54.0	-12.9	1.61 H	257	29.2	11.9
7	#17475.00	53.2 PK	68.2	-15.0	1.34 H	290	34.7	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

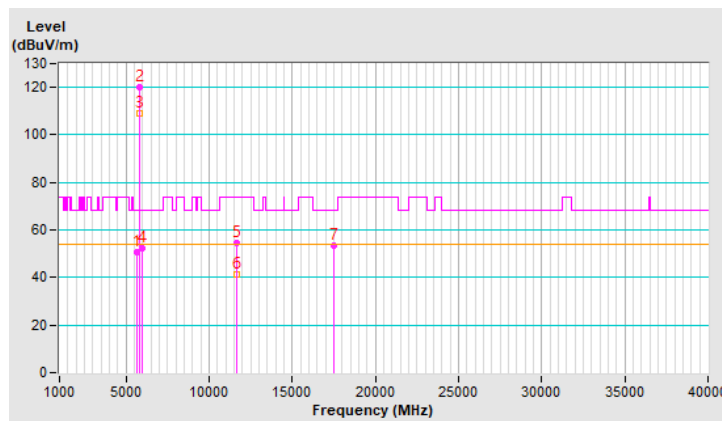


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5580.21	49.7 PK	68.2	-18.5	1.09 V	223	47.5	2.2
2	*5825.00	110.8 PK			1.09 V	223	108.0	2.8
3	*5825.00	100.9 AV			1.09 V	223	98.1	2.8
4	#6006.17	50.4 PK	68.2	-17.8	1.09 V	223	47.5	2.9
5	11650.00	47.7 PK	74.0	-26.3	1.72 V	300	35.8	11.9
6	11650.00	37.0 AV	54.0	-17.0	1.72 V	300	25.1	11.9
7	#17475.00	54.6 PK	68.2	-13.6	2.33 V	275	36.1	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

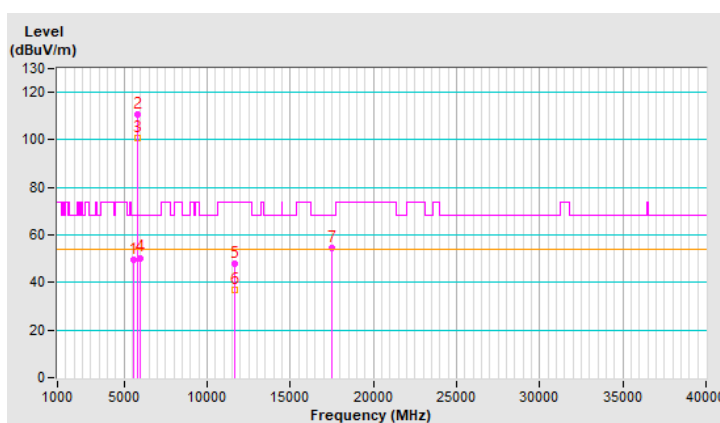


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.0 PK	74.0	-2.0	1.44 H	163	69.6	2.4
2	5150.00	43.2 AV	54.0	-10.8	1.44 H	163	40.8	2.4
3	*5180.00	114.8 PK			1.44 H	163	112.6	2.2
4	*5180.00	104.7 AV			1.44 H	163	102.5	2.2
5	#10360.00	54.3 PK	68.2	-13.9	1.64 H	250	42.6	11.7
6	15540.00	53.8 PK	74.0	-20.2	1.45 H	278	42.0	11.8
7	15540.00	40.9 AV	54.0	-13.1	1.45 H	278	29.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

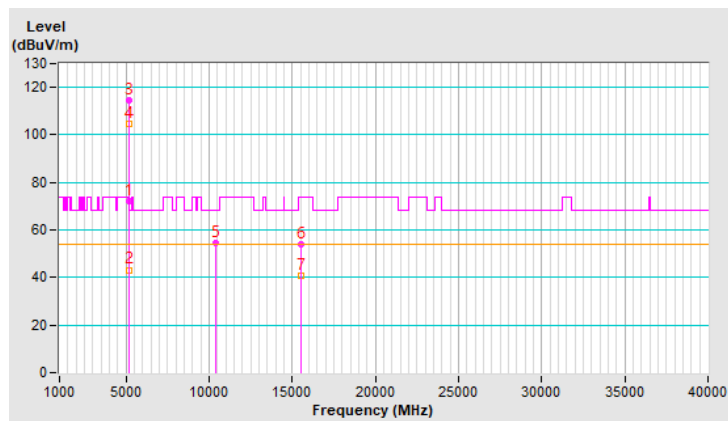


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.2 PK	74.0	-22.8	1.09 V	235	48.8	2.4
2	5150.00	40.0 AV	54.0	-14.0	1.09 V	235	37.6	2.4
3	*5180.00	108.2 PK			1.09 V	235	106.0	2.2
4	*5180.00	98.0 AV			1.09 V	235	95.8	2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

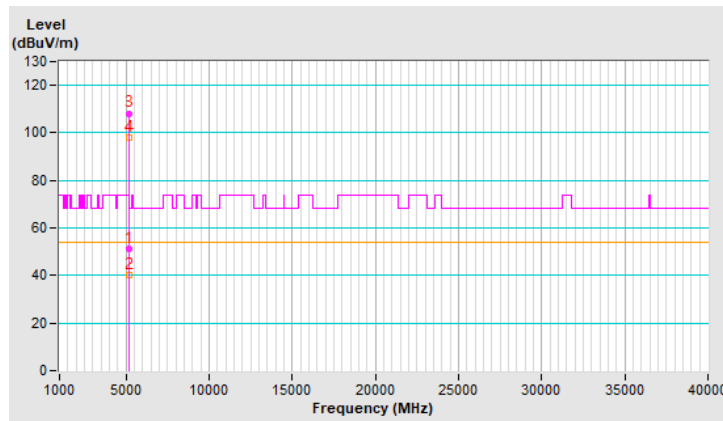


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	114.6 PK			1.40 H	160	112.5	2.1
2	*5200.00	104.7 AV			1.40 H	160	102.6	2.1
3	#10400.00	54.4 PK	68.2	-13.8	1.60 H	259	42.5	11.9
4	15600.00	53.0 PK	74.0	-21.0	1.41 H	286	41.5	11.5
5	15600.00	40.2 AV	54.0	-13.8	1.41 H	286	28.7	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

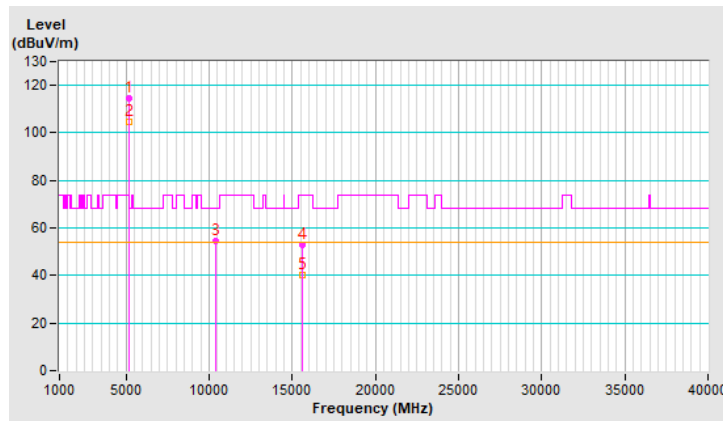


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	108.3 PK			1.10 V	238	106.2	2.1
2	*5200.00	98.5 AV			1.10 V	238	96.4	2.1
3	#10400.00	47.9 PK	68.2	-20.3	1.80 V	279	36.0	11.9
4	15600.00	56.1 PK	74.0	-17.9	2.32 V	264	44.6	11.5
5	15600.00	43.3 AV	54.0	-10.7	2.32 V	264	31.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

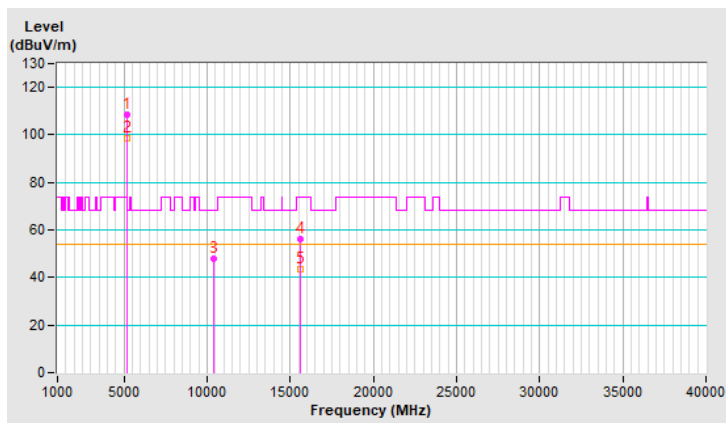


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	114.8 PK			1.48 H	158	112.9	1.9
2	*5240.00	105.0 AV			1.48 H	158	103.1	1.9
3	#10480.00	54.2 PK	68.2	-14.0	1.68 H	261	42.3	11.9
4	15720.00	53.5 PK	74.0	-20.5	1.34 H	285	41.8	11.7
5	15720.00	41.0 AV	54.0	-13.0	1.34 H	285	29.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

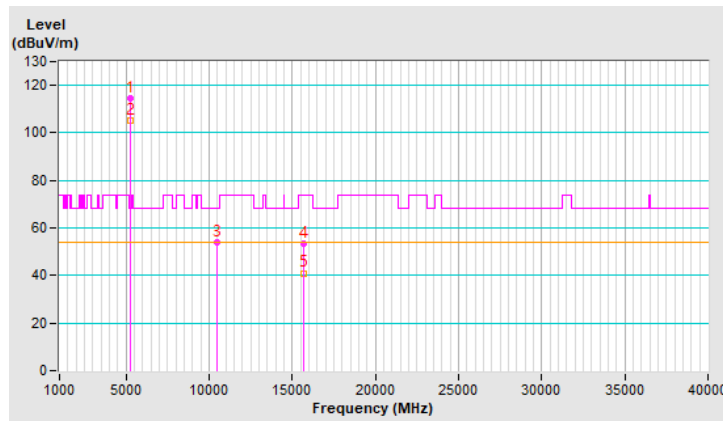




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	109.5 PK			1.15 V	228	107.6	1.9
2	*5240.00	99.3 AV			1.15 V	228	97.4	1.9
3	#10480.00	48.3 PK	68.2	-19.9	1.74 V	282	36.4	11.9
4	15720.00	56.2 PK	74.0	-17.8	2.31 V	282	44.5	11.7
5	15720.00	43.4 AV	54.0	-10.6	2.31 V	282	31.7	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

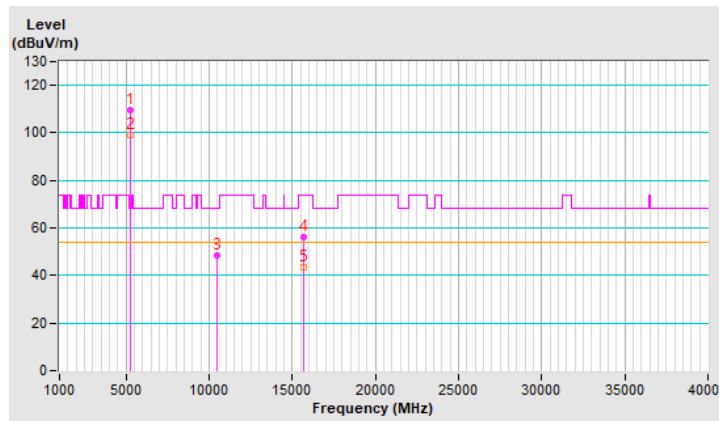


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	115.2 PK			1.46 H	152	113.4	1.8
2	*5260.00	104.9 AV			1.46 H	152	103.1	1.8
3	#10520.00	54.1 PK	68.2	-14.1	1.65 H	254	42.1	12.0
4	15780.00	53.7 PK	74.0	-20.3	1.38 H	298	42.2	11.5
5	15780.00	40.7 AV	54.0	-13.3	1.38 H	298	29.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

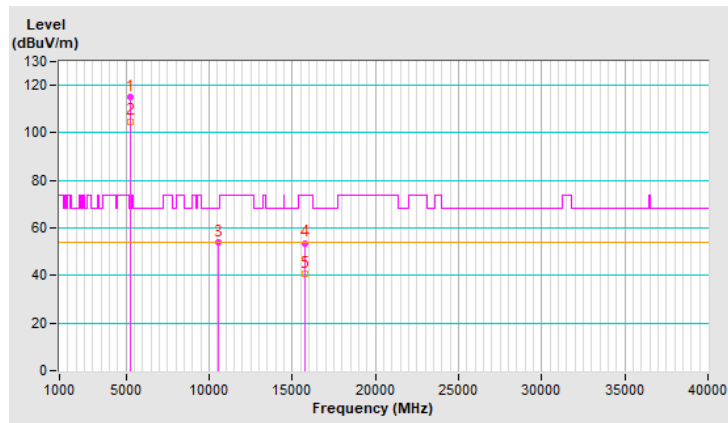




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	109.6 PK			1.13 V	225	107.8	1.8
2	*5260.00	99.4 AV			1.13 V	225	97.6	1.8
3	#10520.00	48.0 PK	68.2	-20.2	1.80 V	284	36.0	12.0
4	15780.00	55.1 PK	74.0	-18.9	2.31 V	272	43.6	11.5
5	15780.00	42.6 AV	54.0	-11.4	2.31 V	272	31.1	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

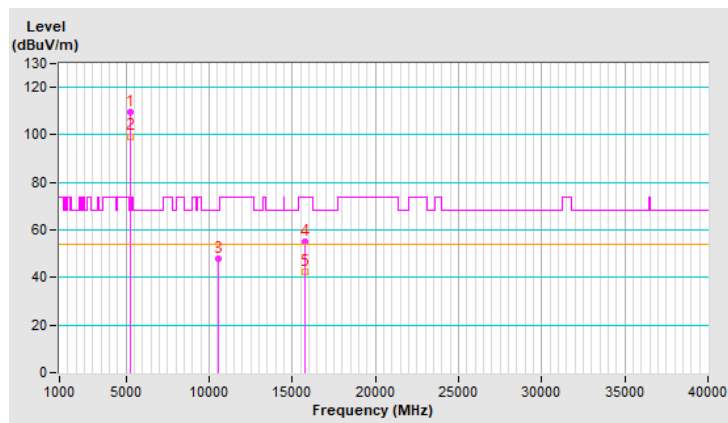


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	114.5 PK			1.43 H	160	112.8	1.7
2	*5300.00	104.6 AV			1.43 H	160	102.9	1.7
3	10600.00	54.8 PK	74.0	-19.2	1.64 H	255	43.1	11.7
4	10600.00	41.6 AV	54.0	-12.4	1.64 H	255	29.9	11.7
5	15900.00	53.5 PK	74.0	-20.5	1.44 H	292	42.4	11.1
6	15900.00	40.5 AV	54.0	-13.5	1.44 H	292	29.4	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

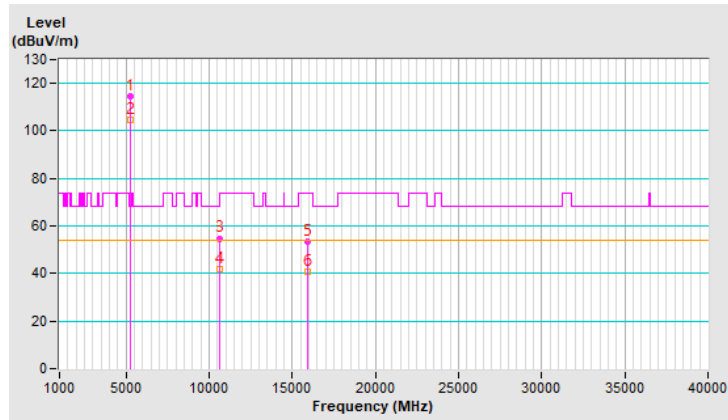


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	109.2 PK			1.07 V	245	107.5	1.7
2	*5300.00	99.0 AV			1.07 V	245	97.3	1.7
3	10600.00	48.1 PK	74.0	-25.9	1.74 V	273	36.4	11.7
4	10600.00	37.5 AV	54.0	-16.5	1.74 V	273	25.8	11.7
5	15900.00	54.9 PK	74.0	-19.1	2.36 V	281	43.8	11.1
6	15900.00	42.5 AV	54.0	-11.5	2.36 V	281	31.4	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

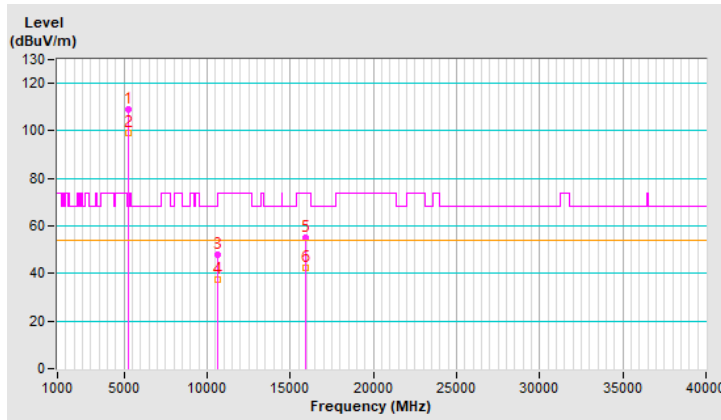


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.5 PK			1.46 H	181	113.8	1.7
2	*5320.00	105.3 AV			1.46 H	181	103.6	1.7
3	5350.00	55.0 PK	74.0	-19.0	1.46 H	181	53.0	2.0
4	5350.00	42.0 AV	54.0	-12.0	1.46 H	181	40.0	2.0
5	5362.50	72.2 PK	74.0	-1.8	1.46 H	181	70.3	1.9
6	5362.50	42.9 AV	54.0	-11.1	1.46 H	181	41.0	1.9
7	10640.00	54.9 PK	74.0	-19.1	1.58 H	248	43.3	11.6
8	10640.00	41.8 AV	54.0	-12.2	1.58 H	248	30.2	11.6
9	15960.00	53.8 PK	74.0	-20.2	1.35 H	290	42.4	11.4
10	15960.00	41.0 AV	54.0	-13.0	1.35 H	290	29.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

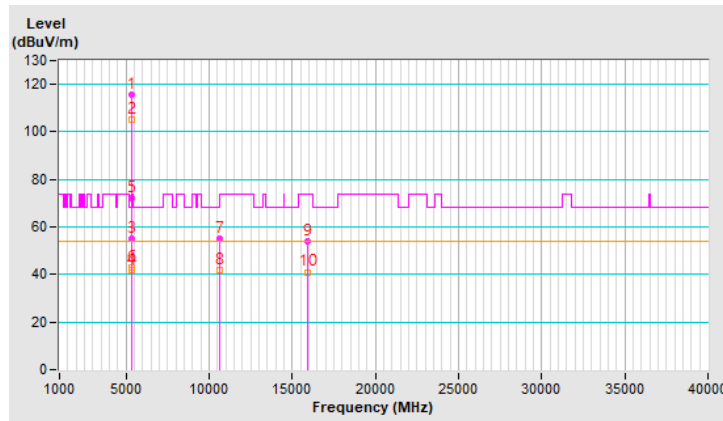


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	109.0 PK			1.13 V	232	107.3	1.7
2	*5320.00	99.0 AV			1.13 V	232	97.3	1.7
3	5350.00	68.5 PK	74.0	-5.5	1.13 V	232	66.5	2.0
4	5350.00	40.5 AV	54.0	-13.5	1.13 V	232	38.5	2.0
5	10640.00	48.4 PK	74.0	-25.6	1.73 V	283	36.8	11.6
6	10640.00	37.5 AV	54.0	-16.5	1.73 V	283	25.9	11.6
7	15960.00	55.3 PK	74.0	-18.7	2.27 V	279	43.9	11.4
8	15960.00	42.7 AV	54.0	-11.3	2.27 V	279	31.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

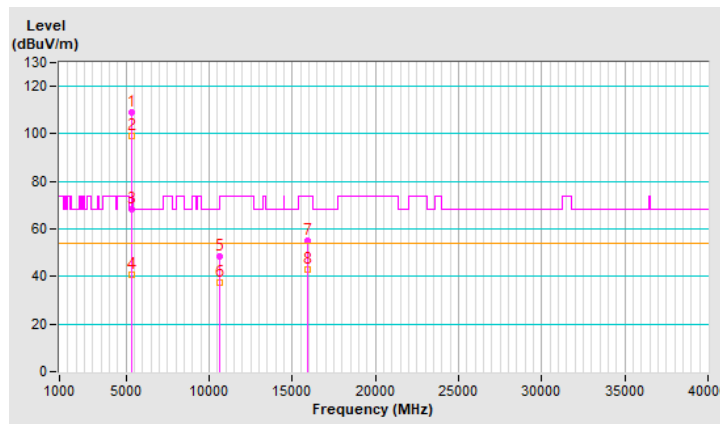


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.8 PK	74.0	-20.2	1.53 H	177	51.6	2.2
2	5460.00	39.7 AV	54.0	-14.3	1.53 H	177	37.5	2.2
3	#5468.35	66.5 PK	68.2	-1.7	1.53 H	177	64.3	2.2
4	*5500.00	113.1 PK			1.53 H	177	111.0	2.1
5	*5500.00	101.7 AV			1.53 H	177	99.6	2.1
6	11000.00	54.3 PK	74.0	-19.7	1.62 H	239	42.2	12.1
7	11000.00	41.3 AV	54.0	-12.7	1.62 H	239	29.2	12.1
8	#16500.00	53.8 PK	68.2	-14.4	1.43 H	294	40.4	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

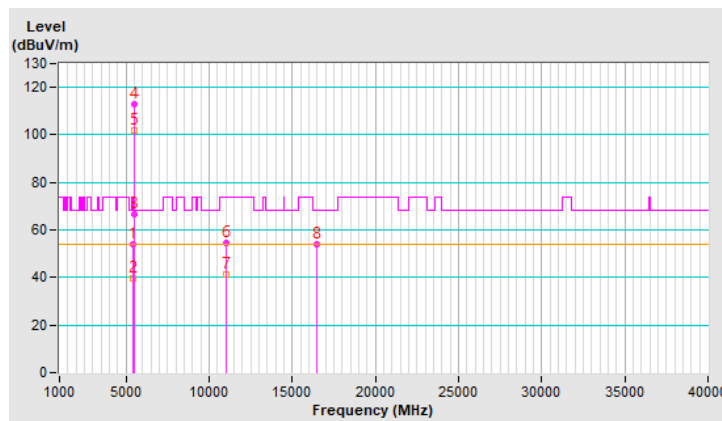


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.5 PK	74.0	-22.5	1.05 V	211	49.3	2.2
2	5460.00	39.4 AV	54.0	-14.6	1.05 V	211	37.2	2.2
3	#5468.35	60.8 PK	68.2	-7.4	1.05 V	211	58.6	2.2
4	*5500.00	109.7 PK			1.05 V	211	107.6	2.1
5	*5500.00	98.6 AV			1.05 V	211	96.5	2.1
6	11000.00	47.8 PK	74.0	-26.2	1.73 V	276	35.7	12.1
7	11000.00	37.2 AV	54.0	-16.8	1.73 V	276	25.1	12.1
8	#16500.00	55.6 PK	68.2	-12.6	2.32 V	264	42.2	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

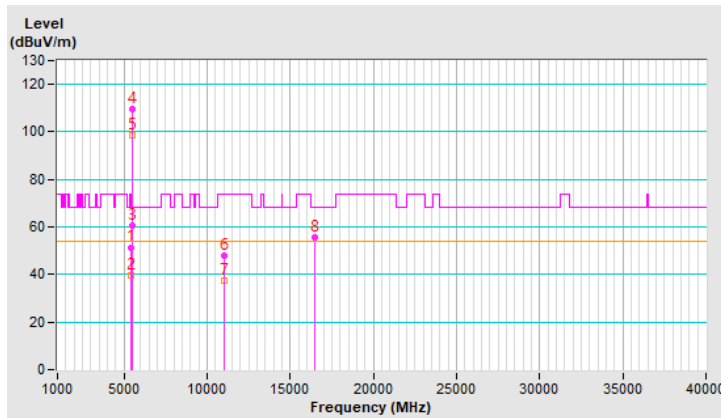




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5580.00	115.5 PK			1.47 H	167	113.3	2.2
2	*5580.00	105.3 AV			1.47 H	167	103.1	2.2
3	11160.00	54.5 PK	74.0	-19.5	1.62 H	265	42.6	11.9
4	11160.00	41.4 AV	54.0	-12.6	1.62 H	265	29.5	11.9
5	#16740.00	53.8 PK	68.2	-14.4	1.44 H	293	38.6	15.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

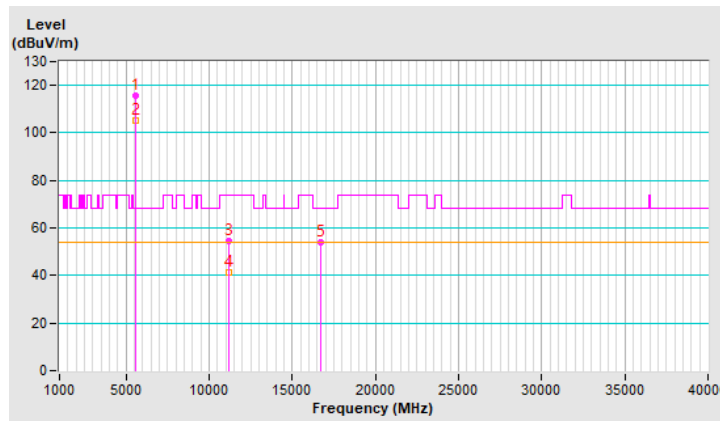




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	109.3 PK			1.13 V	224	107.1	2.2
2	*5580.00	99.2 AV			1.13 V	224	97.0	2.2
3	11160.00	48.7 PK	74.0	-25.3	1.78 V	280	36.8	11.9
4	11160.00	37.9 AV	54.0	-16.1	1.78 V	280	26.0	11.9
5	#16740.00	55.4 PK	68.2	-12.8	2.30 V	259	40.2	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

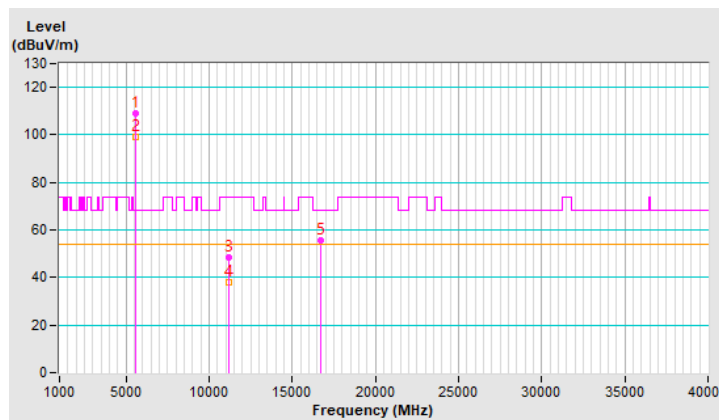


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.8 PK			1.37 H	162	110.5	2.3
2	*5700.00	102.5 AV			1.37 H	162	100.2	2.3
3	#5725.00	66.2 PK	68.2	-2.0	1.37 H	162	63.7	2.5
4	11400.00	54.3 PK	74.0	-19.7	1.61 H	239	42.1	12.2
5	11400.00	41.2 AV	54.0	-12.8	1.61 H	239	29.0	12.2
6	#17100.00	53.4 PK	68.2	-14.8	1.39 H	299	36.8	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

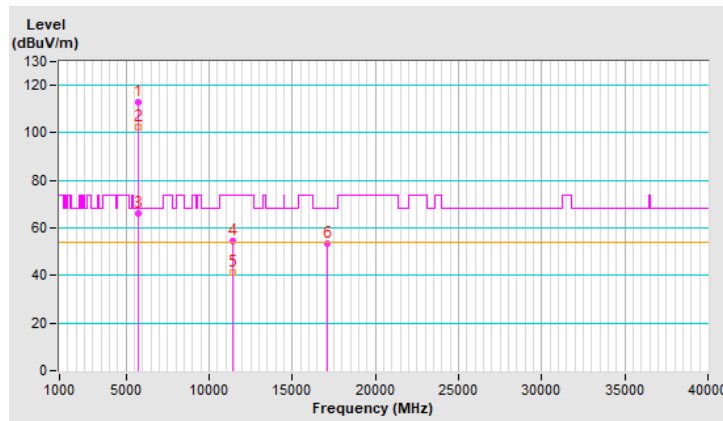


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	110.1 PK			1.10 V	209	107.8	2.3
2	*5700.00	98.9 AV			1.10 V	209	96.6	2.3
3	#5725.00	62.4 PK	68.2	-5.8	1.10 V	209	59.9	2.5
4	11400.00	48.1 PK	74.0	-25.9	1.80 V	299	35.9	12.2
5	11400.00	37.1 AV	54.0	-16.9	1.80 V	299	24.9	12.2
6	#17100.00	55.3 PK	68.2	-12.9	2.28 V	277	38.7	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

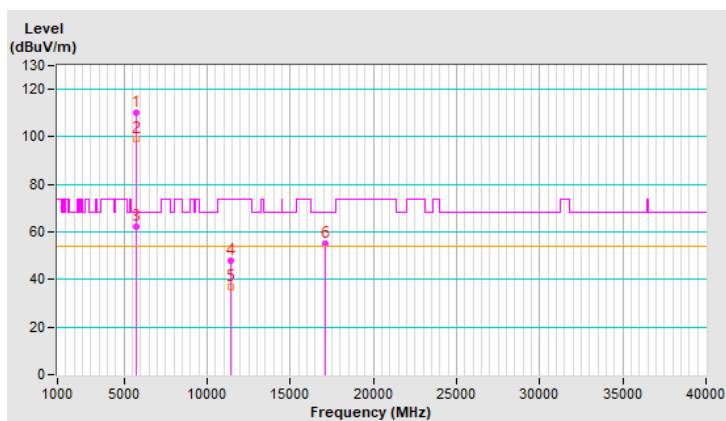


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	5460.00	51.8 PK	74.0	-22.2	1.45 H	148	49.6	2.2
2	5460.00	41.6 AV	54.0	-12.4	1.45 H	148	39.4	2.2
3	#5470.00	54.1 PK	68.2	-14.1	1.45 H	148	51.9	2.2
4	*5720.00	115.5 PK			1.45 H	148	113.1	2.4
5	*5720.00	105.2 AV			1.45 H	148	102.8	2.4
6	#5850.00	55.0 PK	68.2	-13.2	1.45 H	148	52.1	2.9
7	11440.00	54.6 PK	74.0	-19.4	1.67 H	243	42.4	12.2
8	11440.00	41.5 AV	54.0	-12.5	1.67 H	243	29.3	12.2
9	#17160.00	52.9 PK	68.2	-15.3	1.38 H	279	36.4	16.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

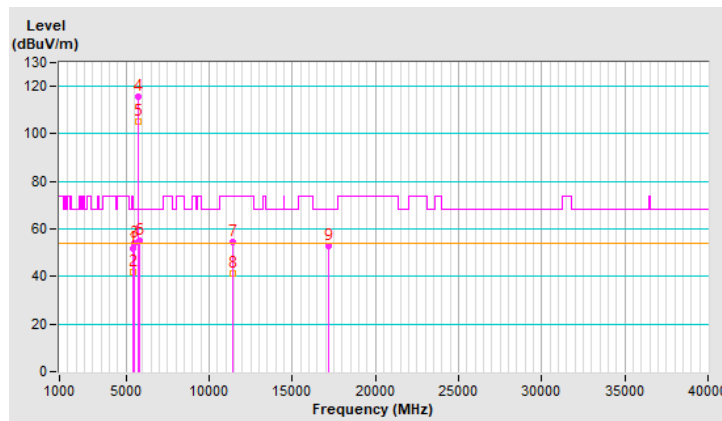




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.3 PK	74.0	-21.7	1.17 V	238	50.1	2.2
2	5460.00	41.9 AV	54.0	-12.1	1.17 V	238	39.7	2.2
3	#5470.00	53.7 PK	68.2	-14.5	1.17 V	238	51.5	2.2
4	*5720.00	110.0 PK			1.17 V	238	107.6	2.4
5	*5720.00	99.6 AV			1.17 V	238	97.2	2.4
6	#5850.00	55.6 PK	68.2	-12.6	1.17 V	238	52.7	2.9
7	11440.00	47.9 PK	74.0	-26.1	1.73 V	299	35.7	12.2
8	11440.00	37.0 AV	54.0	-17.0	1.73 V	299	24.8	12.2
9	#17160.00	55.6 PK	68.2	-12.6	2.32 V	256	39.1	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

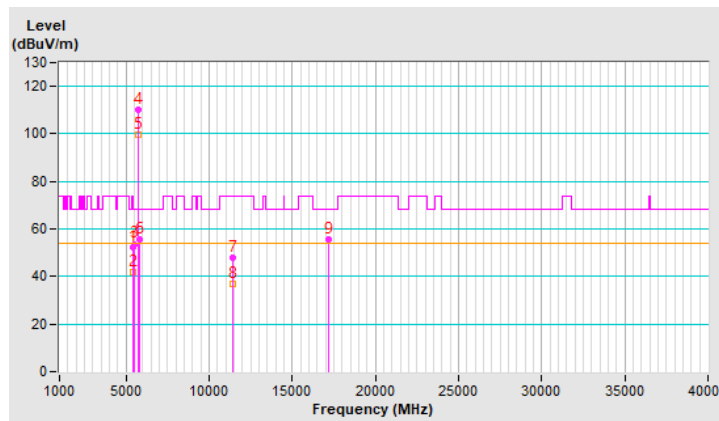




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5611.96	50.5 PK	68.2	-17.7	1.12 H	282	48.3	2.2
2	*5745.00	116.2 PK			1.12 H	282	113.7	2.5
3	*5745.00	106.0 AV			1.12 H	282	103.5	2.5
4	#6016.88	51.3 PK	68.2	-16.9	1.12 H	282	48.3	3.0
5	11490.00	53.9 PK	74.0	-20.1	1.63 H	251	41.5	12.4
6	11490.00	40.8 AV	54.0	-13.2	1.63 H	251	28.4	12.4
7	#17235.00	53.8 PK	68.2	-14.4	1.36 H	305	37.1	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

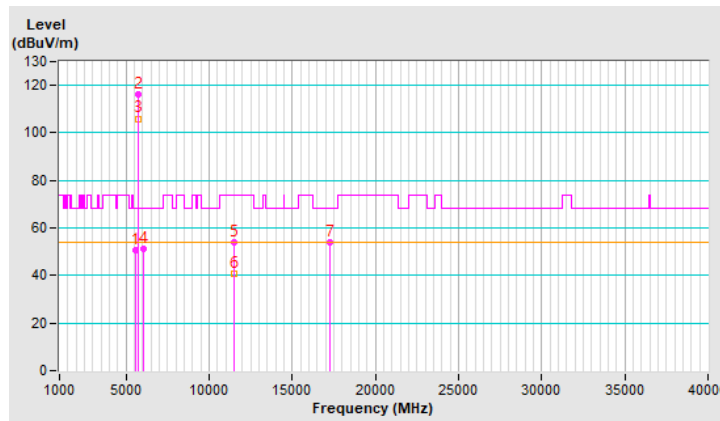


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5598.22	50.1 PK	68.2	-18.1	1.18 V	152	47.9	2.2
2	*5745.00	109.6 PK			1.18 V	152	107.1	2.5
3	*5745.00	98.9 AV			1.18 V	152	96.4	2.5
4	#5952.44	50.5 PK	68.2	-17.7	1.18 V	152	47.6	2.9
5	11490.00	47.6 PK	74.0	-26.4	1.80 V	282	35.2	12.4
6	11490.00	37.1 AV	54.0	-16.9	1.80 V	282	24.7	12.4
7	#17235.00	55.7 PK	68.2	-12.5	2.37 V	282	39.0	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

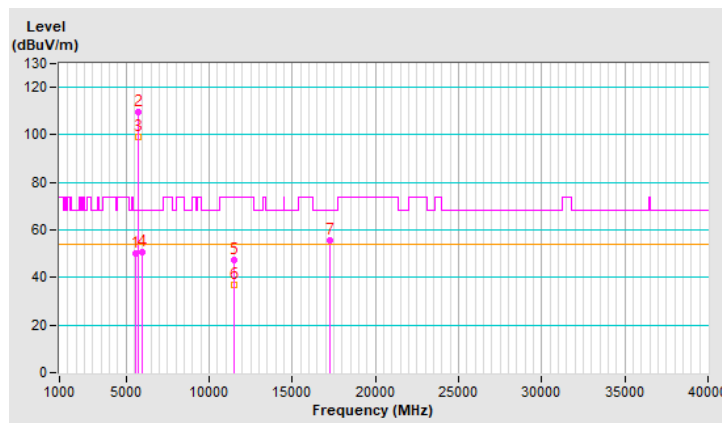


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5588.31	50.5 PK	68.2	-17.7	1.70 H	295	48.3	2.2
2	*5785.00	116.4 PK			1.70 H	295	113.7	2.7
3	*5785.00	106.1 AV			1.70 H	295	103.4	2.7
4	#5949.32	50.6 PK	68.2	-17.6	1.70 H	295	47.7	2.9
5	11570.00	54.3 PK	74.0	-19.7	1.65 H	237	41.9	12.4
6	11570.00	41.2 AV	54.0	-12.8	1.65 H	237	28.8	12.4
7	#17355.00	53.6 PK	68.2	-14.6	1.39 H	294	36.0	17.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

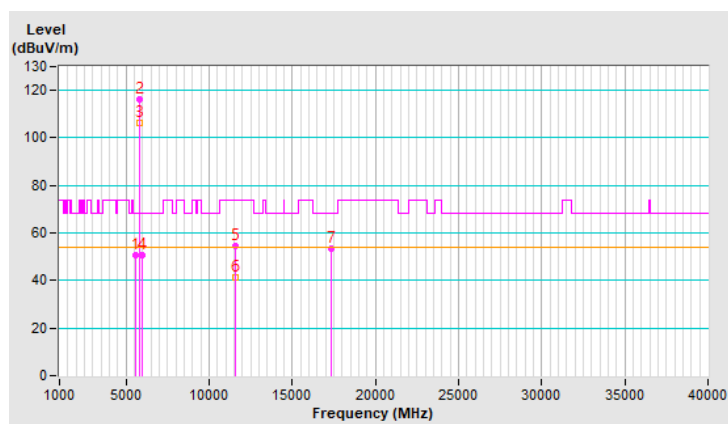




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5561.49	50.6 PK	68.2	-17.6	1.18 V	154	48.4	2.2
2	*5785.00	108.8 PK			1.18 V	154	106.1	2.7
3	*5785.00	98.8 AV			1.18 V	154	96.1	2.7
4	#5943.68	51.7 PK	68.2	-16.5	1.18 V	154	48.8	2.9
5	11570.00	47.5 PK	74.0	-26.5	1.73 V	287	35.1	12.4
6	11570.00	37.0 AV	54.0	-17.0	1.73 V	287	24.6	12.4
7	#17355.00	55.6 PK	68.2	-12.6	2.34 V	280	38.0	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

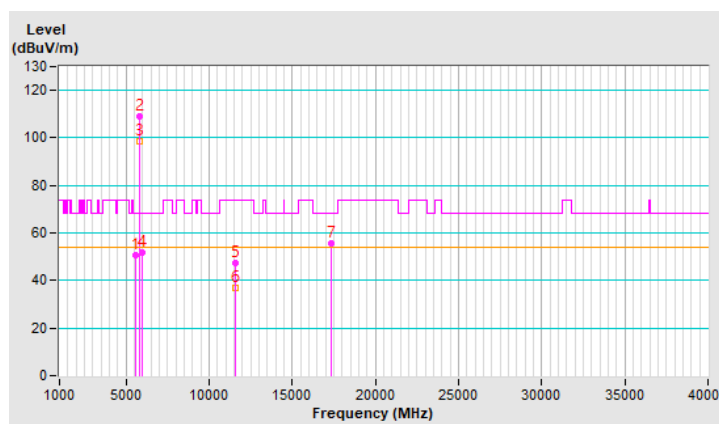


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5641.62	50.4 PK	68.2	-17.8	1.98 H	300	48.1	2.3
2	*5825.00	117.3 PK			1.98 H	300	114.5	2.8
3	*5825.00	107.2 AV			1.98 H	300	104.4	2.8
4	#5940.18	51.9 PK	68.2	-16.3	1.98 H	300	49.0	2.9
5	11650.00	55.2 PK	74.0	-18.8	1.64 H	241	43.3	11.9
6	11650.00	41.7 AV	54.0	-12.3	1.64 H	241	29.8	11.9
7	#17475.00	53.0 PK	68.2	-15.2	1.38 H	291	34.5	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

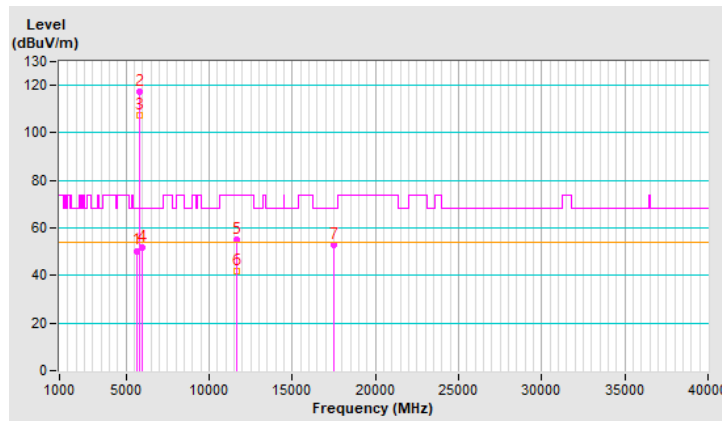




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5591.88	50.0 PK	68.2	-18.2	1.09 V	154	47.8	2.2
2	*5825.00	109.8 PK			1.09 V	154	107.0	2.8
3	*5825.00	100.0 AV			1.09 V	154	97.2	2.8
4	#5950.02	51.9 PK	68.2	-16.3	1.09 V	154	49.0	2.9
5	11650.00	48.0 PK	74.0	-26.0	1.75 V	277	36.1	11.9
6	11650.00	37.5 AV	54.0	-16.5	1.75 V	277	25.6	11.9
7	#17475.00	55.2 PK	68.2	-13.0	2.34 V	279	36.7	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

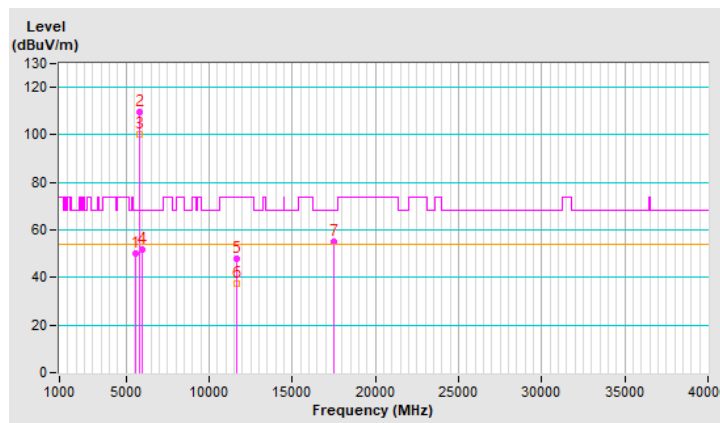


Mode B_Plot of Band Edge

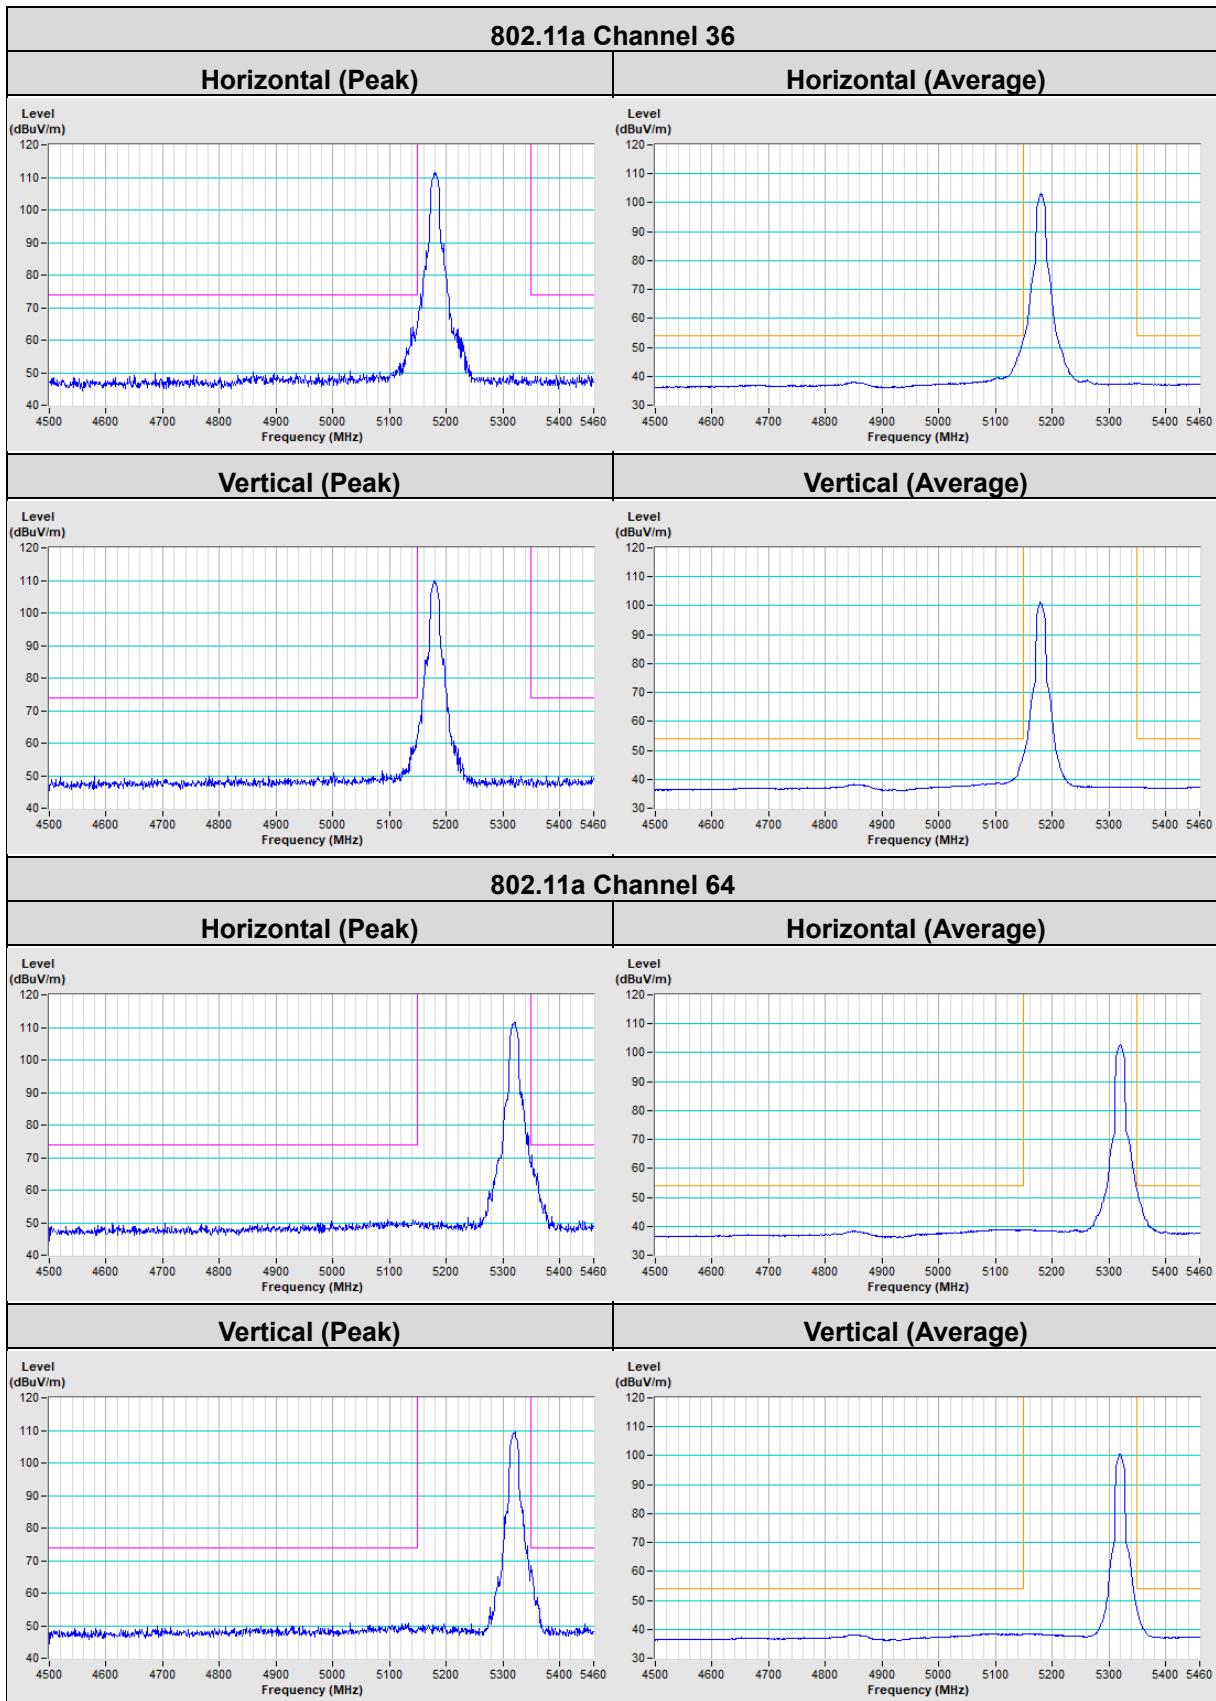


802.11a Channel 100

Horizontal (Peak) **Horizontal (Average)**

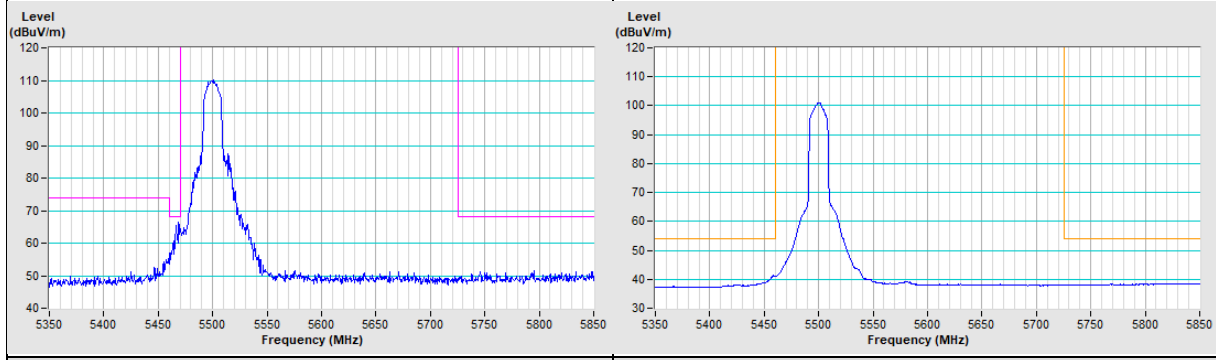


Vertical (Peak) **Vertical (Average)**

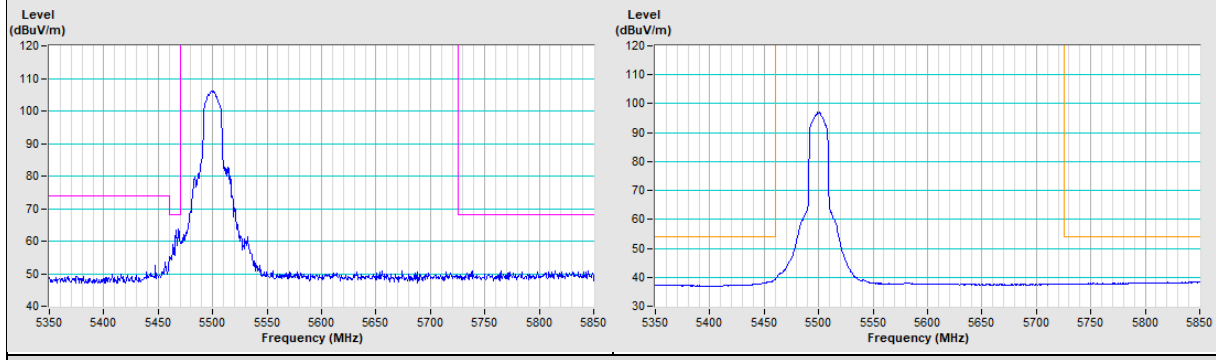


802.11a Channel 149

Horizontal (Peak) **Vertical (Peak)**

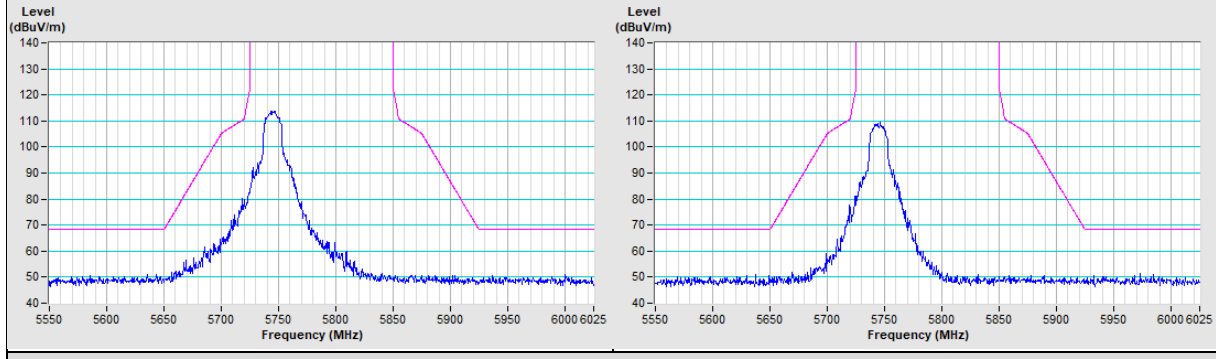

802.11a Channel 157


Horizontal (Peak) **Vertical (Peak)**

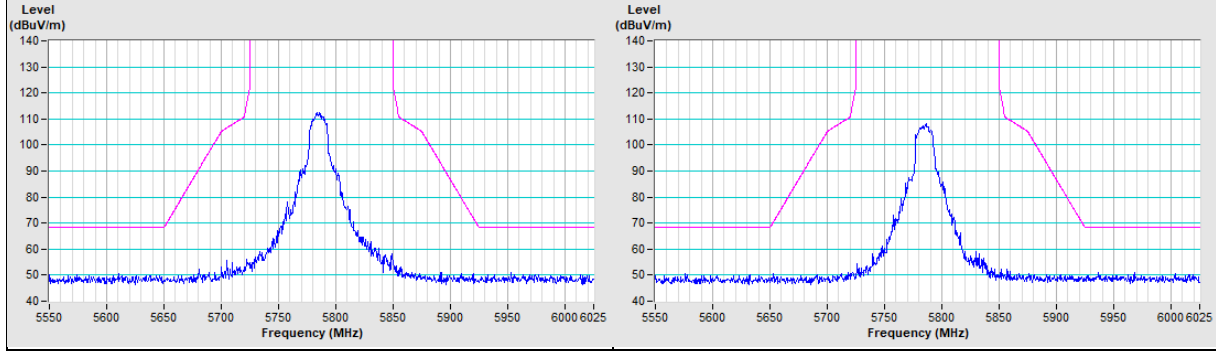



802.11a Channel 165

Horizontal (Peak)



Vertical (Peak)

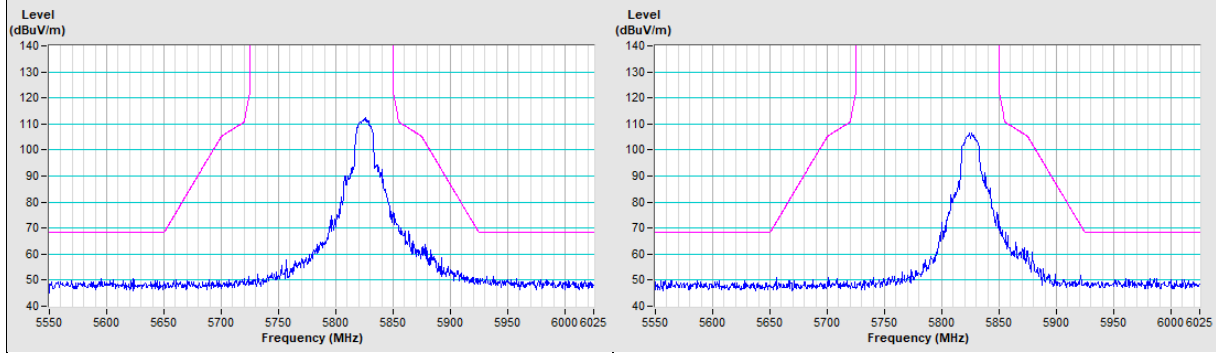

802.11ax (HE20) Channel 36

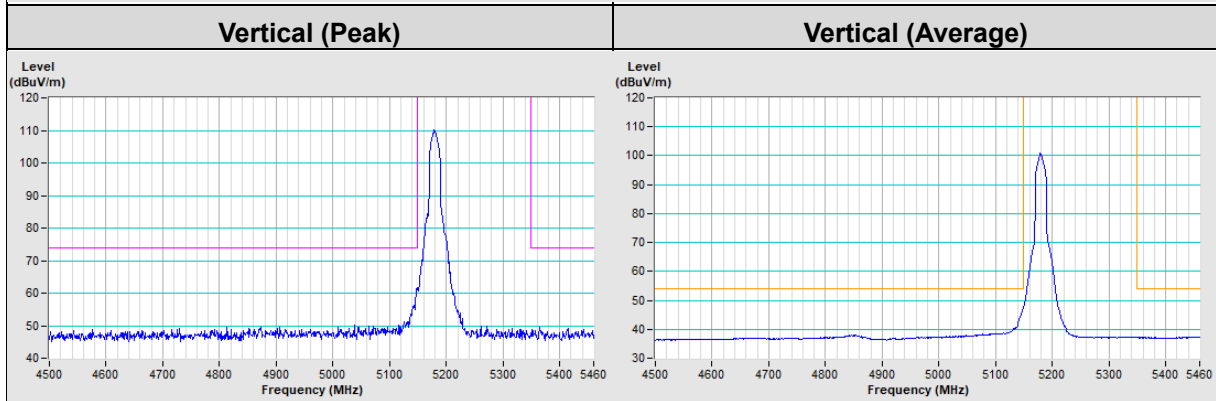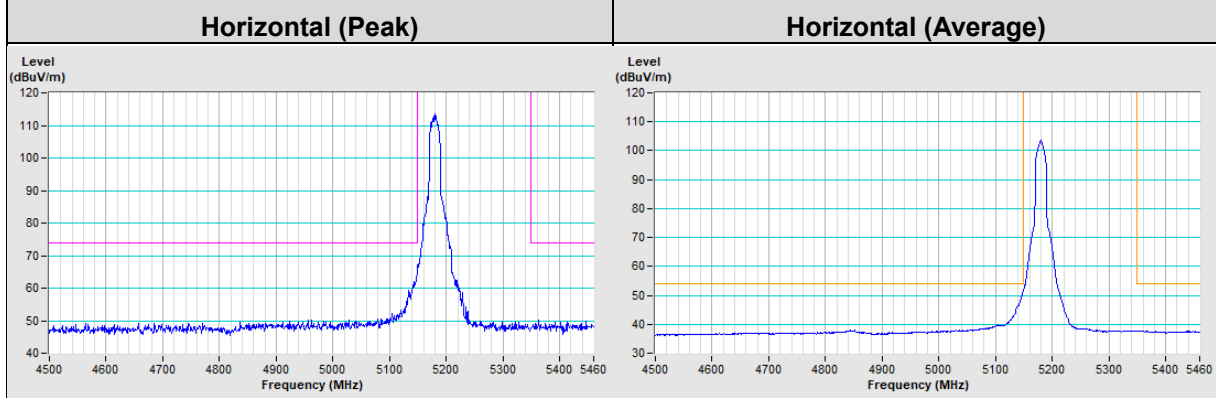


802.11ax (HE20) Channel 64

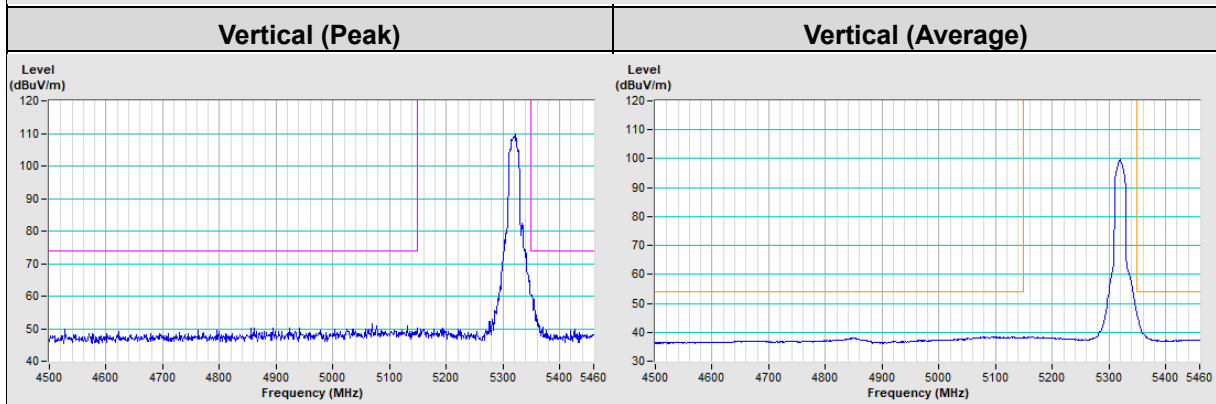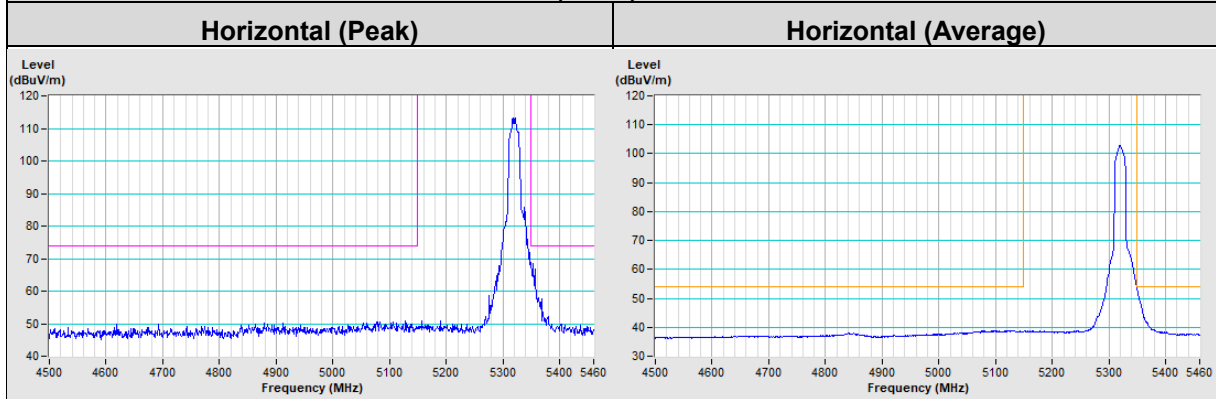


802.11ax (HE20) Channel 100

Horizontal (Peak) **Horizontal (Average)**

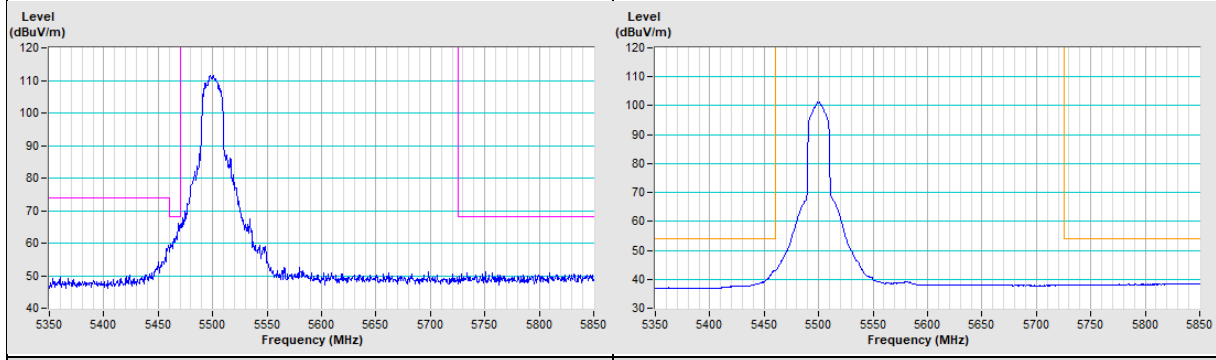


Vertical (Peak) **Vertical (Average)**

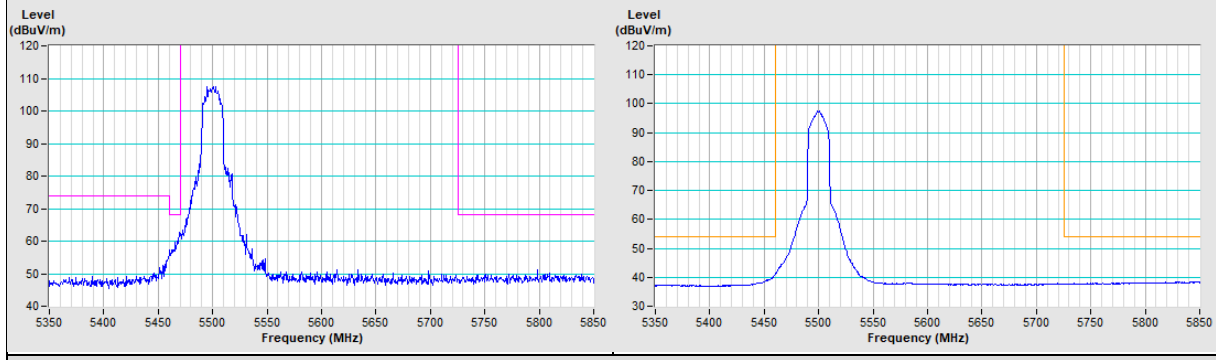


802.11ax (HE20) Channel 149

Horizontal (Peak) **Vertical (Peak)**

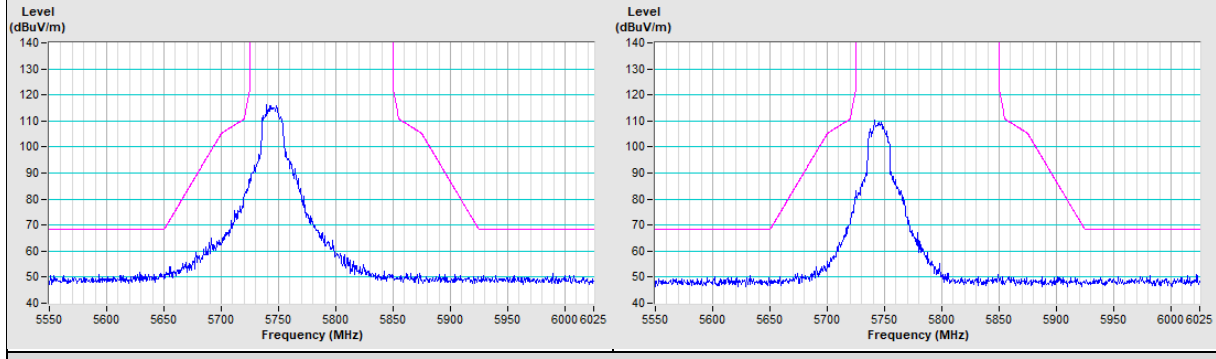

802.11ax (HE20) Channel 157

Horizontal (Peak) **Vertical (Peak)**

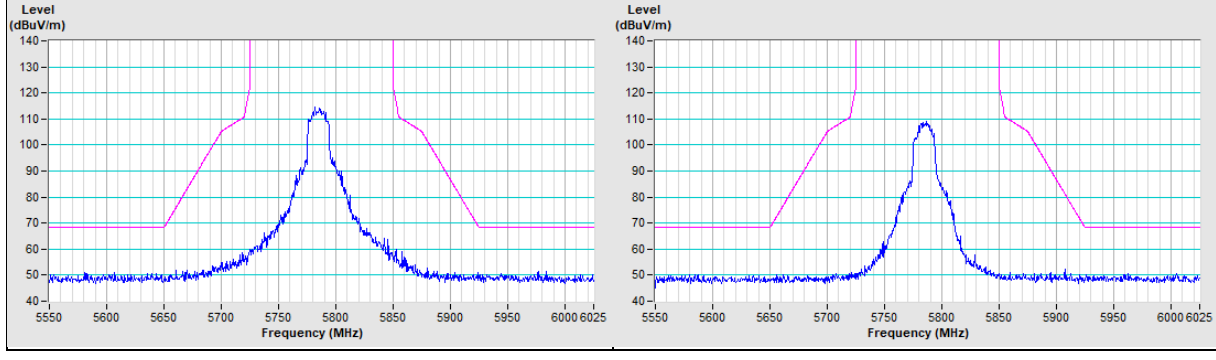




802.11ax (HE20) Channel 165



Horizontal (Peak)

Vertical (Peak)

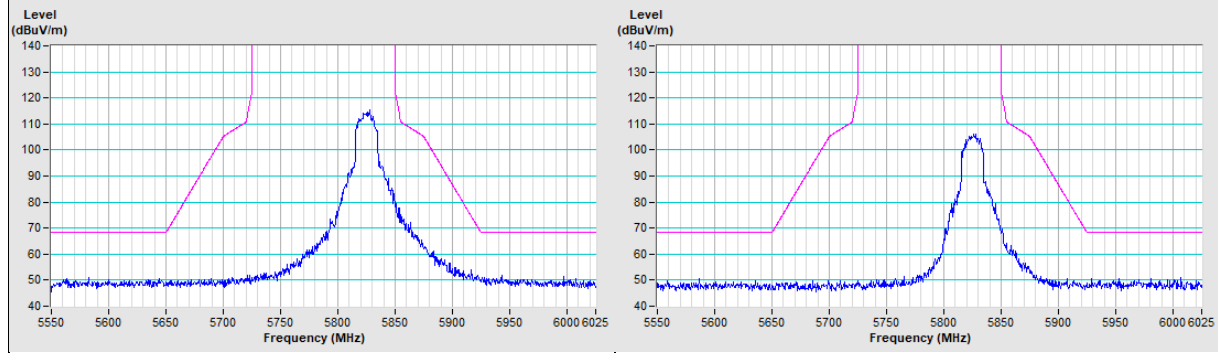



802.11ax (HE40) Channel 38

Horizontal (Peak) **Horizontal (Average)**

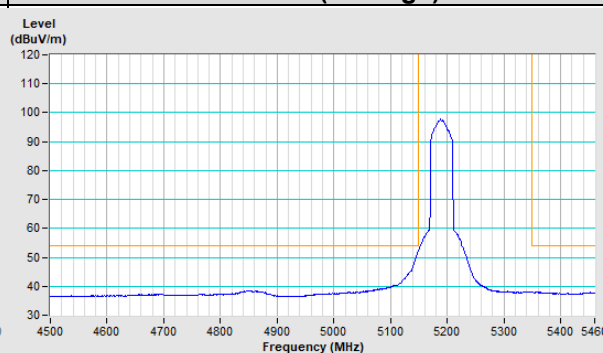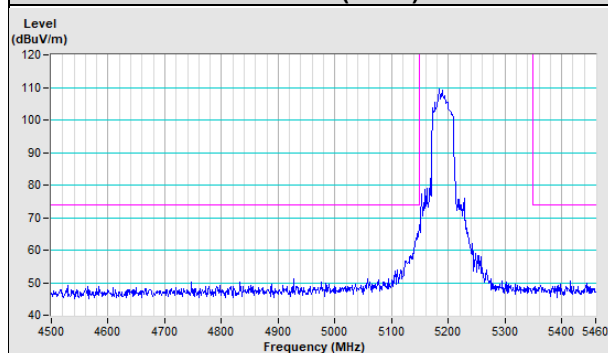



Vertical (Peak)

Vertical (Average)

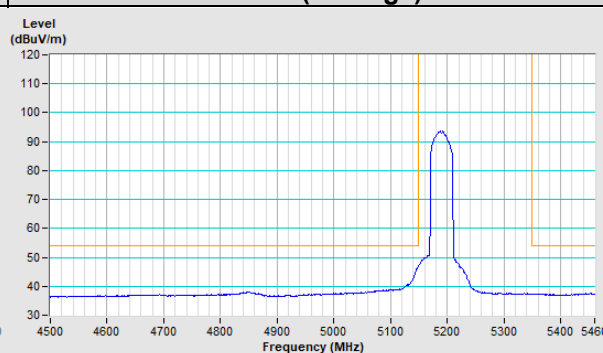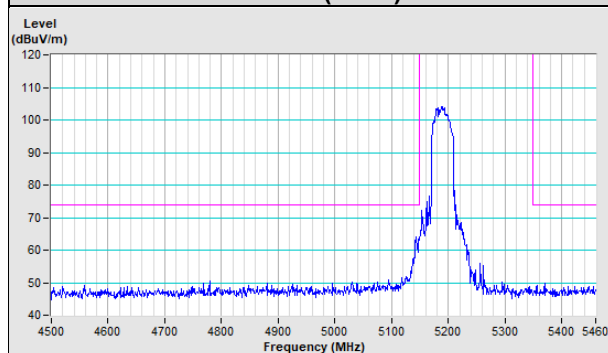



802.11ax (HE40) Channel 62

Horizontal (Peak) **Horizontal (Average)**

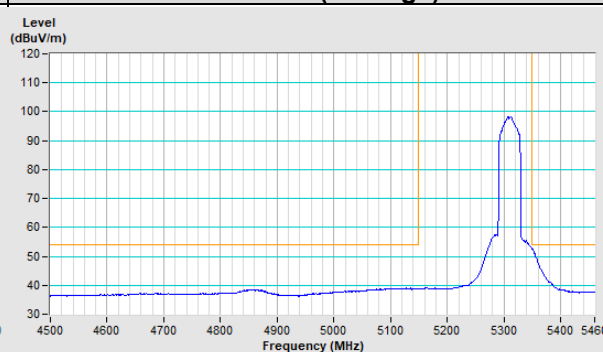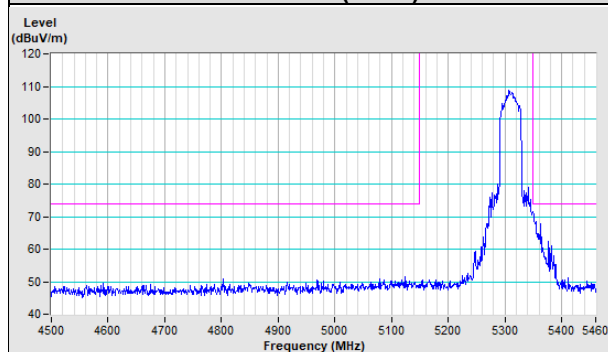


Vertical (Peak)

Vertical (Average)

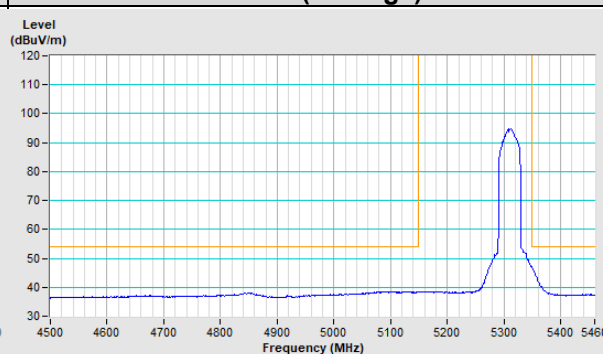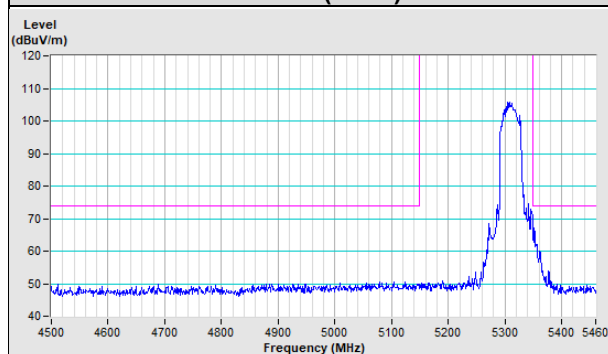


802.11ax (HE40) Channel 102

Horizontal (Peak) **Horizontal (Average)**

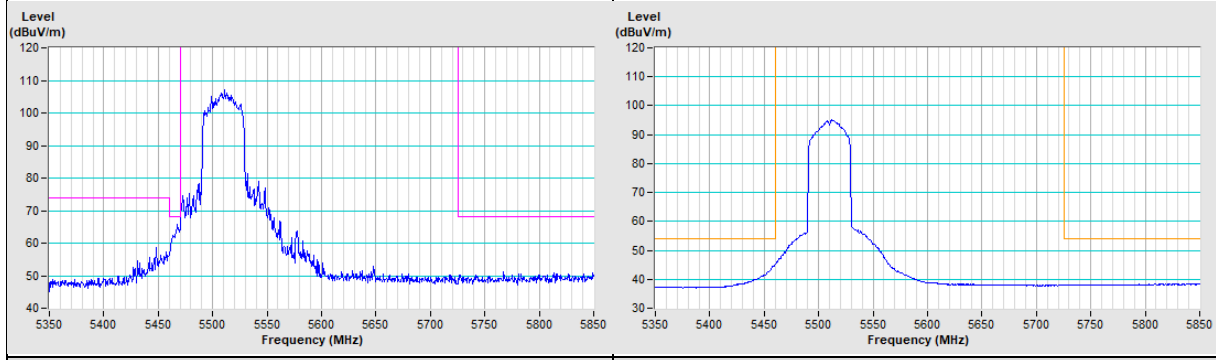


Vertical (Peak) **Vertical (Average)**

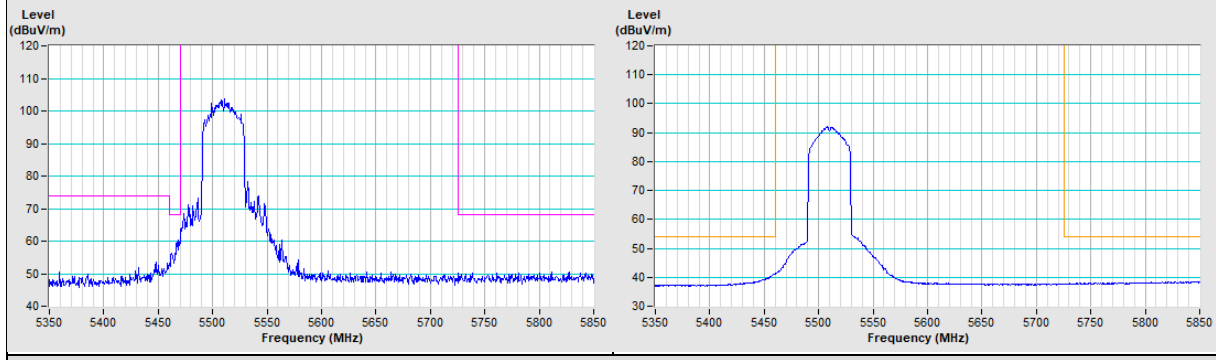


802.11ax (HE40) Channel 151

Horizontal (Peak) **Vertical (Peak)**

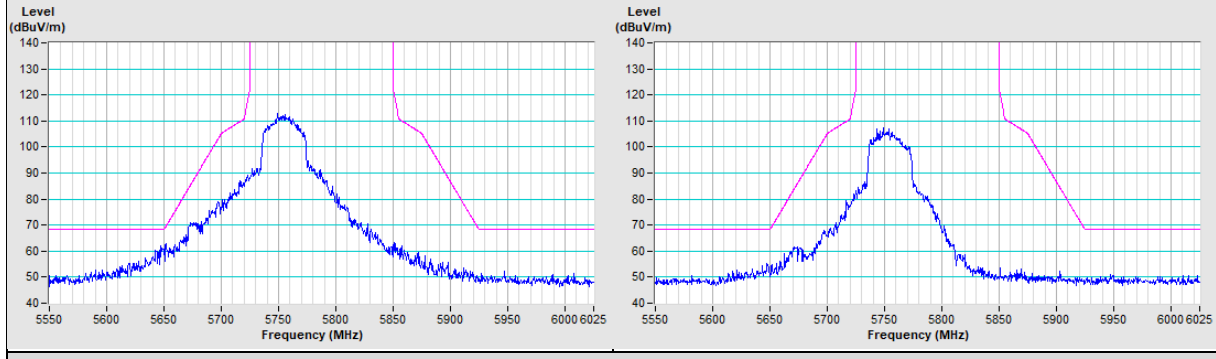


802.11ax (HE40) Channel 159

Horizontal (Peak) **Vertical (Peak)**

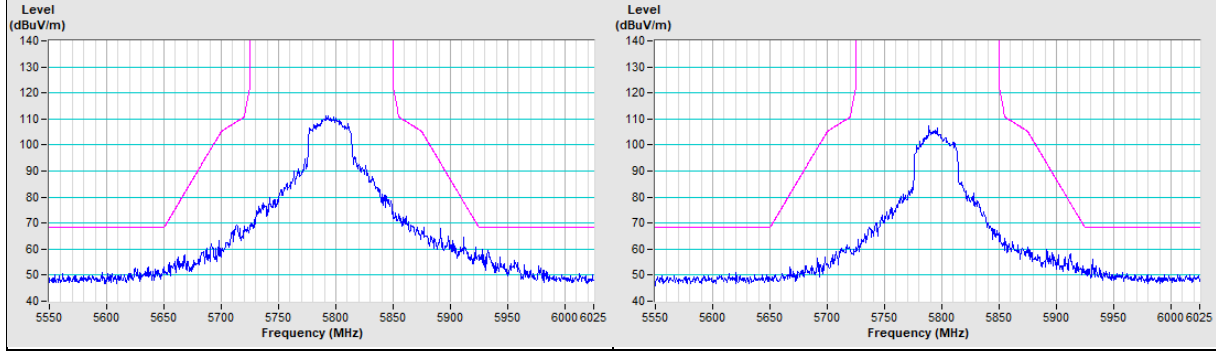


802.11ax (HE80) Channel 42

Horizontal (Peak)	Horizontal (Average)
--------------------------	-----------------------------

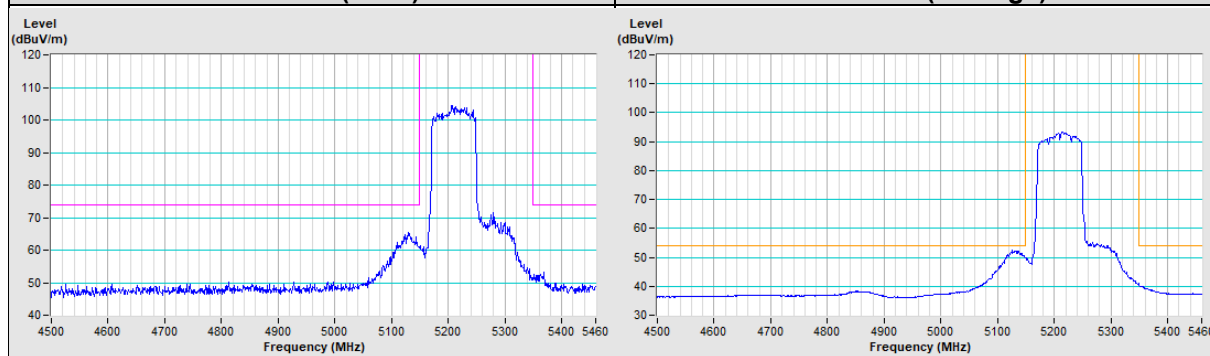


Vertical (Peak)	Vertical (Average)
------------------------	---------------------------

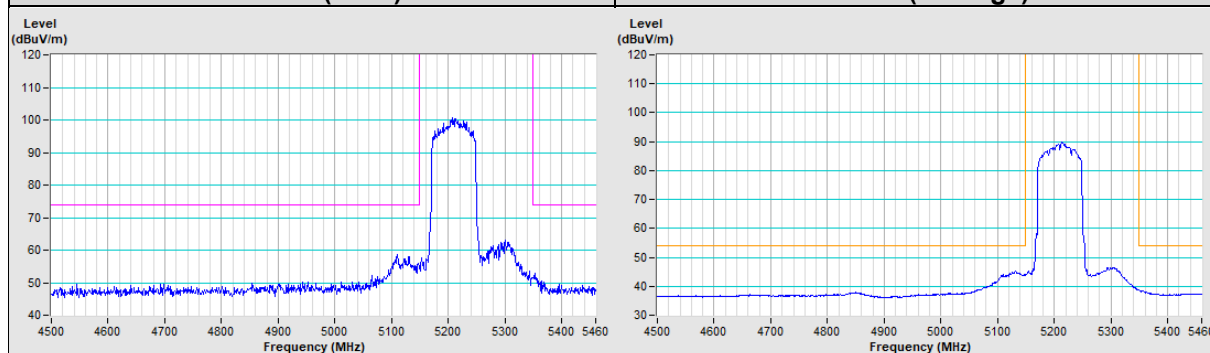


802.11ax (HE80) Channel 58

Horizontal (Peak)	Horizontal (Average)
--------------------------	-----------------------------

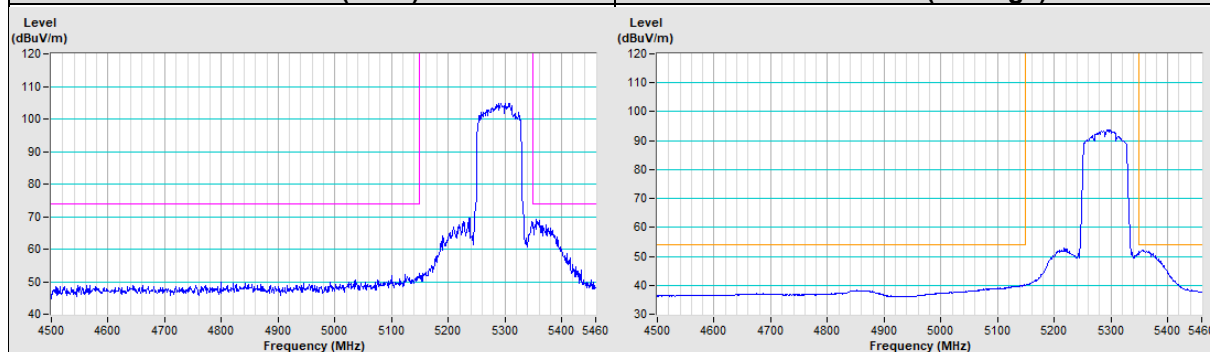


Vertical (Peak)	Vertical (Average)
------------------------	---------------------------

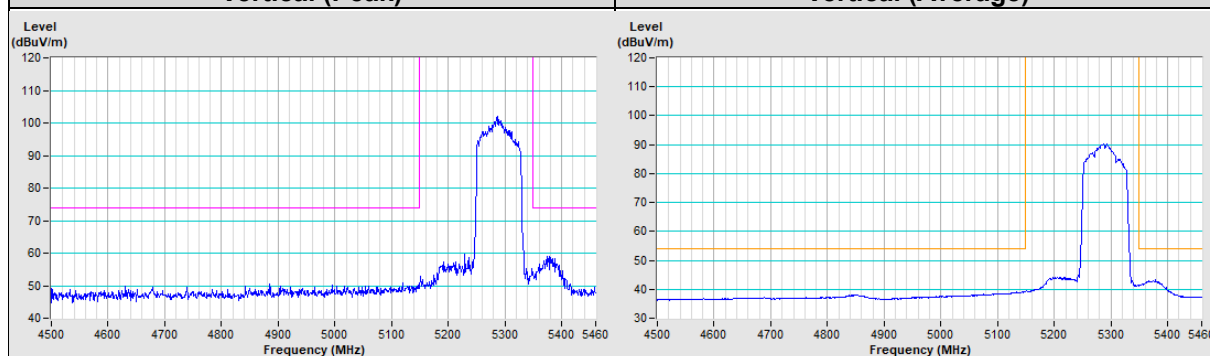


802.11ax (HE80) Channel 106


Horizontal (Peak)

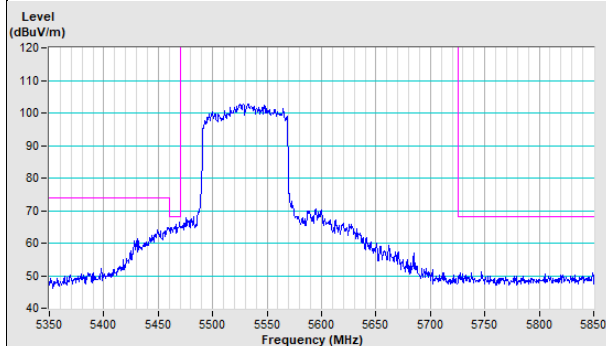


Horizontal (Average)

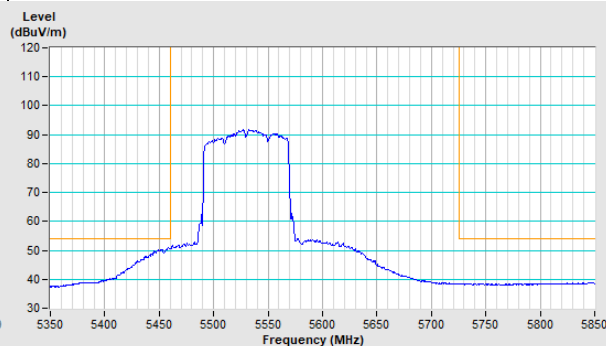

Vertical (Peak)

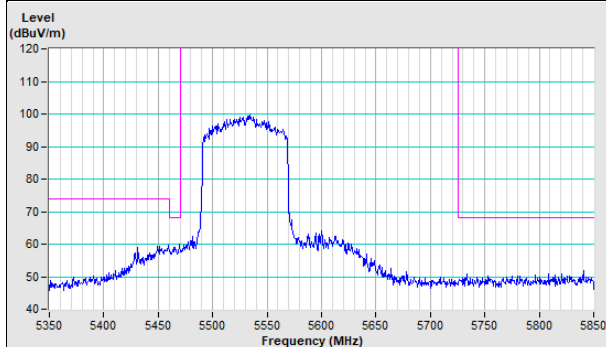


Vertical (Average)

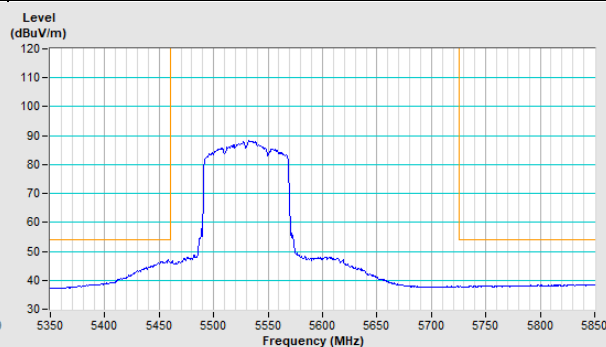


802.11ax (HE80) Channel 155



Horizontal (Peak)

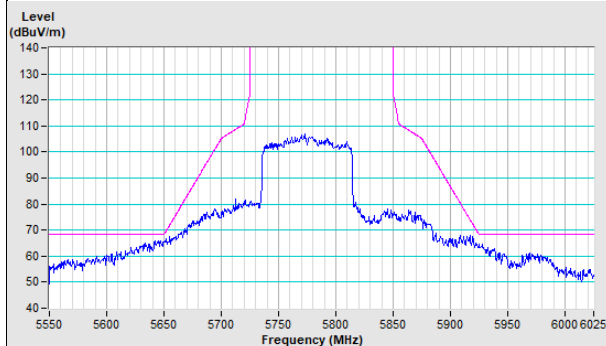



Vertical (Peak)

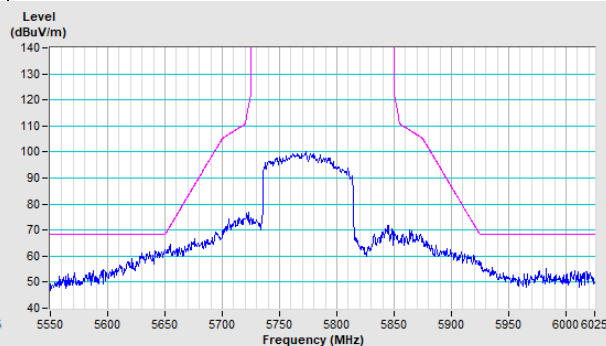



20 MHz Preamble 802.11ax (RU26) Channel 36

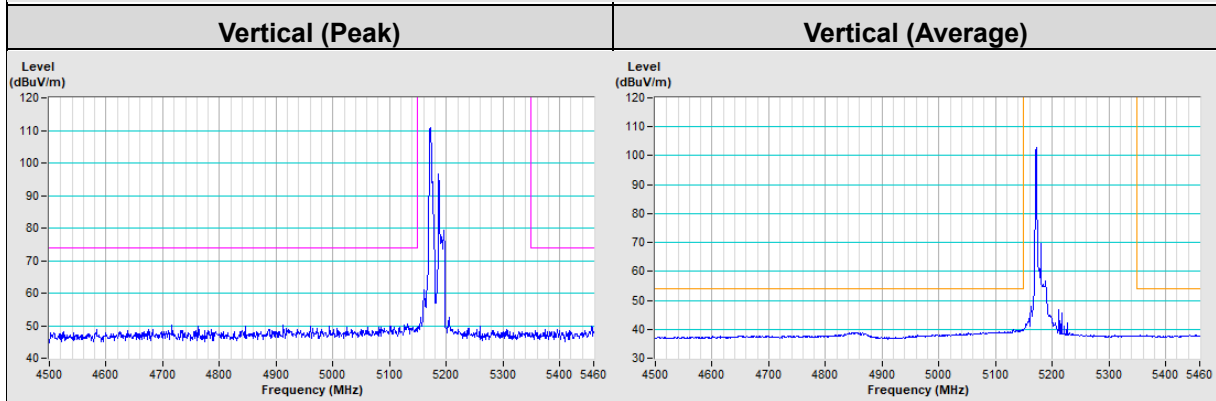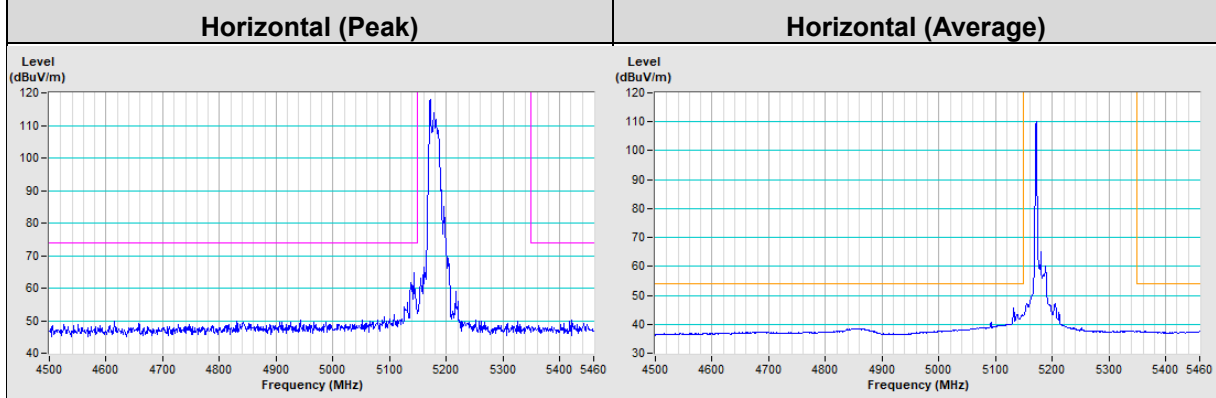


20 MHz Preamble 802.11ax (RU26) Channel 64

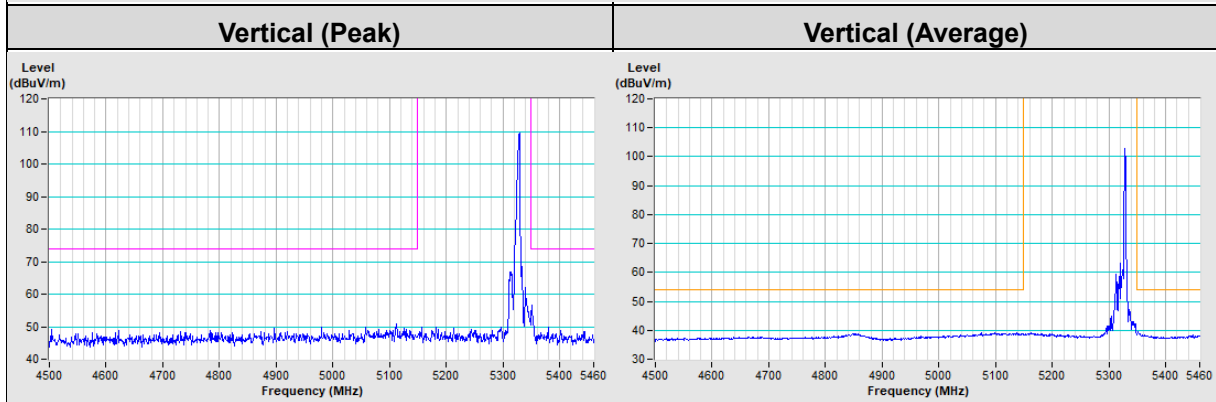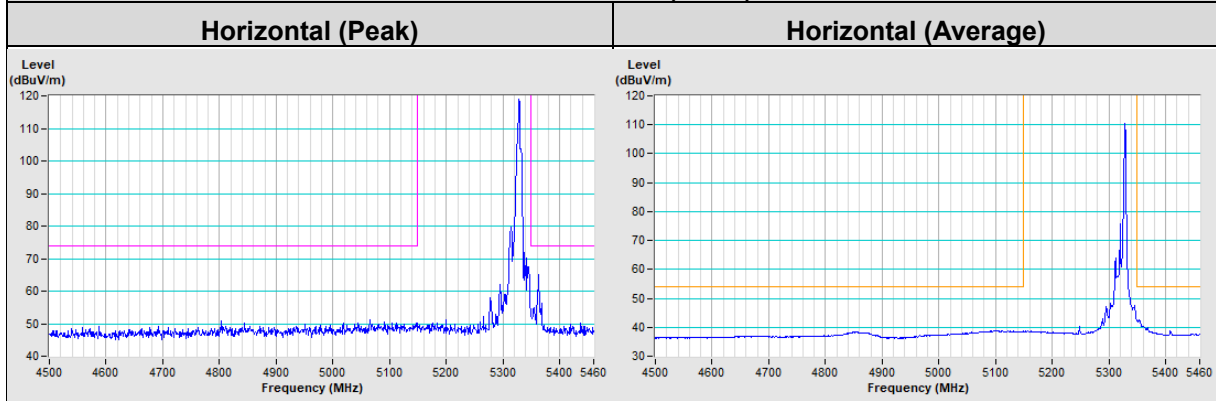


20 MHz Preamble 802.11ax (RU26) Channel 100

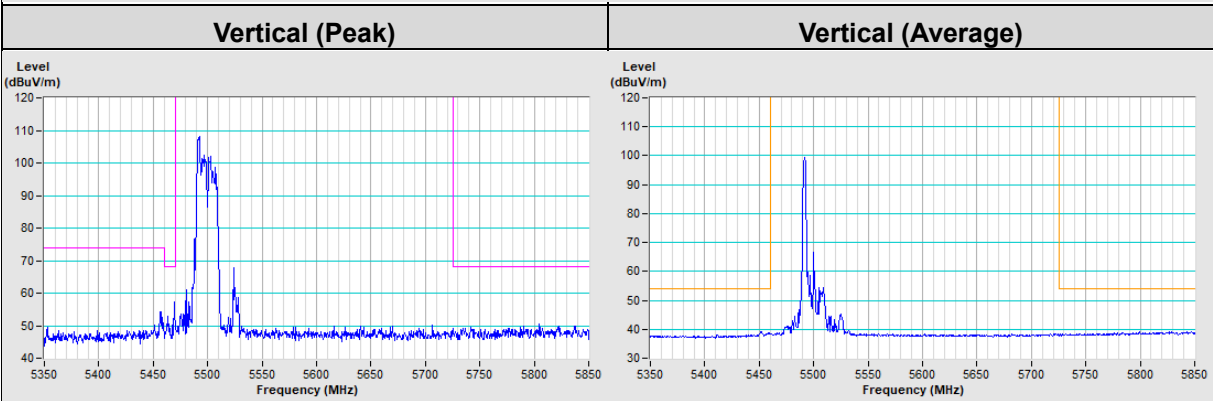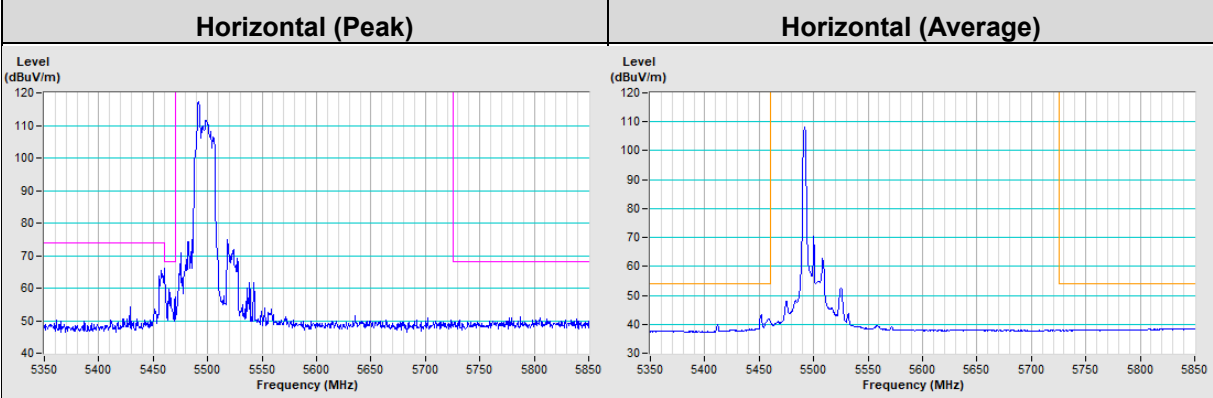


20 MHz Preamble 802.11ax (RU26) Channel 149

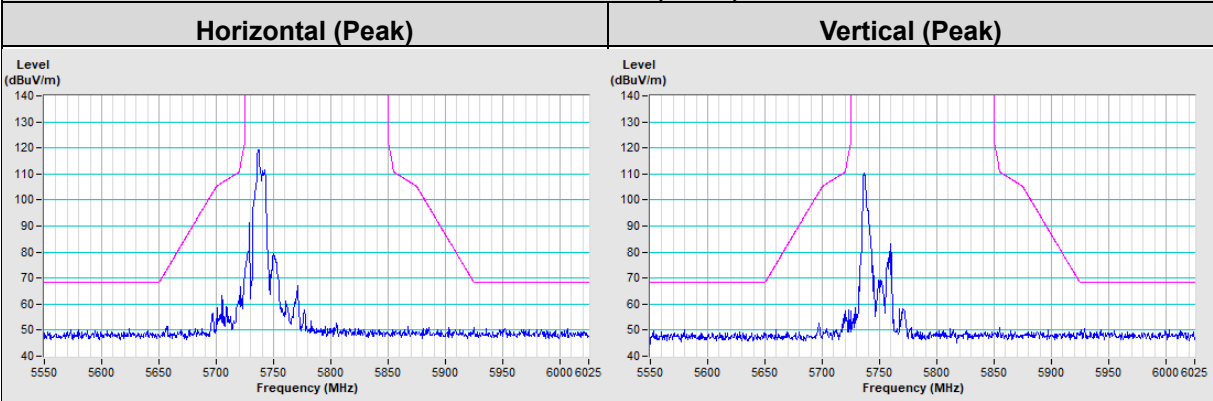


20 MHz Preamble 802.11ax (RU26) Channel 157

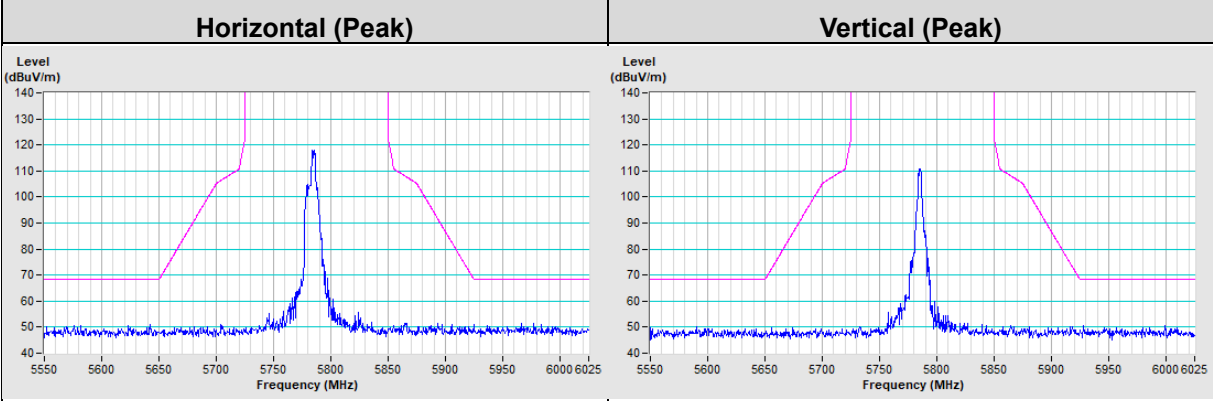

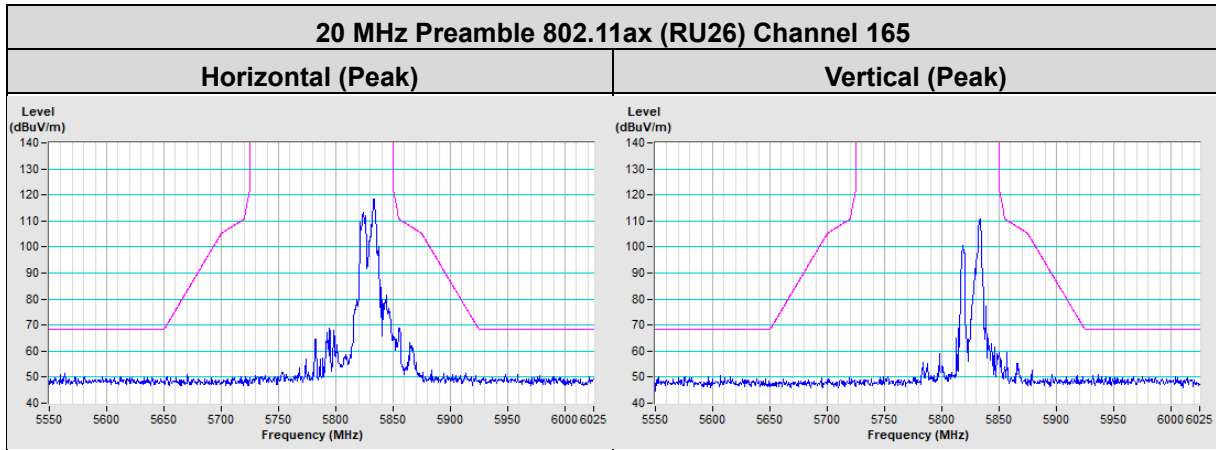


20 MHz Preamble 802.11ax (RU52) Channel 36


Horizontal (Peak)

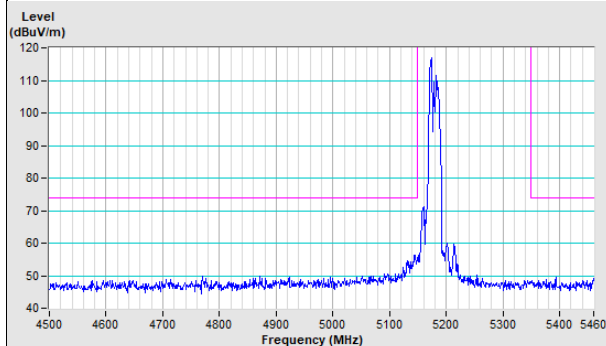


Horizontal (Average)

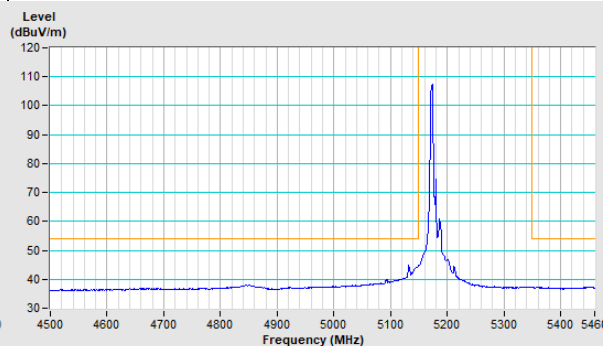

Vertical (Peak)

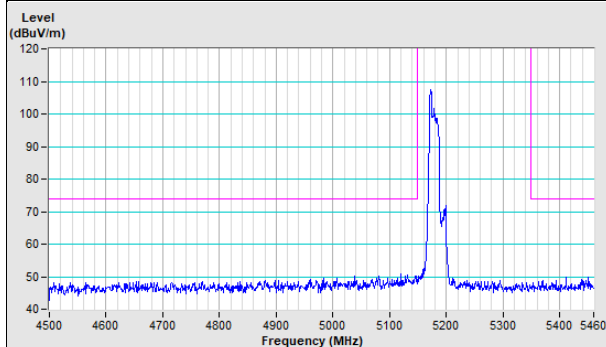


Vertical (Average)

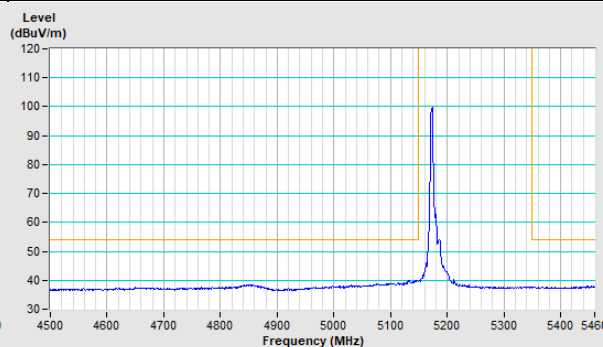


20 MHz Preamble 802.11ax (RU52) Channel 64


Horizontal (Peak)

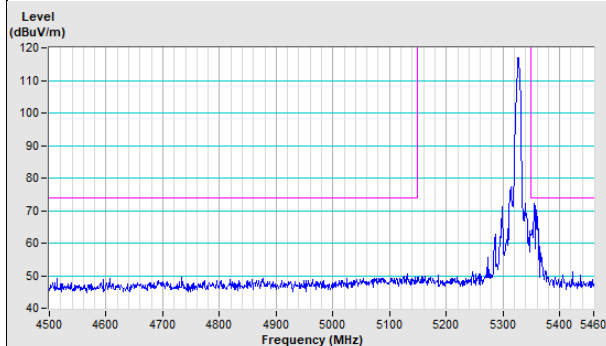


Horizontal (Average)

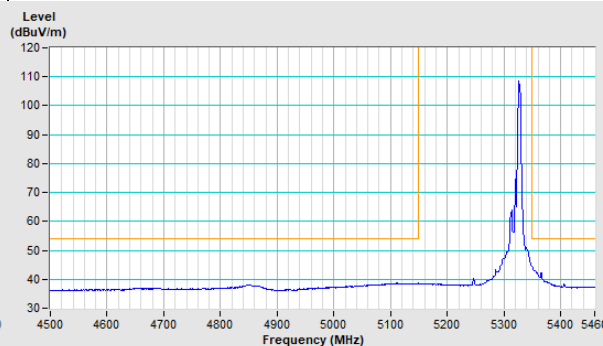

Vertical (Peak)

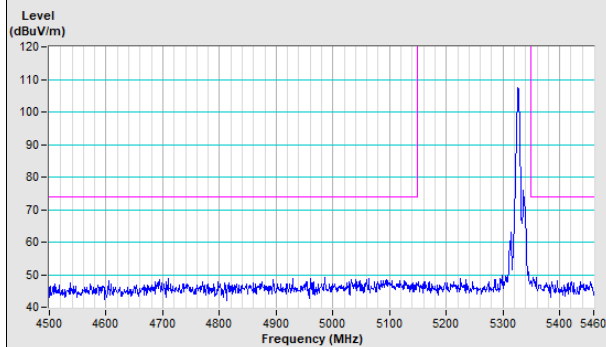


Vertical (Average)

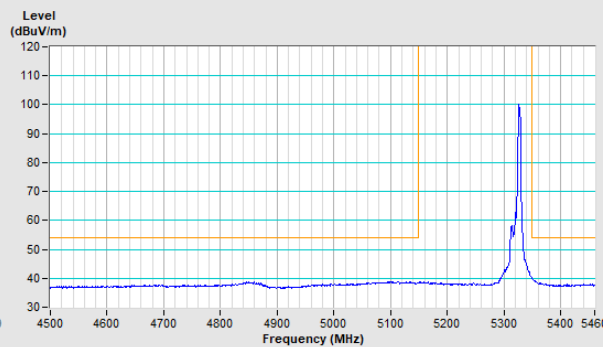


20 MHz Preamble 802.11ax (RU52) Channel 100

Horizontal (Peak) **Horizontal (Average)**

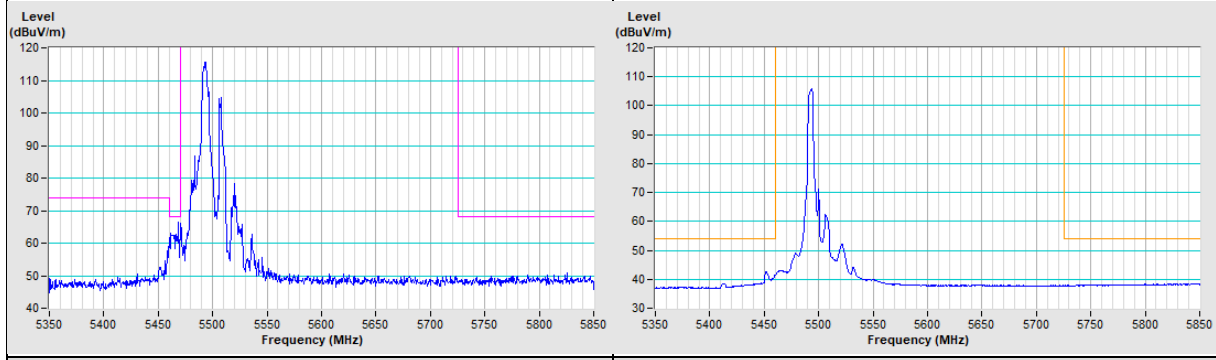


Vertical (Peak) **Vertical (Average)**

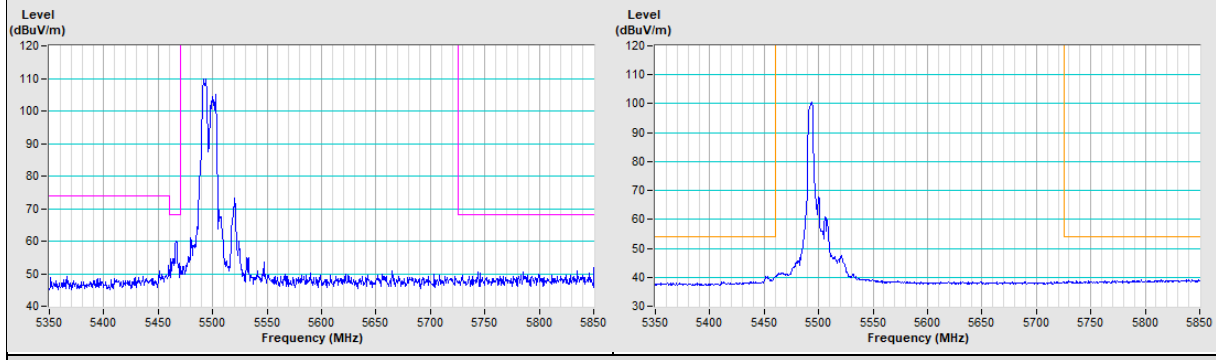


20 MHz Preamble 802.11ax (RU52) Channel 149


Horizontal (Peak) **Vertical (Peak)**

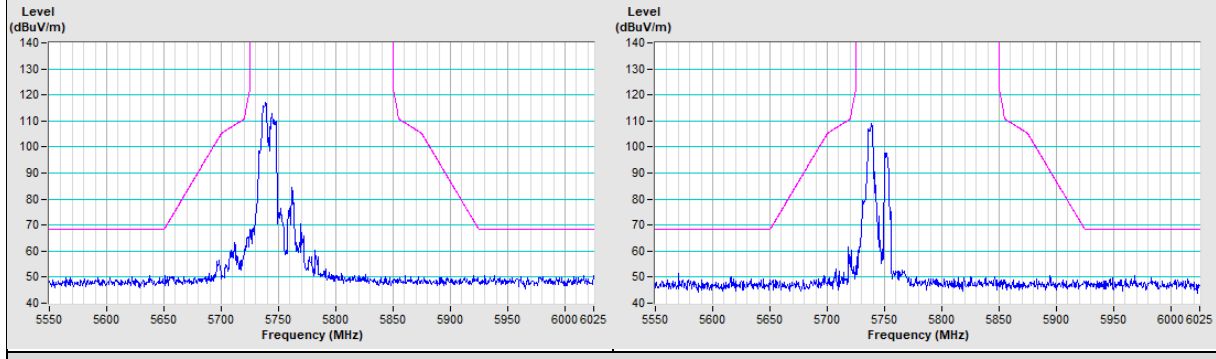



20 MHz Preamble 802.11ax (RU52) Channel 157

Horizontal (Peak) **Vertical (Peak)**


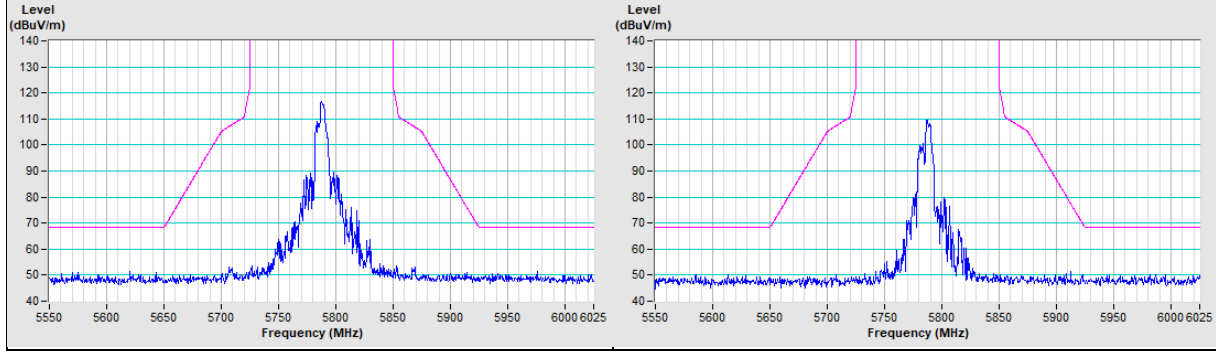


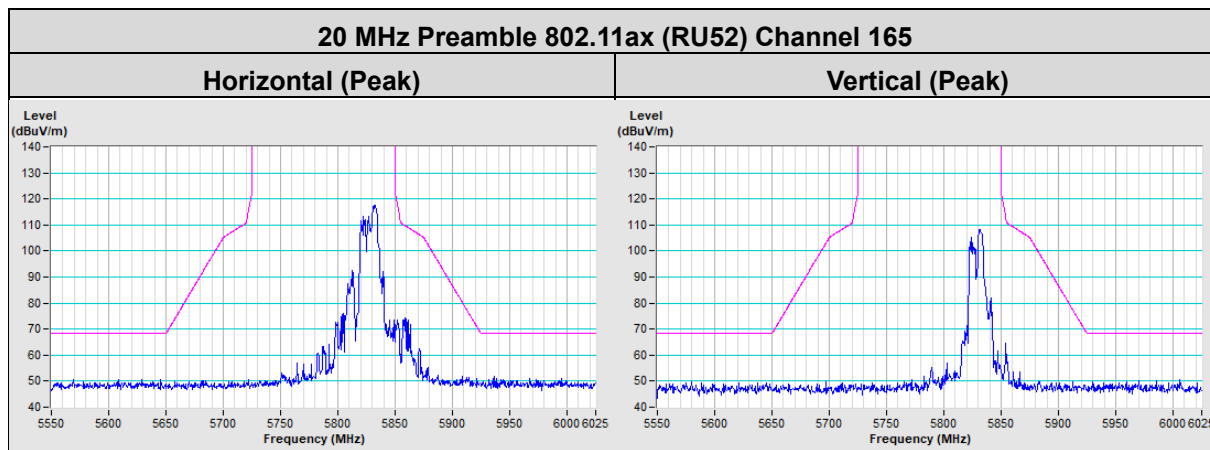



20 MHz Preamble 802.11ax (RU106) Channel 36

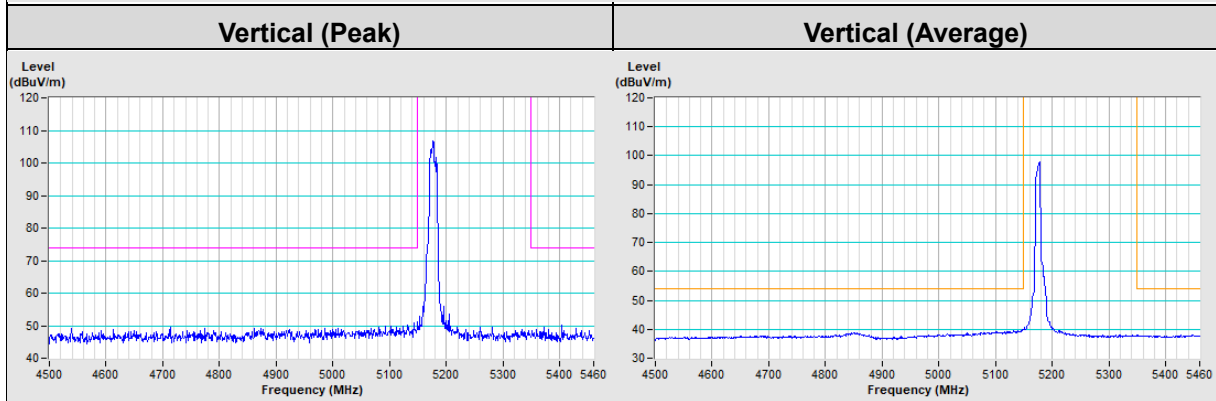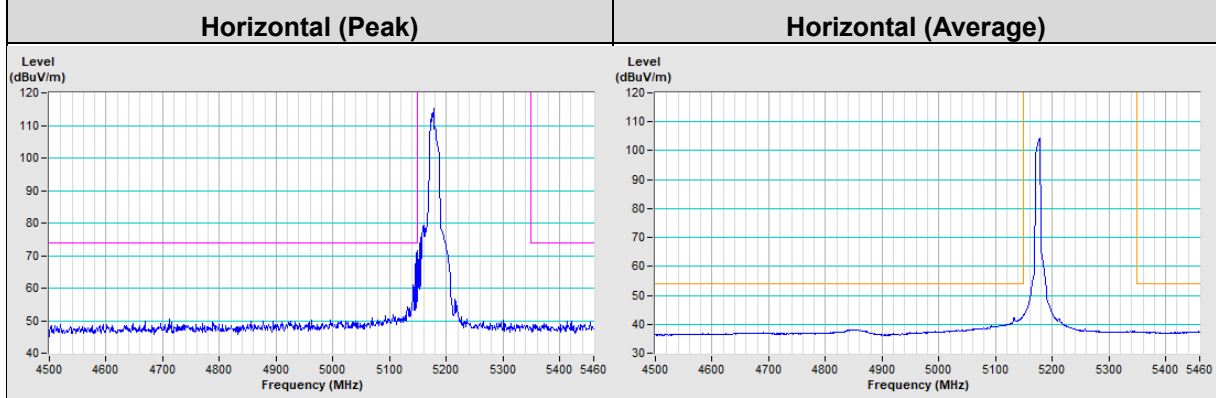


20 MHz Preamble 802.11ax (RU106) Channel 64

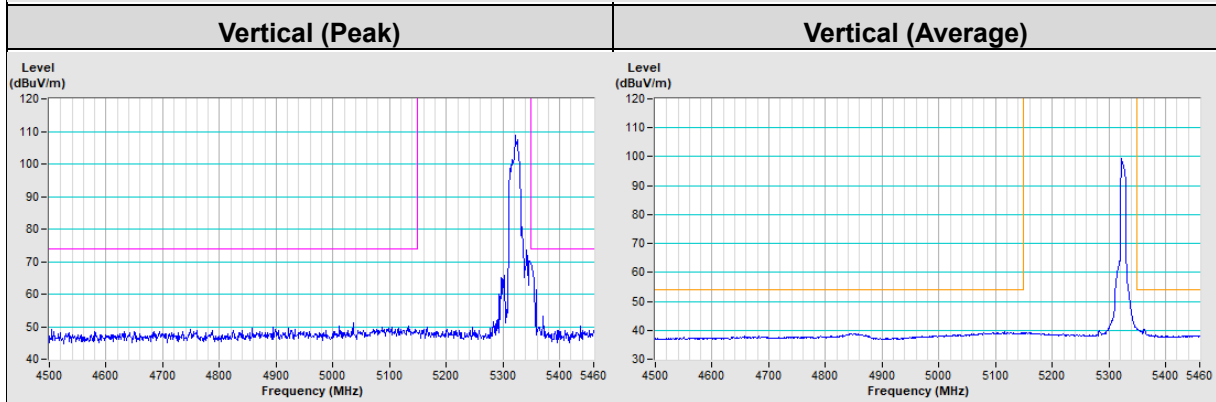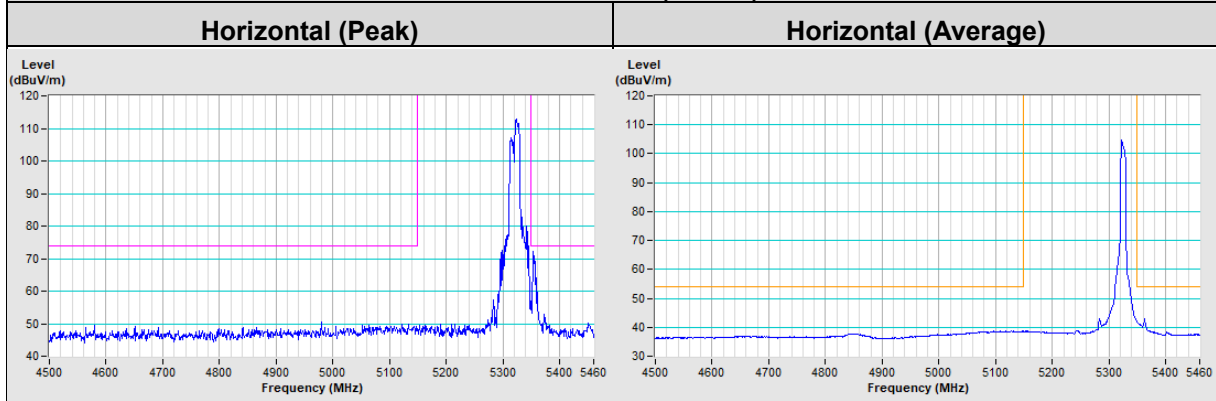


20 MHz Preamble 802.11ax (RU106) Channel 100

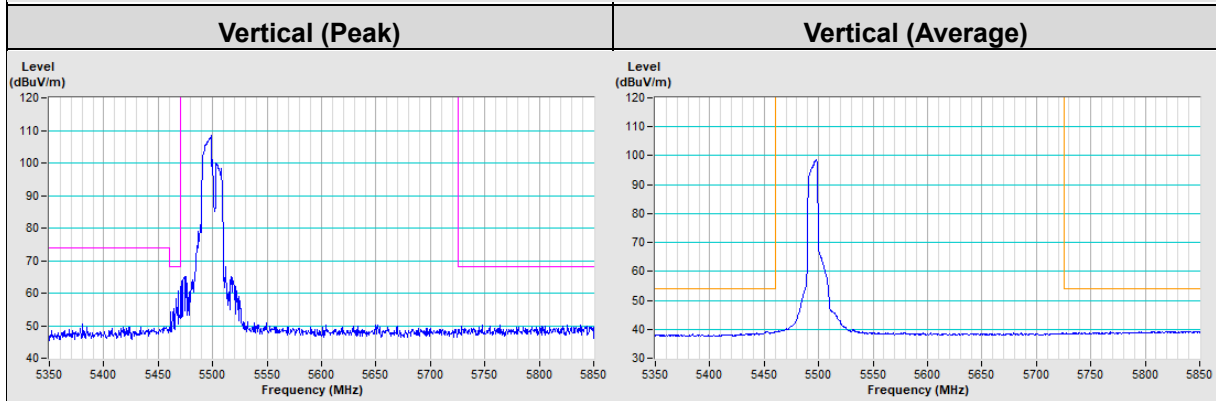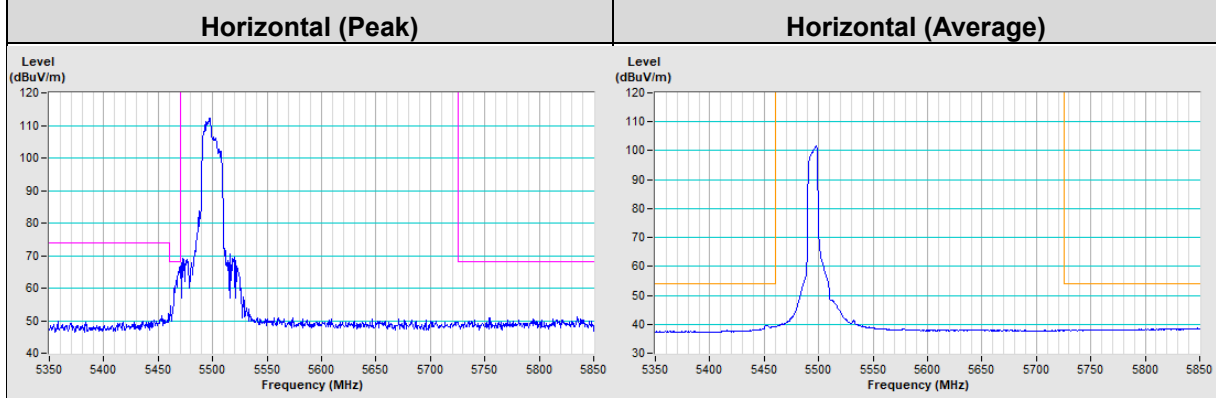


20 MHz Preamble 802.11ax (RU106) Channel 149

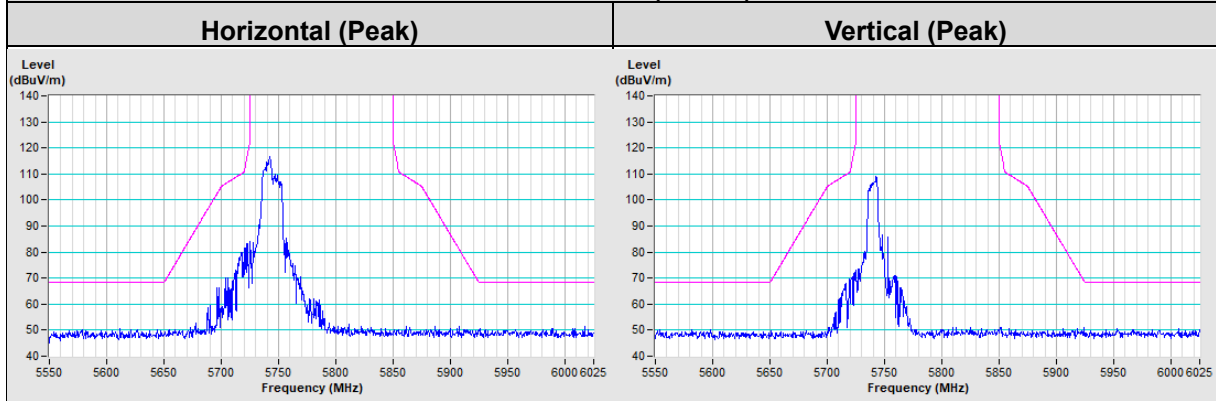

20 MHz Preamble 802.11ax (RU106) Channel 157

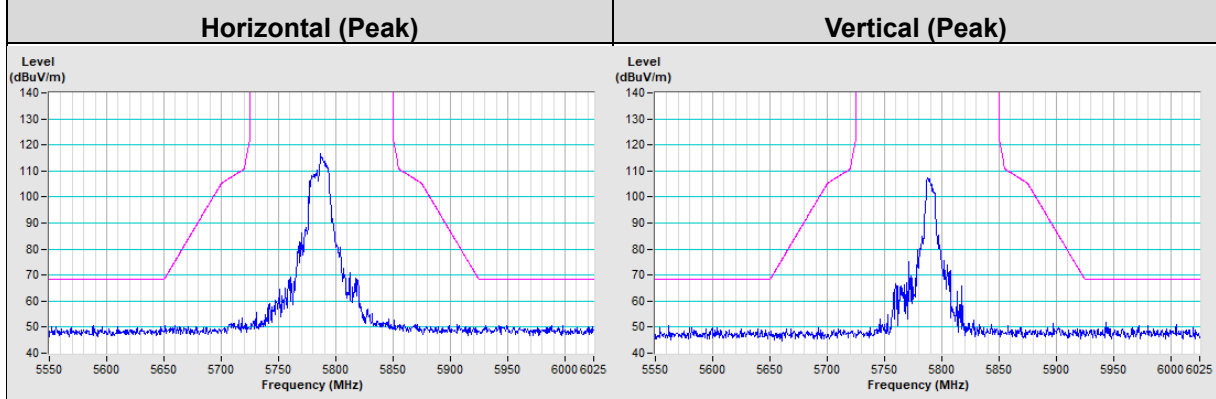

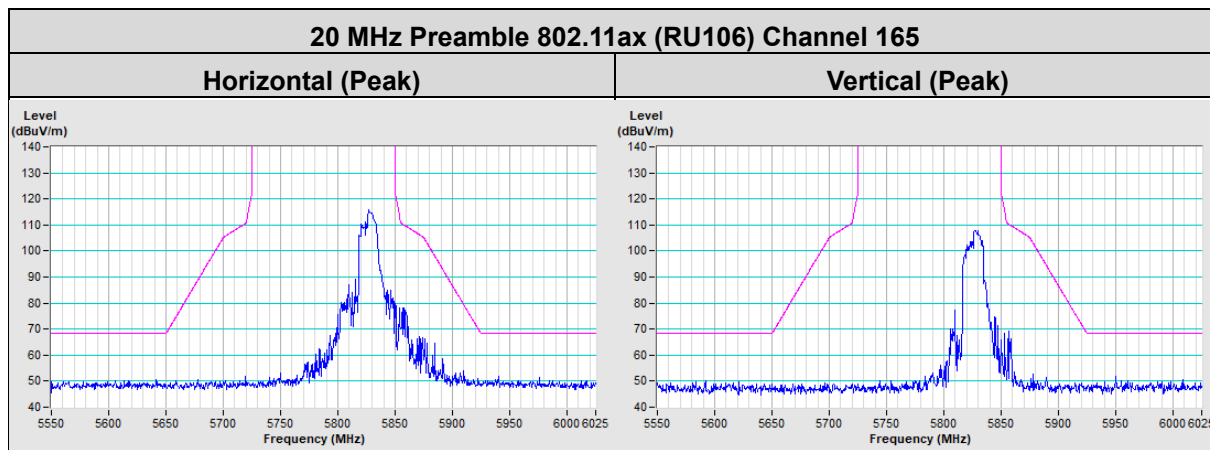


Mode C

RF Mode	TX 802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	5150.00	58.5 PK	74.0	-15.5	1.26 H	181	56.1	2.4
2	5150.00	43.5 AV	54.0	-10.5	1.26 H	181	41.1	2.4
3	*5180.00	106.3 PK			1.26 H	181	104.1	2.2
4	*5180.00	97.3 AV			1.26 H	181	95.1	2.2
5	#10360.00	47.4 PK	68.2	-20.8	1.46 H	296	35.7	11.7
6	15540.00	50.6 PK	74.0	-23.4	1.30 H	338	38.8	11.8
7	15540.00	38.5 AV	54.0	-15.5	1.30 H	338	26.7	11.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

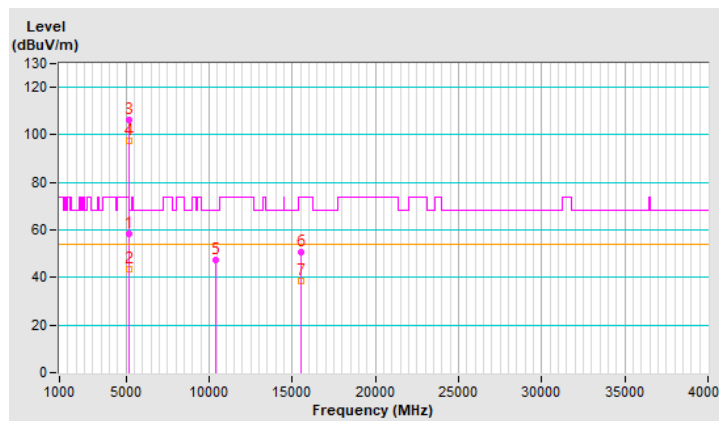


RF Mode	TX 802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.3 PK	74.0	-4.7	1.50 V	268	66.9	2.4
2	5150.00	52.3 AV	54.0	-1.7	1.50 V	268	49.9	2.4
3	*5180.00	118.3 PK			1.50 V	268	116.1	2.2
4	*5180.00	108.2 AV			1.50 V	268	106.0	2.2
5	#10360.00	54.9 PK	68.2	-13.3	2.45 V	176	43.2	11.7
6	15540.00	52.8 PK	74.0	-21.2	1.22 V	326	41.0	11.8
7	15540.00	39.8 AV	54.0	-14.2	1.22 V	326	28.0	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

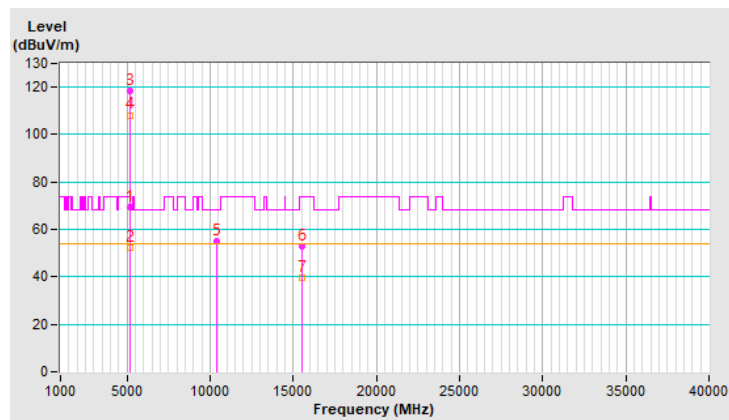


RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.7 PK	74.0	-21.3	1.31 H	175	50.3	2.4
2	5150.00	40.4 AV	54.0	-13.6	1.31 H	175	38.0	2.4
3	*5200.00	108.2 PK			1.31 H	175	106.1	2.1
4	*5200.00	99.0 AV			1.31 H	175	96.9	2.1
5	#10400.00	49.4 PK	68.2	-18.8	1.51 H	310	37.5	11.9
6	15600.00	51.3 PK	74.0	-22.7	1.30 H	349	39.8	11.5
7	15600.00	40.3 AV	54.0	-13.7	1.30 H	349	28.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

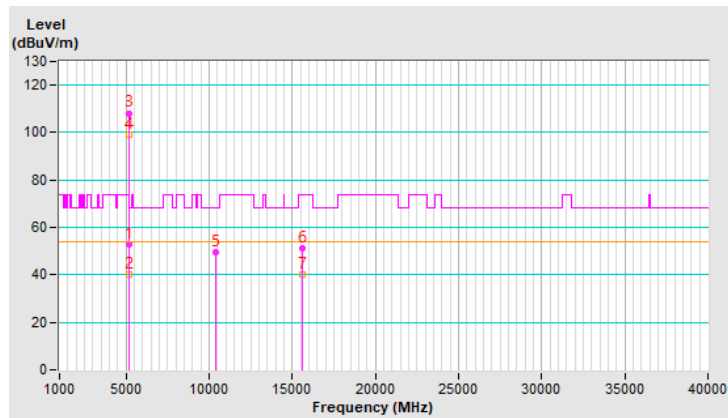


RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.0 PK	74.0	-10.0	1.48 V	286	61.6	2.4
2	5150.00	46.5 AV	54.0	-7.5	1.48 V	286	44.1	2.4
3	*5200.00	120.2 PK			1.48 V	286	118.1	2.1
4	*5200.00	110.3 AV			1.48 V	286	108.2	2.1
5	#10400.00	57.7 PK	68.2	-10.5	2.47 V	165	45.8	11.9
6	15600.00	53.2 PK	74.0	-20.8	1.28 V	304	41.7	11.5
7	15600.00	41.6 AV	54.0	-12.4	1.28 V	304	30.1	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

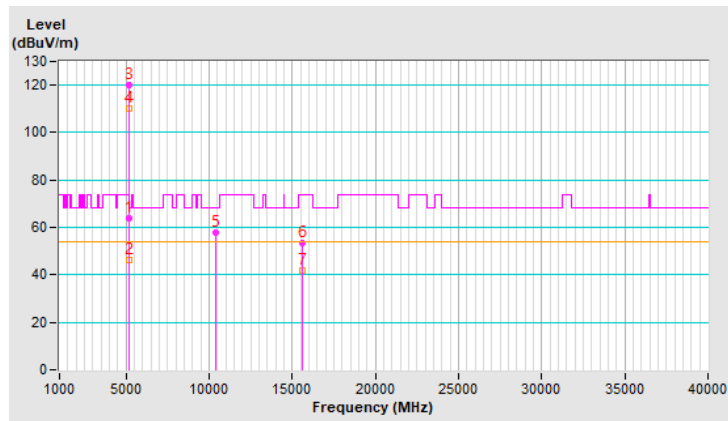


RF Mode	TX 802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	108.3 PK			1.29 H	163	106.4	1.9
2	*5240.00	99.1 AV			1.29 H	163	97.2	1.9
3	5350.00	52.3 PK	74.0	-21.7	1.29 H	163	50.3	2.0
4	5350.00	39.7 AV	54.0	-14.3	1.29 H	163	37.7	2.0
5	#10480.00	49.6 PK	68.2	-18.6	1.46 H	305	37.7	11.9
6	15720.00	50.8 PK	74.0	-23.2	1.26 H	360	39.1	11.7
7	15720.00	39.9 AV	54.0	-14.1	1.26 H	360	28.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

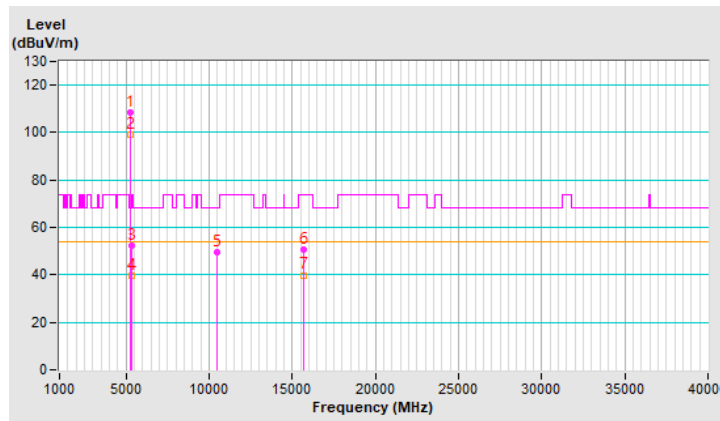




RF Mode	TX 802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	119.9 PK			1.56 V	261	118.0	1.9
2	*5240.00	110.1 AV			1.56 V	261	108.2	1.9
3	5350.00	50.8 PK	74.0	-23.2	1.56 V	261	48.8	2.0
4	5350.00	39.0 AV	54.0	-15.0	1.56 V	261	37.0	2.0
5	#10480.00	57.1 PK	68.2	-11.1	2.44 V	172	45.2	11.9
6	15720.00	53.2 PK	74.0	-20.8	1.22 V	314	41.5	11.7
7	15720.00	41.5 AV	54.0	-12.5	1.22 V	314	29.8	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

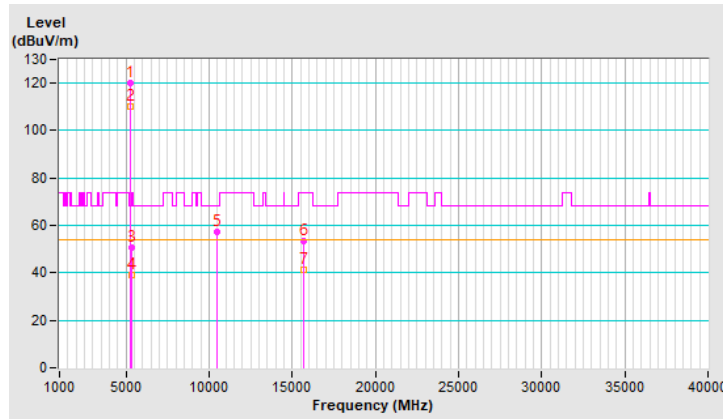


RF Mode	TX 802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.5 PK	74.0	-21.5	1.26 H	149	50.1	2.4
2	5150.00	39.8 AV	54.0	-14.2	1.26 H	149	37.4	2.4
3	*5260.00	108.3 PK			1.26 H	149	106.5	1.8
4	*5260.00	99.2 AV			1.26 H	149	97.4	1.8
5	#10520.00	49.7 PK	68.2	-18.5	1.44 H	318	37.7	12.0
6	15780.00	56.1 PK	74.0	-17.9	1.33 H	360	44.6	11.5
7	15780.00	44.9 AV	54.0	-9.1	1.33 H	360	33.4	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

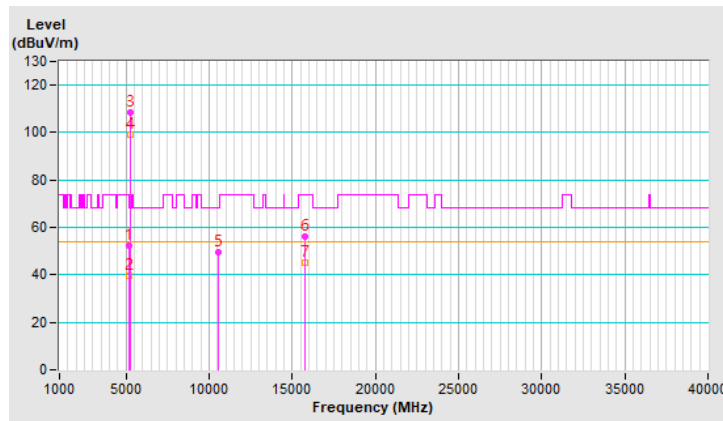


RF Mode	TX 802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.4 PK	74.0	-22.6	1.40 V	280	49.0	2.4
2	5150.00	40.2 AV	54.0	-13.8	1.40 V	280	37.8	2.4
3	*5260.00	120.5 PK			1.40 V	280	118.7	1.8
4	*5260.00	110.6 AV			1.40 V	280	108.8	1.8
5	#10520.00	55.3 PK	68.2	-12.9	1.68 V	173	43.3	12.0
6	15780.00	63.5 PK	74.0	-10.5	1.98 V	261	52.0	11.5
7	15780.00	49.8 AV	54.0	-4.2	1.98 V	261	38.3	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

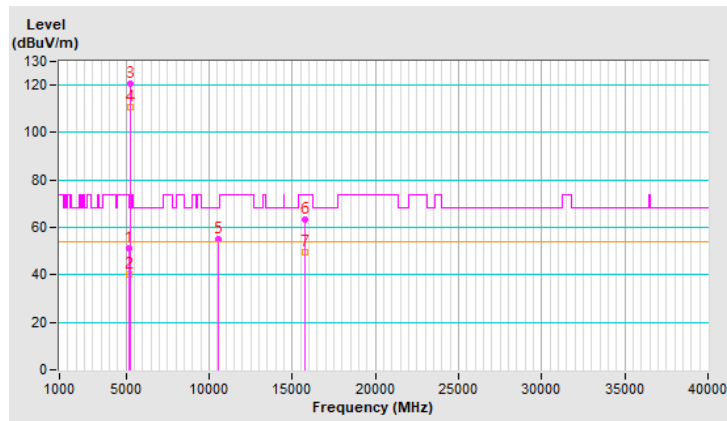


RF Mode	TX 802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	108.0 PK			1.20 H	161	106.3	1.7
2	*5300.00	98.9 AV			1.20 H	161	97.2	1.7
3	5350.00	57.7 PK	74.0	-16.3	1.20 H	161	55.7	2.0
4	5350.00	43.1 AV	54.0	-10.9	1.20 H	161	41.1	2.0
5	10600.00	49.8 PK	74.0	-24.2	1.42 H	311	38.1	11.7
6	10600.00	37.2 AV	54.0	-16.8	1.42 H	311	25.5	11.7
7	15900.00	55.7 PK	74.0	-18.3	1.28 H	360	44.6	11.1
8	15900.00	44.5 AV	54.0	-9.5	1.28 H	360	33.4	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

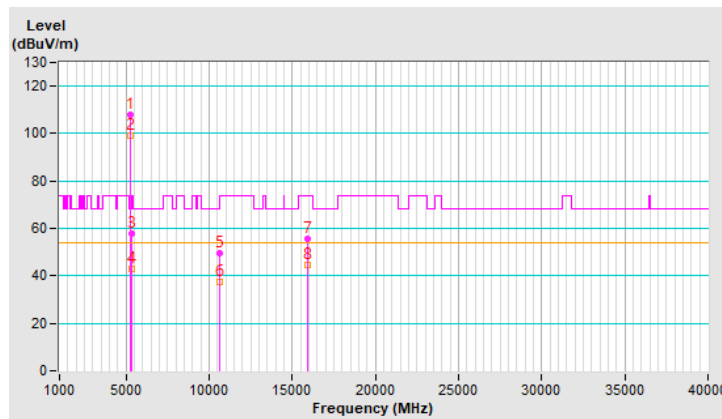


RF Mode	TX 802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	120.1 PK			1.60 V	293	118.4	1.7
2	*5300.00	110.4 AV			1.60 V	293	108.7	1.7
3	5350.00	68.8 PK	74.0	-5.2	1.60 V	293	66.8	2.0
4	5350.00	46.7 AV	54.0	-7.3	1.60 V	293	44.7	2.0
5	10600.00	54.9 PK	74.0	-19.1	1.72 V	167	43.2	11.7
6	10600.00	40.5 AV	54.0	-13.5	1.72 V	167	28.8	11.7
7	15900.00	63.2 PK	74.0	-10.8	2.01 V	254	52.1	11.1
8	15900.00	49.4 AV	54.0	-4.6	2.01 V	254	38.3	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

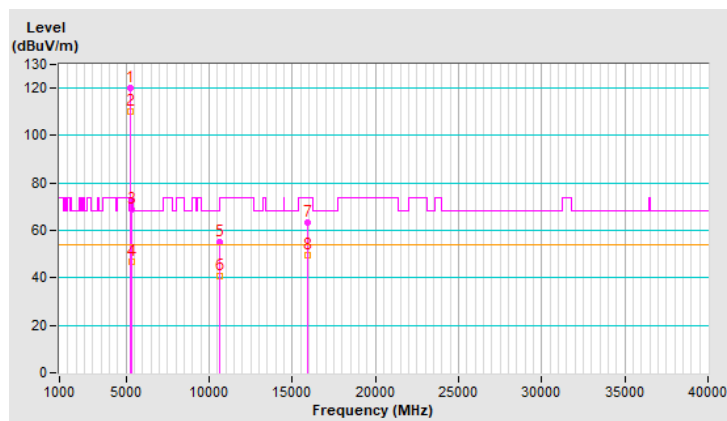


RF Mode	TX 802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	106.5 PK			1.33 H	147	104.8	1.7
2	*5320.00	97.1 AV			1.33 H	147	95.4	1.7
3	5350.00	57.5 PK	74.0	-16.5	1.33 H	147	55.5	2.0
4	5350.00	42.8 AV	54.0	-11.2	1.33 H	147	40.8	2.0
5	10640.00	46.1 PK	74.0	-27.9	1.46 H	311	34.5	11.6
6	10640.00	35.3 AV	54.0	-18.7	1.46 H	311	23.7	11.6
7	15960.00	52.7 PK	74.0	-21.3	1.26 H	360	41.3	11.4
8	15960.00	41.3 AV	54.0	-12.7	1.26 H	360	29.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

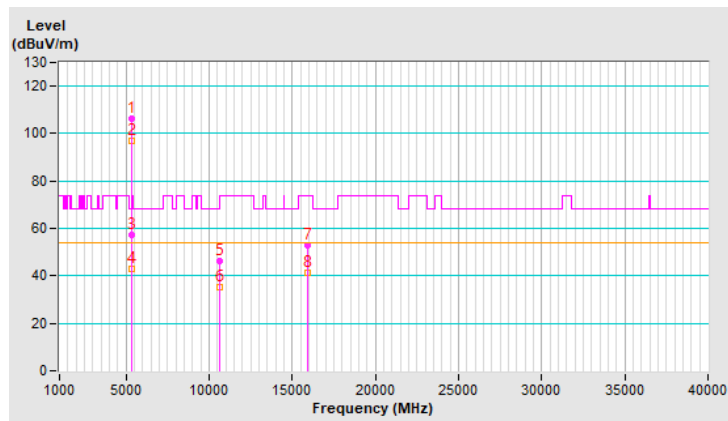




RF Mode	TX 802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.5 PK			1.31 V	284	116.8	1.7
2	*5320.00	108.5 AV			1.31 V	284	106.8	1.7
3	5350.00	70.8 PK	74.0	-3.2	1.31 V	284	68.8	2.0
4	5350.00	52.5 AV	54.0	-1.5	1.31 V	284	50.5	2.0
5	10640.00	50.6 PK	74.0	-23.4	1.72 V	153	39.0	11.6
6	10640.00	37.4 AV	54.0	-16.6	1.72 V	153	25.8	11.6
7	15960.00	59.8 PK	74.0	-14.2	1.98 V	263	48.4	11.4
8	15960.00	46.0 AV	54.0	-8.0	1.98 V	263	34.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

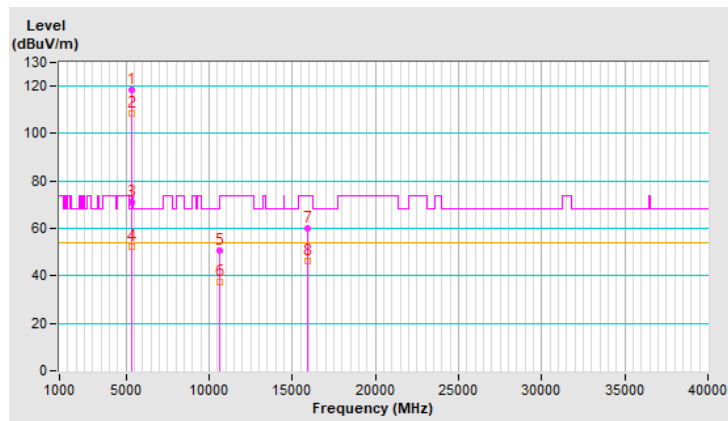


RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.4 PK	74.0	-21.6	2.99 H	113	50.2	2.2
2	5460.00	38.7 AV	54.0	-15.3	2.99 H	113	36.5	2.2
3	#5466.70	57.4 PK	68.2	-10.8	2.99 H	113	55.2	2.2
4	*5500.00	105.3 PK			2.99 H	113	103.2	2.1
5	*5500.00	96.4 AV			2.99 H	113	94.3	2.1
6	11000.00	46.2 PK	74.0	-27.8	1.49 H	306	34.1	12.1
7	11000.00	36.3 AV	54.0	-17.7	1.49 H	306	24.2	12.1
8	#16500.00	51.4 PK	68.2	-16.8	1.30 H	360	38.0	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

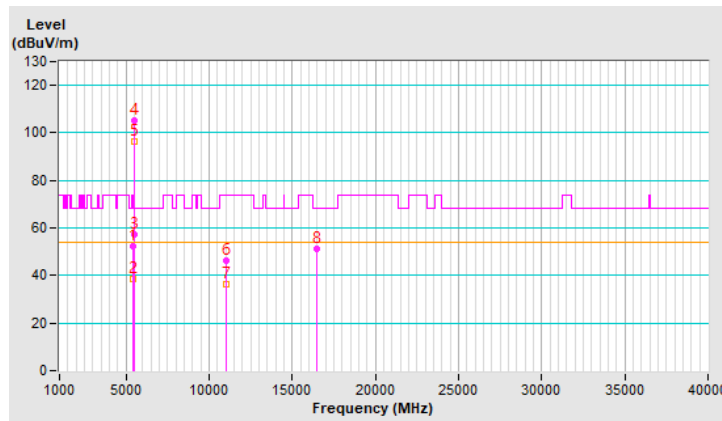


RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.9 PK	74.0	-15.1	1.51 V	275	56.7	2.2
2	5460.00	44.4 AV	54.0	-9.6	1.51 V	275	42.2	2.2
3	#5467.00	66.4 PK	68.2	-1.8	1.51 V	275	64.2	2.2
4	*5500.00	116.6 PK			1.51 V	275	114.5	2.1
5	*5500.00	106.7 AV			1.51 V	275	104.6	2.1
6	11000.00	49.5 PK	74.0	-24.5	2.07 V	297	37.4	12.1
7	11000.00	35.8 AV	54.0	-18.2	2.07 V	297	23.7	12.1
8	#16500.00	51.8 PK	68.2	-16.4	1.97 V	261	38.4	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

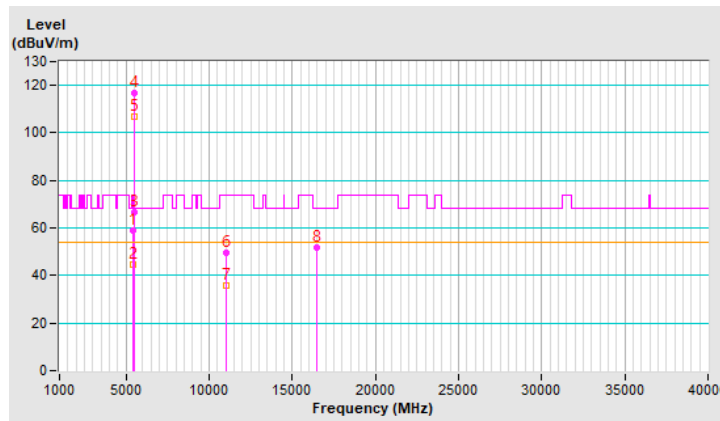


RF Mode	TX 802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	108.6 PK			3.05 H	99	106.4	2.2
2	*5580.00	99.7 AV			3.05 H	99	97.5	2.2
3	11160.00	46.4 PK	74.0	-27.6	1.51 H	307	34.5	11.9
4	11160.00	36.5 AV	54.0	-17.5	1.51 H	307	24.6	11.9
5	#16740.00	50.8 PK	68.2	-17.4	1.32 H	357	35.6	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

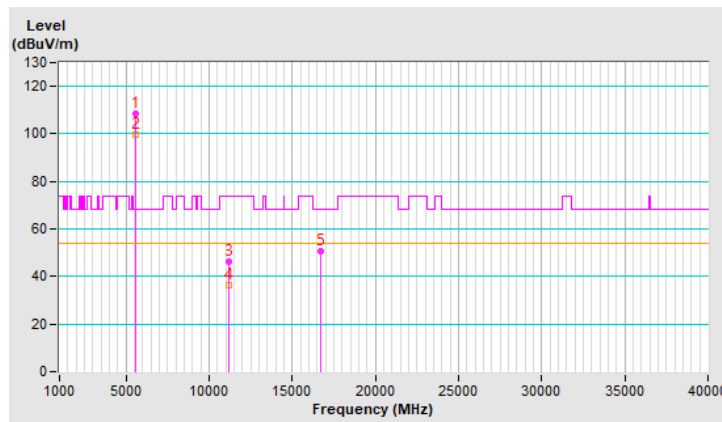


RF Mode	TX 802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	120.2 PK			1.70 V	270	118.0	2.2
2	*5580.00	110.5 AV			1.70 V	270	108.3	2.2
3	11160.00	53.9 PK	74.0	-20.1	2.11 V	289	42.0	11.9
4	11160.00	39.2 AV	54.0	-14.8	2.11 V	289	27.3	11.9
5	#16740.00	55.2 PK	68.2	-13.0	2.02 V	262	40.0	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

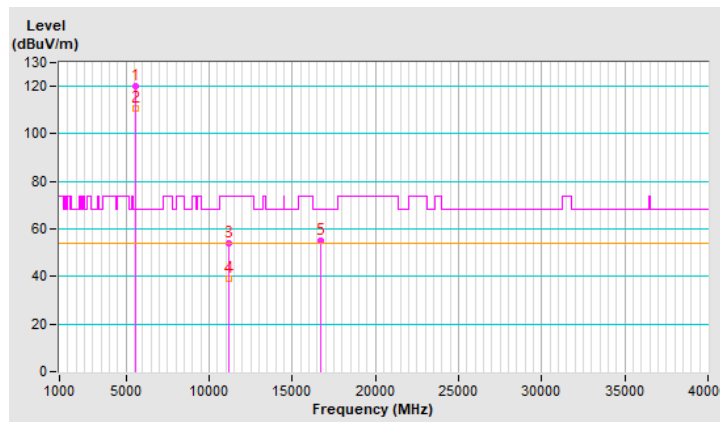


RF Mode	TX 802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	103.5 PK			2.99 H	118	101.2	2.3
2	*5700.00	94.5 AV			2.99 H	118	92.2	2.3
3	#5725.00	57.8 PK	68.2	-10.4	2.99 H	118	55.3	2.5
4	11400.00	46.0 PK	74.0	-28.0	1.54 H	322	33.8	12.2
5	11400.00	36.3 AV	54.0	-17.7	1.54 H	322	24.1	12.2
6	#17100.00	50.9 PK	68.2	-17.3	1.34 H	348	34.3	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

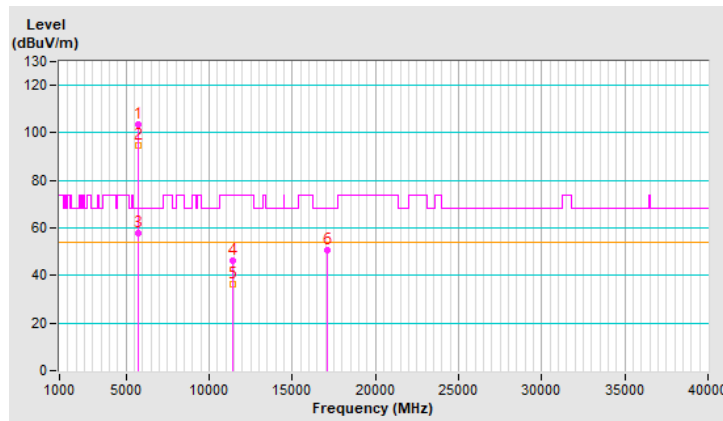


RF Mode	TX 802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.8 PK			1.49 V	271	111.5	2.3
2	*5700.00	105.0 AV			1.49 V	271	102.7	2.3
3	#5725.00	66.5 PK	68.2	-1.7	1.49 V	271	64.0	2.5
4	11400.00	49.3 PK	74.0	-24.7	2.04 V	308	37.1	12.2
5	11400.00	35.7 AV	54.0	-18.3	2.04 V	308	23.5	12.2
6	#17100.00	51.4 PK	68.2	-16.8	1.95 V	256	34.8	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

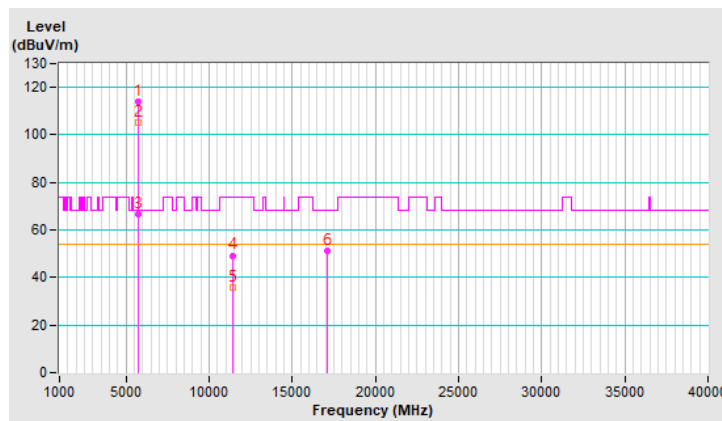


RF Mode	TX 802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.9 PK	74.0	-23.1	3.01 H	86	48.7	2.2
2	5460.00	38.8 AV	54.0	-15.2	3.01 H	86	36.6	2.2
3	#5470.00	52.2 PK	68.2	-16.0	3.01 H	86	50.0	2.2
4	*5720.00	108.0 PK			3.01 H	86	105.6	2.4
5	*5720.00	99.3 AV			3.01 H	86	96.9	2.4
6	#5850.00	51.7 PK	68.2	-16.5	3.01 H	86	48.8	2.9
7	11440.00	46.5 PK	74.0	-27.5	1.54 H	299	34.3	12.2
8	11440.00	36.5 AV	54.0	-17.5	1.54 H	299	24.3	12.2
9	#17160.00	50.7 PK	68.2	-17.5	1.36 H	360	34.2	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

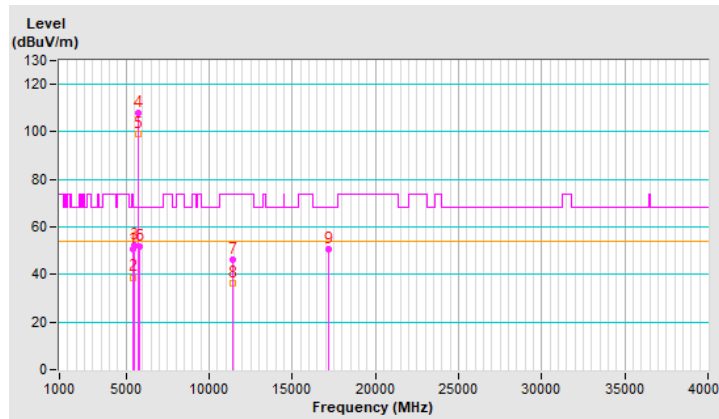


RF Mode	TX 802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.5 PK	74.0	-22.5	1.45 V	261	49.3	2.2
2	5460.00	39.2 AV	54.0	-14.8	1.45 V	261	37.0	2.2
3	#5470.00	51.9 PK	68.2	-16.3	1.45 V	261	49.7	2.2
4	*5720.00	120.2 PK			1.45 V	261	117.8	2.4
5	*5720.00	110.5 AV			1.45 V	261	108.1	2.4
6	#5850.00	51.6 PK	68.2	-16.6	1.45 V	261	48.7	2.9
7	11440.00	54.3 PK	74.0	-19.7	2.08 V	299	42.1	12.2
8	11440.00	39.6 AV	54.0	-14.4	2.08 V	299	27.4	12.2
9	#17160.00	55.3 PK	68.2	-12.9	2.07 V	251	38.8	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

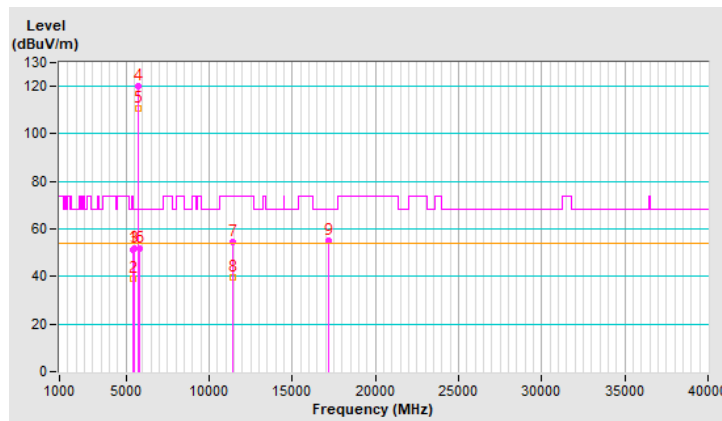




RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5567.69	50.6 PK	68.2	-17.6	1.00 H	155	48.4	2.2
2	*5745.00	107.8 PK			1.00 H	155	105.3	2.5
3	*5745.00	99.2 AV			1.00 H	155	96.7	2.5
4	#5985.74	51.8 PK	68.2	-16.4	1.00 H	155	48.9	2.9
5	11490.00	50.3 PK	74.0	-23.7	1.16 H	334	37.9	12.4
6	11490.00	39.3 AV	54.0	-14.7	1.16 H	334	26.9	12.4
7	#17235.00	49.7 PK	68.2	-18.5	1.39 H	318	33.0	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

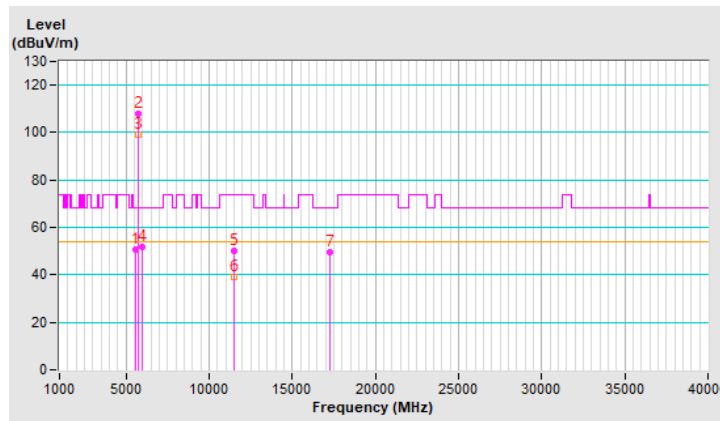


RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.54	54.8 PK	68.2	-13.4	1.58 V	277	52.5	2.3
2	*5745.00	120.3 PK			1.58 V	277	117.8	2.5
3	*5745.00	110.9 AV			1.58 V	277	108.4	2.5
4	#5976.06	51.3 PK	68.2	-16.9	1.58 V	277	48.4	2.9
5	11490.00	52.5 PK	74.0	-21.5	2.02 V	309	40.1	12.4
6	11490.00	41.4 AV	54.0	-12.6	2.02 V	309	29.0	12.4
7	#17235.00	54.0 PK	68.2	-14.2	3.26 V	49	37.3	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

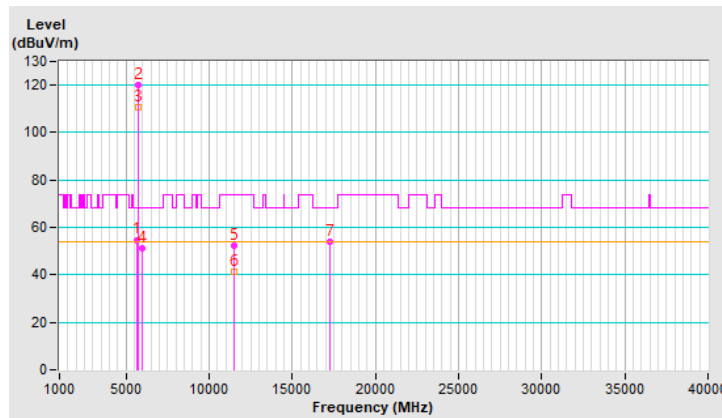


RF Mode	TX 802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5597.65	50.6 PK	68.2	-17.6	1.01 H	236	48.4	2.2
2	*5785.00	107.4 PK			1.01 H	236	104.7	2.7
3	*5785.00	98.8 AV			1.01 H	236	96.1	2.7
4	#5977.27	50.5 PK	68.2	-17.7	1.01 H	236	47.6	2.9
5	11570.00	50.0 PK	74.0	-24.0	1.12 H	341	37.6	12.4
6	11570.00	38.9 AV	54.0	-15.1	1.12 H	341	26.5	12.4
7	#17355.00	49.6 PK	68.2	-18.6	1.33 H	326	32.0	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

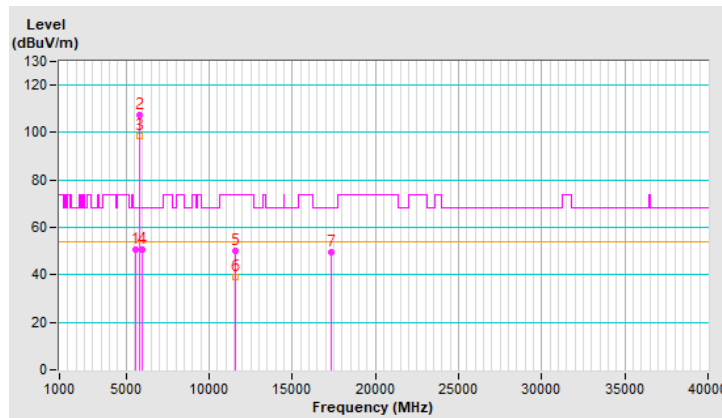




RF Mode	TX 802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5597.55	52.2 PK	68.2	-16.0	1.55 V	257	50.0	2.2
2	*5785.00	120.1 PK			1.55 V	257	117.4	2.7
3	*5785.00	110.7 AV			1.55 V	257	108.0	2.7
4	#5992.07	52.1 PK	68.2	-16.1	1.55 V	257	49.2	2.9
5	11570.00	52.1 PK	74.0	-21.9	2.02 V	325	39.7	12.4
6	11570.00	40.9 AV	54.0	-13.1	2.02 V	325	28.5	12.4
7	#17355.00	53.2 PK	68.2	-15.0	3.22 V	51	35.6	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

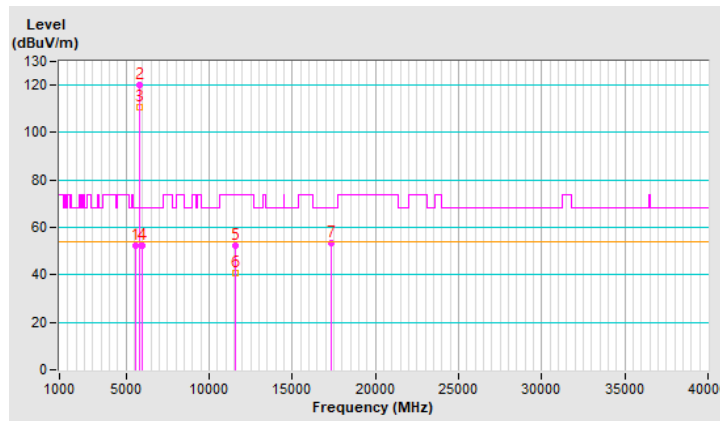


RF Mode	TX 802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5591.36	50.5 PK	68.2	-17.7	1.04 H	236	48.3	2.2
2	*5825.00	107.6 PK			1.04 H	236	104.8	2.8
3	*5825.00	99.1 AV			1.04 H	236	96.3	2.8
4	#5934.95	50.8 PK	68.2	-17.4	1.04 H	236	47.9	2.9
5	11650.00	50.2 PK	74.0	-23.8	1.21 H	329	38.3	11.9
6	11650.00	39.0 AV	54.0	-15.0	1.21 H	329	27.1	11.9
7	#17475.00	49.5 PK	68.2	-18.7	1.34 H	311	31.0	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

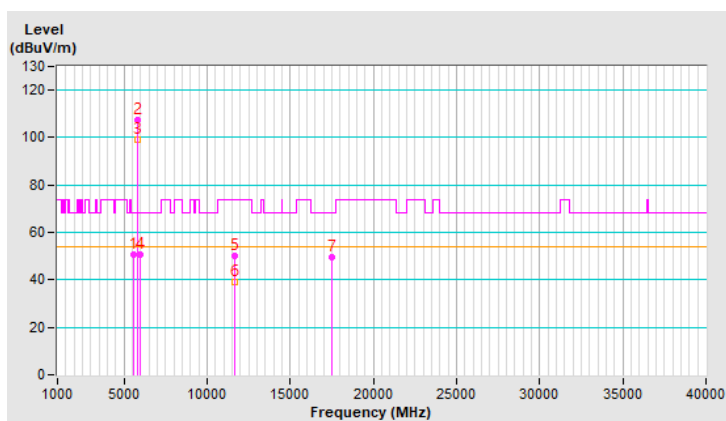




RF Mode	TX 802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5622.40	52.1 PK	68.2	-16.1	1.44 V	249	49.9	2.2
2	*5825.00	120.2 PK			1.44 V	249	117.4	2.8
3	*5825.00	110.8 AV			1.44 V	249	108.0	2.8
4	#5928.73	52.8 PK	68.2	-15.4	1.44 V	249	49.9	2.9
5	11650.00	52.4 PK	74.0	-21.6	2.02 V	316	40.5	11.9
6	11650.00	41.6 AV	54.0	-12.4	2.02 V	316	29.7	11.9
7	#17475.00	53.3 PK	68.2	-14.9	3.21 V	38	34.8	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

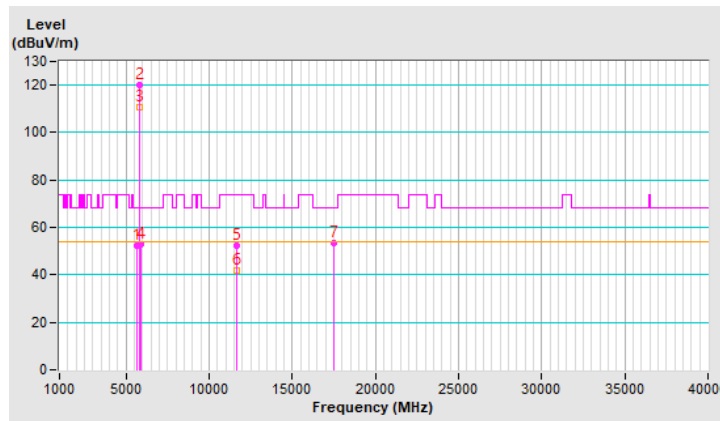


RF Mode	TX 802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.4 PK	74.0	-16.6	1.28 H	181	55.0	2.4
2	5150.00	44.1 AV	54.0	-9.9	1.28 H	181	41.7	2.4
3	*5180.00	107.3 PK			1.28 H	181	105.1	2.2
4	*5180.00	97.6 AV			1.28 H	181	95.4	2.2
5	#10360.00	56.1 PK	68.2	-12.1	1.21 H	339	44.4	11.7
6	15540.00	58.6 PK	74.0	-15.4	1.42 H	312	46.8	11.8
7	15540.00	45.5 AV	54.0	-8.5	1.42 H	312	33.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

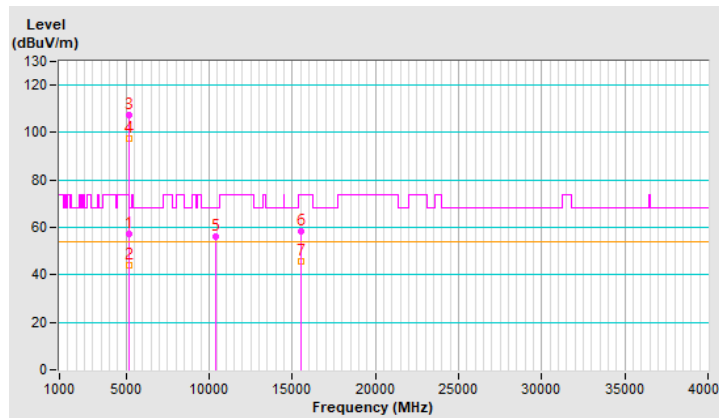


RF Mode	TX 802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.3 PK	74.0	-7.7	1.48 V	270	63.9	2.4
2	5150.00	52.3 AV	54.0	-1.7	1.48 V	270	49.9	2.4
3	*5180.00	117.6 PK			1.48 V	270	115.4	2.2
4	*5180.00	106.9 AV			1.48 V	270	104.7	2.2
5	#10360.00	55.0 PK	68.2	-13.2	2.47 V	186	43.3	11.7
6	15540.00	52.8 PK	74.0	-21.2	1.25 V	321	41.0	11.8
7	15540.00	39.7 AV	54.0	-14.3	1.25 V	321	27.9	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

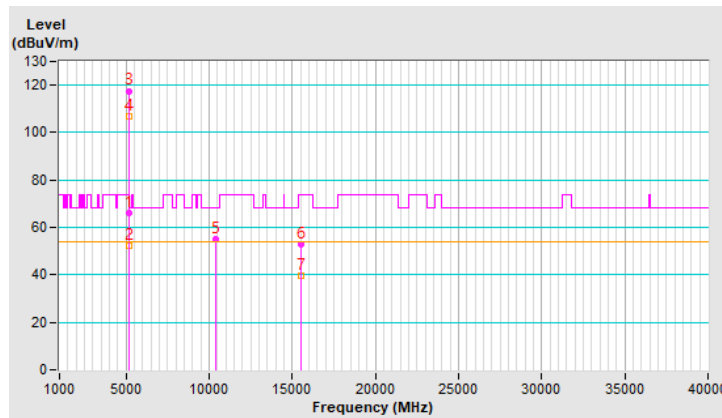


RF Mode	TX 802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.3 PK	74.0	-23.7	1.27 H	181	47.9	2.4
2	5150.00	38.9 AV	54.0	-15.1	1.27 H	181	36.5	2.4
3	*5200.00	108.9 PK			1.27 H	181	106.8	2.1
4	*5200.00	99.2 AV			1.27 H	181	97.1	2.1
5	#10400.00	55.7 PK	68.2	-12.5	1.21 H	330	43.8	11.9
6	15600.00	59.2 PK	74.0	-14.8	1.40 H	322	47.7	11.5
7	15600.00	47.0 AV	54.0	-7.0	1.40 H	322	35.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

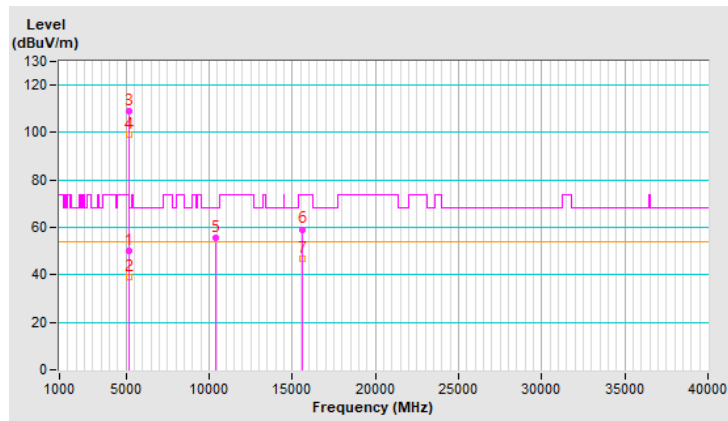


RF Mode	TX 802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.5 PK	74.0	-11.5	1.44 V	272	60.1	2.4
2	5150.00	47.1 AV	54.0	-6.9	1.44 V	272	44.7	2.4
3	*5200.00	119.3 PK			1.44 V	272	117.2	2.1
4	*5200.00	108.5 AV			1.44 V	272	106.4	2.1
5	#10400.00	56.8 PK	68.2	-11.4	2.76 V	183	44.9	11.9
6	15600.00	54.2 PK	74.0	-19.8	1.25 V	256	42.7	11.5
7	15600.00	42.3 AV	54.0	-11.7	1.25 V	256	30.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

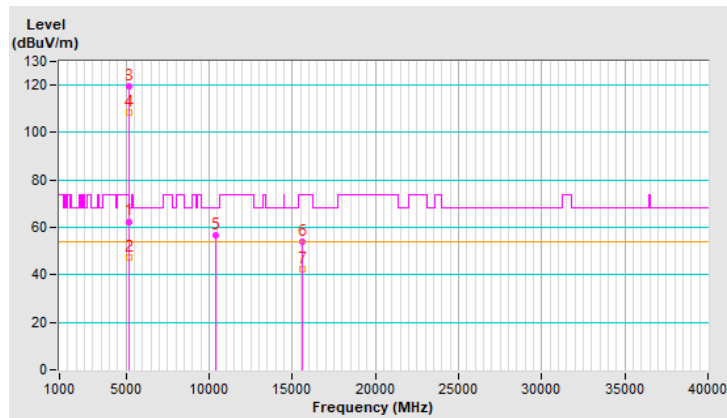




RF Mode	TX 802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	109.2 PK			1.32 H	174	107.3	1.9
2	*5240.00	99.3 AV			1.32 H	174	97.4	1.9
3	5350.00	50.0 PK	74.0	-24.0	1.32 H	174	48.0	2.0
4	5350.00	38.8 AV	54.0	-15.2	1.32 H	174	36.8	2.0
5	#10480.00	55.4 PK	68.2	-12.8	1.18 H	333	43.5	11.9
6	15720.00	59.6 PK	74.0	-14.4	1.40 H	318	47.9	11.7
7	15720.00	47.4 AV	54.0	-6.6	1.40 H	318	35.7	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

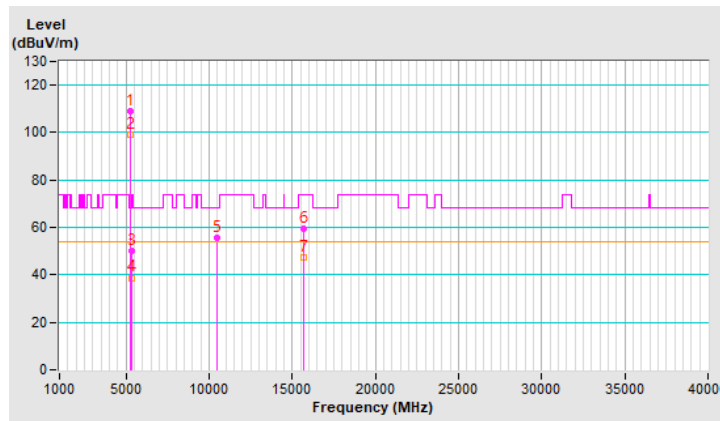


RF Mode	TX 802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	119.4 PK			1.56 V	271	117.5	1.9
2	*5240.00	108.6 AV			1.56 V	271	106.7	1.9
3	5350.00	51.2 PK	74.0	-22.8	1.56 V	271	49.2	2.0
4	5350.00	38.8 AV	54.0	-15.2	1.56 V	271	36.8	2.0
5	#10480.00	57.0 PK	68.2	-11.2	2.79 V	179	45.1	11.9
6	15720.00	53.8 PK	74.0	-20.2	1.26 V	249	42.1	11.7
7	15720.00	42.0 AV	54.0	-12.0	1.26 V	249	30.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

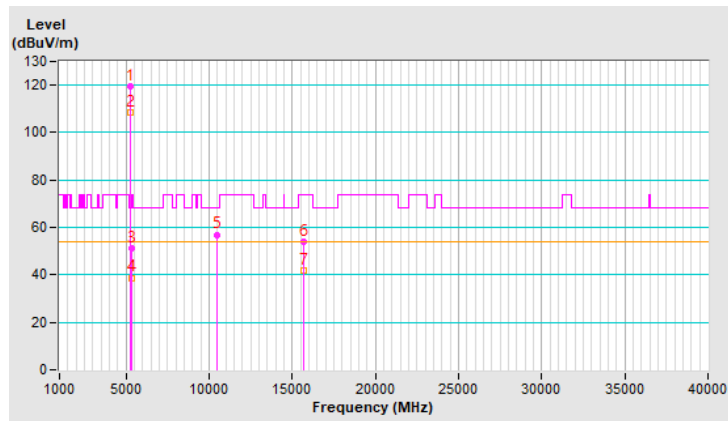


RF Mode	TX 802.11ax (HE20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.1 PK	74.0	-23.9	1.29 H	195	47.7	2.4
2	5150.00	39.1 AV	54.0	-14.9	1.29 H	195	36.7	2.4
3	*5260.00	108.9 PK			1.29 H	195	107.1	1.8
4	*5260.00	99.5 AV			1.29 H	195	97.7	1.8
5	#10520.00	46.4 PK	68.2	-21.8	1.45 H	327	34.4	12.0
6	15780.00	52.2 PK	74.0	-21.8	1.29 H	360	40.7	11.5
7	15780.00	40.6 AV	54.0	-13.4	1.29 H	360	29.1	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

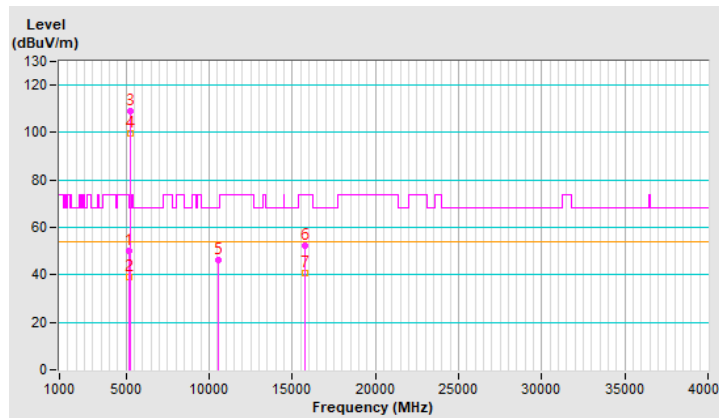


RF Mode	TX 802.11ax (HE20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.0 PK	74.0	-23.0	1.45 V	261	48.6	2.4
2	5150.00	38.6 AV	54.0	-15.4	1.45 V	261	36.2	2.4
3	*5260.00	119.8 PK			1.45 V	261	118.0	1.8
4	*5260.00	108.9 AV			1.45 V	261	107.1	1.8
5	#10520.00	51.4 PK	68.2	-16.8	1.64 V	173	39.4	12.0
6	15780.00	58.2 PK	74.0	-15.8	2.04 V	260	46.7	11.5
7	15780.00	44.5 AV	54.0	-9.5	2.04 V	260	33.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

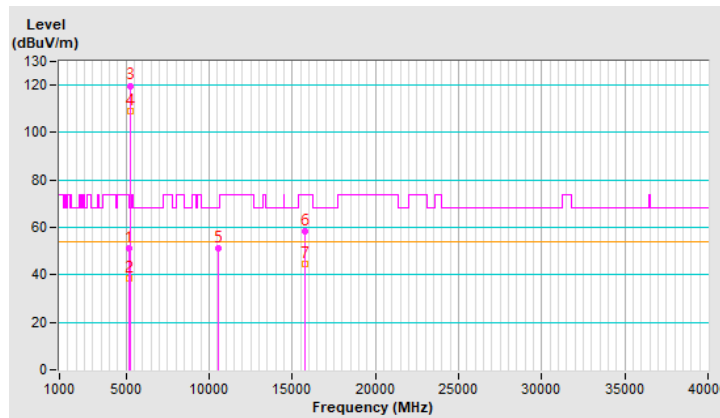


RF Mode	TX 802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	108.4 PK			1.34 H	144	106.7	1.7
2	*5300.00	98.3 AV			1.34 H	144	96.6	1.7
3	5350.00	50.5 PK	74.0	-23.5	1.34 H	144	48.5	2.0
4	5350.00	39.6 AV	54.0	-14.4	1.34 H	144	37.6	2.0
5	10600.00	46.2 PK	74.0	-27.8	1.46 H	311	34.5	11.7
6	10600.00	35.2 AV	54.0	-18.8	1.46 H	311	23.5	11.7
7	15900.00	52.3 PK	74.0	-21.7	1.30 H	360	41.2	11.1
8	15900.00	40.9 AV	54.0	-13.1	1.30 H	360	29.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

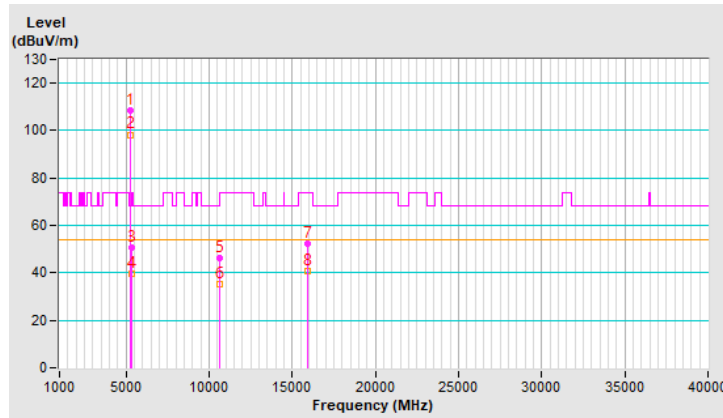


RF Mode	TX 802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	119.8 PK			1.40 V	281	118.1	1.7
2	*5300.00	109.1 AV			1.40 V	281	107.4	1.7
3	5350.00	60.7 PK	74.0	-13.3	1.40 V	281	58.7	2.0
4	5350.00	45.7 AV	54.0	-8.3	1.40 V	281	43.7	2.0
5	10600.00	50.8 PK	74.0	-23.2	1.70 V	167	39.1	11.7
6	10600.00	37.7 AV	54.0	-16.3	1.70 V	167	26.0	11.7
7	15900.00	58.5 PK	74.0	-15.5	2.03 V	268	47.4	11.1
8	15900.00	44.7 AV	54.0	-9.3	2.03 V	268	33.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

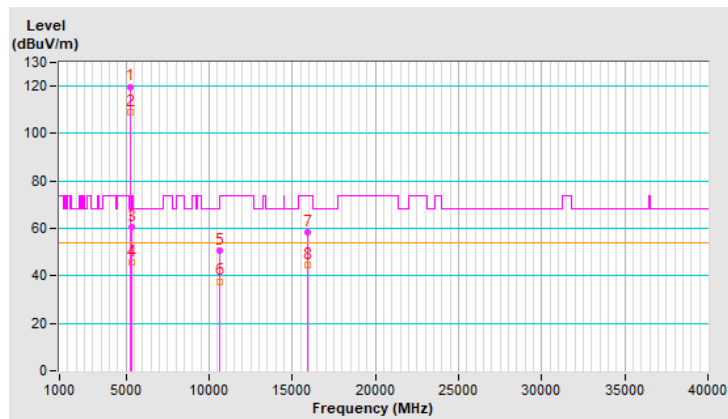


RF Mode	TX 802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	106.7 PK			1.37 H	150	105.0	1.7
2	*5320.00	96.4 AV			1.37 H	150	94.7	1.7
3	5350.00	59.1 PK	74.0	-14.9	1.37 H	150	57.1	2.0
4	5350.00	43.0 AV	54.0	-11.0	1.37 H	150	41.0	2.0
5	10640.00	45.8 PK	74.0	-28.2	1.48 H	322	34.2	11.6
6	10640.00	35.8 AV	54.0	-18.2	1.48 H	322	24.2	11.6
7	15960.00	52.4 PK	74.0	-21.6	1.26 H	360	41.0	11.4
8	15960.00	40.8 AV	54.0	-13.2	1.26 H	360	29.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

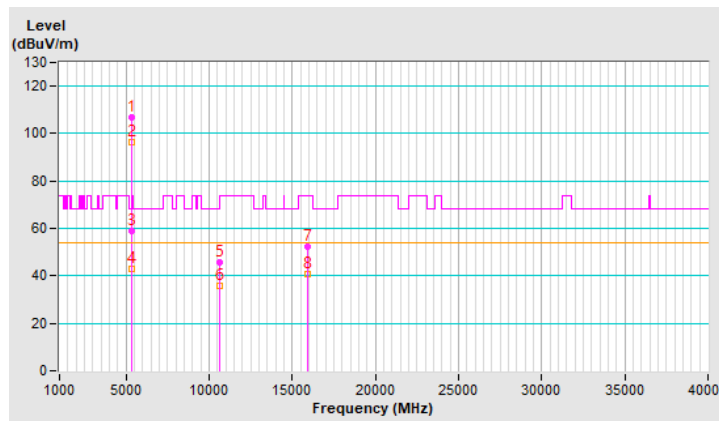


RF Mode	TX 802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	117.1 PK			1.57 V	276	115.4	1.7
2	*5320.00	107.2 AV			1.57 V	276	105.5	1.7
3	5350.00	70.5 PK	74.0	-3.5	1.57 V	276	68.5	2.0
4	5350.00	52.3 AV	54.0	-1.7	1.57 V	276	50.3	2.0
5	10640.00	48.1 PK	74.0	-25.9	1.65 V	173	36.5	11.6
6	10640.00	36.0 AV	54.0	-18.0	1.65 V	173	24.4	11.6
7	15960.00	53.7 PK	74.0	-20.3	2.05 V	255	42.3	11.4
8	15960.00	41.2 AV	54.0	-12.8	2.05 V	255	29.8	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

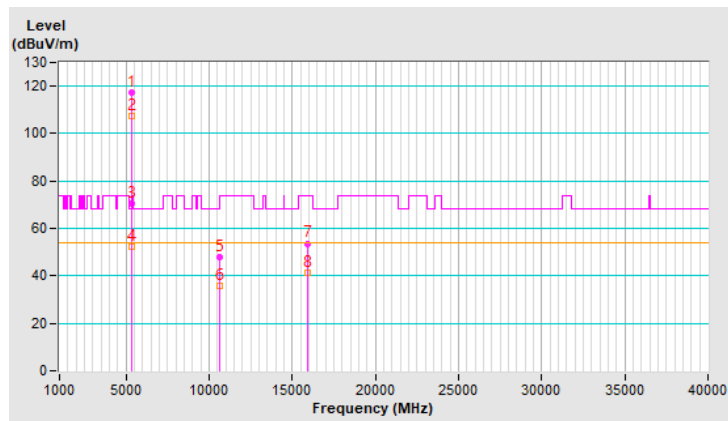


RF Mode	TX 802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.1 PK	74.0	-20.9	2.87 H	116	50.9	2.2
2	5460.00	40.7 AV	54.0	-13.3	2.87 H	116	38.5	2.2
3	#5468.80	61.8 PK	68.2	-6.4	2.87 H	116	59.6	2.2
4	*5500.00	107.0 PK			2.87 H	116	104.9	2.1
5	*5500.00	96.7 AV			2.87 H	116	94.6	2.1
6	11000.00	46.5 PK	74.0	-27.5	1.55 H	337	34.4	12.1
7	11000.00	36.7 AV	54.0	-17.3	1.55 H	337	24.6	12.1
8	#16500.00	51.0 PK	68.2	-17.2	1.33 H	360	37.6	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

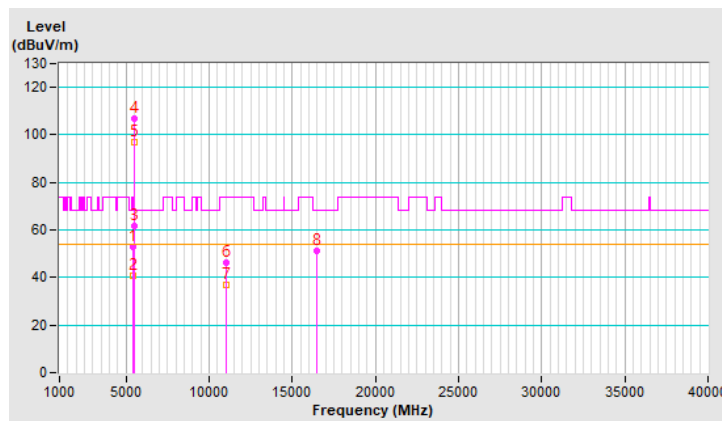


RF Mode	TX 802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.3 PK	74.0	-14.7	1.47 V	276	57.1	2.2
2	5460.00	46.7 AV	54.0	-7.3	1.47 V	276	44.5	2.2
3	#5470.00	66.6 PK	68.2	-1.6	1.47 V	276	64.4	2.2
4	*5500.00	116.9 PK			1.47 V	276	114.8	2.1
5	*5500.00	107.1 AV			1.47 V	276	105.0	2.1
6	11000.00	48.6 PK	74.0	-25.4	1.96 V	304	36.5	12.1
7	11000.00	34.8 AV	54.0	-19.2	1.96 V	304	22.7	12.1
8	#16500.00	51.2 PK	68.2	-17.0	1.93 V	249	37.8	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

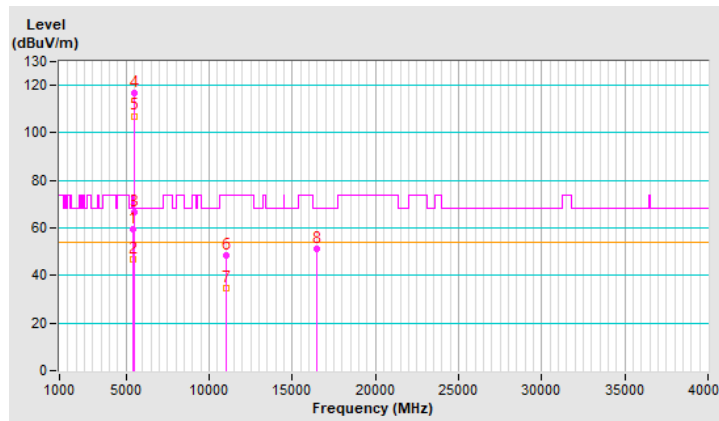


RF Mode	TX 802.11ax (HE20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	108.3 PK			1.34 H	132	106.1	2.2
2	*5580.00	98.5 AV			1.34 H	132	96.3	2.2
3	11160.00	46.5 PK	74.0	-27.5	1.57 H	324	34.6	11.9
4	11160.00	36.7 AV	54.0	-17.3	1.57 H	324	24.8	11.9
5	#16740.00	50.4 PK	68.2	-17.8	1.35 H	352	35.2	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

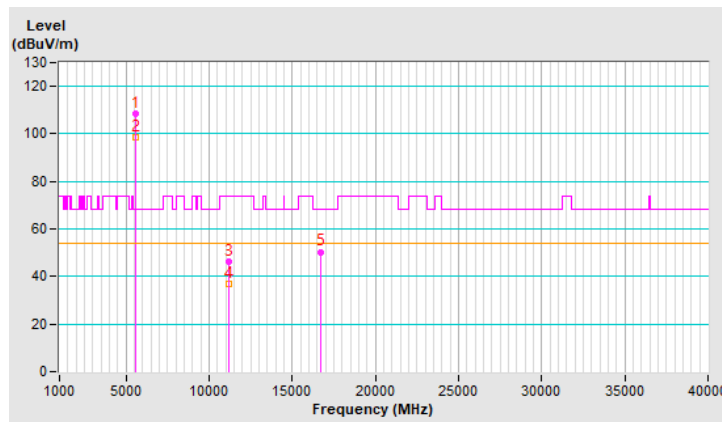


RF Mode	TX 802.11ax (HE20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	118.9 PK			1.60 V	280	116.7	2.2
2	*5580.00	108.8 AV			1.60 V	280	106.6	2.2
3	11160.00	48.2 PK	74.0	-25.8	1.95 V	320	36.3	11.9
4	11160.00	34.9 AV	54.0	-19.1	1.95 V	320	23.0	11.9
5	#16740.00	50.6 PK	68.2	-17.6	1.84 V	272	35.4	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

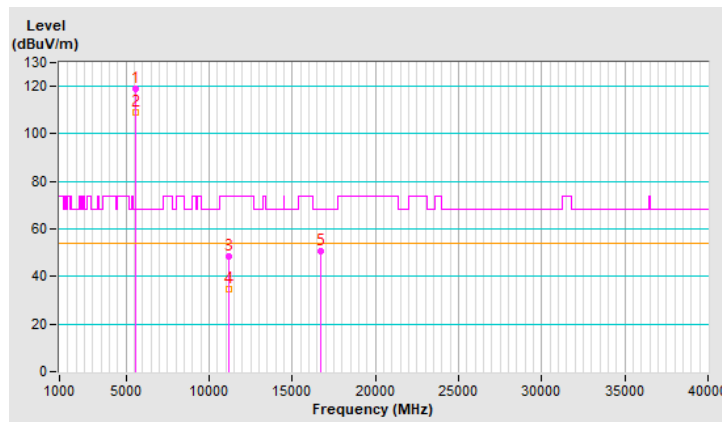


RF Mode	TX 802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	105.5 PK			1.18 H	113	103.2	2.3
2	*5700.00	94.5 AV			1.18 H	113	92.2	2.3
3	#5725.00	55.4 PK	68.2	-12.8	1.18 H	113	52.9	2.5
4	11400.00	45.7 PK	74.0	-28.3	1.55 H	323	33.5	12.2
5	11400.00	36.0 AV	54.0	-18.0	1.55 H	323	23.8	12.2
6	#17100.00	50.7 PK	68.2	-17.5	1.31 H	347	34.1	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

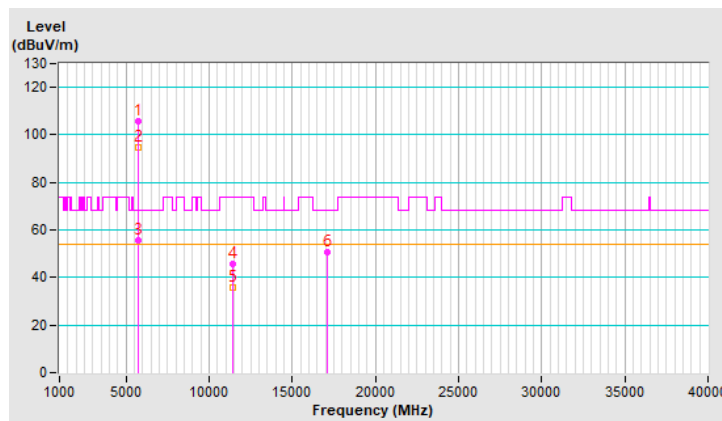


RF Mode	TX 802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	115.4 PK			1.52 V	285	113.1	2.3
2	*5700.00	105.3 AV			1.52 V	285	103.0	2.3
3	#5725.00	66.7 PK	68.2	-1.5	1.52 V	285	64.2	2.5
4	11400.00	47.6 PK	74.0	-26.4	1.99 V	321	35.4	12.2
5	11400.00	34.9 AV	54.0	-19.1	1.99 V	321	22.7	12.2
6	#17100.00	51.1 PK	68.2	-17.1	1.99 V	269	34.5	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

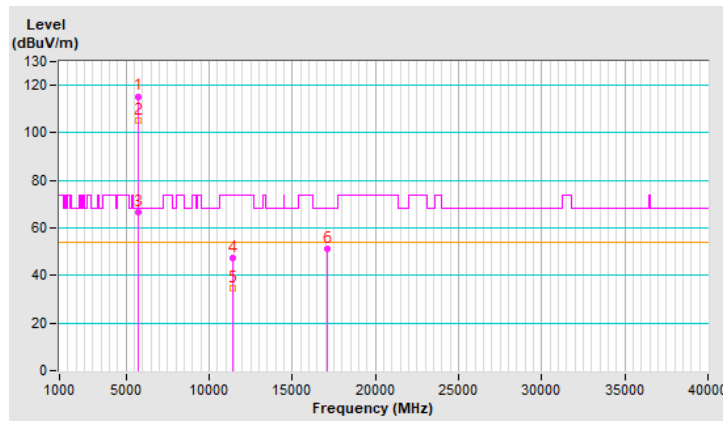


RF Mode	TX 802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.7 PK	74.0	-22.3	1.38 H	133	49.5	2.2
2	5460.00	39.2 AV	54.0	-14.8	1.38 H	133	37.0	2.2
3	#5470.00	52.1 PK	68.2	-16.1	1.38 H	133	49.9	2.2
4	*5720.00	108.1 PK			1.38 H	133	105.7	2.4
5	*5720.00	98.3 AV			1.38 H	133	95.9	2.4
6	#5850.00	51.9 PK	68.2	-16.3	1.38 H	133	49.0	2.9
7	11440.00	45.7 PK	74.0	-28.3	1.51 H	322	33.5	12.2
8	11440.00	36.1 AV	54.0	-17.9	1.51 H	322	23.9	12.2
9	#17160.00	50.8 PK	68.2	-17.4	1.29 H	343	34.3	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

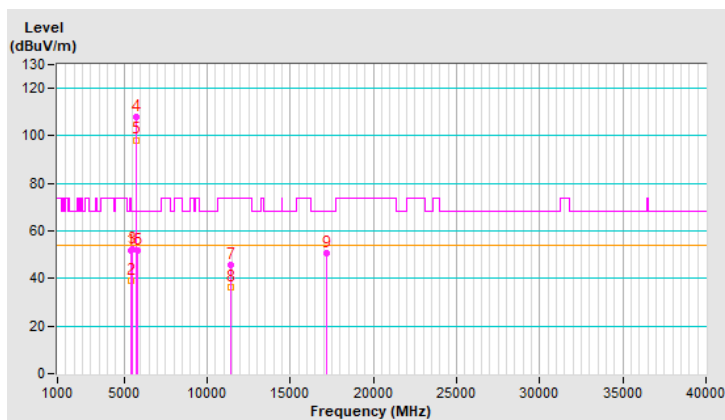




RF Mode	TX 802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.3 PK	74.0	-22.7	1.46 V	274	49.1	2.2
2	5460.00	39.2 AV	54.0	-14.8	1.46 V	274	37.0	2.2
3	#5470.00	51.6 PK	68.2	-16.6	1.46 V	274	49.4	2.2
4	*5720.00	119.9 PK			1.46 V	274	117.5	2.4
5	*5720.00	109.4 AV			1.46 V	274	107.0	2.4
6	#5850.00	51.9 PK	68.2	-16.3	1.46 V	274	49.0	2.9
7	11440.00	48.8 PK	74.0	-25.2	2.01 V	317	36.6	12.2
8	11440.00	35.3 AV	54.0	-18.7	2.01 V	317	23.1	12.2
9	#17160.00	51.1 PK	68.2	-17.1	1.90 V	263	34.6	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

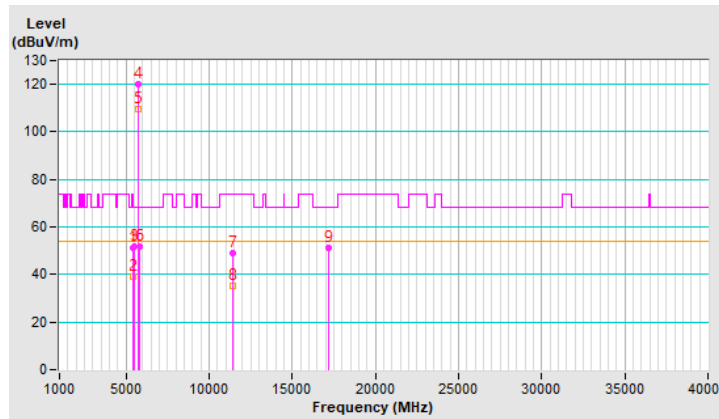


RF Mode	TX 802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.34	50.5 PK	68.2	-17.7	1.02 H	152	48.2	2.3
2	*5745.00	109.9 PK			1.02 H	152	107.4	2.5
3	*5745.00	99.4 AV			1.02 H	152	96.9	2.5
4	#6012.99	50.3 PK	68.2	-17.9	1.02 H	152	47.4	2.9
5	11490.00	59.1 PK	74.0	-14.9	1.19 H	330	46.7	12.4
6	11490.00	48.0 AV	54.0	-6.0	1.19 H	330	35.6	12.4
7	#17235.00	50.5 PK	68.2	-17.7	1.43 H	306	33.8	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

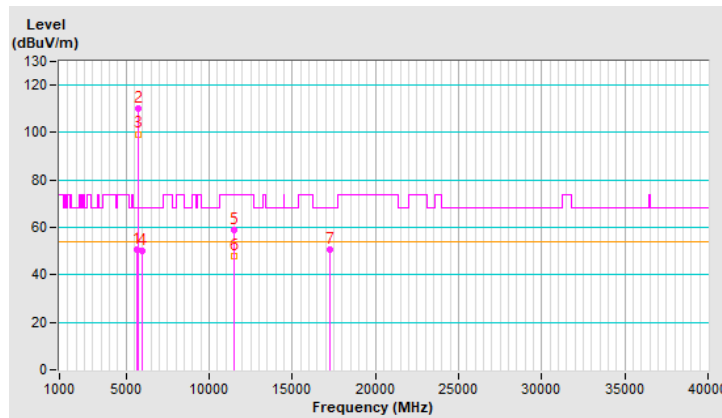


RF Mode	TX 802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5580.57	53.0 PK	68.2	-15.2	1.59 V	267	50.8	2.2
2	*5745.00	120.8 PK			1.59 V	267	118.3	2.5
3	*5745.00	110.0 AV			1.59 V	267	107.5	2.5
4	#6009.19	52.2 PK	68.2	-16.0	1.59 V	267	49.3	2.9
5	11490.00	60.8 PK	74.0	-13.2	2.42 V	290	48.4	12.4
6	11490.00	49.1 AV	54.0	-4.9	2.42 V	290	36.7	12.4
7	#17235.00	52.5 PK	68.2	-15.7	2.74 V	56	35.8	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

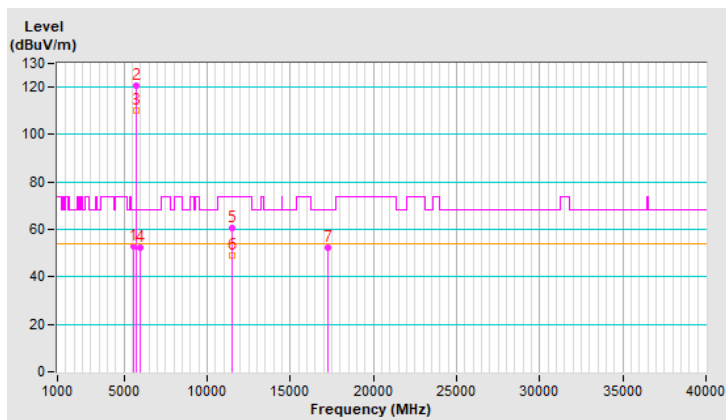


RF Mode	TX 802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5643.87	50.8 PK	68.2	-17.4	1.09 H	234	48.5	2.3
2	*5785.00	109.2 PK			1.09 H	234	106.5	2.7
3	*5785.00	98.9 AV			1.09 H	234	96.2	2.7
4	#5950.47	50.5 PK	68.2	-17.7	1.09 H	234	47.6	2.9
5	11570.00	59.2 PK	74.0	-14.8	1.23 H	319	46.8	12.4
6	11570.00	47.8 AV	54.0	-6.2	1.23 H	319	35.4	12.4
7	#17355.00	49.9 PK	68.2	-18.3	1.45 H	293	32.3	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

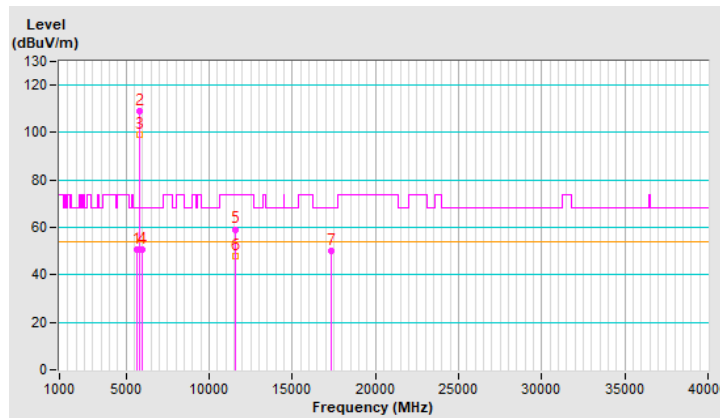




RF Mode	TX 802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5564.50	52.0 PK	68.2	-16.2	1.56 V	254	49.8	2.2
2	*5785.00	121.0 PK			1.56 V	254	118.3	2.7
3	*5785.00	110.2 AV			1.56 V	254	107.5	2.7
4	#5958.89	52.3 PK	68.2	-15.9	1.56 V	254	49.4	2.9
5	11570.00	60.7 PK	74.0	-13.3	2.37 V	296	48.3	12.4
6	11570.00	49.2 AV	54.0	-4.8	2.37 V	296	36.8	12.4
7	#17355.00	52.6 PK	68.2	-15.6	2.77 V	58	35.0	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

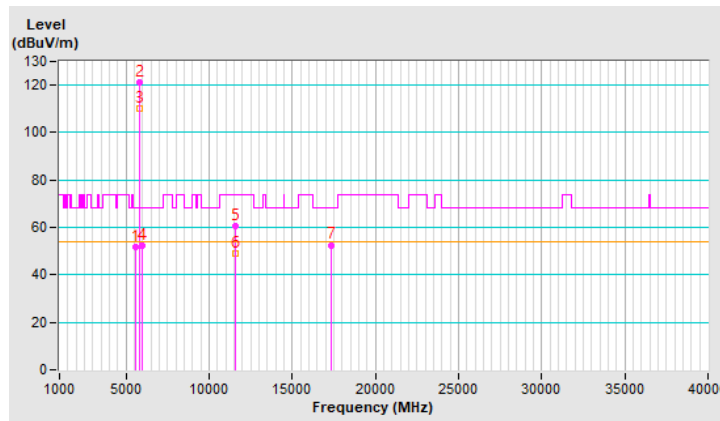


RF Mode	TX 802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5583.05	51.1 PK	68.2	-17.1	1.07 H	235	48.9	2.2
2	*5825.00	110.1 PK			1.07 H	235	107.3	2.8
3	*5825.00	99.8 AV			1.07 H	235	97.0	2.8
4	#6002.68	50.5 PK	68.2	-17.7	1.07 H	235	47.6	2.9
5	11650.00	58.8 PK	74.0	-15.2	1.19 H	340	46.9	11.9
6	11650.00	47.9 AV	54.0	-6.1	1.19 H	340	36.0	11.9
7	#17475.00	49.9 PK	68.2	-18.3	1.42 H	294	31.4	18.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

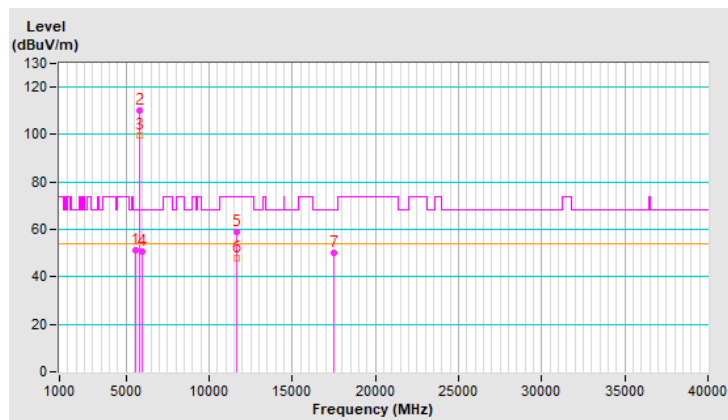


RF Mode	TX 802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5558.65	52.0 PK	68.2	-16.2	1.50 V	274	49.8	2.2
2	*5825.00	122.0 PK			1.50 V	274	119.2	2.8
3	*5825.00	110.8 AV			1.50 V	274	108.0	2.8
4	#5947.69	52.4 PK	68.2	-15.8	1.50 V	274	49.5	2.9
5	11650.00	60.7 PK	74.0	-13.3	2.43 V	304	48.8	11.9
6	11650.00	48.9 AV	54.0	-5.1	2.43 V	304	37.0	11.9
7	#17475.00	52.0 PK	68.2	-16.2	2.73 V	67	33.5	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

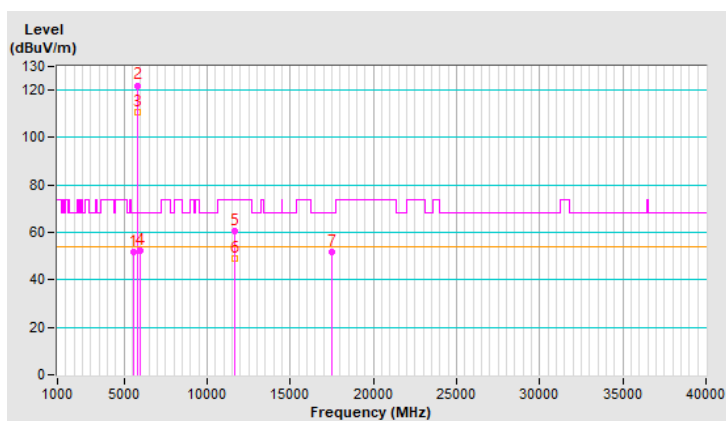


RF Mode	TX 802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.5 PK	74.0	-6.5	1.21 H	178	65.1	2.4
2	5150.00	44.7 AV	54.0	-9.3	1.21 H	178	42.3	2.4
3	*5190.00	101.9 PK			1.21 H	178	99.7	2.2
4	*5190.00	90.8 AV			1.21 H	178	88.6	2.2
5	#10380.00	50.2 PK	68.2	-18.0	1.22 H	331	38.4	11.8
6	15570.00	51.8 PK	74.0	-22.2	1.37 H	319	40.0	11.8
7	15570.00	39.4 AV	54.0	-14.6	1.37 H	319	27.6	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

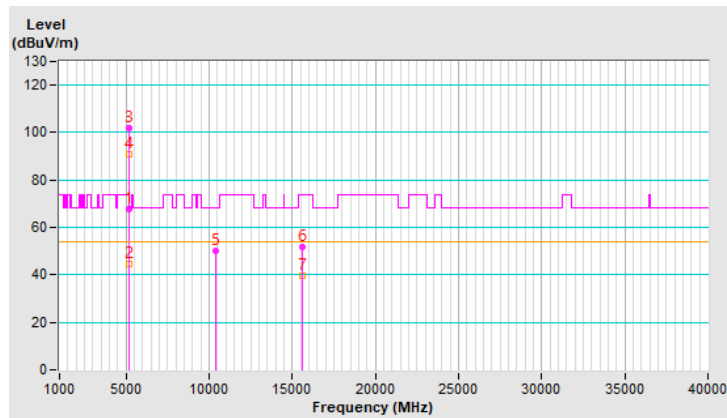


RF Mode	TX 802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.8 PK	74.0	-5.2	1.50 V	272	66.4	2.4
2	5150.00	52.4 AV	54.0	-1.6	1.50 V	272	50.0	2.4
3	*5190.00	110.7 PK			1.50 V	272	108.5	2.2
4	*5190.00	100.0 AV			1.50 V	272	97.8	2.2
5	#10380.00	49.1 PK	68.2	-19.1	2.51 V	185	37.3	11.8
6	15570.00	48.6 PK	74.0	-25.4	1.21 V	327	36.8	11.8
7	15570.00	35.9 AV	54.0	-18.1	1.21 V	327	24.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

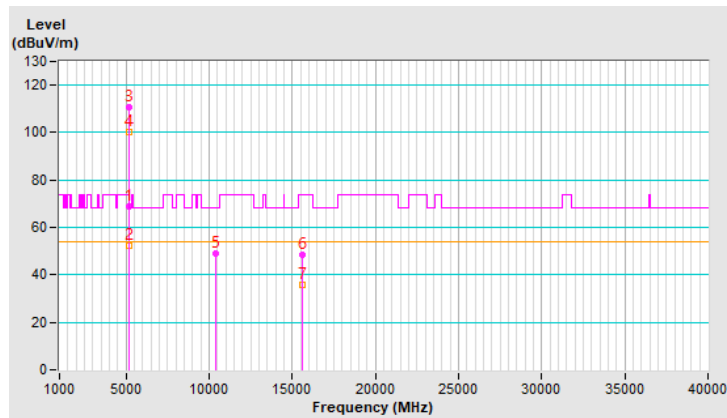


RF Mode	TX 802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.2 PK	74.0	-10.8	1.17 H	174	60.8	2.4
2	5150.00	42.0 AV	54.0	-12.0	1.17 H	174	39.6	2.4
3	*5230.00	108.0 PK			1.17 H	174	106.0	2.0
4	*5230.00	96.9 AV			1.17 H	174	94.9	2.0
5	5350.00	55.2 PK	74.0	-18.8	1.17 H	174	53.2	2.0
6	5350.00	38.2 AV	54.0	-15.8	1.17 H	174	36.2	2.0
7	#10460.00	56.4 PK	68.2	-11.8	1.26 H	328	44.4	12.0
8	15690.00	58.4 PK	74.0	-15.6	1.36 H	323	46.5	11.9
9	15690.00	45.4 AV	54.0	-8.6	1.36 H	323	33.5	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

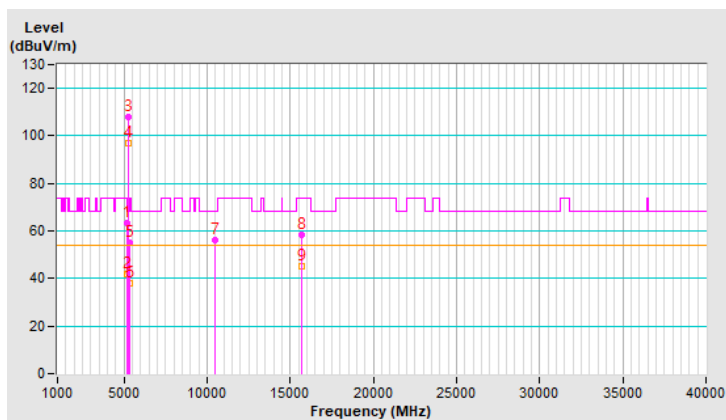


RF Mode	TX 802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.0 PK	74.0	-5.0	1.46 V	274	66.6	2.4
2	5150.00	49.1 AV	54.0	-4.9	1.46 V	274	46.7	2.4
3	*5230.00	116.9 PK			1.46 V	274	114.9	2.0
4	*5230.00	106.0 AV			1.46 V	274	104.0	2.0
5	5350.00	61.7 PK	74.0	-12.3	1.46 V	274	59.7	2.0
6	5350.00	41.0 AV	54.0	-13.0	1.46 V	274	39.0	2.0
7	#10460.00	55.4 PK	68.2	-12.8	2.48 V	200	43.4	12.0
8	15690.00	53.0 PK	74.0	-21.0	1.30 V	316	41.1	11.9
9	15690.00	40.1 AV	54.0	-13.9	1.30 V	316	28.2	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

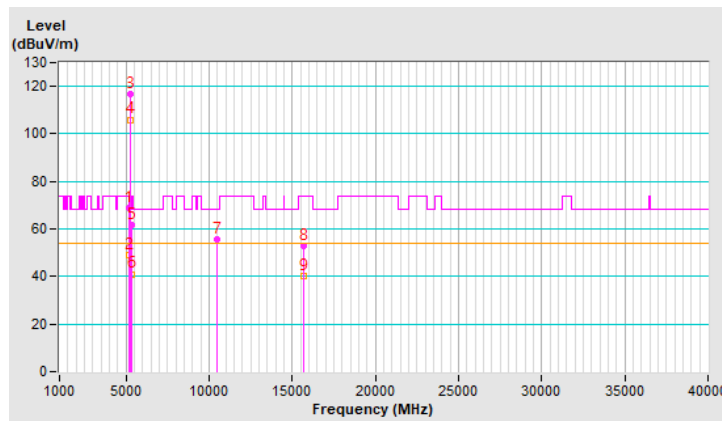


RF Mode	TX 802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.9 PK	74.0	-19.1	1.13 H	168	52.5	2.4
2	5150.00	38.1 AV	54.0	-15.9	1.13 H	168	35.7	2.4
3	*5270.00	107.7 PK			1.13 H	168	105.9	1.8
4	*5270.00	96.7 AV			1.13 H	168	94.9	1.8
5	5350.00	57.0 PK	74.0	-17.0	1.13 H	168	55.0	2.0
6	5350.00	40.5 AV	54.0	-13.5	1.13 H	168	38.5	2.0
7	#10540.00	45.7 PK	68.2	-22.5	1.49 H	337	33.8	11.9
8	15810.00	50.1 PK	74.0	-23.9	1.28 H	360	38.7	11.4
9	15810.00	38.6 AV	54.0	-15.4	1.28 H	360	27.2	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

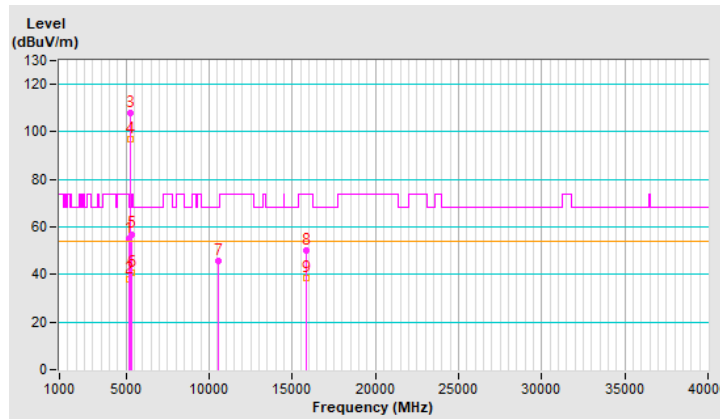


RF Mode	TX 802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.3 PK	74.0	-15.7	1.44 V	272	55.9	2.4
2	5150.00	41.1 AV	54.0	-12.9	1.44 V	272	38.7	2.4
3	*5270.00	116.6 PK			1.44 V	272	114.8	1.8
4	*5270.00	105.8 AV			1.44 V	272	104.0	1.8
5	5350.00	70.1 PK	74.0	-3.9	1.44 V	272	68.1	2.0
6	5350.00	52.5 AV	54.0	-1.5	1.44 V	272	50.5	2.0
7	#10540.00	48.6 PK	68.2	-19.6	1.68 V	166	36.7	11.9
8	15810.00	54.2 PK	74.0	-19.8	2.04 V	267	42.8	11.4
9	15810.00	41.4 AV	54.0	-12.6	2.04 V	267	30.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

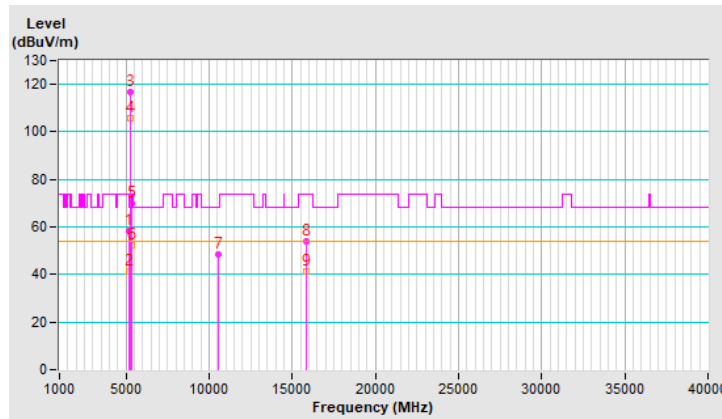




RF Mode	TX 802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	100.9 PK			1.42 H	144	99.2	1.7
2	*5310.00	89.8 AV			1.42 H	144	88.1	1.7
3	5350.00	57.7 PK	74.0	-16.3	1.42 H	144	55.7	2.0
4	5350.00	41.0 AV	54.0	-13.0	1.42 H	144	39.0	2.0
5	10620.00	46.2 PK	74.0	-27.8	1.55 H	331	34.6	11.6
6	10620.00	35.5 AV	54.0	-18.5	1.55 H	331	23.9	11.6
7	15930.00	47.3 PK	74.0	-26.7	1.22 H	360	36.0	11.3
8	15930.00	35.0 AV	54.0	-19.0	1.22 H	360	23.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

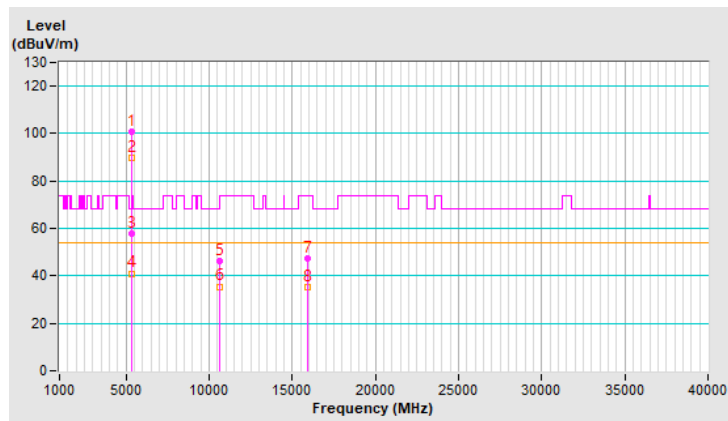


RF Mode	TX 802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	112.9 PK			1.42 V	270	111.2	1.7
2	*5310.00	100.8 AV			1.42 V	270	99.1	1.7
3	5350.00	72.5 PK	74.0	-1.5	1.42 V	270	70.5	2.0
4	5350.00	51.2 AV	54.0	-2.8	1.42 V	270	49.2	2.0
5	10620.00	47.7 PK	74.0	-26.3	1.65 V	179	36.1	11.6
6	10620.00	35.8 AV	54.0	-18.2	1.65 V	179	24.2	11.6
7	15930.00	49.6 PK	74.0	-24.4	2.06 V	268	38.3	11.3
8	15930.00	38.2 AV	54.0	-15.8	2.06 V	268	26.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

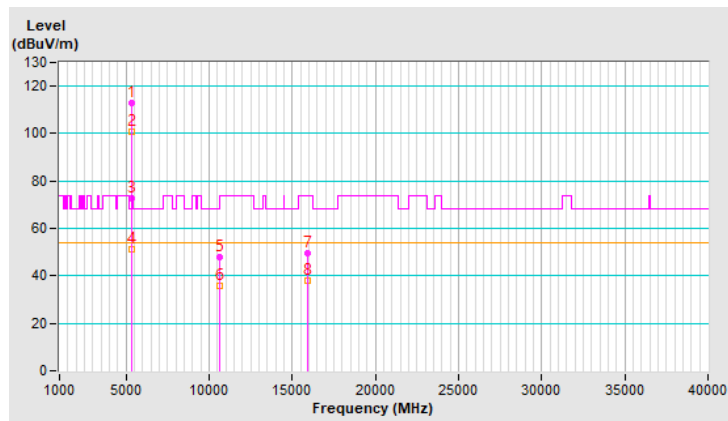


RF Mode	TX 802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.9 PK	74.0	-19.1	2.92 H	109	52.7	2.2
2	5460.00	39.9 AV	54.0	-14.1	2.92 H	109	37.7	2.2
3	#5467.60	60.7 PK	68.2	-7.5	2.92 H	109	58.5	2.2
4	*5510.00	101.4 PK			2.92 H	109	99.3	2.1
5	*5510.00	90.4 AV			2.92 H	109	88.3	2.1
6	11020.00	46.2 PK	74.0	-27.8	1.55 H	329	34.1	12.1
7	11020.00	36.3 AV	54.0	-17.7	1.55 H	329	24.2	12.1
8	#16530.00	50.5 PK	68.2	-17.7	1.31 H	357	36.8	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

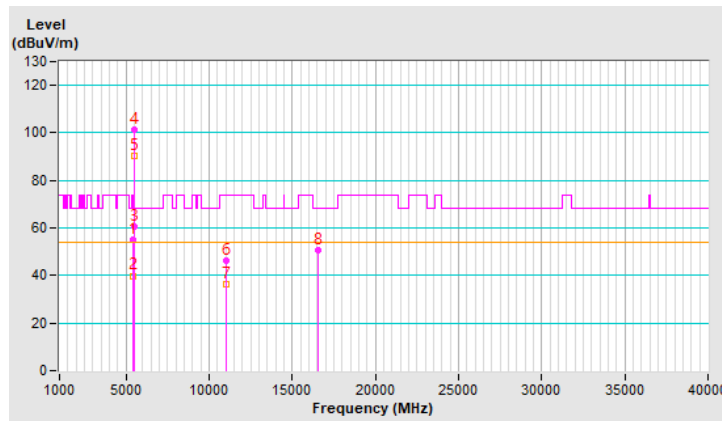


RF Mode	TX 802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.5 PK	74.0	-11.5	1.38 V	277	60.3	2.2
2	5460.00	45.9 AV	54.0	-8.1	1.38 V	277	43.7	2.2
3	#5467.50	66.3 PK	68.2	-1.9	1.38 V	277	64.1	2.2
4	*5510.00	110.7 PK			1.38 V	277	108.6	2.1
5	*5510.00	100.2 AV			1.38 V	277	98.1	2.1
6	11020.00	47.2 PK	74.0	-26.8	1.98 V	322	35.1	12.1
7	11020.00	34.6 AV	54.0	-19.4	1.98 V	322	22.5	12.1
8	#16530.00	49.6 PK	68.2	-18.6	2.04 V	267	35.9	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

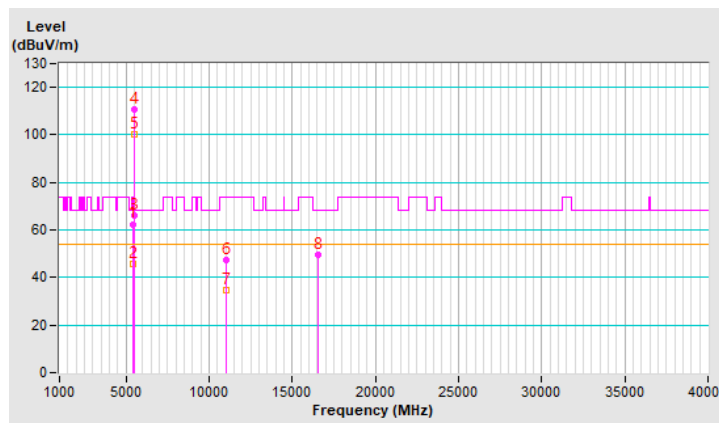


RF Mode	TX 802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.3 PK	74.0	-18.7	2.84 H	106	53.1	2.2
2	5460.00	39.2 AV	54.0	-14.8	2.84 H	106	37.0	2.2
3	#5468.90	57.0 PK	68.2	-11.2	2.84 H	106	54.8	2.2
4	*5550.00	106.1 PK			2.84 H	106	103.9	2.2
5	*5550.00	94.9 AV			2.84 H	106	92.7	2.2
6	11100.00	45.8 PK	74.0	-28.2	1.58 H	312	33.9	11.9
7	11100.00	36.4 AV	54.0	-17.6	1.58 H	312	24.5	11.9
8	#16650.00	50.8 PK	68.2	-17.4	1.32 H	345	36.1	14.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

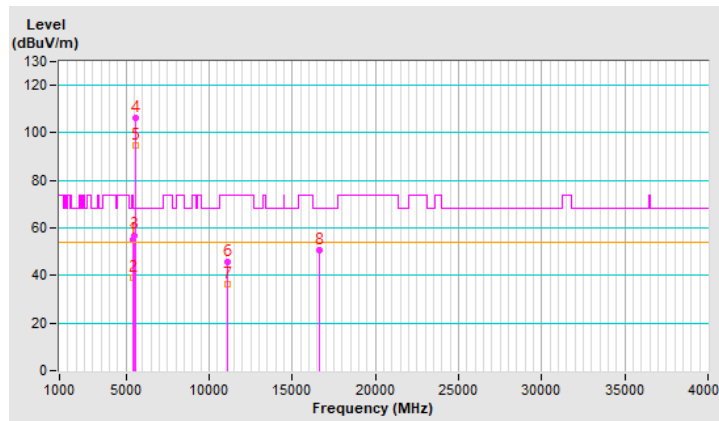


RF Mode	TX 802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.1 PK	74.0	-10.9	1.40 V	256	60.9	2.2
2	5460.00	45.0 AV	54.0	-9.0	1.40 V	256	42.8	2.2
3	#5468.90	66.6 PK	68.2	-1.6	1.40 V	256	64.4	2.2
4	*5550.00	116.2 PK			1.40 V	256	114.0	2.2
5	*5550.00	104.6 AV			1.40 V	256	102.4	2.2
6	11100.00	47.2 PK	74.0	-26.8	1.94 V	330	35.3	11.9
7	11100.00	34.6 AV	54.0	-19.4	1.94 V	330	22.7	11.9
8	#16650.00	51.0 PK	68.2	-17.2	2.02 V	275	36.3	14.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

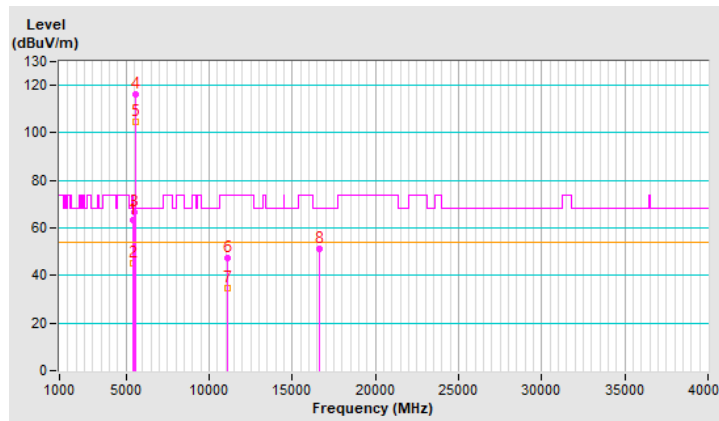


RF Mode	TX 802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	103.9 PK			2.89 H	123	101.7	2.2
2	*5670.00	91.8 AV			2.89 H	123	89.6	2.2
3	#5725.00	57.2 PK	68.2	-11.0	2.89 H	123	54.7	2.5
4	11340.00	45.9 PK	74.0	-28.1	1.51 H	323	33.8	12.1
5	11340.00	36.3 AV	54.0	-17.7	1.51 H	323	24.2	12.1
6	#17010.00	50.3 PK	68.2	-17.9	1.25 H	354	33.8	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

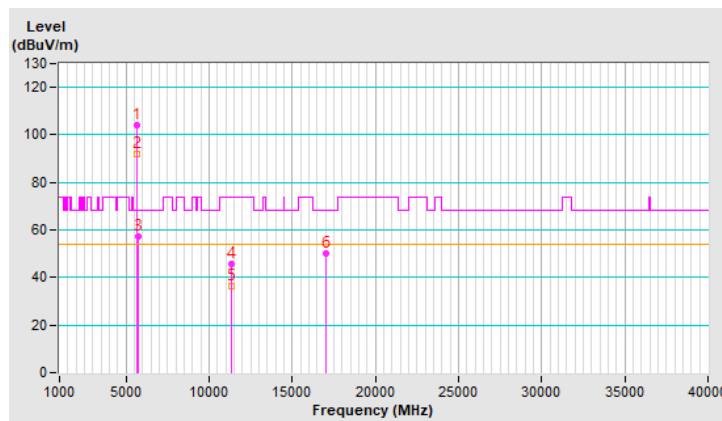


RF Mode	TX 802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	113.5 PK			1.34 V	279	111.3	2.2
2	*5670.00	101.5 AV			1.34 V	279	99.3	2.2
3	#5725.00	66.7 PK	68.2	-1.5	1.34 V	279	64.2	2.5
4	11340.00	47.1 PK	74.0	-26.9	2.04 V	338	35.0	12.1
5	11340.00	34.2 AV	54.0	-19.8	2.04 V	338	22.1	12.1
6	#17010.00	49.0 PK	68.2	-19.2	2.05 V	271	32.5	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

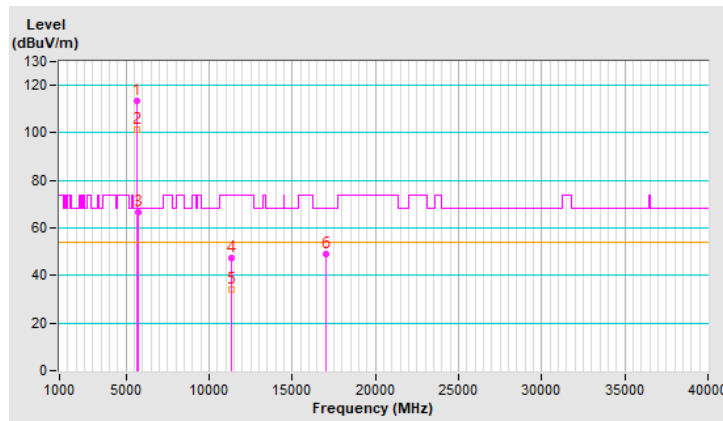


RF Mode	TX 802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.8 PK	74.0	-22.2	2.90 H	111	49.6	2.2
2	5460.00	39.3 AV	54.0	-14.7	2.90 H	111	37.1	2.2
3	#5470.00	51.8 PK	68.2	-16.4	2.90 H	111	49.6	2.2
4	*5710.00	108.1 PK			2.90 H	111	105.7	2.4
5	*5710.00	96.7 AV			2.90 H	111	94.3	2.4
6	#5850.00	53.8 PK	68.2	-14.4	2.90 H	111	50.9	2.9
7	11420.00	46.0 PK	74.0	-28.0	1.60 H	319	33.7	12.3
8	11420.00	36.1 AV	54.0	-17.9	1.60 H	319	23.8	12.3
9	#17130.00	50.9 PK	68.2	-17.3	1.30 H	345	34.3	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

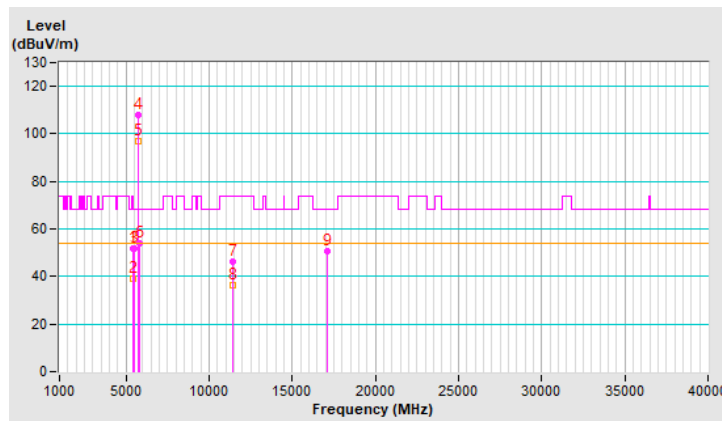


RF Mode	TX 802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.2 PK	74.0	-21.8	1.34 V	282	50.0	2.2
2	5460.00	39.5 AV	54.0	-14.5	1.34 V	282	37.3	2.2
3	#5470.00	52.3 PK	68.2	-15.9	1.34 V	282	50.1	2.2
4	*5710.00	118.3 PK			1.34 V	282	115.9	2.4
5	*5710.00	106.9 AV			1.34 V	282	104.5	2.4
6	#5850.00	61.6 PK	68.2	-6.6	1.34 V	282	58.7	2.9
7	11420.00	48.0 PK	74.0	-26.0	2.03 V	334	35.7	12.3
8	11420.00	35.1 AV	54.0	-18.9	2.03 V	334	22.8	12.3
9	#17130.00	51.3 PK	68.2	-16.9	2.04 V	284	34.7	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

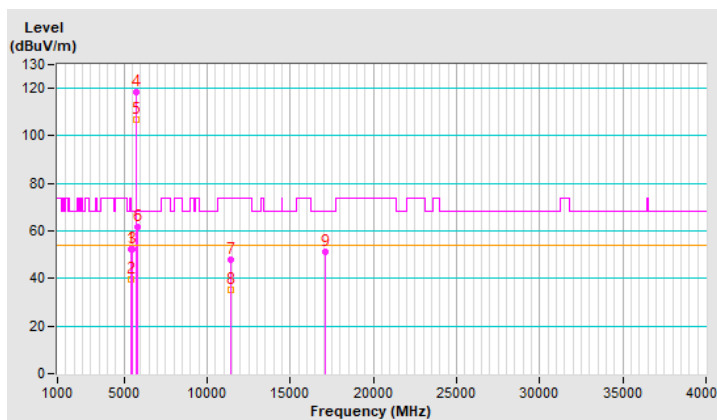


RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.96	52.4 PK	68.2	-15.8	1.11 H	150	50.1	2.3
2	*5755.00	108.4 PK			1.11 H	150	105.8	2.6
3	*5755.00	96.4 AV			1.11 H	150	93.8	2.6
4	#5936.12	51.3 PK	68.2	-16.9	1.11 H	150	48.4	2.9
5	11510.00	54.1 PK	74.0	-19.9	1.24 H	317	41.7	12.4
6	11510.00	42.3 AV	54.0	-11.7	1.24 H	317	29.9	12.4
7	#17265.00	50.6 PK	68.2	-17.6	1.44 H	278	33.8	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

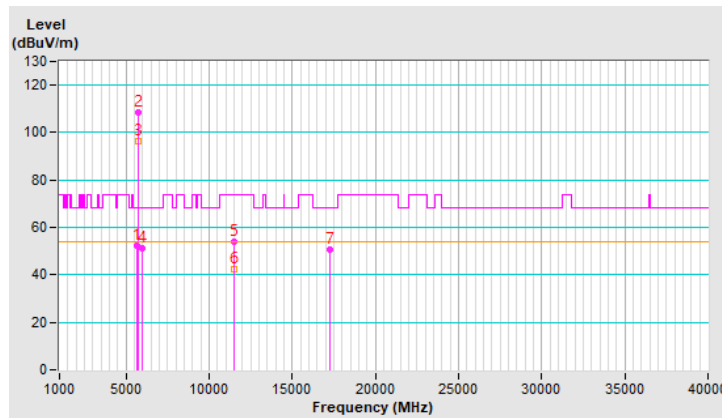




RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.66	63.9 PK	68.2	-4.3	1.52 V	271	61.6	2.3
2	*5755.00	120.4 PK			1.52 V	271	117.8	2.6
3	*5755.00	107.1 AV			1.52 V	271	104.5	2.6
4	#5925.90	55.7 PK	68.2	-12.5	1.52 V	271	52.8	2.9
5	11510.00	54.6 PK	74.0	-19.4	2.44 V	310	42.2	12.4
6	11510.00	42.9 AV	54.0	-11.1	2.44 V	310	30.5	12.4
7	#17265.00	50.6 PK	68.2	-17.6	2.68 V	80	33.8	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

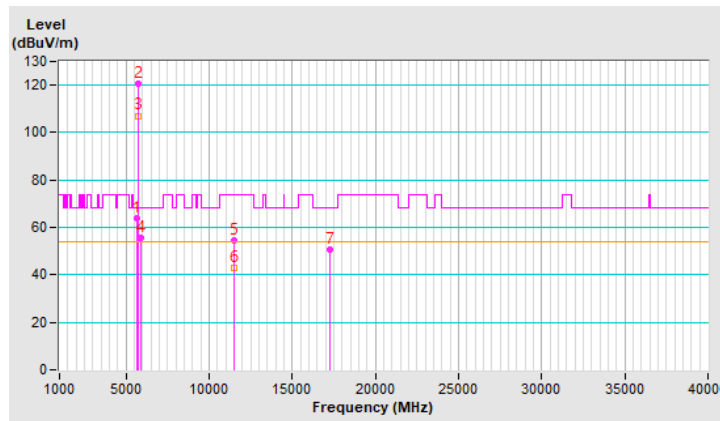


RF Mode	TX 802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.41	50.8 PK	68.2	-17.4	1.08 H	234	48.5	2.3
2	*5795.00	108.0 PK			1.08 H	234	105.3	2.7
3	*5795.00	96.3 AV			1.08 H	234	93.6	2.7
4	#5942.55	51.1 PK	68.2	-17.1	1.08 H	234	48.2	2.9
5	11590.00	53.6 PK	74.0	-20.4	1.21 H	329	41.3	12.3
6	11590.00	41.9 AV	54.0	-12.1	1.21 H	329	29.6	12.3
7	#17385.00	49.9 PK	68.2	-18.3	1.46 H	292	32.1	17.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

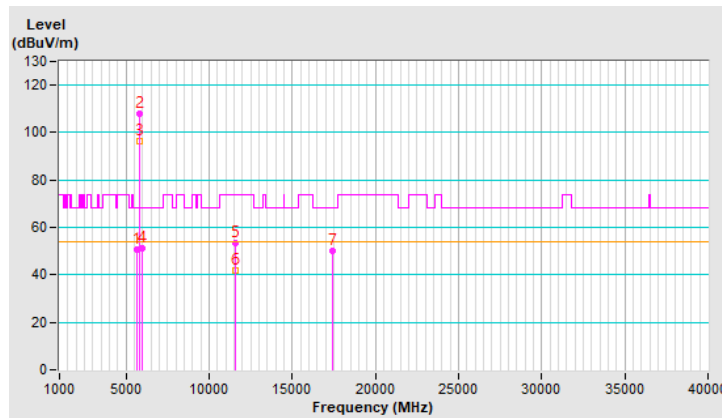


RF Mode	TX 802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	120.6 PK			1.48 V	260	117.9	2.7
2	*5795.00	107.3 AV			1.48 V	260	104.6	2.7
3	#5927.04	61.0 PK	68.2	-7.2	1.48 V	260	58.1	2.9
4	#5949.60	58.4 PK	68.2	-9.8	1.48 V	260	55.5	2.9
5	11590.00	54.8 PK	74.0	-19.2	2.47 V	304	42.5	12.3
6	11590.00	42.9 AV	54.0	-11.1	2.47 V	304	30.6	12.3
7	#17385.00	51.0 PK	68.2	-17.2	2.67 V	73	33.2	17.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

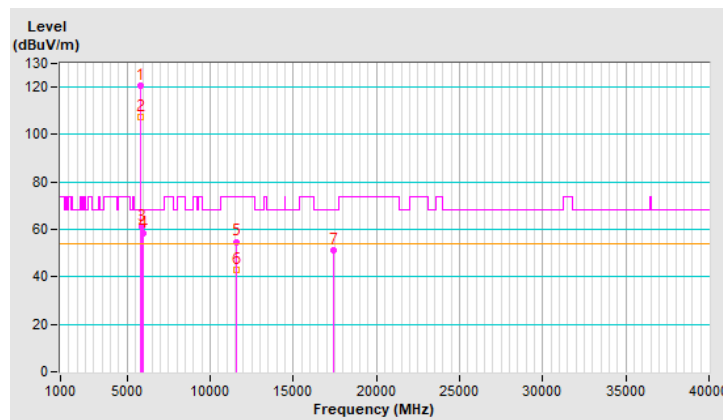


RF Mode	TX 802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.2 PK	74.0	-16.8	1.21 H	185	54.8	2.4
2	5150.00	44.5 AV	54.0	-9.5	1.21 H	185	42.1	2.4
3	*5210.00	95.9 PK			1.21 H	185	93.9	2.0
4	*5210.00	84.9 AV			1.21 H	185	82.9	2.0
5	5350.00	49.5 PK	74.0	-24.5	1.21 H	185	47.5	2.0
6	5350.00	38.2 AV	54.0	-15.8	1.21 H	185	36.2	2.0
7	#10420.00	49.6 PK	68.2	-18.6	1.18 H	337	37.6	12.0
8	15630.00	51.4 PK	74.0	-22.6	1.40 H	333	39.7	11.7
9	15630.00	39.2 AV	54.0	-14.8	1.40 H	333	27.5	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

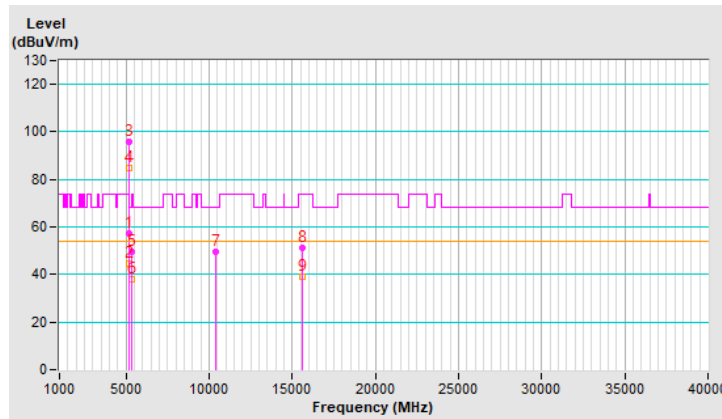


RF Mode	TX 802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.8 PK	74.0	-8.2	1.46 V	286	63.4	2.4
2	5150.00	52.4 AV	54.0	-1.6	1.46 V	286	50.0	2.4
3	*5210.00	106.6 PK			1.46 V	286	104.6	2.0
4	*5210.00	95.2 AV			1.46 V	286	93.2	2.0
5	5350.00	51.1 PK	74.0	-22.9	1.46 V	286	49.1	2.0
6	5350.00	39.4 AV	54.0	-14.6	1.46 V	286	37.4	2.0
7	#10420.00	49.6 PK	68.2	-18.6	2.48 V	198	37.6	12.0
8	15630.00	48.5 PK	74.0	-25.5	1.16 V	315	36.8	11.7
9	15630.00	35.6 AV	54.0	-18.4	1.16 V	315	23.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

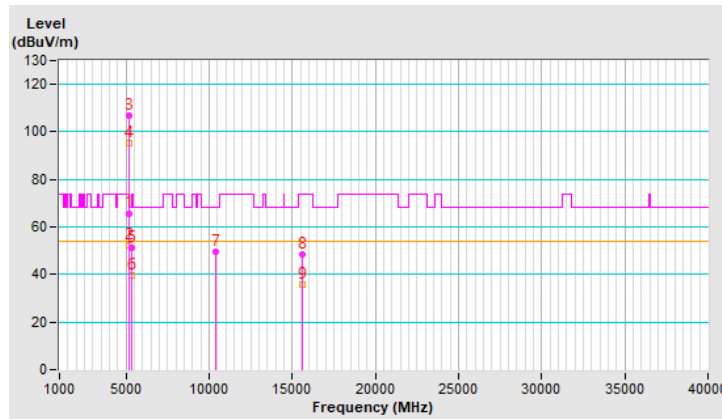


RF Mode	TX 802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5102.50	52.3 PK	74.0	-21.7	1.25 H	140	50.0	2.3
2	5102.50	39.7 AV	54.0	-14.3	1.25 H	140	37.4	2.3
3	*5290.00	97.3 PK			1.25 H	140	95.6	1.7
4	*5290.00	85.6 AV			1.25 H	140	83.9	1.7
5	5360.00	58.0 PK	74.0	-16.0	1.25 H	140	56.1	1.9
6	5360.00	43.2 AV	54.0	-10.8	1.25 H	140	41.3	1.9
7	#10580.00	45.9 PK	68.2	-22.3	1.60 H	323	34.2	11.7
8	15870.00	46.7 PK	74.0	-27.3	1.24 H	360	35.6	11.1
9	15870.00	34.5 AV	54.0	-19.5	1.24 H	360	23.4	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

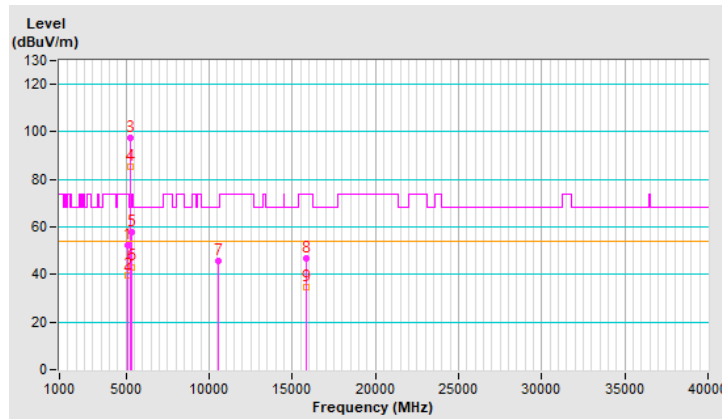


RF Mode	TX 802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.0 PK	74.0	-20.0	1.54 V	266	51.6	2.4
2	5150.00	41.3 AV	54.0	-12.7	1.54 V	266	38.9	2.4
3	*5290.00	107.5 PK			1.54 V	266	105.8	1.7
4	*5290.00	96.4 AV			1.54 V	266	94.7	1.7
5	5354.60	68.7 PK	74.0	-5.3	1.54 V	266	66.8	1.9
6	5354.60	52.5 AV	54.0	-1.5	1.54 V	266	50.6	1.9
7	#10580.00	47.9 PK	68.2	-20.3	1.68 V	173	36.2	11.7
8	15870.00	49.5 PK	74.0	-24.5	2.07 V	252	38.4	11.1
9	15870.00	38.3 AV	54.0	-15.7	2.07 V	252	27.2	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

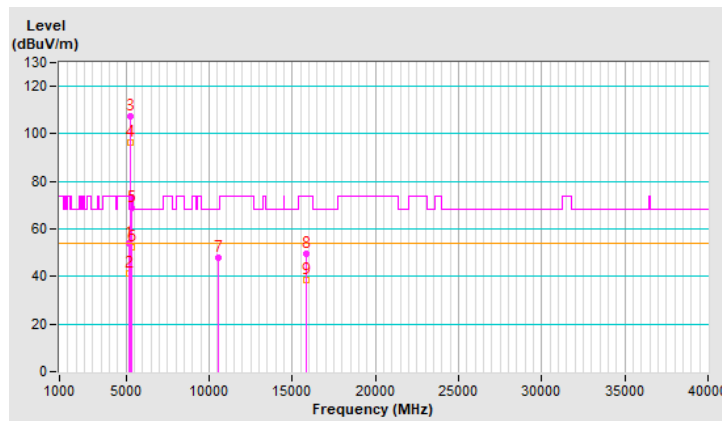


RF Mode	TX 802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.7 PK	74.0	-20.3	2.92 H	114	51.5	2.2
2	5460.00	41.5 AV	54.0	-12.5	2.92 H	114	39.3	2.2
3	#5467.50	54.0 PK	68.2	-14.2	2.92 H	114	51.8	2.2
4	*5530.00	96.9 PK			2.92 H	114	94.8	2.1
5	*5530.00	85.5 AV			2.92 H	114	83.4	2.1
6	#5794.00	50.9 PK	68.2	-17.3	2.92 H	114	48.2	2.7
7	11060.00	46.6 PK	74.0	-27.4	1.59 H	326	34.6	12.0
8	11060.00	35.9 AV	54.0	-18.1	1.59 H	326	23.9	12.0
9	#16590.00	47.0 PK	68.2	-21.2	1.26 H	360	32.7	14.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

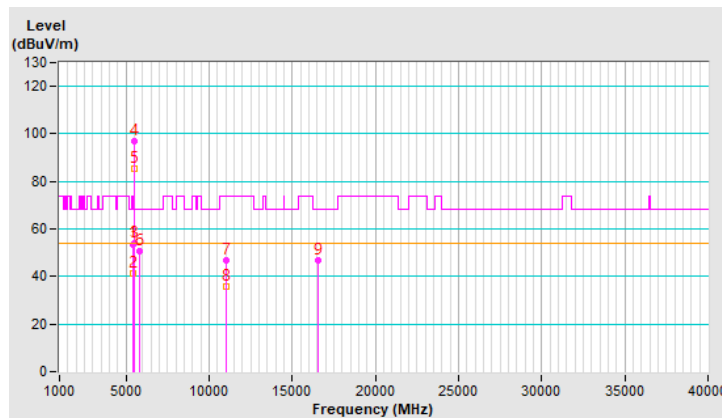


RF Mode	TX 802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.9 PK	74.0	-9.1	1.38 V	256	62.7	2.2
2	5460.00	50.7 AV	54.0	-3.3	1.38 V	256	48.5	2.2
3	#5470.00	66.4 PK	68.2	-1.8	1.38 V	256	64.2	2.2
4	*5530.00	105.8 PK			1.38 V	256	103.7	2.1
5	*5530.00	94.8 AV			1.38 V	256	92.7	2.1
6	#5822.50	51.4 PK	68.2	-16.8	1.38 V	256	48.6	2.8
7	11060.00	47.4 PK	74.0	-26.6	1.96 V	344	35.4	12.0
8	11060.00	35.0 AV	54.0	-19.0	1.96 V	344	23.0	12.0
9	#16590.00	50.6 PK	68.2	-17.6	2.02 V	277	36.3	14.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

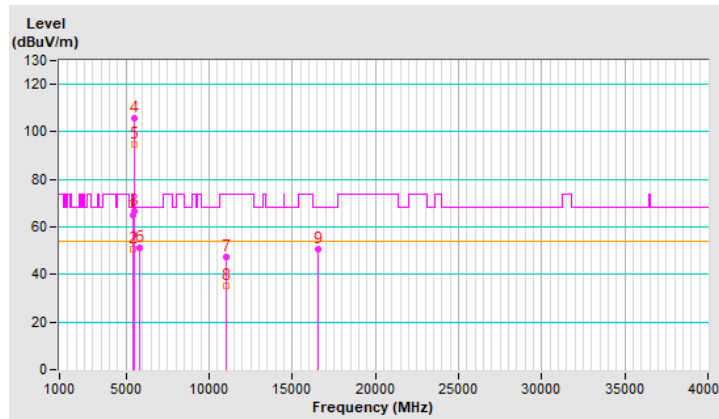


RF Mode	TX 802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5610.00	97.2 PK			2.91 H	125	95.0	2.2
2	*5610.00	85.7 AV			2.91 H	125	83.5	2.2
3	#5725.00	53.6 PK	68.2	-14.6	2.91 H	125	51.1	2.5
4	11220.00	46.9 PK	74.0	-27.1	1.56 H	317	34.8	12.1
5	11220.00	36.0 AV	54.0	-18.0	1.56 H	317	23.9	12.1
6	#16830.00	47.9 PK	68.2	-20.3	1.17 H	360	32.2	15.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

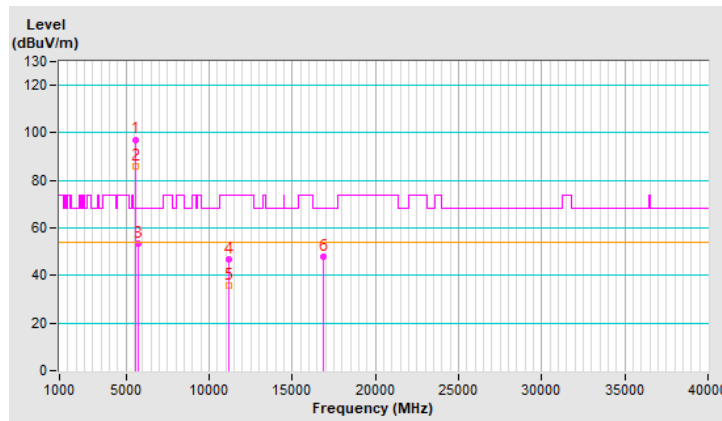


RF Mode	TX 802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	109.5 PK			1.49 V	260	107.3	2.2
2	*5610.00	98.4 AV			1.49 V	260	96.2	2.2
3	#5725.00	66.6 PK	68.2	-1.6	1.49 V	260	64.1	2.5
4	11220.00	47.1 PK	74.0	-26.9	1.91 V	330	35.0	12.1
5	11220.00	34.3 AV	54.0	-19.7	1.91 V	330	22.2	12.1
6	#16830.00	50.8 PK	68.2	-17.4	2.06 V	272	35.1	15.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

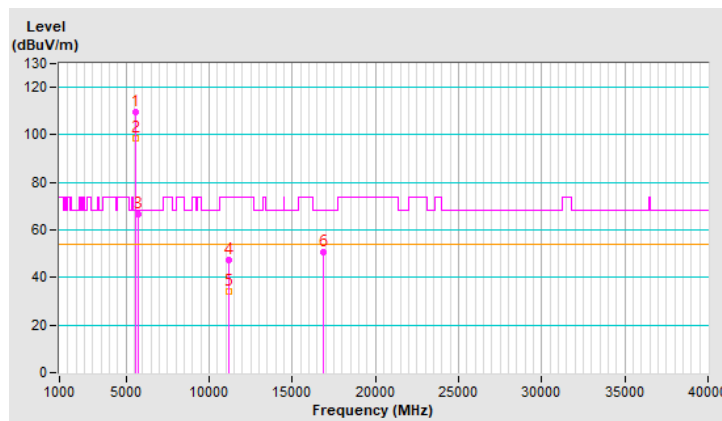


RF Mode	TX 802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.6 PK	74.0	-22.4	2.86 H	121	49.4	2.2
2	5460.00	38.9 AV	54.0	-15.1	2.86 H	121	36.7	2.2
3	#5470.00	53.4 PK	68.2	-14.8	2.86 H	121	51.2	2.2
4	*5690.00	98.5 PK			2.86 H	121	96.2	2.3
5	*5690.00	87.4 AV			2.86 H	121	85.1	2.3
6	#5850.00	55.2 PK	68.2	-13.0	2.86 H	121	52.3	2.9
7	11380.00	45.6 PK	74.0	-28.4	1.53 H	329	33.4	12.2
8	11380.00	35.0 AV	54.0	-19.0	1.53 H	329	22.8	12.2
9	#17070.00	47.2 PK	68.2	-21.0	1.24 H	360	30.6	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

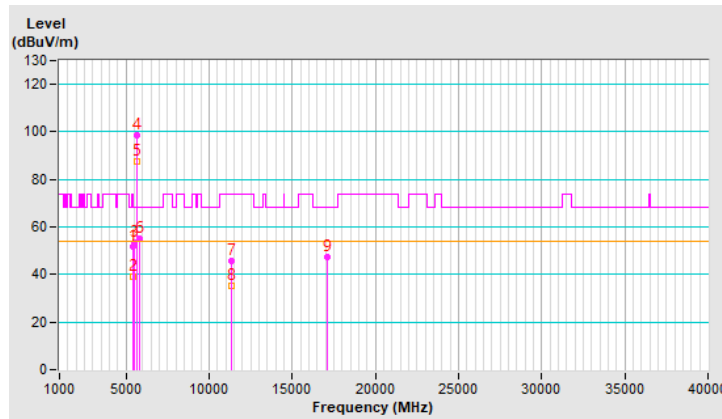


RF Mode	TX 802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.9 PK	74.0	-10.1	1.63 V	283	61.7	2.2
2	5460.00	41.6 AV	54.0	-12.4	1.63 V	283	39.4	2.2
3	#5470.00	64.2 PK	68.2	-4.0	1.63 V	283	62.0	2.2
4	*5690.00	112.3 PK			1.63 V	283	110.0	2.3
5	*5690.00	100.9 AV			1.63 V	283	98.6	2.3
6	#5850.00	66.4 PK	68.2	-1.8	1.63 V	283	63.5	2.9
7	11380.00	46.9 PK	74.0	-27.1	1.95 V	327	34.7	12.2
8	11380.00	34.1 AV	54.0	-19.9	1.95 V	327	21.9	12.2
9	#17070.00	50.7 PK	68.2	-17.5	2.08 V	286	34.1	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

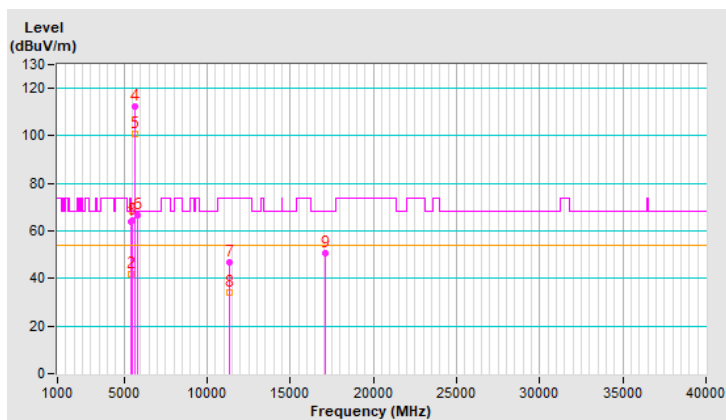


RF Mode	TX 802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5629.40	52.5 PK	68.2	-15.7	1.01 H	227	50.2	2.3
2	*5775.00	98.9 PK			1.01 H	227	96.3	2.6
3	*5775.00	87.7 AV			1.01 H	227	85.1	2.6
4	#5926.51	55.5 PK	68.2	-12.7	1.01 H	227	52.6	2.9
5	11550.00	54.0 PK	74.0	-20.0	1.25 H	333	41.7	12.3
6	11550.00	42.1 AV	54.0	-11.9	1.25 H	333	29.8	12.3
7	#17325.00	49.4 PK	68.2	-18.8	1.41 H	301	32.2	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

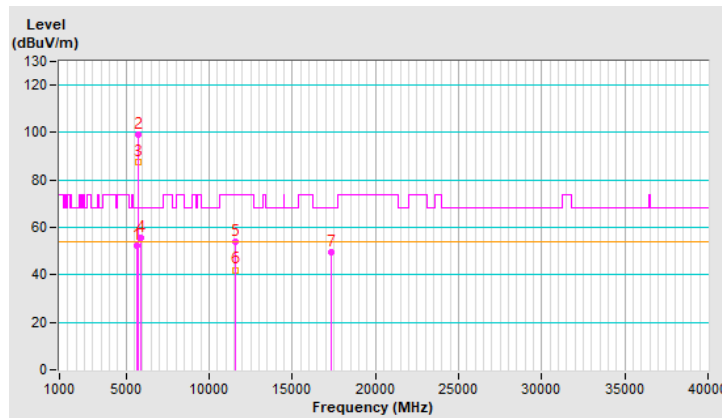


RF Mode	TX 802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.15	66.5 PK	68.2	-1.7	1.58 V	272	64.2	2.3
2	*5775.00	111.5 PK			1.58 V	272	108.9	2.6
3	*5775.00	100.2 AV			1.58 V	272	97.6	2.6
4	#5928.69	66.7 PK	68.2	-1.5	1.58 V	272	63.8	2.9
5	11550.00	54.4 PK	74.0	-19.6	2.49 V	298	42.1	12.3
6	11550.00	42.6 AV	54.0	-11.4	2.49 V	298	30.3	12.3
7	#17325.00	50.1 PK	68.2	-18.1	2.65 V	90	32.9	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

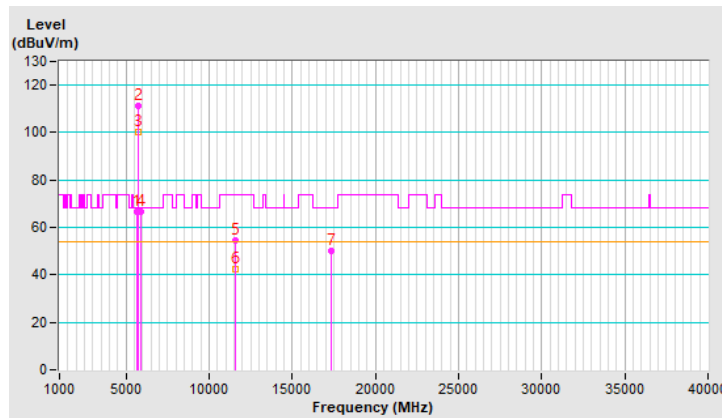


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5138.28	53.9 PK	74.0	-20.1	1.01 H	145	51.5	2.4
2	5138.28	42.7 AV	54.0	-11.3	1.01 H	145	40.3	2.4
3	*5180.00	115.3 PK			1.01 H	145	113.1	2.2
4	*5180.00	105.5 AV			1.01 H	145	103.3	2.2
5	#10360.00	53.3 PK	68.2	-14.9	2.10 H	339	41.6	11.7
6	15540.00	57.8 PK	74.0	-16.2	1.61 H	57	46.0	11.8
7	15540.00	46.1 AV	54.0	-7.9	1.61 H	57	34.3	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

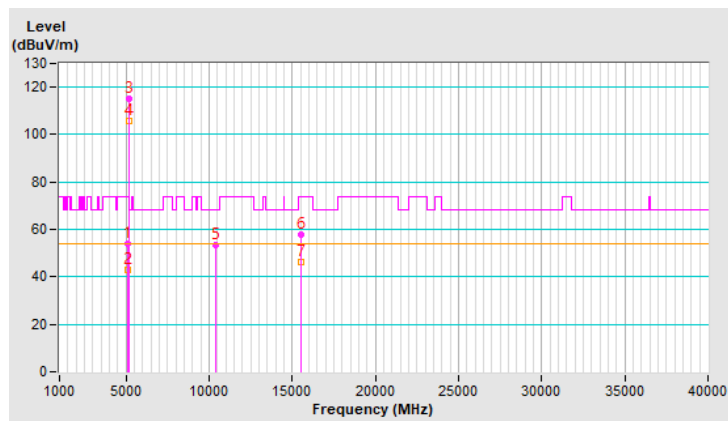


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5137.80	59.2 PK	74.0	-14.8	1.50 V	296	56.8	2.4
2	5137.80	46.7 AV	54.0	-7.3	1.50 V	296	44.3	2.4
3	5144.10	63.1 PK	74.0	-10.9	1.50 V	296	60.7	2.4
4	5144.10	43.1 AV	54.0	-10.9	1.50 V	296	40.7	2.4
5	*5180.00	124.3 PK			1.50 V	296	122.1	2.2
6	*5180.00	114.2 AV			1.50 V	296	112.0	2.2
7	#10360.00	49.8 PK	68.2	-18.4	1.96 V	298	38.1	11.7
8	15540.00	49.5 PK	74.0	-24.5	1.56 V	315	37.7	11.8
9	15540.00	39.7 AV	54.0	-14.3	1.56 V	315	27.9	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

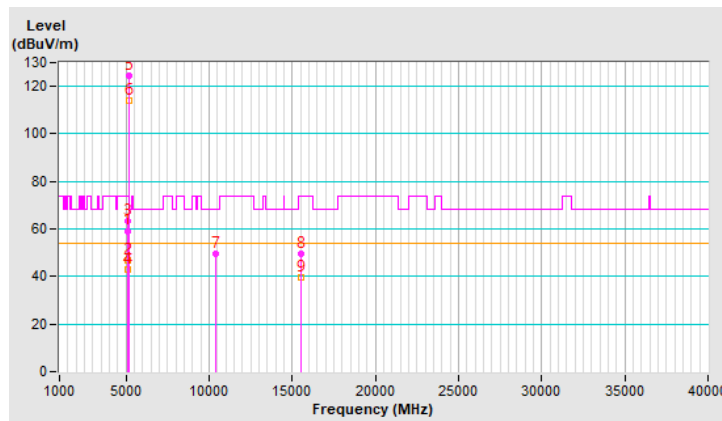


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	115.5 PK			1.00 H	131	113.4	2.1
2	*5200.00	105.8 AV			1.00 H	131	103.7	2.1
3	#10400.00	53.2 PK	68.2	-15.0	2.11 H	336	41.3	11.9
4	15600.00	57.9 PK	74.0	-16.1	1.63 H	58	46.4	11.5
5	15600.00	46.2 AV	54.0	-7.8	1.63 H	58	34.7	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

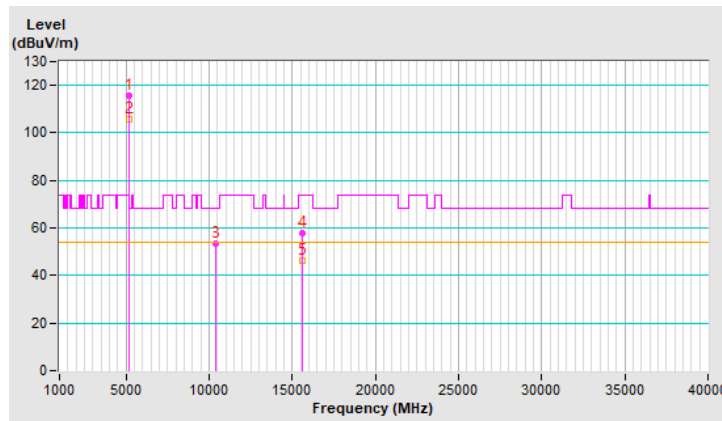


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	124.8 PK			1.45 V	296	122.7	2.1
2	*5200.00	114.5 AV			1.45 V	296	112.4	2.1
3	#10400.00	49.8 PK	68.2	-18.4	1.95 V	304	37.9	11.9
4	15600.00	49.2 PK	74.0	-24.8	1.57 V	320	37.7	11.5
5	15600.00	39.3 AV	54.0	-14.7	1.57 V	320	27.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

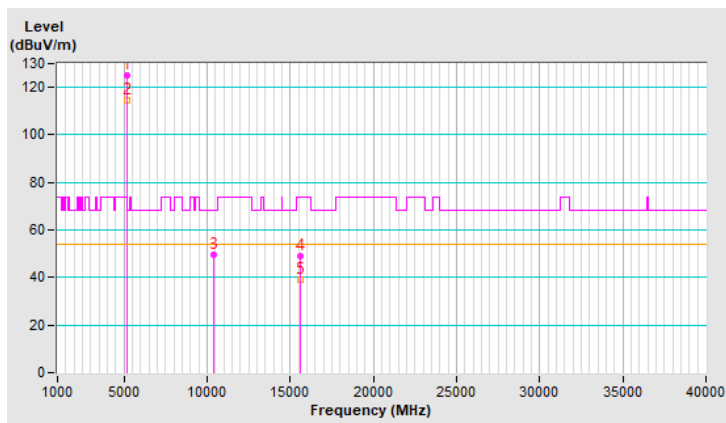


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5240.00	115.0 PK			1.00 H	136	113.1	1.9
2	*5240.00	105.4 AV			1.00 H	136	103.5	1.9
3	#10480.00	53.1 PK	68.2	-15.1	2.16 H	323	41.2	11.9
4	15720.00	57.8 PK	74.0	-16.2	1.57 H	66	46.1	11.7
5	15720.00	46.1 AV	54.0	-7.9	1.57 H	66	34.4	11.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

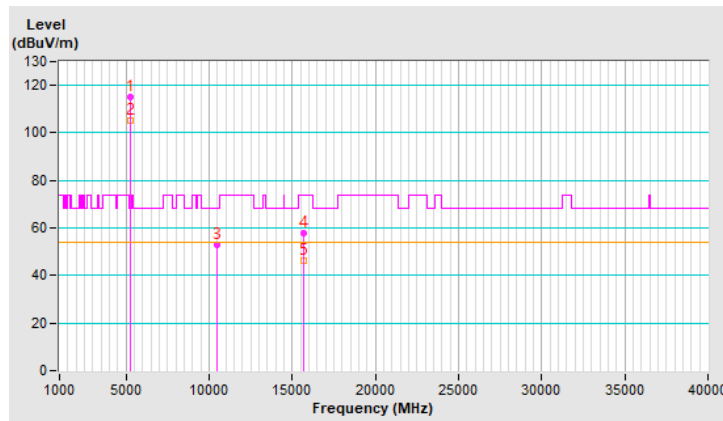




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5240.00	124.2 PK			1.46 V	310	122.3	1.9
2	*5240.00	114.0 AV			1.46 V	310	112.1	1.9
3	#10480.00	50.0 PK	68.2	-18.2	1.94 V	304	38.1	11.9
4	15720.00	49.4 PK	74.0	-24.6	1.55 V	300	37.7	11.7
5	15720.00	39.9 AV	54.0	-14.1	1.55 V	300	28.2	11.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

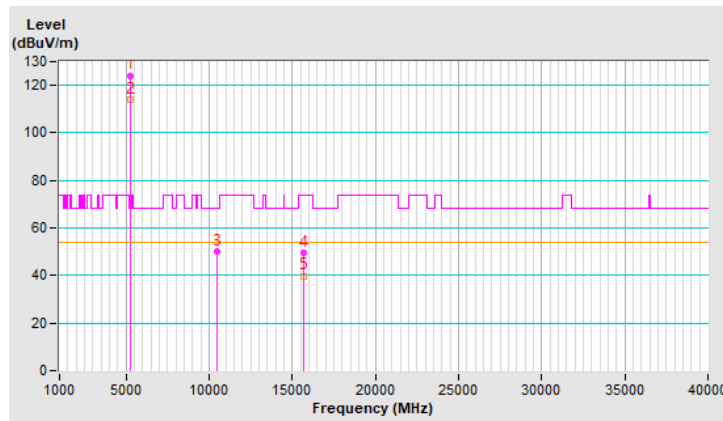


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	115.0 PK			1.04 H	131	113.2	1.8
2	*5260.00	105.1 AV			1.04 H	131	103.3	1.8
3	#10520.00	53.7 PK	68.2	-14.5	2.13 H	348	41.7	12.0
4	15780.00	58.5 PK	74.0	-15.5	1.63 H	69	47.0	11.5
5	15780.00	46.5 AV	54.0	-7.5	1.63 H	69	35.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

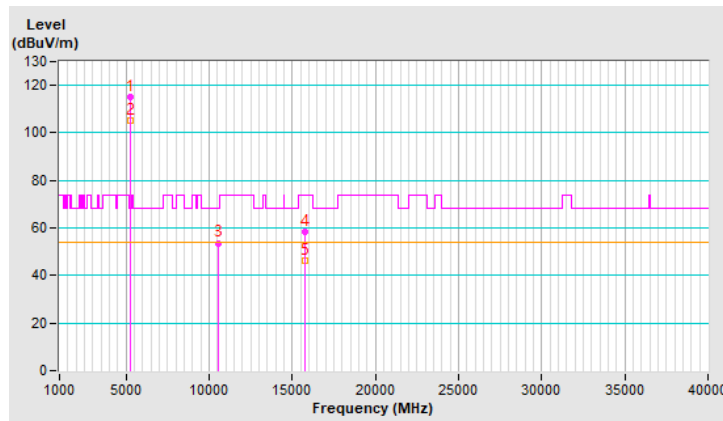


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5260.00	124.9 PK			1.51 V	301	123.1	1.8
2	*5260.00	114.6 AV			1.51 V	301	112.8	1.8
3	#10520.00	49.2 PK	68.2	-19.0	1.94 V	288	37.2	12.0
4	15780.00	49.9 PK	74.0	-24.1	1.56 V	327	38.4	11.5
5	15780.00	39.8 AV	54.0	-14.2	1.56 V	327	28.3	11.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

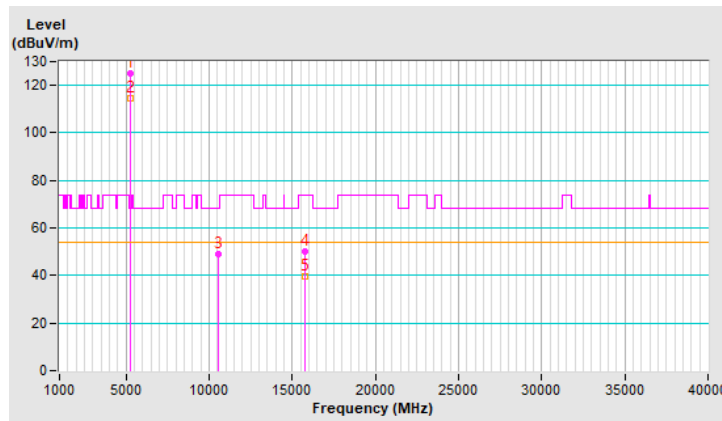


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	115.3 PK			1.06 H	156	113.6	1.7
2	*5300.00	105.2 AV			1.06 H	156	103.5	1.7
3	10600.00	53.0 PK	74.0	-21.0	2.13 H	349	41.3	11.7
4	10600.00	42.4 AV	54.0	-11.6	2.13 H	349	30.7	11.7
5	15900.00	58.1 PK	74.0	-15.9	1.61 H	45	47.0	11.1
6	15900.00	46.5 AV	54.0	-7.5	1.61 H	45	35.4	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

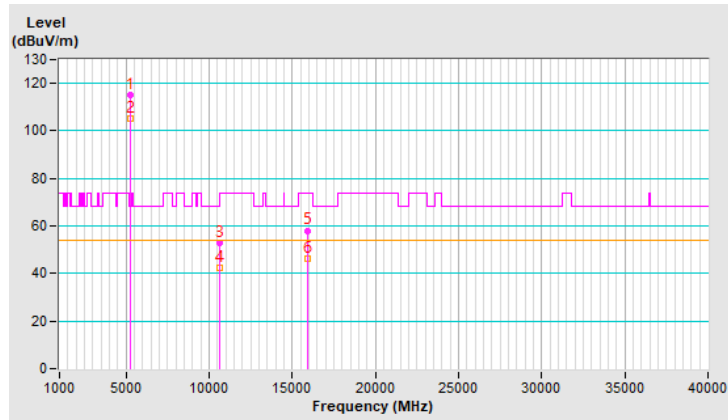


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5300.00	124.1 PK			1.46 V	293	122.4	1.7
2	*5300.00	114.2 AV			1.46 V	293	112.5	1.7
3	10600.00	49.8 PK	74.0	-24.2	1.91 V	308	38.1	11.7
4	10600.00	39.1 AV	54.0	-14.9	1.91 V	308	27.4	11.7
5	15900.00	49.7 PK	74.0	-24.3	1.59 V	302	38.6	11.1
6	15900.00	40.1 AV	54.0	-13.9	1.59 V	302	29.0	11.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

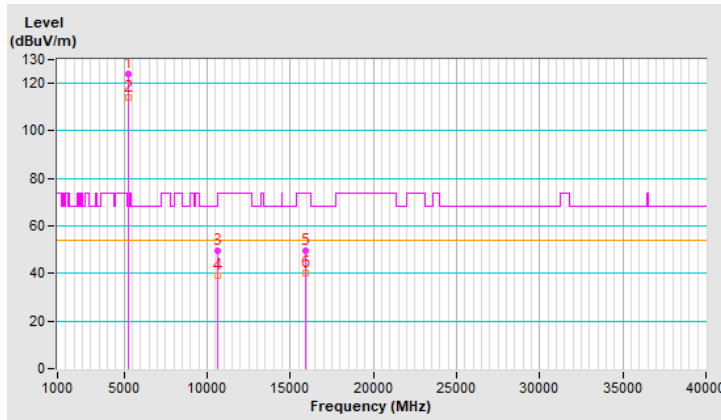


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.2 PK			1.02 H	179	113.5	1.7
2	*5320.00	105.0 AV			1.02 H	179	103.3	1.7
3	5367.86	48.8 PK	74.0	-25.2	1.02 H	179	46.9	1.9
4	5367.86	39.7 AV	54.0	-14.3	1.02 H	179	37.8	1.9
5	10640.00	53.7 PK	74.0	-20.3	2.04 H	335	42.1	11.6
6	10640.00	43.0 AV	54.0	-11.0	2.04 H	335	31.4	11.6
7	15960.00	58.1 PK	74.0	-15.9	1.67 H	68	46.7	11.4
8	15960.00	46.5 AV	54.0	-7.5	1.67 H	68	35.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

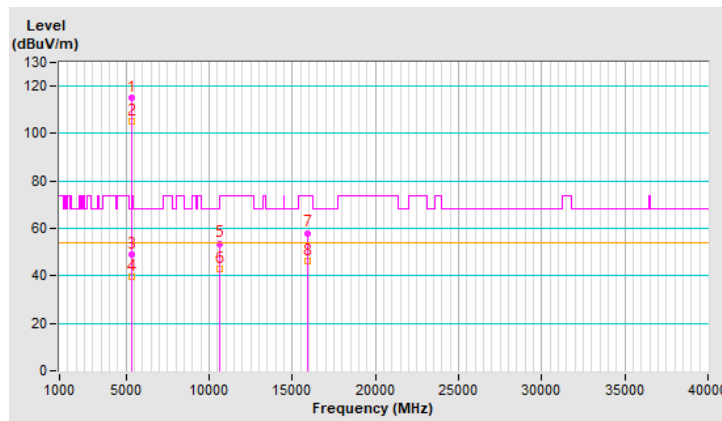


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	124.1 PK			1.37 V	272	122.4	1.7
2	*5320.00	114.9 AV			1.37 V	272	113.2	1.7
3	5360.90	62.7 PK	74.0	-11.3	1.37 V	272	60.8	1.9
4	5360.90	46.1 AV	54.0	-7.9	1.37 V	272	44.2	1.9
5	5368.20	56.2 PK	74.0	-17.8	1.37 V	272	54.3	1.9
6	5368.20	47.1 AV	54.0	-6.9	1.37 V	272	45.2	1.9
7	10640.00	50.3 PK	74.0	-23.7	2.01 V	300	38.7	11.6
8	10640.00	39.1 AV	54.0	-14.9	2.01 V	300	27.5	11.6
9	15960.00	49.6 PK	74.0	-24.4	1.61 V	311	38.2	11.4
10	15960.00	39.8 AV	54.0	-14.2	1.61 V	311	28.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

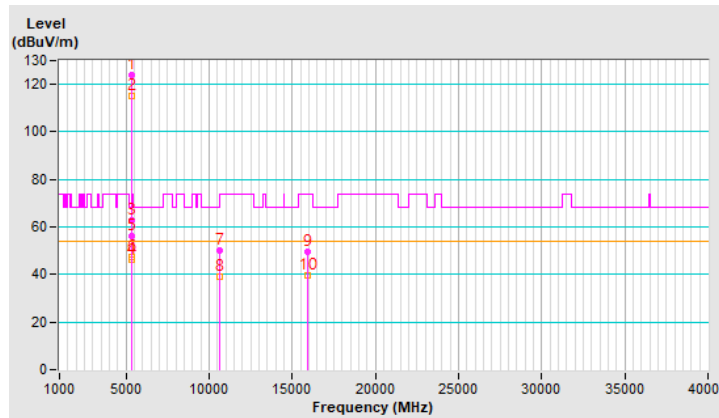


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5458.23	56.0 PK	74.0	-18.0	1.05 H	144	53.8	2.2
2	5458.23	40.0 AV	54.0	-14.0	1.05 H	144	37.8	2.2
3	#5468.01	51.3 PK	68.2	-16.9	1.05 H	144	49.1	2.2
4	*5500.00	115.7 PK			1.05 H	144	113.6	2.1
5	*5500.00	105.5 AV			1.05 H	144	103.4	2.1
6	11000.00	53.2 PK	74.0	-20.8	2.07 H	327	41.1	12.1
7	11000.00	42.5 AV	54.0	-11.5	2.07 H	327	30.4	12.1
8	#16500.00	58.0 PK	68.2	-10.2	1.62 H	64	44.6	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

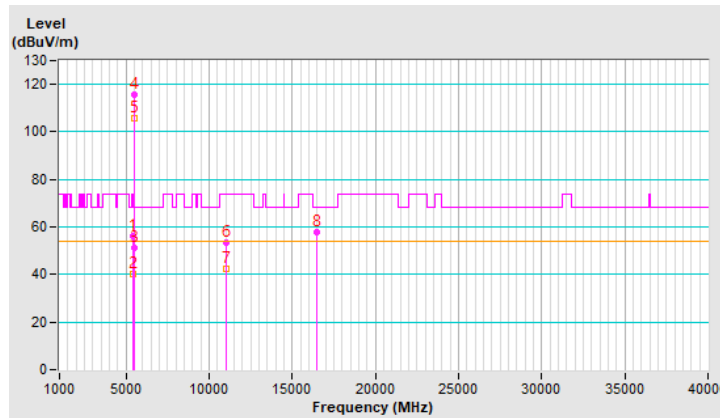




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5457.70	69.5 PK	74.0	-4.5	1.27 V	245	67.3	2.2
2	5457.70	46.3 AV	54.0	-7.7	1.27 V	245	44.1	2.2
3	#5466.40	66.7 PK	68.2	-1.5	1.27 V	245	64.5	2.2
4	*5500.00	125.0 PK			1.27 V	245	122.9	2.1
5	*5500.00	115.7 AV			1.27 V	245	113.6	2.1
6	11000.00	49.7 PK	74.0	-24.3	1.94 V	290	37.6	12.1
7	11000.00	38.8 AV	54.0	-15.2	1.94 V	290	26.7	12.1
8	#16500.00	49.9 PK	68.2	-18.3	1.53 V	305	36.5	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

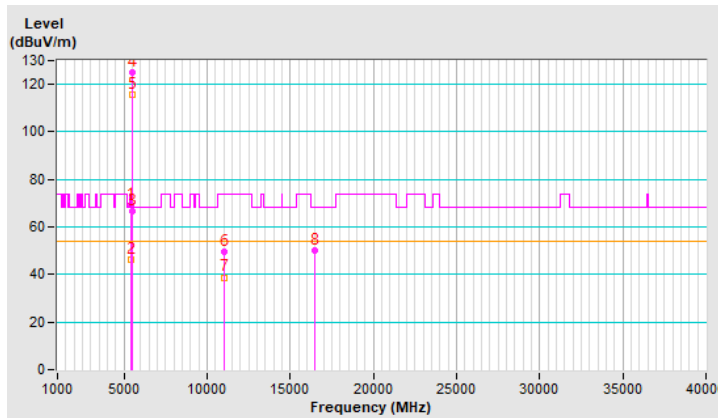


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	115.6 PK			1.02 H	137	113.4	2.2
2	*5580.00	106.0 AV			1.02 H	137	103.8	2.2
3	11160.00	53.2 PK	74.0	-20.8	2.06 H	347	41.3	11.9
4	11160.00	42.8 AV	54.0	-11.2	2.06 H	347	30.9	11.9
5	#16740.00	58.2 PK	68.2	-10.0	1.59 H	55	43.0	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

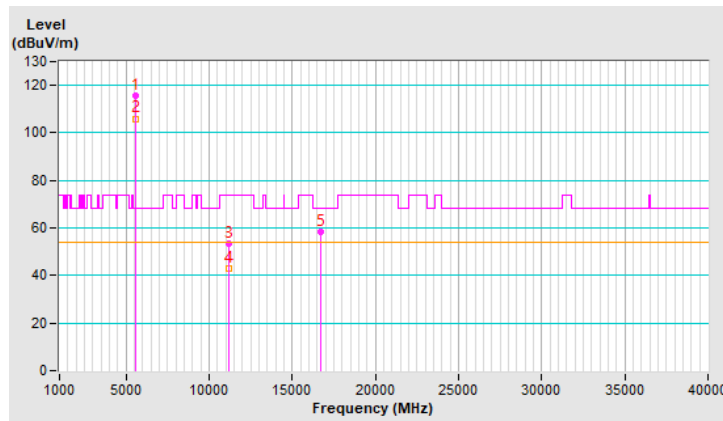


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	123.8 PK			1.40 V	270	121.6	2.2
2	*5580.00	114.8 AV			1.40 V	270	112.6	2.2
3	11160.00	50.1 PK	74.0	-23.9	2.01 V	293	38.2	11.9
4	11160.00	39.0 AV	54.0	-15.0	2.01 V	293	27.1	11.9
5	#16740.00	49.1 PK	68.2	-19.1	1.52 V	330	33.9	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

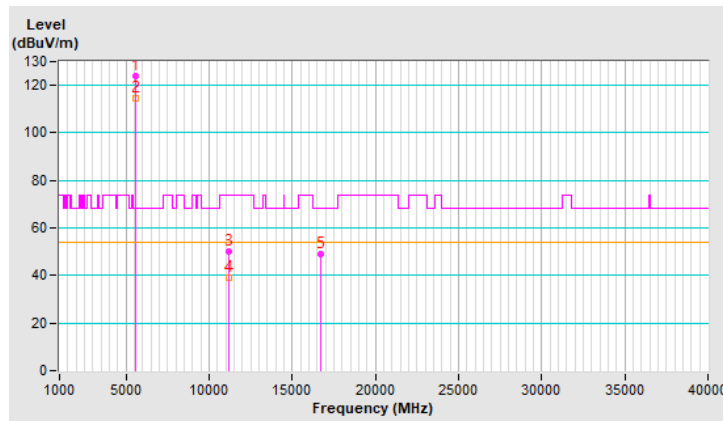


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.7 PK			1.04 H	155	110.4	2.3
2	*5700.00	102.4 AV			1.04 H	155	100.1	2.3
3	#5725.00	62.3 PK	68.2	-5.9	1.04 H	155	59.8	2.5
4	11400.00	53.3 PK	74.0	-20.7	2.06 H	326	41.1	12.2
5	11400.00	42.5 AV	54.0	-11.5	2.06 H	326	30.3	12.2
6	#17100.00	58.2 PK	68.2	-10.0	1.66 H	72	41.6	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

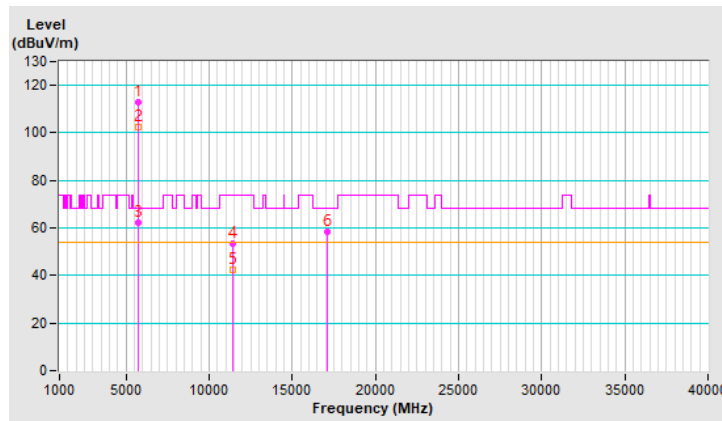




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	122.8 PK			1.36 V	275	120.5	2.3
2	*5700.00	112.6 AV			1.36 V	275	110.3	2.3
3	#5725.00	66.3 PK	68.2	-1.9	1.36 V	275	63.8	2.5
4	11400.00	50.0 PK	74.0	-24.0	1.99 V	283	37.8	12.2
5	11400.00	39.2 AV	54.0	-14.8	1.99 V	283	27.0	12.2
6	#17100.00	49.9 PK	68.2	-18.3	1.56 V	313	33.3	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

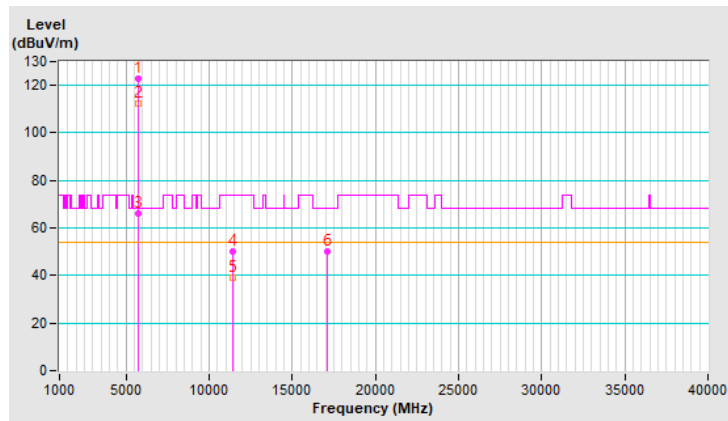


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.9 PK	74.0	-23.1	1.03 H	158	48.7	2.2
2	5460.00	39.0 AV	54.0	-15.0	1.03 H	158	36.8	2.2
3	#5470.00	51.6 PK	68.2	-16.6	1.03 H	158	49.4	2.2
4	*5720.00	114.9 PK			1.03 H	158	112.5	2.4
5	*5720.00	105.2 AV			1.03 H	158	102.8	2.4
6	#5850.00	51.2 PK	68.2	-17.0	1.03 H	158	48.3	2.9
7	11440.00	53.2 PK	74.0	-20.8	2.06 H	345	41.0	12.2
8	11440.00	42.7 AV	54.0	-11.3	2.06 H	345	30.5	12.2
9	#17160.00	57.4 PK	68.2	-10.8	1.62 H	71	40.9	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

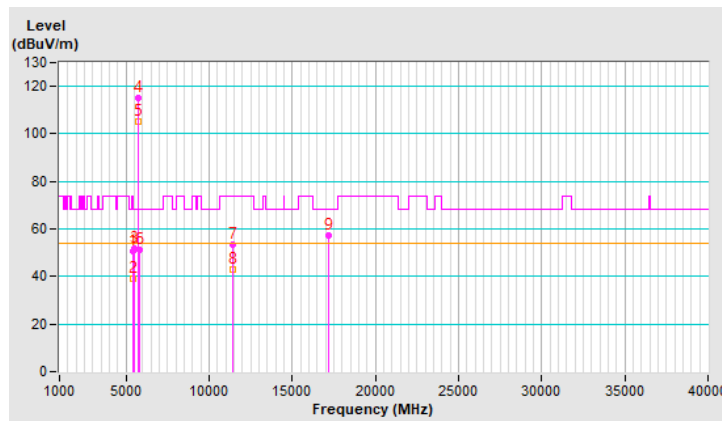


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.1 PK	74.0	-22.9	1.35 V	281	48.9	2.2
2	5460.00	39.2 AV	54.0	-14.8	1.35 V	281	37.0	2.2
3	#5470.00	52.3 PK	68.2	-15.9	1.35 V	281	50.1	2.2
4	*5720.00	124.4 PK			1.35 V	281	122.0	2.4
5	*5720.00	115.4 AV			1.35 V	281	113.0	2.4
6	#5850.00	51.8 PK	68.2	-16.4	1.35 V	281	48.9	2.9
7	11440.00	49.4 PK	74.0	-24.6	1.92 V	286	37.2	12.2
8	11440.00	38.4 AV	54.0	-15.6	1.92 V	286	26.2	12.2
9	#17160.00	49.1 PK	68.2	-19.1	1.51 V	304	32.6	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

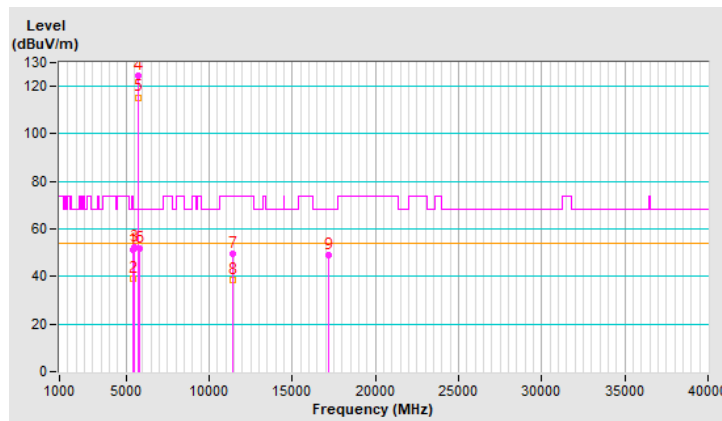




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5581.61	50.7 PK	68.2	-17.5	1.01 H	148	48.5	2.2
2	*5745.00	115.4 PK			1.01 H	148	112.9	2.5
3	*5745.00	105.5 AV			1.01 H	148	103.0	2.5
4	#5943.88	50.0 PK	68.2	-18.2	1.01 H	148	47.1	2.9
5	11490.00	53.1 PK	74.0	-20.9	2.07 H	345	40.7	12.4
6	11490.00	42.4 AV	54.0	-11.6	2.07 H	345	30.0	12.4
7	#17235.00	57.7 PK	68.2	-10.5	1.66 H	43	41.0	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

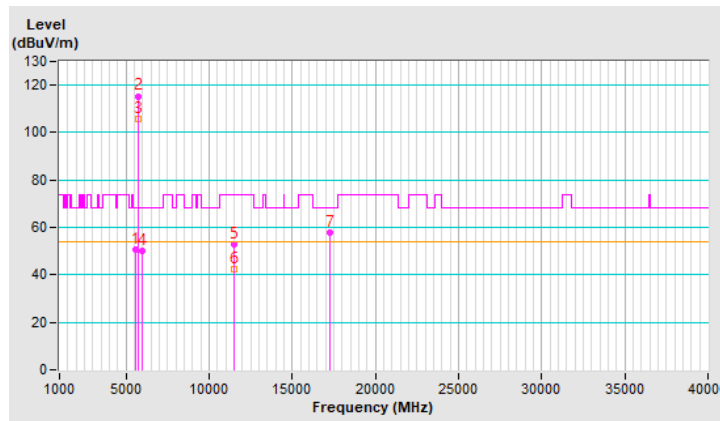




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5605.94	52.2 PK	68.2	-16.0	1.35 V	271	50.0	2.2
2	*5745.00	126.5 PK			1.35 V	271	124.0	2.5
3	*5745.00	116.3 AV			1.35 V	271	113.8	2.5
4	#5943.24	50.5 PK	68.2	-17.7	1.35 V	271	47.6	2.9
5	11490.00	49.3 PK	74.0	-24.7	1.96 V	299	36.9	12.4
6	11490.00	38.4 AV	54.0	-15.6	1.96 V	299	26.0	12.4
7	#17235.00	48.9 PK	68.2	-19.3	1.56 V	329	32.2	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

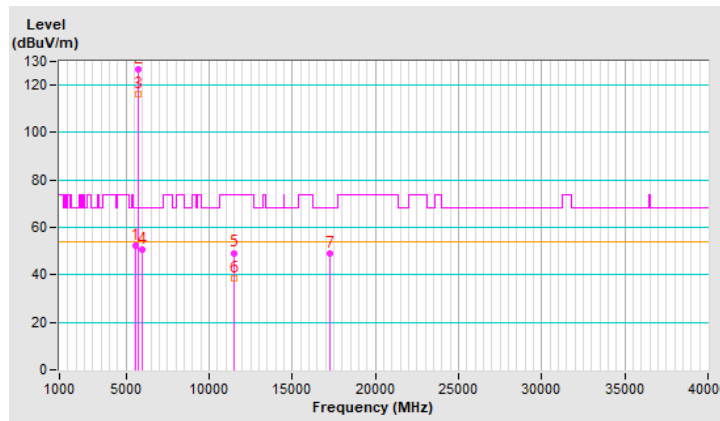


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5553.78	50.9 PK	68.2	-17.3	1.03 H	149	48.7	2.2
2	*5785.00	115.9 PK			1.03 H	149	113.2	2.7
3	*5785.00	105.8 AV			1.03 H	149	103.1	2.7
4	#6018.62	50.5 PK	68.2	-17.7	1.03 H	149	47.5	3.0
5	11570.00	53.8 PK	74.0	-20.2	2.05 H	334	41.4	12.4
6	11570.00	43.0 AV	54.0	-11.0	2.05 H	334	30.6	12.4
7	#17355.00	58.4 PK	68.2	-9.8	1.65 H	54	40.8	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

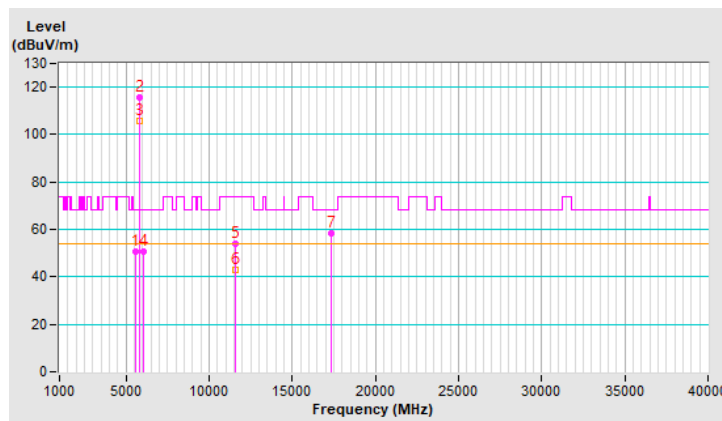


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5560.94	51.3 PK	68.2	-16.9	1.34 V	273	49.1	2.2
2	*5785.00	126.9 PK			1.34 V	273	124.2	2.7
3	*5785.00	116.7 AV			1.34 V	273	114.0	2.7
4	#5926.16	51.2 PK	68.2	-17.0	1.34 V	273	48.3	2.9
5	11570.00	49.7 PK	74.0	-24.3	2.01 V	313	37.3	12.4
6	11570.00	38.8 AV	54.0	-15.2	2.01 V	313	26.4	12.4
7	#17355.00	49.2 PK	68.2	-19.0	1.58 V	312	31.6	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

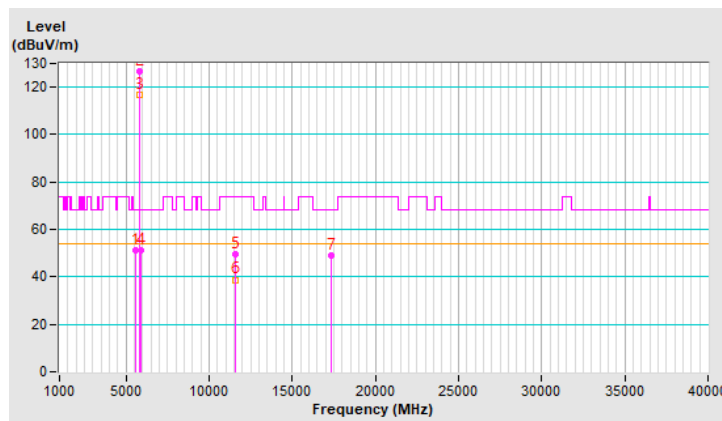




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5617.75	50.0 PK	68.2	-18.2	1.00 H	150	47.8	2.2
2	*5825.00	116.4 PK			1.00 H	150	113.6	2.8
3	*5825.00	107.0 AV			1.00 H	150	104.2	2.8
4	#5948.63	50.1 PK	68.2	-18.1	1.00 H	150	47.2	2.9
5	11650.00	52.9 PK	74.0	-21.1	2.12 H	342	41.0	11.9
6	11650.00	42.2 AV	54.0	-11.8	2.12 H	342	30.3	11.9
7	#17475.00	57.1 PK	68.2	-11.1	1.60 H	44	38.6	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

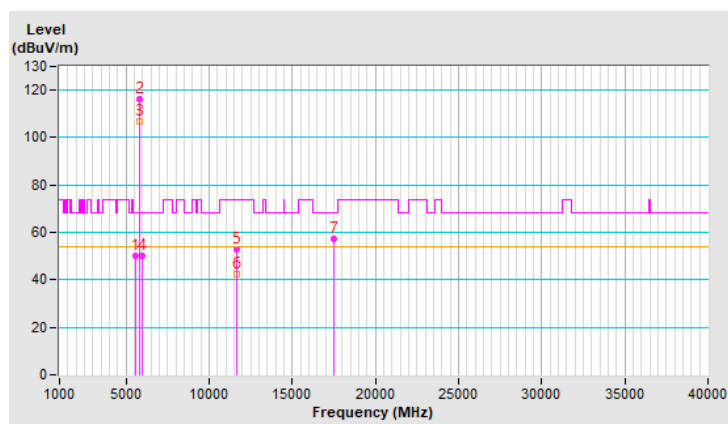




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5605.27	51.0 PK	68.2	-17.2	1.31 V	278	48.8	2.2
2	*5825.00	126.7 PK			1.31 V	278	123.9	2.8
3	*5825.00	116.6 AV			1.31 V	278	113.8	2.8
4	#5932.16	51.4 PK	68.2	-16.8	1.31 V	278	48.5	2.9
5	11650.00	49.6 PK	74.0	-24.4	1.99 V	305	37.7	11.9
6	11650.00	38.4 AV	54.0	-15.6	1.99 V	305	26.5	11.9
7	#17475.00	49.6 PK	68.2	-18.6	1.54 V	303	31.1	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

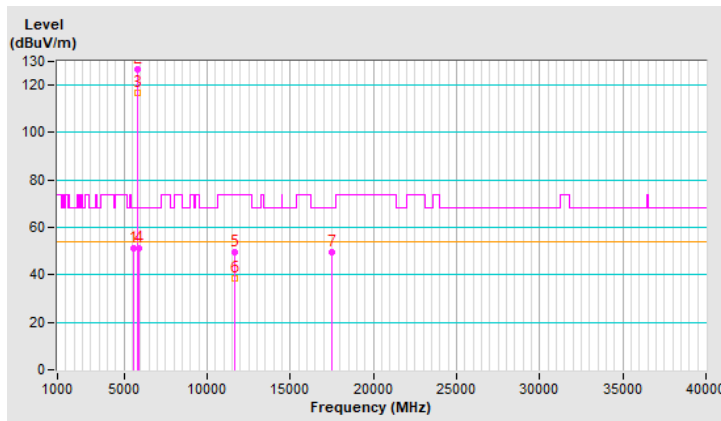




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.0 PK	74.0	-13.0	1.14 H	144	58.6	2.4
2	5150.00	42.4 AV	54.0	-11.6	1.14 H	144	40.0	2.4
3	*5180.00	114.1 PK			1.14 H	144	111.9	2.2
4	*5180.00	104.3 AV			1.14 H	144	102.1	2.2
5	#10360.00	53.2 PK	68.2	-15.0	2.15 H	349	41.5	11.7
6	15540.00	58.4 PK	74.0	-15.6	1.56 H	69	46.6	11.8
7	15540.00	46.5 AV	54.0	-7.5	1.56 H	69	34.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

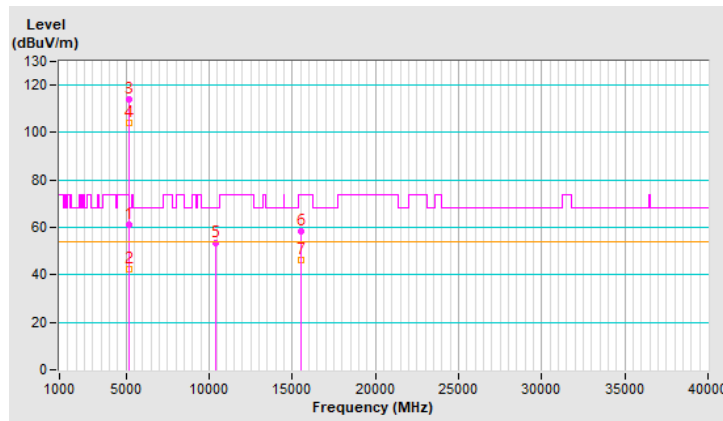


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5146.20	69.4 PK	74.0	-4.6	1.41 V	295	67.0	2.4
2	5146.20	46.4 AV	54.0	-7.6	1.41 V	295	44.0	2.4
3	5150.00	57.3 PK	74.0	-16.7	1.41 V	295	54.9	2.4
4	5150.00	47.2 AV	54.0	-6.8	1.41 V	295	44.8	2.4
5	*5180.00	123.4 PK			1.41 V	295	121.2	2.2
6	*5180.00	112.9 AV			1.41 V	295	110.7	2.2
7	#10360.00	50.0 PK	68.2	-18.2	1.99 V	310	38.3	11.7
8	15540.00	49.7 PK	74.0	-24.3	1.52 V	306	37.9	11.8
9	15540.00	39.7 AV	54.0	-14.3	1.52 V	306	27.9	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

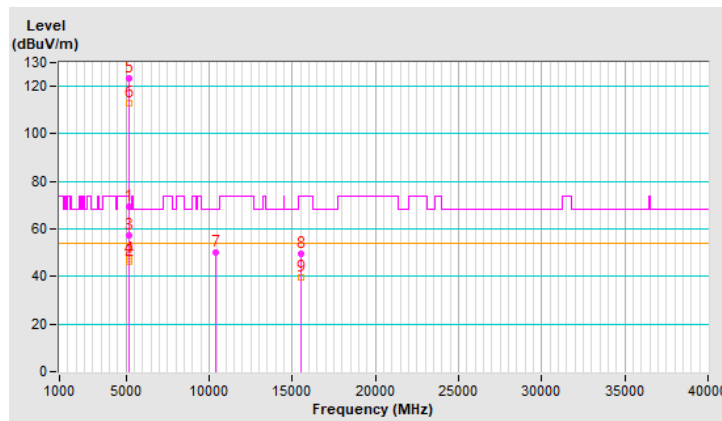


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	115.3 PK			1.19 H	181	113.2	2.1
2	*5200.00	105.1 AV			1.19 H	181	103.0	2.1
3	#10400.00	52.9 PK	68.2	-15.3	2.18 H	360	41.0	11.9
4	15600.00	58.7 PK	74.0	-15.3	1.58 H	63	47.2	11.5
5	15600.00	46.9 AV	54.0	-7.1	1.58 H	63	35.4	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

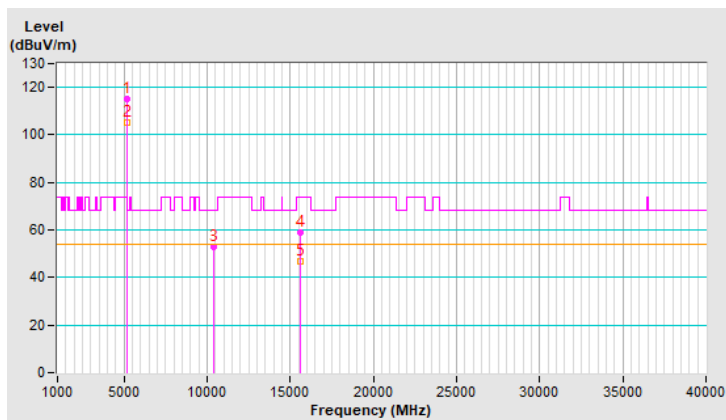




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	124.0 PK			1.45 V	240	121.9	2.1
2	*5200.00	114.0 AV			1.45 V	240	111.9	2.1
3	#10400.00	50.0 PK	68.2	-18.2	2.02 V	312	38.1	11.9
4	15600.00	49.8 PK	74.0	-24.2	1.53 V	295	38.3	11.5
5	15600.00	39.7 AV	54.0	-14.3	1.53 V	295	28.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

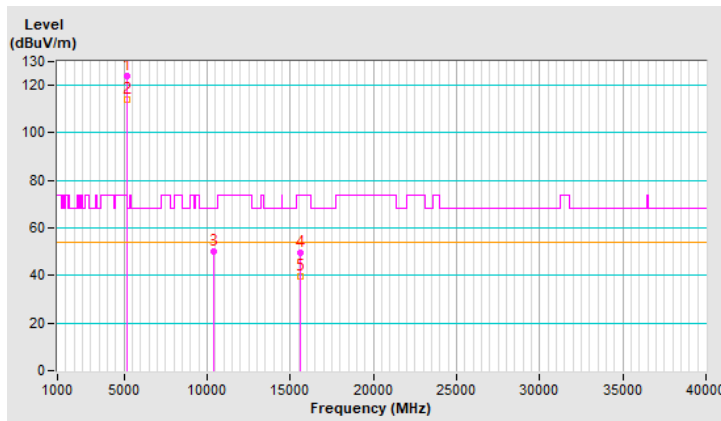




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	114.6 PK			1.10 H	174	112.7	1.9
2	*5240.00	104.6 AV			1.10 H	174	102.7	1.9
3	#10480.00	53.1 PK	68.2	-15.1	2.14 H	356	41.2	11.9
4	15720.00	59.1 PK	74.0	-14.9	1.50 H	83	47.4	11.7
5	15720.00	47.0 AV	54.0	-7.0	1.50 H	83	35.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

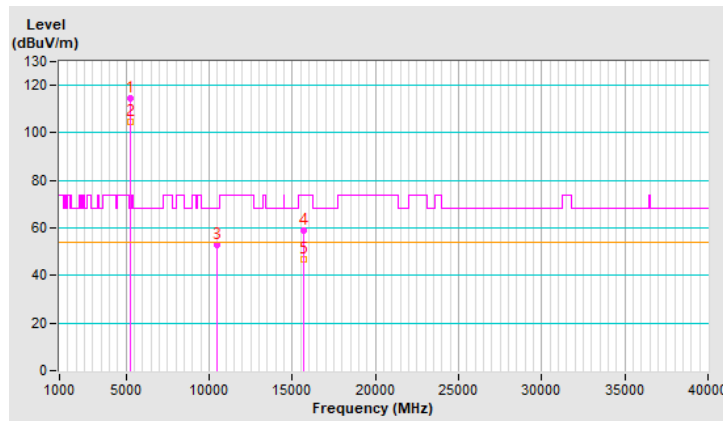




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	123.8 PK			1.43 V	230	121.9	1.9
2	*5240.00	113.7 AV			1.43 V	230	111.8	1.9
3	#10480.00	49.8 PK	68.2	-18.4	2.04 V	316	37.9	11.9
4	15720.00	49.1 PK	74.0	-24.9	1.54 V	293	37.4	11.7
5	15720.00	39.2 AV	54.0	-14.8	1.54 V	293	27.5	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

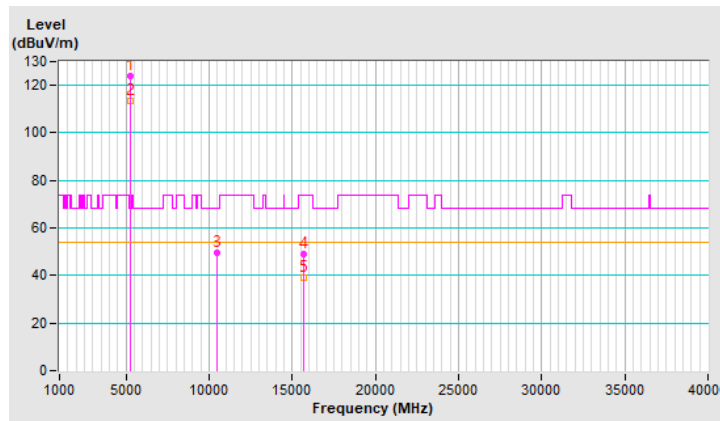


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	114.9 PK			1.08 H	196	113.1	1.8
2	*5260.00	104.9 AV			1.08 H	196	103.1	1.8
3	#10520.00	52.7 PK	68.2	-15.5	2.18 H	348	40.7	12.0
4	15780.00	59.1 PK	74.0	-14.9	1.50 H	61	47.6	11.5
5	15780.00	46.9 AV	54.0	-7.1	1.50 H	61	35.4	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

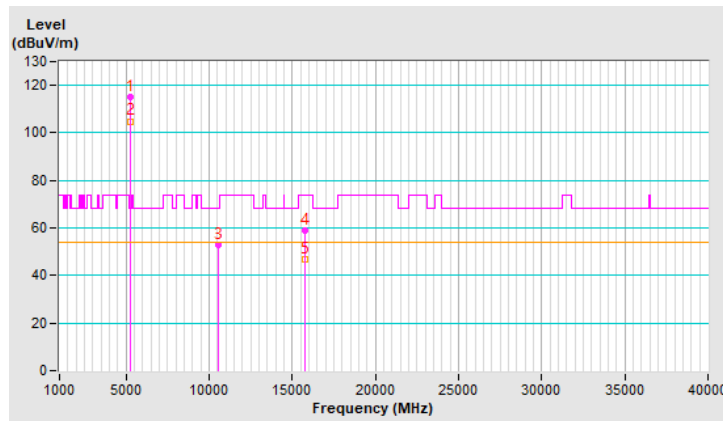




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5260.00	123.7 PK			1.34 V	247	121.9	1.8
2	*5260.00	114.0 AV			1.34 V	247	112.2	1.8
3	#10520.00	49.5 PK	68.2	-18.7	1.98 V	320	37.5	12.0
4	15780.00	50.0 PK	74.0	-24.0	1.47 V	305	38.5	11.5
5	15780.00	39.8 AV	54.0	-14.2	1.47 V	305	28.3	11.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

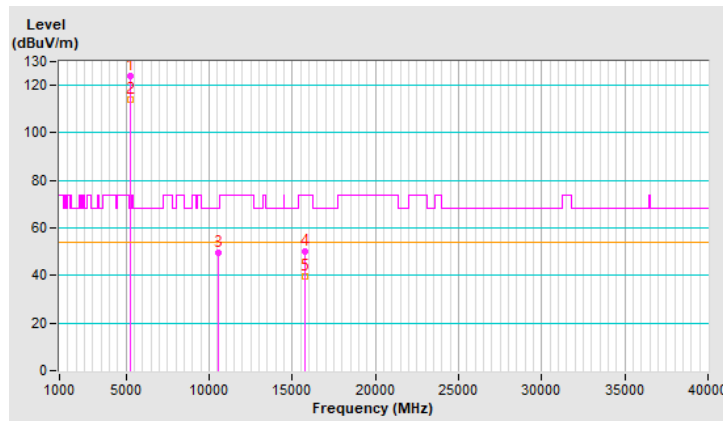


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	115.3 PK			1.12 H	185	113.6	1.7
2	*5300.00	105.3 AV			1.12 H	185	103.6	1.7
3	10600.00	53.3 PK	74.0	-20.7	2.16 H	337	41.6	11.7
4	10600.00	42.7 AV	54.0	-11.3	2.16 H	337	31.0	11.7
5	15900.00	58.5 PK	74.0	-15.5	1.58 H	58	47.4	11.1
6	15900.00	46.4 AV	54.0	-7.6	1.58 H	58	35.3	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

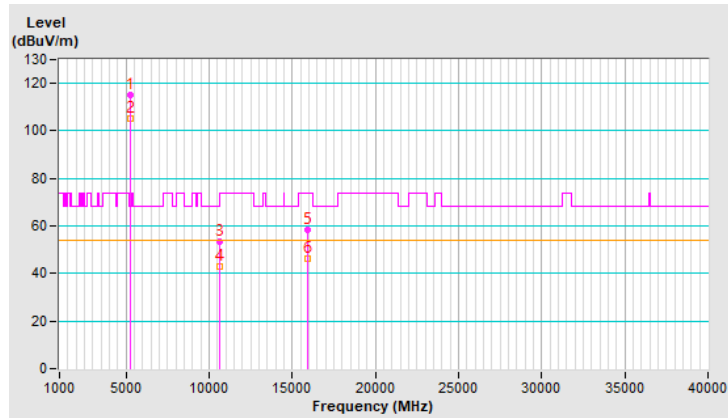


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5300.00	123.1 PK			1.38 V	244	121.4	1.7
2	*5300.00	113.6 AV			1.38 V	244	111.9	1.7
3	10600.00	49.7 PK	74.0	-24.3	1.97 V	316	38.0	11.7
4	10600.00	38.7 AV	54.0	-15.3	1.97 V	316	27.0	11.7
5	15900.00	49.4 PK	74.0	-24.6	1.54 V	305	38.3	11.1
6	15900.00	39.5 AV	54.0	-14.5	1.54 V	305	28.4	11.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

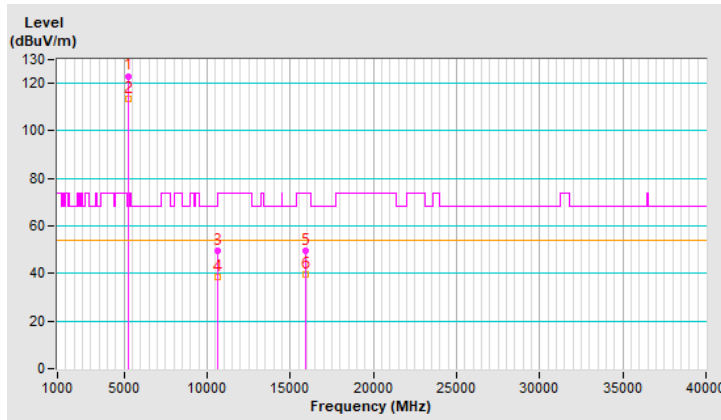


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.0 PK			1.13 H	184	113.3	1.7
2	*5320.00	104.9 AV			1.13 H	184	103.2	1.7
3	5356.44	63.9 PK	74.0	-10.1	1.13 H	184	62.0	1.9
4	5356.44	42.8 AV	54.0	-11.2	1.13 H	184	40.9	1.9
5	10640.00	53.1 PK	74.0	-20.9	2.19 H	345	41.5	11.6
6	10640.00	42.2 AV	54.0	-11.8	2.19 H	345	30.6	11.6
7	15960.00	58.3 PK	74.0	-15.7	1.56 H	83	46.9	11.4
8	15960.00	46.5 AV	54.0	-7.5	1.56 H	83	35.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

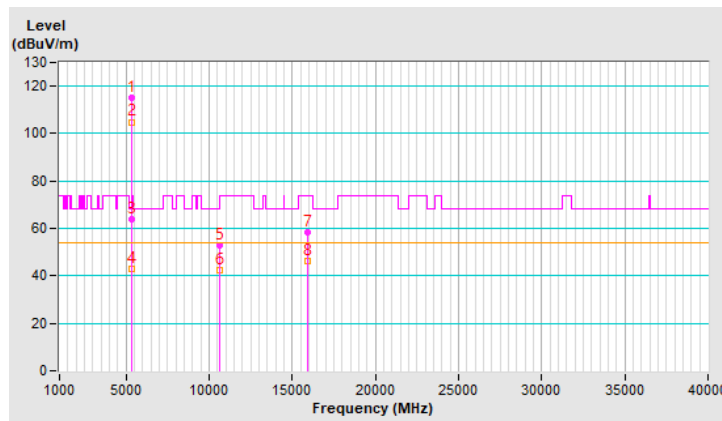


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	123.5 PK			1.39 V	236	121.8	1.7
2	*5320.00	113.7 AV			1.39 V	236	112.0	1.7
3	5350.00	68.6 PK	74.0	-5.4	1.39 V	236	66.6	2.0
4	5350.00	48.0 AV	54.0	-6.0	1.39 V	236	46.0	2.0
5	5356.00	63.8 PK	74.0	-10.2	1.39 V	236	61.9	1.9
6	5356.00	50.6 AV	54.0	-3.4	1.39 V	236	48.7	1.9
7	10640.00	50.5 PK	74.0	-23.5	1.95 V	295	38.9	11.6
8	10640.00	39.3 AV	54.0	-14.7	1.95 V	295	27.7	11.6
9	15960.00	49.5 PK	74.0	-24.5	1.52 V	305	38.1	11.4
10	15960.00	39.3 AV	54.0	-14.7	1.52 V	305	27.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

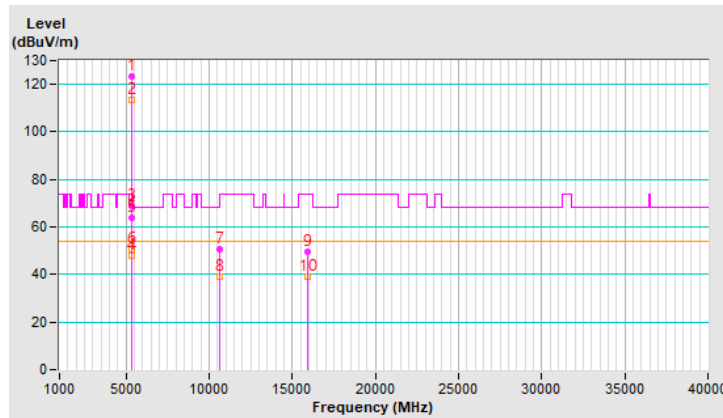


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5453.06	49.4 PK	74.0	-24.6	1.12 H	151	47.2	2.2
2	5453.06	39.6 AV	54.0	-14.4	1.12 H	151	37.4	2.2
3	#5463.24	62.3 PK	68.2	-5.9	1.12 H	151	60.1	2.2
4	*5500.00	113.0 PK			1.12 H	151	110.9	2.1
5	*5500.00	103.0 AV			1.12 H	151	100.9	2.1
6	11000.00	53.3 PK	74.0	-20.7	2.17 H	351	41.2	12.1
7	11000.00	42.8 AV	54.0	-11.2	2.17 H	351	30.7	12.1
8	#16500.00	58.1 PK	68.2	-10.1	1.60 H	66	44.7	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

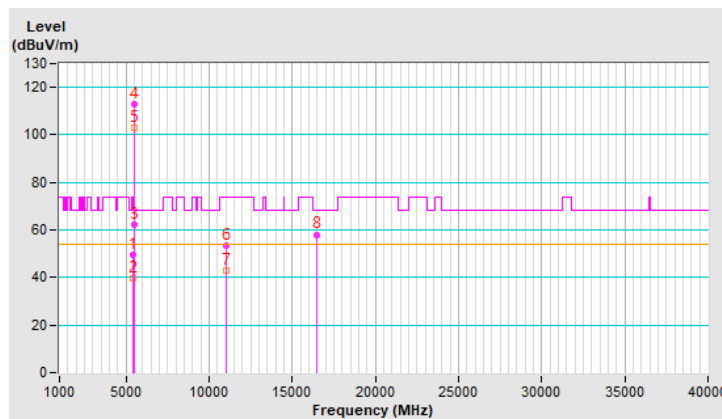


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5451.30	56.2 PK	74.0	-17.8	1.21 V	241	54.0	2.2
2	5451.30	45.7 AV	54.0	-8.3	1.21 V	241	43.5	2.2
3	5460.00	61.3 PK	74.0	-12.7	1.21 V	241	59.1	2.2
4	5460.00	43.4 AV	54.0	-10.6	1.21 V	241	41.2	2.2
5	#5462.30	65.9 PK	68.2	-2.3	1.21 V	241	63.7	2.2
6	*5500.00	122.7 PK			1.21 V	241	120.6	2.1
7	*5500.00	112.5 AV			1.21 V	241	110.4	2.1
8	11000.00	49.9 PK	74.0	-24.1	2.05 V	301	37.8	12.1
9	11000.00	39.1 AV	54.0	-14.9	2.05 V	301	27.0	12.1
10	#16500.00	49.4 PK	68.2	-18.8	1.53 V	301	36.0	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

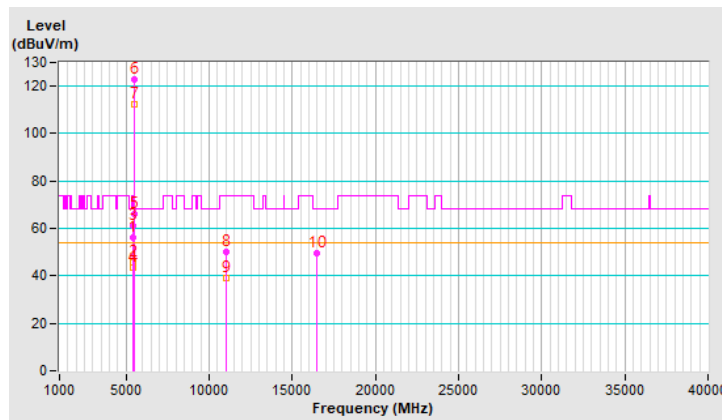


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	114.6 PK			1.05 H	137	112.4	2.2
2	*5580.00	104.5 AV			1.05 H	137	102.3	2.2
3	11160.00	53.0 PK	74.0	-21.0	2.11 H	360	41.1	11.9
4	11160.00	42.4 AV	54.0	-11.6	2.11 H	360	30.5	11.9
5	#16740.00	59.2 PK	68.2	-9.0	1.61 H	71	44.0	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

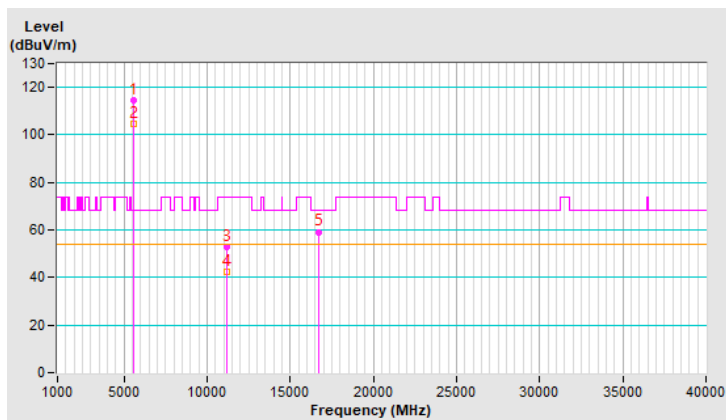




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5580.00	124.1 PK			1.38 V	232	121.9	2.2
2	*5580.00	114.1 AV			1.38 V	232	111.9	2.2
3	11160.00	49.9 PK	74.0	-24.1	1.96 V	317	38.0	11.9
4	11160.00	38.8 AV	54.0	-15.2	1.96 V	317	26.9	11.9
5	#16740.00	49.5 PK	68.2	-18.7	1.48 V	291	34.3	15.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

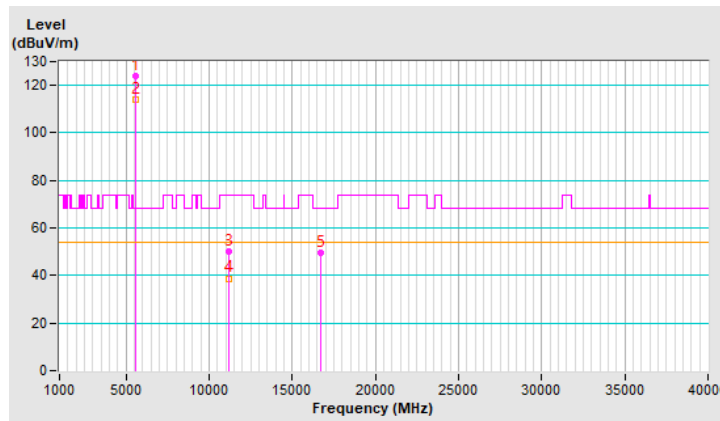


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	111.9 PK			1.15 H	188	109.6	2.3
2	*5700.00	101.7 AV			1.15 H	188	99.4	2.3
3	#5725.00	62.2 PK	68.2	-6.0	1.15 H	188	59.7	2.5
4	11400.00	52.9 PK	74.0	-21.1	2.16 H	338	40.7	12.2
5	11400.00	42.5 AV	54.0	-11.5	2.16 H	338	30.3	12.2
6	#17100.00	58.6 PK	68.2	-9.6	1.61 H	58	42.0	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

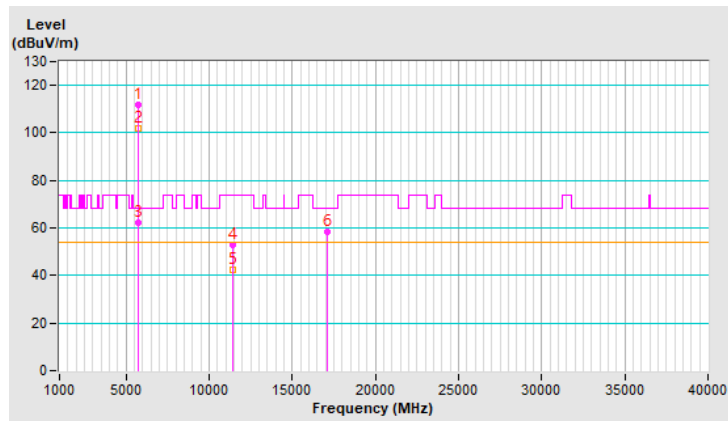


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	121.7 PK			1.43 V	273	119.4	2.3
2	*5700.00	111.4 AV			1.43 V	273	109.1	2.3
3	#5725.00	66.4 PK	68.2	-1.8	1.43 V	273	63.9	2.5
4	11400.00	50.4 PK	74.0	-23.6	1.99 V	322	38.2	12.2
5	11400.00	39.4 AV	54.0	-14.6	1.99 V	322	27.2	12.2
6	#17100.00	49.4 PK	68.2	-18.8	1.48 V	304	32.8	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

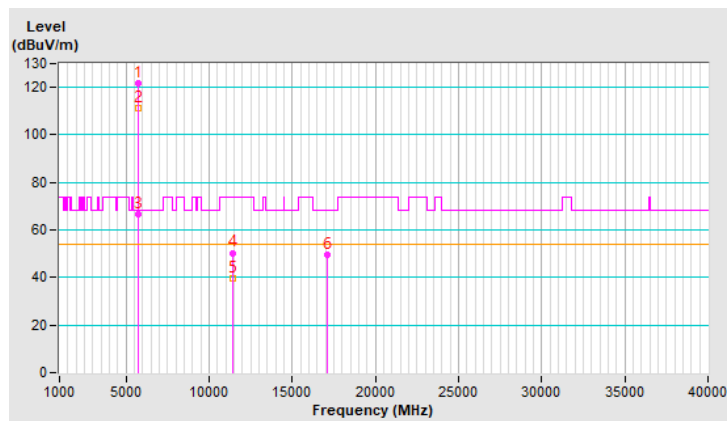


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	5460.00	51.0 PK	74.0	-23.0	1.03 H	162	48.8	2.2
2	5460.00	39.3 AV	54.0	-14.7	1.03 H	162	37.1	2.2
3	#5470.00	52.6 PK	68.2	-15.6	1.03 H	162	50.4	2.2
4	*5720.00	114.7 PK			1.03 H	162	112.3	2.4
5	*5720.00	104.8 AV			1.03 H	162	102.4	2.4
6	#5850.00	52.0 PK	68.2	-16.2	1.03 H	162	49.1	2.9
7	11440.00	53.2 PK	74.0	-20.8	2.18 H	360	41.0	12.2
8	11440.00	42.7 AV	54.0	-11.3	2.18 H	360	30.5	12.2
9	#17160.00	58.8 PK	68.2	-9.4	1.58 H	76	42.3	16.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

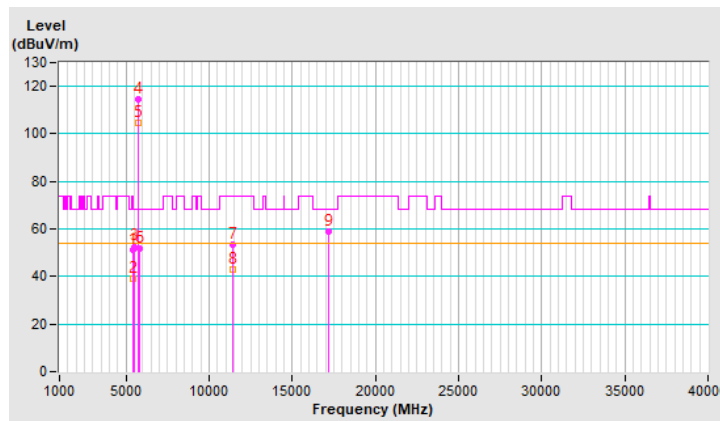


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.3 PK	74.0	-22.7	1.35 V	244	49.1	2.2
2	5460.00	39.5 AV	54.0	-14.5	1.35 V	244	37.3	2.2
3	#5470.00	52.0 PK	68.2	-16.2	1.35 V	244	49.8	2.2
4	*5720.00	124.0 PK			1.35 V	244	121.6	2.4
5	*5720.00	113.8 AV			1.35 V	244	111.4	2.4
6	#5850.00	51.8 PK	68.2	-16.4	1.35 V	244	48.9	2.9
7	11440.00	50.2 PK	74.0	-23.8	1.94 V	320	38.0	12.2
8	11440.00	38.8 AV	54.0	-15.2	1.94 V	320	26.6	12.2
9	#17160.00	49.5 PK	68.2	-18.7	1.50 V	296	33.0	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

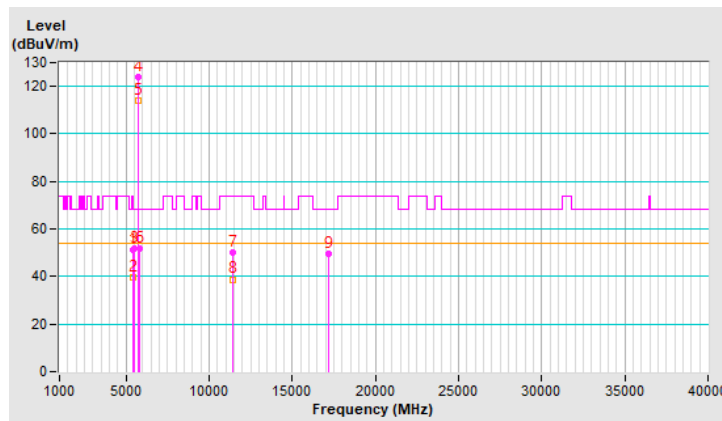


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5551.69	50.2 PK	68.2	-18.0	1.01 H	148	48.0	2.2
2	*5745.00	114.8 PK			1.01 H	148	112.3	2.5
3	*5745.00	104.9 AV			1.01 H	148	102.4	2.5
4	#5972.65	49.6 PK	68.2	-18.6	1.01 H	148	46.7	2.9
5	11490.00	53.3 PK	74.0	-20.7	2.10 H	352	40.9	12.4
6	11490.00	42.7 AV	54.0	-11.3	2.10 H	352	30.3	12.4
7	#17235.00	58.0 PK	68.2	-10.2	1.56 H	76	41.3	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

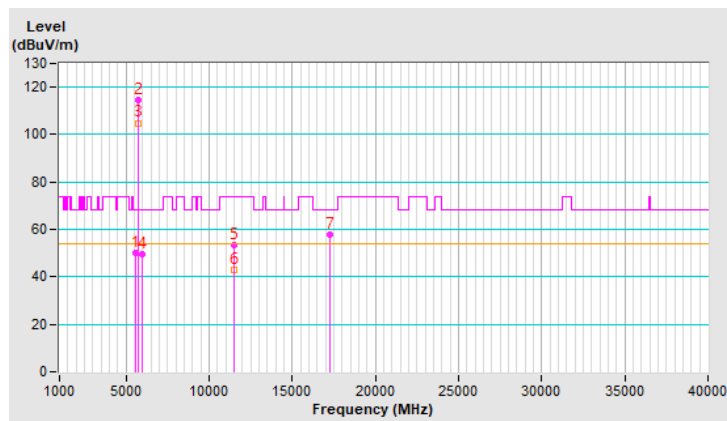


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5573.03	53.0 PK	68.2	-15.2	1.29 V	270	50.8	2.2
2	*5745.00	125.3 PK			1.29 V	270	122.8	2.5
3	*5745.00	115.6 AV			1.29 V	270	113.1	2.5
4	#5987.04	51.1 PK	68.2	-17.1	1.29 V	270	48.2	2.9
5	11490.00	50.2 PK	74.0	-23.8	2.02 V	306	37.8	12.4
6	11490.00	38.8 AV	54.0	-15.2	2.02 V	306	26.4	12.4
7	#17235.00	49.8 PK	68.2	-18.4	1.51 V	321	33.1	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

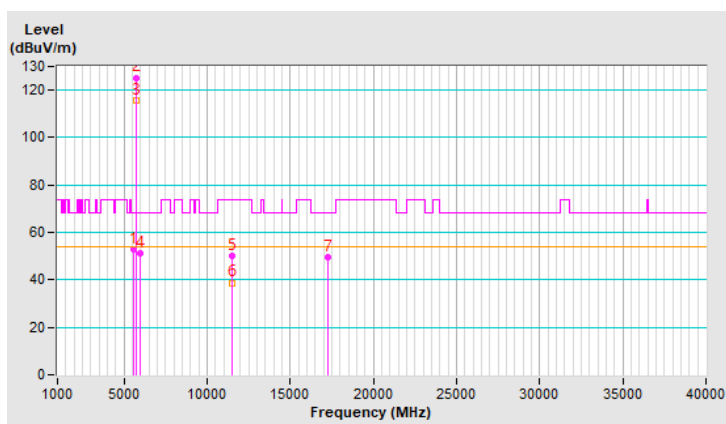




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5554.03	49.9 PK	68.2	-18.3	1.01 H	150	47.7	2.2
2	*5785.00	114.8 PK			1.01 H	150	112.1	2.7
3	*5785.00	105.1 AV			1.01 H	150	102.4	2.7
4	#5929.24	50.9 PK	68.2	-17.3	1.01 H	150	48.0	2.9
5	11570.00	53.7 PK	74.0	-20.3	2.16 H	354	41.3	12.4
6	11570.00	42.8 AV	54.0	-11.2	2.16 H	354	30.4	12.4
7	#17355.00	58.1 PK	68.2	-10.1	1.54 H	78	40.5	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

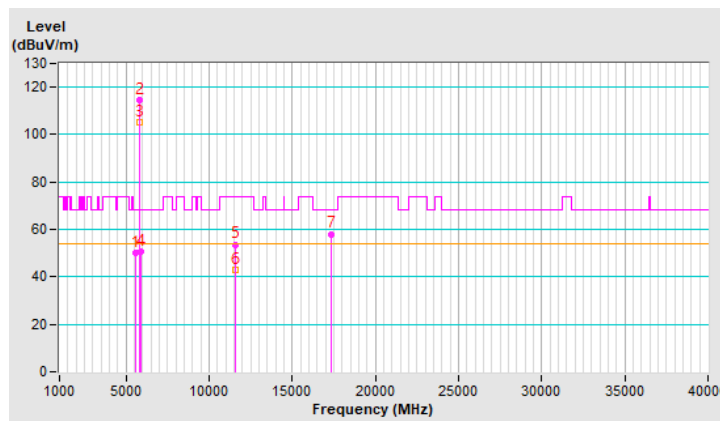




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5618.55	52.8 PK	68.2	-15.4	1.38 V	279	50.6	2.2
2	*5785.00	124.9 PK			1.38 V	279	122.2	2.7
3	*5785.00	115.3 AV			1.38 V	279	112.6	2.7
4	#5997.63	51.7 PK	68.2	-16.5	1.38 V	279	48.8	2.9
5	11570.00	49.8 PK	74.0	-24.2	2.03 V	305	37.4	12.4
6	11570.00	38.5 AV	54.0	-15.5	2.03 V	305	26.1	12.4
7	#17355.00	50.2 PK	68.2	-18.0	1.49 V	306	32.6	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

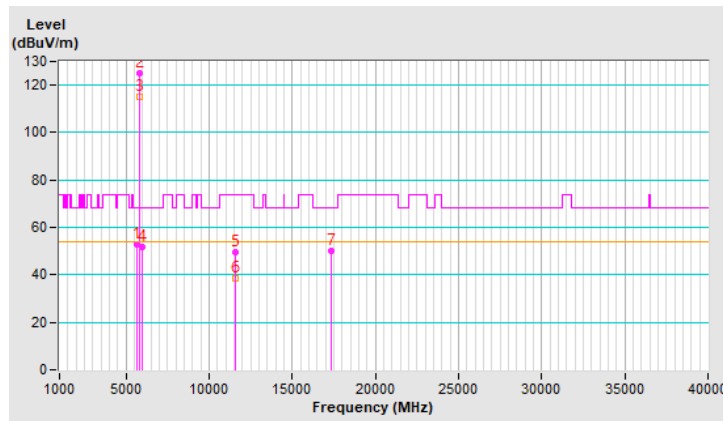


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5580.65	50.3 PK	68.2	-17.9	1.03 H	150	48.1	2.2
2	*5825.00	116.2 PK			1.03 H	150	113.4	2.8
3	*5825.00	105.9 AV			1.03 H	150	103.1	2.8
4	#5973.37	50.5 PK	68.2	-17.7	1.03 H	150	47.6	2.9
5	11650.00	53.3 PK	74.0	-20.7	2.14 H	360	41.4	11.9
6	11650.00	42.5 AV	54.0	-11.5	2.14 H	360	30.6	11.9
7	#17475.00	58.9 PK	68.2	-9.3	1.57 H	80	40.4	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

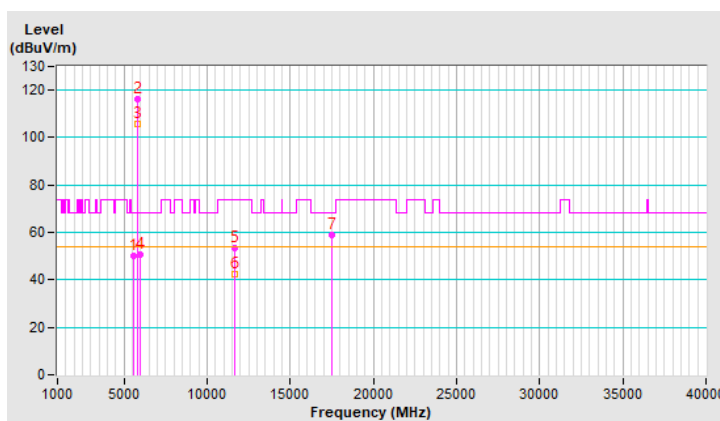




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5583.49	52.5 PK	68.2	-15.7	1.23 V	258	50.3	2.2
2	*5825.00	125.5 PK			1.23 V	258	122.7	2.8
3	*5825.00	115.7 AV			1.23 V	258	112.9	2.8
4	#6013.73	51.7 PK	68.2	-16.5	1.23 V	258	48.7	3.0
5	11650.00	50.5 PK	74.0	-23.5	1.96 V	305	38.6	11.9
6	11650.00	39.2 AV	54.0	-14.8	1.96 V	305	27.3	11.9
7	#17475.00	49.7 PK	68.2	-18.5	1.49 V	292	31.2	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

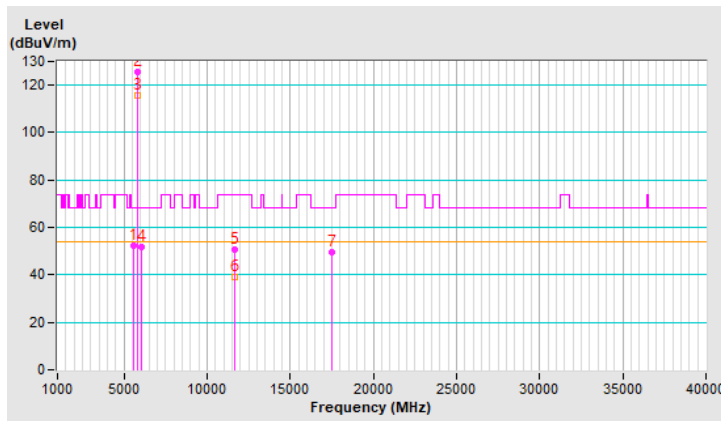


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.8 PK	74.0	-5.2	1.02 H	144	66.4	2.4
2	5150.00	41.0 AV	54.0	-13.0	1.02 H	144	38.6	2.4
3	*5180.00	110.9 PK			1.02 H	144	108.7	2.2
4	*5180.00	100.5 AV			1.02 H	144	98.3	2.2
5	#10360.00	52.7 PK	68.2	-15.5	2.12 H	326	41.0	11.7
6	15540.00	58.2 PK	74.0	-15.8	1.57 H	44	46.4	11.8
7	15540.00	46.3 AV	54.0	-7.7	1.57 H	44	34.5	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

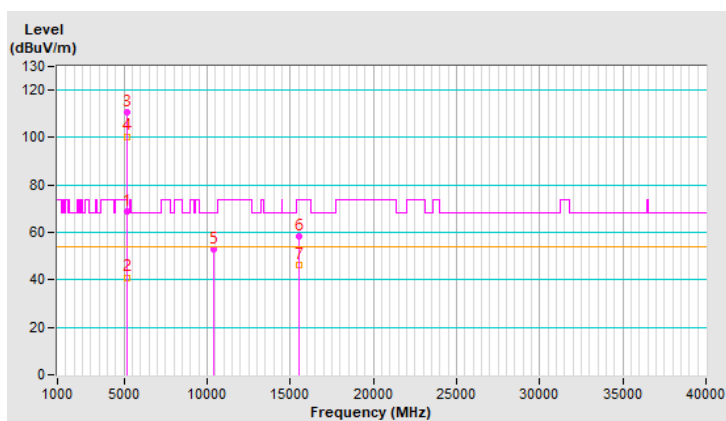




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.2 PK	74.0	-1.8	1.40 V	300	69.8	2.4
2	5150.00	45.3 AV	54.0	-8.7	1.40 V	300	42.9	2.4
3	*5180.00	120.4 PK			1.40 V	300	118.2	2.2
4	*5180.00	109.3 AV			1.40 V	300	107.1	2.2
5	#10360.00	50.2 PK	68.2	-18.0	1.93 V	295	38.5	11.7
6	15540.00	49.9 PK	74.0	-24.1	1.55 V	319	38.1	11.8
7	15540.00	39.9 AV	54.0	-14.1	1.55 V	319	28.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

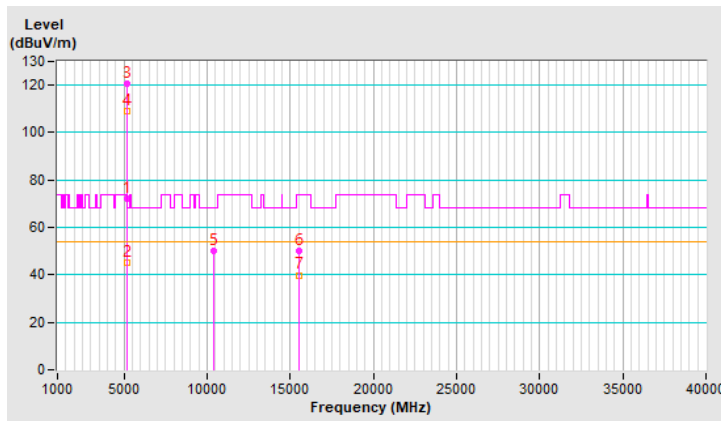




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	115.0 PK			1.09 H	178	112.9	2.1
2	*5200.00	104.6 AV			1.09 H	178	102.5	2.1
3	#10400.00	52.9 PK	68.2	-15.3	2.11 H	315	41.0	11.9
4	15600.00	58.3 PK	74.0	-15.7	1.57 H	28	46.8	11.5
5	15600.00	46.6 AV	54.0	-7.4	1.57 H	28	35.1	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

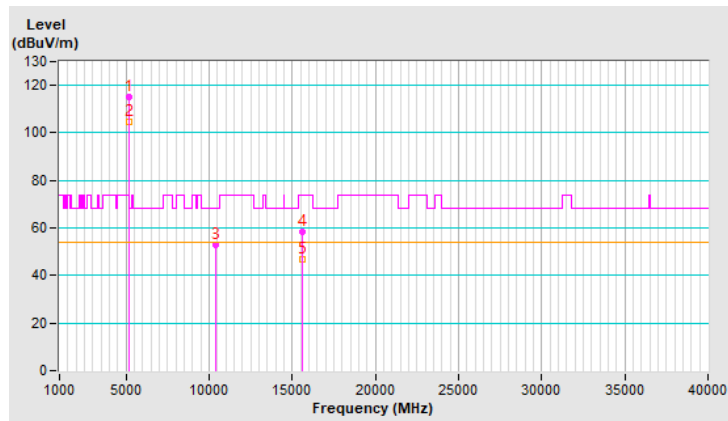




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	122.2 PK			1.20 V	269	120.1	2.1
2	*5200.00	111.9 AV			1.20 V	269	109.8	2.1
3	#10400.00	50.3 PK	68.2	-17.9	1.94 V	283	38.4	11.9
4	15600.00	49.5 PK	74.0	-24.5	1.52 V	319	38.0	11.5
5	15600.00	39.4 AV	54.0	-14.6	1.52 V	319	27.9	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

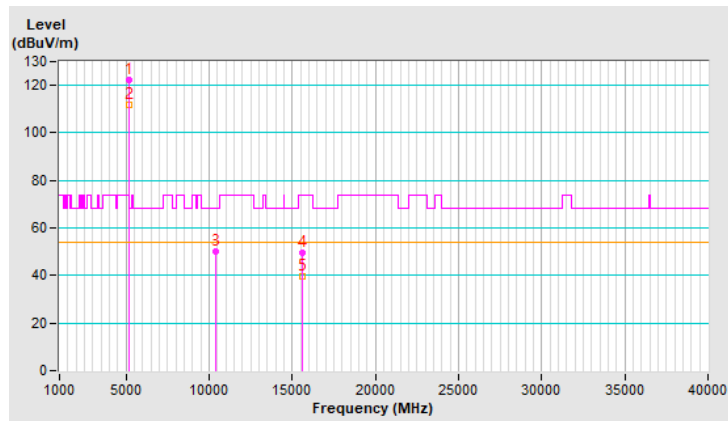


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	115.0 PK			1.03 H	163	113.1	1.9
2	*5240.00	104.7 AV			1.03 H	163	102.8	1.9
3	#10480.00	52.9 PK	68.2	-15.3	2.16 H	342	41.0	11.9
4	15720.00	57.9 PK	74.0	-16.1	1.54 H	60	46.2	11.7
5	15720.00	45.8 AV	54.0	-8.2	1.54 H	60	34.1	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

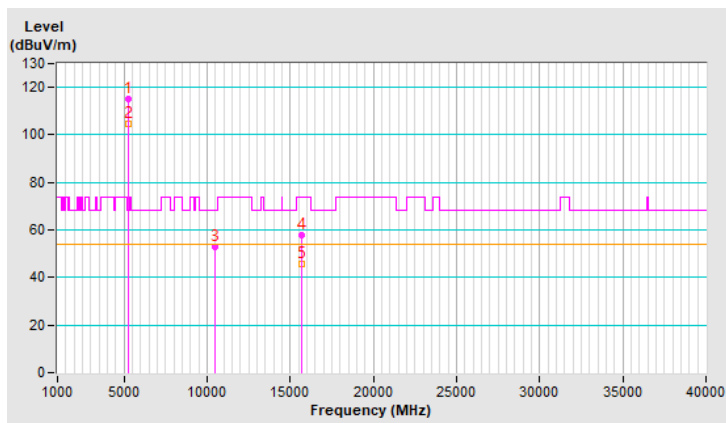




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	123.1 PK			1.31 V	268	121.2	1.9
2	*5240.00	112.8 AV			1.31 V	268	110.9	1.9
3	#10480.00	50.4 PK	68.2	-17.8	1.96 V	301	38.5	11.9
4	15720.00	49.8 PK	74.0	-24.2	1.55 V	313	38.1	11.7
5	15720.00	40.1 AV	54.0	-13.9	1.55 V	313	28.4	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

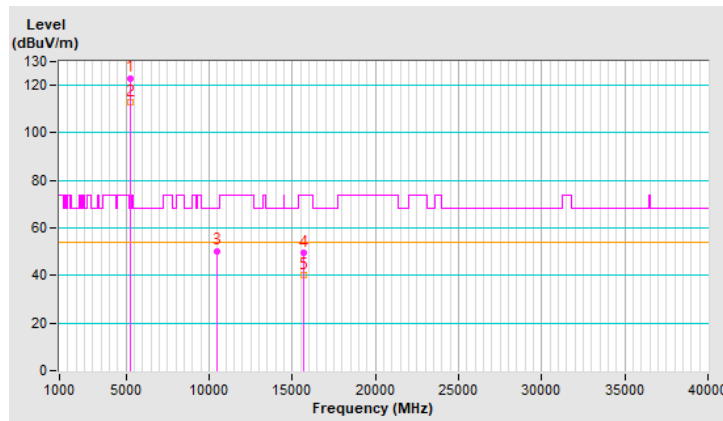


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	114.9 PK			1.01 H	150	113.1	1.8
2	*5260.00	104.7 AV			1.01 H	150	102.9	1.8
3	#10520.00	53.3 PK	68.2	-14.9	2.13 H	311	41.3	12.0
4	15780.00	58.2 PK	74.0	-15.8	1.51 H	29	46.7	11.5
5	15780.00	46.1 AV	54.0	-7.9	1.51 H	29	34.6	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

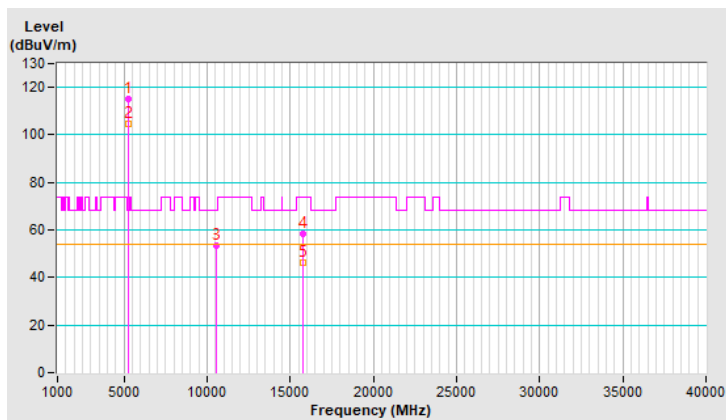


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	122.9 PK			1.21 V	249	121.1	1.8
2	*5260.00	112.8 AV			1.21 V	249	111.0	1.8
3	#10520.00	50.4 PK	68.2	-17.8	1.91 V	308	38.4	12.0
4	15780.00	49.8 PK	74.0	-24.2	1.59 V	325	38.3	11.5
5	15780.00	39.6 AV	54.0	-14.4	1.59 V	325	28.1	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

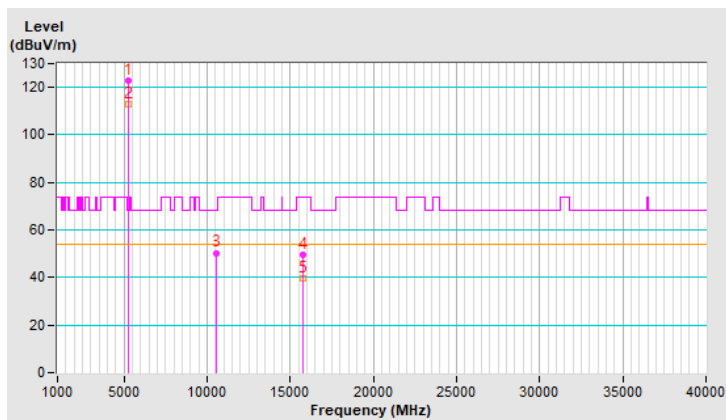




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5300.00	115.2 PK			1.05 H	167	113.5	1.7
2	*5300.00	104.6 AV			1.05 H	167	102.9	1.7
3	10600.00	53.2 PK	74.0	-20.8	2.14 H	335	41.5	11.7
4	10600.00	42.9 AV	54.0	-11.1	2.14 H	335	31.2	11.7
5	15900.00	58.4 PK	74.0	-15.6	1.62 H	30	47.3	11.1
6	15900.00	46.8 AV	54.0	-7.2	1.62 H	30	35.7	11.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

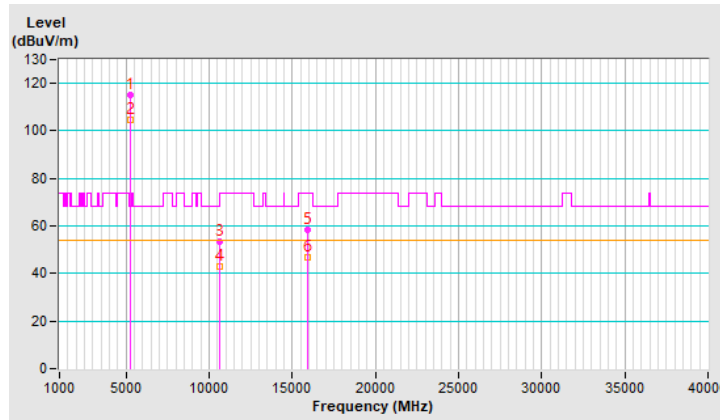


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	122.7 PK			1.24 V	248	121.0	1.7
2	*5300.00	112.4 AV			1.24 V	248	110.7	1.7
3	10600.00	50.7 PK	74.0	-23.3	1.88 V	279	39.0	11.7
4	10600.00	39.3 AV	54.0	-14.7	1.88 V	279	27.6	11.7
5	15900.00	50.0 PK	74.0	-24.0	1.60 V	327	38.9	11.1
6	15900.00	39.9 AV	54.0	-14.1	1.60 V	327	28.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

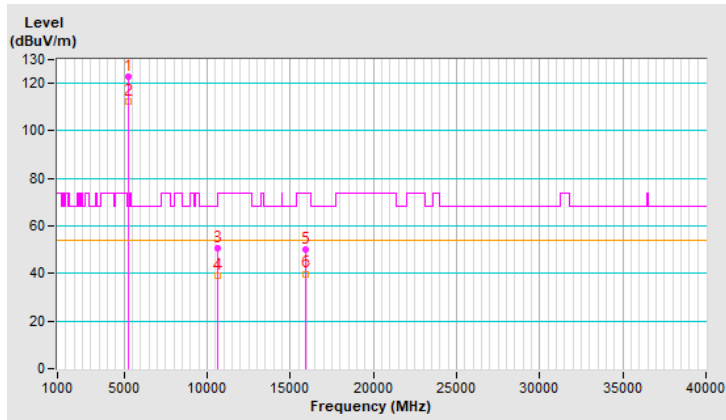


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	110.3 PK			1.02 H	180	108.6	1.7
2	*5320.00	100.6 AV			1.02 H	180	98.9	1.7
3	5350.00	63.4 PK	74.0	-10.6	1.02 H	180	61.4	2.0
4	5350.00	39.2 AV	54.0	-14.8	1.02 H	180	37.2	2.0
5	10640.00	53.2 PK	74.0	-20.8	2.16 H	331	41.6	11.6
6	10640.00	42.9 AV	54.0	-11.1	2.16 H	331	31.3	11.6
7	15960.00	57.7 PK	74.0	-16.3	1.54 H	59	46.3	11.4
8	15960.00	45.8 AV	54.0	-8.2	1.54 H	59	34.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

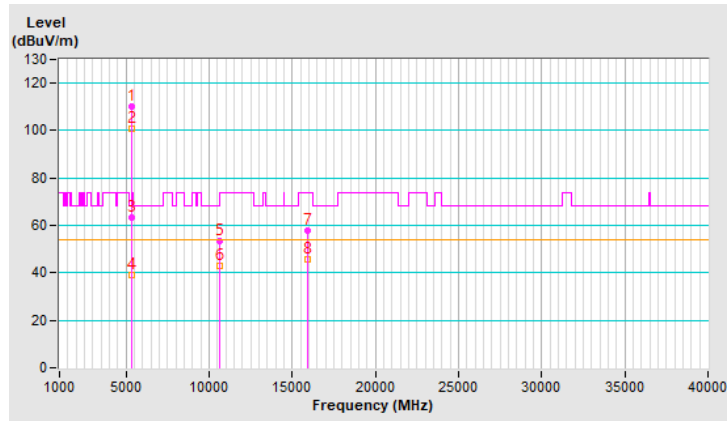


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	119.3 PK			1.33 V	245	117.6	1.7
2	*5320.00	109.4 AV			1.33 V	245	107.7	1.7
3	5350.00	72.0 PK	74.0	-2.0	1.33 V	245	70.0	2.0
4	5350.00	45.0 AV	54.0	-9.0	1.33 V	245	43.0	2.0
5	10640.00	49.6 PK	74.0	-24.4	1.98 V	291	38.0	11.6
6	10640.00	38.5 AV	54.0	-15.5	1.98 V	291	26.9	11.6
7	15960.00	50.0 PK	74.0	-24.0	1.58 V	307	38.6	11.4
8	15960.00	40.3 AV	54.0	-13.7	1.58 V	307	28.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

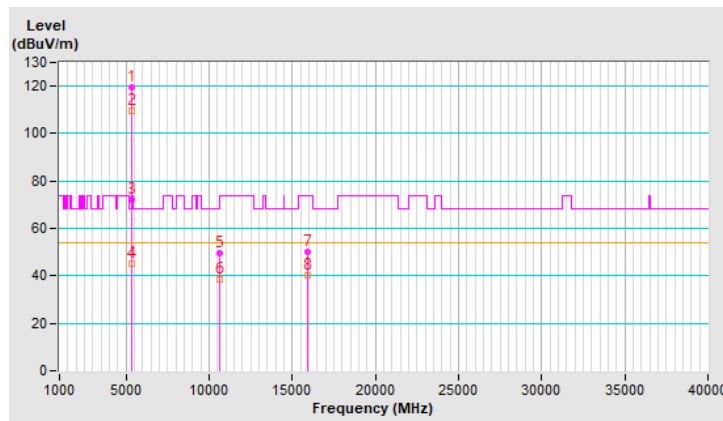


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5458.05	50.7 PK	74.0	-23.3	1.02 H	145	48.5	2.2
2	5458.05	39.7 AV	54.0	-14.3	1.02 H	145	37.5	2.2
3	#5468.73	66.0 PK	68.2	-2.2	1.02 H	145	63.8	2.2
4	*5500.00	110.6 PK			1.02 H	145	108.5	2.1
5	*5500.00	100.5 AV			1.02 H	145	98.4	2.1
6	11000.00	52.7 PK	74.0	-21.3	2.07 H	339	40.6	12.1
7	11000.00	42.6 AV	54.0	-11.4	2.07 H	339	30.5	12.1
8	#16500.00	58.1 PK	68.2	-10.1	1.62 H	56	44.7	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

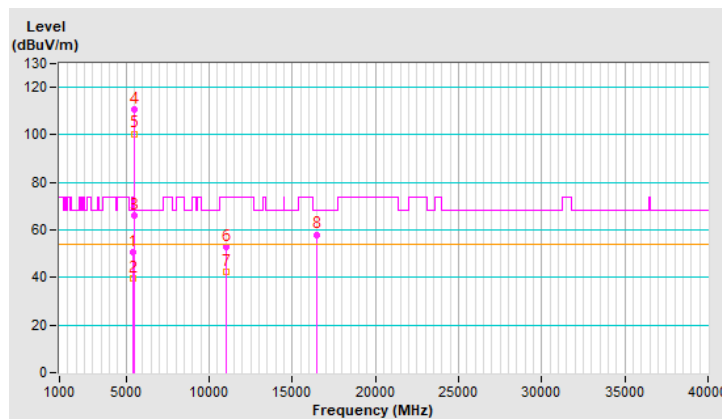


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5458.00	54.7 PK	74.0	-19.3	1.18 V	250	52.5	2.2
2	5458.00	45.1 AV	54.0	-8.9	1.18 V	250	42.9	2.2
3	#5466.00	66.7 PK	68.2	-1.5	1.18 V	250	64.5	2.2
4	*5500.00	119.8 PK			1.18 V	250	117.7	2.1
5	*5500.00	109.7 AV			1.18 V	250	107.6	2.1
6	11000.00	50.1 PK	74.0	-23.9	1.98 V	288	38.0	12.1
7	11000.00	39.2 AV	54.0	-14.8	1.98 V	288	27.1	12.1
8	#16500.00	50.0 PK	68.2	-18.2	1.59 V	328	36.6	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

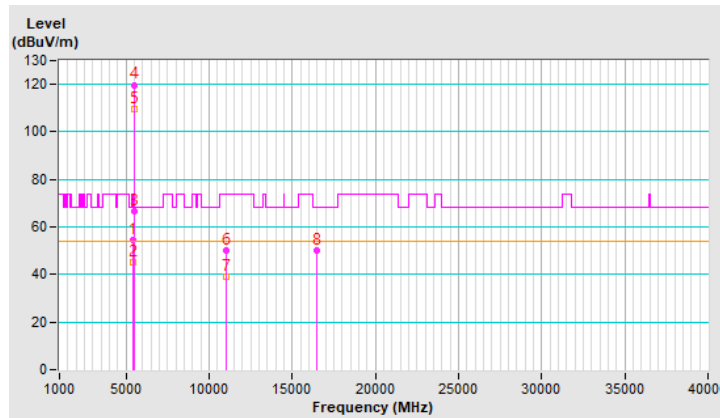




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5580.00	115.2 PK			1.09 H	154	113.0	2.2
2	*5580.00	104.8 AV			1.09 H	154	102.6	2.2
3	11160.00	52.2 PK	74.0	-21.8	2.08 H	337	40.3	11.9
4	11160.00	41.9 AV	54.0	-12.1	2.08 H	337	30.0	11.9
5	#16740.00	58.2 PK	68.2	-10.0	1.52 H	56	43.0	15.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

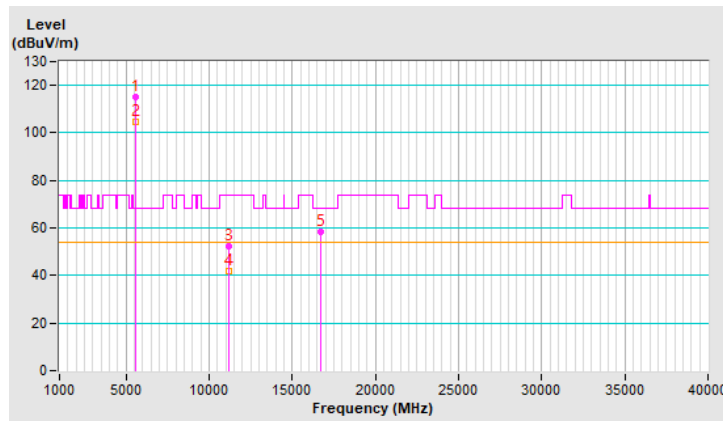




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	122.9 PK			1.28 V	259	120.7	2.2
2	*5580.00	112.9 AV			1.28 V	259	110.7	2.2
3	11160.00	50.4 PK	74.0	-23.6	1.88 V	310	38.5	11.9
4	11160.00	38.9 AV	54.0	-15.1	1.88 V	310	27.0	11.9
5	#16740.00	49.1 PK	68.2	-19.1	1.51 V	306	33.9	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

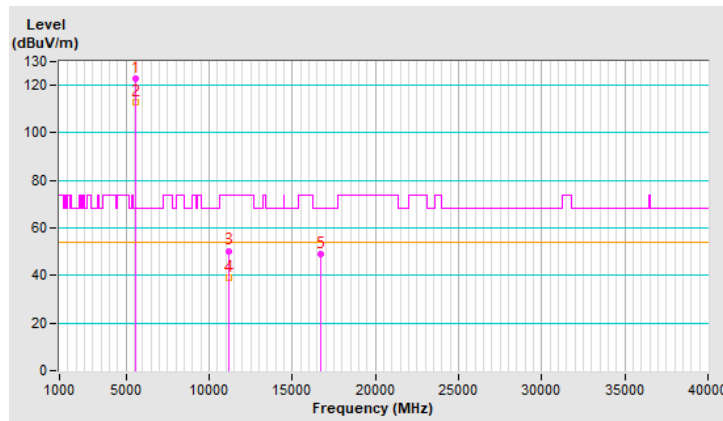


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	111.2 PK			1.00 H	165	108.9	2.3
2	*5700.00	101.1 AV			1.00 H	165	98.8	2.3
3	#5725.00	61.9 PK	68.2	-6.3	1.00 H	165	59.4	2.5
4	11400.00	52.8 PK	74.0	-21.2	2.09 H	319	40.6	12.2
5	11400.00	42.5 AV	54.0	-11.5	2.09 H	319	30.3	12.2
6	#17100.00	58.0 PK	68.2	-10.2	1.55 H	52	41.4	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

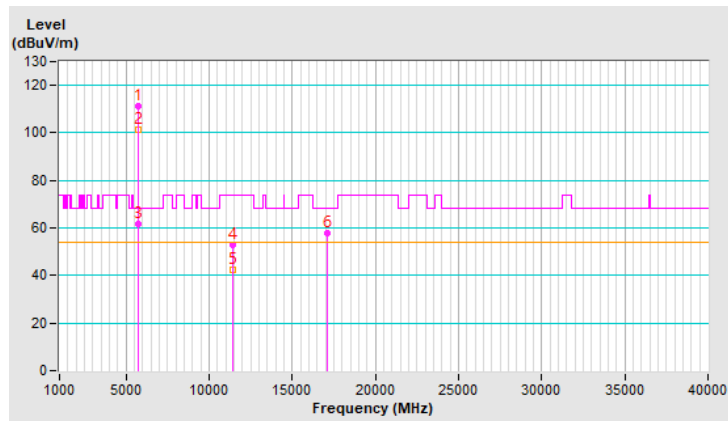


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	119.5 PK			1.49 V	272	117.2	2.3
2	*5700.00	109.8 AV			1.49 V	272	107.5	2.3
3	#5725.00	66.5 PK	68.2	-1.7	1.49 V	272	64.0	2.5
4	11400.00	50.5 PK	74.0	-23.5	1.90 V	298	38.3	12.2
5	11400.00	39.1 AV	54.0	-14.9	1.90 V	298	26.9	12.2
6	#17100.00	49.5 PK	68.2	-18.7	1.54 V	328	32.9	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

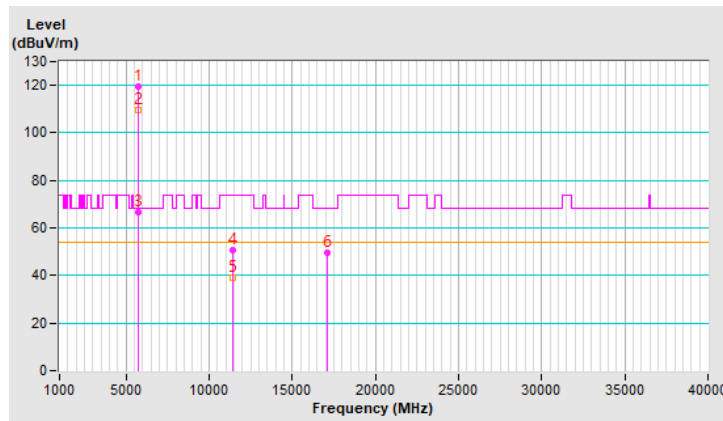


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	5460.00	51.4 PK	74.0	-22.6	1.05 H	164	49.2	2.2
2	5460.00	39.3 AV	54.0	-14.7	1.05 H	164	37.1	2.2
3	#5470.00	52.2 PK	68.2	-16.0	1.05 H	164	50.0	2.2
4	*5720.00	114.7 PK			1.05 H	164	112.3	2.4
5	*5720.00	104.3 AV			1.05 H	164	101.9	2.4
6	#5850.00	52.0 PK	68.2	-16.2	1.05 H	164	49.1	2.9
7	11440.00	52.5 PK	74.0	-21.5	2.14 H	320	40.3	12.2
8	11440.00	42.5 AV	54.0	-11.5	2.14 H	320	30.3	12.2
9	#17160.00	58.4 PK	68.2	-9.8	1.58 H	29	41.9	16.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

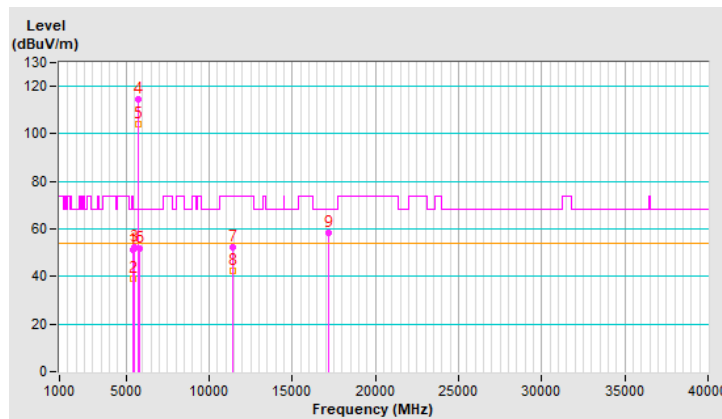


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.7 PK	74.0	-23.3	1.26 V	263	48.5	2.2
2	5460.00	38.9 AV	54.0	-15.1	1.26 V	263	36.7	2.2
3	#5470.00	52.7 PK	68.2	-15.5	1.26 V	263	50.5	2.2
4	*5720.00	122.5 PK			1.26 V	263	120.1	2.4
5	*5720.00	112.4 AV			1.26 V	263	110.0	2.4
6	#5850.00	52.1 PK	68.2	-16.1	1.26 V	263	49.2	2.9
7	11440.00	50.1 PK	74.0	-23.9	1.98 V	292	37.9	12.2
8	11440.00	39.1 AV	54.0	-14.9	1.98 V	292	26.9	12.2
9	#17160.00	50.4 PK	68.2	-17.8	1.54 V	309	33.9	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

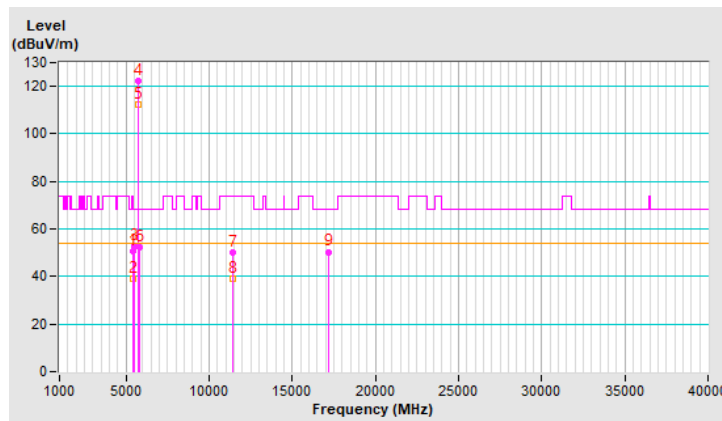


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5590.91	50.8 PK	68.2	-17.4	1.00 H	149	48.6	2.2
2	*5745.00	114.0 PK			1.00 H	149	111.5	2.5
3	*5745.00	103.8 AV			1.00 H	149	101.3	2.5
4	#5991.88	50.7 PK	68.2	-17.5	1.00 H	149	47.8	2.9
5	11490.00	52.4 PK	74.0	-21.6	2.14 H	318	40.0	12.4
6	11490.00	42.3 AV	54.0	-11.7	2.14 H	318	29.9	12.4
7	#17235.00	58.0 PK	68.2	-10.2	1.52 H	49	41.3	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

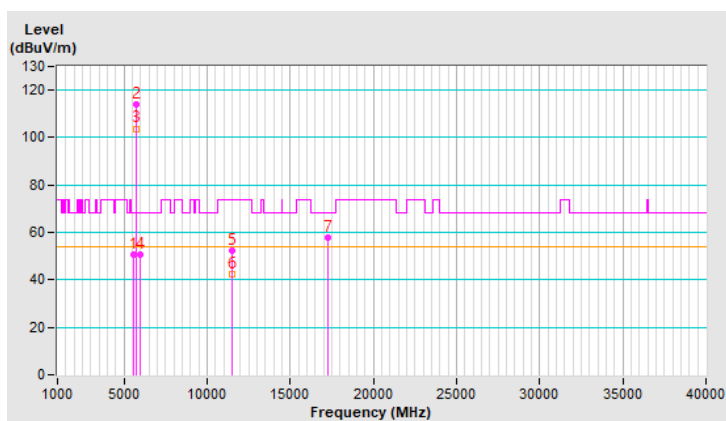




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5624.88	52.4 PK	68.2	-15.8	1.23 V	263	50.2	2.2
2	*5745.00	123.1 PK			1.23 V	263	120.6	2.5
3	*5745.00	112.9 AV			1.23 V	263	110.4	2.5
4	#5995.27	50.4 PK	68.2	-17.8	1.23 V	263	47.5	2.9
5	11490.00	50.0 PK	74.0	-24.0	1.87 V	291	37.6	12.4
6	11490.00	38.9 AV	54.0	-15.1	1.87 V	291	26.5	12.4
7	#17235.00	49.4 PK	68.2	-18.8	1.53 V	316	32.7	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

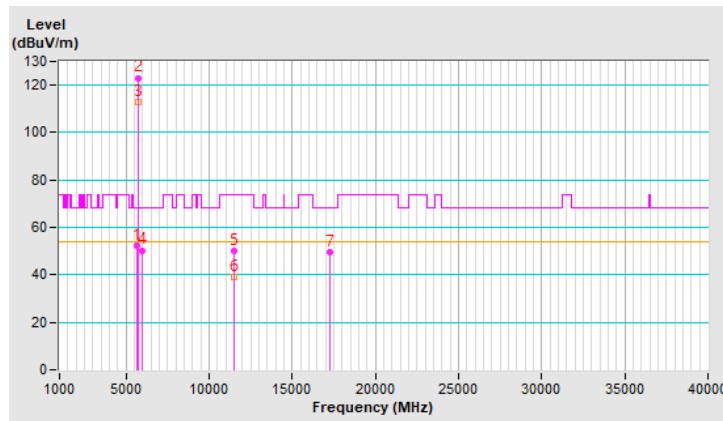




RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.23	50.2 PK	68.2	-18.0	1.02 H	153	47.9	2.3
2	*5785.00	113.5 PK			1.02 H	153	110.8	2.7
3	*5785.00	103.7 AV			1.02 H	153	101.0	2.7
4	#5966.94	49.7 PK	68.2	-18.5	1.02 H	153	46.8	2.9
5	11570.00	52.9 PK	74.0	-21.1	2.13 H	342	40.5	12.4
6	11570.00	42.3 AV	54.0	-11.7	2.13 H	342	29.9	12.4
7	#17355.00	58.1 PK	68.2	-10.1	1.61 H	34	40.5	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

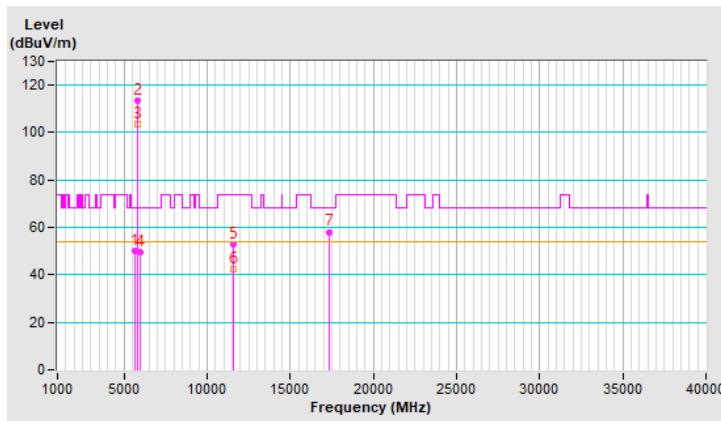


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5601.54	52.1 PK	68.2	-16.1	1.44 V	280	49.9	2.2
2	*5785.00	123.6 PK			1.44 V	280	120.9	2.7
3	*5785.00	113.0 AV			1.44 V	280	110.3	2.7
4	#5966.86	51.1 PK	68.2	-17.1	1.44 V	280	48.2	2.9
5	11570.00	50.0 PK	74.0	-24.0	1.94 V	299	37.6	12.4
6	11570.00	38.9 AV	54.0	-15.1	1.94 V	299	26.5	12.4
7	#17355.00	49.7 PK	68.2	-18.5	1.55 V	316	32.1	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

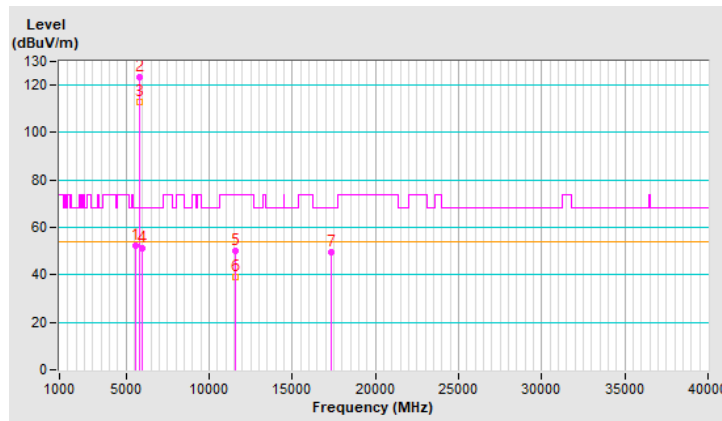


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5579.47	50.3 PK	68.2	-17.9	1.01 H	150	48.1	2.2
2	*5825.00	113.9 PK			1.01 H	150	111.1	2.8
3	*5825.00	103.9 AV			1.01 H	150	101.1	2.8
4	#6000.07	50.5 PK	68.2	-17.7	1.01 H	150	47.6	2.9
5	11650.00	52.5 PK	74.0	-21.5	2.07 H	338	40.6	11.9
6	11650.00	42.4 AV	54.0	-11.6	2.07 H	338	30.5	11.9
7	#17475.00	58.4 PK	68.2	-9.8	1.58 H	37	39.9	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

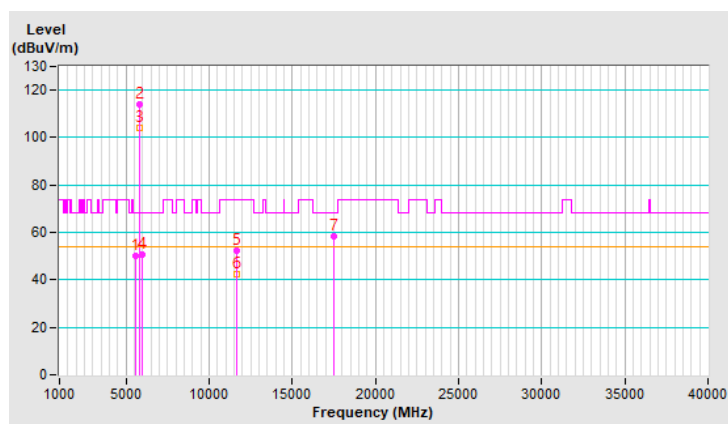


RF Mode	TX 20 MHz Preamble 802.11ax (RU106)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5583.45	52.3 PK	68.2	-15.9	1.48 V	291	50.1	2.2
2	*5825.00	123.9 PK			1.48 V	291	121.1	2.8
3	*5825.00	113.2 AV			1.48 V	291	110.4	2.8
4	#5949.91	51.2 PK	68.2	-17.0	1.48 V	291	48.3	2.9
5	11650.00	50.5 PK	74.0	-23.5	1.99 V	288	38.6	11.9
6	11650.00	39.3 AV	54.0	-14.7	1.99 V	288	27.4	11.9
7	#17475.00	50.2 PK	68.2	-18.0	1.51 V	322	31.7	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.


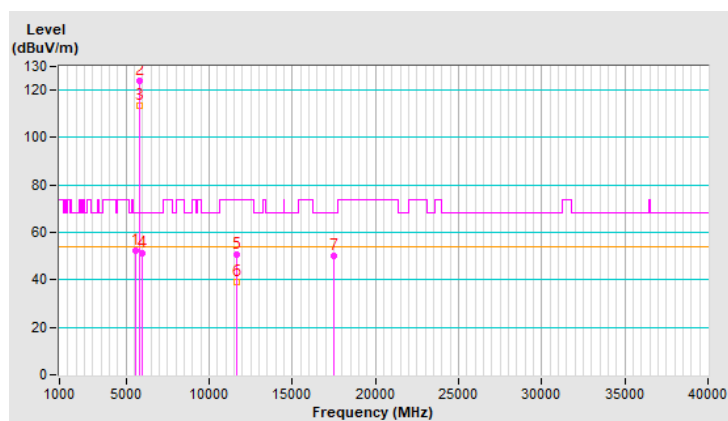


Mode C_Plot of Band Edge


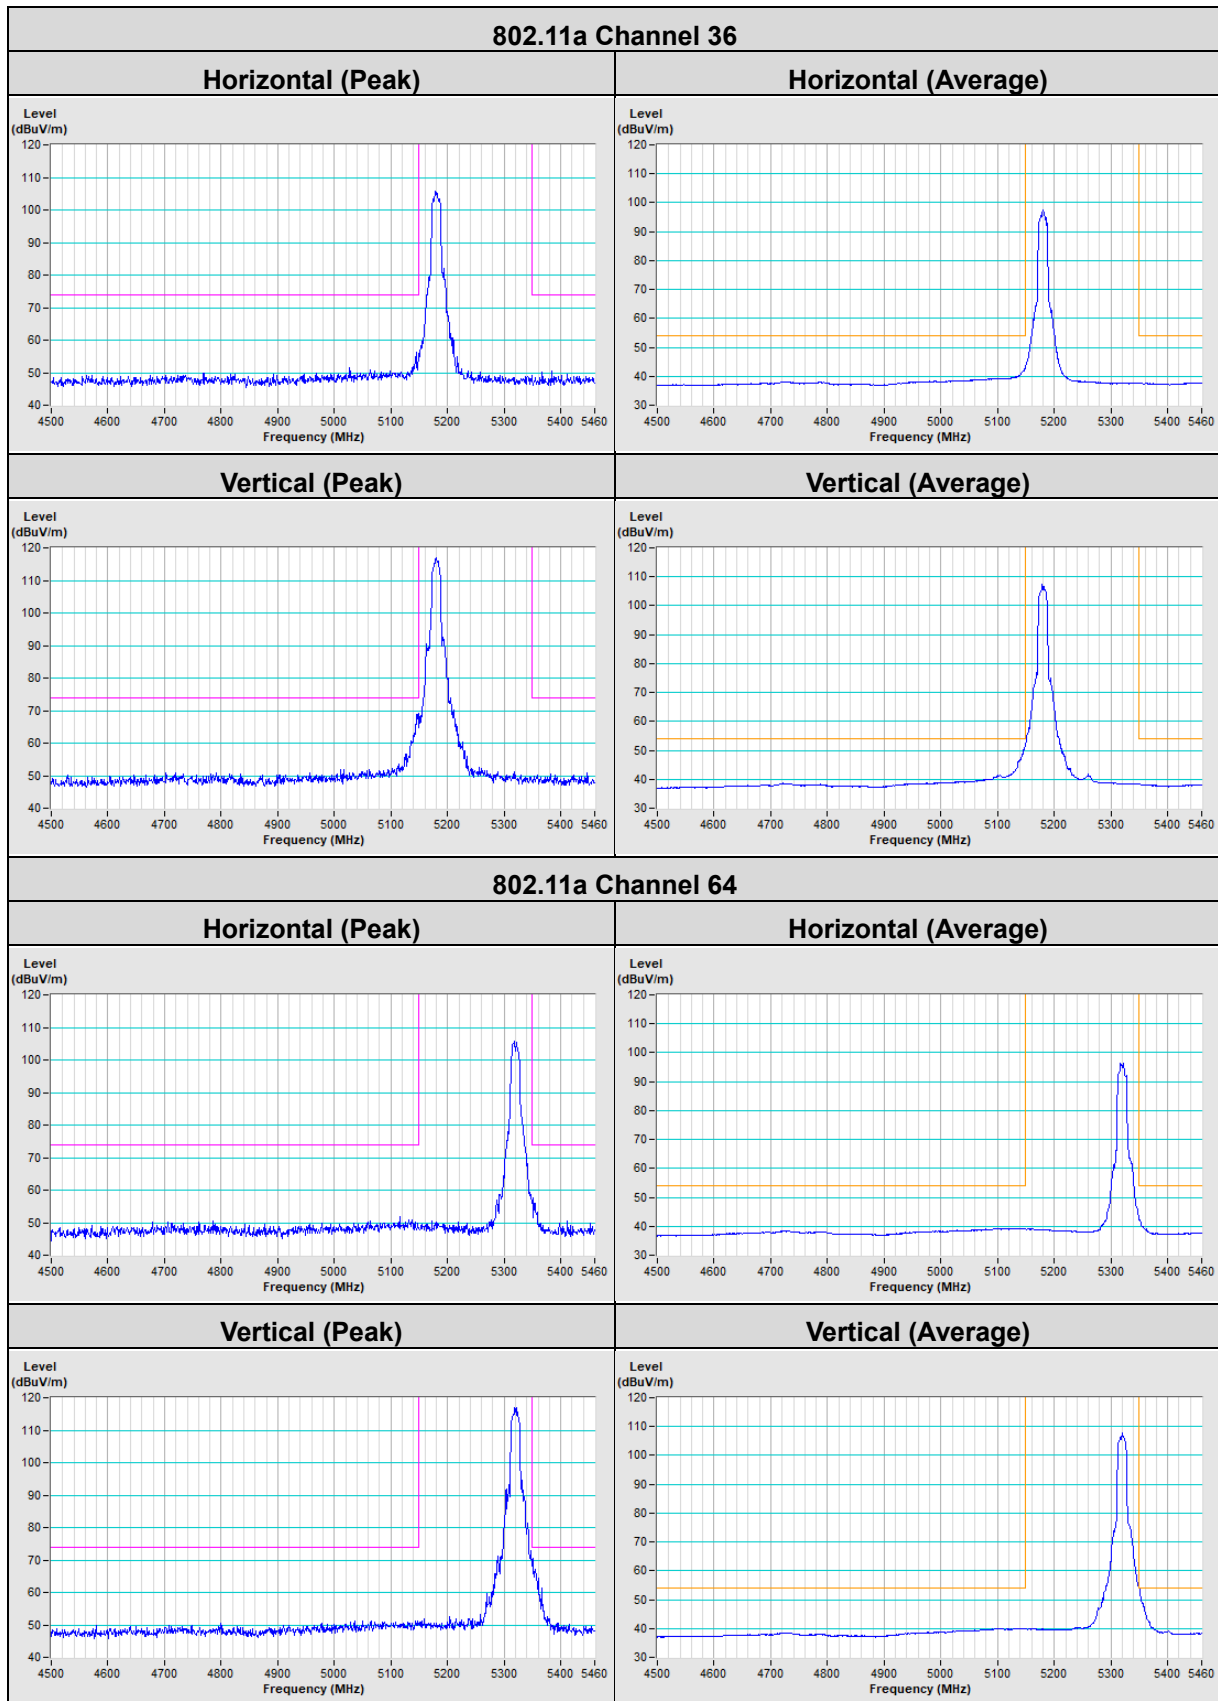


802.11a Channel 100

Horizontal (Peak) **Horizontal (Average)**

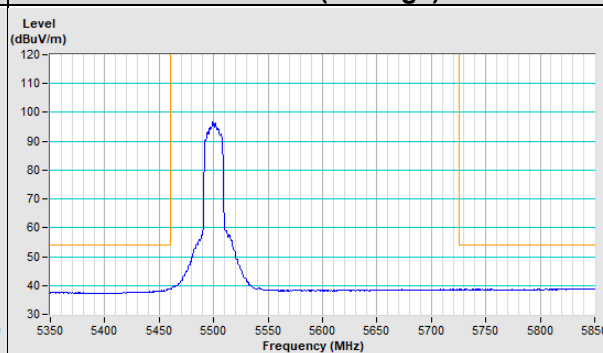
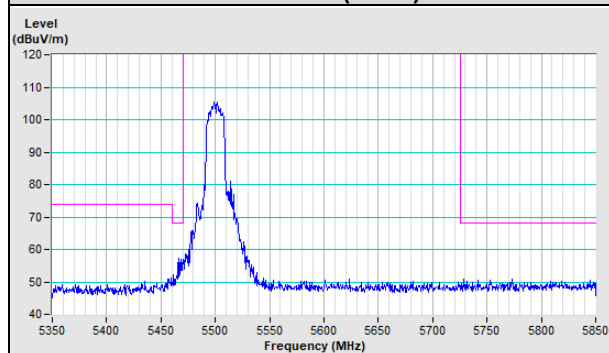


Vertical (Peak) **Vertical (Average)**

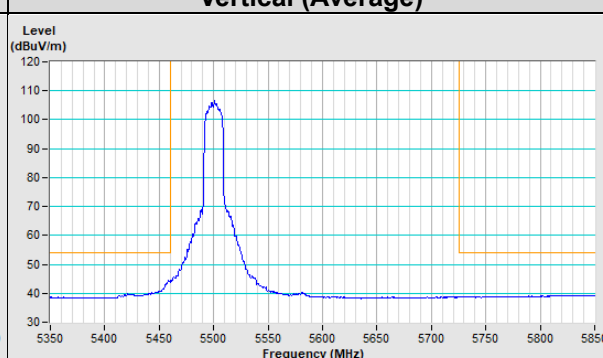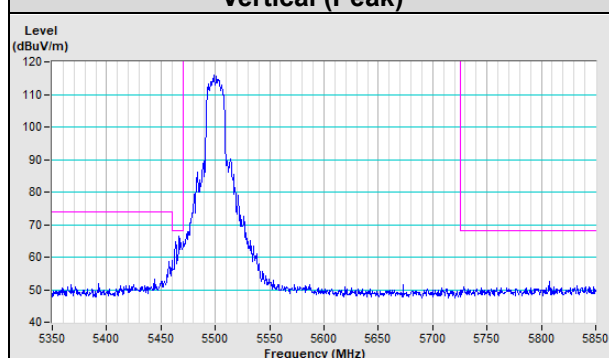



802.11a Channel 149


Horizontal (Peak) **Vertical (Peak)**

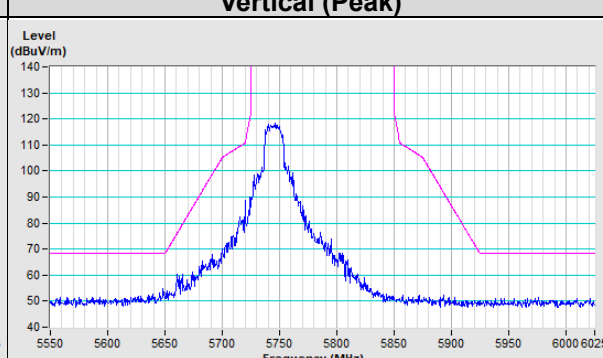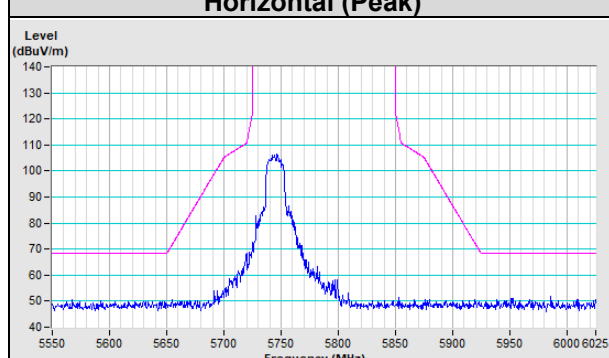



802.11a Channel 157

Horizontal (Peak) **Vertical (Peak)**

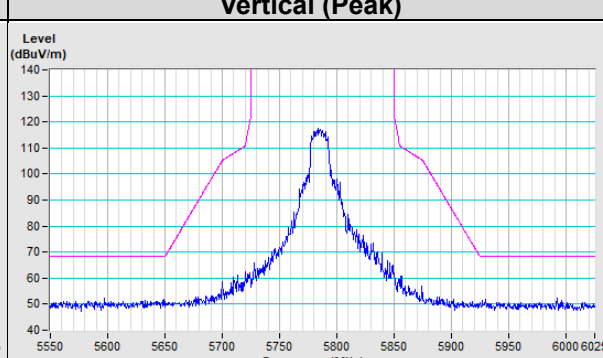
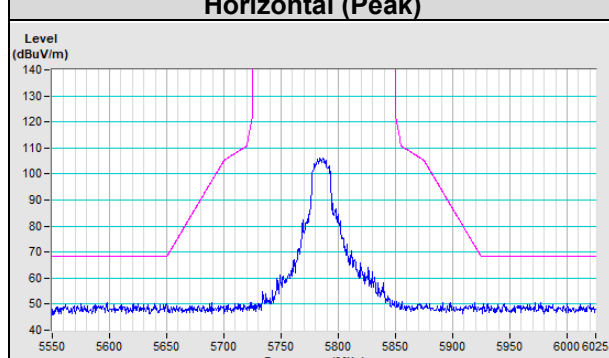


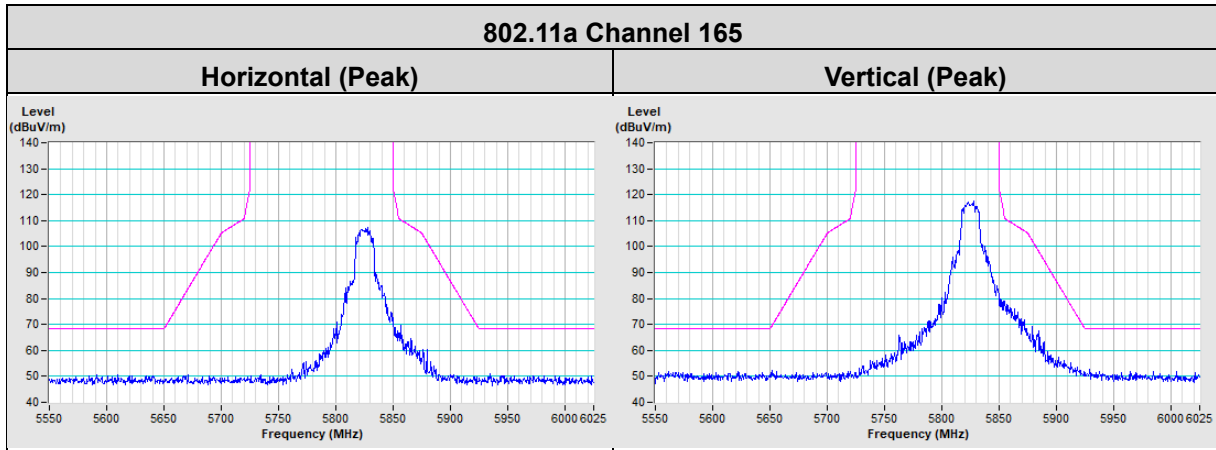


802.11ax (HE20) Channel 36

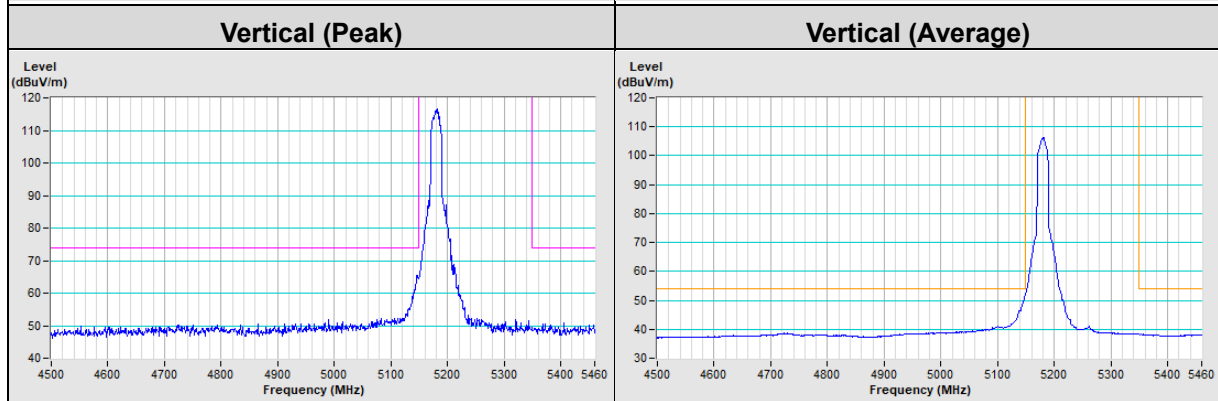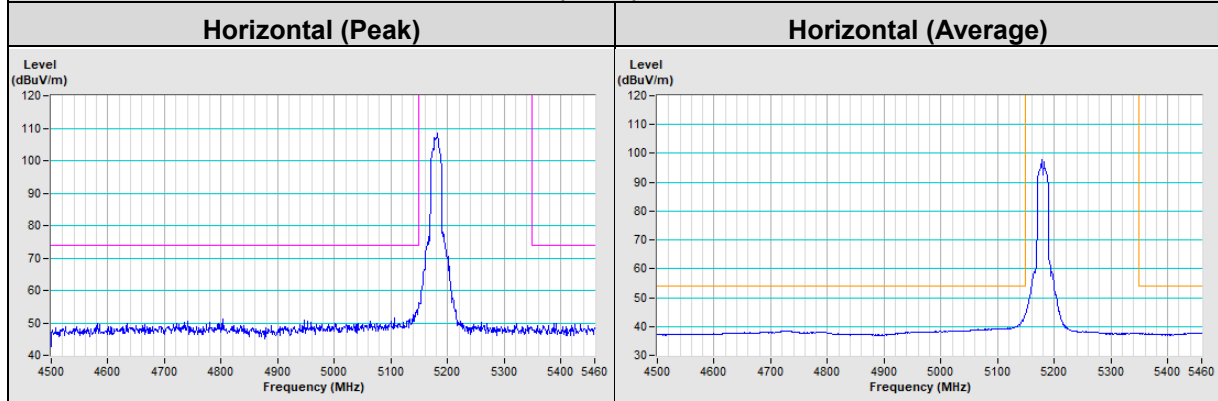


802.11ax (HE20) Channel 64

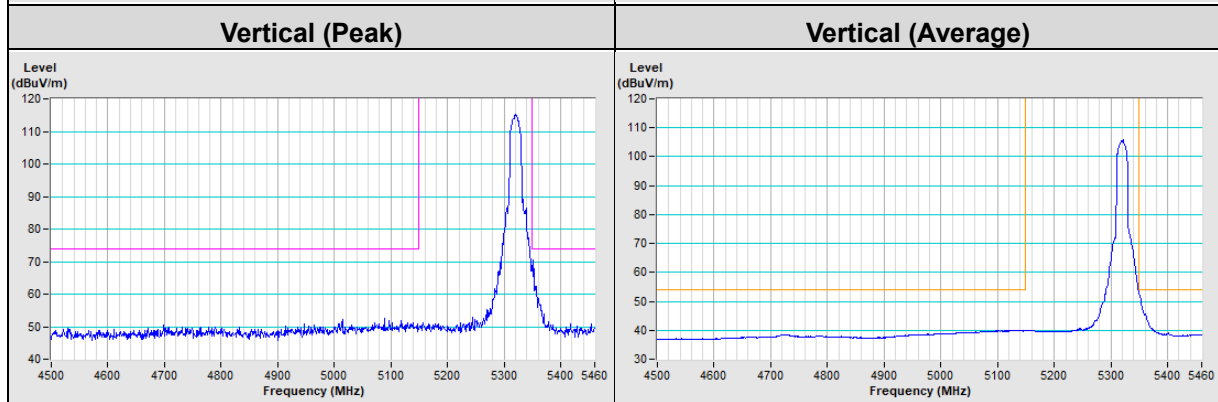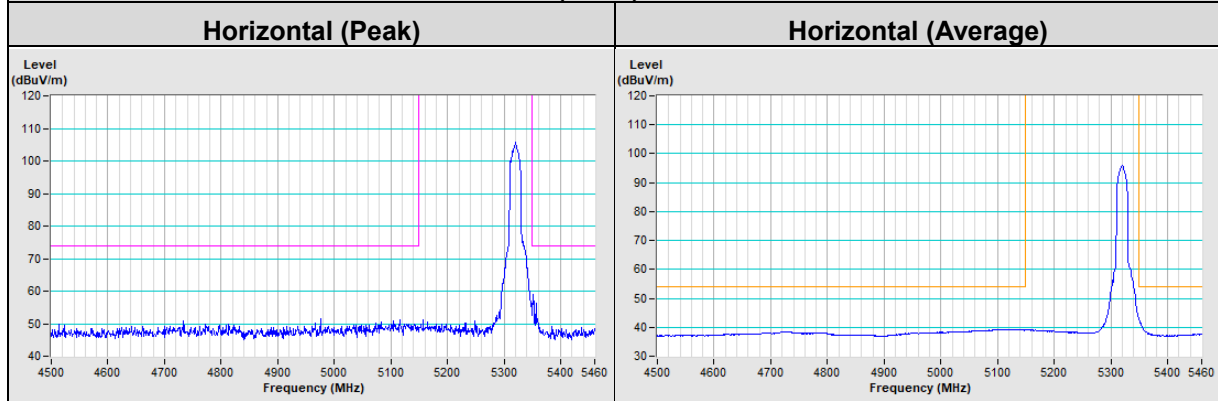


802.11ax (HE20) Channel 100

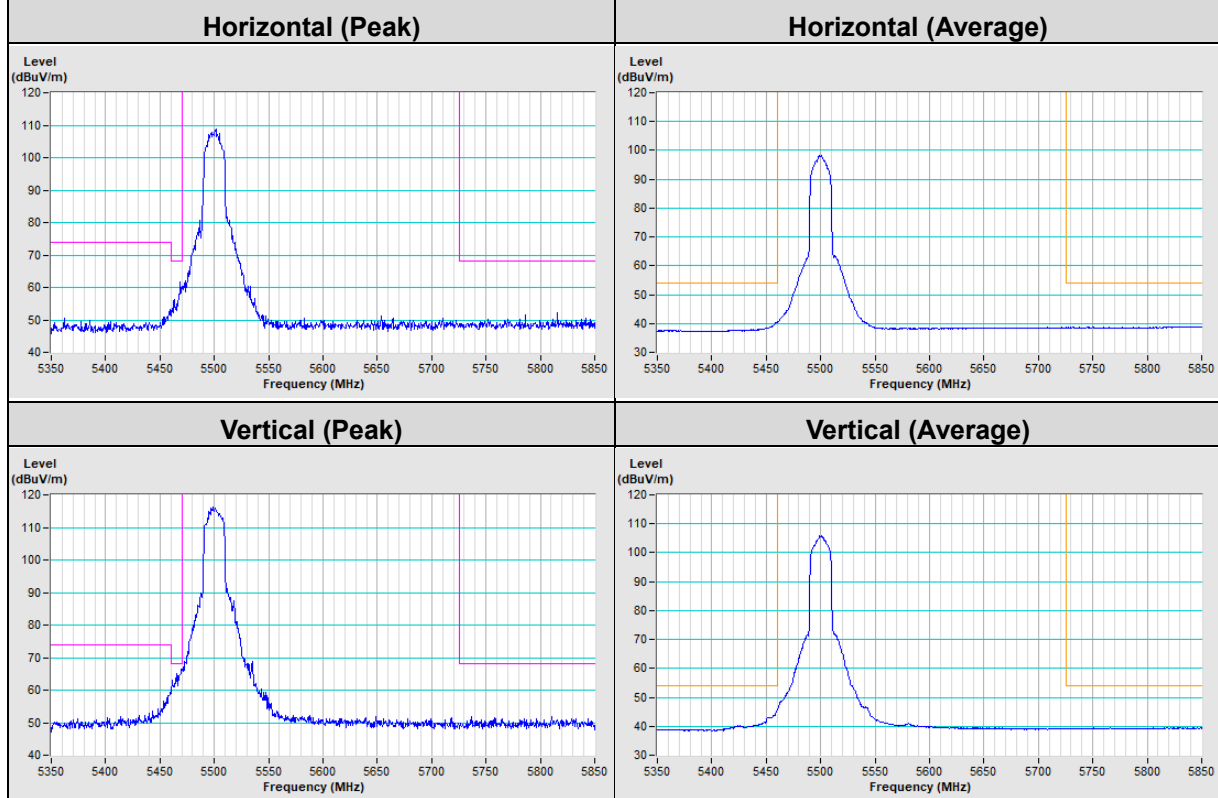

802.11ax (HE20) Channel 149

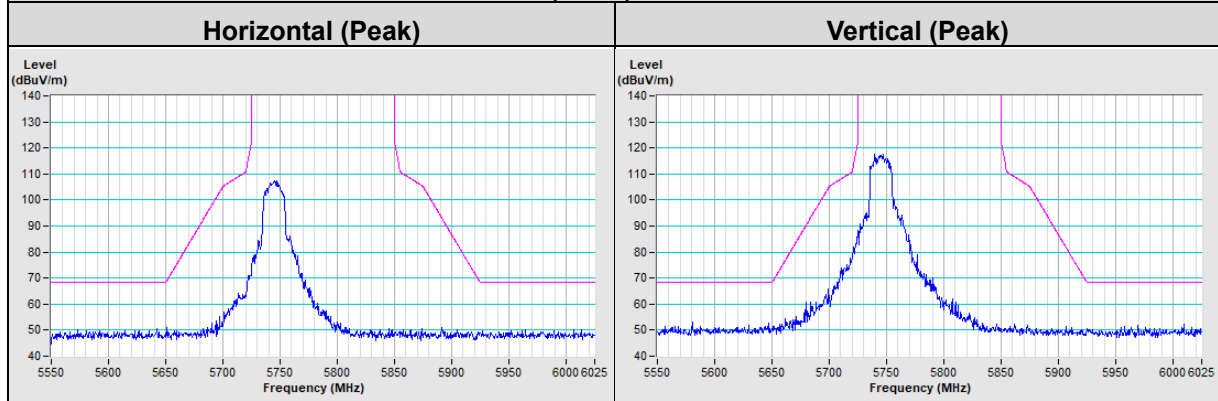

802.11ax (HE20) Channel 157


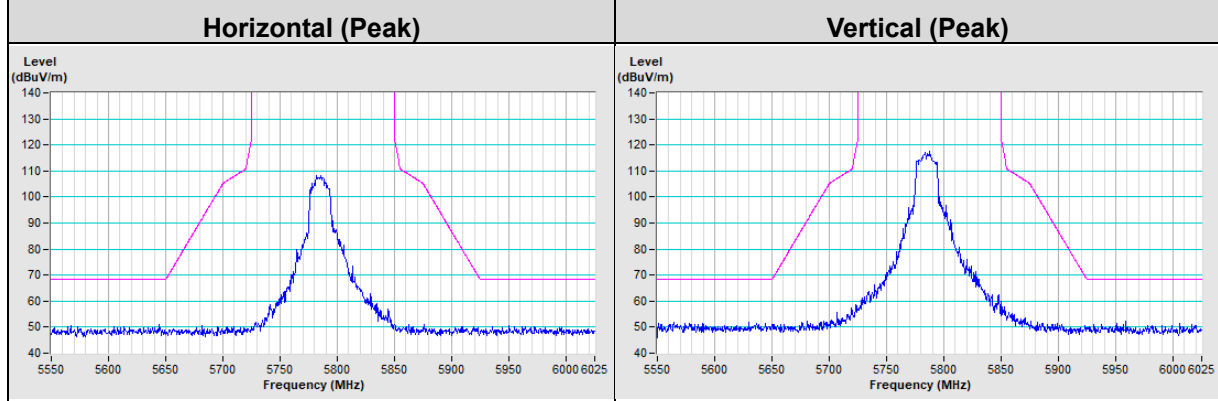






802.11ax (HE20) Channel 165

Horizontal (Peak)



Vertical (Peak)

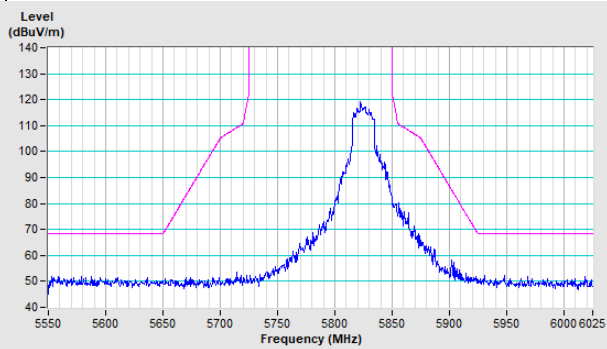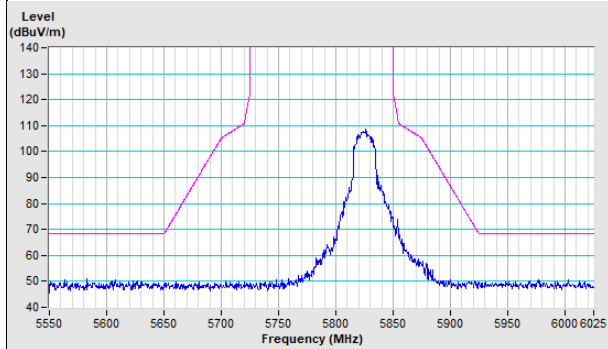


802.11ax (HE40) Channel 38

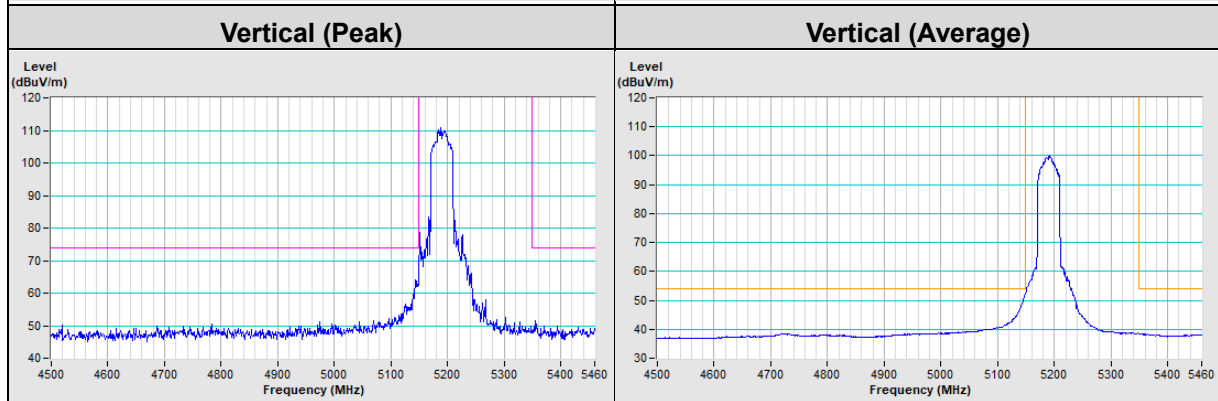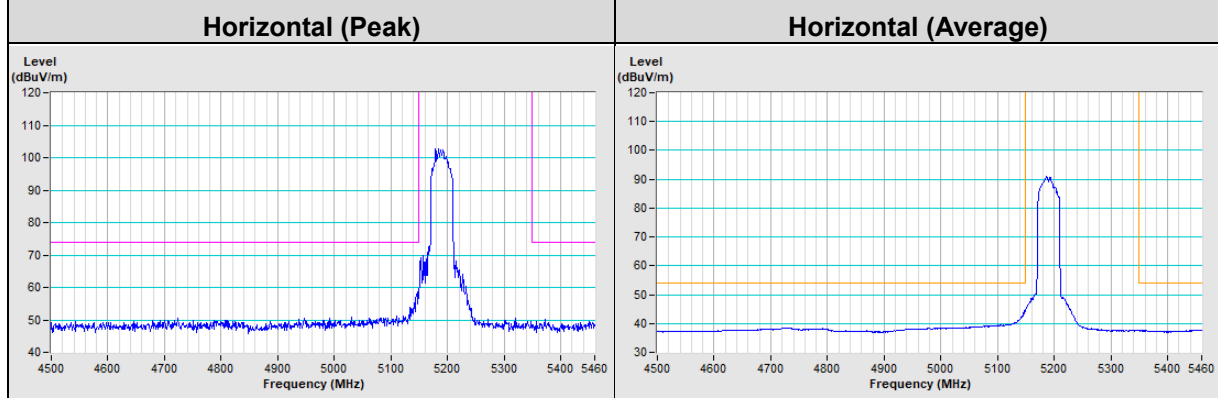


802.11ax (HE40) Channel 62

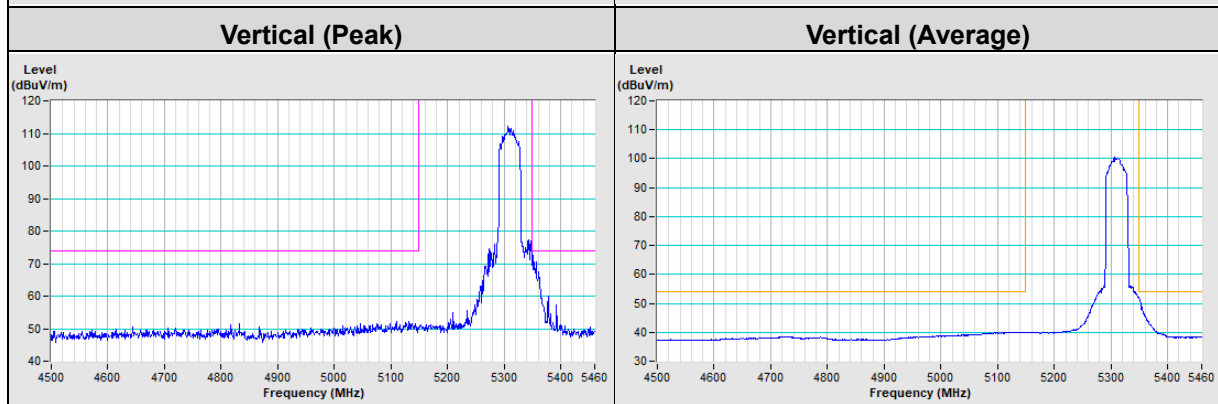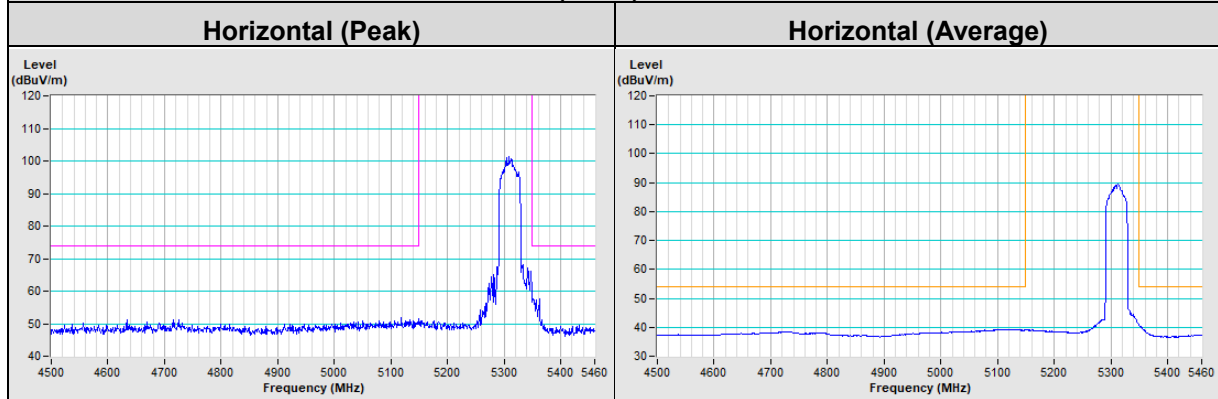


802.11ax (HE40) Channel 102

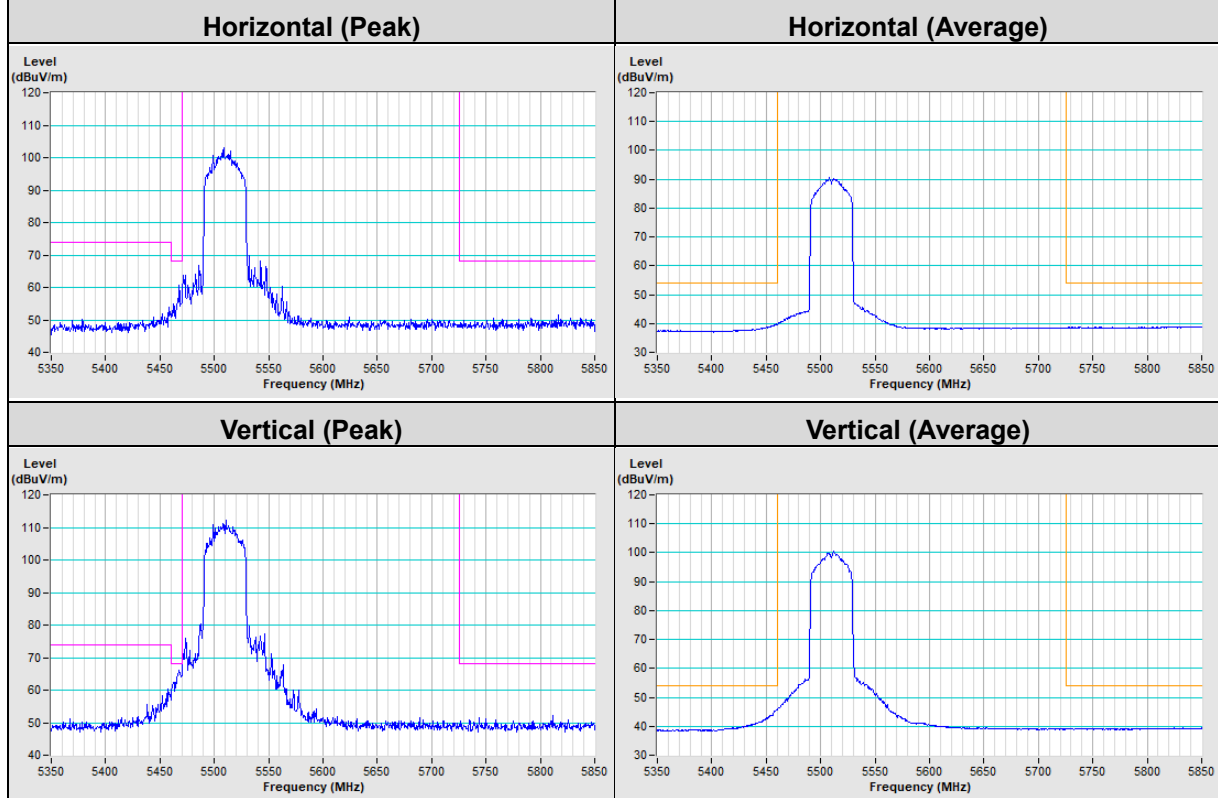

802.11ax (HE40) Channel 151


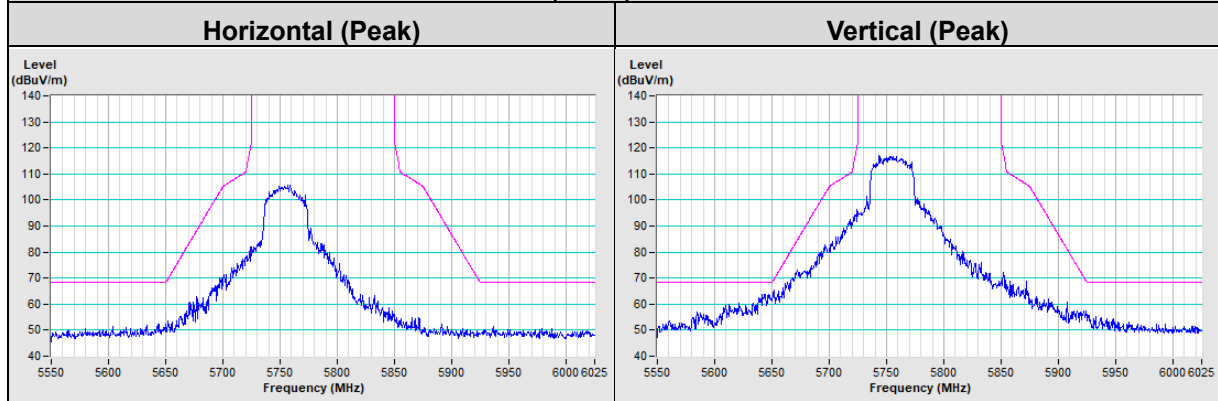


802.11ax (HE40) Channel 159


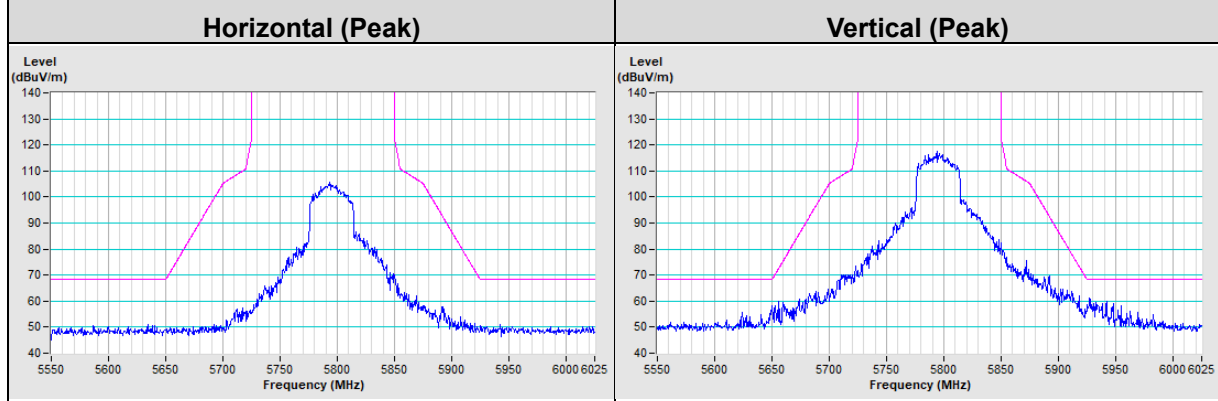


802.11ax (HE80) Channel 42

Horizontal (Peak)	Horizontal (Average)
--------------------------	-----------------------------

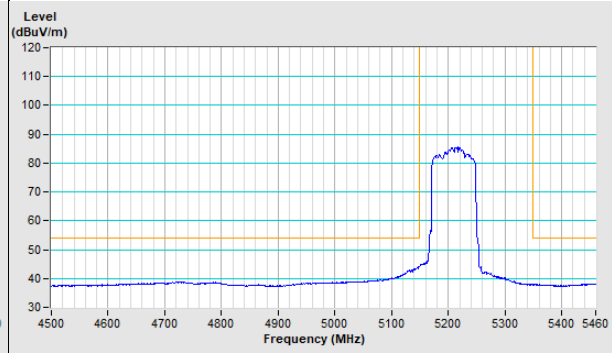
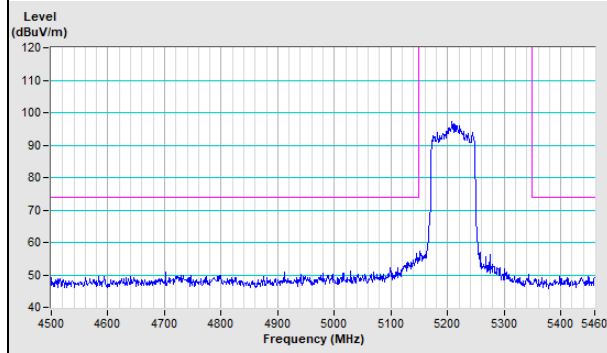


Vertical (Peak)	Vertical (Average)
------------------------	---------------------------

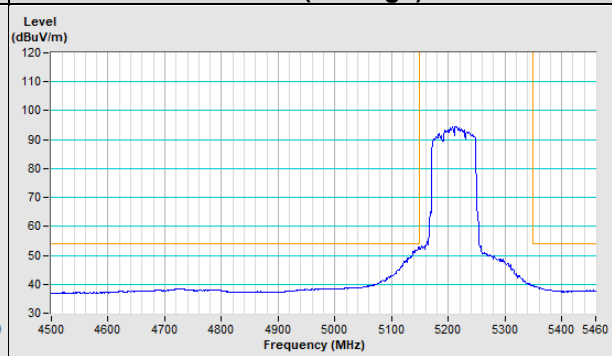
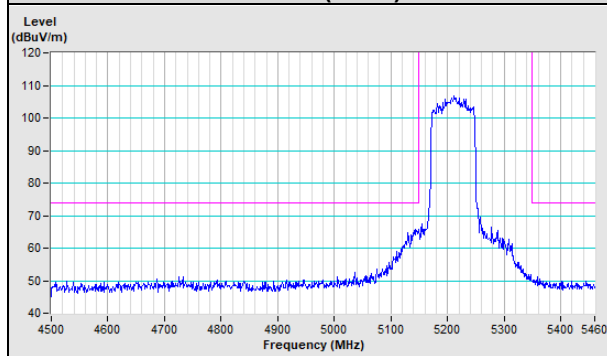



802.11ax (HE80) Channel 58

Horizontal (Peak)	Horizontal (Average)
--------------------------	-----------------------------

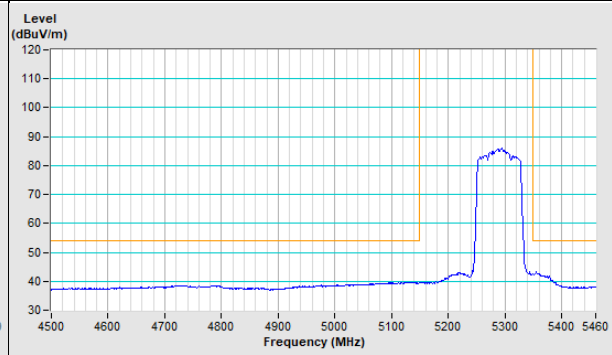
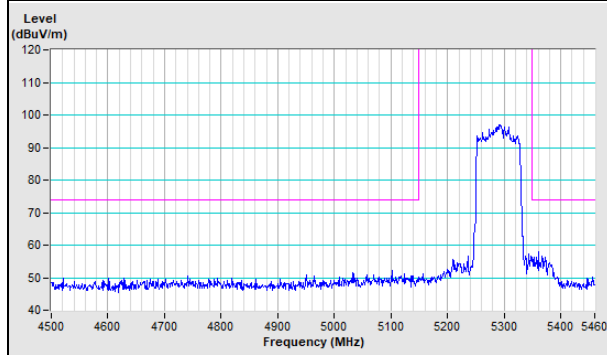


Vertical (Peak)	Vertical (Average)
------------------------	---------------------------

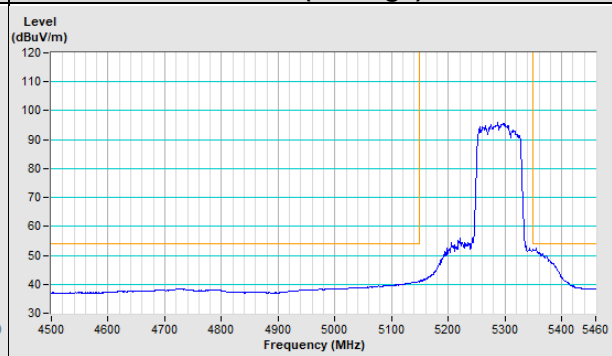
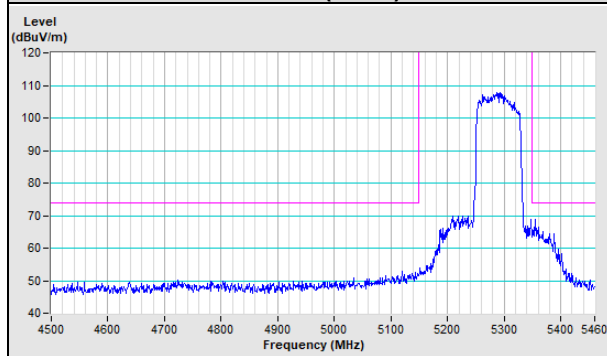


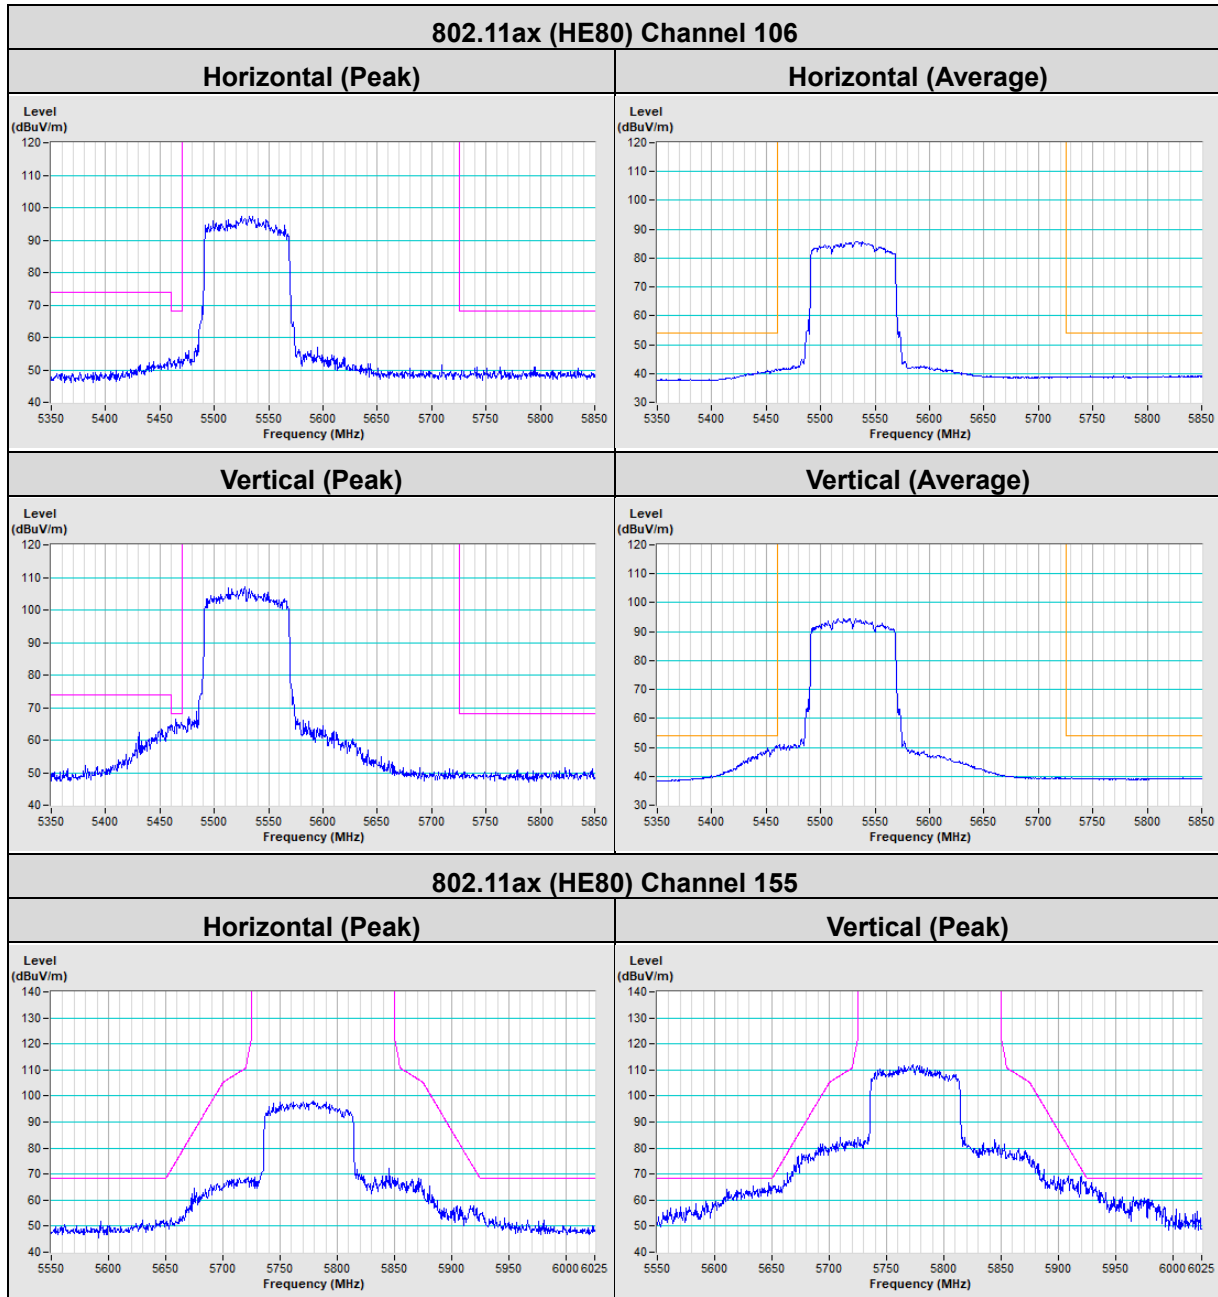

20 MHz Preamble 802.11ax (RU26) Channel 36

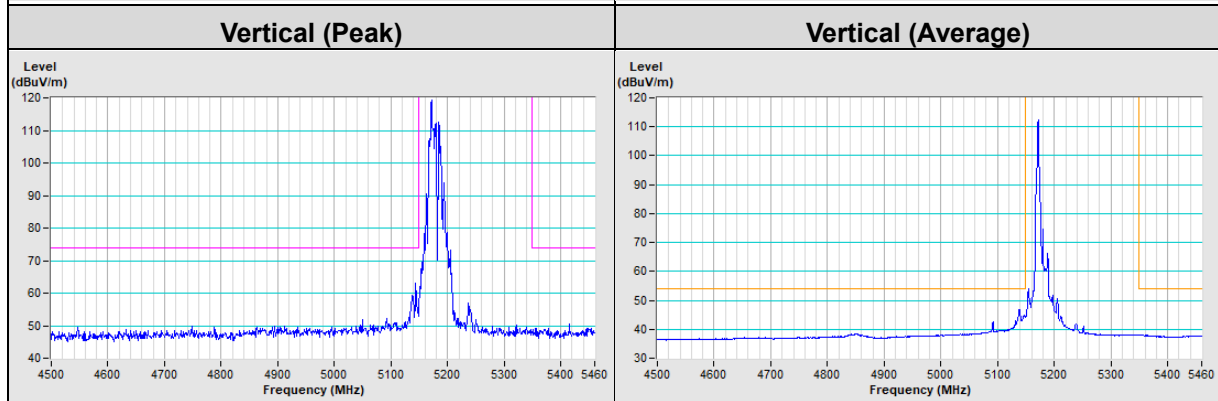
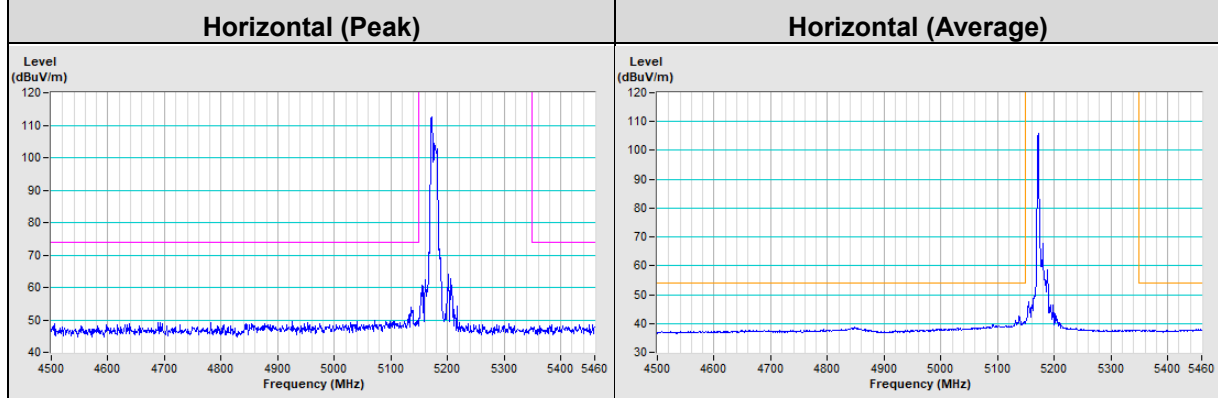


20 MHz Preamble 802.11ax (RU26) Channel 64

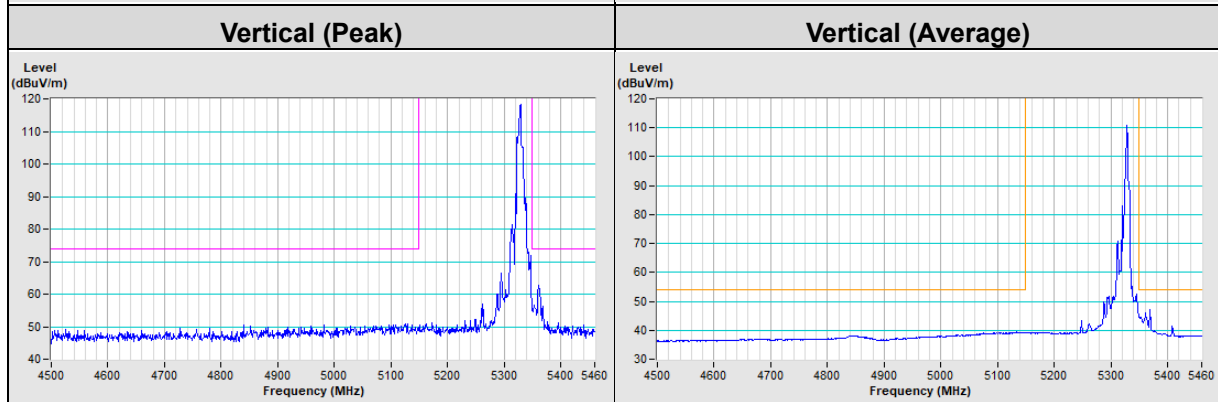
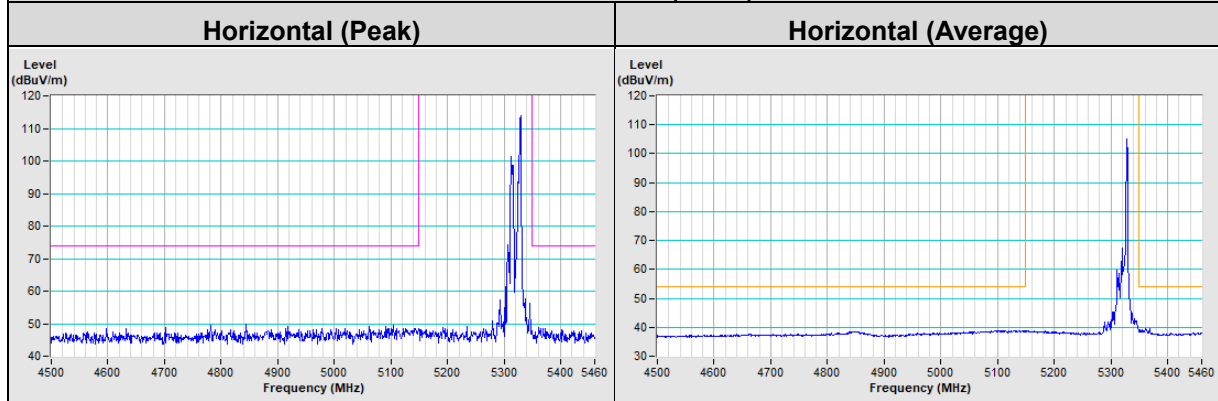


20 MHz Preamble 802.11ax (RU26) Channel 100

Horizontal (Peak) **Horizontal (Average)**

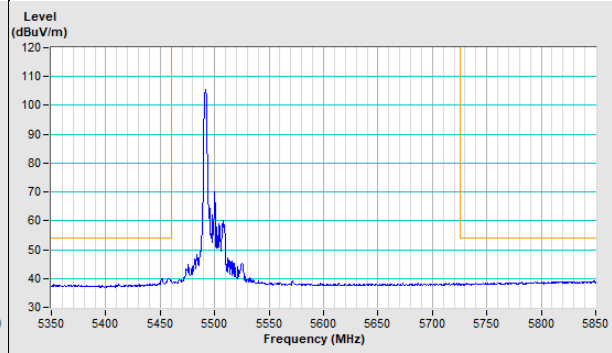
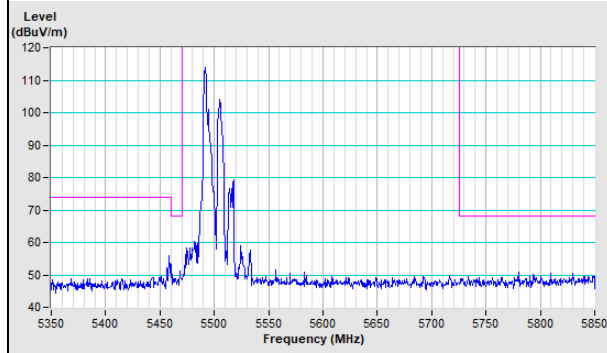


Vertical (Peak) **Vertical (Average)**

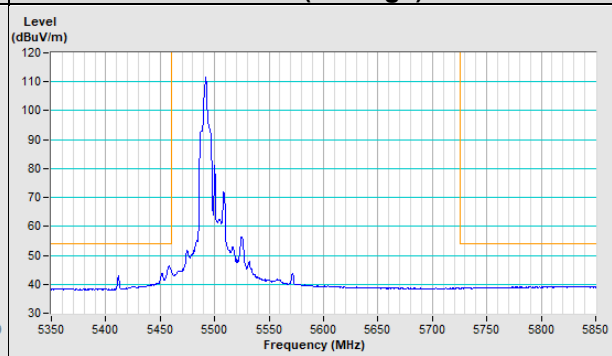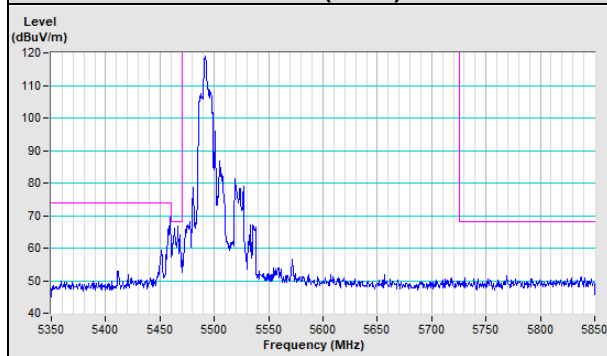



20 MHz Preamble 802.11ax (RU26) Channel 149


Horizontal (Peak) **Vertical (Peak)**

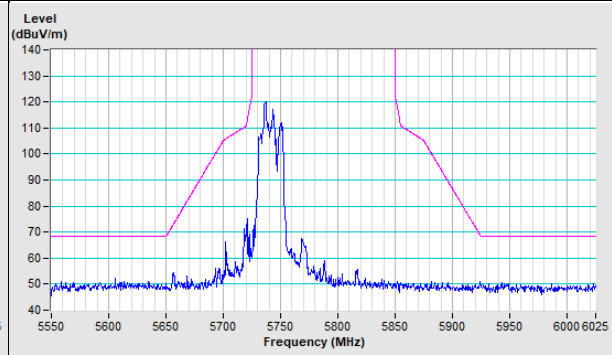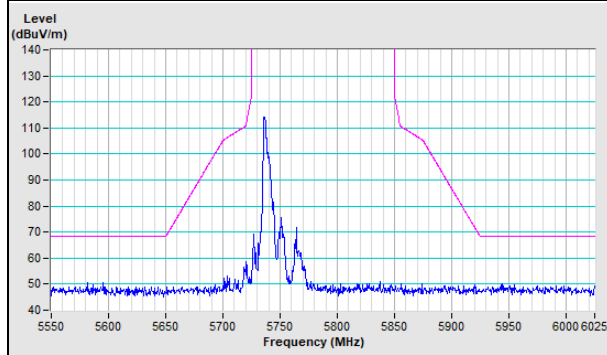

20 MHz Preamble 802.11ax (RU26) Channel 157



Horizontal (Peak) **Vertical (Peak)**

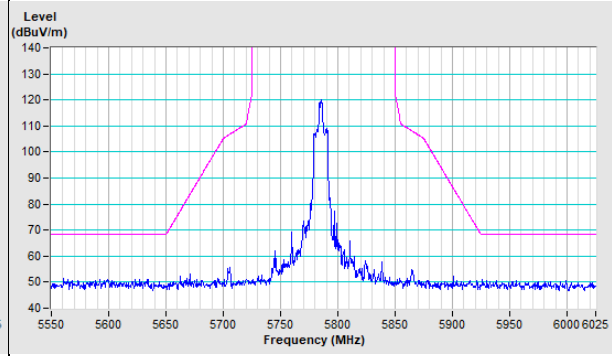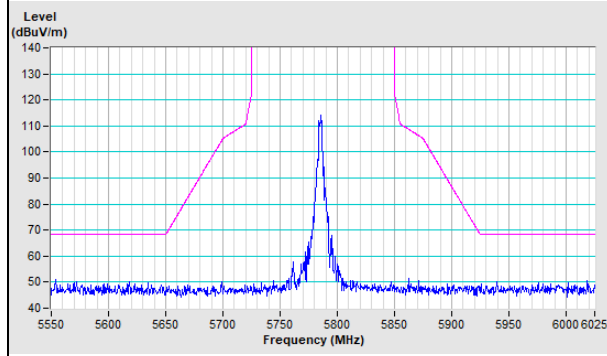

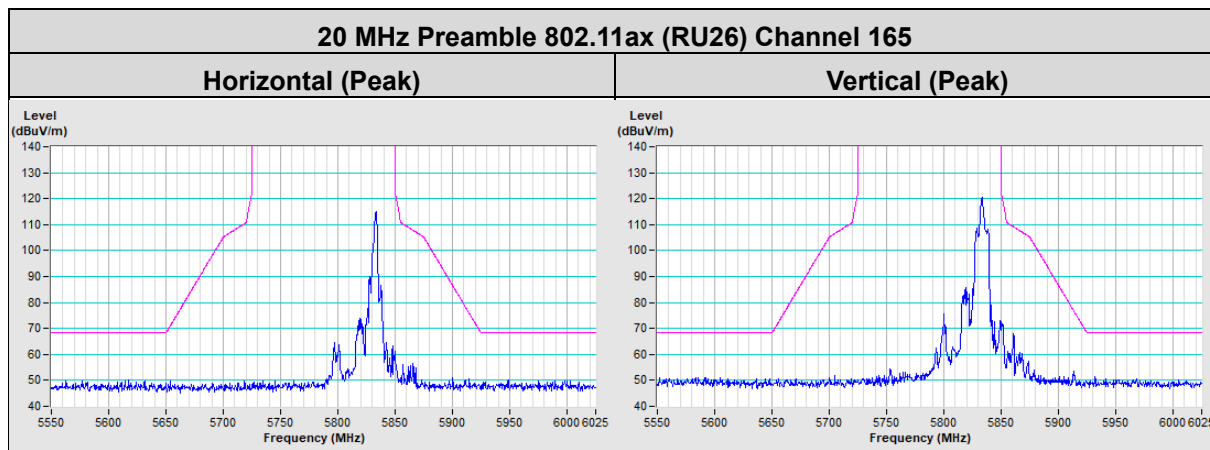



20 MHz Preamble 802.11ax (RU52) Channel 100

Horizontal (Peak) **Horizontal (Average)**

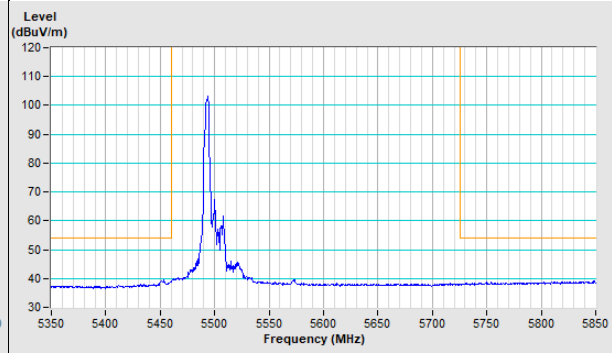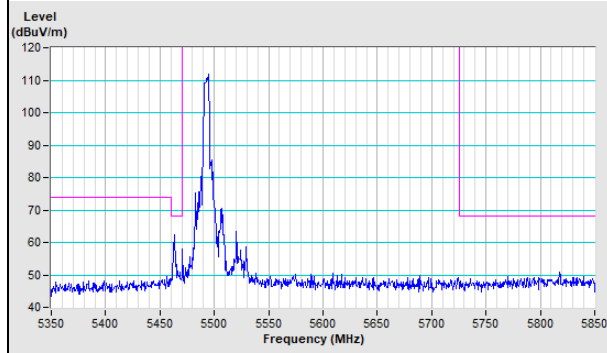

Vertical (Peak)



Vertical (Average)

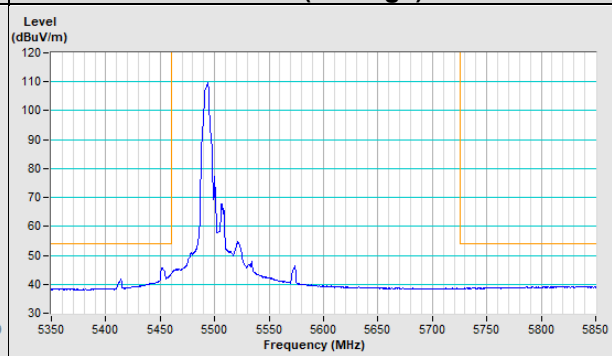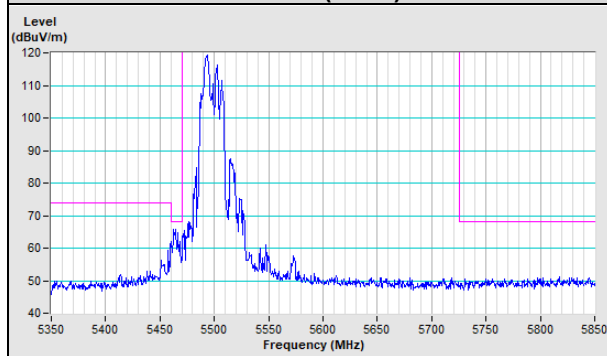

20 MHz Preamble 802.11ax (RU52) Channel 149

Horizontal (Peak)



Vertical (Peak)

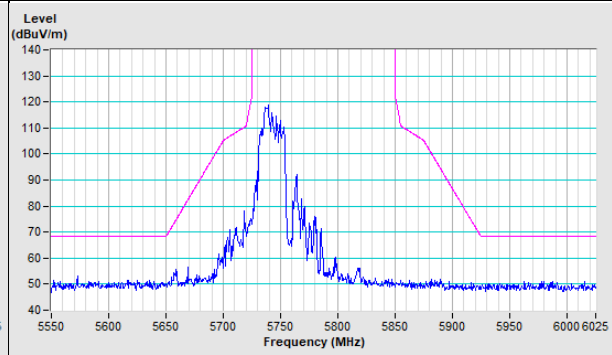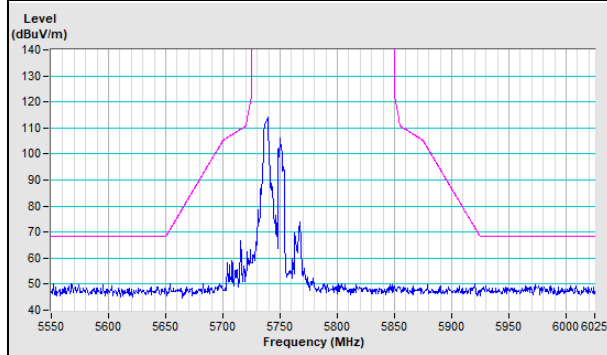


20 MHz Preamble 802.11ax (RU52) Channel 157

Horizontal (Peak)



Vertical (Peak)

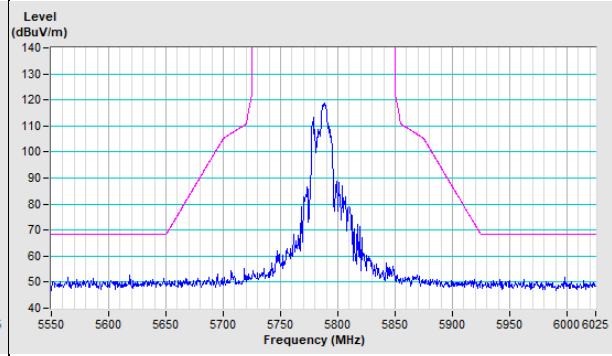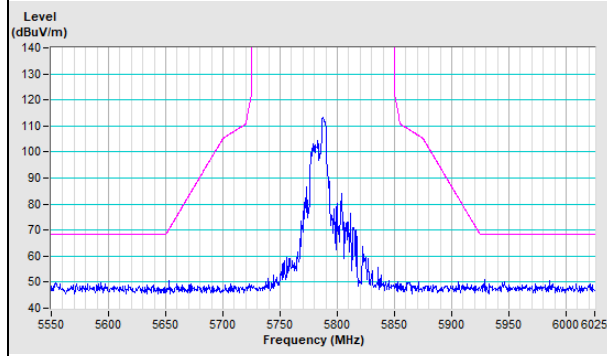


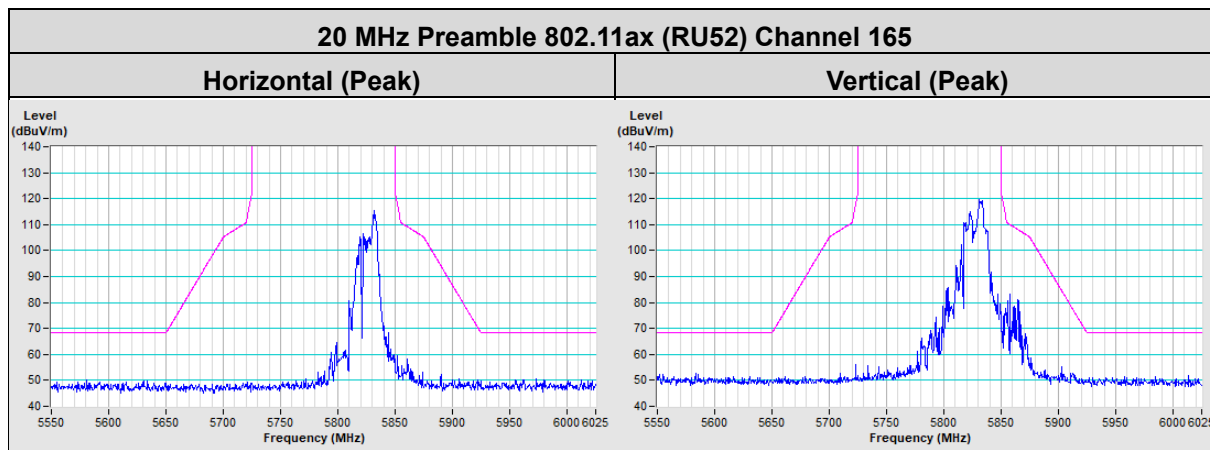


20 MHz Preamble 802.11ax (RU106) Channel 36

Horizontal (Peak) **Horizontal (Average)**

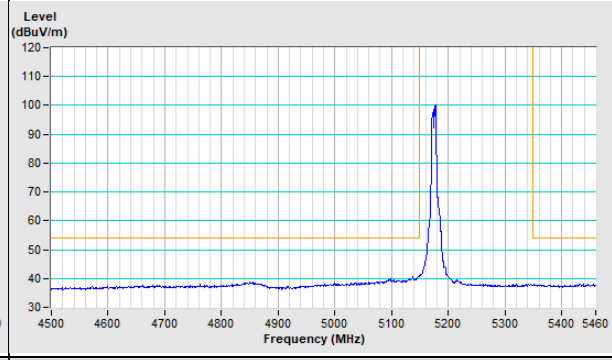
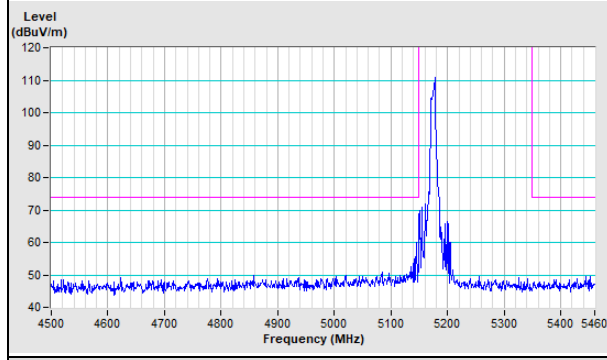


Vertical (Peak) **Vertical (Average)**

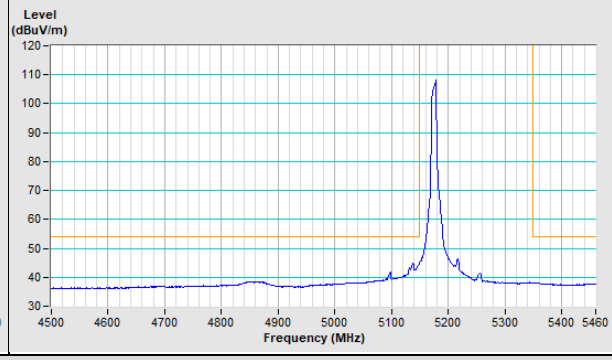
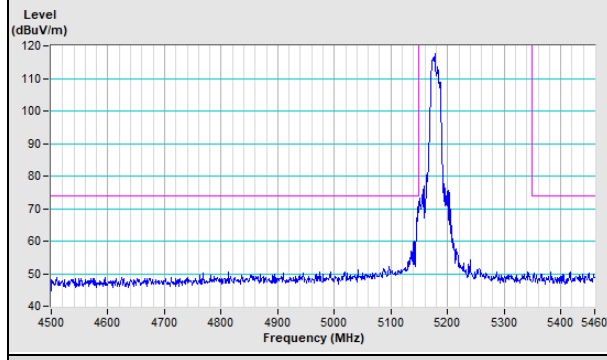



20 MHz Preamble 802.11ax (RU106) Channel 64

Horizontal (Peak) **Horizontal (Average)**

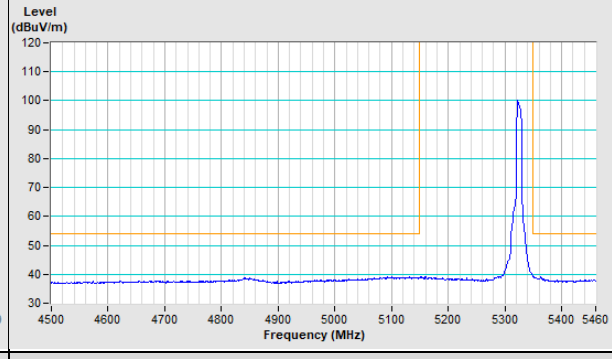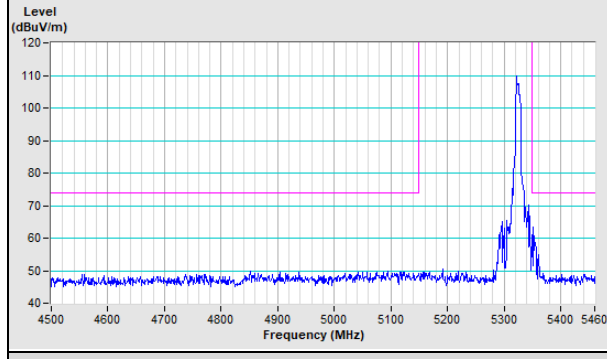

Vertical (Peak) **Vertical (Average)**

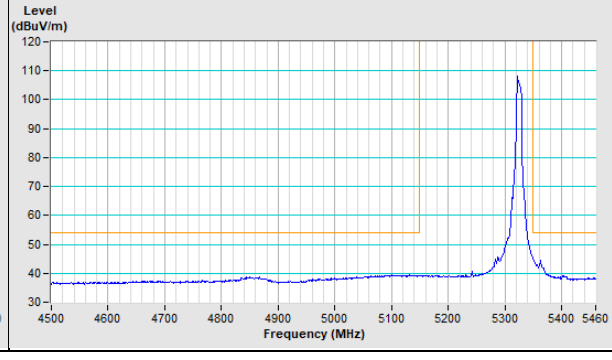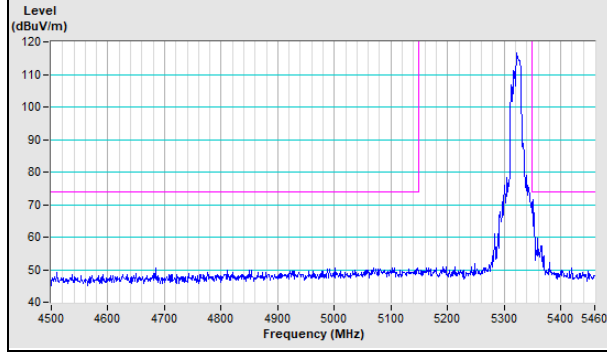

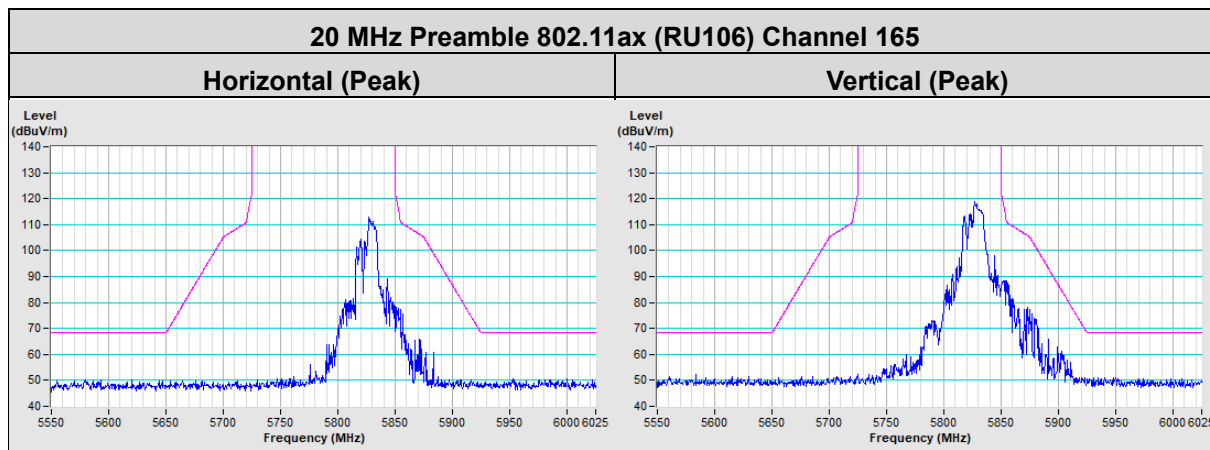


Mode D

RF Mode	TX 802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	5150.00	69.6 PK	74.0	-4.4	1.49 H	174	67.2	2.4
2	5150.00	52.4 AV	54.0	-1.6	1.49 H	174	50.0	2.4
3	*5180.00	114.7 PK			1.49 H	174	112.5	2.2
4	*5180.00	106.4 AV			1.49 H	174	104.2	2.2
5	#10360.00	58.8 PK	68.2	-9.4	1.72 H	265	47.1	11.7
6	15540.00	52.8 PK	74.0	-21.2	3.72 H	90	41.0	11.8
7	15540.00	41.5 AV	54.0	-12.5	3.72 H	90	29.7	11.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

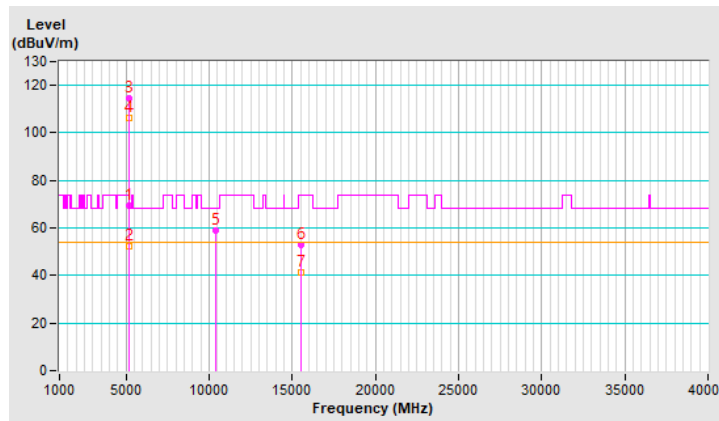




RF Mode	TX 802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.1 PK	74.0	-8.9	1.31 V	149	62.7	2.4
2	5150.00	47.4 AV	54.0	-6.6	1.31 V	149	45.0	2.4
3	*5180.00	110.2 PK			1.31 V	149	108.0	2.2
4	*5180.00	100.8 AV			1.31 V	149	98.6	2.2
5	#10360.00	50.9 PK	68.2	-17.3	3.17 V	218	39.2	11.7
6	15540.00	53.1 PK	74.0	-20.9	3.73 V	324	41.3	11.8
7	15540.00	40.5 AV	54.0	-13.5	3.73 V	324	28.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

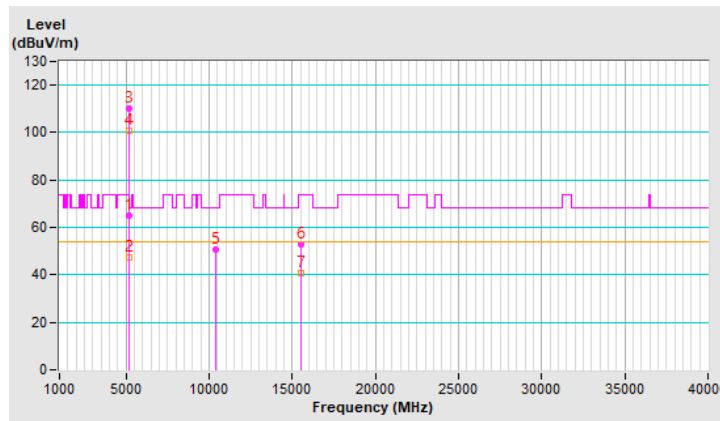


RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.2 PK	74.0	-11.8	1.50 H	175	59.8	2.4
2	5150.00	45.4 AV	54.0	-8.6	1.50 H	175	43.0	2.4
3	*5200.00	116.8 PK			1.50 H	175	114.7	2.1
4	*5200.00	108.5 AV			1.50 H	175	106.4	2.1
5	#10400.00	62.9 PK	68.2	-5.3	1.66 H	280	51.0	11.9
6	15600.00	54.7 PK	74.0	-19.3	3.77 H	89	43.2	11.5
7	15600.00	44.2 AV	54.0	-9.8	3.77 H	89	32.7	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

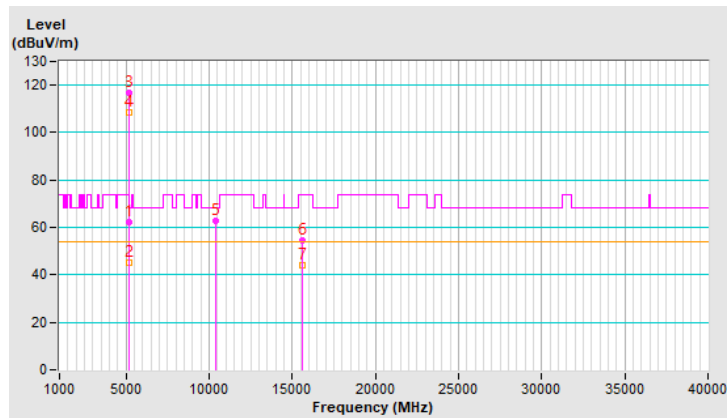


RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.4 PK	74.0	-17.6	1.36 V	161	54.0	2.4
2	5150.00	40.4 AV	54.0	-13.6	1.36 V	161	38.0	2.4
3	*5200.00	112.1 PK			1.36 V	161	110.0	2.1
4	*5200.00	102.7 AV			1.36 V	161	100.6	2.1
5	#10400.00	53.7 PK	68.2	-14.5	3.14 V	232	41.8	11.9
6	15600.00	55.1 PK	74.0	-18.9	3.75 V	321	43.6	11.5
7	15600.00	43.7 AV	54.0	-10.3	3.75 V	321	32.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

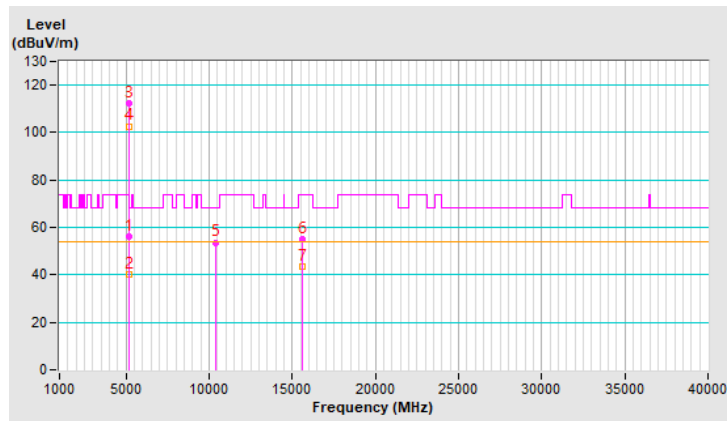


RF Mode	TX 802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.6 PK	74.0	-22.4	1.49 H	172	49.2	2.4
2	5150.00	39.6 AV	54.0	-14.4	1.49 H	172	37.2	2.4
3	*5240.00	116.8 PK			1.49 H	172	114.9	1.9
4	*5240.00	108.0 AV			1.49 H	172	106.1	1.9
5	5350.00	50.8 PK	74.0	-23.2	1.49 H	172	48.8	2.0
6	5350.00	38.5 AV	54.0	-15.5	1.49 H	172	36.5	2.0
7	#10480.00	62.5 PK	68.2	-5.7	1.71 H	291	50.6	11.9
8	15720.00	54.7 PK	74.0	-19.3	3.76 H	82	43.0	11.7
9	15720.00	44.0 AV	54.0	-10.0	3.76 H	82	32.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

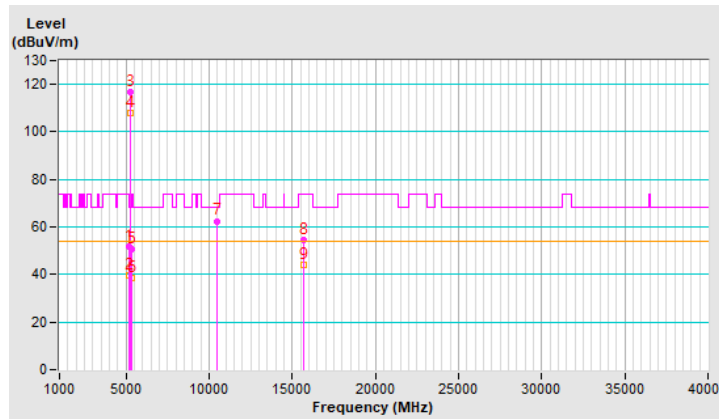


RF Mode	TX 802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.8 PK	74.0	-22.2	1.38 V	158	49.4	2.4
2	5150.00	38.6 AV	54.0	-15.4	1.38 V	158	36.2	2.4
3	*5240.00	111.9 PK			1.38 V	158	110.0	1.9
4	*5240.00	102.4 AV			1.38 V	158	100.5	1.9
5	5350.00	51.1 PK	74.0	-22.9	1.38 V	158	49.1	2.0
6	5350.00	38.2 AV	54.0	-15.8	1.38 V	158	36.2	2.0
7	#10480.00	54.4 PK	68.2	-13.8	3.15 V	228	42.5	11.9
8	15720.00	55.1 PK	74.0	-18.9	3.77 V	324	43.4	11.7
9	15720.00	43.9 AV	54.0	-10.1	3.77 V	324	32.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

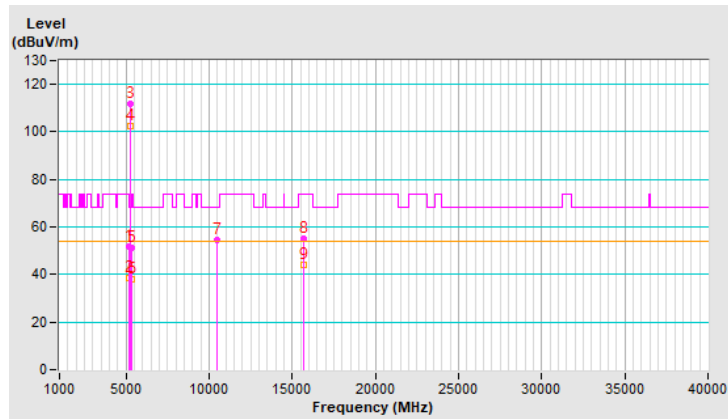


RF Mode	TX 802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.9 PK	74.0	-22.1	1.40 H	173	49.5	2.4
2	5150.00	39.6 AV	54.0	-14.4	1.40 H	173	37.2	2.4
3	*5260.00	116.9 PK			1.40 H	173	115.1	1.8
4	*5260.00	108.1 AV			1.40 H	173	106.3	1.8
5	5350.00	51.2 PK	74.0	-22.8	1.40 H	173	49.2	2.0
6	5350.00	39.2 AV	54.0	-14.8	1.40 H	173	37.2	2.0
7	#10520.00	62.6 PK	68.2	-5.6	1.64 H	268	50.6	12.0
8	15780.00	54.4 PK	74.0	-19.6	3.77 H	91	42.9	11.5
9	15780.00	44.2 AV	54.0	-9.8	3.77 H	91	32.7	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

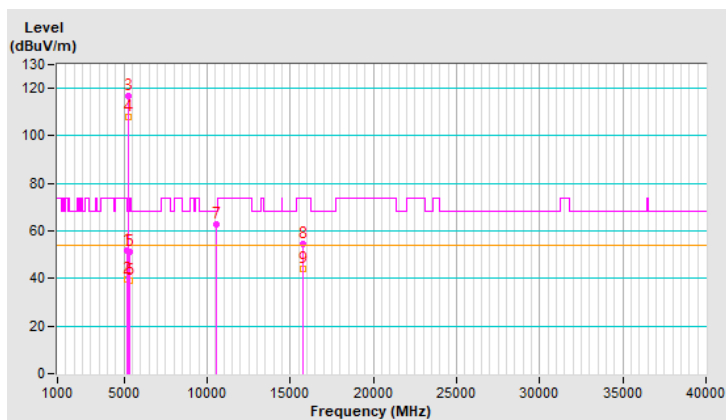


RF Mode	TX 802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.9 PK	74.0	-22.1	1.36 V	148	49.5	2.4
2	5150.00	38.6 AV	54.0	-15.4	1.36 V	148	36.2	2.4
3	*5260.00	112.2 PK			1.36 V	148	110.4	1.8
4	*5260.00	103.0 AV			1.36 V	148	101.2	1.8
5	5350.00	51.3 PK	74.0	-22.7	1.36 V	148	49.3	2.0
6	5350.00	38.4 AV	54.0	-15.6	1.36 V	148	36.4	2.0
7	#10520.00	54.6 PK	68.2	-13.6	3.18 V	234	42.6	12.0
8	15780.00	54.4 PK	74.0	-19.6	3.80 V	324	42.9	11.5
9	15780.00	43.5 AV	54.0	-10.5	3.80 V	324	32.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

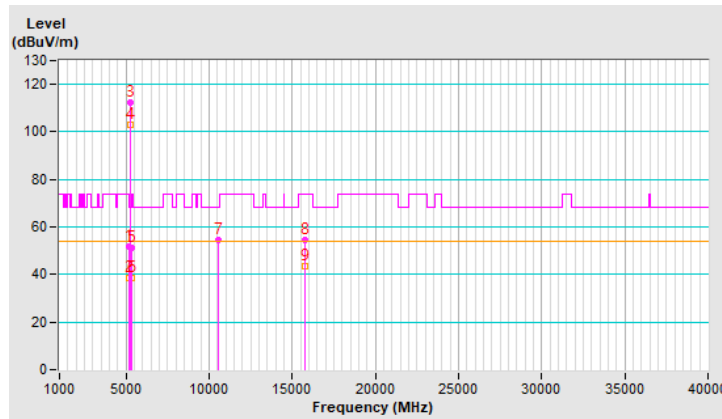




RF Mode	TX 802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	117.3 PK			1.45 H	169	115.6	1.7
2	*5300.00	108.7 AV			1.45 H	169	107.0	1.7
3	5350.00	67.9 PK	74.0	-6.1	1.45 H	169	65.9	2.0
4	5350.00	45.8 AV	54.0	-8.2	1.45 H	169	43.8	2.0
5	10600.00	62.6 PK	74.0	-11.4	1.69 H	288	50.9	11.7
6	10600.00	48.1 AV	54.0	-5.9	1.69 H	288	36.4	11.7
7	15900.00	54.8 PK	74.0	-19.2	3.71 H	77	43.7	11.1
8	15900.00	44.6 AV	54.0	-9.4	3.71 H	77	33.5	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

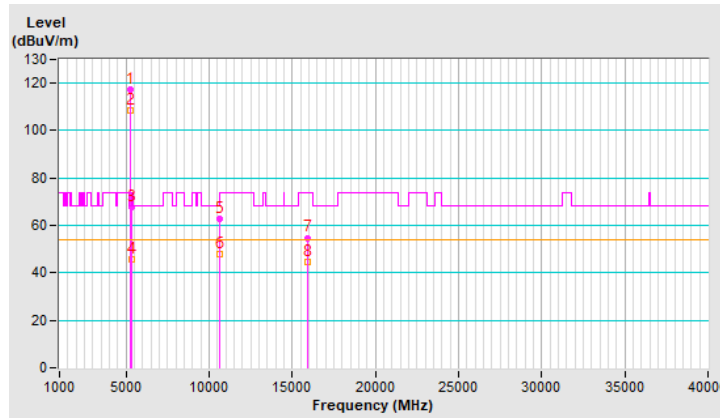




RF Mode	TX 802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	112.1 PK			1.35 V	161	110.4	1.7
2	*5300.00	103.7 AV			1.35 V	161	102.0	1.7
3	5350.00	56.5 PK	74.0	-17.5	1.35 V	161	54.5	2.0
4	5350.00	40.6 AV	54.0	-13.4	1.35 V	161	38.6	2.0
5	10600.00	54.4 PK	74.0	-19.6	3.14 V	232	42.7	11.7
6	10600.00	41.8 AV	54.0	-12.2	3.14 V	232	30.1	11.7
7	15900.00	55.7 PK	74.0	-18.3	3.72 V	309	44.6	11.1
8	15900.00	44.3 AV	54.0	-9.7	3.72 V	309	33.2	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

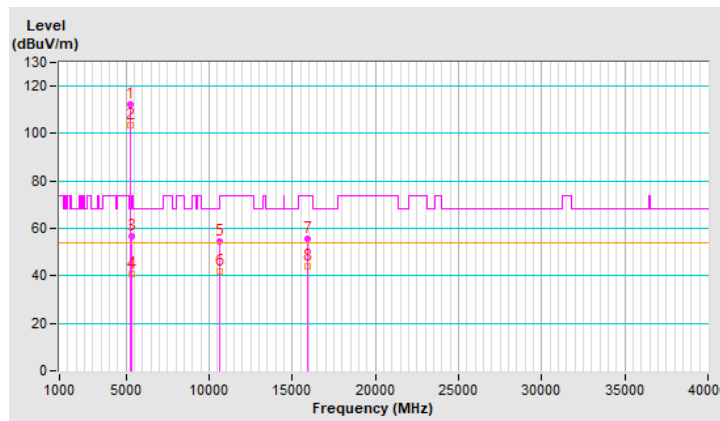


RF Mode	TX 802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	116.5 PK			1.20 H	180	114.8	1.7
2	*5320.00	106.5 AV			1.20 H	180	104.8	1.7
3	5350.00	68.1 PK	74.0	-5.9	1.20 H	180	66.1	2.0
4	5350.00	52.4 AV	54.0	-1.6	1.20 H	180	50.4	2.0
5	10640.00	56.5 PK	74.0	-17.5	1.73 H	282	44.9	11.6
6	10640.00	44.8 AV	54.0	-9.2	1.73 H	282	33.2	11.6
7	15960.00	50.4 PK	74.0	-23.6	3.74 H	89	39.0	11.4
8	15960.00	39.7 AV	54.0	-14.3	3.74 H	89	28.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

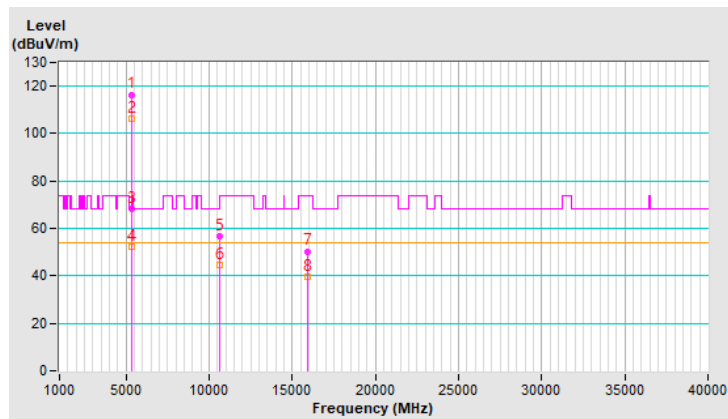


RF Mode	TX 802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.3 PK			3.02 V	133	110.6	1.7
2	*5320.00	103.0 AV			3.02 V	133	101.3	1.7
3	5350.00	64.1 PK	74.0	-9.9	3.02 V	133	62.1	2.0
4	5350.00	46.0 AV	54.0	-8.0	3.02 V	133	44.0	2.0
5	10640.00	51.1 PK	74.0	-22.9	3.20 V	226	39.5	11.6
6	10640.00	39.7 AV	54.0	-14.3	3.20 V	226	28.1	11.6
7	15960.00	52.0 PK	74.0	-22.0	3.68 V	295	40.6	11.4
8	15960.00	41.6 AV	54.0	-12.4	3.68 V	295	30.2	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

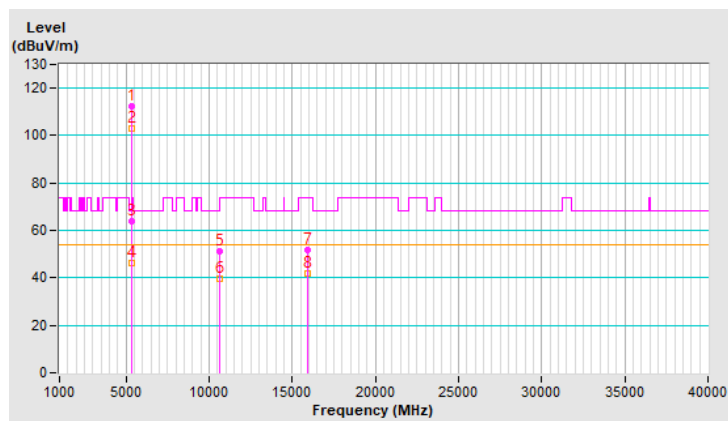


RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.4 PK	74.0	-17.6	1.00 H	286	54.2	2.2
2	5460.00	42.0 AV	54.0	-12.0	1.00 H	286	39.8	2.2
3	#5466.70	66.2 PK	68.2	-2.0	1.00 H	286	64.0	2.2
4	*5500.00	113.8 PK			1.00 H	286	111.7	2.1
5	*5500.00	103.9 AV			1.00 H	286	101.8	2.1
6	11000.00	56.3 PK	74.0	-17.7	1.76 H	290	44.2	12.1
7	11000.00	44.4 AV	54.0	-9.6	1.76 H	290	32.3	12.1
8	#16500.00	50.2 PK	68.2	-18.0	3.78 H	80	36.8	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

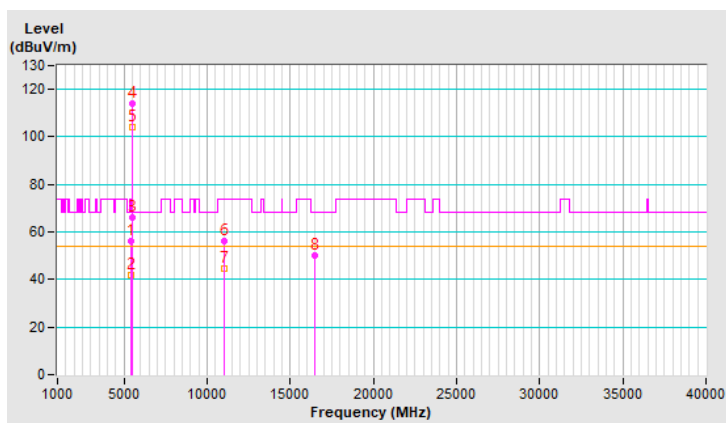




RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.5 PK	74.0	-21.5	1.38 V	138	50.3	2.2
2	5460.00	39.8 AV	54.0	-14.2	1.38 V	138	37.6	2.2
3	#5466.50	62.2 PK	68.2	-6.0	1.38 V	138	60.0	2.2
4	*5500.00	109.7 PK			1.38 V	138	107.6	2.1
5	*5500.00	99.5 AV			1.38 V	138	97.4	2.1
6	11000.00	51.2 PK	74.0	-22.8	3.16 V	227	39.1	12.1
7	11000.00	39.9 AV	54.0	-14.1	3.16 V	227	27.8	12.1
8	#16500.00	52.2 PK	68.2	-16.0	3.69 V	288	38.8	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

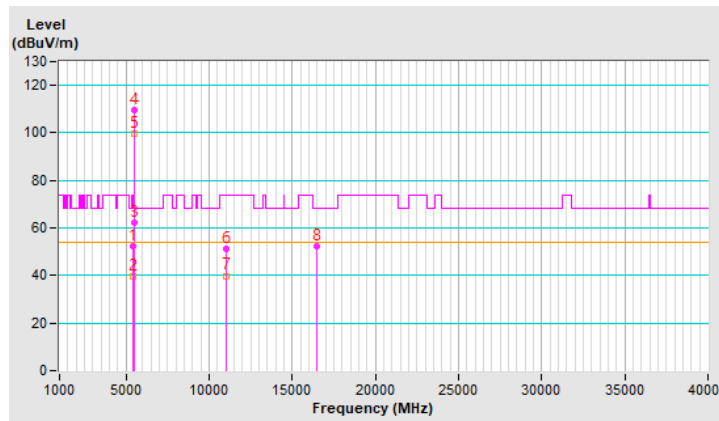


RF Mode	TX 802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	116.2 PK			1.32 H	174	114.0	2.2
2	*5580.00	107.5 AV			1.32 H	174	105.3	2.2
3	11160.00	60.6 PK	74.0	-13.4	1.68 H	279	48.7	11.9
4	11160.00	46.8 AV	54.0	-7.2	1.68 H	279	34.9	11.9
5	#16740.00	55.0 PK	68.2	-13.2	3.65 H	74	39.8	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

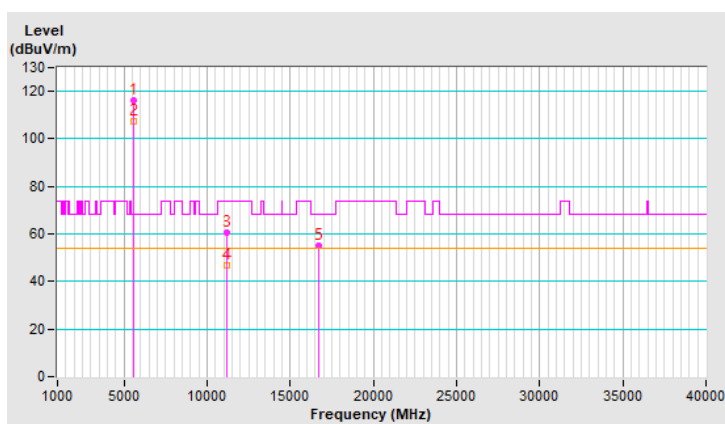


RF Mode	TX 802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	111.8 PK			1.32 V	171	109.6	2.2
2	*5580.00	102.6 AV			1.32 V	171	100.4	2.2
3	11160.00	50.5 PK	74.0	-23.5	3.18 V	222	38.6	11.9
4	11160.00	39.2 AV	54.0	-14.8	3.18 V	222	27.3	11.9
5	#16740.00	51.9 PK	68.2	-16.3	3.70 V	303	36.7	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

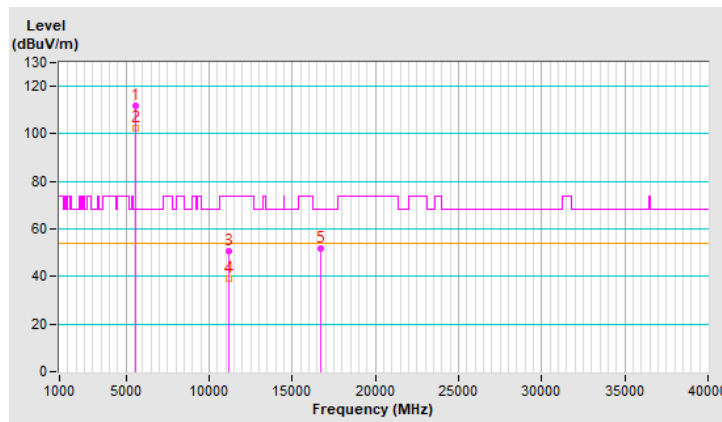


RF Mode	TX 802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.6 PK			1.55 H	178	110.3	2.3
2	*5700.00	103.8 AV			1.55 H	178	101.5	2.3
3	#5725.00	66.4 PK	68.2	-1.8	1.55 H	178	63.9	2.5
4	11400.00	56.2 PK	74.0	-17.8	1.70 H	287	44.0	12.2
5	11400.00	44.4 AV	54.0	-9.6	1.70 H	287	32.2	12.2
6	#17100.00	50.6 PK	68.2	-17.6	3.74 H	100	34.0	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

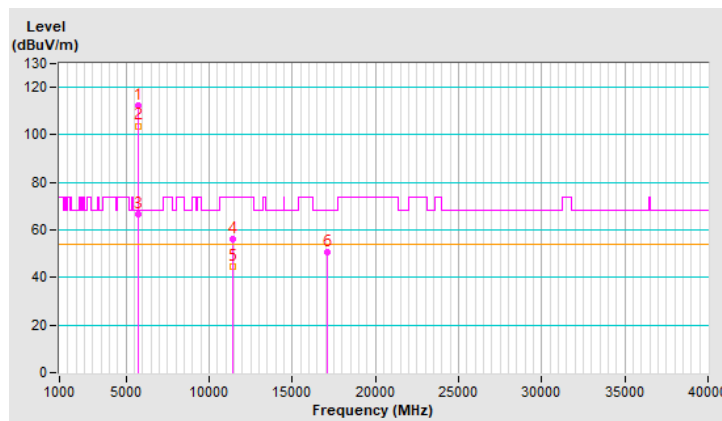


RF Mode	TX 802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.9 PK			1.33 V	125	107.6	2.3
2	*5700.00	99.7 AV			1.33 V	125	97.4	2.3
3	#5725.00	61.6 PK	68.2	-6.6	1.33 V	125	59.1	2.5
4	11400.00	51.1 PK	74.0	-22.9	3.16 V	233	38.9	12.2
5	11400.00	39.7 AV	54.0	-14.3	3.16 V	233	27.5	12.2
6	#17100.00	52.6 PK	68.2	-15.6	3.72 V	273	36.0	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

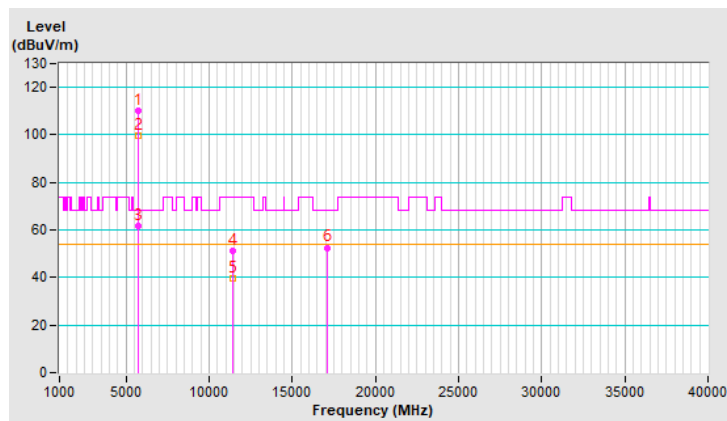


RF Mode	TX 802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.5 PK	74.0	-22.5	1.52 H	178	49.3	2.2
2	5460.00	38.9 AV	54.0	-15.1	1.52 H	178	36.7	2.2
3	#5470.00	51.6 PK	68.2	-16.6	1.52 H	178	49.4	2.2
4	*5720.00	117.2 PK			1.52 H	178	114.8	2.4
5	*5720.00	108.3 AV			1.52 H	178	105.9	2.4
6	#5850.00	51.5 PK	68.2	-16.7	1.52 H	178	48.6	2.9
7	11440.00	59.2 PK	74.0	-14.8	1.72 H	280	47.0	12.2
8	11440.00	46.3 AV	54.0	-7.7	1.72 H	280	34.1	12.2
9	#17160.00	54.4 PK	68.2	-13.8	3.62 H	65	37.9	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

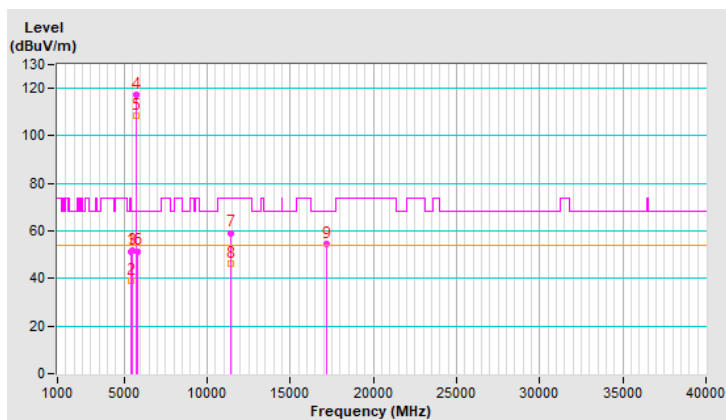


RF Mode	TX 802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.9 PK	74.0	-23.1	1.33 V	130	48.7	2.2
2	5460.00	38.7 AV	54.0	-15.3	1.33 V	130	36.5	2.2
3	#5470.00	51.4 PK	68.2	-16.8	1.33 V	130	49.2	2.2
4	*5720.00	115.4 PK			1.33 V	130	113.0	2.4
5	*5720.00	104.5 AV			1.33 V	130	102.1	2.4
6	#5850.00	51.2 PK	68.2	-17.0	1.33 V	130	48.3	2.9
7	11440.00	50.9 PK	74.0	-23.1	3.15 V	236	38.7	12.2
8	11440.00	39.3 AV	54.0	-14.7	3.15 V	236	27.1	12.2
9	#17160.00	52.7 PK	68.2	-15.5	3.63 V	292	36.2	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

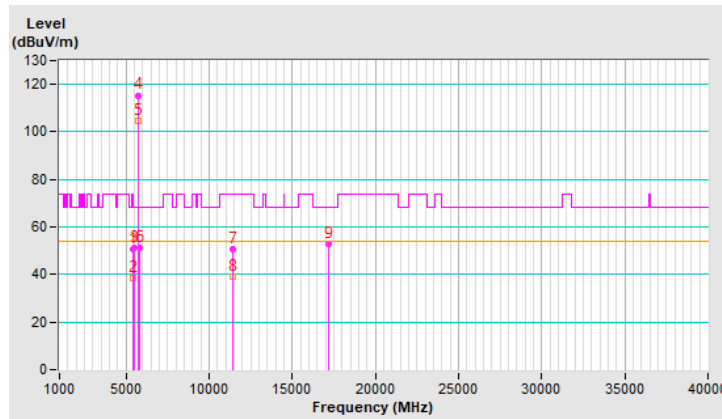


RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5617.02	51.5 PK	68.2	-16.7	1.23 H	179	49.3	2.2
2	*5745.00	116.8 PK			1.23 H	179	114.3	2.5
3	*5745.00	108.0 AV			1.23 H	179	105.5	2.5
4	#5982.30	50.4 PK	68.2	-17.8	1.23 H	179	47.5	2.9
5	11490.00	52.5 PK	74.0	-21.5	2.02 H	304	40.1	12.4
6	11490.00	41.7 AV	54.0	-12.3	2.02 H	304	29.3	12.4
7	#17235.00	58.3 PK	68.2	-9.9	1.60 H	78	41.6	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

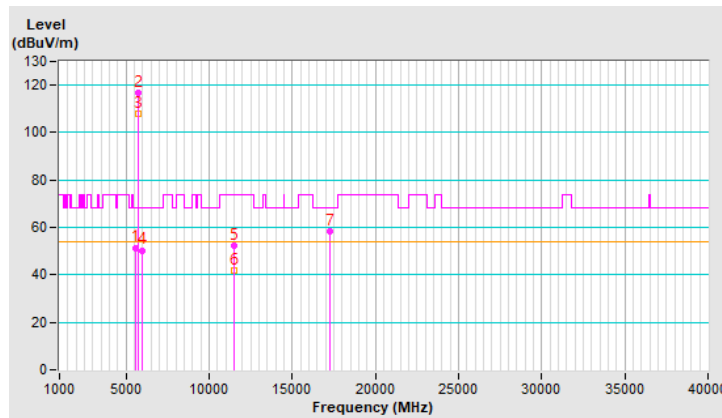




RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.27	50.8 PK	68.2	-17.4	3.69 V	166	48.5	2.3
2	*5745.00	112.6 PK			3.69 V	166	110.1	2.5
3	*5745.00	103.4 AV			3.69 V	166	100.9	2.5
4	#5979.04	51.2 PK	68.2	-17.0	3.69 V	166	48.3	2.9
5	11490.00	49.6 PK	74.0	-24.4	1.99 V	302	37.2	12.4
6	11490.00	38.8 AV	54.0	-15.2	1.99 V	302	26.4	12.4
7	#17235.00	49.6 PK	68.2	-18.6	1.50 V	319	32.9	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

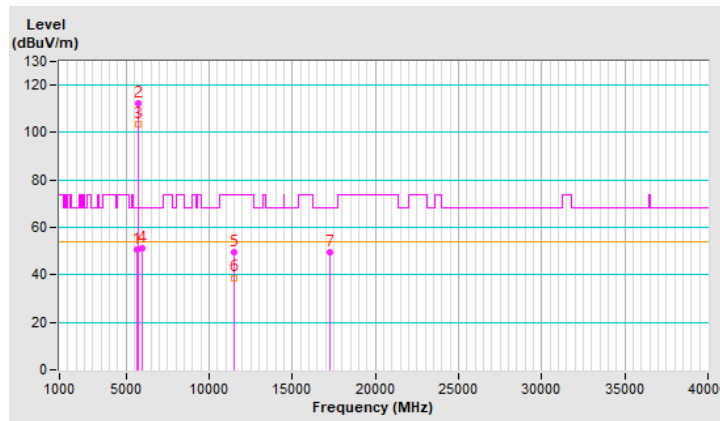


RF Mode	TX 802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5606.68	52.1 PK	68.2	-16.1	1.46 H	176	49.9	2.2
2	*5785.00	115.5 PK			1.46 H	176	112.8	2.7
3	*5785.00	107.0 AV			1.46 H	176	104.3	2.7
4	#6008.47	50.6 PK	68.2	-17.6	1.46 H	176	47.7	2.9
5	11570.00	52.5 PK	74.0	-21.5	2.02 H	306	40.1	12.4
6	11570.00	41.9 AV	54.0	-12.1	2.02 H	306	29.5	12.4
7	#17355.00	57.7 PK	68.2	-10.5	1.57 H	62	40.1	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

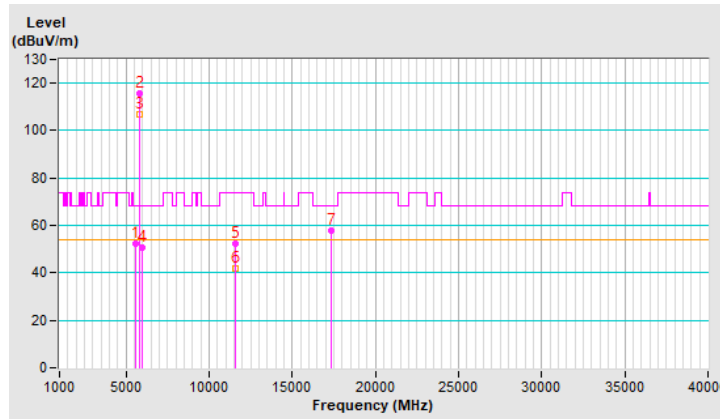




RF Mode	TX 802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5550.99	50.4 PK	68.2	-17.8	3.80 V	145	48.2	2.2
2	*5785.00	112.3 PK			3.80 V	145	109.6	2.7
3	*5785.00	103.1 AV			3.80 V	145	100.4	2.7
4	#5946.19	51.2 PK	68.2	-17.0	3.80 V	145	48.3	2.9
5	11570.00	49.5 PK	74.0	-24.5	2.00 V	313	37.1	12.4
6	11570.00	38.7 AV	54.0	-15.3	2.00 V	313	26.3	12.4
7	#17355.00	49.3 PK	68.2	-18.9	1.46 V	334	31.7	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

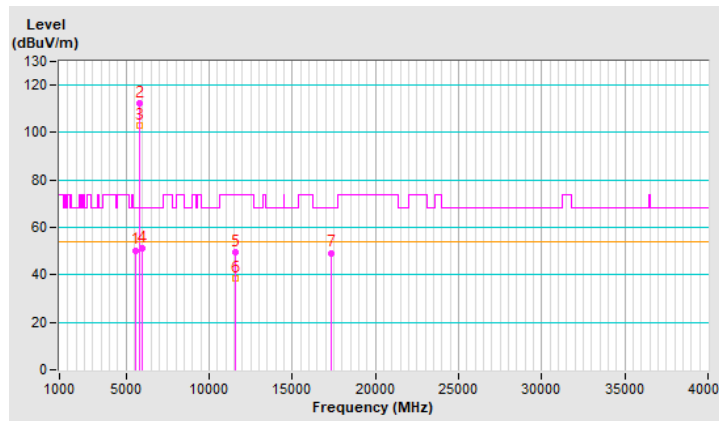




RF Mode	TX 802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5645.17	51.3 PK	68.2	-16.9	1.88 H	285	49.0	2.3
2	*5825.00	116.8 PK			1.88 H	285	114.0	2.8
3	*5825.00	108.2 AV			1.88 H	285	105.4	2.8
4	#5925.51	52.1 PK	68.2	-16.1	1.88 H	285	49.2	2.9
5	11650.00	53.2 PK	74.0	-20.8	2.04 H	319	41.3	11.9
6	11650.00	42.1 AV	54.0	-11.9	2.04 H	319	30.2	11.9
7	#17475.00	57.9 PK	68.2	-10.3	1.59 H	76	39.4	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

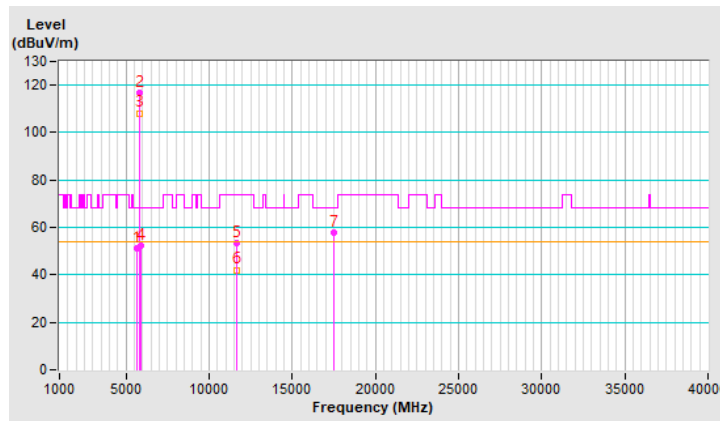


RF Mode	TX 802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5622.98	50.5 PK	68.2	-17.7	3.72 V	139	48.3	2.2
2	*5825.00	111.5 PK			3.72 V	139	108.7	2.8
3	*5825.00	102.3 AV			3.72 V	139	99.5	2.8
4	#5960.55	51.6 PK	68.2	-16.6	3.72 V	139	48.7	2.9
5	11650.00	49.8 PK	74.0	-24.2	2.00 V	309	37.9	11.9
6	11650.00	39.1 AV	54.0	-14.9	2.00 V	309	27.2	11.9
7	#17475.00	49.2 PK	68.2	-19.0	1.44 V	311	30.7	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

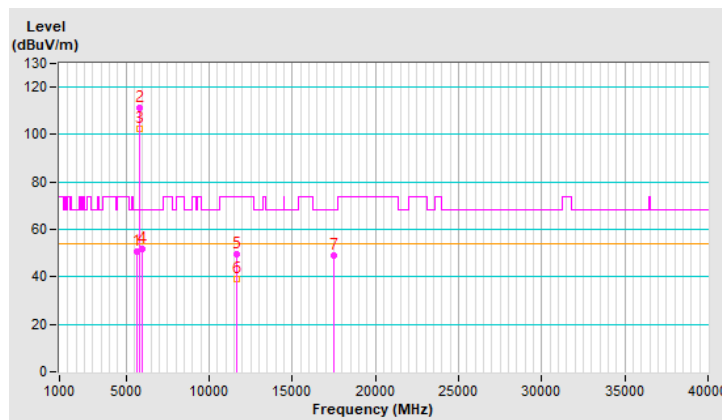


RF Mode	TX 802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.8 PK	74.0	-9.2	1.52 H	174	62.4	2.4
2	5150.00	52.2 AV	54.0	-1.8	1.52 H	174	49.8	2.4
3	*5180.00	116.8 PK			1.52 H	174	114.6	2.2
4	*5180.00	106.2 AV			1.52 H	174	104.0	2.2
5	#10360.00	55.2 PK	68.2	-13.0	1.69 H	299	43.5	11.7
6	15540.00	49.5 PK	74.0	-24.5	3.82 H	80	37.7	11.8
7	15540.00	37.5 AV	54.0	-16.5	3.82 H	80	25.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

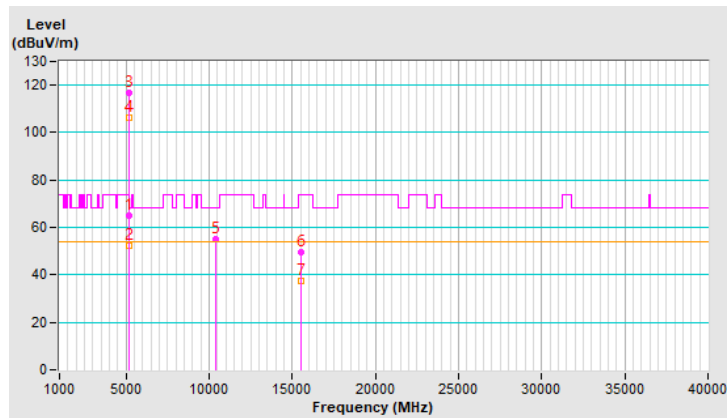


RF Mode	TX 802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.0 PK	74.0	-14.0	1.36 V	145	57.6	2.4
2	5150.00	47.1 AV	54.0	-6.9	1.36 V	145	44.7	2.4
3	*5180.00	109.6 PK			1.36 V	145	107.4	2.2
4	*5180.00	98.6 AV			1.36 V	145	96.4	2.2
5	#10360.00	48.7 PK	68.2	-19.5	3.21 V	227	37.0	11.7
6	15540.00	49.6 PK	74.0	-24.4	3.71 V	292	37.8	11.8
7	15540.00	40.6 AV	54.0	-13.4	3.71 V	292	28.8	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

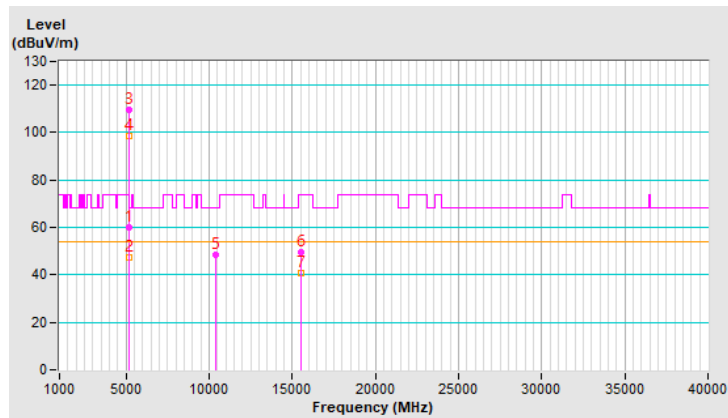


RF Mode	TX 802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	118.6 PK			1.67 H	179	116.5	2.1
2	*5200.00	107.9 AV			1.67 H	179	105.8	2.1
3	#10400.00	56.5 PK	68.2	-11.7	1.68 H	291	44.6	11.9
4	15600.00	50.6 PK	74.0	-23.4	3.79 H	87	39.1	11.5
5	15600.00	39.8 AV	54.0	-14.2	3.79 H	87	28.3	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

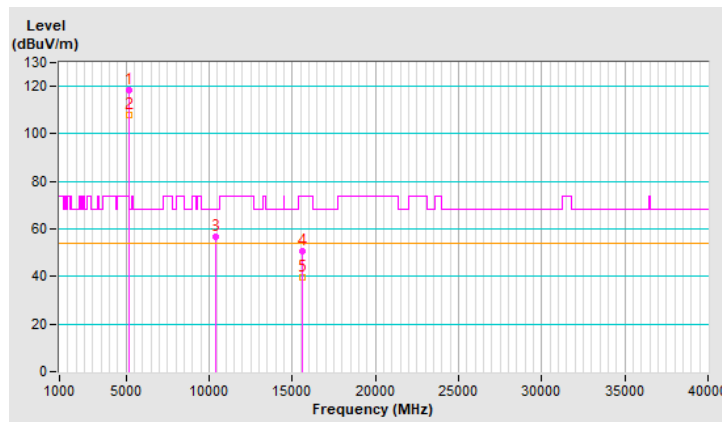


RF Mode	TX 802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	109.9 PK			1.37 V	149	107.8	2.1
2	*5200.00	99.2 AV			1.37 V	149	97.1	2.1
3	#10400.00	50.7 PK	68.2	-17.5	3.20 V	232	38.8	11.9
4	15600.00	52.0 PK	74.0	-22.0	3.69 V	301	40.5	11.5
5	15600.00	41.8 AV	54.0	-12.2	3.69 V	301	30.3	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

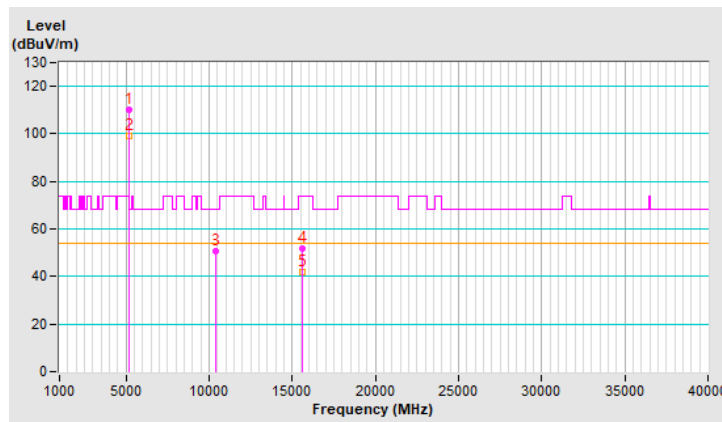


RF Mode	TX 802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	117.6 PK			1.67 H	176	115.7	1.9
2	*5240.00	107.4 AV			1.67 H	176	105.5	1.9
3	5350.00	52.1 PK	74.0	-21.9	1.67 H	176	50.1	2.0
4	5350.00	40.1 AV	54.0	-13.9	1.67 H	176	38.1	2.0
5	#10480.00	57.1 PK	68.2	-11.1	1.73 H	279	45.2	11.9
6	15720.00	49.8 PK	74.0	-24.2	3.80 H	90	38.1	11.7
7	15720.00	39.3 AV	54.0	-14.7	3.80 H	90	27.6	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

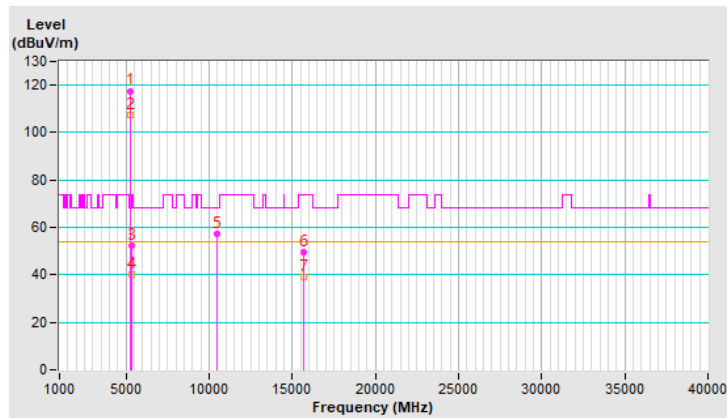


RF Mode	TX 802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5240.00	109.7 PK			1.34 V	159	107.8	1.9
2	*5240.00	98.8 AV			1.34 V	159	96.9	1.9
3	5350.00	52.5 PK	74.0	-21.5	1.34 V	159	50.5	2.0
4	5350.00	40.3 AV	54.0	-13.7	1.34 V	159	38.3	2.0
5	#10480.00	50.6 PK	68.2	-17.6	3.19 V	239	38.7	11.9
6	15720.00	52.6 PK	74.0	-21.4	3.65 V	305	40.9	11.7
7	15720.00	42.2 AV	54.0	-11.8	3.65 V	305	30.5	11.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

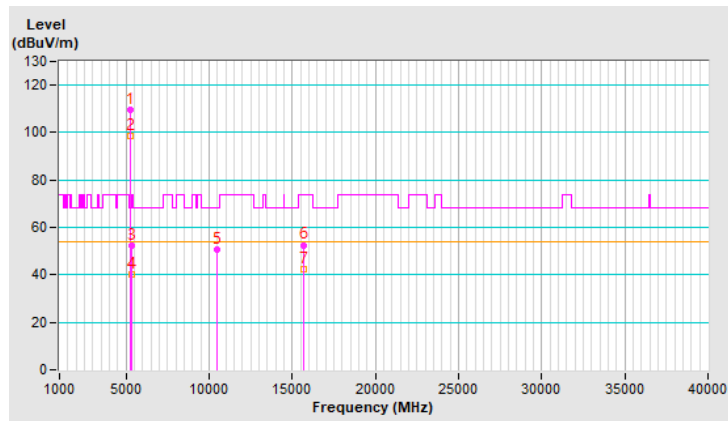


RF Mode	TX 802.11ax (HE20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.9 PK	74.0	-22.1	1.67 H	191	49.5	2.4
2	5150.00	39.8 AV	54.0	-14.2	1.67 H	191	37.4	2.4
3	*5260.00	118.5 PK			1.67 H	191	116.7	1.8
4	*5260.00	108.2 AV			1.67 H	191	106.4	1.8
5	#10520.00	55.1 PK	68.2	-13.1	1.69 H	312	43.1	12.0
6	15780.00	49.8 PK	74.0	-24.2	3.77 H	92	38.3	11.5
7	15780.00	37.7 AV	54.0	-16.3	3.77 H	92	26.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

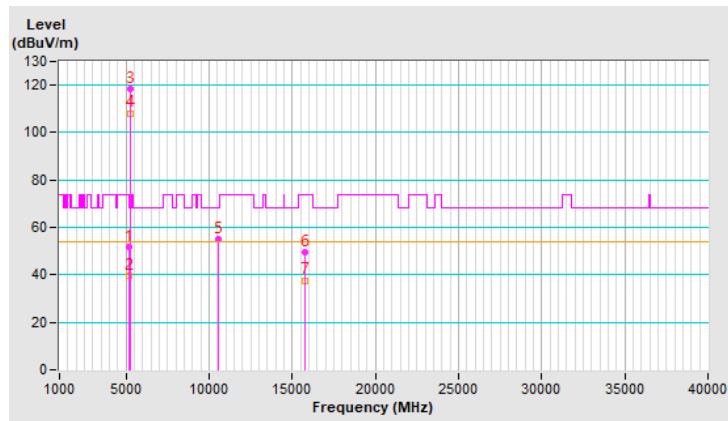


RF Mode	TX 802.11ax (HE20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.7 PK	74.0	-22.3	1.37 V	149	49.3	2.4
2	5150.00	39.7 AV	54.0	-14.3	1.37 V	149	37.3	2.4
3	*5260.00	109.9 PK			1.37 V	149	108.1	1.8
4	*5260.00	99.1 AV			1.37 V	149	97.3	1.8
5	#10520.00	48.9 PK	68.2	-19.3	3.16 V	223	36.9	12.0
6	15780.00	49.8 PK	74.0	-24.2	3.69 V	292	38.3	11.5
7	15780.00	40.5 AV	54.0	-13.5	3.69 V	292	29.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

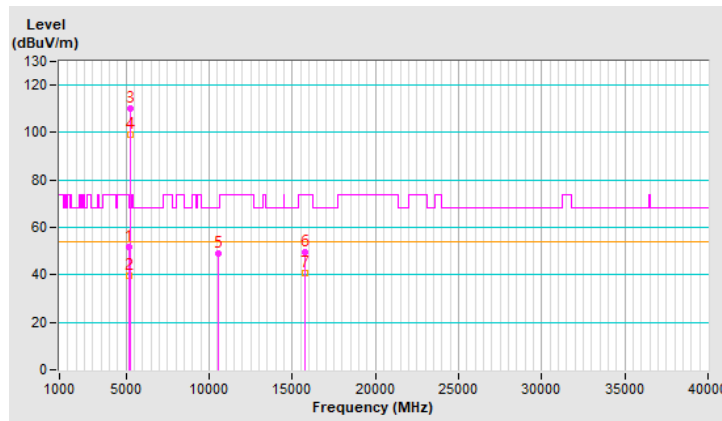


RF Mode	TX 802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	118.7 PK			1.66 H	184	117.0	1.7
2	*5300.00	108.3 AV			1.66 H	184	106.6	1.7
3	10600.00	55.3 PK	74.0	-18.7	1.64 H	313	43.6	11.7
4	10600.00	44.6 AV	54.0	-9.4	1.64 H	313	32.9	11.7
5	15900.00	50.3 PK	74.0	-23.7	3.82 H	96	39.2	11.1
6	15900.00	38.1 AV	54.0	-15.9	3.82 H	96	27.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

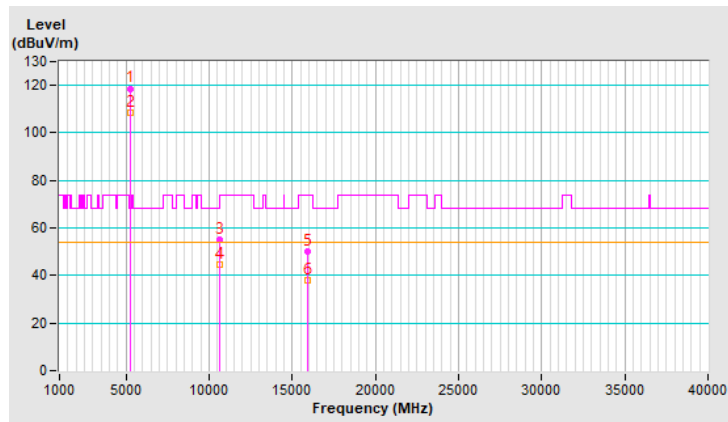


RF Mode	TX 802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	110.0 PK			1.36 V	162	108.3	1.7
2	*5300.00	99.1 AV			1.36 V	162	97.4	1.7
3	10600.00	48.8 PK	74.0	-25.2	3.25 V	214	37.1	11.7
4	10600.00	39.6 AV	54.0	-14.4	3.25 V	214	27.9	11.7
5	15900.00	49.5 PK	74.0	-24.5	3.70 V	294	38.4	11.1
6	15900.00	40.8 AV	54.0	-13.2	3.70 V	294	29.7	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

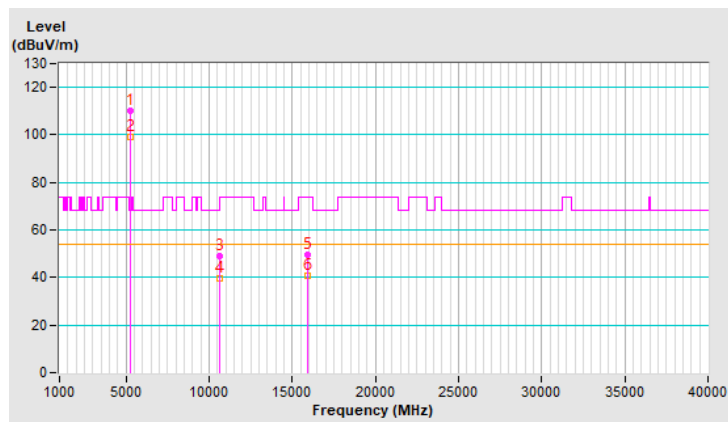


RF Mode	TX 802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	116.8 PK			1.64 H	170	115.1	1.7
2	*5320.00	106.0 AV			1.64 H	170	104.3	1.7
3	5350.00	66.4 PK	74.0	-7.6	1.64 H	170	64.4	2.0
4	5350.00	52.4 AV	54.0	-1.6	1.64 H	170	50.4	2.0
5	10640.00	52.2 PK	74.0	-21.8	1.68 H	314	40.6	11.6
6	10640.00	41.5 AV	54.0	-12.5	1.68 H	314	29.9	11.6
7	15960.00	48.9 PK	74.0	-25.1	3.82 H	87	37.5	11.4
8	15960.00	35.5 AV	54.0	-18.5	3.82 H	87	24.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

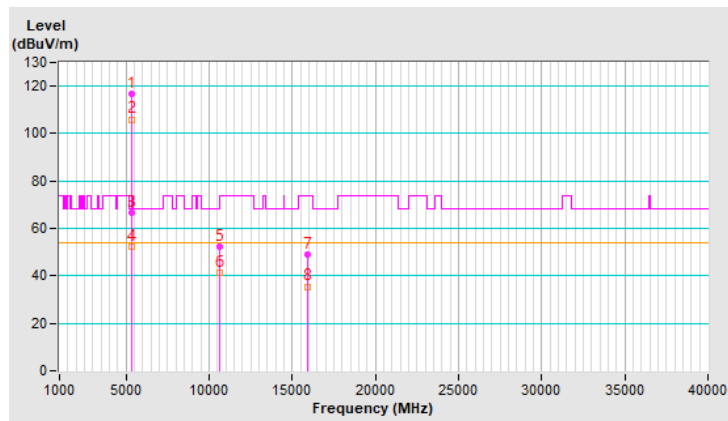


RF Mode	TX 802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	110.2 PK			4.00 V	141	108.5	1.7
2	*5320.00	100.1 AV			4.00 V	141	98.4	1.7
3	5350.00	56.2 PK	74.0	-17.8	4.00 V	141	54.2	2.0
4	5350.00	44.1 AV	54.0	-9.9	4.00 V	141	42.1	2.0
5	10640.00	47.2 PK	74.0	-26.8	3.29 V	212	35.6	11.6
6	10640.00	36.1 AV	54.0	-17.9	3.29 V	212	24.5	11.6
7	15960.00	47.6 PK	74.0	-26.4	3.75 V	289	36.2	11.4
8	15960.00	38.4 AV	54.0	-15.6	3.75 V	289	27.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

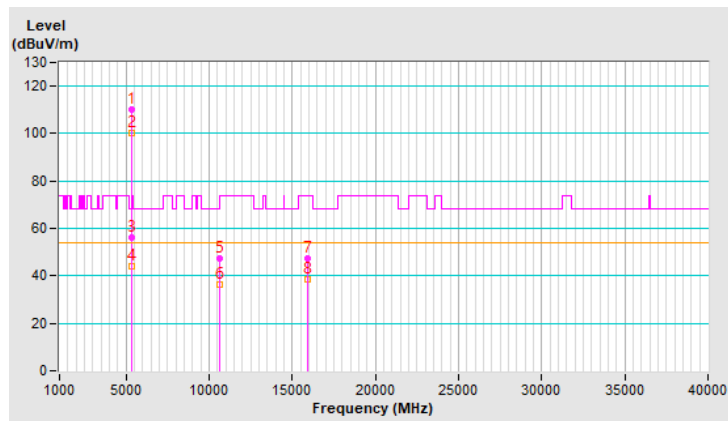


RF Mode	TX 802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5458.80	60.4 PK	74.0	-13.6	1.60 H	179	58.2	2.2
2	5458.80	44.3 AV	54.0	-9.7	1.60 H	179	42.1	2.2
3	#5467.90	66.5 PK	68.2	-1.7	1.60 H	179	64.3	2.2
4	*5500.00	114.1 PK			1.60 H	179	112.0	2.1
5	*5500.00	104.2 AV			1.60 H	179	102.1	2.1
6	11000.00	52.3 PK	74.0	-21.7	1.66 H	310	40.2	12.1
7	11000.00	41.4 AV	54.0	-12.6	1.66 H	310	29.3	12.1
8	#16500.00	49.2 PK	68.2	-19.0	3.80 H	75	35.8	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

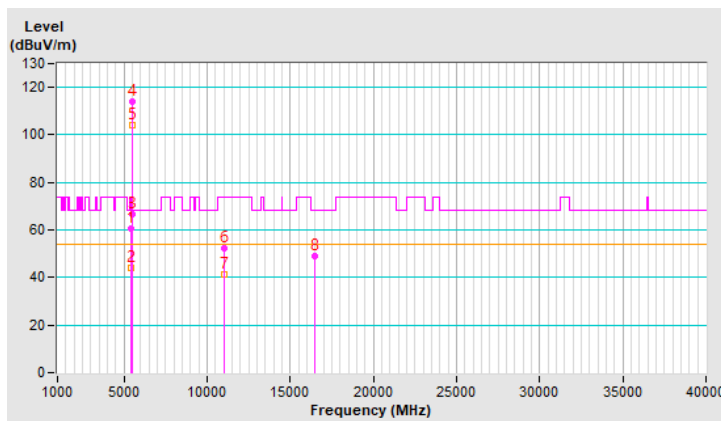


RF Mode	TX 802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.5 PK	74.0	-21.5	1.42 V	130	50.3	2.2
2	5460.00	41.0 AV	54.0	-13.0	1.42 V	130	38.8	2.2
3	#5470.00	57.9 PK	68.2	-10.3	1.42 V	130	55.7	2.2
4	*5500.00	109.6 PK			1.42 V	130	107.5	2.1
5	*5500.00	99.8 AV			1.42 V	130	97.7	2.1
6	11000.00	47.4 PK	74.0	-26.6	3.29 V	212	35.3	12.1
7	11000.00	36.2 AV	54.0	-17.8	3.29 V	212	24.1	12.1
8	#16500.00	46.9 PK	68.2	-21.3	3.74 V	277	33.5	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

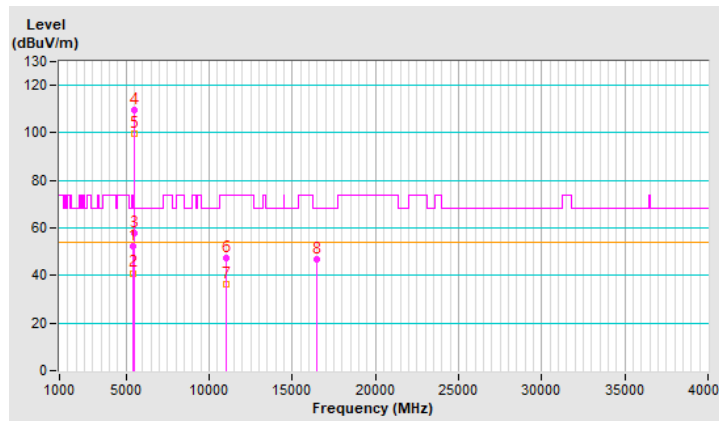


RF Mode	TX 802.11ax (HE20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	117.5 PK			1.59 H	183	115.3	2.2
2	*5580.00	107.3 AV			1.59 H	183	105.1	2.2
3	11160.00	55.6 PK	74.0	-18.4	1.70 H	316	43.7	11.9
4	11160.00	44.6 AV	54.0	-9.4	1.70 H	316	32.7	11.9
5	#16740.00	50.4 PK	68.2	-17.8	3.78 H	88	35.2	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

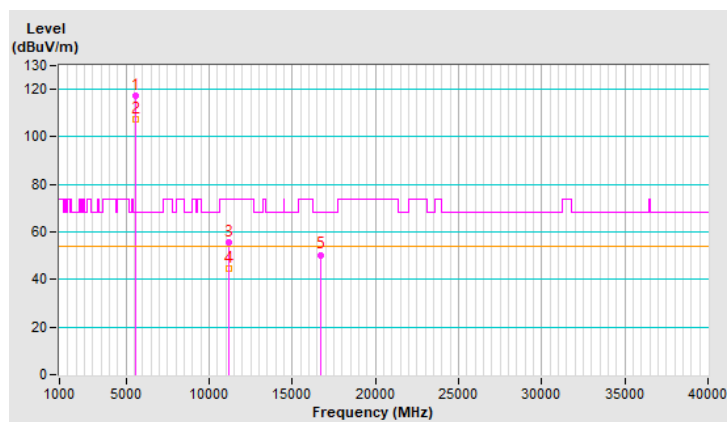


RF Mode	TX 802.11ax (HE20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	111.8 PK			1.37 V	144	109.6	2.2
2	*5580.00	100.4 AV			1.37 V	144	98.2	2.2
3	11160.00	48.1 PK	74.0	-25.9	3.24 V	225	36.2	11.9
4	11160.00	39.1 AV	54.0	-14.9	3.24 V	225	27.2	11.9
5	#16740.00	50.2 PK	68.2	-18.0	3.73 V	281	35.0	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

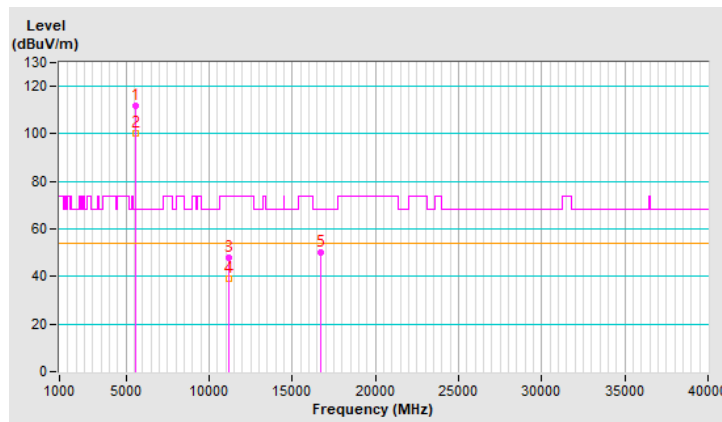


RF Mode	TX 802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	114.9 PK			1.41 H	177	112.6	2.3
2	*5700.00	104.7 AV			1.41 H	177	102.4	2.3
3	#5725.00	66.6 PK	68.2	-1.6	1.41 H	177	64.1	2.5
4	11400.00	52.2 PK	74.0	-21.8	1.71 H	298	40.0	12.2
5	11400.00	41.2 AV	54.0	-12.8	1.71 H	298	29.0	12.2
6	#17100.00	49.2 PK	68.2	-19.0	3.83 H	89	32.6	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

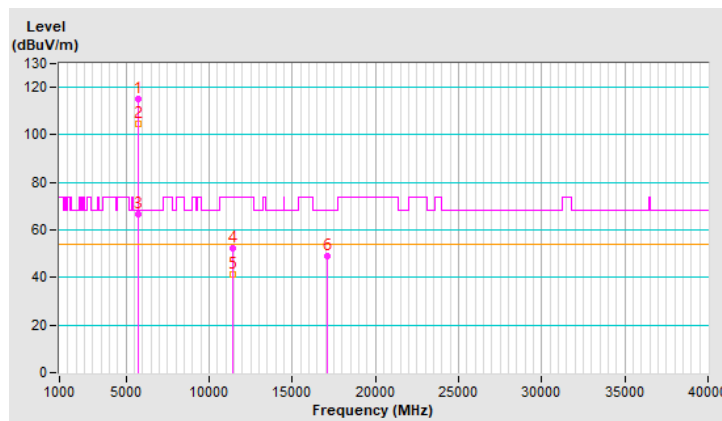


RF Mode	TX 802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	108.2 PK			1.43 V	129	105.9	2.3
2	*5700.00	96.9 AV			1.43 V	129	94.6	2.3
3	#5725.00	57.7 PK	68.2	-10.5	1.43 V	129	55.2	2.5
4	11400.00	46.9 PK	74.0	-27.1	3.33 V	203	34.7	12.2
5	11400.00	35.8 AV	54.0	-18.2	3.33 V	203	23.6	12.2
6	#17100.00	47.1 PK	68.2	-21.1	3.78 V	275	30.5	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

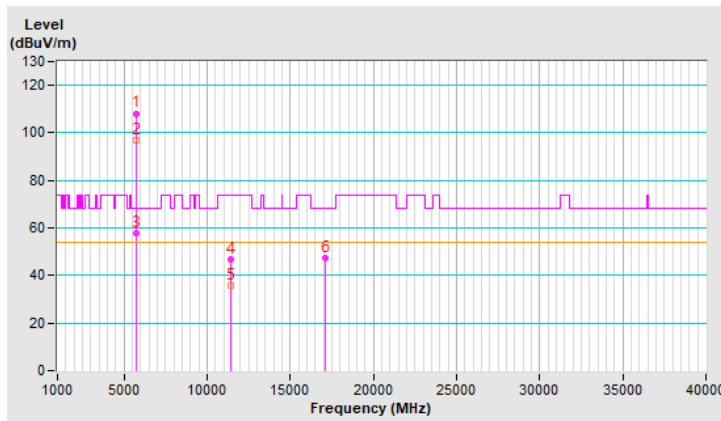


RF Mode	TX 802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	5460.00	51.1 PK	74.0	-22.9	1.55 H	172	48.9	2.2
2	5460.00	39.0 AV	54.0	-15.0	1.55 H	172	36.8	2.2
3	#5470.00	51.6 PK	68.2	-16.6	1.55 H	172	49.4	2.2
4	*5720.00	118.0 PK			1.55 H	172	115.6	2.4
5	*5720.00	107.7 AV			1.55 H	172	105.3	2.4
6	#5850.00	51.8 PK	68.2	-16.4	1.55 H	172	48.9	2.9
7	11440.00	55.0 PK	74.0	-19.0	1.72 H	316	42.8	12.2
8	11440.00	44.2 AV	54.0	-9.8	1.72 H	316	32.0	12.2
9	#17160.00	50.2 PK	68.2	-18.0	3.75 H	103	33.7	16.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

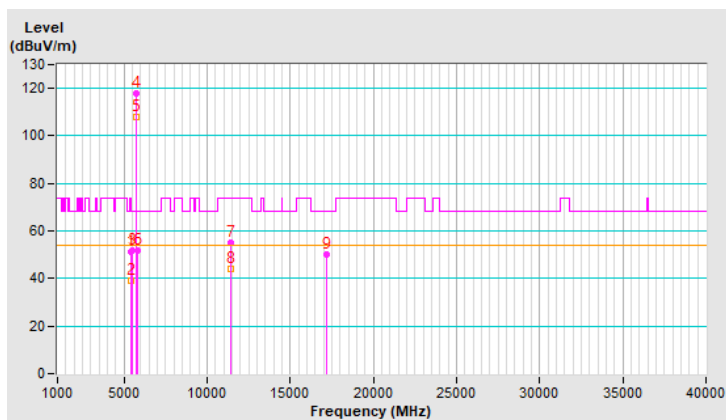




RF Mode	TX 802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.2 PK	74.0	-22.8	1.38 V	143	49.0	2.2
2	5460.00	39.0 AV	54.0	-15.0	1.38 V	143	36.8	2.2
3	#5470.00	52.1 PK	68.2	-16.1	1.38 V	143	49.9	2.2
4	*5720.00	111.9 PK			1.38 V	143	109.5	2.4
5	*5720.00	100.6 AV			1.38 V	143	98.2	2.4
6	#5850.00	52.2 PK	68.2	-16.0	1.38 V	143	49.3	2.9
7	11440.00	47.8 PK	74.0	-26.2	3.22 V	237	35.6	12.2
8	11440.00	39.1 AV	54.0	-14.9	3.22 V	237	26.9	12.2
9	#17160.00	50.6 PK	68.2	-17.6	3.78 V	290	34.1	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

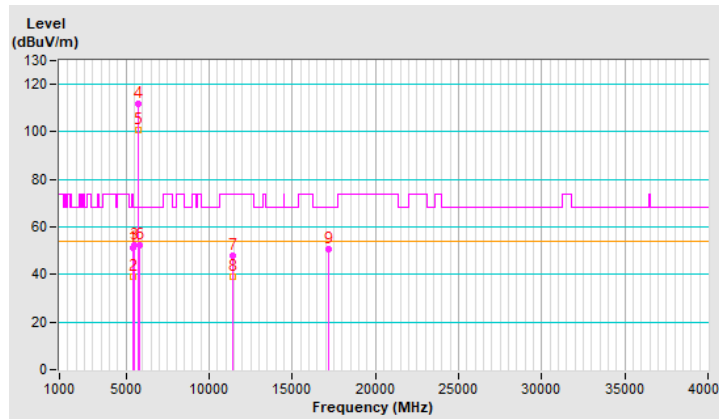




RF Mode	TX 802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5588.51	51.7 PK	68.2	-16.5	1.20 H	177	49.5	2.2
2	*5745.00	118.2 PK			1.20 H	177	115.7	2.5
3	*5745.00	108.2 AV			1.20 H	177	105.7	2.5
4	#5969.91	52.8 PK	68.2	-15.4	1.20 H	177	49.9	2.9
5	11490.00	53.8 PK	74.0	-20.2	1.99 H	333	41.4	12.4
6	11490.00	43.1 AV	54.0	-10.9	1.99 H	333	30.7	12.4
7	#17235.00	58.7 PK	68.2	-9.5	1.53 H	85	42.0	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

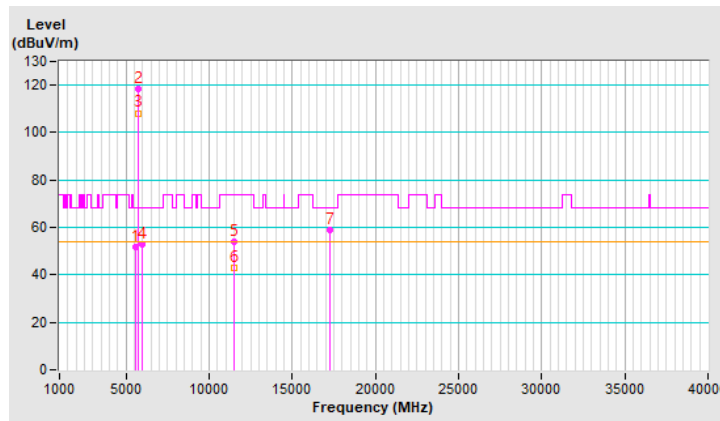




RF Mode	TX 802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5621.08	51.0 PK	68.2	-17.2	3.76 V	170	48.8	2.2
2	*5745.00	112.2 PK			3.76 V	170	109.7	2.5
3	*5745.00	101.0 AV			3.76 V	170	98.5	2.5
4	#5948.75	51.1 PK	68.2	-17.1	3.76 V	170	48.2	2.9
5	11490.00	49.2 PK	74.0	-24.8	2.05 V	309	36.8	12.4
6	11490.00	38.7 AV	54.0	-15.3	2.05 V	309	26.3	12.4
7	#17235.00	49.1 PK	68.2	-19.1	1.44 V	301	32.4	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

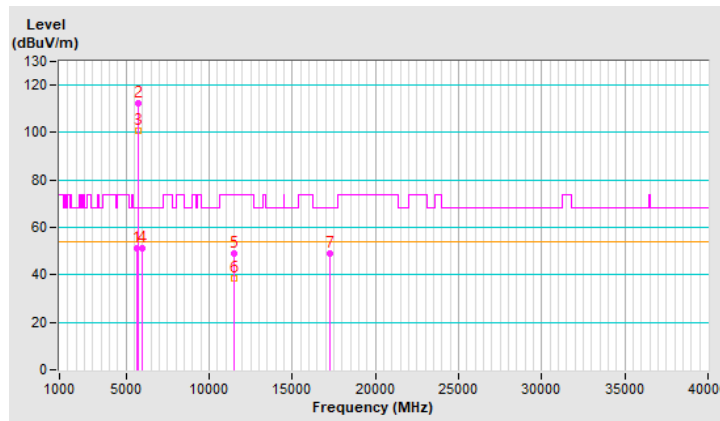




RF Mode	TX 802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5633.28	51.9 PK	68.2	-16.3	1.50 H	165	49.6	2.3
2	*5785.00	117.6 PK			1.50 H	165	114.9	2.7
3	*5785.00	107.2 AV			1.50 H	165	104.5	2.7
4	#6012.86	51.7 PK	68.2	-16.5	1.50 H	165	48.8	2.9
5	11570.00	53.7 PK	74.0	-20.3	1.94 H	343	41.3	12.4
6	11570.00	42.8 AV	54.0	-11.2	1.94 H	343	30.4	12.4
7	#17355.00	59.1 PK	68.2	-9.1	1.55 H	98	41.5	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

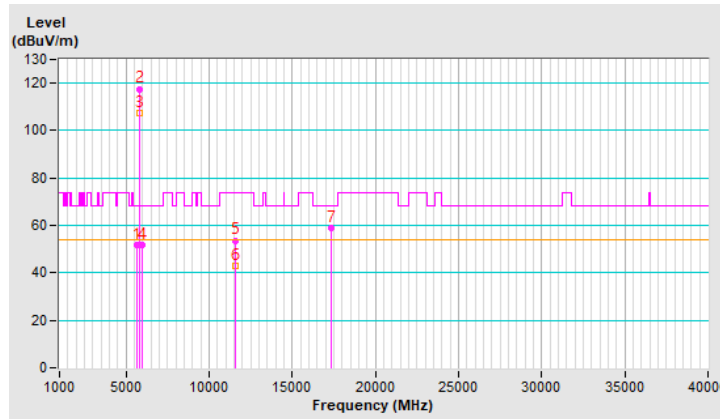


RF Mode	TX 802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5586.05	50.0 PK	68.2	-18.2	3.70 V	156	47.8	2.2
2	*5785.00	112.9 PK			3.70 V	156	110.2	2.7
3	*5785.00	101.5 AV			3.70 V	156	98.8	2.7
4	#5985.50	50.4 PK	68.2	-17.8	3.70 V	156	47.5	2.9
5	11570.00	49.3 PK	74.0	-24.7	2.06 V	302	36.9	12.4
6	11570.00	38.8 AV	54.0	-15.2	2.06 V	302	26.4	12.4
7	#17355.00	49.0 PK	68.2	-19.2	1.41 V	314	31.4	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

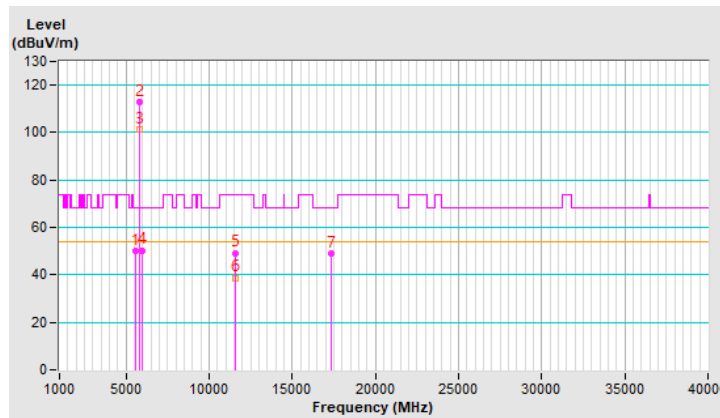


RF Mode	TX 802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5589.14	51.4 PK	68.2	-16.8	1.25 H	182	49.2	2.2
2	*5825.00	117.9 PK			1.25 H	182	115.1	2.8
3	*5825.00	108.1 AV			1.25 H	182	105.3	2.8
4	#5956.52	51.8 PK	68.2	-16.4	1.25 H	182	48.9	2.9
5	11650.00	53.4 PK	74.0	-20.6	1.94 H	348	41.5	11.9
6	11650.00	42.7 AV	54.0	-11.3	1.94 H	348	30.8	11.9
7	#17475.00	58.8 PK	68.2	-9.4	1.49 H	93	40.3	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

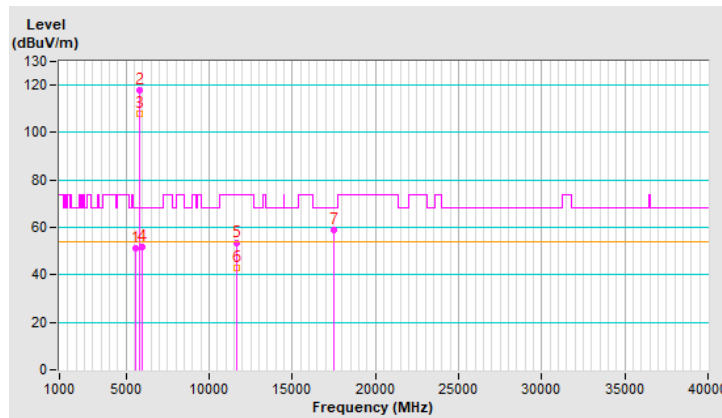




RF Mode	TX 802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5600.42	50.8 PK	68.2	-17.4	3.87 V	135	48.6	2.2
2	*5825.00	113.1 PK			3.87 V	135	110.3	2.8
3	*5825.00	102.0 AV			3.87 V	135	99.2	2.8
4	#5925.11	50.9 PK	68.2	-17.3	3.87 V	135	48.0	2.9
5	11650.00	50.4 PK	74.0	-23.6	1.95 V	294	38.5	11.9
6	11650.00	39.5 AV	54.0	-14.5	1.95 V	294	27.6	11.9
7	#17475.00	48.8 PK	68.2	-19.4	1.50 V	307	30.3	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

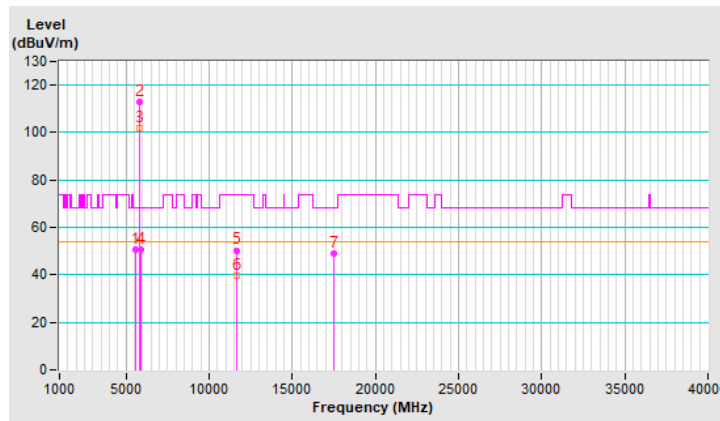




RF Mode	TX 802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.2 PK	74.0	-1.8	1.66 H	174	69.8	2.4
2	5150.00	52.4 AV	54.0	-1.6	1.66 H	174	50.0	2.4
3	*5190.00	111.6 PK			1.66 H	174	109.4	2.2
4	*5190.00	99.3 AV			1.66 H	174	97.1	2.2
5	#10380.00	52.4 PK	68.2	-15.8	1.67 H	325	40.6	11.8
6	15570.00	48.9 PK	74.0	-25.1	3.82 H	88	37.1	11.8
7	15570.00	35.5 AV	54.0	-18.5	3.82 H	88	23.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

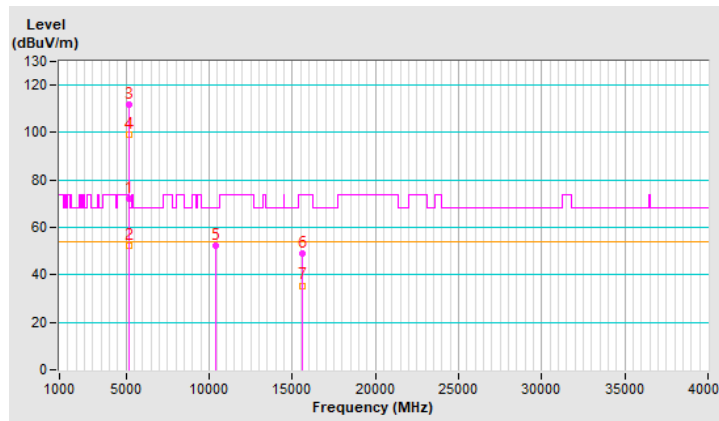


RF Mode	TX 802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.4 PK	74.0	-9.6	1.31 V	149	62.0	2.4
2	5150.00	46.3 AV	54.0	-7.7	1.31 V	149	43.9	2.4
3	*5190.00	103.7 PK			1.31 V	149	101.5	2.2
4	*5190.00	92.7 AV			1.31 V	149	90.5	2.2
5	#10380.00	47.6 PK	68.2	-20.6	3.26 V	204	35.8	11.8
6	15570.00	47.2 PK	74.0	-26.8	3.77 V	292	35.4	11.8
7	15570.00	38.0 AV	54.0	-16.0	3.77 V	292	26.2	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

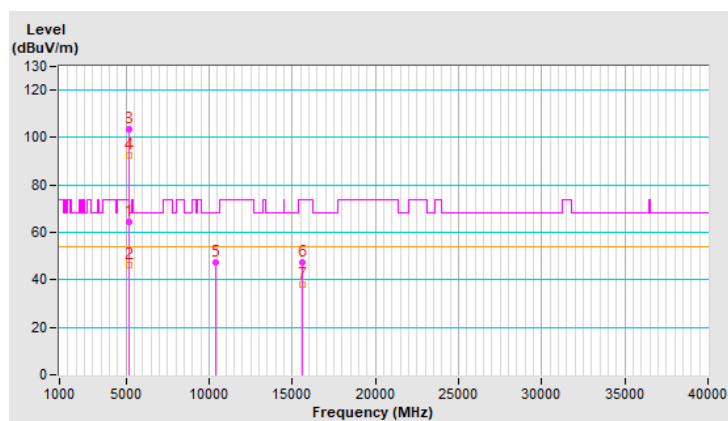




RF Mode	TX 802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.8 PK	74.0	-5.2	1.74 H	175	66.4	2.4
2	5150.00	47.8 AV	54.0	-6.2	1.74 H	175	45.4	2.4
3	*5230.00	115.5 PK			1.74 H	175	113.5	2.0
4	*5230.00	104.1 AV			1.74 H	175	102.1	2.0
5	5350.00	58.1 PK	74.0	-15.9	1.74 H	175	56.1	2.0
6	5350.00	40.0 AV	54.0	-14.0	1.74 H	175	38.0	2.0
7	#10460.00	53.3 PK	68.2	-14.9	1.74 H	314	41.3	12.0
8	15690.00	48.6 PK	74.0	-25.4	3.75 H	103	36.7	11.9
9	15690.00	35.2 AV	54.0	-18.8	3.75 H	103	23.3	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

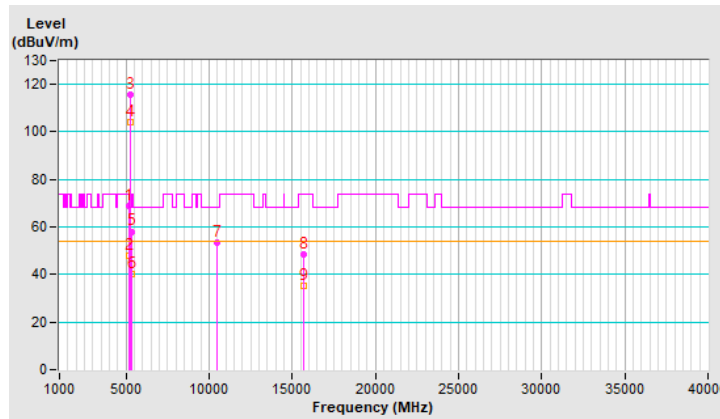


RF Mode	TX 802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.5 PK	74.0	-14.5	1.30 V	143	57.1	2.4
2	5150.00	41.2 AV	54.0	-12.8	1.30 V	143	38.8	2.4
3	*5230.00	108.2 PK			1.30 V	143	106.2	2.0
4	*5230.00	97.4 AV			1.30 V	143	95.4	2.0
5	5350.00	51.8 PK	74.0	-22.2	1.30 V	143	49.8	2.0
6	5350.00	39.5 AV	54.0	-14.5	1.30 V	143	37.5	2.0
7	#10460.00	46.9 PK	68.2	-21.3	3.33 V	203	34.9	12.0
8	15690.00	46.9 PK	74.0	-27.1	3.81 V	272	35.0	11.9
9	15690.00	37.6 AV	54.0	-16.4	3.81 V	272	25.7	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

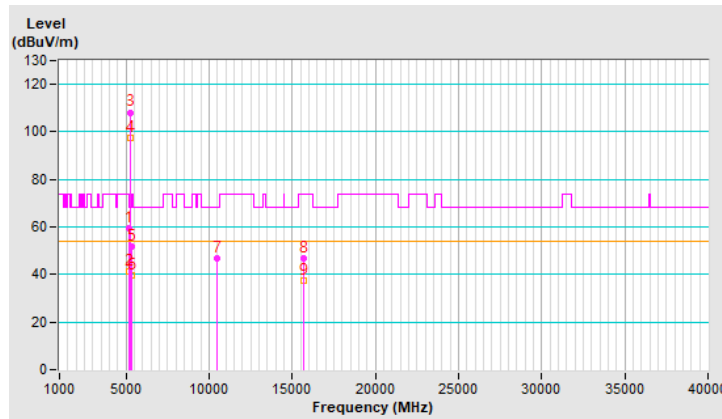


RF Mode	TX 802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.6 PK	74.0	-18.4	1.81 H	175	53.2	2.4
2	5150.00	40.5 AV	54.0	-13.5	1.81 H	175	38.1	2.4
3	*5270.00	116.4 PK			1.81 H	175	114.6	1.8
4	*5270.00	104.3 AV			1.81 H	175	102.5	1.8
5	5350.00	65.5 PK	74.0	-8.5	1.81 H	175	63.5	2.0
6	5350.00	48.0 AV	54.0	-6.0	1.81 H	175	46.0	2.0
7	#10540.00	52.6 PK	68.2	-15.6	1.70 H	321	40.7	11.9
8	15810.00	48.7 PK	74.0	-25.3	3.77 H	98	37.3	11.4
9	15810.00	35.3 AV	54.0	-18.7	3.77 H	98	23.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

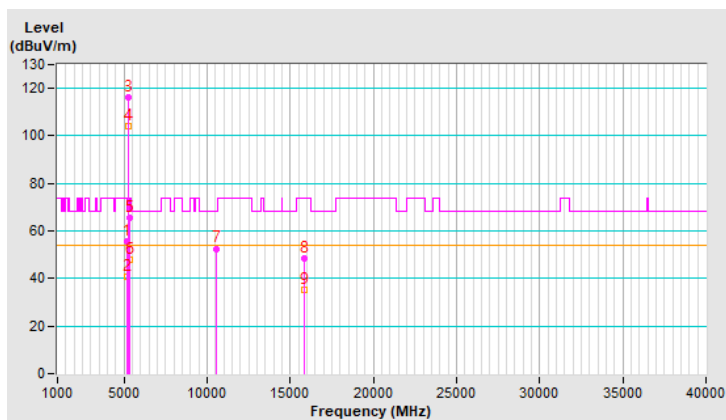


RF Mode	TX 802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.1 PK	74.0	-21.9	1.26 V	140	49.7	2.4
2	5150.00	39.9 AV	54.0	-14.1	1.26 V	140	37.5	2.4
3	*5270.00	108.5 PK			1.26 V	140	106.7	1.8
4	*5270.00	97.7 AV			1.26 V	140	95.9	1.8
5	5350.00	59.4 PK	74.0	-14.6	1.26 V	140	57.4	2.0
6	5350.00	41.0 AV	54.0	-13.0	1.26 V	140	39.0	2.0
7	#10540.00	47.1 PK	68.2	-21.1	3.29 V	207	35.2	11.9
8	15810.00	47.2 PK	74.0	-26.8	3.75 V	287	35.8	11.4
9	15810.00	38.0 AV	54.0	-16.0	3.75 V	287	26.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

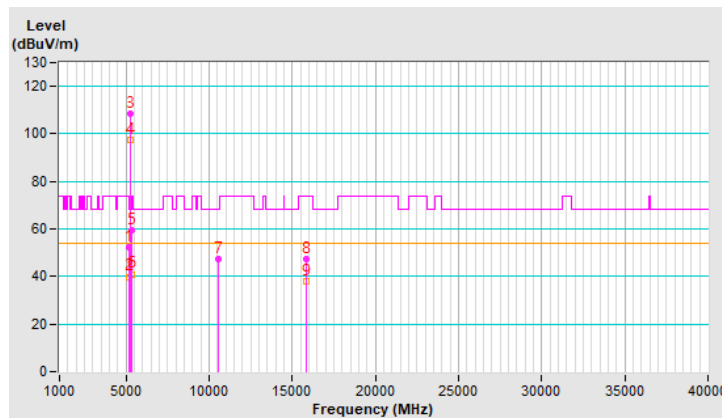




RF Mode	TX 802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	111.9 PK			1.70 H	175	110.2	1.7
2	*5310.00	99.7 AV			1.70 H	175	98.0	1.7
3	5350.00	72.3 PK	74.0	-1.7	1.70 H	175	70.3	2.0
4	5350.00	51.3 AV	54.0	-2.7	1.70 H	175	49.3	2.0
5	10620.00	48.7 PK	74.0	-25.3	1.65 H	308	37.1	11.6
6	10620.00	37.4 AV	54.0	-16.6	1.65 H	308	25.8	11.6
7	15930.00	47.3 PK	74.0	-26.7	3.82 H	106	36.0	11.3
8	15930.00	35.0 AV	54.0	-19.0	3.82 H	106	23.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

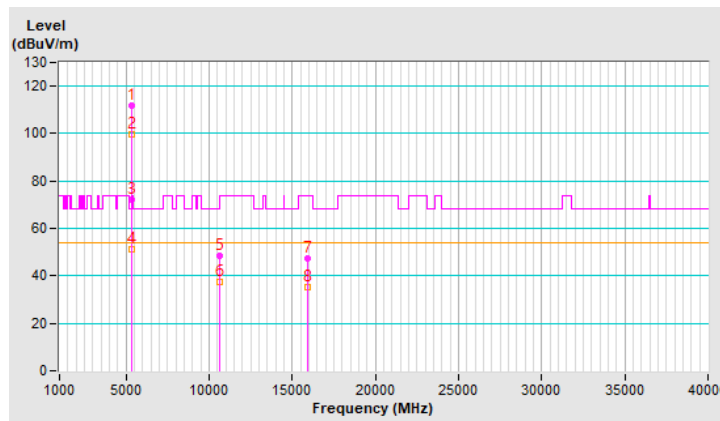


RF Mode	TX 802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	106.6 PK			3.91 V	137	104.9	1.7
2	*5310.00	94.5 AV			3.91 V	137	92.8	1.7
3	5350.00	61.1 PK	74.0	-12.9	3.91 V	137	59.1	2.0
4	5350.00	43.3 AV	54.0	-10.7	3.91 V	137	41.3	2.0
5	10620.00	46.9 PK	74.0	-27.1	3.26 V	205	35.3	11.6
6	10620.00	35.6 AV	54.0	-18.4	3.26 V	205	24.0	11.6
7	15930.00	46.5 PK	74.0	-27.5	3.74 V	278	35.2	11.3
8	15930.00	37.4 AV	54.0	-16.6	3.74 V	278	26.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

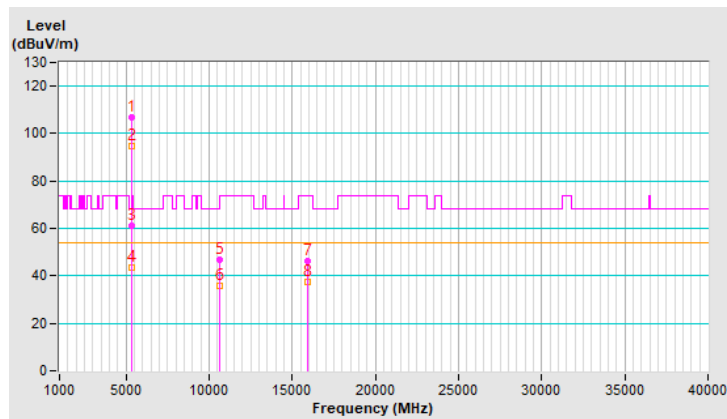




RF Mode	TX 802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.0 PK	74.0	-14.0	1.49 H	178	57.8	2.2
2	5460.00	45.6 AV	54.0	-8.4	1.49 H	178	43.4	2.2
3	#5470.00	66.6 PK	68.2	-1.6	1.49 H	178	64.4	2.2
4	*5510.00	109.5 PK			1.49 H	178	107.4	2.1
5	*5510.00	97.2 AV			1.49 H	178	95.1	2.1
6	11020.00	49.2 PK	74.0	-24.8	1.66 H	301	37.1	12.1
7	11020.00	37.8 AV	54.0	-16.2	1.66 H	301	25.7	12.1
8	#16530.00	47.1 PK	68.2	-21.1	3.86 H	110	33.4	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

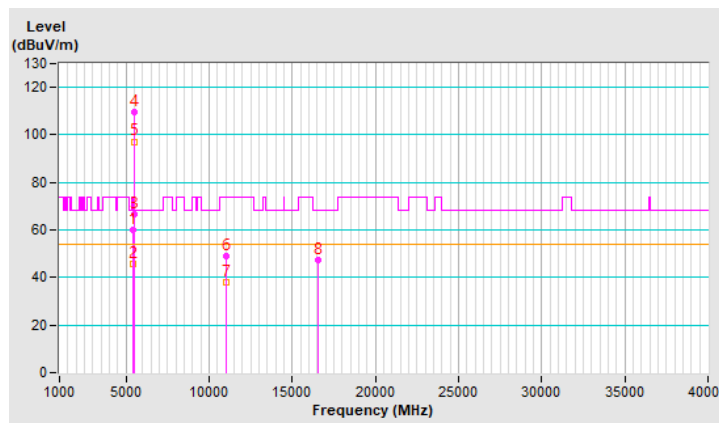




RF Mode	TX 802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.6 PK	74.0	-19.4	3.10 V	129	52.4	2.2
2	5460.00	41.4 AV	54.0	-12.6	3.10 V	129	39.2	2.2
3	#5470.00	61.2 PK	68.2	-7.0	3.10 V	129	59.0	2.2
4	*5510.00	103.5 PK			3.10 V	129	101.4	2.1
5	*5510.00	92.6 AV			3.10 V	129	90.5	2.1
6	11020.00	46.6 PK	74.0	-27.4	3.26 V	212	34.5	12.1
7	11020.00	35.4 AV	54.0	-18.6	3.26 V	212	23.3	12.1
8	#16530.00	46.8 PK	68.2	-21.4	3.77 V	288	33.1	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

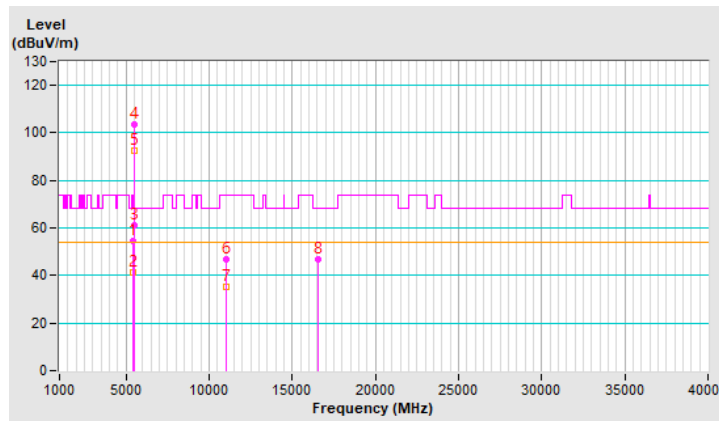


RF Mode	TX 802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.8 PK	74.0	-11.2	1.50 H	168	60.6	2.2
2	5460.00	45.7 AV	54.0	-8.3	1.50 H	168	43.5	2.2
3	#5467.20	66.4 PK	68.2	-1.8	1.50 H	168	64.2	2.2
4	*5550.00	115.4 PK			1.50 H	168	113.2	2.2
5	*5550.00	103.0 AV			1.50 H	168	100.8	2.2
6	11100.00	49.6 PK	74.0	-24.4	1.72 H	308	37.7	11.9
7	11100.00	38.0 AV	54.0	-16.0	1.72 H	308	26.1	11.9
8	#16650.00	47.2 PK	68.2	-21.0	3.81 H	109	32.5	14.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

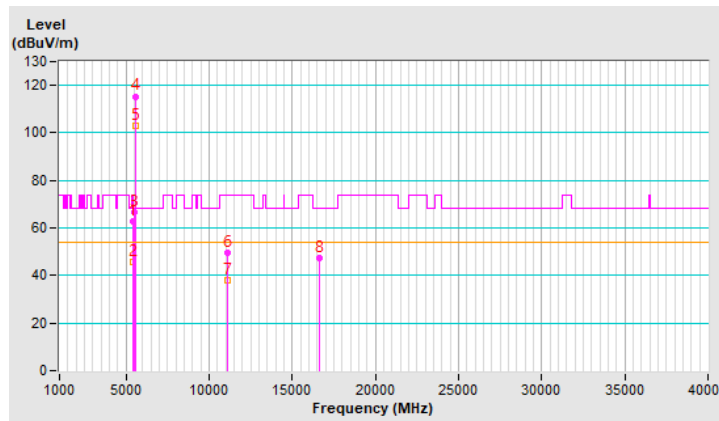




RF Mode	TX 802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.1 PK	74.0	-17.9	3.07 V	130	53.9	2.2
2	5460.00	41.8 AV	54.0	-12.2	3.07 V	130	39.6	2.2
3	#5470.00	60.8 PK	68.2	-7.4	3.07 V	130	58.6	2.2
4	*5550.00	108.1 PK			3.07 V	130	105.9	2.2
5	*5550.00	97.3 AV			3.07 V	130	95.1	2.2
6	11100.00	46.1 PK	74.0	-27.9	3.25 V	223	34.2	11.9
7	11100.00	35.1 AV	54.0	-18.9	3.25 V	223	23.2	11.9
8	#16650.00	47.0 PK	68.2	-21.2	3.76 V	302	32.3	14.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

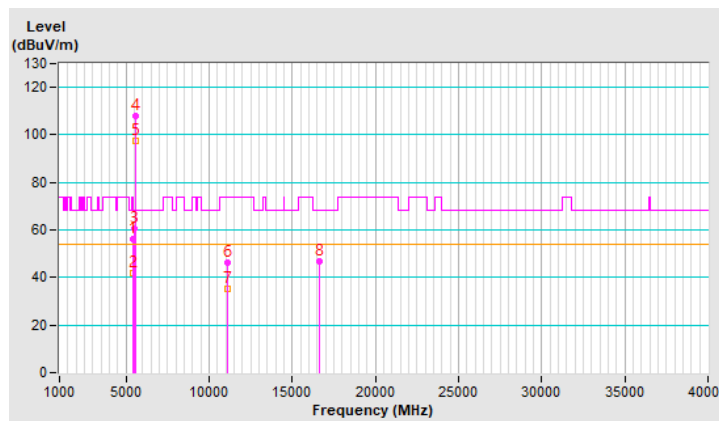


RF Mode	TX 802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	113.1 PK			1.38 H	174	110.9	2.2
2	*5670.00	101.8 AV			1.38 H	174	99.6	2.2
3	#5725.00	66.4 PK	68.2	-1.8	1.38 H	174	63.9	2.5
4	11340.00	49.4 PK	74.0	-24.6	1.71 H	298	37.3	12.1
5	11340.00	37.9 AV	54.0	-16.1	1.71 H	298	25.8	12.1
6	#17010.00	47.2 PK	68.2	-21.0	3.92 H	99	30.7	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

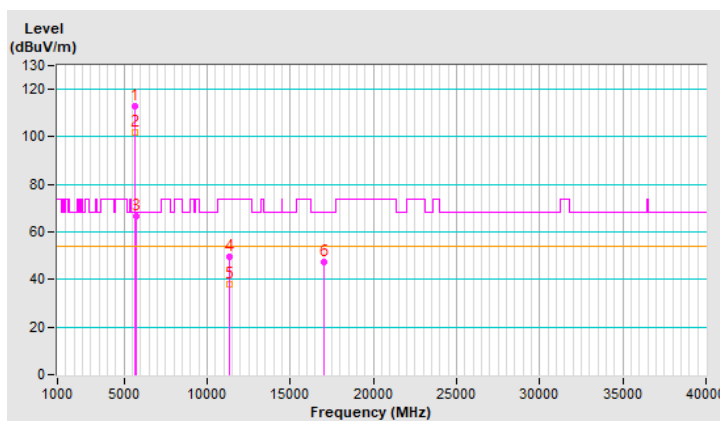


RF Mode	TX 802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	107.3 PK			3.06 V	135	105.1	2.2
2	*5670.00	96.2 AV			3.06 V	135	94.0	2.2
3	#5725.00	62.2 PK	68.2	-6.0	3.06 V	135	59.7	2.5
4	11340.00	47.2 PK	74.0	-26.8	3.27 V	224	35.1	12.1
5	11340.00	35.8 AV	54.0	-18.2	3.27 V	224	23.7	12.1
6	#17010.00	46.9 PK	68.2	-21.3	3.73 V	280	30.4	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

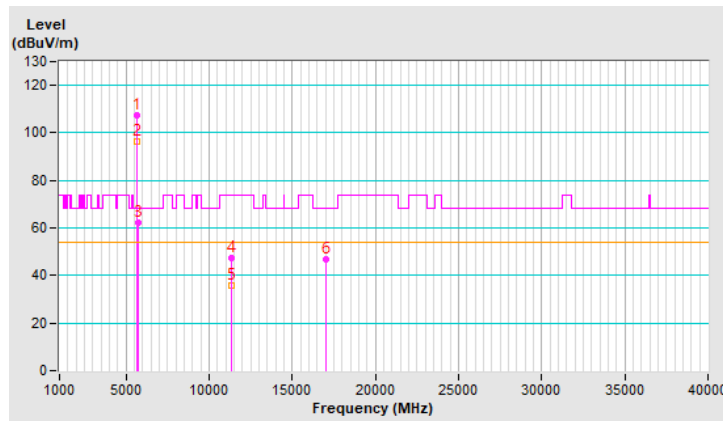


RF Mode	TX 802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.4 PK	74.0	-23.6	1.59 H	176	48.2	2.2
2	5460.00	38.3 AV	54.0	-15.7	1.59 H	176	36.1	2.2
3	#5470.00	50.6 PK	68.2	-17.6	1.59 H	176	48.4	2.2
4	*5710.00	116.8 PK			1.59 H	176	114.4	2.4
5	*5710.00	104.0 AV			1.59 H	176	101.6	2.4
6	#5850.00	55.3 PK	68.2	-12.9	1.59 H	176	52.4	2.9
7	11420.00	49.0 PK	74.0	-25.0	1.60 H	295	36.7	12.3
8	11420.00	37.7 AV	54.0	-16.3	1.60 H	295	25.4	12.3
9	#17130.00	47.6 PK	68.2	-20.6	3.82 H	107	31.0	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

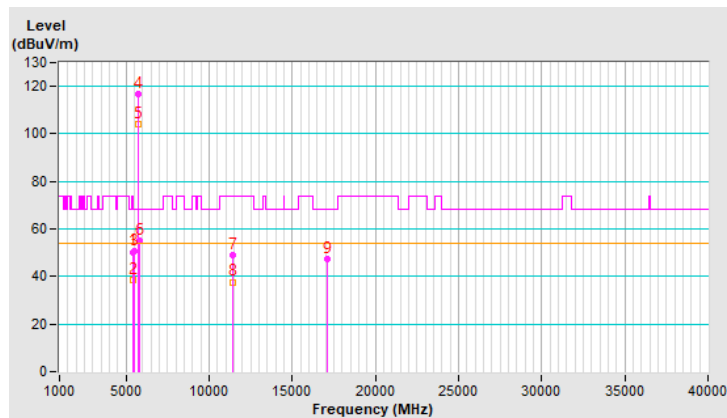


RF Mode	TX 802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.0 PK	74.0	-24.0	3.03 V	151	47.8	2.2
2	5460.00	37.8 AV	54.0	-16.2	3.03 V	151	35.6	2.2
3	#5470.00	50.5 PK	68.2	-17.7	3.03 V	151	48.3	2.2
4	*5710.00	106.7 PK			3.03 V	151	104.3	2.4
5	*5710.00	95.8 AV			3.03 V	151	93.4	2.4
6	#5850.00	55.1 PK	68.2	-13.1	3.03 V	151	52.2	2.9
7	11420.00	46.8 PK	74.0	-27.2	3.23 V	202	34.5	12.3
8	11420.00	35.4 AV	54.0	-18.6	3.23 V	202	23.1	12.3
9	#17130.00	46.6 PK	68.2	-21.6	3.78 V	291	30.0	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

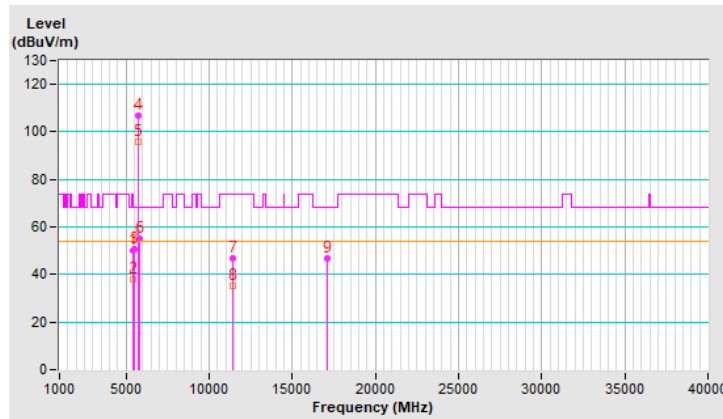




RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.33	63.1 PK	68.2	-5.1	1.39 H	178	60.8	2.3
2	*5755.00	116.3 PK			1.39 H	178	113.7	2.6
3	*5755.00	104.6 AV			1.39 H	178	102.0	2.6
4	#5926.32	54.4 PK	68.2	-13.8	1.39 H	178	51.5	2.9
5	11510.00	49.2 PK	74.0	-24.8	1.91 H	334	36.8	12.4
6	11510.00	38.5 AV	54.0	-15.5	1.91 H	334	26.1	12.4
7	#17265.00	54.6 PK	68.2	-13.6	1.54 H	82	37.8	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

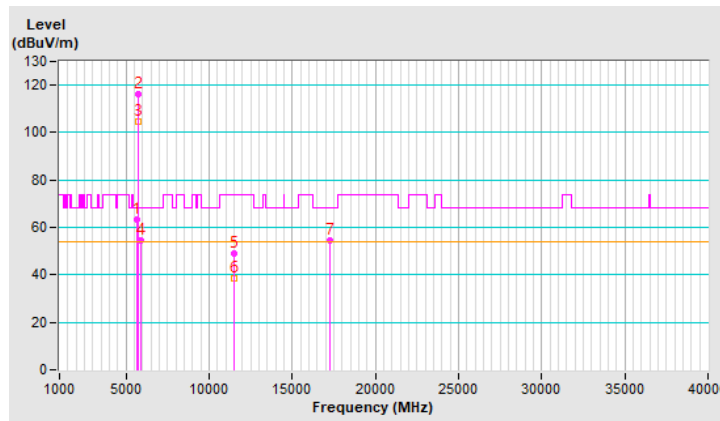


RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.42	57.0 PK	68.2	-11.2	3.61 V	150	54.7	2.3
2	*5755.00	110.6 PK			3.61 V	150	108.0	2.6
3	*5755.00	99.0 AV			3.61 V	150	96.4	2.6
4	#5964.54	50.8 PK	68.2	-17.4	3.61 V	150	47.9	2.9
5	11510.00	46.7 PK	74.0	-27.3	2.03 V	302	34.3	12.4
6	11510.00	35.9 AV	54.0	-18.1	2.03 V	302	23.5	12.4
7	#17265.00	48.6 PK	68.2	-19.6	1.44 V	325	31.8	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

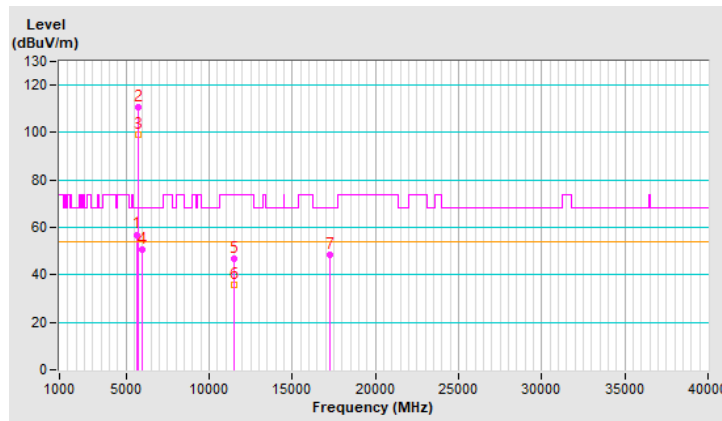


RF Mode	TX 802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.62	57.6 PK	68.2	-10.6	1.81 H	279	55.3	2.3
2	*5795.00	115.8 PK			1.81 H	279	113.1	2.7
3	*5795.00	104.0 AV			1.81 H	279	101.3	2.7
4	#5931.97	61.3 PK	68.2	-6.9	1.81 H	279	58.4	2.9
5	11590.00	49.3 PK	74.0	-24.7	1.91 H	332	37.0	12.3
6	11590.00	38.4 AV	54.0	-15.6	1.91 H	332	26.1	12.3
7	#17385.00	54.8 PK	68.2	-13.4	1.50 H	72	37.0	17.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

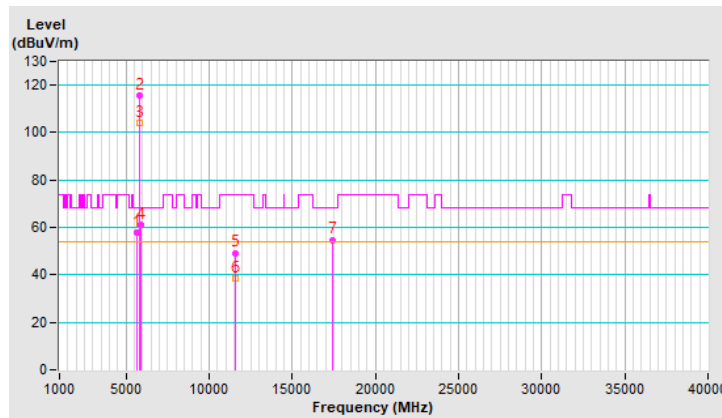


RF Mode	TX 802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5557.89	50.5 PK	68.2	-17.7	3.88 V	155	48.3	2.2
2	*5795.00	110.1 PK			3.88 V	155	107.4	2.7
3	*5795.00	98.6 AV			3.88 V	155	95.9	2.7
4	#5956.79	51.5 PK	68.2	-16.7	3.88 V	155	48.6	2.9
5	11590.00	47.1 PK	74.0	-26.9	2.03 V	305	34.8	12.3
6	11590.00	36.0 AV	54.0	-18.0	2.03 V	305	23.7	12.3
7	#17385.00	49.1 PK	68.2	-19.1	1.49 V	315	31.3	17.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

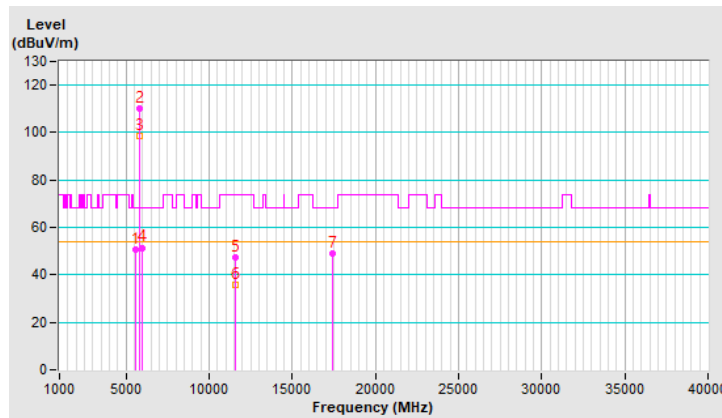


RF Mode	TX 802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.3 PK	74.0	-8.7	1.75 H	176	62.9	2.4
2	5150.00	52.3 AV	54.0	-1.7	1.75 H	176	49.9	2.4
3	*5210.00	106.4 PK			1.75 H	176	104.4	2.0
4	*5210.00	96.1 AV			1.75 H	176	94.1	2.0
5	5350.00	50.1 PK	74.0	-23.9	1.75 H	176	48.1	2.0
6	5350.00	39.2 AV	54.0	-14.8	1.75 H	176	37.2	2.0
7	#10420.00	53.2 PK	68.2	-15.0	1.76 H	329	41.2	12.0
8	15630.00	48.4 PK	74.0	-25.6	3.76 H	107	36.7	11.7
9	15630.00	35.2 AV	54.0	-18.8	3.76 H	107	23.5	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

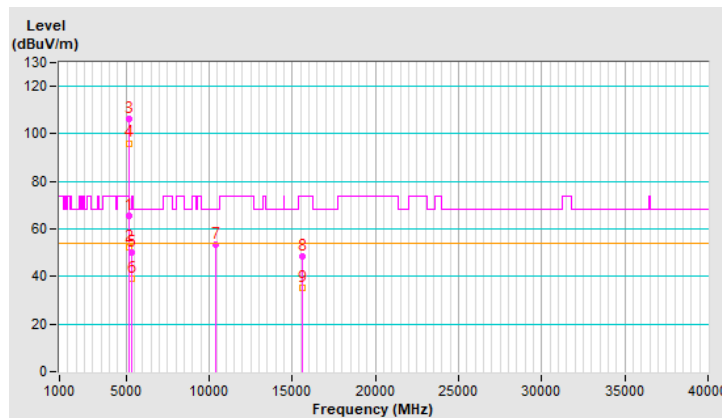


RF Mode	TX 802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	1.44 V	139	56.4	2.4
2	5150.00	47.4 AV	54.0	-6.6	1.44 V	139	45.0	2.4
3	*5210.00	98.2 PK			1.44 V	139	96.2	2.0
4	*5210.00	87.6 AV			1.44 V	139	85.6	2.0
5	5350.00	49.9 PK	74.0	-24.1	1.44 V	139	47.9	2.0
6	5350.00	37.6 AV	54.0	-16.4	1.44 V	139	35.6	2.0
7	#10420.00	47.9 PK	68.2	-20.3	3.23 V	214	35.9	12.0
8	15630.00	47.3 PK	74.0	-26.7	3.77 V	293	35.6	11.7
9	15630.00	37.9 AV	54.0	-16.1	3.77 V	293	26.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

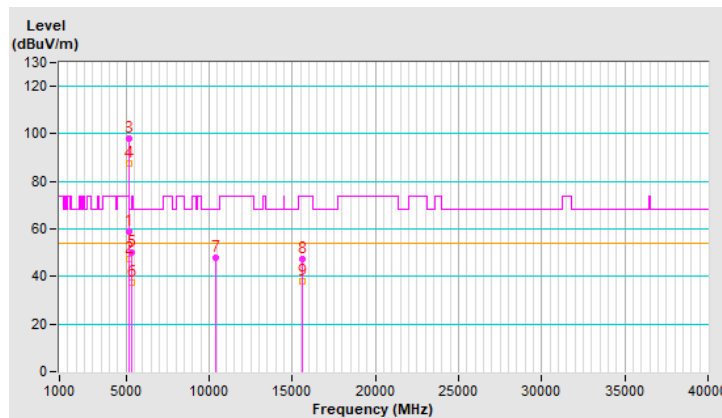


RF Mode	TX 802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5137.85	53.3 PK	74.0	-20.7	1.36 H	173	50.9	2.4
2	5137.85	40.5 AV	54.0	-13.5	1.36 H	173	38.1	2.4
3	*5290.00	106.7 PK			1.36 H	173	105.0	1.7
4	*5290.00	96.3 AV			1.36 H	173	94.6	1.7
5	5360.00	69.1 PK	74.0	-4.9	1.36 H	173	67.2	1.9
6	5360.00	52.4 AV	54.0	-1.6	1.36 H	173	50.5	1.9
7	#10580.00	53.3 PK	68.2	-14.9	1.78 H	305	41.6	11.7
8	15870.00	49.0 PK	74.0	-25.0	3.78 H	87	37.9	11.1
9	15870.00	35.6 AV	54.0	-18.4	3.78 H	87	24.5	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

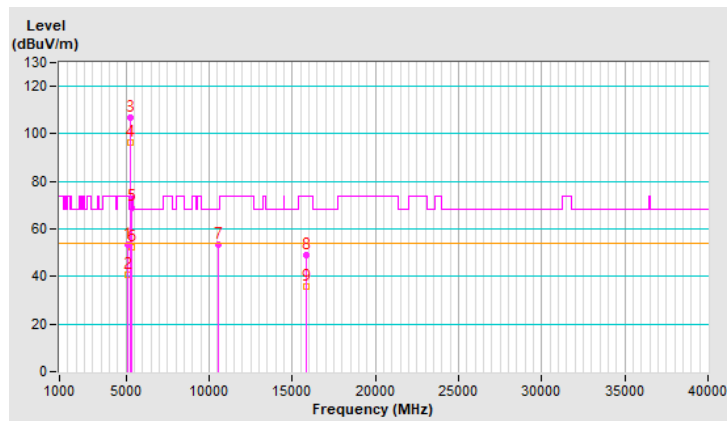


RF Mode	TX 802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.2 PK	74.0	-23.8	2.98 V	131	47.8	2.4
2	5150.00	39.1 AV	54.0	-14.9	2.98 V	131	36.7	2.4
3	*5290.00	101.3 PK			2.98 V	131	99.6	1.7
4	*5290.00	89.7 AV			2.98 V	131	88.0	1.7
5	5354.70	62.6 PK	74.0	-11.4	2.98 V	131	60.7	1.9
6	5354.70	46.0 AV	54.0	-8.0	2.98 V	131	44.1	1.9
7	#10580.00	47.4 PK	68.2	-20.8	3.29 V	200	35.7	11.7
8	15870.00	47.0 PK	74.0	-27.0	3.80 V	297	35.9	11.1
9	15870.00	38.1 AV	54.0	-15.9	3.80 V	297	27.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

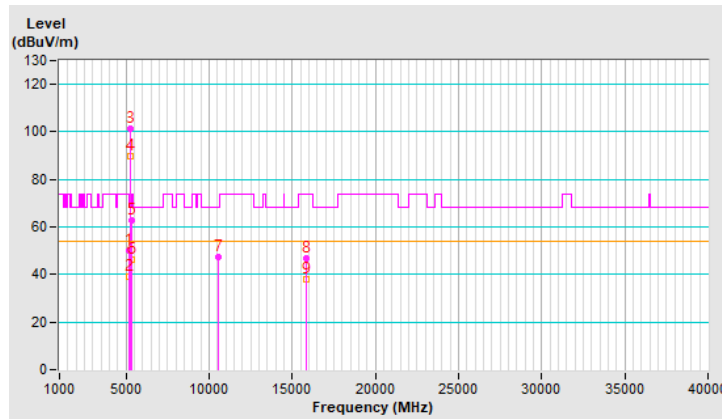


RF Mode	TX 802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.0 PK	74.0	-9.0	1.14 H	176	62.8	2.2
2	5460.00	51.0 AV	54.0	-3.0	1.14 H	176	48.8	2.2
3	#5470.00	66.7 PK	68.2	-1.5	1.14 H	176	64.5	2.2
4	*5530.00	105.9 PK			1.14 H	176	103.8	2.1
5	*5530.00	94.4 AV			1.14 H	176	92.3	2.1
6	#5844.80	51.4 PK	68.2	-16.8	1.14 H	176	48.6	2.8
7	11060.00	48.6 PK	74.0	-25.4	1.60 H	308	36.6	12.0
8	11060.00	37.1 AV	54.0	-16.9	1.60 H	308	25.1	12.0
9	#16590.00	47.7 PK	68.2	-20.5	3.76 H	108	33.4	14.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

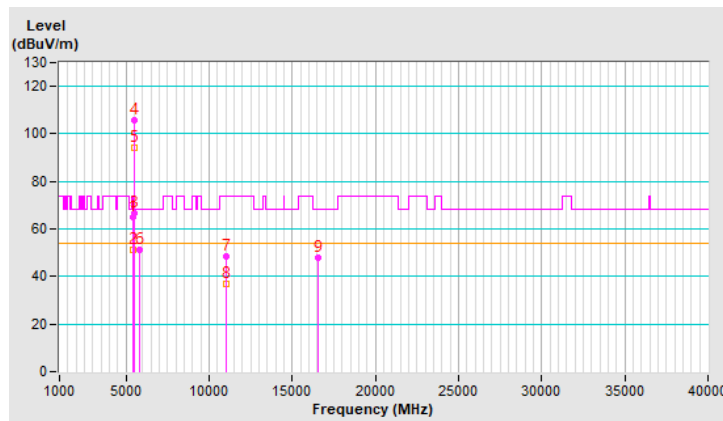


RF Mode	TX 802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5450.70	61.8 PK	74.0	-12.2	1.27 V	125	59.6	2.2
2	5450.70	48.3 AV	54.0	-5.7	1.27 V	125	46.1	2.2
3	#5466.00	62.9 PK	68.2	-5.3	1.27 V	125	60.7	2.2
4	*5530.00	100.9 PK			1.27 V	125	98.8	2.1
5	*5530.00	89.3 AV			1.27 V	125	87.2	2.1
6	#5826.91	52.3 PK	68.2	-15.9	1.27 V	125	49.5	2.8
7	11060.00	46.8 PK	74.0	-27.2	3.24 V	208	34.8	12.0
8	11060.00	35.5 AV	54.0	-18.5	3.24 V	208	23.5	12.0
9	#16590.00	46.6 PK	68.2	-21.6	3.74 V	300	32.3	14.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

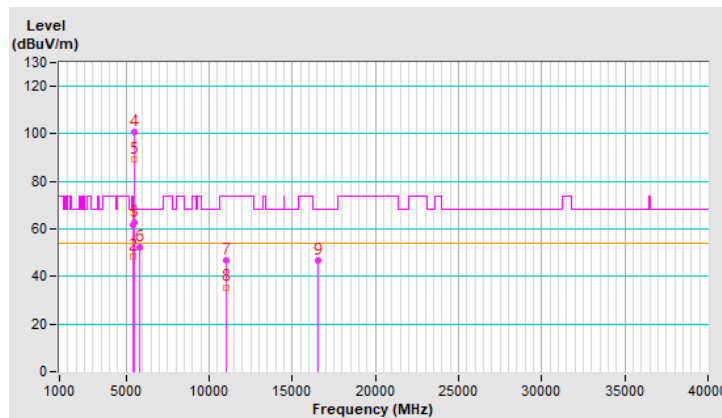


RF Mode	TX 802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	110.4 PK			1.50 H	177	108.2	2.2
2	*5610.00	98.5 AV			1.50 H	177	96.3	2.2
3	#5725.00	66.5 PK	68.2	-1.7	1.50 H	177	64.0	2.5
4	11220.00	49.0 PK	74.0	-25.0	1.65 H	291	36.9	12.1
5	11220.00	37.4 AV	54.0	-16.6	1.65 H	291	25.3	12.1
6	#16830.00	47.0 PK	68.2	-21.2	3.92 H	94	31.3	15.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

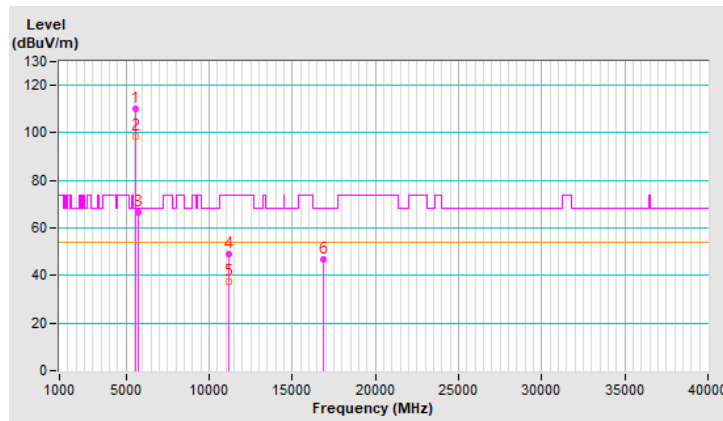


RF Mode	TX 802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	104.5 PK			1.23 V	130	102.3	2.2
2	*5610.00	93.5 AV			1.23 V	130	91.3	2.2
3	#5725.00	61.4 PK	68.2	-6.8	1.23 V	130	58.9	2.5
4	11220.00	46.8 PK	74.0	-27.2	3.28 V	226	34.7	12.1
5	11220.00	35.9 AV	54.0	-18.1	3.28 V	226	23.8	12.1
6	#16830.00	46.5 PK	68.2	-21.7	3.76 V	301	30.8	15.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

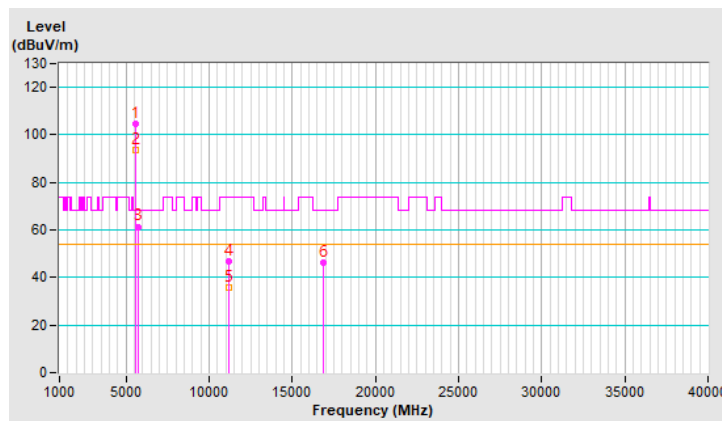


RF Mode	TX 802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.2 PK	74.0	-16.8	1.58 H	182	55.0	2.2
2	5460.00	40.1 AV	54.0	-13.9	1.58 H	182	37.9	2.2
3	#5470.00	57.6 PK	68.2	-10.6	1.58 H	182	55.4	2.2
4	*5690.00	110.9 PK			1.58 H	182	108.6	2.3
5	*5690.00	100.4 AV			1.58 H	182	98.1	2.3
6	#5850.00	66.5 PK	68.2	-1.7	1.58 H	182	63.6	2.9
7	11380.00	49.1 PK	74.0	-24.9	1.68 H	298	36.9	12.2
8	11380.00	37.9 AV	54.0	-16.1	1.68 H	298	25.7	12.2
9	#17070.00	47.2 PK	68.2	-21.0	3.87 H	121	30.6	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

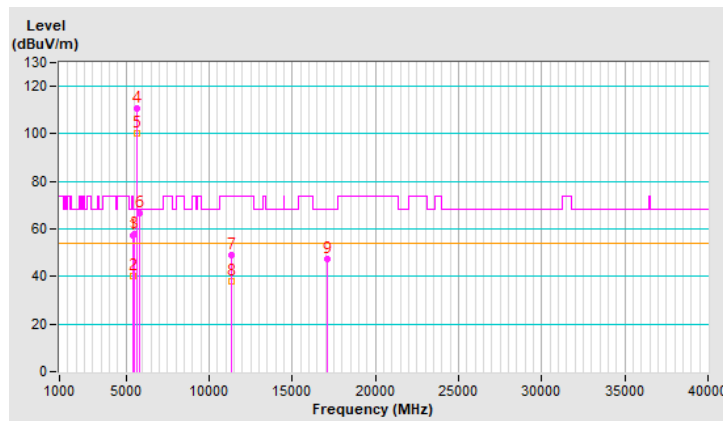


RF Mode	TX 802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.4 PK	74.0	-19.6	1.28 V	126	52.2	2.2
2	5460.00	40.2 AV	54.0	-13.8	1.28 V	126	38.0	2.2
3	#5470.00	56.2 PK	68.2	-12.0	1.28 V	126	54.0	2.2
4	*5690.00	106.1 PK			1.28 V	126	103.8	2.3
5	*5690.00	94.7 AV			1.28 V	126	92.4	2.3
6	#5850.00	60.4 PK	68.2	-7.8	1.28 V	126	57.5	2.9
7	11380.00	46.1 PK	74.0	-27.9	3.29 V	210	33.9	12.2
8	11380.00	34.9 AV	54.0	-19.1	3.29 V	210	22.7	12.2
9	#17070.00	46.5 PK	68.2	-21.7	3.75 V	282	29.9	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

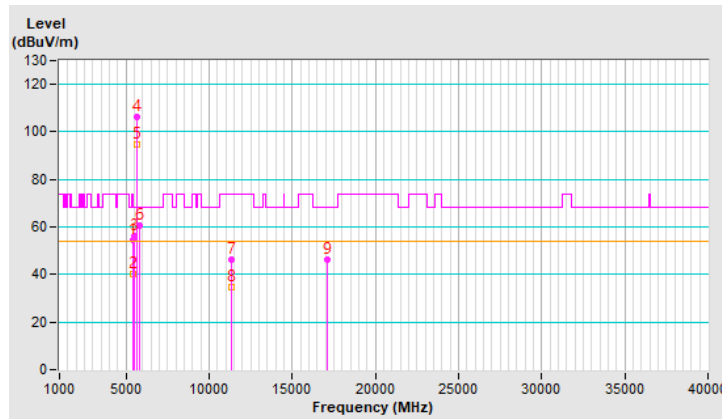




RF Mode	TX 802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5649.48	66.2 PK	68.2	-2.0	1.09 H	175	63.9	2.3
2	*5775.00	108.9 PK			1.09 H	175	106.3	2.6
3	*5775.00	98.0 AV			1.09 H	175	95.4	2.6
4	#5928.01	64.7 PK	68.2	-3.5	1.09 H	175	61.8	2.9
5	11550.00	49.0 PK	74.0	-25.0	1.87 H	325	36.7	12.3
6	11550.00	38.4 AV	54.0	-15.6	1.87 H	325	26.1	12.3
7	#17325.00	54.4 PK	68.2	-13.8	1.57 H	97	37.2	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

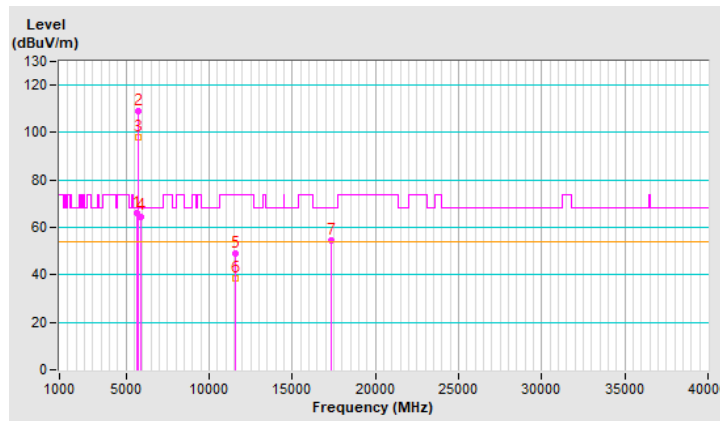


RF Mode	TX 802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.26	64.0 PK	68.2	-4.2	3.84 V	152	61.7	2.3
2	*5775.00	103.8 PK			3.84 V	152	101.2	2.6
3	*5775.00	92.5 AV			3.84 V	152	89.9	2.6
4	#5929.70	62.0 PK	68.2	-6.2	3.84 V	152	59.1	2.9
5	11550.00	46.4 PK	74.0	-27.6	2.09 V	299	34.1	12.3
6	11550.00	35.9 AV	54.0	-18.1	2.09 V	299	23.6	12.3
7	#17325.00	48.5 PK	68.2	-19.7	1.46 V	330	31.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

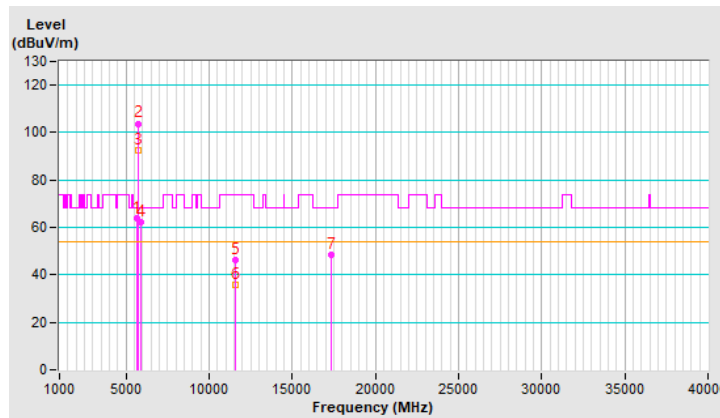




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5138.50	57.6 PK	74.0	-16.4	1.02 H	162	55.2	2.4
2	5138.50	46.1 AV	54.0	-7.9	1.02 H	162	43.7	2.4
3	*5180.00	122.3 PK			1.02 H	162	120.1	2.2
4	*5180.00	112.9 AV			1.02 H	162	110.7	2.2
5	#10360.00	57.3 PK	68.2	-10.9	1.45 H	300	45.6	11.7
6	15540.00	65.0 PK	74.0	-9.0	3.58 H	314	53.2	11.8
7	15540.00	47.8 AV	54.0	-6.2	3.58 H	314	36.0	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

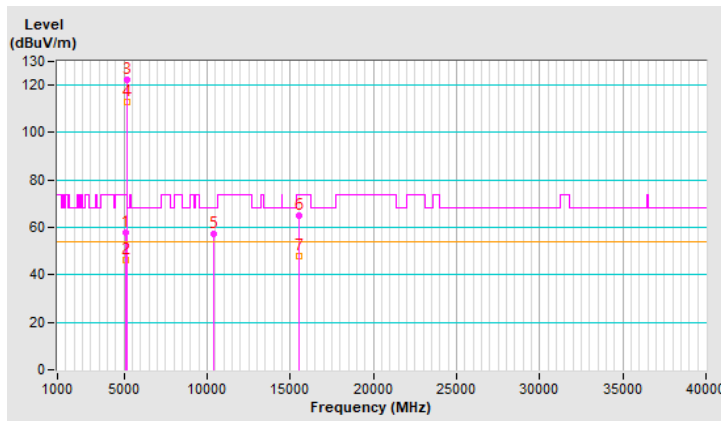




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5138.20	55.4 PK	74.0	-18.6	1.00 V	86	53.0	2.4
2	5138.20	44.4 AV	54.0	-9.6	1.00 V	86	42.0	2.4
3	*5180.00	120.1 PK			1.00 V	86	117.9	2.2
4	*5180.00	110.9 AV			1.00 V	86	108.7	2.2
5	#10360.00	61.5 PK	68.2	-6.7	3.48 V	296	49.8	11.7
6	15540.00	62.8 PK	74.0	-11.2	2.56 V	358	51.0	11.8
7	15540.00	46.2 AV	54.0	-7.8	2.56 V	358	34.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

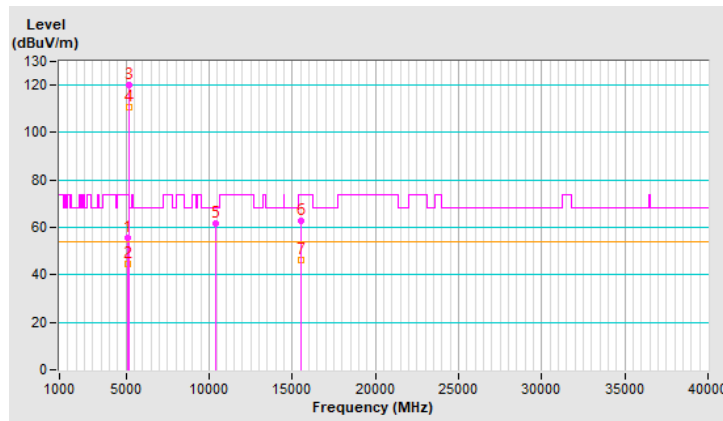


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5200.00	122.8 PK			1.00 H	158	120.7	2.1
2	*5200.00	113.4 AV			1.00 H	158	111.3	2.1
3	#10400.00	57.3 PK	68.2	-10.9	1.42 H	323	45.4	11.9
4	15600.00	64.9 PK	74.0	-9.1	3.62 H	297	53.4	11.5
5	15600.00	47.2 AV	54.0	-6.8	3.62 H	297	35.7	11.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

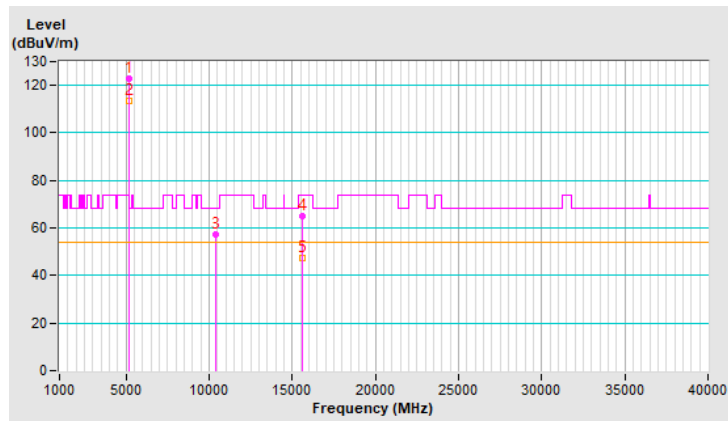




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	120.2 PK			1.34 V	60	118.1	2.1
2	*5200.00	111.3 AV			1.34 V	60	109.2	2.1
3	#10400.00	61.3 PK	68.2	-6.9	3.42 V	303	49.4	11.9
4	15600.00	62.0 PK	74.0	-12.0	2.58 V	350	50.5	11.5
5	15600.00	45.4 AV	54.0	-8.6	2.58 V	350	33.9	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

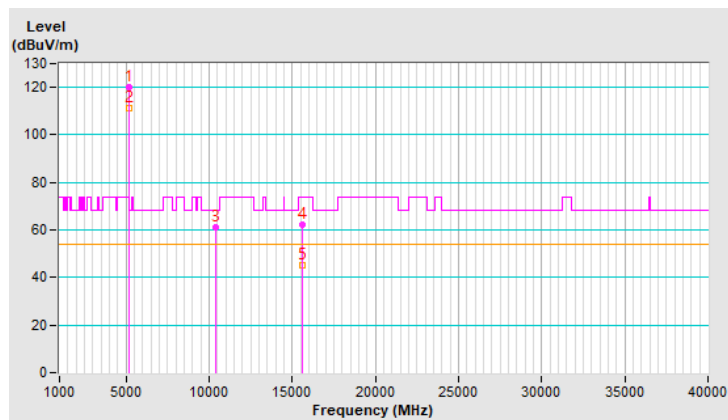


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5240.00	121.6 PK			1.08 H	157	119.7	1.9
2	*5240.00	112.5 AV			1.08 H	157	110.6	1.9
3	5350.00	52.2 PK	74.0	-21.8	1.08 H	157	50.2	2.0
4	5350.00	39.8 AV	54.0	-14.2	1.08 H	157	37.8	2.0
5	#10480.00	56.5 PK	68.2	-11.7	1.44 H	321	44.6	11.9
6	15720.00	64.5 PK	74.0	-9.5	3.63 H	322	52.8	11.7
7	15720.00	47.0 AV	54.0	-7.0	3.63 H	322	35.3	11.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

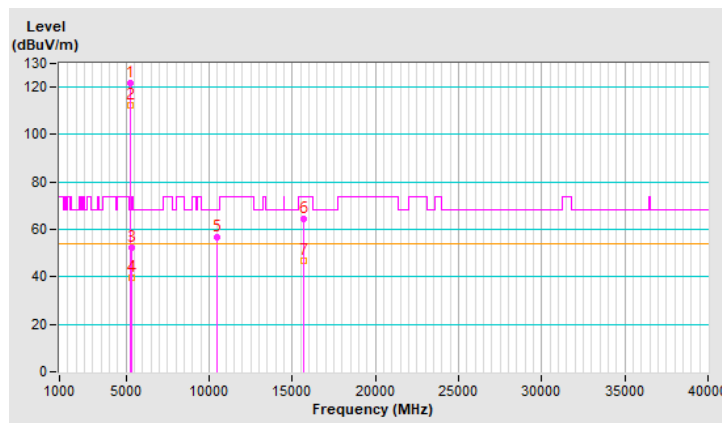


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5240.00	120.0 PK			1.33 V	50	118.1	1.9
2	*5240.00	110.9 AV			1.33 V	50	109.0	1.9
3	5350.00	52.1 PK	74.0	-21.9	1.33 V	50	50.1	2.0
4	5350.00	39.6 AV	54.0	-14.4	1.33 V	50	37.6	2.0
5	#10480.00	61.0 PK	68.2	-7.2	3.49 V	298	49.1	11.9
6	15720.00	62.5 PK	74.0	-11.5	2.55 V	354	50.8	11.7
7	15720.00	46.3 AV	54.0	-7.7	2.55 V	354	34.6	11.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

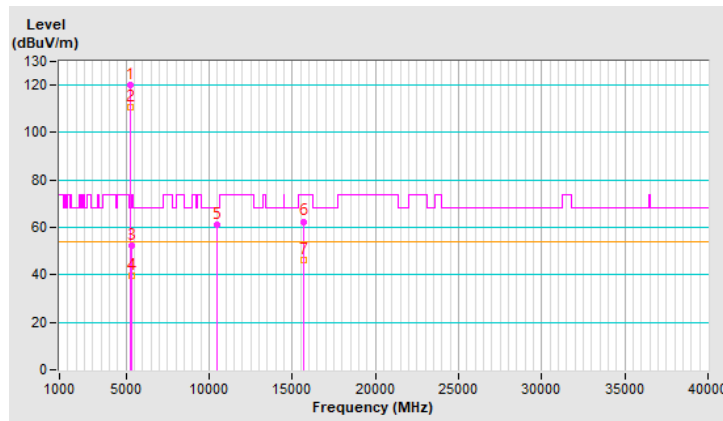


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.0 PK	74.0	-22.0	1.19 H	164	49.6	2.4
2	5150.00	39.5 AV	54.0	-14.5	1.19 H	164	37.1	2.4
3	*5260.00	123.0 PK			1.19 H	164	121.2	1.8
4	*5260.00	113.3 AV			1.19 H	164	111.5	1.8
5	#10520.00	57.6 PK	68.2	-10.6	1.41 H	308	45.6	12.0
6	15780.00	65.0 PK	74.0	-9.0	3.62 H	297	53.5	11.5
7	15780.00	47.3 AV	54.0	-6.7	3.62 H	297	35.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

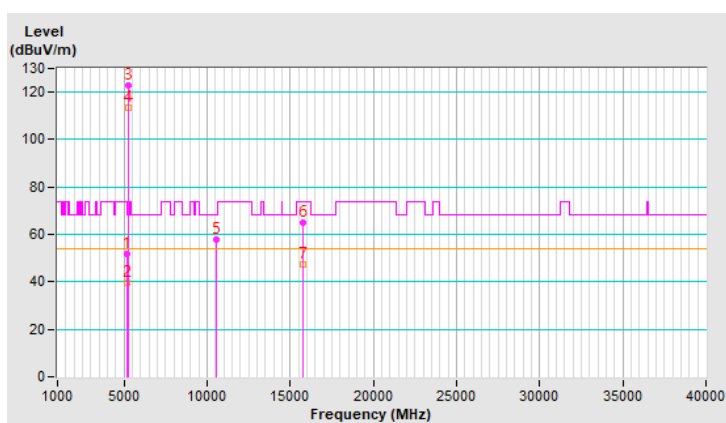


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.9 PK	74.0	-22.1	1.34 V	47	49.5	2.4
2	5150.00	39.1 AV	54.0	-14.9	1.34 V	47	36.7	2.4
3	*5260.00	119.8 PK			1.34 V	47	118.0	1.8
4	*5260.00	110.8 AV			1.34 V	47	109.0	1.8
5	#10520.00	60.9 PK	68.2	-7.3	3.48 V	293	48.9	12.0
6	15780.00	61.4 PK	74.0	-12.6	2.59 V	358	49.9	11.5
7	15780.00	45.4 AV	54.0	-8.6	2.59 V	358	33.9	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

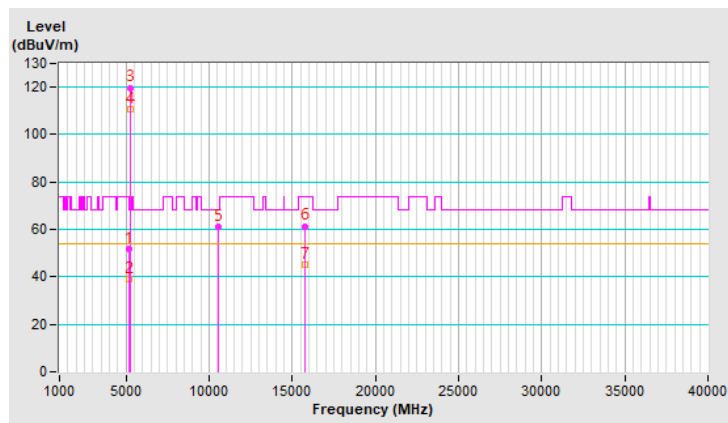


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	122.6 PK			1.07 H	164	120.9	1.7
2	*5300.00	113.2 AV			1.07 H	164	111.5	1.7
3	10600.00	57.6 PK	74.0	-16.4	1.40 H	294	45.9	11.7
4	10600.00	47.7 AV	54.0	-6.3	1.40 H	294	36.0	11.7
5	15900.00	64.3 PK	74.0	-9.7	3.55 H	314	53.2	11.1
6	15900.00	46.9 AV	54.0	-7.1	3.55 H	314	35.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

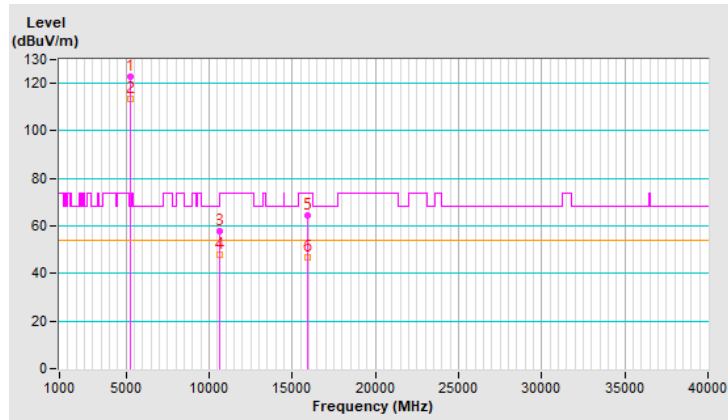


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	120.6 PK			1.36 V	73	118.9	1.7
2	*5300.00	111.8 AV			1.36 V	73	110.1	1.7
3	10600.00	60.4 PK	74.0	-13.6	3.47 V	308	48.7	11.7
4	10600.00	48.5 AV	54.0	-5.5	3.47 V	308	36.8	11.7
5	15900.00	61.7 PK	74.0	-12.3	2.62 V	337	50.6	11.1
6	15900.00	45.4 AV	54.0	-8.6	2.62 V	337	34.3	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

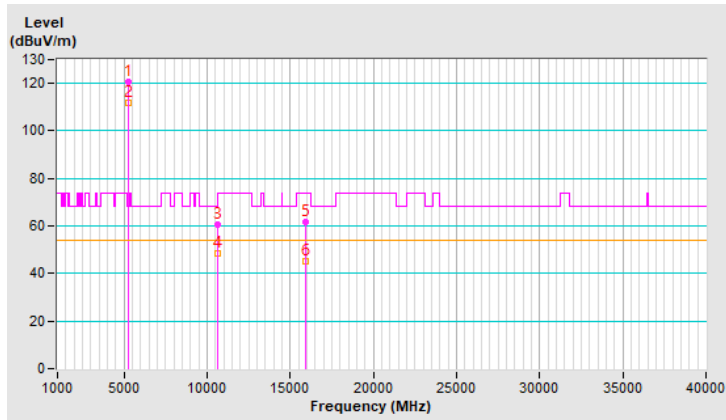


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	123.4 PK			1.50 H	165	121.7	1.7
2	*5320.00	113.6 AV			1.50 H	165	111.9	1.7
3	5361.00	71.8 PK	74.0	-2.2	1.50 H	165	69.9	1.9
4	5361.00	44.2 AV	54.0	-9.8	1.50 H	165	42.3	1.9
5	5368.60	56.7 PK	74.0	-17.3	1.50 H	165	54.8	1.9
6	5368.60	47.9 AV	54.0	-6.1	1.50 H	165	46.0	1.9
7	10640.00	57.2 PK	74.0	-16.8	1.34 H	307	45.6	11.6
8	10640.00	47.6 AV	54.0	-6.4	1.34 H	307	36.0	11.6
9	15960.00	64.6 PK	74.0	-9.4	3.55 H	321	53.2	11.4
10	15960.00	47.2 AV	54.0	-6.8	3.55 H	321	35.8	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

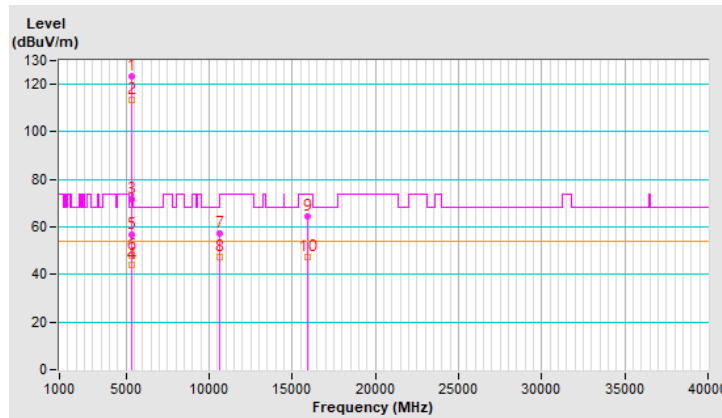


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	120.3 PK			1.00 V	94	118.6	1.7
2	*5320.00	110.0 AV			1.00 V	94	108.3	1.7
3	5363.00	67.8 PK	74.0	-6.2	1.00 V	94	65.9	1.9
4	5363.00	40.8 AV	54.0	-13.2	1.00 V	94	38.9	1.9
5	5368.20	53.2 PK	74.0	-20.8	1.00 V	94	51.3	1.9
6	5368.20	44.2 AV	54.0	-9.8	1.00 V	94	42.3	1.9
7	10640.00	61.4 PK	74.0	-12.6	3.50 V	299	49.8	11.6
8	10640.00	48.9 AV	54.0	-5.1	3.50 V	299	37.3	11.6
9	15960.00	61.4 PK	74.0	-12.6	2.59 V	356	50.0	11.4
10	15960.00	45.3 AV	54.0	-8.7	2.59 V	356	33.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

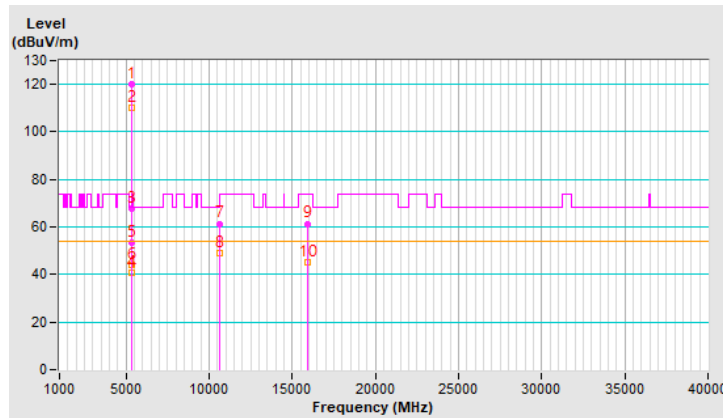


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	5458.00	65.3 PK	74.0	-8.7	1.50 H	167	63.1	2.2
2	5458.00	42.5 AV	54.0	-11.5	1.50 H	167	40.3	2.2
3	#5470.00	60.8 PK	68.2	-7.4	1.50 H	167	58.6	2.2
4	*5500.00	121.3 PK			1.50 H	167	119.2	2.1
5	*5500.00	111.0 AV			1.50 H	167	108.9	2.1
6	11000.00	57.0 PK	74.0	-17.0	1.37 H	314	44.9	12.1
7	11000.00	47.3 AV	54.0	-6.7	1.37 H	314	35.2	12.1
8	#16500.00	64.7 PK	68.2	-3.5	3.58 H	321	51.3	13.4

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

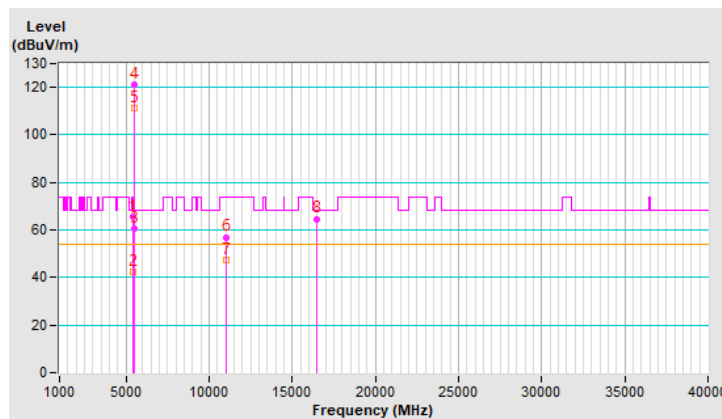


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5458.00	66.6 PK	74.0	-7.4	1.02 V	124	64.4	2.2
2	5458.00	42.1 AV	54.0	-11.9	1.02 V	124	39.9	2.2
3	#5470.00	62.0 PK	68.2	-6.2	1.02 V	124	59.8	2.2
4	*5500.00	118.1 PK			1.02 V	124	116.0	2.1
5	*5500.00	108.5 AV			1.02 V	124	106.4	2.1
6	11000.00	61.4 PK	74.0	-12.6	3.43 V	293	49.3	12.1
7	11000.00	48.9 AV	54.0	-5.1	3.43 V	293	36.8	12.1
8	#16500.00	62.2 PK	68.2	-6.0	2.51 V	339	48.8	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

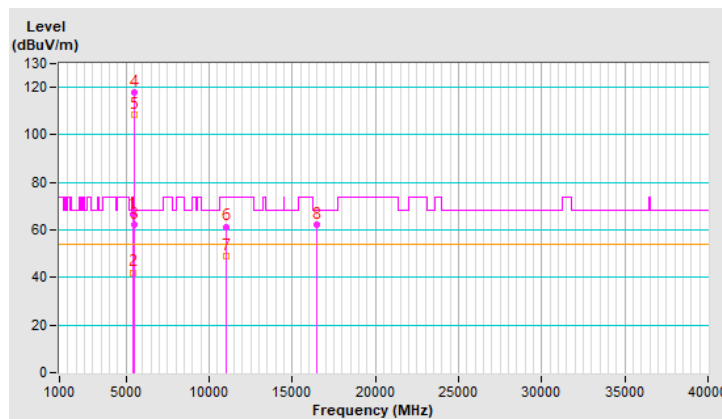




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5580.00	122.2 PK			1.08 H	173	120.0	2.2
2	*5580.00	112.6 AV			1.08 H	173	110.4	2.2
3	11160.00	57.1 PK	74.0	-16.9	1.39 H	297	45.2	11.9
4	11160.00	47.2 AV	54.0	-6.8	1.39 H	297	35.3	11.9
5	#16740.00	64.6 PK	68.2	-3.6	3.61 H	305	49.4	15.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

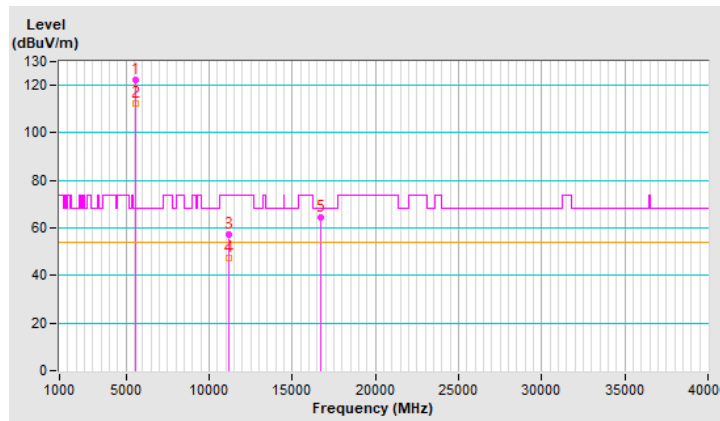




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	119.7 PK			1.33 V	72	117.5	2.2
2	*5580.00	110.9 AV			1.33 V	72	108.7	2.2
3	11160.00	60.7 PK	74.0	-13.3	3.44 V	303	48.8	11.9
4	11160.00	48.6 AV	54.0	-5.4	3.44 V	303	36.7	11.9
5	#16740.00	62.4 PK	68.2	-5.8	2.54 V	340	47.2	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

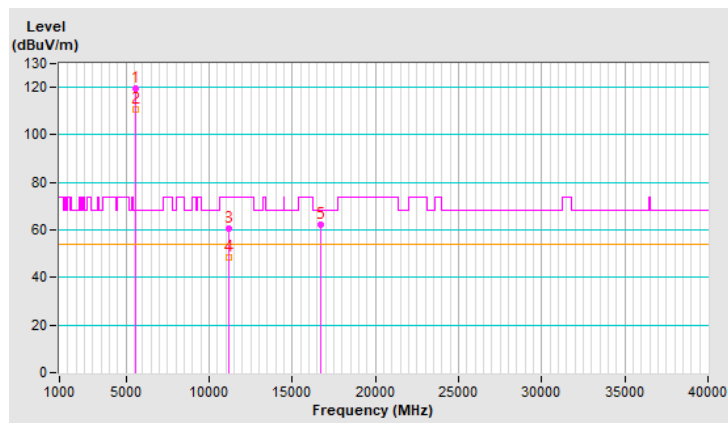




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	123.1 PK			1.50 H	151	120.8	2.3
2	*5700.00	111.0 AV			1.50 H	151	108.7	2.3
3	#5725.00	66.3 PK	68.2	-1.9	1.50 H	151	63.8	2.5
4	11400.00	57.2 PK	74.0	-16.8	1.39 H	295	45.0	12.2
5	11400.00	47.5 AV	54.0	-6.5	1.39 H	295	35.3	12.2
6	#17100.00	64.7 PK	68.2	-3.5	3.61 H	296	48.1	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

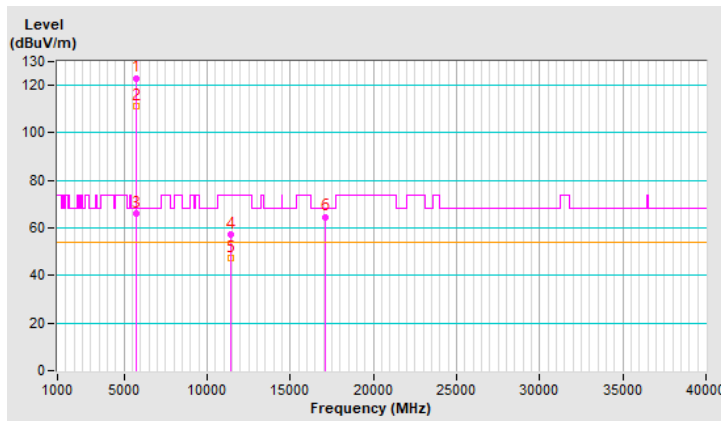


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	121.3 PK			1.20 V	80	119.0	2.3
2	*5700.00	109.3 AV			1.20 V	80	107.0	2.3
3	#5725.00	62.4 PK	68.2	-5.8	1.20 V	80	59.9	2.5
4	11400.00	61.7 PK	74.0	-12.3	3.41 V	303	49.5	12.2
5	11400.00	49.3 AV	54.0	-4.7	3.41 V	303	37.1	12.2
6	#17100.00	61.9 PK	68.2	-6.3	2.58 V	352	45.3	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

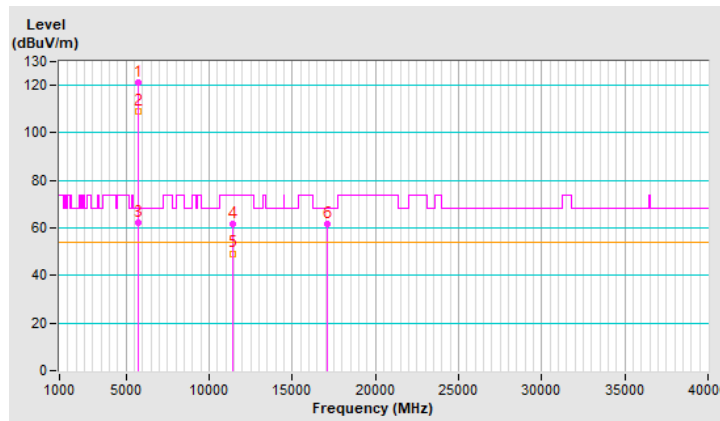


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.6 PK	74.0	-23.4	1.03 H	175	48.4	2.2
2	5460.00	38.9 AV	54.0	-15.1	1.03 H	175	36.7	2.2
3	#5470.00	51.5 PK	68.2	-16.7	1.03 H	175	49.3	2.2
4	*5720.00	121.8 PK			1.03 H	175	119.4	2.4
5	*5720.00	112.6 AV			1.03 H	175	110.2	2.4
6	#5850.00	52.1 PK	68.2	-16.1	1.03 H	175	49.2	2.9
7	11440.00	57.4 PK	74.0	-16.6	1.41 H	317	45.2	12.2
8	11440.00	47.5 AV	54.0	-6.5	1.41 H	317	35.3	12.2
9	#17160.00	65.1 PK	68.2	-3.1	3.57 H	292	48.6	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

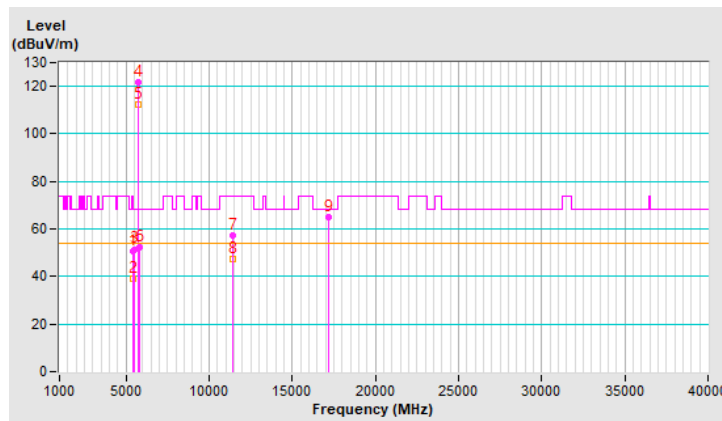


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.5 PK	74.0	-23.5	1.29 V	63	48.3	2.2
2	5460.00	38.8 AV	54.0	-15.2	1.29 V	63	36.6	2.2
3	#5470.00	52.0 PK	68.2	-16.2	1.29 V	63	49.8	2.2
4	*5720.00	119.8 PK			1.29 V	63	117.4	2.4
5	*5720.00	110.8 AV			1.29 V	63	108.4	2.4
6	#5850.00	51.9 PK	68.2	-16.3	1.29 V	63	49.0	2.9
7	11440.00	60.8 PK	74.0	-13.2	3.51 V	305	48.6	12.2
8	11440.00	48.3 AV	54.0	-5.7	3.51 V	305	36.1	12.2
9	#17160.00	62.3 PK	68.2	-5.9	2.51 V	355	45.8	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

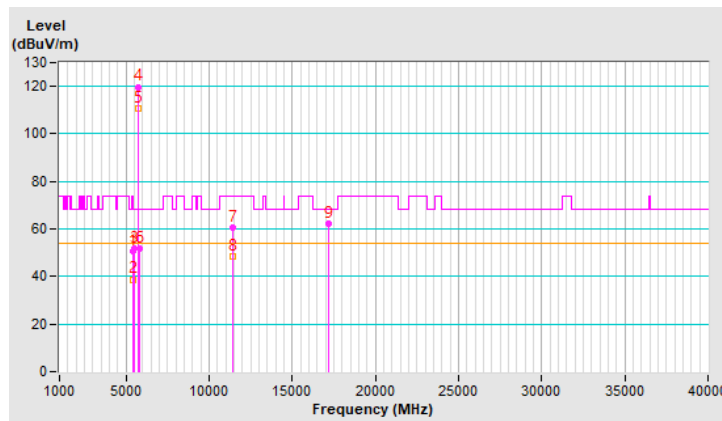




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5573.16	51.7 PK	68.2	-16.5	1.50 H	307	49.5	2.2
2	*5745.00	123.0 PK			1.50 H	307	120.5	2.5
3	*5745.00	113.1 AV			1.50 H	307	110.6	2.5
4	#5959.08	50.7 PK	68.2	-17.5	1.50 H	307	47.8	2.9
5	11490.00	57.1 PK	74.0	-16.9	1.44 H	306	44.7	12.4
6	11490.00	47.5 AV	54.0	-6.5	1.44 H	306	35.1	12.4
7	#17235.00	64.6 PK	68.2	-3.6	3.59 H	315	47.9	16.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

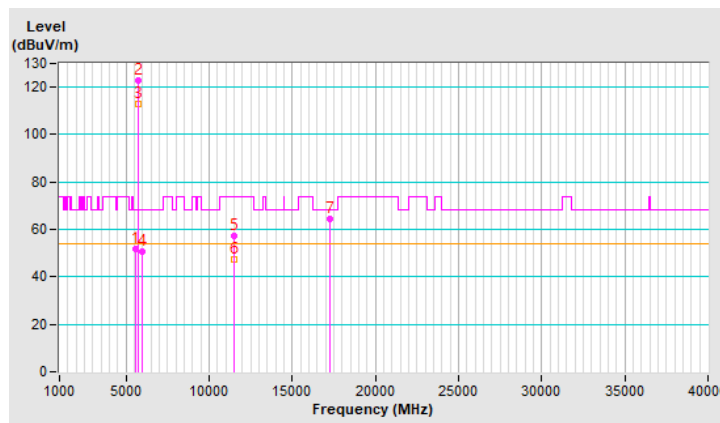


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5645.51	51.6 PK	68.2	-16.6	3.79 V	126	49.3	2.3
2	*5745.00	120.3 PK			3.79 V	126	117.8	2.5
3	*5745.00	110.6 AV			3.79 V	126	108.1	2.5
4	#5964.40	51.6 PK	68.2	-16.6	3.79 V	126	48.7	2.9
5	11490.00	61.3 PK	74.0	-12.7	3.42 V	310	48.9	12.4
6	11490.00	49.2 AV	54.0	-4.8	3.42 V	310	36.8	12.4
7	#17235.00	62.1 PK	68.2	-6.1	2.59 V	347	45.4	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

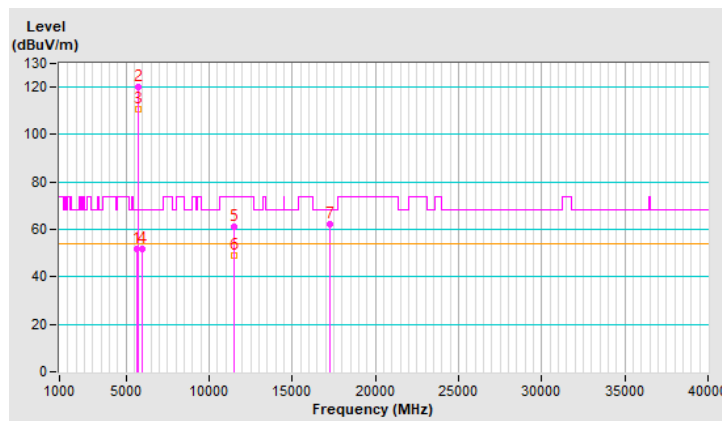


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5570.25	51.2 PK	68.2	-17.0	1.99 H	274	49.0	2.2
2	*5785.00	122.8 PK			1.99 H	274	120.1	2.7
3	*5785.00	113.0 AV			1.99 H	274	110.3	2.7
4	#5969.97	51.3 PK	68.2	-16.9	1.99 H	274	48.4	2.9
5	11570.00	56.6 PK	74.0	-17.4	1.40 H	319	44.2	12.4
6	11570.00	47.0 AV	54.0	-7.0	1.40 H	319	34.6	12.4
7	#17355.00	64.2 PK	68.2	-4.0	3.62 H	307	46.6	17.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

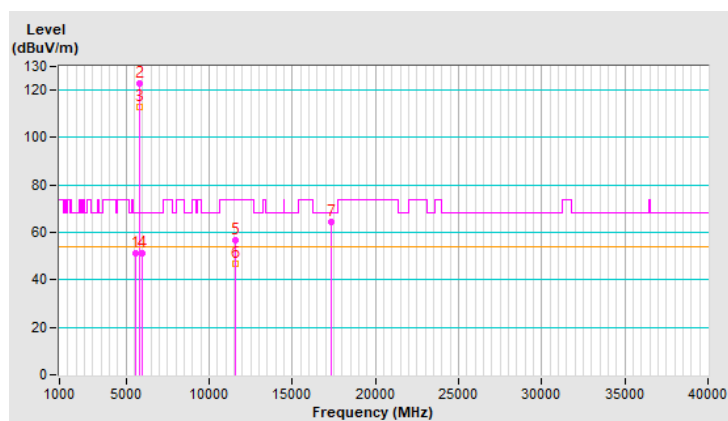


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5619.11	50.3 PK	68.2	-17.9	3.67 V	128	48.1	2.2
2	*5785.00	119.5 PK			3.67 V	128	116.8	2.7
3	*5785.00	110.1 AV			3.67 V	128	107.4	2.7
4	#6002.06	51.0 PK	68.2	-17.2	3.67 V	128	48.1	2.9
5	11570.00	61.5 PK	74.0	-12.5	3.46 V	286	49.1	12.4
6	11570.00	49.1 AV	54.0	-4.9	3.46 V	286	36.7	12.4
7	#17355.00	62.3 PK	68.2	-5.9	2.62 V	359	44.7	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

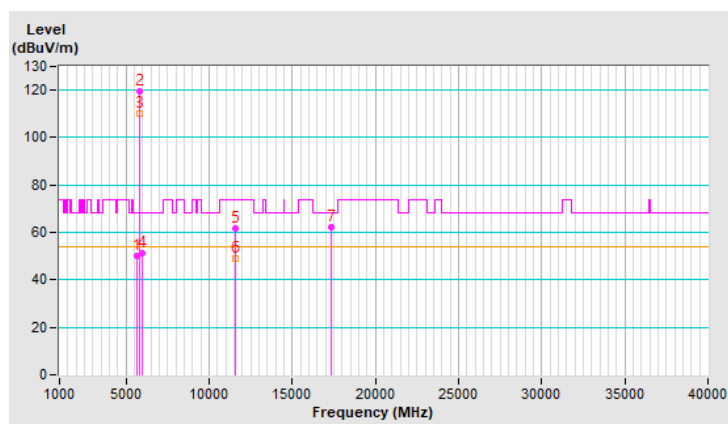




RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5604.71	50.7 PK	68.2	-17.5	1.98 H	288	48.5	2.2
2	*5825.00	122.2 PK			1.98 H	288	119.4	2.8
3	*5825.00	111.6 AV			1.98 H	288	108.8	2.8
4	#5986.28	51.7 PK	68.2	-16.5	1.98 H	288	48.8	2.9
5	11650.00	57.1 PK	74.0	-16.9	1.40 H	310	45.2	11.9
6	11650.00	47.3 AV	54.0	-6.7	1.40 H	310	35.4	11.9
7	#17475.00	64.8 PK	68.2	-3.4	3.60 H	306	46.3	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

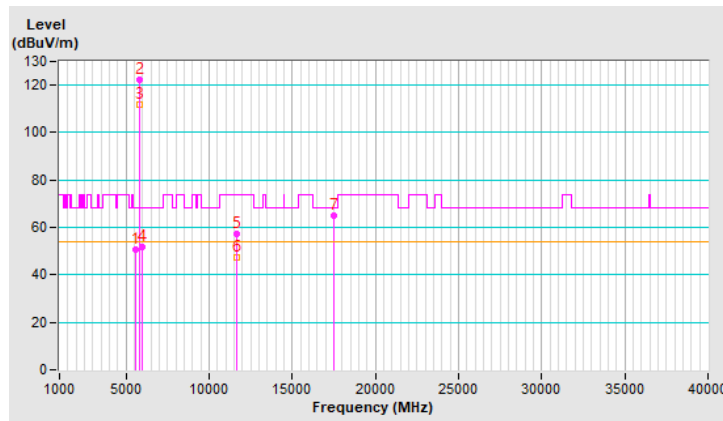


RF Mode	TX 20 MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5619.15	51.6 PK	68.2	-16.6	3.66 V	130	49.4	2.2
2	*5825.00	119.1 PK			3.66 V	130	116.3	2.8
3	*5825.00	108.9 AV			3.66 V	130	106.1	2.8
4	#5943.82	50.4 PK	68.2	-17.8	3.66 V	130	47.5	2.9
5	11650.00	61.0 PK	74.0	-13.0	3.47 V	299	49.1	11.9
6	11650.00	48.8 AV	54.0	-5.2	3.47 V	299	36.9	11.9
7	#17475.00	62.1 PK	68.2	-6.1	2.57 V	360	43.6	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

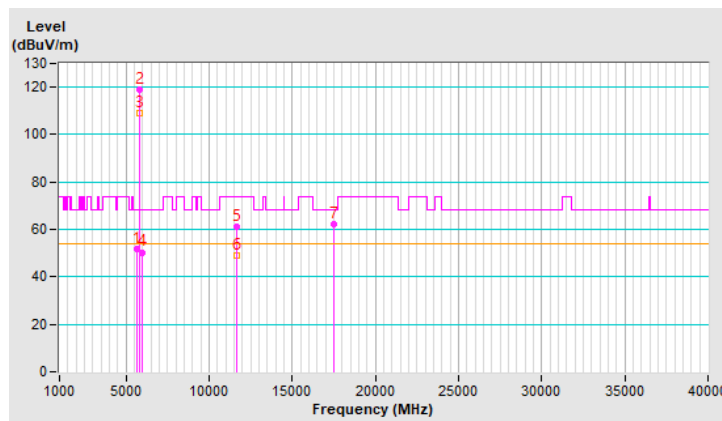


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.3 PK	74.0	-3.7	1.05 H	159	67.9	2.4
2	5150.00	46.4 AV	54.0	-7.6	1.05 H	159	44.0	2.4
3	*5180.00	121.3 PK			1.05 H	159	119.1	2.2
4	*5180.00	110.7 AV			1.05 H	159	108.5	2.2
5	#10360.00	55.7 PK	68.2	-12.5	1.15 H	306	44.0	11.7
6	15540.00	63.9 PK	74.0	-10.1	3.45 H	283	52.1	11.8
7	15540.00	46.3 AV	54.0	-7.7	3.45 H	283	34.5	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

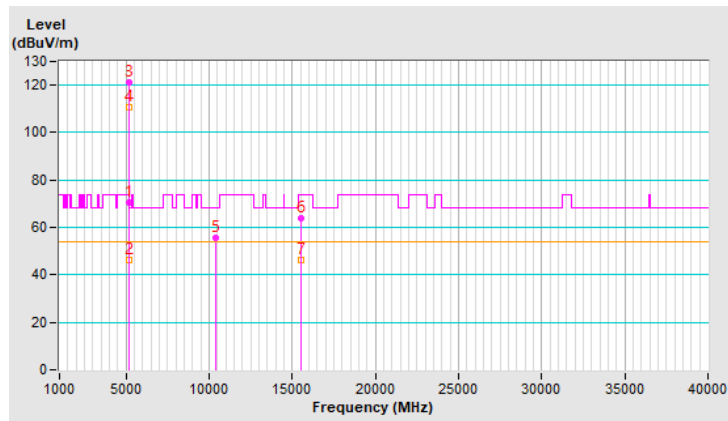


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.8 PK	74.0	-14.2	1.10 V	90	57.4	2.4
2	5150.00	44.5 AV	54.0	-9.5	1.10 V	90	42.1	2.4
3	*5180.00	118.6 PK			1.10 V	90	116.4	2.2
4	*5180.00	109.1 AV			1.10 V	90	106.9	2.2
5	#10360.00	59.9 PK	68.2	-8.3	3.36 V	287	48.2	11.7
6	15540.00	60.8 PK	74.0	-13.2	2.39 V	337	49.0	11.8
7	15540.00	44.2 AV	54.0	-9.8	2.39 V	337	32.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

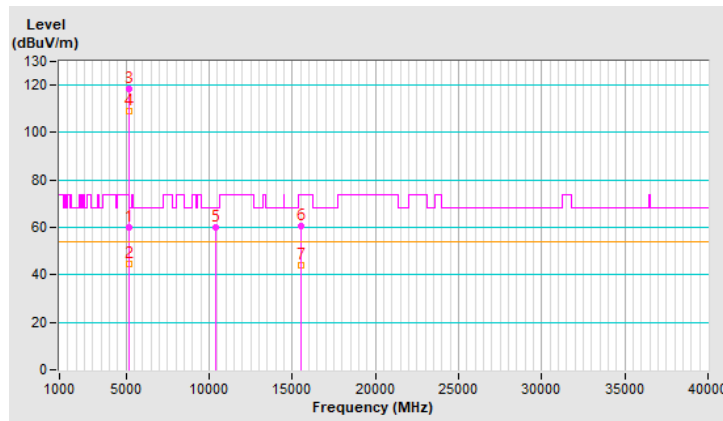


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	121.5 PK			1.03 H	169	119.4	2.1
2	*5200.00	110.8 AV			1.03 H	169	108.7	2.1
3	#10400.00	55.7 PK	68.2	-12.5	1.14 H	319	43.8	11.9
4	15600.00	63.7 PK	74.0	-10.3	3.44 H	281	52.2	11.5
5	15600.00	46.3 AV	54.0	-7.7	3.44 H	281	34.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

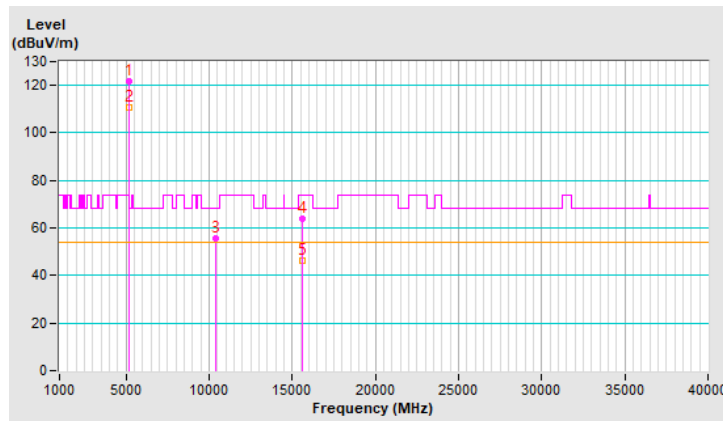




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	118.9 PK			1.16 V	77	116.8	2.1
2	*5200.00	109.1 AV			1.16 V	77	107.0	2.1
3	#10400.00	59.3 PK	68.2	-8.9	3.34 V	288	47.4	11.9
4	15600.00	60.8 PK	74.0	-13.2	2.39 V	349	49.3	11.5
5	15600.00	44.2 AV	54.0	-9.8	2.39 V	349	32.7	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

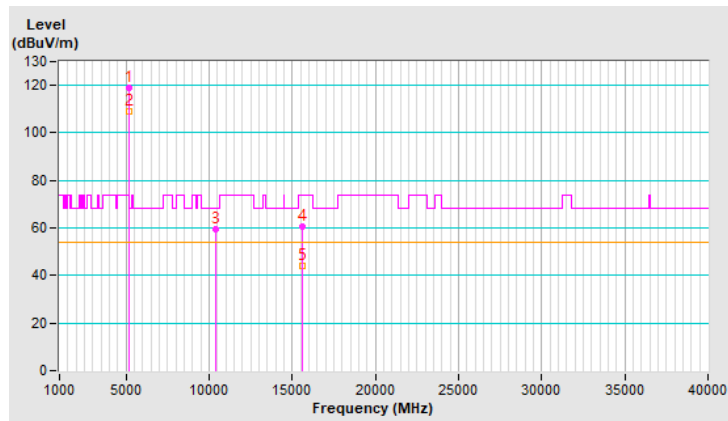


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	121.4 PK			1.00 H	173	119.5	1.9
2	*5240.00	111.0 AV			1.00 H	173	109.1	1.9
3	5350.00	52.4 PK	74.0	-21.6	1.00 H	173	50.4	2.0
4	5350.00	40.0 AV	54.0	-14.0	1.00 H	173	38.0	2.0
5	#10480.00	56.0 PK	68.2	-12.2	1.18 H	292	44.1	11.9
6	15720.00	63.4 PK	74.0	-10.6	3.42 H	269	51.7	11.7
7	15720.00	45.8 AV	54.0	-8.2	3.42 H	269	34.1	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

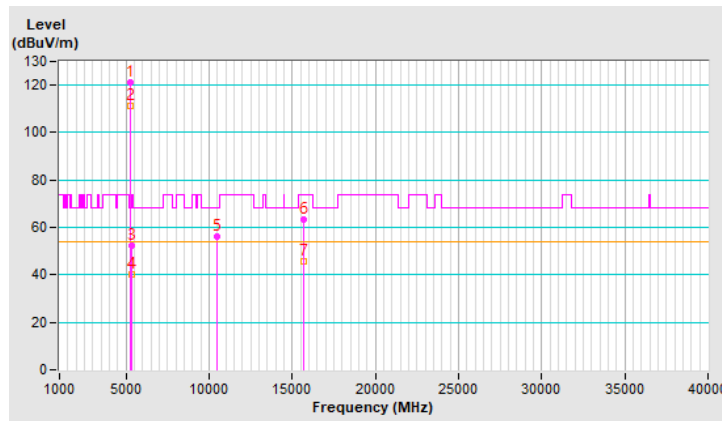


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	118.1 PK			1.13 V	101	116.2	1.9
2	*5240.00	108.6 AV			1.13 V	101	106.7	1.9
3	5350.00	52.2 PK	74.0	-21.8	1.13 V	101	50.2	2.0
4	5350.00	39.4 AV	54.0	-14.6	1.13 V	101	37.4	2.0
5	#10480.00	59.6 PK	68.2	-8.6	3.41 V	296	47.7	11.9
6	15720.00	61.4 PK	74.0	-12.6	2.35 V	330	49.7	11.7
7	15720.00	44.6 AV	54.0	-9.4	2.35 V	330	32.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

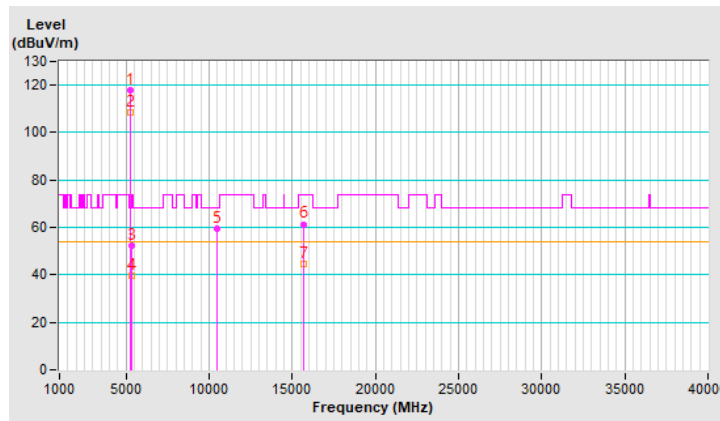


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.1 PK	74.0	-21.9	1.02 H	155	49.7	2.4
2	5150.00	39.6 AV	54.0	-14.4	1.02 H	155	37.2	2.4
3	*5260.00	120.9 PK			1.02 H	155	119.1	1.8
4	*5260.00	110.5 AV			1.02 H	155	108.7	1.8
5	#10520.00	55.7 PK	68.2	-12.5	1.17 H	300	43.7	12.0
6	15780.00	63.6 PK	74.0	-10.4	3.39 H	282	52.1	11.5
7	15780.00	46.0 AV	54.0	-8.0	3.39 H	282	34.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

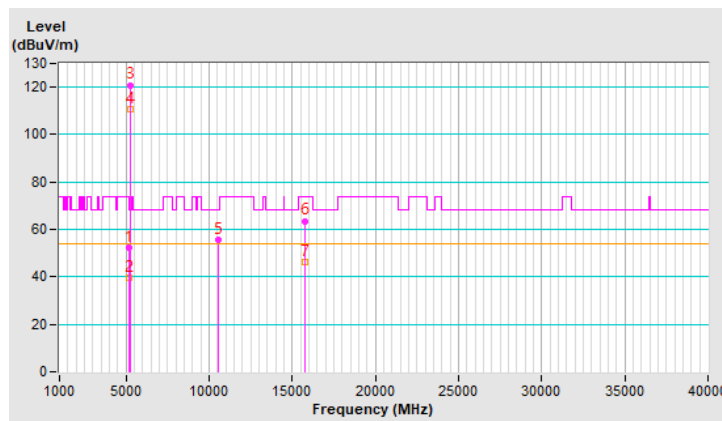


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.6 PK	74.0	-21.4	1.06 V	79	50.2	2.4
2	5150.00	39.9 AV	54.0	-14.1	1.06 V	79	37.5	2.4
3	*5260.00	118.9 PK			1.06 V	79	117.1	1.8
4	*5260.00	109.6 AV			1.06 V	79	107.8	1.8
5	#10520.00	60.1 PK	68.2	-8.1	3.38 V	275	48.1	12.0
6	15780.00	60.9 PK	74.0	-13.1	2.45 V	322	49.4	11.5
7	15780.00	44.3 AV	54.0	-9.7	2.45 V	322	32.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

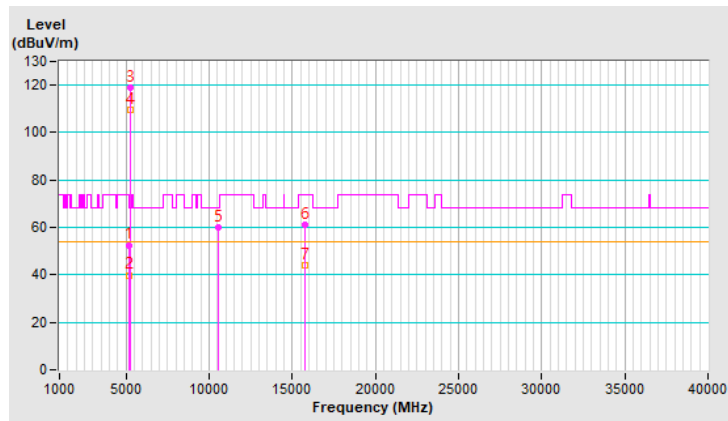


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	121.1 PK			1.09 H	160	119.4	1.7
2	*5300.00	110.4 AV			1.09 H	160	108.7	1.7
3	10600.00	56.2 PK	74.0	-17.8	1.09 H	300	44.5	11.7
4	10600.00	46.3 AV	54.0	-7.7	1.09 H	300	34.6	11.7
5	15900.00	64.2 PK	74.0	-9.8	3.48 H	268	53.1	11.1
6	15900.00	46.7 AV	54.0	-7.3	3.48 H	268	35.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

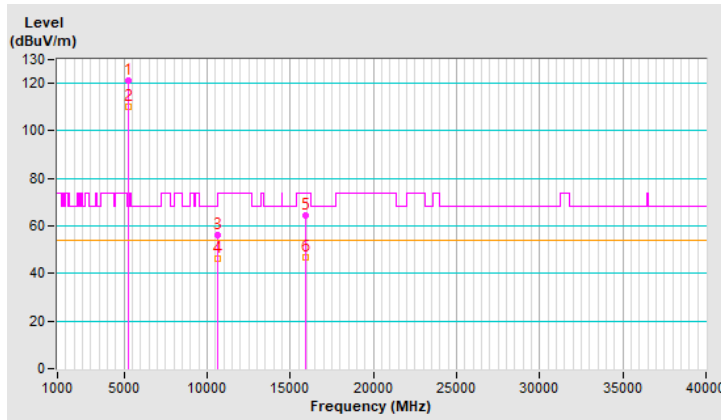


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	118.1 PK			1.08 V	83	116.4	1.7
2	*5300.00	108.8 AV			1.08 V	83	107.1	1.7
3	10600.00	60.1 PK	74.0	-13.9	3.39 V	298	48.4	11.7
4	10600.00	47.4 AV	54.0	-6.6	3.39 V	298	35.7	11.7
5	15900.00	60.9 PK	74.0	-13.1	2.44 V	333	49.8	11.1
6	15900.00	44.2 AV	54.0	-9.8	2.44 V	333	33.1	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

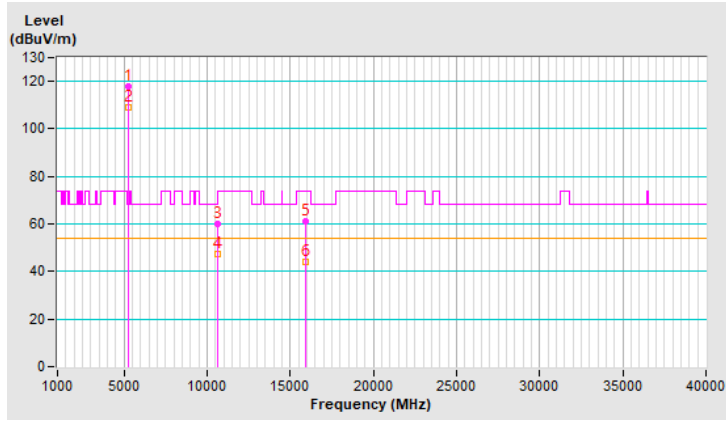


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	121.6 PK			1.52 H	169	119.9	1.7
2	*5320.00	112.8 AV			1.52 H	169	111.1	1.7
3	5355.80	69.7 PK	74.0	-4.3	1.52 H	169	67.8	1.9
4	5355.80	48.9 AV	54.0	-5.1	1.52 H	169	47.0	1.9
5	10640.00	55.4 PK	74.0	-18.6	1.16 H	319	43.8	11.6
6	10640.00	45.4 AV	54.0	-8.6	1.16 H	319	33.8	11.6
7	15960.00	63.6 PK	74.0	-10.4	3.45 H	280	52.2	11.4
8	15960.00	45.9 AV	54.0	-8.1	3.45 H	280	34.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

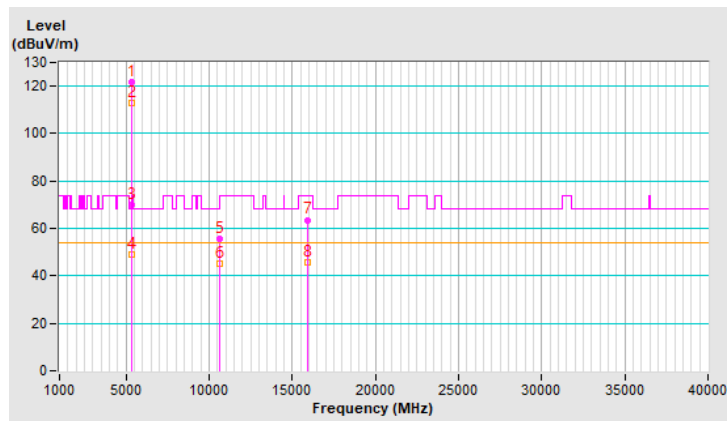


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.8 PK			1.05 V	97	117.1	1.7
2	*5320.00	109.2 AV			1.05 V	97	107.5	1.7
3	5355.00	65.8 PK	74.0	-8.2	1.05 V	97	63.9	1.9
4	5355.00	44.9 AV	54.0	-9.1	1.05 V	97	43.0	1.9
5	10640.00	59.3 PK	74.0	-14.7	3.32 V	302	47.7	11.6
6	10640.00	46.4 AV	54.0	-7.6	3.32 V	302	34.8	11.6
7	15960.00	61.8 PK	74.0	-12.2	2.33 V	346	50.4	11.4
8	15960.00	44.8 AV	54.0	-9.2	2.33 V	346	33.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

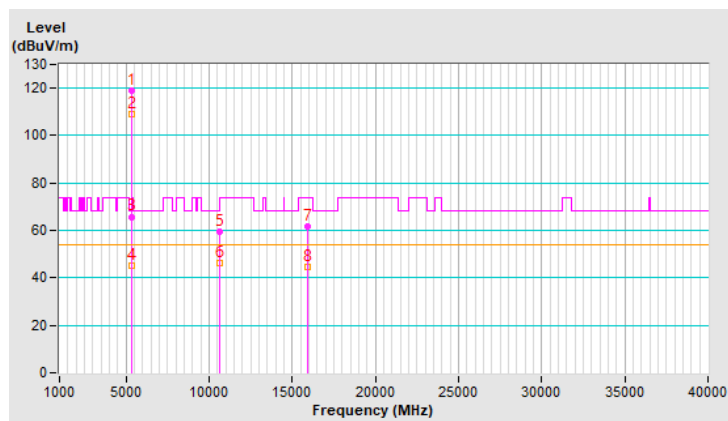


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.6 PK	74.0	-12.4	1.47 H	163	59.4	2.2
2	5460.00	42.1 AV	54.0	-11.9	1.47 H	163	39.9	2.2
3	#5467.00	66.7 PK	68.2	-1.5	1.47 H	163	64.5	2.2
4	*5500.00	120.7 PK			1.47 H	163	118.6	2.1
5	*5500.00	110.2 AV			1.47 H	163	108.1	2.1
6	11000.00	55.9 PK	74.0	-18.1	1.14 H	290	43.8	12.1
7	11000.00	46.0 AV	54.0	-8.0	1.14 H	290	33.9	12.1
8	#16500.00	63.2 PK	68.2	-5.0	3.50 H	269	49.8	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

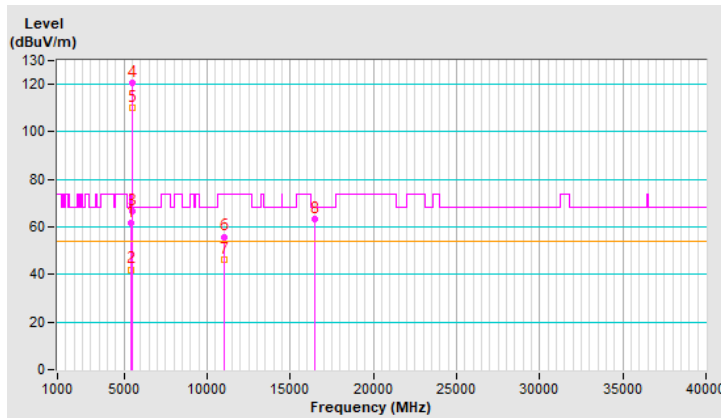


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.6 PK	74.0	-17.4	1.07 V	130	54.4	2.2
2	5460.00	41.3 AV	54.0	-12.7	1.07 V	130	39.1	2.2
3	#5467.60	59.3 PK	68.2	-8.9	1.07 V	130	57.1	2.2
4	*5500.00	117.8 PK			1.07 V	130	115.7	2.1
5	*5500.00	106.3 AV			1.07 V	130	104.2	2.1
6	11000.00	59.7 PK	74.0	-14.3	3.30 V	276	47.6	12.1
7	11000.00	46.8 AV	54.0	-7.2	3.30 V	276	34.7	12.1
8	#16500.00	61.2 PK	68.2	-7.0	2.34 V	321	47.8	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

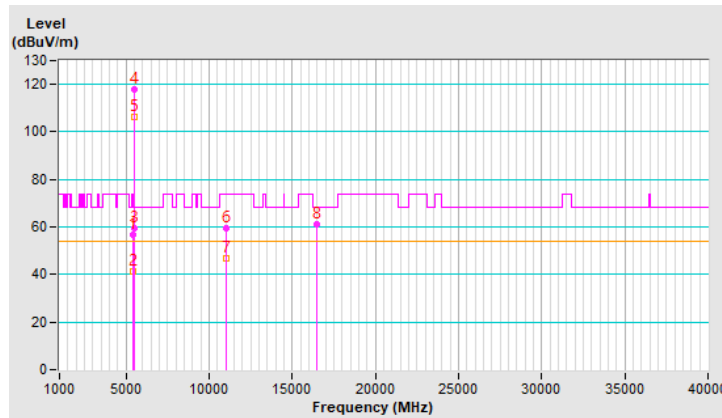


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5580.00	120.8 PK			1.06 H	165	118.6	2.2
2	*5580.00	110.3 AV			1.06 H	165	108.1	2.2
3	11160.00	55.4 PK	74.0	-18.6	1.18 H	292	43.5	11.9
4	11160.00	45.7 AV	54.0	-8.3	1.18 H	292	33.8	11.9
5	#16740.00	63.6 PK	68.2	-4.6	3.40 H	272	48.4	15.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

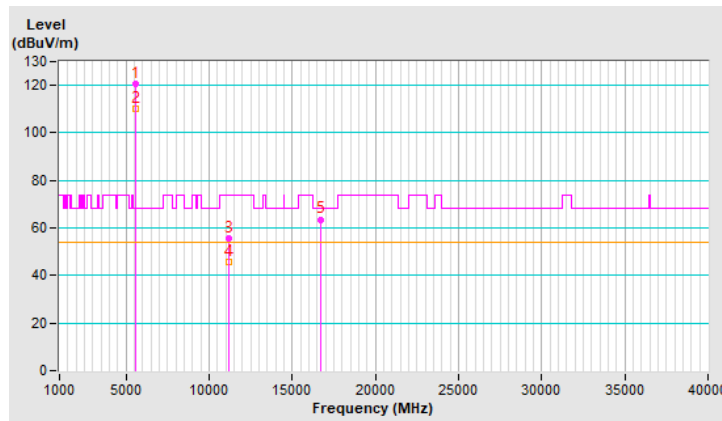


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*5580.00	118.8 PK			1.14 V	102	116.6	2.2
2	*5580.00	109.1 AV			1.14 V	102	106.9	2.2
3	11160.00	60.4 PK	74.0	-13.6	3.32 V	285	48.5	11.9
4	11160.00	47.6 AV	54.0	-6.4	3.32 V	285	35.7	11.9
5	#16740.00	60.7 PK	68.2	-7.5	2.36 V	348	45.5	15.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

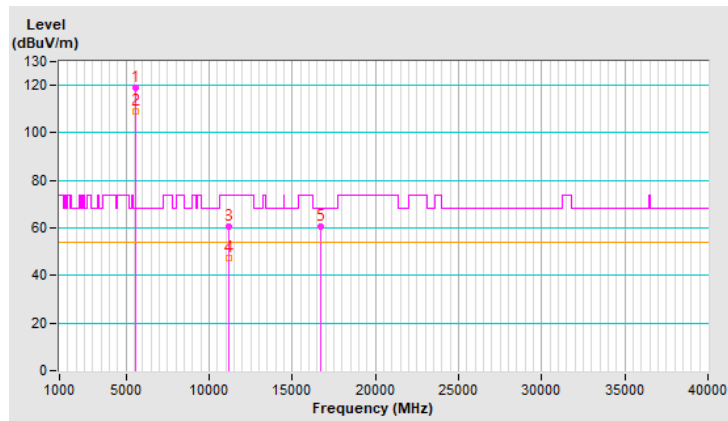


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	120.0 PK			1.45 H	155	117.7	2.3
2	*5700.00	109.4 AV			1.45 H	155	107.1	2.3
3	#5725.00	66.4 PK	68.2	-1.8	1.45 H	155	63.9	2.5
4	11400.00	55.6 PK	74.0	-18.4	1.14 H	292	43.4	12.2
5	11400.00	45.5 AV	54.0	-8.5	1.14 H	292	33.3	12.2
6	#17100.00	64.0 PK	68.2	-4.2	3.48 H	281	47.4	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

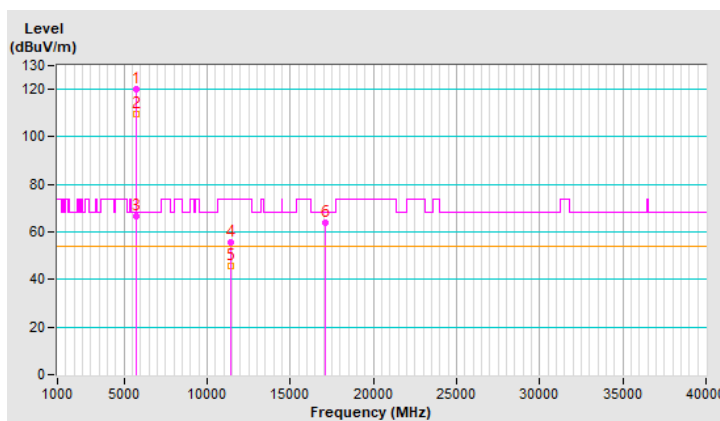




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	117.1 PK			1.11 V	105	114.8	2.3
2	*5700.00	106.1 AV			1.11 V	105	103.8	2.3
3	#5725.00	62.1 PK	68.2	-6.1	1.11 V	105	59.6	2.5
4	11400.00	59.8 PK	74.0	-14.2	3.32 V	291	47.6	12.2
5	11400.00	47.1 AV	54.0	-6.9	3.32 V	291	34.9	12.2
6	#17100.00	61.1 PK	68.2	-7.1	2.38 V	348	44.5	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

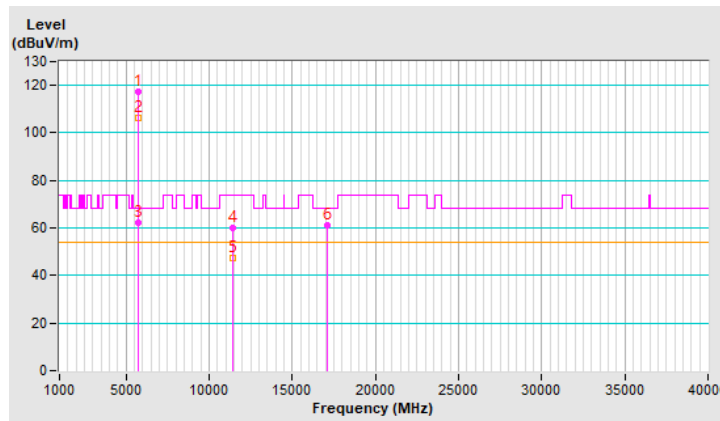




RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.7 PK	74.0	-23.3	1.09 H	171	48.5	2.2
2	5460.00	39.1 AV	54.0	-14.9	1.09 H	171	36.9	2.2
3	#5470.00	52.5 PK	68.2	-15.7	1.09 H	171	50.3	2.2
4	*5720.00	121.2 PK			1.09 H	171	118.8	2.4
5	*5720.00	110.3 AV			1.09 H	171	107.9	2.4
6	#5850.00	52.7 PK	68.2	-15.5	1.09 H	171	49.8	2.9
7	11440.00	56.0 PK	74.0	-18.0	1.18 H	315	43.8	12.2
8	11440.00	46.0 AV	54.0	-8.0	1.18 H	315	33.8	12.2
9	#17160.00	64.2 PK	68.2	-4.0	3.50 H	294	47.7	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

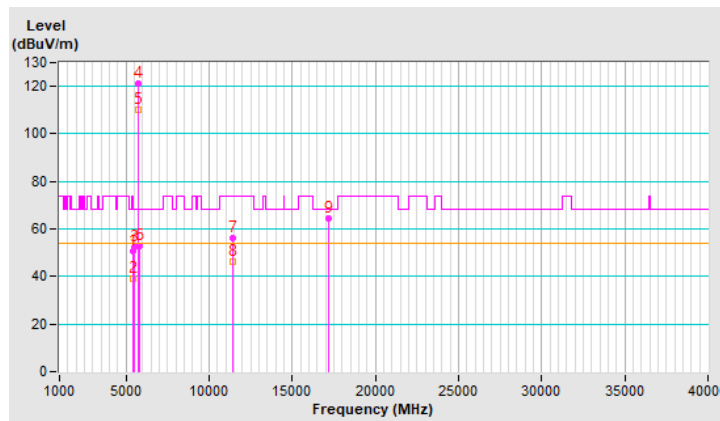


RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.6 PK	74.0	-23.4	1.15 V	96	48.4	2.2
2	5460.00	38.9 AV	54.0	-15.1	1.15 V	96	36.7	2.2
3	#5470.00	52.3 PK	68.2	-15.9	1.15 V	96	50.1	2.2
4	*5720.00	118.7 PK			1.15 V	96	116.3	2.4
5	*5720.00	109.0 AV			1.15 V	96	106.6	2.4
6	#5850.00	52.1 PK	68.2	-16.1	1.15 V	96	49.2	2.9
7	11440.00	60.3 PK	74.0	-13.7	3.34 V	294	48.1	12.2
8	11440.00	47.4 AV	54.0	-6.6	3.34 V	294	35.2	12.2
9	#17160.00	60.6 PK	68.2	-7.6	2.39 V	333	44.1	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

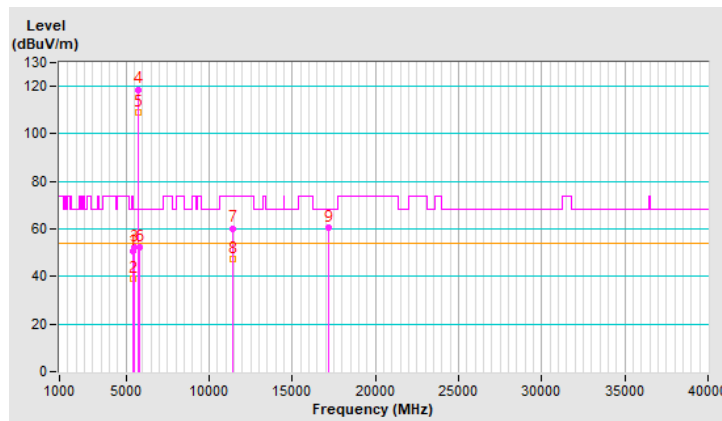

RF Mode	TX 20 MHz Preamble 802.11ax (RU52)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5597.26	51.1 PK	68.2	-17.1	1.53 H	310	48.9	2.2
2	*5745.00	121.5 PK			1.53 H	310	119.0	2.5
3	*5745.00	111.8 AV			1.53 H	310	109.3	2.5
4	#5944.20	50.8 PK	68.2	-17.4	1.53 H	310	47.9	2.9
5	11490.00	55.3 PK	74.0	-18.7	1.15 H	316	42.9	12.4
6	11490.00	45.5 AV	54.0	-8.5	1.15 H	316	33.1	12.4
7	#17235.00	64.3 PK	68.2	-3.9	3.43 H	290	47.6	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

