


# TEST REPORT

**Applicant:** Realtek Semiconductor Corp.  
**Address:** No. 2, Innovation Road II, Hsinchu Science Park,  
Hsinchu 300, Taiwan  
**Equipment Type:** 11ax RTL8852CE Combo module  
**Model Name:** RTL8852CE  
**Brand Name:** N/A  
**FCC ID:** TX2-RTL8852CE  
**Test Standard:** KDB 388624 D02 v18  
**Sample Arrival Date:** Nov. 06, 2023  
**Test Date:** Dec. 09, 2023 - Dec. 13, 2023  
**Date of Issue:** Dec. 27, 2023

**ISSUED BY:**

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Xiong Lining



**Checked by:** Xu Rui



**Approved by:** Tolan Tu  
(Testing Director)



<b>Revision History</b>		
Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Dec. 27, 2023</u>	<u>Initial Issue</u>

## TABLE OF CONTENTS

1	GENERAL INFORMATION .....	3
1.1	Test Laboratory .....	3
1.2	Test Location .....	3
1.3	Test Environment Condition .....	3
2	PRODUCT INFORMATION .....	4
2.1	Applicant Information .....	4
2.2	Manufacturer Information .....	4
2.3	General Description for Equipment under Test (EUT) .....	4
2.4	Ancillary Equipment .....	5
2.5	Technical Information .....	6
2.6	Remarks and Comments .....	7
3	SUMMARY OF TEST RESULT .....	8
3.1	Test Standards .....	8
3.2	Test Results Summary .....	8
4	MEASUREMENT SYSTEM .....	9
4.1	Conducted Power Test Setup .....	9
4.2	G-Sensor Conducted Power Test Procedure .....	9
5	TEST EQUIPMENTS LIST .....	10
ANNEX A CONDUCTED POWER TEST RESULT .....		11
A.1	Trigger lid angle detection and power verification 2.4GHz .....	11
A.2	Trigger lid angle detection and power verification 5GHz .....	15
A.3	Trigger lid angle detection and power verification 6GHz .....	19

# 1 GENERAL INFORMATION

## 1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input checked="" type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	<input type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

## 1.3 Test Environment Condition

Ambient Temperature	18°C to 25°C
Ambient Relative Humidity	30% to 70%

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	Realtek Semiconductor Corp.
Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

### 2.2 Manufacturer Information

Manufacturer	Realtek Semiconductor Corp.
Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

### 2.3 General Description for Equipment under Test (EUT)

EUT Name	11ax RTL8852CE Combo module
Model Name Under Test	RTL8852CE
Series Model Name	N/A
Description of Model Name Differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

#### 2.3.1 Host Information:

Product Name	Notebook Computer
Model Name	IdeaPad 5 2-in-1 16AHP9
Brand Name	Lenovo

### 2.3.2 Antenna Information:

Antenna Port	Model Name	Antenna Manufacturer	Antenna Type	Antenna Gain (dBi)								
				2.4 GHz	5.15 - 5.25 GHz	5.25 - 5.35 GHz	5.47 - 5.725 GHz	5.725 - 5.895 GHz	5.925 - 6.425 GHz	6.425 - 6.525 GHz	6.525 - 6.875 GHz	6.875 - 7.125 GHz
Main Antenna	AYP6Y-100469	AWAN	PIFA	2.26	3.16	3.08	2.43	3.22	2.85	3.88	3.14	2.25
Auxiliary Antenna	AYP6Y-100470		PIFA	2.16	3.41	3.33	2.89	3.82	3.38	3.40	3.40	3.53
Main Antenna	3.N201.0263	South Star	PIFA	1.79	2.31	1.52	2.73	2.61	2.83	2.29	1.82	1.77
Auxiliary Antenna	3.N201.0264		PIFA	1.69	1.87	2.28	2.82	3.18	2.86	3.18	2.21	2.97

## 2.4 Ancillary Equipment

Note: Not applicable.

## 2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40), VHT20/40 and 802.11ax(HE20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80/160) and 802.11ax(HE20/40/80/160), U-NII-1/2A/2C/3/4 6G WIFI 802.11ax(HE20/40/80/160), U-NII-5/6/7/8
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	2.4G WLAN, 5G WLAN, 6G WLAN, Bluetooth	
Frequency Range	802.11b/g	2412 MHz ~ 2472 MHz
	VHT20/VHT40	2412 MHz ~ 2472 MHz
	802.11ax(HE20/HE40)	2412 MHz ~ 2472 MHz
	802.11a	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
		5850 MHz ~ 5895 MHz
	802.11n(HT20/HT40)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
		5850 MHz ~ 5895 MHz
	802.11ac(VHT20/VHT40/VHT80)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
		5850 MHz ~ 5895 MHz
	802.11ax(HE20/HE40/HE80)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
5470 MHz ~ 5725 MHz		
5725 MHz ~ 5850 MHz		
5850 MHz ~ 5895 MHz		
802.11ac(VHT160)/ax(HE160)	5150 MHz ~ 5250 MHz	
	5470 MHz ~ 5725 MHz	
	5850 MHz ~ 5895 MHz	
802.11ax(HE20/HE40/HE80/HE160)	5925 MHz ~ 6425 MHz	
	6425 MHz ~ 6525 MHz	
	6525 MHz ~ 6875 MHz	
	6875 MHz ~ 7125 MHz	
Bluetooth	2402 MHz ~ 2480 MHz	
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna	
Hotspot Function	N/A	

Exposure Category	General Population/Uncontrolled exposure	
Product Type	Portable Device	
EUT Type	<input checked="" type="checkbox"/> Production unit	<input type="checkbox"/> Identical prototype

## 2.6 Remarks and Comments

The test report is validation of the G sensor functionality

### 3 SUMMARY OF TEST RESULT

#### 3.1 Test Standards

No.	Identity	Document Title
1	KDB 388624 D02 v18	Pre-Approval Guidance List v18, PRE-APPROVAL GUIDANCE LIST

#### 3.2 Test Results Summary

Device Mode	Lid Angle range	WLAN 2.4GHz(802.11b Channel 6)				WLAN 5GHz(802.11ac80 Channel 155)				WLAN 6GHz(802.11ax160 Channel 111)			
		Tune-up Power (dBm)		Measured Power(dBm)		Tune-up Power (dBm)		Measured Power(dBm)		Tune-up Power (dBm)		Measured Power(dBm)	
		Main. Antenna	Aux. Antenna	Main. Antenna	Aux. Antenna	Main. Antenna	Aux. Antenna	Main. Antenna	Aux. Antenna	Main. Antenna	Aux. Antenna	Main. Antenna	Aux. Antenna
Laptop	0° - 350°	15.50	16.00	15.40	15.90	16.00	16.00	15.90	15.90	13.00	13.00	12.89	12.90
Tablet	350° - 360°	12.00	12.00	11.90	11.89	11.00	10.00	10.88	9.88	10.50	10.50	10.38	10.34




## 4 MEASUREMENT SYSTEM

### 4.1 Conducted Power Test Setup

The conducted power measurement test setup is described in the following and illustrated in below figure.

1. The DUT is convertible PC from Lenovo model IdeaPad 5 2-in-1 16AHP9 RTL8852CE connectivity module is installed.
2. A control PC is used to configure the call box as an access point to manage the uplink and downlink data traffic.
3. Uplink signal power is measured with the Call Box.
4. Path loss in the power measurement setup from the wireless module antenna port to the Call Box.

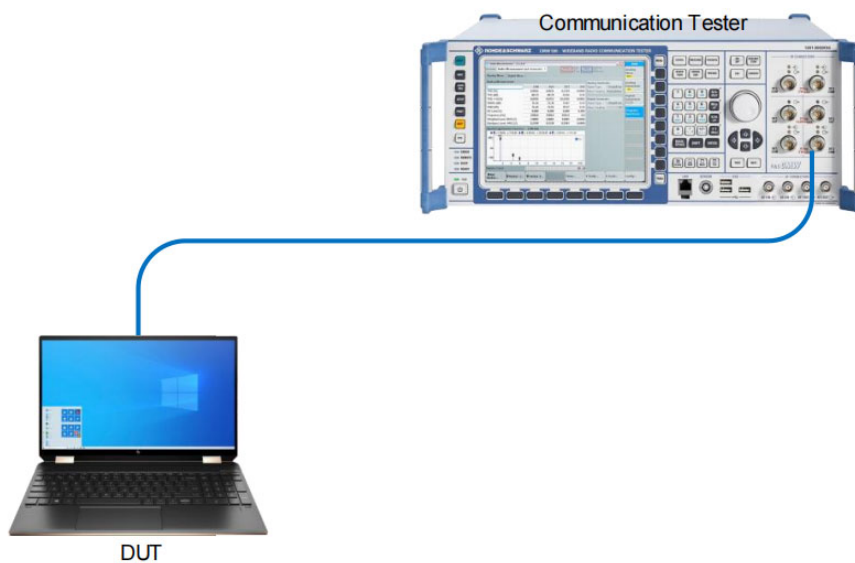

### 4.2 G-Sensor Conducted Power Test Procedure

The following additional guidance applies only to convertible laptops whose screen rotates around one axis, from 0 degrees to 360 degrees, in a clamshell style, i.e., from closed mode to open mode, to “tent” mode, and finally, to tablet mode. This process must be followed to determine the lid angle where a power reduction occurs, by taking power measurements at each step, as indicated in the step listed here below:

1. From the lid in closed mode (0 degrees), open the screen in 10-degree steps until laptop mode is obtained.
2. Lower the screen by 5 degrees increments to verify that the “closed mode” is triggered.
3. From the position of the previous step, open the screen in 1-degree increments until laptop mode is triggered again.
4. Continue opening the screen in 1-degree increments until at least 5 degrees past where “laptop mode” was obtained, then continue opening the screen in 10-degree steps until the device switches to tablet mode.
5. Reverse the previous procedure to go from tablet mode back down to closed mode.

## 5 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Communication Tester	Rohde &Schwartz	CMW500	171150	2023/6/19	2024/6/18
RF Cable	N/A	N/A	N/A	N/A	N/A

Note: RF cable loss was verified before usage.

## ANNEX A CONDUCTED POWER TEST RESULT

### A.1 Trigger lid angle detection and power verification 2.4GHz

#### A.1.1 The lid is rotating from 0° to 360°

Mode	Angele (degrees)	Measured Power	
		2.4GHz 802.11b Ch6	
		(dBm)	
		Main	Aux.
Laptop	0	15.15	15.90
	10	15.07	15.83
	20	15.23	15.90
	30	15.23	15.84
	40	15.13	15.81
	50	15.31	15.77
	60	15.37	15.58
	70	15.36	15.57
	80	15.34	15.89
	90	15.05	15.82
	100	15.37	15.78
	110	15.14	15.56
	120	15.33	15.89
	130	15.13	15.73
	140	15.19	15.56
	150	15.21	15.83
	160	15.07	15.65
	170	15.08	15.82
	180	15.34	15.86
	190	15.36	15.71
	200	15.33	15.73
	210	15.29	15.55
	220	15.13	15.71
	230	15.19	15.79
	240	15.19	15.85
	250	15.10	15.67
	260	15.25	15.69
	270	15.25	15.68
	280	15.12	15.79
	290	15.12	15.78
	300	15.40	15.63
	310	15.20	15.82
320	15.17	15.88	

	330	15.39	15.56
	340	15.35	15.56
Tablet	350	11.87	11.62
Laptop	345	15.07	15.81
	346	15.37	15.65
	347	15.10	15.59
	348	15.15	15.63
	349	15.08	15.64
Tablet	350	11.70	11.75
	351	11.80	11.63
	352	11.55	11.56
	353	11.57	11.77
	354	11.78	11.89
	355	11.90	11.84
	360	11.85	11.68

A.1.2 The lid is rotating from 360° to 0°

Mode	Angele (degrees)	Measured Power	
		2.4GHz 802.11b Ch6	
		(dBm)	
		Main	Aux.
Tablet	360	11.60	11.60
	350	11.58	11.70
Laptop	340	15.20	15.82
	345	15.35	15.80
Tablet	350	11.81	11.86
Laptop	349	15.07	15.89
	348	15.28	15.72
	347	15.25	15.55
	346	15.09	15.68
	345	15.26	15.83
	340	15.27	15.69
	330	15.25	15.60
	320	15.23	15.75
	310	15.05	15.57
	300	15.09	15.62
	290	15.16	15.61
	280	15.38	15.62
	270	15.38	15.64
	260	15.11	15.78
	250	15.11	15.74
	240	15.27	15.63
	230	15.28	15.78
	220	15.31	15.60
	210	15.35	15.84
	200	15.38	15.88
	190	15.33	15.88
	180	15.36	15.77
	170	15.05	15.90
	160	15.20	15.55
150	15.35	15.78	
140	15.12	15.69	
130	15.13	15.83	
120	15.10	15.75	
110	15.25	15.73	
100	15.29	15.67	
90	15.22	15.71	
80	15.05	15.60	

	70	15.08	15.60
	60	15.23	15.69
	50	15.23	15.90
	40	15.19	15.77
	30	15.25	15.61
	20	15.09	15.90
	10	15.14	15.73
	0	15.21	15.79

## A.2 Trigger lid angle detection and power verification 5GHz

### A.2.1 The lid is rotating from 0° to 360°

Mode	Angele (degrees)	Measured Power	
		5GHz 802.11ac80 Ch155	
		(dBm)	
		Main	Aux.
Laptop	0	15.65	15.70
	10	15.65	15.58
	20	15.81	15.55
	30	15.65	15.76
	40	15.81	15.71
	50	15.70	15.82
	60	15.61	15.57
	70	15.76	15.63
	80	15.84	15.82
	90	15.55	15.84
	100	15.69	15.88
	110	15.68	15.69
	120	15.75	15.57
	130	15.58	15.63
	140	15.61	15.61
	150	15.56	15.84
	160	15.85	15.67
	170	15.64	15.66
	180	15.70	15.79
	190	15.69	15.80
	200	15.69	15.62
	210	15.60	15.86
	220	15.55	15.57
	230	15.62	15.58
	240	15.73	15.57
	250	15.71	15.73
	260	15.58	15.90
	270	15.77	15.64
	280	15.77	15.56
	290	15.86	15.78
	300	15.61	15.86
	310	15.78	15.64
	320	15.61	15.57
	330	15.88	15.79
340	15.83	15.82	

Tablet	350	10.77	9.83
Laptop	345	15.55	15.69
	346	15.57	15.56
	347	15.56	15.82
	348	15.63	15.76
	349	15.65	15.85
Tablet	350	10.72	9.80
	351	10.71	9.88
	352	10.69	9.57
	353	10.69	9.77
	354	10.86	9.75
	355	10.88	9.58
	360	10.62	9.85



A.2.2 The lid is rotating from 360° to 0°

Mode	Angele (degrees)	Measured Power	
		5GHz 802.11ac80 Ch155	
		(dBm)	
		Main	Aux.
Tablet	360	10.87	9.60
	350	10.87	9.58
Laptop	340	15.89	15.76
	345	15.72	15.89
Tablet	350	10.62	9.59
Laptop	349	15.72	15.68
	348	15.84	15.82
	347	15.56	15.86
	346	15.64	15.62
	345	15.57	15.84
	340	15.86	15.58
	330	15.80	15.72
	320	15.58	15.73
	310	15.83	15.62
	300	15.76	15.75
	290	15.61	15.74
	280	15.67	15.65
	270	15.86	15.61
	260	15.70	15.82
	250	15.58	15.82
	240	15.84	15.68
	230	15.65	15.69
	220	15.87	15.73
	210	15.55	15.64
	200	15.62	15.59
	190	15.67	15.80
	180	15.68	15.69
	170	15.70	15.78
	160	15.71	15.90
150	15.86	15.69	
140	15.75	15.61	
130	15.59	15.76	
120	15.65	15.85	
110	15.90	15.82	
100	15.77	15.60	
90	15.73	15.86	
80	15.70	15.73	

	70	15.88	15.55
	60	15.79	15.86
	50	15.86	15.90
	40	15.74	15.79
	30	15.67	15.55
	20	15.66	15.90
	10	15.78	15.73
	0	15.57	15.63

### A.3 Trigger lid angle detection and power verification 6GHz

#### A.3.1 The lid is rotating from 0° to 360°

Mode	Angele (degrees)	Measured Power	
		6GHz 802.11ax160 Ch111	
		(dBm)	
		Main	Aux.
Laptop	0	12.79	12.59
	10	12.68	12.67
	20	12.70	12.63
	30	12.58	12.65
	40	12.75	12.69
	50	12.64	12.69
	60	12.83	12.66
	70	12.63	12.63
	80	12.71	12.90
	90	12.82	12.71
	100	12.75	12.59
	110	12.77	12.84
	120	12.66	12.84
	130	12.60	12.80
	140	12.60	12.58
	150	12.65	12.88
	160	12.63	12.71
	170	12.81	12.81
	180	12.82	12.83
	190	12.76	12.63
	200	12.71	12.77
	210	12.75	12.88
	220	12.71	12.80
	230	12.69	12.56
	240	12.72	12.69
	250	12.55	12.62
	260	12.82	12.70
	270	12.64	12.84
	280	12.80	12.65
	290	12.63	12.83
	300	12.67	12.87
	310	12.87	12.76
	320	12.55	12.81
	330	12.86	12.61
340	12.74	12.58	

Tablet	350	10.28	10.09
Laptop	345	12.84	12.80
	346	12.65	12.74
	347	12.71	12.57
	348	12.63	12.68
	349	12.82	12.88
Tablet	350	10.16	10.16
	351	10.12	10.15
	352	10.20	10.21
	353	10.31	10.30
	354	10.13	10.16
	355	10.31	10.14
	360	10.38	10.18

A.3.2 The lid is rotating from 360° to 0°

Mode	Angele (degrees)	Measured Power	
		6GHz 802.11ax160 Ch111	
		(dBm)	
		Main	Aux.
Tablet	360	10.05	10.28
	350	10.35	10.34
Laptop	340	12.88	12.77
	345	12.73	12.86
Tablet	350	10.23	10.13
Laptop	349	12.65	12.87
	348	12.57	12.82
	347	12.84	12.73
	346	12.85	12.62
	345	12.73	12.71
	340	12.83	12.67
	330	12.84	12.64
	320	12.67	12.60
	310	12.82	12.61
	300	12.57	12.85
	290	12.68	12.71
	280	12.56	12.65
	270	12.73	12.73
	260	12.75	12.66
	250	12.82	12.57
	240	12.89	12.84
	230	12.63	12.82
	220	12.75	12.65
	210	12.65	12.77
	200	12.75	12.78
	190	12.67	12.80
	180	12.71	12.55
	170	12.59	12.77
	160	12.77	12.90
150	12.76	12.75	
140	12.71	12.73	
130	12.58	12.82	
120	12.86	12.87	
110	12.61	12.79	
100	12.88	12.70	
90	12.63	12.74	
80	12.76	12.65	

	70	12.87	12.68
	60	12.61	12.76
	50	12.82	12.72
	40	12.81	12.79
	30	12.79	12.75
	20	12.58	12.63
	10	12.89	12.83
	0	12.74	12.55

## Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--