





### 802.11be (EHT160)


### Spectrum Plot

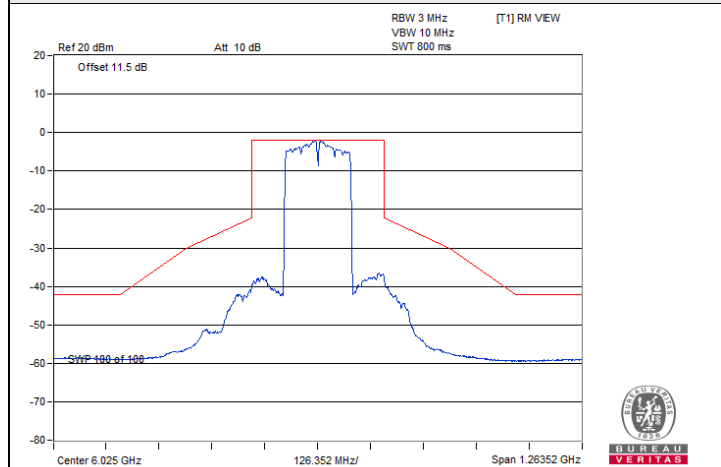


802.11be (EHT160) / Chain 0 : CH 15

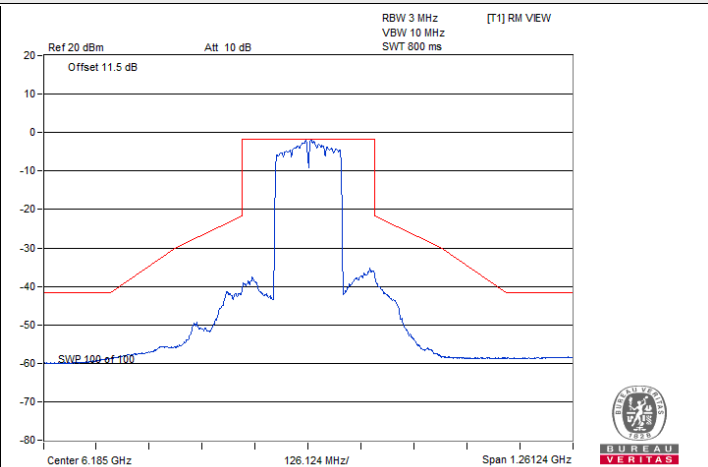


802.11be (EHT160) / Chain 0 : CH 47

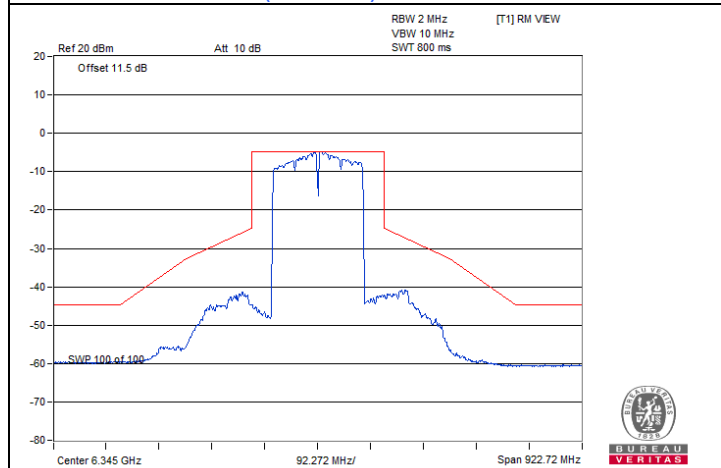


802.11be (EHT160) / Chain 0 : CH 79

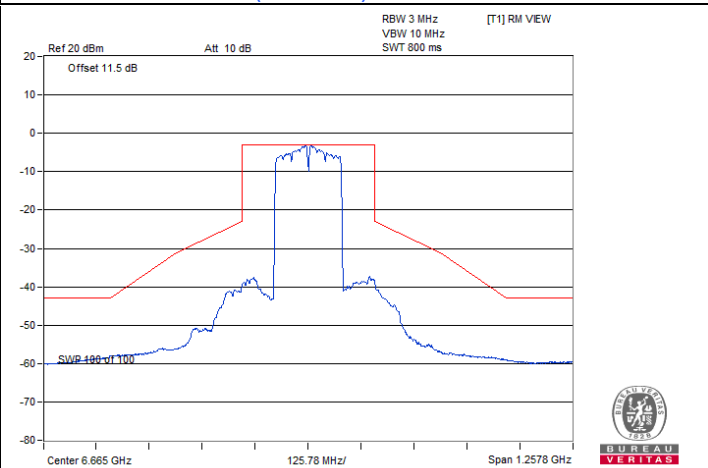

802.11be (EHT160) / Chain 0 : CH 143


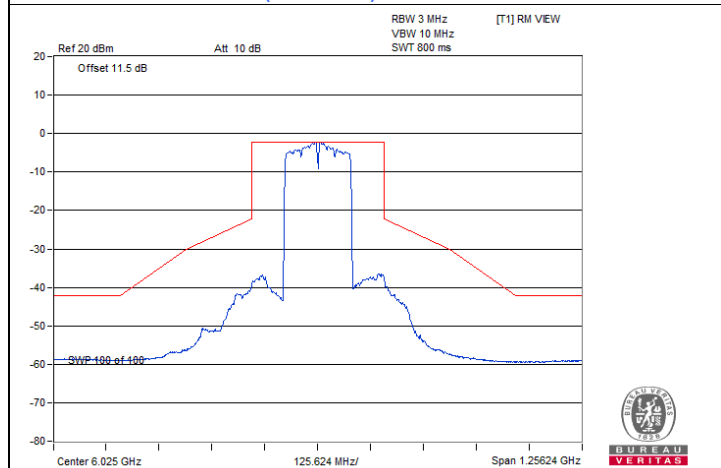


802.11be (EHT160) / Chain 1 : CH 15

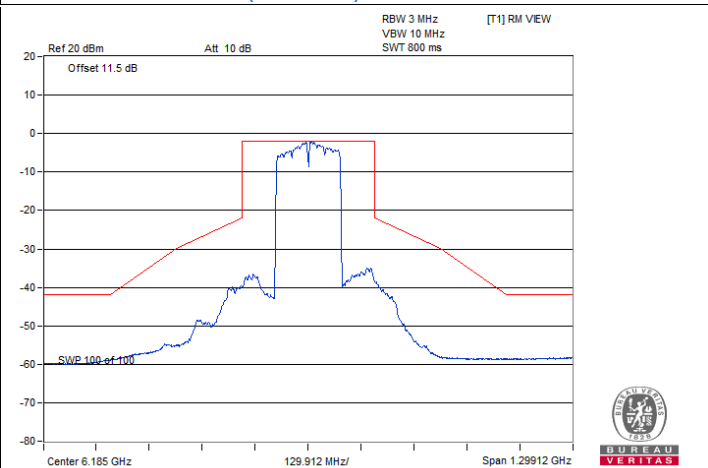


802.11be (EHT160) / Chain 1 : CH 47







### Spectrum Plot

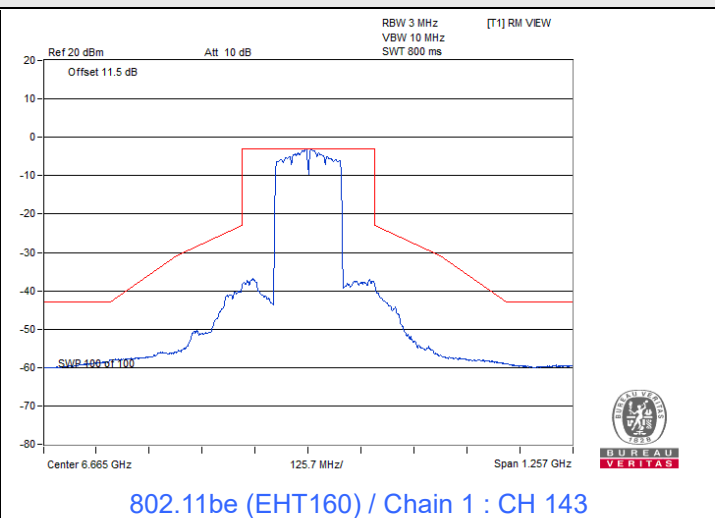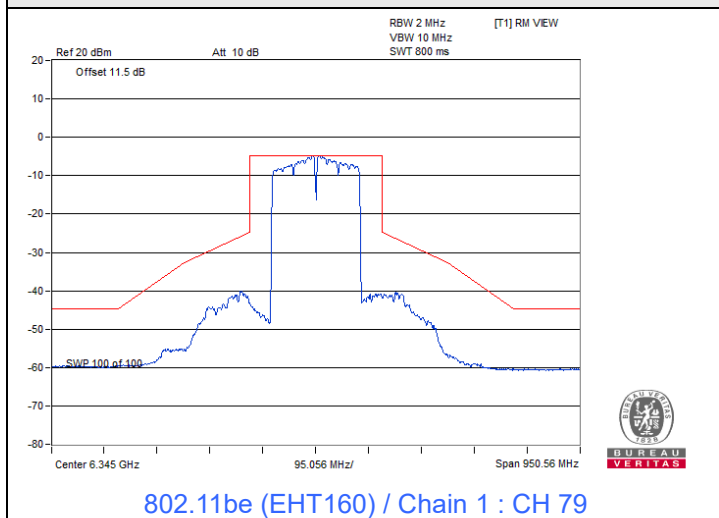

802.11be (EHT20) 26-tone RU

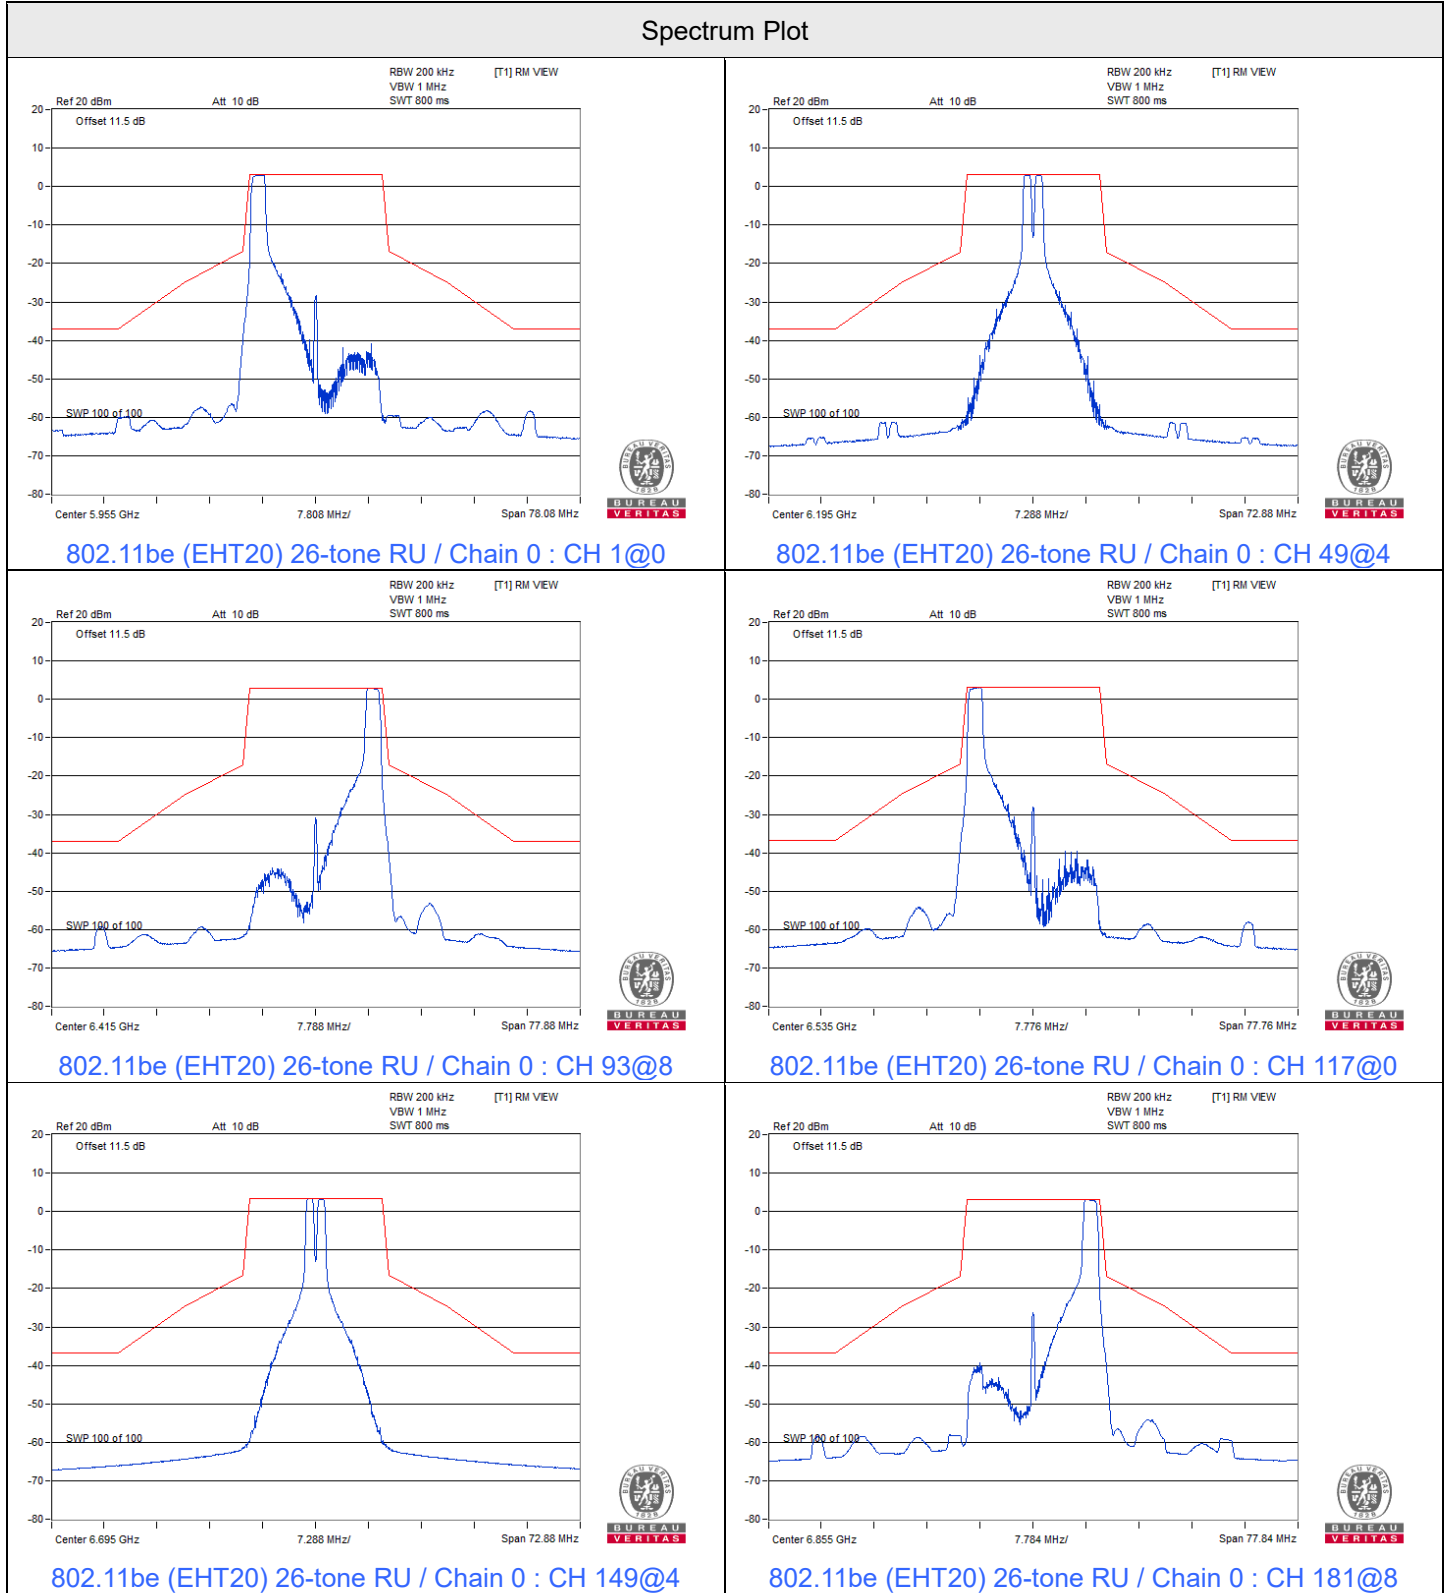


### Spectrum Plot

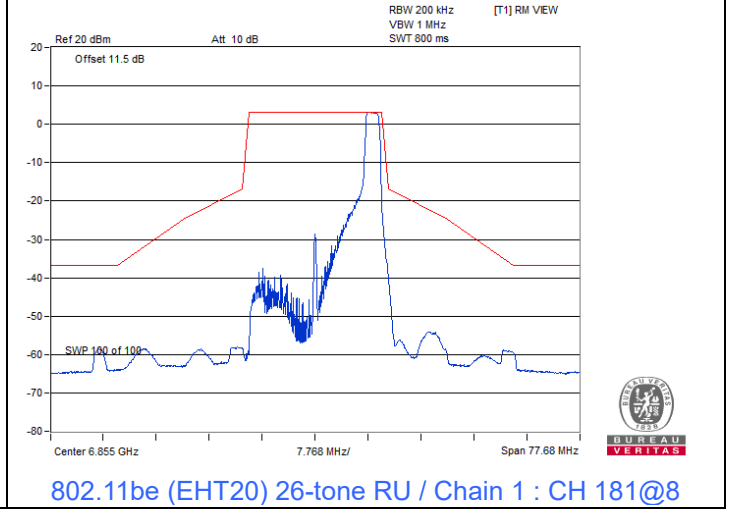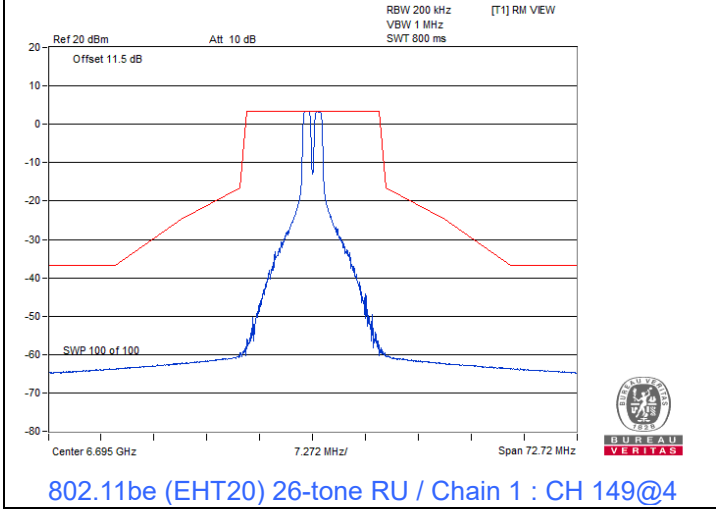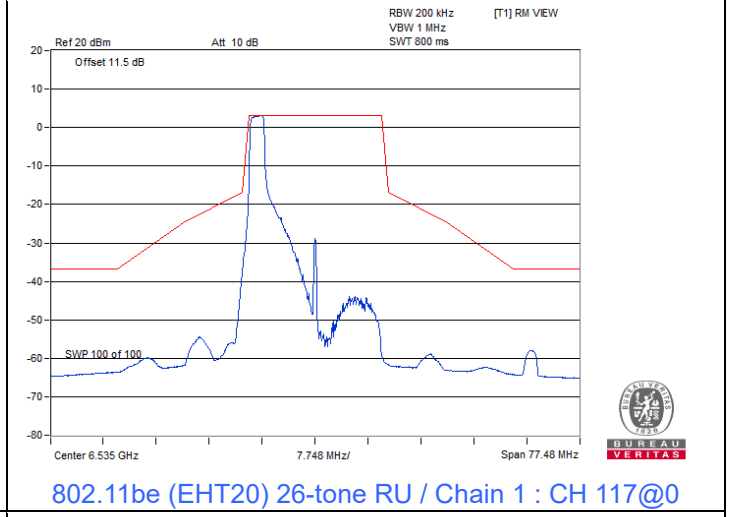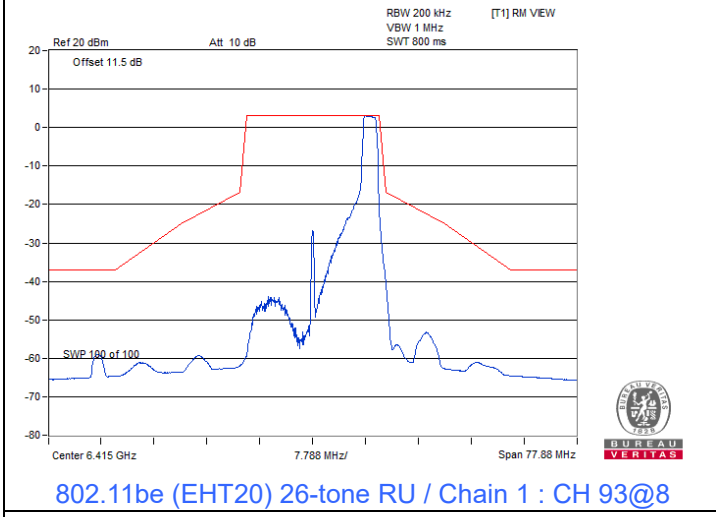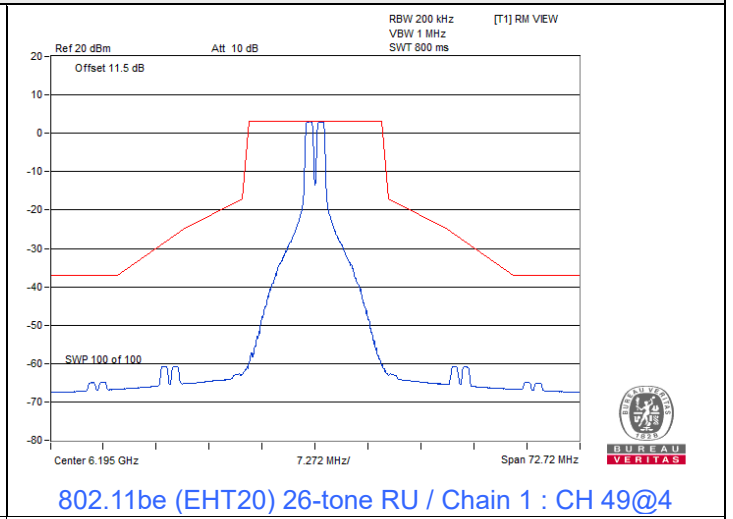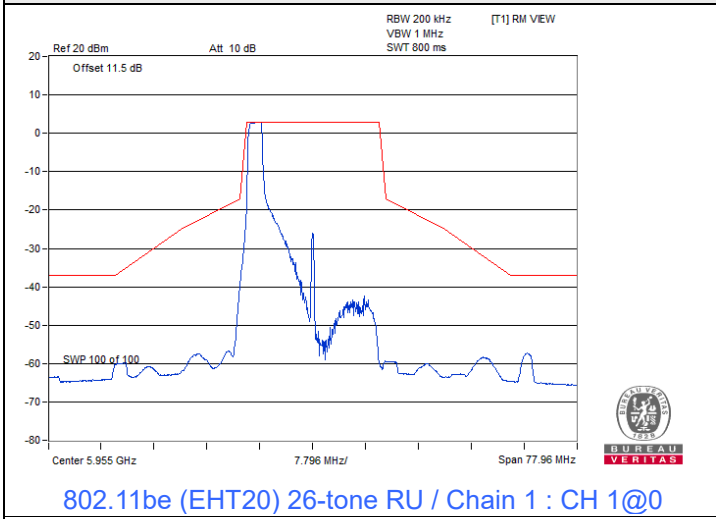




### 802.11be (EHT20) 52-tone RU


#### Spectrum Plot

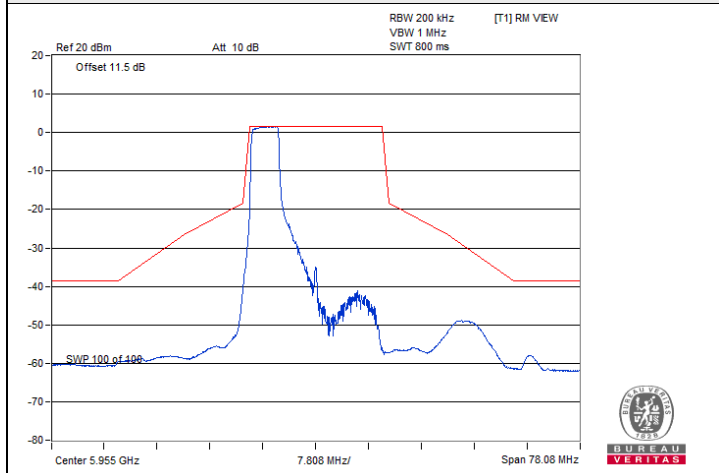


802.11be (EHT20) 52-tone RU / Chain 0 : CH 1@37

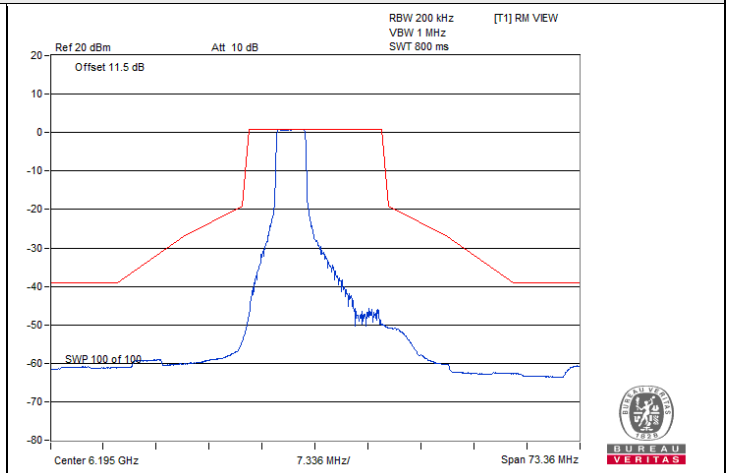


802.11be (EHT20) 52-tone RU / Chain 0 : CH 49@38

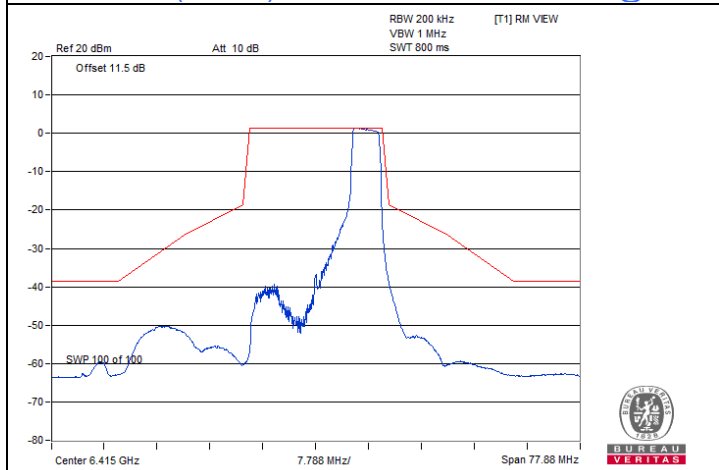


802.11be (EHT20) 52-tone RU / Chain 0 : CH 93@40

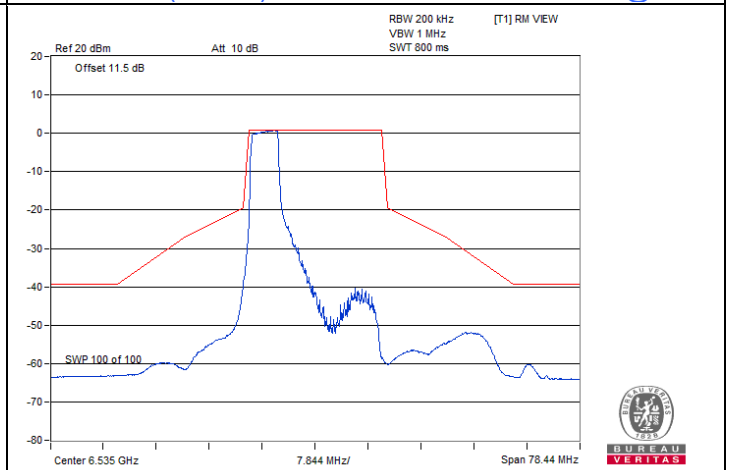

802.11be (EHT20) 52-tone RU / Chain 0 : CH 117@37

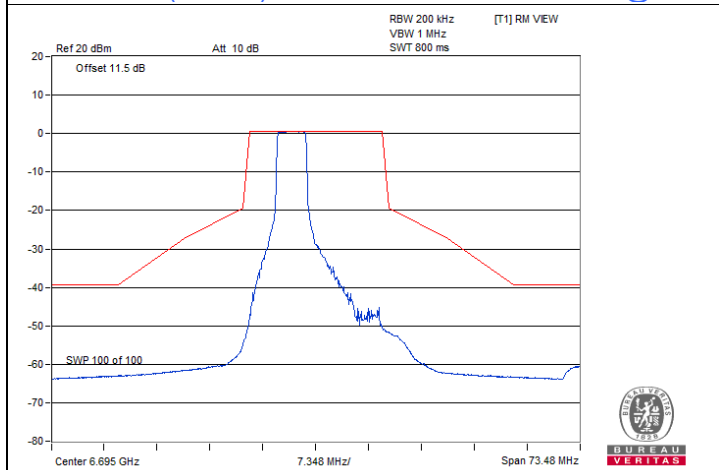


802.11be (EHT20) 52-tone RU / Chain 0 : CH 149@38

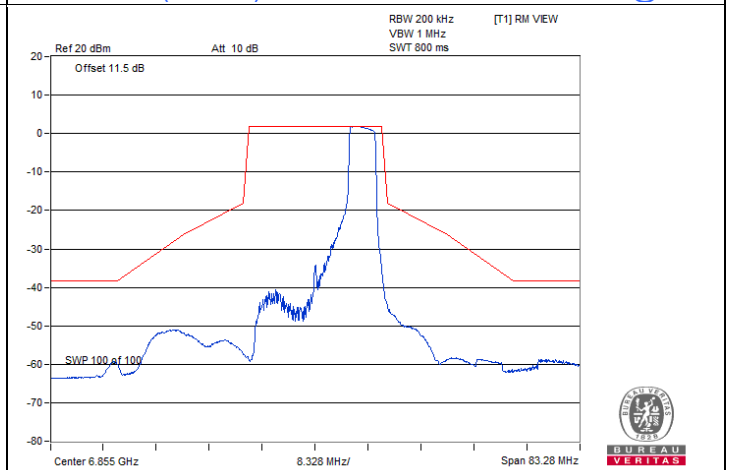


802.11be (EHT20) 52-tone RU / Chain 0 : CH 181@40


### Spectrum Plot

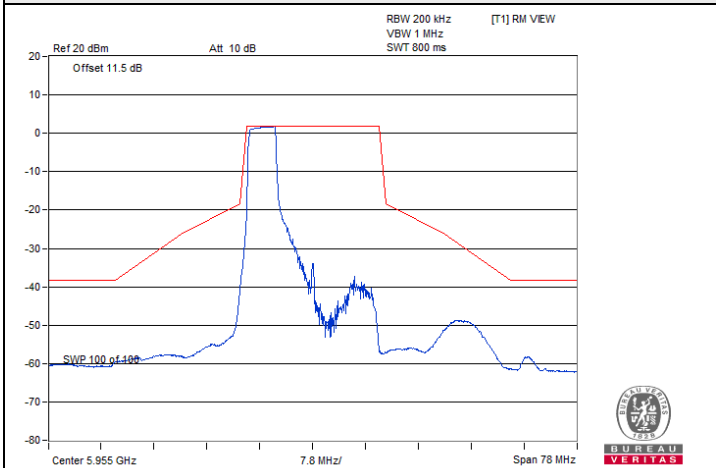


802.11be (EHT20) 52-tone RU / Chain 1 : CH 1@37

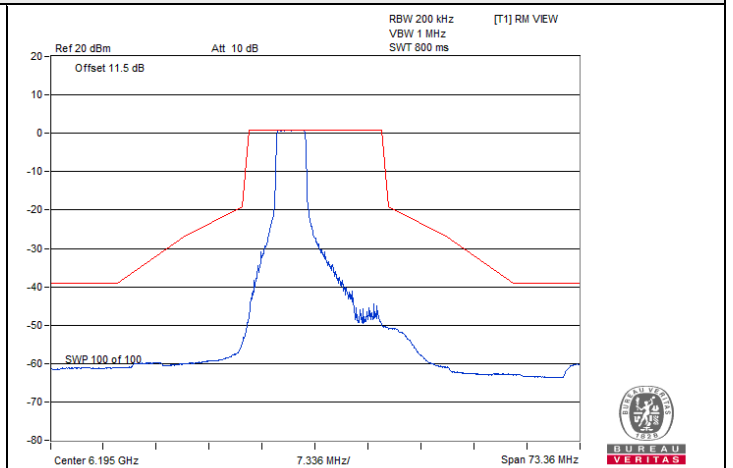


802.11be (EHT20) 52-tone RU / Chain 1 : CH 49@38

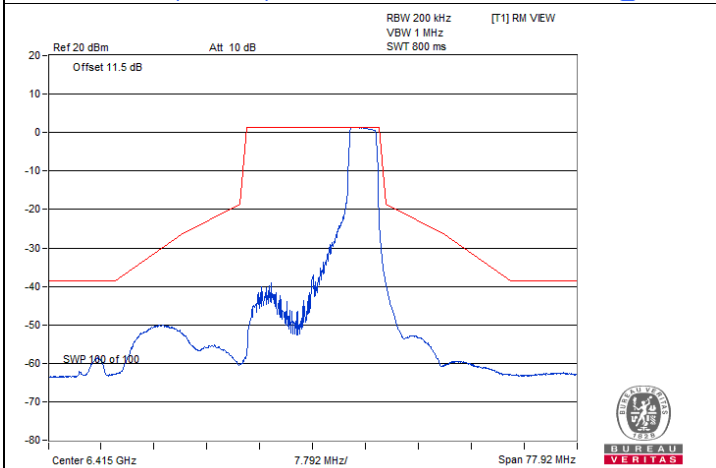


802.11be (EHT20) 52-tone RU / Chain 1 : CH 93@40

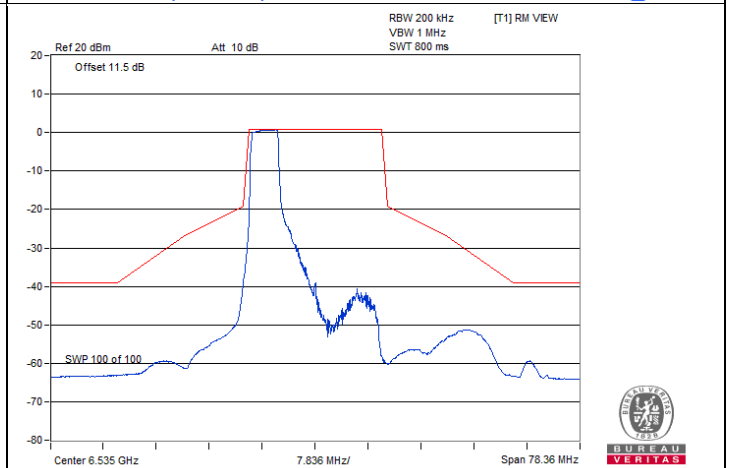

802.11be (EHT20) 52-tone RU / Chain 1 : CH 117@37

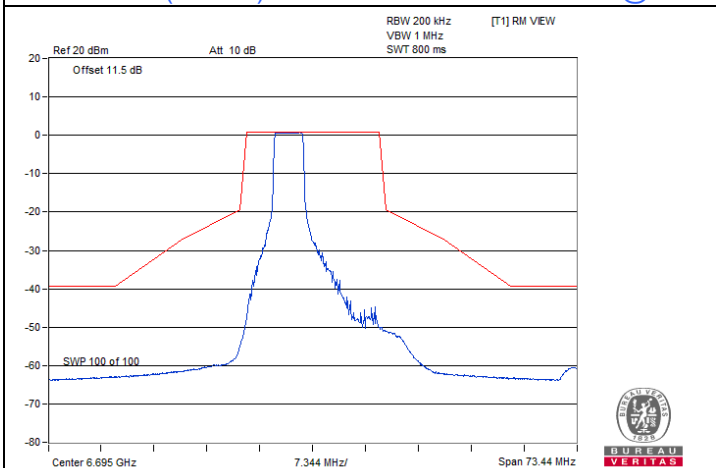

802.11be (EHT20) 52-tone RU / Chain 1 : CH 149@38

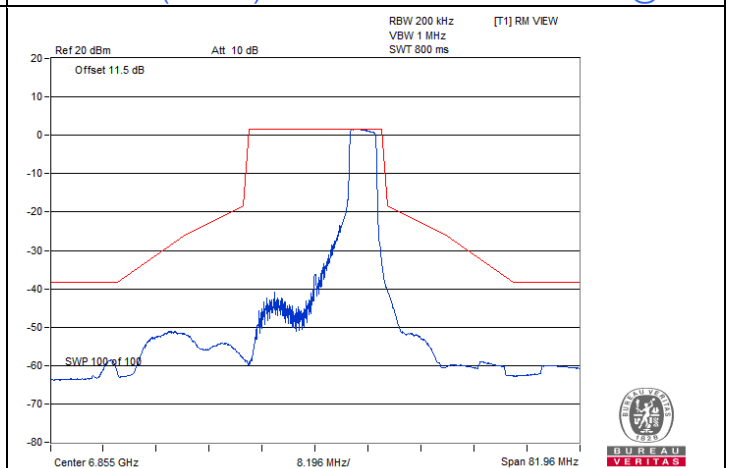


802.11be (EHT20) 52-tone RU / Chain 1 : CH 181@40




### 802.11be (EHT20) 106-tone RU


#### Spectrum Plot

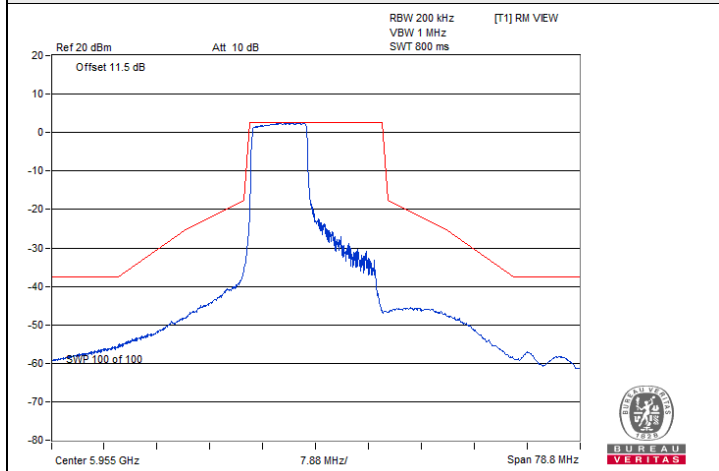


802.11be (EHT20) 106-tone RU / Chain 0 : CH 1@53

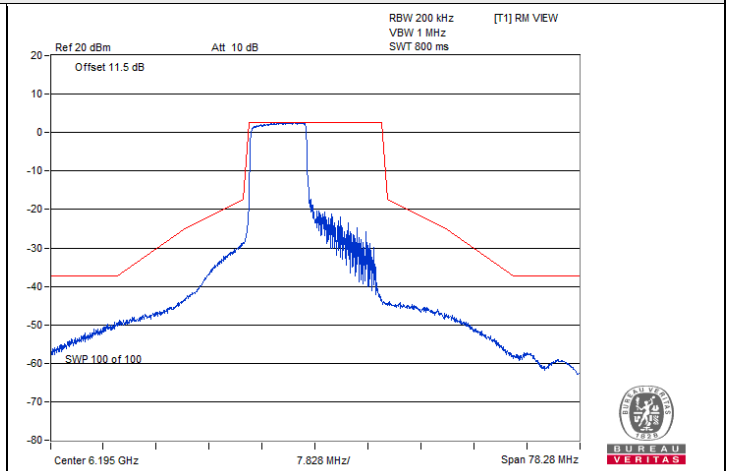


802.11be (EHT20) 106-tone RU / Chain 0 : CH 49@53

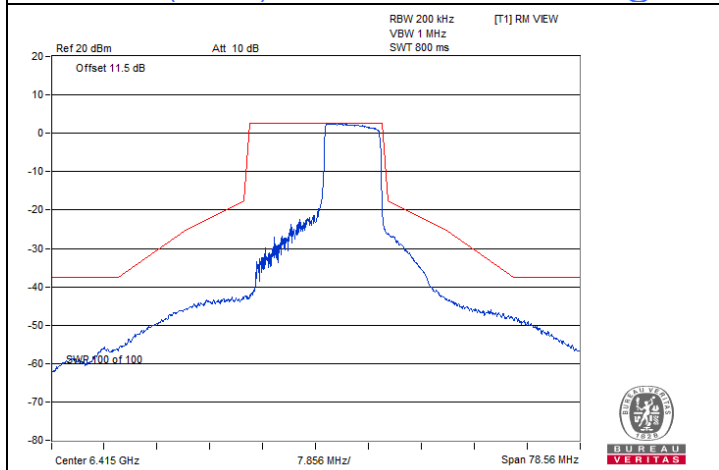


802.11be (EHT20) 106-tone RU / Chain 0 : CH 93@54

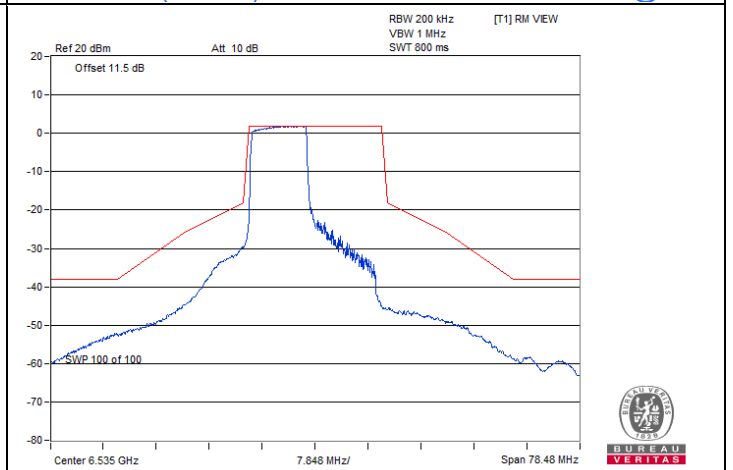

802.11be (EHT20) 106-tone RU / Chain 0 : CH 117@53

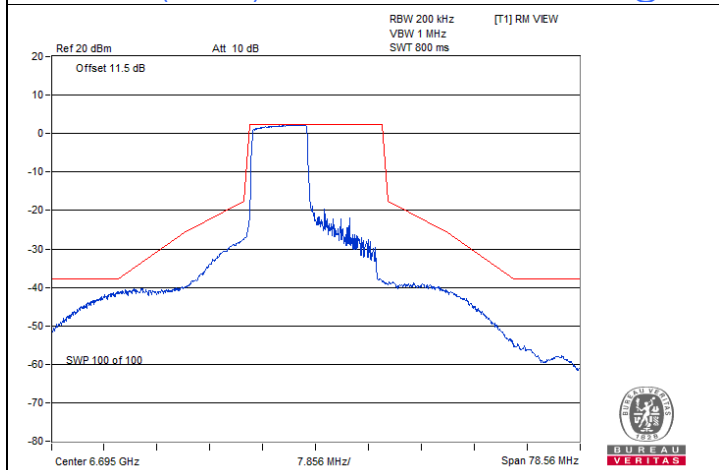


802.11be (EHT20) 106-tone RU / Chain 0 : CH 149@53

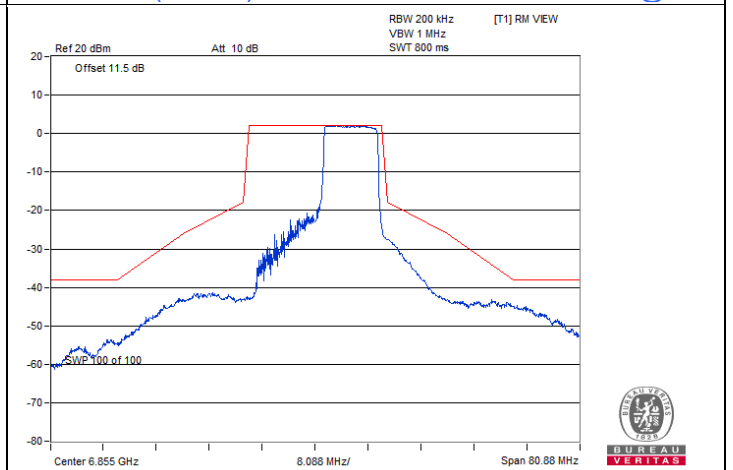


802.11be (EHT20) 106-tone RU / Chain 0 : CH 181@54


### Spectrum Plot

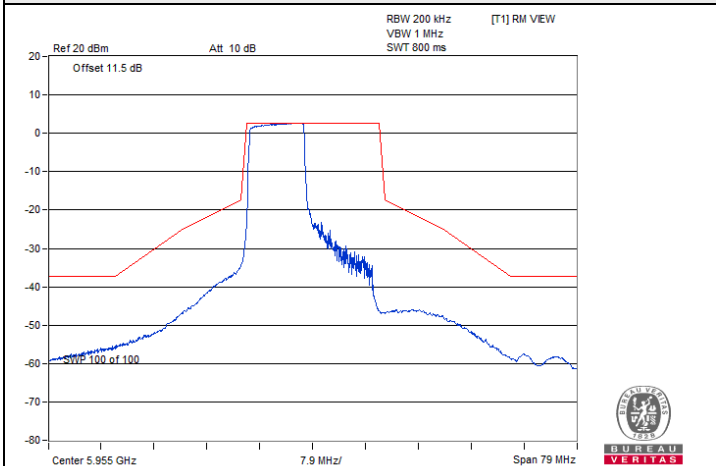


802.11be (EHT20) 106-tone RU / Chain 1 : CH 1@53

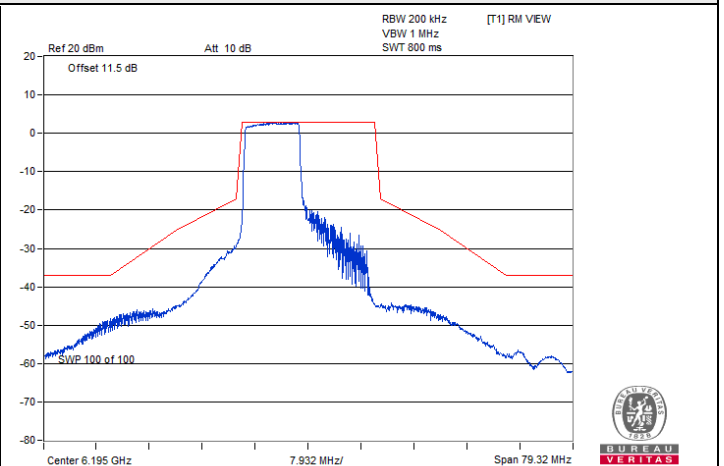


802.11be (EHT20) 106-tone RU / Chain 1 : CH 49@53

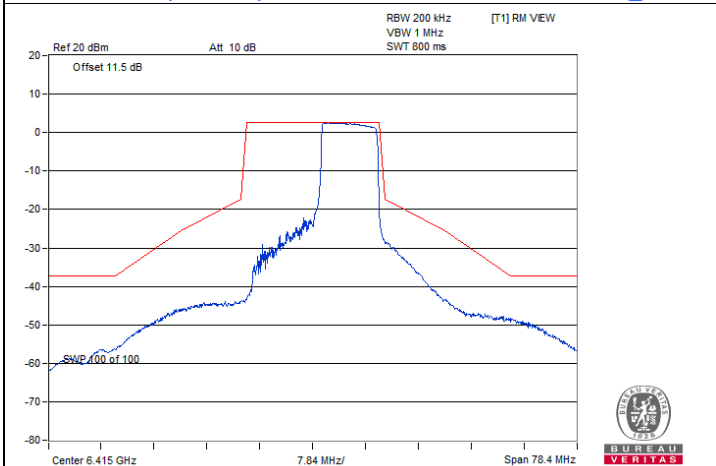


802.11be (EHT20) 106-tone RU / Chain 1 : CH 93@54

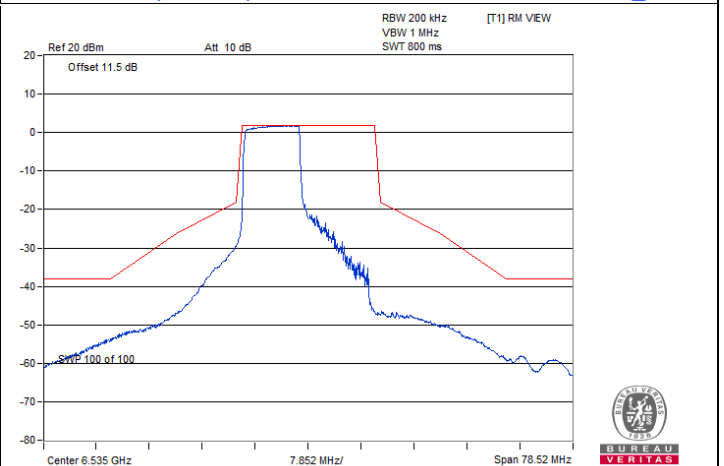

802.11be (EHT20) 106-tone RU / Chain 1 : CH 117@53

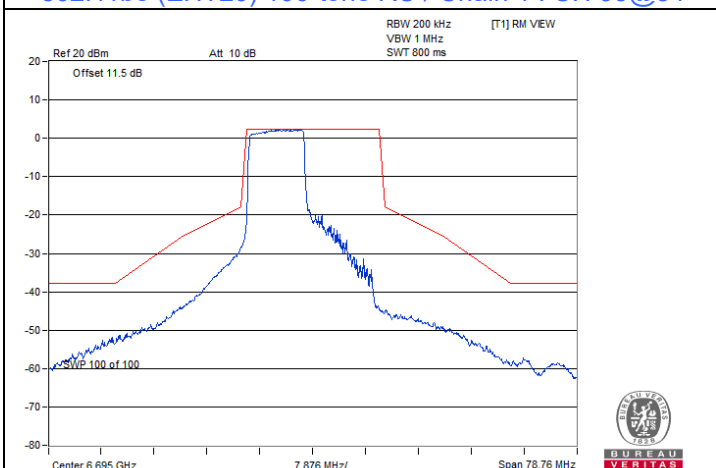

802.11be (EHT20) 106-tone RU / Chain 1 : CH 149@53

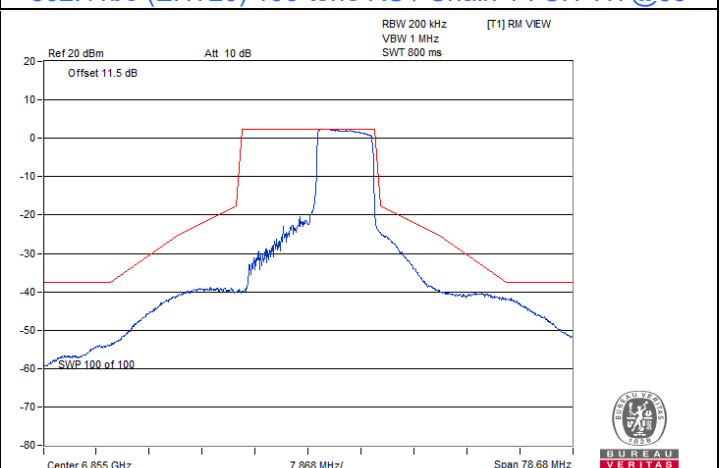

802.11be (EHT20) 106-tone RU / Chain 1 : CH 181@54



## 7.5 Occupied Bandwidth

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Ivan Tseng
--------------	---------	---------------------------	--------------	------------	------------

under control of low power indoor AP

1TX

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	16.44	320	Pass
49	6195	16.44	320	Pass
93	6415	16.44	320	Pass
97	6435	16.44	320	Pass
105	6475	16.44	320	Pass
113	6515	16.44	320	Pass
117	6535	16.44	320	Pass
149	6695	16.44	320	Pass
181	6855	16.44	320	Pass
185	6875	16.44	320	Pass
209	6995	16.44	320	Pass
233	7115	16.44	320	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	18.96	320	Pass
49	6195	18.84	320	Pass
93	6415	18.84	320	Pass
97	6435	18.84	320	Pass
105	6475	18.96	320	Pass
113	6515	18.96	320	Pass
117	6535	18.96	320	Pass
149	6695	18.96	320	Pass
181	6855	18.96	320	Pass
185	6875	18.84	320	Pass
209	6995	18.96	320	Pass
233	7115	18.84	320	Pass

**802.11be (EHT40)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
3	5965	38.16	320	Pass
51	6205	37.92	320	Pass
91	6405	37.92	320	Pass
99	6445	38.16	320	Pass
107	6485	38.16	320	Pass
115	6525	38.16	320	Pass
123	6565	38.16	320	Pass
147	6685	38.16	320	Pass
179	6845	37.92	320	Pass
187	6885	38.16	320	Pass
203	6965	38.16	320	Pass
227	7085	37.92	320	Pass

**802.11be (EHT80)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
7	5985	77.04	320	Pass
55	6225	77.04	320	Pass
87	6385	77.04	320	Pass
103	6465	77.04	320	Pass
119	6545	77.04	320	Pass
135	6625	77.04	320	Pass
151	6705	77.04	320	Pass
167	6785	77.04	320	Pass
183	6865	77.28	320	Pass
199	6945	77.28	320	Pass
215	7025	77.28	320	Pass

**802.11be (EHT160)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
15	6025	158.4	320	Pass
47	6185	158.4	320	Pass
79	6345	158.4	320	Pass
111	6505	158.4	320	Pass
143	6665	158.4	320	Pass
175	6825	158.4	320	Pass
207	6985	158.4	320	Pass

**802.11be (EHT20) 26-tone RU**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	18.24	320	Pass
49	6195	16.8	320	Pass
93	6415	18.24	320	Pass
97	6435	18.12	320	Pass
105	6475	16.92	320	Pass
113	6515	18.24	320	Pass
117	6535	18.24	320	Pass
149	6695	16.92	320	Pass
181	6855	18.12	320	Pass
185	6875	18.12	320	Pass
209	6995	16.8	320	Pass
233	7115	18.24	320	Pass

**802.11be (EHT20) 52-tone RU**







Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	18.12	320	Pass
49	6195	16.8	320	Pass
93	6415	18.12	320	Pass
97	6435	18	320	Pass
105	6475	16.8	320	Pass
113	6515	17.88	320	Pass
117	6535	18.12	320	Pass
149	6695	16.92	320	Pass
181	6855	18	320	Pass
185	6875	18.12	320	Pass
209	6995	16.68	320	Pass
233	7115	18.12	320	Pass

**802.11be (EHT20) 106-tone RU**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	18.12	320	Pass
49	6195	18.12	320	Pass
93	6415	18.12	320	Pass
97	6435	18.12	320	Pass
105	6475	18.12	320	Pass
113	6515	18.12	320	Pass
117	6535	18.12	320	Pass
149	6695	18.12	320	Pass
181	6855	18	320	Pass
185	6875	18.12	320	Pass
209	6995	18	320	Pass
233	7115	18	320	Pass




### Spectrum Plot of Maximum Value

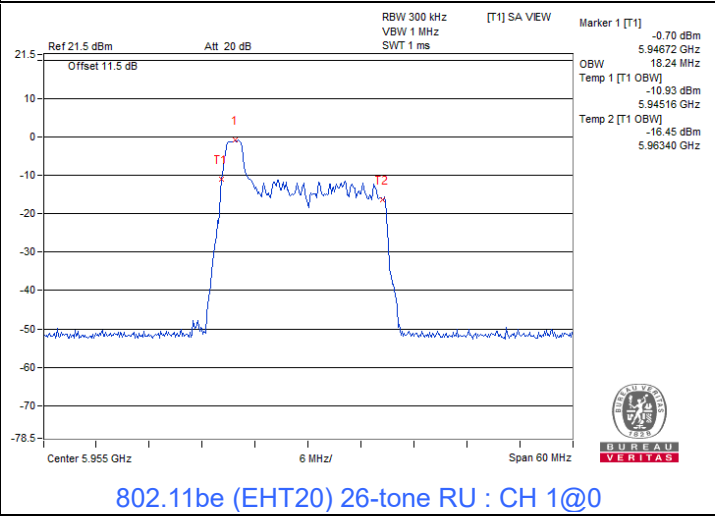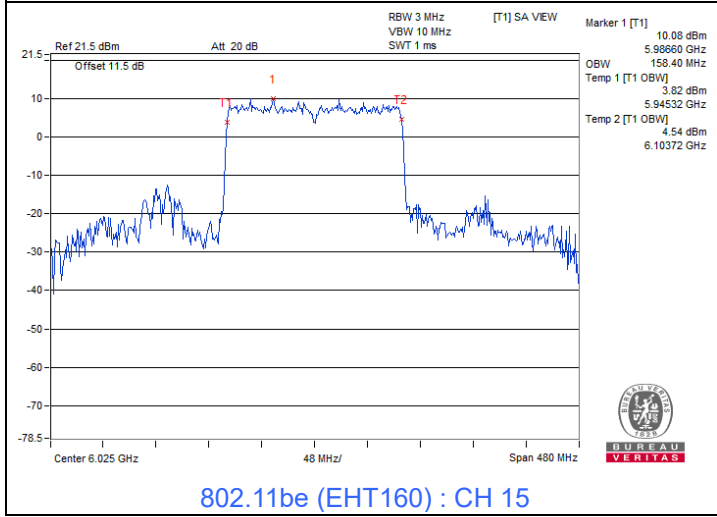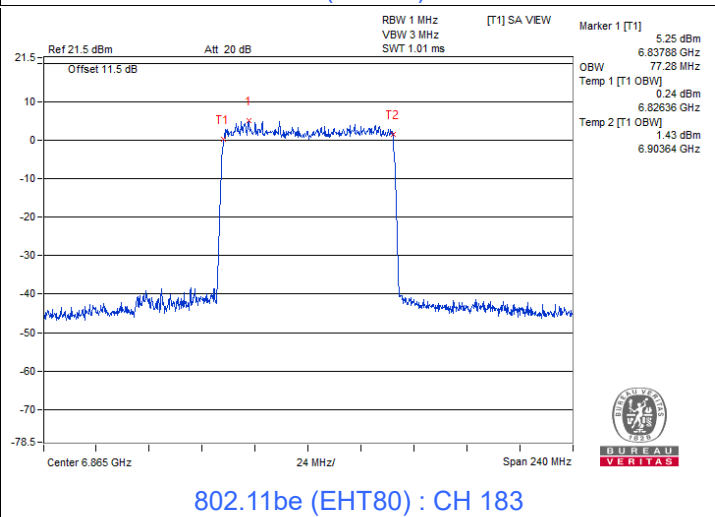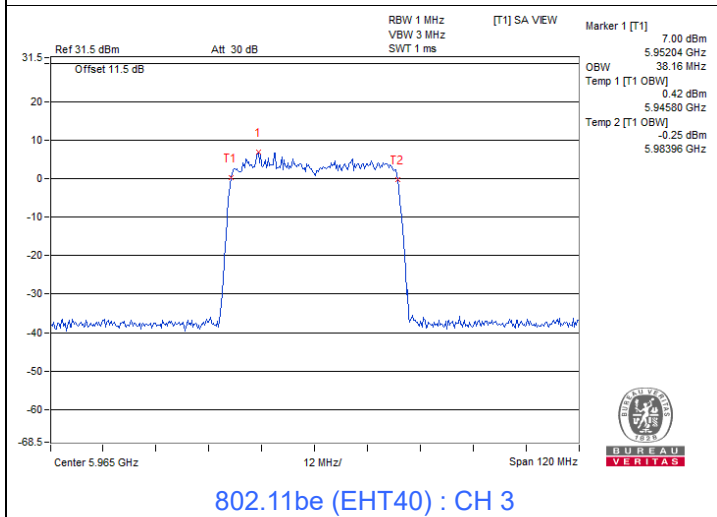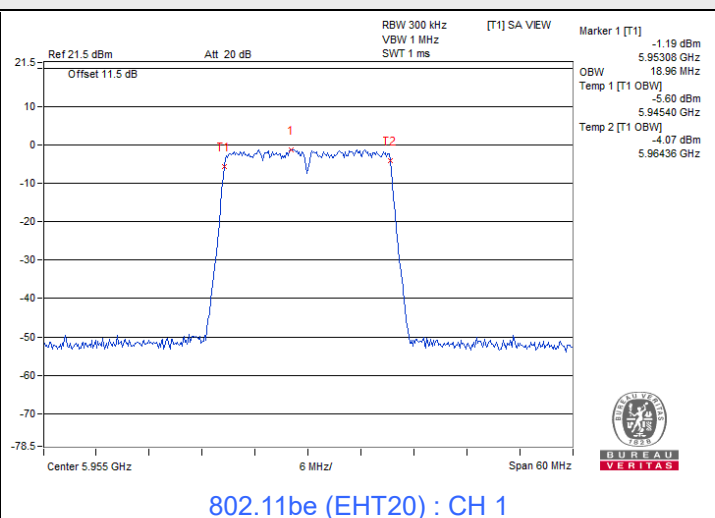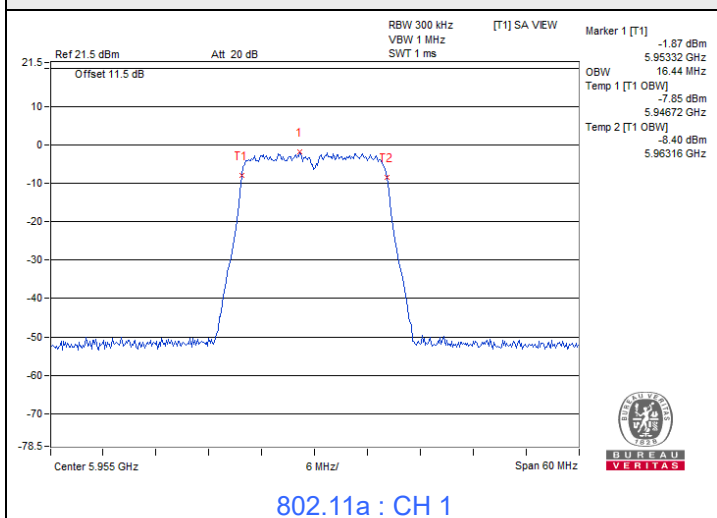




### Spectrum Plot of Maximum Value

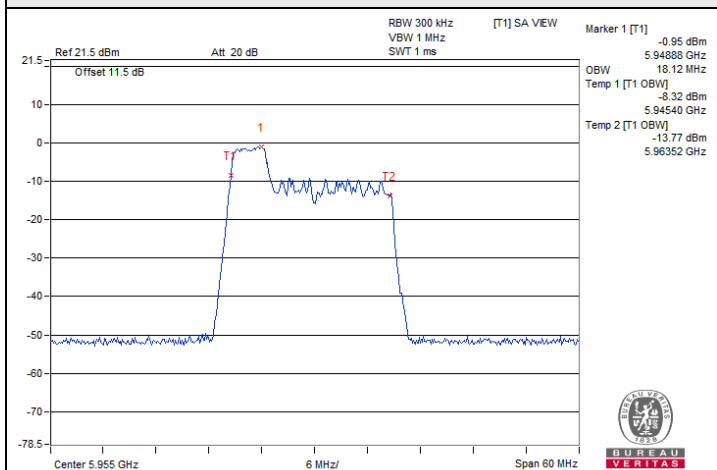

802.11be (EHT20) 52-tone RU : CH 1@37

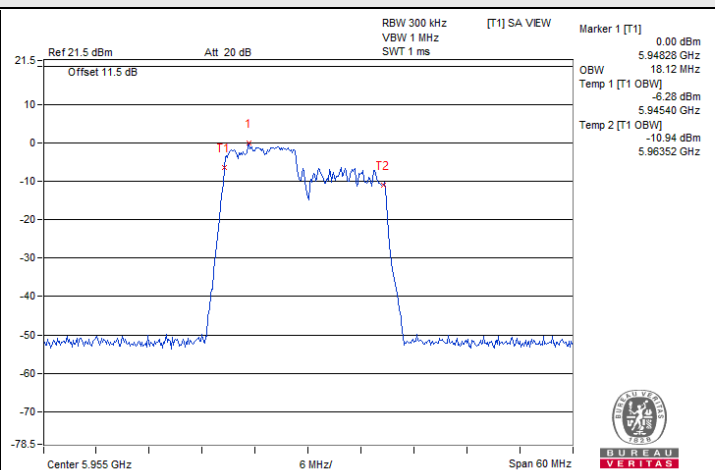

802.11be (EHT20) 106-tone RU : CH 1@53

**2TX**
**802.11a**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	16.44	16.44	320	Pass
49	6195	16.44	16.32	320	Pass
93	6415	16.44	16.44	320	Pass
97	6435	16.44	16.44	320	Pass
105	6475	16.44	16.44	320	Pass
113	6515	16.44	16.44	320	Pass
117	6535	16.44	16.44	320	Pass
149	6695	16.44	16.44	320	Pass
181	6855	16.44	16.44	320	Pass
185	6875	16.44	16.44	320	Pass
209	6995	16.44	16.44	320	Pass
233	7115	16.56	16.44	320	Pass

**802.11be (EHT20)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	18.84	18.84	320	Pass
49	6195	18.72	18.84	320	Pass
93	6415	18.84	18.84	320	Pass
97	6435	18.84	18.84	320	Pass
105	6475	18.84	18.84	320	Pass
113	6515	18.84	18.84	320	Pass
117	6535	18.72	18.72	320	Pass
149	6695	18.84	18.84	320	Pass
181	6855	18.84	18.84	320	Pass
185	6875	18.84	18.84	320	Pass
209	6995	18.84	18.84	320	Pass
233	7115	18.84	18.72	320	Pass

**802.11be (EHT40)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
3	5965	37.68	37.68	320	Pass
51	6205	37.68	37.68	320	Pass
91	6405	37.68	37.68	320	Pass
99	6445	37.92	37.68	320	Pass
107	6485	37.68	37.68	320	Pass
115	6525	37.68	37.68	320	Pass
123	6565	37.68	37.68	320	Pass
147	6685	37.68	37.68	320	Pass
179	6845	37.68	37.92	320	Pass
187	6885	37.68	37.68	320	Pass
203	6965	37.68	37.68	320	Pass
227	7085	37.68	37.44	320	Pass

**802.11be (EHT80)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
7	5985	76.80	76.80	320	Pass
55	6225	77.28	77.28	320	Pass
87	6385	76.32	76.80	320	Pass
103	6465	77.28	77.28	320	Pass
119	6545	76.80	77.28	320	Pass
135	6625	77.28	76.80	320	Pass
151	6705	76.80	76.80	320	Pass
167	6785	76.32	76.80	320	Pass
183	6865	76.80	76.80	320	Pass
199	6945	77.28	77.28	320	Pass
215	7025	77.28	76.80	320	Pass



**802.11be (EHT160)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
15	6025	156.48	156.48	320	Pass
47	6185	157.44	156.48	320	Pass
79	6345	156.48	156.48	320	Pass
111	6505	156.48	155.52	320	Pass
143	6665	156.48	155.52	320	Pass
175	6825	156.48	156.48	320	Pass
207	6985	156.48	156.48	320	Pass

**802.11be (EHT20) 26-tone RU**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	18.36	18.36	320	Pass
49	6195	17.16	17.16	320	Pass
93	6415	18.36	18.36	320	Pass
97	6435	18.48	18.48	320	Pass
105	6475	17.40	17.16	320	Pass
113	6515	18.48	18.36	320	Pass
117	6535	18.36	18.36	320	Pass
149	6695	17.16	17.16	320	Pass
181	6855	18.48	18.36	320	Pass
185	6875	18.48	18.36	320	Pass
209	6995	17.40	17.16	320	Pass
233	7115	18.36	18.36	320	Pass

**802.11be (EHT20) 52-tone RU**


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	18.24	18.24	320	Pass
49	6195	17.16	17.04	320	Pass
93	6415	18.24	18.24	320	Pass
97	6435	18.24	18.24	320	Pass
105	6475	17.16	17.04	320	Pass
113	6515	18.24	18.24	320	Pass
117	6535	18.24	18.24	320	Pass
149	6695	17.04	16.92	320	Pass
181	6855	18.12	18.24	320	Pass
185	6875	18.24	18.24	320	Pass
209	6995	17.16	17.16	320	Pass
233	7115	18.24	18.24	320	Pass

**802.11be (EHT20) 106-tone RU**


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	18.12	18.12	320	Pass
49	6195	18.24	18.12	320	Pass
93	6415	18.12	18.12	320	Pass
97	6435	18.12	18.12	320	Pass
105	6475	18.24	18.12	320	Pass
113	6515	18.12	18.12	320	Pass
117	6535	18.24	18.24	320	Pass
149	6695	18.00	18.12	320	Pass
181	6855	18.12	18.12	320	Pass
185	6875	18.24	18.00	320	Pass
209	6995	18.24	18.12	320	Pass
233	7115	18.00	18.12	320	Pass




### Spectrum Plot of Maximum Value

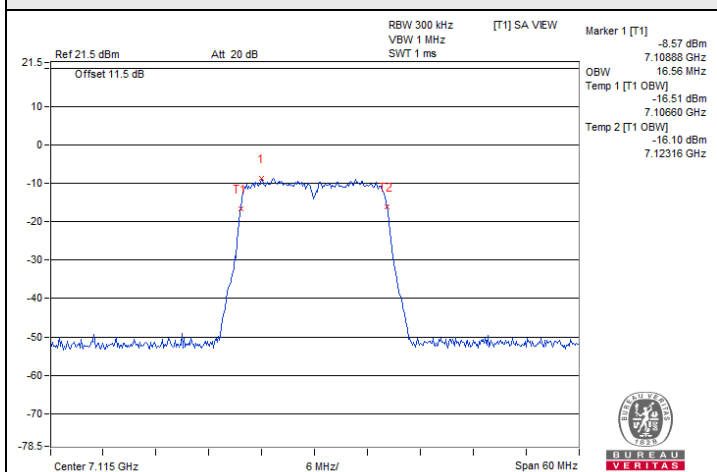


802.11a / Chain 0 : CH 233

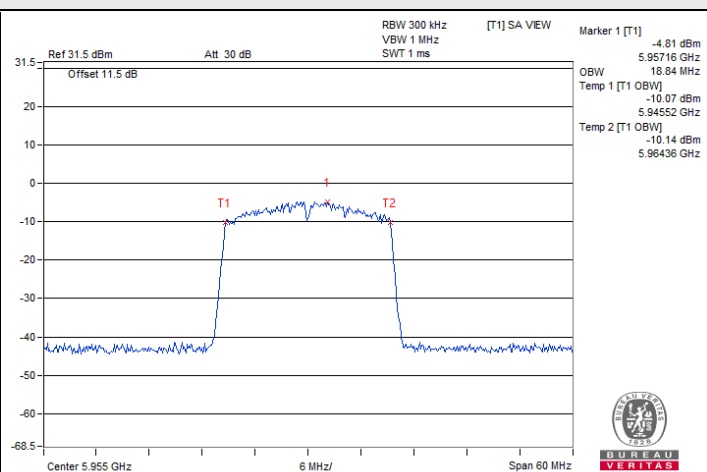


802.11be (EHT20) / Chain 0 : CH 1

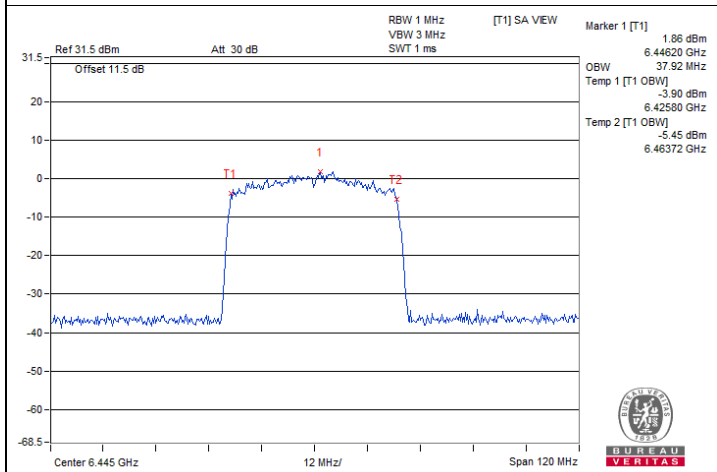


802.11be (EHT40) / Chain 0 : CH 99

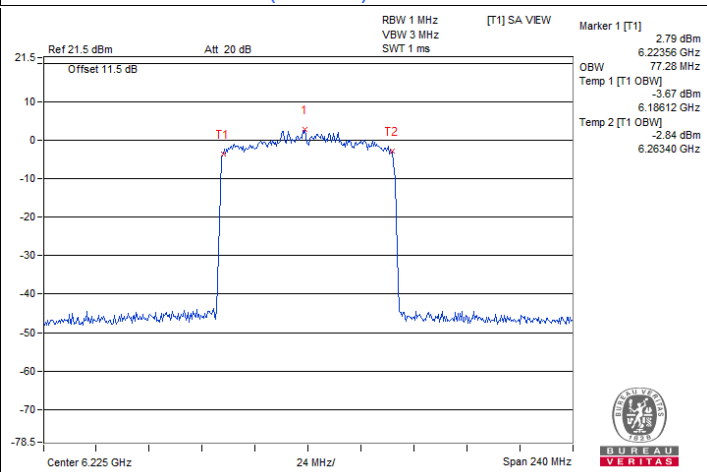

802.11be (EHT80) / Chain 0 : CH 55

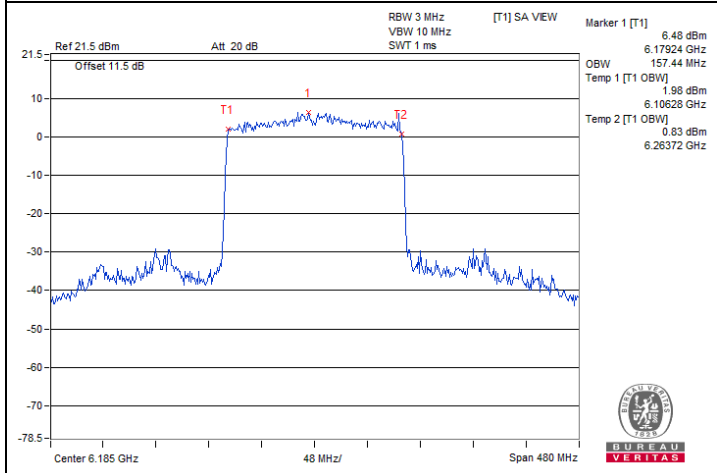


802.11be (EHT160) / Chain 0 : CH 47

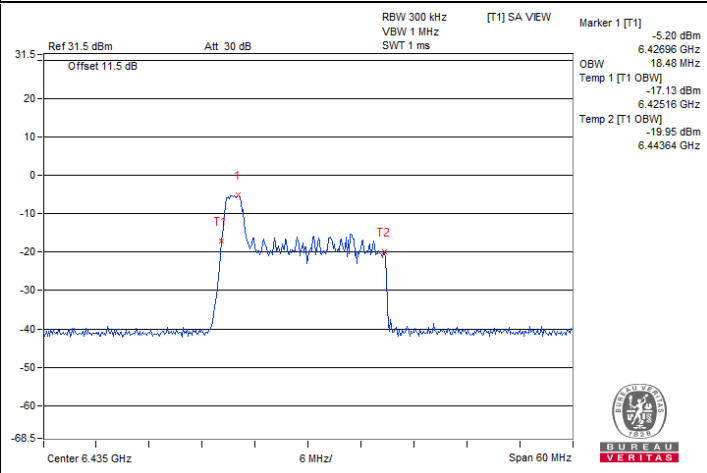

802.11be (EHT20) 26-tone RU / Chain 0 : CH 97@0



### Spectrum Plot of Maximum Value

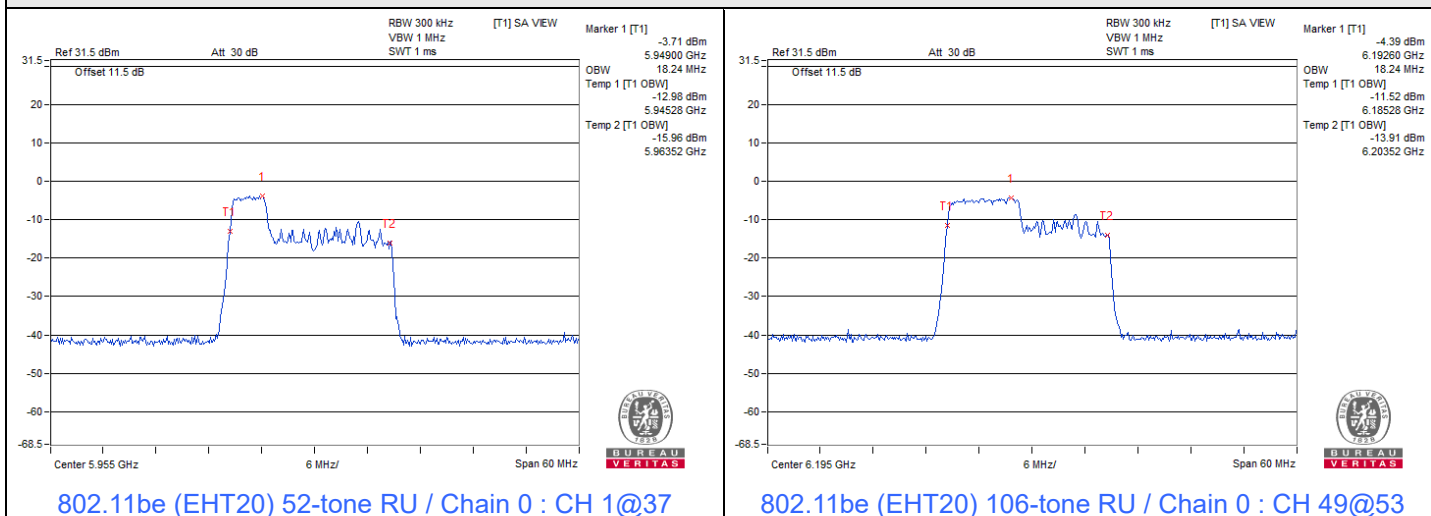



Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Ivan Tseng
--------------	---------	---------------------------	--------------	------------	------------

under control of standard power AP

1TX

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	18.84	320	Pass
49	6195	22.2	320	Pass
93	6415	23.52	320	Pass
117	6535	28.2	320	Pass
149	6695	26.64	320	Pass
181	6855	24.84	320	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	19.32	320	Pass
49	6195	21.84	320	Pass
93	6415	21.48	320	Pass
117	6535	25.92	320	Pass
149	6695	24.36	320	Pass
181	6855	20.76	320	Pass

802.11be (EHT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
3	5965	39.84	320	Pass
51	6205	49.92	320	Pass
91	6405	48	320	Pass
123	6565	54.48	320	Pass
147	6685	52.8	320	Pass
179	6845	58.08	320	Pass

**802.11be (EHT80)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
7	5985	94.08	320	Pass
55	6225	134.4	320	Pass
87	6385	128.16	320	Pass
135	6625	133.92	320	Pass
151	6705	138.24	320	Pass
167	6785	141.12	320	Pass

**802.11be (EHT160)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
15	6025	159.36	320	Pass
47	6185	195.84	320	Pass
79	6345	156.48	320	Pass
143	6665	157.44	320	Pass

**802.11be (EHT20) 26-tone RU**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	18.24	320	Pass
49	6195	16.8	320	Pass
93	6415	18.12	320	Pass
117	6535	18.24	320	Pass
149	6695	16.92	320	Pass
181	6855	18.12	320	Pass


**802.11be (EHT20) 52-tone RU**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	18.12	320	Pass
49	6195	17.04	320	Pass
93	6415	18	320	Pass
117	6535	18.12	320	Pass
149	6695	17.04	320	Pass
181	6855	18	320	Pass


**802.11be (EHT20) 106-tone RU**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	18.24	320	Pass
49	6195	18.24	320	Pass
93	6415	18.24	320	Pass
117	6535	18.24	320	Pass
149	6695	18.48	320	Pass
181	6855	18.12	320	Pass


**Spectrum Plot of Maximum Value**

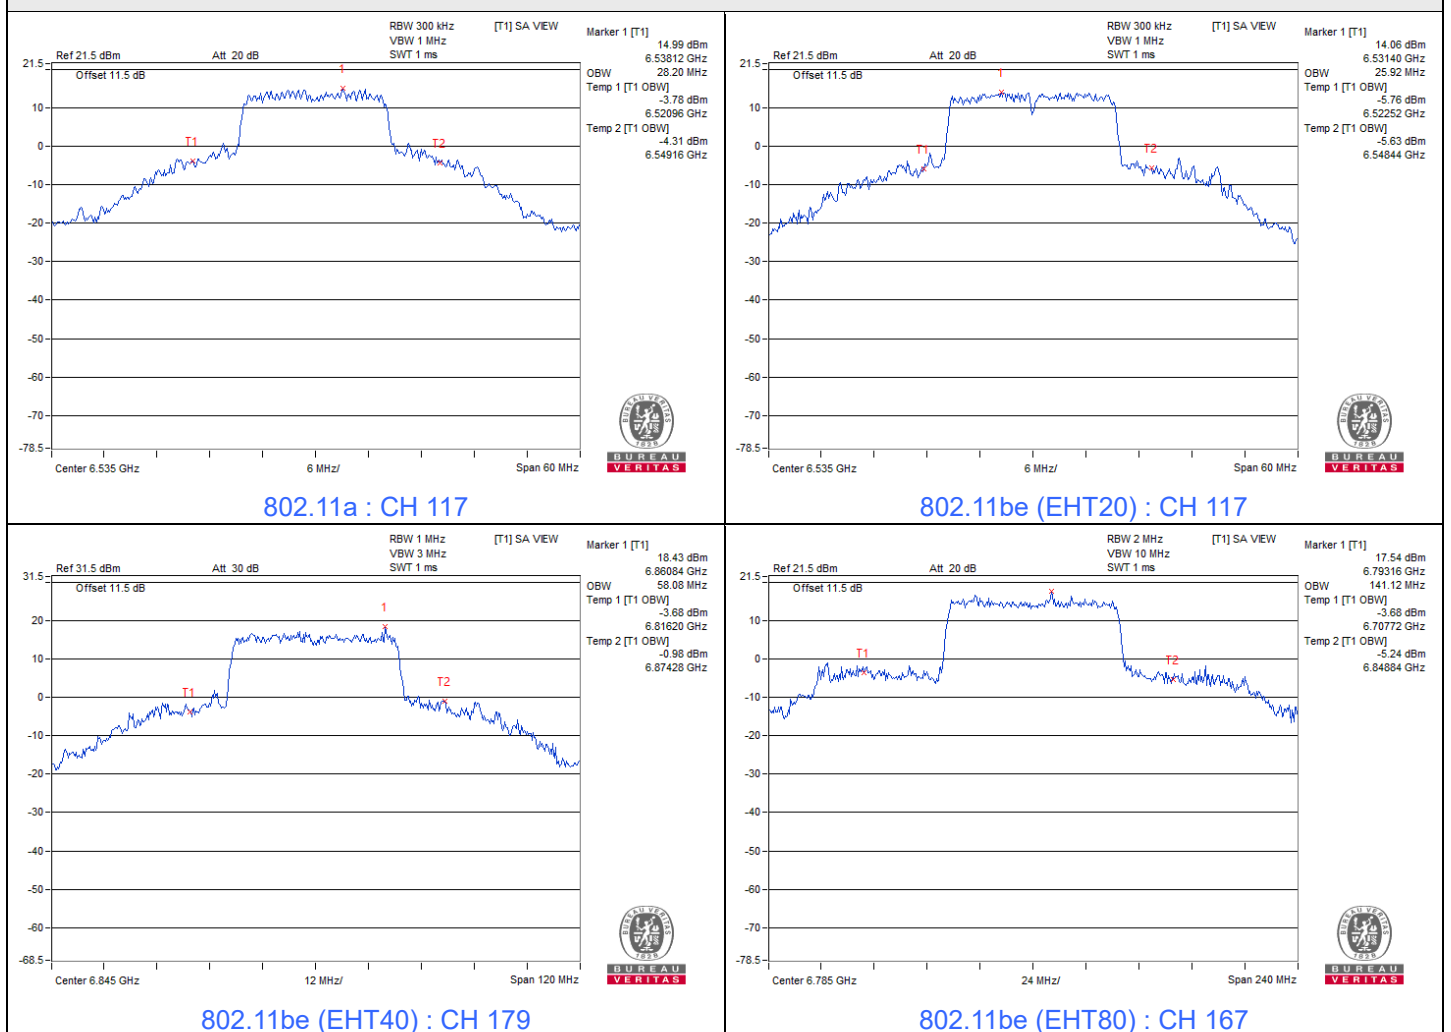


### Spectrum Plot of Maximum Value

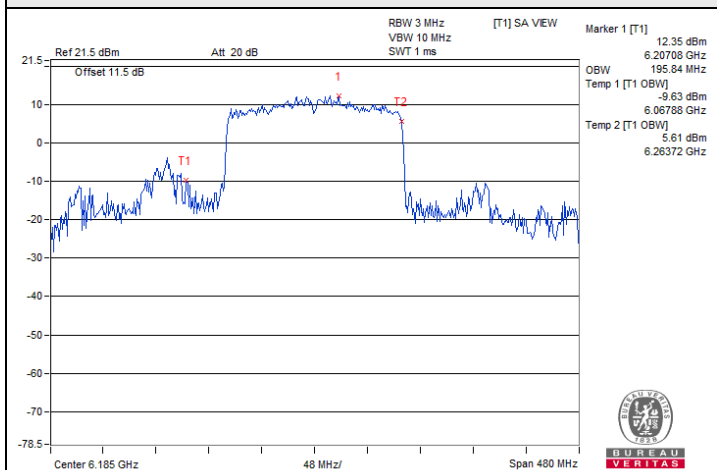


802.11be (EHT160) : CH 47

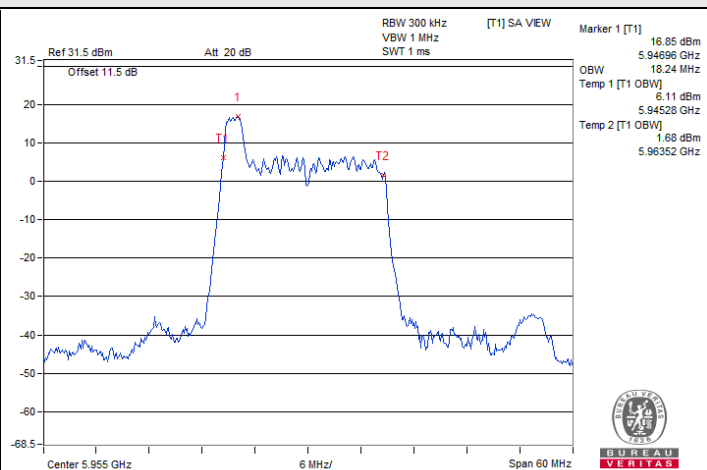

802.11be (EHT20) 26-tone RU : CH 1@0

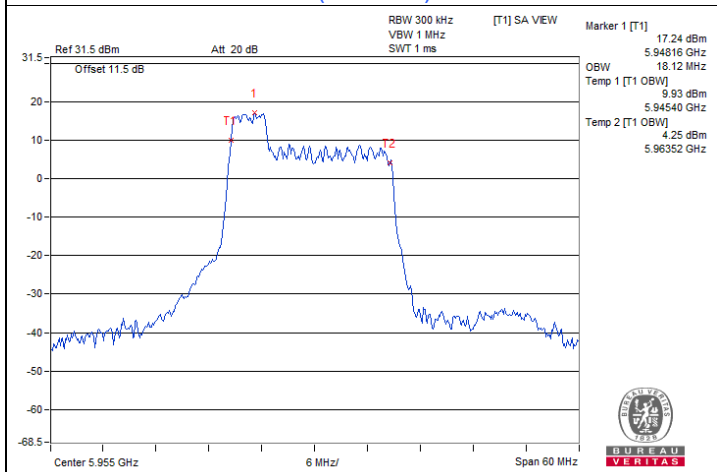

802.11be (EHT20) 52-tone RU : CH 1@37

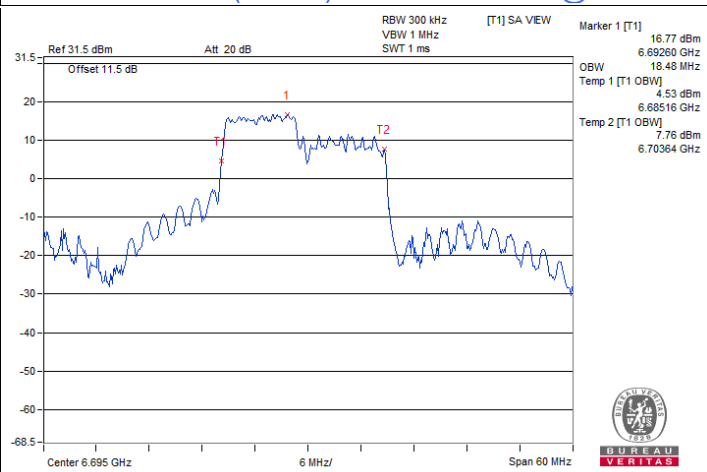

802.11be (EHT20) 106-tone RU : CH 149@53



**2TX**
**802.11a**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	16.44	16.44	320	Pass
49	6195	16.44	16.44	320	Pass
93	6415	16.44	16.44	320	Pass
117	6535	16.44	16.44	320	Pass
149	6695	16.44	16.44	320	Pass
181	6855	16.44	16.44	320	Pass

**802.11be (EHT20)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	18.96	18.84	320	Pass
49	6195	18.84	18.84	320	Pass
93	6415	18.84	18.84	320	Pass
117	6535	18.84	18.84	320	Pass
149	6695	18.96	18.96	320	Pass
181	6855	18.96	18.84	320	Pass

**802.11be (EHT40)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
3	5965	38.16	38.16	320	Pass
51	6205	47.04	49.68	320	Pass
91	6405	48.00	39.60	320	Pass
123	6565	54.96	49.92	320	Pass
147	6685	53.28	48.24	320	Pass
179	6845	48.24	42.72	320	Pass

**802.11be (EHT80)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
7	5985	77.28	77.28	320	Pass
55	6225	130.56	112.32	320	Pass
87	6385	77.52	77.04	320	Pass
135	6625	135.84	127.68	320	Pass
151	6705	135.84	128.64	320	Pass
167	6785	123.84	119.04	320	Pass

**802.11be (EHT160)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
15	6025	157.44	157.92	320	Pass
47	6185	159.36	159.36	320	Pass
79	6345	156.48	157.44	320	Pass
143	6665	157.44	158.40	320	Pass

**802.11be (EHT20) 26-tone RU**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	18.24	18.24	320	Pass
49	6195	16.80	16.68	320	Pass
93	6415	18.12	18.12	320	Pass
117	6535	18.00	18.24	320	Pass
149	6695	16.68	16.80	320	Pass
181	6855	18.12	18.00	320	Pass


**802.11be (EHT20) 52-tone RU**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	18.00	17.88	320	Pass
49	6195	16.92	16.80	320	Pass
93	6415	18.00	18.12	320	Pass
117	6535	18.12	18.00	320	Pass
149	6695	16.92	16.92	320	Pass
181	6855	18.24	18.00	320	Pass

802.11be (EHT20) 106-tone RU


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	18.00	18.12	320	Pass
49	6195	18.24	18.00	320	Pass
93	6415	18.06	18.00	320	Pass
117	6535	17.88	18.00	320	Pass
149	6695	18.00	18.00	320	Pass
181	6855	18.00	18.00	320	Pass

Spectrum Plot of Maximum Value

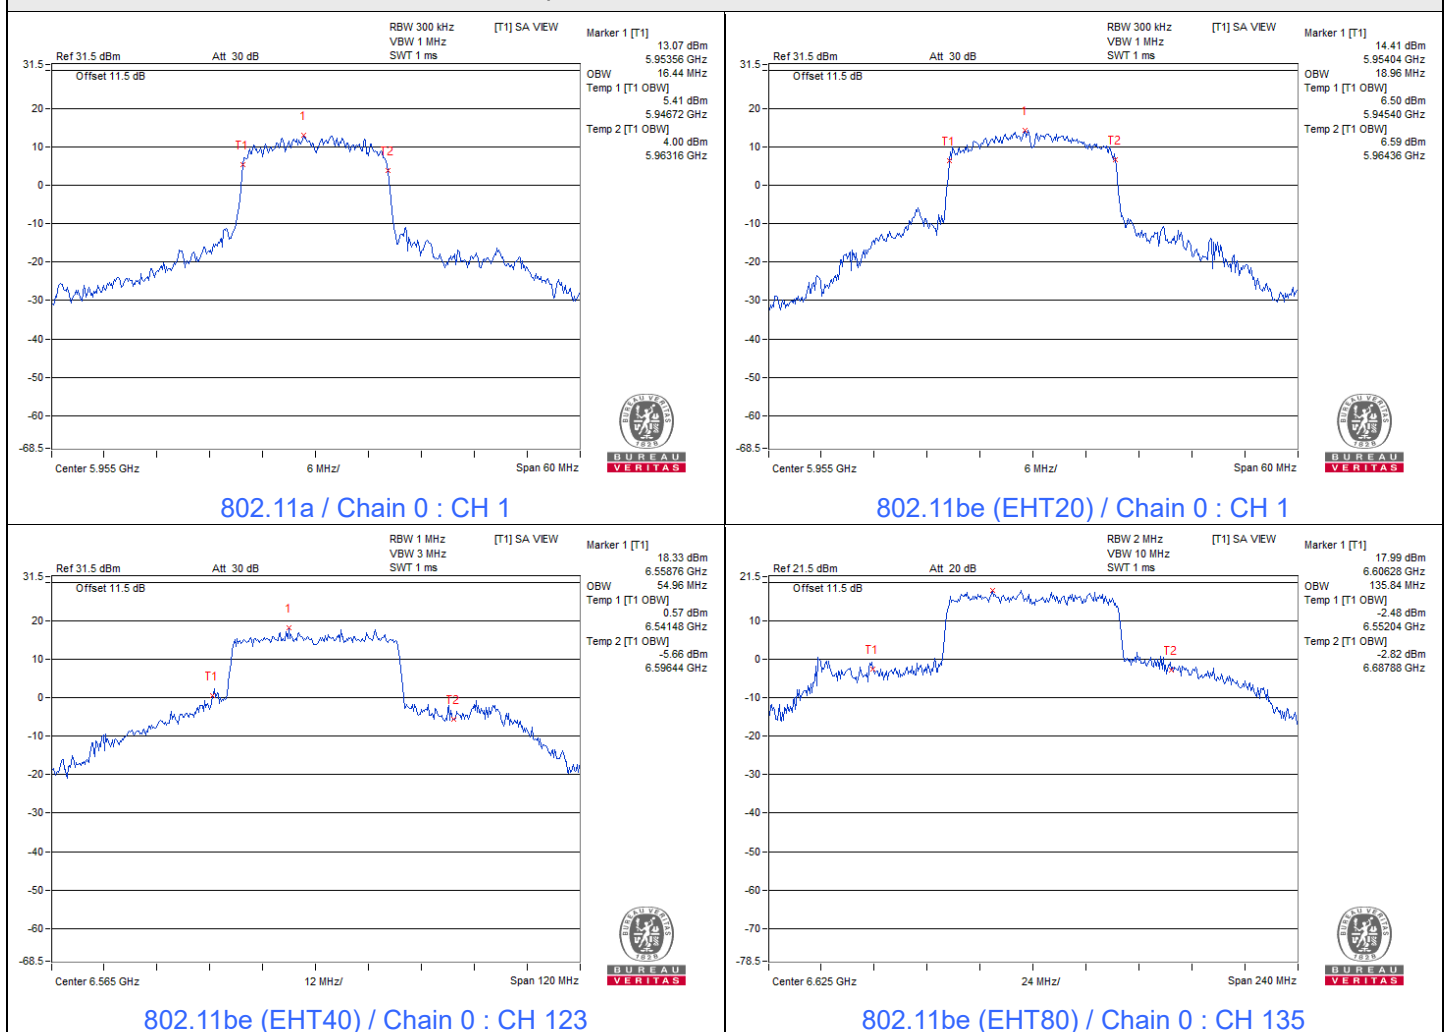





### Spectrum Plot of Maximum Value

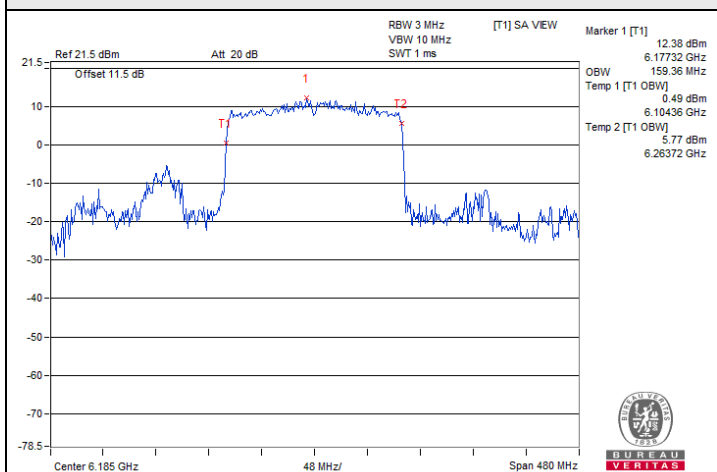


802.11be (EHT160) / Chain 0 : CH 47

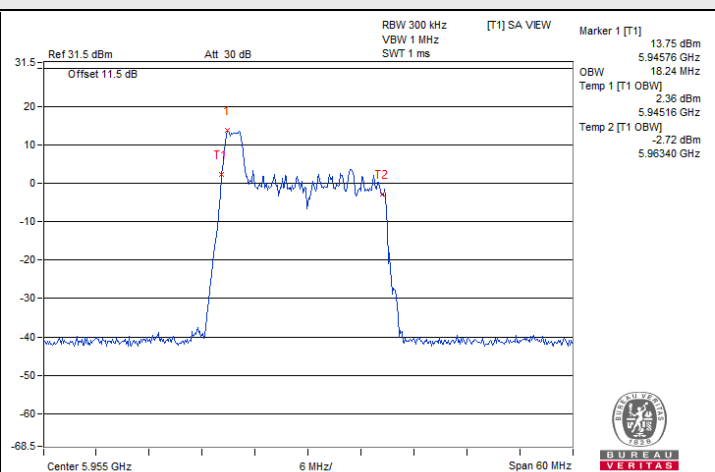

802.11be (EHT20) 26-tone RU / Chain 0 : CH 1@0

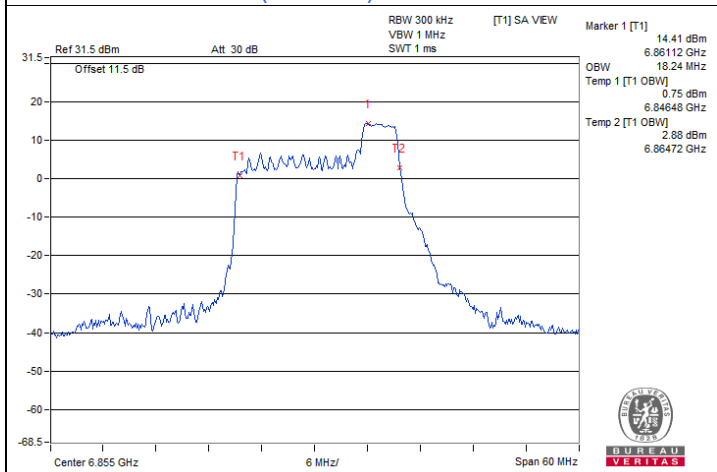

802.11be (EHT20) 52-tone RU / Chain 0 : CH 181@40

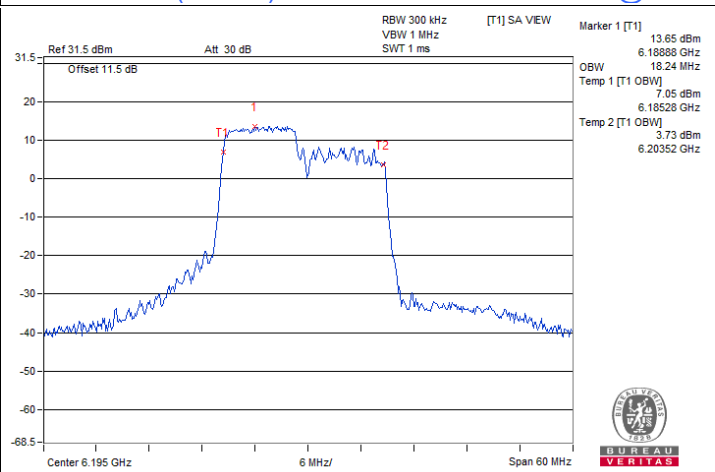

802.11be (EHT20) 106-tone RU / Chain 0 : CH 49@53

## 7.6 Frequency Stability

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Ivan Tseng
--------------	---------	---------------------------	--------------	------------	------------

Frequency Stability Versus Temperature									
Operating Frequency: 5955 MHz									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
70	3.3	5955.017	Pass	5955.0157	Pass	5955.018	Pass	5955.0169	Pass
60	3.3	5955.0013	Pass	5955.0024	Pass	5955.0005	Pass	5955.0004	Pass
50	3.3	5954.9904	Pass	5954.9935	Pass	5954.9901	Pass	5954.9916	Pass
40	3.3	5955.0034	Pass	5955.0054	Pass	5955.0038	Pass	5955.0042	Pass
30	3.3	5955.0055	Pass	5955.0052	Pass	5955.0045	Pass	5955.0066	Pass
20	3.3	5955.0028	Pass	5954.9994	Pass	5955.0022	Pass	5955.0029	Pass
10	3.3	5955.0198	Pass	5955.0202	Pass	5955.0219	Pass	5955.0243	Pass
0	3.3	5955.0203	Pass	5955.0214	Pass	5955.0208	Pass	5955.0242	Pass
-10	3.3	5954.9709	Pass	5954.9732	Pass	5954.9695	Pass	5954.9688	Pass
-20	3.3	5955.0191	Pass	5955.0202	Pass	5955.0202	Pass	5955.02	Pass

Frequency Stability Versus Voltage									
Operating Frequency: 5955 MHz									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
20	3.795	5955.0066	Pass	5955.0058	Pass	5955.0066	Pass	5955.0101	Pass
	3.3	5955.0028	Pass	5954.9994	Pass	5955.0022	Pass	5955.0029	Pass
	2.805	5954.9948	Pass	5954.9967	Pass	5954.9971	Pass	5954.9974	Pass

## 7.7 Contention-based Protocol

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Tobey Chen
--------------	---------	---------------------------	--------------	------------	------------

### Companion Device Information

Product	Brand	Model No.	Software/Firmware Version
BE19000 Tri-Band Wi-Fi 7 Router	tp-link	Archer BE800	1.0.8 Build 20230926 rel.77142(5553)

Note: Devices does not use channel puncturing and bandwidth reduction for CBP function


For U-NII-5

Contention Based Protocol Measurement														
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status				
				Freq. (MHz)	Power (dBm)									
802.11be	20	53	6215	6215	-71.07	-2.28	0	-68.79	-62	OFF				
					-71.57	-2.28	0	-69.29	-62	Minimal				
					-84.28	-2.28	0	-82	-62	ON				
					160	47	6185	6110	-66.06	-2.28	0	-63.78	-62	OFF
									-66.56	-2.28	0	-64.28	-62	Minimal
									-84.28	-2.28	0	-82	-62	ON
	6185	6185	6185	6185	-68.14	-2.28	0	-65.86	-62	OFF				
					-68.64	-2.28	0	-66.36	-62	Minimal				
					-84.28	-2.28	0	-82	-62	ON				
					6260	6260	6260	6260	-65.66	-2.28	0	-63.38	-62	OFF
									-66.16	-2.28	0	-63.88	-62	Minimal
									-84.28	-2.28	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6215	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6110	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6185	v	v	v	v	v	x	v	v	v	v	90%	90%	Pass
		6260	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

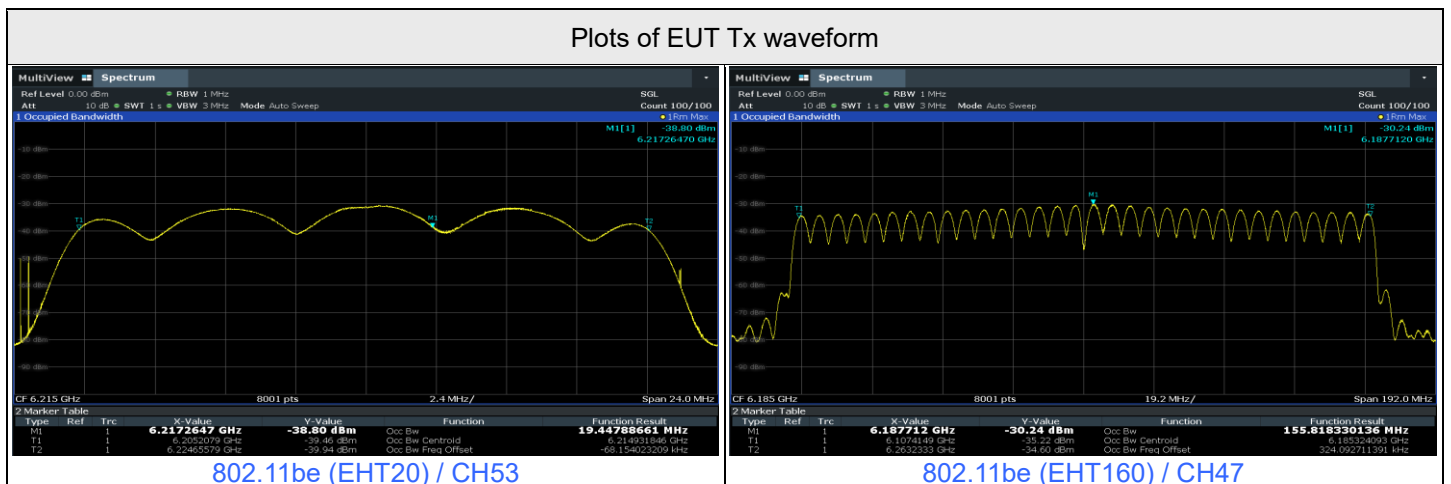


### Plots of Injected signal (AWGN) level

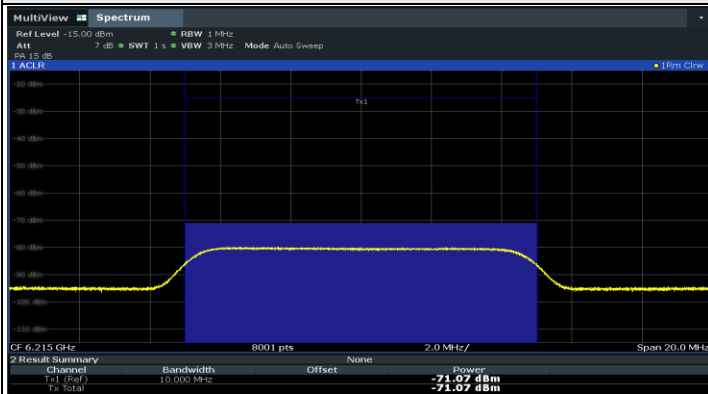


802.11be (EHT20) / CH53

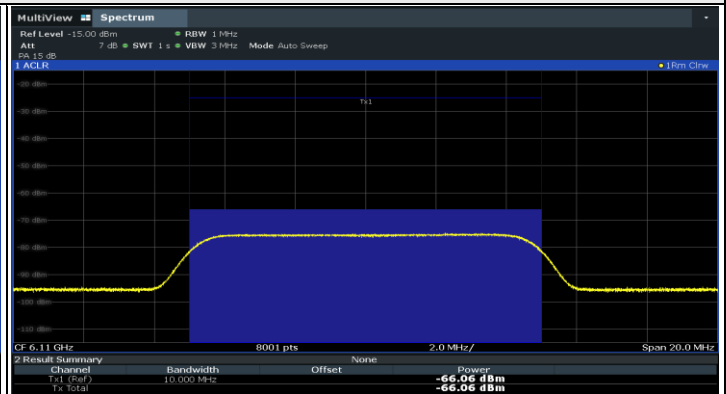

802.11be (EHT160) / CH47(Low Edge)

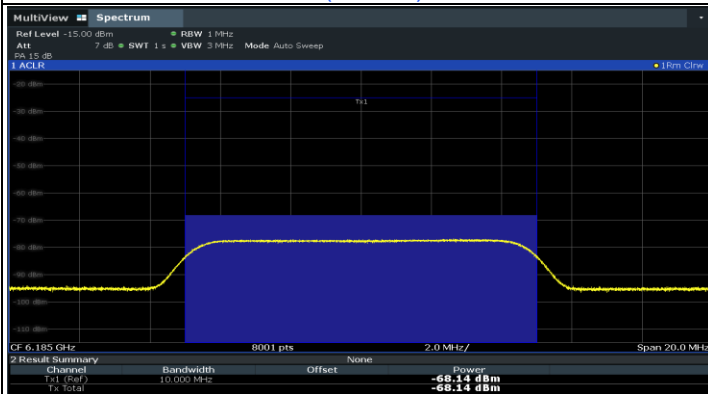


802.11be (EHT160) / CH47(Middle)

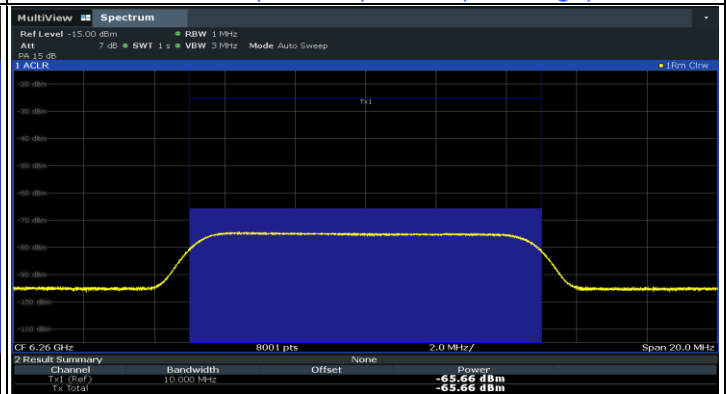

802.11be (EHT160) / CH47(High Edge)

### Plots of EUT ceased transmission in the time domain

#### UNII5\_20M\_6215\_Test Result

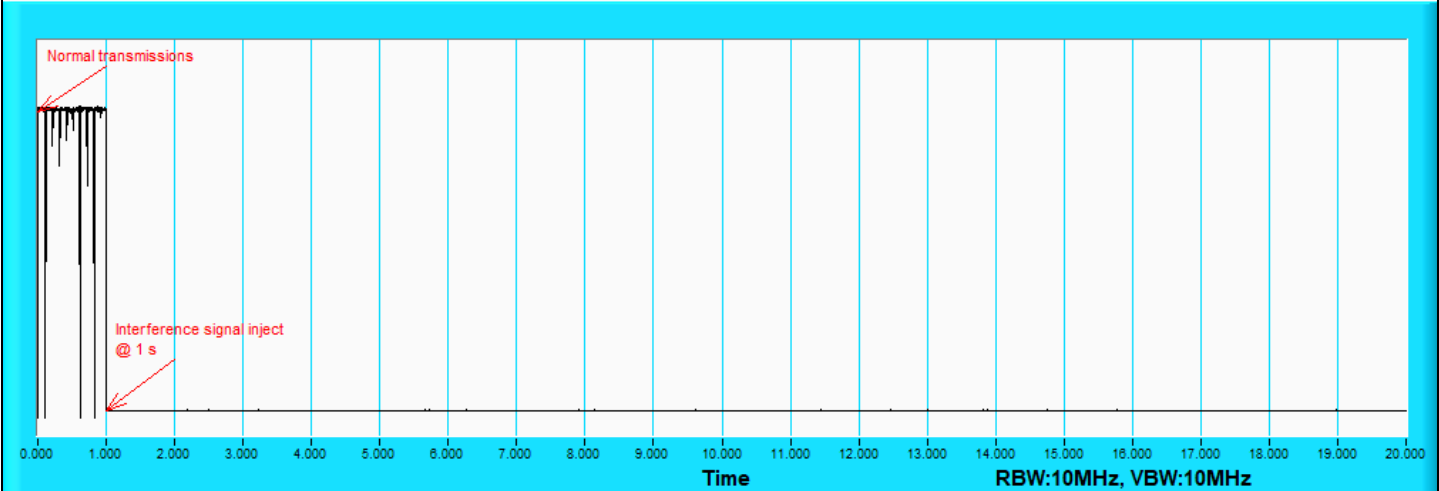


802.11be (EHT20) / CH53




Plots of EUT ceased transmission in the time domain

**UNII5\_160M\_6110\_Test Result**

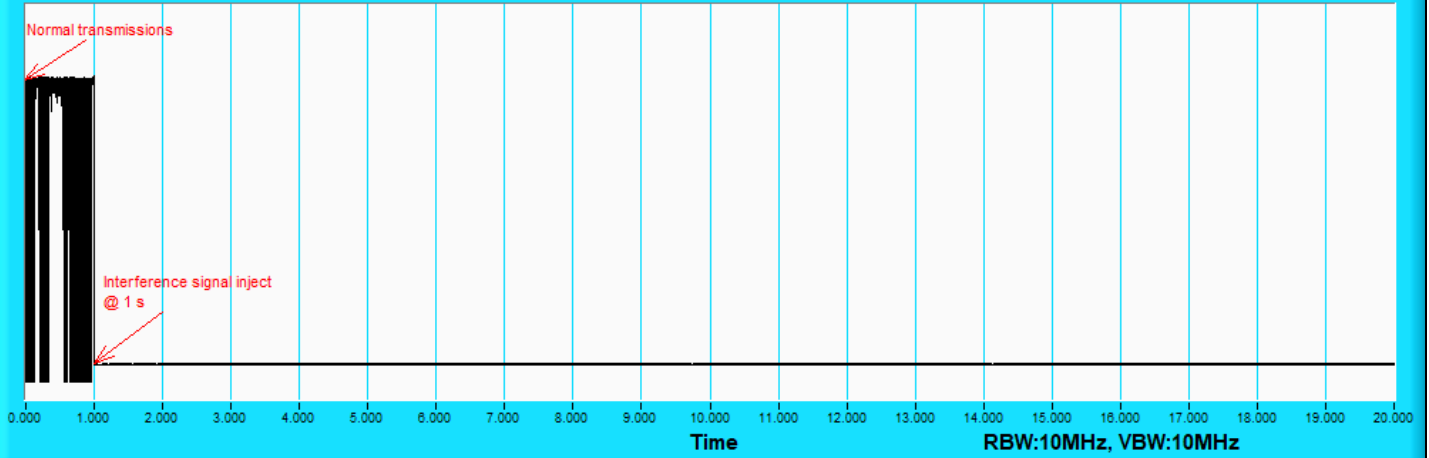


802.11be (EHT160) / CH47(Low Edge)

**UNII5\_160M\_6185\_Test Result**

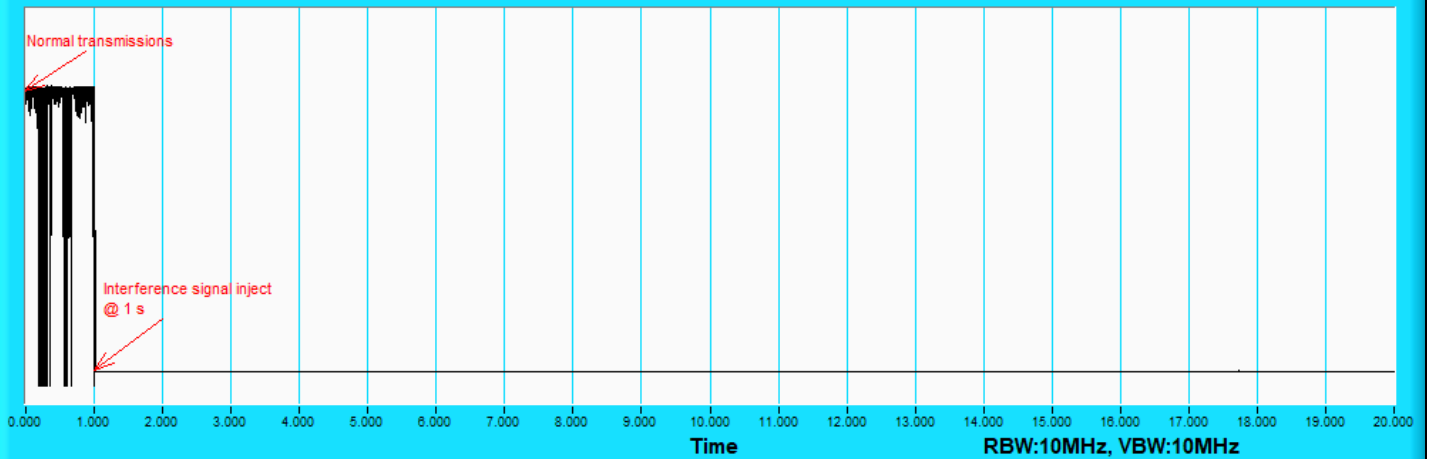

802.11be (EHT160) / CH47(Middle)

**UNII5\_160M\_6260\_Test Result**

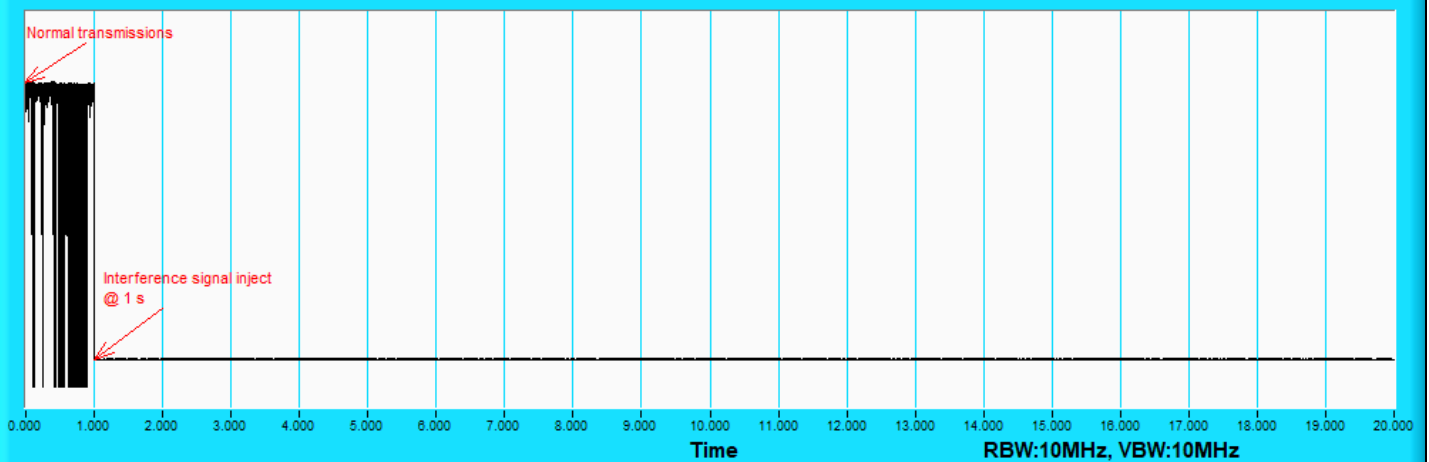

802.11be (EHT160) / CH47(High Edge)


Contention Based Protocol Measurement											
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status	
				Freq. (MHz)	Power (dBm)						
802.11be	20	105	6475	6475	-73.72	-2.28	0	-71.44	-62	OFF	
					-74.22	-2.28	0	-71.94	-62	Minimal	
					-84.28	-2.28	0	-82	-62	ON	
	160	111	6505	6430	-67.38	-2.28	0	-65.1	-62	OFF	
					-67.88	-2.28	0	-65.6	-62	Minimal	
					-84.28	-2.28	0	-82	-62	ON	
	160	111	6505	6505	-71.08	-2.28	0	-68.8	-62	OFF	
					-71.58	-2.28	0	-69.3	-62	Minimal	
					-84.28	-2.28	0	-82	-62	ON	
					6580	-69.71	-2.28	0	-67.43	-62	OFF
						-70.21	-2.28	0	-67.93	-62	Minimal
						-84.28	-2.28	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6475	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6430	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6505	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6580	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

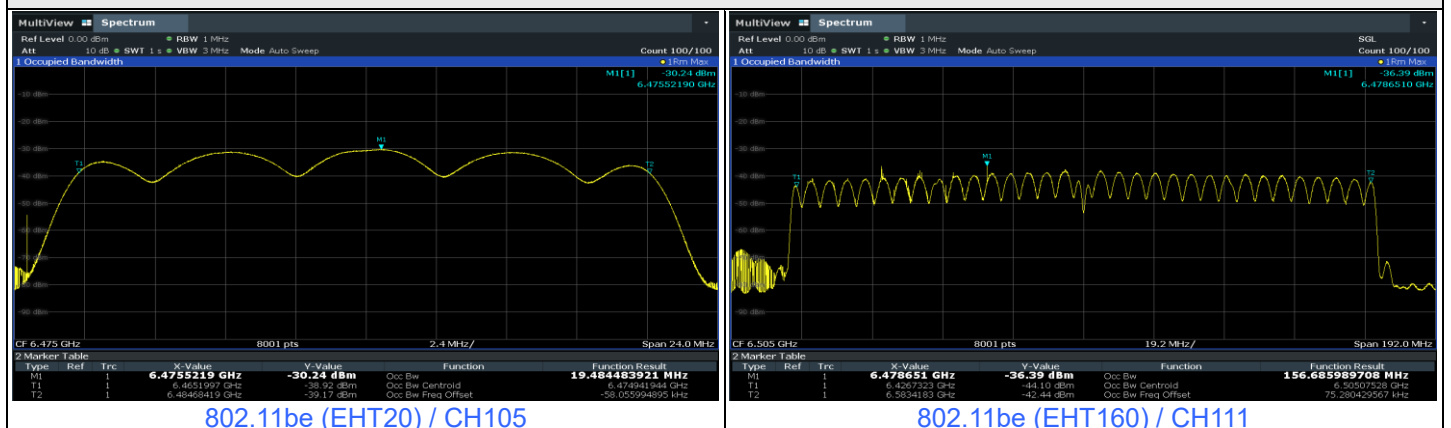


### Plots of Injected signal (AWGN) level

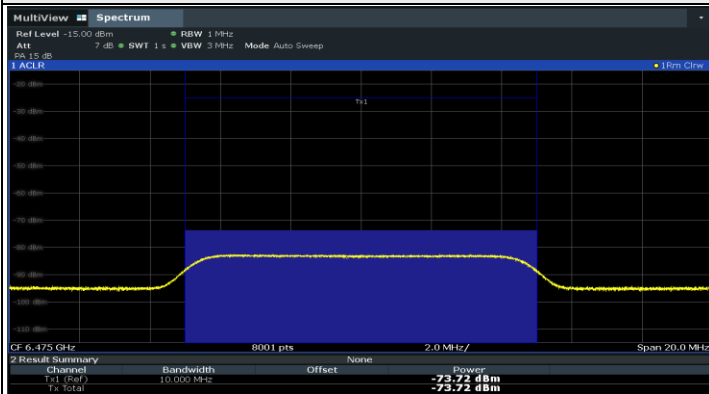


802.11be (EHT20) / CH105

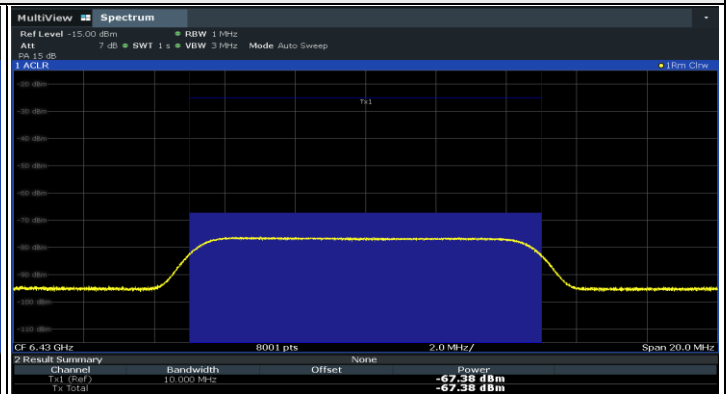

802.11be (EHT160) / CH111(Low Edge)

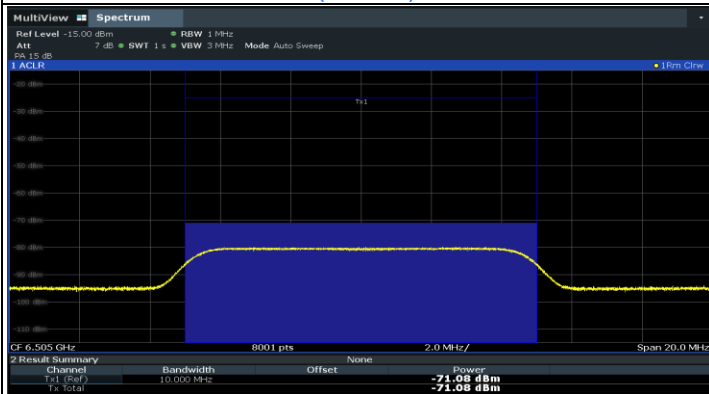


802.11be (EHT160) / CH111(Middle)

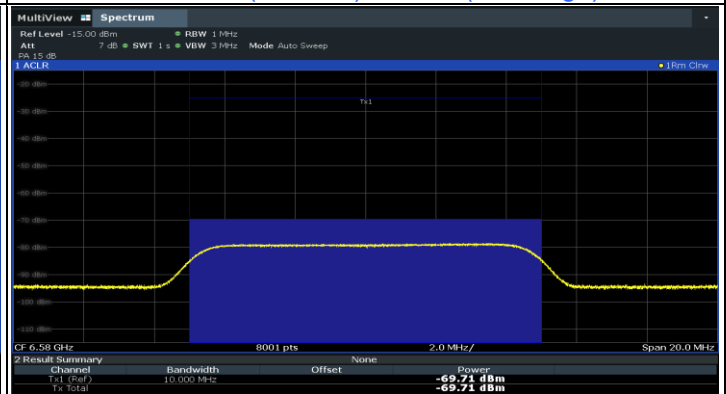

802.11be (EHT160) / CH111(High Edge)

### Plots of EUT ceased transmission in the time domain


#### UNII6\_20M\_6475\_Test Result

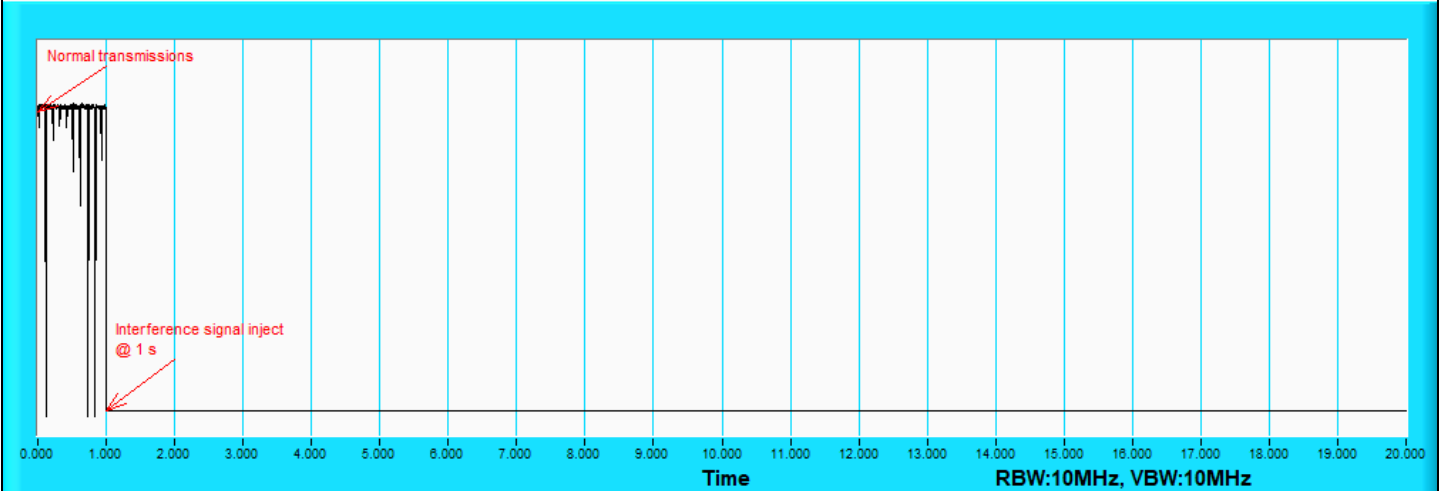

802.11be (EHT20) / CH105


Plots of EUT ceased transmission in the time domain

UNII6\_160M\_6430\_Test Result

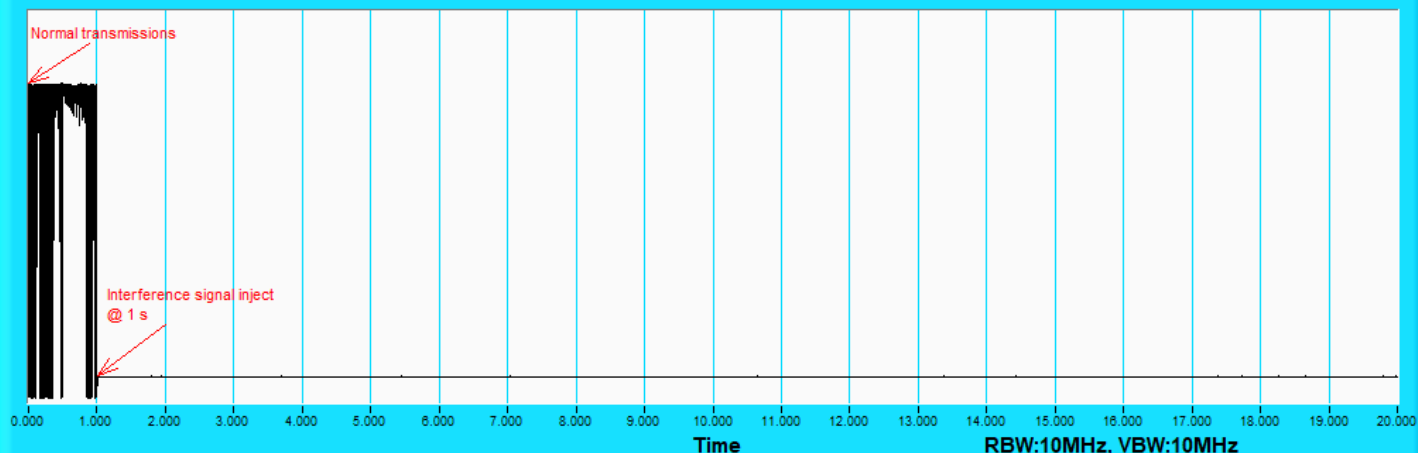


802.11be (EHT160) / CH111(Low Edge)

UNII6\_160M\_6505\_Test Result

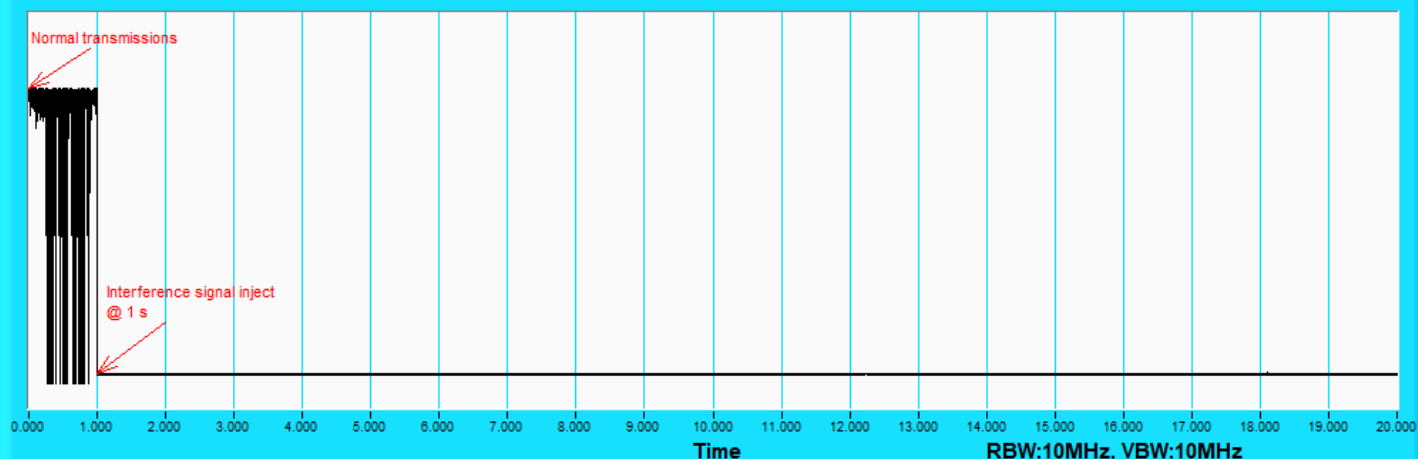

802.11be (EHT160) / CH111(Middle)

UNII6\_160M\_6580\_Test Result

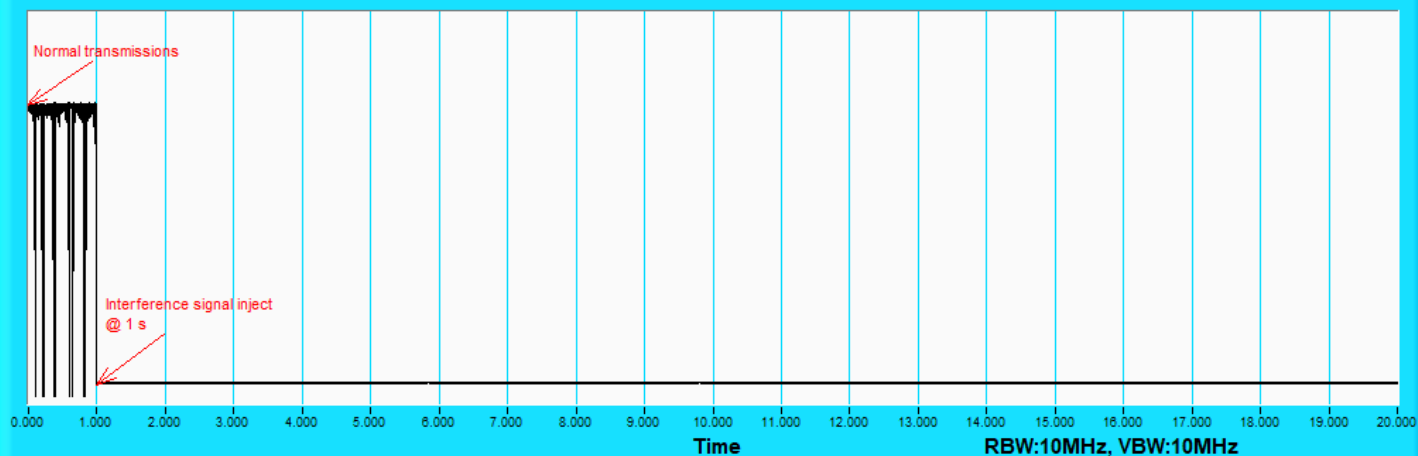

802.11be (EHT160) / CH111(High Edge)




Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-71.52	-2.28	0	-69.24	-62	OFF
					-72.02	-2.28	0	-69.74	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
	160	143	6665	6590	-67.12	-2.28	0	-64.84	-62	OFF
					-67.62	-2.28	0	-65.34	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
	6665	6740	6665	6665	-70.14	-2.28	0	-67.86	-62	OFF
					-70.64	-2.28	0	-68.36	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
					-66.31	-2.28	0	-64.03	-62	OFF
					-66.81	-2.28	0	-64.53	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
			802.11be	20	6695	x	v	v	v	v	v	v			
802.11be	160	6590	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6665	v	v	v	v	v	v	v	v	x	v	90%	90%	Pass
		6740	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

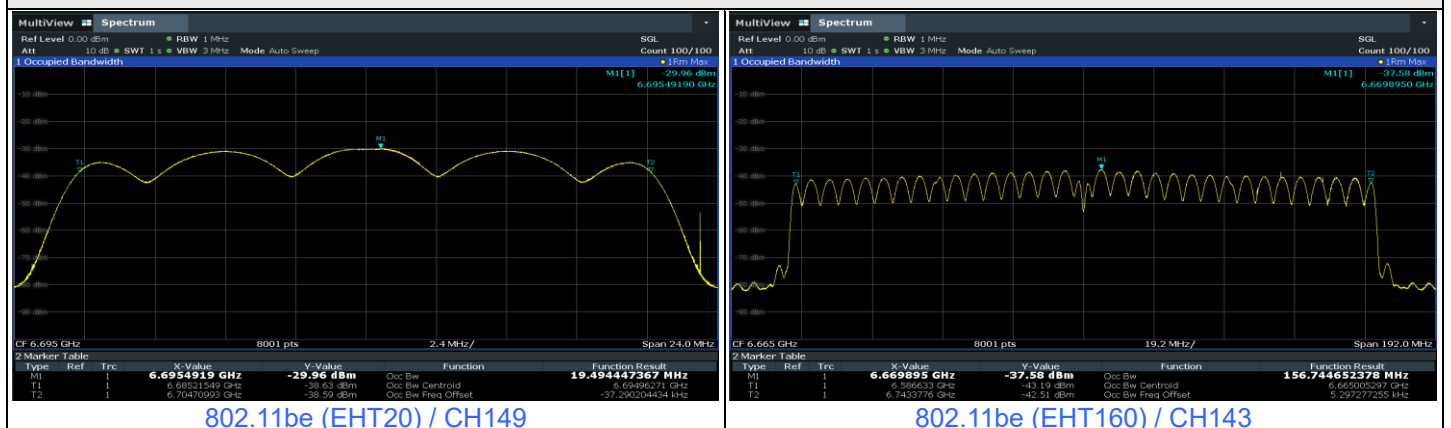


### Plots of Injected signal (AWGN) level

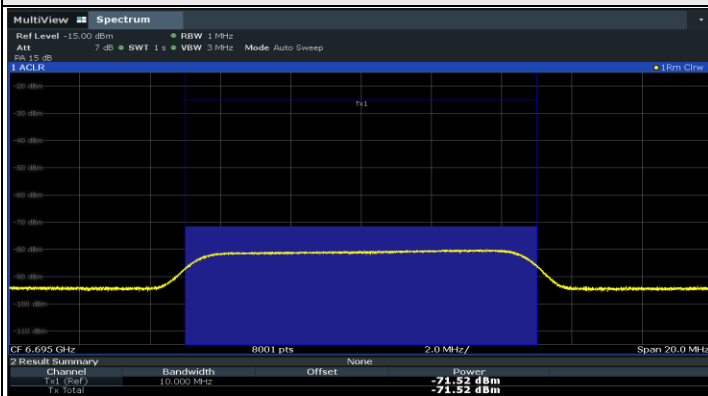


802.11be (EHT20) / CH149

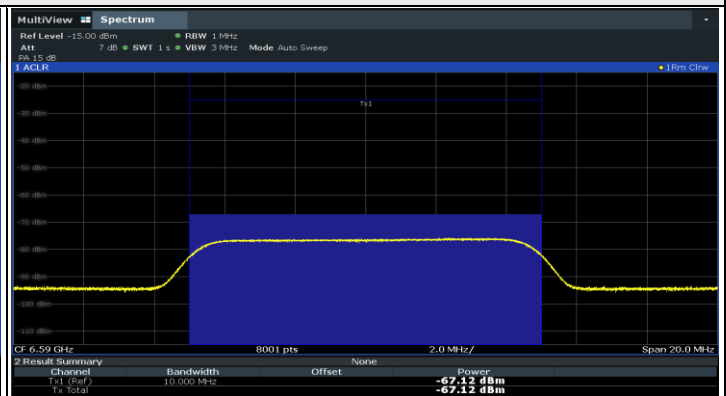

802.11be (EHT160) / CH143(Low Edge)

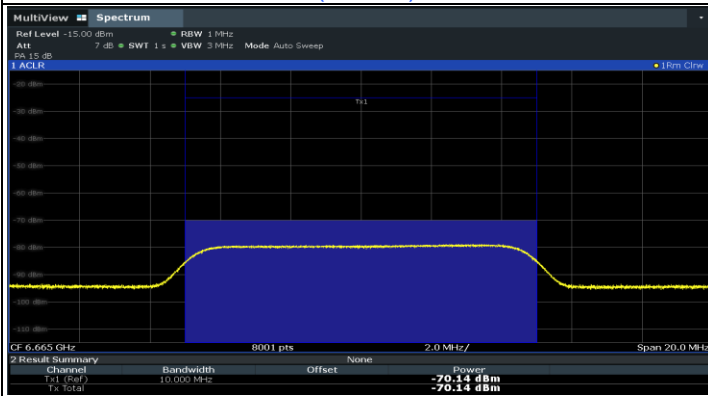


802.11be (EHT160) / CH143(Middle)

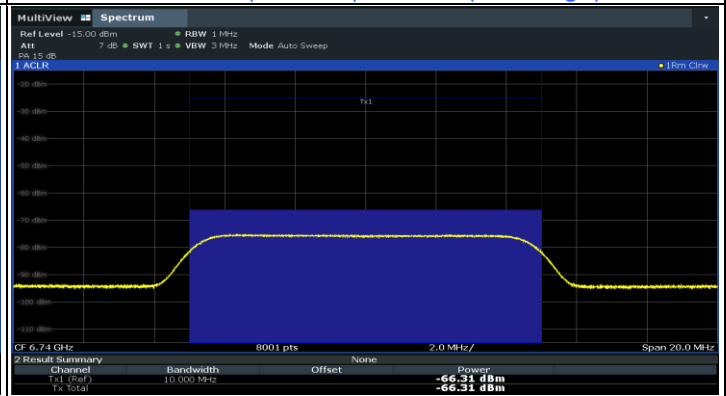

802.11be (EHT160) / CH143(High Edge)

### Plots of EUT ceased transmission in the time domain


#### UNII7\_20M\_6695\_Test Result

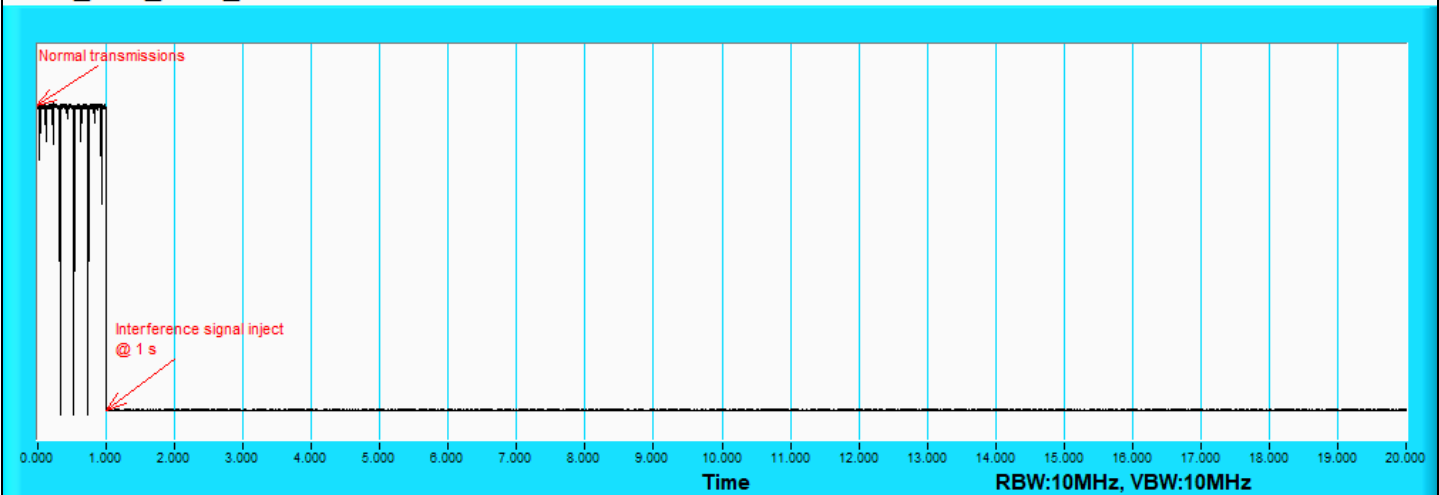

802.11be (EHT20) / CH149


Plots of EUT ceased transmission in the time domain

**UNII7\_160M\_6590\_Test Result**

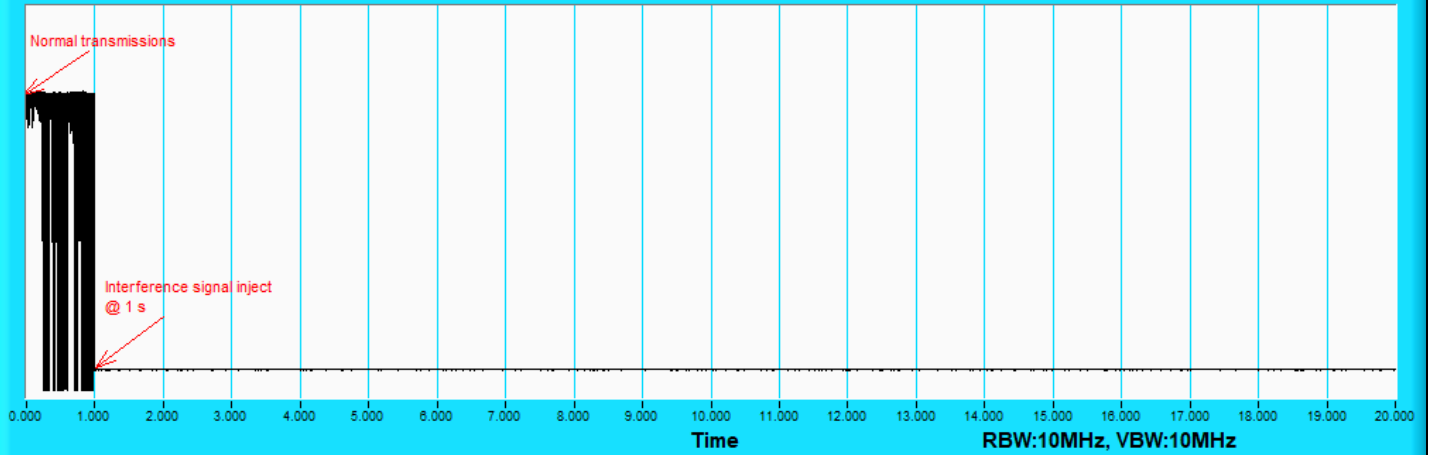


802.11be (EHT160) / CH143(Low Edge)

**UNII7\_160M\_6665\_Test Result**

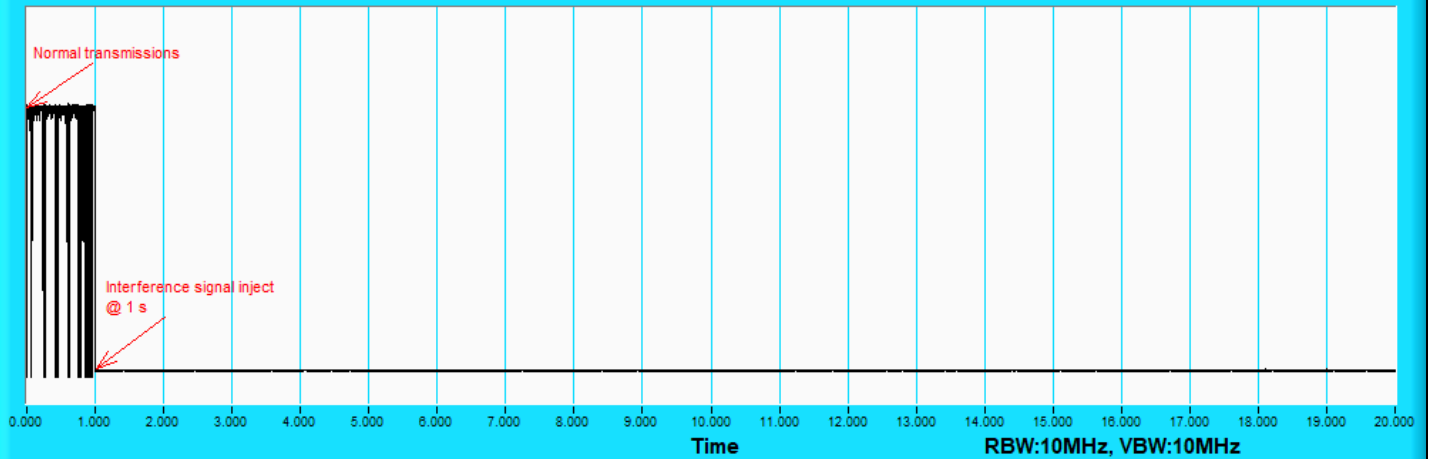

802.11be (EHT160) / CH143(Middle)

**UNII7\_160M\_6740\_Test Result**

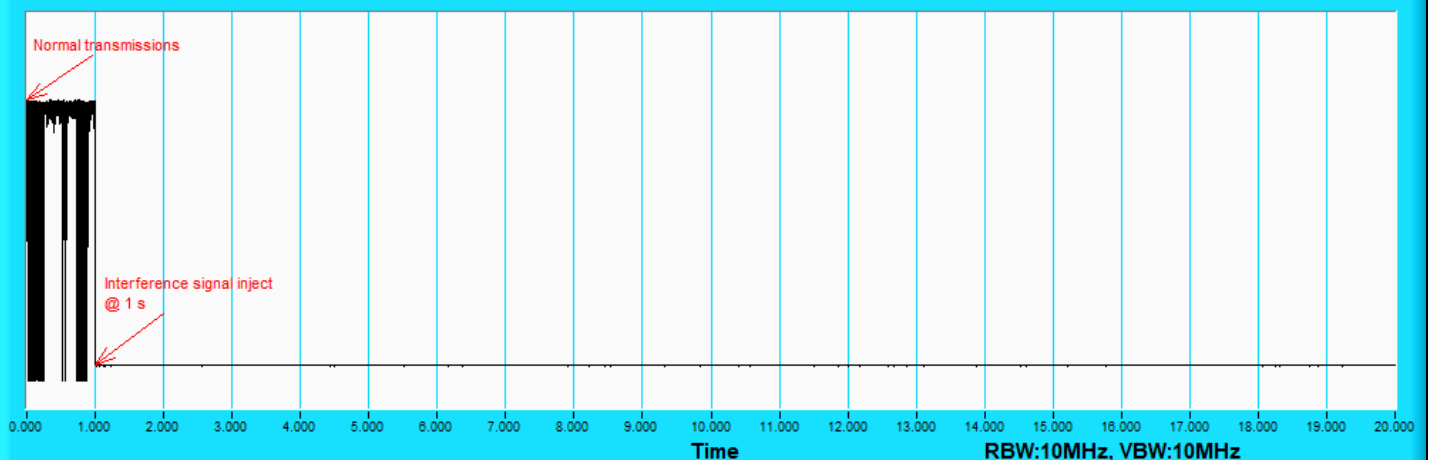

802.11be (EHT160) / CH143(High Edge)

For U-NII-8


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	213	7015	7015	-69.35	-2.28	0	-67.07	-62	OFF
					-69.85	-2.28	0	-67.57	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
	160	207	6985	6910	-66.36	-2.28	0	-64.08	-62	OFF
					-66.86	-2.28	0	-64.58	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
				7060	-66.28	-2.28	0	-64	-62	OFF
					-66.78	-2.28	0	-64.5	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
					-66.32	-2.28	0	-64.04	-62	OFF
					-66.82	-2.28	0	-64.54	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON

Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	7015	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6910	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6985	v	v	v	v	v	v	v	x	v	v	90%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

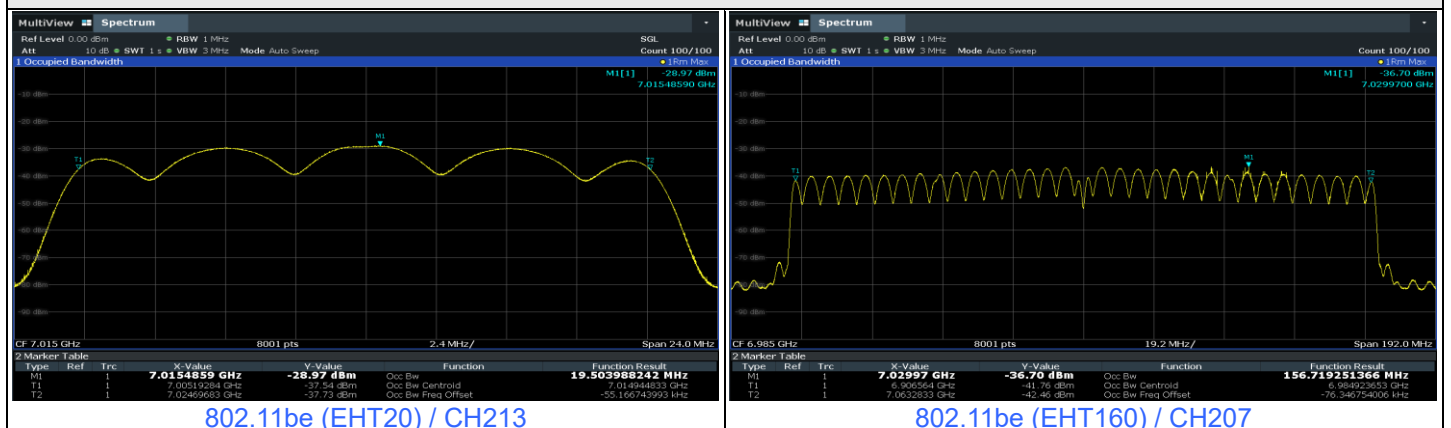





Plots of Injected signal (AWGN) level

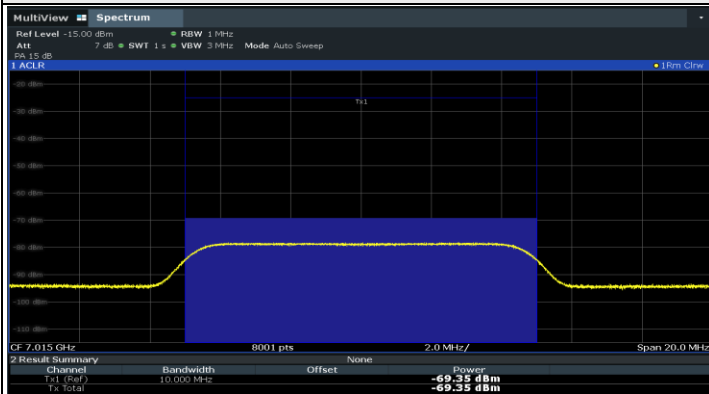


802.11be (EHT20) / CH213

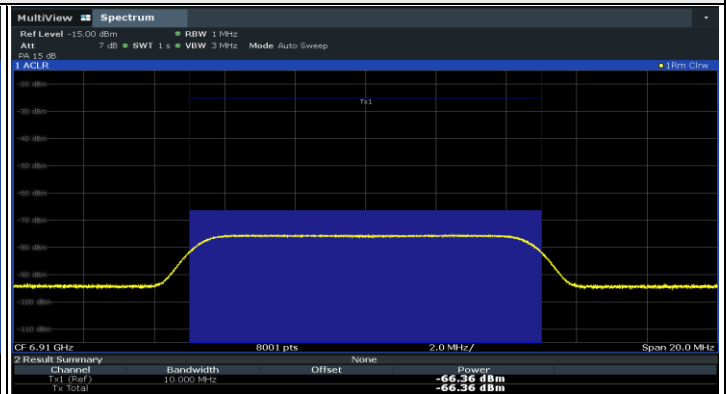

802.11be (EHT160) / CH207(Low Edge)

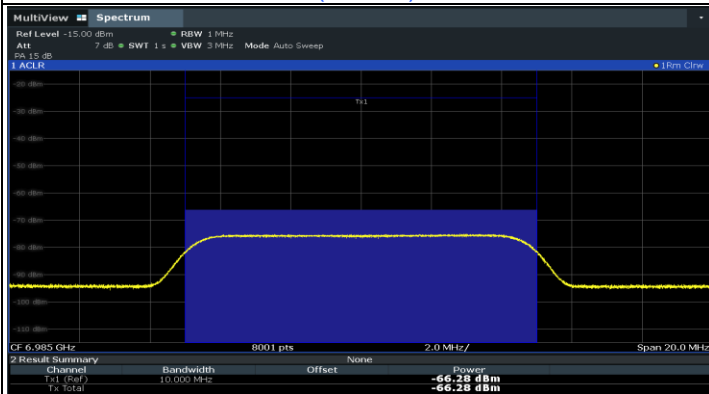


802.11be (EHT160) / CH207(Middle)

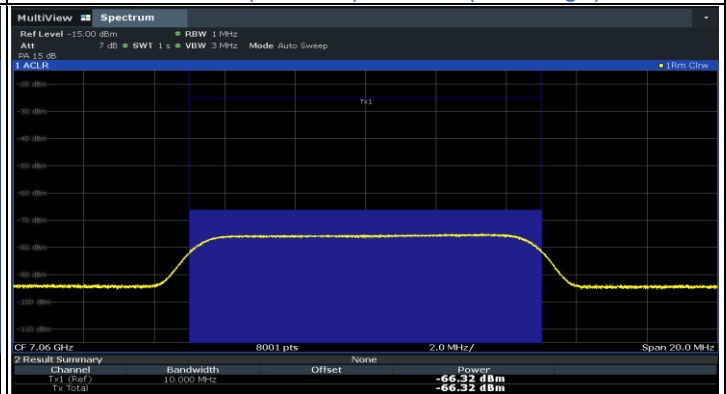

802.11be (EHT160) / CH207(High Edge)

Plots of EUT ceased transmission in the time domain


UNII8\_20M\_7015\_Test Result

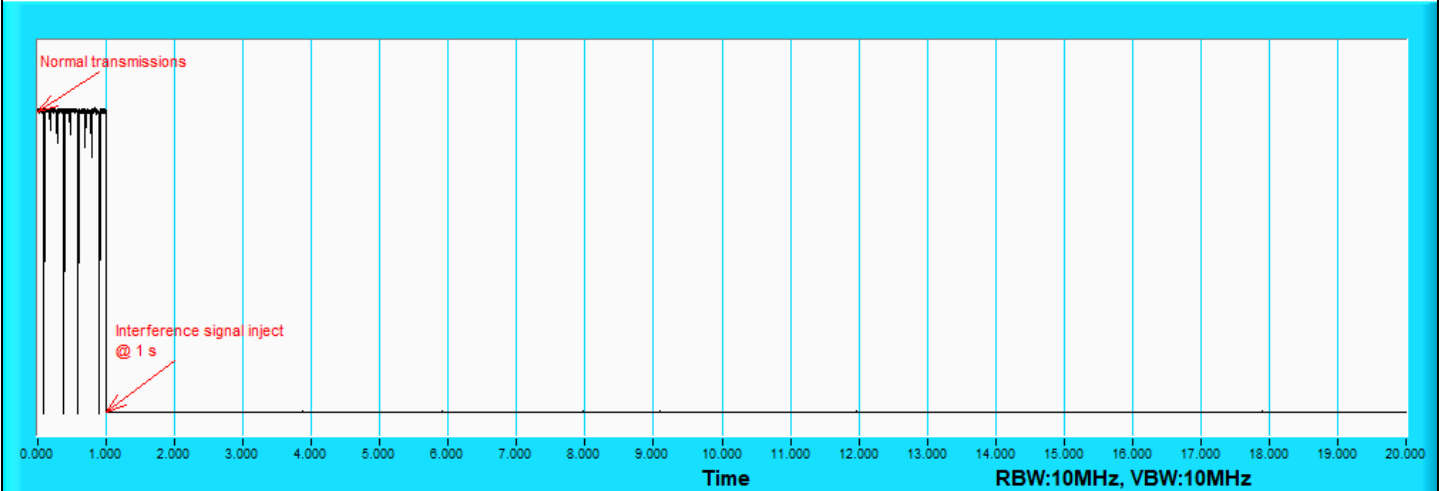

802.11be (EHT20) / CH213


Plots of EUT ceased transmission in the time domain

**UNII8\_160M\_6910\_Test Result**

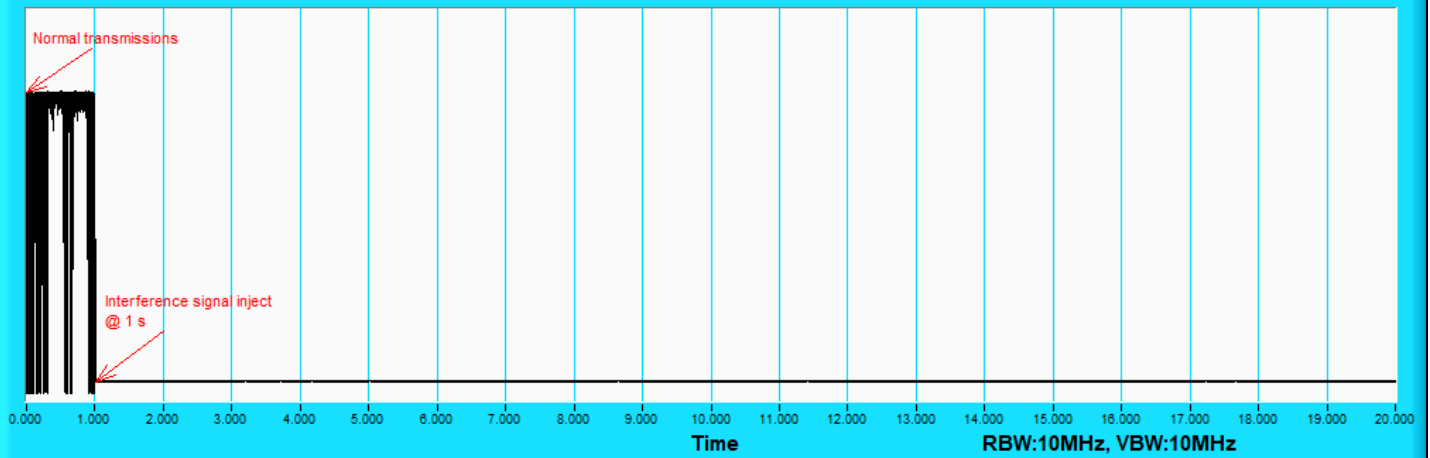


802.11be (EHT160) / CH207(Low Edge)

**UNII8\_160M\_6985\_Test Result**

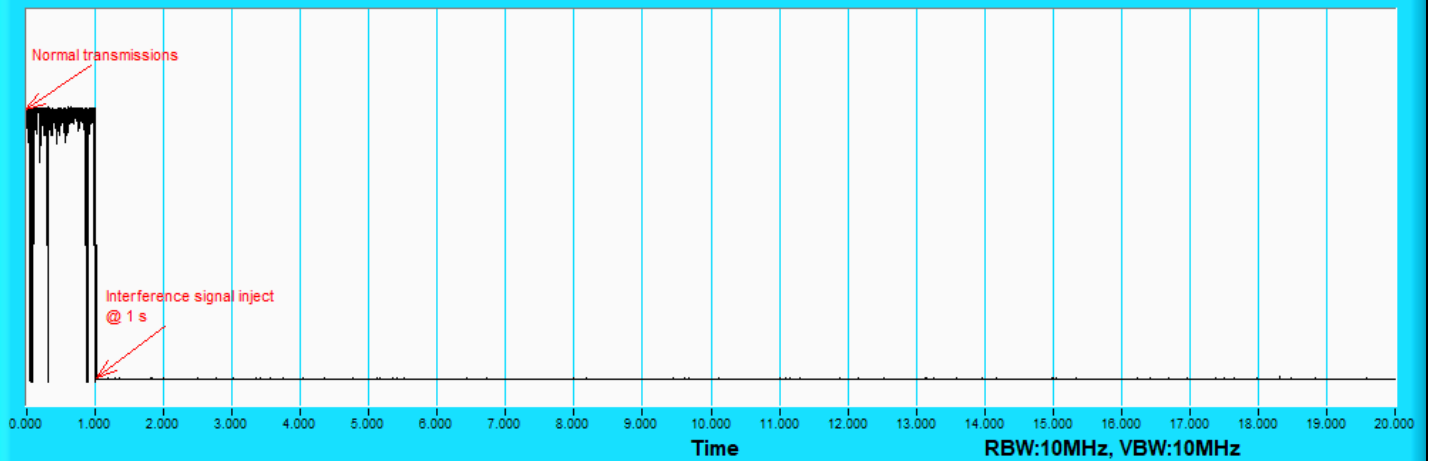

802.11be (EHT160) / CH207(Middle)

**UNII8\_160M\_7060\_Test Result**

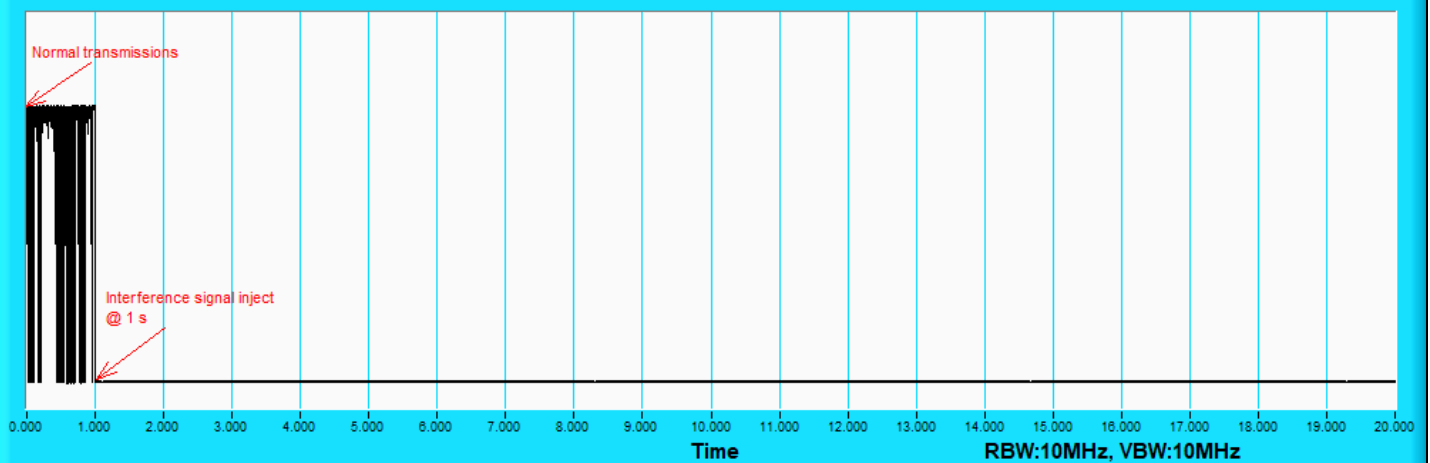

802.11be (EHT160) / CH207(High Edge)

## 7.8 AC Power Conducted Emissions


under control of low power indoor AP

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Rex Wang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15770	9.62	28.89	20.08	38.51	29.70	65.58	55.58	-27.07	-25.88
2	0.18180	9.63	26.59	19.85	36.22	29.48	64.40	54.40	-28.18	-24.92
3	0.38600	9.67	25.66	20.18	35.33	29.85	58.15	48.15	-22.82	-18.30
4	1.61400	9.70	23.24	19.26	32.94	28.96	56.00	46.00	-23.06	-17.04
5	8.25000	9.78	17.55	12.64	27.33	22.42	60.00	50.00	-32.67	-27.58
6	24.37800	9.76	12.73	8.16	22.49	17.92	60.00	50.00	-37.51	-32.08

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

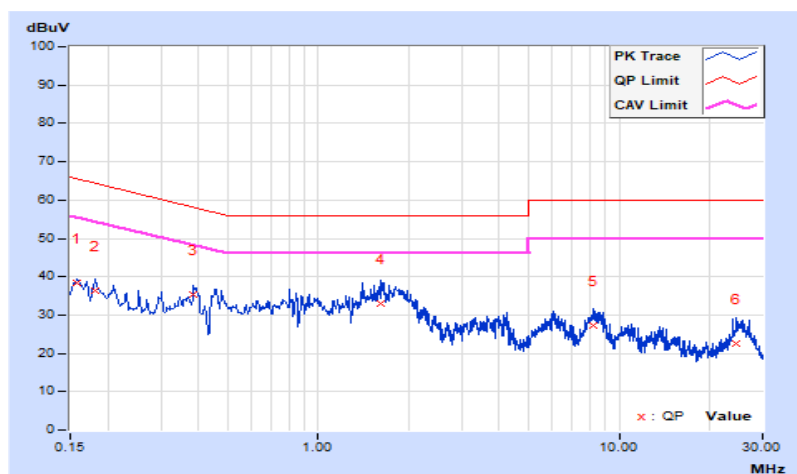


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Rex Wang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17000	9.63	25.56	15.23	35.19	24.86	64.96	54.96	-29.77	-30.10
2	0.25000	9.65	27.71	22.17	37.36	31.82	61.76	51.76	-24.40	-19.94
3	0.27786	9.65	27.85	21.97	37.50	31.62	60.88	50.88	-23.38	-19.26
<b>4</b>	<b>0.42353</b>	<b>9.67</b>	<b>28.74</b>	<b>28.40</b>	<b>38.41</b>	<b>38.07</b>	<b>57.38</b>	<b>47.38</b>	<b>-18.97</b>	<b>-9.31</b>
5	1.81000	9.72	24.38	20.21	34.10	29.93	56.00	46.00	-21.90	-16.07
6	7.34200	9.78	9.74	3.97	19.52	13.75	60.00	50.00	-40.48	-36.25

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

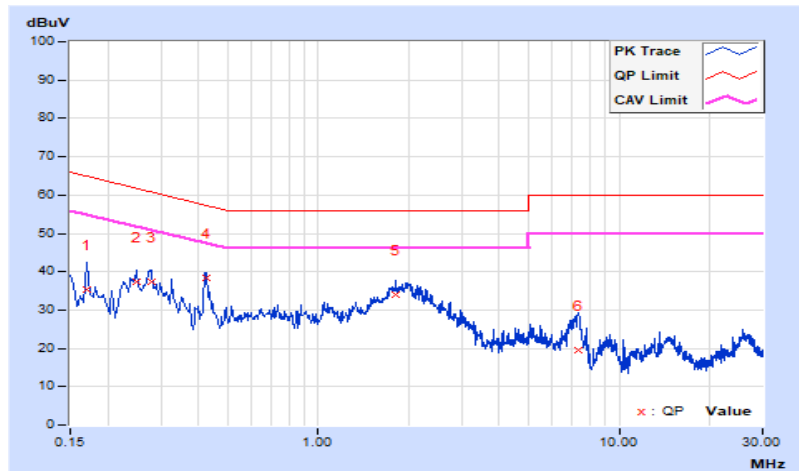


under control of standard power AP

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Rex Wang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15770	9.62	28.89	20.08	38.51	29.70	65.58	55.58	-27.07	-25.88
2	0.18180	9.63	26.59	19.85	36.22	29.48	64.40	54.40	-28.18	-24.92
3	0.38600	9.67	25.66	20.18	35.33	29.85	58.15	48.15	-22.82	-18.30
4	1.61400	9.70	23.24	19.26	32.94	28.96	56.00	46.00	-23.06	-17.04
5	8.25000	9.78	17.55	12.64	27.33	22.42	60.00	50.00	-32.67	-27.58
6	24.37800	9.76	12.73	8.16	22.49	17.92	60.00	50.00	-37.51	-32.08

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

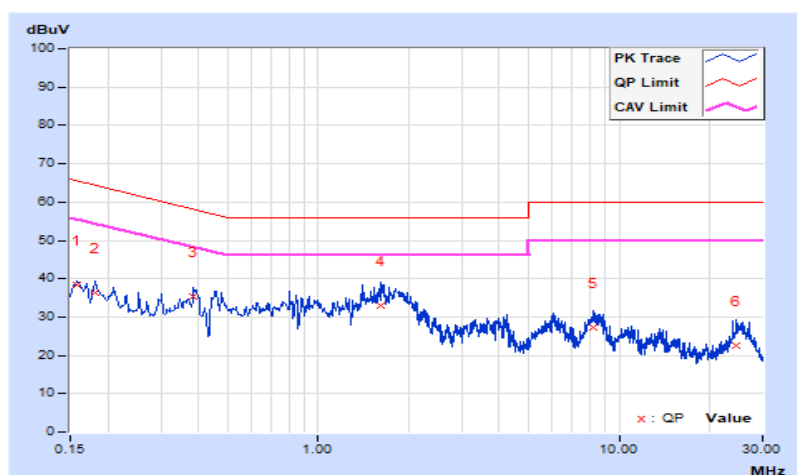


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Rex Wang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17000	9.63	25.56	15.23	35.19	24.86	64.96	54.96	-29.77	-30.10
2	0.25000	9.65	27.71	22.17	37.36	31.82	61.76	51.76	-24.40	-19.94
3	0.27786	9.65	27.85	21.97	37.50	31.62	60.88	50.88	-23.38	-19.26
<b>4</b>	<b>0.42353</b>	<b>9.67</b>	<b>28.74</b>	<b>28.40</b>	<b>38.41</b>	<b>38.07</b>	<b>57.38</b>	<b>47.38</b>	<b>-18.97</b>	<b>-9.31</b>
5	1.81000	9.72	24.38	20.21	34.10	29.93	56.00	46.00	-21.90	-16.07
6	7.34200	9.78	9.74	3.97	19.52	13.75	60.00	50.00	-40.48	-36.25

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

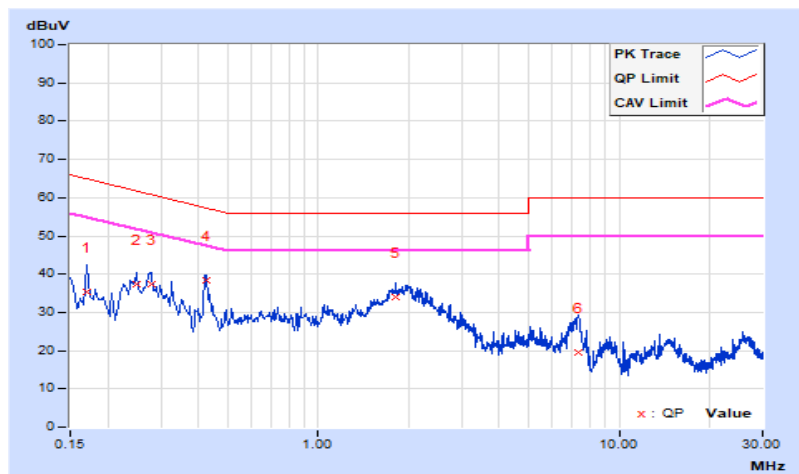

## 7.9 Unwanted Emissions below 1 GHz


under control of low power indoor AP

<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.97	29.3 QP	40.0	-10.7	1.25 H	84	43.9	-14.6
2	99.84	34.4 QP	43.5	-9.1	1.01 H	212	52.1	-17.7
3	198.78	37.2 QP	43.5	-6.3	1.25 H	67	54.0	-16.8
4	298.69	42.2 QP	46.0	-3.8	1.50 H	284	54.9	-12.7
5	398.60	38.2 QP	46.0	-7.8	1.01 H	171	48.5	-10.3
6	926.28	35.3 QP	46.0	-10.7	1.01 H	299	36.3	-1.0

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

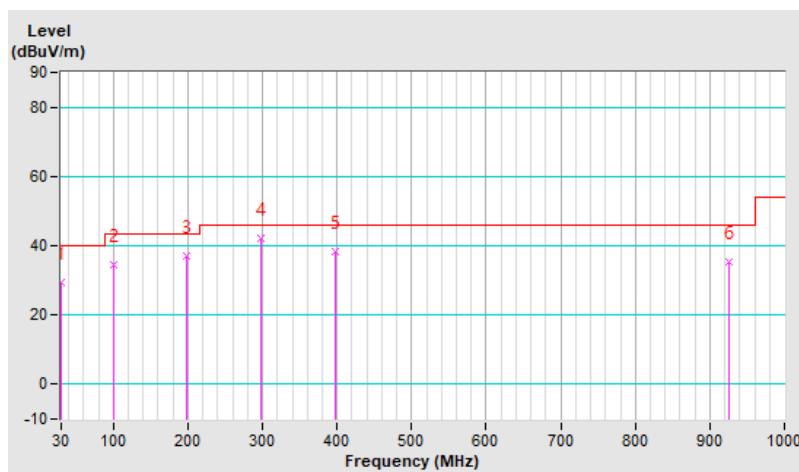


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.70	36.7 QP	40.0	-3.3	1.01 V	220	50.5	-13.8
2	64.92	34.1 QP	40.0	-5.9	1.01 V	2	49.0	-14.9
3	198.78	28.6 QP	43.5	-14.9	1.99 V	352	45.4	-16.8
4	299.66	34.3 QP	46.0	-11.7	1.49 V	181	47.0	-12.7
5	398.60	33.0 QP	46.0	-13.0	1.99 V	74	43.3	-10.3
6	499.48	33.9 QP	46.0	-12.1	1.01 V	270	41.8	-7.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

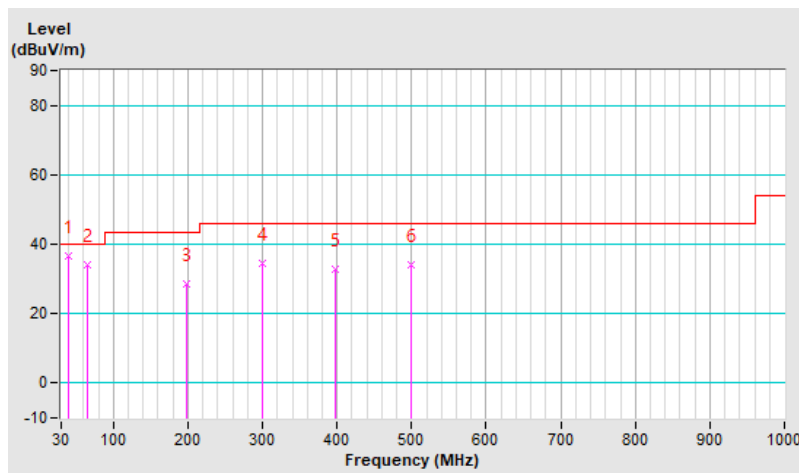



under control of standard power AP


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.97	31.4 QP	40.0	-8.6	1.25 H	119	46.0	-14.6
2	99.84	34.6 QP	43.5	-8.9	1.01 H	212	52.3	-17.7
3	199.75	37.2 QP	43.5	-6.3	1.50 H	64	54.1	-16.9
4	299.66	42.5 QP	46.0	-3.5	1.25 H	280	55.2	-12.7
5	398.60	38.7 QP	46.0	-7.3	1.01 H	170	49.0	-10.3
6	859.35	35.2 QP	46.0	-10.8	1.50 H	85	37.0	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

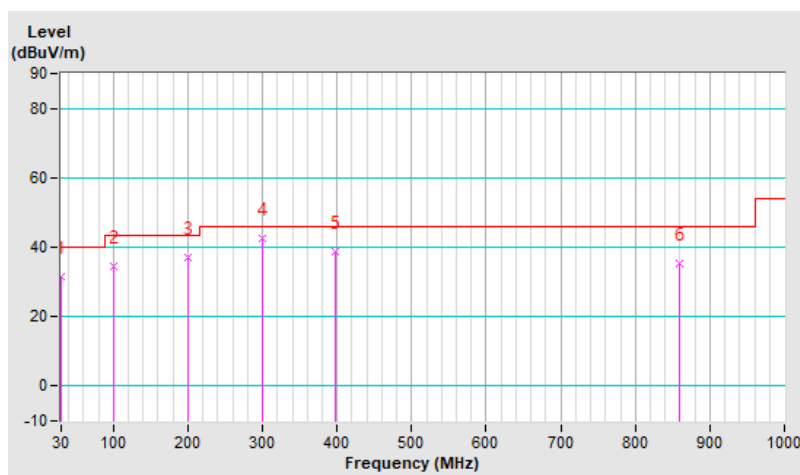


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.97	33.0 QP	40.0	-7.0	1.25 V	353	47.6	-14.6
2	64.92	32.2 QP	40.0	-7.8	1.01 V	46	47.1	-14.9
3	146.40	26.7 QP	43.5	-16.8	1.50 V	108	39.9	-13.2
4	298.69	33.8 QP	46.0	-12.2	1.25 V	15	46.5	-12.7
5	444.19	33.1 QP	46.0	-12.9	1.01 V	132	42.0	-8.9
6	601.33	32.3 QP	46.0	-13.7	1.25 V	351	37.9	-5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

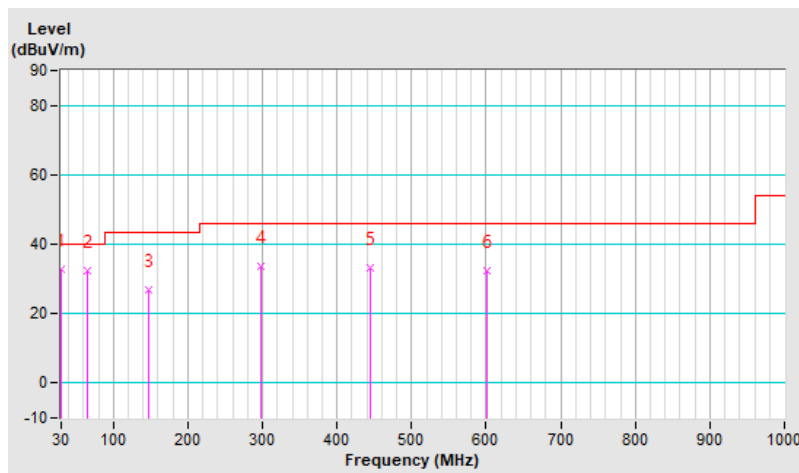

## 7.10 Unwanted Emissions above 1 GHz

under control of low power indoor AP

1TX

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.0 PK	88.2	-18.2	1.00 H	1	65.0	5.0
2	#5925.00	56.3 AV	68.2	-11.9	1.00 H	1	51.3	5.0
3	*5955.00	115.9 PK			1.00 H	1	73.3	42.6
4	*5955.00	106.8 AV			1.00 H	1	64.2	42.6
5	11910.00	55.7 PK	74.0	-18.3	2.75 H	322	47.2	8.5
6	11910.00	48.0 AV	54.0	-6.0	2.75 H	322	39.5	8.5

### Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.5 PK	88.2	-15.7	2.17 V	283	67.5	5.0
2	#5925.00	57.0 AV	68.2	-11.2	2.17 V	283	52.0	5.0
3	*5955.00	114.4 PK			2.17 V	283	71.8	42.6
4	*5955.00	105.4 AV			2.17 V	283	62.8	42.6
5	11910.00	54.0 PK	74.0	-20.0	1.65 V	202	45.5	8.5
6	11910.00	47.0 AV	54.0	-7.0	1.65 V	202	38.5	8.5

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 49 : 6195 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.9 PK			1.08 H	1	73.3	43.6
2	*6195.00	107.5 AV			1.08 H	1	63.9	43.6
3	12390.00	56.4 PK	74.0	-17.6	2.75 H	321	47.3	9.1
4	12390.00	48.5 AV	54.0	-5.5	2.75 H	321	39.4	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.9 PK			2.11 V	288	72.3	43.6
2	*6195.00	106.3 AV			2.11 V	288	62.7	43.6
3	#12930.00	55.3 PK	88.2	-32.9	1.69 V	206	45.7	9.6
4	#12930.00	48.2 AV	68.2	-20.0	1.69 V	206	38.6	9.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.1 PK			1.15 H	2	73.2	44.9
2	*6415.00	117.6 AV			1.15 H	2	72.7	44.9
3	#12830.00	56.7 PK	88.2	-31.5	2.78 H	325	47.0	9.7
4	#12830.00	48.9 AV	68.2	-19.3	2.78 H	325	39.2	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.4 PK			2.09 V	286	70.5	44.9
2	*6415.00	105.7 AV			2.09 V	286	60.8	44.9
3	#12830.00	55.3 PK	88.2	-32.9	1.77 V	205	45.6	9.7
4	#12830.00	48.1 AV	68.2	-20.1	1.77 V	205	38.4	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	117.1 PK			1.01 H	3	72.0	45.1
2	*6435.00	107.2 AV			1.01 H	3	62.1	45.1
3	#12870.00	57.2 PK	88.2	-31.0	2.78 H	325	47.5	9.7
4	#12870.00	49.1 AV	68.2	-19.1	2.78 H	325	39.4	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	115.7 PK			2.13 V	284	70.6	45.1
2	*6435.00	105.7 AV			2.13 V	284	60.6	45.1
3	#12870.00	55.4 PK	88.2	-32.8	1.59 V	209	45.7	9.7
4	#12870.00	48.2 AV	68.2	-20.0	1.59 V	209	38.5	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	117.3 PK			1.02 H	3	72.0	45.3
2	*6475.00	107.6 AV			1.02 H	3	62.3	45.3
3	#12950.00	56.5 PK	88.2	-31.7	2.79 H	326	47.0	9.5
4	#12950.00	48.7 AV	68.2	-19.5	2.79 H	326	39.2	9.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.4 PK			2.09 V	285	70.1	45.3
2	*6475.00	105.6 AV			2.09 V	285	60.3	45.3
3	#12950.00	55.1 PK	88.2	-33.1	1.68 V	204	45.6	9.5
4	#12950.00	48.1 AV	68.2	-20.1	1.68 V	204	38.6	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	117.0 PK			1.02 H	4	71.7	45.3
2	*6515.00	107.7 AV			1.02 H	4	62.4	45.3
3	#13030.00	56.3 PK	88.2	-31.9	2.78 H	326	47.0	9.3
4	#13030.00	48.5 AV	68.2	-19.7	2.78 H	326	39.2	9.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	116.2 PK			2.06 V	284	70.9	45.3
2	*6515.00	106.6 AV			2.06 V	284	61.3	45.3
3	#13030.00	54.9 PK	88.2	-33.3	1.62 V	205	45.6	9.3
4	#13030.00	47.7 AV	68.2	-20.5	1.62 V	205	38.4	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.6 PK			1.05 H	2	72.3	45.3
2	*6535.00	107.7 AV			1.05 H	2	62.4	45.3
3	#13070.00	56.7 PK	88.2	-31.5	2.75 H	325	47.3	9.4
4	#13070.00	48.8 AV	68.2	-19.4	2.75 H	325	39.4	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.5 PK			2.04 V	284	70.2	45.3
2	*6535.00	106.1 AV			2.04 V	284	60.8	45.3
3	#13070.00	55.1 PK	88.2	-33.1	1.69 V	205	45.7	9.4
4	#13070.00	48.0 AV	68.2	-20.2	1.69 V	205	38.6	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.8 PK			1.01 H	1	71.4	45.4
2	*6695.00	107.2 AV			1.01 H	1	61.8	45.4
3	13390.00	57.4 PK	74.0	-16.6	2.72 H	319	47.3	10.1
4	13390.00	49.7 AV	54.0	-4.3	2.72 H	319	39.6	10.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.0 PK			2.01 V	284	70.6	45.4
2	*6695.00	105.9 AV			2.01 V	284	60.5	45.4
3	13390.00	55.6 PK	74.0	-18.4	1.62 V	201	45.5	10.1
4	13390.00	48.5 AV	54.0	-5.5	1.62 V	201	38.4	10.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.5 PK			1.02 H	0	71.0	45.5
2	*6855.00	107.4 AV			1.02 H	0	61.9	45.5
3	#13710.00	56.4 PK	88.2	-31.8	2.72 H	326	47.0	9.4
4	#13710.00	48.7 AV	68.2	-19.5	2.72 H	326	39.3	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.0 PK			1.98 V	285	70.5	45.5
2	*6855.00	106.1 AV			1.98 V	285	60.6	45.5
3	#13710.00	55.0 PK	88.2	-33.2	1.66 V	206	45.6	9.4
4	#13710.00	47.9 AV	68.2	-20.3	1.66 V	206	38.5	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	116.5 PK			1.01 H	1	71.0	45.5
2	*6875.00	107.3 AV			1.01 H	1	61.8	45.5
3	#13750.00	56.3 PK	88.2	-31.9	2.74 H	321	47.0	9.3
4	#13750.00	48.6 AV	68.2	-19.6	2.74 H	321	39.3	9.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	115.4 PK			1.98 V	289	69.9	45.5
2	*6875.00	105.9 AV			1.98 V	289	60.4	45.5
3	#13750.00	54.9 PK	88.2	-33.3	1.59 V	201	45.6	9.3
4	#13750.00	47.7 AV	68.2	-20.5	1.59 V	201	38.4	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	116.3 PK			1.01 H	1	70.7	45.6
2	*6995.00	106.4 AV			1.01 H	1	60.8	45.6
3	13390.00	57.4 PK	74.0	-16.6	2.75 H	325	47.3	10.1
4	13390.00	49.6 AV	54.0	-4.4	2.75 H	325	39.5	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	115.8 PK			2.06 V	288	70.2	45.6
2	*6995.00	105.8 AV			2.06 V	288	60.2	45.6
3	#13990.00	55.4 PK	88.2	-32.8	1.69 V	205	45.5	9.9
4	#13990.00	48.2 AV	68.2	-20.0	1.69 V	205	38.3	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	113.3 PK			1.02 H	9	67.5	45.8
2	*7115.00	103.4 AV			1.02 H	9	57.6	45.8
3	#7125.00	85.7 PK	88.2	-2.5	1.02 H	9	77.8	7.9
4	#7125.00	66.5 AV	68.2	-1.7	1.02 H	9	58.6	7.9
5	#14230.00	56.9 PK	88.2	-31.3	2.77 H	325	47.0	9.9
6	#14230.00	48.8 AV	68.2	-19.4	2.77 H	325	38.9	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	112.5 PK			1.94 V	288	66.7	45.8
2	*7115.00	102.6 AV			1.94 V	288	56.8	45.8
3	#7125.00	80.8 PK	88.2	-7.4	1.94 V	288	72.9	7.9
4	#7125.00	61.7 AV	68.2	-6.5	1.94 V	288	53.8	7.9
5	#14230.00	55.3 PK	88.2	-32.9	1.65 V	202	45.4	9.9
6	#14230.00	48.1 AV	68.2	-20.1	1.65 V	202	38.2	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	86.7 PK	88.2	-1.5	1.00 H	1	81.7	5.0
2	#5925.00	53.2 AV	68.2	-15.0	1.00 H	1	48.2	5.0
3	*5955.00	112.6 PK			1.01 H	1	70.0	42.6
4	*5955.00	100.9 AV			1.01 H	1	58.3	42.6
5	11910.00	55.8 PK	74.0	-18.2	2.79 H	329	47.3	8.5
6	11910.00	48.1 AV	54.0	-5.9	2.79 H	329	39.6	8.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	85.3 PK	88.2	-2.9	2.11 V	287	80.3	5.0
2	#5925.00	53.0 AV	68.2	-15.2	2.11 V	287	48.0	5.0
3	*5955.00	111.1 PK			2.11 V	287	68.5	42.6
4	*5955.00	99.2 AV			2.11 V	287	56.6	42.6
5	11910.00	53.9 PK	74.0	-20.1	1.69 V	205	45.4	8.5
6	11910.00	47.1 AV	54.0	-6.9	1.69 V	205	38.6	8.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 49 : 6195 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	117.8 PK			1.02 H	1	74.2	43.6
2	*6195.00	106.1 AV			1.02 H	1	62.5	43.6
3	12390.00	56.2 PK	74.0	-17.8	2.73 H	318	47.1	9.1
4	12390.00	48.5 AV	54.0	-5.5	2.73 H	318	39.4	9.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.6 PK			2.04 V	286	73.0	43.6
2	*6195.00	104.3 AV			2.04 V	286	60.7	43.6
3	12390.00	54.6 PK	74.0	-19.4	1.65 V	202	45.5	9.1
4	12390.00	47.6 AV	54.0	-6.4	1.65 V	202	38.5	9.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.





<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.4 PK			1.04 H	1	71.5	44.9
2	*6415.00	105.7 AV			1.04 H	1	60.8	44.9
3	#12830.00	56.7 PK	88.2	-31.5	2.76 H	324	47.0	9.7
4	#12830.00	49.0 AV	68.2	-19.2	2.76 H	324	39.3	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.1 PK			2.11 V	284	70.2	44.9
2	*6415.00	104.0 AV			2.11 V	284	59.1	44.9
3	#12830.00	55.3 PK	88.2	-32.9	1.75 V	203	45.6	9.7
4	#12830.00	48.3 AV	68.2	-19.9	1.75 V	203	38.6	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	117.0 PK			1.05 H	1	71.9	45.1
2	*6435.00	105.8 AV			1.05 H	1	60.7	45.1
3	#12870.00	56.8 PK	88.2	-31.4	2.75 H	323	47.1	9.7
4	#12870.00	49.0 AV	68.2	-19.2	2.75 H	323	39.3	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	115.8 PK			2.12 V	283	70.7	45.1
2	*6435.00	104.1 AV			2.12 V	283	59.0	45.1
3	#12870.00	55.3 PK	88.2	-32.9	1.55 V	205	45.6	9.7
4	#12870.00	48.2 AV	68.2	-20.0	1.55 V	205	38.5	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	117.3 PK			1.02 H	2	72.0	45.3
2	*6475.00	106.1 AV			1.02 H	2	60.8	45.3
3	#12950.00	56.5 PK	88.2	-31.7	2.72 H	325	47.0	9.5
4	#12950.00	48.7 AV	68.2	-19.5	2.72 H	325	39.2	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.7 PK			2.06 V	285	70.4	45.3
2	*6475.00	104.4 AV			2.06 V	285	59.1	45.3
3	#12950.00	55.1 PK	88.2	-33.1	1.65 V	209	45.6	9.5
4	#12950.00	47.9 AV	68.2	-20.3	1.65 V	209	38.4	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	117.6 PK			1.00 H	1	72.3	45.3
2	*6515.00	106.3 AV			1.00 H	1	61.0	45.3
3	#13030.00	56.3 PK	88.2	-31.9	2.69 H	319	47.0	9.3
4	#13030.00	48.6 AV	68.2	-19.6	2.69 H	319	39.3	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	116.4 PK			2.06 V	285	71.1	45.3
2	*6515.00	105.2 AV			2.06 V	285	59.9	45.3
3	#13030.00	54.8 PK	88.2	-33.4	1.65 V	205	45.5	9.3
4	#13030.00	47.8 AV	68.2	-20.4	1.65 V	205	38.5	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.7 PK			1.05 H	4	72.4	45.3
2	*6535.00	105.5 AV			1.05 H	4	60.2	45.3
3	#13070.00	56.4 PK	88.2	-31.8	2.75 H	325	47.0	9.4
4	#13070.00	48.6 AV	68.2	-19.6	2.75 H	325	39.2	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.1 PK			2.04 V	284	70.8	45.3
2	*6535.00	104.2 AV			2.04 V	284	58.9	45.3
3	#13070.00	54.9 PK	88.2	-33.3	1.68 V	202	45.5	9.4
4	#13070.00	48.0 AV	68.2	-20.2	1.68 V	202	38.6	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.2 PK			1.05 H	2	72.8	45.4
2	*6695.00	106.6 AV			1.05 H	2	61.2	45.4
3	13390.00	57.2 PK	74.0	-16.8	2.72 H	325	47.1	10.1
4	13390.00	49.4 AV	54.0	-4.6	2.72 H	325	39.3	10.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.7 PK			2.00 V	284	71.3	45.4
2	*6695.00	105.1 AV			2.00 V	284	59.7	45.4
3	13390.00	55.6 PK	74.0	-18.4	1.65 V	208	45.5	10.1
4	13390.00	48.4 AV	54.0	-5.6	1.65 V	208	38.3	10.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.7 PK			1.05 H	1	72.2	45.5
2	*6855.00	106.2 AV			1.05 H	1	60.7	45.5
3	#13710.00	56.4 PK	88.2	-31.8	2.72 H	319	47.0	9.4
4	#13710.00	48.7 AV	68.2	-19.5	2.72 H	319	39.3	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.7 PK			2.04 V	282	71.2	45.5
2	*6855.00	105.0 AV			2.04 V	282	59.5	45.5
3	#13710.00	55.1 PK	88.2	-33.1	1.65 V	202	45.7	9.4
4	#13710.00	47.9 AV	68.2	-20.3	1.65 V	202	38.5	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	117.9 PK			1.10 H	2	72.4	45.5
2	*6875.00	106.7 AV			1.10 H	2	61.2	45.5
3	#13750.00	56.4 PK	88.2	-31.8	2.73 H	321	47.1	9.3
4	#13750.00	48.7 AV	68.2	-19.5	2.73 H	321	39.4	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	116.7 PK			2.02 V	284	71.2	45.5
2	*6875.00	104.9 AV			2.02 V	284	59.4	45.5
3	#13750.00	54.9 PK	88.2	-33.3	1.55 V	208	45.6	9.3
4	#13750.00	47.7 AV	68.2	-20.5	1.55 V	208	38.4	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	118.5 PK			1.04 H	2	72.9	45.6
2	*6995.00	106.7 AV			1.04 H	2	61.1	45.6
3	#13990.00	56.9 PK	88.2	-31.3	2.74 H	321	47.0	9.9
4	#13990.00	49.1 AV	68.2	-19.1	2.74 H	321	39.2	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	116.9 PK			1.98 V	282	71.3	45.6
2	*6995.00	104.8 AV			1.98 V	282	59.2	45.6
3	#13990.00	55.4 PK	88.2	-32.8	1.62 V	207	45.5	9.9
4	#13990.00	48.1 AV	68.2	-20.1	1.62 V	207	38.2	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	110.5 PK			2.32 H	9	64.7	45.8
2	*7115.00	97.7 AV			2.32 H	9	51.9	45.8
3	#7125.00	76.6 PK	88.2	-11.6	2.30 H	9	68.7	7.9
4	#7125.00	66.3 AV	68.2	-1.9	2.30 H	9	58.4	7.9
5	#14230.00	57.4 PK	88.2	-30.8	2.29 H	323	47.5	9.9
6	#14230.00	49.2 AV	68.2	-19.0	2.29 H	323	39.3	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	109.9 PK			2.03 V	285	64.1	45.8
2	*7115.00	97.1 AV			2.03 V	285	51.3	45.8
3	#7125.00	76.0 PK	88.2	-12.2	2.03 V	285	68.1	7.9
4	#7125.00	65.4 AV	68.2	-2.8	2.03 V	285	57.5	7.9
5	#14230.00	56.5 PK	88.2	-31.7	1.16 V	357	46.6	9.9
6	#14230.00	48.0 AV	68.2	-20.2	1.16 V	357	38.1	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 3 : 5965 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	86.5 PK	88.2	-1.7	1.06 H	1	81.5	5.0
2	#5925.00	64.7 AV	68.2	-3.5	1.06 H	1	59.7	5.0
3	*5965.00	108.5 PK			1.06 H	1	65.9	42.6
4	*5965.00	97.4 AV			1.06 H	1	54.8	42.6
5	11930.00	55.6 PK	74.0	-18.4	2.75 H	335	47.1	8.5
6	11930.00	47.5 AV	54.0	-6.5	2.75 H	335	39.0	8.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.5 PK	88.2	-3.7	2.11 V	288	79.5	5.0
2	#5925.00	61.0 AV	68.2	-7.2	2.11 V	288	56.0	5.0
3	*5965.00	107.3 PK			2.11 V	288	64.7	42.6
4	*5965.00	96.1 AV			2.11 V	288	53.5	42.6
5	11930.00	53.5 PK	74.0	-20.5	1.75 V	211	45.0	8.5
6	11930.00	46.7 AV	54.0	-7.3	1.75 V	211	38.2	8.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 51 : 6205 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	116.0 PK			1.02 H	1	72.3	43.7
2	*6205.00	102.7 AV			1.02 H	1	59.0	43.7
3	12410.00	56.2 PK	74.0	-17.8	2.79 H	321	47.0	9.2
4	12410.00	48.4 AV	54.0	-5.6	2.79 H	321	39.2	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.3 PK			2.09 V	287	70.6	43.7
2	*6205.00	101.1 AV			2.09 V	287	57.4	43.7
3	12410.00	54.3 PK	74.0	-19.7	1.77 V	213	45.1	9.2
4	12410.00	47.5 AV	54.0	-6.5	1.77 V	213	38.3	9.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 91 : 6405 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	116.0 PK			1.09 H	6	71.2	44.8
2	*6405.00	103.0 AV			1.09 H	6	58.2	44.8
3	#12810.00	56.8 PK	88.2	-31.4	2.78 H	325	47.0	9.8
4	#12810.00	48.8 AV	68.2	-19.4	2.78 H	325	39.0	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	113.2 PK			2.03 V	286	68.4	44.8
2	*6405.00	101.4 AV			2.03 V	286	56.6	44.8
3	#12810.00	54.9 PK	88.2	-33.3	1.77 V	221	45.1	9.8
4	#12810.00	48.0 AV	68.2	-20.2	1.77 V	221	38.2	9.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 99 : 6445 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	116.1 PK			1.06 H	2	71.0	45.1
2	*6445.00	103.4 AV			1.06 H	2	58.3	45.1
3	#12890.00	56.6 PK	88.2	-31.6	2.75 H	321	46.9	9.7
4	#12890.00	48.5 AV	68.2	-19.7	2.75 H	321	38.8	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	114.0 PK			2.10 V	284	68.9	45.1
2	*6445.00	101.6 AV			2.10 V	284	56.5	45.1
3	#12890.00	54.9 PK	88.2	-33.3	1.72 V	208	45.2	9.7
4	#12890.00	47.8 AV	68.2	-20.4	1.72 V	208	38.1	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 107 : 6485 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	116.2 PK			1.09 H	5	70.9	45.3
2	*6485.00	103.6 AV			1.09 H	5	58.3	45.3
3	#12970.00	56.4 PK	88.2	-31.8	2.71 H	316	47.0	9.4
4	#12970.00	48.4 AV	68.2	-19.8	2.71 H	316	39.0	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	113.9 PK			2.13 V	283	68.6	45.3
2	*6485.00	101.6 AV			2.13 V	283	56.3	45.3
3	#12970.00	54.5 PK	88.2	-33.7	1.77 V	213	45.1	9.4
4	#12970.00	47.7 AV	68.2	-20.5	1.77 V	213	38.3	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 115 : 6525 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	116.3 PK			1.05 H	3	71.0	45.3
2	*6525.00	103.5 AV			1.05 H	3	58.2	45.3
3	#13050.00	56.3 PK	88.2	-31.9	2.68 H	318	47.0	9.3
4	#13050.00	48.2 AV	68.2	-20.0	2.68 H	318	38.9	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	115.0 PK			2.07 V	284	69.7	45.3
2	*6525.00	101.7 AV			2.07 V	284	56.4	45.3
3	#13050.00	54.5 PK	88.2	-33.7	1.74 V	207	45.2	9.3
4	#13050.00	47.4 AV	68.2	-20.8	1.74 V	207	38.1	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 123 : 6565 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	116.4 PK			1.02 H	2	71.2	45.2
2	*6565.00	103.7 AV			1.02 H	2	58.5	45.2
3	#13130.00	56.7 PK	88.2	-31.5	2.75 H	321	47.1	9.6
4	#13130.00	48.8 AV	68.2	-19.4	2.75 H	321	39.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.7 PK			2.08 V	284	69.5	45.2
2	*6565.00	101.9 AV			2.08 V	284	56.7	45.2
3	#13130.00	54.8 PK	88.2	-33.4	1.82 V	208	45.2	9.6
4	#13130.00	47.6 AV	68.2	-20.6	1.82 V	208	38.0	9.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 147 : 6685 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	116.4 PK			1.03 H	1	71.0	45.4
2	*6685.00	104.3 AV			1.03 H	1	58.9	45.4
3	13370.00	57.0 PK	74.0	-17.0	2.78 H	328	47.0	10.0
4	13370.00	49.1 AV	54.0	-4.9	2.78 H	328	39.1	10.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	113.9 PK			1.98 V	283	68.5	45.4
2	*6685.00	102.0 AV			1.98 V	283	56.6	45.4
3	13370.00	55.0 PK	74.0	-19.0	1.68 V	208	45.0	10.0
4	13370.00	48.1 AV	54.0	-5.9	1.68 V	208	38.1	10.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 179 : 6845 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	116.5 PK			1.03 H	3	71.0	45.5
2	*6845.00	103.7 AV			1.03 H	3	58.2	45.5
3	#13690.00	56.4 PK	88.2	-31.8	2.75 H	319	47.0	9.4
4	#13690.00	48.3 AV	68.2	-19.9	2.75 H	319	38.9	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.5 PK			1.96 V	284	69.0	45.5
2	*6845.00	102.3 AV			1.96 V	284	56.8	45.5
3	#13690.00	54.6 PK	88.2	-33.6	1.72 V	215	45.2	9.4
4	#13690.00	47.7 AV	68.2	-20.5	1.72 V	215	38.3	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 187 : 6885 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	115.6 PK			1.11 H	3	70.1	45.5
2	*6885.00	104.0 AV			1.11 H	3	58.5	45.5
3	#13770.00	56.2 PK	88.2	-32.0	2.73 H	319	46.8	9.4
4	#13770.00	48.2 AV	68.2	-20.0	2.73 H	319	38.8	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	114.3 PK			1.98 V	286	68.8	45.5
2	*6885.00	102.1 AV			1.98 V	286	56.6	45.5
3	#13770.00	54.5 PK	88.2	-33.7	1.75 V	212	45.1	9.4
4	#13770.00	47.5 AV	68.2	-20.7	1.75 V	212	38.1	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 203 : 6965 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	116.7 PK			1.26 H	7	71.1	45.6
2	*6965.00	104.7 AV			1.26 H	7	59.1	45.6
3	#13930.00	56.6 PK	88.2	-31.6	2.75 H	323	47.0	9.6
4	#13930.00	48.6 AV	68.2	-19.6	2.75 H	323	39.0	9.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	114.1 PK			1.95 V	283	68.5	45.6
2	*6965.00	102.6 AV			1.95 V	283	57.0	45.6
3	#13930.00	54.6 PK	88.2	-33.6	1.76 V	213	45.0	9.6
4	#13930.00	47.7 AV	68.2	-20.5	1.76 V	213	38.1	9.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 227 : 7085 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	116.2 PK			1.13 H	6	70.3	45.9
2	*7085.00	103.1 AV			1.13 H	6	57.2	45.9
3	#7125.00	86.4 PK	88.2	-1.8	1.13 H	6	78.5	7.9
4	#7125.00	62.1 AV	68.2	-6.1	1.13 H	6	54.2	7.9
5	#14170.00	56.7 PK	88.2	-31.5	2.75 H	316	46.9	9.8
6	#14170.00	48.7 AV	68.2	-19.5	2.75 H	316	38.9	9.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	113.9 PK			1.91 V	282	68.0	45.9
2	*7085.00	101.3 AV			1.91 V	282	55.4	45.9
3	#7125.00	81.0 PK	88.2	-7.2	1.91 V	282	73.1	7.9
4	#7125.00	59.0 AV	68.2	-9.2	1.91 V	282	51.1	7.9
5	#14170.00	54.6 PK	88.2	-33.6	1.76 V	213	44.8	9.8
6	#14170.00	47.8 AV	68.2	-20.4	1.76 V	213	38.0	9.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 7 : 5985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.6 PK	88.2	-3.6	1.03 H	3	79.6	5.0
2	#5925.00	66.6 AV	68.2	-1.6	1.03 H	3	61.6	5.0
3	*5985.00	108.0 PK			1.03 H	3	65.4	42.6
4	*5985.00	95.7 AV			1.03 H	3	53.1	42.6
5	11970.00	55.6 PK	74.0	-18.4	2.68 H	332	47.0	8.6
6	11970.00	47.4 AV	54.0	-6.6	2.68 H	332	38.8	8.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.3 PK	88.2	-3.9	1.98 V	299	79.3	5.0
2	#5925.00	66.4 AV	68.2	-1.8	1.98 V	299	61.4	5.0
3	*5985.00	106.9 PK			1.98 V	299	64.3	42.6
4	*5985.00	94.1 AV			1.98 V	299	51.5	42.6
5	11970.00	53.4 PK	74.0	-20.6	1.78 V	219	44.8	8.6
6	11970.00	46.1 AV	54.0	-7.9	1.78 V	219	37.5	8.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 55 : 6225 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	114.0 PK			1.00 H	1	70.2	43.8
2	*6225.00	101.0 AV			1.00 H	1	57.2	43.8
3	12450.00	56.1 PK	74.0	-17.9	2.68 H	318	46.9	9.2
4	12450.00	47.9 AV	54.0	-6.1	2.68 H	318	38.7	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.6 PK			2.06 V	284	68.8	43.8
2	*6225.00	99.7 AV			2.06 V	284	55.9	43.8
3	12450.00	53.9 PK	74.0	-20.1	1.82 V	221	44.7	9.2
4	12450.00	46.9 AV	54.0	-7.1	1.82 V	221	37.7	9.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.





<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	114.4 PK			1.01 H	1	69.7	44.7
2	*6385.00	101.5 AV			1.01 H	1	56.8	44.7
3	#12770.00	56.8 PK	88.2	-31.4	2.68 H	325	47.1	9.7
4	#12770.00	48.8 AV	68.2	-19.4	2.68 H	325	39.1	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	113.5 PK			2.06 V	285	68.8	44.7
2	*6385.00	99.9 AV			2.06 V	285	55.2	44.7
3	#12770.00	54.5 PK	88.2	-33.7	1.85 V	223	44.8	9.7
4	#12770.00	47.5 AV	68.2	-20.7	1.85 V	223	37.8	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	114.1 PK			1.14 H	1	68.9	45.2
2	*6465.00	101.2 AV			1.14 H	1	56.0	45.2
3	#12930.00	56.6 PK	88.2	-31.6	2.72 H	318	47.0	9.6
4	#12930.00	48.3 AV	68.2	-19.9	2.72 H	318	38.7	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	113.1 PK			2.10 V	284	67.9	45.2
2	*6465.00	99.8 AV			2.10 V	284	54.6	45.2
3	#12930.00	54.3 PK	88.2	-33.9	1.77 V	225	44.7	9.6
4	#12930.00	47.2 AV	68.2	-21.0	1.77 V	225	37.6	9.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 119 : 6545 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	114.3 PK			1.08 H	2	69.0	45.3
2	*6545.00	101.6 AV			1.08 H	2	56.3	45.3
3	#13090.00	56.5 PK	88.2	-31.7	2.68 H	319	47.0	9.5
4	#13090.00	48.3 AV	68.2	-19.9	2.68 H	319	38.8	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	113.2 PK			2.10 V	284	67.9	45.3
2	*6545.00	100.3 AV			2.10 V	284	55.0	45.3
3	#13090.00	54.2 PK	88.2	-34.0	1.75 V	222	44.7	9.5
4	#13090.00	47.2 AV	68.2	-21.0	1.75 V	222	37.7	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 135 : 6625 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	114.1 PK			1.14 H	2	68.9	45.2
2	*6625.00	100.8 AV			1.14 H	2	55.6	45.2
3	13250.00	56.5 PK	74.0	-17.5	2.79 H	329	47.0	9.5
4	13250.00	48.4 AV	54.0	-5.6	2.79 H	329	38.9	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	113.0 PK			2.07 V	284	67.8	45.2
2	*6625.00	99.9 AV			2.07 V	284	54.7	45.2
3	13250.00	54.2 PK	74.0	-19.8	1.77 V	228	44.7	9.5
4	13250.00	47.2 AV	54.0	-6.8	1.77 V	228	37.7	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 151 : 6705 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	114.3 PK			1.06 H	2	68.9	45.4
2	*6705.00	104.2 AV			1.06 H	2	58.8	45.4
3	#13410.00	57.0 PK	88.2	-31.2	2.75 H	325	47.0	10.0
4	#13410.00	48.9 AV	68.2	-19.3	2.75 H	325	38.9	10.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.5 PK			2.07 V	283	67.1	45.4
2	*6705.00	99.5 AV			2.07 V	283	54.1	45.4
3	#13410.00	54.7 PK	88.2	-33.5	1.75 V	224	44.7	10.0
4	#13410.00	47.7 AV	68.2	-20.5	1.75 V	224	37.7	10.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 167 : 6785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.9 PK			1.07 H	1	68.6	45.3
2	*6785.00	101.2 AV			1.07 H	1	55.9	45.3
3	#7125.00	64.1 PK	88.2	-24.1	1.07 H	1	56.2	7.9
4	#7125.00	52.3 AV	68.2	-15.9	1.07 H	1	44.4	7.9
5	#13570.00	56.2 PK	88.2	-32.0	2.78 H	325	47.0	9.2
6	#13570.00	48.1 AV	68.2	-20.1	2.78 H	325	38.9	9.2

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.0 PK			2.03 V	283	67.7	45.3
2	*6785.00	99.6 AV			2.03 V	283	54.3	45.3
3	#7125.00	63.9 PK	88.2	-24.3	2.03 V	283	56.0	7.9
4	#7125.00	52.1 AV	68.2	-16.1	2.03 V	283	44.2	7.9
5	#13570.00	54.0 PK	88.2	-34.2	1.75 V	225	44.8	9.2
6	#13570.00	47.0 AV	68.2	-21.2	1.75 V	225	37.8	9.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 183 : 6865 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	113.2 PK			1.10 H	5	67.7	45.5
2	*6865.00	101.3 AV			1.10 H	5	55.8	45.5
3	#13730.00	56.6 PK	88.2	-31.6	2.78 H	326	47.2	9.4
4	#13730.00	48.3 AV	68.2	-19.9	2.78 H	326	38.9	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	112.5 PK			1.97 V	283	67.0	45.5
2	*6865.00	100.1 AV			1.97 V	283	54.6	45.5
3	#13730.00	54.1 PK	88.2	-34.1	1.85 V	225	44.7	9.4
4	#13730.00	47.0 AV	68.2	-21.2	1.85 V	225	37.6	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 199 : 6945 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	113.7 PK			1.09 H	3	68.1	45.6
2	*6945.00	101.7 AV			1.09 H	3	56.1	45.6
3	#13890.00	56.4 PK	88.2	-31.8	2.75 H	321	47.0	9.4
4	#13890.00	48.2 AV	68.2	-20.0	2.75 H	321	38.8	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	112.6 PK			2.02 V	283	67.0	45.6
2	*6945.00	100.0 AV			2.02 V	283	54.4	45.6
3	#13890.00	54.1 PK	88.2	-34.1	1.82 V	228	44.7	9.4
4	#13890.00	47.1 AV	68.2	-21.1	1.82 V	228	37.7	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	114.4 PK			1.11 H	3	68.6	45.8
2	*7025.00	101.7 AV			1.11 H	3	55.9	45.8
3	#7125.00	82.8 PK	88.2	-5.4	1.11 H	3	74.9	7.9
4	#7125.00	66.4 AV	68.2	-1.8	1.11 H	3	58.5	7.9
5	#14050.00	56.8 PK	88.2	-31.4	2.75 H	329	47.0	9.8
6	#14050.00	48.8 AV	68.2	-19.4	2.75 H	329	39.0	9.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	112.3 PK			2.03 V	283	66.5	45.8
2	*7025.00	100.1 AV			2.03 V	283	54.3	45.8
3	#7125.00	80.2 PK	88.2	-8.0	2.03 V	283	72.3	7.9
4	#7125.00	64.4 AV	68.2	-3.8	2.03 V	283	56.5	7.9
5	#14050.00	54.5 PK	88.2	-33.7	1.75 V	225	44.7	9.8
6	#14050.00	47.5 AV	68.2	-20.7	1.75 V	225	37.7	9.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	86.7 PK	88.2	-1.5	1.04 H	1	81.7	5.0
2	#5925.00	61.1 AV	68.2	-7.1	1.04 H	1	56.1	5.0
3	*6025.00	105.7 PK			1.04 H	1	63.0	42.7
4	*6025.00	93.4 AV			1.04 H	1	50.7	42.7
5	12050.00	55.5 PK	74.0	-18.5	2.81 H	318	46.8	8.7
6	12050.00	47.4 AV	54.0	-6.6	2.81 H	318	38.7	8.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.7 PK	88.2	-3.5	1.98 V	285	79.7	5.0
2	#5925.00	58.3 AV	68.2	-9.9	1.98 V	285	53.3	5.0
3	*6025.00	104.3 PK			1.98 V	285	61.6	42.7
4	*6025.00	91.9 AV			1.98 V	285	49.2	42.7
5	12050.00	53.4 PK	74.0	-20.6	1.77 V	225	44.7	8.7
6	12050.00	46.2 AV	54.0	-7.8	1.77 V	225	37.5	8.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	109.5 PK			1.05 H	7	66.0	43.5
2	*6185.00	96.6 AV			1.05 H	7	53.1	43.5
3	12370.00	56.1 PK	74.0	-17.9	2.80 H	322	47.0	9.1
4	12370.00	47.8 AV	54.0	-6.2	2.80 H	322	38.7	9.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	108.5 PK			2.05 V	284	65.0	43.5
2	*6185.00	95.4 AV			2.05 V	284	51.9	43.5
3	12370.00	53.6 PK	74.0	-20.4	1.75 V	224	44.5	9.1
4	12370.00	46.3 AV	54.0	-7.7	1.75 V	224	37.2	9.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.2 PK			1.06 H	5	65.8	44.4
2	*6345.00	97.6 AV			1.06 H	5	53.2	44.4
3	12690.00	56.7 PK	74.0	-17.3	2.75 H	321	47.0	9.7
4	12690.00	48.5 AV	54.0	-5.5	2.75 H	321	38.8	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	109.0 PK			2.04 V	284	64.6	44.4
2	*6345.00	96.0 AV			2.04 V	284	51.6	44.4
3	12690.00	54.5 PK	74.0	-19.5	1.78 V	226	44.8	9.7
4	12690.00	47.2 AV	54.0	-6.8	1.78 V	226	37.5	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.7 PK			1.06 H	2	64.4	45.3
2	*6505.00	96.9 AV			1.06 H	2	51.6	45.3
3	#13010.00	56.2 PK	88.2	-32.0	2.78 H	325	46.9	9.3
4	#13010.00	48.1 AV	68.2	-20.1	2.78 H	325	38.8	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.0 PK			2.02 V	284	63.7	45.3
2	*6505.00	96.0 AV			2.02 V	284	50.7	45.3
3	#13010.00	54.1 PK	88.2	-34.1	1.78 V	232	44.8	9.3
4	#13010.00	46.9 AV	68.2	-21.3	1.78 V	232	37.6	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	111.0 PK			1.13 H	3	65.6	45.4
2	*6665.00	97.8 AV			1.13 H	3	52.4	45.4
3	#7125.00	64.2 PK	88.2	-24.0	1.13 H	3	56.3	7.9
4	#7125.00	52.2 AV	68.2	-16.0	1.13 H	3	44.3	7.9
5	13330.00	56.8 PK	74.0	-17.2	2.74 H	319	47.0	9.8
6	13330.00	48.7 AV	54.0	-5.3	2.74 H	319	38.9	9.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.8 PK			2.03 V	284	63.4	45.4
2	*6665.00	96.5 AV			2.03 V	284	51.1	45.4
3	#7125.00	63.9 PK	88.2	-24.3	2.03 V	284	56.0	7.9
4	#7125.00	51.9 AV	68.2	-16.3	2.03 V	284	44.0	7.9
5	13330.00	54.6 PK	74.0	-19.4	1.81 V	229	44.8	9.8
6	13330.00	47.4 AV	54.0	-6.6	1.81 V	229	37.6	9.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 175 : 6825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.1 PK			1.04 H	1	64.8	45.3
2	*6825.00	98.1 AV			1.04 H	1	52.8	45.3
3	#13650.00	56.4 PK	88.2	-31.8	2.77 H	321	47.0	9.4
4	#13650.00	48.1 AV	68.2	-20.1	2.77 H	321	38.7	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	108.8 PK			2.01 V	283	63.5	45.3
2	*6825.00	96.2 AV			2.01 V	283	50.9	45.3
3	#13650.00	54.0 PK	88.2	-34.2	1.72 V	227	44.6	9.4
4	#13650.00	46.8 AV	68.2	-21.4	1.72 V	227	37.4	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	108.8 PK			1.06 H	2	63.2	45.6
2	*6985.00	95.9 AV			1.06 H	2	50.3	45.6
3	#7125.00	86.5 PK	88.2	-1.7	1.06 H	2	78.6	7.9
4	#7125.00	64.6 AV	68.2	-3.6	1.06 H	2	56.7	7.9
5	#13970.00	56.5 PK	88.2	-31.7	2.75 H	321	46.8	9.7
6	#13970.00	47.7 AV	68.2	-20.5	2.75 H	321	38.0	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.9 PK			1.91 V	283	62.3	45.6
2	*6985.00	94.9 AV			1.91 V	283	49.3	45.6
3	#7125.00	82.6 PK	88.2	-5.6	1.91 V	283	74.7	7.9
4	#7125.00	60.3 AV	68.2	-7.9	1.91 V	283	52.4	7.9
5	#13970.00	54.2 PK	88.2	-34.0	1.72 V	225	44.5	9.7
6	#13970.00	46.9 AV	68.2	-21.3	1.72 V	225	37.2	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



## Partial RU\_1TX

## 26-tone RU

<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	85.4 PK	88.2	-2.8	2.29 H	48	80.4	5.0
2	#5925.00	50.0 AV	68.2	-18.2	2.29 H	48	45.0	5.0
3	*5955.00	121.0 PK			2.29 H	48	78.4	42.6
4	*5955.00	111.5 AV			2.29 H	48	68.9	42.6
5	11910.00	57.9 PK	74.0	-16.1	2.24 H	318	49.4	8.5
6	11910.00	45.2 AV	54.0	-8.8	2.24 H	318	36.7	8.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.6 PK	88.2	-5.6	2.19 V	284	77.6	5.0
2	#5925.00	49.8 AV	68.2	-18.4	2.19 V	284	44.8	5.0
3	*5955.00	119.8 PK			2.19 V	284	77.2	42.6
4	*5955.00	110.1 AV			2.19 V	284	67.5	42.6
5	11910.00	57.1 PK	74.0	-16.9	1.15 V	356	48.6	8.5
6	11910.00	44.7 AV	54.0	-9.3	1.15 V	356	36.2	8.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 49 : 6195 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	124.9 PK			2.18 H	48	81.3	43.6
2	*6195.00	115.7 AV			2.18 H	48	72.1	43.6
3	12390.00	59.5 PK	74.0	-14.5	2.28 H	315	50.4	9.1
4	12390.00	48.3 AV	54.0	-5.7	2.28 H	315	39.2	9.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	123.7 PK			2.09 V	285	80.1	43.6
2	*6195.00	114.3 AV			2.09 V	285	70.7	43.6
3	12390.00	58.2 PK	74.0	-15.8	1.17 V	347	49.1	9.1
4	12390.00	45.7 AV	54.0	-8.3	1.17 V	347	36.6	9.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	125.2 PK			2.33 H	359	80.3	44.9
2	*6415.00	116.1 AV			2.33 H	359	71.2	44.9
3	#12830.00	60.6 PK	88.2	-27.6	2.13 H	316	50.9	9.7
4	#12830.00	49.1 AV	68.2	-19.1	2.13 H	316	39.4	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	124.0 PK			2.15 V	279	79.1	44.9
2	*6415.00	114.6 AV			2.15 V	279	69.7	44.9
3	#12830.00	59.3 PK	88.2	-28.9	1.18 V	346	49.6	9.7
4	#12830.00	46.8 AV	68.2	-21.4	1.18 V	346	37.1	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	125.9 PK			2.47 H	2	80.8	45.1
2	*6435.00	116.6 AV			2.47 H	2	71.5	45.1
3	#12870.00	61.2 PK	88.2	-27.0	2.32 H	326	51.5	9.7
4	#12870.00	49.4 AV	68.2	-18.8	2.32 H	326	39.7	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	124.4 PK			2.14 V	279	79.3	45.1
2	*6435.00	115.2 AV			2.14 V	279	70.1	45.1
3	#12870.00	59.6 PK	88.2	-28.6	1.18 V	348	49.9	9.7
4	#12870.00	47.0 AV	68.2	-21.2	1.18 V	348	37.3	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	125.7 PK			2.35 H	2	80.4	45.3
2	*6475.00	116.5 AV			2.35 H	2	71.2	45.3
3	#12950.00	61.2 PK	88.2	-27.0	2.16 H	314	51.7	9.5
4	#12950.00	49.9 AV	68.2	-18.3	2.16 H	314	40.4	9.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	124.4 PK			2.15 V	282	79.1	45.3
2	*6475.00	115.1 AV			2.15 V	282	69.8	45.3
3	#12950.00	59.8 PK	88.2	-28.4	1.31 V	343	50.3	9.5
4	#12950.00	47.6 AV	68.2	-20.6	1.31 V	343	38.1	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	126.1 PK			2.41 H	1	80.8	45.3
2	*6515.00	116.9 AV			2.41 H	1	71.6	45.3
3	#13030.00	63.4 PK	88.2	-24.8	2.18 H	322	54.1	9.3
4	#13030.00	51.2 AV	68.2	-17.0	2.18 H	322	41.9	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	124.6 PK			2.10 V	281	79.3	45.3
2	*6515.00	115.5 AV			2.10 V	281	70.2	45.3
3	#13030.00	60.5 PK	88.2	-27.7	1.16 V	352	51.2	9.3
4	#13030.00	48.8 AV	68.2	-19.4	1.16 V	352	39.5	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	126.2 PK			2.41 H	359	80.9	45.3
2	*6535.00	116.8 AV			2.41 H	359	71.5	45.3
3	#13070.00	63.8 PK	88.2	-24.4	2.26 H	317	54.4	9.4
4	#13070.00	51.7 AV	68.2	-16.5	2.26 H	317	42.3	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	124.8 PK			2.20 V	291	79.5	45.3
2	*6535.00	115.4 AV			2.20 V	291	70.1	45.3
3	#13070.00	60.9 PK	88.2	-27.3	1.10 V	356	51.5	9.4
4	#13070.00	49.2 AV	68.2	-19.0	1.10 V	356	39.8	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	124.3 PK			2.39 H	2	78.9	45.4
2	*6695.00	113.9 AV			2.39 H	2	68.5	45.4
3	13390.00	61.3 PK	74.0	-12.7	2.21 H	68	51.2	10.1
4	13390.00	47.7 AV	54.0	-6.3	2.21 H	68	37.6	10.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.2 PK			1.00 V	59	76.8	45.4
2	*6695.00	111.8 AV			1.00 V	59	66.4	45.4
3	13390.00	59.0 PK	74.0	-15.0	1.27 V	42	48.9	10.1
4	13390.00	46.9 AV	54.0	-7.1	1.27 V	42	36.8	10.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	124.0 PK			1.24 H	62	78.5	45.5
2	*6855.00	113.9 AV			1.24 H	62	68.4	45.5
3	#13710.00	59.6 PK	88.2	-28.6	1.29 H	34	50.2	9.4
4	#13710.00	46.6 AV	68.2	-21.6	1.29 H	34	37.2	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.7 PK			1.35 V	26	76.2	45.5
2	*6855.00	111.7 AV			1.35 V	26	66.2	45.5
3	#13710.00	57.9 PK	88.2	-30.3	1.36 V	54	48.5	9.4
4	#13710.00	45.6 AV	68.2	-22.6	1.36 V	54	36.2	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	124.1 PK			1.52 H	36	78.6	45.5
2	*6875.00	113.6 AV			1.52 H	36	68.1	45.5
3	#13750.00	61.1 PK	88.2	-27.1	1.25 H	69	51.8	9.3
4	#13750.00	47.8 AV	68.2	-20.4	1.25 H	69	38.5	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	122.1 PK			1.62 V	27	76.6	45.5
2	*6875.00	111.8 AV			1.62 V	27	66.3	45.5
3	#13750.00	57.6 PK	88.2	-30.6	1.36 V	74	48.3	9.3
4	#13750.00	45.6 AV	68.2	-22.6	1.36 V	74	36.3	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	124.2 PK			1.36 H	85	78.6	45.6
2	*6995.00	114.0 AV			1.36 H	85	68.4	45.6
3	#13990.00	61.3 PK	88.2	-26.9	1.35 H	47	51.4	9.9
4	#13990.00	48.3 AV	68.2	-19.9	1.35 H	47	38.4	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	122.0 PK			1.47 V	26	76.4	45.6
2	*6995.00	112.4 AV			1.47 V	26	66.8	45.6
3	#13990.00	58.6 PK	88.2	-29.6	1.36 V	54	48.7	9.9
4	#13990.00	46.8 AV	68.2	-21.4	1.36 V	54	36.9	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	109.8 PK			2.37 H	9	64.0	45.8
2	*7115.00	99.7 AV			2.37 H	9	53.9	45.8
3	#7125.00	78.4 PK	88.2	-9.8	2.37 H	9	70.5	7.9
<b>4</b>	<b>#7125.00</b>	<b>66.5 AV</b>	<b>68.2</b>	<b>-1.7</b>	<b>2.37 H</b>	<b>9</b>	<b>58.6</b>	<b>7.9</b>
5	#14230.00	58.8 PK	88.2	-29.4	2.19 H	317	48.9	9.9
6	#14230.00	49.7 AV	68.2	-18.5	2.19 H	317	39.8	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	108.6 PK			2.07 V	281	62.8	45.8
2	*7115.00	98.5 AV			2.07 V	281	52.7	45.8
3	#7125.00	77.5 PK	88.2	-10.7	2.07 V	281	69.6	7.9
4	#7125.00	65.5 AV	68.2	-2.7	2.07 V	281	57.6	7.9
5	#14230.00	57.7 PK	88.2	-30.5	1.17 V	356	47.8	9.9
6	#14230.00	48.7 AV	68.2	-19.5	1.17 V	356	38.8	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

**52-tone RU**

<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	85.5 PK	88.2	-2.7	2.22 H	46	80.5	5.0
2	#5925.00	51.4 AV	68.2	-16.8	2.22 H	46	46.4	5.0
3	*5955.00	120.7 PK			2.22 H	46	78.1	42.6
4	*5955.00	109.9 AV			2.22 H	46	67.3	42.6
5	11910.00	57.7 PK	74.0	-16.3	2.25 H	314	49.2	8.5
6	11910.00	45.1 AV	54.0	-8.9	2.25 H	314	36.6	8.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.6 PK	88.2	-3.6	2.17 V	279	79.6	5.0
2	#5925.00	50.8 AV	68.2	-17.4	2.17 V	279	45.8	5.0
3	*5955.00	119.5 PK			2.17 V	279	76.9	42.6
4	*5955.00	108.7 AV			2.17 V	279	66.1	42.6
5	11910.00	57.2 PK	74.0	-16.8	1.18 V	347	48.7	8.5
6	11910.00	44.9 AV	54.0	-9.1	1.18 V	347	36.4	8.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 49 : 6195 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.7 PK			2.38 H	47	79.1	43.6
2	*6195.00	113.0 AV			2.38 H	47	69.4	43.6
3	12390.00	59.2 PK	74.0	-14.8	2.15 H	323	50.1	9.1
4	12390.00	46.7 AV	54.0	-7.3	2.15 H	323	37.6	9.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.4 PK			2.18 V	291	77.8	43.6
2	*6195.00	111.7 AV			2.18 V	291	68.1	43.6
3	12390.00	57.8 PK	74.0	-16.2	1.16 V	348	48.7	9.1
4	12390.00	45.3 AV	54.0	-8.7	1.16 V	348	36.2	9.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.7 PK			2.55 H	2	78.8	44.9
2	*6415.00	113.5 AV			2.55 H	2	68.6	44.9
3	#12830.00	59.6 PK	88.2	-28.6	2.26 H	319	49.9	9.7
4	#12830.00	47.3 AV	68.2	-20.9	2.26 H	319	37.6	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.2 PK			2.04 V	274	77.3	44.9
2	*6415.00	112.1 AV			2.04 V	274	67.2	44.9
3	#12830.00	58.3 PK	88.2	-29.9	1.17 V	354	48.6	9.7
4	#12830.00	46.0 AV	68.2	-22.2	1.17 V	354	36.3	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	124.3 PK			2.45 H	1	79.2	45.1
2	*6435.00	113.9 AV			2.45 H	1	68.8	45.1
3	#12870.00	60.0 PK	88.2	-28.2	2.21 H	317	50.3	9.7
4	#12870.00	47.5 AV	68.2	-20.7	2.21 H	317	37.8	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	123.0 PK			2.08 V	277	77.9	45.1
2	*6435.00	112.5 AV			2.08 V	277	67.4	45.1
3	#12870.00	58.6 PK	88.2	-29.6	1.17 V	347	48.9	9.7
4	#12870.00	46.1 AV	68.2	-22.1	1.17 V	347	36.4	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	124.7 PK			2.35 H	1	79.4	45.3
2	*6475.00	114.2 AV			2.35 H	1	68.9	45.3
3	#12950.00	60.2 PK	88.2	-28.0	2.19 H	312	50.7	9.5
4	#12950.00	48.0 AV	68.2	-20.2	2.19 H	312	38.5	9.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	123.5 PK			2.12 V	277	78.2	45.3
2	*6475.00	112.9 AV			2.12 V	277	67.6	45.3
3	#12950.00	58.3 PK	88.2	-29.9	1.21 V	343	48.8	9.5
4	#12950.00	45.8 AV	68.2	-22.4	1.21 V	343	36.3	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	124.7 PK			2.23 H	1	79.4	45.3
2	*6515.00	113.6 AV			2.23 H	1	68.3	45.3
3	#13030.00	61.8 PK	88.2	-26.4	2.21 H	315	52.5	9.3
4	#13030.00	50.4 AV	68.2	-17.8	2.21 H	315	41.1	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	123.2 PK			1.17 V	282	77.9	45.3
2	*6515.00	112.4 AV			1.17 V	282	67.1	45.3
3	#13030.00	59.6 PK	88.2	-28.6	2.24 V	315	50.3	9.3
4	#13030.00	47.7 AV	68.2	-20.5	2.24 V	315	38.4	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	124.6 PK			2.40 H	359	79.3	45.3
2	*6535.00	114.2 AV			2.40 H	359	68.9	45.3
3	#13070.00	62.8 PK	88.2	-25.4	2.26 H	314	53.4	9.4
4	#13070.00	51.1 AV	68.2	-17.1	2.26 H	314	41.7	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.2 PK			2.14 V	277	76.9	45.3
2	*6535.00	112.9 AV			2.14 V	277	67.6	45.3
3	#13070.00	60.0 PK	88.2	-28.2	1.14 V	358	50.6	9.4
4	#13070.00	48.7 AV	68.2	-19.5	1.14 V	358	39.3	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.8 PK			2.46 H	0	76.4	45.4
2	*6695.00	110.6 AV			2.46 H	0	65.2	45.4
3	#13990.00	60.3 PK	88.2	-27.9	2.08 H	60	50.4	9.9
4	#13990.00	47.8 AV	68.2	-20.4	2.08 H	60	37.9	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.9 PK			2.57 V	10	74.5	45.4
2	*6695.00	108.6 AV			2.57 V	10	63.2	45.4
3	#13990.00	58.8 PK	88.2	-29.4	2.14 V	36	48.9	9.9
4	#13990.00	46.7 AV	68.2	-21.5	2.14 V	36	36.8	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.7 PK			1.28 H	41	76.2	45.5
2	*6855.00	110.8 AV			1.28 H	41	65.3	45.5
3	#13710.00	61.8 PK	88.2	-26.4	1.27 H	55	52.4	9.4
4	#13710.00	47.9 AV	68.2	-20.3	1.27 H	55	38.5	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.8 PK			1.27 V	63	74.3	45.5
2	*6855.00	108.0 AV			1.27 V	63	62.5	45.5
3	#13710.00	57.7 PK	88.2	-30.5	1.33 V	45	48.3	9.4
4	#13710.00	46.4 AV	68.2	-21.8	1.33 V	45	37.0	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	122.1 PK			1.36 H	92	76.6	45.5
2	*6875.00	113.6 AV			1.36 H	92	68.1	45.5
3	#13750.00	60.0 PK	88.2	-28.2	1.36 H	57	50.7	9.3
4	#13750.00	47.8 AV	68.2	-20.4	1.36 H	57	38.5	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	120.5 PK			1.35 V	41	75.0	45.5
2	*6875.00	108.7 AV			1.35 V	41	63.2	45.5
3	#13750.00	57.6 PK	88.2	-30.6	1.35 V	96	48.3	9.3
4	#13750.00	46.2 AV	68.2	-22.0	1.35 V	96	36.9	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	122.1 PK			1.52 H	36	76.5	45.6
2	*6995.00	111.4 AV			1.52 H	36	65.8	45.6
3	#13990.00	60.7 PK	88.2	-27.5	1.22 H	65	50.8	9.9
4	#13990.00	48.1 AV	68.2	-20.1	1.22 H	65	38.2	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	120.2 PK			1.35 V	47	74.6	45.6
2	*6995.00	109.3 AV			1.35 V	47	63.7	45.6
3	#13990.00	58.5 PK	88.2	-29.7	1.32 V	54	48.6	9.9
4	#13990.00	46.7 AV	68.2	-21.5	1.32 V	54	36.8	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	114.1 PK			2.37 H	6	68.3	45.8
2	*7115.00	99.9 AV			2.37 H	6	54.1	45.8
3	#7125.00	79.1 PK	88.2	-9.1	2.37 H	6	71.2	7.9
<b>4</b>	<b>#7125.00</b>	<b>66.5 AV</b>	<b>68.2</b>	<b>-1.7</b>	<b>2.37 H</b>	<b>6</b>	<b>58.6</b>	<b>7.9</b>
5	#14230.00	58.3 PK	88.2	-29.9	2.21 H	313	48.4	9.9
6	#14230.00	49.5 AV	68.2	-18.7	2.21 H	313	39.6	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	112.7 PK			2.06 V	287	66.9	45.8
2	*7115.00	98.6 AV			2.06 V	287	52.8	45.8
3	#7125.00	78.7 PK	88.2	-9.5	2.06 V	287	70.8	7.9
4	#7125.00	65.3 AV	68.2	-2.9	2.06 V	287	57.4	7.9
5	#14230.00	57.1 PK	88.2	-31.1	1.21 V	343	47.2	9.9
6	#14230.00	48.3 AV	68.2	-19.9	1.21 V	343	38.4	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



## 106-tone RU

<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	85.2 PK	88.2	-3.0	2.22 H	46	80.2	5.0
2	#5925.00	60.8 AV	68.2	-7.4	2.22 H	46	55.8	5.0
3	*5955.00	122.3 PK			2.22 H	46	79.7	42.6
4	*5955.00	111.4 AV			2.22 H	46	68.8	42.6
5	11910.00	58.0 PK	74.0	-16.0	2.17 H	311	49.5	8.5
6	11910.00	45.2 AV	54.0	-8.8	2.17 H	311	36.7	8.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.5 PK	88.2	-5.7	2.12 V	278	77.5	5.0
2	#5925.00	59.9 AV	68.2	-8.3	2.12 V	278	54.9	5.0
3	*5955.00	121.0 PK			2.12 V	278	78.4	42.6
4	*5955.00	110.1 AV			2.12 V	278	67.5	42.6
5	11910.00	57.3 PK	74.0	-16.7	1.18 V	351	48.8	8.5
6	11910.00	44.7 AV	54.0	-9.3	1.18 V	351	36.2	8.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 49 : 6195 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.9 PK			2.27 H	49	77.3	43.6
2	*6195.00	109.7 AV			2.27 H	49	66.1	43.6
3	12390.00	58.4 PK	74.0	-15.6	2.28 H	316	49.3	9.1
4	12390.00	46.2 AV	54.0	-7.8	2.28 H	316	37.1	9.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.4 PK			2.08 V	284	75.8	43.6
2	*6195.00	108.3 AV			2.08 V	284	64.7	43.6
3	12390.00	57.8 PK	74.0	-16.2	1.18 V	355	48.7	9.1
4	12390.00	45.4 AV	54.0	-8.6	1.18 V	355	36.3	9.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.9 PK			2.37 H	3	77.0	44.9
2	*6415.00	110.8 AV			2.37 H	3	65.9	44.9
3	#12830.00	59.1 PK	88.2	-29.1	2.26 H	307	49.4	9.7
4	#12830.00	46.5 AV	68.2	-21.7	2.26 H	307	36.8	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.5 PK			2.08 V	276	75.6	44.9
2	*6415.00	109.5 AV			2.08 V	276	64.6	44.9
3	#12830.00	58.4 PK	88.2	-29.8	1.16 V	347	48.7	9.7
4	#12830.00	46.0 AV	68.2	-22.2	1.16 V	347	36.3	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	122.2 PK			2.30 H	2	77.1	45.1
2	*6435.00	110.9 AV			2.30 H	2	65.8	45.1
3	#12870.00	59.0 PK	88.2	-29.2	2.23 H	308	49.3	9.7
4	#12870.00	46.5 AV	68.2	-21.7	2.23 H	308	36.8	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	120.8 PK			2.23 V	282	75.7	45.1
2	*6435.00	109.6 AV			2.23 V	282	64.5	45.1
3	#12870.00	58.4 PK	88.2	-29.8	1.16 V	345	48.7	9.7
4	#12870.00	45.9 AV	68.2	-22.3	1.16 V	345	36.2	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.6 PK			2.43 H	1	77.3	45.3
2	*6475.00	111.4 AV			2.43 H	1	66.1	45.3
3	#12950.00	59.7 PK	88.2	-28.5	2.32 H	324	50.2	9.5
4	#12950.00	47.2 AV	68.2	-21.0	2.32 H	324	37.7	9.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	121.1 PK			2.05 V	292	75.8	45.3
2	*6475.00	110.0 AV			2.05 V	292	64.7	45.3
3	#12950.00	58.2 PK	88.2	-30.0	1.07 V	356	48.7	9.5
4	#12950.00	45.8 AV	68.2	-22.4	1.07 V	356	36.3	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	122.0 PK			2.42 H	1	76.7	45.3
2	*6515.00	110.8 AV			2.42 H	1	65.5	45.3
3	#13030.00	59.9 PK	88.2	-28.3	2.24 H	313	50.6	9.3
4	#13030.00	48.5 AV	68.2	-19.7	2.24 H	313	39.2	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	120.6 PK			2.11 V	279	75.3	45.3
2	*6515.00	109.4 AV			2.11 V	279	64.1	45.3
3	#13030.00	58.5 PK	88.2	-29.7	1.18 V	353	49.2	9.3
4	#13030.00	46.0 AV	68.2	-22.2	1.18 V	353	36.7	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.4 PK			2.36 H	356	77.1	45.3
2	*6535.00	110.8 AV			2.36 H	356	65.5	45.3
3	#13070.00	60.8 PK	88.2	-27.4	1.19 H	355	51.4	9.4
4	#13070.00	49.1 AV	68.2	-19.1	1.19 H	355	39.7	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.2 PK			2.08 V	288	75.9	45.3
2	*6535.00	109.6 AV			2.08 V	288	64.3	45.3
3	#13070.00	58.8 PK	88.2	-29.4	1.15 V	347	49.4	9.4
4	#13070.00	46.7 AV	68.2	-21.5	1.15 V	347	37.3	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.3 PK			1.03 H	357	74.9	45.4
2	*6695.00	107.7 AV			1.03 H	357	62.3	45.4
3	#13990.00	60.6 PK	88.2	-27.6	1.10 H	11	50.7	9.9
4	#13990.00	47.2 AV	68.2	-21.0	1.10 H	11	37.3	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.5 PK			1.11 V	19	72.1	45.4
2	*6695.00	105.6 AV			1.11 V	19	60.2	45.4
3	#13990.00	58.5 PK	88.2	-29.7	1.17 V	16	48.6	9.9
4	#13990.00	47.5 AV	68.2	-20.7	1.17 V	16	37.6	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.0 PK			1.28 H	63	74.5	45.5
2	*6855.00	107.8 AV			1.28 H	63	62.3	45.5
3	#13710.00	60.9 PK	88.2	-27.3	1.36 H	48	51.5	9.4
4	#13710.00	47.4 AV	68.2	-20.8	1.36 H	48	38.0	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.1 PK			1.45 V	95	72.6	45.5
2	*6855.00	106.3 AV			1.45 V	95	60.8	45.5
3	#13710.00	57.7 PK	88.2	-30.5	1.26 V	35	48.3	9.4
4	#13710.00	46.0 AV	68.2	-22.2	1.26 V	35	36.6	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	120.1 PK			1.36 H	48	74.6	45.5
2	*6875.00	107.9 AV			1.36 H	48	62.4	45.5
3	#13750.00	60.0 PK	88.2	-28.2	1.36 H	47	50.7	9.3
4	#13750.00	47.8 AV	68.2	-20.4	1.36 H	47	38.5	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	118.2 PK			1.52 V	39	72.7	45.5
2	*6875.00	106.2 AV			1.52 V	39	60.7	45.5
3	#13750.00	58.0 PK	88.2	-30.2	1.26 V	74	48.7	9.3
4	#13750.00	46.1 AV	68.2	-22.1	1.26 V	74	36.8	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	120.4 PK			1.36 H	57	74.8	45.6
2	*6995.00	108.3 AV			1.36 H	57	62.7	45.6
3	#13990.00	61.6 PK	88.2	-26.6	1.36 H	54	51.7	9.9
4	#13990.00	48.3 AV	68.2	-19.9	1.36 H	54	38.4	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	118.2 PK			1.35 V	47	72.6	45.6
2	*6995.00	106.9 AV			1.35 V	47	61.3	45.6
3	#13990.00	58.3 PK	88.2	-29.9	1.36 V	74	48.4	9.9
4	#13990.00	46.7 AV	68.2	-21.5	1.36 V	74	36.8	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	111.1 PK			2.35 H	7	65.3	45.8
2	*7115.00	99.5 AV			2.35 H	7	53.7	45.8
3	#7125.00	78.4 PK	88.2	-9.8	2.35 H	7	70.5	7.9
4	#7125.00	66.2 AV	68.2	-2.0	2.35 H	7	58.3	7.9
5	#14230.00	57.7 PK	88.2	-30.5	2.18 H	319	47.8	9.9
6	#14230.00	49.2 AV	68.2	-19.0	2.18 H	319	39.3	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	110.0 PK			2.02 V	284	64.2	45.8
2	*7115.00	98.4 AV			2.02 V	284	52.6	45.8
3	#7125.00	77.4 PK	88.2	-10.8	2.02 V	284	69.5	7.9
4	#7125.00	65.4 AV	68.2	-2.8	2.02 V	284	57.5	7.9
5	#14230.00	56.4 PK	88.2	-31.8	1.18 V	347	46.5	9.9
6	#14230.00	48.1 AV	68.2	-20.1	1.18 V	347	38.2	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

**2TX**

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.0 PK	88.2	-16.2	1.08 H	359	67.0	5.0
2	#5925.00	57.3 AV	68.2	-10.9	1.08 H	359	52.3	5.0
3	*5955.00	115.7 PK			1.08 H	359	73.1	42.6
4	*5955.00	107.6 AV			1.08 H	359	65.0	42.6
5	11910.00	55.1 PK	74.0	-18.9	2.70 H	317	46.6	8.5
6	11910.00	47.1 AV	54.0	-6.9	2.70 H	317	38.6	8.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.7 PK	88.2	-17.5	2.18 V	303	65.7	5.0
2	#5925.00	56.3 AV	68.2	-11.9	2.18 V	303	51.3	5.0
3	*5955.00	111.5 PK			2.18 V	303	68.9	42.6
4	*5955.00	104.3 AV			2.18 V	303	61.7	42.6
5	11910.00	54.3 PK	74.0	-19.7	1.68 V	195	45.8	8.5
6	11910.00	46.6 AV	54.0	-7.4	1.68 V	195	38.1	8.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 49 : 6195 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	114.3 PK			1.00 H	54	70.7	43.6
2	*6195.00	106.6 AV			1.00 H	54	63.0	43.6
3	12390.00	54.3 PK	74.0	-19.7	1.69 H	40	45.2	9.1
4	12390.00	46.0 AV	54.0	-8.0	1.69 H	40	36.9	9.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	110.3 PK			2.20 V	304	66.7	43.6
2	*6195.00	102.6 AV			2.20 V	304	59.0	43.6
3	12390.00	53.6 PK	74.0	-20.4	3.04 V	192	44.5	9.1
4	12390.00	45.1 AV	54.0	-8.9	3.04 V	192	36.0	9.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.5 PK			1.00 H	312	68.6	44.9
2	*6415.00	106.5 AV			1.00 H	312	61.6	44.9
3	#12830.00	54.6 PK	88.2	-33.6	1.05 H	302	44.9	9.7
4	#12830.00	46.6 AV	68.2	-21.6	1.05 H	302	36.9	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.4 PK			2.19 V	305	64.5	44.9
2	*6415.00	102.4 AV			2.19 V	305	57.5	44.9
3	#12830.00	53.5 PK	88.2	-34.7	3.80 V	357	43.8	9.7
4	#12830.00	46.4 AV	68.2	-21.8	3.80 V	357	36.7	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	113.8 PK			1.00 H	313	68.7	45.1
2	*6435.00	106.8 AV			1.00 H	313	61.7	45.1
3	#12870.00	56.1 PK	88.2	-32.1	3.39 H	279	46.4	9.7
4	#12870.00	46.4 AV	68.2	-21.8	3.39 H	279	36.7	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.8 PK			2.20 V	308	64.7	45.1
2	*6435.00	102.8 AV			2.20 V	308	57.7	45.1
3	#12870.00	54.9 PK	88.2	-33.3	3.80 V	114	45.2	9.7
4	#12870.00	45.9 AV	68.2	-22.3	3.80 V	114	36.2	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	113.4 PK			1.00 H	322	68.1	45.3
2	*6475.00	106.4 AV			1.00 H	322	61.1	45.3
3	#12950.00	55.4 PK	88.2	-32.8	1.46 H	199	45.9	9.5
4	#12950.00	46.8 AV	68.2	-21.4	1.46 H	199	37.3	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	109.2 PK			2.16 V	297	63.9	45.3
2	*6475.00	102.2 AV			2.16 V	297	56.9	45.3
3	#12950.00	54.8 PK	88.2	-33.4	1.92 V	358	45.3	9.5
4	#12950.00	46.5 AV	68.2	-21.7	1.92 V	358	37.0	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	113.5 PK			1.00 H	319	68.2	45.3
2	*6515.00	106.5 AV			1.00 H	319	61.2	45.3
3	#13030.00	56.0 PK	88.2	-32.2	1.70 H	210	46.7	9.3
4	#13030.00	46.8 AV	68.2	-21.4	1.70 H	210	37.5	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	109.6 PK			2.20 V	299	64.3	45.3
2	*6515.00	102.6 AV			2.20 V	299	57.3	45.3
3	#13030.00	54.6 PK	88.2	-33.6	2.66 V	126	45.3	9.3
4	#13030.00	46.2 AV	68.2	-22.0	2.66 V	126	36.9	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.9 PK			1.00 H	312	68.6	45.3
2	*6535.00	106.9 AV			1.00 H	312	61.6	45.3
3	#13070.00	55.1 PK	88.2	-33.1	2.37 H	77	45.7	9.4
4	#13070.00	47.0 AV	68.2	-21.2	2.37 H	77	37.6	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.7 PK			2.18 V	302	64.4	45.3
2	*6535.00	102.7 AV			2.18 V	302	57.4	45.3
3	#13070.00	54.0 PK	88.2	-34.2	3.66 V	136	44.6	9.4
4	#13070.00	46.4 AV	68.2	-21.8	3.66 V	136	37.0	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.9 PK			1.00 H	311	68.5	45.4
2	*6695.00	106.6 AV			1.00 H	311	61.2	45.4
3	13390.00	56.9 PK	74.0	-17.1	2.16 H	338	46.8	10.1
4	13390.00	49.4 AV	54.0	-4.6	2.16 H	338	39.3	10.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.9 PK			2.21 V	305	64.5	45.4
2	*6695.00	102.6 AV			2.21 V	305	57.2	45.4
3	13390.00	56.4 PK	74.0	-17.6	2.59 V	42	46.3	10.1
4	13390.00	48.7 AV	54.0	-5.3	2.59 V	42	38.6	10.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.8 PK			1.00 H	309	68.3	45.5
2	*6855.00	106.4 AV			1.00 H	309	60.9	45.5
3	#7125.00	62.7 PK	88.2	-25.5	1.00 H	309	54.8	7.9
4	#7125.00	51.8 AV	68.2	-16.4	1.00 H	309	43.9	7.9
5	#13710.00	56.6 PK	88.2	-31.6	1.95 H	128	47.2	9.4
6	#13710.00	48.7 AV	68.2	-19.5	1.95 H	128	39.3	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.0 PK			2.07 V	296	63.5	45.5
2	*6855.00	102.0 AV			2.07 V	296	56.5	45.5
3	#7125.00	62.5 PK	88.2	-25.7	2.07 V	296	54.6	7.9
4	#7125.00	51.6 AV	68.2	-16.6	2.07 V	296	43.7	7.9
5	#13710.00	56.1 PK	88.2	-32.1	3.61 V	175	46.7	9.4
6	#13710.00	47.7 AV	68.2	-20.5	3.61 V	175	38.3	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	115.6 PK			1.00 H	298	70.1	45.5
2	*6875.00	108.6 AV			1.00 H	298	63.1	45.5
3	#13750.00	56.4 PK	88.2	-31.8	3.60 H	93	47.1	9.3
4	#13750.00	48.6 AV	68.2	-19.6	3.60 H	93	39.3	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.3 PK			1.29 V	322	65.8	45.5
2	*6875.00	104.3 AV			1.29 V	322	58.8	45.5
3	#13750.00	56.0 PK	88.2	-32.2	1.85 V	252	46.7	9.3
4	#13750.00	48.1 AV	68.2	-20.1	1.85 V	252	38.8	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	115.0 PK			1.00 H	294	69.4	45.6
2	*6995.00	107.5 AV			1.00 H	294	61.9	45.6
3	#13990.00	57.9 PK	88.2	-30.3	1.92 H	255	48.0	9.9
4	#13990.00	50.1 AV	68.2	-18.1	1.92 H	255	40.2	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.8 PK			1.25 V	321	65.2	45.6
2	*6995.00	103.3 AV			1.25 V	321	57.7	45.6
3	#13990.00	57.5 PK	88.2	-30.7	1.54 V	77	47.6	9.9
4	#13990.00	49.4 AV	68.2	-18.8	1.54 V	77	39.5	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	107.4 PK			1.00 H	298	61.6	45.8
2	*7115.00	99.6 AV			1.00 H	298	53.8	45.8
3	#7125.00	78.6 PK	88.2	-9.6	1.00 H	298	70.7	7.9
4	#7125.00	66.5 AV	68.2	-1.7	1.00 H	298	58.6	7.9
5	#14230.00	58.4 PK	88.2	-29.8	1.65 H	140	48.5	9.9
6	#14230.00	51.1 AV	68.2	-17.1	1.65 H	140	41.2	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.3 PK			1.30 V	251	57.5	45.8
2	*7115.00	95.8 AV			1.30 V	251	50.0	45.8
3	#7125.00	74.1 PK	88.2	-14.1	1.30 V	251	66.2	7.9
4	#7125.00	61.2 AV	68.2	-7.0	1.30 V	251	53.3	7.9
5	#14230.00	57.4 PK	88.2	-30.8	1.68 V	199	47.5	9.9
6	#14230.00	50.3 AV	68.2	-17.9	1.68 V	199	40.4	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.4 PK	88.2	-5.8	1.02 H	316	77.4	5.0
2	#5925.00	65.8 AV	68.2	-2.4	1.02 H	316	60.8	5.0
3	*5955.00	118.1 PK			1.02 H	316	75.5	42.6
4	*5955.00	107.3 AV			1.02 H	316	64.7	42.6
5	11910.00	54.8 PK	74.0	-19.2	1.14 H	312	46.3	8.5
6	11910.00	47.0 AV	54.0	-7.0	1.14 H	312	38.5	8.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.1 PK	88.2	-9.1	1.41 V	293	74.1	5.0
2	#5925.00	63.6 AV	68.2	-4.6	1.41 V	293	58.6	5.0
3	*5955.00	116.5 PK			1.41 V	293	73.9	42.6
4	*5955.00	105.8 AV			1.41 V	293	63.2	42.6
5	11910.00	54.1 PK	74.0	-19.9	3.30 V	288	45.6	8.5
6	11910.00	46.6 AV	54.0	-7.4	3.30 V	288	38.1	8.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 49 : 6195 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.4 PK			1.00 H	316	74.8	43.6
2	*6195.00	107.6 AV			1.00 H	316	64.0	43.6
3	12390.00	54.4 PK	74.0	-19.6	1.72 H	339	45.3	9.1
4	12390.00	45.5 AV	54.0	-8.5	1.72 H	339	36.4	9.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.8 PK			1.88 V	326	73.2	43.6
2	*6195.00	106.0 AV			1.88 V	326	62.4	43.6
3	12390.00	53.5 PK	74.0	-20.5	4.00 V	316	44.4	9.1
4	12390.00	44.8 AV	54.0	-9.2	4.00 V	316	35.7	9.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.1 PK			1.00 H	314	73.2	44.9
2	*6415.00	107.3 AV			1.00 H	314	62.4	44.9
3	#12830.00	51.4 PK	88.2	-36.8	2.85 H	291	41.7	9.7
4	#12830.00	43.4 AV	68.2	-24.8	2.85 H	291	33.7	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.5 PK			1.90 V	330	71.6	44.9
2	*6415.00	105.7 AV			1.90 V	330	60.8	44.9
3	#12830.00	53.9 PK	88.2	-34.3	1.82 V	81	44.2	9.7
4	#12830.00	46.3 AV	68.2	-21.9	1.82 V	81	36.6	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	118.1 PK			1.00 H	318	73.0	45.1
2	*6435.00	107.3 AV			1.00 H	318	62.2	45.1
3	#12870.00	55.5 PK	88.2	-32.7	3.30 H	22	45.8	9.7
4	#12870.00	46.7 AV	68.2	-21.5	3.30 H	22	37.0	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	116.5 PK			1.92 V	333	71.4	45.1
2	*6435.00	105.7 AV			1.92 V	333	60.6	45.1
3	#12870.00	55.0 PK	88.2	-33.2	1.85 V	154	45.3	9.7
4	#12870.00	46.0 AV	68.2	-22.2	1.85 V	154	36.3	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.2 PK			1.00 H	319	72.9	45.3
2	*6475.00	107.4 AV			1.00 H	319	62.1	45.3
3	#12950.00	55.3 PK	88.2	-32.9	2.91 H	170	45.8	9.5
4	#12950.00	47.2 AV	68.2	-21.0	2.91 H	170	37.7	9.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.6 PK			1.88 V	326	71.3	45.3
2	*6475.00	105.8 AV			1.88 V	326	60.5	45.3
3	#12950.00	54.8 PK	88.2	-33.4	2.71 V	320	45.3	9.5
4	#12950.00	46.7 AV	68.2	-21.5	2.71 V	320	37.2	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	118.0 PK			1.02 H	314	72.7	45.3
2	*6515.00	107.2 AV			1.02 H	314	61.9	45.3
3	#13030.00	55.4 PK	88.2	-32.8	1.46 H	190	46.1	9.3
4	#13030.00	47.0 AV	68.2	-21.2	1.46 H	190	37.7	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	116.4 PK			1.02 V	314	71.1	45.3
2	*6515.00	105.6 AV			1.02 V	314	60.3	45.3
3	#13030.00	54.8 PK	88.2	-33.4	1.25 V	83	45.5	9.3
4	#13030.00	46.1 AV	68.2	-22.1	1.25 V	83	36.8	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.7 PK			1.00 H	325	73.4	45.3
2	*6535.00	107.9 AV			1.00 H	325	62.6	45.3
3	#13070.00	54.9 PK	88.2	-33.3	3.90 H	169	45.5	9.4
4	#13070.00	47.0 AV	68.2	-21.2	3.90 H	169	37.6	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.1 PK			1.92 V	330	71.8	45.3
2	*6535.00	106.3 AV			1.92 V	330	61.0	45.3
3	#13070.00	54.3 PK	88.2	-33.9	1.44 V	83	44.9	9.4
4	#13070.00	46.7 AV	68.2	-21.5	1.44 V	83	37.3	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.7 PK			1.00 H	314	73.3	45.4
2	*6695.00	107.9 AV			1.00 H	314	62.5	45.4
3	13390.00	57.1 PK	74.0	-16.9	1.68 H	305	47.0	10.1
4	13390.00	49.3 AV	54.0	-4.7	1.68 H	305	39.2	10.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.1 PK			1.89 V	331	71.7	45.4
2	*6695.00	106.3 AV			1.89 V	331	60.9	45.4
3	13390.00	55.9 PK	74.0	-18.1	1.98 V	208	45.8	10.1
4	13390.00	48.8 AV	54.0	-5.2	1.98 V	208	38.7	10.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.3 PK			1.00 H	321	72.8	45.5
2	*6855.00	107.5 AV			1.00 H	321	62.0	45.5
3	#7125.00	62.2 PK	88.2	-26.0	1.00 H	321	54.3	7.9
4	#7125.00	51.8 AV	68.2	-16.4	1.00 H	321	43.9	7.9
5	#13710.00	57.0 PK	88.2	-31.2	1.92 H	139	47.6	9.4
6	#13710.00	48.6 AV	68.2	-19.6	1.92 H	139	39.2	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.7 PK			2.39 V	329	71.2	45.5
2	*6855.00	105.9 AV			2.39 V	329	60.4	45.5
3	#7125.00	62.0 PK	88.2	-26.2	2.39 V	329	54.1	7.9
4	#7125.00	51.6 AV	68.2	-16.6	2.39 V	329	43.7	7.9
5	#13710.00	55.6 PK	88.2	-32.6	1.30 V	324	46.2	9.4
6	#13710.00	48.2 AV	68.2	-20.0	1.30 V	324	38.8	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	118.0 PK			1.00 H	298	72.5	45.5
2	*6875.00	108.0 AV			1.00 H	298	62.5	45.5
3	#13750.00	56.7 PK	88.2	-31.5	2.34 H	25	47.4	9.3
4	#13750.00	49.0 AV	68.2	-19.2	2.34 H	25	39.7	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	116.4 PK			1.28 V	323	70.9	45.5
2	*6875.00	105.6 AV			1.28 V	323	60.1	45.5
3	#13750.00	57.2 PK	88.2	-31.0	3.84 V	165	47.9	9.3
4	#13750.00	49.0 AV	68.2	-19.2	3.84 V	165	39.7	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	118.1 PK			1.00 H	297	72.5	45.6
2	*6995.00	108.1 AV			1.00 H	297	62.5	45.6
3	#13990.00	58.0 PK	88.2	-30.2	3.25 H	177	48.1	9.9
4	#13990.00	49.9 AV	68.2	-18.3	3.25 H	177	40.0	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	116.5 PK			1.31 V	325	70.9	45.6
2	*6995.00	105.7 AV			1.31 V	325	60.1	45.6
3	#13990.00	56.8 PK	88.2	-31.4	1.98 V	339	46.9	9.9
4	#13990.00	49.5 AV	68.2	-18.7	1.98 V	339	39.6	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	113.4 PK			2.09 H	359	67.6	45.8
2	*7115.00	104.2 AV			2.09 H	359	58.4	45.8
3	#7125.00	77.3 PK	88.2	-10.9	2.09 H	359	69.4	7.9
4	<b>#7125.00</b>	<b>66.6 AV</b>	<b>68.2</b>	<b>-1.6</b>	<b>2.09 H</b>	<b>359</b>	<b>58.7</b>	<b>7.9</b>
5	#14230.00	62.7 PK	88.2	-25.5	2.03 H	68	52.8	9.9
6	#14230.00	50.2 AV	68.2	-18.0	2.03 H	68	40.3	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	112.9 PK			3.24 V	262	67.1	45.8
2	*7115.00	102.4 AV			3.24 V	262	56.6	45.8
3	#7125.00	77.5 PK	88.2	-10.7	3.24 V	262	69.6	7.9
4	#7125.00	65.6 AV	68.2	-2.6	3.24 V	262	57.7	7.9
5	#14230.00	59.0 PK	88.2	-29.2	1.18 V	59	49.1	9.9
6	#14230.00	47.5 AV	68.2	-20.7	1.18 V	59	37.6	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 3 : 5965 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.7 PK	88.2	-5.5	1.06 H	318	77.7	5.0
2	#5925.00	66.5 AV	68.2	-1.7	1.06 H	318	61.5	5.0
3	*5965.00	114.3 PK			1.06 H	318	71.7	42.6
4	*5965.00	104.3 AV			1.06 H	318	61.7	42.6
5	11930.00	61.1 PK	74.0	-12.9	2.74 H	105	52.6	8.5
6	11930.00	49.4 AV	54.0	-4.6	2.74 H	105	40.9	8.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5922.37	82.0 PK	88.2	-6.2	1.42 V	322	77.0	5.0
2	#5922.37	65.0 AV	68.2	-3.2	1.42 V	322	60.0	5.0
3	*5965.00	113.0 PK			1.42 V	322	70.4	42.6
4	*5965.00	102.7 AV			1.42 V	322	60.1	42.6
5	11930.00	58.8 PK	74.0	-15.2	1.53 V	265	50.3	8.5
6	11930.00	49.0 AV	54.0	-5.0	1.53 V	265	40.5	8.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 51 : 6205 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	117.9 PK			1.00 H	316	74.2	43.7
2	*6205.00	107.3 AV			1.00 H	316	63.6	43.7
3	12410.00	59.4 PK	74.0	-14.6	2.25 H	167	50.2	9.2
4	12410.00	48.9 AV	54.0	-5.1	2.25 H	167	39.7	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.2 PK			1.36 V	319	70.5	43.7
2	*6205.00	105.0 AV			1.36 V	319	61.3	43.7
3	12410.00	58.3 PK	74.0	-15.7	3.24 V	178	49.1	9.2
4	12410.00	48.4 AV	54.0	-5.6	3.24 V	178	39.2	9.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 91 : 6405 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	116.4 PK			1.00 H	7	71.6	44.8
2	*6405.00	108.0 AV			1.00 H	7	63.2	44.8
3	#12810.00	60.2 PK	88.2	-28.0	2.54 H	118	50.4	9.8
4	#12810.00	49.7 AV	68.2	-18.5	2.54 H	118	39.9	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	116.0 PK			1.25 V	296	71.2	44.8
2	*6405.00	107.6 AV			1.25 V	296	62.8	44.8
3	#12810.00	58.8 PK	88.2	-29.4	3.44 V	287	49.0	9.8
4	#12810.00	48.7 AV	68.2	-19.5	3.44 V	287	38.9	9.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 99 : 6445 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	116.5 PK			1.00 H	6	71.4	45.1
2	*6445.00	108.1 AV			1.00 H	6	63.0	45.1
3	#12890.00	55.3 PK	88.2	-32.9	3.10 H	278	45.6	9.7
4	#12890.00	46.8 AV	68.2	-21.4	3.10 H	278	37.1	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	116.0 PK			1.26 V	292	70.9	45.1
2	*6445.00	107.6 AV			1.26 V	292	62.5	45.1
3	#12890.00	55.1 PK	88.2	-33.1	2.60 V	237	45.4	9.7
4	#12890.00	46.0 AV	68.2	-22.2	2.60 V	237	36.3	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 107 : 6485 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	116.2 PK			1.01 H	13	70.9	45.3
2	*6485.00	107.8 AV			1.01 H	13	62.5	45.3
3	#12970.00	55.0 PK	88.2	-33.2	3.55 H	202	45.6	9.4
4	#12970.00	46.3 AV	68.2	-21.9	3.55 H	202	36.9	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	115.6 PK			1.22 V	298	70.3	45.3
2	*6485.00	107.2 AV			1.22 V	298	61.9	45.3
3	#12970.00	54.7 PK	88.2	-33.5	1.82 V	323	45.3	9.4
4	#12970.00	45.7 AV	68.2	-22.5	1.82 V	323	36.3	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 115 : 6525 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	116.3 PK			1.00 H	8	71.0	45.3
2	*6525.00	107.9 AV			1.00 H	8	62.6	45.3
3	#13050.00	55.4 PK	88.2	-32.8	2.25 H	189	46.1	9.3
4	#13050.00	46.5 AV	68.2	-21.7	2.25 H	189	37.2	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	115.8 PK			1.20 V	300	70.5	45.3
2	*6525.00	107.4 AV			1.20 V	300	62.1	45.3
3	#13050.00	55.3 PK	88.2	-32.9	2.00 V	151	46.0	9.3
4	#13050.00	46.3 AV	68.2	-21.9	2.00 V	151	37.0	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 123 : 6565 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	117.4 PK			1.00 H	7	72.2	45.2
2	*6565.00	107.9 AV			1.00 H	7	62.7	45.2
3	#13130.00	60.3 PK	88.2	-27.9	2.32 H	156	50.7	9.6
4	#13130.00	50.1 AV	68.2	-18.1	2.32 H	156	40.5	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	117.2 PK			1.14 V	295	72.0	45.2
2	*6565.00	107.6 AV			1.14 V	295	62.4	45.2
3	#13130.00	59.3 PK	88.2	-28.9	2.54 V	153	49.7	9.6
4	#13130.00	49.2 AV	68.2	-19.0	2.54 V	153	39.6	9.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 147 : 6685 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	117.1 PK			1.03 H	301	71.7	45.4
2	*6685.00	107.8 AV			1.03 H	301	62.4	45.4
3	13370.00	59.1 PK	74.0	-14.9	3.24 H	155	49.1	10.0
4	13370.00	48.9 AV	54.0	-5.1	3.24 H	155	38.9	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	117.0 PK			1.07 V	294	71.6	45.4
2	*6685.00	107.6 AV			1.07 V	294	62.2	45.4
3	13370.00	57.8 PK	74.0	-16.2	2.78 V	226	47.8	10.0
4	13370.00	48.2 AV	54.0	-5.8	2.78 V	226	38.2	10.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 179 : 6845 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	118.9 PK			2.24 H	308	73.4	45.5
2	*6845.00	109.2 AV			2.24 H	308	63.7	45.5
3	#7125.00	63.9 PK	88.2	-24.3	2.24 H	308	56.0	7.9
4	#7125.00	53.0 AV	68.2	-15.2	2.24 H	308	45.1	7.9
5	#13690.00	58.7 PK	88.2	-29.5	1.23 H	254	49.3	9.4
6	#13690.00	48.9 AV	68.2	-19.3	1.23 H	254	39.5	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	116.2 PK			1.20 V	294	70.7	45.5
2	*6845.00	106.7 AV			1.20 V	294	61.2	45.5
3	#7125.00	63.8 PK	88.2	-24.4	1.20 V	294	55.9	7.9
4	#7125.00	52.8 AV	68.2	-15.4	1.20 V	294	44.9	7.9
5	#13690.00	57.9 PK	88.2	-30.3	3.25 V	125	48.5	9.4
6	#13690.00	48.0 AV	68.2	-20.2	3.25 V	125	38.6	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 187 : 6885 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	116.7 PK			1.00 H	297	71.2	45.5
2	*6885.00	107.5 AV			1.00 H	297	62.0	45.5
3	#13770.00	56.8 PK	88.2	-31.4	1.65 H	152	47.4	9.4
4	#13770.00	49.3 AV	68.2	-18.9	1.65 H	152	39.9	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	116.2 PK			1.22 V	303	70.7	45.5
2	*6885.00	107.0 AV			1.22 V	303	61.5	45.5
3	#13770.00	55.8 PK	88.2	-32.4	1.03 V	137	46.4	9.4
4	#13770.00	48.8 AV	68.2	-19.4	1.03 V	137	39.4	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 203 : 6965 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	116.8 PK			1.00 H	289	71.2	45.6
2	*6965.00	107.6 AV			1.00 H	289	62.0	45.6
3	#13930.00	57.3 PK	88.2	-30.9	1.76 H	216	47.7	9.6
4	#13930.00	49.1 AV	68.2	-19.1	1.76 H	216	39.5	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	116.2 PK			1.26 V	304	70.6	45.6
2	*6965.00	107.0 AV			1.26 V	304	61.4	45.6
3	#13930.00	57.4 PK	88.2	-30.8	2.80 V	167	47.8	9.6
4	#13930.00	48.8 AV	68.2	-19.4	2.80 V	167	39.2	9.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 227 : 7085 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	110.6 PK			1.00 H	295	64.7	45.9
2	*7085.00	102.9 AV			1.00 H	295	57.0	45.9
3	#7125.00	84.6 PK	88.2	-3.6	1.00 H	295	76.7	7.9
4	<b>#7125.00</b>	<b>66.6 AV</b>	<b>68.2</b>	<b>-1.6</b>	<b>1.00 H</b>	<b>295</b>	<b>58.7</b>	<b>7.9</b>
5	#14170.00	58.8 PK	88.2	-29.4	3.56 H	13	49.0	9.8
6	#14170.00	50.1 AV	68.2	-18.1	3.56 H	13	40.3	9.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	109.6 PK			1.00 V	96	63.7	45.9
2	*7085.00	101.9 AV			1.00 V	96	56.0	45.9
3	#7125.00	83.4 PK	88.2	-4.8	1.00 V	96	75.5	7.9
4	#7125.00	66.0 AV	68.2	-2.2	1.00 V	96	58.1	7.9
5	#14170.00	57.6 PK	88.2	-30.6	1.62 V	174	47.8	9.8
6	#14170.00	49.9 AV	68.2	-18.3	1.62 V	174	40.1	9.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 7 : 5985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5892.50	82.1 PK	88.2	-6.1	2.41 H	0	77.1	5.0
2	#5892.50	66.5 AV	68.2	-1.7	2.41 H	0	61.5	5.0
3	*5985.00	110.0 PK			2.41 H	0	67.4	42.6
4	*5985.00	100.4 AV			2.41 H	0	57.8	42.6
5	11970.00	58.7 PK	74.0	-15.3	1.53 H	265	50.1	8.6
6	11970.00	48.6 AV	54.0	-5.4	1.53 H	265	40.0	8.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5890.12	78.5 PK	88.2	-9.7	1.27 V	290	73.5	5.0
2	#5890.12	63.1 AV	68.2	-5.1	1.27 V	290	58.1	5.0
3	*5985.00	108.8 PK			1.27 V	290	66.2	42.6
4	*5985.00	99.3 AV			1.27 V	290	56.7	42.6
5	11970.00	57.4 PK	74.0	-16.6	2.25 V	134	48.8	8.6
6	11970.00	47.8 AV	54.0	-6.2	2.25 V	134	39.2	8.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 55 : 6225 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	113.5 PK			1.49 H	1	69.7	43.8
2	*6225.00	102.4 AV			1.49 H	1	58.6	43.8
3	12450.00	58.1 PK	74.0	-15.9	2.31 H	156	48.9	9.2
4	12450.00	48.0 AV	54.0	-6.0	2.31 H	156	38.8	9.2

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	113.4 PK			1.18 V	297	69.6	43.8
2	*6225.00	102.3 AV			1.18 V	297	58.5	43.8
3	12450.00	56.9 PK	74.0	-17.1	1.25 V	265	47.7	9.2
4	12450.00	47.5 AV	54.0	-6.5	1.25 V	265	38.3	9.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.4 PK			1.00 H	1	67.7	44.7
2	*6385.00	100.8 AV			1.00 H	1	56.1	44.7
3	#12770.00	54.4 PK	88.2	-33.8	1.86 H	89	44.7	9.7
4	#12770.00	46.9 AV	68.2	-21.3	1.86 H	89	37.2	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.9 PK			1.21 V	298	67.2	44.7
2	*6385.00	100.4 AV			1.21 V	298	55.7	44.7
3	#12770.00	54.4 PK	88.2	-33.8	3.02 V	325	44.7	9.7
4	#12770.00	46.5 AV	68.2	-21.7	3.02 V	325	36.8	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	112.3 PK			1.15 H	297	67.1	45.2
2	*6465.00	100.7 AV			1.15 H	297	55.5	45.2
3	#12930.00	54.4 PK	88.2	-33.8	2.43 H	140	44.8	9.6
4	#12930.00	46.9 AV	68.2	-21.3	2.43 H	140	37.3	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.7 PK			1.30 V	329	66.5	45.2
2	*6465.00	100.1 AV			1.30 V	329	54.9	45.2
3	#12930.00	53.8 PK	88.2	-34.4	3.81 V	311	44.2	9.6
4	#12930.00	46.4 AV	68.2	-21.8	3.81 V	311	36.8	9.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 119 : 6545 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	112.5 PK			1.08 H	301	67.2	45.3
2	*6545.00	100.9 AV			1.08 H	301	55.6	45.3
3	#13090.00	55.4 PK	88.2	-32.8	1.15 H	19	45.9	9.5
4	#13090.00	47.4 AV	68.2	-20.8	1.15 H	19	37.9	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	112.0 PK			1.28 V	325	66.7	45.3
2	*6545.00	100.4 AV			1.28 V	325	55.1	45.3
3	#13090.00	54.0 PK	88.2	-34.2	1.97 V	51	44.5	9.5
4	#13090.00	46.7 AV	68.2	-21.5	1.97 V	51	37.2	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 135 : 6625 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	113.4 PK			1.00 H	313	68.2	45.2
2	*6625.00	102.0 AV			1.00 H	313	56.8	45.2
3	13250.00	56.8 PK	74.0	-17.2	2.27 H	282	47.3	9.5
4	13250.00	47.3 AV	54.0	-6.7	2.27 H	282	37.8	9.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	113.0 PK			1.28 V	291	67.8	45.2
2	*6625.00	101.6 AV			1.28 V	291	56.4	45.2
3	13250.00	55.7 PK	74.0	-18.3	3.20 V	183	46.2	9.5
4	13250.00	46.9 AV	54.0	-7.1	3.20 V	183	37.4	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 151 : 6705 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	113.6 PK			1.00 H	319	68.2	45.4
2	*6705.00	102.4 AV			1.00 H	319	57.0	45.4
3	#13410.00	58.1 PK	88.2	-30.1	1.78 H	187	48.1	10.0
4	#13410.00	48.8 AV	68.2	-19.4	1.78 H	187	38.8	10.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	113.0 PK			1.33 V	293	67.6	45.4
2	*6705.00	101.8 AV			1.33 V	293	56.4	45.4
3	#13410.00	56.8 PK	88.2	-31.4	3.39 V	163	46.8	10.0
4	#13410.00	47.7 AV	68.2	-20.5	3.39 V	163	37.7	10.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 167 : 6785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.0 PK			1.00 H	318	67.7	45.3
2	*6785.00	101.8 AV			1.00 H	318	56.5	45.3
3	#7125.00	62.7 PK	88.2	-25.5	1.00 H	318	54.8	7.9
4	#7125.00	51.9 AV	68.2	-16.3	1.00 H	318	44.0	7.9
5	#13570.00	57.8 PK	88.2	-30.4	3.76 H	160	48.6	9.2
6	#13570.00	48.9 AV	68.2	-19.3	3.76 H	160	39.7	9.2

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	112.5 PK			1.35 V	291	67.2	45.3
2	*6785.00	101.3 AV			1.35 V	291	56.0	45.3
3	#7125.00	62.5 PK	88.2	-25.7	1.35 V	291	54.6	7.9
4	#7125.00	51.7 AV	68.2	-16.5	1.35 V	291	43.8	7.9
5	#13570.00	56.5 PK	88.2	-31.7	3.24 V	331	47.3	9.2
6	#13570.00	48.7 AV	68.2	-19.5	3.24 V	331	39.5	9.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 183 : 6865 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	113.1 PK			1.00 H	320	67.6	45.5
2	*6865.00	102.0 AV			1.00 H	320	56.5	45.5
3	#13730.00	56.5 PK	88.2	-31.7	3.46 H	6	47.1	9.4
4	#13730.00	48.2 AV	68.2	-20.0	3.46 H	6	38.8	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	112.5 PK			1.33 V	292	67.0	45.5
2	*6865.00	101.4 AV			1.33 V	292	55.9	45.5
3	#13730.00	56.4 PK	88.2	-31.8	2.91 V	127	47.0	9.4
4	#13730.00	47.4 AV	68.2	-20.8	2.91 V	127	38.0	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 199 : 6945 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	113.2 PK			1.00 H	298	67.6	45.6
2	*6945.00	102.1 AV			1.00 H	298	56.5	45.6
3	#13890.00	57.1 PK	88.2	-31.1	1.74 H	72	47.7	9.4
4	#13890.00	49.4 AV	68.2	-18.8	1.74 H	72	40.0	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	112.7 PK			1.31 V	292	67.1	45.6
2	*6945.00	101.5 AV			1.31 V	292	55.9	45.6
3	#13890.00	56.7 PK	88.2	-31.5	3.89 V	243	47.3	9.4
4	#13890.00	49.0 AV	68.2	-19.2	3.89 V	243	39.6	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	113.0 PK			1.00 H	295	67.2	45.8
2	*7025.00	102.0 AV			1.00 H	295	56.2	45.8
3	#7125.00	76.2 PK	88.2	-12.0	1.00 H	295	68.3	7.9
4	#7125.00	60.6 AV	68.2	-7.6	1.00 H	295	52.7	7.9
5	#14050.00	58.1 PK	88.2	-30.1	2.75 H	285	48.3	9.8
6	#14050.00	50.4 AV	68.2	-17.8	2.75 H	285	40.6	9.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	112.4 PK			1.29 V	284	66.6	45.8
2	*7025.00	101.4 AV			1.29 V	284	55.6	45.8
3	#7125.00	75.0 PK	88.2	-13.2	1.29 V	284	67.1	7.9
4	#7125.00	59.5 AV	68.2	-8.7	1.29 V	284	51.6	7.9
5	#14050.00	57.0 PK	88.2	-31.2	1.74 V	228	47.2	9.8
6	#14050.00	49.9 AV	68.2	-18.3	1.74 V	228	40.1	9.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5921.00	80.2 PK	88.2	-8.0	1.00 H	66	75.2	5.0
2	#5921.00	66.5 AV	68.2	-1.7	1.00 H	66	61.5	5.0
3	*6025.00	105.8 PK			1.00 H	66	63.1	42.7
4	*6025.00	95.2 AV			1.00 H	66	52.5	42.7
5	12050.00	55.7 PK	74.0	-18.3	2.04 H	251	47.0	8.7
6	12050.00	46.8 AV	54.0	-7.2	2.04 H	251	38.1	8.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5922.00	77.6 PK	88.2	-10.6	1.15 V	297	72.6	5.0
2	#5922.00	64.2 AV	68.2	-4.0	1.15 V	297	59.2	5.0
3	*6025.00	105.0 PK			1.15 V	297	62.3	42.7
4	*6025.00	94.5 AV			1.15 V	297	51.8	42.7
5	12050.00	55.0 PK	74.0	-19.0	2.27 V	127	46.3	8.7
6	12050.00	46.0 AV	54.0	-8.0	2.27 V	127	37.3	8.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.9 PK			1.00 H	353	62.4	43.5
2	*6185.00	96.7 AV			1.00 H	353	53.2	43.5
3	12370.00	55.1 PK	74.0	-18.9	1.53 H	281	46.0	9.1
4	12370.00	46.3 AV	54.0	-7.7	1.53 H	281	37.2	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.4 PK			1.18 V	268	61.9	43.5
2	*6185.00	96.2 AV			1.18 V	268	52.7	43.5
3	12370.00	54.2 PK	74.0	-19.8	3.81 V	295	45.1	9.1
4	12370.00	46.1 AV	54.0	-7.9	3.81 V	295	37.0	9.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.6 PK			1.00 H	1	62.2	44.4
2	*6345.00	97.4 AV			1.00 H	1	53.0	44.4
3	12690.00	55.5 PK	74.0	-18.5	1.93 H	293	45.8	9.7
4	12690.00	46.3 AV	54.0	-7.7	1.93 H	293	36.6	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.0 PK			1.17 V	269	61.6	44.4
2	*6345.00	96.8 AV			1.17 V	269	52.4	44.4
3	12690.00	54.8 PK	74.0	-19.2	2.13 V	178	45.1	9.7
4	12690.00	45.2 AV	54.0	-8.8	2.13 V	178	35.5	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	106.6 PK			1.02 H	2	61.3	45.3
2	*6505.00	92.4 AV			1.02 H	2	47.1	45.3
3	#13010.00	54.6 PK	88.2	-33.6	3.76 H	190	45.3	9.3
4	#13010.00	47.0 AV	68.2	-21.2	3.76 H	190	37.7	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	106.0 PK			1.19 V	311	60.7	45.3
2	*6505.00	91.8 AV			1.19 V	311	46.5	45.3
3	#13010.00	54.3 PK	88.2	-33.9	1.60 V	239	45.0	9.3
4	#13010.00	46.0 AV	68.2	-22.2	1.60 V	239	36.7	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.7 PK			1.00 H	318	60.3	45.4
2	*6665.00	96.5 AV			1.00 H	318	51.1	45.4
3	#7125.00	62.3 PK	88.2	-25.9	1.00 H	318	54.4	7.9
4	#7125.00	52.0 AV	68.2	-16.2	1.00 H	318	44.1	7.9
5	13330.00	57.0 PK	74.0	-17.0	2.61 H	164	47.2	9.8
6	13330.00	48.0 AV	54.0	-6.0	2.61 H	164	38.2	9.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.2 PK			1.19 V	277	59.8	45.4
2	*6665.00	96.0 AV			1.19 V	277	50.6	45.4
3	#7125.00	62.0 PK	88.2	-26.2	1.19 V	277	54.1	7.9
4	#7125.00	51.8 AV	68.2	-16.4	1.19 V	277	43.9	7.9
5	13330.00	56.3 PK	74.0	-17.7	1.46 V	312	46.5	9.8
6	13330.00	47.5 AV	54.0	-6.5	1.46 V	312	37.7	9.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 175 : 6825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.7 PK			1.00 H	297	62.4	45.3
2	*6825.00	97.6 AV			1.00 H	297	52.3	45.3
3	#13650.00	56.8 PK	88.2	-31.4	1.40 H	112	47.4	9.4
4	#13650.00	49.0 AV	68.2	-19.2	1.40 H	112	39.6	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.1 PK			1.23 V	278	61.8	45.3
2	*6825.00	97.0 AV			1.23 V	278	51.7	45.3
3	#13650.00	56.1 PK	88.2	-32.1	1.38 V	137	46.7	9.4
4	#13650.00	48.4 AV	68.2	-19.8	1.38 V	137	39.0	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.4 PK			1.00 H	297	61.8	45.6
2	*6985.00	97.2 AV			1.00 H	297	51.6	45.6
3	#7125.00	81.9 PK	88.2	-6.3	1.00 H	297	74.0	7.9
4	#7125.00	66.4 AV	68.2	-1.8	1.00 H	297	58.5	7.9
5	#13970.00	57.8 PK	88.2	-30.4	2.87 H	272	48.1	9.7
6	#13970.00	49.8 AV	68.2	-18.4	2.87 H	272	40.1	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.8 PK			1.28 V	288	61.2	45.6
2	*6985.00	96.6 AV			1.28 V	288	51.0	45.6
3	#7125.00	80.6 PK	88.2	-7.6	1.28 V	288	72.7	7.9
4	#7125.00	65.1 AV	68.2	-3.1	1.28 V	288	57.2	7.9
5	#13970.00	56.7 PK	88.2	-31.5	1.22 V	340	47.0	9.7
6	#13970.00	49.1 AV	68.2	-19.1	1.22 V	340	39.4	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

## Partial RU\_2TX

## 26-tone RU

<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 67% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5915.00	85.9 PK	88.2	-2.3	2.33 H	348	80.9	5.0
2	#5915.00	55.7 AV	68.2	-12.5	2.33 H	348	50.7	5.0
3	*5955.00	129.0 PK			2.33 H	348	86.4	42.6
4	*5955.00	116.5 AV			2.33 H	348	73.9	42.6
5	11910.00	56.8 PK	74.0	-17.2	1.18 H	306	48.3	8.5
6	11910.00	43.7 AV	54.0	-10.3	1.18 H	306	35.2	8.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5915.00	82.8 PK	88.2	-5.4	3.23 V	267	77.8	5.0
2	#5915.00	52.7 AV	68.2	-15.5	3.23 V	267	47.7	5.0
3	*5955.00	126.5 PK			3.23 V	267	83.9	42.6
4	*5955.00	114.7 AV			3.23 V	267	72.1	42.6
5	11910.00	55.8 PK	74.0	-18.2	3.16 V	274	47.3	8.5
6	11910.00	43.1 AV	54.0	-10.9	3.16 V	274	34.6	8.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 49 : 6195 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 67% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	127.9 PK			2.36 H	359	84.3	43.6
2	*6195.00	118.3 AV			2.36 H	359	74.7	43.6
3	12390.00	62.2 PK	74.0	-11.8	1.99 H	44	53.1	9.1
4	12390.00	50.0 AV	54.0	-4.0	1.99 H	44	40.9	9.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	126.3 PK			3.34 V	271	82.7	43.6
2	*6195.00	116.7 AV			3.34 V	271	73.1	43.6
3	12390.00	59.8 PK	74.0	-14.2	1.09 V	27	50.7	9.1
4	12390.00	47.6 AV	54.0	-6.4	1.09 V	27	38.5	9.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 67% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	127.9 PK			2.33 H	357	83.0	44.9
2	*6415.00	118.0 AV			2.33 H	357	73.1	44.9
3	#12830.00	62.8 PK	88.2	-25.4	1.91 H	48	53.1	9.7
4	#12830.00	50.5 AV	68.2	-17.7	1.91 H	48	40.8	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	126.1 PK			3.26 V	265	81.2	44.9
2	*6415.00	116.3 AV			3.26 V	265	71.4	44.9
3	#12830.00	60.5 PK	88.2	-27.7	1.18 V	40	50.8	9.7
4	#12830.00	48.1 AV	68.2	-20.1	1.18 V	40	38.4	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 67% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	128.0 PK			2.17 H	350	82.9	45.1
2	*6435.00	118.5 AV			2.17 H	350	73.4	45.1
3	#12870.00	62.4 PK	88.2	-25.8	1.93 H	53	52.7	9.7
4	#12870.00	50.4 AV	68.2	-17.8	1.93 H	53	40.7	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	126.3 PK			3.36 V	256	81.2	45.1
2	*6435.00	116.7 AV			3.36 V	256	71.6	45.1
3	#12870.00	60.1 PK	88.2	-28.1	1.14 V	45	50.4	9.7
4	#12870.00	48.1 AV	68.2	-20.1	1.14 V	45	38.4	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 67% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	128.5 PK			2.40 H	3	83.2	45.3
2	*6475.00	118.6 AV			2.40 H	3	73.3	45.3
3	#12950.00	62.0 PK	88.2	-26.2	1.97 H	49	52.5	9.5
4	#12950.00	50.9 AV	68.2	-17.3	1.97 H	49	41.4	9.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	126.7 PK			3.30 V	263	81.4	45.3
2	*6475.00	116.8 AV			3.30 V	263	71.5	45.3
3	#12950.00	60.4 PK	88.2	-27.8	1.12 V	43	50.9	9.5
4	#12950.00	48.6 AV	68.2	-19.6	1.12 V	43	39.1	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	129.3 PK			2.43 H	351	84.0	45.3
2	*6515.00	119.6 AV			2.43 H	351	74.3	45.3
3	#13030.00	64.6 PK	88.2	-23.6	2.17 H	59	55.3	9.3
4	#13030.00	52.4 AV	68.2	-15.8	2.17 H	59	43.1	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	127.4 PK			3.17 V	252	82.1	45.3
2	*6515.00	117.8 AV			3.17 V	252	72.5	45.3
3	#13030.00	62.6 PK	88.2	-25.6	1.16 V	37	53.3	9.3
4	#13030.00	50.0 AV	68.2	-18.2	1.16 V	37	40.7	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	128.4 PK			2.19 H	4	83.1	45.3
2	*6535.00	118.5 AV			2.19 H	4	73.2	45.3
3	#13070.00	65.1 PK	88.2	-23.1	1.97 H	56	55.7	9.4
4	#13070.00	52.5 AV	68.2	-15.7	1.97 H	56	43.1	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	126.6 PK			3.17 V	248	81.3	45.3
2	*6535.00	116.8 AV			3.17 V	248	71.5	45.3
3	#13070.00	62.0 PK	88.2	-26.2	1.13 V	34	52.6	9.4
4	#13070.00	50.2 AV	68.2	-18.0	1.13 V	34	40.8	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	127.8 PK			2.21 H	358	82.4	45.4
2	*6695.00	118.2 AV			2.21 H	358	72.8	45.4
3	13390.00	62.4 PK	74.0	-11.6	2.02 H	59	52.3	10.1
4	13390.00	49.5 AV	54.0	-4.5	2.02 H	59	39.4	10.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	126.2 PK			3.16 V	248	80.8	45.4
2	*6695.00	116.5 AV			3.16 V	248	71.1	45.4
3	13390.00	60.3 PK	74.0	-13.7	1.18 V	41	50.2	10.1
4	13390.00	47.3 AV	54.0	-6.7	1.18 V	41	37.2	10.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	129.0 PK			2.32 H	1	83.5	45.5
2	*6855.00	119.4 AV			2.32 H	1	73.9	45.5
3	#13710.00	64.0 PK	88.2	-24.2	2.01 H	62	54.6	9.4
4	#13710.00	52.2 AV	68.2	-16.0	2.01 H	62	42.8	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	127.2 PK			3.14 V	261	81.7	45.5
2	*6855.00	117.6 AV			3.14 V	261	72.1	45.5
3	#13710.00	61.8 PK	88.2	-26.4	1.13 V	51	52.4	9.4
4	#13710.00	49.9 AV	68.2	-18.3	1.13 V	51	40.5	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	128.3 PK			2.28 H	1	82.8	45.5
2	*6875.00	118.8 AV			2.28 H	1	73.3	45.5
3	#13750.00	63.8 PK	88.2	-24.4	2.16 H	59	54.5	9.3
4	#13750.00	51.9 AV	68.2	-16.3	2.16 H	59	42.6	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	126.6 PK			3.24 V	259	81.1	45.5
2	*6875.00	117.0 AV			3.24 V	259	71.5	45.5
3	#13750.00	61.5 PK	88.2	-26.7	1.19 V	36	52.2	9.3
4	#13750.00	49.6 AV	68.2	-18.6	1.19 V	36	40.3	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	128.7 PK			2.32 H	359	83.1	45.6
2	*6995.00	118.9 AV			2.32 H	359	73.3	45.6
3	#13990.00	63.3 PK	88.2	-24.9	2.01 H	58	53.4	9.9
4	#13990.00	51.1 AV	68.2	-17.1	2.01 H	58	41.2	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	127.0 PK			3.13 V	259	81.4	45.6
2	*6995.00	117.2 AV			3.13 V	259	71.6	45.6
3	#13990.00	61.4 PK	88.2	-26.8	1.16 V	29	51.5	9.9
4	#13990.00	48.9 AV	68.2	-19.3	1.16 V	29	39.0	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	107.0 PK			2.11 H	357	61.2	45.8
2	*7115.00	97.3 AV			2.11 H	357	51.5	45.8
3	#7125.00	79.0 PK	88.2	-9.2	2.11 H	357	71.1	7.9
4	#7125.00	66.4 AV	68.2	-1.8	2.11 H	357	58.5	7.9
5	#14230.00	59.3 PK	88.2	-28.9	2.13 H	66	49.4	9.9
6	#14230.00	47.7 AV	68.2	-20.5	2.13 H	66	37.8	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	105.9 PK			3.17 V	245	60.1	45.8
2	*7115.00	95.6 AV			3.17 V	245	49.8	45.8
3	#7125.00	77.3 PK	88.2	-10.9	3.17 V	245	69.4	7.9
4	#7125.00	65.7 AV	68.2	-2.5	3.17 V	245	57.8	7.9
5	#14230.00	58.5 PK	88.2	-29.7	1.18 V	33	48.6	9.9
6	#14230.00	46.1 AV	68.2	-22.1	1.18 V	33	36.2	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

**52-tone RU**

<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 67% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5918.00	84.8 PK	88.2	-3.4	2.25 H	356	79.8	5.0
2	#5918.00	54.9 AV	68.2	-13.3	2.25 H	356	49.9	5.0
3	*5955.00	125.5 PK			2.25 H	356	82.9	42.6
4	*5955.00	114.2 AV			2.25 H	356	71.6	42.6
5	11910.00	56.7 PK	74.0	-17.3	1.21 H	301	48.2	8.5
6	11910.00	43.4 AV	54.0	-10.6	1.21 H	301	34.9	8.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5918.00	83.3 PK	88.2	-4.9	3.22 V	257	78.3	5.0
2	#5918.00	52.8 AV	68.2	-15.4	3.22 V	257	47.8	5.0
3	*5955.00	123.5 PK			3.22 V	257	80.9	42.6
4	*5955.00	112.4 AV			3.22 V	257	69.8	42.6
5	11910.00	55.7 PK	74.0	-18.3	3.10 V	269	47.2	8.5
6	11910.00	43.0 AV	54.0	-11.0	3.10 V	269	34.5	8.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 49 : 6195 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 67% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	125.2 PK			2.42 H	350	81.6	43.6
2	*6195.00	115.3 AV			2.42 H	350	71.7	43.6
3	12390.00	60.9 PK	74.0	-13.1	1.92 H	37	51.8	9.1
4	12390.00	48.4 AV	54.0	-5.6	1.92 H	37	39.3	9.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	123.5 PK			3.22 V	264	79.9	43.6
2	*6195.00	113.7 AV			3.22 V	264	70.1	43.6
3	12390.00	58.4 PK	74.0	-15.6	1.08 V	33	49.3	9.1
4	12390.00	46.0 AV	54.0	-8.0	1.08 V	33	36.9	9.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.





<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 67% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	124.7 PK			2.35 H	355	79.8	44.9
2	*6415.00	115.0 AV			2.35 H	355	70.1	44.9
3	#12830.00	60.9 PK	88.2	-27.3	2.03 H	47	51.2	9.7
4	#12830.00	48.5 AV	68.2	-19.7	2.03 H	47	38.8	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.1 PK			3.23 V	254	78.2	44.9
2	*6415.00	113.4 AV			3.23 V	254	68.5	44.9
3	#12830.00	58.3 PK	88.2	-29.9	1.07 V	33	48.6	9.7
4	#12830.00	46.0 AV	68.2	-22.2	1.07 V	33	36.3	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 67% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	125.7 PK			2.39 H	3	80.6	45.1
2	*6435.00	115.8 AV			2.39 H	3	70.7	45.1
3	#12870.00	61.4 PK	88.2	-26.8	2.03 H	41	51.7	9.7
4	#12870.00	48.8 AV	68.2	-19.4	2.03 H	41	39.1	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	123.9 PK			3.32 V	273	78.8	45.1
2	*6435.00	114.1 AV			3.32 V	273	69.0	45.1
3	#12870.00	58.8 PK	88.2	-29.4	1.08 V	36	49.1	9.7
4	#12870.00	46.4 AV	68.2	-21.8	1.08 V	36	36.7	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	126.5 PK			2.41 H	350	81.2	45.3
2	*6475.00	116.4 AV			2.41 H	350	71.1	45.3
3	#12950.00	61.8 PK	88.2	-26.4	2.06 H	43	52.3	9.5
4	#12950.00	49.1 AV	68.2	-19.1	2.06 H	43	39.6	9.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	124.7 PK			3.12 V	258	79.4	45.3
2	*6475.00	114.6 AV			3.12 V	258	69.3	45.3
3	#12950.00	59.2 PK	88.2	-29.0	1.16 V	27	49.7	9.5
4	#12950.00	46.8 AV	68.2	-21.4	1.16 V	27	37.3	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	126.7 PK			2.47 H	353	81.4	45.3
2	*6515.00	116.7 AV			2.47 H	353	71.4	45.3
3	#13030.00	62.8 PK	88.2	-25.4	1.97 H	59	53.5	9.3
4	#13030.00	51.3 AV	68.2	-16.9	1.97 H	59	42.0	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	125.1 PK			3.13 V	245	79.8	45.3
2	*6515.00	115.0 AV			3.13 V	245	69.7	45.3
3	#13030.00	61.2 PK	88.2	-27.0	1.15 V	29	51.9	9.3
4	#13030.00	49.1 AV	68.2	-19.1	1.15 V	29	39.8	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	126.9 PK			2.51 H	352	81.6	45.3
2	*6535.00	116.6 AV			2.51 H	352	71.3	45.3
3	#13070.00	63.8 PK	88.2	-24.4	2.12 H	54	54.4	9.4
4	#13070.00	52.0 AV	68.2	-16.2	2.12 H	54	42.6	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	125.1 PK			3.13 V	259	79.8	45.3
2	*6535.00	114.9 AV			3.13 V	259	69.6	45.3
3	#13070.00	61.8 PK	88.2	-26.4	1.17 V	32	52.4	9.4
4	#13070.00	49.7 AV	68.2	-18.5	1.17 V	32	40.3	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	127.2 PK			2.23 H	2	81.8	45.4
2	*6695.00	116.8 AV			2.23 H	2	71.4	45.4
3	13390.00	61.0 PK	74.0	-13.0	1.98 H	58	50.9	10.1
4	13390.00	48.6 AV	54.0	-5.4	1.98 H	58	38.5	10.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	125.6 PK			3.18 V	245	80.2	45.4
2	*6695.00	115.1 AV			3.18 V	245	69.7	45.4
3	13390.00	59.7 PK	74.0	-14.3	1.16 V	31	49.6	10.1
4	13390.00	46.5 AV	54.0	-7.5	1.16 V	31	36.4	10.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	126.7 PK			2.23 H	356	81.2	45.5
2	*6855.00	116.6 AV			2.23 H	356	71.1	45.5
3	#13710.00	62.5 PK	88.2	-25.7	2.06 H	62	53.1	9.4
4	#13710.00	51.4 AV	68.2	-16.8	2.06 H	62	42.0	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	125.0 PK			3.13 V	256	79.5	45.5
2	*6855.00	114.9 AV			3.13 V	256	69.4	45.5
3	#13710.00	60.9 PK	88.2	-27.3	1.11 V	53	51.5	9.4
4	#13710.00	49.0 AV	68.2	-19.2	1.11 V	53	39.6	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	126.4 PK			2.23 H	1	80.9	45.5
2	*6875.00	116.8 AV			2.23 H	1	71.3	45.5
3	#13750.00	62.6 PK	88.2	-25.6	2.03 H	59	53.3	9.3
4	#13750.00	51.4 AV	68.2	-16.8	2.03 H	59	42.1	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	124.7 PK			3.23 V	262	79.2	45.5
2	*6875.00	115.1 AV			3.23 V	262	69.6	45.5
3	#13750.00	61.1 PK	88.2	-27.1	1.13 V	27	51.8	9.3
4	#13750.00	49.0 AV	68.2	-19.2	1.13 V	27	39.7	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	125.9 PK			2.42 H	359	80.3	45.6
2	*6995.00	115.4 AV			2.42 H	359	69.8	45.6
3	#13990.00	63.2 PK	88.2	-25.0	2.06 H	64	53.3	9.9
4	#13990.00	50.7 AV	68.2	-17.5	2.06 H	64	40.8	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	124.0 PK			3.15 V	259	78.4	45.6
2	*6995.00	113.6 AV			3.15 V	259	68.0	45.6
3	#13990.00	60.8 PK	88.2	-27.4	1.13 V	37	50.9	9.9
4	#13990.00	48.4 AV	68.2	-19.8	1.13 V	37	38.5	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	114.6 PK			2.04 H	358	68.8	45.8
2	*7115.00	102.4 AV			2.04 H	358	56.6	45.8
3	#7125.00	79.4 PK	88.2	-8.8	2.04 H	358	71.5	7.9
4	#7125.00	66.2 AV	68.2	-2.0	2.04 H	358	58.3	7.9
5	#14230.00	59.7 PK	88.2	-28.5	2.04 H	59	49.8	9.9
6	#14230.00	48.5 AV	68.2	-19.7	2.04 H	59	38.6	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	112.9 PK			3.20 V	263	67.1	45.8
2	*7115.00	100.7 AV			3.20 V	263	54.9	45.8
3	#7125.00	78.1 PK	88.2	-10.1	3.20 V	263	70.2	7.9
4	#7125.00	65.2 AV	68.2	-3.0	3.20 V	263	57.3	7.9
5	#14230.00	58.6 PK	88.2	-29.6	1.15 V	67	48.7	9.9
6	#14230.00	46.2 AV	68.2	-22.0	1.15 V	67	36.3	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

**106-tone RU**

<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 67% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.9 PK	88.2	-3.3	2.36 H	348	79.9	5.0
2	#5925.00	50.3 AV	68.2	-17.9	2.36 H	348	45.3	5.0
3	*5955.00	122.2 PK			2.36 H	348	79.6	42.6
4	*5955.00	111.5 AV			2.36 H	348	68.9	42.6
5	11910.00	56.9 PK	74.0	-17.1	1.14 H	309	48.4	8.5
6	11910.00	43.6 AV	54.0	-10.4	1.14 H	309	35.1	8.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.2 PK	88.2	-5.0	3.26 V	264	78.2	5.0
2	#5925.00	49.5 AV	68.2	-18.7	3.26 V	264	44.5	5.0
3	*5955.00	119.6 PK			3.26 V	264	77.0	42.6
4	*5955.00	109.8 AV			3.26 V	264	67.2	42.6
5	11910.00	55.9 PK	74.0	-18.1	3.13 V	281	47.4	8.5
6	11910.00	43.0 AV	54.0	-11.0	3.13 V	281	34.5	8.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 49 : 6195 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 67% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	123.4 PK			2.61 H	350	79.8	43.6
2	*6195.00	113.1 AV			2.61 H	350	69.5	43.6
3	12390.00	59.7 PK	74.0	-14.3	1.93 H	44	50.6	9.1
4	12390.00	47.3 AV	54.0	-6.7	1.93 H	44	38.2	9.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.8 PK			3.17 V	256	78.2	43.6
2	*6195.00	111.4 AV			3.17 V	256	67.8	43.6
3	12390.00	57.8 PK	74.0	-16.2	1.13 V	34	48.7	9.1
4	12390.00	45.4 AV	54.0	-8.6	1.13 V	34	36.3	9.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 67% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.6 PK			2.37 H	355	77.7	44.9
2	*6415.00	112.5 AV			2.37 H	355	67.6	44.9
3	#12830.00	59.2 PK	88.2	-29.0	1.98 H	50	49.5	9.7
4	#12830.00	47.0 AV	68.2	-21.2	1.98 H	50	37.3	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.8 PK			3.17 V	269	75.9	44.9
2	*6415.00	110.7 AV			3.17 V	269	65.8	44.9
3	#12830.00	58.4 PK	88.2	-29.8	1.16 V	37	48.7	9.7
4	#12830.00	45.9 AV	68.2	-22.3	1.16 V	37	36.2	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 67% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	123.2 PK			2.58 H	357	78.1	45.1
2	*6435.00	112.8 AV			2.58 H	357	67.7	45.1
3	#12870.00	59.8 PK	88.2	-28.4	1.92 H	48	50.1	9.7
4	#12870.00	47.5 AV	68.2	-20.7	1.92 H	48	37.8	9.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	121.4 PK			3.38 V	268	76.3	45.1
2	*6435.00	111.1 AV			3.38 V	268	66.0	45.1
3	#12870.00	58.5 PK	88.2	-29.7	1.12 V	25	48.8	9.7
4	#12870.00	46.0 AV	68.2	-22.2	1.12 V	25	36.3	9.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	124.6 PK			2.45 H	352	79.3	45.3
2	*6475.00	114.5 AV			2.45 H	352	69.2	45.3
3	#12950.00	59.6 PK	88.2	-28.6	1.96 H	55	50.1	9.5
4	#12950.00	47.9 AV	68.2	-20.3	1.96 H	55	38.4	9.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.9 PK			3.17 V	259	77.6	45.3
2	*6475.00	112.8 AV			3.17 V	259	67.5	45.3
3	#12950.00	58.3 PK	88.2	-29.9	1.17 V	36	48.8	9.5
4	#12950.00	45.8 AV	68.2	-22.4	1.17 V	36	36.3	9.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	124.7 PK			2.43 H	352	79.4	45.3
2	*6515.00	114.2 AV			2.43 H	352	68.9	45.3
3	#13030.00	61.7 PK	88.2	-26.5	2.06 H	61	52.4	9.3
4	#13030.00	49.1 AV	68.2	-19.1	2.06 H	61	39.8	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	122.9 PK			3.18 V	249	77.6	45.3
2	*6515.00	112.5 AV			3.18 V	249	67.2	45.3
3	#13030.00	59.4 PK	88.2	-28.8	1.18 V	35	50.1	9.3
4	#13030.00	46.6 AV	68.2	-21.6	1.18 V	35	37.3	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.





<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 70% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.8 PK			2.32 H	352	78.5	45.3
2	*6535.00	113.8 AV			2.32 H	352	68.5	45.3
3	#13070.00	62.5 PK	88.2	-25.7	1.97 H	58	53.1	9.4
4	#13070.00	50.0 AV	68.2	-18.2	1.97 H	58	40.6	9.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.1 PK			3.21 V	254	76.8	45.3
2	*6535.00	112.1 AV			3.21 V	254	66.8	45.3
3	#13070.00	60.2 PK	88.2	-28.0	2.18 V	59	50.8	9.4
4	#13070.00	47.7 AV	68.2	-20.5	2.18 V	59	38.3	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	124.3 PK			2.22 H	2	78.9	45.4
2	*6695.00	114.0 AV			2.22 H	2	68.6	45.4
3	13390.00	60.8 PK	74.0	-13.2	2.07 H	54	50.7	10.1
4	13390.00	47.8 AV	54.0	-6.2	2.07 H	54	37.7	10.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.7 PK			3.16 V	249	77.3	45.4
2	*6695.00	112.3 AV			3.16 V	249	66.9	45.4
3	13390.00	58.9 PK	74.0	-15.1	1.15 V	30	48.8	10.1
4	13390.00	46.4 AV	54.0	-7.6	1.15 V	30	36.3	10.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	125.0 PK			2.31 H	1	79.5	45.5
2	*6855.00	114.2 AV			2.31 H	1	68.7	45.5
3	#13710.00	62.1 PK	88.2	-26.1	2.12 H	48	52.7	9.4
4	#13710.00	49.3 AV	68.2	-18.9	2.12 H	48	39.9	9.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	123.0 PK			3.13 V	254	77.5	45.5
2	*6855.00	112.4 AV			3.13 V	254	66.9	45.5
3	#13710.00	60.1 PK	88.2	-28.1	1.21 V	48	50.7	9.4
4	#13710.00	47.1 AV	68.2	-21.1	1.21 V	48	37.7	9.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	124.3 PK			2.29 H	359	78.8	45.5
2	*6875.00	114.2 AV			2.29 H	359	68.7	45.5
3	#13750.00	61.8 PK	88.2	-26.4	2.12 H	59	52.5	9.3
4	#13750.00	49.0 AV	68.2	-19.2	2.12 H	59	39.7	9.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	122.6 PK			3.19 V	256	77.1	45.5
2	*6875.00	112.5 AV			3.19 V	256	67.0	45.5
3	#13750.00	59.8 PK	88.2	-28.4	1.12 V	33	50.5	9.3
4	#13750.00	46.9 AV	68.2	-21.3	1.12 V	33	37.6	9.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	122.7 PK			2.19 H	359	77.1	45.6
2	*6995.00	112.1 AV			2.19 H	359	66.5	45.6
3	#13990.00	61.2 PK	88.2	-27.0	2.06 H	52	51.3	9.9
4	#13990.00	48.7 AV	68.2	-19.5	2.06 H	52	38.8	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	121.0 PK			3.21 V	259	75.4	45.6
2	*6995.00	110.4 AV			3.21 V	259	64.8	45.6
3	#13990.00	58.6 PK	88.2	-29.6	1.14 V	23	48.7	9.9
4	#13990.00	46.2 AV	68.2	-22.0	1.14 V	23	36.3	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 68% RH
<b>Tested By</b>	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	114.4 PK			2.06 H	1	68.6	45.8
2	*7115.00	103.0 AV			2.06 H	1	57.2	45.8
3	#7125.00	78.2 PK	88.2	-10.0	2.06 H	1	70.3	7.9
<b>4</b>	<b>#7125.00</b>	<b>66.5 AV</b>	<b>68.2</b>	<b>-1.7</b>	<b>2.06 H</b>	<b>1</b>	<b>58.6</b>	<b>7.9</b>
5	#14230.00	61.4 PK	88.2	-26.8	2.11 H	72	51.5	9.9
6	#14230.00	49.0 AV	68.2	-19.2	2.11 H	72	39.1	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	112.5 PK			3.19 V	263	66.7	45.8
2	*7115.00	101.2 AV			3.19 V	263	55.4	45.8
3	#7125.00	77.1 PK	88.2	-11.1	3.19 V	263	69.2	7.9
4	#7125.00	65.2 AV	68.2	-3.0	3.19 V	263	57.3	7.9
5	#14230.00	58.7 PK	88.2	-29.5	1.21 V	59	48.8	9.9
6	#14230.00	46.3 AV	68.2	-21.9	1.21 V	59	36.4	9.9


**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

# Plot of Band Edge


1TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

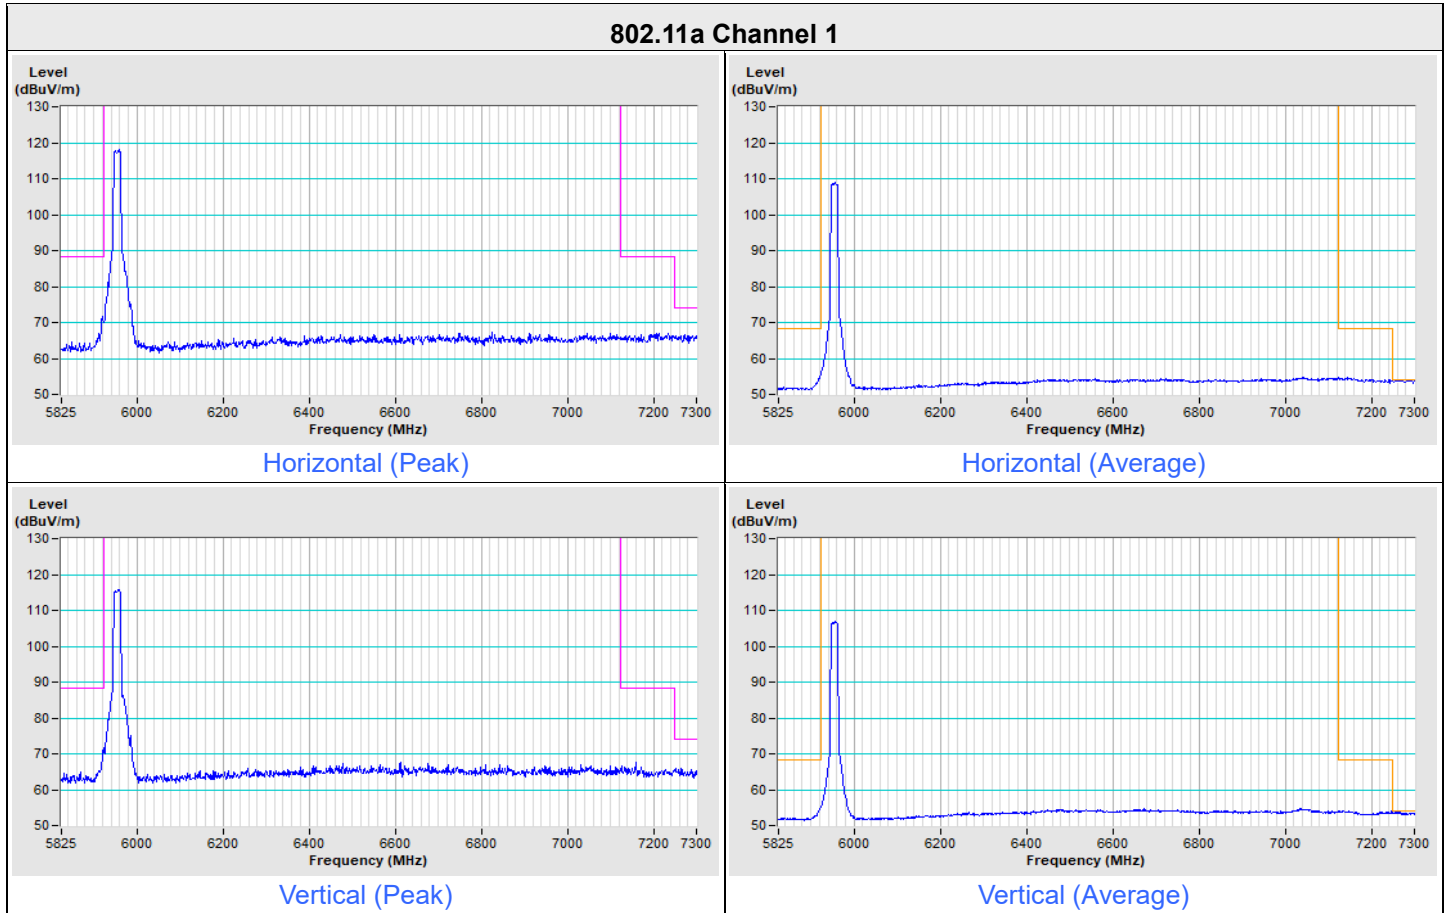


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

**802.11a Channel 233**

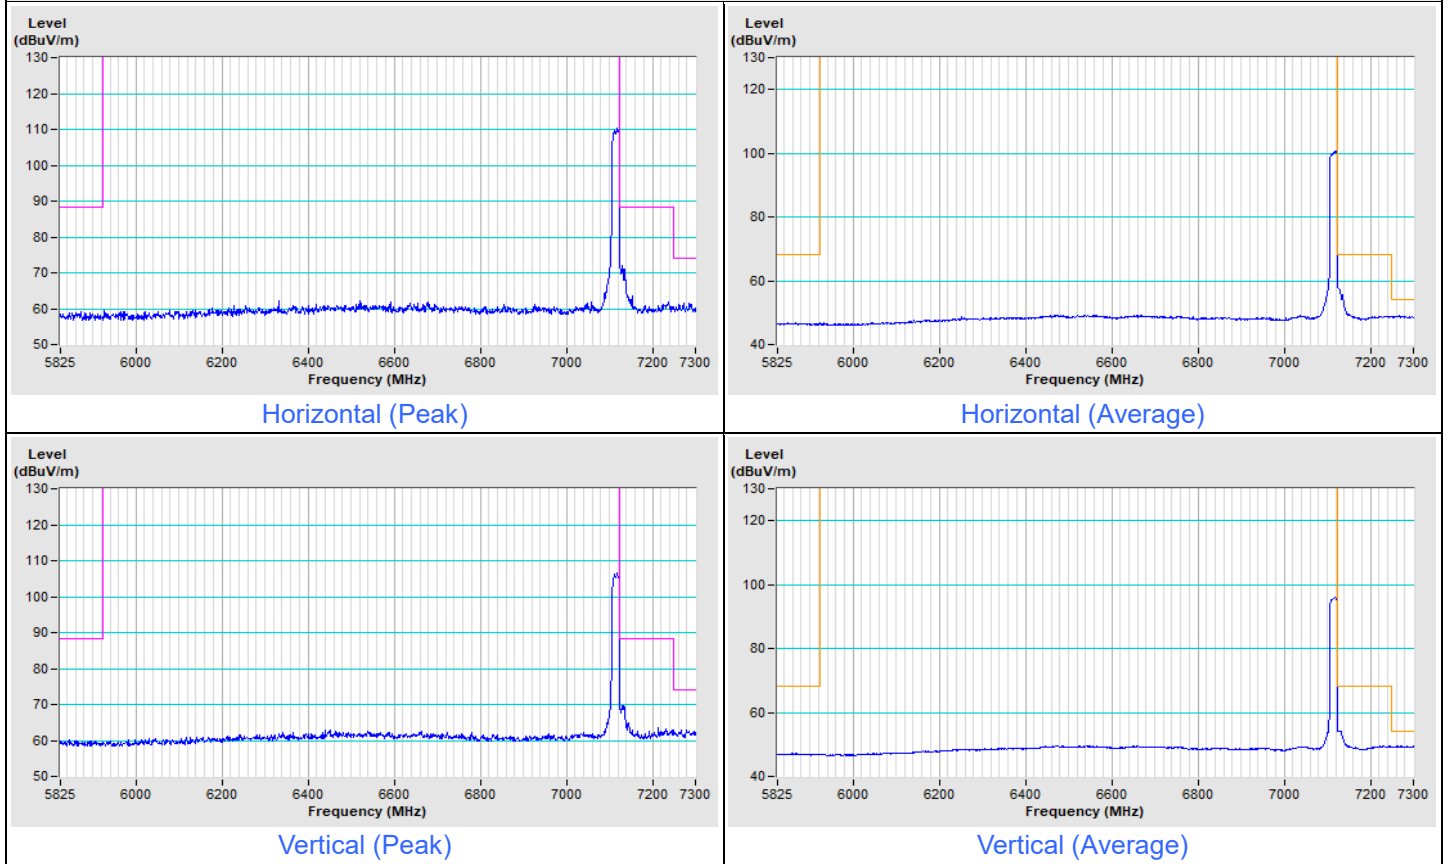





### 802.11be (EHT20) Channel 1

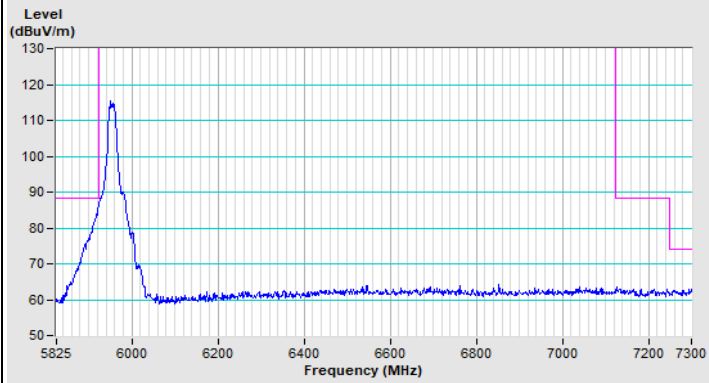


Horizontal (Peak)

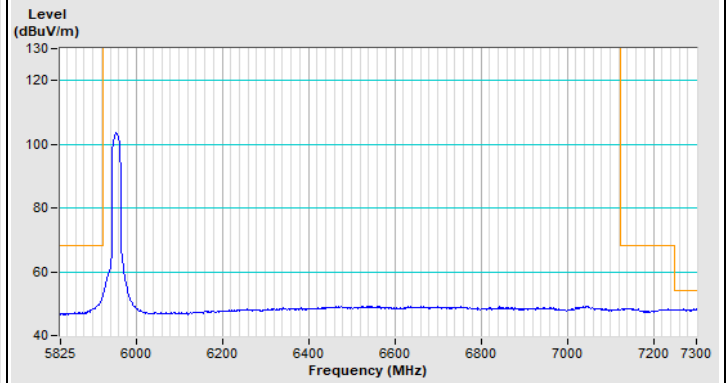

Horizontal (Average)

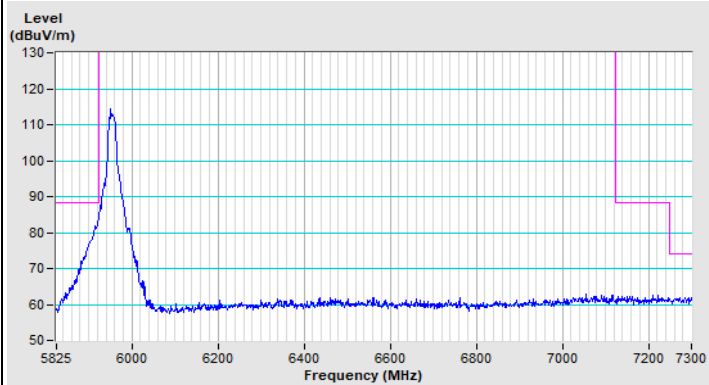


Vertical (Peak)

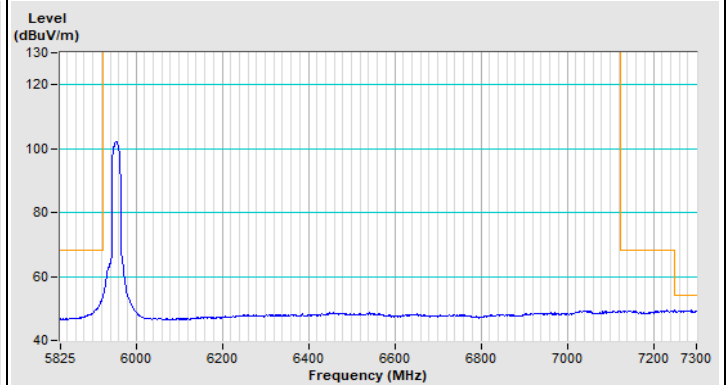

Vertical (Average)




### 802.11be (EHT20) Channel 233

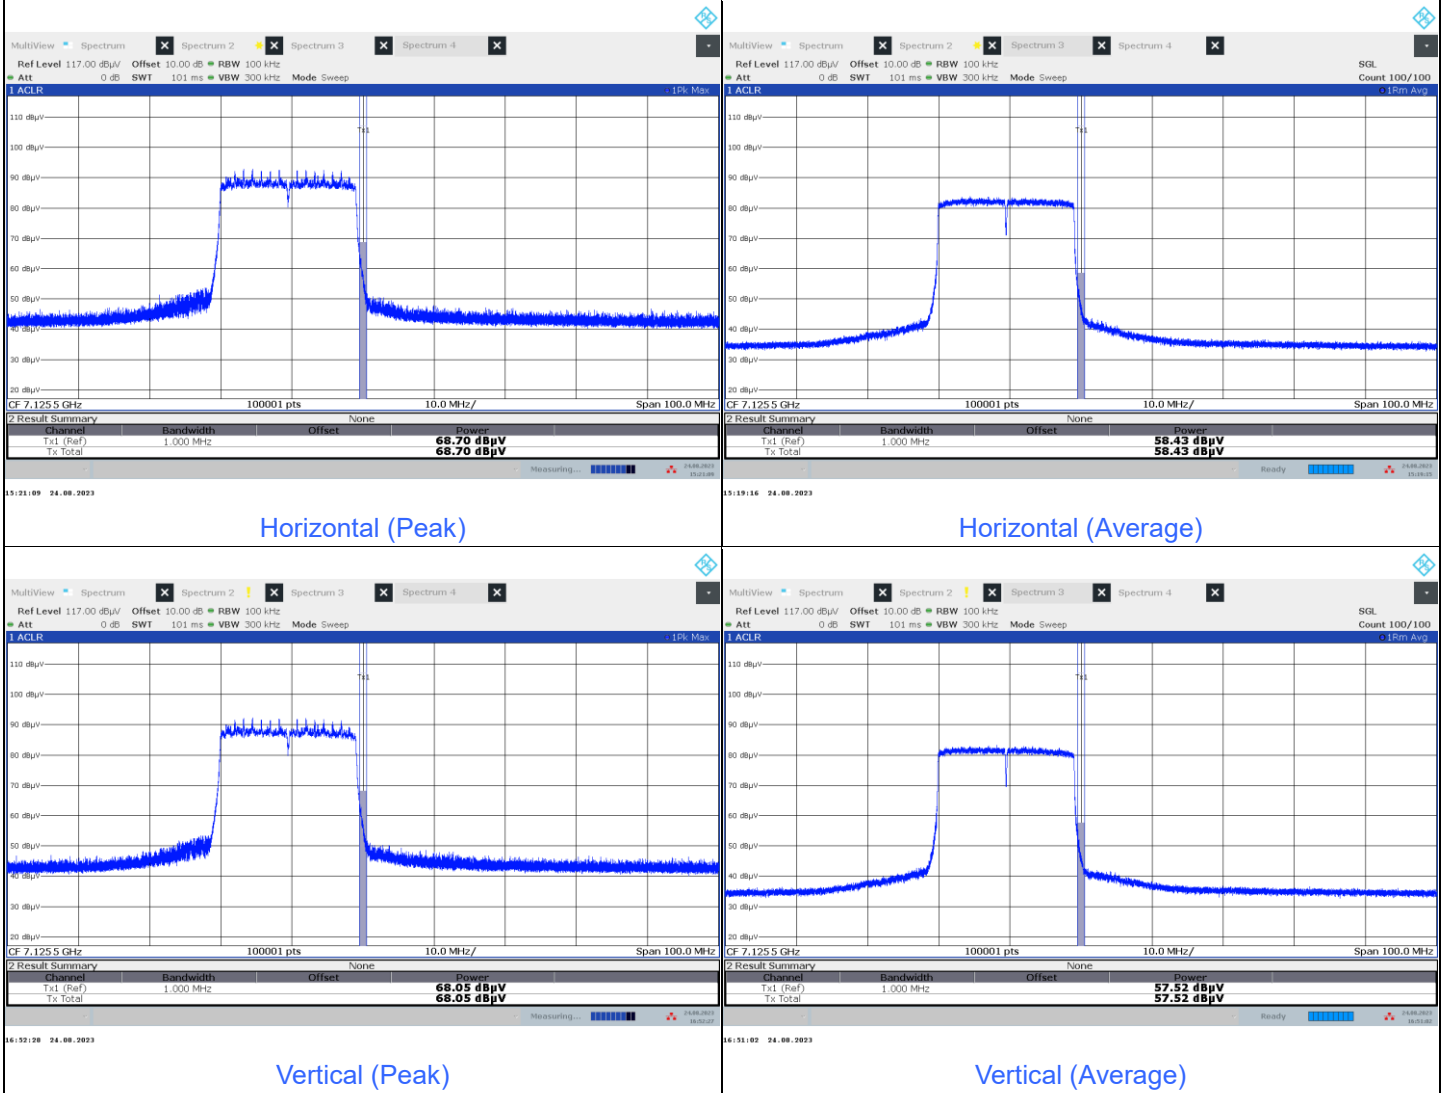


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

### 802.11be (EHT40) Channel 3

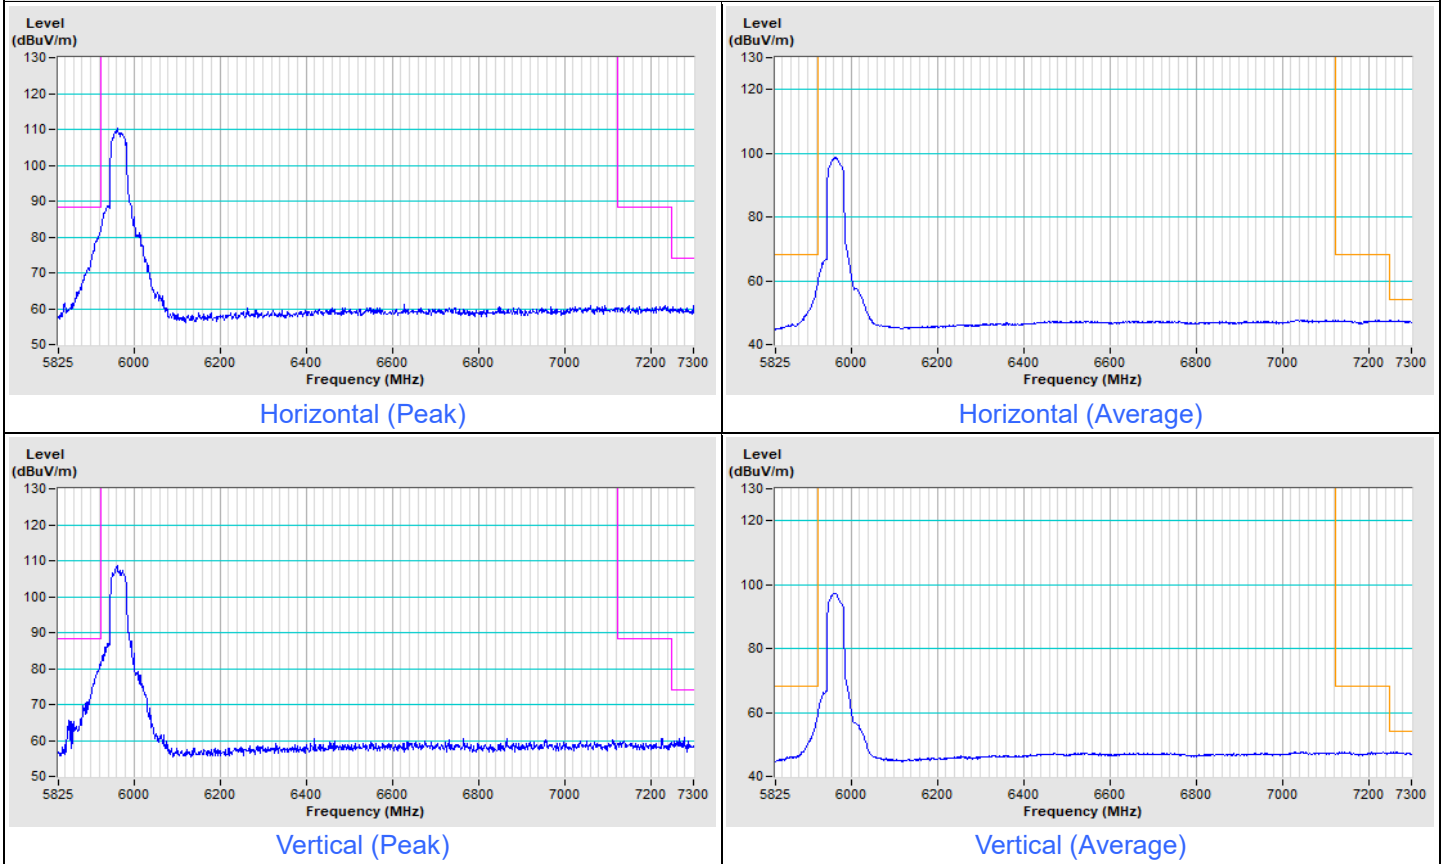


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

**802.11be (EHT40) Channel 227**

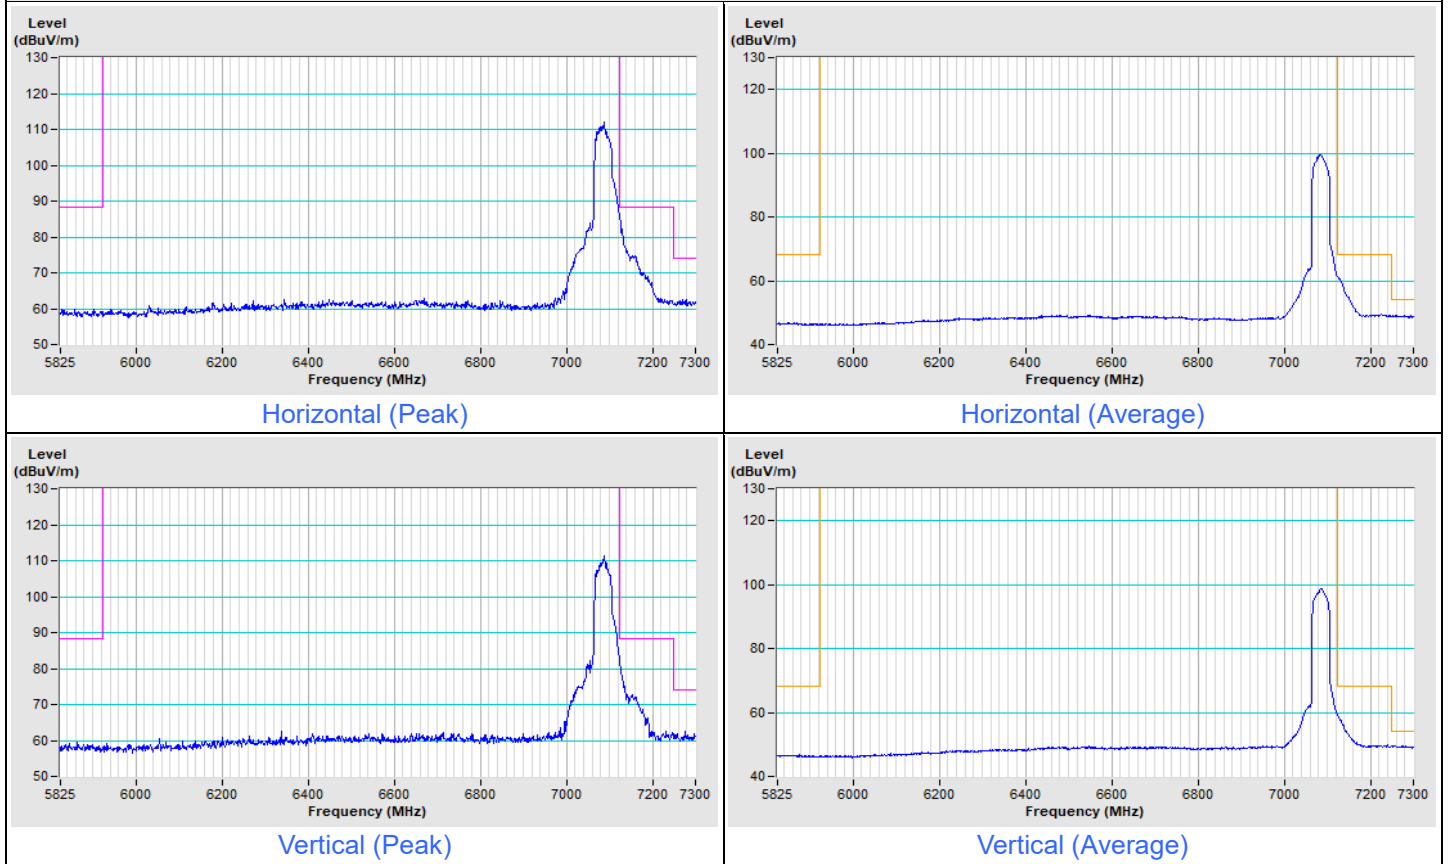


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

### 802.11be (EHT80) Channel 7

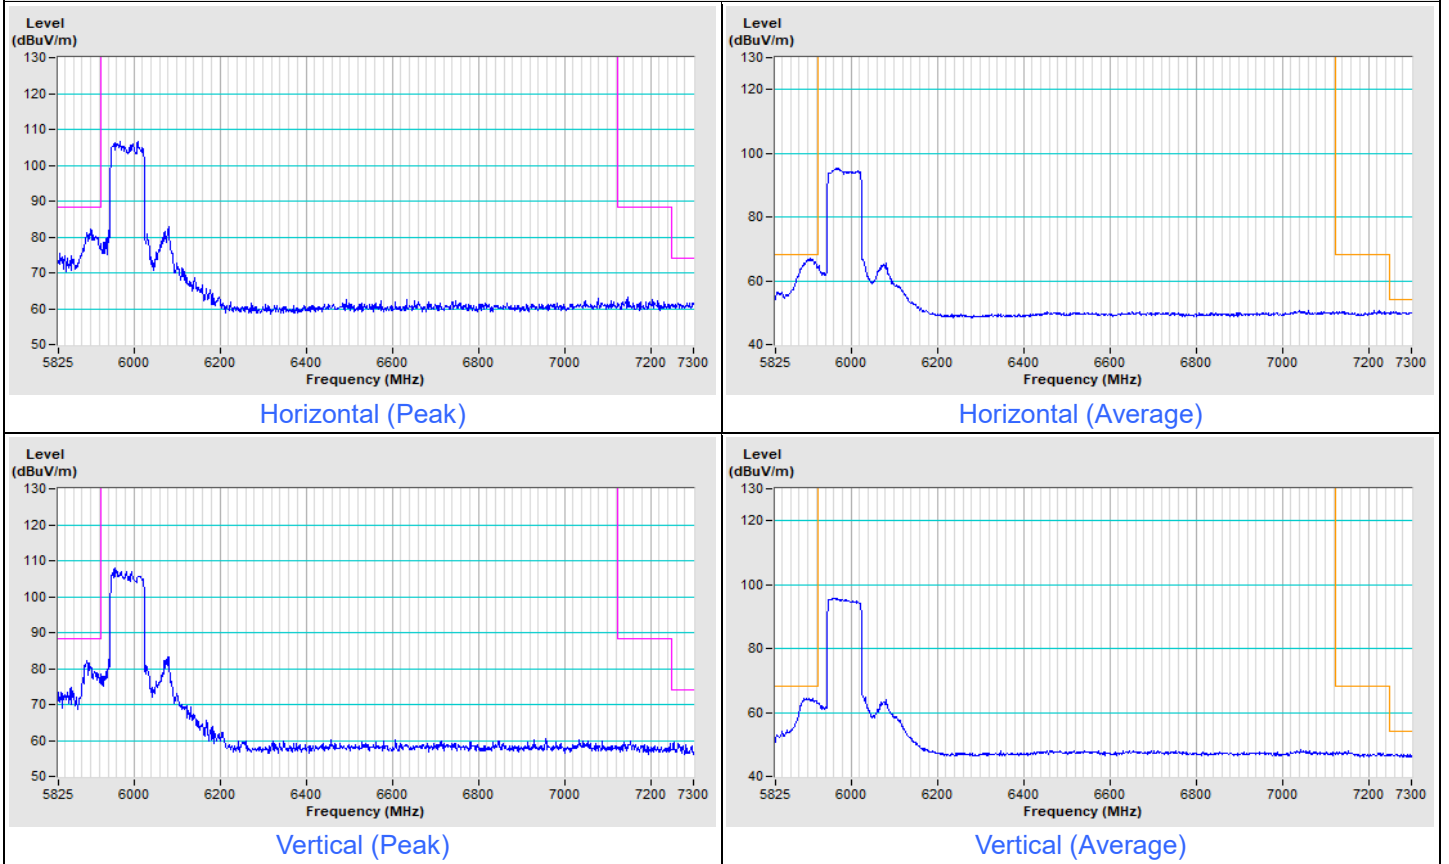


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

### 802.11be (EHT80) Channel 215

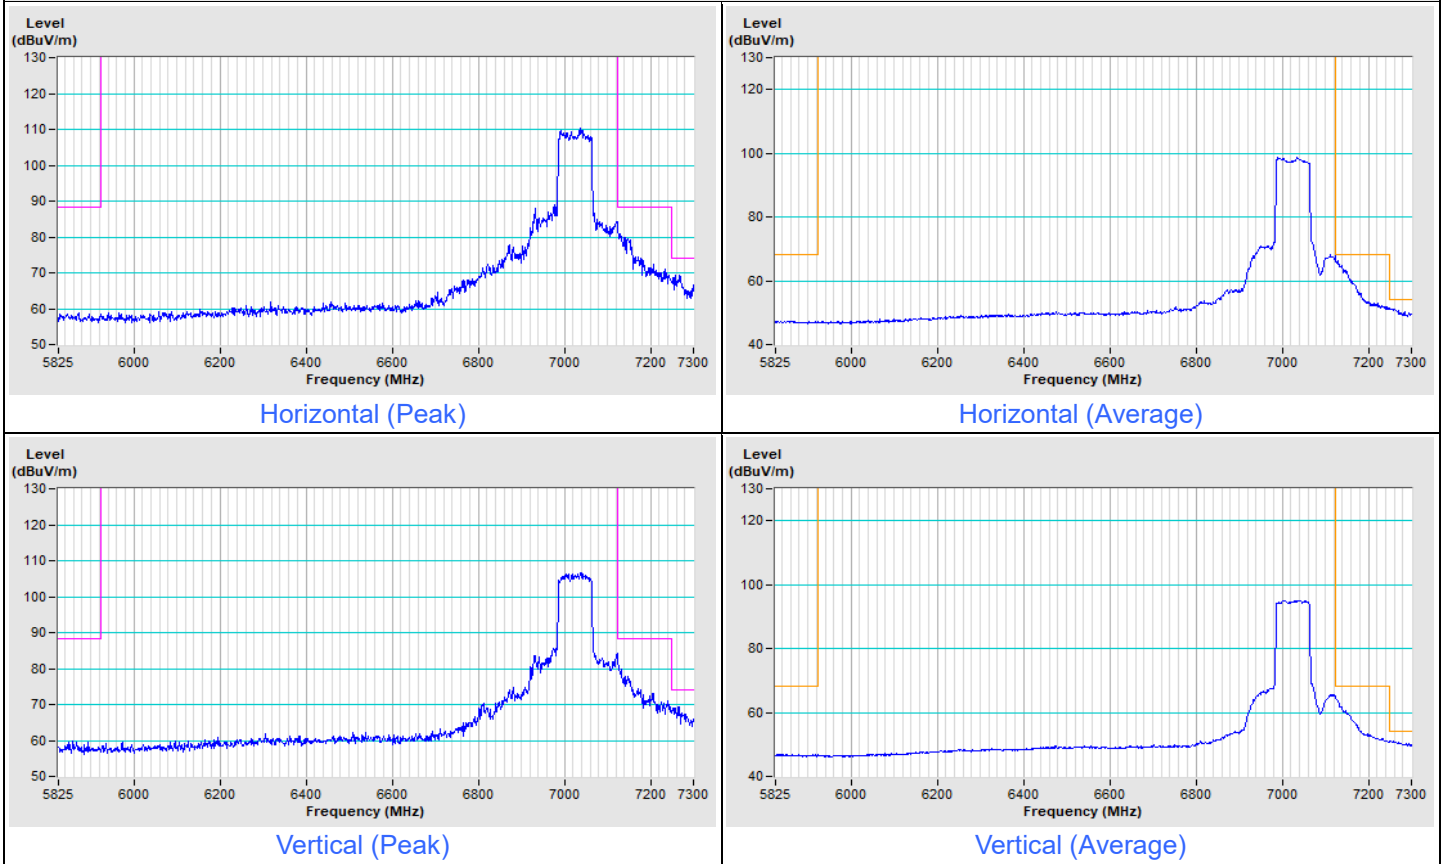


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

**802.11be (EHT160) Channel 15**

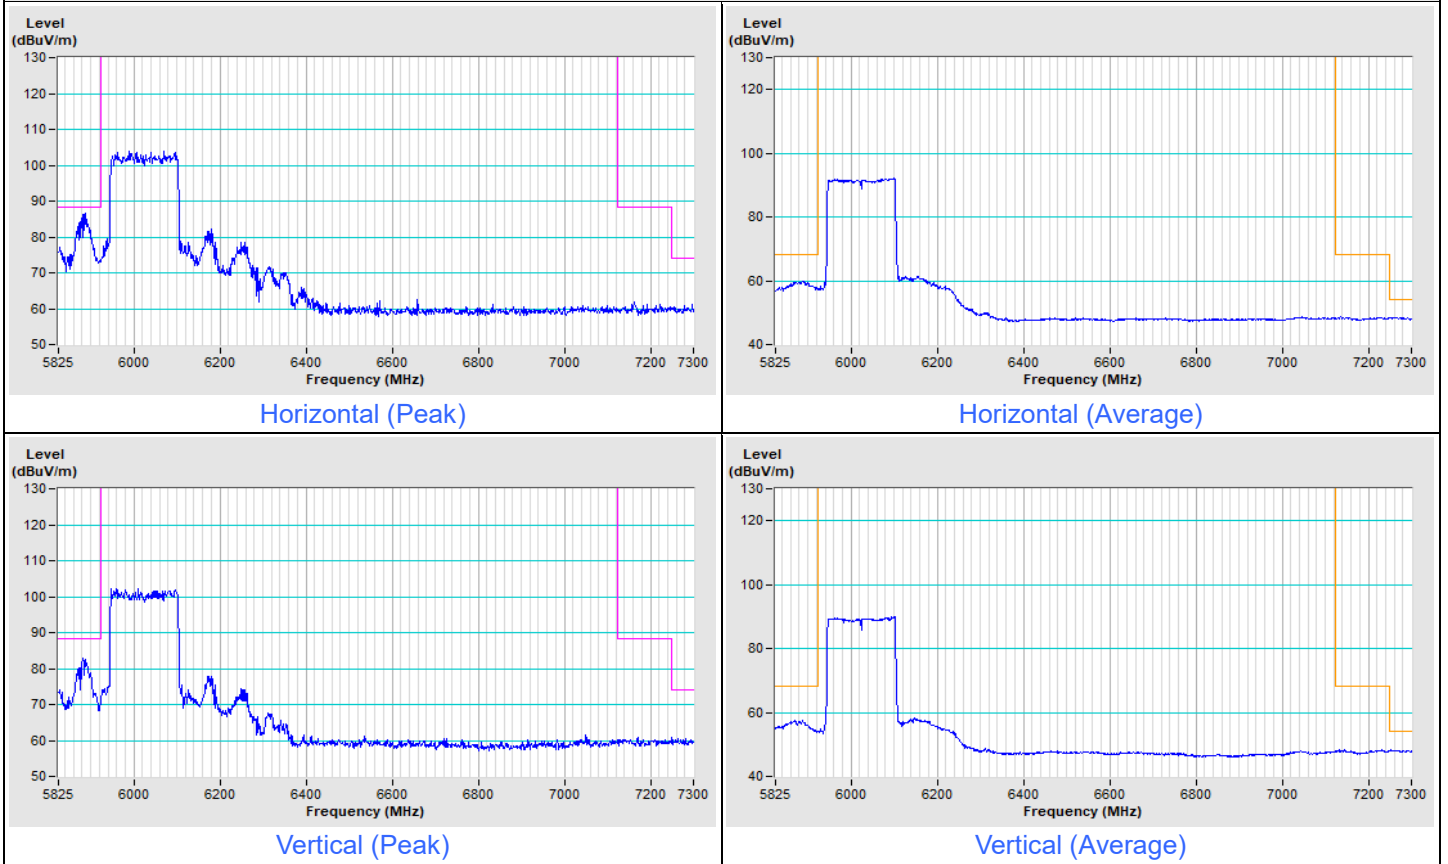

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

**802.11be (EHT160) Channel 207**

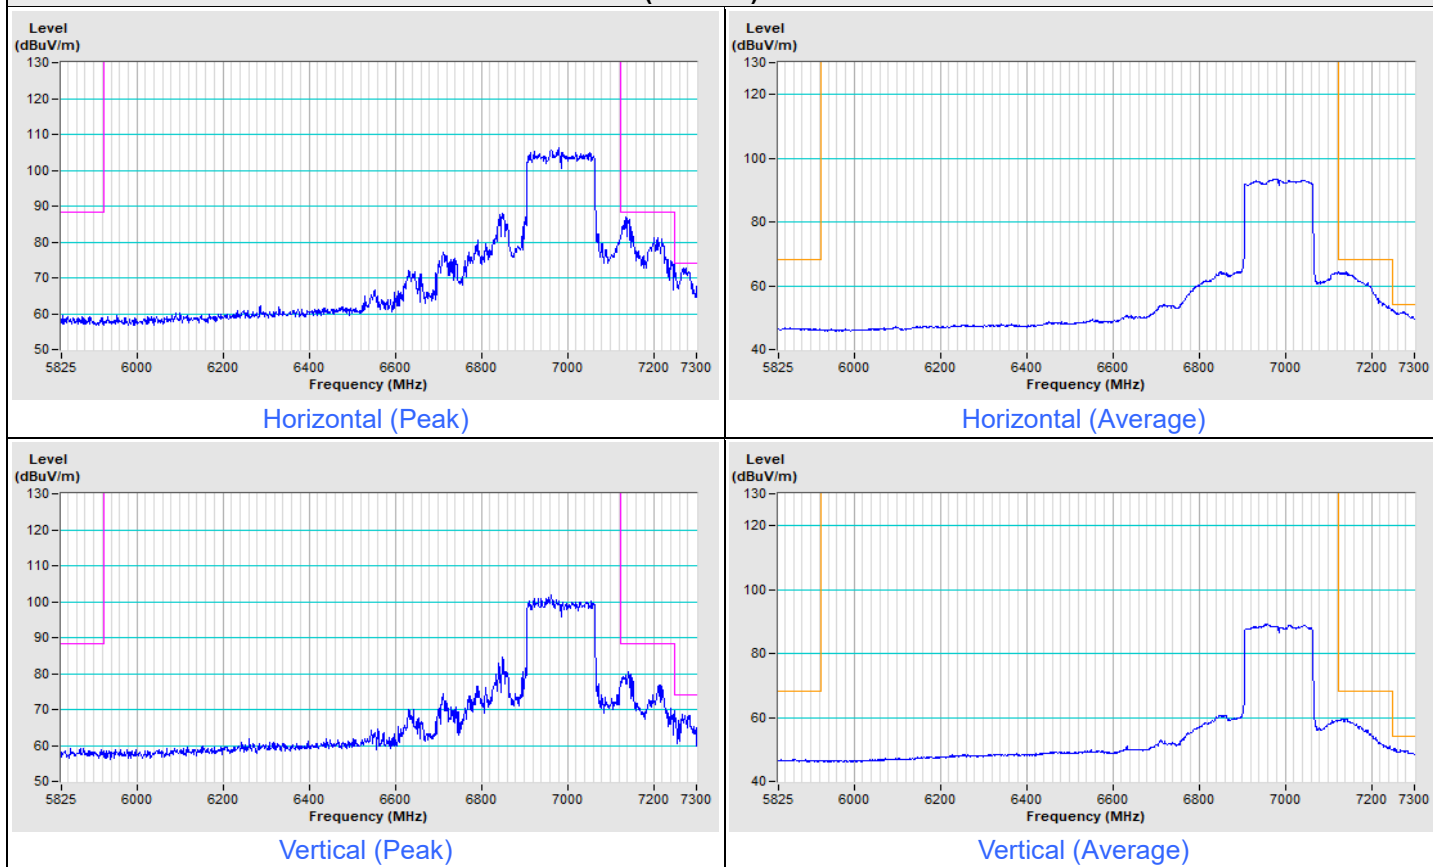




# Plot of Band Edge

2TX


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

## 802.11a Channel 1

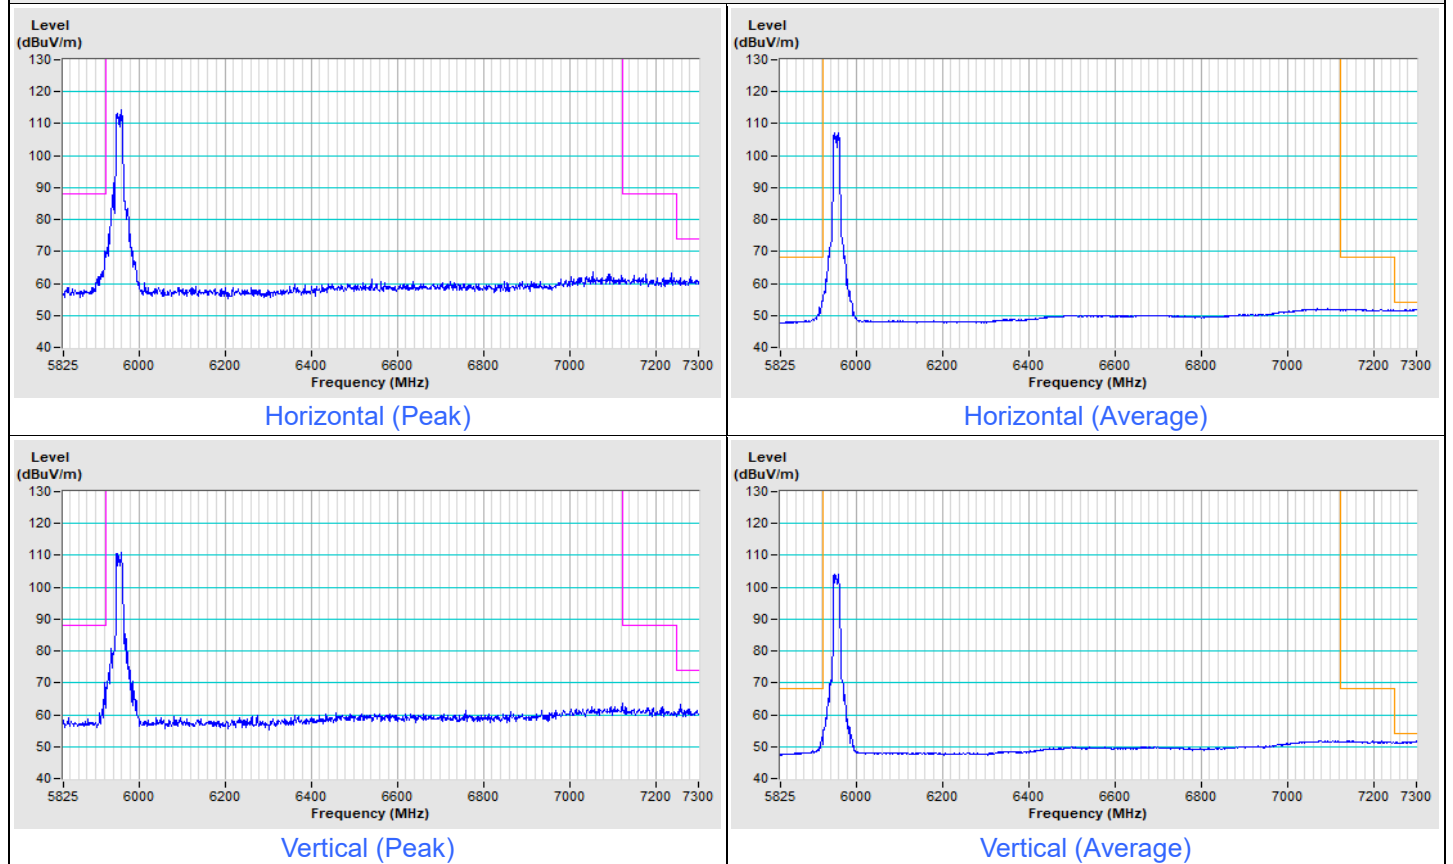


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


**802.11a Channel 233**

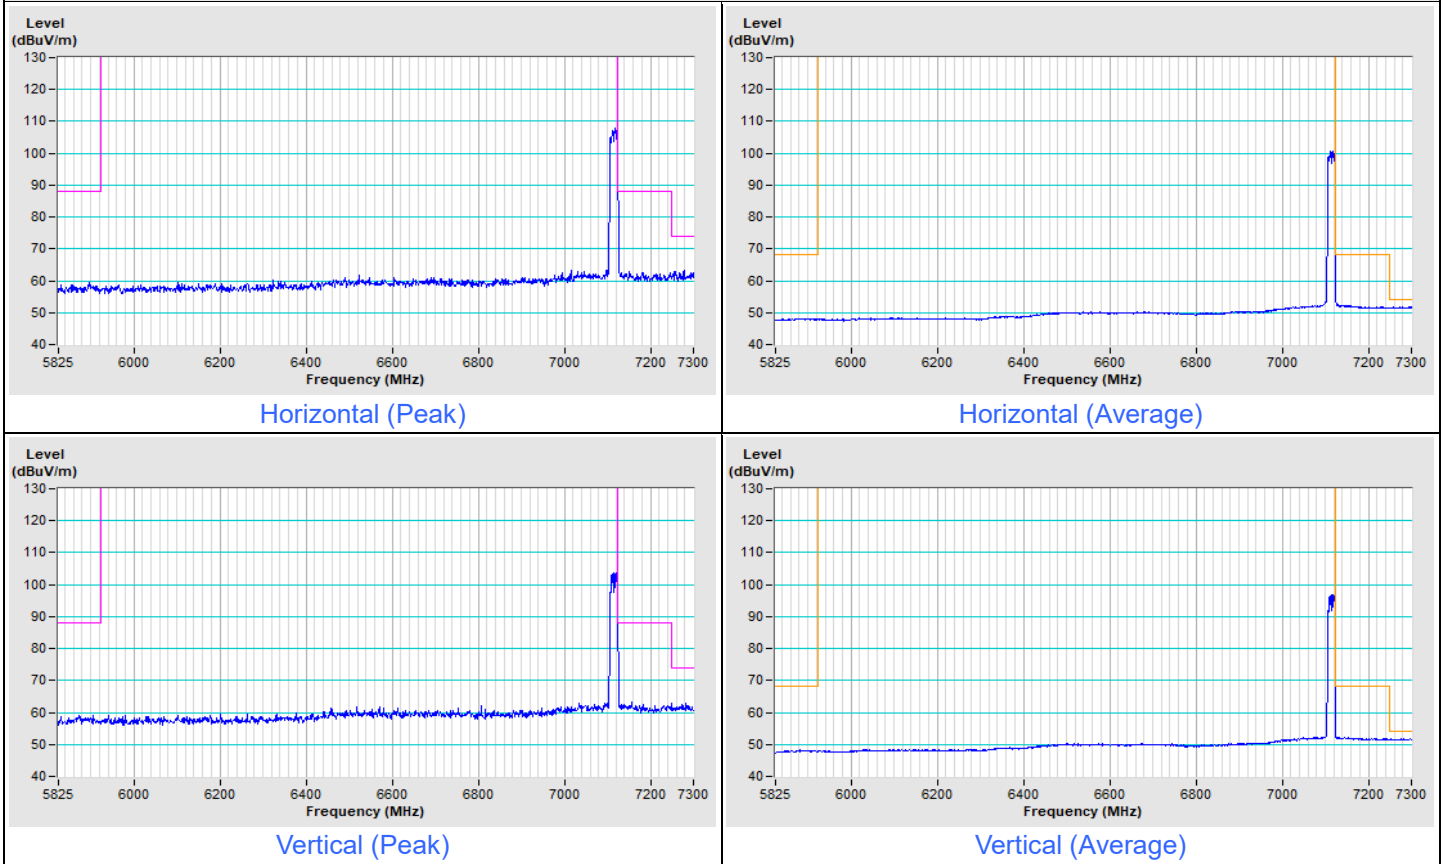


### 802.11be (EHT20) Channel 1

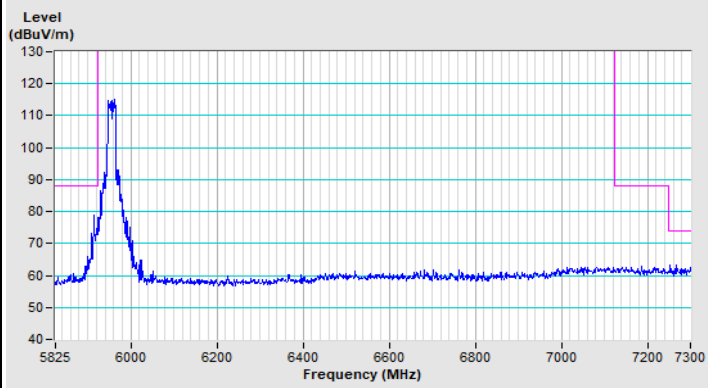


Horizontal (Peak)

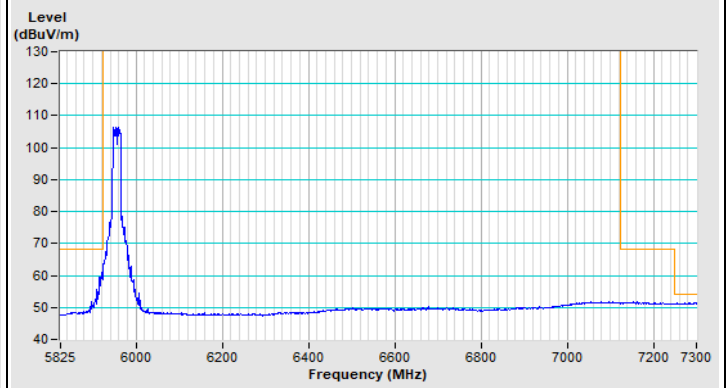

Horizontal (Average)

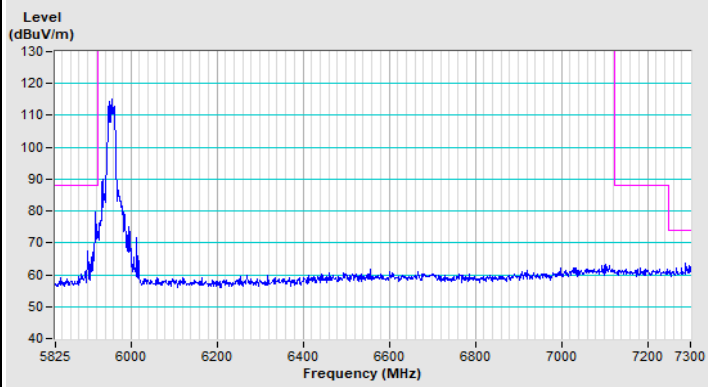


Vertical (Peak)

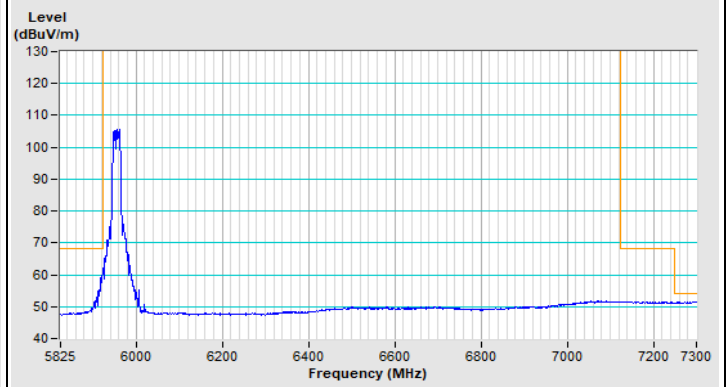

Vertical (Average)




### 802.11be (EHT20) Channel 233

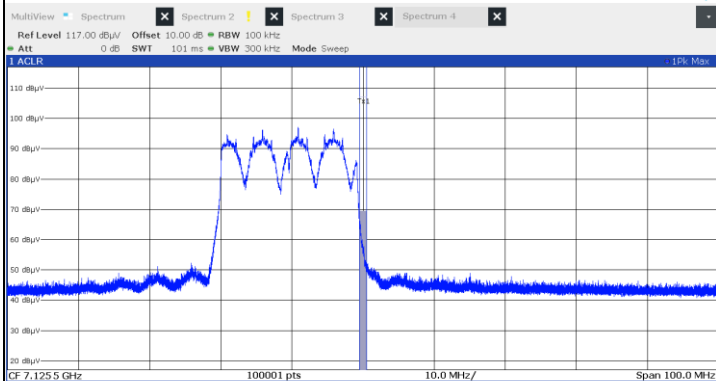

Channel	Bandwidth	Offset	Power
Tx1 (Ref)	1,000 MHz	None	69.40 dBµV
Tx Total			69.40 dBµV

17:18:38 24.08.2023


Horizontal (Peak)

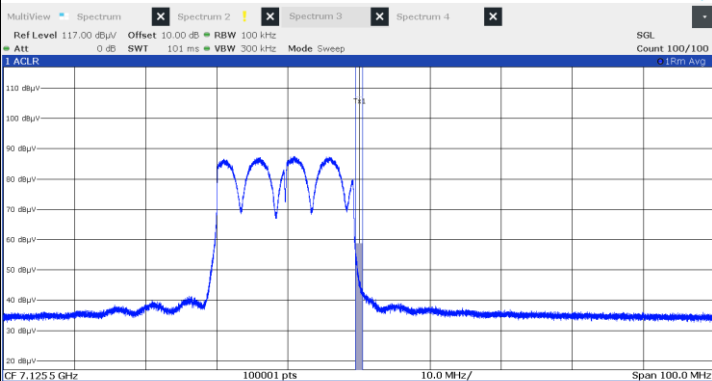

Channel	Bandwidth	Offset	Power
Tx1 (Ref)	1,000 MHz	None	58.68 dBµV
Tx Total			58.68 dBµV

17:16:16 24.08.2023


Horizontal (Average)

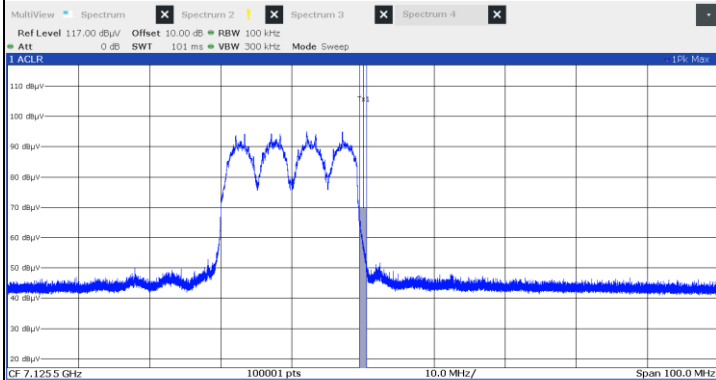

Channel	Bandwidth	Offset	Power
Tx1 (Ref)	1,000 MHz	None	69.63 dBµV
Tx Total			69.63 dBµV

18:09:54 24.08.2023

Vertical (Peak)

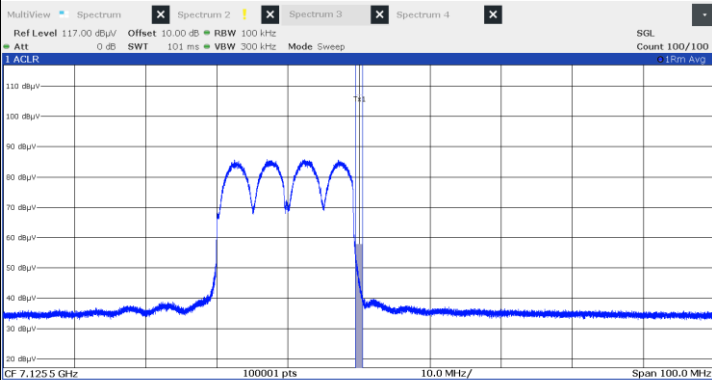


Channel	Bandwidth	Offset	Power
Tx1 (Ref)	1,000 MHz	None	57.73 dBµV
Tx Total			57.73 dBµV

18:06:40 24.08.2023

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

**802.11be (EHT40) Channel 3**

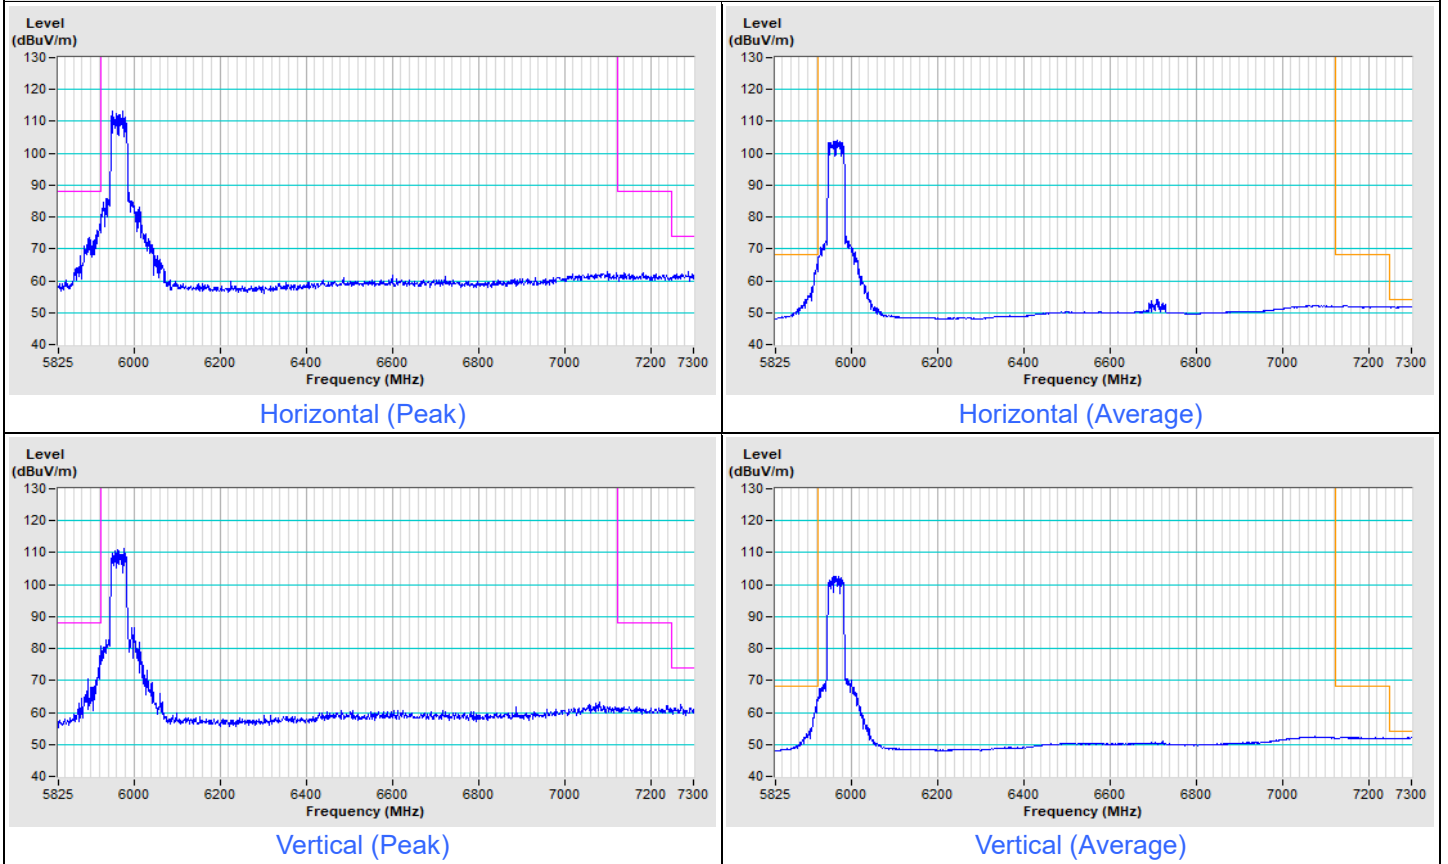


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

**802.11be (EHT40) Channel 227**

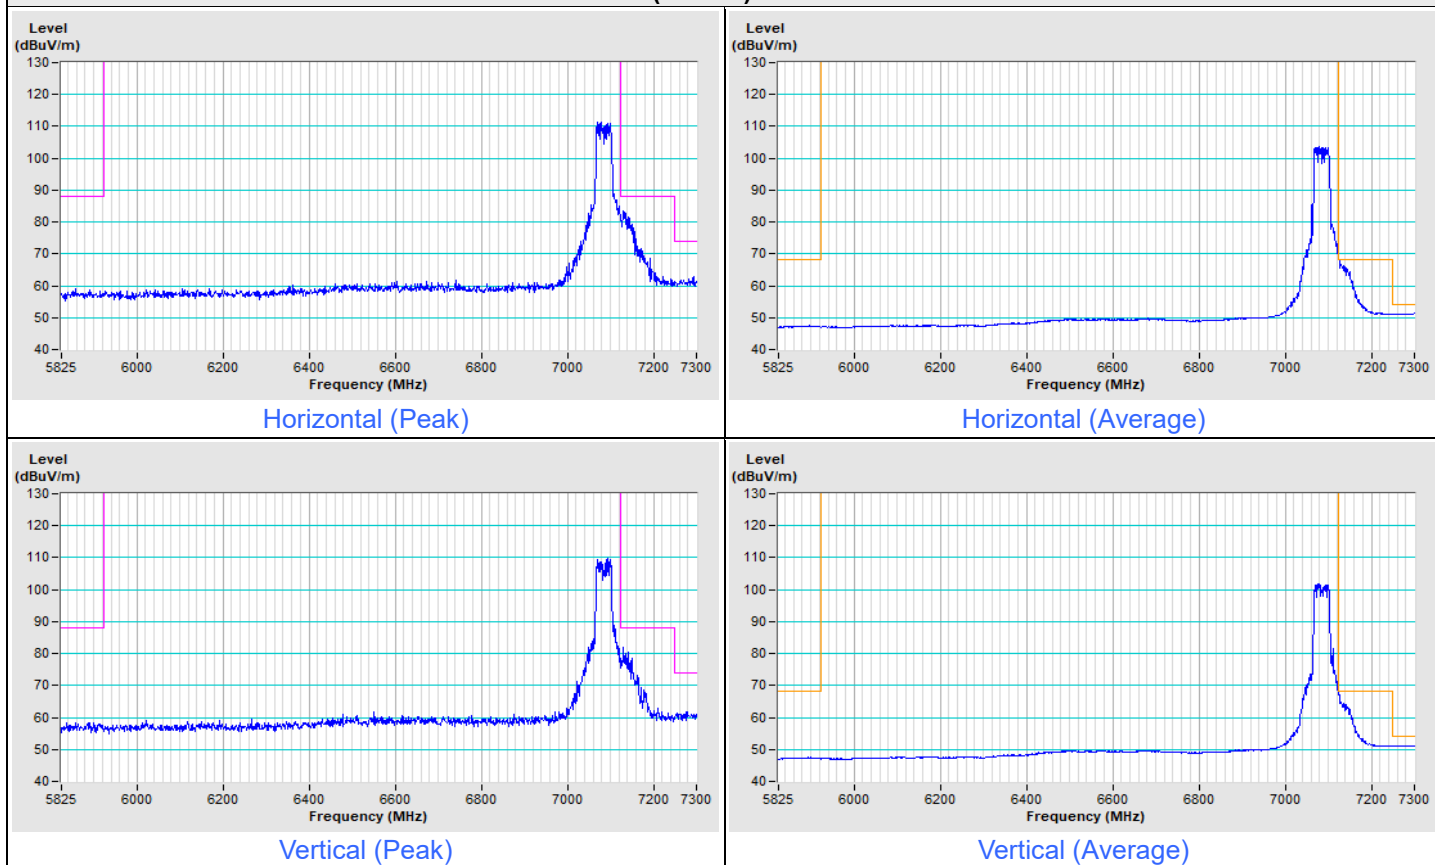


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

**802.11be (EHT80) Channel 7**

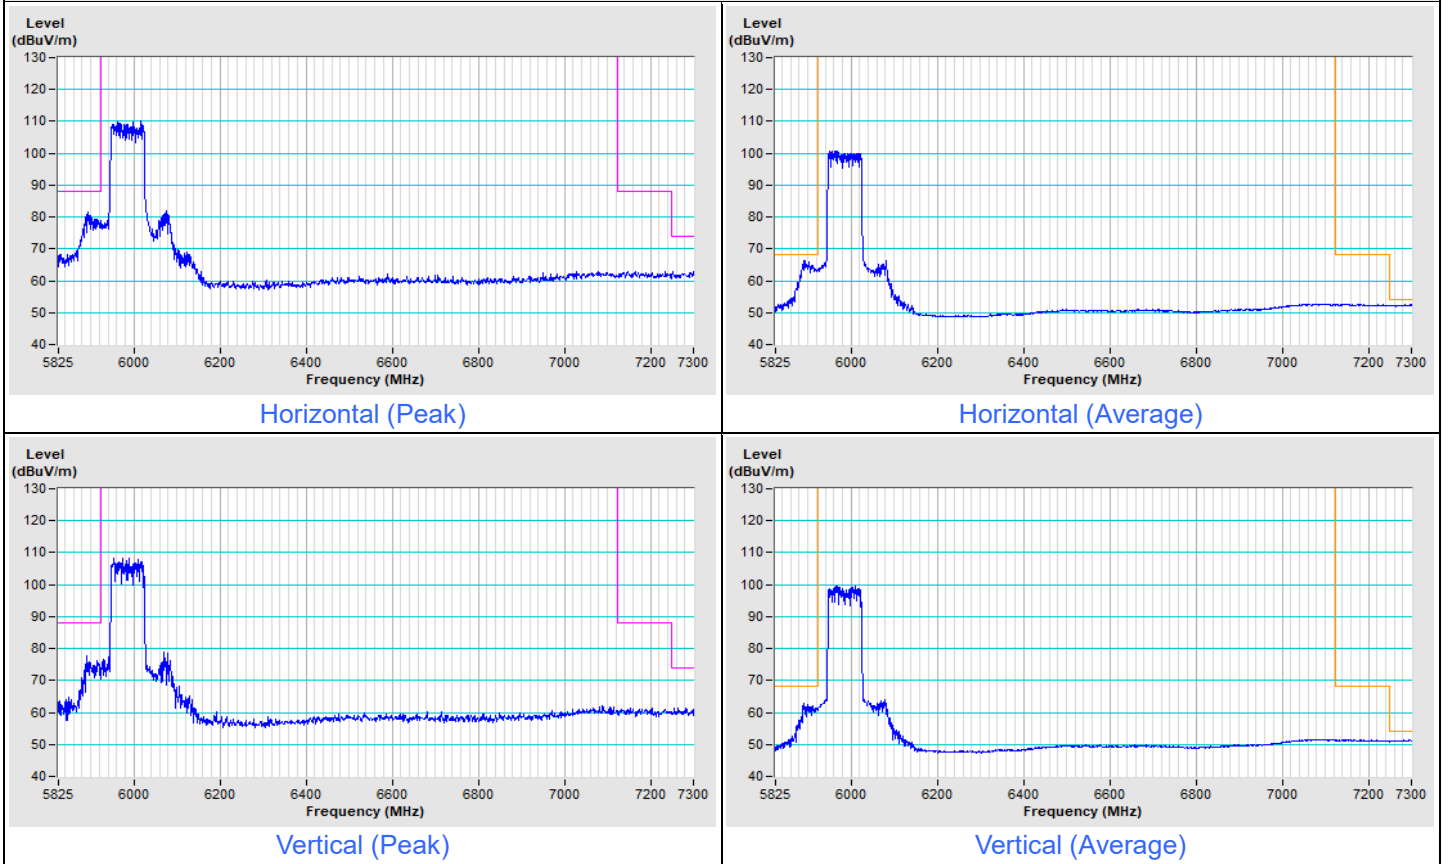

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


**802.11be (EHT80) Channel 215**

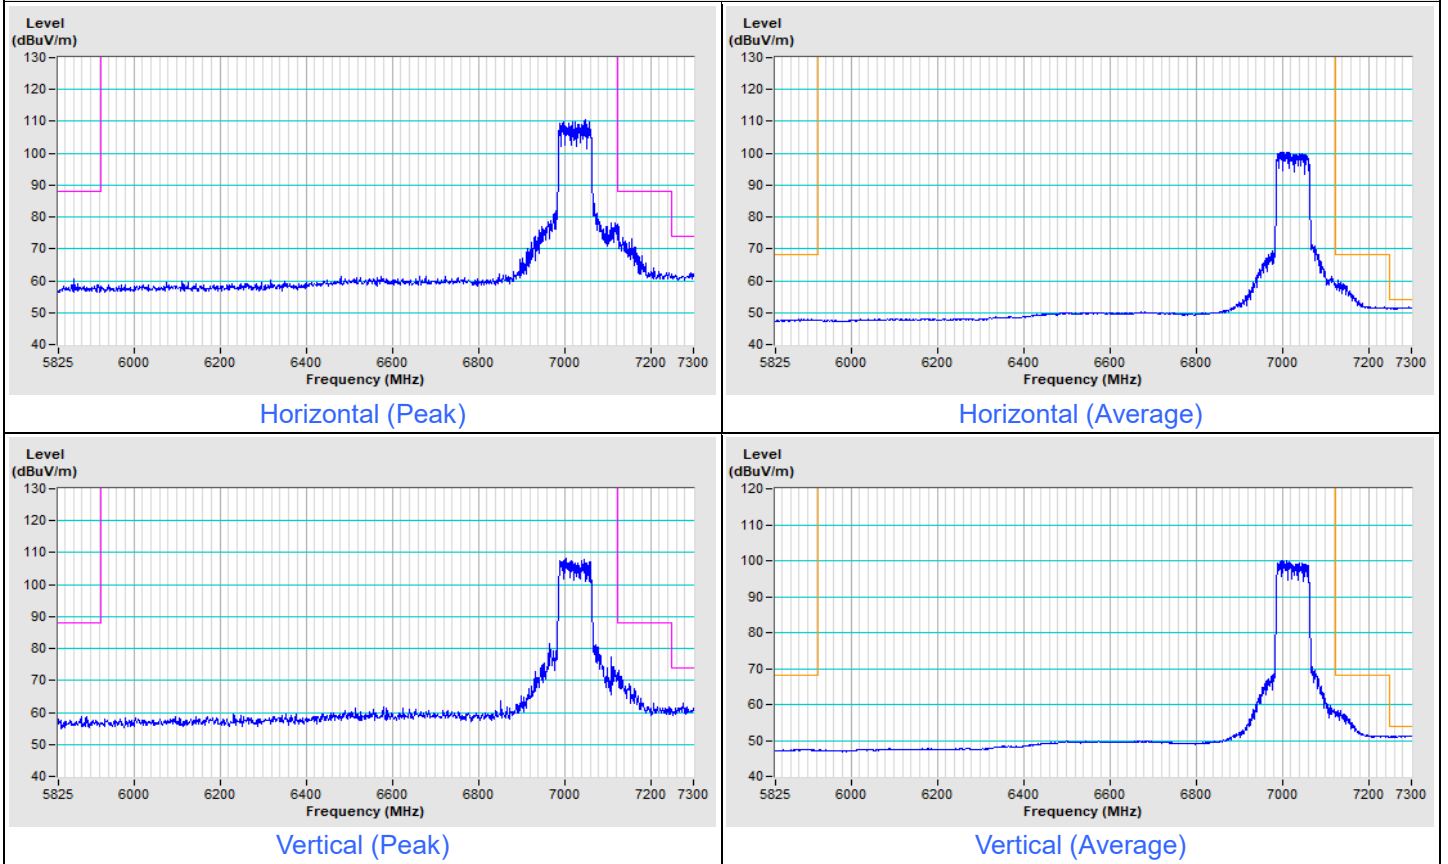




Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

### 802.11be (EHT160) Channel 15

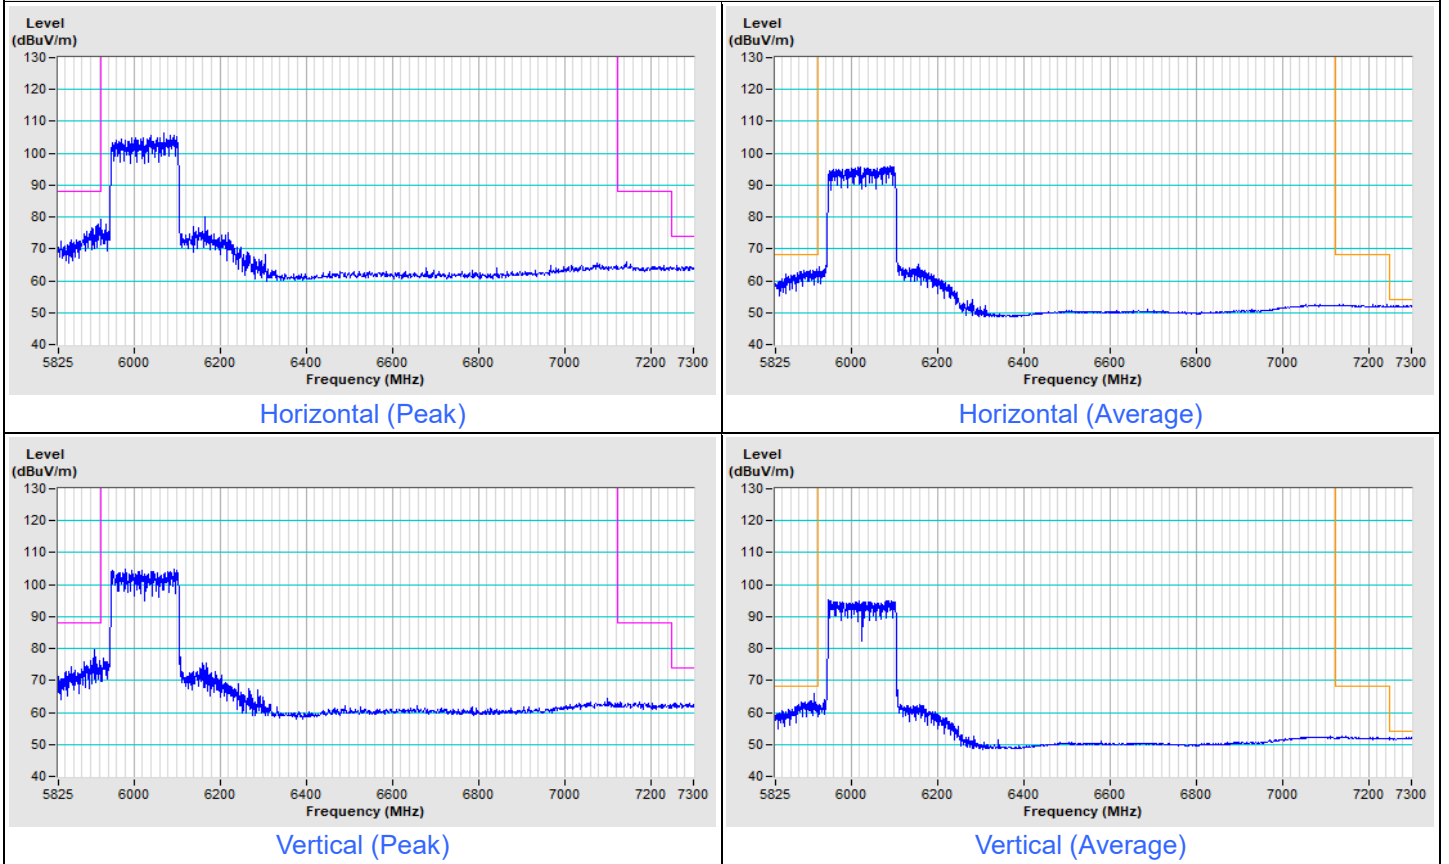

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

**802.11be (EHT160) Channel 207**

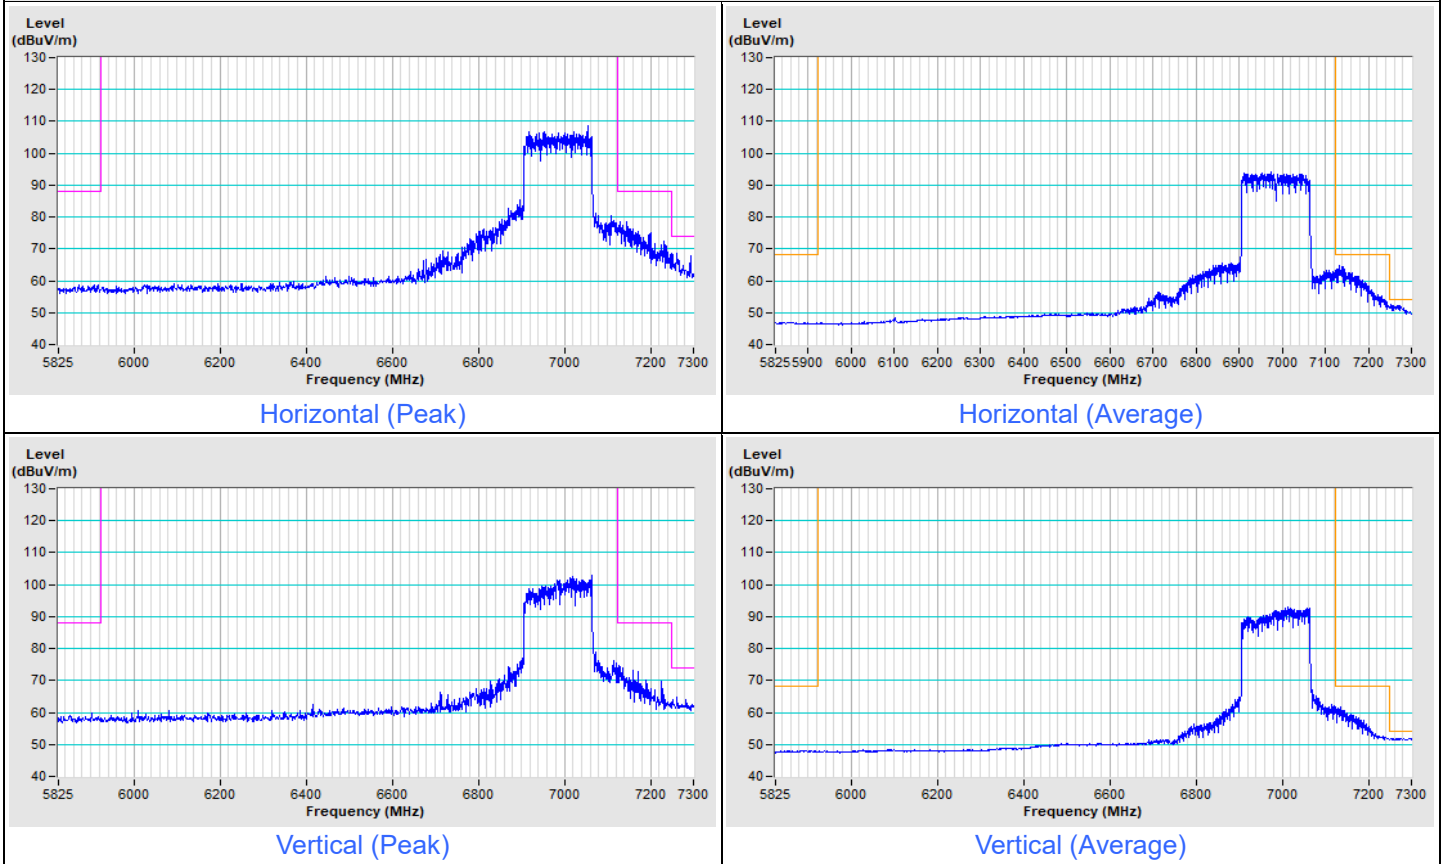

**Plot of Band Edge**  
**Partial RU\_1TX**

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

