




802.11be (EHT20) 26-tone Channel 233

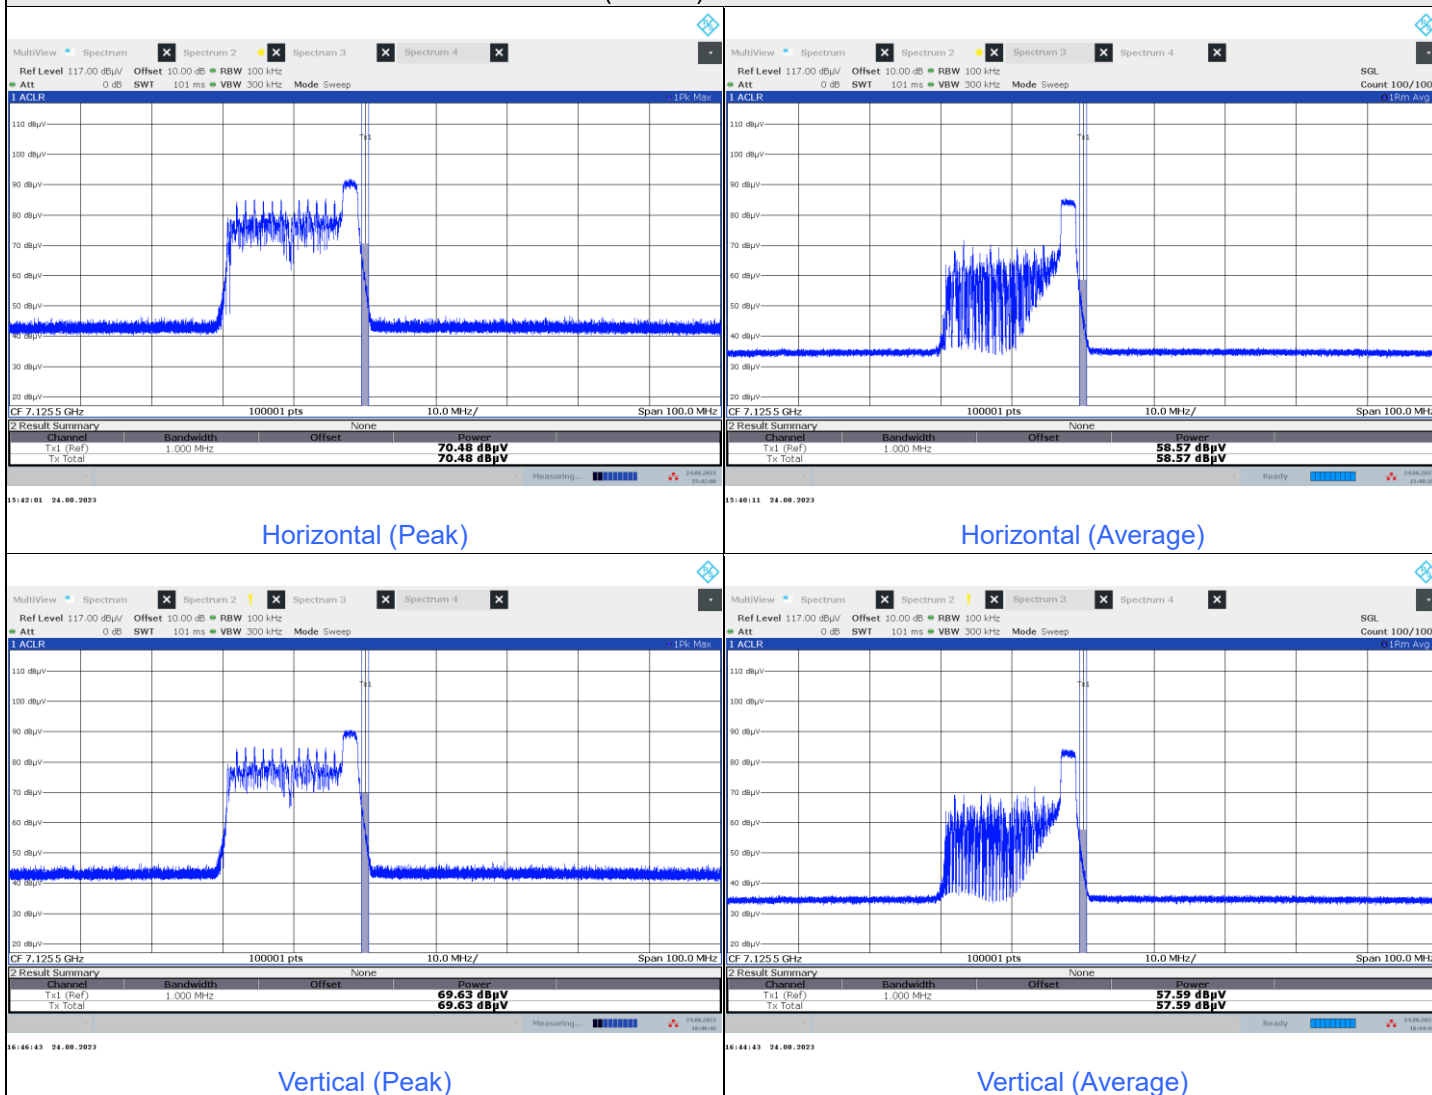


802.11be (EHT20) 52-tone RU Channel 1

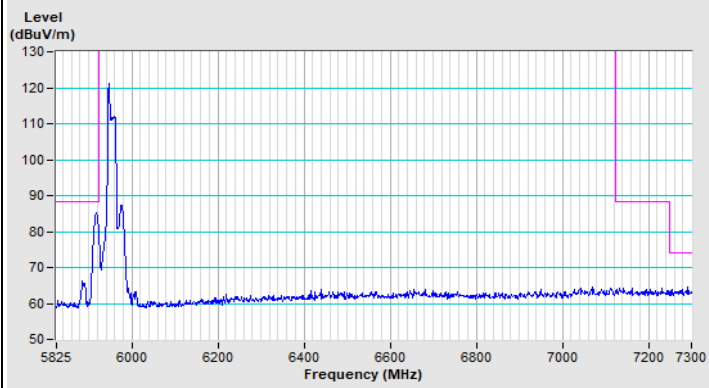


Horizontal (Peak)

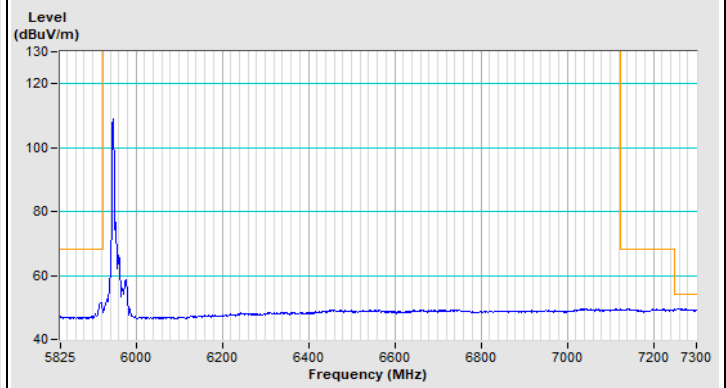

Horizontal (Average)

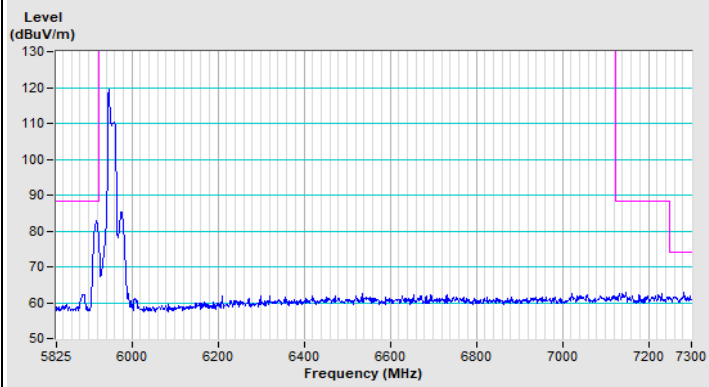


Vertical (Peak)

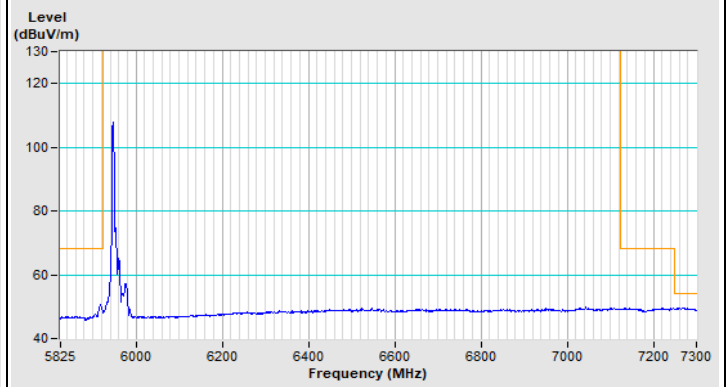


Vertical (Average)




802.11be (EHT20) 52-tone Channel 233

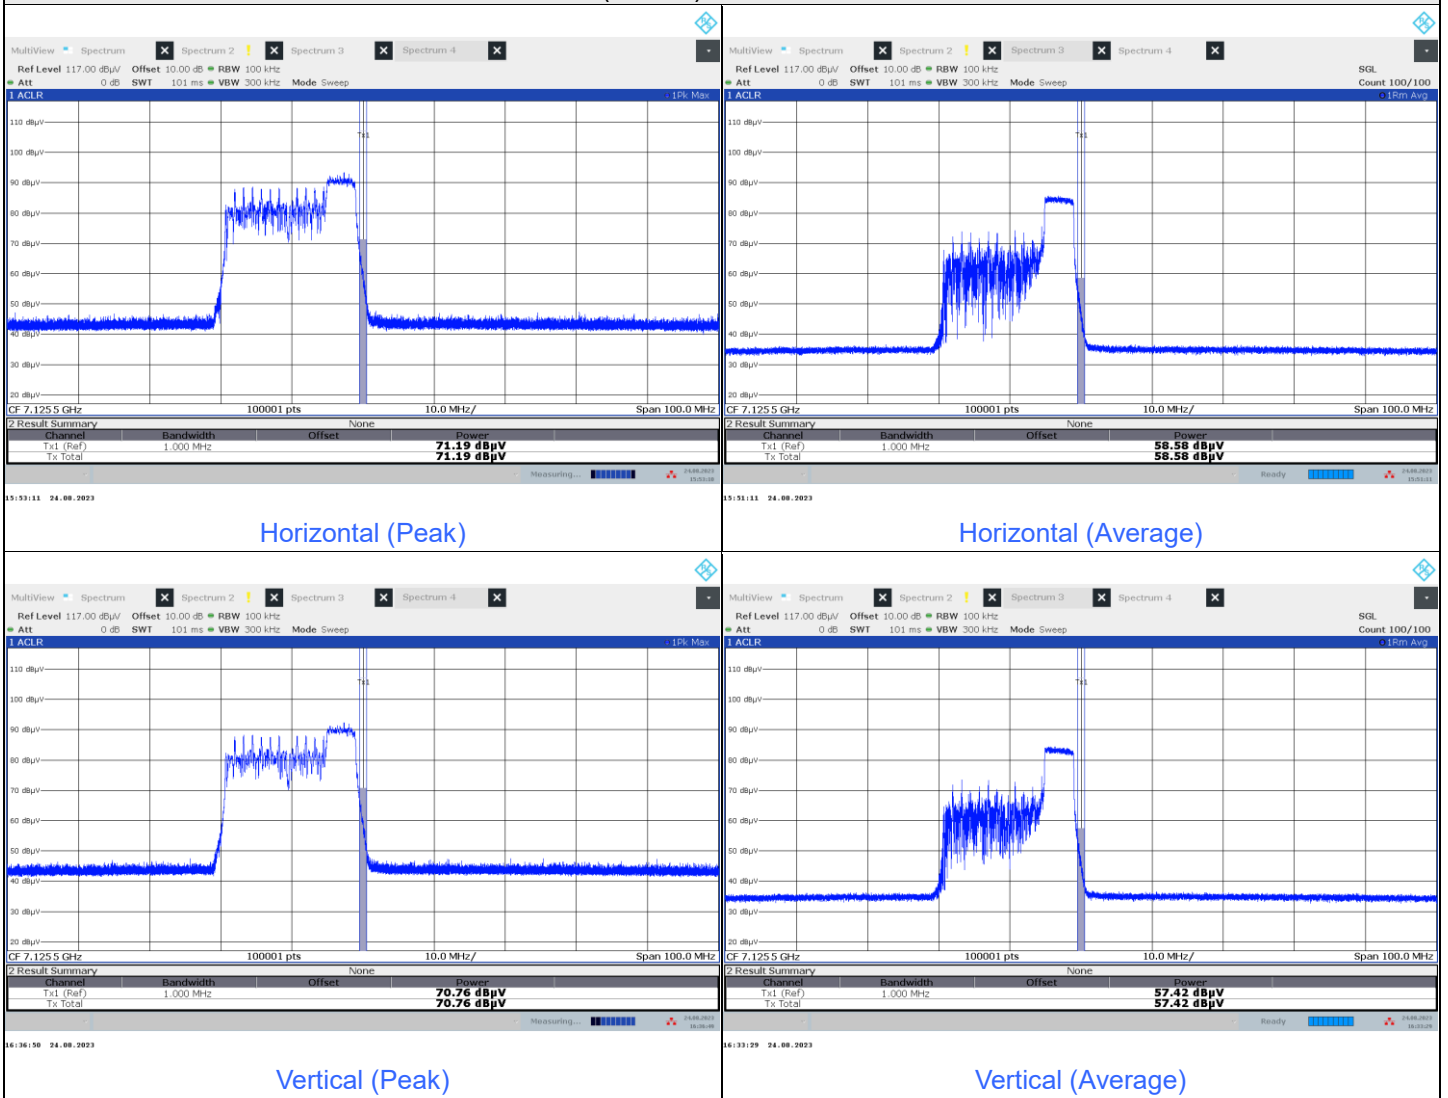


802.11be (EHT20) 106-tone RU Channel 1

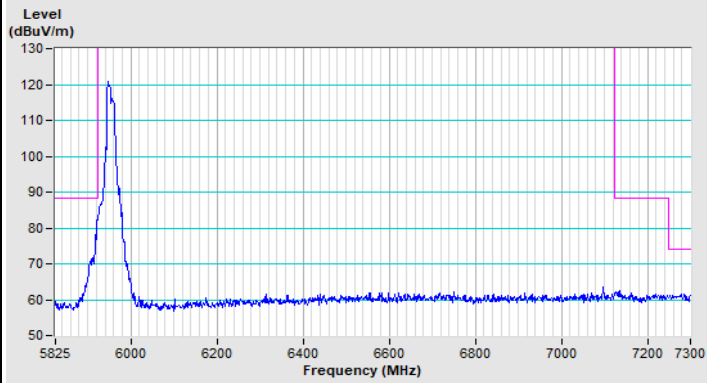


Horizontal (Peak)

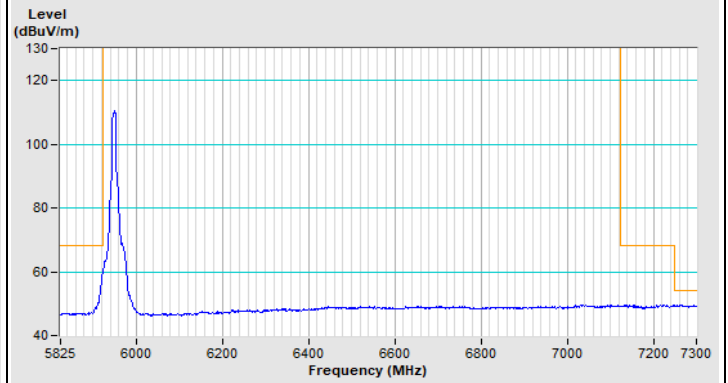

Horizontal (Average)

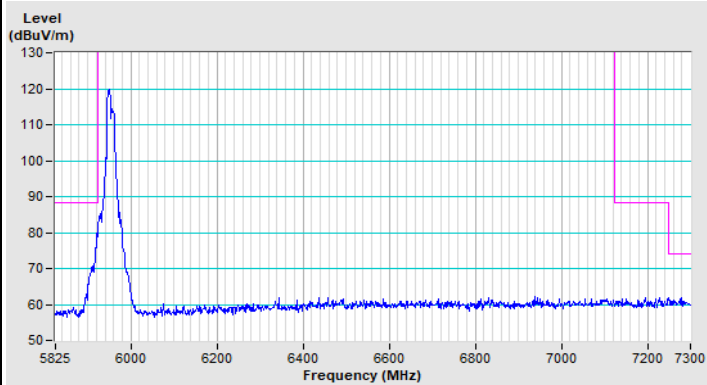


Vertical (Peak)

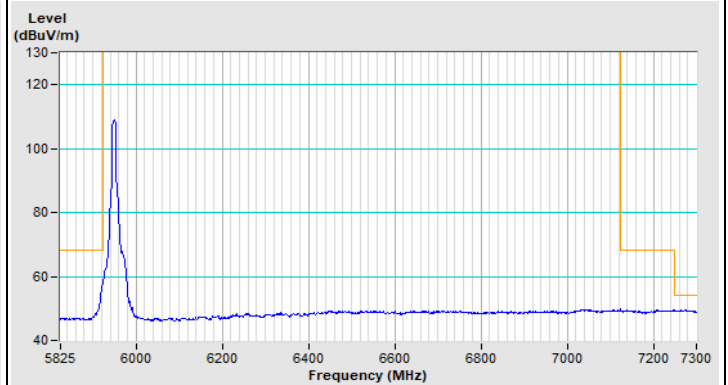


Vertical (Average)




802.11be (EHT20) 106-tone Channel 233

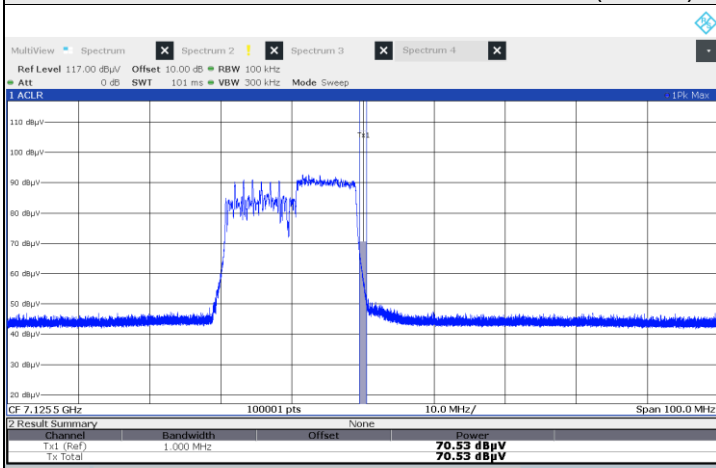


Horizontal (Peak)

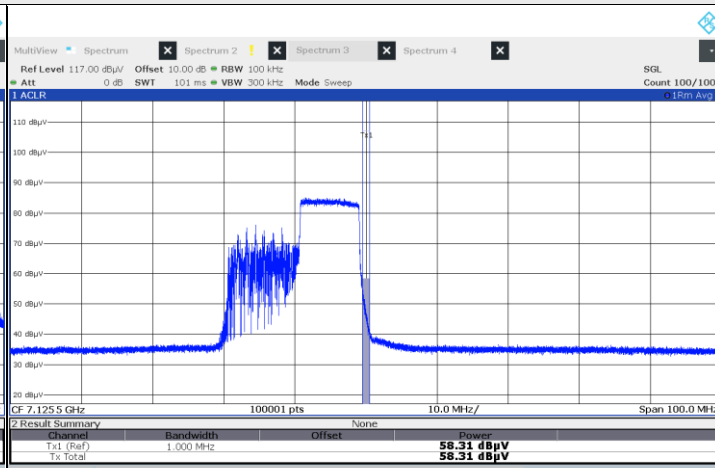

Horizontal (Average)

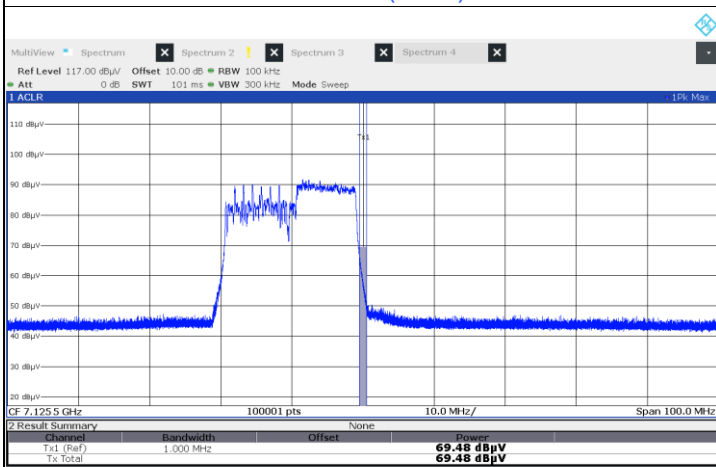


Vertical (Peak)

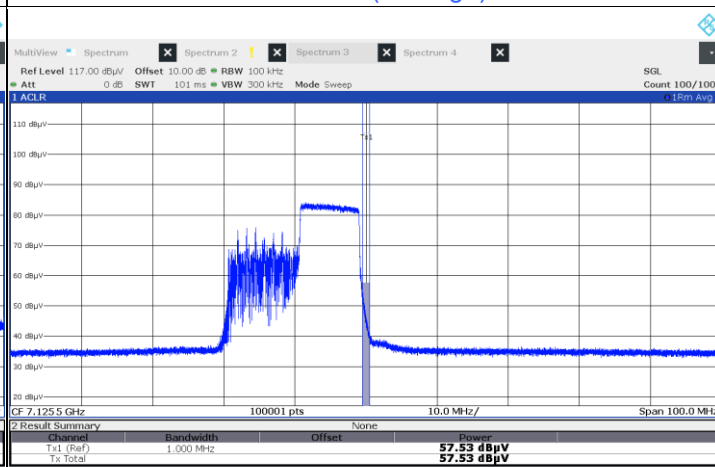

Vertical (Average)


Plot of Band Edge
Partial RU_2TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

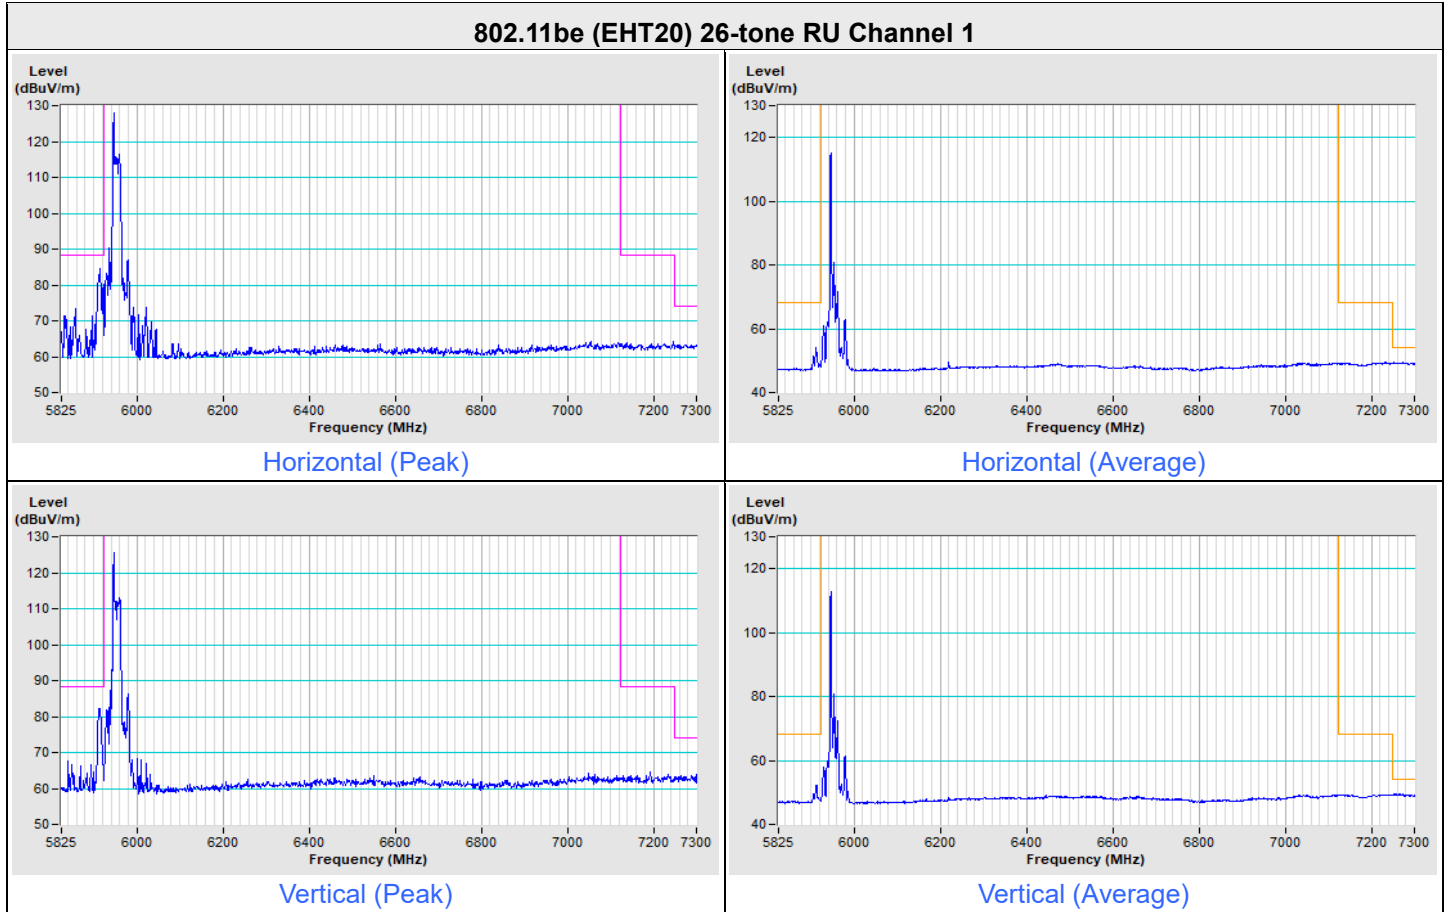





802.11be (EHT20) 26-tone Channel 233

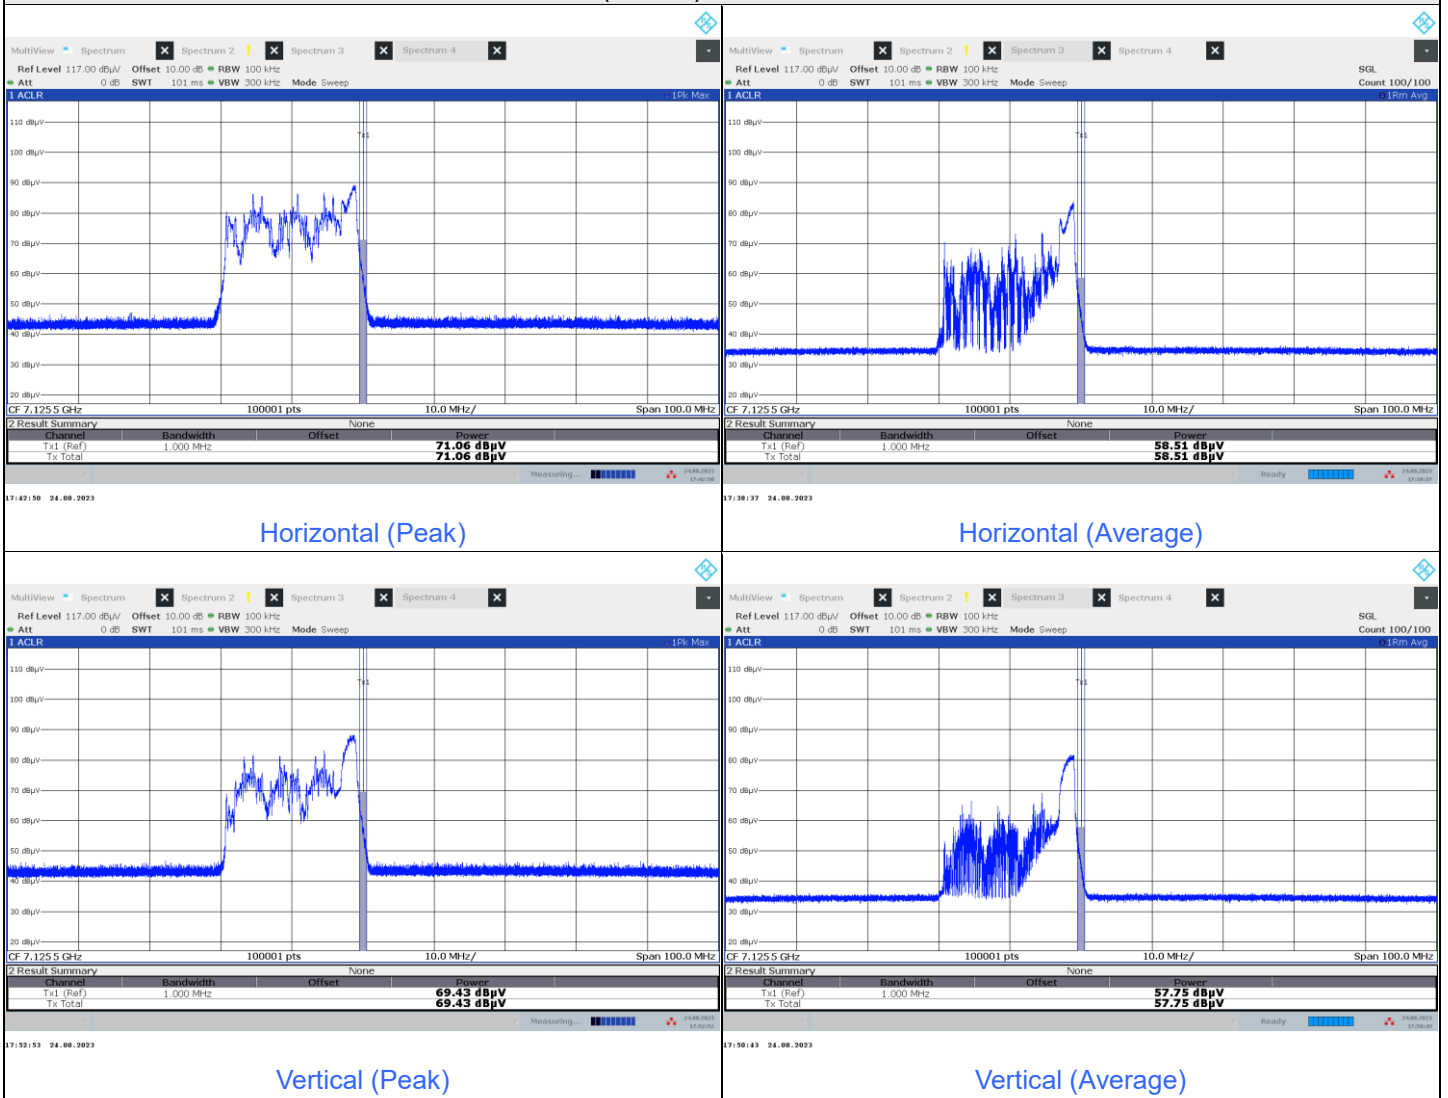


802.11be (EHT20) 52-tone RU Channel 1

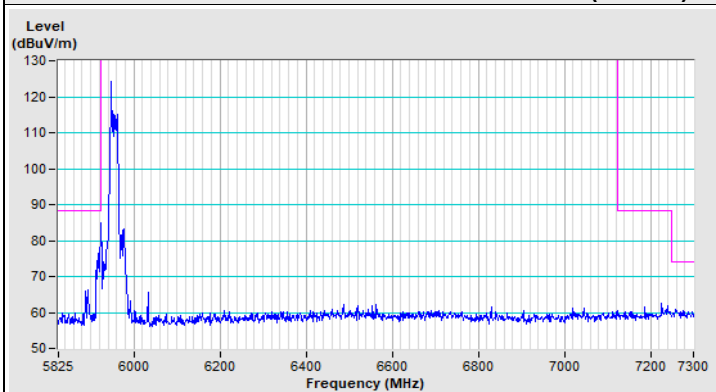


Horizontal (Peak)

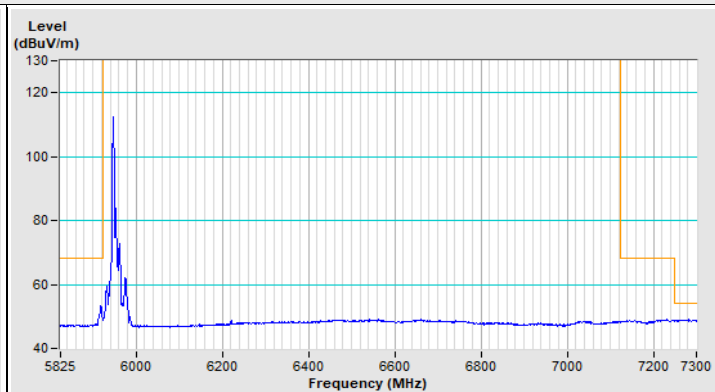

Horizontal (Average)

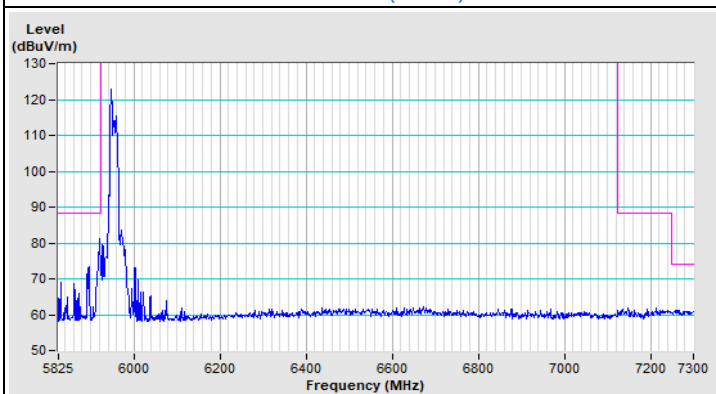


Vertical (Peak)

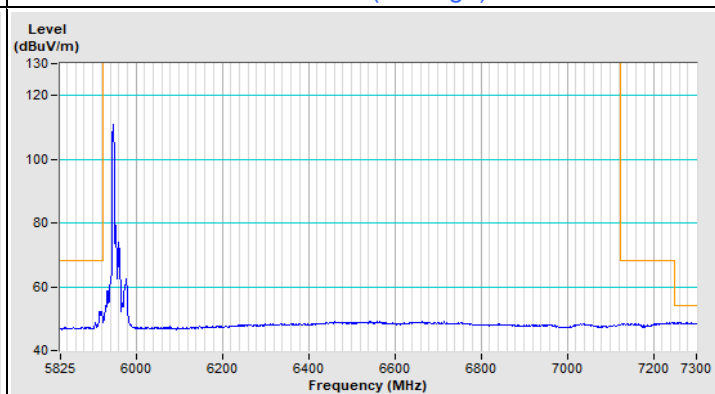





Vertical (Average)



802.11be (EHT20) 52-tone Channel 233

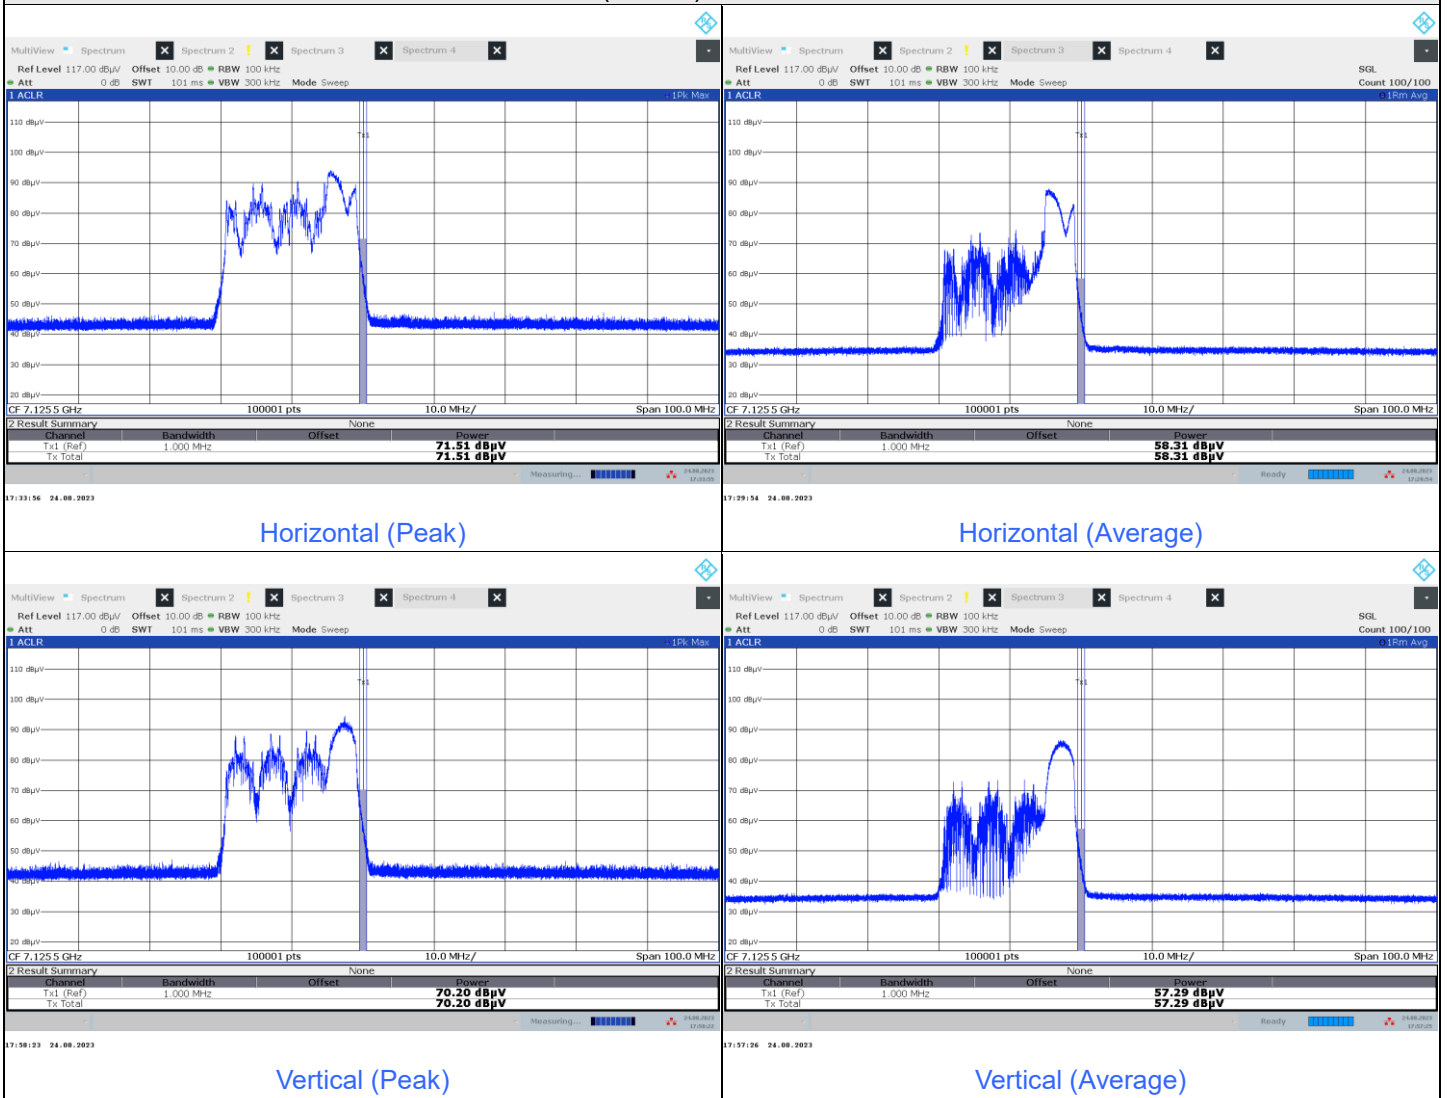


802.11be (EHT20) 106-tone RU Channel 1

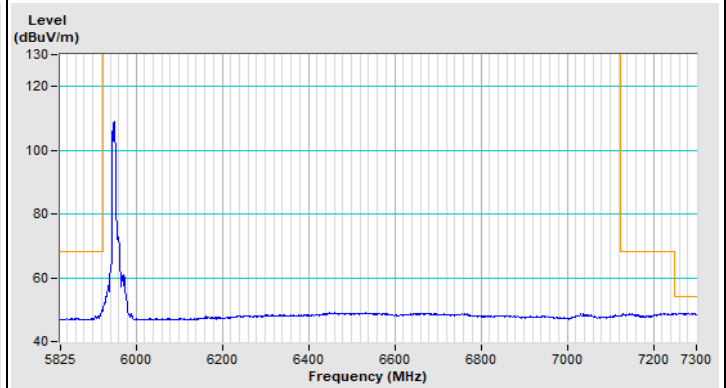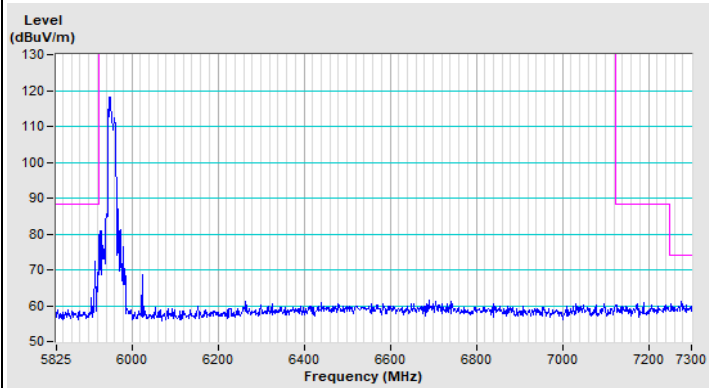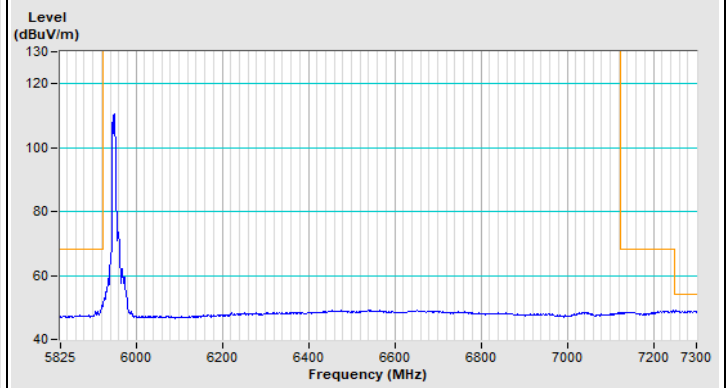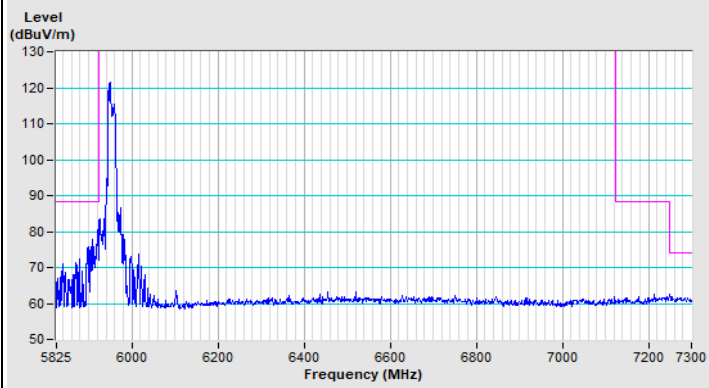





802.11be (EHT20) 106-tone Channel 233

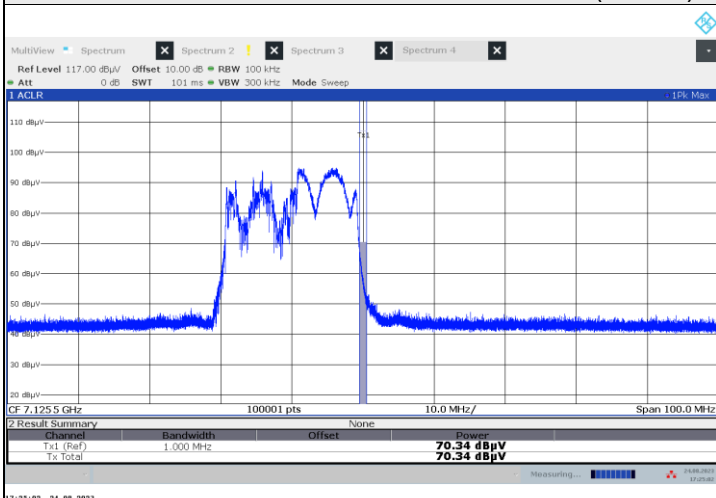


Horizontal (Peak)

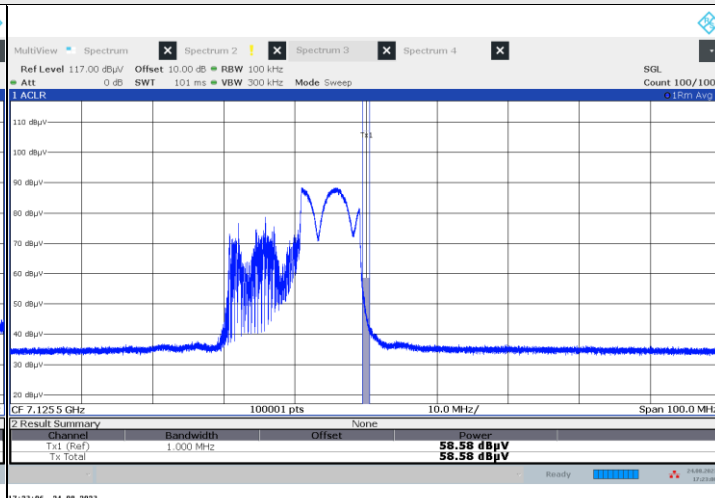

Horizontal (Average)

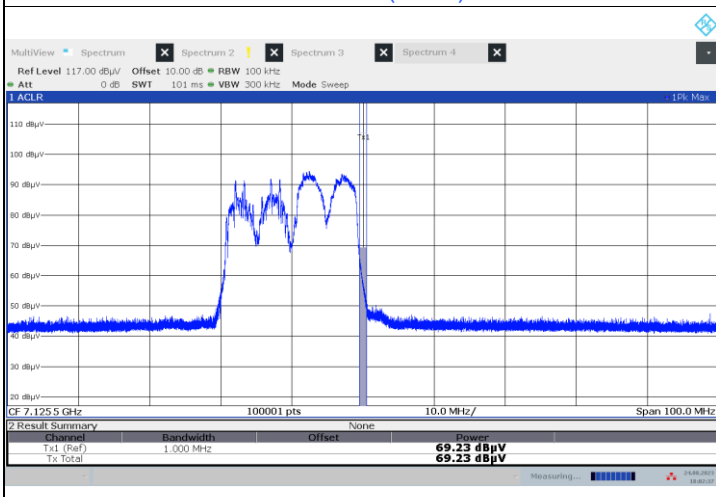

Vertical (Peak)

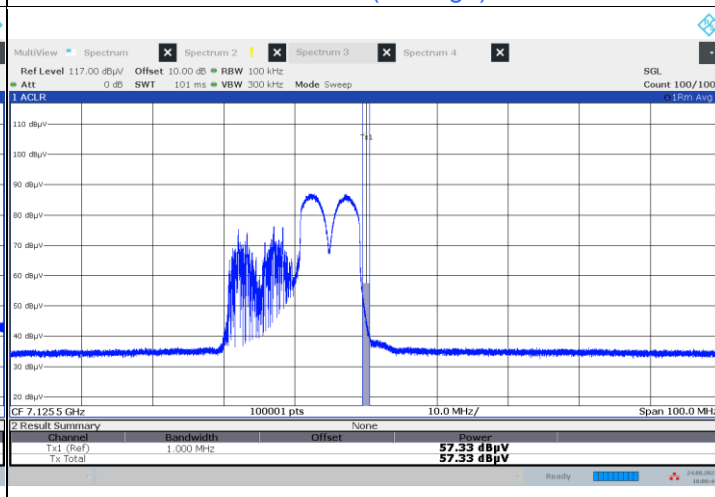

Vertical (Average)

under control of standard power AP

1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.0 PK	88.2	-18.2	1.00 H	1	65.0	5.0
2	#5925.00	56.3 AV	68.2	-11.9	1.00 H	1	51.3	5.0
3	*5955.00	115.9 PK			1.00 H	1	73.3	42.6
4	*5955.00	106.8 AV			1.00 H	1	64.2	42.6
5	11910.00	55.7 PK	74.0	-18.3	2.75 H	322	47.2	8.5
6	11910.00	48.0 AV	54.0	-6.0	2.75 H	322	39.5	8.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.5 PK	88.2	-15.7	2.17 V	283	67.5	5.0
2	#5925.00	57.0 AV	68.2	-11.2	2.17 V	283	52.0	5.0
3	*5955.00	114.4 PK			2.17 V	283	71.8	42.6
4	*5955.00	105.4 AV			2.17 V	283	62.8	42.6
5	11910.00	54.0 PK	74.0	-20.0	1.65 V	202	45.5	8.5
6	11910.00	47.0 AV	54.0	-7.0	1.65 V	202	38.5	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.9 PK			1.08 H	1	73.3	43.6
2	*6195.00	107.5 AV			1.08 H	1	63.9	43.6
3	12390.00	56.4 PK	74.0	-17.6	2.75 H	321	47.3	9.1
4	12390.00	48.5 AV	54.0	-5.5	2.75 H	321	39.4	9.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.9 PK			2.11 V	288	72.3	43.6
2	*6195.00	106.3 AV			2.11 V	288	62.7	43.6
3	12390.00	54.8 PK	74.0	-19.2	1.69 V	206	45.7	9.1
4	12390.00	47.7 AV	54.0	-6.3	1.69 V	206	38.6	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.1 PK			1.15 H	2	73.2	44.9
2	*6415.00	117.6 AV			1.15 H	2	72.7	44.9
3	#12830.00	56.7 PK	88.2	-31.5	2.78 H	325	47.0	9.7
4	#12830.00	48.9 AV	68.2	-19.3	2.78 H	325	39.2	9.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.4 PK			2.09 V	286	70.5	44.9
2	*6415.00	105.7 AV			2.09 V	286	60.8	44.9
3	#12830.00	55.3 PK	88.2	-32.9	1.77 V	205	45.6	9.7
4	#12830.00	48.1 AV	68.2	-20.1	1.77 V	205	38.4	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.6 PK			1.05 H	2	72.3	45.3
2	*6535.00	107.7 AV			1.05 H	2	62.4	45.3
3	#13070.00	56.7 PK	88.2	-31.5	2.75 H	325	47.3	9.4
4	#13070.00	48.8 AV	68.2	-19.4	2.75 H	325	39.4	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.5 PK			2.04 V	284	70.2	45.3
2	*6535.00	106.1 AV			2.04 V	284	60.8	45.3
3	#13070.00	55.1 PK	88.2	-33.1	1.69 V	205	45.7	9.4
4	#13070.00	48.0 AV	68.2	-20.2	1.69 V	205	38.6	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.8 PK			1.01 H	1	71.4	45.4
2	*6695.00	107.2 AV			1.01 H	1	61.8	45.4
3	13390.00	57.4 PK	74.0	-16.6	2.72 H	319	47.3	10.1
4	13390.00	49.7 AV	54.0	-4.3	2.72 H	319	39.6	10.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.0 PK			2.01 V	284	70.6	45.4
2	*6695.00	105.9 AV			2.01 V	284	60.5	45.4
3	13390.00	55.6 PK	74.0	-18.4	1.62 V	201	45.5	10.1
4	13390.00	48.5 AV	54.0	-5.5	1.62 V	201	38.4	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.5 PK			1.02 H	0	71.0	45.5
2	*6855.00	107.4 AV			1.02 H	0	61.9	45.5
3	#13710.00	56.4 PK	88.2	-31.8	2.72 H	326	47.0	9.4
4	#13710.00	48.7 AV	68.2	-19.5	2.72 H	326	39.3	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.0 PK			1.98 V	285	70.5	45.5
2	*6855.00	106.1 AV			1.98 V	285	60.6	45.5
3	#13710.00	55.0 PK	88.2	-33.2	1.66 V	206	45.6	9.4
4	#13710.00	47.9 AV	68.2	-20.3	1.66 V	206	38.5	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	86.7 PK	88.2	-1.5	1.00 H	1	81.7	5.0
2	#5925.00	53.2 AV	68.2	-15.0	1.00 H	1	48.2	5.0
3	*5955.00	112.6 PK			1.01 H	1	70.0	42.6
4	*5955.00	100.9 AV			1.01 H	1	58.3	42.6
5	11910.00	55.8 PK	74.0	-18.2	2.79 H	329	47.3	8.5
6	11910.00	48.1 AV	54.0	-5.9	2.79 H	329	39.6	8.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	85.3 PK	88.2	-2.9	2.11 V	287	80.3	5.0
2	#5925.00	53.0 AV	68.2	-15.2	2.11 V	287	48.0	5.0
3	*5955.00	111.1 PK			2.11 V	287	68.5	42.6
4	*5955.00	99.2 AV			2.11 V	287	56.6	42.6
5	11910.00	53.9 PK	74.0	-20.1	1.69 V	205	45.4	8.5
6	11910.00	47.1 AV	54.0	-6.9	1.69 V	205	38.6	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	117.8 PK			1.02 H	1	74.2	43.6
2	*6195.00	106.1 AV			1.02 H	1	62.5	43.6
3	12390.00	56.2 PK	74.0	-17.8	2.73 H	318	47.1	9.1
4	12390.00	48.5 AV	54.0	-5.5	2.73 H	318	39.4	9.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.6 PK			2.04 V	286	73.0	43.6
2	*6195.00	104.3 AV			2.04 V	286	60.7	43.6
3	12390.00	54.6 PK	74.0	-19.4	1.65 V	202	45.5	9.1
4	12390.00	47.6 AV	54.0	-6.4	1.65 V	202	38.5	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.4 PK			1.04 H	1	71.5	44.9
2	*6415.00	105.7 AV			1.04 H	1	60.8	44.9
3	#12830.00	56.7 PK	88.2	-31.5	2.76 H	324	47.0	9.7
4	#12830.00	49.0 AV	68.2	-19.2	2.76 H	324	39.3	9.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.1 PK			2.11 V	284	70.2	44.9
2	*6415.00	104.0 AV			2.11 V	284	59.1	44.9
3	#12830.00	55.3 PK	88.2	-32.9	1.75 V	203	45.6	9.7
4	#12830.00	48.3 AV	68.2	-19.9	1.75 V	203	38.6	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.7 PK			1.05 H	4	72.4	45.3
2	*6535.00	105.5 AV			1.05 H	4	60.2	45.3
3	#13070.00	56.4 PK	88.2	-31.8	2.75 H	325	47.0	9.4
4	#13070.00	48.6 AV	68.2	-19.6	2.75 H	325	39.2	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.1 PK			2.04 V	284	70.8	45.3
2	*6535.00	104.2 AV			2.04 V	284	58.9	45.3
3	#13070.00	54.9 PK	88.2	-33.3	1.68 V	202	45.5	9.4
4	#13070.00	48.0 AV	68.2	-20.2	1.68 V	202	38.6	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.2 PK			1.05 H	2	72.8	45.4
2	*6695.00	106.6 AV			1.05 H	2	61.2	45.4
3	13390.00	57.2 PK	74.0	-16.8	2.72 H	325	47.1	10.1
4	13390.00	49.4 AV	54.0	-4.6	2.72 H	325	39.3	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.7 PK			2.00 V	284	71.3	45.4
2	*6695.00	105.1 AV			2.00 V	284	59.7	45.4
3	13390.00	55.6 PK	74.0	-18.4	1.65 V	208	45.5	10.1
4	13390.00	48.4 AV	54.0	-5.6	1.65 V	208	38.3	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.7 PK			1.05 H	1	72.2	45.5
2	*6855.00	106.2 AV			1.05 H	1	60.7	45.5
3	#13710.00	56.4 PK	88.2	-31.8	2.72 H	319	47.0	9.4
4	#13710.00	48.7 AV	68.2	-19.5	2.72 H	319	39.3	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.7 PK			2.04 V	282	71.2	45.5
2	*6855.00	105.0 AV			2.04 V	282	59.5	45.5
3	#13710.00	55.1 PK	88.2	-33.1	1.65 V	202	45.7	9.4
4	#13710.00	47.9 AV	68.2	-20.3	1.65 V	202	38.5	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	86.5 PK	88.2	-1.7	1.06 H	1	81.5	5.0
2	#5925.00	64.7 AV	68.2	-3.5	1.06 H	1	59.7	5.0
3	*5965.00	108.5 PK			1.06 H	1	65.9	42.6
4	*5965.00	97.4 AV			1.06 H	1	54.8	42.6
5	11930.00	55.6 PK	74.0	-18.4	2.75 H	335	47.1	8.5
6	11930.00	47.5 AV	54.0	-6.5	2.75 H	335	39.0	8.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.5 PK	88.2	-3.7	2.11 V	288	79.5	5.0
2	#5925.00	61.0 AV	68.2	-7.2	2.11 V	288	56.0	5.0
3	*5965.00	107.3 PK			2.11 V	288	64.7	42.6
4	*5965.00	96.1 AV			2.11 V	288	53.5	42.6
5	11930.00	53.5 PK	74.0	-20.5	1.75 V	211	45.0	8.5
6	11930.00	46.7 AV	54.0	-7.3	1.75 V	211	38.2	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	116.0 PK			1.02 H	1	72.3	43.7
2	*6205.00	102.7 AV			1.02 H	1	59.0	43.7
3	12410.00	56.2 PK	74.0	-17.8	2.79 H	321	47.0	9.2
4	12410.00	48.4 AV	54.0	-5.6	2.79 H	321	39.2	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.3 PK			2.09 V	287	70.6	43.7
2	*6205.00	101.1 AV			2.09 V	287	57.4	43.7
3	12410.00	54.3 PK	74.0	-19.7	1.77 V	213	45.1	9.2
4	12410.00	47.5 AV	54.0	-6.5	1.77 V	213	38.3	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	116.0 PK			1.09 H	6	71.2	44.8
2	*6405.00	103.0 AV			1.09 H	6	58.2	44.8
3	#12810.00	56.8 PK	88.2	-31.4	2.78 H	325	47.0	9.8
4	#12810.00	48.8 AV	68.2	-19.4	2.78 H	325	39.0	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	113.2 PK			2.03 V	286	68.4	44.8
2	*6405.00	101.4 AV			2.03 V	286	56.6	44.8
3	#12810.00	54.9 PK	88.2	-33.3	1.77 V	221	45.1	9.8
4	#12810.00	48.0 AV	68.2	-20.2	1.77 V	221	38.2	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	116.4 PK			1.02 H	2	71.2	45.2
2	*6565.00	103.7 AV			1.02 H	2	58.5	45.2
3	#13130.00	56.7 PK	88.2	-31.5	2.75 H	321	47.1	9.6
4	#13130.00	48.8 AV	68.2	-19.4	2.75 H	321	39.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.7 PK			2.08 V	284	69.5	45.2
2	*6565.00	101.9 AV			2.08 V	284	56.7	45.2
3	#13130.00	54.8 PK	88.2	-33.4	1.82 V	208	45.2	9.6
4	#13130.00	47.6 AV	68.2	-20.6	1.82 V	208	38.0	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	116.4 PK			1.03 H	1	71.0	45.4
2	*6685.00	104.3 AV			1.03 H	1	58.9	45.4
3	13370.00	57.0 PK	74.0	-17.0	2.78 H	328	47.0	10.0
4	13370.00	49.1 AV	54.0	-4.9	2.78 H	328	39.1	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	113.9 PK			1.98 V	283	68.5	45.4
2	*6685.00	102.0 AV			1.98 V	283	56.6	45.4
3	13370.00	55.0 PK	74.0	-19.0	1.68 V	208	45.0	10.0
4	13370.00	48.1 AV	54.0	-5.9	1.68 V	208	38.1	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	116.5 PK			1.03 H	3	71.0	45.5
2	*6845.00	103.7 AV			1.03 H	3	58.2	45.5
3	#13690.00	56.4 PK	88.2	-31.8	2.75 H	319	47.0	9.4
4	#13690.00	48.3 AV	68.2	-19.9	2.75 H	319	38.9	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.5 PK			1.96 V	284	69.0	45.5
2	*6845.00	102.3 AV			1.96 V	284	56.8	45.5
3	#13690.00	54.6 PK	88.2	-33.6	1.72 V	215	45.2	9.4
4	#13690.00	47.7 AV	68.2	-20.5	1.72 V	215	38.3	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.6 PK	88.2	-3.6	1.03 H	3	79.6	5.0
2	#5925.00	66.6 AV	68.2	-1.6	1.03 H	3	61.6	5.0
3	*5985.00	108.0 PK			1.03 H	3	65.4	42.6
4	*5985.00	95.7 AV			1.03 H	3	53.1	42.6
5	11970.00	55.6 PK	74.0	-18.4	2.68 H	332	47.0	8.6
6	11970.00	47.4 AV	54.0	-6.6	2.68 H	332	38.8	8.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.3 PK	88.2	-3.9	1.98 V	299	79.3	5.0
2	#5925.00	66.4 AV	68.2	-1.8	1.98 V	299	61.4	5.0
3	*5985.00	106.9 PK			1.98 V	299	64.3	42.6
4	*5985.00	94.1 AV			1.98 V	299	51.5	42.6
5	11970.00	53.4 PK	74.0	-20.6	1.78 V	219	44.8	8.6
6	11970.00	46.1 AV	54.0	-7.9	1.78 V	219	37.5	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	114.0 PK			1.00 H	1	70.2	43.8
2	*6225.00	101.0 AV			1.00 H	1	57.2	43.8
3	12450.00	56.1 PK	74.0	-17.9	2.68 H	318	46.9	9.2
4	12450.00	47.9 AV	54.0	-6.1	2.68 H	318	38.7	9.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.6 PK			2.06 V	284	68.8	43.8
2	*6225.00	99.7 AV			2.06 V	284	55.9	43.8
3	12450.00	53.9 PK	74.0	-20.1	1.82 V	221	44.7	9.2
4	12450.00	46.9 AV	54.0	-7.1	1.82 V	221	37.7	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	114.4 PK			1.01 H	1	69.7	44.7
2	*6385.00	101.5 AV			1.01 H	1	56.8	44.7
3	#12770.00	56.8 PK	88.2	-31.4	2.68 H	325	47.1	9.7
4	#12770.00	48.8 AV	68.2	-19.4	2.68 H	325	39.1	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	113.5 PK			2.06 V	285	68.8	44.7
2	*6385.00	99.9 AV			2.06 V	285	55.2	44.7
3	#12770.00	54.5 PK	88.2	-33.7	1.85 V	223	44.8	9.7
4	#12770.00	47.5 AV	68.2	-20.7	1.85 V	223	37.8	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	114.1 PK			1.14 H	2	68.9	45.2
2	*6625.00	100.8 AV			1.14 H	2	55.6	45.2
3	13250.00	56.5 PK	74.0	-17.5	2.79 H	329	47.0	9.5
4	13250.00	48.4 AV	54.0	-5.6	2.79 H	329	38.9	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	113.0 PK			2.07 V	284	67.8	45.2
2	*6625.00	99.9 AV			2.07 V	284	54.7	45.2
3	13250.00	54.2 PK	74.0	-19.8	1.77 V	228	44.7	9.5
4	13250.00	47.2 AV	54.0	-6.8	1.77 V	228	37.7	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	114.3 PK			1.06 H	2	68.9	45.4
2	*6705.00	104.2 AV			1.06 H	2	58.8	45.4
3	#13410.00	57.0 PK	88.2	-31.2	2.75 H	325	47.0	10.0
4	#13410.00	48.9 AV	68.2	-19.3	2.75 H	325	38.9	10.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.5 PK			2.07 V	283	67.1	45.4
2	*6705.00	99.5 AV			2.07 V	283	54.1	45.4
3	#13410.00	54.7 PK	88.2	-33.5	1.75 V	224	44.7	10.0
4	#13410.00	47.7 AV	68.2	-20.5	1.75 V	224	37.7	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.9 PK			1.07 H	1	68.6	45.3
2	*6785.00	101.2 AV			1.07 H	1	55.9	45.3
3	#7125.00	64.1 PK	88.2	-24.1	1.07 H	1	56.2	7.9
4	#7125.00	52.3 AV	68.2	-15.9	1.07 H	1	44.4	7.9
5	#13570.00	56.2 PK	88.2	-32.0	2.78 H	325	47.0	9.2
6	#13570.00	48.1 AV	68.2	-20.1	2.78 H	325	38.9	9.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.0 PK			2.03 V	283	67.7	45.3
2	*6785.00	99.6 AV			2.03 V	283	54.3	45.3
3	#7125.00	63.9 PK	88.2	-24.3	2.03 V	283	56.0	7.9
4	#7125.00	52.1 AV	68.2	-16.1	2.03 V	283	44.2	7.9
5	#13570.00	54.0 PK	88.2	-34.2	1.75 V	225	44.8	9.2
6	#13570.00	47.0 AV	68.2	-21.2	1.75 V	225	37.8	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	86.7 PK	88.2	-1.5	1.04 H	1	81.7	5.0
2	#5925.00	61.1 AV	68.2	-7.1	1.04 H	1	56.1	5.0
3	*6025.00	105.7 PK			1.04 H	1	63.0	42.7
4	*6025.00	93.4 AV			1.04 H	1	50.7	42.7
5	12050.00	55.5 PK	74.0	-18.5	2.81 H	318	46.8	8.7
6	12050.00	47.4 AV	54.0	-6.6	2.81 H	318	38.7	8.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.7 PK	88.2	-3.5	1.98 V	285	79.7	5.0
2	#5925.00	58.3 AV	68.2	-9.9	1.98 V	285	53.3	5.0
3	*6025.00	104.3 PK			1.98 V	285	61.6	42.7
4	*6025.00	91.9 AV			1.98 V	285	49.2	42.7
5	12050.00	53.4 PK	74.0	-20.6	1.77 V	225	44.7	8.7
6	12050.00	46.2 AV	54.0	-7.8	1.77 V	225	37.5	8.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	109.5 PK			1.05 H	7	66.0	43.5
2	*6185.00	96.6 AV			1.05 H	7	53.1	43.5
3	12370.00	56.1 PK	74.0	-17.9	2.80 H	322	47.0	9.1
4	12370.00	47.8 AV	54.0	-6.2	2.80 H	322	38.7	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	108.5 PK			2.05 V	284	65.0	43.5
2	*6185.00	95.4 AV			2.05 V	284	51.9	43.5
3	12370.00	53.6 PK	74.0	-20.4	1.75 V	224	44.5	9.1
4	12370.00	46.3 AV	54.0	-7.7	1.75 V	224	37.2	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.2 PK			1.06 H	5	65.8	44.4
2	*6345.00	97.6 AV			1.06 H	5	53.2	44.4
3	12690.00	56.7 PK	74.0	-17.3	2.75 H	321	47.0	9.7
4	12690.00	48.5 AV	54.0	-5.5	2.75 H	321	38.8	9.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	109.0 PK			2.04 V	284	64.6	44.4
2	*6345.00	96.0 AV			2.04 V	284	51.6	44.4
3	12690.00	54.5 PK	74.0	-19.5	1.78 V	226	44.8	9.7
4	12690.00	47.2 AV	54.0	-6.8	1.78 V	226	37.5	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	111.0 PK			1.13 H	3	65.6	45.4
2	*6665.00	97.8 AV			1.13 H	3	52.4	45.4
3	#7125.00	64.2 PK	88.2	-24.0	1.13 H	3	56.3	7.9
4	#7125.00	52.2 AV	68.2	-16.0	1.13 H	3	44.3	7.9
5	13330.00	56.8 PK	74.0	-17.2	2.74 H	319	47.0	9.8
6	13330.00	48.7 AV	54.0	-5.3	2.74 H	319	38.9	9.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.8 PK			2.03 V	284	63.4	45.4
2	*6665.00	96.5 AV			2.03 V	284	51.1	45.4
3	#7125.00	63.9 PK	88.2	-24.3	2.03 V	284	56.0	7.9
4	#7125.00	51.9 AV	68.2	-16.3	2.03 V	284	44.0	7.9
5	13330.00	54.6 PK	74.0	-19.4	1.81 V	229	44.8	9.8
6	13330.00	47.4 AV	54.0	-6.6	1.81 V	229	37.6	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Partial RU_1TX

26-tone RU

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	85.4 PK	88.2	-2.8	2.29 H	48	80.4	5.0
2	#5925.00	50.0 AV	68.2	-18.2	2.29 H	48	45.0	5.0
3	*5955.00	121.0 PK			2.29 H	48	78.4	42.6
4	*5955.00	111.5 AV			2.29 H	48	68.9	42.6
5	11910.00	57.9 PK	74.0	-16.1	2.24 H	318	49.4	8.5
6	11910.00	45.2 AV	54.0	-8.8	2.24 H	318	36.7	8.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.6 PK	88.2	-5.6	2.19 V	284	77.6	5.0
2	#5925.00	49.8 AV	68.2	-18.4	2.19 V	284	44.8	5.0
3	*5955.00	119.8 PK			2.19 V	284	77.2	42.6
4	*5955.00	110.1 AV			2.19 V	284	67.5	42.6
5	11910.00	57.1 PK	74.0	-16.9	1.15 V	356	48.6	8.5
6	11910.00	44.7 AV	54.0	-9.3	1.15 V	356	36.2	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	124.9 PK			2.18 H	48	81.3	43.6
2	*6195.00	115.7 AV			2.18 H	48	72.1	43.6
3	12390.00	59.5 PK	74.0	-14.5	2.28 H	315	50.4	9.1
4	12390.00	48.3 AV	54.0	-5.7	2.28 H	315	39.2	9.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	123.7 PK			2.09 V	285	80.1	43.6
2	*6195.00	114.3 AV			2.09 V	285	70.7	43.6
3	12390.00	58.2 PK	74.0	-15.8	1.17 V	347	49.1	9.1
4	12390.00	45.7 AV	54.0	-8.3	1.17 V	347	36.6	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	125.2 PK			2.33 H	359	80.3	44.9
2	*6415.00	116.1 AV			2.33 H	359	71.2	44.9
3	#12830.00	60.6 PK	88.2	-27.6	2.13 H	316	50.9	9.7
4	#12830.00	49.1 AV	68.2	-19.1	2.13 H	316	39.4	9.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	124.0 PK			2.15 V	279	79.1	44.9
2	*6415.00	114.6 AV			2.15 V	279	69.7	44.9
3	#12830.00	59.3 PK	88.2	-28.9	1.18 V	346	49.6	9.7
4	#12830.00	46.8 AV	68.2	-21.4	1.18 V	346	37.1	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	126.2 PK			2.41 H	359	80.9	45.3
2	*6535.00	116.8 AV			2.41 H	359	71.5	45.3
3	#13070.00	63.8 PK	88.2	-24.4	2.26 H	317	54.4	9.4
4	#13070.00	51.7 AV	68.2	-16.5	2.26 H	317	42.3	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	124.8 PK			2.20 V	291	79.5	45.3
2	*6535.00	115.4 AV			2.20 V	291	70.1	45.3
3	#13070.00	60.9 PK	88.2	-27.3	1.10 V	356	51.5	9.4
4	#13070.00	49.2 AV	68.2	-19.0	1.10 V	356	39.8	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	124.3 PK			2.39 H	2	78.9	45.4
2	*6695.00	113.9 AV			2.39 H	2	68.5	45.4
3	13390.00	61.3 PK	74.0	-12.7	2.21 H	68	51.2	10.1
4	13390.00	47.7 AV	54.0	-6.3	2.21 H	68	37.6	10.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.2 PK			1.00 V	59	76.8	45.4
2	*6695.00	111.8 AV			1.00 V	59	66.4	45.4
3	#13990.00	58.8 PK	88.2	-29.4	1.27 V	42	48.9	9.9
4	#13990.00	46.7 AV	68.2	-21.5	1.27 V	42	36.8	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	124.0 PK			1.24 H	62	78.5	45.5
2	*6855.00	113.9 AV			1.24 H	62	68.4	45.5
3	#13710.00	59.6 PK	88.2	-28.6	1.29 H	34	50.2	9.4
4	#13710.00	46.6 AV	68.2	-21.6	1.29 H	34	37.2	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.7 PK			1.35 V	26	76.2	45.5
2	*6855.00	111.7 AV			1.35 V	26	66.2	45.5
3	#13710.00	57.9 PK	88.2	-30.3	1.36 V	54	48.5	9.4
4	#13710.00	45.6 AV	68.2	-22.6	1.36 V	54	36.2	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RU_52

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	85.5 PK	88.2	-2.7	2.22 H	46	80.5	5.0
2	#5925.00	51.4 AV	68.2	-16.8	2.22 H	46	46.4	5.0
3	*5955.00	120.7 PK			2.22 H	46	78.1	42.6
4	*5955.00	109.9 AV			2.22 H	46	67.3	42.6
5	11910.00	57.7 PK	74.0	-16.3	2.25 H	314	49.2	8.5
6	11910.00	45.1 AV	54.0	-8.9	2.25 H	314	36.6	8.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.6 PK	88.2	-3.6	2.17 V	279	79.6	5.0
2	#5925.00	50.8 AV	68.2	-17.4	2.17 V	279	45.8	5.0
3	*5955.00	119.5 PK			2.17 V	279	76.9	42.6
4	*5955.00	108.7 AV			2.17 V	279	66.1	42.6
5	11910.00	57.2 PK	74.0	-16.8	1.18 V	347	48.7	8.5
6	11910.00	44.9 AV	54.0	-9.1	1.18 V	347	36.4	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.7 PK			2.38 H	47	79.1	43.6
2	*6195.00	113.0 AV			2.38 H	47	69.4	43.6
3	12390.00	59.2 PK	74.0	-14.8	2.15 H	323	50.1	9.1
4	12390.00	46.7 AV	54.0	-7.3	2.15 H	323	37.6	9.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.4 PK			2.18 V	291	77.8	43.6
2	*6195.00	111.7 AV			2.18 V	291	68.1	43.6
3	12390.00	57.8 PK	74.0	-16.2	1.16 V	348	48.7	9.1
4	12390.00	45.3 AV	54.0	-8.7	1.16 V	348	36.2	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.7 PK			2.55 H	2	78.8	44.9
2	*6415.00	113.5 AV			2.55 H	2	68.6	44.9
3	#12830.00	59.6 PK	88.2	-28.6	2.26 H	319	49.9	9.7
4	#12830.00	47.3 AV	68.2	-20.9	2.26 H	319	37.6	9.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.2 PK			2.04 V	274	77.3	44.9
2	*6415.00	112.1 AV			2.04 V	274	67.2	44.9
3	#12830.00	58.3 PK	88.2	-29.9	1.17 V	354	48.6	9.7
4	#12830.00	46.0 AV	68.2	-22.2	1.17 V	354	36.3	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	124.6 PK			2.40 H	359	79.3	45.3
2	*6535.00	114.2 AV			2.40 H	359	68.9	45.3
3	#13070.00	62.8 PK	88.2	-25.4	2.26 H	314	53.4	9.4
4	#13070.00	51.1 AV	68.2	-17.1	2.26 H	314	41.7	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.2 PK			2.14 V	277	76.9	45.3
2	*6535.00	112.9 AV			2.14 V	277	67.6	45.3
3	#13070.00	60.0 PK	88.2	-28.2	1.14 V	358	50.6	9.4
4	#13070.00	48.7 AV	68.2	-19.5	1.14 V	358	39.3	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.8 PK			2.46 H	0	76.4	45.4
2	*6695.00	110.6 AV			2.46 H	0	65.2	45.4
3	#13990.00	60.3 PK	88.2	-27.9	2.08 H	60	50.4	9.9
4	#13990.00	47.8 AV	68.2	-20.4	2.08 H	60	37.9	9.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.9 PK			2.57 V	10	74.5	45.4
2	*6695.00	108.6 AV			2.57 V	10	63.2	45.4
3	#13990.00	58.8 PK	88.2	-29.4	2.14 V	36	48.9	9.9
4	#13990.00	46.7 AV	68.2	-21.5	2.14 V	36	36.8	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.7 PK			1.28 H	41	76.2	45.5
2	*6855.00	110.8 AV			1.28 H	41	65.3	45.5
3	#13710.00	61.8 PK	88.2	-26.4	1.27 H	55	52.4	9.4
4	#13710.00	47.9 AV	68.2	-20.3	1.27 H	55	38.5	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.8 PK			1.27 V	63	74.3	45.5
2	*6855.00	108.0 AV			1.27 V	63	62.5	45.5
3	#13710.00	57.7 PK	88.2	-30.5	1.33 V	45	48.3	9.4
4	#13710.00	46.4 AV	68.2	-21.8	1.33 V	45	37.0	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

106-tone RU

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	85.2 PK	88.2	-3.0	2.22 H	46	80.2	5.0
2	#5925.00	60.8 AV	68.2	-7.4	2.22 H	46	55.8	5.0
3	*5955.00	122.3 PK			2.22 H	46	79.7	42.6
4	*5955.00	111.4 AV			2.22 H	46	68.8	42.6
5	11910.00	58.0 PK	74.0	-16.0	2.17 H	311	49.5	8.5
6	11910.00	45.2 AV	54.0	-8.8	2.17 H	311	36.7	8.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.5 PK	88.2	-5.7	2.12 V	278	77.5	5.0
2	#5925.00	59.9 AV	68.2	-8.3	2.12 V	278	54.9	5.0
3	*5955.00	121.0 PK			2.12 V	278	78.4	42.6
4	*5955.00	110.1 AV			2.12 V	278	67.5	42.6
5	11910.00	57.3 PK	74.0	-16.7	1.18 V	351	48.8	8.5
6	11910.00	44.7 AV	54.0	-9.3	1.18 V	351	36.2	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.9 PK			2.27 H	49	77.3	43.6
2	*6195.00	109.7 AV			2.27 H	49	66.1	43.6
3	12390.00	58.4 PK	74.0	-15.6	2.28 H	316	49.3	9.1
4	12390.00	46.2 AV	54.0	-7.8	2.28 H	316	37.1	9.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.4 PK			2.08 V	284	75.8	43.6
2	*6195.00	108.3 AV			2.08 V	284	64.7	43.6
3	12390.00	57.8 PK	74.0	-16.2	1.18 V	355	48.7	9.1
4	12390.00	45.4 AV	54.0	-8.6	1.18 V	355	36.3	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.9 PK			2.37 H	3	77.0	44.9
2	*6415.00	110.8 AV			2.37 H	3	65.9	44.9
3	#12830.00	59.1 PK	88.2	-29.1	2.26 H	307	49.4	9.7
4	#12830.00	46.5 AV	68.2	-21.7	2.26 H	307	36.8	9.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.5 PK			2.08 V	276	75.6	44.9
2	*6415.00	109.5 AV			2.08 V	276	64.6	44.9
3	#12830.00	58.4 PK	88.2	-29.8	1.16 V	347	48.7	9.7
4	#12830.00	46.0 AV	68.2	-22.2	1.16 V	347	36.3	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.4 PK			2.36 H	356	77.1	45.3
2	*6535.00	110.8 AV			2.36 H	356	65.5	45.3
3	#13070.00	60.8 PK	88.2	-27.4	1.19 H	355	51.4	9.4
4	#13070.00	49.1 AV	68.2	-19.1	1.19 H	355	39.7	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.2 PK			2.08 V	288	75.9	45.3
2	*6535.00	109.6 AV			2.08 V	288	64.3	45.3
3	#13070.00	58.8 PK	88.2	-29.4	1.15 V	347	49.4	9.4
4	#13070.00	46.7 AV	68.2	-21.5	1.15 V	347	37.3	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.3 PK			1.03 H	357	74.9	45.4
2	*6695.00	107.7 AV			1.03 H	357	62.3	45.4
3	#13990.00	60.6 PK	88.2	-27.6	1.10 H	11	50.7	9.9
4	#13990.00	47.2 AV	68.2	-21.0	1.10 H	11	37.3	9.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.5 PK			1.11 V	19	72.1	45.4
2	*6695.00	105.6 AV			1.11 V	19	60.2	45.4
3	#13990.00	58.5 PK	88.2	-29.7	1.17 V	16	48.6	9.9
4	#13990.00	47.5 AV	68.2	-20.7	1.17 V	16	37.6	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.0 PK			1.28 H	63	74.5	45.5
2	*6855.00	107.8 AV			1.28 H	63	62.3	45.5
3	#13710.00	60.9 PK	88.2	-27.3	1.36 H	48	51.5	9.4
4	#13710.00	47.4 AV	68.2	-20.8	1.36 H	48	38.0	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.1 PK			1.45 V	95	72.6	45.5
2	*6855.00	106.3 AV			1.45 V	95	60.8	45.5
3	#13710.00	57.7 PK	88.2	-30.5	1.26 V	35	48.3	9.4
4	#13710.00	46.0 AV	68.2	-22.2	1.26 V	35	36.6	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.0 PK	88.2	-16.2	1.08 H	359	67.0	5.0
2	#5925.00	57.3 AV	68.2	-10.9	1.08 H	359	52.3	5.0
3	*5955.00	115.7 PK			1.08 H	359	73.1	42.6
4	*5955.00	107.6 AV			1.08 H	359	65.0	42.6
5	11910.00	55.1 PK	74.0	-18.9	2.70 H	317	46.6	8.5
6	11910.00	47.1 AV	54.0	-6.9	2.70 H	317	38.6	8.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.7 PK	88.2	-17.5	2.18 V	303	65.7	5.0
2	#5925.00	56.3 AV	68.2	-11.9	2.18 V	303	51.3	5.0
3	*5955.00	111.5 PK			2.18 V	303	68.9	42.6
4	*5955.00	104.3 AV			2.18 V	303	61.7	42.6
5	11910.00	54.3 PK	74.0	-19.7	1.68 V	195	45.8	8.5
6	11910.00	46.6 AV	54.0	-7.4	1.68 V	195	38.1	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	114.3 PK			1.00 H	54	70.7	43.6
2	*6195.00	106.6 AV			1.00 H	54	63.0	43.6
3	12390.00	54.3 PK	74.0	-19.7	1.69 H	40	45.2	9.1
4	12390.00	46.0 AV	54.0	-8.0	1.69 H	40	36.9	9.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	110.3 PK			2.20 V	304	66.7	43.6
2	*6195.00	102.6 AV			2.20 V	304	59.0	43.6
3	12390.00	53.6 PK	74.0	-20.4	3.04 V	192	44.5	9.1
4	12390.00	45.1 AV	54.0	-8.9	3.04 V	192	36.0	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.5 PK			1.00 H	312	68.6	44.9
2	*6415.00	106.5 AV			1.00 H	312	61.6	44.9
3	#12830.00	54.6 PK	88.2	-33.6	1.05 H	302	44.9	9.7
4	#12830.00	46.6 AV	68.2	-21.6	1.05 H	302	36.9	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.4 PK			2.19 V	305	64.5	44.9
2	*6415.00	102.4 AV			2.19 V	305	57.5	44.9
3	#12830.00	53.5 PK	88.2	-34.7	3.80 V	357	43.8	9.7
4	#12830.00	46.4 AV	68.2	-21.8	3.80 V	357	36.7	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.9 PK			1.00 H	312	68.6	45.3
2	*6535.00	106.9 AV			1.00 H	312	61.6	45.3
3	#13070.00	55.1 PK	88.2	-33.1	2.37 H	77	45.7	9.4
4	#13070.00	47.0 AV	68.2	-21.2	2.37 H	77	37.6	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.7 PK			2.18 V	302	64.4	45.3
2	*6535.00	102.7 AV			2.18 V	302	57.4	45.3
3	#13070.00	54.0 PK	88.2	-34.2	3.66 V	136	44.6	9.4
4	#13070.00	46.4 AV	68.2	-21.8	3.66 V	136	37.0	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.9 PK			1.00 H	311	68.5	45.4
2	*6695.00	106.6 AV			1.00 H	311	61.2	45.4
3	13390.00	56.9 PK	74.0	-17.1	2.16 H	338	46.8	10.1
4	13390.00	49.4 AV	54.0	-4.6	2.16 H	338	39.3	10.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.9 PK			2.21 V	305	64.5	45.4
2	*6695.00	102.6 AV			2.21 V	305	57.2	45.4
3	13390.00	56.4 PK	74.0	-17.6	2.59 V	42	46.3	10.1
4	13390.00	48.7 AV	54.0	-5.3	2.59 V	42	38.6	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.8 PK			1.00 H	309	68.3	45.5
2	*6855.00	106.4 AV			1.00 H	309	60.9	45.5
3	#7125.00	62.7 PK	88.2	-25.5	1.00 H	309	54.8	7.9
4	#7125.00	51.8 AV	68.2	-16.4	1.00 H	309	43.9	7.9
5	#13710.00	56.6 PK	88.2	-31.6	1.95 H	128	47.2	9.4
6	#13710.00	48.7 AV	68.2	-19.5	1.95 H	128	39.3	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.0 PK			2.07 V	296	63.5	45.5
2	*6855.00	102.0 AV			2.07 V	296	56.5	45.5
3	#7125.00	62.5 PK	88.2	-25.7	2.07 V	296	54.6	7.9
4	#7125.00	51.6 AV	68.2	-16.6	2.07 V	296	43.7	7.9
5	#13710.00	56.1 PK	88.2	-32.1	3.61 V	175	46.7	9.4
6	#13710.00	47.7 AV	68.2	-20.5	3.61 V	175	38.3	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.4 PK	88.2	-5.8	1.02 H	316	77.4	5.0
2	#5925.00	65.8 AV	68.2	-2.4	1.02 H	316	60.8	5.0
3	*5955.00	118.1 PK			1.02 H	316	75.5	42.6
4	*5955.00	107.3 AV			1.02 H	316	64.7	42.6
5	11910.00	54.8 PK	74.0	-19.2	1.14 H	312	46.3	8.5
6	11910.00	47.0 AV	54.0	-7.0	1.14 H	312	38.5	8.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.1 PK	88.2	-9.1	1.41 V	293	74.1	5.0
2	#5925.00	63.6 AV	68.2	-4.6	1.41 V	293	58.6	5.0
3	*5955.00	116.5 PK			1.41 V	293	73.9	42.6
4	*5955.00	105.8 AV			1.41 V	293	63.2	42.6
5	11910.00	54.1 PK	74.0	-19.9	3.30 V	288	45.6	8.5
6	11910.00	46.6 AV	54.0	-7.4	3.30 V	288	38.1	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.4 PK			1.00 H	316	74.8	43.6
2	*6195.00	107.6 AV			1.00 H	316	64.0	43.6
3	12390.00	54.4 PK	74.0	-19.6	1.72 H	339	45.3	9.1
4	12390.00	45.5 AV	54.0	-8.5	1.72 H	339	36.4	9.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.8 PK			1.88 V	326	73.2	43.6
2	*6195.00	106.0 AV			1.88 V	326	62.4	43.6
3	12390.00	53.5 PK	74.0	-20.5	4.00 V	316	44.4	9.1
4	12390.00	44.8 AV	54.0	-9.2	4.00 V	316	35.7	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.1 PK			1.00 H	314	73.2	44.9
2	*6415.00	107.3 AV			1.00 H	314	62.4	44.9
3	#12830.00	51.4 PK	88.2	-36.8	2.85 H	291	41.7	9.7
4	#12830.00	43.4 AV	68.2	-24.8	2.85 H	291	33.7	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.5 PK			1.90 V	330	71.6	44.9
2	*6415.00	105.7 AV			1.90 V	330	60.8	44.9
3	#12830.00	53.9 PK	88.2	-34.3	1.82 V	81	44.2	9.7
4	#12830.00	46.3 AV	68.2	-21.9	1.82 V	81	36.6	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.7 PK			1.00 H	325	73.4	45.3
2	*6535.00	107.9 AV			1.00 H	325	62.6	45.3
3	#13070.00	54.9 PK	88.2	-33.3	3.90 H	169	45.5	9.4
4	#13070.00	47.0 AV	68.2	-21.2	3.90 H	169	37.6	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.1 PK			1.92 V	330	71.8	45.3
2	*6535.00	106.3 AV			1.92 V	330	61.0	45.3
3	#13070.00	54.3 PK	88.2	-33.9	1.44 V	83	44.9	9.4
4	#13070.00	46.7 AV	68.2	-21.5	1.44 V	83	37.3	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.7 PK			1.00 H	314	73.3	45.4
2	*6695.00	107.9 AV			1.00 H	314	62.5	45.4
3	13390.00	57.1 PK	74.0	-16.9	1.68 H	305	47.0	10.1
4	13390.00	49.3 AV	54.0	-4.7	1.68 H	305	39.2	10.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.1 PK			1.89 V	331	71.7	45.4
2	*6695.00	106.3 AV			1.89 V	331	60.9	45.4
3	13390.00	55.9 PK	74.0	-18.1	1.98 V	208	45.8	10.1
4	13390.00	48.8 AV	54.0	-5.2	1.98 V	208	38.7	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.3 PK			1.00 H	321	72.8	45.5
2	*6855.00	107.5 AV			1.00 H	321	62.0	45.5
3	#7125.00	62.2 PK	88.2	-26.0	1.00 H	321	54.3	7.9
4	#7125.00	51.8 AV	68.2	-16.4	1.00 H	321	43.9	7.9
5	#13710.00	57.0 PK	88.2	-31.2	1.92 H	139	47.6	9.4
6	#13710.00	48.6 AV	68.2	-19.6	1.92 H	139	39.2	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.7 PK			2.39 V	329	71.2	45.5
2	*6855.00	105.9 AV			2.39 V	329	60.4	45.5
3	#7125.00	62.0 PK	88.2	-26.2	2.39 V	329	54.1	7.9
4	#7125.00	51.6 AV	68.2	-16.6	2.39 V	329	43.7	7.9
5	#13710.00	55.6 PK	88.2	-32.6	1.30 V	324	46.2	9.4
6	#13710.00	48.2 AV	68.2	-20.0	1.30 V	324	38.8	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.7 PK	88.2	-5.5	1.06 H	318	77.7	5.0
2	#5925.00	66.5 AV	68.2	-1.7	1.06 H	318	61.5	5.0
3	*5965.00	114.3 PK			1.06 H	318	71.7	42.6
4	*5965.00	104.3 AV			1.06 H	318	61.7	42.6
5	11930.00	61.1 PK	74.0	-12.9	2.74 H	105	52.6	8.5
6	11930.00	49.4 AV	54.0	-4.6	2.74 H	105	40.9	8.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5922.37	82.0 PK	88.2	-6.2	1.42 V	322	77.0	5.0
2	#5922.37	65.0 AV	68.2	-3.2	1.42 V	322	60.0	5.0
3	*5965.00	113.0 PK			1.42 V	322	70.4	42.6
4	*5965.00	102.7 AV			1.42 V	322	60.1	42.6
5	11930.00	58.8 PK	74.0	-15.2	1.53 V	265	50.3	8.5
6	11930.00	49.0 AV	54.0	-5.0	1.53 V	265	40.5	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	117.9 PK			1.00 H	316	74.2	43.7
2	*6205.00	107.3 AV			1.00 H	316	63.6	43.7
3	12410.00	59.4 PK	74.0	-14.6	2.25 H	167	50.2	9.2
4	12410.00	48.9 AV	54.0	-5.1	2.25 H	167	39.7	9.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.2 PK			1.36 V	319	70.5	43.7
2	*6205.00	105.0 AV			1.36 V	319	61.3	43.7
3	12410.00	58.3 PK	74.0	-15.7	3.24 V	178	49.1	9.2
4	12410.00	48.4 AV	54.0	-5.6	3.24 V	178	39.2	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	116.4 PK			1.00 H	7	71.6	44.8
2	*6405.00	108.0 AV			1.00 H	7	63.2	44.8
3	#12810.00	60.2 PK	88.2	-28.0	2.54 H	118	50.4	9.8
4	#12810.00	49.7 AV	68.2	-18.5	2.54 H	118	39.9	9.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	116.0 PK			1.25 V	296	71.2	44.8
2	*6405.00	107.6 AV			1.25 V	296	62.8	44.8
3	#12810.00	58.8 PK	88.2	-29.4	3.44 V	287	49.0	9.8
4	#12810.00	48.7 AV	68.2	-19.5	3.44 V	287	38.9	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	117.4 PK			1.00 H	7	72.2	45.2
2	*6565.00	107.9 AV			1.00 H	7	62.7	45.2
3	#13130.00	60.3 PK	88.2	-27.9	2.32 H	156	50.7	9.6
4	#13130.00	50.1 AV	68.2	-18.1	2.32 H	156	40.5	9.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	117.2 PK			1.14 V	295	72.0	45.2
2	*6565.00	107.6 AV			1.14 V	295	62.4	45.2
3	#13130.00	59.3 PK	88.2	-28.9	2.54 V	153	49.7	9.6
4	#13130.00	49.2 AV	68.2	-19.0	2.54 V	153	39.6	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	117.1 PK			1.03 H	301	71.7	45.4
2	*6685.00	107.8 AV			1.03 H	301	62.4	45.4
3	13370.00	59.1 PK	74.0	-14.9	3.24 H	155	49.1	10.0
4	13370.00	48.9 AV	54.0	-5.1	3.24 H	155	38.9	10.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	117.0 PK			1.07 V	294	71.6	45.4
2	*6685.00	107.6 AV			1.07 V	294	62.2	45.4
3	13370.00	57.8 PK	74.0	-16.2	2.78 V	226	47.8	10.0
4	13370.00	48.2 AV	54.0	-5.8	2.78 V	226	38.2	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	118.9 PK			2.24 H	308	73.4	45.5
2	*6845.00	109.2 AV			2.24 H	308	63.7	45.5
3	#7125.00	63.9 PK	88.2	-24.3	2.24 H	308	56.0	7.9
4	#7125.00	53.0 AV	68.2	-15.2	2.24 H	308	45.1	7.9
5	#13690.00	58.7 PK	88.2	-29.5	1.23 H	254	49.3	9.4
6	#13690.00	48.9 AV	68.2	-19.3	1.23 H	254	39.5	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	116.2 PK			1.20 V	294	70.7	45.5
2	*6845.00	106.7 AV			1.20 V	294	61.2	45.5
3	#7125.00	63.8 PK	88.2	-24.4	1.20 V	294	55.9	7.9
4	#7125.00	52.8 AV	68.2	-15.4	1.20 V	294	44.9	7.9
5	#13690.00	57.9 PK	88.2	-30.3	3.25 V	125	48.5	9.4
6	#13690.00	48.0 AV	68.2	-20.2	3.25 V	125	38.6	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5892.50	82.1 PK	88.2	-6.1	2.41 H	0	77.1	5.0
2	#5892.50	66.5 AV	68.2	-1.7	2.41 H	0	61.5	5.0
3	*5985.00	110.0 PK			2.41 H	0	67.4	42.6
4	*5985.00	100.4 AV			2.41 H	0	57.8	42.6
5	11970.00	58.7 PK	74.0	-15.3	1.53 H	265	50.1	8.6
6	11970.00	48.6 AV	54.0	-5.4	1.53 H	265	40.0	8.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5890.12	78.5 PK	88.2	-9.7	1.27 V	290	73.5	5.0
2	#5890.12	63.1 AV	68.2	-5.1	1.27 V	290	58.1	5.0
3	*5985.00	108.8 PK			1.27 V	290	66.2	42.6
4	*5985.00	99.3 AV			1.27 V	290	56.7	42.6
5	11970.00	57.4 PK	74.0	-16.6	2.25 V	134	48.8	8.6
6	11970.00	47.8 AV	54.0	-6.2	2.25 V	134	39.2	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	113.5 PK			1.49 H	1	69.7	43.8
2	*6225.00	102.4 AV			1.49 H	1	58.6	43.8
3	12450.00	58.1 PK	74.0	-15.9	2.31 H	156	48.9	9.2
4	12450.00	48.0 AV	54.0	-6.0	2.31 H	156	38.8	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	113.4 PK			1.18 V	297	69.6	43.8
2	*6225.00	102.3 AV			1.18 V	297	58.5	43.8
3	12450.00	56.9 PK	74.0	-17.1	1.25 V	265	47.7	9.2
4	12450.00	47.5 AV	54.0	-6.5	1.25 V	265	38.3	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.4 PK			1.00 H	1	67.7	44.7
2	*6385.00	100.8 AV			1.00 H	1	56.1	44.7
3	#12770.00	54.4 PK	88.2	-33.8	1.86 H	89	44.7	9.7
4	#12770.00	46.9 AV	68.2	-21.3	1.86 H	89	37.2	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.9 PK			1.21 V	298	67.2	44.7
2	*6385.00	100.4 AV			1.21 V	298	55.7	44.7
3	#12770.00	54.4 PK	88.2	-33.8	3.02 V	325	44.7	9.7
4	#12770.00	46.5 AV	68.2	-21.7	3.02 V	325	36.8	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	113.4 PK			1.00 H	313	68.2	45.2
2	*6625.00	102.0 AV			1.00 H	313	56.8	45.2
3	13250.00	56.8 PK	74.0	-17.2	2.27 H	282	47.3	9.5
4	13250.00	47.3 AV	54.0	-6.7	2.27 H	282	37.8	9.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	113.0 PK			1.28 V	291	67.8	45.2
2	*6625.00	101.6 AV			1.28 V	291	56.4	45.2
3	13250.00	55.7 PK	74.0	-18.3	3.20 V	183	46.2	9.5
4	13250.00	46.9 AV	54.0	-7.1	3.20 V	183	37.4	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	113.6 PK			1.00 H	319	68.2	45.4
2	*6705.00	102.4 AV			1.00 H	319	57.0	45.4
3	#13410.00	58.1 PK	88.2	-30.1	1.78 H	187	48.1	10.0
4	#13410.00	48.8 AV	68.2	-19.4	1.78 H	187	38.8	10.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	113.0 PK			1.33 V	293	67.6	45.4
2	*6705.00	101.8 AV			1.33 V	293	56.4	45.4
3	#13410.00	56.8 PK	88.2	-31.4	3.39 V	163	46.8	10.0
4	#13410.00	47.7 AV	68.2	-20.5	3.39 V	163	37.7	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.0 PK			1.00 H	318	67.7	45.3
2	*6785.00	101.8 AV			1.00 H	318	56.5	45.3
3	#7125.00	62.7 PK	88.2	-25.5	1.00 H	318	54.8	7.9
4	#7125.00	51.9 AV	68.2	-16.3	1.00 H	318	44.0	7.9
5	#13570.00	57.8 PK	88.2	-30.4	3.76 H	160	48.6	9.2
6	#13570.00	48.9 AV	68.2	-19.3	3.76 H	160	39.7	9.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	112.5 PK			1.35 V	291	67.2	45.3
2	*6785.00	101.3 AV			1.35 V	291	56.0	45.3
3	#7125.00	62.5 PK	88.2	-25.7	1.35 V	291	54.6	7.9
4	#7125.00	51.7 AV	68.2	-16.5	1.35 V	291	43.8	7.9
5	#13570.00	56.5 PK	88.2	-31.7	3.24 V	331	47.3	9.2
6	#13570.00	48.7 AV	68.2	-19.5	3.24 V	331	39.5	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5921.00	80.2 PK	88.2	-8.0	1.00 H	66	75.2	5.0
2	#5921.00	66.5 AV	68.2	-1.7	1.00 H	66	61.5	5.0
3	*6025.00	105.8 PK			1.00 H	66	63.1	42.7
4	*6025.00	95.2 AV			1.00 H	66	52.5	42.7
5	12050.00	55.7 PK	74.0	-18.3	2.04 H	251	47.0	8.7
6	12050.00	46.8 AV	54.0	-7.2	2.04 H	251	38.1	8.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5922.00	77.6 PK	88.2	-10.6	1.15 V	297	72.6	5.0
2	#5922.00	64.2 AV	68.2	-4.0	1.15 V	297	59.2	5.0
3	*6025.00	105.0 PK			1.15 V	297	62.3	42.7
4	*6025.00	94.5 AV			1.15 V	297	51.8	42.7
5	12050.00	55.0 PK	74.0	-19.0	2.27 V	127	46.3	8.7
6	12050.00	46.0 AV	54.0	-8.0	2.27 V	127	37.3	8.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.9 PK			1.00 H	353	62.4	43.5
2	*6185.00	96.7 AV			1.00 H	353	53.2	43.5
3	12370.00	55.1 PK	74.0	-18.9	1.53 H	281	46.0	9.1
4	12370.00	46.3 AV	54.0	-7.7	1.53 H	281	37.2	9.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.4 PK			1.18 V	268	61.9	43.5
2	*6185.00	96.2 AV			1.18 V	268	52.7	43.5
3	12370.00	54.2 PK	74.0	-19.8	3.81 V	295	45.1	9.1
4	12370.00	46.1 AV	54.0	-7.9	3.81 V	295	37.0	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.6 PK			1.00 H	1	62.2	44.4
2	*6345.00	97.4 AV			1.00 H	1	53.0	44.4
3	12690.00	55.5 PK	74.0	-18.5	1.93 H	293	45.8	9.7
4	12690.00	46.3 AV	54.0	-7.7	1.93 H	293	36.6	9.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.0 PK			1.17 V	269	61.6	44.4
2	*6345.00	96.8 AV			1.17 V	269	52.4	44.4
3	12690.00	54.8 PK	74.0	-19.2	2.13 V	178	45.1	9.7
4	12690.00	45.2 AV	54.0	-8.8	2.13 V	178	35.5	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.7 PK			1.00 H	318	60.3	45.4
2	*6665.00	96.5 AV			1.00 H	318	51.1	45.4
3	#7125.00	62.3 PK	88.2	-25.9	1.00 H	318	54.4	7.9
4	#7125.00	52.0 AV	68.2	-16.2	1.00 H	318	44.1	7.9
5	13330.00	57.0 PK	74.0	-17.0	2.61 H	164	47.2	9.8
6	13330.00	48.0 AV	54.0	-6.0	2.61 H	164	38.2	9.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.2 PK			1.19 V	277	59.8	45.4
2	*6665.00	96.0 AV			1.19 V	277	50.6	45.4
3	#7125.00	62.0 PK	88.2	-26.2	1.19 V	277	54.1	7.9
4	#7125.00	51.8 AV	68.2	-16.4	1.19 V	277	43.9	7.9
5	13330.00	56.3 PK	74.0	-17.7	1.46 V	312	46.5	9.8
6	13330.00	47.5 AV	54.0	-6.5	1.46 V	312	37.7	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Partial RU_2TX

26-tone RU

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24°C, 67% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5915.00	85.9 PK	88.2	-2.3	2.33 H	348	80.9	5.0
2	#5915.00	55.7 AV	68.2	-12.5	2.33 H	348	50.7	5.0
3	*5955.00	129.0 PK			2.33 H	348	86.4	42.6
4	*5955.00	116.5 AV			2.33 H	348	73.9	42.6
5	11910.00	56.8 PK	74.0	-17.2	1.18 H	306	48.3	8.5
6	11910.00	43.7 AV	54.0	-10.3	1.18 H	306	35.2	8.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5915.00	82.8 PK	88.2	-5.4	3.23 V	267	77.8	5.0
2	#5915.00	52.7 AV	68.2	-15.5	3.23 V	267	47.7	5.0
3	*5955.00	126.5 PK			3.23 V	267	83.9	42.6
4	*5955.00	114.7 AV			3.23 V	267	72.1	42.6
5	11910.00	55.8 PK	74.0	-18.2	3.16 V	274	47.3	8.5
6	11910.00	43.1 AV	54.0	-10.9	3.16 V	274	34.6	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	127.9 PK			2.36 H	359	84.3	43.6
2	*6195.00	118.3 AV			2.36 H	359	74.7	43.6
3	12390.00	62.2 PK	74.0	-11.8	1.99 H	44	53.1	9.1
4	12390.00	50.0 AV	54.0	-4.0	1.99 H	44	40.9	9.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	126.3 PK			3.34 V	271	82.7	43.6
2	*6195.00	116.7 AV			3.34 V	271	73.1	43.6
3	12390.00	59.8 PK	74.0	-14.2	1.09 V	27	50.7	9.1
4	12390.00	47.6 AV	54.0	-6.4	1.09 V	27	38.5	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	127.9 PK			2.33 H	357	83.0	44.9
2	*6415.00	118.0 AV			2.33 H	357	73.1	44.9
3	#12830.00	62.8 PK	88.2	-25.4	1.91 H	48	53.1	9.7
4	#12830.00	50.5 AV	68.2	-17.7	1.91 H	48	40.8	9.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	126.1 PK			3.26 V	265	81.2	44.9
2	*6415.00	116.3 AV			3.26 V	265	71.4	44.9
3	#12830.00	60.5 PK	88.2	-27.7	1.18 V	40	50.8	9.7
4	#12830.00	48.1 AV	68.2	-20.1	1.18 V	40	38.4	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	128.4 PK			2.19 H	4	83.1	45.3
2	*6535.00	118.5 AV			2.19 H	4	73.2	45.3
3	#13070.00	65.1 PK	88.2	-23.1	1.97 H	56	55.7	9.4
4	#13070.00	52.5 AV	68.2	-15.7	1.97 H	56	43.1	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	126.6 PK			3.17 V	248	81.3	45.3
2	*6535.00	116.8 AV			3.17 V	248	71.5	45.3
3	#13070.00	62.0 PK	88.2	-26.2	1.13 V	34	52.6	9.4
4	#13070.00	50.2 AV	68.2	-18.0	1.13 V	34	40.8	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	127.8 PK			2.21 H	358	82.4	45.4
2	*6695.00	118.2 AV			2.21 H	358	72.8	45.4
3	13390.00	62.4 PK	74.0	-11.6	2.02 H	59	52.3	10.1
4	13390.00	49.5 AV	54.0	-4.5	2.02 H	59	39.4	10.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	126.2 PK			3.16 V	248	80.8	45.4
2	*6695.00	116.5 AV			3.16 V	248	71.1	45.4
3	13390.00	60.3 PK	74.0	-13.7	1.18 V	41	50.2	10.1
4	13390.00	47.3 AV	54.0	-6.7	1.18 V	41	37.2	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	129.0 PK			2.32 H	1	83.5	45.5
2	*6855.00	119.4 AV			2.32 H	1	73.9	45.5
3	#13710.00	64.0 PK	88.2	-24.2	2.01 H	62	54.6	9.4
4	#13710.00	52.2 AV	68.2	-16.0	2.01 H	62	42.8	9.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	127.2 PK			3.14 V	261	81.7	45.5
2	*6855.00	117.6 AV			3.14 V	261	72.1	45.5
3	#13710.00	61.8 PK	88.2	-26.4	1.13 V	51	52.4	9.4
4	#13710.00	49.9 AV	68.2	-18.3	1.13 V	51	40.5	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

52-tone RU

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24°C, 67% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5918.00	84.8 PK	88.2	-3.4	2.25 H	356	79.8	5.0
2	#5918.00	54.9 AV	68.2	-13.3	2.25 H	356	49.9	5.0
3	*5955.00	125.5 PK			2.25 H	356	82.9	42.6
4	*5955.00	114.2 AV			2.25 H	356	71.6	42.6
5	11910.00	56.7 PK	74.0	-17.3	1.21 H	301	48.2	8.5
6	11910.00	43.4 AV	54.0	-10.6	1.21 H	301	34.9	8.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5918.00	83.3 PK	88.2	-4.9	3.22 V	257	78.3	5.0
2	#5918.00	52.8 AV	68.2	-15.4	3.22 V	257	47.8	5.0
3	*5955.00	123.5 PK			3.22 V	257	80.9	42.6
4	*5955.00	112.4 AV			3.22 V	257	69.8	42.6
5	11910.00	55.7 PK	74.0	-18.3	3.10 V	269	47.2	8.5
6	11910.00	43.0 AV	54.0	-11.0	3.10 V	269	34.5	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	125.2 PK			2.42 H	350	81.6	43.6
2	*6195.00	115.3 AV			2.42 H	350	71.7	43.6
3	12390.00	60.9 PK	74.0	-13.1	1.92 H	37	51.8	9.1
4	12390.00	48.4 AV	54.0	-5.6	1.92 H	37	39.3	9.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	123.5 PK			3.22 V	264	79.9	43.6
2	*6195.00	113.7 AV			3.22 V	264	70.1	43.6
3	12390.00	58.4 PK	74.0	-15.6	1.08 V	33	49.3	9.1
4	12390.00	46.0 AV	54.0	-8.0	1.08 V	33	36.9	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	124.7 PK			2.35 H	355	79.8	44.9
2	*6415.00	115.0 AV			2.35 H	355	70.1	44.9
3	#12830.00	60.9 PK	88.2	-27.3	2.03 H	47	51.2	9.7
4	#12830.00	48.5 AV	68.2	-19.7	2.03 H	47	38.8	9.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.1 PK			3.23 V	254	78.2	44.9
2	*6415.00	113.4 AV			3.23 V	254	68.5	44.9
3	#12830.00	58.3 PK	88.2	-29.9	1.07 V	33	48.6	9.7
4	#12830.00	46.0 AV	68.2	-22.2	1.07 V	33	36.3	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	126.9 PK			2.51 H	352	81.6	45.3
2	*6535.00	116.6 AV			2.51 H	352	71.3	45.3
3	#13070.00	63.8 PK	88.2	-24.4	2.12 H	54	54.4	9.4
4	#13070.00	52.0 AV	68.2	-16.2	2.12 H	54	42.6	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	125.1 PK			3.13 V	259	79.8	45.3
2	*6535.00	114.9 AV			3.13 V	259	69.6	45.3
3	#13070.00	61.8 PK	88.2	-26.4	1.17 V	32	52.4	9.4
4	#13070.00	49.7 AV	68.2	-18.5	1.17 V	32	40.3	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	127.2 PK			2.23 H	2	81.8	45.4
2	*6695.00	116.8 AV			2.23 H	2	71.4	45.4
3	13390.00	61.0 PK	74.0	-13.0	1.98 H	58	50.9	10.1
4	13390.00	48.6 AV	54.0	-5.4	1.98 H	58	38.5	10.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	125.6 PK			3.18 V	245	80.2	45.4
2	*6695.00	115.1 AV			3.18 V	245	69.7	45.4
3	13390.00	59.7 PK	74.0	-14.3	1.16 V	31	49.6	10.1
4	13390.00	46.5 AV	54.0	-7.5	1.16 V	31	36.4	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	126.7 PK			2.23 H	356	81.2	45.5
2	*6855.00	116.6 AV			2.23 H	356	71.1	45.5
3	#13710.00	62.5 PK	88.2	-25.7	2.06 H	62	53.1	9.4
4	#13710.00	51.4 AV	68.2	-16.8	2.06 H	62	42.0	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	125.0 PK			3.13 V	256	79.5	45.5
2	*6855.00	114.9 AV			3.13 V	256	69.4	45.5
3	#13710.00	60.9 PK	88.2	-27.3	1.11 V	53	51.5	9.4
4	#13710.00	49.0 AV	68.2	-19.2	1.11 V	53	39.6	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

106-tone RU

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24°C, 67% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.9 PK	88.2	-3.3	2.36 H	348	79.9	5.0
2	#5925.00	50.3 AV	68.2	-17.9	2.36 H	348	45.3	5.0
3	*5955.00	122.2 PK			2.36 H	348	79.6	42.6
4	*5955.00	111.5 AV			2.36 H	348	68.9	42.6
5	11910.00	56.9 PK	74.0	-17.1	1.14 H	309	48.4	8.5
6	11910.00	43.6 AV	54.0	-10.4	1.14 H	309	35.1	8.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.2 PK	88.2	-5.0	3.26 V	264	78.2	5.0
2	#5925.00	49.5 AV	68.2	-18.7	3.26 V	264	44.5	5.0
3	*5955.00	119.6 PK			3.26 V	264	77.0	42.6
4	*5955.00	109.8 AV			3.26 V	264	67.2	42.6
5	11910.00	55.9 PK	74.0	-18.1	3.13 V	281	47.4	8.5
6	11910.00	43.0 AV	54.0	-11.0	3.13 V	281	34.5	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	123.4 PK			2.61 H	350	79.8	43.6
2	*6195.00	113.1 AV			2.61 H	350	69.5	43.6
3	12390.00	59.7 PK	74.0	-14.3	1.93 H	44	50.6	9.1
4	12390.00	47.3 AV	54.0	-6.7	1.93 H	44	38.2	9.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.8 PK			3.17 V	256	78.2	43.6
2	*6195.00	111.4 AV			3.17 V	256	67.8	43.6
3	12390.00	57.8 PK	74.0	-16.2	1.13 V	34	48.7	9.1
4	12390.00	45.4 AV	54.0	-8.6	1.13 V	34	36.3	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.6 PK			2.37 H	355	77.7	44.9
2	*6415.00	112.5 AV			2.37 H	355	67.6	44.9
3	#12830.00	59.2 PK	88.2	-29.0	1.98 H	50	49.5	9.7
4	#12830.00	47.0 AV	68.2	-21.2	1.98 H	50	37.3	9.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.8 PK			3.17 V	269	75.9	44.9
2	*6415.00	110.7 AV			3.17 V	269	65.8	44.9
3	#12830.00	58.4 PK	88.2	-29.8	1.16 V	37	48.7	9.7
4	#12830.00	45.9 AV	68.2	-22.3	1.16 V	37	36.2	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 70% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.8 PK			2.32 H	352	78.5	45.3
2	*6535.00	113.8 AV			2.32 H	352	68.5	45.3
3	#13070.00	62.5 PK	88.2	-25.7	1.97 H	58	53.1	9.4
4	#13070.00	50.0 AV	68.2	-18.2	1.97 H	58	40.6	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.1 PK			3.21 V	254	76.8	45.3
2	*6535.00	112.1 AV			3.21 V	254	66.8	45.3
3	#13070.00	60.2 PK	88.2	-28.0	2.18 V	59	50.8	9.4
4	#13070.00	47.7 AV	68.2	-20.5	2.18 V	59	38.3	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	124.3 PK			2.22 H	2	78.9	45.4
2	*6695.00	114.0 AV			2.22 H	2	68.6	45.4
3	13390.00	60.8 PK	74.0	-13.2	2.07 H	54	50.7	10.1
4	13390.00	47.8 AV	54.0	-6.2	2.07 H	54	37.7	10.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.7 PK			3.16 V	249	77.3	45.4
2	*6695.00	112.3 AV			3.16 V	249	66.9	45.4
3	13390.00	58.9 PK	74.0	-15.1	1.15 V	30	48.8	10.1
4	13390.00	46.4 AV	54.0	-7.6	1.15 V	30	36.3	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Titan HSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	125.0 PK			2.31 H	1	79.5	45.5
2	*6855.00	114.2 AV			2.31 H	1	68.7	45.5
3	#13710.00	62.1 PK	88.2	-26.1	2.12 H	48	52.7	9.4
4	#13710.00	49.3 AV	68.2	-18.9	2.12 H	48	39.9	9.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	123.0 PK			3.13 V	254	77.5	45.5
2	*6855.00	112.4 AV			3.13 V	254	66.9	45.5
3	#13710.00	60.1 PK	88.2	-28.1	1.21 V	48	50.7	9.4
4	#13710.00	47.1 AV	68.2	-21.1	1.21 V	48	37.7	9.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


1TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 1

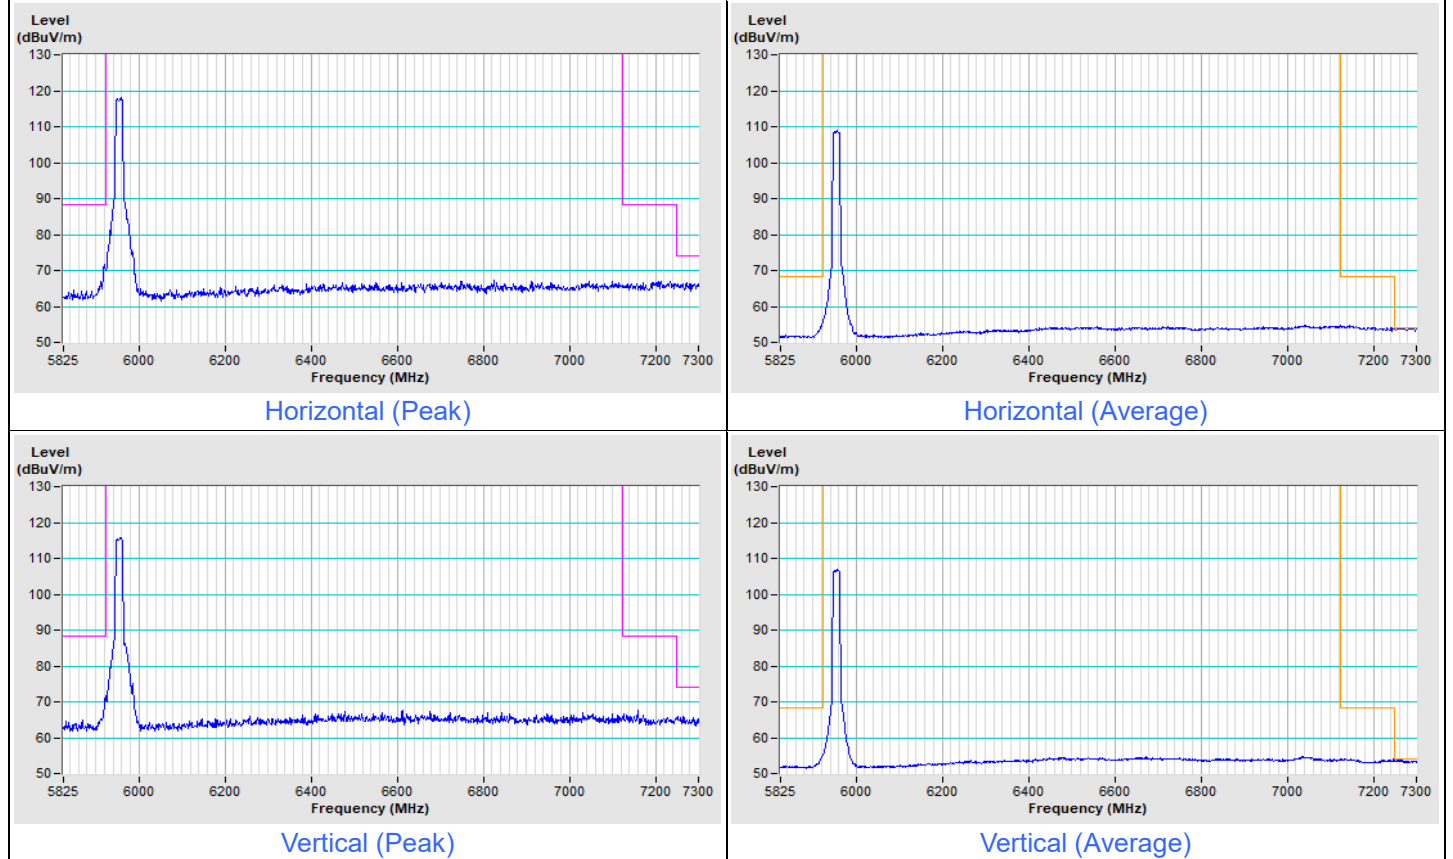


802.11be (EHT20) Channel 1

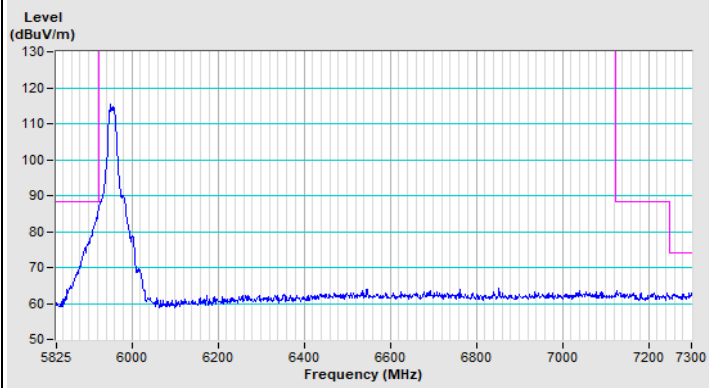


Horizontal (Peak)

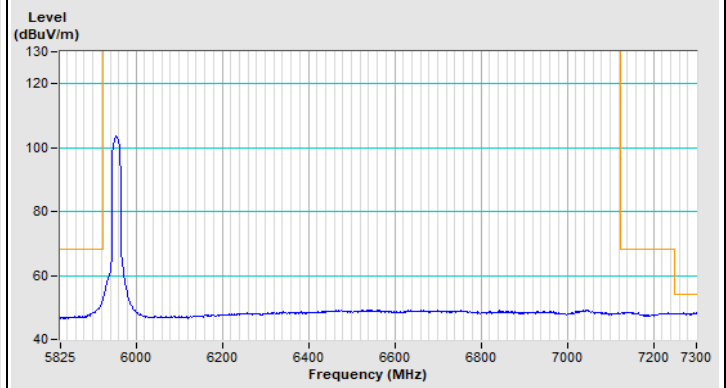

Horizontal (Average)

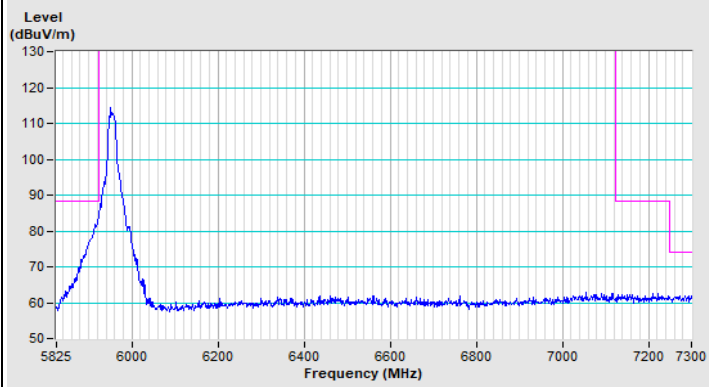


Vertical (Peak)

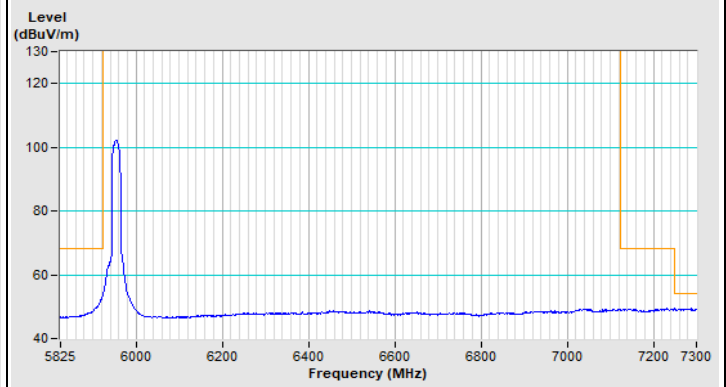

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 3

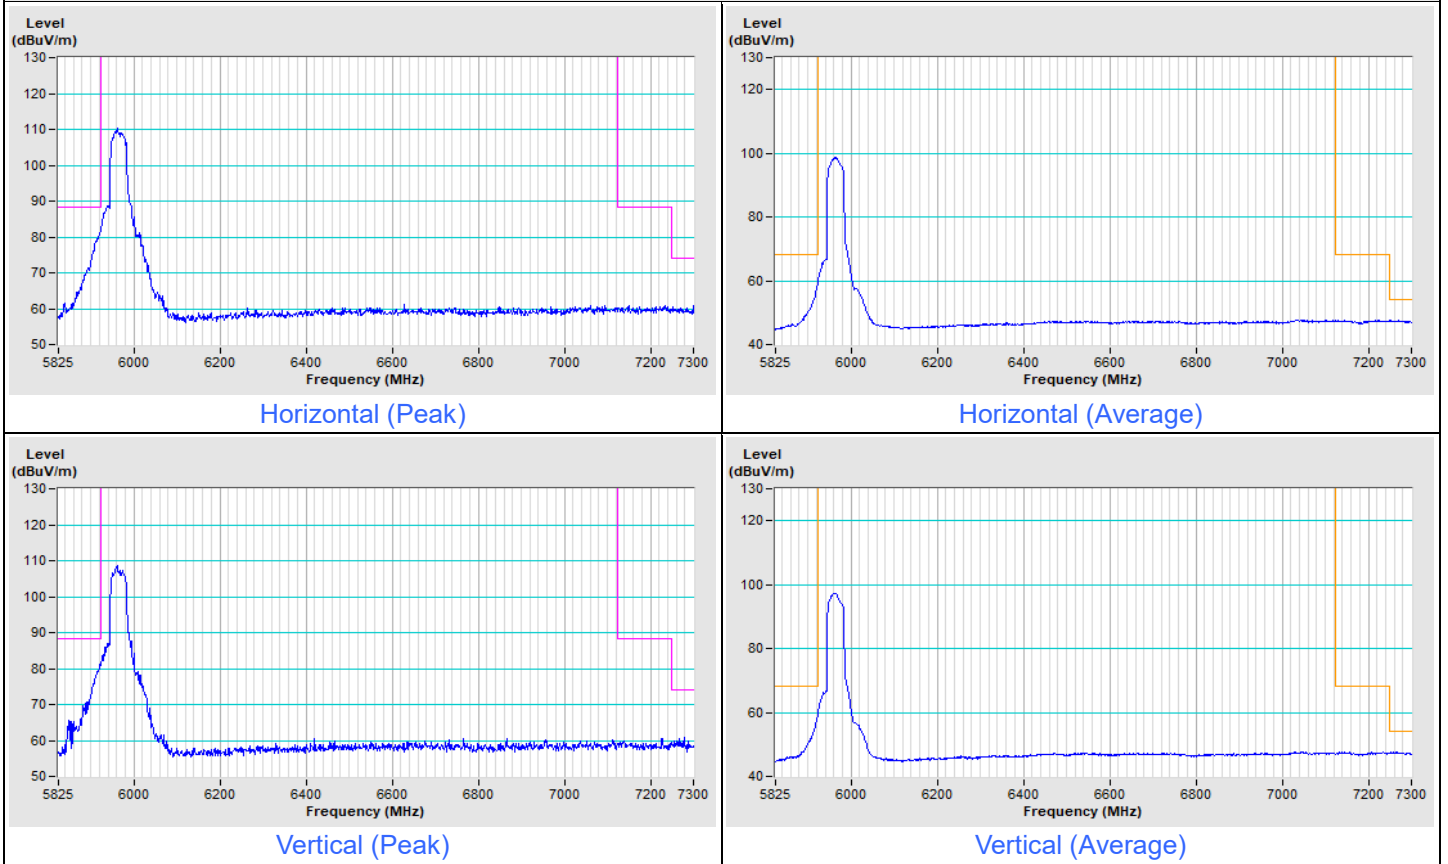


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 7

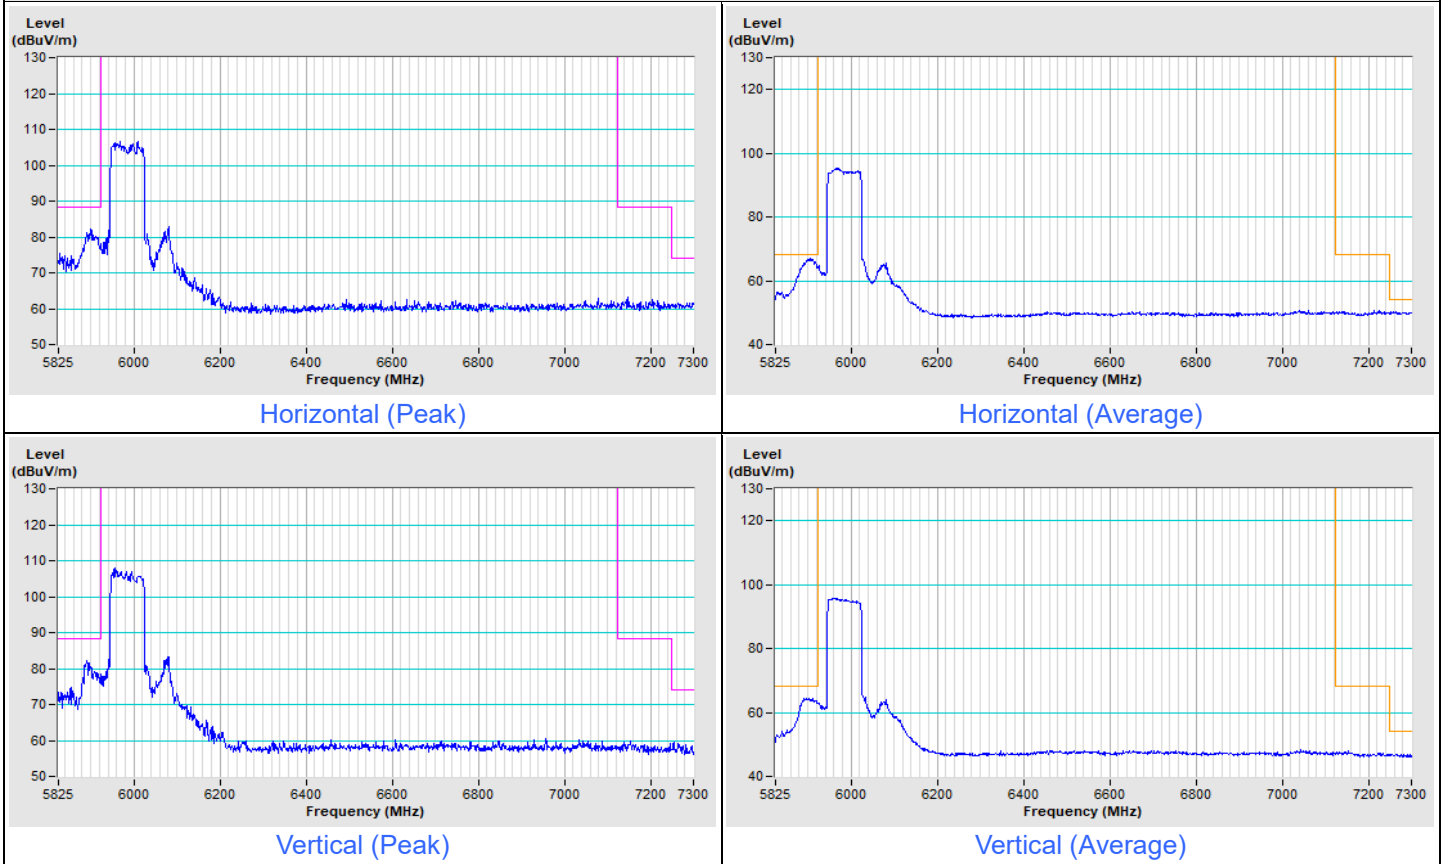

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 15

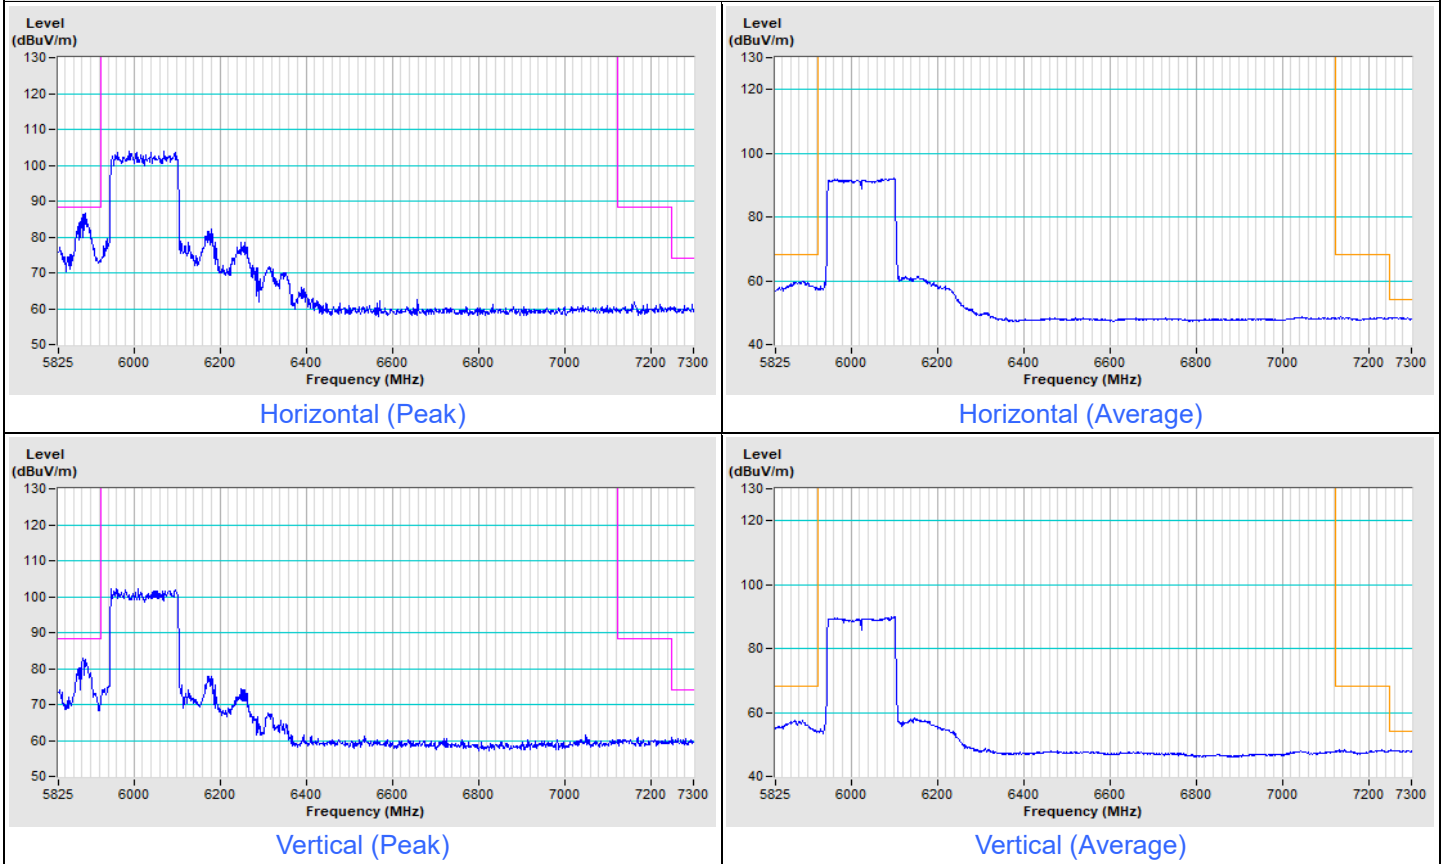


Plot of Band Edge


2TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 1

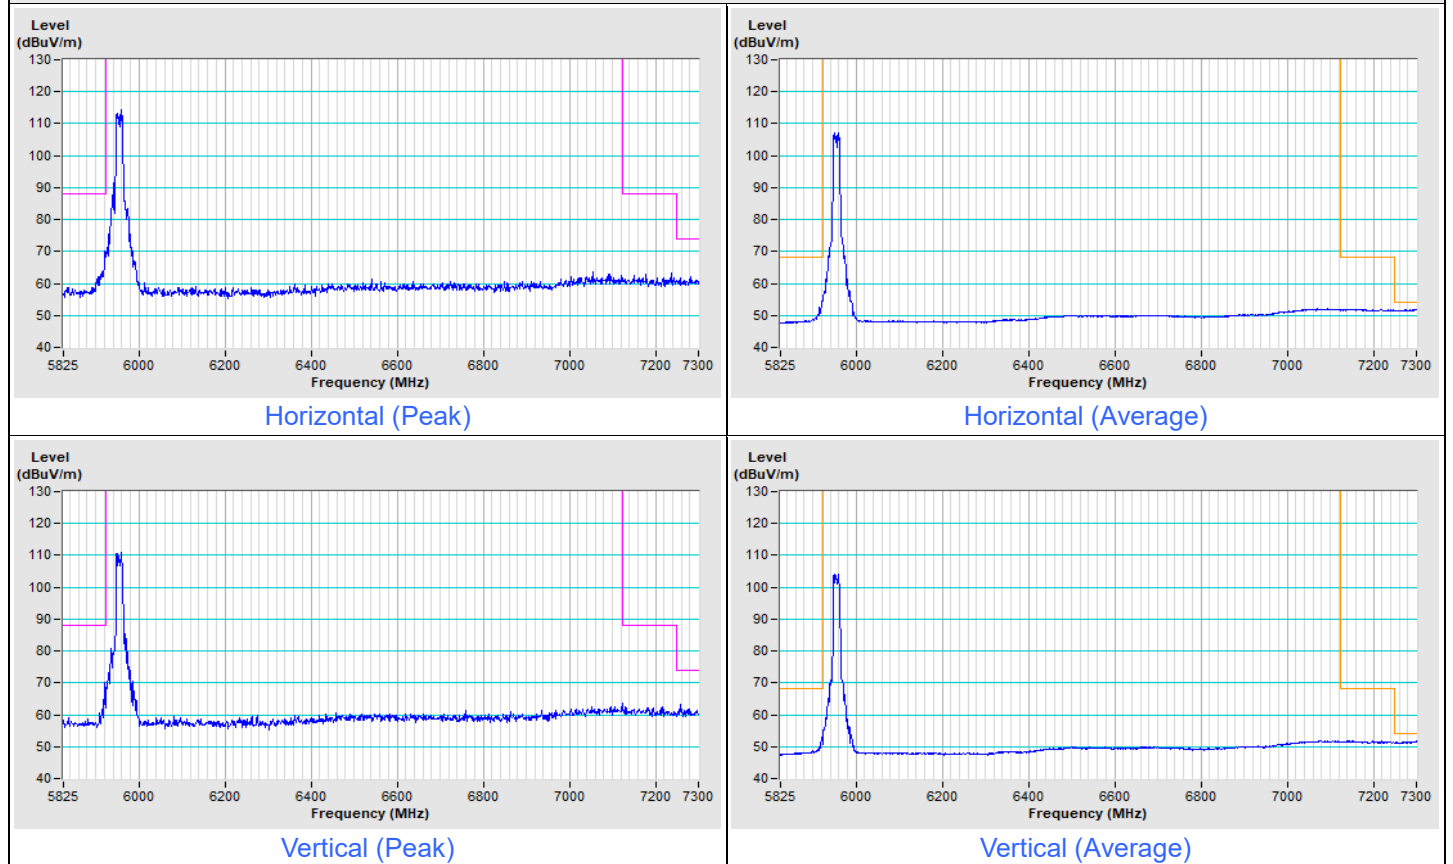


802.11be (EHT20) Channel 1

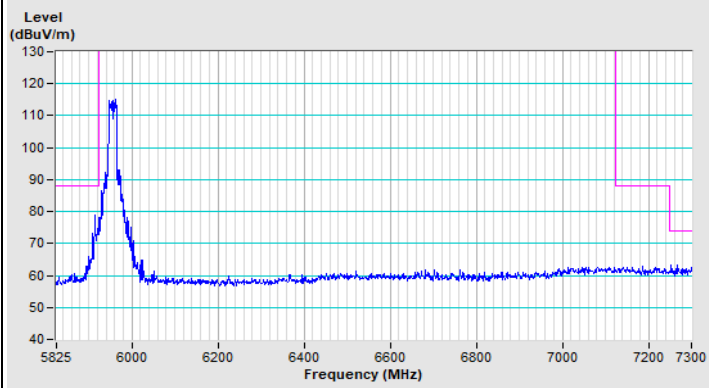


Horizontal (Peak)

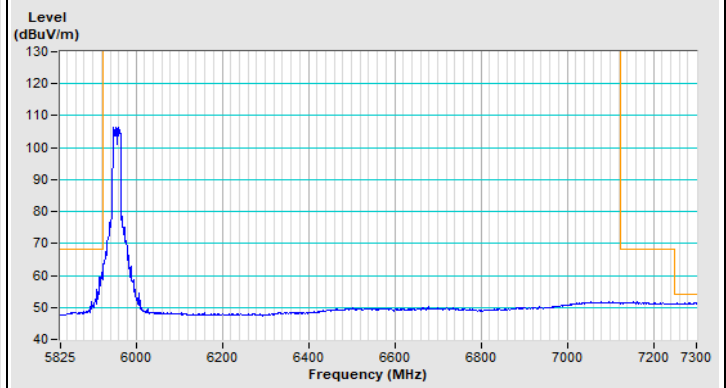

Horizontal (Average)

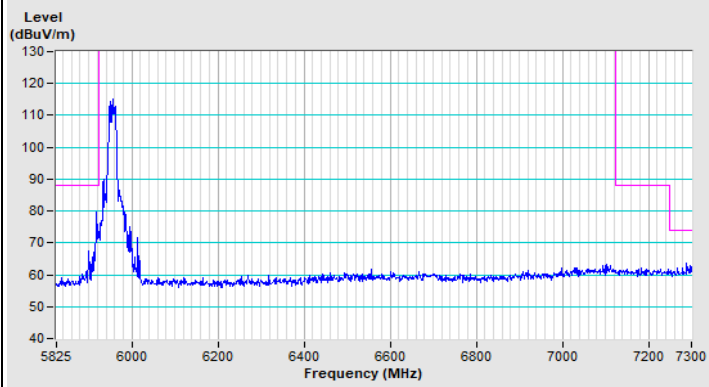


Vertical (Peak)

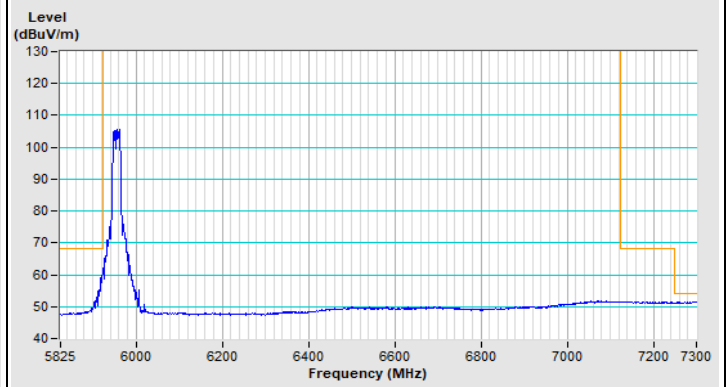

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 3

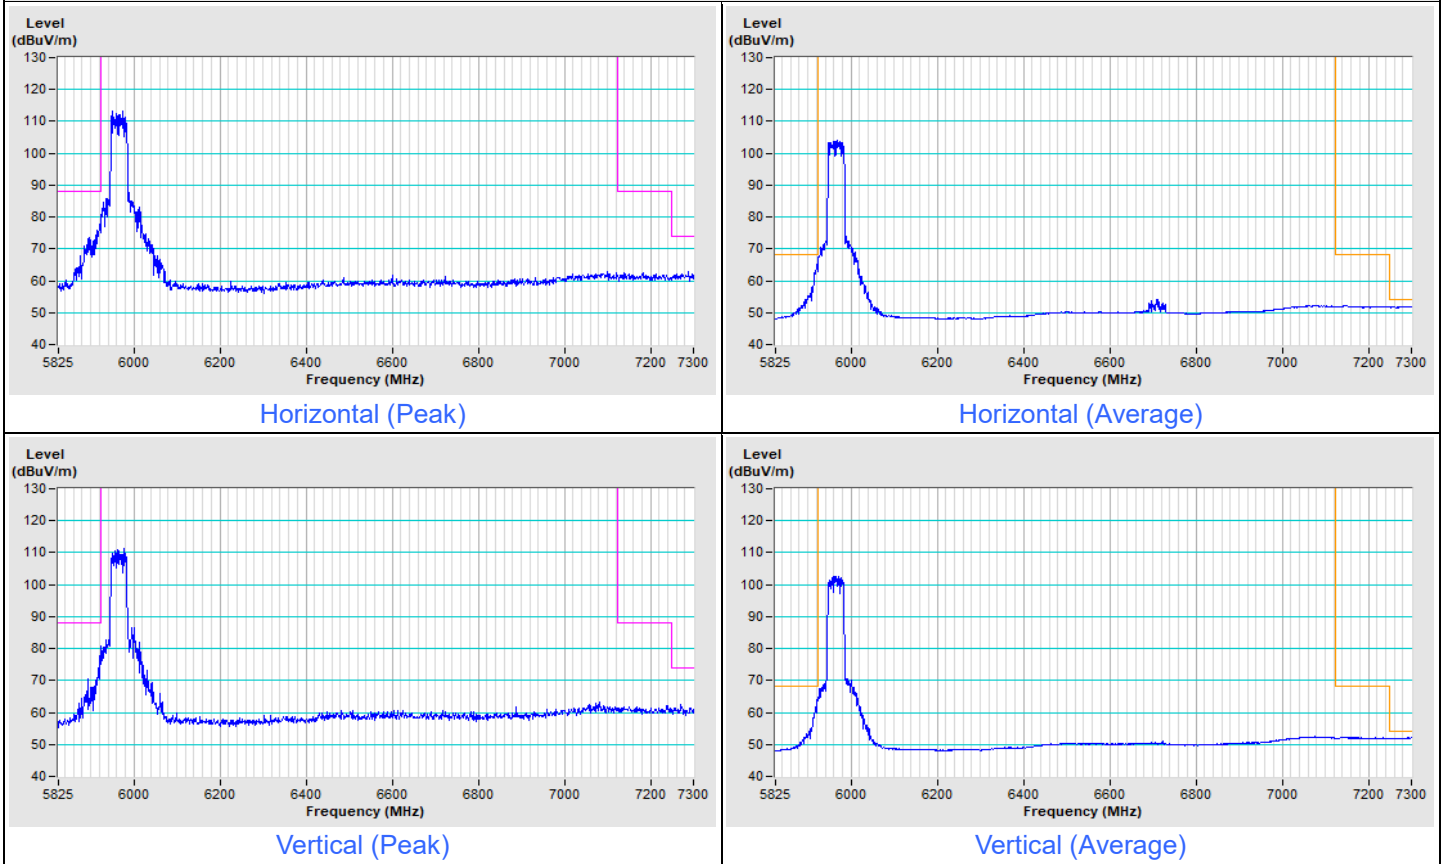


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 7

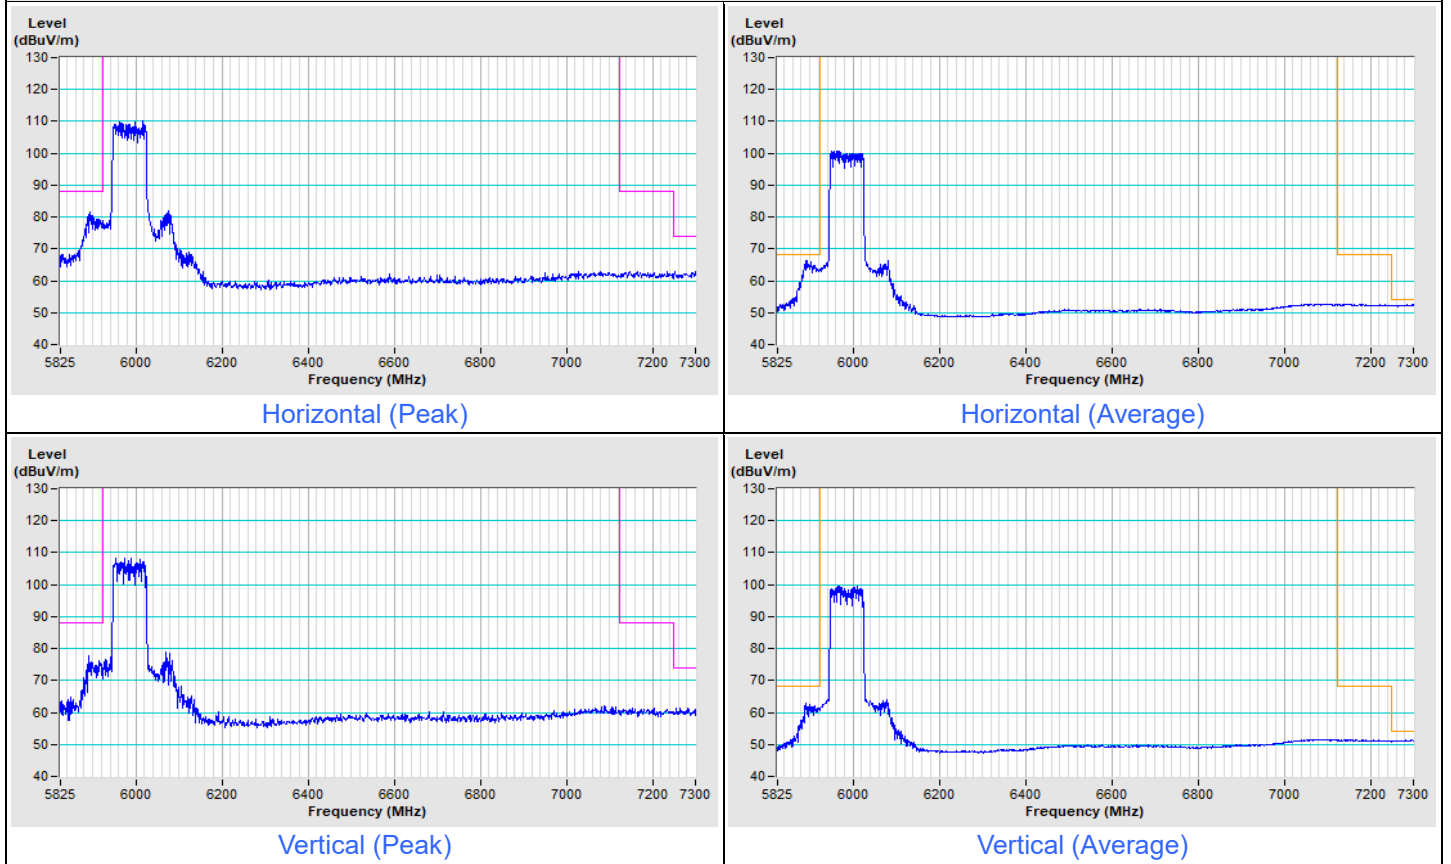


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 15

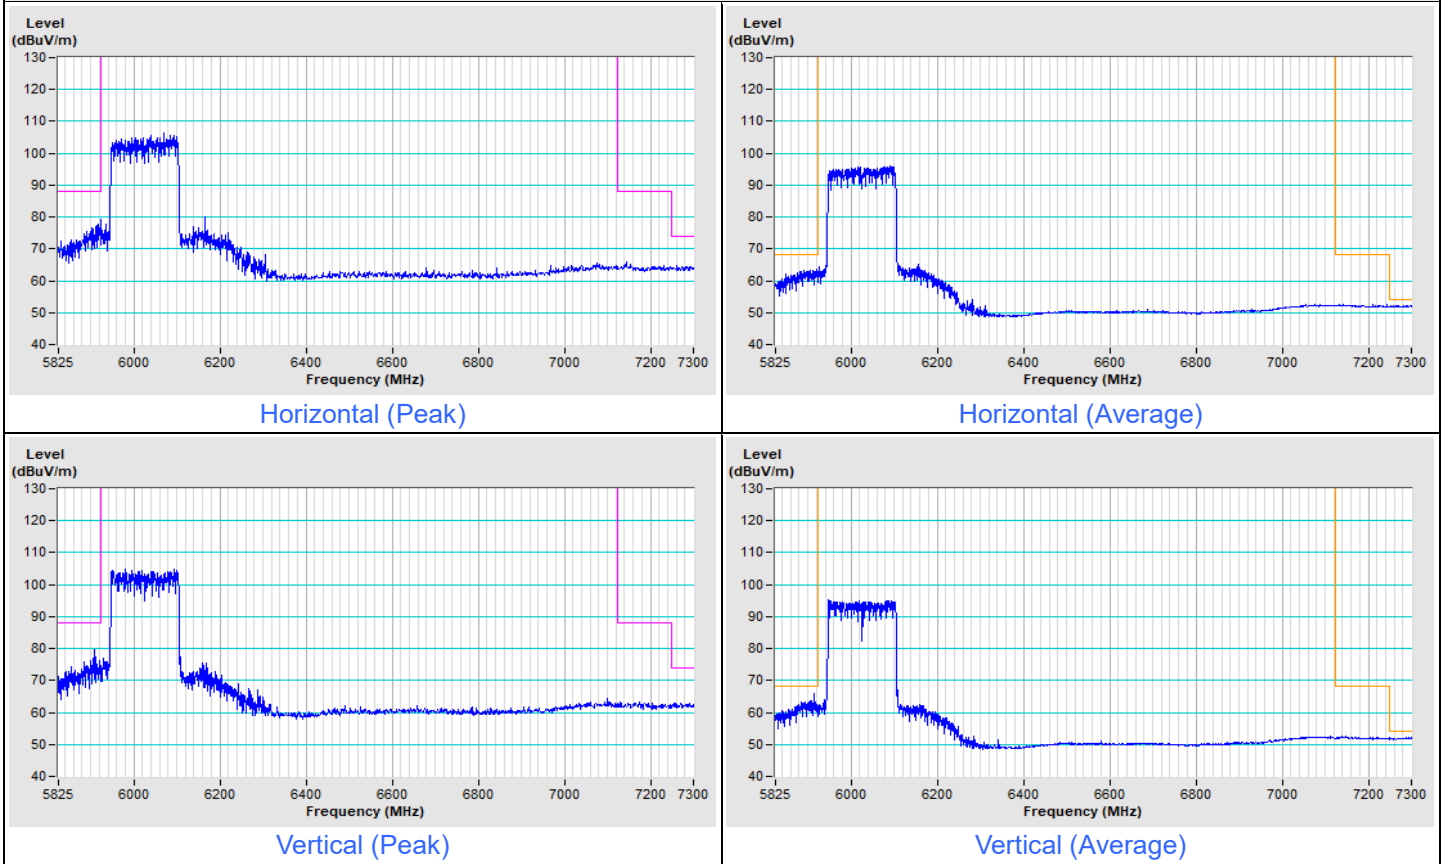


Plot of Band Edge
Partial RU_1TX


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

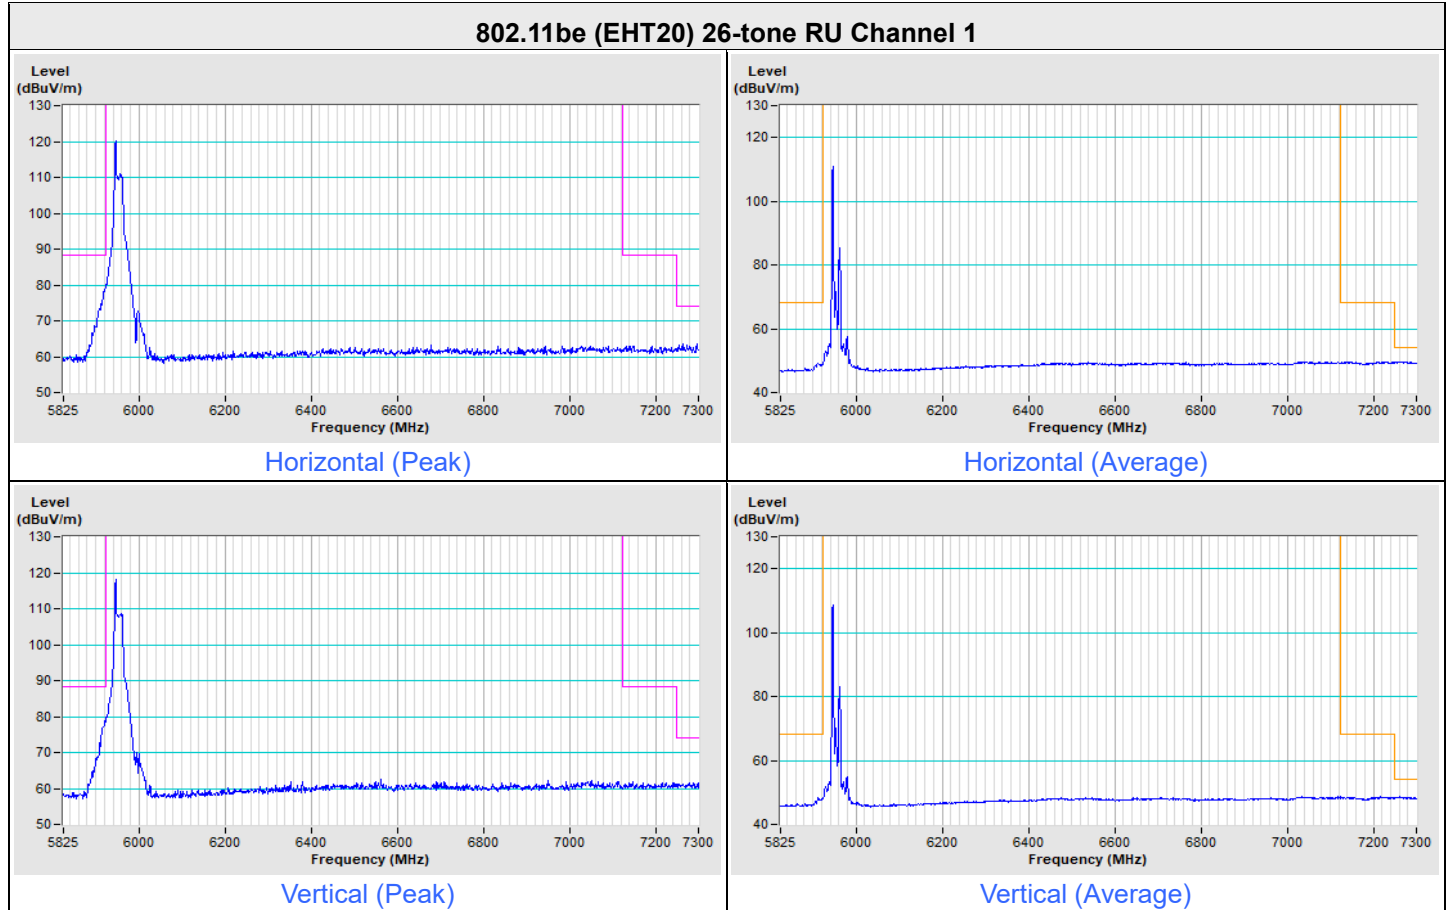


802.11be (EHT20) 52-tone RU Channel 1

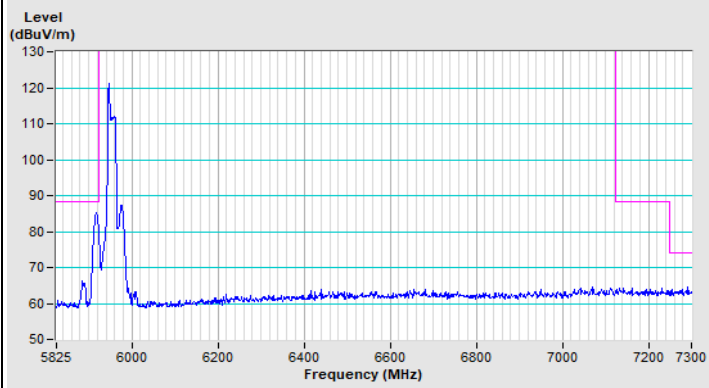


Horizontal (Peak)

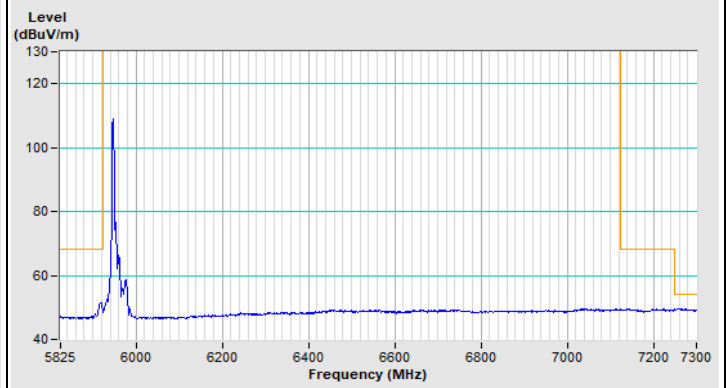

Horizontal (Average)

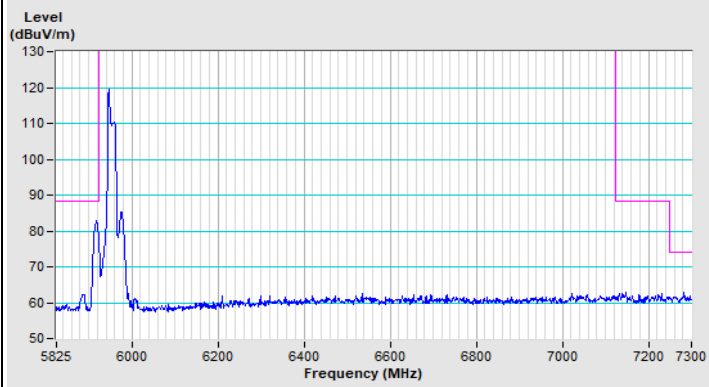


Vertical (Peak)

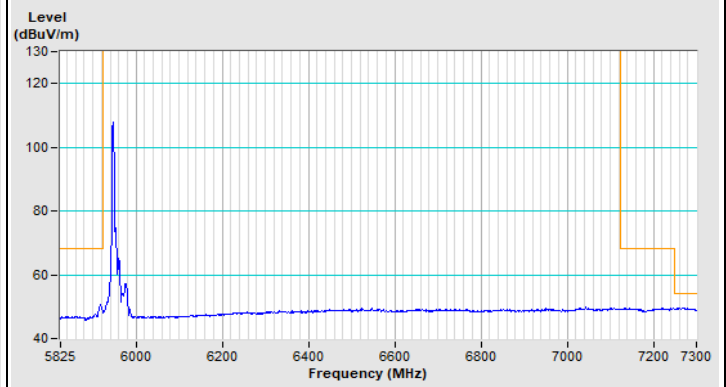


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 1

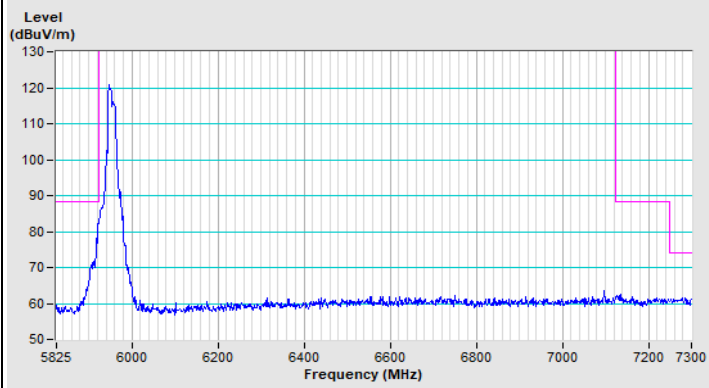


Horizontal (Peak)

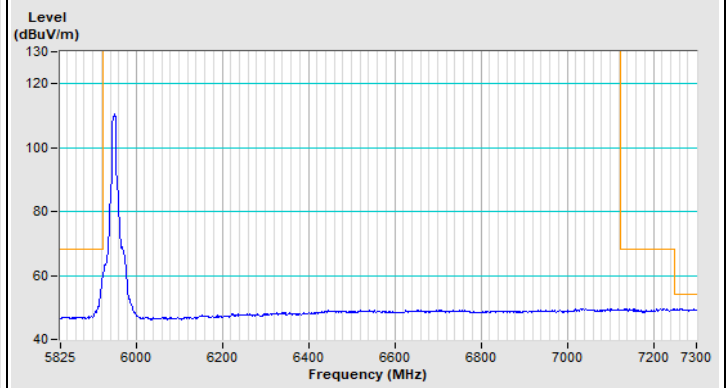

Horizontal (Average)

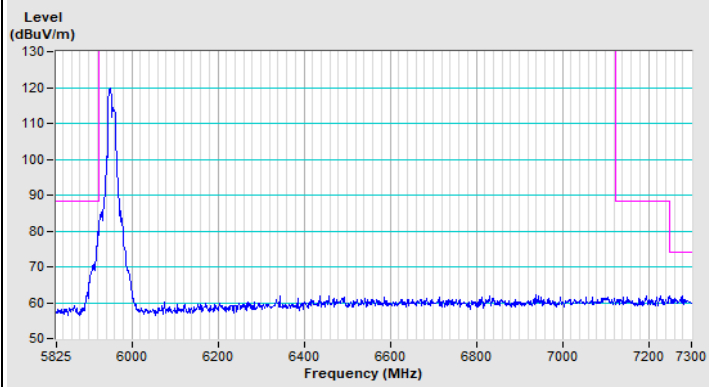


Vertical (Peak)

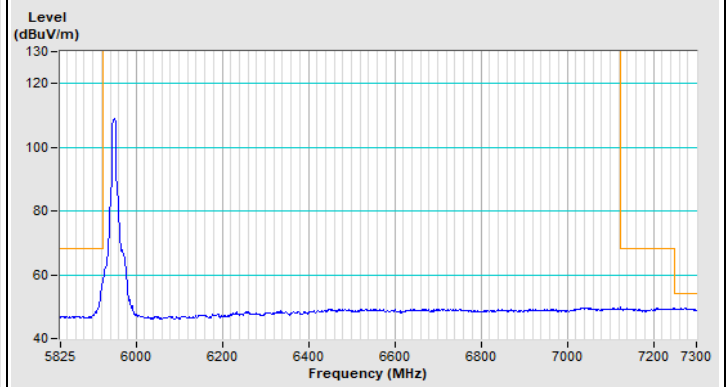


Vertical (Average)

Plot of Band Edge
Partial RU_2TX


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

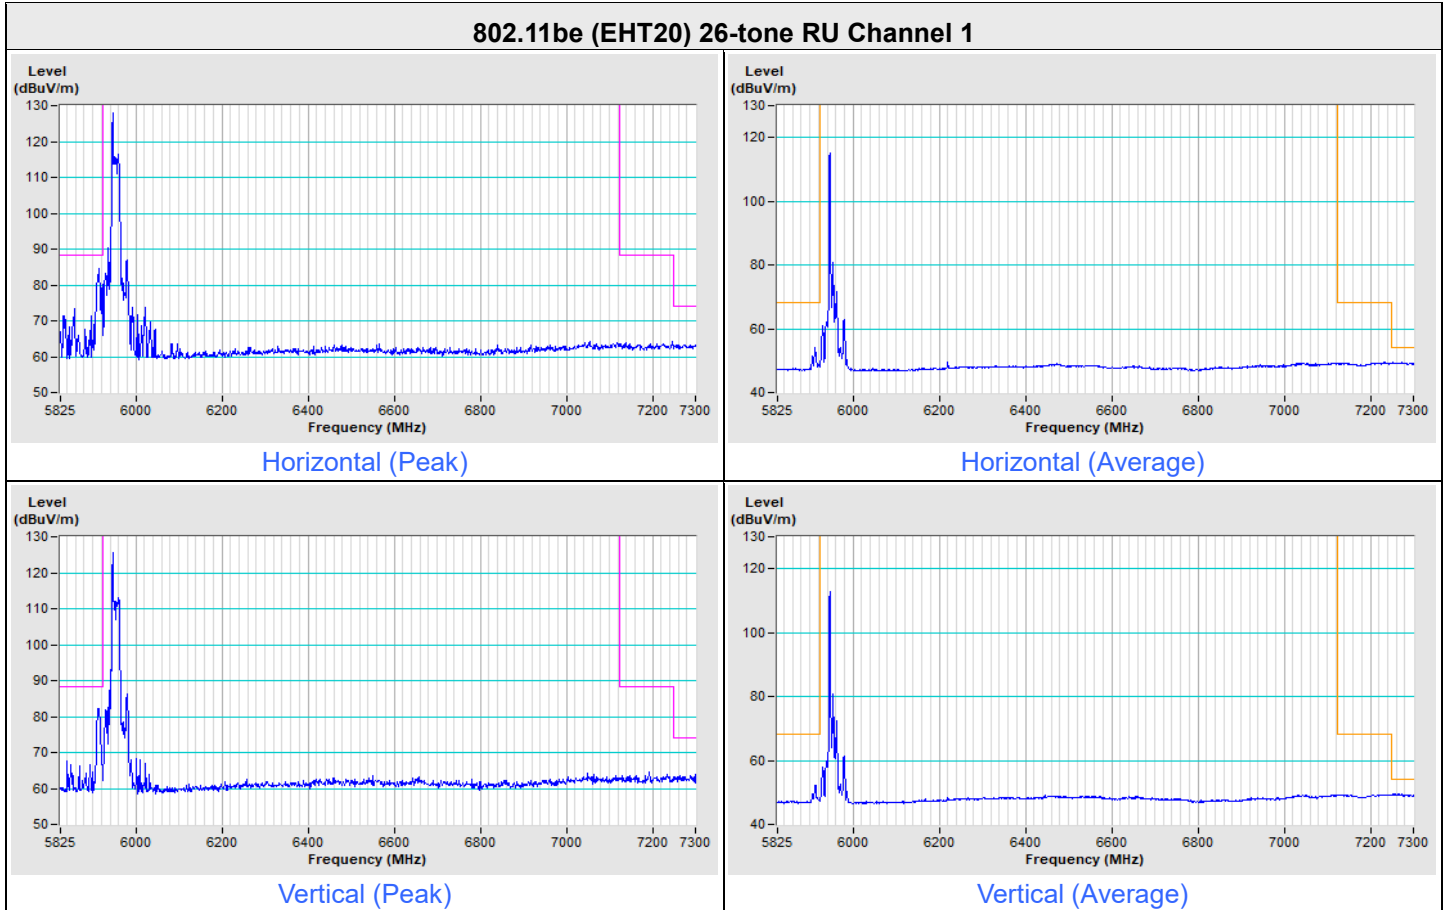


802.11be (EHT20) 52-tone RU Channel 1

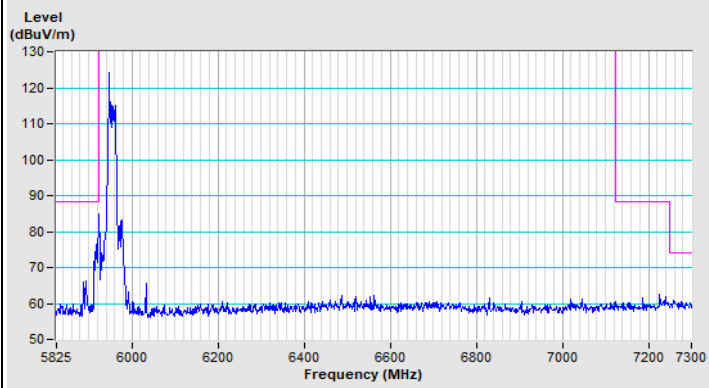


Horizontal (Peak)

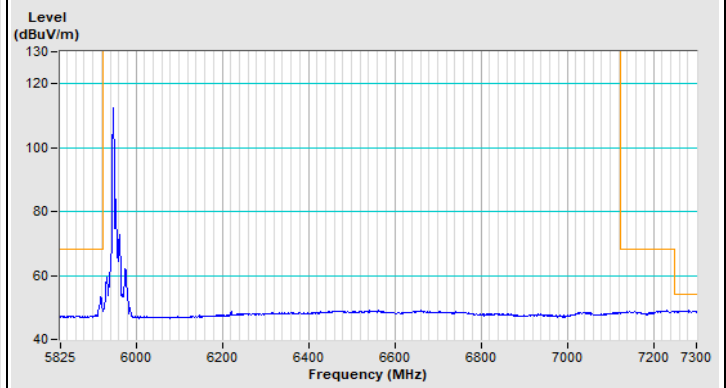

Horizontal (Average)

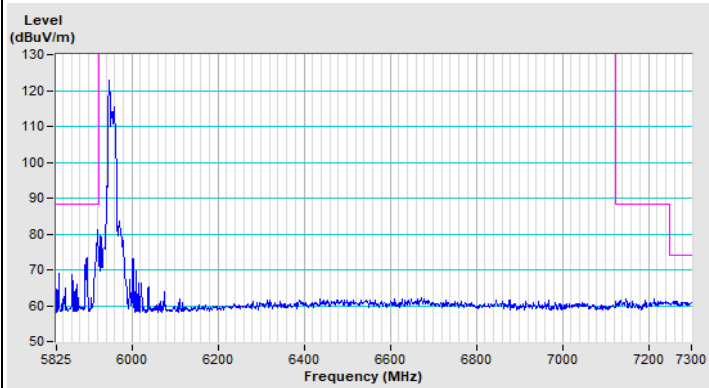


Vertical (Peak)

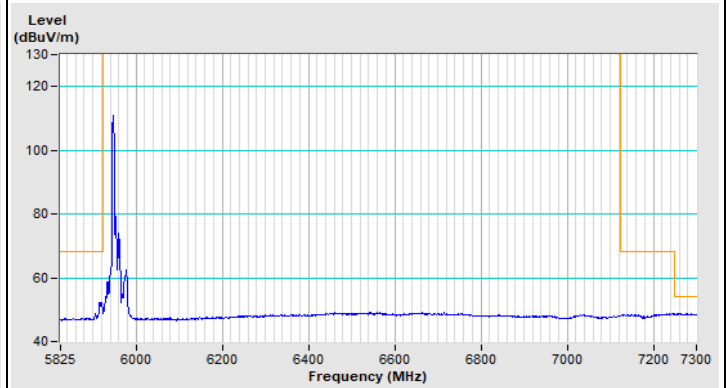


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 1

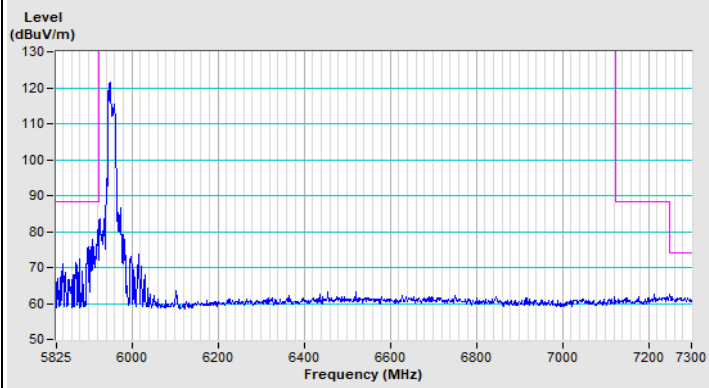


Horizontal (Peak)

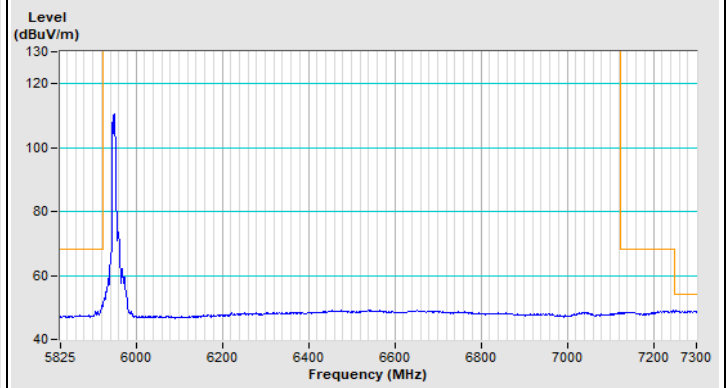

Horizontal (Average)

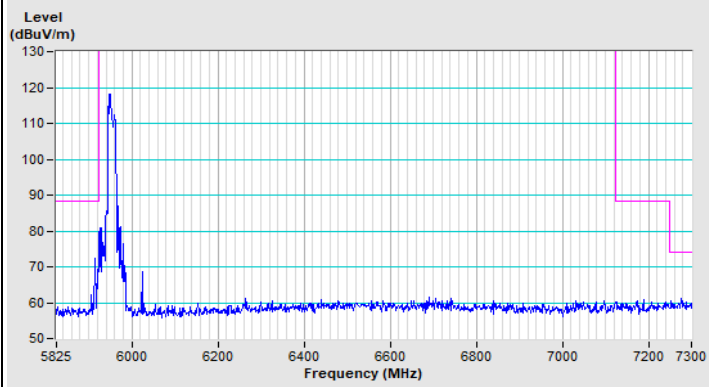

Vertical (Peak)

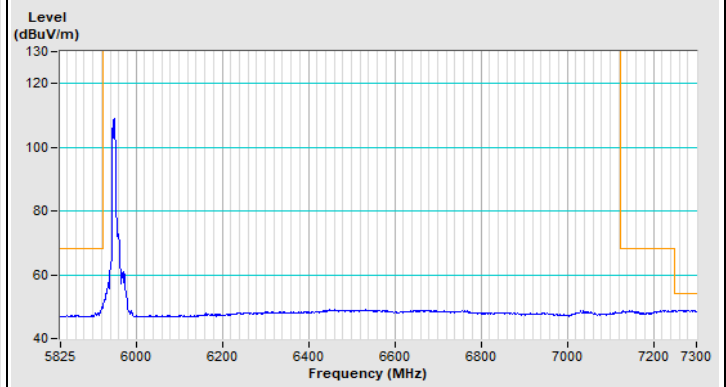

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---