



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Realtek Semiconductor Corp.
Applicant Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
FCC ID	TX2RTL8188CEB8
Manufacturer's company	Realtek Semiconductor Corp.
Manufacturer Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Product Name	802.11b/g/n RTL8188CE Combo miniCard
Brand Name	Realtek
Model Name	RTL8188CEB8
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jul. 23, 2010
Final Test Date	Sep. 29, 2010
Submission Type	Original Equipment

Statement

Test result included is only for the Bluetooth part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory
1190

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	6
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units	8
3.8. Table for Parameters of Test Software Setting	8
3.9. Test Configurations	10
4. TEST RESULT	14
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. Conducted Peak Output Power Measurement.....	24
4.3. Hopping Channel Separation Measurement	27
4.4. Number of Hopping Frequency Measurement.....	42
4.5. Dwell Time Measurement.....	47
4.6. Radiated Emissions Measurement	71
4.7. Band Edge Emissions Measurement	99
4.8. Antenna Requirements	110
5. LIST OF MEASURING EQUIPMENTS	111
6. TEST LOCATION.....	113
7. TAF CERTIFICATE OF ACCREDITATION	114
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A22
APPENDIX B. TEST PHOTOS.....	B1 ~ B14
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~ C3
APPENDIX D. CO-LOCATION REPORT	
APPENDIX E. ANTENNA LIST	



History of This Test Report

Original Issue Date: Oct. 05, 2010

Report No.: FR080215AB

- No additional attachment.
- Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11b/g/n RTL8188CE Combo miniCard
Brand Name : Realtek
Model Name : RTL8188CEB8
Applicant : Realtek Semiconductor Corp.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 23, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Jordan Hsiao 2010.10.12

Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	15.41 dB
4.2	15.247(b)(1)	Maximum Peak Conducted Output Power	Complies	9.31 dB
4.3	15.247(a)(1)	Hopping Channel Separation	Complies	-
4.4	15.247(b)(1)	Number of Hopping Frequency	Complies	-
4.5	15.247(a)(1)	Dwell Time	Complies	-
4.6	15.247(d)	Radiated Emissions	Complies	4.28 dB
4.7	15.247(d)	Band Edge Emissions	Complies	6.90 dB
4.8	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Hopping Channel Separation	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	From Host System
Modulation	FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rate (Mbps)	GFSK: 1 ; $\pi/4$ -QPSK: 2 ; 8DPSK: 3
Frequency Range	2400 ~ 2483.5MHz
Channel Number	79
Channel Band Width (99%)	1.2200 MHz
Conducted Output Power	11.69 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
A	Wan shih	TN1WFI0009A	Dipole Antenna	I-PEX	2.00	TX/RX
B	WNC	DQ661500301	PIFA Antenna	I-PEX	3.95	TX/RX
				I-PEX	3.90	TX/RX

Note:

1. There are 125 sets of antenna provided to this EUT, please refer to Appendix E for further information.

Connector 1 (Main): Ant. A / Ant. B

Connector 2 (Aux.): Ant. A / Ant. B

2. There are three types of EUT, and they would collocate with two types of antenna (Dipole and PIFA Antenna).

EUT 1 (Dual Port Diversity Transmitter):

EUT has two antenna ports, and it supports the antenna with WLAN and Bluetooth diversity function.

EUT 2 (Dual Port Fixed Path Transmitter):

EUT has two antenna ports, and the main antenna port supports Bluetooth function, and the auxiliary antenna port supports WLAN function.

EUT 3 (Single Port Diversity Transmitter):

EUT has one antenna port, and users could switch WLAN or Bluetooth function by themselves.

3. TX / RX Function:

<For EUT 1 >:

For IEEE 802.11n mode (1TX/1RX):

Ant. A and Ant. B can be used as transmitting or receiving antenna.

For IEEE 802.11b/g mode (1TX/1RX):

Ant. A and Ant. B can be used as transmitting or receiving antenna.

The EUT supports the antenna with TX/RX diversity function. Due to the "Connector 1" generated higher output power than "Connector 2", all the tests were base on this setting and recorded in this report.

<For EUT 2 & EUT 3>:

For IEEE 802.11n mode (1TX/1RX):

Ant. A or Ant. B can be used as transmitting/ receiving antenna.


For IEEE 802.11b/g mode (1TX/1RX):

Ant. A or Ant. B can be used as transmitting/ receiving antenna.

<For EUT 1 (Dual Port Diversity Transmitter) & EUT 2 (Dual Port Fixed Path Transmitter)>:


Connector 1(Main): TX/RX

Connector 2(Aux): TX/RX

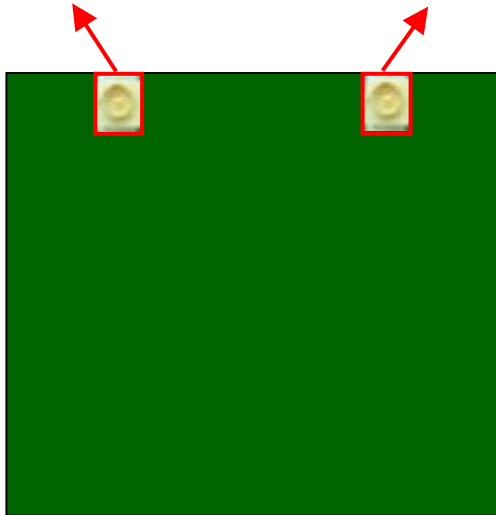

<For EUT 3 (Single Port Diversity Transmitter)>:

Connector 1: TX/RX

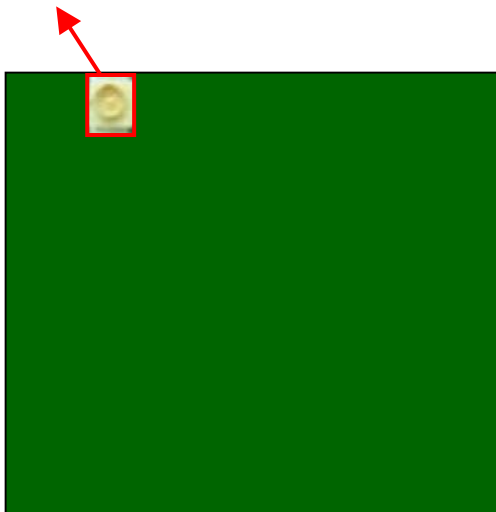

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	40	2442 MHz
	1	2403 MHz	:	:
	:	:	77	2479 MHz
	38	2440 MHz	78	2480 MHz
	39	2441 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emissions	Normal Link	-	-	-
Max. Conducted Output Power	8DPSK	3 Mbps	0/39/78	NA
Hopping Channel Separation	8DPSK	3 Mbps	0~1/39~40/77~78	NA
Number of Hopping Frequency	8DPSK	3 Mbps	0~78	NA
Dwell Time	3DH1/3DH3/3DH5	3 Mbps	0/39/78	NA
Radiated Emissions Below 1GHz	8DPSK	3 Mbps	39	A, B
Radiated Emissions Above 1GHz	8DPSK	3 Mbps	0/39/78	A, B
Band Edge Emissions	8DPSK	3 Mbps	0/78	A, B

Note:

1. There are three types of EUT, and they would collocate with two types of antenna (Dipole and PIFA Antenna).
2. The EUT could be divided into main source and second source.
3. There are two shielded case types of EUT.
(One piece splicing by soldering and assembly by soldering frame and cover.)

EUT 1 (Dual Port Diversity Transmitter-DPDT Type):

EUT has two antenna ports, and it supports the antenna with WLAN and Bluetooth diversity function.

EUT 2 (Dual Port Fixed Path Transmitter-Fixed Type):

EUT has two antenna ports, and the main antenna port supports Bluetooth function, and the auxiliary antenna port supports WLAN function.

EUT 3 (Single Port Diversity Transmitter-SPDT Type):

EUT has one antenna port, and users could switch WLAN or Bluetooth function by themselves,

All the test modes were listed as below.

<For Main Source>:

After testing, EUT 2 with assembly by soldering frame has been evaluated to be the worst case, thus it performed all measurement in this report, EUT 1 and EUT 3 with assembly by soldering frame only performed middle channel (each modulation).

Test Mode 1: EUT 2 (Main Source) + assembly by soldering frame and cover (shielded case type)
+ Dipole Antenna (Full Test)

Test Mode 2: EUT 2 (Main Source) + assembly by soldering frame and cover (shielded case type)
+ PIFA Antenna (Full Test)

Test Mode 3: EUT 1 (Main Source) + assembly by soldering frame and cover (shielded case type)
+ Dipole Antenna (Middle Channel Only)

Test Mode 4: EUT 1 (Main Source) + assembly by soldering frame and cover (shielded case type)
+ PIFA Antenna (Middle Channel Only)

Test Mode 5: EUT 3 (Main Source) + assembly by soldering frame and cover (shielded case type)
+ Dipole Antenna (Middle Channel Only)

Test Mode 6: EUT 3 (Main Source) + assembly by soldering frame and cover (shielded case type)
+ PIFA Antenna (Middle Channel Only)

<For Second Source>:

Due to EUT 2 with assembly by soldering frame has been evaluated to be the worst case for EUT main source, thus the test configuration would be performed for EUT second source.

Test Mode 1: EUT 2 (Second Source) + assembly by soldering frame and cover (shielded case type)
+ Dipole Antenna (Full Test)

Test Mode 2: EUT 2 (Second Source) + assembly by soldering frame and cover (shielded case type)
+ PIFA Antenna (Full Test)

<For Conducted Emissions Test, Radiated Emissions Test Below 1GHz and Other Tests>:

After testing, EUT 2 with assembly by soldering frame has been evaluated to be the worst case, thus measurement under conducted emissions test, radiated Emissions test below 1GHz and other tests will follow this same test configuration.

<For Main Source>:

Test Mode 1: EUT 2 (Main Source) + assembly by soldering frame and cover + Dipole Antenna

Test Mode 2: EUT 2 (Main Source) + assembly by soldering frame and cover + PIFA Antenna

<For Second Source>:

Test Mode 1: EUT 2 (Second Source) + assembly by soldering frame and cover + Dipole Antenna

Test Mode 2: EUT 2 (Second Source) + assembly by soldering frame and cover + PIFA Antenna

<For MPE and Co-location Test>:

The EUT could be applied with Bluetooth and wireless LAN function; therefore Maximum Permissible Exposure (please refer to Appendix C) and Co-location (please refer to Appendix D) tests are added for simultaneously transmit between Bluetooth and wireless LAN function.

Test Mode 1: EUT 2 (Main Source) + Wireless LAN function + Bluetooth function

Test Mode 2: EUT 2 (Second Source) + Wireless LAN function + Bluetooth function

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	879474	IC 4086	-
CO04-HY	Conduction	Hwa Ya	879474	IC 4086	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Mouse	First Price	FP-M02	DoC
Modem	ACEEX	DM1414	IFAXDM1414
Wireless AP	Planex	GW-AP54SGX	N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Main Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Power Parameters of Bluetooth

Test Software Version	Bluetest		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	105	105	105

<For Main Source - EUT 2 (Mode 2 with PIFA Antenna)>:

Test Software Version	Bluetest		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	105	105	105

<For Second Source - EUT 2 (Mode 1 with Dipole Antenna)>:

Test Software Version	Bluetest		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	105	105	105

<For Second Source - EUT 2 (Mode 2 with PIFA Antenna)>:

Test Software Version	Bluetest		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	105	105	105

During the test, "Bluetest" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.


3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration


<For Bluetooth Function>:

Test Configuration: 9KHz~1GHz

<For Main Source, Second Source– EUT 2 (Mode 1 with Dipole Antenna)>

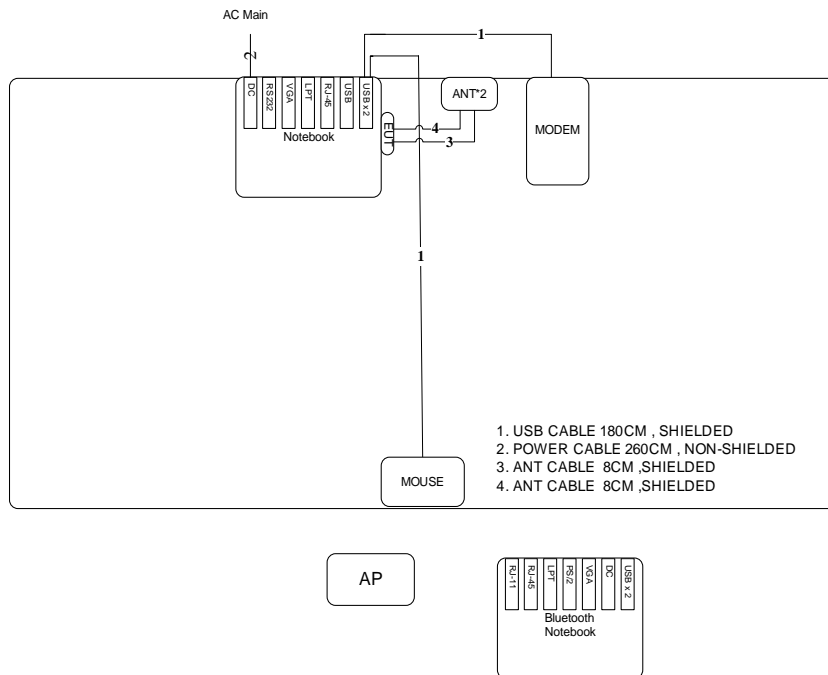


<For Main Source, Second Source– EUT 2 (Mode 2 with PIFA Antenna)>:

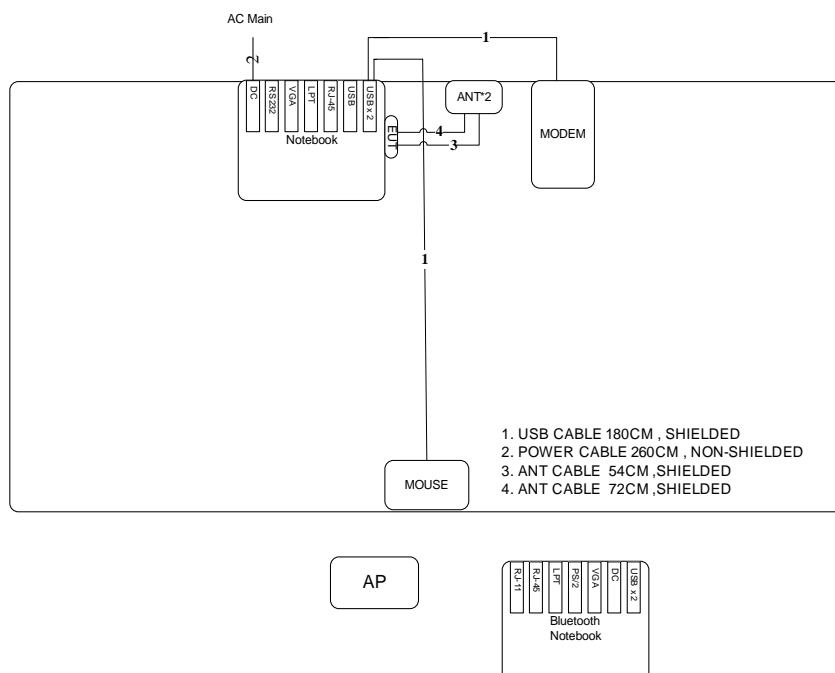


<For Bluetooth Function>:

Test Configuration: above 1GHz

<For Main Source, Second Source– EUT 2 (Mode 1 with Dipole Antenna)>

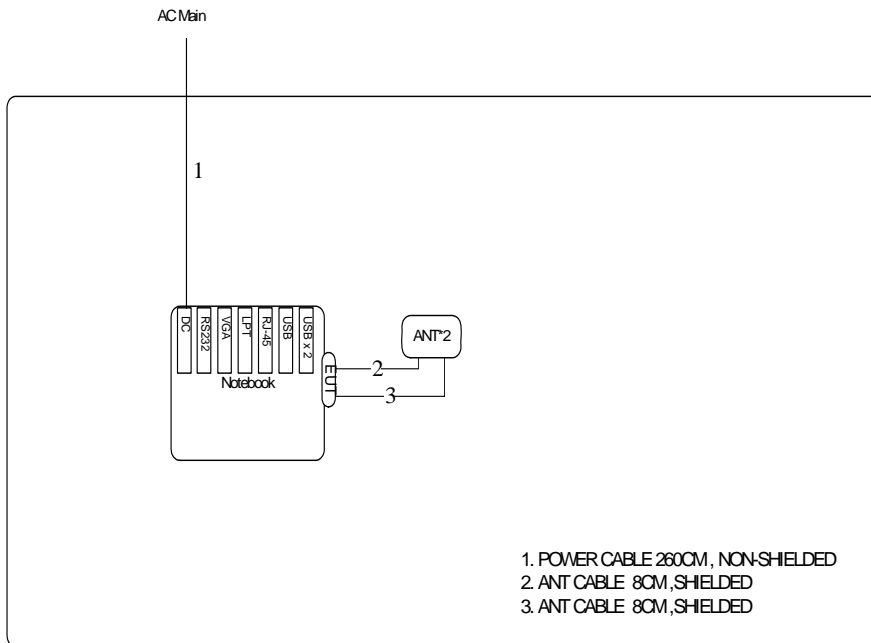


<For Main Source, Second Source– EUT 2 (Mode 2 with PIFA Antenna)>

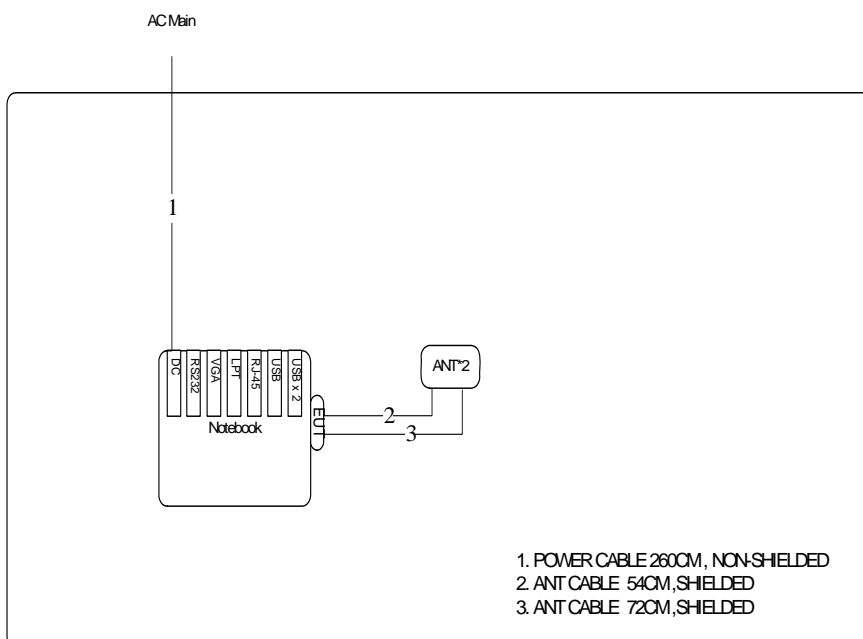


<For Co-location>:

<For Main Source, Second Source– EUT 2 (Mode 1 with Dipole Antenna)>

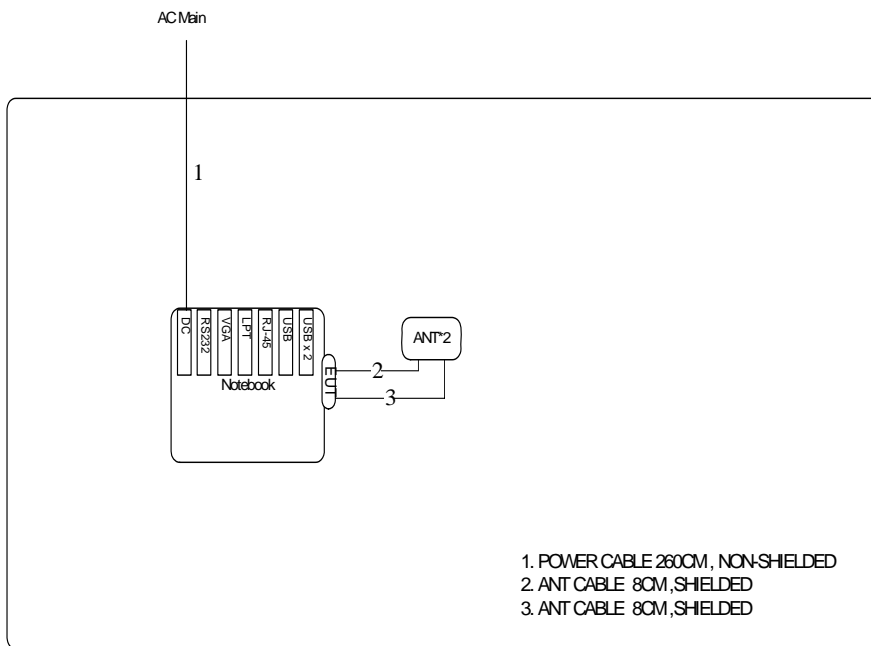


<For Main Source, Second Source– EUT 2 (Mode 2 with PIFA Antenna)>

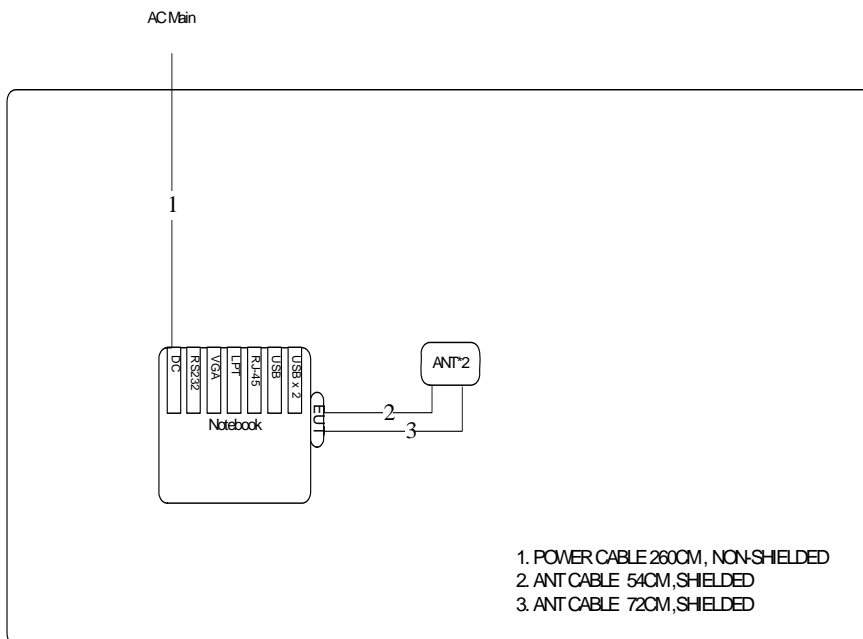


3.9.2. AC Power Line Conduction Emissions Test Configuration

<For Main Source, Second Source– EUT 2 (Mode 1 with Dipole Antenna)>:

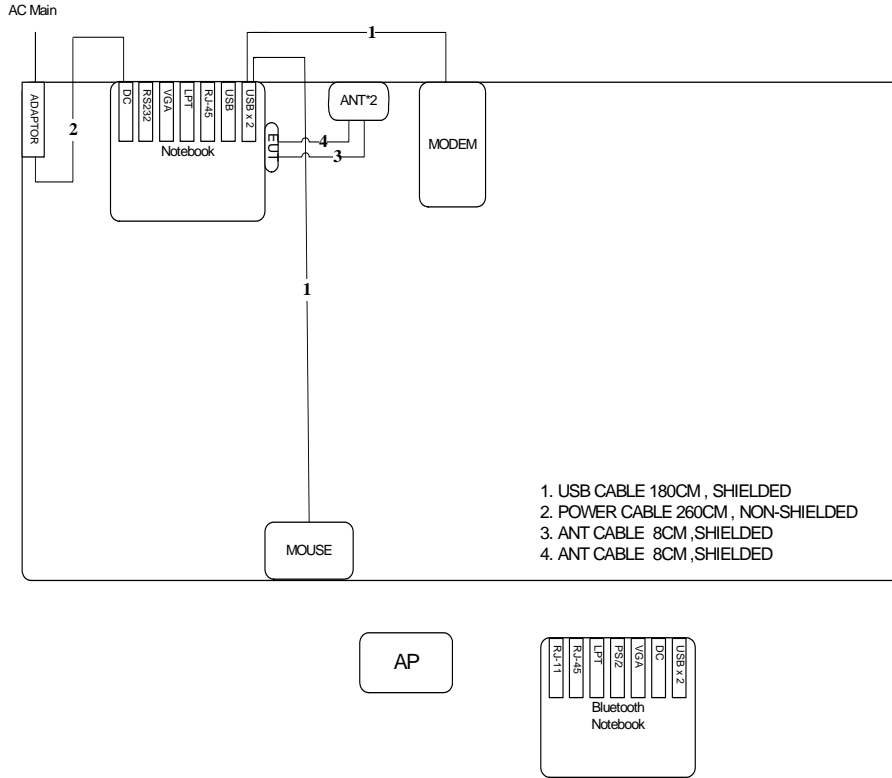

<For Main Source, Second Source– EUT 2 (Mode 2 with PIFA Antenna)>:

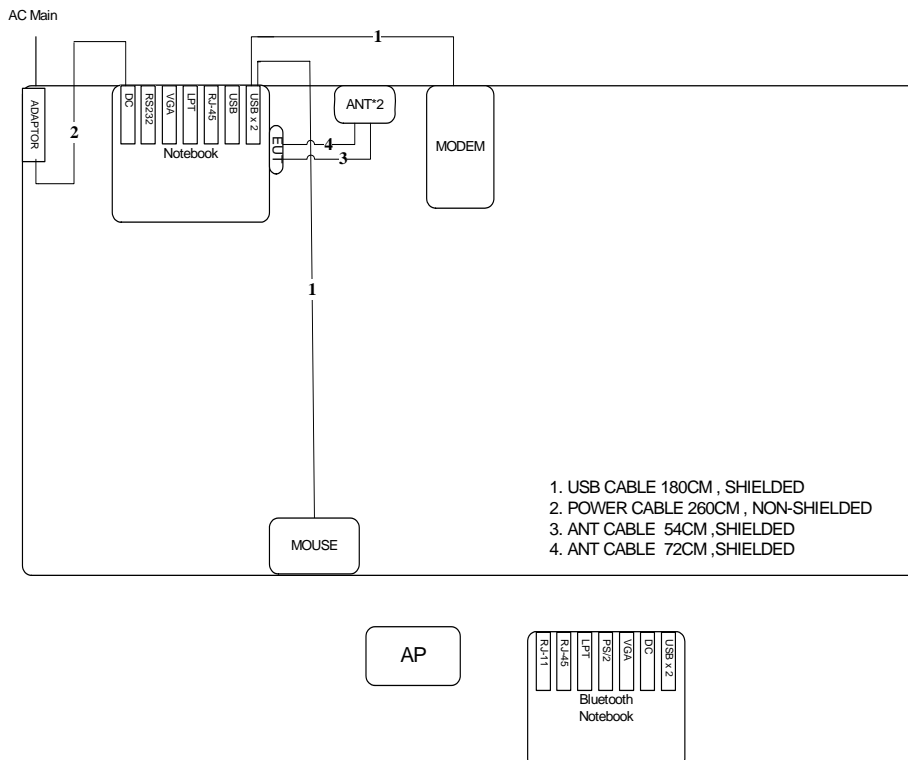

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

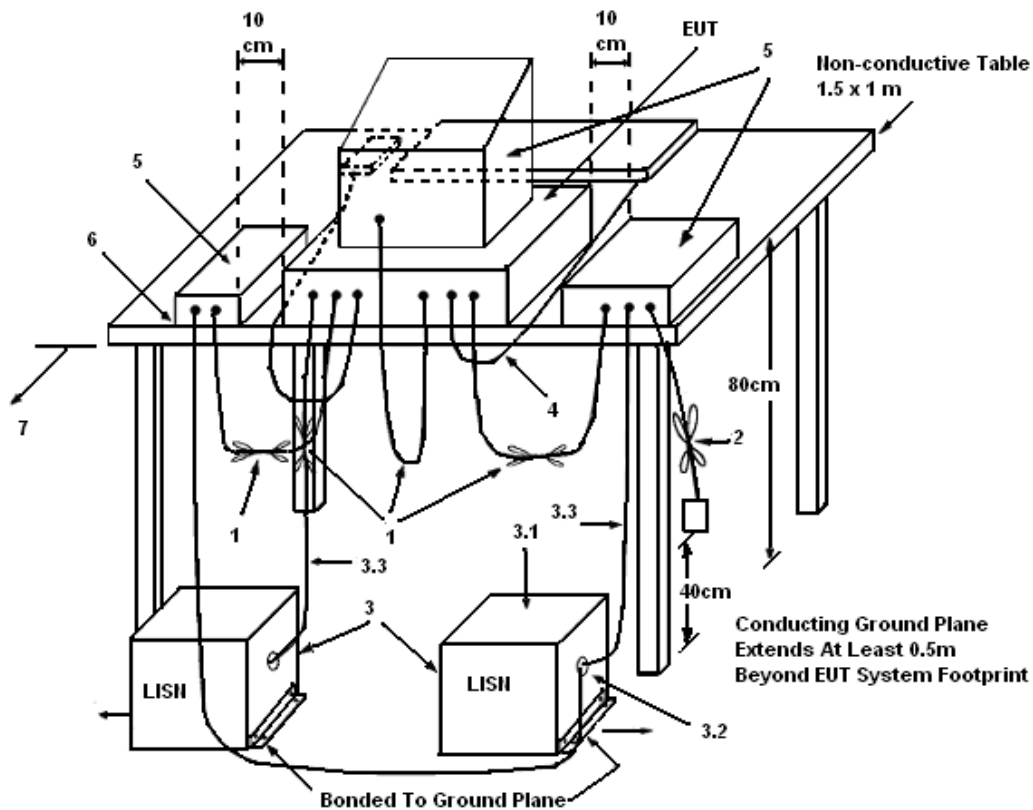

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


<For Main Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	23°C	Humidity	54%
Test Engineer	Sin Chang	Phase	Line
Configuration	Normal Link		

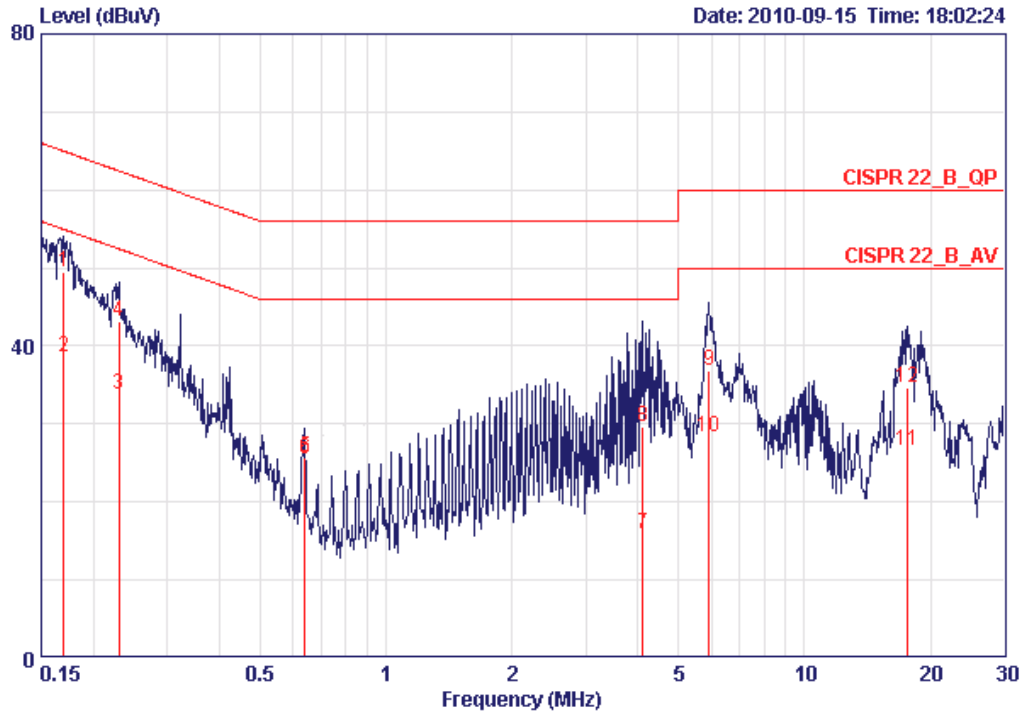

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16944	49.40	-15.58	64.99	49.14	0.06	0.20	QP
2	0.16944	38.62	-16.36	54.99	38.36	0.06	0.20	AVERAGE
3	0.23040	33.84	-18.60	52.44	33.59	0.05	0.20	AVERAGE
4	0.23040	43.14	-19.30	62.44	42.89	0.05	0.20	QP
5	0.64058	25.65	-20.35	46.00	25.42	0.03	0.20	AVERAGE
6	0.64058	25.53	-30.47	56.00	25.30	0.03	0.20	QP
7	4.114	15.91	-30.09	46.00	15.50	0.11	0.30	AVERAGE
8	4.114	29.56	-26.44	56.00	29.15	0.11	0.30	QP
9	5.929	36.81	-23.19	60.00	36.30	0.21	0.30	QP
10	5.929	28.32	-21.68	50.00	27.81	0.21	0.30	AVERAGE
11	17.568	26.52	-23.48	50.00	25.32	0.70	0.50	AVERAGE
12	17.568	34.69	-25.31	60.00	33.49	0.70	0.50	QP

Temperature	23°C	Humidity	54%
Test Engineer	Sin Chang	Phase	Neutral
Configuration	Normal Link		

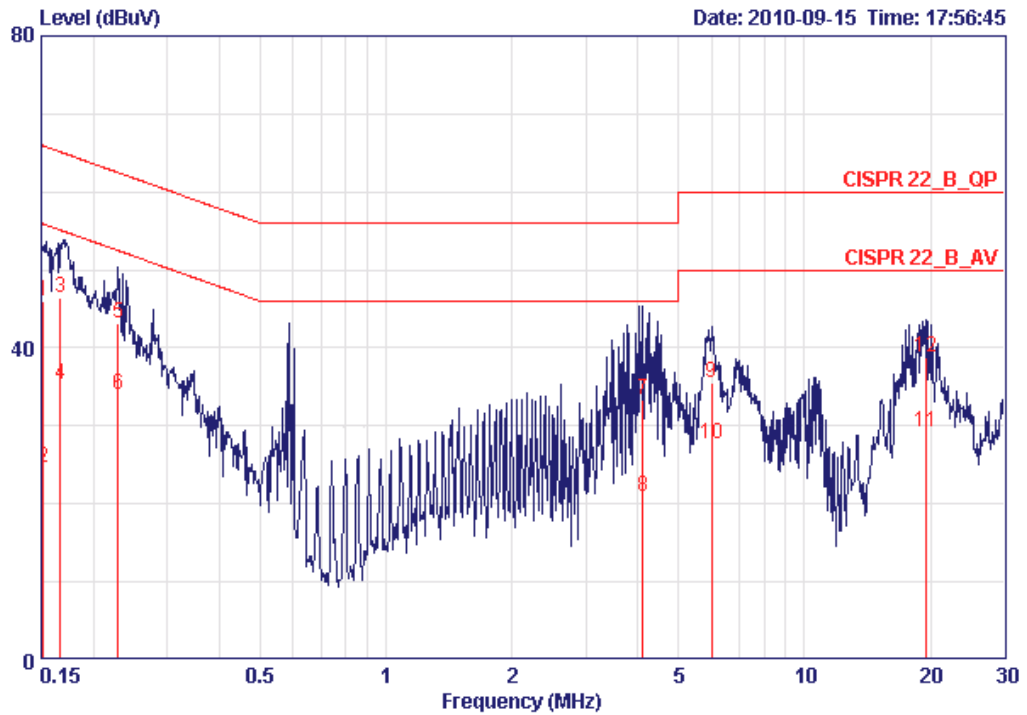


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15160	46.01	-19.90	65.91	45.71	0.10	0.20	QP
2	0.15160	24.60	-31.31	55.91	24.30	0.10	0.20	AVERAGE
3	0.16677	46.45	-18.67	65.12	46.15	0.10	0.20	QP
4	0.16677	35.40	-19.72	55.12	35.10	0.10	0.20	AVERAGE
5	0.22918	43.23	-19.25	62.48	42.95	0.08	0.20	QP
6	0.22918	34.04	-18.44	52.48	33.76	0.08	0.20	AVERAGE
7	4.114	33.26	-22.74	56.00	32.81	0.15	0.30	QP
8	4.114	20.89	-25.11	46.00	20.44	0.15	0.30	AVERAGE
9	5.993	35.61	-24.39	60.00	35.06	0.25	0.30	QP
10	5.993	27.61	-22.39	50.00	27.06	0.25	0.30	AVERAGE
11	19.532	29.11	-20.89	50.00	27.83	0.78	0.50	AVERAGE
12	19.532	38.79	-21.21	60.00	37.51	0.78	0.50	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.


<For Main Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Temperature	23°C	Humidity	54%
Test Engineer	Sin Chang	Phase	Line
Configuration	Normal Link		

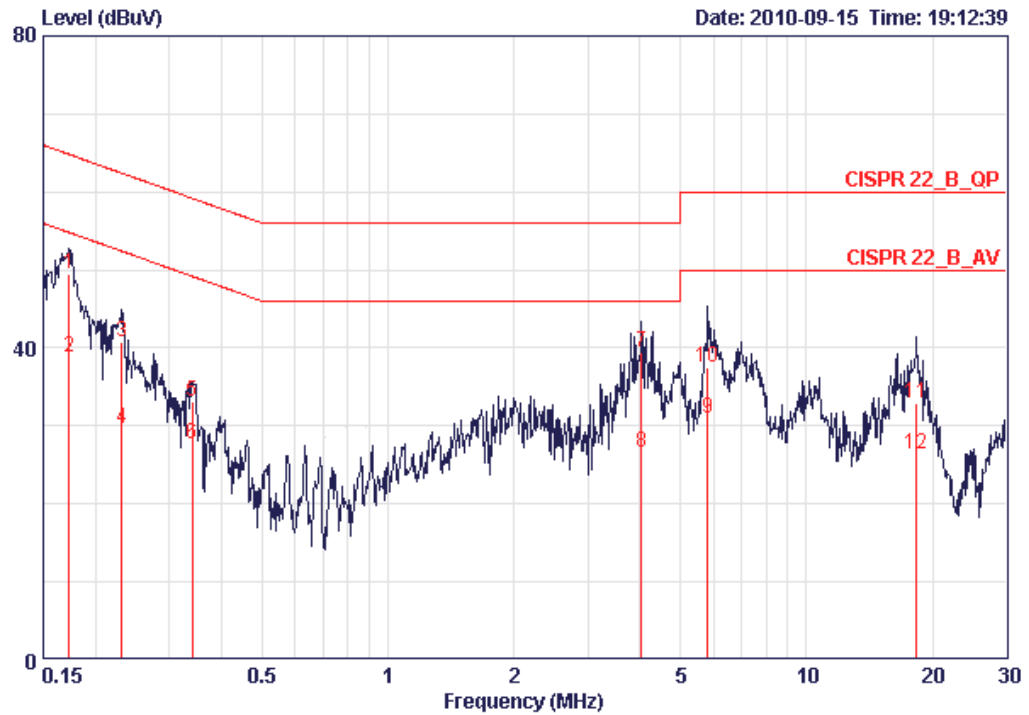

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.17307	49.40	-15.41	64.81	49.14	0.06	0.20	QP
2	0.17307	38.73	-16.08	54.81	38.47	0.06	0.20	AVERAGE
3	0.23162	40.74	-21.66	62.39	40.49	0.05	0.20	QP
4	0.23162	29.74	-22.66	52.39	29.49	0.05	0.20	AVERAGE
5	0.34100	33.11	-26.06	59.18	32.88	0.03	0.20	QP
6	0.34100	27.65	-21.52	49.18	27.42	0.03	0.20	AVERAGE
7	4.027	39.56	-16.44	56.00	39.16	0.10	0.30	QP
8	4.027	26.55	-19.45	46.00	26.15	0.10	0.30	AVERAGE
9	5.805	30.91	-19.09	50.00	30.41	0.20	0.30	AVERAGE
10	5.805	37.52	-22.48	60.00	37.02	0.20	0.30	QP
11	18.328	32.84	-27.16	60.00	31.60	0.74	0.50	QP
12	18.328	26.40	-23.60	50.00	25.16	0.74	0.50	AVERAGE

Temperature	23°C	Humidity	54%
Test Engineer	Sin Chang	Phase	Neutral
Configuration	Normal Link		

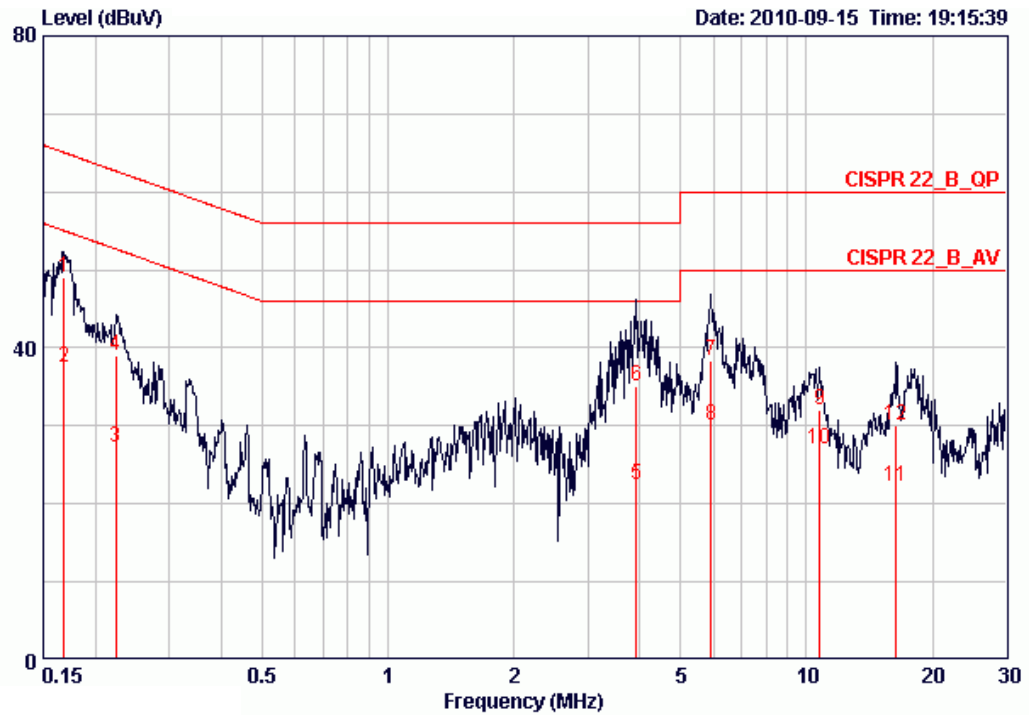


	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16854	49.09	-15.94	65.03	48.80	0.09	0.20	QP
2	0.16854	37.56	-17.47	55.03	37.27	0.09	0.20	AVERAGE
3	0.22319	27.26	-25.44	52.70	26.98	0.08	0.20	AVERAGE
4	0.22319	38.95	-23.75	62.70	38.67	0.08	0.20	QP
5	3.922	22.41	-23.59	46.00	21.97	0.14	0.30	AVERAGE
6	3.922	35.00	-21.00	56.00	34.56	0.14	0.30	QP
7	5.929	38.27	-21.73	60.00	37.72	0.25	0.30	QP
8	5.929	30.04	-19.96	50.00	29.49	0.25	0.30	AVERAGE
9	10.733	31.97	-28.03	60.00	31.15	0.42	0.40	QP
10	10.733	27.02	-22.98	50.00	26.20	0.42	0.40	AVERAGE
11	16.398	22.22	-27.78	50.00	21.15	0.65	0.42	AVERAGE
12	16.398	30.17	-29.83	60.00	29.10	0.65	0.42	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.


<For Second Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	23°C	Humidity	54%
Test Engineer	Sin Chang	Phase	Line
Configuration	Normal Link		

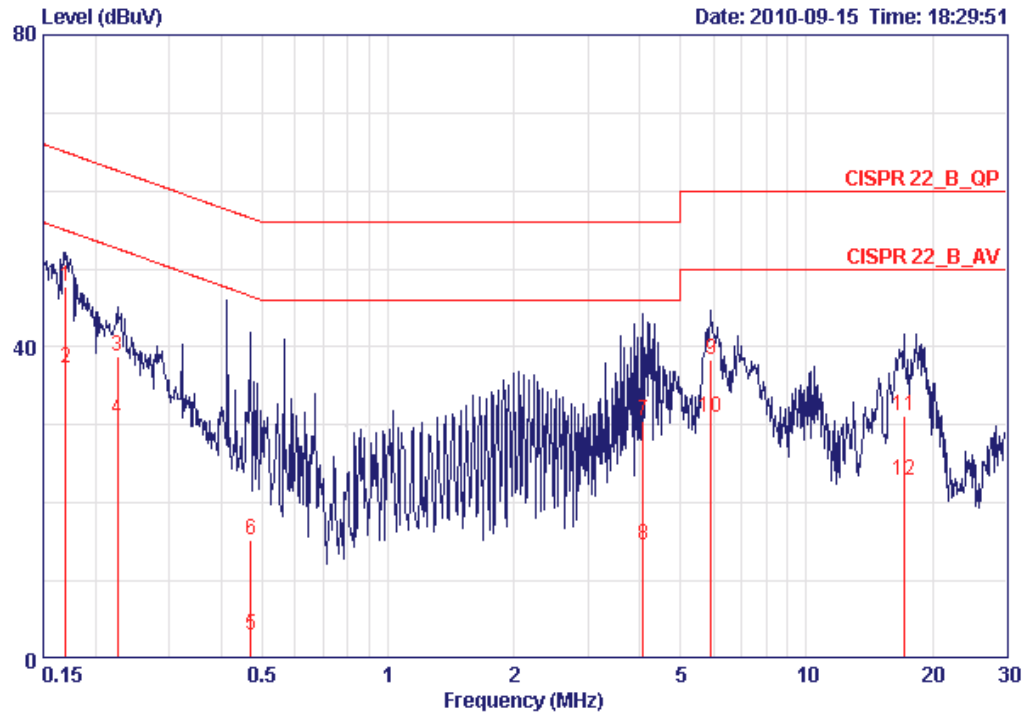

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16944	47.84	-17.14	64.99	47.58	0.06	0.20	QP
2	0.16944	37.22	-17.76	54.99	36.96	0.06	0.20	AVERAGE
3	0.22556	38.80	-23.81	62.61	38.55	0.05	0.20	QP
4	0.22556	30.84	-21.77	52.61	30.59	0.05	0.20	AVERAGE
5	0.47110	3.07	-43.42	46.49	2.84	0.03	0.20	AVERAGE
6	0.47110	15.34	-41.15	56.49	15.11	0.03	0.20	QP
7	4.070	30.50	-25.50	56.00	30.09	0.11	0.30	QP
8	4.070	14.70	-31.30	46.00	14.29	0.11	0.30	AVERAGE
9	5.929	38.47	-21.53	60.00	37.96	0.21	0.30	QP
10	5.929	31.02	-18.98	50.00	30.51	0.21	0.30	AVERAGE
11	17.109	31.16	-28.84	60.00	29.98	0.68	0.50	QP
12	17.109	22.97	-27.03	50.00	21.79	0.68	0.50	AVERAGE

Temperature	23°C	Humidity	54%
Test Engineer	Sin Chang	Phase	Neutral
Configuration	Normal Link		

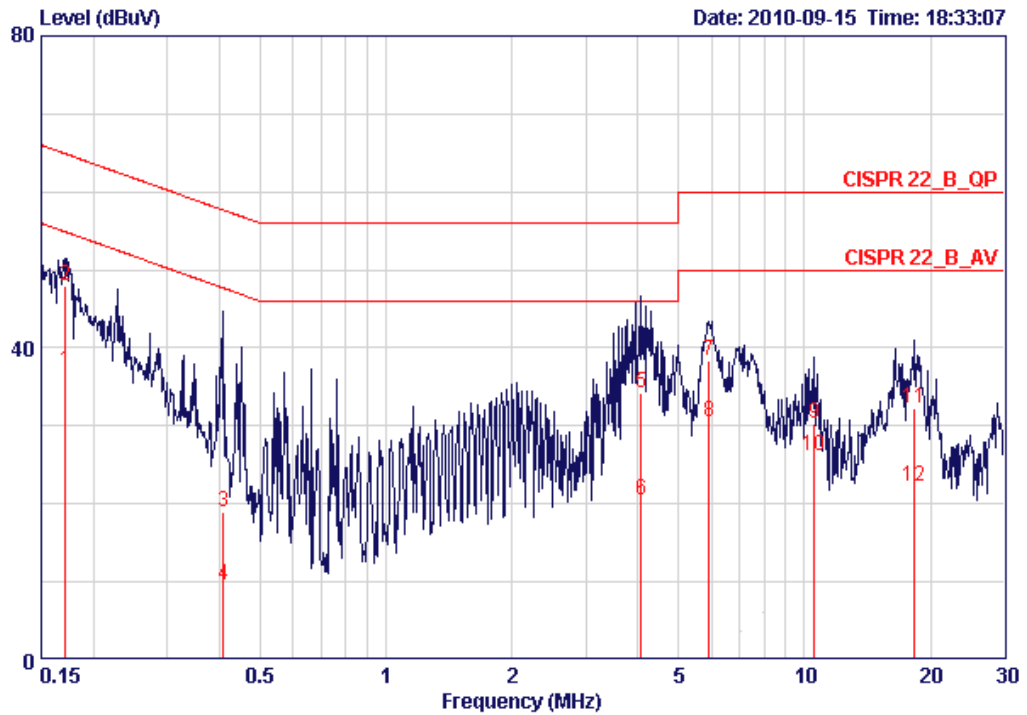


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17125	37.07	-17.83	54.90	36.78	0.09	0.20	AVERAGE
2	0.17125	47.87	-17.03	64.90	47.58	0.09	0.20	QP
3	0.40831	18.87	-38.81	57.68	18.60	0.07	0.20	QP
4	0.40831	9.53	-38.15	47.68	9.26	0.07	0.20	AVERAGE
5	4.070	34.15	-21.85	56.00	33.70	0.15	0.30	QP
6	4.070	20.55	-25.45	46.00	20.10	0.15	0.30	AVERAGE
7	5.929	38.33	-21.67	60.00	37.78	0.25	0.30	QP
8	5.929	30.43	-19.57	50.00	29.88	0.25	0.30	AVERAGE
9	10.564	30.34	-29.66	60.00	29.53	0.42	0.39	QP
10	10.564	26.25	-23.75	50.00	25.44	0.42	0.39	AVERAGE
11	18.328	32.17	-27.83	60.00	30.94	0.73	0.50	QP
12	18.328	22.27	-27.73	50.00	21.04	0.73	0.50	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.


<For Second Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Temperature	23°C	Humidity	54%
Test Engineer	Sin Chang	Phase	Line
Configuration	Normal Link		

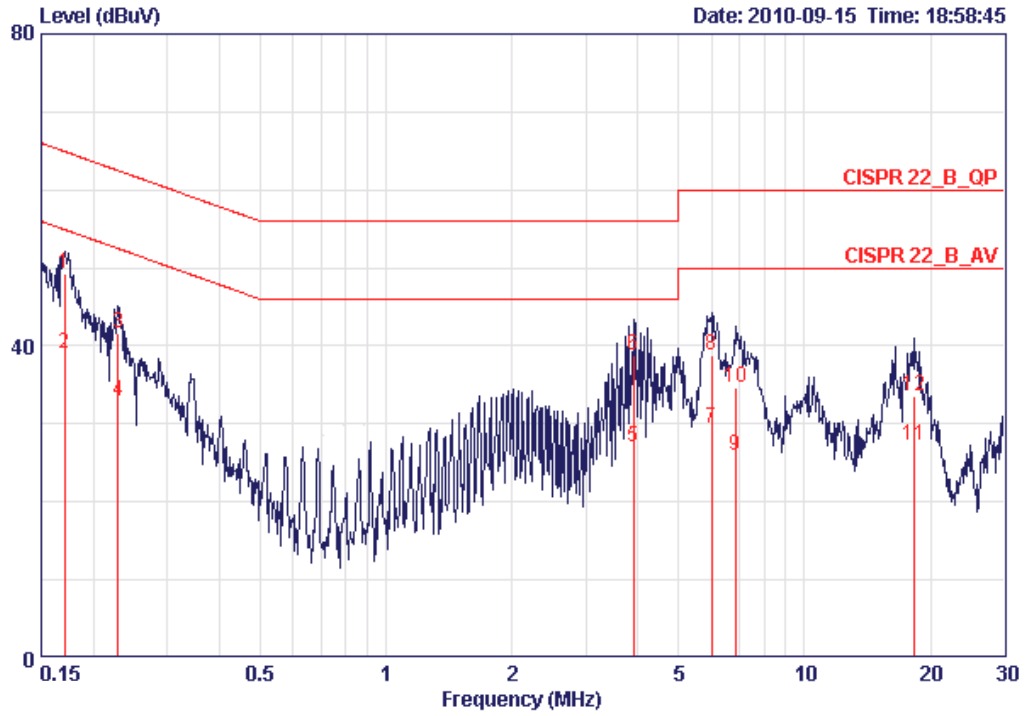

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17034	49.16	-15.78	64.94	48.90	0.06	0.20	QP
2	0.17034	38.94	-16.00	54.94	38.68	0.06	0.20	AVERAGE
3	0.22918	41.58	-20.90	62.48	41.33	0.05	0.20	QP
4	0.22918	32.94	-19.54	52.48	32.69	0.05	0.20	AVERAGE
5	3.901	27.04	-18.96	46.00	26.64	0.10	0.30	AVERAGE
6	3.901	38.71	-17.29	56.00	38.31	0.10	0.30	QP
7	5.993	29.36	-20.64	50.00	28.85	0.21	0.30	AVERAGE
8	5.993	38.82	-21.18	60.00	38.31	0.21	0.30	QP
9	6.841	26.02	-23.98	50.00	25.45	0.25	0.33	AVERAGE
10	6.841	34.64	-25.36	60.00	34.07	0.25	0.33	QP
11	18.232	27.29	-22.71	50.00	26.05	0.74	0.50	AVERAGE
12	18.232	33.60	-26.40	60.00	32.36	0.74	0.50	QP

Temperature	23°C	Humidity	54%
Test Engineer	Sin Chang	Phase	Neutral
Configuration	Normal Link		

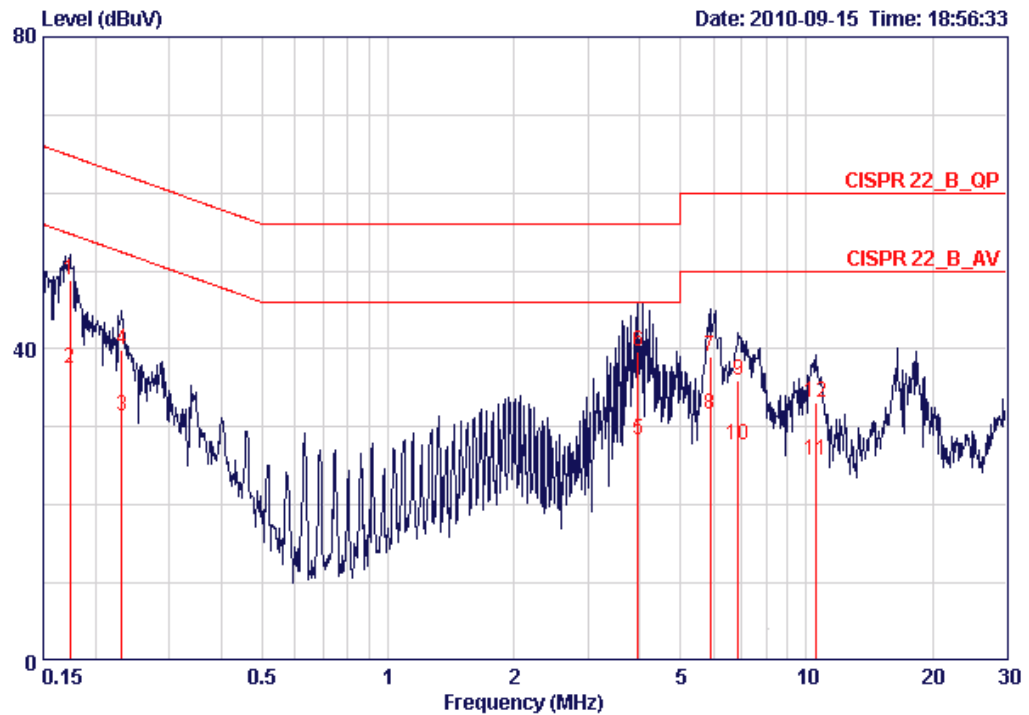

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17399	48.84	-15.93	64.77	48.55	0.09	0.20	QP
2	0.17399	37.50	-17.27	54.77	37.21	0.09	0.20	AVERAGE
3	0.23162	31.43	-20.96	52.39	31.15	0.08	0.20	AVERAGE
4	0.23162	39.85	-22.54	62.39	39.57	0.08	0.20	QP
5	3.964	28.34	-17.66	46.00	27.90	0.14	0.30	AVERAGE
6	3.964	39.57	-16.43	56.00	39.13	0.14	0.30	QP
7	5.898	38.93	-21.07	60.00	38.38	0.25	0.30	QP
8	5.898	31.72	-18.28	50.00	31.17	0.25	0.30	AVERAGE
9	6.878	35.98	-24.02	60.00	35.36	0.29	0.33	QP
10	6.878	27.59	-22.41	50.00	26.97	0.29	0.33	AVERAGE
11	10.508	25.80	-24.20	50.00	25.00	0.41	0.39	AVERAGE
12	10.508	33.17	-26.83	60.00	32.37	0.41	0.39	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Conducted Peak Output Power Measurement

4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (21dBm). The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	MA2411B

4.2.3. Test Procedures

7. The transmitter output (antenna port) was connected to the power meter.
8. Turn on the EUT and power meter and then record the peak power value.
9. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

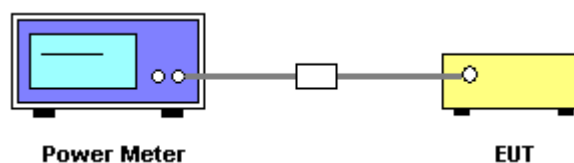

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Conducted Peak Output Power

<For Main Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	26°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Sep. 29, 2010		

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	10.72	21.00	Complies
39	2441 MHz	11.69	21.00	Complies
78	2480 MHz	11.56	21.00	Complies

<For Main Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Temperature	26°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Sep. 29, 2010		

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	10.51	21.00	Complies
39	2441 MHz	11.69	21.00	Complies
78	2480 MHz	11.56	21.00	Complies

<For Second Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	26°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Sep. 29, 2010		

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	10.68	21.00	Complies
39	2441 MHz	11.63	21.00	Complies
78	2480 MHz	11.14	21.00	Complies

<For Second Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Temperature	26°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Sep. 29, 2010		

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	10.68	21.00	Complies
39	2441 MHz	11.63	21.00	Complies
78	2480 MHz	11.14	21.00	Complies

4.3. Hopping Channel Separation Measurement

4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

4.3.4. Test Setup Layout

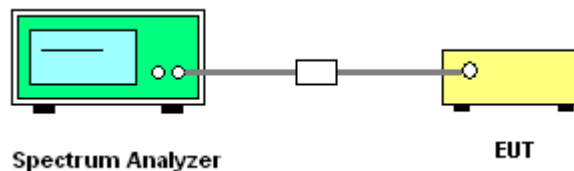

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Hopping Channel Separation

<For Main Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	26°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Sep. 29, 2010		

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	2/3 of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	1.3000	0.867	1.1720	Complies
2441 MHz	1.00	1.2960	0.864	1.1880	Complies
2480 MHz	1.00	1.3000	0.867	1.1760	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth

<For Main Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Temperature	26°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Sep. 29, 2010		

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	2/3 of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	1.3000	0.867	1.1720	Complies
2441 MHz	1.00	1.2960	0.864	1.1880	Complies
2480 MHz	1.00	1.3000	0.867	1.1760	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth

<For Second Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	26°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Sep. 29, 2010		

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	2/3 of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	1.3000	0.867	1.1720	Complies
2441 MHz	1.00	1.3040	0.869	1.2200	Complies
2480 MHz	1.00	1.3160	0.877	1.1920	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth

<For Second Source – EUT 2 (Mode 2 with PIFA Antenna)>:


Temperature	26°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Sep. 29, 2010		

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	2/3 of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	1.3000	0.867	1.1720	Complies
2441 MHz	1.00	1.3040	0.869	1.2200	Complies
2480 MHz	1.00	1.3160	0.877	1.1920	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth


<For Main Source – EUT 2 (Mode 1 with Dipole Antenna)>:

20 dB Bandwidth Plot on Channel 0 / 2402 MHz

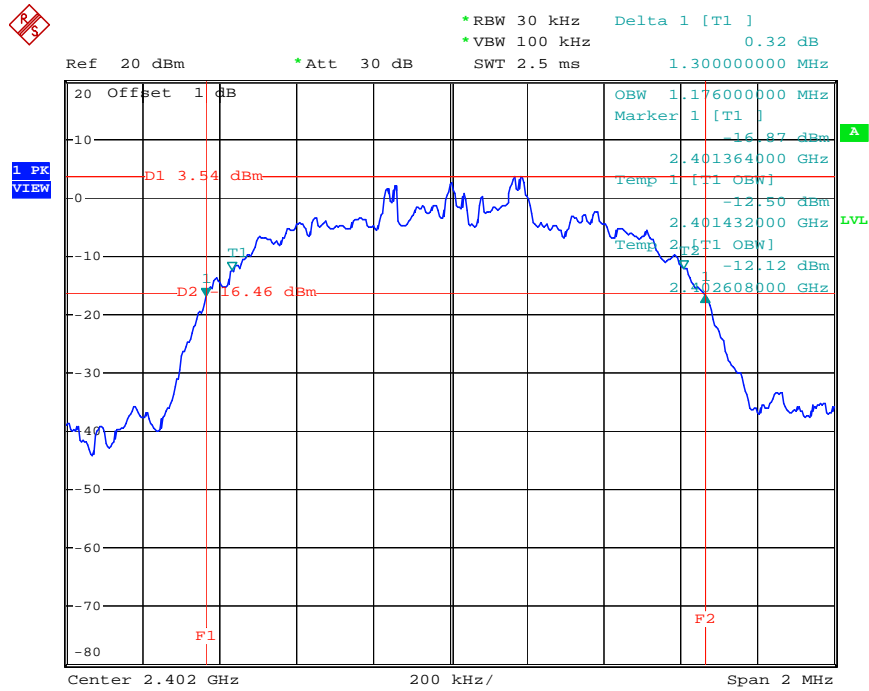


Date: 29.SEP.2010 13:05:57

20 dB Bandwidth Plot on Channel 39 / 2441 MHz

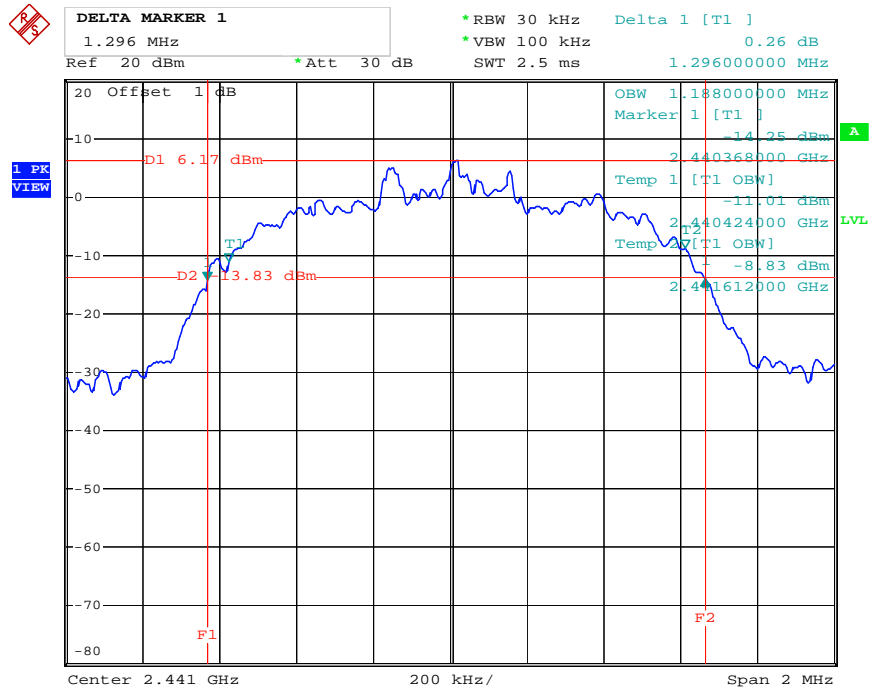


Date: 29.SEP.2010 13:03:58

20 dB Bandwidth Plot on Channel 78 / 2480 MHz

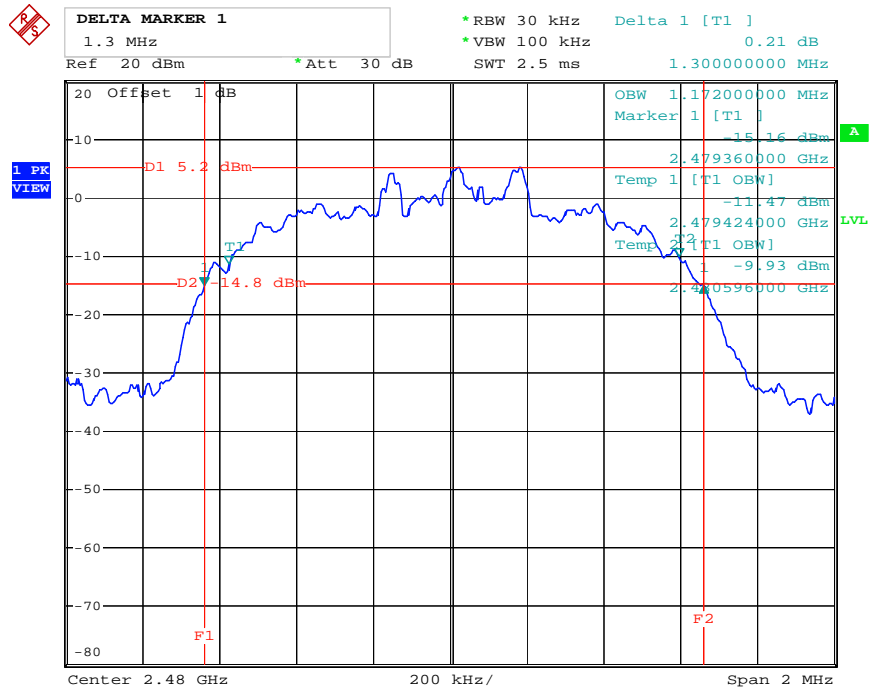


Date: 29.SEP.2010 13:01:50

Channel Separation Plot on Channel 0~1 / 2402 MHz~ 2403 MHz

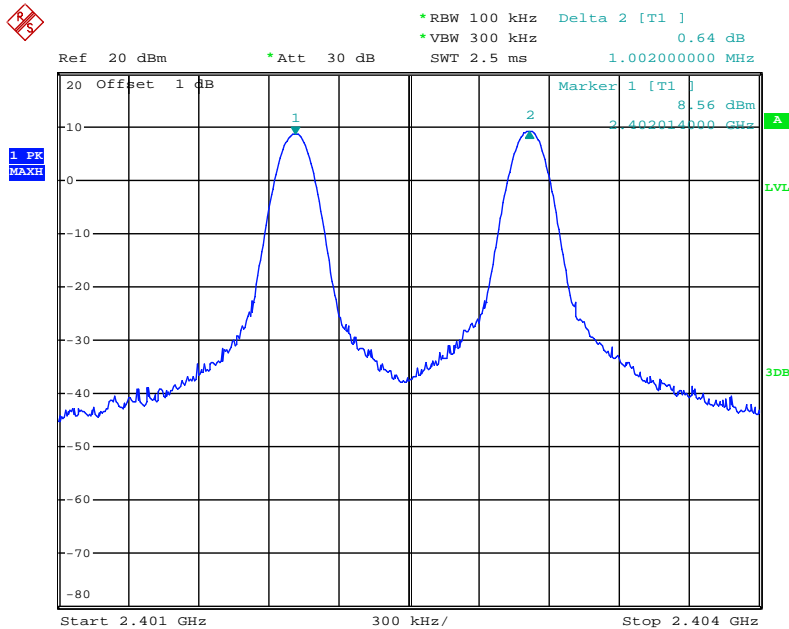


Date: 29.SEP.2010 15:07:59

Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz

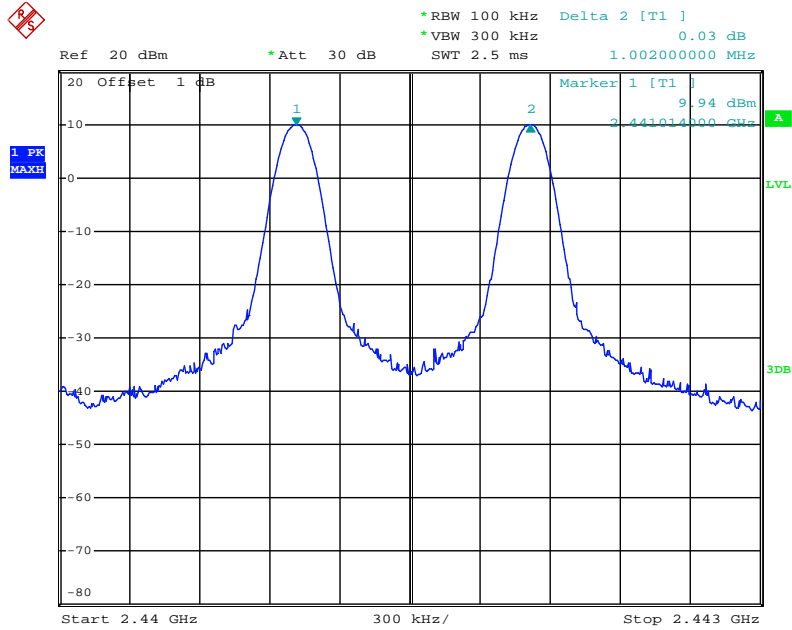

Date: 29.SEP.2010 15:09:21


Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz

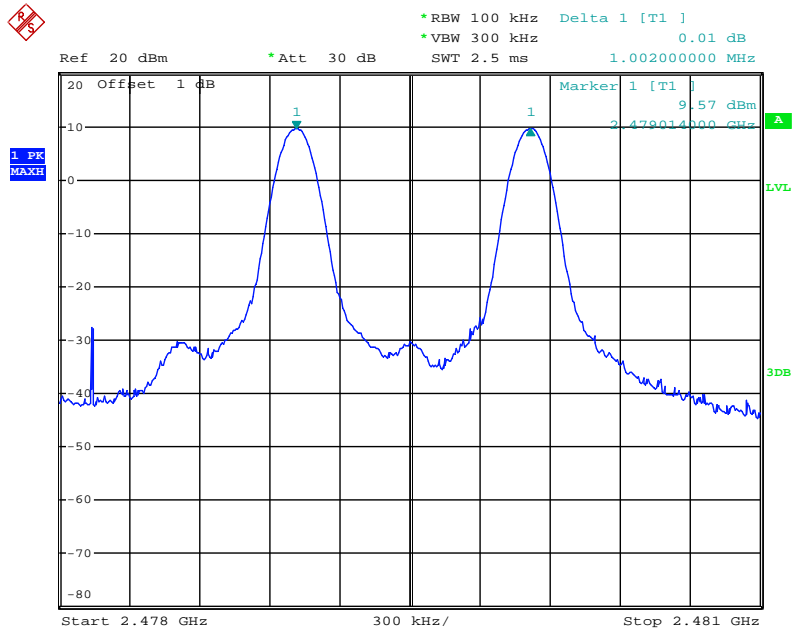

Date: 29.SEP.2010 15:12:14


<For Main Source – EUT 2 (Mode 2 with PIFA Antenna)>:

20 dB Bandwidth Plot on Channel 0 / 2402 MHz

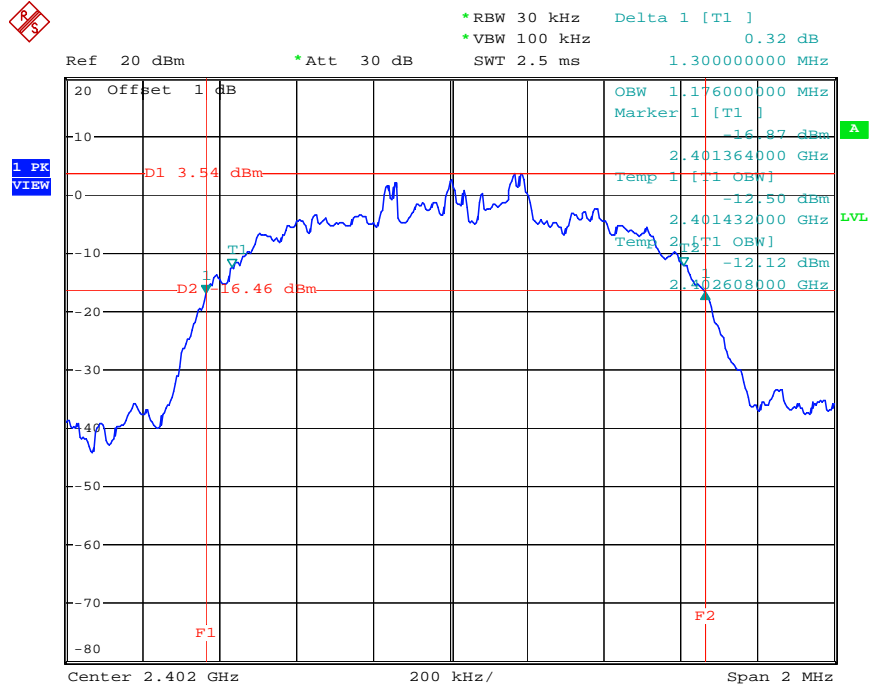


Date: 29.SEP.2010 13:05:57

20 dB Bandwidth Plot on Channel 39 / 2441 MHz

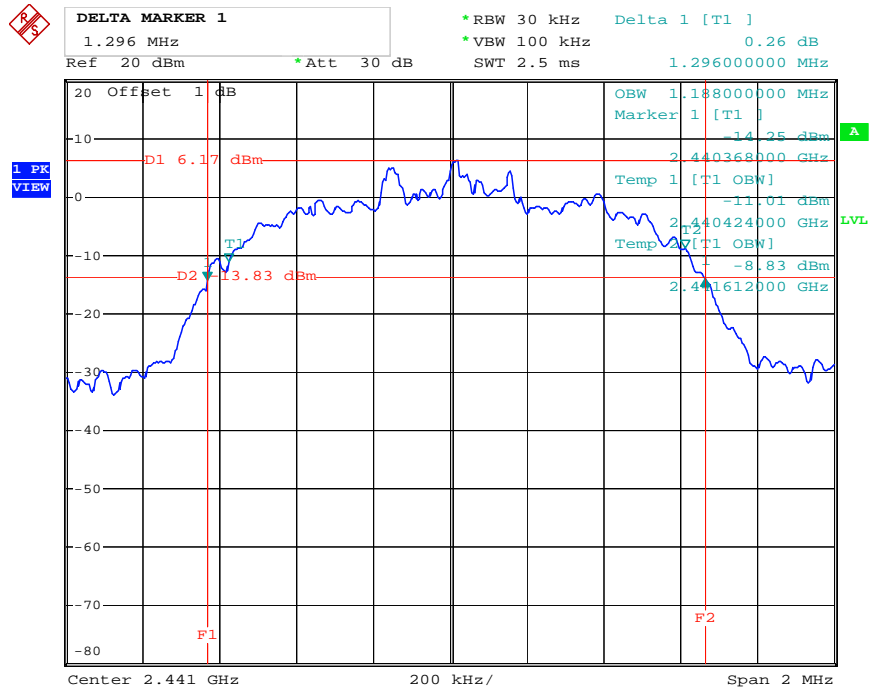


Date: 29.SEP.2010 13:03:58

20 dB Bandwidth Plot on Channel 78 / 2480 MHz

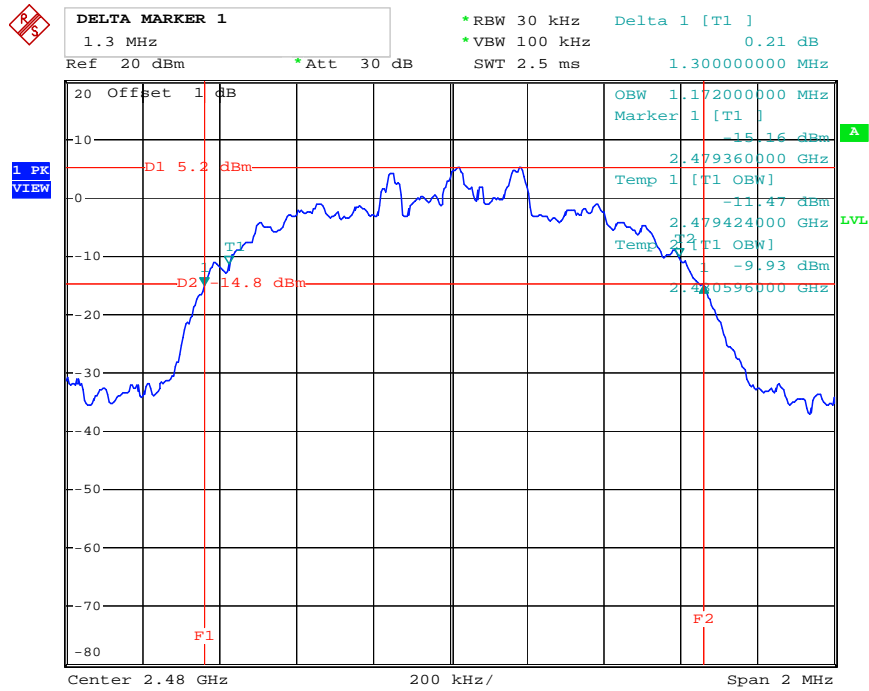


Date: 29.SEP.2010 13:01:50

Channel Separation Plot on Channel 0~1 / 2402 ~ 2403 MHz

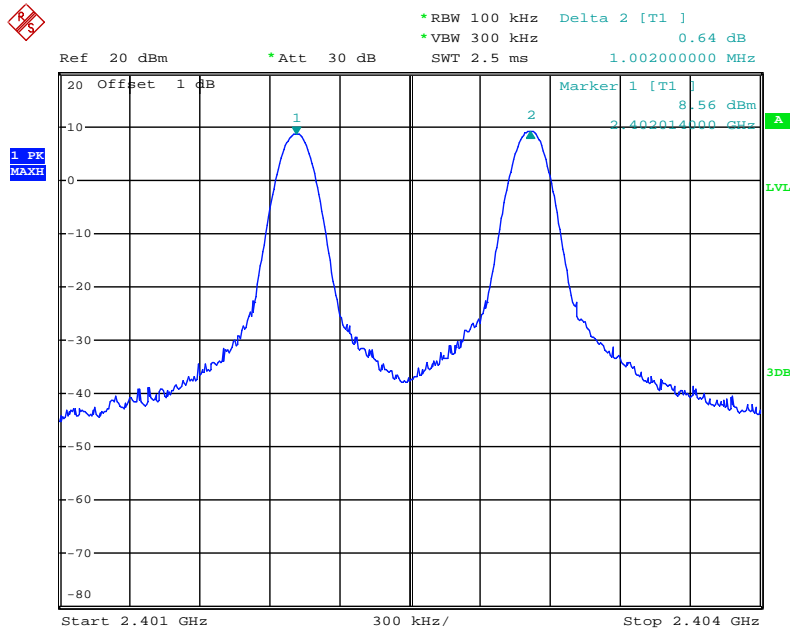


Date: 29.SEP.2010 15:07:59

Channel Separation Plot on Channel 39~40 / 2441 MHz~ 2442 MHz

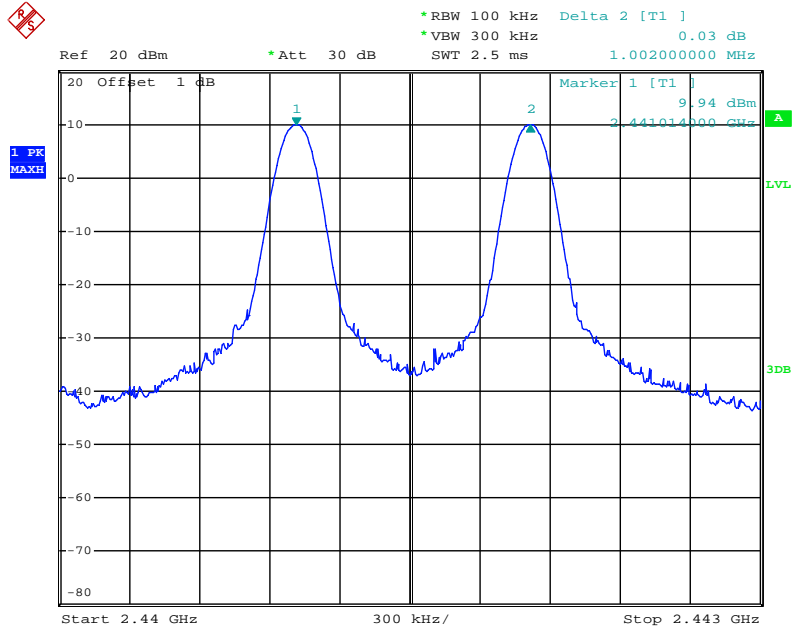

Date: 29.SEP.2010 15:09:21


Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz

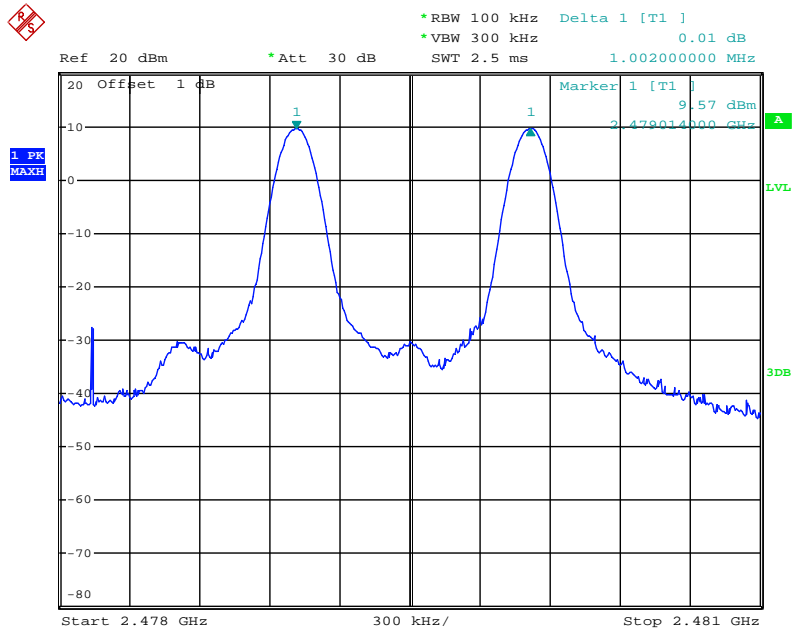

Date: 29.SEP.2010 15:12:14


<For Second Source – EUT 2 (Mode 1 with Dipole Antenna)>:

20 dB Bandwidth Plot on Channel 0 / 2402 MHz

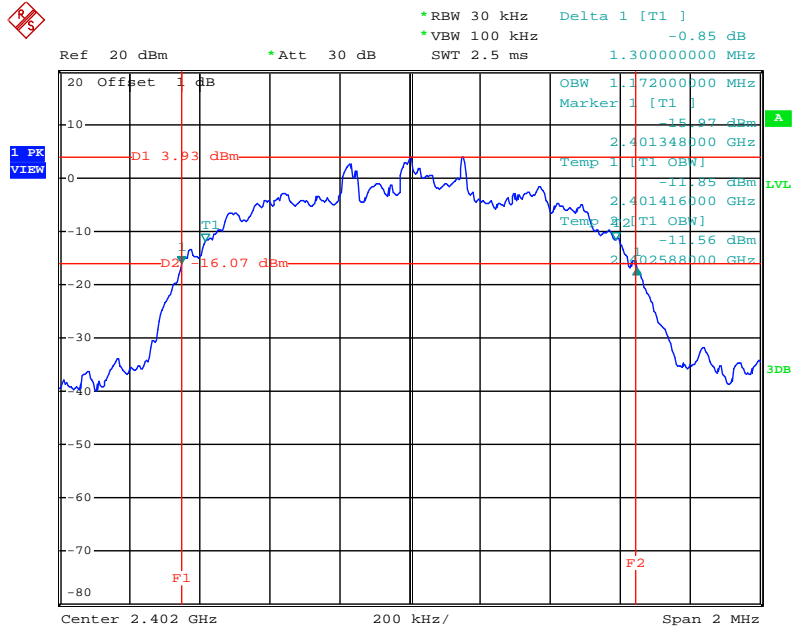


Date: 29.SEP.2010 14:09:16

20 dB Bandwidth Plot on Channel 39 / 2441 MHz

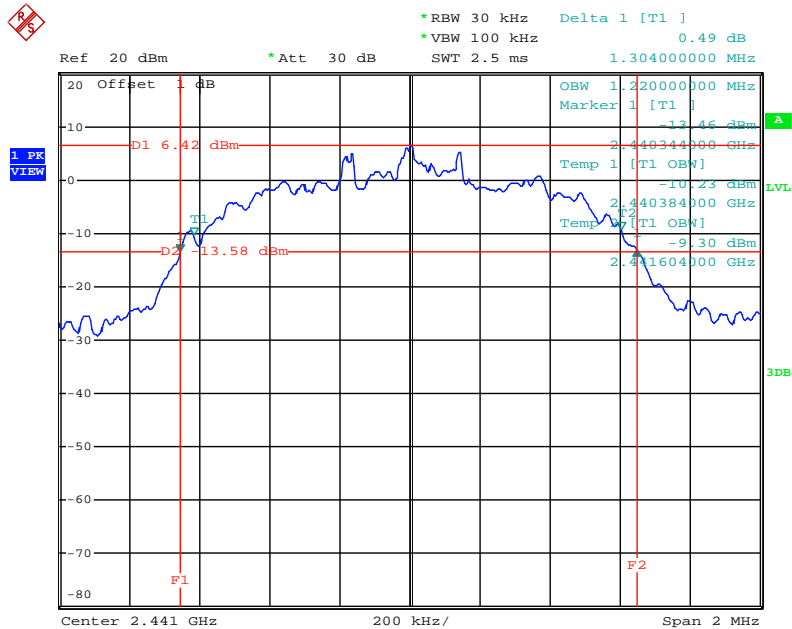


Date: 29.SEP.2010 14:12:09

20 dB Bandwidth Plot on Channel 78 / 2480 MHz

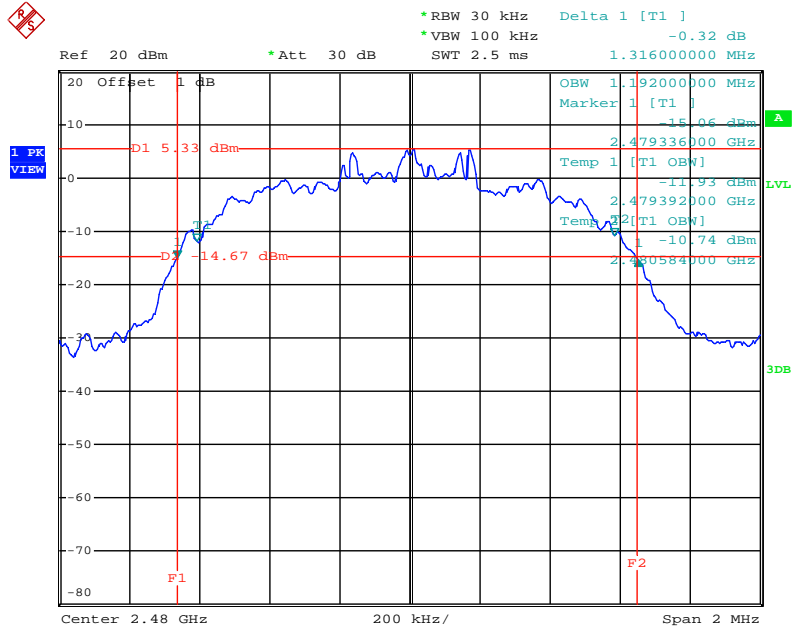


Date: 29.SEP.2010 14:19:29

Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz

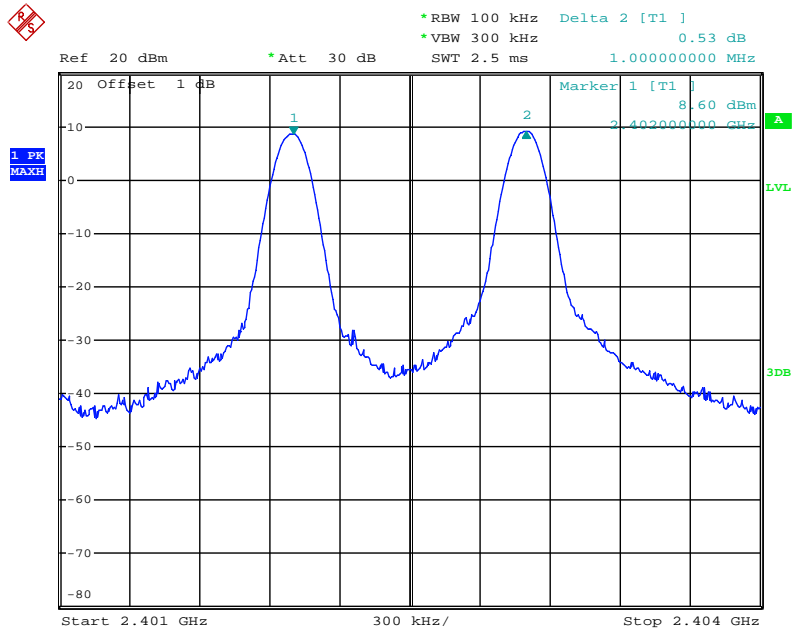


Date: 29.SEP.2010 14:40:26

Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz

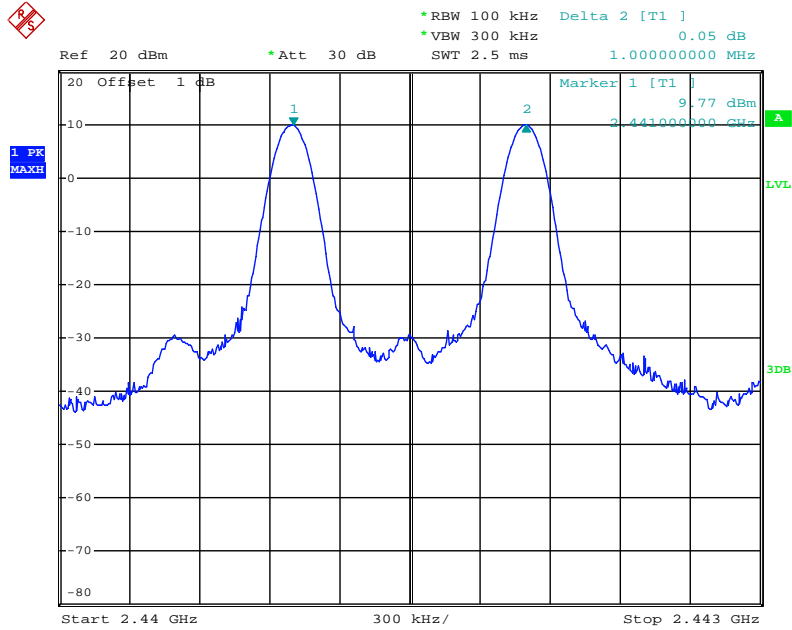

Date: 29.SEP.2010 14:41:21


Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz

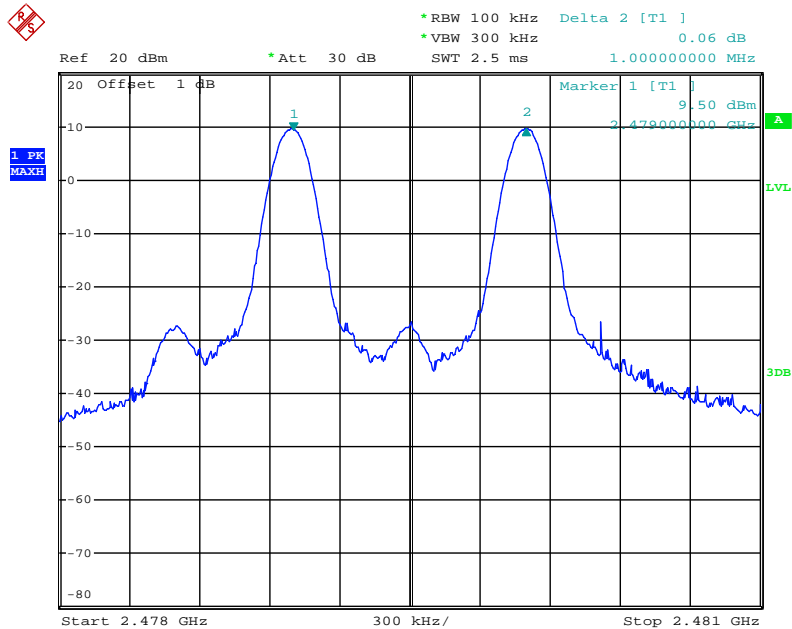

Date: 29.SEP.2010 14:42:10


<For Second Source – EUT 2 (Mode 2 with PIFA Antenna)>:

20 dB Bandwidth Plot on Channel 0 / 2402 MHz

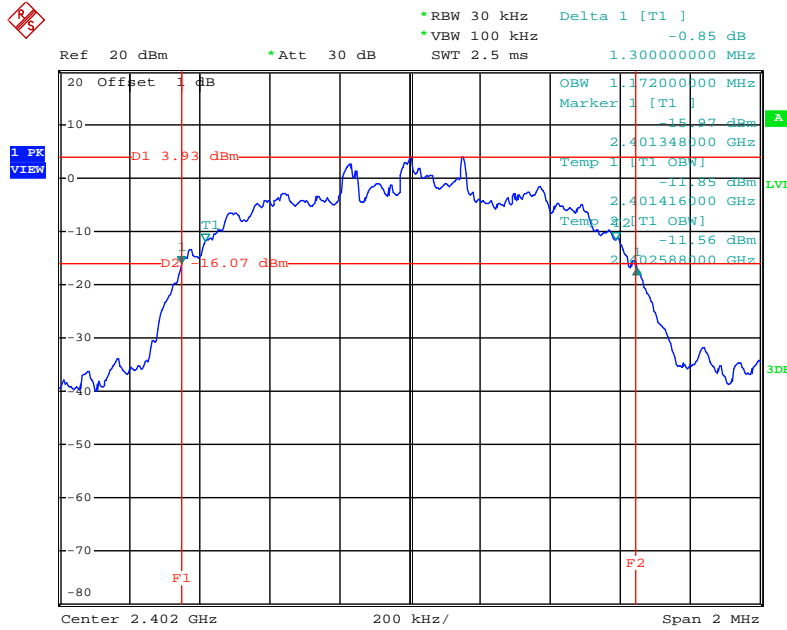


Date: 29.SEP.2010 14:09:16

20 dB Bandwidth Plot on Channel 39 / 2441 MHz

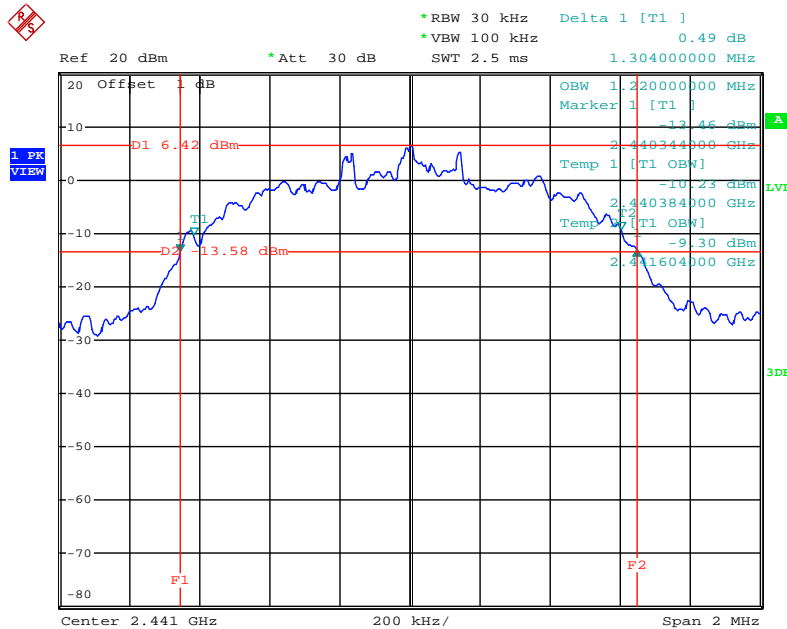


Date: 29.SEP.2010 14:12:09

20 dB Bandwidth Plot on Channel 78 / 2480 MHz

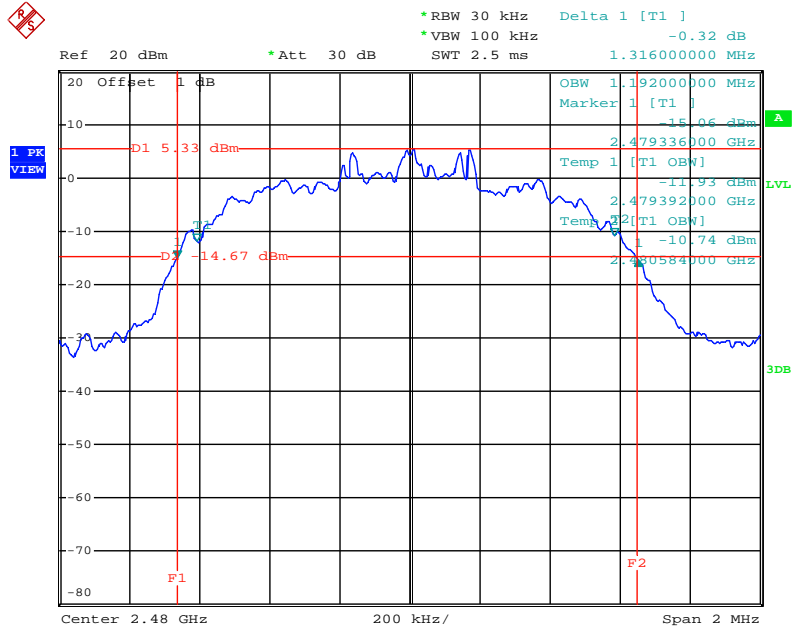


Date: 29.SEP.2010 14:19:29

Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz

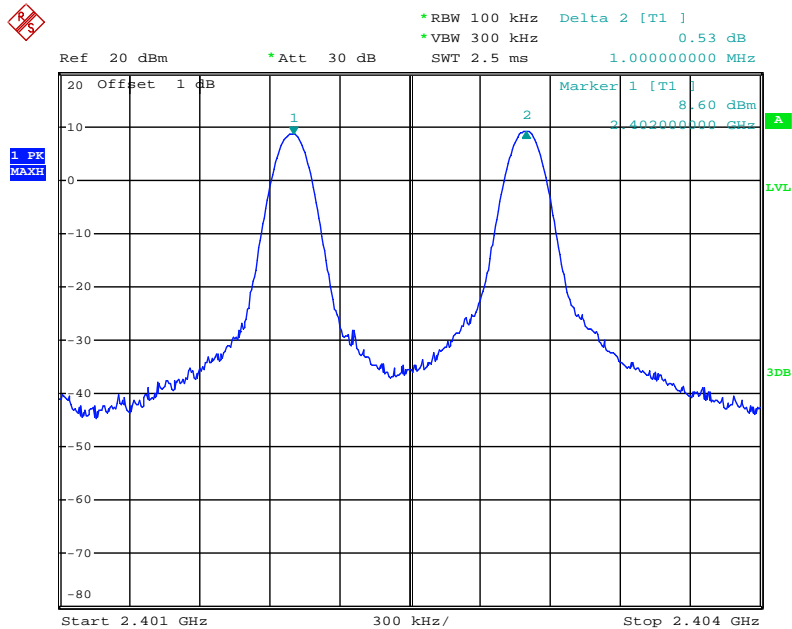


Date: 29.SEP.2010 14:40:26

Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz

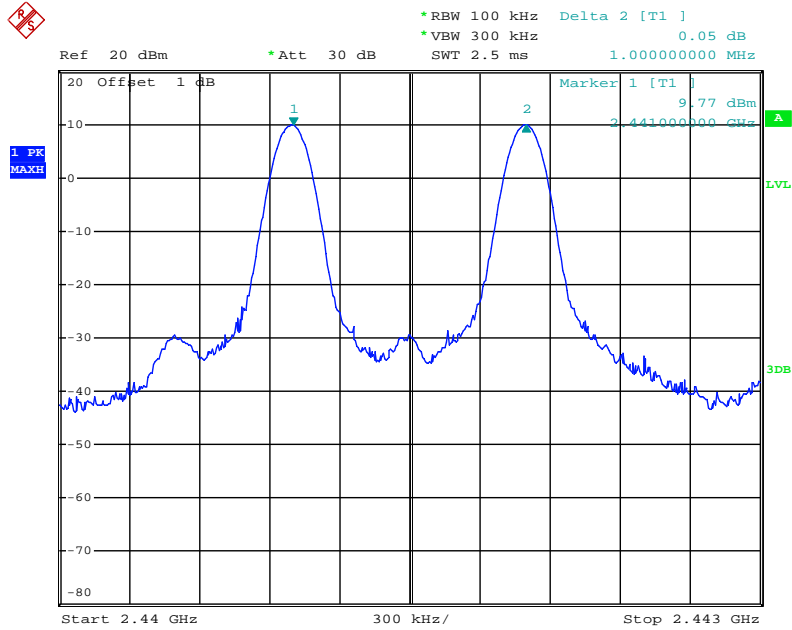

Date: 29.SEP.2010 14:41:21

Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz

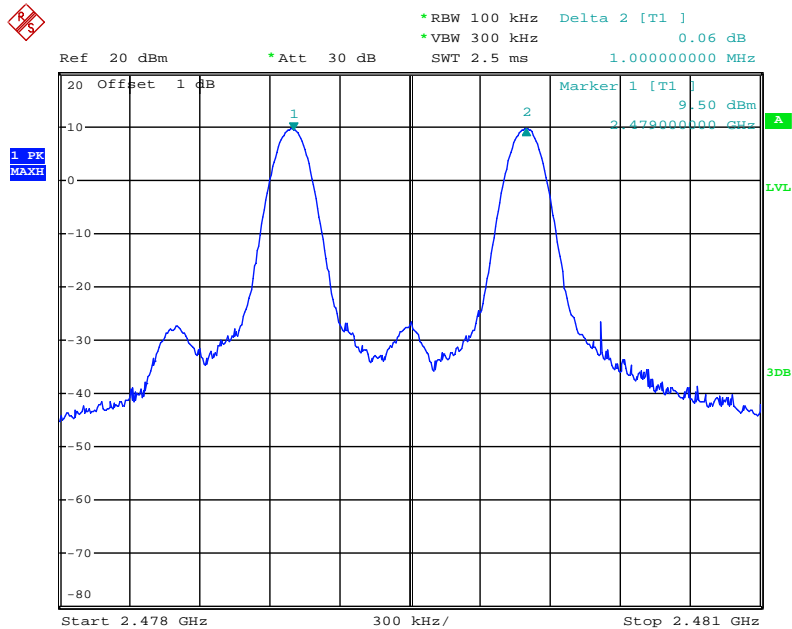

Date: 29.SEP.2010 14:42:10

4.4. Number of Hopping Frequency Measurement

4.4.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

4.4.4. Test Setup Layout

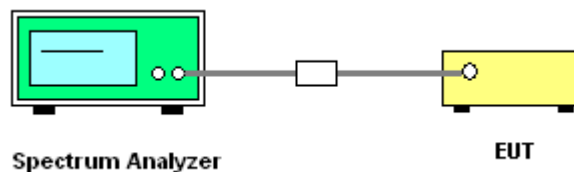

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Number of Hopping Frequency

<For Main Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	23°C	Humidity	56%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Sep. 29, 2010		

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
8DPSK	0 ~ 78	2402 ~ 2480	79	75	Complies

<For Main Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Temperature	23°C	Humidity	56%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Sep. 29, 2010		

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
8DPSK	0 ~ 78	2402 ~ 2480	79	75	Complies

<For Second Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	23°C	Humidity	56%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Sep. 29, 2010		

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
8DPSK	0 ~ 78	2402 ~ 2480	79	75	Complies


<For Second Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Temperature	23°C	Humidity	56%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Sep. 29, 2010		

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
8DPSK	0 ~ 78	2402 ~ 2480	79	75	Complies

<For Main Source – EUT 2 (Mode 1 with Dipole Antenna)>:


Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

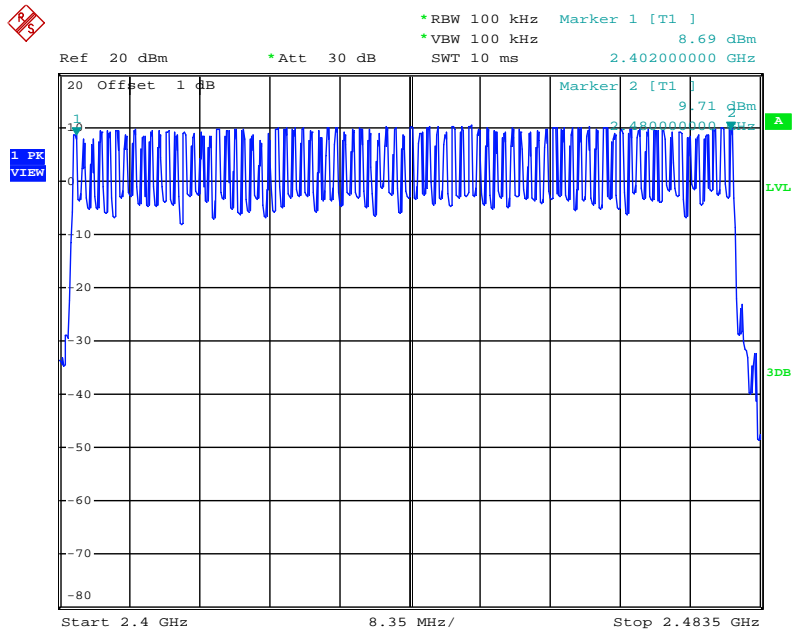

Date: 29.SEP.2010 15:26:40

<For Main Source – EUT 2 (Mode 2 with PIFA Antenna)>:


Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

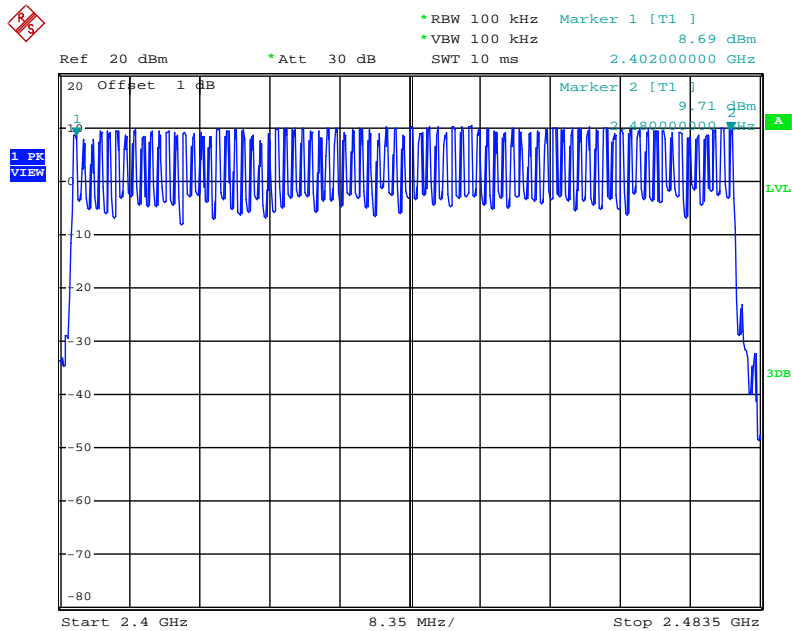

Date: 29.SEP.2010 15:26:40

<For Second Source – EUT 2 (Mode 1 with Dipole Antenna)>:


Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

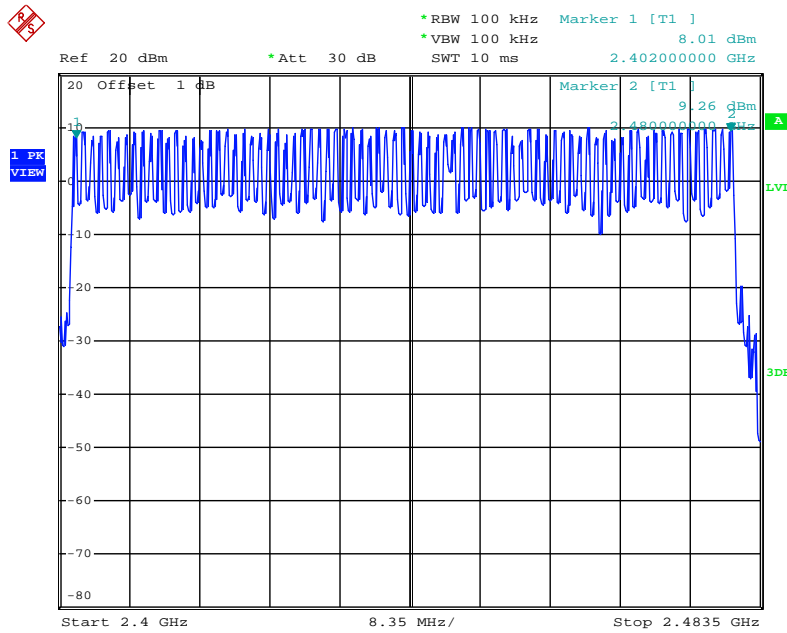

Date: 29.SEP.2010 14:45:51

<For Second Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

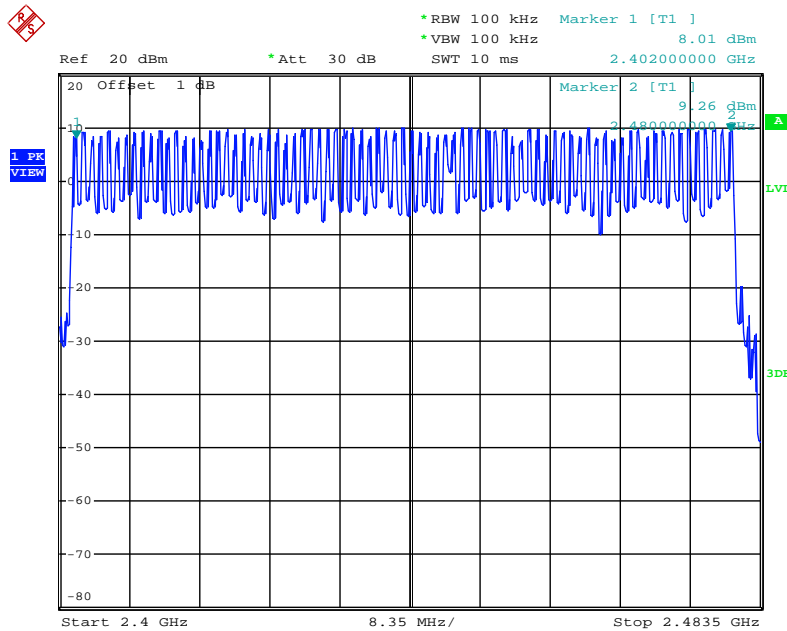

Date: 29.SEP.2010 14:45:51

4.5. Dwell Time Measurement

4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1000 kHz
VB	1000 kHz
Detector	Peak
Trace	Single Trigger

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for 3DH5, 3DH3 and 3DH1 packet transmitting.
8. Measure the maximum time duration of one single pulse.
9. 3DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
10. 3DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
11. 3DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.

4.5.4. Test Setup Layout

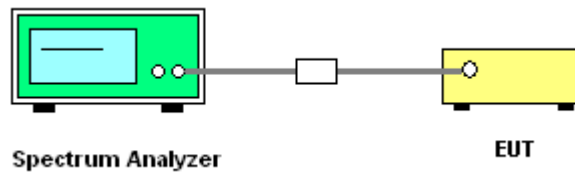

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Dwell Time

<For Main Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	23°C	Humidity	56%
Test Engineer	Sean Ku	Configurations	3DH1, 3DH3, 3DH5
Test Date	Sep. 29, 2010		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
3DH5	2402 MHz	2.9100	0.3104	0.4000	Complies
3DH3	2402 MHz	1.6700	0.2672	0.4000	Complies
3DH1	2402 MHz	0.4100	0.1312	0.4000	Complies
3DH5	2441 MHz	2.9200	0.3115	0.4000	Complies
3DH3	2441 MHz	1.6700	0.2672	0.4000	Complies
3DH1	2441 MHz	0.4100	0.1312	0.4000	Complies
3DH5	2480 MHz	2.9100	0.3104	0.4000	Complies
3DH3	2480 MHz	1.6700	0.2672	0.4000	Complies
3DH1	2480 MHz	0.4150	0.1328	0.4000	Complies

<For Main Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Temperature	23°C	Humidity	56%
Test Engineer	Sean Ku	Configurations	3DH1, 3DH3, 3DH5
Test Date	Sep. 29, 2010		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
3DH5	2402 MHz	2.9100	0.3104	0.4000	Complies
3DH3	2402 MHz	1.6700	0.2672	0.4000	Complies
3DH1	2402 MHz	0.4100	0.1312	0.4000	Complies
3DH5	2441 MHz	2.9200	0.3115	0.4000	Complies
3DH3	2441 MHz	1.6700	0.2672	0.4000	Complies
3DH1	2441 MHz	0.4100	0.1312	0.4000	Complies
3DH5	2480 MHz	2.9100	0.3104	0.4000	Complies
3DH3	2480 MHz	1.6700	0.2672	0.4000	Complies
3DH1	2480 MHz	0.4150	0.1328	0.4000	Complies

<For Second Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	23°C	Humidity	56%
Test Engineer	Sean Ku	Configurations	3DH1, 3DH3, 3DH5
Test Date	Sep. 29, 2010		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
3DH5	2402 MHz	2.9300	0.3125	0.4000	Complies
3DH3	2402 MHz	1.6700	0.2672	0.4000	Complies
3DH1	2402 MHz	0.4200	0.1344	0.4000	Complies
3DH5	2441 MHz	2.9300	0.3125	0.4000	Complies
3DH3	2441 MHz	1.6700	0.2672	0.4000	Complies
3DH1	2441 MHz	0.4200	0.1344	0.4000	Complies
3DH5	2480 MHz	2.9300	0.3125	0.4000	Complies
3DH3	2480 MHz	1.6900	0.2704	0.4000	Complies
3DH1	2480 MHz	0.4150	0.1328	0.4000	Complies


<For Second Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Temperature	23°C	Humidity	56%
Test Engineer	Sean Ku	Configurations	3DH1, 3DH3, 3DH5
Test Date	Sep. 29, 2010		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
3DH5	2402 MHz	2.9300	0.3125	0.4000	Complies
3DH3	2402 MHz	1.6700	0.2672	0.4000	Complies
3DH1	2402 MHz	0.4200	0.1344	0.4000	Complies
3DH5	2441 MHz	2.9300	0.3125	0.4000	Complies
3DH3	2441 MHz	1.6700	0.2672	0.4000	Complies
3DH1	2441 MHz	0.4200	0.1344	0.4000	Complies
3DH5	2480 MHz	2.9300	0.3125	0.4000	Complies
3DH3	2480 MHz	1.6900	0.2704	0.4000	Complies
3DH1	2480 MHz	0.4150	0.1328	0.4000	Complies


<For Main Source – EUT 2 (Mode 1 with Dipole Antenna)>:

3DH5 Dwell Time Plot on Channel 0 / 2402 MHz

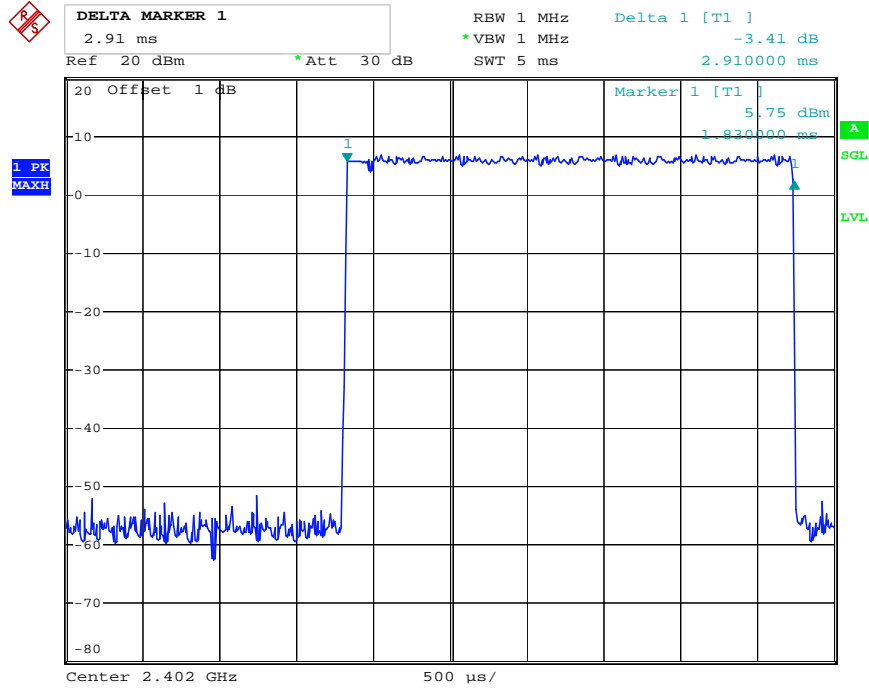


Date: 29.SEP.2010 13:07:22

3DH3 Dwell Time Plot on Channel 0 / 2402 MHz

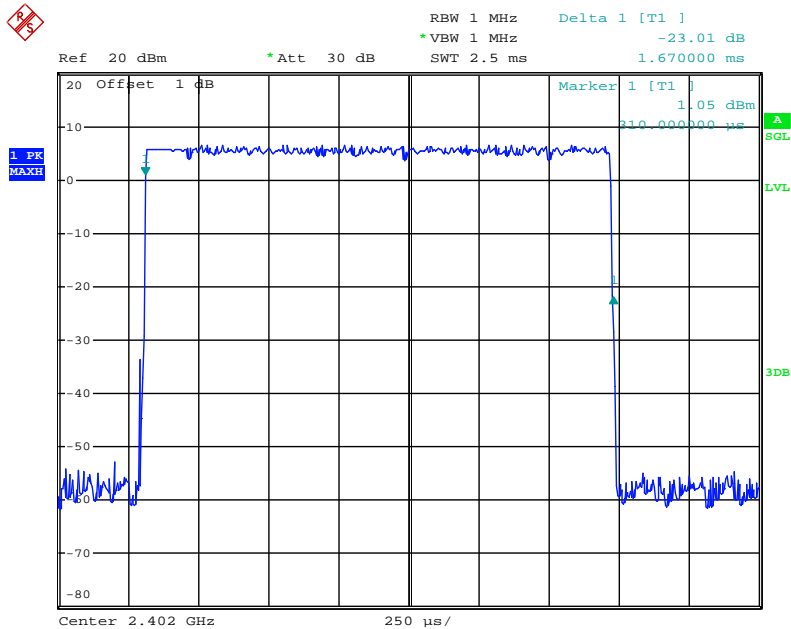


Date: 29.SEP.2010 15:05:29

3DH1 Dwell Time Plot on Channel 0 / 2402 MHz

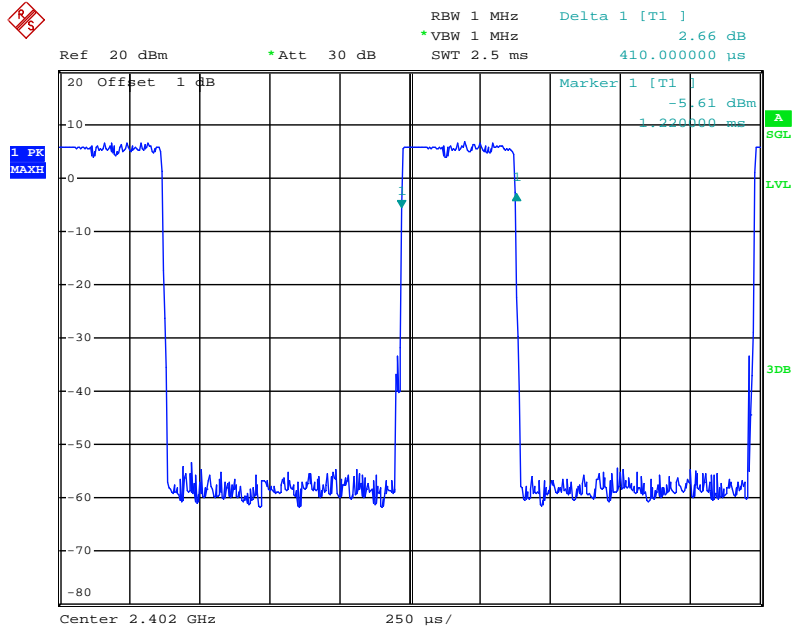


Date: 29.SEP.2010 15:00:10

3DH5 Dwell Time Plot on Channel 39 / 2441 MHz

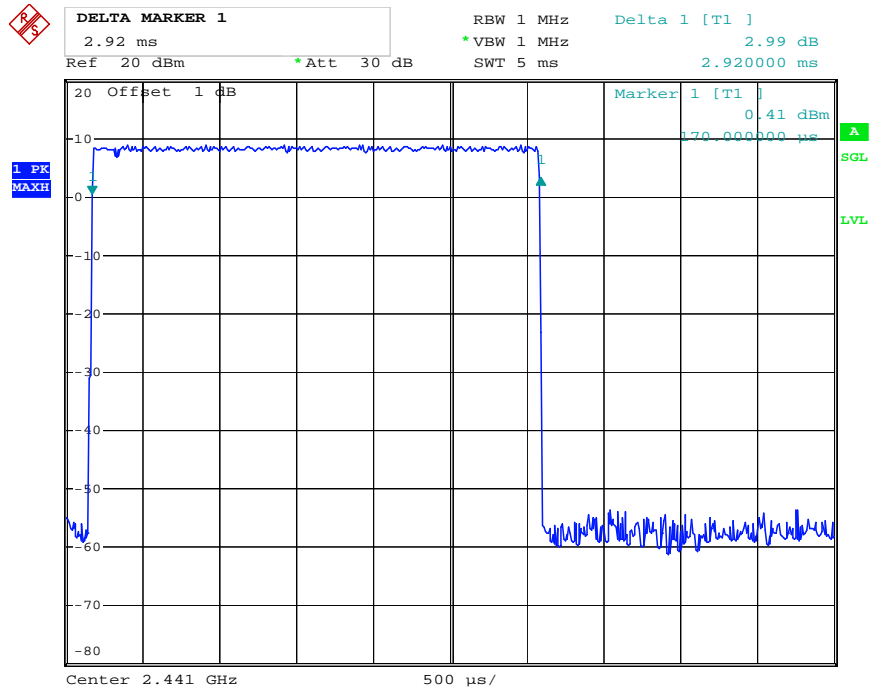


Date: 29.SEP.2010 13:08:26

3DH3 Dwell Time Plot on Channel 39 / 2441 MHz

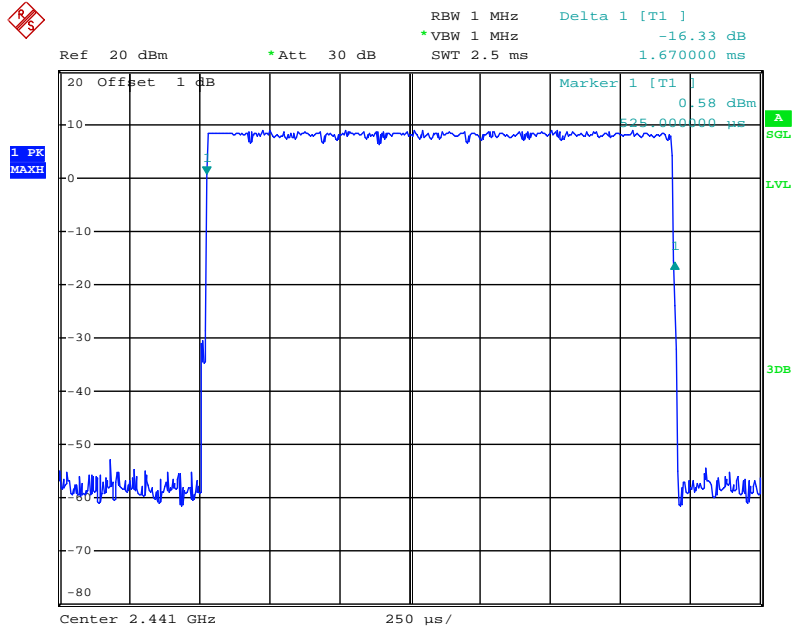


Date: 29.SEP.2010 15:04:32

3DH1 Dwell Time Plot on Channel 39 / 2441 MHz

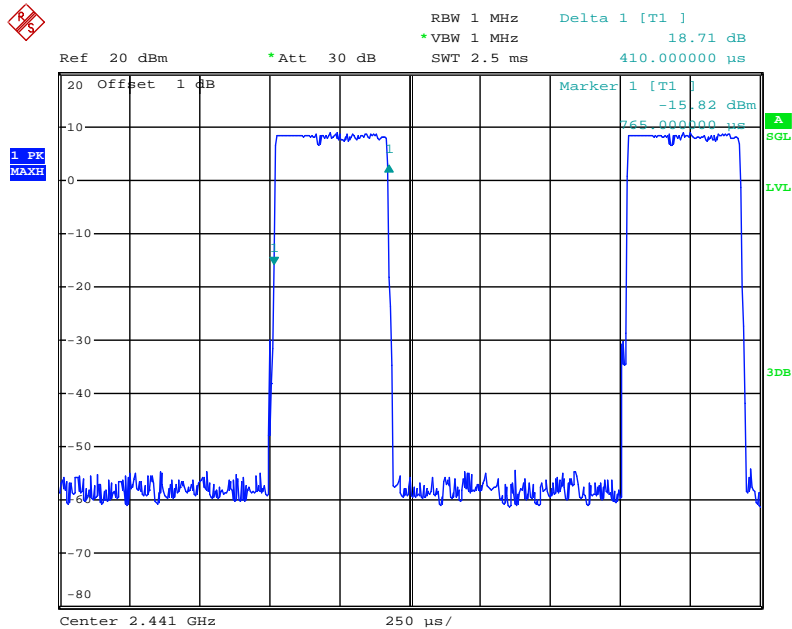


Date: 29.SEP.2010 15:00:59

3DH5 Dwell Time Plot on Channel 78 / 2480 MHz

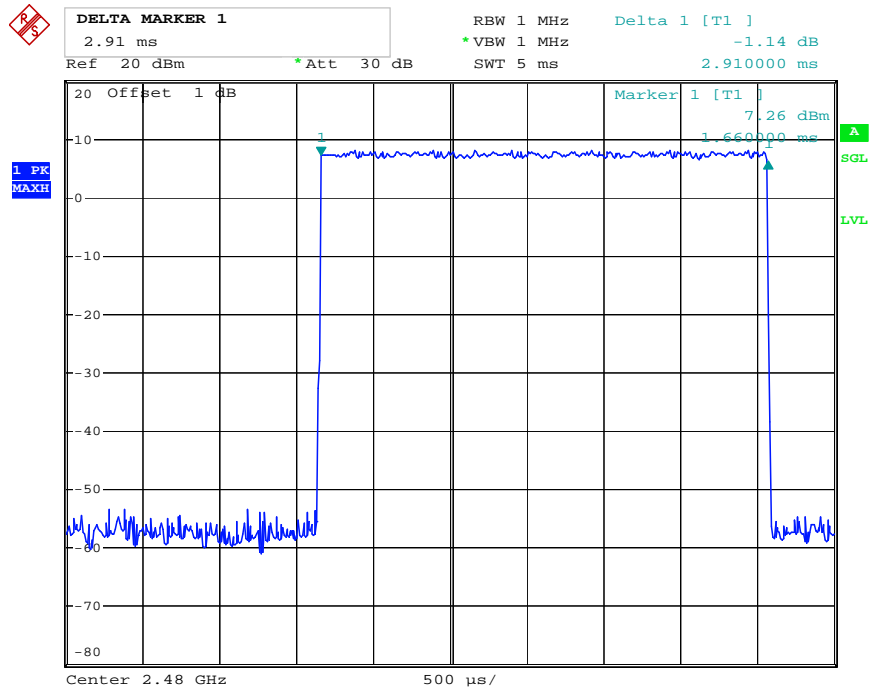


Date: 29.SEP.2010 13:09:01

3DH3 Dwell Time Plot on Channel 78 / 2480 MHz

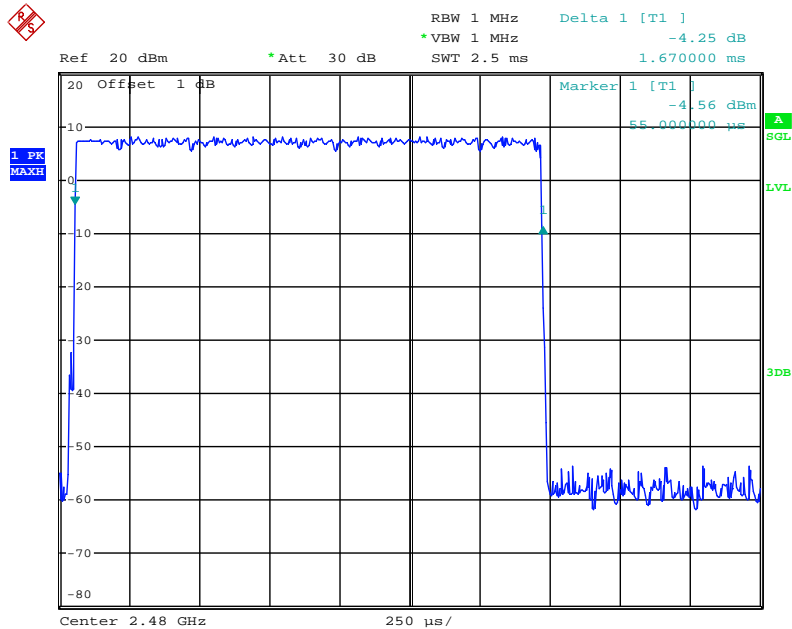

Date: 29.SEP.2010 15:03:36


3DH1 Dwell Time Plot on Channel 78 / 2480 MHz

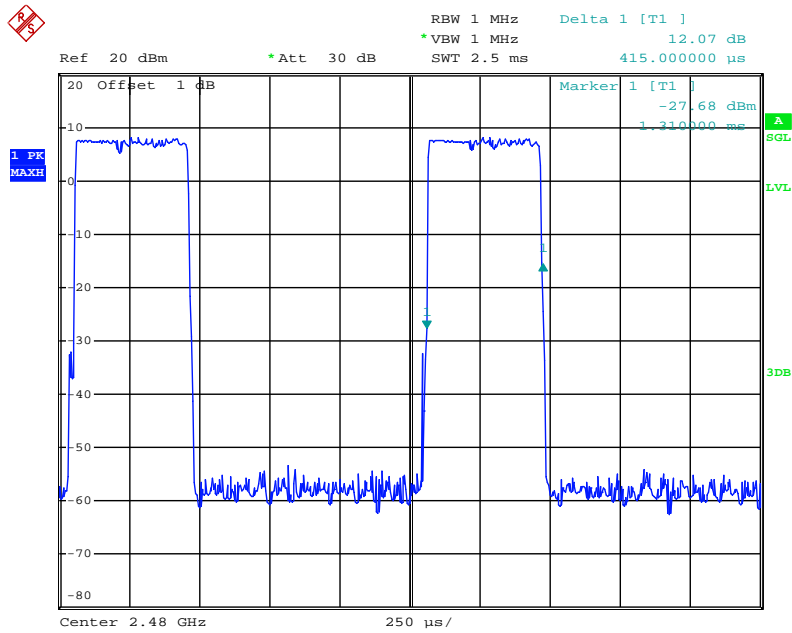

Date: 29.SEP.2010 15:01:58


<For Main Source – EUT 2 (Mode 2 with PIFA Antenna)>:

3DH5 Dwell Time Plot on Channel 0 / 2402 MHz

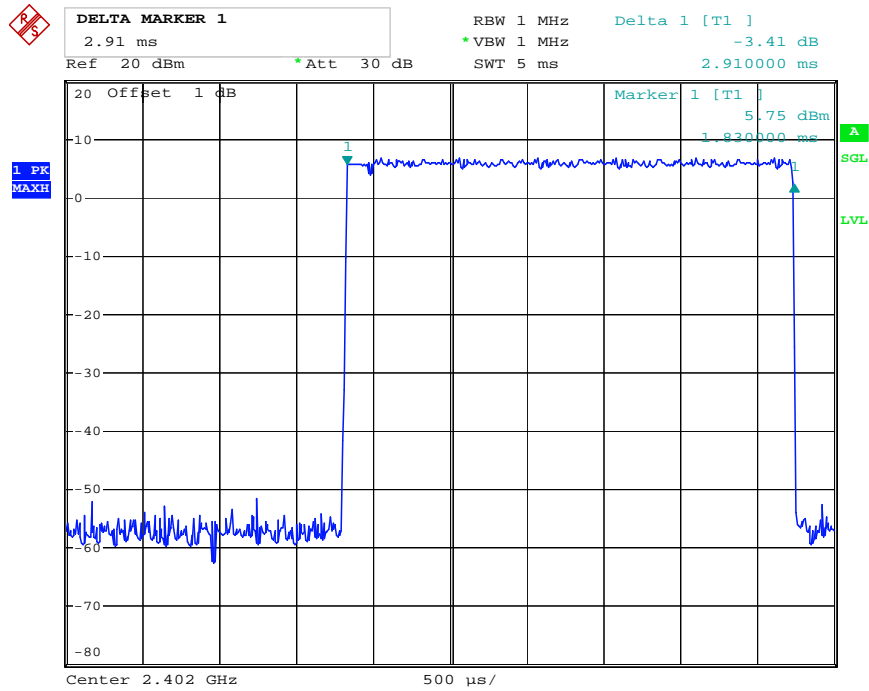


Date: 29.SEP.2010 13:07:22

3DH3 Dwell Time Plot on Channel 0 / 2402 MHz

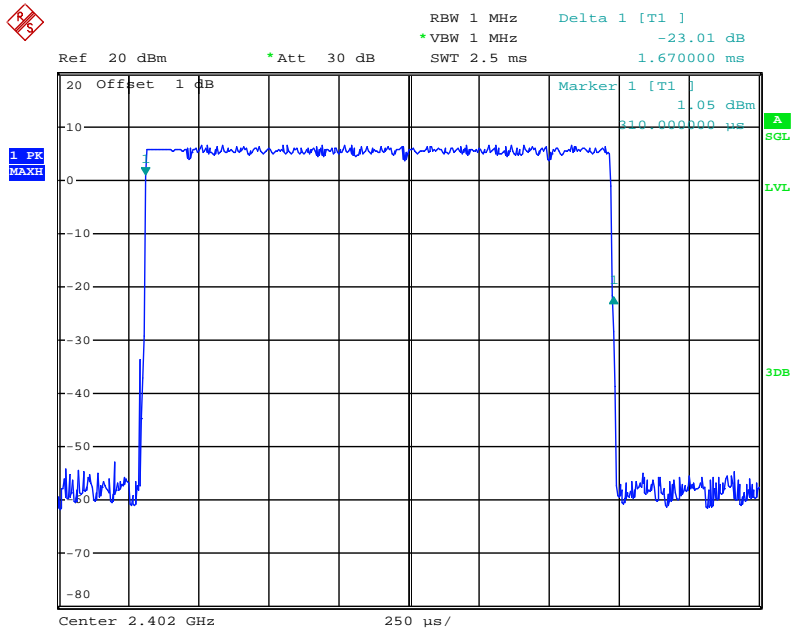


Date: 29.SEP.2010 15:05:29

3DH1 Dwell Time Plot on Channel 0 / 2402 MHz

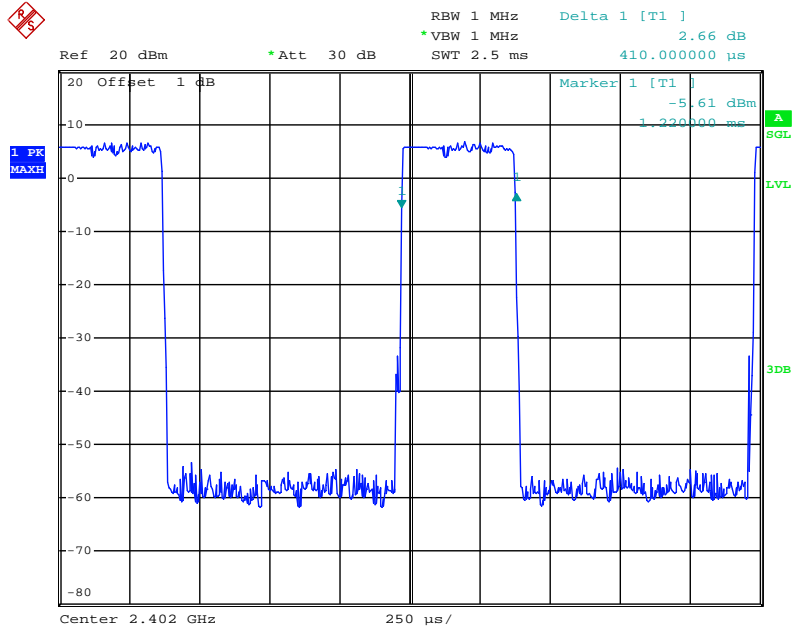


Date: 29.SEP.2010 15:00:10

3DH5 Dwell Time Plot on Channel 39 / 2441 MHz

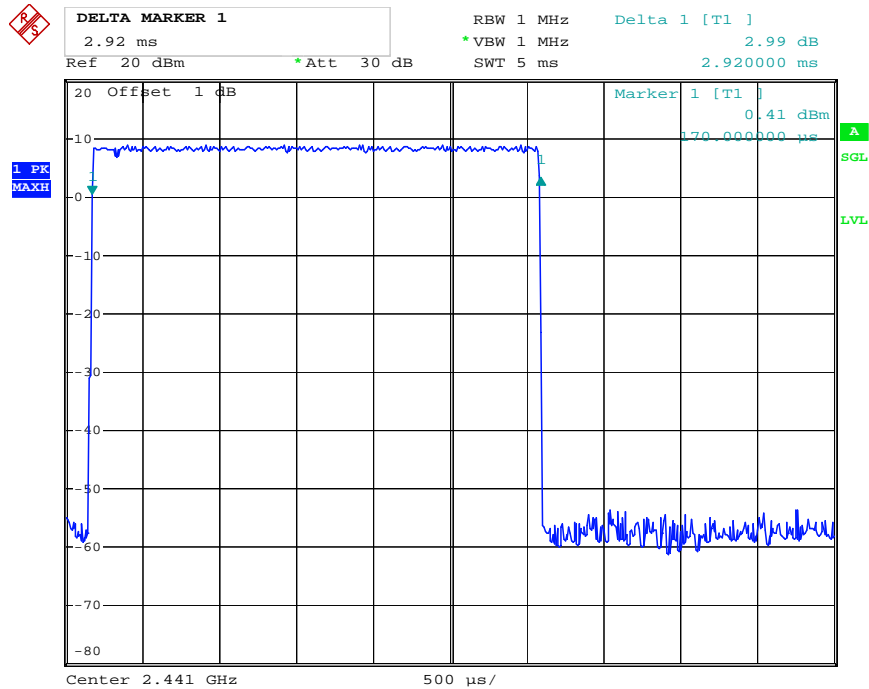


Date: 29.SEP.2010 13:08:26

3DH3 Dwell Time Plot on Channel 39 / 2441 MHz

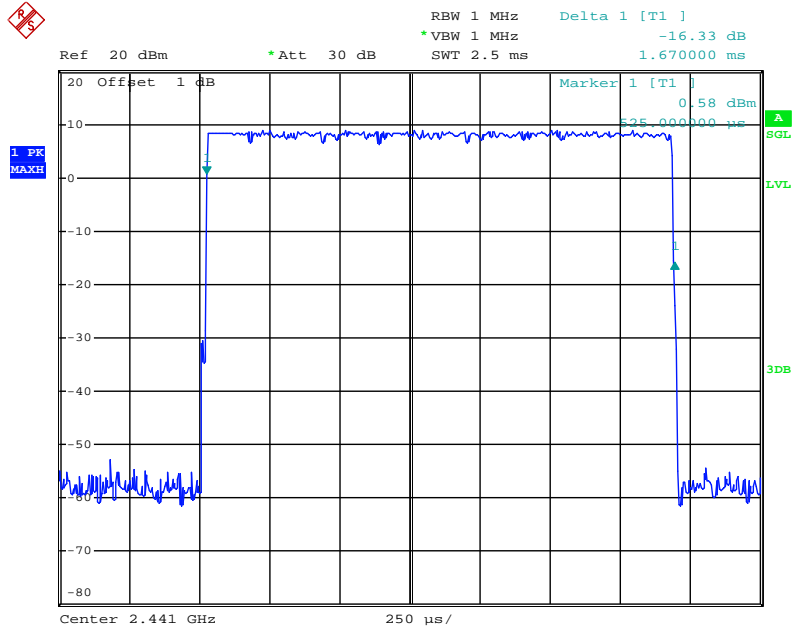


Date: 29.SEP.2010 15:04:32

3DH1 Dwell Time Plot on Channel 39 / 2441 MHz

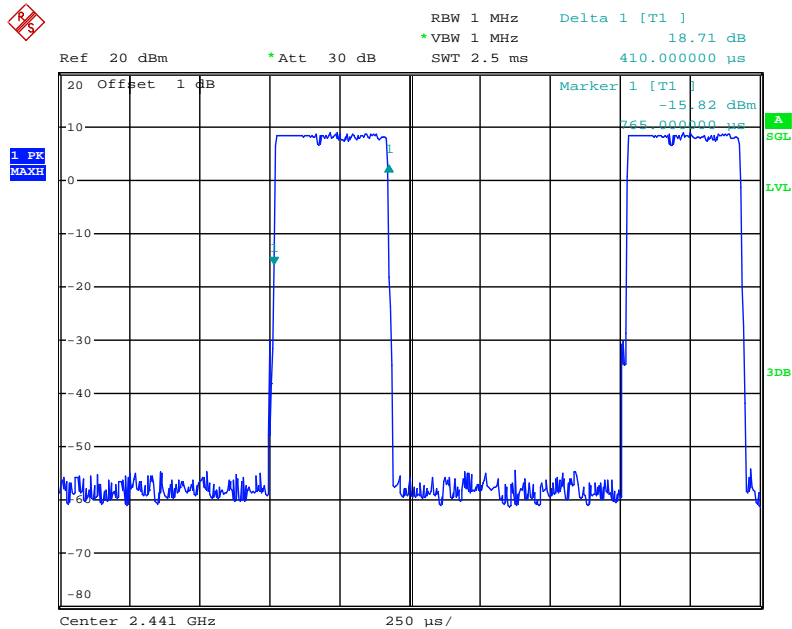


Date: 29.SEP.2010 15:00:59

3DH5 Dwell Time Plot on Channel 78 / 2480 MHz

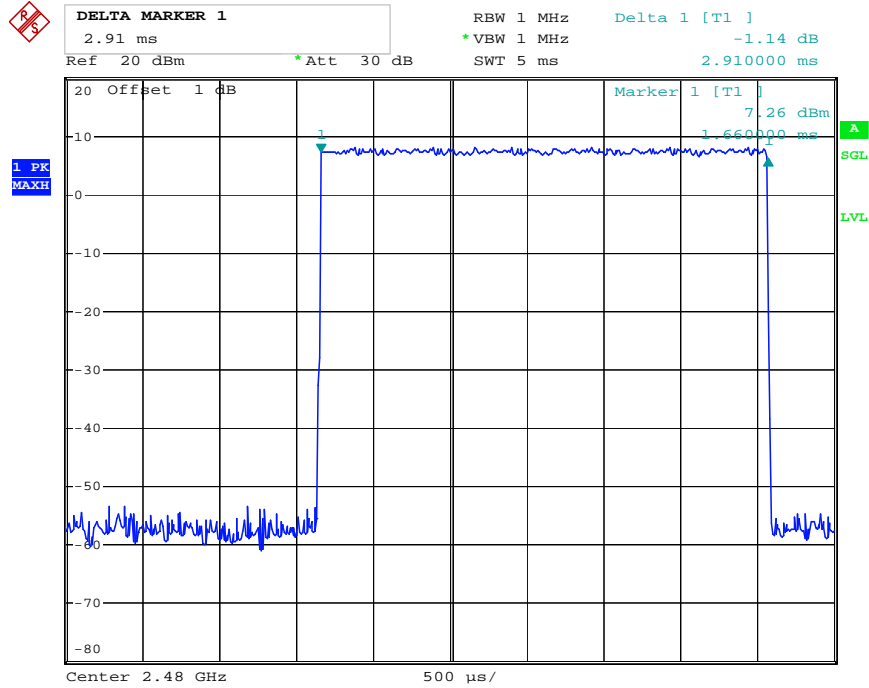


Date: 29.SEP.2010 13:09:01

3DH3 Dwell Time Plot on Channel 78 / 2480 MHz

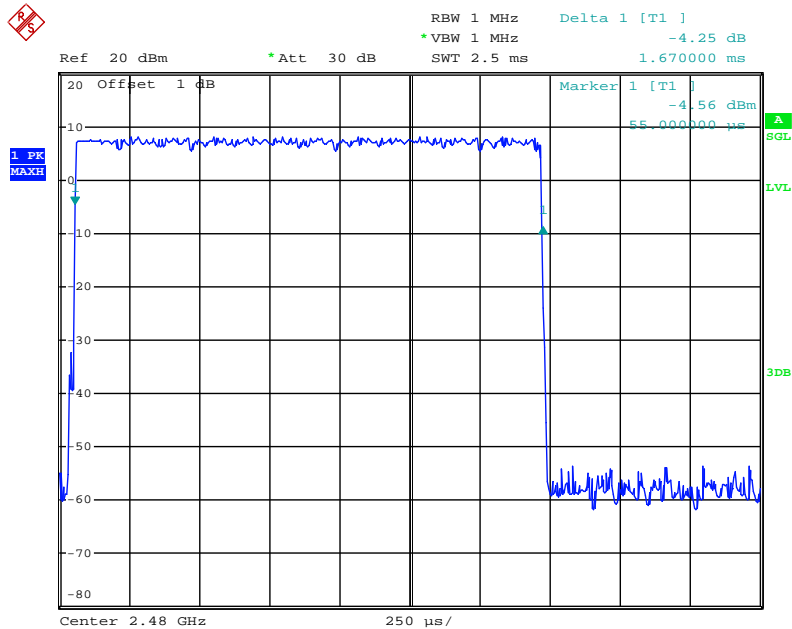

Date: 29.SEP.2010 15:03:36


3DH1 Dwell Time Plot on Channel 78 / 2480 MHz

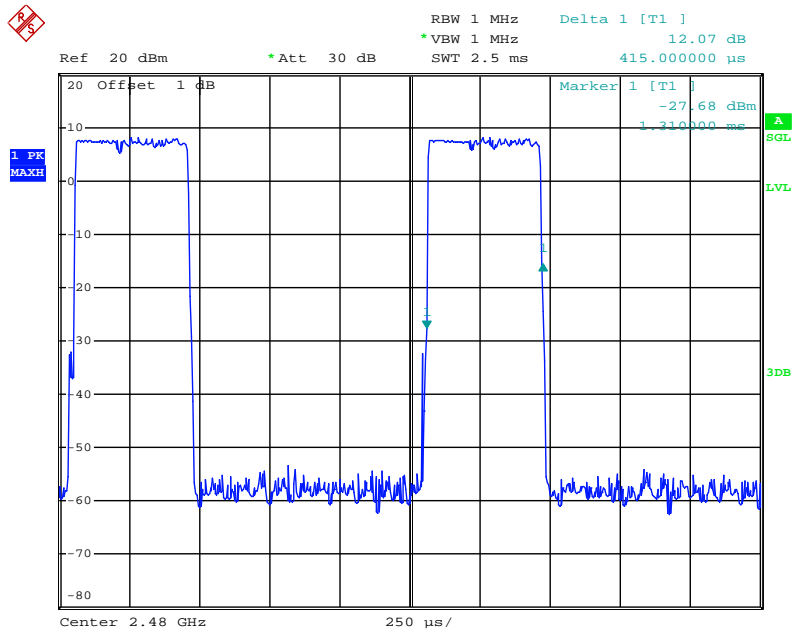

Date: 29.SEP.2010 15:01:58


<For Second Source – EUT 2 (Mode 1 with Dipole Antenna)>:

3DH5 Dwell Time Plot on Channel 0 / 2402 MHz

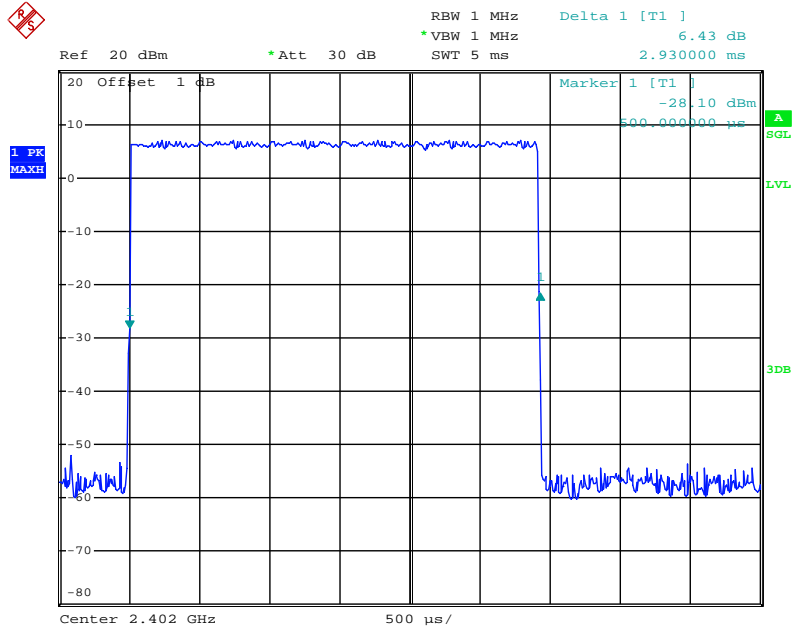


Date: 29.SEP.2010 14:22:27

3DH3 Dwell Time Plot on Channel 0 / 2402 MHz

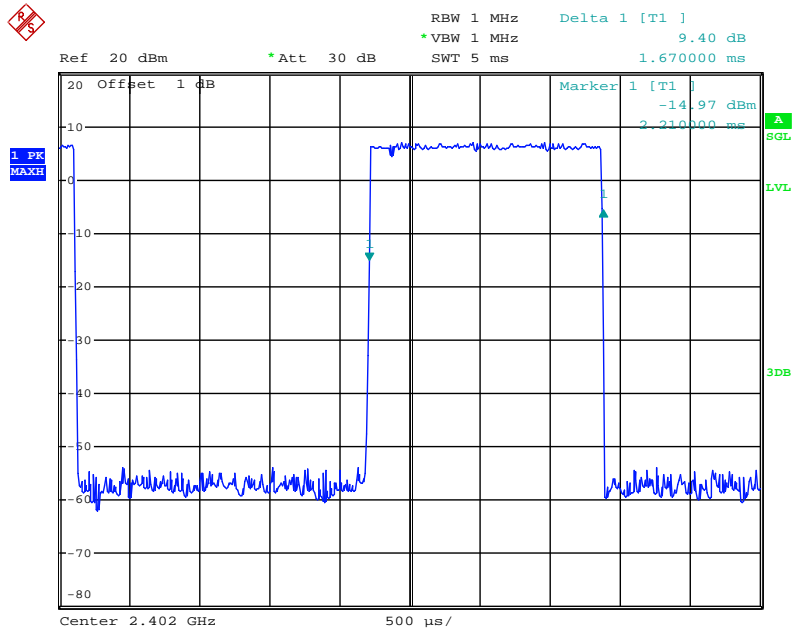


Date: 29.SEP.2010 14:28:13

3DH1 Dwell Time Plot on Channel 0 / 2402 MHz

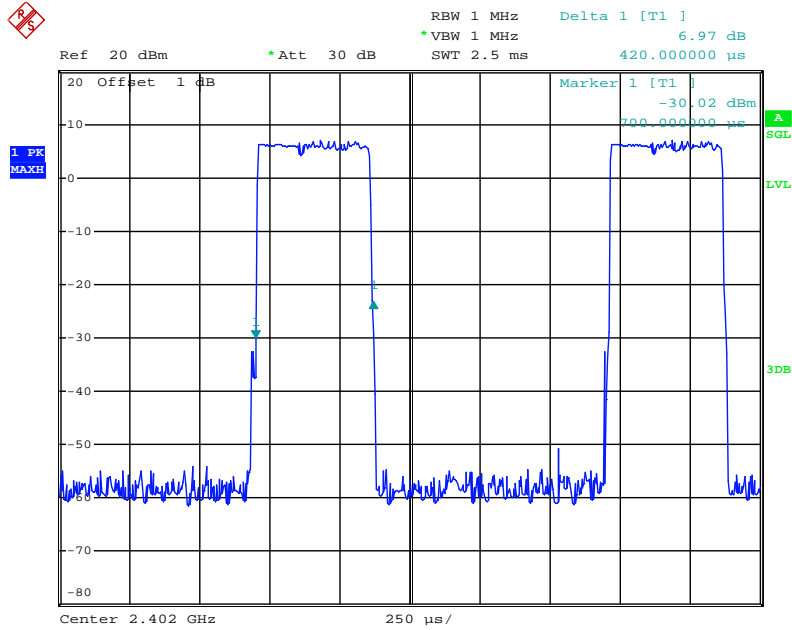


Date: 29.SEP.2010 14:35:00

3DH5 Dwell Time Plot on Channel 39 / 2441 MHz

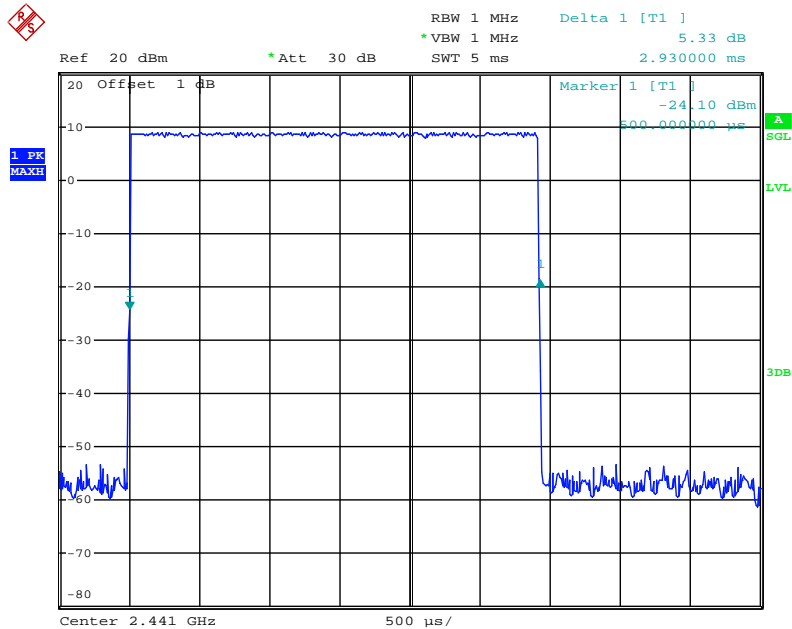


Date: 29.SEP.2010 14:21:44

3DH3 Dwell Time Plot on Channel 39 / 2441 MHz

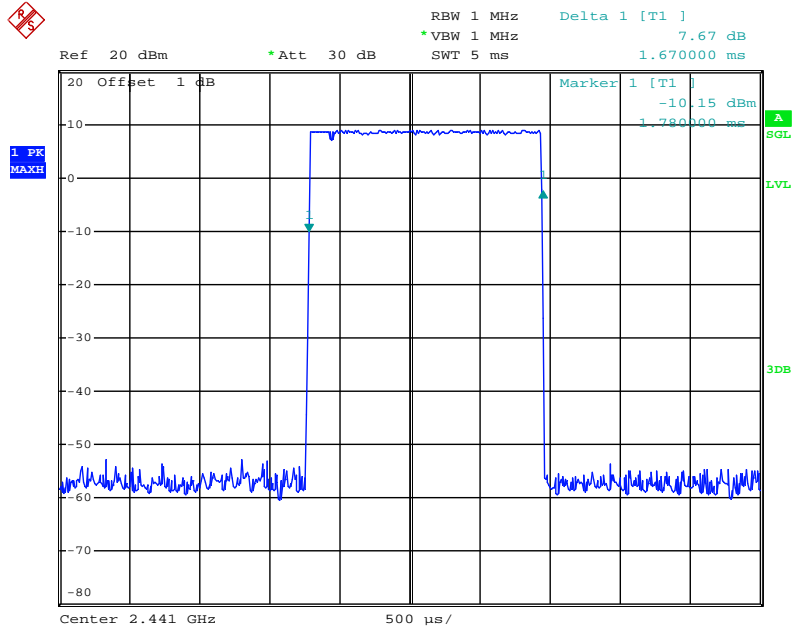


Date: 29.SEP.2010 14:29:15

3DH1 Dwell Time Plot on Channel 39 / 2441 MHz

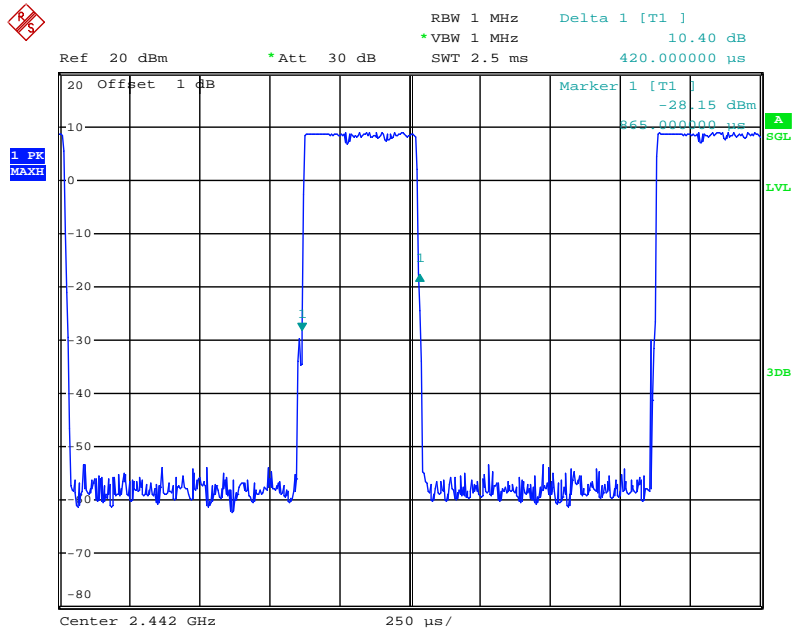


Date: 29.SEP.2010 14:33:55

3DH5 Dwell Time Plot on Channel 78 / 2480 MHz

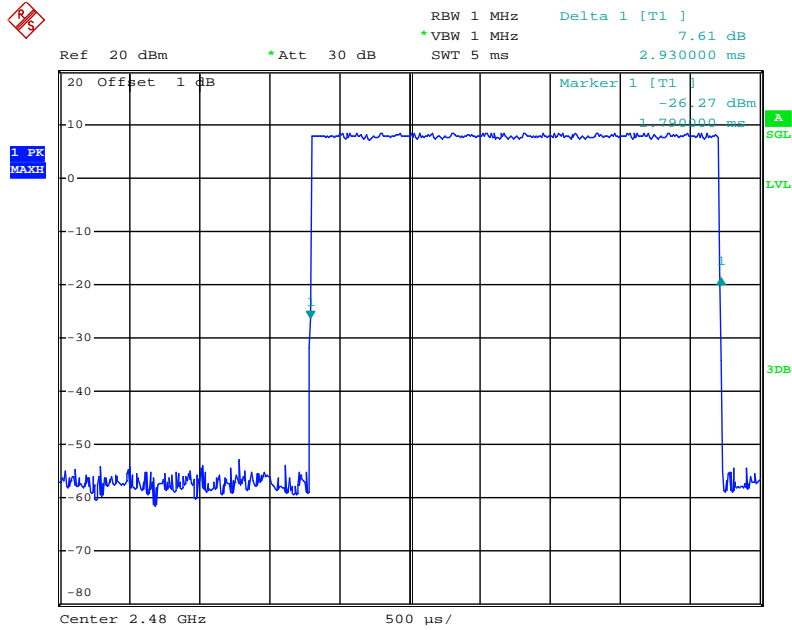


Date: 29.SEP.2010 14:20:41

3DH3 Dwell Time Plot on Channel 78 / 2480 MHz

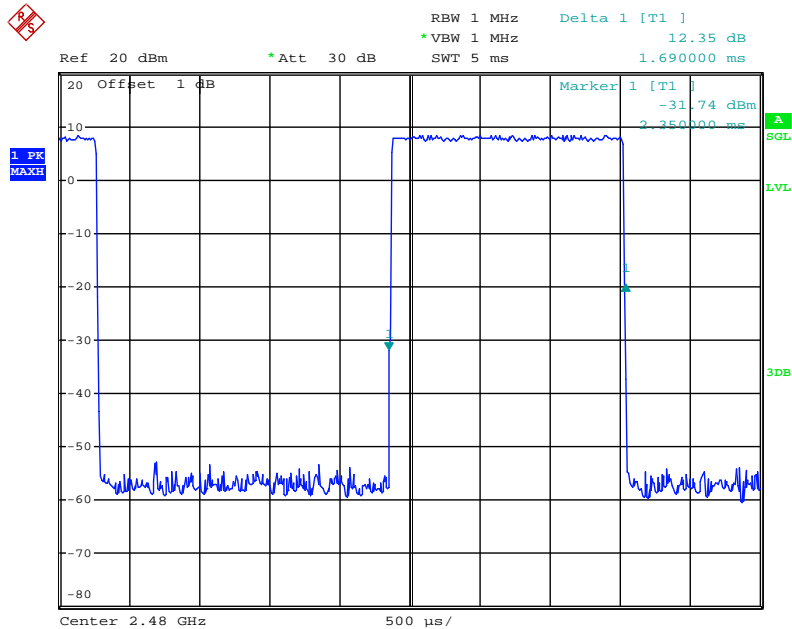

Date: 29.SEP.2010 14:30:38


3DH1 Dwell Time Plot on Channel 78 / 2480 MHz

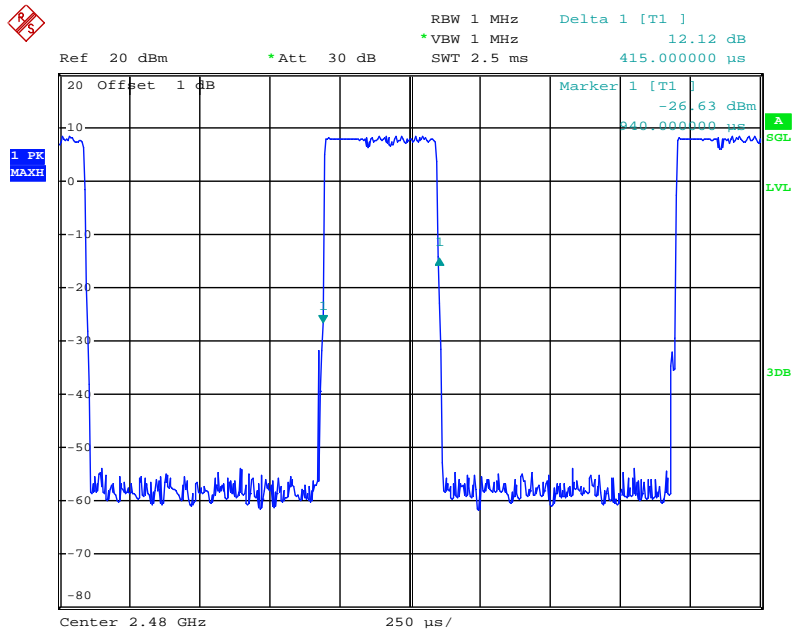

Date: 29.SEP.2010 14:33:18


<For Second Source – EUT 2 (Mode 2 with PIFA Antenna)>:

3DH5 Dwell Time Plot on Channel 0 / 2402 MHz

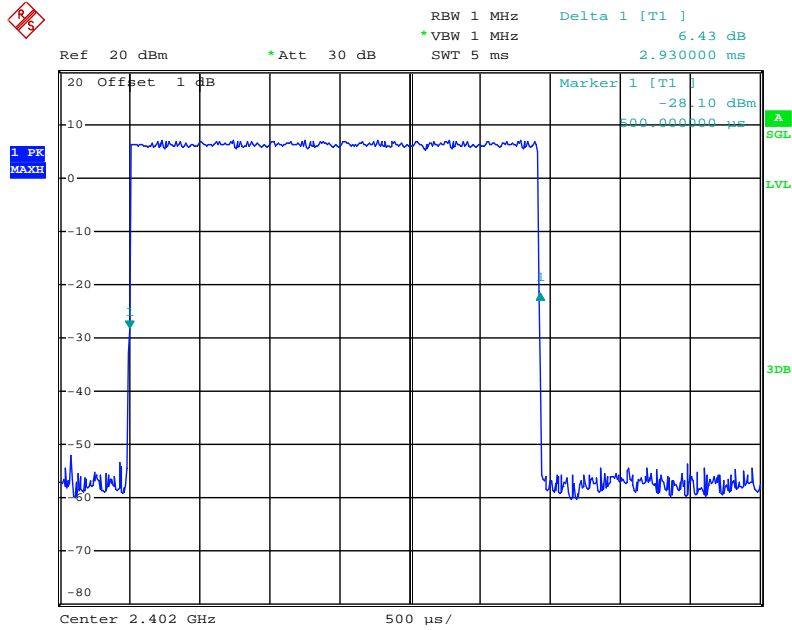


Date: 29.SEP.2010 14:22:27

3DH3 Dwell Time Plot on Channel 0 / 2402 MHz

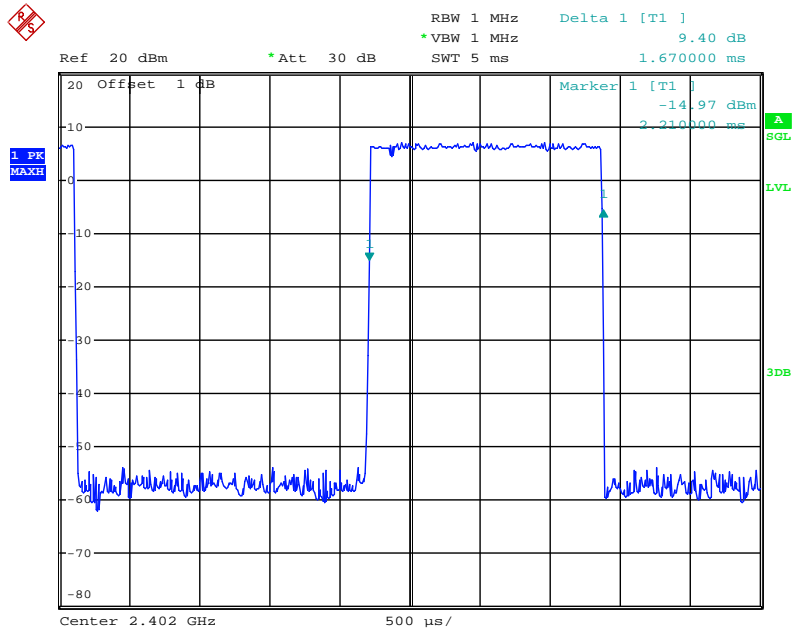


Date: 29.SEP.2010 14:28:13

3DH1 Dwell Time Plot on Channel 0 / 2402 MHz

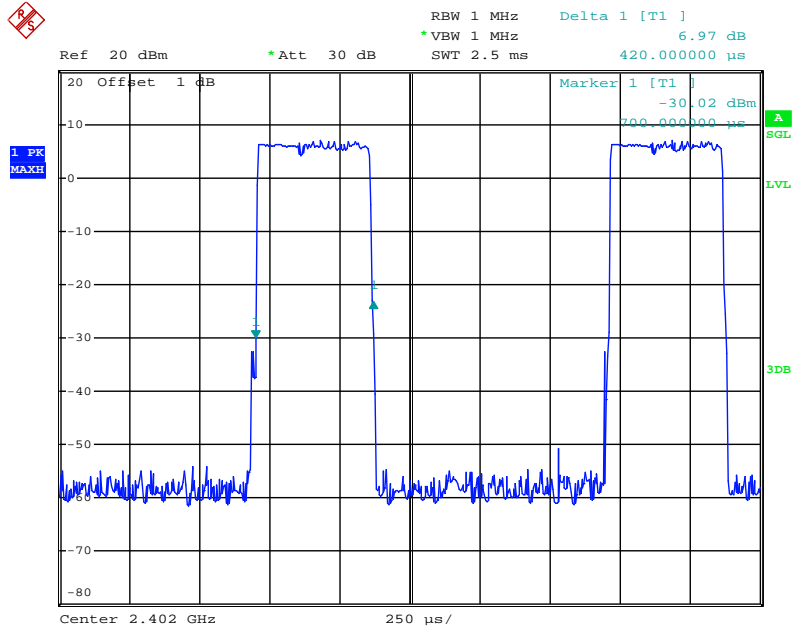


Date: 29.SEP.2010 14:35:00

3DH5 Dwell Time Plot on Channel 39 / 2441 MHz

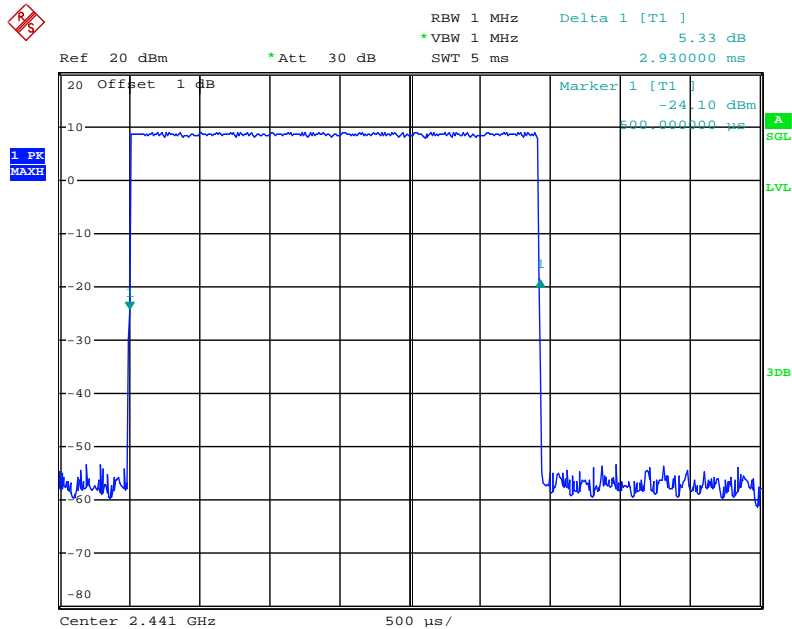


Date: 29.SEP.2010 14:21:44

3DH3 Dwell Time Plot on Channel 39 / 2441 MHz

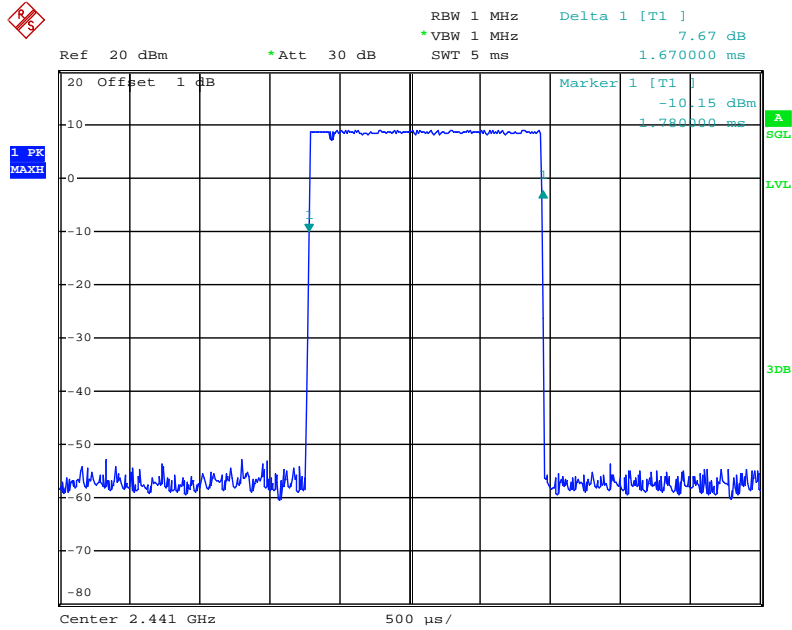


Date: 29.SEP.2010 14:29:15

3DH1 Dwell Time Plot on Channel 39 / 2441 MHz

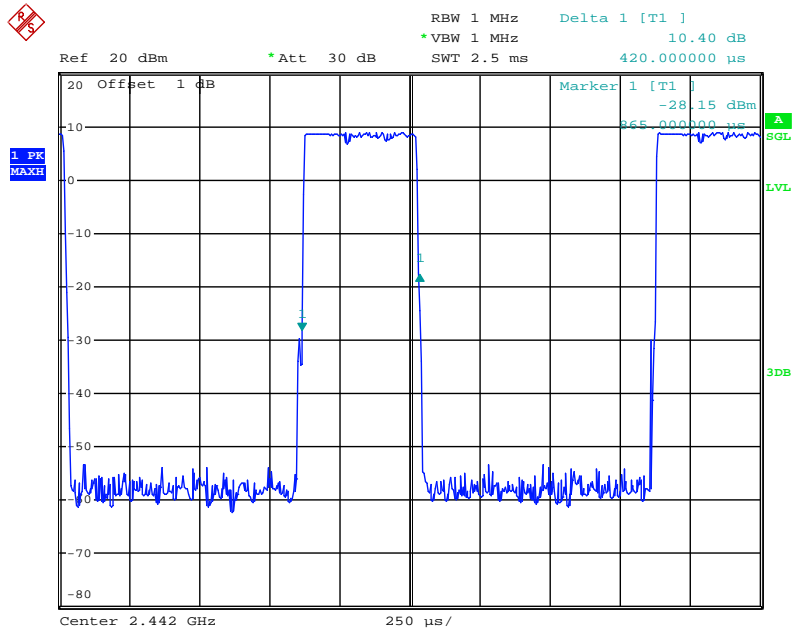


Date: 29.SEP.2010 14:33:55

3DH5 Dwell Time Plot on Channel 78 / 2480 MHz

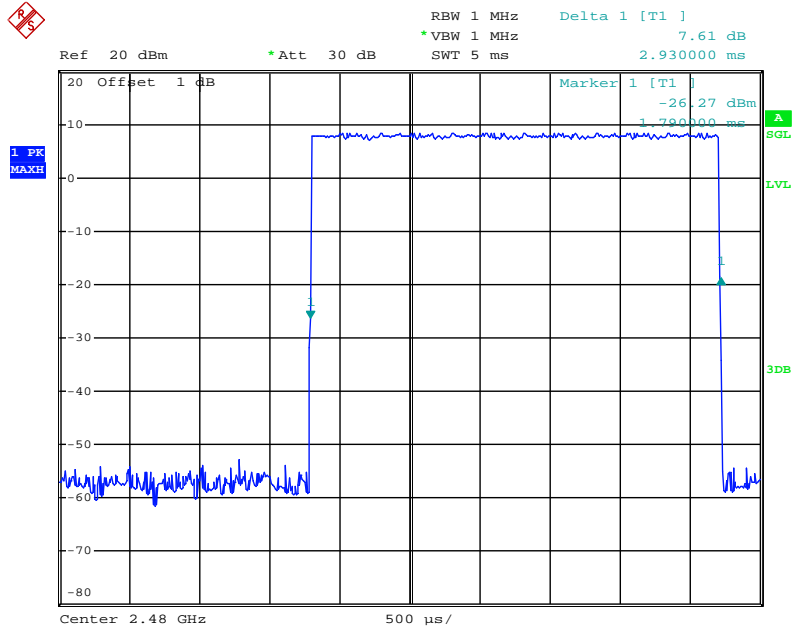


Date: 29.SEP.2010 14:20:41

3DH3 Dwell Time Plot on Channel 78 / 2480 MHz

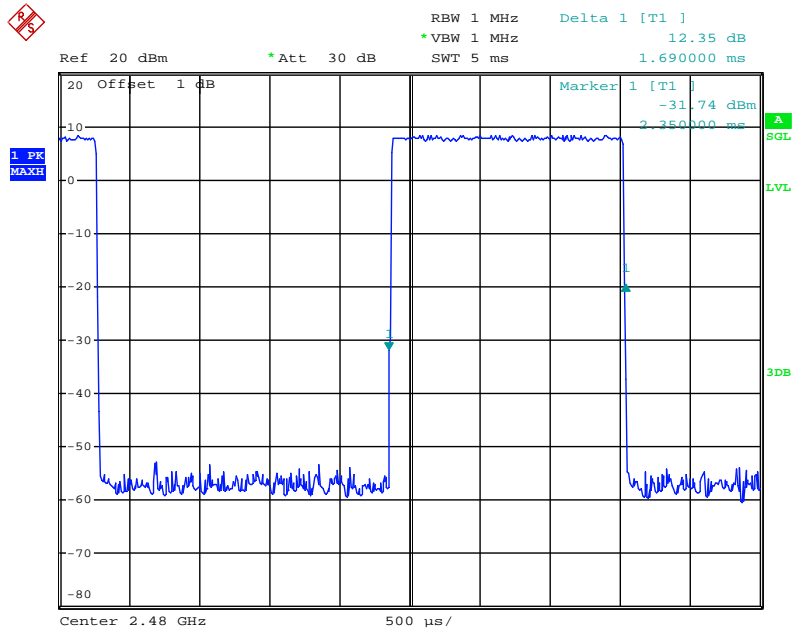

Date: 29.SEP.2010 14:30:38

3DH1 Dwell Time Plot on Channel 78 / 2480 MHz

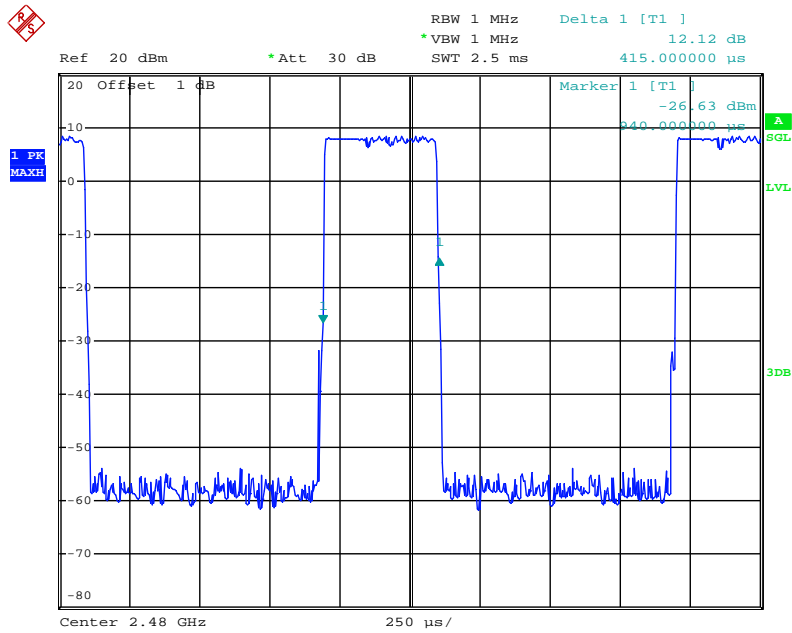

Date: 29.SEP.2010 14:33:18

4.6. Radiated Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 30MHz

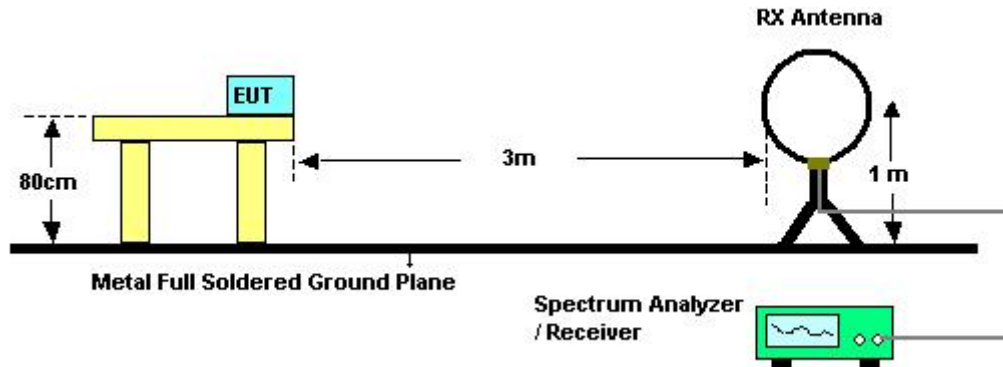

For radiated emissions above 30MHz

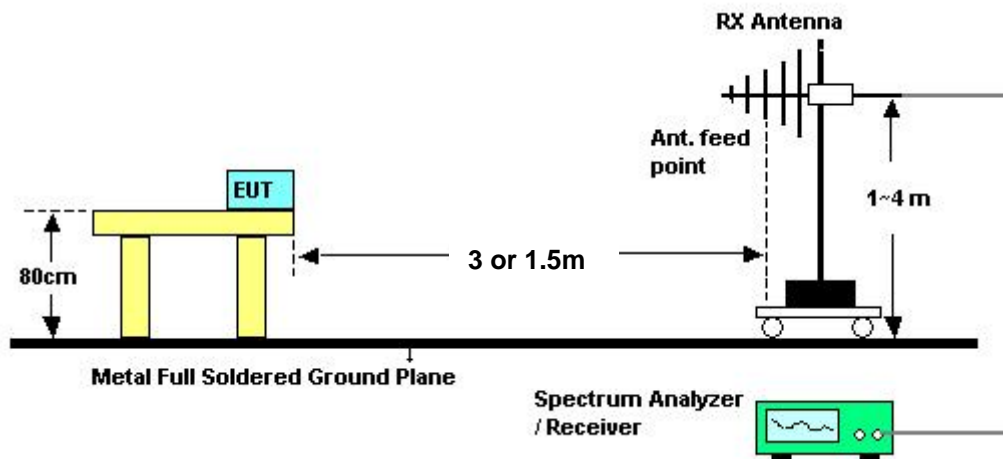

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)

<For Main Source – EUT 2 (Mode 1 with Dipole Antenna)>:


Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Normal Link

Horizontal

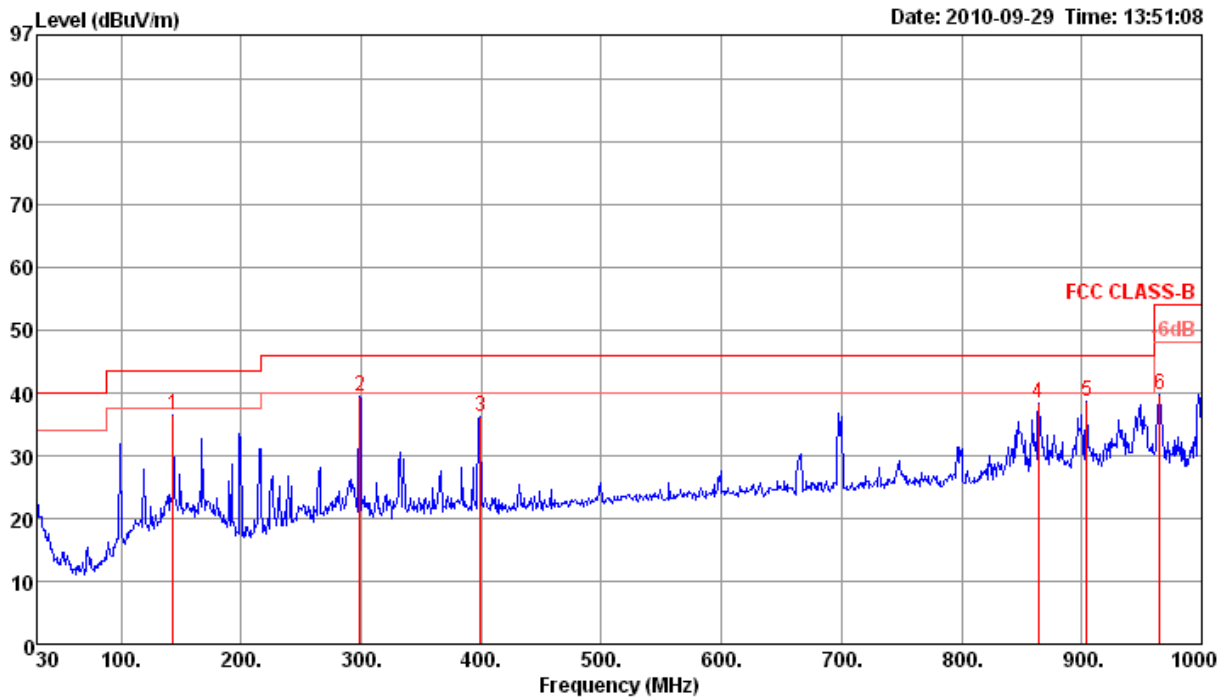

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	143.49	36.54	43.50	-6.96	50.33	1.42	27.38	12.17	0	100	Peak	HORIZONTAL
2	298.69	39.50	46.00	-6.50	50.95	2.10	26.90	13.35	0	100	Peak	HORIZONTAL
3	399.57	36.30	46.00	-9.70	45.54	2.30	27.60	16.06	0	100	Peak	HORIZONTAL
4	864.20	38.43	46.00	-7.57	42.18	3.46	27.47	20.26	0	100	Peak	HORIZONTAL
5	903.97	38.75	46.00	-7.25	41.97	3.60	27.38	20.56	0	100	Peak	HORIZONTAL
6	965.08	39.67	54.00	-14.33	42.16	3.63	27.14	21.02	0	100	Peak	HORIZONTAL

Vertical

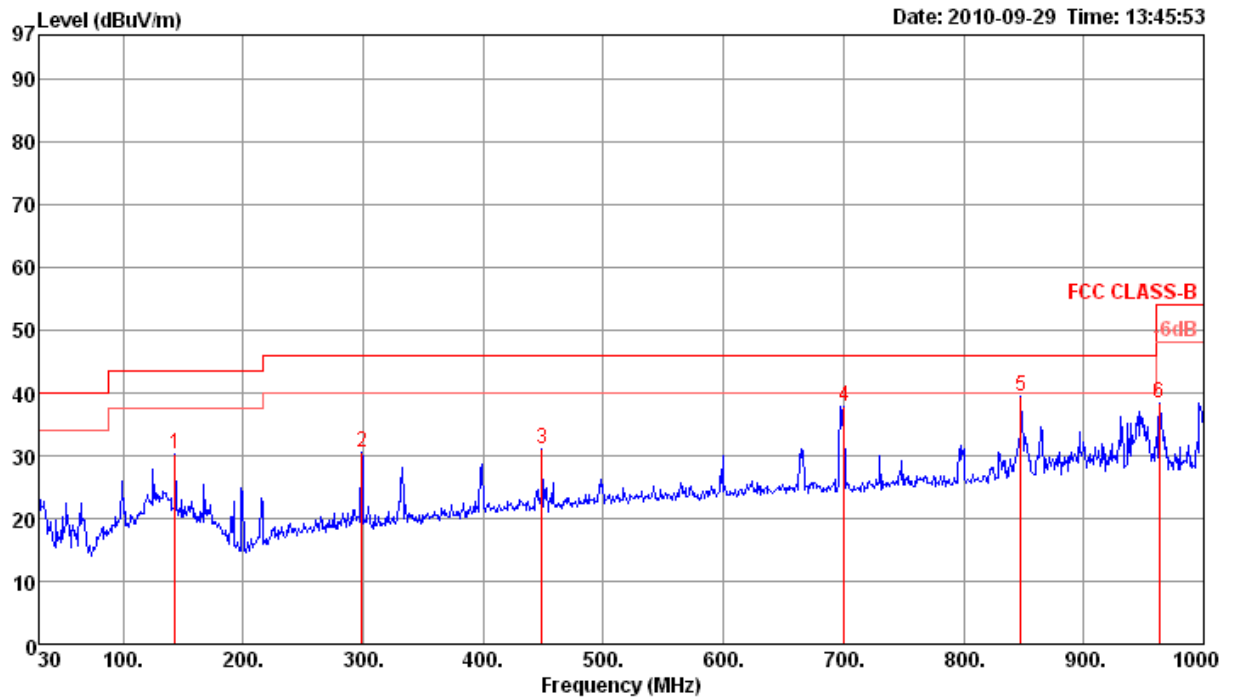

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	143.49	30.28	43.50	-13.22	44.07	1.42	27.38	12.17	0	400	Peak	VERTICAL
2	298.69	30.51	46.00	-15.49	41.96	2.10	26.90	13.35	0	400	Peak	VERTICAL
3	449.04	31.13	46.00	-14.87	39.56	2.59	27.85	16.83	0	400	Peak	VERTICAL
4	700.27	37.85	46.00	-8.15	43.45	3.30	27.99	19.09	0	400	Peak	VERTICAL
5	847.71	39.55	46.00	-6.45	43.53	3.40	27.51	20.13	0	400	Peak	VERTICAL
6	963.14	38.38	54.00	-15.62	40.89	3.63	27.15	21.01	0	400	Peak	VERTICAL

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Main Source – EUT 2 (Mode 2 with PIFA Antenna)>:


Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Normal Link

Horizontal

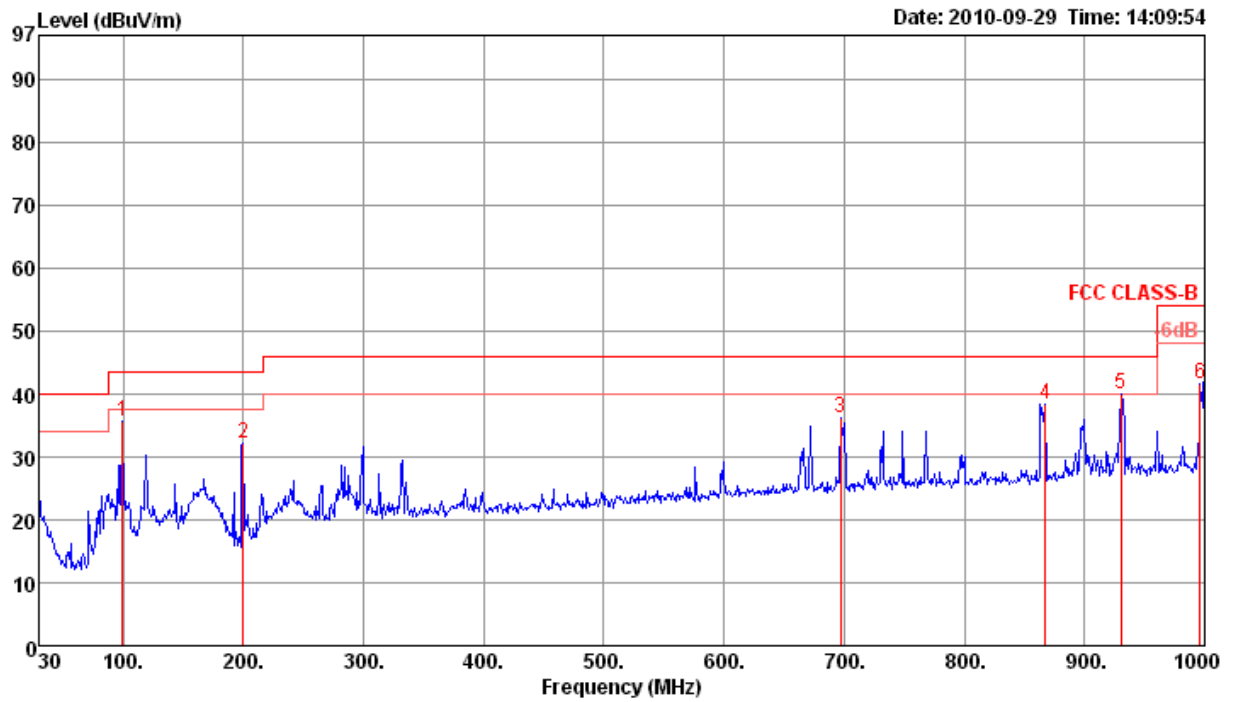

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	99.84	35.64	43.50	-7.86	51.05	1.20	27.60	10.99	0	100	Peak	HORIZONTAL
2	199.75	32.02	43.50	-11.48	48.37	1.70	27.10	9.05	0	100	Peak	HORIZONTAL
3	697.36	36.22	46.00	-9.78	41.83	3.31	28.00	19.08	0	100	Peak	HORIZONTAL
4	867.11	38.40	46.00	-7.60	42.12	3.47	27.47	20.28	0	100	Peak	HORIZONTAL
5	930.16	39.93	46.00	-6.07	42.85	3.60	27.28	20.76	0	100	Peak	HORIZONTAL
6	996.12	41.61	54.00	-12.39	43.68	3.69	27.02	21.26	0	100	Peak	HORIZONTAL

Vertical

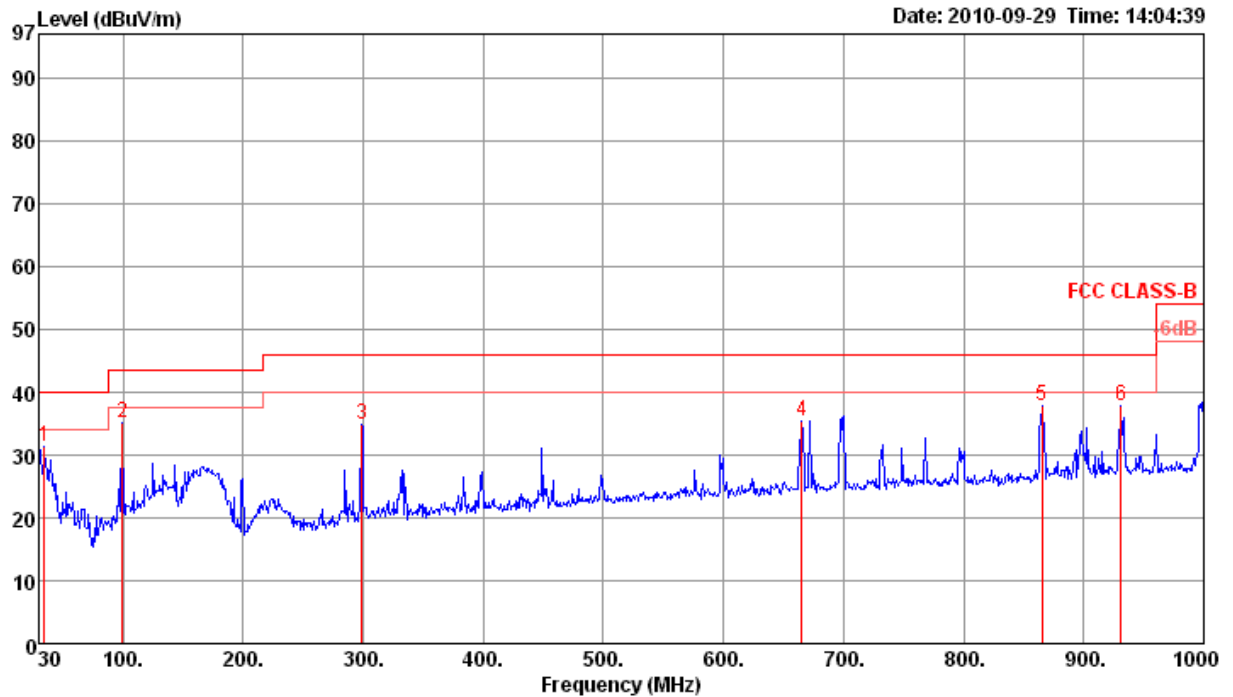

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	34.85	31.29	40.00	-8.71	42.51	0.50	27.80	16.08	0	400	Peak	VERTICAL
2	99.84	35.12	43.50	-8.38	50.53	1.20	27.60	10.99	0	400	Peak	VERTICAL
3	298.69	34.94	46.00	-11.06	46.39	2.10	26.90	13.35	0	400	Peak	VERTICAL
4	665.35	35.44	46.00	-10.56	41.05	3.44	28.03	18.98	0	400	Peak	VERTICAL
5 p	865.17	37.95	46.00	-8.05	41.70	3.46	27.47	20.26	0	400	Peak	VERTICAL
6	931.13	37.91	46.00	-8.09	40.81	3.60	27.27	20.77	0	400	Peak	VERTICAL

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Second Source – EUT 2 (Mode 1 with Dipole Antenna)>:


Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Normal Link

Horizontal

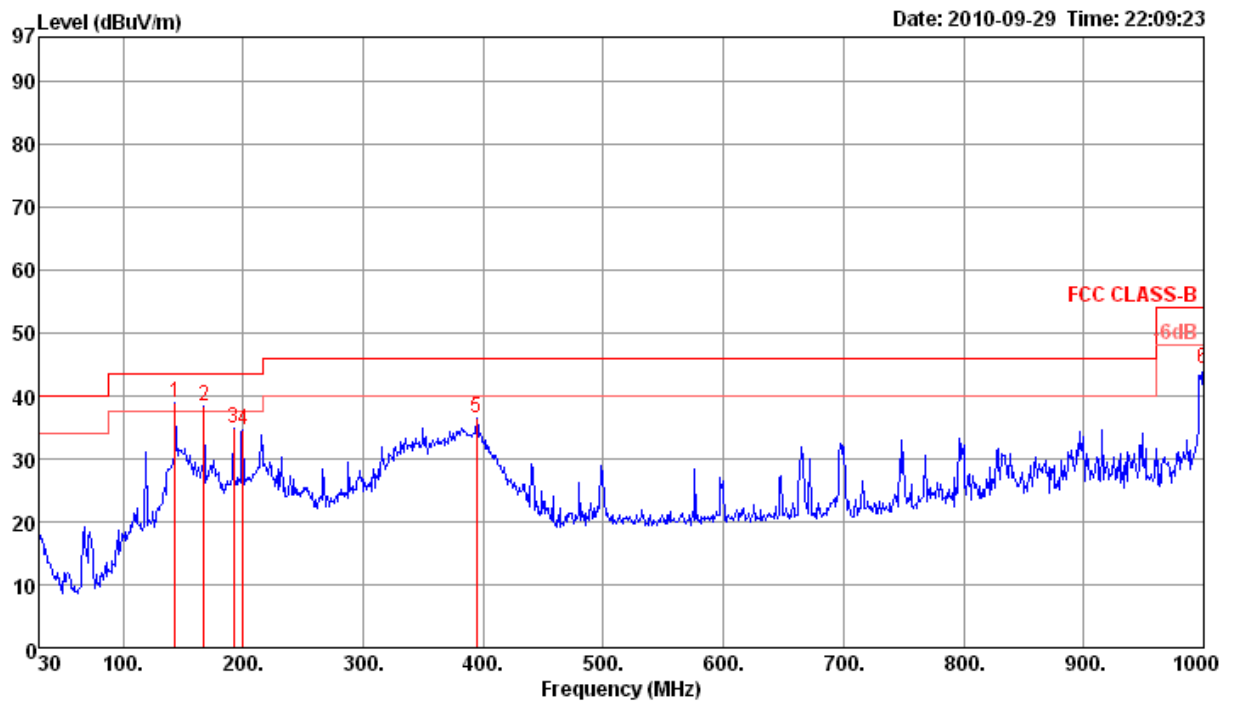

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	143.49	38.86	43.50	-4.64	52.65	1.42	27.38	12.17	0	100	Peak	HORIZONTAL
2	167.74	38.41	43.50	-5.09	51.52	1.54	27.26	12.61	0	100	Peak	HORIZONTAL
3	191.99	34.81	43.50	-8.69	49.60	1.66	27.14	10.69	0	100	Peak	HORIZONTAL
4	199.75	34.53	43.50	-8.97	50.88	1.70	27.10	9.05	0	100	Peak	HORIZONTAL
5	394.72	36.38	46.00	-9.62	45.72	2.29	27.56	15.93	0	100	Peak	HORIZONTAL
6	1000.00	44.19	54.00	-9.81	46.20	3.70	27.00	21.29	0	100	Peak	HORIZONTAL

Vertical

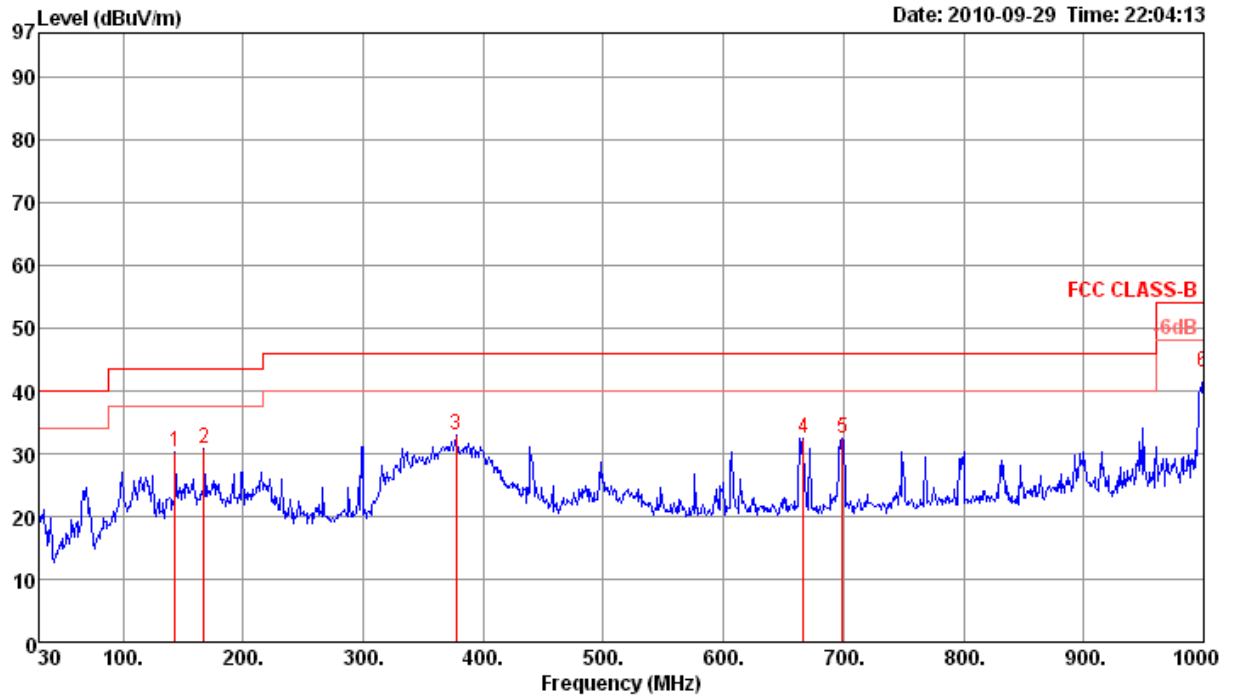

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	143.49	30.27	43.50	-13.23	44.06	1.42	27.38	12.17	0	400	Peak	VERTICAL
2	167.74	30.71	43.50	-12.79	43.82	1.54	27.26	12.61	0	400	Peak	VERTICAL
3	377.26	33.01	46.00	-12.99	42.74	2.25	27.44	15.46	0	400	Peak	VERTICAL
4	666.32	32.55	46.00	-13.45	38.17	3.43	28.03	18.98	0	400	Peak	VERTICAL
5	699.30	32.47	46.00	-13.53	38.08	3.30	28.00	19.09	0	400	Peak	VERTICAL
6 p	1000.00	42.85	54.00	-11.15	44.86	3.70	27.00	21.29	0	400	Peak	VERTICAL

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Second Source – EUT 2 (Mode 2 with PIFA Antenna)>:


Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Normal Link

Horizontal

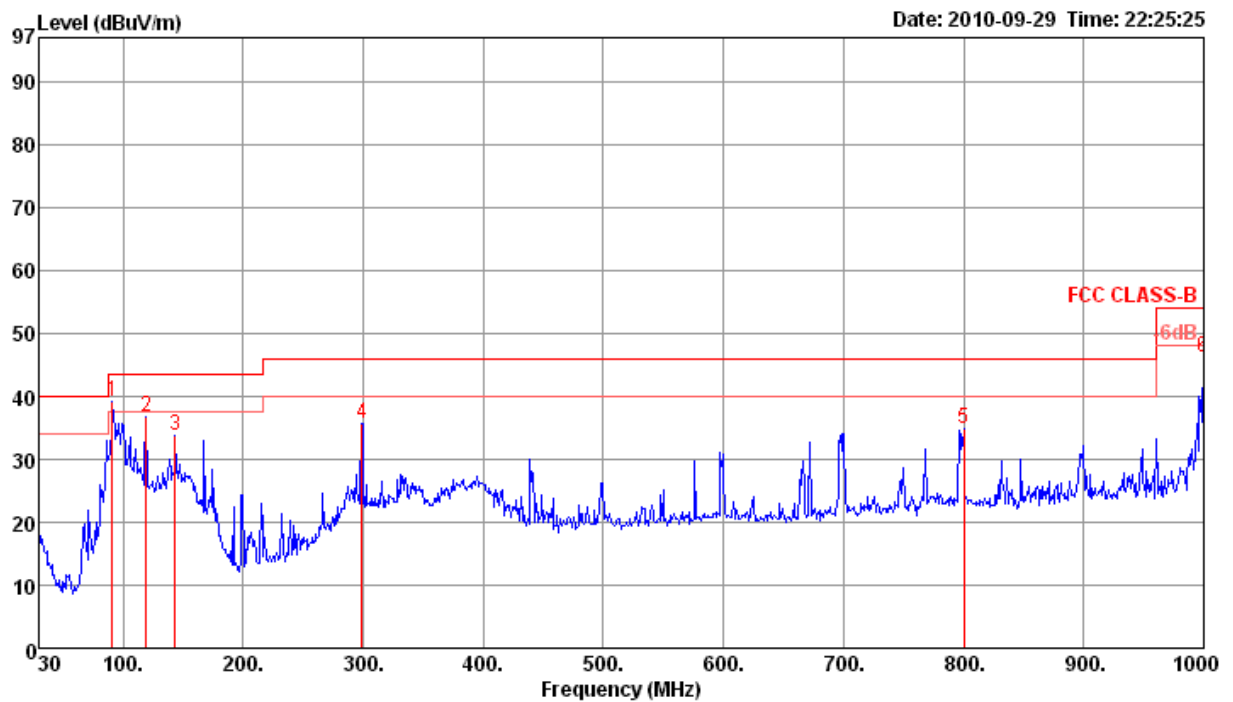

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	91.11	39.22	43.50	-4.28	56.58	1.10	27.64	9.18	0	100	Peak	HORIZONTAL
2	119.24	36.64	43.50	-6.86	50.48	1.20	27.50	12.46	0	100	Peak	HORIZONTAL
3	143.49	33.85	43.50	-9.65	47.64	1.42	27.38	12.17	0	100	Peak	HORIZONTAL
4	298.69	35.63	46.00	-10.37	47.08	2.10	26.90	13.35	0	100	Peak	HORIZONTAL
5	800.18	34.74	46.00	-11.26	39.27	3.30	27.60	19.77	0	100	Peak	HORIZONTAL
6	1000.00	46.15	54.00	-7.85	48.16	3.70	27.00	21.29	0	100	Peak	HORIZONTAL

Vertical

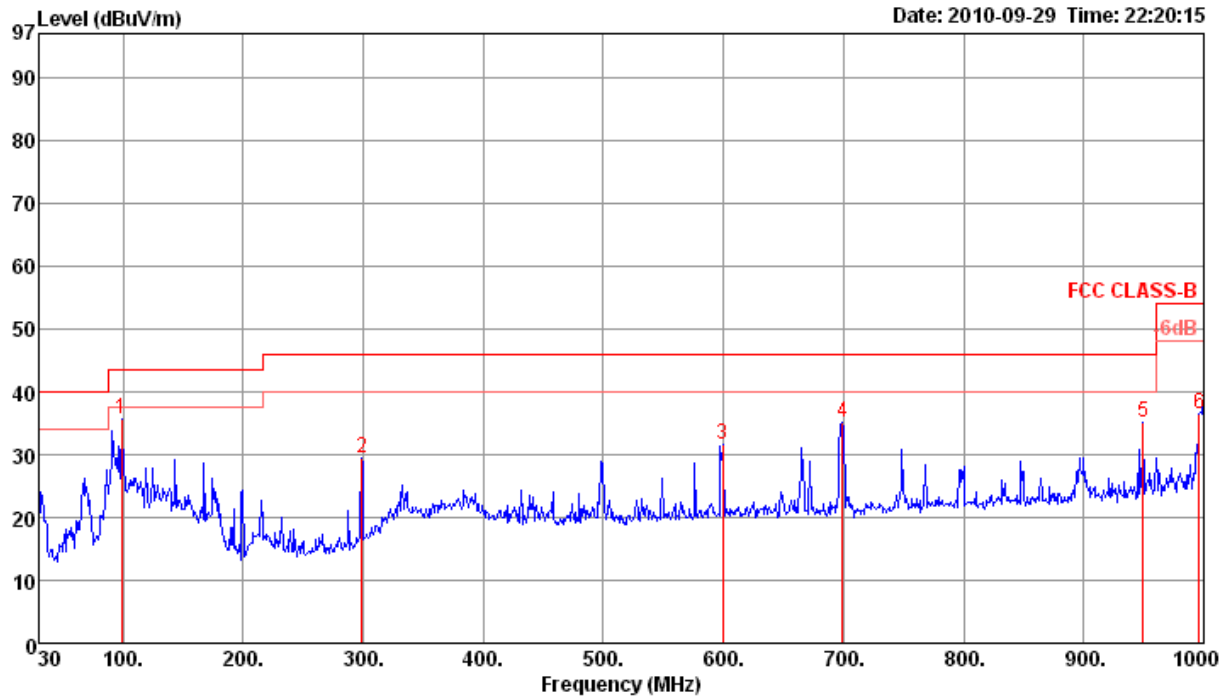

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	98.87	35.76	43.50	-7.74	51.40	1.18	27.61	10.79	0	400	Peak	VERTICAL
2	298.69	29.32	46.00	-16.68	40.77	2.10	26.90	13.35	0	400	Peak	VERTICAL
3	599.39	31.50	46.00	-14.50	37.94	2.90	28.10	18.76	0	400	Peak	VERTICAL
4	699.30	35.08	46.00	-10.92	40.69	3.30	28.00	19.09	0	400	Peak	VERTICAL
5	949.56	35.22	46.00	-10.78	37.91	3.60	27.20	20.91	0	400	Peak	VERTICAL
6	996.12	36.52	54.00	-17.48	38.59	3.69	27.02	21.26	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~10th Harmonic)

<For Main Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 0 / Mode 1
Test Date	Sep. 10, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4803.93	31.58	54.00	-22.42	29.19	4.23	35.20	33.36	247	100	Average	HORIZONTAL
2 p	4804.15	45.67	74.00	-28.33	43.28	4.23	35.20	33.36	247	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4803.86	49.66	74.00	-24.34	47.27	4.23	35.20	33.36	195	100	Peak	VERTICAL
2 a	4803.99	34.49	54.00	-19.51	32.10	4.23	35.20	33.36	195	100	Average	VERTICAL

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 1
Test Date	Sep. 10, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4882.07	33.09	54.00	-20.91	30.48	4.33	35.20	33.48	262	100	Average	HORIZONTAL
2 p	4882.43	47.37	74.00	-26.63	44.76	4.33	35.20	33.48	262	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4882.01	35.89	54.00	-18.11	33.28	4.33	35.20	33.48	172	100	Average	VERTICAL
2 p	4882.33	51.28	74.00	-22.72	48.67	4.33	35.20	33.48	172	100	Peak	VERTICAL

Temperature	23°C	Humidity	56%
Test Engineer	Satoshi Yang	Configurations	Channel 78 / Mode 1
Test Date	Sep. 10, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4959.63	46.26	74.00	-27.74	43.40	4.42	35.20	33.64	223	179	Peak	HORIZONTAL
2 a	4960.05	31.94	54.00	-22.06	29.08	4.42	35.20	33.64	223	179	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4959.97	33.09	54.00	-20.91	30.23	4.42	35.20	33.64	171	100	Average	VERTICAL
2 p	4960.32	47.00	74.00	-27.00	44.14	4.42	35.20	33.64	171	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Main Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 0 / Mode 2
Test Date	Sep. 28, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4804.00	34.76	54.00	-19.24	32.37	4.23	35.20	33.36	351	100	Average	HORIZONTAL
2 p	4804.36	50.15	74.00	-23.85	47.76	4.23	35.20	33.36	351	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4803.99	37.01	54.00	-16.99	34.62	4.23	35.20	33.36	316	189	Average	VERTICAL
2 p	4804.02	53.43	74.00	-20.57	51.04	4.23	35.20	33.36	316	189	Peak	VERTICAL

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 2
Test Date	Sep. 28, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4882.03	54.10	74.00	-19.90	51.49	4.33	35.20	33.48	218	153	Peak	HORIZONTAL
2 a	4882.03	37.85	54.00	-16.15	35.24	4.33	35.20	33.48	218	153	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4959.75	48.65	74.00	-25.35	45.79	4.42	35.20	33.64	270	100	Peak	VERTICAL
2 a	4960.03	33.90	54.00	-20.10	31.04	4.42	35.20	33.64	270	100	Average	VERTICAL

Temperature	23°C	Humidity	56%
Test Engineer	Satoshi Yang	Configurations	Channel 78 / Mode 2
Test Date	Sep. 28, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4959.56	46.48	74.00	-27.52	43.62	4.42	35.20	33.64	36	100	Peak	HORIZONTAL
2 a	4960.02	32.30	54.00	-21.70	29.44	4.42	35.20	33.64	36	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4959.75	48.65	74.00	-25.35	45.79	4.42	35.20	33.64	270	100	Peak	VERTICAL
2 a	4960.03	33.90	54.00	-20.10	31.04	4.42	35.20	33.64	270	100	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Main Source – EUT 1 (Mode 3 with Dipole Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 3
Test Date	Sep. 24, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4881.83	32.90	54.00	-21.10	30.29	4.33	35.20	33.48	272	121	Average	HORIZONTAL
2 p	4881.91	47.01	74.00	-26.99	44.40	4.33	35.20	33.48	272	121	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4882.05	36.71	54.00	-17.29	34.10	4.33	35.20	33.48	166	100	Average	VERTICAL
2 p	4882.46	51.96	74.00	-22.04	49.35	4.33	35.20	33.48	166	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Main Source – EUT 1 (Mode 4 with PIFA Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 4
Test Date	Sep. 29, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4882.05	37.21	54.00	-16.79	34.60	4.33	35.20	33.48	302	206	Average	HORIZONTAL
2 p	4882.13	52.70	74.00	-21.30	50.09	4.33	35.20	33.48	302	206	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4882.03	54.05	74.00	-19.95	51.44	4.33	35.20	33.48	313	170	Peak	VERTICAL
2 a	4882.07	37.90	54.00	-16.10	35.29	4.33	35.20	33.48	313	170	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Main Source – EUT 3 (Mode 5 with Dipole Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 5
Test Date	Sep. 29, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4882.11	33.36	54.00	-20.64	30.75	4.33	35.20	33.48	251	187	Average	HORIZONTAL
2 p	4882.17	47.35	74.00	-26.65	44.74	4.33	35.20	33.48	251	187	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4882.04	50.12	74.00	-23.88	47.51	4.33	35.20	33.48	204	100	Peak	VERTICAL
2 a	4882.04	35.48	54.00	-18.52	32.87	4.33	35.20	33.48	204	100	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Main Source – EUT 3 (Mode 6 with PIFA Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 6
Test Date	Sep. 29, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4881.99	34.45	54.00	-19.55	31.84	4.33	35.20	33.48	203	130	Average	HORIZONTAL
2 p	4882.25	48.15	74.00	-25.85	45.54	4.33	35.20	33.48	203	130	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4882.03	36.81	54.00	-17.19	34.20	4.33	35.20	33.48	250	100	Average	VERTICAL
2 p	4882.33	52.11	74.00	-21.89	49.50	4.33	35.20	33.48	250	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Second Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 0 / Mode 1
Test Date	Sep. 28, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4803.93	31.70	54.00	-22.30	29.31	4.23	35.20	33.36	253	121	Average	HORIZONTAL
2 p	4803.94	45.41	74.00	-28.59	43.02	4.23	35.20	33.36	253	121	Peak	HORIZONTAL

Vertical

	r req	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4803.95	34.04	54.00	-19.96	31.65	4.23	35.20	33.36	166	100	Average	VERTICAL
2 p	4804.36	48.70	74.00	-25.30	46.31	4.23	35.20	33.36	166	100	Peak	VERTICAL

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 1
Test Date	Sep. 28, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4882.08	34.60	54.00	-19.40	31.99	4.33	35.20	33.48	235	151	Average	HORIZONTAL
2 p	4882.42	48.68	74.00	-25.32	46.07	4.33	35.20	33.48	235	151	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4881.83	50.95	74.00	-23.05	48.34	4.33	35.20	33.48	166	100	Peak	VERTICAL
2 a	4882.04	35.86	54.00	-18.14	33.25	4.33	35.20	33.48	166	100	Average	VERTICAL

Temperature	23°C	Humidity	56%
Test Engineer	Satoshi Yang	Configurations	Channel 78 / Mode 1
Test Date	Sep. 28, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4960.02	31.46	54.00	-22.54	28.60	4.42	35.20	33.64	240	149	Average	HORIZONTAL
2 p	4960.34	45.08	74.00	-28.92	42.22	4.42	35.20	33.64	240	149	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4959.88	45.92	74.00	-28.08	43.06	4.42	35.20	33.64	170	100	Peak	VERTICAL
2 a	4959.95	32.10	54.00	-21.90	29.24	4.42	35.20	33.64	170	100	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Second Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 0 / Mode 2
Test Date	Sep. 28, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4803.91	32.91	54.00	-21.09	30.52	4.23	35.20	33.36	250	100	Average	HORIZONTAL
2 p	4804.00	47.40	74.00	-26.60	45.01	4.23	35.20	33.36	250	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4803.63	50.09	74.00	-23.91	47.70	4.23	35.20	33.36	272	112	Peak	VERTICAL
2 a	4803.97	35.36	54.00	-18.64	32.97	4.23	35.20	33.36	272	112	Average	VERTICAL

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 2
Test Date	Sep. 28, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4881.57	49.37	74.00	-24.63	46.76	4.33	35.20	33.48	229	100	Peak	HORIZONTAL
2 a	4882.01	34.64	54.00	-19.36	32.03	4.33	35.20	33.48	229	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4881.62	53.29	74.00	-20.71	50.68	4.33	35.20	33.48	2	100	Peak	VERTICAL
2 a	4882.00	37.43	54.00	-16.57	34.82	4.33	35.20	33.48	2	100	Average	VERTICAL

Temperature	23°C	Humidity	56%
Test Engineer	Satoshi Yang	Configurations	Channel 78 / Mode 2
Test Date	Sep. 28, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4959.90	44.57	74.00	-29.43	41.71	4.42	35.20	33.64	217	100	Peak	HORIZONTAL
2 a	4960.00	30.57	54.00	-23.43	27.71	4.42	35.20	33.64	217	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4959.65	48.59	74.00	-25.41	45.73	4.42	35.20	33.64	275	100	Peak	VERTICAL
2 a	4960.06	33.54	54.00	-20.46	30.68	4.42	35.20	33.64	275	100	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

<For Main Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 0, 39, 78 / Mode 1
Test Date	Sep. 24, 2010		

Channel 0

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2387.40	54.73	74.00	-19.27	23.82	2.86	0.00	28.05	261	100	Peak	VERTICAL
2	2390.00	43.27	54.00	-10.73	12.34	2.88	0.00	28.05	261	100	Average	VERTICAL
3 a	2402.00	71.38	54.00			2.88	0.00	28.09	261	100	Average	VERTICAL
4 p	2402.20	106.03	74.00			2.88	0.00	28.09	261	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2441.00	72.73	54.00			2.91	0.00	28.18	260	100	Average	VERTICAL
2 p	2441.20	108.41	74.00			2.91	0.00	28.18	260	100	Peak	VERTICAL
3	2483.50	43.42	54.00	-10.58	12.23	2.93	0.00	28.26	260	100	Average	VERTICAL
4	2485.90	54.00	74.00	-20.00	22.77	2.93	0.00	28.30	260	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	2480.00	107.76	74.00			2.93	0.00	28.26	259	100	Peak	VERTICAL
2 a	2480.00	72.23	54.00			2.93	0.00	28.26	259	100	Average	VERTICAL
3	2483.50	57.35	74.00	-16.65	26.16	2.93	0.00	28.26	259	100	Peak	VERTICAL
4	2483.50	46.75	54.00	-7.25	15.56	2.93	0.00	28.26	259	100	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Main Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 0, 39, 78 / Mode 2
Test Date	Sep. 28, 2010		

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.20	54.06	74.00	-19.94	23.15	2.86	0.00	28.05	225	100	Peak	VERTICAL
2	2390.00	43.26	54.00	-10.74	12.33	2.88	0.00	28.05	225	100	Average	VERTICAL
3 a	2402.00	67.41	54.00			2.88	0.00	28.09	225	100	Average	VERTICAL
4 p	2402.40	97.82	74.00			2.88	0.00	28.09	225	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2441.00	66.11	54.00			2.91	0.00	28.18	226	134	Average	HORIZONTAL
2 p	2441.40	94.92	74.00			2.91	0.00	28.18	226	134	Peak	HORIZONTAL
3	2483.50	43.42	54.00	-10.58	12.23	2.93	0.00	28.26	226	134	Average	HORIZONTAL
4	2484.30	54.65	74.00	-19.35	23.46	2.93	0.00	28.26	226	134	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	2480.00	101.24	74.00			2.93	0.00	28.26	212	131	Peak	VERTICAL
2 a	2480.00	69.14	54.00			2.93	0.00	28.26	212	131	Average	VERTICAL
3	2483.50	53.98	74.00	-20.02	22.79	2.93	0.00	28.26	212	131	Peak	VERTICAL
4	2483.50	44.76	54.00	-9.24	13.57	2.93	0.00	28.26	212	131	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Main Source – EUT 1 (Mode 3 with Dipole Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 3
Test Date	Sep. 29, 2010		

Channel 39

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	2441.00	105.88	74.00			2.91	0.00	28.18	259	100	Peak	VERTICAL
2 a	2441.00	71.49	54.00			2.91	0.00	28.18	259	100	Average	VERTICAL
3	2483.50	43.47	54.00	-10.53	12.28	2.93	0.00	28.26	259	100	Average	VERTICAL
4	2484.90	54.13	74.00	-19.87	22.94	2.93	0.00	28.26	259	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2441 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Main Source – EUT 1 (Mode 4 with PIFA Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 4
Test Date	Sep. 29, 2010		

Channel 39

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2441.00	68.68	54.00			2.91	0.00	28.18	360	129	Average	VERTICAL
2 p	2441.20	100.50	74.00			2.91	0.00	28.18	360	129	Peak	VERTICAL
3	2483.50	43.53	54.00	-10.47	12.34	2.93	0.00	28.26	360	129	Average	VERTICAL
4	2484.90	53.83	74.00	-20.17	22.64	2.93	0.00	28.26	360	129	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2441 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Main Source – EUT 3 (Mode 5 with Dipole Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 5
Test Date	Sep. 29, 2010		

Channel 39

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	2440.80	106.53	74.00			2.91	0.00	28.18	277	100	Peak	VERTICAL
2 a	2441.00	71.82	54.00			2.91	0.00	28.18	277	100	Average	VERTICAL
3	2483.50	43.49	54.00	-10.51	12.30	2.93	0.00	28.26	277	100	Average	VERTICAL
4	2484.10	53.01	74.00	-20.99	21.82	2.93	0.00	28.26	277	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2441 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Main Source – EUT 3 (Mode 6 with PIFA Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 6
Test Date	Sep. 29, 2010		

Channel 39

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2441.00	69.03	54.00			2.91	0.00	28.18	269	125	Average	VERTICAL
2 p	2441.20	101.41	74.00			2.91	0.00	28.18	269	125	Peak	VERTICAL
3	2483.50	43.17	54.00	-10.83	11.98	2.93	0.00	28.26	269	125	Average	VERTICAL
4	2486.30	53.33	74.00	-20.67	22.10	2.93	0.00	28.30	269	125	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2441 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Second Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 0, 39, 78 / Mode 1
Test Date	Sep. 28, 2010		

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2385.40	54.89	74.00	-19.11	23.98	2.86	0.00	28.05	277	100	Peak	VERTICAL
2	2390.00	43.41	54.00	-10.59	12.48	2.88	0.00	28.05	277	100	Average	VERTICAL
3 a	2402.00	71.32	54.00			2.88	0.00	28.09	277	100	Average	VERTICAL
4 p	2402.20	106.15	74.00			2.88	0.00	28.09	277	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2441.00	72.83	54.00			2.91	0.00	28.18	260	100	Average	VERTICAL
2 p	2441.20	108.95	74.00			2.91	0.00	28.18	260	100	Peak	VERTICAL
3	2483.50	43.57	54.00	-10.43	12.38	2.93	0.00	28.26	260	100	Average	VERTICAL
4	2487.50	54.23	74.00	-19.77	23.00	2.93	0.00	28.30	260	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	2479.80	107.88	74.00			2.93	0.00	28.26	259	100	Peak	VERTICAL
2 a	2480.00	72.73	54.00			2.93	0.00	28.26	259	100	Average	VERTICAL
3	2483.50	59.27	74.00	-14.73	28.08	2.93	0.00	28.26	259	100	Peak	VERTICAL
4	2483.50	47.10	54.00	-6.90	15.91	2.93	0.00	28.26	259	100	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Second Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Temperature	23°C	Humidity	53%
Test Engineer	Satoshi Yang	Configurations	Channel 0, 39, 78 / Mode 2
Test Date	Sep. 28, 2010		

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2390.00	53.21	74.00	-20.79	22.28	2.88	0.00	28.05	312	101	Peak	HORIZONTAL
2	2390.00	43.32	54.00	-10.68	12.39	2.88	0.00	28.05	312	101	Average	HORIZONTAL
3 a	2402.00	68.86	54.00			2.88	0.00	28.09	312	101	Average	HORIZONTAL
4 p	2402.20	100.58	74.00			2.88	0.00	28.09	312	101	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2441.00	69.84	54.00			2.91	0.00	28.18	356	102	Average	VERTICAL
2 p	2441.20	102.63	74.00			2.91	0.00	28.18	356	102	Peak	VERTICAL
3	2483.50	53.66	74.00	-20.34	22.47	2.93	0.00	28.26	356	102	Peak	VERTICAL
4	2483.50	43.52	54.00	-10.48	12.33	2.93	0.00	28.26	356	102	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	2480.00	102.43	74.00			2.93	0.00	28.26	337	103	Peak	VERTICAL
2 a	2480.00	69.90	54.00			2.93	0.00	28.26	337	103	Average	VERTICAL
3	2483.50	56.10	74.00	-17.90	24.91	2.93	0.00	28.26	337	103	Peak	VERTICAL
4	2483.50	45.45	54.00	-8.55	14.26	2.93	0.00	28.26	337	103	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


<For Main Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Low Band Edge Plot on Channel 0 / 2402 MHz

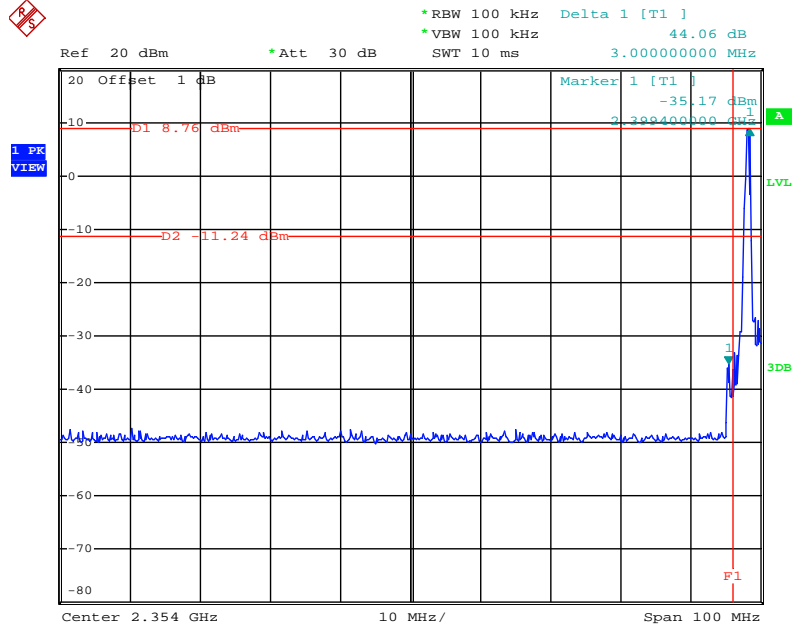

Date: 29.SEP.2010 15:32:31


High Band Edge Plot on Channel 78 / 2480 MHz

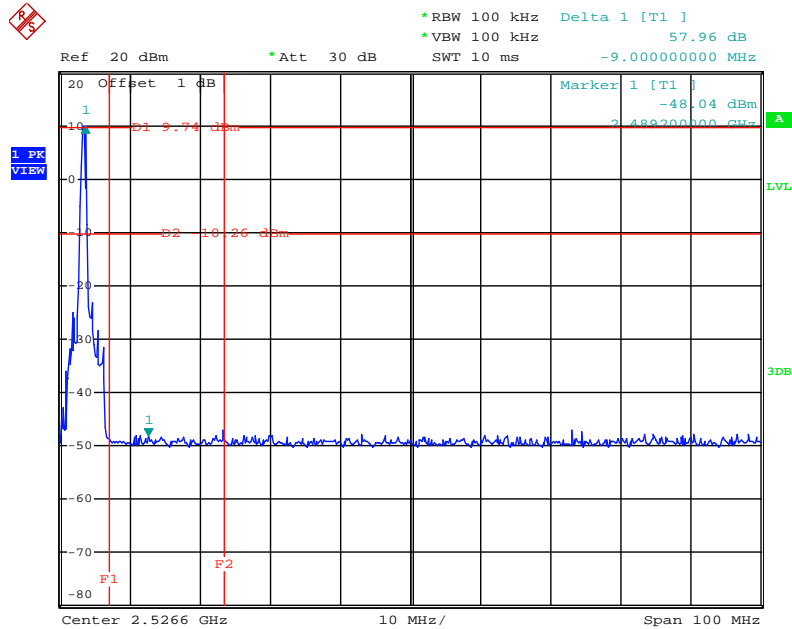

Date: 29.SEP.2010 15:37:05


<For Main Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Low Band Edge Plot on Channel 0 / 2402 MHz

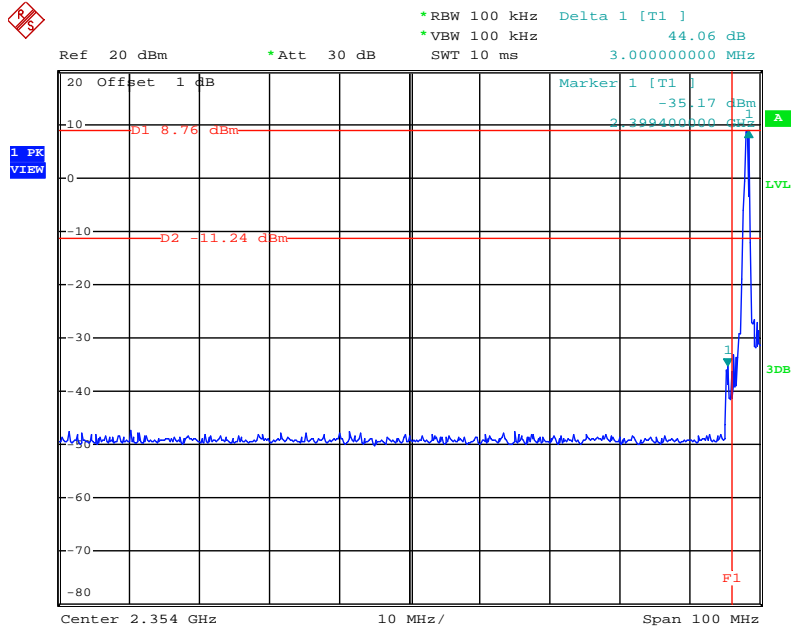

Date: 29.SEP.2010 15:32:31


High Band Edge Plot on Channel 78 / 2480 MHz

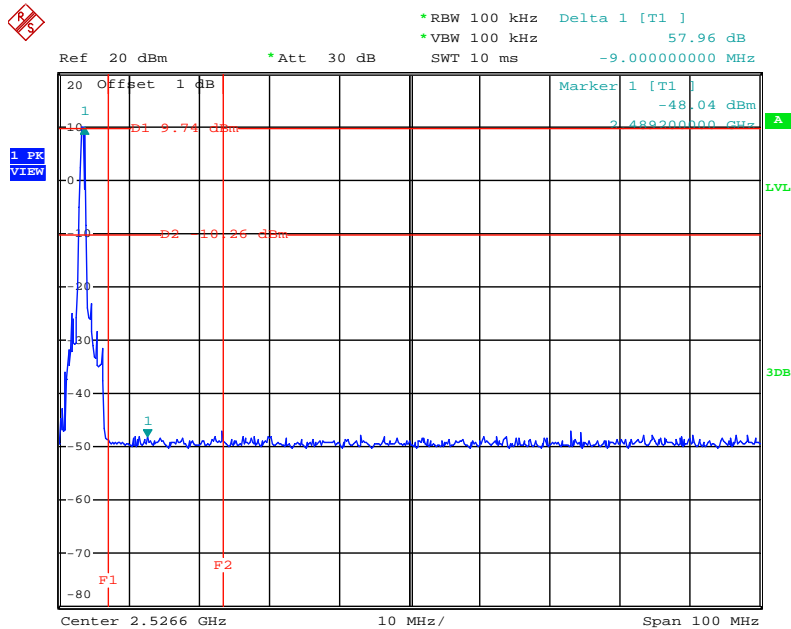

Date: 29.SEP.2010 15:37:05


<For Second Source – EUT 2 (Mode 1 with Dipole Antenna)>:

Low Band Edge Plot on Channel 0 / 2402 MHz

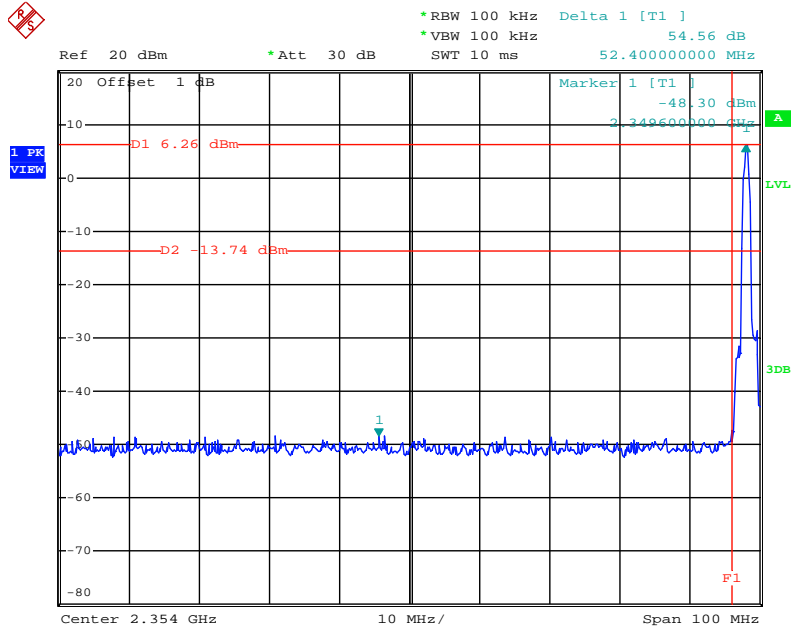

Date: 29.SEP.2010 14:54:13


High Band Edge Plot on Channel 78 / 2480 MHz

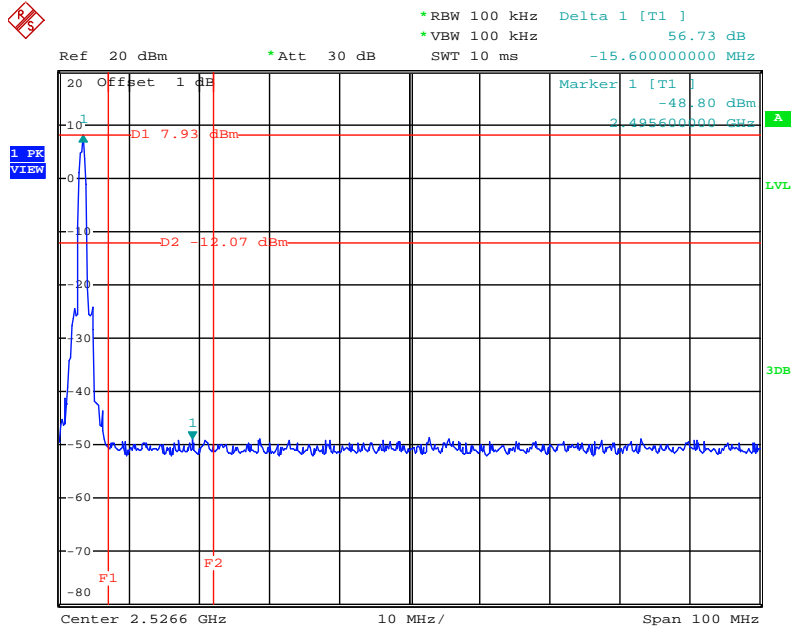

Date: 29.SEP.2010 14:52:20


<For Second Source – EUT 2 (Mode 2 with PIFA Antenna)>:

Low Band Edge Plot on Channel 0 / 2402 MHz

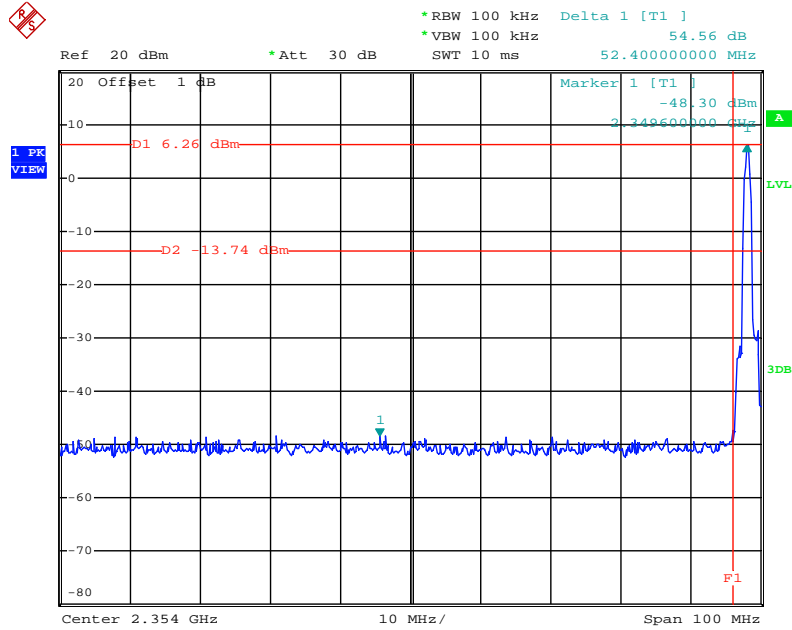

Date: 29.SEP.2010 14:54:13

High Band Edge Plot on Channel 78 / 2480 MHz

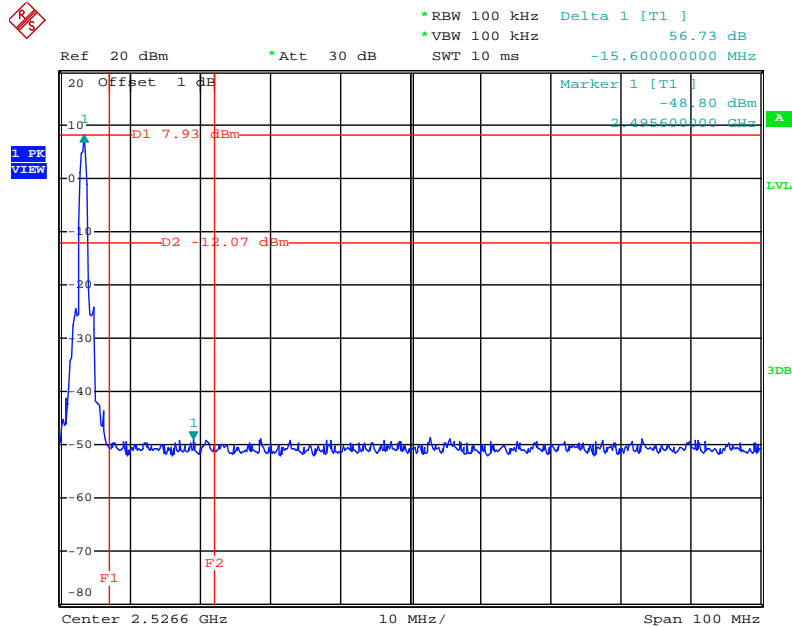

Date: 29.SEP.2010 14:52:20

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 06, 2010	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99041	9kHz – 30MHz	Mar. 23, 2010	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Apr. 29, 2010	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2010	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Jun. 10, 2010	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 18, 2010	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 24, 2010	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Aug. 02, 2010	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9 kHz - 40 GHz	Oct. 03, 2009	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Sep. 26, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 20, 2010	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.11, 2010	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 29, 2010*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 25, 2010	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 26, 2010*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Apr. 16, 2010	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2009	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Feb. 13, 2010	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 30, 2010	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)



Note: Calibration Interval of instruments listed above is one year.

Note: For "*" Calibration Interval of instruments listed above is two years.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-091230

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-san Chen

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 30, 2009

PI, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix



Annex

Declaration for Bluetooth Device acc to Part 15.247



1 Output power and channel separation of a Bluetooth device in the different operating modes:

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device has no influence on the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters.

Only a different hopping sequence will be used. For this reason the check of these RF parameters in one op-mode is sufficient.

2 Frequency range of a Bluetooth device:

Hereby we declare that the maximum frequency of this device is: 2402 – 2480 MHz. This is according to the Bluetooth Core Specification (+ critical errata) for devices which will be operated in the USA.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04-E). Other frequency ranges (e.g. for Spain, France, Japan) which are allowed according the Core Specification are not supported by this device.

3 Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:

Bluetooth units which want to communicate with other units must be organised in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from its BD address which is unique for each Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

4 Example of a hopping sequence in data mode:

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67,
56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59,
72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75,
09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06,
01, 51, 03, 55, 05, 04



5 Equally average use of frequencies in data mode and behaviour for short transmissions:

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronisation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5 μ s. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire

LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR- operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5 μ s). The hopping sequence will always differ from the first one.

6 Receiver input bandwidth and behaviour for repeated single or multiple packets:

The input bandwidth of the receiver is 1 MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master.

Additionally the type of connection (e.g. single or multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.



7 Dwell time in data mode

The dwell time of 0.3797s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is as follows:

Dwell time = time slot length * hop rate / number of hopping channels * 30s

Example for a DH1 packet (with a maximum length of one time slot) Dwell time = $625 \mu\text{s} * 1600 \text{ 1/s} / 79 * 30\text{s} = 0.3797\text{s}$ (in a 30s period)

For multislot packet the hopping is reduced according to the length of the packet. Example for a DH5 packet (with a maximum length of five time slots)

Dwell time = $5 * 625 \mu\text{s} * 1600 * 1/5 * 1/\text{s} / 79 * 30\text{s} = 0.3797\text{s}$ (in a 30s period). This is according to the Bluetooth Core Specification V 1.0B (+ critical errata) for all Bluetooth devices. Therefore all Bluetooth devices **comply** with the FCC dwell time requirement in data mode. This was checked during the Bluetooth Qualification tests. The Dwell time in hybrid mode is measured and stated in the test report.

8 Channel Separation in hybrid mode

The nominal channel spacing of the Bluetooth system is 1MHz independent of the operating mode.

The maximum "initial carrier frequency tolerance" which is allowed for Bluetooth is $f_{\text{center}} = 75 \text{ kHz}$.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/07-E) for three frequencies (2402, 2441, 2480 MHz).

Additionally an example for the channel separation is given in the test report

9 Derivation and examples for a hopping sequence in hybrid mode

For the generation of the inquiry and page hop sequences the same procedures as described for the data mode are used (see chapter 5), but this time with different input vectors:

- For the inquiry hop sequence, a predefined fixed address is always used. This results in the same 32 frequencies used by all devices doing an inquiry but every time with a different start frequency and phase in this sequence.
- For the page hop sequence, the device address of the paged unit is used as input vector. This results in the use of a subset of 32 frequencies which is specific for that initial state of the connection establishment between the two units. A page to different devices would result in a different subset of 32 frequencies.

So it is ensured that also in hybrid mode the frequency use is equally averaged.

Example of a hopping sequence in inquiry mode:

48, 50, 09, 13, 52, 54, 41, 45, 56, 58, 11, 15, 60, 62, 43, 47, 00, 02, 64, 68, 04, 06, 17, 21, 08, 10, 66, 70, 12, 14, 19, 23



Example of a hopping sequence in paging mode:

08, 57, 68, 70, 51, 02, 42, 40, 04, 61, 44, 46, 63, 14, 50, 48, 16, 65, 52, 54, 67, 18, 58, 56, 20, 53, 60, 62, 55, 06, 66, 64

10 Receiver input bandwidth and synchronisation in hybrid mode:

The receiver input bandwidth is the same as in the data mode (1 MHz). When two Bluetooth devices establish contact for the first time, one device sends an inquiry access code, the other device is scanning for this inquiry access code. If two devices have been connected previously and want to start a new transmission, a similar procedure takes place. The only difference is, instead of the inquiry access code, a special access code, derived from the BD_ADDRESS of the paged device will be, will be sent by the master of this connection.

Due to the fact that both units have been connected before (in the inquiry procedure) the paging unit has timing and frequency information about the page scan of the paged unit. For this reason the time to establish the connection is reduced considerable.

11 Spread rate / data rate of the direct sequence signal

The Spread rate / Data rate in inquiry and paging mode can be defined via the access code. The access code is the only criterion for the system to check if there is a valid transmission or not. If you regard the presence of a valid access code as one bit of information, and compare it with the length of the access code of 68 bits, the Spread rate / Data rate will be 68/1.

12 Spurious emission in hybrid mode

The dwell time in hybrid mode is shorter than in data mode. For this reason the spurious emissions average level in data mode is worst case. The spurious emissions peak level is the same for both modes.

13 Peak power spectral density measurement

Since the transmitter is only active for some milliseconds on one channel you would get a result with many interruptions if using a sweep time of e.g. 1s as stated in the FCC rules. Therefore a fast sweep in maxhold function is used instead and the EUT is activated several times until the measurement curve has stabilized.