


Appendix C. Co-location Report



1. Results of Radiated Emissions for Co-located

Temperature	1 5℃	Humidity	60%
Test Engineer	Sam Chen	Configurations	2.4GHz Bluetooth + 2.4GHz WLAN
Horizontal			

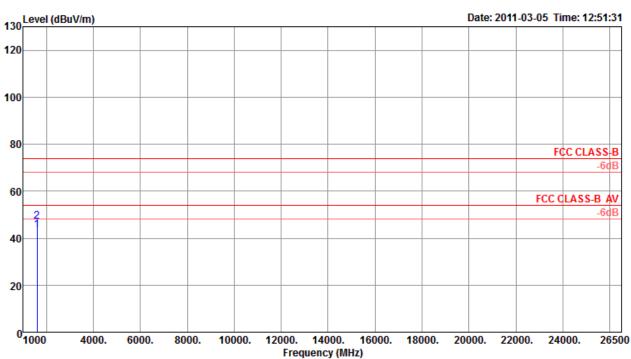


	Freq	Level	Limit Line			Cable PreampAntenna Loss Factor Factor		T/Pos	A/Pos Remark		Pol/Phase	
-	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	Cm		
	1599.97 1600.15								100 100		Average Peak	HORIZONTAL HORIZONTAL

120



Vertical

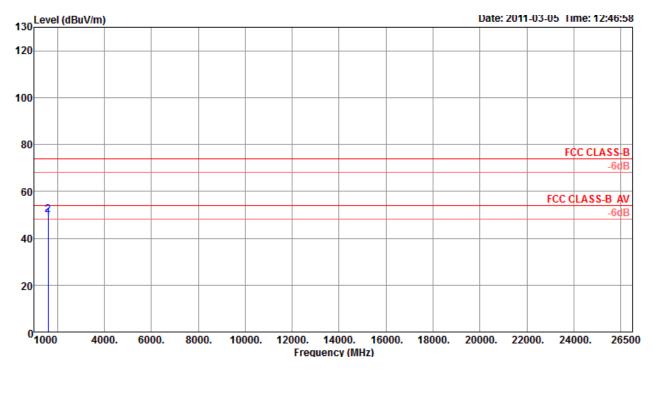

		Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	PreampA Factor	ntenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	Cm			
1	a 159	99.97	48.56	54.00	-5.44	55.63	1.62	34.79	26.10	100	174	Average	VERTICAL	
2	p 160	00.15	49.91	74.00	-24.09	56.98	1.62	34.79	26.10	100		Peak	VERTICAL	