




Appendix C. Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	15°C	Humidity	60%
Test Engineer	Sam Chen	Configurations	2.4GHz Bluetooth + 2.4GHz WLAN

Horizontal

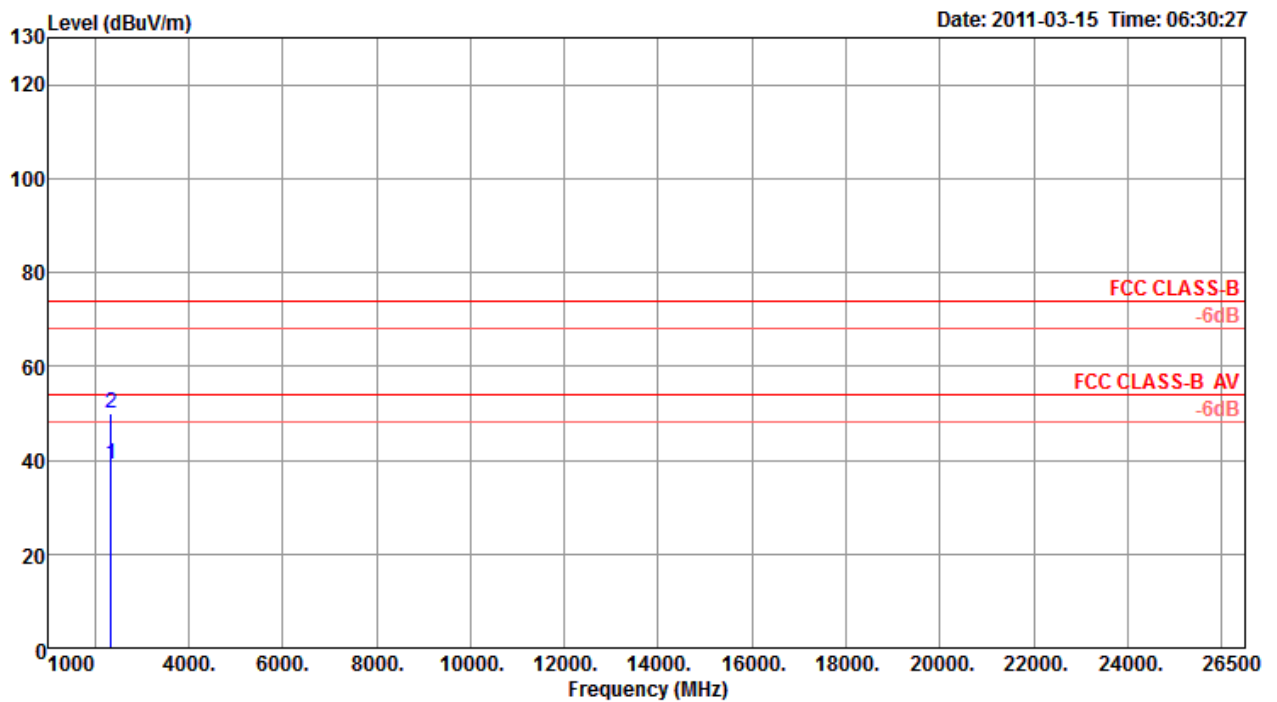

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2355.20	39.06	54.00	-14.94	44.07	2.03	34.96	27.92	354	129	Average	HORIZONTAL
2 p	2355.80	50.15	74.00	-23.85	55.16	2.03	34.96	27.92	354	129	Peak	HORIZONTAL

Vertical

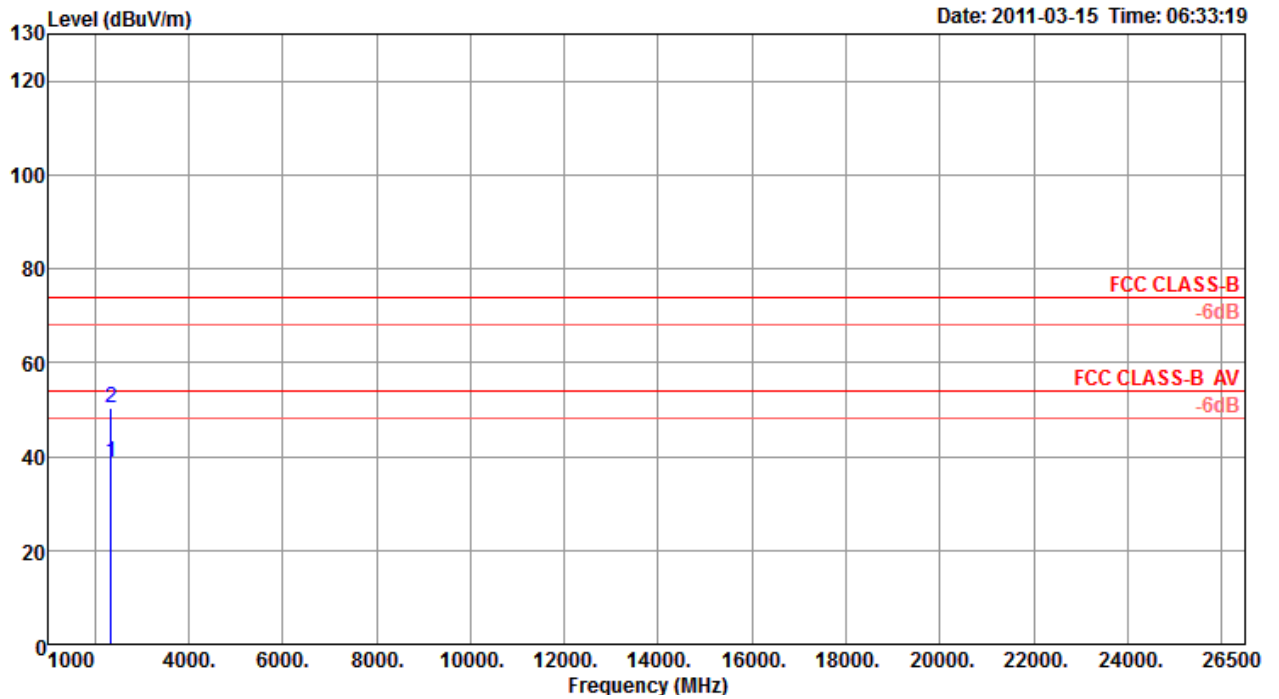

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2355.40	38.68	54.00	-15.32	43.69	2.03	34.96	27.92	137	128	Average	VERTICAL
2 p	2355.48	50.38	74.00	-23.62	55.39	2.03	34.96	27.92	137	128	Peak	VERTICAL