


## Appendix D. Co-location

### 1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	2.4GHz Bluetooth + 2.4GHz WLAN

**Horizontal**

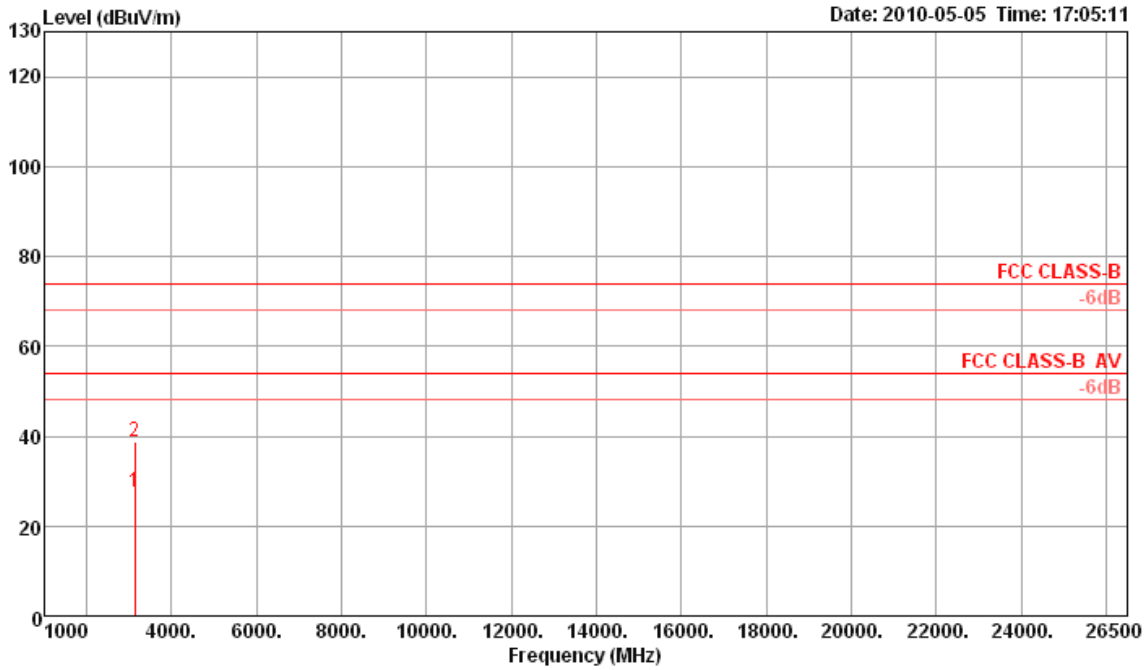

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	3124.92	27.69	54.00	-26.31	30.94	2.13	30.00	35.38	39	101 Average	HORIZONTAL
2	3125.00	38.59	74.00	-35.41	41.84	2.13	30.00	35.38	39	101 Peak	HORIZONTAL

Vertical

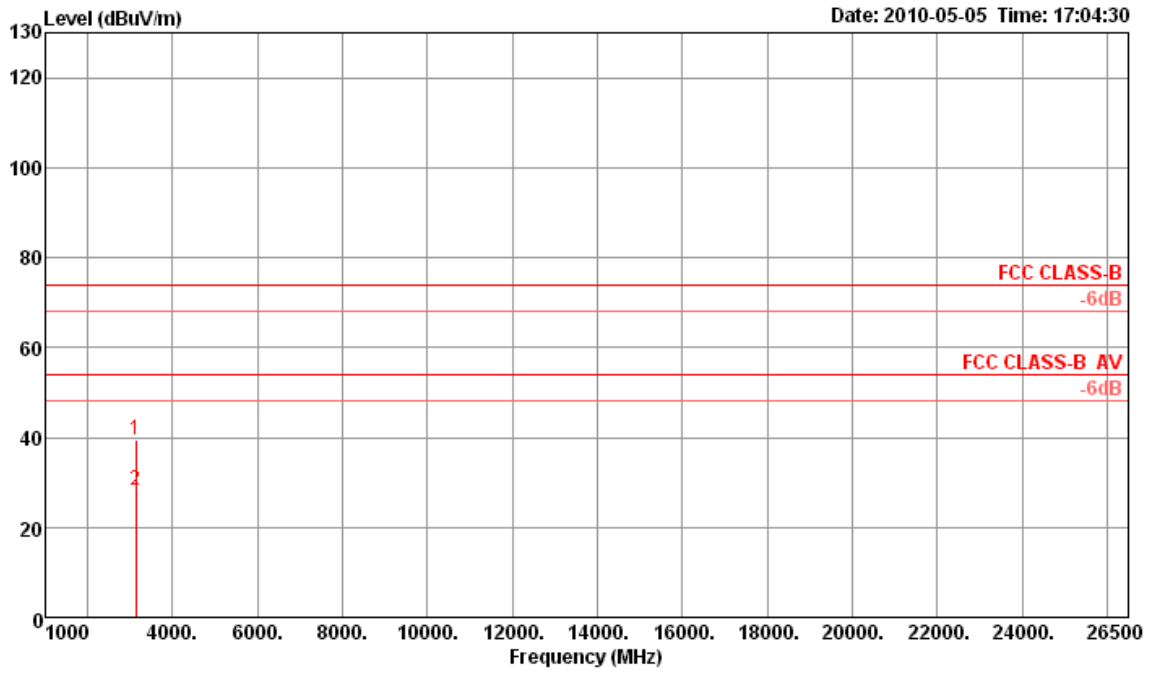

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	3124.89	39.32	74.00	-34.68	42.57	2.13	30.00	35.38	282	101	Peak	VERTICAL
2	3124.97	28.38	54.00	-25.62	31.63	2.13	30.00	35.38	282	101	Average	VERTICAL