


Appendix D. Co-location Report

1. Results of Radiated Emissions for Co-located

<For Main Source – Mode 1 >:


Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	2.4GHz Bluetooth + 2.4GHz WLAN

Horizontal

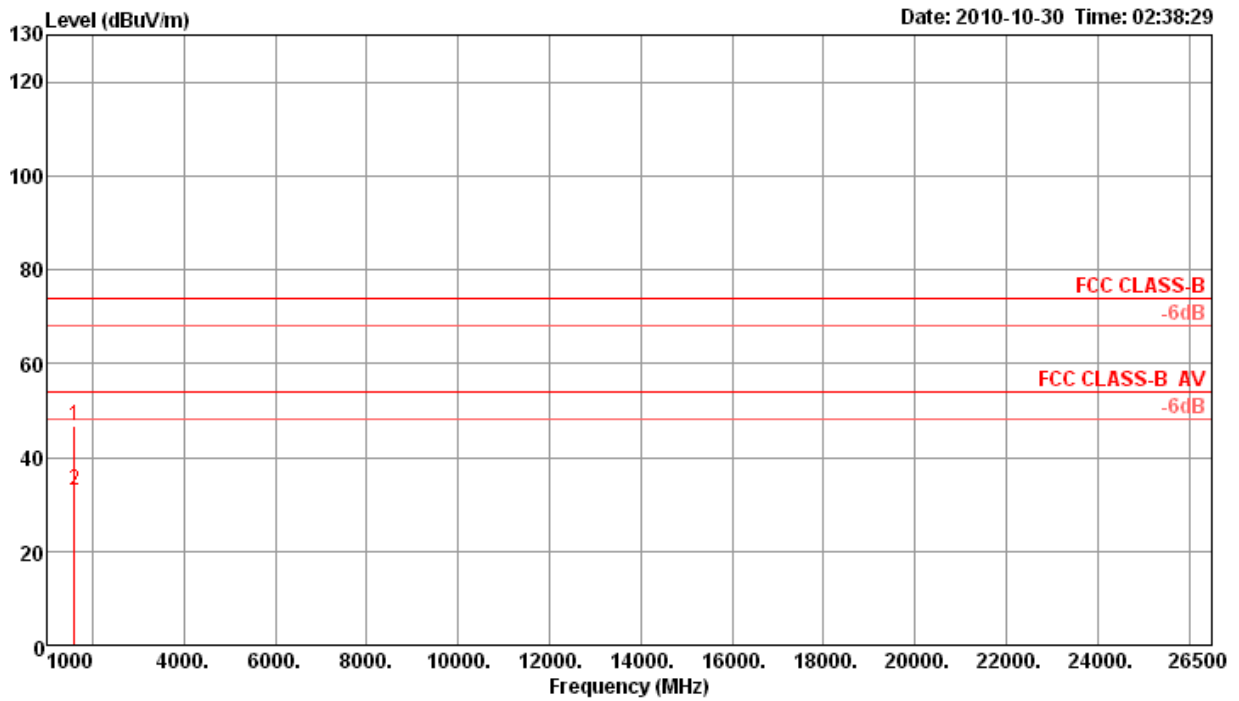

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	1596.36	46.70	74.00	-27.30	53.43	2.31	34.90	25.86	71	100	Peak	HORIZONTAL
2 a	1596.43	32.98	54.00	-21.02	39.71	2.31	34.90	25.86	71	100	Average	HORIZONTAL

Vertical

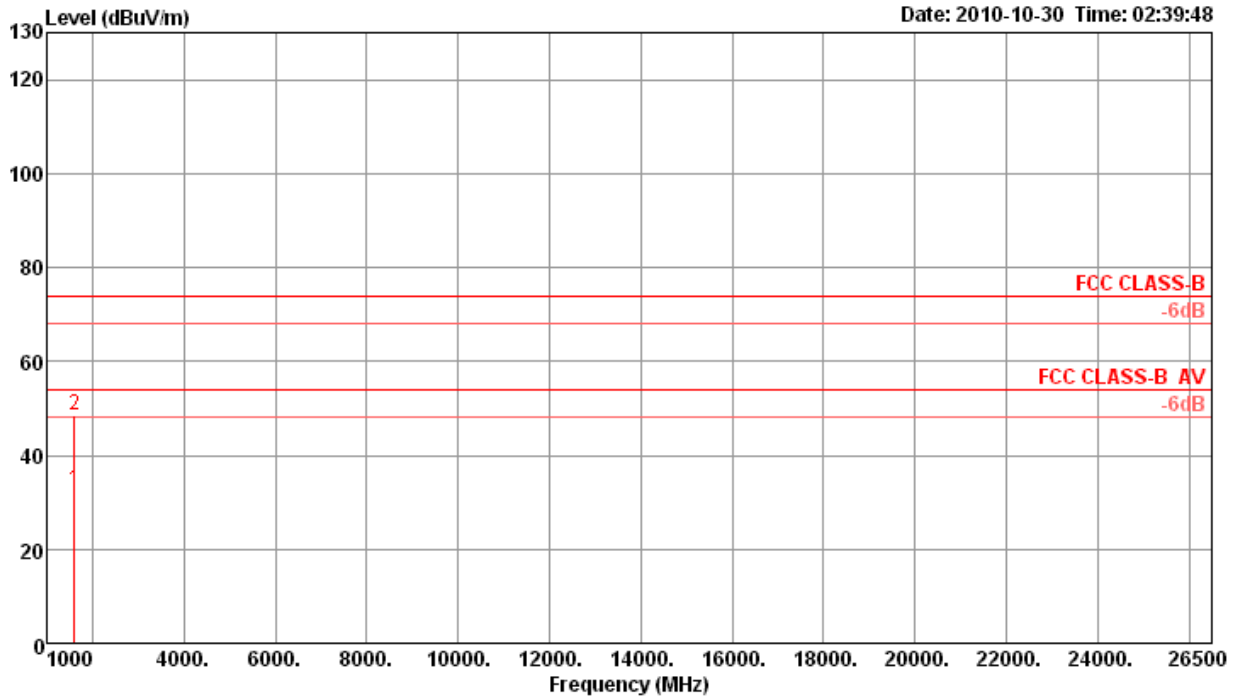


	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	1596.25	32.47	54.00	-21.53	39.20	2.31	34.90	25.86	228	100	Average	VERTICAL
2 p	1596.73	48.53	74.00	-25.47	55.26	2.31	34.90	25.86	228	100	Peak	VERTICAL

<For Second Source - Mode 2>:


Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	2.4GHz Bluetooth + 2.4GHz WLAN

Horizontal

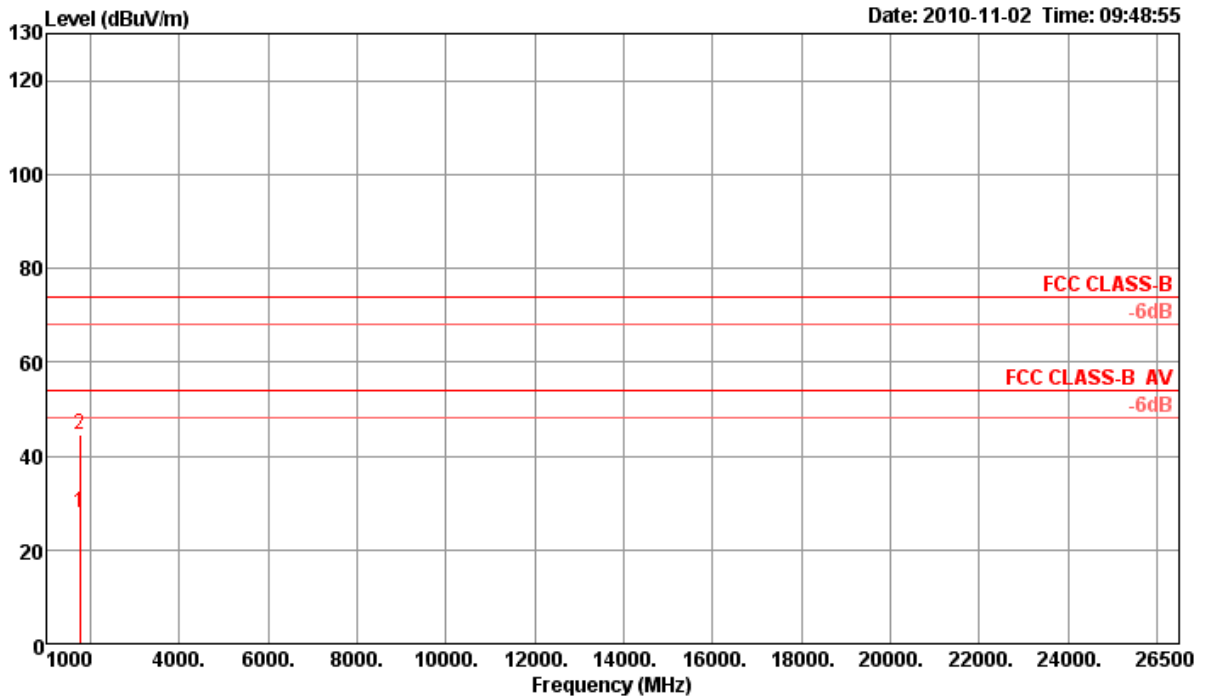

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	cm	deg		
1 a	1749.74	27.93	54.00	-26.07	34.32	1.69	35.08	27.00	100	239	Average	HORIZONTAL
2 p	1750.16	44.64	74.00	-29.36	51.03	1.69	35.08	27.00	100	239	Peak	HORIZONTAL

Vertical

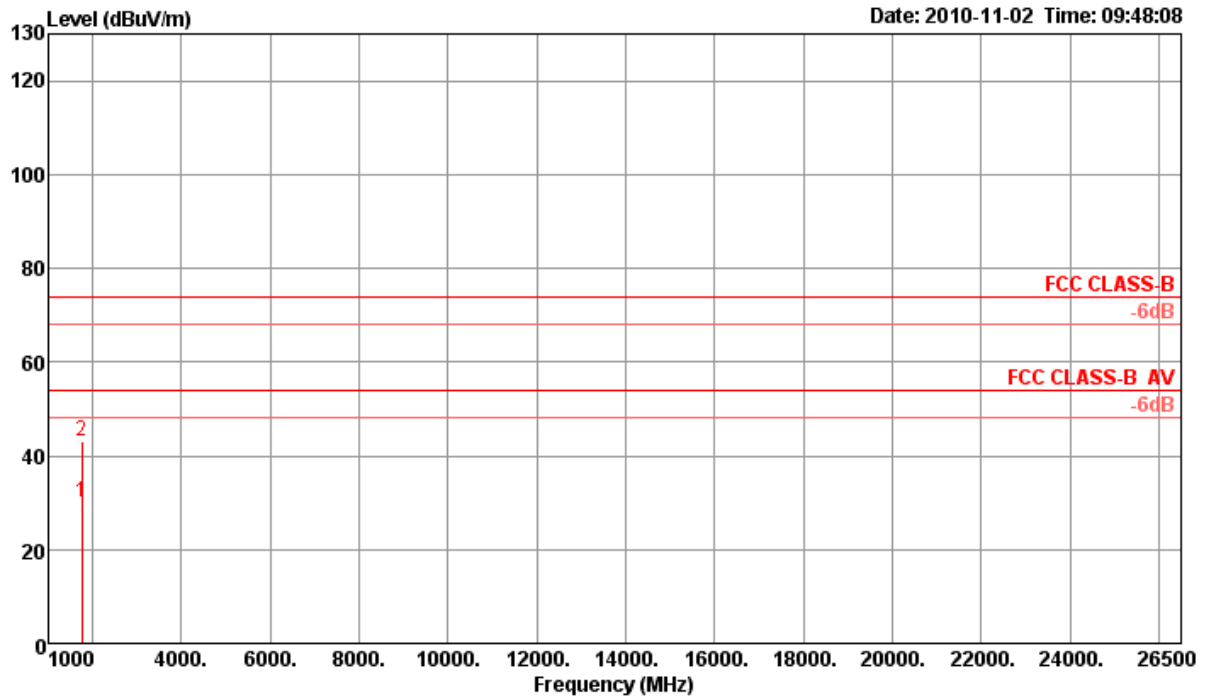

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	A/Pos	T/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	cm	deg		
1 a	1749.82	30.14	54.00	-23.86	36.53	1.69	35.08	27.00	100	319	Average	VERTICAL
2 p	1750.03	43.07	74.00	-30.93	49.46	1.69	35.08	27.00	100	319	Peak	VERTICAL