



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Realtek Semiconductor Corp.
Applicant Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
FCC ID	TX2RTL8192EEBT
Manufacturer's company	Realtek Semiconductor Corp.
Manufacturer Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Product Name	802.11b/g/n RTL8192EE Combo module
Brand Name	REALTEK
Model No.	RTL8192EEBT
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Mar. 06, 2013
Final Test Date	Apr. 12, 2013
Submission Type	Original Equipment
Multiple Listing	Please refer to section 3.7

### Statement

**Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v02 and KDB 662911 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies .....	8
3.5. Table for Test Modes .....	8
3.6. Table for Testing Locations.....	10
3.7. Table for Multiple Listing.....	11
3.8. Table for Supporting Units .....	11
3.9. Table for Parameters of Test Software Setting .....	12
3.10. EUT Operation during Test .....	13
3.11. Duty Cycle.....	14
3.12. Test Configurations .....	19
<b>4. TEST RESULT .....</b>	<b>22</b>
4.1. AC Power Line Conducted Emissions Measurement.....	22
4.2. Maximum Conducted Output Power Measurement.....	26
4.3. Power Spectral Density Measurement .....	30
4.4. 6dB Spectrum Bandwidth Measurement .....	40
4.5. Radiated Emissions Measurement .....	49
4.6. Emissions Measurement .....	109
4.7. Antenna Requirements .....	156
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>157</b>
<b>6. TEST LOCATION.....</b>	<b>159</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A7</b>
<b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>B1 ~ B3</b>
<b>APPENDIX C. CO-LOCATION REPORT.....</b>	<b>C1 ~ C9</b>
<b>APPENDIX D. Antenna List.....</b>	<b>D1 ~ D4</b>




## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR332724AA	Rev. 01	Initial issue of report	May 08, 2013

## 1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11b/g/n RTL8192EE Combo module  
Brand Name : REALTEK  
Model No. : RTL8192EEBT  
Applicant : Realtek Semiconductor Corp.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 06, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

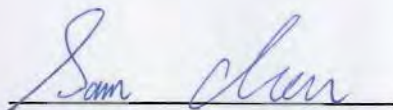

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	14.35 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	8.26 dB
4.3	15.247(e)	Power Spectral Density	Complies	13.73 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	2.91 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.03 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n

Items	Description
Product Type	WLAN (1TX/2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	For 1TX: MCS0 20MHz: 17.84 MHz MCS0 40MHz: 36.16 MHz For 2TX: MCS0 20MHz: 17.84 MHz MCS8 20MHz: 17.76 MHz MCS0 40MHz: 36.32 MHz MCS8 40MHz: 36.32 MHz
Maximum Conducted Output Power	For 1TX: MCS0 20MHz: 18.87 dBm MCS0 40MHz: 17.82 dBm For 2TX: MCS0 20MHz: 21.74 dBm MCS8 20MHz: 21.72 dBm MCS0 40MHz: 17.47 dBm MCS8 40MHz: 19.37 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**IEEE 802.11b/g**

Items	Description
Product Type	802.11b :WLAN (1TX, 1RX) 802.11g :WLAN (1TX/2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	For 1TX: 11b: 15.04 MHz 11g: 16.56 MHz For 2TX: 11g: 16.80 MHz
Maximum Conducted Output Power	For 1TX: 11b: 18.98 dBm 11g: 18.92 dBm For 2TX: 11g: 21.55 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**Antenna & Band width**

Antenna	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
Band width Mode				
IEEE 802.11b	V	X	X	X
IEEE 802.11g	V	X	V	X
IEEE 802.11n	V	V	V	V

**IEEE 11n Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	1	MCS 0-7
802.11n (HT40)	1	MCS 0-7
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40.

Note 2: Modulation modes consist of below configuration:  
HT20/HT40: IEEE 802.11n

**3.2. Accessories**

N/A



### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	LYNwave	ALA110-222050-300011	PIFA Antenna	I-PEX MHF4	3.5	TX/RX
2	LYNwave	ALA110-222050-300010	PIFA Antenna	I-PEX	3.5	TX/RX
3	JOYMAX	TWF-614XMPXX-500	Dipole Antenna	I-PEX	3.0	TX/RX

Note: There are two configurations of EUT. The more information is listed as below table.

Configuration	Type	Power Type	Type of Antenna
1	HMC	PCI-E (WLAN)	PIFA with I-PEX connector
		USB (Bluetooth)	Dipole with I-PEX connector
2	NGFF	PCI-E (WLAN)	PIFA with I-PEX MHF4 connector
		USB (Bluetooth)	

The EUT supports the diversity function for WLAN and Bluetooth, and it only works in chain 2.

#### For IEEE 802.11b (1TX, 1RX) mode:

The EUT supports the antenna with TX/RX diversity function

Both of Chain 1 and Chain 2 can be used as transmitting/receiving antennas, but only one antenna can be used as transmitting/receiving antenna at the same time.

Chain 1 generated the worst case than Chain 2, so it tested and recorded in the report.

#### For IEEE 802.11g (1TX, 2RX) mode:

The EUT supports the antenna with TX diversity function

Both of Chain 1 and Chain 2 can be used as transmitting/receiving antennas, but only one antenna can be used as transmitting antenna at the same time.

Chain 1 generated the worst case than Chain 2, so it tested and recorded in the report.

Chain 1 and Chain 2 could receive simultaneously.

#### For IEEE 802.11g (2TX, 2RX) mode:

Both of Chain 1 and Chain 2 can be used as transmitting/receiving antennas.

Chain 1 and Chain 2 could transmit/receive simultaneously.

#### For IEEE 802.11n (MCS0-7) (1TX, 2RX) mode:

The EUT supports the antenna with TX diversity function

Both of Chain 1 and Chain 2 can be used as transmitting/receiving antennas, but only one antenna can be used as transmitting antenna at the same time.

Chain 1 generated the worst case than Chain 2, so it tested and recorded in the report.

Chain 1 and Chain 2 could receive simultaneously.


#### For IEEE 802.11n (MCS0-15) (2TX, 2RX) mode:

Both of Chain 1 and Chain 2 can be used as transmitting/receiving antennas.

Chain 1 and Chain 2 could transmit/receive simultaneously.

#### For Bluetooth (1TX, 1RX) mode :

Only Chain 2 can be use as transmit and receive antenna.

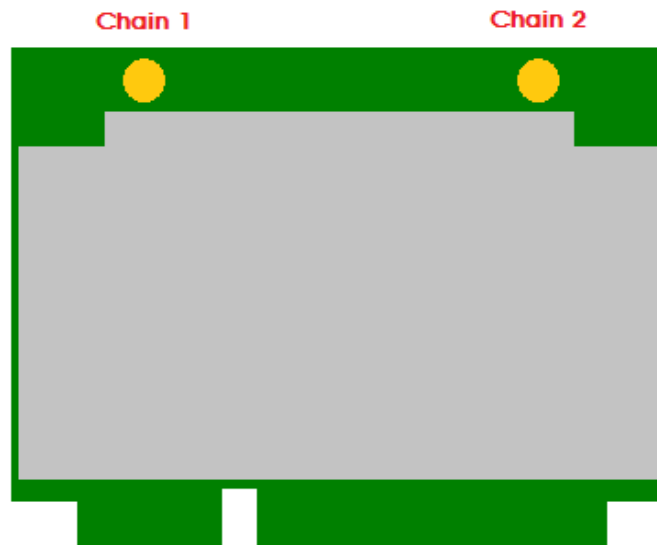

### 3.4. Table for Carrier Frequencies

For IEEE 802.11b/g, use Channel 1~Channel 11.

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link		-	-	-
Maximum Conducted Output Power	1TX	802.11n 20MHz	MCS0	1/6/11	1
	1TX	802.11n 40MHz	MCS0	3/6/9	1
	2TX	802.11n 20MHz	MCS0	1/6/11	1+2
	2TX	802.11n 40MHz	MCS0	3/6/9	1+2
	2TX	802.11n 20MHz	MCS8	1/6/11	1+2
	2TX	802.11n 40MHz	MCS8	3/6/9	1+2
	1TX	11b/BPSK	1 Mbps	1/6/11	1
	1TX	11g/BPSK	6 Mbps	1/6/11	1
	2TX	11g/BPSK	6 Mbps	1/6/11	1+2
Power Spectral Density	1TX	802.11n 20MHz	MCS0	1/6/11	1
	1TX	802.11n 40MHz	MCS0	3/6/9	1
	2TX	802.11n 20MHz	MCS0	1/6/11	1&2
	2TX	802.11n 40MHz	MCS0	3/6/9	1&2
	2TX	802.11n 20MHz	MCS8	1/6/11	1&2
	2TX	802.11n 40MHz	MCS8	3/6/9	1&2
	1TX	11b/BPSK	1 Mbps	1/6/11	1
	1TX	11g/BPSK	6 Mbps	1/6/11	1
	2TX	11g/BPSK	6 Mbps	1/6/11	1&2

6dB Spectrum Bandwidth	1TX	802.11n 20MHz	MCS0	1/6/11	1
	1TX	802.11n 40MHz	MCS0	3/6/9	1
	2TX	802.11n 20MHz	MCS0	1/6/11	1+2
	2TX	802.11n 40MHz	MCS0	3/6/9	1+2
	2TX	802.11n 20MHz	MCS8	1/6/11	1+2
	2TX	802.11n 40MHz	MCS8	3/6/9	1+2
	1TX	11b/BPSK	1 Mbps	1/6/11	1
	1TX	11g/BPSK	6 Mbps	1/6/11	1
	2TX	11g/BPSK	6 Mbps	1/6/11	1+2
Radiated Emissions 9kHz~1GHz	Normal Link		-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	1TX	802.11n 20MHz	MCS0	1/6/11	1
	1TX	802.11n 40MHz	MCS0	3/6/9	1
	2TX	802.11n 20MHz	MCS0	1/6/11	1+2
	2TX	802.11n 40MHz	MCS0	3/6/9	1+2
	2TX	802.11n 20MHz	MCS8	1/6/11	1+2
	2TX	802.11n 40MHz	MCS8	3/6/9	1+2
	1TX	11b/BPSK	1 Mbps	1/6/11	1
	1TX	11g/BPSK	6 Mbps	1/6/11	1
	2TX	11g/BPSK	6 Mbps	1/6/11	1+2
Band Edge Emissions	1TX	802.11n 20MHz	MCS0	1/6/11	1
	1TX	802.11n 40MHz	MCS0	3/6/9	1
	2TX	802.11n 20MHz	MCS0	1/6/11	1+2
	2TX	802.11n 40MHz	MCS0	3/6/9	1+2
	2TX	802.11n 20MHz	MCS8	1/6/11	1+2
	2TX	802.11n 40MHz	MCS8	3/6/9	1+2
	1TX	11b/BPSK	1 Mbps	1/6/11	1
	1TX	11g/BPSK	6 Mbps	1/6/11	1
	2TX	11g/BPSK	6 Mbps	1/6/11	1+2

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. HMC + PIFA with I-PEX connector

Mode 2. HMC + Dipole with I-PEX connector

Mode 3. NGFF + PIFA with I-PEX MHF4 connector

Mode 3 generated the worst test result, so it was recorded in this report.

**For Radiated Emission test below 1GHz:**

Mode 1. HMC + PIFA with I-PEX connector

Mode 2. HMC + Dipole with I-PEX connector

Mode 3. NGFF + PIFA with I-PEX MHF4 connector

Mode 1 generated the worst test result, so it was recorded in this report.

**For Radiated Emission test above 1GHz:**

Mode 1. HMC + PIFA with I-PEX connector

Mode 2. NGFF + PIFA with I-PEX MHF4 connector

Mode 3. HMC + Dipole with I-PEX connector

Mode 1 and Mode 3 generated the worst test result, so they were recorded in the report.

**For Co-location Test:**

The device supports WLAN and Bluetooth functions, and both of them could transmit and receive signal simultaneously through SPDT switch.

Therefore, it is evaluated co-location and MPE tests.

Mode 1. HMC+PIFA with I-PEX connector: 11n 20MHz 2437MHz+Bluetooth 2480MHz (WLAN Path Chain 2)

Mode 2. HMC+PIFA with I-PEX connector: 11n 20MHz 2437MHz+Bluetooth 2480MHz (Bluetooth Path Chain 2)

Mode 3. HMC+Dipole with I-PEX connector: 11n 20MHz 2437MHz+Bluetooth 2480MHz (Bluetooth Path Chain 2)

Mode 4. HMC+Dipole with I-PEX connector: 11n 20MHz 2437MHz+Bluetooth 2480MHz (WLAN Path Chain 2)

Mode 5. HMC+PIFA with I-PEX connector: 11b Chain1 2437MHz+Bluetooth 2480MHz (WLAN Path Chain 2)

Mode 6. HMC+PIFA with I-PEX connector: 11b Chain1 2437MHz+Bluetooth 2480MHz (Bluetooth Path Chain 2)

Mode 7. HMC+Dipole with I-PEX connector: 11b Chain2 2437MHz+Bluetooth 2480MHz (WLAN Path Chain 2)

Mode 8. HMC+Dipole with I-PEX connector: 11b Chain2 2437MHz+Bluetooth 2480MHz (Bluetooth Path Chain 2)

Mode 2, Mode 3, Mode 5 and Mode 8 generated the worst test result, so they were recorded in the report.

**<For MPE and Co-location Test>:**

The EUT could be applied with 2.4GHz WLAN function and Bluetooth function; therefore Maximum Permissible Exposure (Please refer to Appendix B) and Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and Bluetooth function.

**3.6. Table for Testing Locations**

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC) Please refer section 6 for Test Site Address.

### 3.7. Table for Multiple Listing

The brand/model names in the following table are all refer to the identical product.

Model No.		Combination of interface and board type		Antenna Variety	Type of antenna	
		WLAN	Bluetooth		PIFA	Dipole
RTL8192EEBT	HMC	PCI-E	USB	Dual antenna Diversity	V	V
	NGFF				V	-

### 3.8. Table for Supporting Units

Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Wireless AP	Planex	GW-AP54SGX	N/A
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6220	QDS-BRCM1049LE
Mouse	Logitech	M-U0026	DoC
Earphone	SHYARO CHI	MIC-04	N/A
802.11b/g/n RTL8192EE Combo module	REALTEK	RTL8192EEBT	TX2RTL8192EEBT
The test fixture	REALTEK	PCIE Adapter	N/A

Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6220	N/A
Mouse	Logitech	M-U0026	DoC
Earphone	SHYARO CHI	MIC-04	N/A
Notebook	DELL	E6430	QDS-BRCM1049
Wireless AP	Planex	GW-AP54SGX	N/A
802.11b/g/n RTL8192EE Combo module	REALTEK	RTL8192EEBT	TX2RTL8192EEBT
The test fixture	REALTEK	PCIE Adapter	N/A

Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6220	N/A
The test fixture	REALTEK	PCIE Adapter	N/A

### 3.9. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For 1TX

Power Parameters of IEEE 802.11n MCS0 20MHz / Chain 1

Test Software Version	Realtek 11n 8192E PCIE WLAN MP Diagnostic Program 0.008.20130221		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	44	50	45

For 2TX

Power Parameters of IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2

Test Software Version	Realtek 11n 8192E PCIE WLAN MP Diagnostic Program 0.008.20130221		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	42/43	53/54	39/40

Power Parameters of IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2

Test Software Version	Realtek 11n 8192E PCIE WLAN MP Diagnostic Program 0.008.20130221		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS8 20MHz	42/43	53/54	44/45

For 1TX

Power Parameters of IEEE 802.11n MCS0 40MHz / Chain 1

Test Software Version	Realtek 11n 8192E PCIE WLAN MP Diagnostic Program 0.008.20130221		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	42	49	43

**For 2TX**
**Power Parameters of IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2**

Test Software Version	Realtek 11n 8192E PCIE WLAN MP Diagnostic Program 0.008.20130221		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	37/39	44/46	38/40

**Power Parameters of IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2**

Test Software Version	Realtek 11n 8192E PCIE WLAN MP Diagnostic Program 0.008.20130221		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS8 40MHz	42/44	48/50	42/43

**For 1TX**
**Power Parameters of IEEE 802.11b / Chain 1**

Test Software Version	Realtek 11n 8192E PCIE WLAN MP Diagnostic Program 0.008.20130221		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	37	40	37

**For 1TX**
**Power Parameters of IEEE 802.11g**

Test Software Version	Realtek 11n 8192E PCIE WLAN MP Diagnostic Program 0.008.20130221		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g	44	50	45

**For 2TX**
**Power Parameters of IEEE 802.11g**

Test Software Version	Realtek 11n 8192E PCIE WLAN MP Diagnostic Program 0.008.20130221		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g	42/42	52/53	45/45


### 3.10. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.




### 3.11. Duty Cycle

#### IEEE 802.11n MCS0 20MHz / For 1TX / Chain 1

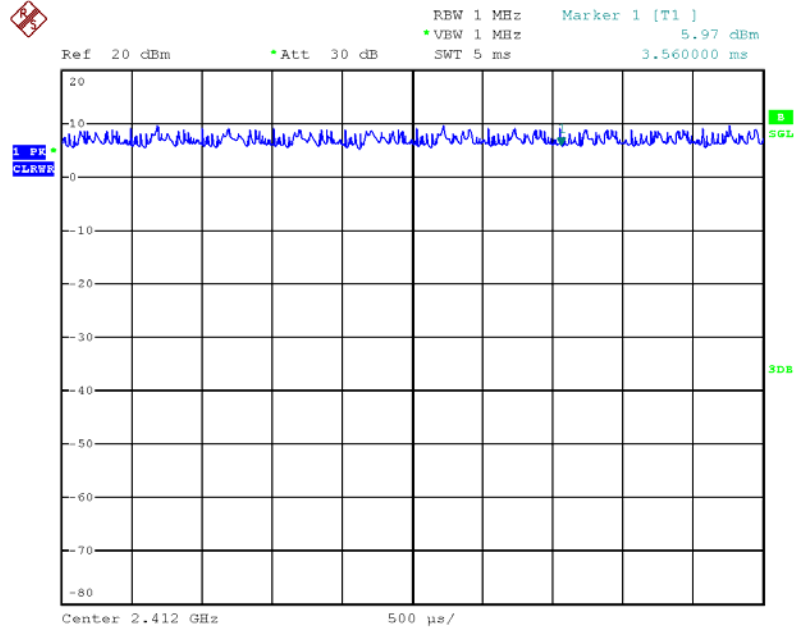


Date: 25.MAR.2013 21:45:31

#### IEEE 802.11n MCS0 20MHz / For 2TX / Chain 1 + Chain 2

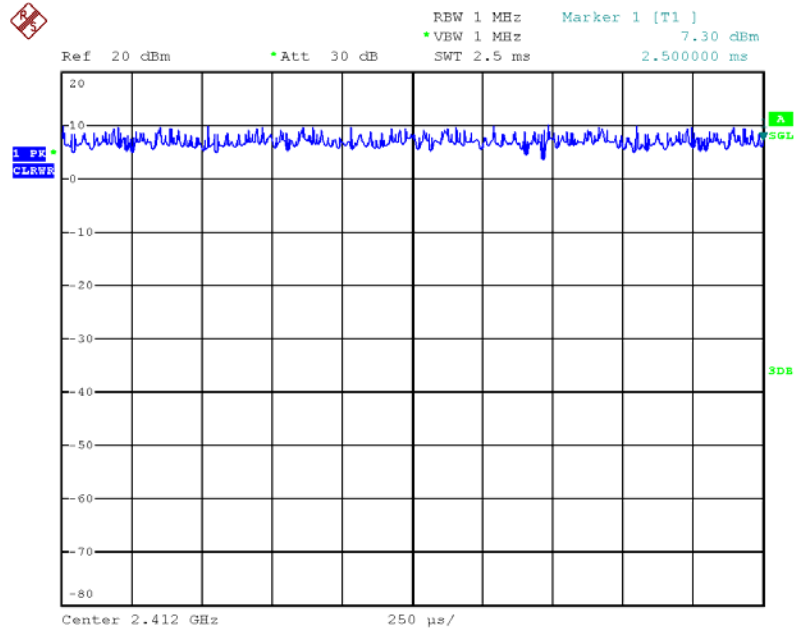


Date: 25.MAR.2013 23:39:40

IEEE 802.11n MCS8 20MHz / For 2TX / Chain 1 + Chain 2

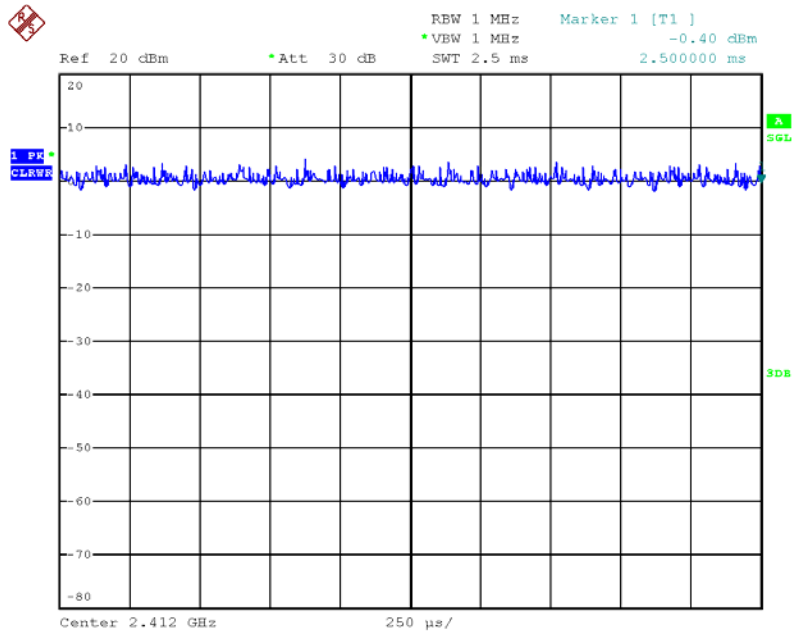


Date: 25.MAR.2013 23:40:30

IEEE 802.11n MCS0 40MHz / For 1TX / Chain 1

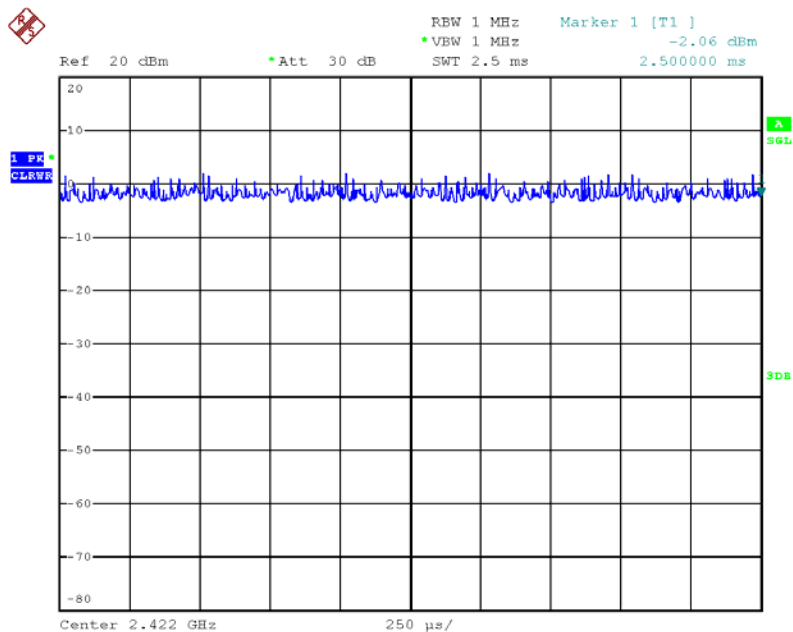


Date: 25.MAR.2013 23:41:03

IEEE 802.11n MCS0 40MHz / For 2TX / Chain 1 + Chain 2

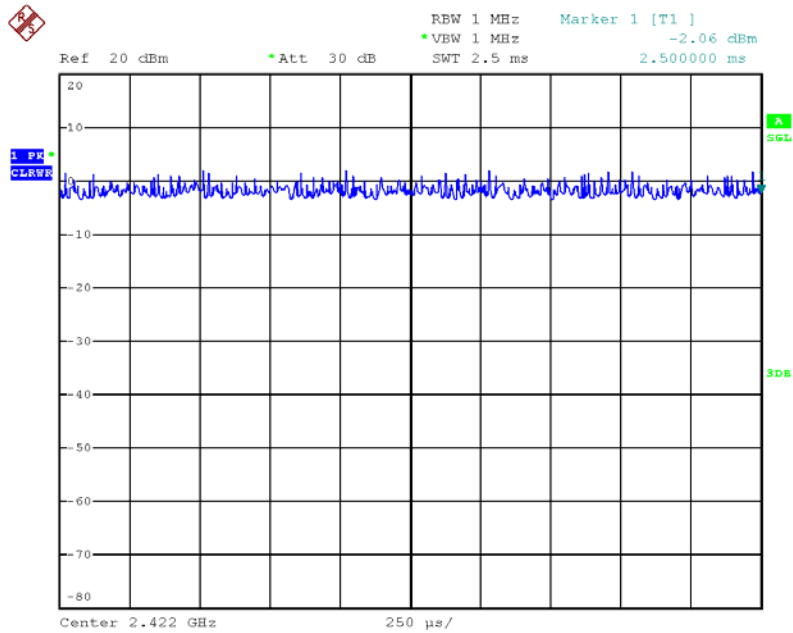


Date: 25.MAR.2013 23:41:03

IEEE 802.11n MCS8 40MHz / For 2TX / Chain 1 + Chain 2

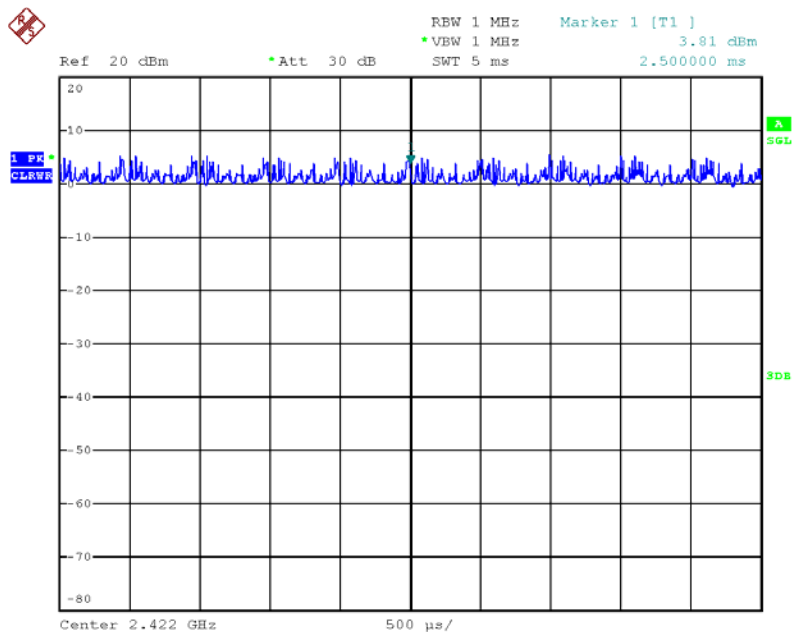


Date: 25.MAR.2013 23:41:47

IEEE 802.11b / For 1TX / Chain 1

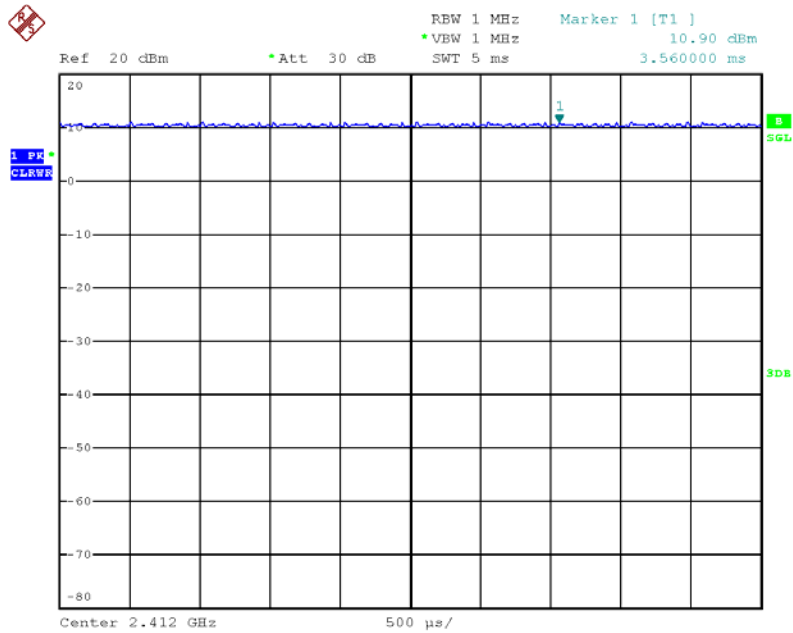


Date: 25.MAR.2013 21:37:39

IEEE 802.11g / For 1TX / Chain 1

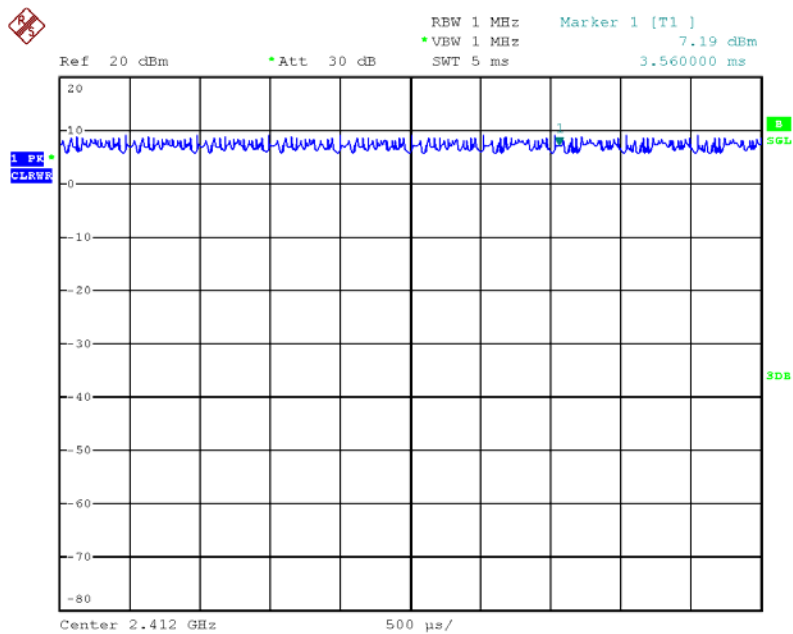

Date: 25.MAR.2013 21:42:06


### IEEE 802.11g / For 2TX / Chain 1 + Chain 2

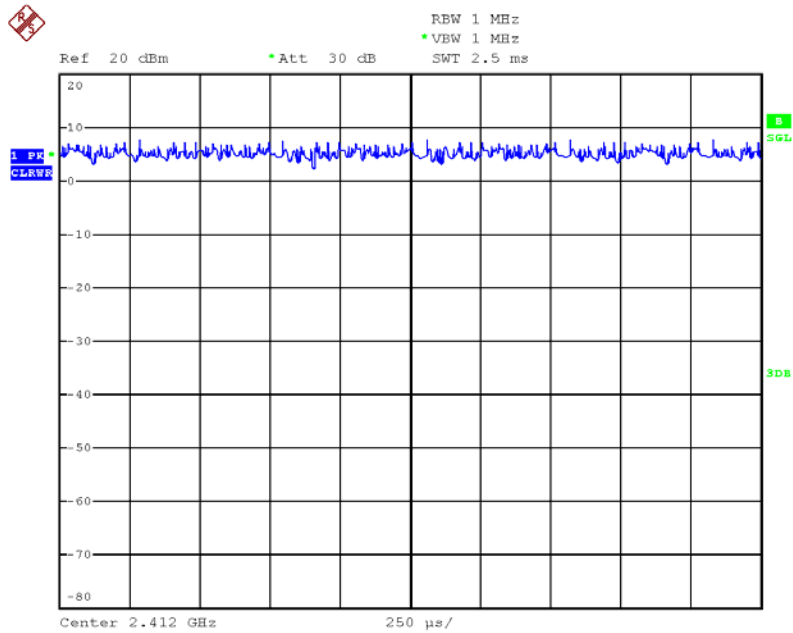

Date: 25.MAR.2013 22:12:04

### 3.12. Test Configurations


#### 3.12.1. AC Power Line Conduction Emissions Test Configuration

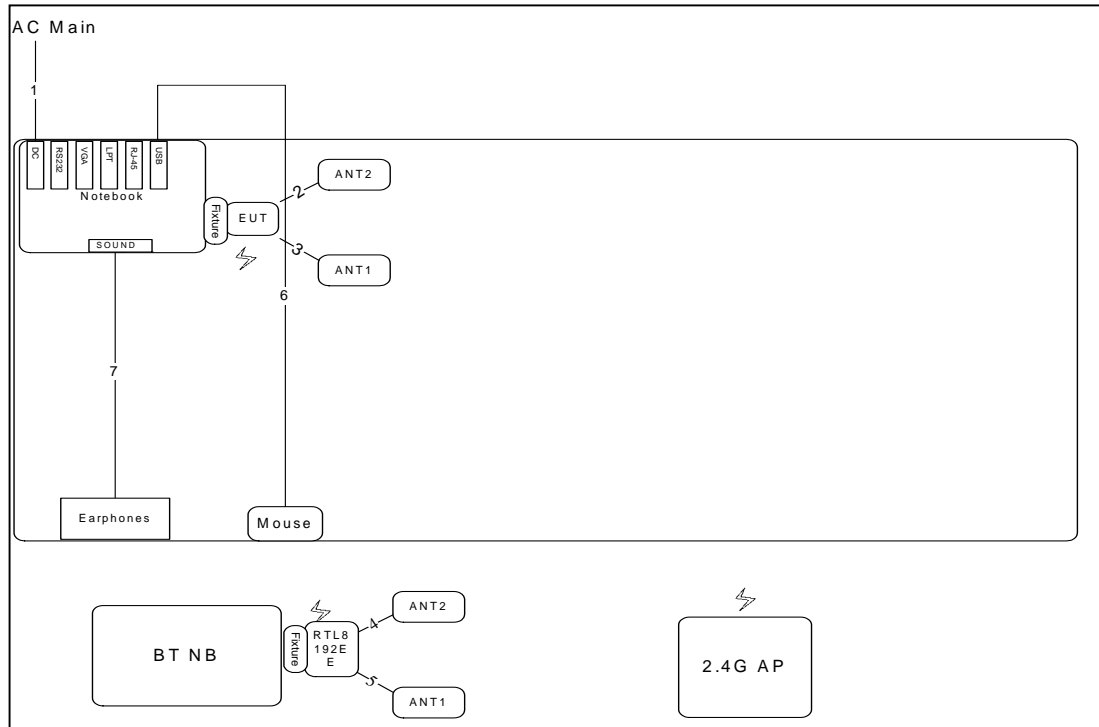

Item	Connection	Shield	Length
1	Power cable	No	2.6m
2	ANT cable	Yes	0.2m
3	ANT cable	Yes	0.2m
4	ANT cable	Yes	0.2m
5	ANT cable	Yes	0.2m
6	USB cable	No	1.8m
7	Audio cable	No	1.1m


### 3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

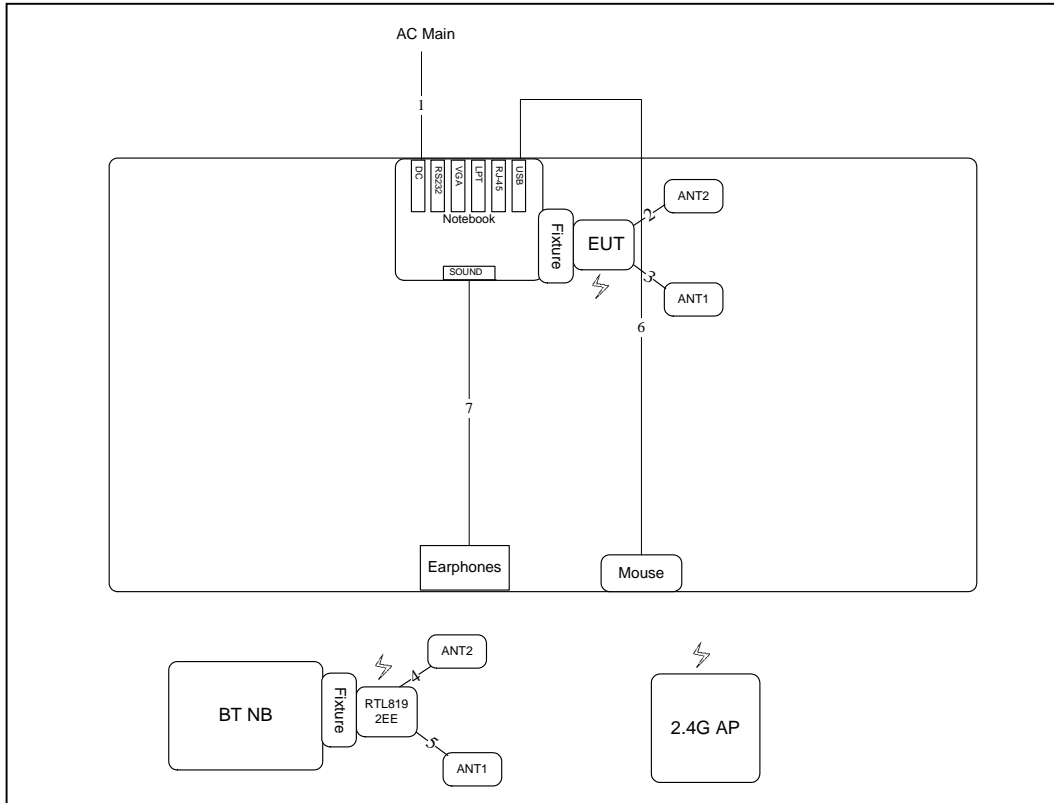

Item	Connection	Shield	Length
1	Power cable	No	2.6m
2	ANT cable	Yes	0.2m
3	ANT cable	Yes	0.2m
4	ANT cable	Yes	0.2m
5	ANT cable	Yes	0.2m
6	USB cable	No	1.8m
7	Audio cable	No	1.1m

Test Configuration: above 1GHz

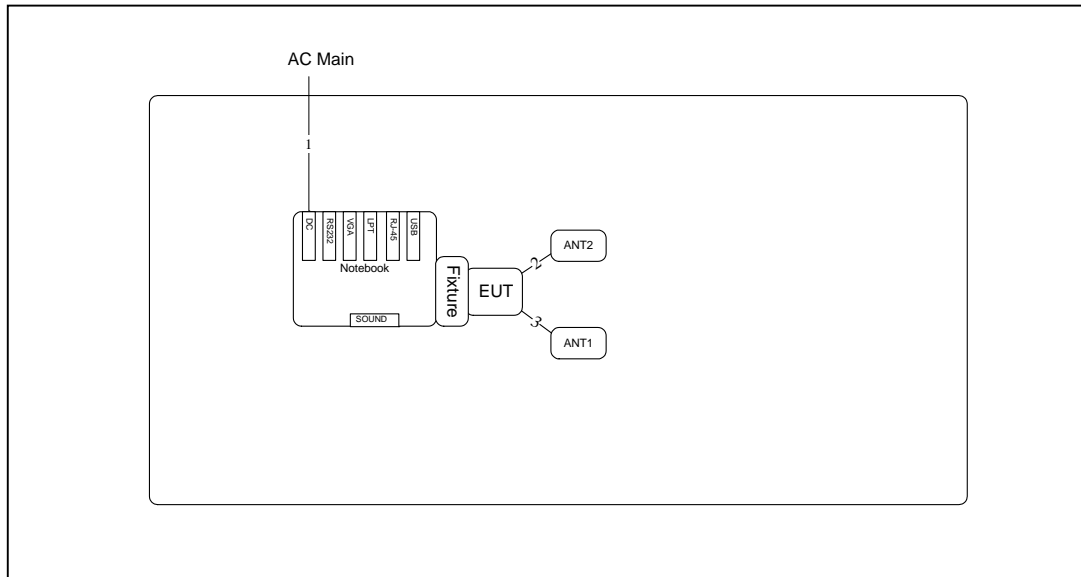

Item	Connection	Shield	Length
1	Power cable	No	2.6m
2	ANT cable	Yes	0.2m
3	ANT cable	Yes	0.2m



## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

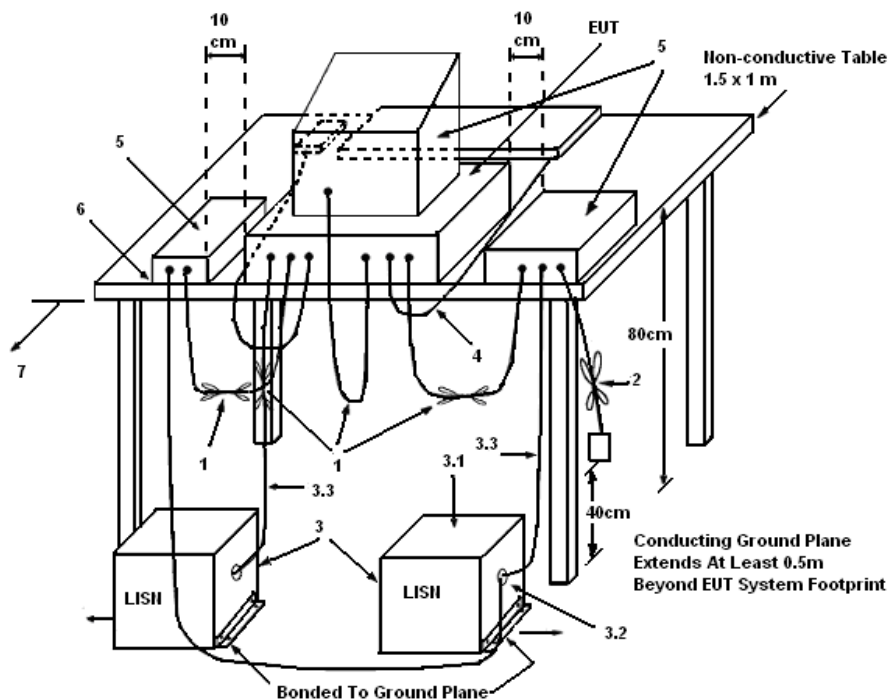

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement


Temperature	25°C	Humidity	60%
Test Engineer	Parody Lin	Phase	Line
Configuration	Normal Link	Test Mode	Mode 3

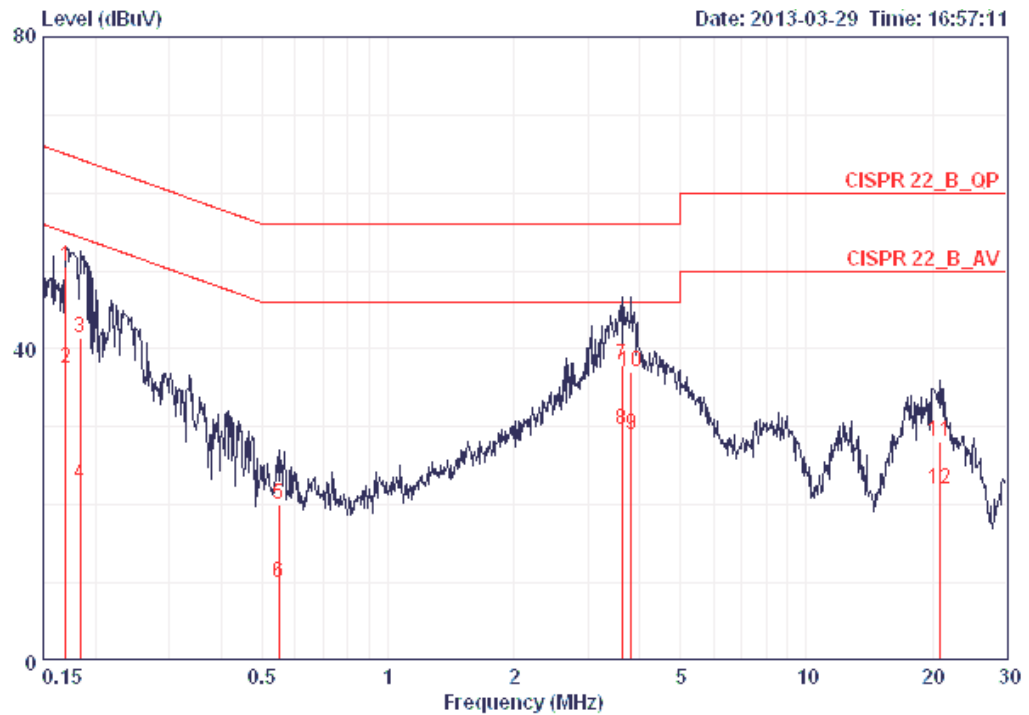

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	

1	0.16944	50.64	-14.35	64.99	50.29	0.16	0.19	QP
2	0.16944	37.43	-17.56	54.99	37.08	0.16	0.19	AVERAGE
3	0.18346	41.43	-22.89	64.33	41.09	0.15	0.19	QP
4	0.18346	22.65	-31.67	54.33	22.31	0.15	0.19	AVERAGE
5	0.54934	20.00	-36.01	56.00	19.64	0.16	0.20	QP
6	0.54934	9.93	-36.08	46.00	9.57	0.16	0.20	AVERAGE
7	3.623	37.83	-18.17	56.00	37.33	0.21	0.28	QP
8	3.623	29.60	-16.40	46.00	29.10	0.21	0.28	AVERAGE
9	3.820	29.02	-16.98	46.00	28.51	0.22	0.29	AVERAGE
10	3.820	37.01	-18.99	56.00	36.50	0.22	0.29	QP
11	20.924	28.12	-31.88	60.00	27.12	0.50	0.50	QP
12	20.924	22.00	-28.00	50.00	21.00	0.50	0.50	AVERAGE

Temperature	25°C	Humidity	60%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 3

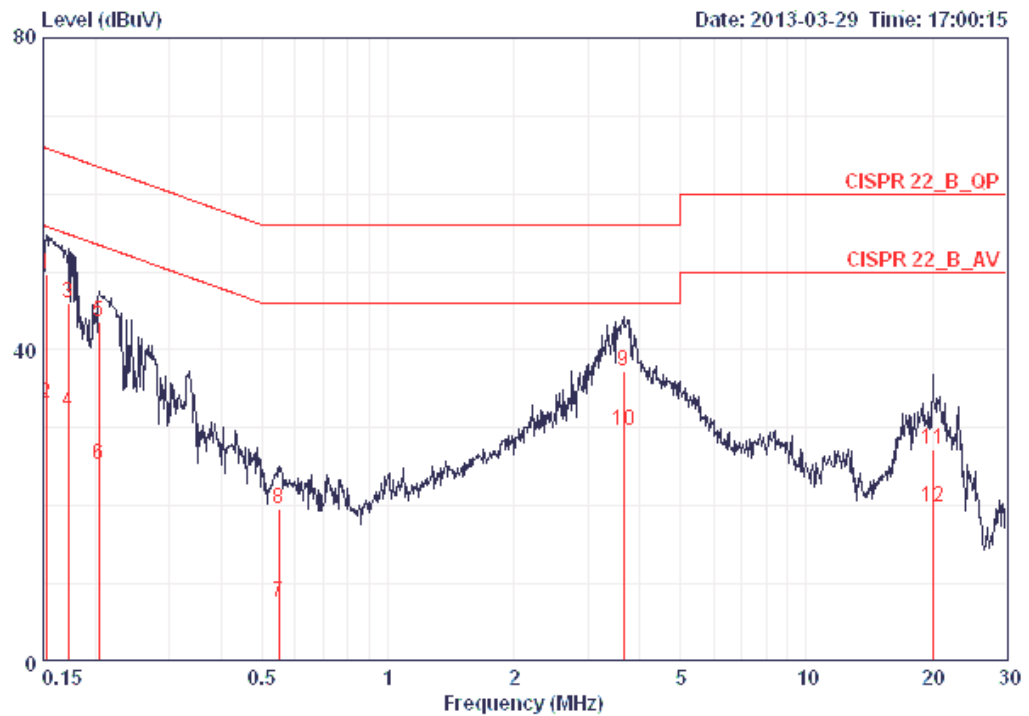

	Over	Limit	Read	LISN	Cable			
1	2	3	4	5	6	7		
8	9	10	11	12	13	14		
15	16	17	18	19	20	21		
22	23	24	25	26	27	28		
29	30	31	32	33	34	35		
36	37	38	39	40	41	42		
43	44	45	46	47	48	49		
50	51	52	53	54	55	56		
57	58	59	60	61	62	63		
64	65	66	67	68	69	70		
71	72	73	74	75	76	77		
78	79	80	81	82	83	84		
85	86	87	88	89	90	91		
92	93	94	95	96	97	98		
99	100	101	102	103	104	105		
106	107	108	109	110	111	112		
113	114	115	116	117	118	119		
120	121	122	123	124	125	126		
127	128	129	130	131	132	133		
134	135	136	137	138	139	140		
141	142	143	144	145	146	147		
148	149	150	151	152	153	154		
155	156	157	158	159	160	161		
162	163	164	165	166	167	168		
169	170	171	172	173	174	175		
176	177	178	179	180	181	182		
183	184	185	186	187	188	189		
190	191	192	193	194	195	196		
197	198	199	200	201	202	203		
204	205	206	207	208	209	210		
211	212	213	214	215	216	217		
218	219	220	221	222	223	224		
225	226	227	228	229	230	231		
232	233	234	235	236	237	238		
239	240	241	242	243	244	245		
246	247	248	249	250	251	252		
253	254	255	256	257	258	259		
260	261	262	263	264	265	266		
267	268	269	270	271	272	273		
274	275	276	277	278	279	280		
281	282	283	284	285	286	287		
288	289	290	291	292	293	294		
295	296	297	298	299	300	301		
302	303	304	305	306	307	308		
309	310	311	312	313	314	315		
316	317	318	319	320	321	322		
323	324	325	326	327	328	329		
330	331	332	333	334	335	336		
337	338	339	340	341	342	343		
344	345	346	347	348	349	350		
351	352	353	354	355	356	357		
358	359	360	361	362	363	364		
365	366	367	368	369	370	371		
372	373	374	375	376	377	378		
379	380	381	382	383	384	385		
386	387	388	389	390	391	392		
393	394	395	396	397	398	399		
400	401	402	403	404	405	406		
407	408	409	410	411	412	413		
414	415	416	417	418	419	420		
421	422	423	424	425	426	427		
428	429	430	431	432	433	434		
435	436	437	438	439	440	441		
442	443	444	445	446	447	448		
449	450	451	452	453	454	455		
456	457	458	459	460	461	462		
463	464	465	466	467	468	469		
470	471	472	473	474	475	476		
477	478	479	480	481	482	483		
484	485	486	487	488	489	490		
491	492	493	494	495	496	497		
498	499	500	501	502	503	504		
505	506	507	508	509	510	511		
512	513	514	515	516	517	518		
519	520	521	522	523	524	525		
526	527	528	529	530	531	532		
533	534	535	536	537	538	539		
540	541	542	543	544	545	546		
547	548	549	550	551	552	553		
554	555	556	557	558	559	560		
561	562	563	564	565	566	567		
568	569	570	571	572	573	574		
575	576	577	578	579	580	581		
582	583	584	585	586	587	588		
589	590	591	592	593	594	595		
596	597	598	599	600	601	602		
603	604	605	606	607	608	609		
610	611	612	613	614	615	616		
617	618	619	620	621	622	623		
624	625	626	627	628	629	630		
631	632	633	634	635	636	637		
638	639	640	641	642	643	644		
645	646	647	648	649	650	651		
652	653	654	655	656	657	658		
659	660	661	662	663	664	665		
666	667	668	669	670	671	672		
673	674	675	676	677	678	679		
680	681	682	683	684	685	686		
687	688	689	690	691	692	693		
694	695	696	697	698	699	700		
701	702	703	704	705	706	707		
708	709	710	711	712	713	714		
715	716	717	718	719	720	721		
722	723	724	725	726	727	728		
729	730	731	732	733	734	735		
736	737	738	739	740	741	742		
743	744	745	746	747	748	749		
750	751	752	753	754	755	756		
757	758	759	760	761	762	763		
764	765	766	767	768	769	770		
771	772	773	774	775	776	777		
778	779	780	781	782	783	784		
785	786	787	788	789	790	791		
792	793	794	795	796	797	798		
799	800	801	802	803	804	805		
806	807	808	809	810	811	812		
813	814	815	816	817	818	819		
820	821	822	823	824	825	826		
827	828	829	830	831	832	833		
834	835	836	837	838	839	840		
841	842	843	844	845	846	847		
848	849	850	851	852	853	854		
855	856	857	858	859	860	861		
862	863	864	865	866	867	868		
869	870	871	872	873	874	875		
876	877	878	879	880	881	882		
883	884	885	886	887	888	889		
890	891	892	893	894	895	896		
897	898	899	900	901	902	903		
904	905	906	907	908	909	910		
911	912	913	914	915	916	917		
918	919	920	921	922	923	924		
925	926	927	928	929	930	931		
932	933	934	935	936	937	938		
939	940	941	942	943	944	945		
946	947	948	949	950	951	952		
953	954	955	956	957	958	959		
960	961	962	963	964	965	966		
967	968	969	970	971	972	973		
974	975	976	977	978	979	980		
981	982	983	984	985	986	987		
988	989	990	991	992	993	994		
995	996	997	998	999	1000			
1	0.15240	49.78	-16.09	65.87	49.52	0.08	0.18	QP
2	0.15240	33.04	-22.83	55.87	32.78	0.08	0.18	AVERAGE
3	0.17215	46.03	-18.83	64.86	45.76	0.08	0.19	QP
4	0.17215	31.95	-22.91	54.86	31.68	0.08	0.19	AVERAGE
5	0.20396	43.54	-19.91	63.45	43.26	0.08	0.20	QP
6	0.20396	25.37	-28.08	53.45	25.09	0.08	0.20	AVERAGE
7	0.54934	7.67	-38.33	46.00	7.39	0.08	0.20	AVERAGE
8	0.54934	19.64	-36.36	56.00	19.36	0.08	0.20	QP
9	3.661	37.17	-18.83	56.00	36.76	0.13	0.28	QP
10	3.661	29.61	-16.39	46.00	29.20	0.13	0.28	AVERAGE
11	20.056	27.35	-32.65	60.00	26.46	0.39	0.50	QP
12	20.056	19.80	-30.20	50.00	18.91	0.39	0.50	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

### 4.2.3. Test Procedures

1. Test procedures refer KDB558074 v01 r02 section 8.2.3 option 3.
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout



### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n
Test Date	Mar. 25, 2013		

For 1TX

Configuration IEEE 802.11n MCS0 20MHz / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	15.62	30.00	Complies
6	2437 MHz	18.87	30.00	Complies
11	2462 MHz	15.48	30.00	Complies

For 2TX

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 1	Chain 2			
1	2412 MHz	14.18	14.15	17.18	30.00	Complies
6	2437 MHz	18.71	18.75	21.74	30.00	Complies
11	2462 MHz	13.33	13.72	16.54	30.00	Complies

Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 1	Chain 2			
1	2412 MHz	14.34	14.02	17.19	30.00	Complies
6	2437 MHz	18.77	18.65	21.72	30.00	Complies
11	2462 MHz	15.63	15.72	18.69	30.00	Complies

## For 1TX

## Configuration IEEE 802.11n MCS0 40MHz / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	14.49	30.00	Complies
6	2437 MHz	17.82	30.00	Complies
9	2452 MHz	14.81	30.00	Complies

## For 2TX

## Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 1	Chain 2			
3	2422 MHz	10.60	10.70	13.66	30.00	Complies
6	2437 MHz	14.28	14.63	17.47	30.00	Complies
9	2452 MHz	11.68	11.93	14.82	30.00	Complies

## Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 1	Chain 2			
3	2422 MHz	13.20	13.00	16.11	30.00	Complies
6	2437 MHz	16.30	16.42	19.37	30.00	Complies
9	2452 MHz	13.09	13.18	16.15	30.00	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11b/g
<b>Test Date</b>	Mar. 25, 2013		

For 1TX

Configuration IEEE 802.11b / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.71	30.00	Complies
6	2437 MHz	18.98	30.00	Complies
11	2462 MHz	17.64	30.00	Complies

For 1TX

Configuration IEEE 802.11g / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	15.46	30.00	Complies
6	2437 MHz	18.92	30.00	Complies
11	2462 MHz	15.35	30.00	Complies

For 2TX

Configuration IEEE 802.11g / Chain 1 + Chain 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 1	Chain 2			
1	2412 MHz	14.20	14.00	17.11	30.00	Complies
6	2437 MHz	18.61	18.46	21.55	30.00	Complies
11	2462 MHz	15.57	15.39	18.49	30.00	Complies



### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RB	$\geq 3$ kHz
VB	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

#### 4.3.3. Test Procedures

1. Test procedures refer KDB 558074 v01 r02 section 9.1 option 1 & KDB662911 D01 Multiple Transmitter Output v01r02 section In-Band Power Spectral Density (PSD) Measurements option (2) Measure and add  $10 \log(NANT)$  dB.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times$  span/RBW (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8$  dBm.

#### 4.3.4. Test Setup Layout

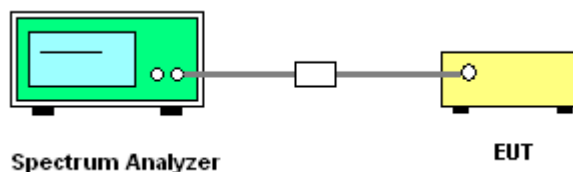

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n

For 1TX

Configuration IEEE 802.11n MCS0 20MHz / Chain 1

Channel	Frequency	Power Density (dBm/3kHz)	Single Port Limit (dBm/3kHz)	Result
1	2412 MHz	-12.54	8.00	Complies
6	2437 MHz	-9.13	8.00	Complies
11	2462 MHz	-12.09	8.00	Complies

For 2TX

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 & Chain 2

Channel	Frequency	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Chain 1	Chain 2		
1	2412 MHz	-13.96	-14.23	4.99	Complies
6	2437 MHz	-9.08	-9.79	4.99	Complies
11	2462 MHz	-15.68	-14.73	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2))) = 4.99dBm/3kHz

Configuration IEEE 802.11n MCS8 20MHz / Chain 1 & Chain 2

Channel	Frequency	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Chain 1	Chain 2		
1	2412 MHz	-13.35	-14.34	4.99	Complies
6	2437 MHz	-8.74	-9.42	4.99	Complies
11	2462 MHz	-12.22	-12.53	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2))) = 4.99dBm/3kHz

## For 1TX

## Configuration IEEE 802.11n MCS0 40MHz / Chain 1

Channel	Frequency	Power Density (dBm/3kHz)	Single Port Limit (dBm/3kHz)	Result
3	2422 MHz	-15.50	8.00	Complies
6	2437 MHz	-11.42	8.00	Complies
9	2452 MHz	-16.18	8.00	Complies

## For 2TX

## Configuration IEEE 802.11n MCS0 40MHz / Chain 1 &amp; Chain 2

Channel	Frequency	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Chain 1	Chain 2		
3	2422 MHz	-17.28	-16.66	4.99	Complies
6	2437 MHz	-15.75	-14.39	4.99	Complies
9	2452 MHz	-18.75	-19.39	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2))) = 4.99dBm/3kHz

## Configuration IEEE 802.11n MCS8 40MHz / Chain 1 &amp; Chain 2

Channel	Frequency	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Chain 1	Chain 2		
3	2422 MHz	-15.57	-15.68	4.99	Complies
6	2437 MHz	-14.95	-14.37	4.99	Complies
9	2452 MHz	-16.49	-17.26	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2))) = 4.99dBm/3kHz

Temperature	25°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b/g

For 1TX

Configuration IEEE 802.11b / Chain 1

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-12.79	8.00	Complies
6	2437 MHz	-11.40	8.00	Complies
11	2462 MHz	-13.01	8.00	Complies

For 1TX

Configuration IEEE 802.11g / Chain 1

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-12.02	8.00	Complies
6	2437 MHz	-9.69	8.00	Complies
11	2462 MHz	-12.23	8.00	Complies

For 2TX

Configuration IEEE 802.11g / Chain 1 & Chain 2


Channel	Frequency	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Chain 1	Chain 2		
1	2412 MHz	-14.02	-15.26	4.99	Complies
6	2437 MHz	-10.51	-10.12	4.99	Complies
11	2462 MHz	-13.07	-13.36	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2))) = 4.99dBm/3kHz

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

## Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 / 2437 MHz / 1TX

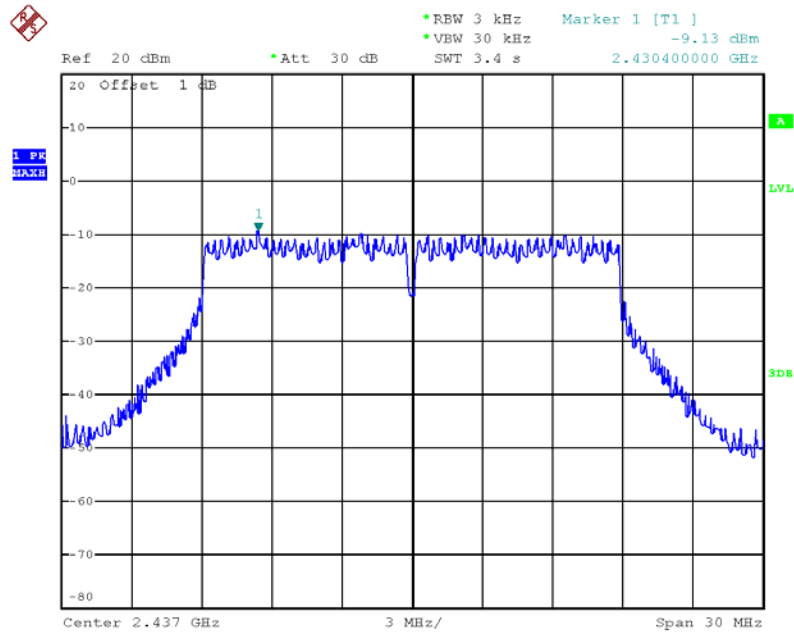


Date: 25.MAR.2013 21:47:57

## Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 / 2437 MHz / 2TX

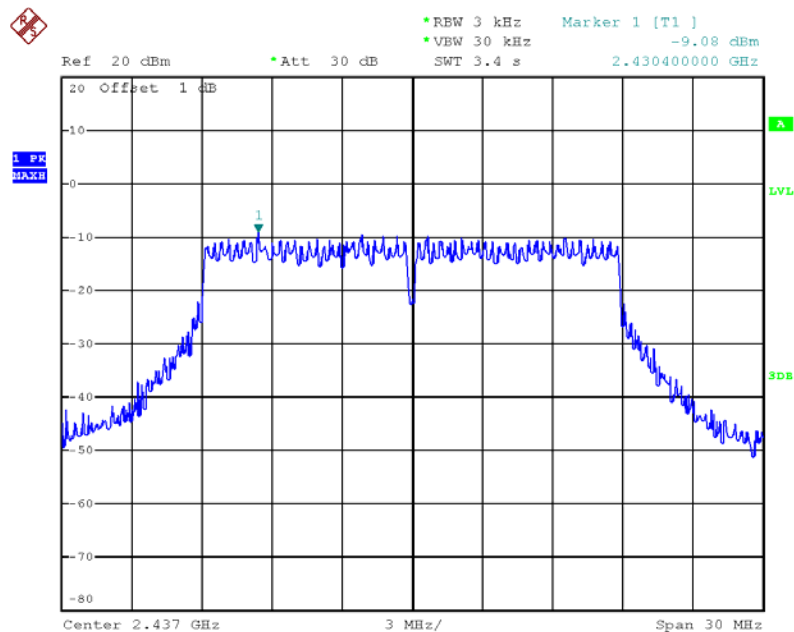


Date: 25.MAR.2013 23:27:20

**Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 / 2437 MHz / 2TX**

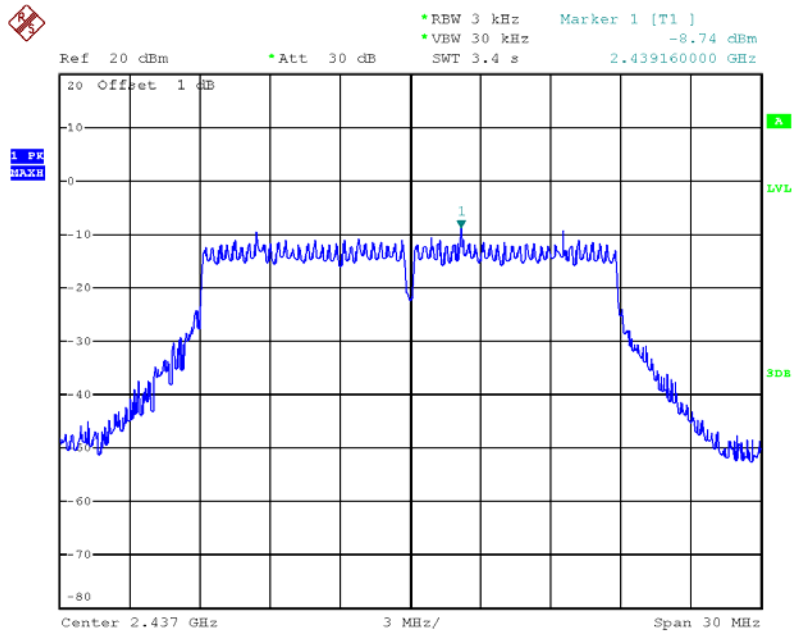


Date: 25.MAR.2013 22:57:48

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 2437 MHz / 1TX**

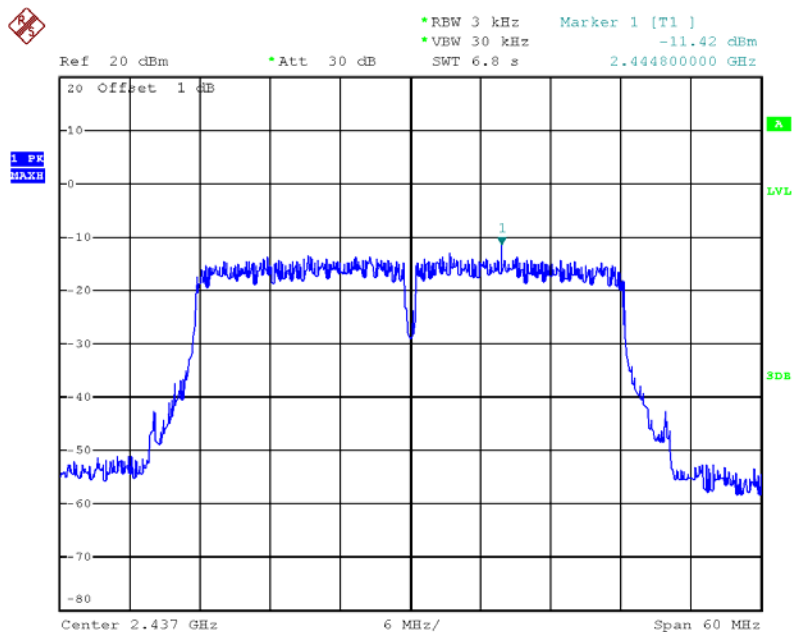


Date: 25.MAR.2013 21:51:42

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 2 / 2437 MHz / 2TX**

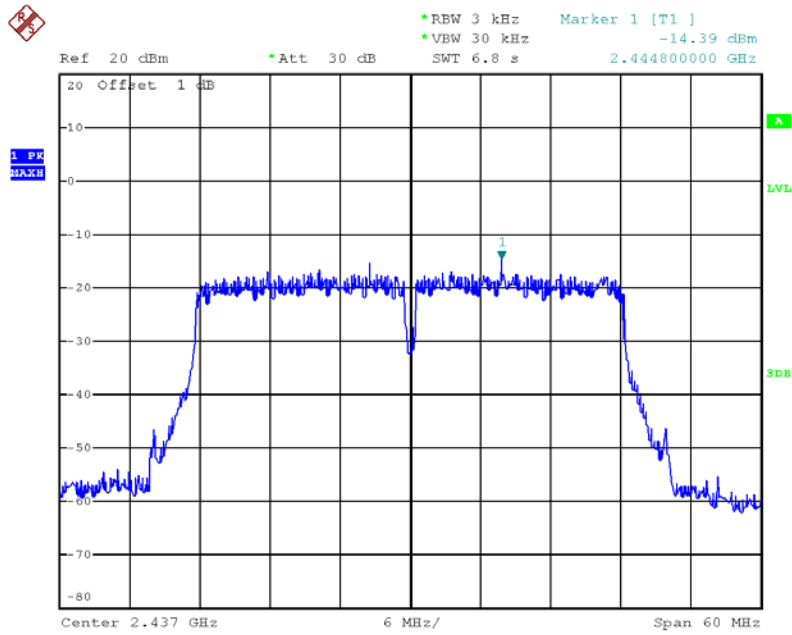

Date: 25.MAR.2013 23:16:16


**Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 2 / 2437 MHz / 2TX**

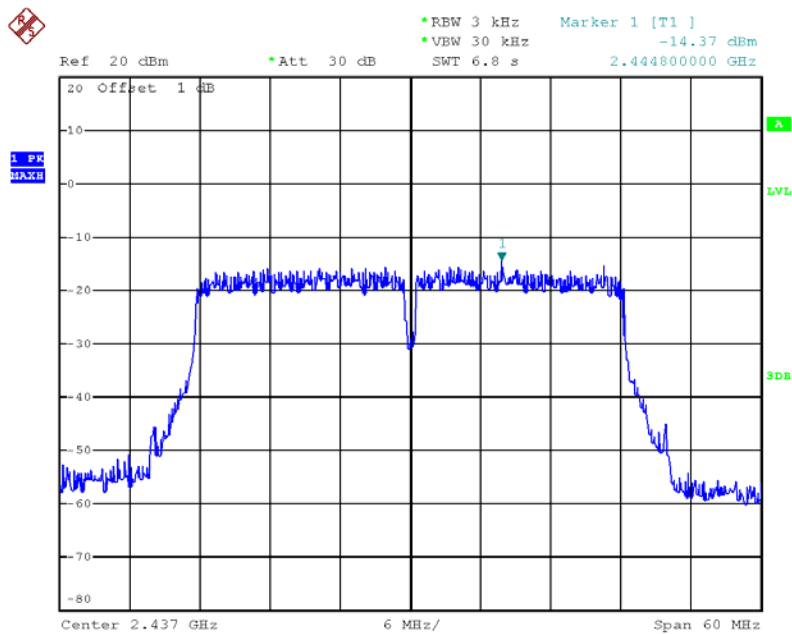

Date: 25.MAR.2013 23:04:24




**Power Density Plot on Configuration IEEE 802.11b / Chain 1 / 2437 MHz / 1TX**

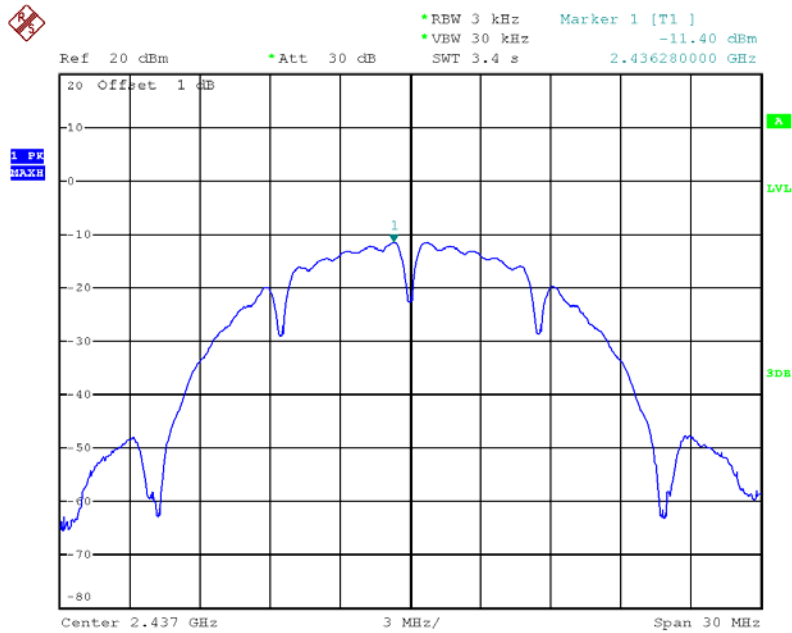


Date: 25.MAR.2013 21:40:05

**Power Density Plot on Configuration IEEE 802.11g / Chain 1 / 2437 MHz / 1TX**

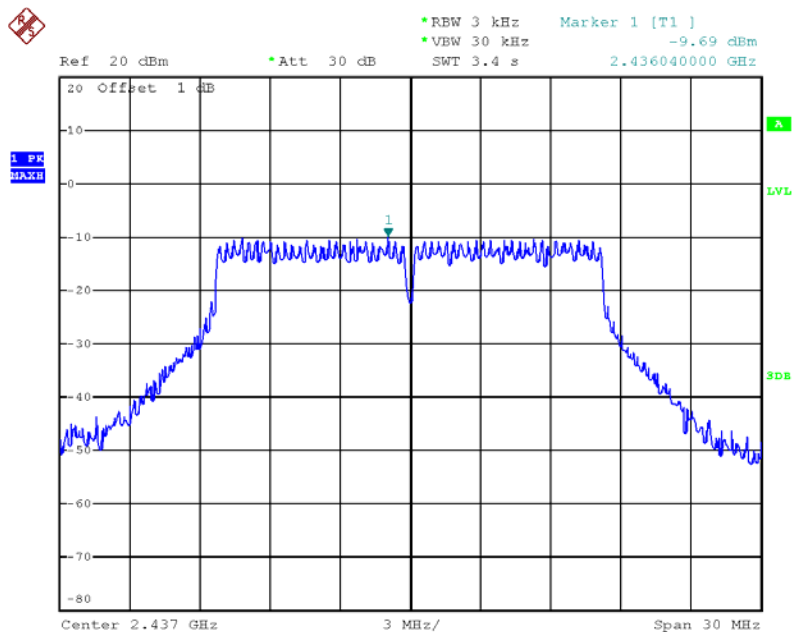

Date: 25.MAR.2013 21:43:29

### Power Density Plot on Configuration IEEE 802.11g / Chain 2 / 2437 MHz / 2TX

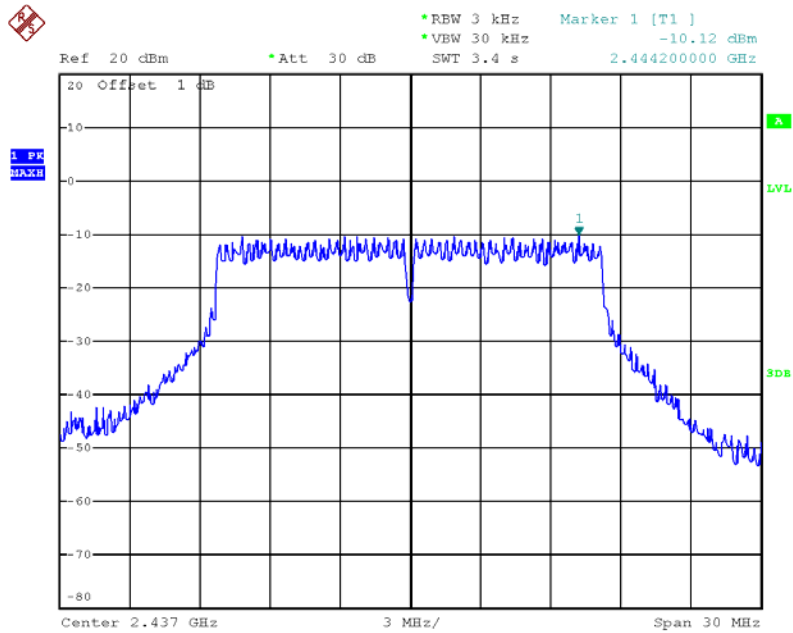

Date: 25.MAR.2013 22:17:24

#### 4.4. 6dB Spectrum Bandwidth Measurement

##### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

##### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	1-5 % or DTS BW, not exceed 100KHz
VB	$\geq 3 \times RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

##### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 5.1.1 EBW Measurement Procedure
3. Multiple antenna system was performed in accordance with KDB 662911 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

##### 4.4.4. Test Setup Layout

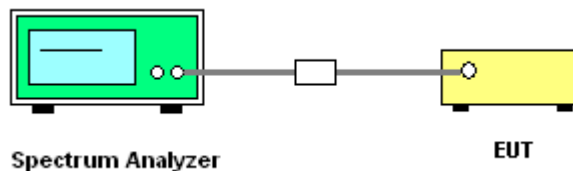

##### 4.4.5. Test Deviation

There is no deviation with the original standard.

##### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n

For 1TX

Configuration IEEE 802.11n MCS0 20MHz / Chain 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.84	17.76	500	Complies
6	2437 MHz	17.84	17.84	500	Complies
11	2462 MHz	17.84	17.76	500	Complies

For 2TX

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.84	17.76	500	Complies
6	2437 MHz	17.84	17.84	500	Complies
11	2462 MHz	17.84	17.76	500	Complies

Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.76	17.76	500	Complies
6	2437 MHz	17.76	17.76	500	Complies
11	2462 MHz	17.84	17.76	500	Complies

## For 1TX

## Configuration IEEE 802.11n MCS0 40MHz / Chain 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.48	36.16	500	Complies
6	2437 MHz	36.48	36.16	500	Complies
9	2452 MHz	36.48	36.16	500	Complies

## For 2TX

## Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.48	36.32	500	Complies
6	2437 MHz	36.48	36.16	500	Complies
9	2452 MHz	36.48	36.16	500	Complies

## Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.48	36.32	500	Complies
6	2437 MHz	36.48	36.32	500	Complies
9	2452 MHz	36.48	36.16	500	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11b/g

For 1TX

Configuration IEEE 802.11b / Chain 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	10.08	14.96	500	Complies
6	2437 MHz	10.08	15.04	500	Complies
11	2462 MHz	10.08	14.96	500	Complies

For 1TX

Configuration IEEE 802.11g / Chain 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.56	16.56	500	Complies
6	2437 MHz	16.56	16.56	500	Complies
11	2462 MHz	16.56	16.56	500	Complies

For 2TX


Configuration IEEE 802.11g / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.56	16.72	500	Complies
6	2437 MHz	12.64	16.16	500	Complies
11	2462 MHz	16.56	16.80	500	Complies


Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 / 2437 MHz / 1TX

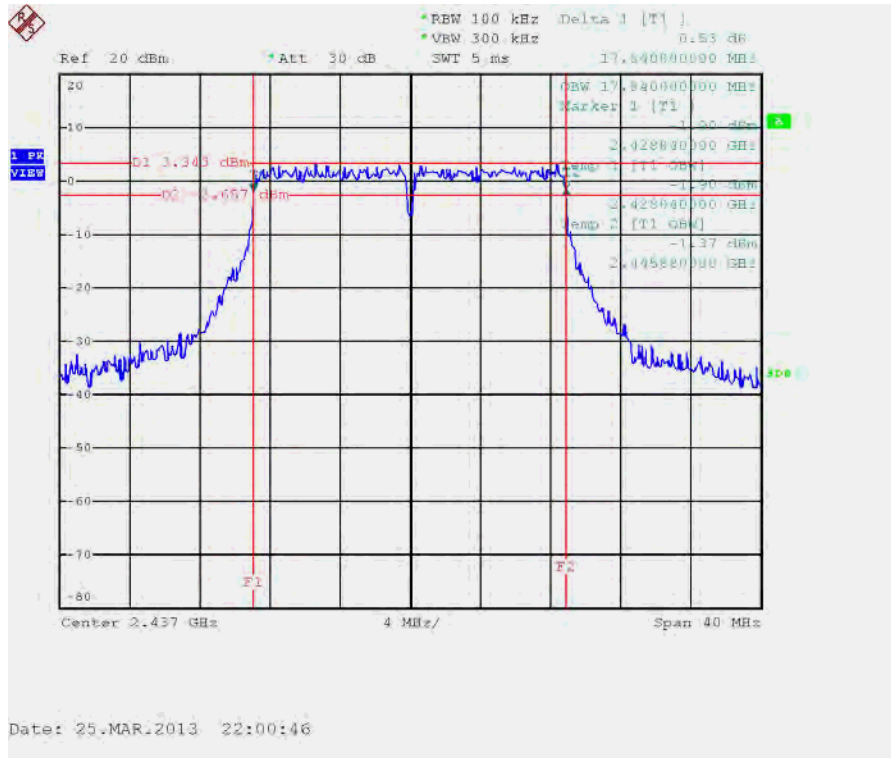


6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 2437 MHz / 2TX

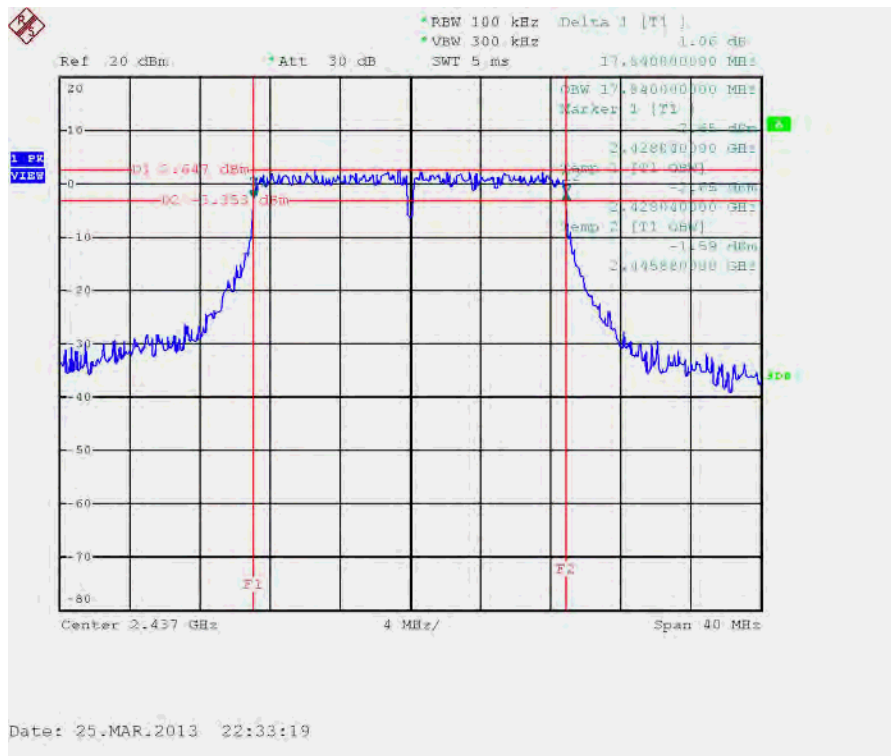

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2 / 2437 MHz / 2TX

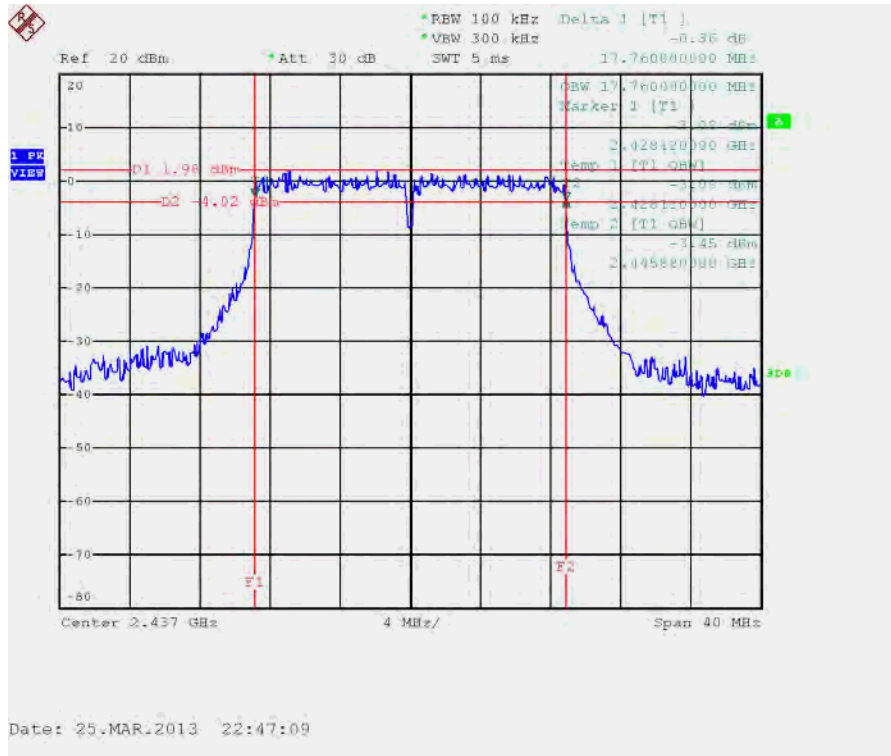


6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 2437 MHz / 1TX

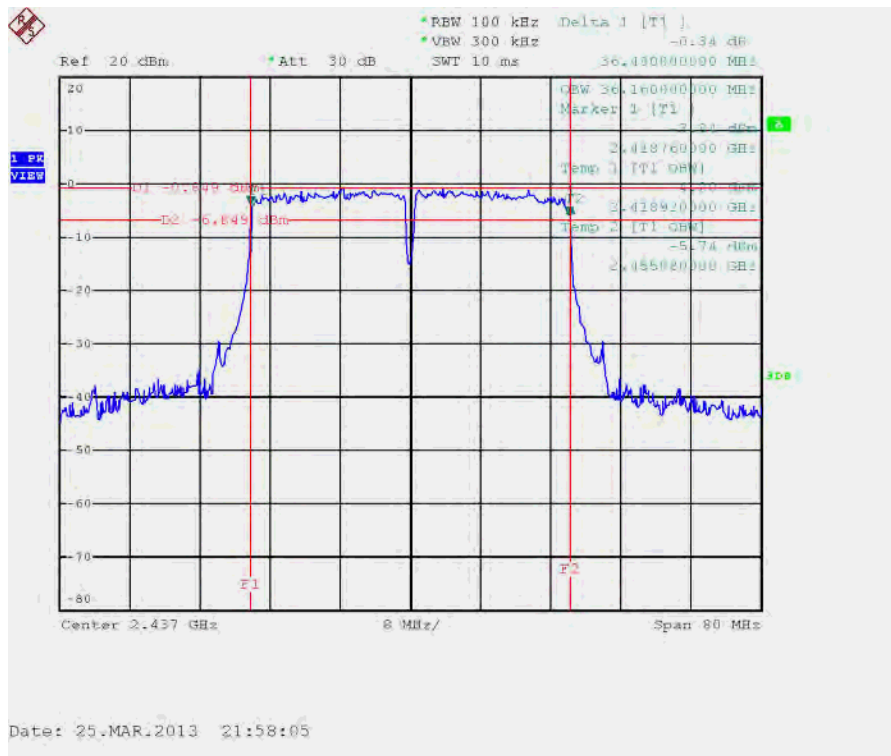





6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 2437 MHz / 2TX

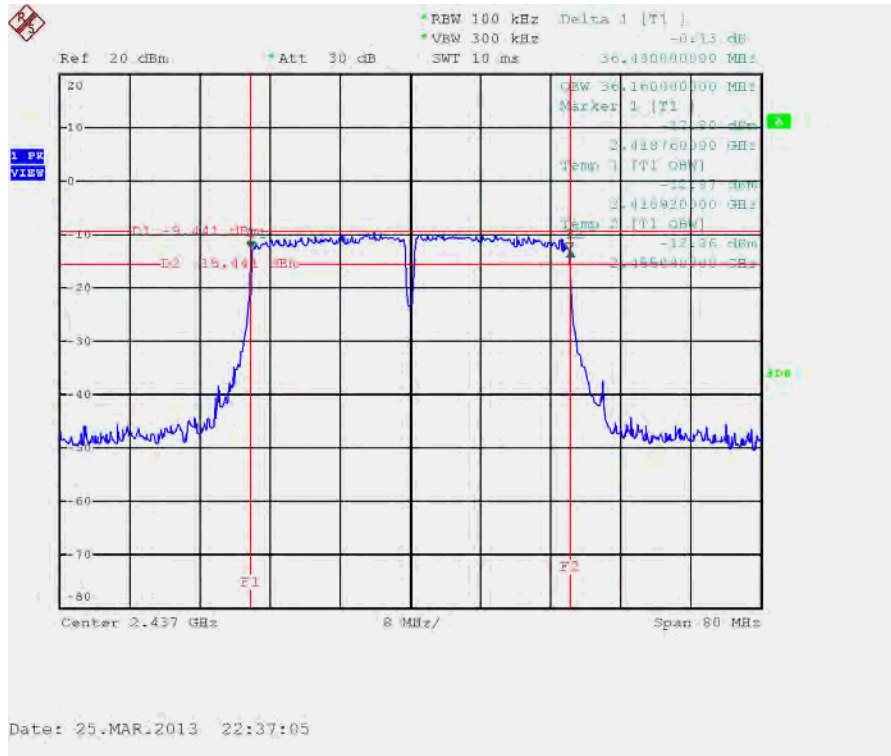


6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 / 2437 MHz / 2TX

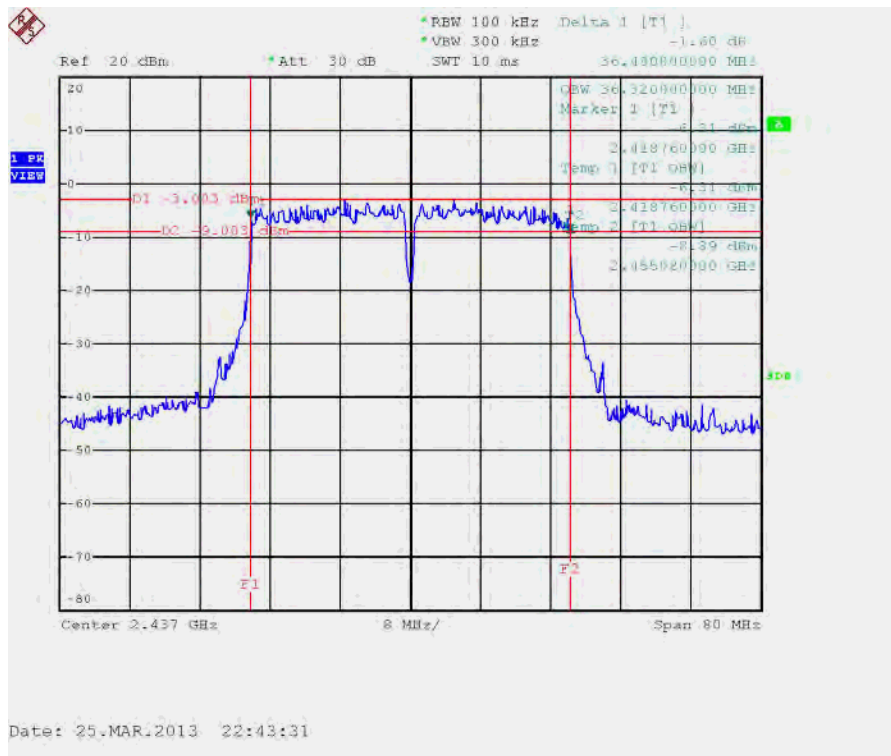


6 dB Bandwidth Plot on Configuration IEEE 802.11b / Chain 1 / 2437 MHz / 1TX

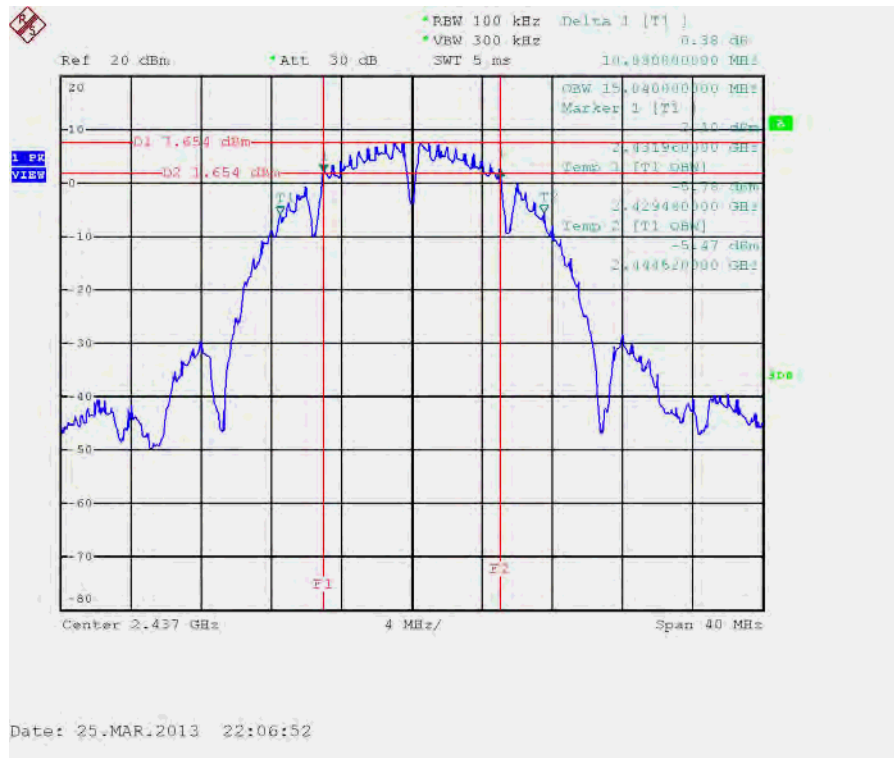

6 dB Bandwidth Plot on Configuration IEEE 802.11g / Chain 1 / 2437 MHz / 1TX

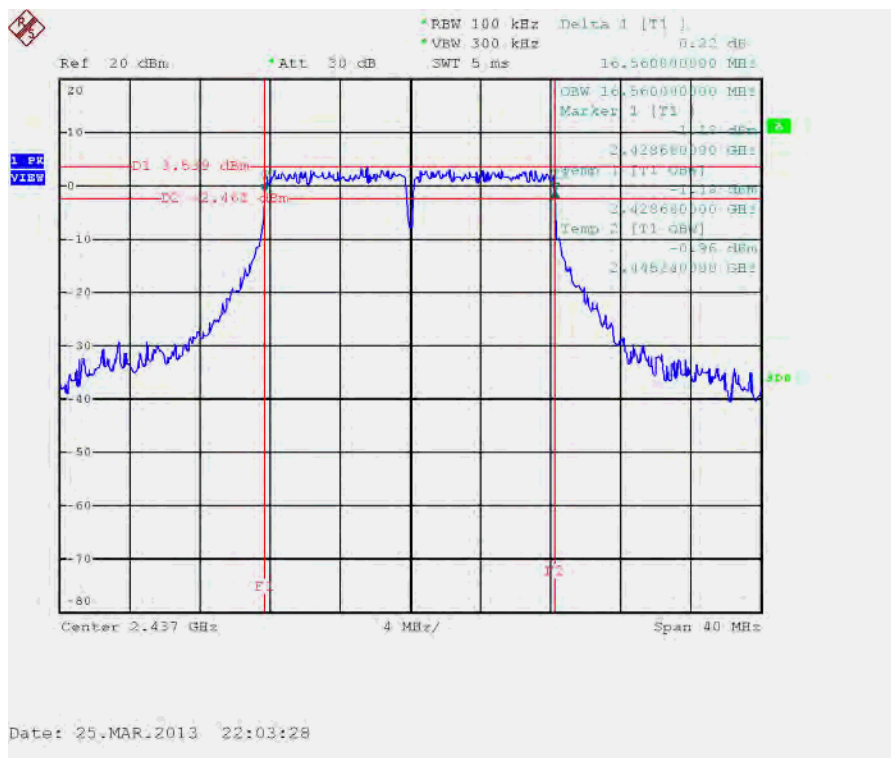

6 dB Bandwidth Plot on Configuration IEEE 802.11g / Chain 1 + Chain 2 / 2437 MHz / 2TX

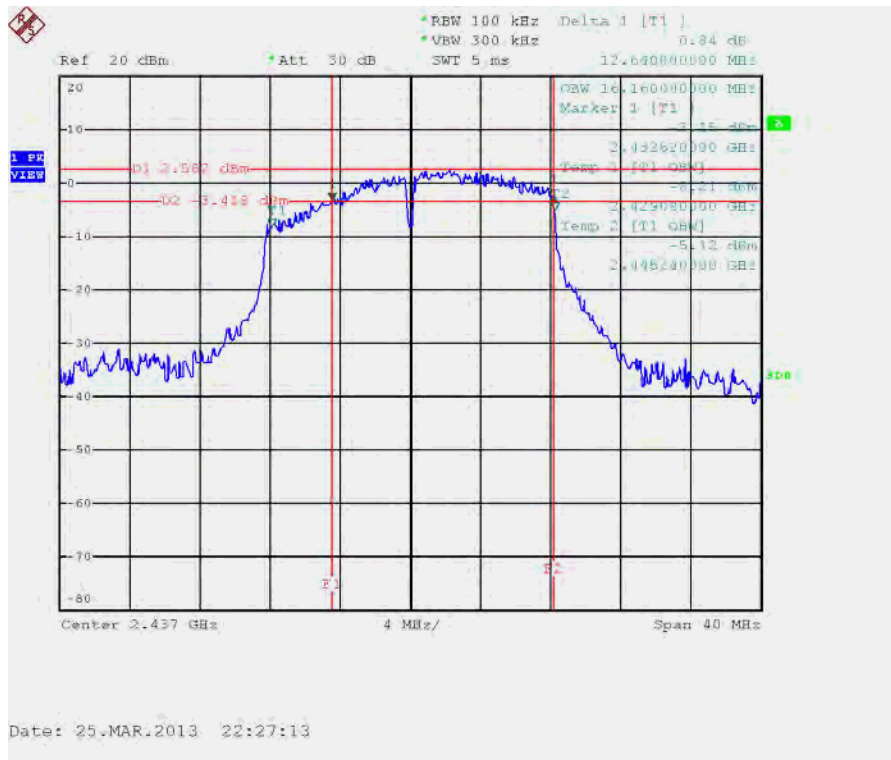

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout

For Radiated Emissions below 1GHz

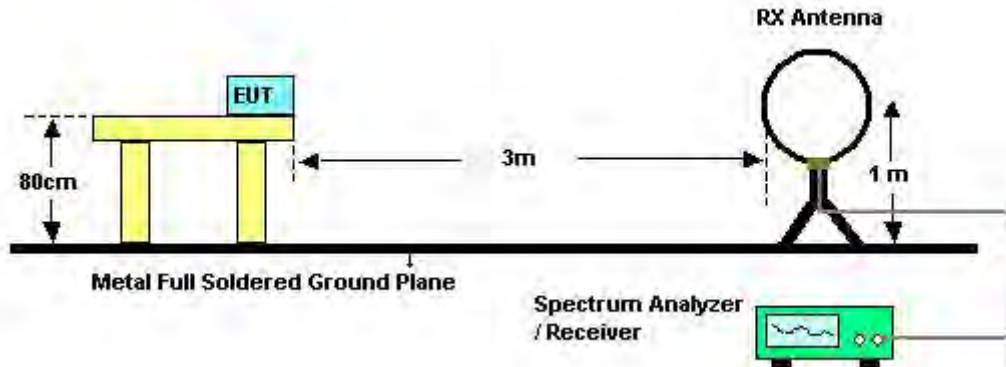

For Radiated Emissions above 1GHz

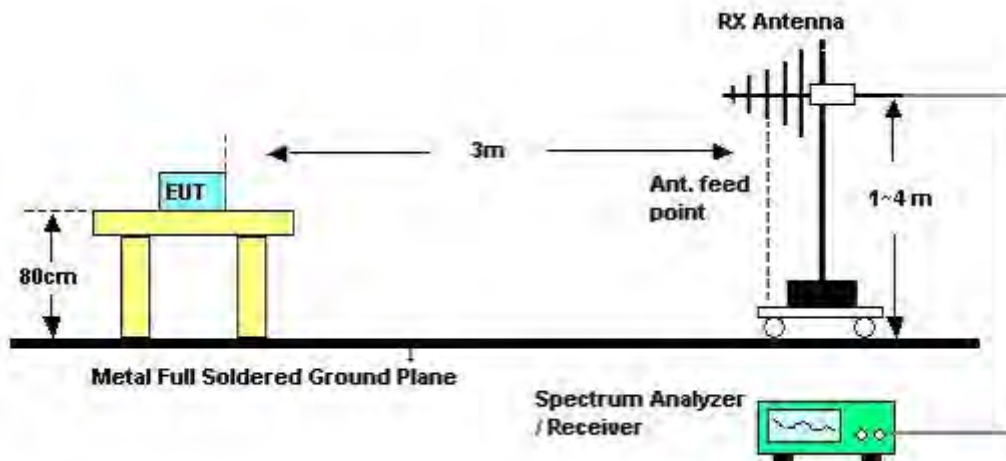

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	Normal Link
Test Date	Apr. 08, 2013	Test Mode	Mode 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	Normal Link
Test Mode	Mode 1		


Horizontal

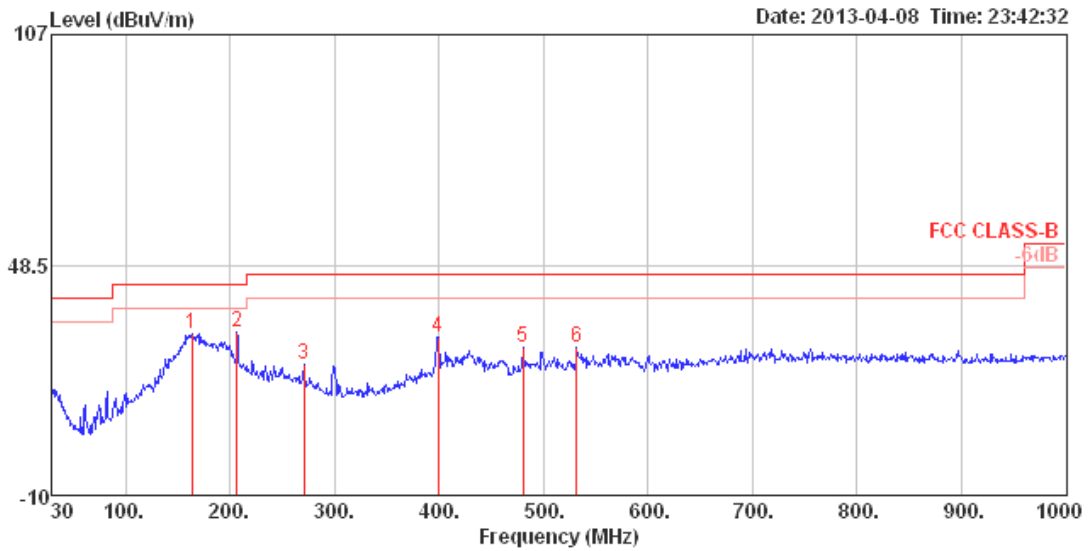

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	163.86	31.07	43.50	-12.43	51.61	1.55	9.46	31.55	300	2	HORIZONTAL	Peak
2	206.54	31.63	43.50	-11.87	52.65	1.75	8.68	31.45	125	360	HORIZONTAL	Peak
3	270.56	23.21	46.00	-22.79	40.40	1.99	12.37	31.55	125	355	HORIZONTAL	Peak
4	399.57	30.13	46.00	-15.87	43.24	2.49	15.86	31.46	100	0	HORIZONTAL	Peak
5	480.08	27.70	46.00	-18.30	39.37	2.72	16.81	31.20	200	92	HORIZONTAL	Peak
6	531.49	27.35	46.00	-18.65	38.24	2.89	17.60	31.38	300	300	HORIZONTAL	Peak



**Vertical**

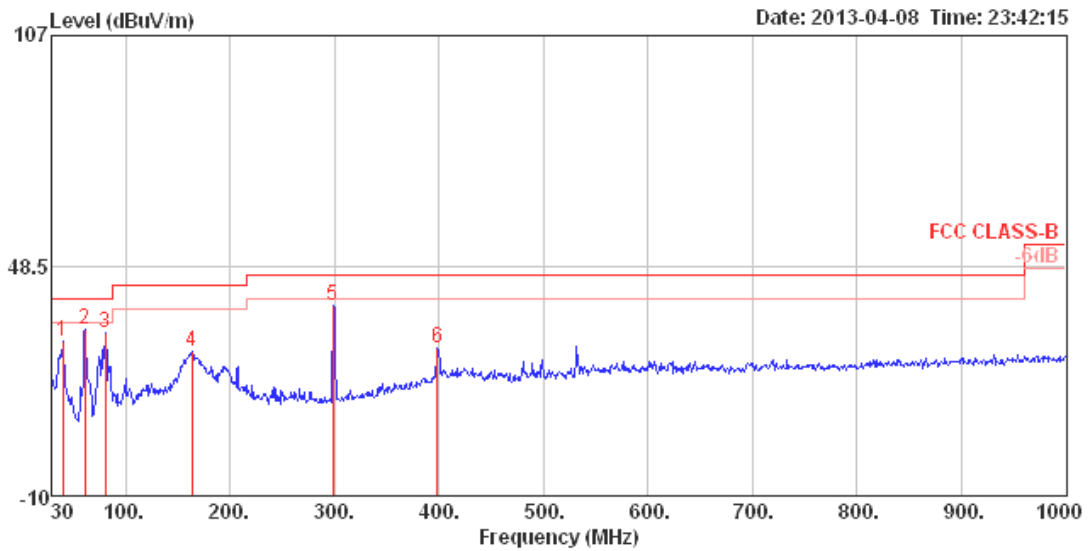

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	39.70	29.22	40.00	-10.78	47.93	0.74	12.43	31.88	400	240	VERTICAL	Peak
2	pp	61.04	32.50	-7.50	58.52	0.90	4.87	31.79	150	121	VERTICAL	Peak
3		80.44	31.62	-8.38	55.47	1.04	6.83	31.72	100	339	VERTICAL	Peak
4		163.86	26.61	-16.89	47.15	1.55	9.46	31.55	300	63	VERTICAL	Peak
5		298.69	38.40	-7.60	54.73	2.12	12.98	31.43	150	95	VERTICAL	Peak
6		398.60	27.50	-18.50	40.66	2.49	15.81	31.46	150	4	VERTICAL	Peak

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 1 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4824.44	42.21	74.00	-31.79	40.87	3.31	33.06	35.03	Peak	100	190	HORIZONTAL
2	4831.12	29.84	54.00	-24.16	28.50	3.31	33.06	35.03	Average	100	190	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4821.96	46.39	74.00	-27.61	45.05	3.31	33.06	35.03	Peak	167	270	VERTICAL
2	4823.84	33.95	54.00	-20.05	32.61	3.31	33.06	35.03	Average	167	270	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 6 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.04	55.09	74.00	-18.91	53.63	3.33	33.16	35.03	Peak	150	116	HORIZONTAL
2	4873.80	41.56	54.00	-12.44	40.10	3.33	33.16	35.03	Average	150	116	HORIZONTAL
3	7303.68	31.81	54.00	-22.19	27.23	4.06	35.92	35.40	Average	100	159	HORIZONTAL
4	7313.52	44.61	74.00	-29.39	39.99	4.06	35.96	35.40	Peak	100	159	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.04	56.49	74.00	-17.51	55.03	3.33	33.16	35.03	Peak	100	85	VERTICAL
2	4873.60	42.86	54.00	-11.14	41.40	3.33	33.16	35.03	Average	100	85	VERTICAL
3	7307.44	45.17	74.00	-28.83	40.55	4.06	35.96	35.40	Peak	100	66	VERTICAL
4	7314.40	32.04	54.00	-21.96	27.42	4.06	35.96	35.40	Average	100	66	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch11 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4915.32	44.21	74.00	-29.79	42.65	3.35	33.23	35.02	Peak	100	306	HORIZONTAL
2	4927.56	31.52	54.00	-22.48	29.92	3.35	33.26	35.01	Average	100	306	HORIZONTAL
3	7380.84	31.91	54.00	-22.09	27.16	4.06	36.09	35.40	Average	100	114	HORIZONTAL
4	7391.16	44.82	74.00	-29.18	40.07	4.06	36.09	35.40	Peak	100	114	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.00	49.05	74.00	-24.95	47.45	3.35	33.26	35.01	Peak	100	97	VERTICAL
2	4923.80	35.74	54.00	-18.26	34.14	3.35	33.26	35.01	Average	100	97	VERTICAL
3	7376.24	44.40	74.00	-29.60	39.65	4.06	36.09	35.40	Peak	100	143	VERTICAL
4	7393.12	32.04	54.00	-21.96	27.25	4.06	36.13	35.40	Average	100	143	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 1 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.16	46.11	74.00	-27.89	44.77	3.31	33.06	35.03	Peak	100	227	HORIZONTAL
2	4823.88	34.45	54.00	-19.55	33.11	3.31	33.06	35.03	Average	100	227	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4822.80	47.24	74.00	-26.76	45.90	3.31	33.06	35.03	Peak	100	258	VERTICAL
2	4823.88	35.46	54.00	-18.54	34.12	3.31	33.06	35.03	Average	100	258	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 6 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.08	48.76	74.00	-25.24	47.30	3.33	33.16	35.03	Peak	100	323	HORIZONTAL
2	4873.72	35.23	54.00	-18.77	33.77	3.33	33.16	35.03	Average	100	323	HORIZONTAL
3	7301.56	32.06	54.00	-21.94	27.48	4.06	35.92	35.40	Average	100	86	HORIZONTAL
4	7306.12	45.38	74.00	-28.62	40.80	4.06	35.92	35.40	Peak	100	86	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.70	49.72	74.00	-24.28	48.26	3.33	33.16	35.03	Peak	100	258	VERTICAL
2	4874.10	37.74	54.00	-16.26	36.28	3.33	33.16	35.03	Average	100	258	VERTICAL
3	7304.56	44.57	74.00	-29.43	39.99	4.06	35.92	35.40	Peak	100	173	VERTICAL
4	7306.08	32.42	54.00	-21.58	27.84	4.06	35.92	35.40	Average	100	173	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch11 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.16	44.47	74.00	-29.53	42.87	3.35	33.26	35.01	Peak	100	48	HORIZONTAL
2	4924.00	31.77	54.00	-22.23	30.17	3.35	33.26	35.01	Average	100	48	HORIZONTAL
3	7380.40	32.03	54.00	-21.97	27.28	4.06	36.09	35.40	Average	100	275	HORIZONTAL
4	7380.68	44.54	74.00	-29.46	39.79	4.06	36.09	35.40	Peak	100	275	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.56	37.62	54.00	-16.38	36.02	3.35	33.26	35.01	Average	100	98	VERTICAL
2	4923.56	51.50	74.00	-22.50	49.90	3.35	33.26	35.01	Peak	100	98	VERTICAL
3	7382.28	32.18	54.00	-21.82	27.43	4.06	36.09	35.40	Average	100	178	VERTICAL
4	7388.24	45.06	74.00	-28.94	40.31	4.06	36.09	35.40	Peak	100	178	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 20MHz Ch 1 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.40	42.43	74.00	-31.57	41.09	3.31	33.06	35.03	Peak	100	252	HORIZONTAL
2	4823.84	32.31	54.00	-21.69	30.97	3.31	33.06	35.03	Average	100	252	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4820.12	43.45	74.00	-30.55	42.11	3.31	33.06	35.03	Peak	100	146	VERTICAL
2	4823.88	33.57	54.00	-20.43	32.23	3.31	33.06	35.03	Average	100	146	VERTICAL





<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 20MHz Ch 6 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4868.88	45.92	74.00	-28.08	44.50	3.33	33.12	35.03	Peak	100	251	HORIZONTAL
2	4872.64	34.02	54.00	-19.98	32.56	3.33	33.16	35.03	Average	100	251	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4874.40	35.47	54.00	-18.53	34.01	3.33	33.16	35.03	Average	100	181	VERTICAL
2	4882.64	43.34	74.00	-30.66	41.88	3.33	33.16	35.03	Peak	100	181	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 20MHz Ch11 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4924.56	39.36	54.00	-14.64	37.76	3.35	33.26	35.01	Average	100	235 HORIZONTAL
2	4930.24	50.77	74.00	-23.23	49.17	3.35	33.26	35.01	Peak	100	235 HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4924.04	53.18	74.00	-20.82	51.58	3.35	33.26	35.01	Peak	100	269 VERTICAL
2	4924.52	42.31	54.00	-11.69	40.71	3.35	33.26	35.01	Average	100	269 VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4843.92	30.85	54.00	-23.15	29.47	3.32	33.09	35.03	Average	100	110	HORIZONTAL
2	4852.08	42.85	74.00	-31.15	41.47	3.32	33.09	35.03	Peak	100	110	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4841.36	43.46	74.00	-30.54	42.08	3.32	33.09	35.03	Peak	113	288	VERTICAL
2	4843.84	32.04	54.00	-21.96	30.66	3.32	33.09	35.03	Average	113	288	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 6 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.00	31.09	54.00	-22.91	29.63	3.33	33.16	35.03	100	120	HORIZONTAL
2	4876.60	42.43	74.00	-31.57	40.97	3.33	33.16	35.03	100	120	HORIZONTAL
3	7303.64	44.26	74.00	-29.74	39.68	4.06	35.92	35.40	100	148	HORIZONTAL
4	7307.08	32.07	54.00	-21.93	27.49	4.06	35.92	35.40	100	148	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.84	33.70	54.00	-20.30	32.24	3.33	33.16	35.03	100	286	VERTICAL
2	4874.32	46.40	74.00	-27.60	44.94	3.33	33.16	35.03	100	286	VERTICAL
3	7301.32	32.18	54.00	-21.82	27.60	4.06	35.92	35.40	100	148	VERTICAL
4	7309.04	44.15	74.00	-29.85	39.53	4.06	35.96	35.40	100	148	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 9 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4918.96	30.58	54.00	-23.42	29.02	3.35	33.23	35.02	Average	100	148	HORIZONTAL
2	4923.00	43.78	74.00	-30.22	42.18	3.35	33.26	35.01	Peak	100	148	HORIZONTAL
3	7377.48	32.30	54.00	-21.70	27.55	4.06	36.09	35.40	Average	100	276	HORIZONTAL
4	7391.60	44.61	74.00	-29.39	39.86	4.06	36.09	35.40	Peak	100	276	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4915.84	31.18	54.00	-22.82	29.62	3.35	33.23	35.02	Average	100	206	VERTICAL
2	4920.32	43.31	74.00	-30.69	41.74	3.35	33.23	35.01	Peak	100	206	VERTICAL
3	7391.56	44.42	74.00	-29.58	39.67	4.06	36.09	35.40	Peak	100	294	VERTICAL
4	7394.44	32.24	54.00	-21.76	27.45	4.06	36.13	35.40	Average	100	294	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4843.93	33.04	54.00	-20.96	30.92	4.21	34.68	32.59	Average	202	100	HORIZONTAL
2 p	4844.16	44.75	74.00	-29.25	42.63	4.21	34.68	32.59	Peak	202	100	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4843.88	36.35	54.00	-17.65	34.23	4.21	34.68	32.59	Average	150	100	VERTICAL
2 p	4844.46	46.88	74.00	-27.12	44.76	4.21	34.68	32.59	Peak	150	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 6 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.06	49.86	74.00	-24.14	48.40	3.33	33.16	35.03	Peak	133	298	HORIZONTAL
2	4874.00	37.82	54.00	-16.18	36.36	3.33	33.16	35.03	Average	133	298	HORIZONTAL
3	7303.12	32.10	54.00	-21.90	27.52	4.06	35.92	35.40	Average	100	133	HORIZONTAL
4	7305.80	44.28	74.00	-29.72	39.70	4.06	35.92	35.40	Peak	100	133	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.90	35.30	54.00	-18.70	33.84	3.33	33.16	35.03	Average	100	288	VERTICAL
2	4874.08	46.80	74.00	-27.20	45.34	3.33	33.16	35.03	Peak	100	288	VERTICAL
3	7302.56	32.28	54.00	-21.72	27.70	4.06	35.92	35.40	Average	100	175	VERTICAL
4	7311.04	45.20	74.00	-28.80	40.58	4.06	35.96	35.40	Peak	100	175	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 9 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4914.76	31.03	54.00	-22.97	29.47	3.35	33.23	35.02	Average	100	258	HORIZONTAL
2	4919.20	43.00	74.00	-31.00	41.44	3.35	33.23	35.02	Peak	100	258	HORIZONTAL
3	7378.88	31.96	54.00	-22.04	27.21	4.06	36.09	35.40	Average	100	48	HORIZONTAL
4	7391.32	45.27	74.00	-28.73	40.52	4.06	36.09	35.40	Peak	100	48	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4920.44	30.91	54.00	-23.09	29.34	3.35	33.23	35.01	Average	100	94	VERTICAL
2	4925.14	43.78	74.00	-30.22	42.18	3.35	33.26	35.01	Peak	100	94	VERTICAL
3	7378.96	44.43	74.00	-29.57	39.68	4.06	36.09	35.40	Peak	100	150	VERTICAL
4	7381.44	32.13	54.00	-21.87	27.38	4.06	36.09	35.40	Average	100	150	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 40MHz Ch 3 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4843.88	32.99	54.00	-21.01	30.87	4.21	34.68	32.59	Average	257	100	HORIZONTAL
2 p	4844.05	44.39	74.00	-29.61	42.27	4.21	34.68	32.59	Peak	257	100	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4843.89	35.75	54.00	-18.25	33.63	4.21	34.68	32.59	Average	133	100	VERTICAL
2 p	4844.06	44.22	74.00	-29.78	42.10	4.21	34.68	32.59	Peak	133	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 40MHz Ch 6 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4874.00	31.61	54.00	-22.39	30.15	3.33	33.16	35.03	Average	100	127	HORIZONTAL
2	4879.68	43.41	74.00	-30.59	41.95	3.33	33.16	35.03	Peak	100	127	HORIZONTAL
3	7297.08	32.01	54.00	-21.99	27.43	4.06	35.92	35.40	Average	100	296	HORIZONTAL
4	7297.72	43.99	74.00	-30.01	39.41	4.06	35.92	35.40	Peak	100	296	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4874.00	33.34	54.00	-20.66	31.88	3.33	33.16	35.03	Average	100	289	VERTICAL
2	4893.76	43.51	74.00	-30.49	42.01	3.34	33.19	35.03	Peak	100	289	VERTICAL
3	7291.16	32.76	54.00	-21.24	28.18	4.06	35.92	35.40	Average	100	153	VERTICAL
4	7308.28	45.22	74.00	-28.78	40.60	4.06	35.96	35.40	Peak	100	153	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 40MHz Ch 9 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4903.76	43.60	74.00	-30.40	42.09	3.34	33.19	35.02	Peak	100	221	HORIZONTAL
2	4903.99	31.36	54.00	-22.64	29.85	3.34	33.19	35.02	Average	100	221	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4903.89	32.50	54.00	-21.50	30.99	3.34	33.19	35.02	Average	102	9	VERTICAL
2	4903.90	44.27	74.00	-29.73	42.76	3.34	33.19	35.02	Peak	102	9	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11b CH 1 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.96	48.03	54.00	-5.97	46.69	3.31	33.06	35.03	Average	104	244	HORIZONTAL
2	4824.04	51.39	74.00	-22.61	50.05	3.31	33.06	35.03	Peak	104	244	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.94	46.28	54.00	-7.72	44.94	3.31	33.06	35.03	Average	100	273	VERTICAL
2	4824.06	50.34	74.00	-23.66	49.00	3.31	33.06	35.03	Peak	100	273	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11b CH 6 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.94	49.47	74.00	-24.53	48.01	3.33	33.16	35.03	Peak	105	244	HORIZONTAL
2	4873.96	45.54	54.00	-8.46	44.08	3.33	33.16	35.03	Average	105	244	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.80	50.40	74.00	-23.60	48.94	3.33	33.16	35.03	Peak	104	178	VERTICAL
2	4873.94	47.04	54.00	-6.96	45.58	3.33	33.16	35.03	Average	104	178	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11b CH 11 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.88	49.48	74.00	-24.52	47.88	3.35	33.26	35.01	Peak	100	243	HORIZONTAL
2	4923.93	45.90	54.00	-8.10	44.30	3.35	33.26	35.01	Average	100	243	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.96	47.65	54.00	-6.35	46.05	3.35	33.26	35.01	Average	102	7	VERTICAL
2	4923.96	50.77	74.00	-23.23	49.17	3.35	33.26	35.01	Peak	102	7	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 1 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4820.32	43.33	74.00	-30.67	41.99	3.31	33.06	35.03	Peak	100	293	HORIZONTAL
2	4824.20	33.11	54.00	-20.89	31.77	3.31	33.06	35.03	Average	100	293	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4824.04	33.60	54.00	-20.40	32.26	3.31	33.06	35.03	Average	100	105	VERTICAL
2	4825.12	46.56	74.00	-27.44	45.22	3.31	33.06	35.03	Peak	100	105	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 6 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4874.08	41.40	54.00	-12.60	39.94	3.33	33.16	35.03	Average	100	152	HORIZONTAL
2	4874.72	54.46	74.00	-19.54	53.00	3.33	33.16	35.03	Peak	100	152	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4872.28	39.56	54.00	-14.44	38.10	3.33	33.16	35.03	Average	100	356	VERTICAL
2	4874.56	52.54	74.00	-21.46	51.08	3.33	33.16	35.03	Peak	100	356	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 11 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4921.48	44.65	74.00	-29.35	43.08	3.35	33.23	35.01	Peak	100	247	HORIZONTAL
2	4923.80	32.45	54.00	-21.55	30.85	3.35	33.26	35.01	Average	100	247	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4915.04	44.09	74.00	-29.91	42.53	3.35	33.23	35.02	Peak	100	127	VERTICAL
2	4924.16	33.60	54.00	-20.40	32.00	3.35	33.26	35.01	Average	100	127	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 1 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4823.92	43.42	74.00	-30.58	42.08	3.31	33.06	35.03	Peak	100	290 HORIZONTAL
2	4824.04	34.59	54.00	-19.41	33.25	3.31	33.06	35.03	Average	100	290 HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4823.96	36.07	54.00	-17.93	34.73	3.31	33.06	35.03	Average	107	84 VERTICAL
2	4824.92	47.05	74.00	-26.95	45.71	3.31	33.06	35.03	Peak	107	84 VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 6 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4870.50	49.47	74.00	-24.53	48.05	3.33	33.12	35.03	Peak	100	138	HORIZONTAL
2	4872.20	38.79	54.00	-15.21	37.33	3.33	33.16	35.03	Average	100	138	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.92	48.32	74.00	-25.68	46.86	3.33	33.16	35.03	Peak	100	245	VERTICAL
2	4874.00	37.81	54.00	-16.19	36.35	3.33	33.16	35.03	Average	100	245	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 11 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4924.08	43.16	54.00	-10.84	41.56	3.35	33.26	35.01	Average	100	127	HORIZONTAL
2	4924.60	55.23	74.00	-18.77	53.63	3.35	33.26	35.01	Peak	100	127	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4924.16	43.11	54.00	-10.89	41.51	3.35	33.26	35.01	Average	100	35	VERTICAL
2	4924.60	55.44	74.00	-18.56	53.84	3.35	33.26	35.01	Peak	100	35	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 1 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4835.90	43.67	74.00	-30.33	41.56	4.21	34.69	32.59	Peak	167	100	HORIZONTAL
2 a	4836.70	31.08	54.00	-22.92	28.97	4.21	34.69	32.59	Average	167	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4823.90	49.11	74.00	-24.89	47.03	4.21	34.69	32.56	Peak	222	100	VERTICAL
2 a	4823.90	36.77	54.00	-17.23	34.69	4.21	34.69	32.56	Average	222	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 6 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4872.30	31.24	54.00	-22.76	29.03	4.22	34.67	32.66	Average	163	100	HORIZONTAL
2 p	4875.00	43.62	74.00	-30.38	41.41	4.22	34.67	32.66	Peak	163	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4867.30	53.60	74.00	-20.40	51.44	4.21	34.67	32.62	Peak	229	100	VERTICAL
2 a	4873.90	41.73	54.00	-12.27	39.52	4.22	34.67	32.66	Average	229	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch11 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4924.50	31.69	54.00	-22.31	29.35	4.23	34.65	32.76	Average	89	100	HORIZONTAL
2 p	4934.40	44.50	74.00	-29.50	42.16	4.23	34.65	32.76	Peak	89	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4923.80	45.68	74.00	-28.32	43.34	4.23	34.65	32.76	Peak	227	100	VERTICAL
2 a	4923.80	33.84	54.00	-20.16	31.50	4.23	34.65	32.76	Average	227	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 1 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4823.12	43.70	74.00	-30.30	41.62	4.21	34.69	32.56	Peak	235	100	HORIZONTAL
2 a	4826.32	30.62	54.00	-23.38	28.54	4.21	34.69	32.56	Average	235	100	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4823.83	37.88	54.00	-16.12	35.80	4.21	34.69	32.56	Average	146	100	VERTICAL
2 p	4824.02	49.07	74.00	-24.93	46.99	4.21	34.69	32.56	Peak	146	100	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 6 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4873.96	31.11	54.00	-22.89	28.90	4.22	34.67	32.66	Average	200	100	HORIZONTAL
2 p	4876.16	43.46	74.00	-30.54	41.25	4.22	34.67	32.66	Peak	200	100	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4871.97	52.45	74.00	-21.55	50.24	4.22	34.67	32.66	Peak	206	100	VERTICAL
2 a	4873.82	38.50	54.00	-15.50	36.29	4.22	34.67	32.66	Average	206	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch11 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4925.02	31.67	54.00	-22.33	29.33	4.23	34.65	32.76	Average	90	100	HORIZONTAL
2 p	4925.91	44.50	74.00	-29.50	42.16	4.23	34.65	32.76	Peak	90	100	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4923.96	35.95	54.00	-18.05	33.61	4.23	34.65	32.76	Average	216	100	VERTICAL
2 p	4924.01	47.09	74.00	-26.91	44.75	4.23	34.65	32.76	Peak	216	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 20MHz Ch 1 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4822.98	30.74	54.00	-23.26	28.66	4.21	34.69	32.56	Average	171	100	HORIZONTAL
2 p	4823.00	43.99	74.00	-30.01	41.91	4.21	34.69	32.56	Peak	171	100	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4823.90	37.52	54.00	-16.48	35.44	4.21	34.69	32.56	Average	104	100	VERTICAL
2 p	4824.09	47.42	74.00	-26.58	45.34	4.21	34.69	32.56	Peak	104	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 20MHz Ch 6 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4869.80	44.29	74.00	-29.71	42.08	4.22	34.67	32.66	Peak	146	100	HORIZONTAL
2	4879.08	31.14	54.00	-22.86	28.93	4.22	34.67	32.66	Average	146	100	HORIZONTAL
3 a	7306.84	35.16	54.00	-18.84	27.78	5.34	34.93	36.97	Average	192	100	HORIZONTAL
4 p	7308.64	47.58	74.00	-26.42	40.20	5.34	34.93	36.97	Peak	192	100	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4873.92	38.33	54.00	-15.67	36.12	4.22	34.67	32.66	Average	224	100	VERTICAL
2 p	4874.08	50.40	74.00	-23.60	48.19	4.22	34.67	32.66	Peak	224	100	VERTICAL
3	7305.64	47.38	74.00	-26.62	40.00	5.34	34.93	36.97	Peak	279	100	VERTICAL
4	7315.24	35.05	54.00	-18.95	27.68	5.34	34.94	36.97	Average	279	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 20MHz Ch11 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4923.91	31.81	54.00	-22.19	29.47	4.23	34.65	32.76	Average	121	100	HORIZONTAL
2	4924.17	44.71	74.00	-29.29	42.37	4.23	34.65	32.76	Peak	121	100	HORIZONTAL
3 a	7382.80	35.77	54.00	-18.23	28.31	5.36	34.96	37.06	Average	185	100	HORIZONTAL
4 p	7390.00	48.76	74.00	-25.24	41.28	5.36	34.96	37.08	Peak	185	100	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4923.98	47.20	74.00	-26.80	44.86	4.23	34.65	32.76	Peak	274	100	VERTICAL
2 a	4923.98	36.15	54.00	-17.85	33.81	4.23	34.65	32.76	Average	274	100	VERTICAL
3	7382.48	35.72	54.00	-18.28	28.26	5.36	34.96	37.06	Average	231	100	VERTICAL
4 p	7388.20	48.99	74.00	-25.01	41.51	5.36	34.96	37.08	Peak	231	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4839.70	31.01	54.00	-22.99	28.89	4.21	34.68	32.59	Average	61	100	HORIZONTAL
2 p	4853.40	43.89	74.00	-30.11	41.74	4.21	34.68	32.62	Peak	61	100	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4843.90	45.23	74.00	-28.77	43.11	4.21	34.68	32.59	Peak	229	100	VERTICAL
2 a	4843.90	35.75	54.00	-18.25	33.63	4.21	34.68	32.59	Average	229	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 6 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4859.90	43.62	74.00	-30.38	41.47	4.21	34.68	32.62	Peak	258	100	HORIZONTAL
2 a	4862.80	31.24	54.00	-22.76	29.09	4.21	34.68	32.62	Average	258	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4865.10	45.77	74.00	-28.23	43.61	4.21	34.67	32.62	Peak	142	100	VERTICAL
2 a	4874.00	36.13	54.00	-17.87	33.92	4.22	34.67	32.66	Average	142	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 9 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4912.40	44.52	74.00	-29.48	42.23	4.22	34.66	32.73	Peak	168	100	HORIZONTAL
2 a	4926.90	31.73	54.00	-22.27	29.39	4.23	34.65	32.76	Average	168	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4903.90	33.37	54.00	-20.63	31.08	4.22	34.66	32.73	Average	283	100	VERTICAL
2 p	4907.50	44.76	74.00	-29.24	42.47	4.22	34.66	32.73	Peak	283	100	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4843.59	43.53	74.00	-30.47	41.41	4.21	34.68	32.59	Peak	128	100	HORIZONTAL
2 a	4844.32	30.83	54.00	-23.17	28.71	4.21	34.68	32.59	Average	128	100	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4843.68	47.17	74.00	-26.83	45.05	4.21	34.68	32.59	Peak	212	100	VERTICAL
2 a	4843.91	38.18	54.00	-15.82	36.06	4.21	34.68	32.59	Average	212	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 6 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.72	42.53	74.00	-31.47	41.07	3.33	33.16	35.03	Peak	100	193	HORIZONTAL
2	4873.89	29.67	54.00	-24.33	28.21	3.33	33.16	35.03	Average	100	193	HORIZONTAL
3	7310.48	46.64	74.00	-27.36	42.02	4.06	35.96	35.40	Peak	100	249	HORIZONTAL
4	7311.29	32.91	54.00	-21.09	28.29	4.06	35.96	35.40	Average	100	249	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.73	46.14	74.00	-27.86	44.68	3.33	33.16	35.03	Peak	100	146	VERTICAL
2	4873.97	36.24	54.00	-17.76	34.78	3.33	33.16	35.03	Average	100	146	VERTICAL
3	7310.78	46.32	74.00	-27.68	41.70	4.06	35.96	35.40	Peak	100	264	VERTICAL
4	7311.37	33.02	54.00	-20.98	28.40	4.06	35.96	35.40	Average	100	264	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 9 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4906.26	29.90	54.00	-24.10	28.35	3.34	33.23	35.02	Average	100	186	HORIZONTAL
2	4906.29	42.54	74.00	-31.46	40.99	3.34	33.23	35.02	Peak	100	186	HORIZONTAL
3	7354.45	33.58	54.00	-20.42	28.90	4.06	36.02	35.40	Average	100	104	HORIZONTAL
4	7357.99	46.75	74.00	-27.25	42.07	4.06	36.02	35.40	Peak	100	104	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4903.92	35.81	54.00	-18.19	34.30	3.34	33.19	35.02	Average	100	144	VERTICAL
2	4904.03	45.26	74.00	-28.74	43.75	3.34	33.19	35.02	Peak	100	144	VERTICAL
3	7357.32	46.53	74.00	-27.47	41.85	4.06	36.02	35.40	Peak	100	255	VERTICAL
4	7358.50	33.54	54.00	-20.46	28.86	4.06	36.02	35.40	Average	100	255	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 40MHz Ch 3 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4843.53	30.81	54.00	-23.19	28.69	4.21	34.68	32.59	Average	219	100	HORIZONTAL
2 p	4844.49	43.83	74.00	-30.17	41.71	4.21	34.68	32.59	Peak	219	100	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4843.88	38.69	54.00	-15.31	36.57	4.21	34.68	32.59	Average	134	113	VERTICAL
2 p	4844.25	47.66	74.00	-26.34	45.54	4.21	34.68	32.59	Peak	134	113	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 40MHz Ch 6 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4875.78	42.53	74.00	-31.47	41.07	3.33	33.16	35.03	Peak	100	260	HORIZONTAL
2	4876.25	29.60	54.00	-24.40	28.14	3.33	33.16	35.03	Average	100	260	HORIZONTAL
3	7309.49	33.06	54.00	-20.94	28.44	4.06	35.96	35.40	Average	100	189	HORIZONTAL
4	7312.25	46.91	74.00	-27.09	42.29	4.06	35.96	35.40	Peak	100	189	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.89	46.04	74.00	-27.96	44.58	3.33	33.16	35.03	Peak	100	141	VERTICAL
2	4873.93	35.95	54.00	-18.05	34.49	3.33	33.16	35.03	Average	100	141	VERTICAL
3	7309.84	33.16	54.00	-20.84	28.54	4.06	35.96	35.40	Average	100	231	VERTICAL
4	7309.89	46.05	74.00	-27.95	41.43	4.06	35.96	35.40	Peak	100	231	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 40MHz Ch 9 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4903.89	29.92	54.00	-24.08	28.41	3.34	33.19	35.02	Average	100	179	HORIZONTAL
2	4906.07	43.88	74.00	-30.12	42.33	3.34	33.23	35.02	Peak	100	179	HORIZONTAL
3	7354.22	47.15	74.00	-26.85	42.47	4.06	36.02	35.40	Peak	100	267	HORIZONTAL
4	7357.35	33.45	54.00	-20.55	28.77	4.06	36.02	35.40	Average	100	267	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4903.72	44.61	74.00	-29.39	43.10	3.34	33.19	35.02	Peak	100	137	VERTICAL
2	4903.95	35.26	54.00	-18.74	33.75	3.34	33.19	35.02	Average	100	137	VERTICAL
3	7353.96	46.64	74.00	-27.36	41.96	4.06	36.02	35.40	Peak	100	184	VERTICAL
4	7356.79	33.50	54.00	-20.50	28.82	4.06	36.02	35.40	Average	100	184	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11b CH 1 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4823.94	44.79	54.00	-9.21	42.71	4.21	34.69	32.56	Average	148	181	HORIZONTAL
2 p	4823.98	50.05	74.00	-23.95	47.97	4.21	34.69	32.56	Peak	148	181	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4823.92	52.90	74.00	-21.10	50.82	4.21	34.69	32.56	Peak	136	102	VERTICAL
2 a	4823.93	49.96	54.00	-4.04	47.88	4.21	34.69	32.56	Average	136	102	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11b CH 6 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4873.90	49.33	74.00	-24.67	47.12	4.22	34.67	32.66	Peak	153	137	HORIZONTAL
2 a	4873.96	43.75	54.00	-10.25	41.54	4.22	34.67	32.66	Average	153	137	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4873.79	53.87	74.00	-20.13	51.66	4.22	34.67	32.66	Peak	96	105	VERTICAL
2 a	4873.93	51.09	54.00	-2.91	48.88	4.22	34.67	32.66	Average	96	105	VERTICAL



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11b CH 11 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4923.91	41.73	54.00	-12.27	39.39	4.23	34.65	32.76	Average	150	134	HORIZONTAL
2 p	4924.00	48.11	74.00	-25.89	45.77	4.23	34.65	32.76	Peak	150	134	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4923.92	48.70	74.00	-25.30	46.36	4.23	34.65	32.76	Peak	227	100	VERTICAL
2 a	4923.93	42.25	54.00	-11.75	39.91	4.23	34.65	32.76	Average	227	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 1 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4822.66	43.95	74.00	-30.05	41.87	4.21	34.69	32.56	Peak	242	100	HORIZONTAL
2 a	4826.74	31.98	54.00	-22.02	29.90	4.21	34.69	32.56	Average	242	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4823.98	37.55	54.00	-16.45	35.47	4.21	34.69	32.56	Average	101	100	VERTICAL
2 p	4824.52	50.44	74.00	-23.56	48.36	4.21	34.69	32.56	Peak	101	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 6 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4873.90	31.84	54.00	-22.16	29.63	4.22	34.67	32.66	Average	303	100	HORIZONTAL
2 p	4889.50	43.68	74.00	-30.32	41.43	4.22	34.66	32.69	Peak	303	100	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4870.20	54.63	74.00	-19.37	52.42	4.22	34.67	32.66	Peak	135	100	VERTICAL
2 a	4872.20	42.05	54.00	-11.95	39.84	4.22	34.67	32.66	Average	135	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 11 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4927.80	31.60	54.00	-22.40	29.26	4.23	34.65	32.76	Average	231	100	HORIZONTAL
2 p	4928.20	44.34	74.00	-29.66	42.00	4.23	34.65	32.76	Peak	231	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4920.80	45.19	74.00	-28.81	42.85	4.23	34.65	32.76	Peak	134	100	VERTICAL
2 a	4924.00	33.66	54.00	-20.34	31.32	4.23	34.65	32.76	Average	134	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 1 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4837.50	44.02	74.00	-29.98	41.91	4.21	34.69	32.59	Peak	178	100	HORIZONTAL
2 a	4838.00	31.02	54.00	-22.98	28.90	4.21	34.68	32.59	Average	178	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4823.90	38.98	54.00	-15.02	36.90	4.21	34.69	32.56	Average	215	100	VERTICAL
2 p	4824.60	50.25	74.00	-23.75	48.17	4.21	34.69	32.56	Peak	215	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 6 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4872.98	30.96	54.00	-23.04	28.75	4.22	34.67	32.66	Average	181	100	HORIZONTAL
2 p	4875.89	44.15	74.00	-29.85	41.94	4.22	34.67	32.66	Peak	181	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4867.60	38.52	54.00	-15.48	36.31	4.22	34.67	32.66	Average	219	100	VERTICAL
2 p	4870.30	52.39	74.00	-21.61	50.18	4.22	34.67	32.66	Peak	219	100	VERTICAL

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 11 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	4922.51	31.46	54.00	-22.54	29.12	4.23	34.65	32.76	Average	204	100	HORIZONTAL
2 p	4926.20	44.49	74.00	-29.51	42.15	4.23	34.65	32.76	Peak	204	100	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4923.49	48.03	74.00	-25.97	45.69	4.23	34.65	32.76	Peak	143	100	VERTICAL
2 a	4923.98	36.32	54.00	-17.68	33.98	4.23	34.65	32.76	Average	143	100	VERTICAL

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Emissions Measurement

### 4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

### 4.6.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Conducted Out of Band Emission Measurement:

- Test was performed in accordance with KDB 558074 v02 Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
- The conducted emission test is performed on each TX port of operating mode without summing or adding  $10\log(N)$  since the limit is relative emission limit.  
Only worst data of each operating mode is presented.



#### **4.6.4. Test Setup Layout**

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Conducted Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.4.4.

#### **4.6.5. Test Deviation**

There is no deviation with the original standard.

#### **4.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

##### Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.80	65.19	74.00	-8.81	34.80	2.22	28.17	0.00	Peak	182	267	HORIZONTAL
2	2390.00	50.13	54.00	-3.87	19.74	2.22	28.17	0.00	Average	182	267	HORIZONTAL
3	2418.40	108.87			78.39	2.23	28.25	0.00	Peak	182	267	HORIZONTAL
4	2420.00	99.17			68.69	2.23	28.25	0.00	Average	182	267	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

##### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.20	68.12	74.00	-5.88	37.74	2.21	28.17	0.00	Peak	168	78	HORIZONTAL
2	2390.00	51.99	54.00	-2.01	21.60	2.22	28.17	0.00	Average	168	78	HORIZONTAL
3	2429.00	106.51			76.03	2.23	28.25	0.00	Average	168	78	HORIZONTAL
4	2429.40	116.50			86.02	2.23	28.25	0.00	Peak	168	78	HORIZONTAL
5	2483.50	52.81	54.00	-1.19	22.17	2.26	28.38	0.00	Average	168	78	HORIZONTAL
6	2483.90	70.50	74.00	-3.50	39.86	2.26	28.38	0.00	Peak	168	78	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

##### Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2454.00	99.60			69.03	2.24	28.33	0.00	Average	136	57	HORIZONTAL
2	2455.00	109.41			78.84	2.24	28.33	0.00	Peak	136	57	HORIZONTAL
3	2483.50	52.76	54.00	-1.24	22.12	2.26	28.38	0.00	Average	136	57	HORIZONTAL
4	2486.10	66.63	74.00	-7.37	35.95	2.26	28.42	0.00	Peak	136	57	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

**Channel 1**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.80	67.30	74.00	-6.70	36.91	2.22	28.17	0.00	Peak	148	78	HORIZONTAL
2	2390.00	53.68	54.00	-0.32	23.29	2.22	28.17	0.00	Average	148	78	HORIZONTAL
3	2409.00	112.51			82.08	2.22	28.21	0.00	Peak	148	78	HORIZONTAL
4	2417.20	102.42			71.94	2.23	28.25	0.00	Average	148	78	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.60	71.14	74.00	-2.86	40.76	2.21	28.17	0.00	Peak	142	267	HORIZONTAL
2	2390.00	50.14	54.00	-3.86	19.75	2.22	28.17	0.00	Average	142	267	HORIZONTAL
3	2430.20	120.62			90.14	2.23	28.25	0.00	Peak	142	267	HORIZONTAL
4	2431.40	110.80			80.32	2.23	28.25	0.00	Average	142	267	HORIZONTAL
5	2483.50	53.02	54.00	-0.98	22.38	2.26	28.38	0.00	Average	142	267	HORIZONTAL
6	2483.90	72.99	74.00	-1.01	42.35	2.26	28.38	0.00	Peak	142	267	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 11**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2468.40	111.75			81.11	2.26	28.38	0.00	Peak	160	77	HORIZONTAL
2	2469.00	101.94			71.30	2.26	28.38	0.00	Average	160	77	HORIZONTAL
3	2483.50	53.63	54.00	-0.37	22.99	2.26	28.38	0.00	Average	160	77	HORIZONTAL
4	2483.70	66.42	74.00	-7.58	35.78	2.26	28.38	0.00	Peak	160	77	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 20MHz Ch 1, 6, 11 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

**Channel 1**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.52	67.03	74.00	-6.97	36.65	2.21	28.17	0.00	Peak	117	2	HORIZONTAL
2	2390.00	53.50	54.00	-0.50	23.11	2.22	28.17	0.00	Average	117	2	HORIZONTAL
3	2406.23	112.62			82.19	2.22	28.21	0.00	Peak	117	2	HORIZONTAL
4	2410.40	101.39			70.96	2.22	28.21	0.00	Average	117	2	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.04	58.77	74.00	-15.23	28.39	2.21	28.17	0.00	Peak	144	354	HORIZONTAL
2	2390.00	47.39	54.00	-6.61	17.00	2.22	28.17	0.00	Average	144	354	HORIZONTAL
3	2430.11	106.65			76.17	2.23	28.25	0.00	Average	144	354	HORIZONTAL
4	2435.72	117.45			86.93	2.23	28.29	0.00	Peak	144	354	HORIZONTAL
5	2483.50	48.16	54.00	-5.84	17.52	2.26	28.38	0.00	Average	144	354	HORIZONTAL
6	2483.82	59.73	74.00	-14.27	29.09	2.26	28.38	0.00	Peak	144	354	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 11**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2466.01	112.86			82.29	2.24	28.33	0.00	Peak	142	358	HORIZONTAL
2	2468.89	102.26			71.62	2.26	28.38	0.00	Average	142	358	HORIZONTAL
3	2483.50	53.22	54.00	-0.78	22.58	2.26	28.38	0.00	Average	142	358	HORIZONTAL
4	2484.14	66.01	74.00	-7.99	35.37	2.26	28.38	0.00	Peak	142	358	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Chain 1 / ITX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.36	64.68	74.00	-9.32	34.30	2.21	28.17	0.00	Peak	145	355	HORIZONTAL
2	2390.00	53.33	54.00	-0.67	22.94	2.22	28.17	0.00	Average	145	355	HORIZONTAL
3	2427.45	96.82			66.34	2.23	28.25	0.00	Average	145	355	HORIZONTAL
4	2428.73	106.61			76.13	2.23	28.25	0.00	Peak	145	355	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2386.80	66.21	74.00	-7.79	35.83	2.21	28.17	0.00	Peak	144	351	HORIZONTAL
2	2390.00	53.32	54.00	-0.68	22.93	2.22	28.17	0.00	Average	144	351	HORIZONTAL
3	2429.31	109.86			79.38	2.23	28.25	0.00	Peak	144	351	HORIZONTAL
4	2438.60	99.91			69.39	2.23	28.29	0.00	Average	144	351	HORIZONTAL
5	2483.50	52.90	54.00	-1.10	22.26	2.26	28.38	0.00	Average	144	351	HORIZONTAL
6	2490.23	65.32	74.00	-8.68	34.64	2.26	28.42	0.00	Peak	144	351	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

### Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2449.76	106.06			75.53	2.24	28.29	0.00	Peak	174	351	HORIZONTAL
2	2450.08	96.53			66.00	2.24	28.29	0.00	Average	174	351	HORIZONTAL
3	2484.46	53.37	54.00	-0.63	22.73	2.26	28.38	0.00	Average	174	351	HORIZONTAL
4	2484.78	65.28	74.00	-8.72	34.64	2.26	28.38	0.00	Peak	174	351	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

**Channel 3**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	2389.20	66.81	74.00	-7.19	36.03	2.91	0.00	27.87	Peak	249	150	HORIZONTAL
2	2390.00	53.64	54.00	-0.36	22.86	2.91	0.00	27.87	Average	249	150	HORIZONTAL
3	2424.80	106.32			75.58	2.93	0.00	27.81	Peak	249	150	HORIZONTAL
4	2426.40	96.54			65.80	2.93	0.00	27.81	Average	249	150	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.68	67.84	74.00	-6.16	37.46	2.21	28.17	0.00	Peak	144	353	HORIZONTAL
2	2390.00	52.79	54.00	-1.21	22.40	2.22	28.17	0.00	Average	144	353	HORIZONTAL
3	2429.31	111.35			80.87	2.23	28.25	0.00	Peak	144	353	HORIZONTAL
4	2435.08	101.42			70.90	2.23	28.29	0.00	Average	144	353	HORIZONTAL
5	2483.50	53.45	54.00	-0.55	22.81	2.26	28.38	0.00	Average	144	353	HORIZONTAL
6	2483.82	67.45	74.00	-6.55	36.81	2.26	28.38	0.00	Peak	144	353	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 9**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2447.83	106.06			75.53	2.24	28.29	0.00	Peak	168	205	HORIZONTAL
2	2450.08	96.33			65.80	2.24	28.29	0.00	Average	168	205	HORIZONTAL
3	2483.50	53.35	54.00	-0.65	22.71	2.26	28.38	0.00	Average	168	205	HORIZONTAL
4	2487.99	65.74	74.00	-8.26	35.06	2.26	28.42	0.00	Peak	168	205	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 40MHz Ch 3, 6, 9 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	2387.60	67.28	74.00	-6.72	36.50	2.91	0.00	27.87	Peak	89	177	HORIZONTAL
2 l	2389.60	53.97	54.00	-0.03	23.19	2.91	0.00	27.87	Average	88	177	HORIZONTAL
3 a	2425.60	97.85			67.11	2.93	0.00	27.81	Average	88	177	HORIZONTAL
4 p	2426.80	108.18			77.44	2.93	0.00	27.81	Peak	89	177	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	53.37	54.00	-0.63	22.98	2.22	28.17	0.00	Average	145	354	HORIZONTAL
2	2390.00	65.59	74.00	-8.41	35.20	2.22	28.17	0.00	Peak	145	354	HORIZONTAL
3	2428.67	100.35			69.87	2.23	28.25	0.00	Average	145	354	HORIZONTAL
4	2433.80	111.27			80.79	2.23	28.25	0.00	Peak	145	354	HORIZONTAL
5	2483.50	52.96	54.00	-1.04	22.32	2.26	28.38	0.00	Average	145	354	HORIZONTAL
6	2483.50	64.49	74.00	-9.51	33.85	2.26	28.38	0.00	Peak	145	354	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

### Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2445.59	107.00			76.47	2.24	28.29	0.00	Peak	173	350	HORIZONTAL
2	2448.47	97.07			66.54	2.24	28.29	0.00	Average	173	350	HORIZONTAL
3	2483.50	53.21	54.00	-0.79	22.57	2.26	28.38	0.00	Average	173	350	HORIZONTAL
4	2485.42	66.04	74.00	-7.96	35.36	2.26	28.42	0.00	Peak	173	350	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11b CH 1, 6, 11 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

**Channel 1**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2385.51	61.52	74.00	-12.48	31.14	2.21	28.17	0.00	Peak	147	354	HORIZONTAL
2	2385.99	52.19	54.00	-1.81	21.81	2.21	28.17	0.00	Average	147	354	HORIZONTAL
3	2412.80	107.86			77.43	2.22	28.21	0.00	Average	147	354	HORIZONTAL
4	2412.96	111.77			81.34	2.22	28.21	0.00	Peak	147	354	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.56	58.42	74.00	-15.58	28.04	2.21	28.17	0.00	Peak	160	203	HORIZONTAL
2	2389.20	46.69	54.00	-7.31	16.31	2.21	28.17	0.00	Average	160	203	HORIZONTAL
3	2436.04	113.54			83.02	2.23	28.29	0.00	Peak	160	203	HORIZONTAL
4	2436.20	109.90			79.38	2.23	28.29	0.00	Average	160	203	HORIZONTAL
5	2485.10	46.21	54.00	-7.79	15.53	2.26	28.42	0.00	Average	160	203	HORIZONTAL
6	2485.26	57.48	74.00	-16.52	26.80	2.26	28.42	0.00	Peak	160	203	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 11**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2462.64	105.89			75.32	2.24	28.33	0.00	Average	142	356	HORIZONTAL
2	2462.96	109.81			79.24	2.24	28.33	0.00	Peak	142	356	HORIZONTAL
3	2487.83	50.02	54.00	-3.98	19.34	2.26	28.42	0.00	Average	142	356	HORIZONTAL
4	2488.15	60.57	74.00	-13.43	29.89	2.26	28.42	0.00	Peak	142	356	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Chain 1 / ITX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

**Channel 1**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.68	63.46	74.00	-10.54	33.08	2.21	28.17	0.00	Peak	183	267	HORIZONTAL
2	2390.00	49.84	54.00	-4.16	19.45	2.22	28.17	0.00	Average	183	267	HORIZONTAL
3	2418.41	108.02			77.54	2.23	28.25	0.00	Peak	183	267	HORIZONTAL
4	2419.53	98.85			68.37	2.23	28.25	0.00	Average	183	267	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.72	65.04	74.00	-8.96	34.66	2.21	28.17	0.00	Peak	170	81	HORIZONTAL
2	2390.00	51.63	54.00	-2.37	21.24	2.22	28.17	0.00	Average	170	81	HORIZONTAL
3	2429.95	107.06			76.58	2.23	28.25	0.00	Average	170	81	HORIZONTAL
4	2430.91	116.99			86.51	2.23	28.25	0.00	Peak	170	81	HORIZONTAL
5	2483.50	50.54	54.00	-3.46	19.90	2.26	28.38	0.00	Average	170	81	HORIZONTAL
6	2484.78	64.69	74.00	-9.31	34.05	2.26	28.38	0.00	Peak	170	81	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2463.44	109.99			79.42	2.24	28.33	0.00	Peak	163	69	HORIZONTAL
2	2464.08	100.27			69.70	2.24	28.33	0.00	Average	163	69	HORIZONTAL
3	2483.50	50.40	54.00	-3.60	19.76	2.26	28.38	0.00	Average	163	69	HORIZONTAL
4	2483.66	64.41	74.00	-9.59	33.77	2.26	28.38	0.00	Peak	163	69	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 1

### Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.68	67.18	74.00	-6.82	36.80	2.21	28.17	0.00	Peak	151	266	HORIZONTAL
2	2390.00	53.39	54.00	-0.61	23.00	2.22	28.17	0.00	Average	151	266	HORIZONTAL
3	2411.20	102.36			71.93	2.22	28.21	0.00	Average	151	266	HORIZONTAL
4	2413.76	111.88			81.45	2.22	28.21	0.00	Peak	151	266	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.68	60.46	74.00	-13.54	30.08	2.21	28.17	0.00	Peak	147	87	HORIZONTAL
2	2390.00	46.96	54.00	-7.04	16.57	2.22	28.17	0.00	Average	147	87	HORIZONTAL
3	2439.24	109.80			79.28	2.23	28.29	0.00	Average	147	87	HORIZONTAL
4	2440.21	119.38			88.86	2.23	28.29	0.00	Peak	147	87	HORIZONTAL
5	2483.50	51.78	54.00	-2.22	21.14	2.26	28.38	0.00	Average	147	87	HORIZONTAL
6	2483.82	66.88	74.00	-7.12	36.24	2.26	28.38	0.00	Peak	147	87	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2457.35	103.24			72.67	2.24	28.33	0.00	Average	161	290	HORIZONTAL
2	2458.64	112.84			82.27	2.24	28.33	0.00	Peak	161	290	HORIZONTAL
3	2483.50	51.03	54.00	-2.97	20.39	2.26	28.38	0.00	Average	161	290	HORIZONTAL
4	2484.30	63.95	74.00	-10.05	33.31	2.26	28.38	0.00	Peak	161	290	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2389.80	67.94	74.00	-6.06	37.16	2.91	0.00	27.87	Peak	77	100	VERTICAL
2	2390.00	51.77	54.00	-2.23	20.99	2.91	0.00	27.87	Average	77	100	VERTICAL
3	2406.20	100.63			69.87	2.92	0.00	27.84	Average	77	100	VERTICAL
4	2409.00	111.17			80.41	2.92	0.00	27.84	Peak	77	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2389.80	69.48	74.00	-4.52	38.70	2.91	0.00	27.87	Peak	77	100	VERTICAL
2	2390.00	53.51	54.00	-0.49	22.73	2.91	0.00	27.87	Average	77	100	VERTICAL
3	2438.80	117.59			86.87	2.94	0.00	27.78	Peak	77	100	VERTICAL
4	2440.00	107.78			77.06	2.94	0.00	27.78	Average	77	100	VERTICAL
5	2483.50	50.58	54.00	-3.42	19.89	2.96	0.00	27.73	Average	77	100	VERTICAL
6	2484.70	70.27	74.00	-3.73	39.58	2.96	0.00	27.73	Peak	77	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2463.80	110.11			79.40	2.95	0.00	27.76	Peak	91	100	VERTICAL
2	2467.20	102.01			71.30	2.95	0.00	27.76	Average	91	100	VERTICAL
3	2483.50	62.65	74.00	-11.35	31.96	2.96	0.00	27.73	Peak	91	100	VERTICAL
4	2483.50	52.19	54.00	-1.81	21.50	2.96	0.00	27.73	Average	91	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2390.00	66.60	74.00	-7.40	35.82	2.91	0.00	27.87	Peak	92	100	VERTICAL
2	2390.00	51.84	54.00	-2.16	21.06	2.91	0.00	27.87	Average	92	100	VERTICAL
3	2409.00	112.06			81.30	2.92	0.00	27.84	Peak	92	100	VERTICAL
4	2410.40	101.60			70.84	2.92	0.00	27.84	Average	92	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2388.80	60.36	74.00	-13.64	29.58	2.91	0.00	27.87	Peak	91	100	VERTICAL
2	2390.00	45.61	54.00	-8.39	14.83	2.91	0.00	27.87	Average	91	100	VERTICAL
3	2439.40	116.31			85.59	2.94	0.00	27.78	Peak	91	100	VERTICAL
4	2440.00	106.51			75.79	2.94	0.00	27.78	Average	91	100	VERTICAL
5	2483.50	45.23	54.00	-8.77	14.54	2.96	0.00	27.73	Average	91	100	VERTICAL
6	2485.50	57.91	74.00	-16.09	27.22	2.96	0.00	27.73	Peak	91	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2455.00	100.15			69.44	2.95	0.00	27.76	Average	90	100	VERTICAL
2	2455.20	109.94			79.23	2.95	0.00	27.76	Peak	90	100	VERTICAL
3	2483.50	47.64	54.00	-6.36	16.95	2.96	0.00	27.73	Average	90	100	VERTICAL
4	2484.30	60.78	74.00	-13.22	30.09	2.96	0.00	27.73	Peak	90	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 20MHz Ch 1, 6, 11 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2389.00	62.92	74.00	-11.08	32.14	2.91	0.00	27.87	Peak	93	100	VERTICAL
2	2390.00	49.76	54.00	-4.24	18.98	2.91	0.00	27.87	Average	93	100	VERTICAL
3	2410.40	99.82			69.06	2.92	0.00	27.84	Average	93	100	VERTICAL
4	2413.40	111.18			80.42	2.92	0.00	27.84	Peak	93	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2389.80	57.12	74.00	-16.88	26.34	2.91	0.00	27.87	Peak	216	100	VERTICAL
2	2390.00	44.47	54.00	-9.53	13.69	2.91	0.00	27.87	Average	216	100	VERTICAL
3	2438.60	104.62			73.90	2.94	0.00	27.78	Average	216	100	VERTICAL
4	2443.80	115.16			84.44	2.94	0.00	27.78	Peak	216	100	VERTICAL
5	2483.50	45.86	54.00	-8.14	15.17	2.96	0.00	27.73	Average	216	100	VERTICAL
6	2484.30	57.73	74.00	-16.27	27.04	2.96	0.00	27.73	Peak	216	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2454.40	100.27			69.56	2.95	0.00	27.76	Average	91	100	VERTICAL
2	2455.20	111.99			81.28	2.95	0.00	27.76	Peak	91	100	VERTICAL
3	2483.50	49.46	54.00	-4.54	18.77	2.96	0.00	27.73	Average	91	100	VERTICAL
4	2484.50	63.03	74.00	-10.97	32.34	2.96	0.00	27.73	Peak	91	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Channel 3**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2386.40	63.26	74.00	-10.74	32.48	2.91	0.00	27.87	Peak	77	100	VERTICAL
2	! 2390.00	50.55	54.00	-3.45	19.77	2.91	0.00	27.87	Average	77	100	VERTICAL
3	a 2423.60	95.99			65.25	2.93	0.00	27.81	Average	77	100	VERTICAL
4	p 2424.80	105.49			74.75	2.93	0.00	27.81	Peak	77	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2390.00	65.04	74.00	-8.96	34.26	2.91	0.00	27.87	Peak	216	100	VERTICAL
2	! 2390.00	50.13	54.00	-3.87	19.35	2.91	0.00	27.87	Average	216	100	VERTICAL
3	a 2441.40	99.89			69.17	2.94	0.00	27.78	Average	216	100	VERTICAL
4	p 2443.80	109.38			78.66	2.94	0.00	27.78	Peak	216	100	VERTICAL
5	! 2483.50	51.29	54.00	-2.71	20.60	2.96	0.00	27.73	Average	216	100	VERTICAL
6	2485.50	66.18	74.00	-7.82	35.49	2.96	0.00	27.73	Peak	216	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 9**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	a 2442.40	96.59			65.87	2.94	0.00	27.78	Average	216	100	VERTICAL
2	p 2444.00	106.56			75.84	2.94	0.00	27.78	Peak	216	100	VERTICAL
3	2483.50	63.45	74.00	-10.55	32.76	2.96	0.00	27.73	Peak	216	100	VERTICAL
4	! 2483.90	49.19	54.00	-4.81	18.50	2.96	0.00	27.73	Average	216	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Channel 3**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2386.00	65.80	74.00	-8.20	35.02	2.91	0.00	27.87	Peak	216	100	VERTICAL
2	2390.00	52.40	54.00	-1.60	21.62	2.91	0.00	27.87	Average	216	100	VERTICAL
3	2414.40	106.67			75.91	2.92	0.00	27.84	Peak	216	100	VERTICAL
4	2416.40	96.46			65.70	2.92	0.00	27.84	Average	216	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2387.60	60.02	74.00	-13.98	29.64	2.21	28.17	0.00	Peak	100	254	VERTICAL
2	2390.00	47.07	54.00	-6.93	16.68	2.22	28.17	0.00	Average	100	254	VERTICAL
3	2423.40	95.99			65.51	2.23	28.25	0.00	Average	100	254	VERTICAL
4	2425.80	105.29			74.81	2.23	28.25	0.00	Peak	100	254	VERTICAL
5	2483.50	46.55	54.00	-7.45	15.92	2.26	28.37	0.00	Average	100	254	VERTICAL
6	2485.10	58.59	74.00	-15.41	27.92	2.26	28.41	0.00	Peak	100	254	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 9**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2447.60	92.61			62.08	2.24	28.29	0.00	Average	103	282	VERTICAL
2	2450.00	102.42			71.89	2.24	28.29	0.00	Peak	103	282	VERTICAL
3	2484.30	47.89	54.00	-6.11	17.26	2.26	28.37	0.00	Average	103	282	VERTICAL
4	2484.70	60.76	74.00	-13.24	30.13	2.26	28.37	0.00	Peak	103	282	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11n MCS8 40MHz Ch 3, 6, 9 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Channel 3**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	2387.60	65.05	74.00	-8.95	34.27	2.91	0.00	27.87	Peak	272	100	VERTICAL
2	2388.40	51.90	54.00	-2.10	21.12	2.91	0.00	27.87	Average	272	100	VERTICAL
3	2426.80	108.73			77.99	2.93	0.00	27.81	Peak	272	100	VERTICAL
4	2426.80	97.23			66.49	2.93	0.00	27.81	Average	272	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	46.55	54.00	-7.45	16.16	2.22	28.17	0.00	Average	100	281	VERTICAL
2	2390.00	59.52	74.00	-14.48	29.13	2.22	28.17	0.00	Peak	100	281	VERTICAL
3	2446.20	95.95			65.42	2.24	28.29	0.00	Average	100	281	VERTICAL
4	2451.00	106.52			75.95	2.24	28.33	0.00	Peak	100	281	VERTICAL
5	2483.50	47.54	54.00	-6.46	16.91	2.26	28.37	0.00	Average	100	281	VERTICAL
6	2483.50	59.83	74.00	-14.17	29.20	2.26	28.37	0.00	Peak	100	281	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 9**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2447.60	104.37			73.84	2.24	28.29	0.00	Peak	100	281	VERTICAL
2	2448.80	93.45			62.92	2.24	28.29	0.00	Average	100	281	VERTICAL
3	2487.50	47.17	54.00	-6.83	16.50	2.26	28.41	0.00	Average	100	281	VERTICAL
4	2491.50	59.77	74.00	-14.23	29.10	2.26	28.41	0.00	Peak	100	281	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.



<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11b CH 1, 6, 11 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2386.20	50.02	54.00	-3.98	19.24	2.91	0.00	27.87	Average	77	100	VERTICAL
2	2387.00	59.42	74.00	-14.58	28.64	2.91	0.00	27.87	Peak	77	100	VERTICAL
3	2411.20	107.06			76.30	2.92	0.00	27.84	Average	77	100	VERTICAL
4	2413.00	110.94			80.18	2.92	0.00	27.84	Peak	77	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2388.00	44.56	54.00	-9.44	13.78	2.91	0.00	27.87	Average	77	100	VERTICAL
2	2389.40	55.92	74.00	-18.08	25.14	2.91	0.00	27.87	Peak	77	100	VERTICAL
3	2437.80	110.24			79.52	2.94	0.00	27.78	Average	77	100	VERTICAL
4	2438.00	114.38			83.66	2.94	0.00	27.78	Peak	77	100	VERTICAL
5	2484.10	43.46	54.00	-10.54	12.77	2.96	0.00	27.73	Average	77	100	VERTICAL
6	2484.30	54.47	74.00	-19.53	23.78	2.96	0.00	27.73	Peak	77	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2461.20	105.84			75.13	2.95	0.00	27.76	Average	91	100	VERTICAL
2	2463.00	109.94			79.23	2.95	0.00	27.76	Peak	91	100	VERTICAL
3	2487.50	53.94	74.00	-20.06	23.27	2.97	0.00	27.70	Peak	91	100	VERTICAL
4	2487.50	46.94	54.00	-7.06	16.27	2.97	0.00	27.70	Average	91	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Chain 1 / 1TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2388.40	66.37	74.00	-7.63	35.59	2.91	0.00	27.87	Peak	77	100	VERTICAL
2	! 2390.00	51.91	54.00	-2.09	21.13	2.91	0.00	27.87	Average	77	100	VERTICAL
3	p 2405.60	111.06			80.30	2.92	0.00	27.84	Peak	77	100	VERTICAL
4	a 2409.40	101.18			70.42	2.92	0.00	27.84	Average	77	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2389.60	67.71	74.00	-6.29	36.93	2.91	0.00	27.87	Peak	77	100	VERTICAL
2	! 2390.00	52.44	54.00	-1.56	21.66	2.91	0.00	27.87	Average	77	100	VERTICAL
3	a 2439.20	108.39			77.67	2.94	0.00	27.78	Average	77	100	VERTICAL
4	p 2439.80	117.95			87.23	2.94	0.00	27.78	Peak	77	100	VERTICAL
5	! 2483.50	49.22	54.00	-4.78	18.53	2.96	0.00	27.73	Average	77	100	VERTICAL
6	2484.10	65.88	74.00	-8.12	35.19	2.96	0.00	27.73	Peak	77	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	p 2455.60	110.15			79.44	2.95	0.00	27.76	Peak	91	100	VERTICAL
2	a 2464.00	100.59			69.88	2.95	0.00	27.76	Average	91	100	VERTICAL
3	2483.50	62.18	74.00	-11.82	31.49	2.96	0.00	27.73	Peak	91	100	VERTICAL
4	! 2483.50	51.22	54.00	-2.78	20.53	2.96	0.00	27.73	Average	91	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sean Ku	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 / 2TX
<b>Test Date</b>	Mar. 07, 2013	<b>Test Mode</b>	Mode 3

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2389.60	67.30	74.00	-6.70	36.52	2.91	0.00	27.87	Peak	93	100	VERTICAL
2	2389.80	52.31	54.00	-1.69	21.53	2.91	0.00	27.87	Average	93	100	VERTICAL
3	2405.40	114.59			83.83	2.92	0.00	27.84	Peak	93	100	VERTICAL
4	2405.60	105.14			74.38	2.92	0.00	27.84	Average	93	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2389.80	57.08	74.00	-16.92	26.30	2.91	0.00	27.87	Peak	91	100	VERTICAL
2	2390.00	44.72	54.00	-9.28	13.94	2.91	0.00	27.87	Average	91	100	VERTICAL
3	2439.00	107.06			76.34	2.94	0.00	27.78	Average	91	100	VERTICAL
4	2439.60	116.63			85.91	2.94	0.00	27.78	Peak	91	100	VERTICAL
5	2483.50	45.89	54.00	-8.11	15.20	2.96	0.00	27.73	Average	91	100	VERTICAL
6	2484.30	58.14	74.00	-15.86	27.45	2.96	0.00	27.73	Peak	91	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2454.80	103.49			72.78	2.95	0.00	27.76	Average	93	100	VERTICAL
2	2455.80	113.08			82.37	2.95	0.00	27.76	Peak	93	100	VERTICAL
3	2483.50	47.63	54.00	-6.37	16.94	2.96	0.00	27.73	Average	93	100	VERTICAL
4	2483.90	59.75	74.00	-14.25	29.06	2.96	0.00	27.73	Peak	93	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


For 1TX

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level / Chain 1

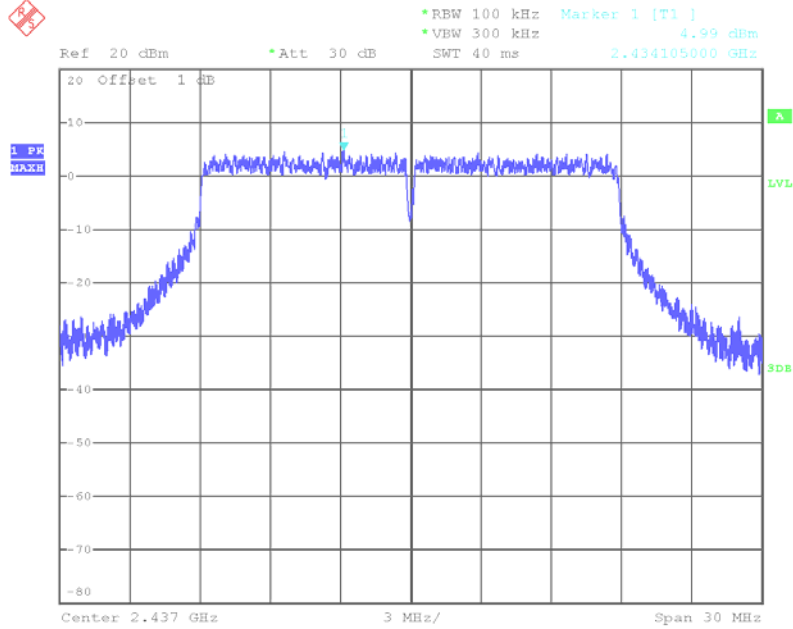


Date: 12.APR.2013 22:39:07

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc) / Chain 1

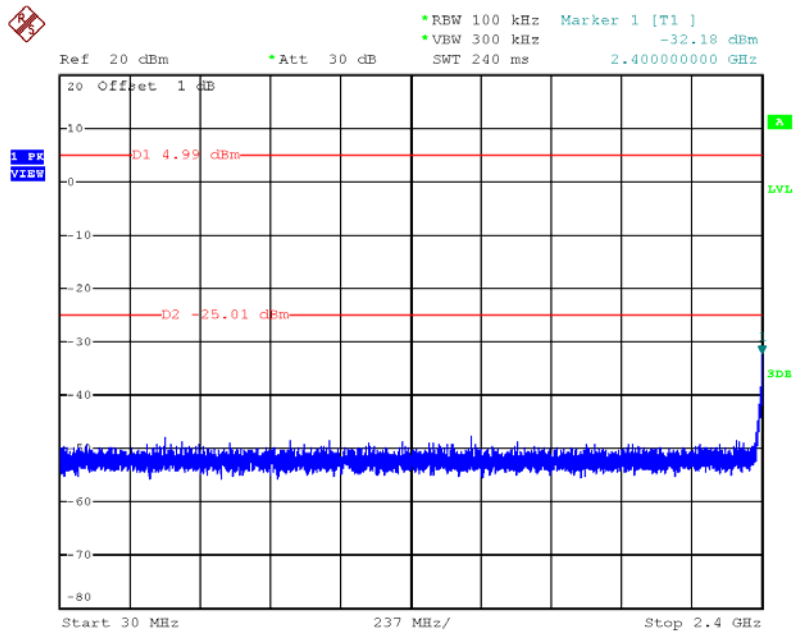


Date: 12.APR.2013 22:39:52

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 2500MHz~26500MHz (down 30dBc) / Chain 1

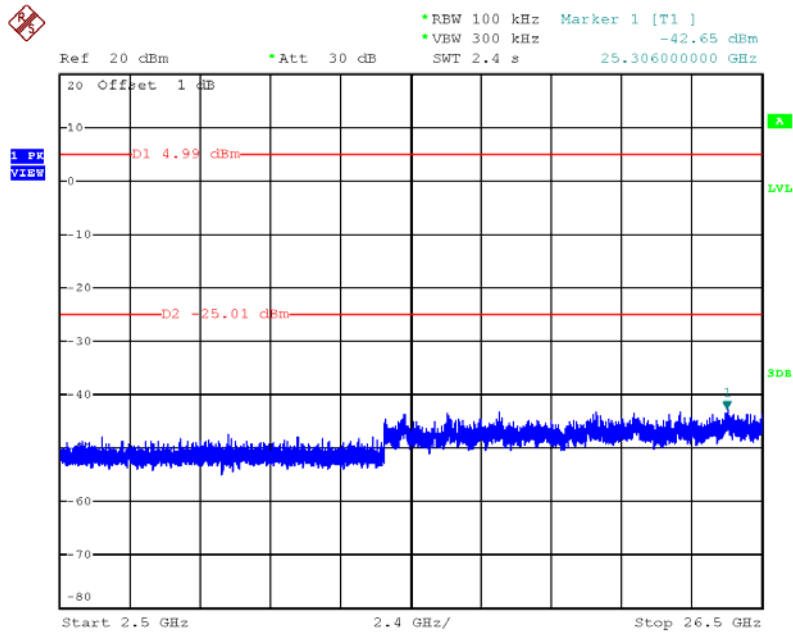


Date: 12.APR.2013 22:40:27

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 30MHz~2400MHz (down 30dBc) / Chain 1

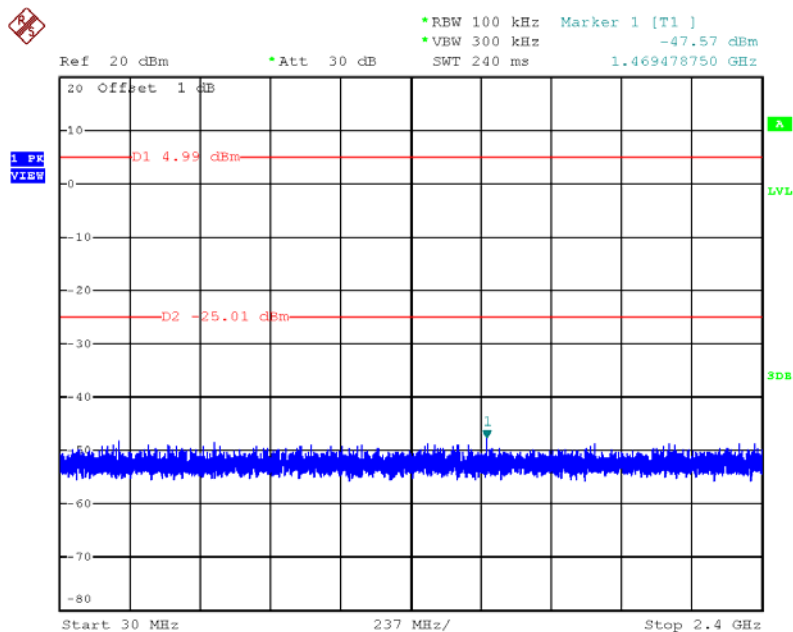

Date: 12.APR.2013 22:41:22


Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc) / Chain 1

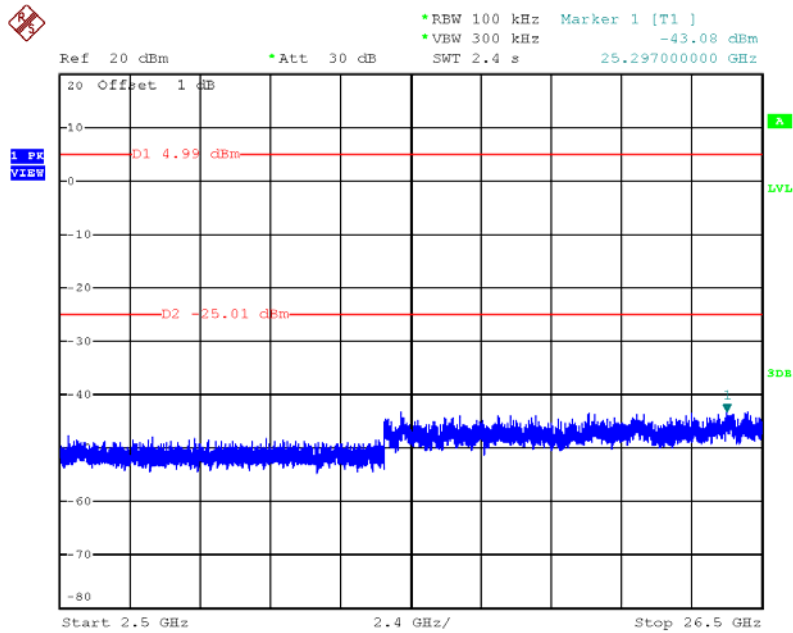

Date: 12.APR.2013 22:40:58


For 2TX

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level / Chain 1 + Chain 2

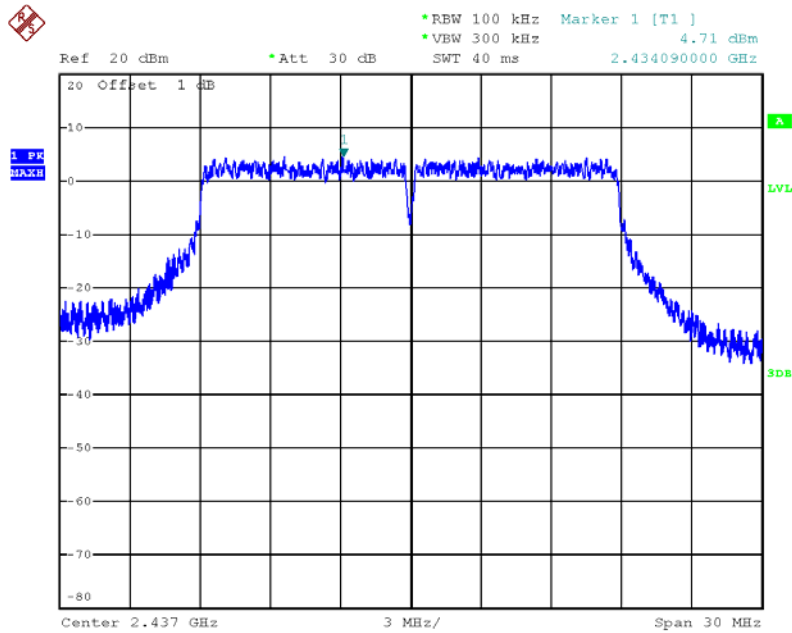

Date: 12.APR.2013 22:53:32

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc) / Chain 1 + Chain 2

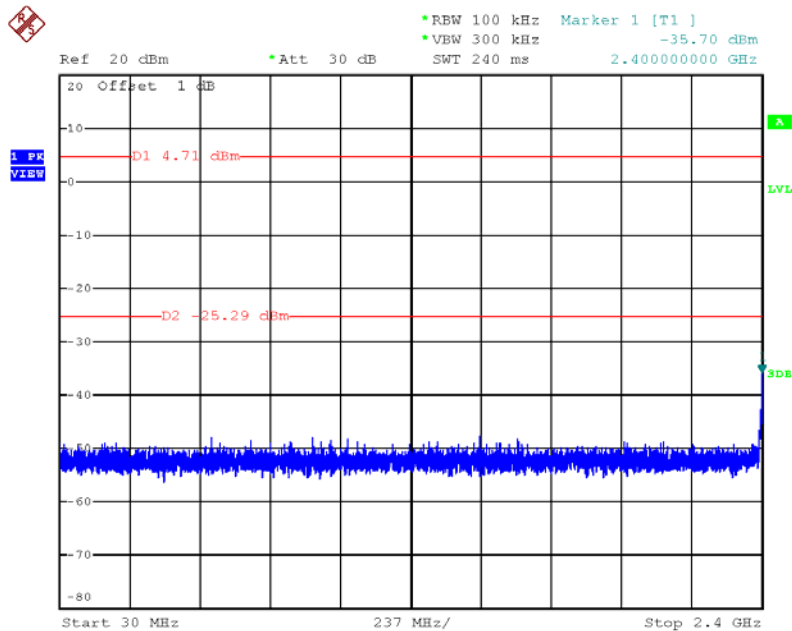


Date: 12.APR.2013 22:54:37






Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc) / Chain 1 + Chain 2

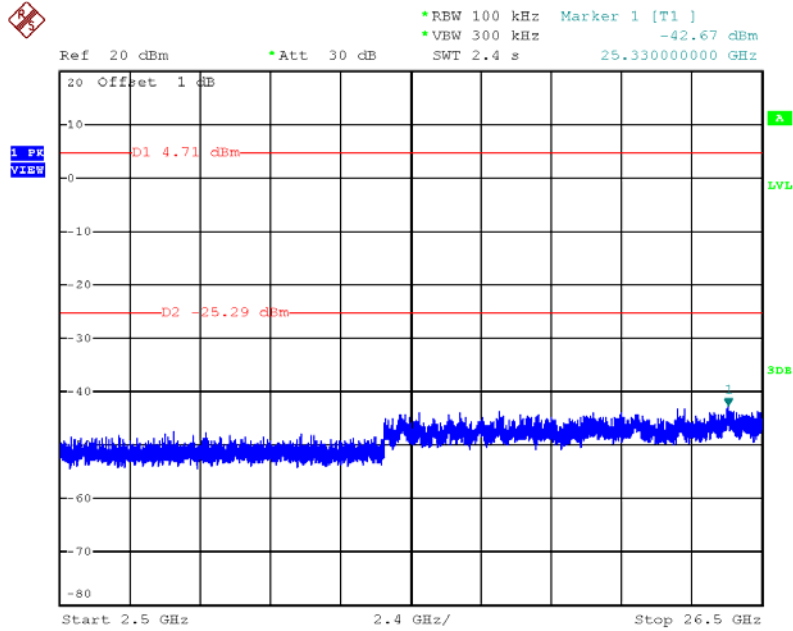

Date: 12.APR.2013 22:55:51


For 2TX

Plot on Configuration IEEE 802.11n MCS8 20MHz / Reference Level / Chain 1 + Chain 2

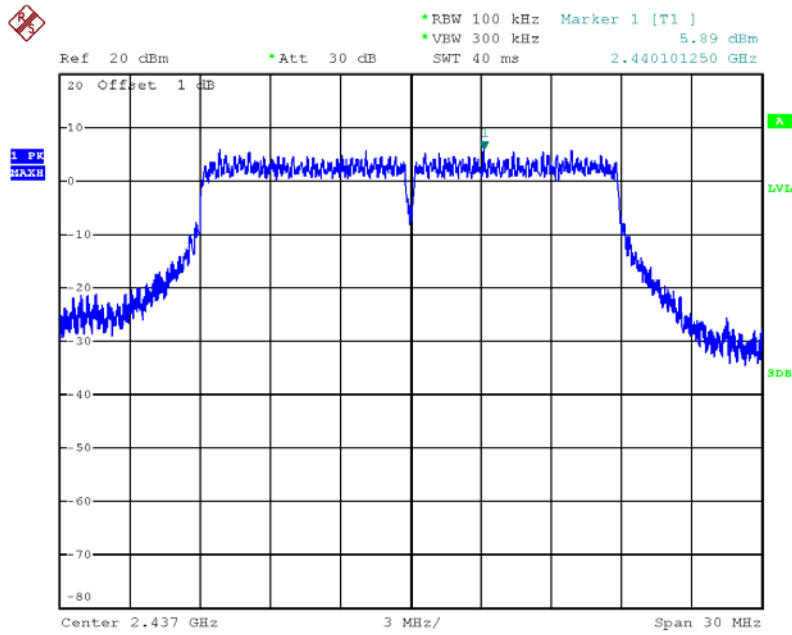

Date: 12.APR.2013 22:57:43


Plot on Configuration IEEE 802.11n MCS8 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc) / Chain 1 + Chain 2

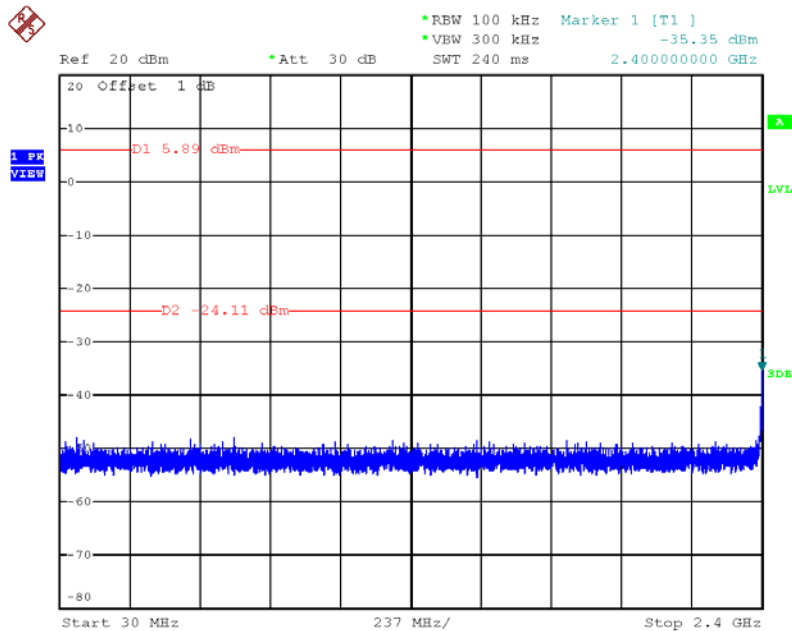

Date: 12.APR.2013 22:58:37




Plot on Configuration IEEE 802.11n MCS8 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc) / Chain 1 + Chain 2

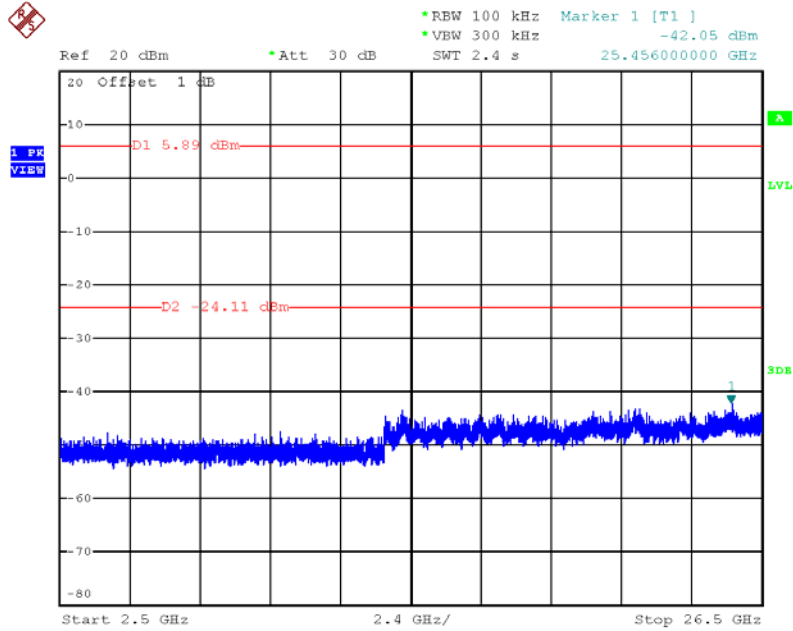

Date: 12.APR.2013 22:59:54


For 1TX

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level / Chain 1

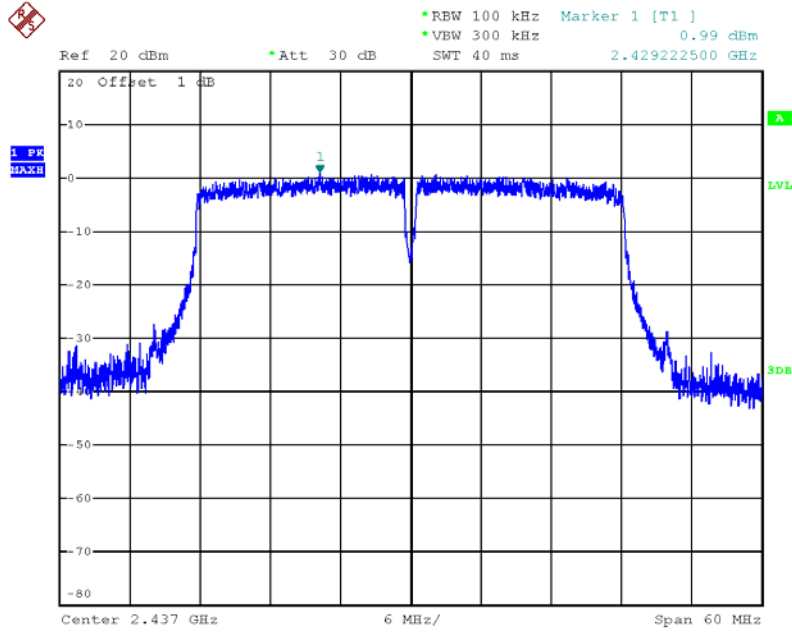


Date: 12.APR.2013 22:42:35

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 30MHz~2400MHz (down 30dBc) / Chain 1

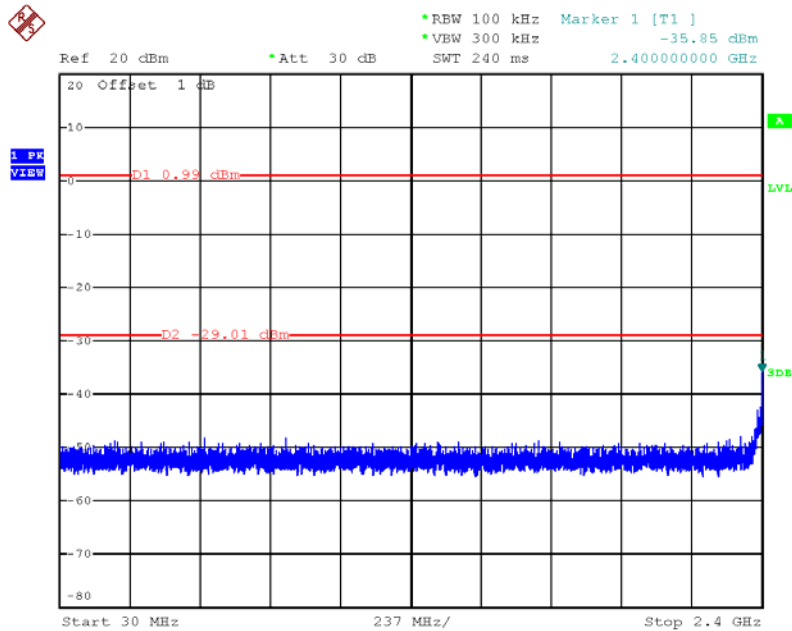


Date: 12.APR.2013 22:43:27

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 2500MHz~26500MHz (down 30dBc) / Chain 1

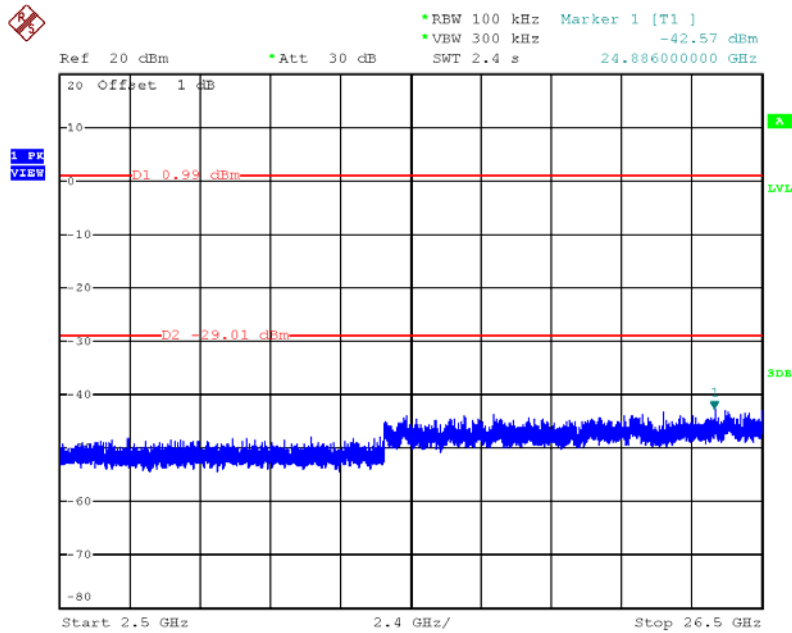


Date: 12.APR.2013 22:43:56

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 30MHz~2400MHz (down 30dBc) / Chain 1

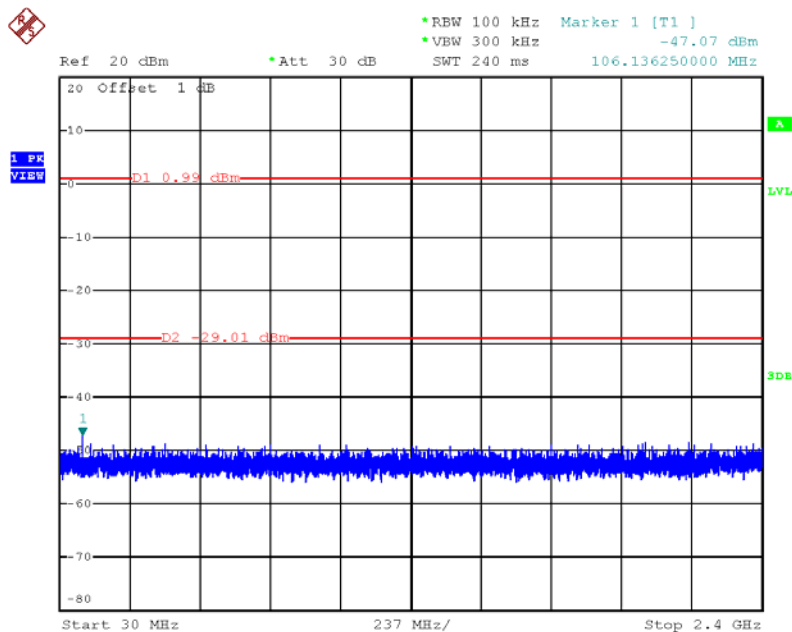

Date: 12.APR.2013 22:44:52


Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 2500MHz~26500MHz (down 30dBc) / Chain 1

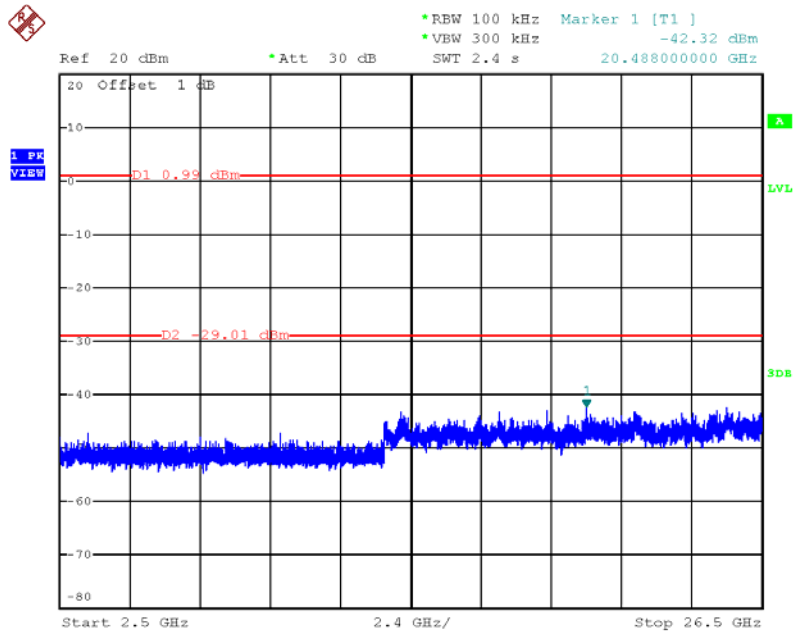

Date: 12.APR.2013 22:44:24


For 2TX

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level / Chain 1 + Chain 2

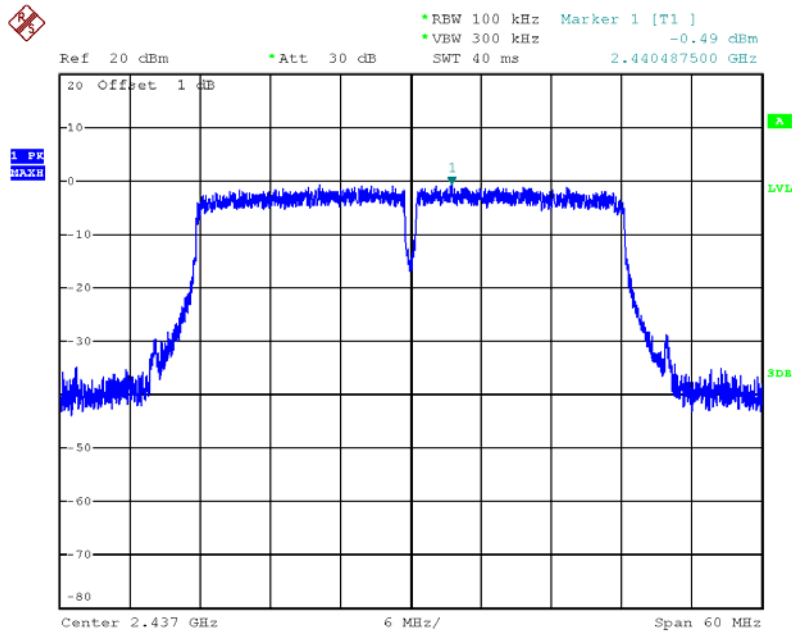


Date: 12.APR.2013 23:01:34

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 30MHz~2400MHz (down 30dBc) / Chain 1 + Chain 2

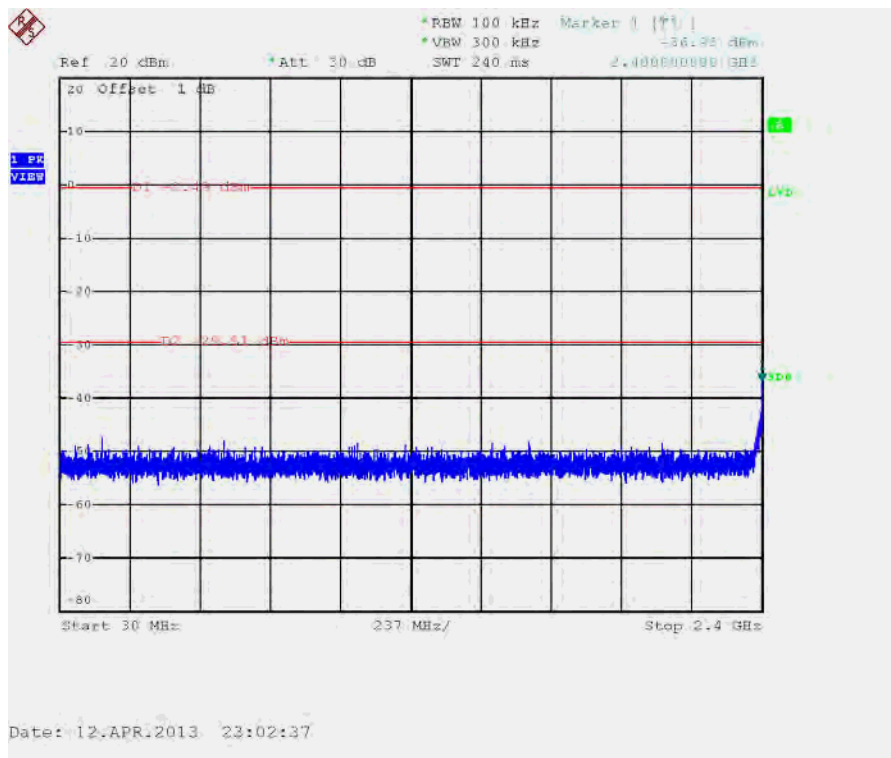





**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 2500MHz~26500MHz (down 30dBc) / Chain 1 + Chain 2**

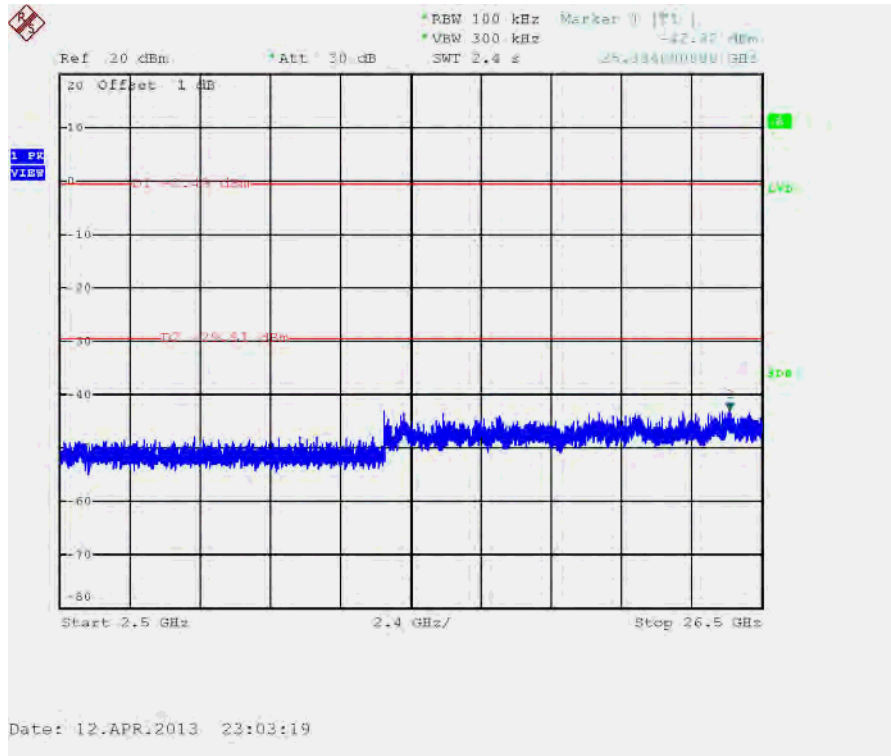

**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 30MHz~2400MHz (down 30dBc) / Chain 1 + Chain 2**

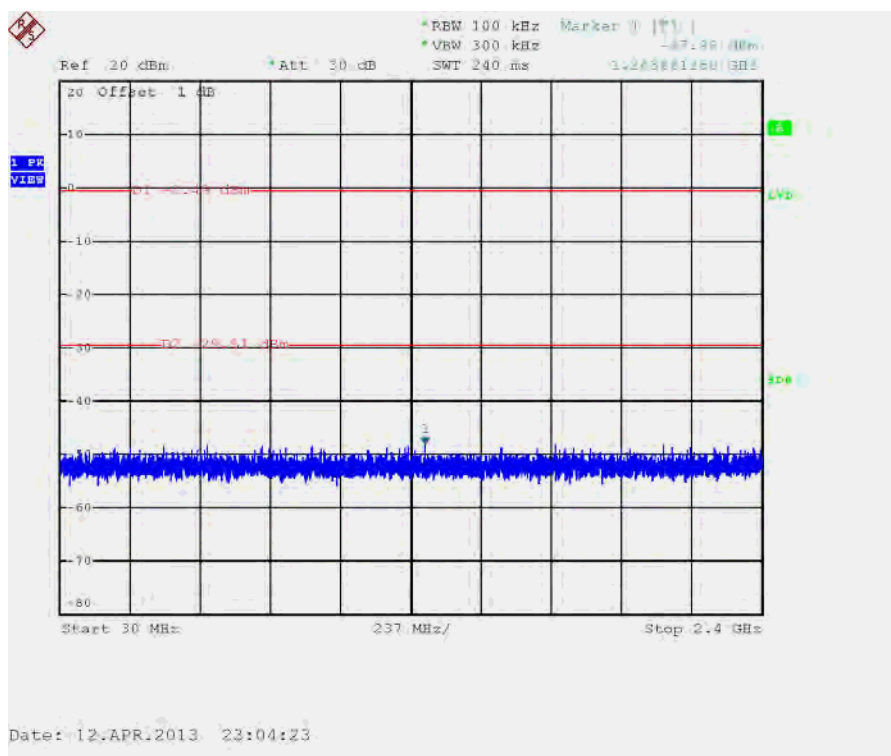


Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 2500MHz~26500MHz (down 30dBc) / Chain 1 + Chain 2

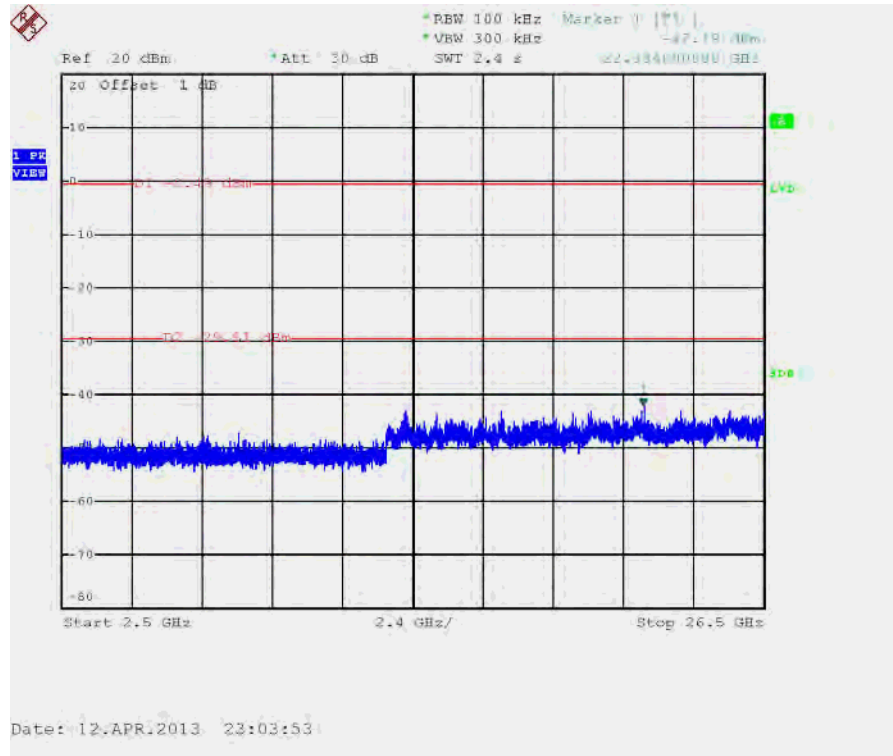


For 2TX

Plot on Configuration IEEE 802.11n MCS8 40MHz / Reference Level / Chain 1 + Chain 2

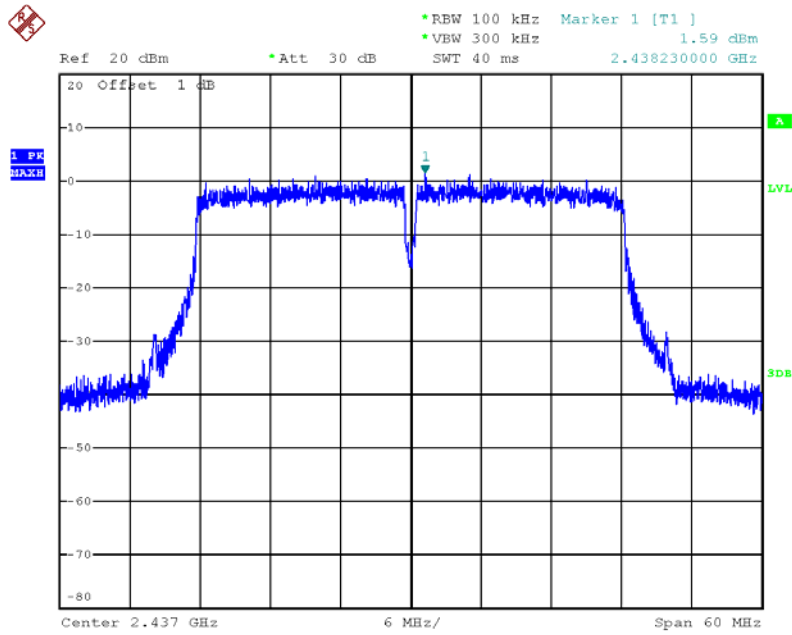


Date: 12.APR.2013 23:06:56

Plot on Configuration IEEE 802.11n MCS8 40MHz / CH 3 / 30MHz~2400MHz (down 30dBc) / Chain 1 + Chain 2

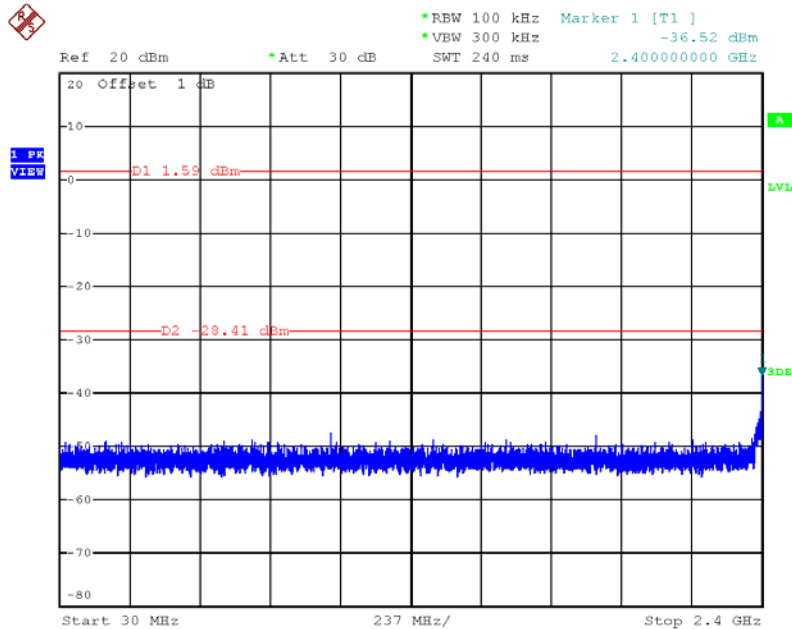


Date: 12.APR.2013 23:08:46

Plot on Configuration IEEE 802.11n MCS8 40MHz / CH 3 / 2500MHz~26500MHz (down 30dBc) / Chain 1 + Chain 2

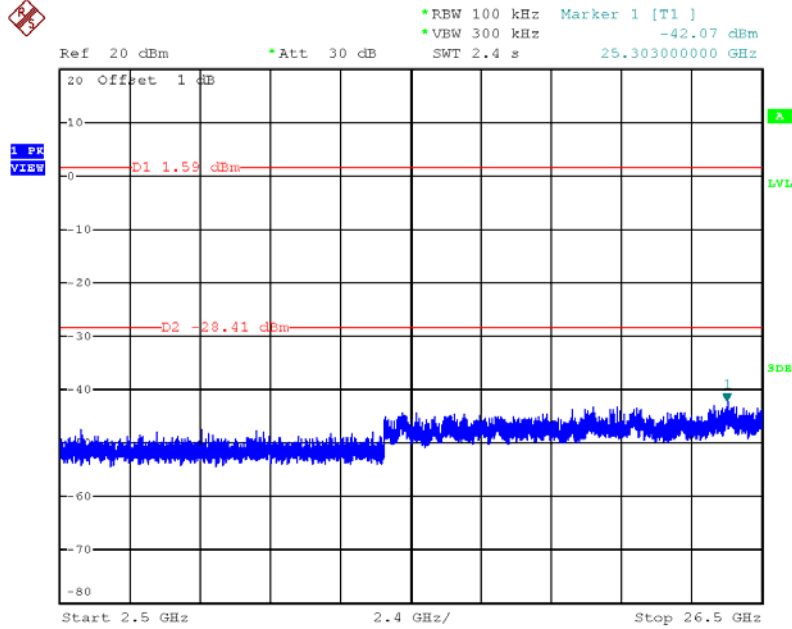


Date: 12.APR.2013 23:09:11

Plot on Configuration IEEE 802.11n MCS8 40MHz / CH 9 / 30MHz~2400MHz (down 30dBc) / Chain 1 + Chain 2

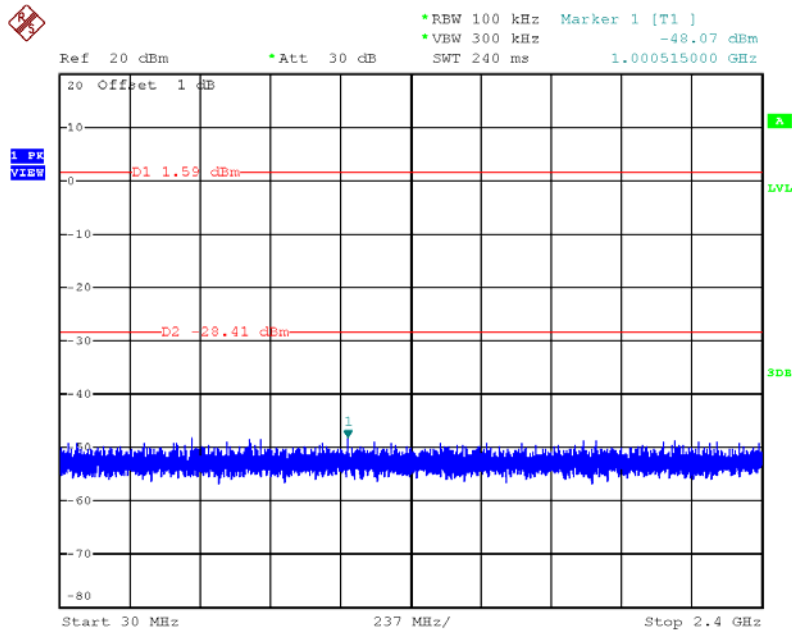

Date: 12.APR.2013 23:10:13


Plot on Configuration IEEE 802.11n MCS8 40MHz / CH 9 / 2500MHz~26500MHz (down 30dBc) / Chain 1 + Chain 2

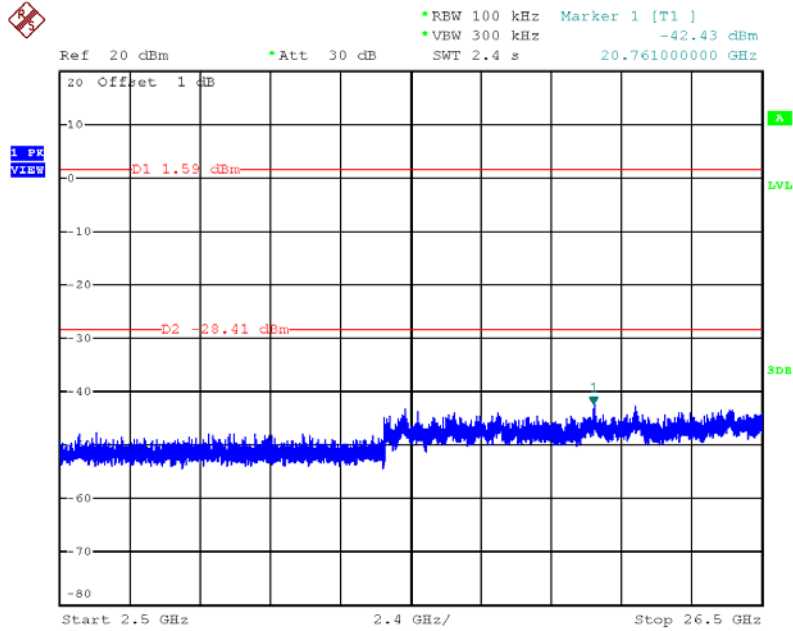

Date: 12.APR.2013 23:09:47


For 1TX

Plot on Configuration IEEE 802.11b / Reference Level / Chain 1

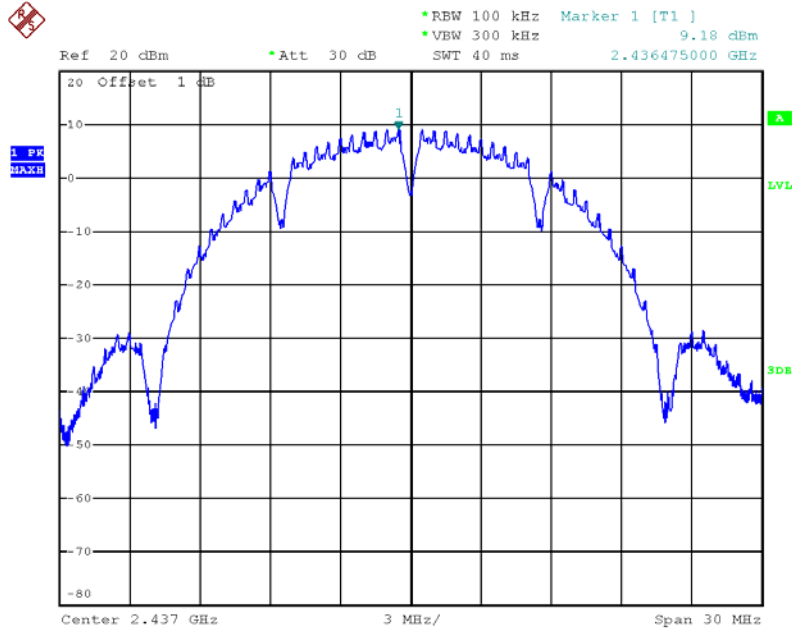


Date: 12.APR.2013 22:28:09

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc) / Chain 1

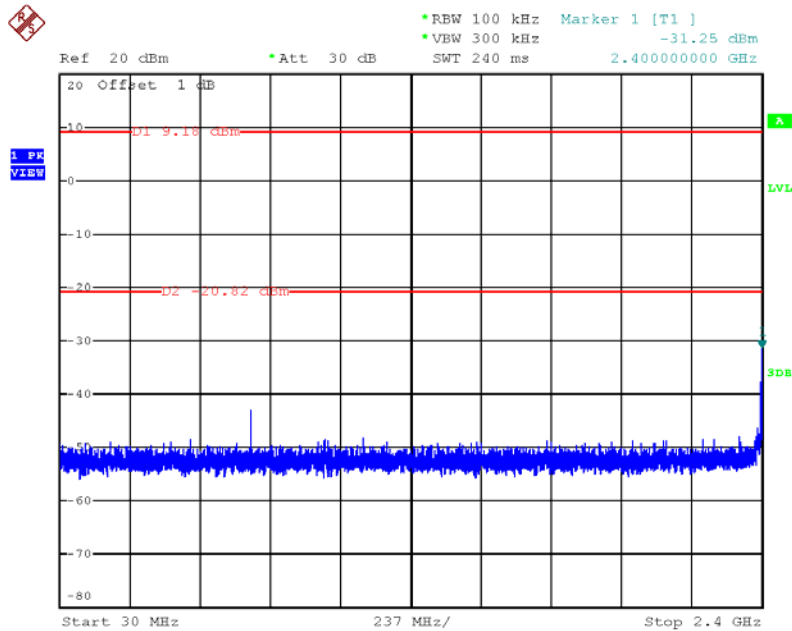


Date: 12.APR.2013 22:29:51

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc) / Chain 1

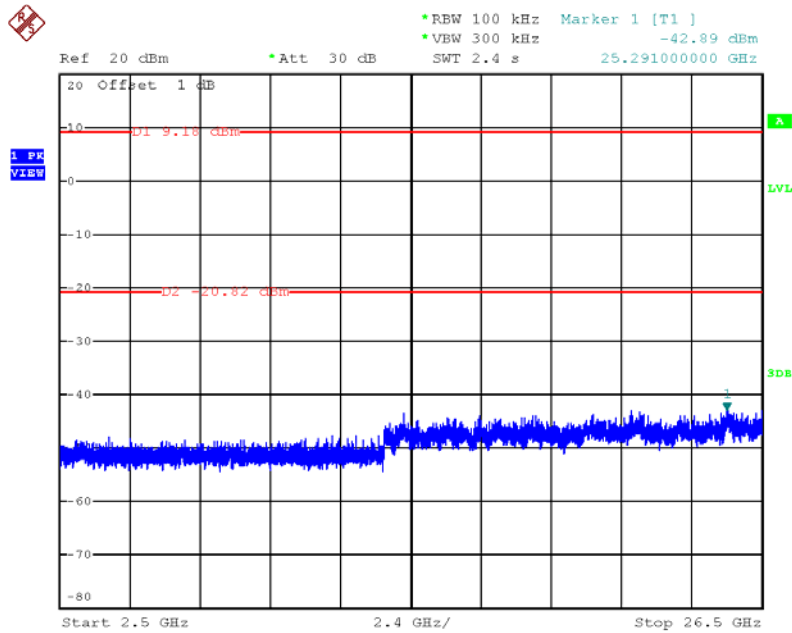


Date: 12.APR.2013 22:30:29

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc) / Chan 1

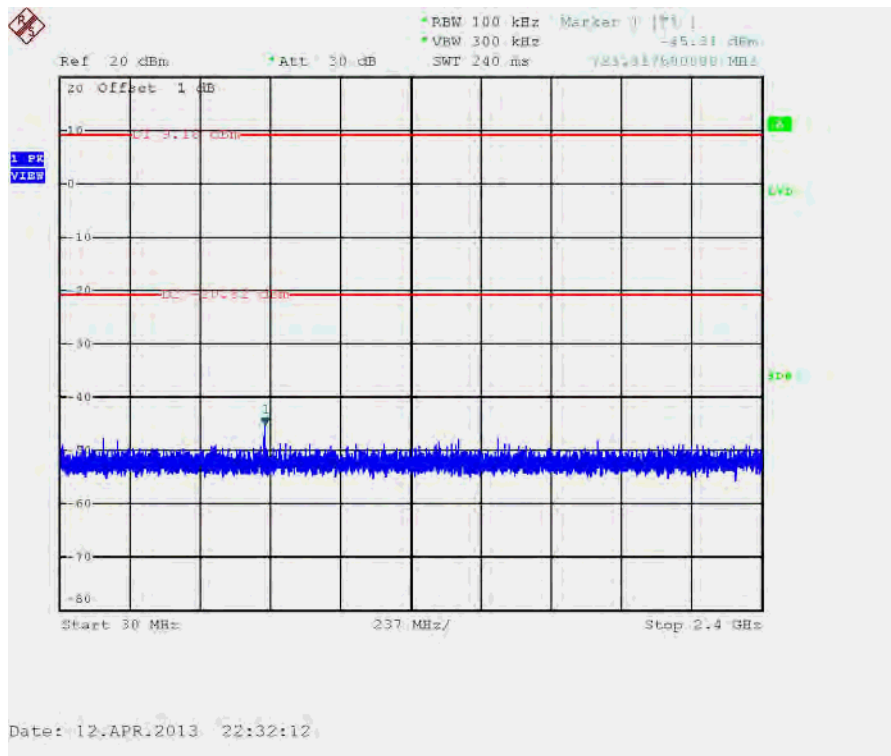

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc) / Chain 1

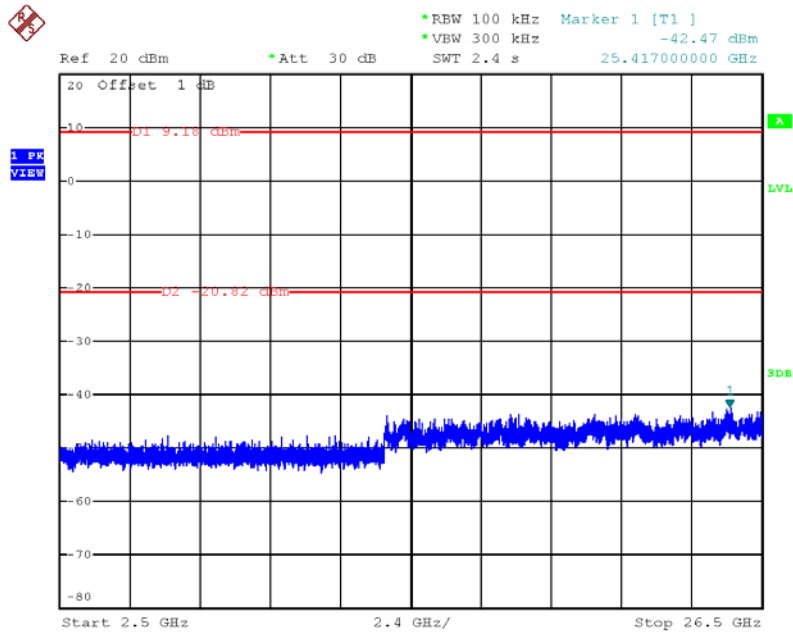


Date: 12.APR.2013 22:31:09




For 1TX

Plot on Configuration IEEE 802.11g / Reference Level / Chain 1

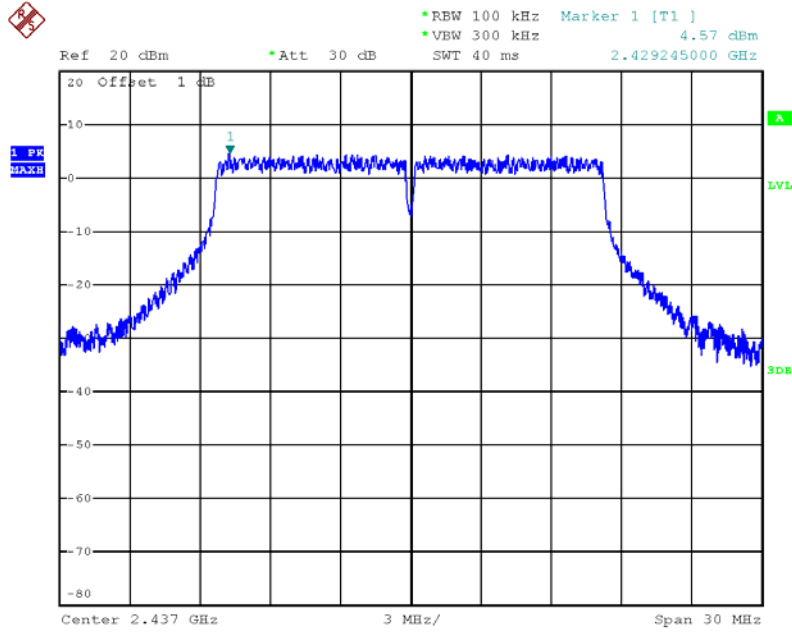


Date: 12.APR.2013 22:33:48

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc) / Chain 1

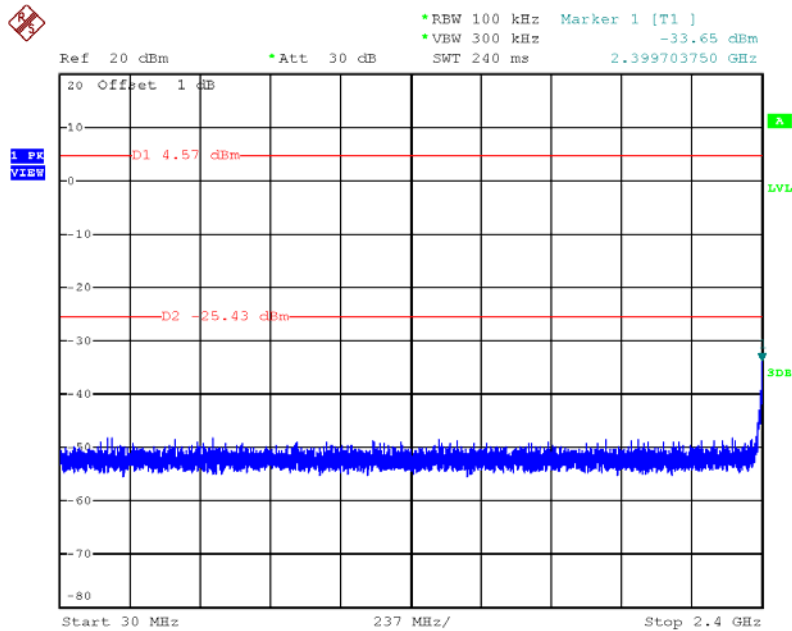


Date: 12.APR.2013 22:36:39

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~2650MHz (down 30dBc) / Chain 1

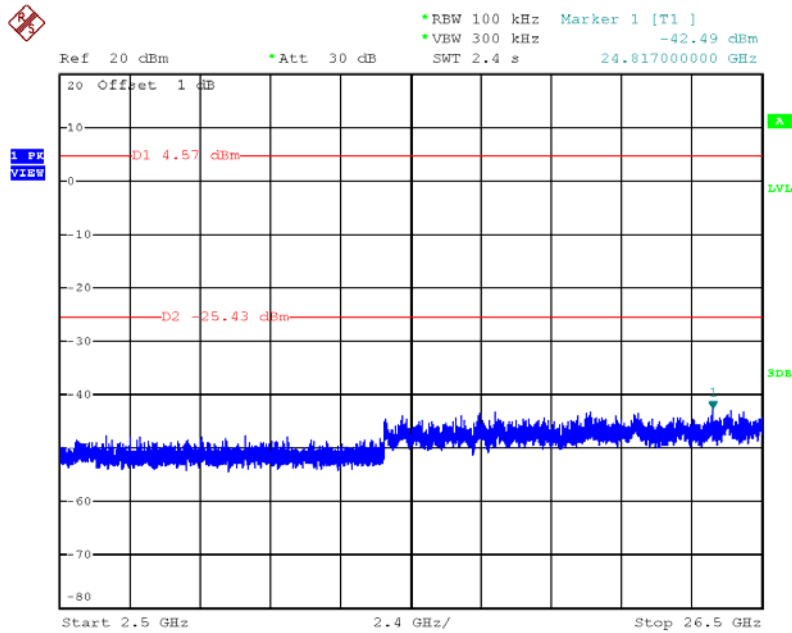


Date: 12.APR.2013 22:36:16

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc) / Chain 1

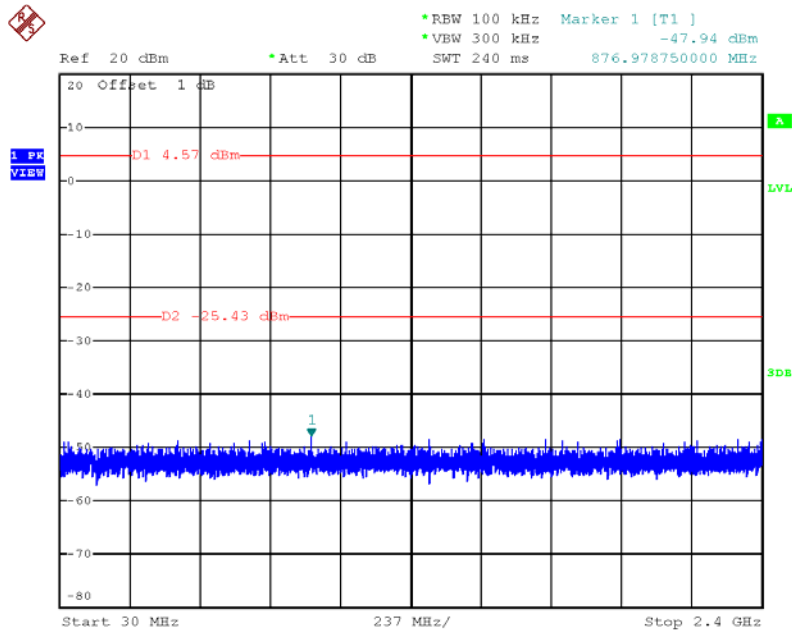

Date: 12.APR.2013 22:37:13


Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc) / Chain 1

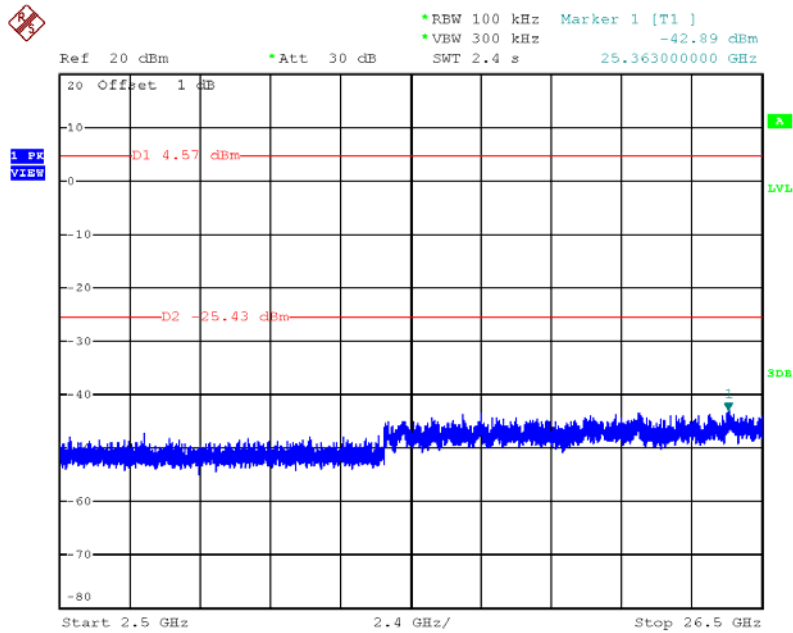

Date: 12.APR.2013 22:37:43


For 2TX

Plot on Configuration IEEE 802.11g / Reference Level / Chain 1 + Chain 2

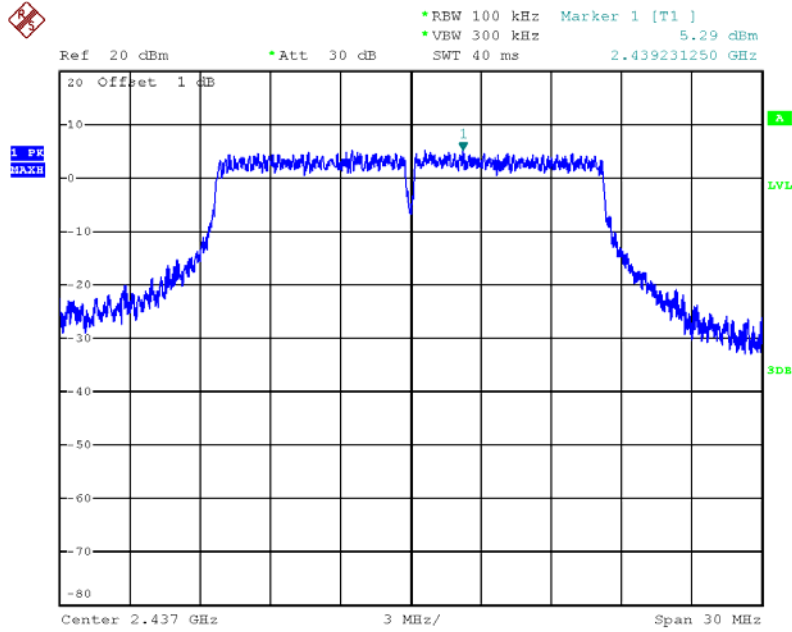


Date: 12.APR.2013 22:49:05

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc) / Chain 1 + Chain 2

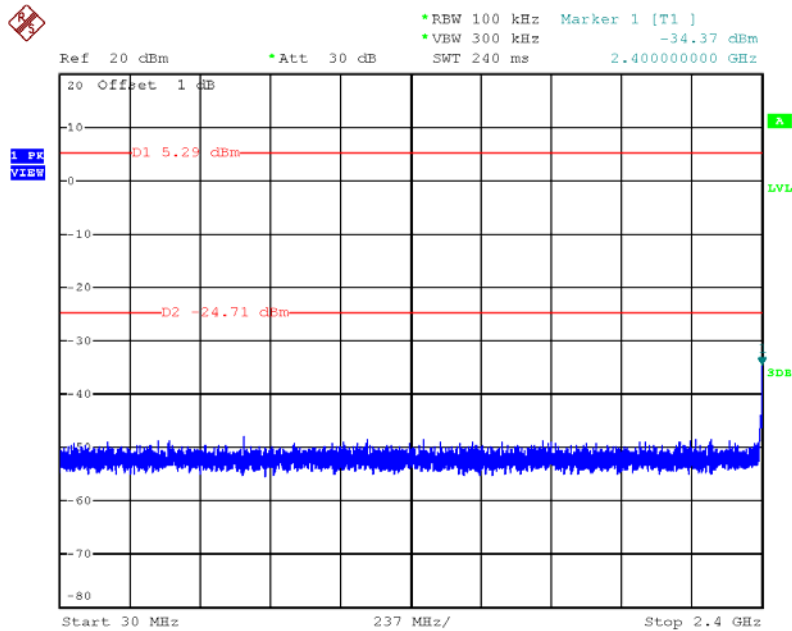


Date: 12.APR.2013 22:50:12

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc) / Chain 1 + Chain 2

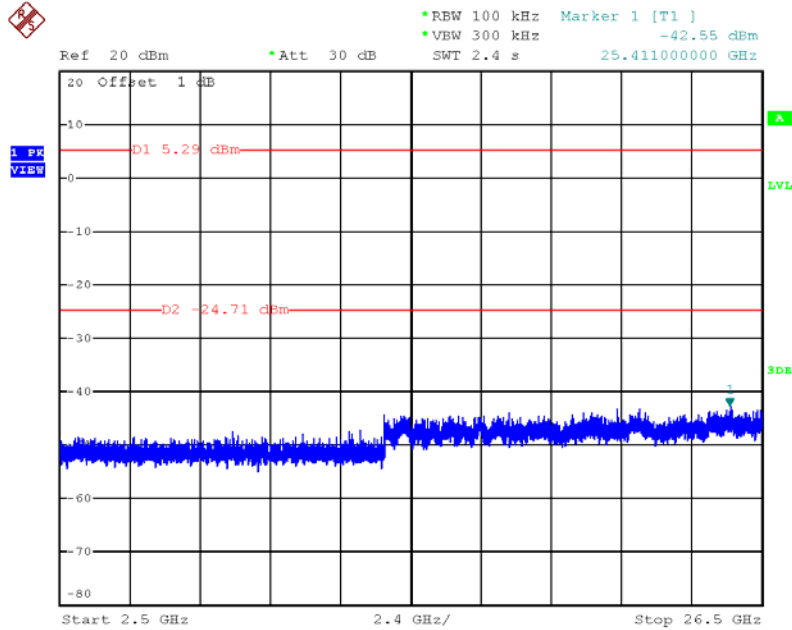


Date: 12.APR.2013 22:50:44

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc) / Chain 1 + Chain 2

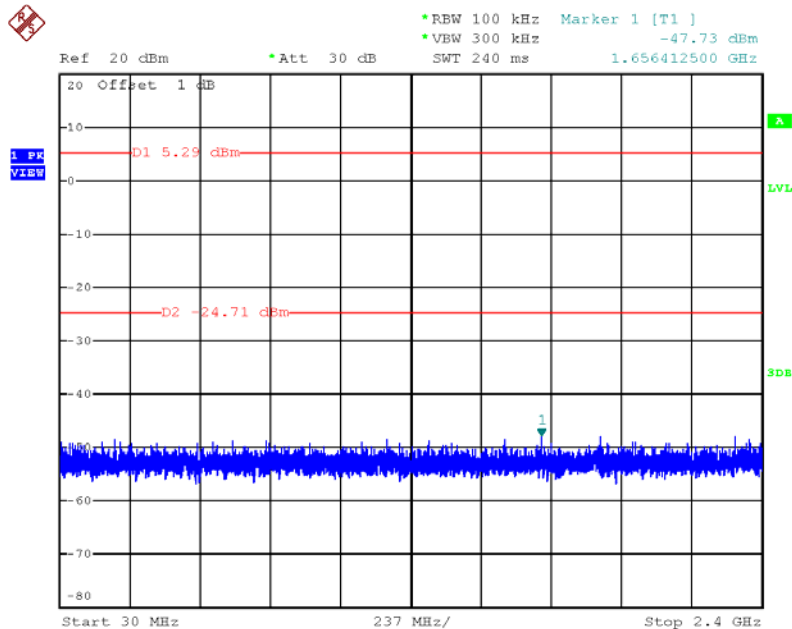

Date: 12.APR.2013 22:51:43

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc) / Chain 1 + Chain 2

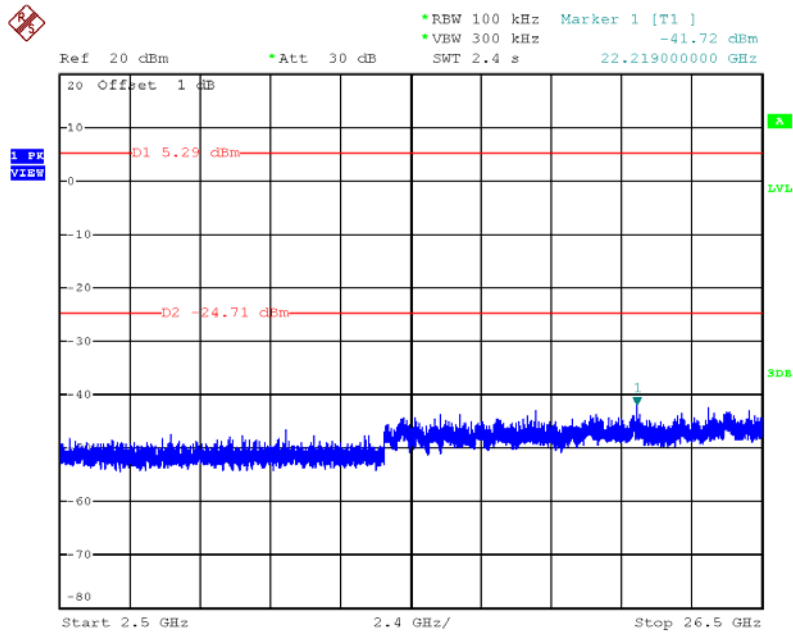

Date: 12.APR.2013 22:51:16

## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9kHz ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085